



MEASUREMENT REPORT

FCC PART 15.247 Bluetooth

FCC ID: HLEMS852BBT
APPLICANT: Unitech Electronics Co., Ltd.
Application Type: Certification
Product: Bluetooth Barcode Scanner
Model No.: MS852B
Serial Model: MS852B Plus, MS851B
FCC Classification: (DSS) FCC Part 15 Spread Spectrum Transmitter
FCC Rule Part(s): Part 15.247
Test Procedure(s): ANSI C63.10-2013
Received Date: October 1, 2019
Test Date: October 30, 2019 ~ January 3, 2020

Tested By : *Peter Syu*
(Peter Syu)
Reviewed By : *Paddy Chen*
(Paddy Chen)
Approved By : *Chenz Ker*
(Chenz Ker)



The test results only relate to the tested sample.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2014. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.



Revision History

Report No.	Version	Description	Issue Date	Note
1910TW2601-U1	1.0	Original Report	2020-01-10	

CONTENTS

Description	Page
1. INTRODUCTION	7
1.1. Scope	7
1.2. MRT Test Location	7
2. PRODUCT INFORMATION	8
2.1. Equipment Description	8
2.2. Model Difference Description	8
2.3. Product Specification Subjective to this Standard	9
2.4. Test Mode	9
2.5. Operation Frequency / Channel List	10
2.6. Test Configuration	11
2.7. Test Software	11
2.8. EMI Suppression Device(s)/Modifications	11
2.9. Labeling Requirements	11
3. DESCRIPTION of TEST	12
3.1. Evaluation Procedure	12
3.2. AC Line Conducted Emissions	12
3.3. Radiated Emissions	13
4. ANTENNA REQUIREMENTS	14
5. TEST EQUIPMENT CALIBRATION DATE	15
6. MEASUREMENT UNCERTAINTY	16
7. TEST RESULT	17
7.1. Summary	17
7.2. 20dB Bandwidth Measurement	18
7.2.1. Test Limit	18
7.2.2. Test Procedure used	18
7.2.3. Test Setting	18
7.2.4. Test Setup	18
7.2.5. Test Result	19
7.3. Output Power Measurement	21
7.3.1. Test Limit	21
7.3.2. Test Procedure Used	21
7.3.3. Test Setting	22

7.3.4.	Test Setup	22
7.3.5.	Test Result.....	23
7.4.	Carrier Frequency Separation Measurement	26
7.4.1.	Test Limit	26
7.4.2.	Test Procedure Used	26
7.4.3.	Test Setting.....	26
7.4.4.	Test Setup	26
7.4.5.	Test Result.....	27
7.5.	Number of Hopping Channels Measurement	29
7.5.1.	Test Limit	29
7.5.2.	Test Procedure Used	29
7.5.3.	Test Setting.....	29
7.5.4.	Test Setup	29
7.5.5.	Test Result.....	30
7.6.	Time of Occupancy Measurement	31
7.6.1.	Test Limit	31
7.6.2.	Test Procedure Used	31
7.6.3.	Test Setting.....	31
7.6.4.	Test Setup	31
7.6.5.	Test Result.....	32
7.7.	Out-of-Band Spurious Emissions Emissions Measurement	35
7.7.1.	Test Limit	35
7.7.2.	Test Procedure Used	35
7.7.3.	Test Setting.....	36
7.7.4.	Test Setup	36
7.7.5.	Test Result.....	37
7.8.	Radiated Spurious Emission Measurement	43
7.8.1.	Test Limit	43
7.8.2.	Test Procedure Used	43
7.8.3.	Test Setting.....	43
7.8.4.	Test Setup	45
7.8.5.	Test Result.....	47
7.9.	Radiated Restricted Band Edge Measurement	65
7.9.1.	Test Limit	65
7.9.2.	Test Procedure Used	65
7.9.3.	Test Setting.....	65
7.9.4.	Test Setup	67
7.9.5.	Test Result.....	68

7.10. AC Conducted Emissions Measurement	78
7.10.1. Test Limit	78
7.10.2. Test Setup	78
7.10.3. Test Result.....	79
8. CONCLUSION	81
Appendix A - Test Photograph.....	錯誤! 尚未定義書籤。
Appendix B - External Photograph.....	錯誤! 尚未定義書籤。
Appendix C - Internal Photograph.....	錯誤! 尚未定義書籤。

§2.1033 General Information

Applicant	Unitech Electronics Co., Ltd.
Applicant Address	5F., No. 136, Ln. 235, Baoqiao Rd., Xindian Dist., New Taipei City 231, Taiwan (R.O.C.)
Manufacturer	Unitech Electronics Co., Ltd.
Manufacturer Address	5F., No. 136, Ln. 235, Baoqiao Rd., Xindian Dist., New Taipei City 231, Taiwan (R.O.C.)
Test Site	MRT Technology (Taiwan) Co., Ltd
Test Site Address	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
MRT FCC Registration No.	291082
FCC Rule Part(s)	Part 15.247
Model No.	MS852B, MS852B Plus, MS851B
Test Device Serial No.	N/A ☐ Production ☒ Pre-Production ☐ Engineering

Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Taiwan, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

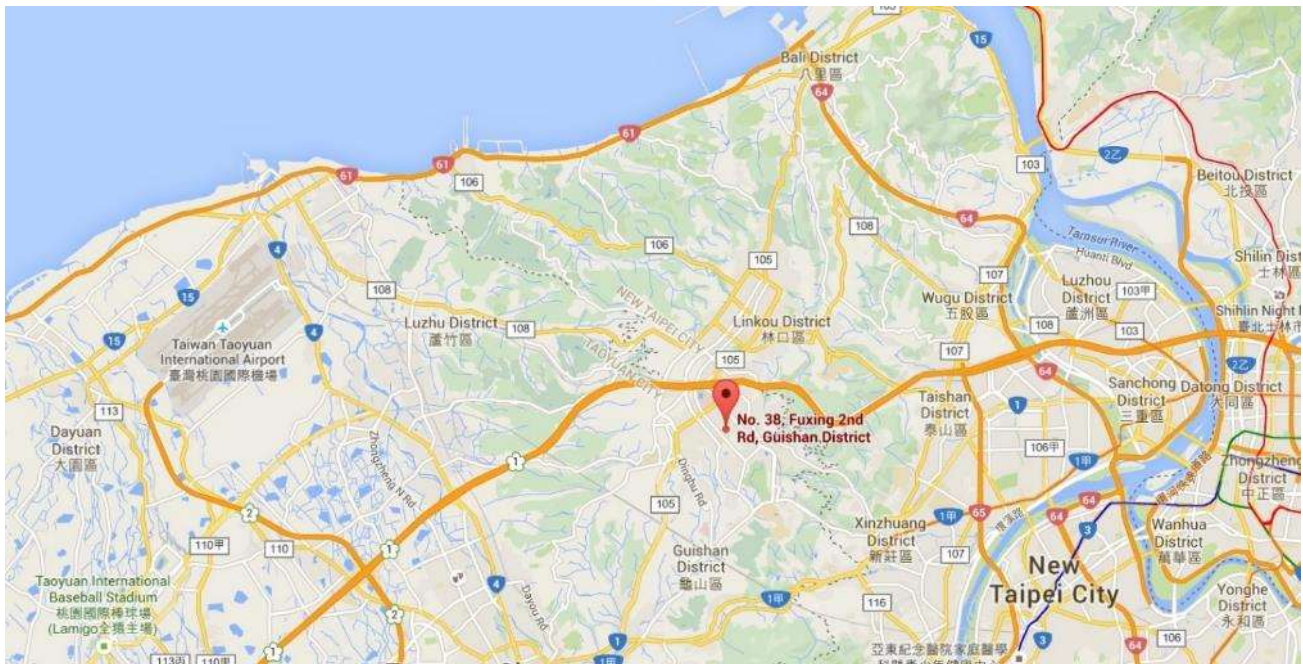

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Bluetooth Barcode Scanner
Model No.	MS852B
Serial Model	MS852B Plus, MS851B
Supports Radios Spec.	Bluetooth Dual Mode: V4.2+EDR
Scanner Input	From Battery: DC 3.6V From Cradle: DC 5V, 0.5A
Maximum Output Power	7.779dBm

Note: The test was performed base on MS852B .

2.2. Model Difference Description

The difference of models only for Optical Engine different, the other hardware was the same.

MS852B, Optical Engine Model: SE2707

MS852B plus, Optical Engine Model: N6703

MS851B, Optical Engine Model: SE965

2.3. Product Specification Subjective to this Standard

Operating Frequency	2402~2480MHz
Type of modulation	FHSS (GFSK, $\pi/4$ DQPSK, 8DPSK)
Data Rate	1Mbps (GFSK), 2Mbps ($\pi/4$ DQPSK), 3Mbps (8DPSK)

2.4. Test Mode

Test Mode	Mode 1: Transmit - 1Mbps (GFSK) Mode 2: Transmit - 3Mbps (8DPSK)
-----------	---

Note:

1. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
2. Bluetooth operation was evaluated at both 1Mbps and 3Mbps data rates. Through pre-testing 2Mbps data rate was found, to produce emissions like those for 3Mbps.

2.5. Operation Frequency / Channel List

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2403 MHz	02	2404 MHz
03	2405 MHz	04	2406 MHz	05	2407 MHz
06	2408 MHz	07	2409 MHz	08	2410 MHz
09	2411 MHz	10	2412 MHz	11	2413 MHz
12	2414 MHz	13	2415 MHz	14	2416 MHz
15	2417 MHz	16	2418 MHz	17	2419 MHz
18	2420 MHz	19	2421 MHz	20	2422 MHz
21	2423 MHz	22	2424 MHz	23	2425 MHz
24	2426 MHz	25	2427 MHz	26	2428 MHz
27	2429 MHz	28	2430 MHz	29	2431 MHz
30	2432 MHz	31	2433 MHz	32	2434 MHz
33	2435 MHz	34	2436 MHz	35	2437 MHz
36	2438 MHz	37	2439 MHz	38	2440 MHz
39	2441 MHz	40	2442 MHz	41	2443 MHz
42	2444 MHz	43	2445 MHz	44	2446 MHz
45	2447 MHz	46	2448 MHz	47	2449 MHz
48	2450 MHz	49	2451 MHz	50	2452 MHz
51	2453 MHz	52	2454 MHz	53	2455 MHz
54	2456 MHz	55	2457 MHz	56	2458 MHz
57	2459 MHz	58	2460 MHz	59	2461 MHz
60	2462 MHz	61	2463 MHz	62	2464 MHz
63	2465 MHz	64	2466 MHz	65	2467 MHz
66	2468 MHz	67	2469 MHz	68	2470 MHz
69	2471 MHz	70	2472 MHz	71	2473 MHz
72	2474 MHz	73	2475 MHz	74	2476 MHz
75	2477 MHz	76	2478 MHz	77	2479 MHz
78	2480 MHz	N/A	N/A	N/A	N/A

2.6. Test Configuration

This device was tested per the guidance of ANSI C63.10-2013. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.7. Test Software

The test utility software used during testing was “CC256x Bluetooth Hardware Evaluation Tool”.

2.8. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.9. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION of TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013) were used in the measurement of the **Bluetooth Barcode Scanner**.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 9'x4'x3' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50 Ω /50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions were used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.10.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable. For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beamwidth of horn antenna, the horn antenna should be always directed to the EUT when rising height.

Radiated emissions test results are shown in Section 7.8 & 7.9

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the Bluetooth Barcode Scanner, is permanently attached.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	N/A	BL871E2-HI	Chip	-1.53dBi

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions – SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2020/3/25
Cable	Rosnol	N1C50-RG400- B1C50-500CM	MRTTWE00013	1 year	2020/6/18
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2020/3/25

Radiated Emissions – AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2020/6/4
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2020/3/25
Active Loop Antenna	Schwarzbeck	FMZB 1519B	MRTTWA00002	1 year	2020/4/29
Broadband Horn antenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2020/4/22
Breitband Hornantenna	Schwarzbeck	BBHA 9170	MRTTWA00004	1 year	2020/4/23
Broadband Amplifier	Schwarzbeck	BBV 9721	MRTTWA00006	1 year	2020/4/24
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2020/4/24
Cable	HUBERSUHNER	SF106	MRTTWE00010	1 year	2020/4/22
Cable	Rosnol	K1K50-UP0264- K1K50-4M	MRTTWE00012	1 year	2020/6/18

Conducted Test Equipment – SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2020/10/2
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2020/7/11
USB Wideband Power Sensor	KEYSIGHT	U2021XA	MRTTWA00015	1 year	2020/3/26

Test Software

Software	Version	Function
e3	9.160520a	EMI Test Software
EMI	V3	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Conducted Emission- Power Line
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.53dB
Conducted Emission- Impedance Stabilization Network Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 3.96dB
Radiated Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 3.92dB (Below 30M)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 4.25dB (30M~1G)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 4.40dB (1G~18G)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 4.45dB (18G~40G)
Frequency Error
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 78.4\text{Hz}$
Conducted Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.84\text{dB}$
Conducted Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 2.65\text{ dB}$
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 3.3%
Temp. / Humidity
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.82^\circ\text{C}/ \pm 3\%$
DC Voltage
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.3\%$

7. TEST RESULT

7.1. Summary

Product Name: Bluetooth Barcode Scanner

FCC Classification: (DSS) FCC Part 15 Spread Spectrum Transmitter

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(1)	20dB Bandwidth	N/A	Conducted	PASS	Section 7.2
15.247(b)(1)	Output Power	<1 Watt if > 75 non-overlapping channels used		PASS	Section 7.3
15.247(a)(1)	Carrier Frequency Separation	25KHz or 20 dB BW for systems with Output Power < 125mW		PASS	Section 7.4
15.247(a)(1)(iii)	Number of Hopping Channels	> 15 Channels		PASS	Section 7.5
15.247(a)(1)(iii)	Time of Occupancy	< 0.4 sec in 31.6 sec period		PASS	Section 7.6
15.247(d)	Out-of-Band Emissions	Conducted $\geq$ 20dBc		PASS	Section 7.7
15.205 15.209	Spurious Emission	< FCC 15.209 limits	Radiated	PASS	Section 7.8
15.205 15.209	Band Edge Measurement	$\leq$ 74dBuV/m(Peak) $\leq$ 54dBuV/m(Average)		PASS	Section 7.9
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.10

Note:

- 1) Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.
- 2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 3) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 4) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

7.2. 20dB Bandwidth Measurement

7.2.1. Test Limit

N/A


7.2.2. Test Procedure used

ANSI C63.10-2013 - Section 6.9.2

7.2.3. Test Setting

1. Set RBW $\geq 1\%$ of the 20dB bandwidth
2. VBW $\geq 3 \times$ RBW
3. Span = approximately 2 to 5 times the 20dB bandwidth, centered on a hopping channel
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

7.2.4. Test Setup

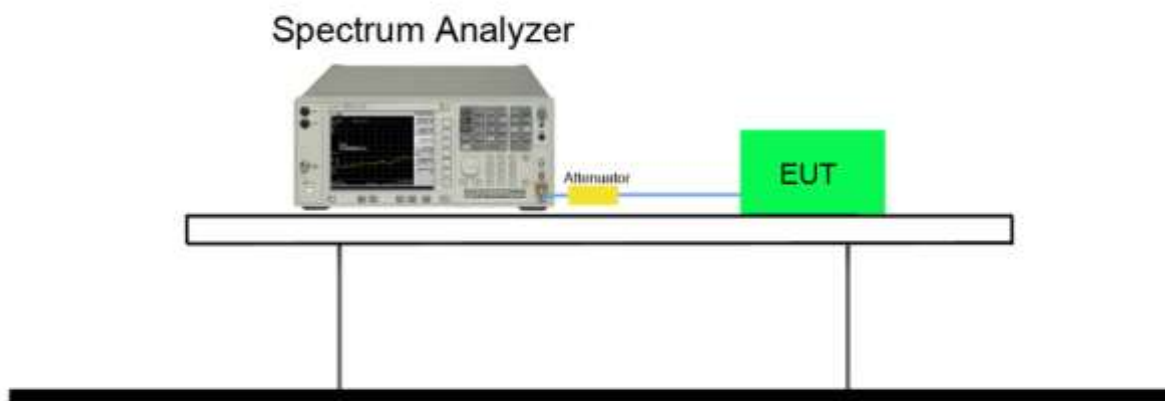

7.2.5. Test Result

Test Mode	Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)	Result
DH5(1Mbps)	00	2402	928.3	843.65	Pass
DH5(1Mbps)	39	2441	929.4	850.80	Pass
DH5(1Mbps)	78	2480	924.1	834.86	Pass
3-DH5(3Mbps)	00	2402	1304.0	1205.1	Pass
3-DH5(3Mbps)	39	2441	1300.0	1200.5	Pass
3-DH5(3Mbps)	78	2480	1303.0	1193.8	Pass

CH00 (2402MHz) DH5(1Mbps)



CH00 (2402MHz) 3-DH5(3Mbps)



CH39 (2441MHz) DH5(1Mbps)



CH39 (2480MHz) 3-DH5(3Mbps)



CH78 (2480MHz) DH5(1Mbps)



CH78 (2480MHz) 3-DH5(3Mbps)



7.3. Output Power Measurement

7.3.1. Test Limit

The maximum out power permissible output power is 1 Watt for all other frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels.


7.3.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.5

7.3.3. Test Setting

1. Set RBW $\geq$ the 20 dB bandwidth of the emission being measured.
2. VBW $\geq 3 \times$ RBW
3. Span = approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (don't forget added the external attenuation and cable loss)
8. Note: A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.

7.3.4. Test Setup

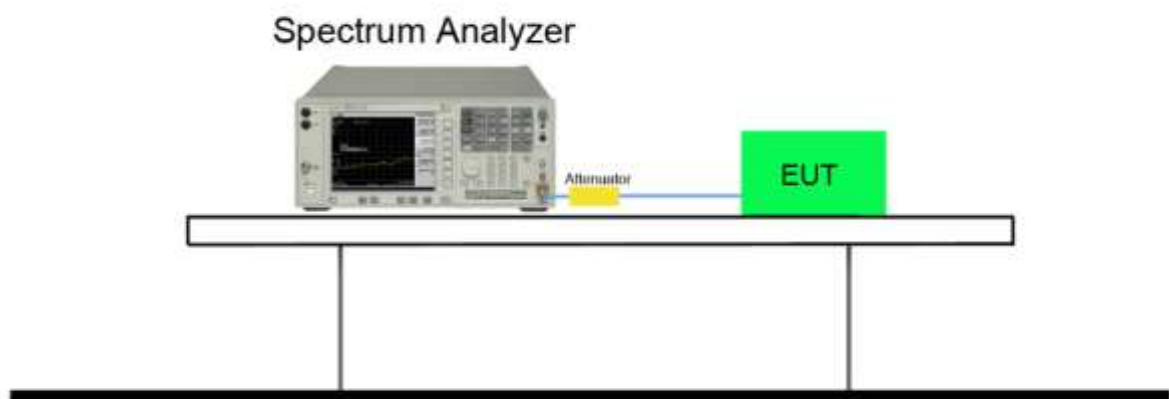

7.3.5. Test Result

MS852B:

Test Mode	Channel No.	Frequency (MHz)	Peak Power (dBm)	EIRP (dBm)	Peak Power Limit (dBm)	EIRP Limit (dBm)
DH5	00	2402	6.733	5.203	< 30	< 36
DH5	39	2441	6.622	5.092	< 30	< 36
DH5	78	2480	6.693	5.163	< 30	< 36
2DH5	00	2402	6.789	5.259	< 30	< 36
2DH5	39	2441	6.681	5.151	< 30	< 36
2DH5	78	2480	6.732	5.202	< 30	< 36
3DH5	00	2402	7.779	6.249	< 30	< 36
3DH5	39	2441	7.511	5.981	< 30	< 36
3DH5	78	2480	7.466	5.936	< 30	< 36

Note:

1. The peak power of all test modes is less than 21dBm(125mW).
2. Peak Power Output Value =Reading value on power meter + cable loss
3. Antenna Gain: -1.53dBi

MS852B Plus:

Test Mode	Channel No.	Frequency (MHz)	Peak Power (dBm)	EIRP (dBm)	Peak Power Limit (dBm)	EIRP Limit (dBm)
DH5	00	2402	6.724	5.194	< 30	< 36
DH5	39	2441	6.616	5.086	< 30	< 36
DH5	78	2480	6.698	5.168	< 30	< 36
2DH5	00	2402	6.796	5.266	< 30	< 36
2DH5	39	2441	6.681	5.151	< 30	< 36
2DH5	78	2480	6.741	5.211	< 30	< 36
3DH5	00	2402	7.795	6.265	< 30	< 36
3DH5	39	2441	7.525	5.995	< 30	< 36
3DH5	78	2480	7.483	5.953	< 30	< 36

Note:

1. The peak power of all test modes is less than 21dBm(125mW).
2. Peak Power Output Value =Reading value on power meter + cable loss
3. Antenna Gain: -1.53dBi

MS851B:

Test Mode	Channel No.	Frequency (MHz)	Peak Power (dBm)	EIRP (dBm)	Peak Power Limit (dBm)	EIRP Limit (dBm)
DH5	00	2402	6.744	5.214	< 30	< 36
DH5	39	2441	6.615	5.085	< 30	< 36
DH5	78	2480	6.692	5.162	< 30	< 36
2DH5	00	2402	6.798	5.268	< 30	< 36
2DH5	39	2441	6.690	5.160	< 30	< 36
2DH5	78	2480	6.744	5.214	< 30	< 36
3DH5	00	2402	7.804	6.274	< 30	< 36
3DH5	39	2441	7.534	6.004	< 30	< 36
3DH5	78	2480	7.485	5.955	< 30	< 36

Note:

1. The peak power of all test modes is less than 21dBm(125mW).
2. Peak Power Output Value =Reading value on power meter + cable loss
3. Antenna Gain: -1.53dBi

7.4. Carrier Frequency Separation Measurement

7.4.1. Test Limit

The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.


7.4.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.2

7.4.3. Test Setting

1. Span = wide enough to capture the peaks of two adjacent channels.
2. RBW $\geq$ 1 % of the span
3. VBW $\geq$ RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.4.4. Test Setup

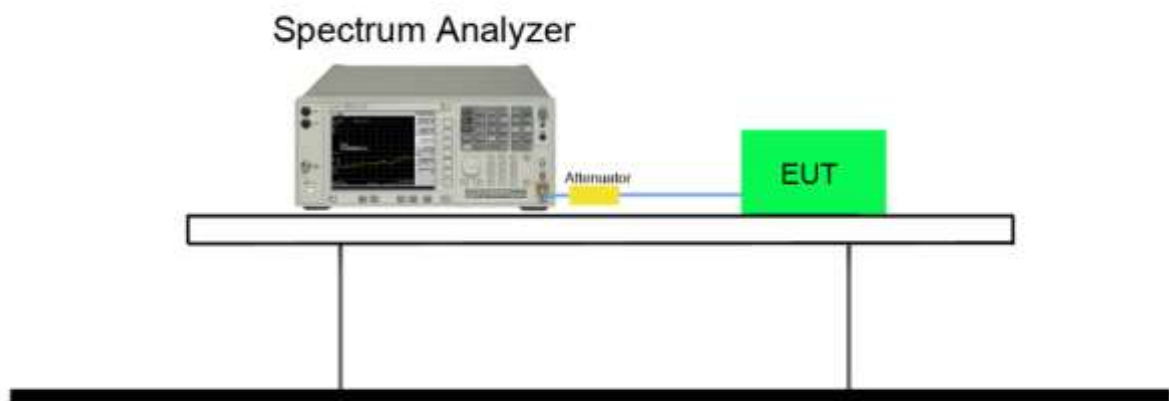


7.4.5. Test Result

Test Mode	Channel No.	Frequency (MHz)	Channel Separation (MHz)	Limit (kHz)	Limit of 2/3*20dB Bandwidth (kHz)	Result
DH5(1M)	00	2402	1.00	25	618.867	Pass
DH5(1M)	39	2441	1.00	25	619.600	Pass
DH5(1M)	78	2480	1.00	25	616.067	Pass
3-DH5(3M)	00	2402	1.00	25	869.333	Pass
3-DH5(3M)	39	2441	1.00	25	866.667	Pass
3-DH5(3M)	78	2480	1.00	25	868.667	Pass

Note:

1. The limit is 25 kHz or 2/3 the value of the 20dB bandwidth of the hopping channel, whichever is greater.
2. The 20dB Bandwidth is refer to section 7.2.

CH00 (2402MHz) DH5(1Mbps)

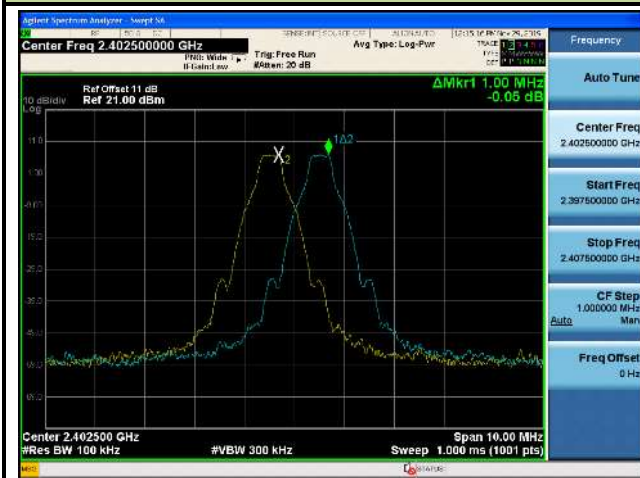

CH00 (2402MHz) 3-DH5(3Mbps)



CH39 (2441MHz) DH5(1Mbps)



CH39 (2480MHz) 3-DH5(3Mbps)



CH78 (2480MHz) DH5(1Mbps)



CH78 (2480MHz) 3-DH5(3Mbps)



7.5. Number of Hopping Channels Measurement

7.5.1. Test Limit

This frequency hopping system must employ a minimum of 15 hopping channels.


7.5.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.3

7.5.3. Test Setting


1. Span = the frequency band of operation.
2. RBW $\geq$ 1 % of the span
3. VBW $\geq$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

7.5.4. Test Setup

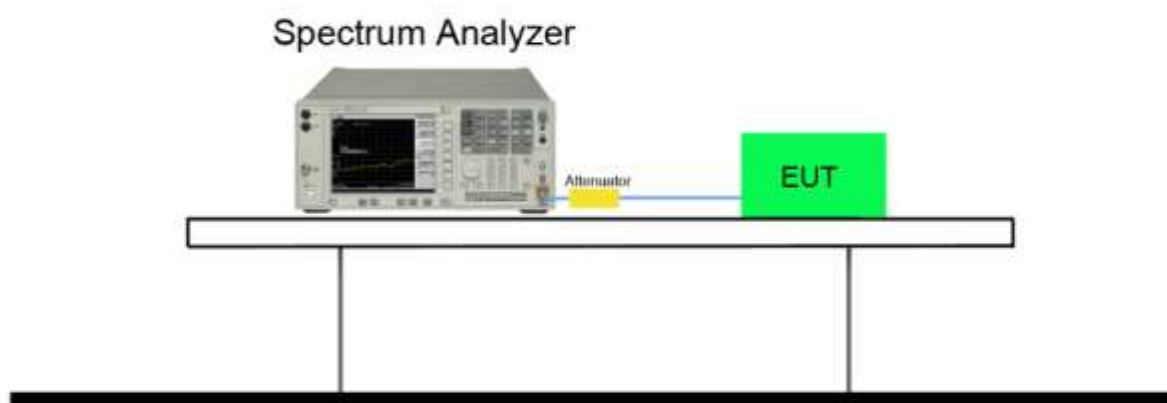

7.5.5. Test Result

Test Mode (Hopping)	Channel Numbers	Frequency (MHz)	Limit (Hopping Channels)	Result
DH5	79	2402~2480	≥ 15	Pass
3DH5	79	2402~2480	≥ 15	Pass

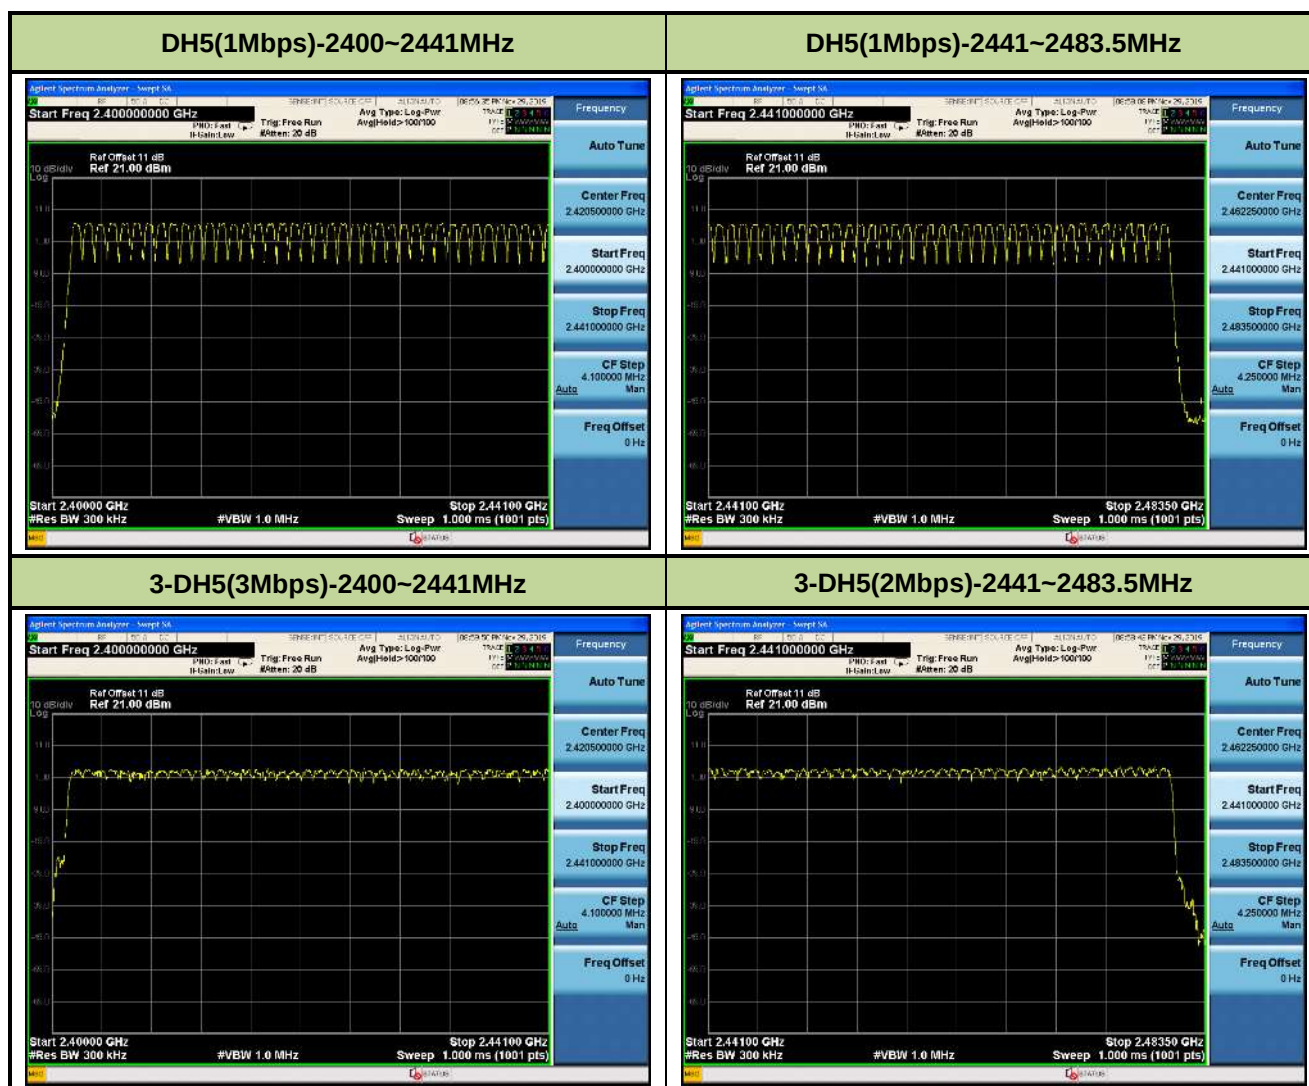

7.6. Time of Occupancy Measurement

7.6.1. Test Limit

The maximum permissible time of occupancy is 400ms within a period of 400ms multiplied by the number of hopping channels employed.

7.6.2. Test Procedure Used


ANSI C63.10-2013 - Section 7.8.4

7.6.3. Test Settling

1. Span = zero span, centered on a hopping channel.
2. RBW = 1MHz
3. VBW $\geq$ RBW
4. Sweep time = as necessary to capture the entire dwell time per hopping channel
5. Detector = Peak
6. Trace mode = max hold

If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (data rate, modulation format, etc.), repeat this test for each variation. An oscilloscope may be used instead of a spectrum analyzer. The EUT shall show compliance with the appropriate regulatory limit for the number of hopping channels. A plot of the data shall be included in the test report.

7.6.4. Test Setup

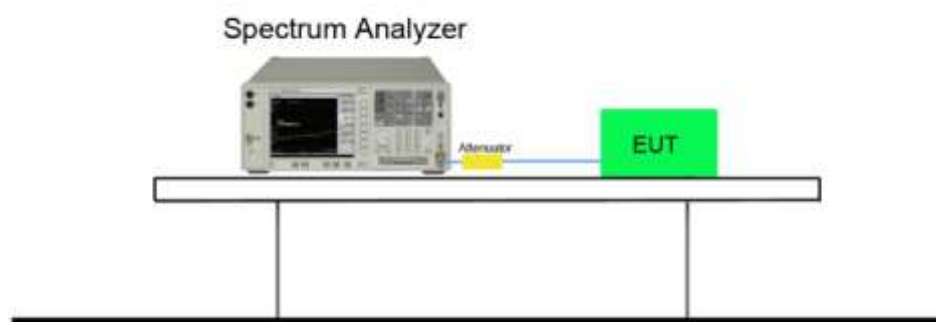


7.6.5. Test Result

Test Mode	Frequency (MHz)	Time of Occupancy (ms)	Hopping of Numbers	Sweep time (ms)	Duty cycle	Dwell Time (Sec)	Limit (Sec)	Result
DH5(1Mbps)	2402	2.89	13	50	0.75	0.30	0.4	Pass
	2441	2.89	13	50	0.75	0.30	0.4	Pass
	2480	2.89	13	50	0.75	0.30	0.4	Pass
3-DH5(3Mbps)	2402	2.89	13	50	0.75	0.30	0.4	Pass
	2441	2.89	13	50	0.75	0.30	0.4	Pass
	2480	2.89	13	50	0.75	0.30	0.4	Pass


Note:

1. Duty cycle = ((Time slot length (ms)*Hopping of Number) / Sweep time (ms)) °
2. Dwell time = ((Duty cycle *(Time Period <0.4*79>)) / (Total Hopping of Number<79>)) °
3. The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.


CH00 (2402MHz) DH5(1 Mbps)- Duty Cycle

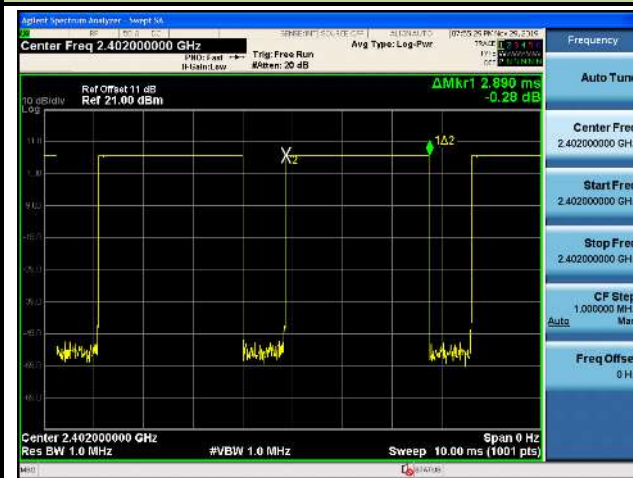


CH00 (2402MHz) DH5(1 Mbps)- Dwell time

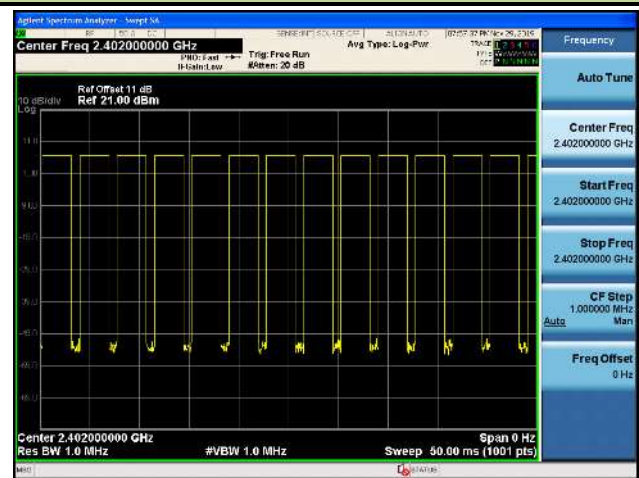

CH39 (2441MHz) DH5(1 Mbps)- Duty Cycle

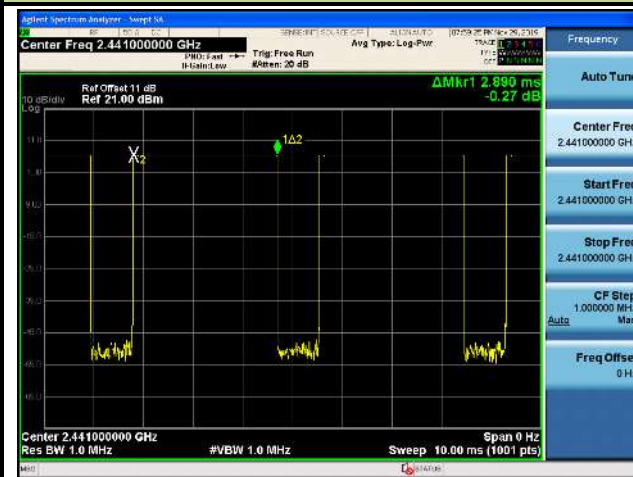


CH39 (2441MHz) DH5(1 Mbps)- Dwell time

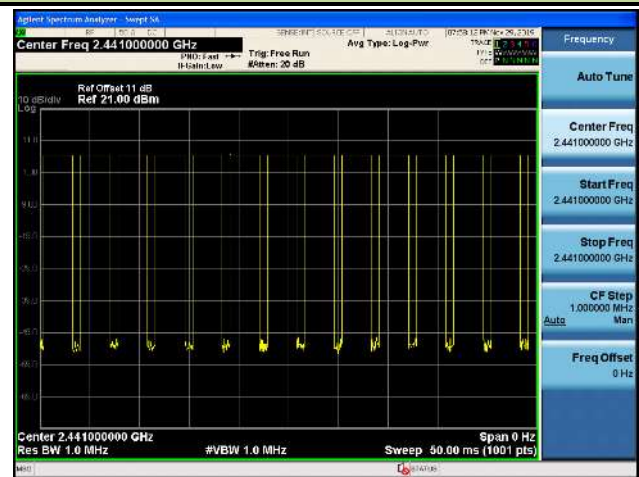


CH78 (2480MHz) DH5(1 Mbps)- Duty Cycle




CH78 (2480MHz) DH5(1 Mbps)- Dwell time

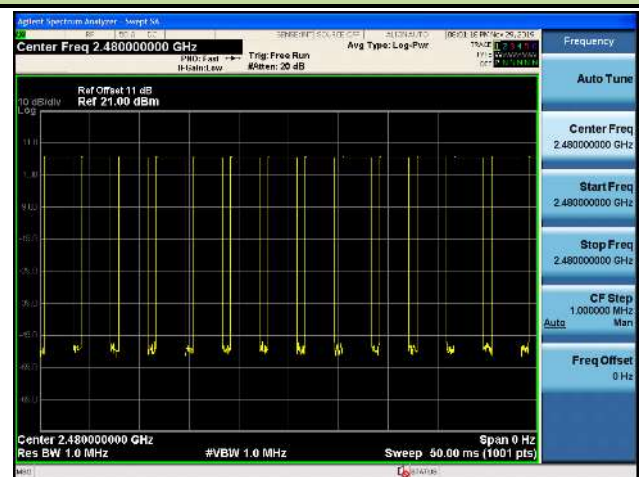


CH00 (2402MHz) 3DH5(1 Mbps)- Duty Cycle

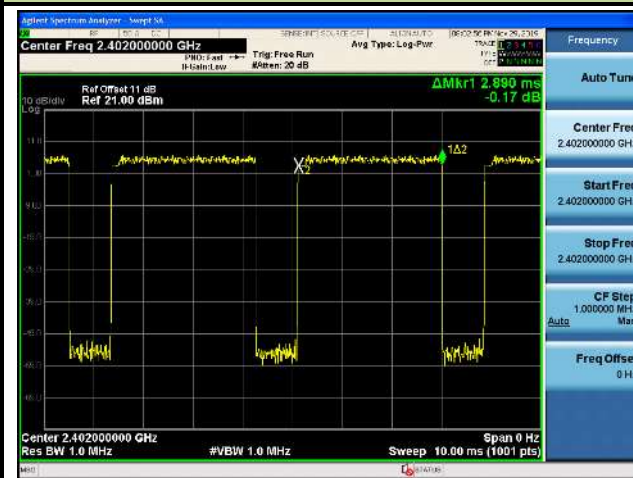


CH00 (2402MHz) 3DH5(1 Mbps)- Dwell time

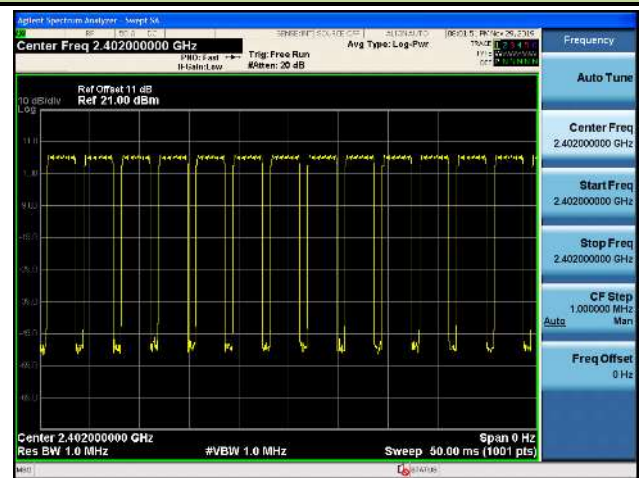

CH39 (2441MHz) 3DH5(1 Mbps)- Duty Cycle

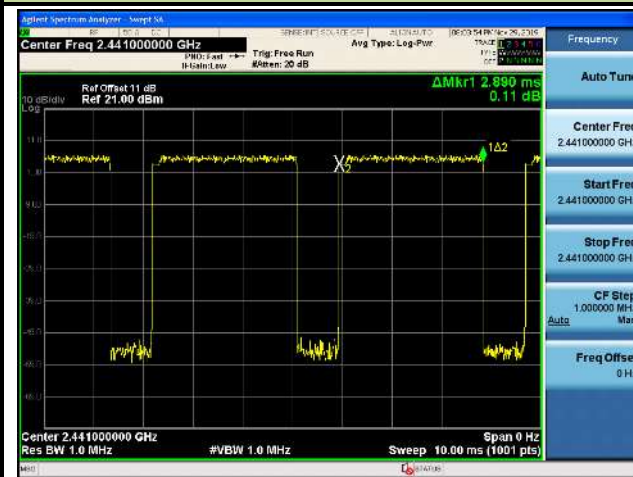


CH39 (2441MHz) 3DH5(1 Mbps)- Dwell time

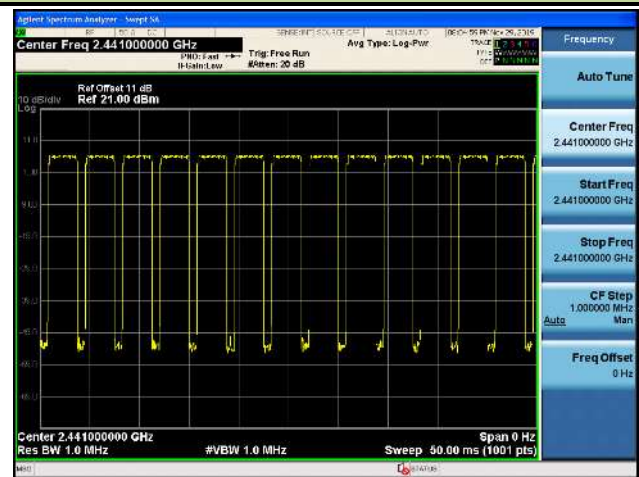

CH78 (2480MHz) 3DH5(1 Mbps)- Duty Cycle



CH78 (2480MHz) 3DH5(1 Mbps)- Dwell time

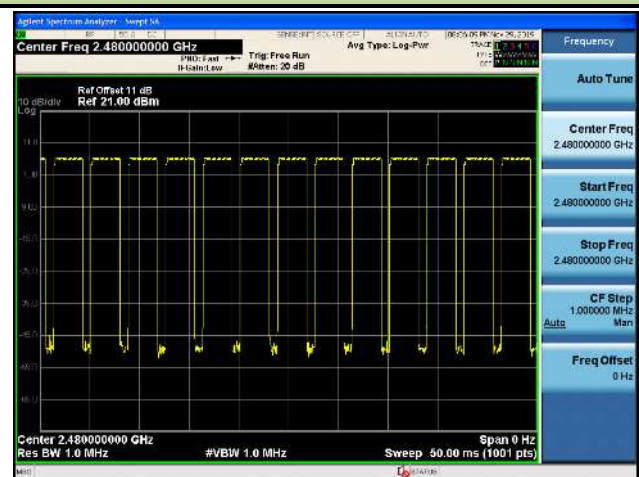

7.7. Out-of-Band Spurious Emissions Emissions Measurement

7.7.1. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

7.7.2. Test Procedure Used


ANSI C63.10-2013 - Section 7.8.8

7.7.3. Test Setting

1. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
2. RBW = 100 KHz
3. VBW $\geq$ RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.


7.7.4. Test Setup

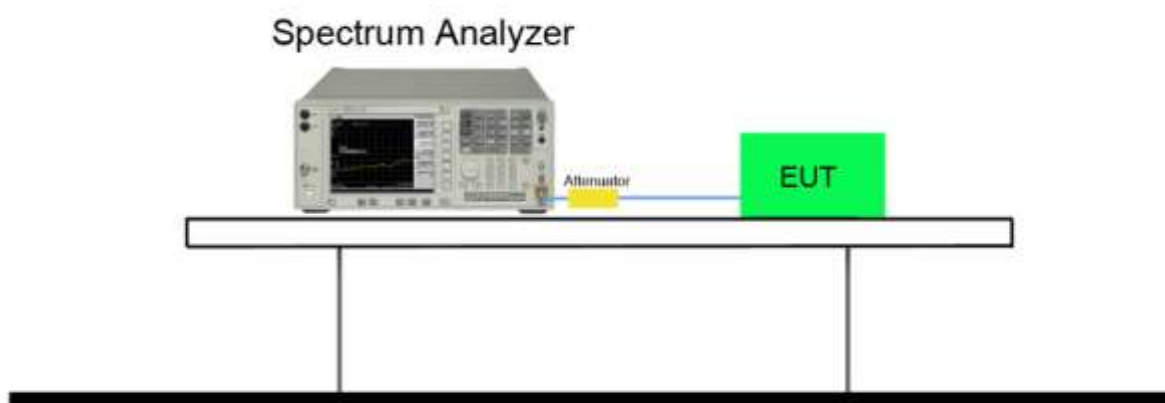


7.7.5. Test Result

Test Mode	Channel No.	Frequency (MHz)	Limit (MHz)	Result
DH5	00	2402	20dBc	Pass
DH5	39	2441	20dBc	Pass
DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	39	2441	20dBc	Pass
3DH5	78	2480	20dBc	Pass


CH00 (2402MHz) DH5(1Mbps)

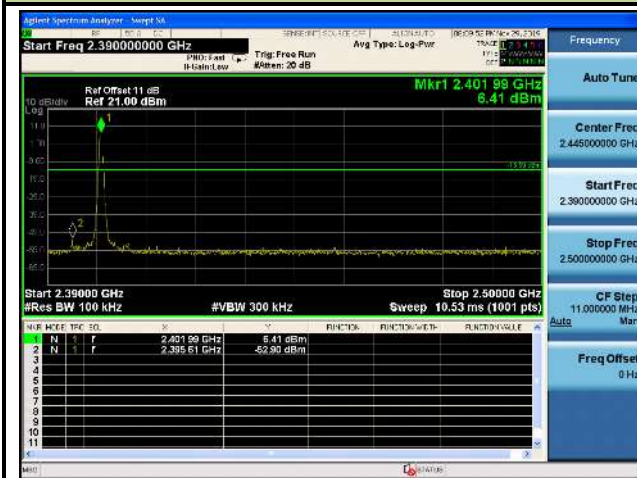


CH00 (2402MHz) DH5(1Mbps)

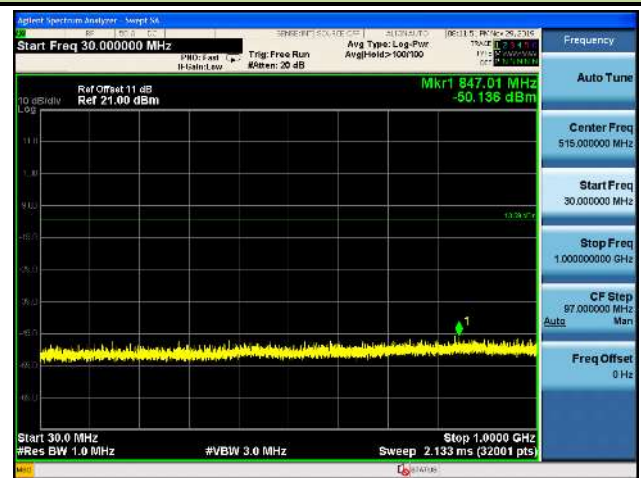


CH00 (2402MHz) DH5(1Mbps)

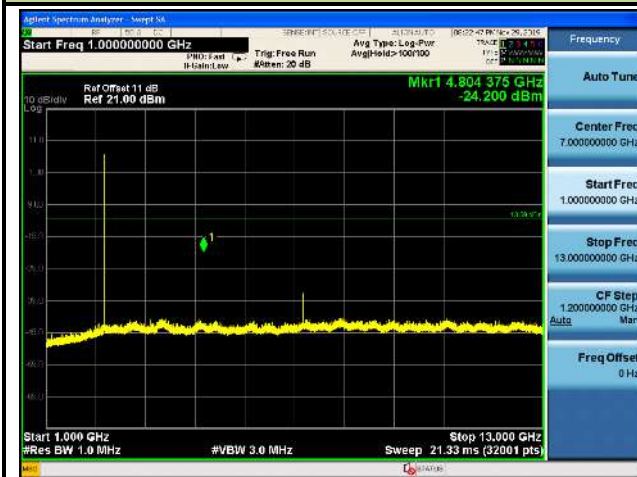


CH00 (2402MHz) DH5(1Mbps)

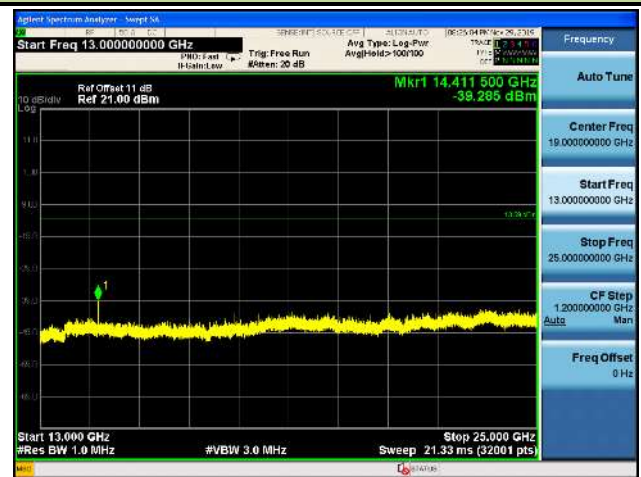


CH39 (2441MHz) DH5(1Mbps)

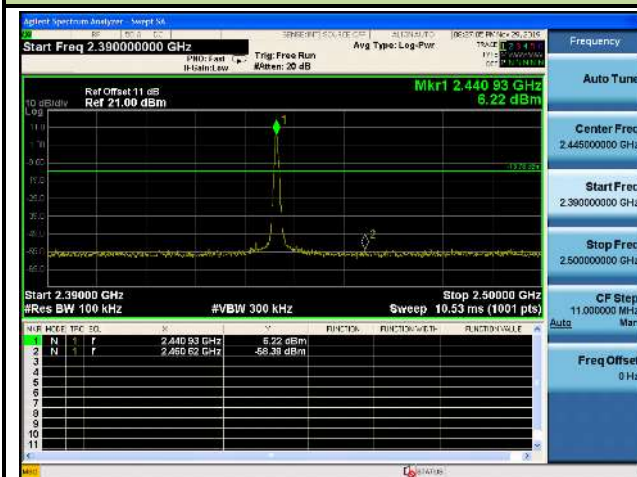


CH39 (2441MHz) DH5(1Mbps)

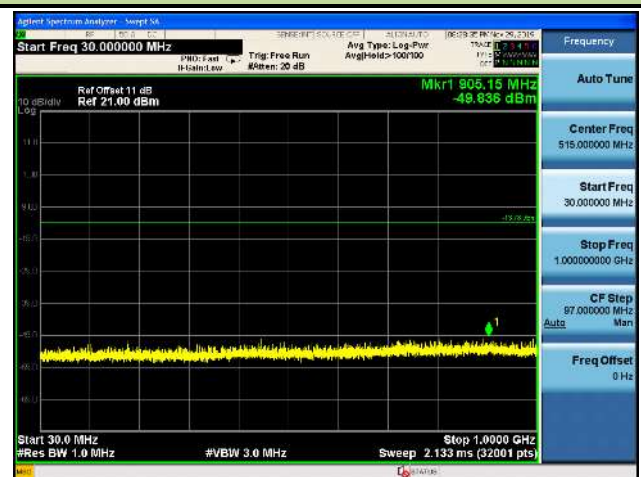


CH39 (2441MHz) DH5(1Mbps)

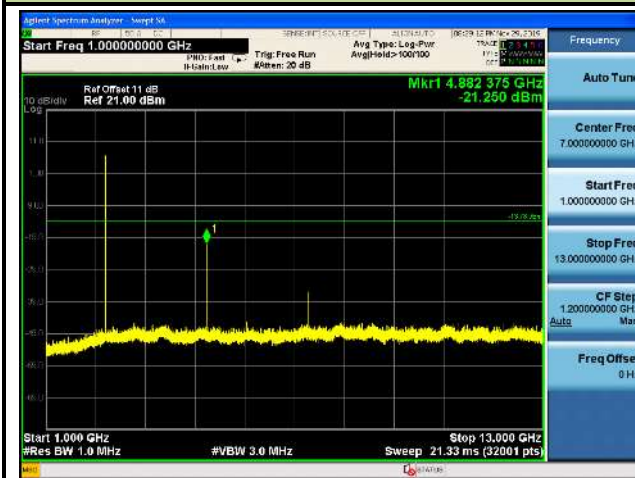


CH39 (2441MHz) DH5(1Mbps)

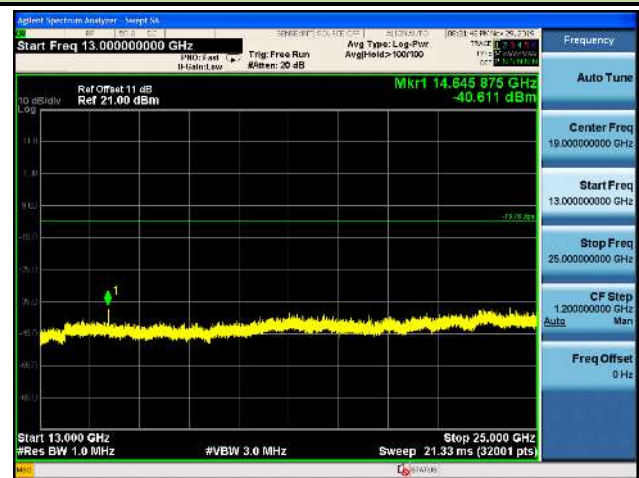


CH78 (2480MHz) DH5(1Mbps)

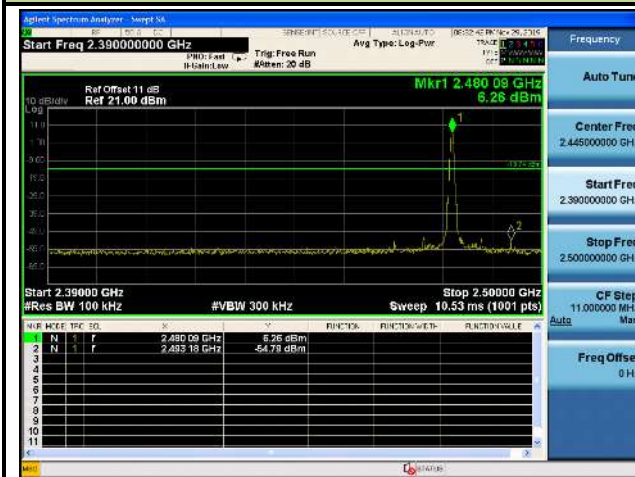

CH78 (2480MHz) DH5(1Mbps)

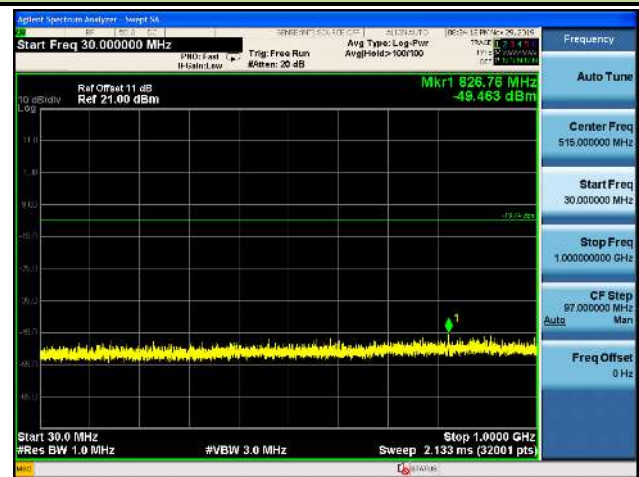


CH78 (2480MHz) DH5(1Mbps)

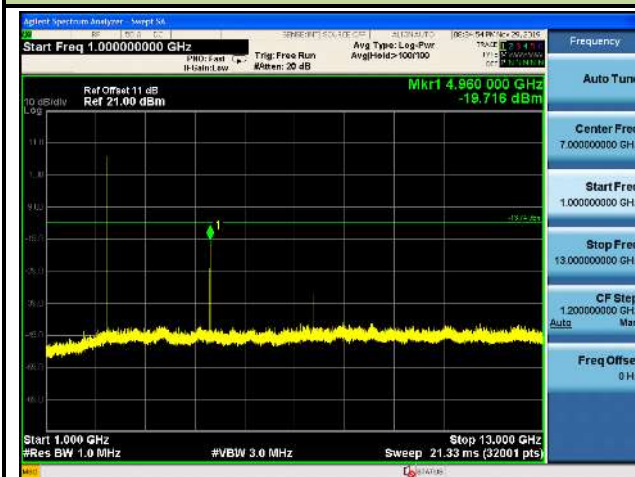


CH78 (2480MHz) DH5(1Mbps)




CH00 (2402MHz) 3-DH5(3Mbps)

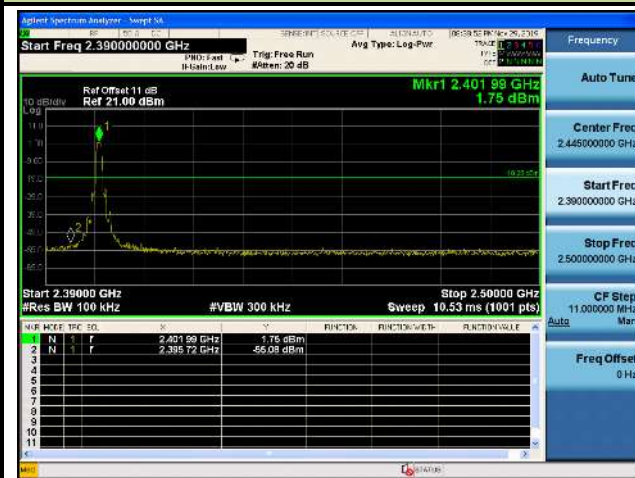

CH00 (2402MHz) 3-DH5(3Mbps)

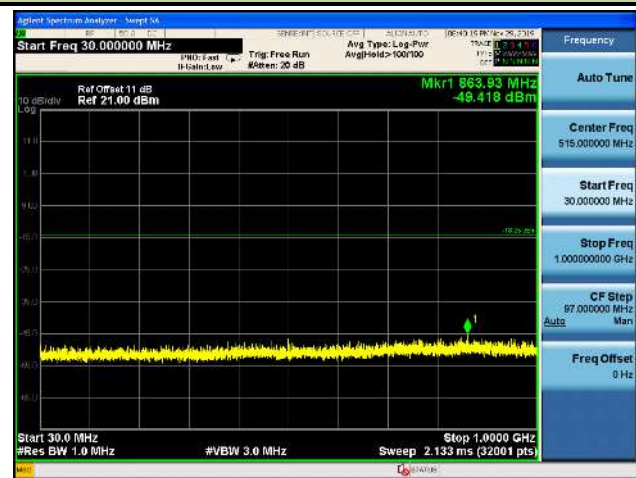


CH00 (2402MHz) 3-DH5(3Mbps)

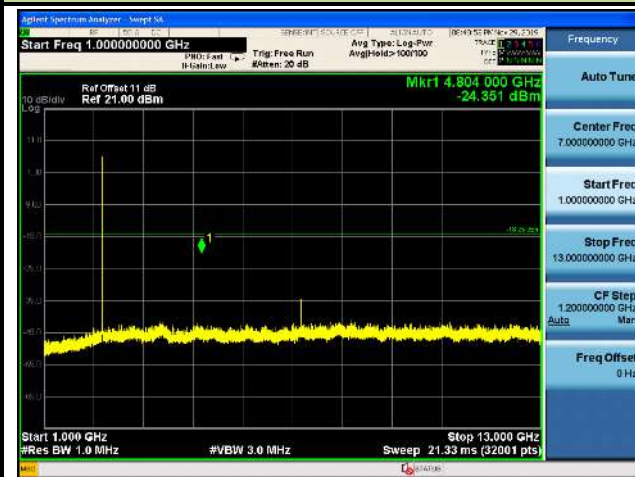


CH00 (2402MHz) 3-DH5(3Mbps)




CH39 (2441MHz) 3-DH5(3Mbps)

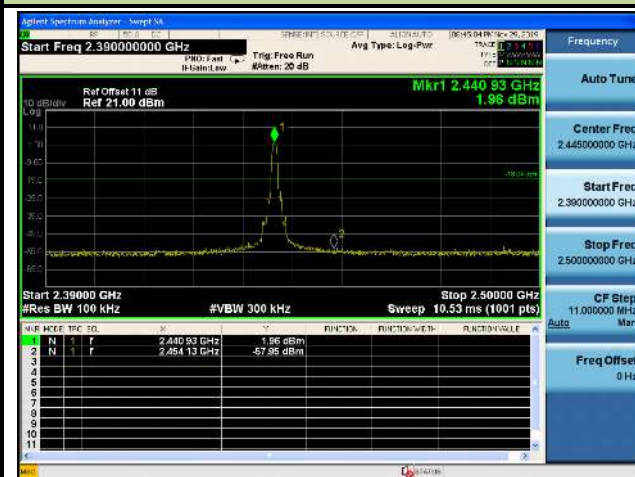

CH39 (2441MHz) 3-DH5(3Mbps)

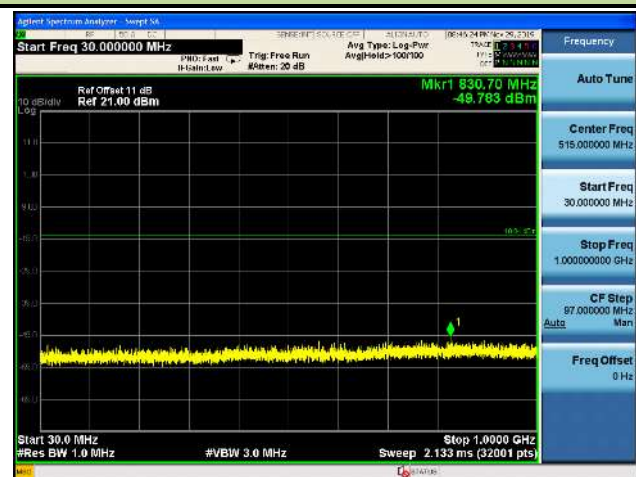


CH39 (2441MHz) 3-DH5(3Mbps)

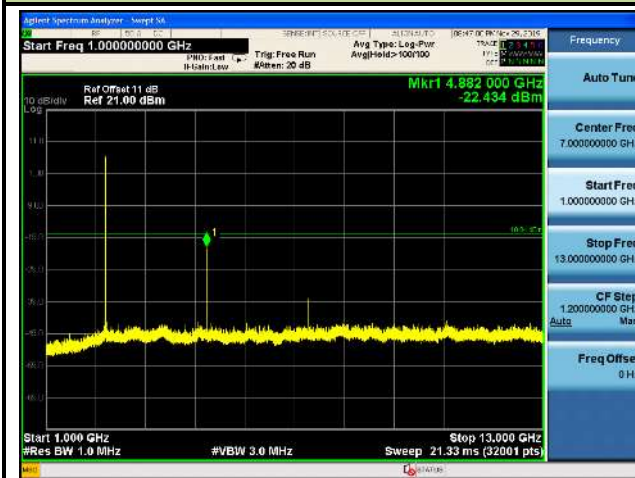


CH39 (2441MHz) 3-DH5(3Mbps)




CH78 (2480MHz) 3-DH5(3Mbps)

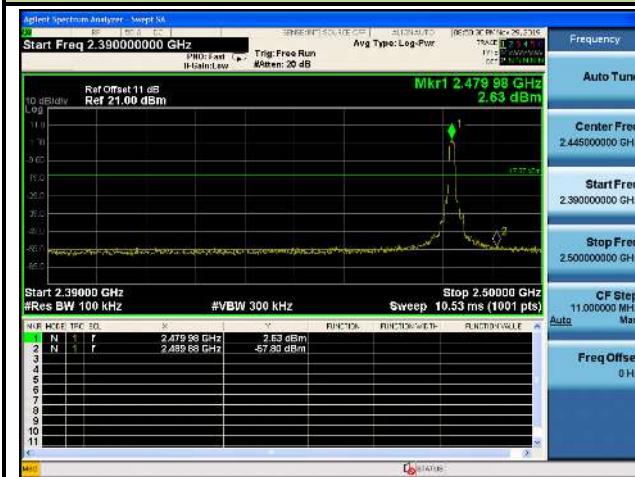

CH78 (2480MHz) 3-DH5(3Mbps)

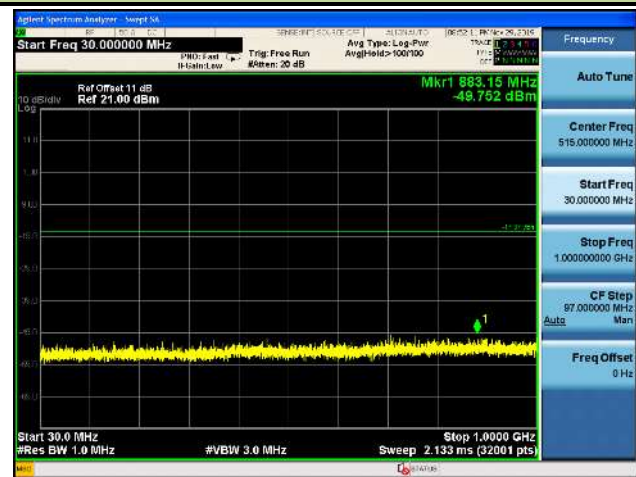

CH78 (2480MHz) 3-DH5(3Mbps)

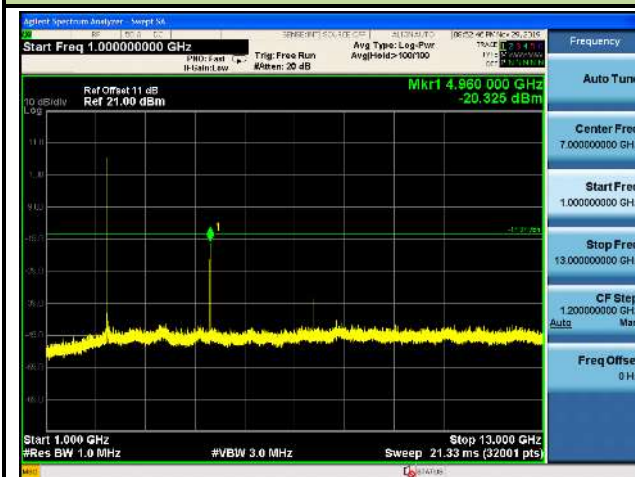


CH78 (2480MHz) 3-DH5(3Mbps)




Band Edge With Hopping On

CH00 (2402MHz) DH5(1Mbps)

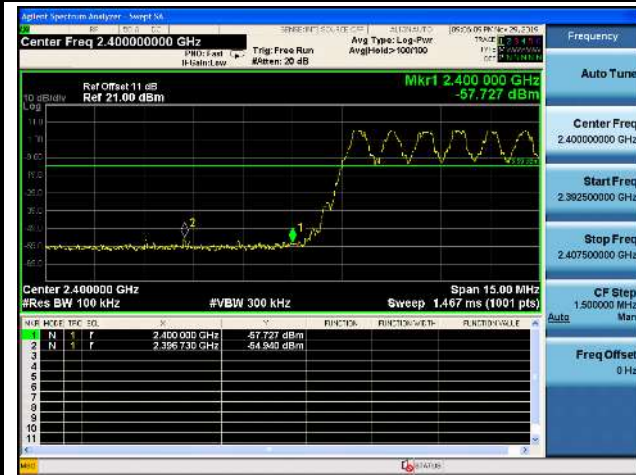

CH78 (2480MHz) DH5(1Mbps)

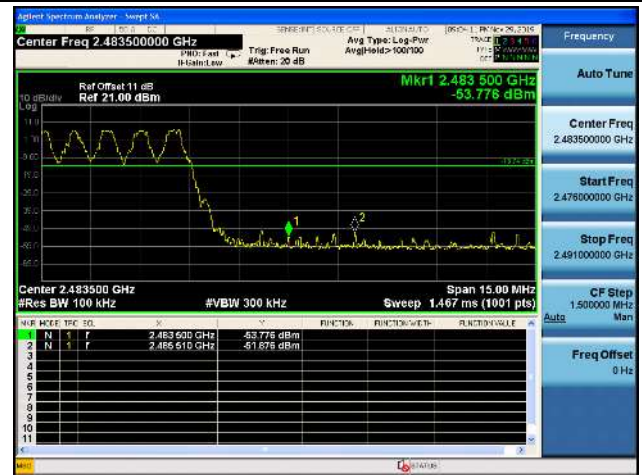

CH00 (2402MHz) 3-DH5(3Mbps)



CH78 (2480MHz) 3-DH5(3Mbps)



7.8. Radiated Spurious Emission Measurement

7.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

7.8.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.12.2

7.8.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3 * RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.8.4. Test Setup


9kHz ~ 30MHz Test Setup:

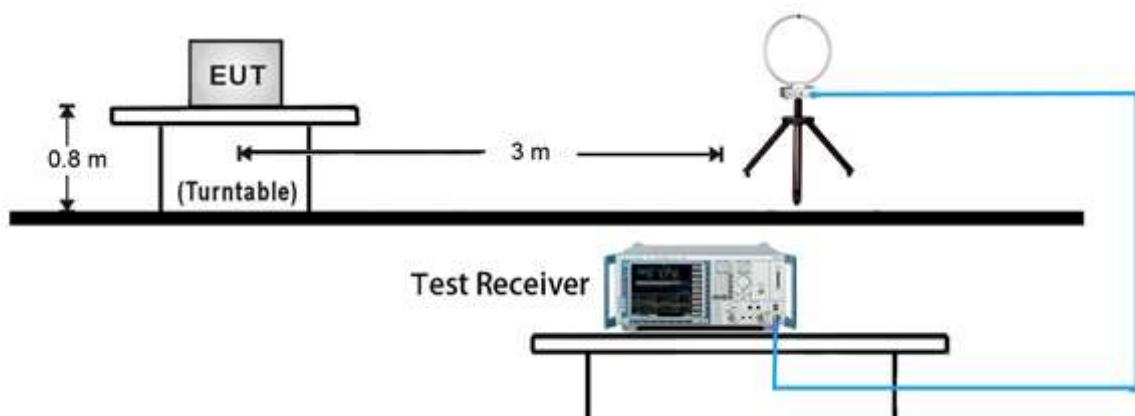


30MHz ~ 1GHz Test Setup:

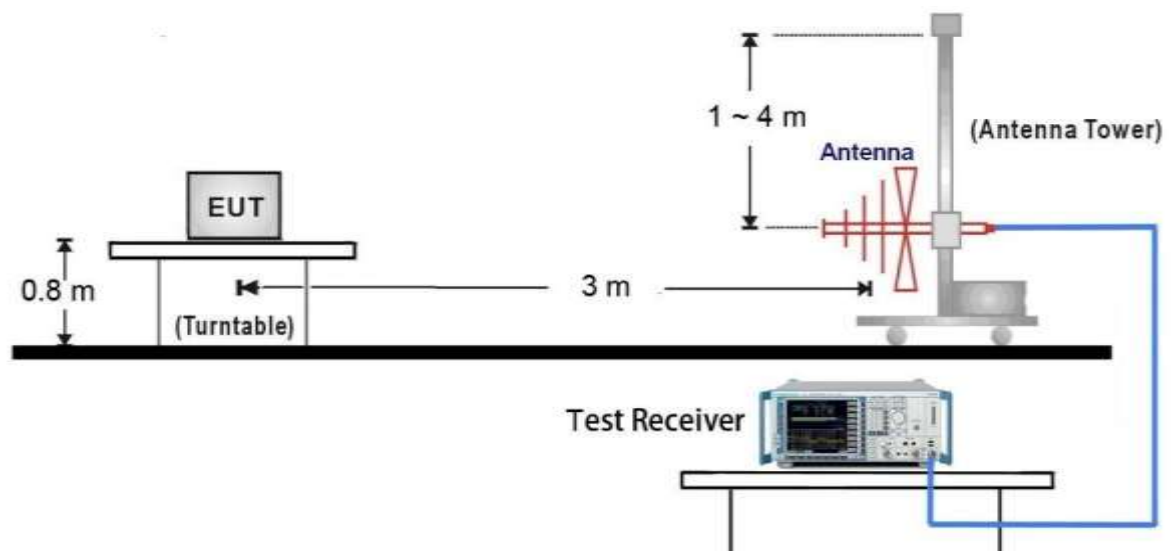

1GHz ~ 18GHz Test Setup:

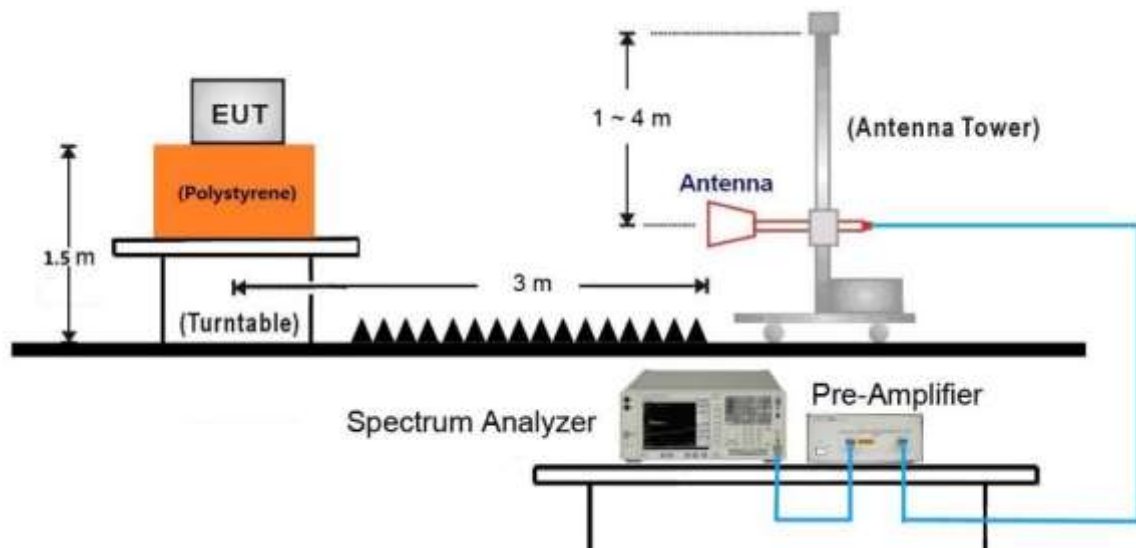


18GHz ~40GHz Test Setup:

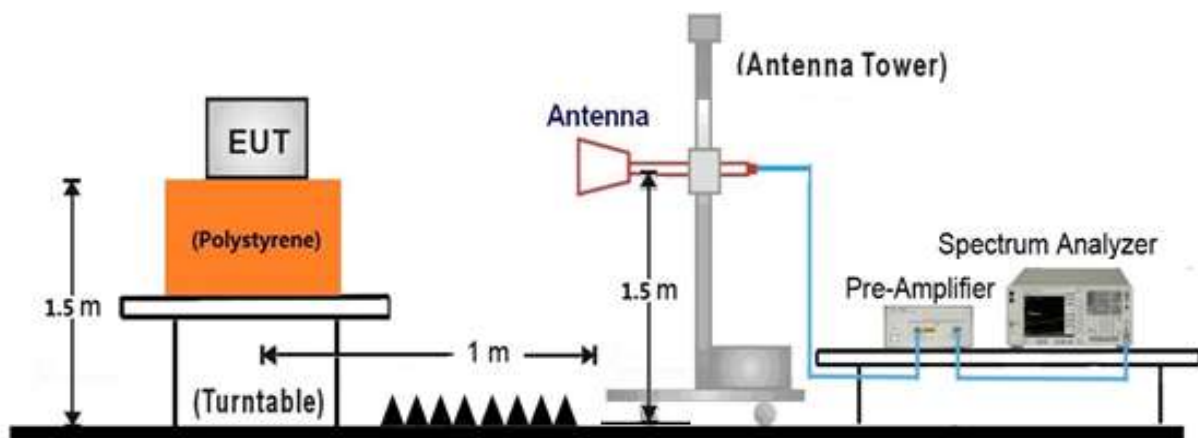

7.8.5. Test Result

EUT	MS852B	Date of Test	2019-11-02
Factor	VULB 9162	Temp. / Humidity	25°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_DH5 CH39	Test Voltage	AC 120V/60Hz

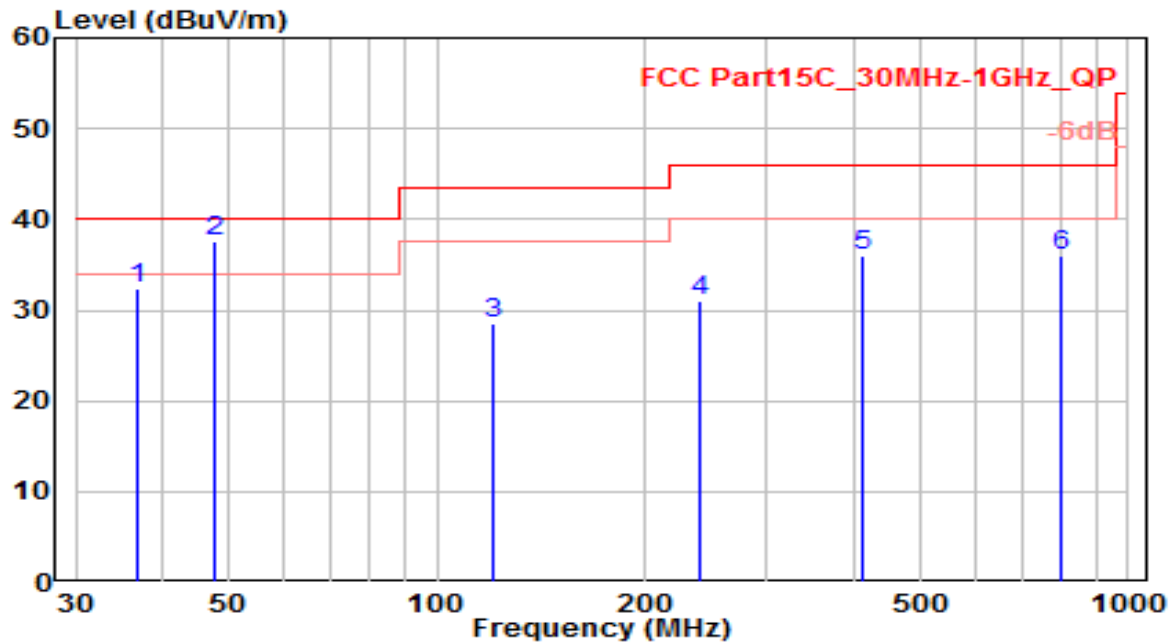


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	36.990	12.65	19.67	32.32	-7.68	40.00	125	125	QP
2	* 47.460	15.95	21.53	37.48	-2.52	40.00	105	-35	QP
3	120.150	11.68	16.93	28.61	-14.89	43.50	170	350	QP
4	240.650	10.89	20.22	31.11	-14.89	46.00	210	200	QP
5	412.520	11.62	24.34	35.96	-10.04	46.00	270	275	QP
6	799.620	5.60	30.30	35.90	-10.10	46.00	330	290	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS852B	Date of Test	2019-11-02
Factor	VULB 9162	Temp. / Humidity	25°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_DH5 CH39	Test Voltage	AC 120V/60Hz

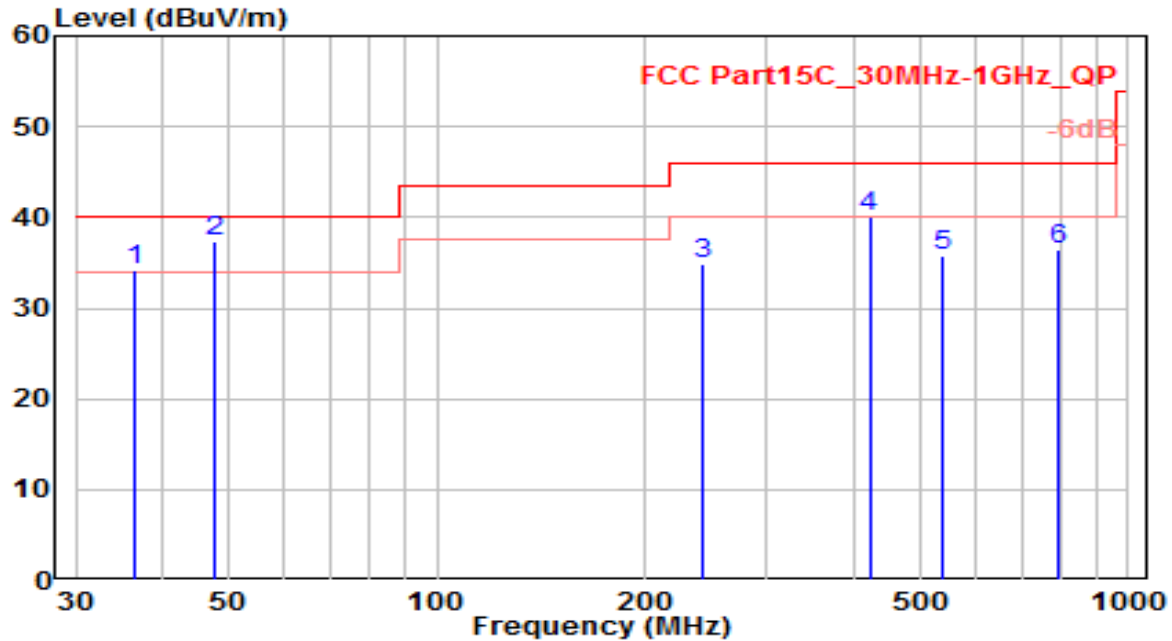


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	36.650	14.66	19.56	34.22	-5.78	40.00	115	300	QP
2	* 47.460	15.90	21.53	37.43	-2.57	40.00	120	-40	QP
3	242.680	14.62	20.29	34.91	-11.09	46.00	150	220	QP
4	422.310	15.66	24.49	40.15	-5.85	46.00	155	310	QP
5	538.110	9.40	26.42	35.82	-10.18	46.00	125	160	QP
6	795.620	6.20	30.26	36.46	-9.54	46.00	100	-30	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS852B Plus	Date of Test	2020-01-03
Factor	VULB 9162	Temp. / Humidity	25°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_DH5 CH39	Test Voltage	AC 120V/60Hz

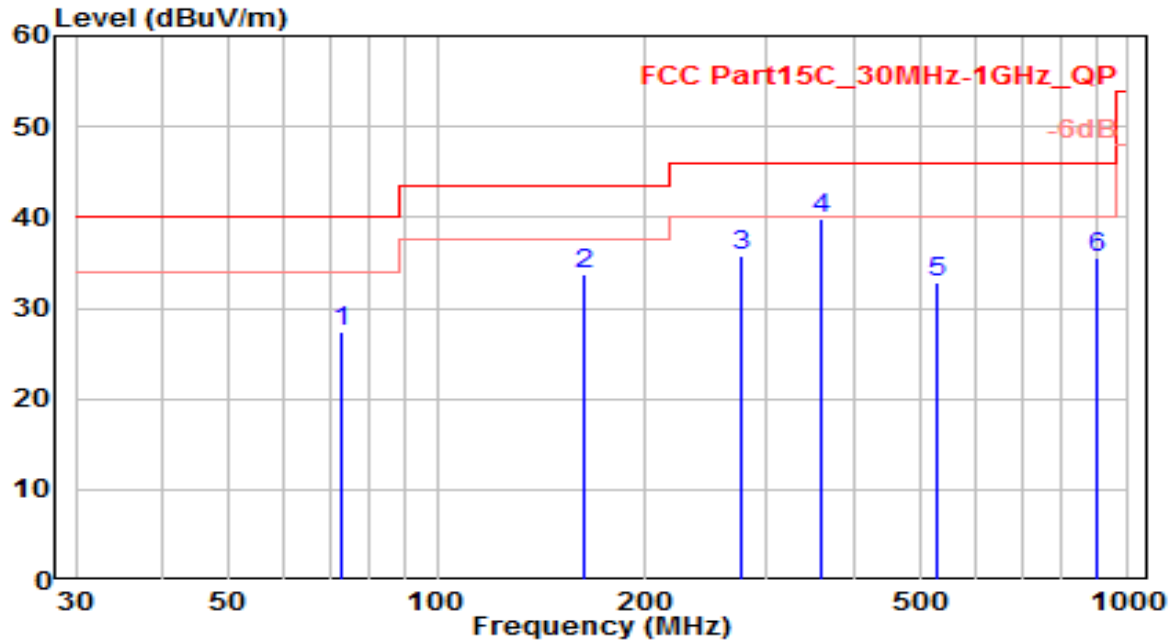


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	72.680	11.60	15.82	27.42	-12.58	40.00	100	220	QP
2	163.860	17.60	16.21	33.81	-9.69	43.50	100	0	QP
3	276.380	14.80	20.92	35.72	-10.28	46.00	100	15	QP
4	* 359.800	16.20	23.57	39.77	-6.23	46.00	100	115	QP
5	527.610	6.47	26.26	32.73	-13.27	46.00	100	120	QP
6	897.180	4.04	31.46	35.50	-10.50	46.00	200	225	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS852B Plus	Date of Test	2020-01-03
Factor	VULB 9162	Temp. / Humidity	25°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_DH5 CH39	Test Voltage	AC 120V/60Hz

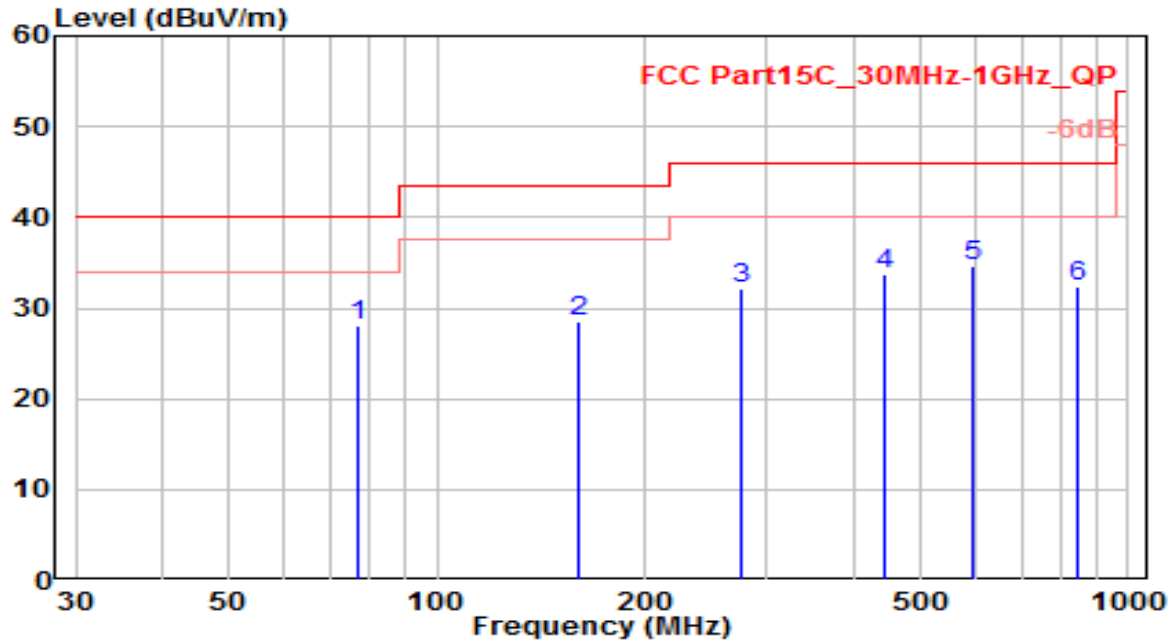


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	76.560	13.29	14.88	28.18	-11.82	40.00	100	20	QP
2	159.980	12.49	16.12	28.61	-14.89	43.50	120	100	QP
3	275.410	11.16	20.88	32.04	-13.96	46.00	200	100	QP
4	443.220	8.84	24.79	33.63	-12.37	46.00	100	150	QP
5	* 597.450	7.18	27.45	34.63	-11.37	46.00	100	185	QP
6	841.890	1.21	31.13	32.33	-13.67	46.00	100	65	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS851B	Date of Test	2020-01-03
Factor	VULB 9162	Temp. / Humidity	25°C / 59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_DH5 CH39	Test Voltage	AC 120V/60Hz

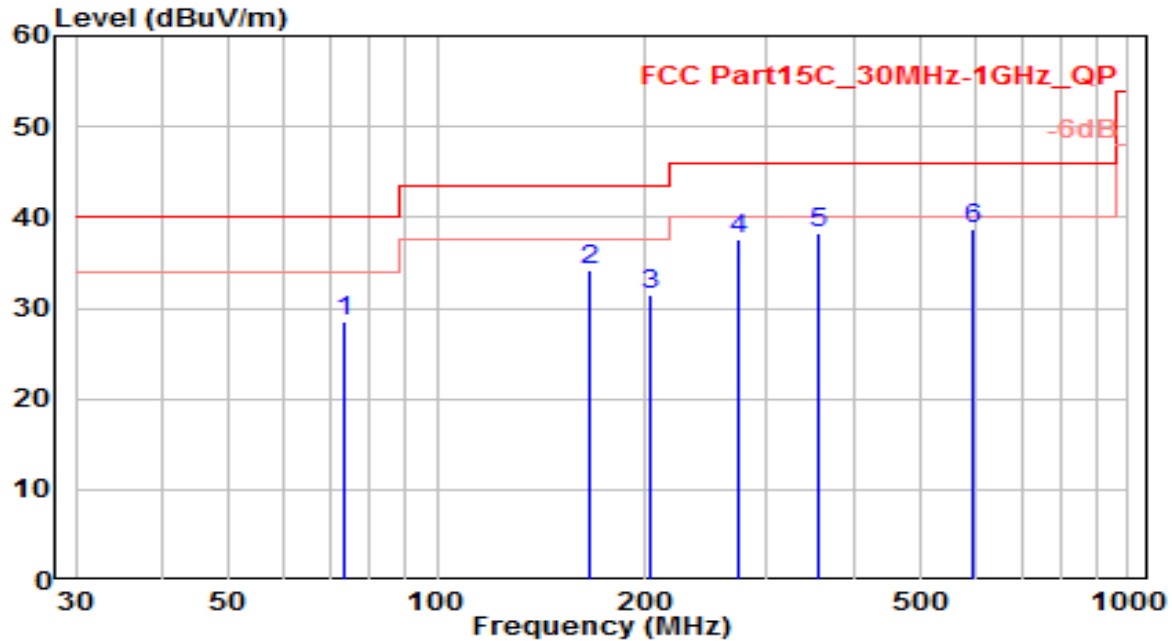


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	73.650	13.02	15.59	28.60	-11.40	40.00	100	80	QP
2	165.800	18.01	16.25	34.27	-9.23	43.50	100	115	QP
3	203.630	12.66	18.82	31.48	-12.02	43.50	105	65	QP
4	272.500	16.78	20.79	37.57	-8.43	46.00	100	45	QP
5	354.950	14.70	23.50	38.20	-7.80	46.00	200	15	QP
6	* 597.450	11.34	27.45	38.79	-7.21	46.00	100	65	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS851B	Date of Test	2020-01-03
Factor	VULB 9162	Temp. / Humidity	25°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_DH5 CH39	Test Voltage	AC 120V/60Hz

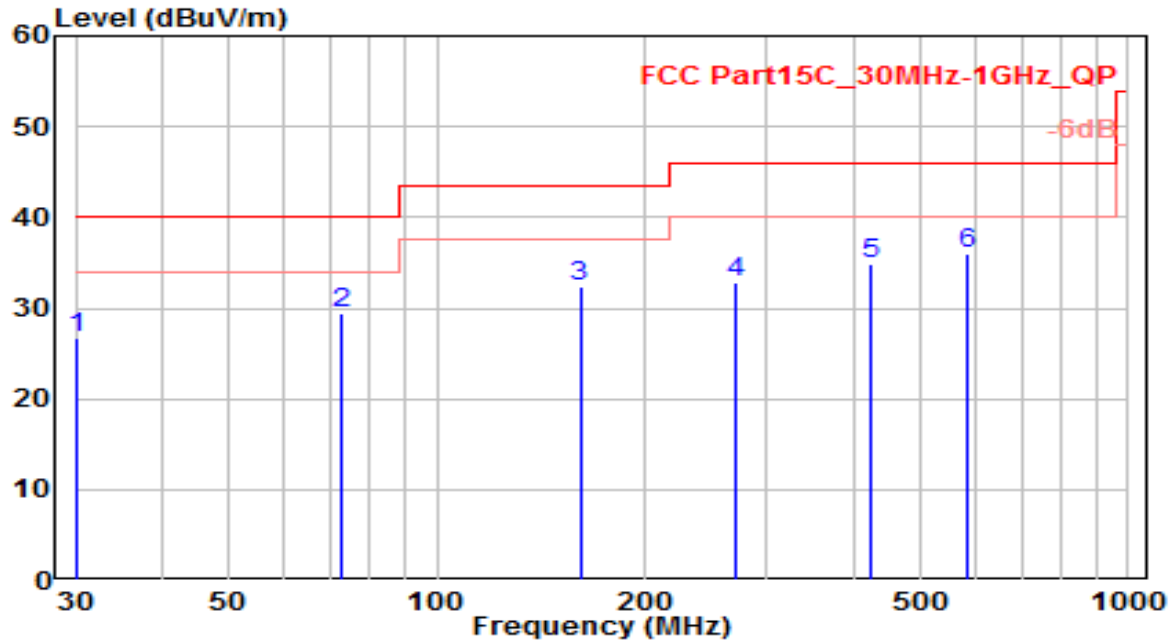


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	30.000	8.74	18.00	26.74	-13.26	40.00	100	300	QP
2	72.680	13.71	15.82	29.53	-10.47	40.00	100	65	QP
3	160.950	16.34	16.14	32.49	-11.01	43.50	100	255	QP
4	271.530	11.99	20.75	32.75	-13.25	46.00	100	400	QP
5	425.760	10.34	24.54	34.88	-11.12	46.00	100	30	QP
6	* 586.780	8.68	27.26	35.95	-10.05	46.00	100	30	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS852B	Date of Test	2019-10-31
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_DH5 CH0	Test Voltage	AC 120V/60Hz

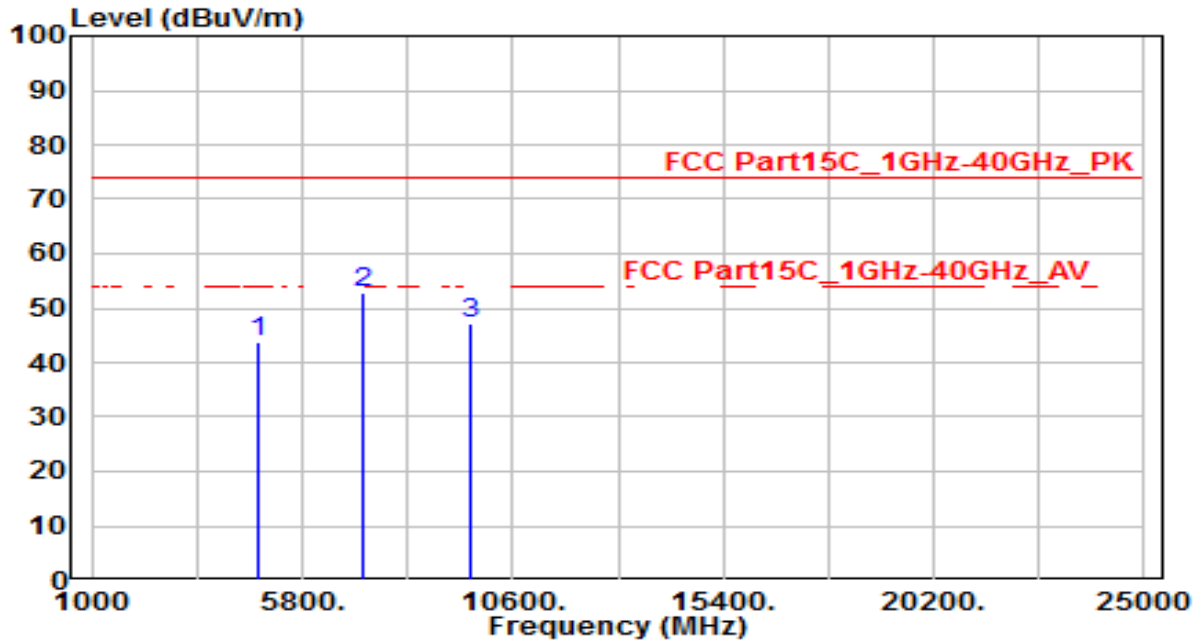


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	40.73	3.16	43.89	-30.11	74.00	150	400	Peak
2	* 7206.000	41.81	11.06	52.87	-21.13	74.00	150	400	Peak
3	9608.000	33.26	13.97	47.23	-26.77	74.00	150	400	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS852B	Date of Test	2019-10-31
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_DH5 CH0	Test Voltage	AC 120V/60Hz

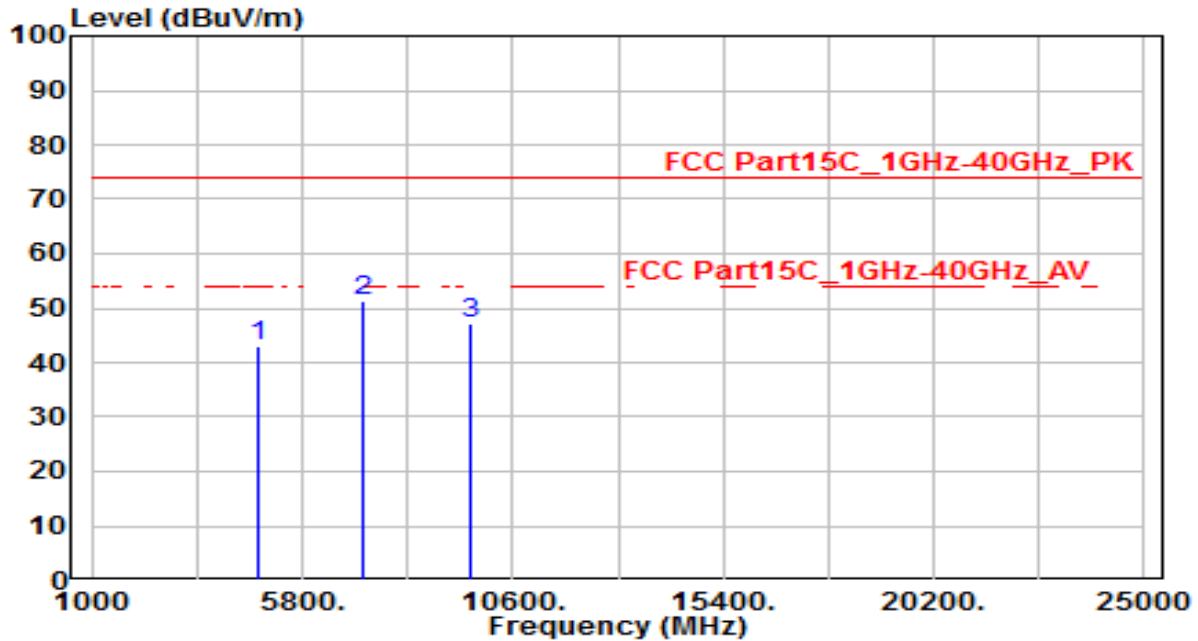


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	39.77	3.16	42.93	-31.07	74.00	150	400	Peak
2	* 7206.000	40.42	11.06	51.48	-22.52	74.00	150	400	Peak
3	9608.000	33.24	13.97	47.21	-26.79	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS852B	Date of Test	2019-10-31
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_DH5 CH39	Test Voltage	AC 120V/60Hz

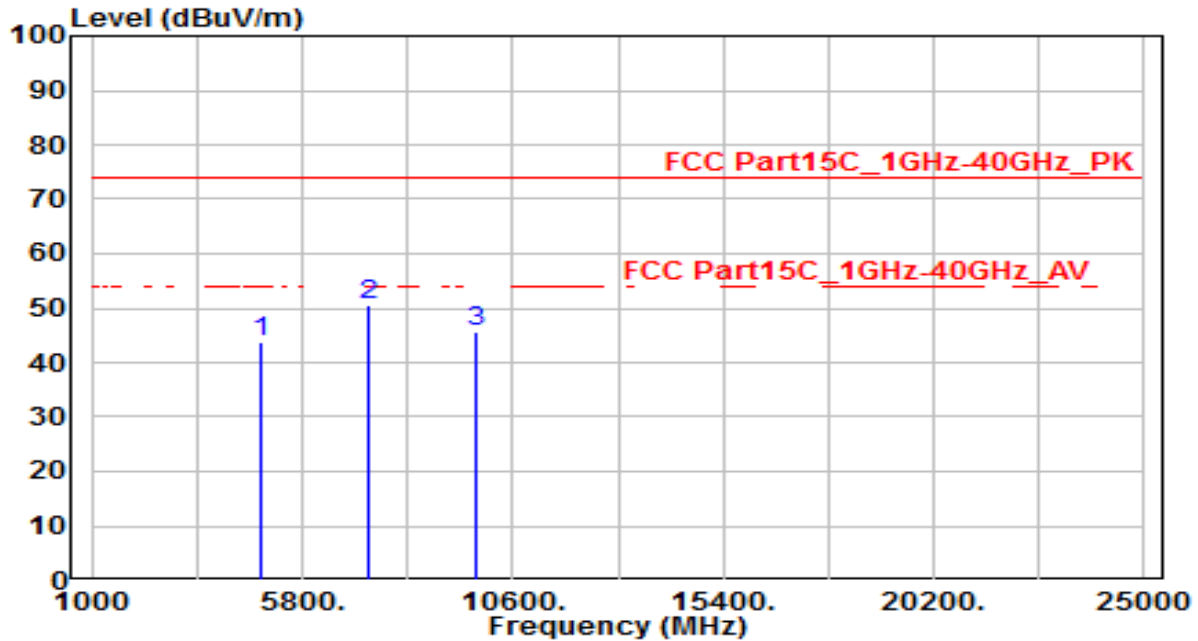


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4882.000	40.42	3.31	43.73	-30.27	74.00	150	400	Peak
2	* 7323.000	39.15	11.32	50.47	-23.53	74.00	150	400	Peak
3	9764.000	31.22	14.49	45.71	-28.29	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS852B	Date of Test	2019-10-31
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C / 59%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_DH5 CH39	Test Voltage	AC 120V/60Hz

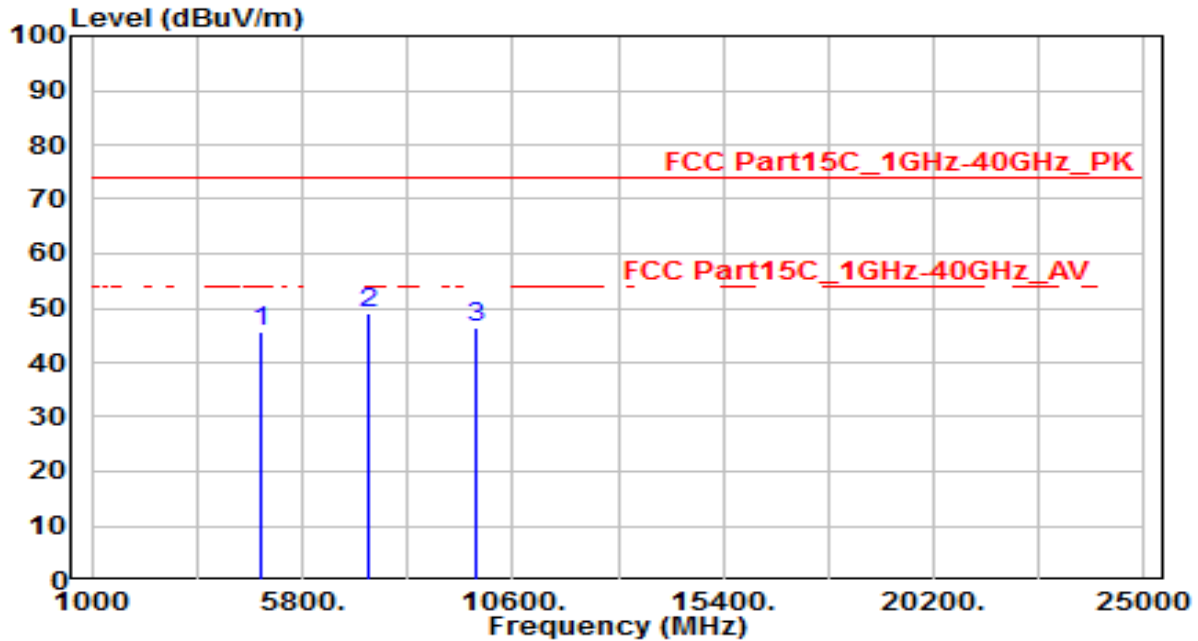


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4882.000	42.26	3.31	45.57	-28.43	74.00	150	400	Peak
2	* 7323.000	37.91	11.32	49.23	-24.77	74.00	150	400	Peak
3	9764.000	32.03	14.49	46.52	-27.48	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS852B	Date of Test	2019-10-31
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_DH5 CH78	Test Voltage	AC 120V/60Hz

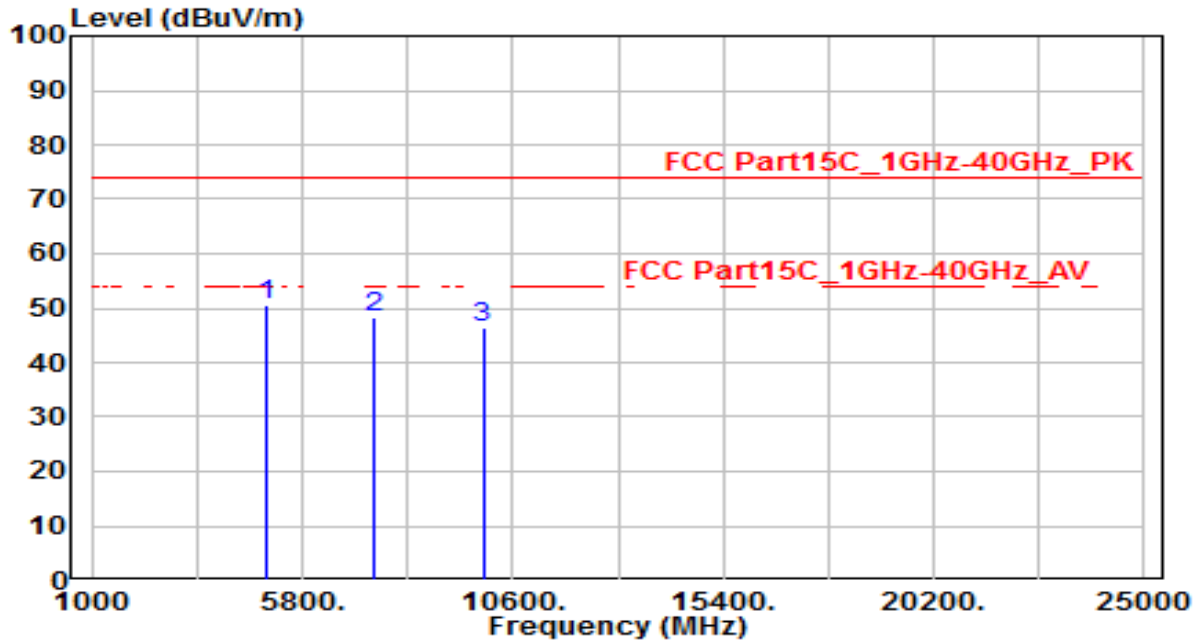


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4960.000	47.10	3.47	50.57	-23.43	74.00	150	400	Peak
2		7440.000	36.64	11.58	48.22	-25.78	74.00	150	400	Peak
3		9920.000	31.55	15.00	46.55	-27.45	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS852B	Date of Test	2019-10-31
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_DH5 CH78	Test Voltage	AC 120V/60Hz

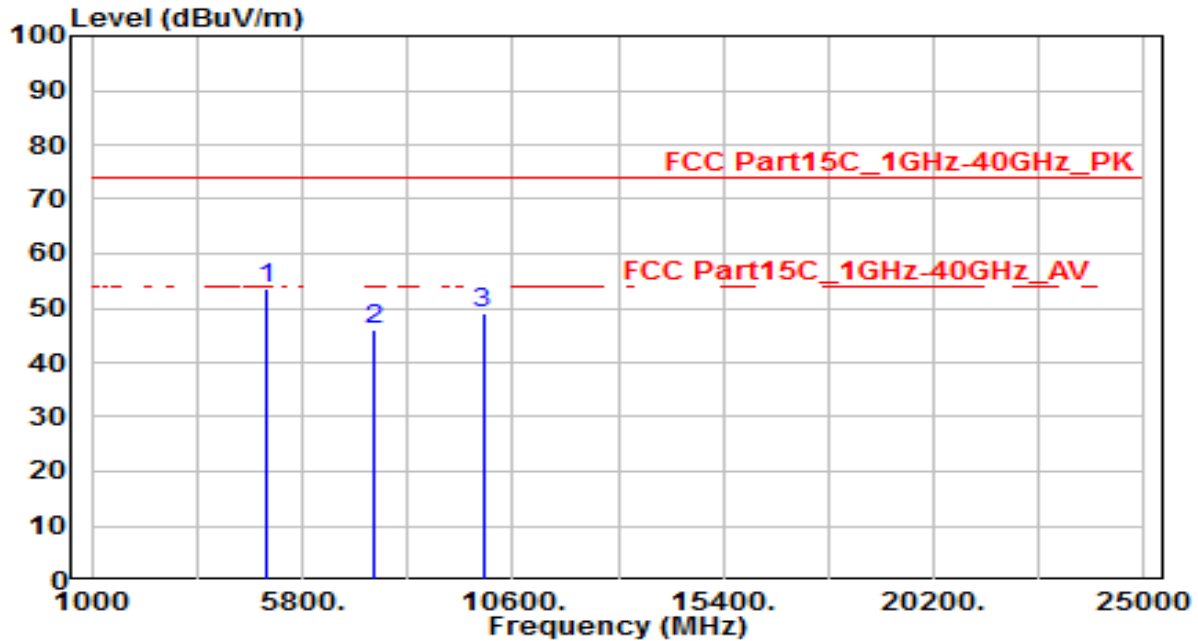


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4960.000	50.17	3.47	53.64	-20.36	74.00	150	400	Peak
2		7440.000	34.56	11.58	46.14	-27.86	74.00	150	400	Peak
3		9920.000	33.96	15.00	48.96	-25.04	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS852B	Date of Test	2019-10-31
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_3DH5 CH0	Test Voltage	AC 120V/60Hz

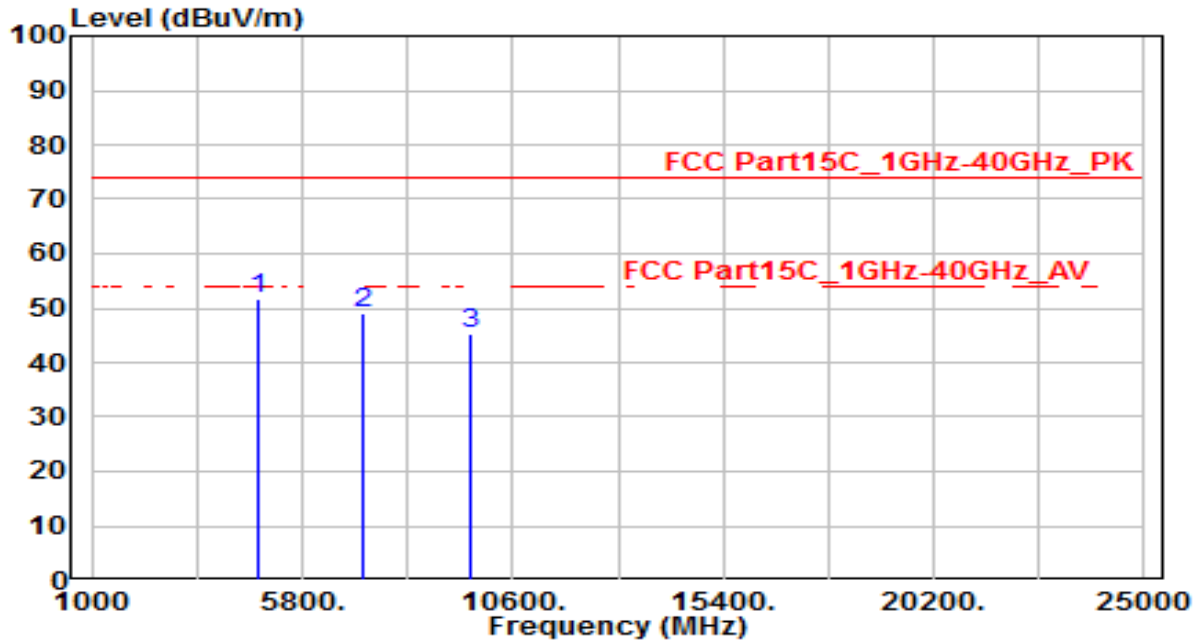


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 4804.000	48.53	3.16	51.69	-22.31	74.00	150	400	Peak
2	7206.000	38.06	11.06	49.12	-24.88	74.00	150	400	Peak
3	9608.000	31.35	13.97	45.32	-28.68	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS852B	Date of Test	2019-10-31
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_3DH5 CH0	Test Voltage	AC 120V/60Hz

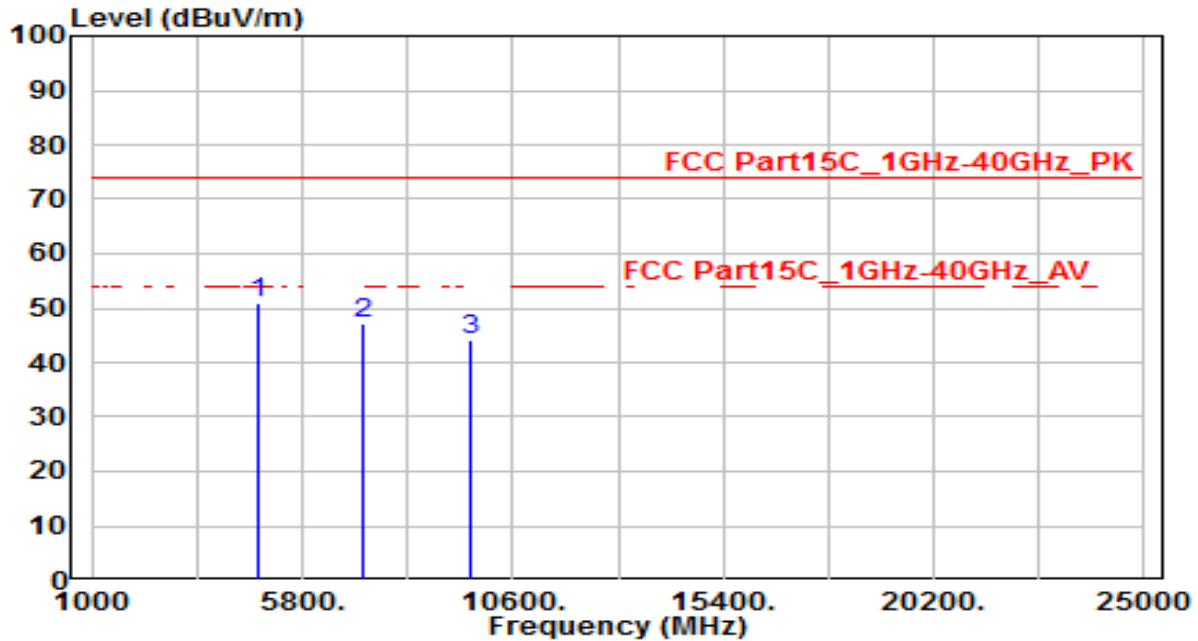


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 4804.000	47.71	3.16	50.87	-23.13	74.00	150	400	Peak
2	7206.000	35.99	11.06	47.05	-26.95	74.00	150	400	Peak
3	9608.000	30.28	13.97	44.25	-29.75	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS852B	Date of Test	2019-10-31
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_3DH5 CH39	Test Voltage	AC 120V/60Hz

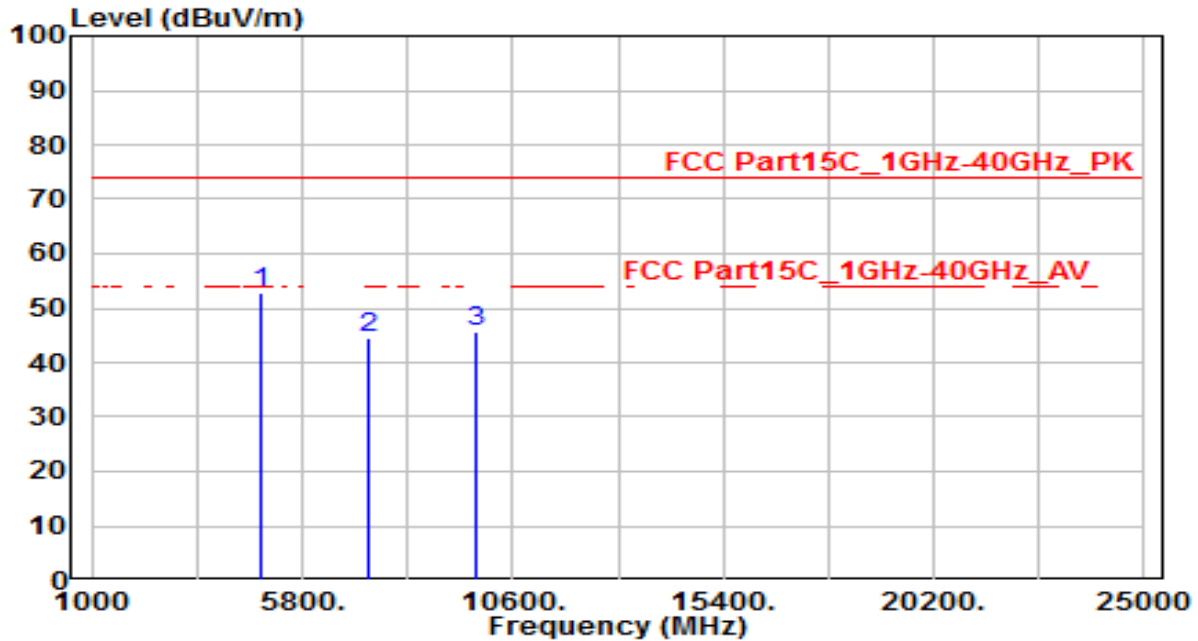


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4882.000	49.56	3.31	52.87	-21.13	74.00	150	400	Peak
2		7323.000	33.25	11.32	44.57	-29.43	74.00	150	400	Peak
3		9764.000	31.10	14.49	45.59	-28.41	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS852B	Date of Test	2019-10-31
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_3DH5 CH39	Test Voltage	AC 120V/60Hz

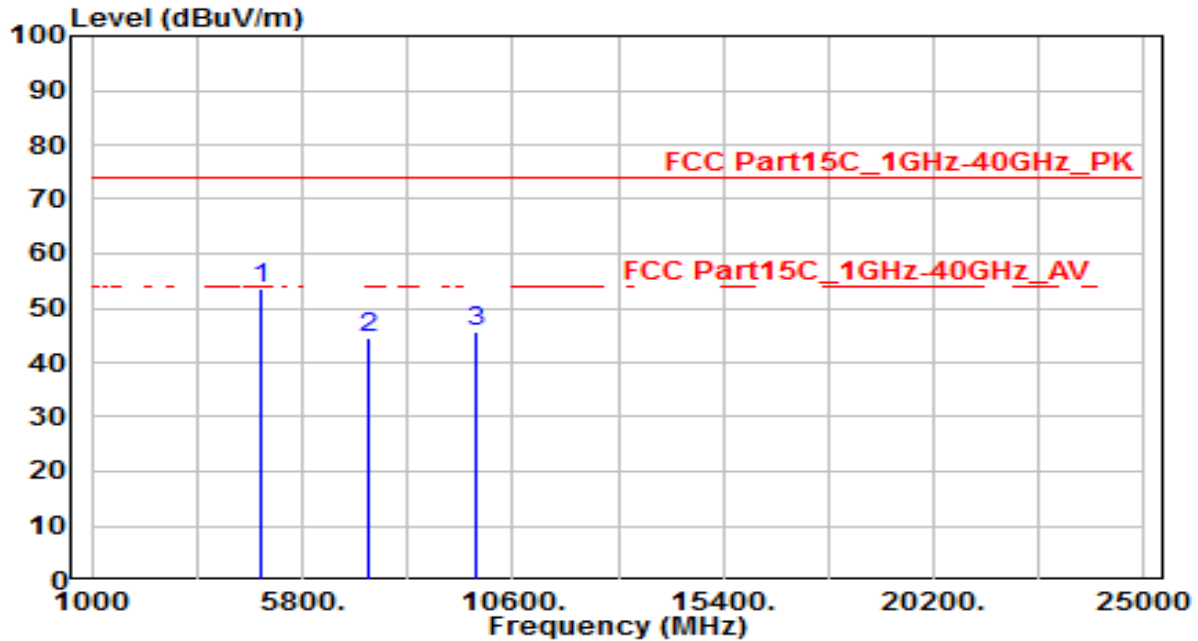


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 4882.000	50.37	3.31	53.68	-20.32	74.00	150	400	Peak
2	7323.000	33.36	11.32	44.68	-29.32	74.00	150	400	Peak
3	9764.000	31.02	14.49	45.51	-28.49	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS852B	Date of Test	2019-10-31
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_3DH5 CH78	Test Voltage	AC 120V/60Hz

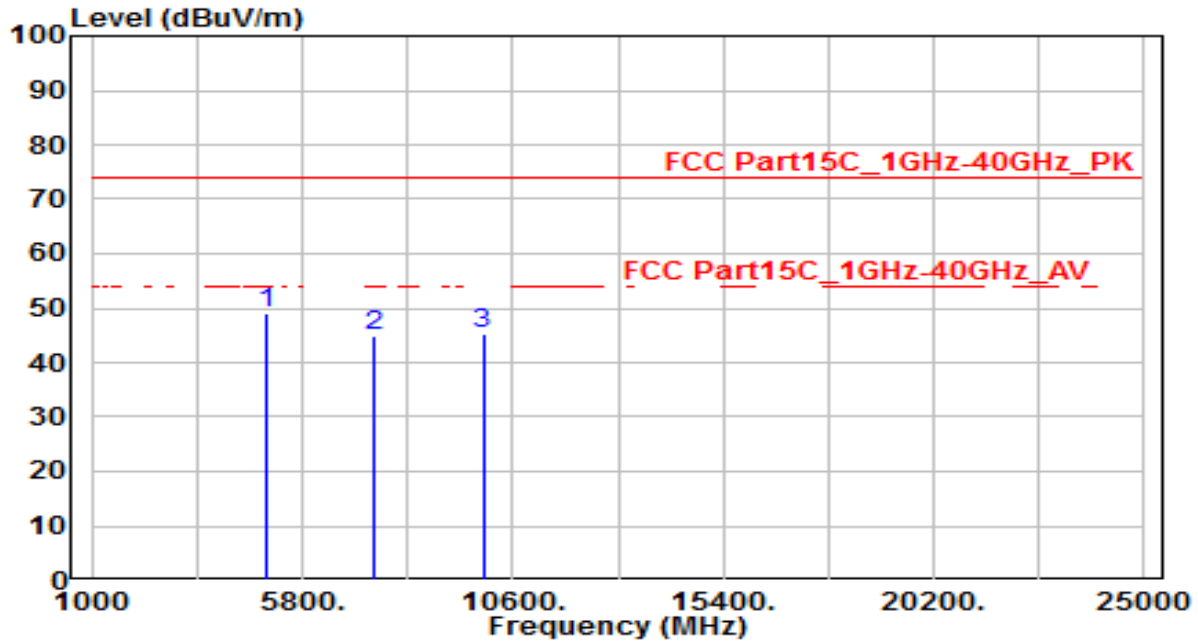


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4960.000	45.60	3.47	49.07	-24.93	74.00	150	400	Peak
2		7440.000	33.14	11.58	44.72	-29.28	74.00	150	400	Peak
3		9920.000	30.15	15.00	45.15	-28.85	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS852B	Date of Test	2019-10-31
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_3DH5 CH78	Test Voltage	AC 120V/60Hz

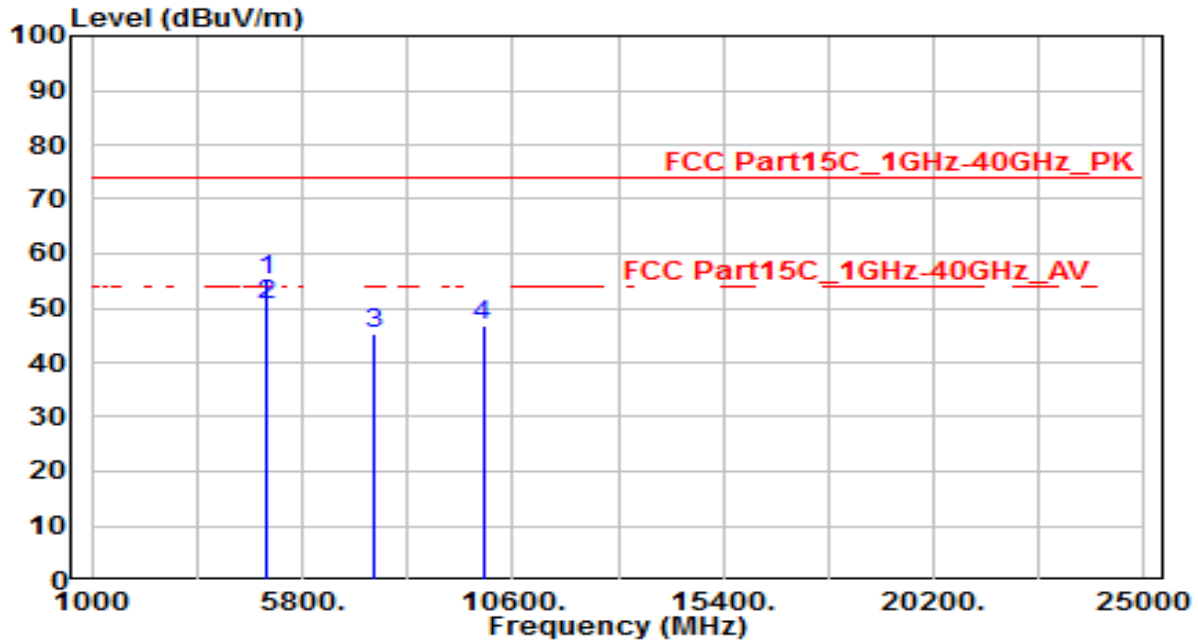

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4960.000	51.75	3.47	55.22	-18.78	74.00	150	160	Peak
2	*	4960.000	47.19	3.47	50.66	-3.34	54.00	150	160	Average
3		7440.000	33.68	11.58	45.26	-28.74	74.00	150	400	Peak
4		9920.000	31.88	15.00	46.88	-27.12	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. Radiated Restricted Band Edge Measurement

7.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

7.9.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.13

7.9.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3 * RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.9.4. Test Setup

1GHz ~ 18GHz Test Setup:

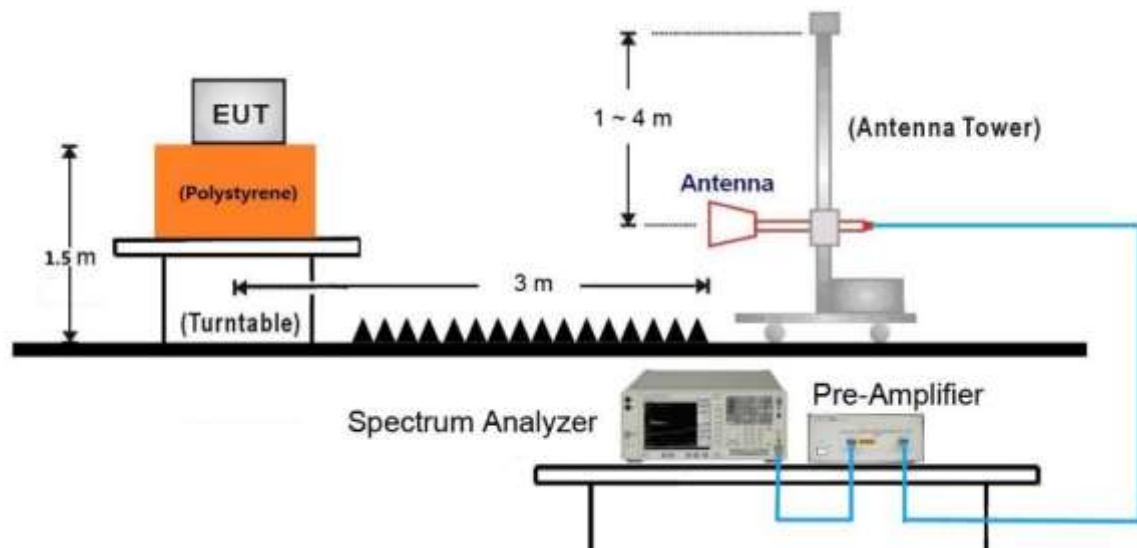


18GHz ~40GHz Test Setup:

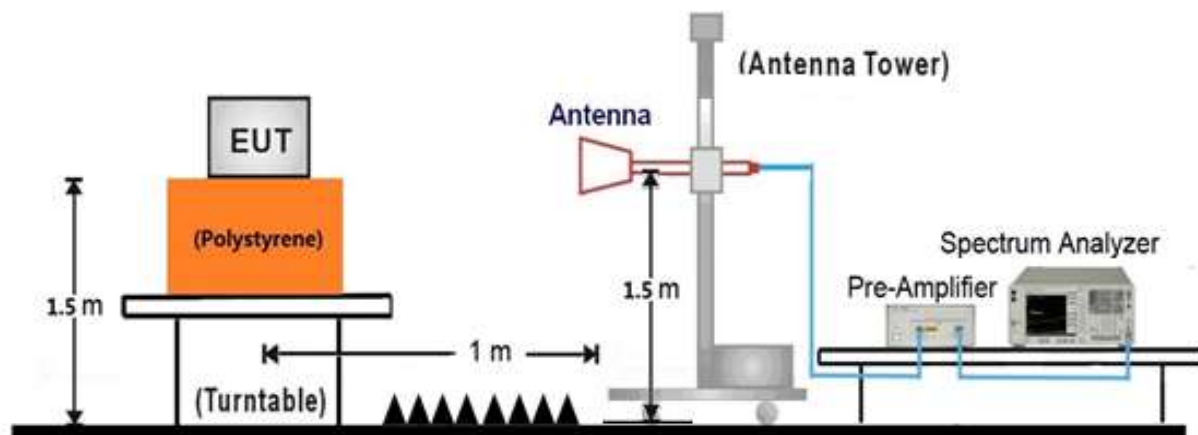

7.9.5. Test Result

EUT	MS852B	Date of Test	2019-10-30
Factor	BBHA 9120D	Temp. / Humidity	25°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_DH5 CH0	Test Voltage	AC 120V/60Hz

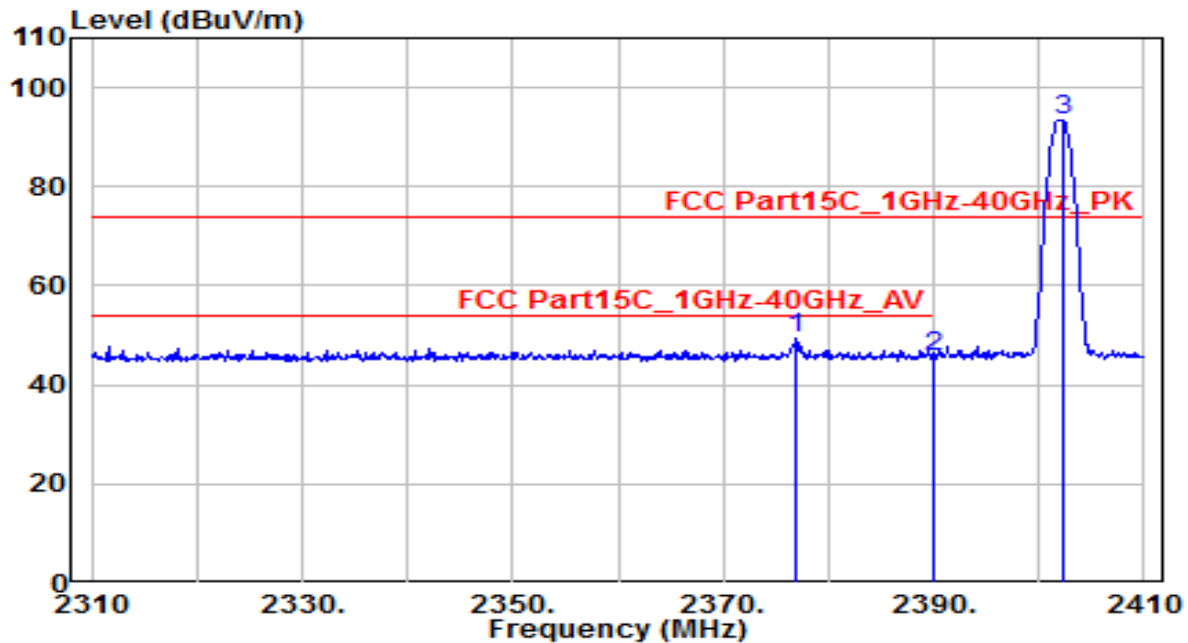


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2376.900	52.18	-2.79	49.39	-24.61	74.00	160	165	Peak
2		2390.000	48.52	-2.73	45.79	-28.21	74.00	160	165	Peak
3		2402.200	96.22	-2.67	93.55	N/A	N/A	160	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS852B	Date of Test	2019-10-30
Factor	BBHA 9120D	Temp. / Humidity	25°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_DH5 CH0	Test Voltage	AC 120V/60Hz

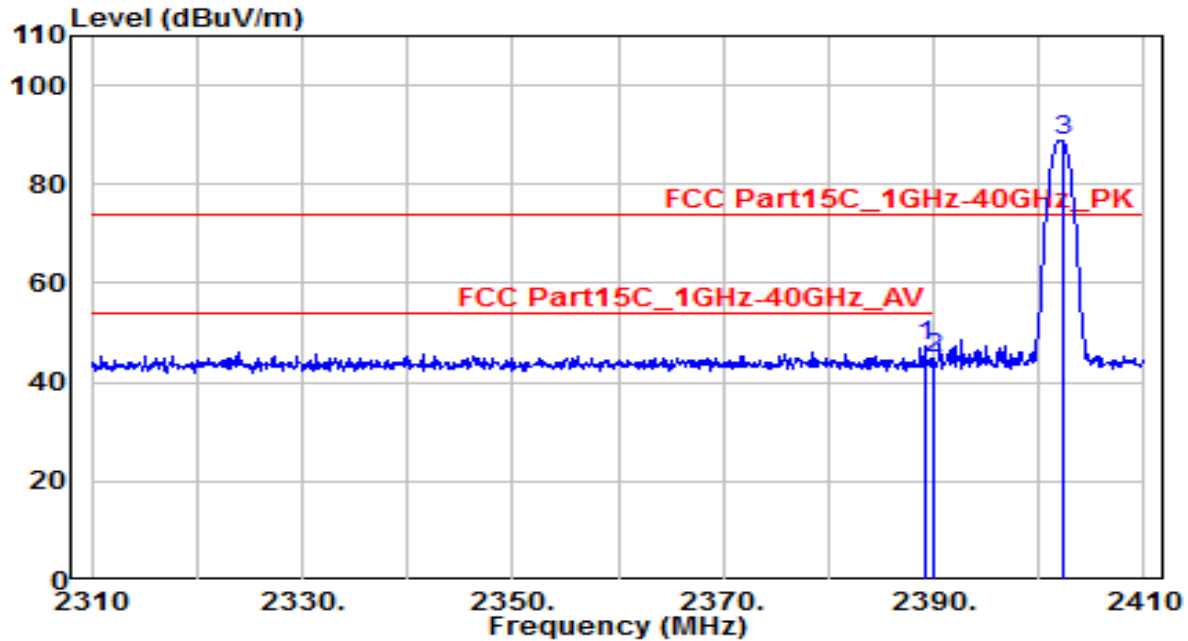


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.100	49.89	-2.73	47.16	-26.84	74.00	165	300	Peak
2		2390.000	47.71	-2.73	44.99	-29.01	74.00	165	300	Peak
3		2402.200	91.54	-2.67	88.87	N/A	N/A	165	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS852B	Date of Test	2019-10-30
Factor	BBHA 9120D	Temp. / Humidity	25°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_DH5 CH78	Test Voltage	AC 120V/60Hz

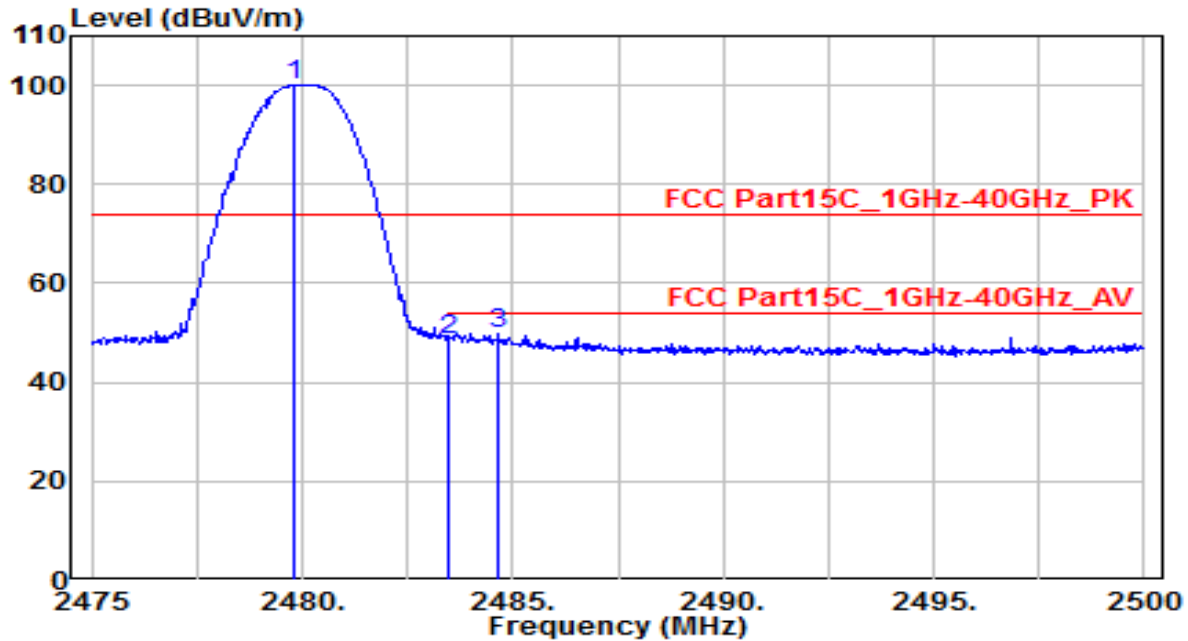


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2479.825	102.51	-2.31	100.20	N/A	N/A	195	180	Peak
2	2483.500	50.99	-2.30	48.69	-25.31	74.00	195	180	Peak
3	* 2484.675	52.16	-2.29	49.87	-24.13	74.00	195	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS852B	Date of Test	2019-10-30
Factor	BBHA 9120D	Temp. / Humidity	25°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_DH5 CH78	Test Voltage	AC 120V/60Hz

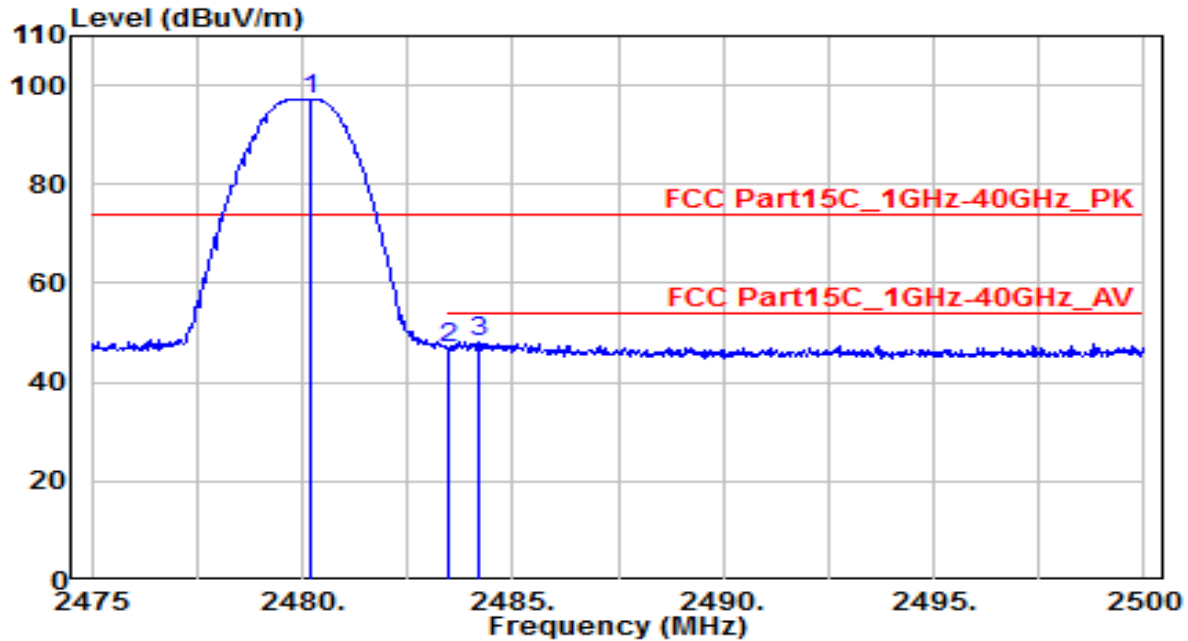


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2480.175	99.50	-2.31	97.19	N/A	N/A	195	265	Peak
2	2483.500	49.33	-2.30	47.04	-26.96	74.00	195	265	Peak
3	* 2484.175	50.44	-2.29	48.15	-25.85	74.00	195	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS852B	Date of Test	2019-10-30
Factor	BBHA 9120D	Temp. / Humidity	25°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_3DH5 CH0	Test Voltage	AC 120V/60Hz

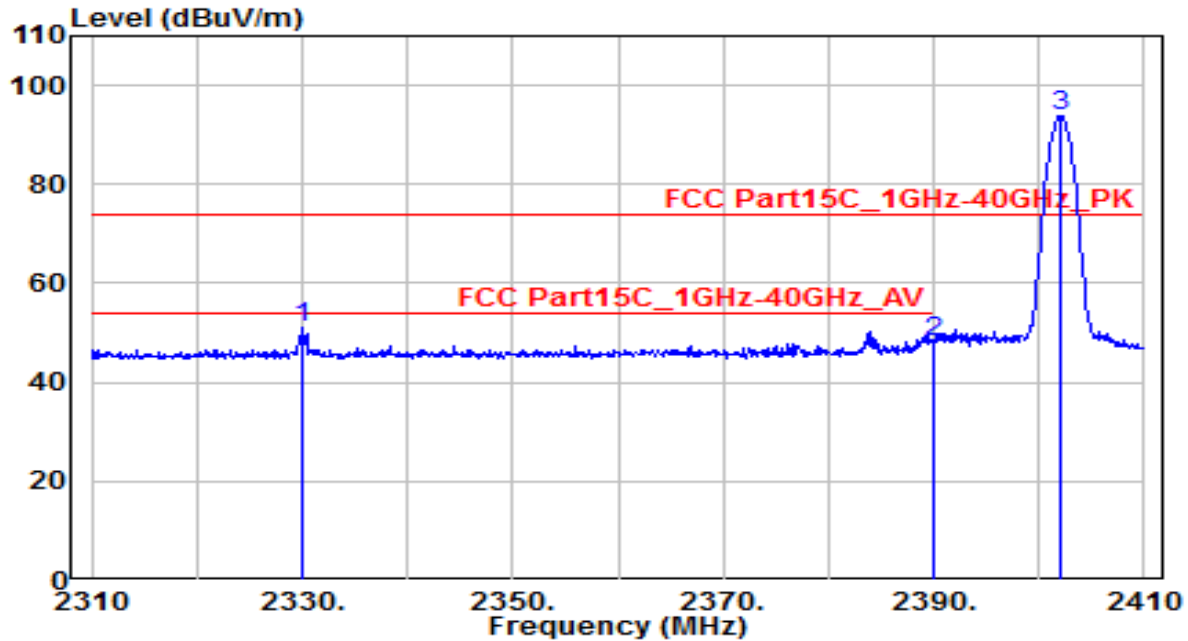


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2330.000	53.98	-3.00	50.98	-23.02	74.00	160	165	Peak
2		2390.000	50.92	-2.73	48.19	-25.81	74.00	160	165	Peak
3		2402.100	96.46	-2.67	93.79	N/A	N/A	160	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS852B	Date of Test	2019-10-30
Factor	BBHA 9120D	Temp. / Humidity	25°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_3DH5 CH0	Test Voltage	AC 120V/60Hz

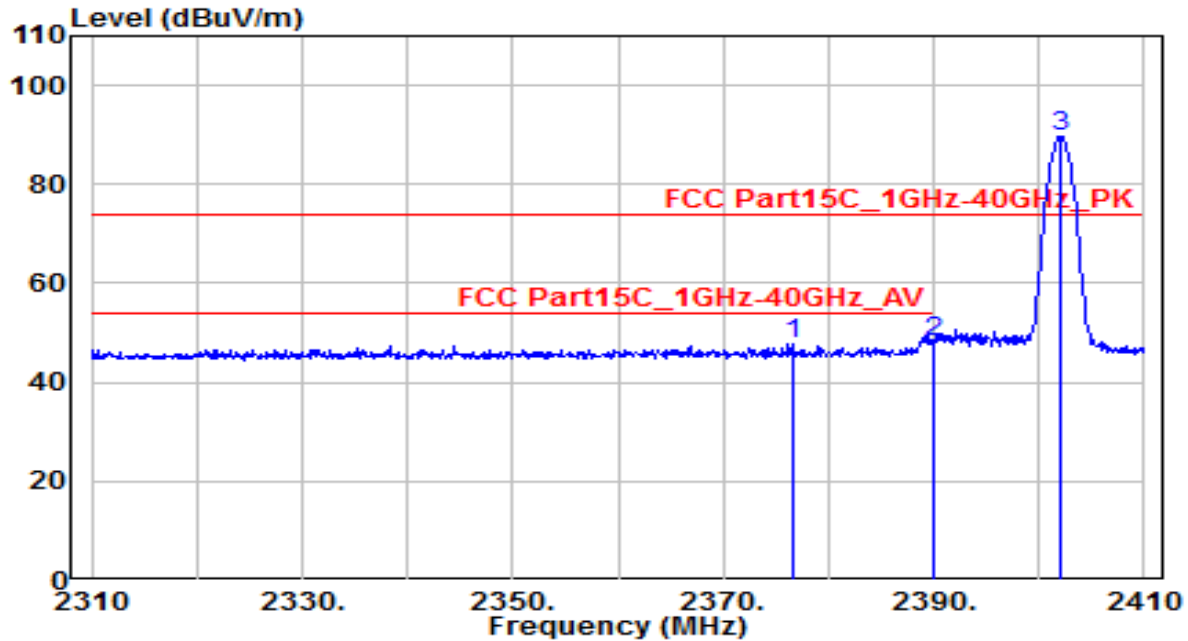


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2376.700	50.63	-2.79	47.84	-26.16	74.00	165	300	Peak
2	* 2390.000	50.92	-2.73	48.19	-25.81	74.00	165	300	Peak
3	2402.100	92.47	-2.67	89.80	N/A	N/A	165	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS852B	Date of Test	2019-10-30
Factor	BBHA 9120D	Temp. / Humidity	25°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_3DH5 CH78	Test Voltage	AC 120V/60Hz

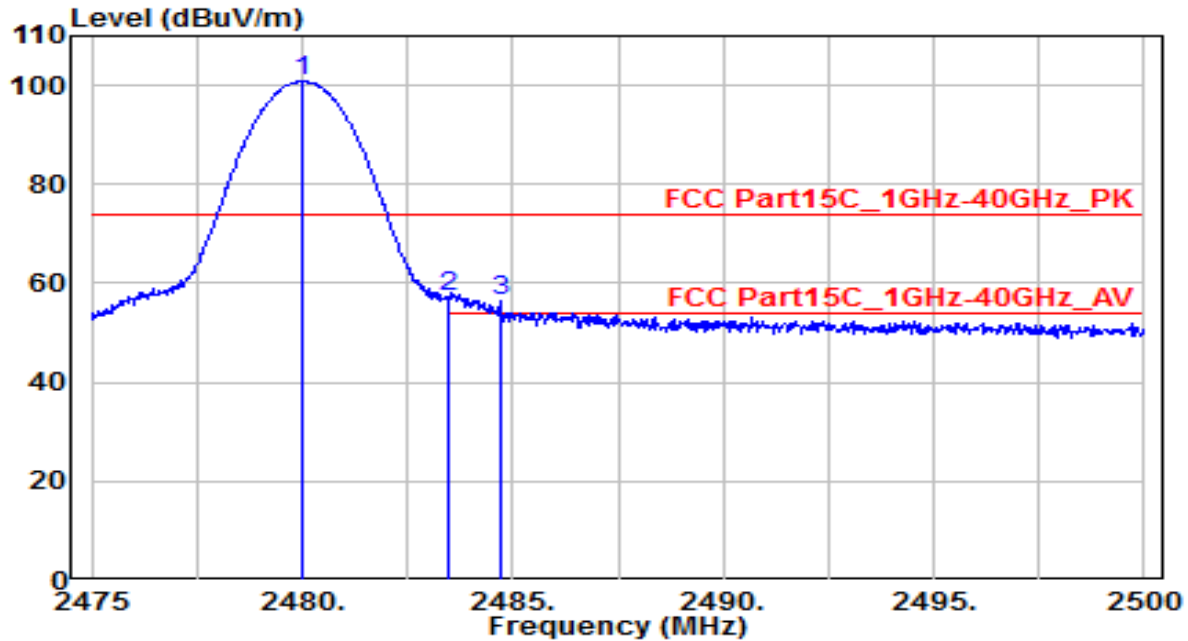


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2480.000	103.10	-2.31	100.78	N/A	N/A	195	180	Peak
2	* 2483.500	59.78	-2.30	57.49	-16.51	74.00	195	180	Peak
3	2484.700	58.77	-2.29	56.48	-17.52	74.00	195	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS852B	Date of Test	2019-10-30
Factor	BBHA 9120D	Temp. / Humidity	25°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_3DH5 CH78	Test Voltage	AC 120V/60Hz

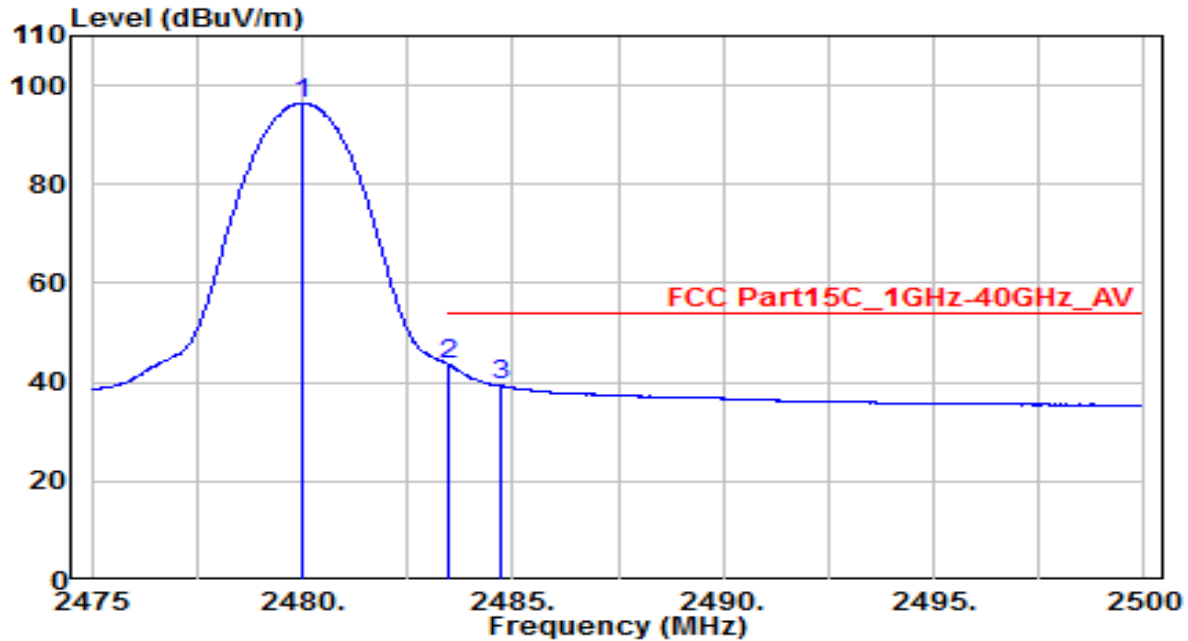


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2480.000	98.66	-2.31	96.35	N/A	N/A	195	180	Average
2	* 2483.500	45.71	-2.30	43.41	-10.59	54.00	195	180	Average
3	2484.700	41.60	-2.29	39.31	-14.69	54.00	195	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS852B	Date of Test	2019-10-30
Factor	BBHA 9120D	Temp. / Humidity	25°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_3DH5 CH78	Test Voltage	AC 120V/60Hz

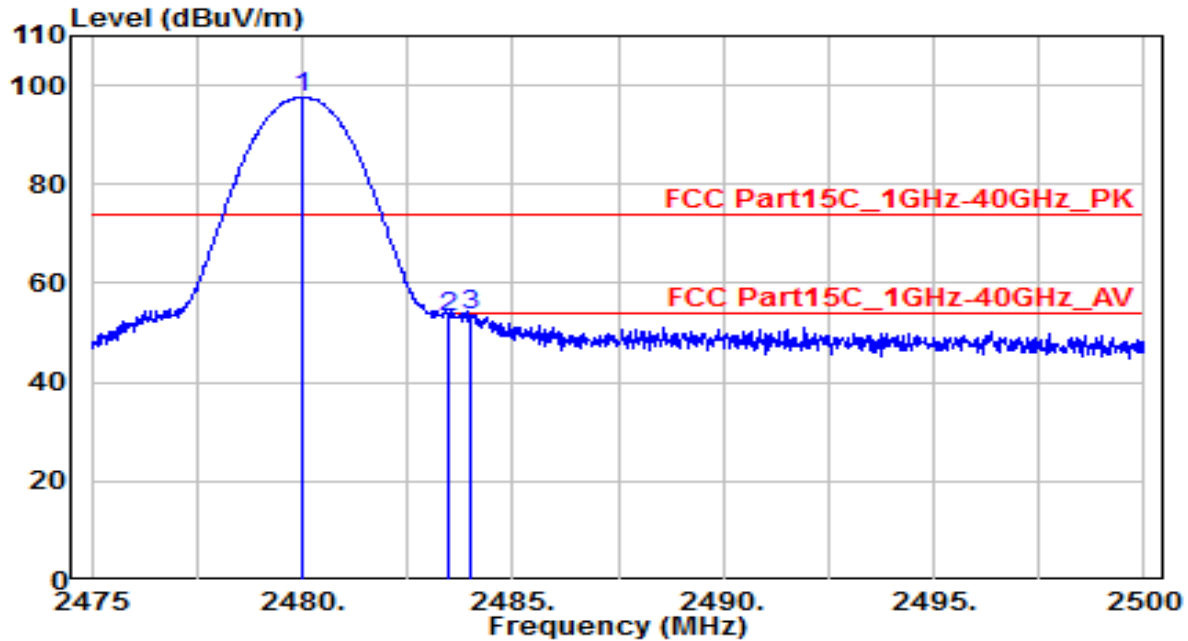


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2480.000	100.02	-2.31	97.71	N/A	N/A	195	265	Peak
2	2483.500	55.47	-2.30	53.17	-20.83	74.00	195	265	Peak
3	* 2484.025	55.96	-2.29	53.66	-20.34	74.00	195	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	MS852B	Date of Test	2019-10-30
Factor	BBHA 9120D	Temp. / Humidity	25°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	BT_TX_3DH5 CH78	Test Voltage	AC 120V/60Hz

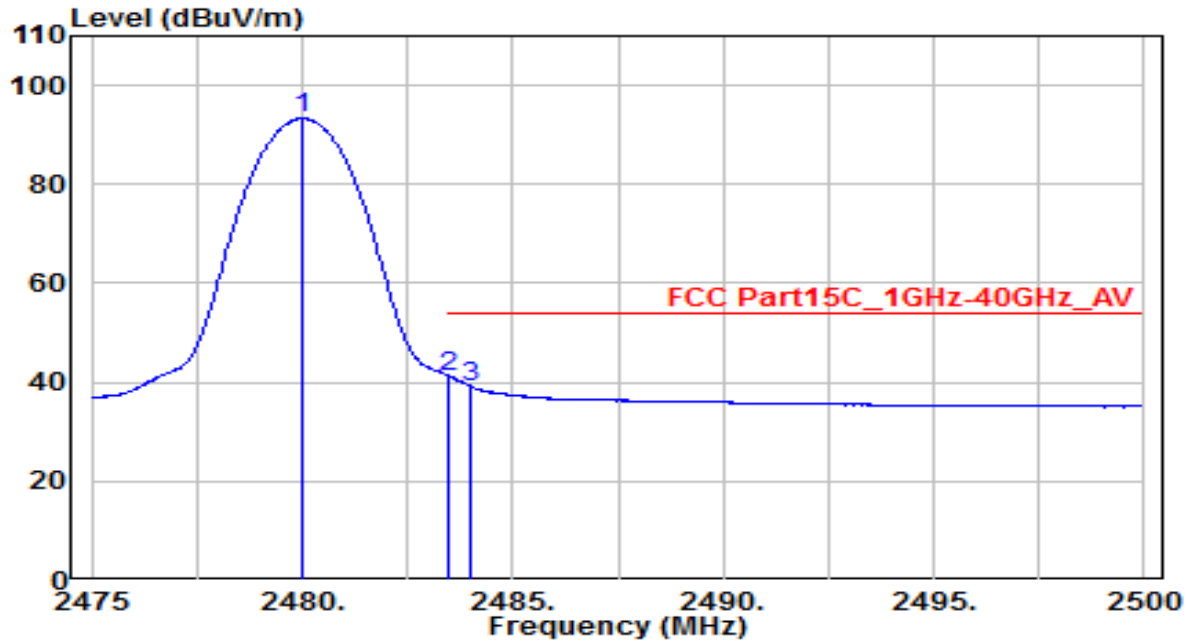

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2480.000	95.62	-2.31	93.31	N/A	N/A	195	265	Average
2	* 2483.500	43.59	-2.30	41.30	-12.70	54.00	195	265	Average
3	2484.025	41.38	-2.29	39.08	-14.92	54.00	195	265	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.10. AC Conducted Emissions Measurement


7.10.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 / RSS-Gen Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.10.2. Test Setup

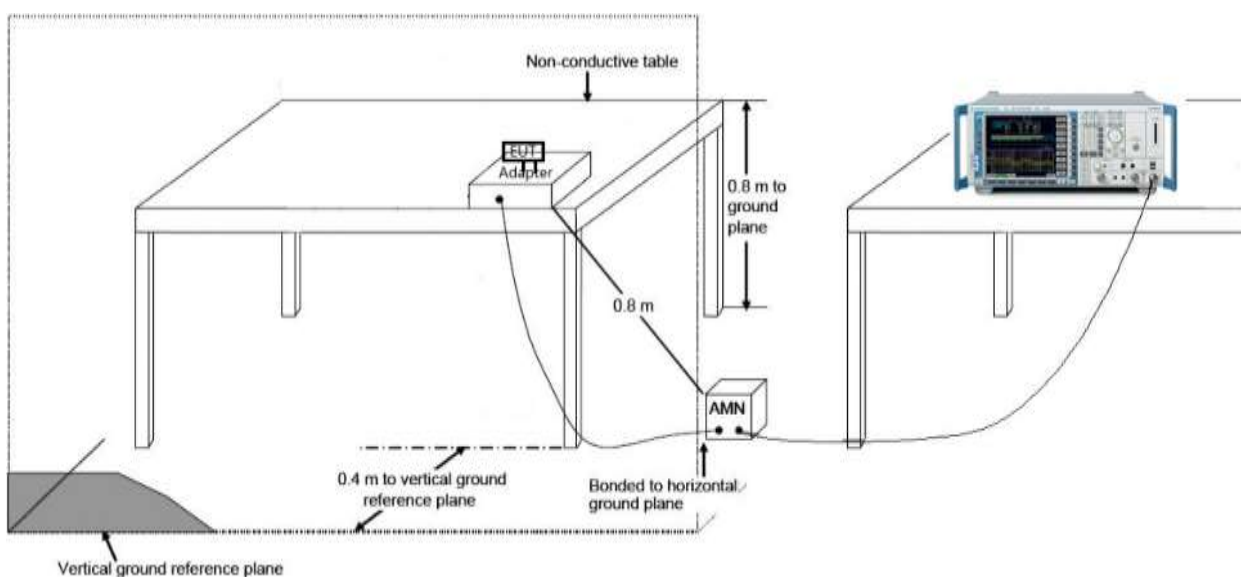

7.10.3. Test Result

EUT	MS852B	Date of Test	2019-10-31
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24.9°C /70%
Polarity	Line1	Site / Test Engineer	SR2 / Peter
Test Mode	BT_TX_DH5_CH39	Test Voltage	AC 120V/60Hz

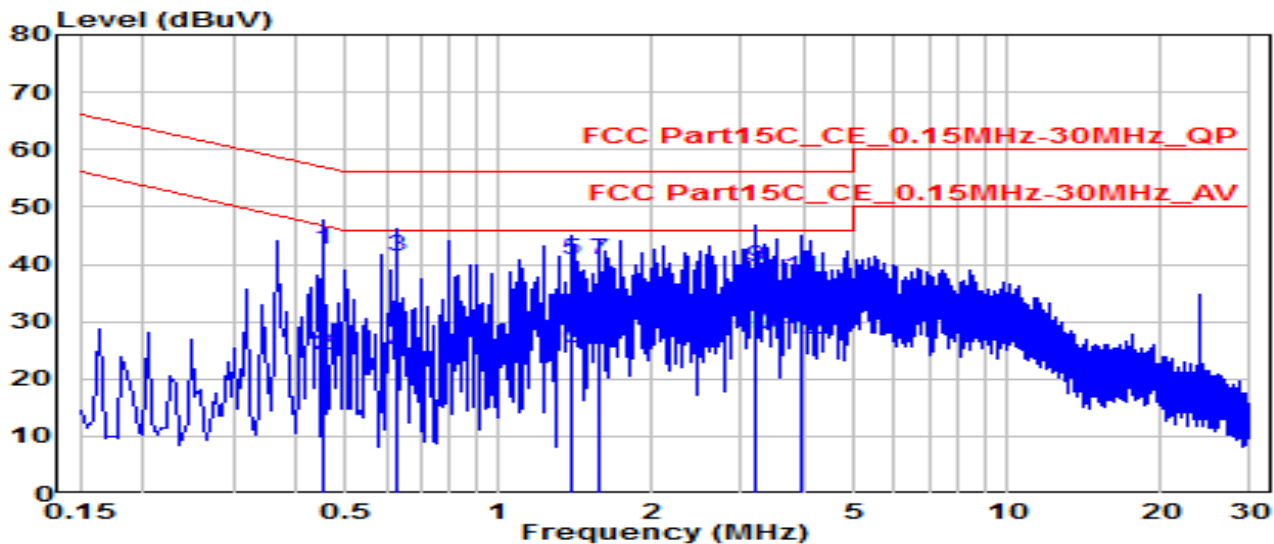


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	0.451	33.07	9.60	42.67	-14.18	56.85	QP
2		0.451	14.61	9.60	24.21	-22.64	46.85	Average
3		0.631	31.88	9.62	41.49	-14.51	56.00	QP
4		0.631	14.98	9.62	24.60	-21.40	46.00	Average
5		1.396	31.15	9.67	40.83	-15.17	56.00	QP
6		1.396	15.74	9.67	25.41	-20.59	46.00	Average
7		1.576	31.08	9.68	40.76	-15.24	56.00	QP
8		1.576	15.34	9.68	25.01	-20.99	46.00	Average
9		3.196	29.99	9.71	39.69	-16.31	56.00	QP
10	*	3.196	18.16	9.71	27.87	-18.13	46.00	Average
11		3.939	28.01	9.72	37.73	-18.27	56.00	QP
12		3.939	17.11	9.72	26.83	-19.17	46.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	MS852B	Date of Test	2019-10-31
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24.9°C /70%
Polarity	Neutral	Site / Test Engineer	SR2 / Peter
Test Mode	BT_TX_DH5_CH39	Test Voltage	AC 120V/60Hz

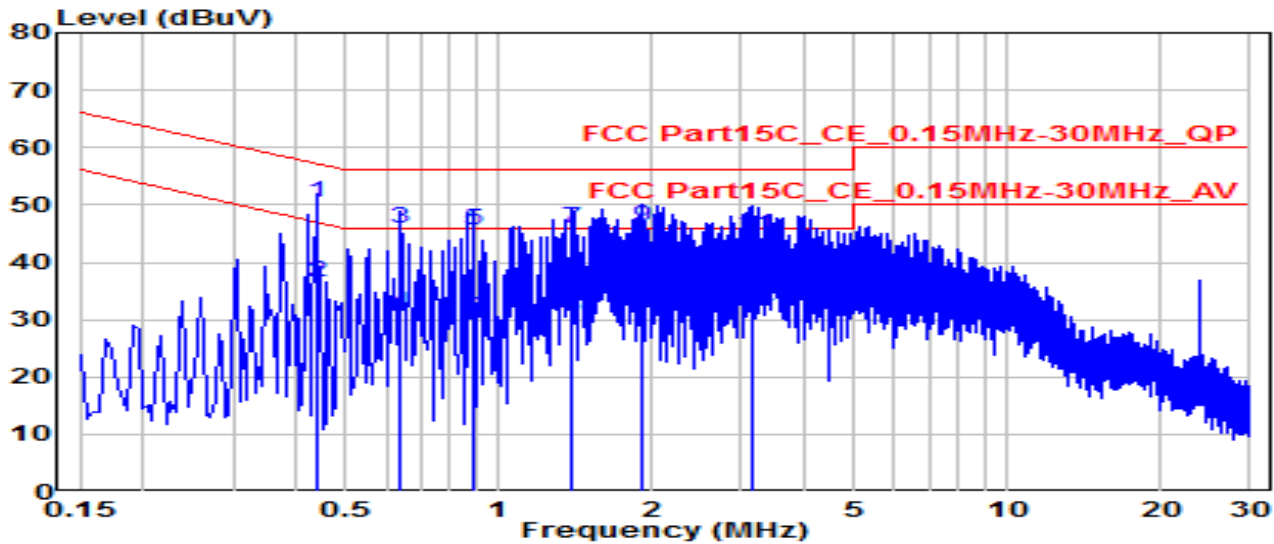

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	0.438	40.73	9.61	50.34	-6.76	57.10	QP
2	*	0.438	26.91	9.61	36.52	-10.58	47.10	Average
3		0.640	36.23	9.62	45.86	-10.14	56.00	QP
4		0.640	21.45	9.62	31.07	-14.93	46.00	Average
5		0.892	36.03	9.65	45.68	-10.32	56.00	QP
6		0.892	20.67	9.65	30.32	-15.68	46.00	Average
7		1.383	36.12	9.67	45.79	-10.21	56.00	QP
8		1.383	20.81	9.67	30.48	-15.52	46.00	Average
9		1.923	36.53	9.68	46.21	-9.79	56.00	QP
10		1.923	21.05	9.68	30.73	-15.27	46.00	Average
11		3.160	34.86	9.70	44.56	-11.44	56.00	QP
12		3.160	22.47	9.70	32.17	-13.83	46.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Bluetooth Barcode Scanner** is in compliance with Part 15C of the FCC Rules.

_____ The End _____