



Radio Test Report

FCC ID: HLEMT880BTNF

This report concerns (check one) : ☒ Original Grant ☐ Class II Change

Issued Date : Oct. 31, 2013
Project No. : 1309202
Equipment : Multi-functional Master Controller
Model Name : MT880

Applicant : unitech electronics co., ltd.
Address : 5F, No. 136, Lane 235, Pao-Chiao Rd.,
Hsin-Tien Dist., New Taipei City, Taiwan

Tested by: Neutron Engineering Inc. EMC Laboratory
Date of Receipt: Sep. 24, 2013
Date of Test: Sep. 24, 2013 ~ Oct. 25, 2013

Testing Engineer:

(Josh Lin)

Technical Manager:

(Jeff Yang)

Authorized Signatory:

(Andy Chiu)

Neutron Engineering Inc.
B1, No. 37, Lane 365, YangGuang St.,
NeiHu District 114, Taipei, Taiwan.
TEL: +886-2-2657-3299
FAX: +886-2-2657-3331



**Declaration**

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron's** authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents

REPORT ISSUED HISTORY	6
1 CERTIFICATION	7
2 SUMMARY OF TEST RESULTS	8
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	10
3 GENERAL INFORMATION	11
3.1 GENERAL DESCRIPTION OF EUT	11
3.2 DESCRIPTION OF TEST MODES	13
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	14
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	15
3.5 DESCRIPTION OF SUPPORT UNITS	16
4 CONDUCTED EMISSION	17
4.1 LIMIT	17
4.2 MEASUREMENT INSTRUMENTS LIST	17
4.3 TEST PROCEDURES	18
4.4 TEST SETUP LAYOUT	18
4.5 DEVIATION FROM TEST STANDARD	18
4.6 EUT OPERATING CONDITIONS	18
4.7 TEST RESULTS	19
5 ANTENNA CONDUCTED SPURIOUS EMISSION	21
5.1 LIMIT	21
5.2 MEASUREMENT INSTRUMENTS LIST	21
5.3 TEST PROCEDURES	21
5.4 TEST SETUP LAYOUT	21
5.5 DEVIATION FROM TEST STANDARD	21
5.6 EUT OPERATING CONDITIONS	21
5.7 TEST RESULTS - 2400-2483.5 MHZ	22
6 6 DB BANDWIDTH	34
6.1 LIMIT	34
6.2 MEASUREMENT INSTRUMENTS LIST	34
6.3 TEST PROCEDURES	34
6.4 TEST SETUP LAYOUT	34
6.5 DEVIATION FROM TEST STANDARD	34
6.6 EUT OPERATING CONDITIONS	34
6.7 TEST RESULTS - 2400-2483.5 MHZ	35
7 MAXIMUM PEAK CONDUCTED OUTPUT POWER	41
7.1 LIMIT	41
7.2 MEASUREMENT INSTRUMENTS LIST	41



Table of Contents

7.3	TEST PROCEDURES	41
7.4	TEST SETUP LAYOUT	41
7.5	DEVIATION FROM TEST STANDARD	41
7.6	EUT OPERATING CONDITIONS	41
7.7	TEST RESULTS - 2400-2483.5 MHZ	42
8	RADIATED SPURIOUS EMISSION (9 KHZ TO 1 GHZ)	45
8.1	LIMIT	45
8.2	MEASUREMENT INSTRUMENTS LIST	46
8.3	MEASURING INSTRUMENTS SETTING	46
8.4	TEST PROCEDURES	47
8.5	DEVIATION FROM TEST STANDARD	47
8.6	TEST SETUP LAYOUT	47
8.7	EUT OPERATING CONDITIONS	48
8.8	TEST RESULTS - 2400-2483.5 MHZ	49
9	RADIATED SPURIOUS EMISSION (ABOVE 1 GHZ)	51
9.1	LIMIT	51
9.2	MEASUREMENT INSTRUMENTS LIST	52
9.3	MEASURING INSTRUMENTS SETTING	52
9.4	TEST PROCEDURES	53
9.5	DEVIATION FROM TEST STANDARD	53
9.6	TEST SETUP LAYOUT	53
9.7	EUT OPERATING CONDITIONS	54
9.8	TEST RESULTS - 2400-2483.5 MHZ	55
9.9	TEST RESULTS (RESTRICTED BANDS)	91
10	POWER SPECTRAL DENSITY	103
10.1	LIMIT	103
10.2	MEASUREMENT INSTRUMENTS LIST	103
10.3	TEST PROCEDURES	103
10.4	TEST SETUP LAYOUT	103
10.5	DEVIATION FROM TEST STANDARD	103
10.6	EUT OPERATING CONDITIONS	103
10.7	TEST RESULTS - 2400-2483.5 MHZ	104
11	RF EXPOSURE COMPLIANCE	110
11.1	LIMIT	110
11.2	MEASUREMENT INSTRUMENTS LIST	110
11.3	MPE CALCULATION METHOD	110
11.4	TEST SETUP LAYOUT	111
11.5	DEVIATION FROM TEST STANDARD	111



Table of Contents

11.6	EUT OPERATING CONDITIONS	111
11.7	TEST RESULTS - 2400-2483.5 MHZ	112
12	EUT TEST PHOTO	115



REPORT ISSUED HISTORY

Revised Version No.	Description	Issued Date
-	Initial Issue.	Oct. 31, 2013



1 CERTIFICATION

Equipment : Multi-functional Master Controller
Brand Name : unitech; TASHI
Model Name : MT880
Applicant : unitech electronics co., ltd.
Date of Test : Sep. 24, 2013 ~ Oct. 25, 2013
Standards : FCC Part 15, Subpart C: 2012
ANSI C63.4: 2009

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-1309202) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP and TAF according to the ISO-17025 quality assessment standard and technical standard(s).

**2. SUMMARY OF TEST RESULTS**

FCC Part 15, Subpart C: 2012		
Standard Clause	Test Item	Result
FCC Part 15, Subpart C		
15.207	Conducted Emission	PASS
15.247 (c)	Antenna conducted Spurious Emission	PASS
15.247 (a)(2)	6 dB Bandwidth	PASS
15.247 (b)	Maximum Peak Conducted Output Power	PASS
15.247 (c)	Radiated Spurious Emission	PASS
15.247 (d)(e)	Power Spectral Density	PASS
15.205	Restricted Bands	PASS
15.203	Antenna Requirement	PASS
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	PASS

NOTE:

- (1) N/A: denotes test is not applicable in this Test Report
- (2) Portable device; SAR report is required.
- (3) The EUT include WiFi & Bluetooth function and RFID function, this report covers EUT WiFi function only. It's Bluetooth & RFID function testing is covered in another test report: NEI-FCCP-2-1309202(Bluetooth), NEI-FCCP-3-1309202(RFID).



2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

Conducted emission Test:

C02: (VCCI RN: C-3477; FCC RN: 614388; FCC DN: TW1054)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

Radiated emission Test (Below 1 GHz):

CB08: (FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428C-1)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

Radiated emission Test (Above 1 GHz):

CB08: (VCCI RN: G-91; FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428C-1)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)



2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty is not specified by FCC/Industry Canada rules and for reference only.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

A. Conducted emission test:

Test Site	Measurement Frequency Range	U , (dB)	NOTE
C02	150 kHz ~ 30 MHz	2.59	

B. Radiated emission test:

Test Site	Item	Measurement Frequency Range	Uncertainty	NOTE
CB08	Radiated emission at 3m	Horizontal Polarization	30 - 200MHz	3.35 dB
			200 - 1000MHz	3.11 dB
			1 - 18GHz	3.97 dB
			18 - 40GHz	4.01 dB
		Vertical Polarization	30 - 200MHz	3.22 dB
			200 - 1000MHz	3.24 dB
			1 - 18GHz	4.05 dB
			18 - 40GHz	4.04 dB

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our U_{lab} values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called U_{CISPR} , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz: 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz: 5.2 dB

It can be seen that our U_{lab} values are smaller than U_{CISPR} .

If U_{lab} is less than or equal to U_{CISPR} , then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{CISPR} , then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{CISPR})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{CISPR})$, exceeds the disturbance limit.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Multi-functional Master Controller	
Brand Name	unitech; TASHI	
Model Name	MT880	
OEM Brand/Model Name	N/A	
Model Difference	N/A	
Product Description	The EUT is a Multi-functional Master Controller.	
	Operation Frequency	2412~2462 MHz
	Modulation Type	DBPSK, DQPSK, CCK, BPSK, QPSK, 16QAM, 64QAM, MIMO 2412~2462 MHz: IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM
	Bit Rate of Transmitter	IEEE 802.11b: 1, 2, 5.5 and 11 Mbps IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n: HT20: 130 Mbps (max.)
	Number Of Channel	Please refer to the Note 2.
	Antenna Designation	Please refer to the Note 3.
	Antenna Gain(Peak)	Please refer to the Note 3.
	Maximum Conducted Output Power	Peak Output Power: 2412~2462 MHz: IEEE 802.11b: 18.39 dBm IEEE 802.11g: 22.11 dBm IEEE 802.11n (20 MHz): 22.25 dBm Avg Output Power: 2412~2462 MHz: IEEE 802.11b: dBm IEEE 802.11g: dBm IEEE 802.11n (20 MHz): dBm
	More details of EUT technical specification, please refer to the User's Manual.	
Power Source	DC Voltage supplied from External Power Supply.	
Power Rating	1. EUT: I/P: DC 12V 2A 2. SWITCHING ADAPTER: I/P: AC 100-240V 1.0A MAX 50-60Hz / O/P: DC +12V 2.0A 24W MAX.	
Connecting I/O Port(s)	Please refer to the User's Manual	
Products Covered	1 * SWITCHING ADAPTER: Sunny / SYS1319-2412-T3 1 * 10.1" LCD Panel: AU / B101EW05 1 * Wi-Fi & Bluetooth Module: SDC-SSD40NBT 1 * RFID Module	
EUT Modification(s)	N/A	

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2. Channel List:

2412-2462 MHz Band (IEEE 802.11b/g/n (20MHz))					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	05	2432	09	2452
02	2417	06	2437	10	2457
03	2422	07	2442	11	2462
04	2427	08	2447		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	Joymax Electronics Co., Ltd.	202462	PIFA	I-PEX	2.50

4. The EUT incorporates MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

2412-2462 MHz Band	
Modulated type	TX Function
IEEE 802.11b	1 TX
IEEE 802.11g	1 TX
IEEE 802.11n (20MHz)	1 TX



3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

2412-2462 MHz Band					
Test Items	IEEE	Mode	Data Rate	Channel	Note
Conducted Emission	802.11b	DSSS	1 Mbps	06	
Antenna conducted Spurious Emission	802.11b	DSSS	1 Mbps	01/06/11	
	802.11g	OFDM	6 Mbps	01/06/11	
	802.11n (20 MHz)	BPSK	MCS8	01/06/11	
6 dB Bandwidth	802.11b	DSSS	1 Mbps	01/06/11	
	802.11g	OFDM	6 Mbps	01/06/11	
	802.11n (20 MHz)	BPSK	MCS8	01/06/11	
Maximum Peak Conducted Output Power	802.11b	DSSS	1 Mbps	01/06/11	
	802.11g	OFDM	6 Mbps	01/06/11	
	802.11n (20 MHz)	BPSK	MCS8	01/06/11	
Radiated Spurious Emission (30 MHz to 1 GHz)	802.11n (20 MHz)	OFDM	MCS8	06	
Radiated Spurious Emission (above 1 GHz)	802.11b	DSSS	1 Mbps	01/06/11	
	802.11g	OFDM	6 Mbps	01/06/11	
	802.11n (20 MHz)	BPSK	MCS8	01/06/11	
Restricted Bands	802.11b	DSSS	1 Mbps	01/06/11	
	802.11g	OFDM	6 Mbps	01/06/11	
	802.11n (20 MHz)	BPSK	MCS8	01/06/11	
Antenna Requirement	---		---	---	
RF Exposure Compliance	---		---	---	

NOTE: The measurements are performed at the highest, middle, lowest available channels.

**3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING**


During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

2412-2462 MHz Band						
IEEE	802.11b			802.11g		
Test software Version						
Frequency	2412 MHz	2437 MHz	2462 MHz	2412 MHz	2437 MHz	2462 MHz
Parameter	Def.	Def.	Def.	Def.	Def.	Def.

2412-2462 MHz Band			
IEEE	802.11n (20 MHz)		
Test software Version			
Frequency	2412 MHz	2437 MHz	2462 MHz
Parameter	Def.	Def.	Def.



3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

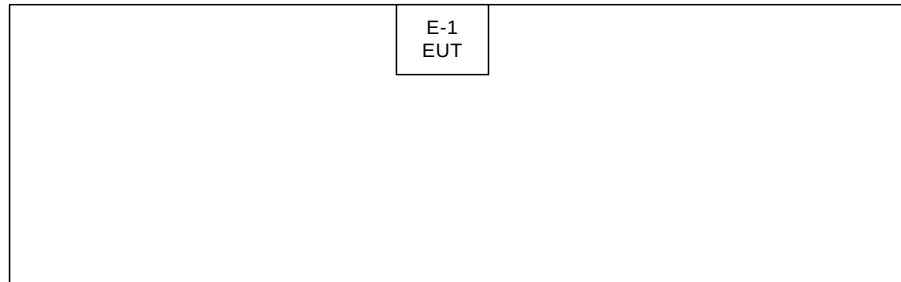

**3.5 DESCRIPTION OF SUPPORT UNITS**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	Multi-functional Master Controller	unitech	MT880	HLEMT880BTNF	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
N/A	-	-	-	-

NOTE: The support equipment was authorized by Declaration of Conformity (DOC).



4 CONDUCTED EMISSION

4.1 LIMIT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 - 5.0	73.00	60.00	56.00	46.00
5.0 - 30.0	73.00	60.00	60.00	50.00

NOTE:

1. The tighter limit applies at the band edges.
2. The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
3. The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value – Limit Value

4.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	Schwarzbeck	NSLK 8127	8127685	Feb. 24, 2014
2	Test Cable	TIMES	CFD300-NL	C01	Jun. 16, 2014
3	EMI Test Receiver	Agilent	N9038A	MY51210215	Mar. 21, 2014
4	Measurement Software	EZ	EZ_EMC (Version NB-02A)	N/A	N/A

NOTE: **N/A:** denotes No Model Name, No Serial No. or No Calibration specified.


4.3 TEST PROCEDURES

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

NOTE:

- Reading in which marked as Peak, QP or AVG means measurements by using are Quasi-Peak or Average Mode with Detector BW=9 kHz (6 dB Bandwidth).
- All readings are Peak Mode value unless otherwise stated QP or AVG in column of Note. If the Peak or QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only Peak or QP Mode was measured, but AVG Mode didn't perform.

4.4 TEST SETUP LAYOUT

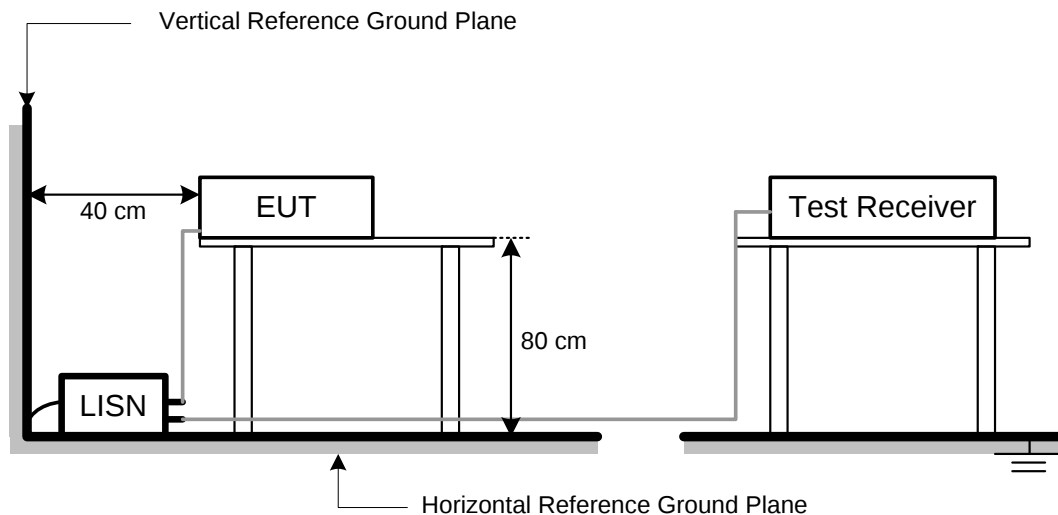

4.5 DEVIATION FROM TEST STANDARD

No deviation

4.6 EUT OPERATING CONDITIONS

The EUT used during radiated and/or conducted emission measurement was designed to exercise in a manner similar to a typical use.



4.7 TEST RESULTS

E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	24°C	Relative Humidity	48%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11b/2437 MHz		

Phase: Line



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1521	41.89	8.71	50.60	65.88	-15.28	peak	
2		0.3467	32.91	7.81	40.72	59.04	-18.32	peak	
3		1.1480	28.06	9.64	37.70	56.00	-18.30	peak	
4		2.6870	30.04	9.38	39.42	56.00	-16.58	peak	
5		5.1500	30.83	9.51	40.34	60.00	-19.66	peak	
6	*	21.2000	38.14	9.55	47.69	60.00	-12.31	peak	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	24°C	Relative Humidity	48%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11b/2437 MHz		

Phase: Neutral



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1521	41.50	8.76	50.26	65.88	-15.62	peak	
2		0.1724	38.61	9.50	48.11	64.84	-16.73	peak	
3		0.3488	32.91	7.80	40.71	58.99	-18.28	peak	
4		2.6690	29.44	9.37	38.81	56.00	-17.19	peak	
5		5.1500	30.75	9.51	40.26	60.00	-19.74	peak	
6	*	23.5499	38.05	9.57	47.62	60.00	-12.38	peak	



5 ANTENNA CONDUCTED SPURIOUS EMISSION

5.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Antenna conducted Spurious Emission	30-25000	20 dB less than the peak value of fundamental frequency

5.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-30	100854	Sep. 08, 2014

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

5.3 TEST PROCEDURES

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

5.4 TEST SETUP LAYOUT



5.5 DEVIATION FROM TEST STANDARD

No deviation

5.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.


**5.7 TEST RESULTS - 2400-2483.5 MHZ**

E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11b		


Channel of Worst Data			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2398.2	-32.42	2483.6	-46.77
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.			



IEEE 802.11b/The max. radio frequency power in any
100kHz bandwidth outside the frequency band

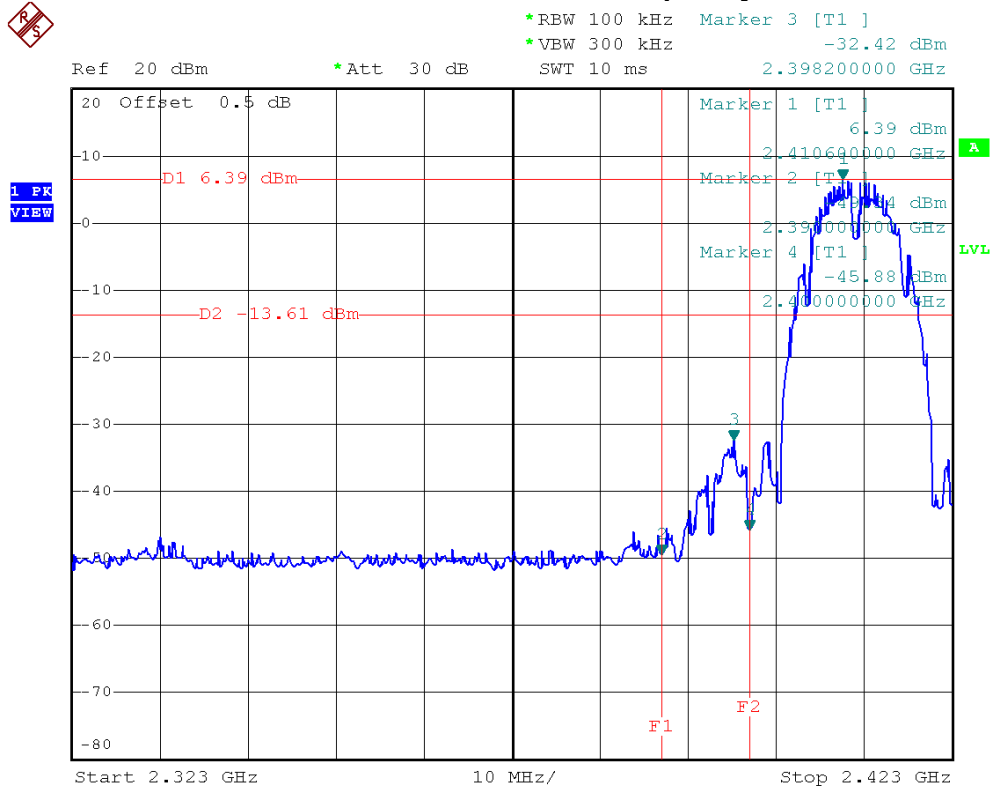


IEEE 802.11b/The max. radio frequency power in any
100 kHz bandwidth within the frequency band

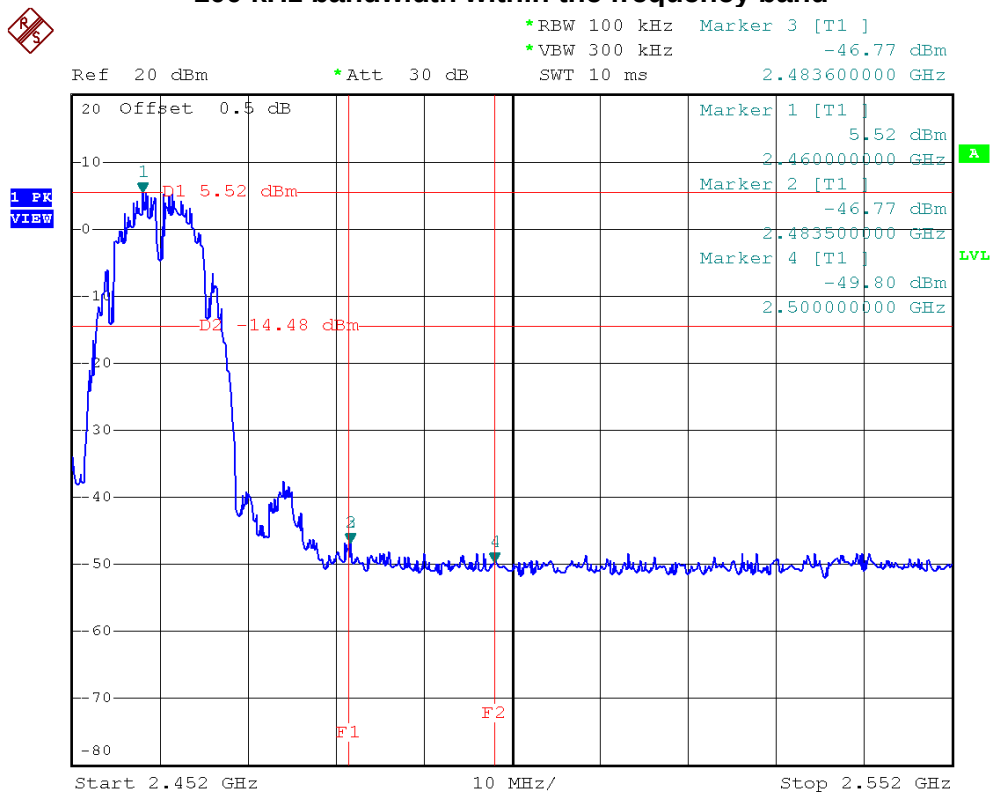




IEEE 802.11b/2412 MHz/10 Harmonic of the frequency

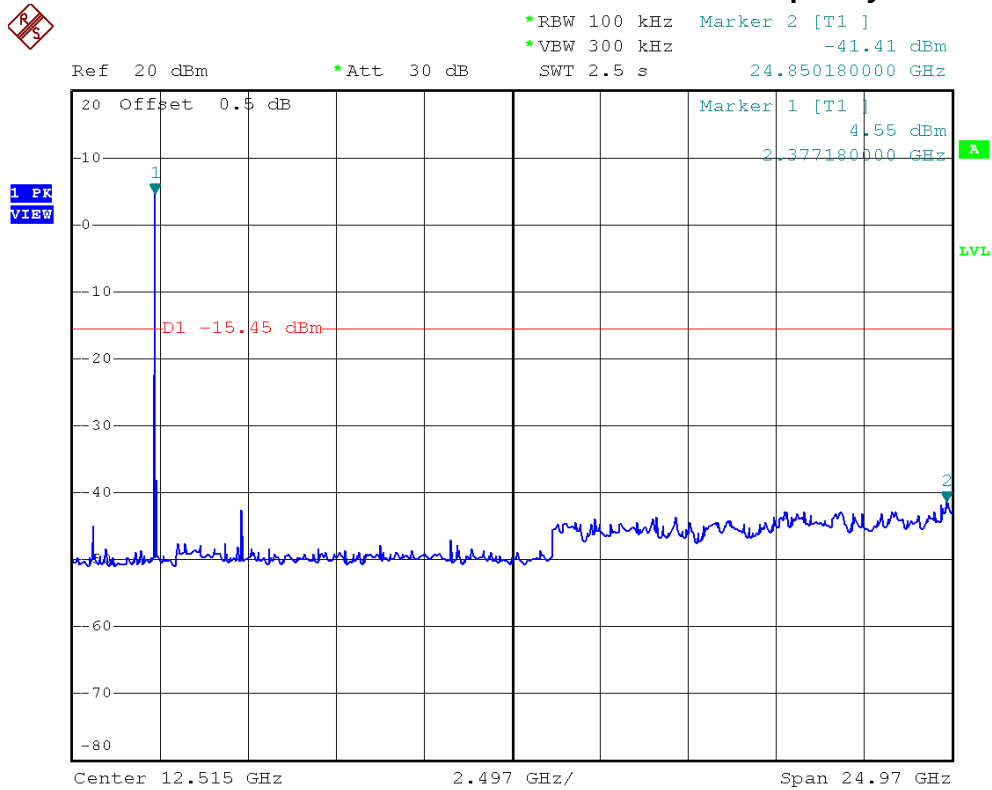

IEEE 802.11b/2437 MHz/10 Harmonic of the frequency

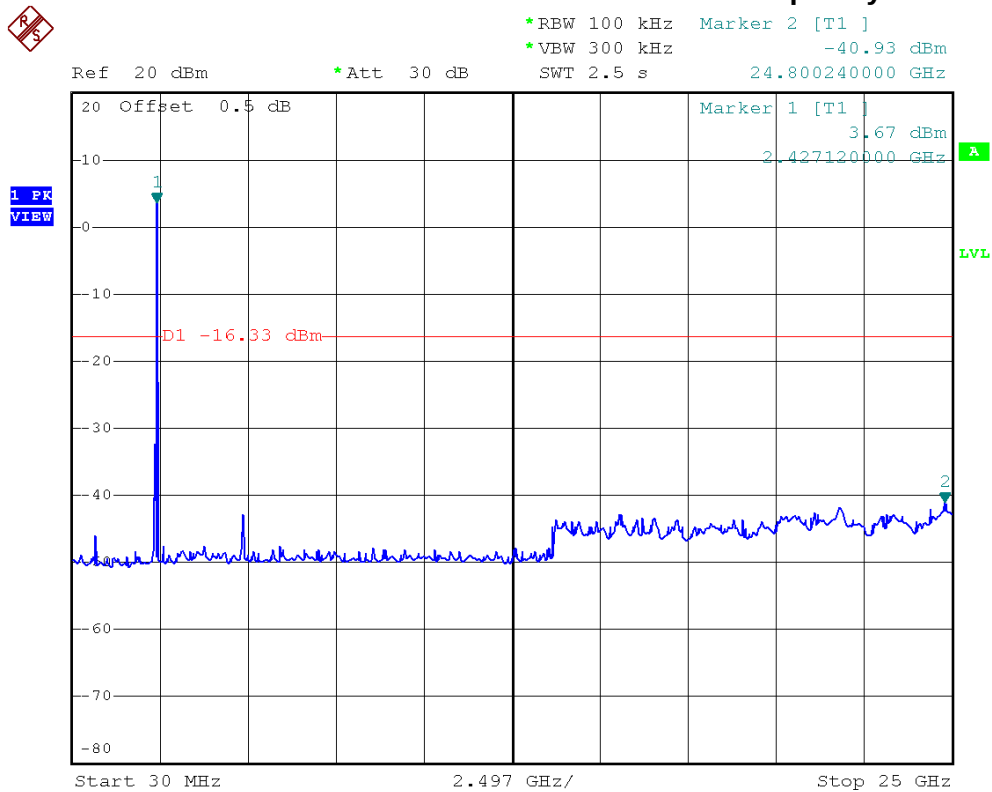




IEEE 802.11b/2462 MHz/10 Harmonic of the frequency



1 PK
VIEW

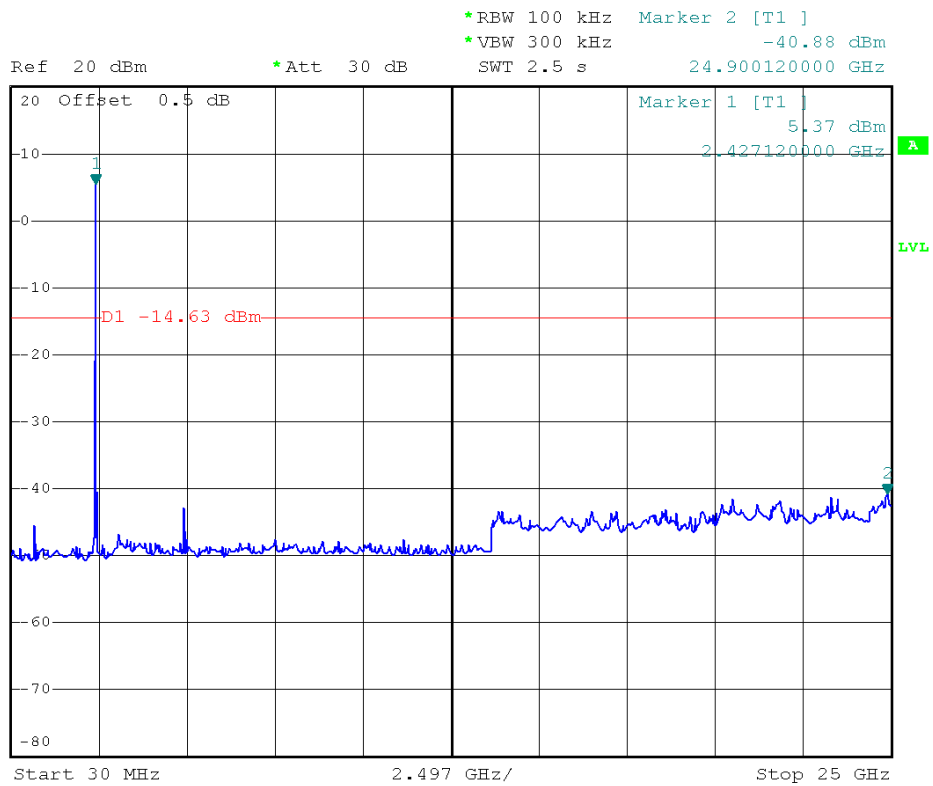




E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11g		


Channel of Worst Data			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2397.2	-30.25	2484.2	-44.8
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.			



IEEE 802.11g/The max. radio frequency power in any
100kHz bandwidth outside the frequency band

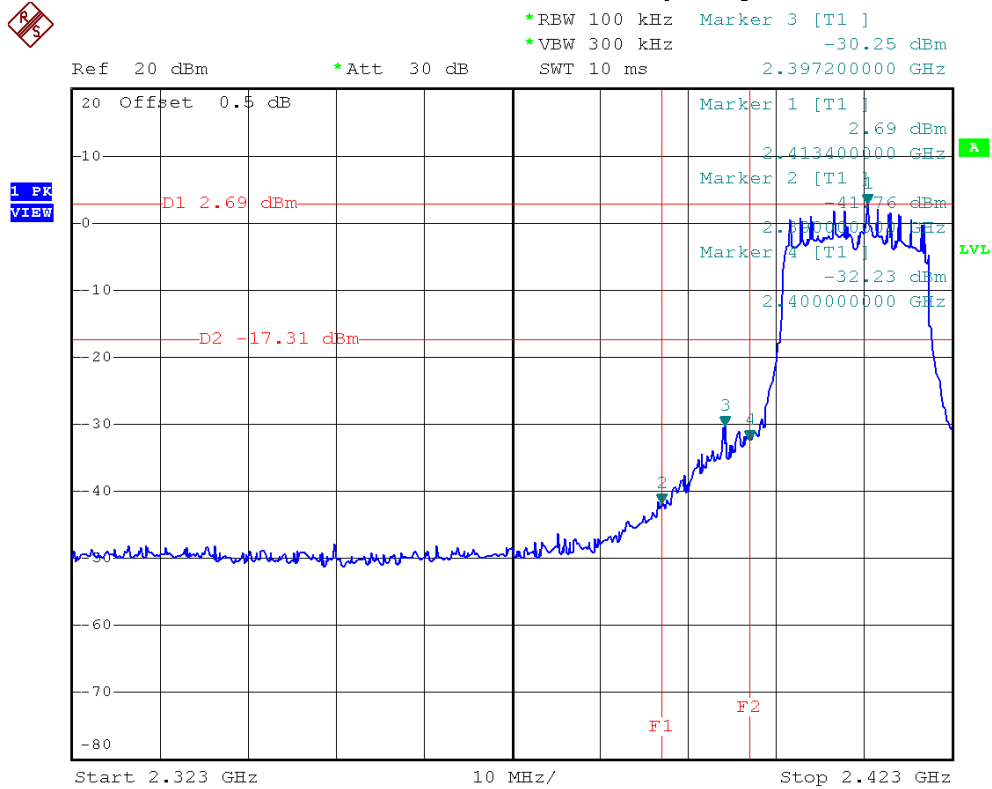


IEEE 802.11g/The max. radio frequency power in any
100 kHz bandwidth within the frequency band

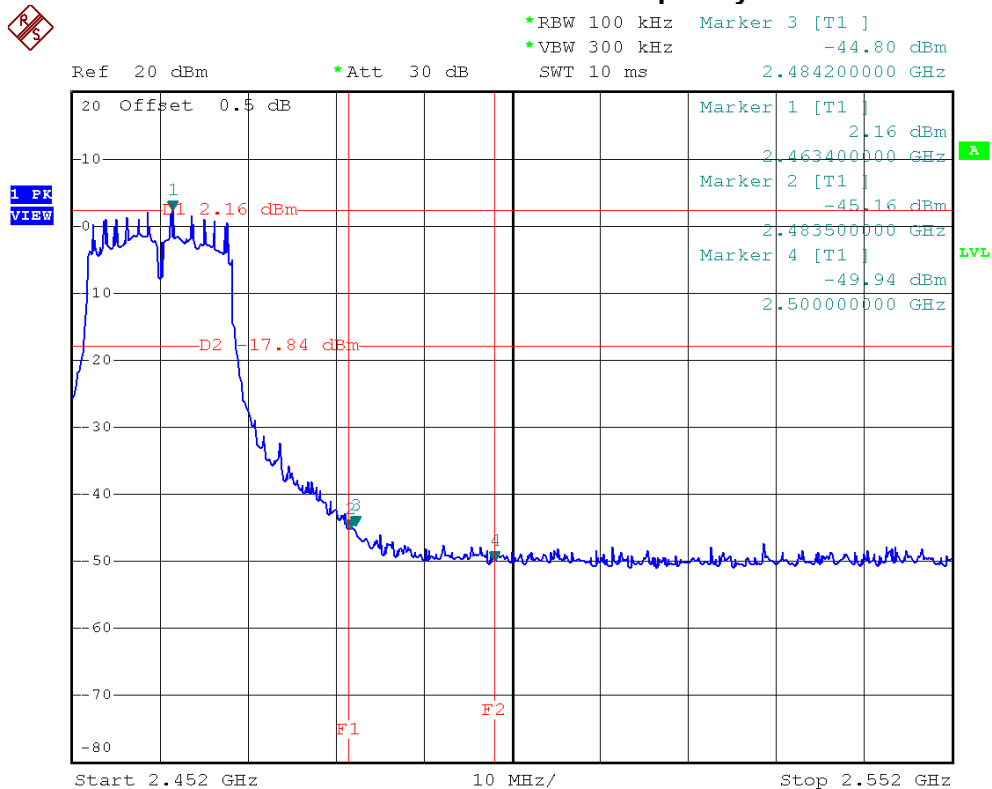




IEEE 802.11g/2412 MHz/10 Harmonic of the frequency

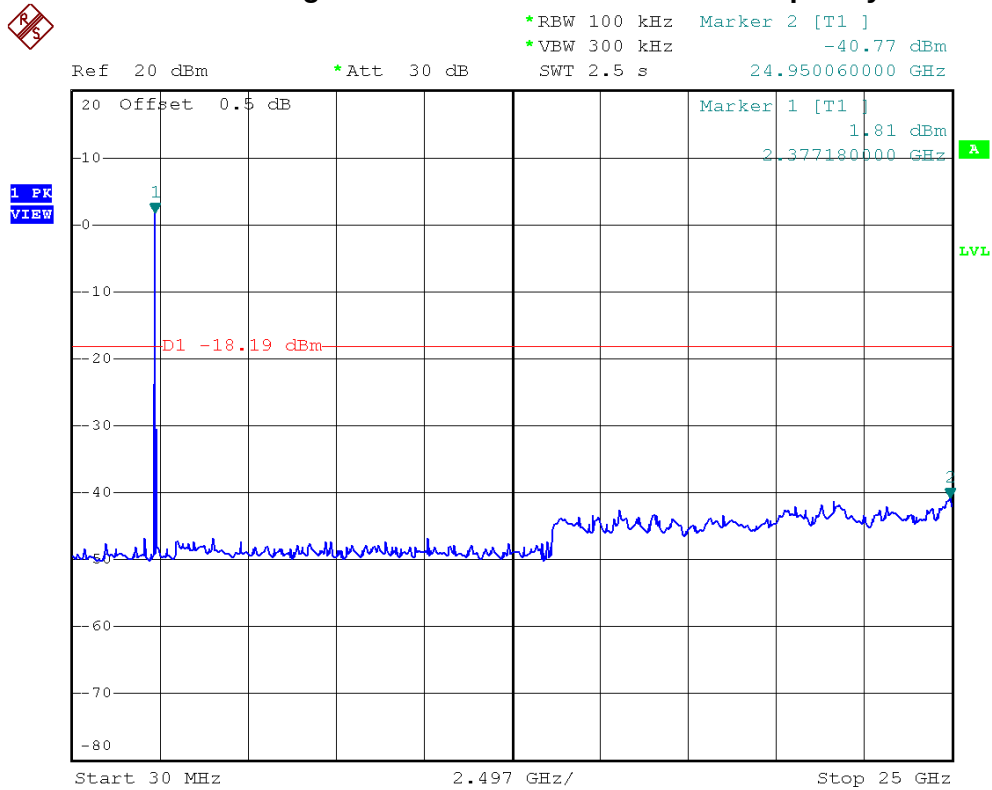

IEEE 802.11g/2437 MHz/10 Harmonic of the frequency

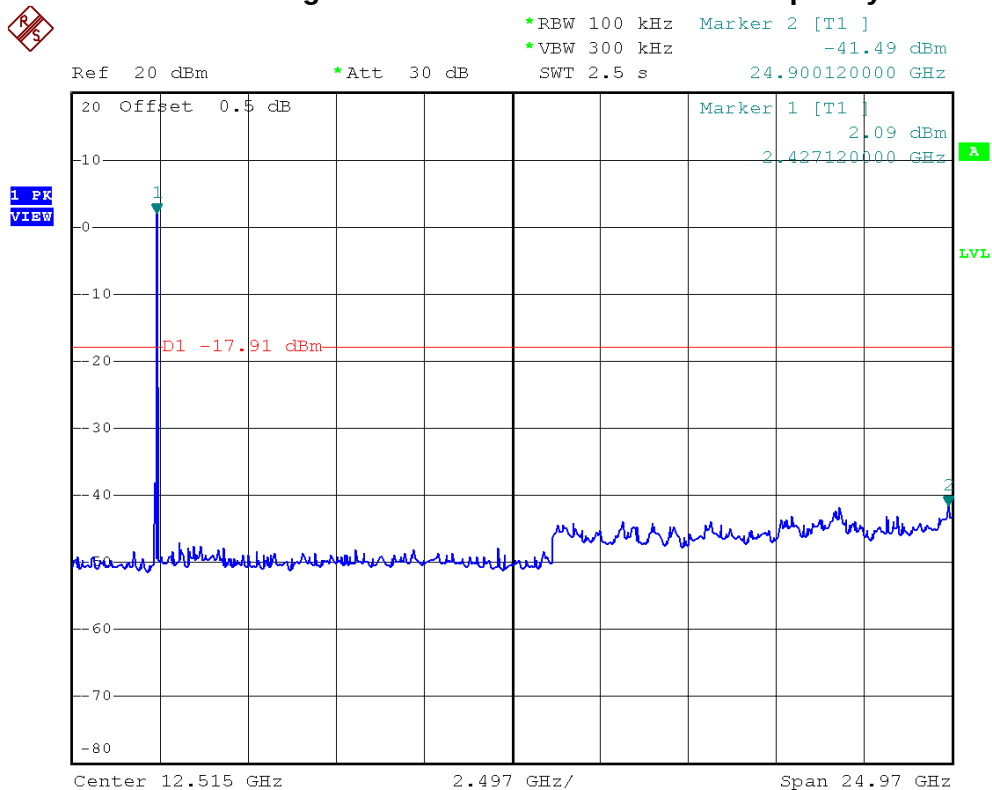




IEEE 802.11g/2462 MHz/10 Harmonic of the frequency



1 PK
VIEW

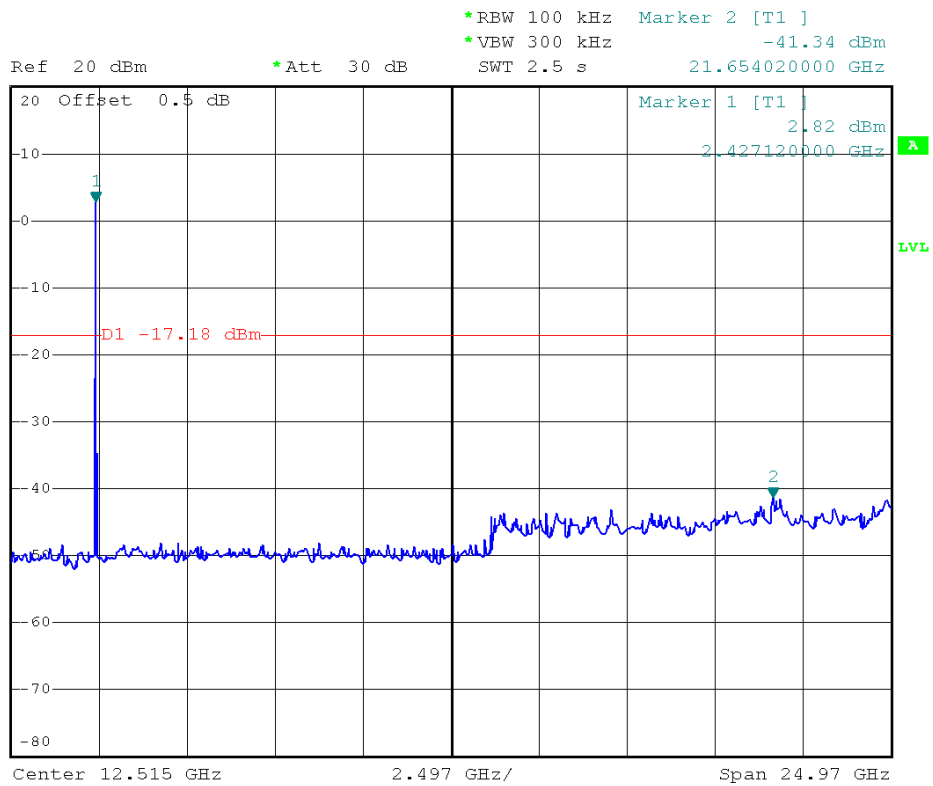




E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)		


Channel of Worst Data			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2397.2	-29.09	2483.8	-40.51
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.			



IEEE 802.11n (20 MHz)/The max. radio frequency power in any 100kHz bandwidth outside the frequency band

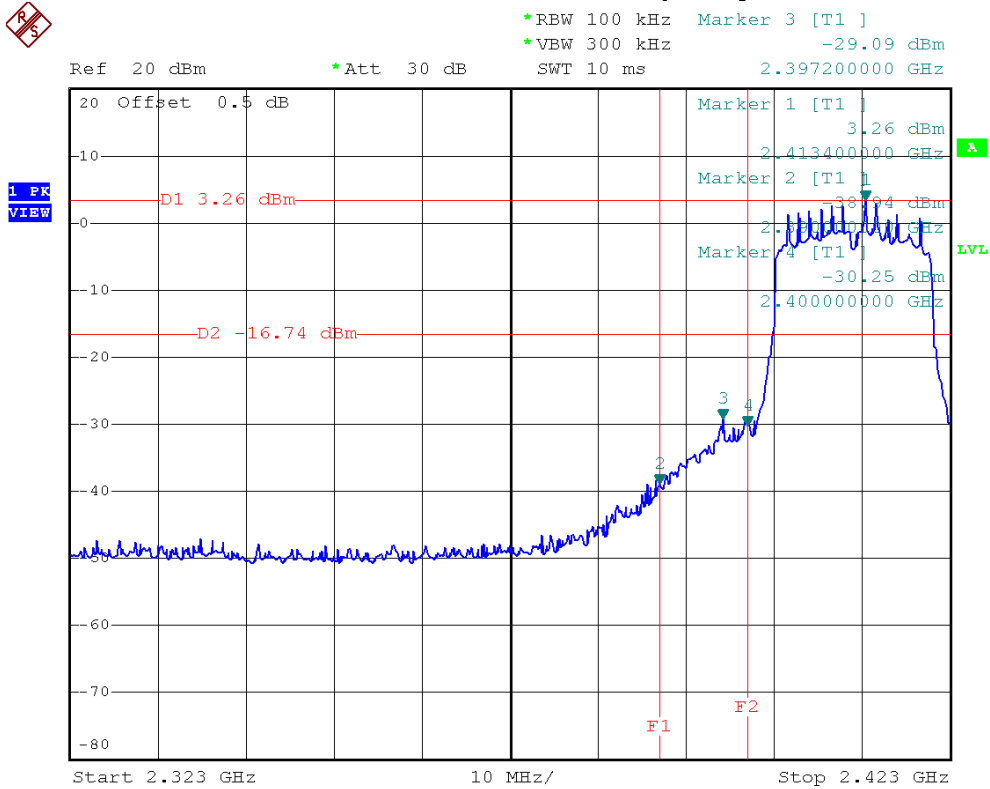

IEEE 802.11n (20 MHz)/The max. radio frequency power in any 100 kHz bandwidth within the frequency band

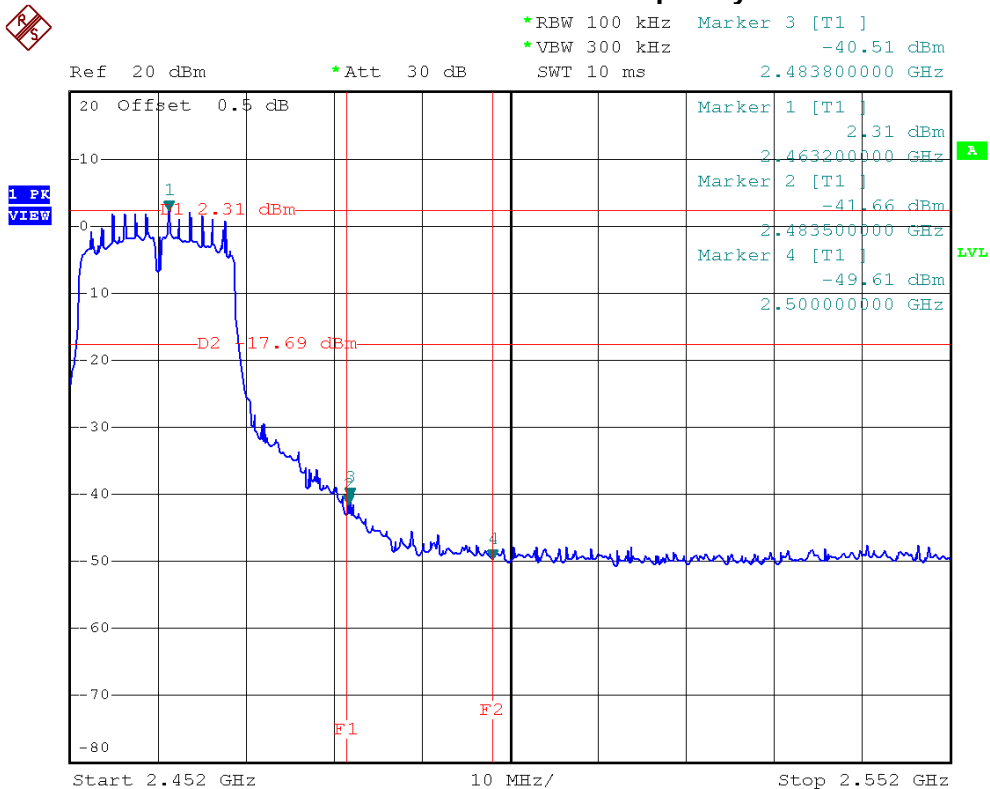



IEEE 802.11n (20 MHz)/2412 MHz/10 Harmonic of the frequency




*RBW 100 kHz Marker 2 [T1]
*VBW 300 kHz -40.98 dBm
SWT 2.5 s 21.703960000 GHz

Ref 20 dBm

*Att 30 dB

21.703960000 GHz

1 PK
VIEW

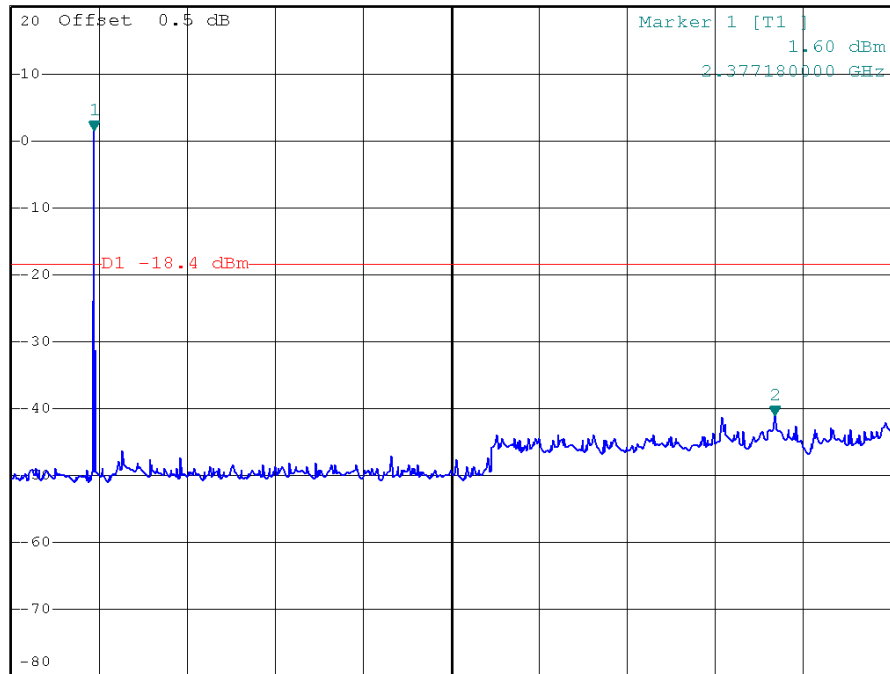

Center 12.515 GHz

2.497 GHz/

Span 24.97 GHz

IEEE 802.11n (20 MHz)/2437 MHz/10 Harmonic of the frequency




*RBW 100 kHz Marker 2 [T1]
*VBW 300 kHz -40.93 dBm
SWT 2.5 s 24.900120000 GHz

Ref 20 dBm

*Att 30 dB

24.900120000 GHz

1 PK
VIEW

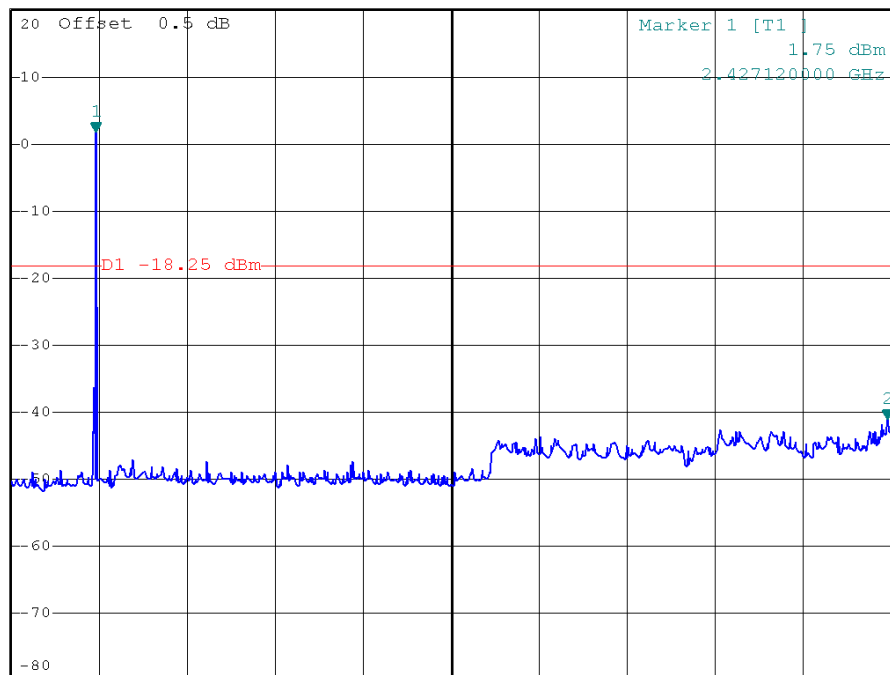

Center 12.515 GHz

2.497 GHz/

Span 24.97 GHz



IEEE 802.11n (20 MHz)/2462 MHz/10 Harmonic of the frequency




*RBW 100 kHz Marker 2 [T1]
*VBW 300 kHz -41.74 dBm
SWT 2.5 s 23.401920000 GHz

Ref 20 dBm

*Att 30 dB

23.401920000 GHz

1 PK
VIEW

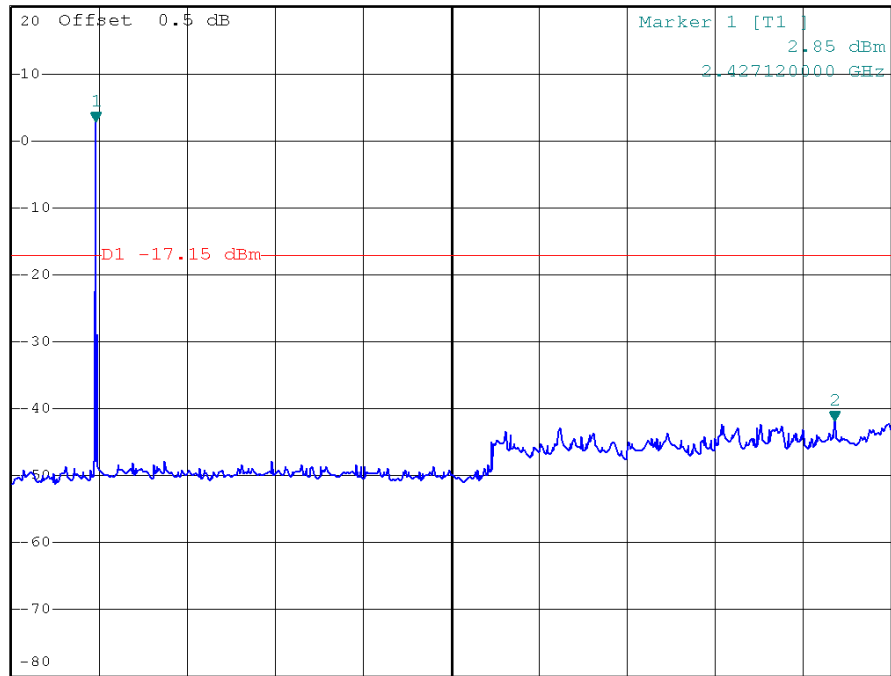

Center 12.515 GHz

2.497 GHz/

Span 24.97 GHz

**6.6 DB BANDWIDTH****6.1 LIMIT**

Test Item	Frequency Range (MHz)	Limit
Bandwidth	2400-2483.5	$\geq 500\text{KHz}$ (6dB bandwidth)

6.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-30	100854	Sep. 08, 2014

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

6.3 TEST PROCEDURES

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

6.4 TEST SETUP LAYOUT**6.5 DEVIATION FROM TEST STANDARD**

No deviation

6.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.




6.7 TEST RESULTS - 2400-2483.5 MHZ

E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11b/2412 MHz, 2437 MHz, 2462 MHz		


Frequency	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit	Result
2412 MHz	9.10	12.56	>=500 kHz	PASS
2437 MHz	9.10	12.44	>=500 kHz	PASS
2462 MHz	8.50	12.48	>=500 kHz	PASS

IEEE 802.11b/2412 MHz/6 dB and 99% Occupied Bandwidth

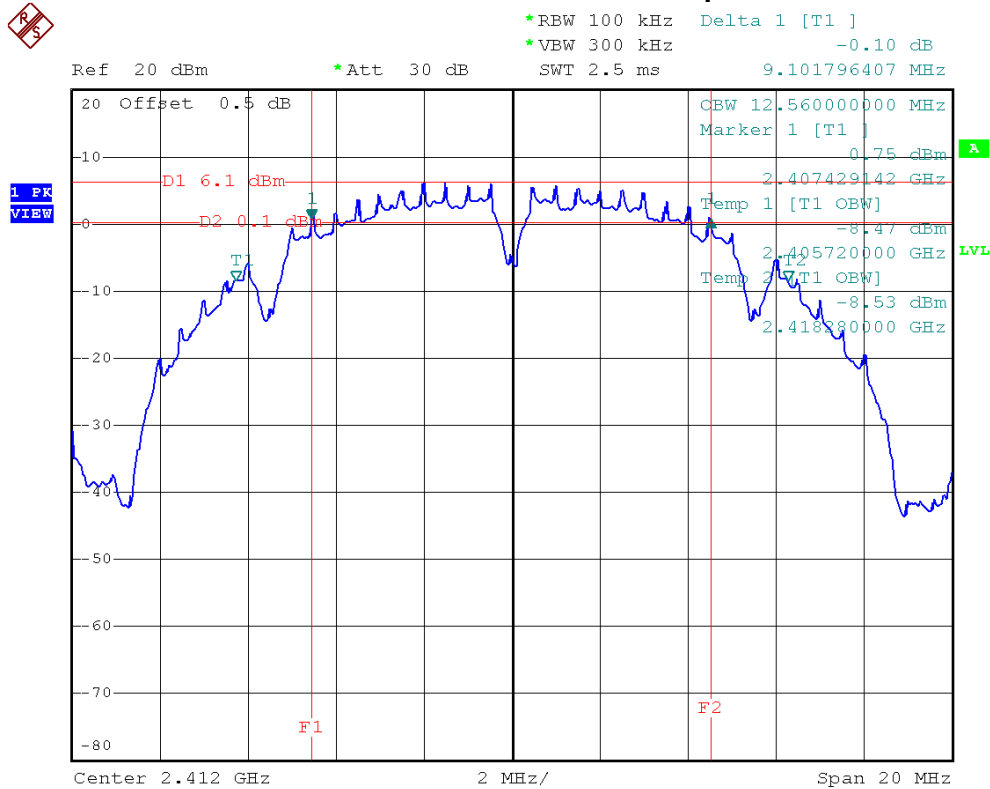




IEEE 802.11b/2437 MHz/6 dB and 99% Occupied Bandwidth

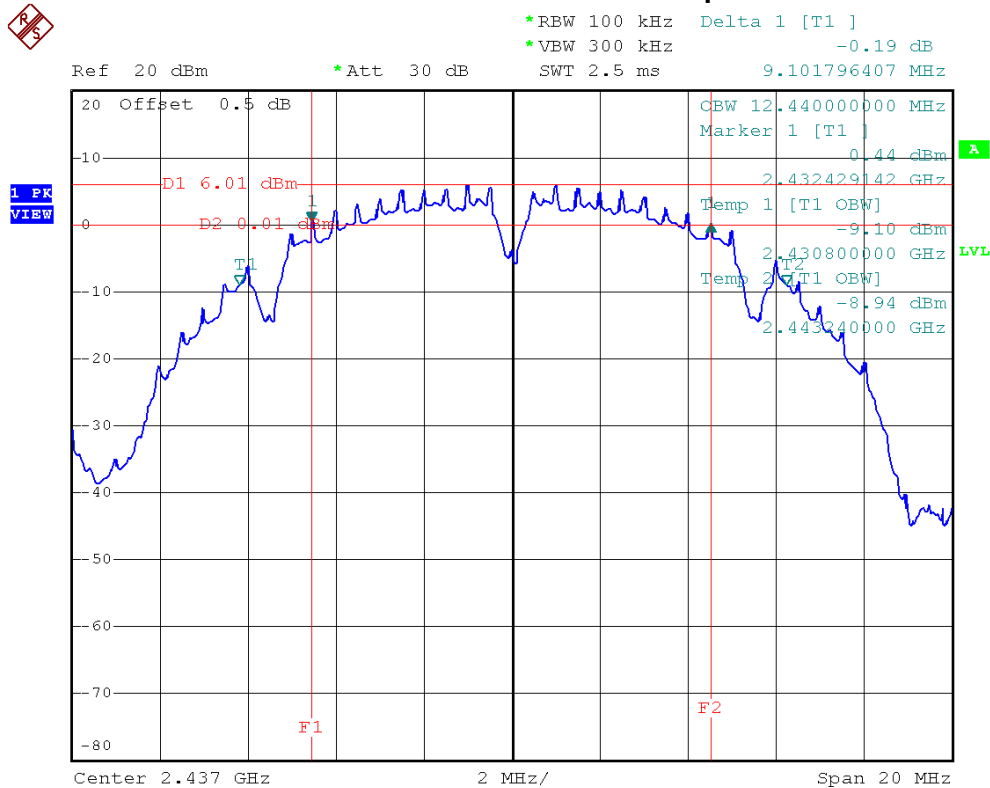


IEEE 802.11b/2462 MHz/6 dB and 99% Occupied Bandwidth

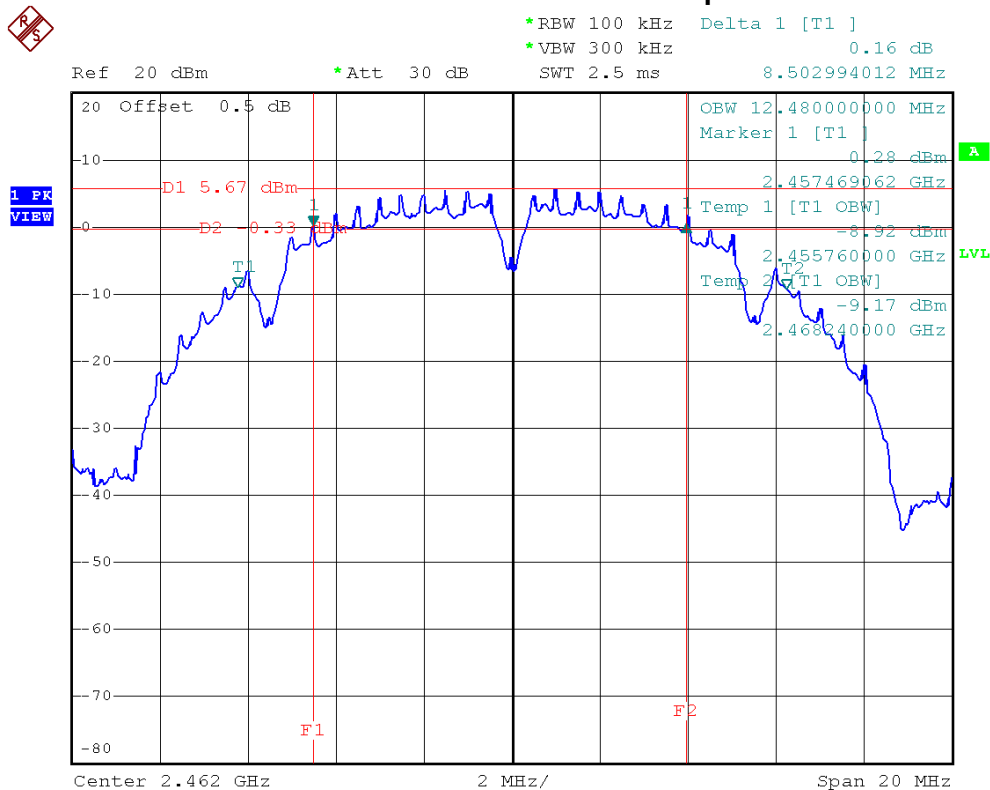




E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11g/2412 MHz, 2437 MHz, 2462 MHz		

Frequency	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit	Result
2412 MHz	15.12	16.36	>=500 kHz	PASS
2437 MHz	15.13	16.32	>=500 kHz	PASS
2462 MHz	15.25	16.40	>=500 kHz	PASS

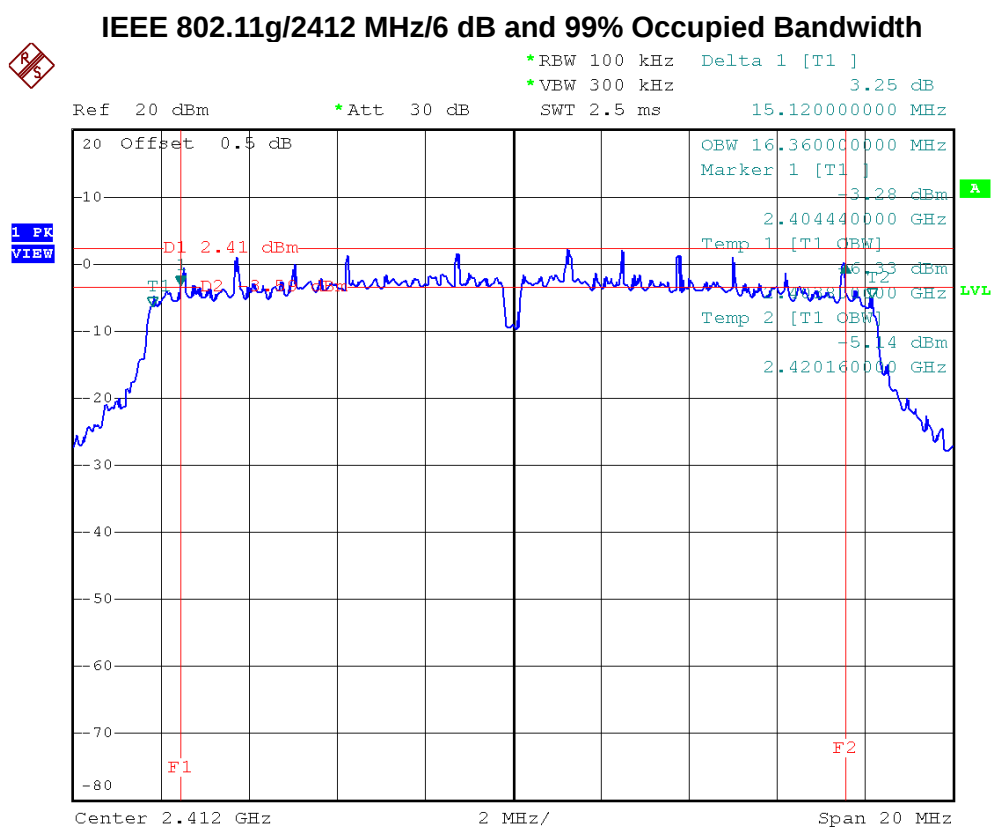




IEEE 802.11g/2437 MHz/6 dB and 99% Occupied Bandwidth

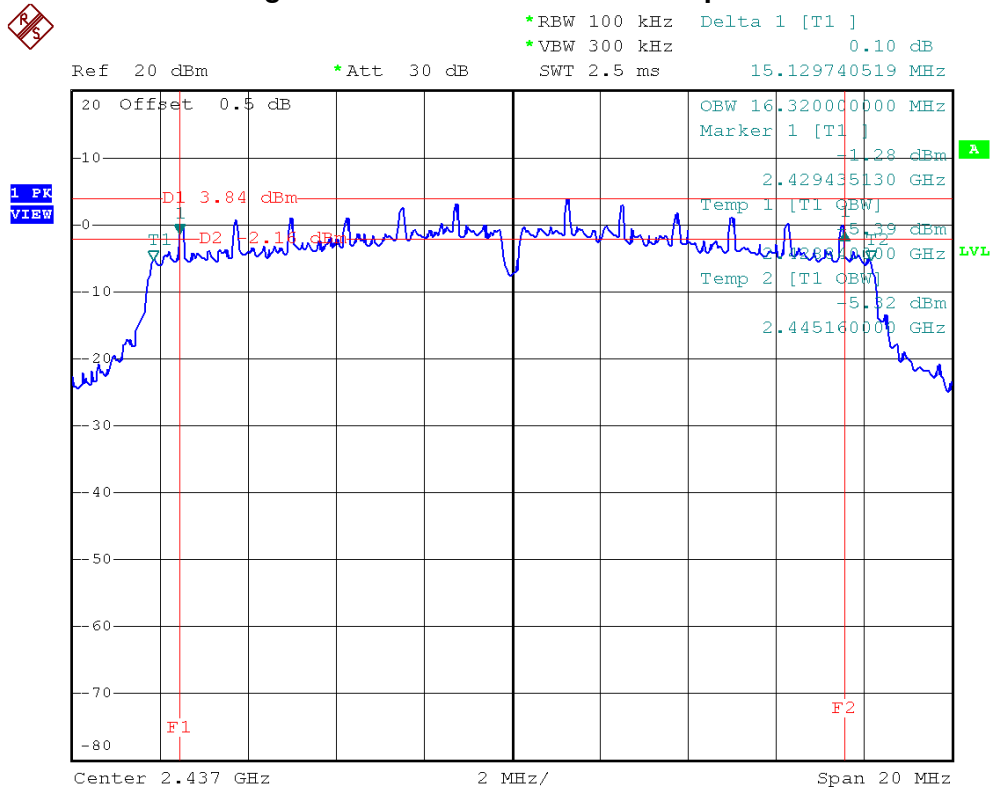

IEEE 802.11g/2462 MHz/6 dB and 99% Occupied Bandwidth

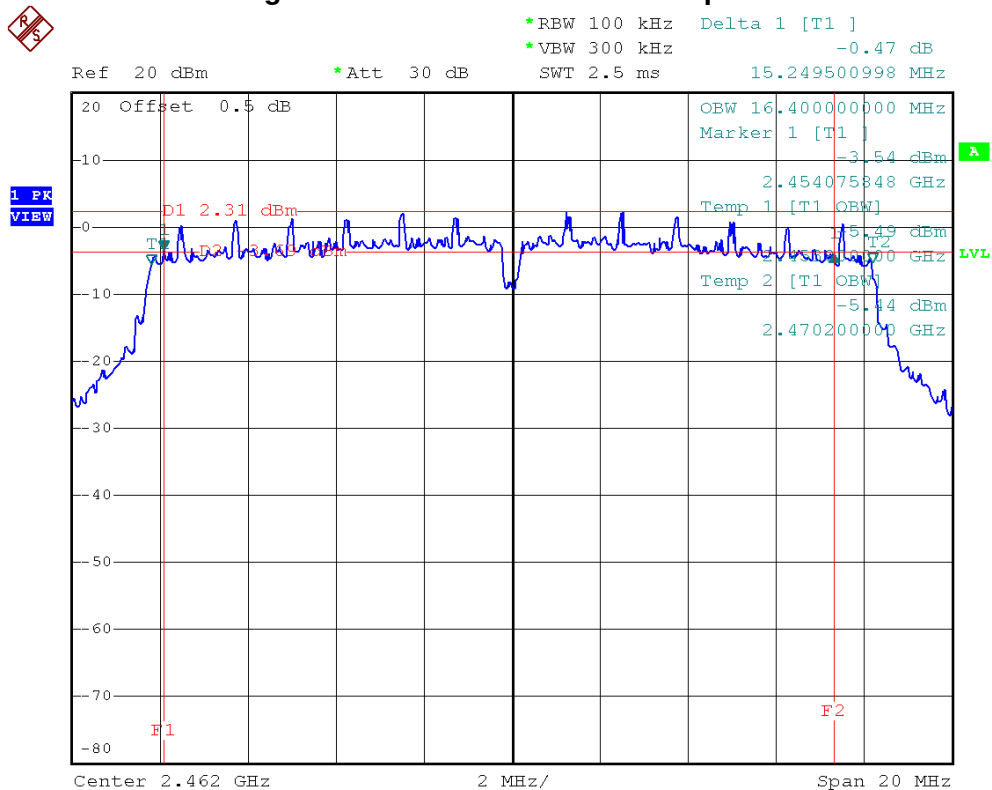




E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/2412 MHz, 2437 MHz, 2462 MHz		


Frequency	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit	Result
2412 MHz	15.13	17.52	>=500 kHz	PASS
2437 MHz	15.13	17.60	>=500 kHz	PASS
2462 MHz	15.05	17.52	>=500 kHz	PASS

IEEE 802.11n (20 MHz)/2412 MHz/6 dB and 99% Occupied Bandwidth

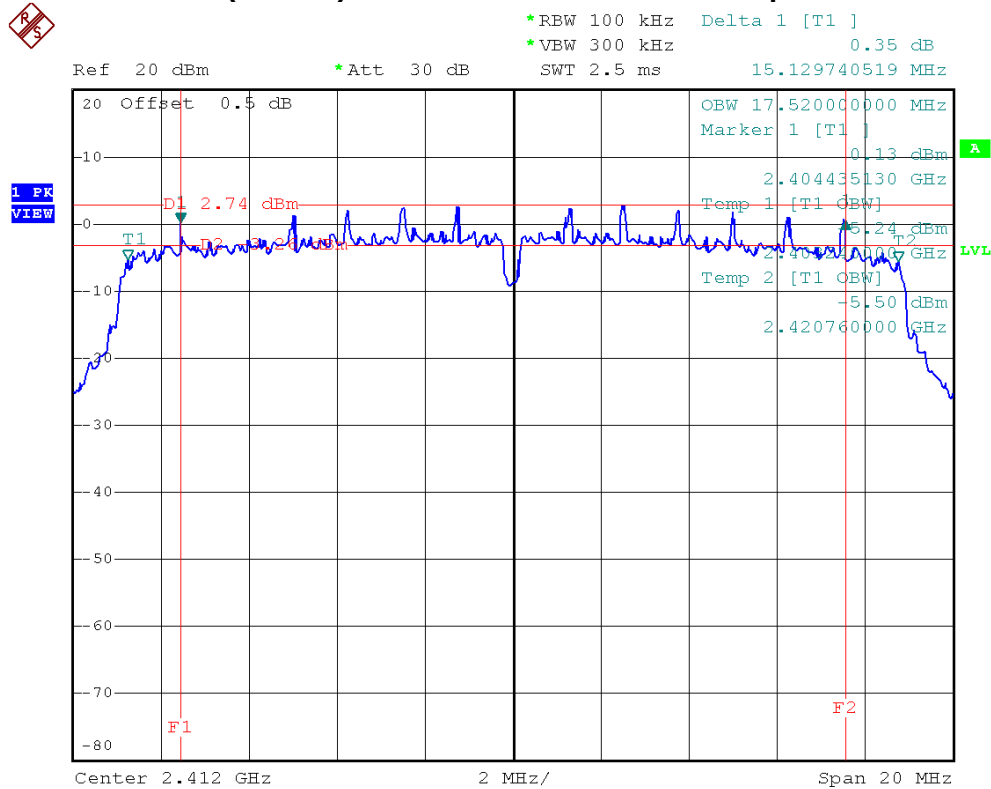




IEEE 802.11n (20 MHz)/2437 MHz/6 dB and 99% Occupied Bandwidth

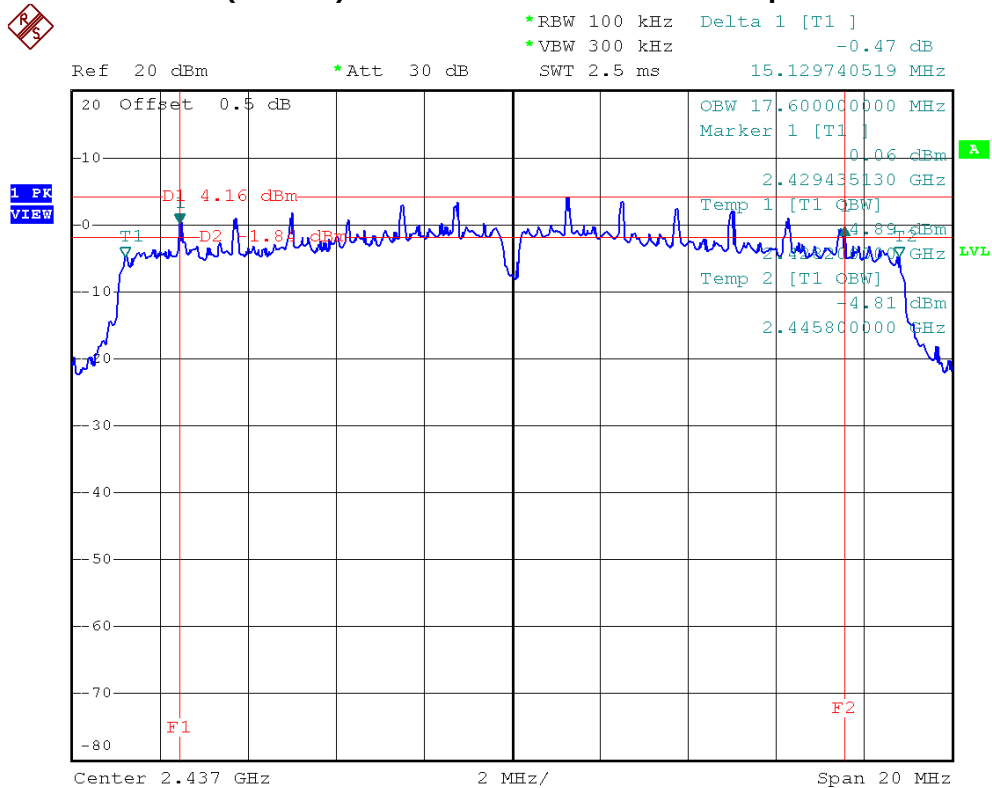

IEEE 802.11n (20 MHz)/2462 MHz/6 dB and 99% Occupied Bandwidth

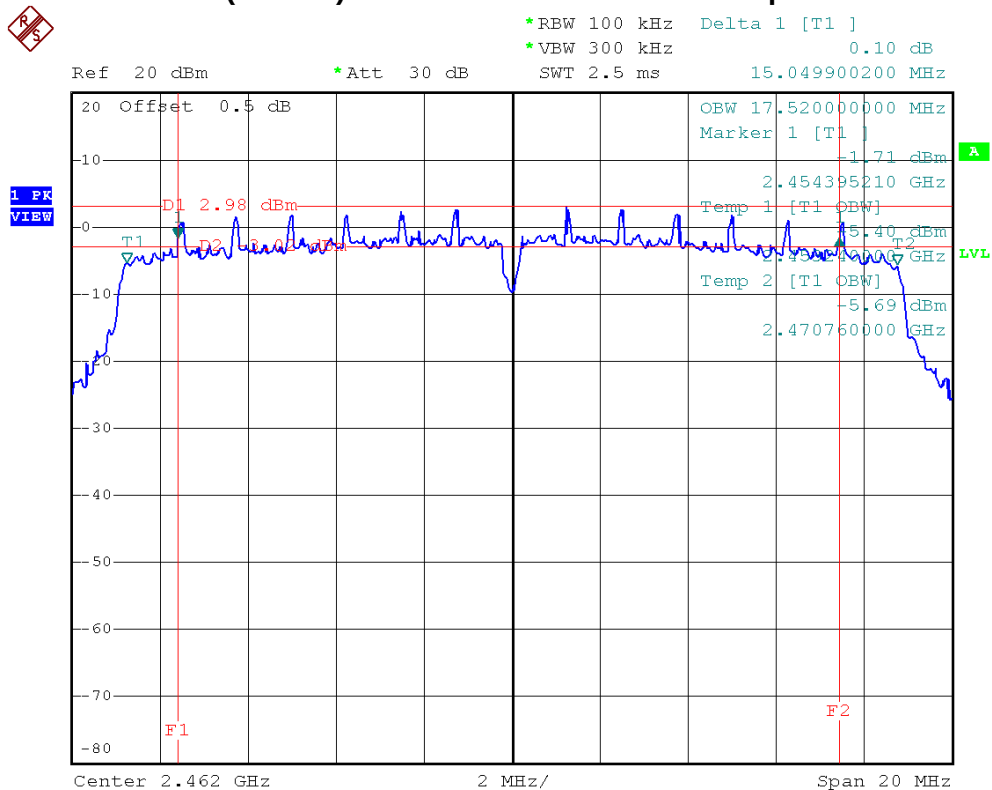



7 MAXIMUM PEAK CONDUCTED OUTPUT POWER

7.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Maximum Peak Conducted Output Power	2400-2483.5	1 watt or 30 dBm

7.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-30	100854	Sep. 08, 2014

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

7.3 TEST PROCEDURES

The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.

7.4 TEST SETUP LAYOUT



7.5 DEVIATION FROM TEST STANDARD

No deviation

7.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.

**7.7 TEST RESULTS - 2400-2483.5 MHZ**

E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11b/2412 MHz, 2437 MHz, 2462 MHz		

Frequency	Peak Output Power (dBm)	LIMIT (dBm)	Result
2412 MHz	18.12	30	PASS
2437 MHz	18.39	30	PASS
2462 MHz	17.90	30	PASS



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11g/2412 MHz, 2437 MHz, 2462 MHz		

Frequency	Peak Output Power (dBm)	LIMIT (dBm)	Result
2412 MHz	22.11	30	PASS
2437 MHz	21.21	30	PASS
2462 MHz	21.00	30	PASS



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/2412 MHz, 2437 MHz, 2462 MHz		

Frequency	Peak Output Power (dBm)	LIMIT (dBm)	Result
2412 MHz	21.45	30	PASS
2437 MHz	22.25	30	PASS
2462 MHz	20.88	30	PASS



8 RADIATED SPURIOUS EMISSION (9 KHZ TO 1 GHZ)

8.1 LIMIT

20 dB in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency Range: 9 kHz to 1 GHz		
FREQUENCY (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequency Range: above 1 GHz				
FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
above 1 GHz	80	60	74	54

NOTE:

1. The limit for radiated test was performed according to FCC PART 15B.
2. The tighter limit applies at the band edges.
3. Emission level (dBuV/m)=20log Emission level (uV/m).
4. The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain(if use)
 Margin Level = Measurement Value – Limit Value



8.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-30	100854	Sep. 08, 2014
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Apr. 15, 2014
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 16, 2014
4	Microflex Cable	Harbour industries	27478LL142	1m	May. 13, 2014
5	Microflex Cable	EMC	S104-SMA	8m	May. 13, 2014
6	Microflex Cable	Harbour industries	27478LL142	3m	May. 13, 2014
7	Test Cable	LMR	LMR-400	12m	May. 14, 2014
8	Test Cable	LMR	LMR-400	3m	May. 14, 2014
9	Pre-Amplifier	Anritsu	MH648A	M92649	Jun. 18, 2014
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 11, 2014
11	Preamplifier With Adaptor	EMC	EMC2654045	980030	Feb. 18, 2014
12	Horn Antenna	Schwarzbeck	BBHA 9170	187	Dec. 24, 2013

Remark: "N/A" denotes No Model Name, No Serial No. or No Calibration specified.

8.3 MEASURING INSTRUMENTS SETTING

EMI Test Receiver	Parameter Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



8.4 TEST PROCEDURES

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1 GHz. For frequencies above 1 GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m Semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
- The testing follows the guidelines in ANSI C63.4 and FCC Public Notice DA 00-705 Measurement Guidelines. In case the emission is fail due to the used RBW/VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.


NOTE:

- Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode with Detector BW=120 kHz; SPA setting in RBW=100 kHz, VBW =100 kHz, Swp. Time = 0.3 sec./ MHz.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.

8.5 DEVIATION FROM TEST STANDARD

No deviation

8.6 TEST SETUP LAYOUT

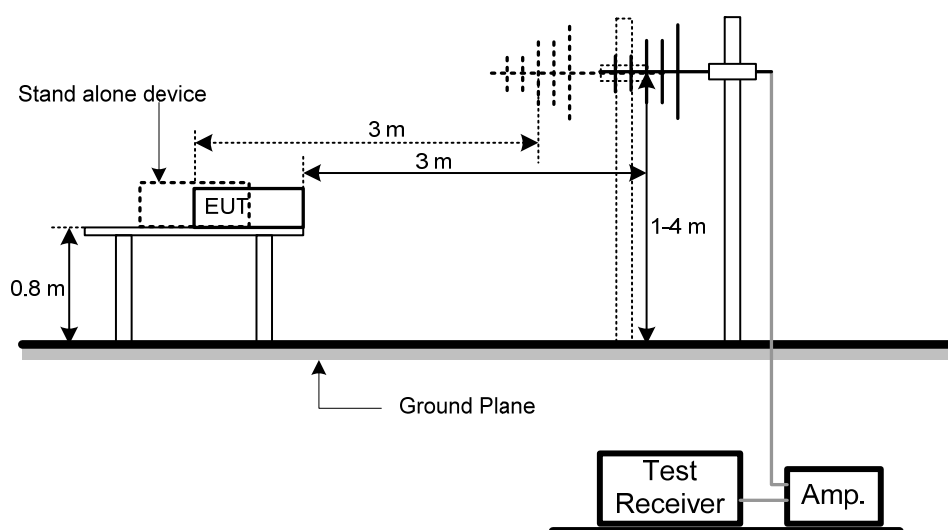



8.7 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.



8.8 TEST RESULTS - 2400-2483.5 MHZ

E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11b/2437 MHz		

Polarization: Vertical

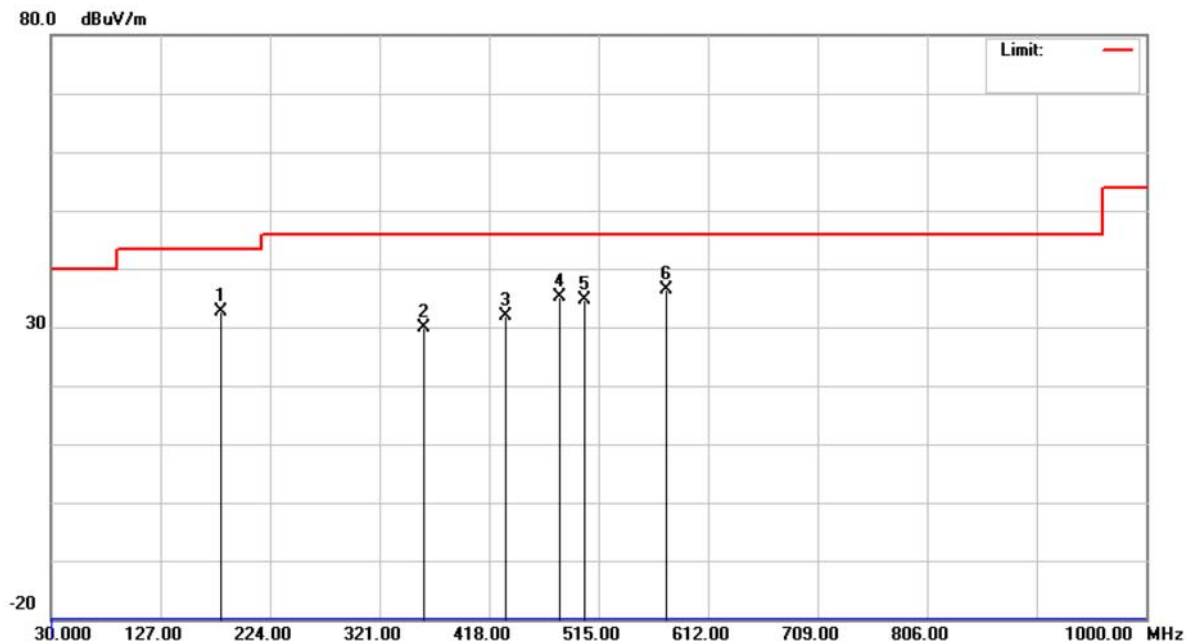


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		180.3500	48.46	-15.94	32.52	43.50	-10.98	peak	
2		359.7999	42.31	-12.37	29.94	46.00	-16.06	peak	
3		432.5499	42.19	-10.26	31.93	46.00	-14.07	peak	
4		481.0499	44.60	-9.59	35.01	46.00	-10.99	peak	
5		502.8750	44.07	-9.42	34.65	46.00	-11.35	peak	
6	*	575.6250	43.88	-7.47	36.41	46.00	-9.59	peak	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11b/2437 MHz		

Polarization: Horizontal

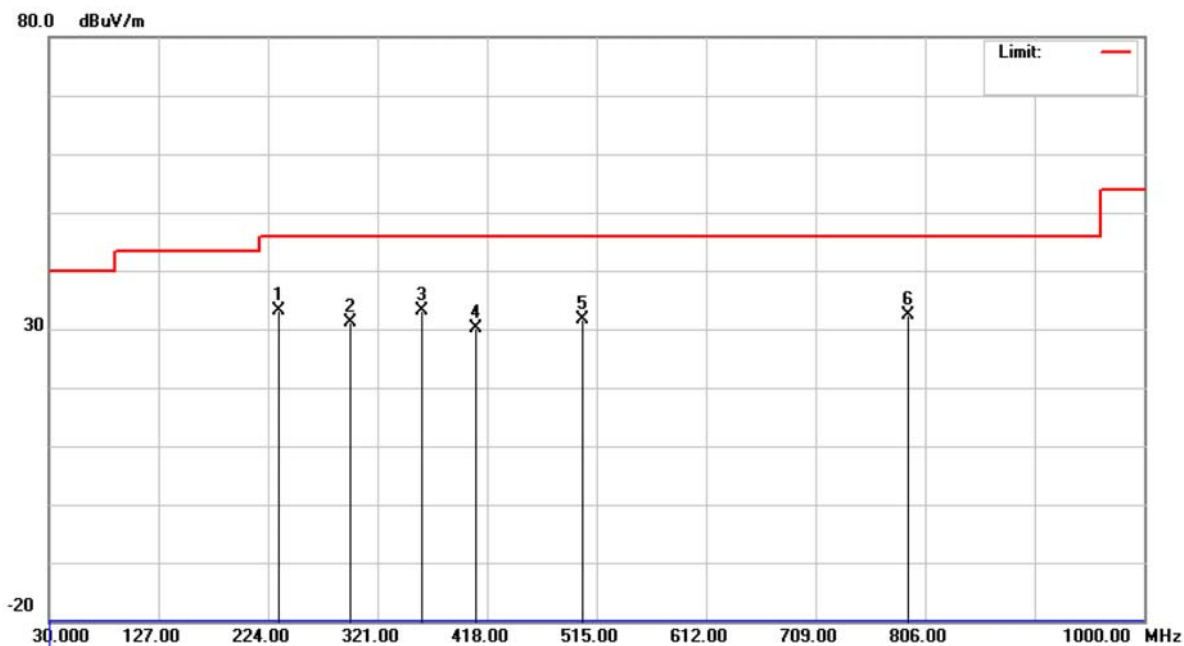

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	233.6999	49.08	-15.99	33.09	46.00	-12.91	peak	
2		296.7500	45.27	-14.03	31.24	46.00	-14.76	peak	
3		359.7999	45.46	-12.37	33.09	46.00	-12.91	peak	
4		408.2999	41.16	-10.95	30.21	46.00	-15.79	peak	
5		502.8750	41.05	-9.42	31.63	46.00	-14.37	peak	
6		791.4500	37.20	-4.93	32.27	46.00	-13.73	peak	



9 RADIATED SPURIOUS EMISSION (ABOVE 1 GHz)

9.1 LIMIT

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency Range: 9 kHz to 1 GHz		
FREQUENCY (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequency Range: above 1 GHz				
FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
above 1 GHz	80	60	74	54

NOTE:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain(if use)
 Margin Level = Measurement Value – Limit Value



9.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-30	100854	Sep. 08, 2014
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Apr. 15, 2014
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 16, 2014
4	Microflex Cable	Harbour industries	27478LL142	1m	May. 13, 2014
5	Microflex Cable	EMC	S104-SMA	8m	May. 13, 2014
6	Microflex Cable	Harbour industries	27478LL142	3m	May. 13, 2014
7	Test Cable	LMR	LMR-400	12m	May. 14, 2014
8	Test Cable	LMR	LMR-400	3m	May. 14, 2014
9	Pre-Amplifier	Anritsu	MH648A	M92649	Jun. 18, 2014
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 11, 2014
11	Preamplifier With Adaptor	EMC	EMC2654045	980030	Feb. 18, 2014
12	Horn Antenna	Schwarzbeck	BBHA 9170	187	Dec. 24, 2013

Remark: "N/A" denotes No Model Name, No Serial No. or No Calibration specified.

9.3 MEASURING INSTRUMENTS SETTING

Spectrum Analyzer	Parameter Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (other emission)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

9.4 TEST PROCEDURES

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m Semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
- The testing follows the guidelines in ANSI C63.4 and FCC Public Notice DA 00-705 Measurement Guidelines. In case the emission is fail due to the used RBW/VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.


NOTE:

- Reading in which marked as Peak means measurements by using are Peak Mode with instrument setting in RBW= 1 MHz, VBW= 1 MHz, Swp. Time = Auto.
Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW= 1 MHz, VBW= 10 Hz, Swp. Time = Auto.
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform.

9.5 DEVIATION FROM TEST STANDARD

No deviation

9.6 TEST SETUP LAYOUT

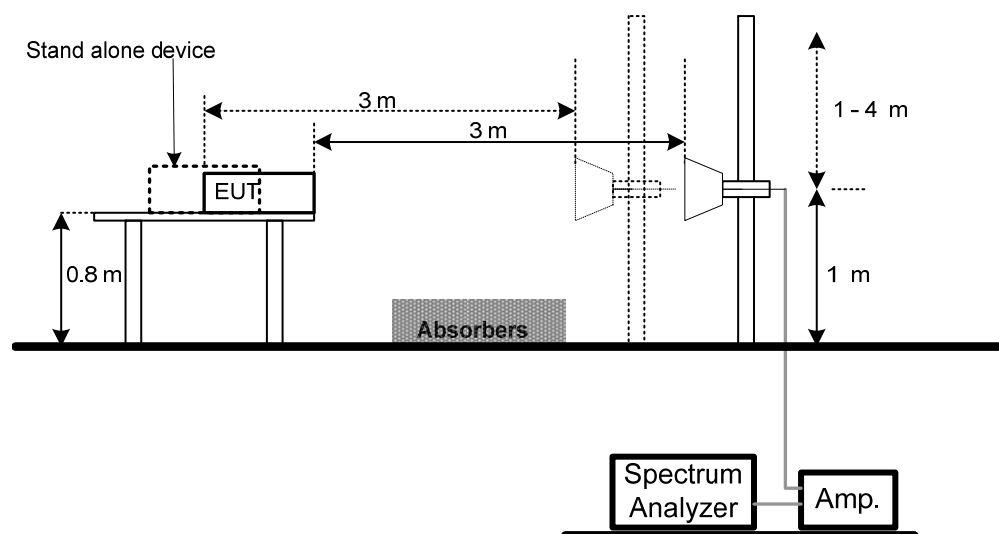



9.7 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.



9.8 TEST RESULTS - 2400-2483.5 MHZ

E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11b/2412 MHz		

Polarization: Vertical

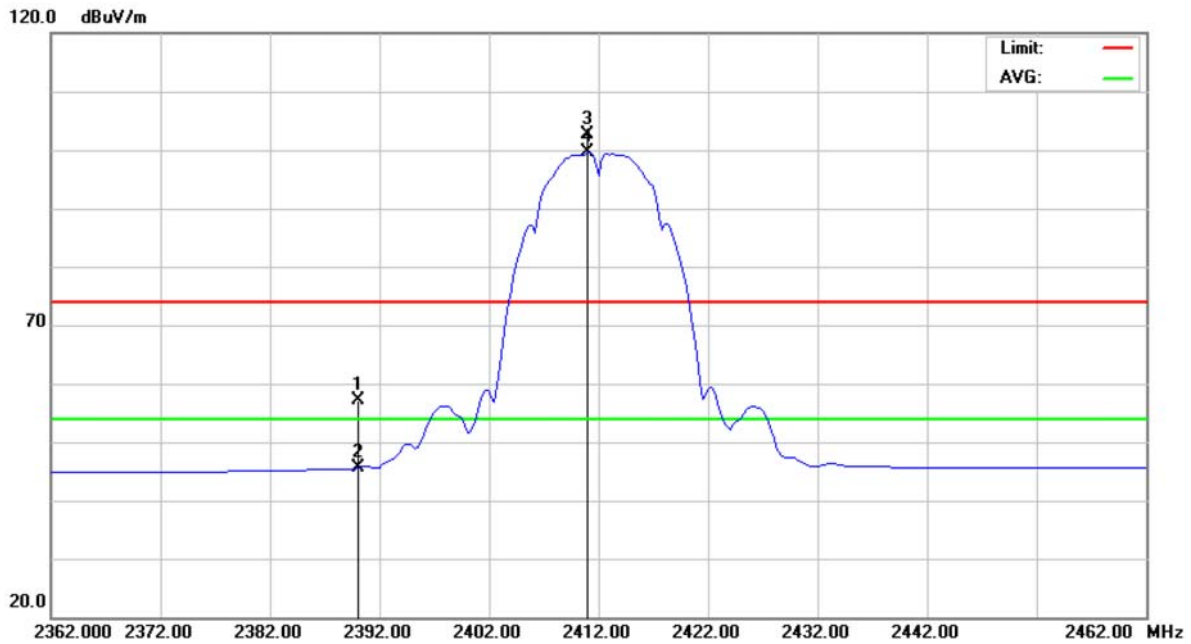


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	25.48	31.67	57.15	74.00	-16.85	peak	
2		2390.000	13.91	31.67	45.58	54.00	-8.42	AVG	
3	X	2411.000	70.97	31.76	102.73	74.00	28.73	peak	
4	*	2411.000	67.77	31.76	99.53	54.00	45.53	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11b/2412 MHz		

Polarization: Vertical

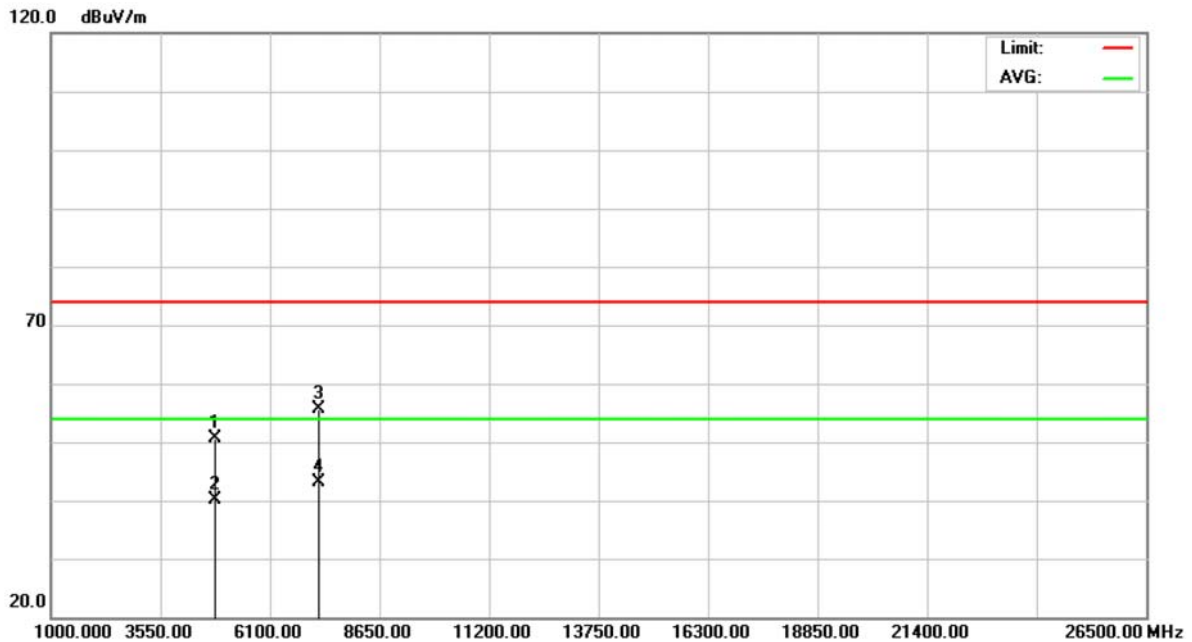


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4823.990	44.85	5.71	50.56	74.00	-23.44	peak	
2		4823.990	34.54	5.71	40.25	54.00	-13.75	AVG	
3		7236.310	43.35	12.29	55.64	74.00	-18.36	peak	
4	*	7236.310	30.74	12.29	43.03	54.00	-10.97	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11b/2412 MHz		

Polarization: Horizontal

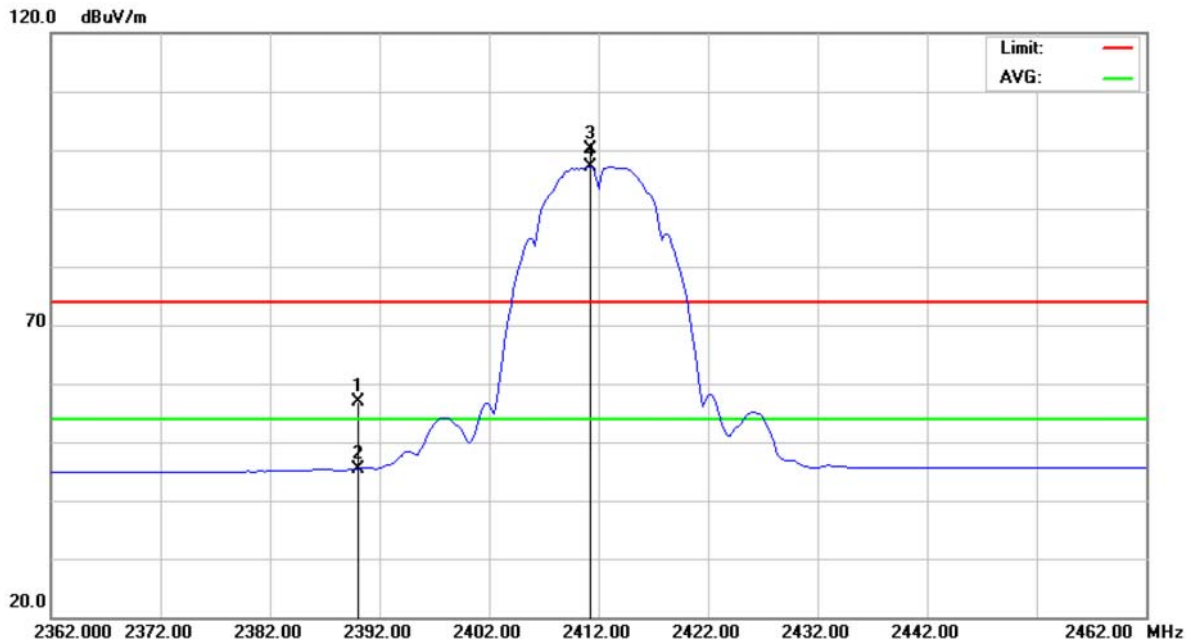


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	25.17	31.67	56.84	74.00	-17.16	peak	
2		2390.000	13.72	31.67	45.39	54.00	-8.61	AVG	
3	X	2411.250	68.45	31.76	100.21	74.00	26.21	peak	
4	*	2411.250	65.45	31.76	97.21	54.00	43.21	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11b/2412 MHz		

Polarization: Horizontal

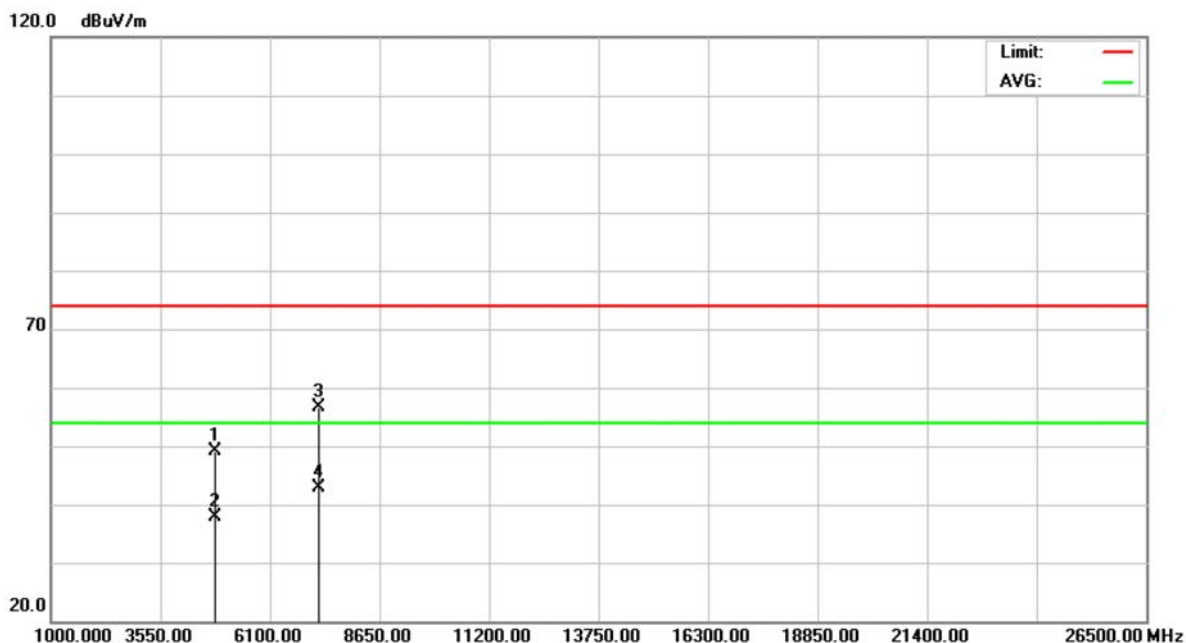


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4823.910	43.54	5.71	49.25	74.00	-24.75	peak	
2		4823.910	32.10	5.71	37.81	54.00	-16.19	AVG	
3		7235.805	44.39	12.29	56.68	74.00	-17.32	peak	
4	*	7235.805	30.62	12.29	42.91	54.00	-11.09	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11b/2437 MHz		

Polarization: Vertical

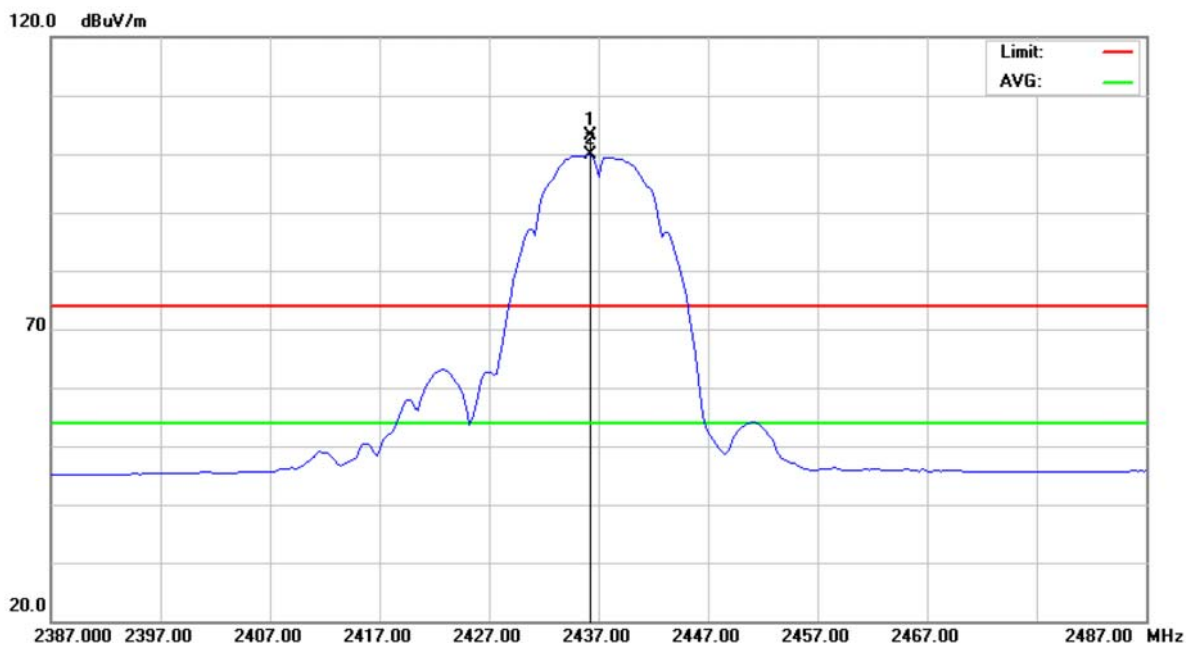


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2436.250	71.23	31.87	103.10	74.00	29.10	peak	
2	*	2436.250	68.07	31.87	99.94	54.00	45.94	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11b/2437 MHz		

Polarization: Vertical

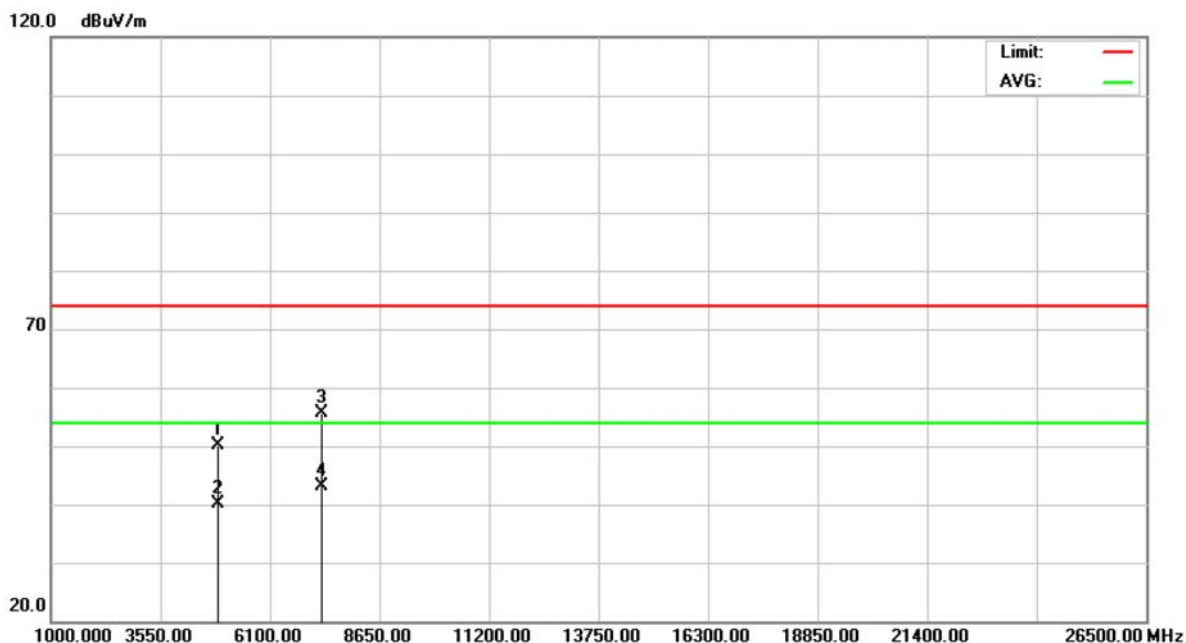


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4873.940	44.44	5.78	50.22	74.00	-23.78	peak	
2		4873.940	34.30	5.78	40.08	54.00	-13.92	AVG	
3		7310.820	42.96	12.57	55.53	74.00	-18.47	peak	
4	*	7310.820	30.63	12.57	43.20	54.00	-10.80	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11b/2437 MHz		

Polarization: Horizontal

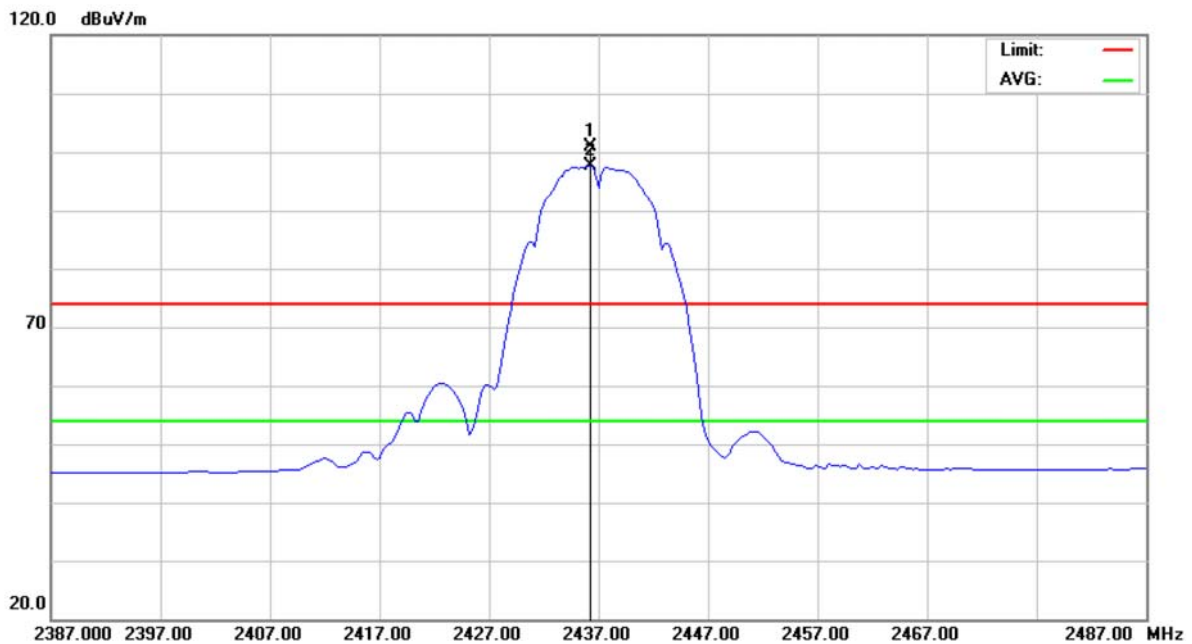


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2436.250	69.07	31.87	100.94	74.00	26.94	peak	
2	*	2436.250	65.83	31.87	97.70	54.00	43.70	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11b/2437 MHz		

Polarization: Horizontal

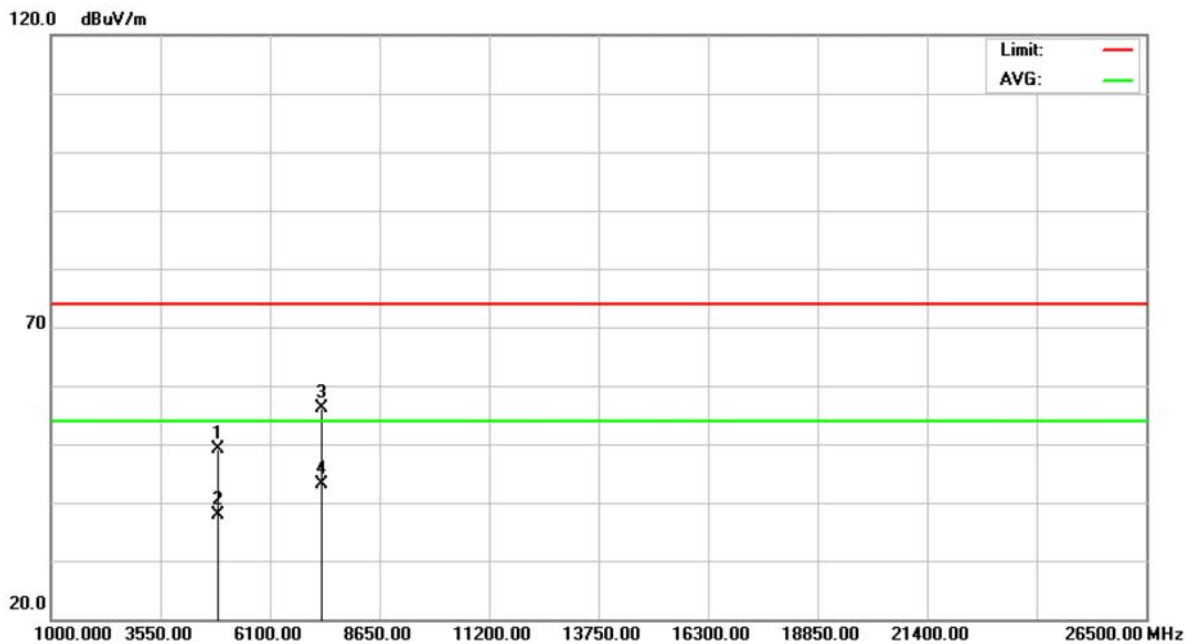


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4873.925	43.46	5.78	49.24	74.00	-24.76	peak	
2		4873.925	32.10	5.78	37.88	54.00	-16.12	AVG	
3		7311.010	43.48	12.57	56.05	74.00	-17.95	peak	
4	*	7311.010	30.64	12.57	43.21	54.00	-10.79	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11b/2462 MHz		

Polarization: Vertical

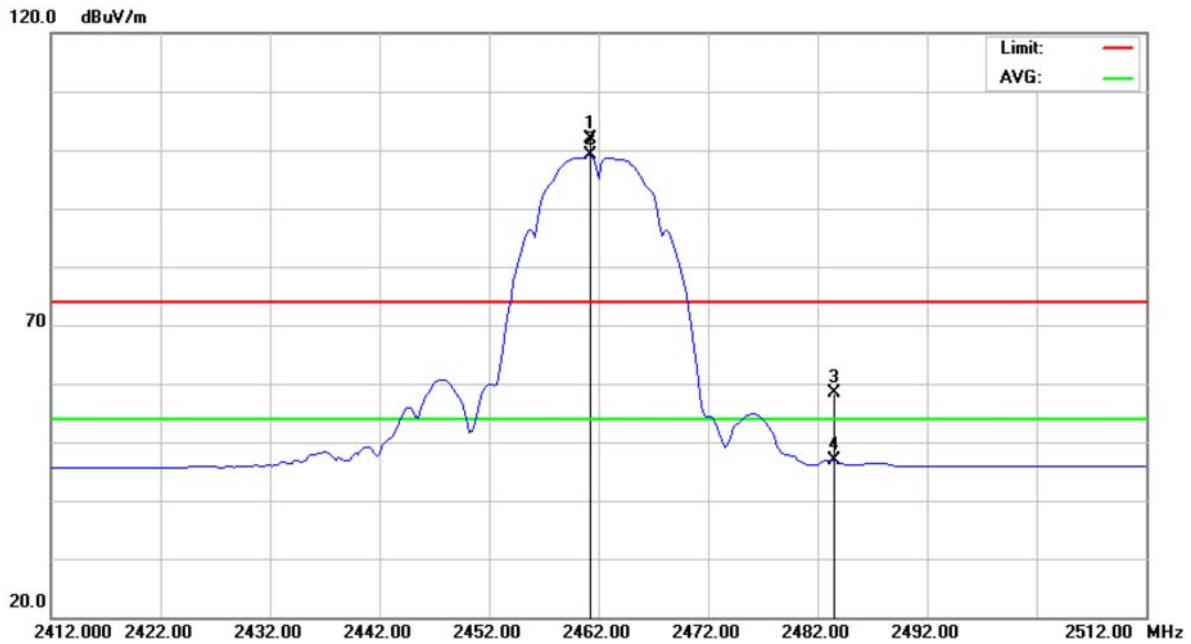


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2461.250	69.98	31.99	101.97	74.00	27.97	peak	
2	*	2461.250	67.08	31.99	99.07	54.00	45.07	AVG	
3		2483.500	26.17	32.09	58.26	74.00	-15.74	peak	
4		2483.500	14.85	32.09	46.94	54.00	-7.06	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11b/2462 MHz		

Polarization: Vertical

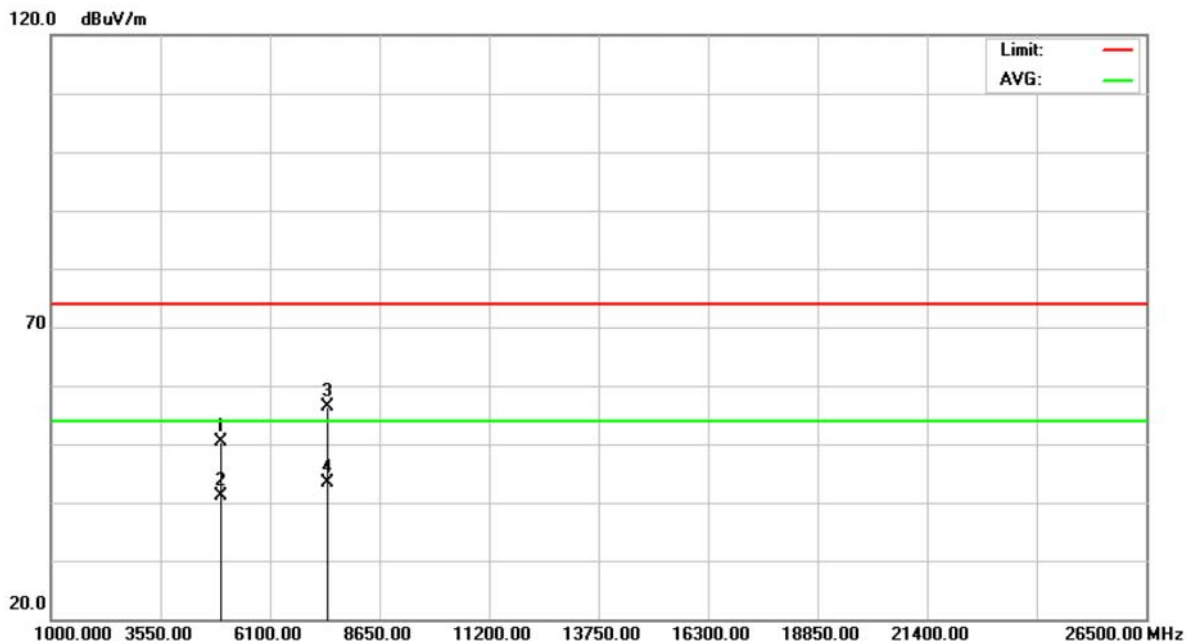


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4923.970	44.51	5.84	50.35	74.00	-23.65	peak	
2		4923.970	35.34	5.84	41.18	54.00	-12.82	AVG	
3		7385.890	43.41	12.85	56.26	74.00	-17.74	peak	
4	*	7385.890	30.57	12.85	43.42	54.00	-10.58	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11b/2462 MHz		

Polarization: Horizontal

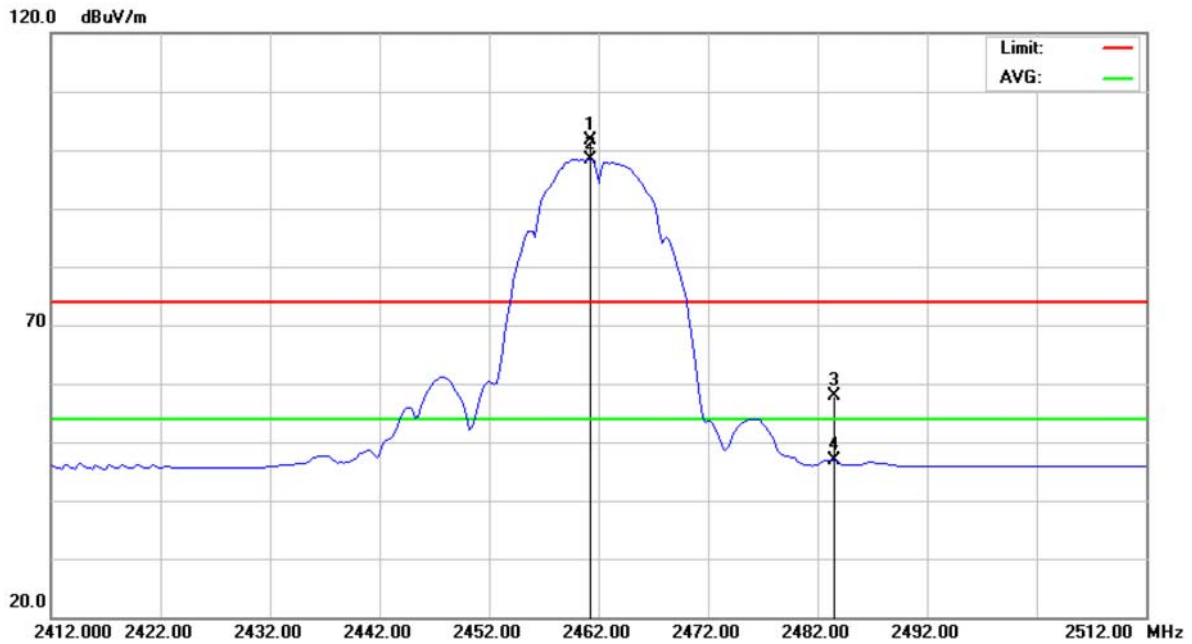


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2461.250	69.59	31.99	101.58	74.00	27.58	peak	
2	*	2461.250	66.43	31.99	98.42	54.00	44.42	AVG	
3		2483.500	25.89	32.09	57.98	74.00	-16.02	peak	
4		2483.500	14.75	32.09	46.84	54.00	-7.16	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11b/2462 MHz		

Polarization: Horizontal

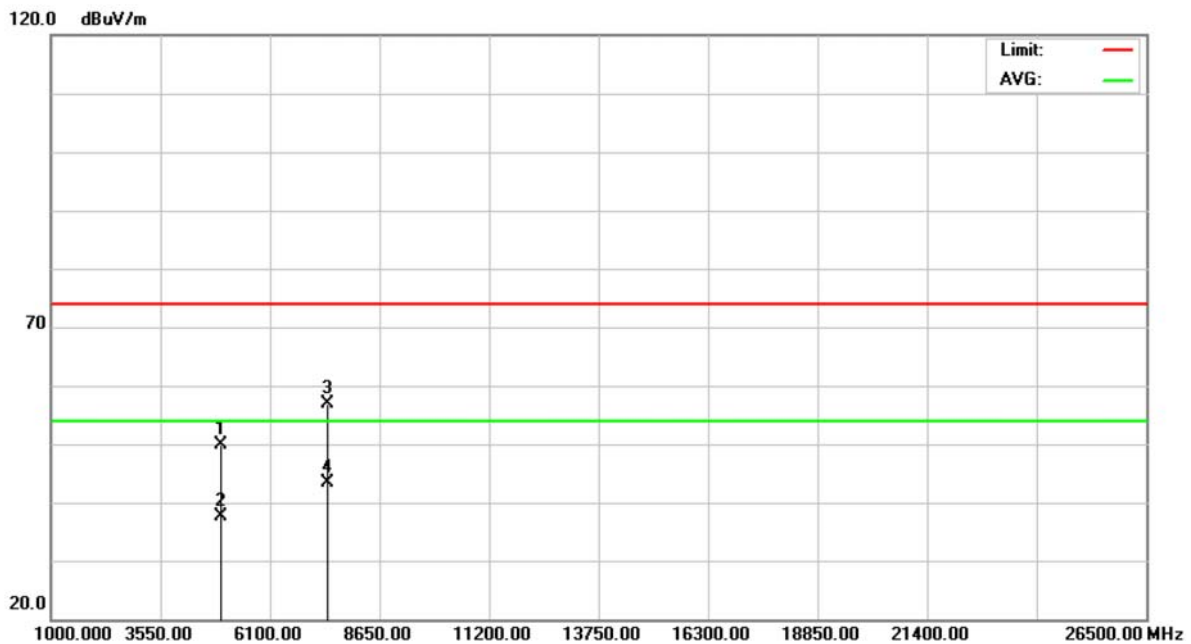


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4923.925	44.14	5.84	49.98	74.00	-24.02	peak	
2		4923.925	31.70	5.84	37.54	54.00	-16.46	AVG	
3		7385.970	44.06	12.85	56.91	74.00	-17.09	peak	
4	*	7385.970	30.65	12.85	43.50	54.00	-10.50	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11g/2412 MHz		

Polarization: Vertical

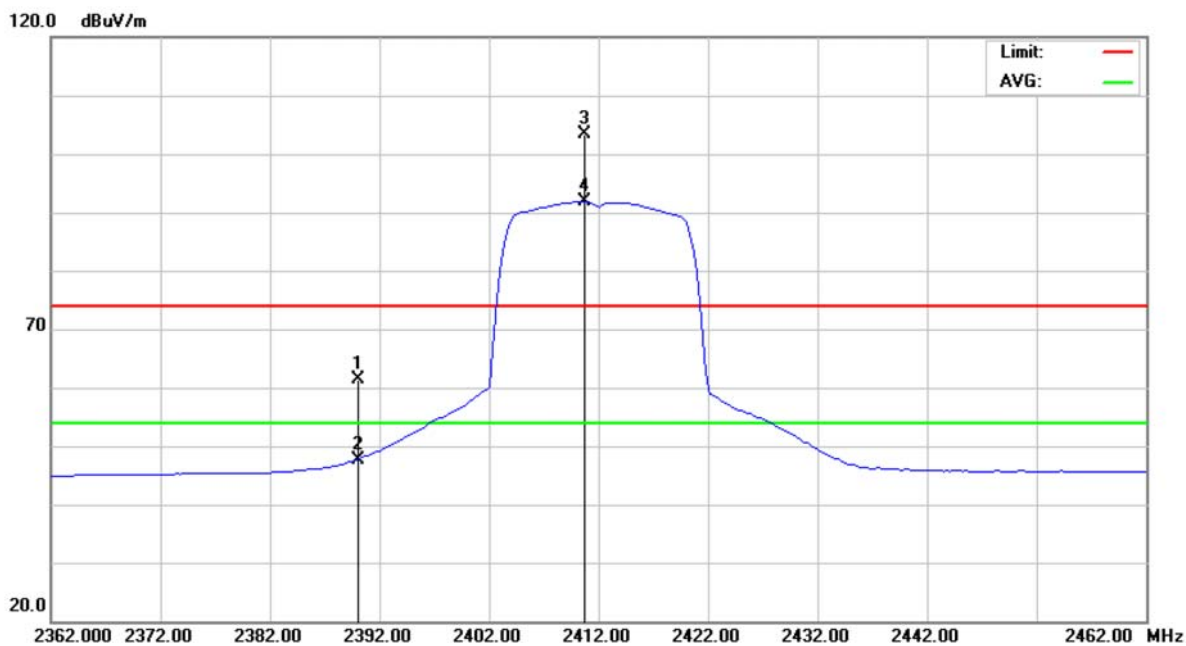


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	29.75	31.67	61.42	74.00	-12.58	peak	
2		2390.000	16.02	31.67	47.69	54.00	-6.31	AVG	
3	X	2410.750	71.52	31.76	103.28	74.00	29.28	peak	
4	*	2410.750	60.11	31.76	91.87	54.00	37.87	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11g/2412 MHz		

Polarization: Vertical

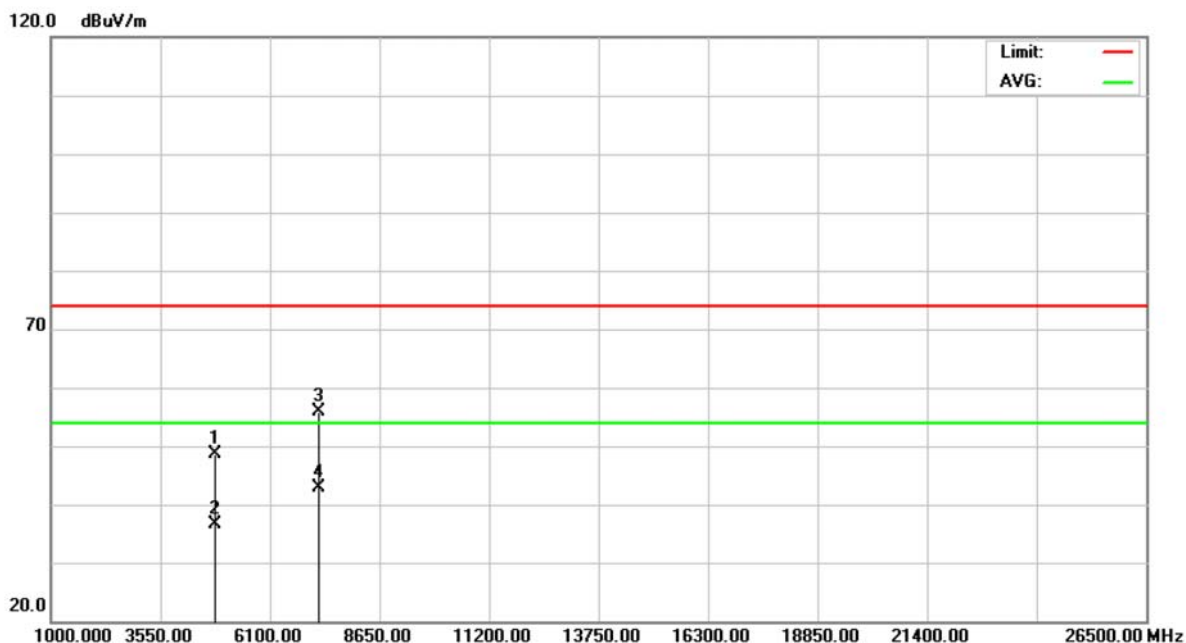


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4824.030	43.01	5.71	48.72	74.00	-25.28	peak	
2		4824.030	30.98	5.71	36.69	54.00	-17.31	AVG	
3		7236.025	43.53	12.29	55.82	74.00	-18.18	peak	
4	*	7236.025	30.68	12.29	42.97	54.00	-11.03	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11g/2412 MHz		

Polarization: Horizontal

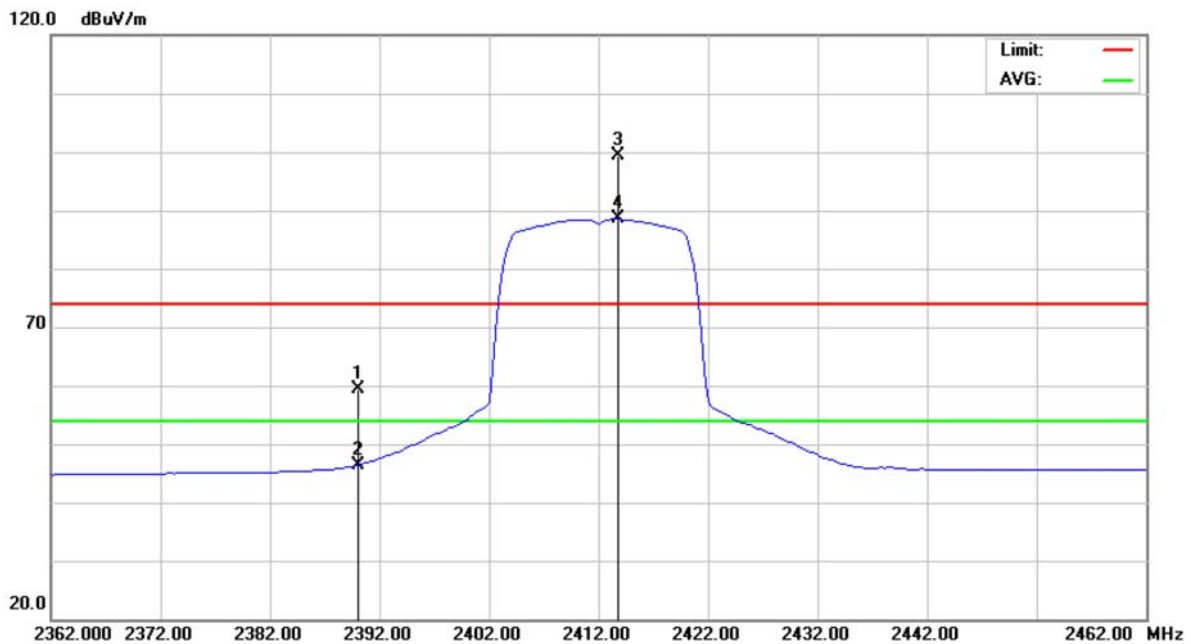


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	27.63	31.67	59.30	74.00	-14.70	peak	
2		2390.000	14.76	31.67	46.43	54.00	-7.57	AVG	
3	X	2413.750	67.61	31.77	99.38	74.00	25.38	peak	
4	*	2413.750	56.78	31.77	88.55	54.00	34.55	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11g/2412 MHz		

Polarization: Horizontal

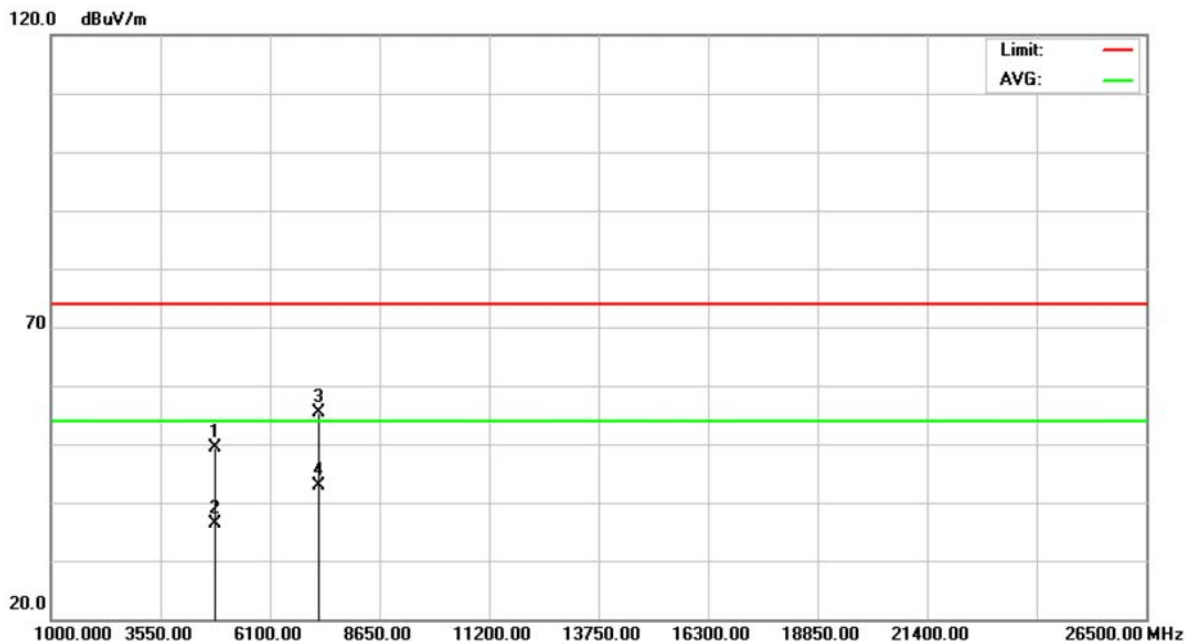


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4823.940	43.74	5.71	49.45	74.00	-24.55	peak	
2		4823.940	30.70	5.71	36.41	54.00	-17.59	AVG	
3		7235.905	42.99	12.29	55.28	74.00	-18.72	peak	
4	*	7235.905	30.61	12.29	42.90	54.00	-11.10	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11g/2437 MHz		

Polarization: Vertical

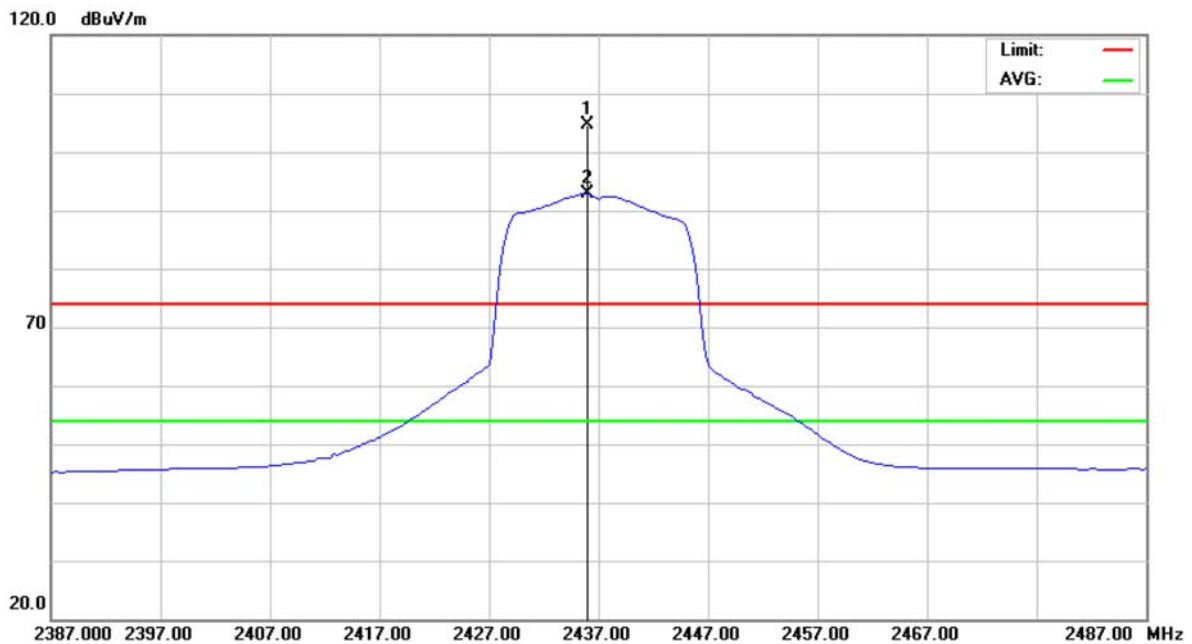


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2436.000	72.66	31.87	104.53	74.00	30.53	peak	
2	*	2436.000	61.01	31.87	92.88	54.00	38.88	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11g/2437 MHz		

Polarization: Vertical

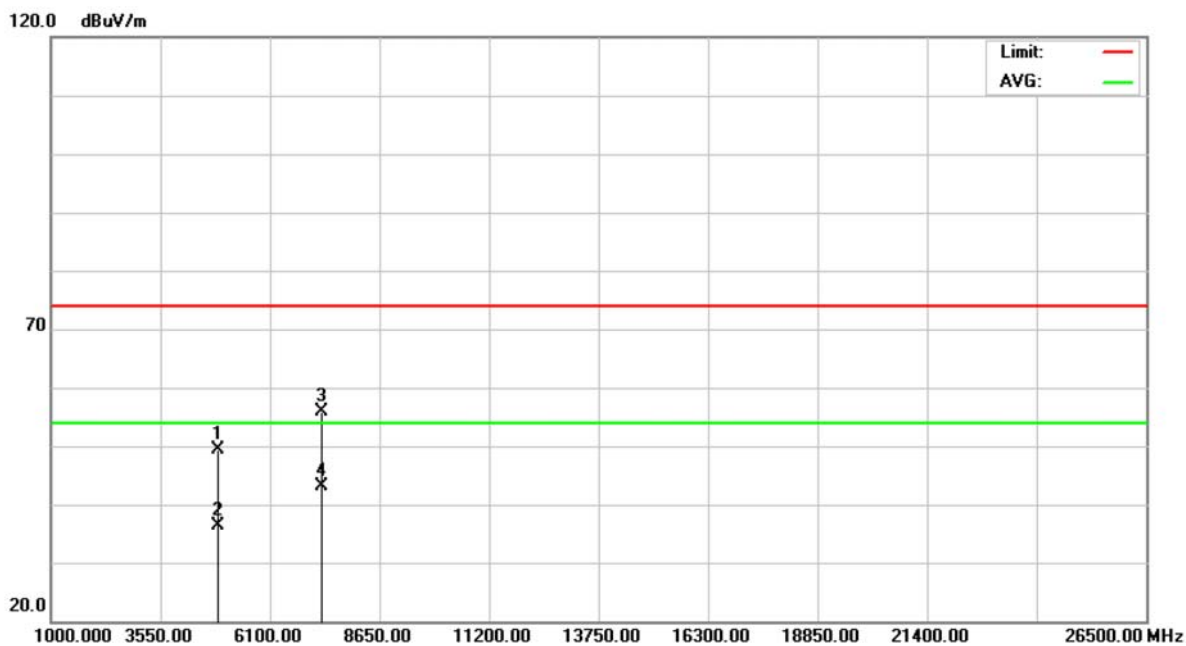


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4874.005	43.65	5.78	49.43	74.00	-24.57	peak	
2		4874.005	30.50	5.78	36.28	54.00	-17.72	AVG	
3		7310.585	43.32	12.57	55.89	74.00	-18.11	peak	
4	*	7310.585	30.51	12.57	43.08	54.00	-10.92	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11g/2437 MHz		

Polarization: Horizontal

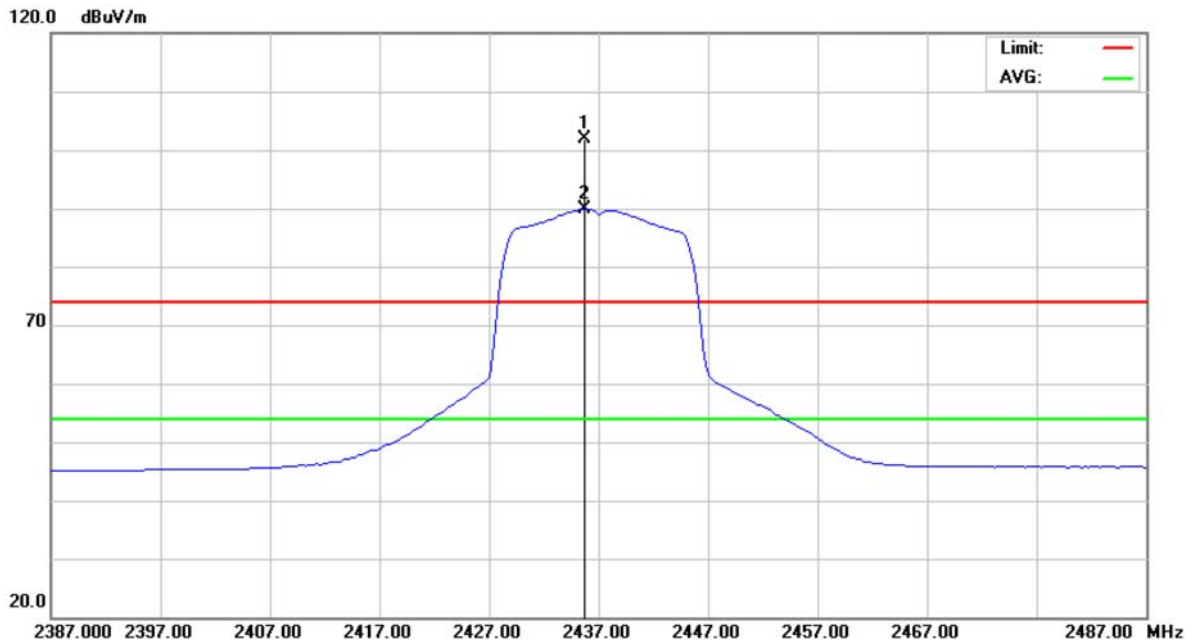


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2435.750	70.05	31.87	101.92	74.00	27.92	peak	
2	*	2435.750	58.08	31.87	89.95	54.00	35.95	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11g/2437 MHz		

Polarization: Horizontal

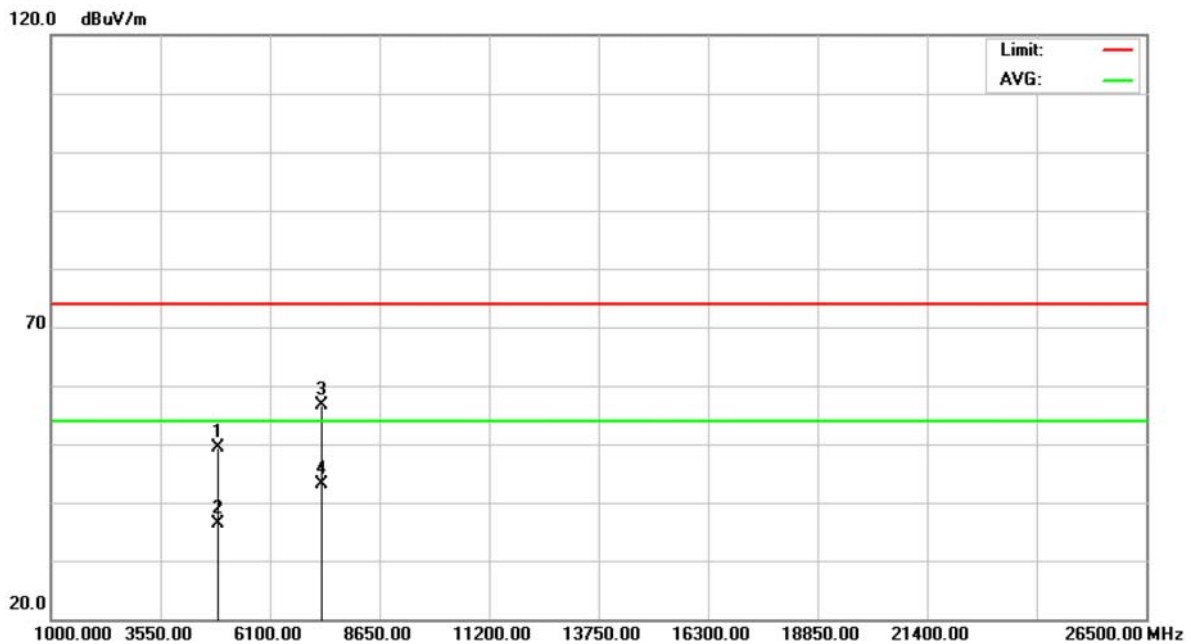


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4873.740	43.62	5.78	49.40	74.00	-24.60	peak	
2		4873.740	30.50	5.78	36.28	54.00	-17.72	AVG	
3		7311.005	44.11	12.57	56.68	74.00	-17.32	peak	
4	*	7311.005	30.52	12.57	43.09	54.00	-10.91	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11g/2462 MHz		

Polarization: Vertical

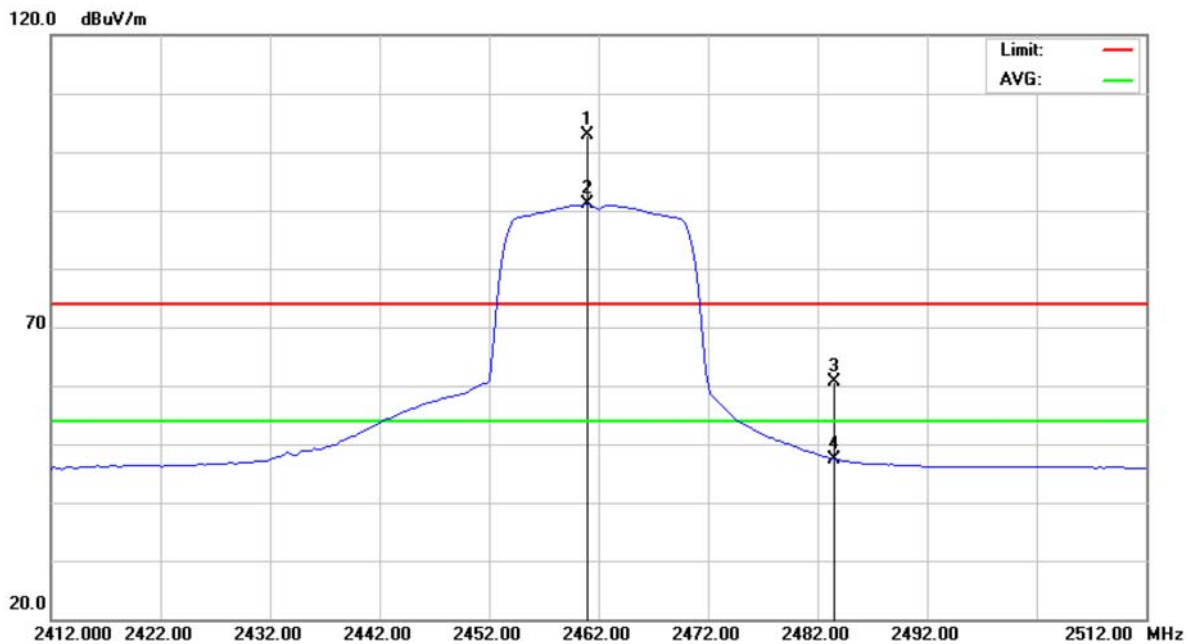


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2461.000	70.97	31.99	102.96	74.00	28.96	peak	
2	*	2461.000	59.06	31.99	91.05	54.00	37.05	AVG	
3		2483.500	28.52	32.09	60.61	74.00	-13.39	peak	
4		2483.500	15.40	32.09	47.49	54.00	-6.51	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11g/2462 MHz		

Polarization: Vertical

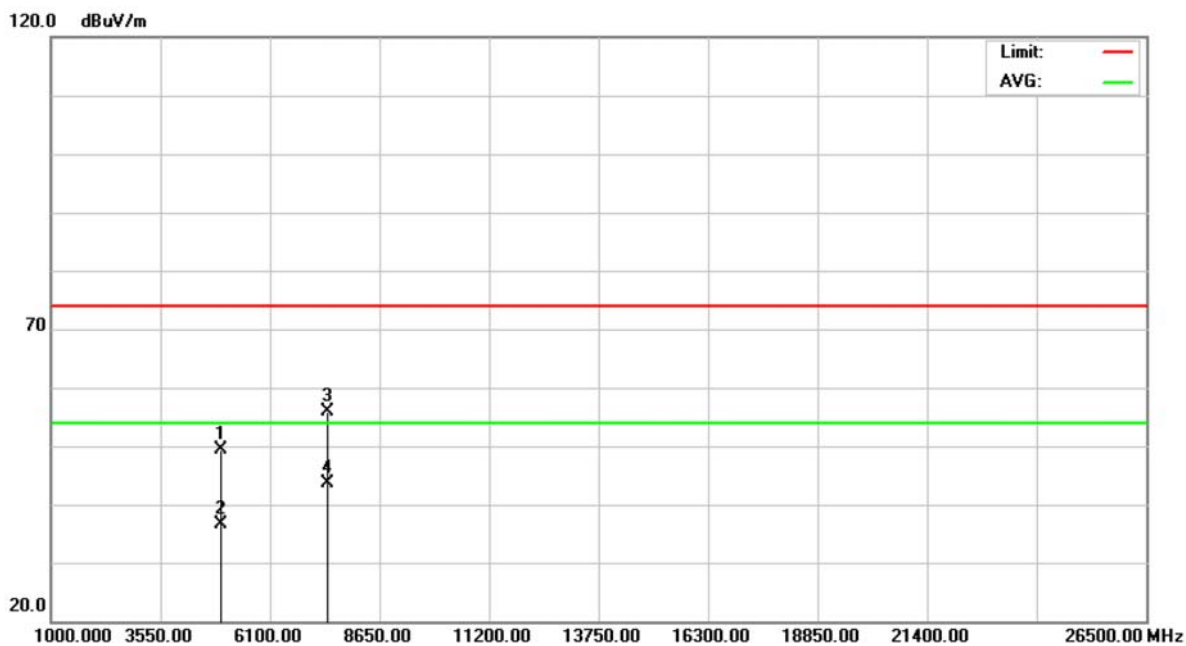


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4924.030	43.45	5.84	49.29	74.00	-24.71	peak	
2		4924.030	30.77	5.84	36.61	54.00	-17.39	AVG	
3		7386.075	43.12	12.85	55.97	74.00	-18.03	peak	
4	*	7386.075	30.68	12.85	43.53	54.00	-10.47	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11g/2462 MHz		

Polarization: Horizontal

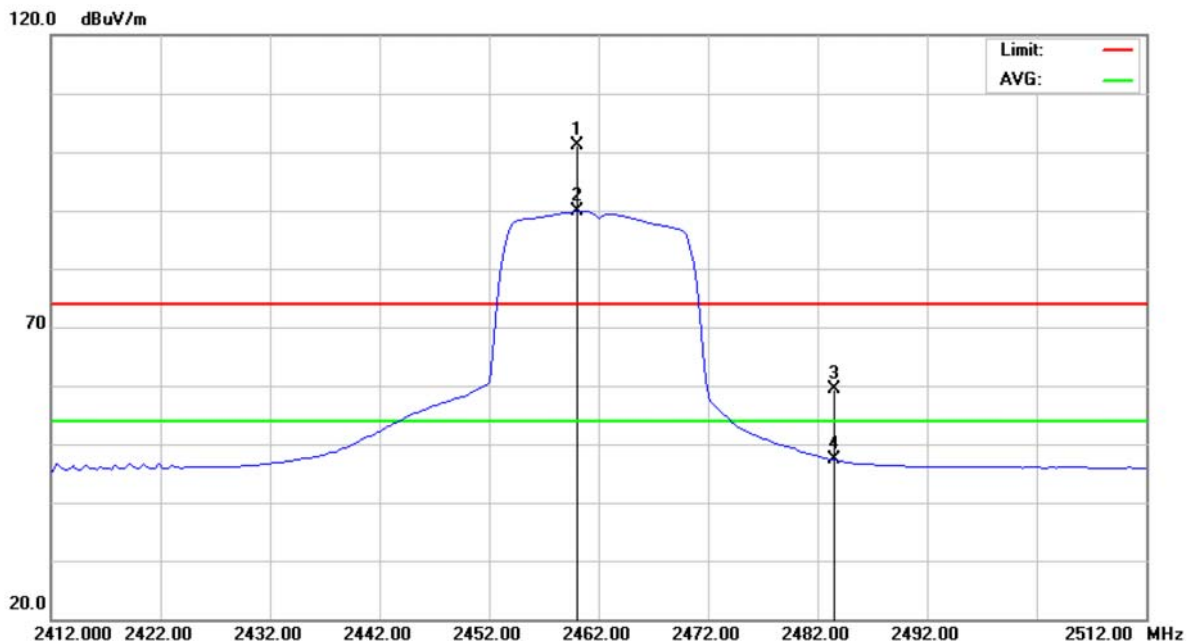


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2460.000	69.23	31.98	101.21	74.00	27.21	peak	
2	*	2460.000	57.84	31.98	89.82	54.00	35.82	AVG	
3		2483.500	27.30	32.09	59.39	74.00	-14.61	peak	
4		2483.500	15.21	32.09	47.30	54.00	-6.70	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11g/2462 MHz		

Polarization: Horizontal

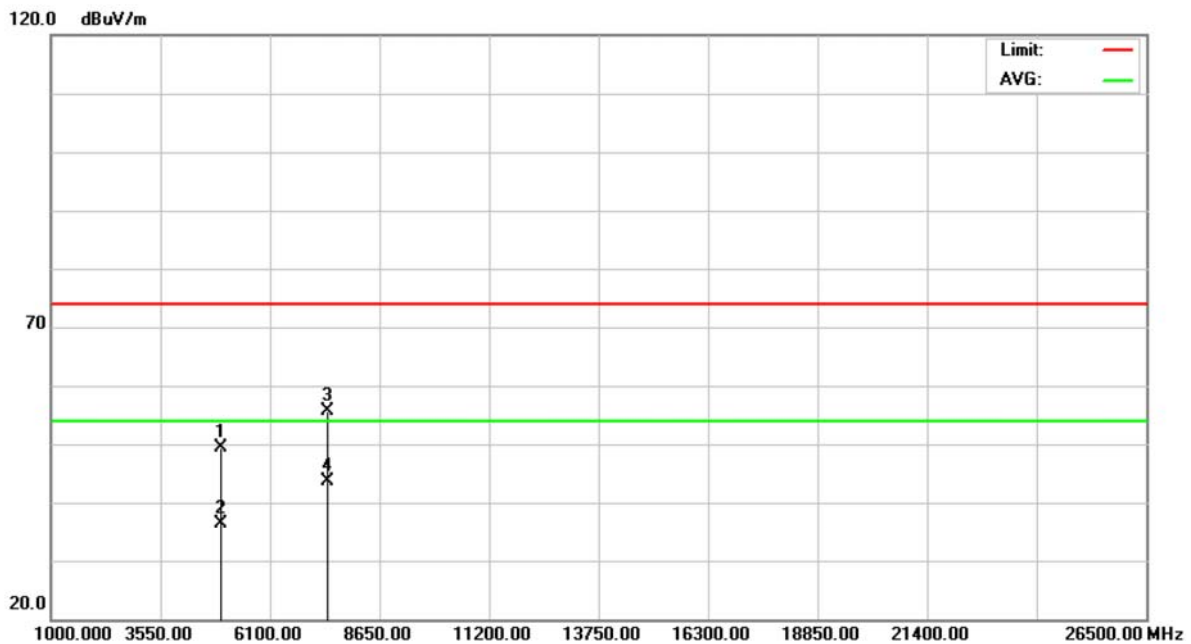


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4924.405	43.58	5.84	49.42	74.00	-24.58	peak	
2		4924.405	30.47	5.84	36.31	54.00	-17.69	AVG	
3		7385.955	42.82	12.85	55.67	74.00	-18.33	peak	
4	*	7385.955	30.67	12.85	43.52	54.00	-10.48	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/2412 MHz		

Polarization: Vertical

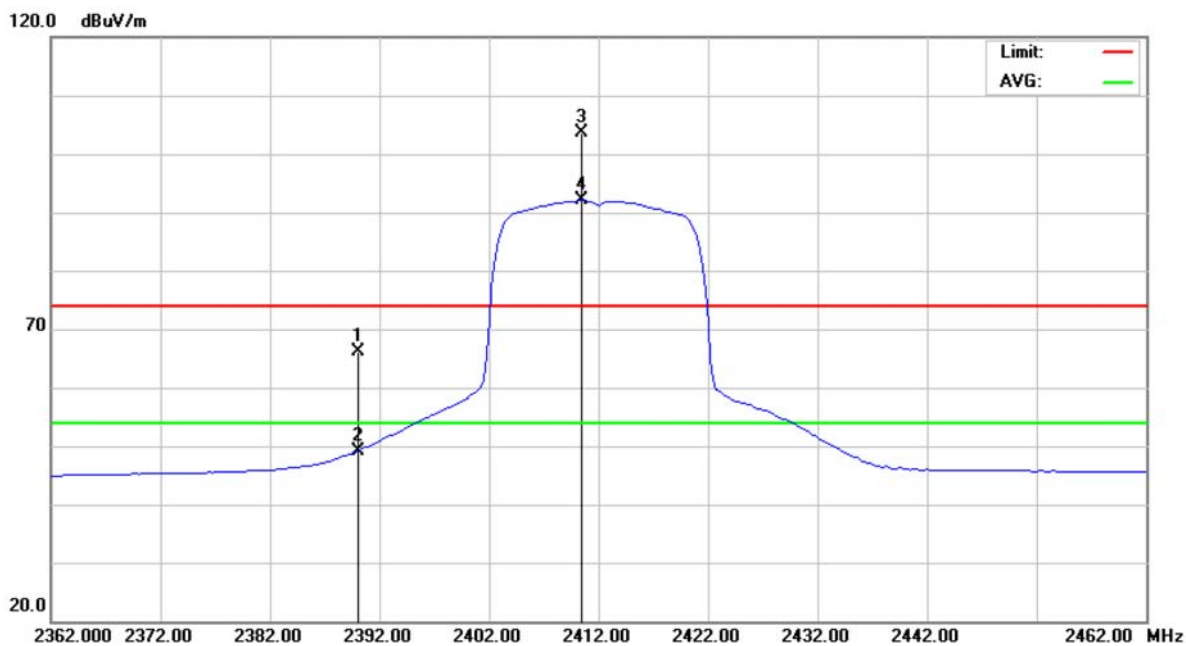


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	34.44	31.67	66.11	74.00	-7.89	peak	
2		2390.000	17.48	31.67	49.15	54.00	-4.85	AVG	
3	X	2410.500	71.99	31.76	103.75	74.00	29.75	peak	
4	*	2410.500	60.31	31.76	92.07	54.00	38.07	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/2412 MHz		

Polarization: Vertical

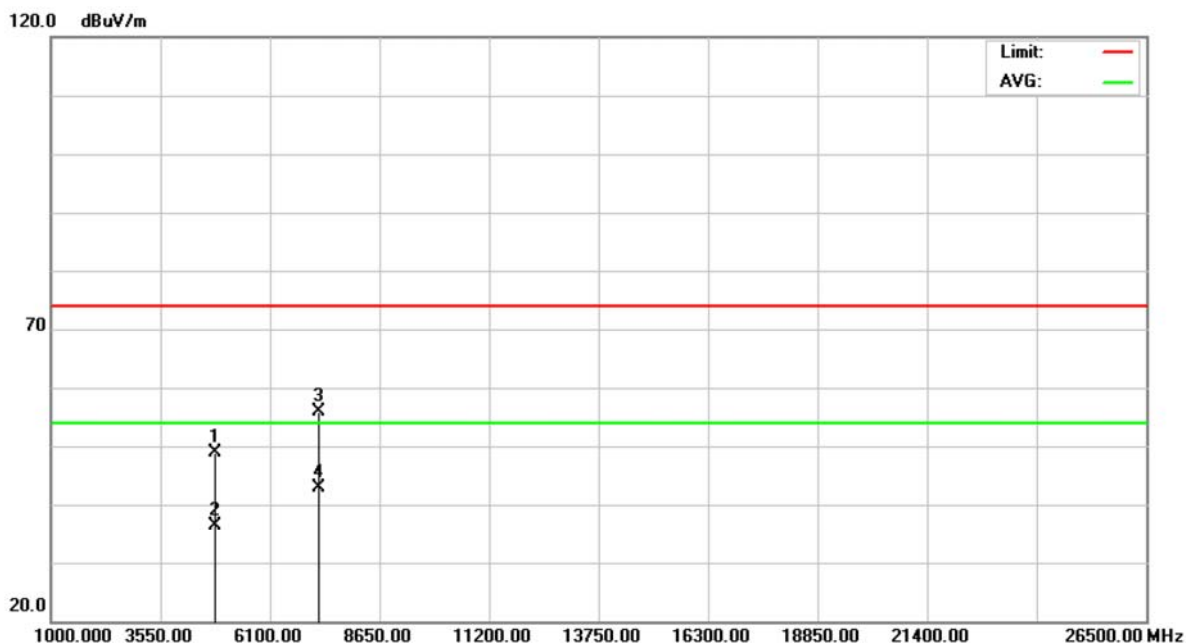


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4824.010	43.17	5.71	48.88	74.00	-25.12	peak	
2		4824.010	30.62	5.71	36.33	54.00	-17.67	AVG	
3		7235.995	43.49	12.29	55.78	74.00	-18.22	peak	
4	*	7235.995	30.59	12.29	42.88	54.00	-11.12	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/2412 MHz		

Polarization: Horizontal

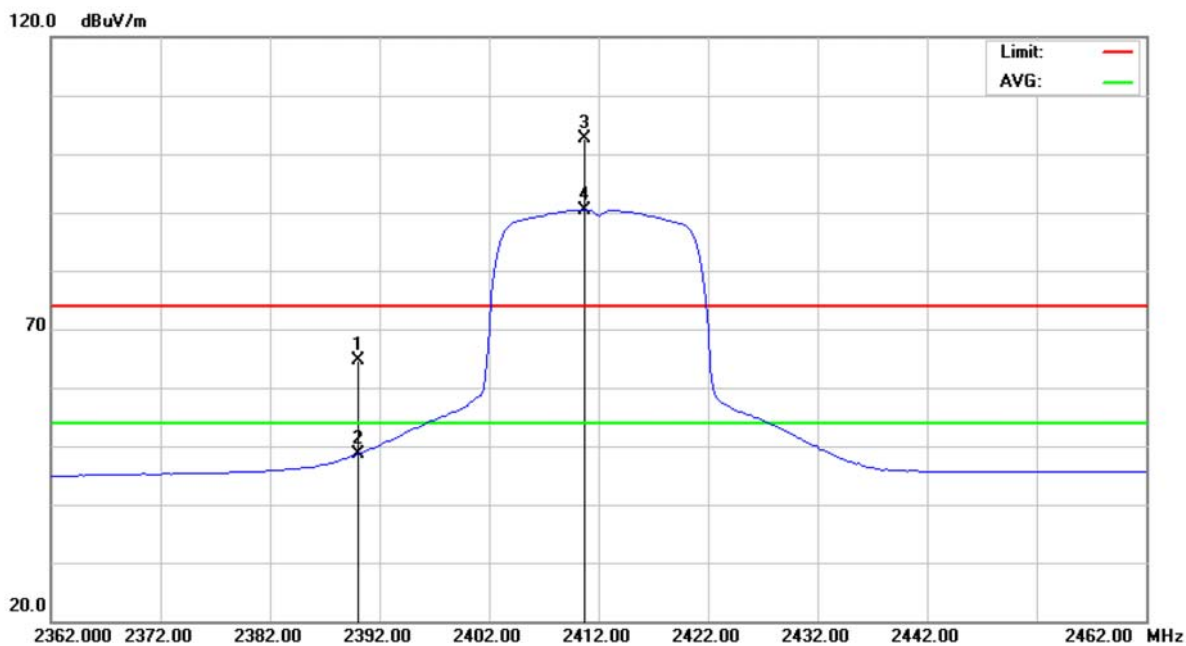


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	32.92	31.67	64.59	74.00	-9.41	peak	
2		2390.000	16.92	31.67	48.59	54.00	-5.41	AVG	
3	X	2410.750	70.89	31.76	102.65	74.00	28.65	peak	
4	*	2410.750	58.67	31.76	90.43	54.00	36.43	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/2412 MHz		

Polarization: Horizontal

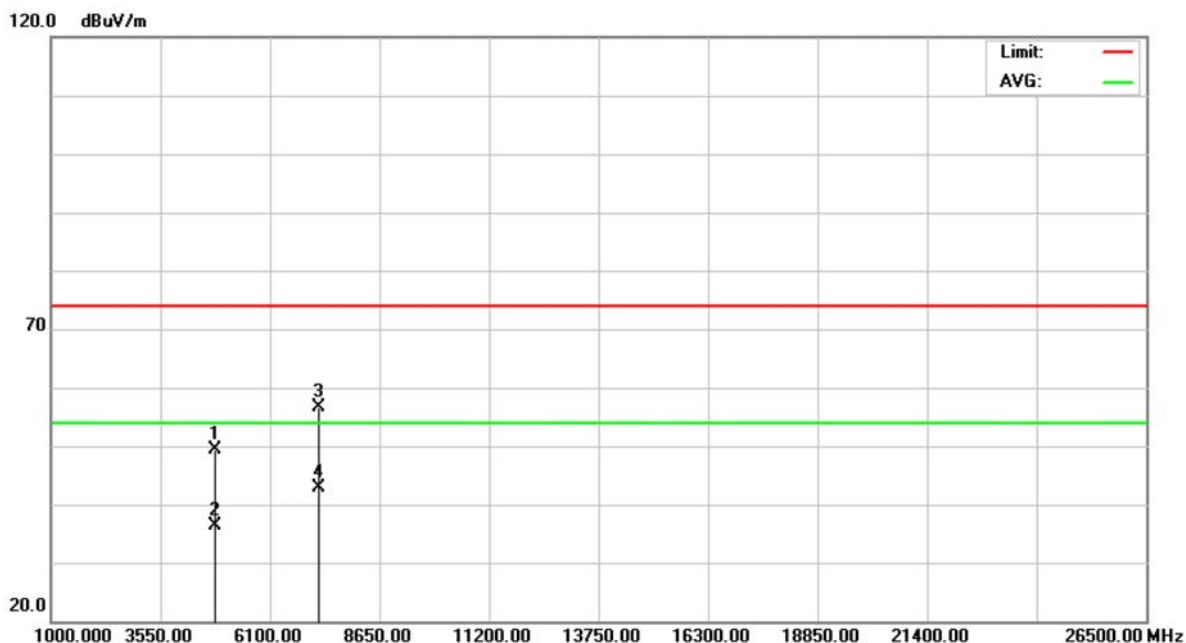


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4823.880	43.57	5.71	49.28	74.00	-24.72	peak	
2		4823.880	30.65	5.71	36.36	54.00	-17.64	AVG	
3		7235.995	44.45	12.29	56.74	74.00	-17.26	peak	
4	*	7235.995	30.57	12.29	42.86	54.00	-11.14	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/2437 MHz		

Polarization: Vertical

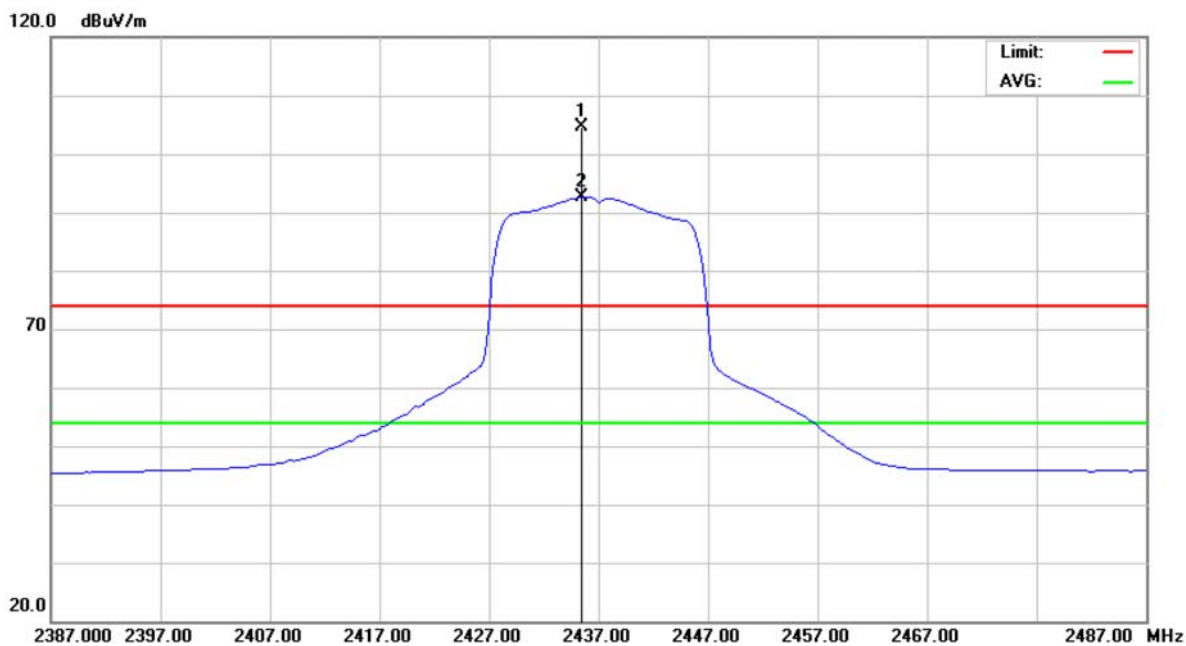


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2435.500	72.73	31.87	104.60	74.00	30.60	peak	
2	*	2435.500	60.84	31.87	92.71	54.00	38.71	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/2437 MHz		

Polarization: Vertical

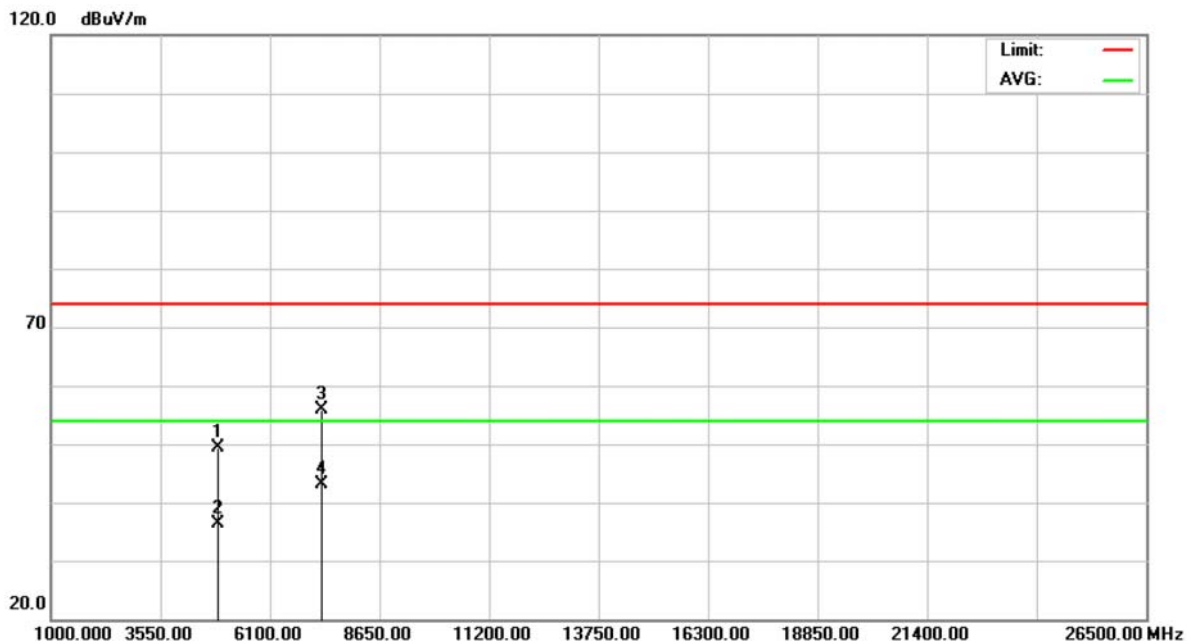


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4873.740	43.51	5.78	49.29	74.00	-24.71	peak	
2		4873.740	30.53	5.78	36.31	54.00	-17.69	AVG	
3		7310.955	43.35	12.57	55.92	74.00	-18.08	peak	
4	*	7310.955	30.59	12.57	43.16	54.00	-10.84	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/2437 MHz		

Polarization: Horizontal

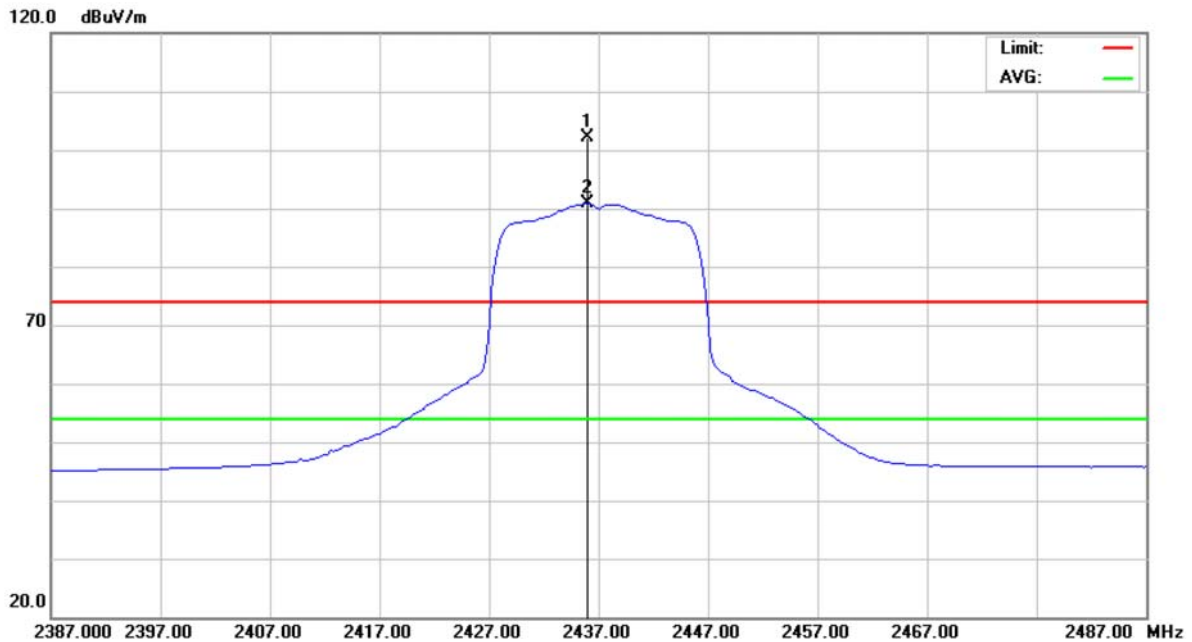


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2436.000	70.14	31.87	102.01	74.00	28.01	peak	
2	*	2436.000	58.91	31.87	90.78	54.00	36.78	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/2437 MHz		

Polarization: Horizontal

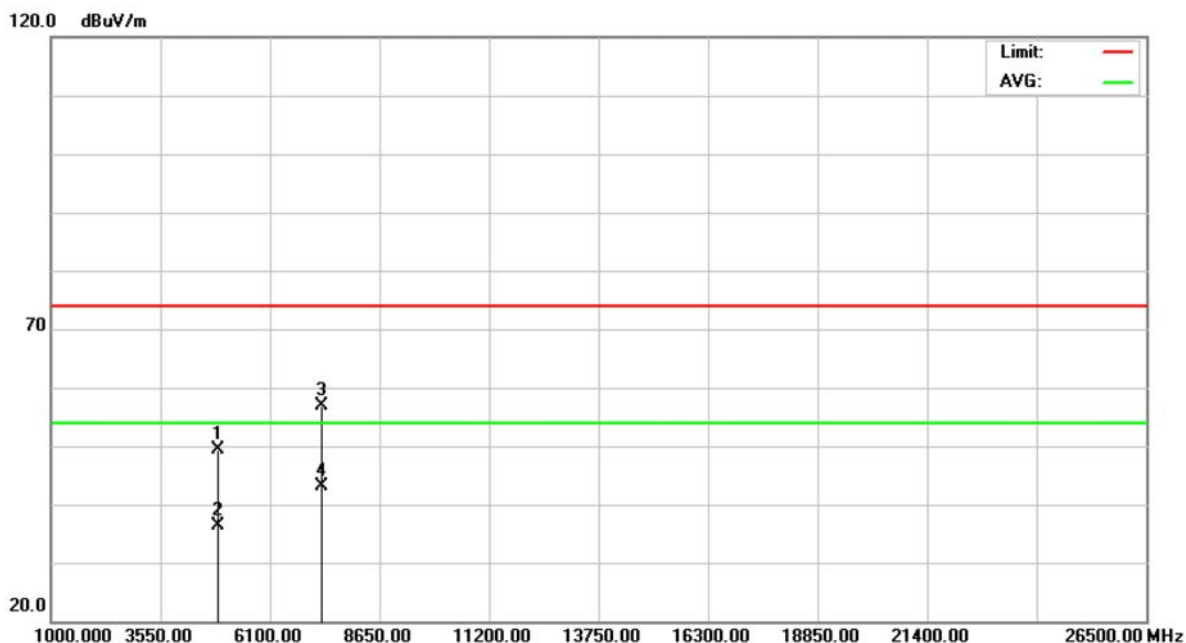


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4873.770	43.52	5.78	49.30	74.00	-24.70	peak	
2		4873.770	30.51	5.78	36.29	54.00	-17.71	AVG	
3		7311.140	44.26	12.57	56.83	74.00	-17.17	peak	
4	*	7311.140	30.59	12.57	43.16	54.00	-10.84	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/2462 MHz		

Polarization: Vertical

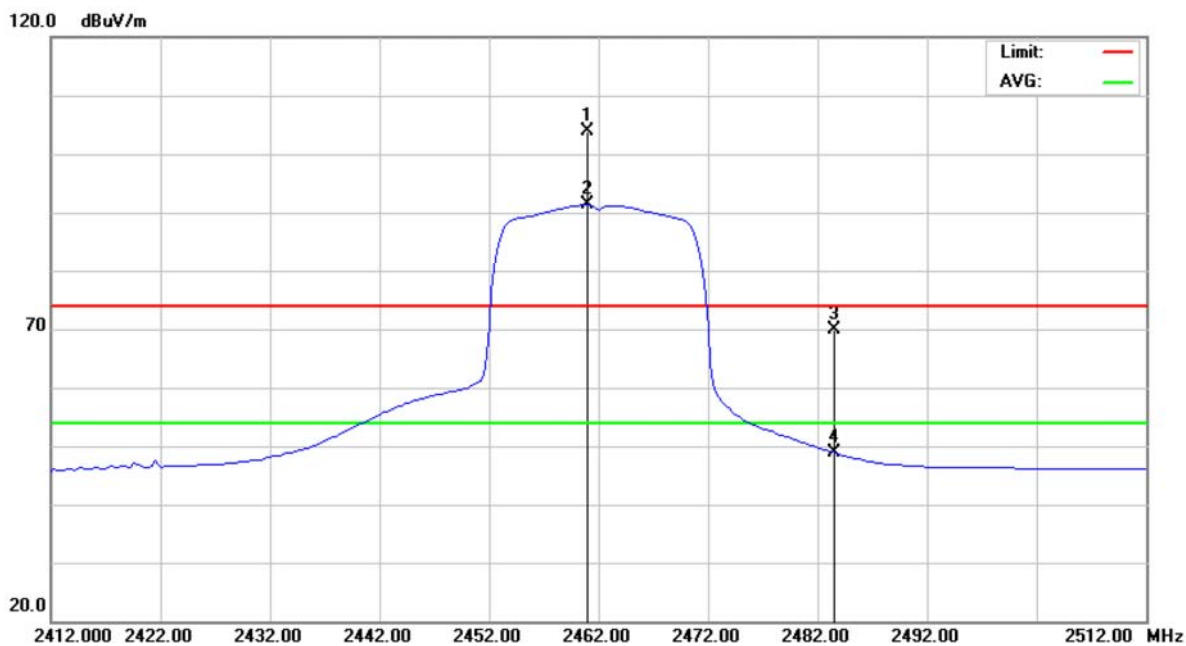


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2461.000	71.77	31.99	103.76	74.00	29.76	peak	
2	*	2461.000	59.33	31.99	91.32	54.00	37.32	AVG	
3		2483.500	37.76	32.09	69.85	74.00	-4.15	peak	
4		2483.500	16.76	32.09	48.85	54.00	-5.15	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/2462 MHz		

Polarization: Vertical

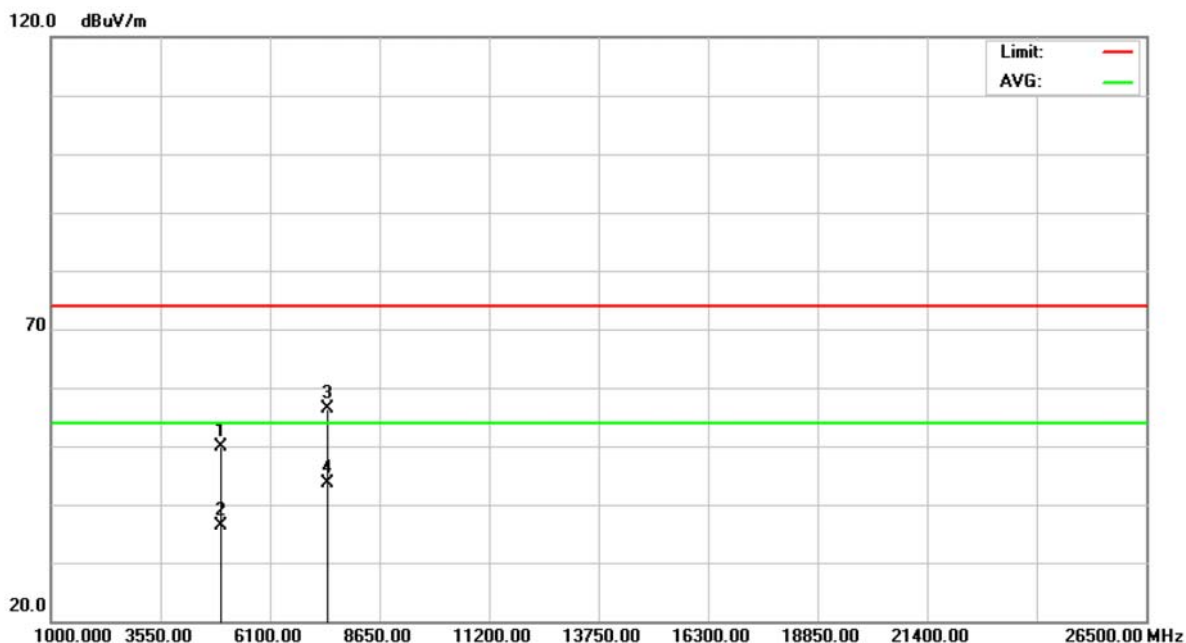


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4923.980	43.95	5.84	49.79	74.00	-24.21	peak	
2		4923.980	30.51	5.84	36.35	54.00	-17.65	AVG	
3		7386.035	43.59	12.85	56.44	74.00	-17.56	peak	
4	*	7386.035	30.69	12.85	43.54	54.00	-10.46	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/2462 MHz		

Polarization: Horizontal

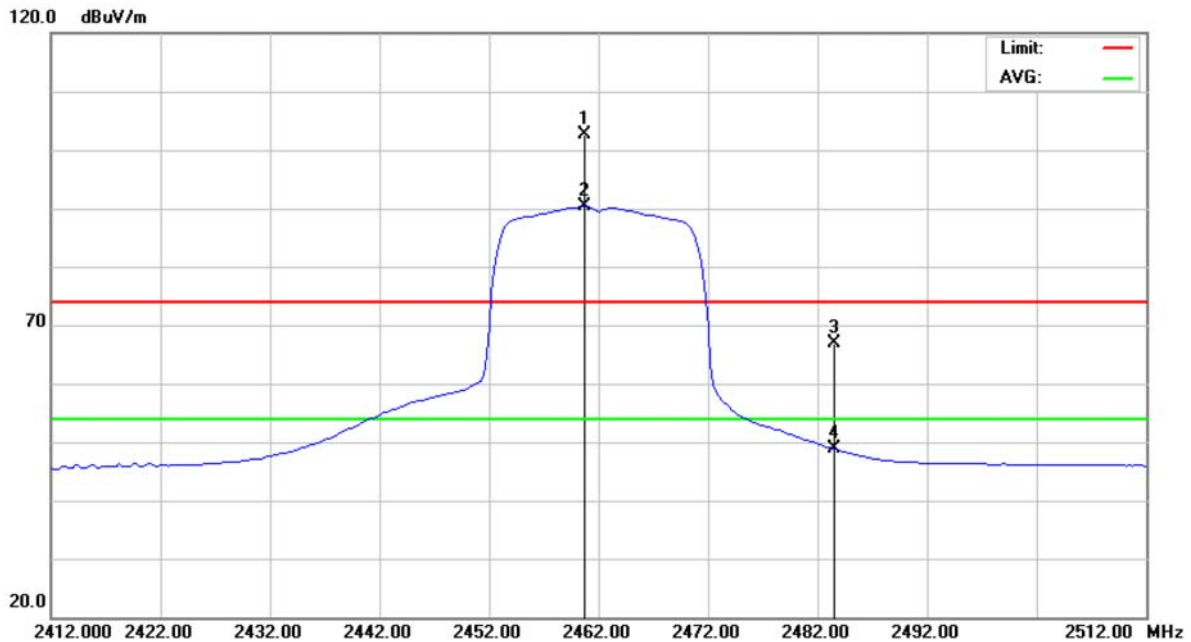


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2460.750	70.70	31.98	102.68	74.00	28.68	peak	
2	*	2460.750	58.30	31.98	90.28	54.00	36.28	AVG	
3		2483.500	34.73	32.09	66.82	74.00	-7.18	peak	
4		2483.500	16.76	32.09	48.85	54.00	-5.15	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/2462 MHz		

Polarization: Horizontal

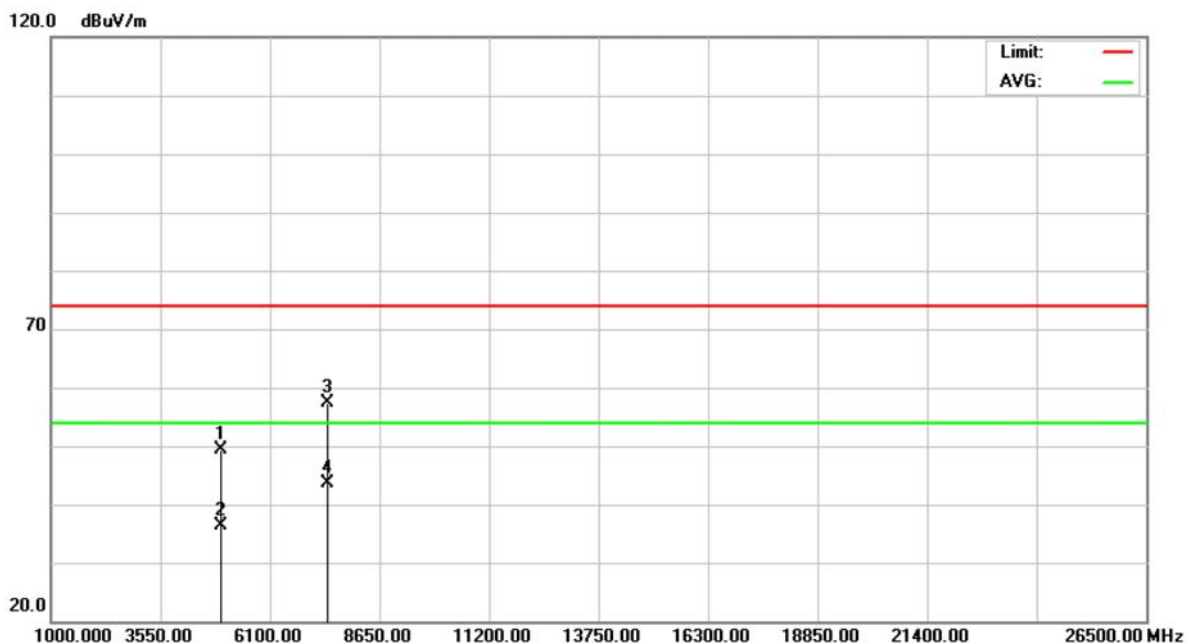


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4924.010	43.53	5.84	49.37	74.00	-24.63	peak	
2		4924.010	30.49	5.84	36.33	54.00	-17.67	AVG	
3		7385.965	44.51	12.85	57.36	74.00	-16.64	peak	
4	*	7385.965	30.66	12.85	43.51	54.00	-10.49	AVG	



9.9 TEST RESULTS (RESTRICTED BANDS)

E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11b		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.		

Polarization: Vertical

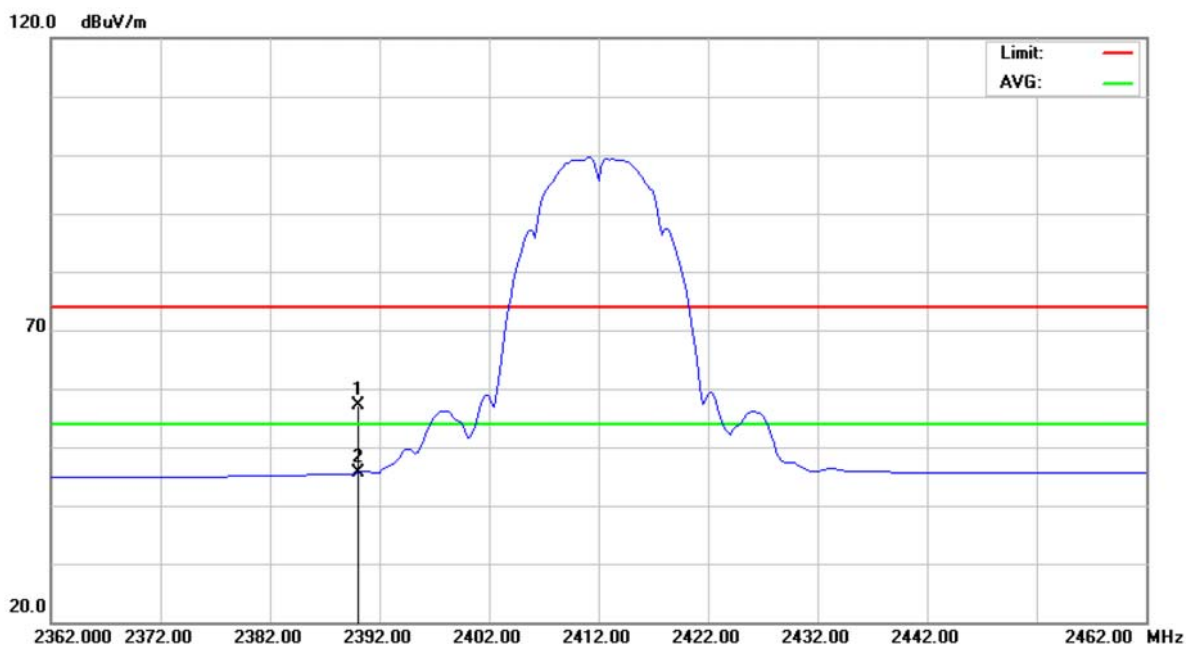


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	25.48	31.67	57.15	74.00	-16.85	peak	
2	*	2390.000	13.91	31.67	45.58	54.00	-8.42	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11b		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.		

Polarization: Horizontal

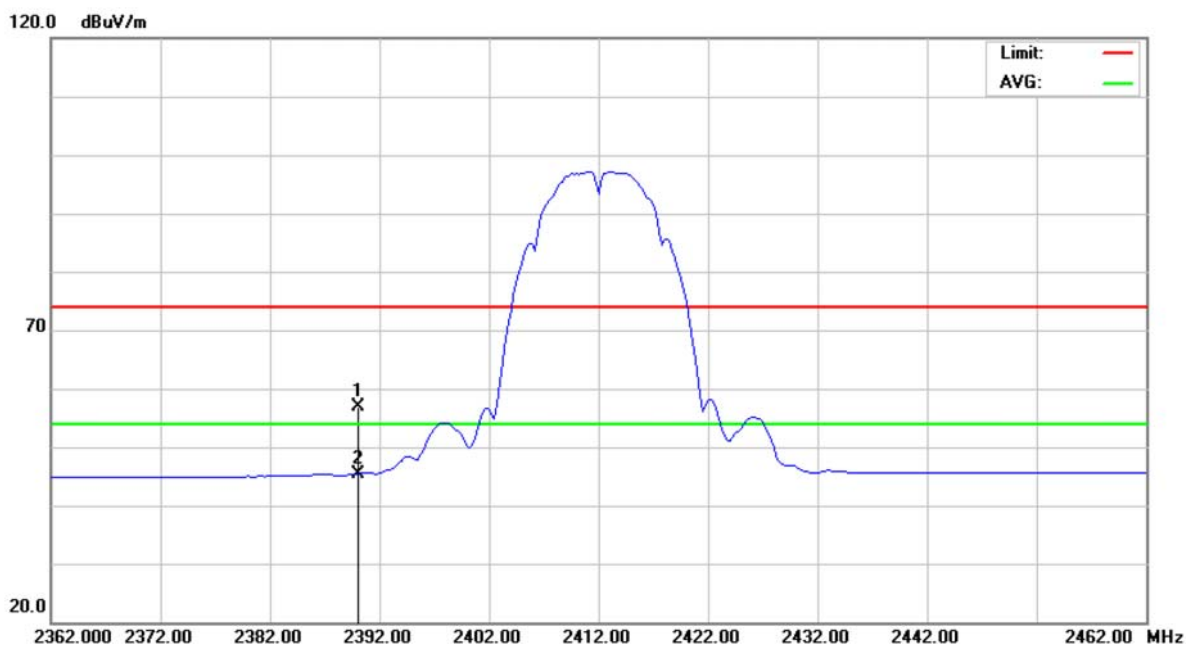


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	25.17	31.67	56.84	74.00	-17.16	peak	
2	*	2390.000	13.72	31.67	45.39	54.00	-8.61	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11b		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.		

Polarization: Vertical

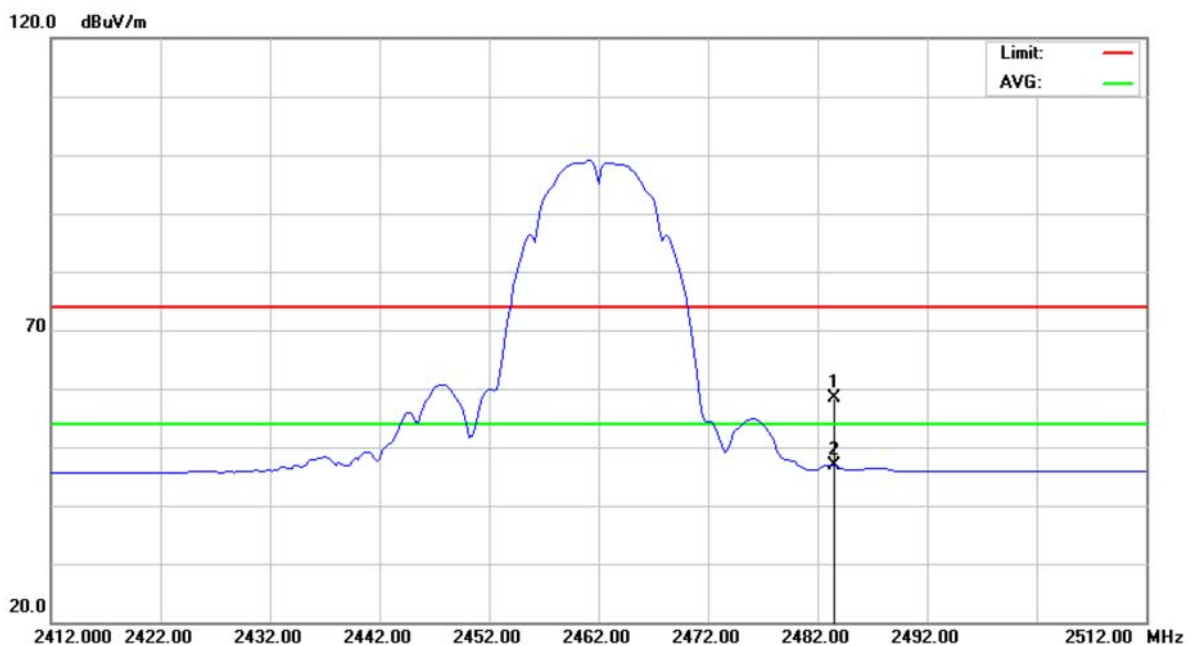


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2483.500	26.17	32.09	58.26	74.00	-15.74	peak	
2	*	2483.500	14.85	32.09	46.94	54.00	-7.06	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11b		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.		

Polarization: Horizontal

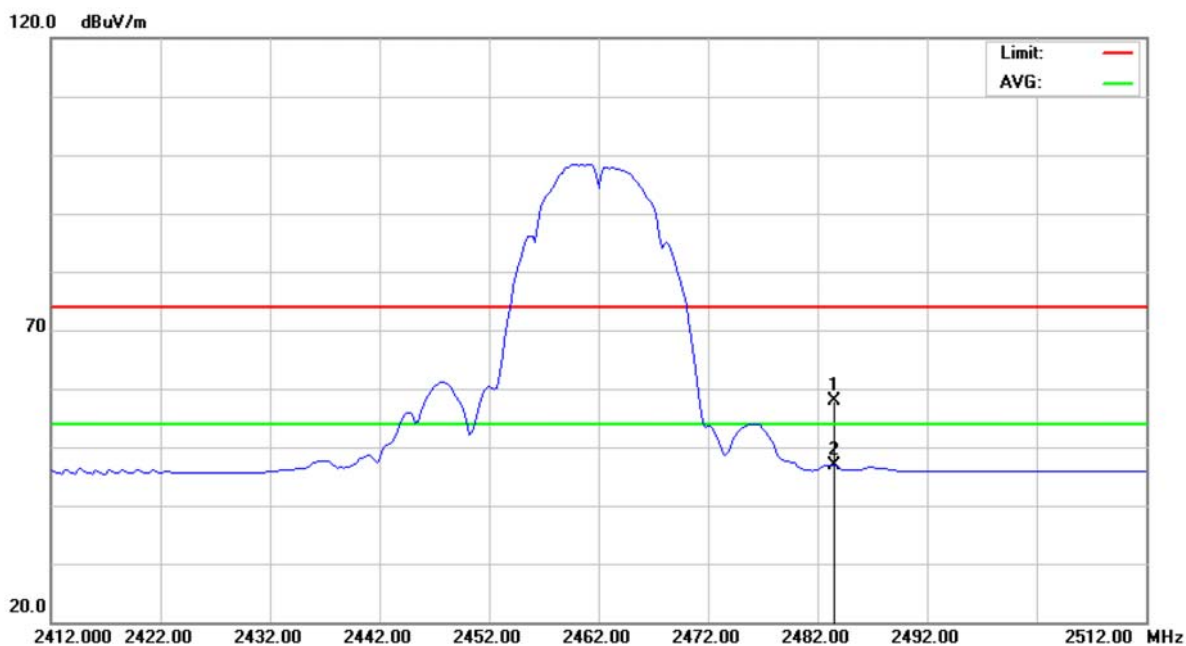


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2483.500	25.89	32.09	57.98	74.00	-16.02	peak	
2	*	2483.500	14.75	32.09	46.84	54.00	-7.16	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11g		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.		

Polarization: Vertical

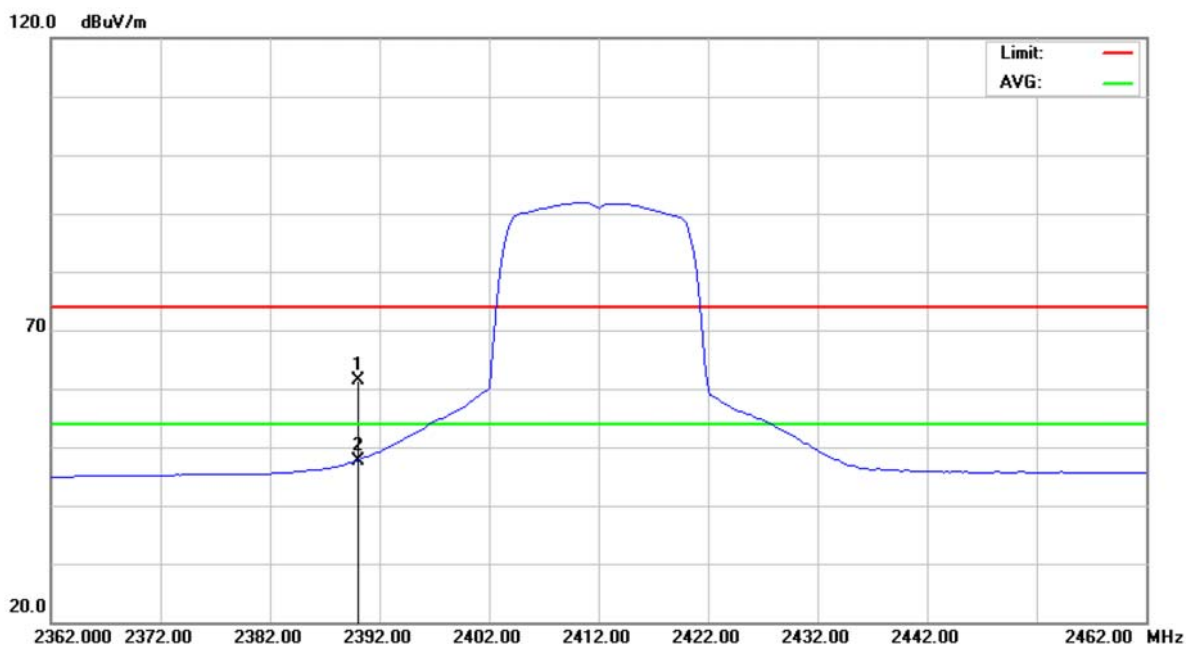


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	29.75	31.67	61.42	74.00	-12.58	peak	
2	*	2390.000	16.02	31.67	47.69	54.00	-6.31	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11g		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.		

Polarization: Horizontal

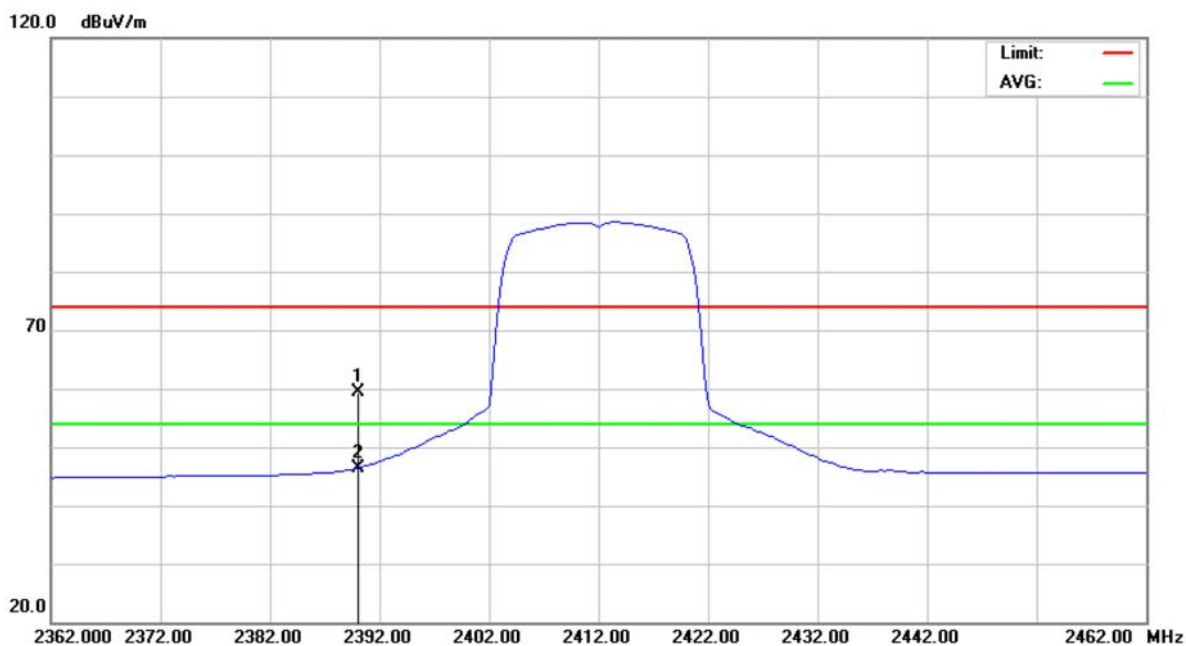


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	27.63	31.67	59.30	74.00	-14.70	peak	
2	*	2390.000	14.76	31.67	46.43	54.00	-7.57	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11g		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.		

Polarization: Vertical

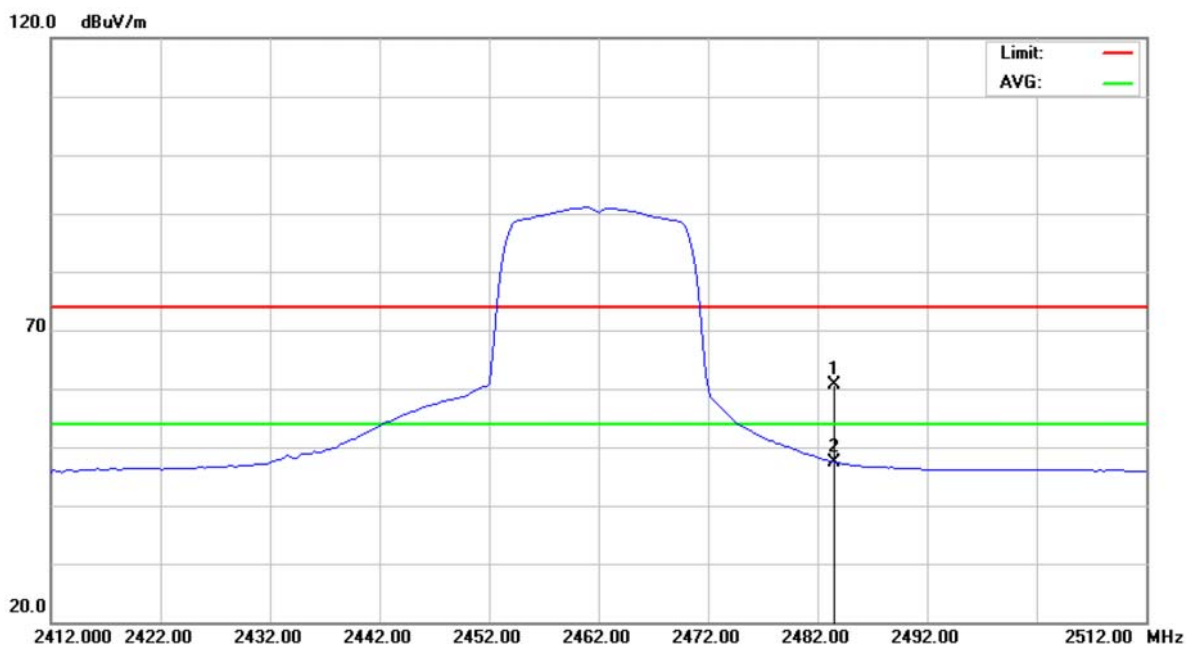


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2483.500	28.52	32.09	60.61	74.00	-13.39	peak	
2	*	2483.500	15.40	32.09	47.49	54.00	-6.51	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11g		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.		

Polarization: Horizontal

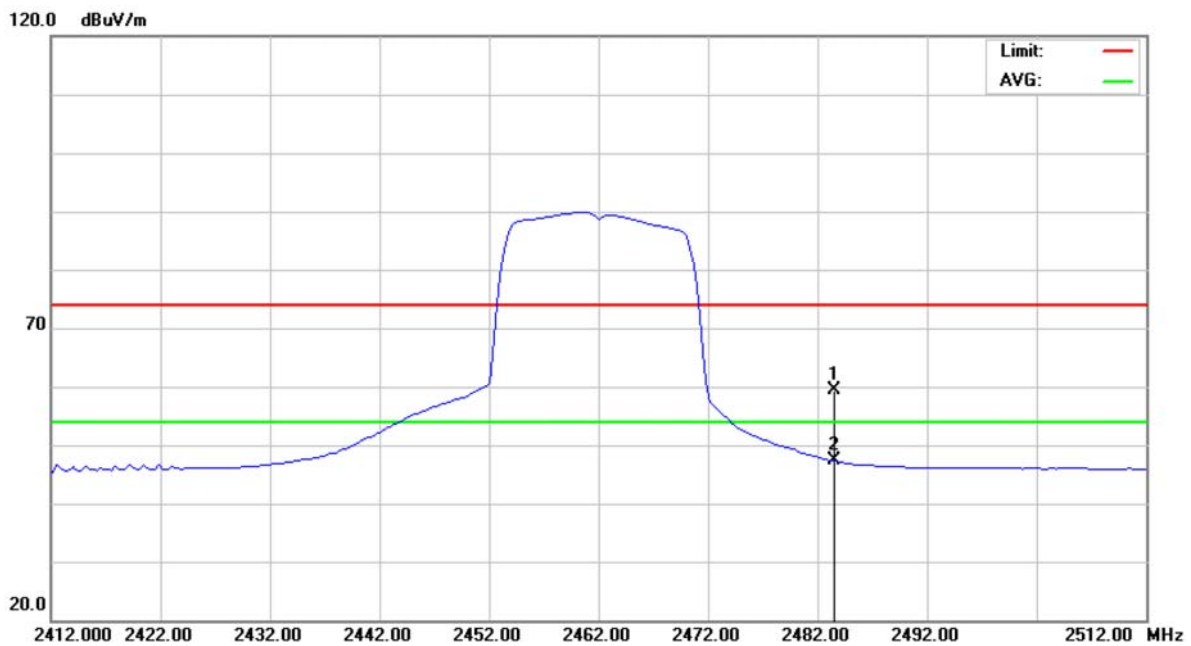


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2483.500	27.30	32.09	59.39	74.00	-14.61	peak	
2	*	2483.500	15.21	32.09	47.30	54.00	-6.70	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.		

Polarization: Vertical

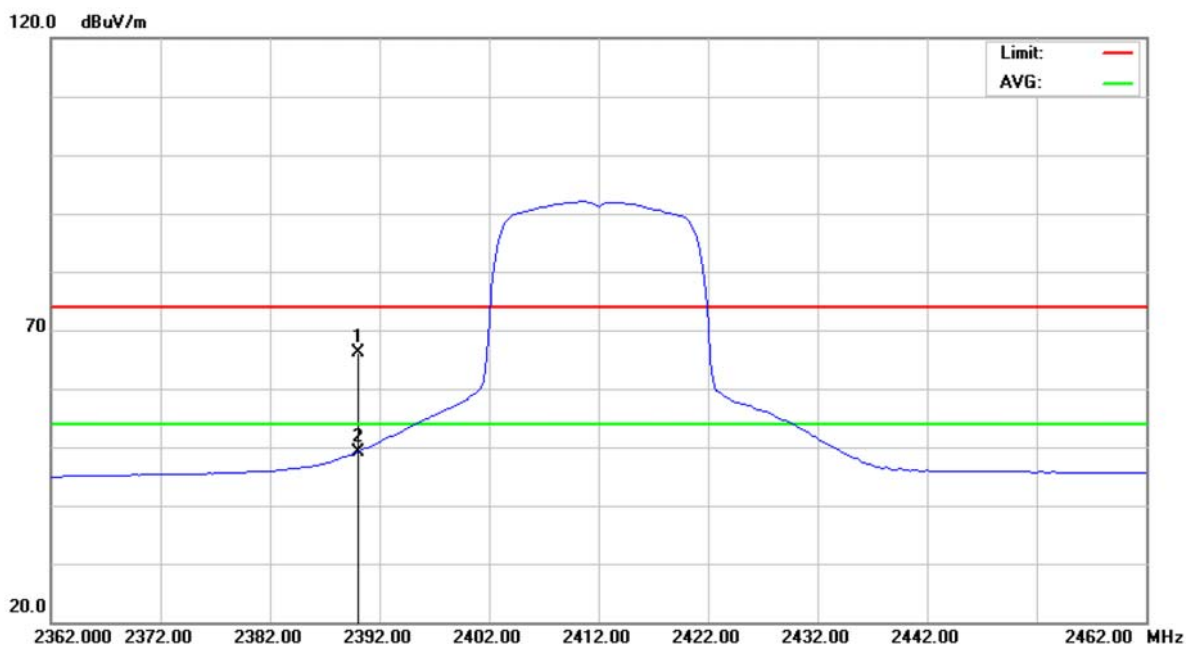


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	34.44	31.67	66.11	74.00	-7.89	peak	
2	*	2390.000	17.48	31.67	49.15	54.00	-4.85	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.		

Polarization: Horizontal

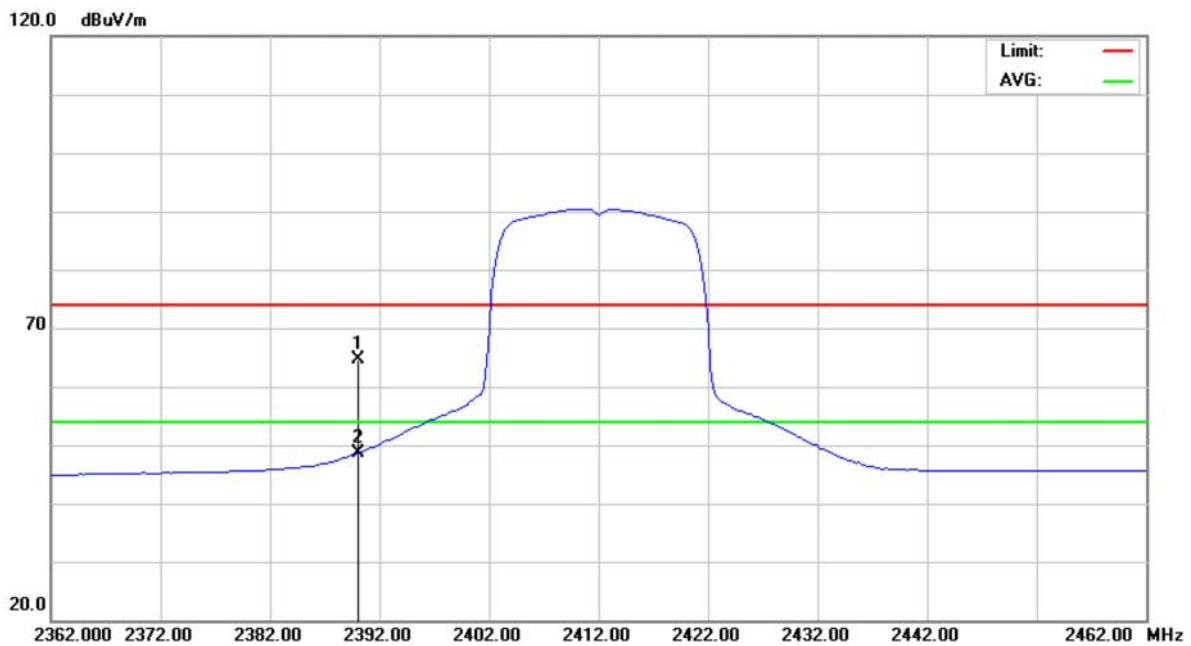


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	32.92	31.67	64.59	74.00	-9.41	peak	
2	*	2390.000	16.92	31.67	48.59	54.00	-5.41	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.		

Polarization: Vertical

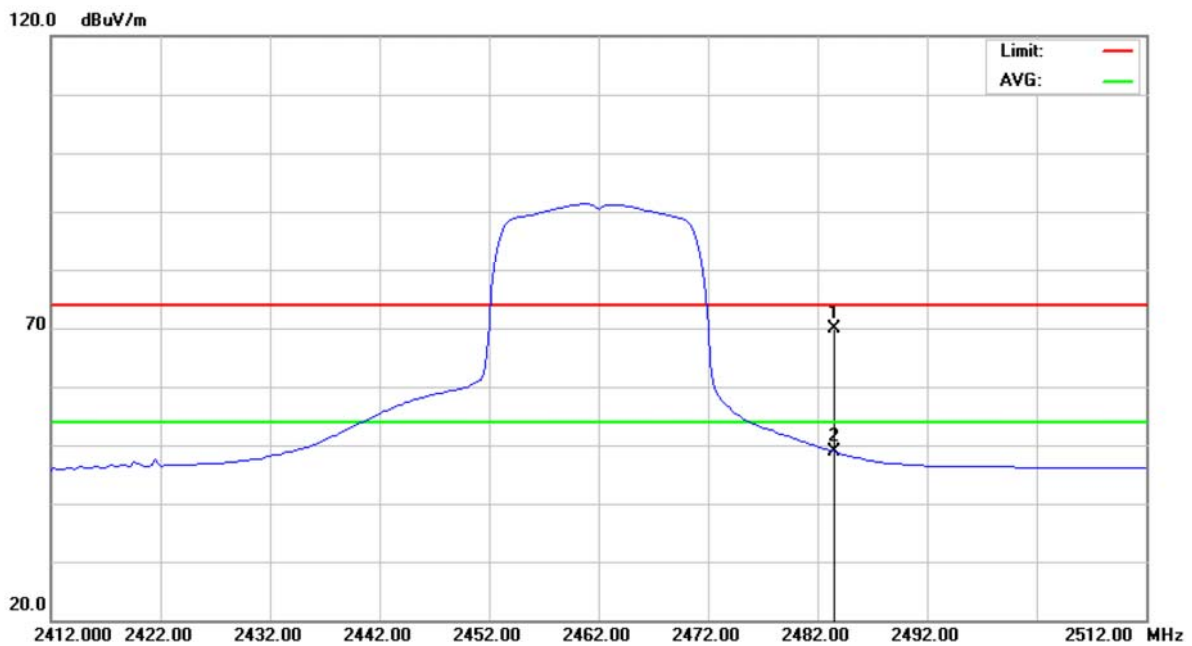


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	37.76	32.09	69.85	74.00	-4.15	peak	
2		2483.500	16.76	32.09	48.85	54.00	-5.15	AVG	



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.		

Polarization: Horizontal

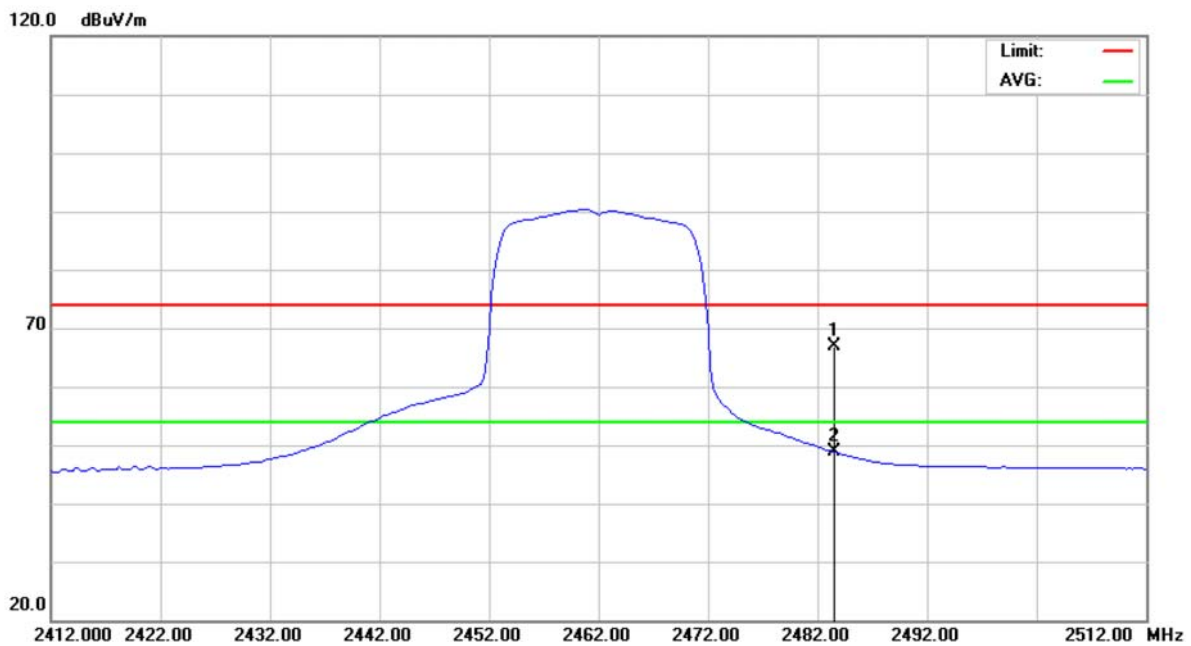

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2483.500	34.73	32.09	66.82	74.00	-7.18	peak	
2	*	2483.500	16.76	32.09	48.85	54.00	-5.15	AVG	

**10 POWER SPECTRAL DENSITY****10.1 LIMIT**

Test Item	Frequency Range (MHz)	Limit
Power Spectral Density	2400-2483.5	8 dBm (in any 3 kHz)

10.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-30	100854	Sep. 08, 2014

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

10.3 TEST PROCEDURES

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW=3 kHz, VBW=30 kHz, Sweep time = 500s.

10.4 TEST SETUP LAYOUT**10.5 DEVIATION FROM TEST STANDARD**

No deviation

10.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.




10.7 TEST RESULTS - 2400-2483.5 MHz

E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11b/2412 MHz, 2437 MHz, 2462 MHz		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-8.21	8	PASS
2437 MHz	-8.00	8	PASS
2462 MHz	-9.31	8	PASS

IEEE 802.11b/2412 MHz/Power Sepctral Density

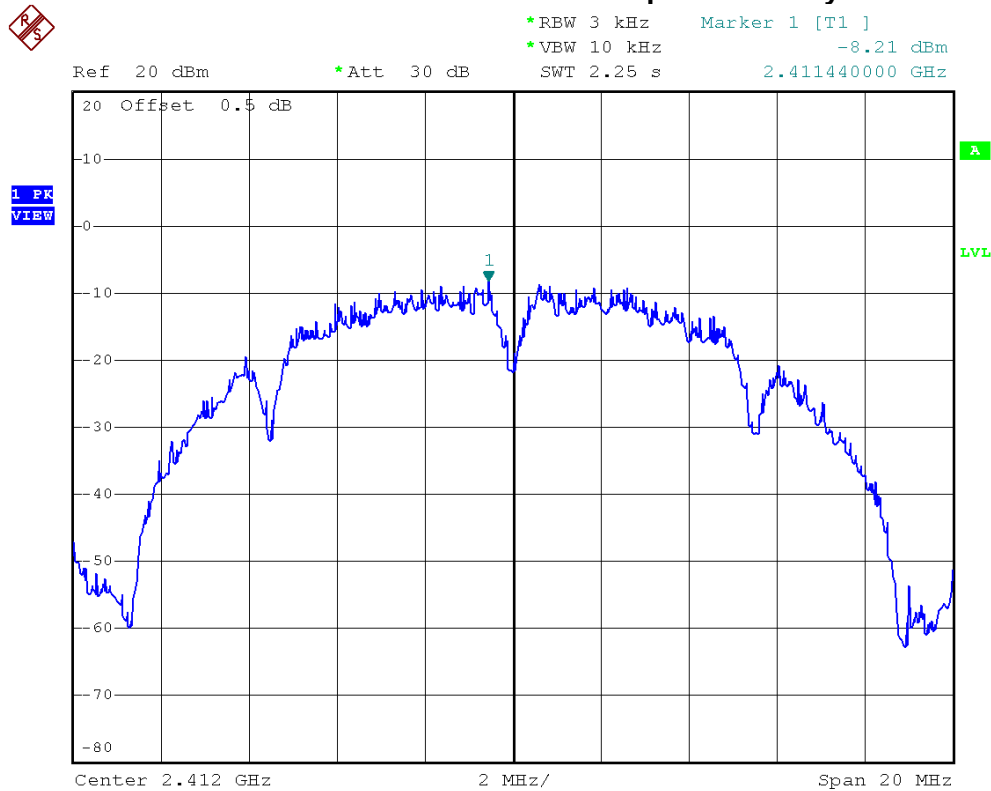



IEEE 802.11b/2437 MHz/Power Sepctral Density




*RBW 3 kHz Marker 1 [T1]
*VBW 10 kHz -8.00 dBm
SWT 2.25 s 2.435200000 GHz

Ref 20 dBm

*Att 30 dB

2.435200000 GHz

1 PK
VIEW

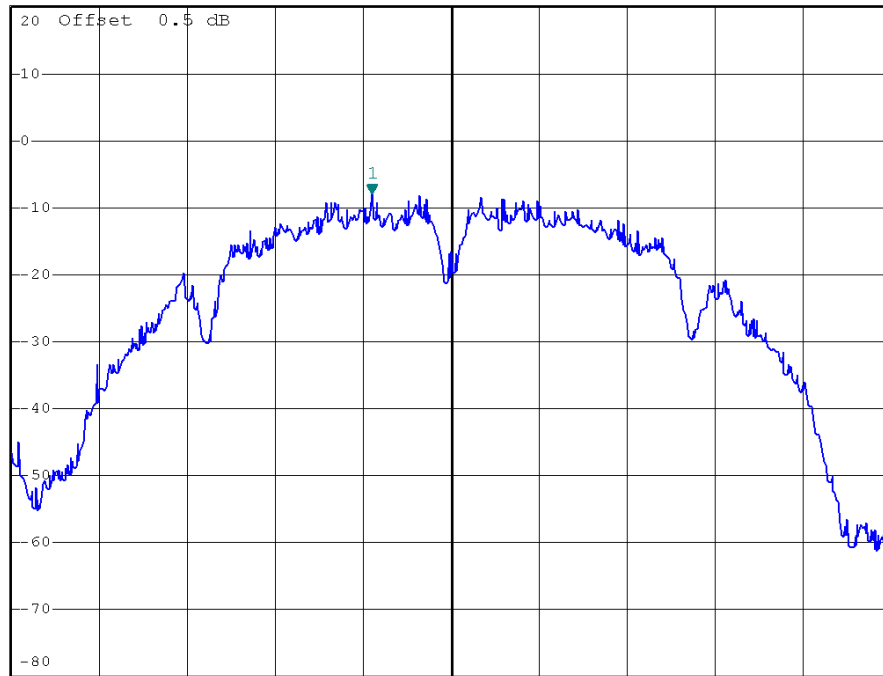

Center 2.437 GHz

2 MHz/

Span 20 MHz

IEEE 802.11b/2462 MHz/Power Sepctral Density




*RBW 3 kHz Marker 1 [T1]
*VBW 10 kHz -9.31 dBm
SWT 2.25 s 2.463800000 GHz

Ref 20 dBm

*Att 30 dB

2.463800000 GHz

1 PK
VIEW

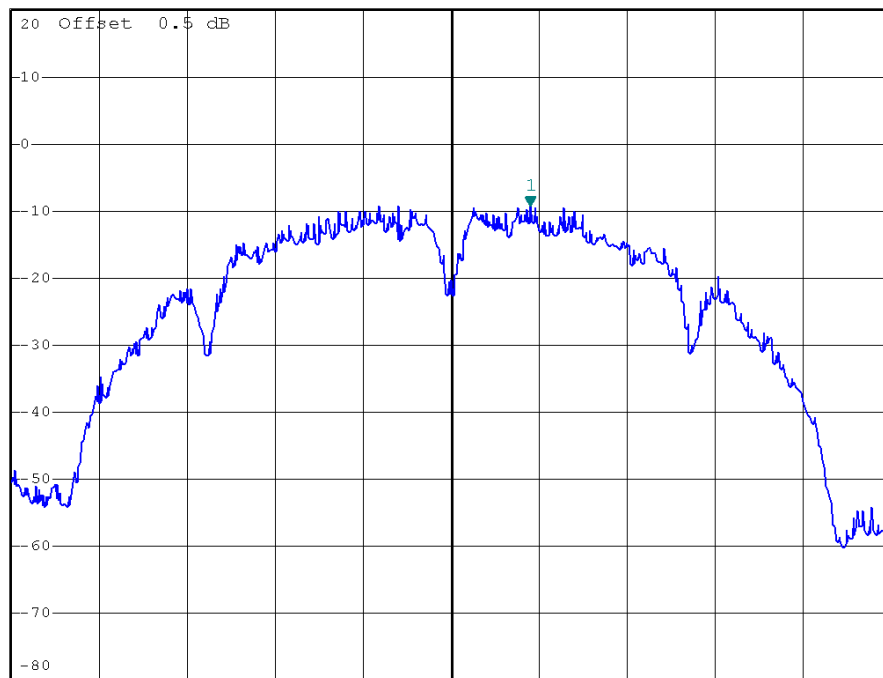

Center 2.462 GHz

2 MHz/


Span 20 MHz



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11g/2412 MHz, 2437 MHz, 2462 MHz		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-13.11	8	PASS
2437 MHz	-11.16	8	PASS
2462 MHz	-12.43	8	PASS

IEEE 802.11g/2412 MHz/Power Sepctral Density

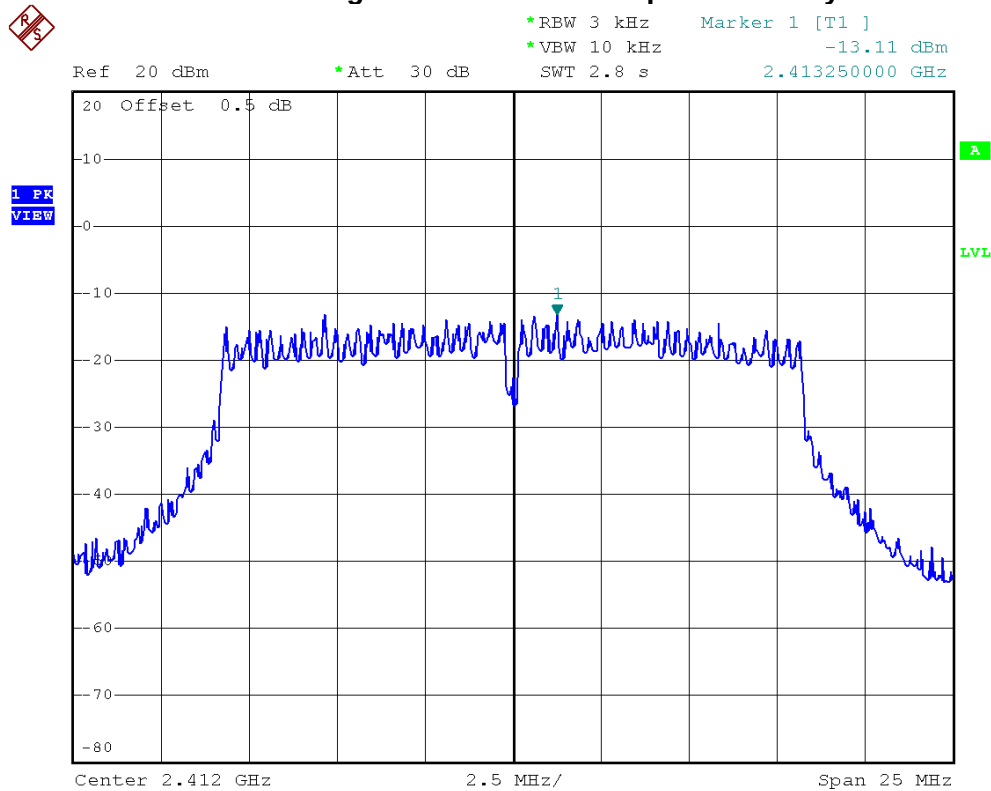



IEEE 802.11g/2437 MHz/Power Sepctral Density




*RBW 3 kHz Marker 1 [T1]
*VBW 10 kHz -11.16 dBm
SWT 2.8 s 2.438840000 GHz

Ref 20 dBm

*Att 30 dB

2.438840000 GHz

1 PK
VIEW

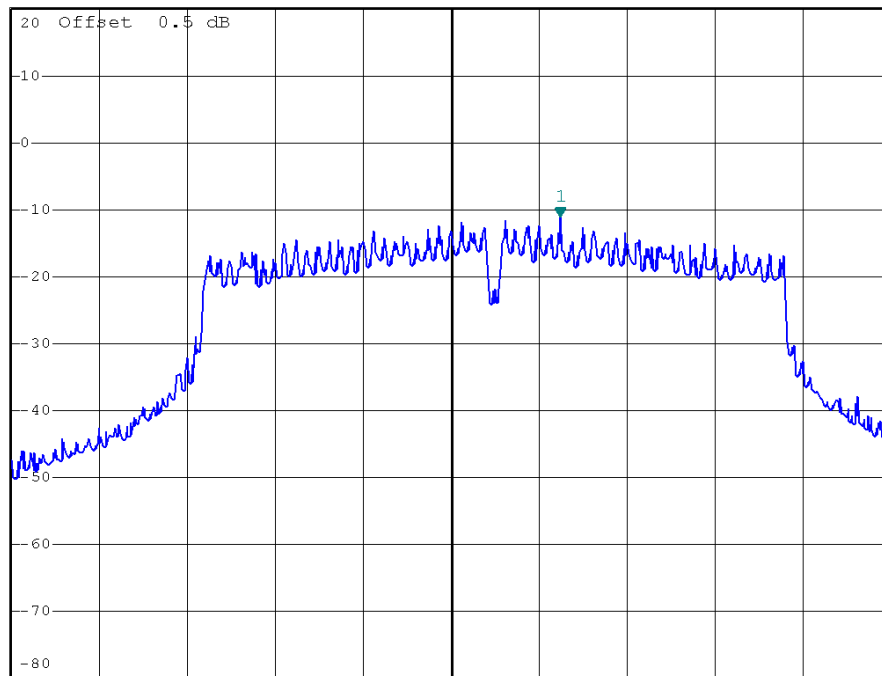

Center 2.43574 GHz

2.5 MHz/

Span 25 MHz

IEEE 802.11g/2462 MHz/Power Sepctral Density




*RBW 3 kHz Marker 1 [T1]
*VBW 10 kHz -12.43 dBm
SWT 2.8 s 2.459500000 GHz

Ref 20 dBm

*Att 30 dB

2.459500000 GHz

1 PK
VIEW

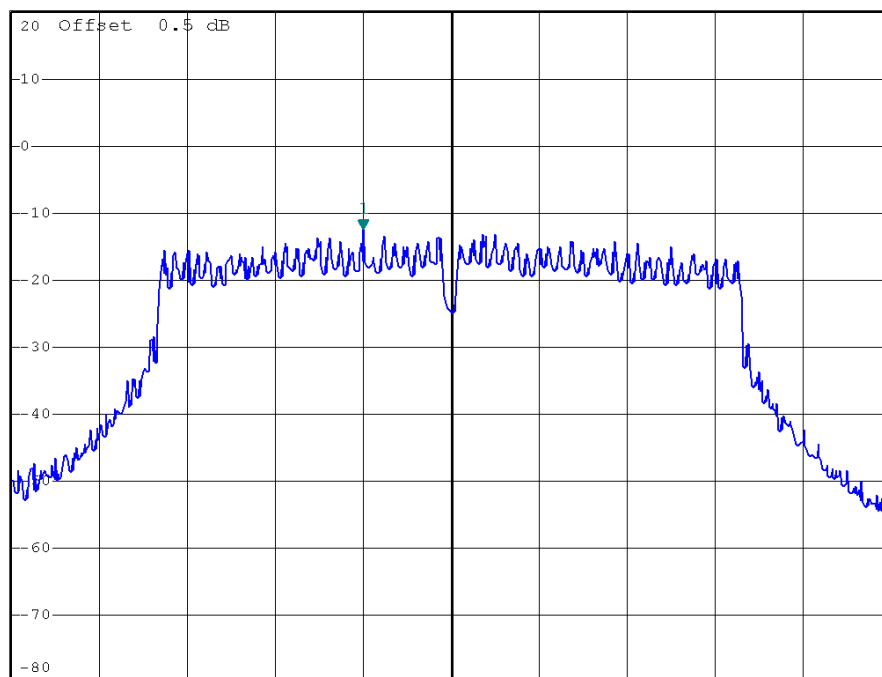

Center 2.462 GHz

2.5 MHz/


Span 25 MHz



E.U.T	Multi-functional Master Controller	Model Name	MT880
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/2412 MHz, 2437 MHz, 2462 MHz		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-12.95	8	PASS
2437 MHz	-10.82	8	PASS
2462 MHz	-11.93	8	PASS

IEEE 802.11n (20 MHz)/2412 MHz/Power Sepctral Density

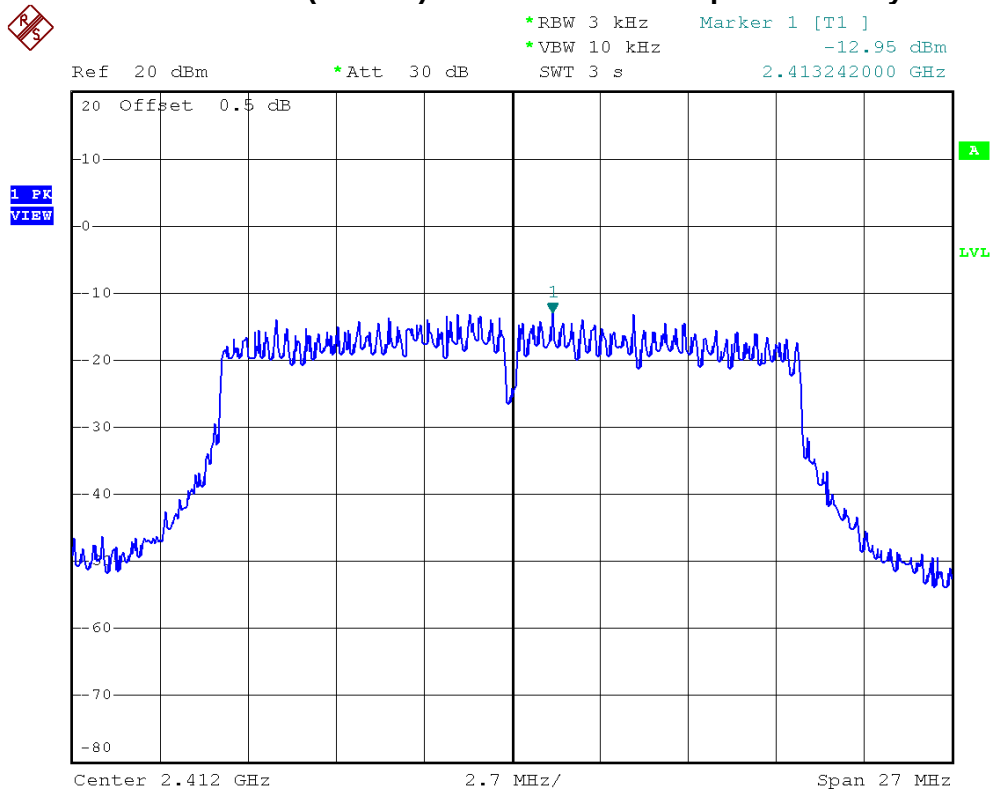



IEEE 802.11n (20 MHz)/2437 MHz/Power Sepctral Density




*RBW 3 kHz Marker 1 [T1]
*VBW 10 kHz -10.82 dBm
SWT 3 s 2.436730000 GHz

Ref 20 dBm

*Att 30 dB

2.436730000 GHz

1 PK
VIEW

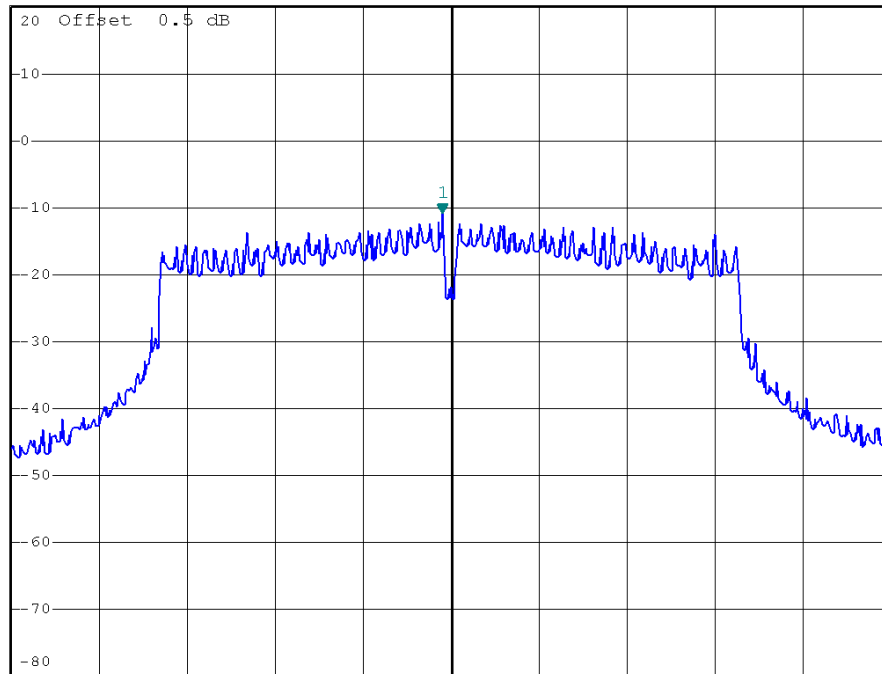

Center 2.437 GHz

2.7 MHz/

Span 27 MHz

IEEE 802.11n (20 MHz)/2462 MHz/Power Sepctral Density




*RBW 3 kHz Marker 1 [T1]
*VBW 10 kHz -11.93 dBm
SWT 3 s 2.463512000 GHz

Ref 20 dBm

*Att 30 dB

2.463512000 GHz

1 PK
VIEW

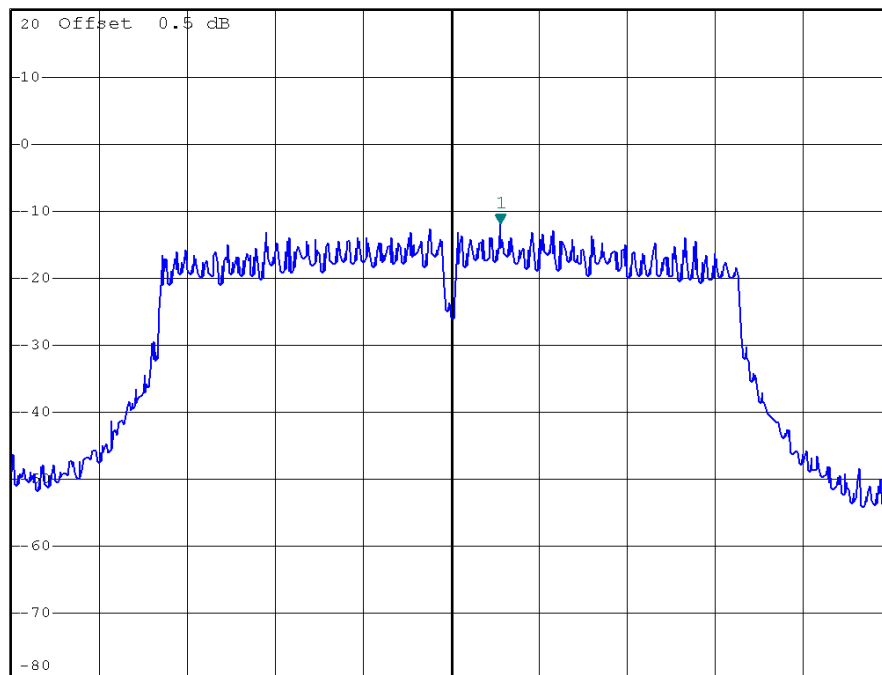

Center 2.462 GHz

2.7 MHz/

Span 27 MHz