



Wireless LAN Radio Test Report

FCC ID: HLEMT88MIFARE01

This report concerns (check one) : Original Grant Class I Change

Issued Date : Aug. 11, 2011
Project No. : R1103016
Equipment : A Versatile Multi-Function Terminal
Model Name : MT688; MT688-XXXXXG (X=0-9, A-Z, a-z or blank for marketing purpose only)
Applicant : unitech electronics co., ltd.
Address : 5F, No. 136, Lane 235, Pao-Chiao Rd., Hsin-Tien Dist., New Taipei City Taiwan

Tested by: Neutron Engineering Inc. EMC Laboratory

Date of Receipt: Mar. 23, 2011

Date of Test: Mar. 23, 2011 ~ Jun. 14, 2011

Testing Engineer

: Rush Kao
(Rush Kao)

Technical Manager

: Jeff Yang
(Jeff Yang)

Authorized Signatory

: Andy Chiu
(Andy Chiu)

Neutron Engineering Inc.

B1, No. 37, Lane 365, YangGuang St.

NeiHu District 114, Taipei, Taiwan.

TEL: +886-2-2657-3299

FAX: +886-2-2657-3331



NVLAP
Lab Code: 200145-0



ILAC-MRA



TAF
Testing Laboratory
0659



Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron**'s authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	11
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF RADIATED EMISSION TESTED	12
3.5 DESCRIPTION OF SUPPORT UNITS	13
4 . EMC EMISSION TEST	14
4.1 CONDUCTED EMISSION MEASUREMENT	14
4.1.1 POWER LINE CONDUCTED EMISSION	14
4.1.2 MEASUREMENT INSTRUMENTS LIST	14
4.1.3 TEST PROCEDURE	15
4.1.4 DEVIATION FROM TEST STANDARD	15
4.1.5 TEST SETUP	15
4.1.6 EUT OPERATING CONDITIONS	16
4.1.7 TEST RESULTS	17
4.2 RADIATED EMISSION MEASUREMENT	19
4.2.1 RADIATED EMISSION LIMITS	19
4.2.2 MEASUREMENT INSTRUMENTS LIST	20
4.2.3 TEST PROCEDURE	20
4.2.4 DEVIATION FROM TEST STANDARD	20
4.2.5 TEST SETUP	21
4.2.6 EUT OPERATING CONDITIONS	21
4.2.7 TEST RESULTS-BETWEEN 30MHZ - 1000MHZ - TX	22
4.2.8 TEST RESULTS - ABOVE 1000MHZ- TX	24
4.2.9 TEST RESULTS-RESTRICTED BANDS REQUIREMENTS	48
5 . BANDWITH TEST	56
5.1 APPLIED PROCEDURES / LIMIT	56
5.1.1 MEASUREMENT INSTRUMENTS LIST	56
5.1.2 TEST PROCEDURE	56
5.1.3 DEVIATION FROM STANDARD	56
5.1.4 TEST SETUP	56
5.1.5 EUT OPERATION CONDITIONS	56



Table of Contents	Page
5.1.6 TEST RESULTS	57
6 . PEAK OUTPUT POWER TEST	61
6.1 APPLIED PROCEDURES / LIMIT	61
6.1.1 MEASUREMENT INSTRUMENTS LIST	61
6.1.2 TEST PROCEDURE	61
6.1.3 DEVIATION FROM STANDARD	61
6.1.4 TEST SETUP	61
6.1.5 EUT OPERATION CONDITIONS	61
6.1.6 TEST RESULTS	62
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	64
7.1 APPLIED PROCEDURES / LIMIT	64
7.1.1 MEASUREMENT INSTRUMENTS LIST	64
7.1.2 TEST PROCEDURE	64
7.1.3 DEVIATION FROM STANDARD	64
7.1.4 TEST SETUP	64
7.1.5 EUT OPERATION CONDITIONS	64
7.1.6 TEST RESULTS	65
8 . POWER SPECTRAL DENSITY TEST	73
8.1 APPLIED PROCEDURES / LIMIT	73
8.1.1 MEASUREMENT INSTRUMENTS LIST	73
8.1.2 TEST PROCEDURE	73
8.1.3 DEVIATION FROM STANDARD	73
8.1.4 TEST SETUP	73
8.1.5 EUT OPERATION CONDITIONS	73
8.1.6 TEST RESULTS	74
9 . RF EXPOSURE TEST	78
9.1 APPLIED PROCEDURES / LIMIT	78
9.1.1 MEASUREMENT INSTRUMENTS LIST	78
9.1.2 MPE CALCULATION METHOD	78
9.1.3 DEVIATION FROM STANDARD	79
9.1.4 TEST SETUP	79
9.1.5 EUT OPERATION CONDITIONS	79
9.1.6 TEST RESULTS	80
10 . EUT TEST PHOTO	82

**1. CERTIFICATION**

Equipment: A Versatile Multi-Function Terminal

Brand Name: unitech

Model Name: MT688; MT688-XXXXXG (X=0-9, A-Z, a-z or blank for marketing purpose only)

Applicant: unitech electronics co., ltd.

Date of Test: Mar. 23, 2011 ~ Jun. 14, 2011

Standards: FCC Part15, Subpart C / ANCI C63.4 : 2003

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-R1103016) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP and TAF according to the ISO-17025 quality assessment standard and technical standard(s).



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (c)	Antenna conducted Spurious Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	PASS	

NOTE:

- (1)" N/A" denotes test is not applicable in this Test Report
- (2) Portable device; SAR report is required.



2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

C02: (VCCI RN: C-3477; FCC RN: 614388; FCC DN: TW1054)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

CB08: (VCCI RN: G-91; FCC RN: 614388; FCC DN: TW1054;
IC Assigned Code: 4428C-1)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)	NOTE
C02	ANSI	150 kHz ~ 30 MHz	2.59	

B. Radiated Measurement :

Test Site	Item	Measurement Frequency Range	Uncertainty	NOTE
CB08	Radiated emission at 3m	Horizontal Polarization	30 - 00MHz	3.35 dB
			200 - 1000MHz	3.11 dB
			1 - 18GHz	3.97 dB
			18 - 40GHz	4.01 dB
	Radiated emission at 3m	Vertical Polarization	30 - 200MHz	3.22 dB
			200 - 1000MHz	3.24 dB
			1 - 18GHz	4.05 dB
			18 - 40GHz	4.04 dB

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our U_{lab} values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called U_{CISPR} , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz : 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz : 5.2 dB

It can be seen that our U_{lab} values are smaller than U_{CISPR} .



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	A Versatile Multi-Function Terminal
Brand Name	unitech
Model Name	MT688; MT688-XXXXXG (X=0-9, A-Z, a-z or blank for marketing purpose only)
OEM Brand	TASHI
Model Difference	Model MT688-XXXXXG, X may be 0-9, A-Z, a-z or blank for marketing purpose only. Models' differences between each other only the changes of model name which do not affect the EMI performance. Model MT688 was used for final testing and collecting test data included in this report.
Product Description	The EUT is a A Versatile Multi-Function Terminal. Operation Frequency: 2412~2462 MHz Modulation Type: OFDM, DSSS, CCK, DQPSK and DBPSK Bit Rate of Transmitter: 802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps Number Of Channel Please see Note 2. Antenna Designation: Please see Note 3. Antenna Gain(Peak) Please see Note 3. Peak Output 802.11b: 13.28 dBm (Max.) Power(Max): 802.11g: 23.32 dBm (Max.) Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.
Power Source	DC Voltage supplied from SWITCHING ADAPTER or PoE.
Power Rating	SWITCHING ADAPTER: I/P: AC 100-240V~1.0A MAX, 50-60Hz / O/P: DC +12V, 2.0A, 24W MAX. PoE: DC 48V
Connecting I/O Port(s)	Please refer to the User's Manual
Products Covered	SWITCHING ADAPTER: Sunny / SYS1319-2412-T3
EUT Modification(s)	N/A



Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	06	2437	11	2462
02	2417	07	2442		
03	2422	08	2447		
04	2427	09	2452		
05	2432	10	2457		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	Joymax	IFF-3105MPAX-763	PIFA	U.FL	0



3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Test Mode	Description
Mode 1	802.11b/CH01, CH06, CH11
Mode 2	802.11g/CH01, CH06, CH11

For Conducted Test	
Final Test Mode	Description
Mode 1	802.11b/CH06

For Radiated Test	
Final Test Mode	Description
Mode 1	802.11b/CH01, CH06, CH11
Mode 2	802.11g/CH01, CH06, CH11




3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product

Test software Version	RT3052QA		
Frequency (MHz)	2412 MHz	2442 MHz	2462 MHz
IEEE 802.11b DSSS	14	14	14
IEEE 802.11g OFDM	14	14	14



3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF RADIATED EMISSION TESTED

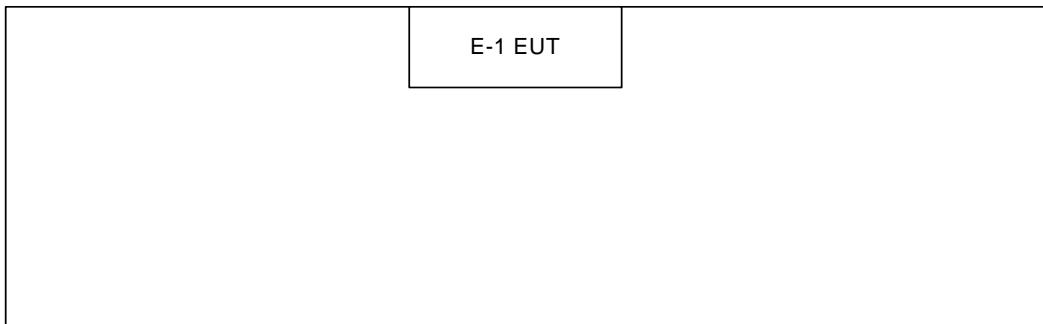



3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	A Versatile Multi-Function Terminal	unitech	MT688	HLEMT88MIFARE01	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
N/A	-	-	-	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) " * " denotes the support equipment by applicant.



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
Margin Level = Measurement Value – Limit Value

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	Jun. 07, 2011
2	Test Cable	TIMES	CFD300-NL	130	Jun. 17, 2011
3	EMI Test Receiver	R&S	ESCI	100080	Mar. 15, 2012

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.


4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

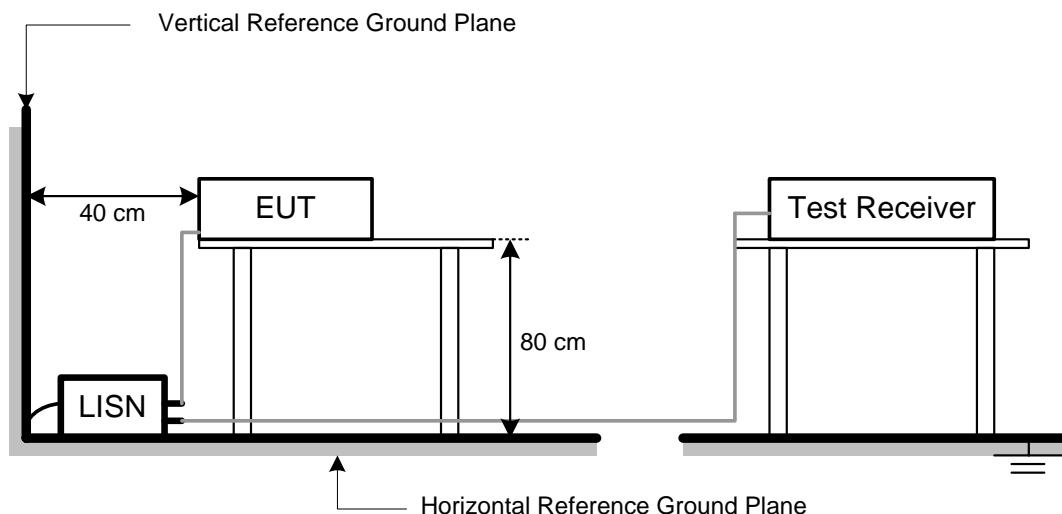



4.1.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


**4.1.7 TEST RESULTS**

EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	36%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH06		

Freq. (MHz)	Terminal L/N	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV)		Limit(dBuV)		Margin (dB)	Note
		QP-Mode	AV-Mode		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.1500	Line	41.06	*	9.69	50.75	*	66.00	56.00	-15.25	(QP)
0.2682	Line	31.63	*	9.69	41.32	*	61.17	51.17	-19.85	(QP)
0.9950	Line	26.74	*	9.79	36.53	*	56.00	46.00	-19.47	(QP)
2.5069	Line	27.80	*	9.71	37.51	*	56.00	46.00	-18.49	(QP)
5.8500	Line	30.18	*	9.73	39.91	*	60.00	50.00	-20.09	(QP)
14.1500	Line	32.24	*	9.85	42.09	*	60.00	50.00	-17.91	(QP)

Remark

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9 kHz; SPA setting in RBW=10 kHz, VBW =10 kHz, Swp. Time = 0.2 sec./ MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10 kHz, VBW=10 kHz, Swp. Time =0.2 sec./ MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of Note. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (3) In the “Note” column, QP means the margin value of QP is higher than Average and the “Margin” column shows the margin value of QP; AV means the margin value of Average is higher than QP and the “Margin” column shows the margin value of Average.

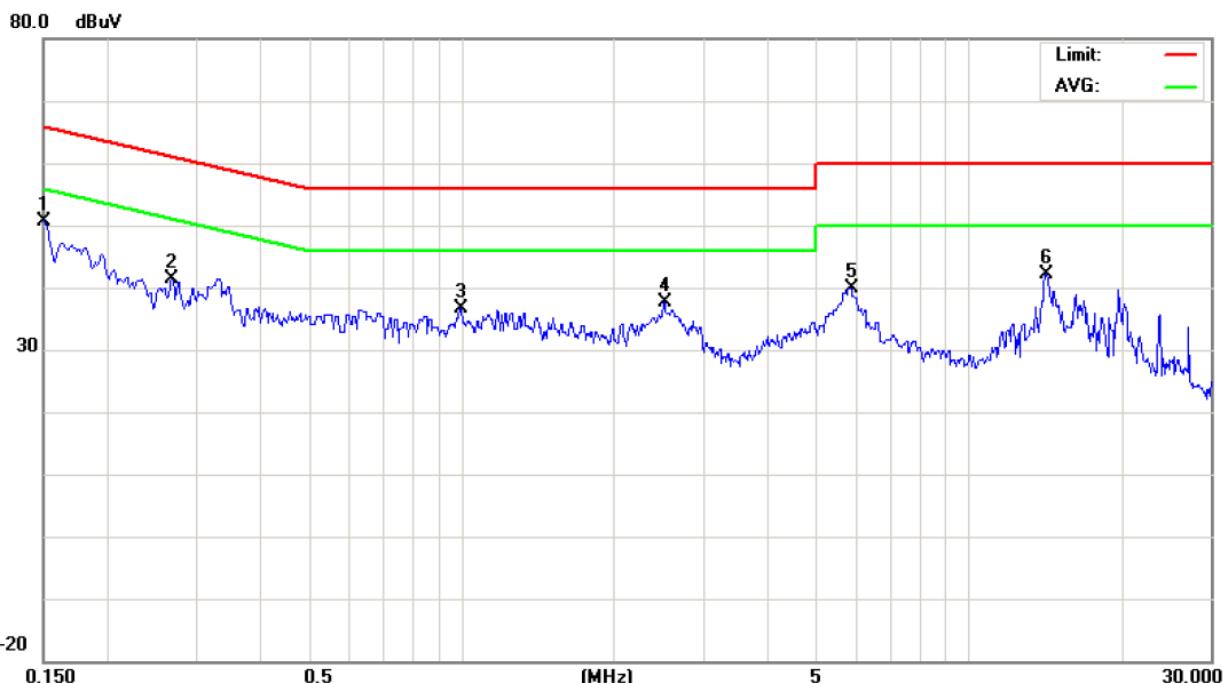




EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	36%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH06		

Freq. (MHz)	Terminal L/N	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV)		Limit(dBuV)		Margin (dB)	Note
		QP-Mode	AV-Mode		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.1576	Neutral	39.29	*	9.68	48.97	*	65.59	55.59	-16.62	(QP)
0.8330	Neutral	27.20	*	9.75	36.95	*	56.00	46.00	-19.05	(QP)
2.6689	Neutral	27.24	*	9.70	36.94	*	56.00	46.00	-19.06	(QP)
5.6500	Neutral	30.15	*	9.73	39.88	*	60.00	50.00	-20.12	(QP)
14.2000	Neutral	32.15	*	9.88	42.03	*	60.00	50.00	-17.97	(QP)
16.2500	Neutral	30.02	*	9.91	39.93	*	60.00	50.00	-20.07	(QP)

Remark

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9 kHz; SPA setting in RBW=10 kHz, VBW =10 kHz, Swp. Time = 0.2 sec./ MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10 kHz, VBW=10 kHz, Swp. Time =0.2 sec./ MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of Note. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (3) In the “Note” column, QP means the margin value of QP is higher than Average and the “Margin” column shows the margin value of QP; AV means the margin value of Average is higher than QP and the “Margin” column shows the margin value of Average.

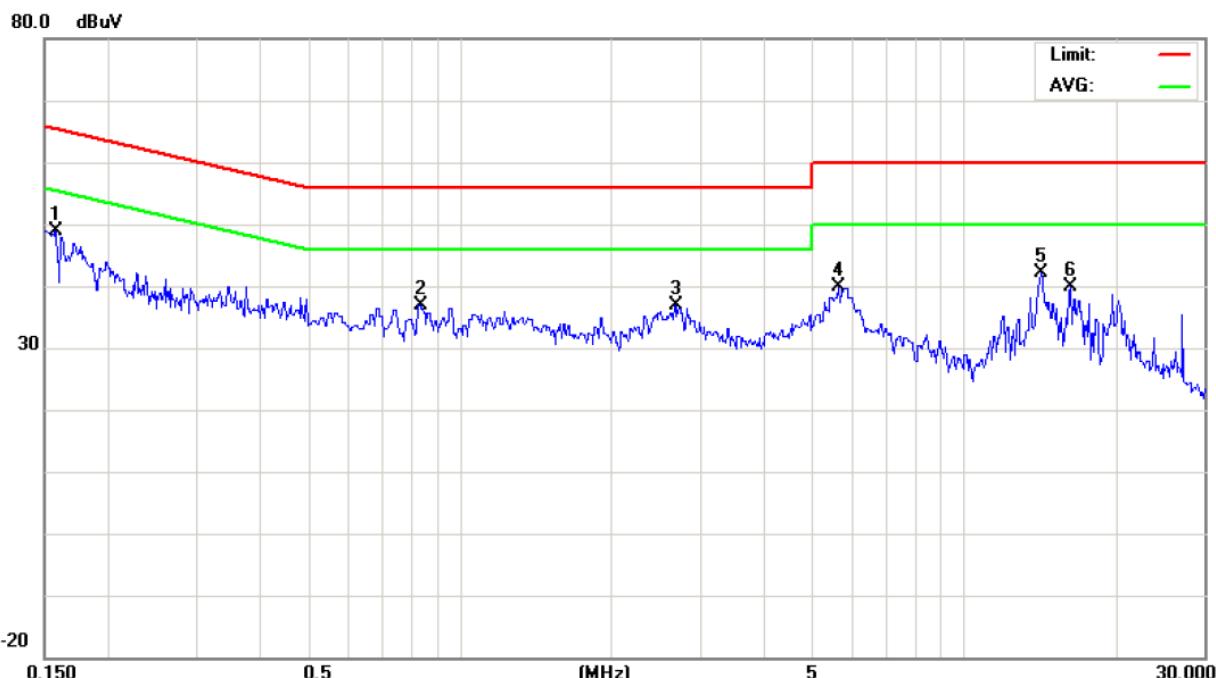



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

**4.2.2 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Aug. 31, 2011
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Dec. 08, 2011
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 18, 2012
4	Microflex Cable	N/A	N/A	1m	May. 18, 2012
5	Microflex Cable	AISI	S104-SMAP-1	10m	Aug. 22, 2011
6	Microflex Cable	N/A	N/A	3m	Aug. 22, 2011
7	Test Cable	N/A	LMR-400	966_12m	Jun. 17, 2011
8	Test Cable	N/A	LMR-400	966_3m	Jun. 17, 2011
9	Pre-Amplifier	EMC	EMC-330	980001	Jun. 03, 2011
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 17, 2011

Remark: " N/A" denotes No Model Name / Serial No. and No Calibration specified.



4.2.3 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m Semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. The testing follows the guidelines in ANSI C63.4-2003 and FCC Public Notice DA 00-705 Measurement Guidelines. In case the emission is fail due to the used RBW / VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

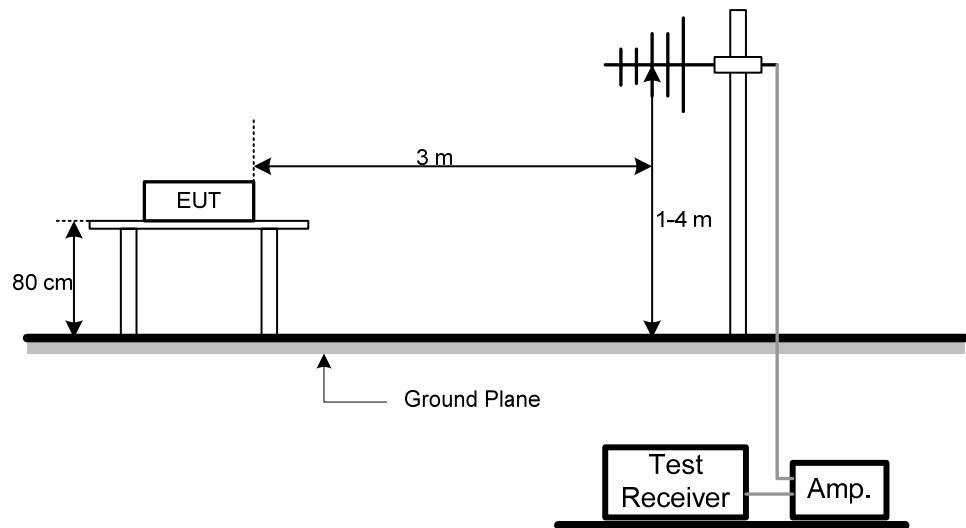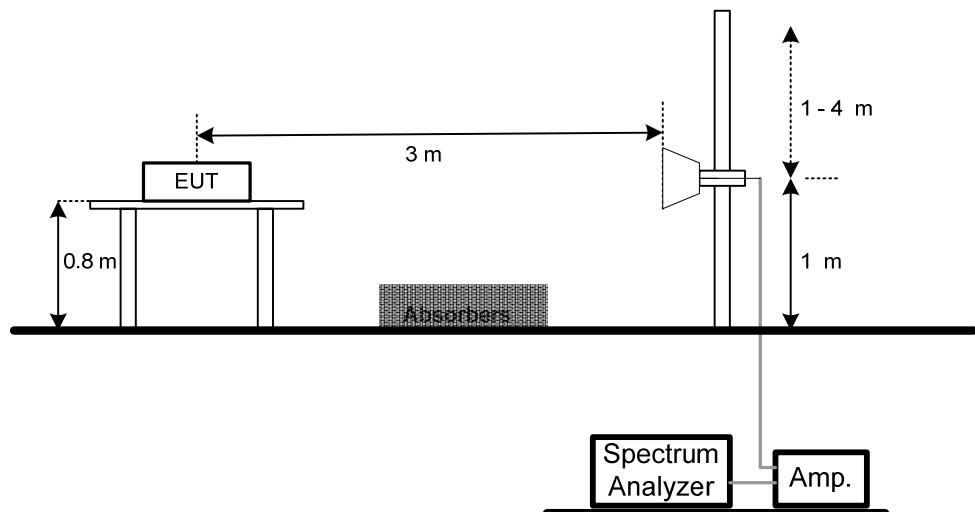Radiated Emission Test Set-Up Frequency 30 - 1000MHz**Radiated Emission Test Set-Up Frequency Above 1 GHz**

4.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.


**4.2.7 TEST RESULTS-BETWEEN 30MHZ - 1000MHZ - TX**

EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH06		

Freq. (MHz)	Polarization H/V	Reading Level (dBuV)	Correct Factor(dB)	Measurement (dBuV/m)	Limit(Quasi-Peak) (dBuV/m)	Margin (dB)	Note
70.7400	V	62.78	-29.11	33.67	40.00	- 6.33	
144.4600	V	67.18	-28.85	38.33	43.50	- 5.17	
191.0200	V	62.40	-28.66	33.74	43.50	- 9.76	
288.0200	V	64.65	-28.39	36.26	46.00	- 9.74	
311.3000	V	66.89	-28.30	38.59	46.00	- 7.41	
359.8000	V	65.46	-28.06	37.40	46.00	- 8.60	

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (4) Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode or QP detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

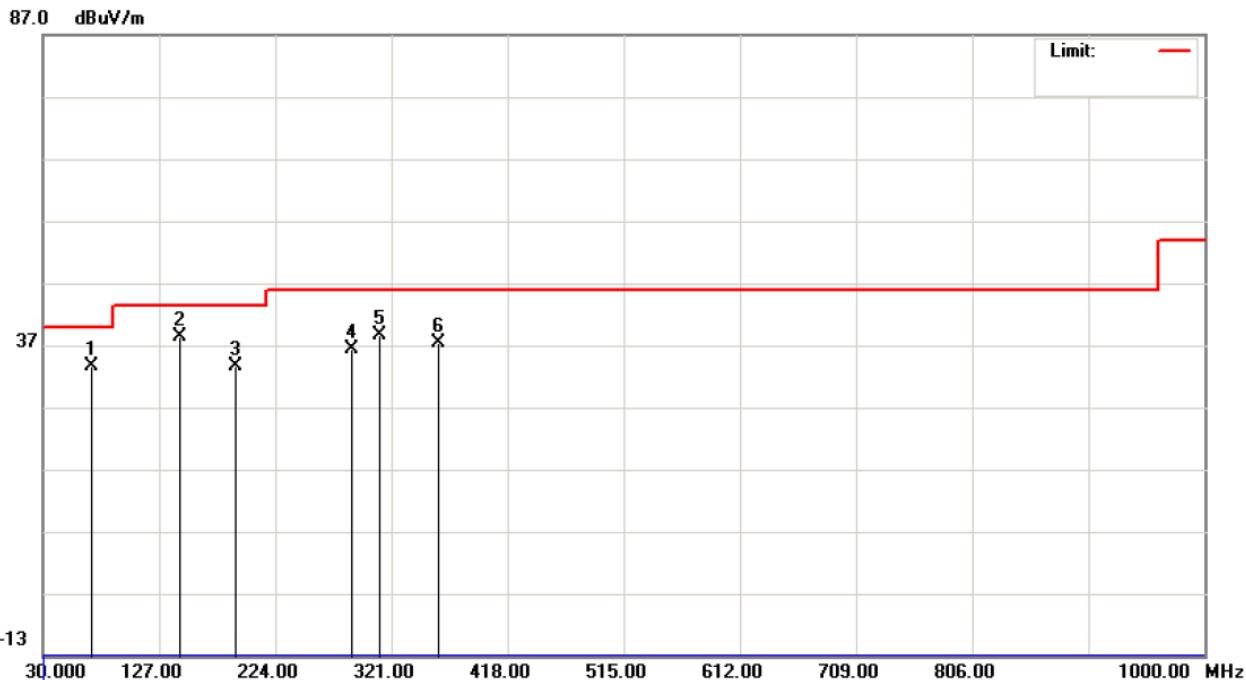




EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH06		

Freq. (MHz)	Polarization H/V	Reading Level (dBuV)	Correct Factor(dB)	Measurement (dBuV/m)	Limit(Quasi-Peak) (dBuV/m)	Margin (dB)	Note
142.5200	H	62.76	-28.86	33.90	43.50	- 9.60	(QP)
191.0200	H	62.62	-28.66	33.96	43.50	- 9.54	(QP)
262.8000	H	71.27	-28.49	42.78	46.00	- 3.22	
288.0200	H	62.30	-28.39	33.91	46.00	- 12.09	(QP)
311.3000	H	62.33	-28.30	34.03	46.00	- 11.97	(QP)
359.8000	H	61.08	-28.06	33.02	46.00	- 12.98	(QP)

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency◦“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency.
- (4) Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode or QP detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

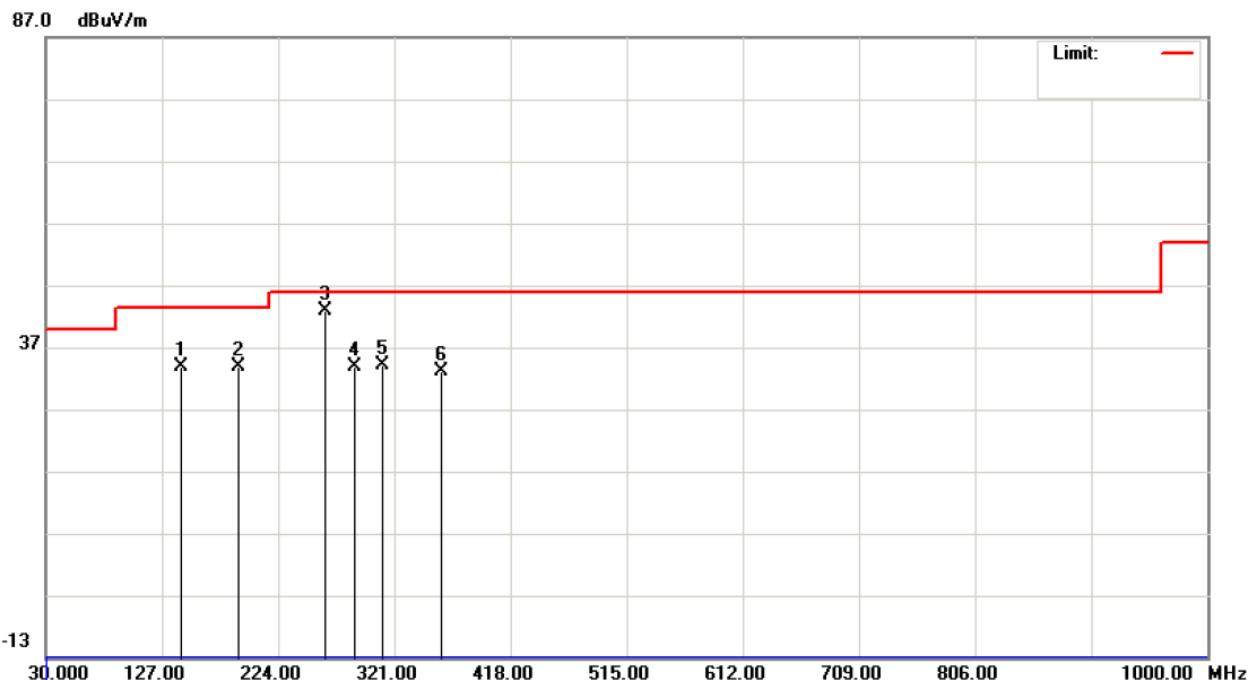

**4.2.8 TEST RESULTS - ABOVE 1000MHZ- TX**

EUT :	A Versatile Multi-Function Terminal			Model Name :	MT688			
Temperature :	25 °C			Relative Humidity :	31%			
Test Voltage :	AC 120V/60Hz			Orthogonal Axes:	X			
Test Mode :	802.11b/CH01							

Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
E	2390.000	V	23.62	11.90	30.89	54.51	42.79	74.00	54.00	- 11.21	AV
F	2412.800	V	67.51	63.73	30.98	98.49	94.71				
H	4823.950	V	46.99	39.05	2.70	49.69	41.75	74.00	54.00	- 12.25	AV
H	7236.000	V	44.26	30.33	8.31	52.57	38.64	74.00	54.00	- 15.36	AV



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency◦“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11b/CH01(Above 1000 MHz, Vertical)

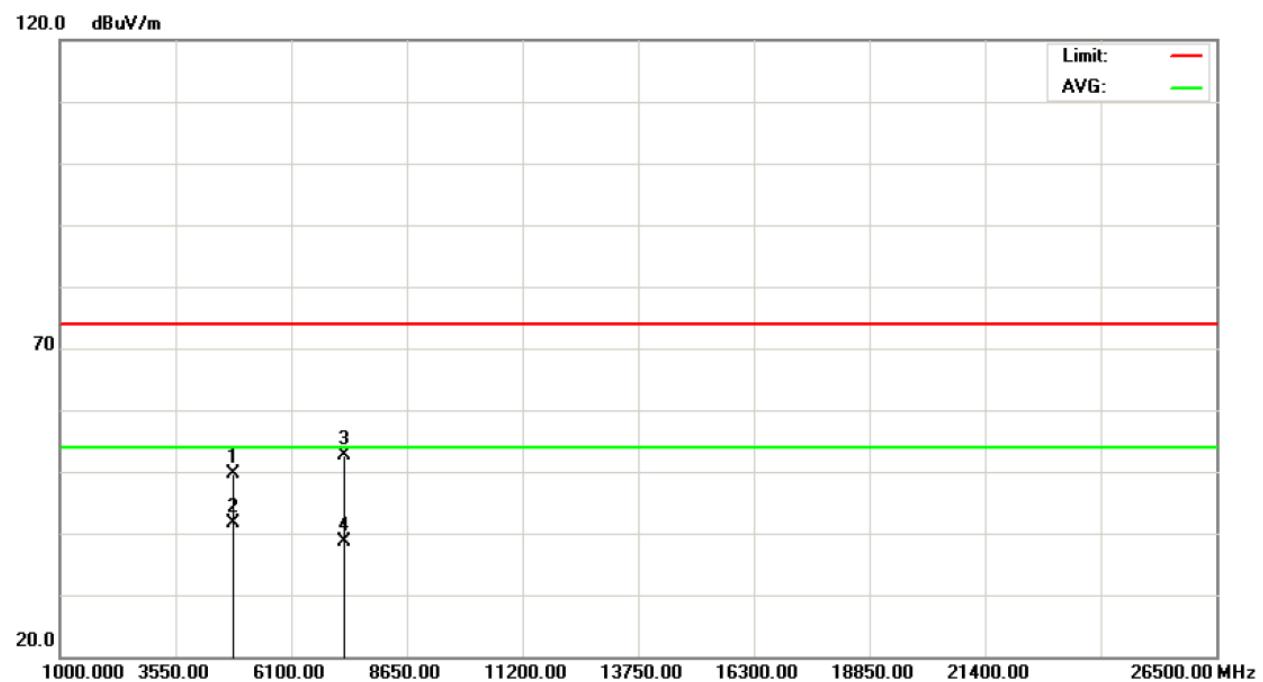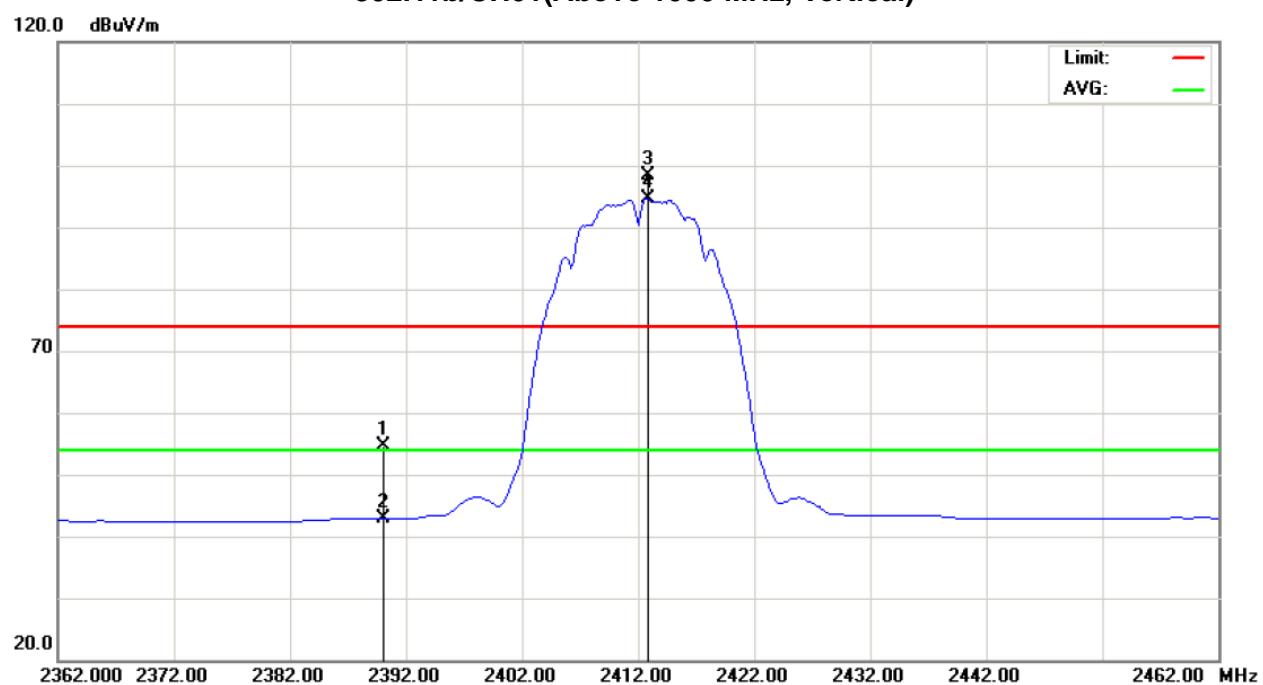



EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz	Orthogonal Axes:	X
Test Mode :	802.11b/CH01		

Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
E	2390.000	H	24.15	13.14	30.89	55.04	44.03	74.00	54.00	- 9.97	AV
F	2412.800	H	72.54	68.75	30.98	103.52	99.73				
H	4823.950	H	47.32	39.72	2.70	50.02	42.42	74.00	54.00	- 11.58	AV
H	7236.000	H	44.74	30.24	8.31	53.05	38.55	74.00	54.00	- 15.45	AV



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11b/CH01(Above 1000 MHz, Horizontal)

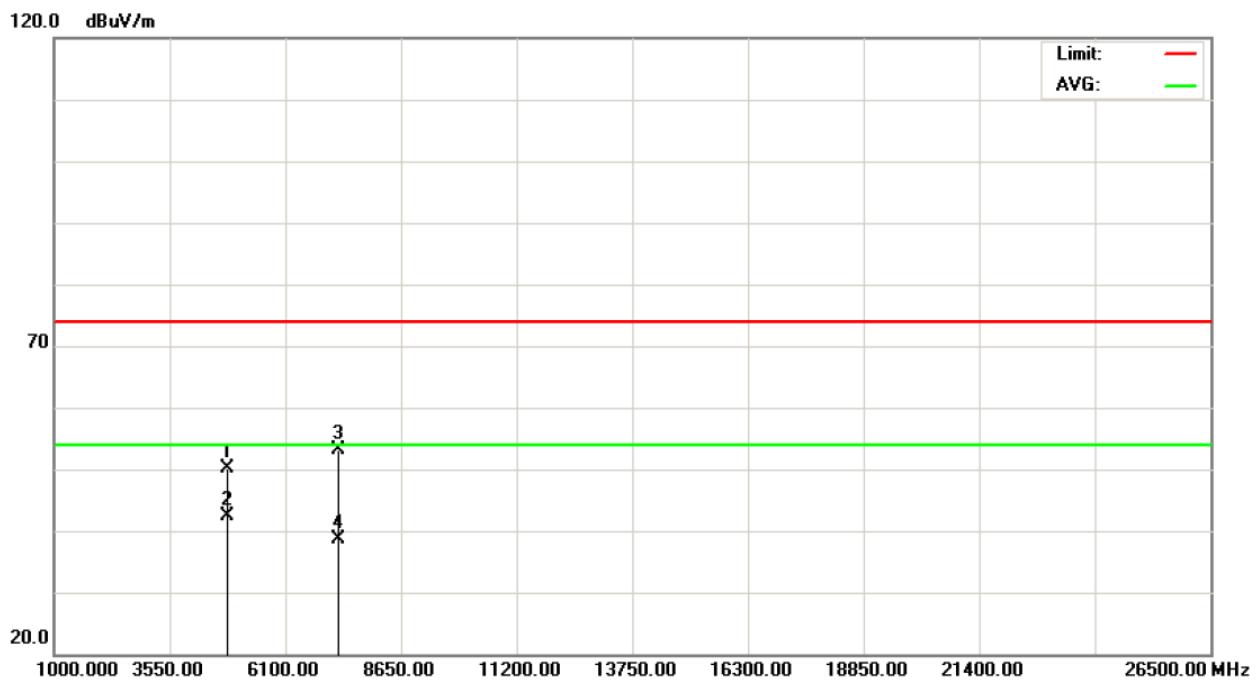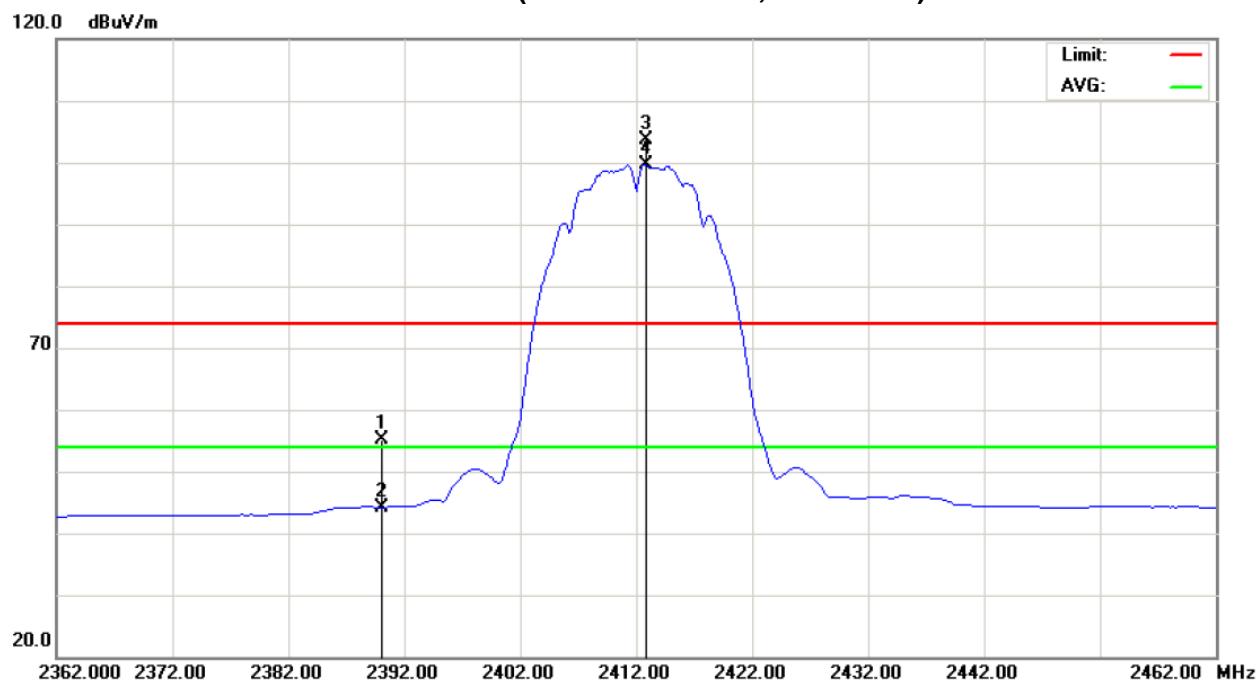



EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz	Orthogonal Axes:	X
Test Mode :	802.11b/CH06		

Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2436.200	V	68.66	5.00	31.08	99.74	36.08				
H	4873.990	V	48.14	40.00	2.87	51.01	42.87	74.00	54.00	- 11.13	AV
H	7312.130	V	45.22	30.98	8.41	53.63	39.39	74.00	54.00	- 14.61	AV



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11b/CH06 (Above 1000 MHz, Vertical)

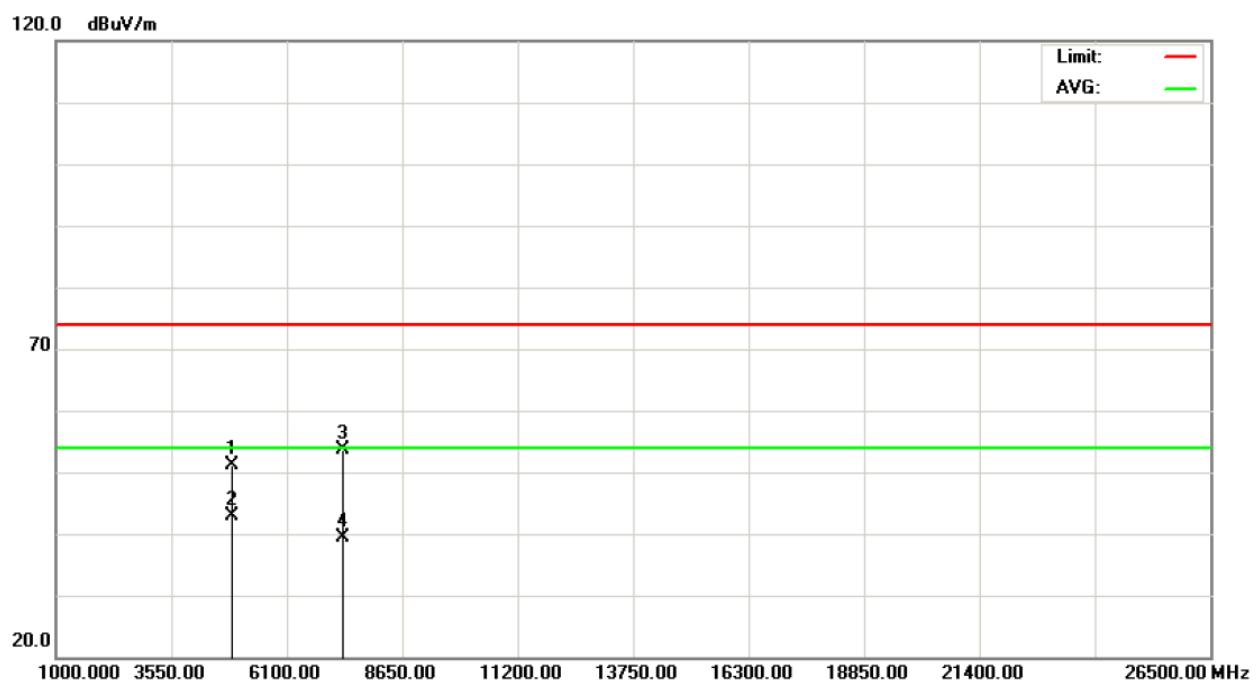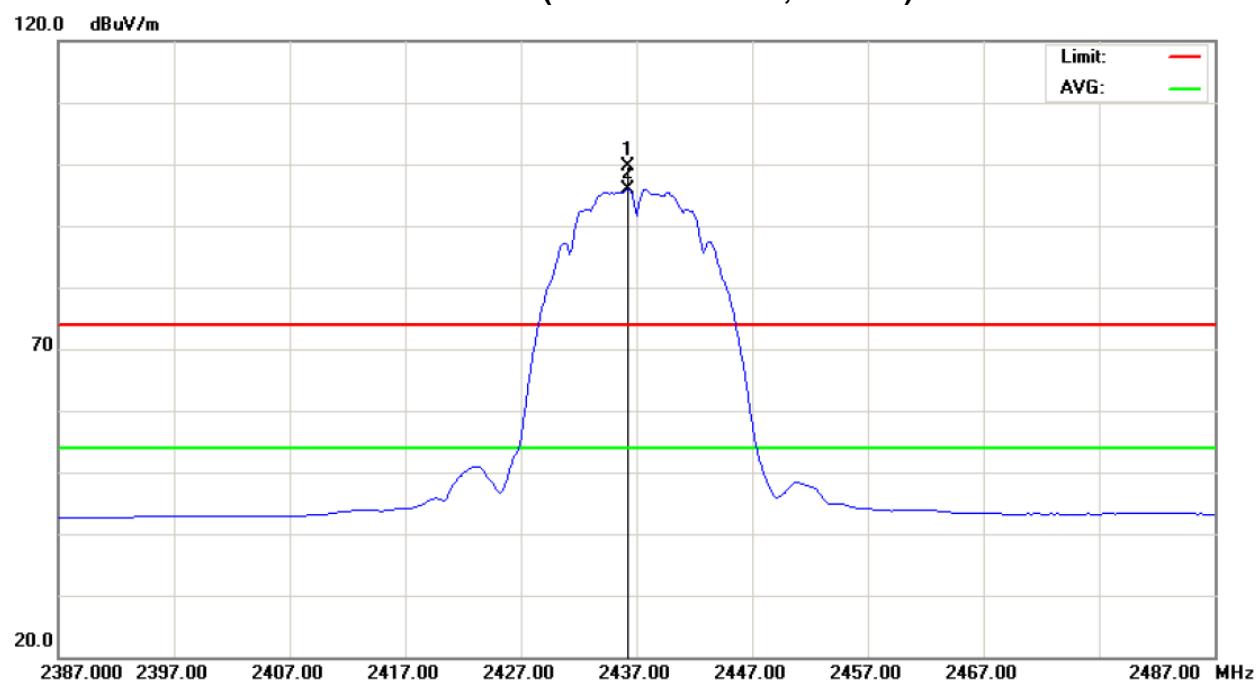



EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz	Orthogonal Axes:	X
Test Mode :	802.11b/CH06		

Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2436.200	H	76.30	72.48	31.08	107.38	103.56				
H	4873.970	H	47.24	39.31	2.87	50.11	42.18	74.00	54.00	- 11.82	AV
H	7310.940	H	45.14	30.70	8.41	53.55	39.11	74.00	54.00	- 14.89	AV



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11b/CH06 (Above 1000 MHz, Horizontal)

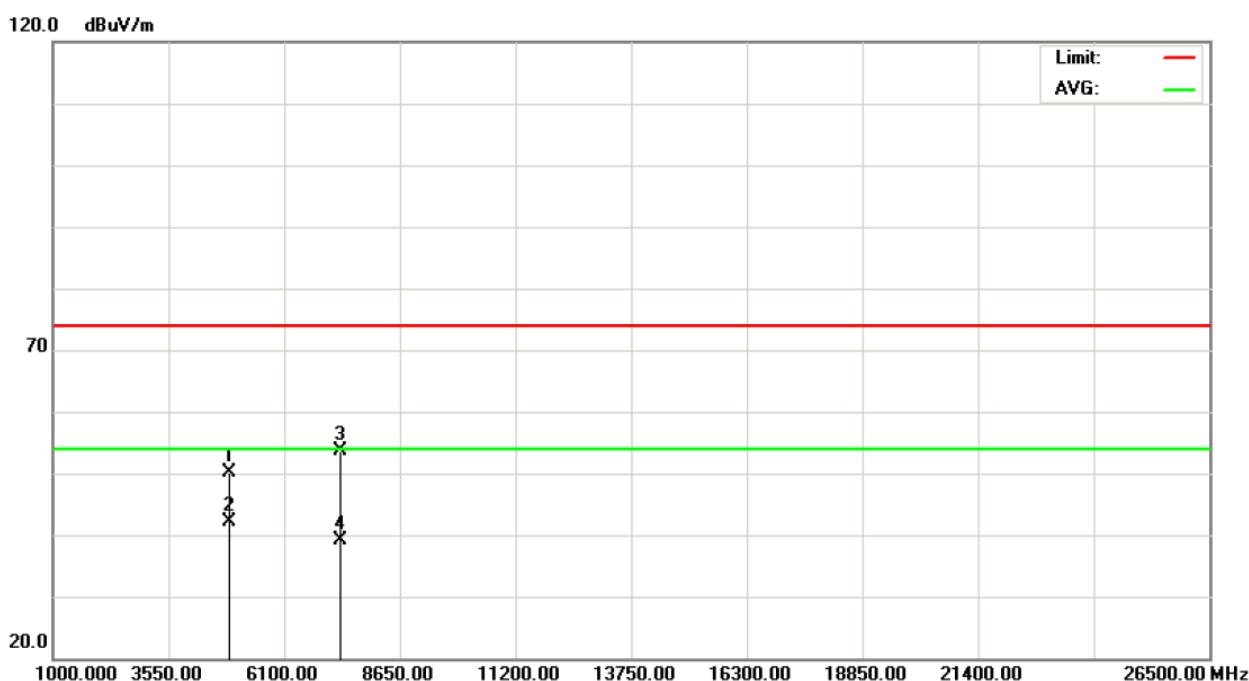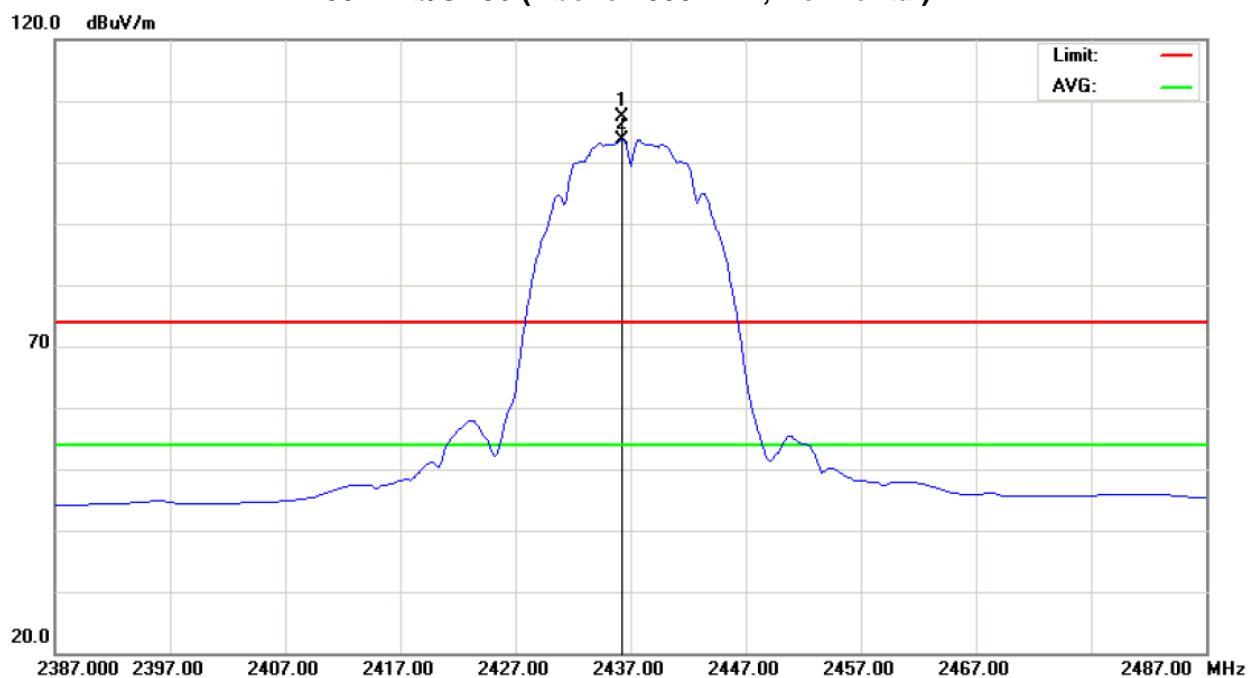



EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz	Orthogonal Axes:	X
Test Mode :	802.11b/CH11		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2462.800	V	68.59	64.78	31.19	99.78	95.97				
E	2483.500	V	24.41	12.68	31.28	55.69	43.96	74.00	54.00	- 10.04	AV
H	4923.950	V	48.59	42.32	3.03	51.62	45.35	74.00	54.00	- 8.65	AV
H	7386.700	V	45.12	31.34	8.51	53.63	39.85	74.00	54.00	- 14.15	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency◦“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11b/CH11(Above 1000 MHz, Vertical)

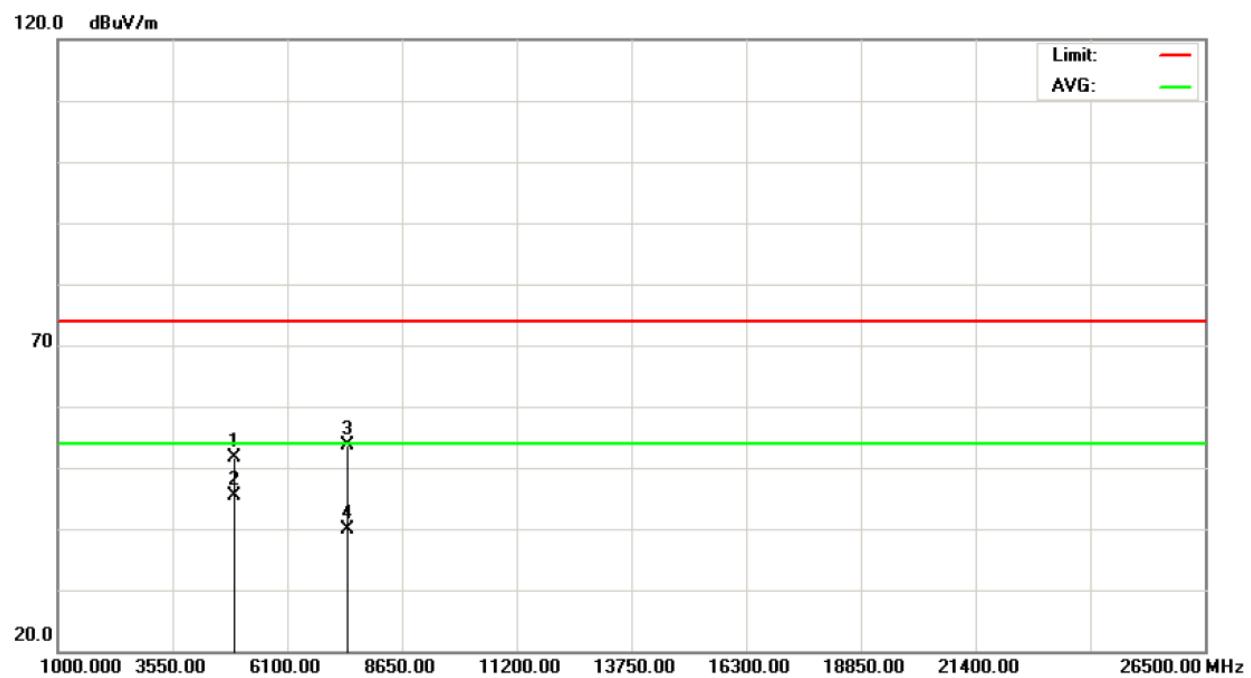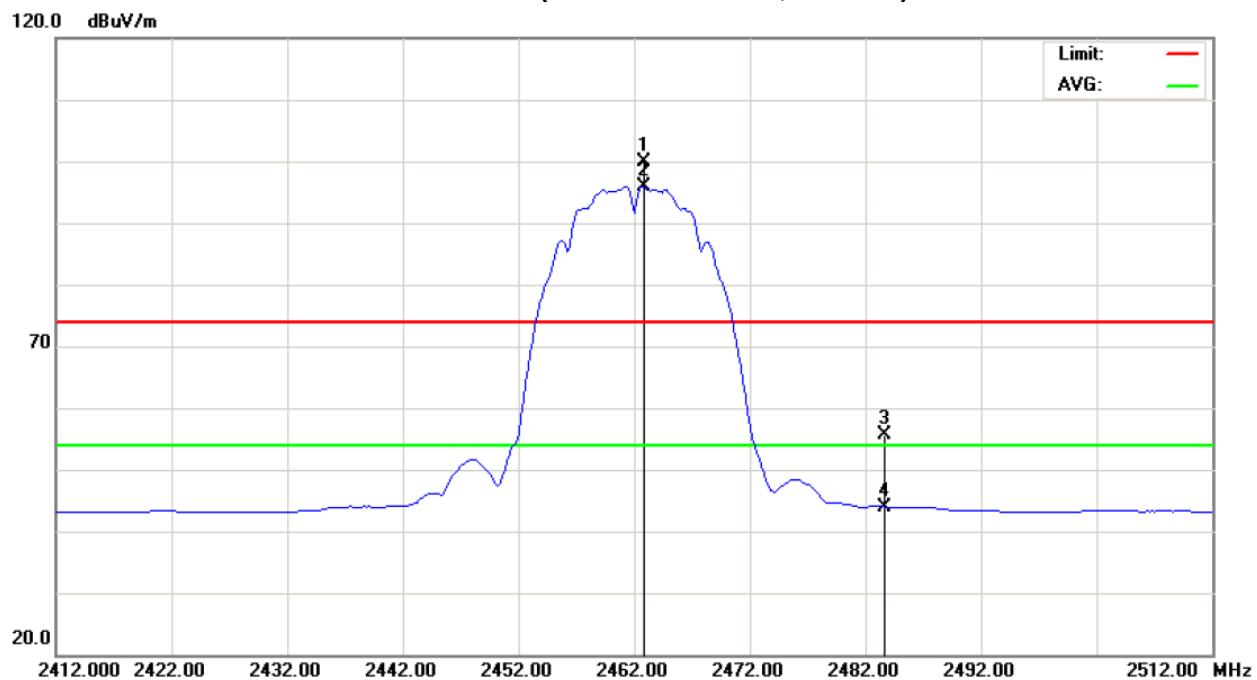





EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz	Orthogonal Axes:	X
Test Mode :	802.11b/CH11		

Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2462.000	H	76.62	72.82	19.00	95.62	91.82				
E	2483.500	H	27.58	17.00	31.28	58.86	48.28	74.00	54.00	- 5.72	AV
H	4923.970	H	47.56	40.17	3.03	50.59	43.20	74.00	54.00	- 10.80	AV
H	7386.890	H	45.23	31.23	8.51	53.74	39.74	74.00	54.00	- 14.26	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

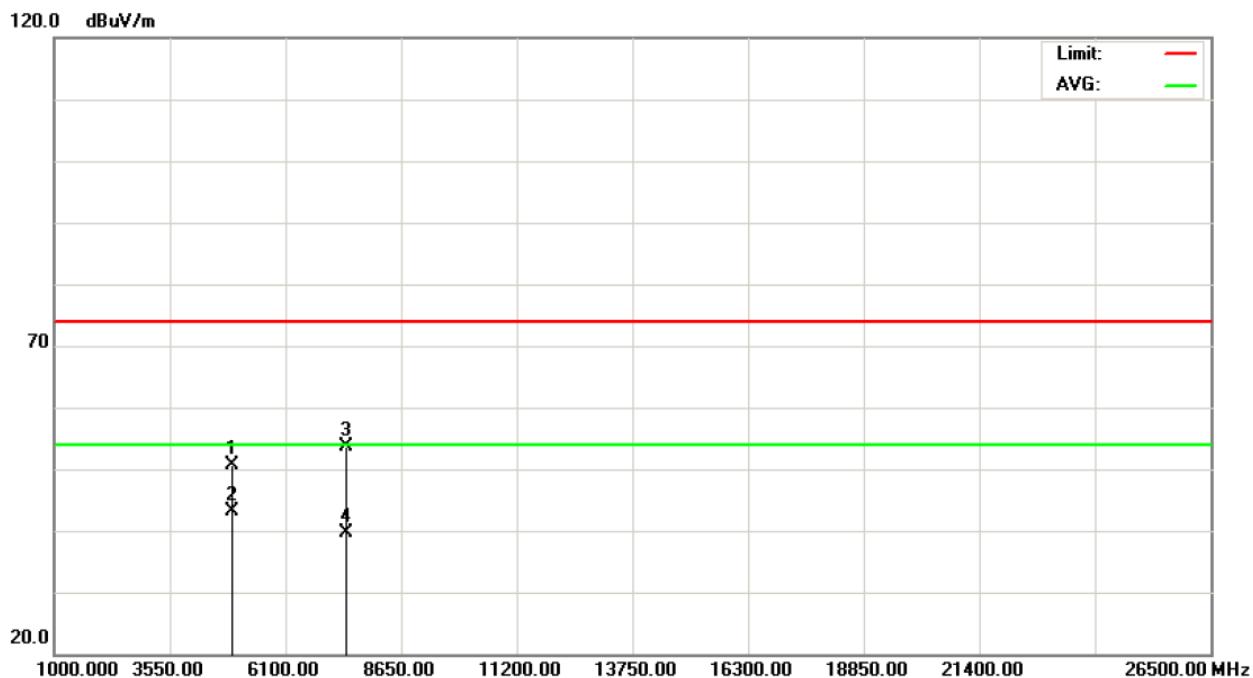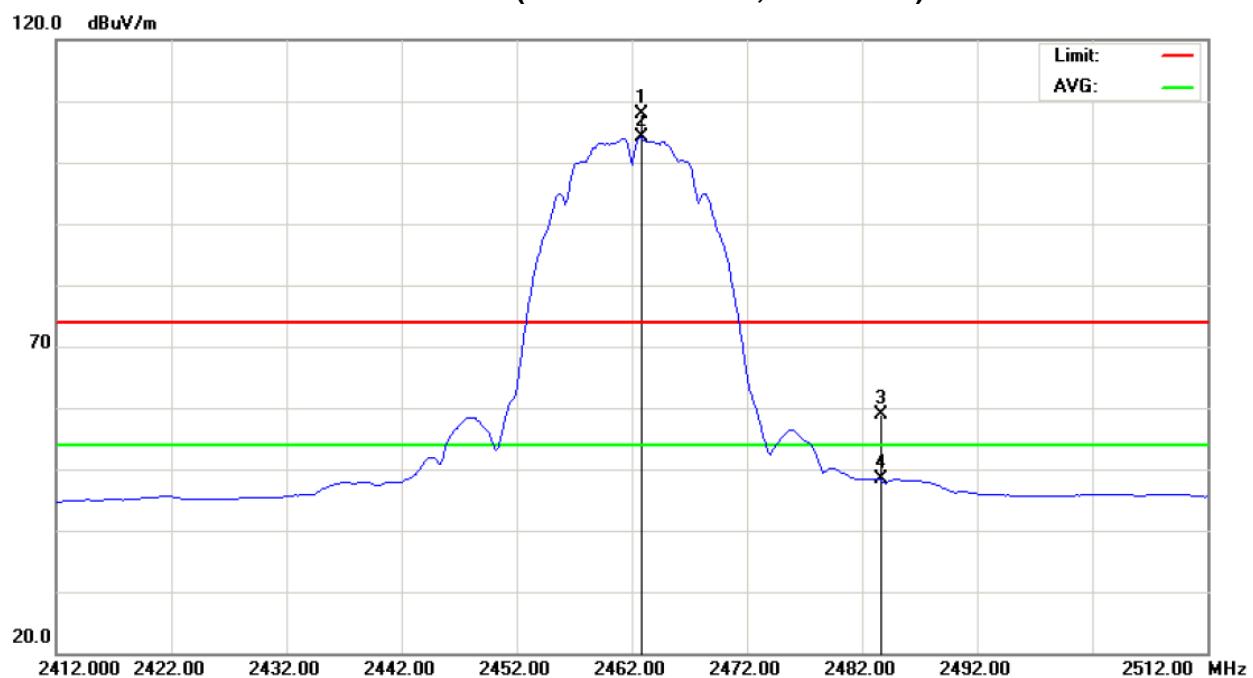**Orthogonal Axis : X****802.11b/CH11(Above 1000 MHz, Horizontal)**



EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz	Orthogonal Axes:	X
Test Mode :	802.11g/CH01		

Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
E	2390.000	V	23.88	11.76	30.89	54.77	42.65	74.00	54.00	- 11.35	AV
F	2418.400	V	64.00	55.06	31.01	95.01	86.07				
H	4824.020	V	45.59	30.84	2.70	48.29	33.54	74.00	54.00	- 20.46	AV
H	7235.980	V	45.15	30.48	8.31	53.46	38.79	74.00	54.00	- 15.21	AV



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency◦“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11g/CH01(Above 1000 MHz, Vertical)

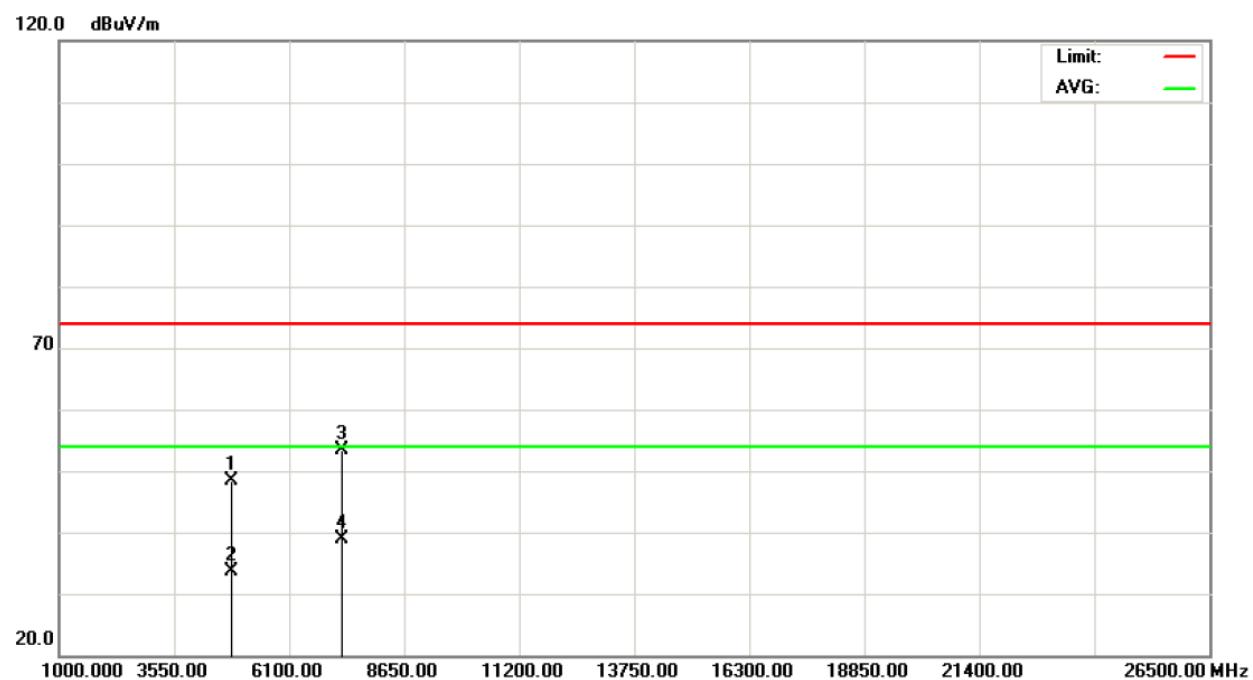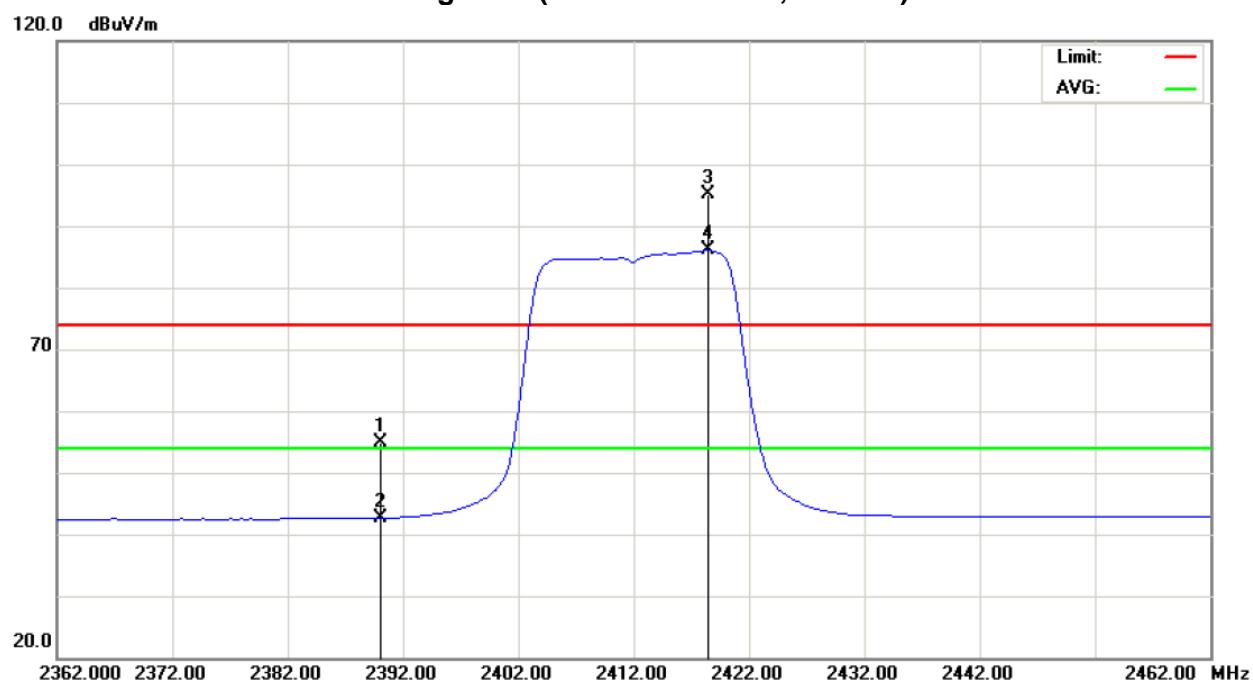



EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz	Orthogonal Axes:	X
Test Mode :	802.11g/CH01		

Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
E	2390.000	H	24.07	12.63	30.89	54.96	43.52	74.00	54.00	- 10.48	AV
F	2418.400	H	69.30	60.22	31.01	100.31	91.23				
H	4824.050	H	44.86	30.61	2.70	47.56	33.31	74.00	54.00	- 20.69	AV
H	7235.980	H	45.35	30.43	8.31	53.66	38.74	74.00	54.00	- 15.26	AV



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11g/CH01(Above 1000 MHz, Horizontal)

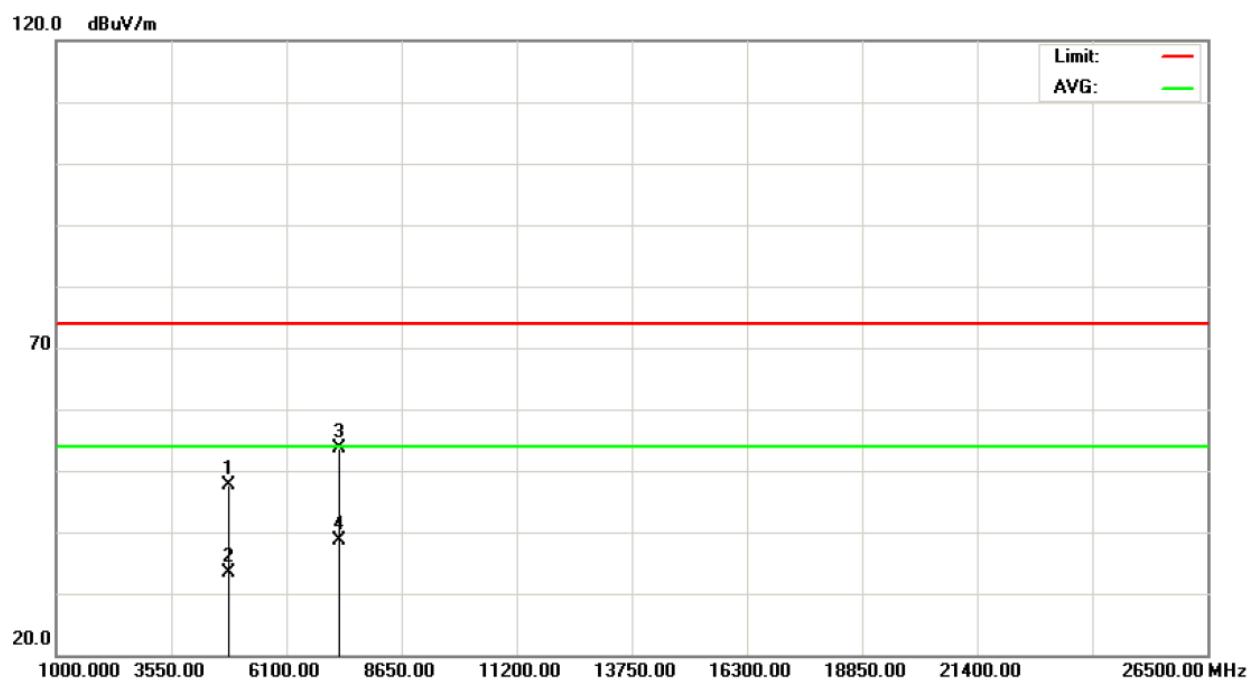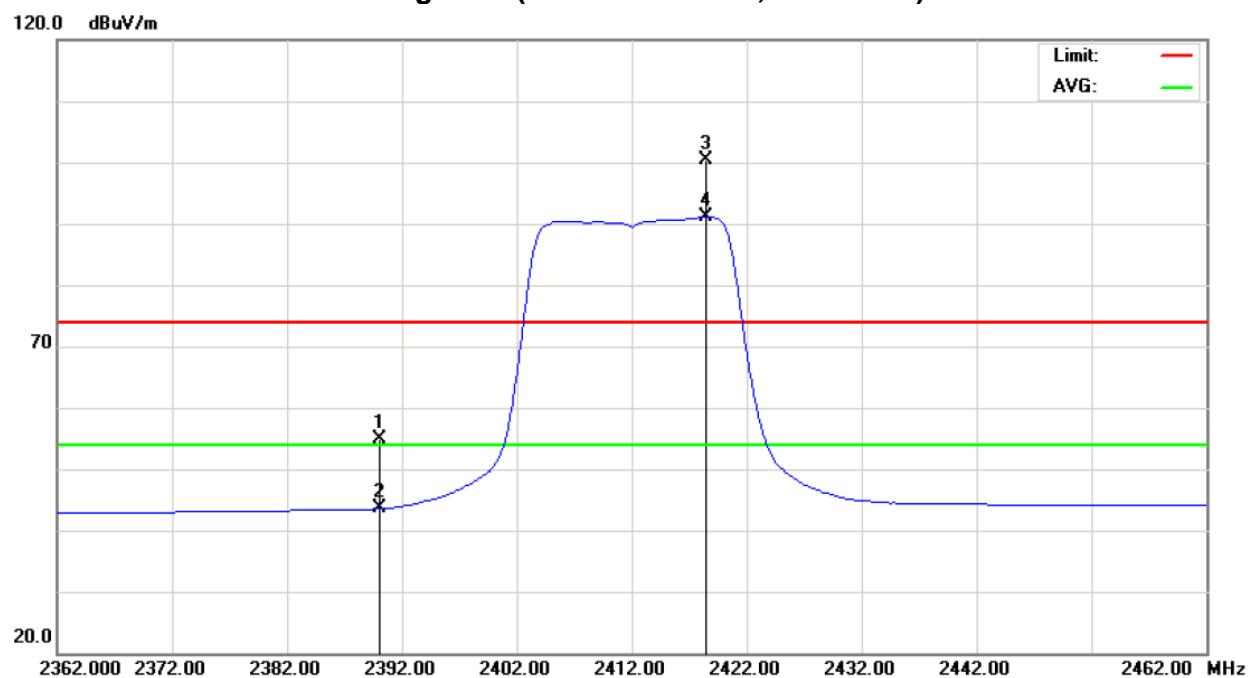



EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz	Orthogonal Axes:	X
Test Mode :	802.11g/CH06		

Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2430.200	V	63.21	53.54	31.06	94.27	84.60				
H	4873.970	V	44.95	30.45	2.87	47.82	33.32	74.00	54.00	- 20.68	AV
H	7309.740	V	45.21	30.73	8.41	53.62	39.14	74.00	54.00	- 14.86	AV



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11g/CH06(Above 1000 MHz, Vertical)

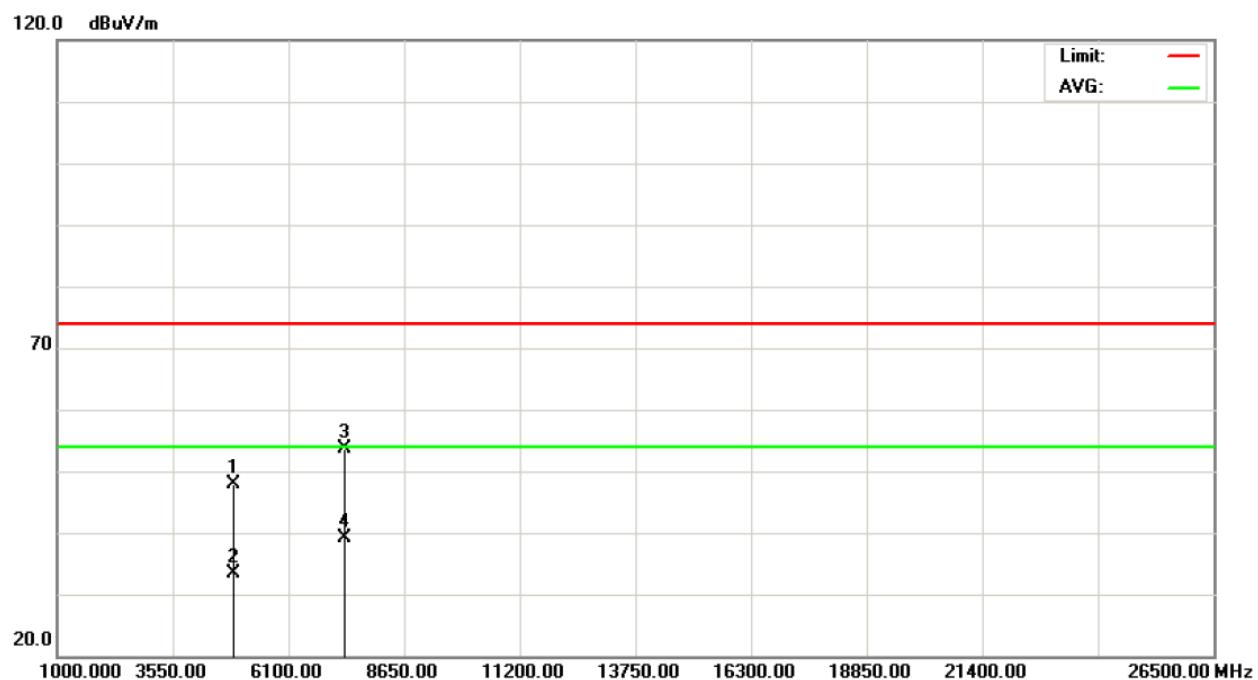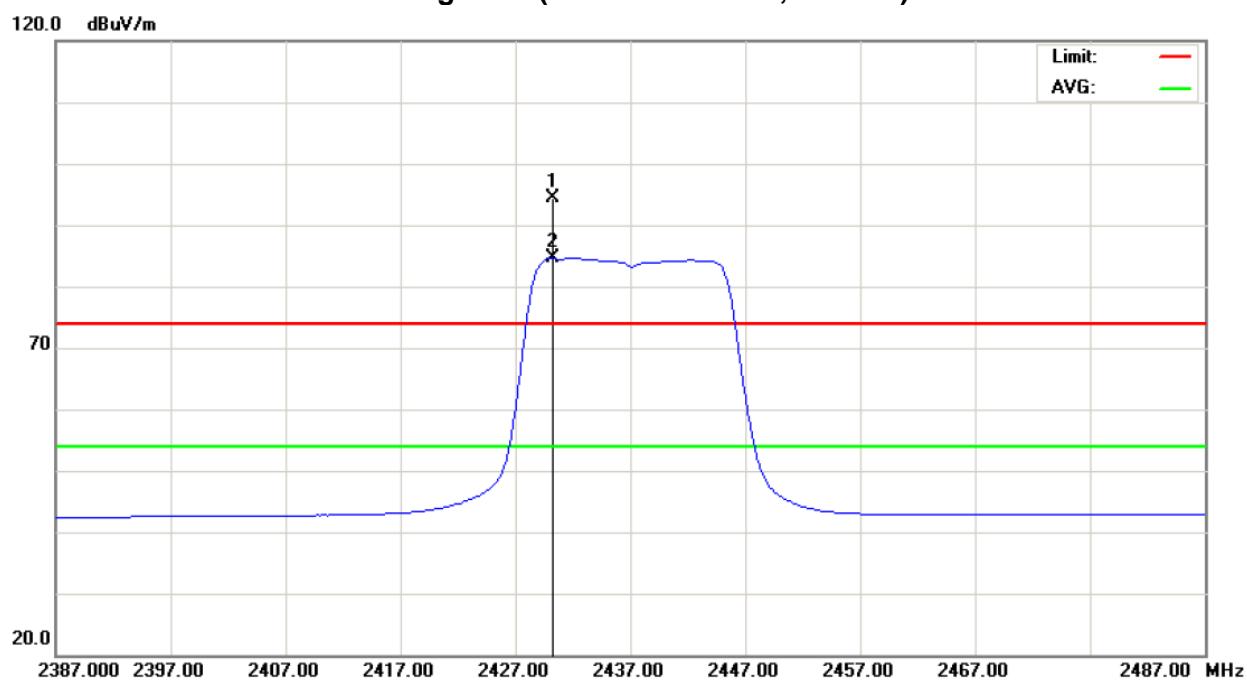



EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz	Orthogonal Axes:	X
Test Mode :	802.11g/CH06		

Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2442.200	H	70.34	7.00	31.11	101.45	38.11				
H	4874.020	H	44.77	30.23	2.87	47.64	33.10	74.00	54.00	- 20.90	AV
H	7310.170	H	44.30	30.72	8.41	52.71	39.13	74.00	54.00	- 14.87	AV



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11g/CH06(Above 1000 MHz, Horizontal)

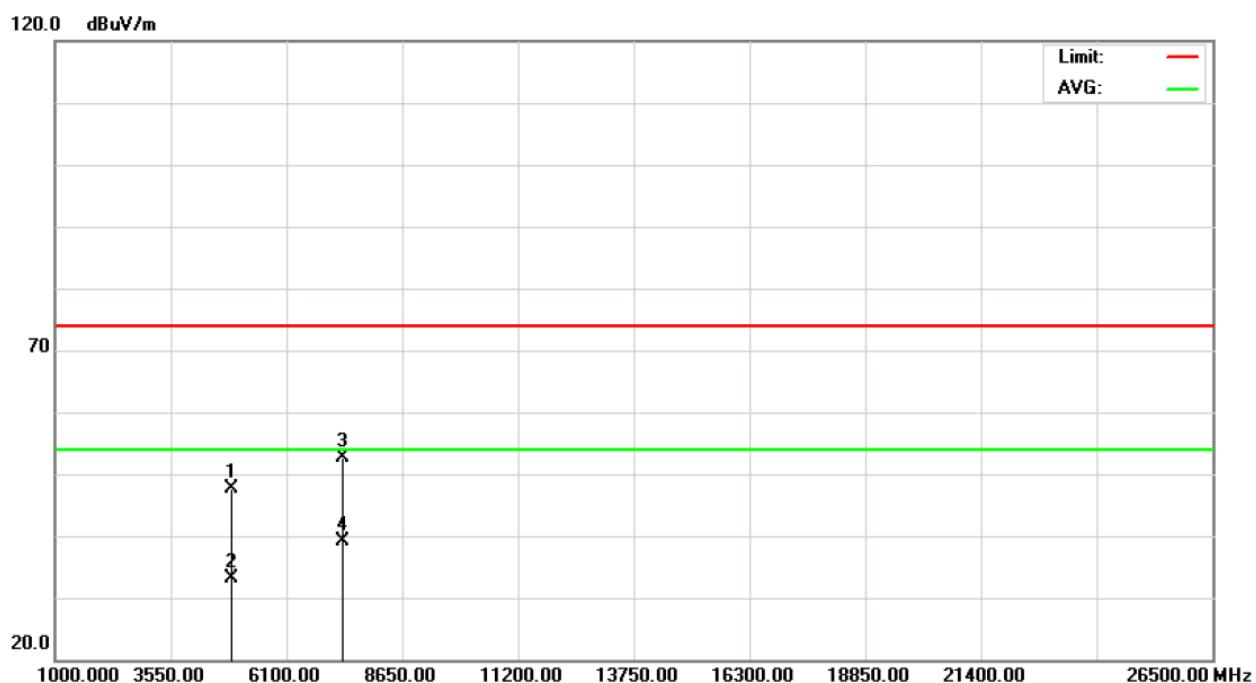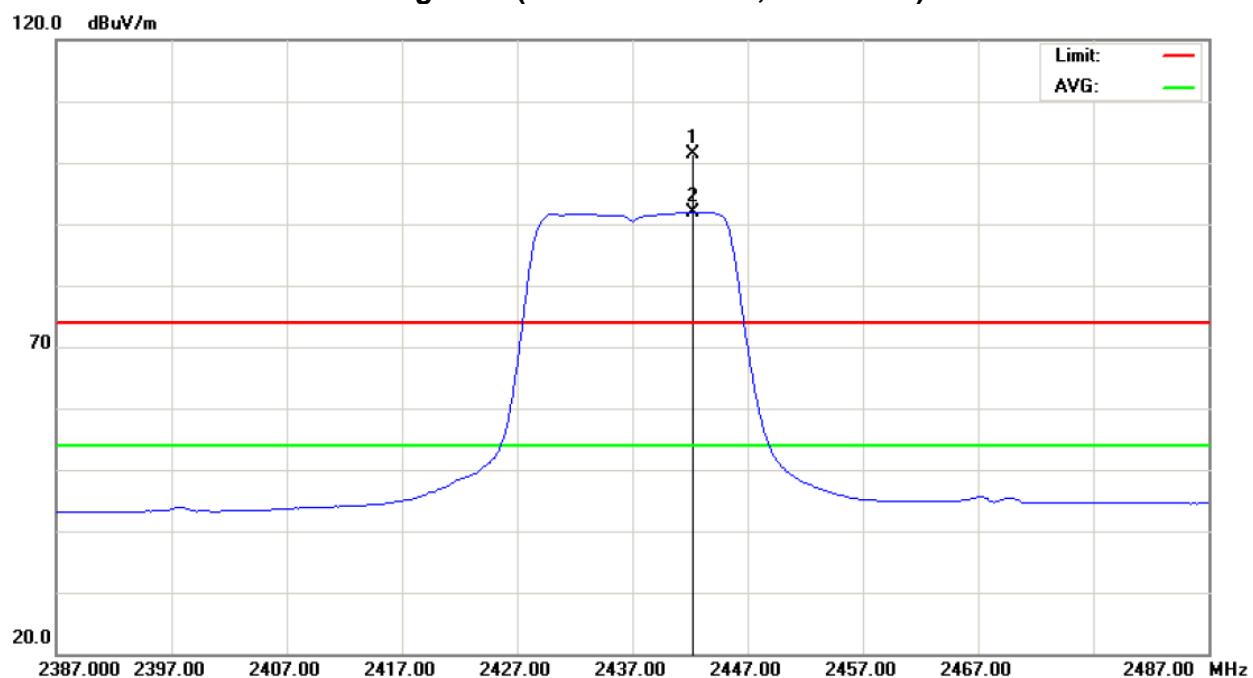



EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz	Orthogonal Axes:	X
Test Mode :	802.11g/CH11		

Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2456.800	V	63.64	54.21	31.16	94.80	85.37				
E	2483.500	V	23.73	11.96	31.28	55.01	43.24	74.00	54.00	- 10.76	AV
H	4923.020	V	43.77	30.30	3.03	46.80	33.33	74.00	54.00	- 20.67	AV
H	7386.910	V	45.68	31.06	8.51	54.19	39.57	74.00	54.00	- 14.43	AV



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency◦“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11g/CH11(Above 1000 MHz, Vertical)

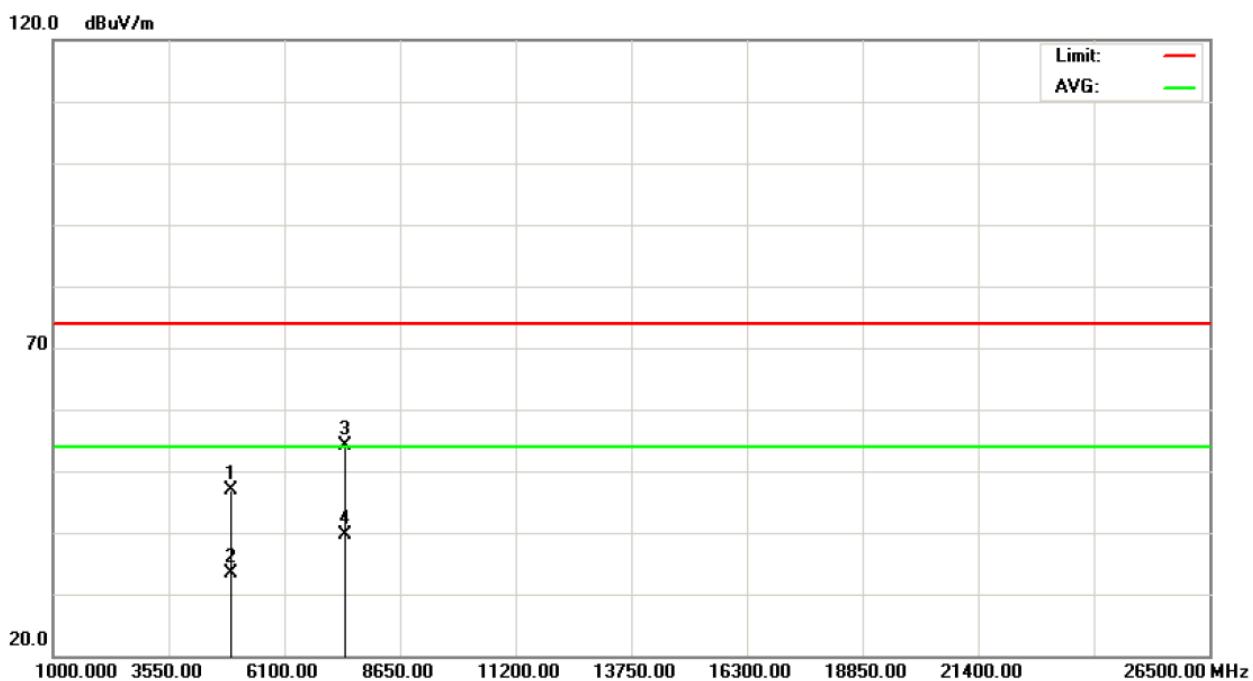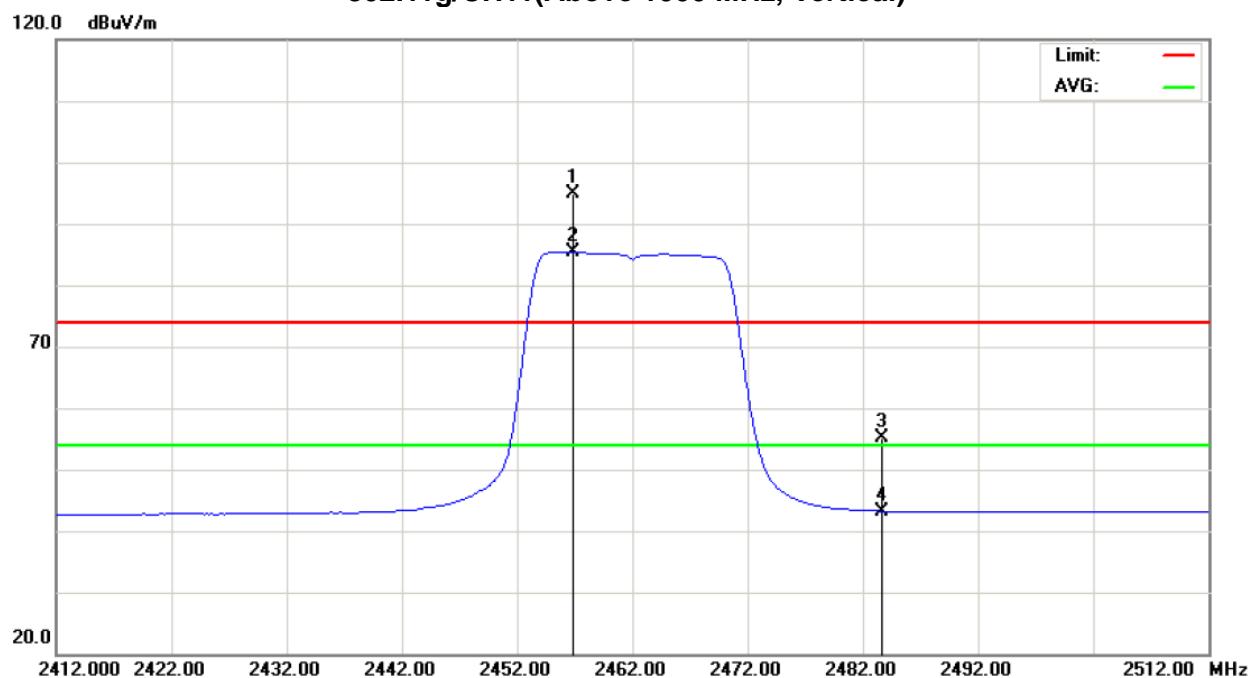



EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz	Orthogonal Axes:	X
Test Mode :	802.11g/CH11		

Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2467.400	H	70.66	61.21	31.21	101.87	92.42				
E	2483.500	H	25.44	13.86	31.28	56.72	45.14	74.00	54.00	- 8.86	AV
H	4923.900	H	44.39	30.20	3.03	47.42	33.23	74.00	54.00	- 20.77	AV
H	7386.910	H	44.78	31.02	8.51	53.29	39.53	74.00	54.00	- 14.47	AV



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

802.11g/CH11(Above 1000 MHz, Horizontal)

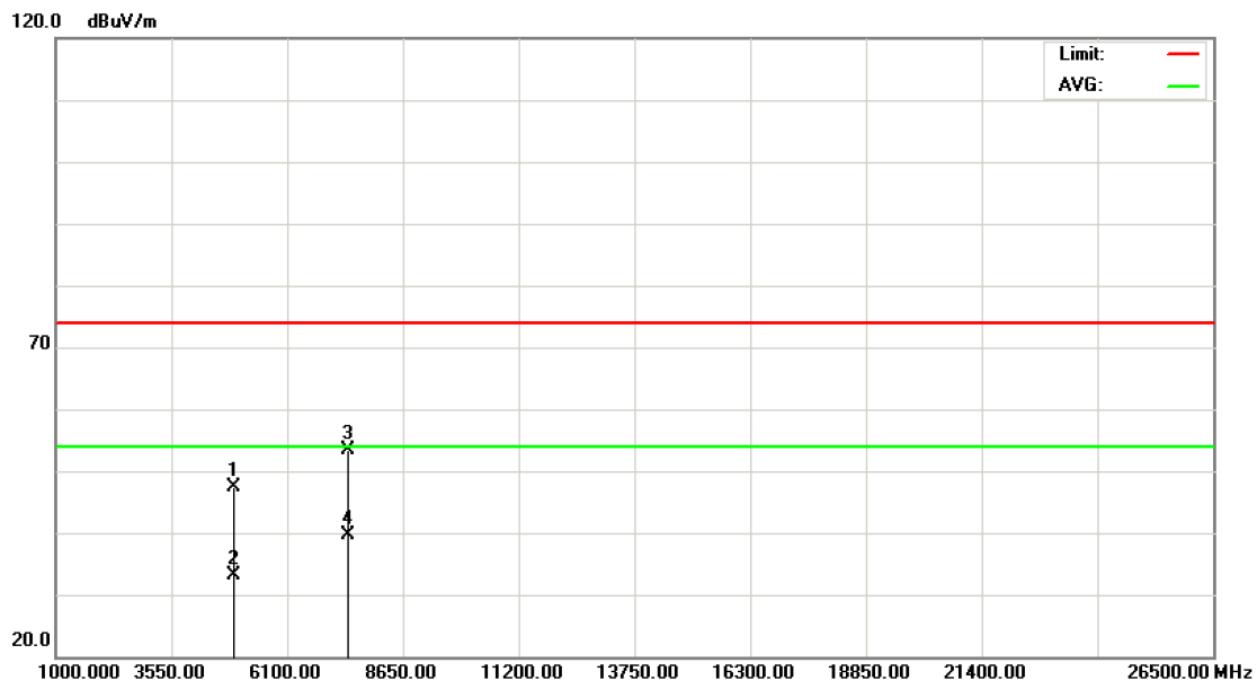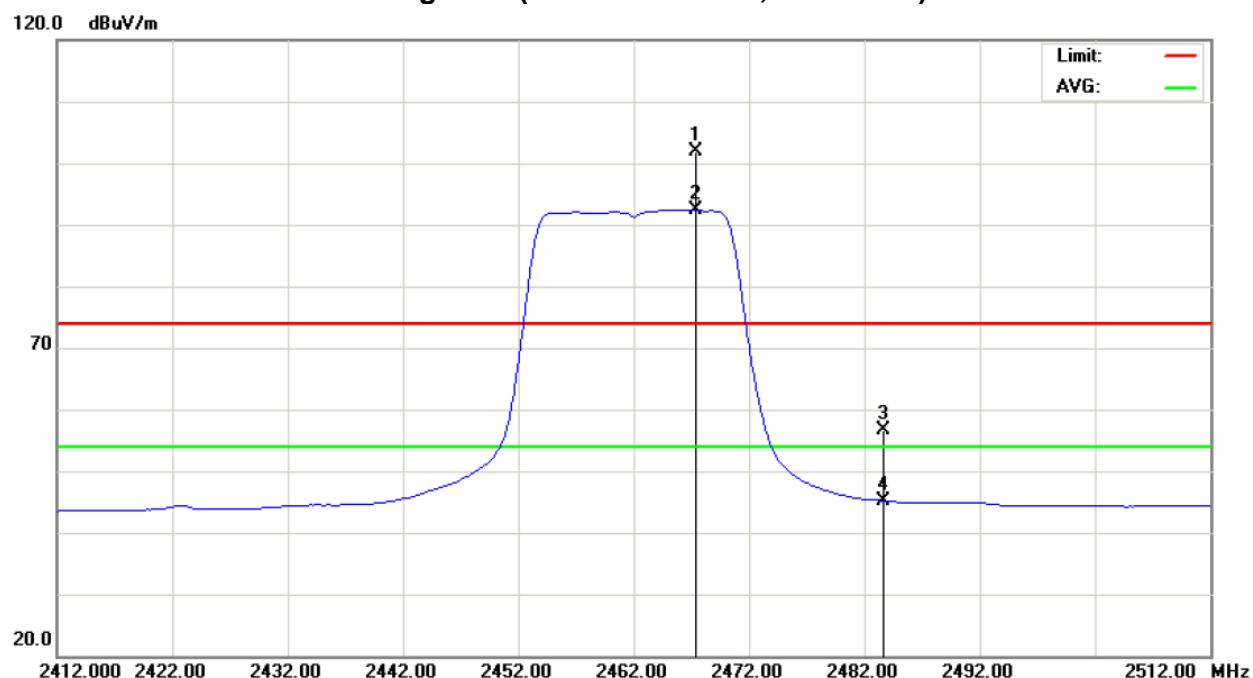

**4.2.9 TEST RESULTS-RESTRICTED BANDS REQUIREMENTS**

EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz	Orthogonal Axes:	X
Test Mode :	802.11b (Vertical)		
Note :	The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following: 1. The transmitter was setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz.		



Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
		Peak	AV		Peak	AV	Peak	AV		
2390.000	V	23.62	11.90	30.89	54.51	42.79	74.00	54.00	- 11.21	AV
2483.500	V	24.41	12.68	31.28	55.69	43.96	74.00	54.00	- 10.04	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (3) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand



802.11b (Restricted Bands Requirements, Vertical)

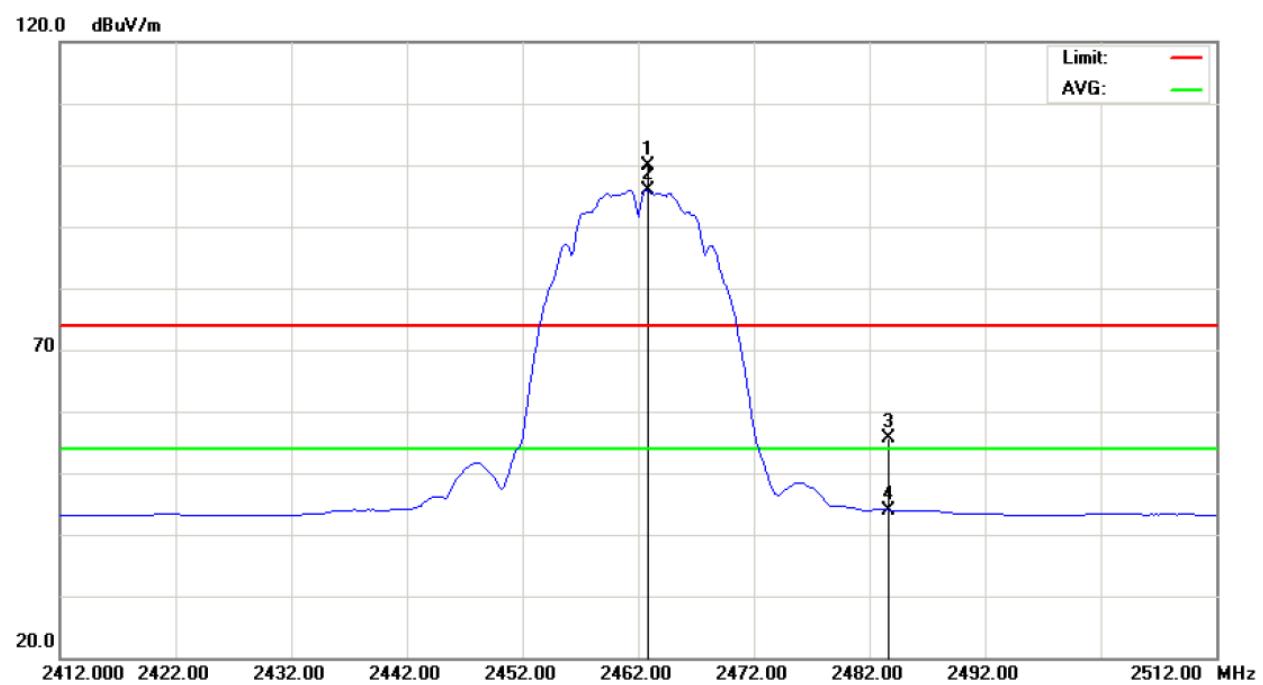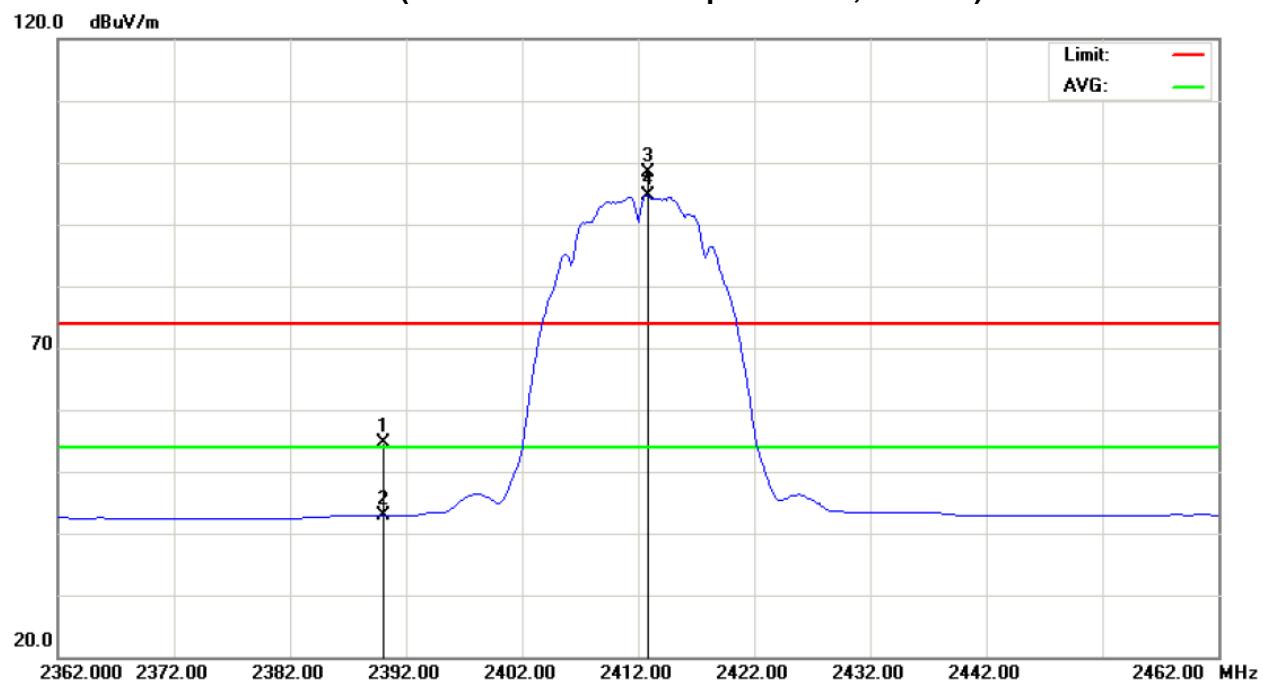



EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz	Orthogonal Axes:	X
Test Mode :	802.11b (Horizontal)		
Note :	<p>The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following:</p> <ol style="list-style-type: none">1. The transmitter was setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz.2. The transmitter was setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz.		



Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
		Peak	AV		Peak	AV	Peak	AV		
2390.000	H	24.15	13.14	30.89	55.04	44.03	74.00	54.00	- 9.97	AV
2483.500	H	27.58	17.00	31.28	58.86	48.28	74.00	54.00	- 5.72	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (3) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand



802.11b (Restricted Bands Requirements, Horizontal)

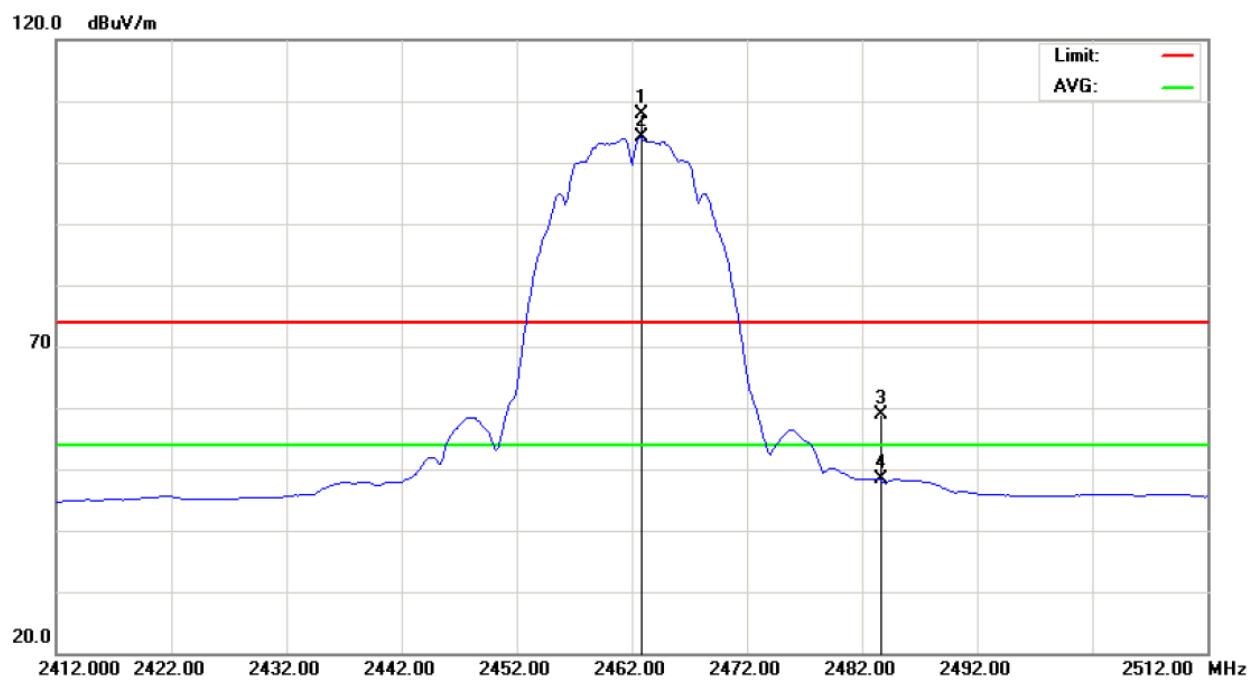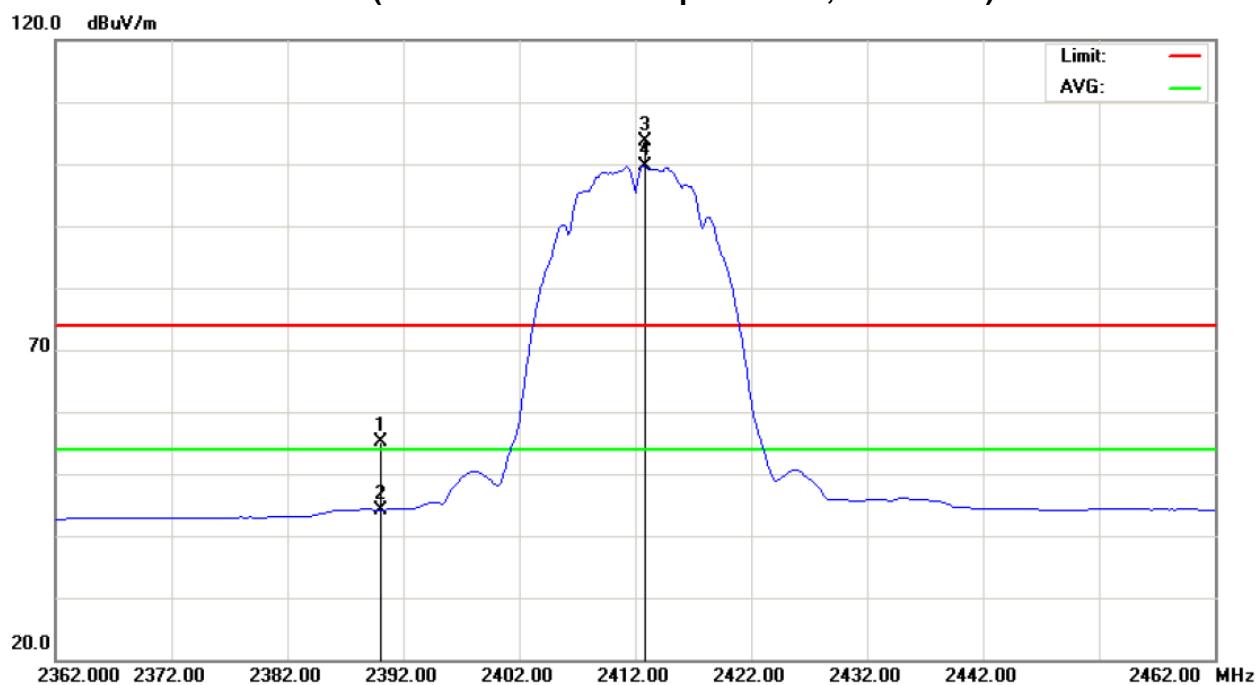



EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz	Orthogonal Axes:	X
Test Mode :	802.11g (Vertical)		
Note :	The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following: 1. The transmitter was setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz.		



Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
		Peak	AV		Peak	AV	Peak	AV		
2390.000	V	23.88	11.76	30.89	54.77	42.65	74.00	54.00	- 11.35	AV
2483.500	V	23.73	11.96	31.28	55.01	43.24	74.00	54.00	- 10.76	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (3) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand



802.11g (Restricted Bands Requirements, Vertical)

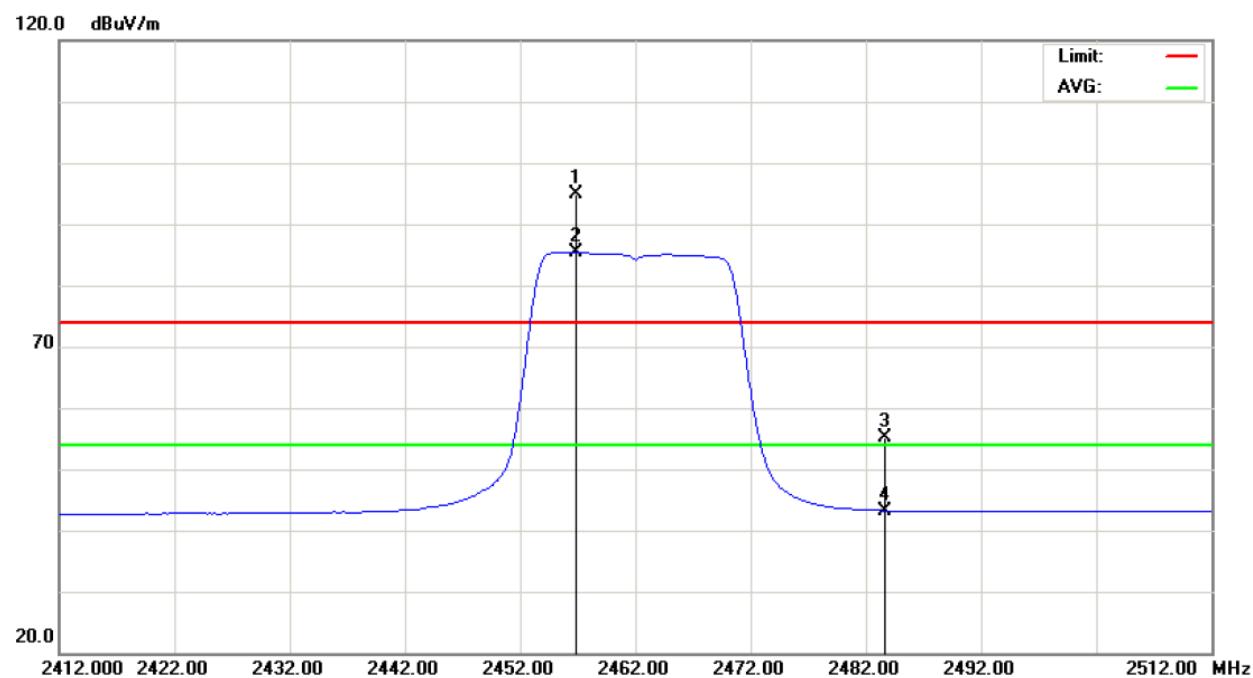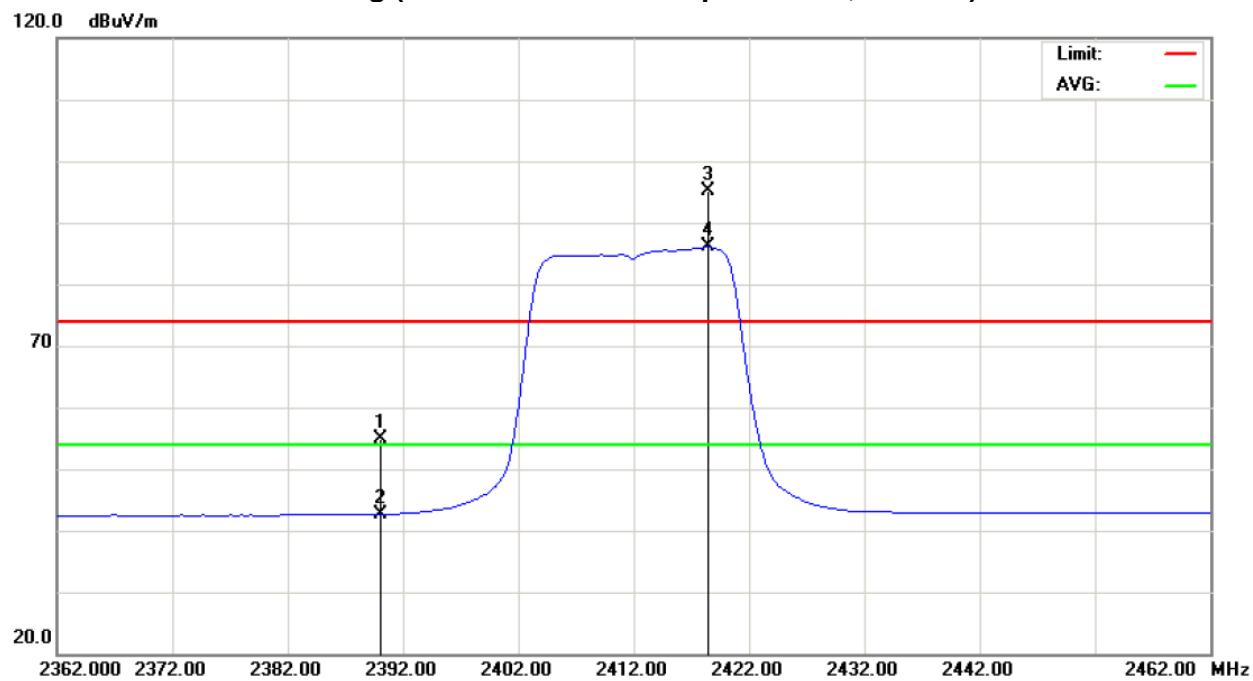



EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz	Orthogonal Axes:	X
Test Mode :	802.11g (Horizontal)		
Note :	<p>The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following:</p> <ol style="list-style-type: none">1. The transmitter was setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz.2. The transmitter was setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz.		



Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
		Peak	AV		Peak	AV	Peak	AV		
2390.000	H	24.07	12.63	30.89	54.96	43.52	74.00	54.00	- 10.48	AV
2483.500	H	25.44	13.86	31.28	56.72	45.14	74.00	54.00	- 8.86	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (3) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand



802.11g (Restricted Bands Requirements, Horizontal)

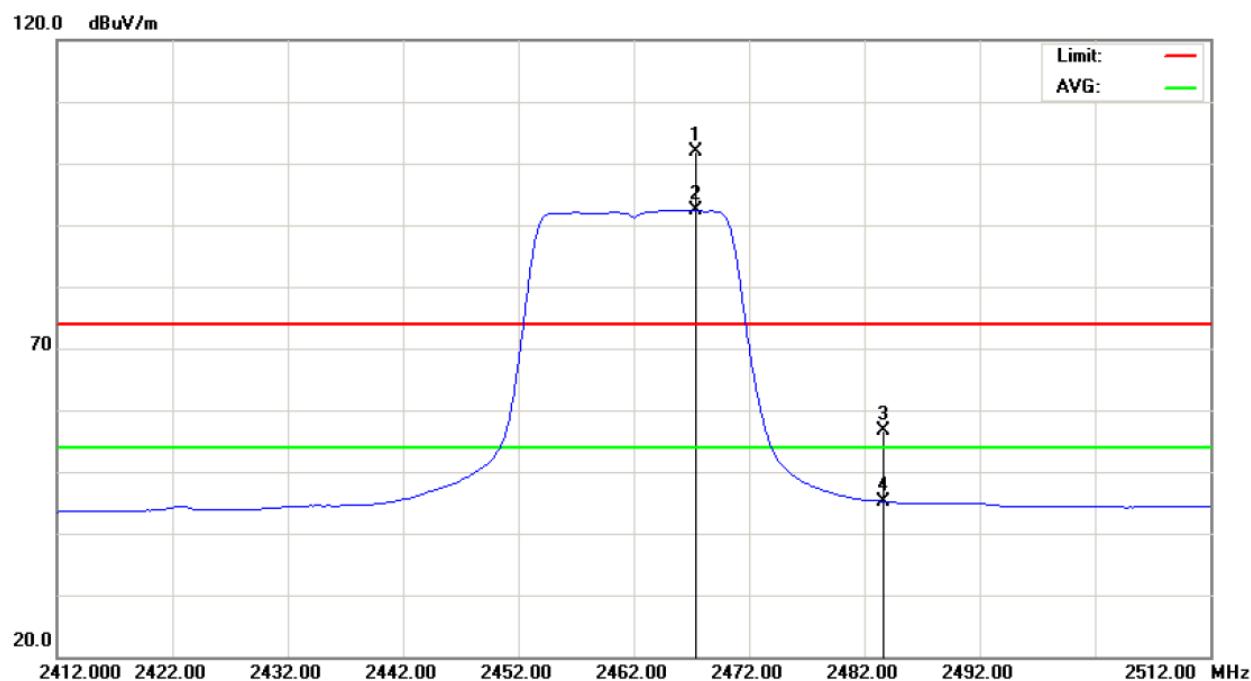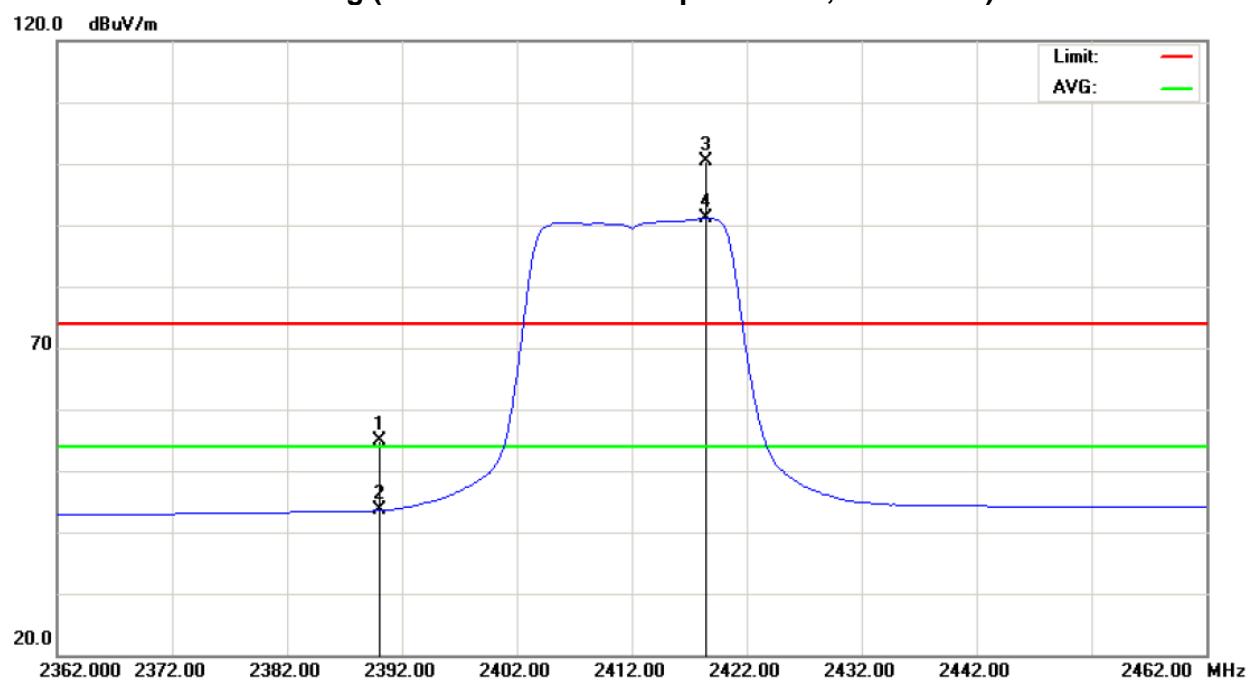



5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

5.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Aug. 31, 2011

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.


5.1.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

5.1.3 DEVIATION FROM STANDARD

No deviation.

5.1.4 TEST SETUP

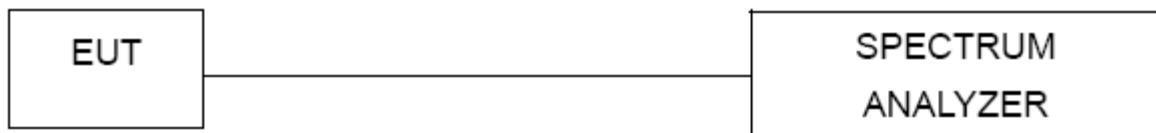

5.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.




5.1.6 TEST RESULTS

EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH01, CH06, CH11		


Test Channel	Frequency (MHz)	Bandwidth (MHz)	99% Occupied BW (MHz)	LIMIT (MHz)
CH01	2412	10.04	13.68	>=500KHz
CH06	2437	10.04	13.72	>=500KHz
CH11	2462	10.08	13.76	>=500KHz

CH01

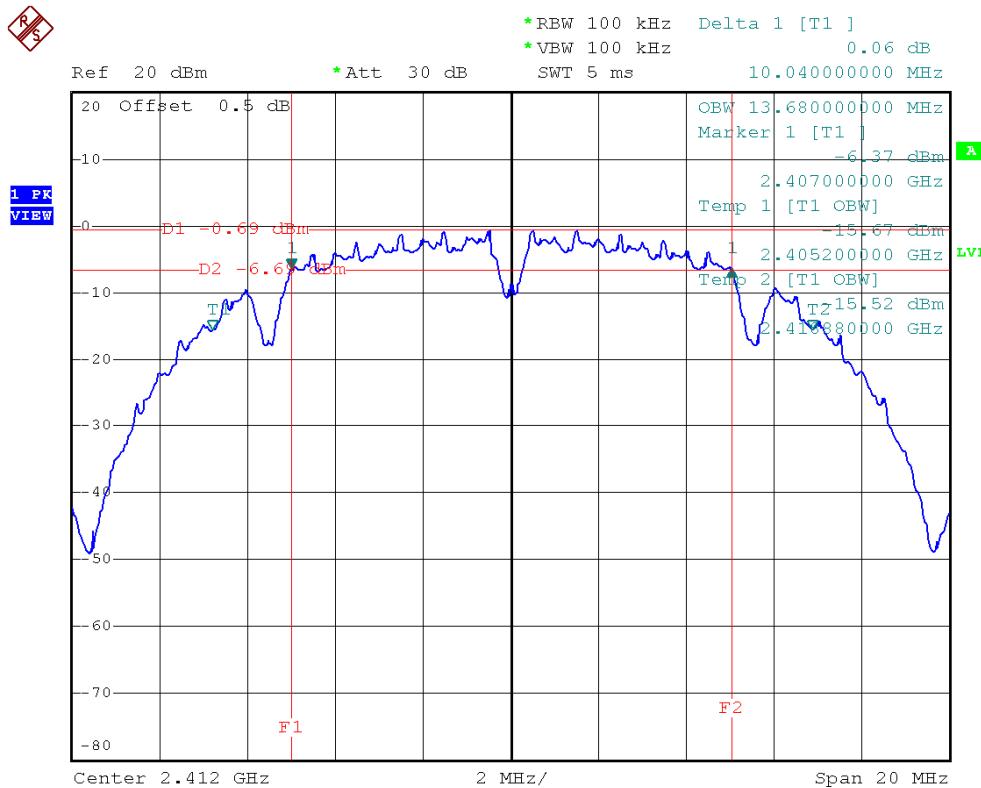




CH06

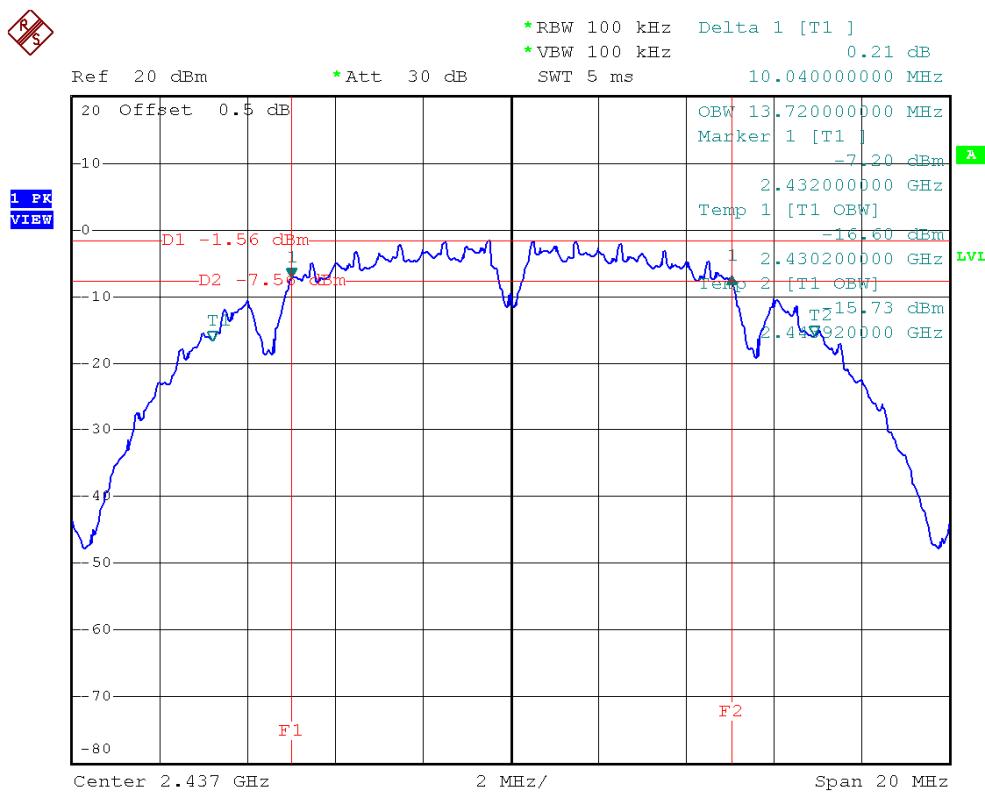


CH11

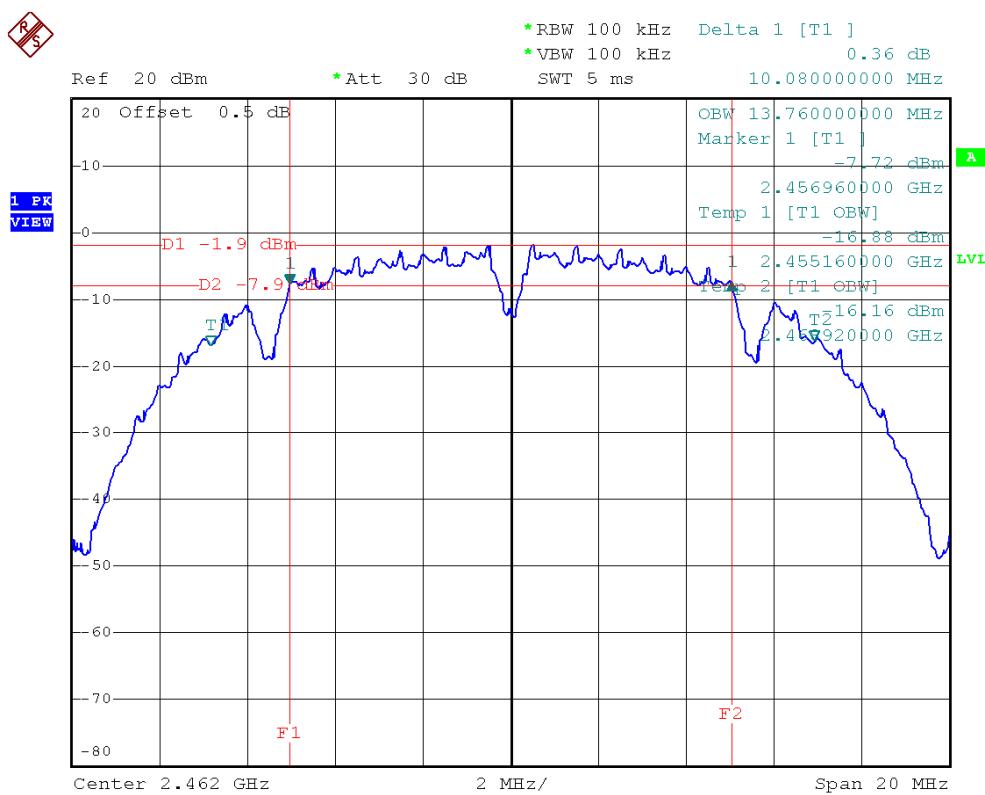




EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g/CH01, CH06, CH11		

Test Channel	Frequency (MHz)	Bandwidth (MHz)	99% Occupied BW (MHz)	LIMIT (MHz)
CH01	2412	16.60	16.52	>=500KHz
CH06	2437	16.56	16.48	>=500KHz
CH11	2462	16.64	16.52	>=500KHz

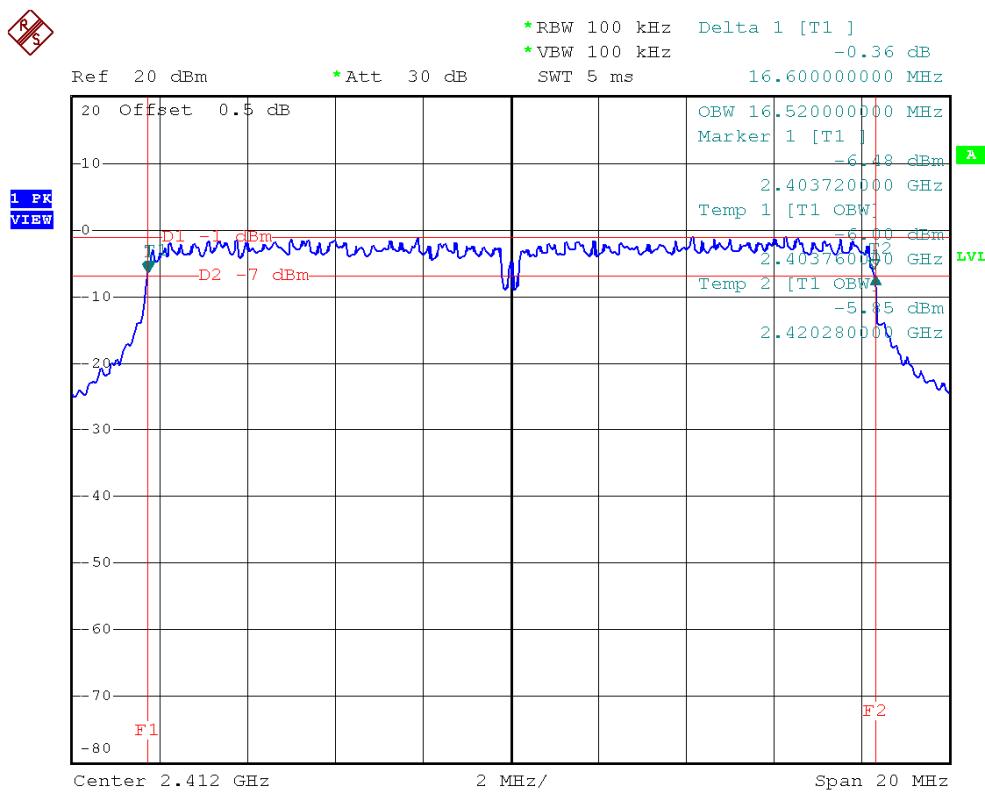
CH01



CH06

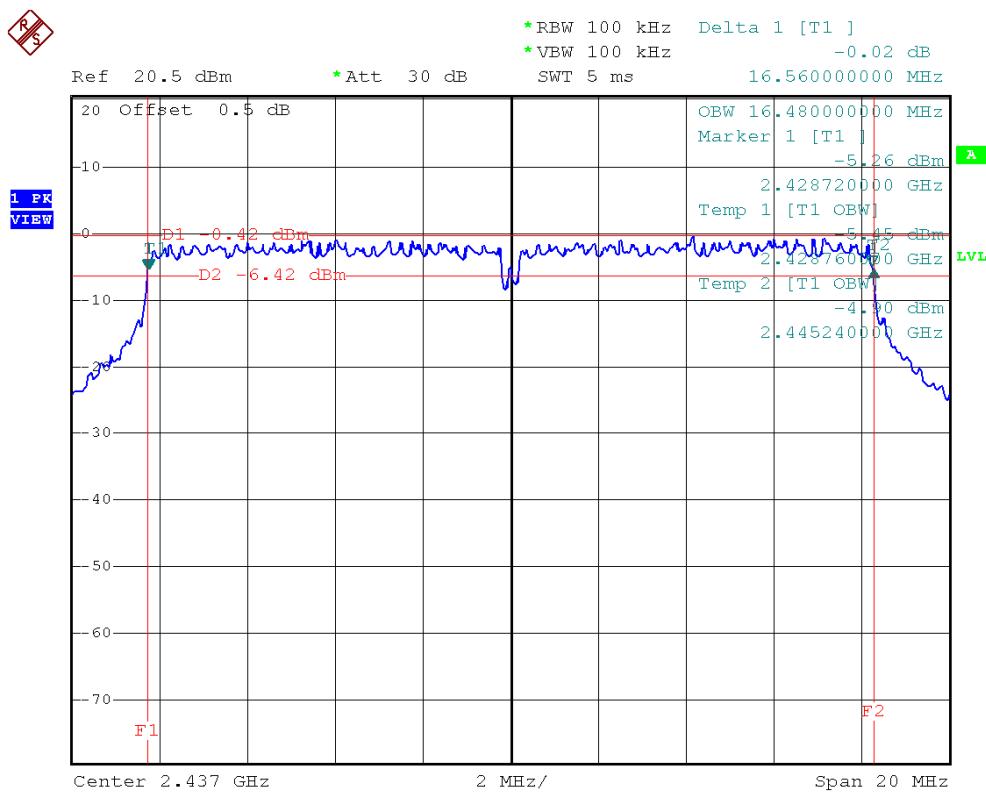

CH11

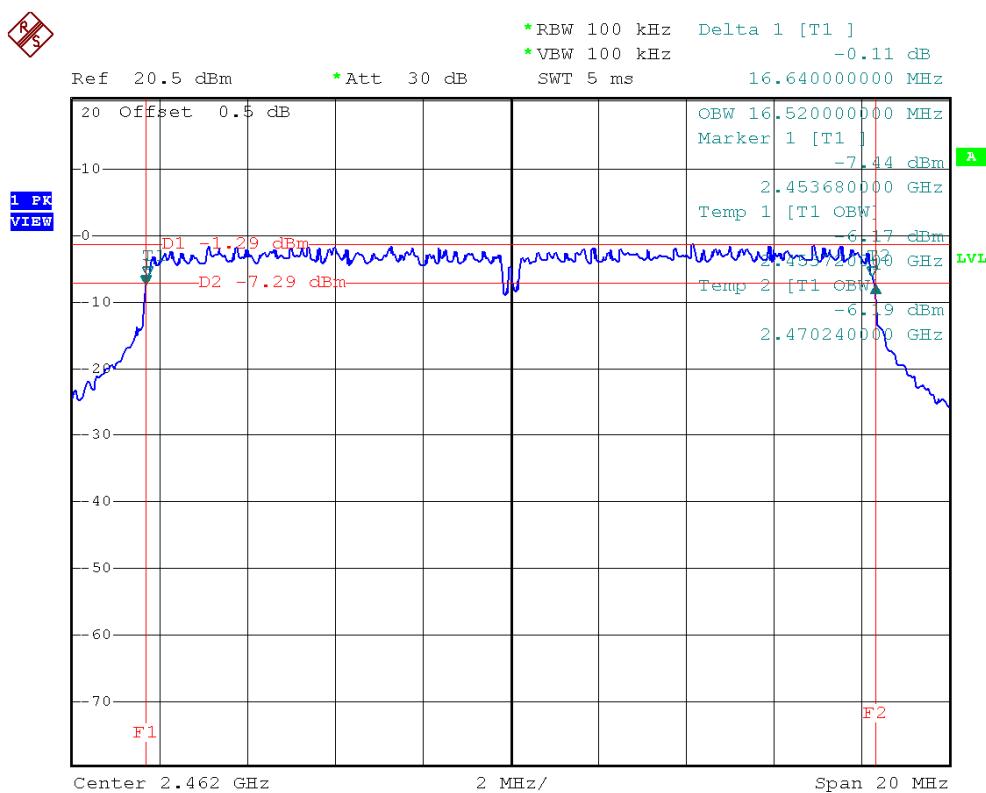



6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2487A	6K00004714	Feb. 17, 2012
2	Power Meter Sensor	Anritsu	MA2491A	34138	Feb. 17, 2012

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.


6.1.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 1MHz, VBW= 1MHz, Sweep time = Auto.

6.1.3 DEVIATION FROM STANDARD

No deviation.

6.1.4 TEST SETUP



6.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.1.6 TEST RESULTS**

EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH01, CH06, CH11		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH01	2412	13.28	30	1
CH06	2437	12.86	30	1
CH11	2462	12.66	30	1



EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g/CH01, CH06, CH11		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH01	2412	22.56	30	1
CH06	2437	23.32	30	1
CH11	2462	23.16	30	1



7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Antenna conducted Spurious Emission	20dB less than the peak value of fundamental frequency	30-25000	PASS

7.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Aug. 31, 2011

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.


7.1.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

7.1.3 DEVIATION FROM STANDARD

No deviation.

7.1.4 TEST SETUP

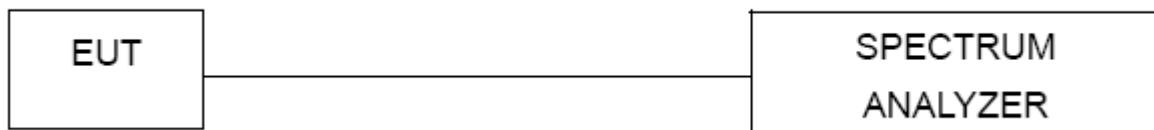

7.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.


**7.1.6 TEST RESULTS**

EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH01, CH11		

Channel of Worst Data: CH1,CH11			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2397.60	-43.30	2484.60	-48.36
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest lever of the desired power.			

**CH01**


REF

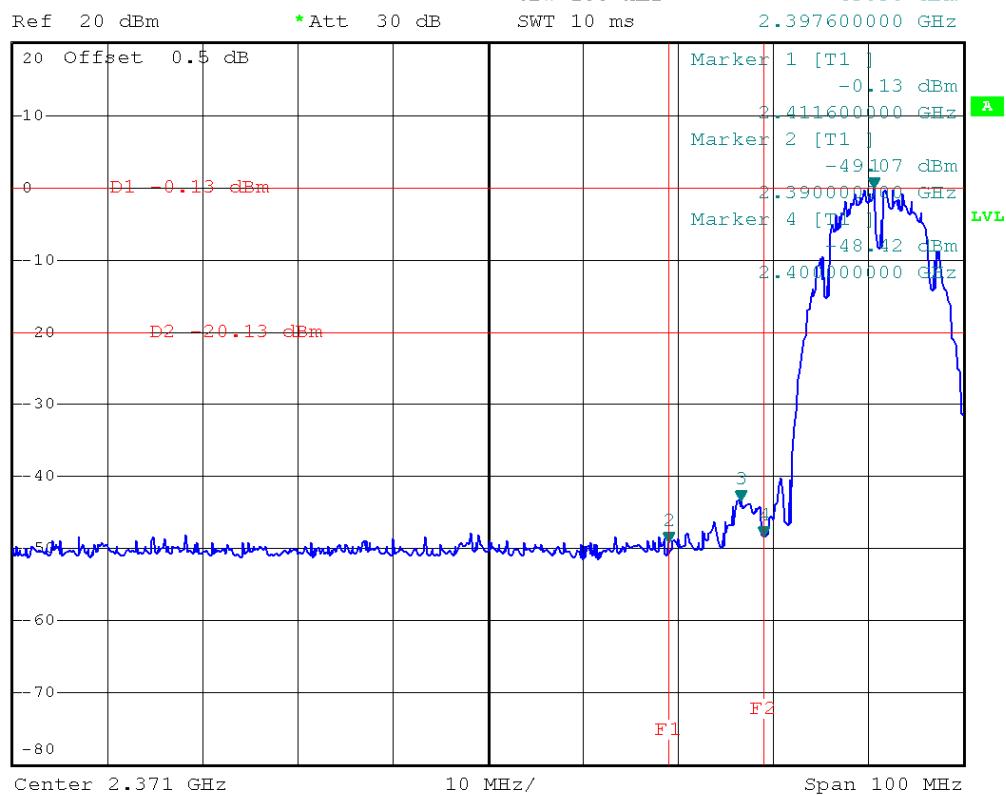

A

LVL

REF

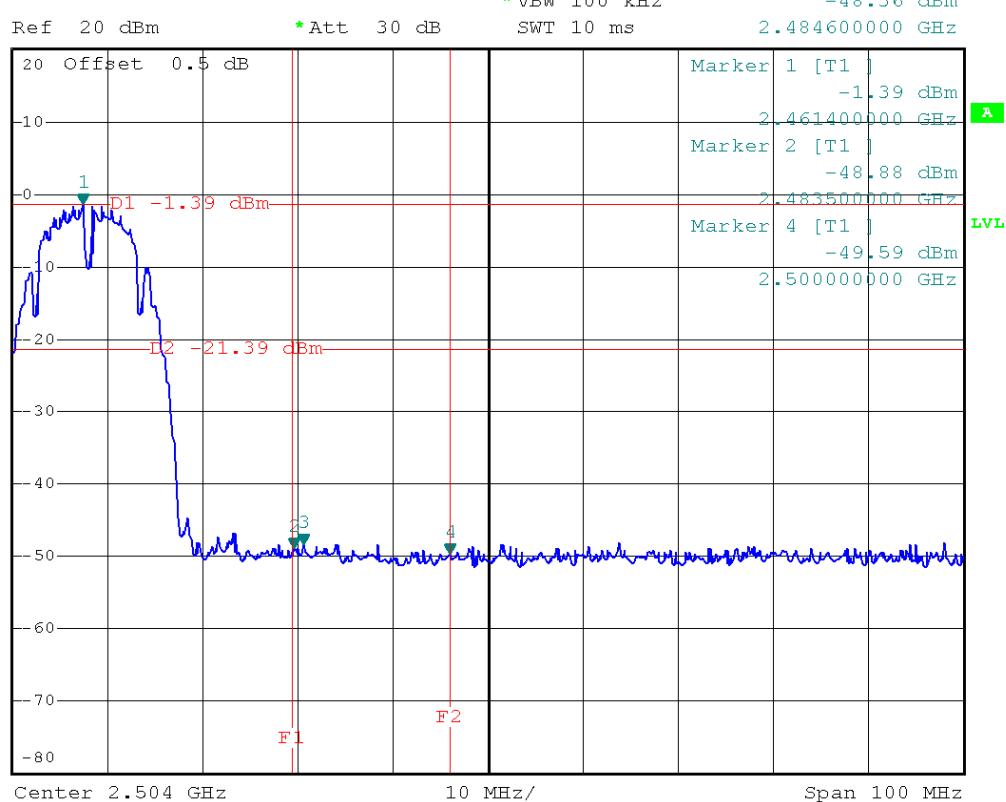


A


LVL

**CH01**

REFS

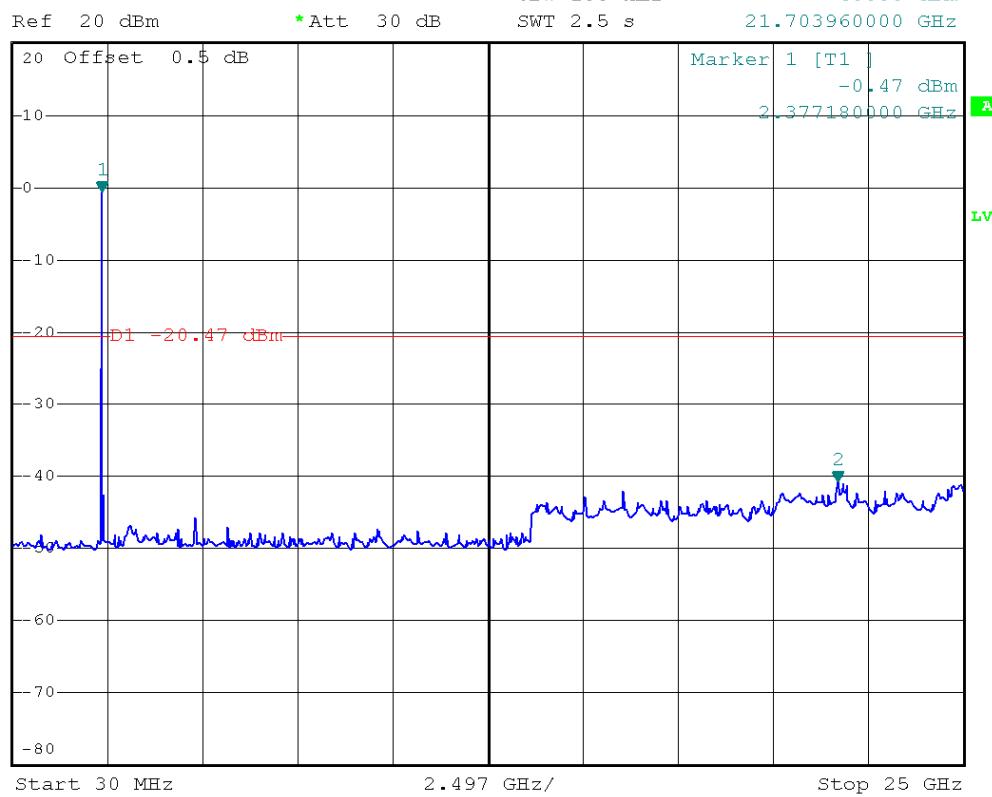**CH06**

REFS

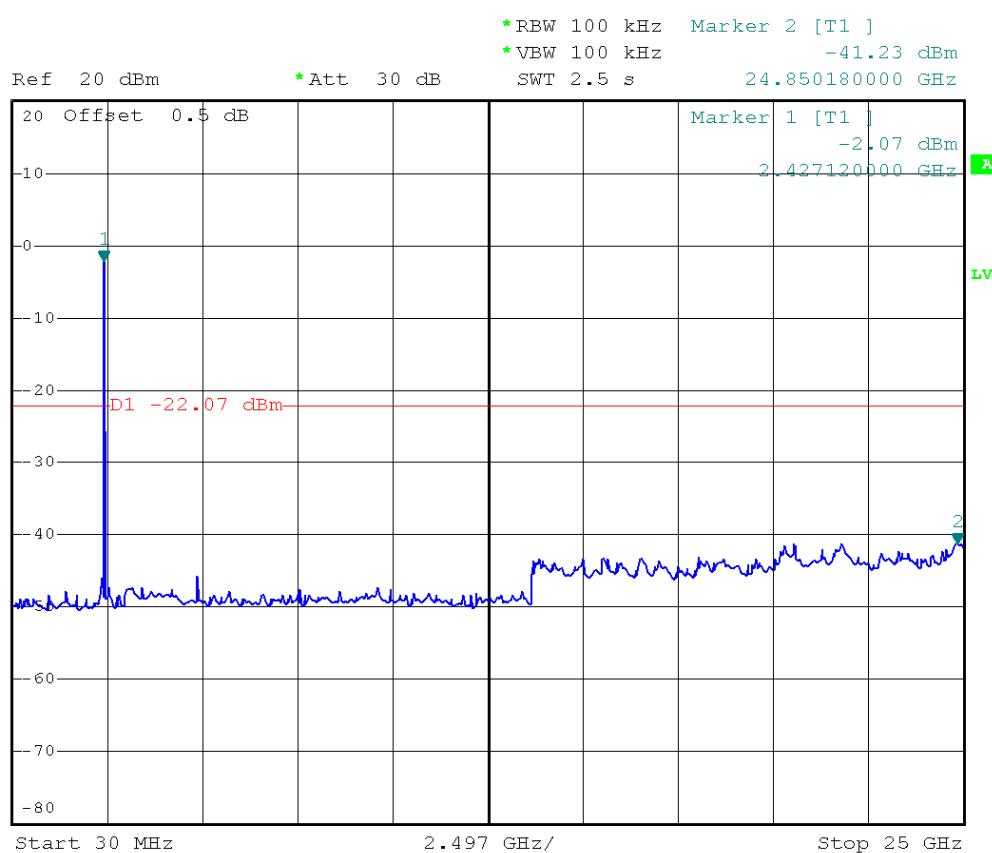



CH11


REF

Ref 20 dBm

* Att 30 dB

* RBW 100 kHz Marker 2 [T1]
* VBW 100 kHz -40.77 dBm
SWT 2.5 s 24.900120000 GHz

1 PK
VIEW

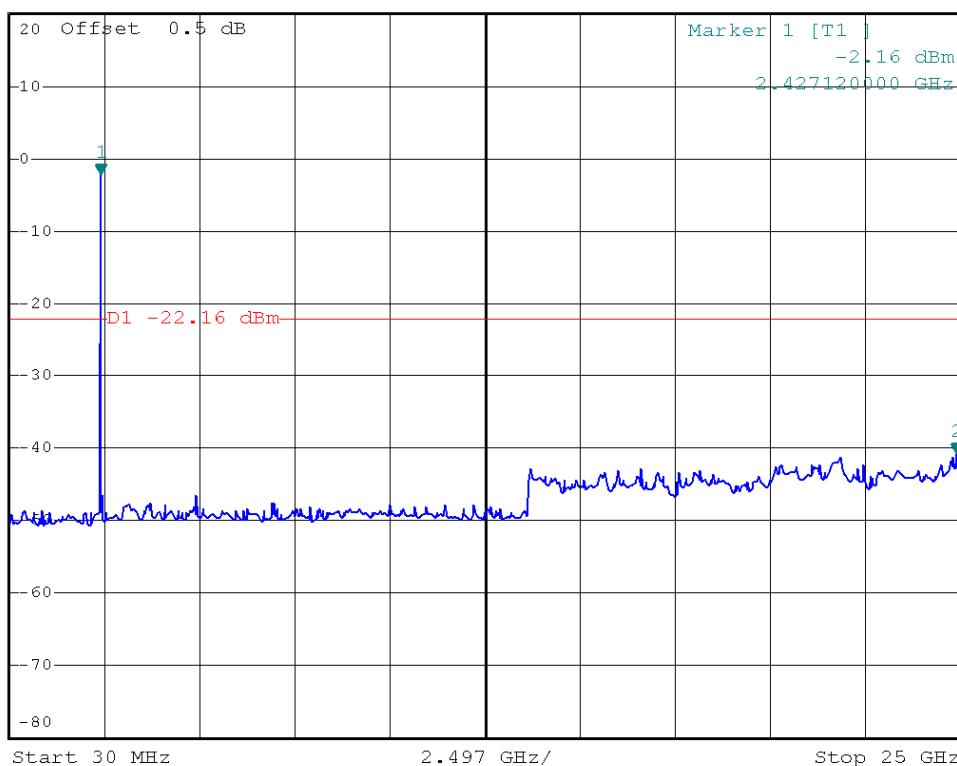



EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g/CH01, CH11		

Channel of Worst Data: CH1,CH11


The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2395.40	-31.12	2485.0	-39.23
Result			

In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest lever of the desired power.




CH01

REF S

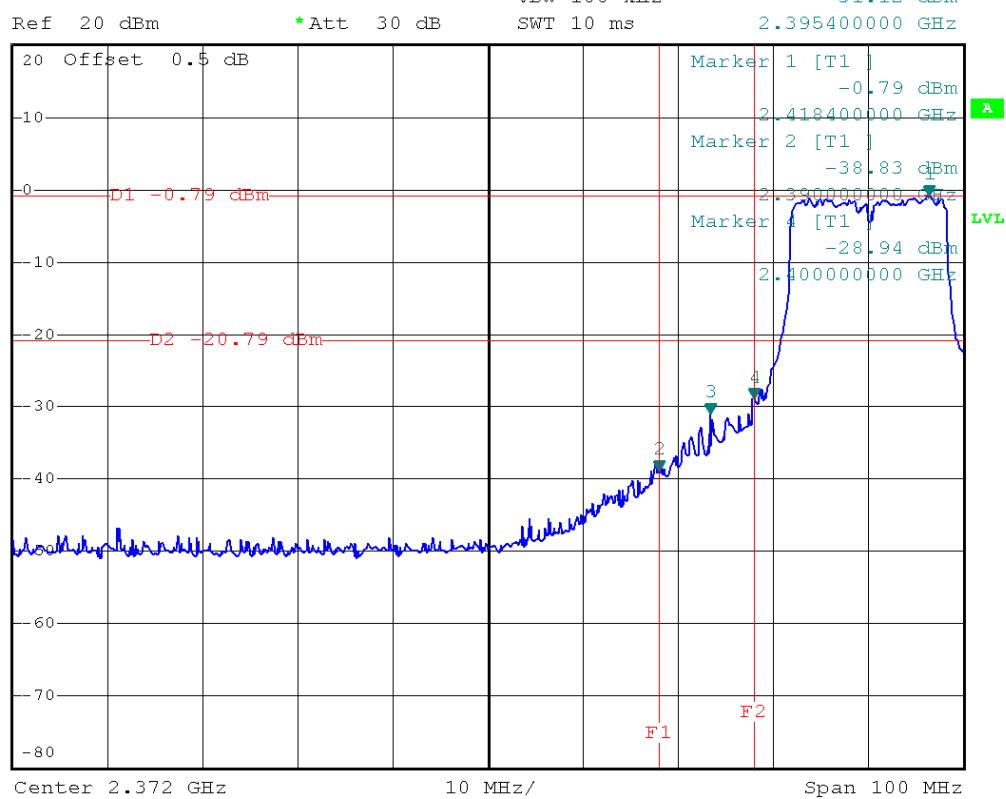

CH11

REF S

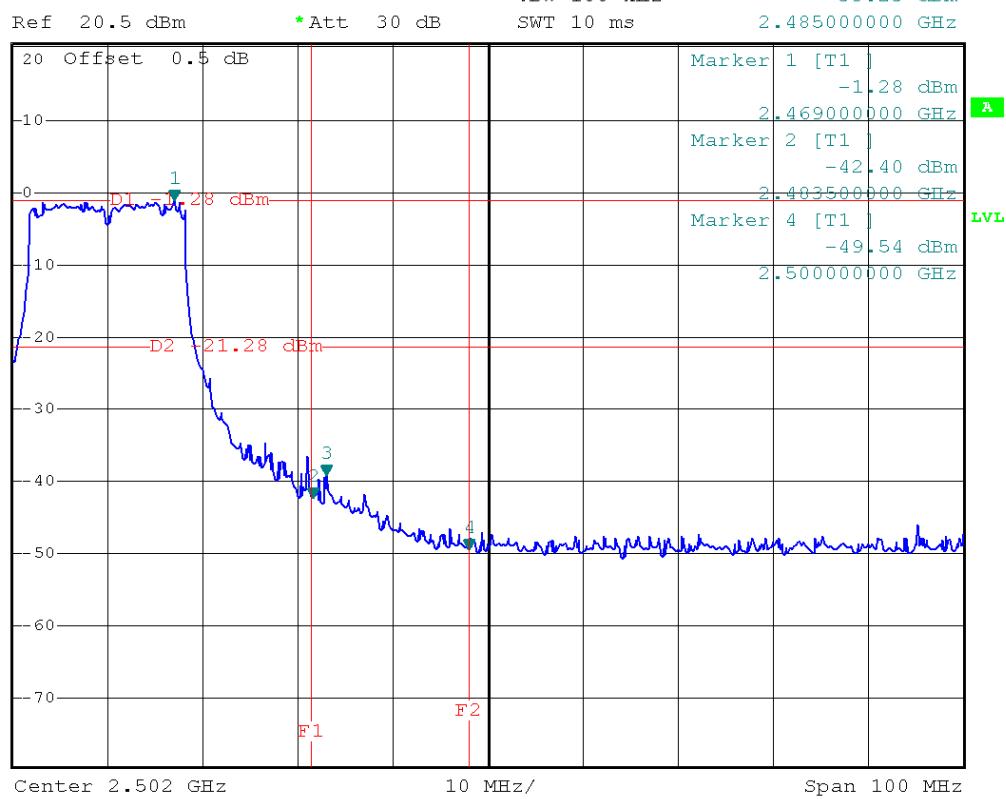




CH01

R/S


Ref 20 dBm *Att 30 dB SWT 2.5 s 24.800240000 GHz

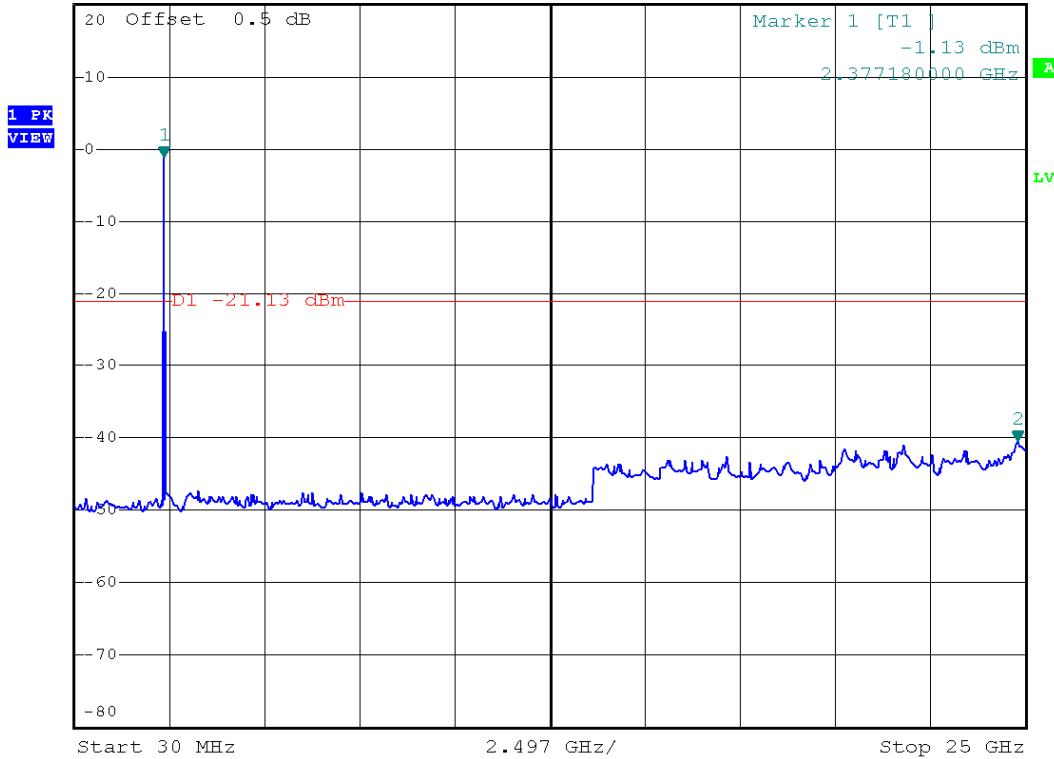

CH06

R/S

Ref 20.5 dBm *Att 30 dB SWT 2.5 s 21.654020000 GHz

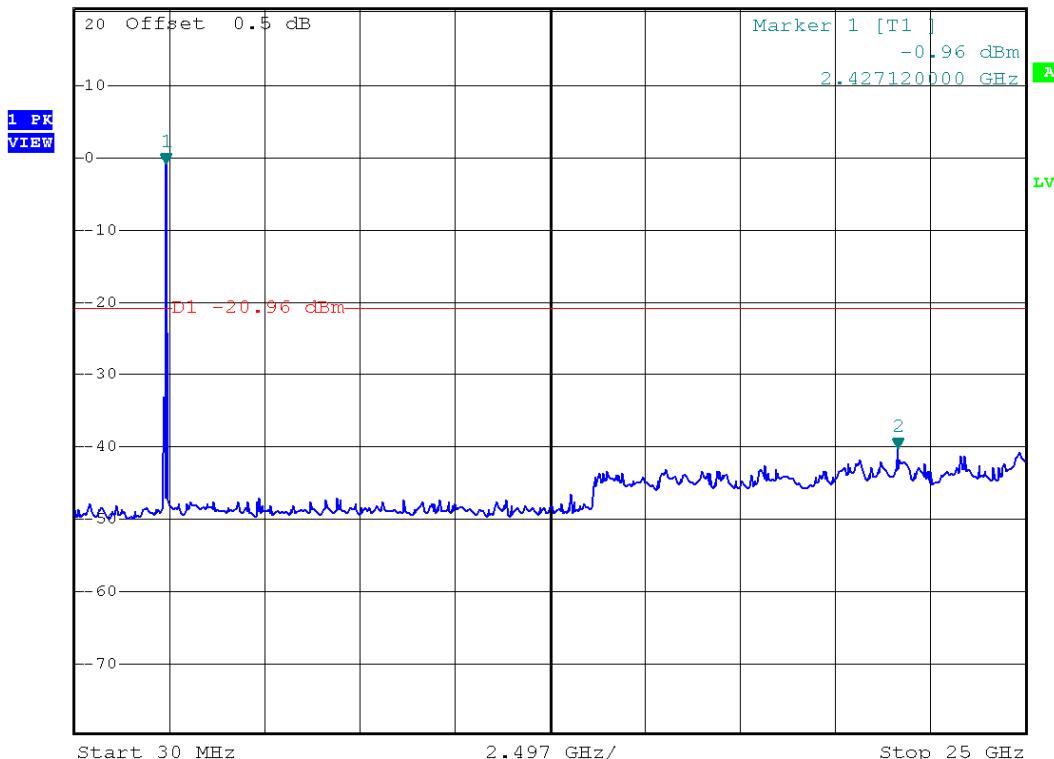




CH11

REF

Ref 20.5 dBm *Att 30 dB

*RBW 100 kHz Marker 2 [T1]
*VBW 100 kHz -41.50 dBm
SWT 2.5 s 21.354380000 GHz

1 PK
VIEW

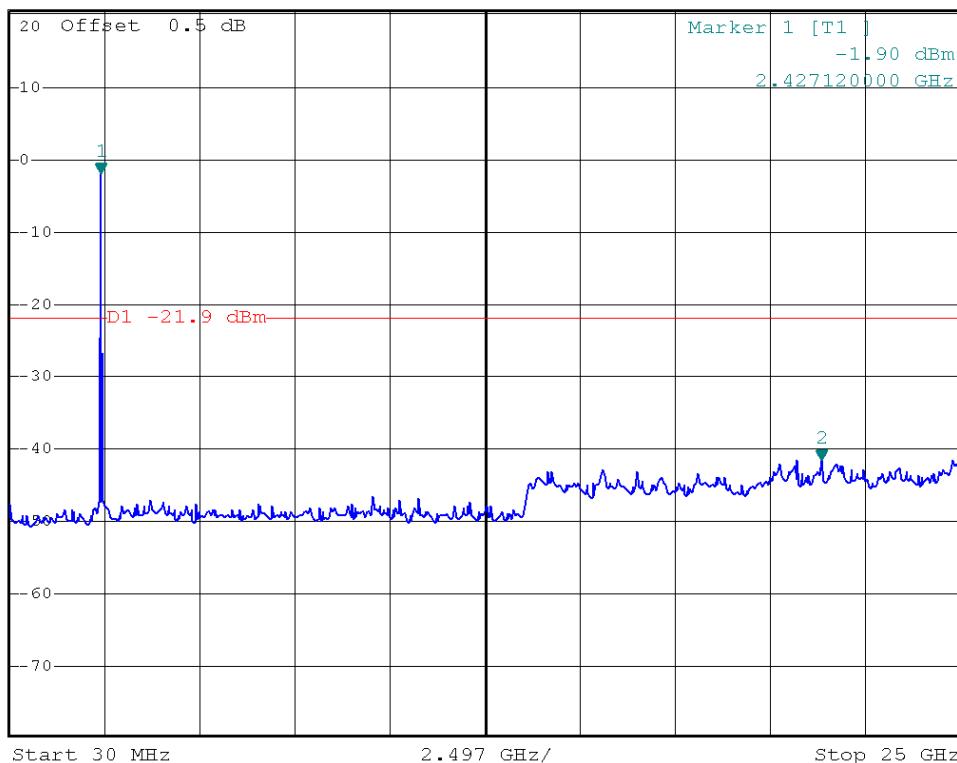

A

LVL



8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

8.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Aug. 31, 2011

Remark: " N/A" denotes No Model Name, Serial No. or No Calibration specified.

8.1.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW=3KHz, VBW=30KHz, Sweep time = 500s.

8.1.3 DEVIATION FROM STANDARD

No deviation.

8.1.4 TEST SETUP




8.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

**8.1.6 TEST RESULTS**


EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH01, CH06, CH11		

Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH01	2412	-17.89	8
CH06	2437	-18.16	8
CH11	2462	-19.55	8

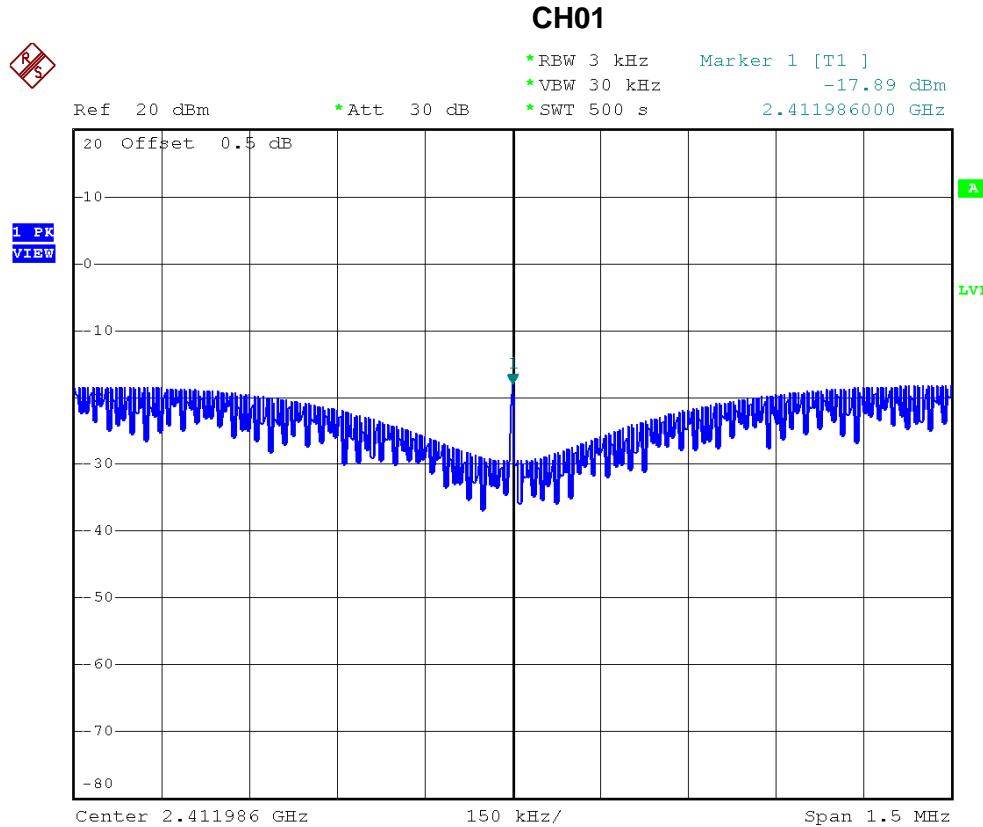




CH06

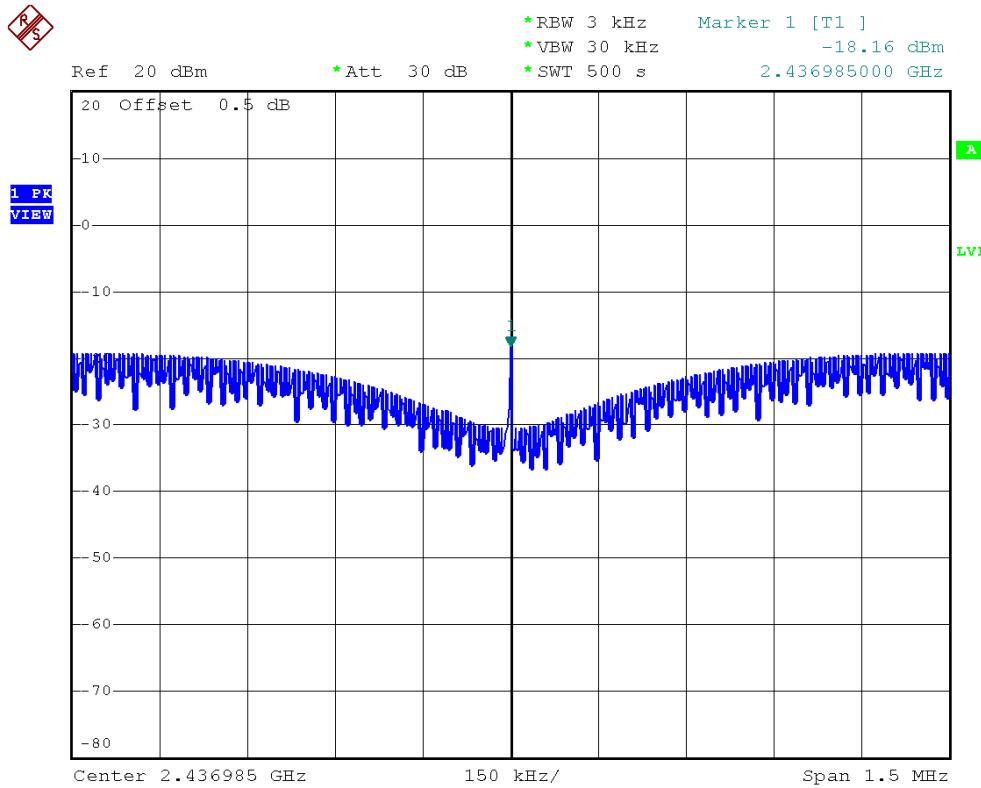


CH11

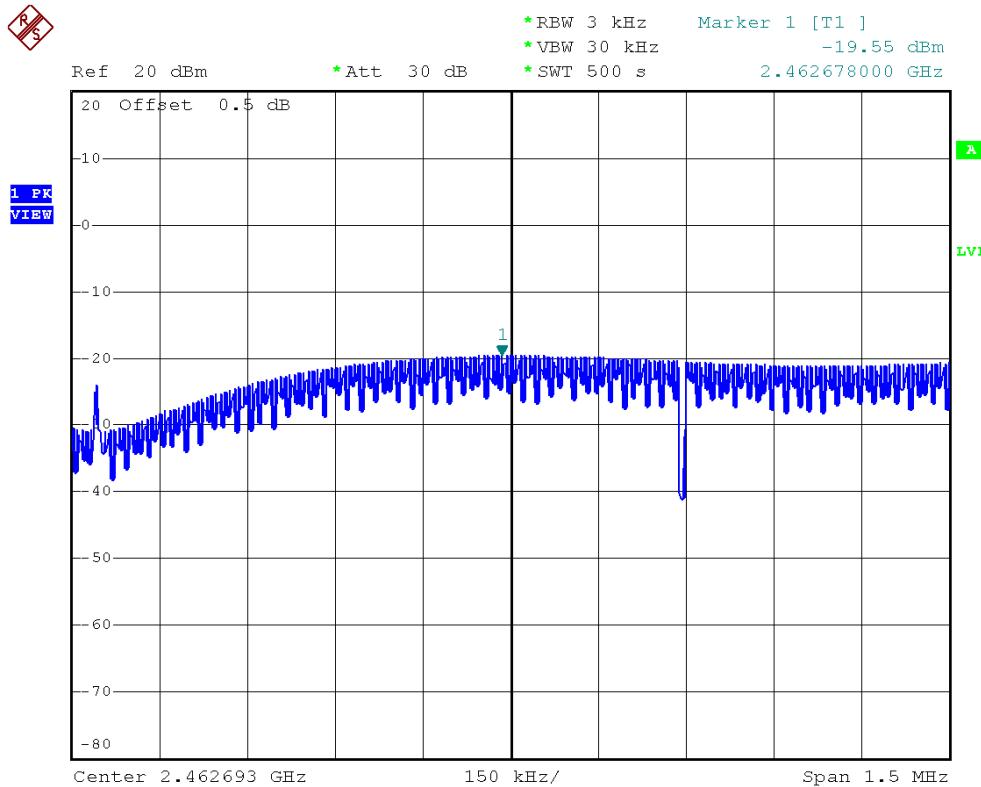




EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g/CH01, CH06, CH11		

Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH01	2412	-9.86	8
CH06	2437	-10.49	8
CH11	2462	-9.29	8

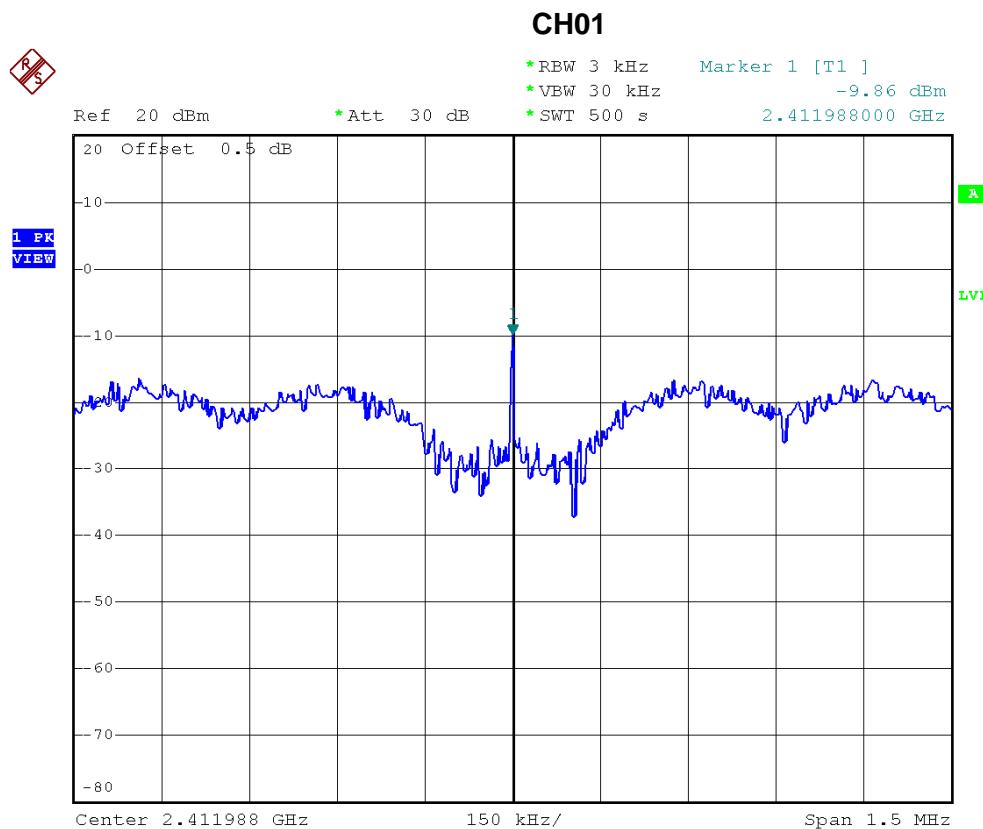




CH06

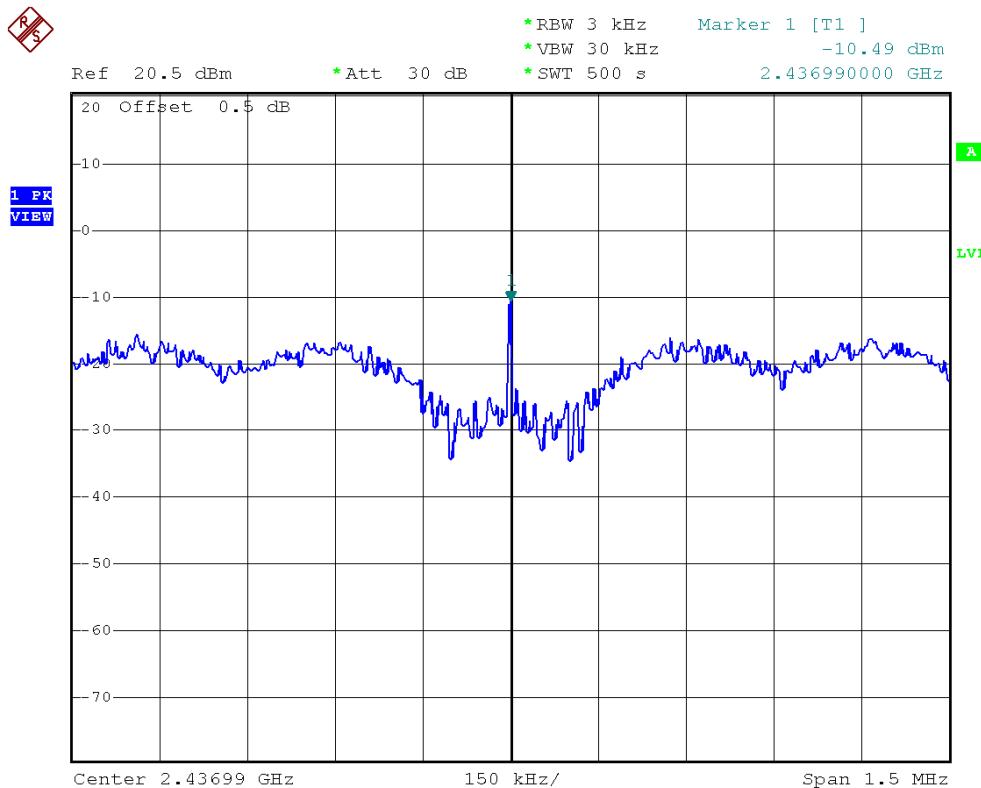

CH11

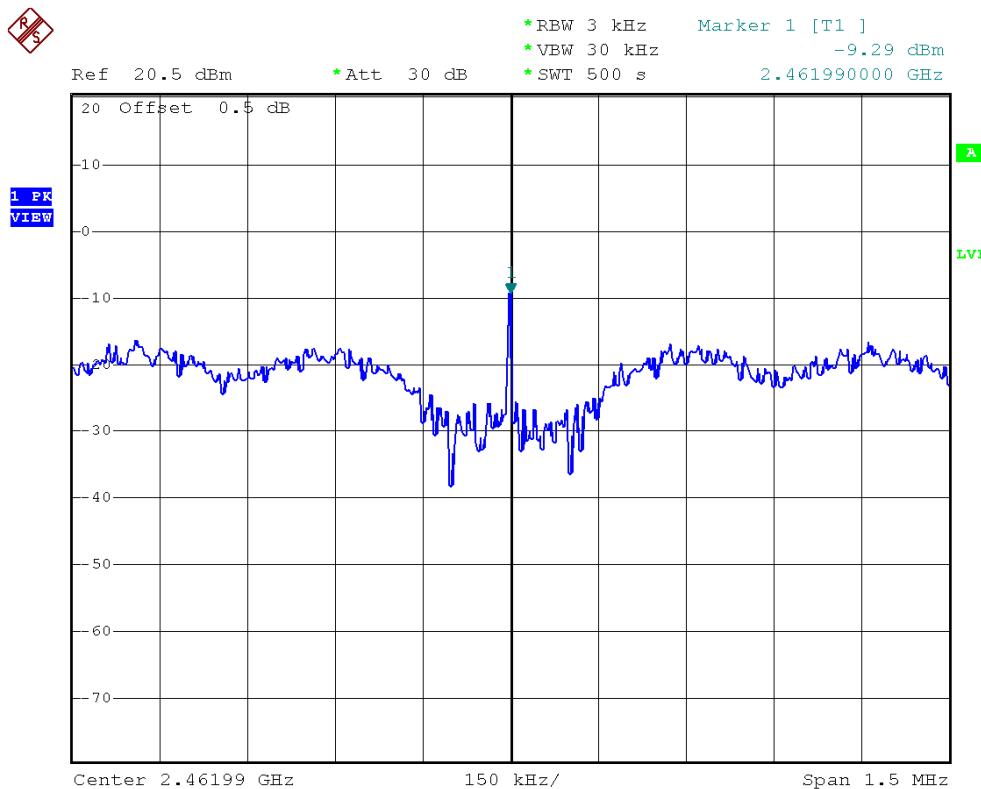



9. RF EXPOSURE TEST

9.1 APPLIED PROCEDURES / LIMIT

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

9.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2487A	6K00004714	Feb. 17, 2012
2	Power Meter Sensor	Anritsu	MA2491A	34138	Feb. 17, 2012

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.

9.1.2 MPE CALCULATION METHOD

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d}$$

$$\text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained



9.1.3 DEVIATION FROM STANDARD

No deviation.

9.1.4 TEST SETUP



9.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

**9.1.6 TEST RESULTS**

EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11b/CH01, CH06, CH11		

Frequency (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
2412	0.0	1.0000	13.2800	21.2814	0.004236	1
2437	0.0	1.0000	12.8600	19.3197	0.003845	1
2462	0.0	1.0000	12.6600	18.4502	0.003672	1



EUT :	A Versatile Multi-Function Terminal	Model Name :	MT688
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz		
Test Mode :	802.11g/CH01, CH06, CH11		

Frequency (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
2412	0.0	1.0000	22.5600	180.3018	0.035888	1
2437	0.0	1.0000	23.3200	214.7830	0.042751	1
2462	0.0	1.0000	23.1600	207.0141	0.041205	1