

Page: 1 of 328

SAR TEST REPORT





The following samples were submitted and identified on behalf of the client as:

Notebook Computer **Equipment Under Test**

acer **Brand Name** N17Q10 Model No. SF714-51T Marketing Name.

Acer Incorporated **Company Name**

8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi, New Taipei City **Company Address**

22181, Taiwan (R.O.C)

IEEE/ANSI C95.1-1992, IEEE 1528-2013, **Standards**

> KDB616217D04v01r02,KDB865664D01v01r04, KDB865664D02v01r02,KDB941225D01v03r01, KDB941225D05v02r05,KDB941225D05Av01r02,

KDB447498D01v06, KDB248227D01v02r02

FCC ID HLZ7265D2

Date of Receipt Jan. 02, 2018

Date of Test(s) Jan. 05, 2018 ~ Jan. 19, 2018

Date of Issue Mar. 08, 2018

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Electronic & Communication Laboratory or testing done by SGS Taiwan Electronic & Communication Laboratory in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Electronic & Communication Laboratory in

Signed on behalf of SGS

Clerk / Ruby Ou	Engineer / Bond Tsai	Asst. Manager / John Yeh
Ruby Ou	BondIsai	John Teh

Date: Mar. 08, 2018

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 2 of 328

Revision History

Report Number	Revision	Description	Issue Date
E5/2018/10002	Rev.00	Initial creation of document	Feb. 09, 2018
E5/2018/10002	Rev.01	1 st modification	Mar. 08, 2018

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 3 of 328

Contents

1. General Information	4
1.1 Testing Laboratory	
1.2 Details of Applicant	
1.3 Description of EUT	5
1.4 Test Environment	139
1.5 Operation Description	139
1.6 Proximity sensor operation description	150
1.7 The SAR Measurement System	160
1.8 System Components	162
1.9 SAR System Verification	164
1.10 Tissue Simulant Fluid for the Frequency Band	166
1.11 Evaluation Procedures	169
1.12 Probe Calibration Procedures	170
1.13 Test Standards and Limits	173
2. Summary of Results	175
3. Simultaneous Transmission Analysis	190
3.1 Estimated SAR calculation	191
4. Instruments List	202
5. Measurements	204
6. SAR System Performance Verification	229
7. DAE & Probe Calibration Certificate	
8. Uncertainty Budget	
9. System Validation from Original Equipment Supplier	
3. System vandation from Original Equipment Supplier	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 4 of 328

1. General Information

1.1 Testing Laboratory

SGS Taiwan Ltd. Electronics & Communication Laboratory				
No. 2, Keji 1st Rd., Guishan Township, Taoyuan County, 33383, Taiwan				
Tel +886-2-2299-3279				
Fax +886-2-2298-0488				
Internet	http://www.tw.sgs.com/			

1.2 Details of Applicant

Company Name	Acer Incorporated
IL.OMNANV AGGRESS	8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi, New Taipei City 22181, Taiwan (R.O.C)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 支股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 5 of 328

1.3 Description of EUT

<u>.</u>	1						
Equipment Under Test	Notebook Computer						
Brand Name	acer						
Model No.	N17Q10						
Marketing Name	SF714-51T	F714-51T					
FCC ID	HLZ7265D2						
Integrated Module	Wireless LAN+BT		Name : In Name : 72		:W		
Integrated Module	GNSS (LTE+GPS)		Name : Fi Name : L8				
Mode of Operation							
	WCDMA	1					
	LTE FDD	1					
Duty Cycle	LTE TDD	0.633					
	WLAN802.11 a/b/g/n(20M/40M)/ ac(20M/40M/80M)			1			
	Bluetooth		1				
	WCDMA Band II		1850	_	1910		
	WCDMA Band IV		1710	_	1755		
	WCDMA Band V		824		849		
TX Frequency Range	LTE FDD Band 2		1850		1910		
(MHz)	LTE FDD Band 4		1710		1755		
	LTE FDD Band 5		824	_	849		
	LTE FDD Band 7		2500		2570		
	LTE FDD Band 12		699	_	716		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 6 of 328

LTE EDD D			
			787
LTE FDD Band 17	704	_	716
LTE FDD Band 26	814	_	849
LTE FDD Band 30	2305	_	2315
LTE FDD Band 38	2570	_	2620
LTE TDD Band 41	2496	_	2690
LTE FDD Band 66	1710	_	1780
WLAN802.11 b/g/n(20M)	2412	_	2472
WLAN802.11 n(40M)	2422	_	2462
WLAN802.11 a/n(20M)/ac(20M) 5.2G	5180	_	5240
WLAN802.11 n(40M)/ac(40M) 5.2G	5190	_	5230
WLAN802.11 ac(80M) 5.2G			
WLAN802.11 a/n(20M)/ac(20M) 5.3G	5260	_	5320
WLAN802.11 n(40M)/ac(40M) 5.3G	5270	_	5310
WLAN802.11 ac(80M) 5.3G		5290	
WLAN802.11 a/n/ac(20M) 5.6G	5500	_	5720
WLAN802.11 n/ac(40M) 5.6G	5510	_	5710
WLAN802.11 ac(80M) 5.6G	5530	_	5690
WLAN802.11 a/n(20M)/ac(20M) 5.8G	5745	_	5825
WLAN802.11 n(40M)/ac(40M) 5.8G	5710	_	5795
WLAN802.11 ac(80M) 5.8G		5775	
Bluetooth	2402	_	2480
WCDMA Band II	9262	_	9538
WCDMA Band IV	1312	_	1513
WCDMA Band V	4132	_	4233
LTE FDD Band 2	18607	_	19193
LTE FDD Band 4	19957	_	20393
LTE FDD Band 5	20407	_	20643
	LTE FDD Band 30 LTE FDD Band 38 LTE TDD Band 41 LTE FDD Band 66 WLAN802.11 b/g/n(20M) WLAN802.11 a/n(20M)/ac(20M) 5.2G WLAN802.11 a/n(20M)/ac(40M) 5.2G WLAN802.11 ac(80M) 5.2G WLAN802.11 ac(80M) 5.2G WLAN802.11 a/n(20M)/ac(20M) 5.3G WLAN802.11 a/n(20M)/ac(40M) 5.3G WLAN802.11 ac(80M) 5.3G WLAN802.11 ac(80M) 5.3G WLAN802.11 ac(80M) 5.6G WLAN802.11 ac(80M) 5.6G WLAN802.11 ac(80M) 5.6G WLAN802.11 ac(80M) 5.6G WLAN802.11 ac(80M) 5.8G Bluetooth WCDMA Band II WCDMA Band IV WCDMA Band V LTE FDD Band 2 LTE FDD Band 4	LTE FDD Band 17 LTE FDD Band 26 LTE FDD Band 30 LTE FDD Band 38 LTE FDD Band 41 LTE FDD Band 66 LTE FDD Band 66 WLAN802.11 b/g/n(20M) WLAN802.11 n(40M) WLAN802.11 a/n(20M)/ac(20M) 5.2G WLAN802.11 a/n(20M)/ac(20M) 5.2G WLAN802.11 a/n(20M)/ac(20M) 5.3G WLAN802.11 a/n(20M)/ac(20M) 5.3G WLAN802.11 a/n(20M)/ac(20M) 5.3G WLAN802.11 a/n(20M)/ac(40M) 5.3G WLAN802.11 a/n(20M)/ac(40M) 5.3G WLAN802.11 a/n(20M)/ac(40M) 5.6G WLAN802.11 a/n(20M)/ac(20M) 5.6G WLAN802.11 a/n(20M)/ac(20M) 5.8G WLAN802.11 a/n(20M)/ac(20M) 5.8G S510 WLAN802.11 a/n(20M)/ac(20M) 5.8G WLAN802.11 a/n(20M)/ac(40M) 5.8G Bluetooth WLAN802.11 ac(80M) 5.8G Bluetooth WCDMA Band II 9262 WCDMA Band V LTE FDD Band 2 LTE FDD Band 4 19957	LTE FDD Band 17 LTE FDD Band 26 LTE FDD Band 30 LTE FDD Band 38 LTE FDD Band 41 LTE FDD Band 66 LTE FDD Band 66 LTE FDD Band 66 WLAN802.11 b/g/n(20M) WLAN802.11 n(40M) WLAN802.11 a/n(20M)/ac(20M) 5.2G WLAN802.11 n(40M)/ac(40M) 5.2G WLAN802.11 a/(20M)/ac(20M) 5.3G WLAN802.11 a/(20M)/ac(20M) 5.3G WLAN802.11 a/(20M)/ac(20M) 5.3G WLAN802.11 n(40M)/ac(40M) 5.3G WLAN802.11 n(40M)/ac(40M) 5.3G WLAN802.11 n(40M)/ac(40M) 5.3G WLAN802.11 a/n/ac(20M) 5.6G WLAN802.11 a/n/ac(20M) 5.6G WLAN802.11 a/(20M) 5.8G F775 Bluetooth WCDMA Band II WCDMA Band IV H312 LTE FDD Band 2 LTE FDD Band 4 H9957 LTE FDD Band 4

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 7 of 328

	LTE FDD Band 7	20775	_	21425
	LTE FDD Band 12	23017	_	23173
	LTE FDD Band 13	23205	_	23255
	LTE FDD Band 17	23755	_	23825
	LTE FDD Band 26	26697	_	27033
	LTE FDD Band 30	27685	_	27735
	LTE FDD Band 38	37775	_	38225
	LTE TDD Band 41	39675	_	41565
	LTE FDD Band 66	131979	_	132665
	WLAN802.11 b/g/n(20M)	1	_	13
	WLAN802.11 n(40M)	3	_	11
Channel Number	WLAN802.11 a/n(20M)/ac(20M) 5.2G	36	_	48
(ARFCN)	WLAN802.11 n(40M)/ac(40M) 5.2G	38	_	46
	WLAN802.11 ac(80M) 5.2G		42	
	WLAN802.11 a/n(20M)/ac(20M) 5.3G	52	_	64
	WLAN802.11 n(40M)/ac(40M) 5.3G	54	_	62
	WLAN802.11 ac(80M) 5.3G		58	
	WLAN802.11 a/n/ac(20M) 5.6G	100	_	144
	WLAN802.11 n/ac(40M) 5.6G	102	_	142
	WLAN802.11 ac(80M) 5.6G	106	_	138
	WLAN802.11 a/n(20M)/ac(20M) 5.8G	149	_	165
	WLAN802.11 n(40M)/ac(40M) 5.8G	142	_	159
	WLAN802.11 ac(80M) 5.8G		155	
	Bluetooth	0	_	78

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 8 of 328

	Max. SAR (1 g)	(Unit: W/Kg)		
Band	Measured	Reported	Channel	Position
WCDMA Band II	1.19	1.19	9262	Bottom side
WCDMA Band IV	1.04	1.04	1513	Bottom side
WCDMA Band V	1.05	1.05	4132	Bottom side
LTE FDD Band 2	1.01	1.15	19100	Bottom side
LTE FDD Band 5	1.01	1.02	20450	Bottom side
LTE FDD Band 7	1.16	1.16	21100	Bottom side
LTE FDD Band 12	0.86	0.91	23130	Bottom side
LTE FDD Band 13	0.81	0.92	23230	Bottom side
LTE FDD Band 17	0.83	0.86	23780	Bottom side
LTE FDD Band 26	0.98	1.02	26865	Bottom side
LTE FDD Band 30	1.16	1.17	27710	Bottom side
LTE FDD Band 38	1.19	1.24	37850	Bottom side
LTE TDD Band 41	1.12	1.13	41055	Bottom side
LTE TDD Band 66	1.16	1.17	132572	Bottom side

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 9 of 328

	Max. SAR (1 g) (Unit: W/Kg)								
Antenna	Band	Measured	Reported	Channel	Position				
	WLAN802.11 b	0.02	0.02	6	Bottom side				
	WLAN802.11 n(40M) 5.2G	0.03	0.03	46	Bottom side				
Main	WLAN802.11 n(40M) 5.3G	0.03	0.03	54	Bottom side				
	WLAN802.11 ac(80M) 5.6G	0.07	0.07	138	Bottom side				
	WLAN802.11 ac(80M) 5.8G	0.05	0.05	155	Bottom side				
	WLAN802.11 b	0.01	0.01	6	Bottom side				
	Bluetooth (GFSK)	0.00	0.00	0	Bottom side				
	WLAN802.11 n(40M) 5.2G	0.02	0.02	46	Bottom side				
Aux	WLAN802.11 n(40M) 5.3G	0.02	0.02	54	Bottom side				
	WLAN802.11 ac(80M) 5.6G	0.04	0.04	138	Bottom side				
	WLAN802.11 ac(80M) 5.8G	0.02	0.02	155	Bottom side				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 10 of 328

WWAN antenna information:

Vendor		WNC						
Antenna		Main (PIFA)						
Part Number		81EAAL15.GJT						
Frequency	1907.6	907.6 1752.6 846.6 1900 1745 844 2560 711						
Gain (dBi)	-1.86	-1.19	-1.97	-2.27	-1.19	-1.97	-3.11	-2.36

Vendor		WNC						
Antenna		Main (PIFA)						
Part Number		81EAAL15.GJT						
Frequency	782	782 711 841.5 2310 2610 2680 1770						
Gain (dBi)	-1.52	-2.36	-1.70	-3.40	-3.29	-2.92	-1.19	

WLAN / Bluetooth antenna information:

Vendor		W	NC			WNC			
Antenna		Main (PIFA)				Aux (PIFA)			
Part Number		81EAAL15.GJ5				81EAAL15.GJ5			
Frequency	2.4G	5.2G	5.5G	5.8G	2.4G	5.2G	5.5G	5.8G	
Gain (dBi)	2.13	2.13 0.20 1.92 1.35			2.16	1.15	1.07	1.02	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 11 of 328

WCDMA Band II / Band IV / Band V - HSDPA / HSUPA conducted power table (Full power):

Unit: dBm

Jiiit. Gelii								
	Band							
	TX Channel							
Fre	equency (MHz)	1852.4	1880	1907.6				
Max. Rated Avg.	Power+Max. Tolerance (dBm)		24.00					
3GPP Rel 99	RMC 12.2Kbps	23.93	23.88	23.61				
	HSDPA Subtest-1	23.80	23.78	23.54				
3GPP Rel 5	HSDPA Subtest-2	23.78	23.75	23.47				
JOFF Ner J	HSDPA Subtest-3	23.80	23.75	23.40				
	HSDPA Subtest-4	23.76	23.72	23.41				
	HSUPA Subtest-1	22.69	22.64	22.29				
	HSUPA Subtest-2	20.51	20.47	20.15				
3GPP Rel 6	HSUPA Subtest-3	21.15	21.21	20.89				
	HSUPA Subtest-4	20.78	20.72	20.45				
	HSUPA Subtest-5	22.70	22.70	22.40				

	Band	V	WCDMA IV 12 1412 1513			
	TX Channel					
Fre	Frequency (MHz)					
Max. Rated Avg. I	Power+Max. Tolerance (dBm)		24.00			
3GPP Rel 99	RMC 12.2Kbps	23.77	23.97	23.99		
	HSDPA Subtest-1	23.60	23.77	23.84		
3GPP Rel 5	HSDPA Subtest-2	23.59	23.78	23.85		
JOFF Nel J	HSDPA Subtest-3	23.60	23.78	23.82		
	HSDPA Subtest-4	23.59	23.78	23.83		
	HSUPA Subtest-1	22.52	22.73	22.80		
	HSUPA Subtest-2	20.30	20.51	20.60		
3GPP Rel 6	HSUPA Subtest-3	21.10	21.25	21.28		
	HSUPA Subtest-4	20.61	20.78	20.94		
	HSUPA Subtest-5	22.60	22.80	22.84		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Page: 12 of 328

	Band	1	WCDMA \	/
	4132	4183	4233	
Fre	equency (MHz)	826.4	836.6	846.6
Max. Rated Avg. I	Power+Max. Tolerance (dBm)		24.00	
3GPP Rel 99	RMC 12.2Kbps	23.55	23.39	23.33
	HSDPA Subtest-1	23.39	23.15	23.23
3GPP Rel 5	HSDPA Subtest-2	23.39	23.17	23.14
JOFF Nel J	HSDPA Subtest-3	23.38	23.20	23.17
	HSDPA Subtest-4	23.41	23.22	23.20
	HSUPA Subtest-1	22.54	22.74	22.27
	HSUPA Subtest-2	20.31	20.56	20.11
3GPP Rel 6	HSUPA Subtest-3	21.04	21.35	20.75
	HSUPA Subtest-4	20.55	20.84	20.42
	HSUPA Subtest-5	22.50	22.80	22.40

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_end_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this onlineful.

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 13 of 328

WCDMA Band II / Band IV / Band V - HSDPA / HSUPA conducted power table(Reduced power):

Unit: dBm

onit. abin									
	Band	,	WCDMA I	9400 9538 1880 1907.6 16.50 16.32 16.32 16.26 16.30 16.15					
	9262	9400	9538						
Fre	Frequency (MHz)								
Max. Rated Avg.	Power+Max. Tolerance (dBm)		16.50						
3GPP Rel 99	RMC 12.2Kbps	16.49	16.32	16.26					
	HSDPA Subtest-1	16.46	16.30	16.15					
3GPP Rel 5	HSDPA Subtest-2	16.48	16.31	16.11					
SGFF Rei S	HSDPA Subtest-3	16.47	16.30	16.10					
	HSDPA Subtest-4	16.44	16.29	16.07					
	HSUPA Subtest-1	16.43	16.18	16.00					
	HSUPA Subtest-2	16.36	16.19	15.98					
3GPP Rel 6	HSUPA Subtest-3	16.39	16.21	16.01					
	HSUPA Subtest-4	16.42	16.22	15.97					
	HSUPA Subtest-5	16.41	16.20	15.99					

	Band	WCDMA IV			
	1312	1412	1513		
Fre	Frequency (MHz)				
Max. Rated Avg. I	Power+Max. Tolerance (dBm)	16.50			
3GPP Rel 99	RMC 12.2Kbps	16.30	16.38	16.49	
	HSDPA Subtest-1	16.23	16.36	16.47	
3GPP Rel 5	HSDPA Subtest-2	16.24	16.35	16.42	
JOHN REID	HSDPA Subtest-3	16.22	16.35	16.43	
	HSDPA Subtest-4	16.23	16.36	16.41	
	HSUPA Subtest-1	16.22	16.35	16.48	
	HSUPA Subtest-2	16.21	16.35	16.44	
3GPP Rel 6	HSUPA Subtest-3	16.20	16.34	16.47	
	HSUPA Subtest-4	16.24	16.36	16.46	
	HSUPA Subtest-5	16.21	16.36	16.44	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488

prosecuted to the fullest extent of the law.



Page: 14 of 328

	Band				
	4132	4183	4233		
Fre	equency (MHz)	826.4	836.6	846.6	
Max. Rated Avg. I	Power+Max. Tolerance (dBm)		21.50		
3GPP Rel 99	RMC 12.2Kbps	21.49	21.25	21.43	
	HSDPA Subtest-1	21.44	21.13	21.39	
3GPP Rel 5	HSDPA Subtest-2	21.45	21.16	21.38	
JOFF Nei J	HSDPA Subtest-3	21.47	21.19	21.36	
	HSDPA Subtest-4	21.48	21.18	21.35	
	HSUPA Subtest-1	21.47	21.17	21.41	
	HSUPA Subtest-2	21.46	21.15	21.39	
3GPP Rel 6	HSUPA Subtest-3	21.46	21.19	21.38	
	HSUPA Subtest-4	21.45	21.18	21.36	
	HSUPA Subtest-5	21.48	21.20	21.37	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 15 of 328

LTE FDD Band 2 / Band 4 / Band 5 / Band7 / Band 12 / Band 13 / Band 17 / Band 26 /Band 30 / Band 38 / Band 41 / Band 66 nower table(Full nower):

				FDD Band 2		ole(Full p	,	
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1860	18700	23.66	24	0
			0	1880	18900	23.37	24	0
				1900	19100	23.37	24	0
				1860	18700	23.27	24	0
		1 RB	50	1880	18900	23.50	24	0
				1900	19100	23.26	24	0
			99	1860	18700	23.31	24	0
				1880	18900	23.26	24	0
				1900	19100	23.16	24	0
			0	1860	18700	22.39	23	0-1
	QPSK			1880	18900	22.35	23	0-1
		50 RB		1900	19100	21.95	23	0-1
				1860	18700	22.42	23	0-1
			25	1880	18900	22.29	23	0-1
				1900	19100	22.00	23	0-1
				1860	18700	22.37	23	0-1
			50	1880	18900	22.22	23	0-1
				1900	19100	22.09	23	0-1
				1860	18700	22.50	23	0-1
		100RB		1880	18900	22.47	23	0-1
20				1900	19100	22.18	23	0-1
20		1 RB	0	1860	18700	22.94	23	0-1
				1880	18900	22.92	23	0-1
				1900	19100	22.46	23	0-1
				1860	18700	22.96	23	0-1
			50	1880	18900	22.71	23	0-1
				1900	19100	22.38	23	0-1
				1860	18700	22.72	23	0-1
			99	1880	18900	22.44	23	0-1
				1900	19100	22.52	23	0-1
				1860	18700	21.43	22	0-2
	16-QAM		0	1880	18900	21.37	22	0-2
				1900	19100	21.05	22	0-2
				1860	18700	21.32	22	0-2
		50 RB	25	1880	18900	21.47	22	0-2
				1900	19100	20.97	22	0-2
				1860	18700	21.43	22	0-2
			50	1880	18900	21.39	22	0-2
				1900	19100	21.12	22	0-2
				1860	18700	21.49	22	0-2
		100)RB	1880	18900	21.60	22	0-2
				1900	19100	21.13	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 16 of 328

				FDD Band 2				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1857.5	18675	23.31	24	0
			0	1880	18900	23.22	24	0
				1902.5	19125	22.88	24	0
			36	1857.5	18675	23.05	24	0
		1 RB		1880	18900	23.20	24	0
				1902.5	19125	22.95	24	0
				1857.5	18675	23.08	24	0
			74	1880	18900	23.07	24	0
				1902.5	19125	22.88	24	0
			0	1857.5	18675	22.21	23	0-1
	QPSK			1880	18900	22.23	23	0-1
				1902.5	19125	21.89	23	0-1
		36 RB	18	1857.5	18675	22.16	23	0-1
				1880	18900	22.25	23	0-1
				1902.5	19125	21.91	23	0-1
				1857.5	18675	22.15	23	0-1
			37	1880	18900	22.12	23	0-1
				1902.5	19125	21.99	23	0-1
				1857.5	18675	22.20	23	0-1
		75	RB	1880	18900	22.23	23	0-1
				1902.5	19125	22.00	23	0-1
15				1857.5	18675	22.64	23	0-1
			0	1880	18900	22.07	23	0-1
				1902.5	19125	22.27	23	0-1
				1857.5	18675	22.75	23	0-1
		1 RB	36	1880	18900	22.73	23	0-1
				1902.5	19125	22.62	23	0-1
				1857.5	18675	22.41	23	0-1
			74	1880	18900	22.67	23	0-1
				1902.5	19125	22.36	23	0-1
				1857.5	18675	21.26	22	0-2
	16-QAM		0	1880	18900	21.34	22	0-2
				1902.5	19125	20.78	22	0-2
				1857.5	18675	21.17	22	0-2
		36 RB	18	1880	18900	21.26	22	0-2
		33113		1902.5	19125	20.87	22	0-2
				1857.5	18675	21.22	22	0-2
			37	1880	18900	21.27	22	0-2
			"	1902.5	19125	20.88	22	0-2
				1857.5	18675	21.18	22	0-2
		75	75RB		18900	21.16	22	0-2
		/3		1880 1902.5	19125	20.95	22	0-2
				1802.0	19120	20.90	22	U-Z

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 17 of 328

				FDD Band 2				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1855	18650	23.42	24	0
			0	1880	18900	23.38	24	0
				1905	19150	22.96	24	0
			25	1855	18650	22.94	24	0
		1 RB		1880	18900	23.06	24	0
				1905	19150	22.93	24	0
				1855	18650	23.18	24	0
			49	1880	18900	23.23	24	0
				1905	19150	23.09	24	0
			0	1855	18650	22.24	23	0-1
	QPSK			1880	18900	22.32	23	0-1
		25 RB		1905	19150	21.86	23	0-1
				1855	18650	22.21	23	0-1
			12	1880	18900	22.28	23	0-1
				1905	19150	21.95	23	0-1
				1855	18650	22.17	23	0-1
			25	1880	18900	22.19	23	0-1
				1905	19150	22.06	23	0-1
			•	1855	18650	22.19	23	0-1
		50	50RB		18900	22.19	23	0-1
40				1905	19150	21.91	23	0-1
10				1855	18650	22.81	23	0-1
			0	1880	18900	22.36	23	0-1
				1905	19150	22.31	23	0-1
				1855	18650	22.94	23	0-1
		1 RB	25	1880	18900	22.22	23	0-1
				1905	19150	22.16	23	0-1
				1855	18650	22.44	23	0-1
			49	1880	18900	22.76	23	0-1
				1905	19150	22.07	23	0-1
				1855	18650	21.28	22	0-2
	16-QAM		0	1880	18900	21.41	22	0-2
				1905	19150	20.92	22	0-2
				1855	18650	21.38	22	0-2
		25 RB	12	1880	18900	21.28	22	0-2
				1905	19150	21.01	22	0-2
				1855	18650	21.19	22	0-2
			25	1880	18900	21.31	22	0-2
				1905	19150	21.10	22	0-2
			1		18650	21.25	22	0-2
		50	RB	1880	18900	21.25	22	0-2
				1905	19150	20.97	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 18 of 328

				FDD Band 2				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1852.5	18625	23.17	24	0
			0	1880	18900	23.22	24	0
				1907.5	19175	22.94	24	0
				1852.5	18625	23.10	24	0
		1 RB	12	1880	18900	23.28	24	0
				1907.5	19175	22.94	24	0
				1852.5	18625	23.26	24	0
			24	1880	18900	23.00	24	0
				1907.5	19175	22.97	24	0
			0	1852.5	18625	22.91	23	0-1
	QPSK			1880	18900	22.92	23	0-1
				1907.5	19175	22.56	23	0-1
				1852.5	18625	22.89	23	0-1
		12 RB	6	1880	18900	22.90	23	0-1
				1907.5	19175	22.54	23	0-1
				1852.5	18625	22.89	23	0-1
			13	1880	18900	22.93	23	0-1
				1907.5	19175	22.96	23	0-1
			•	1852.5	18625	22.19	23	0-1
		25	RB	1880	18900	22.19	23	0-1
_		1		1907.5	19175	21.94	23	0-1
5				1852.5	18625	22.68	23	0-1
			0	1880	18900	22.15	23	0-1
			-	1907.5	19175	22.24	23	0-1
				1852.5	18625	22.60	23	0-1
		1 RB	12	1880	18900	22.53	23	0-1
				1907.5	19175	22.31	23	0-1
				1852.5	18625	22.72	23	0-1
			24	1880	18900	22.57	23	0-1
				1907.5	19175	22.11	23	0-1
				1852.5	18625	21.99	22	0-2
	16-QAM		0	1880	18900	21.96	22	0-2
				1907.5	19175	21.57	22	0-2
				1852.5	18625	21.97	22	0-2
		12 RB	6	1880	18900	21.97	22	0-2
				1907.5	19175	21.65	22	0-2
				1852.5	18625	21.97	22	0-2
			13	1880	18900	21.97	22	0-2
				1907.5	19175	21.95	22	0-2
			1		18625	21.26	22	0-2
		25	RB	1880	18900	21.21	22	0-2
				1907.5	19175	20.97	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 19 of 328

				FDD Band 2				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1851.5	18615	23.18	24	0
			0	1880	18900	23.10	24	0
				1908.5	19185	22.94	24	0
				1851.5	18615	23.13	24	0
		1 RB	7	1880	18900	23.23	24	0
				1908.5	19185	22.89	24	0
				1851.5	18615	22.93	24	0
			14	1880	18900	23.10	24	0
				1908.5	19185	22.83	24	0
			0	1851.5	18615	22.18	23	0-1
	QPSK			1880	18900	22.17	23	0-1
				1908.5	19185	21.89	23	0-1
		8 RB		1851.5	18615	22.17	23	0-1
			4	1880	18900	22.16	23	0-1
				1908.5	19185	21.81	23	0-1
				1851.5	18615	22.17	23	0-1
			7	1880	18900	22.19	23	0-1
				1908.5	19185	21.85	23	0-1
				1851.5	18615	22.19	23	0-1
		15RB		1880	18900	22.15	23	0-1
3			T	1908.5	19185	21.87	23	0-1
		1 RB	0	1851.5	18615	22.34	23	0-1
				1880	18900	22.79	23	0-1
				1908.5	19185	22.13	23	0-1
			_	1851.5	18615	22.99	23	0-1
			7	1880	18900	22.56	23	0-1
				1908.5	19185	22.09	23	0-1
			4.4	1851.5	18615	22.47	23	0-1
			14	1880	18900	22.33	23	0-1
				1908.5	19185	22.71	23	0-1
	16 0 4 14			1851.5	18615	21.25	22	0-2
	16-QAM		0	1880	18900	21.18	22	0-2
				1908.5	19185	20.88	22	0-2
		0.00		1851.5	18615	21.19	22	0-2
		8 RB	4	1880	18900	21.30	22	0-2
				1908.5	19185	20.81	22	0-2
			7	1851.5	18615	21.12	22	0-2
			7	1880	18900	21.11	22	0-2
				1908.5 1851.5	19185	20.86	22	0-2
		4 5	15RB		18615	21.20	22	0-2
		15	ND	1880	18900	21.19	22	0-2
				1908.5	19185	20.91	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_end_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this onlineful.

f (886-2) 2298-0488

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 20 of 328

				FDD Band 2											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)							
				1850.7	18607	23.19	24	0							
			0	1880	18900	23.24	24	0							
				1909.3	19193	22.94	24	0							
				1850.7	18607	23.12	24	0							
		1 RB	2	1880	18900	23.33	24	0							
				1909.3	19193	22.89	24	0							
				1850.7	18607	23.24	24	0							
			5	1880	18900	23.20	24	0							
				1909.3	19193	22.88	24	0							
				1850.7	18607	22.91	23	0							
	QPSK		0	1880	18900	22.97	23	0							
				1909.3	19193	22.66	23								
				1850.7	18607	22.92	23								
		3 RB	2	1880	18900	22.94	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0							
				1909.3	19193	22.55	23								
				1850.7	18607	22.91	23								
			3	1880	18900	22.97	23								
				1909.3	19193	22.85	23								
				1850.7	18607	22.20	23								
		6F	RB	1880	18900	22.23	23								
				1909.3	19193	21.91	23								
1.4				1850.7	18607	22.39	23								
			0	1880	18900	22.53	23								
				1909.3	19193	22.08	23								
				1850.7	18607	22.31	23								
		1 RB	2	1880	18900	22.16	23								
				1909.3	19193	21.88	23								
				1850.7	18607	22.66	23								
			5	1880	18900	22.72	23	Allowed per 3GPP(dB) O O O O O O O O O O O O O O O O O O							
				1909.3	19193	22.24	23								
				1850.7	18607	22.26	23								
	16-QAM		0	1880	18900	22.32	23								
				1909.3	19193	21.85	23								
				1850.7	18607	22.33	23	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0							
		3 RB	2	1880	18900	22.38	23								
		J.\D	_	1909.3	19193	21.94	23								
				1850.7	18607	21.99	23								
			3	1880	18900	22.39	23	+							
				1909.3	19193	22.04	23								
				1850.7	18607	21.23	22								
		61	RB	1880	18900	21.23	22								
	6RB		-	1909.3	19193	20.85									
				1909.3	19193	20.85	22	0-2							

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 21 of 328

	FDD Band 4											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1720	20050	23.19	24	0				
			0	1732.5	20175	23.40	24					
				1745	20300	23.18	24					
				1720	20050	23.25	24	0				
		1 RB	50	1732.5	20175	23.13	24	0				
				1745	20300	23.26	24	0				
				1720	20050	23.15	24	0				
			99	1732.5	20175	23.14	24	0				
				1745	20300	23.61	24	0				
				1720	20050	22.39	23	0-1				
	QPSK		0	1732.5	20175	22.29	23	0-1				
				1745	20300	22.20	23	0-1				
				1720	20050	22.25	23					
		50 RB	25	1732.5	20175	22.16	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				1745	20300	22.32	23					
				1720	20050	22.25	23	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
		50	50	1732.5	20175	22.09	23					
				1745	20300	22.46	23					
				1720	20050	22.41	23					
		100	ORB	1732.5	20175	22.29	23					
				1745	20300	22.53	23	0-1				
20				1720	20050	22.51	23	0-1				
			0	1732.5	20175	22.50	23	0-1				
				1745	20300	22.40	23	0-1				
				1720	20050	22.64	23	0-1				
		1 RB	50	1732.5	20175	22.44	23	0-1				
				1745	20300	22.92	23	0-1				
				1720	20050	22.63	23	0-1				
			99	1732.5	20175	22.81	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				1745	20300	22.42	23	0-1				
				1720	20050	21.48	22	0-2				
	16-QAM		0	1732.5	20175	21.28	22	0-2				
				1745	20300	21.20	22	0-2				
				1720	20050	21.36	22	0-2				
		50 RB	25	1732.5	20175	21.24	22	0-2				
				1745	20300	21.37	22	0-1 0-1 0-1 0-1 0-1 0-1 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2				
				1720	20050	21.27	22	0-2				
			50	1732.5	20175	21.17	22	0-2				
				1745	20300	21.63	22	0-2				
				1720	20050	21.47	22	0-2				
		100	ORB	1732.5	20175	21.38	22	0-2				
				1745	20300	21.53	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 22 of 328

	FDD Band 4											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1717.5	20025	23.12	24	0				
			0	1732.5	20175	23.14	24	0				
				1747.5	20325	23.21	24	0				
				1717.5	20025	23.29	24	0				
		1 RB	36	1732.5	20175	23.26	24	0				
				1747.5	20325	23.54	24	0				
				1717.5	20025	23.17	24	0				
			74	1732.5	20175	23.07	24	0				
				1747.5	20325	23.31	24	0				
				1717.5	20025	22.35	23	0-1				
	QPSK		0	1732.5	20175	22.24	23	0-1				
				1747.5	20325	22.22	23					
				1717.5	20025	22.35	23					
		36 RB	18	1732.5	20175	22.24	23	_				
				1747.5	20325	22.55	23	0-1				
				1717.5	20025	22.29	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-				
			37	1732.5	20175	22.14	23					
				1747.5	20325	22.60	23	0-1				
				1717.5	20025	22.39	23					
		75	RB	1732.5	20175	22.27	23	0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1				
15				1747.5	20325	22.63	23					
				1717.5	20025	22.81	23					
			0	1732.5	20175	22.63	23	_				
				1747.5	20325	22.90	23					
				1717.5	20025	22.62	23	_				
		1 RB	36	1732.5	20175	22.30	23					
				1747.5	20325	22.33	23					
				1717.5	20025	22.78	23					
			74	1732.5	20175	22.53	23					
				1747.5	20325	22.90	23					
	40.044			1717.5	20025	21.43	22					
	16-QAM		0	1732.5	20175	21.32	22					
				1747.5	20325	21.25	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1				
		00.55	40	1717.5	20025	21.37	22					
		36 RB	18	1732.5	20175	21.29	22	0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1				
				1747.5	20325	21.51	22					
			0.7	1717.5	20025	21.32	22					
			37	1732.5	20175	21.18	22					
				1747.5	20325	21.58	22					
		75	DD	1717.5	20025	21.38	22					
	75RE		מא	1732.5	20175	21.32	22					
				1747.5	20325	21.61	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

f (886-2) 2298-0488

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 23 of 328

	FDD Band 4											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1715	20000	23.23	24	0				
			0	1732.5	20175	23.36	24	0				
				1750	20350	23.48	24	0				
				1715	20000	23.30	24	0				
		1 RB	25	1732.5	20175	23.10	24	0				
				1750	20350	23.62	24	0				
				1715	20000	23.29	24	0				
			49	1732.5	20175	23.24	24	0				
				1750	20350	23.53	24	0				
				1715	20000	22.30	23	0-1				
	QPSK		0	1732.5	20175	22.33	23	0-1				
				1750	20350	22.51	23	0-1				
				1715	20000	22.33	23	0-1				
		25 RB	12	1732.5	20175	22.23	23	0-1				
				1750	20350	22.61	23	0-1				
				1715	20000	22.36	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1				
			25	1732.5	20175	22.20	23	0-1				
				1750	20350	22.64	23	0-1				
				1715	20000	22.32	23	0-1				
		50	RB	1732.5	20175	22.23	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-				
10				1750	20350	22.60	23	0-1				
10				1715	20000	22.27	23	0-1				
			0	1732.5	20175	22.82	23	0-1				
				1750	20350	22.45	23	0-1				
				1715	20000	22.82	23	0-1				
		1 RB	25	1732.5	20175	22.57	23	0-1				
				1750	20350	22.97	23	0-1				
				1715	20000	22.64	23	0-1				
			49	1732.5	20175	22.50	23	0-1				
				1750	20350	22.77	23					
				1715	20000	21.40	22	0-2				
	16-QAM		0	1732.5	20175	21.29	22					
				1750	20350	21.50	22	0-2				
				1715	20000	21.40	22	0-2				
		25 RB	12	1732.5	20175	21.30	22	0-2				
				1750	20350	21.59	22	0-2				
				1715	20000	21.46	22					
			25	1732.5	20175	21.21	22	0-2				
				1750	20350	21.60	22					
				1715	20000	21.42	22	0-2				
		50	RB	1732.5	20175	21.29	22	0-2				
				1750	20350	21.57	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 24 of 328

				FDD Band 4					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				1712.5	19975	23.20	24	0	
			0	1732.5	20175	23.24	24	0	
				1752.5	20375	23.61	24	0	
				1712.5	19975	23.30	24	0	
		1 RB	12	1732.5	20175	23.21	24	0	
				1752.5	20375	23.59	24	0	
				1712.5	19975	23.37	24	0	
			24	1732.5	20175	23.22	24	0	
				1752.5	20375	23.51	24	0	
				1712.5	19975	22.50	23	0-1	
	QPSK		0	1732.5	20175	22.55	23	0-1	
				1752.5	20375	22.85	23	0-1	
				1712.5	19975	22.58	23	0-1	
		12 RB	6	1732.5	20175	22.53	23	0-1	
				1752.5	20375	22.90	23	0-1	
				1712.5	19975	22.61	23	0-1	
			13	1732.5	20175	22.46	23	0-1	
				1752.5	20375	22.84	23	0-1	
			•	1712.5	19975	22.29	23	0-1	
		25	RB	1732.5	20175	22.23	23	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-	
5				1752.5	20375	22.61	23	0-1	
5				1712.5	19975	22.69	23	0-1	
			0	1732.5	20175	22.55	23	0-1	
				1752.5	20375	22.93	23	0-1	
				1712.5	19975	22.14	23	0-1	
		1 RB	12	1732.5	20175	22.58	23	0-1	
				1752.5	20375	22.47	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
				1712.5	19975	22.47	23	0-1	
			24	1732.5	20175	22.59	23	0-1	
				1752.5	20375	22.74	23	0-1	
				1712.5	19975	21.54	22	0-2	
	16-QAM		0	1732.5	20175	21.59	22		
				1752.5	20375	21.88	22	0-2	
				1712.5	19975	21.63	22	0-2	
		12 RB	6	1732.5	20175	21.59	22		
				1752.5	20375	21.82	22	0-2	
				1712.5	19975	21.60	22	0-2	
			13	1732.5	20175	21.50	22		
				1752.5	20375	21.71	22		
				1712.5	19975	21.29	22	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
	25RB		RB	1732.5 1752.5	20175	21.20	22	0-2	
					20375	21.57	22	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 25 of 328

				FDD Band 4						
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				1711.5	19965	23.02	24	0		
			0	1732.5	20175	23.22	24	0		
				1753.5	20385	23.46	24	0		
				1711.5	19965	23.16	24	0		
		1 RB	7	1732.5	20175	23.33	24	0		
				1753.5	20385	23.62	24	0		
				1711.5	19965	23.13	24	0		
			14	1732.5	20175	23.20	24	0		
				1753.5	20385	23.52	24	0		
				1711.5	19965	22.17	23	0-1		
	QPSK		0	1732.5	20175	22.25	23	0-1		
				1753.5	20385	22.57	23	0-1		
				1711.5	19965	22.15	23	0-1		
		8 RB	4	1732.5	20175	22.23	23	+ MPR Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
				1753.5	20385	22.52	23			
				1711.5	19965	22.26	23	0-1		
			7	1732.5	20175	22.21	23	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1		
				1753.5	20385	22.57	23	0-1		
				1711.5	19965	22.16	23	0-1		
		15	RB	1732.5	20175	22.24	23	0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1		
3				1753.5	20385	22.54	23	0-1		
				1711.5	19965	22.31	23	0-1		
			0	1732.5	20175	22.64	23	0-1		
				1753.5	20385	22.38	23			
				1711.5	19965	22.47	23			
		1 RB	7	1732.5	20175	22.70	23			
				1753.5	20385	22.97	23			
				1711.5	19965	22.07	23	_		
			14	1732.5	20175	22.43	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1		
				1753.5	20385	22.92	23			
	40.0414			1711.5	19965	21.27	22			
	16-QAM		0	1732.5	20175	21.33	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1		
				1753.5	20385	21.56	22			
		0.00	4	1711.5	19965	21.20	22			
		8 RB	4	1732.5	20175	21.05	22			
				1753.5	20385	21.55	22			
			_	1711.5	19965	21.25	22			
			7	1732.5	20175	21.31	22			
				1753.5	20385	21.48	22			
		4 5	DD	1711.5	19965	21.18	22			
	15R		מא	1732.5	20175	21.34	22			
				1753.5	20385	21.54	22	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_end_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this onlineful.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

prosecuted to the fullest extent of the law.



Page: 26 of 328

	FDD Band 4											
				, DD Dana 4			Torest					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1710.7	19957	23.23	24	0				
			0	1732.5	20175	23.25	24	0				
				1754.3	20393	23.51	24	0				
				1710.7	19957	23.19	24	0				
		1 RB	2	1732.5	20175	23.19	24	0				
				1754.3	20393	23.55	24	0				
				1710.7	19957	23.16	24	0				
			5	1732.5	20175	23.15	24	0				
				1754.3	20393	23.59	24	0				
				1710.7	19957	22.47	23	0				
	QPSK		0	1732.5	20175	22.52	23	0				
				1754.3	20393	22.83	23	0				
				1710.7	19957	22.48	23	+ MPR Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
		3 RB	2	1732.5	20175	22.53	23	0				
				1754.3	20393	22.83	23	Allowed per 3GPP(dB) O O O O O O O O O O O O O O O O O O				
				1710.7	19957	22.48	23					
			3	1732.5	20175	22.49	23					
				1754.3	20393	22.83	23	0				
				1710.7	19957	22.17	23	0-1				
		6F	RB	1732.5	20175	22.19	23	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
1.4				1754.3	20393	22.54	23	0-1				
17				1710.7	19957	21.98	23	0-1				
			0	1732.5	20175	22.64	23	0-1				
				1754.3	20393	22.43	23	0-1				
				1710.7	19957	22.16	23	0-1				
		1 RB	2	1732.5	20175	22.17	23	0-1				
				1754.3	20393	22.91	23	0-1				
				1710.7	19957	22.22	23	0-1				
			5	1732.5	20175	22.52	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				1754.3	20393	22.96	23	0-1				
				1710.7	19957	22.23	23	0-1				
	16-QAM		0	1732.5	20175	22.26	23					
				1754.3	20393	22.46	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				1710.7	19957	22.14	23	0-1				
		3 RB	2	1732.5	20175	22.32	23	0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-				
				1754.3	20393	22.61	23					
				1710.7	19957	22.11	23	0-1				
			3	1732.5	20175	22.28	23					
				1754.3	20393	22.75	23					
				1710.7	19957	21.14	22					
			RB	1732.5	20175	21.26	22					
				1754.3	20393	21.50	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 27 of 328

	FDD Band 5											
							Target Power +	MPR				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Max. Tolerance (dBm)	Allowed per 3GPP(dB)				
				829	20450	23.01	24	0				
			0	836.5	20525	23.07	24	0				
				844	20600	22.89	24	0				
				829	20450	23.08	24	0				
		1 RB	25	836.5	20525	22.77	24	0				
				844	20600	22.84	24	0				
				829	20450	22.96	24	0				
			49	836.5	20525	22.93	24	0				
				844	20600	23.10	24	0				
				829	20450	22.09	23	0-1				
	QPSK		0	836.5	20525	21.87	23	0-1				
				844	20600	21.69	23					
				829	20450	21.98	23					
		25 RB	12	836.5	20525	21.86	23					
				844	20600	21.79	23	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				829	20450	22.03	23					
			25	836.5	20525	21.81	23					
				844	20600	22.11	23	0-1				
				829	20450	22.14	23					
		50	RB	836.5	20525	21.88	23	0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1				
10			T.	844	20600	21.99	23					
			0	829	20450	22.57	23					
			0	836.5	20525	22.32	23					
				844	20600	22.13	23					
				829	20450	22.44	23					
		1 RB	25	836.5	20525	22.61	23					
				844	20600	22.49	23					
				829	20450	22.14	23					
			49	836.5	20525	22.33	23					
				844	20600	22.54	23					
	40.044		_	829	20450	21.25	22					
	16-QAM		0	836.5	20525	20.94	22					
				844	20600	20.90	22					
		05.00	40	829	20450	21.21	22	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
		25 RB	12	836.5	20525	21.04	22					
				844	20600	20.95	22					
			25	829	20450	21.22	22					
			25	836.5	20525	20.94	22					
				844	20600	21.13	22					
			DD	829	20450	21.17	22					
	50F		עט	836.5	20525	20.97	22					
				844	20600	21.11	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 28 of 328

				FDD Band 5				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				826.5	20425	23.00	24	0
			0	836.5	20525	22.82	24	0
				846.5	20625	22.73	24	0
				826.5	20425	22.96	24	0
		1 RB	12	836.5	20525	22.76	24	0
				846.5	20625	22.92	24	0
				826.5	20425	22.98	24	0
			24	836.5	20525	22.81	24	0
				846.5	20625	23.05	24	0
				826.5	20425	22.03	23	0-1
	QPSK		0	836.5	20525	21.80	23	0-1
				846.5	20625	21.72	23	0-1
				826.5	20425	22.03	23	0-1
		12 RB	6	836.5	20525	21.79	23	+ MPR Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
				846.5	20625	21.84	23	
				826.5	20425	21.98	23	
			13	836.5	20525	21.81	23	
				846.5	20625	21.89	23	0-1
				826.5	20425	22.01	23	0-1
		25	RB	836.5	20525	21.81	23	0-1
_				846.5	20625	22.00	23	0-1
5				826.5	20425	22.16	23	0-1
			0	836.5	20525	22.23	23	
				846.5	20625	22.36	23	0-1
				826.5	20425	22.04	23	0-1
		1 RB	12	836.5	20525	22.43	23	0-1
				846.5	20625	22.02	23	0-1
				826.5	20425	22.19	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-
			24	836.5	20525	22.47	23	0-1
				846.5	20625	21.77	23	0-1
				826.5	20425	21.08	22	0-2
	16-QAM		0	836.5	20525	20.84	22	0-2
				846.5	20625	20.92	22	0-2
				826.5	20425	21.11	22	0-2
		12 RB	6	836.5	20525	20.93	22	0-2
				846.5	20625	20.85	22	0-2
				826.5	20425	21.06	22	0-2
			13	836.5	20525	20.93	22	0-2
				846.5	20625	20.94	22	0-2
			-	826.5	20425	20.95	22	0-2
		25	25RB		20525	20.86	22	0-2
				846.5	20625	20.75	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 29 of 328

				FDD Band 5					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				825.5	20415	23.03	24	0	
			0	836.5	20525	22.71	24	0	
				847.5	20635	22.77	24	0	
				825.5	20415	23.00	24	0	
		1 RB	7	836.5	20525	22.79	24	0	
				847.5	20635	22.91	24	0	
				825.5	20415	22.99	24	0	
			14	836.5	20525	22.68	24	0	
				847.5	20635	22.94	24	0	
				825.5	20415	22.01	23	0-1	
	QPSK		0	836.5	20525	21.79	23	0-1	
				847.5	20635	21.92	23	0-1	
				825.5	20415	22.02	23	0-1	
		8 RB	4	836.5	20525	21.80	23	0-1	
				847.5	20635	21.97	23	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1	
				825.5	20415	22.05	23	0-1	
			7	836.5			23	0-1 0-1 0-1 0-1 0-1	
				847.5			23	0-1	
							23	0-1	
		15	RB	836.5			23	0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-	
				847.5	20635	22.03	23	0-1	
3				825.5	20415	22.32	23	0-1	
			0	7 836.5 20525 21.82 23 847.5 20635 21.97 23 825.5 20415 21.99 23 836.5 20525 21.79 23 847.5 20635 22.03 23 825.5 20415 22.32 23 0 836.5 20525 21.83 23 847.5 20635 22.38 23	0-1				
					20635		23	0-1	
				825.5	20415	22.04	23	0-1	
		1 RB	7	836.5	20525	22.61	23	0-1	
				847.5	20635	22.50	23	0-1	
				825.5	20415	22.72	23	0-1	
			14	836.5	20525	21.93	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
				847.5	20635	22.30	23	0-1	
				825.5	20415	20.96	22	0-2	
	16-QAM		0	836.5	20525	20.83	22	0-2	
				847.5	20635	20.89	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-	
				825.5	20415	20.99	22	0-2	
		8 RB	4	836.5	20525	20.82	22	0-2	
				847.5	20635	21.00	22	0-2	
				825.5	20415	21.07	22	0-2	
			7	836.5	20525	20.86	22	0-2	
				847.5	20635	21.11	22	0-2	
				825.5	20415	21.09	22	0-2	
		15	RB	836.5	20525	20.77	22	0-2	
				847.5	20635	21.02	22	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_end_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this onlineful.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

prosecuted to the fullest extent of the law.



Page: 30 of 328

	FDD Band 5											
				Frequency		Conducted	Target Power +	MPR				
BW(Mhz)	Modulation	RB Size	RB Offset	(MHz)	Channel	power (dBm)	Max. Tolerance (dBm)	Allowed per 3GPP(dB)				
				824.7	20407	23.04	24	0				
			0	836.5	20525	22.81	24	0				
				848.3	20643	22.99	24	0				
				824.7	20407	23.08	24	0				
		1 RB	2	836.5	20525	22.86	24	0				
				848.3	20643	22.92	24	0				
				824.7	20407	23.07	24	0				
			5	836.5	20525	22.81	24	0				
				848.3	20643	23.01	24	0				
				824.7	20407	22.94	23	0				
	QPSK		0	836.5	20525	22.82	23	0				
				848.3	20643	23.00	23	0				
				824.7	20407	22.97	23	0				
		3 RB	2	836.5	20525	22.79	23	0				
				848.3	20643	22.98	23	Allowed per 3GPP(dB) O O O O O O O O O O O O O O O O O O				
				824.7	20407	22.96	23					
			3	836.5	20525	22.82	23					
				848.3	20643	23.00	23	0				
				824.7	20407	22.06	23	0-1				
		6F	RB	836.5	20525	21.83	23	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
1.4				848.3	20643	22.03	23	0-1				
1				824.7	20407	22.57	23	0-1				
			0	836.5	20525	22.41	23	0-1				
				848.3	20643	22.27	23	0-1				
				824.7	20407	22.49	23	0-1				
		1 RB	2	836.5	20525	22.25	23	0-1				
				848.3	20643	22.33	23	0-1				
1				824.7	20407	22.44	23	0-1				
			5	836.5	20525	21.88	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				848.3	20643	22.49	23	0-1				
				824.7	20407	22.21	23	0-1				
	16-QAM		0	836.5	20525	21.90	23					
				848.3	20643	21.77	23	e Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				824.7	20407	22.08	23					
		3 RB	2	836.5	20525	22.05	23					
				848.3	20643	22.08	23					
				824.7	20407	22.22	23	0-1				
			3	836.5	20525	21.83	23					
				848.3	20643	22.14	23					
				824.7	20407	21.17	22					
			RB	836.5	20525	20.75	22					
				848.3	20643	20.98	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 31 of 328

	FDD Band 7											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				2510	20850	22.51	24	0				
			0	2535	21100	22.52	24	0				
				2560	21350	22.88	24	0				
				2510	20850	22.81	24	0				
		1 RB	50	2535	21100	22.62	24	0				
				2560	21350	22.72	24	0				
				2510	20850	22.70	24	0				
			99	2535	21100	23.07	24	0				
				2560	21350	22.91	24	0				
				2510	20850	21.74	23	0-1				
	QPSK		0	2535	21100	21.51	23	0-1				
				2560	21350	21.86	23	0-1				
				2510	20850	21.69	23	0-1				
		50 RB	25	2535	21100	21.58	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				2560	21350	21.83	23					
				2510	20850	21.65	23					
			50	2535	21100	21.78	23					
				2560	21350	21.81	23	0-1				
			•	2510	20850	21.71	23	0-1				
		100)RB	2535	21100	21.75	23	0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1				
20				2560	21350	21.89	23	0-1				
20			0	2510	20850	22.09	23	0-1				
				2535	21100	21.51	23	0-1				
				2560	21350	22.40	23	0-1				
				2510	20850	22.05	23	0-1				
		1 RB	50	2535	21100	22.18	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				2560	21350	22.34	23					
				2510	20850	22.12	23					
			99	2535	21100	22.34	23	0-1				
				2560	21350	22.12	23	0-1				
				2510	20850	20.85	22	0-2				
	16-QAM		0	2535	21100	20.58	22					
				2560	21350	20.91	22	0-2				
				2510	20850	20.80	22	0-2				
		50 RB	25	2535	21100	20.72	22	0-2				
				2560	21350	20.87	22	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1				
				2510	20850	20.64	22	0-2				
			50	2535	21100	20.83	22	0-2				
				2560	21350	20.85	22	0-2				
				2510	20850	20.83	22	0-2				
		100	ORB	2535	21100	20.90	22	0-2				
				2560	21350	20.93	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 32 of 328

				FDD Band 7				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				2507.5	20825	22.53	24	0
			0	2535	21100	22.59	24	0
				2562.5	21375	22.76	24	0
				2507.5	20825	22.76	24	0
		1 RB	36	2535	21100	22.57	24	0
				2562.5	21375	22.74	24	0
				2507.5	20825	22.64	24	0
			74	2535	21100	22.89	24	0
				2562.5	21375	22.88	24	0
				2507.5	20825	21.70	23	0-1
	QPSK		0	2535	21100	21.58	23	0-1
				2562.5	21375	21.83	23	0-1
		36 RB	18	2507.5	20825	21.72	23	0-1
				2535	21100	21.71	23	0-1
				2562.5	21375	21.80	23	0-1
			37	2507.5	20825	21.75	23	0-1
				2535	21100	21.75	23	0-1
				2562.5	21375	21.75	23	0-1
		75RB		2507.5	20825	21.74	23	0-1
				2535 2562.5	21100	21.68	23	0-1
15					21375	21.83	23	0-1
		0 1 RB 36	2507.5	20825	21.84	23	0-1	
			0	2535	21100	21.57	23	0-1
				2562.5	21375	22.50	23	0-1
			36	2507.5	20825	22.41	23	0-1
				2535	21100	22.11	23	0-1
				2562.5	21375	21.90	23	0-1
			7.4	2507.5	20825	21.92	23	0-1
			74	2535	21100	22.33	23	0-1
				2562.5	21375	22.06	23	0-1
	16 0 1 1		0	2507.5	20825	20.85	22	0-2
	16-QAM		0	2535	21100	20.69	22	0-2
				2562.5	21375	20.84	22	0-2
		26 DD	10	2507.5	20825	20.91	22	0-2
		36 RB	18	2535	21100	20.77	22	0-2
				2562.5	21375	20.87	22	0-2
			27	2507.5	20825	20.83	22	0-2
			37	2535	21100	20.82	22	0-2
1				2562.5	21375	20.83	22	0-2
		75RB		2507.5 2535	20825	20.87	22	0-2
				2535 2562.5	21100	20.78	22	0-2
				∠30∠.5	21375	20.89	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 33 of 328

FDD Band 7										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)		
				0505		22.72	(dBm)			
				2505	20800	22.72	24	0		
			0	2535	21100	22.39	24	0		
				2565	21400	22.84	24	0		
		4 DD	25	2505	20800	22.77	24	0		
		1 RB	25	2535	21100	22.63	24	0		
				2565	21400	22.82	24	0		
			40	2505 2535	20800	22.81	24	0		
			49		21100	22.77	24	0		
				2565	21400	22.98	24	0		
	QPSK		0	2505	20800	21.77	23	0-1		
	QFSK		ľ	2535	21100	21.67	23	0-1		
				2565	21400	21.86	23 23	0-1		
		25 RB	12	2505	20800	21.83		0-1		
				2535	21100	21.71	23	0-1		
			25	2565	21400	21.81	23 23	0-1		
				2505 2535	20800	21.84 21.72		0-1		
					21100		23 23	0-1		
				2565	21400	21.91		0-1		
		50RB		2505	20800	21.82	23	0-1		
				2535 2565	21100 21400	21.69 21.79	23 23	0-1 0-1		
10			1	2505	20800	22.20	23	0-1		
		1 RB 2	0	2535	21100	21.76	23	0-1		
				2565	21400	22.32	23	0-1		
			25	2505	20800	22.32	23	0-1		
				2535	21100	22.02	23	0-1		
				2565	21400	21.80	23	0-1		
				2505	20800	22.34	23	0-1		
			49	2535	21100	22.19	23	0-1		
			.~	2565	21400	22.19	23	0-1		
				2505	20800	20.83	22	0-1		
	16-QAM		0	2535	21100	20.76	22	0-2		
				2565	21400	21.02	22	0-2		
		25 RB		2505	20800	20.94	22	0-2		
	[12	2535	21100	20.88	22	0-2		
			· <u>-</u>	2565	21400	20.77	22	0-2		
				2505	20800	20.84	22	0-2		
			25	2535	21100	20.84	22	0-2		
				2565	21400	20.90	22	0-2		
				2505	20800	20.87	22	0-2		
		50	RB	2535	21100	20.87	22	0-2		
				2565	21400	20.90	22	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_end_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this onlineful.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

prosecuted to the fullest extent of the law.



Page: 34 of 328

				FDD Band 7				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				2502.5	20775	22.69	24	0
			0	2535	21100	22.61	24	0
				2567.5	21425	22.76	24	0
				2502.5	20775	22.74	24	0
		1 RB	12	2535	21100	22.68	24	0
				2567.5	21425	22.75	24	0
				2502.5	20775	22.78	24	0
			24	2535	21100	22.66	24	0
				2567.5	21425	22.86	24	0
				2502.5	20775	21.76	23	0-1
	QPSK		0	2535	21100	21.62	23	0-1
				2567.5	21425	21.81	23	0-1
				2502.5	20775	21.78	23	0-1
		12 RB	6	2535	21100	21.62	23	0-1
				2567.5	21425	21.80	23	0-1
			13	2502.5	20775	21.84	23	0-1
				2535	21100	21.65	23	0-1
				2567.5	21425	21.86	23	0-1
		25RB		2502.5	20775	21.82	23	0-1
				2535	21100	21.63	23	0-1
5				2567.5	21425	21.79	23	0-1
		1 RB	0	2502.5	20775	22.40	23	0-1
				2535	21100	21.92	23	0-1
				2567.5	21425	21.97	23	0-1
			12	2502.5	20775	22.18	23	0-1
				2535	21100	21.69	23	0-1
				2567.5	21425	21.91	23	0-1
			24	2502.5	20775	22.11	23	0-1
				2535	21100	22.43	23	0-1
				2567.5	21425	22.33	23	0-1
				2502.5	20775	20.87	22	0-2
	16-QAM		0	2535	21100	20.73	22	0-2
				2567.5	21425	20.92	22	0-2
				2502.5	20775	20.77	22	0-2
		12 RB	6	2535	21100	20.68	22	0-2
				2567.5	21425	20.86	22	0-2
		[,.	2502.5	20775	20.80	22	0-2
			13	2535	21100	20.68	22	0-2
				2567.5 2502.5	21425	20.95	22	0-2
			1		20775	20.79	22	0-2
		25RB		2535	21100	20.63	22	0-2
				2567.5	21425	20.84	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 35 of 328

FDD Band 12										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				704	23060	23.01	24	0		
			0	707.5	23095	23.13	24	0		
				711	23130	22.91	24	0		
				704	23060	22.97	24	0		
		1 RB	25	707.5	23095	22.84	24	0		
				711	23130	23.02	24	0		
				704	23060	22.95	24	0		
			49	707.5	23095	23.18	24	0		
				711	23130	22.99	24	0		
				704	23060	22.10	23	0-1		
	QPSK		0	707.5	23095	22.07	23	0-1		
				711	23130	21.85	23	0-1		
		25 RB		704	23060	21.98	23	0-1		
			12	707.5	23095	21.95	23	0-1		
				711	23130	22.00	23	0-1		
			25	704	23060	22.01	23	0-1		
				707.5	23095	21.92	23	0-1		
				711	23130	22.01	23	0-1		
		50RB		704	23060	22.11	23	0-1		
				707.5	23095	22.07	23	0-1		
10				711	23130	22.17	23	0-1		
		1 RB 25	0	704	23060	22.08	23	0-1		
				707.5	23095	22.54	23	0-1		
				711	23130	21.71	23	0-1		
			25	704	23060	22.01	23	0-1		
				707.5	23095	22.39	23	0-1		
				711	23130	22.50	23	0-1		
			40	704	23060	22.57	23	0-1		
			49	707.5	23095	22.66	23	0-1		
				711	23130	22.36	23	0-1		
	10.0014		_	704	23060	21.18	22	0-2		
	16-QAM		U	707.5	23095	21.28	22	0-2		
				711	23130	20.96	22	0-2		
		25 RB	40	704	23060	21.20	22	0-2		
			12	707.5	23095	21.20	22	0-2		
				711	23130	20.91	22	0-2		
			25	704	23060	21.10	22	0-2		
			25	707.5	23095	21.11	22	0-2		
				711 704	23130 23060	21.20 21.14	22 22	0-2 0-2		
		50RB					22	0-2		
				707.5 711	23095 23130	21.19		0-2		
			<u> </u>		23130	21.21	22	∪-∠		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 36 of 328

FDD Band 12										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				701.5	23035	22.97	24	0		
			0	707.5	23095	23.01	24	0		
				713.5	23155	22.90	24	0		
				701.5	23035	23.09	24	0		
		1 RB	12	707.5	23095	22.85	24	0		
				713.5	23155	22.98	24	0		
				701.5	23035	23.19	24	0		
			24	707.5	23095	22.91	24	0		
				713.5	23155	23.03	24	0		
				701.5	23035	22.16	23	0-1		
	QPSK		0	707.5	23095	21.95	23	0-1		
				713.5	23155	22.05	23	0-1		
				701.5	23035	22.07	23	0-1		
		12 RB	6	707.5	23095	21.91	23	0-1		
				713.5	23155	22.00	23	0-1		
			13	701.5	23035	22.12	23	0-1		
				707.5	23095	21.96	23	0-1		
				713.5	23155	22.18	23	0-1		
		25RB		701.5	23035	22.12	23	0-1		
				707.5	23095	21.97	23	0-1		
5				713.5	23155	21.94	23	0-1		
		1 RB	0	701.5	23035	22.53	23	0-1		
				707.5	23095	22.35	23	0-1		
				713.5	23155	22.20	23	0-1		
			12	701.5	23035	22.34	23	0-1		
				707.5	23095	22.46	23	0-1		
				713.5	23155	22.58	23	0-1		
			24	701.5	23035	22.16	23	0-1		
				707.5	23095	22.32	23	0-1		
				713.5	23155	22.44	23	0-1		
				701.5	23035	21.05	22	0-2		
	16-QAM		0	707.5	23095	20.96	22	0-2		
				713.5	23155	20.98	22	0-2		
				701.5	23035	21.15	22	0-2		
		12 RB	6	707.5	23095	20.97	22	0-2		
				713.5	23155	21.14	22	0-2		
				701.5	23035	21.14	22	0-2		
			13	707.5	23095	21.04	22	0-2		
				713.5 701.5	23155	20.88	22	0-2		
			<u> </u>		23035	20.98	22	0-2		
		25RB		707.5	23095	21.02	22	0-2		
				713.5	23155	20.95	22	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 37 of 328

				FDD Band 12							
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				700.5	23025	23.02	24	0			
			0	707.5	23095	23.00	24	0			
				714.5	23165	22.94	24	0			
				700.5	23025	23.08	24	0			
		1 RB	7	707.5	23095	22.96	24	0			
				714.5	23165	22.92	24	0			
				700.5	23025	23.16	24	0			
			14	707.5	23095	22.87	24	0			
				714.5	23165	22.86	24	0			
				700.5	23025	21.96	23	0-1			
	QPSK		0	707.5	23095	21.95	23	0-1			
				714.5	23165	22.00	23	0-1			
				700.5	23025	22.02	23				
		8 RB	4	707.5	23095	21.93	23				
				714.5	23165	21.75	23				
				700.5	23025	22.14	23	0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1			
			7	707.5	23095	21.97	23				
				714.5	23165	22.02	23	0-1			
				700.5	23025	22.16	23	0-1			
		15	RB	707.5	23095	21.93	23	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1			
3			ī	714.5	23165	21.96	23				
				700.5	23025	22.51	23				
			0	707.5	23095	22.30	23				
				714.5	23165	21.79	23				
				700.5	23025	22.33	23				
		1 RB	7	707.5	23095	22.16	23				
				714.5	23165	22.40	23				
			4.4	700.5	23025	21.98	23				
			14	707.5	23095	21.97	23				
				714.5	23165	22.54	23				
	16.0014		_	700.5	23025	21.00	22				
	16-QAM		0	707.5	23095	21.08	22				
				714.5	23165	21.07	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1			
		0 DD	4	700.5	23025	21.11	22				
		8 RB	4	707.5	23095	21.06	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-			
				714.5	23165	21.05	22				
			7	700.5	23025	21.14	22				
			'	707.5	23095	20.92	22				
				714.5 700.5	23165 23025	21.05 21.13	22 22				
		15	RR	700.5	23025	20.97	22				
	15RB		ועט	707.5	23095		22				
				7 14.5	23100	21.15	22	∪-∠			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 38 of 328

	FDD Band 12												
				Do Banu 12			T						
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)					
				699.7	23017	22.91	24	0					
			0	707.5	23095	22.90	24	0					
				715.3	23173	22.97	24	0					
				699.7	23017	22.86	24	0					
		1 RB	2	707.5	23095	22.91	24	0					
				715.3	23173	22.77	24	0					
				699.7	23017	23.00	24	0					
			5	707.5	23095	22.94	24	0					
				715.3	23173	22.87	24	0					
				699.7	23017	22.92	23	0					
	QPSK		0	707.5	23095	22.95	23	0					
				715.3	23173	22.96	23	0					
				699.7	23017	22.97	23	0					
		3 RB	2	707.5	23095	22.90	23	0					
				715.3	23173	22.79	23	0					
				699.7	23017	22.96	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0					
			3	707.5	23095	22.94	23						
				715.3	23173	22.92	23	0					
			•	699.7	23017	22.03	23	0-1					
		61	RB	707.5	23095	21.88	23	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0					
1.4				715.3	23173	21.86	23	0-1					
1.4				699.7	23017	22.54	23	0-1					
			0	707.5	23095	22.14	23	0-1					
				715.3	23173	21.89	23	0-1					
				699.7	23017	22.46	23	0-1					
		1 RB	2	707.5	23095	22.26	23	0-1					
				715.3	23173	22.32	23	0-1					
				699.7	23017	22.16	23	0-1					
			5	707.5	23095	21.83	23	Allowed per 3GPP(dB) O O O O O O O O O O O O O O O O O O					
				715.3	23173	22.16	23	0-1					
				699.7	23017	22.16	23	0-1					
	16-QAM		0	707.5	23095	21.92	23	0-1					
				715.3	23173	22.12	23	0-1					
				699.7	23017	22.12	23	0-1					
		3 RB	2	707.5	23095	22.03	23	0-1					
				715.3	23173	21.99	23	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0					
				699.7	23017	22.29	23	0-1					
			3	707.5	23095	21.93	23	0-1					
				715.3	23173	22.02	23	0-1					
				699.7	23017	21.02	22	0-2					
		61	RB	707.5	23095	20.99	22	0-2					
				715.3	23173	21.02	22	0-2					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 39 of 328

				FDD Band 13				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
			0	782	23230	23.01	24	0
		1 RB	25	782	23230	22.96	24	0
			49	782	23230	23.08	24	0
	QPSK		0	782	23230	22.07	23	0-1
		25 RB	12	782	23230	21.91	23	0-1
			25	782	23230	21.98	Max. Tolerance (dBm) Allowed per 3GPP(dB) 24 0 24 0 24 0 23 0-1 23 0-1 23 0-1 23 0-1 23 0-1 23 0-1 23 0-1 23 0-1 23 0-1 23 0-1 23 0-1 23 0-1 23 0-1 23 0-2	
10		50RB		782	23230	22.13	23	0-1
10			0	782	23230	22.20	23	0-1
		1 RB	25	782	23230	22.03	23	0-1
			49	782	23230	22.44	23	0-1
	16-QAM		0	782	23230	20.93	22	0-2
		25 RB	12	782	23230	21.03	22	0-2
			25	782	23230	21.06	22	0-2
	5		RB	782	23230	21.14	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_end_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this onlineful.

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 40 of 328

	FDD Band 13												
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)					
				779.5	23205	22.97	24	0					
			0	782	23230	22.86	24	0					
				784.5	23255	22.84	24	0					
				779.5	23205	22.94	24	0					
		1 RB	12	782	23230	22.78	24	0					
				784.5	23255	23.01	24	0					
				779.5	23205	22.83	24	0					
			24	782	23230	22.88	24	0					
				784.5	23255	22.97	24	0					
				779.5	23205	21.79	23	0-1					
	QPSK		0	782	23230	21.74	23	0-1					
				784.5	23255	21.72	23	0-1					
				779.5	23205	21.85	23	0-1					
		12 RB	6	782	23230	21.80	23	0-1					
				784.5	23255	21.94	23	0-1					
				779.5	23205	21.70	23	0-1 0-1 0-1 0-1 0-1					
			13	782	23230	21.84	23						
				784.5	23255	22.04	23	0-1					
				779.5	23205	21.89	23	0-1					
		25	RB	782	23230	21.92	23	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0					
F				784.5	23255	22.03	23	0-1					
5			0	779.5	23205	22.55	23	0-1					
				782	23230	22.05	23	0-1					
				784.5	23255	22.15	23	0-1					
				779.5	23205	22.14	23	0-1					
		1 RB	12	782	23230	22.12	23	0-1					
				784.5	23255	22.28	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0					
				779.5	23205	22.29	23	0-1					
			24	782	23230	22.50	23	0-1					
				784.5	23255	22.65	23	0-1					
				779.5	23205	20.87	22	0-2					
	16-QAM		0	782	23230	20.76	22	0-2					
				784.5	23255	20.82	22	0-2					
				779.5	23205	20.74	22	0-2					
		12 RB	6	782	23230	20.83	22	0-2					
				784.5	23255	21.11	22	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2					
				779.5	23205	20.74	22	0-2					
			13	782	23230	20.84	22	0-2					
				784.5	23255	21.17	22	0-2					
				779.5	23205	20.89	22	0-2					
		25	RB	782	23230	20.78	22	0-2					
				784.5	23255	21.07	22	0-2					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 41 of 328

				FDD Band 17					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				709	23780	22.91	24	0	
			0	710	23790	22.98	24	0	
				711	23800	23.03	24	0	
				709	23780	23.00	24	0	
		1 RB	25	710	23790	22.86	24	0	
				711	23800	22.99	24	0	
				709	23780	23.12	24	0	
			49	710	23790	23.04	24	0	
				711	23800	23.03	24	0	
				709	23780	21.97	23	0-1	
	QPSK		0	710	23790	21.94	23	0-1	
				711	23800	21.89	23	0-1	
				709	23780	21.88	23	0-1	
		25 RB	12	710	23790	22.00	23	0-1	
				711	23800	22.01	23	0-1	
				709	23780	22.09	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1	
			25	710	23790	22.03	23		
				711	23800	22.10	23	0-1	
				709	23780	21.96	23		
		50	RB	710	23790	22.17	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-	
10				711	23800	22.04	23	0-1	
10			0	709	23780	22.07	23	0-1	
				710	23790	22.35	23	0-1	
				711	23800	22.35	23	0-1	
				709	23780	22.23	23	0-1	
		1 RB	25	710	23790	22.14	23	0-1	
				711	23800	22.43	23	0-1	
				709	23780	22.81	23	0-1	
			49	710	23790	22.74	23		
				711	23800	22.51	23		
				709	23780	21.13	22		
	16-QAM		0	710	23790	21.11	22		
				711	23800	21.04	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-	
			, -	709	23780	20.99	22		
		25 RB	12	710	23790	21.04	22		
				711	23800	21.04	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-	
			0.5	709	23780	21.23	22		
			25	710	23790	21.17	22		
				711	23800	21.20	22		
			DD	709	23780	21.29	22		
		50	RB	710	23790	21.17	22		
				711	23800	21.28	22	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 42 of 328

				FDD Band 17						
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				706.5	23755	22.97	24	0		
			0	710	23790	22.86	24	0		
				713.5	23825	22.84	24	0		
				706.5	23755	22.96	24	0		
		1 RB	12	710	23790	22.80	24	0		
				713.5	23825	23.10	24	0		
				706.5	23755	22.96	24	0		
			24	710	23790	22.97	24	0		
				713.5	23825	23.02	24	0		
				706.5	23755	21.91	23	0-1		
	QPSK		0	710	23790	21.80	23	0-1		
				713.5	23825	21.92	23	0-1		
				706.5	23755	21.90	23	0-1		
		12 RB	6	710	23790	21.98	23	0-1		
				713.5	23825	21.99	23	0-1		
				706.5	23755	21.90	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1		
			13	710	23790	21.97	23	0-1		
				713.5	23825	21.89	23	0-1		
				706.5	23755	21.89	23	0-1		
		25	RB	710	23790	21.91	23	0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-		
5				713.5	23825	21.89	23	0-1		
				706.5	23755	22.54	23			
			0	710	23790	22.18	23	0-1		
				713.5	23825	22.34	23	0-1		
				706.5	23755	22.17	23			
		1 RB	12	710	23790	22.37	23			
				713.5	23825	22.73	23			
				706.5	23755	21.74	23			
			24	710	23790	22.42	23			
				713.5	23825	22.60	23			
	40.0444		_	706.5	23755	21.02	22			
	16-QAM		0	710	23790	20.85	22			
				713.5	23825	21.13	22			
		40.00	_	706.5	23755	20.87	22			
		12 RB	6	710	23790	21.01	22	0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-		
				713.5	23825	21.14	22			
			40	706.5	23755	21.01	22			
			13	710	23790	20.99	22			
				713.5	23825	21.00	22			
		25	DD	706.5	23755	20.99	22			
	25RE		KD	710	23790	20.88	22			
				713.5	23825	20.99	22	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 43 of 328

				FDD Band 26					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				822.5	26825	23.11	24	0	
			0	831.5	26865	22.95	24	0	
				841.5	26965	22.85	24	0	
				822.5	26825	23.06	24	0	
		1 RB	36	831.5	26865	23.01	24	0	
				841.5	26965	22.90	24	0	
				822.5	26825	22.76	24	0	
			74	831.5	26865	22.74	24	0	
				841.5	26965	22.94	24	0	
				822.5	26825	22.09	23	0-1	
	QPSK		0	831.5	26865	22.15	23	0-1	
				841.5	26965	21.83	23	0-1	
				822.5	26825	22.07	23	0-1	
		36 RB	18	831.5	26865	22.07	23	0-1	
				841.5	26965	21.76	23	0-1	
				822.5	26825	22.08	23	0-1	
			37	831.5	26865	21.87	23	0-1	
				841.5	26965	21.95	23	0-1	
				822.5	26825	22.20	23	0-1	
		75	RB	831.5	26865	22.18	23	0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1	
15				841.5	26965	22.09	23	0-1	
13				822.5	26825	22.27	23	0-1	
			0	831.5	26865	22.09	23	0-1	
				841.5	26965	22.29	23	0-1	
				822.5	26825	22.36	23	0-1	
		1 RB	36	831.5	26865	22.56	23	0-1	
				841.5	26965	22.29	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
				822.5		0-1			
			74	831.5	26865	22.63	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
				841.5	26965	22.36	23	0-1	
				822.5	26825	21.25	22	0-2	
	16-QAM		0	831.5	26865	21.20	22	0-2	
				841.5	26965	20.94	22	0-2	
				822.5	26825	21.12	22	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1	
		36 RB	18	831.5	26865	21.10	22		
				841.5			22		
				822.5	26825	21.23	22	0-2	
			37	831.5	26865		22	0-2	
				841.5	26965	21.02	22	0-2	
				822.5	26825		22		
		75RB		831.5	26865	21.27		0-2	
				841.5	26965	20.92	22	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 44 of 328

				FDD Band 26						
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				820	26750	23.16	24	0		
			0	831.5	26865	23.02	24	0		
				844	26990	22.84	24	0		
				820	26750	23.05	24	0		
		1 RB	25	831.5	26865	22.96	24	0		
				844	26990	22.80	24	0		
				820	26750	23.03	24	0		
			49	831.5	26865	22.88	24	0		
				844	26990	23.06	24	0		
				820	26750	22.06	23	0-1		
	QPSK		0	831.5	26865	21.96	23	0-1		
				844	26990	21.92	23	0-1		
				820	26750	22.16	23	0-1		
		25 RB	12	831.5	26865	22.09	23	0-1		
				844	26990	21.80	23	0-1		
				820	26750	22.09	23	0-1		
			25	831.5	26865	21.94	23	0-1		
				844	26990	22.13	23	0-1		
				820	26750	22.18	23			
		50	RB	831.5	26865	22.03	23	0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-		
10			1	844	26990	21.96	23			
			0	820	26750	22.40	23			
			0	831.5	26865	22.57	23			
				844	26990	22.05	23	_		
		. ==		820	26750	22.63	23			
		1 RB	25	831.5	26865	22.43	23	_		
				844	26990	22.04	23			
			40	820	26750	22.45	23			
			49	831.5	26865	22.48	23			
				844	26990	22.32	23			
	16 0 11		_	820	26750	21.31	22			
	16-QAM		U	831.5	26865	21.05	22			
				844	26990	20.93	22			
		25 DD	10	820	26750	21.28	22	0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-		
		25 RB	12	831.5	26865	21.16	22			
				844	26990	20.92	22			
			25	820	26750	21.17	22			
			20	831.5	26865	20.99	22			
				844 820	26990	21.10	22 22			
		50	RR	831.5	26750 26865	21.18 21.04	22			
			0 12 25 RB 0 25 49 0 12 25 RB	844	26990	21.04	22			
				044	20990	۷۱.۱۱	22	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 45 of 328

				FDD Band 26							
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				816.5	26715	23.04	24	0			
			0	831.5	26865	22.90	24	0			
				846.5	27015	22.66	24	0			
				816.5	26715	23.05	24	0			
		1 RB	12	831.5	26865	22.96	24	0			
				846.5	27015	22.83	24	0			
				816.5	26715	23.21	24	0			
			24	831.5	26865	22.88	24	0			
				846.5	27015	22.93	24	0			
				816.5	26715	22.02	23	0-1			
	QPSK		0	831.5	26865	22.05	23	0-1			
				846.5	27015	21.82	23	0-1			
				816.5	26715	22.13	23	0-1			
		12 RB	6	831.5	26865	21.94	23	0-1			
				846.5	27015	21.94	23	0-1			
				816.5	26715	22.20	23	0-1			
			13	831.5	26865	21.89	23	0-1			
				846.5	27015	21.86	23	0-1			
				816.5	26715	22.17	23	0-1			
		25	RB	831.5	26865	21.94	23	0-1			
5				846.5	27015	21.72	23	0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1			
				816.5	26715	22.68	23	0-1			
			0	831.5	26865	22.21	23	0-1			
				846.5	27015	21.90	23	0-1			
				816.5	26715	22.54	23	0-1			
		1 RB	12	831.5	26865	22.34	23	0-1			
				846.5	27015	22.04	23	0-1			
				816.5	26715	22.84	23	0-1			
			24	831.5	26865	22.08	23	0-1			
				846.5	27015	22.13	23	0-1			
				816.5	26715	21.18	22	0-2			
	16-QAM		0	831.5	26865	20.91	22	0-2			
				846.5	27015	20.79	22	0-2			
				816.5	26715	21.24	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
		12 RB	6	831.5	26865	21.02	22				
				846.5	27015	20.80	22	0-2			
				816.5	26715	21.25	22				
			13	831.5	26865	20.98	22				
				846.5	27015	20.82	22				
				816.5	26715	21.13	22				
		25	RB	831.5	26865	20.99	22				
				846.5	27015	20.91	22	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 46 of 328

				FDD Band 26						
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				815.5	26705	23.02	24	0		
			0	831.5	26865	22.88	24	0		
				847.5	27025	22.73	24	0		
				815.5	26705	23.08	24	0		
		1 RB	7	831.5	26865	22.94	24	0		
				847.5	27025	23.02	24	0		
				815.5	26705	23.02	24	0		
			14	831.5	26865	22.85	24	0		
				847.5	27025	22.96	24	0		
				815.5	26705	22.00	23	0-1		
	QPSK		0	831.5	26865	22.08	23	0-1		
				847.5	27025	21.81	23	0-1		
				815.5	26705	21.95	23	0-1		
		8 RB	4	831.5	26865	22.02	23	0-1		
				847.5	27025	21.87	23	0-1		
				815.5	26705	22.14	23	0 0 0 0 0 0-1 0-1 0-1 0-1 0-1		
			7	831.5	26865	21.93	23			
				847.5	27025	21.78	23	0-1		
				815.5	26705	22.05	23	0-1		
		15	RB	831.5	26865	21.94	23	0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1		
3				847.5	27025	21.91	23	0-1		
				815.5	26705	22.10	23	0-1		
			0	831.5	26865	22.52	23	0-1		
				847.5	27025	22.12	23	0-1		
				815.5	26705	21.80	23	0-1		
		1 RB	7	831.5	26865	22.56	23	0-1		
						21.95	23	0-1		
					815.5 26705 23.02 24 0 831.5 26865 22.88 24 0 847.5 27025 22.73 24 0 815.5 26705 23.08 24 0 831.5 26865 22.94 24 0 847.5 27025 23.02 24 0 815.5 26705 23.02 24 0 831.5 26865 22.85 24 0 847.5 27025 22.96 24 0 815.5 26705 22.00 23 0- 815.5 26705 22.00 23 0- 815.5 26705 22.00 23 0- 815.5 26705 22.08 23 0- 831.5 26865 22.02 23 0- 831.5 26865 22.02 23 0- 847.5 27025 21.87 23 0- <					
			14					Allowed per 3GPP(dB) O O O O O O O O O O O O O O O O O O		
	40.0									
	16-QAM		0							
						 				
		0.55								
		8 RB	4					0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
			_							
			7							
			DD					0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
			RB							
				847.5	27025	20.98	22	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 47 of 328

	FDD Band 26												
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency	Channel	Conducted	Target Power + Max.	MPR					
BVV (IVII12)	Modulation	ND Size	KB Oliset	(MHz)	Charmer	power (dBm)	Tolerance (dBm)	3GPP(dB)					
				814.7	26697	22.89	24	0					
			0	831.5	26865	22.94	24	0					
				848.3	27033	22.93	24	0					
			_	814.7	26697	22.91	24	0					
		1 RB	2	831.5	26865	22.90	24						
				848.3	27033	22.93	24						
			_	814.7	26697	23.05	24						
			5	831.5	26865	22.92	24						
				848.3	27033	22.93	24						
	OBOK		_	814.7	26697	22.93	23	_					
	QPSK		0	831.5	26865	22.96	23						
				848.3	27033	22.90	23						
		2 DD	2	814.7	26697	22.98	23						
		3 RB	2	831.5	26865	22.89	23	_					
				848.3	27033	22.96	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0					
			3	814.7	26697	22.96	23						
			3	831.5	26865	22.92	23						
				848.3	27033	22.89	23 23	_					
		61	RB	814.7	26697	22.05							
		OI	\D	831.5	26865	21.94	23 23	0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-					
1.4				848.3 814.7	27033 26697	21.88 22.26	23						
			0	831.5	26865	22.26	23						
				848.3	27033	22.10	23						
				814.7	26697	22.41	23						
		1 RB	2	831.5	26865	22.20	23						
		TRE	_	848.3	27033	22.36	23						
				814.7	26697	22.54	23						
			5	831.5	26865	22.50	23						
				848.3	27033	22.52	23						
				814.7	26697	22.17	23						
	16-QAM		0	831.5	26865	21.91	23						
				848.3	27033	21.83	23						
				814.7	26697	22.02	23	0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1					
		3 RB	2	831.5	26865	22.01	23						
				848.3	27033	22.02	23						
				814.7	26697	22.02	23	0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1					
			3	831.5	26865	22.14	23						
				848.3	27033	22.12	23						
				814.7	26697	20.98	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-					
		6F	RB	831.5	26865	21.01	22	0-2					
		O N		848.3	27033	20.94	22	0-2					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 48 of 328

				FDD Band 30				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
			0	2310	27710	23.44	24	0
		1 RB	25	2310	27710	23.26	24	0
			49	2310	27710	23.33	24	0
	QPSK		0	2310	27710	22.51	23	0-1
		25 RB	12	2310	27710	22.32	23	0-1
			25	2310	27710	22.38	23	0-1
10		50RB		2310	27710	22.31	23	0-1
10			0	2310	27710	22.50	23	0-1
		1 RB	25	2310	27710	22.58	23	0-1
			49	2310	27710	22.57	23	0-1
	16-QAM		0	2310	27710	21.62	22	0-2
		25 RB	12	2310	27710	21.31	22	0-2
			25	2310	27710	21.26	22	0-2
		50	RB	2310	27710	21.41	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 49 of 328

				FDD Band 30				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				2307.5	27685	23.24	24	0
			0	2310	27710	23.32	24	0
				2312.5	27735	23.26	24	0
				2307.5	27685	23.28	24	0
		1 RB	12	2310	27710	23.20	24	0
				2312.5	27735	23.31	24	0
				2307.5	27685	23.25	24	0
			24	2310	27710	23.18	24	0
				2312.5	27735	23.12	24	0
				2307.5	Channel (MHz) Channel (MHz) Channel (MHz) Conducted power (dBm) Conducted power (dBm)	0-1		
	QPSK		0	2310		23	0-1	
				2312.5	27735	22.31	23	0-1
				2307.5	27685	22.31	23	0-1
		12 RB	6	2310	27710	Conducted power (dBm) Power + Max. Tolerance (dBm) MPR Allowed per 3GPP(dB) 35 23.24 24 0 35 23.26 24 0 35 23.28 24 0 35 23.28 24 0 35 23.21 24 0 35 23.31 24 0 35 23.31 24 0 35 23.25 24 0 35 23.18 24 0 35 23.12 24 0 35 23.12 24 0 35 23.12 24 0 35 22.35 23 0-1 35 22.31 23 0-1 35 22.31 23 0-1 35 22.31 23 0-1 35 22.24 23 0-1 35 22.24 23 0-1 35 22.30 23 </td		
				2312.5	27735	22.20	23	0-1
				2307.5	27685	22.29	23	0-1
			13	2310	27710	22.30	23	0-1
				2312.5	27735	22.34	23	0-1
				2307.5	27685	22.46	23	0-1
		25	RB	2310	27710	22.21	23	0-1
5				2312.5	27735	22.17	23	0-1
3				2307.5	27685	22.55	23	0-1
			0	2310	27710	22.28	23	0-1
				2312.5	27735	22.40	23	0-1
				2307.5	Nataro Power (dBm) Nataro Natar	0-1		
		1 RB	12	2310	27710	22.37	23	0-1
				2312.5	27735	22.38	23	0-1
				2307.5	27685	22.37	23	0-1
			24	2310	27710	22.40	23	0-1
				2312.5	27735	22.21	23	0-1
				2307.5	27685	21.41	22	0-2
	16-QAM		0	2310	27710	21.35	22	0-2
				2312.5	27735	21.30	22	0-2
				2307.5	27685	21.47	22	0-2
		12 RB	6	2310	27710	21.21	22	0-2
				2312.5	27735		22	0-2
				2307.5		21.32	22	0-2
			13	2310	27710	21.34	22	0-2
				2312.5	27735	21.15	22	0-2
				2307.5	27685	21.35	22	0-2
		25	RB	2310	27710		22	0-2
				2312.5	27735	21.28	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 50 of 328

				FDD Band 38				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				2580	37850	23.09	24	0
			0	2595	38000	23.02	24	0
				2610	38150	23.02	24	0
				2580	37850	22.99	24	0
		1 RB	50	2595	38000	22.97	24	0
				2610	38150	23.02	24	0
				2580	37850	23.02	24	0
			99	2595	38000	Channel power (dBm) Max. Tolerance (dBm) Allow 3GP 37850 23.09 24 38000 23.02 24 38150 23.02 24 38000 22.99 24 38000 22.97 24 38150 23.02 24 38000 23.04 24 38150 23.09 24 37850 22.07 23 38000 21.99 23 38150 22.07 23 38000 21.98 23 38150 22.03 23 38150 22.08 23 38150 22.04 23 38150 22.04 23 38000 22.01 23 38150 22.04 23 38000 22.01 23 38150 22.11 23 38000 22.02 23 38150 22.14 23 38000	0	
				2610	38150	23.09	24	0
				2580	37850	22.07	23	0-1
	QPSK		0	2595 38000 21.99 2	23	0-1		
				2610	38150	22.07	23	0-1
				2580	37850	22.03	23	0-1
		50 RB	25	2595	38000	21.98	23	0-1
				2610	38150	22.08	23	0-1
				2580	37850	22.04	23	0-1
			50	2595	38000	22.01	23	0-1 0-1 0-1 0-1
				2610	38150	22.11	23	0-1
				2580	37850	22.03	23	0-1
		100)RB	2595	38000	22.00	23	0-1
20				2610	38150	22.14	23	0-1
20				2580	37850	22.02		0-1
			0	2595	38000	21.98	23	0-1
				B Offset (MHz) Channel Conducted power (dBm) Max. Tolerance (dBm) 2580 37850 23.09 24 2595 38000 23.02 24 2580 37850 22.99 24 2580 37850 22.99 24 2580 37850 22.99 24 2580 37850 23.02 24 2580 37850 23.02 24 2580 37850 23.02 24 2580 37850 23.02 24 2580 37850 23.02 24 2580 37850 23.02 24 2580 37850 23.02 24 2580 37850 23.02 24 2580 37850 23.09 24 2595 38000 21.99 23 2610 38150 22.07 23 2610 38150 22.07 23 2580 37850 22.07 23 2580 37850 22.07 23 2610 38150 22.07 23 2580 37850 22.07 23 2580 37850 22.07 23 2610 38150 22.07 23 2610 38150 22.08 23 2610 38150 22.08 23 2610 38150 22.04 23 2610 38150 22.11 23 2580 37850 22.01 23 2610 38150 22.11 23 2580 37850 22.00 23 2610 38150 22.14 23 2580 37850 22.00 23 2610 38150 22.14 23 2580 37850 22.00 23 2610 38150 22.14 23 2580 37850 22.00 23 2610 38150 22.14 23 2580 37850 22.02 23 2610 38150 22.14 23 2580 37850 22.02 23 2610 38150 22.14 23 2580 37850 22.02 23 2610 38150 22.14 23 2610 38150 22.14 23 2610 38150 22.14 23 2610 38150 22.14 23 2610 38150 22.14 23 2610 38150 22.14 23 2610 38150 22.14 23 2610 38150 22.14 23 2610 38150 22.16 23 2610 38150 22.16 23 2610 38150 22.16 23 2610 38150 22.16 23 2610 38150 22.16 23 2610 38150 22.16 23 2610 38150 22.16 23 2610 38150 22.16 23 2610 38150 22.16 23 2610 38150 22.16 23 2610 38150 22.16 23 2610 38150 22.16 23 2610 38150 22.16 23 2610 38150 22.16 23 2610 38150 22.16 23 2610 38150 22.17 22 2610 38150 22.194 23 2610 38150 22.193 23 2610 38150 22.102 22 2610 38150 22.114 22 2610 38150 22.194 22 2610 38150 22.194 22 2610 38150 22.194 22 2610 38150 22.199 22 2610 38150 22.199 22 2610 38150 20.998 22 2610 38150 21.194 22 2610 38150 21.194 22 2610 38150 21.194 22 2610 38150 21.194 22 2610 38150 21.194 22 2610 38150 21.194 22 2610 38150 21.194 22 2610 38150 21.194 22 2610 38150 21.194 22 2610 38150 21.194 22 2610 38150 21.194 22 2610 38150 21.194 22 2610 38150 21.194 22 2610 38150 21.194 22 2610 38150 21.194 22 2610 38150 21.194 22 2610 38150 21.194 22	0-1			
				2580	37850	21.93	23	0-1
		1 RB	50	2595				0-1
								0-1
								0-1
			99					0-1
								0-1
								0-2
	16-QAM		0					0-2
								0-2
		50 55						0-2
		50 RB	25					0-2
								0-2
			5 0					0-2
			50					0-2
								0-2
			NDD.					0-2
		100)RB					0-2
				2610	38150	21.18	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 51 of 328

				FDD Band 38					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				2577.5	37825	23.09	24	0	
			0	2595	38000	23.10	24	0	
				2612.5	38175	23.15	24	0	
				2577.5	37825	23.07	24	0	
		1 RB	36	2595	38000	23.06	24	0	
				2612.5	38175	23.12	24	0	
				2577.5	37825	23.03	24	0	
			74	2595	38000	Conducted power (dBm) Power + Max. Tolerance (dBm) MPR Allowed p 3GPP(dE dBm) 23.09 24 0 23.10 24 0 23.15 24 0 23.07 24 0 23.06 24 0 23.12 24 0	0		
				2612.5	38175	23.17	24	0	
				2577.5	37825	22.08	23	0-1	
	QPSK	SK	0	2595	38000	22.05	23	0-1	
				2612.5	38175	22.09	23	0-1	
				2577.5	37825	22.06	23	0-1	
		36 RB	18	2595	38000	Conducted power (dBm) Power + Max. Tolerance (dBm) MPR Allowed per 3GPP(dB) 23.09 24 0 23.10 24 0 23.15 24 0 23.06 24 0 23.07 24 0 23.08 24 0 23.07 24 0 23.07 24 0 23.07 24 0 23.07 24 0 23.07 24 0 23.07 24 0 23.07 24 0 23.07 24 0 22.08 23 0-1 22.09 23 0-1 22.09 23 0-1 22.09 23 0-1 22.01 23 0-1 22.02 23 0-1 22.02 23 0-1 22.03 23 0-1 22.09 23 0-1			
				2612.5	38175	22.13	23	0-1	
				2577.5	37825	22.01	23	0-1	
			37	2595	38000	22.02	23	0-1	
				2612.5	38175	22.15	23	0-1	
			•	2577.5	37825	22.02	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
		75	RB	2595	38000	22.03	23	0-1	
15				2612.5	38175	22.09	23	0-1	
15				2577.5	37825	22.00	23	0-1	
			0	2595	38000	21.94	23	0-1	
				2612.5	38175	22.01	23	0-1	
				2577.5	37825	21.98	23	0-1	
		1 RB	36	2595	38000	21.94	23	0-1	
				2612.5	38175	22.05	23	0-1	
				2577.5	37825	21.93	23	0-1	
			74	2595	38000	21.97	23	0-1	
				2612.5	38175	22.11	23	0-1	
				2577.5	37825	21.12	22	0-2	
	16-QAM		0	2595	38000	21.04	22	0-2	
				2612.5	38175	21.13	22	0-2	
				2577.5	37825	21.08	22	0-2	
		36 RB	18	2595	38000	21.07	22	0-2	
				2612.5	38175	21.15	22	0-2	
				2577.5	37825	21.06	22	0-2	
			37	2595	38000	21.06	22	0-2	
				2612.5	38175	21.18	22	0-2	
				2577.5	37825	21.04	22	0-2	
		75	RB	2595	38000	21.01	22	0-2	
				2612.5	38175	21.09	22	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 52 of 328

				FDD Band 38					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				2575	37800	23.07	24	0	
			0	2595	38000	23.06	24	0	
				2615	38200	23.16	24	0	
				2575	37800	23.01	24	0	
		1 RB	25	2595	38000	23.02	24	0	
				2615	38200	23.14	24	0	
				2575	37800	23.00	24	0	
			49	2595	38000	23.08	24	0	
				2615	38200	23.16	24	0	
				2575	37800	38200 23.16 24 0 37800 22.12 23 0- 38000 22.10 23 0- 38200 22.18 23 0- 37800 22.10 23 0- 38200 22.07 23 0- 38200 22.20 23 0- 37800 22.10 23 0- 38000 22.10 23 0- 38200 22.19 23 0- 38200 22.19 23 0-	0-1		
	QPSK		0	2595	38000	22.10	23	0-1	
				2615	38200	22.18	23	0-1	
				2575	37800		0-1		
		25 RB	12	2595	38000	22.07	23	0-1	
				2615	38200	22.20	23	0-1	
				2575	37800	22.10	23	0-1	
			25	2595	38000	22.09	23	0-1	
				2615	38200	22.19	23	0-1	
			•	2575	37800	22.07	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
		50	RB	2595	38000	22.02	23	0-1	
10				2615	38200	22.12	23	0-1	
10				2575	37800	22.05	23	0-1	
			0	2595	38000	21.98	23	0-1	
				2615	38200	22.09	23	0-1	
				2575	37800	22.01	23	0-1	
		1 RB	25	2595	38000	22.05 23 0- 21.98 23 0- 22.09 23 0- 22.01 23 0-	0-1		
				2615	38200	22.09	23	0-1	
				2575	37800	21.96	23	0-1	
			49	2595	38000	22.05	23	0-1	
				2615	38200	22.13	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
				2575	37800	21.15	22	0-2	
	16-QAM		0	2595	38000	21.18	22	0-2	
				2615	38200	21.24	22	0-2	
				2575	37800	21.12	22	0-2	
		25 RB	12	2595	38000	21.16	22	0-2	
				2615	38200	21.24	22	0-2	
				2575	37800	21.11	22	0-2	
			25	2595	38000	21.18	22	0-2	
				2615	38200	21.31	22	0-2	
				2575	37800	21.05	22	0-2	
		50	RB	2595	38000	21.06	22	0-2	
				2615	38200	21.10	22	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 53 of 328

				FDD Band 38					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				2572.5	37775	22.98	24	0	
			0	2595	38000	22.98	24	0	
				2617.5	38225	23.11	24	0	
				2572.5	37775	22.92	24	0	
		1 RB	12	2595	38000	22.96	24	0	
				2617.5	38225	23.09	24	0	
				2572.5	37775	22.94	24	0	
			24	2595	38000	22.99	24	0	
				2617.5	38225	23.13	24	0	
				2572.5	37775	22.06	23	0-1	
	QPSK		0	2595	38000	22.07	23	0-1	
				2617.5	38225	22.17	23	0-1	
				2572.5	37775	22.06	23	0-1	
		12 RB	6	2595	Channel Conducted power (dBm) Power + Max. Tolerance (dBm) MPR Allowed pe 3GPP(dB) 37775 22.98 24 0 38000 22.98 24 0 38225 23.11 24 0 38000 22.96 24 0 38225 23.09 24 0 38000 22.99 24 0 38000 22.99 24 0 38000 22.99 24 0 38000 22.99 24 0 38000 22.99 24 0 38225 23.13 24 0 38225 23.13 24 0 38225 22.17 23 0-1 38000 22.07 23 0-1 38225 22.17 23 0-1 38225 22.17 23 0-1 38000 22.06 23 0-1 38225 22.19 23 0-1	0-1			
				2617.5	38225	22.20	23	0-1	
				2572.5	37775	22.05	23	0-1	
			13	2595	38000	22.08	23	0-1 0-1 0-1	
				2617.5	38225	22.19	23	0-1	
				2572.5	37775	22.06	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
		25	RB	2595	38000	22.07	23	0-1	
5				2617.5	38225	22.19	23	0-1	
3				2572.5	37775	22.01	23	0-1	
			0	2595	38000	22.00	23	0-1	
				2617.5	38225	22.10	23	0-1	
				2572.5	37775	22.01	23	0-1	
		1 RB	12	2595	38000	21.96	23	0-1	
				2617.5	38225	22.11	23	0-1	
				2572.5	37775	21.97	23	0-1	
			24	2595	38000	22.02	23	0-1	
				2617.5	38225	22.12	23	0-1	
				2572.5	37775	21.11	22	0-2	
	16-QAM		0	2595	38000		22	0-2	
				2617.5	38225	21.13	22	0-2	
				2572.5	37775	21.08	22	0-2	
		12 RB	6	2595	38000	21.03		0-2	
				2617.5	38225	21.13	22	0-2	
				2572.5	37775	21.07	22	0-2	
			13	2595	38000	21.08	22	0-2	
				2617.5	38225	21.22	22	0-2	
				2572.5	37775	21.13	22	0-2	
	25R		RB	2595	38000	21.09	22	0-2	
				2617.5	38225	21.24	22	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 54 of 328

					TC	DD Band 41								
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)						
				2506	39750	22.84	24	0						
				2549.5	40185	23.25	24	0						
			0	2593	40620	23.00	24	0						
				2636.5	41055	23.39	24	0						
				2680	41490	22.77	24	0						
				2506	39750	22.78	24	0						
		1 RB	50	2549.5	40185	23.21	24	0						
		IKD	50	2593 2636.5	40620 41055	22.94 23.27	24 24	0						
				2680	41490	22.66	24	0						
				2506	39750	22.89	24	0						
				2549.5	40185	23.21	24	0						
			99	2593	40620	23.06	24	0						
				2636.5	41055	23.20	24	0						
				2680	41490	22.76	24	0						
				2506	39750	21.91	23	0-1						
				2549.5	40185	22.28	23	0-1						
	QPSK		0	2593	40620	21.98	23	0-1						
				2636.5	41055	22.35	23	0-1						
		50 RB	50 RB	50 RB	50 RB		2680	41490	21.75	23	0-1			
										2506 2549.5	39750 40185	21.88 22.25	23 23	0-1 0-1
						25	2593	40620	21.96	23	0-1			
						50 RB	50 RB	25	2636.5	41055	22.29	23	0-1	
								2680	41490	21.71	23	0-1		
								2506	39750	21.90	23	0-1		
							2549.5	40185	22.26	23	0-1			
			50	2593	40620	21.98	23	0-1						
				2636.5	41055	22.23	23	0-1						
				2680	41490	21.78	23	0-1						
				2506	39750	21.93	23	0-1						
				2549.5	40185	22.28	23	0-1 0-1 0-1						
		100	ORB	2593	40620	21.99	23							
				2636.5 2680	41055 41490	22.30 21.83	23 23	0-1 0-1						
20				2506	39750	21.85	23	0-1						
				2549.5	40185	22.21	23	0-1						
			0	2593	40620	21.93	23	0-1						
				2636.5	41055	22.38	23	0-1						
				2680	41490	21.74	23	0-1						
				2506	39750	21.77	23	0-1						
				2549.5	40185	22.19	23	0-1						
		1 RB	50	2593	40620	21.90	23	0-1						
				2636.5	41055	22.27	23	0-1						
				2680	41490	21.63	23	0-1						
				2506	39750	21.89	23	0-1						
			00	2549.5	40185	22.18	23	0-1						
			99	2593 2636.5	40620 41055	22.03 22.17	23 23	0-1 0-1						
				2680	41490	21.77	23	0-1						
			 	2506	39750	20.83	22	0-2						
				2549.5	40185	21.23	22	0-2						
	16-QAM		0	2593	40620	20.95	22	0-2						
				2636.5	41055	21.31	22	0-2						
				2680	41490	20.73	22	0-2						
				2506	39750	20.81	22	0-2						
				2549.5	40185	21.23	22	0-2						
		50 RB	25	2593	40620	20.95	22	0-2						
			I	2636.5	41055	21.24	22	0-2						
			<u> </u>	2680	41490	20.75	22	0-2						
			I	2506	39750	20.83	22	0-2						
			50	2549.5	40185 40620	21.21 20.97	22	0-2 0-2						
			30	2593 2636.5	40620 41055	20.97	22	0-2						
				2680	41055	20.81	22	0-2						
				2506	39750	20.92	22	0-2						
				2549.5	40185	21.26	22	0-2						
		100	ORB	2593	40620	20.97	22	0-2						
				2636.5	41055	21.27	22	0-2						
	ı			2680	41490	20.76	22	0-2						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents at www.sgs.com/terms_and_conditions for Electronic Pocuments at www.sgs.com/terms_and_conditions.htm and for electronic pocuments at www.sgs.com/terms_and_conditions.htm and for electronic pocuments at www.sgs.com/terms_and_conditions.htm and for electronic pocuments at www.sgs.com/terms_and_conditions.htm

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 55 of 328

					TD	D Band 41											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(d									
				2503.5	39725	22.89	24	0									
				2548.3	40173	23.26	24	0									
			0	2593	40620	23.01	24	0									
				2637.8	41068	23.33	24	0									
				2682.5	41515 39725	22.73	24 24	0									
				2503.5 2548.3	40173	22.84 23.27	24	0									
		1 RB	36	2593	40620	23.00	24	0									
				2637.8	41068	23.30	24	0									
				2682.5	41515	22.73	24	0									
				2503.5	39725	22.89	24	0									
				2548.3	40173	23.26	24	0									
			74	2593	40620	23.01	24	0									
				2637.8	41068	23.19	24	0									
				2682.5	41515	22.87	24	0									
				2503.5	39725	21.88	23	0-1									
	QPSK			2548.3	40173	22.28	23	0-1									
	Qron.		0	2593 2637.8	40620 41068	21.98 22.35	23 23	0-1 0-1									
				2637.8	41068	22.35	23	0-1									
		36 RB		2503.5	39725	21.70	23	0-1									
			36 RB	36 RB		2548.3	40173	22.28	23	0-1							
					36 RB	36 RB	18	2593	40620	22.00	23	0-1					
							3010	30 KD	30 KD	00 I/D			2637.8	41068	22.32	23	0-1
								2682.5	41515	21.74	23	0-1					
								2503.5	39725	21.90	23	0-1					
				2548.3	40173	22.26	23	0-1									
		37	2593	40620	21.99	23	0-1										
			2637.8	41068	22.24	23	0-1										
			2682.5	41515	21.80	23	0-1										
			2503.5	39725	21.84	23	0-1										
				2548.3	40173	22.23	23										
		75	RB	2593	40620	21.98	23	0-1 0-1									
				2637.8	41068	22.24	23										
15			1	2682.5 2503.5	41515 39725	21.77	23 23										
									2548.3	40173	21.82 22.17	23	0-1				
									0	2593	40620	21.87	23	0-1			
			0	0	2637.8	41068	22.28	23	0-1								
				2682.5	41515	21.61	23	0-1									
				2503.5	39725	21.77	23	0-1									
				2548.3	40173	22.18	23	0-1									
		1 RB	36	2593	40620	21.89	23	0-1									
				2637.8	41068	22.26	23	0-1									
				2682.5	41515	21.63	23	0-1									
				2503.5	39725	21.82	23	0-1									
				2548.3	40173	22.15	23	0-1									
			74	2593	40620	21.93	23	0-1									
				2637.8	41068	22.14	23	0-1									
				2682.5	41515	21.81	23	0-1									
				2503.5	39725	20.89	22	0-2									
	16-QAM		0	2548.3 2593	40173 40620	21.28 21.01	22 22	0-2 0-2									
	10-QAIVI		I	2637.8	41068	21.01	22	0-2									
				2682.5	41515	20.79	22	0-2									
				2503.5	39725	20.89	22	0-2									
				2548.3	40173	21.31	22	0-2									
		36 RB	18	2593	40620	21.01	22	0-2									
				2637.8	41068	21.36	22	0-2									
			L_	2682.5	41515	20.77	22	0-2									
				2503.5	39725	20.93	22	0-2									
				2548.3	40173	21.27	22	0-2									
			37	2593	40620	21.02	22	0-2									
				2637.8	41068	21.29	22	0-2									
				2682.5	41515	20.82	22	0-2									
				2503.5	39725	20.91	22	0-2									
				2548.3	40173	21.26	22	0-2									
		75	RB	2593	40620	20.98	22	0-2									
	ı	į į		2637.8	41068	21.31	22	0-2									

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 56 of 328

					TD	D Band 41								
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB						
				2501	39700	22.85	24	0						
				2547	40160	23.21	24	0						
			0	2593	40620	23.02	24	0						
				2639	41080	23.38	24	0						
				2685	41540	22.72	24 24	0						
				2501 2547	39700 40160	22.78 23.19	24	0						
		1 RB	25	2593	40620	22.93	24	0						
				2639	41080	23.32	24	0						
				2685	41540	22.72	24	0						
				2501 39700 22.82 24	0									
		2547 40160 23.20 24		0										
			49	2593	40620	22.94	24	0						
				2639	41080	23.14	24	0						
				2685 2501	41540 39700	22.83 21.90	24	0-1						
				2547	40160	22.29	23	0-1						
	QPSK		0	2593	40620	22.02	23	0-1						
				2639	41080	22.35	23	0-1						
				2685	41540	21.82	23	0-1						
		25 RB	25 RB		2501	39700	21.92	23	0-1					
				25 RB	25 RB	25 RB	25 RB		2547	40160	22.27	23	0-1	
	25 RB							25 RB	12	2593	40620	22.01	23	0-1
											2639	41080	22.34	23
								2685 2501	41540 39700	21.86 21.88	23 23	0-1 0-1		
					2547	40160	22.28	23	0-1					
			25	2593	40620	22.02	23	0-1						
				2639	41080	22.26	23	0-1						
				2685	41540	21.89	23	0-1						
				2501	39700	21.89	23	0-1						
				2547	40160	22.23	23	0-1						
		50RB		2593	40620	21.96	23	0-1						
				2639 2685	41080 41540	22.31 21.80	23 23	0-1 0-1						
10				2501	39700	21.85	23	0-1						
				2547	40160	22.19	23	0-1						
			0	2593	40620	21.93	23	0-1						
				2639	41080	22.32	23	0-1						
				2685	41540	21.69	23	0-1						
				2501	39700	21.82	23	0-1						
		4.00	05	2547	40160	22.17	23	0-1						
		1 RB	25	2593 2639	40620 41080	21.90 22.25	23 23	0-1 0-1						
				2685	41540	21.74	23	0-1						
				2501	39700	21.79	23	0-1						
				2547	40160	22.18	23	0-1						
			49	2593	40620	21.93	23	0-1						
				2639	41080	22.16	23	0-1						
				2685	41540	21.81	23	0-1						
				2501	39700	20.96	22	0-2						
	46.0444		_	2547	40160	21.33	22	0-2						
	16-QAM		0	2593	40620	21.07	22	0-2						
				2639 2685	41080	21.38 20.85	22	0-2						
				2501	39700	20.97	22	0-2						
				2547	40160	21.33	22	0-2						
		25 RB	12	2593	40620	21.05	22	0-2						
				2639	41080	21.38	22	0-2						
				2685	41540	20.89	22	0-2						
				2501	39700	20.95	22	0-2						
			25	2547	40160	21.33	22	0-2						
			25	2593	40620	21.12	22	0-2						
				2639 2685	41080 41540	21.34 20.92	22 22	0-2 0-2						
			<u> </u>	2501	39700	20.92	22	0-2						
				2547	40160	21.18	22	0-2						
		50	RB	2593	40620	21.01	22	0-2						
				2639	41080	21.26	22	0-2						
	l l			2685	41540	20.83	22	0-2						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 57 of 328

BW(Mhz)	Modulation	RB Size	RB Offset	TDD Band 41 Target Power + Max. App Allowed as CODE(4)																
			IND Oliset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dE												
				2498.5	39675	22.81	24	0												
			_	2547.8	40148	23.15	24	0												
			0	2593	40620	22.93	24	0												
		1 RB 25RB		2640.3	41093	23.29	24	0												
				2687.5 2498.5	41565 39675	22.77 22.66	24 24	0												
				2547.8	40148	23.13	24	0												
		1 RB	12	2593	40620	22.90	24	0												
				2640.3	41093	23.17	24	0												
				2687.5	41565	22.69	24	0												
				2498.5	39675	22.72	24	0												
		2547.8 40148	23.14	24	0															
			24	2593	40620	22.94	24	0												
				2640.3	41093	23.22	24	0												
				2687.5	41565	22.77 21.87	24 23	0 0-1												
				2498.5 2547.8	39675 40148	21.87	23	0-1												
	QPSK		0	2593	40620	22.03	23	0-1												
			_	2640.3	41093	22.34	23	0-1												
				2687.5	41565	21.85	23	0-1												
				2498.5	39675	21.83	23	0-1												
				2547.8	40148	22.21	23	0-1												
		12 RB	12 RB	12 RB	12 RB	12 RB	12 RB	12 RB	12 RB	12 RB	6	2593	40620	22.03	23	0-1				
										2640.3	41093	22.25	23	0-1						
									2687.5	41565	21.84	23	0-1							
								2498.5	39675	21.80	23	0-1								
					2547.8	40148	22.21	23	0-1											
			13	2593	40620	22.02	23	0-1												
				2640.3	41093	22.30	23	0-1												
			2687.5	41565	21.87	23 23	0-1 0-1													
			2498.5 2547.8	39675 40148	21.83 22.21	23	0-1													
	25	RB	2593	40620	22.04	23	0-1													
				2640.3	41093	22.22	23	0-1												
_				2687.5	41565	21.85	23	0-1												
5																2498.5	39675	21.80	23	0-1
												2547.8	40148	22.14	23	0-1				
			0	2593	40620	21.95	23	0-1												
				2640.3	41093	22.25	23	0-1												
				2687.5	41565	21.75	23	0-1												
				2498.5	39675	21.73	23	0-1												
		4 DD	12	2547.8	40148	22.16	23	0-1												
		IKD	12	2593	40620 41093	21.94 22.16	23 23	0-1 0-1												
				2640.3 2687.5	41565	21.75	23	0-1												
				2498.5	39675	21.78	23	0-1												
				2547.8	40148	22.15	23	0-1												
			24	2593	40620	21.96	23	0-1												
				2640.3	41093	22.20	23	0-1												
				2687.5	41565	21.84	23	0-1												
				2498.5	39675	20.82	22	0-2												
				2547.8	40148	21.21	22	0-2												
	16-QAM		0	2593	40620	21.00	22	0-2												
				2640.3	41093	21.28	22	0-2												
				2687.5	41565	20.80	22	0-2												
				2498.5	39675	20.80	22	0-2												
		12 DD		2547.8	40148	21.25	22	0-2												
		12 RB	6	2593 2640.3	40620 41093	20.99 21.20	22 22	0-2 0-2												
				2640.3 2687.5	41093	21.20	22	0-2												
				2498.5	39675	20.76	22	0-2												
				2547.8	40148	21.27	22	0-2												
			13	2593	40620	20.97	22	0-2												
				2640.3	41093	21.23	22	0-2												
				2687.5	41565	20.82	22	0-2												
				2498.5	39675	20.83	22	0-2												
				2547.8	40148	21.29	22	0-2												
	25RB			2593	40620	21.03	22	0-2												
							22	0-2												

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 58 of 328

				FDD Band 66						
				Danu 00			Tarret			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				1720	132072	23.25	24	0		
			0	1745	132322	23.22	24	0		
				1770	132572	23.49	24	0		
				1720	132072	22.93	24	0		
		1 RB	50	1745	132322	23.07	24	0		
				1770	132572	23.34	24	0		
				1720	132072	23.25	24	0		
			99	1745	132322	23.50	24	0		
				1770	132572	23.29	24	0		
				1720	132072	22.18	23	0-1		
	QPSK		0	1745	132322			0-1		
				1770	132572	22.35		0-1		
				1720	132072	32322 23.07 24 0 32572 23.34 24 0 32072 23.25 24 0 32322 23.50 24 0 32572 23.29 24 0 32072 22.18 23 0-1 32322 22.15 23 0-1 32572 22.35 23 0-1 32072 22.14 23 0-1 32322 22.15 23 0-1 32572 22.36 23 0-1 32072 22.19 23 0-1 32072 22.19 23 0-1 32572 22.38 23 0-1 32572 22.37 23 0-1 32072 22.36 23 0-1 32322 22.37 23 0-1 32572 22.36 23 0-1 32572 22.36 23 0-1 32572 22.36 23 0-1 32572 22.54 23 0-1 32072 22.54 23 0-1 32072 22.59 23 0-1				
		50 RB	25	1745	132322					
				1770	132572					
				1720	132072					
			50	1745	132322			0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1		
				1770	132572					
				1720	132072			0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1		
		10	ORB	1745	132322					
20		1		1770						
			0	1720	132072					
				1745	132322					
				1770						
				1720		(dBm) 32072 23.25 24 0 32322 23.29 24 0 32572 23.49 24 0 32072 22.93 24 0 32572 23.34 24 0 32572 23.34 24 0 32322 23.50 24 0 32572 23.29 24 0 32572 23.29 24 0 32322 22.18 23 0-1 32322 22.15 23 0-1 32322 22.15 23 0-1 32322 22.14 23 0-1 32322 22.14 23 0-1 32572 22.36 23 0-1 32322 22.19 23 0-1 32322 22.19 23 0-1 32322 22.37 23 0-1 32322 22.37 23 0-1 <t< td=""><td></td></t<>				
		1 RB	50	1745						
				1770	132572					
			00	1720		+				
			99	1745						
				1770						
	16 OAM		0	1720						
	16-QAM		0	1745						
				1770	132572					
		50 DD	25	1720						
		50 RB	25	1745	132322					
				1770						
			50	1720						
			30	1745 1770						
				1770 1720						
		100	ORB	1720						
		100								
				1770	1325/2	21.52	22	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 59 of 328

				FDD Band 66						
				. 55 Bana 00			Toract			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				1717.5	132047	23.14	24	0		
			0	1745	132322	23.27	24	0		
				1772.5	132597	23.21	24	0		
				1717.5	132047	23.20	24	0		
		1 RB	36	1745	132322	23.00	24	0		
				1772.5	132597	23.12	24	0		
				1717.5	132047	23.18	24	0		
			74	1745	132322	23.36	24	0		
				1772.5	132597	23.45	24	0		
				1717.5	132047	22.15	23	0-1		
	QPSK		0	1745	132322			0-1		
				1772.5	132597	22.29		0-1		
				1717.5	132047		0-1			
		36 RB	18	1745						
				1772.5	132597					
				1717.5	132047					
			37	1745	132322			0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1		
				1772.5	132597					
				1717.5	132047			0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1		
		75	RB	1745	132322					
15				1772.5	132597					
			0	1717.5	132047					
				1745	132322					
				1772.5						
		4 DD	20	1717.5		22047 23.20 24 0 22322 23.00 24 0 22597 23.12 24 0 22047 23.18 24 0 22322 23.36 24 0 22597 23.45 24 0 22047 22.15 23 0-1 22597 22.29 23 0-1 22597 22.29 23 0-1 22597 22.38 23 0-1 22597 22.38 23 0-1 22597 22.38 23 0-1 22597 22.38 23 0-1 22597 22.31 23 0-1 22597 22.31 23 0-1 22597 22.31 23 0-1 22597 22.31 23 0-1 22597 22.31 23 0-1 22597 22.44 23 0-1 22597 <t< td=""><td></td></t<>				
		1 RB	36	1745						
				1772.5						
			74	1717.5		+				
			74	1745 1772.5						
				1717.5						
	16-QAM		0	1717.5						
	10-QAIVI			1745						
				1717.5						
		36 RB	18	1717.5	132322					
		0010	, ,	1772.5	132597					
				1717.5	132047					
			37	1717.3	132322					
				1772.5	132597					
				1717.5	132047					
		75	RB	1745	132322	21.23	22	0-2		
			-	1772.5	132597	21.46	22	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 60 of 328

				FDD Band 66				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)
				1715	122022	22.22		0
			0					0
								_
		1 RB	25					
		TKB	23					
					Channel Conducted power (dBm) Conducted power (d			
			49					
			49					
	QPSK		0					
	Qi Sit				75 132622 22.13 23 15 132022 22.01 23			
		25 RB	12			+		
		25 11.5	12					
			25					
			23					
						1		
		50	RR			+		
			NB					
10								
			0					
					5 132622 23.20 24 0 5 132022 23.07 24 0 5 132322 23.13 24 0 5 132622 22.95 24 0 5 132022 22.92 24 0 5 132322 23.35 24 0 5 132622 21.98 23 0-1 5 132022 21.98 23 0-1 5 132322 21.97 23 0-1 5 132622 22.13 23 0-1 5 132022 22.01 23 0-1 5 132622 22.13 23 0-1 5 132622 22.18 23 0-1 5 132622 22.18 23 0-1 5 132622 22.18 23 0-1 5 132622 22.17 23 0-1 5			
		1 RB	25					
						1		
			49					
			, ,					
	16-QAM		0					
		25 RB	12					
			25					
		50	RB					0-2
		SUR		1775	132622	21.30	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 61 of 328

	FDD Band 66											
				Danu 00			Tarret					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1712.5	131997	22.91	24	0				
			0	1745	132322	22.98	24	0				
				1777.5	132647	23.36	24	0				
				1712.5	131997	23.24	24	0				
		1 RB	12	1745	132322	22.89	24	0				
				1777.5	132647	23.29	24	0				
				1712.5	131997	23.04	24	0				
			24	1745	132322	23.14	24	0				
				1777.5	132647	23.15	24	0				
				1712.5	131997	21.93	23	0-1				
	QPSK		0	1745	132322	21.88	23	0-1				
				1777.5	132647	22.15	23	0-1				
		12 RB		1712.5	131997	21.96	23	0-1				
			6	1745	132322	21.95	23	0-1				
				1777.5	132647	22.07	23	0-1				
				1712.5	131997	22.05	23	0-1				
			13	1745	132322	22.04	23	0-1				
				1777.5	132647	22.09	23	0-1				
				1712.5	131997	22.11	23	0-1				
		25	RB	1745	132322	22.07	23	0-1				
5				1777.5	132647	22.25	23	0-1				
Ü			0	1712.5	131997	22.71	23	0-1				
				1745	132322	21.77	23	0-1				
				1777.5	132647	22.93	23	0-1				
				1712.5	131997	22.61	23	0-1				
		1 RB	12	1745	132322	22.28	23	0-1				
				1777.5	132647	22.37	23	0-1				
				1712.5	131997	21.93	23	0-1				
			24	1745	132322	22.33	23	0-1				
				1777.5	132647	22.61	23	0-1				
				1712.5	131997	20.87	22	0-2				
	16-QAM		0	1745	132322	20.61	22	0-2				
				1777.5	132647	20.91	22	0-2				
				1712.5	131997	20.93	22	0-2				
		12 RB	6	1745	132322	20.89	22	0-2				
				1777.5	132647	20.85	22	0-2				
				1712.5	131997	20.94	22	0-2				
			13	1745	132322	21.00	22	0-2				
				1777.5	132647	21.08	22	0-2				
				1712.5	131997	20.96	22	0-2				
		25	RB	1745	132322	20.89	22	0-2				
				1777.5	132647	21.10	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 62 of 328

	FDD Band 66											
				Frequency		Conducted	Target Power +	MPR				
BW(Mhz)	Modulation	RB Size	RB Offset	(MHz)	Channel	power (dBm)	Max. Tolerance (dBm)	Allowed per 3GPP(dB)				
				1711.5	131987	22.81	24	0				
			0	1745	132322	22.78	24	0				
				1778.5	132657	22.85	24	0				
				1711.5	131987	22.84	24	0				
		1 RB	7	1745	132322	23.29	24	0				
				1778.5	132657	23.34	24	0				
				1711.5	131987	22.92	24	0				
			14	1745	132322	23.24	24	0				
				1778.5	132657	23.45	24	0				
		QPSK 8 RB	0	1711.5	131987	21.75	23	0-1				
	QPSK			1745	132322	22.12	23	0-1				
				1778.5	132657	22.16	23	0-1				
				1711.5	131987	21.80	23	0-1				
			4	1745	132322	21.80	23	0-1				
				1778.5	132657	22.12	23	0-1				
			_	1711.5	131987	21.86	23	0-1				
			7	1745	132322	22.00	23	0-1				
				1778.5	132657	22.07	23	0-1				
		4.5	D.D.	1711.5	131987	22.03	23	0-1				
		15RB		1745	132322	22.01	23	0-1				
3				1778.5	132657	22.32	23	0-1				
			0	1711.5	131987	22.41	23	0-1				
				1745	132322	22.38	23	0-1				
				1778.5 1711.5	132657	22.95 21.47	23	0-1				
		1 RB	12	1711.5	131987 132322	22.31	23 23	0-1 0-1				
		TKB	12	1778.5	132657	22.59	23	0-1				
				1776.5	131987	22.39	23	0-1				
			24	1711.5	132322	22.41	23	0-1				
			24	1778.5	132657	22.92	23	0-1				
				1711.5	131987	20.78	22	0-2				
	16-QAM		0	1745	132322	20.79	22	0-2				
				1778.5	132657	20.73	22	0-2				
				1711.5	131987	20.42	22	0-2				
		12 RB	6	1745	132322	20.69	22	0-2				
		· · •		1778.5	132657	21.14	22	0-2				
				1711.5	131987	20.99	22	0-2				
			13	1745	132322	20.97	22	0-2				
	25RE			1778.5	132657	21.13	22	0-2				
				1711.5	131987	20.86	22	0-2				
		RB	1745	132322	20.97	22	0-2					
				1778.5	132657	21.17	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 63 of 328

				FDD Band 66				
			l	. 55 Bana 00			Torget	
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1710.7	131979	23.02	24	0
			0	1745	132322	23.30	24	0
				1779.3	132665	23.21	24	0
				1710.7	131979	23.04	24	0
		1 RB	2	1745	132322	23.29	24	0
				1779.3	132665	23.60	24	0
				1710.7	131979	23.18	24	0
			5	1745	132322	23.27	24	0
				1779.3	132665	22.90	24	0
				1710.7	131979	22.94	23	0
	QPSK		0	1745	132322	22.75	23	0
				1779.3	132665	22.98	23	0
		3 RB		1710.7	131979	22.88	23	0
			2	1745	132322	22.61	23	0
				1779.3	132665	22.91	23	0
				1710.7	131979	22.52	23	0
			3	1745	132322	22.94	23	0
				1779.3	132665	22.99	23	0
				1710.7	131979	22.07	23	0-1
		6F	RB	1745	132322	22.03	23	0-1
1.4				1779.3	132665	22.23	23	0-1
			0	1710.7	131979	22.65	23	0-1
				1745	132322	22.39	23	0-1
				1779.3	132665	22.89	23	0-1
				1710.7	131979	22.41	23	0-1
		1 RB	2	1745	132322	21.83	23	0-1
				1779.3	132665	22.70	23	0-1
				1710.7	131979	22.82	23	0-1
			5	1745	132322	22.18	23	0-1
				1779.3	132665	22.66	23	0-1
				1710.7	131979	21.82	23	0-1
	16-QAM		0	1745	132322	22.08	23	0-1
				1779.3	132665	22.06	23	0-1
				1710.7	131979	22.10	23	0-1
		3 RB	2	1745	132322	22.33	23	0-1
				1779.3	132665	22.24	23	0-1
				1710.7	131979	21.97	23	0-1
			3	1745	132322	22.20	23	0-1
				1779.3	132665	22.37	23	0-1
		. =		1710.7	131979	20.82	22	0-2
		6F	RB	1745	132322	20.91	22	0-2
				1779.3	132665	21.03	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 64 of 328

LTE FDD Band 2 / Band 4 / Band 5 / Band7 / Band 12 / Band 13 / Band 17 / Band 26 / Band 30 / Band 38 / Band 41 / Band 66 power table (Reduced power):

∠o / Bar	10 30 / E	sana 38	/ Band 4	41 / Band	a oo po	wer table	Reduc	ea powe
			•	FDD Band 2				·
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1860	18700	16.96	17	0
			0	1880	18900	16.52	17	0
				1900	19100	16.33	17	0
				1860	18700	16.52	17	0
		1 RB	50	1880	18900	16.45	17	0
				1900	19100	16.12	17	0
				1860	18700	16.55	17	0
			99	1880	18900	16.46	17	0
				1900	19100	16.42	17	0
	QPSK			1860	18700	16.68	17	0
			0	1880	18900	16.57	17	0
				1900	19100	16.21	17	0
		50 RB		1860	18700	16.44	17	0
			25	1880	18900	16.53	17	0
				1900	19100	16.12	17	0
				1860	18700	16.50	17	0
			50	1880	18900	16.54	17	0
				1900	19100	16.35	17	0
				1860	18700	16.66	17	0
		100)RB	1880	18900	16.66	17	0
20				1900	19100	16.42	17	0
20				1860	18700	16.92	17	0
			0	1880	18900	16.64	17	0
				1900	19100	16.68	17	0
				1860	18700	16.65	17	0
		1 RB	50	1880	18900	16.72	17	0
				1900	19100	16.55	17	0
				1860	18700	16.85	17	0
			99	1880	18900	16.93	17	0
				1900	19100	16.63	17	0
				1860	18700	16.72	17	0
	16-QAM		0	1880	18900	16.62	17	0
				1900	19100	16.30	17	0
				1860	18700	16.59	17	0
		50 RB	25	1880	18900	16.58	17	0
				1900	19100	16.27	17	0
				1860	18700	16.50	17	0
			50	1880	18900	16.59	17	0
				1900	19100	16.37	17	0
				1860	18700	16.67	17	0
		100RB		1880	18900	16.68	17	0
				1900	19100	16.35	17	0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 65 of 328

				FDD Band 2				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1857.5	18675	16.66	17	0
			0	1880	18900	16.49	17	0
				1902.5	19125	16.17	17	0
				1857.5	18675	16.55	17	0
		1 RB	36	1880	18900	16.59	17	0
				1902.5	19125	16.14	17	0
				1857.5	18675	16.38	17	0
			74	1880	18900	16.51	17	0
				1902.5	19125	16.39	17	0
				1857.5	18675	16.70	17	0
	QPSK	<	0	1880	18900	16.58	17	0
				1902.5	19125	16.13	17	0
				1857.5	18675	16.66	17	0
		36 RB	18	1880	18900	16.60	17	0
				1902.5	19125	16.19	17	0
				1857.5	18675	16.49	17	0
			37	1880	18900	16.52	17	0
				1902.5	19125	16.32	17	0
				1857.5	18675	16.73	17	0
		75	RB	1880	18900	16.58	17	0
15				1902.5	19125	16.32	17	0
			0	1857.5	18675	16.94	17	0
				1880	18900	16.95	17	0
				1902.5	19125	16.50	17	0
				1857.5	18675	16.72	17	0
		1 RB	36	1880	18900	16.82	17	0
				1902.5	19125	16.63	17	0
				1857.5	18675	16.89	17	0
			74	1880	18900	16.90	17	0
				1902.5	19125	16.60	17	0
	40.0		_	1857.5	18675	16.78	17	0
	16-QAM		0	1880	18900	16.65	17	0
				1902.5	19125	16.20	17	0
		00.55	4.5	1857.5	18675	16.71	17	0
		36 RB	18	1880	18900	16.74	17	0
				1902.5	19125	16.31	17	0
			07	1857.5	18675	16.55	17	0
			37	1880	18900	16.59	17	0
				1902.5	19125	16.43	17	0
		 -	DD	1857.5	18675	16.71	17	0
		75R	KR	1880	18900	16.61	17	0
				1902.5	19125	16.39	17	0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 66 of 328

				FDD Band 2				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1855	18650	16.95	17	0
			0	1880	18900	16.63	17	0
				1905	19150	16.55	17	0
				1855	18650	16.75	17	0
		1 RB	25	1880	18900	16.45	17	0
				1905	19150	16.18	17	0
				1855	18650	16.56	17	0
			49	1880	18900	16.53	17	0
				1905	19150	16.43	17	0
			0	1855	18650	16.77	17	0
	QPSK			1880	18900	16.64	17	0
				1905	19150	16.14	17	0
				1855	18650	16.68	17	0
		25 RB	12	1880	18900	16.58	17	0
				1905	19150	16.21	17	0
				1855	18650	16.70	17	0
			25	1880	18900	16.51	17	0
				1905	19150	16.42	17	0
				1855	18650	16.66	17	0
		50	RB	1880	18900	16.55	17	0
10		1		1905	19150	16.30	17	0
			0	1855	18650	16.91	17	0
				1880	18900	16.95	17	0
				1905	19150	16.16	17	0
				1855	18650	16.87	17	0
		1 RB	25	1880	18900	16.87	17	0
				1905	19150	16.36	17	0
			4-5	1855	18650	16.80	17	0
			49	1880	18900	16.71	17	0
				1905	19150	16.80	17	0
	16.0014		_	1855	18650	16.84	17	0
	16-QAM		0	1880	18900	16.72	17	0
				1905	19150	16.19	17	0
		0E DD	40	1855	18650	16.75	17	0
		25 RB	12	1880	18900	16.60	17	0
				1905	19150	16.27	17	0
			25	1855	18650	16.74	17	0
			25	1880	18900	16.59	17	0
				1905	19150	16.42	17	0
		5000		1855	18650	16.73	17	0
		50RE	מא	1880	18900	16.57	17	0
				1905	19150	16.35	17	0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 67 of 328

				FDD Band 2				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1852.5	18625	16.70	17	0
			0	1880	18900	16.53	17	0
				1907.5	19175	16.28	17	0
				1852.5	18625	16.70	17	0
		1 RB	12	1880	18900	16.50	17	0
				1907.5	19175	16.30	17	0
				1852.5	18625	16.58	17	0
			24	1880	18900	16.42	17	0
				1907.5	19175	16.46	17	0
				1852.5	18625	16.69	17	0
	QPSK		0	1880	18900	16.52	17	0
				1907.5	19175	16.23	17	0
		12 RB		1852.5	18625	16.66	17	0
			6	1880	18900	16.51	17	0
				1907.5	19175	16.41	17	0
				1852.5	18625	16.63	17	0
			13	1880	18900	16.51	17	0
				1907.5	19175	16.31	17	0
				1852.5	18625	16.67	17	0
		25	RB	1880	18900	16.49	17	0
5				1907.5	19175	16.28	17	0
			0	1852.5	18625	16.94	17	0
				1880	18900	16.90	17	0
				1907.5	19175	16.50	17	0
				1852.5	18625	16.91	17	0
		1 RB	12	1880	18900	16.72	17	0
				1907.5	19175	16.48	17	0
				1852.5	18625	16.64	17	0
			24	1880	18900	16.59	17	0
				1907.5	19175	16.52	17	0
			_	1852.5	18625	16.74	17	0
	16-QAM		0	1880	18900	16.65	17	0
				1907.5	19175	16.27	17	0
		40.55		1852.5	18625	16.76	17	0
		12 RB	6	1880	18900	16.59	17	0
				1907.5	19175	16.22	17	0
			40	1852.5	18625	16.73	17	0
			13	1880	18900	16.52	17	0
				1907.5	19175	16.43	17	0
			DD	1852.5	18625	16.74	17	0
		25	RB	1880	18900	16.49	17	0
				1907.5	19175	16.33	17	0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 68 of 328

				FDD Band 2				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1851.5	18615	16.79	17	0
			0	1880	18900	16.39	17	0
				1908.5	19185	16.16	17	0
				1851.5	18615	16.55	17	0
		1 RB	7	1880	18900	16.57	17	0
				1908.5	19185	16.39	17	0
				1851.5	18615	16.72	17	0
			14	1880	18900	16.52	17	0
				1908.5	19185	16.27	17	0
				1851.5	18615	16.67	17	0
	QPSK		0	1880	18900	16.52	17	0
		8 RB		1908.5	19185	16.41	17	0
				1851.5	18615	16.68	17	0
			4	1880	18900	16.50	17	0
				1908.5	19185	16.32	17	0
				1851.5	18615	16.67	17	0
			7	1880	18900	16.52	17	0
				1908.5	19185	16.37	17	0
				1851.5	18615	16.70	17	0
		15	RB	1880	18900	16.49	17	0
3				1908.5	19185	16.44	17	0
			0	1851.5	18615	16.95	17	0
				1880	18900	16.50	17	0
				1908.5	19185	16.38	17	0
				1851.5	18615	16.68	17	0
		1 RB	7	1880	18900	16.72	17	0
				1908.5	19185	16.23	17	0
				1851.5	18615	16.82	17	0
			14	1880	18900	16.93	17	0
				1908.5	19185	16.57	17	0
	40.0444			1851.5	18615	16.67	17	0
	16-QAM		0	1880	18900	16.57	17	0
				1908.5	19185	16.45	17	0
		0.00	_	1851.5	18615	16.80	17	0
		8 RB	4	1880	18900	16.58	17	0
				1908.5	19185	16.46	17	0
			7	1851.5	18615	16.74	17	0
			7	1880	18900	16.46	17	0
				1908.5	19185	16.40	17	0
		1555		1851.5	18615	16.66	17	0
		15RB	KD	1880	18900	16.52	17	0
				1908.5	19185	16.41	17	0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 69 of 328

BW(Mhz) Modulation RB Size RB Offset Frequency (MHz) Channel Conducted power (dBm) Power Max Tolerance (dBm) MPR A Rllowed per (dBm) MPR MPR MIN Tolerance (dBm) MPR MIN Tolerance MPR M					FDD Band 2											
BW(Mhz) Modulation RB Size RB Offset Frequency (MHz) Channel Conducted power (dBm) Power (dBm) Max Channel (dBm) Channel (dBm) Max Channel (dBm) C					1 DD Danu Z			Torest								
0 1880 18900 16.54 17 0 1990.3 19193 16.31 17 0 1850.7 18607 16.67 17 0 1990.3 19193 16.36 17 0 1990.3 19193 16.36 17 0 1990.3 19193 16.36 17 0 1880 18900 16.51 17 0 1880 18900 16.51 17 0 1880 18900 16.51 17 0 1880 18900 16.56 17 0 1880 18900 16.56 17 0 1880 18900 16.56 17 0 1880 18900 16.56 17 0 1880 18900 16.56 17 0 1880 18900 16.53 17 0 1880 18900 16.53 17 0 1880 18900 16.53 17 0 1880 18900 16.53 17 0 1880 18900 16.53 17 0 1880 18900 16.53 17 0 1880 18900 16.53 17 0 1880 18900 16.53 17 0 1880 18900 16.53 17 0 1880 18900 16.53 17 0 1880 18900 16.53 17 0 1880 18900 16.53 17 0 1880 18900 16.53 17 0 1880 18900 16.53 17 0 1880 18900 16.91 17 0 1990.3 19193 16.39 17 0 1880 18900 16.91 17 0 1990.3 19193 16.59 17 0 1880 18900 16.92 17 0 1880 18900 16.66 17 0 1880 18900 16.66 17 0 1880 18900 16.66 17 0 1880 18900 16.66 17 0 1880 18900 16.49 17 0 1880 18900 16.49 17 0 1880 18900 16.57 17 0 1880 18900 16.67 17 0 1880 18900 16.67 17 0 1880 18900 16.67 17 0 1880 18900 16.67 17 0 1880 18900 16.67 17 0 1880 18900 16.75 17 0 1880 18900 16.75 17 0 1880 18900 16.75 17 0 1880 18900 16.59 17 0 1880 18900 16.59 17 0 1880 18900 16.59 17 0 1880 18900 16.59 17 0 1880 18900 16.59 17 0 1880 18900 16.59 17 0 1880 18900 16.59 17 0 1880 18900 16.59 17 0 1880 18900 16.59 17 0 1880 18900 16.59 17 0 1880 18900 16.59 17 0 1880 18900 16.59 17 0 1880 18900 16.59 17 0 1880 18900 16.59 17 0 1880 18900 16.59 17 0 1880 18900	BW(Mhz)	Modulation	RB Size	RB Offset		Channel		Power + Max. Tolerance	Allowed per							
1 RB 2 1880 1890 16.57 17 0 1 RB 2 1880 1890 16.57 17 0 1 850.7 18607 16.60 17 0 1 850.7 18607 16.60 17 0 1 850.7 18607 16.60 17 0 1 850.7 18607 16.60 17 0 1 880 1890 16.51 17 0 1 850.7 18607 16.60 17 0 1 850.7 18607 16.66 17 0 1 850.7 18607 16.66 17 0 1 850.7 18607 16.66 17 0 1 850.7 18607 16.66 17 0 1 850.7 18607 16.68 17 0 1 850.7 18607 16.68 17 0 1 850.7 18607 16.69 17 0 1 850.7 18607 16.69 17 0 1 850.7 18607 16.69 17 0 1 850.7 18607 16.69 17 0 1 850.7 18607 16.69 17 0 1 850.7 18607 16.69 17 0 1 850.7 18607 16.69 17 0 1 850.7 18607 16.69 17 0 1 850.7 18607 16.69 17 0 1 850.7 18607 16.69 17 0 1 850.7 18607 16.67 17 0 1 850.7 18607 16.69 17 0 1 850.7 18607 16.93 17 0 1 850.7 18607 1					1850.7	18607	16.73	17	0							
1 RB 2 1850.7 18607 16.67 17 0 1880 18900 16.57 17 0 1909.3 19193 16.36 17 0 1909.3 19193 16.36 17 0 1909.3 19193 16.37 17 0 1909.3 19193 16.37 17 0 1909.3 19193 16.38 17 0 1909.3 19193 16.39 17 0 1880 18900 16.51 17 0 1909.3 19193 16.39 17 0 1909.3 19193 16.39 17 0 1909.3 19193 16.39 17 0 1909.3 19193 16.39 17 0 1909.3 19193 16.39 17 0 1909.3 19193 16.39 17 0 1909.3 19193 16.39 17 0 1909.3 19193 16.39 17 0 1909.3 19193 16.39 17 0 1909.3 19193 16.39 17 0 1909.3 19193 16.39 17 0 1909.3 19193 16.39 17 0 1909.3 19193 16.39 17 0 1909.3 19193 16.35 17 0 1909.3 19193 16.35 17 0 1909.3 19193 16.37 17 0 1909.3 19193 16.37 17 0 1909.3 19193 16.37 17 0 1909.3 19193 16.37 17 0 1909.3 19193 16.37 17 0 1880 18900 16.91 17 0 1909.3 19193 16.59 17 0 1880 18900 16.91 17 0 1909.3 19193 16.59 17 0 1909.3 19193 16.64 17 0 1909.3 19193 16.64 17 0 1909.3 19193 16.64 17 0 1909.3 19193 16.64 17 0 1909.3 19193 16.64 17 0 1909.3 19193 16.64 17 0 1909.3 19193 16.64 17 0 1909.3 19193 16.64 17 0 1909.3 19193 16.64 17 0 1909.3 19193 16.64 17 0 1909.3 19193 16.64 17 0 1909.3 19193 16.64 17 0 1909.3 19193 16.64 17 0 1909.3 19193 16.64 17 0 1880 18900 16.65 17 0 1880 18900 16.65 17 0 1880 18900 16.69 17 0 1880 18900 16.69 17 0 1880 18900 16.69 17 0 1880 18900 16.69 17 0 1880 18900 16.69 17 0 1880 18900 16.69 17 0 1880 18900 16.69 17 0 1880 18900 16.69 17 0 0 1				0	1880	18900	16.54	17	0							
1.4 1 RB					1909.3	19193	16.31	17	0							
1.4 199.3 19193 16.36 17 0					1850.7	18607	16.67	17	0							
APSK QPSK 0 1880.7 18607 16.60 17 0 1909.3 19193 16.38 17 0 1880.7 18607 16.66 17 0 1890.3 19193 16.39 17 0 1890.3 19193 16.39 17 0 1890.3 19193 16.39 17 0 1890.3 19193 16.39 17 0 1890.3 19193 16.39 17 0 1890.3 19193 16.53 17 0 1909.3 19193 16.53 17 0 1890.3 19193 16.53 17 0 1890.3 19193 16.53 17 0 1890.3 19193 16.53 17 0 1909.3 19193 16.35 17 0 1890.3 19193 16.35 17 0 1890.3 19193 16.37 17 0 1890.3 19193 16.37 17 0 1890.3 19193 16.37 17 0 1890.3 19193 16.59 17 0 1880.7 18607 16.93 17 0 1880.7 18607 16.93 17 0 1880.7 18607 16.93 17 0 1880.7 18607 16.93 17 0 1880.7 18607 16.93 17 0 1880.7 18607 16.93 17 0 1880.7 18607 16.93 17 0 1880.7 18607 16.93 17 0 1880.7 18607 16.93 17 0 1880.7 18607 16.93 17 0 1880.7 18607 16.93 17 0 1880.7 18607 16.93 17 0 1880.7 18607 16.93 17 0 1880.7 18607 16.93 17 0 1880.7 18607 16.93 17 0 1880.7 18607 16.93 17 0 1880.7 18607 16.93 17 0 1880.7 18607 16.93 17 0 1880.7 18607 16.92 17 0 1880.7 18607 16.92 17 0 1880.7 1890.0 16.94 17 0 1880.7 1890.0 16.94 17 0 1880.7 1890.0 16.95 17 0 1880.7 1890.0 16.95 17 0 1880.7 1890.0 16.95 17 0 1880.7 1890.0 16.95 17 0 1880.7 1890.0 16.55 17 0 1890.3 19193 16.68 17 0 1890.3 19193 16.68 17 0 1890.3 19193 16.68 17 0 1890.3 19193 16.68 17 0 1890.3 19193 16.68 17 0 1890.3 19193 16.68 17 0 1890.3 19193 16.69 17 0			1 RB	2	1880	18900	16.57	17	0							
1.4 Second Part					1909.3	19193	16.36	17	0							
APSK 1909.3					1850.7	18607		17	0							
1.4 O				5	1880	18900	16.51	17	0							
1.4 O					1909.3	19193		17	0							
1.4 1993.3				0				17								
1.4 1.4 1.4 1.4 1.4 1.4 1.4 1.6-QAM 1.6 1.6 1.6 1.6 1.6 1.6 1.6 1.		QPSK						17	0							
1.4 1.4 1.4					1909.3		1	17	0							
1.4 199.3 19183 16.39 17 0 1850.7 18607 16.69 17 0 1909.3 19193 16.35 17 0 1909.3 19193 16.35 17 0 1850.7 18607 16.67 17 0 1850.7 18607 16.67 17 0 1850.7 18607 16.53 17 0 1909.3 19193 16.37 17 0 1850.7 18607 16.93 17 0 1850.7 18607 16.93 17 0 1909.3 19193 16.59 17 0 1850.7 18607 16.93 17 0 1909.3 19193 16.64 17 0 1909.3 19193 16.64 17 0 1909.3 19193 16.84 17 0 1850.7 18607 16.92 17 0 1850.7 18607 16.92 17 0 1850.7 18607 16.92 17 0 1850.7 18607 16.92 17 0 1850.7 18607 16.92 17 0 1850.7 18607 16.92 17 0 1850.7 18607 16.92 17 0 1850.7 18607 16.92 17 0 1850.7 18607 16.92 17 0 1850.7 18607 16.92 17 0 1850.7 18607 16.92 17 0 1850.7 18607 16.92 17 0 1850.7 18607 16.92 17 0 1850.7 18607 16.92 17 0 1850.7 18607 16.86 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.85 17 0 1909.3 19193 16.68 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0																
1.4 1.4 1.4 1.4 1.6 1.6 1.6 1.6				2												
1.4 1.4 1.4 1.4 1.4 1.4 1.4 1.4									0							
1.4 199.3 19193 16.35 17 0 1850.7 18607 16.67 17 0 1909.3 19193 16.53 17 0 1909.3 19193 16.53 17 0 1909.3 19193 16.37 17 0 1850.7 18607 16.93 17 0 1850.7 18607 16.93 17 0 1850.7 18607 16.93 17 0 1850.7 18607 16.93 17 0 1850.7 18607 16.93 17 0 1850.7 18607 16.93 17 0 1850.7 18607 16.92 17 0 1850.7 18607 16.92 17 0 1850.7 18607 16.88 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0																
1.4 1.4				3												
1.4 1.4 1.4																
1.4 1909.3																
1.4 1			6	RB												
1 RB 2 1880 18900 16.91 17 0 1909.3 19193 16.59 17 0 1880.7 18607 16.93 17 0 1909.3 19193 16.64 17 0 1909.3 19193 16.64 17 0 1880.7 18607 16.92 17 0 1880.7 18607 16.92 17 0 1880.7 18607 16.92 17 0 1880.7 1890.3 19193 16.86 17 0 1880.7 18607 16.92 17 0 1880.7 18607 16.92 17 0 1880.7 18607 16.92 17 0 1880.7 18607 16.92 17 0 1880.7 18607 16.92 17 0 1880.7 18607 16.92 17 0 1880.7 18607 16.92 17 0 1880.7 18607 16.49 17 0 1880.7 18607 16.85 17 0 1880.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.77 17 0 1850.7 18607 16.77 17 0 1850.7 18607 16.77 17 0 1850.7 18607 16.75 17 0 1850.7 18607 16.75 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 0 1850.7 1860.7 16.86 17 0 0 1850.7 1860.	1.4			1												
1 RB 2 1850.7 18607 16.93 17 0 1909.3 19193 16.64 17 0 1909.3 19193 16.64 17 0 1909.3 19193 16.86 17 0 1850.7 18607 16.92 17 0 1880 18900 16.86 17 0 1909.3 19193 16.88 17 0 1880 18900 16.49 17 0 1880 18900 16.49 17 0 1880 18900 16.49 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1909.3 19193 16.68 17 0 1850.7 18607 16.77 17 0 1850.7 18607 16.77 17 0 1850.7 18607 16.75 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.59 17 0 1850.7 18800 18900 16.59 17 0 17 0 1850.7 18800 18900 16.59 17 0 1850.7 18800 18900 16.59 17 0 1850.7 18800 18900 16.59 17 0 1850.7 18800 18900 16.59 17 0 1850.7 18800 18900 16.59 17 0 1850.7 18800 18900 16.59 17 0 1850.7 18800 18900 16.59 17 0 1850.7 18800 18900 16.59 17 0 1850.7 18800 18900 16.59 17 0 1850.7 18800 18900 16.59 17 0 1850.7 18800 18900 16.59 17 0 1850.7 18800 18900 16.59 17 0 1850.7 18800 18900 16.59 17 0 1850.7 18800 18900 16.59 17 0 1850.7 18800 18900 16.59 17 0 1850.7 18800 18900 16.59 17 0 1850.7 1850.7 18800 18900 16.59 17 0 1850.7 1850.7 18800 18900 16.59 17 0 1850.7 1850.7 18800 18900 16.59 17 0 1850.7 1850.7 18800 18900 16.59 17 0 1850.7 18800 18900 16.59 17 0 1850.7 1850.7 1850.7 18800 18900 16.59 17 0 1850.7 1850.				0												
1 RB 2 1850.7 18607 16.93 17 0 1909.3 19193 16.64 17 0 1850.7 18607 16.92 17 0 1850.7 18607 16.92 17 0 1909.3 19193 16.86 17 0 1909.3 19193 16.88 17 0 1850.7 18607 16.92 17 0 1850.7 18607 16.92 17 0 1850.7 18607 16.92 17 0 1850.7 18607 16.49 17 0 1909.3 19193 16.49 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.68 17 0 1909.3 19193 16.68 17 0 1850.7 18607 16.77 17 0 1850.7 18607 16.75 17 0 1850.7 18607 16.75 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.86 17 0 1850.7 18607 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 1860																
1 RB 2 1880 18900 16.92 17 0 1909.3 19193 16.64 17 0 1850.7 18607 16.92 17 0 1909.3 19193 16.86 17 0 1909.3 19193 16.88 17 0 1850.7 18607 16.92 17 0 1850.7 18607 16.92 17 0 1880 18900 16.49 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1909.3 19193 16.68 17 0 1909.3 19193 16.68 17 0 1850.7 18607 16.77 17 0 1850.7 18607 16.75 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.75 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.59 17 0 1850.7 18607 18																
1909.3 19193 16.64 17 0 1850.7 18607 16.92 17 0 1880 18900 16.86 17 0 1909.3 19193 16.88 17 0 1850.7 18607 16.92 17 0 1880 18900 16.49 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1909.3 19193 16.68 17 0 1909.3 19193 16.68 17 0 1850.7 18607 16.77 17 0 1850.7 18607 16.75 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.75 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.86 17 0																
1850.7 18607 16.92 17 0 1880 18900 16.86 17 0 1909.3 19193 16.88 17 0 1850.7 18607 16.92 17 0 1880 18900 16.49 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.85 17 0 1880 18900 16.30 17 0 1909.3 19193 16.68 17 0 1850.7 18607 16.77 17 0 1850.7 18607 16.77 17 0 1850.7 18607 16.77 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.77 17 0 1850.7 18607 16.75 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0			1 RB	2												
16-QAM 1880 18900 16.86 17 0 1909.3 19193 16.88 17 0 1850.7 18607 16.92 17 0 1880 18900 16.49 17 0 1909.3 19193 16.49 17 0 1880 18900 16.85 17 0 1880 18900 16.30 17 0 1909.3 19193 16.68 17 0 1850.7 18607 16.77 17 0 1850.7 18607 16.77 17 0 1850.7 18607 16.77 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.75 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0							1									
16-QAM 1909.3 19193 16.88 17 0 1850.7 18607 16.92 17 0 1880 18900 16.49 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.85 17 0 1880 18900 16.30 17 0 1909.3 19193 16.68 17 0 1850.7 18607 16.77 17 0 1850.7 18607 16.77 17 0 1850.7 18607 16.75 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0				_												
16-QAM 0 1850.7 18607 16.92 17 0 1880 18900 16.49 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1909.3 19193 16.68 17 0 1850.7 18607 16.77 17 0 1850.7 18607 16.77 17 0 1850.7 18607 16.77 17 0 1850.7 18607 16.49 17 0 1850.7 18607 16.49 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0				5												
16-QAM 1880 18900 16.49 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.85 17 0 18909.3 19193 16.68 17 0 18909.3 19193 16.68 17 0 1850.7 18607 16.77 17 0 1850.7 18607 16.75 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0																
3 RB 2 1850.7 18607 16.85 17 0 1850.7 18607 16.85 17 0 1890.3 19193 16.68 17 0 1909.3 19193 16.68 17 0 1850.7 18607 16.77 17 0 1850.7 18607 16.75 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0		16 OAM		0												
3 RB 2 1850.7 18607 16.85 17 0 1880 18900 16.30 17 0 1909.3 19193 16.68 17 0 1850.7 18607 16.77 17 0 1880 18900 16.75 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0		10-QAW		U					-							
3 RB 2 1880 18900 16.30 17 0 1909.3 19193 16.68 17 0 1850.7 18607 16.77 17 0 1880 18900 16.75 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.86 17 0 1850.7 18607 16.86 17 0 1880 18900 16.59 17 0																
1909.3 19193 16.68 17 0 1850.7 18607 16.77 17 0 3 1880 18900 16.75 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.86 17 0 6RB 1880 18900 16.59 17 0			3 PP	2												
3 1850.7 18607 16.77 17 0 1880 18900 16.75 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.86 17 0 6RB 1880 18900 16.59 17 0			SIND													
3 1880 18900 16.75 17 0 1909.3 19193 16.49 17 0 1850.7 18607 16.86 17 0 6RB 1880 18900 16.59 17 0																
1909.3 19193 16.49 17 0 1850.7 18607 16.86 17 0 6RB 1880 18900 16.59 17 0				2												
1850.7 18607 16.86 17 0 6RB 1880 18900 16.59 17 0				3												
6RB 1880 18900 16.59 17 0																
			61	₽R												
1909.3 19193 16.41 17 0			6RB		1909.3	19193	16.41		0							

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 70 of 328

FDD Band 4											
				, DD Danu 4			Torest				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1720	20050	17.29	17.5	0			
			0	1732.5	20175	17.46	17.5	0			
				1745	20300	17.27	17.5	0			
				1720	20050	17.15	17.5	0			
		1 RB	50	1732.5	20175	16.98	17.5	0			
				1745	20300	17.09	17.5	0			
				1720	20050	17.12	17.5	0			
			99	1732.5	20175	16.91	17.5	0			
				1745	20300	17.27	17.5	0			
			0	1720	20050	17.17	17.5	0			
	QPSK	QPSK 50RB		1732.5	20175	17.11	17.5	0			
				1745	20300	16.92	17.5	0			
				1720	20050	17.16	17.5	0			
			25	1732.5	20175	17.01	17.5	0			
				1745	20300	17.12	17.5	0			
				1720	20050	17.14	17.5	0			
			50	1732.5	20175	16.97	17.5	0			
				1745	20300	17.29	17.5	0			
		400		1720	20050	17.35	17.5	0			
		100)RB	1732.5	20175	17.14	17.5	0			
20				1745	20300	17.32	17.5	0			
			0	1720	20050	17.35	17.5	0			
				1732.5	20175	17.38	17.5	0			
				1745	20300	17.33	17.5	0			
		1 RB	50	1720	20050	17.36	17.5	0			
		IRD	50	1732.5	20175	17.38	17.5	0			
				1745 1720	20300 20050	17.41 17.41	17.5 17.5	0			
			99	1732.5	20050	17.41	17.5	0			
			33	1732.3	20300	17.42	17.5	0			
				1743	20050	17.42	17.5	0			
	16-QAM		0	1732.5	20175	17.23	17.5	0			
	10 00/11/1		Ü	1745	20300	17.03	17.5	0			
				1743	20050	17.03	17.5	0			
		50RB	25	1732.5	20175	17.23	17.5	0			
		COND		1732.3	20300	17.04	17.5	0			
				1740	20050	17.21	17.5	0			
			50	1732.5	20175	16.93	17.5	0			
				1732.3	20300	17.35	17.5	0			
				1740	20050	17.23	17.5	0			
		100)RB	1732.5	20175	17.15	17.5	0			
		100R		1745	20300	17.25	17.5	0			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 71 of 328

				FDD Band 4				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1717.5	20025	16.90	17.5	0
			0	1732.5	20175	17.21	17.5	0
				1747.5	20325	16.86	17.5	0
				1717.5	20025	17.03	17.5	0
		1 RB	36	1732.5	20175	17.09	17.5	0
				1747.5	20325	17.10	17.5	0
				1717.5	20025	17.06	17.5	0
			74	1732.5	20175	16.91	17.5	0
				1747.5	20325	17.26	17.5	0
			0	1717.5	20025	17.16	17.5	0
	QPSK	SK		1732.5	20175	17.06	17.5	0
				1747.5	20325	16.98	17.5	0
				1717.5	20025	17.21	17.5	0
		36RB	18	1732.5	20175	17.06	17.5	0
				1747.5	20325	17.22	17.5	0
				1717.5	20025	17.13	17.5	0
			37	1732.5	20175	16.95	17.5	0
				1747.5	20325	17.27	17.5	0
				1717.5	20025	17.15	17.5	0
		75	RB	1732.5	20175	17.09	17.5	0
15				1747.5	20325	17.28	17.5	0
			0	1717.5	20025	17.25	17.5	0
				1732.5	20175	17.45	17.5	0
				1747.5	20325	16.92	17.5	0
				1717.5	20025	17.37	17.5	0
		1 RB	36	1732.5	20175	17.45	17.5	0
				1747.5	20325	17.08	17.5	0
				1717.5	20025	17.45	17.5	0
			74	1732.5	20175	17.41	17.5	0
				1747.5	20325	17.38	17.5	0
	40.0			1717.5	20025	17.25	17.5	0
	16-QAM		0	1732.5	20175	17.16	17.5	0
				1747.5	20325	17.05	17.5	0
		0077	4.5	1717.5	20025	17.27	17.5	0
		36RB	18	1732.5	20175	17.01	17.5	0
				1747.5	20325	17.31	17.5	0
			07	1717.5	20025	17.18	17.5	0
			37	1732.5	20175	16.99	17.5	0
				1747.5	20325	17.35	17.5	0
	75Ri	 -	DD	1717.5	20025	17.28	17.5	0
		KR	1732.5	20175	17.01	17.5	0	
				1747.5	20325	17.31	17.5	0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 72 of 328

	FDD Band 4											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1715	20000	17.09	17.5	0				
			0	1732.5	20175	17.07	17.5	0				
				1750	20350	17.02	17.5	0				
				1715	20000	17.11	17.5	0				
		1 RB	25	1732.5	20175	16.94	17.5	0				
				1750	20350	17.32	17.5	0				
				1715	20000	17.22	17.5	0				
			49	1732.5	20175	16.94	17.5	0				
				1750	20350	17.37	17.5	0				
				1715	20000	17.14	17.5	0				
	QPSK	PSK 25RB	0	1732.5	20175	17.15	17.5	0				
				1750	20350	17.26	17.5	0				
				1715	20000	17.21	17.5	0				
			12	1732.5	20175	17.09	17.5	0				
				1750	20350	17.35	17.5	0				
				1715	20000	17.14	17.5	0				
			25	1732.5	20175	17.02	17.5	0				
				1750	20350	17.34	17.5	0				
				1715	20000	17.12	17.5	0				
		50	RB	1732.5	20175	17.04	17.5	0				
10				1750	20350	17.31	17.5	0				
.0			0	1715	20000	17.06	17.5	0				
				1732.5	20175	17.39	17.5	0				
				1750	20350	17.39	17.5	0				
				1715	20000	17.36	17.5	0				
		1 RB	25	1732.5	20175	17.45	17.5	0				
				1750	20350	17.33	17.5	0				
				1715	20000	17.38	17.5	0				
			49	1732.5	20175	17.38	17.5	0				
				1750	20350	17.44	17.5	0				
			_	1715	20000	17.19	17.5	0				
	16-QAM		0	1732.5	20175	17.12	17.5	0				
				1750	20350	17.33	17.5	0				
		0555	40	1715	20000	17.26	17.5	0				
		25RB	12	1732.5	20175	17.15	17.5	0				
				1750	20350	17.30	17.5	0				
			25	1715	20000	17.32	17.5	0				
			25	1732.5	20175	17.08	17.5	0				
				1750	20350	17.43	17.5	0				
			DD	1715	20000	17.10	17.5	0				
		50	RB	1732.5	20175	17.07	17.5	0				
				1750	20350	17.43	17.5	0				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 73 of 328

BW(Mhz) Modulation RB Size RB Offset Frequency (MHz) Channel Conducted power (dBm) Frequency (MHz) Channel Conducted power (dBm) Max Tolerance (dBm) Max					FDD Band 4						
O 1732.5 20175 17.12 17.5 0 1752.5 20375 17.31 17.5 0 1712.5 19975 16.94 17.5 0 1712.5 19975 17.04 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1712.5 19975 17.02 17.5 0 1712.5 19975 17.04 17.5 0 1712.5 19975 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.06 17.5 0 1752.5 20375 17.09 17.5 0 1752.5 20375 17.09 17.5 0 1752.5 20375 17.09 17.5 0 1752.5 20375 17.03 17.5 0 1752.5 20375 17.03 17.5 0 1752.5 20375 17.01 17.5 0 1752.5 20375 17.03 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.06 17.5 0 1752.5 20375 17.06 17.5 0 1752.5 20375 17.06 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.32 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.38 17.5 0	BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel		Power + Max. Tolerance	MPR Allowed per 3GPP(dB)		
1 RB 12 1732.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.02 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.06 17.5 0 1752.5 20375 17.09 17.5 0 1752.5 20375 17.09 17.5 0 1752.5 20375 17.03 17.5 0 1752.5 20375 17.03 17.5 0 1752.5 20375 17.03 17.5 0 1752.5 20375 17.03 17.5 0 1752.5 20375 17.06 17.5 0 1752.5 20375 17.06 17.5 0 1752.5 20375 17.06 17.5 0 1752.5 20375 17.06 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.06 17.5 0 1752.5 20375 17.06 17.5 0 1752.5 20375 17.33 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.30 17.5 0 1752.5 20375 17.40 17.5 0 1752.5 20375 17.40 17.5 0 1752.5 20375 17.40 17.5 0					1712.5	19975	16.94	17.5	0		
1 RB 12 1712.5 19975 16.94 17.5 0 1732.5 20175 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.02 17.5 0 1752.5 20375 17.02 17.5 0 1752.5 20375 17.06 17.5 0 1752.5 20375 17.06 17.5 0 1752.5 20375 17.08 17.5 0 1752.5 20375 17.08 17.5 0 1752.5 20375 17.09 17.5 0 1752.5 20375 17.03 17.5 0 1752.5 20375 17.03 17.5 0 1752.5 20375 17.03 17.5 0 1752.5 20375 17.03 17.5 0 1752.5 20375 17.03 17.5 0 1752.5 20375 17.03 17.5 0 1752.5 20375 17.03 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.30 17.5 0 1752.5 20375 17.30 17.5 0 1752.5 20375 17.30 17.5 0 1752.5 20375 17.30 17.5 0 1752.5 20375 17.30 17.5 0 1752.5 20375 17.30 17.5 0 1752.5 20375 17.30 17.5 0 1752.5 20375 17.30 17.5 0 1752.5 20375 17.30 17.5 0 1752.5 20375 17.30 17.5 0 1752.5 20375 17.30 17.5 0 1752.5 20375 17.30 17.5 0 1752.5 20375 17.30 17.5 0				0	1732.5	20175	17.12	17.5	0		
APPENDICATE 1 RB 12 1732.5 20175 1752.5 20375 17.31 17.5 0 1752.5 17975 179.5 17					1752.5	20375	17.31	17.5	0		
A THE PART OF THE					1712.5	19975	16.94	17.5	0		
APPLIED TO SERBLE STATE OF THE PART OF THE			1 RB	12	1732.5	20175	17.04	17.5	0		
APSK QPSK					1752.5	20375	17.31	17.5	0		
QPSK QPSK 0 1752.5 1773.5					1712.5	19975	17.02	17.5	0		
OPSK 1712.5 19975 16.97 17.5 0				24	1732.5	20175	17.04	17.5	0		
PARK O 1732.5 1752.					1752.5	20375	17.36	17.5	0		
12RB 1752.5 20375 17.23 17.5 0 1712.5 19975 17.03 17.5 0 1752.5 20375 17.28 17.5 0 1752.5 20375 17.28 17.5 0 1752.5 20375 17.05 17.5 0 1752.5 20375 17.05 17.5 0 1712.5 19975 17.05 17.5 0 1752.5 20375 17.33 17.5 0 1752.5 20375 17.33 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.06 17.5 0 1752.5 20375 17.06 17.5 0 1752.5 20375 17.32 17.5 0 1752.5 20375 17.32 17.5 0 1752.5 20375 17.32 17.5 0 1752.5 20375 17.45 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.32 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.31 17.5 0					1712.5	19975	16.97	17.5	0		
12RB 6 1712.5 19975 17.03 17.5 0 1732.5 20175 17.01 17.5 0 1752.5 20375 17.05 17.5 0 1712.5 19975 17.05 17.5 0 1752.5 20375 17.08 17.5 0 1752.5 20375 17.08 17.5 0 1752.5 20375 17.08 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.09 17.5 0 1752.5 20375 17.09 17.5 0 1752.5 20375 17.09 17.5 0 1752.5 20375 17.32 17.5 0 1752.5 20375 17.32 17.5 0 1752.5 20375 17.32 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.10 17.5 0 1752.5 20375 17.11 17.5 0 1752.5 20375 17.13 17.5 0 1752.5 20375 17.11 17.5 0 1752.5 20375 17.13 17.5 0 1752.5 20375 17.11 17.5 0		QPSK		0		17.09		0			
12RB 6 1732.5 20175 17.01 17.5 0 1752.5 20375 17.28 17.5 0 1712.5 19975 17.05 17.5 0 1732.5 20175 16.99 17.5 0 1752.5 20375 17.33 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.06 17.5 0 1752.5 20375 17.06 17.5 0 1752.5 20375 17.32 17.5 0 1752.5 20375 17.32 17.5 0 1752.5 20375 17.32 17.5 0 1752.5 20375 17.32 17.5 0 1752.5 20375 17.32 17.5 0 1752.5 20375 17.32 17.5 0 1752.5 20375 17.32 17.5 0 1752.5 20375 17.32 17.5 0 1752.5 20375 17.32 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.10 17.5 0 1752.5 20375 17.10 17.5 0 1752.5 20375 17.11 17.5 0 1752.5 20375 17.11 17.5 0 1752.5 20375 17.11 17.5 0 1752.5 20375 17.11 17.5 0					1752.5	20375	17.23	17.5	0		
1752.5 20375 17.28 17.5 0 1712.5 19975 17.05 17.5 0 1732.5 20175 16.99 17.5 0 1752.5 20375 17.33 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.04 17.5 0 1752.5 20375 17.06 17.5 0 1752.5 20375 17.06 17.5 0 1752.5 20375 17.06 17.5 0 1752.5 20375 17.32 17.5 0 1752.5 20375 17.32 17.5 0 1752.5 20375 17.32 17.5 0 1752.5 20375 17.32 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.32 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.10 17.5 0 1752.5 20375 17.10 17.5 0 1752.5 20375 17.11 17.5 0			12RB						0		
13				6		20175		17.5	0		
13					1752.5	20375	17.28		5 0 5 0 5 0 5 0 5 0 5 0 5 0 5 0		
1752.5 20375 17.33 17.5 0 1712.5 19975 17.04 17.5 0 1752.5 20375 17.06 17.5 0 1752.5 20375 17.29 17.5 0 1712.5 19975 17.32 17.5 0 1712.5 19975 17.32 17.5 0 1712.5 19975 17.32 17.5 0 1752.5 20375 17.29 17.5 0 1752.5 20375 17.29 17.5 0 1752.5 20375 17.32 17.5 0 1752.5 20375 17.45 17.5 0 1752.5 20375 17.34 17.5 0 1712.5 19975 17.38 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.30 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.41 17.5 0											
16-QAM 25RB 1712.5 19975 17.04 17.5 0 1732.5 20175 17.06 17.5 0 1752.5 20375 17.29 17.5 0 1712.5 19975 17.32 17.5 0 1712.5 19975 17.32 17.5 0 1712.5 19975 17.32 17.5 0 1732.5 20175 17.32 17.5 0 1752.5 20375 17.45 17.5 0 1712.5 19975 17.38 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.32 17.5 0 1712.5 19975 17.32 17.5 0 1712.5 19975 17.32 17.5 0 1712.5 19975 17.36 17.5 0 1712.5 19975 17.36 17.5 0 1712.5 19975 17.38 17.5 0 1712.5 19975 17.10 17.5 0 1712.5 19975 17.10 17.5 0 1712.5 19975 17.10 17.5 0 1712.5 19975 17.10 17.5 0 1712.5 19975 17.11 17.5 0 1712.5 19975 17.10 17.5 0 1712.5 19975 17.11 17.5 0 1712.5 19975 17.11 17.5 0 1712.5 19975 17.11 17.5 0 1712.5 19975 17.10 17.5 0 1712.5 19975 17.11 17.5 0 1712.5 19975 17.11 17.5 0 1712.5 19975 17.10 17.5 0 1712.5 19975 17.11 17.5 0 1712.5 19975 17.11 17.5 0 1712.5 19975 17.11 17.5 0 1712.5 19975 17.11 17.5 0 1712.5 19975 17.11 17.5 0 1712.5 19975 17.11 17.5 0 1712.5 19975 17.10 17.5 0 1712.5 19975 17.10 17.5 0 1712.5 19975 17.10 17.5 0 1712.5 19975 17.10 17.5 0				13					0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
1 RB							17.33	17.5	0		
1752.5 20375 17.29 17.5 0 1712.5 19975 17.32 17.5 0 1732.5 20175 16.92 17.5 0 1752.5 20375 17.45 17.5 0 1752.5 20375 17.45 17.5 0 1752.5 20375 17.45 17.5 0 1712.5 19975 17.38 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 16.75 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1712.5 19975 17.32 17.5 0 1712.5 19975 17.32 17.5 0 1752.5 20375 17.18 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.10 17.5 0 1752.5 20375 17.11 17.5 0 1752.5 20375 17.11 17.5 0 1752.5 20375 17.11 17.5 0 1752.5 20375 17.11 17.5 0 1752.5 20375 17.11 17.5 0 1752.5 20375 17.11 17.5 0 1752.5 20375 17.11 17.5 0											
1 RB			25	RB					0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
1 RB 12 1732.5 20175 16.92 17.5 0 1752.5 20375 17.45 17.5 0 1712.5 19975 17.38 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 17.34 17.5 0 1752.5 20375 16.75 17.5 0 1752.5 20375 16.75 17.5 0 1712.5 19975 17.32 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.41 17.5 1752.5 20375 17.41 17.5 1752.5 20375 17.41 17.5 1752.5 20375 17.	5										
1752.5 20375 17.45 17.5 0 1752.5 19975 17.38 17.5 0 1712.5 19975 17.34 17.5 0 1752.5 20375 16.75 17.5 0 1752.5 20375 17.32 17.5 0 1712.5 19975 17.32 17.5 0 1712.5 19975 17.32 17.5 0 1712.5 19975 17.36 17.5 0 1712.5 19975 17.36 17.5 0 1712.5 19975 16.95 17.5 0 1712.5 19975 17.06 17.5 0 1712.5 19975 17.06 17.5 0 1712.5 19975 17.10 17.5 0 1712.5 19975 17.10 17.5 0 1712.5 19975 17.10 17.5 0 1712.5 19975 17.11 17.5 0 1712.5 19975 17.12 17.5 0 1712.5 19975 17.13 17.5 0 1712.5 19975 17.13 17.5 0 1712.5 19975 17.13 17.5 0 1712.5 19975 17.13 17.5 0 1712.5 19975 17.13 17.5 0 1712.5 19975 17.13 17.5 0 1712.5 19975 17.13 17.5 0 1712.5 19975 17.13 17.5 0											
1 RB 12 1712.5 19975 17.38 17.5 0 1732.5 20175 17.34 17.5 0 1752.5 20375 16.75 17.5 0 1752.5 20375 17.32 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.10 17.5 0 1752.5 20375 17.10 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.41 17.5 0 1752.5 20375 17.41 17.5 0 1752.5 20375 17.41 17.5 0 1752.5 20375 17.41 17.5 0 1752.5 20375 17.41 17.5 0 1752.5 20375 17.41 17.5 0 1752.5 20375 17.41 17.5 0 1752.5 20375 17.02 17.5 17.5 1752.5 20375 17.02 17.5 17.5 1752.5 20375 17.02 17.5 17.5 1752.5 20375 17.02 17.5 1752.5 20375 17.02 17.5 1752.5 20375 17.02 17.5 17.5 1752.5 1752.5 1752.5 1752.5				0							
1 RB 12 1732.5 20175 17.34 17.5 0 1752.5 20375 16.75 17.5 0 1712.5 19975 17.32 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.10 17.5 0 1752.5 20375 17.10 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.13 17.5 0 1752.5 20375 17.13 17.5 0 1752.5 20375 17.41 17.5 0 1752.5 20375 17.41 17.5 0 1752.5 20375 17.41 17.5 0 1752.5 20375 17.41 17.5 0 1752.5 20375 17.41 17.5 0 1752.5 19975 17.02 17.5 0 1752.5 19975 17.02 17.5 0 1752.5 19975 17.02 17.5 0 1752.5 19975 17.02 17.5 0 1752.5 1732.5 20175 17.10 17.5 17.5 1732.5 20175 17.10 17.5 17.5 1732.5 1732.5 20175 17.10 17.5 17.5 1732.5 1732.5 20175 17.10 17.5 17.5 1732.5 1732.5 20175 17.10 17.5 17.5 1732.5 1732.5 20175 17.10 17.5 17.5 1732.5 1732.5 20175 17.10 17.5 17.5 1732.5 173											
1752.5 20375 16.75 17.5 0 1712.5 19975 17.32 17.5 0 1732.5 20175 17.18 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1752.5 20375 17.36 17.5 0 1712.5 19975 16.95 17.5 0 1732.5 20175 17.06 17.5 0 1752.5 20375 17.38 17.5 0 1712.5 19975 17.10 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1712.5 19975 17.13 17.5 0 1712.5 19975 17.13 17.5 0 1712.5 19975 17.13 17.5 0 1752.5 20375 17.41 17.5 0 1752.5 20375 17.41 17.5 0											
1712.5 19975 17.32 17.5 0 1732.5 20175 17.18 17.5 0 1752.5 20375 17.36 17.5 0 1712.5 19975 16.95 17.5 0 1712.5 19975 16.95 17.5 0 1732.5 20175 17.06 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.10 17.5 0 1752.5 20375 17.10 17.5 0 1752.5 20375 17.11 17.5 0 1752.5 20375 17.13 17.5 0 1752.5 20375 17.13 17.5 0 1712.5 19975 17.13 17.5 0 1752.5 20375 17.41 17.5 0 1752.5 20375 17.41 17.5 0 1752.5 20375 17.41 17.5 0 1752.5 20375 17.41 17.5 0			1 RB	12							
16-QAM 16-QAM 16-QAM 16-QAM 1732.5						20175 16.92 17.5 20375 17.45 17.5 19975 17.38 17.5 20175 17.34 17.5 20375 16.75 17.5					
1752.5 20375 17.36 17.5 0 1712.5 19975 16.95 17.5 0 1732.5 20175 17.06 17.5 0 1752.5 20375 17.38 17.5 0 1752.5 20375 17.10 17.5 0 1752.5 20375 17.10 17.5 0 1752.5 20375 17.11 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 20375 17.31 17.5 0 1712.5 19975 17.13 17.5 0 1712.5 19975 17.13 17.5 0 1752.5 20375 17.41 17.5 0 1752.5 20375 17.41 17.5 0 1752.5 20375 17.41 17.5 0 1752.5 20375 17.41 17.5 0				0.4					-		
16-QAM 0 1712.5 19975 16.95 17.5 0 1732.5 20175 17.06 17.5 0 1752.5 20375 17.10 17.5 0 1712.5 19975 17.10 17.5 0 1712.5 19975 17.10 17.5 0 1752.5 20375 17.31 17.5 0 1712.5 19975 17.13 17.5 0 1712.5 19975 17.13 17.5 0 1712.5 19975 17.13 17.5 0 1712.5 19975 17.13 17.5 0 1712.5 19975 17.14 17.5 0 1712.5 19975 17.10 17.5 0 1752.5 20175 17.41 17.5 0 1712.5 19975 17.10 17.5 0				24			_				
16-QAM 10											
1752.5 20375 17.38 17.5 0 1712.5 19975 17.10 17.5 0 1732.5 20175 17.10 17.5 0 1752.5 20375 17.31 17.5 0 1712.5 19975 17.13 17.5 0 1712.5 19975 17.13 17.5 0 1752.5 20375 16.97 17.5 0 1752.5 20375 17.41 17.5 0 1752.5 19975 17.02 17.5 0 25RB 1732.5 20175 17.02 17.5 0		16 0 14		0							
12RB 6 1732.5 19975 17.10 17.5 0 1732.5 20175 17.10 17.5 0 1752.5 20375 17.31 17.5 0 1712.5 19975 17.13 17.5 0 1732.5 20175 16.97 17.5 0 1752.5 20375 17.41 17.5 0 1712.5 19975 17.02 17.5 0 25RB 1732.5 20175 17.10 17.5 0		10-QAIVI		U			+		-		
12RB 6 1732.5 20175 17.10 17.5 0 1752.5 20375 17.31 17.5 0 1752.5 19975 17.13 17.5 0 1732.5 20175 16.97 17.5 0 1752.5 20375 17.41 17.5 0 1752.5 20375 17.41 17.5 0 1752.5 19975 17.02 17.5 0 1712.5 19975 17.02 17.5 0 1732.5 20175 17.10 17.5 0											
1752.5 20375 17.31 17.5 0 1712.5 19975 17.13 17.5 0 13 1732.5 20175 16.97 17.5 0 1752.5 20375 17.41 17.5 0 1712.5 19975 17.02 17.5 0 25RB 1732.5 20175 17.10 17.5 0			12DD	6							
1712.5 19975 17.13 17.5 0 1732.5 20175 16.97 17.5 0 1752.5 20375 17.41 17.5 0 1712.5 19975 17.02 17.5 0 25RB 1732.5 20175 17.10 17.5 0			IZND	U							
13 1732.5 20175 16.97 17.5 0 1752.5 20375 17.41 17.5 0 1712.5 19975 17.02 17.5 0 25RB 1732.5 20175 17.10 17.5 0											
1752.5 20375 17.41 17.5 0 1712.5 19975 17.02 17.5 0 25RB 1732.5 20175 17.10 17.5 0				12							
1712.5 19975 17.02 17.5 0 25RB 1732.5 20175 17.10 17.5 0				10							
25RB 1732.5 20175 17.10 17.5 0		25R									
			25	RB							
1752.5 20375 17.28 17.5 0								•			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 74 of 328

				FDD Band 4						
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				1711.5	19965	16.92	17.5	0		
			0	1732.5	20175	16.92	17.5	0		
				1753.5	20385	17.20	17.5	0		
				1711.5	19965	16.94	17.5	0		
		1 RB	7	1732.5	20175	17.07	17.5	0		
				1753.5	20385	17.23	17.5	0		
				1711.5	19965	16.92	17.5	0		
			14	1732.5	20175	16.93	17.5	0		
				1753.5	20385	17.18	17.5	0		
				1711.5	19965	16.93	17.5	0		
	QPSK		0	1732.5	20175	17.05	17.5	0		
				1753.5	20385	17.28	17.5	0		
				1711.5	19965	16.93	16.93 17.5 0 17.03 17.5 0	0		
		8RB	4	1732.5	20175	17.03	17.5	0		
				1753.5	20385	17.25	17.5	0		
				1711.5	19965	17.03	17.5	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
			7	1732.5	20175	16.97	17.5			
				1753.5	20385	17.32	17.5	0		
				1711.5	19965	16.95	17.5	0		
		15	RB					0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
3										
				1711.5	19965					
			0							
		1 RB	7					ł		
				(MHz) Channel (MHz) power (dBm) Max. Tolerance (dBm) Allow 3GF 1711.5 19965 16.92 17.5 1732.5 20175 16.92 17.5 1753.5 20385 17.20 17.5 1711.5 19965 16.94 17.5 1732.5 20175 17.07 17.5 1753.5 20385 17.23 17.5 1711.5 19965 16.92 17.5 1732.5 20175 16.93 17.5 1753.5 20385 17.18 17.5 1732.5 20175 17.05 17.5 1732.5 20175 17.05 17.5 1753.5 20385 17.28 17.5 1732.5 20175 17.03 17.5 1753.5 20385 17.28 17.5 1753.5 20385 17.25 17.5 1753.5 20385 17.25 17.5 1753.5 20385 17.25 17.5						
			14							
								ł		
	16 0 14		_							
	16-QAM		0							
								0		
		000	4					0		
		8RB	4					0		
								0		
			7					0		
			/					0		
	15R							0		
		4 E	DD					0		
		מא					0			
				1/53.5	20385	17.29	17.5	0		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 75 of 328

	FDD Band 4											
				1 DD Danu 4			Torest					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1710.7	19957	16.87	17.5	0				
			0	1732.5	20175	17.12	17.5	0				
				1754.3	20393	17.32	17.5	0				
				1710.7	19957	16.84	17.5	0				
		1 RB	2	1732.5	20175	17.04	17.5	0				
				1754.3	20393	17.15	17.5	0				
				1710.7	19957	16.94	17.5	0				
			5	1732.5	20175	16.95	17.5	0				
				1754.3	20393	17.28	17.5	0				
				1710.7	19957	16.86		0				
	QPSK		0	1732.5	19957 16.86 17.5 20175 16.99 17.5 20393 17.34 17.5 19957 16.88 17.5 20175 17.04 17.5 20393 17.33 17.5 19957 16.91 17.5 20175 17.00 17.5 20393 17.24 17.5	0						
				1754.3		20393 17.34 17.5 0 19957 16.88 17.5 0 20175 17.04 17.5 0 20393 17.33 17.5 0	0					
		3RB		1710.7				0				
			2	1732.5								
				1754.3				+ MPR Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
			_	1710.7								
			3	1732.5								
				1754.3								
		0.5		1710.7	19957	16.93						
		61	₹B	1732.5	20175	17.05		0 0 0 0 0 0 0 0 0 0				
1.4				1754.3	20393	17.36						
		0	1710.7	19957	17.08							
			0	1732.5	20175	17.38						
				1754.3	20393	17.39						
		1 RB	2	1710.7	19957	17.23						
		IRD	2	1732.5	20175	16.95						
				1754.3 1710.7	20393 19957	17.37 17.41						
			5			17.41						
			3	1732.5 1754.3	20175 20393	17.20	05 17.5 36 17.5 08 17.5 38 17.5 39 17.5 23 17.5 95 17.5 37 17.5 41 17.5 41 17.5 41 17.5 75 17.5					
				1754.5	19957	16.75						
	16-QAM		0	1732.5	20175	17.25						
	10 Strivi			1754.3	20393	17.25	17.5	-				
				1734.3	19957	17.26	17.5					
		3RB	2	1710.7	20175	17.16	17.5					
		J. LD	_	1754.3	20393	17.10	17.5					
				1710.7	19957	17.05	17.5					
			3	1710.7	20175	16.94	17.5	0				
			_	1754.3	20393	17.12	17.5	0				
				1710.7	19957	17.15	17.5	0				
		6RB		1732.5	20175	17.13	17.5	0				
	סאו			1754.3	20393	17.36	17.5	0				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 76 of 328

				FDD Band 5						
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				829	20450	21.98	22	0		
			0	836.5	20525	21.82	22	0		
				844	20600	21.66	22	0		
				829	20450	21.97	22	0		
		1 RB	25	836.5	20525	21.89	22	0		
				844	20600	21.58	22	0		
				829	20450	21.90	22	0		
			49	836.5	20525	21.70	22	0		
				844	20600	21.96	22	0		
				829	20450	21.88	22	0		
	QPSK		0	836.5	20525	21.70	22	0		
				844	20600	21.75	22	0		
		25RB		829	20450	21.87	22	0		
			12	836.5	20525	21.68	22	0		
				844	20600	21.65	22	2 0 2 0 2 0 2 0 2 0 2 0 2 0 2 0 2 0 2 0		
				829	20450	21.87	22			
			25	836.5	20525	21.66	22			
				844	20600	21.90	22	0		
				829	20450	21.85	22	0		
		50	RB	836.5	20525	21.72	22	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
10				844	20600	21.80	22			
				829	20450	21.91	22			
			0	836.5	20525	21.41	22	_		
				844	20600	21.67	22			
				829	20450	20.97	22			
		1 RB	25	836.5	20525	21.34	22			
				844	20600	21.24	22			
			4-5	829	20450	21.76	22			
			49	836.5	20525	21.78	22			
				844	20600	21.87	22			
	40.0444			829	20450	21.02	22			
	16-QAM		0	836.5	20525	20.79	22	-		
				844	20600	20.81	22			
		0500	40	829	20450	21.00	22	0		
		25RB	12	836.5	20525	20.78	22	0		
				844	20600	20.75	22	0		
			25	829	20450	20.78	22	0		
			25	836.5	20525	20.83	22	0		
				844	20600	21.01	22	0		
	į,		DD	829	20450	21.00	22	0		
		50	RB	836.5	20525	20.74	22	0		
				844	20600	20.78	22	0		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 77 of 328

				FDD Band 5				
			1	. DD Dana 3			Torque	
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				826.5	20425	21.44	22	0
			0	836.5	20525	21.23	22	0
				846.5	20625	21.07	22	0
				826.5	20425	21.35	22	0
		1 RB	12	836.5	20525	21.22	22	0
				846.5	20625	21.27	22	0
				826.5	20425	21.40	22	0
			24	836.5	20525	21.15	22	0
				846.5	20625	21.35	22	0
				826.5	20425	21.33	22	0
	QPSK		0	836.5	20525	21.13	22	0
				846.5	20625	21.03	22	0
				826.5	20425	21.35	22	0
		12RB	6	836.5	20525	21.13 22 (0	
				846.5	20625	21.20	22	+ MPR Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0
				826.5	20425	21.36	22	
			13	836.5	20525	21.10	22	
				846.5	20625	21.25	22	0
				826.5	20425	21.34	22	0
		25	RB	836.5	20525	21.14	22	0
5				846.5	20625	21.25	22	0
				826.5	20425	20.99	22	0
			0	836.5	20525	21.72	22	0
				846.5	20625	21.21	22	0
				826.5	20425	21.81	22	0
		1 RB	12	836.5	20525	21.68	22	0
				846.5	20625	21.56	22	0
				826.5	20425	21.79	22	0
			24	836.5	20525	21.61	22	0
				846.5	20625	21.76	22	0
				826.5	20425	20.81	22	0
	16-QAM		0	836.5	20525	20.59	22	0
				846.5	20625	20.68	22	0
				826.5	20425	20.90	22	0
		12RB	6	836.5	20525	20.77	22	
				846.5	20625	20.84	22	
				826.5	20425	20.93	22	
			13	836.5	20525	20.69	22	
				846.5	20625	20.71	22	0
				826.5	20425	20.91	22	0
		25	RB	836.5	20525	20.69	22	0
				846.5	20625	20.82	22	0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 78 of 328

				FDD Band 5							
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				825.5	20415	21.37	22	0			
			0	836.5	20525	21.06	22	0			
				847.5	20635	21.04	22	0			
				825.5	20415	21.36	22	0			
		1 RB	7	836.5	20525	21.17	22	0			
				847.5	20635	21.28	22	0			
				825.5	20415	21.34	22	0			
			14	836.5	20525	21.09	22	0			
				847.5	20635	21.23	22	0			
				825.5	20415	21.32	22	0			
	QPSK		0	836.5	20525	21.12	22	0			
				847.5	20635	21.23	22	0			
		8RB		825.5	20415	21.32	22	0			
			4	836.5	20525	21.08	22	0			
				847.5	20635	21.24	22	0			
				825.5	20415	21.31	22	0 0 0 0 0 0 0 0 0 0 0 0			
			7	836.5	20525	21.14	22				
				847.5	20635	21.29	22	0			
				825.5	20415	21.31	22	0			
		15	RB	836.5	20525	21.11	22	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
3				847.5	20635	21.35	22	0			
				825.5	20415	21.28	22	0			
			0	836.5	20525	21.40	22	0			
				847.5	20635	20.79	22	0			
				825.5	20415	21.65	22	0			
		1 RB	7	836.5	20525	21.66	22	0			
				847.5	20635	21.64	22				
				825.5	20415	21.56	22				
			14	836.5	20525	21.56	22				
				847.5	20635	21.63	22				
	40.0			825.5	20415	20.78	22				
	16-QAM		0	836.5	20525	20.76	22	0			
				847.5	20635	20.70	22	0			
		0.55		825.5	20415	20.86	22	0			
		8RB	4	836.5	20525	20.72	22	0			
				847.5	20635	20.63	22	0			
			-	825.5	20415	20.85	22	0			
			7	836.5	20525	20.77	22	0			
				847.5	20635	20.75	22	0			
			DD	825.5	20415	20.92	22	0			
		15	RB	836.5	20525	20.70	22	0			
				847.5	20635	20.65	22	0			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 79 of 328

				FDD Band 5				
				1 DD Danu 3			Torest	
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				824.7	20407	21.30	22	0
			0	836.5	20525	21.06	22	0
				848.3	20643	21.23	22	0
				824.7	20407	21.26	22	0
		1 RB	2	836.5	20525	21.02	22	0
				848.3	20643	21.09	22	0
				824.7	20407	21.35	22	0
			5	836.5	20525	21.09	22	0
				848.3	20643	21.24	22	0
				824.7	20407	21.27	22	0
	QPSK		0	836.5	20525	21.03	22	0
				848.3	20643 21.14 22 20407 21.34 22 20525 21.03 22	22	0	
		3RB		824.7				0
			2	836.5	20525	21.03	22	0
				848.3	20643	21.12	22	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
				824.7	20407	21.29	22	
			3	836.5	20525	21.08	22	
				848.3	20643	21.14	22	0
				824.7	20407	21.23	22	0
		6F	RB	836.5			22	0
1.4				848.3	20643	21.17	22	0
			_	824.7	20407	21.61	22	0
			0	836.5	20525		22	
				848.3				
				824.7	20525 21.02 22 0 20407 21.35 22 0 20525 21.09 22 0 20643 21.24 22 0 20407 21.27 22 0 20525 21.03 22 0 20643 21.14 22 0 20643 21.14 22 0 20643 21.14 22 0 20407 21.34 22 0 20525 21.03 22 0 20643 21.12 22 0 20643 21.12 22 0 20525 21.08 22 0 20525 21.08 22 0 20643 21.14 22 0 20643 21.17 22 0 20525 21.05 22 0 20643 21.17 22 0 20643 21.72 2			
		1 RB	2	836.5				
				848.3		1		
			_	824.7		+		0
			5	836.5				
				848.3				
	40.044			824.7				
	16-QAM		0	836.5				-
				848.3				0
		000		824.7				
		3RB	2	836.5				
				848.3				
			_	824.7				
			3	836.5				
				848.3				
		25	D	824.7				0
		6F	RB	836.5	20525	20.72	22	0
				848.3	20643	20.69	22	0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 80 of 328

				FDD Band 7						
				, DD Danu 7			Torest			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				2510	20850	17.43	17.5	0		
			0	2535	21100	17.49	17.5	0		
				2560	21350	17.47	17.5	0		
				2510	20850	17.42	17.5	0		
		1 RB	50	2535	21100	17.38	17.5	0		
				2560	21350	17.45	17.5	0		
				2510	20850	17.44	17.5	0		
			99	2535	21100	17.44	17.5	0		
				2560	21350		17.5	0		
				2510	20850	17.21	17.5	0		
	QPSK		0	2535				0		
				2560		17.39	17.5	0		
		EDD		2510		17.25	17.5	0		
		5RB	25	2535				MPR Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0		
				2560						
				2510				Allowed per 3GPP(dB) Allowed per 3GPP(dB) O O O O O O O O O O O O O		
			50	2535						
				2560						
				2510						
		100)RB	2535						
20			1	2560						
				2510				_		
			0	2535						
				2560						
				2510						
		1 RB	50	2535						
				2560						
			00	2510		21100 17.49 17.5 0 21350 17.47 17.5 0 20850 17.42 17.5 0 21100 17.38 17.5 0 21350 17.45 17.5 0 20850 17.44 17.5 0 21100 17.44 17.5 0 21350 17.41 17.5 0 21350 17.41 17.5 0 21100 17.16 17.5 0 21350 17.39 17.5 0 21350 17.39 17.5 0 20850 17.25 17.5 0 21350 17.31 17.5 0 21350 17.31 17.5 0 21350 17.34 17.5 0 21350 17.34 17.5 0 21350 17.34 17.5 0 21350 17.41 17.5 0 21350 <td></td>				
			99	2535			17.5 0 17.5 0 <td< td=""></td<>			
				2560						
	16-QAM		0	2510 2535						
	10-QAIVI		U	2535				_		
				2560 2510						
		5RB	25	2510 2535						
		21/12	25	2560						
				2510						
			50	2535						
				2560						
				2510						
		100)RB	2535						
		100		2560						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 81 of 328

				FDD Band 7					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				2507.5	20825	17.13	17.5	0	
			0	2535	21100	17.01	17.5	0	
				2562.5	21375	17.39	17.5	0	
				2507.5	20825	17.16	17.5	0	
		1 RB	36	2535	21100	17.25	17.5	0	
				2562.5	21375	17.40	17.5	0	
				2507.5	20825	17.47	17.5	0	
			74	2535	21100	17.45	17.5	0	
				2562.5	21375	17.42	17.5	0	
				2507.5	20825	17.19	17.5	0	
	QPSK		0	2535	21100	17.16	17.5	0	
				2562.5	21375	17.48	17.5	## MPR Allowed per 3GPP(dB)	
			2507.5	20825	17.25				
		36RB	18	2535	21100	17.25	17.5 0 17.5 0 17.5 0 17.5 0 17.5 0 17.5 0 17.5 0 17.5 0 17.5 0 17.5 0 17.5 0 17.5 0 17.5 0 17.5 0 17.5 0 17.5 0 17.5 0 17.5 0 17.5 0 17.5 0		
				2562.5	21375	17.42			
				2507.5	20825	17.34		Allowed per 3GPP(dB) O O O O O O O O O O O O O O O O O O	
			37	2535	21100	17.30			
				2562.5	21375	17.48		0	
				2507.5	20825	17.27			
		75	RB	2535	21100	17.24			
				2562.5	21375	17.44		3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
15				2507.5	20825	17.45			
			0	2535	21100	17.43	17.5		
				2562.5	21375	17.39	17.5		
				2507.5	20825	17.42	17.5	 	
İ		1 RB	36	2535	21100	17.44	17.5	Wer + lax. MPR Allowed per 3GPP(dB) Bm) 7.5 7.5 0 <t< td=""></t<>	
İ				2562.5	21375	17.47	17.5		
				2507.5	20825	17.39	17.5		
1			74	2535	21100	17.30	17.5	+	
1				2562.5	21375	17.48	17.5		
1				2507.5	20825	17.26	17.5	+	
	16-QAM		0	2535	21100	17.20	17.5	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
				2562.5	21375	17.41	17.5		
				2507.5	20825	17.30	17.5	+	
		36RB	18	2535	21100	17.25	17.5	+	
				2562.5	21375	17.46	17.5	+	
				2507.5	20825	17.45	17.5		
			37	2535	21100	17.33	17.5		
				2562.5	21375	17.44	17.5		
				2507.5	20825	17.33	17.5		
		75RB		2535	21100	17.33	17.5		
				2562.5	21375	17.46	17.5	+	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 82 of 328

				FDD Band 7						
				, DD Danu 7			Torest			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				2505	20800	17.19	17.5	0		
			0	2535	21100	17.15	17.5	0		
				2565	21400	17.44	17.5	0		
				2505	20800	17.30	17.5	0		
		1 RB	25	2535	21100	17.32	17.5	0		
				2565	21400	17.47	17.5	0		
				2505	20800	17.39	17.5	0		
			49	2535	21100	17.39	17.5	0		
				2565	21400	17.48	17.5	0		
				2505	20800	17.21	17.5	0		
	QPSK		0	2535	21100	17.29	17.5	0		
				2565	21400	17.41	17.5	0		
				2505	20800	0 17.27 17.5	0			
		25RB	12	2535	21100	17.28	17.5	0		
				2565	21400	17.46	17.5	0		
				2505	20800	17.31	17.5			
			25	2535	21100	17.27	17.5			
				2565	21400	17.46	17.5	0		
				2505	20800	17.26	17.5	0		
		50	RB	2535	21100	17.28	17.5	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
10				2565	21400	17.48	17.5	0		
10				2505	20800	17.24	17.5	0		
			0	2535	21100	16.89	17.5	0		
				2565	21400	17.45	17.5	0		
				2505	20800	17.04	17.5	0		
		1 RB	25	2535	21100	21100 16.89 17.5 21400 17.45 17.5 20800 17.04 17.5	0			
				2565	21400	17.48	17.5	0		
				2505	20800	17.21	17.5	0		
			49	2535	21100	17.10	17.5			
				2565	21400	17.17	17.5	0		
				2505	20800	17.34	17.5			
	16-QAM		0	2535	21100	17.35	17.5	0		
				2565	21400	16.91	17.5	0		
				2505	20800	17.36	17.5	0		
		25RB	12	2535	21100	17.34	17.5	0		
				2565	21400	16.84	17.5	0		
				2505	20800	17.38	17.5	0		
			25	2535	21100	17.43	17.5	0		
				2565	21400	16.91	17.5	0		
		5055		2505	20800	17.35	17.5	0		
		50	RB	2535	21100	17.39	17.5	0		
				2565	21400	16.85	17.5	0		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 83 of 328

				FDD Band 7						
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				2502.5	20775	17.23	17.5	0		
			0	2535	21100	17.23	17.5	0		
				2567.5	21425	17.46	17.5	0		
				2502.5	20775	17.20	17.5	0		
		1 RB	12	2535	21100	17.11	17.5	0		
				2567.5	21425	17.40	17.5	0		
				2502.5	20775	17.26	17.5	0		
			24	2535	21100	17.25	17.5	0		
				2567.5	21425	17.03	17.5	0		
				2502.5	20775	17.19	17.5	0		
	QPSK		0	2535	21100	17.22	17.5	0		
				2567.5	21425	17.41	17.5	0		
				2502.5	20775	17.25	Power + Max. Tolerance (dBm) MPR Allowed per 3GPP(dB) 17.23 17.5 0 17.46 17.5 0 17.20 17.5 0 17.40 17.5 0 17.26 17.5 0 17.27 0 0 17.28 0 0 17.29 17.5 0 17.25 17.5 0 17.03 17.5 0 17.19 17.5 0 17.21 17.5 0 17.19 17.5 0 17.41 17.5 0			
		12RB	6	2535	21100	17.22	17.5	0		
				2567.5	21425	17.40	17.5	0		
				2502.5	20775	17.26	17.5	5 0 5 0 5 0 5 0 5 0 5 0 5 0 5 0		
			13	2535	21100	17.21	17.5			
				2567.5	21425	17.46	17.5	0		
				2502.5	20775			0		
		25	RB	2535	21100					
5				2567.5	21425					
				2502.5	20775					
			0	2535	21100					
				2567.5	21425					
				2502.5	20775					
		1 RB	12	2535	21100			ł		
				2567.5	21425					
				2502.5	20775					
			24	2535	21100					
				2567.5	21425			ł		
	40.0444			2502.5	20775					
	16-QAM		0	2535	21100	1				
				2567.5	21425					
		4000		2502.5	20775					
		12RB	6	2535	21100					
				2567.5	21425					
			40	2502.5	20775					
			13	2535	21100					
	25F			2567.5	21425					
		25RB		2502.5	20775					
		KΩ	2535	21100	17.24	17.5	0			
				2567.5	21425	17.45	17.5	0		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 84 of 328

				FDD Band 12				
				. JD Dana 12			Target	
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				704	23060	18.99	19.5	0
			0	707.5	23095	19.18	19.5	0
				711	23130	19.25	19.5	0
				704	23060	19.32	19.5	0
		1 RB	25	707.5	23095	19.29	19.5	0
				711	23130	19.17	19.5	0
				704	23060	19.24	19.5	0
			49	707.5		19.49	19.5	0
				711		19.20	19.5	0
				704				_
	QPSK		0	707.5				
				711	23095 19.29 19.5 23130 19.17 19.5 23060 19.24 19.5 23095 19.49 19.5	ł — — — — — — — — — — — — — — — — — — —		
		0555		704				
		25RB	12	707.5			19.5	
				711				## MPR Allowed per 3GPP(dB) O
				704				
			25	707.5				
				711				
		50	DD	704				ł
		50	RB	707.5				
10			I	711				
			0	704 707.5				
				707.5				Allowed per 3GPP(dB) O O O O O O O O O O O O O O O O O O
				711		1		
		1 RB	25	707.5	23095			
		TILD	25	707.3	23130			ł
				704	23060	1		
			49	707.5	23095			
				711	23130		19.18 19.5 19.25 19.5 19.32 19.5 19.29 19.5 19.17 19.5 19.24 19.5 19.29 19.5 19.20 19.5 19.18 19.5 19.13 19.5 19.15 19.5 19.07 19.5 19.08 19.5 19.06 19.5 19.07 19.5 19.16 19.5 19.17 19.5 19.15 19.5 19.17 19.5 19.04 19.5 19.29 19.5	
				704	23060			ł
	16-QAM		0	707.5	23095			
				711	23130	1		
				704	23060			
		25RB	12	707.5	23095			
				711	23130			
				704	23060			0
			25	707.5	23095			
				711	23130			
			•	704	23060	19.04	19.5	0
		50	RB	707.5	23095	18.90	19.5	0
	301		711	23130	18.91	19.5	0	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 85 of 328

				FDD Band 12						
				. 35 Bana 12			Torgot			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				701.5	23035	18.68	19.5	0		
			0	707.5	23095	18.93	19.5	0		
				713.5	23155	18.81	19.5	0		
				701.5	23035	18.86	19.5	0		
		1 RB	12	707.5	23095	18.71	19.5	0		
				713.5	23155	18.89	19.5	0		
				701.5	23035	18.96	19.5	0		
			24	707.5	23095	18.80	19.5	0		
				713.5	23155	18.75	19.5	0		
				701.5	23035	18.57	19.5	0		
	QPSK		0	707.5	23095	18.69	19.5	0		
				713.5	23155	18.77	19.5	0		
				701.5	23035	18.73	19.5	0		
		12RB	6	707.5	23095	18.71	19.5	+ MPR Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
				713.5	23155	18.82	19.5			
				701.5	23035	18.82	19.5			
			13	707.5	23095	18.76	19.5			
				713.5	23155	18.82	19.5	0		
				701.5	23035	18.87	19.5	0		
		25	RB	707.5	23095	18.74	19.5			
5				713.5	23155	18.70	19.5			
			0	701.5	23035	19.13	19.5			
			0	707.5	23095	18.88	19.5			
				713.5	23155	19.45	19.5			
				701.5	23035	19.27	19.5	Allowed per 3GPP(dB) O O O O O O O O O O O O O O O O O O		
		1 RB	12	707.5	23095	19.34	19.5			
				713.5	23155	19.08	19.5			
				701.5	23035	19.44	19.5			
			24	707.5	23095	19.07	19.5			
				713.5	23155	19.48	19.5			
	40.0444			701.5	23035	18.67	19.5			
	16-QAM		0	707.5	23095	18.74	19.5	-		
				713.5	23155	18.75	19.5			
		4055		701.5	23035	18.83	19.5			
		12RB	6	707.5	23095	18.75	19.5			
				713.5	23155	18.81	19.5			
			40	701.5	23035	18.84	19.5			
			13	707.5	23095	18.80	19.5			
				713.5	23155	18.60	19.5			
		0.5	DD	701.5	23035	18.83	19.5			
	25R		KR	707.5	23095	18.81	19.5			
				713.5	23155	18.70	19.5	0		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 86 of 328

				FDD Band 12						
				. 35 Bana 12			Target			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				700.5	23025	18.80	19.5	0		
			0	707.5	23095	18.82	19.5	0		
				714.5	23165	18.74	19.5	0		
				700.5	23025	18.74	19.5	0		
		1 RB	7	707.5	23095	18.89	19.5	0		
				714.5	23165	18.89	19.5	0		
				700.5	23025	18.74	19.5	0		
			14	707.5	23095	18.70	19.5	0		
				714.5	23165	18.73	19.5	0		
				700.5	23025	18.72	19.5	0		
	QPSK		0	707.5	23095	18.70	19.5	0		
				714.5	23165	18.67	19.5	0		
				700.5	23025	18.84	19.5	0		
		8RB	4	707.5	23095	18.73	19.5	r + MPR Allowed per 3GPP(dB) 6		
				714.5	23165	18.73	19.5			
				700.5	23025	18.81	19.5			
			7	707.5	23095	18.78	19.5			
				714.5	23165	18.69	19.5	0		
				700.5	23025	18.58	19.5	0		
		15	RB	707.5	23095	18.83	19.5			
3				714.5	23165	18.74	19.5	0		
			_	700.5	23025	19.07	19.5	0		
			0	707.5	23095	19.05	19.5	0		
				714.5	23165	19.27	19.5	0		
				700.5	23025	18.73	19.5	0		
		1 RB	7	707.5	23095	18.88	19.5	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
				714.5	23165	19.09	19.5	0		
				700.5	23025	19.29	19.5	0		
			14	707.5	23095	19.26	19.5			
				714.5	23165	18.89	19.5	0		
				700.5	23025	18.76	19.5			
	16-QAM		0	707.5	23095	18.80	19.5	-		
				714.5	23165	18.79	19.5			
				700.5	23025	18.87	19.5			
		8RB	4	707.5	23095	18.60	19.5			
				714.5	23165	18.74	19.5			
				700.5	23025	18.84	19.5			
			7	707.5	23095	18.79	19.5			
				714.5	23165	18.58	19.5			
				700.5	23025	18.80	19.5			
	15R		RB	707.5	23095	18.88	19.5			
				714.5	23165	18.71	19.5	0		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 87 of 328

				FDD Band 12						
				. DD Dana 12			Torest			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				699.7	23017	18.84	19.5	0		
			0	707.5	23095	18.87	19.5	0		
				715.3	23173	18.93	19.5	0		
				699.7	23017	18.91	19.5	0		
		1 RB	2	707.5	23095	18.96	19.5	0		
				715.3	23173	18.67	19.5	0		
				699.7	23017	18.93	19.5	0		
			5	707.5	23095	18.84	19.5	0		
				715.3	23173	18.85	19.5	0		
				699.7	23017	18.83	19.5	0		
	QPSK		0	707.5	23095	18.79	19.5	0		
				715.3	23173	18.60	19.5	0		
				699.7	23017	18.75	19.5	0		
		3RB	2	707.5	23095	18.75	19.5	Allowed per 3GPP(dB) O O O O O O O O O O O O O O O O O O		
				715.3	23173	18.70	19.5			
				699.7	23017	18.78	19.5			
			3	707.5	23095	18.76	19.5			
				715.3	23173	18.83	19.5	0		
				699.7	23017	18.80	19.5	0		
		6F	RB	707.5	23095	18.77	19.5	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
1.4				715.3	23173	18.77	19.5	0		
				699.7	23017	19.19	19.5	0		
			0	707.5	23095	19.22	19.5			
				715.3	23173	19.10	19.5			
				699.7	23017	19.47	19.5	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
		1 RB	2	707.5	23095	19.08	19.5			
				715.3	23173	19.12	19.5	Allowed per 3GPP(dB) O O O O O O O O O O O O O O O O O O O		
			_	699.7	23017	19.32	19.5			
			5	707.5	23095	19.37	19.5			
				715.3	23173	19.36	19.5			
	40.0444			699.7	23017	18.87	19.5			
	16-QAM		0	707.5	23095	18.87	19.5	-		
				715.3	23173	18.50	19.5			
		000		699.7	23017	18.78	19.5			
		3RB	2	707.5	23095	18.98	19.5			
				715.3	23173	19.03	19.5			
			_	699.7	23017	19.03	19.5			
			3	707.5	23095	19.03	19.5			
				715.3	23173	18.92	19.5			
		25	D	699.7	23017	18.82	19.5	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
	6RE		KR	707.5	23095	18.74	19.5			
				715.3	23173	18.78	19.5	0		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 88 of 328

				FDD Band 13				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
			0	782	23230	20.47	20.5	0
		1 RB	25	782	23230	20.48	20.5	0
			49	782	23230	20.46	20.5	0
	QPSK		0	782	23230	20.17	20.5	0
		25 RB	12	782	23230	19.92	20.5	0
			25	782	23230	19.94	20.5	0
10		50	RB	782	23230	19.94	20.5	0
10			0	782	23230	20.00	20.5	0
		1 RB	25	782	23230	19.89	20.5	0
			49	782	23230	20.16	20.5	0
	16-QAM		0	782	23230	19.91	20.5	0
		25 RB	12	782	23230	19.91	20.5	0
			25	782	23230	19.90	20.5	0
		50	RB	782	23230	20.02	20.5	0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 89 of 328

				FDD Band 13				
				. 35 5414 10			Torgot	
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				779.5	23205	19.82	20.5	0
			0	782	23230	19.72	20.5	0
				784.5	23255	19.62	20.5	0
				779.5	23205	19.64	20.5	0
		1 RB	12	782	23230	19.65	20.5	0
				784.5	23255	19.49	20.5	0
				779.5	23205	19.76	20.5	0
			24	782	23230	19.71	20.5	0
				784.5	23255	19.70	20.5	0
				779.5	23205	19.64	20.5	0
	QPSK		0	782	23230	19.52	20.5	0
				784.5	23255	19.58	20.5	0
				779.5	23205	19.42	20.5	0
		12RB	6	782	23230	19.58	20.5	Allowed per 3GPP(dB) O O O O O O O O O O O O O O O O O O
				784.5	23255	19.69	20.5	
				779.5	23205	19.58	20.5	
			13	782	23230	19.60	20.5	
				784.5	23255	19.61	20.5	0
				779.5	23205	19.77	20.5	0
		25	RB	782	23230	19.64	20.5	0
5				784.5	23255	19.69	20.5	0
				779.5	23205	20.06	20.5	0
			0	782	23230	19.97	20.5	0
				784.5	23255	19.82	20.5	0
				779.5	23205	20.11	20.5	Allowed per 3GPP(dB) O O O O O O O O O O O O O O O O O O
		1 RB	12	782	23230	19.95	20.5	0
				784.5	23255	20.07	20.5	
				779.5	23205	20.33	20.5	0
			24	782	23230	19.83	20.5	
				784.5	23255	20.18	20.5	
	40.0			779.5	23205	19.65	20.5	
	16-QAM		0	782	23230	19.78	20.5	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
				784.5	23255	19.77	20.5	
		4055		779.5	23205	19.77	20.5	
		12RB	6	782	23230	19.69	20.5	
				784.5	23255	19.82	20.5	
			40	779.5	23205	19.67	20.5	
			13	782	23230	19.72	20.5	
				784.5	23255	19.72	20.5	
	25R		DD	779.5	23205	19.66	20.5	
		KR	782	23230	19.66	20.5		
				784.5	23255	19.73	20.5	0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 90 of 328

				FDD Band 17						
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency	Channel	Conducted	Target Power + Max.	MPR Allowed per		
,				(MHz)		power (dBm)	Tolerance (dBm)	3GPP(dB)		
				709	23780	19.14	19.5	0		
			0	710	23790	19.27	19.5	0		
				711	23800	18.91	19.5	0		
				709	23780	19.25	19.5	0		
		1 RB	25	710	23790	19.11	19.5	0		
				711	23800	19.16	19.5	0		
				709	23780	19.34	19.5			
			49	710	23790	19.29	19.5	ł — — — — — — — — — — — — — — — — — — —		
				711	23800	19.48	19.5			
				709	23780	19.13	19.5			
	QPSK		0	710	23790	19.16	19.5			
				711	23800	19.21	19.5	ł — — — — — — — — — — — — — — — — — — —		
				709	23780	19.22	19.5			
		25RB	12	710	23790	19.19	19.5	Allowed per 3GPP(dB) O O O O O O O O O O O O O O O O O O		
				711	23800	19.08	19.5			
			0.5	709	23780	19.34	19.5			
			25	710	23790	19.35	19.5			
				711	23800	19.30	19.5			
				709	23780	19.28	19.5			
		50	RB	710	23790	19.28	19.5			
10			1	711	23800	19.35	19.5			
			0	709	23780	18.86	19.5			
			Ü	710	23790	19.14	19.5			
				711	23800	19.22	19.5			
		4 DD	25	709	23780	19.38	19.5	Allowed per 3GPP(dB) O O O O O O O O O O O O O O O O O O		
		1 RB	25	710	23790	19.12	19.5	ł		
				711	23800	19.45	19.5			
			40	709	23780	19.24	19.5			
			49	710	23790	19.16	19.5			
				711	23800	18.85	19.5			
	16-QAM		0	709	23780 23790	18.87	19.5			
	10-QAW		U	710 711		18.89	19.5			
				711	23800	18.80	19.5			
		25RB	12	709 710	23780	18.88	19.5			
		ZUND	12	710 711	23790	18.76	19.5			
				711 709	23800 23780	18.90 18.94	19.5 19.5			
			25	709	23780	18.94	19.5			
			25	710	23790	18.85	19.5			
				709	23780	19.03	19.5			
		50	RB	710	23790	18.86	19.5			
	50R		710	23800	18.98	19.5				
				/ 1 1	23000	10.90	19.5	U		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 91 of 328

				FDD Band 17						
				. 35 5414 17			Target			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				706.5	23755	18.77	19.5	0		
			0	710	23790	18.74	19.5	0		
				713.5	23825	18.78	19.5	0		
				706.5	23755	18.80	19.5	0		
		1 RB	12	710	23790	18.70	19.5	0		
				713.5	23825	18.79	19.5	0		
				706.5	23755	18.90	19.5	0		
			24	710	23790	18.88	19.5	0		
				713.5	23825	18.90	19.5	0		
				706.5	23755	18.74	19.5	0		
	QPSK		0	710	23790	18.75	19.5	0		
				713.5	23825	18.75	19.5	0		
				706.5	23755	18.70	19.5	0		
		12RB	6	710	23790	18.64	19.5	+ MPR Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
				713.5	23825	18.71	19.5			
				706.5	23755	18.75	19.5			
			13	710	23790	18.81	19.5			
				713.5	23825	18.69	19.5	0		
				706.5	23755	18.73	19.5	0		
		25	RB	710	23790	18.79	19.5	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
5				713.5	23825	18.78	19.5	0		
				706.5	23755	19.11	19.5			
			0	710	23790	19.08	19.5			
				713.5	23825	19.17	19.5			
				706.5	23755	19.47	19.5			
		1 RB	12	710	23790	19.18	19.5			
				713.5	23825	19.08	19.5			
				706.5	23755	19.43	19.5			
			24	710	23790	18.59	19.5			
				713.5	23825	19.29	19.5			
	40.0444			706.5	23755	18.97	19.5			
	16-QAM		0	710	23790	18.97	19.5	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
				713.5	23825	18.76	19.5			
		4055		706.5	23755	18.80	19.5			
		12RB	6	710	23790	18.82	19.5			
				713.5	23825	18.80	19.5			
			40	706.5	23755	18.83	19.5			
			13	710	23790	18.88	19.5			
				713.5	23825	18.61	19.5			
		0.5	DD	706.5	23755	18.86	19.5			
	25R		KR	710	23790	18.72	19.5			
				713.5	23825	18.82	19.5	0		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 92 of 328

				FDD Band 26						
				. 35 Bana 20			Target			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				822.5	26825	20.79	21	0		
			0	831.5	26865	20.75	21	0		
				841.5	26965	20.62	21	0		
				822.5	26825	20.83	21	0		
		1 RB	36	831.5	26865	20.70	21	0		
				841.5	26965	20.57	21	0		
				822.5	26825	20.64	21	0		
			74	831.5	26865	20.77	21	0		
				841.5	26965	20.83	21	0		
				822.5	26825	20.97	21	0		
	QPSK		0	831.5	26865	20.81	21	0		
				841.5	26965	20.59	21	0		
				822.5	26825	20.84	21	0		
		36RB	18	831.5	26865	20.72	21	+ MPR Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
				841.5	26965	20.67	21			
				822.5	26825	20.85	21			
			37	831.5	26865	20.71	21			
				841.5	26965	20.64	21	0		
				822.5	26825	20.97	21	0		
		75	RB	831.5	26865	20.90	21			
15				841.5	26965	20.85	21	0		
			0	822.5	26825	20.88	21			
				831.5	26865	20.81	21			
				841.5	26965	20.82	21			
				822.5	26825	20.78	21	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
		1 RB	36	831.5	26865	20.72	21			
				841.5	26965	20.96	21			
				822.5	26825	20.71	21			
			74	831.5	26865	20.91	21			
				841.5	26965	20.81	21			
	40.0444			822.5	26825	20.89	21			
	16-QAM		0	831.5	26865	20.85	21	-		
				841.5	26965	20.79	21			
		0055	40	822.5	26825	20.89	21			
		36RB	18	831.5	26865	20.81	21			
				841.5	26965	20.80	21			
			27	822.5	26825	20.95	21			
			37	831.5	26865	20.74	21			
				841.5	26965	20.74	21			
		7533		822.5	26825	20.61	21			
	75R	KR	831.5	26865	20.91	21				
				841.5	26965	20.91	21	0		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 93 of 328

	FDD Band 26											
				. 35 5414 20			Target					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				820	26750	20.81	21	0				
			0	831.5	26865	20.76	21	0				
				844	26990	20.74	21	0				
				820	26750	20.64	21	0				
		1 RB	25	831.5	26865	20.73	21	0				
				844	26990	20.56	21	0				
				820	26750	20.86	21	0				
			49	831.5	26865	20.75	21	0				
				844	26990	20.88	21	0				
				820	26750	20.85	21					
	QPSK		0	831.5	26865	20.85	21					
				844	26990	20.49	21	•				
				820	26750	20.82	21					
		25RB	12	831.5	26865	20.70	21					
				844	26990	20.55	21	+ MPR Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				820	26750	20.84	21					
			25	831.5	26865	20.72	21					
				844	26990	20.64	21					
		50		820	26750	20.93	21					
		50	RB	831.5	26865	20.70	21	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
10				844	26990	20.78	21					
			820 26750 20.79 21 0 831.5 26865 20.66 21									
			U									
				844	26990	20.37	21					
		1 RB	25	820	26750	20.66	21	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
		I IZD	25	831.5	26865	20.68	21					
				844 820	26990 26750	20.58 20.77	21 21					
			49			20.77	21					
			49	831.5 844	26865 26990		21					
				820	26750	20.94 20.89	21					
	16-QAM		0	831.5	26865	20.89	21					
	10 SCAINI			844	26990	20.68	21	-				
				820	26750	20.00	21					
		25RB	12	831.5	26865	20.87	21					
		20110	12	844	26990	20.59	21					
				820	26750	20.91	21					
			25	831.5	26865	20.80	21					
				844	26990	20.83	21					
				820	26750	20.95	21					
		50	RB	831.5	26865	20.80	21					
		501		844	26990	20.75	21					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 94 of 328

				FDD Band 26					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				816.5	26715	20.76	21	0	
			0	831.5	26865	20.73	21	0	
				846.5	27015	20.56	21	0	
				816.5	26715	20.70	21	0	
		1 RB	12	831.5	26865	20.71	21	0	
				846.5	27015	20.62	21	0	
				816.5	26715	20.86	21	0	
			24	831.5	26865	20.75	21	0	
				846.5	27015	20.71	21	0	
				816.5	26715	20.77	21	0	
	QPSK		0	831.5	26865	20.72	21	0	
				846.5	27015	20.66	21	0	
				816.5	26715	20.87	21	0	
		12RB	6	831.5	26865	20.60	21	er + x. Allowed per ance ance ance m) Allowed per 3GPP(dB) O O O O O O O O O O O O O	
				846.5	27015	20.51	21		
				816.5	26715	20.82	21		
			13	831.5	26865	20.62	21		
				846.5	27015	20.75	21	0	
				816.5	26715	20.80	21	0	
		25	RB	831.5	26865	20.60	21	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
5				846.5	27015	20.67	21	0	
5				816.5	26715	20.59	21	0	
			0	831.5	26865	20.84	21	0	
				846.5	27015	20.20	21	0	
				816.5	26715	20.41	21	0	
		1 RB	12	831.5	26865	20.74	21	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
				846.5	27015	20.16	21		
				816.5	26715	20.73	21	0	
			24	831.5	26865	20.81	21	0	
				846.5	27015	20.90	21	0	
				816.5	26715	20.81	21	0	
	16-QAM		0	831.5	26865	20.84	21	Allowed per 3GPP(dB) O O O O O O O O O O O O O O O O O O	
				846.5	27015	20.55	21	0	
				816.5	26715	20.94	21	0	
		12RB	6	831.5	26865	20.61	21	0	
				846.5	27015	20.58	21	0	
				816.5	26715	20.89	21	0	
			13	831.5	26865	20.70	21	0	
				846.5	27015	20.73	21	0	
				816.5	26715	20.83	21	0	
	25F	RB	831.5	26865	20.74	21	0		
				846.5	27015	20.58	21	0	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 95 of 328

				FDD Band 26					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)	
				815.5	26705	20.68	(dBm) 21	0	
			0	831.5	26865	20.78	21		
			Ü	847.5	27025	20.66	21		
				815.5	26705	20.82	21		
		1 RB	7	831.5	26865	20.65	21		
				847.5	27025	20.83	21		
				815.5	26705	20.84	21		
			14	831.5	26865	20.62	21		
				847.5	27025	20.68	21		
				815.5	26705	20.72	21	0	
	QPSK		0	831.5	26865	20.75	21		
				847.5	27025	20.53	21		
				815.5	26705	20.79	21		
		8RB	4	831.5	26865	20.66	21	0	
				847.5	27025	20.63	21	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
				815.5	26705	20.80	21		
			7	831.5	26865	20.62	21		
				847.5	27025	20.69	21	0	
				815.5	26705	20.79	21	0	
		15	RB	831.5	26865	20.70	21	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
				847.5	27025	20.72	21	0	
3				815.5	26705	20.89	21	0	
			0	831.5	26865	20.69	21	0	
				847.5	27025	20.59	21	0	
				815.5	26705	20.87	21	Allowed per 3GPP(dB) O O O O O O O O O O O O O O O O O O	
		1 RB	7	831.5	26865	20.69	21		
				847.5	27025	20.60	21	0	
				815.5	26705	20.84	21	0	
			14	831.5	26865	20.45	21	0	
				847.5	27025	20.70	21	0	
				815.5	26705	20.65	21	0	
	16-QAM		0	831.5	26865	20.84	21	0	
				847.5	27025	20.75	21	0	
				815.5	26705	20.84	21	0	
		8RB	4	831.5	26865	20.55	21		
				847.5	27025	20.62	21	0	
				815.5	26705	20.96	21		
			7	831.5	26865	20.66	21		
				847.5	27025	20.93	21		
				815.5	26705	20.82	21		
	1	15	RB	831.5	26865	20.68	21		
				847.5	27025	20.66	21	0	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 96 of 328

				FDD Band 26						
				. 35 Bana 20			Target			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				814.7	26697	20.79	21	0		
			0	831.5	26865	20.69	21	0		
				848.3	27033	20.73	21	0		
				814.7	26697	20.78	21	0		
		1 RB	2	831.5	26865	20.71	21	0		
				848.3	27033	20.76	21	0		
				814.7	26697	20.76	21	0		
			5	831.5	26865	20.70	21	0		
				848.3	27033	20.67	21	0		
				814.7	26697	20.71	21	0		
	QPSK		0	831.5	26865	20.67	21	0		
				848.3	27033	20.70	21	0		
				814.7	26697	20.76	21	0		
		3RB	2	831.5	26865	20.59	21	## MPR Allowed per 3GPP(dB) 0		
				848.3	27033	20.63	21			
				814.7	26697	20.79	21			
			3	831.5	26865	20.73	21			
				848.3	27033	20.74	21	0		
				814.7	26697	20.75	21	0		
		6F	RB	831.5	26865	20.67	21	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
1.4				848.3	27033	20.73	21			
				814.7	26697	20.48	21			
			0	831.5	26865	20.19	21			
				848.3	27033	20.43	21			
				814.7	26697	20.32	21			
		1 RB	2	831.5	26865	20.09	21			
				848.3	27033	20.88	21			
			_	814.7	26697	20.23	21			
			5	831.5	26865	20.41	21			
				848.3	27033	20.74	21			
	16 0 4 14		_	814.7	26697	20.31	21			
	16-QAM		0	831.5	26865	20.17	21	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
				848.3	27033	20.17	21			
		200	_	814.7	26697	20.32	21			
		3RB	2	831.5	26865	20.76	21			
				848.3	27033	20.80	21			
			2	814.7	26697	20.77	21			
			3	831.5	26865	20.65	21			
				848.3	27033	20.73	21			
		61	DR.	814.7	26697	20.90	21	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
	6RI		\D	831.5	26865	20.88	21			
				848.3	27033	20.68	21	U		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 97 of 328

				FDD Band 30				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
			0	2310	27710	16.79	17	0
		1 RB	25	2310	27710	16.64	17	0
			49	2310	27710	16.63	17	0
	QPSK		0	2310	27710	16.83	17	0
		25 RB	12	2310	27710	16.79	17	0
			25	2310	27710	16.65	17	0
10		50RB		2310	27710	16.96	17	0
10			0	2310	27710	16.81	17	0
		1 RB	25	2310	27710	16.80	17	0
			49	2310	27710	16.83	17	0
	16-QAM		0	2310	27710	16.66	17	0
		25 RB	12	2310	27710	16.55	17	0
			25	2310	27710	16.45	17	0
		50	RB	2310	27710	16.89	17	0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 98 of 328

				FDD Band 30						
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)		
				2307.5	27685	16.45	` '	0		
			0	2310				•		
			Ü	2312.5	27735			•		
				2307.5	27685					
		1 RB	12	2310	27710			_		
				2312.5	27735					
				2307.5	27685					
			24	2310	27710					
				2312.5	27735					
				2307.5	27685			0		
	QPSK		0	2310	27710					
				2312.5	27735					
				2307.5	27685			•		
		12RB	6	2310	27710		17	ower + MPR Allowed per 3GPP(dB) 17 0 17 0 17 0 17 0 17 0 17 0 17 0 17		
				2312.5	27735	16.35				
				2307.5	27685	16.28	17			
			13	2310	27710	16.52	17			
				2312.5	27735	16.31	17	0		
				2307.5	27685	16.49	17	0		
		25	RB	2310	27710	16.34	17	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
5				2312.5	27735	16.32	17	0		
5				2307.5	27685	16.35	17	0		
			0	2310	27710	16.71	17	0		
				2312.5	27735	16.55	17	0		
				2307.5	27685	16.93	17	0		
		1 RB	12	2310	27710	16.39	17	0		
				2312.5	27735	7710 16.37 17 0 7735 16.39 17 0 7685 16.36 17 0 7735 16.06 17 0 7735 16.06 17 0 7685 16.57 17 0 7710 16.35 17 0 7735 16.20 17 0 7735 16.31 17 0 7735 16.45 17 0 7735 16.45 17 0 7735 16.37 17 0 7735 16.35 17 0 7735 16.32 17 0 7735 16.35 17 0 7735 16.31 17 0 7735 16.32 17 0 7735 16.34 17 0 7735 16.31 17 0 7735 16.34 17 0	0			
				2307.5	27685	16.70	17	0		
			24	2310	27710	16.19	17	0		
				2312.5	27735	16.35	17	0		
				2307.5	27685	16.63	17	0		
	16-QAM		0	2310	27710	16.55	17	0		
				2312.5	27735	16.53	17	0		
				2307.5	27685		17	0		
		12RB	6	2310	27710					
				2312.5	27735					
				2307.5	27685					
			13	2310	27710					
				2312.5	27735					
				2307.5	27685					
	25R		RB	2310	27710	1				
				2312.5	27735	16.25	17	0		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 99 of 328

				FDD Band 38						
				. 55 Bana 00			Target	MDD		
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Max. Tolerance (dBm)	Allowed per 3GPP(dB)		
				2580	37850	19.96	20	0		
			0	2595	38000	19.72	20	0		
				2610	38150	19.91	20	0		
				2580	37850	19.89	20	0		
		1 RB	50	2595	38000	19.83	20	0		
				2610	38150	19.86	20	0		
				2580	37850	19.91	20	0		
			99	2595	38000		20	0		
				2610	38150	1	20	0		
				2580						
	QPSK		0	2595						
				2610		Channel Conducted power (dBm) Power + Max. Tolerance (dBm) MPR Allowed per 3GPP(dB) 37850 19.96 20 0 38000 19.72 20 0 38150 19.91 20 0 37850 19.89 20 0 38000 19.83 20 0 38150 19.86 20 0 37850 19.91 20 0 38000 19.87 20 0				
				2580						
		50RB	25	2595		1		20		
				2610						
				2580						
			50	2595						
				2610						
				2580				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
		100)RB	2595						
20				2610						
			0	2580						
				2595						
				2610						
		4 DD	50	2580						
		1 RB	50	2595						
				2610		1				
			00	2580		+				
			99	2595						
				2610		19.72 20 0 19.81 20 0 19.83 20 0 19.86 20 0 19.87 20 0 19.87 20 0 19.83 20 0 19.77 20 0 19.78 20 0 19.79 20 0 19.70 20 0 19.76 20 0 19.79 20 0 19.70 20 0 19.71 20 0 19.72 20 0 19.73 20 0 19.74 20 0 19.75 20 0 19.78 20 0 19.78 20 0 19.79 0 0 19.79 0 0 19.79 0 0 19.79 0 0 19.79 0 0 19.79 0 0				
	16-QAM		0	2580 2505						
	10-QAW		U	2595		+				
				2610 2580						
		50RB	25	2580 2595						
		סאטט	25	2610				20 0 0 20 0 20 0 20 0 20 0 20 0 20 0 2		
				2580						
			50	2595						
			30	2610						
				2580						
		100)RB	2595				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
		100		2610		1				
				2010	30130	18.70	20	U		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 100 of 328

				FDD Band 38					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				2577.5	37825	19.93	20	0	
			0	2595	38000	19.87	20	0	
				2612.5	38175	19.88	20	0	
				2577.5	37825	19.87	20	0	
		1 RB	36	2595	38000	19.88	20	0	
				2612.5	38175	19.90	20	0	
				2577.5	37825	19.82	20	0	
			74	2595	38000	19.89	20	0	
				2612.5	38175	19.88	20	0	
				2577.5	37825	19.91	20	0	
	QPSK		0	2595	38000	19.84	20	0	
				2612.5	38175	19.83	20	0	
				2577.5	37825	19.85	20	0	
		36RB	18	2595	38000	19.89	20	+ MPR Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
				2612.5	38175	19.83	20		
				2577.5	37825	19.85	20		
			37	2595	38000	19.81	20	0	
				2612.5	38175	19.82	20	0	
				2577.5	37825	19.79	20	0	
		75	RB	2595	38000	19.80	20	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
45				2612.5	38175	19.81	20	0	
15				2577.5	37825	19.79	20	0	
			0	2595	38000	19.84	20	0	
				2612.5	38175	19.87	20	0	
				2577.5	37825	19.83	20	0	
		1 RB	36	2595	38000	19.88	20	0	
				2612.5	38175	19.87	20	0	
				2577.5	37825	19.75	20	0	
			74	2595	38000	19.86	20	0	
				2612.5	38175	19.87	20	0	
				2577.5	37825	19.85	20	0	
	16-QAM		0	2595	38000	19.88	20	0	
				2612.5	38175	19.87	20	0	
				2577.5	37825	19.84	20	0	
		36RB	18	2595	38000	19.87	20	0	
				2612.5	38175	19.87	20	0 0 0 0 0 0 0 0 0 0 0 0 0 0	
				2577.5	37825	19.82	20	0	
			37	2595	38000	19.86	20	0	
				2612.5	38175	19.86	20	0	
				2577.5	37825	19.81	20	0	
		75	RB	2595	38000	19.87	20	0	
				2612.5	38175	19.85	20	0	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 101 of 328

				FDD Band 38						
				. 55 Bana 00			Target	MDD		
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Max. Tolerance (dBm)	Allowed per 3GPP(dB)		
				2575	37800	19.93	20	0		
			0	2595	38000	19.95	20	0		
				2615	38200	19.94	20	0		
				2575	37800	19.87	20	0		
		1 RB	25	2595	38000	19.92	20	0		
				2615	38200	19.92	20	0		
				2575	37800	19.88	20	0		
			49	2595	38000	19.86	20	0		
				2615	38200	19.85	20	0		
				2575	37800	19.83	20	0		
	QPSK		0	2595	38000		20	0		
				2615	38200		20	0		
				2575	37800	Conducted power (dBm) Power + Max. Tolerance (dBm) MPR Allowed per 3GPP(dB) 19.93 20 0 19.95 20 0 19.94 20 0 19.87 20 0 19.92 20 0 19.92 20 0 19.88 20 0 19.86 20 0 19.83 20 0 19.86 20 0 19.86 20 0 19.86 20 0 19.86 20 0				
		25RB	12	2595	38000					
				2615	38200			+		
				2575	37800			0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
			25	2595	38000					
				2615	38200					
				2575	37800					
		50	RB	2595	38000					
10				2615	38200					
			0	2575	37800					
				2595	38000					
				2615	38200	1				
		4.00	0.5	2575	37800					
		1 RB	25	2595	38000			ł — — — — — — — — — — — — — — — — — — —		
				2615	38200					
			40	2575	37800					
			49	2595	38000					
				2615	38200					
	16 0 4 14		0	2575	37800					
	16-QAM		0	2595	38000	1				
				2615	38200					
		2500	10	2575	37800					
		25RB	12	2595	38000					
				2615	38200 37800					
			25	2575 2595						
			2ن		38000					
				2615 2575	38200 37800					
		50	RB	2575 2595	38000					
		30	ועט			1				
				2615	38200	19.81	∠0	U		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 102 of 328

				FDD Band 38						
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				2572.5	37775	19.91	20	0		
			0	2595	38000	19.93	20	0		
				2617.5	38225	19.95	20	0		
				2572.5	37775	19.89	20	0		
		1 RB	12	2595	38000	19.90	20	0		
				2617.5	38225	19.94	20	0		
				2572.5	37775	19.91	20	0		
			24	2595	38000	19.92	20	0		
				2617.5	38225	19.95	20	0		
				2572.5	37775	19.87	20	0		
	QPSK		0	2595	38000	19.87	20	0		
				2617.5	38225	19.89	20	0		
				2572.5	37775	19.83	20	0		
		12RB	6	2595	38000	19.84	20	folerance (dBm) 3GPP(dB) 20 0		
				2617.5	38225	19.88	20			
				2572.5	37775	19.85	20			
			13	2595	38000	19.87	20			
				2617.5	38225	19.88	20	0		
				2572.5	37775	19.85				
		25	RB	2595	38000	19.84	20			
5				2617.5	38225	19.88	20	0		
				2572.5	37775	19.94				
			0	2595	38000	19.93				
				2617.5	38225	19.93				
				2572.5	37775	19.90		0		
		1 RB	12	2595	38000	19.89		0		
				2617.5	38225	19.93				
			.	2572.5	37775	19.94				
			24	2595	38000	19.94				
				2617.5	38225	19.94				
				2572.5	37775	19.82				
	16-QAM		0	2595	38000	19.85				
				2617.5	38225	19.86				
		4055		2572.5	37775	19.80	_			
		12RB	6	2595	38000	19.82				
				2617.5	38225	19.84	20			
			40	2572.5	37775	19.82	20	0		
			13	2595	38000	19.85	20	0		
				2617.5	38225	19.88	20	0		
		0.5	DD	2572.5	37775	19.87	20	0		
		25	RB	2595	38000	19.87	20	0		
				2617.5	38225	19.88	20	0		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 103 of 328

					TD	D Band 41									
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(
				2506	39750	18.63	19	0							
				2549.5	40185	18.87	19	0							
			0	2593	40620	18.65	19	0							
				2636.5	41055	18.97	19	0							
				2680	41490	18.62	19 19	0							
				2506 2549.5	39750 40185	18.47 18.89	19	0							
		1 RB	50	2593	40620	18.60	19	0							
				2636.5	41055	18.98	19	0							
				2680	41490	18.37	19	0							
				18.56	19	0									
				2549.5	40185	18.90 19	0								
			99	2593	40620	18.65	19	0							
				2636.5	41055	18.82	19	0							
				2680	41490	18.37	19	0							
				2506	39750	18.46	19	0							
	QPSK			2549.5	40185	18.70	19	0							
	QPSK		0	2593	40620	18.50	19	0							
				2636.5 2680	41055 41490	18.82	19 19	0							
		50 RB		2506	39750	18.24 18.37	19	0							
			50 RB	50 RB	50 RB	50 RB		2549.5	40185	18.76	19	0			
							25	2593	40620	18.51	19	0			
							50 RB	30 KB	1		2636.5	41055	18.85	19	0
									2680	41490	18.26	19	0		
							2506	39750	18.34	19	0				
				2549.5	40185	18.76	19	0							
			50	2593	40620	18.51	19	0							
				2636.5	41055	18.74	19	0							
			2680	41490	18.30	19	0								
			2506	39750	18.46	19	0								
				2549.5	40185	18.76	19	0							
	10	0RB	2593	40620	18.54	19	0								
				2636.5	41055	18.86	19	0							
20				2680	41490	18.34	19	0							
							2506	39750	18.52	19	0				
			0	2549.5	40185	18.81	19	0							
			U	2593 2636.5	40620 41055	18.62 18.91	19 19	0							
				2680	41490	18.33	19	0							
				2506	39750	18.44	19	0							
				2549.5	40185	18.82	19	0							
		1 RB	50	2593	40620	18.55	19	0							
				2636.5	41055	18.84	19	0							
				2680	41490	18.28	19	0							
				2506	39750	18.52	19	0							
				2549.5	40185	18.85	19	0							
			99	2593	40620	18.61	19	0							
				2636.5	41055	18.69	19	0							
				2680	41490	18.28	19	0							
				2506	39750	18.47	19	0							
				2549.5	40185	18.75	19	0							
	16-QAM		0	2593	40620	18.55	19	0							
				2636.5	41055	18.79	19	0							
				2680	41490	18.24	19	0							
				2506 2540.5	39750	18.39	19	0							
		50 RB	25	2549.5	40185 40620	18.80 18.54	19 19	0							
		30 NB	25	2593 2636.5	41055	18.81	19	0							
				2680	41490	18.25	19	0							
			—	2506	39750	18.39	19	0							
				2549.5	40185	18.82	19	0							
			50	2593	40620	18.53	19	0							
]	2636.5	41055	18.79	19	0							
				2680	41490	18.28	19	0							
				2506	39750	18.46	19	0							
				2549.5	40185	18.80	19	0							
		10	0RB	2593	40620	18.57	19	0							
				2636.5	41055	18.83	19	0							
				2680	41490	18.35	19	0							

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. t (886-2) 2299-3279



Page: 104 of 328

					TD	D Band 41												
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(d										
				2503.5	39725	18.56	19	0										
				2548.3	40173	18.78	19	0										
			0	2593	40620	18.58	19	0										
				2637.8	41068	18.89	19	0										
				2682.5	41515	18.32	19 19	0										
				2503.5 2548.3	39725 40173	18.49 18.79	19	0										
		1 RB	36	2593	40620	18.57	19	0										
				2637.8	41068	18.94	19	0										
				2682.5	41515	18.33	19	0										
				2503.5	39725	18.44	18.44 19	0										
				2548.3	40173	18.84	19	0										
			74	2593	40620	18.56	19	0										
				2637.8	41068	18.73	19	0										
				2682.5	41515	18.37	19	0										
				2503.5	39725	18.53	19	0										
	QPSK		_	2548.3	40173	18.77	19	0										
	Qr3N		0	2593 2637.8	40620 41068	18.56 18.86	19 19	0										
				2682.5	41515	18.86	19	0										
		36 RB	—	2503.5	39725	18.48	19	0										
			36 RB	36 RB	36 RB		2548.3	40173	18.77	19	0							
						18	2593	40620	18.57	19	0							
							2637.8	41068	18.91	19	0							
								2682.5	41515	18.29	19	0						
								2503.5	39725	18.44	19	0						
				2548.3	40173	18.82	19	0										
			37	2593	40620	18.57	19	0										
				2637.8	41068	18.83	19	0										
			2682.5	41515	18.31	19	0											
			2503.5	39725	18.45	19	0											
				2548.3	40173	18.73	19	0										
	75	RB	2593	40620	18.55	19	0											
			2637.8	41068	18.86	19	0											
15				2682.5 2503.5	41515 39725	18.30 18.57	19 19	0										
				2548.3	40173	18.80	19	0										
			0	2593	40620	18.59	19	0										
			0	2637.8	41068	18.87	19	0										
				2682.5	41515	18.28	19	0										
				2503.5	39725	18.52	19	0										
				2548.3	40173	18.78	19	0										
		1 RB	36	2593	40620	18.59	19	0										
				2637.8	41068	18.93	19	0										
				2682.5	41515	18.28	19	0										
				2503.5	39725	18.47	19	0										
				2548.3	40173	18.85	19	0										
			74	2593	40620	18.61	19	0										
				2637.8	41068	18.74	19	0										
				2682.5	41515	18.36	19	0										
				2503.5	39725	18.56	19	0										
	16 0 4 4 4		_	2548.3	40173	18.80	19	0										
	16-QAM		0	2593 2637.8	40620 41068	18.61 18.87	19 19	0										
				2637.8 2682.5	41068	18.33	19 19	0										
				2503.5	39725	18.56	19	0										
				2548.3	40173	18.80	19	0										
		36 RB	18	2593	40620	18.61	19	0										
				2637.8	41068	18.96	19	0										
				2682.5	41515	18.32	19	0										
				2503.5	39725	18.45	19	0										
				2548.3	40173	18.86	19	0										
			37	2593	40620	18.60	19	0										
				2637.8	41068	18.82	19	0										
				2682.5	41515	18.34	19	0										
		<u> </u>																
			ļ	2503.5	39725	18.52	19	0										
			<u> </u>	2503.5 2548.3	40173	18.76	19	0										
		75	irb	2503.5														

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 105 of 328

					TD	D Band 41								
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)						
				2501	39700	18.51	19	0						
				2547	40160	18.75	19	0						
			0	2593	40620	18.53	19	0						
				2639	41080	18.90	19	0						
				2685	41540	18.34	19	0						
				2501 2547	39700 40160	18.45 18.71	19 19	0						
		1 RB	25	2593	40620	18.52	19	0						
		110	20	2639	41080	18.84	19	0						
				2685	41540	18.33	19	0						
				2501	39700	18.44	19	0						
				2547	40160	18.79	19	0						
			49	2593	40620	18.54	19	0						
				2639	41080	18.81	19	0						
				2685	41540	18.39	19	0						
				2501	39700 40160	18.43	19 19	0						
	QPSK		0	2547 2593	40620	18.64 18.45	19	0						
	QI OIL			2639	41080	18.83	19	0						
				2685	41540	18.22	19	0						
		25 RB	25 RB	25 RB		2501	39700	18.40	19	0				
					25 RB				2547	40160	18.63	19	0	
						12	2593	40620	18.43	19	0			
							2639	41080	18.75	19	0			
									2685	41540	18.26	19	0	
							2501	39700	18.39	19	0			
			25	2547 2593	40160 40620	18.71 18.44	19 19	0						
			25	2639	41080	18.69	19	0						
				2685	41540	18.25	19	0						
		l	2501	39700	18.38	19	0							
				2547	40160	18.59	19	0						
		50	RB	2593	40620	18.41	19	0						
				2639	41080	18.71	19	0						
10			_	2685	41540	18.31	19	0						
10				2501	39700	18.48	19	0						
							2547	40160	18.67	19	0			
			0	2593	40620	18.50	19	0						
				2639 2685	41080 41540	18.79 18.30	19 19	0						
				2501	39700	18.45	19	0						
				2547	40160	18.65	19	0						
		1 RB	36	2593	40620	18.46	19	0						
				2639	41080	18.74	19	0						
				2685	41540	18.28	19	0						
				2501	39700	18.39	19	0						
				2547	40160	18.73	19	0						
			74	2593	40620	18.51	19	0						
				2639	41080	18.71	19	0						
			 	2685	41540	18.34	19	0						
				2501 2547	39700 40160	18.45	19 19	0						
	16-QAM		0	2547 2593	40160 40620	18.67 18.49	19	0						
	. 5 G/11VI		l ĭ	2639	41080	18.87	19	0						
				2685	41540	18.24	19	0						
				2501	39700	18.43	19	0						
				2547	40160	18.66	19	0						
		36 RB	18	2593	40620	18.49	19	0						
				2639	41080	18.79	19	0						
				2685	41540	18.29	19	0						
				2501	39700	18.43	19	0						
				2547	40160	18.74	19	0						
			37	2593	40620	18.48	19	0						
				2639	41080	18.73	19	0						
			<u> </u>	2685 2501	41540	18.29 18.44	19 19	0						
				2501 2547	39700 40160	18.44 18.64	19 19	0						
		75	RB	2593	40620	18.45	19	0						
		/3		2639	41080	18.77	19	0						
								/51						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 106 of 328

					TD	DD Band 41									
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB							
				2498.5	39675	18.51	19	0							
				2547.8	40148	18.72	19	0							
	QPSK		0	2593	40620	18.52	19	0							
				2640.3	41093	18.90	19	0							
				2687.5	41565	18.36	19	0							
				2498.5	39675	18.48	19	0							
				2547.8	40148	18.71	19	0							
		1 RB	12	2593	40620	18.52	19	0							
				2640.3	41093	18.82	19	0							
				2687.5	41565	18.34	19	0							
				2498.5	39675	18.48	19	0							
			0.4	2547.8	40148	18.72	19	0							
			24	2593	40620	18.54	19	0							
				2640.3 2687.5	41093	18.78	19	0							
					41565	18.44	19	0							
				2498.5 2547.8	39675 40148	18.43 18.66	19 19	0							
	OPSK		0	2593	40620	18.48	19	0							
	QI OIL		U	2640.3	41093	18.76	19	0							
				2687.5	41565	18.28	19	0							
				2498.5	39675	18.42	19	0							
							2547.8	40148	18.64	19	0				
		12 RB			40620	18.48	19	0							
	12 KB				2640.3	41093	18.74	19	0						
				2687.5	41565	18.25	19	0							
											2498.5	39675	18.41	19	0
								2547.8	40148	18.66	19	0			
			13	2593	40620	18.49	19	0							
				2640.3	41093	18.70	19	0							
				2687.5	41565	18.26	19	0							
				2498.5	39675	18.42	19	0							
			2547.8	40148	18.64	19	0								
	25	RB	2593	40620	18.47	19	0								
				2640.3	41093	18.77	19	0							
5				2687.5	41565										
					2498.5	39675									
			_	2547.8	40148										
			0	2593	40620										
				2640.3	41093		18.47 19 0 18.77 19 0 18.29 19 0 18.52 19 0 18.72 19 0 18.55 19 0 18.90 19 0 18.37 19 0 18.48 19 0								
				2687.5	41565										
				2498.5	39675										
		1 RB	40	2547.8	40148	18.71	19	0							
		IKD	12	2593 2640.3	40620 41093	18.51 18.83	19 19	0							
				2687.5 2498.5	41565 39675	18.36 18.49	19 19	0							
				2547.8	40148	18.49	19	0							
			24	2593	40148	18.55	19	0							
				2640.3	41093	18.78	19	0							
				2687.5	41565	18.44	19	0							
				2498.5	39675	18.39	19	0							
				2547.8	40148	18.63	19	0							
	16-QAM		0	2593	40620	18.47	19	0							
				2640.3	41093	18.72	19	0							
				2687.5	41565	18.28	19	0							
				2498.5	39675	18.37	19	0							
				2547.8	40148	18.60	19	0							
		12 RB	6	2593	40620	18.45	19	0							
				2640.3	41093	18.74	19	0							
				2687.5	41565	18.25	19	0							
				2498.5	39675	18.37	19	0							
				2547.8	40148	18.63	19	0							
			13	2593	40620	18.46	19	0							
				2640.3	41093	18.68	19	0							
				2687.5	41565	18.27	19	0							
				2498.5	39675	18.44	19	0							
				2547.8	40148	18.67	19	0							
		25	RB	2593	40620	18.48	19	0							
				2640.3	41093	18.76	19	0							
	ı			2687.5	41565	18.32	19	0							

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. t (886-2) 2299-3279



Page: 107 of 328

				FDD Band 66				
				- 55 Band 00			Torest	
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1720	132072	16.68	17.5	0
			0	1745	132322	17.15	17.5	0
				1770	132572	17.39	17.5	0
				1720	132072	17.34	17.5	0
		1 RB	50	1745	132322	17.23	17.5	0
				1770	132572	17.22	17.5	0
				1720	132072	17.19	17.5	0
			99	1745	132322	17.02	17.5	0
				1770	132572	17.47	17.5	0
				1720	132072	17.16	17.5	0
	QPSK		0	1745	132322	17.09	17.5	0
				1770	132572	17.39	17.5	0
				1720	132072	17.19	17.5	0
		50RB	25	1745	132322	17.22	17.5	5 0 5 0 5 0 5 0 5 0 5 0 5 0 5 0
				1770	132572	17.22	17.5	
				1720	132072	17.16	17.5	
			50	1745	132322	17.41	17.5	0
				1770	132572	17.31	17.5	0
				1720	132072	17.36	17.5	0
		100)RB	1745				0
20				1770	132572	17.45		0
			0	1720	132072	16.82		
			0	1745	132322			
				1770				
				1720				
		1 RB	50	1745				
				1770				
				1720	132072 16.68 17.5 0 132322 17.15 17.5 0 132572 17.39 17.5 0 132072 17.34 17.5 0 132322 17.23 17.5 0 132572 17.22 17.5 0 132072 17.19 17.5 0 132072 17.19 17.5 0 132572 17.47 17.5 0 132072 17.16 17.5 0 132072 17.16 17.5 0 132322 17.09 17.5 0 132572 17.39 17.5 0 132072 17.19 17.5 0 132322 17.22 17.5 0 132072 17.19 17.5 0 132322 17.22 17.5 0 132322 17.22 17.5 0 132072 17.16 17.5 0	-		
			99	1745				
				1770				
	40.0444			1720				
	16-QAM		0	1745				-
				1770				
		5000	0.5	1720				
		50RB	25	1745				
				1770				
			E0	1720				
			50	1745				
				1770				
		400	\DD	1720				
		100R		1745				
				1770	132572	16.86	17.5	0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 108 of 328

				FDD Band 66				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance	MPR Allowed per 3GPP(dB)
				1717.5	132047	16 17	,	0
			0	1717.5	132322			ł — — — — — — — — — — — — — — — — — — —
				1772.5	132597			+
				1717.5	132047			
		1 RB	36	1745	132322			
				1772.5	132597			
				1717.5	132047			
			74	1745	132322			
				1772.5	132597			ł
				1717.5	132047	+		0
	QPSK		0	1745	132322	322 16.52 17.5 0 397 16.70 17.5 0 447 16.63 17.5 0 322 16.64 17.5 0 397 16.86 17.5 0	0	
				1772.5	132597			0
				1717.5	132047		17.5	0
		36RB	18	1745	132322	16.64	17.5	ower + Max. derance dBm) MPR Allowed per 3GPP(dB) 17.5 0
				1772.5	132597	16.86	17.5	
				1717.5	132047	16.69	17.5	
			37	1745	132322	16.87	17.5	
				1772.5	132597	16.73	17.5	0
			•	1717.5	132047	16.70	17.5	0
		75	RB	1745	132322	16.78	17.5	0
15				1772.5	132597	16.88	17.5	0
13			_	1717.5	132047	16.79	17.5	0
			0	1745	132322	16.38	17.5	0
				1772.5	132597	17.38	17.5	0
				1717.5	132047	17.10	17.5	0
		1 RB	36	1745	132322	16.82	17.5	ver + ax. MPR Allowed per 3GPP(dB) 3m) 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 7.5 0 <
				1772.5	132597	17.20	17.5	
				1717.5	132047	17.13	Tolerance (dBm) 16.17	
			74	1745	132322	17.00	17.5	
				1772.5	132597			0
				1717.5	132047			
	16-QAM		0	1745	132322	16.41	17.5	0
				1772.5	132597			3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
				1717.5	132047			
		36RB	18	1745	132322			
				1772.5	132597			
			67	1717.5	132047			
			37	1745	132322			
				1772.5	132597			
			D.D.	1717.5	132047			
		/5	RB	1745	132322			
				1772.5	132597	16.76	17.5	0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 109 of 328

				FDD Band 66				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1715	132022	16.36	17.5	0
			0	1745	132322	16.34	17.5	0
				1775	132622	16.89	17.5	0
				1715	132022	16.47	17.5	0
		1 RB	25	1745	132322	16.49	17.5	0
				1775	132622	16.54	17.5	0
				1715	132022	16.61	17.5	0
			49	1745	132322	16.66	17.5	0
				1775	132622	16.68	17.5	0
	QPSK			1715	132022	16.40	17.5	0
			0	1745	132322	16.40	17.5	0
				1775	132622	16.72	17.5	0
			1715	132022	16.47	17.5	0	
		25RB	12	1745	132322	16.46	17.5	0
				1775	132622	16.52	17.5	0
				1715	132022	16.51	17.5	0
			25	1745	132322	16.64	17.5	0
				1775	132622	16.63	17.5	0
				1715	132022	16.58	17.5	0
		50RB		1745	132322	16.61	17.5	0
10				1775	132622	16.76	17.5	0
		1 RB	0	1715	132022	16.82	17.5	0
				1745	132322	16.66	17.5	0
				1775	132622	17.40	17.5	0
				1715	132022	16.67	17.5	0
			25	1745	132322	16.51	17.5	0
				1775	132622	16.95	17.5	0
				1715	132022	16.74	17.5	0
			49	1745	132322	17.14	17.5	0
				1775	132622	17.16	17.5	0
	40.044		_	1715	132022	16.34	17.5	0
	16-QAM		0	1745	132322	16.36	17.5	0
				1775	132622	16.53	17.5	0
		OEDD.	10	1715	132022	16.39	17.5	0
		25RB	12	1745	132322	16.38	17.5	0
				1775	132622	16.48	17.5	0
			25	1715	132022	16.41	17.5	0
			25	1745	132322	16.54	17.5	0
				1775 1715	132622	16.44	17.5 17.5	0
		50	RB	1715	132022 132322	16.51 16.62	17.5	0
		30	עט	1745	132322	16.62	17.5	0
				1773	132022	10.78	i / . i	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 110 of 328

				FDD Band 66				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1712.5	131997	16.49	17.5	0
			0	1745	132322	16.83	17.5	0
				1777.5	132647	16.71	17.5	0
				1712.5	131997	16.65	17.5	0
		1 RB	12	1745	132322	16.92	17.5	0
				1777.5	132647	16.76	17.5	0
				1712.5	131997	16.83	17.5	0
			24	1745	132322	16.46	17.5	0
				1777.5	132647	17.16	17.5	0
	QPSK			1712.5	131997	16.41	17.5	0
			0	1745	132322	16.65	17.5	0
			1777.5	132647	16.71	17.5	0	
	12RB	6	1712.5	131997	16.65	17.5	0	
			1745	132322	16.59	17.5	0	
				1777.5	132647	16.80	17.5	0
				1712.5	131997	16.60	17.5	0
			13	1745	132322	16.62	17.5	0
				1777.5	132647	16.94	17.5	0
				1712.5	131997	16.70	17.5	0
		25RB		1745	132322	16.84	17.5	0
5				1777.5	132647	16.96	17.5	0
			0	1712.5	131997	16.91	17.5	0
				1745	132322	16.51	17.5	0
				1777.5	132647	17.17	17.5	0
				1712.5	131997	16.94	17.5	0
		1 RB	12	1745	132322	16.59	17.5	0
				1777.5	132647	17.19	17.5	0
				1712.5	131997	17.45	17.5	0
			24	1745	132322	17.37	17.5	0
				1777.5	132647	16.89	17.5	0
	40.044			1712.5	131997	16.44	17.5	0
	16-QAM		0	1745	132322	16.46	17.5	0
				1777.5	132647	16.73	17.5	0
		4055		1712.5	131997	16.57	17.5	0
		12RB	6	1745	132322	16.62	17.5	0
				1777.5	132647	16.71	17.5	0
			40	1712.5	131997	16.53	17.5	0
			13	1745	132322	16.81	17.5	0
				1777.5	132647	16.79	17.5	0
		O.F.	DD	1712.5	131997	16.64	17.5	0
		25	RB	1745 1777.5	132322	16.73	17.5	0
					132647	16.77	17.5	0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 111 of 328

				FDD Band 66				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1711.5	131987	16.04	17.5	0
			0	1745	132322	16.49	17.5	0
	1 RB			1778.5	132657	16.61	17.5	0
				1711.5	131987	16.10	17.5	0
		1 RB	7	1745	132322	16.25	17.5	0
				1778.5	132657	16.54	17.5	0
				1711.5	131987	16.05	17.5	0
			14	1745	132322	16.56	17.5	0
	-			1778.5	132657	16.79	17.5	0
				1711.5	131987	16.25	17.5	0
	QPSK		0	1745	132322	16.23	17.5	0
				1778.5	132657	16.40	17.5	0
	8RB	4	1711.5	131987	16.01	17.5	0	
			1745	132322	16.43	17.5	0	
				1778.5	132657	16.56	17.5	0
				1711.5	131987	16.25	17.5	0
			7	1745	132322	16.24	17.5	0
				1778.5	132657	16.41	17.5	0
				1711.5	131987	16.24	17.5	0
		15RB		1745 1778.5	132322	16.39	17.5	0
3					132657	16.57	17.5	0
			0	1711.5	131987	16.67	17.5	0
				1745	132322	16.43	17.5	0
				1778.5	132657	17.41	17.5	0
			_	1711.5	131987	16.85	17.5	0
		1 RB	7	1745	132322	16.13	17.5	0
				1778.5	132657	17.28	17.5	0
				1711.5	131987	16.38	17.5	0
			14	1745	132322	16.70	17.5	0
				1778.5	132657	16.94	17.5	0
				1711.5	131987	16.10	17.5	0
	16-QAM		0	1745	132322	16.08	17.5	0
				1778.5	132657	16.67	17.5	0
		000		1711.5	131987	15.75	17.5	0
		8RB	4	1745	132322	16.22	17.5	0
				1778.5	132657	16.43	17.5	0
			7	1711.5	131987	16.03	17.5	0
			7	1745	132322	16.02	17.5	0
				1778.5	132657	16.24	17.5	0
		4.5	DD	1711.5	131987	16.12	17.5	0
		15	RB	1745	132322	16.21	17.5	0
				1778.5	132657	16.48	17.5	0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 112 of 328

				FDD Band 66				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1710.7	131979	16.56	17.5	0
			0	1745	132322	16.65	17.5	0
				1779.3	132665	17.06	17.5	0
				1710.7	131979	16.65	17.5	0
		1 RB	2	1745	132322	16.68	17.5	0
				1779.3	132665	16.89	17.5	0
				1710.7	131979	16.46	17.5	0
			5	1745	132322	16.56	17.5	0
				1779.3	132665	16.74	17.5	0
	QPSK			1710.7	131979	16.48	17.5	0
			0	1745	132322	16.71	17.5	0
			1779.3	132665	16.84	17.5	0	
				1710.7	131979	16.41	17.5	0
	3RB	2	1745	132322	16.67	17.5	0	
				1779.3	132665	16.37	17.5	0
				1710.7	131979	16.39	17.5	0
			3	1745	132322	16.55	17.5	0
				1779.3	132665	17.00	17.5	0
				1710.7	131979	16.46	17.5	0
		6RB		1745	132322	16.55	17.5	0
1.4				1779.3	132665	16.60	17.5	0
			0	1710.7	131979	16.86	17.5	0
				1745	132322	17.00	17.5	0
				1779.3	132665	17.41	17.5	0
				1710.7	131979	16.82	17.5	0
		1 RB	2	1745	132322	17.20	17.5	0
				1779.3	132665	16.99	17.5	0
				1710.7	131979	16.95	17.5	0
			5	1745	132322	17.21	17.5	0
				1779.3	132665	17.40	17.5	0
	40.044			1710.7	131979	16.18	17.5	0
	16-QAM		0	1745	132322	16.74	17.5	0
				1779.3	132665	17.01	17.5	0
		000		1710.7	131979	16.42	17.5	0
		3RB	2	1745	132322	16.66	17.5	0
				1779.3	132665	16.98	17.5	0
			_	1710.7	131979	16.37	17.5	0
			3	1745	132322	16.80	17.5	0
				1779.3	132665	17.03	17.5	0
		e.	RB	1710.7	131979	16.48	17.5	0
		01	טי	1745 1779.3	132322	16.38	17.5	0
					132665	16.64	17.5	0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 113 of 328

WLAN802.11 a/b/g/n(20M/40M)/ac(20M/40M/80M) conducted power table:

TLANOV2.11 a/b/g/n(2011/4011)/ac(2011/4011/0011) conducted power table.								
Antenna	SI	so	MIMO					
Band	Chain 0	Chain 1	Chain0+1					
WLAN802.11b	V	V	_					
WLAN802.11g	V	V	_					
WLAN802.11n(20M)	V	V	V					
WLAN802.11n(40M)	V	V	V					
WLAN802.11ac	V	V	V					
WLAN802.11a	V	V	_					
WLAN802.11n(20M) 5G	V	V	V					
WLAN802.11n(40M) 5G	V	V	V					
WLAN802.11ac(20M) 5G	V	V	V					
WLAN802.11ac(40M) 5G	V	V	V					
WLAN802.11ac(80M) 5G	V	V	V					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 114 of 328

	Main Antenna									
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance	Average power (dBm)				
		1	2412		16.50	16.47				
		2	2417		17.50	17.41				
	802.11b	6	2437	1Mbps	17.50	17.44				
		10	2457		17.50	17.43				
		11	2462		16.50	16.24				
		1	2412		14.00	13.88				
2450 MHz	802.11g	6	2437	6Mbps	17.50	17.43				
2450 101112		11	2462		12.50	12.31				
		1	2412		14.00	13.86				
	802.11n-HT20	6	2437	MCS0	17.50	17.40				
		11	2462		12.50	12.50				
	802.11n-HT40	3	2422		13.50	13.32				
		6	2437	MCS0	16.50	16.18				
		9	2452		12.50	12.48				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 115 of 328

		Mair	n Antenna			
		, , ,			Max.	
Band	Mode	Channel	Frequency	Data Rate	Rated Avg. Power +	Average power
			(MHz)		Max.	(dBm)
					Tolerance	
		36	5180		14.00	13.95
	802.11a	40	5200	6Mbps	16.00	15.65
	002.11a	44	5220	Olvibbs	16.00	15.82
		48	5240		16.00	15.67
	802.11n-HT20	36	5180		14.00	13.76
		40	5200	MCS0	16.00	15.97
		44	5220		16.00	15.82
		48	5240		16.00	15.80
5.15-5.25 GHz		36	5180		14.00	13.69
	802.11n-VHT20	40	5200	MCS0	16.00	15.81
	802.1111-711120	44	5220	MCSO	16.00	15.77
		48	5240		16.00	15.70
	802.11n-HT40	38	5190	MCS0	12.00	11.85
	ου2. I III-Π I 4U	46	5230	INIC20	16.50	16.48
	802.11n-VHT40	38	5190	MCS0	12.00	11.78
		46	5230	IVICSU	16.50	16.47
	802.11n-VHT80	42	5210	MCS0	13.50	13.25

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 116 of 328

		Mair	n Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance	Average power (dBm)
		52	5260		16.00	15.79
	802.11a	56	5280	6Mbps	16.00	15.76
	002.11a	60	5300	Olvibps	16.00	15.90
		64	5320		13.50	13.44
	802.11n-HT20	52	5260		16.00	15.99
		56	5280	MCS0	16.00	15.93
		60	5300	IVICSO	16.00	15.97
		64	5320		13.50	13.25
5.25-5.35 GHz		52	5260		16.00	15.71
	802.11n-VHT20	56	5280	MCS0	16.00	15.66
	002.1111-111120	60	5300	IVICSO	16.00	15.99
		64	5320		13.50	13.43
	802.11n-HT40	54	5270	MCS0	16.50	16.47
	002.1111-11140	62	5310	IVICSO	13.50	13.17
	802.11n-VHT40	54	5270	MCS0	16.50	16.20
		62	5310	IVICOU	13.50	13.38
	802.11n-VHT80	58	5290	MCS0	13.50	13.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 117 of 328

			_			
		Mair	n Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance	Average power (dBm)
		100	5500		13.50	13.16
		104	5520		16.50	16.46
		120	5600		16.50	16.45
	802.11a	124	5620	6Mbps	16.50	16.30
		128	5640		16.50	16.17
		136	5680	1	16.50	16.33
		140	5700		13.00	12.94
		100	5500		13.50	13.36
		120	5600		16.50	16.47
	802.11n-HT20	124	5620	MCS0	16.50	16.39
		128	5640		16.50	16.33
		140	5700		13.00	12.90
		100	5500		13.50	13.37
		120	5600	MCS0	16.50	16.19
	802.11n-VHT20	124	5620		16.50	16.24
5600 MHz	802.11N-VH120	128	5640		16.50	16.35
		140	5700		13.00	12.95
		144	5720		16.50	16.32
		102	5510		13.50	13.22
		110	5550		16.50	16.28
	802.11n-HT40	118	5590	MCS0	16.50	16.30
		126	5630		16.50	16.47
		134	5670		16.50	16.28
		102	5510		13.50	13.37
		118	5590		16.50	16.24
	802.11n-VHT40	126	5630	MCS0	16.50	16.45
		134	5670		16.50	16.25
		142	5710		16.50	16.17
		106	5530		13.50	13.35
	802.11n-VHT80	122	5610	MCS0	16.50	16.23
		138	5690		16.50	16.48

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sgs.com



Page: 118 of 328

		Mair	n Antenna			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance	Average power (dBm)
		149	5745		16.50	16.37
	802.11a	157	5785	6Mbps	16.50	16.35
		165	5825		16.50	16.32
	802.11n-HT20	149	5745	MCS0	16.50	16.30
		157	5785		16.50	16.41
		165	5825		16.50	16.48
5800 MHz		149	5745		16.50	16.45
3000 101112	802.11n-VHT20	157	5785	MCS0	16.50	16.42
		165	5825		16.50	16.20
	802.11n-HT40	151	5755	MCS0	16.50	16.41
	002.1111-11140	159	5795	IVICSU	16.50	16.35
	802.11n-VHT40	151	5755	MCS0	16.50	16.25
		159	5795	IVICSU	16.50	16.17
	802.11n-VHT80	155	5775	MCS0	16.50	16.49

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 119 of 328

	Aux Antenna									
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max.	Average power (dBm)				
		4			Tolerance	4 / 0 /				
		1	2412		16.50	16.34				
	802.11b	2	2417	1Mbps	17.50	17.43				
		6	2437		17.50	17.49				
		10	2457		17.50	17.46				
		11	2462		16.50	16.36				
	802.11g	1	2412		14.50	14.48				
2450 MHz		6	2437	6Mbps	17.50	17.43				
2430 IVITZ	_	11	2462		12.50	12.32				
		1	2412		14.50	14.41				
	802.11n-HT20	6	2437	MCS0	17.50	17.47				
		11	2462		12.50	12.39				
	802.11n-HT40	3	2422		13.50	13.48				
		6	2437	MCS0	16.50	16.39				
		9	2452		11.50	11.37				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 120 of 328

		Aux	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance	Average power (dBm)
		36	5180	6Mbps	14.00	13.93
	802.11a	40	5200		16.00	15.91
	002.11a	44	5220		16.00	15.87
		48	5240		16.00	15.96
	802.11n-HT20	36	5180	MCS0	14.00	13.88
		40	5200		16.00	15.98
		44	5220		16.00	15.81
		48	5240		16.00	15.84
5.15-5.25 GHz		36	5180		14.00	13.90
	802.11n-VHT20	40	5200	MCS0	16.00	15.97
	002.1111-111120	44	5220	IVICSO	16.00	15.92
		48	5240		16.00	15.88
	802.11n-HT40	38	5190	MCS0	13.50	13.34
	002.1111-11140	46	5230	IVICOU	16.50	16.49
	802.11n-VHT40	38	5190	MCS0	13.50	13.49
		46	5230	IVICOU	16.50	16.33
	802.11n-VHT80	42	5210	MCS0	13.50	13.38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 121 of 328

		Aux	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance	Average power (dBm)
		52	5260		16.00	15.90
	802.11a	56	5280	6Mbps	16.00	15.98
	002.11a	60	5300	Olvibbs	16.00	15.95
		64	5320		13.50	13.41
		52	5260		16.00	15.95
	802.11n-HT20	56	5280	MCS0	16.00	15.96
		60	5300		16.00	15.82
		64	5320		13.50	13.36
5.25-5.35 GHz		52	5260		16.00	15.83
	802.11n-VHT20	56	5280	MCS0	16.00	15.98
	002.1111-711120	60	5300	IVICSU	16.00	15.86
		64	5320		13.50	13.31
	802.11n-HT40	54	5270	MCS0	16.50	16.47
	002.1111-1140	62	5310	IVICSU	13.50	13.43
	802.11n-VHT40	54	5270	MCS0	16.50	16.46
	002.1111-111140	62	5310	IVICSU	13.50	13.42
	802.11n-VHT80	58	5290	MCS0	13.50	13.46

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 122 of 328

			-			
		Aux	Antenna			
					Max.	
			Гжа жи . а ж а		Rated Avg.	Average
Band	Mode	Channel	Frequency	Data Rate	Power +	power
			(MHz)		Max.	(dBm)
					Tolerance	(0.2)
		100	5500		13.50	13.39
		104	5520		16.50	16.40
		120	5600		16.50	16.33
	802.11a	124	5620	6Mbps	16.50	16.34
		128	5640		16.50	16.35
		136	5680		16.50	16.47
		140	5700		13.00	12.81
		100	5500		13.50	13.42
		120	5600		16.50	16.47
	802.11n-HT20	124	5620	MCS0	16.50	16.45
		128	5640	1	16.50	16.33
		140	5700		13.00	12.96
		100	5500		13.50	13.39
		120	5600		16.50	16.39
	000 11 ₂ VUIT00	124	5620	1 ,,,,,,,,,	16.50	16.44
5600 MHz	802.11n-VHT20	128	5640	MCS0	16.50	16.41
		140	5700		13.00	12.80
		144	5720		16.50	16.47
		102	5510		14.00	13.96
		110	5550		16.50	16.37
	802.11n-HT40	118	5590	MCS0	16.50	16.39
		126	5630		16.50	16.34
		134	5670		16.50	16.31
		102	5510		14.00	13.83
		118	5590		16.50	16.45
	802.11n-VHT40	126	5630	MCS0	16.50	16.32
		134	5670		16.50	16.45
		142	5710		16.50	16.37
		106	5530		13.50	13.43
	802.11n-VHT80	122	5610	MCS0	16.50	16.39
		138	5690		16.50	16.48

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 123 of 328

		Aux	Antenna			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance	Average power (dBm)
		149	5745		16.50	16.37
	802.11a	157	5785	6Mbps	16.50	16.32
		165	5825		16.50	16.43
	802.11n-HT20	149	5745		16.50	16.42
		157	5785	MCS0	16.50	16.37
		165	5825		16.50	16.40
5800 MHz		149	5745		16.50	16.45
3000 IVITZ	802.11n-VHT20	157	5785	MCS0	16.50	16.30
		165	5825		16.50	16.44
	802.11n-HT40	151	5755	MCS0	16.50	16.41
	002.1111-11140	159	5795	IVICSU	16.50	16.44
	802.11n-VHT40	151	5755	MCS0	16.50	16.38
	002.1111-71140	159	5795	IVICSU	16.50	16.38
	802.11n-VHT80	155	5775	MCS0	16.50	16.46

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 124 of 328

Bluetooth conducted power table:

Mada Channal		Frequency	Average	Average Output Power (dBm)						
Mode	Channel	(MHz)	1Mbps	2Mbps	3Mbps	Power + Max. Tolerance (dBm)				
	CH 00	2402	4.37	-1.51	-1.42					
BR/EDR	CH 39	2441	4.31	-1.30	-1.13	5.1				
	CH 78	2480	3.77	-1.58	-1.67					

Mode	Channel	Frequency	Average Output Power (dBm)	Max. Rated Avg. Power + Max.	
Mode	Channel	(MHz)	GFSK	Tolerance (dBm)	
	CH 00	2402	3.30		
LE	CH 19	2440	3.62	5.1	
	CH 39	2480	3.39		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 125 of 328

1.3.1 LTE Downlink CA specification

LTE Downlink 2CA conducted power table

				200		Two	Compone	ent Carrier I	Maximum C	Conducted I						
				PCC							C 1			ower	4	Maximum
PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC (UL) RB	PCC (UL) RB Offset	PCC (DL) Channel	PCC (DL) Frequency [MHz]	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	LTE Tx.Power with DL CA active (dBm)	LTE Tx.Power with DL CA inactive (dBm)	Configurations	power
LTE B5	10	20600	844	QPSK	1	49	2600	889	LTE B1	20	300	2140	22.97	23.10	CA_1A-5A	Full power
LTE B5	10	20450	829	QPSK	1	0	2450	874	LTE B1	20	300	2140	21.94	21.98	CA_1A-5A	Reduced power
LTE B26	5	26715	816.5	QPSK	1	24	8715	861.5	LTE B1	20	300	2140	23.11	23.21	CA_1A-26A	Full power
LTE B26	15	26825	822.5	QPSK	36	0	8825	872.5	LTE B1	20	300	2140	20.92	20.97	CA_1A-26A	Reduced power
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B17	10	5790	740	23.44	23.66	CA_2A-17A	Full power
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B17	10	5790	740	16.86	16.96	CA_2A-17A	Reduced power
LTE B17	10	23780	709	QPSK	1	49	5780	739	LTE B2	20	900	1960	23.06	23.12	CA_2A-17A	Full power
LTE B17	10	23800	711	QPSK	1	49	5800	741	LTE B2	20	900	1960	19.27	19.48	CA_2A-17A	Reduced power
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B30	10	9820	2355	23.45	23.66	CA_2A-30A	Full power
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B30	10	9820	2355	16.77	16.96	CA_2A-30A	Reduced power
LTE B30	10	27710	2310	QPSK	1	0	9820	2355	LTE B2	20	900	1960	23.24	23.44	CA_2A-30A	Full power
LTE B30	10	27710	2310	QPSK	50	0	9820	2355	LTE B2	20	900	1960	16.92	16.96	CA_2A-30A	Reduced power
LTE B5	10	20600	844	QPSK	- 1	49	2600	889	LTE B3	20	1575	1842.5	22.87	23.10	CA_3A-5A	Full power
LTE B5	10	20450	829	QPSK	1	0	2450	874	LTE B3	20	1575	1842.5	21.75	21.98	CA_3A-5A	Reduced power
LTE B4	20	20300	1745	QPSK	1	99	2300	2145	LTE B13	10	5230	751	23.56	23.61	CA_4A-13A	Full power
LTE B4	20	20175	1732.5	QPSK	1	0	2175	2132.5	LTE B13	10	5230	751	17.28	17.46	CA_4A-13A	Reduced power
LTE B13	10	23230	782	QPSK	1	49	5230	751	LTE B4	20	2175	2132.5	22.86	23.08	CA_4A-13A	Full power
LTE B13	10	23230	782	QPSK	1	25	5230	751	LTE B4	20	2175	2132.5	20.25	20.48	CA_4A-13A	Reduced power
LTE B4	20	20300	1745	QPSK	1	99	2300	2145	LTE B17	10	5790	740	23.46	23.61	CA_4A-17A	Full power
LTE B4	20	20175	1732.5	QPSK	1	0	2175	2132.5	LTE B17	10	5790	740	17.37	17.46	CA_4A-17A	Reduced power
LTE B17	10	23780	709	QPSK	1	49	5780	739	LTE B4	20	2175	2132.5	23.05	23.12	CA_4A-17A	Full power
LTE B17	10	23800	711	QPSK	1	49	5800	741	LTE B4	20	2175	2132.5	19.35	19.48	CA_4A-17A	Reduced power
LTE B4	20	20300	1745	QPSK	1	99	2300	2145	LTE B30	10	9820	2355	23.40	23.61	CA_4A-30A	Full power
LTE B4	20	20175	1732.5	QPSK	1	0	2175	2132.5	LTE B30	10	9820	2355	17.36	17.46	CA_4A-30A	Reduced power
LTE B30	10	27710	2310	QPSK	- 1	0	9820	2355	LTE B4	20	2175	2132.5	23.27	23.44	CA_4A-30A	Full power
LTE B30	10	27710	2310	QPSK	50	0	9820	2355	LTE B4	20	2175	2132.5	16.91	16.96	CA_4A-30A	Reduced power
LTE B5	10	20600	844	QPSK	1	49	2600	889	LTE B7	20	3100	2655	23.04	23.10	CA_5A-7A	Full power
LTE B5	10	20450	829	QPSK	1	0	2450	874	LTE B7	20	3100	2655	21.94	21.98	CA_5A-7A	Reduced power
LTE B7	20	21100	2535	QPSK	1	99	3100	2655	LTE B5	10	2525	881.5	23.04	23.07	CA_5A-7A	Full power
LTE B7	20	21100	2535	QPSK	1	0	3100	2655	LTE B5	10	2525	881.5	17.27	17.49	CA_5A-7A	Reduced power
LTE B5	10	20600	844	QPSK	1	49	2600	889	LTE B30	10	9820	2355	22.94	23.10	CA_5A-30A	Full power
LTE B5	10	20450	829	QPSK	1	0	2450	874	LTE B30	10	9820	2355	21.82	21.98	CA_5A-30A	Reduced power
LTE B30	10	27710	2310	QPSK	1	0	9820	2355	LTE B5	10	2525	881.5	23.42	23.44	CA_5A-30A	Full power
LTE B30	10	27710	2310	QPSK	50	0	9820	2355	LTE B5	10	2525	881.5	16.92	16.96	CA_5A-30A	Reduced power
LTE B7	20	21100	2535	QPSK	1	99	3100	2655	LTE B20	20	6300	806	22.96	23.07	CA_7A-20A	Full power
LTE B7	20	21100	2535	QPSK	1	0	3100	2655	LTE B20	20	6300	806	17.31	17.49	CA_7A-20A	Reduced power
LTE B7	20	21100	2535	QPSK	1	99	3100	2655	LTE B28	20	9460	783	22.91	23.07	CA_7A-28A	Full power
LTE B7	20	21100	2535	QPSK	1	0	3100	2655	LTE B28	20	9460	783	17.24	17.49	CA_7A-28A	Reduced power
LTE B12	5	23035	701.5	QPSK	1	24	5035	731.5	LTE B30	10	9820	2355	22.96	23.19	CA_12A-30A	Full power
LTE B12	10	23095	707.5	QPSK	1	49	5095	737.5	LTE B30	10	9820	2355	19.26	19.49	CA_12A-30A	Reduced power
LTE B30	10	27710	2310	QPSK	1	0	9820	2355	LTE B12	10	5095	737.5	23.36	23.44	CA_12A-30A	Full power
LTE B30	10	27710	2310	QPSK	50	0	9820	2355	LTE B12	10	5095	737.5	16.86	16.96	CA_12A-30A	Reduced power
LTE B30	10	27710	2310	QPSK	1	0	9820	2355	LTE B29	10	9715	722.5	23.40	23.44	CA_29A-30A	Full power
LTE B30	10	27710	2310	QPSK	50	0	9820	2355	LTE B29	10	9715	722.5	16.71	16.96	CA_29A-30A	Reduced power
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B2	20	898	1959.8	23.42	23.66	CA_2C	Full power
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B2	20	898	1959.8	16.85	16.96	CA_2C	Reduced power
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B2	20	1100	1980	23.59	23.66	CA_2A-2A	Full power
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B2	20	1100	1980	16.78	16.96	CA_2A-2A	Reduced power
LTE B4	20	20300	1745	QPSK	1	0	2300	2145	LTE B4	20	2050	2120	23.53	23.61	CA_4A-4A	Full power
LTE B4	5	20375	1752.5	16QAM	1	0	2375	2152.5	LTE B4	20	2050	2120	17.23	17.45	CA_4A-4A	Reduced power
LTE B7	20	21350	2560	QPSK	1	99	3350	2680	LTE B7	20	3152	2660.2	22.68	22.91	CA_7C	Full power
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B7	20	3152	2660.2	17.30	17.47	CA_7C	Reduced power
LTE B7	20	21350	2560	QPSK	1	99	3350	2680	LTE B7	20	2850	2630	22.89	22.91	CA_7A-7A	Full power
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B7	20	2850	2630	17.32	17.47	CA_7A-7A	Reduced power
LTE B41	20	39750	2506	QPSK	1	99	39750	2506	LTE B41	20	39948	2525.8	22.82	22.89	CA_41C	Full power
LTE B41	20	39750	2506	QPSK	1	0	39750	2506	LTE B41	20	39948	2525.8	18.40	18.63	CA_41C	Reduced power
LTE B41	20	39750	2506	QPSK	1	99	39750	2506	LTE B41	20	41490	2680	22.83	22.89	CA_41A-41A	Full power
LTE B41	20	39750	2506	QPSK	1	0	39750	2506	LTE B41	20	41490	2680	18.46	18.63	CA_41A-41A	Reduced power

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 126 of 328

LTE Downlink 3CA conducted power table

								Thre	e Compon			n Conducte	Power				1			
	PCC		PCC (UL)	PCC		1		PCC (DL)		SCC SC	C1	SCC (DL)	<u> </u>	scc	CC 2	SCC (DL)	LTE Tx.Power	LTE Tx.Power	1	Meximum
PCC Band	Bendwidth IMHzi	PCC (UL) Channel	Frequency [MHz]	Modulation	PCC (UL) RB	PCC (UL) RB Offset	PCC (DL) Channel	Frequency [MHz]	SCC Bend	Bendwidth [MHz]	SCC (DL) Channel	Frequency [MHz]	SCC Band	Bandwidth [MHz]	SCC (DL) Channel	Frequency [MHz]	with DL CA active (dBm)	with DL CA inactive (dBm)	Configurations	power
LTE B7	20	21100	2535	QPSK	1	99	3100	2655	LTE B1	20	300	2140	LTE B3	20	1575	1842.5	22.92	23.07	CA_1A-3A-7A	Full power
LTE B7	20	21100	2535	QPSK	1	0	3100	2655	LTE B1	20	300	2140	LTE B3	20	1575	1842.5	17.24	17.49	CA_1A-3A-7A	Reduced power
LTE B2	20 20	18700 18700	1860 1860	QPSK QPSK	1	0	700 700	1940 1940	LTE B4 LTE B4	20 20	2175 2175	2132.5 2132.5	LTE B5	10	2525 2525	881.5 881.5	23.54 16.93	23.66 16.96	CA_2A-4A-5A CA_2A-4A-5A	Full power Reduced power
LTE B4	20	20300	1745	QPSK	1	99	2300	2145	LTE B2	20	900	1960	LTE B5	10	2525	881.5	23.37	23.61	CA_2A-4A-5A	Full power
LTE B4	20	20175	1732.5	QPSK	1	0	2175	2132.5	LTE B2	20	900	1960	LTE B5	10	2525	881.5	17.40	17.46	CA_2A-4A-5A	Reduced power
LTE B5	10 10	20600 20450	844 829	QPSK QPSK	1	49	2600 2450	889 874	LTE B2 LTE B2	20 20	900	1960 1960	LTE B4	20	2175 2175	2132.5 2132.5	22.96 21.97	23.10 21.98	CA_2A-4A-5A CA_2A-4A-5A	Full power Reduced power
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B4	20	2175	2132.5	LTE B13	10	5230	751	23.60	23.66	CA_2A-4A-13A	Full power
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B4	20	2175	2132.5	LTE B13	10	5230	751	16.75	16.96	CA_2A-4A-13A	Reduced power
LTE B4 LTE B4	20 20	20300 20175	1745 1732.5	QPSK QPSK	1	99	2300 2175	2145 2132.5	LTE B2 LTE B2	20 20	900 900	1960 1960	LTE B13	10	5230 5230	751 751	23.52 17.24	23.61 17.46	CA_2A-4A-13A CA_2A-4A-13A	Full power Reduced power
LTE B13	10	23230	782	QPSK	1	49	5230	751	LTE B2	20	900	1960	LTE B13	20	2175	2132.5	22.84	23.08	CA_2A-4A-13A	Full power
LTE B13	10	23230	782	QPSK	1	25	5230	751	LTE B2	20	900	1960	LTE B4	20	2175	2132.5	20.29	20.48	CA_2A-4A-13A	Reduced power
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B5	10	2525	881.5	LTE B30	10	9820	2355	23.53	23.66	CA_2A-5A-30A	Full power
LTE B2 LTE B5	20 10	18700 20600	1860 844	QPSK QPSK	1	0 49	700 2600	1940 889	LTE B5 LTE B2	10 20	2525 900	881.5 1960	LTE B30 LTE B30	10	9820 9820	2355 2355	16.80 23.05	16.96 23.10	CA_2A-5A-30A CA_2A-5A-30A	Reduced power Full power
LTE B5	10	20450	829	QPSK	1	0	2450	874	LTE B2	20	900	1960	LTE B30	10	9820	2355	21.86	21.98	CA_2A-5A-30A	Reduced power
LTE B30	10	27710	2310	QPSK	1	0	9820	2355	LTE B2	20	900	1960	LTE B5	10	2525	881.5	23.23	23.44	CA_2A-5A-30A	Full power
LTE B30	10	27710	2310	QPSK	50	0	9820	2355	LTE B2	20	900	1960	LTE B5	10	2525	881.5	16.82	16.96	CA_2A-5A-30A	Reduced power
LTE B2 LTE B2	20 20	18700 18700	1860 1860	QPSK QPSK	1	0	700 700	1940 1940	LTE B5	10 10	2525 2525	881.5 881.5	LTE B66 LTE B66	20 20	66786 66786	2145 2145	23.55 16.86	23.66 16.96	CA_2A-5A-66A CA_2A-5A-66A	Full power Reduced power
LTE B5	10	20600	844	QPSK	1	49	2600	889	LTE B2	20	900	1960	LTE B66	20	66786	2145	22.91	23.10	CA_2A-5A-66A	Full power
LTE B5	10	20450	829	QPSK	1	0	2450	874	LTE B2	20	900	1960	LTE B66	20	66786	2145	21.77	21.98	CA_2A-5A-66A	Reduced power
LTE B66	20 20	132322	1745 1770	QPSK QPSK	1	99 99	66786 67036	2145 2170	LTE B2	20 20	900	1960 1960	LTE B5	10	2525 2525	881.5 881.5	23.33 17.36	23.50 17.47	CA_2A-5A-66A CA_2A-5A-66A	Full power Reduced power
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B12	10	5095	737.5	LTE B30	10	9820	2355	23.58	23.66	CA_2A-12A-30A	Full power
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B12	10	5095	737.5	LTE B30	10	9820	2355	16.95	16.96	CA_2A-12A-30A	Reduced power
LTE B12	5 10	23035 23095	701.5 707.5	QPSK QPSK	1	24 49	5035 5095	731.5 737.5	LTE B2	20 20	900 900	1960 1960	LTE B30	10	9820 9820	2355	23.03	23.19	CA_2A-12A-30A	Full power
LTE B12 LTE B30	10	23095 27710	707.5 2310	QPSK QPSK	1	49	5095 9820	737.5 2355	LTE B2 LTE B12	20 10	900 5095	1960 737.5	LTE B30 LTE B2	10 20	9820 900	2355 1960	19.48 23.33	19.49 23.44	CA_2A-12A-30A CA_2A-12A-30A	Reduced power Full power
LTE B30	10	27710	2310	QPSK	50	0	9820	2355	LTE B12	10	5095	737.5	LTE B2	20	900	1960	16.83	16.96	CA_2A-12A-30A	
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B13	10	5230	751	LTE B66	20	66786	2145	23.46	23.66	CA_2A-13A-66A	Full power
LTE B2 LTE B13	20 10	18700 23230	1860 782	QPSK QPSK	1	49	700 5230	1940 751	LTE B13 LTE B2	10 20	5230 900	751 1960	LTE B66 LTE B66	20	66786 66786	2145 2145	16.78 23.02	16.96 23.08	CA_2A-13A-66A CA_2A-13A-66A	Reduced power Full power
LTE B13	10	23230	782	QPSK	1	25	5230	751	LTE B2	20	900	1960	LTE B66	20	66786	2145	20.44	20.48	CA_2A-13A-66A	Reduced power
LTE B66	20	132322	1745	QPSK	1	99	66786	2145	LTE B2	20	900	1960	LTE B13	10	5230	751	23.46	23.50	CA_2A-13A-66A	Full power
LTE B66 LTE B2	20 20	132572 18700	1770 1860	QPSK QPSK	1	99	67036 700	2170 1940	LTE B29	20 10	900 9715	1960 722.5	LTE B13 LTE B30	10	5230 9820	751 2355	17.29 23.49	17.47 23.66	CA_2A-13A-66A CA_2A-29A-30A	Reduced power Full power
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B29	10	9715	722.5	LTE B30	10	9820	2355	16.93	16.96	CA_2A-29A-30A	Reduced power
LTE B30	10	27710	2310	QPSK	1	0	9820	2355	LTE B2	20	900	1960	LTE B29	10	9715	722.5	23.32	23.44	CA_2A-29A-30A	Full power
LTE B30	10	27710	2310	QPSK	50	0	9820	2355	LTE B2	20	900	1960	LTE B29	10	9715	722.5	16.74	16.96	CA_2A-29A-30A	Reduced power
LTE B7	20	21100 21100	2535 2535	QPSK	1	99	3100 3100	2655 2655	LTE B3	20	1575 1575	1842.5 1842.5	LTE B20 LTE B20	20	6300 6300	806 806	23.06 17.31	23.07 17.49	CA_3A-7A-20A CA_3A-7A-20A	Full power Reduced power
LTE B7	20	21100	2535	QPSK	1	99	3100	2655	LTE B3	20	1575	1842.5	LTE B28	20	9460	783	22.99	23.07	CA_3A-7A-28A	Full power
LTE B7	20	21100	2535	QPSK	1	0	3100	2655	LTE B3	20	1575	1842.5	LTE B28	20	9460	783	17.43	17.49	CA_3A-7A-28A	Reduced power
LTE B4 LTE B4	20 20	20300 20175	1745 1732.5	QPSK QPSK	1	99	2300 2175	2145 2132.5	LTE B5	10 10	2525 2525	881.5 881.5	LTE B30 LTE B30	10	9820 9820	2355 2355	23.52 17.29	23.61 17.46	CA_4A-5A-30A CA_4A-5A-30A	Full power Reduced power
LTE B5	10	20175	844	QPSK	1	49	2600	889	LTE B4	20	2175	2132.5	LTE B30	10	9820	2355	23.02	23.10	CA_4A-5A-30A	Full power
LTE B5	10	20450	829	QPSK	1	0	2450	874	LTE B4	20	2175	2132.5	LTE B30	10	9820	2355	21.87	21.98	CA_4A-5A-30A	Reduced power
LTE B30	10	27710	2310	QPSK	1 50	0	9820	2355	LTE B4	20 20	2175	2132.5	LTE B5	10	2525 2525	881.5	23.25 16.92	23.44 16.96	CA_4A-5A-30A	Full power
LTE B30 LTE B4	10 20	27710 20300	2310 1745	QPSK QPSK	50	99	9820 2300	2355 2145	LTE B4 LTE B12	10	2175 5095	2132.5 737.5	LTE B5 LTE B30	10	2525 9820	881.5 2355	16.92 23.48	23.61	CA_4A-5A-30A CA_4A-12A-30A	Reduced power Full power
LTE B4	20	20175	1732.5	QPSK	1	0	2175	2132.5	LTE B12	10	5095	737.5	LTE B30	10	9820	2355	17.45	17.46	CA_4A-12A-30A	Reduced power
LTE B12	5	23035	701.5	QPSK	1	24	5035	731.5	LTE B4	20	2175	2132.5	LTE B30	10	9820	2355	23.16	23.19	CA_4A-12A-30A	Full power
LTE B12 LTE B30	10 10	23095 27710	707.5 2310	QPSK QPSK	1 1	49	5095 9820	737.5 2355	LTE B4 LTE B4	20 20	2175 2175	2132.5 2132.5	LTE B30 LTE B12	10	9820 5095	2355 737.5	19.40 23.39	19.49 23.44	CA_4A-12A-30A CA_4A-12A-30A	Reduced power Full power
LTE B30	10	27710	2310	QPSK	50	0	9820	2355	LTE B4	20	2175	2132.5	LTE B12	10	5095	737.5	16.88	16.96	CA_4A-12A-30A	Reduced power
LTE B4	20	20300	1745	QPSK	1	99	2300	2145	LTE B29	10	9715	722.5	LTE B30	10	9820	2355	23.48	23.61	CA_4A-29A-30A	Full power
LTE B4 LTE B30	20	20175	1732.5	QPSK QPSK	1	0	2175 9820	2132.5 2355	LTE B29 LTE B4	10 20	9715	722.5 2132.5	LTE B30 LTE B29	10	9820	2355	17.21	17.46 23.44	CA_4A-29A-30A	Reduced power
LTE B30	10 10	27710 27710	2310 2310	QPSK	50	0	9820	2355	LTE B4	20	2175 2175	2132.5	LTE B29	10	9715 9715	722.5 722.5	23.38 16.92	16.96	CA_4A-29A-30A CA_4A-29A-30A	Full power Reduced power
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B66	10	66837	2150.1	LTE B66	10	66936	2160	23.45	23.66	CA_2A-66B	Full power
LTE B2	20	18700 132047	1860 1717.5	QPSK	1	0 36	700 66511	1940 2117.5	LTE B66	10	66837 66604	2150.1 2126.8	LTE B66	10 20	66936 900	2160 1960	16.83 22.98	16.96 23.20	CA_2A-66B	Reduced power
LTE B66 LTE B66	15 15	132047	1717.5 1717.5	QPSK QPSK	1	36 36	66511 66511	2117.5	LTE B66 LTE B66	5	66604 66604	2126.8 2126.8	LTE B2	20	900	1960 1960	22.98 16.52	23.20 16.63	CA_2A-66B CA_2A-66B	Full power Reduced power
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B66	20	66536	2120	LTE B66	10	66680	2134.4	23.56	23.66	CA_2A-66C	Full power
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B66	20	66536	2120	LTE B66	10	66680	2134.4	16.94	16.96	CA_2A-66C	Reduced power
LTE B66 LTE B66	20 20	132572 132572	1770 1770	QPSK QPSK	1	99	67036 67036	2170 2170	LTE B66	20 20	66838 66838	2150.2 2150.2	LTE B2	20 20	900	1960 1960	23.32 17.31	23.49 17.47	CA_2A-66C CA_2A-66C	Full power
LTE B7	20	1325/2 21350	2560	QPSK	1	99	3350	2680	LTE BFF	20	3152	2150.2 2660.2	LTE B3	20	1575	1960	17.31 22.67	22.91	CA_2A-66C CA_3A-7C	Reduced power Full power
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B7	20	3152	2660.2	LTE B3	20	1575	1842.5	17.24	17.47	CA_3A-7C	Reduced power
LTE B5	10	20600	844	QPSK QPSK	1	49	2600	889	LTE B66	10	66837	2150.1	LTE B66	10	66936	2160	22.92	23.10	CA_5A-66B	Full power
LTE B5	10 15	20450 132047	829 1717.5	QPSK QPSK	1	36	2450 66511	874 2117.5	LTE B66	10	66837 66604	2150.1 2126.8	LTE B66 LTE B5	10	66936 2525	2160 881.5	21.80 23.18	21.98 23.20	CA_5A-66B CA_5A-66B	Reduced power Full power
LTE B66	15	132047	1717.5	QPSK	1	36	66511	2117.5	LTE B66	5	66604	2126.8	LTE B5	10	2525	881.5	16.45	16.63	CA_5A-66B	Reduced power
LTE B5	10	20600	844	QPSK	1	49	2600	889	LTE B66	20	66536	2120	LTE B66	10	66680	2134.4	22.94	23.10	CA_5A-66C	Full power
LTE B5	10	20450	829	QPSK	1	0	2450 67036	874	LTE B66	20	66536 66838	2120 2150.2	LTE B66	10	66680 2525	2134.4 881.5	21.94 23.41	21.98 23.49	CA_5A-66C	Reduced power
LTE B66 LTE B66	20 20	132572 132572	1770 1770	QPSK QPSK	1	99	67036 67036	2170 2170	LTE B66 LTE B66	20 20	66838 66838	2150.2 2150.2	LTE B5	10	2525 2525	881.5 881.5	23.41 17.29	23.49 17.47	CA_5A-66C CA_5A-66C	Full power Reduced power
LTE B13	10	23230	782	QPSK	1	49	5230	751	LTE B66	10	66837	2150.1	LTE B66	10	66936	2160	23.07	23.08	CA_13A-66B	Full power
LTE B13	10	23230	782	QPSK	-1	25	5230	751	LTE B66	10	66837	2150.1	LTE B66	10	66936	2160	20.45	20.48	CA_13A-66B	Reduced power
LTE B66 LTE B66	15 15	132047 132047	1717.5 1717.5	QPSK QPSK	1	36 36	66511 66511	2117.5 2117.5	LTE B66 LTE B66	5	66604 66604	2126.8 2126.8	LTE B13	10	5230 5230	751 751	23.00 16.52	23.20 16.63	CA_13A-66B CA_13A-66B	Full power Reduced power
LTE B13	10	23230	782	QPSK	1	36 49	5230	2117.5 751	LTE B66	20	66536	2126.8	LTE B66	10	66680	751 2134.4	16.52 22.89	16.63 23.08	CA_13A-66C	Full power
LTE B13	10	23230	782	QPSK	1	25	5230	751	LTE B66	20	66536	2120	LTE B66	10	66680	2134.4	20.31	20.48	CA_13A-66C	Reduced power
LTE B66	20	132572	1770	QPSK	1	0	67036	2170	LTE B66	20	66838	2150.2	LTE B13	10	5230	751	23.44	23.49	CA_13A-66C	Full power
LTE B66 LTE B66	20 20	132572 132072	1770 1720	QPSK QPSK	1	99	67036 66536	2170 2120	LTE B66 LTE B66	20 20	66838 66734	2150.2 2139.8	LTE B13 LTE B66	10 20	5230 66932	751 2159.6	17.22 23.18	17.47 23.25	CA_13A-66C CA_66D	Reduced power Full power
LIE DOO	20	132072	1720	QPSK	1	50	66536	2120	LTE B66	20	66734	2139.8	LTE B66	20	66932	2159.6	23.18 17.19	23.25 17.34	CA_66D	Reduced power

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 127 of 328

LTE CA information

A)

The device supports downlink LTE Carrier Aggregation (CA) only. It supports a maximum of 3 carriers in the downlink. Other Release 10 features or higher features are not supported, including Uplink Carrier Aggregation, Enhanced SC-FDMA and Uplink MIMO or other antenna diversity configurations etc. All uplink communications are identical to the Release 8 Specifications.

The possible downlink LTE CA combinations supported by this device are as below tables per 3GPP TS 36.521-1 V14.3.0. The conducted power measurement results of downlink LTE CA are provided as above per 3GPP TS 36.521-1 V14.3.0. According to KDB 941225 D05A and RF exposure procedures in TCB workshop Nov. 2017, the downlink LTE CA SAR test is not required.

B)

i) Combinations supported for intra-band carrier aggregation.

Intra-band contiguous (2CC)	Intra-band contiguous (3CC)
CA-2C (0)	CA-66D (0)
CA-7B (0)	
CA-7C (0)(1)(2)	
CA-41C (0)(1)(2)	

Intra-band contiguous CA combination

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 128 of 328

Table 1: intra-band contiguous CA

		ent carriers in	order of			
	-	sing carrier fre		Maximum		
E-UTRA CA configuration	Channel bandwidths	Channel bandwidths	Channel bandwidths	aggregated bandwidth	Bandwidth combination set	
	for carrier	for carrier	for carrier	[MHz]		
	[MHz]	[MHz]	[MHz]			
	5	20				
CA_2C	10	15,20		40	0	
	15	10,15,20				
	20	5,10,15,20				
CA_7B	15	5		20	0	
	15	15		40	0	
	20	20		40	U	
	10	20				
CA_7C	15	15,20		40	1	
	20	10,15,20				
	15	10,15		40	0	
	20	15,20		40	2	
	10	20				
	15	15,20		40	0	
	20	10,15,20				
	5,10	20				
	15	15,20		40	1	
CA_41C	20	5,10,15,20				
	10	15,20				
	15	10,15,20		40	2	
	20	10,15,20				
	10	20				
	20	20		40	3	
CA_66D	5	20	20	60	0	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 129 of 328

20	5	20	
20	20	5	
10	20	15	
15	20	10	
10,15,20	15,20	20	
15,20	10	20	
15	15,20	15	
20	15,20	10,15	
20	10	15	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 130 of 328

Intra-band non-contiguous (2CC CA-2A-2A (0) CA-4A-4A (0)(1) CA-7A-7A (0)(1)(2)(3) CA-41A-41A (0)(1)

Intra-band non-contiguous CA combination

Table 2: intra-band non-contiguous CA (with two sub-blocks)

-UTRACA configuration	-	ent carriers in sing carrier fre Channel bandwidths for carrier	Maximum aggregated bandwidth [MHz]	Bandwidth combination set
CA_2A-2A	5,10,15,20	5,10,15,20	40	0
	5,10,15,20	5,10,15,20	40	0
CA_4A-4A	5,10	5,10	20	1
	5	15		
	10	10,15	40	0
	15	15,20	40	0
CA_7A-7A	20	20		
	5,10,15,20	5,10,15,20	40	1
	5,10,15,20	5,10	30	2
	10,15,20	10,15,20	40	3
	10,15,20	10,15,20	40	0
CA_41A-41A	5,10,15,20	5,10,15,20	40	1

ii) The frequency band combinations supported for inter-band carrier aggregation.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 131 of 328

2 bands / 2CC	2 bands / 3CC	3 bands / 3CC
2 841145 / 200		CA_1A-3A-7A (0)
CA_1A-5A (0)(1)		CA_IA SA 7A (0)
CA_1A-26A (0)(1)		
CA_2A-4A (0)(1)(2)		CA_2A-4A-5A (0)
<u> </u>		CA 2A-4A-13A (0)
CA 2A-5A (0)(1)	CA 2C-5A (0)	CA 2A-5A-30A (0)
<u> </u>	<u> </u>	CA 2A-5A-66A (0)
CA_2A-12A (0)(1)(2)		CA_2A-12A-30A (0)
CA 2A-13A (0)(1)		CA_2A-13A-66A (0)
CA_2A-17A (0)		
CA_2A-29A (0)(1)(2)		CA 2A-29A-30A (0)
CA_2A-30A (0)		
CA_2A-66A (0)(1)(2)	CA_2A-66B (0)	
	CA_2A-66C (0)	
CA_3A-5A (0)(1)(2)(3)(4)		
CA_3A-7A (0)(1)	CA_3C-7A (0)	CA_3A-7A-20A (0)
	CA_3A-7B (0)	CA_3A-7A-28A (0)
	CA_3A-7C (0)(1)	
CA_4A-5A (0)(1)		CA_4A-5A-30A (0)
CA_4A-12A (0)(1)(2)(3)(4)(5)	CA_4A-12A-30A (0)
CA_4A-13A (0)(1)		
CA_4A-17A (0)		
CA_4A-29A (0)(1)(2)		CA_4A-29A-30A (0)
CA_4A-30A (0)		
CA_5A-7A (0)(1)		
CA_5A-30A (0)		
CA_5A-66A (0)	CA_5A-66B (0)	
	CA_5A-66C (0)	
CA_7A-20A (0)(1)		
CA_7A-28A (0)(1)		
CA_12A-30A (0)		
CA_13A-66A (0)	CA_13A-66B (0)	
	CA_13A-66C (0)	
CA_29A-30A (0)		

Inter band CA combination

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 132 of 328

Table 3: inter-band CA (two bands)

	1	ands)	I	I					
E-UTRA CA Configuration	E-UTRA Bands	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	Maximum aggregated bandwidth [MHz]	Bandwidth combination set
	1				Yes				
	5				Yes			20	0
CA_1A-5A	1			Yes	Yes	Yes	Yes		
	5			Yes	Yes			30	1
	1			Yes	Yes	Yes	Yes		
	26			Yes	Yes	Yes		35	0
CA_1A-26A	1			Yes	Yes				1
	26			Yes	Yes			20	
	2	Yes	Yes	Yes	Yes	Yes	Yes		_
	4			Yes	Yes	Yes	Yes	40	0
	2			Yes	Yes			20	1
CA_2A-4A	4			Yes	Yes				
	2			Yes	Yes	Yes	Yes	10	
	4			Yes	Yes	Yes	Yes	40	2
	2			Yes	Yes	Yes	Yes	0.0	
04.04.54	5			Yes	Yes			30	0
CA_2A-5A	2			Yes	Yes			00	
	5			Yes	Yes			20	1
CA_2C-5A	2			oandwic 36,521				50	0
	5			Yes	Yes				
	2			Yes	Yes	Yes	Yes	0.5	
	12			Yes	Yes			30	0
CA_2A-12A	2			Yes	Yes	Yes	Yes	30	
	12		Yes	Yes	Yes				1
	2			Yes	Yes			20	2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. t (886-2) 2299-3279



Page: 133 of 328

Г	ı		1	1	ı	T	1 1		
	12			Yes	Yes				
	2			Yes	Yes	Yes	Yes	00	0
0.4.0.4.0.4	13				Yes			30	0
CA_2A-13A	2			Yes	Yes				
	13				Yes			20	1
.	2			Yes	Yes				
CA_2A-17A	17			Yes	Yes			20	0
	2			Yes	Yes				
	29		Yes	Yes	Yes			20	0
	2			Yes	Yes				
CA_2A-29A	29			Yes	Yes			20	1
	2			Yes	Yes	Yes	Yes		
	29			Yes	Yes			30	2
CA_2A-30A	2			Yes	Yes	Yes	Yes		
	30			Yes	Yes			30	0
	2	Yes	Yes	Yes	Yes	Yes	Yes	40	0
	66			Yes	Yes	Yes	Yes		
	2			Yes	Yes				1
CA_2A-66A	66			Yes	Yes			20	
	2			Yes	Yes	Yes	Yes		
	66			Yes	Yes	Yes	Yes	40	2
	2			Yes	Yes	Yes	Yes		
CA_2A-66B		See (CA_66E	3 bandw	ridth cor	mbinatio	on set	40	0
	66	0 in 3	GPP T	S 36,52	1-1 tabl	e 5.4.2	A. 1-1		
	2			Yes	Yes	Yes	Yes		
CA_2A-66C		See 0	CA_66C	bandw	idth coi	mbinatio	on set	60	0
	66	0 in 3	GPP T	S 36,52	1-1 tabl	e 5.4.2	A. 1-1		
	3				Yes	Yes	Yes	0.5	
04 5: -:	5			Yes	Yes			30	0
CA_3A-5A	3				Yes				
	5			Yes	Yes			20	1

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 134 of 328

	1		1	1			1		I
	3			Yes	Yes	Yes	Yes	30	2
	5			Yes	Yes			30	2
	3			Yes	Yes	Yes	Yes	30	3
	5		Yes	Yes	Yes			30	3
	3		Yes	Yes	Yes			20	4
	5		Yes	Yes	Yes			20	4
	3			Yes	Yes	Yes	Yes	40	0
04.04.74	7				Yes	Yes	Yes	40	0
CA_3A-7A	3			Yes	Yes	Yes	Yes	40	1
	7			Yes	Yes	Yes	Yes	40	1
	3	See C	CA_3C I	oandwid	th com	binatior	set 0		
CA_3C-7A	3	in 30	SPP TS	36,521	-1 table	5.4.2A	. 1-1	60	0
	7			Yes	Yes	Yes	Yes		
	3			Yes	Yes	Yes	Yes		
CA_3A-7B	7			oandwid			40	0	
		in 30	3PP 18 	36,521	-1 table	5.4.2A	1-1 		
	3			Yes	Yes				
	7			oandwid 36,521		60	0		
CA_3A-7C	3	111 00	1	Yes	Yes				
	7			oandwid	dth com		60	1	
		in 30	<u>SPP TS</u> I	36,521	-1 table				
	4			Yes	Yes			20	0
CA_4A-5A	5			Yes	Yes				
07_ 1 7-37	4			Yes	Yes	Yes	Yes	30	1
	5			Yes	Yes			30	'
	4	Yes	Yes	Yes	Yes			20	0
	12			Yes	Yes			20	U
CA_4A-12A	4	Yes	Yes	Yes	Yes	Yes	Yes	30	1
	12			Yes	Yes			30	1
	4			Yes	Yes	Yes	Yes	30	2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 135 of 328

	1		1		ı				T
	12		Yes	Yes	Yes				
	4			Yes	Yes			00	
	12			Yes	Yes			20	3
	4			Yes	Yes	Yes	Yes	0.0	,
	12			Yes	Yes			30	4
	4			Yes	Yes	Yes		00	_
	12			Yes				20	5
	4			Yes	Yes	Yes	Yes	0.0	
	13				Yes			30	0
CA_4A-13A	4			Yes	Yes				
	13				Yes			20	1
	4			Yes	Yes				_
	29		Yes	Yes	Yes			20	0
CA_4A-29A	4			Yes	Yes				
	29			Yes	Yes			20	1
	4			Yes	Yes	Yes	Yes		
	29			Yes	Yes			30	2
	4			Yes	Yes	Yes	Yes		0
CA_4A-30A	30			Yes	Yes			30	0
	5	Yes	Yes	Yes	Yes				
0	7				Yes	Yes	Yes	30	0
CA_5A-7A	5			Yes	Yes				
	7				Yes	Yes	Yes	30	1
04 54 004	5			Yes	Yes			00	
CA_5A-30A	30			Yes	Yes			20	0
04 54 004	5			Yes	Yes			0.0	
CA_5A-66A	66			Yes	Yes	Yes	Yes	30	0
	5			Yes	Yes				
CA_5A-66B	66	See 0	CA_66E	3 bandw	ridth cor	on set	30	0	
	30	2 in 3	GPP T	S 36,52	1-1 tabl	A. 1-1			
CA_5A-66C	5			Yes	Yes			50	0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 136 of 328

	1	1					1		T
	00	See C	A_66C	bandw	idth coi	mbinatio	on set		
	66	2 in 3	GPP T	36,52	1-1 tabl				
	7				Yes	Yes	Yes		
	20			Yes	Yes			30	0
CA_7A-20A	7				Yes	Yes	Yes		
	20			Yes	Yes	Yes	Yes	40	1
	7			Yes	Yes	Yes	Yes	0.5	
	28			Yes	Yes	Yes		35	0
CA_7A-28A	7			Yes	Yes	Yes	Yes	40	
	28			Yes	Yes	Yes	Yes	40	1
	12			Yes	Yes			20	0
CA_12A-30A	30			Yes	Yes				
	13			Yes	Yes				
CA_13A-66A	66			Yes	Yes	Yes	Yes	30	0
	13			Yes	Yes				
CA_13A-66B	66				idth cor		30	0	
	13			Yes	Yes				
CA_13A-66C	66			bandw	vidth co		50	0	
		0 in 30	GPP I		1-1 tabl	e 5.4.2	A. 1-1		
CA_29A-30A	29			Yes	Yes			20	0
	30			Yes	Yes			20	

Table 4: inter-band CA (three bands)

E-UTRA CA Configuration	E-UTRA Bands	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	Maximum aggregated bandwidth [MHz]	Bandwidth combination set
	1			Yes	Yes	Yes	Yes		
CA_1A-3A-7A	3			Yes	Yes	Yes	Yes	60	0
	7				Yes	Yes	Yes		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 137 of 328

I			-			ı		
	2	Y	'es	Yes	Yes	Yes		
CA_2A-4A-5A	4	Y	es	Yes	Yes	Yes	50	0
	5	Y	es	Yes				
	2	Y	'es	Yes	Yes	Yes		
CA_2A-4A-13A	4	Y	'es	Yes	Yes	Yes	50	0
	13			Yes				
	2	Y	es	Yes	Yes	Yes		
CA_2A-5A-30A	5	Y	es	Yes			40	0
	30	Y	es	Yes				
	2	Y	es	Yes	Yes	Yes	5	
CA_2A-5A-66A	5	Y	es	Yes			50	0
	66	Y	es	Yes	Yes	Yes		
	2	Y	es	Yes	Yes	Yes		
CA_2A-12A-30A	12	Y	es	Yes			40	0
	30	Y	es	Yes				
	2	Y	es	Yes	Yes	Yes	50	0
CA_2A-13A-66A	13	Y	'es	Yes				
	66	Y	es	Yes	Yes	Yes		
	2	Y	es	Yes	Yes	Yes		
CA_2A-29A-30A	29	Y	es	Yes			40	0
	30	Y	es	Yes				
	3	Y	es	Yes	Yes	Yes		
CA_3A-7A-20A	7			Yes	Yes	Yes	60	0
	20	Y	es	Yes	Yes	Yes		
	3	Y	es	Yes	Yes	Yes		
CA_3A-7A-28A	7	Y	'es	Yes	Yes	Yes	60	0
	28	Y	'es	Yes	Yes	Yes	1	
	4	Y	'es	Yes	Yes	Yes		
CA_4A-5A-30A	5	Y	'es	Yes			40	0
	30		'es	Yes				
CA_4A-12A-30A	4	Y	es	Yes	Yes	Yes	40	0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



Page: 138 of 328

	12		Yes	Yes				
	30		Yes	Yes				
	4		Yes	Yes	Yes	Yes		
CA_4A-29A-30A	29		Yes	Yes			40	0
	30		Yes	Yes				

Note:

- 1) For the inter-band CA combinations, except B29 can't be PCC, all the listed bands above can be used as PCC or SCC.
- 2) The channel spacing and aggregated channel bandwidth for CA are identical to the associated specification in 3GPP TS 36.521-1 V14.3.0.
- 3) The reference test frequencies for CA refers to 3GPP TS 36.508 V14.2.0
- 4) Testing is not required in bands or modes not intended/allowed for US operation
- 5) Based on TCB workshop Nov. 2017, for inter-band downlink CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need consideration; i.e., the bold words bands in CA combination table.
- 6) Based on TCB workshop Nov. 2017, for intra-band downlink CA SAR test exclusion, only the CA configuration with the largest aggregated DL CA bandwidth in each frequency band group need consideration, i.e., the bold words bands in CA combination table, and independently for contiguous and non-contiguous CA.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

www.tw.sas.com



Page: 139 of 328

1.4 Test Environment

Ambient Temperature: 22±2° C Tissue Simulating Liquid: 22±2° C

1.5 Operation Description

For WWAN, the EUT is controlled by using a Radio Communication Tester, and the communication between the EUT and the tester is established by air link.

For WLAN, using chipset specific software to control the EUT, and makes it transmit in maximum power. The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged.

WWAN

Keyboard bottom touch against the flat phantom_0mm with power reduction

Keyboard bottom to the flat phantom_14mm without power reduction

WLAN

Keyboard bottom touch against the flat phantom_0mm without power reduction

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 140 of 328

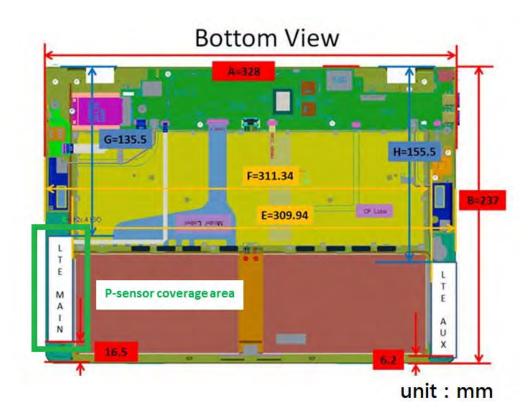

WWAN Antenna location (Bottom view)

(The p-sensor is colocated with WWAN Main antenna)


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 141 of 328

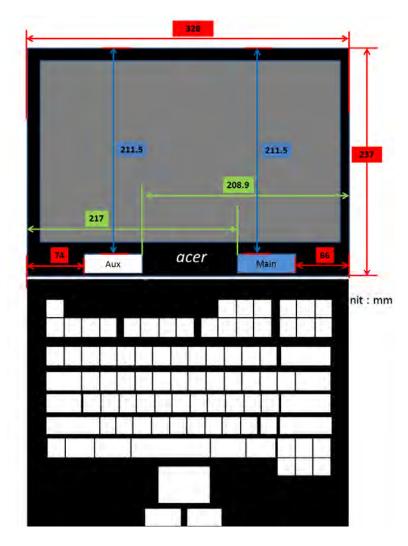

WLAN Antenna location (Front view)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 142 of 328

Note:

- 1. During the SAR testing, the DASY 5 system checks power drift by comparing the e-field strength of one specific location measured at the beginning with that measured at the end of the SAR testing.
- 2. The 3G SAR test reduction procedure is applied to HSDPA with 12.2 kbps RMC as the primary mode. Since the maximum output power in a secondary mode (HSDPA) is ≤ ¼ dB higher than the primary mode (WCDMA), SAR measurement is not required for the secondary mode (HSDPA).
- 3. The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) with 12.2 kbps RMC as the primary mode. Since the maximum output power in a secondary mode (HSPA) is ≤ ¼ dB higher than the primary mode (WCDMA), SAR measurement is not required for the secondary mode (HSPA).
- 4. LTE modes test according to KDB 941225D05v02r05.
 - a. Per Section 5.2.1, the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation.
 - Using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.
 - When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.
 b. Per Section 5.2.2, the largest channel bandwidth and measure SAR for QPSK with 50% RB allocation

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 143 of 328

- The procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.
- c. Per Section 5.2.3, the largest channel bandwidth and measure SAR for QPSK with 100% RB allocation
- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are \leq 0.8 W/kg.
- Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- d. Per Section 5.2.4, Higher order modulations
- For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 5.2.1, 5.2.2 and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is > 1/2 dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.
- e. Per Section 5.3, other channel bandwidth standalone SAR test requirements
- For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 5.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > 1/2 dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg. The equivalent channel configuration for the RB allocation, RB offset and modulation etc. is determined for the smaller channel bandwidth according to the same number of RB allocated in the largest channel bandwidth.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Page: 144 of 328

TDD LTE was tested at highest duty factor using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.

LTE downlink CA (KDB942225 D05A)

- 5. The device supports a maximum of 3 carriers in the downlink. All uplink communications are identical to the Release 8 specifications. Uplink maximum output power is measured with downlink carrier aggregation active, only for the channel with highest measured maximum output power when downlink carrier aggregation is inactive, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- 6. The downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements. The nominal channel spacing is determined by [BW1 + BW2 - 0.1*|BW1 - BW2|]/2 MHz, where BW1 and BW2 are the channel bandwidths of the CC in a 2-CC aggregation configuration.
- 7. The downlink PCC channel should be paired with the uplink channel according to normal configurations, as if there is no carrier aggregation. The downlink SCC should be adjacent to the PCC and remain within the downlink transmission band for contiguous intra-band CA. For non-contiguous intra-band CA, the SCC should be selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band. For inter-band CA, the SCC should be near the middle of its transmission band.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 145 of 328

8. When downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than 1/4 dB higher than the maximum output power measured when downlink carrier aggregation inactive, so SAR evaluation is not required for downlink carrier aggregation.

802.11b DSSS SAR Test Requirements:

- 9. SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured maximum output power channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 10. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

802.11g/n OFDM SAR Test Exclusion Requirements:

11.SAR is not required for 802.11g/n since the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 146 of 328

Initial Test Configuration:

- 12. An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band.
- 13. SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
- 14. For WLAN Main/Aux, 5.2n(40) / 5.3n(40) / 5.6ac(80) / 5.8ac(80) is chosen to be the initial test configuration.
- 15. Since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for subsequent test configuration.
- 16. According to KDB447498D01v06, SAR test exclusion is evaluated as below.
 - (1) SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances≤ 50 mm are determined by:

$$\frac{\text{Max. tune up power(mW)}}{\text{Min. test separation distance(mm)}} \times \sqrt{f(\text{GHz})} \le 3$$

When the minimum test separation distance is < 5mm, 5mm is applied to determine SAR test exclusion.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

> t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

SGS Taiwan Ltd.



Page: 147 of 328

(2) For test separation distances > 50 mm, and the frequency at 100 MHz to 1500MHz, the SAR test exclusion threshold is determined according to the following, and as illustrated in Appendix B of KDB447498 D01. [(Threshold at 50mm in step1) + (test separation distance-50mm) x(^{f(MHz)}/₁₅₀)](mW),

(3) For test separation distances > 50 mm, and the frequency at >1500MHz to 6GHz, the SAR test exclusion threshold is determined according to the following, and as illustrated in Appendix B of KDB447498 D01.

	Mode	WLAN Main 2.45GHz	WLAN Main 5GHz	
Max. tune-	up power(dBm)	17.5	16.5	
Max. tune	-up power(mW)	56.234	44.668	
	Test separation distance	less than 5	less than 5	
Bottom side	Calculation value	17.647	21.561	
	Require SAR testing?	YES	YES	
	Mode	WLAN Aux 2.45GHz	WLAN Aux 5GHz	ВТ
Max. tune-	·up power(dBm)	17.5	16.5	5.1
Max. tune	-up power(mW)	56.234	44.668	3.236
	Test separation	less than 5	less than 5	less than 5
	distance			
Bottom side	Calculation value	17.647	21.561	1.019

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 148 of 328

	Mode	WCDMA	B2	WCDM	A B4	WCDN	MA B5	נז	ΓΕ B2	ı	LTE B4	LTE B5	LTE B7
Max. tune	-up power(dBm)	16.5		16.	5	21	.5		24		24	22	17.5
Max. tune	e-up power(mW)	44.668	3	44.60	68	141	.254	25	1.189	2	251.189	158.489	56.234
	Test separatio distance	n less thai	n 5	less tha	an 5	less t	han 5	less	than 5	les	ss than 5	less than 5	less than 5
Bottom side	Calculation value	12.339)	11.82	27	25.9	994	69	9.248	(56.363	29.121	17.995
	Require SAR testing?	YES		YES	S	YI	ES	,	YES		YES	YES	YES
	Mode	LTE B12	Ľ	TE B13	LTE	B17	LTE I	326	LTE B3	30	LTE B38	LTE B41	LTE B66
Max. tune-	up power(dBm)	19.5		20.5	1	9.5	21		17		20	19	17.5
Max. tune-	up power(mW)	89.125	1	12.202	89	.125	125.8	393	50.11	9	100.000	79.433	56.234
	Test separation distance	less than 5	les	s than 5	less	than 5	less th	an 5	less tha	n 5	less than	5 less than 5	less than 5
Bottom side	Calculation value	15.030	1	9.844	15.	.030	23.0	97	15.23	5	32.311	26.007	14.963
	Require SAR testing?	YES		YES	Υ	ES	YE	s	YES		YES	YES	YES

17. According to KDB447498D01v06, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is ≤ 0.8 W/kg, when the transmission band is $\leq 100 \text{ MHz}$.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 149 of 328

- 18. According to KDB865664D01v01r04, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit)
- 19. The device supports both LTE B4 and LTE band 66. Since the supported frequency span for LTE B4 falls completely within the supported frequency span for LTE B66, both LTE bands have the same maximum tune-up power for full power / reduced power, and both LTE bands share the same transmission path, SAR was only assessed for LTE B66.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 150 of 328

1.6 Proximity sensor operation description

The P-sensor being used to reduce output power is capacitive in which when the object such as human body, metal or plastic is being approached, the sensing capacitance would be increased with the antenna pad. Once the capacitance is accumulated, and reached over the threshold as set in MCU of the microchip, the interruption signal is pulled low (High state without trigger) and further inform modem module of the transmitter to make power reduction.

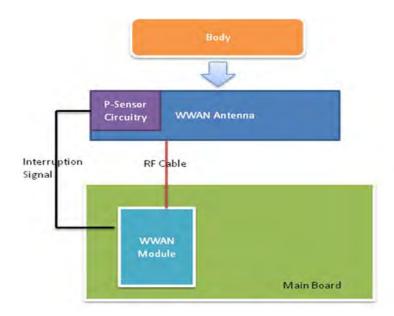

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 151 of 328

1.6.1 Proximity sensor measurement procedure

- The proximity sensor is collocated with WWAN antenna.
- 2. Output power is measured, and monitored by using the communication tester. A RF cables with sufficient length was being attached from the antenna port of the module, and used for the measurement. The appropriate loss attenuated from cable is compensated in the communication tester.



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 152 of 328

1.6.2 Trigger distances for bottom side

Test procedure:

- 1. The entire back surface or edge of the tablet is positioned below a flat phantom filled with the required tissue equivalent medium and positioned at least 20 mm further than the distance that triggers power reduction.
- 2. The back surface or edge is moved toward the phantom in 3 mm steps until the sensor triggers.
- 3. The back surface or edge is again moved toward the phantom, but in 1 mm steps, until it is at least 5 mm past the triggering point or touching the phantom
- If the tablet is not touching the phantom, it is moved in 3 mm steps until it touches the phantom to confirm that the sensor remains triggered and the maximum power stays reduced.
- The back surface or edge is then moved back (further away) from the phantom until maximum output power is returned to the normal maximum level.
- The process is then reversed by moving the tablet away from the phantom to determine triggering release, until it is at least 10 mm beyond the point that triggers the return of normal maximum power.
- 7. The measured output power within ± 5 mm of the triggering points, or until the tablet is touching the phantom, for movements to and from the phantom should be tabulated.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 153 of 328

- 8. To ensure all production units are compliant, it is generally necessary to reduce the triggering distance determined from the triggering tests by 1 mm, or more if it is necessary, and use the smallest distance for movements to and from the phantom, minus 1 mm, as the sensor triggering distance for determining the SAR measurement distance.
- 9. For back side, the trigger distance of proximity sensor is 15mm.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 154 of 328

1.6.3 Proximity sensor coverage

The following procedures do not apply and are not required for configurations where the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

Test procedure:

- 1. The back surface or edges of the tablet is positioned at a test separation distance less than or equal to the distance required for back surface or edge triggering, with both the antenna and sensor pad located at least 20 mm laterally outside the edge (boundary) of the phantom, along the direction of maximum antenna and sensor offset.
- 2. The similar sequence of steps applied to determine sensor triggering distance in section 1.6.2 are used to verify back surface and edge sensor coverage by moving the tablet (sensor and antenna) horizontally toward the phantom while maintaining the same vertical separation between the back surface or edge and the phantom.
- 3. After the exact location where triggering of power reduction is determined, with respect to the sensor and antenna, the tablet movement should be continued, in 3 mm increments, until both the sensor and antenna(s) are fully under the phantom and at least 20 mm inside the phantom edge.
- The process is then repeated from the other direction, at the opposite end of maximum antenna and sensor offset, by rotating the tablet 180 degrees.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 155 of 328

1.6.4 Results

The measured output power within ± 5 mm of the triggering points, or until the tablet is touching the phantom, for movements to and from the phantom is tabulated in the following.

Bottom side

Moving device toward the phantom

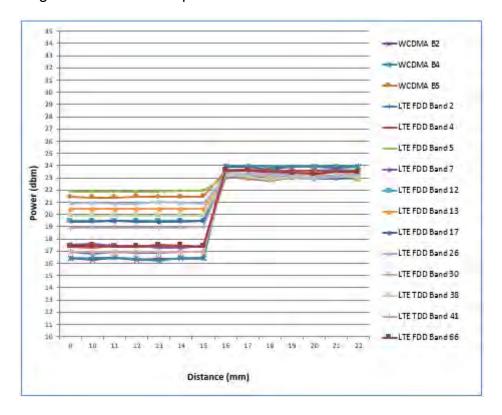

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 156 of 328

Moving device away from the phantom

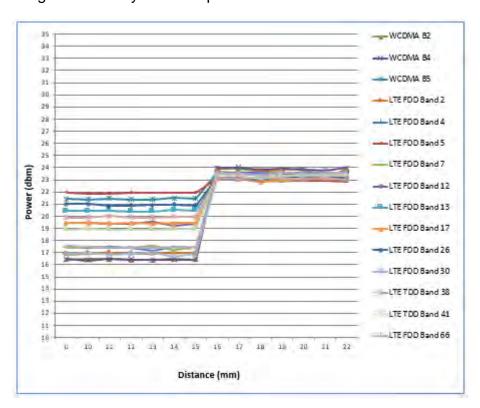

For bottom side, the worst trigger distance of proximity sensor is 15mm, and we perform bottom side SAR in 14mm without power reduction and 0mm with power reduction.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 157 of 328

Note:

- 1. The triggering variations and hysteresis effect has been evaluated separately according to the tissue-equivalent medium required for each frequency band, and sensor triggering does not change with different tissue-equivalent media.
- 2. The default power level for sensor failure and malfunctioning, including all compliance concerns, has been addressed in the client's operation description (1.6.5) for the proximity sensor implementation to be acceptable.
- 3. Conducted power is monitored qualitatively to identify the general triggering characteristics and recorded quantitatively, versus spacing.



Page: 158 of 328

1.6.5 Operation description for P-sensor

Power Reduction Design Specification (for P-sensor)

The mechanism of power reduction is used only for WWAN, not for Wi-Fi and Bluetooth. The reduced power for each technology/band is defined in Table1-1. With P-sensor mechanism, the WCDMA/LTE default power when P-sensor failure or malfunction are show in Table1-2 as below.

Table1-1: The power reduction scenario table

Band	Power Reduction
WCDMA B2	YES
WCDMA B4	YES
WCDMA B5	YES
LTE B2/4/5/7/12/13/17/26/30/38/41/66	YES
WLAN	NO
ВТ	NO

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 159 of 328

Table1-2: The default maximum power when p-sensor failure or malfunction

Technology / Band	Mode	Default Maximum Power (dBm)
UMTS B2	All	16.5
UMTS B4	All	16.5
UMTS B5	All	21.5
LTE B2	All	17
LTE B4	All	17.5
LTE B5	All	22
LTE B7	All	17.5
LTE B12	All	20.5
LTE B13	All	19.5
LTE B17	All	19.5
LTE B26	All	21
LTE B30	All	17
LTE B38	All	20
LTE B41	All	19
LTE B66	All	17.5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 160 of 328

1.7 The SAR Measurement System

A block diagram of the SAR measurement System is given in Fig. a. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation SAR= σ (|Ei|²)/ ρ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY 5 system for performing compliance tests consists of the following items:

- 1. A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- 2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage intissue simulating liquid. The probe is equipped with an optical surface detector system.
- 3. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

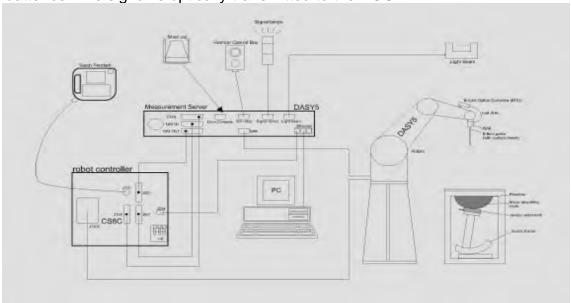


Fig. a The block diagram of SAR system

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

> t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com

SGS Taiwan Ltd.



Page: 161 of 328

- 4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- 5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- 6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- 7. A computer operating Windows 7.
- 8. DASY 5 software.
- 9. Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- 10. The SAM twin phantom enabling testing left-hand and right-hand usage.
- 11. The device holder for handheld mobile phones.
- 12. Tissue simulating liquid mixed according to the given recipes.
- 13. Validation dipole kits allowing to validate the proper functioning of the system.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 162 of 328

1.8 System Components

EX3DV4 E-Field Probe

0	O was a trical design with trians when a see
Construction	Symmetrical design with triangular core
	Built-in shielding against static charges
	PEEK enclosure material (resistant to
	organic solvents, e.g., DGBE)
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL
	750/835/1750/1900/2300/2450/2600/5200/
	5300/5600/5800MHz Additional CF for
	other liquids and frequencies upon request
Frequency	10 MHz to > 6 GHz
Directivity	± 0.3 dB in HSL (rotation around probe axis)
	± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic	10 μW/g to > 100 mW/g
Range	Linearity: ± 0.2 dB (noise: typically < 1 μW/g)
Dimensions	Tip diameter: 2.5 mm
Application	High precision dosimetric measurements in any exposure scenario
	(e.g., very strong gradient fields). Only probe which enables
	compliance testing for frequencies up to 6 GHz with precision of
	better 30%.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 163 of 328

PHANTOM

PHANTOW	
Model	ELI
Construction	The ELI phantom is used for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.
Shell Thickness	2 ± 0.2 mm
Filling Volume	Approx. 30 liters
Dimensions	Major axis: 600 mm
	Minor axis: 400 mm

DEVICE HOLDER

Construction	T	
Construction	The device holder (Supporter) for	
	Notebook is made by POM	
	(polyoxymethylene resin) ,	A
	which is non-metal and	
	non-conductive. The height can	
	be adjusted to fit varies kind of	
	notebooks.	
		Device Holder

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 164 of 328

1.9 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. These tests were done at 750/835/1750/1900/2300/2450/2600/5200/5300/5600/5800MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the ambient temperature of the laboratory was 21.7° C, the relative humidity was 62% and the liquid depth above the ear reference points was ≥ 15 cm ± 5 mm (frequency ≤ 3 GHz) or ≥ 10 cm ± 5 mm (frequency > 3 G Hz) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

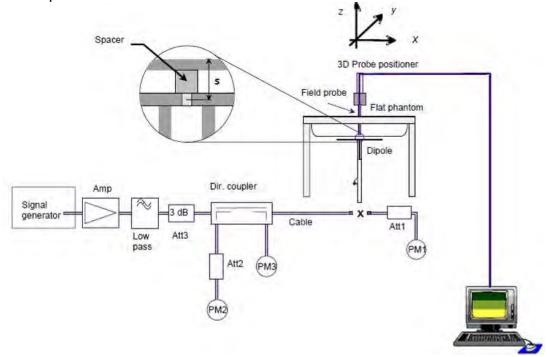


Fig. b The block diagram of system verification

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 165 of 328

Validation Kit	S/N	Frequ (Mł	•	1W Target SAR-1g (mW/g)	Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W	Deviation (%)	Measured Date
D750V3	1015	750	Body	8.76	2.19	8.76	0.00%	Jan. 05, 2018
D835V2	4d063	835	Body	9.57	2.46	9.84	2.82%	Jan. 08, 2018
D1750V2	1008	1750	Body	36.7	9.40	37.60	2.45%	Jan. 09, 2018
D1900V2	5d173	1900	Body	40.2	10.30	41.20	2.49%	Jan. 10, 2018
D2300V2	1023	2300	Body	46.4	12.20	48.80	5.17%	Jan. 11, 2018
D2450V2	727	2450	Body	50.6	12.90	51.60	1.98%	Jan. 12, 2018
D2600V2	1005	2600	Body	55.1	13.90	55.60	0.91%	Jan. 15, 2018
		5200	Body	72.8	7.35	73.50	0.96%	Jan. 16, 2018
D5GHzV2	1023	5300	Body	76.1	7.85	78.50	3.15%	Jan. 17, 2018
03011272	1023	5600	Body	79.6	8.05	80.50	1.13%	Jan. 18, 2018
		5800	Body	75.9	7.93	79.30	4.48%	Jan. 19, 2018

Table 1. Results of system verification

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 166 of 328

1.10 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this Head-simulant fluid were measured by using the Agilent Model 85070E Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Network Analyzer.

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The measured conductivity and permittivity are all within \pm 5% of the target values.

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, εr	Measured Conductivity, σ (S/m)	% dev ɛr	% dev σ
		704	55.710	0.960	56.252	0.934	-0.97%	2.69%
		707.5	55.697	0.960	56.286	0.936	-1.06%	2.51%
		709	55.691	0.960	56.226	0.938	-0.96%	2.31%
	Jan. 05, 2018	710	55.687	0.960	56.265	0.938	-1.04%	2.32%
		711	55.683	0.960	56.216	0.937	-0.96%	2.43%
		750	55.531	0.963	55.827	0.961	-0.53%	0.25%
		782	55.406	0.966	55.520	0.976	-0.20%	-1.05%
		822.5	55.249	0.969	55.152	1.001	0.18%	-3.30%
		826.4	55.234	0.969	55.174	1.005	0.11%	-3.68%
		829	55.223	0.970	55.093	1.006	0.24%	-3.76%
		831.5	55.214	0.970	55.084	1.010	0.23%	-4.15%
	I 00 0040	835	55.200	0.970	55.025	1.010	0.32%	-4.12%
	Jan. 08, 2018	836.5	55.195	0.972	55.020	1.012	0.32%	-4.13%
		836.6	55.195	0.972	55.020	1.012	0.32%	-4.12%
Body		841.5	55.180	0.978	55.021	1.017	0.29%	-3.99%
		844	55.172	0.981	54.944	1.018	0.41%	-3.76%
		846.6	55.164	0.984	54.951	1.021	0.39%	-3.73%
		1712.4	53.531	1.465	53.721	1.437	-0.36%	1.89%
		1720	53.511	1.469	53.666	1.438	-0.29%	2.14%
		1732.4	53.478	1.477	53.590	1.448	-0.21%	1.98%
	Jan. 09, 2018	1745	53.445	1.485	53.561	1.452	-0.22%	2.24%
		1750	53.432	1.488	53.551	1.454	-0.22%	2.31%
		1752.6	53.425	1.490	53.546	1.451	-0.23%	2.62%
		1770	53.381	1.501	53.521	1.462	-0.26%	2.60%
		1852.4	53.300	1.520	53.283	1.499	0.03%	1.38%
		1860	53.300	1.520	53.198	1.502	0.19%	1.18%
	Jan. 10, 2018	1880	53.300	1.520	53.158	1.505	0.27%	0.99%
		1900	53.300	1.520	53.022	1.516	0.52%	0.26%
		1907.6	53.300	1.520	53.007	1.517	0.55%	0.20%

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 167 of 328

	Jan. 11, 2018	2300	52.900	1.807	53.461	1.747	-1.06%	3.30%
	0an. 11, 2010	2310	52.887	1.816	53.402	1.763	-0.97%	2.93%
		2412	52.751	1.914	52.898	1.906	-0.28%	0.40%
	Jan. 12, 2018	2437	52.717	1.938	52.874	1.915	-0.30%	1.17%
		2450	52.700	1.950	52.808	1.931	-0.20%	0.97%
		2506	52.629	2.029	52.638	2.008	-0.02%	1.06%
		2510	52.624	2.035	52.604	2.011	0.04%	1.18%
		2535	52.592	2.071	52.530	2.044	0.12%	1.28%
		2549.5	52.573	2.091	52.473	2.061	0.19%	1.44%
		2560	52.560	2.106	52.430	2.074	0.25%	1.52%
	lan 45 0040	2580	52.535	2.134	52.286	2.104	0.47%	1.42%
	Jan. 15, 2018	2593	52.518	2.153	52.278	2.119	0.46%	1.57%
		2595	52.515	2.156	52.268	2.119	0.47%	1.70%
Body		2600	52.509	2.163	52.227	2.124	0.54%	1.79%
		2610	52.496	2.177	52.185	2.142	0.59%	1.61%
		2636.5	52.463	2.214	52.045	2.180	0.80%	1.56%
		2680	52.407	2.276	51.861	2.233	1.04%	1.90%
	Jan. 16, 2018	5200	49.014	5.299	49.587	5.121	-1.17%	3.36%
	Jan. 10, 2016	5230	48.974	5.334	49.559	5.190	-1.20%	2.71%
	Jan. 17, 2018	5270	48.919	5.381	49.460	5.271	-1.11%	2.04%
	Jan. 17, 2016	5300	48.879	5.416	49.371	5.263	-1.01%	2.83%
		5530	48.566	5.685	48.608	5.626	-0.09%	1.03%
	Jan. 18, 2018	5600	48.471	5.766	48.520	5.737	-0.10%	0.51%
	Jan. 10, 2016	5610	48.458	5.778	48.270	5.764	0.39%	0.24%
		5690	48.349	5.872	48.183	5.853	0.34%	0.32%
	Jan. 19, 2018	5775	48.234	5.971	48.041	6.024	0.40%	-0.89%
	Jan. 19, 2010	5800	48.200	6.000	48.006	6.004	0.40%	-0.07%

Table 2. Dielectric Parameters of Tissue Simulant Fluid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 168 of 328

The composition of the body tissue simulating liquid:

The composition of the body tissue simulating inquia.										
_			Ingredient							
Frequency (MHz)	Mode	DGMBE	Water	Salt	Preventol D-7	Cellulose	Sugar	Total amount		
750	Body	_	631.68 g	11.72 g	1.2 g	_	600 g	1.0L(Kg)		
850	Body	_	631.68 g	11.72 g	1.2 g	_	600 g	1.0L(Kg)		
1750	Body	300.67 g	716.56 g	4.0 g	_	_	-	1.0L(Kg)		
1900	Body	300.67 g	716.56 g	4.0 g	_	_	_	1.0L(Kg)		
2300	Body	301.7ml	698.3ml	_	_	-	_	1.0L(Kg)		
2450	Body	301.7ml	698.3ml	_	_	_	-	1.0L(Kg)		
2600	Body	301.7ml	698.3ml	_	_	_	_	1.0L(Kg)		

Simulating Liquids for 5 GHz, Manufactured by SPEAG:

Ingredients	Water	Esters, Emulsifiers, Inhibitors	Sodium and Salt
(% by weight)	60-80	20-40	0-1.5

Table 3. Recipes for Tissue Simulating Liquid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 169 of 328

1.11 Evaluation Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- 1. The extraction of the measured data (grid and values) from the Zoom Scan.
- 2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- 3. The generation of a high-resolution mesh within the measured volume
- 4. The interpolation of all measured values from the measurement grid to the high-resolution grid
- 5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- 6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within -2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans. The routines are verified and optimized for the grid dimensions used in

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279



Page: 170 of 328

these cube measurements.

The measured volume of 30x30x30mm contains about 30g of tissue.

The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is the moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

1.12 Probe Calibration Procedures

For the calibration of E-field probes in lossy liquids, an electric field with an accurately known field strength must be produced within the measured liquid. For standardization purposes it would be desirable if all measurements which are necessary to assess the correct field strength would be traceable to standardized measurement procedures. In the following two different calibration techniques are summarized:

1.12.1 Transfer Calibration with Temperature Probes

In lossy liquids the specific absorption rate (SAR) is related both to the electric field (E) and the temperature gradient ($\delta T / \delta t$) in the liquid.

$$SAR = \frac{\sigma}{\rho} |E|^2 = c \frac{\delta T}{\delta t}$$

whereby σ is the conductivity, ρ the density and c the heat capacity of the liquid.

Hence, the electric field in lossy liquid can be measured indirectly by measuring the temperature gradient in the liquid. Non-disturbing temperature probes (optical probes or thermistor probes with resistive lines) with high spatial resolution (<1-2 mm) and fast reaction time (<1 s) are available and can be easily calibrated with high precision [1]. The setup and the exciting source have no influence on the calibration; only the relative positioning uncertainties of the standard temperature probe and the E-field probe to be calibrated must be considered. However, several problems limit the available accuracy of probe calibrations with temperature probes:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 171 of 328

- 1. The temperature gradient is not directly measurable but must be evaluated from temperature measurements at different time steps. Special precaution is necessary to avoid measurement errors caused by temperature gradients due to energy equalizing effects or convection currents in the liquid. Such effects cannot be completely avoided, as the measured field itself destroys the thermal equilibrium in the liquid. With a careful setup these errors can be kept small.
- 2. The measured volume around the temperature probe is not well defined. It is difficult to calculate the energy transfer from a surrounding gradient temperature field into the probe. These effects must be considered, since temperature probes are calibrated in liquid with homogeneous temperatures. There is no traceable standard for temperature rise measurements.
- 3. The calibration depends on the assessment of the specific density, the heat capacity and the conductivity of the medium. While the specific density and heat capacity can be measured accurately with standardized procedures (\sim 2% for c; much better for ρ), there is no standard for the measurement of the conductivity. Depending on the method and liquid, the error can well exceed ±5%.
- 4. Temperature rise measurements are not very sensitive and therefore are often performed at a higher power level than the E-field measurements. The nonlinearities in the system (e.g., power measurements, different components, etc.) must be considered.

Considering these problems, the possible accuracy of the calibration of E-field probes with temperature gradient measurements in a carefully designed setup is about ±10% (RSS) [2]. Recently, a setup which is a combination of the waveguide techniques and the thermal measurements was presented in [3]. The estimated uncertainty of the setup is ±5% (RSS) when the same liquid is used for the calibration and for actual measurements and ±7-9% (RSS) when not, which is in good agreement with the estimates given in [2].

1.12.2 Calibration with Analytical Fields

In this method a technical setup is used in which the field can be calculated analytically from measurements of other physical magnitudes (e.g., input power). This corresponds to the standard field method for probe calibration in air; however, there is no standard defined for fields in lossy liquids. When using calculated fields in lossy liquids for probe calibration, several

points must be considered in the assessment of the uncertainty:

1. The setup must enable accurate determination of the incident power.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 172 of 328

- 2. The accuracy of the calculated field strength will depend on the assessment of the dielectric parameters of the liquid.
- 3. Due to the small wavelength in liquids with high permittivity, even small setups might be above the resonant cutoff frequencies. The field distribution in the setup must be carefully checked for conformity with the theoretical field distribution.

References

- N. Kuster, Q. Balzano, and J.C. Lin, Eds., Mobile Communications Safety, Chapman & Hall, London, 1997.
- K. Meier, M. Burkhardt, T. Schmid, and N. Kuster, \Broadband calibration of E-field probes in lossy media", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1954{1962, Oct. 1996.
- K. Jokela, P. Hyysalo, and L. Puranen, \Calibration of specific absorption rate (SAR) probes in waveguide at 900 MHz", IEEE Transactions on Instrumentation and Measurements, vol. 47, no. 2, pp. 432{438, Apr. 1998.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Page: 173 of 328

1.13 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1, By the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

- Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube).
- 2. Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.
- 3. Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.tw.sas.com

SGS Taiwan Ltd.



Page: 174 of 328

of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section. (Table 4.)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR (Brain)	1.60 W/Kg	8.00 W/Kg
Spatial Average SAR (Whole Body)	0.08 W/Kg	0.40 W/Kg
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 W/Kg	20.00 W/Kg

Table 4. RF exposure limits

Notes:

- 1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
- 2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

t (886-2) 2299-3279



Page: 175 of 328

2. Summary of Results

WCDMA Band II (without power reduction)

Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Avg. Power	Scaling	Averaged 19 (W/ Measured	g kg)	Plot page
WCDMA Band II	Bottom side	14	9262	1852.4	24.00	23.93	1.62%	0.752	0.764	-

WCDMA Band II (with power reduction)

Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Power	Scaling	Averaged 1, (W/	g	Plot page
					Tolerance (abin)	(dBm)		Measured	Reported	
	Bottom side	0	9262	1852.4	16.50	16.49	0.23%	1.190	1.193	204
WCDMA	Bottom side*	0	9262	1852.4	16.50	16.49	0.23%	1.170	1.173	-
Band II	Bottom side	0	9400	1880	16.50	16.32	4.23%	1.020	1.063	-
	Bottom side	0	9538	1907.6	16.50	16.26	5.68%	1.120	1.184	-

⁻ repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 176 of 328

WCDMA Band IV (without power reduction)

1	Mode	Position	Distanc e (mm)	СН	(MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	AVg. Power	Scaling	Averaged 1 (W/ Measured	g kg)	Plot page
	CDMA and VI	Bottom side	14	1513	1752.6	24.00	23.99	0.23%	0.650	0.651	1

WCDMA Band IV (with power reduction)

Mode	Position	Distanc e (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Avg. Power	Scaling	Averaged 1 (W/ Measured	g ˈkg)	Plot page
	Bottom side	0	1312	1712.4	16.50	16.30	4.71%	0.838	0.877	-
WCDMA	Bottom side	0	1412	1732.4	16.50	16.38	2.80%	0.864	0.888	-
Band VI	Bottom side	0	1513	1752.6	16.50	16.49	0.23%	1.040	1.042	205
	Bottom side*	0	1513	1752.6	16.50	16.49	0.23%	1.000	1.002	-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 177 of 328

WCDMA Band V (without power reduction)

Mode	Position	Distanc e (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Avg. Power	Scaling	(۷۷/	g ˈkg)	Plot page
						(ubiii)		Measured	Reported	
WCDMA Band V	Bottom side	14	4132	826.4	24.00	23.55	10.92%	0.404	0.448	-

WCDMA Band V (with power reduction)

Mode	Position	Distanc e (mm)	СН	(MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Avg. Power	Scaling	Averaged 1 (W/ Measured	g kg)	Plot page
	Bottom side	0	4132	826.4	21.50	21.49	0.23%	1.050	1.052	206
WCDMA	Bottom side*	0	4132	826.4	21.50	21.49	0.23%	0.999	1.001	-
Band 5	Bottom side	0	4183	836.6	21.50	21.25	5.93%	0.951	1.007	-
	Bottom side	0	4233	846.6	21.50	21.43	1.62%	0.935	0.950	-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 178 of 328

LTE FDD Band 2 (without power reduction)

Mode	Bandwidth	Modulation	RB	RB	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measured Avg.	Scaling	Averaged 1g (V	SAR over V/kg)	Plot
ivioue	(MHz)	Wodulation	Size	start	1 Oslubii	(mm)	5	(MHz)	Max. Toleranc e (dBm)	Power (dBm)	ŭ	Measured	Reported	page
			1 RB	0	Bottom side	14	18700	1860	24.000	23.66	8.14%	0.673	0.728	-
LTE Band 2	20MHz	QPSK	50 RB	25	Bottom side	14	18700	1860	23.000	22.42	14.29%	0.577	0.659	-
			100)RB	Bottom side	14	18700	1860	23.000	22.50	12.20%	0.561	0.629	-

LTE FDD Band 2 (with power reduction)

Mode	Bandwidth (MHz)	Modulation	DR Sizo	DR start	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measure d Avg.	Scaling		SAR over V/kg)	Plot
Wode	(MHz)	viodulatioi	ND SIZE	ND start	Fosition	(mm)	CIT	(MHz)	Max. Toleranc e (dBm)	Power		Measured	Reported	page
			1 RB		Bottom side	0	18700	1860	17.00	16.96	0.93%	1.100	1.110	207
			1 DB	0	Bottom side*	0	18700	1860	17.00	16.96	0.93%	1.080	1.090	
			TIND		Bottom side	0	18900	1880	17.00	16.52	11.69%	1.030	1.150	-
				99	Bottom side	0	19100	1900	17.00	16.42	14.29%	1.010	1.154	-
LTE Band2	20MHz	QPSK		0	Bottom side	0	18700	1860	17.00	16.68	7.65%	0.995	1.071	-
LIL Bandz	20101112	QFSK	50 RB	U	Bottom side	0	18900	1880	17.00	16.57	10.41%	0.971	1.072	-
			50	Bottom side	0	19100	1900	17.00	16.35	16.14%	0.969	1.125	-	
					Bottom side	0	18700	1860	17.00	16.66	8.14%	0.943	1.020	-
		100	RB	Bottom side	0	18900	1880	17.00	16.66	8.14%	0.920	0.995	-	
			100 R		Bottom side	0	19100	1900	17.00	16.42	14.29%	0.897	1.025	-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 179 of 328

LTE FDD Band 5 (without power reduction)

Mode	Bandwidth	Modulation	RR Siza	RR start	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measure d Avg.	Scaling	Averaged 1g (V	SAR over V/kg)	Plot
Wode	(MHz)	viodulation	IND SIZE	ND Start	r osidon	(mm)	OH	(MHz)	Max. Toleranc e (dBm)	Power		Measured	Reported	page
			1 RB	49	Bottom side	14	20600	844	24.00	23.10	23.03%	0.330	0.406	-
LTE Band 5	10MHz	QPSK	25 RB	25	Bottom side	14	20600	844	23.00	22.11	22.74%	0.344	0.422	-
			50	RB	Bottom side	14	20600	844	23.00	21.99	26.18%	0.309	0.390	-

LTE FDD Band 5 (with power reduction)

Mode	Bandwidth	Modulation	DR Sizo	DR stort	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measure d Avg.	Scaling		SAR over V/kg)	Plot
ivioue	(MHz)	viodulatioi	ND SIZE	ND start	FUSITION	(mm)	OH	(MHz)	Max. Toleranc e (dBm)	Power	J	Measured	Reported	page
				0	Bottom side	0	20450	829	22.00	21.98	0.46%	1.010	1.015	208
			1 RB	U	Bottom side*	0	20450	829	22.00	21.98	0.46%	0.998	1.003	-
			IND	25	Bottom side	0	20525	836.5	22.00	21.89	2.57%	0.985	1.010	-
				49	Bottom side	0	20600	844	22.00	21.96	0.93%	0.957	0.966	-
LTE Band5	10MHz	QPSK		0	Bottom side	0	20450	829	22.00	21.88	2.80%	0.963	0.990	-
LIL Dallus	TOWN 12	QFSK	25 RB	U	Bottom side	0	20525	836.5	22.00	21.70	7.15%	0.931	0.998	-
				25	Bottom side	0	20600	844	22.00	21.90	2.33%	0.912	0.933	-
					Bottom side	0	20450	829	22.00	21.85	3.51%	0.954	0.988	-
			50	RB	Bottom side	0	20525	836.5	22.00	21.72	6.66%	0.922	0.983	-
					Bottom side	0	20600	844	22.00	21.80	4.71%	0.918	0.961	-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

prosecuted to the fullest extent of the law.



Page: 180 of 328

LTE FDD Band 7 (without power reduction)

	Mode B	Bandwidth	Modulation	PR Siza	PR start	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measure d Avg.	Scaling	Averaged 1g (V		Plot
	Wiode	(MHz)	viodulatioi	ND SIZE	ND Start	r osidon	(mm)	OH	(MHz)	Max. Toleranc e (dBm)	Power	ŭ	Measured	Reported	page
Ī				1 RB	99	Bottom side	14	21100	2535	24.00	23.07	23.88%	0.628	0.778	-
ı	LTE Band7	20MHz	QPSK	50 RB	0	Bottom side	14	21350	2560	23.00	21.86	30.02%	0.588	0.764	-
ı				100	RB	Bottom side	14	21350	2560	23.00	21.89	29.12%	0.572	0.739	

LTE FDD Band 7 (with power reduction)

Mode	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Toleranc e (dBm)	Measure d Avg. Power (dBm)	Scaling	Averaged SAR over 1g (W/kg)		Plot
												Measured	Reported	page
LTE Band7	20MHz	QPSK	1 RB	0	Bottom side	0	21100	2535	17.50	17.49	0.23%	1.160	1.163	209
					Bottom side*	0	21100	2535	17.50	17.49	0.23%	1.090	1.093	-
					Bottom side	0	21350	2560	17.50	17.47	0.69%	1.150	1.158	-
				99	Bottom side	0	20850	2510	17.50	17.44	1.39%	0.995	1.009	-
			50 RB	25	Bottom side	0	21350	2560	17.50	17.45	1.16%	0.894	0.904	-
				50	Bottom side	0	20850	2510	17.50	17.31	4.47%	0.915	0.956	-
					Bottom side	0	21100	2535	17.50	17.28	5.20%	0.993	1.045	-
			100 RB		Bottom side	0	20850	2510	17.50	17.34	3.75%	0.897	0.931	-
					Bottom side	0	21100	2535	17.50	17.32	4.23%	0.952	0.992	-
					Bottom side	0	21350	2560	17.50	17.41	2.09%	0.873	0.891	-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 181 of 328

LTE FDD Band 12 (without power reduction)

Mode	Bandwidth	Modulation	DD Sizo	DP start	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measure d	Scaling	Averaged 1g (V		Plot
Mode	(MHz)	viodulatioi	KB Size	KD Slait	POSITION	(mm)	Сп	(MHz)	Max. Toleranc e (dBm)	Avg. Power (dBm)	ŭ	Measured	Reported	page
			1 RB	49	Bottom side	14	23095	707.5	24.00	23.18	20.78%	0.368	0.444	-
LTE Band12	10MHz	QPSK	25 RB	0	Bottom side	14	23060	704	23.00	22.10	23.03%	0.336	0.413	-
			50	RB	Bottom side	14	23130	711	23.00	22.17	21.06%	0.332	0.402	-

LTE FDD Band 12 (with power reduction)

Mode	Bandwidth	Modulation	DR Sizo	DB stort	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measure d	Scaling	_	SAR over V/kg)	Plot
Woue	(MHz)	viodulatioi	ND Size	ND Start	FUSITION	(mm)	OH	(MHz)	Max. Toleranc e (dBm)	Avg. Power (dBm)	ŭ	Measured	Reported	page
				0	Bottom side	0	23130	711	19.50	19.25	5.93%	0.858	0.909	210
			1 RB	U	Bottom side*	0	23130	711	19.50	19.25	5.93%	0.849	0.899	-
			IND	25	Bottom side	0	23060	704	19.50	19.32	4.23%	0.789	0.822	-
				49	Bottom side	0	23095	707.5	19.50	19.49	0.23%	0.823	0.825	-
LTE Banf12	10MHz	QPSK		0	Bottom side	0	23060	704	19.50	19.18	7.65%	0.744	0.801	-
LIL Dalli 12	I OIVII IZ	QFSK	25 RB	U	Bottom side	0	23.95	707.5	19.50	19.13	8.89%	0.670	0.730	-
				12	Bottom side	0	23130	711	19.50	19.08	10.15%	0.744	0.820	-
				Bottom side	0	23060	704	19.50	19.16	8.14%	0.601	0.650	-	
		50	RB	Bottom side	0	23095	707.5	19.50	19.10	9.65%	0.552	0.605	-	
					Bottom side	0	23130	711	19.50	19.17	7.89%	0.760	0.820	-

⁻ repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 182 of 328

LTE FDD Band 13 (without power reduction)

Mode	Bandwidth	Modulation	DR Sizo	DR start	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measured Avg. Power	Scaling	Averaged 1g (V	SAR over V/kg)	Plot
Wode	(MHz)	viodulatioi	KD SIZE	ND Stait	FUSILIUIT	(mm)	ОП	(MHz)	Max. Toleranc e (dBm)	(dBm)	ŭ	Measured	Reported	page
			1 RB	49	Bottom side	14	23230	782	24.00	23.08	23.59%	0.366	0.452	-
LTE Band13	10MHz	QPSK	25 RB	25	Bottom side	14	23230	782	23.00	21.98	26.47%	0.348	0.440	-
			50	RB	Bottom side	14	23230	782	23.00	22.13	22.18%	0.351	0.429	-

LTE FDD Band 13 (with power reduction)

Mode	Bandwidth	Modulation	DR Siza	PR start	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measured Avg. Power	Scaling	_	SAR over V/kg)	Plot
ivioue	(MHz)	viodulatioi	IND SIZE	ND Stait	i osidori	(mm)	5	(MHz)	Max. Toleranc e (dBm)	(dBm)	Ů	Measured	Reported	page
				0	Bottom side	0	23230	782	20.50	20.47	0.69%	0.903	0.909	211
			1 RB	0	Bottom side*	0	23230	782	20.50	20.47	0.69%	0.900	0.906	-
			IIVD	25	Bottom side	0	23230	782	20.50	20.48	0.46%	0.865	0.869	-
LTE Band13	10MHz	QPSK		49	Bottom side	0	23230	782	20.50	20.46	0.93%	0.771	0.778	-
LIL Danuis	TOWN 12	QFSK		0	Bottom side	0	23230	782	20.50	20.17	7.89%	0.820	0.885	-
			25 RB	12	Bottom side	0	23230	782	20.50	19.92	14.29%	0.785	0.897	-
				25	Bottom side	0	23230	782	20.50	19.94	13.76%	0.711	0.809	-
			50	RB	Bottom side	0	23230	782	20.50	19.94	13.76%	0.811	0.923	-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 183 of 328

LTE FDD Band 17 (without power reduction)

Mode	Bandwidth (MHz)	Modulation	PR Siza	PR start	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measured Avg. Power	Scaling	Averaged 1g (V		Plot
ivioue	(MHz)	viodulation	ND SIZE	ND Start	i osition	(mm)	GIT	(MHz)	Max. Toleranc e (dBm)	(dBm)		Measured	Reported	page
			1 RB	49	Bottom side	14	23780	709	24.00	23.12	22.46%	0.369	0.452	-
LTE Band 17	10MHz	QPSK	25 RB	25	Bottom side	14	23800	711	23.00	22.10	23.03%	0.349	0.429	-
			50	RB	Bottom side	14	23790	710	23.00	22.17	21.06%	0.348	0.421	

LTE FDD Band 17 (with power reduction)

Mode	Bandwidth	Modulation	RR Siza	RR start	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measured Avg. Power	Scaling		SAR over V/kg)	Plot
ivioue	(MHz)	viodulatioi	ND SIZE	ND Start	rosidori	(mm)	GH	(MHz)	Max. Toleranc e (dBm)	(dBm)	ŭ	Measured	Reported	page
					Bottom side	0	23780	709	19.50	19.34	3.75%	0.828	0.859	212
			1 RB	49	Bottom side*	0	23780	709	19.50	19.34	3.75%	0.819	0.850	-
			IND	43	Bottom side	0	23790	710	19.50	19.29	4.95%	0.679	0.713	-
LTE Band17	10MHz	QPSK			Bottom side	0	23800	711	19.50	19.48	0.46%	0.809	0.813	-
LIL Balluli	I OIVII IZ	QFOR			Bottom side	0	23780	709	19.50	19.34	3.75%	0.809	0.839	-
			25 RB	25	Bottom side	0	23790	710	19.50	19.35	3.51%	0.676	0.700	-
					Bottom side	0	23800	711	19.50	19.30	4.71%	0.797	0.835	-
			50	RB	Bottom side	0	23800	711	19.50	19.35	3.51%	0.762	0.789	-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 184 of 328

LTE FDD Band 26 (without power reduction)

Mode	Bandwidth	Modulation	DR Siza	PR etart	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measured Avg.	Scaling		SAR over V/kg)	Plot
ivioue	(MHz)	viodulatioi	ND SIZE	ND Start	i osidori	(mm)	OH	(MHz)	Max. Tolerance (dBm)	Power (dBm)		Measured	Reported	page
			1 RB	0	Bottom side	14	26825	822.5	24.00	23.11	22.74%	0.358	0.439	-
LTE Band26	15MHz	QPSK	36 RB	0	Bottom side	14	26865	831.5	23.00	22.15	21.62%	0.338	0.411	-
			75	RB	Bottom side	14	26825	822.5	23.00	22.20	20.23%	0.336	0.404	•

LTE FDD Band 26 (with power reduction)

Mode	Bandwidth	Modulation	DD Ciro	DP start	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measured Avg.		_	SAR over V/kg)	Plot
ivioue	(MHz)	viodulatioi	ND SIZE	ND Start	FUSILIUIT	(mm)	GH	(MHz)	Max. Tolerance (dBm)	Power (dBm)	Scaling	Measured	Reported	page
				36	Bottom side	0	26825	822.5	21.00	20.83	3.99%	0.956	0.994	-
			1 RB	74	Bottom side	0	26865	831.5	21.00	20.77	5.44%	0.952	1.004	-
				74	Bottom side	0	26965	841.5	21.00	20.83	3.99%	0.784	0.815	-
					Bottom side	0	26825	822.5	21.00	20.97	0.69%	0.971	0.978	-
LTE Band26	15MHz	QPSK	36 RB	0	Bottom side	0	26865	831.5	21.00	20.81	4.47%	0.977	1.021	213
LTE Balluzo	TOWINZ	QFSK	30 KB		Bottom side*	0	26865	831.5	21.00	20.81	4.47%	0.973	1.017	-
				18	Bottom side	0	26965	841.5	21.00	20.67	7.89%	0.857	0.925	-
					Bottom side	0	26825	822.5	21.00	20.97	0.69%	0.875	0.881	-
			75	RB	Bottom side	0	26865	831.5	21.00	20.90	2.33%	0.935	0.957	-
					Bottom side	0	26965	841.5	21.00	20.85	3.51%	0.753	0.779	-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

f (886-2) 2298-0488 www.tw.sgs.com



Page: 185 of 328

LTE FDD Band 30 (without power reduction)

Mode	Bandwidth	Modulation	RR Siza	RR start	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measured Avg.	Scaling	Averaged 1g (V	SAR over V/kg)	Plot
Widde	(MHz)	viodulation	ND 0126	ND Start	i osidon	(mm)	5	(MHz)	Max. Tolerance (dBm)	Power (dBm)	· ·	Measured	Reported	page
			1 RB	0	Bottom side	14	27710	2310	24.00	23.44	13.76%	0.426	0.485	1
LTE Band30	10MHz	QPSK	25 RB	0	Bottom side	14	27710	2310	23.00	22.51	11.94%	0.401	0.449	1
			50	RB	Bottom side	14	27710	2310	23.00	22.31	17.22%	0.411	0.482	

LTE FDD Band 30 (with power reduction)

Mode	Bandwidth	Modulation	DD Cizo	DP start	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measured Avg.	Scaling		SAR over V/kg)	Plot
ivioue	(MHz)	viodulatioi	ND SIZE	ND Start	POSITION	(mm)	СП	(MHz)	Max. Tolerance (dBm)	Power (dBm)	ŭ	Measured	Reported	page
				0	Bottom side	0	27710	2310	17.00	16.97	0.69%	0.891	0.897	-
			1 RB	25	Bottom side	0	27710	2310	17.00	16.64	8.64%	1.070	1.162	-
				49	Bottom side	0	27710	2310	17.00	16.63	8.89%	0.845	0.920	-
LTE Band30	15MHz	QPSK		0	Bottom side	0	27710	2310	17.00	16.83	3.99%	0.838	0.871	-
LTL Balluso	1 JIVII IZ	QI SIN	25 RB	12	Bottom side	0	27710	2310	17.00	16.79	4.95%	0.967	1.015	-
				25	Bottom side	0	27710	2310	17.00	16.65	8.39%	0.840	0.910	-
			50	RB	Bottom side	0	27710	2310	17.00	16.96	0.93%	1.160	1.171	214
			30	IND	Bottom side*	0	27710	2310	17.00	16.96	0.93%	1.110	1.120	-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 186 of 328

LTE TDD Band 38 (without power reduction)

	Mode	Bandwidth	Modulation	PR Siza	PR start	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measure d Avg.	Scaling	Averaged 1g (V		Plot
	Mode	(MHz)	viodulation	ND SIZE	ND Start	i ostion	(mm)	OH	(MHz)	Max. Toleranc e (dBm)	Power (dBm)		Measured	Reported	page
ĺ				1 RB	0	Bottom side	14	37850	2580	24.00	23.09	23.31%	0.508	0.626	-
	LTE Band38	20MHz	QPSK	50RB	50	Bottom side	14	38150	2610	23.00	22.11	22.74%	0.488	0.599	-
				100)RB	Bottom side	14	38150	2610	23.00	22.14	21.90%	0.474	0.578	-

LTE TDD Band 38 (with power reduction)

Mode	Bandwidth	Modulation	DD Sizo	DR start	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measure d Avg.	Scaling		SAR over N/kg)	Plot
Mode	(MHz)	viodulatioi	ND SIZE	ND Start	FOSILIOIT	(mm)	СП	(MHz)	Max. Toleranc e (dBm)	Power	Scaling	Measured	Reported	page
				0	Bottom side	0	37850	2580	20.00	19.96	0.93%	1.230	1.241	-
			1 RB	U	Bottom side	0	38150	2610	20.00	19.91	2.09%	1.040	1.062	-
				99	Bottom side	0	38000	2595	20.00	19.87	3.04%	1.080	1.113	-
LTE Band38	20MHz	QPSK			Bottom side	0	37850	2580	20.00	19.83	3.99%	1.191	1.239	215
			50 RB	0	Bottom side*	0	37850	2580	20.00	19.96	0.93%	1.120	1.130	-
			SURB		Bottom side	0	38000	2595	20.00	19.77	5.44%	0.897	0.946	-
				50	Bottom side	0	38150	2610	20.00	19.72	6.66%	0.967	1.031	-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 187 of 328

LTE TDD Band 41 (without power reduction)

Mode	Bandwidth	Modulation	DR Sizo	DB start	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measure d Avg.	Scaling	Averaged 1g (V		Plot
Wode	(MHz)	viodulatioi	ND SIZE	ND Start	FUSILIUIT	(mm)	СП	(MHz)	Max. Toleranc e (dBm)	Power	· ·	Measured	Reported	page
			1 RB	0	Bottom side	14	41055	2636.5	24.00	23.39	15.08%	0.378	0.435	-
LTE Band41	20MHz	QPSK	50 RB	0	Back side	14	41055	2636.5	23.00	22.35	16.14%	0.351	0.408	-
			100)RB	Left side	14	41055	2636.5	23.00	22.30	17.49%	0.355	0.417	-

LTE TDD Band 41 (with power reduction)

Mode	Bandwidth	M - do de di - o	DD Ci	DD start	Position	Distance	СН	Freq.	Max. Rated Avg.	Measure d	Caslina	_	SAR over V/kg)	Plot
iviode	(MHz)	Modulation	RB Size	RB Start	Position	(mm)	Сп	(MHz)	Power + Max. Toleranc e (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	page
					Bottom side	0	39750	2506	19.00	18.83	3.99%	1.060	1.102	-
				0	Bottom side	0	40620	2593	19.00	18.65	8.39%	1.020	1.106	-
			1 RB		Bottom side	0	41490	2680	19.00	18.62	9.14%	0.998	1.089	-
			IIND	50	Bottom side	0	41055	2636.5	19.00	18.98	0.46%	1.120	1.125	216
				30	Bottom side*	0	41055	2636.5	19.00	18.98	0.46%	1.090	1.095	-
				99	Bottom side	0	40185	2549.5	19.00	18.90	2.33%	0.979	1.002	-
				0	Bottom side	0	39750	2506	19.00	18.46	13.24%	0.990	1.121	-
LTE Band41	20MHz	QPSK		25	Bottom side	0	40620	2593	19.00	18.51	11.94%	0.905	1.013	-
LIE Balloti	ZOWITIZ	QI OIX	50 RB	20	Bottom side	0	41055	2636.5	19.00	18.85	3.51%	1.043	1.080	-
				50	Bottom side	0	40185	2549.5	19.00	18.76	5.68%	0.977	1.033	-
				30	Bottom side	0	41490	2680	19.00	18.30	17.49%	0.859	1.009	-
					Bottom side	0	39750	2506	19.00	18.46	13.24%	0.854	0.967	-
					Bottom side	0	40185	2549.5	19.00	18.76	5.68%	0.852	0.900	-
			100	RB	Bottom side	0	40620	2593	19.00	18.54	11.17%	0.857	0.953	-
					Bottom side	0	41055	2636.5	19.00	18.86	3.28%	0.899	0.928	-
					Bottom side	0	41490	2680	19.00	18.34	16.41%	0.761	0.886	-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 188 of 328

LTE FDD Band 66 (without power reduction)

Mode	Bandwidth	Modulation	DR Sizo	PR etart	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measure d Avg.	Scaling	Averaged 1g (V	SAR over V/kg)	Plot
Woue	(MHz)	viouulatioi	ND SIZE	ND Start	FUSILIUII	(mm)	OII	(MHz)	Max. Toleranc e (dBm)	Power		Measured	Reported	page
			1 RB	99	Bottom side	14	132322	1745	24.00	23.50	12.20%	0.530	0.595	-
LTE Band 66	20MHz	QPSK	50 RB	50	Bottom side	14	132322	1745	23.00	22.38	15.35%	0.482	0.556	-
			100	RB	Bottom side	14	132572	1770	23.00	22.54	11.17%	0.493	0.548	-

LTE FDD Band 66 (with power reduction)

Mode	Bandwidth	Modulation	DD Sizo	DR start	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measure d Avg.	Scaling		SAR over V/kg)	Plot
ivioue	(MHz)	viodulatioi	ND Size	ND start	1 Oslubii	(mm)	GIT	(MHz)	Max. Toleranc e (dBm)	Power	ŭ	Measured	Reported	page
				50	Bottom side	0	132072	1720	17.50	17.34	3.75%	1.020	1.058	-
			1 RB	50	Bottom side	0	132322	1745	17.50	17.23	6.41%	1.030	1.096	-
			TIND	99	Bottom side	0	132572	1770	17.50	17.47	0.69%	1.160	1.168	217
				33	Bottom side*	0	132572	1770	17.50	17.47	0.69%	1.110	1.118	-
LTE Band66	20MHz	QPSK		0	Bottom side	0	132572	1770	17.50	17.39	2.57%	1.031	1.057	-
LIE Balluoo	ZUIVII IZ	QFSK	50 RB	25	Bottom side	0	132072	1720	17.50	17.19	7.40%	0.903	0.970	-
				50	Bottom side	0	132322	1745	17.50	17.41	2.09%	0.945	0.965	-
					Bottom side	0	132072	1720	17.50	17.36	3.28%	0.848	0.876	-
			100	RB	Bottom side	0	132322	1745	17.50	17.38	2.80%	0.857	0.881	-
					Bottom side	0	132572	1770	17.50	17.45	1.16%	0.907	0.918	-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 189 of 328

WLAN Main Antenna

Antenna	Mode	Position	Distance	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	·	Plot
			(mm)		(IVIITIZ)	Tolerance (dBm)	(dBm)		Measured	Reported	page
	WLAN 802.11b	Bottom sdie	0	6	2437	17.5	17.44	101.39%	0.019	0.019	218
	WLAN 802.11n(40M) 5.2G	Bottom sdie	0	46	5230	16.5	16.48	100.46%	0.031	0.031	219
	WLAN 802.11n(40M) 5.3G	Bottom sdie	0	54	5270	16.5	16.47	100.69%	0.030	0.030	220
Main	WLAN	Bottom sdie	0	106	5530	13.5	13.35	103.51%	0.015	0.016	-
	802.11ac(80M)	Bottom sdie	0	122	5610	16.5	16.23	106.41%	0.061	0.065	-
	5.6G	Bottom sdie	0	138	5690	16.5	16.48	100.46%	0.070	0.070	221
	WLAN 802.1ac(80M) 5.8G	Bottom sdie	0	155	5775	16.5	16.49	100.23%	0.047	0.047	222

WLAN Aux Antenna

· · · · · · · · · · · · · · · · · · ·	Aux Antonn	u									
Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	AR over 1g (kg)	Plot page
			(111111)		(1711 12)	Tolerance (dBm)	(dBm)		Measured	Reported	page
	WLAN 802.11b	Bottom sdie	0	6	2437	17.5	17.49	100.23%	0.013	0.013	223
	Bluetooth(GFSK)	Bottom sdie	0	0	2412	5.1	4.37	118.30%	0.001	0.001	224
	WLAN 802.11n(40M) 5.2G	Bottom sdie	0	46	5230	16.5	16.49	100.23%	0.023	0.023	225
Aux	WLAN 802.11n(40M) 5.3G	Bottom sdie	0	54	5270	16.5	16.47	100.69%	0.024	0.024	226
	WLAN 802.11ac(80M)	Bottom sdie	0	138	5690	16.5	16.48	100.46%	0.043	0.043	227
	WLAN 802.1ac(80M) 5.8G	Bottom sdie	0	155	5775	16.5	16.46	100.93%	0.024	0.024	228

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 190 of 328

3. Simultaneous Transmission Analysis

Simultaneous Transmission Scenarios:

NO.	Simultaneous Transmit Configurations	Body
1	UMTS + 2.4GHz WLAN Main / 2.4GHz WLAN Aux / 2.4GHz MIMO	YES
2	UMTS + 5GHz WLAN Main / 5GHz WLAN Aux / 5GHz MIMO	YES
3	UMTS + BT	YES
4	UMTS + 2.4/5GHz WLAN Maiin + BT	YES
5	LTE + 2.4GHz WLAN Main / 2.4GHz WLAN Aux / 2.4GHz MIMO	YES
6	LTE + 5GHz WLAN Main / 5GHz WLAN Aux / 5GHz MIMO	YES
7	LTE + BT	YES
8	LTE + 2.4/5GHz WLAN Main + BT	YES

Note:

- 1) WWAN and WLAN may transmit simultaneously.
- 2) Bluetooth and WLAN Aux share the same antenna path.
- 3) Bluetooth can transmit with WLAN Main simultaneously.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 191 of 328

3.1 Estimated SAR calculation

According to KDB447498 D01 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

Estimated SAR =
$$\frac{\text{Max.tune up power(mW)}}{\text{Min.test separation distance(mm)}} \times \frac{\sqrt{f(GHz)}}{7.5}$$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 192 of 328

3.2 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by (SAR1 + SAR2)^1.5/Ri, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 193 of 328

WCDMA Band II + 2.4GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
1	WCDMA Band II	Bottom side	0	1.193	0.019	0.013	1.225	ΣSAR<1.6, Not required

WCDMA Band IV + 2.4GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
2	WCDMA Band IV	Bottom side	0	1.042	0.019	0.013	1.074	ΣSAR<1.6, Not required

WCDMA Band V + 2.4GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
3	WCDMA Band V	Bottom side	0	1.052	0.019	0.013	1.084	ΣSAR<1.6, Not required

LTE FDD Band 2 + 2.4GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
4	LTE FDD Band2	Bottom side	0	0.728	0.019	0.013	0.760	ΣSAR<1.6, Not required

LTE FDD Band 5 + 2.4GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
5	LTE FDD Band 5	Bottom side	0	1.015	0.019	0.013	1.047	ΣSAR<1.6, Not required

LTE FDD Band 7 + 2.4GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
6	LTE FDD Band 7	Bottom side	0	1.163	0.019	0.013	1.195	ΣSAR<1.6, Not required

LTE FDD Band 12 + 2.4GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
7	LTE FDD Band 12	Bottom side	0	0.909	0.019	0.013	0.941	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



ΣSAR<1.6,

Not required

Page: 194 of 328

0.891

0.013

LTE FDD Band 13 + 2.4GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR	
8	LTE FDD Band 13	Bottom side	0	0.923	0.019	0.013	0.955	Analyzed as below	
LTE FDD Band 17 + 2.4GHz WLAN MIMO									
No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	Max. WLAN Aux	SAR Sum	SPLSR	

Main

0.019

LTE FDD Band 26 + 2.4GHz WLAN MIMO

n

LTE FDD Band 17 Bottom side

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
10	LTE FDD Band 26	Bottom side	0	1.021	0.019	0.013	1.053	ΣSAR<1.6, Not required

0.859

LTE FDD Band 30 + 2.4GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
11	LTE FDD Band 30	Bottom side	0	1.171	0.019	0.013	1.203	ΣSAR<1.6, Not required

LTE FDD Band 38 + 2.4GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
12	LTE FDD Band 38	Bottom side	0	1.239	0.019	0.013	1.271	ΣSAR<1.6, Not required

LTE TDD Band 41 + 2.4GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
13	LTE FDD Band 41	Bottom side	0	1.125	0.019	0.013	1.157	ΣSAR<1.6, Not required

LTE FDD Band 66 + 2.4GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
14	LTE FDD Band 66	Bottom side	0	1.168	0.019	0.013	1.200	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 195 of 328

WCDMA Band II + 5GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
15	WCDMA Band II	Bottom side	0	1.193	0.070	0.043	1.306	ΣSAR<1.6, Not required

WCDMA Band IV + 5GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
16	WCDMA Band IV	Bottom side	0	1.042	0.070	0.043	1.155	ΣSAR<1.6, Not required

WCDMA Band V + 5GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
17	WCDMA Band V	Bottom side	0	1.052	0.070	0.043	1.165	ΣSAR<1.6, Not required

LTE FDD Band 2 + 5GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
18	LTE FDD Band 2	Bottom side	0	0.728	0.070	0.043	0.841	ΣSAR<1.6, Not required

LTE FDD Band 5 + 5GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
19	LTE FDD Band 5	Bottom side	0	1.015	0.070	0.043	1.128	ΣSAR<1.6, Not required

LTE FDD Band 7 + 5GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
20	LTE FDD Band 7	Bottom side	0	1.163	0.070	0.043	1.276	ΣSAR<1.6, Not required

LTE FDD Band 12 + 5GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
21	LTE FDD Band 12	Bottom side	0	0.909	0.070	0.043	1.022	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 196 of 328

LTE FDD Band 13 + 5GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
22	LTE FDD Band 13	Bottom side	0	0.923	0.070	0.043	1.036	ΣSAR<1.6, Not required

LTE FDD Band 17 + 5GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
23	LTE FDD Band 17	Bottom side	0	0.859	0.070	0.043	0.972	ΣSAR<1.6, Not required

LTE FDD Band 26 + 5GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
24	LTE FDD Band 26	Bottom side	0	1.021	0.070	0.043	1.134	ΣSAR<1.6, Not required

LTE FDD Band 30 + 5GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
25	LTE FDD Band 30	Bottom side	0	1.171	0.070	0.043	1.284	ΣSAR<1.6, Not required

LTE FDD Band 38 + 5GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
26	LTE FDD Band 38	Bottom side	0	1.239	0.070	0.043	1.352	ΣSAR<1.6, Not required

LTE TDD Band 41 + 5GHz WLAN MIMO

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
27	LTE FDD Band 41	Bottom side	0	1.125	0.070	0.043	1.238	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

除非另有説明,此報告結果僅對測試乙樣品負責,同時此樣品僅保留兒大。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 197 of 328

LTE FDD Band 66 + 5GHz WLAN MIMO

1	No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
:	28	LTE FDD Band 66	Bottom side	0	1.168	0.070	0.043	1.281	ΣSAR<1.6, Not required

WCDMA Band II + 2.4GHz WLAN Main + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
29	WCDMA Band II	Bottom side	0	1.193	0.019	0.001	1.213	ΣSAR<1.6, Not required

WCDMA Band IV + 2.4GHz WLAN Main + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
30	WCDMA Band IV	Bottom side	0	1.042	0.019	0.001	1.062	ΣSAR<1.6, Not required

WCDMA Band V + 2.4GHz WLAN Main + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
31	WCDMA Band V	Bottom side	0	1.052	0.019	0.001	1.072	ΣSAR<1.6, Not required

LTE FDD Band 2 + 2.4GHz WLAN Main + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
32	LTE FDD Band 2	Bottom side	0	0.728	0.019	0.001	0.748	ΣSAR<1.6, Not required

LTE FDD Band 5 + 2.4GHz WLAN Main + BT

I	No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
	33	LTE FDD Band 5	Bottom side	0	1.015	0.019	0.001	1.035	ΣSAR<1.6, Not required

LTE FDD Band 7 + 2.4GHz WLAN Main + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
34	LTE FDD Band 7	Bottom side	0	1.163	0.019	0.001	1.183	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 198 of 328

ITF	FDD	Rand	12 ± 2	2.4GHz	WI	ΔΝΙ	Main ⊥	RT
	ı DD	Danu	14 T 4	4GI 1Z	~~ _	~IX I	viaili T	

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
35	LTE FDD Band 12	Bottom side	0	0.909	0.019	0.001	0.929	ΣSAR<1.6, Not required

LTE FDD Band 13 + BT + 2.4GHz WLAN Aux

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
36	LTE FDD Band 13	Bottom side	0	0.923	0.019	0.001	0.943	ΣSAR<1.6, Not required

LTE FDD Band 17 + 2.4GHz WLAN Main + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
37	LTE FDD Band 17	Bottom side	0	0.859	0.019	0.001	0.879	ΣSAR<1.6, Not required

LTE FDD Band 26 + 2.4GHz WLAN Main + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
38	LTE FDD Band 26	Bottom side	0	1.021	0.019	0.001	1.041	ΣSAR<1.6, Not required

LTE FDD Band 30 + 2.4GHz WLAN Main + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
39	LTE FDD Band 30	Bottom side	0	1.171	0.019	0.001	1.191	ΣSAR<1.6, Not required

LTE FDD Band 38 + 2.4GHz WLAN Main + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
40	LTE FDD Band 38	Bottom side	0	1.239	0.019	0.001	1.259	ΣSAR<1.6, Not required

LTE FDD Band 41 + 2.4GHz WLAN Main + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
41	LTE FDD Band 41	Bottom side	0	1.125	0.019	0.001	1.145	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 199 of 328

LTE FDD Band 66 + 2.4GHz WLAN Main + BT

Ν	lo.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
4	12	LTE FDD Band 66	Bottom side	0	1.168	0.019	0.001	1.188	ΣSAR<1.6, Not required

WCDMA Band II + 5GHz WLAN Main + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
43	WCDMA Band II	Bottom side	0	1.193	0.070	0.001	1.264	ΣSAR<1.6, Not required

WCDMA Band IV + 5GHz WLAN Main + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
44	WCDMA Band IV	Bottom side	0	1.042	0.070	0.001	1.113	ΣSAR<1.6, Not required

WCDMA Band V + 5GHz WLAN Main + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
45	WCDMA Band V	Bottom side	0	1.052	0.070	0.001	1.123	ΣSAR<1.6, Not required

LTE FDD Band 2 + 5GHz WLAN Main + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
46	LTE FDD Band 2	Bottom side	0	0.728	0.070	0.001	0.799	ΣSAR<1.6, Not required

LTE FDD Band 5 + 5GHz WLAN Main + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
47	LTE FDD Band 5	Bottom side	0	1.015	0.070	0.001	1.086	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 200 of 328

LTE FDD Band 7 + 5GHz WLAN Main + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
48	LTE FDD Band 7	Bottom side	0	1.163	0.070	0.001	1.234	ΣSAR<1.6, Not required

LTE FDD Band 12 + 5GHz WLAN Main + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
49	LTE FDD Band 12	Bottom side	0	0.909	0.070	0.001	0.980	ΣSAR<1.6, Not required

LTE FDD Band 13 + 5GHz WLAN Main + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
50	LTE FDD Band 13	Bottom side	0	0.923	0.070	0.001	0.994	ΣSAR<1.6, Not required

LTE FDD Band 17 + 5GHz WLAN Main + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
51	LTE FDD Band 17	Bottom side	0	0.859	0.070	0.001	0.930	ΣSAR<1.6, Not required

LTE FDD Band 26 + 5GHz WLAN Main + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
52	LTE FDD Band 26	Bottom side	0	1.021	0.070	0.001	1.092	ΣSAR<1.6, Not required

LTE FDD Band 30 + 5GHz WLAN Main + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
53	LTE FDD Band 30	Bottom side	0	1.171	0.070	0.001	1.242	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 201 of 328

LTE FDD Band 38 + 5GHz WLAN Main + BT

N	c. Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
5	LTE FDD Band 38	Bottom side	0	1.239	0.070	0.001	1.310	ΣSAR<1.6, Not required

LTE FDD Band 41 + 5GHz WLAN Main + BT

No	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
55	LTE FDD Band 41	Bottom side	0	1.125	0.070	0.001	1.196	ΣSAR<1.6, Not required

LTE FDD Band 66 + 5GHz WLAN Main + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
56	LTE FDD Band 66	Bottom side	0	1.168	0.070	0.001	1.239	ΣSAR<1.6, Not required

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is ≤ 0.04 for all circumstances that require SPLSR calculation.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

> t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 202 of 328

4. Instruments List

Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
Schmid & Partner Engineering AG	Dosimetric E-Field Probe	EX3DV4	7351	Dec.21,2017	Dec.20,2018
	System Validation Dipole	D750V2	1015	Aug.21,2017	Aug.20,2018
		D835V2	4d063	Aug.21,2017	Aug.20,2018
		D1750V2	1008	Aug.21,2017	Aug.20,2018
Schmid & Partner		D1900V2	5d173	May.31,2017	May.30,2018
Engineering AG		D2300V2	1023	Aug.17,2017	Aug.16,2018
		D2450V2	727	Apr.21,2017	Apr.20,2018
		D2600V2	1005	Jan.25,2017	Jan.24,2018
		D5GHzV2	1023	Jan.20,2017	Jan.19,2018
Schmid & Partner Engineering AG	Data acquisition Electronics	DAE4	547	Mar.22,2017	Mar.21,2017
Schmid & Partner Engineering AG	Software	DASY 52 V52.8.8	N/A	Calibration not required	Calibration not required
Schmid & Partner Engineering AG	Phantom	ELI	N/A	Calibration not required	Calibration not required
Agilent	Network Analyzer	E5071C	MY46107530	Jan.20,2017	Jan.19,2018
Agilent	Dielectric Probe Kit	85070E	MY44300677	Calibration not required	Calibration not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 203 of 328

			Serial	Date of last	Date of next
Manufacturer	Device	Type	number	calibration	calibration
		772D			
Agilent	Dual-directional coupler	7720	MY52180142	Apr. 13,2017	Apr. 12,2016
/ tgilorit		778D	MY52180302	Apr.13,2017	Apr.12,2018
A	RF Signal	NEAGAA	10/50444440	Mar.01,2017	E 1 00 0040
Agilent	Generator	N5181A	MY50144143		Feb.28,2018
Agilent	Power Meter	E4417A	MY52240003	Dec.21,2017	Doc 20 2018
Agilent	1 OWEI MICKEI				Dec.20,2016
	Power Sensor	E9301H	MY52200003	Dec.21,2017	Dec.20,2018
Agilent			MY52200004	Dec.21,2017	Dec.20,2018
TECPEL	Digital thermometer	DTM-303A	TP130075	Mar.09,2017	Mar.08,2018
	Radio				
Anritsu	Communication	E5515C	GB44051912	Aug.23,2017	Aug.22,2018
	Test				
	Radio				
R&S	Communication	CMW 500	125470	Aug.22,2017	Aug.21,2018
	Test				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_end_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this onlineful.

f (886-2) 2298-0488

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 204 of 328

5. Measurements

Date: 2018/1/10

WCDMA Band II_Body_Bottom side_CH 9262_0mm

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1852.4 MHz; $\sigma = 1.499 \text{ S/m}$; $\epsilon_r = 53.283$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.8°C; Liquid temperature: 21.4°C

DASY5 Configuration:

Probe: EX3DV4 - SN7351; ConvF(8.22, 8.22, 8.22); Calibrated: 2017/12/21;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2017/3/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (101x61x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 2.06 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 0.3730 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.55 W/kg

SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.532 W/kg

Maximum value of SAR (measured) = 1.59 W/kg

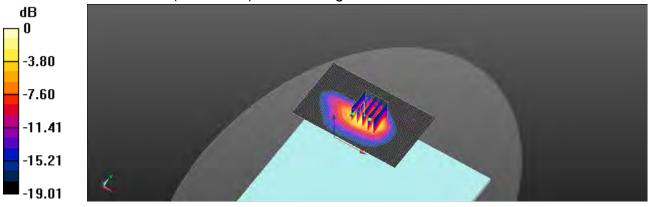

0 dB = 1.59 W/kg = 2.03 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 205 of 328

Date: 2018/1/9

WCDMA Band IV_Body_Bottom side_CH 1513_0mm

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1753 MHz; $\sigma = 1.451$ S/m; $\varepsilon_r = 53.546$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 SN7351; ConvF(8.58, 8.58, 8.58); Calibrated: 2017/12/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (101x61x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 1.80 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dv=8mm. dz=5mm

Reference Value = 0.5270 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 2.16 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.481 W/kg

Maximum value of SAR (measured) = 1.46 W/kg

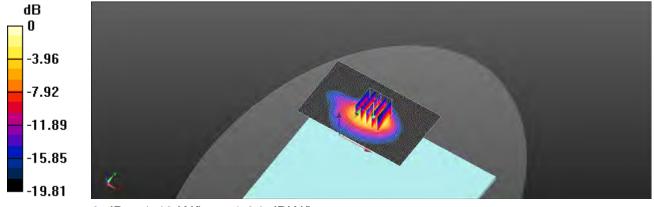

0 dB = 1.46 W/kg = 1.64 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 206 of 328

Date: 2018/1/8

WCDMA Band V_Body_Bottom side_CH 4132_0mm

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used: f = 826.4 MHz; $\sigma = 1.005 \text{ S/m}$; $\varepsilon_r = 55.174$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 SN7351; ConvF(10.39, 10.39, 10.39); Calibrated: 2017/12/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (101x61x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 1.38 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,

dv=8mm. dz=5mm

Reference Value = 0.7650 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.85 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.651 W/kg

Maximum value of SAR (measured) = 1.48 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm,

dv=8mm. dz=5mm

Reference Value = 0.7650 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.529 W/kgMaximum value of SAR (measured) = 1.33 W/kg

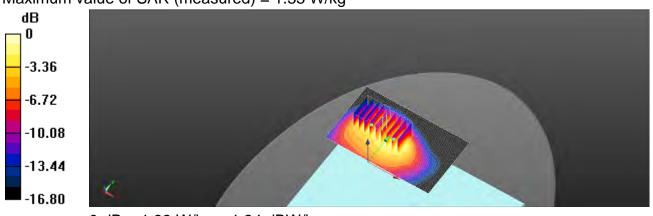

0 dB = 1.33 W/kg = 1.24 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 207 of 328

Date: 2018/1/10

LTE Band 2 (20MHz)_Body_Bottom side_CH 18700_QPSK_1-0_0mm

Communication System: WCDMA; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1860 MHz; $\sigma = 1.502 \text{ S/m}$; $\epsilon_r = 53.198$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN7351; ConvF(8.22, 8.22, 8.22); Calibrated: 2017/12/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (101x61x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 1.58 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 0.4260 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.48 W/kg

SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.478 W/kg

Maximum value of SAR (measured) = 1.53 W/kg

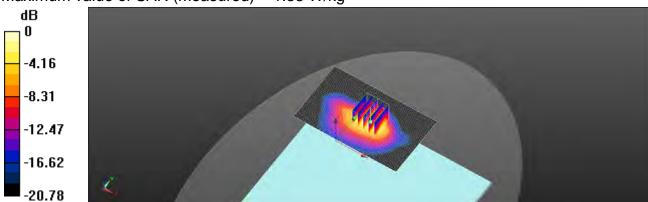

0 dB = 1.53 W/kg = 1.84 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 208 of 328

Date: 2018/1/8

LTE Band 5 (10MHz) Body Bottom side CH 20450 QPSK 1-0 0mm

Communication System: LTE; Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: f = 829 MHz; $\sigma = 1.006$ S/m; $\varepsilon_r = 55.093$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7351; ConvF(10.39, 10.39, 10.39); Calibrated: 2017/12/21;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2017/3/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (101x61x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 1.28 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,

dy=8mm, dz=5mm

Reference Value = 0.4140 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.623 W/kg

Maximum value of SAR (measured) = 1.43 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm,

dy=8mm, dz=5mm

Reference Value = 0.4140 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 1 W/kg; SAR(10 g) = 0.536 W/kgMaximum value of SAR (measured) = 1.48 W/kg

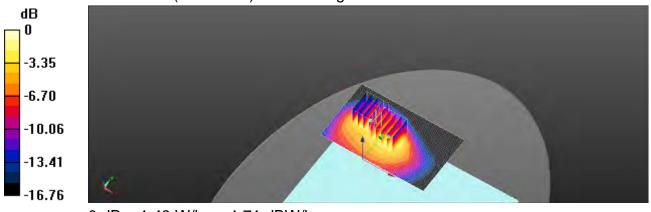

0 dB = 1.48 W/kg = 1.71 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 209 of 328

Date: 2018/1/15

LTE Band 7 (20MHz) Body Bottom side CH 21100 QPSK 1-0 0mm

Communication System: LTE; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2535 MHz; $\sigma = 2.044$ S/m; $\varepsilon_r = 52.53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN7351; ConvF(7.56, 7.56, 7.56); Calibrated: 2017/12/21;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2017/3/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (121x71x1): Interpolated grid: dx=12 mm, dy=12 mm Maximum value of SAR (interpolated) = 2.21 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,

dv=5mm. dz=5mm

Reference Value = 0.4260 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.74 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.478 W/kg

Maximum value of SAR (measured) = 1.75 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm,

dv=5mm. dz=5mm

Reference Value = 0.426 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 3.06 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.432 W/kgMaximum value of SAR (measured) = 2.00 W/kg

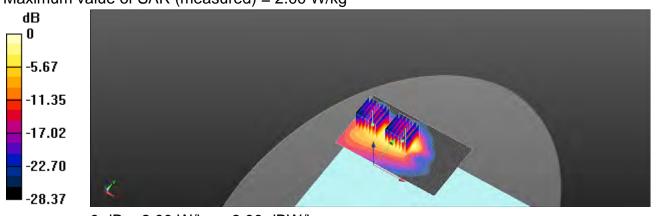

0 dB = 2.00 W/kg = 3.00 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 210 of 328

Date: 2018/1/5

LTE Band 12 (10MHz)_Body_Bottom side_CH 23130_QPSK_1-0_0mm

Communication System: LTE; Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: f = 711 MHz; $\sigma = 0.937$ S/m; $\varepsilon_r = 56.216$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 SN7351; ConvF(10.81, 10.81, 10.81); Calibrated: 2017/12/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (101x61x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 1.07 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,

dy=8mm, dz=5mm

Reference Value = 1.158 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.858 W/kg; SAR(10 g) = 0.497 W/kg

Maximum value of SAR (measured) = 1.23 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm,


dv=8mm. dz=5mm

Reference Value = 1.158 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.837 W/kg; SAR(10 g) = 0.430 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

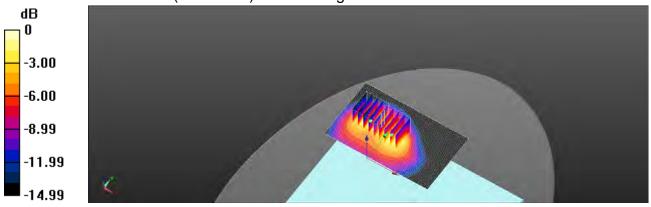

0 dB = 1.12 W/kg = 0.51 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 211 of 328

Date: 2018/1/5

LTE Band 13 (10MHz) Body Bottom side CH 23230 QPSK 1-0 0mm

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: f = 782 MHz; $\sigma = 0.976 \text{ S/m}$; $\varepsilon_r = 55.52$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 SN7351; ConvF(10.81, 10.81, 10.81); Calibrated: 2017/12/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (101x61x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 1.23 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,

dv=8mm. dz=5mm

Reference Value = 64.26 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.903 W/kg; SAR(10 g) = 0.558 W/kg

Maximum value of SAR (measured) = 1.26 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm,


dv=8mm. dz=5mm

Reference Value = 64.26 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.883 W/kg; SAR(10 g) = 0.455 W/kg

Maximum value of SAR (measured) = 1.19 W/kg

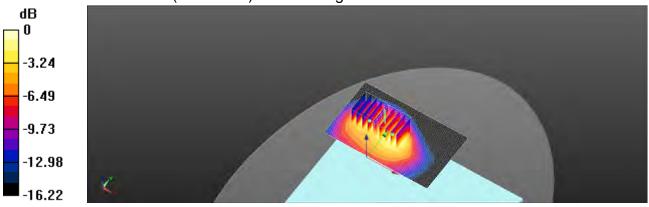

0 dB = 1.19 W/kg = 0.76 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 212 of 328

Date: 2018/1/5

LTE Band 17 (10MHz) Body Bottom side CH 23780 QPSK 1-49 0mm

Communication System: LTE; Frequency: 709 MHz; Duty Cycle: 1:1

Medium parameters used: f = 709 MHz; $\sigma = 0.938$ S/m; $\varepsilon_r = 56.226$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 SN7351; ConvF(10.81, 10.81, 10.81); Calibrated: 2017/12/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (101x61x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 1.03 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,

dv=8mm. dz=5mm

Reference Value = 1.230 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.828 W/kg; SAR(10 g) = 0.476 W/kg

Maximum value of SAR (measured) = 1.20 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm,

dv=8mm. dz=5mm

Reference Value = 1.230 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.809 W/kg; SAR(10 g) = 0.414 W/kgMaximum value of SAR (measured) = 1.07 W/kg

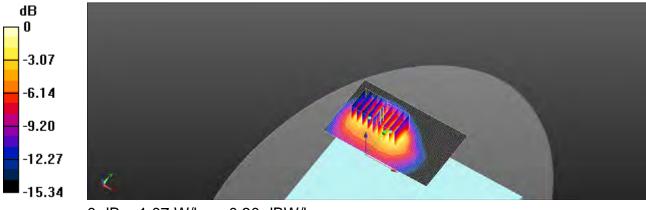

0 dB = 1.07 W/kg = 0.30 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 213 of 328

Date: 2018/1/8

LTE Band 26 (15MHz) Body Bottom side CH 26865 QPSK 36-0 0mm

Communication System: LTE; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used: f = 831.5 MHz; $\sigma = 1.01 \text{ S/m}$; $\varepsilon_r = 55.084$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 SN7351; ConvF(10.39, 10.39, 10.39); Calibrated: 2017/12/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (101x61x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 1.36 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,

dv=8mm. dz=5mm

Reference Value = 23.71 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 0.977 W/kg; SAR(10 g) = 0.611 W/kg

Maximum value of SAR (measured) = 1.33 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm,


dv=8mm. dz=5mm

Reference Value = 23.71 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 0.932 W/kg; SAR(10 g) = 0.485 W/kg

Maximum value of SAR (measured) = 1.28 W/kg

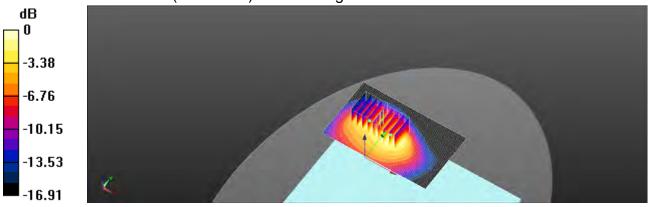

0 dB = 1.28 W/kg = 1.07 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 214 of 328

Date: 2018/1/11

LTE Band 30 (10MHz) Body Bottom side CH 27710 QPSK 50-0 0mm

Communication System: LTE; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2310 MHz; $\sigma = 1.763 \text{ S/m}$; $\varepsilon_r = 53.402$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 SN7351; ConvF(7.98, 7.98, 7.98); Calibrated: 2017/12/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (121x71x1): Interpolated grid: dx=12 mm, dy=12 mm Maximum value of SAR (interpolated) = 2.60 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dv=5mm. dz=5mm

Reference Value = 1.470 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.82 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.443 W/kg

Maximum value of SAR (measured) = 1.95 W/kg

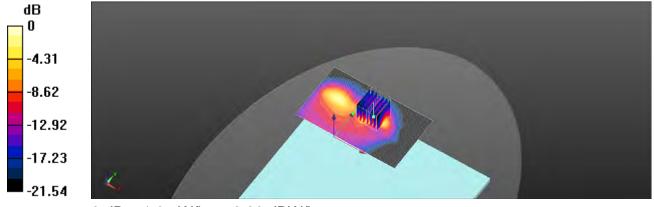

0 dB = 1.95 W/kg = 2.90 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 215 of 328

Date: 2018/1/15

LTE Band 38 (20MHz) Body Bottom side CH 37850 QPSK 1-0 0mm

Communication System: LTE; Frequency: 2580 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2580 MHz; $\sigma = 2.104 \text{ S/m}$; $\varepsilon_r = 52.286$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN7351; ConvF(7.56, 7.56, 7.56); Calibrated: 2017/12/21;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2017/3/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (121x71x1): Interpolated grid: dx=12 mm, dy=12 mm Maximum value of SAR (interpolated) = 2.14 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,

dv=5mm. dz=5mm

Reference Value = 0.4490 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 3.09 W/kg

SAR(1 g) = 1.23 W/kg; SAR(10 g) = 0.459 W/kg

Maximum value of SAR (measured) = 2.08 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm,

dv=5mm. dz=5mm

Reference Value = 0.4490 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 2.58 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.454 W/kgMaximum value of SAR (measured) = 1.69 W/kg

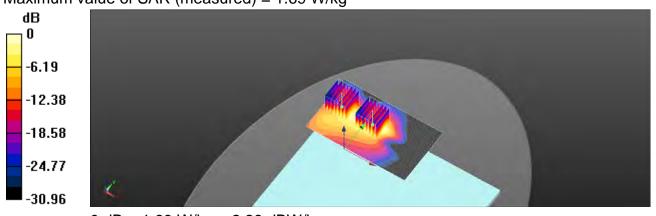

0 dB = 1.69 W/kg = 2.28 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 216 of 328

Date: 2018/1/15

LTE Band 41 (20MHz) Body Bottom side CH 41055 QPSK 1-50 0mm

Communication System: LTE; Frequency: 2636.5 MHz; Duty Cycle: 1:0.633

Medium parameters used: f = 2636.5 MHz; $\sigma = 2.18 \text{ S/m}$; $\epsilon_r = 52.045$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN7351; ConvF(7.56, 7.56, 7.56); Calibrated: 2017/12/21;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2017/3/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (101x71x1): Interpolated grid: dx=12 mm, dy=12 mm Maximum value of SAR (interpolated) = 1.51 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,

dv=5mm. dz=5mm

Reference Value = 1.483 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.80 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.384 W/kg

Maximum value of SAR (measured) = 1.82 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm,

dv=5mm. dz=5mm

Reference Value = 1.483 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.86 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.454 W/kgMaximum value of SAR (measured) = 1.77 W/kg

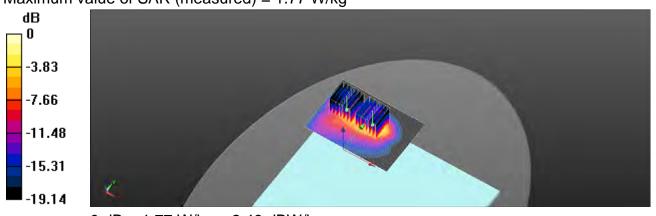

0 dB = 1.77 W/kg = 2.49 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 217 of 328

Date: 2018/1/9

LTE Band 66 (20MHz) Body Bottom side CH 132572 QPSK 1-99 0mm

Communication System: LTE; Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1770 MHz; $\sigma = 1.462 \text{ S/m}$; $\varepsilon_r = 53.521$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 SN7351; ConvF(8.58, 8.58, 8.58); Calibrated: 2017/12/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (101x61x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 2.02 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,

dv=8mm. dz=5mm

Reference Value = 0.2580 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.41 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.540 W/kgMaximum value of SAR (measured) = 1.63 W/kg

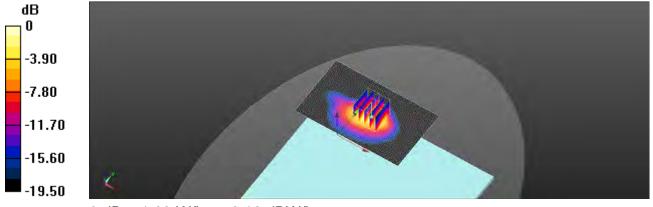

0 dB = 1.63 W/kg = 2.12 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 218 of 328

Date: 2018/1/12

WLAN 802.11b_Body_Bottom side_CH 6_Main_0mm

Communication System: WLAN(2.45G); Frequency: 2437 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2437 MHz; $\sigma = 1.915$ S/m; $\epsilon_r = 52.874$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 SN7351; ConvF(7.82, 7.82, 7.82); Calibrated: 2017/12/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (81x121x1): Interpolated grid: dx=12 mm, dy=12 mm Maximum value of SAR (interpolated) = 0.0274 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,

dy=5mm, dz=5mm

Reference Value = 0.3280 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0400 W/kg

SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.00997 W/kg Maximum value of SAR (measured) = 0.0287 W/kg

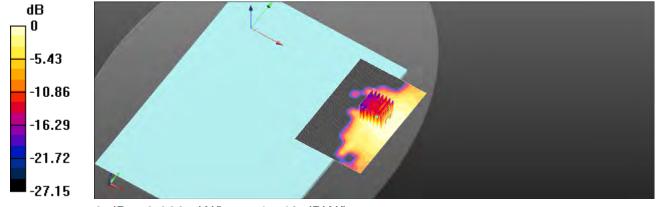

0 dB = 0.0287 W/kg = -15.42 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 219 of 328

Date: 2018/1/16

WLAN 802.11n(40M) 5.2G Body Bottom side CH 46 Main 0mm

Communication System: WLAN(5G); Frequency: 5230 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5230 MHz; $\sigma = 5.19 \text{ S/m}$; $\epsilon_r = 49.559$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 SN7351; ConvF(4.6, 4.6, 4.6); Calibrated: 2017/12/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (91x141x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 0.194 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dv=4mm. dz=2mm

Reference Value = 0.2010 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.00703 W/kg

Maximum value of SAR (measured) = 0.102 W/kg

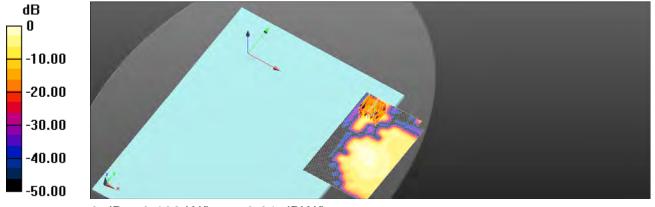

0 dB = 0.102 W/kg = -9.91 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 220 of 328

Date: 2018/1/17

WLAN 802.11n(40M) 5.3G_Body_Bottom side_CH 54_Main_0mm

Communication System: WLAN(5G); Frequency: 5270 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5270 MHz; $\sigma = 5.271 \text{ S/m}$; $\varepsilon_r = 49.46$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 SN7351; ConvF(4.56, 4.56, 4.56); Calibrated: 2017/12/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (91x141x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 0.181 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 0.4810 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.182 W/kg

SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.00645 W/kg

Maximum value of SAR (measured) = 0.0962 W/kg

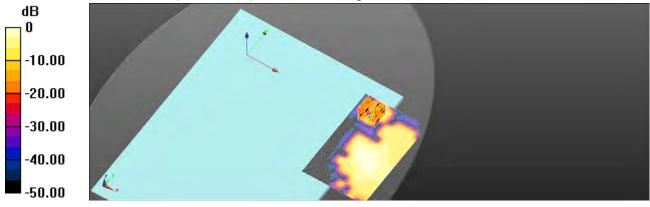

0 dB = 0.0962 W/kg = -10.17 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 221 of 328

Date: 2018/1/18

WLAN 802.11ac(80M) 5.6G_Body_Bottom side_CH 138_Main_0mm

Communication System: WLAN(5G); Frequency: 5690 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5690 MHz; $\sigma = 5.853 \text{ S/m}$; $\epsilon_r = 48.183$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.3°C

DASY5 Configuration:

Probe: EX3DV4 - SN7351; ConvF(3.98, 3.98, 3.98); Calibrated: 2017/12/21;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2017/3/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (91x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.123 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 0.2520 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.431 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.124 W/kg

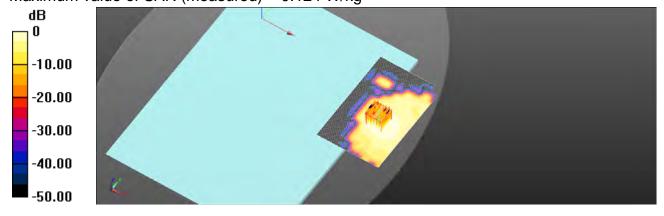

0 dB = 0.124 W/kg = -9.05 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 222 of 328

Date: 2018/1/19

WLAN 802.11ac(80M) 5.8G_Body_Bottom side_CH 155_Main_0mm

Communication System: WLAN(5G); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5775 MHz; $\sigma = 6.024$ S/m; $\varepsilon_r = 48.041$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7351; ConvF(4.21, 4.21, 4.21); Calibrated: 2017/12/21;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2017/3/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (91x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.0766 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 0.6560 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.265 W/kg

SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0825 W/kg

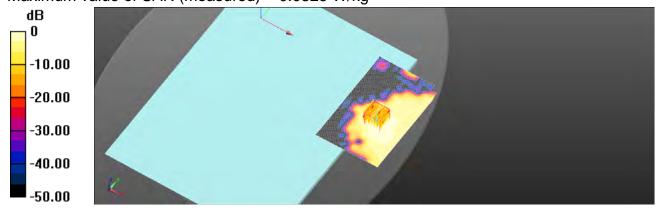

0 dB = 0.0825 W/kg = -10.83 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 223 of 328

Date: 2018/1/12

WLAN 802.11b_Body_Bottom side_CH 6_Aux_0mm

Communication System: WLAN(2.45G); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2437 MHz; $\sigma = 1.915$ S/m; $\epsilon_r = 52.874$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7351; ConvF(7.82, 7.82, 7.82); Calibrated: 2017/12/21;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2017/3/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (81x121x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0193 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 0.3040 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0270 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00796 W/kg

Maximum value of SAR (measured) = 0.0189 W/kg

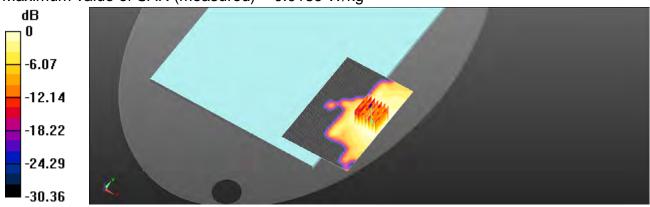

0 dB = 0.0189 W/kg = -17.24 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 224 of 328

Date: 2018/1/12

Bluetooth(GFSK)_Body_Bottom side_CH 0_Aux_0mm

Communication System: WLAN(2.45G); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2412 MHz; $\sigma = 1.906$ S/m; $\epsilon_r = 52.898$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7351; ConvF(7.82, 7.82, 7.82); Calibrated: 2017/12/21;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2017/3/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (81x121x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0014 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 0.0233 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0021 W/kg

SAR(1 g) = 0.00104 W/kg; SAR(10 g) = 0.000781 W/kg

Maximum value of SAR (measured) = 0.0019 W/kg

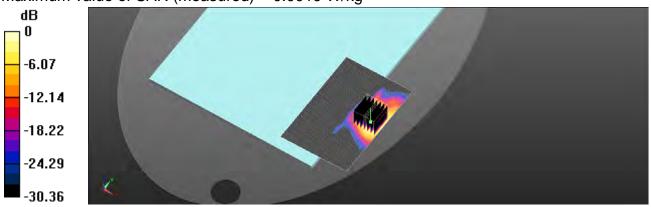

0 dB = 0.0019 W/kg = -26.35 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 225 of 328

Date: 2018/1/16

WLAN 802.11n(40M) 5.2G_Body_Bottom side_CH 46_Aux_0mm

Communication System: WLAN(5G); Frequency: 5230 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5230 MHz; $\sigma = 5.19 \text{ S/m}$; $\varepsilon_r = 49.559$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7351; ConvF(4.6, 4.6, 4.6); Calibrated: 2017/12/21;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2017/3/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (91x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.0388 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 0.3310 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.137 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.00978 W/kg

Maximum value of SAR (measured) = 0.0397 W/kg

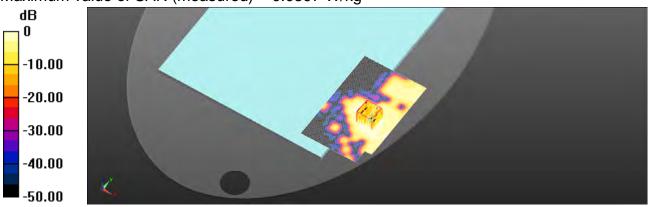

0 dB = 0.0397 W/kg = -14.01 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 226 of 328

Date: 2018/1/17

WLAN 802.11n(40M) 5.3G_Body_Bottom side_CH 54_Aux_0mm

Communication System: WLAN(5G); Frequency: 5270 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5270 MHz; $\sigma = 5.271 \text{ S/m}$; $\varepsilon_r = 49.46$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 21.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7351; ConvF(4.56, 4.56, 4.56); Calibrated: 2017/12/21;

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2017/3/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (91x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.0520 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 0.3080 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.00793 W/kg

Maximum value of SAR (measured) = 0.0493 W/kg

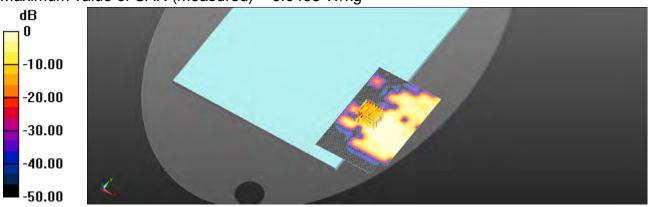

0 dB = 0.0493 W/kg = -13.07 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 227 of 328

Date: 2018/1/18

WLAN 802.11ac(80M) 5.6G_Body_Bottom side_CH 138_Aux_0mm

Communication System: WLAN(5G); Frequency: 5690 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5690 MHz; $\sigma = 5.853 \text{ S/m}$; $\epsilon_r = 48.183$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 SN7351; ConvF(3.98, 3.98, 3.98); Calibrated: 2017/12/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (91x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.0768 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 0.3960 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.208 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0788 W/kg

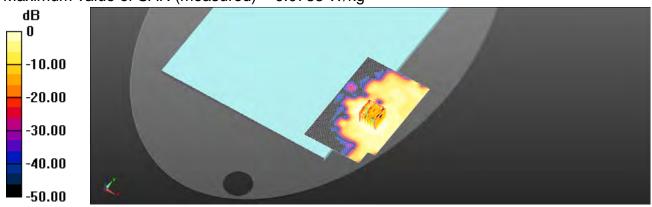

0 dB = 0.0788 W/kg = -11.04 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 228 of 328

Date: 2018/1/19

WLAN 802.11ac(80M) 5.8G Body Bottom side CH 155 Aux 0mm

Communication System: WLAN(5G); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5775 MHz; $\sigma = 6.024$ S/m; $\varepsilon_r = 48.041$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7351; ConvF(4.21, 4.21, 4.21); Calibrated: 2017/12/21;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2017/3/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (91x141x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 0.0449 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 0.5220 V/m: Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0980 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.00872 W/kg

Maximum value of SAR (measured) = 0.0462 W/kg

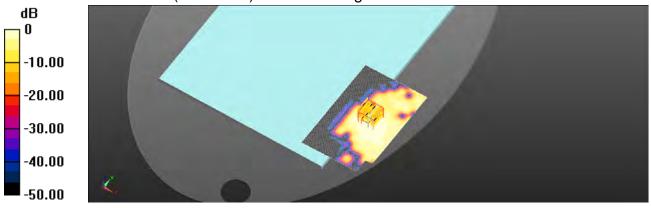

0 dB = 0.0462 W/kg = -13.36 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 229 of 328

6. SAR System Performance Verification

Date: 2018/1/5

Dipole 750 MHz SN:1015

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: f = 750 MHz; $\sigma = 0.961 \text{ S/m}$; $\varepsilon_r = 55.827$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7351; ConvF(10.81, 10.81, 10.81); Calibrated: 2017/12/21;

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2017/3/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (51x141x1): Interpolated grid: dx=15 mm,

dy=15 mm

Maximum value of SAR (interpolated) = 2.78 W/kg

Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.31 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.33 W/kg

SAR(1 g) = 2.19 W/kg; SAR(10 g) = 1.41 W/kg

Maximum value of SAR (measured) = 2.80 W/kg

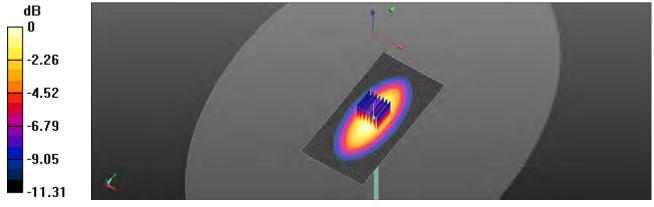

0 dB = 2.80 W/kg = 4.47 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 230 of 328

Date: 2018/1/8

Dipole 835 MHz_SN:4d063

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: f = 835 MHz; $\sigma = 1.01$ S/m; $\varepsilon_r = 55.025$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7351; ConvF(10.39, 10.39, 10.39); Calibrated: 2017/12/21;

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2017/3/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (61x121x1): Interpolated grid: dx=15 mm, dv=15 mm

Maximum value of SAR (interpolated) = 3.12 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.63 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.66 W/kg

SAR(1 g) = 2.46 W/kg; SAR(10 g) = 1.62 W/kg Maximum value of SAR (measured) = 3.11 W/kg

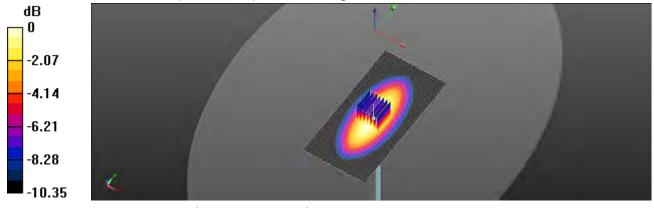

0 dB = 3.11 W/kg = 4.93 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 231 of 328

Date: 2018/1/9

Dipole 1750 MHz SN:1008

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1750 MHz; $\sigma = 1.454 \text{ S/m}$; $\varepsilon_r = 53.551$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN7351; ConvF(8.58, 8.58, 8.58); Calibrated: 2017/12/21;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2017/3/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (41x71x1): Interpolated grid: dx=15 mm,

dv=15 mm

Maximum value of SAR (interpolated) = 14.2 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.40 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.4 W/kg; SAR(10 g) = 5.06 W/kgMaximum value of SAR (measured) = 13.5 W/kg

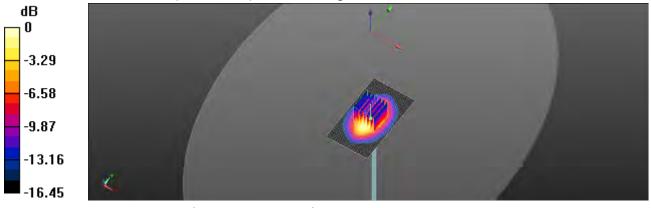

0 dB = 13.5 W/kg = 11.30 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 232 of 328

Date: 2018/1/10

Dipole 1900 MHz SN:5d173

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1900 MHz; $\sigma = 1.516 \text{ S/m}$; $\epsilon_r = 53.022$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.8°C; Liquid temperature: 21.4°C

DASY5 Configuration:

Probe: EX3DV4 - SN7351; ConvF(8.22, 8.22, 8.22); Calibrated: 2017/12/21;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2017/3/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (41x101x1): Interpolated grid: dx=15 mm, dv=15 mm

Maximum value of SAR (interpolated) = 14.8 W/kg

Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.69 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 18.8 W/kg

SAR(1 g) = 10.3 W/kg; SAR(10 g) = 5.39 W/kg

Maximum value of SAR (measured) = 14.7 W/kg

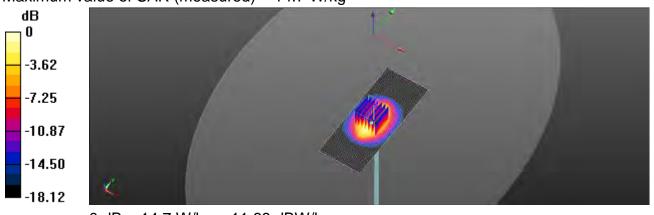

0 dB = 14.7 W/kg = 11.68 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 233 of 328

Date: 2018/1/11

Dipole 2300 MHz_SN:1023

Communication System: CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2300 MHz; $\sigma = 1.747 \text{ S/m}$; $\epsilon_r = 53.461$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7351; ConvF(7.98, 7.98, 7.98); Calibrated: 2017/12/21;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2017/3/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (61x131x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 19.5 W/kg

Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.2 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 25.1 W/kg

SAR(1 g) = 12.2 W/kg; SAR(10 g) = 5.84 W/kg

Maximum value of SAR (measured) = 18.8 W/kg

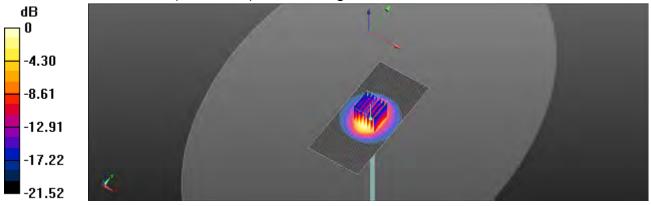

0 dB = 18.8 W/kg = 12.74 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 234 of 328

Date: 2018/1/12

Dipole 2450 MHz_SN:727

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2450 MHz; $\sigma = 1.931 \text{ S/m}$; $\epsilon_r = 52.808$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7351; ConvF(7.82, 7.82, 7.82); Calibrated: 2017/12/21;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2017/3/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (61x91x1): Interpolated grid: dx=12 mm,

dy=12 mm

Maximum value of SAR (interpolated) = 20.7 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.1 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 26.7 W/kg

SAR(1 g) = 12.9 W/kg; SAR(10 g) = 5.93 W/kg Maximum value of SAR (measured) = 19.7 W/kg

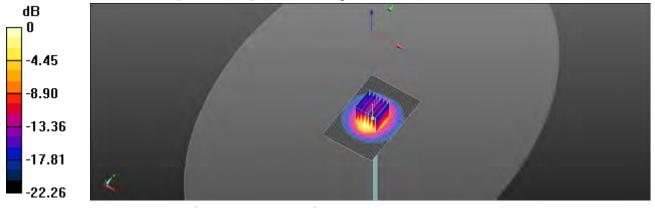

0 dB = 19.7 W/kg = 12.95 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 235 of 328

Date: 2018/1/15

Dipole 2600 MHz_SN:1005

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2600 MHz; $\sigma = 2.124 \text{ S/m}$; $\epsilon_r = 52.227$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN7351; ConvF(7.56, 7.56, 7.56); Calibrated: 2017/12/21;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2017/3/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (71x91x1): Interpolated grid: dx=12 mm,

dy=12 mm

Maximum value of SAR (interpolated) = 23.3 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 100.1 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 31.3 W/kg

SAR(1 g) = 13.9 W/kg; SAR(10 g) = 6.08 W/kg Maximum value of SAR (measured) = 22.3 W/kg

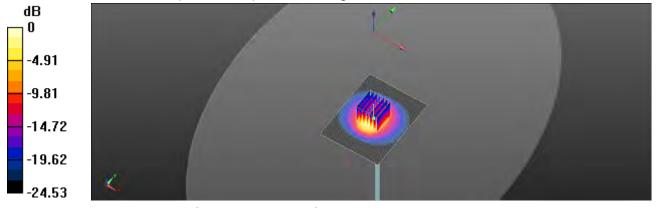

0 dB = 22.3 W/kg = 13.47 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 236 of 328

Date: 2018/1/16

Dipole 5200 MHz_SN:1023

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5200 MHz; $\sigma = 5.121 \text{ S/m}$; $\epsilon_r = 49.587$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7351; ConvF(4.6, 4.6, 4.6); Calibrated: 2017/12/21;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2017/3/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=100mW/Area Scan (61x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 16.0 W/kg

Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 58.01 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 30.2 W/kg

SAR(1 g) = 7.35 W/kg; SAR(10 g) = 2.1 W/kg

Maximum value of SAR (measured) = 15.3 W/kg

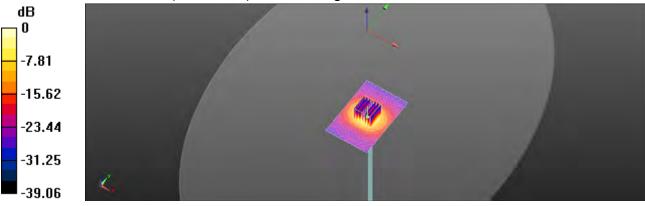

0 dB = 15.3 W/kg = 11.84 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 237 of 328

Date: 2018/1/17

Dipole 5300MHz SN:1023

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5300 MHz; $\sigma = 5.263 \text{ S/m}$; $\epsilon_r = 49.371$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 21.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7351; ConvF(4.56, 4.56, 4.56); Calibrated: 2017/12/21;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2017/3/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (61x81x1): Interpolated grid: dx=10 mm,

Maximum value of SAR (interpolated) = 16.5 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm

Reference Value = 59.25 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 32.6 W/kg

SAR(1 g) = 7.85 W/kg; SAR(10 g) = 2.2 W/kgMaximum value of SAR (measured) = 16.8 W/kg

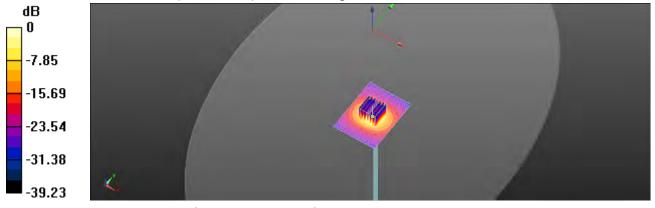

0 dB = 16.8 W/kg = 12.25 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 238 of 328

Date: 2018/1/18

Dipole 5600 MHz SN:1023

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5600 MHz; $\sigma = 5.737 \text{ S/m}$; $\varepsilon_r = 48.52$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.3°C

DASY5 Configuration:

Probe: EX3DV4 - SN7351; ConvF(3.98, 3.98, 3.98); Calibrated: 2017/12/21;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2017/3/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=100mW/Area Scan (61x91x1): Interpolated grid: dx=10 mm,

dv=10 mm

Maximum value of SAR (interpolated) = 17.9 W/kg


Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm

Reference Value = 57.75 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 36.1 W/kg

SAR(1 g) = 8.05 W/kg; SAR(10 g) = 2.27 W/kgMaximum value of SAR (measured) = 17.5 W/kg

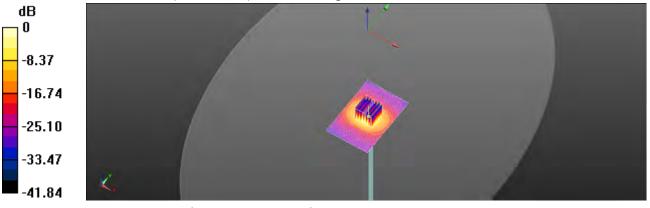

0 dB = 17.5 W/kg = 12.42 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 239 of 328

Date: 2018/1/19

Dipole 5800 MHz_SN:1023

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5800 MHz; $\sigma = 6.004 \text{ S/m}$; $\epsilon_r = 48.006$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7351; ConvF(4.21, 4.21, 4.21); Calibrated: 2017/12/21;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2017/3/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=100mW/Area Scan (61x91x1): Interpolated grid: dx=10 mm,

dy=10 mm

Maximum value of SAR (interpolated) = 15.7 W/kg


Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm

Reference Value = 51.17 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 31.7 W/kg

SAR(1 g) = 7.93 W/kg; SAR(10 g) = 2.19 W/kg Maximum value of SAR (measured) = 14.8 W/kg

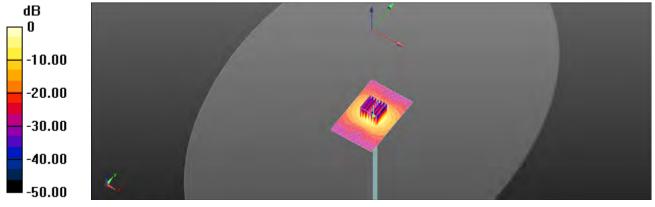

0 dB = 14.8 W/kg = 11.70 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 240 of 328

7. DAE & Probe Calibration Certificate

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst S Service suisse d'étalonnage C Servizio svizzero di taratura S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

SGS - TW (Auden) Certificate No: DAE4-547_Mar17 CALIBRATION CERTIFICATE Object DAE4 - SD 000 D04 BM - SN: 547 QA CAL-06.v29 Calibration procedure(s) Calibration procedure for the data acquisition electronics (DAE) March 22, 2017 Calibration date This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (St). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the contidents. All calibrations have been conducted in the glosed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70% Calibration Equipment used (M&TE critical for calibration) Primary Standards Cal Date (Certificate No.) Scheduled Calibration Keithley Multimeter Type 2001 SN: 0810278 09-Sep-16 (No:19065) Sep-17 Secondary Standards Check Date (in house) Scheduled Check Auto DAE Calibration Unit SE UWS 053 AA 1001 05-Jan-17 (in house check) In house check: Jan-18 Calibrator Box V2.1 SE UMS 005 AA 1002 05-Jan-17 (in house check) In house check: Jan-18 Function Calibrated by Eric Hainfeld Technician Approved by: fin Bomholt Deputy Technical Manager · V.B/Mull Issued March 22, 2017 This calibration cartificate shall not be reproduced except in full without written approval of the faboratory

Certificate No: DAE4-547_Mar17

Page 1 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 241 of 328

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schwidzwiscow Knilbeurdienet
Genico suissa d'étalovnage
Servizio svizzero di tavatura
S Swiss Calibration Service

Accorditation No.: SCS 0108

Accreated by the Swiss Accreatation Service (SAS)
The Swiss Accreditation Service is one of the signaturies to the EA
Munitaries Agreement for the recognition of calibration certificates

Glossary

DAE data ac

data acquisition electronics

Connector angle Information used in DASY system to align probe sensor X to the robot

coordinate system.

Methods Applied and Interpretation of Parameters.

 DC Voltage Measurement: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.

- Connector angle: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - DC Voltage Measurement Linearity: Verification of the Linearity at +10% and -10% of the nominal calibration voltage, Influence of offset voltage is included in this measurement.
 - Common mode sensitivity: Influence of a positive or negative common mode voltage on the differential measurement.
 - Channel separation: Influence of a voltage on the neighbor channels not subject to an input voltage.
 - AD Converter Values with inputs shorted. Values on the internal AD converter corresponding to zero input voltage
 - Input Offset Measurement: Output voltage and statistical results over a large number of zero voltage measurements.
 - Input Offset Current: Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - Input resistance: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - Low Battery Alarm Voltage: Typical value for information, Below this voltage, a battery elarm signal is generated.
 - Power consumption: Typical value for information. Supply currents in various operating modes.

Certilizate No: DAE4-547_Mor17

Page 2 U 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 242 of 328

DC Voltage Measurement

A/D - Converter Resolution nominal High Range: 1LSB = B.fuV. full range = -100...+300 mV Low Range: 1LSB = BINV. full lange = -1, +3mV DASY measurement parameters: Auto Zero Time: 3 sec. Measuring time: 3 sec.

Calibration Factors	X	Y	Z
High Range	403.189 ± 0.02% (k=2)	403.093 ± 0.02% (k=2)	402.739 ± 0.02% (k=2)
Low Range	3.95348 ± 1.50% (k=2)	3.90456 ± 1.50% (k=2)	3.96243 ± 1.50% (k=2)

Connector Angle

Connector Angle to be used in DASY system	91.0 " ± 1 "

Certificate No: DAE4-547_Mar17

Page 3 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 243 of 328

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	200031 23	0,59	0.00
Channel X + Input	20005.44	2.04	0.01
Channel X - Input	-20000.97	4.91	-0.02
Channel Y + Input	200029,80	-1,03	-0.00
Channel Y + Input	20000:30	-3.03	-0.02
Channel Y - Input	-20007.73	-1.72	0.01
Channel Z + Input	200030,21	-0.96	-0.00
Channel Z + Input	20003.13	-0.21	-0,00
Channel Z - Input	-20005.14	0.81	-0.00

Low Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	2000.02	+0.08	-0.00
Channel X + Input	200.18	0.36	0.1B
Channel X - Input	-200.16	0.00	-0.00
Channel Y + Input	2000.10	0.06	0.00
Channel Y + Input	199.43	-0.40	-0.20
Channel Y - Input	-200.77	-0.70	0.35
Channel Z + Input	2000.19	0.28	0.01
Channel Z + Input	198.82	-1.00	-0,50
Channel Z - Input	-201.46	-1.37	0.68

2. Common mode sensitivity

DASY measurement parameters: Auto Zoro Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (µV)
Channel X	200	-2.09	-5.00
	- 200	6.80	4.50
Channel Y	200	+0.67	-1.21
	-200	0.27	-0.41
Channel Z	200	5.07	4.93
	-200	-7.67	-8.12

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (µV)	Channel V (µV)	Channel Z (µV)
Channel X	200	× .	2.65	-2,08
Channel Y	200	10.56		3,60
Channel Z	200	4.55	7.85	-1-

Certificate No: DAE4-547 Mar17

Page 4 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 244 of 328

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16364	15364
Channel Y	16476	16901
Channel Z	16077	16468

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec;

Input 10MO

	Áverage (μV)	min. Offset (μV)	max. Offset (μV)	Std. Deviation (µV)
Channel X	-0.53	-(.14	0.26	0.31
Channel Y	-1.03	-2.43	-0.21	0.32
Channel 2	-1.56	-2,31	-0.62	0.35

6. Input Offset Current

Nominal Input circuitry offset ourrent on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200.	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)	
Supply (+ Vac)	▶7.9	
Supply (- Vcc)	-7,6	

9. Power Consumption (Typical values for Information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)	
Supply (+ Vcc)	+0.01	+6	+14	
Supply (- Vcc)	-0.01	-8	-9	

Certificate No. DAE4-547_Mar17

Page 5 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 245 of 328

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accrecised by the Swiss Accrecitation Service (SAS)

The Swiss Accrecitation Service is one of the signatures to the EA

Multilateral Agreement for the recognition of calibration certificates

Client Auden

Certificme No: EX3-7351_Dec17

CALIBRATION CERTIFICATE

Other

EX3DV4 - SN:7351

Castration propedure(s)

QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6

Calibration procedure for dosimetric E-field probes

Calibration date

December 21, 2017

This calcration certificate documents the tracecounty to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory faculty: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primery Standards	ID.	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-291	SN: 103244	84-Adr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02525)	Apr-18
Reference 20 dB Attenuator	SN: S5277 (20x)	07-Acr-17 (No. 217-02528)	Apr-18
Reference Probe ES3DV2	SN: 3013	31-Dec-16 (No. ES3-3013_Dec16)	Dec-17
DAE4	SN: 654	24-Jul-17 (No. DAE4-654_Jul17)	Jul-18
Secondary Standards	(D	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-18)	In house check Jun-18
Power sensor E4412A.	SN: MY41498087	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: 000110210	06-Apr-15 (in house check Jun-16)	In house check, Jun-18
RF generator HP 86480	SN: US3642U01700	04-Aug-99 (in house check Jun-16)	In house check: Jun-18
Network Analyzes HP 8733E	3N. UB37390588	(B-Citi-D) (it house thetx Ott-17)	in house check: Oct-16

Certificate No. EX3-7351_Dec17

Page 1 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 246 of 328

Calibration Laboratory of Schmid & Partner Engineering AG





Schweizerischer Kallbriernienst. S Service suisse d'étalonnage C Servizio svizzaro di taratum Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swee Appreciation Service (SAS).

The Swiss Accreditation Service is one of the signaturies to the LA Multilateral Agreement for the recognition of calibration certificates

Glossary:

tissue simulating liquid NORMay 2 sensitivity in free space sensitivity in TSL / NORMx,y,z ConvF miod compression point

crest factor (1/duty_cycle) of the RF signal A. B. C. D. modulation dependent linearization parameters

Polarization o p rotation around probe axis

Polarization 9 A rotation around an exist hat is in the plane normal to probe axis (at measurement center)

i.e., 9 = 0 is normal to probe axis information used in DASY system to align probe sensor X to the robot coordinate system. Connector Angle

Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific: Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement

Techniques', June 2013 IEC 62209-1. ". Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016 IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)". March 2010

d) KDB 865664, 'SAR Measurement Requirements for 100 MHz to 6 GHz'

Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization 9 = 0 (f < 900 MHz in TEM-cell; f > 1900 MHz: R22 waveguide). NORMx.y.z are only intermediate values, i.e., the uncertainties of NORMx, y.z does not affect the E2-field uncertainty inside TSL (see below ConvF).
- MOHM(I)x,y,z = MORMx,y,z * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included. in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required), DCP does not depend on frequency nor medial
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- Ax.y.z. Bx.y.z; Cx.y.z; Dx.y.z; VRx.y.z; A. B. C. D are numerical linearization perpineters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.

 ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer
- Standard for f < 900 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMs, y. * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ±.50 MHz to ±.700.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset. The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required,
- Connector Angle: The angle is assessed using the information gained by determining the NORMs (no uncertainty required).

Certificate No. EX3-7351_Dec17

Page 2 of FI

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



Page: 247 of 328

EX3DV4 - SN:7351

December 21, 2017

Probe EX3DV4

SN:7351

Manufactured: Calibrated:

October 13, 2014 December 21, 2017

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

Certificate No: EX3-7351_Dec17

Page 3 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 248 of 328

EX3DV4-SN:7351

December 21, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7351

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)	
Norm $(\mu V/(V/m)^2)^A$	0.47	0.44	0.45	± 10.1 %	
DCP (mV) ⁸	97.9	104.3	97.1		

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB√μV	С	D dB	VR mV	Unc ^b (k=2)
0	CW	X	0.0	0.0	1.0	0.00	136.5	±3.8 %
		Y	0.0	0.0	1.0		136.4	
		Z	0.0	0.0	1.0		147.3	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: EX3-7351_Dec17

Page 4 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

⁶ The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

Numerical linearization parameter: uncertainty not required.

Uncertainty is determined using the max, deviation from linear response applying rectangular distribution and is expressed for the square of the



Page: 249 of 328

EX3DV4-SN:7351

December 21, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7351

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ⁶	Depth ^C (mm)	Unc (k=2)
750	41.9	0.89	10.92	10.92	10.92	0.55	0.80	± 12.0 %
835	41.5	0.90	10.60	10.60	10.60	0.55	0.80	± 12.0 %
900	41.5	0.97	10.31	10.31	10.31	0.40	0.95	± 12.0 %
1750	40.1	1.37	8.78	8.78	8.78	0.28	0.80	± 12.0 %
1900	40.0	1.40	8.50	8.50	8.50	0.29	0.80	± 12.0 %
2000	40.0	1.40	8.41	8.41	8.41	0.30	0.80	± 12.0 %
2300	39.5	1.67	8.03	8.03	8.03	0.31	0.84	± 12.0 %
2450	39.2	1.80	7.74	7.74	7.74	0.34	0.85	± 12.0 %
2600	39.0	1.96	7.51	7.51	7.51	0.36	0.81	± 12.0 %
5200	36.0	4.66	5.49	5.49	5.49	0.35	1.80	± 13.1 %
5300	35.9	4.76	5.15	5.15	5.15	0.40	1.80	± 13.1 %
5500	35.6	4.96	5.04	5.04	5.04	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.81	4.81	4.81	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.90	4.90	4.90	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

*At frequencies below 3 GHz, the validity of tissue parameters (s and e) can be released to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (z and e) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

*AphisiDepth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe typ diameter from the boundary.

Certificate No: EX3-7351 Dec17

Page 5 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 250 of 328

EX3DV4-SN:7351

December 21, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7351

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^c	Relative Permittivity	Conductivity (S/m) F	ConvF X	ConvF Y	ConvF Z	Alpha ⁶	Depth ^G (mm)	Unc (k=2)
750	55.5	0.96	10.81	10.81	10.81	0.40	0.91	± 12.0 %
835	55.2	0.97	10.39	10.39	10.39	0.47	0.87	± 12.0 %
900	55.0	1.05	10.18	10.18	10.18	0.48	0.85	± 12.0 %
1750	53.4	1.49	8.58	8.58	8.58	0.37	0.85	± 12.0 %
1900	53.3	1.52	8.22	8.22	8.22	0.43	0.80	± 12.0 %
2000	53.3	1.52	8.40	8.40	8.40	0.31	0.99	± 12.0 %
2300	52.9	1.81	7.98	7.98	7.98	0.40	0.87	± 12.0 %
2450	52.7	1.95	7.82	7.82	7.82	0.37	0.88	± 12.0 %
2600	52.5	2.16	7.56	7.56	7.56	0.32	0.93	± 12.0 %
5200	49.0	5.30	4.60	4.60	4.60	0.40	1.90	± 13.1 %
5300	48.9	5.42	4.56	4.56	4.56	0.40	1.90	± 13.1 %
5500	48.6	5.65	4.09	4.09	4.09	0.45	1.90	± 13.1 %
5600	48.5	5.77	3.98	3.98	3.98	0.45	1.90	± 13.1 %
5800	48.2	6.00	4.21	4.21	4.21	0.45	1.90	± 13.1 %

⁶ Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ComVF uncertainty at defice on frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ComVF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

*At frequencies below 3 GHz, the validity of tissue parameters (c and c) can be relaxed to ± 10% if flight compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (s and c) is restricted to ± 5%. The uncertainty is the RSS of the ComVF uncertainty for indicated target tissue parameters.

*AphatDepth are determined during ceitbristion. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Certificate No: EX3-7351 Dec17

Page 6 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 251 of 328

EX3DV4- SN 7351

December 21, 2017

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

Certificate No: EX3-7351_Dec17

Page 7 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 252 of 328

EX3DV4-SN:7351

December 21, 2017

Receiving Pattern (6), 9 = 0°

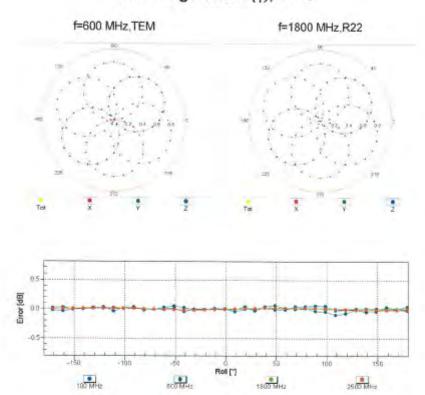

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

Certificate No: EX3-7351_Dec17

Page 8 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.





Page: 253 of 328

EX3074-SN:7351

December 21, 2017

Dynamic Range f(SAR_{head}) (TEM cell , feral= 1900 MHz)





Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Certificate No: EX3-7351_Dec17

Page 9 et 11


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 254 of 328

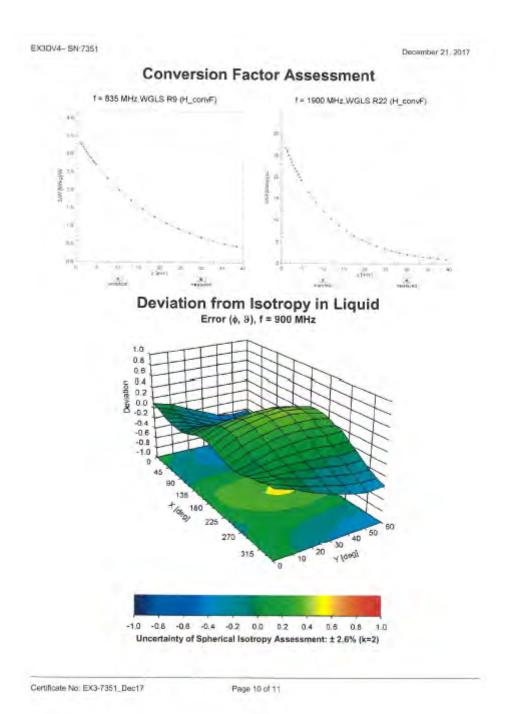

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 255 of 328

EX3DV4-SN:7351

December 21, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7351

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	88.8
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Certificate No: EX3-7351 Dec17

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 256 of 328

8. Uncertainty Budget

Measurement Uncertainty evaluation template for DUT SAR test (3-6G)

А	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probabilit y	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	œ
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	œ
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	œ
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	oc
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	œ
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	œ
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	œ
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	œ
RF ambient condition -	3.00%	R	√3	1.732	1	1	1.73%	1.73%	œ
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	œ
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	œ
Probe Positioning with respect to phantom	2.90%	R	√3	1.732	1	1	1.67%	1.67%	œ
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	œ
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	1.17%	N	1	1	0.64	0.43	0.75%	0.50%	М
Liquid Conductivity (mea.)	3.36%	N	1	1	0.6	0.49	2.02%	1.65%	М
Combined standard uncertainty		RSS					11.91%	11.83%	
Expant uncertainty (95% confidence							23.82%	23.67%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 257 of 328

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

		-		1	,	1.			
A	c Tolerance/	D Probabilit	е		f	g	h=c * f / e Standard	i=c * g / e Standard	k
Source of Uncertainty	Uncertainty	у	Div	Div Value	ci (1g)	ci (10g)	uncertainty	uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.00%	Z	1	1	1	1	6.00%	6.00%	∞
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	∞
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	Z	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	∞
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom	2.90%	R	√3	1.732	1	1	1.67%	1.67%	∞
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	1.06%	N	1	1	0.64	0.43	0.68%	0.46%	М
Liquid Conductivity (mea.)	4.15%	N	1	1	0.6	0.49	2.49%	2.03%	М
Combined standard uncertainty		RSS					11.71%	11.60%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 258 of 328

9. System Validation from Original Equipment Supplier

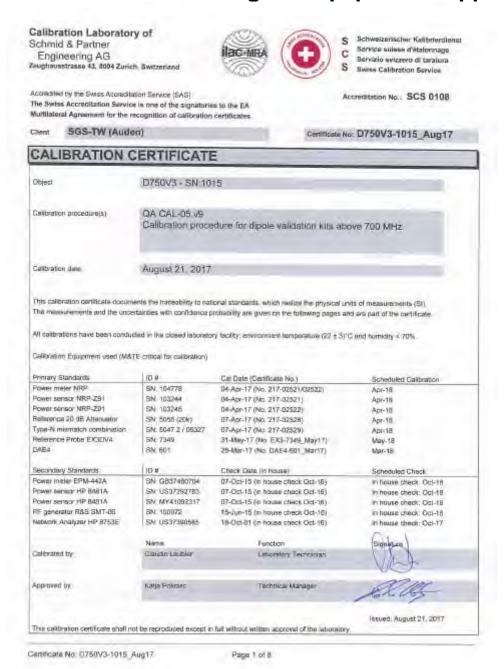

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 259 of 328

Calibration Laboratory of Schmid & Parther Engineering AG Zoughaustrasse 43, 1994 Zurich, Switzerhand





S Softwarzenschar Kalibriardienss
C Service selece S'Atalonninge
Servizio avezzero di tarellura
S Swiss Calibration Service

Accreditation No.: SCS 0108

Accreated by the Swas Accremitation Service (SAS)
The Swas Accreditation Service is one of the signaturing to the EA
Mustilland Agreement for the recognition of calibration certificates

Glossary:

TSL bissue simulating liquid
ConvF sensitivity in TSL / NORM x.y.z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- EC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- EC 82209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)". March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Canditions: Further details are available from the Validation Report at the end
 of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL. The dipole is mounted with the spacer to position its feed
 point exactly below the center marking of the flat phantom section, with the arms oriented
 parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
 positioned under the liquid filled phantom. The Impedance stated is transformed from the
 measurement at the SMA connector to the feed point. The Return Loss ensures low
 reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point.
 No uncertainty required.
- SAR measured; SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificiae No: D750V3-1015_Aug17

Page 2 of B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 260 of 328

Measurement Conditions

DASY system configuration, as far as not given on-

DASY5	V52.10.0
Attyanced Extrapolation	
Modular Flai Pitantom	
15 mm	with Specer
da. dy dz = 5 mm	
750 MHz ± 1 MHz	
	Advanced Extrepolation Modular Fial Phantom 15 mm ds. dy. dz. = 5 mm

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 /nno/m
Measured Head TSL parameters	(22.0±0.2) °C	41.1±6%	0.90 mho/m ± 5 %
Head TSL temperature change during test	< 0.5 °C	_	-

SAR result with Head TSL

SAR averaged over 1 cm² (1 g) of Hoad TSL	Condition	
SAR measured	250 mW input power	2.09 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.25 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.35 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.35 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55,5	0.96 mha/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	55.5 # B %	0.96 mho/m ± 6 %
Body TSL temperature change during test	<0.5 °C		_

SAR result with Body TSL

SAR averaged over 1 cm ² (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.19 W/kg
SAR for nominal Body TSL parameters	namealized to 1W	8.76 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm2 (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.44 W/kg
SAR for nominal Body TSL parameters	romaized to 1W	5.76 W/kg ± 16.5 % (k=2)

Certificate No: D750V3-1015 Aug 17

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 261 of 328

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.9 Ω + 0.3 jΩ
Return Loss	- 28.6 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.6 \O - 3.4 \(\overline{1} \overline{1} \)
Return Loss	-28.4 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.037 ris.
----------------------------------	------------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The clooks is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole aims, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 22, 2010

Certificate No: D760V3-1015_Aug17

Page 4 of R

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 262 of 328

DASY5 Validation Report for Head TSL

Date: 18.08.2017

Test Laboratory; SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1015

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: f = 750 MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 41.1$; p = 1000 kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:


- Probe: EX3DV4 SN7349; ConvF(10.49, 10.49, 10.49); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom; Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid; dx=5mm, dy=5mm, dz=5mm Reference Value = 58,52 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.21 W/kg

SAR(1 g) = 2.09 W/kg; SAR(10 g) = 1.35 W/kgMaximum value of SAR (measured) = 2.82 W/kg



0 dB = 2.82 W/kg = 4.50 dBW/kg

Certificate No: D750V3-1015_Aug17

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holed of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 263 of 328

Impedance Measurement Plot for Head TSL

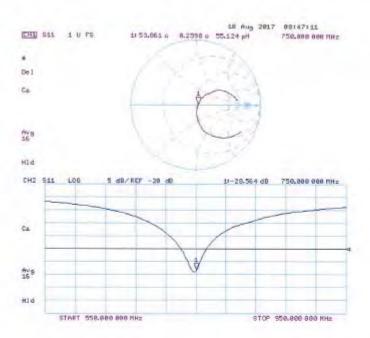

Certificate No: D750V3-1015_Aug17

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 264 of 328

DASY5 Validation Report for Body TSL

Date: 21.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1015

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: f = 750 MHz; $\sigma = 0.96 \text{ S/m}$; $\epsilon_r = 55.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)


DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(10.35, 10.35, 10.35); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 57.77 V/m; Power Drift = -0.00 dB Peak SAR (extrapolated) = 3,27 W/kg

SAR(1 g) = 2.19 W/kg; SAR(10 g) = 1.44 W/kgMaximum value of SAR (measured) = 2.89 W/kg

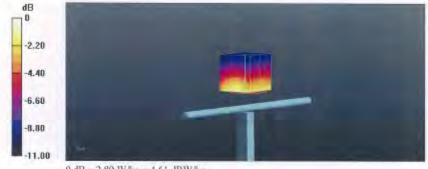

0 dB - 2.89 W/kg - 4.61 dBW/kg

Certificate No: D750V3-1016 Aug 17

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 265 of 328

Impedance Measurement Plot for Body TSL

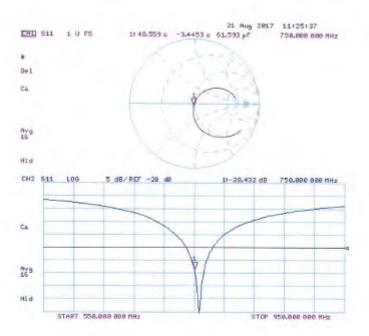

Certificate No: D750V3-1015_Aug17

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 266 of 328



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

www.tw.sas.com



Page: 267 of 328

Calibration Laboratory of

Schmid & Partner Engineering AG Zeughaussbasse 43, 8664 Zurich, Switzerland





S Schweitzerlscher Kalibriemmen C Service suisse d'étalionnage Servizio svizzero di taratura S Swiss Calibration Service

Accreditation No.: SCS 0108

Appreciated by the Swiss Accreditation Service (SAS)

The Swiss Accorditation Service is one of the signatories to the EA Mutitizieral Agramment for the recognition of calibration certificates

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- EC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- iEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end
 of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed
 point exactly below the center marking of the flat phantom section, with the arms oriented
 parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
 positioned under the liquid filled phantom. The impedance stated is transformed from the
 measurement at the SMA connector to the feed point. The Return Loss ensures low
 reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point.
 No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No. D835V2-4d063_Aug17

Page I of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 268 of 328

Measurement Conditions

DASY system configuration, as fat as not given on page 1.

DASY Version	DASYS	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, d2 = 5 mm	
Frequency	835 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mino/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.9±6%	0.93 mho/m ± 8 %
Head TSL temperature change during test	< 0.5 °C	_	

SAR result with Head TSL

SAR averaged over 1 cm3 (1 g) of Head TSL	Condition	
SAR measured	250 mW Input power	2.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9,34 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.55 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6,07 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	56.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	55.3±8%	0.98 mho/m ± 5 %
Body TSL temperature change during test	< 0,5 °C		-

SAR result with Body TSL

SAR averaged over 1 cm ¹ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.41 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.57 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ² (10 g) of Body TSL	condition	
SAR measured	250 mW Input power	1.58 W/kg
SAR for nominal Body TSL parameters	normalizaci to 1W	6.28 W/kg ± 16.5 % (k=2)

Certificate No. DB35V2-4d083_Aug17

Page 3 of 6

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 269 of 328

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point.	51.1 W - 2.7 K2	
Return Loss	- 30.8 dB	

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.2 Ω - 5.2 jΩ	
Return Loss	-24.4 dB	

General Antenna Parameters and Design

The state of the s	77.66
Electrical Delay (one direction)	1.387 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signats. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard,

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 27, 2006

Certificate No. D835V2-4d063_Aug17

Page 4 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 270 of 328

DASY5 Validation Report for Head TSL

Date: 18.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d063

Communication System: UID 0 - CW; Frequency: 835 MHz Medium parameters used: f = 835 MHz; $\sigma = 0.93$ S/m; $\epsilon_c = 40.9$; $\rho = 1000$ kg/m³ Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANS) C63,19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(10.07, 10.07, 10.07); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA: Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cubc 0:

Measurement grid: dx-5mm, dy-5mm, dz-5mm Reference Value = 61.74 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 3.71 W/kg SAR(1 g) = 2.4 W/kg; SAR(10 g) = 1.55 W/kg Maximum value of SAR (measured) = 3.26 W/kg



0 dB = 3.26 W/kg = 5.13 dBW/kg

Certificate No: D835V2-4d063, Aug17

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 271 of 328

Impedance Measurement Plot for Head TSL

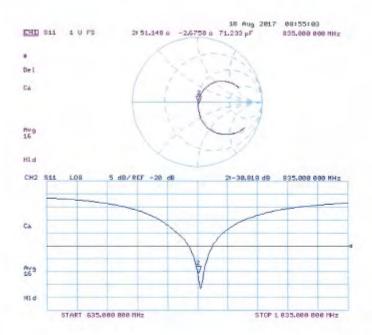

Certificate No: D835V2-4d063_Aug17

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 272 of 328

DASY5 Validation Report for Body TSL

Date: 21.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d063

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: f = 835 MHz; $\sigma = 0.98$ S/m; $\varepsilon_r = 55.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(10.2, 10.2, 10.2); Calibrated: 31.05.2017;
- · Sensor-Surface: 1,4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx-5mm, dy-5mm, dz-5mm Reference Value = 59.86 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 3.64 W/kg SAR(1 g) = 2.41 W/kg; SAR(10 g) = 1.58 W/kg Maximum value of SAR (measured) = 3.20 W/kg

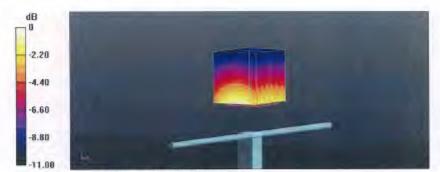

0 dB = 3.20 W/kg = 5.05 dBW/kg

Certificate No: D835V2-4d063_Aug17

Page 7 of B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 273 of 328

Impedance Measurement Plot for Body TSL

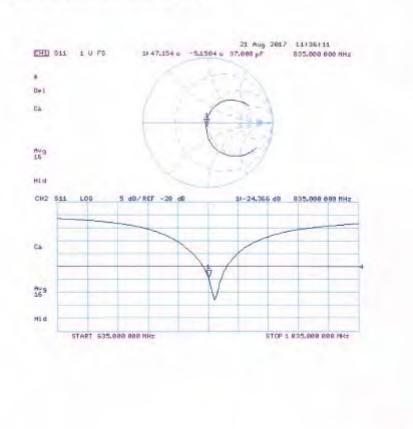

Certificate No: D835V2-4d063_Aug17

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 274 of 328

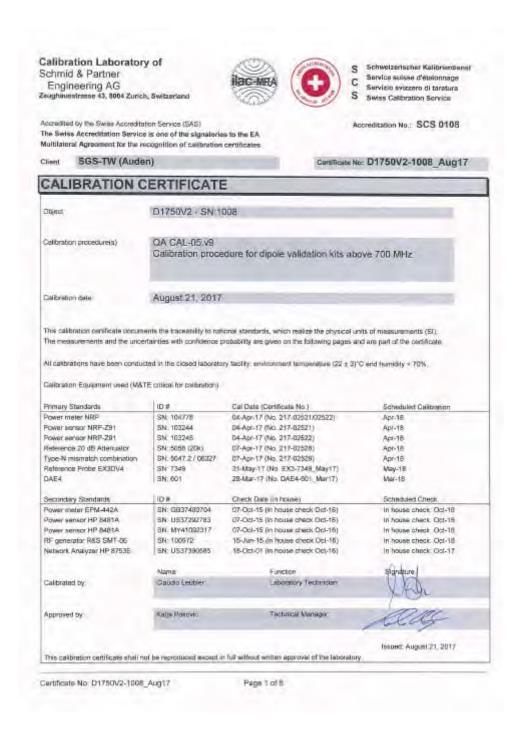

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 275 of 328

Calibration Laboratory of Schmid & Partner Engineering AG





S Schweizerischer Kalibrerde Sérvice suisse d'étalonnage C Servizio svizzero di taralura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

strassa 43, 6504 Zurich, Switzerland

The Swiss Accreditation Service is one of the signatones to the EA Wuitilateral Agreement for the recognition of calibration cortificates

Glossary:

basue simulating liquid TSL ConvF sensitivity in TSL / NORM x,y,z N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, 'Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Anienna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No D1750V2-1008 Aug17

Page 2 n/ B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488

www.tw.sas.com



Page: 276 of 328

Measurement Conditions

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mbolm
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.1 ± 6 %	1,35 mha/m ± 8 %
Head TSL temperature change during test	< 0.5 °C	-	-

SAR result with Head TSL

SAR averaged over 1 cm² (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	8.98 W/kg
SAR for nominal Head TSL parameters	normalized to #W	36.0 Wrkg ± 17.0 % (k=2)

SAR averaged over 10 cm ¹ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.75 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.0 W/kg ± 16.5 % (k=2)

Body TSL parameters

he following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.4	1 49 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.9 ± 8 %	1.47 m/m/m ± 8 %
Body TSL temperature change during test	< 0.5 °C	_	-

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.09 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	36.7 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	4.87 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	19.6 W/kg ± 16.5 % (k=2)

Certificate No. D1750V2-1008_Aug17

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 277 of 328

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point.	49.917 - 0.4 (17
Return Loss	= 48,7 dB

Antenna Parameters with Body TSL

impedance, transformed to feed point	46.3 Ω - 1.4 jΩ	
Return Loss	- 27,6 dB	

General Antenna Parameters and Design

Electrical Delay (one direction)	4 797.6 mg
Liectifical Delay (one direction)	1.221 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semingid coscial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipple arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	February 11, 2009

Certificate No: D1750V2-1008_Aug17

Page 4 of E

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 278 of 328

DASY5 Validation Report for Head TSL

Date: 21.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1008

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: f = 1750 MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(8.73, 8.73, 8.73); Calibrated: 31.05.2017;
- · Sensor-Surface: L4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03,2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001.
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.0 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 8.98 W/kg; SAR(10 g) = 4.75 W/kg

Maximum value of SAR (measured) = 13.7 W/kg

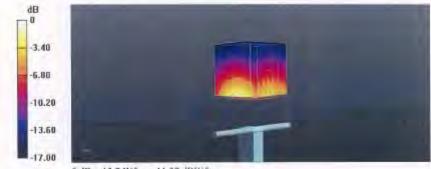

0 dB = 13.7 W/kg = 11.37 dBW/kg

Certificate No: D1750V2-1008_Aug17

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 279 of 328

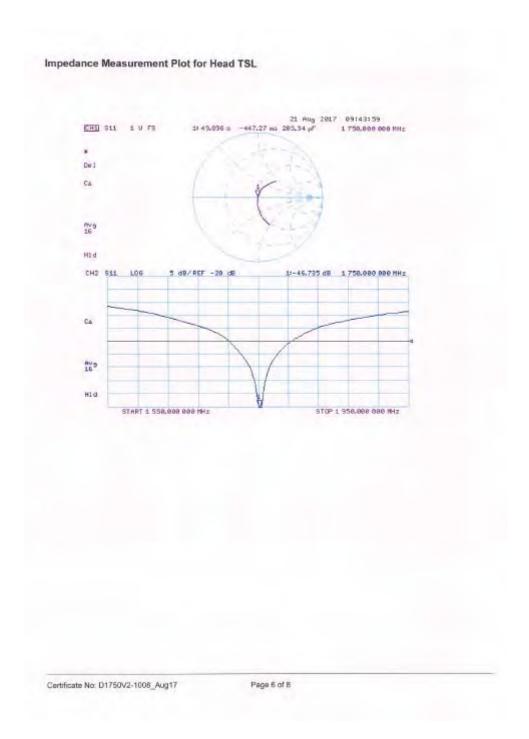

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 280 of 328

DASY5 Validation Report for Body TSL

Date: 18.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1008

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: f = 1750 MHz; $\alpha = 1.47$ S/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(8.46, 8.46, 8.46); Calibrated: 31.05,2017;
- · Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated; 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.85 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 15.8 W/kg

SAR(1 g) = 9.09 W/kg; SAR(10 g) = 4.87 W/kg

Maximum value of SAR (measured) = 13.3 W/kg



0 dB = 13.3 W/kg = 11.24 dBW/kg

Certificata No: D1750V2-1008_Aug17

Page 7 of 6

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined


therein. Any holed of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 281 of 328

Impedance Measurement Plot for Body TSL

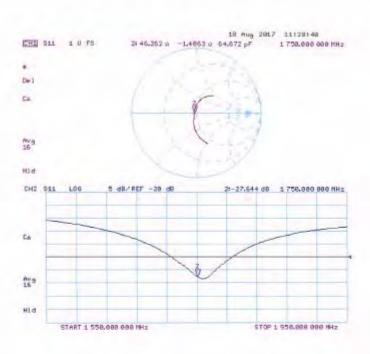

Certificate No: D1750V2-1008_Aug17

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 282 of 328

Calibration Laboratory of Schmid & Partner Engineering AG Zaughausstrase 43, 8004 Zurich, Switzerland





Schwolzerischer Kalibrierdiens Service suitse d'étalonnage Servizio evizzero di toratura Swiss Calibration Service

Accredited by the Swee Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signaturies to the EA

Multiple and Acceptance for the recognition of calification confidences.

Multilateral Agreement for the recognition of calibration certificates

Client SGS-TW (Auden)

Certificate No: D1900V2-5d173_May17

Accreditation No. SCS 0108

CALIBRATION CERTIFICATE

Oblest D1900V2 SN:50173

Calibration procedure(s) QA CAL-05.V9

Calibration procedure for dipole validation kits above 700 MHz

Calibration date: May 31, 2017

This calibration certificate occuments tha traceability to retional standards, which realize the physical units of measurements (SI).
This measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All celibrations have been conducted in the closed laboratory facility: environment temperature (Z2 ± 3)°C and humidity < 70%.

Calibration Equipment used (W&TE critical for calibration)

Primary Standards	(D) #	Cel Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 100244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-291	SN: 103245	(M-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuelör	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047-2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7460	19-May-17 (No. EX3-7460_May17)	May-18
DAE4	SN: 601	28-Main 17 (No. DAE4-901_Mar17)	Man 18
Secondary Standards	liov-	Check Date (in ficuse)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-16
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN. MY41092317	87-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06.	SNI 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 6753E	SN. US37390585	18-Dat-81 (in house check Oct-16)	In house check: Oct-17
	Name	Punction	Signature
Caribiased by:	Jejou Kastrati	Laboratory Technician	7-11
Approved by:	Кађе Рокомо	Technical Manager	AP ST

Certificate No: D1900V2-5d173_May17

Page 1 of E

This calibration certificate shall not be reproduced except in full without within approval of the laboratory

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 283 of 328

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzminnd





Service suisse d'étalonnage C Servizio avizzaro di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Appreditation Service is one of the eigenipries to the EA Multilitieral Agreement for the recognition of calibration certificates

Glossary:

tissue simulating liquid TSL sensitivity in TSL / NORM x,y,z ConvF not applicable or not measured N/A

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)*, February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required,
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized; SAR as measured, normalized to an input power of 1 W at the antenna
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Democate No: D1900V2-5d173_May17

Page 2 al B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488

www.tw.sas.com



Page: 284 of 328

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52,10,0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22,0 °C	40,0	1.40 mila/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	413±6%	1.40 mho/m ± 8 %
Head TSL temperature change during test	< 0.5 °C	land	-

SAR result with Head TSL

SAR averaged over 1 cm ² (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.1 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	40.7 W/kg ± 17.0 % (k=2)

SAR everaged over 10 cm2 (10 g) of Head TSL	condition	
SAR measured	250 mW Input power	5.26 W/kg
SAR for nominal Head TSL parameters	WI of beginnen	21.1 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54,2±6 %	1.51 mha/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	10-01	-

SAR result with Body TSL

SAR averaged over 1 cm ² (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.98 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	40.2 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ² (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5,90 W/kg
SAFI for nominal Body TSL parameters	normalized to 1W	21.3 W/kg ± 16.5 % (k=2)

Certificate No. D1900V2-5d173, May17

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 285 of 328

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to food point	$51.3 \Omega + 4.9 J\Omega$
Return Loss	- 26.1 dB

Antenna Parameters with Body TSL

Impedance, transformed to food point	47.5 Ω + 6,0 jΩ
Return Loss	- 23.5 dB

General Antenna Parameters and Design

#1 to be 1 Bules Association in a	1,199 ns
Electrical Delay (one direction)	1.135 /18

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The entenna is therefore short-circuited for DC-signals. On some of the dipoles, small and caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAFI data are not affected by this change. The overall dipole length is still according to the Standard

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedbold may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	June 06, 2012

Cartricate No: D1980V2-58173_May17

Page 4 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 286 of 328

DASY5 Validation Report for Head TSL

Date: 31.05.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d173

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: f = 1900 MHz; $\sigma = 1.4 \text{ S/m}$; $\epsilon_s = 41.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)


DASY52 Configuration:

- Probe: EX3DV4 SN7460; ConvF(7.98, 7.98, 7.98); Calibrated: 19.05.2017;
- · Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 107.7 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 18.9 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.26 W/kgMaximum value of SAR (measured) = 15.3 W/kg

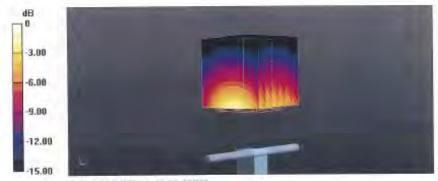

0 dB = 15.3 W/kg = 11.85 dBW/kg

Certificate No. D1900V2-5d173_May17

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 287 of 328

Impedance Measurement Plot for Head TSL

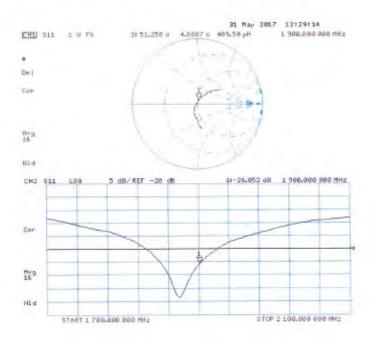

Certificate No: D1900V2-5d173_May17

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 288 of 328

DASY5 Validation Report for Body TSL

Date: 31.05.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d173

Communication System: UID 0 - CW; Frequency: 1900 MHz Medium parameters used: Γ = 1900 MHz; σ = 1.51 S/m; ϵ_r = 54.2; ρ = 1000 kg/m² Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7460; ConvF(7.82, 7.82, 7.82); Calibrated: 19.05.2017;
- · Sensor-Surface; 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28,03,2017
- Phantom: Flat Phantom 5.0 (back); Type; QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 102.9 V/m; Power Drift = -0.08 dB Peak SAR (extrapolated) = 17.5 W/kg SAR(1 g) = 9.98 W/kg; SAR(10 g) = 5.3 W/kg Maximum value of SAR (measured) = 14.3 W/kg



0 dB = 14.3 W/kg = 11.55 dBW/kg

Certificate No: D1900V2-5d173_May17

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 289 of 328

Impedance Measurement Plot for Body TSL

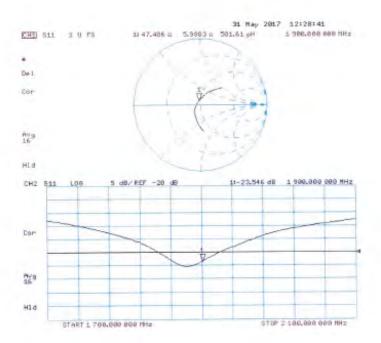

Certificate No: D1900V2-5d173_May17

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 290 of 328



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 291 of 328

Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage C Servizio svizzoro di tareture S Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Appreditation Service is one of the signaturies to the EA Multitateral Agreement for the recognition of calibration certificates

Glossary:

tissue simulating liquid ConvF sensitivity in TSL / NORM x,y,z N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, *IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated,
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- · Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Dertificate No. D2300V2-1023 Aug17

Page 2 of E

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 292 of 328

Measurement Conditions

DASY system configuration, as far as not given on page 1

DASY Varsion	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phentom	Modular Fast Pharsom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	ds. dy. dz = 5 mm	
Frequency	2300 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22,0 °C	39.5	1.67 mno/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	38.3 ± 6 %	1.70 mha/m ± 6 %
Head TSL temporature change during test	< 0.5 °C	_	

SAR result with Head TSL

SAR averaged over 1 cm ² (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	12.0 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	47,2 W/kg ± 17,0 % (k=2)

SAR averaged over 10 cm² (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.74 W/kg
SAR for nominal Head TSL parameters	Why of besilemon	22.7 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.9	1.81 mbolm
Measured Body TSL parameters	(29.0 ± 0.2) °C	52.3 ± 6 %	1.86 mbs/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	_	

SAR result with Body TSL

SAR averaged over 1 cm2 (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	11.8 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	45,4 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm3 (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.68 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22,5 W/kg ± 16.5 % (li=2)

Certificate No. D2306V2-1023_Aug17

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format decuments of the limited to the limited of liability independent of the limited of liability independent of the limited of liability independent of the limited of liability independent of the limited of liability independent of liability ind

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 293 of 328

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	48.4 Ω − 3.1 JΩ	
Return Loss	- 29.0 dB	

Antenna Parameters with Body TSL

Impedance, transformed to feed point	44.9 \Omega - 2.2 \Omega	
Return Loss	- 24.7 dB	

General Antenna Parameters and Design

Electrical Defay (one direction)	1.171 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipote near the feedpoint can be measured.

The dipole is made of standard semingid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the clipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still. according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 30, 2009

Certificate No: D2300V2-1023_Aug17

Page 4 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 294 of 328

DASY5 Validation Report for Head TSL

Date: 17.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2300 MHz; Type: D2300V2; Serial: D2300V2 - SN: 1023

Communication System: UID 0 - CW; Frequency: 2300 MHz

Medium parameters used: f = 2300 MHz; $\sigma = 1.7 \text{ S/m}$; $\epsilon_i = 38.3$; $\rho = 1000 \text{ kg/m}^3$

Phantont section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(8.31, 8.31, 8.31); Calibrated: 31.05,2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6,10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 109.5 V/m; Power Drift = -0.07 dB Peak SAR (extrapolated) = 23.6 W/kg SAR(1 g) = 12 W/kg; SAR(10 g) = 5.74 W/kgMaximum value of SAR (measured) = 18.5 W/kg



0 dB = 18.5 W/kg = 12.67 dBW/kg

Certificate No: D2300V2-1023 Aug 17

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 295 of 328

Impedance Measurement Plot for Head TSL

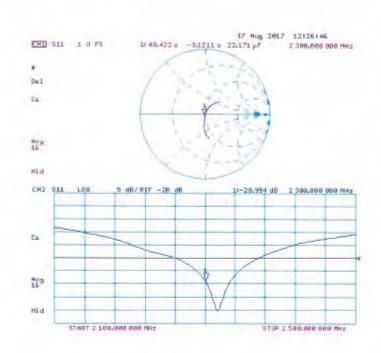

Certificate No: D2300V2-1023_Aug17

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 296 of 328

DASY5 Validation Report for Body TSL

Date: 17.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2300 MHz; Type: D2300V2; Serial: D2300V2 - SN: 1023

Communication System: UID 0 - CW; Frequency: 2300 MHz

Medium parameters used: f = 2300 MHz; $\sigma = 1.86 \text{ S/m}$; $\epsilon_c = 52.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(8.22, 8.22, 8.22); Calibrated; 31.05.2017;
- · Sensor-Surface: J.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002.
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 102.2 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 22.3 W/kg SAR(1 g) = 11.8 W/kg; SAR(10 g) = 5.68 W/kg Maximum value of SAR (measured) = 17.6 W/kg



0 dD = 17.6 W/kg = 12.46 dDW/kg

Certificate No: D2300V2-1023_Aug17

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 297 of 328

Impedance Measurement Plot for Body TSL

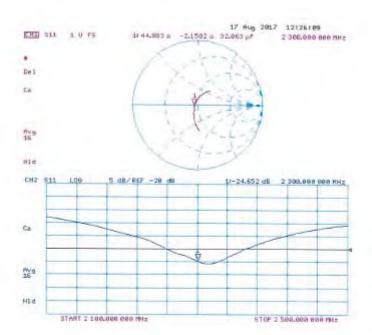

Certificate No: D2300V2-1023_Aug17

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Page 8 of 8

SGS Taiwan Ltd.



Page: 298 of 328

Calibration Laboratory of Schmid & Partner Engineering AG usstrasse 43, 8004 Zurich, Switzerland





Service suisse d'étaionnage Servizio avizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swas Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

	ERTIFICATE		
tipo:	D2450V2 - SN: 7	27	
albration procedure(s)	QA CAL-05.v9 Calibration proce	dure for dipole validation kits abo	we 700 MHz
calibration date.	April 21, 2017		
VI calibrations have been conduc Calibration Equipment used (MST		ry facility: environment temperature (22 ± 3) $^{\circ}$	C and flumicity < 70%.
	Lors at	Cal Date (Certificate No.)	Scheduled Californion
rimary Standards	ID #	Con Dotto Food Income 146.3	- contractor State Contracti
himary Standards Sower meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr/18
ower meter NRP			Talle level of the lateral level of the leve
	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power meter NRP Power sensor NRP-ZB1	SN: 104778 SN: 100244 SN: 100245 SN: 5058 (20k)	04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528)	Apr-18 Apr-18
Power mater NRIP Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Attanuator Type-N mismatch combination	SN: 104778 SN: 103244 SN: 103245 SN: 5058 (20k) SN: 5047.2 / 06327	04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528)	Apr-18 Apr-18 Apr-18 Apr-16 Apr-18
ower meter NEP tower sensor NEP-Z91 tower sensor NEP-Z91 tower sensor NEP-Z91 seference 20 dB Attenuator type-N mismatch combination Reference Probe EXSCM4	SN: 104778 SN: 100244 SN: 103245 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 7346	04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02529) 31-Dec-16 (No. EX3-7349, Dec16)	Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Dec-17
ower meter NEP tower sensor NEP-Z91 tower sensor NEP-Z91 tower sensor NEP-Z91 seference 20 dB Attenuator type-N mismatch combination Reference Probe EXSCM4	SN: 104778 SN: 103244 SN: 103245 SN: 5058 (20k) SN: 5047.2 / 06327	04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528)	Apr-18 Apr-18 Apr-18 Apr-16 Apr-18
Power meter NRP Power sensor NRP-291 Power sensor NRP-291	SN: 104778 SN: 100244 SN: 103245 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 7346	04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02529) 31-Dec-16 (No. EX3-7349, Dec16)	Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Dec-17
Power meter NRP Power sensor NRP-291 Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Albanuado' Type-N mismatch combination Reference Probe EXSOV4 DAE4	SN: 104778 SN: 100244 SN: 100245 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 7348 SN: 601	04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02529) 31-04c-16 (No. EX3-344, Dec16) 25-Mar-17 (No. DAE4-601_Mar17)	Apr-18 Apr-18 Apr-16 Apr-16 Apr-16 Dec-17 Msr-18
Power meter NRP Power sensor NRP-291 Power sensor NRP-291 Power sensor NRP-291 Power sensor NRP-291 Power sensor NRP-291 Power sensor NRP-291 Power sensor NRP-291 Power Sensor S	SN: 104778 SN: 100244 SN: 100245 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 7348 SN: 601	04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02529) 31-Dec-16 (No. EXX-7349, Dec-16) 28-Mar-17 (No. DAE4-601, Mar 17) Check Dato (in Incuse)	Apr-18 Apr-18 Apr-18 Apr-16 Apr-16 Apr-17 Mar-18 Schedulad Check In house check: Oct-18
Power meter NEP Power sensor NEP-291 Power sensor NEP-291 Power sensor NEP-291 Power sensor NEP-291 Power meter Sensor NEP-291 Power meter Sensor NEP-291 Power meter NEP-442A	SN: 104778 SN: 103244 SN: 103245 SN: 5058 (28k) SN: 5058 (28k) SN: 5058 (28k) SN: 7348 SN: 601	04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02529) 31-Dec-16 (No. EX3-7349, Dec16) 28-Mar-17 (No. DAE4-501, Mar17) Check Date (in house)	Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Dec-17 Mar-18 Schedulad Check In house check: Oct-18 In house check: Oct-18
gaer meter NRP-ZBT tower sensor NRP-8481A	SN: 104778 SN: 100244 SN: 100245 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 7348 SN: 601 ID # SN: GB37480704 SN: US37292783 SN: MY41092317 SN: 100972	04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02521) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02529) 31-Dec-16 (No. EXX-7349, Dec-16) 28-Mar-17 (No. DAE4-601, Mar 17) Check Data (in house, dec-2 Oct-16) 07-Oct-16 (in house check Oct-16) 07-Oct-16 (in house check Oct-16) 15-Jun-15 (in house check Oct-16)	Apr-18 Apr-18 Apr-18 Apr-16 Apr-16 Apr-17 Mar-18 Schedulad Check In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18
Power meter NRP Power sensor NRP-291 Power sensor NRP-291 Power sensor NRP-291 Power sensor NRP-291 Power sensor NRP-291 Power meter Sensor NRP-291 Power sensor HP 8481A Power sensor HP 8481A Power sensor HP 8481A	SN: 104778 SN: 100244 SN: 100246 SN: 5058 (20k) SN: 5058 (20k) SN: 5047.2 / 06327 SN: 7348 SN: 601 ID # SN: GB37480704 SN: US37292783 SN: MY41092317	04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02529) 31-Dec-16 (NV) EX3-7349 (Dec16) 28-Mar-17 (No. DAE4-601 (Mar 17) Check Date (in house) 07-Oc-15 (in house check Oct-16) 07-Oc-15 (in house check Oct-16) 07-Oc-15 (in house check Oct-16)	Apr-18 Apr-18 Apr-18 Apr-16 Apr-16 Apr-17 Mar-18 Scheduled Check In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18
Power meter NEIP Power sensor NEIP-Z91 Power sensor NEIP-Z91 Power sensor NEIP-Z91 Power sensor NEIP-Z91 Power meter Q0 de Attenuator Pype-N mismatch combination Picterishop Probe EXSCN4 DAE4 Secondary Standards Power meter EPM-442A Power sensor HP 8481A	SN: 104778 SN: 100244 SN: 100245 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 7348 SN: 601 ID # SN: GB37480704 SN: US37292783 SN: MY41092317 SN: 100972	04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02521) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02529) 31-Dec-16 (No. EXX-7349, Dec-16) 28-Mar-17 (No. DAE4-601, Mar 17) Check Data (in house, dec-2 Oct-16) 07-Oct-16 (in house check Oct-16) 07-Oct-16 (in house check Oct-16) 15-Jun-15 (in house check Oct-16)	Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Dec-17 Msr-18 Schedulart Check In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-17
Power meter NEIP Power sensor NEIP-Z91 Power sensor NEIP-Z91 Power sensor NEIP-Z91 Power sensor NEIP-Z91 Power sensor NEIP-Z91 Power meter Sensor NEIP-Z91 Power meter EPM-442A Power sensor HP 8481A	SN: 104778 SN: 103244 SN: 103245 SN: 5058 (20k) SN: 50547.2/ 06327 SN: 7346 SN: 601 ID # SN: G837480704 SN: US37292783 SN: MY41092317 SN: 100972 SN: US37380585 Name	04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02529) 31-Dec-16 (N	Apr-18 Apr-18 Apr-18 Apr-16 Apr-16 Apr-17 Mar-18 Scheduled Check In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18
Power meter NRP Power sensor NRP-291 Power sensor NRP-291 Power sensor NRP-291 Power sensor NRP-291 Power sensor NRP-291 Power meter Sensor NRP-291 Power sensor HP 8481A Power sensor HP 8481A Power sensor HP 8481A	SN: 104778 SN: 100244 SN: 100245 SN: 5058 (20k) SN: 5058 (20k) SN: 5057.27 06327 SN: 7348 SN: 601 ID # SN: GB37480704 SN: US37292783 SN: MY41092317 SN: 100972 SN: US37290685	04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 01-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02529) 31-Dec-16 (No. EX3-7349, Dec16) 28-Mar-17 (No. DAE-4-501, Mar17) Check-Date (in house) 07-Det-15 (in house check Oct-16) 07-Det-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 18-Oct-01 (in house check Oct-16)	Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Dec-17 Msr-18 Schedulart Check In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-17
Power meter NEIP Power sensor NEIP-Z91 Power sensor NEIP-Z91 Power sensor NEIP-Z91 Power sensor NEIP-Z91 Power sensor NEIP-Z91 Power meter Sensor NEIP-Z91 Power meter EPM-442A Power sensor HP 8481A	SN: 104778 SN: 103244 SN: 103245 SN: 5058 (20k) SN: 50547.2/ 06327 SN: 7346 SN: 601 ID # SN: G837480704 SN: US37292783 SN: MY41092317 SN: 100972 SN: US37380585 Name	04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02529) 31-Dec-16 (N	Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Dec-17 Msr-18 Schedulari Check In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-17

Certificate No: D2450V2-727_Apr17

Page 1 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 299 of 328

Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Service suisse d'étalonnage C Servizio svizzero di taratura Swinn Calibration Serves

Accreditation No.: SCS 0108

Accredited by the Selec Accreditation Service (SAS)

The Swize Accreditation Service is one of the eigentories to the EA Multilateral Agreement for the recognition of calibration pertifica

Glossary:

TSL tissue simulating liquid sensitivity in TSL / NORM x,y,z ConvF NVA not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques*, June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held b) devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)*, February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)*, March 2010 d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Réturn Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required,
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D2450V2-T27 April 7

Page 2 of E

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 300 of 328

Measurement Conditions

as far as not given on page 1 DASY 6

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

Head TSL parameters

rs and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	37.7 ± 6 %	1.87 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.4 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.2 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.18 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.3 W/kg ± 16.5 % (k=2)

Body TSL parameters
The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.5 ± 6 %	2.03 mha/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

SAR result with Body TSL

SAR averaged over 1 cm3 (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.9 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	50.6 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.01 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.8 W/kg ± 16.5 % (k=2)

Certificate No: D2450V2-727_Apr17

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 301 of 328

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	56.3 Ω + 2.1 jΩ
Return Loss	- 24.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	51.1 Ω + 4.1 jΩ
Return Loss	- 27.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.148 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the cipole. The antenna is therefore short-circuited for DC-signals. On some of the cipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 09, 2003

Certificate No: D2450V2-727 Apr17 Page 4 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 302 of 328

DASY5 Validation Report for Head TSL

Date: 21.04.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 727

Communication System: UID 0 - CW; Frequency: 2450 MHz Medium parameters used: f = 2450 MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³ Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(7.72, 7.72, 7.72); Calibrated: 31.12.2016;
- · Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52,10.0(1442); SEMCAD X 14.6.10(7413)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 109.8 V/m; Power Drift = -0.06 dB-Peak SAR (extrapolated) = 27.3 W/kg SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.18 W/kg Maximum value of SAR (measured) = 21.1 W/kg



0 dB = 21.1 W/kg = 13.24 dBW/kg

Certificate No: D2450V2-727_Apr17

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 303 of 328

Impedance Measurement Plot for Head TSL

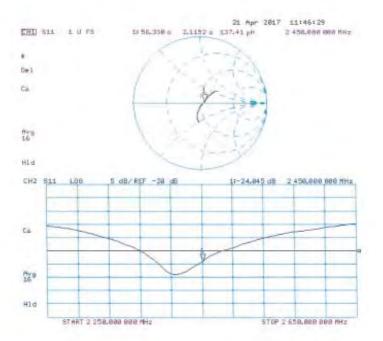

Certificate No: D2450V2-727_Apr17

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 304 of 328

DASY5 Validation Report for Body TSL

Date: 21.04.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 727

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz; $\sigma = 2.03 \text{ S/m}$; $\epsilon_i = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63,19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(7.79, 7.79, 7.79); Calibrated: 31.12,2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection).
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1442); SEMCAD X 14.6.10(7413)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 105.0 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 25.4 W/kg

dB

SAR(1 g) = 12.9 W/kg; SAR(10 g) = 6.01 W/kg

Maximum value of SAR (measured) = 20.0 W/kg



0 dB = 20.0 W/kg = 13.01 dBW/kg

Certificate No: D2450V2-727_April7

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 305 of 328

Impedance Measurement Plot for Body TSL

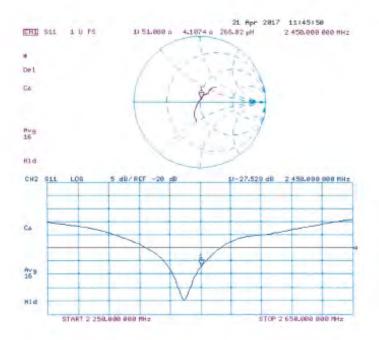

Certificate No: D2450V2-727 Apr17

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 306 of 328

Calibration Laboratory of Schmid & Partner Engineering AG aughausstrasse 43, 8004 Zurion, Switzerland





S Service suisse d'étalonnage C Servizio svizzero di taratura S Swiss Calibration Service

Accreditation No. SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

SDS-TW (Auden)

Cartificate No. D2600V2-1005 Jan 17

	ERTIFICATE		
Deject	D2600V2 - SN:10	005	
Calibration protecture(s)	QA CAL-05.v9 Calibration procedure for clipole validation kits above 700 MHz		we 700 MHz
Calibration date:	January 25, 2017		
		onel standards, which realize the physical un robability are given on the following pages an	
All calibrations have been conduc Calibration Equipment used (MS)		ry facility: anvironment temperature (22 ± 3)°1	C and humidity < 78%.
Primary Standards	ID #	Cal Cale (Certificate No.)	Schedged Casuraron
Power meler NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
ower sensor NRP-Z91	SN: 103244	06-Apr 16 (No. 217-02288)	Apr-17
lower sensor NRP-ZB1	SN: 103245	06-Apt-16 (No. 217-02289)	Apr-17
Alemance 20 dB Attenuator	SN: 5068 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
SHOURINGS AND ARRANGEMENTS.	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02296)	Apr-17
une.N mismatch combination	and the same of th	31-Dec-16 (No. EX3-7349_Dec16)	Dec-17
Reference Proce EX3DV4	SN: 7348 SN: 601	04-Jun-17 (No. DAE4-601_Jan17)	Jan-18
Type-N mismatch combination Reference Probe EX3DV4 DAE4 Secondary Standards	100.00		Jan-18 Scheduled Check
Reference Proce EX30V4 DAE4 Secondary Stendards	SN: 601	04-Jan-17 (No. DAE4-601_Jan17) Check Date (in house) 07-Oct-15 (in house check Dict-16)	Scheduled Check In house check: Oct-18
Reference Probe EX3DV4 DAE4 Secondary Standards Power mater EPM-442A	SN: 801 D 4 SN: GB37480704 SN: UB37292783	04-Jian-17 (No. DAE-4-601_Jan17) Check Date (in house) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16)	Scheduled Check In nouse check: Oct-18 In house check: Oct-18
Reference Proce EX3DV4 DAE4 Secondary Standards Power motor EPM-442A Power sensor HP 8481A Power sensor HP 8481A	SN: 601 E) 4 SN: GB37480/04 SN: US37292783 SN: MY41032317	04-Jun-17 (No. DAE-4-601_Jan17) Check Date (in house) 07-0ct-15 (in house check Dct-16) 07-0ct-15 (in house check Oct-16) 07-0ct-15 (in house check Oct-16)	Scheduled Check In house check: Oct-18 In house check: Oct-18 In house check: Oct-18
Secondary Standards Power sensor HP 8481A Power sensor HP 8481A	SN: 601 E) 4 SN: GB37480704 SN: US37292783 SN: MY41082317 SN: 100972	04-Jian-17 (No. DAE-4-601_Jan17) Check Date (in house) 07-0ct-15 (in house check Oct-16) 07-0ct-15 (in house check Oct-16) 07-0ct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-18)	Scheduled Check In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18
Secondary Standards Power motor EPM-142A Power motor EPM-142A Power sensor HP 8481A Power sensor HP 8481A Pr generator R&S SMT-06	SN: 601 E) 4 SN: GB37480/04 SN: US37292783 SN: MY41032317	04-Jun-17 (No. DAE-4-601_Jan17) Check Date (in house) 07-0ct-15 (in house check Dct-16) 07-0ct-15 (in house check Oct-16) 07-0ct-15 (in house check Oct-16)	Scheduled Check In house check: Oct-18 In house check: Oct-18 In house check: Oct-18
Reference Proce EX3DV4 DAE4 Secondary Stendards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A PF generator R&S SMT-06 Network Analyzer HP 8753E	SN: 801 SN: GB37480704 SN: US37292783 SN: MY41092317 SN: 100972 SN: US37380585 Name	O4-Jian-17 (No. DAE-4601_Jan17) Check Date (in house) O7-Oct-15 (in house check Oct-16) O7-Oct-15 (in house check Oct-16) O7-Oct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 18-Oct-01 (in house check Oct-16) Function	Scheduled Check In nouse check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18
Reference Proce EX3DV4 DAE4 Secondary Stendards Power motor EPM-442A Power sensor HP 8481A Prover sensor HP 9481A RF generator R&S SMT-06 Network Analyzer HP 8753E	SN: 801 D 4 SN: GB37480704 SN: US37292783 SN: MY41082317 SN: 100072 SN: US37380585	O4-Jian-17 (No. DAE-4-601_Jan17) Check Date (in house) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-18) 16-Oct-07 (in house check Oct-16)	Scheduled Check In nouse check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-17
Reference Probe EX3DV4 DAE4	SN: 801 SN: GB37480704 SN: US37292783 SN: MY41092317 SN: 100972 SN: US37380585 Name	O4-Jian-17 (No. DAE-4601_Jan17) Check Date (in house) O7-Oct-15 (in house check Oct-16) O7-Oct-15 (in house check Oct-16) O7-Oct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 18-Oct-01 (in house check Oct-16) Function	Scheduled Check In nouse check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-17

Certificate No: D2600V2-1005_Jan17

Page to it

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 307 of 328

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizenscher Kallbrierdiens Service suisse d'étalonnage C Servizio avizzero di Gunt Swies Calibration Service

Acopsellution No.: SCS 0108

Accredit by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

tissue simulating liquid TSL sensitivity in TSL / NORM x,y,z ConvE N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30) MHz to 6 GHz)". March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%

Cermicate No: D9600VS-1006 Jan 17

Page 2 nl B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488

www.tw.sas.com



Page: 308 of 328

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phentom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2600 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.0	1.95 mho/m
Measured Head TSL parameters	(22,0 ± 0.2) °C	37.4 ± 6 %	2.05 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		_

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW Input power	14.3 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	55.5 W/kg = 17.0 % (k=2)

SAR averaged over 10 cm [§] (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.32 W/kg
SAR for nominal Head TSL parameters	normalized to TW	24.8 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.8 °C	52.5	2.16 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	523±6%	2.20 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	1000	

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.9 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	55.1 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ^S (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6:20 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.7 W/kg ± 16.5 % (k=2)

Certificate No: D2600V2-1005_Jan17

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 309 of 328

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.3 Ω - 4.7 JΩ	
Return Loss	- 26.5 dB	

Antenna Parameters with Body TSL

Impedance, transformed to feed point	44.7 0 - 3.2 0
Fleturn Loss	-23,7 dB

General Antenna Parameters and Design

1.154 ns	
	1.154 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semitigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The entenne is therefore short-circuited for DC-signals. On some of the dipoles, small and cape are added to the dipole zures in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	December 23, 2006

Cemficate No: D2600V2-1005_Jan17

Page 4 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 310 of 328

DASY5 Validation Report for Head TSL

Date: 25.01.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN:1005

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used: f = 2600 MHz; $\sigma = 2.05 \text{ S/m}$; $\varepsilon_k = 37.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(7.56, 7.56, 7.56); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.01.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 116.2 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 30.5 W/kg

SAR(1 g) = 14.3 W/kg; SAR(10 g) = 6.32 W/kgMaximum value of SAR (measured) = 24.2 W/kg



0 dB = 25.2 W/kg = 13.84 dBW/kg

Certificate No: D2600V2-1005_Jan17

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 311 of 328

Impedance Measurement Plot for Head TSL

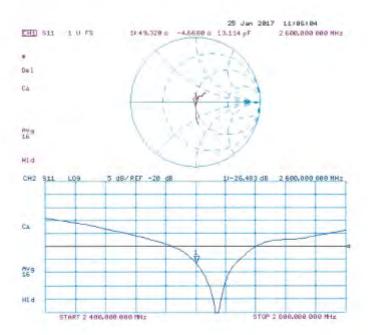

Certificate No: D2600V2-1005 Jan17

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 312 of 328

DASY5 Validation Report for Body TSL

Date: 18.01.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN:1005

Communication System: UID 0 - CW; Frequency: 2600 MHz Medium parameters used: f = 2600 MHz; $\sigma = 2.2$ S/m; $\epsilon_c = 52.3$; $\rho = 1000$ kg/m³ Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(7.48, 7.48, 7.48); Calibrated: 31.12.2016;
- · Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.01.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 108.8 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 28.8 W/kg SAR(1 g) = 13.9 W/kg; SAR(10 g) = 6.2 W/kg

SAR(1 g) = 13.9 W/kg; SAR(10 g) = 6.2 W/kg Maximum value of SAR (measured) = 23.3 W/kg



0 dB = 23.3 W/kg = 13.67 dBW/kg

Certificate No: D2600V2-1005_Jan17

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 313 of 328

Impedance Measurement Plot for Body TSL

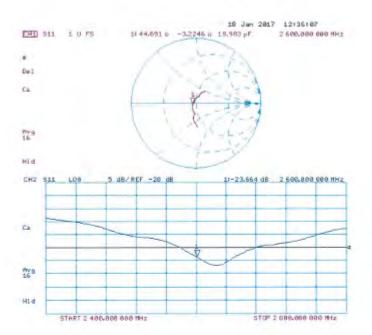

Certificate No: D2600V2-1005_Jan17

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 314 of 328

Calibration Laboratory of Schmid & Partner

Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst S Service suisse d'étalonnage C Servizio avizzero di taratura S Swiss Calibration Service

Appreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

DECH-V2-1022 Jon17

ALIBRATION	ERTIFICATE		
(bjec)	D5GHzV2 - SN:1	023	
Carbraton proedurato)	QA CAL-22.v2 Calibration proce	dure for dipole validation kits bet	ween 3-6 GHz
Calibration date:	January 20, 2017	,	
The measurements and the unce	rtainties with confidence p	ional standards, which realize the physical un rebability are given on the hillowing pages an	id are part of the certificate
Ni calibrations have been conduc Calibration Equipment used (MS)		ry łaciżny, arwironmant temperature (22 \pm 3) $^{\circ}$	Cand humidity < 70%.
Primary Standards	ID#	Cal Date [Certificate No.]	Scheduled Calibration
	SN: 104778	06-Apr-16 (No. 217-02289/02289)	Apr-17
COMMENT TEMPORAL PUBLISH			
A-TEL HIGHER LINE	SNL 103244	96-Apr-16 (No. 217-02288)	Apr-17
ower sensor NRP-Z91	SNL 103244 SNL 103245	06-Apr-16 (No. 217-02288) 06-Apr-16 (No. 217-02280)	Apr-17 Apr-17
ower sensor NRP-Z91 ower sensor NRP-Z91	Seek Village C		
ower sensor NEP-Z91 ower sensor NEP-Z91 belerence 20 dB Attenuator	SN 103245	06-Apr-16 (No. 217-02280) 05-Apr-16 (No. 217-02202) 05-Apr-16 (No. 217-02295)	Apr-17 Apr-17 Apr-17
ower sensor NRP-Z31 ower sensor NRP-Z31 laterance 20 dB Attenuator ype-N internation combination	SN 103245 SN 5058 (20k)	05-Apr-16 (No. 217-02289) 05-Apr-16 (No. 217-02292) 05-Apr-16 (No. 217-02295) 31-Dec-16 (No. EXS-8503_Dec16)	A01-17 A01-17 A01-17 Dec-17
ower sensor NEP-291 fower sensor NEP-291 telerence 20 dB Attanuator ype-N internatch combination telerence Probe EX30V4	SN: 103245 SN: 5058 (20k) SN: 5047.2 / 06327	06-Apr-16 (No. 217-02280) 05-Apr-16 (No. 217-02202) 05-Apr-16 (No. 217-02295)	Apr-17 Apr-17 Apr-17
ower sensor NEP-291 ower sensor NEP-291 telerence 20 dB Attenuator yea-N mismatch combination leterance Probe EX3DV4 AAE4	SN: 103245 SN: 5086 (20k) SN: 5047.2 / 06327 SN: 3603	05-Apr-16 (No. 217-02289) 05-Apr-16 (No. 217-02292) 05-Apr-16 (No. 217-02295) 31-Dec-16 (No. EXS-8503_Dec16)	A01-17 A01-17 A01-17 Dec-17
ower sensor NEP-291 ower sensor NEP-291 telerence 20 dB Attanuator ype-N mismatch combinetion telerence Probe EX3DV4 AE4 secondary Standards	SN 103245 SN 5058 (20k) SN 5047.2 / 06327 SN 3603 SN 601	05-Apr-16 (No. 217-02280) 05-Apr-16 (No. 217-02202) 05-Apr-16 (No. 217-02295) 31-Dec-16 (No. EXS-8503, Dec-16) 04-Jen-17 (No. DAE4-601, Jan17)	Acr-17 Acr-17 Acr-17 Dec-17 Jan-18
ower sensor NEP-291 ower sensor NEP-291 determine 20 dis Altrialio yopeN mismatch combination (alternine Probe EX3DV4 AAE4 secondary Stanzants traser maser EPM-442A	SN 103245 SN 5058 (20k) SN 5057 2 / 06327 SN 503 SN 501	05-Apr-16 (No. 217-02280) 05-Apr-16 (No. 217-02282) 05-Apr-16 (No. 217-02283) 31-Dec-16 (No. EXS-8503_Dec-15) 04-Jen-17 (No. DAE4-GO1_Jan17) Check Date (in house)	A(r-17 Acr-17 Acr-17 Dec-17 Jan-18 Scheduled Check
rower sensor NPP-Z91 fover sensor NPP-Z91 fover sensor NPP-Z91 follower S0 dB Attenutor type-N internation combination talerance Probe EX30V4 AAE4 Secondary Standards fower sensor IPP 8481A	SN: 103245 SN: 5056 (20k) SN: 5047 2 / 06327 SN: 3609 SN: 601	05-Apr-16 (No. 217-02280) 05-Apr-16 (No. 217-02302) 05-Apr-16 (No. 217-02302) 01-Dec-16 (No. 217-02303) Dec-15) 04-Jen-17 (No. DAE4-601_Jen17) Check Date (In house) 07-Oct-16 (in house)	Apr-17 Apr-17 Apr-17 Dec-17 Jan-18 Scheduled Check In house check Dot-18
ower sensor NEP-291 ower sensor NEP-291 ower sensor NEP-291 oberence 20 dB Attenuator yee-N mismatch combination istemance Probe EX3DV4 ME4 isocondary Standards hower more EPM-442A hower sensor IPP 8481A	SN 103245 SN 1038 (204) SN 1058 (204) SN 5047 2 106327 SN 501 SN 501 SN 601 SN 601 SN 6037480704 SN US37282780	05-Apr-16 (No. 217-02280) 05-Apr-16 (No. 217-02202) 05-Apr-16 (No. 217-02295) 31-Duc-16 (No. 207-62295) 04-Jen-17 (No. DAE4-691_Jen17) Check Date (in house) 07-Oct-16 (in house check Oct-16) 07-Oct-16 (in house check Oct-16)	Apr-17 Apr-17 Apr-17 Dec-17 Jan-18 Schedulet Check In house check Oct-18 In house check Oct-18 In house check Oct-18 In house check Oct-18
rower sensor NEP-291 rower sensor NEP-291 telerence 20 dis Attienutor ype-N mismatch combination felerance Probe EX3DV4 SAE4 Secondary Stanzards Power sensor IP-8481A Anwar sensor IP-8481A Typenerator R&S SMT-00	SN 103245 SN 10386 (20k) SN 10386 (20k) SN 503 SN 501 ID 8 SN 6837480704 SN US37292789 SN MY41082317	05-Apr-16 (No. 217-02280) 05-Apr-16 (No. 217-02202) 05-Apr-16 (No. 217-02202) 01-Disc-16 (No. EXS-6803, Dec 16) 04-Jen-17 (No. DAE4-G01_Jan17) Check Date (in house) 07-Oct-16 (in house check Oct-16) 07-Oct-15 (in house check Oct-16)	Apr-17 Apr-17 Apr-17 Dec-17 Jan-18 Scheduled Check In house check Onl-18 In house check Onl-18 In house check Oct-19
ower sensor NEP-291 ower sensor NEP-291 telerence 20 dis Attenuator ype-N mismatch combination telerence Probe EX3DV4 sAE4 secondary Stanzants roser EPM-442A rower sensor HP 8481A rower sensor HP 8481A	SN 103245 SN 1058 (20k) SN 5047 2 / 06327 SN 501 SN 601 SN 601 SN 6857480704 SN US37282789 SM MY41082317 SN 100972 SN US37390585	05-Apr-16 (No. 217-02280) 05-Apr-16 (No. 217-02202) 05-Apr-16 (No. 217-02202) 31-Disc-16 (No. 203-8003, Dec16) 04-Jen-17 (No. DAE4-GOL, Jan17) Check Date (in house) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 17-Oct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16)	Apr-17 Apr-17 Apr-17 Dec-17 Jan-18 Schedulet Check In house check Oct-18 In house check Oct-18 In house check Oct-18 In house check Oct-18
Power sensor NEP-291 Power sensor NEP-291 Power sensor NEP-291 Power sensor NEP-291 Power sensor NEP-291 Power sensor Pobe EX3DV4 DAE4 Secondary Stancards Power sensor PEP 8481A Power sensor PEP 8481A RE generator R&S SMT-08 Network Analyzer PEP 8753E	SN 103245 SN: 5086 (20k) SN: 5047.2 / 06327 SN: 3603 SN: 861 SN: 0637480704 SN: US37292783 SN: 100972	05-Apr-16 (No. 217-02280) 05-Apr-16 (No. 217-02202) 05-Apr-16 (No. 217-02202) 01-Discrite (No. 207-62905) 01-Discrite (No. 205-6303, Dec15) 04-Jen-17 (No. DAE4-601_Jen17) Check Date (in house) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16)	Apr-17 Apr-17 Apr-17 Dec-17 Jan-18 Scheduled Check In house check: Det-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-17
Power meter NPP Power sensor NPP-291 Power sensor NPP-291 Power sensor NPP-291 Reference 20 dB Attenuator Type-N mismatch combination Reference Probe EX30V4 DAE4 Secondary Stanzards Power meter EPM-442A Power sensor I-P 9481A Power sensor I-P 9481A RF generator R&S SMT-08 Network Analyzer I-P 8753E Celibrated by:	SN 103245 SN 1058 (20k) SN 1058 (20k) SN 1050 SN 801 SN 6837480704 SN US37292789 SN MY41082317 SN US37390585 Name	05-Apr-16 (No. 217-02280) 05-Apr-16 (No. 217-02202) 05-Apr-16 (No. 217-02202) 05-Apr-16 (No. 217-02295) 31-Disc-16 (No. 205-3803, Dec16) 04-Jen-17 (No. DAE4-601_Jen17) Check Date (in house) 07-Oct-16 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 17-Oct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 18-Oct-01 (in house check Oct-16)	Apr-17 Apr-17 Apr-17 Dec-17 Jan-18 Scheduled Check In house check: Dct-18 In house check: Dct-10 In house check: Oct-10 In house check: Oct-17

Certificate No: D5GHzV2-1023_Jan17

Page 1 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 315 of 328

Calibration Laboratory of Schmid & Panner Engineering AG Zeugraphstanes Et 1994 Zurich, Switzerland





S Schweizerischer Kalibrierdiens Service suites critatorinage C Service suites critatorinage S Swiss Calibration Service

Accreditation No.: SCS 0108

Accretion by the Some Amendiation Service (SAS)
The Serias Accreditation Service is one of the signatorios to the SA
Multipress Agreement for the recognition of calibration cardificates

Glossary:

ConvF N/A tissue simulating liquid sensitivity in TSL / NORM x.y.z. not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Avaraged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices. Measurement Techniques", June 2013
- EC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- b) KDB 865664, 'SAR Measurement Requirements for 100 MHz to 6 GHz'

Additional Documentation:

d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end
 of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
 positioned under the liquid filled phantom. The impedance stated is transformed from the
 measurement at the SMA connector to the feed point. The Return Loss ensures low
 reflected power. No uncertainty required.
- Electrical Delay: One-way detay between the SMA connector and the antenna feed point.
 No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Detricate No: 05GHzV2 (023 Jan17

Page 2 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 316 of 328

Measurement Conditions

DASY eystern configuration, as far as not given on page 1.

DASY Version	DASYS	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4,0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz ± 1 MHz 5300 MHz ± 1 MHz 5600 MHz ± 1 MHz 5600 MHz ± 1 MHz	

Head TSL parameters at 5200 MHz

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	38.0	4.66 mhp/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.4 ± 6 %	4.45 mho/m ± 6.%
Hend TSL temperature change during test	<05℃		-

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.55 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	75.2 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm3 (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.16 W/kg
SAR for numinal Head TSL parameters	normalized to 1W	21.5 W/kg ± 19.5 % (k=2)

Certificate No: D5GHzV2-1923_Jan17

Page 3 of 18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 317 of 328

Head TSL parameters at 5300 MHz

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35,2 ± 6 %	4.55 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	-	

SAR result with Head TSL at 5300 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.22 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.8 W / kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.35 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.3 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5600 MHz

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	347 = 6%	4.85 mho/m ± 6 %
Head TSL temperature change during test	< 0.5°C	-	1000

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm3 (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.22 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.7 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm2 (10 g) of Head TSL	condition	
SAR measured	100 mW Input power	2.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.1 W/kg ± 19.5 % (k=2)

Certificate No: D5GHzV2-1023_Jan17

Page 4 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 318 of 328

Head TSL parameters at 5800 MHz

The following paramaters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	344±6%	5 05 mha/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	-	_

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm ² (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.82 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	77.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ² (10 g) of Head TSL	condition	
SAR measured	100 mW input power	.2.22 W/kg
SAR for nominal Head TSL parameters.	normalized to 1W	22.0 W/kg ± 19.5 % (k=2)

Gertificate No: D5GHzV2-1025_Jan 17

Page 5 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 319 of 328

Body TSL parameters at 5200 MHz

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 0	49.0	5:30 mha/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.5 ± 6 %	5.36 mho/m ± 6 %
Body TSL temperature change during test	≥0.5 ℃		_

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7,32 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	72.8 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm2 (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.05 W/kg
SAR for nominal Body TSL parameters.	normalized to 1W	20.3 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5300 MHz

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.3±6%	5,50 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	-400	-

SAR result with Body TSL at 5300 MHz

SAR averaged over 1 cm2 (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.68 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	76.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm2 (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.15 W/kg
SAR for nominal Body TSL parameters	Normalized to 1V/	21.3 W/kg = 19.5 % (k=2)

Sertificate No: D5GHzV2-1023_Jen 17

Page B of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 320 of 328

Body TSL parameters at 5600 MHz

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mha/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.6 ± 6 %	5.90 mho/m ±6 %
Body TSL temperature change during test	< 0.5 €	_	

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL.	Condition	
SAR measured	100 mW input power	8.02 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	79.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm3 (10 g) of Body TSL	condition	
SAR measured	100 inW input power	2.26 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.4 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5800 MHz

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6,00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	48.3 ± 6 %	6.17 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	_	-

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm2 (1 g) of Body TSL	Condition	
SAR measured	100 mW Imput power	7.64 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.9 W/kg ± (9.9 % (k=2)

SAR averaged over 10 cm2 (10 g) of Body TSL	condition	
SAF massured	100 mW input power	2.13 W/kg
SAR for nominal Body TSL parameters	normalized to fW	21.1 W/kg ± 19.5 % (k=2)

Certificate No: D5GHzV2-1023_Jan17

Page 7 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 321 of 328

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	49.6 Ω - 6.7 Ω	
Return Loss	- 23.4 dB	

Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to feed point	49.0 Ω = 1.8 jΩ	
Return Loss	+33.5 dB	

Antenna Parameters with Head TSL at 5600 MHz

Impedance, fransformed to feed point	54.1 Ω = 0.2 jΩ	
Fleturn Loss	- 28.2 dB	

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	55.4 \(\Omega + 2.8 \)	
Fletum Loss	-24.8 dB	

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	48.9 Ω - 7.0 jΩ
Return Loss	- 22.9 dB

Antenna Parameters with Body TSL at 5300 MHz

Impedance, transformed to feed point	51.0 Ω - 1.0 jΩ	
Return Loss	- 37.0 dB	

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	55.6 Ω + 1.5 βΩ	
Return Loss	- 25.2 dB	

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	56.6 Ω + 2.7 jΩ
Return Loss	= 23.6 dB

Certificate No: D5GHzV2-1023 Jan17

Page 8 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 322 of 328

General Antenna Parameters and Design

Electrical Delay (one direction)	1.199 ns
The state of the s	7.210000

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedboint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	February 05, 2004

Certificate No: D5GHzV2-1023_Jan17 Page 9 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holed of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.



Page: 323 of 328

DASY5 Validation Report for Head TSL

Date: 20101-2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1023

Communication System: UID 0 - CW;

Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: f = 5200 MHz; $\alpha = 4.45$ S/m; $\epsilon_c = 35.4$; $\rho = 1000$ kg/m

Medium parameters used: l = 5300 MHz; $\sigma = 4.55 \text{ S/m}$; $\tilde{\epsilon}_r = 35.2$; $\rho = 1000 \text{ kg/m}^3$.

Medium parameters used: l = 5600 MHz; n = 4.85 S/m; $\epsilon_r = 34.7$; $\rho = 1000 \text{ kg/m}^2$.

Medium parameters used: f = 5800 MHz: $\pi = 5.05 \text{ S/m}$; $g_t = 34.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEBE/IEC/ANSI C63, 19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN3503; ConvF(5.76, 5.76, 5.76); Calibrated: 31.12.2016, ConvF(5.35, 5.35, 5,35); Calibrated. 31.12.2016, ConvF(5.09, 5.09, 5.09); Calibrated: 31.12.2016, ConvF(5.0). 5.01 5.01); Calibrated: 31.12.2016;
- Sensor-Surface: LAmm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.01.2017
- Phantom: Flut Phuntom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan.

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.58 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 27.6 W/kg

SAR(1 g) = 7.55 W/kg; SAR(10 g) = 2.16 W/kg

Miximum value of SAR (measured) = 17.4 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 73.01 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 31,6 W/kg

SAR(1 g) = 8.22 W/kg; SAR(10 g) = 2.35 W/kg

Maximum value of SAR (measured) = 19.3 W/kg.

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 71.94 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 33.2 W/kg

SAR(1 g) = 8.22 W/kg; SAR(10 g) = 2.33 W/kg

Maximum value of SAR (measured) = 19.8 W/kg

Cemticate No: 05GHzV2-1023_Jan17

Page 10 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 324 of 328

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 69.84 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 32.7 W/kg

SAR(1 g) = 7.82 W/kg; SAR(10 g) = 2.22 W/kg

Maximum value of SAR (measured) = 19.5 W/kg



0 dB = 17.4 W/kg = 12.41 dBW/kg

Certificate No: D5GHzV2-1023 Jan17

Page 11 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 325 of 328

Impedance Measurement Plot for Head TSL

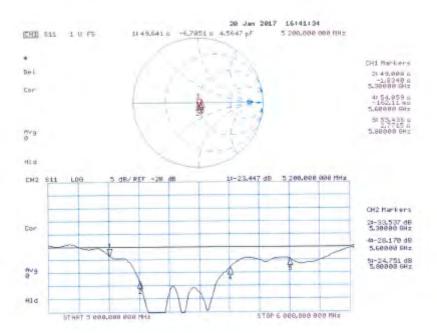

Certificate No: D6GHzV2-1023_Jan17

Page 12 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

f (886-2) 2298-0488

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 326 of 328

DASY5 Validation Report for Body TSL

Date: 19.01-2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1023

Communication System: UID:0 - CW;

Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: f = 5200 MHz; $\sigma = 5.36 \text{ S/m}$; $\epsilon_i = 47.5$; $\rho = 1000 \text{ kg/m}^3$. Medium parameters used: f = 5300 MHz; $\sigma = 5.5 \text{ S/m}$; $\epsilon_i = 47.3$; $\rho = 1000 \text{ kg/m}^3$.

Medium parameters used: i' = 5600 MHz; a' = 5.9 S/m; $v_i = 46.6$; $p = 1000 \text{ kg/m}^3$.

Medium parameters used: f = 5800 MFIz; $\sigma = 6.17 \text{ S/m}$; $\epsilon_r = 46.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard; DASY5 (IEEE/IEC/ANSI C63,19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN3503; ConvF(5,29, 5,29, 5,29); Calibrated: 31.12.2016, ConvF(5,04, 5,04, 5,04); Calibrated: 31.12.2016, ConvF(4,57, 4,57, 4,57); Calibrated: 31.12.2016, ConvF(4,48, 4,48, 4,48); Calibrated: 31.12.2016;
- · Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601, Calibrated: 04.01.2017
- Phantom: Flat Phantom 5,0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.54 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 28.1 W/kg

SAR(1 g) = 7.32 W/kg; SAR(10 g) = 2.05 W/kg

Maximum value of SAR (measured) = 16.6 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.93 V/m; Power Drift = -0.07 dB

Penk SAR (extrapolated) = 30.1 W/kg

SAR(1 g) = 7.66 W/kg; SAR(10 g) = 2.15 W/kg

Maximum value of SAR (measured) = 17.6 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.09 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 33.7 W/kg

SAR(1 g) = 8.02 W/kg; SAR(10 g) = 2.26 W/kg

Maximum value of SAR (measured) = 18.9 W/kg

Certificate No. D5GHzV2-1023 Jan17

Page 12 of 16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 327 of 328

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.14 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 34.0 W/kg

SAR(1 g) = 7.64 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 18.3 W/kg



0 dB = 16.6 W/kg = 12.20 dBW/kg

Certificate No: D5GHzV2-1023_Jan17

Page 14 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 328 of 328

Impedance Measurement Plot for Body TSL

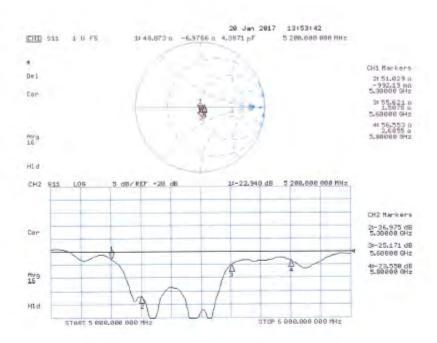

Certificate No: D5GHzV2-1023_Jan17

Page 15 of 15

- End of 1st part of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holed of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.