




FCC RADIO TEST REPORT

FCC ID : HLZA24003
Equipment : Tablet PC
Brand Name : acer
Model Name : A24003
Marketing Name : Acer Iconia Tab A10, A10-21
Applicant : Acer Incorporated
8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist.,
New Taipei City 22181, Taiwan (R.O.C)
Manufacturer : Acer Incorporated
8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist.,
New Taipei City 22181, Taiwan (R.O.C)
Standard : FCC Part 15 Subpart C §15.247

The product was received on May 28, 2024 and testing was performed from Jun. 04, 2024 to Jun. 24, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 Test Result.....	12
3.1 6dB and 99% Bandwidth Measurement	12
3.2 Output Power Measurement.....	13
3.3 Power Spectral Density Measurement	14
3.4 Conducted Band Edges and Spurious Emission Measurement	15
3.5 Radiated Band Edges and Spurious Emission Measurement	16
3.6 AC Conducted Emission Measurement.....	20
3.7 Antenna Requirements.....	22
4 List of Measuring Equipment	23
5 Measurement Uncertainty	25
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR452713B	01	Initial issue of report	Jul. 02, 2024
FR452713B	02	Revise Appendix C. This report is an updated version, replacing the report issued on Jul. 02, 2024	Jul. 05, 2024

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	2.08 dB under the limit at 4880.00 MHz
3.6	15.207	AC Conducted Emission	Pass	7.41 dB under the limit at 0.16 MHz
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Danny Lee

Report Producer: Mila Chen



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, and GNSS.
Antenna Type WLAN: PIFA Antenna Bluetooth: PIFA Antenna GPS / BDS: PIFA Antenna

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	1.84

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

SKU List				
	SKU1_4G+64G	SKU2_4G+64G	SKU3_4G+128G	SKU4_4G+128G
Memory	Shenzhen Gcai Electronic Technology Co., /4GB/GD84D32MJ0-4 2C2	Rayson/4GB/RS1G32 LF4D2BDS-53BT	Shenzhen Gcai Electronic Technology Co., /4GB/GD84D32MJ0-4 2C2	Rayson/4GB/RS1G32LO 4D2BDS-53BT
eMMC	Rayson/64GB/RS70B 64G4S16G	Shenzhen Techwinsemi Technology Co., Ltd. /64GB/UEMCGS63S0	Rayson/128GB/RS70 BT7G4S09F	Shenzhen Techwinsemi Technology Co., Ltd. /128GB/UEMDGS63S0

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	TH05-HY, CO07-HY, 03CH21-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-



2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
Radiated Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1 :Bluetooth Link + WLAN (2.4GHz) Link + H-Patten + Earphone + SD Card + USB Cable (Charging from Adapter) for SKU 4
	Mode 2 : Bluetooth Link + WLAN (5GHz) Link + MPEG4 (Color Bar) + Earphone + SD Card + USB Cable (Charging from Adapter) for SKU 4
	Mode 3 : Bluetooth Link + WLAN (2.4GHz) Idle + Camera (Front) + Earphone + SD Card + USB Cable (Data Link with Notebook) (Read) for SKU 4
	Mode 4 : Bluetooth Link + WLAN (5GHz) Idle + Camera (Rear) + Earphone + SD Card + USB Cable (Data Link with Notebook) (Write) for SKU 4
	Mode 5 : Bluetooth Link + WLAN (2.4GHz) Link + GPS RX + Earphone + SD Card + USB Cable (Data Link with Notebook) (Read) for SKU 4
Remark: 1. The worst case of Conducted Emission is mode 3; only the test data of it was reported. 2. For Radiated Test Cases, the tests were performed with SKU 3. 3. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	

2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony	SBH20	PY7-RD0010	N/A	N/A
2.	GPS Emulator	Spectracom	GSG-6	N/A	N/A	N/A
3.	Earphone + Mic	Samsung	Ecouteur	N/A	Unshielded, 1.8m	N/A
4.	WLAN AP	ASUS	RT-AC52	MSQ-RTAC4A00	N/A	Unshielded, 1.8m
5.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
6.	iPod	Apple	A1199	FCC DoC	Shielded, 1.0m	N/A
7.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A



2.5 EUT Operation Test Setup

The RF test items, utility “ADB commend” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

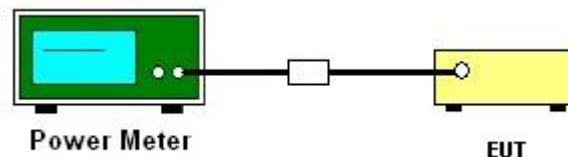

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

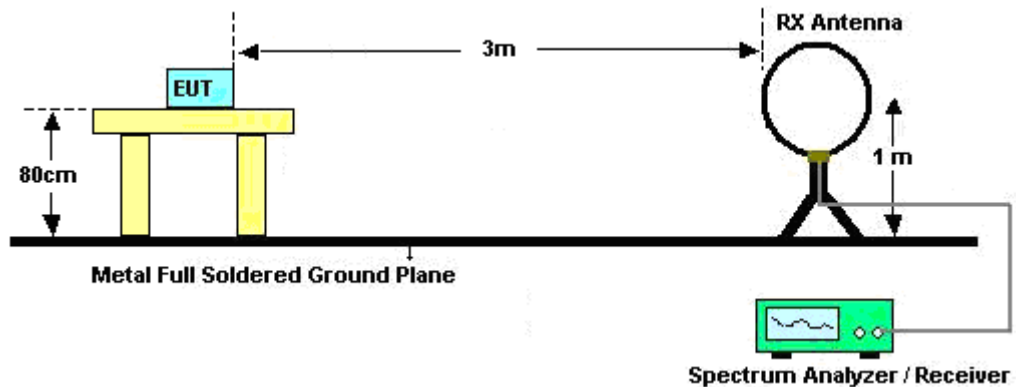


For radiated test from 30MHz to 1GHz

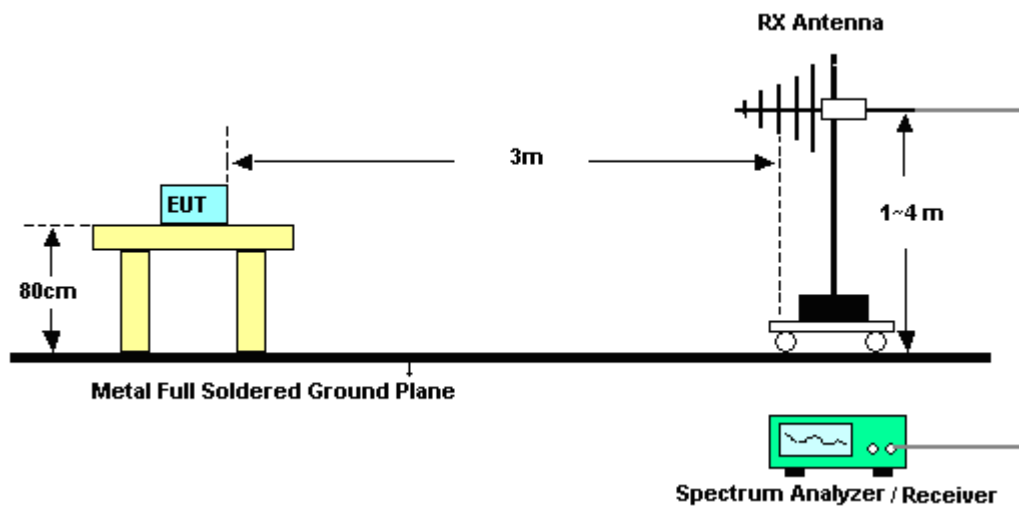

For radiated test from 1GHz to 18GHz

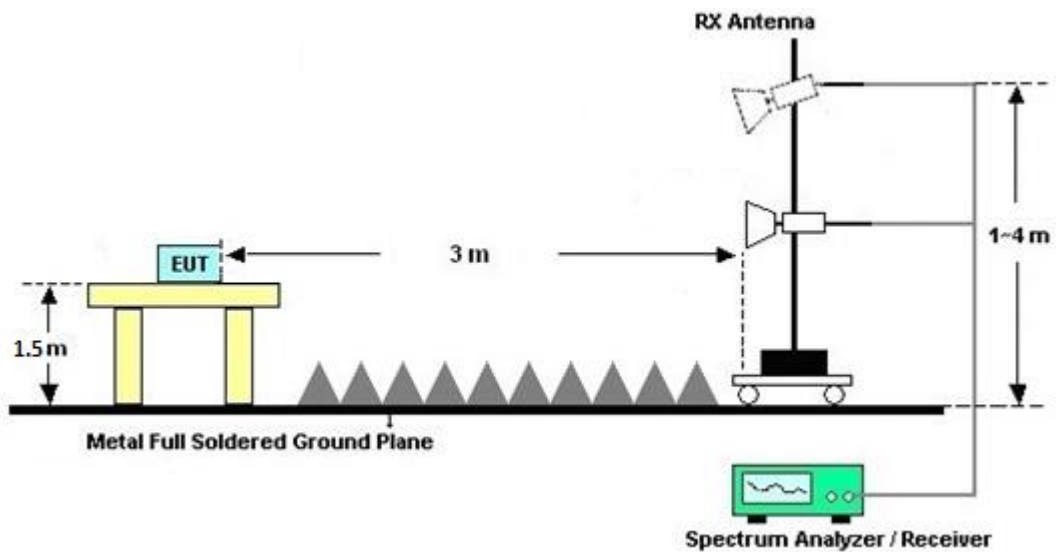

For radiated test above 18GHz

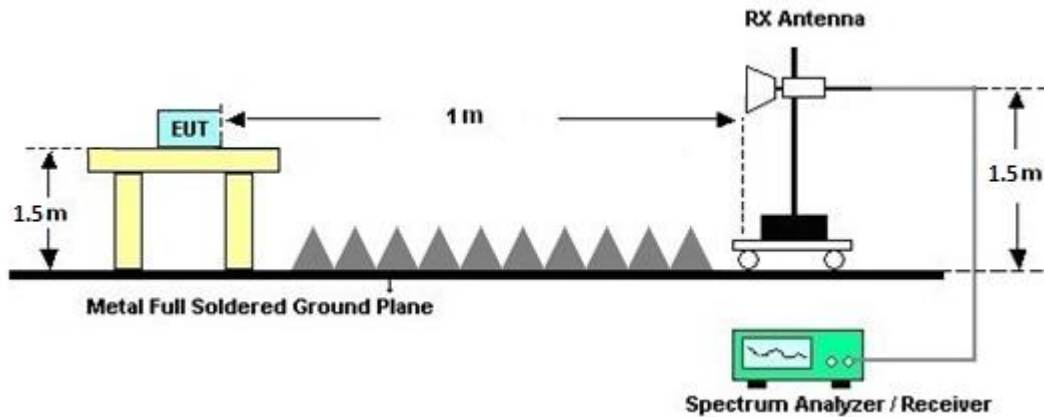

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

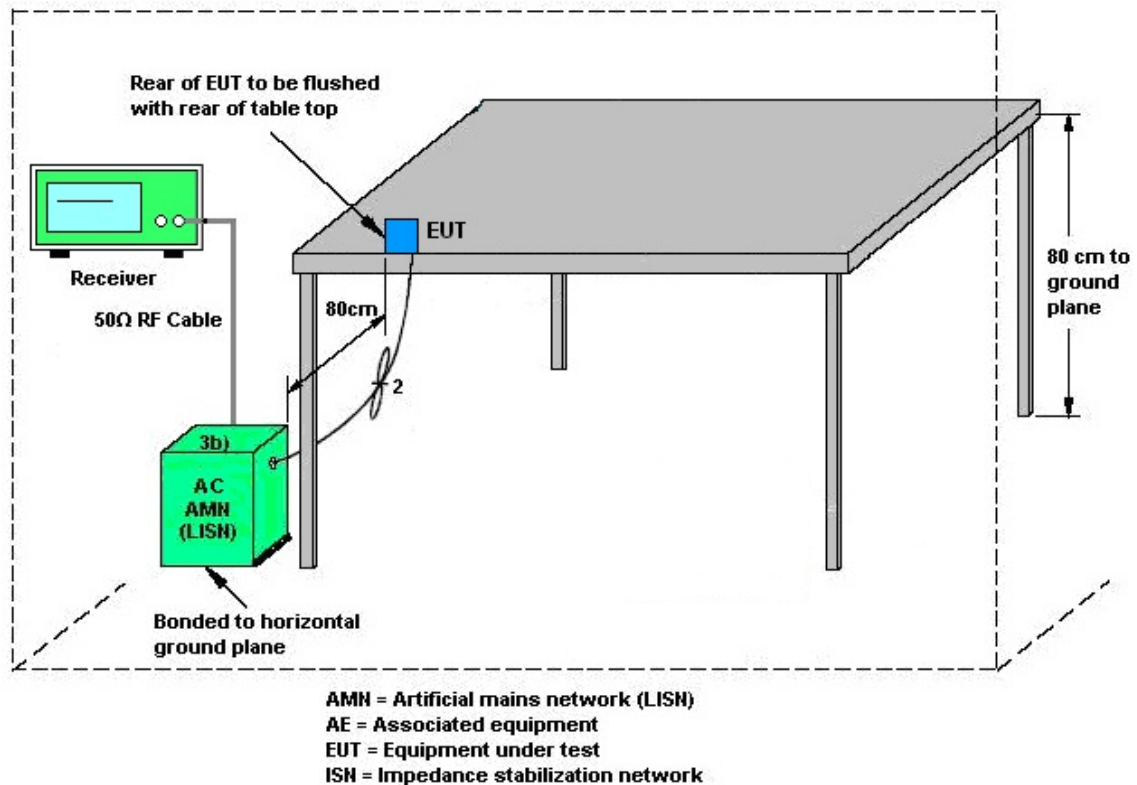

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Jun. 04, 2024	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jun. 04, 2024	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz~200MHz	Oct. 20, 2023	Jun. 04, 2024	Oct. 19, 2024	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 14, 2024	Jun. 04, 2024	Mar. 13, 2025	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 10, 2024	Jun. 04, 2024	Mar. 09, 2025	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 07, 2024	Jun. 04, 2024	Mar. 06, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 20, 2023	Jun. 04, 2024	Sep. 19, 2024	Conduction (CO07-HY)
LOOP Antenna	Rohde & Schwarz	HFH2-Z2	100488	9kHz~30MHz	Sep. 12, 2023	Jun. 12, 2024~ Jun. 24, 2024	Sep. 11, 2024	Radiation (03CH21-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63303 & 001	30MHz~1GHz	Oct. 15, 2023	Jun. 12, 2024~ Jun. 24, 2024	Oct. 14, 2024	Radiation (03CH21-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C03A18E N	1GHz~18GHz	Jul. 12, 2023	Jun. 12, 2024~ Jun. 24, 2024	Jul. 11, 2024	Radiation (03CH21-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz~40GHz	Jul. 10, 2023	Jun. 12, 2024~ Jun. 24, 2024	Jul. 09, 2024	Radiation (03CH21-HY)
Amplifier	SONOMA	310N	421580	30MHz~1GHz	Jul. 15, 2023	Jun. 12, 2024~ Jun. 24, 2024	Jul. 14, 2024	Radiation (03CH21-HY)
Amplifier	EMEC	EM01G18GA	060876	1GHz~18GHz	Sep. 28, 2023	Jun. 12, 2024~ Jun. 24, 2024	Sep. 27, 2024	Radiation (03CH21-HY)
Preamplifier	EMEC	EM18G40G	060871	18GHz~40GHz	Aug. 30, 2023	Jun. 12, 2024~ Jun. 24, 2024	Aug. 29, 2024	Radiation (03CH21-HY)
Spectrum Analyzer	Keysight	N9010B	MY62170358	10Hz~44GHz	Aug. 28, 2023	Jun. 12, 2024~ Jun. 24, 2024	Aug. 27, 2024	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 06, 2024	Jun. 12, 2024~ Jun. 24, 2024	Mar. 05, 2025	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804397/2,804612/2,804614/2	30MHz~40GHz	Oct. 24, 2023	Jun. 12, 2024~ Jun. 24, 2024	Oct. 23, 2024	Radiation (03CH21-HY)
Hygrometer	TECPEL	DTM-303A	TP211568	N/A	Oct. 30, 2023	Jun. 12, 2024~ Jun. 24, 2024	Oct. 14, 2024	Radiation (03CH21-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Jun. 12, 2024~ Jun. 24, 2024	N/A	Radiation (03CH21-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Jun. 12, 2024~ Jun. 24, 2024	N/A	Radiation (03CH21-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jun. 12, 2024~ Jun. 24, 2024	N/A	Radiation (03CH21-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Jun. 12, 2024~ Jun. 24, 2024	N/A	Radiation (03CH21-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	Jun. 05, 2024~ Jun. 19, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17I00015SNO 35 (NO:109)	10MHz~6GHz	Jan. 15, 2024	Jun. 05, 2024~ Jun. 19, 2024	Jan. 14, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2023	Jun. 05, 2024~ Jun. 19, 2024	Aug. 22, 2024	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101466	10HZ~44GHZ	Jan. 24, 2024	Jun. 05, 2024~ Jun. 19, 2024	Jan. 23, 2025	Conducted (TH05-HY)
Switch Control Mainframe	EM Electronics	EMSW18SE	SW191204 (BOX8)	N/A	Jan. 02, 2024	Jun. 05, 2024~ Jun. 19, 2024	Jan. 01, 2025	Conducted (TH05-HY)
Software1	Sporton	BTWIFI_Final_ version:1.0(20 24-04-11)	N/A	Conducted Items	N/A	Jun. 05, 2024~ Jun. 19, 2024	N/A	Conducted (TH05-HY)
Software2	Raditeq	RadiMation 2021.1.8	N/A	Conducted Power	N/A	Jun. 05, 2024~ Jun. 19, 2024	N/A	Conducted (TH05-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.44 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.4 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Wei Shun	Temperature:	21~25	°C
Test Date:	2024/6/5~2024/6/19	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.033	0.706	0.50	Pass
BLE	1Mbps	1	19	2440	1.035	0.706	0.50	Pass
BLE	1Mbps	1	39	2480	1.031	0.703	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	5.90	30.00	1.84	7.74	36.00	Pass
BLE	1Mbps	1	19	2440	6.10	30.00	1.84	7.94	36.00	Pass
BLE	1Mbps	1	39	2480	6.20	30.00	1.84	8.04	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	4.67	-10.25	1.84	8.00	Pass
BLE	1Mbps	1	19	2440	5.06	-9.83	1.84	8.00	Pass
BLE	1Mbps	1	39	2480	5.15	-9.74	1.84	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.074	1.268	0.50	Pass
BLE	2Mbps	1	19	2440	2.078	1.268	0.50	Pass
BLE	2Mbps	1	39	2480	2.070	1.266	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	5.90	30.00	1.84	7.74	36.00	Pass
BLE	2Mbps	1	19	2440	6.10	30.00	1.84	7.94	36.00	Pass
BLE	2Mbps	1	39	2480	6.20	30.00	1.84	8.04	36.00	Pass




TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	4.10	-12.56	1.84	8.00	Pass
BLE	2Mbps	1	19	2440	4.42	-12.20	1.84	8.00	Pass
BLE	2Mbps	1	39	2480	4.47	-12.16	1.84	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

**6dB Bandwidth**


<1Mbps>

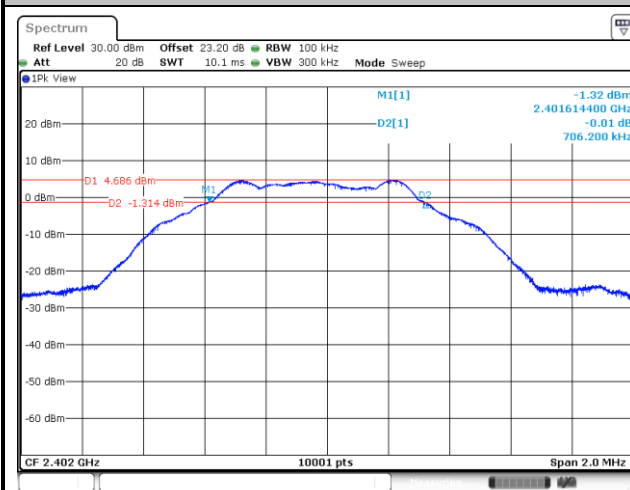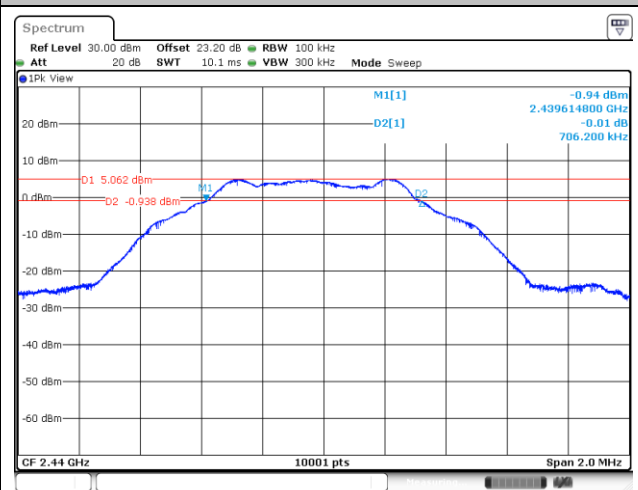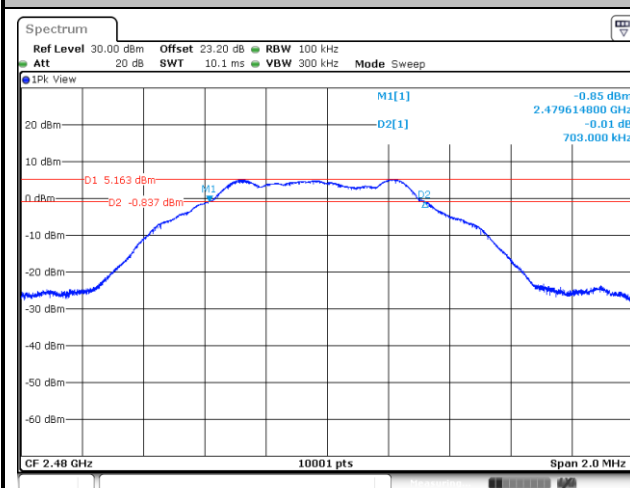6 dB Bandwidth Plot on Channel 00**6 dB Bandwidth Plot on Channel 19****6 dB Bandwidth Plot on Channel 39**




<2Mbps>


6 dB Bandwidth Plot on Channel 00

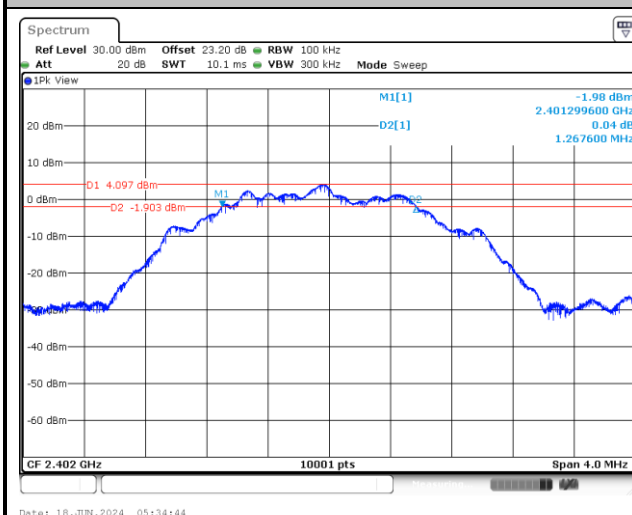

6 dB Bandwidth Plot on Channel 19



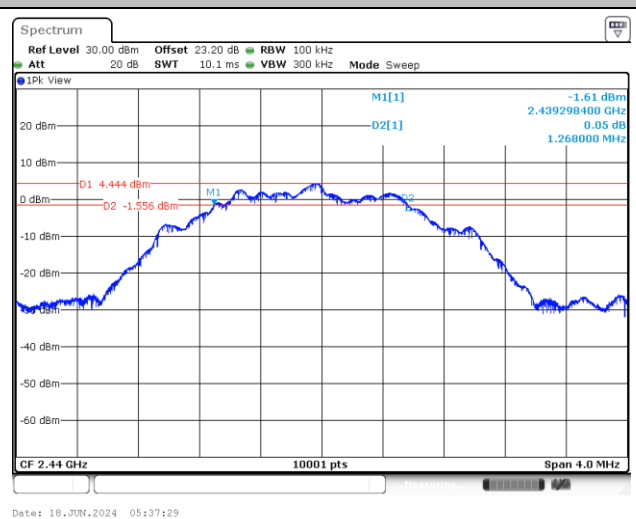


6 dB Bandwidth Plot on Channel 39

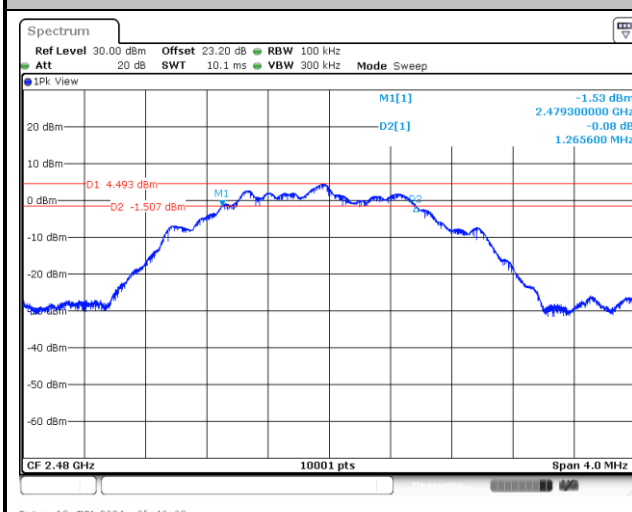

**99% Occupied Bandwidth**


<1Mbps>

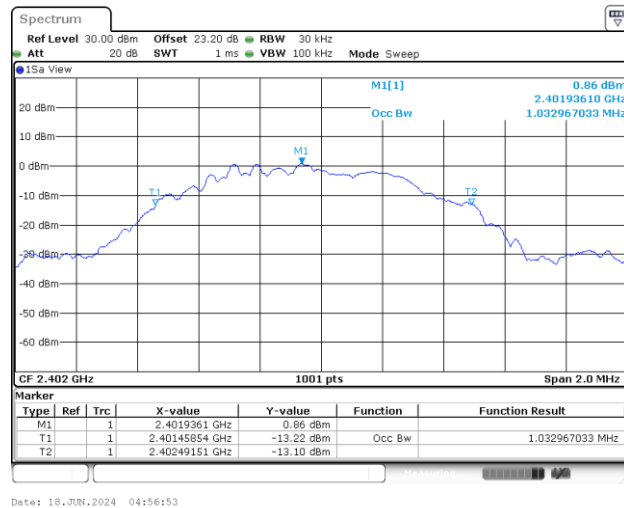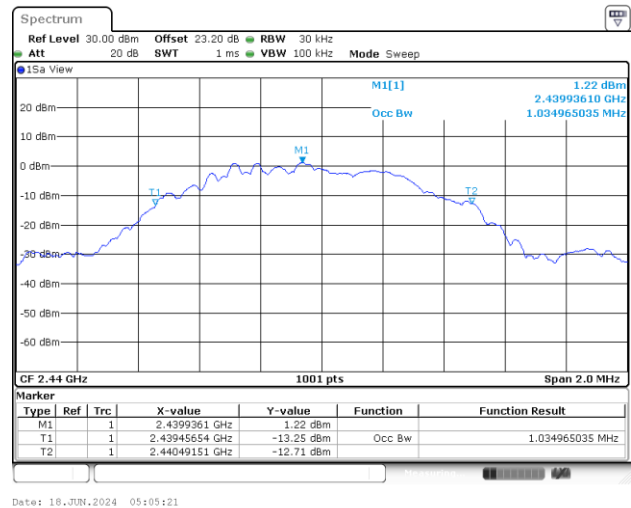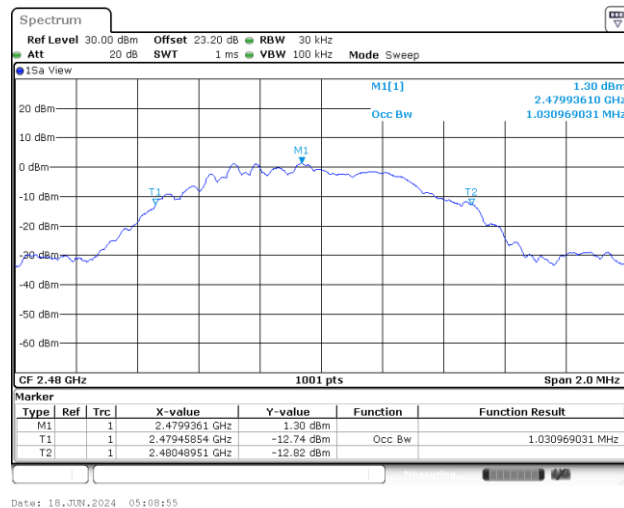99% Occupied Bandwidth Plot on Channel 00**99% Occupied Bandwidth Plot on Channel 19****99% Occupied Bandwidth Plot on Channel 39**




<2Mbps>


99% Occupied Bandwidth Plot on Channel 00

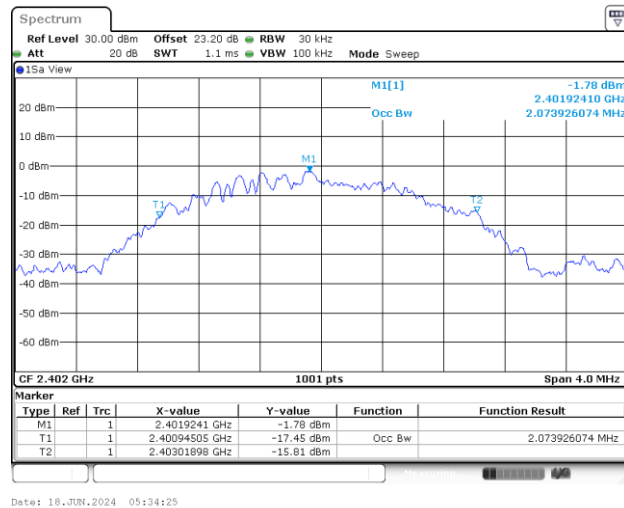

99% Occupied Bandwidth Plot on Channel 19



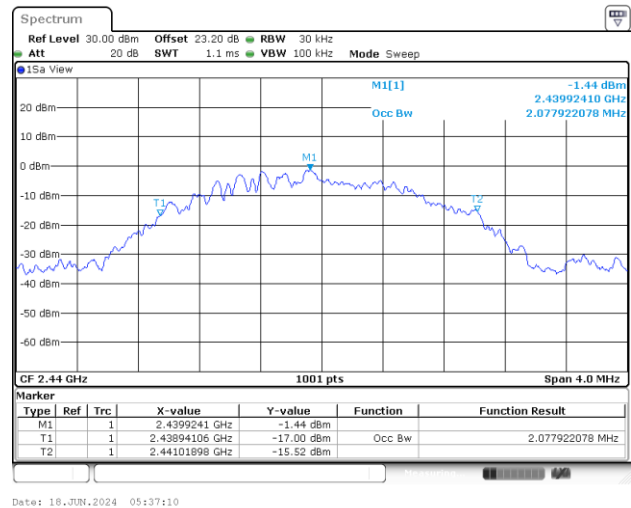


99% Occupied Bandwidth Plot on Channel 39

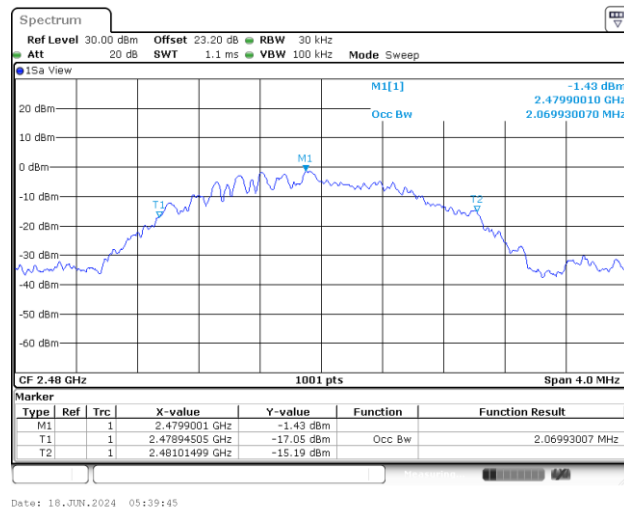

**Power Spectral Density (dBm/3kHz)**


<1Mbps>

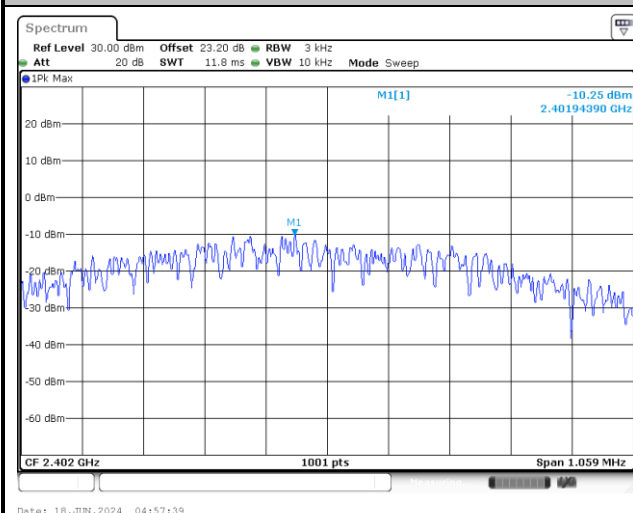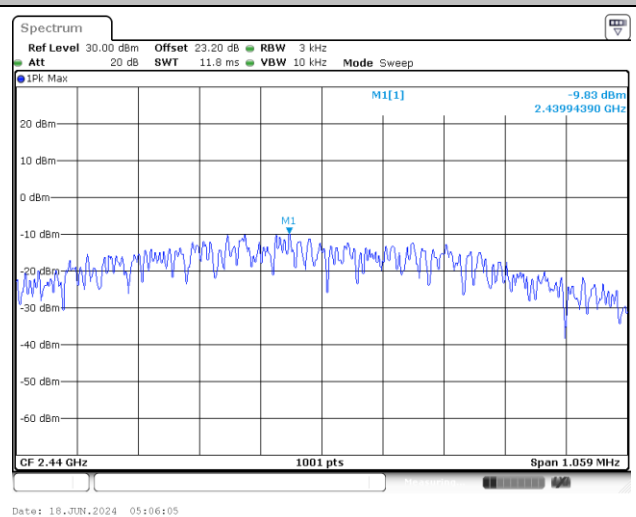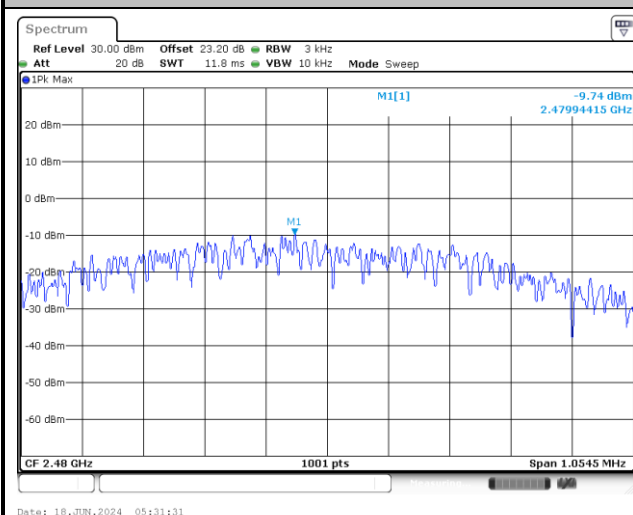Power Density (dBm/3kHz) Plot Channel 00**Power Density (dBm/3kHz) Plot Channel 19****Power Density (dBm/3kHz) Plot Channel 39**




<2Mbps>


Power Density (dBm/3kHz) Plot Channel 00

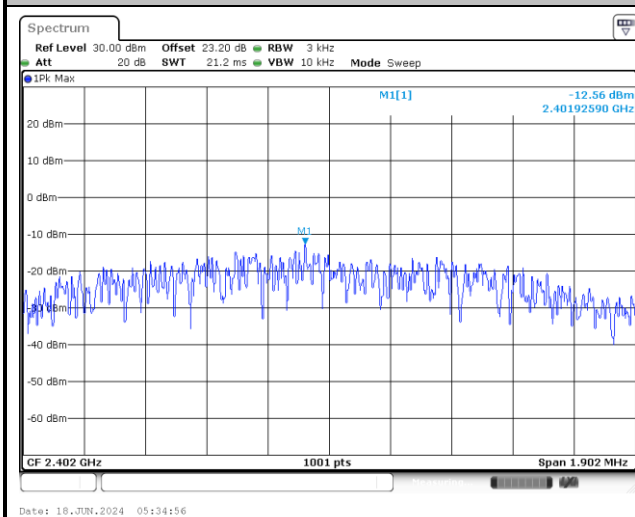

Power Density (dBm/3kHz) Plot Channel 19




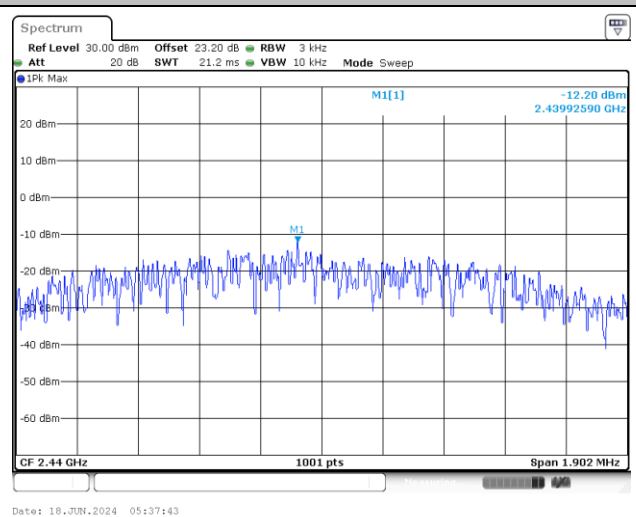


Power Density (dBm/3kHz) Plot Channel 39

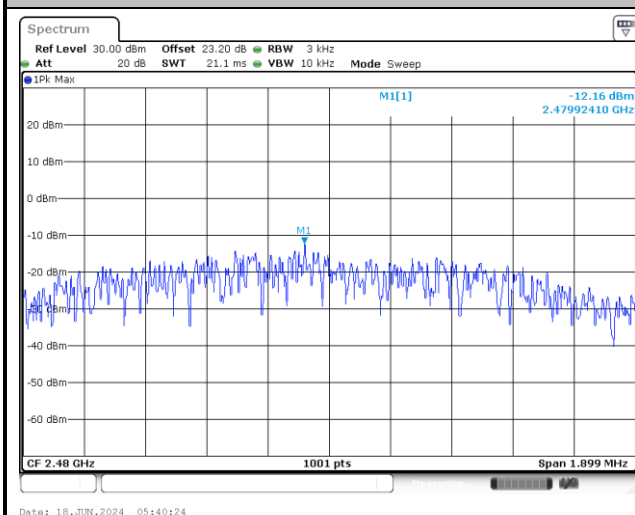

**Band Edge and Conducted Spurious Emission**


<1Mbps>

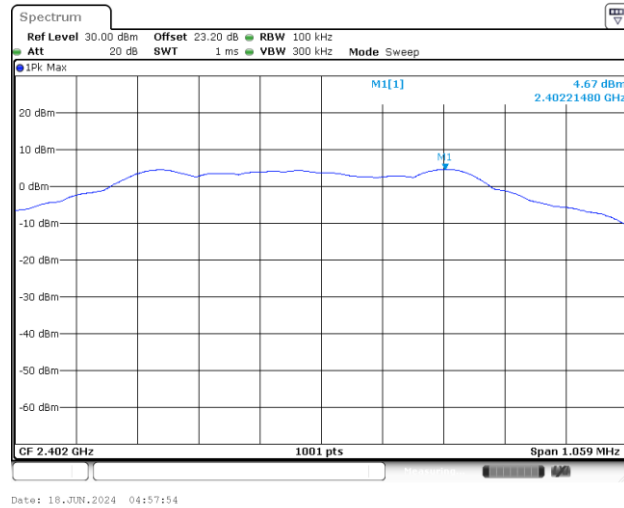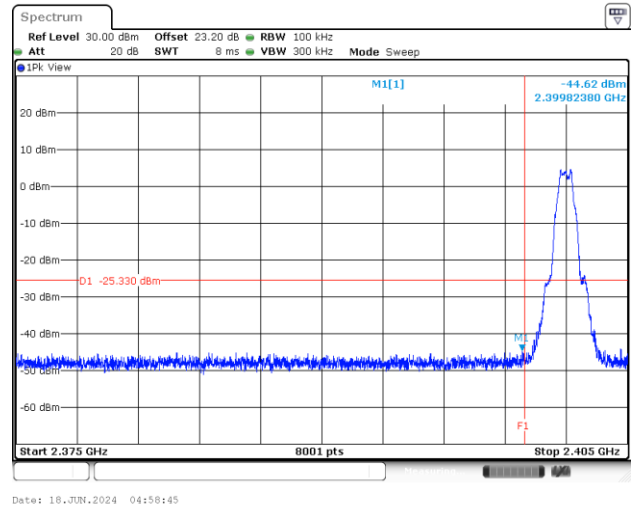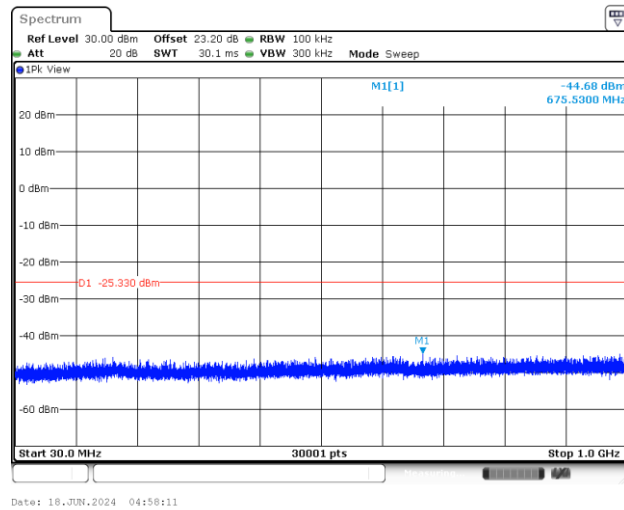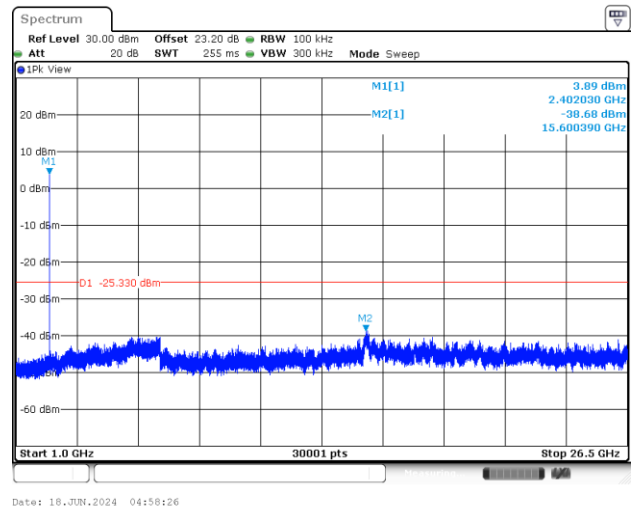Channel 00**100kHz PSD reference Level Plot****Low Channel Plot****Spurious Emission 30MHz~1GHz Plot****Spurious Emission 1GHz~26.5GHz Plot**




Channel 19

100kHz PSD reference Level Plot

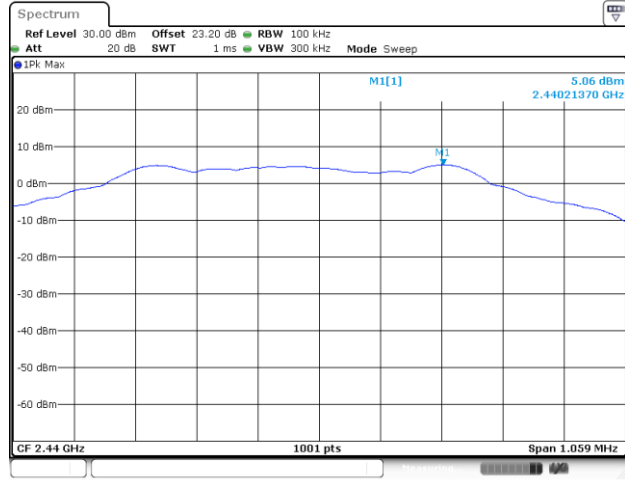


Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

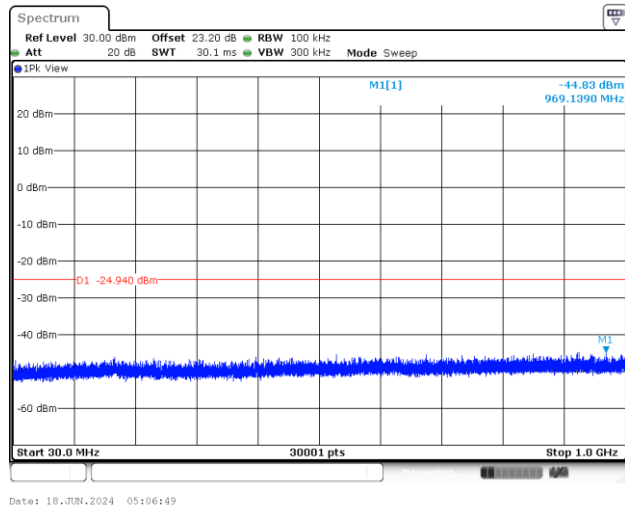


Spurious Emission 1GHz~26.5GHz Plot

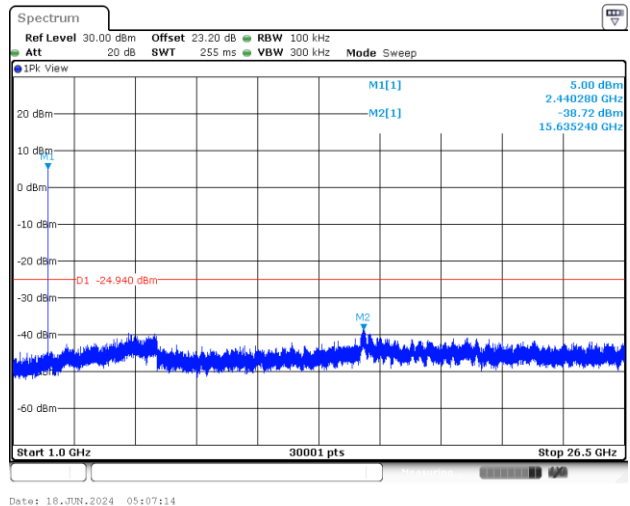




Channel 39


100kHz PSD reference Level Plot

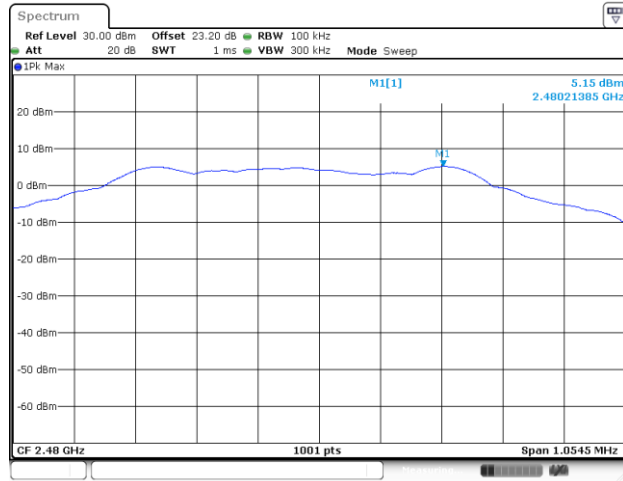


High Channel Plot

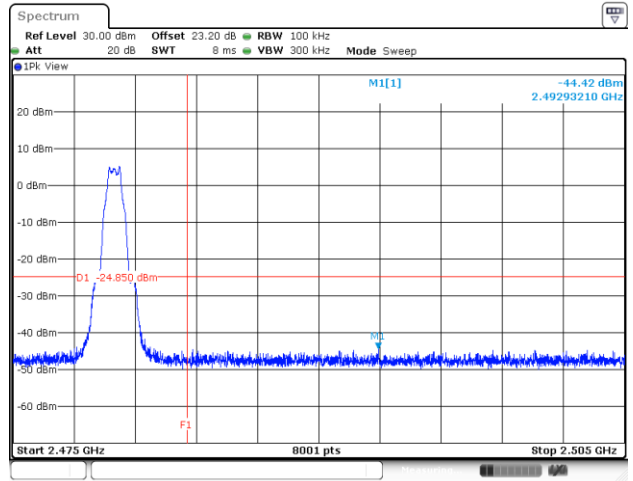

Spurious Emission 30MHz~1GHz Plot

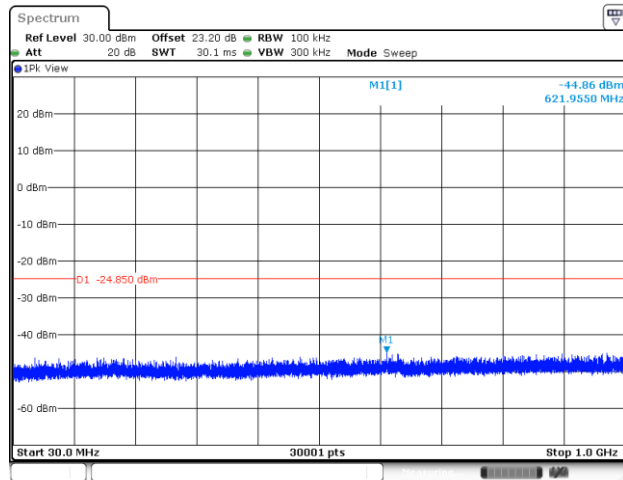


Spurious Emission 1GHz~26.5GHz Plot

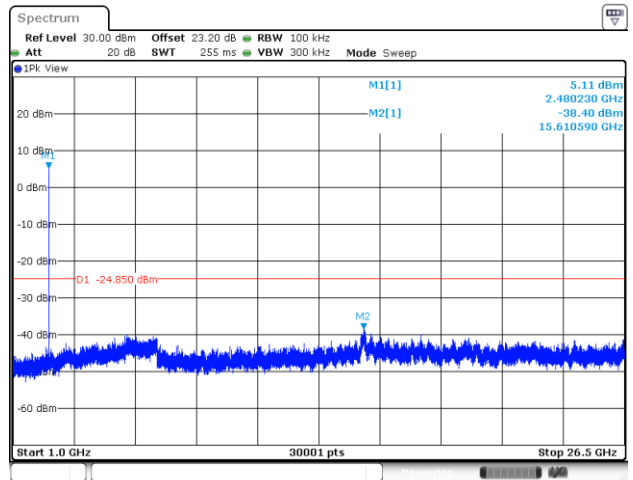




<2Mbps>

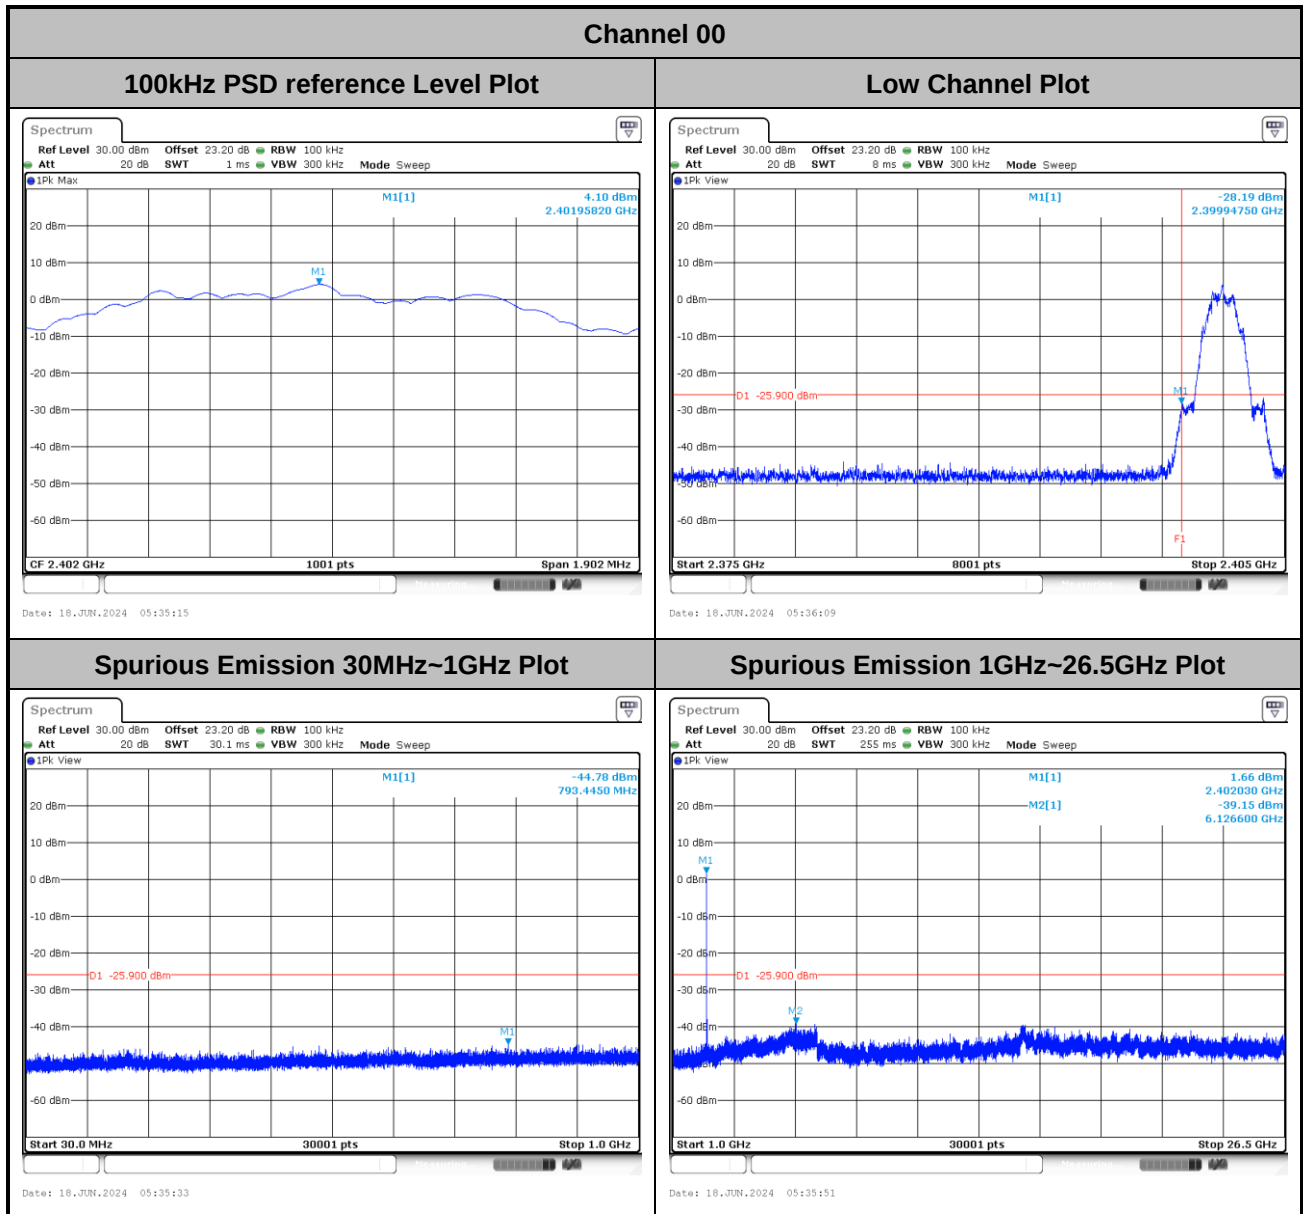




Channel 19

100kHz PSD reference Level Plot

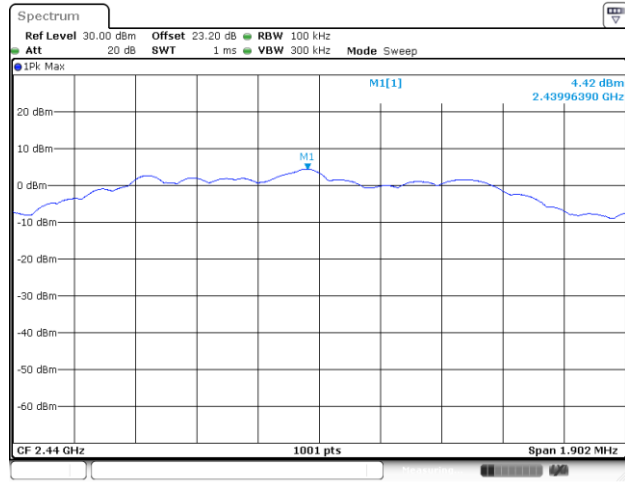


Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

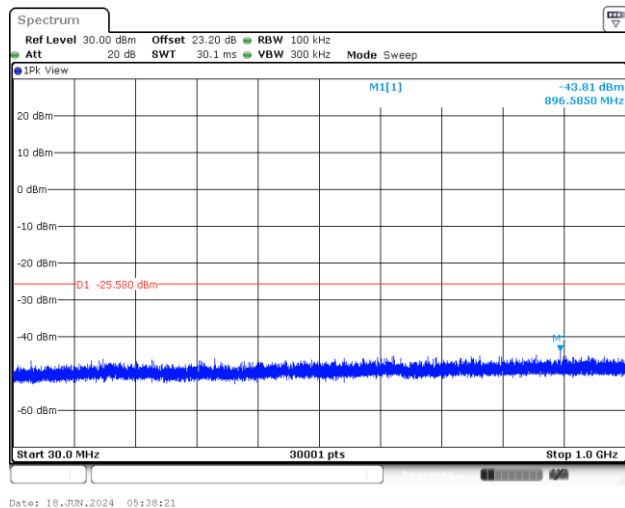


Spurious Emission 1GHz~26.5GHz Plot

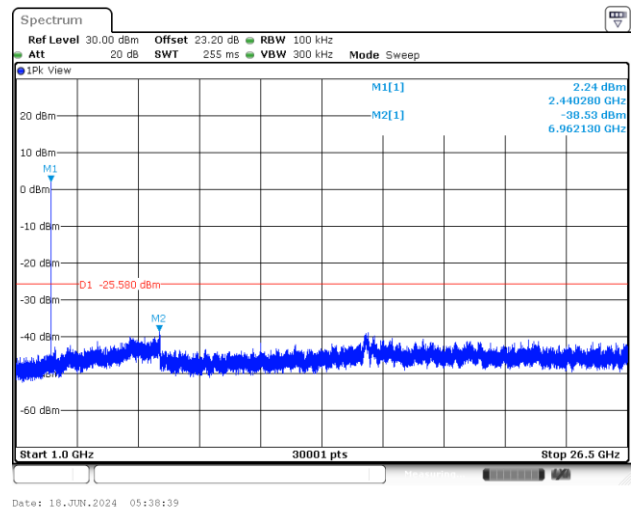




Channel 39


100kHz PSD reference Level Plot

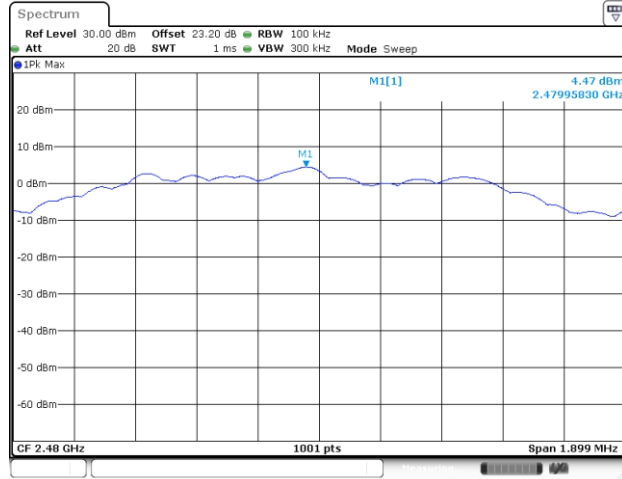


High Channel Plot

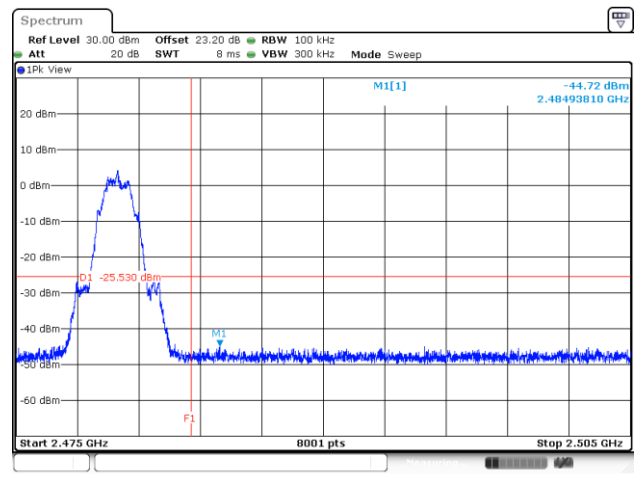

Spurious Emission 30MHz~1GHz Plot

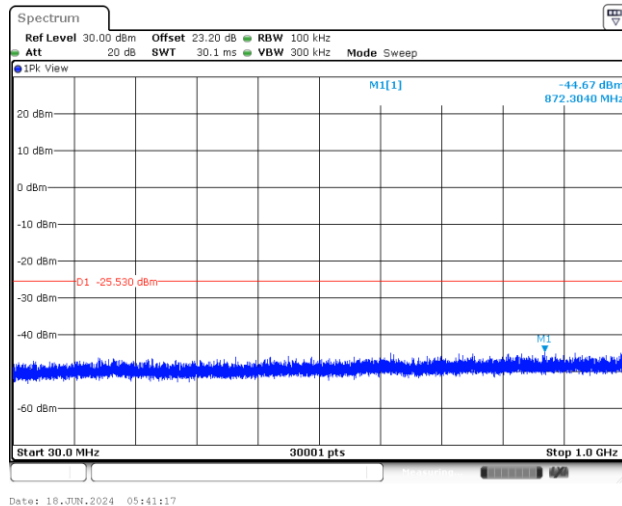

Spurious Emission 1GHz~26.5GHz Plot

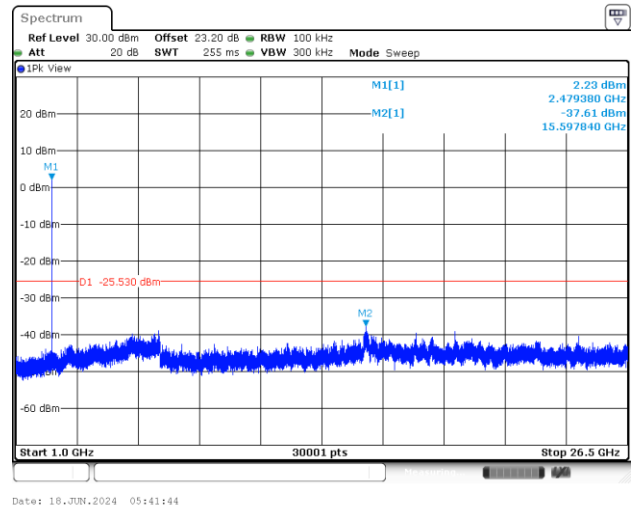




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	22.8~24.6℃
		Relative Humidity :	53.4~61.2%

EUT Information

Report NO : 452713
 Test Mode : Mode 3
 Test Voltage : Power from system
 Phase : Line

Full Spectrum

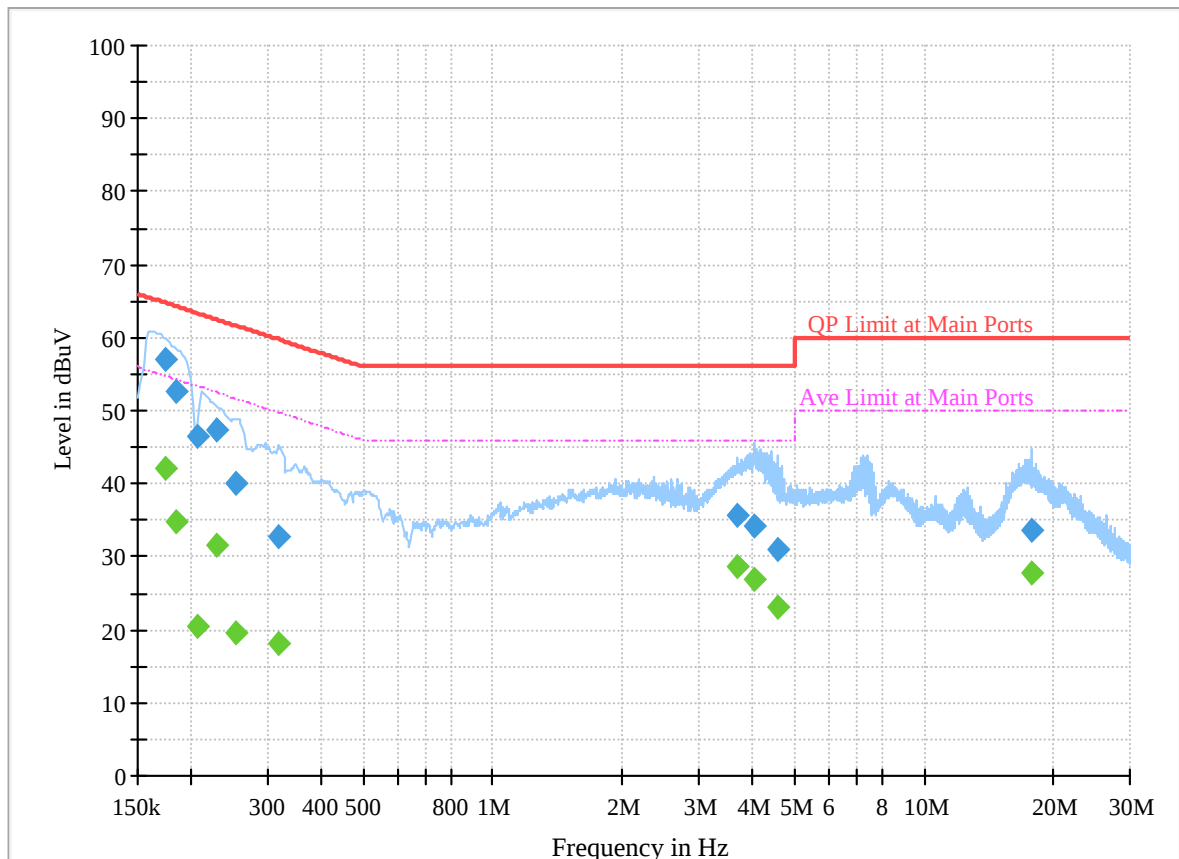

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.173310	---	42.09	54.80	12.71	L1	OFF	19.9
0.173310	57.06	---	64.80	7.74	L1	OFF	19.9
0.183750	---	34.82	54.31	19.49	L1	OFF	19.9
0.183750	52.52	---	64.31	11.79	L1	OFF	19.9
0.206250	---	20.43	53.36	32.93	L1	OFF	19.9
0.206250	46.63	---	63.36	16.73	L1	OFF	19.9
0.228750	---	31.65	52.50	20.85	L1	OFF	19.9
0.228750	47.46	---	62.50	15.04	L1	OFF	19.9
0.253500	---	19.59	51.64	32.05	L1	OFF	19.9
0.253500	40.00	---	61.64	21.64	L1	OFF	19.9
0.319740	---	18.08	49.71	31.63	L1	OFF	19.9
0.319740	32.66	---	59.71	27.05	L1	OFF	19.9
3.679350	---	28.72	46.00	17.28	L1	OFF	20.0
3.679350	35.62	---	56.00	20.38	L1	OFF	20.0
4.026750	---	26.80	46.00	19.20	L1	OFF	20.0
4.026750	34.21	---	56.00	21.79	L1	OFF	20.0
4.569900	---	23.15	46.00	22.85	L1	OFF	20.0
4.569900	31.07	---	56.00	24.93	L1	OFF	20.0
17.697030	---	27.74	50.00	22.26	L1	OFF	20.1

17.697030	33.55	---	60.00	26.45	L1	OFF	20.1
-----------	-------	-----	-------	-------	----	-----	------

EUT Information

Report NO : 452713
 Test Mode : Mode 3
 Test Voltage : Power from system
 Phase : Neutral

Full Spectrum

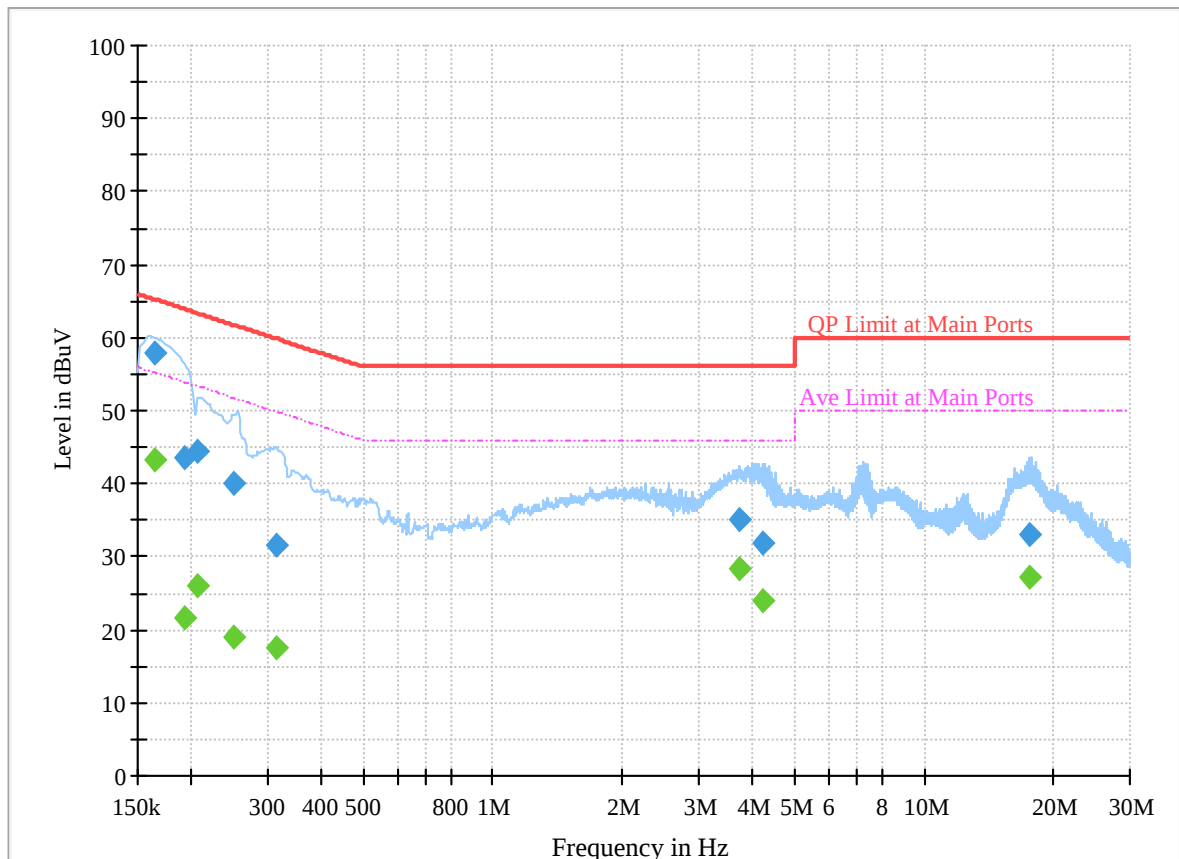

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.164670	---	43.34	55.23	11.89	N	OFF	19.9
0.164670	57.82	---	65.23	7.41	N	OFF	19.9
0.192750	---	21.66	53.92	32.26	N	OFF	19.9
0.192750	43.46	---	63.92	20.46	N	OFF	19.9
0.206250	---	25.92	53.36	27.44	N	OFF	19.9
0.206250	44.43	---	63.36	18.93	N	OFF	19.9
0.249450	---	18.94	51.78	32.84	N	OFF	19.9
0.249450	40.02	---	61.78	21.76	N	OFF	19.9
0.314250	---	17.50	49.86	32.36	N	OFF	19.9
0.314250	31.65	---	59.86	28.21	N	OFF	19.9
3.728040	---	28.26	46.00	17.74	N	OFF	20.0
3.728040	35.05	---	56.00	20.95	N	OFF	20.0
4.236000	---	23.88	46.00	22.12	N	OFF	20.0
4.236000	31.95	---	56.00	24.05	N	OFF	20.0
17.508840	---	27.10	50.00	22.90	N	OFF	20.2
17.508840	33.05	---	60.00	26.95	N	OFF	20.2

Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Jack Cheng, Ray Lung and Sky Chang	Temperature :	18~ 26°C
		Relative Humidity :	50~70%

<1Mbps>





C1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 6	2400-2483.5	1	Bluetooth-LE GFSK	00	2402	1Mbps	-	-
Mode 7	2400-2483.5	1	Bluetooth-LE GFSK	19	2440	1Mbps	-	-
Mode 8	2400-2483.5	1	Bluetooth-LE GFSK	39	2480	1Mbps	-	-
Mode 12	2400-2483.5	1	Bluetooth-LE GFSK	19	2440	1Mbps	-	SHF
Mode 13	2400-2483.5	1	Bluetooth-LE GFSK	19	2440	1Mbps	-	LF





C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
6	Bluetooth-LE GFSK	00	2368.05	41.44	54.00	-12.56	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE GFSK	00	4804.00	51.03	54.00	-2.97	H	Avg.	Pass	-	Harmonic
7	Bluetooth-LE GFSK	19	2365.38	41.40	54.00	-12.60	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE GFSK	19	4880.00	51.92	54.00	-2.08	V	Avg.	Pass	-	Harmonic
8	Bluetooth-LE GFSK	39	2483.86	41.60	54.00	-12.40	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE GFSK	39	4960.00	51.26	54.00	-2.74	V	Avg.	Pass	-	Harmonic
12	SHF	19	24735.29	40.23	74.00	-33.77	V	Peak	Pass	-	SHF
13	LF	19	72.68	28.13	40.00	-11.87	V	QP	Pass	-	LF

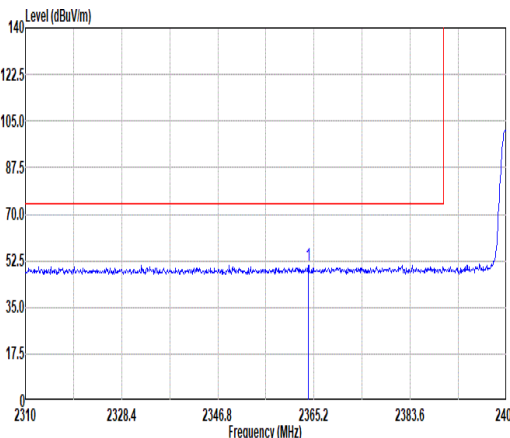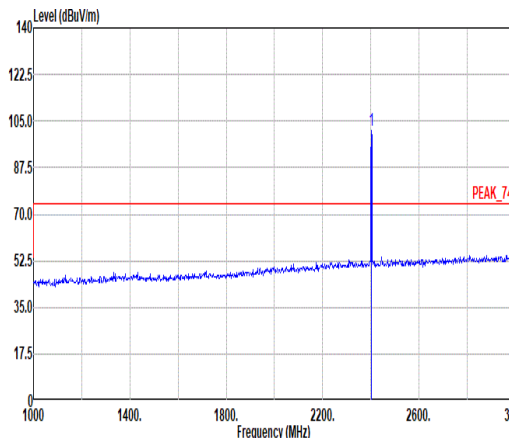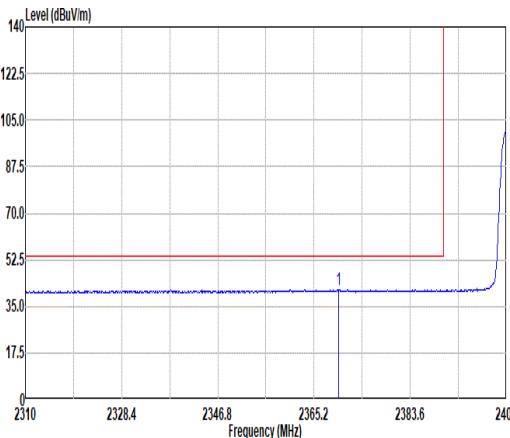
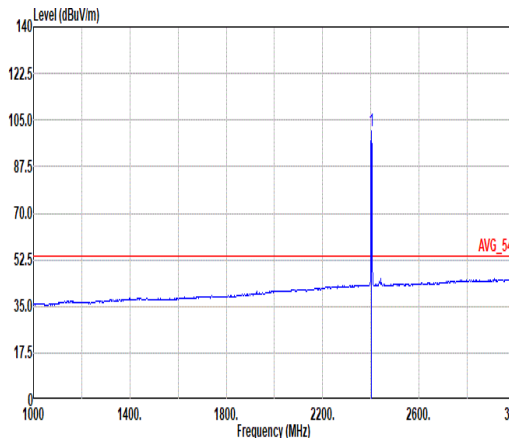


Mode	6																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_Bluetooth-LE GFSK _CH00_2402MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak																																																																																																		
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto						Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2364.10</td><td>50.95</td><td>74.00</td><td>-23.05</td><td>38.09</td><td>27.10</td><td>8.39</td><td>32.66</td><td>10.03</td><td>19</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2364.10	50.95	74.00	-23.05	38.09	27.10	8.39	32.66	10.03	19	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>101.58</td><td>-----</td><td>-----</td><td>88.69</td><td>27.08</td><td>8.46</td><td>32.68</td><td>10.03</td><td>100</td><td>19</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	101.58	-----	-----	88.69	27.08	8.46	32.68	10.03	100	19	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2364.10	50.95	74.00	-23.05	38.09	27.10	8.39	32.66	10.03	19	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2402.00	101.58	-----	-----	88.69	27.08	8.46	32.68	10.03	100	19	PEAK																																																																																						
Avg.																																																																																																		
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto						Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2369.09</td><td>41.32</td><td>54.00</td><td>-12.68</td><td>28.45</td><td>27.10</td><td>8.40</td><td>32.66</td><td>10.03</td><td>100</td><td>19</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2369.09	41.32	54.00	-12.68	28.45	27.10	8.40	32.66	10.03	100	19	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>100.99</td><td>-----</td><td>-----</td><td>88.10</td><td>27.08</td><td>8.46</td><td>32.68</td><td>10.03</td><td>100</td><td>19</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	100.99	-----	-----	88.10	27.08	8.46	32.68	10.03	100	19
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2369.09	41.32	54.00	-12.68	28.45	27.10	8.40	32.66	10.03	100	19	AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2402.00	100.99	-----	-----	88.10	27.08	8.46	32.68	10.03	100	19	AVERAGE																																																																																						

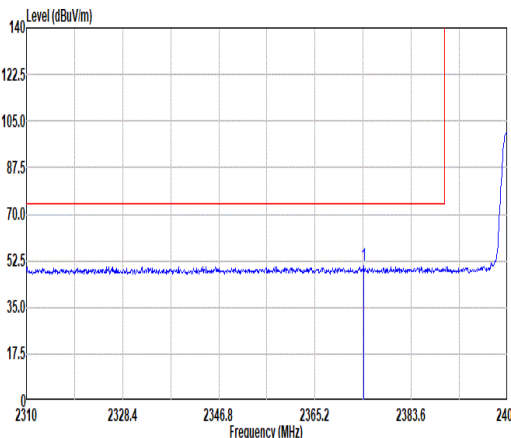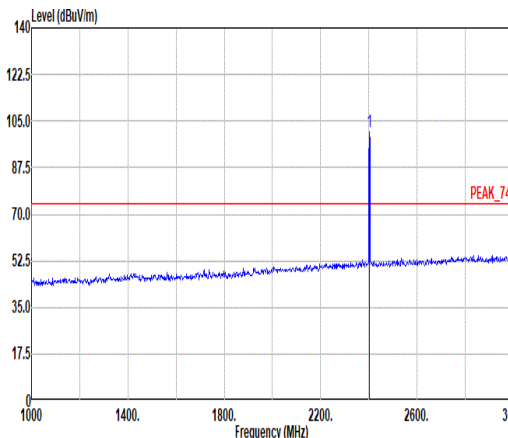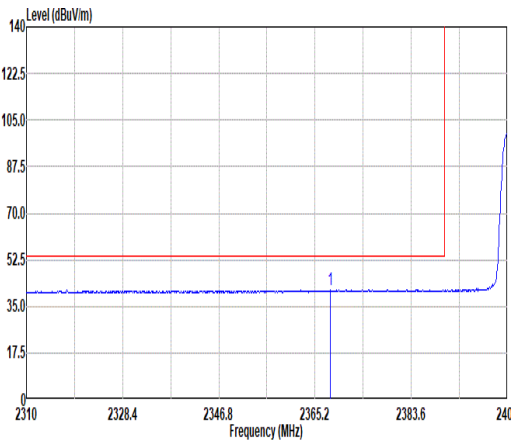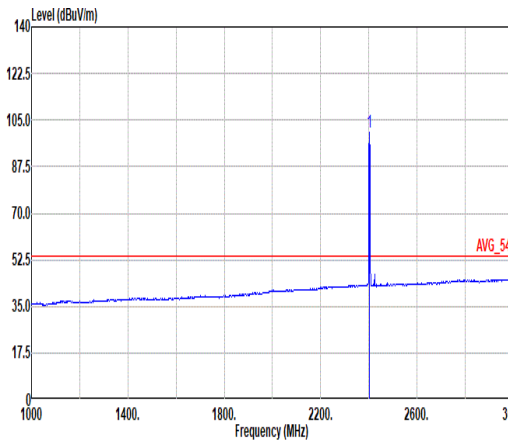



Mode	6																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE GFSK _CH00_2402MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto						Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2374.49</td><td>50.65</td><td>74.00</td><td>-23.35</td><td>37.81</td><td>27.06</td><td>8.41</td><td>32.66</td><td>10.03</td><td>357</td><td>233</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2374.49	50.65	74.00	-23.35	37.81	27.06	8.41	32.66	10.03	357	233	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>100.69</td><td>-----</td><td>-----</td><td>87.80</td><td>27.08</td><td>8.46</td><td>32.68</td><td>10.03</td><td>357</td><td>233</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	100.69	-----	-----	87.80	27.08	8.46	32.68	10.03	357	233
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2374.49	50.65	74.00	-23.35	37.81	27.06	8.41	32.66	10.03	357	233	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2402.00	100.69	-----	-----	87.80	27.08	8.46	32.68	10.03	357	233	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto						Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2368.05</td><td>41.44</td><td>54.00</td><td>-12.56</td><td>28.57</td><td>27.10</td><td>8.40</td><td>32.66</td><td>10.03</td><td>357</td><td>233</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2368.05	41.44	54.00	-12.56	28.57	27.10	8.40	32.66	10.03	357	233	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>100.16</td><td>-----</td><td>-----</td><td>87.27</td><td>27.08</td><td>8.46</td><td>32.68</td><td>10.03</td><td>357</td><td>233</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	100.16	-----	-----	87.27	27.08	8.46	32.68	10.03	357	233
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2368.05	41.44	54.00	-12.56	28.57	27.10	8.40	32.66	10.03	357	233	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2402.00	100.16	-----	-----	87.27	27.08	8.46	32.68	10.03	357	233	AVERAGE																																																																																							

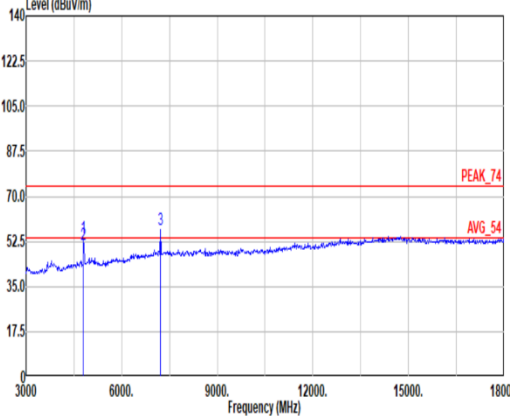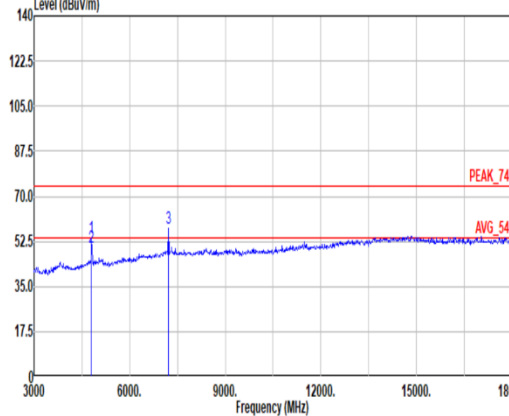





Mode	6												
	Harmonic												
	2400-2483.5_Bluetooth-LE GFSK _CH00_2402MHz												
ANT	1												
Pol.	Horizontal						Vertical						
Peak Avg.													
	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL						Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL						
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4804.00	54.10	74.00	-19.90	42.97	32.32	12.26	33.98	0.53	113	355	PEAK	
2	4804.00	51.03	54.00	-2.97	39.90	32.32	12.26	33.98	0.53	113	355	AVERAGE	
3	7206.00	57.07	-----	-----	41.12	36.83	15.02	36.36	0.46	--	--	PEAK	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4804.00	53.78	74.00	-20.22	42.65	32.32	12.26	33.98	0.53	305	217	PEAK	
2	4804.00	50.30	54.00	-3.70	39.17	32.32	12.26	33.98	0.53	305	217	AVERAGE	
3	7206.00	57.53	-----	-----	41.58	36.83	15.02	36.36	0.46	--	--	PEAK	

Remark: The unwanted signal #3 can be ignored since it falls within the non-restricted band and meet the requirements of 15.247 (d).

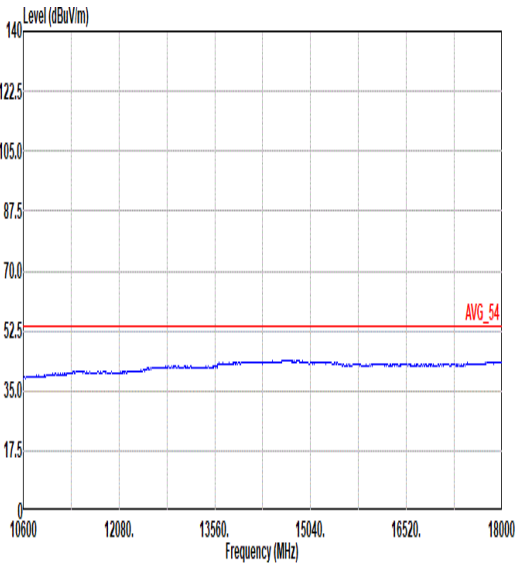
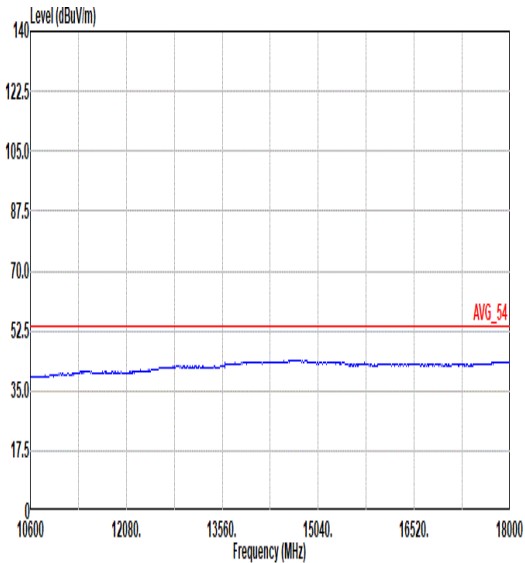


Mode	6	
	Harmonic	
	2400-2483.5_Bluetooth-LE GFSK _CH00_2402MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg.	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL

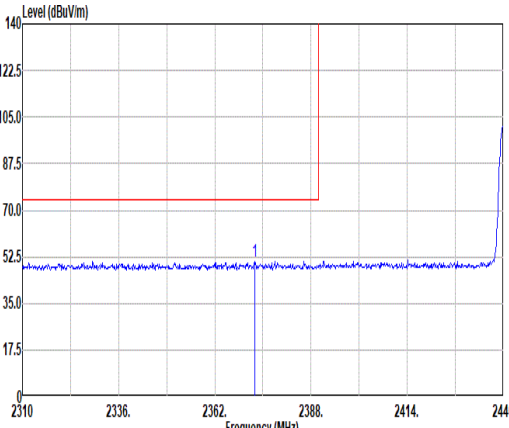
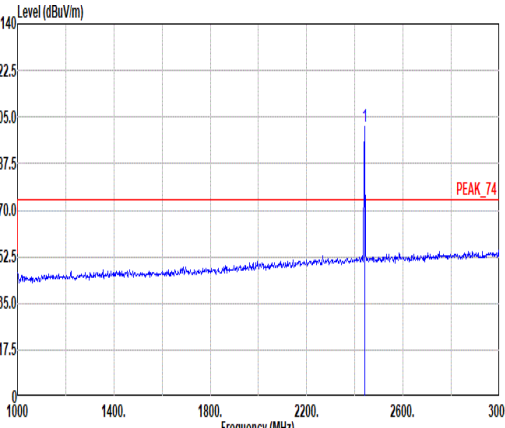
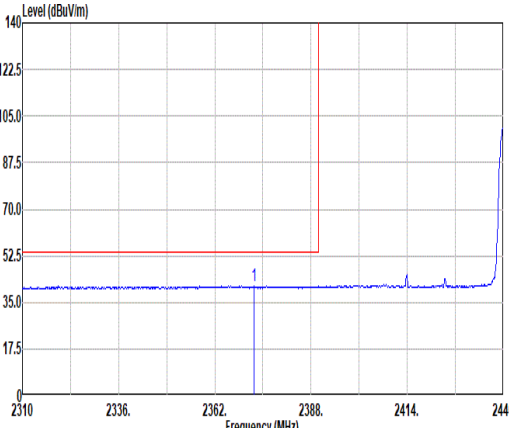
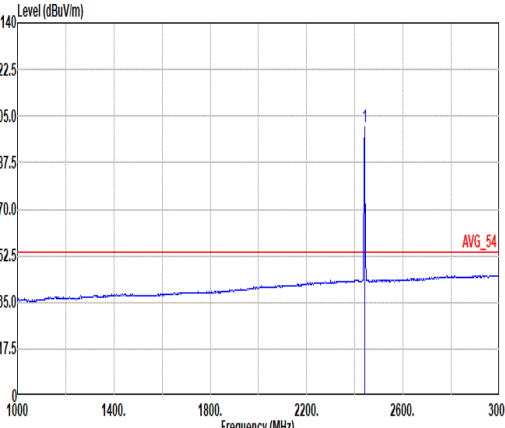


		7																																																						
Mode	Band Edge - L																																																							
	2400-2483.5_Bluetooth-LE GFSK_CH19_2440MHz																																																							
ANT	1																																																							
Pol.	Horizontal						Fundamental																																																	
Peak																																																								
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto						Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto																																																	
Avg.																																																								
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto						Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto																																																	
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2372.79</td><td>50.72</td><td>74.00</td><td>-23.28</td><td>37.07</td><td>27.07</td><td>8.41</td><td>32.66</td><td>10.03</td><td>160</td><td>21</td><td>PEAK</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2372.79	50.72	74.00	-23.28	37.07	27.07	8.41	32.66	10.03	160	21	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2372.79	50.72	74.00	-23.28	37.07	27.07	8.41	32.66	10.03	160	21	PEAK																																												
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>101.36</td><td>-----</td><td>-----</td><td>88.60</td><td>26.90</td><td>8.53</td><td>32.70</td><td>10.03</td><td>160</td><td>21</td><td>PEAK</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	101.36	-----	-----	88.60	26.90	8.53	32.70	10.03	160	21	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2440.00	101.36	-----	-----	88.60	26.90	8.53	32.70	10.03	160	21	PEAK																																												
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2372.66</td><td>41.05</td><td>54.00</td><td>-12.95</td><td>28.20</td><td>27.07</td><td>8.41</td><td>32.66</td><td>10.03</td><td>160</td><td>21</td><td>AVERAGE</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2372.66	41.05	54.00	-12.95	28.20	27.07	8.41	32.66	10.03	160	21	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2372.66	41.05	54.00	-12.95	28.20	27.07	8.41	32.66	10.03	160	21	AVERAGE																																												
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>100.83</td><td>-----</td><td>-----</td><td>88.07</td><td>26.90</td><td>8.53</td><td>32.70</td><td>10.03</td><td>160</td><td>21</td><td>AVERAGE</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	100.83	-----	-----	88.07	26.90	8.53	32.70	10.03	160	21	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2440.00	100.83	-----	-----	88.07	26.90	8.53	32.70	10.03	160	21	AVERAGE																																												

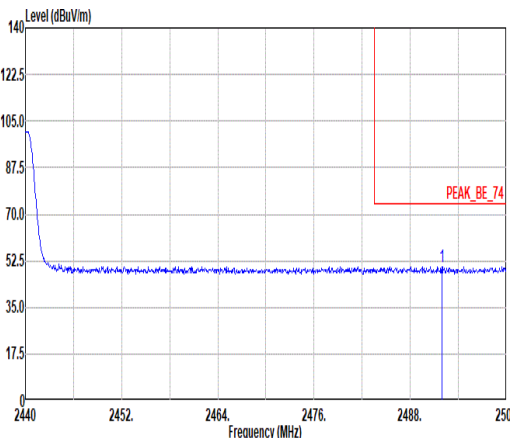
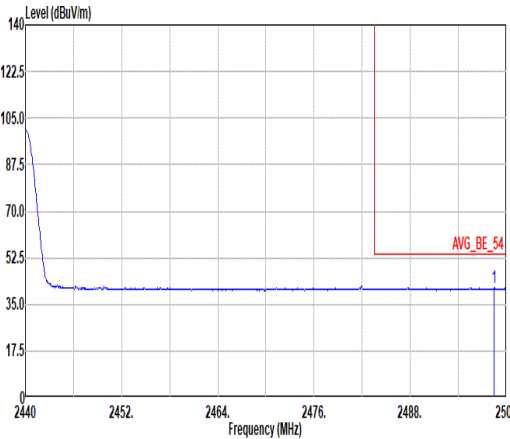


Mode	7																																																							
	Band Edge - R																																																							
	2400-2483.5_Bluetooth-LE GFSK _CH19_2440MHz																																																							
ANT	1																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2491.96</td><td>50.42</td><td>74.00</td><td>-23.58</td><td>37.60</td><td>26.90</td><td>8.63</td><td>32.74</td><td>10.03</td><td>160</td><td>21</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2491.96	50.42	74.00	-23.58	37.60	26.90	8.63	32.74	10.03	160	21	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2491.96	50.42	74.00	-23.58	37.60	26.90	8.63	32.74	10.03	160	21	PEAK																																												
Avg.	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2490.44</td><td>41.13</td><td>54.00</td><td>-12.87</td><td>28.30</td><td>26.90</td><td>8.64</td><td>32.74</td><td>10.03</td><td>160</td><td>21</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2490.44	41.13	54.00	-12.87	28.30	26.90	8.64	32.74	10.03	160	21	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2490.44	41.13	54.00	-12.87	28.30	26.90	8.64	32.74	10.03	160	21	AVERAGE																																												

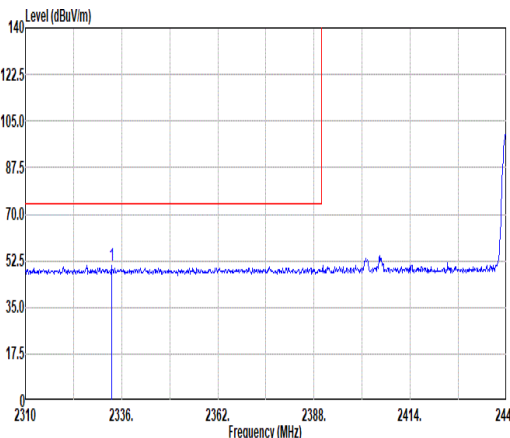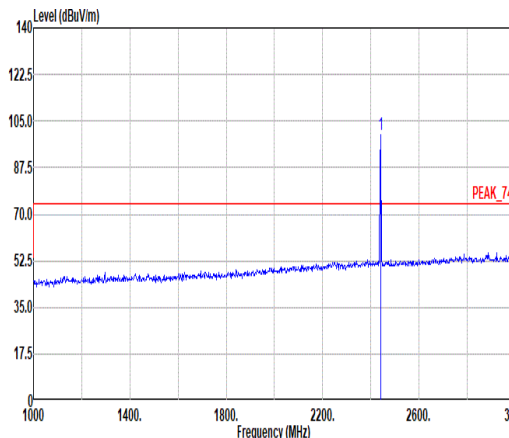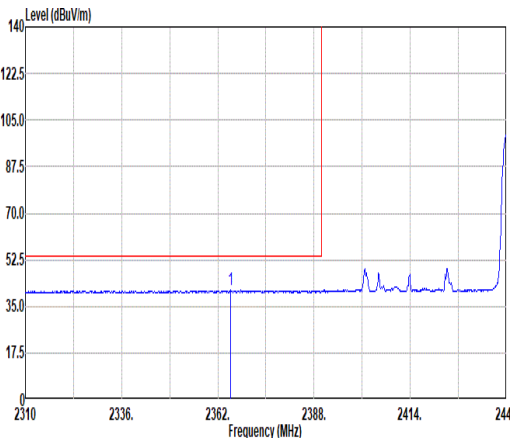
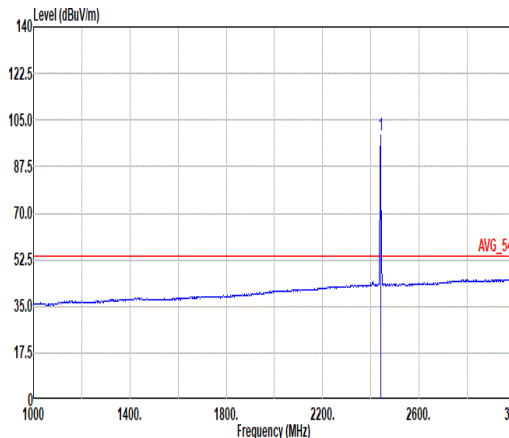


Mode	7																																																																																					
	Band Edge - L																																																																																					
	2400-2483.5_Bluetooth-LE GFSK_CH19_2440MHz																																																																																					
ANT	1																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2333.27</td><td>50.73</td><td>74.00</td><td>-23.27</td><td>37.93</td><td>27.07</td><td>8.34</td><td>32.64</td><td>10.03</td><td>232 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2333.27	50.73	74.00	-23.27	37.93	27.07	8.34	32.64	10.03	232 PEAK	 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>100.08</td><td>-----</td><td>-----</td><td>87.32</td><td>26.90</td><td>8.53</td><td>32.70</td><td>10.03</td><td>232 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	100.08	-----	-----	87.32	26.90	8.53	32.70	10.03	232 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	2333.27	50.73	74.00	-23.27	37.93	27.07	8.34	32.64	10.03	232 PEAK																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	2440.00	100.08	-----	-----	87.32	26.90	8.53	32.70	10.03	232 PEAK																																																																												
Avg.	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2365.30</td><td>41.40</td><td>54.00</td><td>-12.60</td><td>28.53</td><td>27.10</td><td>8.40</td><td>32.66</td><td>10.03</td><td>232 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2365.30	41.40	54.00	-12.60	28.53	27.10	8.40	32.66	10.03	232 AVERAGE	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>99.48</td><td>-----</td><td>-----</td><td>86.72</td><td>26.90</td><td>8.53</td><td>32.70</td><td>10.03</td><td>232 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	99.48	-----	-----	86.72	26.90	8.53	32.70	10.03	232 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	2365.30	41.40	54.00	-12.60	28.53	27.10	8.40	32.66	10.03	232 AVERAGE																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	2440.00	99.48	-----	-----	86.72	26.90	8.53	32.70	10.03	232 AVERAGE																																																																												

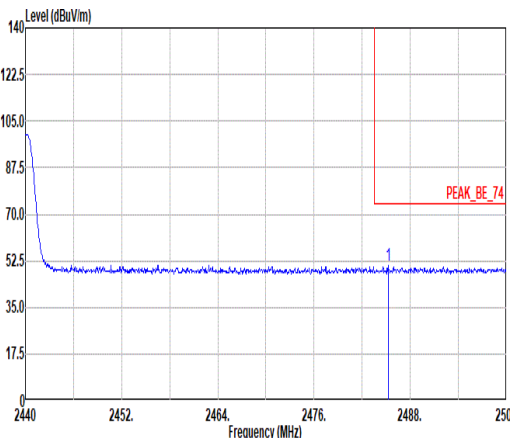
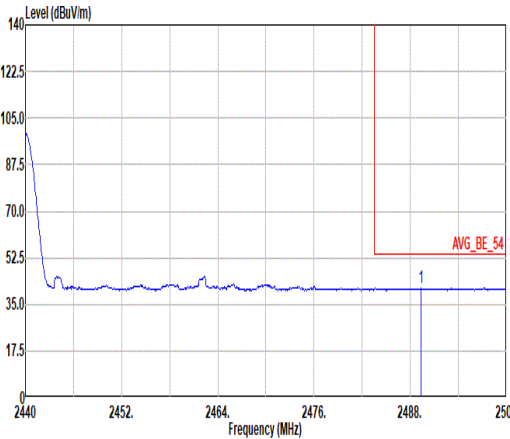


Mode	7																																									
	Band Edge - R																																									
	2400-2483.5_Bluetooth-LE GFSK _CH19_2440MHz																																									
ANT	1																																									
Pol.	Vertical	Fundamental																																								
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2485.24</td><td>50.93</td><td>74.00</td><td>-23.07</td><td>38.12</td><td>26.90</td><td>8.61</td><td>32.73</td><td>10.03</td><td>395</td><td>232 PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2485.24	50.93	74.00	-23.07	38.12	26.90	8.61	32.73	10.03	395	232 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																
1 2485.24	50.93	74.00	-23.07	38.12	26.90	8.61	32.73	10.03	395	232 PEAK																																
Avg.	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2489.38</td><td>41.24</td><td>54.00</td><td>-12.76</td><td>28.42</td><td>26.90</td><td>8.62</td><td>32.73</td><td>10.03</td><td>395</td><td>232 AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2489.38	41.24	54.00	-12.76	28.42	26.90	8.62	32.73	10.03	395	232 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																
1 2489.38	41.24	54.00	-12.76	28.42	26.90	8.62	32.73	10.03	395	232 AVERAGE																																



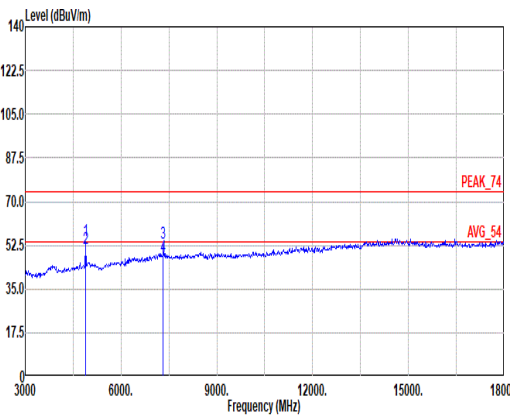
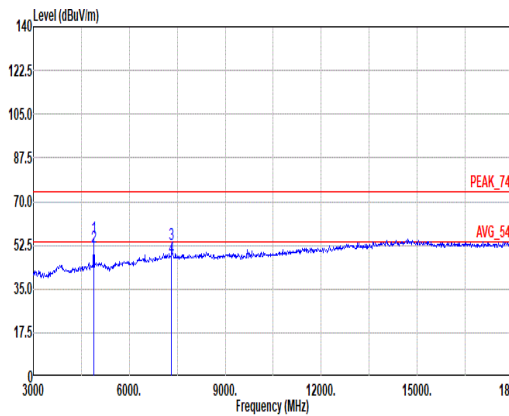


Mode	7																																																																																																																																																																																
	Harmonic																																																																																																																																																																																
	2400-2483.5_Bluetooth-LE GFSK _CH19_2440MHz																																																																																																																																																																																
ANT	1																																																																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																																																																										
Peak Avg.																																																																																																																																																																																	
	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>54.49</td><td>74.00</td><td>-19.51</td><td>43.16</td><td>32.56</td><td>12.26</td><td>33.97</td><td>0.48</td><td>104</td><td>357</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>51.18</td><td>54.00</td><td>-2.82</td><td>39.85</td><td>32.56</td><td>12.26</td><td>33.97</td><td>0.48</td><td>104</td><td>357</td><td>AVERAGE</td></tr><tr><td>3</td><td>7320.00</td><td>53.62</td><td>74.00</td><td>-20.38</td><td>37.48</td><td>37.00</td><td>15.12</td><td>36.42</td><td>0.44</td><td>107</td><td>60</td><td>PEAK</td></tr><tr><td>4</td><td>7320.00</td><td>47.97</td><td>54.00</td><td>-6.03</td><td>31.83</td><td>37.00</td><td>15.12</td><td>36.42</td><td>0.44</td><td>107</td><td>60</td><td>AVERAGE</td></tr></table> Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>55.48</td><td>74.00</td><td>-18.52</td><td>44.15</td><td>32.56</td><td>12.26</td><td>33.97</td><td>0.48</td><td>379</td><td>215</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>51.92</td><td>54.00</td><td>-2.08</td><td>40.59</td><td>32.56</td><td>12.26</td><td>33.97</td><td>0.48</td><td>379</td><td>215</td><td>AVERAGE</td></tr><tr><td>3</td><td>7320.00</td><td>52.95</td><td>74.00</td><td>-21.05</td><td>36.81</td><td>37.00</td><td>15.12</td><td>36.42</td><td>0.44</td><td>304</td><td>212</td><td>PEAK</td></tr><tr><td>4</td><td>7320.00</td><td>47.41</td><td>54.00</td><td>-6.59</td><td>31.27</td><td>37.00</td><td>15.12</td><td>36.42</td><td>0.44</td><td>304</td><td>212</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	54.49	74.00	-19.51	43.16	32.56	12.26	33.97	0.48	104	357	PEAK	2	4880.00	51.18	54.00	-2.82	39.85	32.56	12.26	33.97	0.48	104	357	AVERAGE	3	7320.00	53.62	74.00	-20.38	37.48	37.00	15.12	36.42	0.44	107	60	PEAK	4	7320.00	47.97	54.00	-6.03	31.83	37.00	15.12	36.42	0.44	107	60	AVERAGE		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	55.48	74.00	-18.52	44.15	32.56	12.26	33.97	0.48	379	215	PEAK	2	4880.00	51.92	54.00	-2.08	40.59	32.56	12.26	33.97	0.48	379	215	AVERAGE	3	7320.00	52.95	74.00	-21.05	36.81	37.00	15.12	36.42	0.44	304	212	PEAK	4	7320.00	47.41	54.00	-6.59	31.27	37.00	15.12	36.42	0.44	304	212
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																							
1	4880.00	54.49	74.00	-19.51	43.16	32.56	12.26	33.97	0.48	104	357	PEAK																																																																																																																																																																					
2	4880.00	51.18	54.00	-2.82	39.85	32.56	12.26	33.97	0.48	104	357	AVERAGE																																																																																																																																																																					
3	7320.00	53.62	74.00	-20.38	37.48	37.00	15.12	36.42	0.44	107	60	PEAK																																																																																																																																																																					
4	7320.00	47.97	54.00	-6.03	31.83	37.00	15.12	36.42	0.44	107	60	AVERAGE																																																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																							
1	4880.00	55.48	74.00	-18.52	44.15	32.56	12.26	33.97	0.48	379	215	PEAK																																																																																																																																																																					
2	4880.00	51.92	54.00	-2.08	40.59	32.56	12.26	33.97	0.48	379	215	AVERAGE																																																																																																																																																																					
3	7320.00	52.95	74.00	-21.05	36.81	37.00	15.12	36.42	0.44	304	212	PEAK																																																																																																																																																																					
4	7320.00	47.41	54.00	-6.59	31.27	37.00	15.12	36.42	0.44	304	212	AVERAGE																																																																																																																																																																					



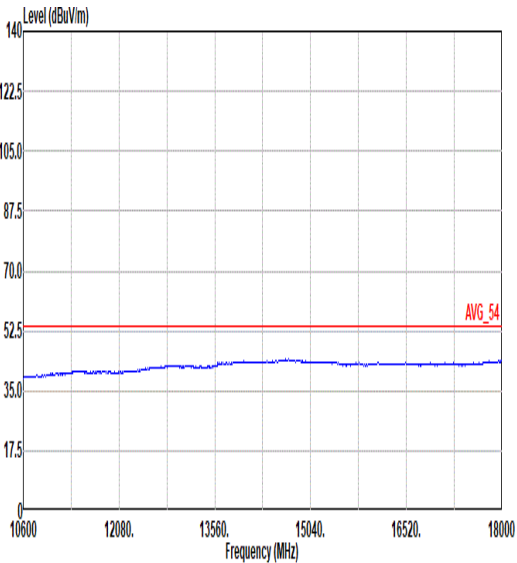
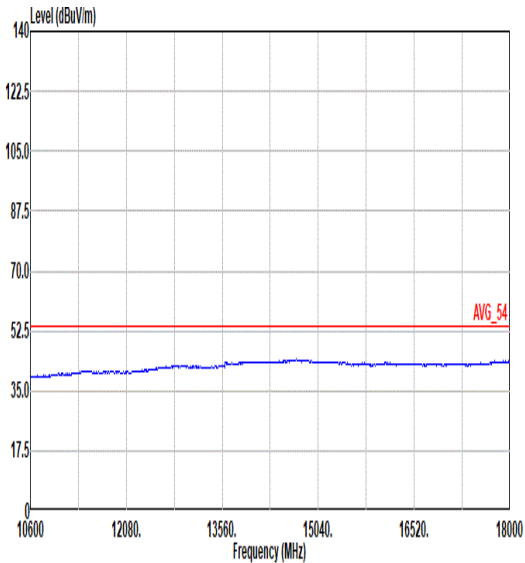


Mode	7	
	Harmonic	
	2400-2483.5_Bluetooth-LE GFSK _CH19_2440MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg.	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL

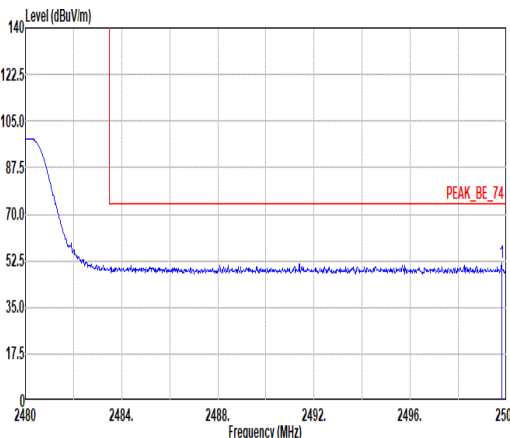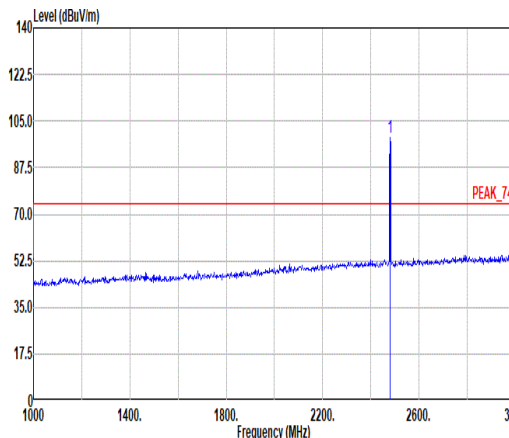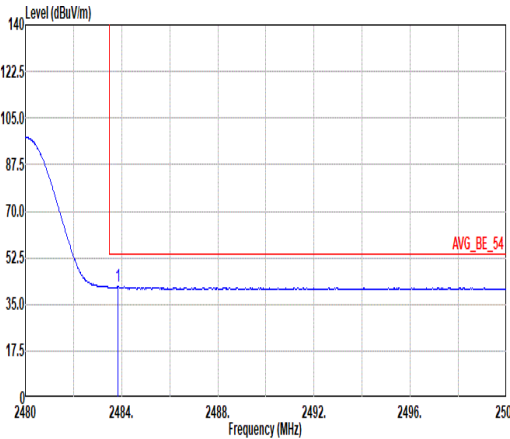
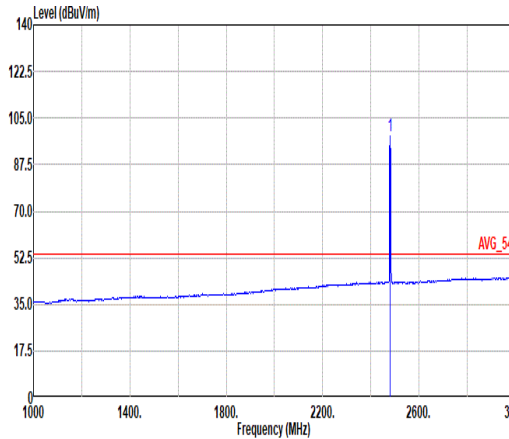


Mode	8																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Bluetooth-LE GFSK_CH39_2480MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2499.80</td><td>51.80</td><td>74.00</td><td>-22.20</td><td>38.97</td><td>26.90</td><td>8.64</td><td>32.74</td><td>10.03</td><td>162</td><td>20</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2499.80	51.80	74.00	-22.20	38.97	26.90	8.64	32.74	10.03	162	20	PEAK	 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>98.81</td><td>-----</td><td>-----</td><td>86.01</td><td>26.90</td><td>8.60</td><td>32.73</td><td>10.03</td><td>162</td><td>20</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	98.81	-----	-----	86.01	26.90	8.60	32.73	10.03	162	20	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2499.80	51.80	74.00	-22.20	38.97	26.90	8.64	32.74	10.03	162	20	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2480.00	98.81	-----	-----	86.01	26.90	8.60	32.73	10.03	162	20	PEAK																																																																																								
Avg.	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.86</td><td>41.60</td><td>54.00</td><td>-12.40</td><td>28.79</td><td>26.90</td><td>8.61</td><td>32.73</td><td>10.03</td><td>162</td><td>20</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.86	41.60	54.00	-12.40	28.79	26.90	8.61	32.73	10.03	162	20	AVERAGE	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>98.19</td><td>-----</td><td>-----</td><td>85.39</td><td>26.90</td><td>8.60</td><td>32.73</td><td>10.03</td><td>162</td><td>20</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	98.19	-----	-----	85.39	26.90	8.60	32.73	10.03	162	20	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.86	41.60	54.00	-12.40	28.79	26.90	8.61	32.73	10.03	162	20	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2480.00	98.19	-----	-----	85.39	26.90	8.60	32.73	10.03	162	20	AVERAGE																																																																																								

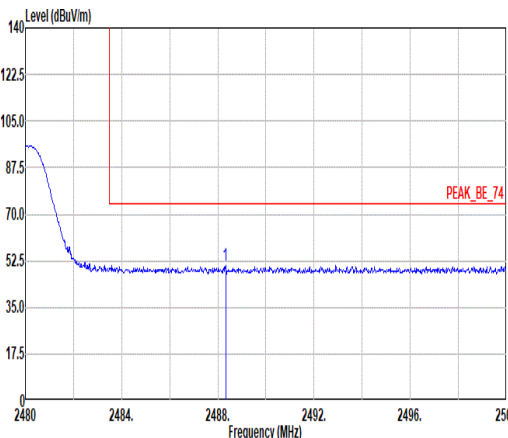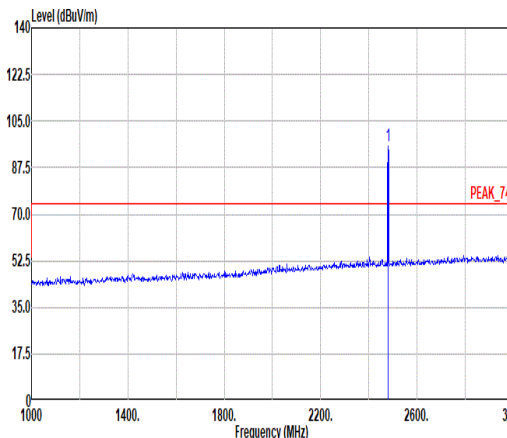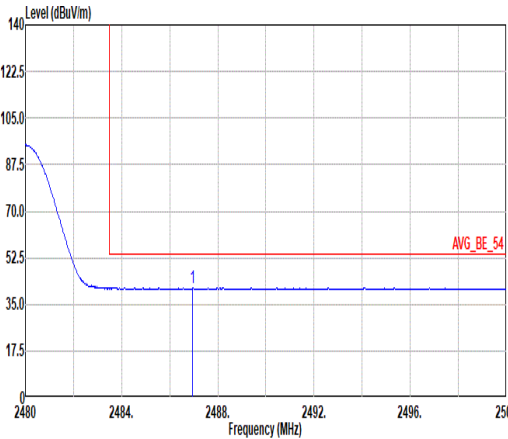
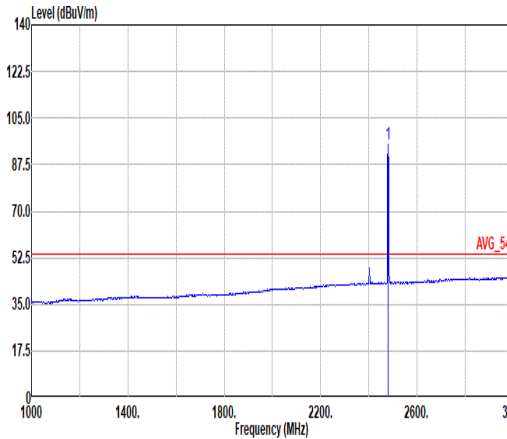


Mode	8																																																																																					
	Band Edge																																																																																					
	2400-2483.5_Bluetooth-LE GFSK_CH39_2480MHz																																																																																					
ANT	1																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2488.32</td><td>50.86</td><td>74.00</td><td>-23.14</td><td>38.04</td><td>26.90</td><td>8.62</td><td>32.73</td><td>10.03</td><td>338</td><td>247 PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2488.32	50.86	74.00	-23.14	38.04	26.90	8.62	32.73	10.03	338	247 PEAK	 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2480.00</td><td>95.81</td><td>-----</td><td>-----</td><td>83.01</td><td>26.90</td><td>8.60</td><td>32.73</td><td>10.03</td><td>338</td><td>247 PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2480.00	95.81	-----	-----	83.01	26.90	8.60	32.73	10.03	338	247 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1 2488.32	50.86	74.00	-23.14	38.04	26.90	8.62	32.73	10.03	338	247 PEAK																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1 2480.00	95.81	-----	-----	83.01	26.90	8.60	32.73	10.03	338	247 PEAK																																																																												
Avg.	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2486.96</td><td>41.29</td><td>54.00</td><td>-12.71</td><td>28.47</td><td>26.90</td><td>8.62</td><td>32.73</td><td>10.03</td><td>338</td><td>247 AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2486.96	41.29	54.00	-12.71	28.47	26.90	8.62	32.73	10.03	338	247 AVERAGE	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2480.00</td><td>95.04</td><td>-----</td><td>-----</td><td>82.24</td><td>26.90</td><td>8.60</td><td>32.73</td><td>10.03</td><td>338</td><td>247 AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2480.00	95.04	-----	-----	82.24	26.90	8.60	32.73	10.03	338	247 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1 2486.96	41.29	54.00	-12.71	28.47	26.90	8.62	32.73	10.03	338	247 AVERAGE																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1 2480.00	95.04	-----	-----	82.24	26.90	8.60	32.73	10.03	338	247 AVERAGE																																																																												

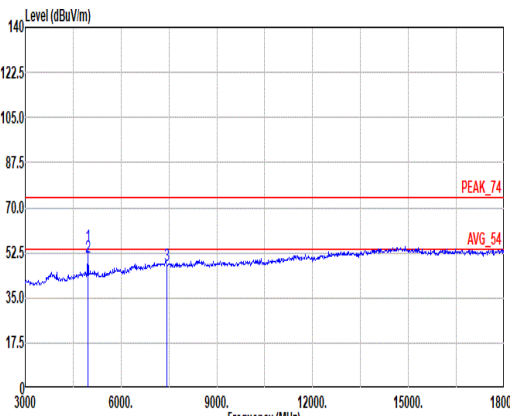
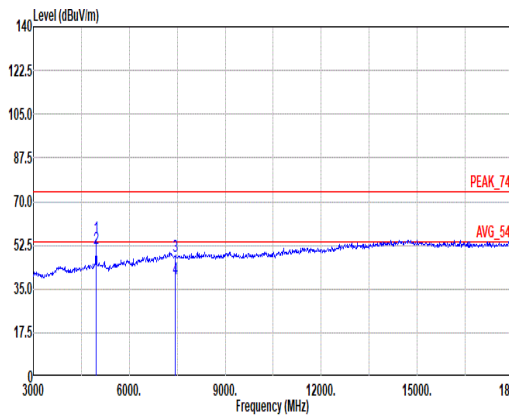


Mode	8																																																																																									
	Harmonic																																																																																									
	2400-2483.5_Bluetooth-LE GFSK _CH39_2480MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Vertical																																																																																			
Peak Avg.																																																																																										
	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL						Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL																																																																																			
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4960.00</td><td>54.69</td><td>74.00</td><td>-19.31</td><td>43.27</td><td>32.70</td><td>12.26</td><td>33.97</td><td>0.43</td><td>117</td><td>147</td><td>PEAK</td></tr><tr><td>2 4960.00</td><td>50.64</td><td>54.00</td><td>-3.36</td><td>39.22</td><td>32.70</td><td>12.26</td><td>33.97</td><td>0.43</td><td>117</td><td>147</td><td>AVERAGE</td></tr><tr><td>3 7440.00</td><td>47.81</td><td>74.00</td><td>-26.19</td><td>31.74</td><td>36.90</td><td>15.25</td><td>36.49</td><td>0.41</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 4960.00	54.69	74.00	-19.31	43.27	32.70	12.26	33.97	0.43	117	147	PEAK	2 4960.00	50.64	54.00	-3.36	39.22	32.70	12.26	33.97	0.43	117	147	AVERAGE	3 7440.00	47.81	74.00	-26.19	31.74	36.90	15.25	36.49	0.41	--	--	PEAK												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 4960.00	54.69	74.00	-19.31	43.27	32.70	12.26	33.97	0.43	117	147	PEAK																																																																															
2 4960.00	50.64	54.00	-3.36	39.22	32.70	12.26	33.97	0.43	117	147	AVERAGE																																																																															
3 7440.00	47.81	74.00	-26.19	31.74	36.90	15.25	36.49	0.41	--	--	PEAK																																																																															
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4960.00</td><td>55.31</td><td>74.00</td><td>-18.69</td><td>43.89</td><td>32.70</td><td>12.26</td><td>33.97</td><td>0.43</td><td>344</td><td>217</td><td>PEAK</td></tr><tr><td>2 4960.00</td><td>51.26</td><td>54.00</td><td>-2.74</td><td>39.84</td><td>32.70</td><td>12.26</td><td>33.97</td><td>0.43</td><td>344</td><td>217</td><td>AVERAGE</td></tr><tr><td>3 7440.00</td><td>48.32</td><td>74.00</td><td>-25.68</td><td>32.25</td><td>36.90</td><td>15.25</td><td>36.49</td><td>0.41</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>4 7440.00</td><td>38.97</td><td>54.00</td><td>-15.03</td><td>22.90</td><td>36.90</td><td>15.25</td><td>36.49</td><td>0.41</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 4960.00	55.31	74.00	-18.69	43.89	32.70	12.26	33.97	0.43	344	217	PEAK	2 4960.00	51.26	54.00	-2.74	39.84	32.70	12.26	33.97	0.43	344	217	AVERAGE	3 7440.00	48.32	74.00	-25.68	32.25	36.90	15.25	36.49	0.41	--	--	PEAK	4 7440.00	38.97	54.00	-15.03	22.90	36.90	15.25	36.49	0.41	--	--	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 4960.00	55.31	74.00	-18.69	43.89	32.70	12.26	33.97	0.43	344	217	PEAK																																																																															
2 4960.00	51.26	54.00	-2.74	39.84	32.70	12.26	33.97	0.43	344	217	AVERAGE																																																																															
3 7440.00	48.32	74.00	-25.68	32.25	36.90	15.25	36.49	0.41	--	--	PEAK																																																																															
4 7440.00	38.97	54.00	-15.03	22.90	36.90	15.25	36.49	0.41	--	--	AVERAGE																																																																															

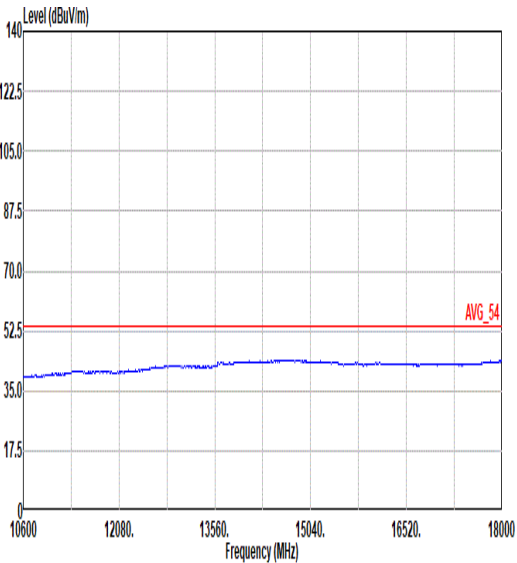
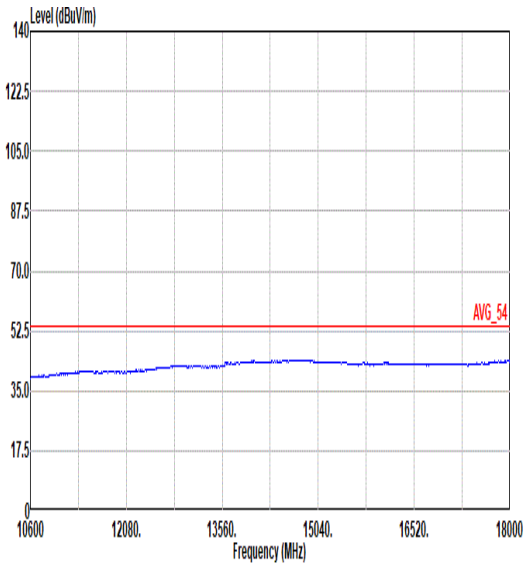


Mode	8	
	Harmonic	
	2400-2483.5_Bluetooth-LE GFSK _CH39_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg.	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL

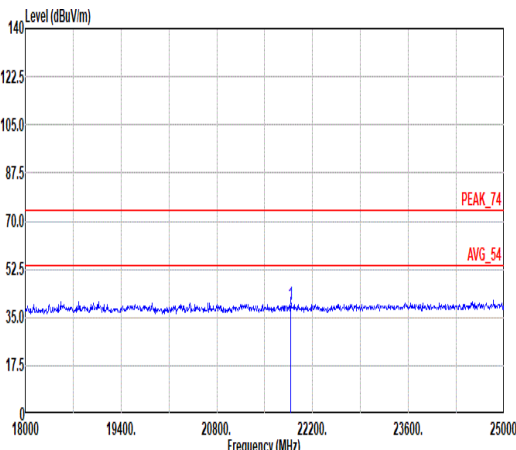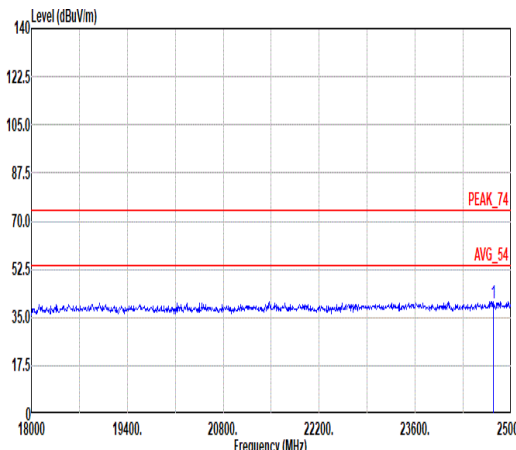

Mode	12																																																																																							
	SHF																																																																																							
	2400-2483.5_Bluetooth-LE GFSK _CH19_2440MHz																																																																																							
ANT	1																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak	 Site : 03CH21-HY Condition: PEAK_74 1m 88HA9170_1223_230710 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>21873.87</td><td>39.56</td><td>74.00</td><td>-34.44</td><td>44.92</td><td>38.25</td><td>26.76</td><td>60.83</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	21873.87	39.56	74.00	-34.44	44.92	38.25	26.76	60.83	-9.54	--	PEAK	 Site : 03CH21-HY Condition: PEAK_74 1m 88HA9170_1223_230710 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24735.29</td><td>40.23</td><td>74.00</td><td>-33.77</td><td>42.04</td><td>39.33</td><td>28.75</td><td>60.35</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24735.29	40.23	74.00	-33.77	42.04	39.33	28.75	60.35	-9.54	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	21873.87	39.56	74.00	-34.44	44.92	38.25	26.76	60.83	-9.54	--	PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	24735.29	40.23	74.00	-33.77	42.04	39.33	28.75	60.35	-9.54	--	PEAK																																																																													

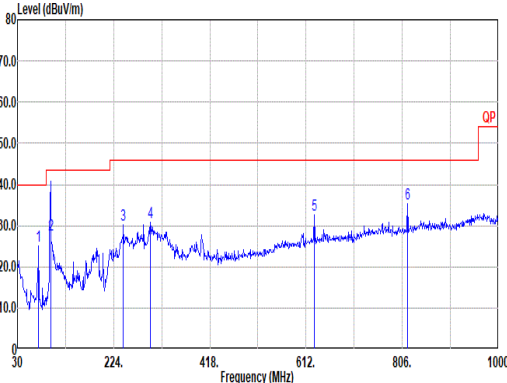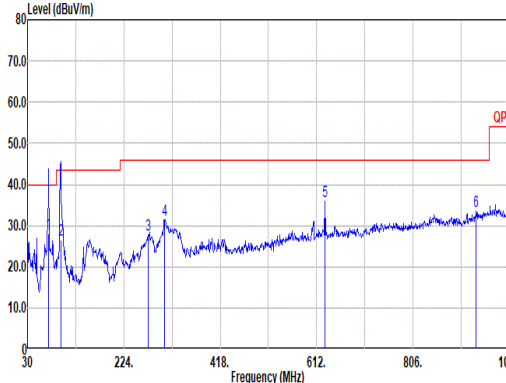

Mode	13																																																																																																																													
	LF																																																																																																																													
	2400-2483.5_Bluetooth-LE GFSK _CH19_2440MHz																																																																																																																													
ANT	1																																																																																																																													
Pol.	Horizontal							Vertical																																																																																																																						
QP/ Peak																																																																																																																														
	Site : 03CH21-HY Condition: QP 3m LF_633038001_231015 HORIZONTAL																																																																																																																													
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>72.68</td><td>25.11</td><td>40.00</td><td>-14.89</td><td>43.46</td><td>12.88</td><td>1.44</td><td>32.72</td><td>0.05</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>96.93</td><td>27.00</td><td>43.50</td><td>-15.70</td><td>42.88</td><td>15.06</td><td>1.69</td><td>32.69</td><td>0.06</td><td>100</td><td>283</td><td>QP</td><td></td></tr><tr><td>3</td><td>243.40</td><td>30.24</td><td>46.00</td><td>-15.76</td><td>42.62</td><td>17.58</td><td>2.67</td><td>32.74</td><td>0.11</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>298.69</td><td>30.78</td><td>46.00</td><td>-15.22</td><td>41.36</td><td>19.18</td><td>2.96</td><td>32.78</td><td>0.06</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>628.49</td><td>32.75</td><td>46.00</td><td>-13.25</td><td>35.05</td><td>26.31</td><td>4.30</td><td>33.02</td><td>0.11</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>816.67</td><td>35.21</td><td>46.00</td><td>-10.79</td><td>34.61</td><td>28.17</td><td>4.88</td><td>32.63</td><td>0.18</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>															Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	72.68	25.11	40.00	-14.89	43.46	12.88	1.44	32.72	0.05	--	--	--	Peak	2	96.93	27.00	43.50	-15.70	42.88	15.06	1.69	32.69	0.06	100	283	QP		3	243.40	30.24	46.00	-15.76	42.62	17.58	2.67	32.74	0.11	--	--	--	Peak	4	298.69	30.78	46.00	-15.22	41.36	19.18	2.96	32.78	0.06	--	--	--	Peak	5	628.49	32.75	46.00	-13.25	35.05	26.31	4.30	33.02	0.11	--	--	--	Peak	6	816.67	35.21	46.00	-10.79	34.61	28.17	4.88	32.63	0.18	--	--	--	Peak
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																	
1	72.68	25.11	40.00	-14.89	43.46	12.88	1.44	32.72	0.05	--	--	--	Peak																																																																																																																	
2	96.93	27.00	43.50	-15.70	42.88	15.06	1.69	32.69	0.06	100	283	QP																																																																																																																		
3	243.40	30.24	46.00	-15.76	42.62	17.58	2.67	32.74	0.11	--	--	--	Peak																																																																																																																	
4	298.69	30.78	46.00	-15.22	41.36	19.18	2.96	32.78	0.06	--	--	--	Peak																																																																																																																	
5	628.49	32.75	46.00	-13.25	35.05	26.31	4.30	33.02	0.11	--	--	--	Peak																																																																																																																	
6	816.67	35.21	46.00	-10.79	34.61	28.17	4.88	32.63	0.18	--	--	--	Peak																																																																																																																	
QP/ Peak	Site : 03CH21-HY Condition: QP 3m LF_633038001_231015 VERTICAL																																																																																																																													
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>72.68</td><td>28.13</td><td>40.00</td><td>-11.87</td><td>46.48</td><td>12.88</td><td>1.44</td><td>32.72</td><td>0.05</td><td>100</td><td>20</td><td>QP</td><td></td></tr><tr><td>2</td><td>96.93</td><td>26.47</td><td>43.50</td><td>-17.03</td><td>41.55</td><td>15.06</td><td>1.69</td><td>32.69</td><td>0.06</td><td>100</td><td>44</td><td>QP</td><td></td></tr><tr><td>3</td><td>272.50</td><td>27.69</td><td>46.00</td><td>-18.31</td><td>38.67</td><td>18.86</td><td>2.83</td><td>32.76</td><td>0.09</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>306.45</td><td>31.54</td><td>46.00</td><td>-14.46</td><td>41.94</td><td>19.31</td><td>3.00</td><td>32.78</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>628.49</td><td>35.80</td><td>46.00</td><td>-10.20</td><td>38.10</td><td>26.31</td><td>4.30</td><td>33.02</td><td>0.11</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>933.07</td><td>33.39</td><td>46.00</td><td>-12.61</td><td>29.60</td><td>30.18</td><td>5.22</td><td>31.80</td><td>0.19</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>															Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	72.68	28.13	40.00	-11.87	46.48	12.88	1.44	32.72	0.05	100	20	QP		2	96.93	26.47	43.50	-17.03	41.55	15.06	1.69	32.69	0.06	100	44	QP		3	272.50	27.69	46.00	-18.31	38.67	18.86	2.83	32.76	0.09	--	--	--	Peak	4	306.45	31.54	46.00	-14.46	41.94	19.31	3.00	32.78	0.07	--	--	--	Peak	5	628.49	35.80	46.00	-10.20	38.10	26.31	4.30	33.02	0.11	--	--	--	Peak	6	933.07	33.39	46.00	-12.61	29.60	30.18	5.22	31.80	0.19	--	--	--	Peak
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																	
1	72.68	28.13	40.00	-11.87	46.48	12.88	1.44	32.72	0.05	100	20	QP																																																																																																																		
2	96.93	26.47	43.50	-17.03	41.55	15.06	1.69	32.69	0.06	100	44	QP																																																																																																																		
3	272.50	27.69	46.00	-18.31	38.67	18.86	2.83	32.76	0.09	--	--	--	Peak																																																																																																																	
4	306.45	31.54	46.00	-14.46	41.94	19.31	3.00	32.78	0.07	--	--	--	Peak																																																																																																																	
5	628.49	35.80	46.00	-10.20	38.10	26.31	4.30	33.02	0.11	--	--	--	Peak																																																																																																																	
6	933.07	33.39	46.00	-12.61	29.60	30.18	5.22	31.80	0.19	--	--	--	Peak																																																																																																																	



<2Mbps>





C1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 9	2400-2483.5	1	Bluetooth-LE GFSK	00	2402	2Mbps	-	-
Mode 10	2400-2483.5	1	Bluetooth-LE GFSK	19	2440	2Mbps	-	-
Mode 11	2400-2483.5	1	Bluetooth-LE GFSK	39	2480	2Mbps	-	-





C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
9	Bluetooth-LE GFSK	00	2385.44	43.56	54.00	-10.44	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE GFSK	00	4804.00	49.59	54.00	-4.41	H	Avg.	Pass	-	Harmonic
10	Bluetooth-LE GFSK	19	2359.40	42.18	54.00	-11.82	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE GFSK	19	4880.00	50.87	54.00	-3.13	V	Avg.	Pass	-	Harmonic
11	Bluetooth-LE GFSK	39	2483.52	43.48	54.00	-10.52	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE GFSK	39	4960.00	49.77	54.00	-4.23	H	Avg.	Pass	-	Harmonic

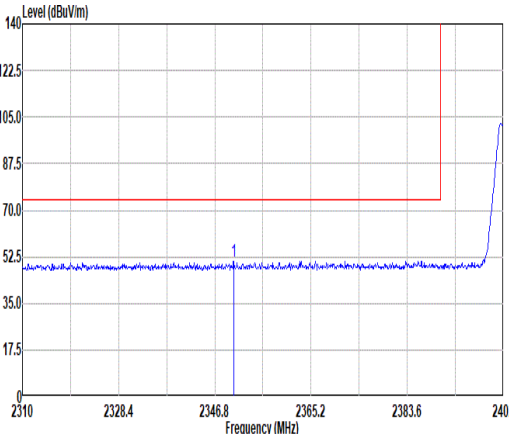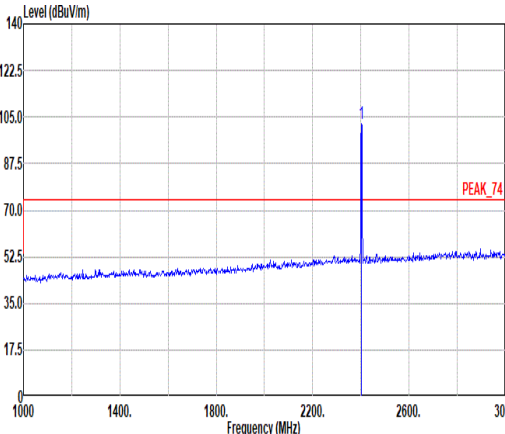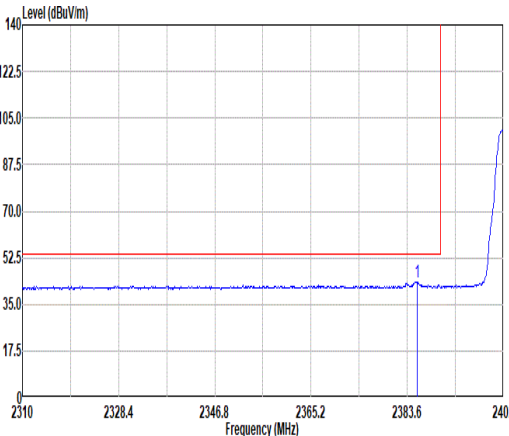
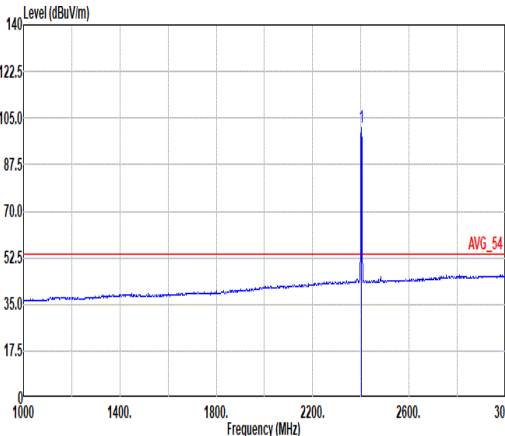


Mode	9																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_Bluetooth-LE GFSK _CH00_2402MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak																																																																																																		
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2350.39</td><td>50.94</td><td>74.00</td><td>-23.06</td><td>38.19</td><td>27.00</td><td>8.37</td><td>32.65</td><td>10.03</td><td>200 16 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	deg	1	2350.39	50.94	74.00	-23.06	38.19	27.00	8.37	32.65	10.03	200 16 PEAK	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>102.74</td><td>-----</td><td>-----</td><td>89.85</td><td>27.08</td><td>8.46</td><td>32.68</td><td>10.03</td><td>200 16 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	deg	1	2402.00	102.74	-----	-----	89.85	27.08	8.46	32.68	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	deg																																																																																								
1	2350.39	50.94	74.00	-23.06	38.19	27.00	8.37	32.65	10.03	200 16 PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	deg																																																																																								
1	2402.00	102.74	-----	-----	89.85	27.08	8.46	32.68	10.03	200 16 PEAK																																																																																								
Avg.																																																																																																		
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:5.600kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2305.44</td><td>43.56</td><td>54.00</td><td>-10.44</td><td>30.77</td><td>27.00</td><td>8.43</td><td>32.67</td><td>10.03</td><td>200 16 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	deg	1	2305.44	43.56	54.00	-10.44	30.77	27.00	8.43	32.67	10.03	200 16 AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:5.600kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>101.47</td><td>-----</td><td>-----</td><td>88.58</td><td>27.08</td><td>8.46</td><td>32.68</td><td>10.03</td><td>200 16 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	deg	1	2402.00	101.47	-----	-----	88.58	27.08	8.46	32.68	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	deg																																																																																								
1	2305.44	43.56	54.00	-10.44	30.77	27.00	8.43	32.67	10.03	200 16 AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	deg																																																																																								
1	2402.00	101.47	-----	-----	88.58	27.08	8.46	32.68	10.03	200 16 AVERAGE																																																																																								

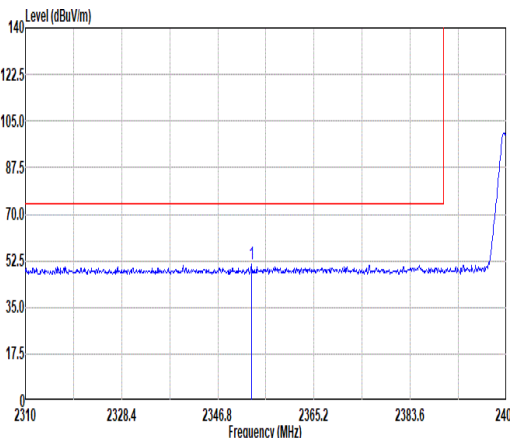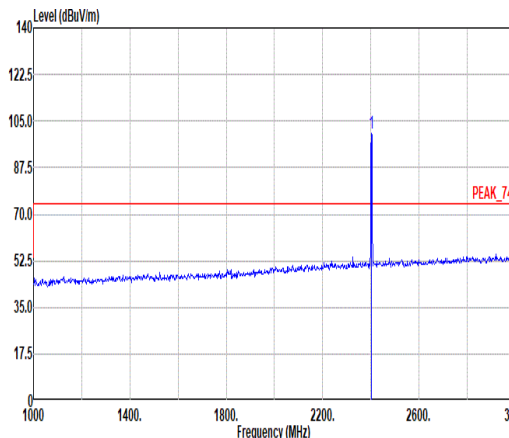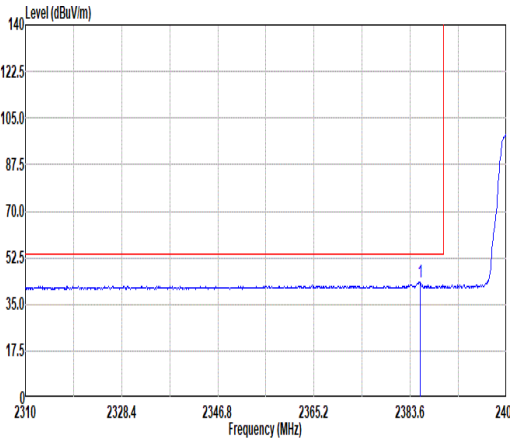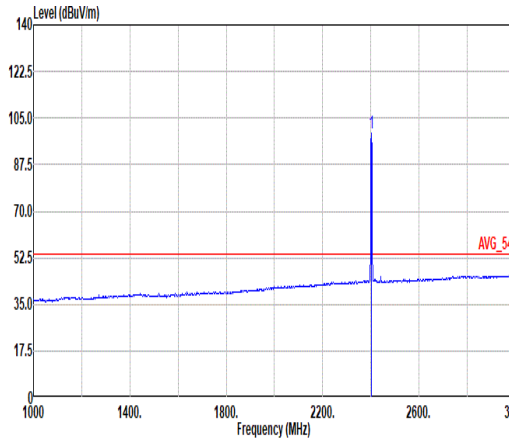



Mode	9																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Bluetooth-LE GFSK_CH00_2402MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2353.24</td><td>51.10</td><td>74.00</td><td>-22.90</td><td>38.32</td><td>27.03</td><td>8.37</td><td>32.65</td><td>10.03</td><td>365</td><td>233</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2353.24	51.10	74.00	-22.90	38.32	27.03	8.37	32.65	10.03	365	233	PEAK	 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>100.63</td><td>-----</td><td>-----</td><td>87.74</td><td>27.08</td><td>8.46</td><td>32.68</td><td>10.03</td><td>365</td><td>233</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	100.63	-----	-----	87.74	27.08	8.46	32.68	10.03	365	233	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2353.24	51.10	74.00	-22.90	38.32	27.03	8.37	32.65	10.03	365	233	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2402.00	100.63	-----	-----	87.74	27.08	8.46	32.68	10.03	365	233	PEAK																																																																																								
Avg.	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:5.600kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2385.44</td><td>43.38</td><td>54.00</td><td>-10.62</td><td>30.59</td><td>27.00</td><td>8.43</td><td>32.67</td><td>10.03</td><td>365</td><td>233</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.44	43.38	54.00	-10.62	30.59	27.00	8.43	32.67	10.03	365	233	AVERAGE	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:5.600kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>99.37</td><td>-----</td><td>-----</td><td>86.48</td><td>27.08</td><td>8.46</td><td>32.68</td><td>10.03</td><td>365</td><td>233</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	99.37	-----	-----	86.48	27.08	8.46	32.68	10.03	365	233	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2385.44	43.38	54.00	-10.62	30.59	27.00	8.43	32.67	10.03	365	233	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2402.00	99.37	-----	-----	86.48	27.08	8.46	32.68	10.03	365	233	AVERAGE																																																																																								

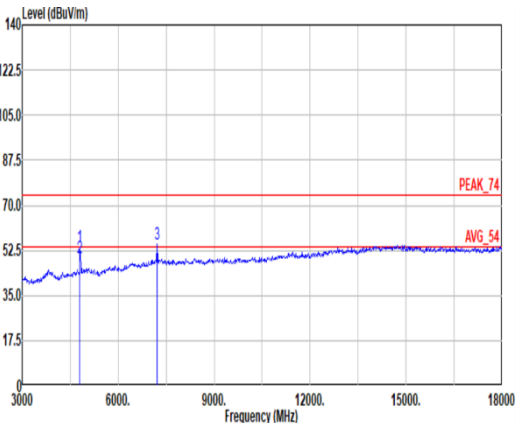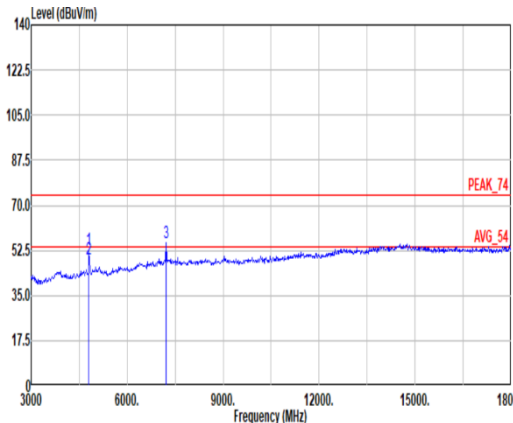





Mode	9																																																																																
	Harmonic																																																																																
	2400-2483.5_Bluetooth-LE GFSK _CH00_2402MHz																																																																																
ANT	1																																																																																
Pol.	Horizontal						Vertical																																																																										
Peak Avg.																																																																																	
	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>53.65</td><td>74.00</td><td>-20.35</td><td>42.52</td><td>32.32</td><td>12.26</td><td>33.98</td><td>0.53</td><td>112</td><td>356</td><td>PEAK</td></tr><tr><td>2</td><td>4804.00</td><td>49.59</td><td>54.00</td><td>-4.41</td><td>38.46</td><td>32.32</td><td>12.26</td><td>33.98</td><td>0.53</td><td>112</td><td>356</td><td>AVERAGE</td></tr><tr><td>3</td><td>7206.00</td><td>54.88</td><td>-----</td><td>-----</td><td>38.96</td><td>36.81</td><td>15.01</td><td>36.36</td><td>0.46</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4804.00	53.65	74.00	-20.35	42.52	32.32	12.26	33.98	0.53	112	356	PEAK	2	4804.00	49.59	54.00	-4.41	38.46	32.32	12.26	33.98	0.53	112	356	AVERAGE	3	7206.00	54.88	-----	-----	38.96	36.81	15.01	36.36	0.46	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1	4804.00	53.65	74.00	-20.35	42.52	32.32	12.26	33.98	0.53	112	356	PEAK																																																																					
2	4804.00	49.59	54.00	-4.41	38.46	32.32	12.26	33.98	0.53	112	356	AVERAGE																																																																					
3	7206.00	54.88	-----	-----	38.96	36.81	15.01	36.36	0.46	--	--	PEAK																																																																					
Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL																																																																																	
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>52.86</td><td>74.00</td><td>-21.14</td><td>41.73</td><td>32.32</td><td>12.26</td><td>33.98</td><td>0.53</td><td>317</td><td>209</td><td>PEAK</td></tr><tr><td>2</td><td>4804.00</td><td>49.14</td><td>54.00</td><td>-4.86</td><td>38.01</td><td>32.32</td><td>12.26</td><td>33.98</td><td>0.53</td><td>317</td><td>209</td><td>AVERAGE</td></tr><tr><td>3</td><td>7206.00</td><td>55.41</td><td>-----</td><td>-----</td><td>39.46</td><td>36.83</td><td>15.02</td><td>36.36</td><td>0.46</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4804.00	52.86	74.00	-21.14	41.73	32.32	12.26	33.98	0.53	317	209	PEAK	2	4804.00	49.14	54.00	-4.86	38.01	32.32	12.26	33.98	0.53	317	209	AVERAGE	3	7206.00	55.41	-----	-----	39.46	36.83	15.02	36.36	0.46	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1	4804.00	52.86	74.00	-21.14	41.73	32.32	12.26	33.98	0.53	317	209	PEAK																																																																					
2	4804.00	49.14	54.00	-4.86	38.01	32.32	12.26	33.98	0.53	317	209	AVERAGE																																																																					
3	7206.00	55.41	-----	-----	39.46	36.83	15.02	36.36	0.46	--	--	PEAK																																																																					

Remark: The unwanted signal #3 can be ignored since it falls within the non-restricted band and meet the requirements of 15.247 (d).

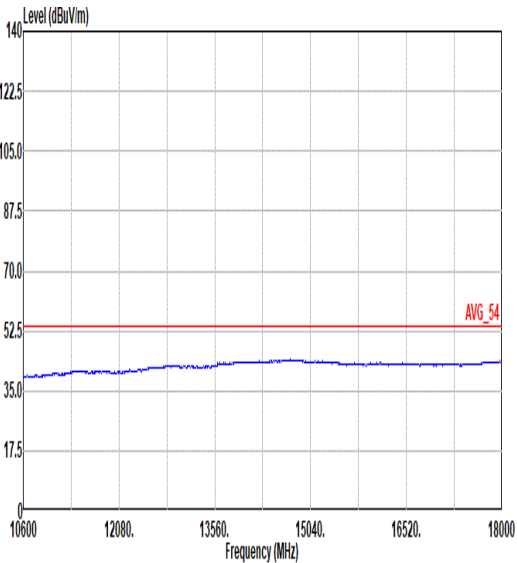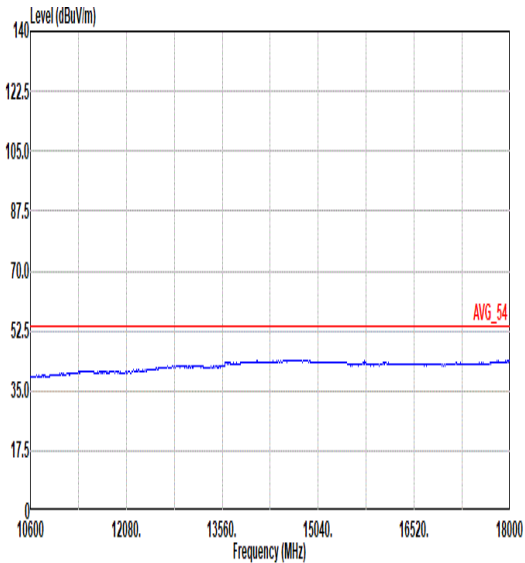

Mode	9	
	Harmonic	
	2400-2483.5_Bluetooth-LE GFSK _CH00_2402MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg.	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL

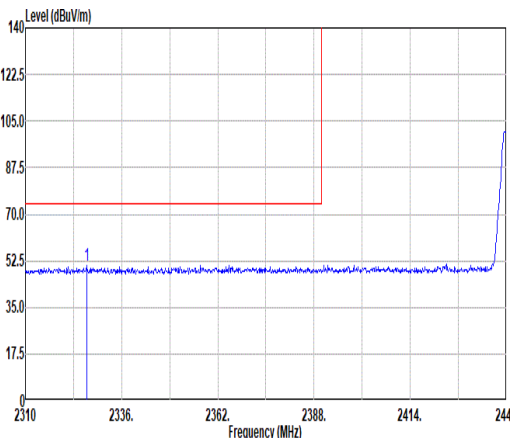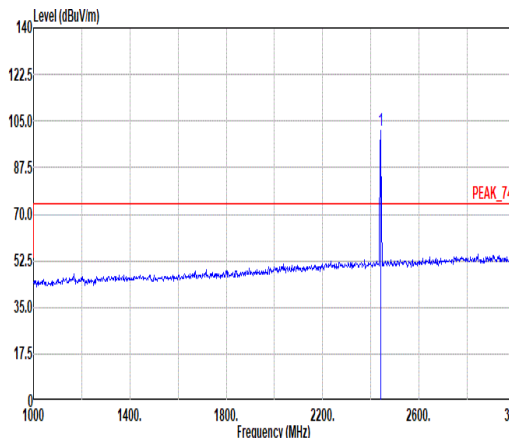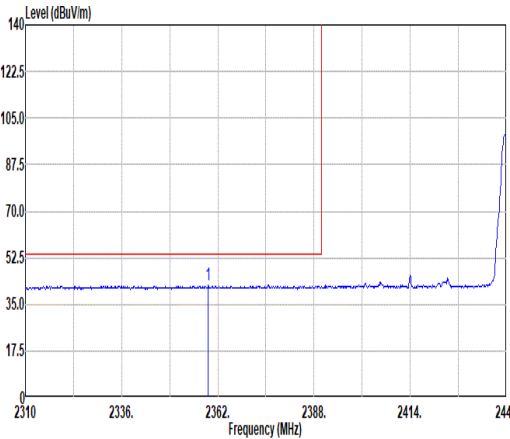
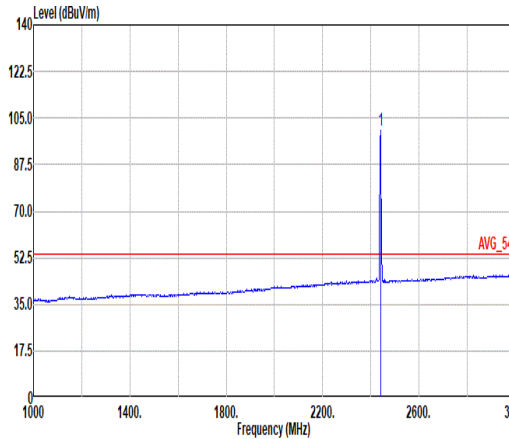


Mode	10																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_Bluetooth-LE GFSK_CH19_2440MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto						Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2326.51</td><td>50.78</td><td>74.00</td><td>-23.22</td><td>37.96</td><td>27.10</td><td>8.32</td><td>32.63</td><td>10.03</td><td>163</td><td>16</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2326.51	50.78	74.00	-23.22	37.96	27.10	8.32	32.63	10.03	163	16	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>101.46</td><td>-----</td><td>-----</td><td>88.70</td><td>26.90</td><td>8.53</td><td>32.70</td><td>10.03</td><td>163</td><td>16</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	101.46	-----	-----	88.70	26.90	8.53	32.70	10.03	163	16
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2326.51	50.78	74.00	-23.22	37.96	27.10	8.32	32.63	10.03	163	16	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	101.46	-----	-----	88.70	26.90	8.53	32.70	10.03	163	16	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:5.600kHz SWT:Auto						Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:5.600kHz SWT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2359.40</td><td>42.18</td><td>54.00</td><td>-11.82</td><td>29.33</td><td>27.09</td><td>8.38</td><td>32.65</td><td>10.03</td><td>163</td><td>16</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2359.40	42.18	54.00	-11.82	29.33	27.09	8.38	32.65	10.03	163	16	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>100.14</td><td>-----</td><td>-----</td><td>87.38</td><td>26.90</td><td>8.53</td><td>32.70</td><td>10.03</td><td>163</td><td>16</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	100.14	-----	-----	87.38	26.90	8.53	32.70	10.03	163	16
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2359.40	42.18	54.00	-11.82	29.33	27.09	8.38	32.65	10.03	163	16	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	100.14	-----	-----	87.38	26.90	8.53	32.70	10.03	163	16	AVERAGE																																																																																							







FCC RADIO TEST REPORT



Report No. :FR452713B

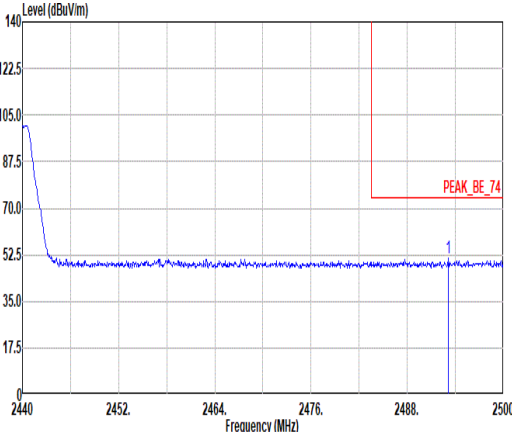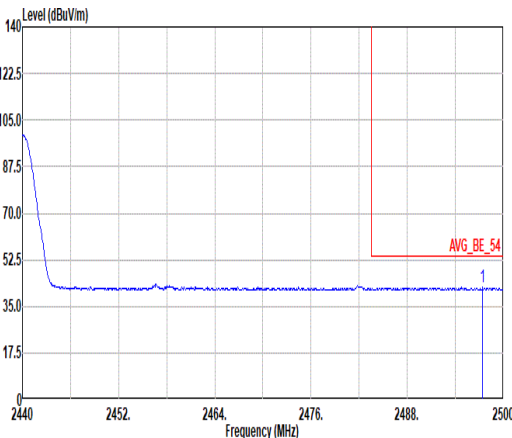Mode	10																																																							
	Band Edge - R																																																							
	2400-2483.5_Bluetooth-LE GFSK _CH19_2440MHz																																																							
ANT	1																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2493.16</td><td>51.04</td><td>74.00</td><td>-22.96</td><td>38.22</td><td>26.90</td><td>8.63</td><td>32.74</td><td>10.03</td><td>163</td><td>16</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2493.16	51.04	74.00	-22.96	38.22	26.90	8.63	32.74	10.03	163	16	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2493.16	51.04	74.00	-22.96	38.22	26.90	8.63	32.74	10.03	163	16	PEAK																																												
Avg.	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:5.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2497.42</td><td>42.09</td><td>54.00</td><td>-11.91</td><td>29.26</td><td>26.90</td><td>8.64</td><td>32.74</td><td>10.03</td><td>163</td><td>16</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2497.42	42.09	54.00	-11.91	29.26	26.90	8.64	32.74	10.03	163	16	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2497.42	42.09	54.00	-11.91	29.26	26.90	8.64	32.74	10.03	163	16	AVERAGE																																												

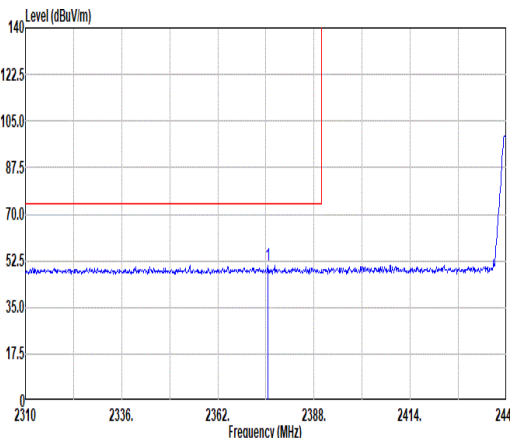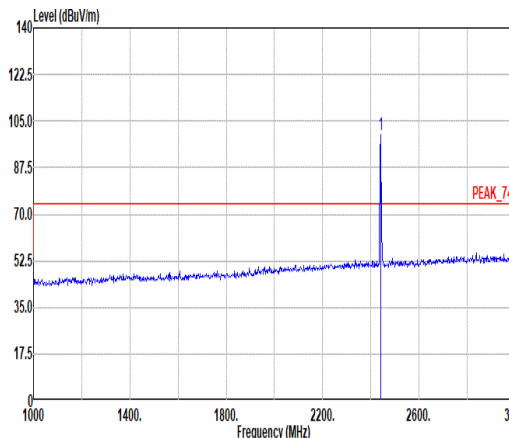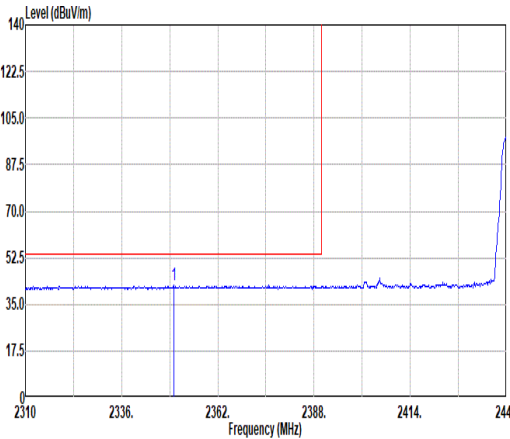
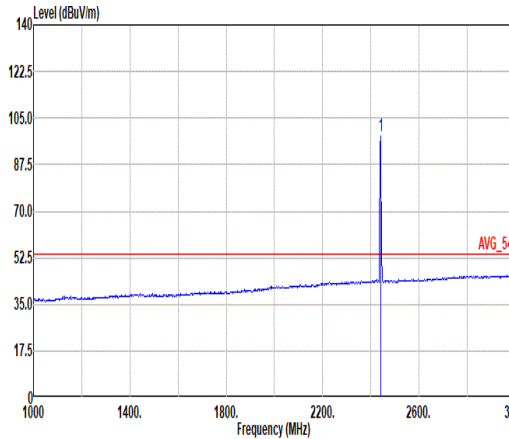


Mode	10																																																																																																																															
	Band Edge - L																																																																																																																															
	2400-2483.5_Bluetooth-LE GFSK_CH19_2440MHz																																																																																																																															
ANT	1																																																																																																																															
Pol.	Vertical	Fundamental																																																																																																																														
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 2375.52</td><td>50.79</td><td>74.00</td><td>-23.21</td><td>37.97</td><td>27.04</td><td>8.41</td><td>32.66</td><td>10.03</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>394</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>235</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2375.52	50.79	74.00	-23.21	37.97	27.04	8.41	32.66	10.03									394									235									PEAK	 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 2440.00</td><td>99.59</td><td>-----</td><td>-----</td><td>86.83</td><td>26.90</td><td>8.53</td><td>32.70</td><td>10.03</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>394</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>235</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2440.00	99.59	-----	-----	86.83	26.90	8.53	32.70	10.03									394									235									PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																								
1 2375.52	50.79	74.00	-23.21	37.97	27.04	8.41	32.66	10.03																																																																																																																								
								394																																																																																																																								
								235																																																																																																																								
								PEAK																																																																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																								
1 2440.00	99.59	-----	-----	86.83	26.90	8.53	32.70	10.03																																																																																																																								
								394																																																																																																																								
								235																																																																																																																								
								PEAK																																																																																																																								
Avg.	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:5.600kHz SWT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 2350.04</td><td>42.10</td><td>54.00</td><td>-11.90</td><td>29.35</td><td>27.00</td><td>8.37</td><td>32.65</td><td>10.03</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>394</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>235</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2350.04	42.10	54.00	-11.90	29.35	27.00	8.37	32.65	10.03									394									235									AVERAGE	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:5.600kHz SWT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 2440.00</td><td>98.32</td><td>-----</td><td>-----</td><td>85.56</td><td>26.90</td><td>8.53</td><td>32.70</td><td>10.03</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>394</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>235</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2440.00	98.32	-----	-----	85.56	26.90	8.53	32.70	10.03									394									235									AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																								
1 2350.04	42.10	54.00	-11.90	29.35	27.00	8.37	32.65	10.03																																																																																																																								
								394																																																																																																																								
								235																																																																																																																								
								AVERAGE																																																																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																								
1 2440.00	98.32	-----	-----	85.56	26.90	8.53	32.70	10.03																																																																																																																								
								394																																																																																																																								
								235																																																																																																																								
								AVERAGE																																																																																																																								

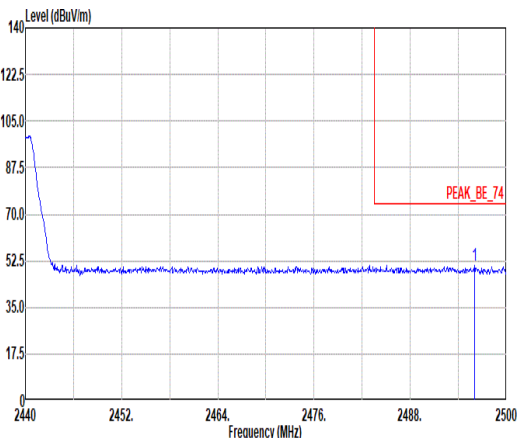
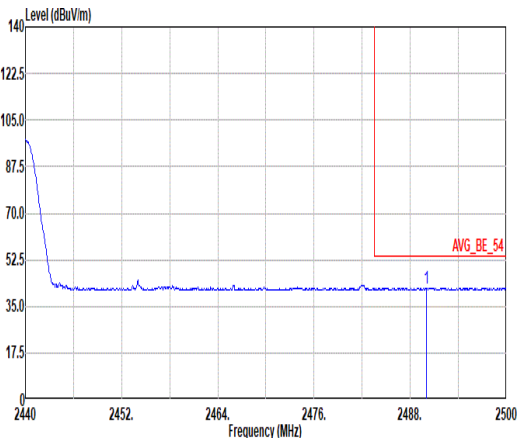


Mode	10																																													
	Band Edge - R																																													
	2400-2483.5_Bluetooth-LE GFSK _CH19_2440MHz																																													
ANT	1																																													
Pol.	Vertical	Fundamental																																												
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2496.04</td><td>50.71</td><td>74.00</td><td>-23.29</td><td>37.89</td><td>26.90</td><td>8.63</td><td>32.74</td><td>10.03</td><td>394</td><td>235</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2496.04	50.71	74.00	-23.29	37.89	26.90	8.63	32.74	10.03	394	235	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2496.04	50.71	74.00	-23.29	37.89	26.90	8.63	32.74	10.03	394	235	PEAK																																		
Avg.	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:5.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2490.04</td><td>42.00</td><td>54.00</td><td>-12.00</td><td>29.18</td><td>26.90</td><td>8.62</td><td>32.73</td><td>10.03</td><td>394</td><td>235</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2490.04	42.00	54.00	-12.00	29.18	26.90	8.62	32.73	10.03	394	235	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2490.04	42.00	54.00	-12.00	29.18	26.90	8.62	32.73	10.03	394	235	AVERAGE																																		



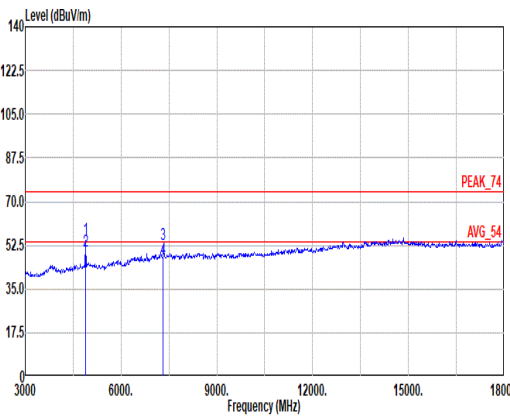
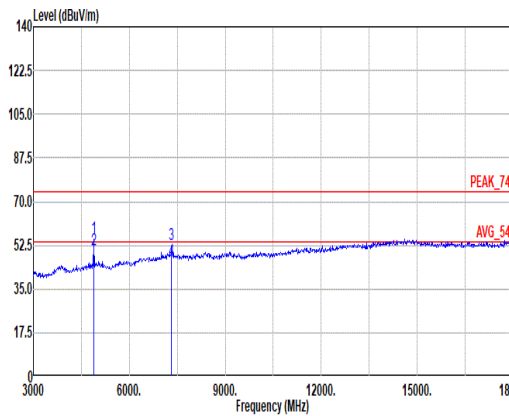


Mode	10																																																																																																																																																																																
	Harmonic																																																																																																																																																																																
	2400-2483.5_Bluetooth-LE GFSK _CH19_2440MHz																																																																																																																																																																																
ANT	1																																																																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																																																																										
Peak Avg.																																																																																																																																																																																	
	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>54.85</td><td>74.00</td><td>-19.15</td><td>43.52</td><td>32.56</td><td>12.26</td><td>33.97</td><td>0.48</td><td>112</td><td>359</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>50.35</td><td>54.00</td><td>-3.65</td><td>39.02</td><td>32.56</td><td>12.26</td><td>33.97</td><td>0.48</td><td>112</td><td>359</td><td>AVERAGE</td></tr><tr><td>3</td><td>7320.00</td><td>52.86</td><td>74.00</td><td>-21.14</td><td>36.72</td><td>37.00</td><td>15.12</td><td>36.42</td><td>0.44</td><td>112</td><td>60</td><td>PEAK</td></tr><tr><td>4</td><td>7320.00</td><td>47.13</td><td>54.00</td><td>-6.87</td><td>30.99</td><td>37.00</td><td>15.12</td><td>36.42</td><td>0.44</td><td>112</td><td>60</td><td>AVERAGE</td></tr></table> Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>55.52</td><td>74.00</td><td>-18.48</td><td>44.19</td><td>32.56</td><td>12.26</td><td>33.97</td><td>0.48</td><td>376</td><td>213</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>50.87</td><td>54.00</td><td>-3.13</td><td>39.54</td><td>32.56</td><td>12.26</td><td>33.97</td><td>0.48</td><td>376</td><td>213</td><td>AVERAGE</td></tr><tr><td>3</td><td>7320.00</td><td>52.63</td><td>74.00</td><td>-21.37</td><td>36.49</td><td>37.00</td><td>15.12</td><td>36.42</td><td>0.44</td><td>317</td><td>211</td><td>PEAK</td></tr><tr><td>4</td><td>7320.00</td><td>46.58</td><td>54.00</td><td>-7.42</td><td>30.44</td><td>37.00</td><td>15.12</td><td>36.42</td><td>0.44</td><td>317</td><td>211</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	54.85	74.00	-19.15	43.52	32.56	12.26	33.97	0.48	112	359	PEAK	2	4880.00	50.35	54.00	-3.65	39.02	32.56	12.26	33.97	0.48	112	359	AVERAGE	3	7320.00	52.86	74.00	-21.14	36.72	37.00	15.12	36.42	0.44	112	60	PEAK	4	7320.00	47.13	54.00	-6.87	30.99	37.00	15.12	36.42	0.44	112	60	AVERAGE		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	55.52	74.00	-18.48	44.19	32.56	12.26	33.97	0.48	376	213	PEAK	2	4880.00	50.87	54.00	-3.13	39.54	32.56	12.26	33.97	0.48	376	213	AVERAGE	3	7320.00	52.63	74.00	-21.37	36.49	37.00	15.12	36.42	0.44	317	211	PEAK	4	7320.00	46.58	54.00	-7.42	30.44	37.00	15.12	36.42	0.44	317	211
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																							
1	4880.00	54.85	74.00	-19.15	43.52	32.56	12.26	33.97	0.48	112	359	PEAK																																																																																																																																																																					
2	4880.00	50.35	54.00	-3.65	39.02	32.56	12.26	33.97	0.48	112	359	AVERAGE																																																																																																																																																																					
3	7320.00	52.86	74.00	-21.14	36.72	37.00	15.12	36.42	0.44	112	60	PEAK																																																																																																																																																																					
4	7320.00	47.13	54.00	-6.87	30.99	37.00	15.12	36.42	0.44	112	60	AVERAGE																																																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																							
1	4880.00	55.52	74.00	-18.48	44.19	32.56	12.26	33.97	0.48	376	213	PEAK																																																																																																																																																																					
2	4880.00	50.87	54.00	-3.13	39.54	32.56	12.26	33.97	0.48	376	213	AVERAGE																																																																																																																																																																					
3	7320.00	52.63	74.00	-21.37	36.49	37.00	15.12	36.42	0.44	317	211	PEAK																																																																																																																																																																					
4	7320.00	46.58	54.00	-7.42	30.44	37.00	15.12	36.42	0.44	317	211	AVERAGE																																																																																																																																																																					



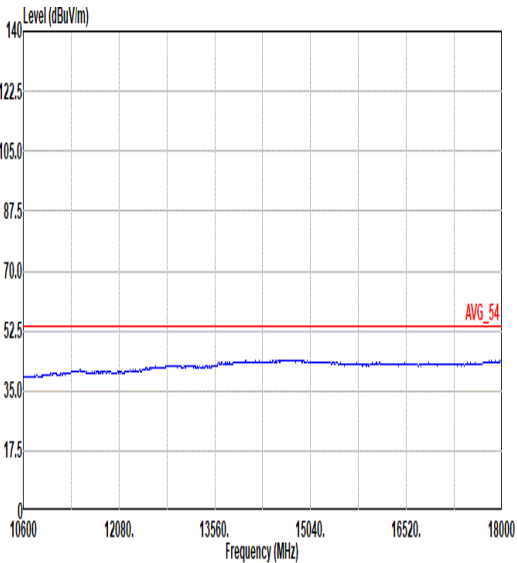
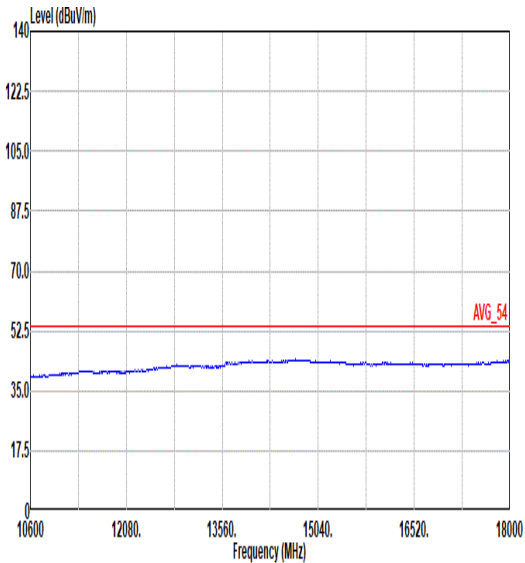


Mode	10	
	Harmonic	
	2400-2483.5_Bluetooth-LE GFSK_CH19_2440MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg.	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL

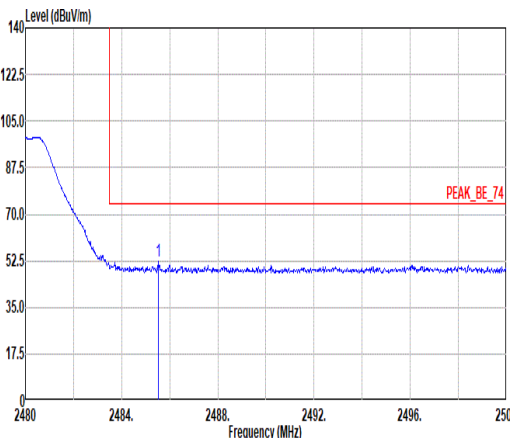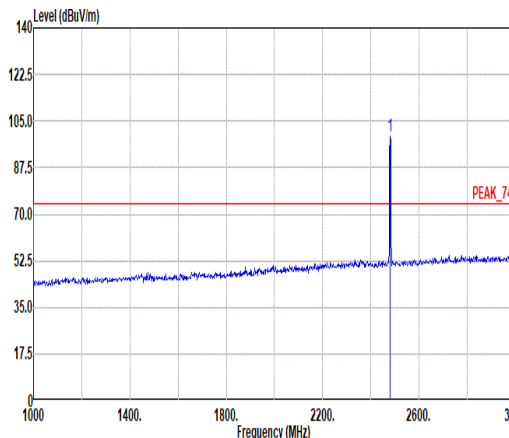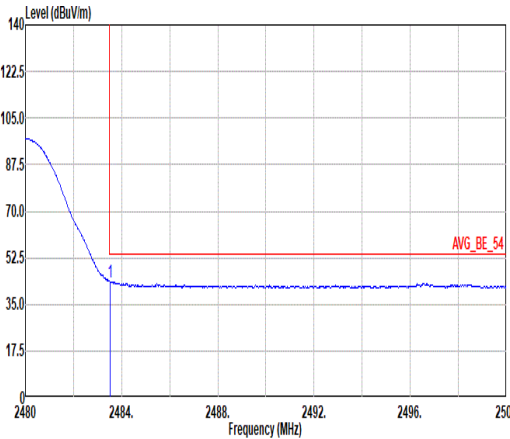
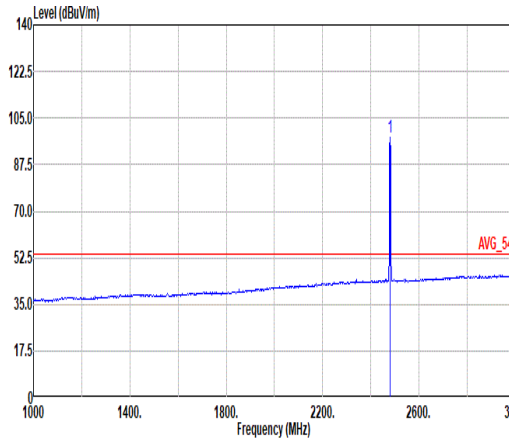


		11																																																																																																	
Mode	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE GFSK_CH39_2480MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto						Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>52.21</td><td>74.00</td><td>-21.79</td><td>39.40</td><td>26.90</td><td>8.61</td><td>32.73</td><td>10.03</td><td>152</td><td>16</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	52.21	74.00	-21.79	39.40	26.90	8.61	32.73	10.03	152	16	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>99.37</td><td>-----</td><td>-----</td><td>86.57</td><td>26.90</td><td>8.60</td><td>32.73</td><td>10.03</td><td>152</td><td>16</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	99.37	-----	-----	86.57	26.90	8.60	32.73	10.03	152	16
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.52	52.21	74.00	-21.79	39.40	26.90	8.61	32.73	10.03	152	16	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	99.37	-----	-----	86.57	26.90	8.60	32.73	10.03	152	16	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:5.600kHz SWT:Auto						Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:5.600kHz SWT:Auto																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>43.48</td><td>54.00</td><td>-10.52</td><td>30.67</td><td>26.90</td><td>8.61</td><td>32.73</td><td>10.03</td><td>152</td><td>16</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	43.48	54.00	-10.52	30.67	26.90	8.61	32.73	10.03	152	16	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>97.92</td><td>-----</td><td>-----</td><td>85.12</td><td>26.90</td><td>8.60</td><td>32.73</td><td>10.03</td><td>152</td><td>16</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	97.92	-----	-----	85.12	26.90	8.60	32.73	10.03	152	16
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.52	43.48	54.00	-10.52	30.67	26.90	8.61	32.73	10.03	152	16	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	97.92	-----	-----	85.12	26.90	8.60	32.73	10.03	152	16	AVERAGE																																																																																							

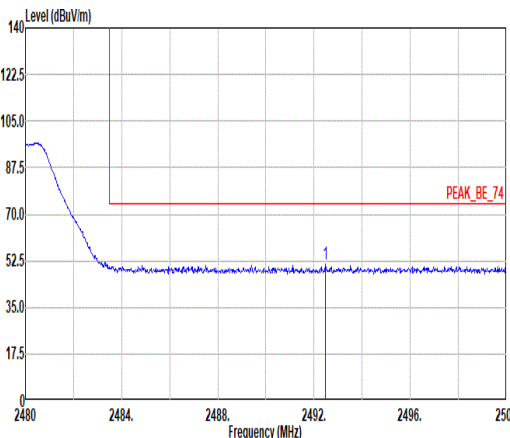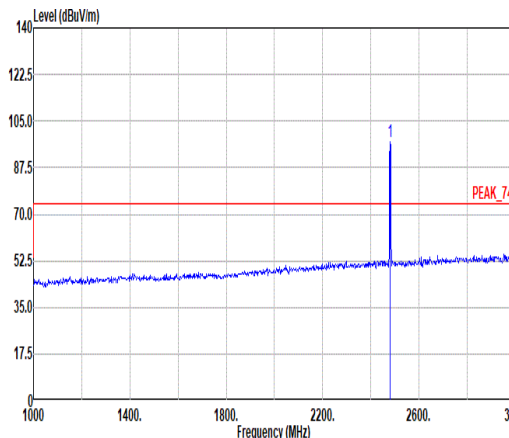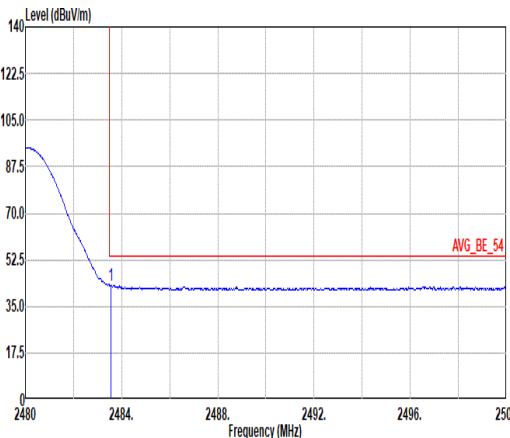
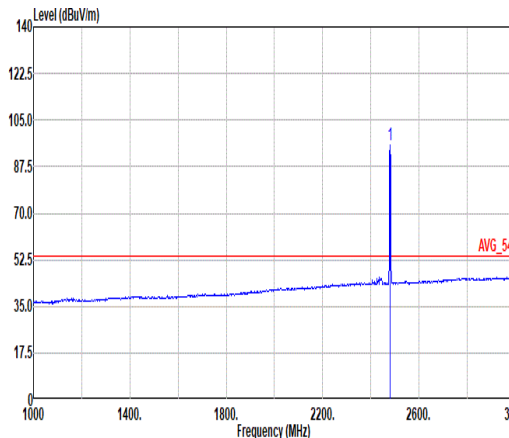


Mode	11																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE GFSK_CH39_2480MHz																																																																									
ANT	1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE_74 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1 2492.46 50.99 74.00 -23.01</td><td>38.17</td><td>26.90</td><td>8.63</td><td>32.74</td><td>10.03</td><td>338</td><td>242</td><td>PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1 2492.46 50.99 74.00 -23.01	38.17	26.90	8.63	32.74	10.03	338	242	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK_74 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1 2480.00 96.97 -----</td><td>84.17</td><td>26.90</td><td>8.60</td><td>32.73</td><td>10.03</td><td>338</td><td>242</td><td>PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1 2480.00 96.97 -----	84.17	26.90	8.60	32.73	10.03	338	242	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																						
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																										
1 2492.46 50.99 74.00 -23.01	38.17	26.90	8.63	32.74	10.03	338	242	PEAK																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																						
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																										
1 2480.00 96.97 -----	84.17	26.90	8.60	32.73	10.03	338	242	PEAK																																																																		
Avg.	 Level (dBuV/m) Frequency (MHz) AVG_BE_54 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:5.600kHz SWT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1 2483.54 42.97 54.00 -11.03</td><td>30.16</td><td>26.90</td><td>8.61</td><td>32.73</td><td>10.03</td><td>338</td><td>242</td><td>AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1 2483.54 42.97 54.00 -11.03	30.16	26.90	8.61	32.73	10.03	338	242	AVERAGE	 Level (dBuV/m) Frequency (MHz) AVG_54 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:5.600kHz SWT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1 2480.00 95.72 -----</td><td>82.92</td><td>26.90</td><td>8.60</td><td>32.73</td><td>10.03</td><td>338</td><td>242</td><td>AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1 2480.00 95.72 -----	82.92	26.90	8.60	32.73	10.03	338	242	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																						
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																										
1 2483.54 42.97 54.00 -11.03	30.16	26.90	8.61	32.73	10.03	338	242	AVERAGE																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																						
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																										
1 2480.00 95.72 -----	82.92	26.90	8.60	32.73	10.03	338	242	AVERAGE																																																																		

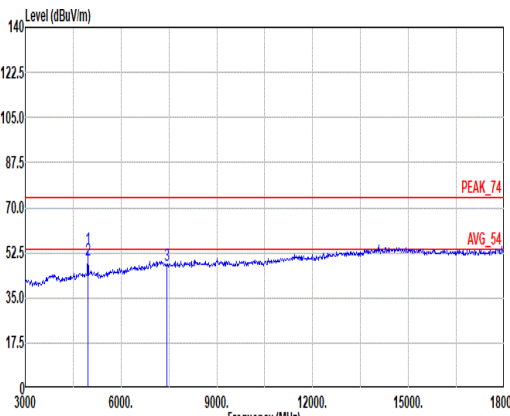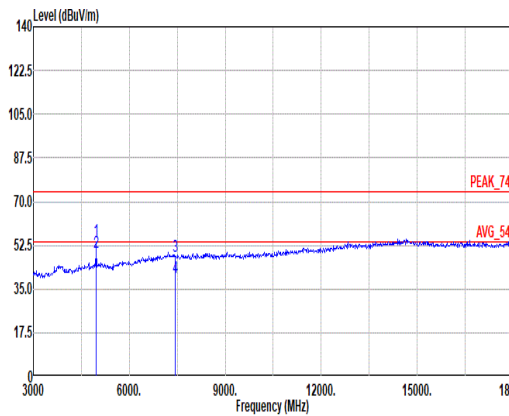

Mode	11																																																																																													
	Harmonic																																																																																													
	2400-2483.5_Bluetooth-LE GFSK _CH39_2480MHz																																																																																													
ANT	1																																																																																													
Pol.	Horizontal						Vertical																																																																																							
Peak Avg.																																																																																														
	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL						Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL																																																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>53.82</td><td>74.00</td><td>-20.18</td><td>42.40</td><td>32.70</td><td>12.26</td><td>33.97</td><td>0.43</td><td>322</td><td>218</td><td>PEAK</td></tr><tr><td>2</td><td>4960.00</td><td>49.77</td><td>54.00</td><td>-4.23</td><td>38.35</td><td>32.70</td><td>12.26</td><td>33.97</td><td>0.43</td><td>322</td><td>218</td><td>AVERAGE</td></tr><tr><td>3</td><td>7440.00</td><td>47.41</td><td>74.00</td><td>-26.59</td><td>31.34</td><td>36.90</td><td>15.25</td><td>36.49</td><td>0.41</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	53.82	74.00	-20.18	42.40	32.70	12.26	33.97	0.43	322	218	PEAK	2	4960.00	49.77	54.00	-4.23	38.35	32.70	12.26	33.97	0.43	322	218	AVERAGE	3	7440.00	47.41	74.00	-26.59	31.34	36.90	15.25	36.49	0.41	--	--	PEAK													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	4960.00	53.82	74.00	-20.18	42.40	32.70	12.26	33.97	0.43	322	218	PEAK																																																																																		
2	4960.00	49.77	54.00	-4.23	38.35	32.70	12.26	33.97	0.43	322	218	AVERAGE																																																																																		
3	7440.00	47.41	74.00	-26.59	31.34	36.90	15.25	36.49	0.41	--	--	PEAK																																																																																		
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>54.40</td><td>74.00</td><td>-19.60</td><td>42.98</td><td>32.70</td><td>12.26</td><td>33.97</td><td>0.43</td><td>326</td><td>218</td><td>PEAK</td></tr><tr><td>2</td><td>4960.00</td><td>49.75</td><td>54.00</td><td>-4.25</td><td>38.33</td><td>32.70</td><td>12.26</td><td>33.97</td><td>0.43</td><td>326</td><td>218</td><td>AVERAGE</td></tr><tr><td>3</td><td>7440.00</td><td>48.06</td><td>74.00</td><td>-25.94</td><td>31.99</td><td>36.90</td><td>15.25</td><td>36.49</td><td>0.41</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>7440.00</td><td>39.47</td><td>54.00</td><td>-14.53</td><td>23.40</td><td>36.90</td><td>15.25</td><td>36.49</td><td>0.41</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	54.40	74.00	-19.60	42.98	32.70	12.26	33.97	0.43	326	218	PEAK	2	4960.00	49.75	54.00	-4.25	38.33	32.70	12.26	33.97	0.43	326	218	AVERAGE	3	7440.00	48.06	74.00	-25.94	31.99	36.90	15.25	36.49	0.41	--	--	PEAK	4	7440.00	39.47	54.00	-14.53	23.40	36.90	15.25	36.49	0.41	--	--	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	4960.00	54.40	74.00	-19.60	42.98	32.70	12.26	33.97	0.43	326	218	PEAK																																																																																		
2	4960.00	49.75	54.00	-4.25	38.33	32.70	12.26	33.97	0.43	326	218	AVERAGE																																																																																		
3	7440.00	48.06	74.00	-25.94	31.99	36.90	15.25	36.49	0.41	--	--	PEAK																																																																																		
4	7440.00	39.47	54.00	-14.53	23.40	36.90	15.25	36.49	0.41	--	--	AVERAGE																																																																																		

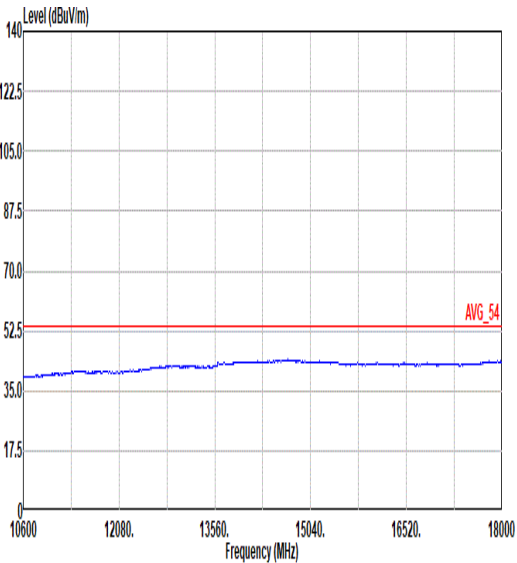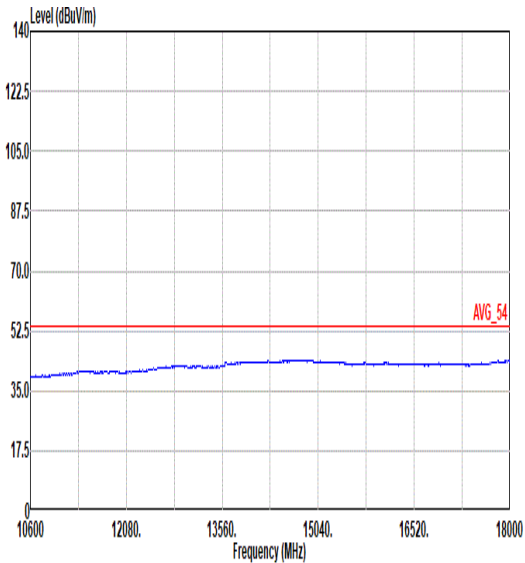

Mode	11	
	Harmonic	
	2400-2483.5_Bluetooth-LE GFSK _CH39_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg.	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 1Mbps	60.29	378	2.65	2.7kHz
Bluetooth - LE for 2Mbps	30.77	192	5.21	5.6kHz

