

SHENZHEN TLT COMMUNICATION CO.,LTD

Building 1, Rooms 108-109, Shanhai Science and Innovation Park, Zhongyu Guan Avenue, Longhua New District, Shenzhen City

A11P2-A333-WIFI antenna The Product Recognition Letter

The Customer	yanghua	Band range	2.4/5.8G
Model	A11P2-A333	Version	Latest version
Project code name	TLT 5545	Antenna type	PIFA
RF Designer	Mao Hangzhou	RD Designer	Tang Chunzheng
Date of this	2025-4-16	Date of this	2025-4-16
Customer Information:			

Metric

1. Antenna parameters

1.1 Electrical parameters

1.1.1 Electrical Performance Assessment

1.1.2 distribution circuit diagram

1.2 Structural parameters

1.2.1 antenna assembly

1.2.2 Performance test requirements

2. The test

2.1 The VSWR test

2.1.1 test connection

2.1.2 voltage standing to wave ratio

2.2 GAIN & EFFCIENCY

2.2.1 test environment

2.2.2 Test Equipment

3. Summary

4. Attachment diagram

4.1 Parameter diagram of return loss and voltage standing wave ratio

5. WIFI graphics and test data

5.1.1 WIFI field test

5.1.2 WIFI throughput test

5.2 Gain and efficiency tests

6. Antenna assembly and processing drawing file

7. Antenna 2D profile

1. Antenna parameters

This report mainly provides test conditions and results for various electrical and structural properties in devicetests, The antenna designed by TLT.

Electrical parameters

1.1.1 Electrical Performance Assessment

The band range of the antenna is 2400MHz-2500MHz and 5000MHz~5800MHz. below are the basic parameters of the electrical performance of the antenna. This is designed antenna and produced by Tian Lu Tong.

1.1.2 distribution circuit diagram

Use the original matching circuit diagram on the PCB board

1.2 Structural parameters

1.2.1 antenna assembly

Antennas generally consisted of plastic supports and hardware pieces.

1.2.2 can test the requirements

Test item	description	Acceptance criteria
1. crytemperature test	temperature:-20℃ Time: 24 hours	The 1. had no obvious damage The 2. electrical performance meets the standard
The 2. high-temperature test	temperature.: 80℃ Time: 24 hours	The 1. had no obvious damage The 2. electrical performance meets the standard
3. salt fog test	5 ± 0.1% salt mist PH-value: 6.5-7.2 temperature: 35±1℃ Time: 24 hours	1.No color was changed 2.There are no obvious cracks in the appearance
4. environmental adaptability test	Total value of Pb, Hg, Cr+6, Cd in packing materials is smaller than 50PPM Pb, Hg, Cr+6, PBBs, PBDEs in components are smaller than 500PPM, Cd is smaller than 50PPM	

2. The test

Antenna are installed in a customer provided phone for testing. describes the antenna in mobile for the equipment (electrical performance test).

2.1 The VSWR test

2.1.1 Test the connection

Test VSWR order of device connections: Agilent E8753 network analyzer → test cable → customer-provided machine

2.1.2 voltage standing to wave ratio

The table below describes the values of the voltage resident wave ratio of the antenna at the two endpoints of the frequency band, involving drawings about the return impairment and resident wave ratio, please refer .

	WIFI-2.4G		WIFI-5.0G	
Frequency (MHz)	2.4G	2.48G	5.15G	5.85G
VSWR	1.17	1.21	1.52	4.60
Return Loss	-22.33	-20.40	-13.69	-4.17

2.2 GAIN & EFFCIENCY

2.2.1 test environment

Skyway microwave dark chamber: The test frequency range from 800MHz to 6GHz, in a 50cm diameter spherical area, and the dark chamber is reflected less than-50 dB. from 800MHz—6GHz

2.2.2 Test the equipment

Agilent 8960 (8753C) Wireless Communication Test Device, Dipole antenna, French Satimo Antenna Test System, Printer, etc.


Main antenna	2.40G	2.48G	5.20G	5.85G
Gain (dBi)	1.46	2.08	0.92	0.61
Efficiency (%)	36.73	47.1	35.77	28.78

3. summary

The antenna is designed according to the machine samples provided by the customer, and the electrical parameters and result performance of the antenna meet the standard, and we are sure to make you satisfied.

4. Attachment diagram

4.1 Parameter diagram of return loss and voltage standing wave ratio

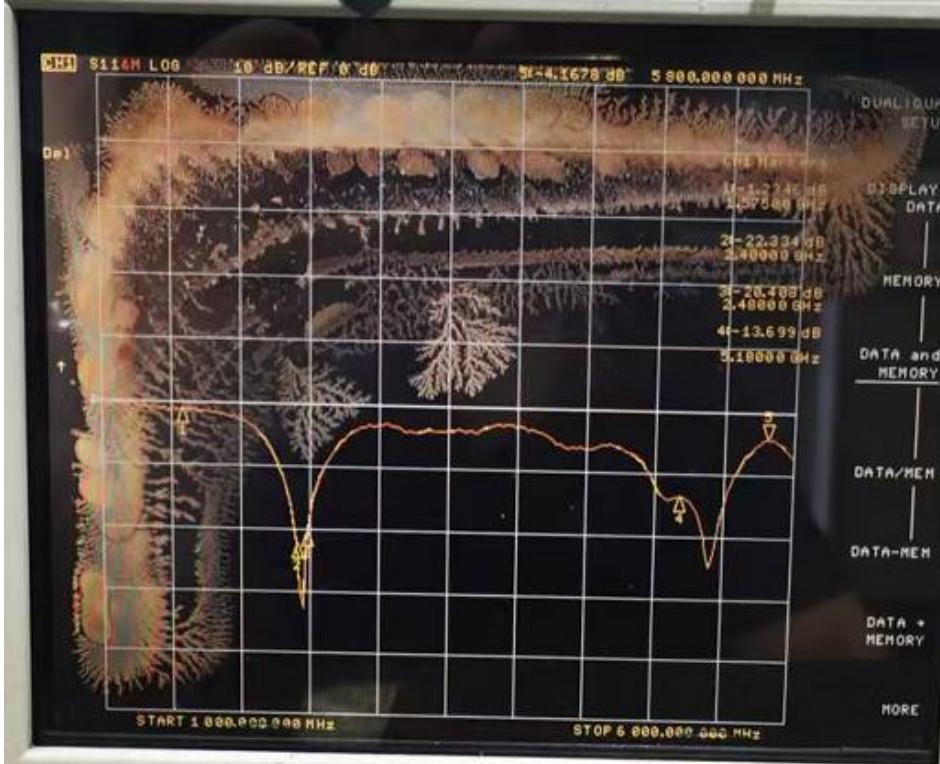


5. WIFI graphics and test data

5.1.1 WIFI field test: Test environment: open environment, 15 meters away from our router. The test is as follows:




2.4G-WIFI display -35dBm ,
full signal

5G-WIFI display -40dBm ,
full signal

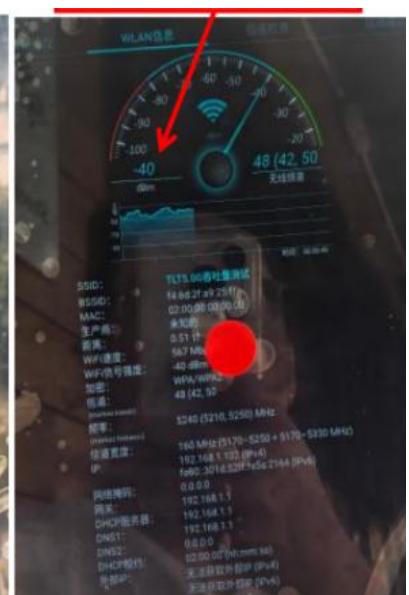


5.1.2 WIFI throughput test:

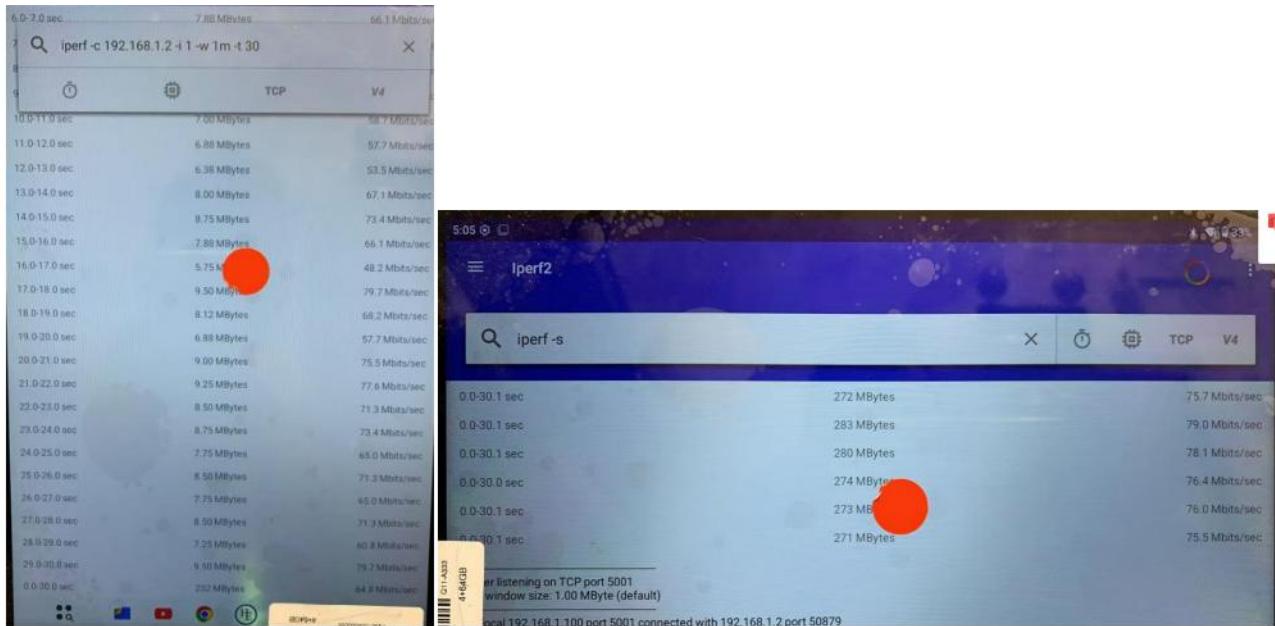

2.4G TX 64.8M

2.4G RX 75.5M

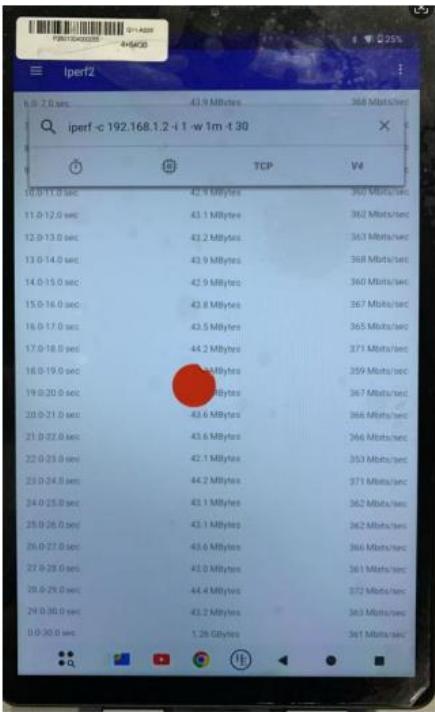


iperf -s		
0-30.0 sec	1.45 GBytes	415 Mbits/sec
0-30.0 sec	1.45 GBytes	415 Mbits/sec
0-30.0 sec	1.41 GBytes	403 Mbits/sec
0-30.0 sec	1.41 GBytes	404 Mbits/sec
0-30.0 sec	1.41 GBytes	405 Mbits/sec
0-30.0 sec	1.42 GBytes	407 Mbits/sec

5G TX 361M

5G RX 407M

5.2 WIFI gain and efficiency test:

Test Point ID	Freq. (MHz)	TRP (dBm)	Gain (dBi)	Efficiency (%)	Efficiency (dB)
1	2400.0	2400.00	-0.35	38.9%	-4.10
2	2405.0	2405.00	-1.96	26.8%	-5.72
3	2410.0	2410.00	-1.13	32.4%	-4.89
4	2415.0	2415.00	-0.12	41.0%	-3.87
5	2420.0	2420.00	-0.20	40.2%	-3.96
6	2425.0	2425.00	0.00	41.3%	-3.84
7	2430.0	2430.00	0.30	43.4%	-3.63
8	2435.0	2435.00	-0.36	36.9%	-4.33
9	2440.0	2440.00	-0.69	33.8%	-4.72
10	2445.0	2445.00	-0.03	39.1%	-4.08
11	2450.0	2450.00	-0.14	37.9%	-4.21
12	2455.0	2455.00	-0.48	34.9%	-4.57
13	2460.0	2460.00	-0.30	36.4%	-4.39
14	2465.0	2465.00	-0.85	32.2%	-4.92
15	2470.0	2470.00	-0.55	34.7%	-4.60
16	2475.0	2475.00	-0.20	38.3%	-4.16
17	2480.0	2480.00	-1.26	39.5%	-5.16
18	2485.0	2485.00	-1.77	37.6%	-5.59
19	2490.0	2490.00	-0.85	34.7%	-4.59
20	2495.0	2495.00	0.38	46.4%	-3.33
21	2500.0	2500.00	-0.49	37.5%	-4.26
22	5150.0	5150.00	0.63	34.7%	-4.60
23	5200.0	5200.00	0.10	31.2%	-5.06
24	5250.0	5250.00	-1.98	38.4%	-7.34
25	5300.0	5300.00	0.58	31.7%	-4.99
26	5350.0	5350.00	-3.09	34.0%	-8.55
27	5400.0	5400.00	0.30	34.4%	-4.64
28	5450.0	5450.00	-0.50	46.8%	-5.72
29	5500.0	5500.00	-1.83	40.7%	-6.83
30	5550.0	5550.00	0.48	34.1%	-4.68
31	5600.0	5600.00	-0.04	38.3%	-5.49
32	5650.0	5650.00	0.60	33.7%	-4.73
33	5700.0	5700.00	-0.41	35.2%	-5.99
34	5750.0	5750.00	-0.67	33.0%	-6.38
35	5800.0	5800.00	1.06	37.7%	-4.24
36	5850.0	5850.00	-0.57	23.3%	-6.33

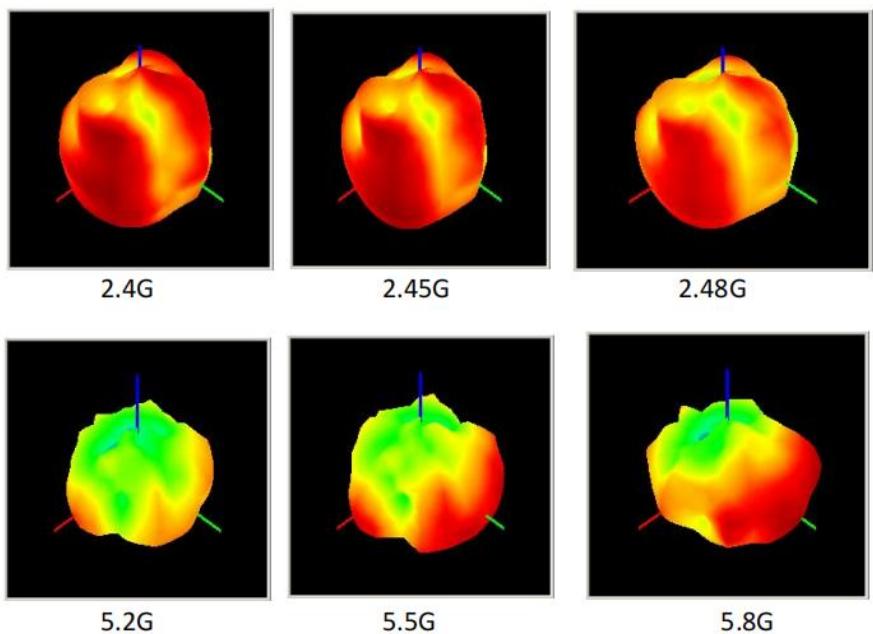


5.3 WIFI OTA:

WIFI 2.4G RF Testing		11B(11Mbps)		
Channel	Frequency(Mhz)	TCH 1	TCH 6	TCH 11
	2412	2412	2437	2462
	TRP(dBm)	12.66	13.81	12.79
	TIS(dBm)	-74	-75	-73

WIFI 5G RF Testing		11A(6Mbps)		
Channel	Frequency(Mhz)	TCH 36	TCH 100	TCH 157
	5180	5180	5500	5785
	TRP(dBm)	12.46	12.88	12.16
	TIS(dBm)	-83	-84	-84

6. Antenna assembly and processing drawing file

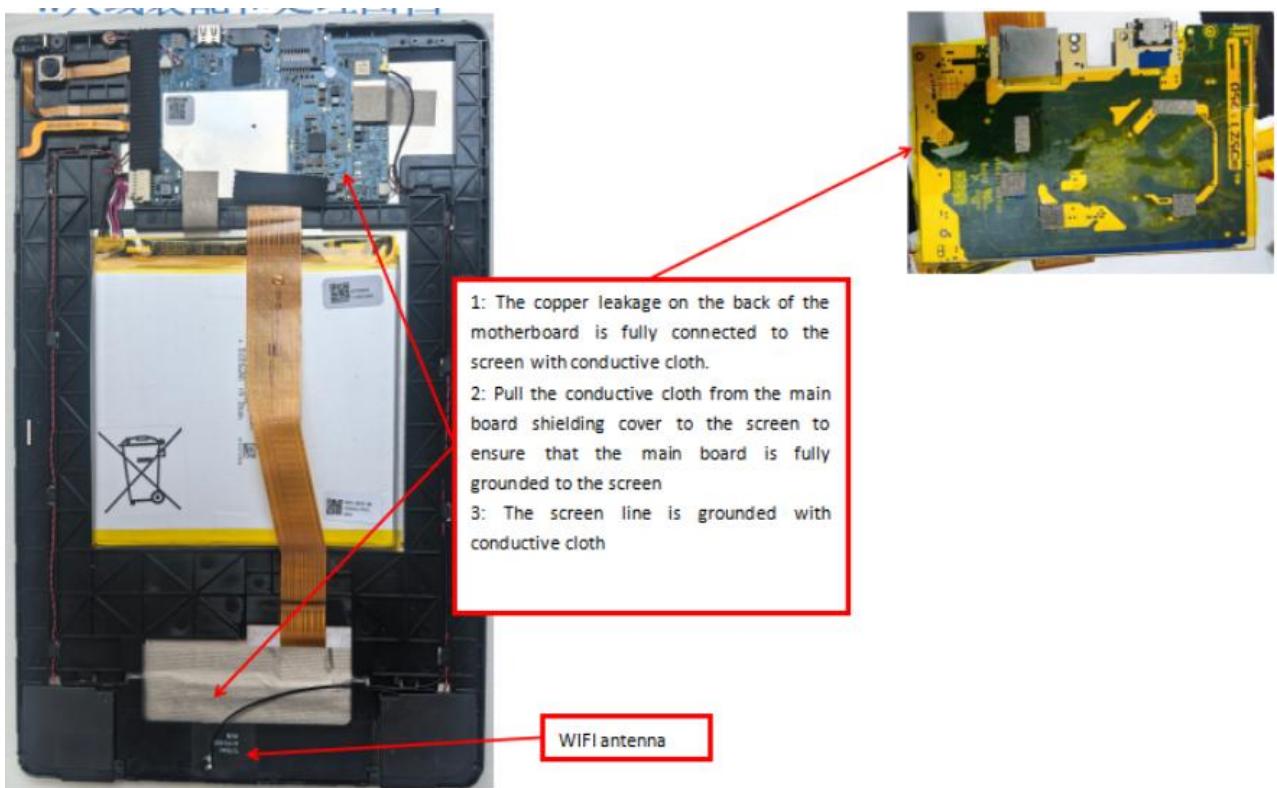

7. Antenna 2D profile

