



## FCC 47 CFR PART 15 SUBPART C

### TEST REPORT

For

Tablet Computer

Model: A5008

Brand: acer

Test Report Number:

**C150824Z01-RP1-2**

*Prepared for*

Acer Incorporated

8F, 88, Sec 1, Hsin Tai Wu Rd Hsichih, Taipei Hsien, 221 Taiwan

*Prepared by*

**COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.**

No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,  
Guan Lan Town, Baoan District, Shenzhen China

TEL: 86-755-28055000

FAX: 86-755-28055221

**Issued Date: September 7, 2015**



**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc. This document may be altered or revised by Compliance Certification Services (Shenzhen) Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST, CNAS or any government agencies. The test result of this report relate only to the tested sample identified in this report.



## Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	September 7, 2015	Initial Issue	ALL	Sabrina Wang



## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION .....</b>	<b>4</b>
<b>2. EUT DESCRIPTION .....</b>	<b>5</b>
<b>3. TEST METHODOLOGY .....</b>	<b>6</b>
3.1 DESCRIPTION OF TEST MODES.....	6
<b>4. FACILITIES AND ACCREDITATIONS.....</b>	<b>7</b>
4.1 FACILITIES.....	7
4.2 ACCREDITATIONS.....	7
4.3 MEASUREMENT UNCERTAINTY.....	7
<b>5. SETUP OF EQUIPMENT UNDER TEST.....</b>	<b>8</b>
5.1 SETUP CONFIGURATION OF EUT .....	8
5.2 SUPPORT EQUIPMENT .....	8
<b>6. FCC PART 15.247 REQUIREMENTS.....</b>	<b>9</b>
6.1 20DB BANDWIDTH.....	9
6.2 ANTENNA GAIN .....	14
6.3 PEAK POWER.....	15
6.4 PEAK POWER SPECTRAL DENSITY .....	17
6.5 BAND EDGES MEASUREMENT .....	18
6.6 FREQUENCY SEPARATION.....	28
6.7 NUMBER OF HOPPING FREQUENCY.....	31
6.8 TIME OF OCCUPANCY (DWELL TIME).....	33
6.9 SPURIOUS EMISSIONS .....	40
6.10 POWERLINE CONDUCTED EMISSIONS.....	58



## 1. TEST RESULT CERTIFICATION

<b>Product:</b>	Tablet Computer
<b>Model:</b>	A5008
<b>Brand:</b>	acer
<b>Tested:</b>	August 24~September 7, 2015
<b>Applicant:</b>	<b>Acer Incorporated</b> 8F, 88, Sec 1, Hsin Tai Wu Rd Hsichih, Taipei Hsien, 221 Taiwan
<b>Manufacturer:</b>	<b>Acer Incorporated</b> 8F, 88, Sec 1, Hsin Tai Wu Rd Hsichih, Taipei Hsien, 221 Taiwan

### APPLICABLE STANDARDS

STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services (Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

*Approved by:*

**Sunday Hu**  
Supervisor of RF Dept.  
Compliance Certification Services  
(Shenzhen) Inc.

*Reviewed by:*

**Ruby Zhang**  
Supervisor of Report Dept.  
Compliance Certification Services  
(Shenzhen) Inc.



## 2. EUT DESCRIPTION

<b>Product</b>	Tablet Computer
<b>Model Number</b>	A5008
<b>Brand</b>	acer
<b>Model Discrepancy</b>	N/A
<b>Identify Number</b>	C150824Z01-RP1-2
<b>Received Date</b>	August 24, 2015
<b>Power Supply</b>	DC5.35V supplied by the Adapter or DC3.7V supplied by the battery
<b>Adapter Manufacturer /Model No.</b>	<b>Adapter 1:</b> Delta / ADP-10HW A I/P: 100-240Vac, 50/60Hz, 0.4A O/P: 5.35Vdc, 2A <b>Adapter 2:</b> LITEON / PA-1100-25 I/P: 100-240Vac, 50/60Hz, 0.3A O/P: 5.35Vdc, 2.0A
<b>Frequency Range</b>	2402 ~ 2480 MHz
<b>Transmit Power</b>	GFSK : 6.74dBm $\pi/4$ -DQPSK: 1.13dBm 8DPSK : -1.43dBm
<b>Modulation Technique</b>	FHSS (GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8DPSK for 3Mbps)
<b>Number of Channels</b>	79 Channels
<b>Antenna Specification</b>	FPC Antenna with 4.4dBi gain (Max)
<b>Temperature Range</b>	0°C ~ +35°C
<b>Hardware Version</b>	A10_V1.1
<b>Software Version</b>	Acer_AV0L0_B3-A20_RV00RB03_WW_GEN1

**Note:** This submittal(s) (test report) is intended for FCC ID: HLZA5008 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



### 3. TEST METHODOLOGY

#### 3.1 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Test Item	Test mode	Worse mode
Conducted Emission	<b>Mode 1:</b> Copy Data + LCD panel (M101AI01-TII40-A04)	<input type="checkbox"/>
	<b>Mode 2:</b> Adapter(ADP-10HW A) + Play Video + LCD panel (M101AI01-TII40-A04)	<input checked="" type="checkbox"/>
	<b>Mode 3:</b> Adapter(PA-1100-25) + Play Video + LCD panel (M101AI01-TII40-A04)	<input type="checkbox"/>
	<b>Mode 4:</b> Adapter(ADP-10HW A) + Play Video + LCD panel (KD101N37-40NA-A10)	<input type="checkbox"/>
Radiated Emission	<b>Mode 1:</b> TX	<input checked="" type="checkbox"/>

Channel Low (2402MHz)、Mid (2441MHz) and High (2480MHz) were chosen for pre-testing for GFSK、 $\pi/4$ -DQPSK and 8DPSK, GFSK and 8DPSK were the worse case and print in the report.



## 4. FACILITIES AND ACCREDITATIONS

### 4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

**No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,  
Guan Lan Town, Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.10:2013, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 4.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

<b>USA</b>	A2LA
<b>China</b>	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

<b>USA</b>	FCC
<b>Japan</b>	VCCI(C-3478, R-3135, T-652, G-624)
<b>Canada</b>	INDUSTRY CANADA
<b>Taiwan</b>	BSMI

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccssz.com>

### 4.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



## 5. SETUP OF EQUIPMENT UNDER TEST

### 5.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### 5.2 SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.	FCC	Brand	Data Cable	Power Cord
1	N/A						

**Notes:**

*Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*



## 6. FCC PART 15.247 REQUIREMENTS

### 6.1 20DB BANDWIDTH


None; for reporting purpose only.

### **MEASUREMENT EQUIPMENT USED**

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	02/28/2015	02/27/2016

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### **TEST CONFIGURATION**

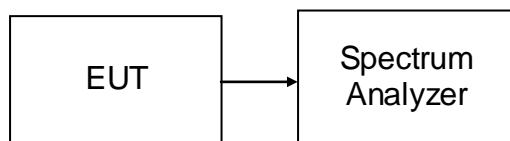

### **TEST PROCEDURE**


1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT, then connect a low loss RF cable from antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=30kHz, VBW=100kHz, Span=3MHz, Sweep = auto.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the test channels are investigated.


### **TEST RESULTS**

No non-compliance noted




Test plot

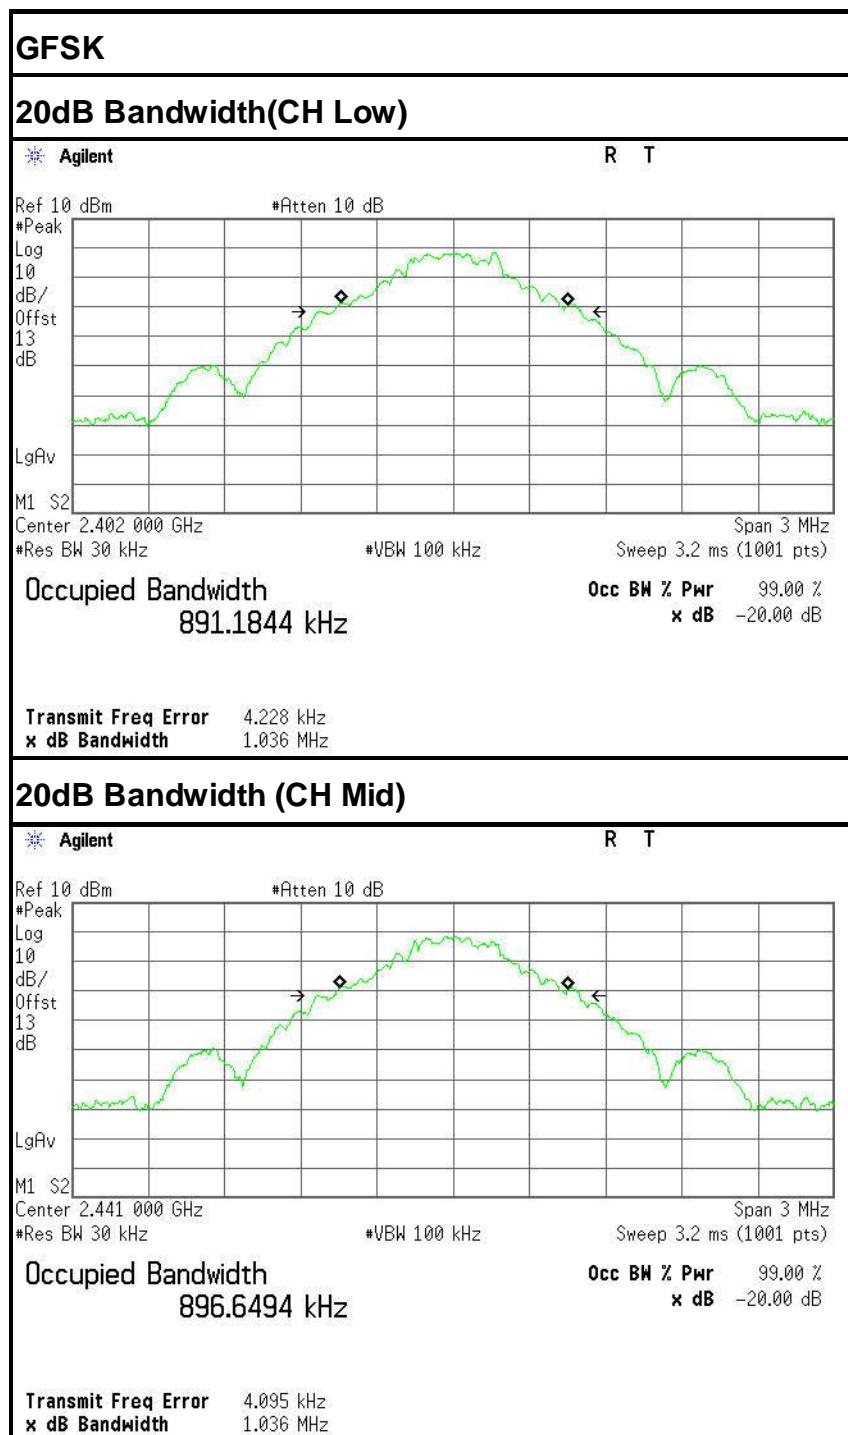


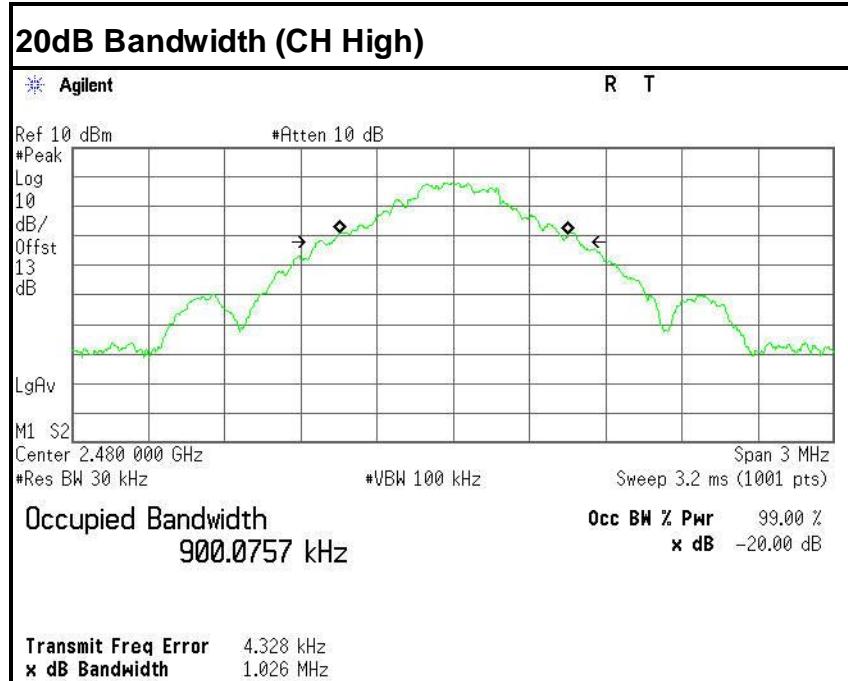



Test plot

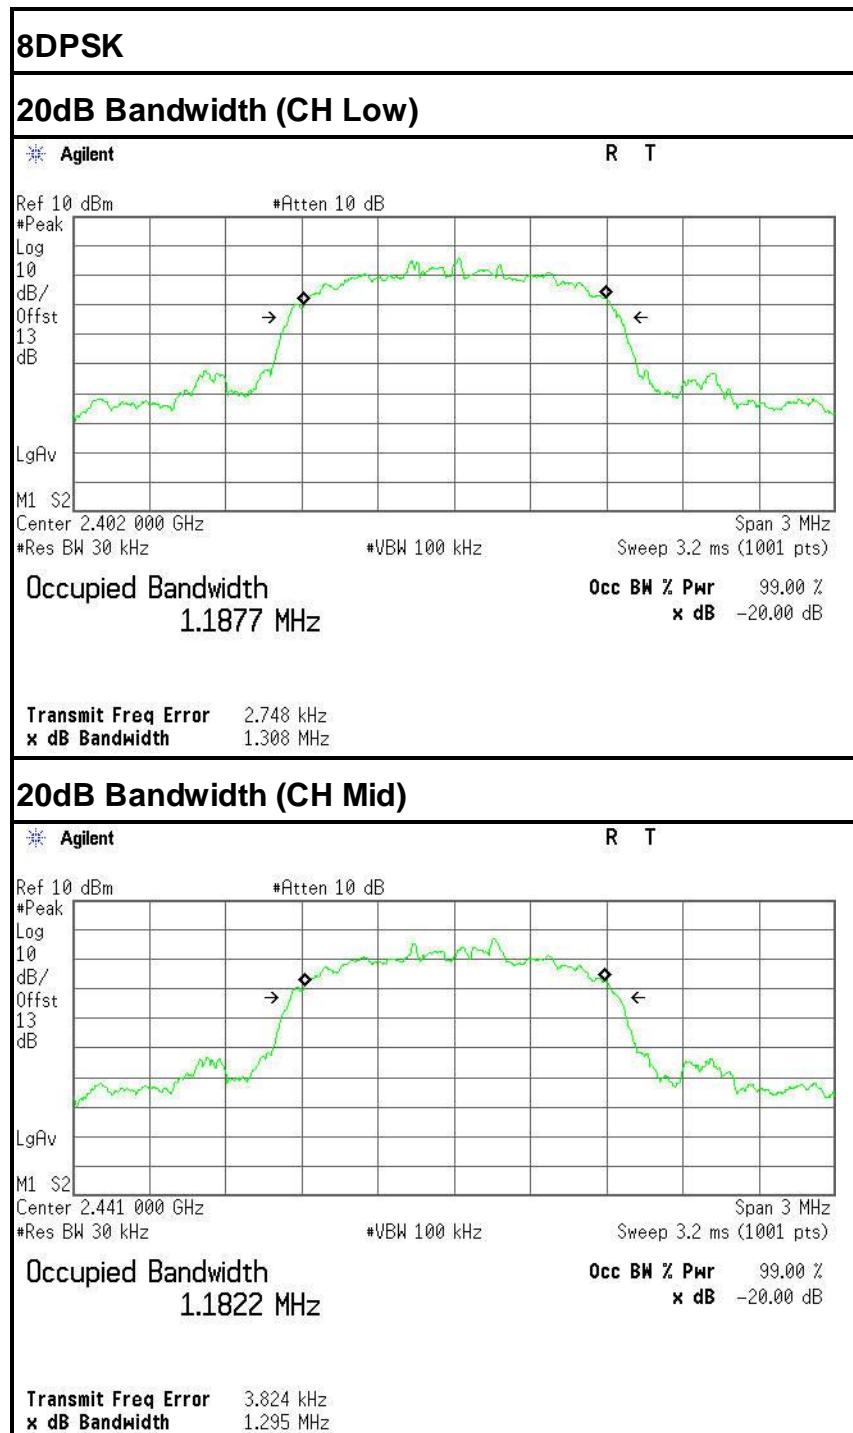

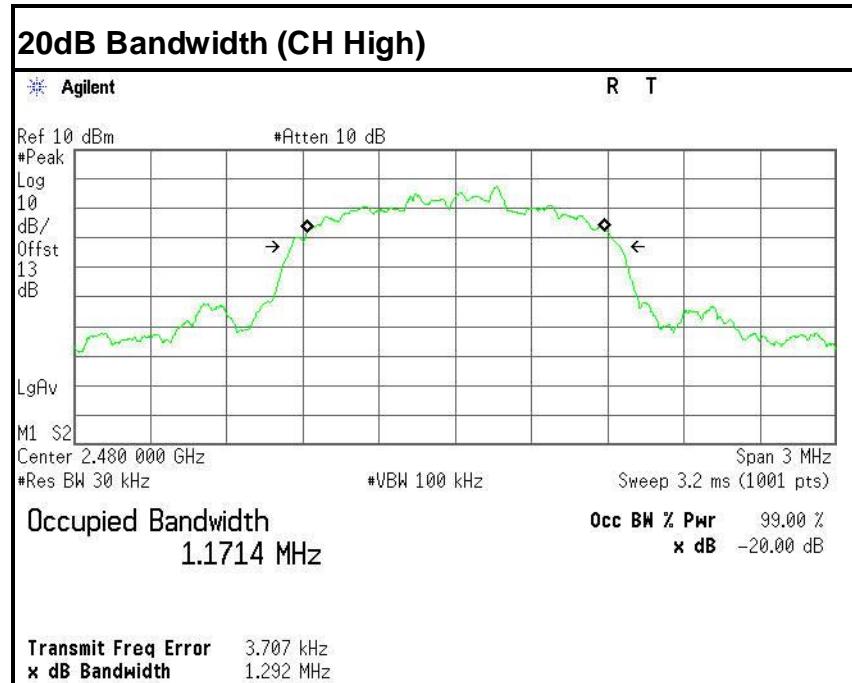



## 6.2 ANTENNA GAIN MEASUREMENT

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal BT devices, the GFSK mode is used.

### MEASUREMENT PARAMETERS

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz
Trace-Mode	Max hold

### LIMITS

FCC	IC
Antenna Gain	
6 dBi	

### TEST RESULTS

#### GFSK

T <sub>nom</sub>	V <sub>nom</sub>	Lowest channel 2402MHz	Middle channel 2441MHz	Highest channel 2480MHz
Conducted power [dBm] Measured with GFSK modulation		1.09	0.61	1.74
Radiated power [dBm] Measured with GFSK modulation		-2.34	-2.24	-2.20
Gain [dBi] Calculated		-3.43	-2.85	-3.94
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)		

#### 8DPSK

T <sub>nom</sub>	V <sub>nom</sub>	Lowest channel 2402MHz	Middle channel 2441MHz	Highest channel 2480MHz
Conducted power [dBm] Measured with 8DPSK modulation		-1.57	-1.43	-1.70
Radiated power [dBm] Measured with 8DPSK modulation		-1.34	-1.09	-0.88
Gain [dBi] Calculated		0.23	0.34	-0.82
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)		



## 6.3 PEAK POWER

### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:


1. For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.
3. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Power Meter	Anritsu	ML2495A	1204003	02/28/2015	02/27/2016
Power Sensor	Anritsu	MA2411B	1126150	02/28/2015	02/27/2016

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### Test Configuration

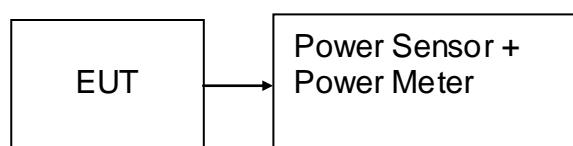

### TEST PROCEDURE

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.



## TEST RESULTS

No non-compliance noted

### Test Data

#### GFSK

Channel	Frequency (MHz)	Reading Power (dBm)	Cable loss (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak /AVG	Result
Low	2402	-2.41	3.50	1.09	0.00129	1	peak	PASS
Mid	2441	-2.89	3.50	0.61	0.00115			PASS
High	2480	3.24	3.50	6.74	0.00472			PASS
Low	2402	-2.65	3.50	0.85	0.00122	1	AVG	PASS
Mid	2441	-2.63	3.50	0.87	0.00122			PASS
High	2480	-3.14	3.50	0.36	0.00109			PASS

#### $\pi/4$ -DQPSK

Channel	Frequency (MHz)	Reading Power (dBm)	Cable loss (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak /AVG	Result
Low	2402	-2.37	3.50	1.13	0.00130	1	peak	PASS
Mid	2441	-2.79	3.50	0.71	0.00118			PASS
High	2480	-3.20	3.50	0.30	0.00107			PASS
Low	2402	-2.68	3.50	0.82	0.00121	1	AVG	PASS
Mid	2441	-3.18	3.50	0.32	0.00108			PASS
High	2480	-2.80	3.50	0.70	0.00117			PASS

#### 8DPSK

Channel	Frequency (MHz)	Reading Power (dBm)	Cable loss (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak /AVG	Result
Low	2402	-5.07	3.50	-1.57	0.00070	1	peak	PASS
Mid	2441	-4.93	3.50	-1.43	0.00072			PASS
High	2480	-5.20	3.50	-1.70	0.00068			PASS
Low	2402	-2.88	3.50	0.62	0.00115	1	AVG	PASS
Mid	2441	-2.60	3.50	0.90	0.00123			PASS
High	2480	-2.88	3.50	0.62	0.00115			PASS



## 6.4 PEAK POWER SPECTRAL DENSITY

### LIMIT


1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	02/28/2015	02/27/2016

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### Test Configuration

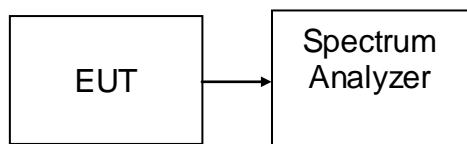

### TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### TEST RESULTS

*Not applicable. Since EUT is the Bluetooth device.*

## 6.5 BAND EDGES MEASUREMENT


### LIMIT

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	Agilent	N9038A	US44300399	02/28/2015	02/27/2016
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/28/2015	02/27/2016
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2015	03/18/2016
High Noise Amplifier	Agilent	8449B	3008A01838	02/28/2015	02/27/2016
Board-Band Hom Antenna	Schwarzbeck	BBHA9170	9170-497	02/28/2015	02/27/2016
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/28/2015	02/27/2016
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/28/2015	02/27/2016
Loop Antenna	A, R, A	PLA-1030/B	1029	09/25/2014	09/24/2015
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2015	02/27/2016
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

### Test Configuration

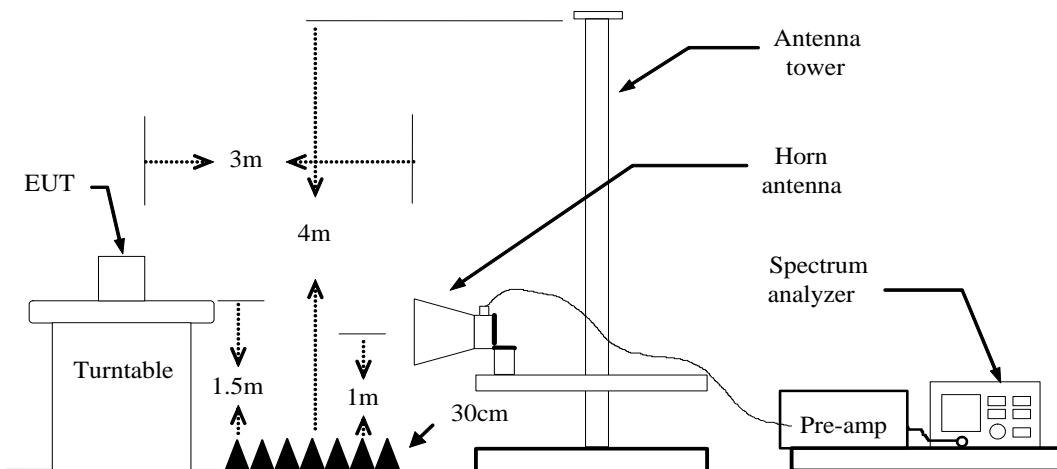



## **TEST PROCEDURE**


1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=330Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

## **TEST RESULTS**



Refer to attach spectrum analyzer data chart.

Test Data ( GFSK )

## Band Edges (CH-Low)

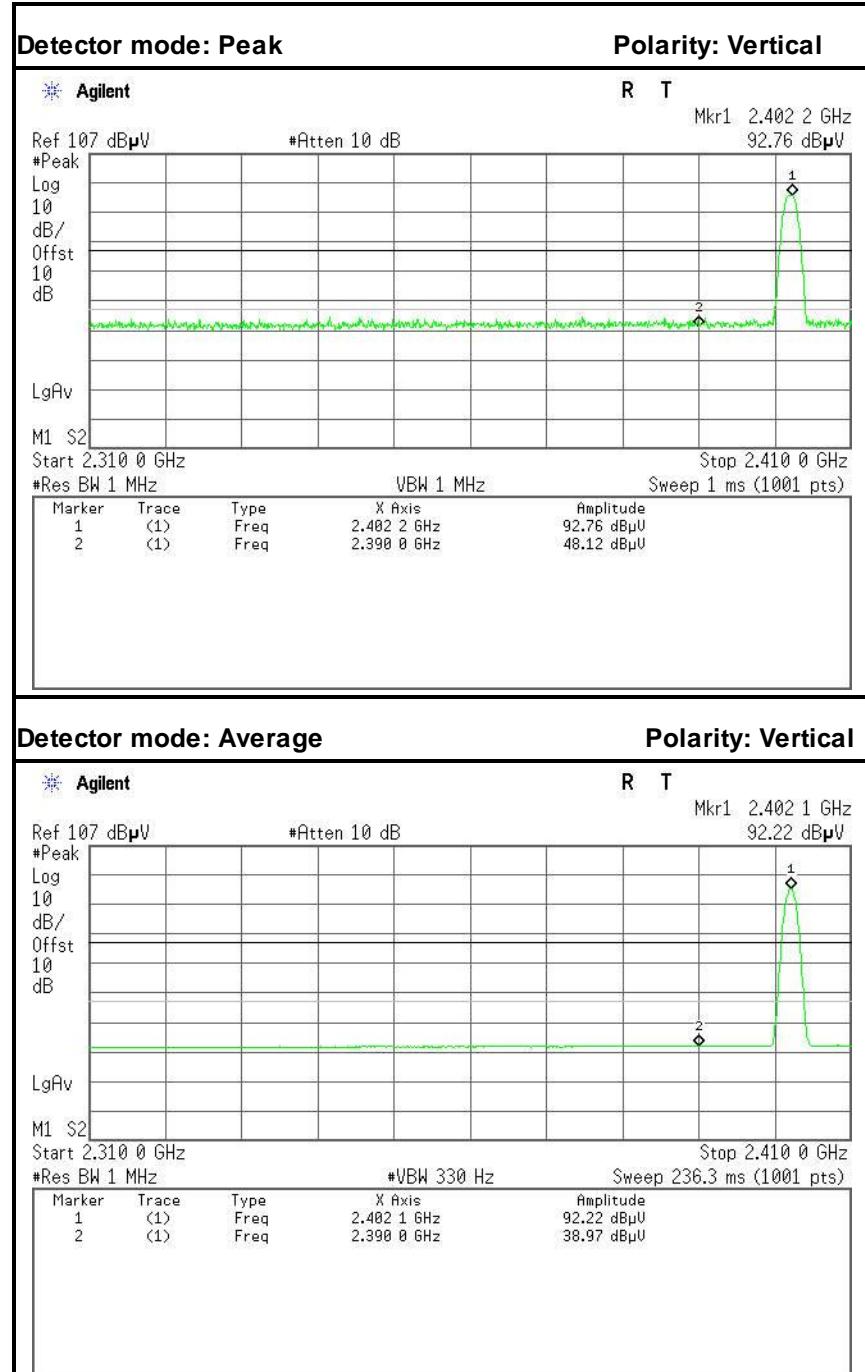


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	41.52	-6.60	48.12	74.00	-25.88	Peak	Vertical
2	2390.0000	32.37	-6.60	38.97	54.00	-15.03	Average	Vertical

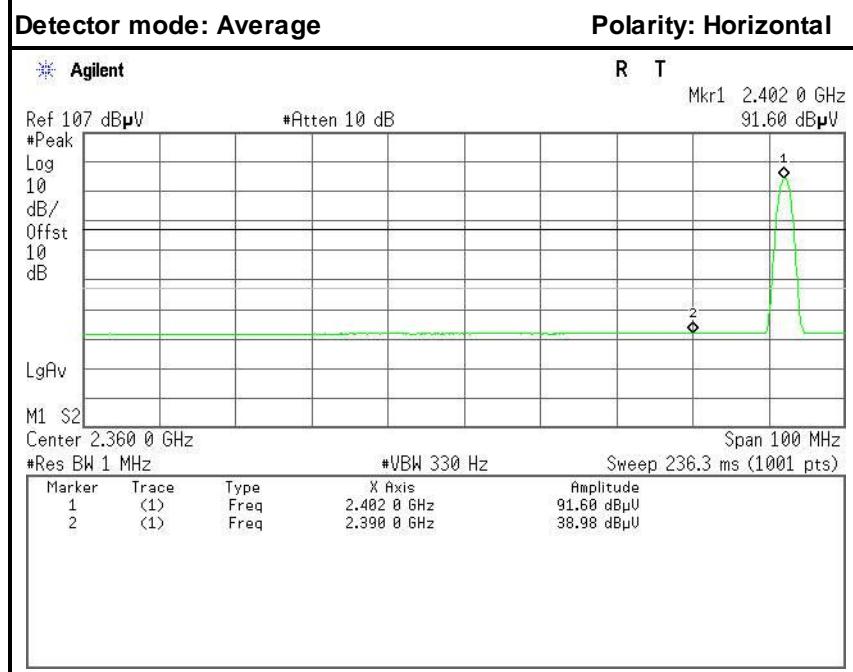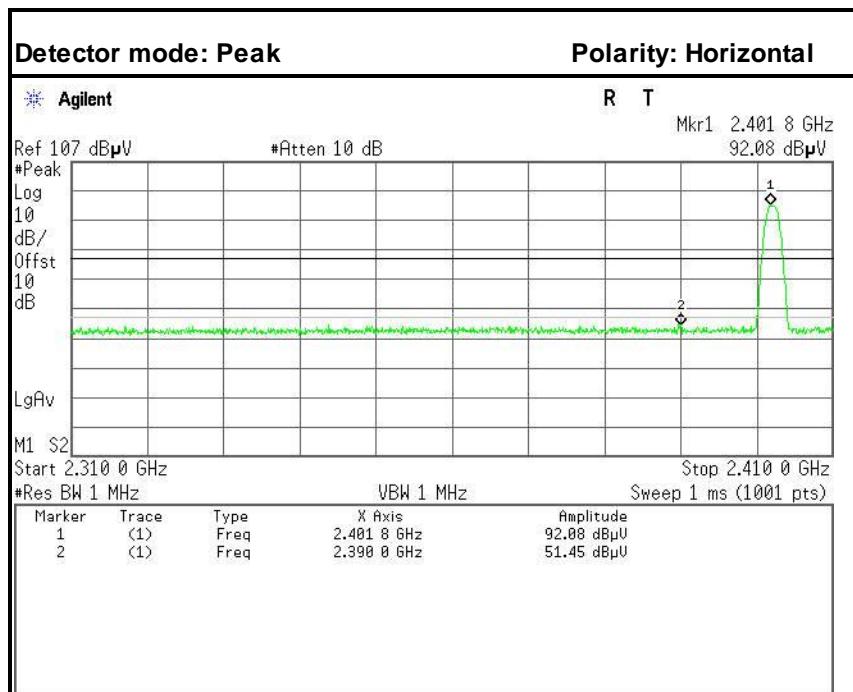



No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	44.85	-6.60	51.45	74.00	-22.55	Peak	Horizontal
2	2390.0000	32.38	-6.60	38.98	54.00	-15.02	Average	Horizontal




## Band Edges (CH-High)

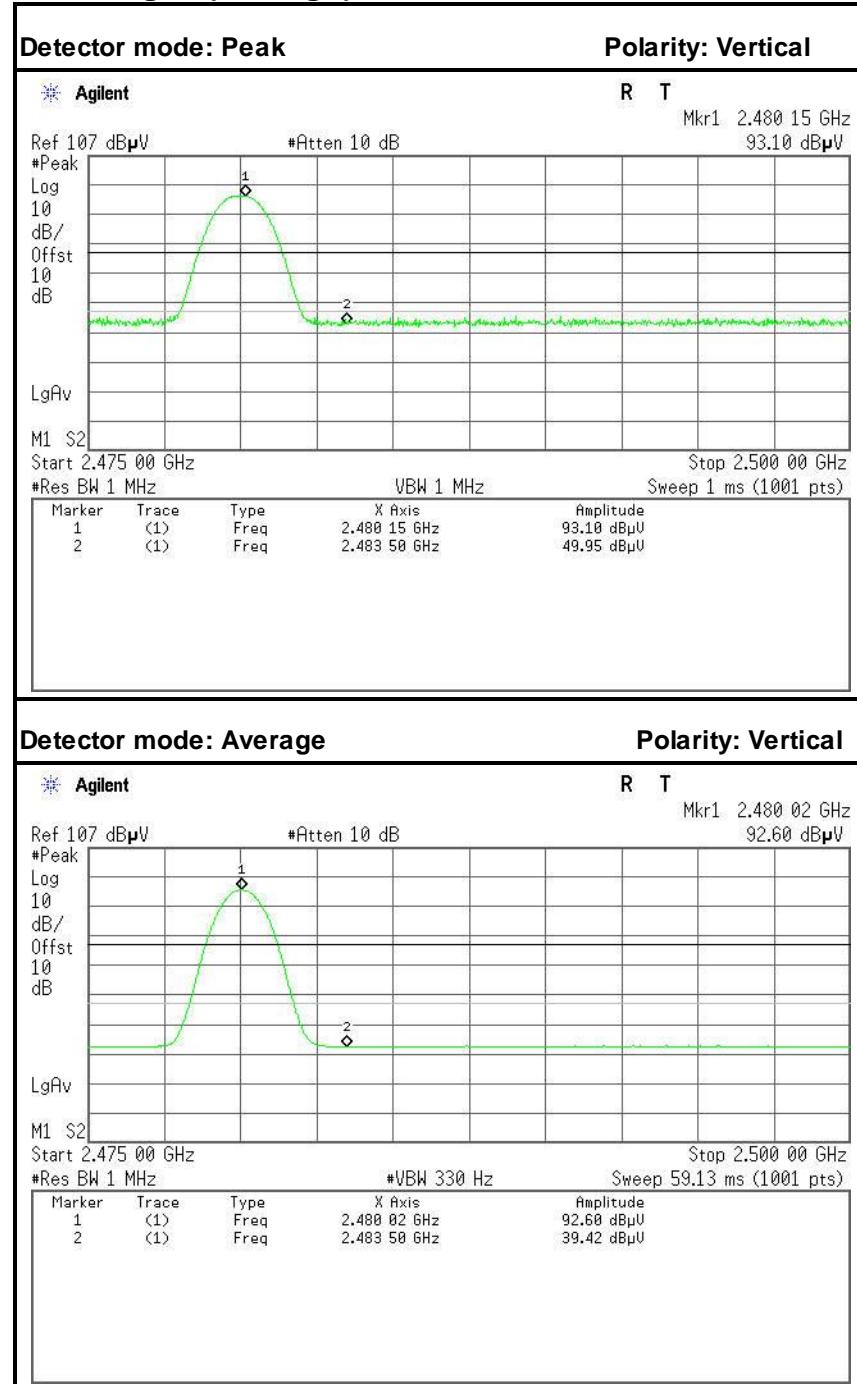



No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	43.71	-6.24	49.95	74.00	-24.05	Peak	Vertical
2	2483.5000	33.18	-6.24	39.42	54.00	-14.58	Average	Vertical

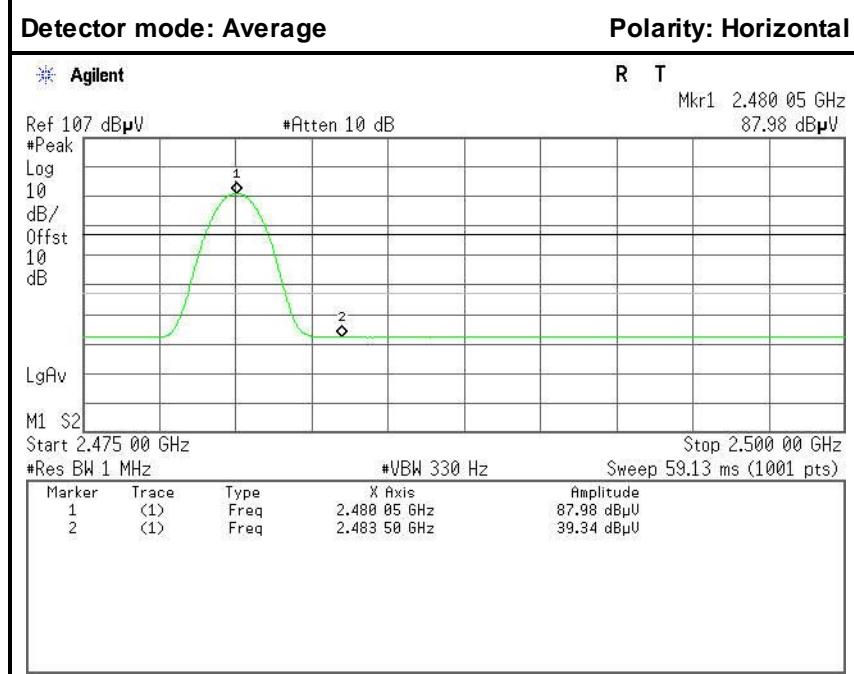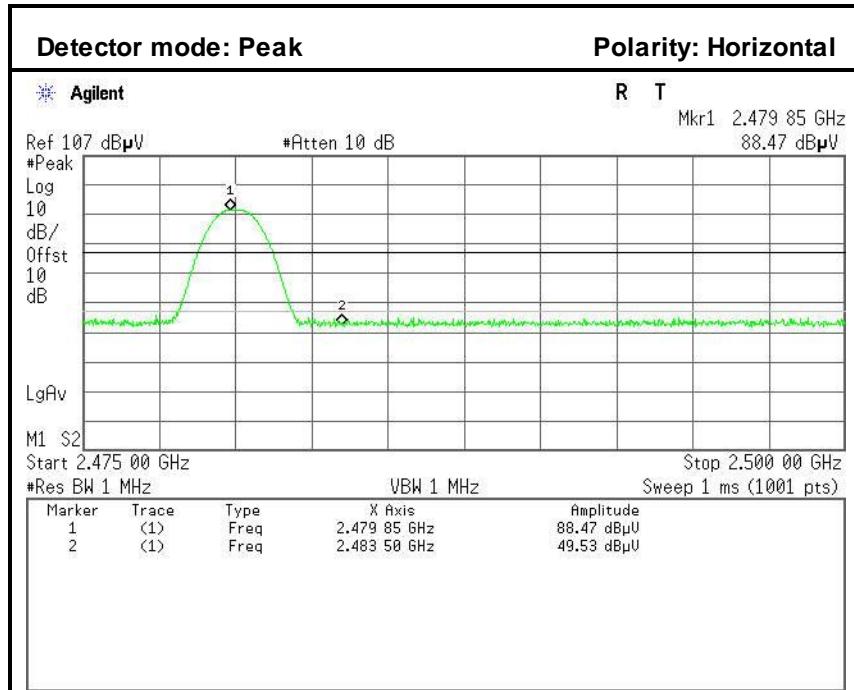


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	43.29	-6.24	49.53	74.00	-24.47	Peak	Horizontal
2	2483.5000	33.10	-6.24	39.34	54.00	-14.66	Average	Horizontal

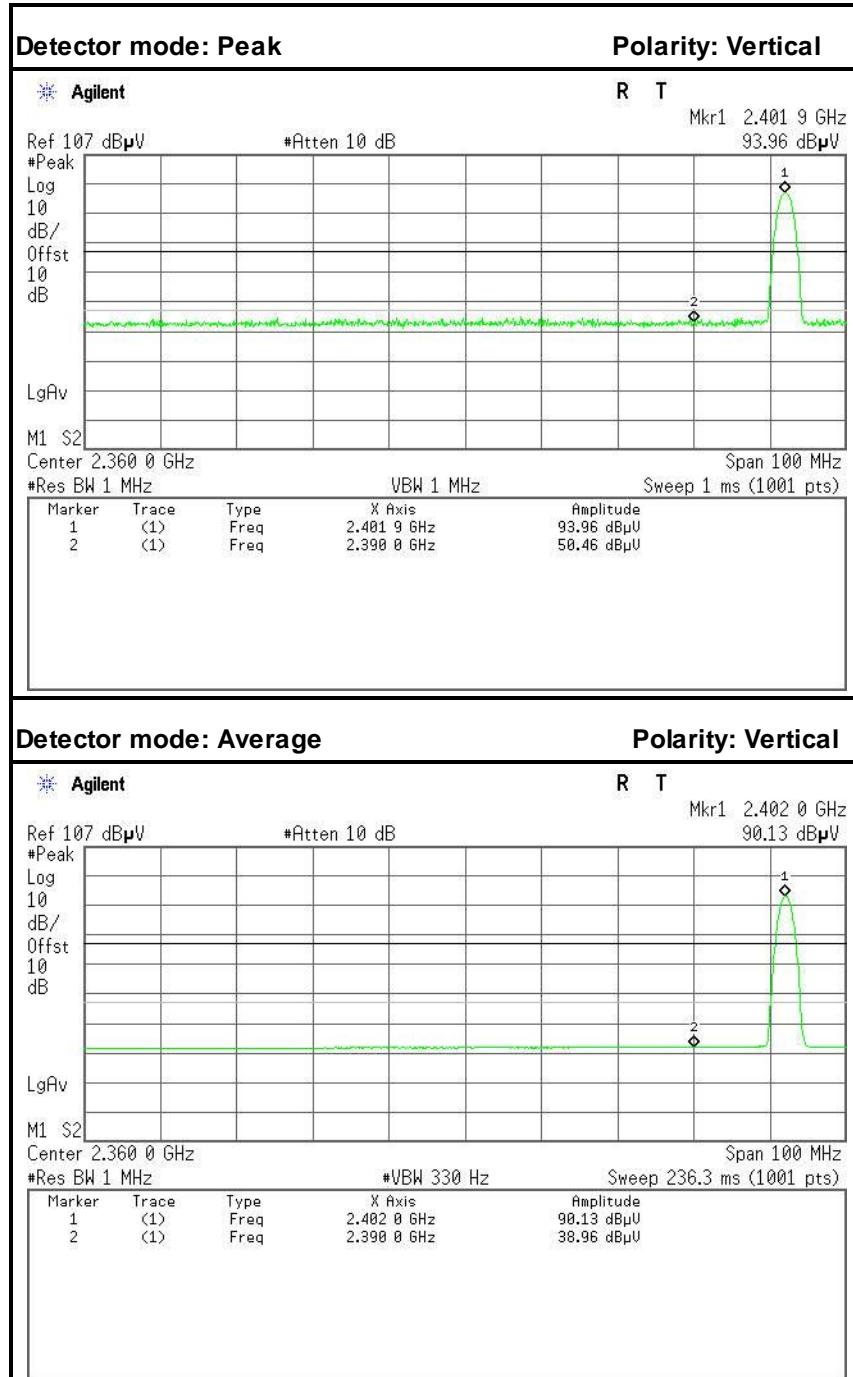**8DPSK****Band Edges (CH-Low)**



No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	43.86	-6.60	50.46	74.00	-23.54	Peak	Vertical
2	2390.0000	32.36	-6.60	38.96	54.00	-15.04	Average	Vertical

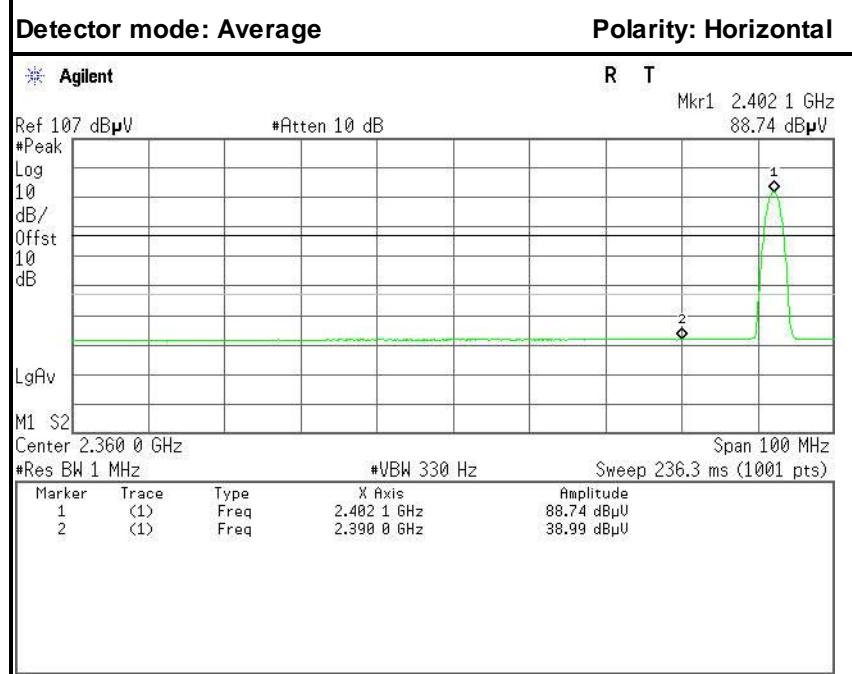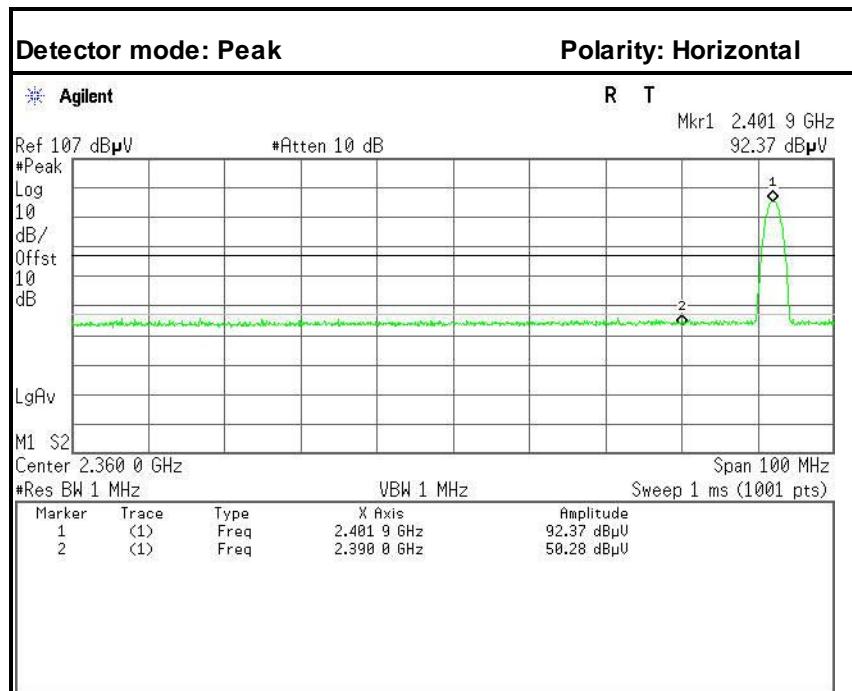

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	43.68	-6.60	50.28	74.00	-23.72	Peak	Horizontal
2	2390.0000	32.39	-6.60	38.99	54.00	-15.01	Average	Horizontal

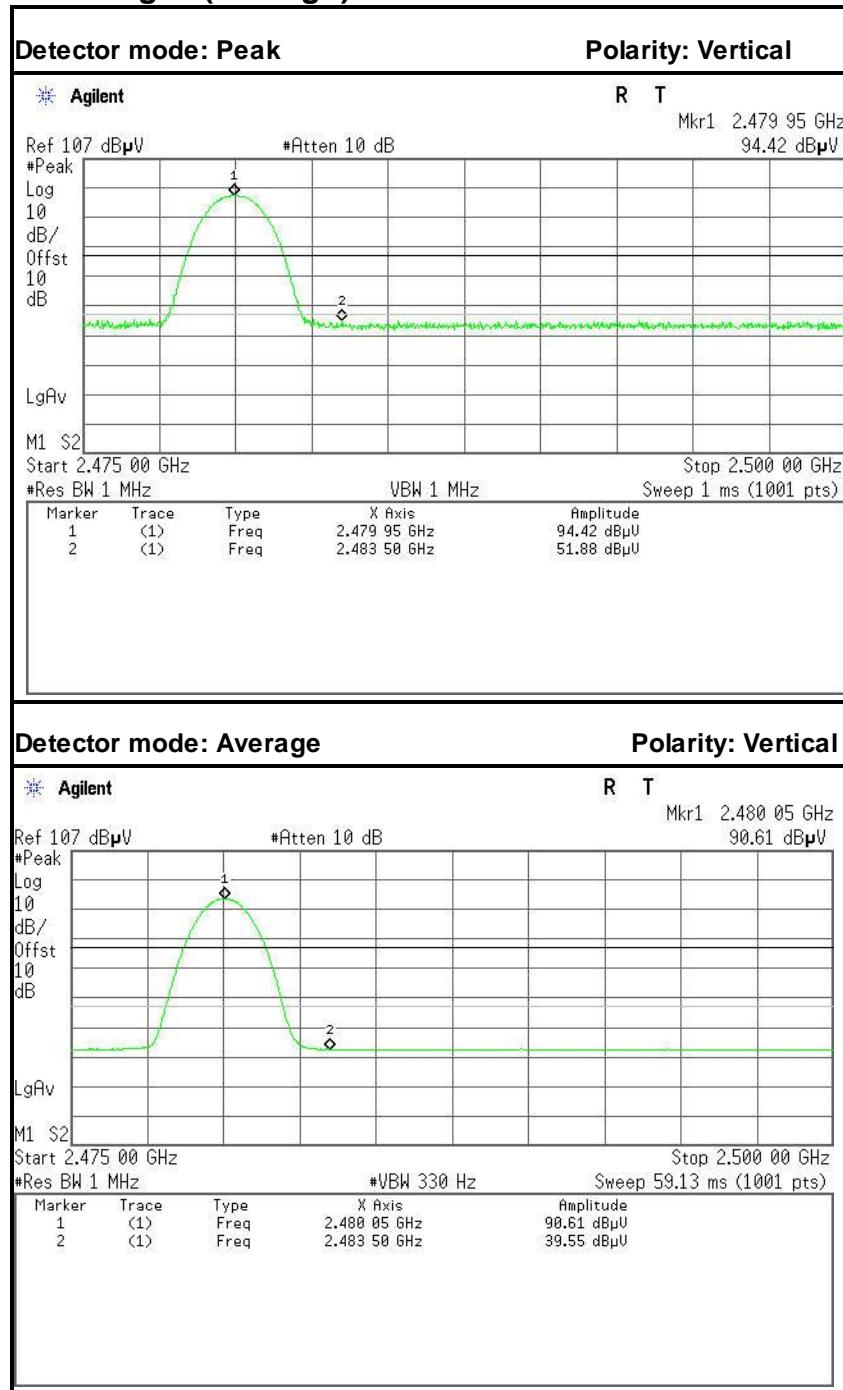**Band Edges (CH-High)**

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	45.64	-6.24	51.88	74.00	-22.12	Peak	Vertical
2	2483.5000	33.31	-6.24	39.55	54.00	-14.45	Average	Vertical

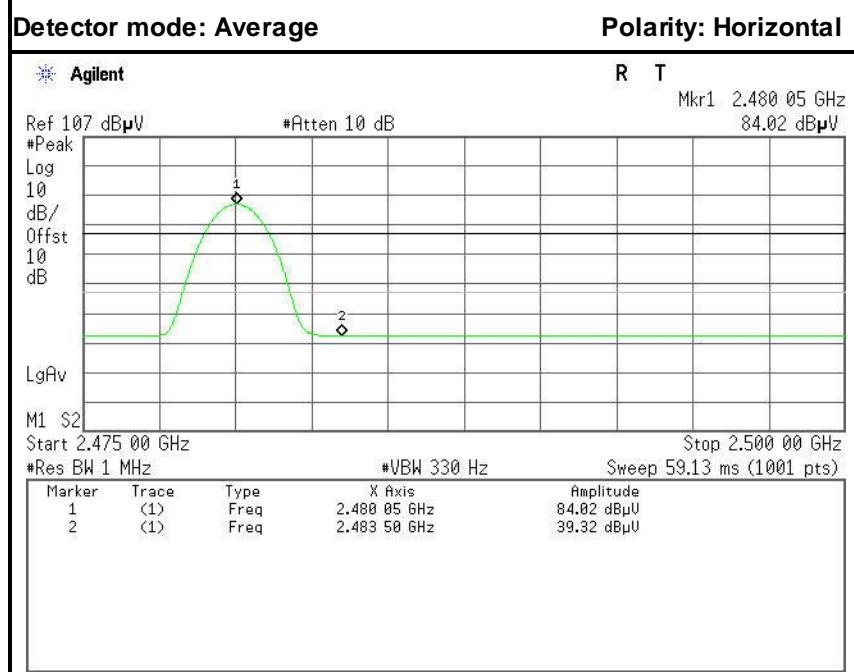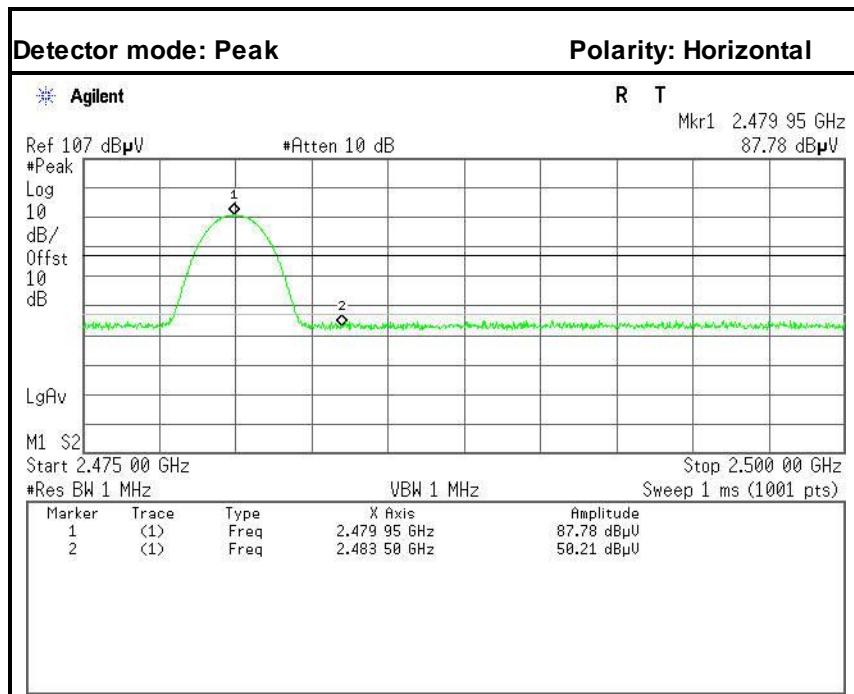

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	43.97	-6.24	50.21	74.00	-23.79	Peak	Horizontal
2	2483.5000	33.08	-6.24	39.32	54.00	-14.68	Average	Horizontal



## 6.6 FREQUENCY SEPARATION

### LIMIT


According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### **MEASUREMENT EQUIPMENT USED**

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	02/28/2015	02/27/2016

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### Test Configuration

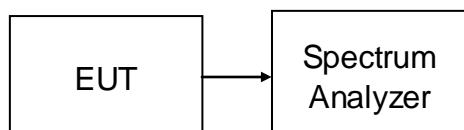

### **TEST PROCEDURE**

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW=30kHz, VBW=30kHz, Adjust Span to 4 MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

### **TEST RESULTS**

No non-compliance noted

### Test Data

#### **GFSK**

Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	690.667	> Two-thirds of the 20 dB Bandwidth	Pass

#### **8DPSK**


Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	872.000	> Two-thirds of the 20 dB Bandwidth	Pass




## GFSK

### Test Plot

#### Measurement of Channel Separation

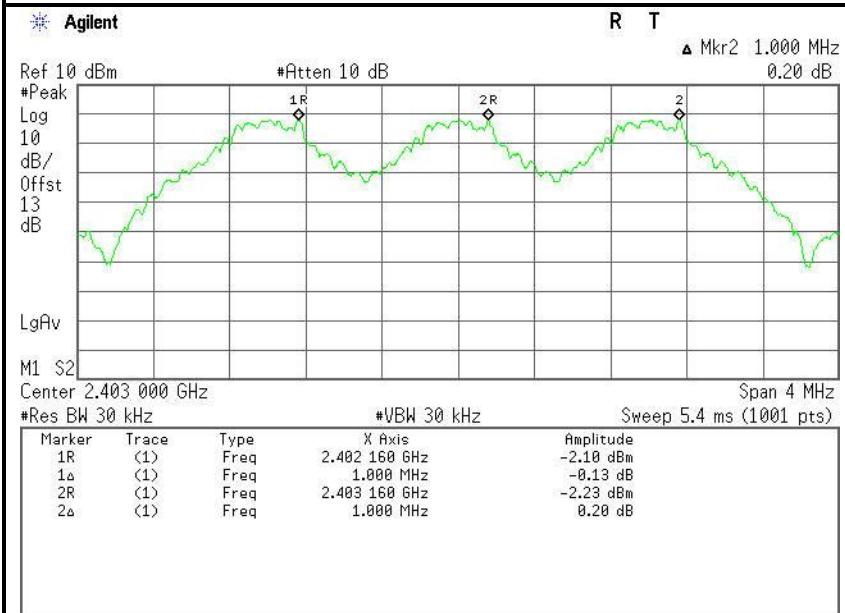

#### 20 dB bandwidth(CH High)

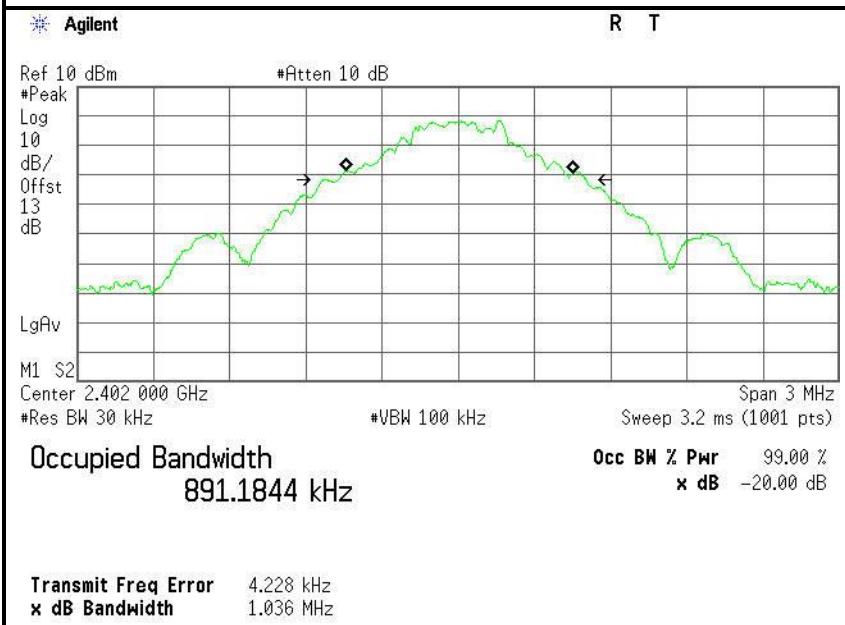





## 8DPSK

## Test Plot

## Measurement of Channel Separation

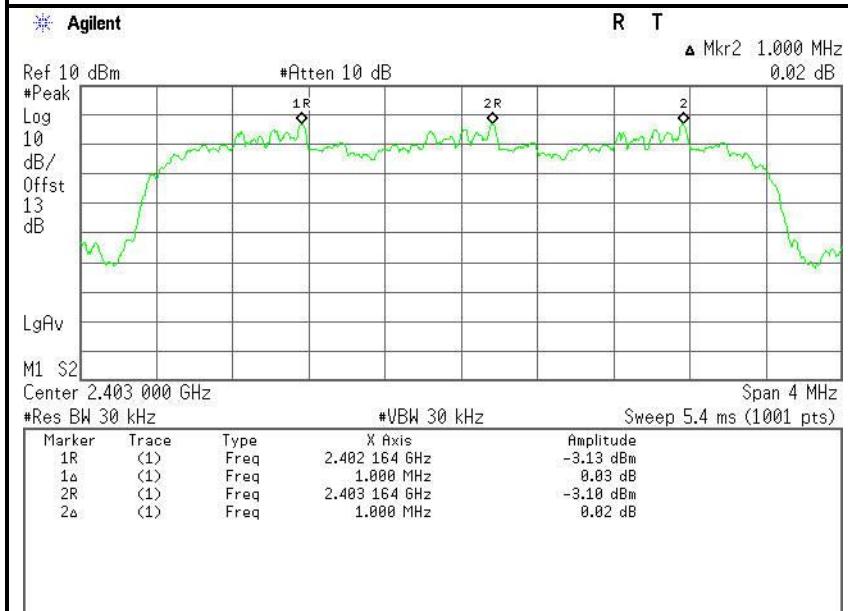

## 20 dB bandwidth(CH High)

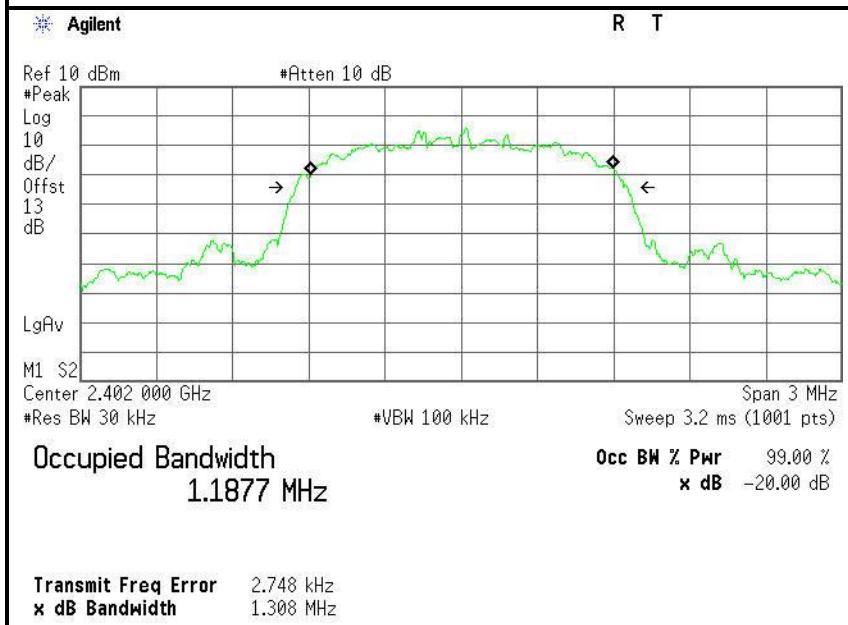



## 6.7 NUMBER OF HOPPING FREQUENCY

### LIMIT


According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	02/28/2015	02/27/2016

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### Test Configuration

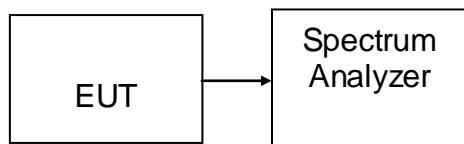

### TEST PROCEDURE


1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = 1ms.
4. Set the spectrum analyzer as RBW, VBW=300kHz,
5. Max hold, view and count how many channel in the band.

### TEST RESULTS

No non-compliance noted

### Test Data

Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS

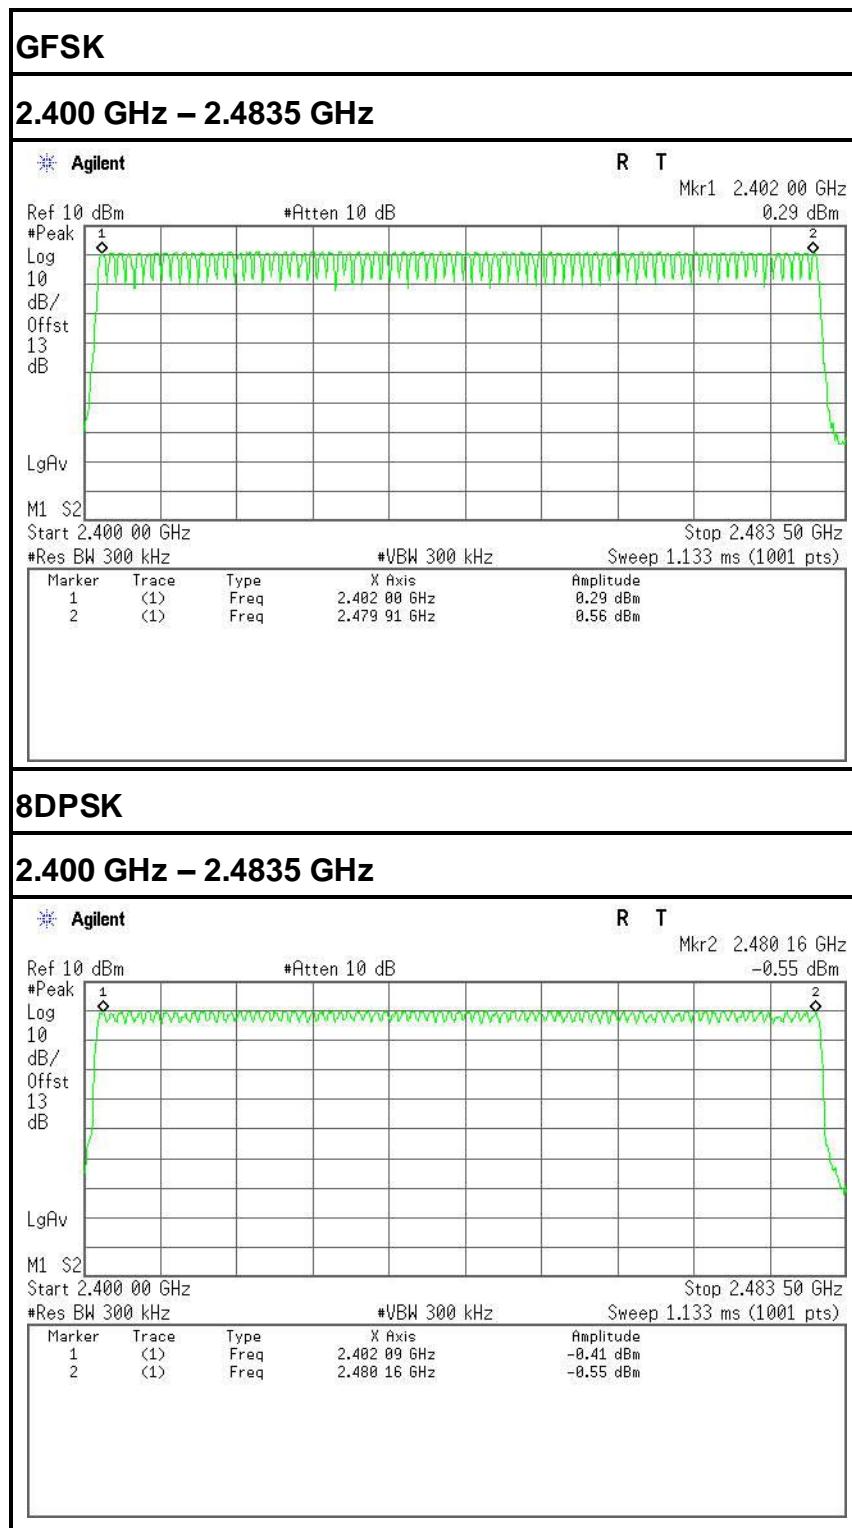**Test Plot****Channel Number**



## 6.8 TIME OF OCCUPANCY (DWELL TIME)

### LIMIT


According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4s multiplied by the number of hopping channels employed.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	02/28/2015	02/27/2016

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### Test Configuration

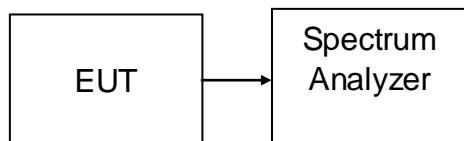

### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.



## TEST RESULTS

*No non-compliance noted*

### Test Data

#### GFSK

##### DH 1

CH Mid:  $0.386 * (1600/2)/79 * 31.6 = 123.520(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.386	123.520	31.60	400.00	PASS

##### DH 3

CH Mid:  $1.650 * (1600/4)/79 * 31.6 = 264.000 (\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.650	264.000	31.60	400.00	PASS

##### DH 5

CH Mid:  $2.904 * (1600/6)/79 * 31.6 = 309.760(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	2.904	309.760	31.60	400.00	PASS

**8DPSK****DH 1**CH Mid:  $0.392 * (1600/2)/79 * 31.6 = 125.440$  (ms)



CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.392	125.440	31.60	400.00	PASS


**DH 3**CH Mid:  $1.653 * (1600/4)/79 * 31.6 = 264.480$  (ms)


CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.653	264.480	31.60	400.00	PASS


**DH 5**CH Mid:  $2.908 * (1600/6)/79 * 31.6 = 310.187$  (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	2.908	310.187	31.60	400.00	PASS

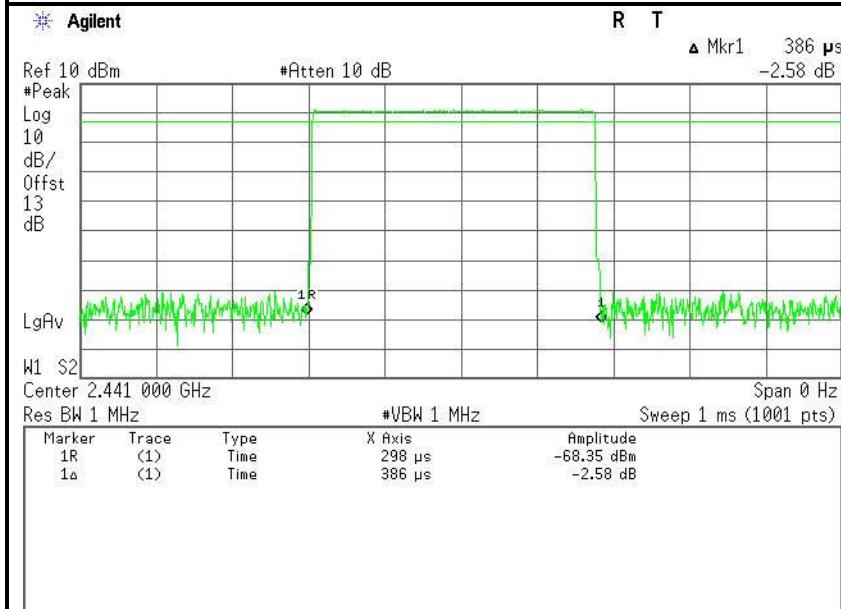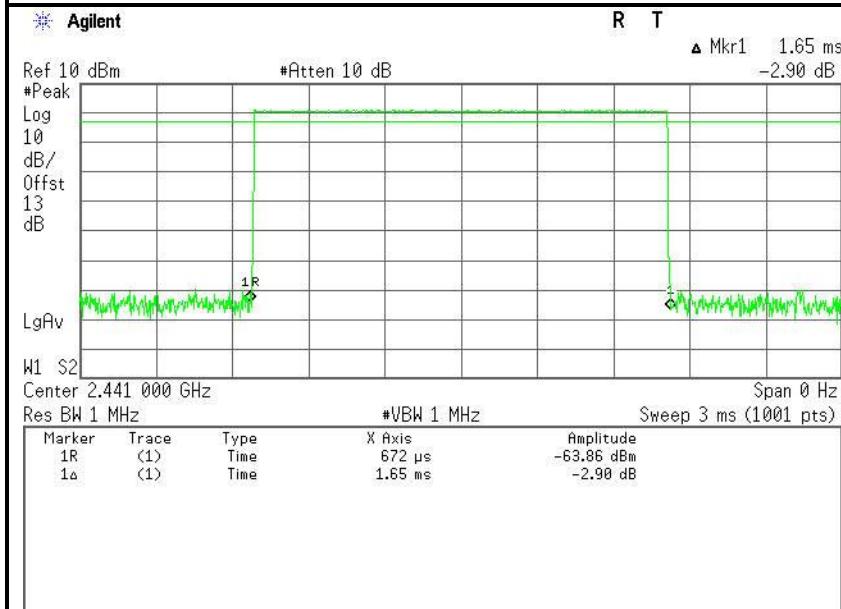**Test Plot****GFSK****DH 1****CH Mid****DH 3****CH Mid**

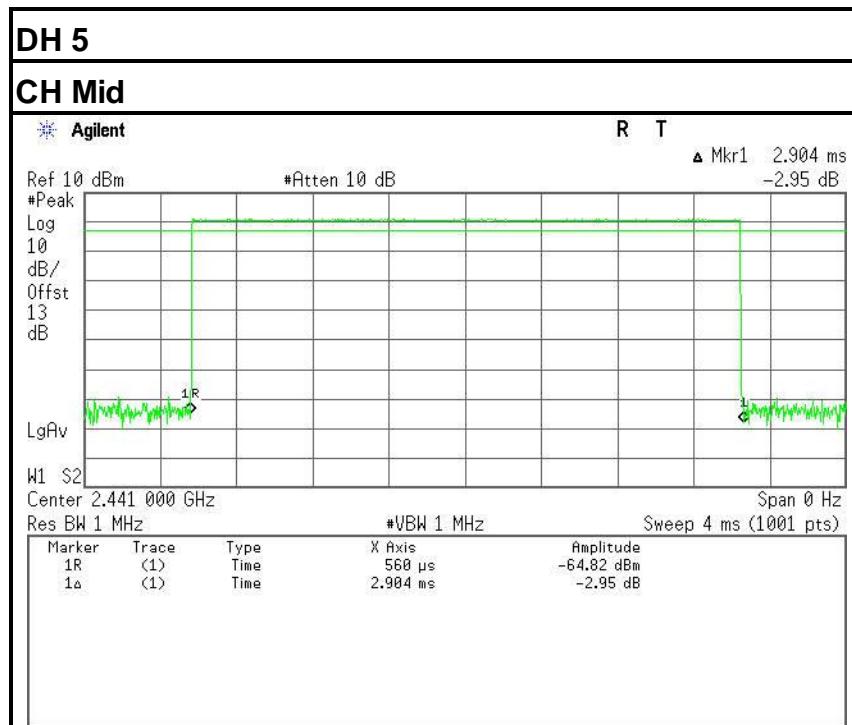

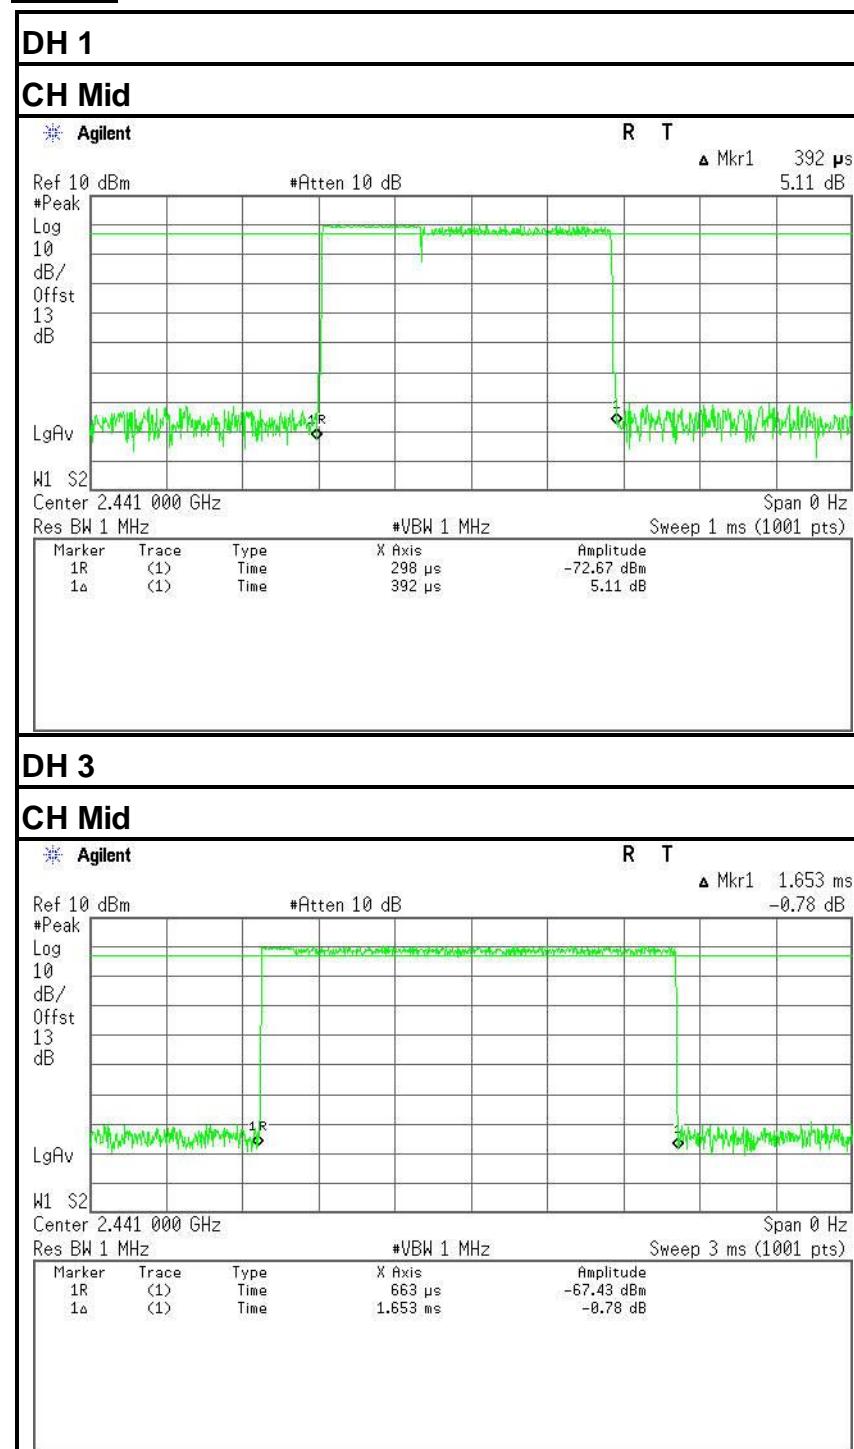**Test Plot****8DPSK**

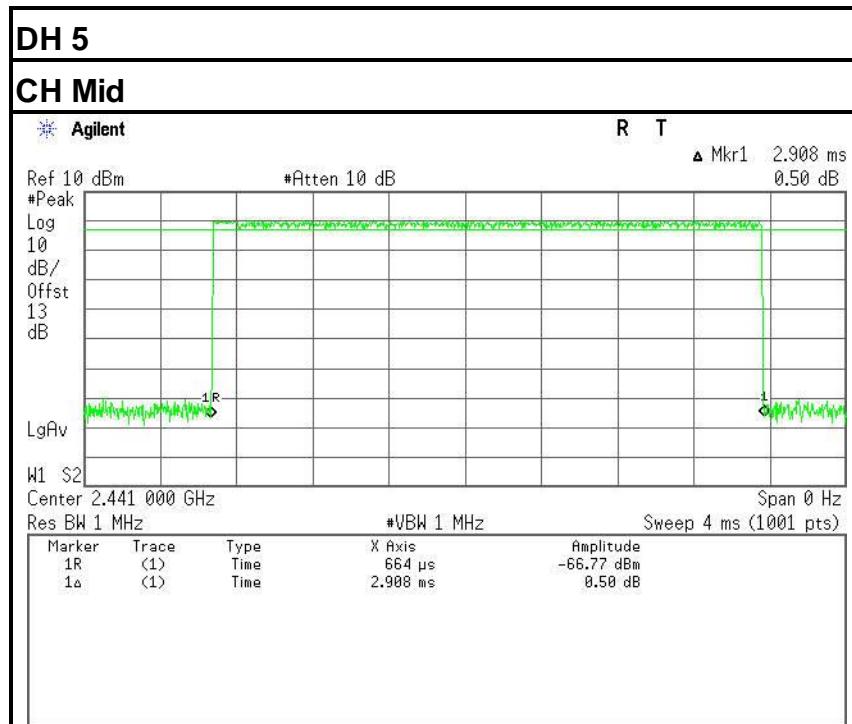



## 6.9 SPURIOUS EMISSIONS

### 6.9.1. CONDUCTED MEASUREMENT

#### LIMIT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

#### **MEASUREMENT EQUIPMENT USED**

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	02/28/2015	02/27/2016

**Remark:** Each piece of equipment is scheduled for calibration once a year.

#### Test Configuration

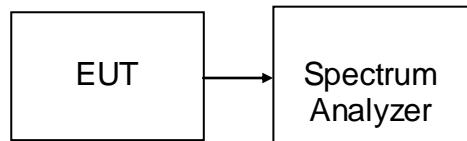

#### **TEST PROCEDURE**

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 10MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels, and highest channels. No emission found between lowest internal used/generated frequency to 10MHz, it is only recorded 10MHz to 26GHz.



#### **TEST RESULTS**


*No non-compliance noted*



**Remark:** The hopping on mode and hopping off mode were chosen for pre-test and the hopping off mode was the worse case and print in the report.



**Test Plot ( GFSK )**

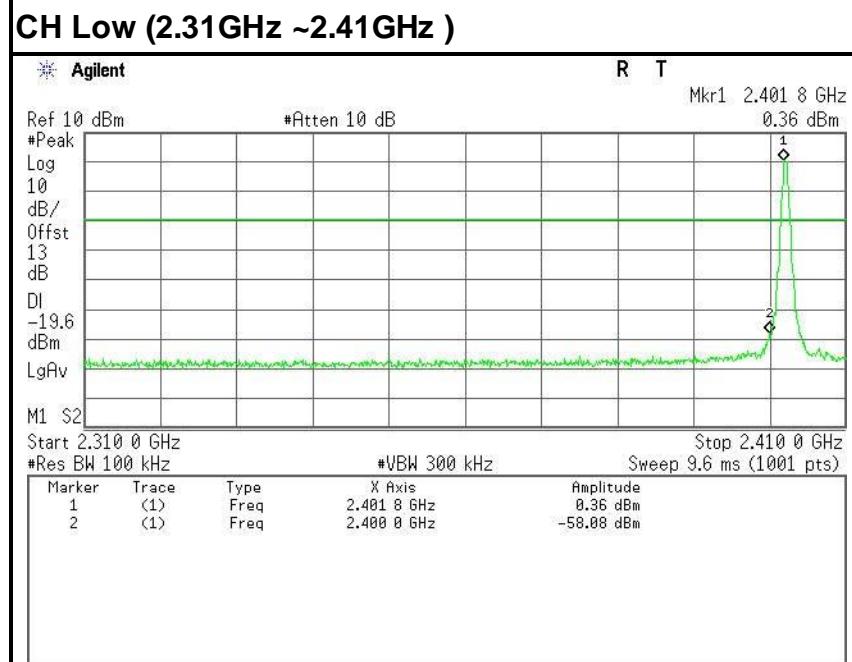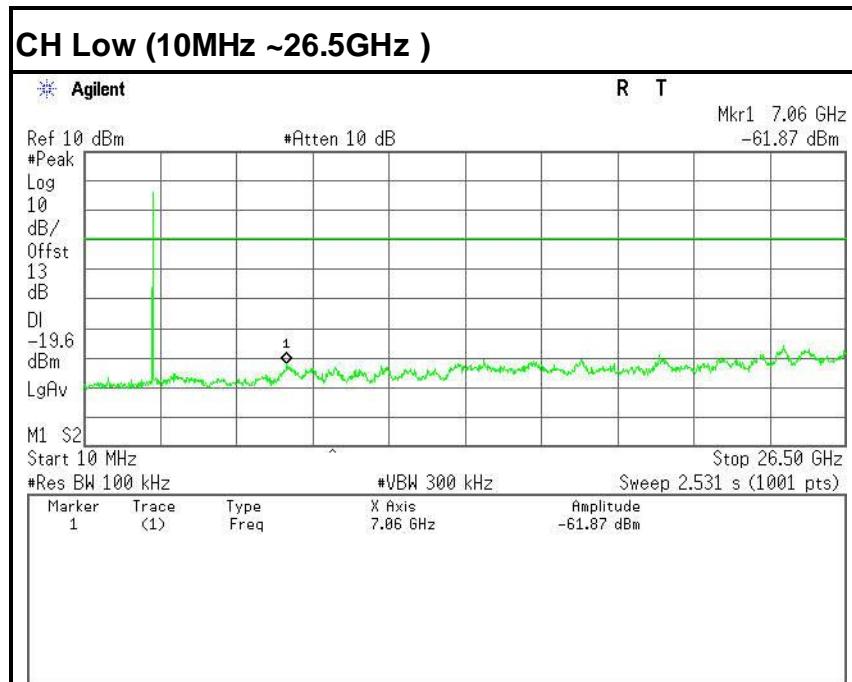


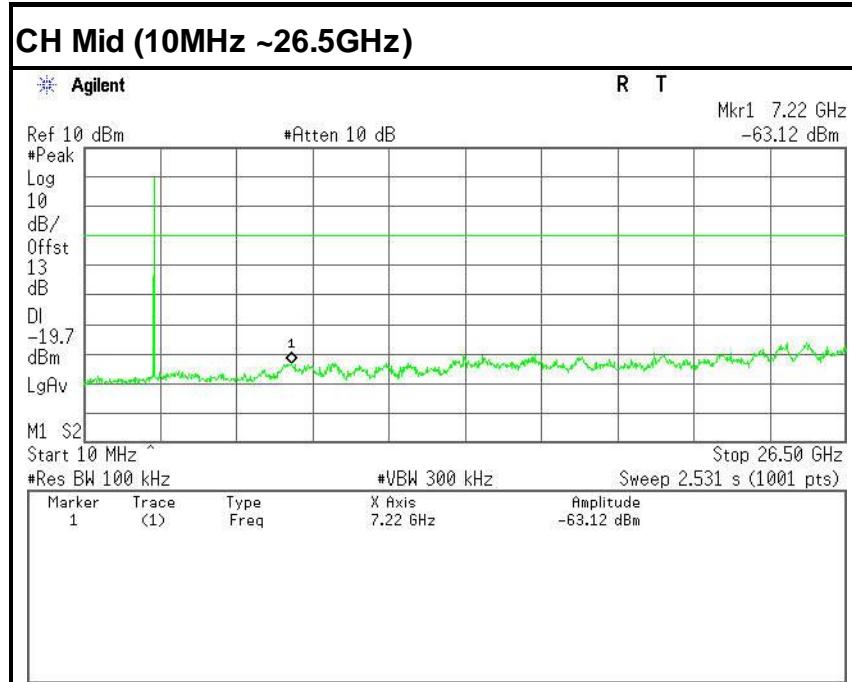

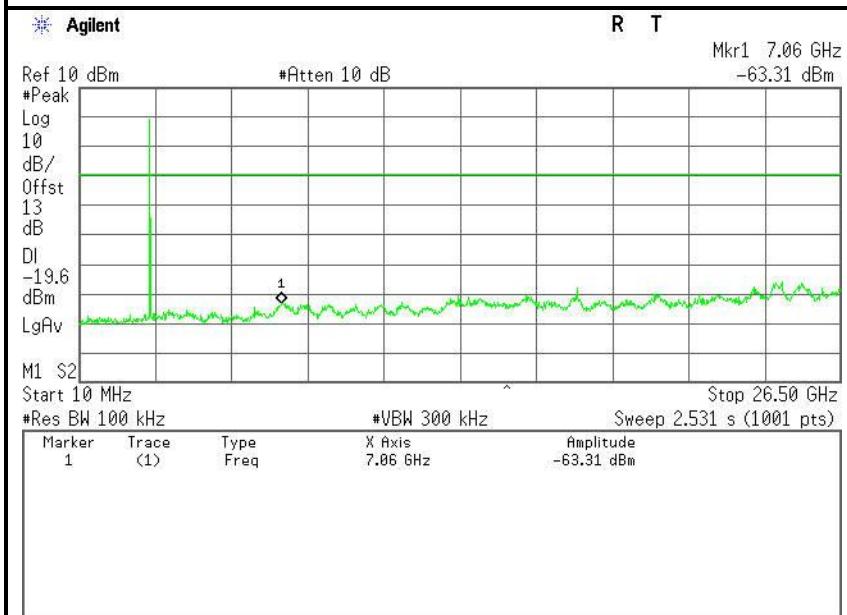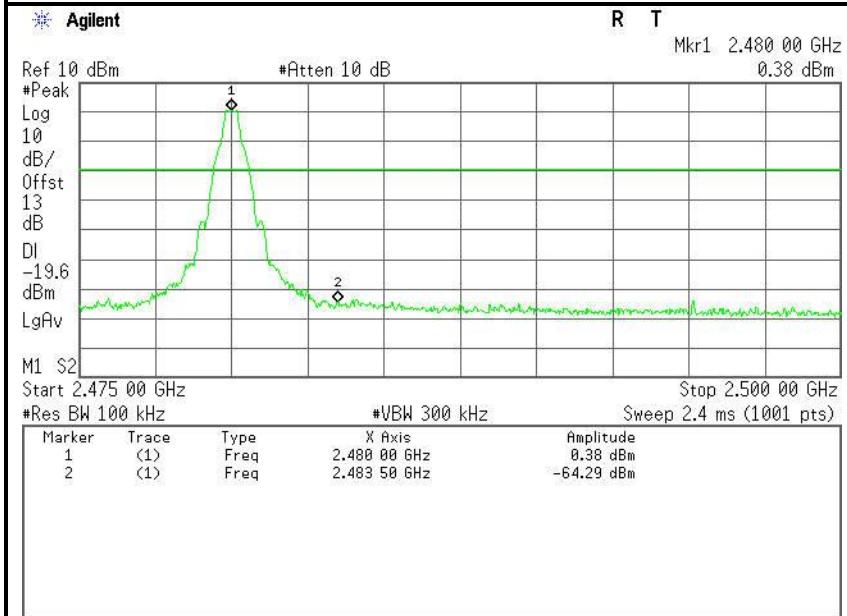
**CH High (10MHz ~26.5GHz)****CH High (2.475GHz ~ 2.5GHz)**






**Test Plot (8DPSK )**

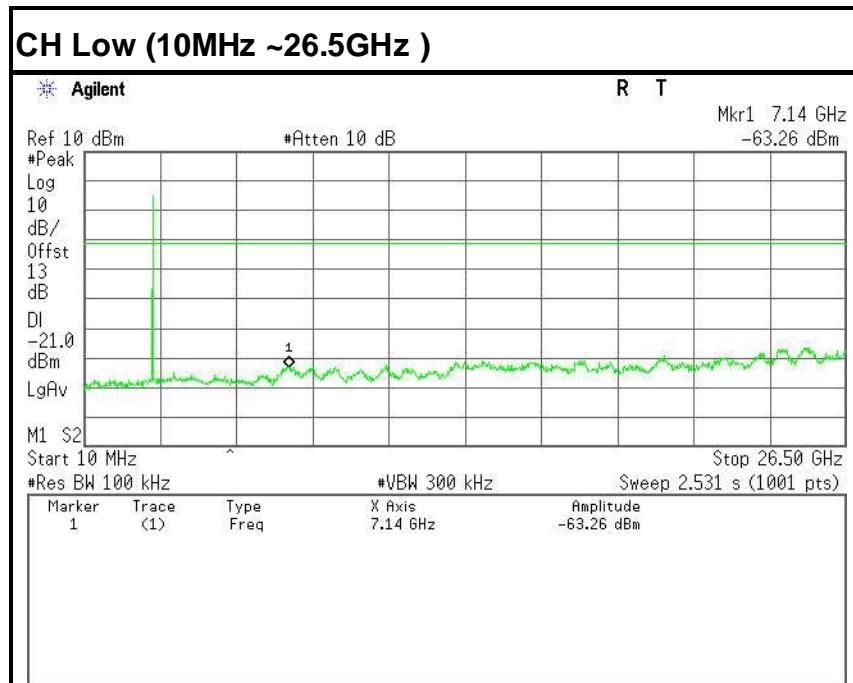

**CH Low (2.31GHz ~2.41GHz )**

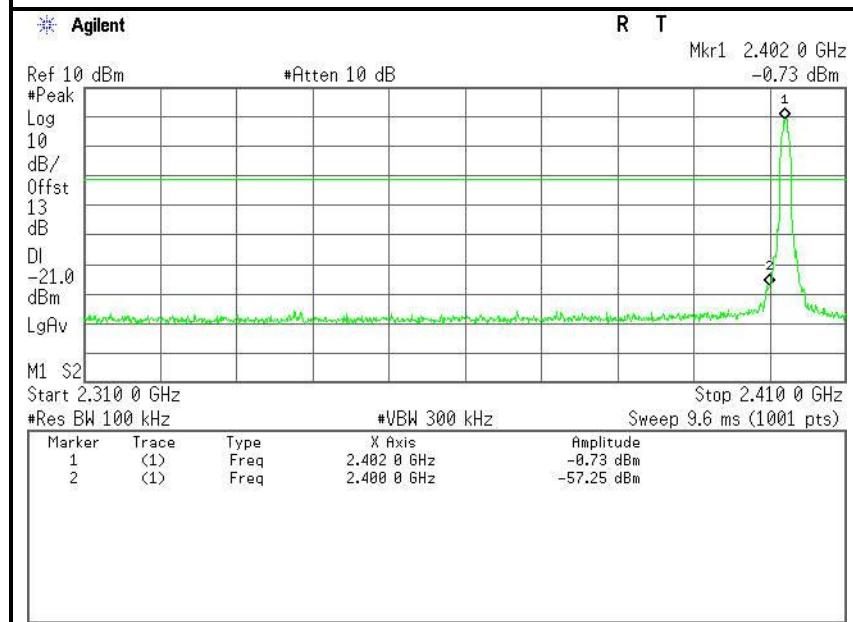

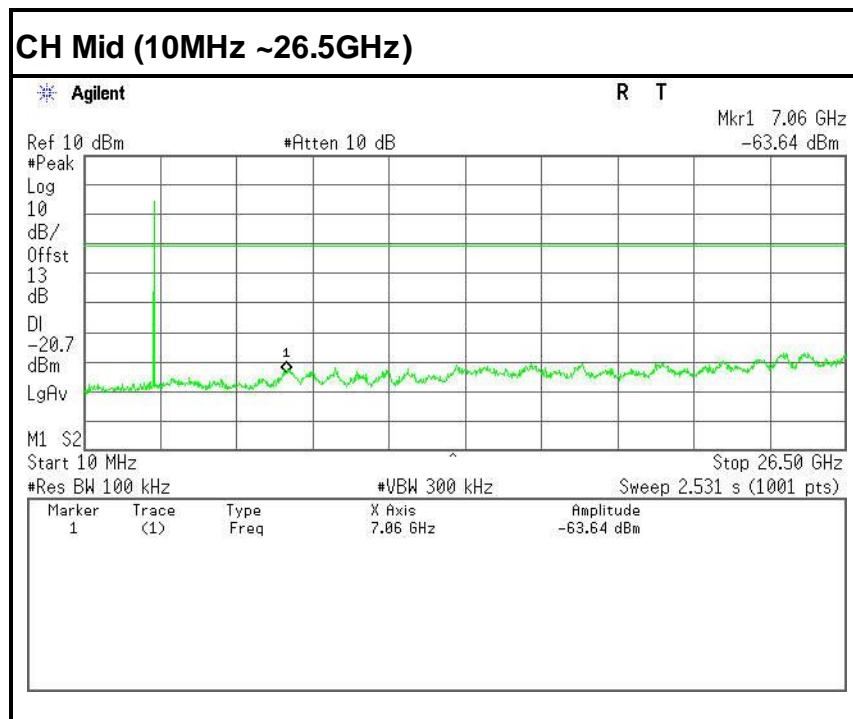

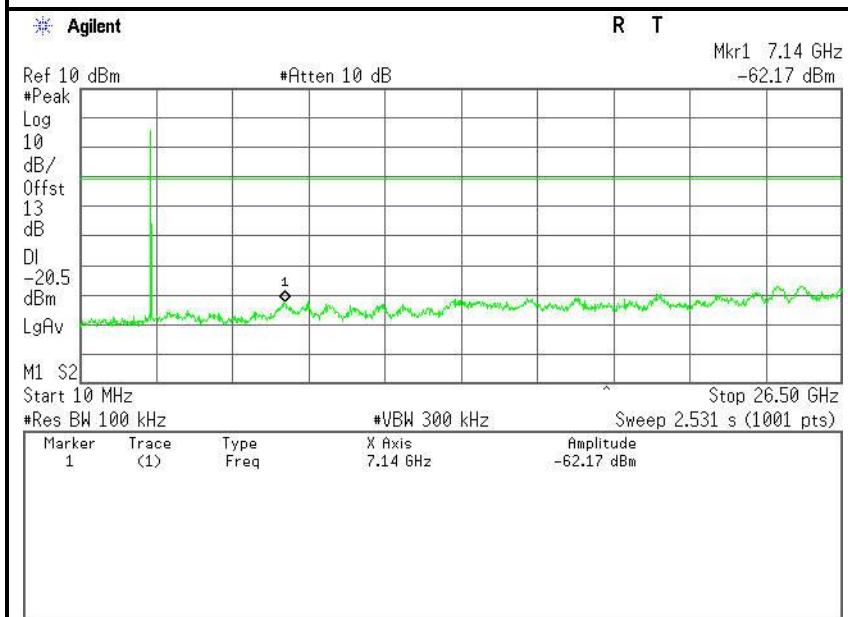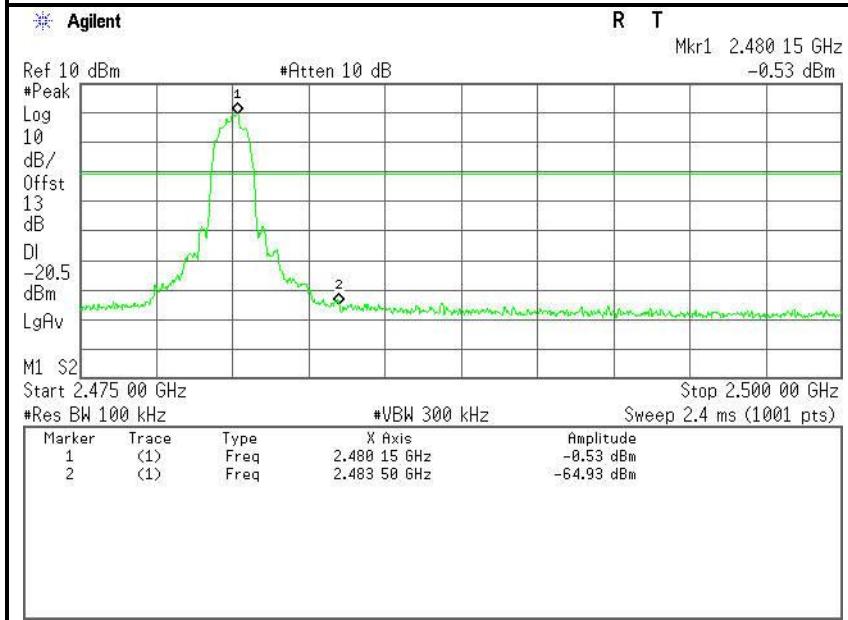**CH High (10MHz ~26.5GHz)****CH High (2.475GHz ~ 2.5GHz)**



## 6.9.2. Radiated Emissions

### LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

**Note:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


## MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	02/28/2015	02/27/2016
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/28/2015	02/27/2016
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2015	03/18/2016
High Noise Amplifier	Agilent	8449B	3008A01838	02/28/2015	02/27/2016
Board-Band Hom Antenna	Schwarzbeck	BBHA 9170	9170-497	02/28/2015	02/27/2016
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/28/2015	02/27/2016
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/28/2015	02/27/2016
Loop Antenna	A. R. A	PLA-1030/B	1029	09/25/2014	09/24/2015
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2015	02/27/2016
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD		LZ-RF / CCS-SZ-3A2		


**Remark:** Each piece of equipment is scheduled for calibration once a year.

## Test Configuration


### Below 30MHz

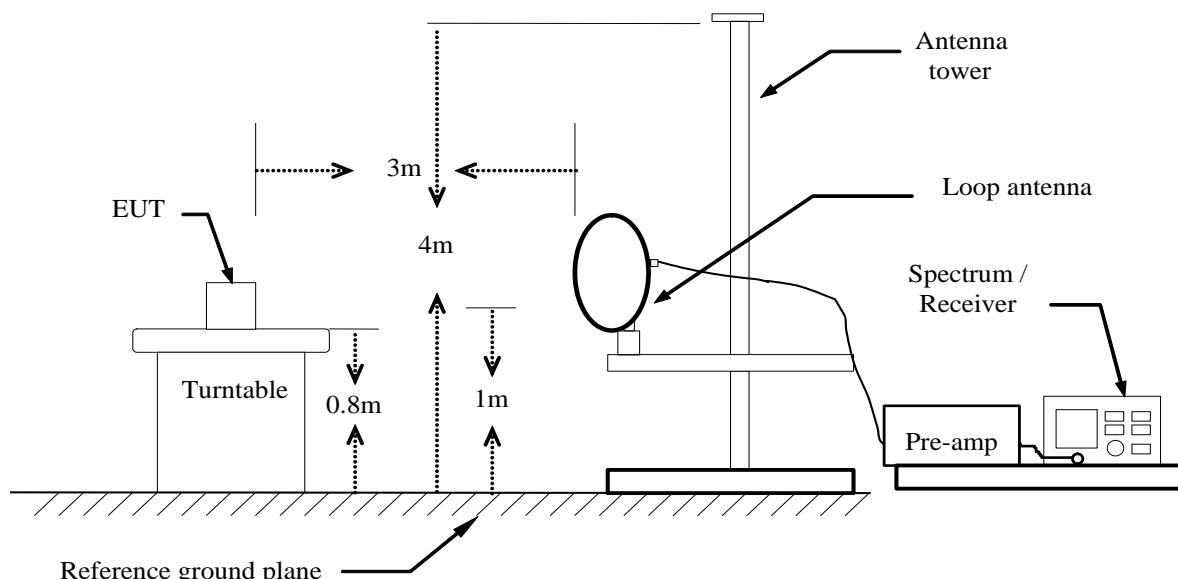

### Below 1 GHz

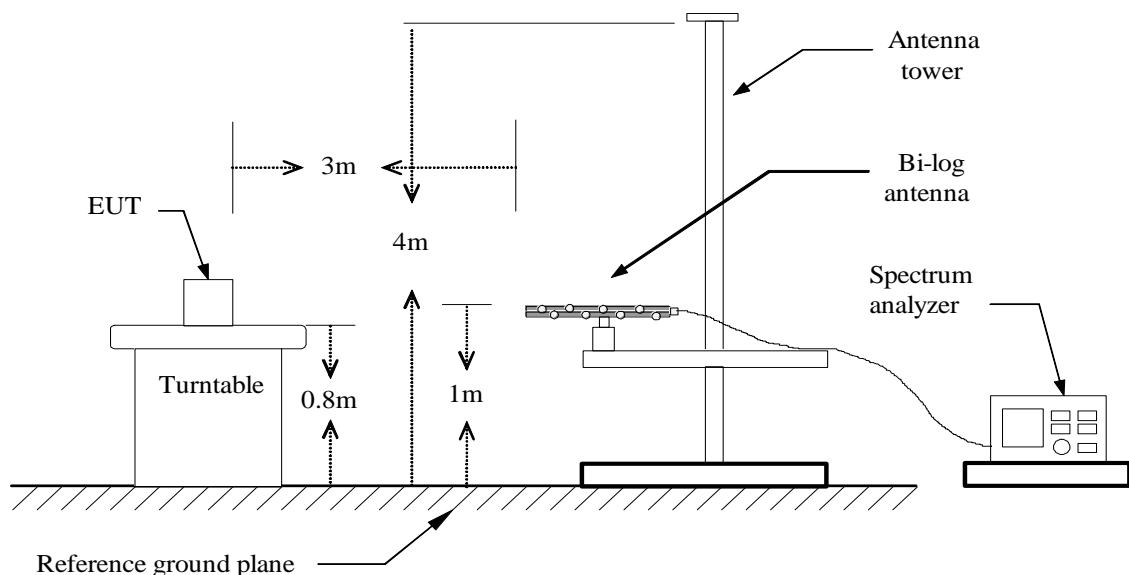

### Above 1 GHz

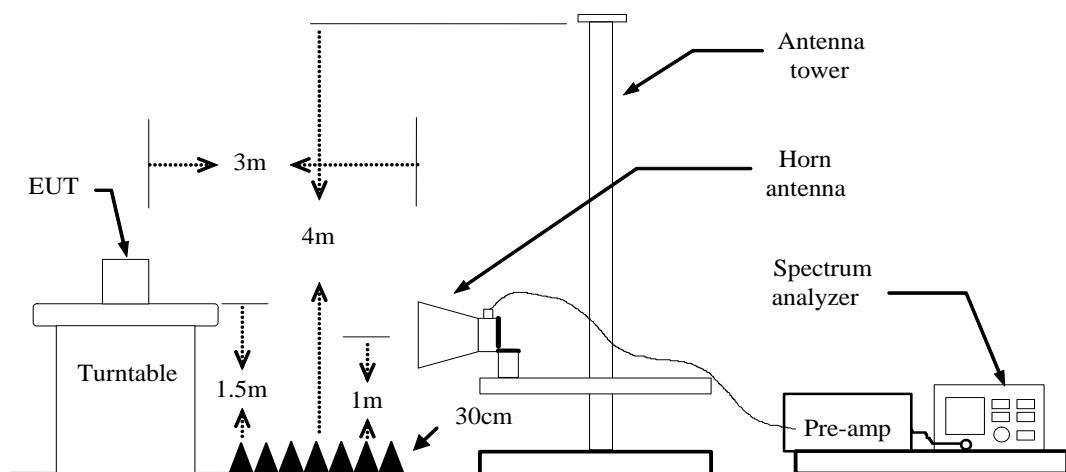



## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m or 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.



## TEST RESULTS

### Below 1 GHz

Test Mode: TX

Tested by: Eve Wang

Ambient temperature: 24°C Relative humidity: 52% RH

Date: August 25, 2015

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
365.6200	49.59	-17.30	32.29	46.00	-13.71	V	QP
490.7500	50.59	-14.36	36.23	46.00	-9.77	V	QP
631.4000	48.81	-12.50	36.31	46.00	-9.69	V	QP
776.9000	49.29	-11.19	38.10	46.00	-7.90	V	QP
817.6400	49.16	-10.48	38.68	46.00	-7.32	V	QP
951.5000	50.03	-9.20	40.83	46.00	-5.17	V	QP
301.6000	48.65	-19.51	29.14	46.00	-16.86	H	QP
454.8600	49.27	-15.32	33.95	46.00	-12.05	H	QP
632.3700	49.06	-12.49	36.57	46.00	-9.43	H	QP
671.1700	49.94	-12.16	37.78	46.00	-8.22	H	QP
742.9500	49.10	-11.30	37.80	46.00	-8.20	H	QP
867.1100	49.84	-10.40	39.44	46.00	-6.56	H	QP

**\*\*Remark:** No emission found between lowest internal used/generated frequency to 30MHz.

**Notes:**

1. Measuring frequencies from 9kHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Peak/Quasi-peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 120kHz.
5. Frequency (MHz) = Emission frequency in MHz  
Reading (dBuV) = Receiver reading  
Correction Factor(dB/m) = Antenna factor + Cable loss – Amplifier gain  
Actual FS (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)  
Limit (dBuV/m) = Limit stated in standard  
Margin(dB) = Measured (dBuV/m) – Limits (dBuV/m)  
Antenna Pole(V/H) = Current carrying line of reading

**Above 1 GHz****GFSK****Test Mode:** TX(CH Low)**Tested by:** Eve Wang**Ambient temperature:** 24°C    **Relative humidity:** 52% RH    **Date:** August 25, 2015

Frequency (MHz)	Reading (dB $\mu$ V)	Correction Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2584.000	44.78	-2.11	42.67	74.00	-31.33	V	peak
3169.000	43.83	-1.08	42.75	74.00	-31.25	V	peak
4537.000	42.22	3.47	45.69	74.00	-28.31	V	peak
4960.000	41.27	4.85	46.12	74.00	-27.88	V	peak
5923.000	41.05	6.05	47.10	74.00	-26.90	V	peak
6265.000	41.13	6.51	47.64	74.00	-26.36	V	peak
2809.000	44.65	-1.70	42.95	74.00	-31.05	H	Peak
3889.000	42.13	1.12	43.25	74.00	-30.75	H	Peak
4393.000	41.27	2.97	44.24	74.00	-29.76	H	Peak
5581.000	40.30	5.90	46.20	74.00	-27.80	H	peak
6157.000	40.28	6.33	46.61	74.00	-27.39	H	peak
7642.000	40.80	8.95	49.75	74.00	-24.25	H	peak

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = auto.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.

5. Frequency (MHz)

= Emission frequency in MHz

Reading (dB $\mu$ V/m)

= Uncorrected Analyzer / Receiver Reading

Correction Factor (dB)

= Antenna factor + Cable loss – Amplifier gain

Limit (dB $\mu$ V/m)

= Limit stated in standard

Margin (dB)

= Result (dB $\mu$ V/m) - Limit (dB $\mu$ V/m)

Pk

= Peak Reading

AV.

= Average Reading

Remark

= Mark Peak Reading or Average Reading

**Test Mode:** TX(CH Mid)**Tested by:** Eve Wang**Ambient temperature:** 24°C    **Relative humidity:** 52% RH    **Date:** August 25, 2015

Frequency (MHz)	Reading (dB $\mu$ V)	Correction Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2530.000	44.69	-2.21	42.48	74.00	-31.52	V	peak
3196.000	44.13	-1.03	43.10	74.00	-30.90	V	peak
3970.000	41.76	1.46	43.22	74.00	-30.78	V	peak
4609.000	40.79	3.71	44.50	74.00	-29.50	V	peak
5203.000	40.08	5.34	45.42	74.00	-28.58	V	peak
6661.000	40.46	7.15	47.61	74.00	-26.39	V	peak
<hr/>							
2557.000	45.72	-2.16	43.56	74.00	-30.44	H	Peak
3763.000	41.35	0.59	41.94	74.00	-32.06	H	Peak
4429.000	40.80	3.10	43.90	74.00	-30.10	H	Peak
5158.000	41.08	5.26	46.34	74.00	-27.66	H	peak
6166.000	40.55	6.35	46.90	74.00	-27.10	H	peak
7426.000	40.53	8.53	49.06	74.00	-24.94	H	peak

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = auto.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz  
Reading (dB $\mu$ V/m) = Uncorrected Analyzer / Receiver Reading  
Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain  
Limit (dB $\mu$ V/m) = Limit stated in standard  
Margin (dB) = Result (dB $\mu$ V/m)- Limit (dB $\mu$ V/m)  
Pk = Peak Reading  
AV. = Average Reading  
Remark = Mark Peak Reading or Average Reading

**Test Mode:** TX(CH High)**Tested by:** Eve Wang**Ambient temperature:** 24°C    **Relative humidity:** 52% RH    **Date:** August 25, 2015

Frequency (MHz)	Reading (dB $\mu$ V)	Correction Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2530.000	44.94	-2.21	42.73	74.00	-31.27	V	peak
2809.000	45.28	-1.70	43.58	74.00	-30.42	V	peak
3997.000	42.07	1.58	43.65	74.00	-30.35	V	peak
4960.000	40.94	4.85	45.79	74.00	-28.21	V	peak
5590.000	41.36	5.91	47.27	74.00	-26.73	V	peak
6355.000	40.59	6.66	47.25	74.00	-26.75	V	peak
<hr/>							
2521.000	45.18	-2.22	42.96	74.00	-31.04	H	Peak
3493.000	42.29	-0.53	41.76	74.00	-32.24	H	Peak
4276.000	41.05	2.56	43.61	74.00	-30.39	H	Peak
4780.000	41.02	4.26	45.28	74.00	-28.72	H	peak
5482.000	40.50	5.84	46.34	74.00	-27.66	H	peak
5716.000	40.53	5.96	46.49	74.00	-27.51	H	peak

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = auto.
  - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz  
Reading (dB $\mu$ V/m) = Uncorrected Analyzer / Receiver Reading  
Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain  
Limit (dB $\mu$ V/m) = Limit stated in standard  
Margin (dB) = Result (dB $\mu$ V/m)- Limit (dB $\mu$ V/m)  
Pk = Peak Reading  
AV. = Average Reading  
Remark = Mark Peak Reading or Average Reading

**8DPSK****Test Mode:** TX(CH Low)**Tested by:** Eve Wang**Ambient temperature:** 24°C    **Relative humidity:** 52% RH**Date:** August 25, 2015

Frequency (MHz)	Reading (dB $\mu$ V)	Correction Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1765.000	52.02	-6.35	45.67	74.00	-28.33	V	peak
2530.000	44.45	-2.21	42.24	74.00	-31.76	V	peak
2827.000	43.89	-1.67	42.22	74.00	-31.78	V	peak
4609.000	41.25	3.71	44.96	74.00	-29.04	V	peak
5383.000	40.86	5.66	46.52	74.00	-27.48	V	peak
7120.000	40.45	7.93	48.38	74.00	-25.62	V	peak
<hr/>							
1783.000	49.85	-6.31	43.54	74.00	-30.46	H	Peak
2548.000	44.56	-2.17	42.39	74.00	-31.61	H	Peak
2827.000	44.01	-1.67	42.34	74.00	-31.66	H	Peak
3889.000	41.66	1.12	42.78	74.00	-31.22	H	peak
5437.000	40.38	5.76	46.14	74.00	-27.86	H	peak
7057.000	40.21	7.81	48.02	74.00	-25.98	H	peak

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = auto.
  - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz  
Reading (dB $\mu$ V/m) = Uncorrected Analyzer / Receiver Reading  
Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain  
Limit (dB $\mu$ V/m) = Limit stated in standard  
Margin (dB) = Result (dB $\mu$ V/m)- Limit (dB $\mu$ V/m)  
Pk = Peak Reading  
AV. = Average Reading  
Remark = Mark Peak Reading or Average Reading

**Test Mode:** TX(CH Mid)**Tested by:** Eve Wang**Ambient temperature:** 24°C    **Relative humidity:** 52% RH    **Date:** August 25, 2015

Frequency (MHz)	Reading (dB $\mu$ V)	Correction Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1765.000	48.67	-6.35	42.32	74.00	-31.68	V	peak
2548.000	45.18	-2.17	43.01	74.00	-30.99	V	peak
2836.000	43.84	-1.66	42.18	74.00	-31.82	V	peak
3835.000	41.30	0.89	42.19	74.00	-31.81	V	peak
5311.000	40.59	5.53	46.12	74.00	-27.88	V	peak
5590.000	40.92	5.91	46.83	74.00	-27.17	V	peak
2539.000	45.24	-2.19	43.05	74.00	-30.95	H	Peak
3151.000	43.15	-1.11	42.04	74.00	-31.96	H	Peak
3394.000	42.08	-0.70	41.38	74.00	-32.62	H	Peak
3898.000	42.87	1.16	44.03	74.00	-29.97	H	peak
4393.000	41.64	2.97	44.61	74.00	-29.39	H	peak
5554.000	40.22	5.89	46.11	74.00	-27.89	H	peak

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = auto.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
- Reading (dB $\mu$ V/m) = Uncorrected Analyzer / Receiver Reading
- Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain
- Limit (dB $\mu$ V/m) = Limit stated in standard
- Margin (dB) = Result (dB $\mu$ V/m) - Limit (dB $\mu$ V/m)
- Pk = Peak Reading
- AV. = Average Reading
- Remark = Mark Peak Reading or Average Reading

**Test Mode:** TX(CH High)**Tested by:** Eve Wang**Ambient temperature:** 24°C    **Relative humidity:** 52% RH    **Date:** August 25, 2015

Frequency (MHz)	Reading (dB $\mu$ V)	Correction Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2530.000	45.08	-2.21	42.87	74.00	-31.13	V	peak
3889.000	41.80	1.12	42.92	74.00	-31.08	V	peak
4429.000	40.67	3.10	43.77	74.00	-30.23	V	peak
5419.000	40.63	5.73	46.36	74.00	-27.64	V	peak
6427.000	40.03	6.77	46.80	74.00	-27.20	V	peak
6859.000	40.97	7.47	48.44	74.00	-25.56	V	peak
2251.000	45.55	-3.62	41.93	74.00	-32.07	H	Peak
2593.000	45.01	-2.09	42.92	74.00	-31.08	H	Peak
3142.000	44.22	-1.12	43.10	74.00	-30.90	H	Peak
4654.000	41.30	3.85	45.15	74.00	-28.85	H	peak
5356.000	40.66	5.61	46.27	74.00	-27.73	H	peak
6409.000	40.62	6.74	47.36	74.00	-26.64	H	peak

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = auto.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
- Reading (dB $\mu$ V/m) = Uncorrected Analyzer / Receiver Reading
- Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain
- Limit (dB $\mu$ V/m) = Limit stated in standard
- Margin (dB) = Result (dB $\mu$ V/m) - Limit (dB $\mu$ V/m)
- Pk = Peak Reading
- AV. = Average Reading
- Remark = Mark Peak Reading or Average Reading



## 6.10 POWERLINE CONDUCTED EMISSIONS

### LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50


Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### MEASUREMENT EQUIPMENT USED

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/28/2015	02/27/2016
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	02/28/2015	02/27/2016
LISN	EMCO	3825/2	8901-1459	02/28/2015	02/27/2016
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	02/28/2015	02/27/2016
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

**Remark:** Each piece of equipment is scheduled for calibration once a year.

## Test Configuration

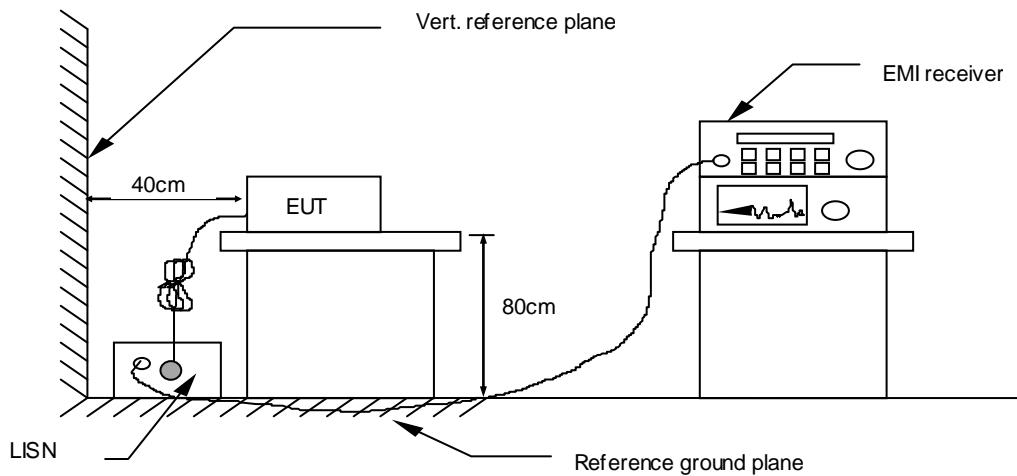

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

## TEST PROCEDURE


1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

## TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

**Test Data**

<b>Model No.</b>	A5008	<b>RBW,VBW</b>	9 kHz
<b>Environmental Conditions</b>	22°C, 45% RH	<b>Test Mode</b>	Mode 2
<b>Tested by</b>	Darry Wu	<b>Line</b>	L1
<b>Test Date</b>	August 26, 2015		

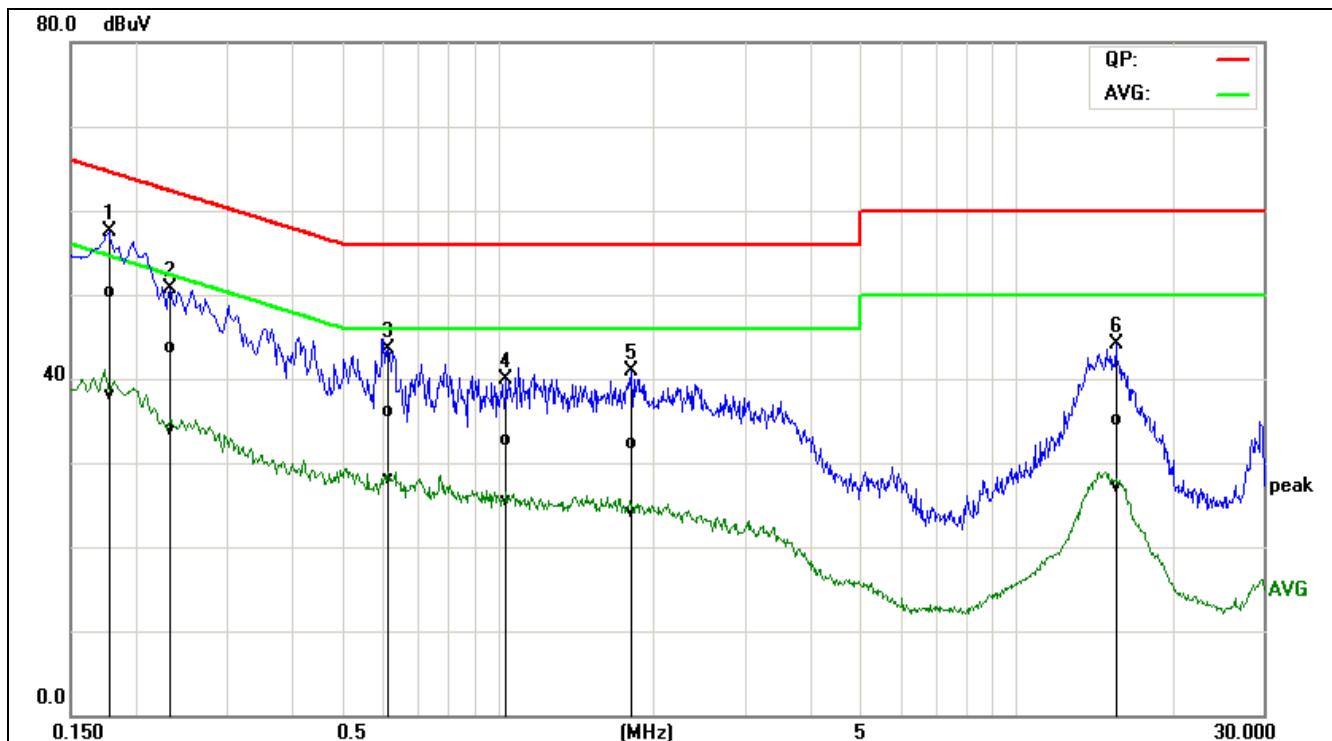


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)	Line (L1/L2)
0.1788	40.58	28.52	9.65	50.23	38.17	64.54	54.54	-14.31	-16.37	Pass	L1
0.2343	34.09	24.30	9.69	43.78	33.99	62.29	52.30	-18.51	-18.31	Pass	L1
0.6110	26.38	18.35	9.75	36.13	28.10	56.00	46.00	-19.87	-17.90	Pass	L1
1.0325	22.92	15.81	9.71	32.63	25.52	56.00	46.00	-23.37	-20.48	Pass	L1
1.8103	22.62	14.46	9.73	32.35	24.19	56.00	46.00	-23.65	-21.81	Pass	L1
15.5753	25.24	17.23	9.90	35.14	27.13	60.00	50.00	-24.86	-22.87	Pass	L1

**REMARKS:** L1 = Line One (Live Line)



<b>Model No.</b>	A5008	<b>RBW,VBW</b>	9 kHz
<b>Environmental Conditions</b>	22°C, 45% RH	<b>Test Mode</b>	Mode 2
<b>Tested by</b>	Darry Wu	<b>Line</b>	L1
<b>Test Date</b>	August 26, 2015		

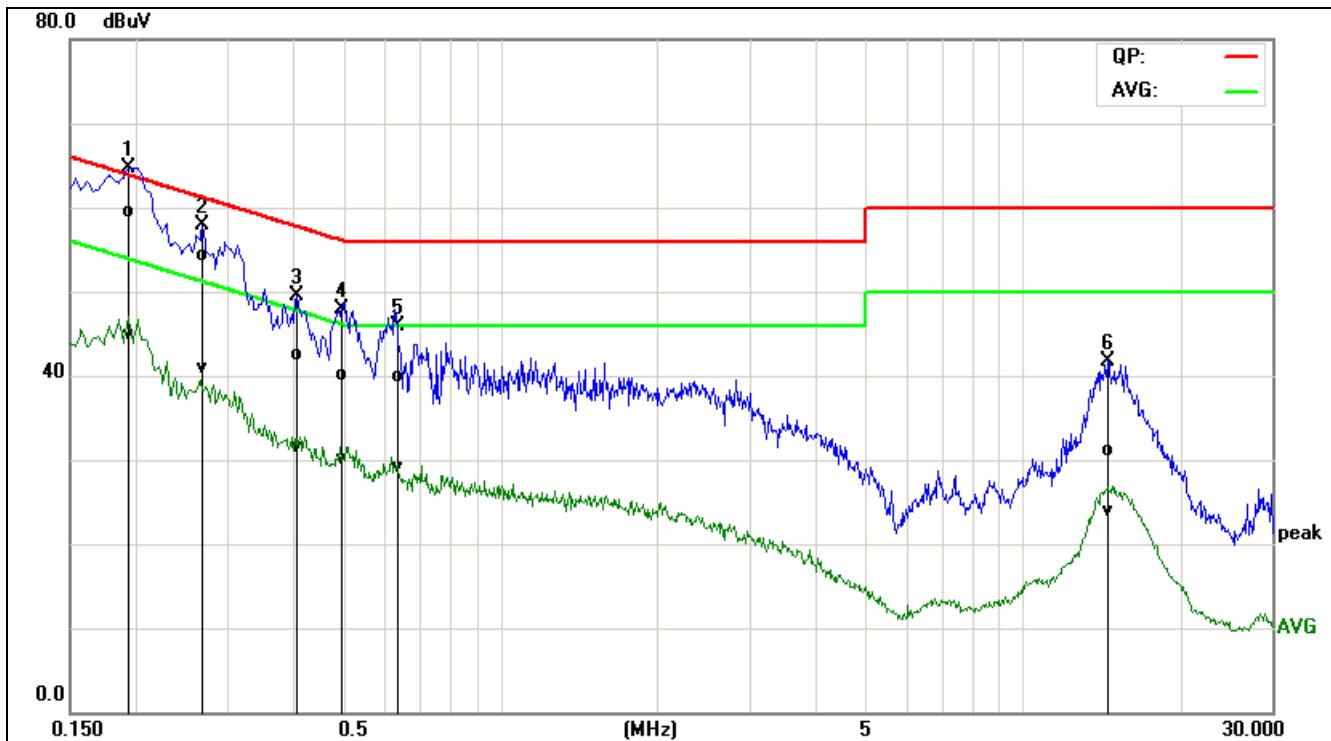

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)	Line (L1/L2)
0.1932	49.65	35.07	9.79	59.44	44.86	63.89	53.90	-4.45	-9.04	Pass	L2
0.2663	44.63	31.06	9.77	54.40	40.83	61.23	51.23	-6.83	-10.40	Pass	L2
0.4063	32.72	21.78	9.71	42.43	31.49	57.72	47.72	-15.29	-16.23	Pass	L2
0.4901	30.47	20.38	9.68	40.15	30.06	56.17	46.17	-16.02	-16.11	Pass	L2
0.6403	30.18	19.35	9.69	39.87	29.04	56.00	46.00	-16.13	-16.96	Pass	L2
14.4999	21.46	14.17	9.73	31.19	23.90	60.00	50.00	-28.81	-26.10	Pass	L2

**REMARKS:** L2 = Line Two (Neutral Line)