

Page: 1 of 216

SAR TEST REPORT





The following samples were submitted and identified on behalf of the client as:

Equipment Under Test Tablet Computer

Marketing Name GP8

Brand Name acer

Model No. A6201

Company Name Acer Incorporated

Company Address 8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi, New Taipei City

22181, Taiwan (R.O.C)

Standards IEEE/ANSI C95.1-1992, IEEE 1528-2013,

KDB248227D01v02r02,KDB865664D01v01r04,

KDB865664D02v01r02,KDB447498D01v06,

KDB616217D04v01r02, KDB941225D05v02r05

FCC ID HLZA6201

Date of Receipt Oct. 07, 2016

Date of Test(s) Oct. 17, 2016 ~ Nov. 01, 2016

Date of Issue Nov. 09, 2016

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Electronic & Communication Laboratory or testing done by SGS Taiwan Electronic & Communication Laboratory in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Electronic & Communication Laboratory in writing.

Signed on behalf of SGS	
Engineer	Supervisor
Matt Kuo Matt Kno	John Yeh
Date: Nov. 09, 2016	Date: Nov. 09, 2016

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 2 of 216

Revision History

Report Number	Revision	Description	Issue Date
E5/2016/A0007	Rev.00	Initial creation of document	Nov. 09, 2016

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 3 of 216

Contents

1. General Information	4
1.1 Testing Laboratory	4
1.2 Details of Applicant	4
1.3 Description of EUT	
1.4 Test Environment	62
1.5 Operation Description	62
1.6 Proximity sensor operation description	68
1.7 The SAR Measurement System	81
1.8 System Components	83
1.9 SAR System Verification	85
1.10 Tissue Simulant Fluid for the Frequency Band	87
1.11 Evaluation Procedures	89
1.12 Probe Calibration Procedures	90
1.13 Test Standards and Limits	93
2. Summary of Results	95
3. Simultaneous Transmission Analysis	103
3.1 Estimated SAR calculation	104
3.1 SPLSR evaluation and analysis	105
4. Instruments List	
5. Measurements	122
6. SAR System Performance Verification	134
7. DAE & Probe Calibration Certificate	
8. Uncertainty Budget	
9. Phantom Description	
10. System Validation from Original Equipment Supplier	
TU. SYSTEIN VANUATION ITOM ONGINAL EQUIPMENT SUPPLIER	103

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 4 of 216

1. General Information

1.1 Testing Laboratory

SGS Taiwan Ltd. Electronics & Communication Laboratory							
No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipe							
City, Taiwan							
Tel	+886-2-2299-3279						
Fax	+886-2-2298-0488						
Internet	http://www.tw.sgs.com/						

1.2 Details of Applicant

Company Name	Acer Incorporated
Company Address	8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi, New Taipei City 22181, Taiwan (R.O.C)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 5 of 216

1.3 Description of EUT

Equipment Under Test	Tablet Computer								
Marketing Name	GP8								
Brand Name	acer								
Model No.	A6201								
FCC ID	HLZA6201								
Mode of Operation	⊠LTE ⊠WLAN802.11 a/b/g/n(20M/40M) ⊠Bluetooth								
	LTE		1						
Duty Cycle	WLAN802.11 a/b/g/n(20M/40M)								
	Bluetooth		1						
	LTE FDD Band II	1850	_	1910					
	LTE FDD Band IV	1710	_	1755					
	LTE FDD Band VII	2500	_	2570					
	LTE FDD Band XII	699	_	716					
	LTE FDD Band XIII	777	_	787					
TV F	LTE FDD Band XVII	704	_	716					
TX Frequency Range (MHz)	WLAN802.11 b/g/n(20M)	2412	_	2462					
	WLAN802.11 n(40M)	2422	_	2452					
	WLAN802.11 a/n(20M) 5.2G	5180	_	5240					
	WLAN802.11 n(40M) 5.2G	5190	_	5230					
	WLAN802.11 a/n(20M) 5.3G	5260	_	5320					
	WLAN802.11 n(40M) 5.3G	5270	_	5310					
	WLAN802.11 a/n(20M) 5.6G	5500	_	5720					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 6 of 216

	WLAN802.11 n(40M) 5.6G	5510	_	5710
TX Frequency Range (MHz)	WLAN802.11 a/n(20M) 5.8G	5745	_	5825
	WLAN802.11 n(40M) 5.8G	5710	_	5795
	Bluetooth	2402	_	2480
	LTE FDD Band II	18607	_	19193
	LTE FDD Band IV	19957	_	20393
	LTE FDD Band VII	20775	_	21425
	LTE FDD Band XII	23007	_	23173
	LTE FDD Band XIII	23205	_	23255
	LTE FDD Band XVII	23755	_	23825
	WLAN802.11 b/g/n(20M)	1	_	11
	WLAN802.11 n(40M)	3	_	9
Channel Number (ARFCN)	WLAN802.11 a/n(20M) 5.2G	36	_	48
(7 11 11 51 1)	WLAN802.11 n(40M) 5.2G	38	_	46
	WLAN802.11 a/n(20M) 5.3G	52	_	64
	WLAN802.11 n(40M) 5.3G	54	_	62
	WLAN802.11 a/n(20M) 5.6G	100	_	144
	WLAN802.11 n(40M) 5.6G	102	_	142
	WLAN802.11 a/n(20M) 5.8G	149	_	165
	WLAN802.11 n(40M) 5.8G	142	_	159
	Bluetooth	0	_	78

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 7 of 216

Max. SAR (1 g) (Unit: W/Kg)									
Band	Measured	Reported	Channel	Position					
LTE FDD Band II	1.010	1.295	18900	Back side					
LTE FDD Band IV	0.959	1.288	20175	Back side					
LTE FDD Band VII	0.888	1.209	20850	Back side					
LTE FDD Band XII	0.826	1.007	23130	Back side					
LTE FDD Band XIII	0.956	1.048	23230	Back side					
LTE FDD Band XVII	0.711	0.959	23790	Back side					
WLAN802.11b	1.010	1.085	6	Back side					
WLAN802.11 a 5.2G	1.060	1.080	40	Back side					
WLAN802.11 a 5.3G	1.070	1.080	52	Back side					
WLAN802.11 a 5.6G	1.270	1.276	100	Back side					
WLAN802.11 n(20M) 5.6G	1.120	1.167	100	Back side					
WLAN802.11 a 5.8G	1.150	1.171	165	Back side					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 8 of 216

LTE FDD Band II/ Band IV/ Band VII/ Band XIII/ Band XVII power table:

table:			FDD	Band 2 (Full P	ower)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1860	18700	22.47	23.5	0
			0	1880	18900	22.58	23.5	0
				1900	19100	22.54	23.5	0
				1860	18700	23.46	23.5	0
		1 RB	50	1880	18900	23.38	23.5	0
				1900	19100	23.49	23.5	0
				1860	18700	22.98	23.5	0
			99	1880	18900	22.65	23.5	0
				1900	19100	22.92	23.5	0
				1860	18700	22.00	22.5	0-1
	QPSK		0	1880	18900	21.91	22.5	0-1
				1900	19100	22.11	22.5	0-1
				1860	18700	21.89	22.5	0-1
		50 RB	25	1880	18900	21.89	22.5	0-1
				1900	19100	22.03	22.5	0-1
			50	1860	18700	21.90	22.5	0-1
				1880	18900	21.98	22.5	0-1
				1900	19100	22.13	22.5	0-1
		100RB		1860	18700	21.97	22.5	0-1
				1880	18900	21.97	22.5	0-1
20				1900	19100	21.95	22.5	0-1
20			0	1860	18700	21.17	22.5	0-1
				1880	18900	21.57	22.5	0-1
				1900	19100	21.66	22.5	0-1
		1 RB	50	1860	18700	21.78	22.5	0-1
				1880	18900	22.13	22.5	0-1
				1900	19100	22.15	22.5	0-1
				1860	18700	21.86	22.5	0-1
			99	1880	18900	21.98	22.5	0-1
				1900	19100	21.81	22.5	0-1
				1860	18700	21.10	21.5	0-2
	16-QAM		0	1880	18900	20.81	21.5	0-2
				1900	19100	21.14	21.5	0-2
				1860	18700	21.00	21.5	0-2
		50 RB	25	1880	18900	21.12	21.5	0-2
				1900	19100	20.95	21.5	0-2
				1860	18700	21.07	21.5	0-2
			50	1880	18900	20.84	21.5	0-2
				1900	19100	21.20	21.5	0-2
				1860	18700	21.05	21.5	0-2
		100	RB	1880	18900	20.96	21.5	0-2
				1900	19100	21.04	21.5	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 9 of 216

	FDD Band 2 (Full Power)								
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				1857.5	18675	22.75	23.5	0	
			0	1880	18900	22.65	23.5	0	
				1902.5	19125	22.92	23.5	0	
				1857.5	18675	23.02	23.5	0	
		1 RB	36	1880	18900	22.72	23.5	0	
				1902.5	19125	23.35	23.5	0	
				1857.5	18675	22.95	23.5	0	
			74	1880	18900	22.72	23.5	0	
				1902.5	19125	23.22	23.5	0	
				1857.5	18675	21.97	22.5	0-1	
	QPSK		0	1880	18900	21.94	22.5	0-1	
				1902.5	19125	21.98	22.5	0-1	
				1857.5	18675	21.94	22.5	0-1	
		36 RB	18	1880	18900	21.95	22.5	0-1	
				1902.5	19125	22.03	22.5	0-1	
			37	1857.5	18675	21.94	22.5	0-1	
				1880	18900	21.94	22.5	0-1	
				1902.5	19125	22.10	22.5	0-1	
				1857.5	18675	21.98	22.5	0-1	
		75RB		1880	18900	21.93	22.5	0-1	
15				1902.5	19125	22.01	22.5	0-1	
13				1857.5	18675	21.74	22.5	0-1	
			0	1880	18900	21.44	22.5	0-1	
				1902.5	19125	21.58	22.5	0-1	
			36	1857.5	18675	21.91	22.5	0-1	
		1 RB		1880	18900	21.70	22.5	0-1	
				1902.5	19125	21.70	22.5	0-1	
				1857.5	18675	21.82	22.5	0-1	
			74	1880	18900	21.84	22.5	0-1	
				1902.5	19125	21.70	22.5	0-1	
				1857.5	18675	21.04	21.5	0-2	
	16-QAM		0	1880	18900	20.78	21.5	0-2	
				1902.5	19125	21.07	21.5	0-2	
				1857.5	18675	20.90	21.5	0-2	
		36 RB	18	1880	18900	20.87	21.5	0-2	
				1902.5	19125	21.08	21.5	0-2	
				1857.5	18675	20.90	21.5	0-2	
			37	1880	18900	20.95	21.5	0-2	
				1902.5	19125	21.14	21.5	0-2	
				1857.5	18675	21.02	21.5	0-2	
		75	RB	1880	18900	20.83	21.5	0-2	
				1902.5	19125	21.10	21.5	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 10 of 216

	FDD Band 2 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1855	18650	22.32	23.5	0				
			0	1880	18900	22.49	23.5	0				
				1905	19150	22.75	23.5	0				
				1855	18650	22.62	23.5	0				
		1 RB	25	1880	18900	22.80	23.5	0				
				1905	19150	23.17	23.5	0				
				1855	18650	22.97	23.5	0				
			49	1880	18900	22.65	23.5	0				
				1905	19150	23.08	23.5	0				
				1855	18650	22.02	22.5	0-1				
	QPSK		0	1880	18900	21.89	22.5	0-1				
				1905	19150	22.07	22.5	0-1				
				1855	18650	21.93	22.5	0-1				
		25 RB	12	1880	18900	21.99	22.5	0-1				
				1905	19150	22.02	22.5	0-1				
			25	1855	18650	21.89	22.5	0-1				
				1880	18900	21.90	22.5	0-1				
				1905	19150	22.09	22.5	0-1				
				1855	18650	21.97	22.5	0-1				
		50	RB	1880	18900	21.92	22.5	0-1				
10				1905	19150	22.07	22.5	0-1				
			0	1855	18650	21.93	22.5	0-1				
				1880	18900	21.97	22.5	0-1				
				1905	19150	22.01	22.5	0-1				
			25	1855	18650	22.16	22.5	0-1				
		1 RB		1880	18900	22.26	22.5	0-1				
				1905	19150	22.23	22.5	0-1				
				1855	18650	21.81	22.5	0-1				
			49	1880	18900	21.63	22.5	0-1				
				1905	19150	21.88	22.5	0-1				
			_	1855	18650	20.82	21.5	0-2				
	16-QAM		0	1880	18900	21.09	21.5	0-2				
				1905	19150	21.05	21.5	0-2				
		05.55	4.5	1855	18650	21.22	21.5	0-2				
		25 RB	12	1880	18900	21.02	21.5	0-2				
				1905	19150	21.14	21.5	0-2				
			0.5	1855	18650	21.21	21.5	0-2				
			25	1880	18900	20.92	21.5	0-2				
				1905	19150	21.45	21.5	0-2				
			DD	1855	18650	20.91	21.5	0-2				
		50	RB	1880	18900	20.77	21.5	0-2				
								1905	19150	21.13	21.5	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 11 of 216

	FDD Band 2 (Full Power)								
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				1852.5	18625	22.35	23.5	0	
			0	1880	18900	22.85	23.5	0	
				1907.5	19175	22.56	23.5	0	
				1852.5	18625	22.98	23.5	0	
		1 RB	12	1880	18900	22.99	23.5	0	
				1907.5	19175	23.47	23.5	0	
				1852.5	18625	22.46	23.5	0	
			24	1880	18900	22.65	23.5	0	
				1907.5	19175	22.72	23.5	0	
				1852.5	18625	21.79	22.5	0-1	
	QPSK		0	1880	18900	21.92	22.5	0-1	
				1907.5	19175	22.09	22.5	0-1	
				1852.5	18625	21.89	22.5	0-1	
		12 RB	6	1880	18900	21.87	22.5	0-1	
				1907.5	19175	22.13	22.5	0-1	
			13	1852.5	18625	21.88	22.5	0-1	
				1880	18900	21.99	22.5	0-1	
				1907.5	19175	22.01	22.5	0-1	
				1852.5	18625	21.91	22.5	0-1	
		25RB		1880	18900	21.85	22.5	0-1	
5				1907.5	19175	22.04	22.5	0-1	
				1852.5	18625	21.44	22.5	0-1	
			0	1880	18900	21.87	22.5	0-1	
				1907.5	19175	21.34	22.5	0-1	
			12	1852.5	18625	21.86	22.5	0-1	
		1 RB		1880	18900	21.45	22.5	0-1	
				1907.5	19175	22.31	22.5	0-1	
				1852.5	18625	21.50	22.5	0-1	
			24	1880	18900	21.56	22.5	0-1	
				1907.5	19175	21.94	22.5	0-1	
			_	1852.5	18625	21.11	21.5	0-2	
	16-QAM		0	1880	18900	20.91	21.5	0-2	
				1907.5	19175	21.06	21.5	0-2	
		40.00		1852.5	18625	21.00	21.5	0-2	
		12 RB	6	1880	18900	20.92	21.5	0-2	
				1907.5	19175	21.17	21.5	0-2	
			40	1852.5	18625	21.08	21.5	0-2	
			13	1880	18900	20.99	21.5	0-2	
				1907.5	19175	21.18	21.5	0-2	
			DD	1852.5	18625	20.93	21.5	0-2	
		25	RB	1880	18900	21.04	21.5	0-2	
				1907.5	19175	21.19	21.5	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sgs.com



Page: 12 of 216

FDD Band 2 (Full Power)										
			100	·	Ower)		Target Power +	MPR		
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Max. Tolerance (dBm)	Allowed per 3GPP(dB)		
				1851.5	18615	22.64	23.5	0		
			0	1880	18900	22.78	23.5	0		
				1908.5	19185	22.68	23.5	0		
				1851.5	18615	23.00	23.5	0		
		1 RB	7	1880	18900	23.03	23.5	0		
				1908.5	19185	23.07	23.5	0		
				1851.5	18615	22.81	23.5	0		
			14	1880	18900	22.73	23.5	0		
				1908.5						
				1851.5						
	QPSK		0	1880						
				1908.5						
				1851.5				.		
		8 RB	4	1880		+				
				1908.5		_				
				1851.5						
			7	1880						
				1908.5						
				1851.5		+				
		15	RB	1880						
3			1	1908.5						
			_	1851.5						
			0	1880						
				1908.5		+				
			_	1851.5		1				
		1 RB	7	1880						
				1908.5						
				1851.5		(dBm) 18615 22.64 23.5 0 18900 22.78 23.5 0 19185 22.68 23.5 0 18615 23.00 23.5 0 18900 23.03 23.5 0 19185 23.07 23.5 0 18615 22.81 23.5 0				
			14	1880		1				
				1908.5						
	40.044			1851.5						
	16-QAM		0	1880		+				
				1908.5						
		0.00		1851.5						
		8 RB	4	1880						
				1908.5						
			7	1851.5		1		0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
			7	1880						
				1908.5			23.5 0 23.5 0 23.5 0 23.5 0 23.5 0 23.5 0 23.5 0 23.5 0 22.5 0-1			
	15F		DD	1851.5				3.5 0 3.5 0 3.5 0 3.5 0 3.5 0 3.5 0 3.5 0 2.5 0-1 2.5 0-2 1.5 0-2		
		15	KR	1880						
			1908.5	19185	21.07	21.5	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Page: 13 of 216

FDD Band 2 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1850.7	18607	22.56	23.5	0			
			0	1880	18900	22.86	23.5	0			
				1909.3	19193	22.88	23.5	0			
				1850.7	18607	23.06	23.5	0			
		1 RB	2	1880	18900	22.86	23.5	0			
				1909.3	19193	22.91	23.5	0			
				1850.7	18607	22.65	23.5	0			
			5	1880	18900	22.90	23.5	0			
				1909.3	19193	22.83	23.5	0			
				1850.7	18607	22.75	23.5	0			
	QPSK		0	1880	18900	22.84	23.5	0			
				1909.3	19193	23.25	23.5	0			
				1850.7	18607	22.91	23.5	0			
		3 RB	2	1880	18900	23.15	23.5	0			
				1909.3	19193	23.14	23.5	0			
				1850.7	18607	22.86	23.5	0			
			3	1880	18900	23.07	23.5	0			
				1909.3	19193	23.18	23.5	0			
				1850.7	18607	21.95	22.5	0-1			
		6F	RB	1880	18900	21.73	22.5	0-1			
1.4				1909.3	19193	22.07	22.5	0-1			
17				1850.7	18607	21.55	22.5	0-1			
			0	1880	18900	21.42	22.5	0-1			
				1909.3	19193	21.69	22.5	0-1			
				1850.7	18607	22.01	22.5	0-1			
		1 RB	2	1880	18900	22.47	22.5	0-1			
				1909.3	19193	22.10	22.5	0-1			
				1850.7	18607	21.81	22.5	0-1			
			5	1880	18900	21.68	22.5	0-1			
				1909.3	19193	22.11	22.5	0-1			
				1850.7	18607	21.82	22.5	0-1			
	16-QAM		0	1880	18900	22.15	22.5	0-1			
				1909.3	19193	22.05	22.5	0-1			
				1850.7	18607	22.34	22.5	0-1			
		3 RB	2	1880	18900	22.03	22.5				
				1909.3	19193	22.09	22.5	0-1			
			_	1850.7	18607	22.31	22.5	0-1			
			3	1880	18900	22.16	22.5	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1			
				1909.3	19193	22.08	22.5	-			
			_	1850.7	18607	20.85	21.5				
		6F	RB	1880	18900	20.93	21.5	0-2			
			OIXI		1909.3	19193	20.85	21.5	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 14 of 216

	FDD Band 2 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1860	18700	15.06	15.5	0				
			0	1880	18900	15.26	15.5	0				
				1900	19100	14.92	15.5	0				
				1860	18700	15.09	15.5	0				
		1 RB	50	1880	18900	15.09	15.5	0				
				1900	19100	15.26	15.5	0				
				1860	18700	15.02	15.5	0				
			99	1880	18900	14.76	15.5	0				
				1900	19100	14.98	15.5	0				
				1860	18700	14.29	15.5	0				
	QPSK		0	1880	18900	14.42	15.5	0				
				1900	19100	14.15	15.5	0				
				1860	18700	14.45	15.5	0				
		50 RB	25	1880	18900	14.18	15.5	0				
				1900	19100	14.09	15.5					
				1860	18700	14.77	15.5	0				
			50	1880	18900	14.00	15.5	0				
				1900	19100	14.09	15.5	0				
				1860	18700	14.49	15.5	0				
		100)RB	1880	18900	14.03	15.5	0				
20				1900	19100	14.04	15.5	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				1860	18700	14.45	15.5					
			0	1880	18900	14.36	15.5					
				1900	19100	14.17	15.5					
				1860	18700	14.94	15.5					
		1 RB	50	1880	18900	14.62	15.5					
				1900	19100	13.93	15.5					
				1860	18700	14.55	15.5					
			99	1880	18900	13.78	15.5					
				1900	19100	13.76	15.5					
	40.0414			1860	18700	13.36	15.5					
	16-QAM		0	1880	18900	13.44	15.5					
				1900	19100	13.55	15.5					
		E0 DD	05	1860	18700	13.46	15.5	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
		50 RB	25	1880	18900	13.55	15.5					
				1900	19100	13.92	15.5					
			E0	1860	18700	13.78	15.5					
			50	1880	18900	13.58	15.5					
				1900	19100	13.54	15.5					
	1001	400	\DD	1860	18700	13.52	15.5	3.5 0 3.5				
		100	IKB	1880	18900	13.04	15.5					
				1900	19100	13.15	15.5	0				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 15 of 216

	FDD Band 2 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1857.5	18675	14.76	15.5	0				
			0	1880	18900	15.09	15.5	0				
				1902.5	19125	15.07	15.5	0				
				1857.5	18675	14.90	15.5	0				
		1 RB	36	1880	18900	15.06	15.5	0				
				1902.5	19125	15.01	15.5	0				
				1857.5	18675	15.06	15.5	0				
			74	1880	18900	15.12	15.5	0				
				1902.5	19125	15.09	15.5	0				
				1857.5	18675	14.26	15.5	0				
	QPSK		0	1880	18900	14.39	15.5	0				
				1902.5	19125	14.02	15.5	0				
				1857.5	18675	14.17	15.5	0				
		36 RB	18	1880	18900	14.13	15.5	0				
				1902.5	19125	13.89	15.5	0				
				1857.5	18675	14.24	15.5	0				
			37	1880	18900	14.05	15.5	0				
				1902.5	19125	14.45	15.5	0				
				1857.5	18675	14.25	15.5	0				
		75	RB	1880	18900	14.04	15.5	0				
15				1902.5	19125	13.96	15.5	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
10				1857.5	18675	14.37	15.5	0				
			0	1880	18900	14.52	15.5	0				
				1902.5	19125	13.84	15.5	0				
				1857.5	18675	14.27	15.5	0				
		1 RB	36	1880	18900	14.20	15.5	0				
				1902.5	19125	14.12	15.5					
				1857.5	18675	14.87	15.5					
			74	1880	18900	14.09	15.5					
				1902.5	19125	14.19	15.5	0				
				1857.5	18675	13.27	15.5	0				
	16-QAM		0	1880	18900	13.45	15.5	0				
				1902.5	19125	11.64	15.5	0				
				1857.5	18675	13.23	15.5	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
		36 RB	18	1880	18900	13.16	15.5					
				1902.5	19125	11.68	15.5					
				1857.5	18675	13.29	15.5					
			37	1880	18900	13.11	15.5					
				1902.5	19125	12.39	15.5	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				1857.5	18675	13.28	15.5					
		75	RB	1880	18900	13.05	15.5					
		73110		1902.5	19125	12.09	15.5	0				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_end_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this onlineful.

f (886-2) 2298-0488

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 16 of 216

	FDD Band 2 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1855	18650	15.29	15.5	0				
			0	1880	18900	14.79	15.5	0				
				1905	19150	14.87	15.5	0				
				1855	18650	15.06	15.5	0				
		1 RB	25	1880	18900	14.94	15.5	0				
				1905	19150	15.21	15.5	0				
				1855	18650	14.74	15.5	0				
			49	1880	18900	14.98	15.5	0				
				1905	19150	15.03	15.5	0				
				1855	18650	14.41	15.5	0				
	QPSK		0	1880	18900	14.14	15.5	0				
				1905	19150	13.94	15.5	0				
				1855	18650	14.30	15.5	0				
		25 RB	12	1880	18900	14.11	15.5	0				
				1905	19150	13.75	15.5	0				
				1855	18650	14.09	15.5	0				
			25	1880	18900	14.13	15.5	0				
				1905	19150	13.82	15.5	0				
				1855	18650	14.30	15.5	0				
		50	RB	1880	18900	14.06	15.5	0				
10				1905	19150	13.97	15.5	0				
. •				1855	18650	14.78	15.5	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
			0	1880	18900	14.72	15.5	0				
				1905	19150	13.58	15.5	0				
				1855	18650	14.43	15.5	0				
		1 RB	25	1880	18900	14.11	15.5	0				
				1905	19150	13.60	15.5					
				1855	18650	14.35	15.5					
			49	1880	18900	14.30	15.5					
				1905	19150	13.99	15.5					
				1855	18650	13.45	15.5					
	16-QAM		0	1880	18900	13.21	15.5	0				
				1905	19150	11.80	15.5	0				
				1855	18650	13.39	15.5					
		25 RB	12	1880	18900	13.21	15.5					
				1905	19150	12.07	15.5					
				1855	18650	13.07	15.5	0				
			25	1880	18900	13.18	15.5	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				1905	19150	12.86	15.5					
				1855	18650	13.34	15.5					
		50	RB	1880	18900	13.06	15.5					
			John		1905	19150	12.32	15.5	0			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 17 of 216

FDD Band 2 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1852.5	18625	14.77	15.5	0			
			0	1880	18900	14.96	15.5	0			
				1907.5	19175	14.70	15.5	0			
				1852.5	18625	14.93	15.5	0			
		1 RB	12	1880	18900	15.49	15.5	0			
				1907.5	19175	15.25	15.5	0			
				1852.5	18625	14.86	15.5	0			
			24	1880	18900	14.61	15.5	0			
				1907.5	19175	14.83	15.5	0			
				1852.5	18625	14.40	15.5	0			
	QPSK		0	1880	18900	14.17	15.5	0			
				1907.5	19175	13.61	15.5	0			
				1852.5	18625	14.34	15.5	0			
		12 RB	6	1880	18900	13.94	15.5	0			
				1907.5	19175	13.84	15.5	0			
				1852.5	18625	14.25	15.5	0			
			13	1880	18900	13.98	15.5	0			
				1907.5	19175	13.97	15.5	0			
				1852.5	18625	14.38	15.5	0			
		25	RB	1880	18900	13.98	15.5	0			
5				1907.5	19175	13.85	15.5	0			
3				1852.5	18625	14.60	15.5	0			
			0	1880	18900	14.36	15.5	0			
				1907.5	19175	13.37	15.5	0			
				1852.5	18625	15.01	15.5	0			
		1 RB	12	1880	18900	14.48	15.5	0			
				1907.5	19175	14.39	15.5	0			
				1852.5	18625	14.36	15.5	0			
			24	1880	18900	14.30	15.5	0			
				1907.5	19175	14.30	15.5	0			
				1852.5	18625	13.39	15.5	0			
	16-QAM		0	1880	18900	13.27	15.5	0			
				1907.5	19175	12.62	15.5	0			
				1852.5	18625	13.40	15.5	0			
		12 RB	6	1880	18900	13.05	15.5	0			
				1907.5	19175	12.86	15.5	0			
				1852.5	18625	13.24	15.5	0			
			13	1880	18900	12.96	15.5	0			
				1907.5	19175	13.09	15.5	0			
	25R			1852.5	18625	13.41	15.5	0			
		RB	1880	18900	12.97	15.5	0				
				1907.5	19175	12.96	15.5	0			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 18 of 216

	FDD Band 2 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1851.5	18615	14.70	15.5	0				
			0	1880	18900	14.74	15.5	0				
				1908.5	19185	14.85	15.5	0				
				1851.5	18615	14.65	15.5	0				
		1 RB	7	1880	18900	14.89	15.5	0				
				1908.5	19185	14.82	15.5	0				
				1851.5	18615	14.63	15.5	0				
			14	1880	18900	14.66	15.5	0				
				1908.5	19185	14.76	15.5	0				
				1851.5	18615	14.32	15.5	0				
	QPSK		0	1880	18900	13.69	15.5	0				
				1908.5	19185	13.92	15.5	0				
				1851.5	18615	14.26	15.5	0				
		8 RB	4	1880	18900	13.78	15.5	0				
				1908.5	19185	14.06	15.5	0				
				1851.5	18615	14.27	15.5	0				
			7	1880	18900	13.69	15.5	0				
				1908.5	19185	14.00	15.5	0				
				1851.5	18615	14.30	15.5	0				
		15	RB	1880	18900	13.70	15.5	0				
3				1908.5	19185	13.96	15.5	0				
				1851.5	18615	14.98	15.5	0				
			0	1880	18900	14.45	15.5	0				
				1908.5	19185	14.36	15.5	0				
				1851.5	18615	14.54	15.5	0				
		1 RB	7	1880	18900	13.93	15.5	0				
				1908.5	19185	14.14	15.5	0				
				1851.5	18615	14.96	15.5	0				
			14	1880	18900	14.61		0				
				1908.5	19185	14.47		0				
				1851.5	18615	13.40						
	16-QAM		0	1880	18900	12.80	15.5	0				
				1908.5	19185	13.02	15.5	0				
				1851.5	18615	13.44						
		8 RB	4	1880	18900	12.82						
				1908.5	19185	13.09						
			_	1851.5	18615	13.35		e Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
			7	1880	18900	12.84	15.5					
				1908.5	19185	13.04	15.5 0 15.5 0					
				1851.5	18615	13.35						
	1!	15	RB	1880	18900	12.79						
		_		1908.5	19185	13.02	15.5	0				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 19 of 216

FDD Band 2 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1850.7	18607	14.56	15.5	0			
			0	1880	18900	14.70	15.5	0			
				1909.3	19193	14.83	15.5	0			
				1850.7	18607	14.78	15.5	0			
		1 RB	2	1880	18900	14.85	15.5	0			
				1909.3	19193	14.83	15.5	0			
				1850.7	18607	14.65	15.5	0			
			5	1880	18900	14.51	15.5	0			
				1909.3	19193	14.79	15.5	0			
				1850.7	18607	14.67	15.5	0			
	QPSK		0	1880	18900	14.81	15.5	0			
				1909.3	19193	14.90	15.5	0			
				1850.7	18607	14.74	15.5	0			
		3 RB	2	1880	18900	14.77	15.5	0			
				1909.3	19193	14.91	15.5	0			
				1850.7	18607	14.79	15.5	0			
			3	1880	18900	14.81	15.5	0			
				1909.3	19193	14.95	15.5	0			
				1850.7	18607	14.23	15.5	0			
		6F	RB	1880	18900	13.68	15.5	0			
1.4				1909.3	19193	13.95	15.5	0			
1				1850.7	18607	14.37	15.5	0			
			0	1880	18900	14.07	15.5	0			
				1909.3	19193	14.24	15.5	0			
				1850.7	18607	14.98	15.5	0			
		1 RB	2	1880	18900	14.29	15.5	0			
				1909.3	19193	14.46	15.5	0			
				1850.7	18607	14.38	15.5	0			
			5	1880	18900	13.86	15.5	0			
				1909.3	19193	13.91	15.5	0			
				1850.7	18607	14.25	15.5	0			
	16-QAM		0	1880	18900	13.62	15.5	0			
				1909.3	19193	13.97	15.5	0			
				1850.7	18607	14.55	15.5	0			
		3 RB	2	1880	18900	13.68	15.5	0			
				1909.3	19193	14.04	15.5	0			
				1850.7	18607	14.24	15.5	0			
			3	1880	18900	13.77	15.5	0			
				1909.3	19193	13.99	15.5	0			
				1850.7	18607	13.29	15.5	0			
	6R	RB	1880	18900	12.80	15.5	0				
					0.1		1909.3	19193	13.21	15.5	0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 20 of 216

FDD Band 4 (Full Power)										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				1720	20050	23.63	24	0		
			0	1732.5	20175	23.69	24	0		
				1745	20300	23.53	24	0		
				1720	20050	23.91	24	0		
		1 RB	50	1732.5	20175	23.99	24	0		
				1745	20300	23.95	24	0		
				1720	20050	23.35	24	0		
			99	1732.5	20175	23.74	24	0		
				1745	20300	23.45	24			
				1720	20050	22.80				
	QPSK		0	1732.5	20175	22.75				
				1745	20300	23.00				
				1720	20050	22.78		.		
		50 RB	25	1732.5	20175	22.72				
				1745	20300	22.94				
				1720	20050	22.83				
			50	1732.5	20175	22.72				
				1745	20300	22.92				
				1720	20050	22.82				
		100)RB	1732.5	20175	22.72				
20			1	1745	20300	22.95				
			0	1720	20050	22.37				
			0	1732.5	20175	22.55				
				1745	20300	22.68				
		4.00	50	1720	20050	22.57				
		1 RB	50	1732.5	20175	22.52				
				1745	20300	22.68				
			00	1720	20050	22.32				
			99	1732.5	20175	22.77				
				1745	20300	22.16				
	16-QAM		_	1720	20050	21.86				
	10-QAIVI		0	1732.5	20175	21.60				
				1745	20300	21.88				
		50 RB	25	1720 1732.5	20050 20175	21.92 21.57				
		30 KD	25	1732.5	20300	22.00				
				1745	20050	21.74				
			50	1732.5	20050	21.74				
			30	1732.5	20300	21.78				
				1745	20050	21.85		Mer + MPR Allowed per 3GPP(dB) 24 0 0 24 0 0 24 0 0 24 0 0 24 0 0 24 0 0 24 0 0 24 0 0 24 0 0 24 0 0 24 0 0 24 0 0 24 0 0 24 0 0 24 0 0 24 0 0 24 0 0 0 0		
	100F	100)RB	1732.5	20030	21.60				
		,,,,,	1732.3	20300	21.98					
				1740	20300	21.30	22	U <u>-</u> ∠		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_end_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this onlineful.

f (886-2) 2298-0488

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 21 of 216

	FDD Band 4 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1717.5	20025	23.70	24	0				
			0	1732.5	20175	23.57	24	0				
				1747.5	20325	23.95	24	0				
				1717.5	20025	23.95	24	0				
		1 RB	36	1732.5	20175	23.62	24	0				
				1747.5	20325	23.72	24	0				
				1717.5	20025	23.52	24	0				
			74	1732.5	20175	23.90	24	0				
				1747.5	20325	23.86	24	0				
				1717.5	20025	22.75	23	0-1				
	QPSK		0	1732.5	20175	22.80	23	0-1				
				1747.5	20325	23.00	23	0-1				
				1717.5	20025	22.75	23	0-1				
		36 RB	18	1732.5	20175	22.72	23	0-1				
				1747.5	20325	22.88	23	0-1				
				1717.5	20025	22.80	23	0-1				
			37	1732.5	20175	22.77	23	0-1				
				1747.5	20325	22.90	23	0-1				
				1717.5	20025	22.81	23	0-1				
		75	RB	1732.5	20175	22.73	23	0-1				
15			T	1747.5	20325	22.96	23	0-1				
				1717.5	20025	22.24	23	0-1				
			0	1732.5	20175	22.52	23					
				1747.5	20325	22.61	23					
				1717.5	20025	22.28	23					
		1 RB	36	1732.5	20175	22.56	23					
				1747.5	20325	22.49	23					
				1717.5	20025	22.57	23					
			74	1732.5	20175	22.63	23					
				1747.5	20325	22.54	23					
	100011			1717.5	20025	21.79	22					
	16-QAM		0	1732.5	20175	21.63	22					
				1747.5	20325	21.77	22					
		00.00	40	1717.5	20025	21.71	22					
		36 RB	18	1732.5	20175	21.71	22					
				1747.5	20325	21.88	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-				
			27	1717.5	20025	21.75	22					
			37	1732.5	20175	21.78	22					
				1747.5	20325	21.83	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1				
	75R	75	DD	1717.5	20025	21.70	22					
		/5	KD	1732.5	20175	21.75	22					
				1747.5	20325	21.91	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 22 of 216

			FDD	Band 4 (Full P	ower)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1715	20000	23.83	24	0
			0	1732.5	20175	23.76	24	0
				1750	20350	23.86	24	0
				1715	20000	23.87	24	0
		1 RB	25	1732.5	20175	23.61	24	0
				1750	20350	23.55	24	0
				1715	20000	23.56	24	0
			49	1732.5	20175	23.36	24	0
				1750	20350	23.44	24	0
				1715	20000	22.77	23	0-1
	QPSK		0	1732.5	20175	22.66	23	0-1
				1750	20350	22.87	23	0-1
				1715	20000	22.82	23	0-1
		25 RB	12	1732.5	20175	22.74	23	0-1
				1750	20350	22.96	23	0-1
				1715	20000	22.83	23	0-1
			25	1732.5	20175	22.73	23	0-1
				1750	20350	22.91	23	0-1
				1715	20000	22.77	23	0-1
		50	RB	1732.5	20175	22.72	23	0-1
10				1750	20350	22.92	23	0-1
				1715	20000	22.45	23	0-1
			0	1732.5	20175	22.66	23	0-1
				1750	20350	22.46	23	0-1
				1715	20000	22.64	23	0-1
		1 RB	25	1732.5	20175	22.74	23	0-1
				1750	20350	22.71	23	0-1
				1715	20000	22.26	23	0-1
			49	1732.5	20175	22.53	23	0-1
				1750	20350	22.92	23	0-1
	40.0444			1715	20000	21.85	22	0-2
	16-QAM		0	1732.5	20175	21.79	22	0-2
				1750	20350	21.93	22	0-2
		05.00	40	1715	20000	21.73	22	0-2
		25 RB	12	1732.5	20175	21.60	22	0-2
				1750	20350	22.00	22	0-2
			25	1715	20000	21.71	22	0-2
			25	1732.5	20175	21.45	22	0-2
				1750	20350	21.93	22	0-2
	50R		DD	1715	20000	21.72	22	0-2
		KĎ	1732.5	20175	21.56	22	0-2	
				1750	20350	21.85	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 23 of 216

	FDD Band 4 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1712.5	19975	23.43	24	0				
			0	1732.5	20175	23.32	24	0				
				1752.5	20375	23.55	24	0				
				1712.5	19975	23.70	24	0				
		1 RB	12	1732.5	20175	23.60	24	0				
				1752.5	20375	23.84	24	0				
				1712.5	19975	23.60	24	0				
			24	1732.5	20175	23.72	24	0				
				1752.5	20375	23.47	24	0				
				1712.5	19975	22.77	23	0-1				
	QPSK		0	1732.5	20175	22.73	23	0-1				
				1752.5	20375	22.93	23	0-1				
				1712.5	19975	22.69	23	0-1				
		12 RB	6	1732.5	20175	22.79	23	0-1				
				1752.5	20375	23.00	23	0-1				
				1712.5	19975	22.69	23	0-1				
			13	1732.5	20175	22.66	23	0-1				
				1752.5	20375	22.83	23	0-1				
				1712.5	19975	22.74	23	0-1				
		25	RB	1732.5	20175	22.72	23	0-1				
5				1752.5	20375	22.91	23	0-1				
J				1712.5	19975	22.26	23	0-1				
			0	1732.5	20175	22.30	23	0-1				
				1752.5	20375	22.93	23	0-1				
				1712.5	19975	22.59	23	0-1				
		1 RB	12	1732.5	20175	22.63	23	0-1				
				1752.5	20375	22.84	23	0-1				
				1712.5	19975	22.50	23	0-1				
			24	1732.5	20175	22.58	23	0-1				
				1752.5	20375	22.71	23	0-1				
				1712.5	19975	21.70	22	0-2				
	16-QAM		0	1732.5	20175	21.74	22	0-2				
				1752.5	20375	21.63	22	0-2				
				1712.5	19975	21.71	22	0-2				
		12 RB	6	1732.5	20175	21.75	22	0-2				
				1752.5	20375	21.68	22	0-2				
				1712.5	19975	21.68	22	0-2				
			13	1732.5	20175	21.78	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1				
				1752.5	20375	21.77	22	0-2				
	25RE			1712.5	19975	21.69	22	0-2				
		RB	1732.5	20175	21.70	22						
			1752.5	20375	21.89	22	0-2					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 24 of 216

	FDD Band 4 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1711.5	19965	23.90	24	0				
			0	1732.5	20175	23.80	24	0				
				1753.5	20385	23.60	24	0				
				1711.5	19965	23.99	24	0				
		1 RB	7	1732.5	20175	23.88	24	0				
				1753.5	20385	23.73	24	0				
				1711.5	19965	23.50	24	0				
			14	1732.5	20175	23.50	24	0				
				1753.5	20385	23.38	24	0				
				1711.5	19965	22.70	23	0-1				
	QPSK		0	1732.5	20175	22.84	23	0-1				
				1753.5	20385	22.71	23	0-1				
				1711.5	19965	22.73	23	0-1				
		8 RB	4	1732.5	20175	22.79	23	0-1				
				1753.5	20385	22.63	23	0-1				
				1711.5	19965	22.63	23	0-1				
			7	1732.5	20175	22.69	23	0-1				
				1753.5	20385	22.80	23	0-1				
				1711.5	19965	22.74	23	0-1				
		15	RB	1732.5	20175	22.71	23	0-1				
3			•	1753.5	20385	22.66	23	0-1				
				1711.5	19965	22.58	23	0-1				
			0	1732.5	20175	22.92	23	0-1				
				1753.5	20385	22.77	23	0-1				
				1711.5	19965	22.51	23	0-1				
		1 RB	7	1732.5	20175	22.69	23	0-1				
				1753.5	20385	22.31	23					
				1711.5	19965	22.14	23					
			14	1732.5	20175	22.55	23					
				1753.5	20385	22.29	23					
				1711.5	19965	21.67	22					
	16-QAM		0	1732.5	20175	21.34	22					
				1753.5	20385	21.76	22	0-2				
		0.55		1711.5	19965	21.72	22					
		8 RB	4	1732.5	20175	21.55	22	0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1				
				1753.5	20385	21.80	22					
			_	1711.5	19965	21.79	22					
			7	1732.5	20175	21.45	22					
				1753.5	20385	21.54	22	-				
			DD	1711.5	19965	21.49	22					
		15	RB	1732.5	20175	21.50	22					
			1753.5	20385	21.63	22	0-2					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 25 of 216

	FDD Band 4 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1710.7	19957	23.63	24	0				
			0	1732.5	20175	23.36	24	0				
				1754.3	20393	23.66	24	0				
				1710.7	19957	23.75	24	0				
		1 RB	2	1732.5	20175	23.46	24	0				
				1754.3	20393	23.71	24	0				
				1710.7	19957	23.60	24	0				
			5	1732.5	20175	23.72	24	0				
				1754.3	20393	23.72	24	0				
				1710.7	19957	23.60	24	0				
	QPSK		0	1732.5	20175	23.73	24	0				
				1754.3	20393	23.78	24	0				
				1710.7	19957	23.71	24	0				
		3 RB	2	1732.5	20175	23.85	24	0				
				1754.3	20393	23.73	24	0				
				1710.7	19957	23.74	24	0				
			3	1732.5	20175	23.76	24	0				
				1754.3	20393	23.71	24	0				
				1710.7	19957	22.72	23	0-1				
		6F	RB	1732.5	20175	22.81	23	0-1				
1.4			•	1754.3	20393	22.75	23	0-1				
				1710.7	19957	22.37	23	0-1				
			0	1732.5	20175	22.81	23	0-1				
				1754.3	20393	22.19	23	0-1				
				1710.7	19957	22.30	23	0-1				
		1 RB	2	1732.5	20175	22.76	23	0-1				
				1754.3	20393	22.88	23	0-1				
				1710.7	19957	22.35	23					
			5	1732.5	20175	22.64	23					
				1754.3	20393	22.26	23					
				1710.7	19957	22.77	23	0-1				
	16-QAM		0	1732.5	20175	22.36	23	0-1				
				1754.3	20393	22.84	23	0-1				
				1710.7	19957	22.82	23	0-1				
		3 RB	2	1732.5	20175	22.50	23					
				1754.3	20393	22.89	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
			_	1710.7	19957	22.83	23					
			3	1732.5	20175	22.60	23					
				1754.3	20393	22.90	23					
				1710.7	19957	21.63	22					
		6F	RB	1732.5	20175	21.70	22					
		ONE	1754.3	20393	21.44	22	0-2					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 26 of 216

FDD Band 4 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1720	20050	15.04	15.5	0			
			0	1732.5	20175	14.56	15.5	0			
				1745	20300	14.57	15.5	0			
				1720	20050	15.45	15.5	0			
		1 RB	50	1732.5	20175	15.19	15.5	0			
				1745	20300	15.50	15.5	0			
				1720	20050	14.75	15.5	0			
			99	1732.5	20175	14.72	15.5	0			
				1745	20300	14.52	15.5	0			
				1720	20050	15.19	15.5	0			
	QPSK		0	1732.5	20175	13.81	15.5	0			
				1745	20300	14.53	15.5	0			
				1720	20050	15.07	15.5	0			
		50 RB	25	1732.5	20175	13.84	15.5	0			
				1745	20300	14.80	15.5				
				1720	20050	14.26	15.5	0			
			50	1732.5	20175	14.22	15.5	0			
				1745	20300	14.49	15.5				
				1720	20050	14.82	15.5				
		100	ORB	1732.5	20175	13.97	15.5				
20			1	1745	20300	14.42	15.5				
				1720 20050 15.07 15.5 0 1732.5 20175 14.04 15.5							
			0								
				1745	20300	14.23	15.5				
		4.00	50	1720	20050	15.35	15.5				
		1 RB	50	1732.5	20175	14.09	15.5				
				1745	20300	14.90	15.5				
			00	1720	20050	13.67	15.5				
			99	1732.5	20175	14.32	15.5				
			1	1745	20300	13.54	15.5				
	16 OAM		0	1720	20050	14.22	15.5				
	16-QAM		0	1732.5	20175	13.80	15.5				
				1745	20300	13.53	15.5				
		50 RB	25	1720	20050	14.07	15.5				
		OU KD	25	1732.5	20175	13.84	15.5	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
				1745 1720	20300 20050	13.87 13.54	15.5 15.5				
			50	1720	20050	13.54	15.5				
			30	1732.5	20300	13.56	15.5				
				1745	20050	13.83	15.5				
		100)RB	1732.5	20030	13.51	15.5				
	100F	,,,,,,	1732.3	20300	13.51	15.5					
				1740	20000	10.02	10.0	U			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_end_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this onlineful.

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 27 of 216

FDD Band 4 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1717.5	20025	14.87	15.5	0			
			0	1732.5	20175	14.87	15.5	0			
				1747.5	20325	14.87	15.5	0			
				1717.5	20025	15.45	15.5	0			
		1 RB	36	1732.5	20175	14.81	15.5	0			
				1747.5	20325	15.46	15.5	0			
				1717.5	20025	14.74	15.5	0			
			74	1732.5	20175	14.83	15.5	0			
				1747.5	20325	14.79	15.5	0			
				1717.5	20025	15.21	15.5	0			
	QPSK		0	1732.5	20175	13.64	15.5	0			
				1747.5	20325	14.77	15.5	0			
				1717.5	20025	15.38	15.5	0			
		36 RB	18	1732.5	20175	13.81	15.5	0			
				1747.5	20325	14.86	15.5	0			
				1717.5	20025	14.90	15.5	0			
			37	1732.5	20175	14.08	15.5	0			
				1747.5	20325	14.24	15.5	0			
				1717.5	20025	15.05	15.5	0			
		75	RB	1732.5	20175	13.84	15.5	0			
15				1747.5	20325	14.54	15.5	0 0 0 0 0 0 0 0 0			
10				1717.5	20025	14.74	15.5	0			
			0	1732.5	20175	14.23	15.5	0			
				1747.5	20325	14.76	15.5	0			
				1717.5	20025	15.38	15.5	0			
		1 RB	36	1732.5	20175	14.26	15.5	0			
				1747.5	20325	15.41	15.5	0			
				1717.5	20025	14.46	15.5	0			
			74	1732.5	20175	14.46	15.5	0			
				1747.5	20325	14.41	15.5	0			
				1717.5	20025	14.20	15.5	0			
	16-QAM		0	1732.5	20175	13.59	15.5	0			
				1747.5	20325	13.76	15.5	0			
				1717.5	20025	14.40	15.5	0			
		36 RB	18	1732.5	20175	13.83	15.5	0			
				1747.5	20325	13.90	15.5	0			
				1717.5	20025	13.96	15.5	0			
			37	1732.5	20175	13.57	15.5	0			
				1747.5	20325	13.62	15.5	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
				1717.5	20025	14.09	15.5				
	75	75	RB	1732.5	20175	13.68	15.5				
		TORE		1747.5	20325	13.59	15.5	0			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 28 of 216

FDD Band 4 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1715	20000	15.08	15.5	0			
			0	1732.5	20175	14.72	15.5	0			
				1750	20350	15.12	15.5	0			
				1715	20000	15.49	15.5	0			
		1 RB	25	1732.5	20175	14.70	15.5	0			
				1750	20350	15.07	15.5	0			
				1715	20000	15.49	15.5	0			
			49	1732.5	20175	14.54	15.5	0			
				1750	20350	14.50	15.5	0			
				1715	20000	15.24	15.5	0			
	QPSK		0	1732.5	20175	13.65	15.5	0			
				1750	20350	14.84	15.5	0			
				1715	20000	15.44	15.5	0			
		25 RB	12	1732.5	20175	13.79	15.5	0			
				1750	20350	14.55	15.5				
				1715	20000	15.37	15.5				
			25	1732.5	20175	14.01	15.5				
				1750	20350	13.93	15.5				
				1715	20000	15.27	15.5	0			
		50	RB	1732.5	20175	13.88	15.5	0			
10				1750	20350	14.41	15.5				
				1715	20000	15.42	15.5				
			0	1732.5	20175	13.86	15.5	0			
				1750	20350	14.93	15.5				
				1715	20000	14.31	15.5				
		1 RB	25	1732.5	20175	13.93	15.5				
				1750	20350	15.00	15.5				
				1715	20000	15.49	15.5				
			49	1732.5	20175	14.07	15.5				
				1750	20350	13.89	15.5				
			_	1715	20000	14.29	15.5				
	16-QAM		0	1732.5	20175	13.77	15.5				
				1750	20350	13.84	15.5	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
		05.55	40	1715	20000	14.47	15.5				
		25 RB	12	1732.5	20175	13.83	15.5	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
				1750	20350	13.52	15.5				
				1715	20000	14.46	15.5				
			25	1732.5	20175	13.97	15.5				
				1750	20350	13.97	15.5				
	50R		DD	1715	20000	14.33	15.5				
		KR	1732.5	20175	13.88	15.5					
[1750	20350	13.95	15.5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 29 of 216

FDD Band 4 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1712.5	19975	15.10	15.5	0			
			0	1732.5	20175	14.40	15.5	0			
				1752.5	20375	14.65	15.5	0			
				1712.5	19975	15.36	15.5	0			
		1 RB	12	1732.5	20175	14.76	15.5	0			
				1752.5	20375	14.98	15.5	0			
				1712.5	19975	15.47	15.5	0			
			24	1732.5	20175	14.57	15.5	0			
				1752.5	20375	14.45	15.5	0			
				1712.5	19975	15.01	15.5	0			
	QPSK		0	1732.5	20175	13.55	15.5	0			
				1752.5	20375	14.20	15.5	0			
				1712.5	19975	15.23	15.5	0			
		12 RB	6	1732.5	20175	13.71	15.5	0			
				1752.5	20375	13.94	15.5	0			
				1712.5	19975	15.34	15.5	0			
			13	1732.5	20175	13.90	15.5	0			
				1752.5	20375	13.60	15.5				
				1712.5	19975	15.19	15.5	0			
		25	RB	1732.5	20175	13.64	15.5	0			
5				1752.5	20375	13.80	15.5				
				1712.5	19975	15.13	15.5	.5 0 .5 0 .5 0 .5 0 .5 0 .5 0 .5 0 .5 0			
			0	1732.5	20175	13.99	15.5	0			
				1752.5	20375	14.29	15.5				
				1712.5	19975	14.73	15.5	0			
		1 RB	12	1732.5	20175	14.06	15.5				
				1752.5	20375	13.97	15.5				
				1712.5	19975	15.45	15.5				
			24	1732.5	20175	14.38	15.5				
				1752.5	20375	13.82	15.5				
			_	1712.5	19975	14.09	15.5				
	16-QAM		0	1732.5	20175	13.62	15.5	-			
				1752.5	20375	13.63	15.5				
		40.00		1712.5	19975	14.24	15.5				
		12 RB	6	1732.5	20175	13.71	15.5				
				1752.5	20375	13.89	15.5	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
			40	1712.5	19975	14.34	15.5				
			13	1732.5	20175	13.97	15.5				
				1752.5	20375	13.66	15.5	-			
	25RE		DD	1712.5	19975	14.22	15.5				
		KR	1732.5	20175	13.75	15.5					
				1752.5	20375	13.61	15.5	0			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 30 of 216

FDD Band 4 (Reduced Power)												
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1711.5	19965	15.33	15.5	0				
			0	1732.5	20175	14.56	15.5	0				
				1753.5	20385	14.62	15.5	0				
				1711.5	19965	15.26	15.5	0				
		1 RB	7	1732.5	20175	14.73	15.5	0				
				1753.5	20385	14.62	15.5	0				
				1711.5	19965	14.77	15.5	0				
			14	1732.5	20175	14.69	15.5	0				
				1753.5	20385	14.74	15.5	0				
				1711.5	19965	15.07	15.5	0				
	QPSK		0	1732.5	20175	13.64	15.5	0				
				1753.5	20385	13.75	15.5	0				
				1711.5	19965	15.13	15.5	0				
		8 RB	4	1732.5	20175	13.70	15.5	0				
				1753.5	20385	13.68	15.5	0				
				1711.5	19965	15.13	15.5	0				
			7	1732.5	20175	13.75	15.5	0				
				1753.5	20385	13.55	15.5	0				
				1711.5	19965	15.05	15.5	0				
		15	RB	1732.5	20175	13.73	15.5	0				
3				1753.5	20385	13.71	15.5	0				
J				1711.5	19965	15.19	15.5	0				
			0	1732.5	20175	13.85	15.5	0				
				1753.5	20385	14.12	15.5	0				
				1711.5	19965	15.33	15.5	0				
		1 RB	7	1732.5	20175	14.00	15.5	0				
				1753.5	20385	13.89	15.5	0				
				1711.5	19965	13.86	15.5					
			14	1732.5	20175	14.17	15.5	0				
				1753.5	20385	14.02	15.5	0				
				1711.5	19965	14.18	15.5	0				
	16-QAM		0	1732.5	20175	13.74	15.5	0				
				1753.5	20385	13.85	15.5	0				
				1711.5	19965	14.21	15.5	0				
		8 RB	4	1732.5	20175	13.80	15.5	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				1753.5	20385	13.87	15.5					
				1711.5	19965	14.09	15.5					
			7	1732.5	20175	13.85	15.5					
				1753.5	20385	13.69	15.5	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				1711.5	19965	14.12	15.5					
		15	RB	1732.5	20175	13.70	15.5					
									1753.5	20385	13.80	15.5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 31 of 216

	FDD Band 4 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1710.7	19957	15.08	15.5	0				
			0	1732.5	20175	14.67	15.5	0				
				1754.3	20393	14.67	15.5	0				
				1710.7	19957	15.46	15.5	0				
		1 RB	2	1732.5	20175	14.69	15.5	0				
				1754.3	20393	14.81	15.5	0				
				1710.7	19957	15.38	15.5	0				
			5	1732.5	20175	14.98	15.5	0				
				1754.3	20393	14.66	15.5	0				
				1710.7	19957	15.38	15.5	0				
	QPSK		0	1732.5	20175	14.79	15.5	0				
				1754.3	20393	14.97	15.5	0				
				1710.7	19957	15.49	15.5	0				
		3 RB	2	1732.5	20175	14.94	15.5	0				
				1754.3	20393	14.87	15.5	0				
				1710.7	19957	15.48	15.5	0				
			3	1732.5	20175	14.87	15.5	0				
				1754.3	20393	14.76	15.5	0				
				1710.7	19957	14.99	15.5	0				
		6F	RB	1732.5	20175	13.62	15.5	0				
1.4				1754.3	20393	13.57	15.5	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
17				1710.7	19957	15.02	15.5	0				
			0	1732.5	20175	13.52	15.5	0				
				1754.3	20393	13.95	15.5	0				
				1710.7	19957	15.45	15.5	0				
		1 RB	2	1732.5	20175	14.27	15.5	0				
				1754.3	20393	13.79	15.5					
				1710.7	19957	15.23	15.5					
			5	1732.5	20175	13.88	15.5					
				1754.3	20393	13.53	15.5	0				
				1710.7	19957	15.00	15.5	0				
	16-QAM		0	1732.5	20175	13.75	15.5	0				
				1754.3	20393	13.67	15.5					
				1710.7	19957	15.10	15.5					
		3 RB	2	1732.5	20175	13.91	15.5	Allowed per 3GPP(dB) O O O O O O O O O O O O O O O O O O				
				1754.3	20393	13.67	15.5					
				1710.7	19957	15.07	15.5					
			3	1732.5	20175	13.87	15.5					
				1754.3	20393	13.61	15.5	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				1710.7	19957	13.94	15.5					
	6R	6F	₹B	1732.5	20175	13.79	15.5					
			1754.3	20393	13.82	15.5	0					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 32 of 216

FDD Band 7 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				2510	20850	22.30	24	0			
			0	2535	21100	22.63	24	0			
				2560	21350	22.69	24	0			
				2510	20850	23.21	24	0			
		1 RB	50	2535	21100	23.01	24	0			
				2560	21350	23.36	24	0			
				2510	20850	23.23	24	0			
			99	2535	21100	22.79	24	0			
				2560	21350	23.05	24	0			
				2510	20850	21.94	23	0-1			
	QPSK		0	2535	21100	22.10	23	0-1			
				2560	21350	22.07	23	0-1			
				2510	20850	22.03	23	0-1			
		50 RB	25	2535	21100	22.11	23	0-1			
				2560	21350	22.08	23	0-1			
				2510	20850	22.04	23	0-1			
			50	2535	21100	22.08	23	0-1			
				2560	21350	22.23	23	0-1			
				2510	20850	22.03	23	0-1			
		100	ORB	2535	21100	22.11	23	0-1			
20				2560	21350	22.16	23	0-1			
20				2510	20850	21.79	23	0-1			
			0	2535	21100	21.35	23	0-1			
				2560	21350	21.88	23	0-1			
				2510	20850	21.97	23	0-1			
		1 RB	50	2535	21100	21.88	23	0-1			
				2560	21350	22.06	23	0-1			
				2510	20850	21.72	23	0-1			
			99	2535	21100	22.20	23	0-1			
				2560	21350	21.57	23	0-1			
				2510	20850	20.92	22	0-2			
	16-QAM		0	2535	21100	21.09	22	0-2			
				2560	21350	20.89	22	0-2			
				2510	20850	21.03	22	0-2			
		50 RB	25	2535	21100	21.06	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1			
				2560	21350	21.23	22	0-2			
				2510	20850	21.05	22	0-2			
			50	2535	21100	21.19	22	0-2			
				2560	21350	21.18	22	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
				2510	20850	21.04	22	0-2			
	100F	ORB	2535	21100	21.07	22	0-2				
			2560	21350	21.09	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 33 of 216

FDD Band 7 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				2507.5	20825	22.81	24	0			
			0	2535	21100	22.87	24	0			
				2562.5	21375	22.74	24	0			
				2507.5	20825	22.85	24	0			
		1 RB	36	2535	21100	23.02	24	0			
				2562.5	21375	22.92	24	0			
				2507.5	20825	23.06	24	0			
			74	2535	21100	23.18	24	0			
				2562.5	21375	23.24	24	0			
				2507.5	20825	21.94	23	0-1			
	QPSK		0	2535	21100	22.10	23	0-1			
				2562.5	21375	22.22	23	0-1			
				2507.5	20825	21.97	23	0-1			
		36 RB	18	2535	21100	22.08	23	0-1			
				2562.5	21375	22.23	23	0-1			
				2507.5	20825	22.11	23	0-1			
			37	2535	21100	22.19	23	0-1			
				2562.5	21375	22.16	23	0-1			
				2507.5	20825	21.99	23	0-1			
		75	RB	2535	21100	22.12	23	0-1			
15				2562.5	21375	22.19	23	0-1			
10				2507.5	20825	21.87	23	0-1			
			0	2535	21100	21.68	23	0-1			
				2562.5	21375	22.00	23	0-1			
				2507.5	20825	22.00	23	0-1			
		1 RB	36	2535	21100	21.75	23	0-1			
				2562.5	21375	22.05	23	0-1			
				2507.5	20825	22.15	23	0-1			
			74	2535	21100	22.13	23	0-1			
				2562.5	21375	22.18	23	0-1			
				2507.5	20825	21.08	22	0-2			
	16-QAM		0	2535	21100	21.06	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
				2562.5	21375	21.21	22	0-2			
				2507.5	20825	20.92	22	0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-			
		36 RB	18	2535	21100	20.97	22	0-2			
				2562.5	21375	21.05	22	0-2			
				2507.5	20825	21.11	22	0-2 0-2 0-2 0-2 0-2 0-2			
			37	2535	21100	21.07	22	0-2			
				2562.5	21375	21.18	22	0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1			
				2507.5	20825	21.04	22	0-2			
	75	75	RB	2535	21100	21.16	22	0-2			
			2562.5	21375	21.14	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 34 of 216

	FDD Band 7 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				2505	20800	22.74	24	0				
			0	2535	21100	22.70	24	0				
				2565	21400	22.88	24	0				
				2505	20800	22.90	24	0				
		1 RB	25	2535	21100	22.99	24	0				
				2565	21400	23.12	24	0				
				2505	20800	22.89	24	0				
			49	2535	21100	22.77	24	0				
				2565	21400	22.94	24	0				
				2505	20800	21.98	23	0-1				
	QPSK		0	2535	21100	22.11	23	0-1				
				2565	21400	22.20	23	0-1				
				2505	20800	21.97	23	0-1				
		25 RB	12	2535	21100	22.12	23	0-1				
				2565	21400	22.21	23	0-1				
				2505	20800	21.98	23	0-1				
			25	2535	21100	22.12	23	0-1				
				2565	21400	22.15	23	0-1				
				2505	20800	22.04	23	0-1				
		50	RB	2535	21100	22.09	23	0-1				
10			T	2565	21400	22.25	23	0-1 0-1 0-1 0-1 0-1 0-1				
			0	2505	20800	21.98	23					
			0	2535	21100	21.88	23					
				2565	21400	21.91	23					
				2505	20800	21.91	23					
		1 RB	25	2535	21100	22.28	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-				
				2565	21400	21.83	23					
				2505	20800	22.11	23					
			49	2535	21100	22.16	23					
				2565	21400	21.94	23					
	40.044			2505	20800	21.00	22					
	16-QAM		0	2535	21100	21.24	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-				
				2565	21400	21.13	22					
		05.00	40	2505	20800	21.03	22					
		25 RB	12	2535	21100	21.21	22	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-				
				2565	21400	21.09	22					
			25	2505	20800	21.02	22					
			25	2535	21100	21.24	22					
				2565	21400	21.21	22	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1				
			DD	2505	20800	20.97	22					
	5	50	RB	2535	21100	21.11	22					
				2565	21400	21.07	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 35 of 216

	FDD Band 7 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				2502.5	20775	22.34	24	0				
			0	2535	21100	22.62	24	0				
				2567.5	21425	22.78	24	0				
				2502.5	20775	23.00	24	0				
		1 RB	12	2535	21100	23.16	24	0				
				2567.5	21425	22.98	24	0				
				2502.5	20775	22.80	24	0				
			24	2535	21100	22.81	24	0				
				2567.5	21425	22.76	24	0				
				2502.5	20775	21.96	23	0-1				
	QPSK		0	2535	21100	22.04	23	0-1				
				2567.5	21425	22.11	23	0-1				
				2502.5	20775	21.96	23	0-1				
		12 RB	6	2535	21100	22.01	23	0-1				
				2567.5	21425	22.20	23	0-1				
				2502.5	20775	21.95	23	0-1				
			13	2535	21100	22.03	23	0-1				
				2567.5	21425	22.08	23	0-1				
				2502.5	20775	21.98	23	0-1				
		25	RB	2535	21100	22.11	23	0-1				
5				2567.5	21425	22.07	23	0-1 0-1 0-1 0-1 0-1				
				2502.5	20775	22.24	23	0-1				
			0	2535	21100	21.70	23	0-1				
				2567.5	21425	22.06	23	0-1				
				2502.5	20775	21.57	23	0-1				
		1 RB	12	2535	21100	21.54	23	0-1				
				2567.5	21425	21.44	23	0-1				
				2502.5	20775	21.58	23	0-1				
			24	2535	21100	21.73	23	0-1				
				2567.5	21425	21.79	23	0-1				
				2502.5	20775	20.95	22	0-2				
	16-QAM		0	2535	21100	21.07	22	0-2				
				2567.5	21425	21.06	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				2502.5	20775	21.04	22					
		12 RB	6	2535	21100	20.96	22	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1				
				2567.5	21425	21.06	22					
				2502.5	20775	21.01	22	0-2				
			13	2535	21100	21.14	22	0-2				
				2567.5	21425	21.10	22	0-2				
				2502.5	20775	21.15	22	0-2				
		25	RB	2535	21100	20.98	22					
				2567.5	21425	21.23	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sgs.com



Page: 36 of 216

FDD Band 7 (Reduced Power)								
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
20	QPSK	1 RB	0	2510	20850	14.81	15.5	0
				2535	21100	14.89	15.5	0
				2560	21350	14.78	15.5	0
			50	2510	20850	15.15	15.5	0
				2535	21100	15.39	15.5	0
				2560	21350	15.30	15.5	0
			99	2510	20850	15.19	15.5	0
				2535	21100	15.17	15.5	0
				2560	21350	15.24	15.5	0
		50 RB	0	2510	20850	14.00	15.5	0
				2535	21100	14.34	15.5	0
				2560	21350	14.17	15.5	0
			25	2510	20850	14.16	15.5	0
				2535	21100	14.33	15.5	0
				2560	21350	14.48	15.5	0
			50	2510	20850	14.14	15.5	0
				2535	21100	14.26	15.5	0
				2560	21350	14.48	15.5	0
		100RB		2510	20850	14.17	15.5	0
				2535	21100	14.23	15.5	0
				2560	21350	14.32	15.5	0
	16-QAM	1 RB	0	2510	20850	14.14	15.5	0
				2535	21100	14.12	15.5	0
				2560	21350	14.07	15.5	0
			50	2510	20850	14.05	15.5	0
				2535	21100	14.08	15.5	0
				2560	21350	14.00	15.5	0
			99	2510	20850	13.98	15.5	0
				2535	21100	13.47	15.5	0
				2560	21350	13.73	15.5	0
		50 RB	0	2510	20850	13.04	15.5	0
				2535	21100	13.42	15.5	0
				2560	21350	13.18	15.5	0
			25	2510	20850	13.16	15.5	0
				2535	21100	13.34	15.5	0
				2560	21350	13.50	15.5	0
			50	2510	20850	13.21	15.5	0
				2535	21100	13.28	15.5	0
				2560	21350	13.54	15.5	0
		100RB		2510	20850	13.17	15.5	0
				2535	21100	13.23	15.5	0
				2560	21350	13.35	15.5	0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 37 of 216

	FDD Band 7 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				2507.5	20825	15.21	15.5	0				
			0	2535	21100	15.14	15.5	0				
				2562.5	21375	15.22	15.5	0				
				2507.5	20825	15.24	15.5	0				
		1 RB	36	2535	21100	15.23	15.5	0				
				2562.5	21375	15.15	15.5	0				
				2507.5	20825	15.14	15.5	0				
			74	2535	21100	15.30	15.5	0				
				2562.5	21375	15.22	15.5	0				
				2507.5	20825	14.96	15.5	0				
	QPSK		0	2535	21100	14.43	15.5	0				
				2562.5	21375	14.40	15.5	0				
				2507.5	20825	14.21	15.5	0				
		36 RB	18	2535	21100	14.31	15.5	0				
				2562.5	21375	14.60	15.5	0				
				2507.5	20825	14.26	15.5	0				
			37	2535	21100	14.29	15.5	0				
				2562.5	21375	14.57	15.5	0				
				2507.5	20825	14.12	15.5	0				
		75	RB	2535	21100	14.33	15.5	0				
15				2562.5	21375	14.53	15.5	0				
10				2507.5	20825	14.36	15.5	0 0 0 0 0 0 0 0 0 0 0 0 0 0				
			0	2535	21100	14.89	15.5	0				
				2562.5	21375	14.48	15.5	0				
				2507.5	20825	14.01	15.5	0				
		1 RB	36	2535	21100	14.50	15.5	0				
				2562.5	21375	14.75	15.5	0				
				2507.5	20825	14.73	15.5	0				
			74	2535	21100	14.38	15.5	0				
				2562.5	21375	14.50	15.5	0				
				2507.5	20825	12.99	15.5	0				
	16-QAM		0	2535	21100	13.52	15.5	0				
				2562.5	21375	13.40	15.5	0				
				2507.5	20825	13.21	15.5	0				
		36 RB	18	2535	21100	13.33	15.5	0				
				2562.5	21375	13.67	15.5	0				
				2507.5	20825	13.26	15.5	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
			37	2535	21100	13.36	15.5					
				2562.5	21375	13.60	15.5	0				
				2507.5	20825	13.13	15.5	5 0 0 0 5 0 0 0 0 5 0				
		75	RB	2535	21100	13.32	15.5					
				2562.5	21375	13.57	15.5	0				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 38 of 216

FDD Band 7 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				2505	20800	15.00	15.5	0			
			0	2535	21100	14.97	15.5	0			
				2565	21400	15.06	15.5	0			
				2505	20800	14.89	15.5	0			
		1 RB	25	2535	21100	15.08	15.5	0			
				2565	21400	15.30	15.5	0			
				2505	20800	14.92	15.5	0			
			49	2535	21100	15.08	15.5	0			
				2565	21400	14.92	15.5	0			
				2505	20800	14.01	15.5	0			
	QPSK		0	2535	21100	14.44	15.5	0			
				2565	21400	14.53	15.5	0			
				2505	20800	14.07	15.5	0			
		25 RB	12	2535	21100	14.26	15.5	0			
				2565	21400	14.55	15.5	0			
				2505	20800	14.59	15.5	0			
			25	2535	21100	14.28	15.5	0			
				2565	21400	14.48	15.5	0			
				2505	20800	14.06	15.5	0			
		50	RB	2535	21100	14.34	15.5	0			
10				2565	21400	14.51	15.5	0			
10				2505	20800	14.10	15.5	0			
			0	2535	21100	14.54	15.5	0			
				2565	21400	14.45	15.5	0			
				2505	20800	14.59	15.5	0			
		1 RB	25	2535	21100	14.81	15.5	0			
				2565	21400	14.72	15.5	0			
				2505	20800	13.91	15.5	0			
			49	2535	21100	14.74	15.5	0			
				2565	21400	14.35	15.5	0			
				2505	20800	13.03	15.5	0			
	16-QAM		0	2535	21100	13.53	15.5	0			
				2565	21400	13.50	15.5	0			
				2505	20800	13.03	15.5	0			
		25 RB	12	2535	21100	13.32	15.5	0			
				2565	21400	13.59	15.5	0			
				2505	20800	13.09	15.5	0			
			25	2535	21100	13.38	15.5	0			
				2565	21400	13.51	15.5	0			
				2505	20800	13.11	15.5	0			
		50	RB	2535	21100	13.34	15.5	0			
				2565	21400	13.58	15.5	0			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 39 of 216

FDD Band 7 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				2502.5	20775	14.82	15.5	0			
			0	2535	21100	15.03	15.5	0			
				2567.5	21425	14.77	15.5	0			
				2502.5	20775	14.82	15.5	0			
		1 RB	12	2535	21100	15.25	15.5	0			
				2567.5	21425	15.00	15.5	0			
				2502.5	20775	14.86	15.5	0			
			24	2535	21100	15.09	15.5	0			
				2567.5	21425	14.93	15.5	0			
				2502.5	20775	14.01	15.5	0			
	QPSK		0	2535	21100	14.28	15.5	0			
				2567.5	21425	14.46	15.5	0			
				2502.5	20775	14.03	15.5	0			
		12 RB	6	2535	21100	14.26	15.5	0			
				2567.5	21425	14.51	15.5	0			
				2502.5	20775	14.08	15.5	0			
			13	2535	21100	14.19	15.5	0			
				2567.5	21425	14.33	15.5	0			
				2502.5	20775	14.14	15.5	0			
		25	RB	2535	21100	14.24	15.5	0			
5				2567.5	21425	14.39	15.5	0			
				2502.5	20775	14.18	15.5	0			
			0	2535	21100	14.19	15.5	0			
				2567.5	21425	14.26	15.5	0			
				2502.5	20775	14.17	15.5	0			
		1 RB	12	2535	21100	14.53	15.5	0			
				2567.5	21425	14.53	15.5	0			
				2502.5	20775	14.11	15.5	0			
			24	2535	21100	14.06	15.5	0			
				2567.5	21425	13.91	15.5	0			
				2502.5	20775	13.02	15.5	0			
	16-QAM		0	2535	21100	13.36	15.5	0			
				2567.5	21425	13.52	15.5	0			
				2502.5	20775	13.04	15.5	0			
		12 RB	6	2535	21100	13.35	15.5	0			
				2567.5	21425	13.53	15.5	0			
				2502.5	20775	12.94	15.5	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
			13	2535	21100	13.24	15.5				
				2567.5	21425	13.30	15.5	0			
	25RE			2502.5	20775	12.97	15.5				
		RB	2535	21100	13.30	15.5					
				2567.5	21425	13.44	15.5	0			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 40 of 216

	FDD Band 12 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				704	23060	22.63	24	0				
			0	707.5	23095	22.72	24	0				
				711	23130	22.93	24	0				
				704	23060	23.39	24	0				
		1 RB	25	707.5	23095	23.52	24	0				
				711	23130	23.42	24	0				
				704	23060	23.04	24	0				
			49	707.5	23095	22.96	24	0				
				711	23130	22.79	24	0				
				704	23060	22.15	23	0-1				
	QPSK		0	707.5	23095	22.09	23	0-1				
				711	23130	22.28	23	0-1				
				704	23060	22.17	23	0-1				
		25 RB	12	707.5	23095	22.27	23	0-1				
				711	23130	22.26	23	0-1				
				704	23060	22.32	23	0-1				
			25	707.5	23095	22.21	23	0-1				
				711	23130	22.27	23	0-1				
				704	23060	22.30	23	0-1				
		50	RB	707.5	23095	22.24	23	0-1				
10				711	23130	22.24	23	0-1				
10				704	23060	21.60	23	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1				
			0	707.5	23095	21.95	23	0-1				
				711	23130	22.12	23	0-1				
				704	23060	22.24	23	0-1				
		1 RB	25	707.5	23095	21.94	23	0-1				
				711	23130	22.19	23	0-1				
				704	23060	Conducted power (dBm) 22.63 24 0 22.72 24 0 22.93 24 0 23.39 24 0 23.52 24 0 23.42 24 0 23.42 24 0 22.96 24 0 22.96 24 0 22.79 24 0 22.15 23 0-1 22.28 23 0-1 22.28 23 0-1 22.27 23 0-1 22.27 23 0-1 22.27 23 0-1 22.27 23 0-1 22.27 23 0-1 22.27 23 0-1 22.27 23 0-1 22.27 23 0-1 22.27 23 0-1 22.27 23 0-1 22.27 23 0-1 22.27 23 0-1 22.28 23 0-1 22.27 23 0-1 22.29 23 0-1 22.21 23 0-1 22.21 23 0-1 22.21 23 0-1 22.21 23 0-1 22.24 23 0-1						
			49	707.5	23095	21.90	23	0-1				
				711	23130	21.79	23	0-1				
				704	23060	21.34	22	0-2				
	16-QAM		0	707.5	23095	21.09	22	0-2				
				711	23130	21.50		0-2				
				704	23060	21.15	22	0-2				
		25 RB	12	707.5	23095	21.23	22	0-2				
				711	23130	21.30	22	0-2				
				704	23060	21.35	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-				
			25	707.5	23095	21.14	22	0-2				
				711	23130	21.14	22	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1				
				704	23060	21.16	22	0-2				
		50	RB	707.5	23095	21.20	22	0-2				
			555		23130	21.25	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 41 of 216

FDD Band 12 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				701.5	23035	22.64	24	0			
			0	707.5	23095	22.92	24	0			
				713.5	23155	22.76	24	0			
				701.5	23035	23.16	24	0			
		1 RB	12	707.5	23095	23.60	24	0			
				713.5	23155	23.47	24	0			
				701.5	23035	22.87	24	0			
			24	707.5	23095	22.86	24	0			
				713.5	23155	22.82	24	0			
				701.5	23035	22.18	23	0-1			
	QPSK		0	707.5	23095	22.26	23	0-1			
				713.5	23155	22.18	23	0-1			
				701.5	23035	22.35	23	0-1			
		12 RB	6	707.5	23095	22.35	23	0-1			
				713.5	23155	22.25	23	0-1			
				701.5	23035	22.20	23	0-1			
			13	707.5	23095	22.24	23	0-1			
				713.5	23155	22.16	23	0-1			
				701.5	23035	22.17	23	0-1			
		25	RB	707.5	23095	22.27	23	0-1			
5				713.5	23155	22.14	23	0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-			
Ŭ				701.5	23035	21.56	23	0-1			
			0	707.5	23095	22.07	23	Power + Max. MPR Allowed per 3GPP(dB) Tolerance (dBm) 4 24 0 23 0-1 23 0-1 23 0-1 23 0-1 23 0-1 23 0-1 23 0-1 23 0-1			
				713.5	23155	21.79	23	0-1			
				701.5	23035	21.57	23	0-1			
		1 RB	12	707.5	23095	21.93	23	0-1			
				713.5	23155	21.63					
				701.5	23035	21.77	23	0-1			
			24	707.5	23095	21.79	23	0-1			
				713.5	23155	21.71					
				701.5	23035	21.07					
	16-QAM		0	707.5	23095	21.30	22	0-2			
1				713.5	23155	21.27					
1				701.5	23035	21.31		0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
		12 RB	6	707.5	23095	21.20					
1				713.5	23155	21.27					
1				701.5	23035	21.16					
1			13	707.5	23095	21.23		3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1			
				713.5	23155	21.18					
1				701.5	23035	21.31					
		25	RB	707.5 713.5	23095	21.38					
								23155	21.15	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 42 of 216

	FDD Band 12 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				700.5	23025	22.76	24	0				
			0	707.5	23095	23.00	24	0				
				714.5	23165	23.17	24	0				
				700.5	23025	23.07	24	0				
		1 RB	7	707.5	23095	23.18	24	0				
				714.5	23165	23.36	24	0				
				700.5	23025	23.01	24	0				
			14	707.5	23095	23.05	24	0				
				714.5	23165	22.98	24	0				
				700.5	23025	22.08	23	0-1				
	QPSK		0	707.5	23095	22.28	23	0-1				
				714.5	23165	22.25	23	0-1				
				700.5	23025	22.14	23	0-1				
		8 RB	4	707.5	23095	22.18	23	0-1				
				714.5	23165	22.18	23	0-1				
				700.5	23025	22.03	23	0-1				
			7	707.5	23095	22.28	23	0-1				
				714.5	23165	22.14	23	0-1				
				700.5	23025	21.99	23	0-1				
		15	RB	707.5	23095	22.17	23	0-1				
3				714.5	23165	22.19	23	0-1				
				700.5	23025	21.68	23	0-1				
			0	707.5	23095	21.95	23	0-1				
				714.5	23165	21.64	23	0-1				
				700.5	23025	21.74	23	0-1				
		1 RB	7	707.5	23095	22.17	23	0-1				
				714.5	23165	22.14	23	0-1				
				700.5	23025	22.01	23	0-1				
			14	707.5	23095	22.10	23	0-1				
				714.5	23165	22.12	23	0-1				
				700.5	23025	21.07	22	0-2				
	16-QAM		0	707.5	23095	21.22	22	0-2				
				714.5	23165	21.15	22	0-2				
				700.5	23025	21.06	22	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1				
		8 RB	4	707.5	23095	21.19	22					
				714.5	23165	21.30	22					
				700.5	23025	21.19	22					
			7	707.5	23095	21.17	22	0-2				
				714.5	23165	21.19	22	0-2				
				700.5	23025	21.04	22	0-2				
	15F	RB	707.5	23095	21.28	22						
				714.5	23165	21.09	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 43 of 216

FDD Band 12 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				699.7	23017	22.85	24	0			
			0	707.5	23095	23.17	24	0			
				715.3	23173	23.08	24	0			
				699.7	23017	23.01	24	0			
		1 RB	2	707.5	23095	23.29	24	0			
				715.3	23173	23.16	24	0			
				699.7	23017	23.00	24	0			
			5	707.5	23095	22.96	24	0			
				715.3	23173	23.09	24	0			
				699.7	23017	22.99	24	0			
	QPSK		0	707.5	23095	23.25	24	0			
				715.3	23173	23.32	24	0			
				699.7	23017	23.06	24	0			
		3 RB	2	707.5	23095	23.13	24	0			
				715.3	23173	23.24	24	0			
				699.7	23017	23.18	24	0			
			3	707.5	23095	23.22	24	0			
				715.3	23173	23.23	24	0			
				699.7	23017	22.06	23	0-1			
		6F	RB	707.5	23095	22.17	23	0-1			
1.4				715.3	23173	22.17	23	0-1			
				699.7	23017	21.48	23	0-1			
			0	707.5	23095	22.08	23	0-1			
				715.3	23173	21.76	23	0-1			
			_	699.7	23017	21.83	23	0-1			
1		1 RB	2	707.5	23095	21.85	23	0-1			
				715.3	23173	22.17	23	0-1			
1			_	699.7	23017	21.71	23	0-1			
			5	707.5	23095	22.16	23	0-1			
1				715.3	23173	21.85	23	0-1			
	100011			699.7	23017	22.14	23	0-1			
	16-QAM		0	707.5	23095	21.99	23	0-1			
				715.3	23173	22.07	23	0-1			
		2 00	_	699.7	23017	22.32	23	0-1			
		3 RB	2	707.5	23095	21.98	23	0-1			
				715.3	23173	22.17	23	0-1			
			2	699.7	23017	22.16	23	0-1			
1			3	707.5	23095	21.88	23	0-1			
				715.3	23173	22.28	23	0-1			
		er	OD.	699.7	23017	20.81	22	0-2			
		61	RB	707.5	23095	20.90	22	0-2			
				715.3	23173	21.16	22	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 44 of 216

FDD Band 12 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				704	23060	17.82	18	0			
			0	707.5	23095	17.78	18	0			
				711	23130	17.81	18	0			
				704	23060	17.99	18	0			
		1 RB	25	707.5	23095	17.89	18	0			
				711	23130	17.87	18	0			
				704	23060	17.95	18	0			
			49	707.5	23095	17.70	18	0			
				711	23130	17.96	18	0			
				704	23060	17.23	18	0			
	QPSK		0	707.5	23095	17.23	18	0			
				711	23130	17.23	18	0			
				704	23060	17.20	18	0			
		25 RB	12	707.5	23095	17.14	18	0			
				711	23130	17.12	18	0			
				704	23060	17.25	18	0			
			25	707.5	23095	17.16	18	0			
				711	23130	17.10	18	0			
				704	23060	17.18	18	0			
		50	RB	707.5	23095	17.17	18	0			
10				711	23130	17.14	18	0			
10				704	23060	16.80	18	0			
			0	707.5	23095	17.12	18	0			
				711	23130	16.79	18	0			
				704	23060	16.98	18	0			
		1 RB	25	707.5	23095	17.07	18	0			
				711	23130	17.15	18	0			
				704	23060	16.53	18	0			
			49	707.5	23095	16.97	18	0			
				711	23130	16.71	18	0			
				704	23060	16.09	18	0			
	16-QAM		0	707.5	23095	16.01	18	0			
				711	23130	16.47	18	0			
				704	23060	16.12	18	0			
		25 RB	12	707.5	23095	16.02	18	0			
				711	23130	16.22	18	0			
				704	23060	16.22	18	0			
			25	707.5	23095	16.17	18	0			
				711	23130	16.03	18	0			
			704	23060	16.22	18	0				
		50RI	RB	707.5	23095	16.12	18	0			
				711	23130	16.10	18	0			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 45 of 216

FDD Band 12 (Reduced Power)										
			, DD Dai	IS 12 (NOGGOE	a / owoi)		Target			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				701.5	23035	17.73	18	0		
			0	707.5	23095	17.91	18	0		
				713.5	23155	17.51	18	0		
				701.5	23035	17.92	18	0		
		1 RB	12	707.5	23095	17.94	18	0		
				713.5	23155	17.88	18	0		
				701.5	23035	17.94	18	0		
			24	707.5	23095	17.76	18	0		
				713.5	23155	17.55	18	0		
				701.5	23035	17.28	18	0		
	QPSK		0	707.5	23095	17.18	18	0		
				713.5	23155	17.01	18	0		
				701.5	23035	17.34	18	0		
		12 RB	6	707.5	23095	17.23	18	0		
				713.5	23155	17.09	18			
				701.5	23035	17.24	18	0		
			13	707.5	23095	17.17	18	0		
				713.5	23155	16.87	18			
				701.5	23035	17.25	18			
		25	RB	707.5	23095	17.19				
5			1	713.5	23155	16.96				
				701.5	23035	16.96		18 0 18 0 18 0 18 0		
			0	707.5	23095	16.45				
				713.5	23155	17.04	18			
		4.00	40	701.5	23035	16.96	18			
		1 RB	12	707.5	23095	17.52	18			
				713.5	23155	16.93	18			
			0.4	701.5	23035	17.26	18			
			24	707.5	23095	16.97	18			
				713.5	23155	16.78	18 18			
	16-QAM		_	701.5	23035	16.17				
	10-QAIVI		0	707.5	23095	16.22	18			
				713.5	23155	16.05	18	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
		12 RB	6	701.5 707.5	23035 23095	16.31 16.26	18 18			
		IZ ND		707.5	23155	16.26	18			
				713.5	23035	16.07	18			
			13	701.5	23035		18			
			13	707.5	23155	16.19 16.09	18			
				713.5	23035	16.09	18			
		25	RB	701.5	23095	16.14	18			
	25R		713.5	23155	16.01	18				
				1 10.0	20100	10.01	10			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 46 of 216

	FDD Band 12 (Reduced Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				700.5	23025	17.83	18	0				
			0	707.5	23095	17.78	18	0				
				714.5	23165	17.92	18	0				
				700.5	23025	17.96	18	0				
		1 RB	7	707.5	23095	17.92	18	0				
				714.5	23165	17.85	18	0				
				700.5	23025	17.88	18	0				
			14	707.5	23095	17.74	18	0				
				714.5	23165	17.86	18	0				
				700.5	23025	17.16	18	0				
	QPSK		0	707.5	23095	17.29	18	0				
				714.5	23165	17.19	18	0				
				700.5	23025	17.25	18	0				
		8 RB	4	707.5	23095	17.17	18	0				
				714.5	23165	16.99	18	0				
				700.5	23025	17.16	18	0				
			7	707.5	23095	17.18	18	0				
				714.5	23165	16.95	18	0				
				700.5	23025	17.23	18	0				
		15	RB	707.5	23095	17.09	18	0				
3			T	714.5	23165	16.92	18	0				
				700.5	23025	16.92	18	0				
			0	707.5	23095	16.87	18	0				
				714.5	23165	16.57	18	0				
			_	700.5	23025	16.91	18	0				
		1 RB	7	707.5	23095	17.17	18	0				
				714.5	23165	16.83	18	0				
				700.5	23025	17.60	18	0				
			14	707.5	23095	17.00	18	0				
				714.5	23165	16.95	18	0				
	40.044			700.5	23025	16.18	18	0				
1	16-QAM		0	707.5	23095	16.31	18	0				
1				714.5	23165	16.33	18	0				
		0.55	_	700.5	23025	16.14	18	0				
1		8 RB	4	707.5	23095	16.25	18	0				
1				714.5	23165	16.09	18	0				
1			_	700.5	23025	16.27	18	0				
1			7	707.5	23095	16.26	18	0				
1				714.5	23165	16.22	18	0				
			DD	700.5	23025	16.21	18	0				
1		15RB	707.5	23095	16.07	18	0					
					714.5	23165	16.10	18	0			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 47 of 216

FDD Band 12 (Reduced Power)										
			, DD Dai	IG 12 (NOUGCE	a / 04401)		Toract			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				699.7	23017	18.00	18	0		
			0	707.5	23095	17.92	18	0		
				715.3	23173	17.90	18	0		
				699.7	23017	17.88	18	0		
		1 RB	2	707.5	23095	17.81	18	0		
				715.3	23173	17.97	18	0		
				699.7	23017	17.86	18	0		
			5	707.5	23095	17.92	18	0		
				715.3	23173	17.88	18	0		
				699.7	23017	17.84	18	0		
	QPSK		0	707.5	23095	17.84	18	0		
				715.3	23173	17.96	18	0		
				699.7	23017	17.81	18	0		
		3 RB	2	707.5	23095	17.93	18	0		
				715.3	23173	17.91	18			
				699.7	23017	17.77	18	0		
			3	707.5	23095	17.66	18	0		
				715.3	23173	17.94	18	0		
				699.7	23017	17.13	18	0		
		6F	RB	707.5	23095	17.10	18	0		
1.4			T	715.3	23173	16.95	18	0		
				699.7	23017	17.11	18	0		
			0	707.5	23095	17.10	18			
				715.3	23173	16.99	18			
				699.7	23017	16.94	18			
		1 RB	2	707.5	23095	16.82	18			
1				715.3	23173	16.94	18	0		
				699.7	23017	17.28	18			
			5	707.5	23095	17.04	18			
				715.3	23173	16.35	18			
1	100011			699.7	23017	17.28	18			
1	16-QAM		0	707.5	23095	17.07	18			
1				715.3	23173	16.79	18			
1		0.00		699.7	23017	16.96	18			
1		3 RB	2	707.5	23095	17.16	18			
1				715.3	23173	16.95	18			
1			_	699.7	23017	17.48	18	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
1			3	707.5	23095	17.15	18			
1				715.3	23173	16.96	18			
1		25	D D	699.7	23017	16.32	18			
		6H	₹B	707.5	23095	16.13	18			
					715.3	23173	16.09	18	0	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_end_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this onlineful and offenders may be

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 48 of 216

		FDD Band 13 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)					
			0	782	23230	22.89	24	0					
		1 RB	25	782	23230	23.22	24	0					
			49	782	23230	23.13	24	0					
	QPSK		0	782	23230	22.28	23	0-1					
		25 RB	12	782	23230	22.19	23	0-1					
			25	782	23230	22.17	23	0-1					
10		50	RB	782	23230	22.18	23	0-1					
			0	782	23230	21.53	23	0-1					
		1 RB	25	782	23230	21.64	23	0-1					
			49	782	23230	22.12	23	0-1					
	16-QAM		0	782	23230	21.18	22	0-2					
		25 RB	12	782	23230	21.28	22	Allowed per 3GPP(dB) 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1					
			25	782	23230	21.27	22	0-2					
		50	RB	782	23230	20.94	22	0-2					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 49 of 216

			FDD E	Band 13 (Full F	Power)						
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				779.5	23205	22.61	24	0			
			0	782	23230	23.05	24	0			
				784.5	23255	22.77	24	0			
				779.5	23205	23.27	24	0			
		1 RB	12	782	23230	23.43	24	24 0 24 0 24 0 24 0 24 0 24 0 24 0 24 0 23 0-1			
				784.5	23255	23.36	24	0			
				779.5	23205	22.79	24	0			
			24	782	23230	22.90	24	0			
				784.5	23255	22.70	24	0			
				779.5	23205	22.21	23	0-1			
	QPSK		0	782	23230	22.30	23	0-1			
				784.5	23255	22.28	23	0-1			
				779.5	23205	22.26	23	0-1			
		12 RB	6	782	23230	22.30	23	0-1			
				784.5	23255	22.29	23	0-1			
				779.5	23205	22.22	23	0-1			
			13	782	23230	22.25	23	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1			
				784.5	23255	22.16	23	0-1			
				779.5	23205	22.21	23	0-1 0-1 0-1 0-1 0-1 0-1 0-1			
		25	RB	782	23230	22.28	23	0-1			
5			•	784.5	23255	22.24	23	0-1			
				779.5	23205	21.67		0-1			
			0	782	23230	21.75	23	0-1			
				784.5	23255	22.22	23	0-1			
				779.5	23205	21.97		0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1			
		1 RB	12	782	23230	22.43	23	0-1			
				784.5	23255	21.88					
				779.5	23205	21.73	23	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
			24	782	23230	21.86	23	0-1			
				784.5	23255	21.82	23	0-1			
1				779.5	23205	21.26	22				
	16-QAM		0	782	23230	21.16	22				
				784.5	23255	21.08	22				
				779.5	23205	21.19	22				
		12 RB	6	782	23230	21.27	22				
				784.5	23255	21.34	22				
				779.5	23205	20.92	22				
1			13	782	23230	21.29	22				
				784.5	23255	21.15	22				
				779.5	23205	21.21	22				
		25	RB	782	23230	21.15	22	0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1			
				784.5	23255	21.34	22	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 50 of 216

			FDD Bar	nd 13 (Reduce	d Power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
			0	782	23230	17.63	18	0
		1 RB	25	782	23230	17.89	18	0
Q			49	782	23230	17.60	18	0
	QPSK		0	782	23230	16.80	18	0
		25 RB	12	782	23230	16.74	18	Allowed per 3GPP(dB) 0 0 0
			25	782	23230	16.82	18	0
10		50	RB	782	23230	16.86	18	0
			0	782	23230	16.49	18	0 0 0 0 0 0 0 0 0
		1 RB	25	782	23230	16.81	18	0
			49	782	23230	16.53	18	0
	16-QAM		0	782	23230	16.05	18	0
		25 RB	12	782	23230	16.08	18	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
			25	782	23230	16.08	18	0
		50	RB	782	23230	16.11	18	0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 51 of 216

			FDD Bar	nd 13 (Reduce	d Power)				
			, DD Dai	is 10 (Noduce	a / 04401)		Toract		
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				779.5	23205	17.48	18	0	
			0	782	23230	17.48	18	0	
				784.5	23255	17.38	18	0	
				779.5	23205	17.92	18	0	
		1 RB	12	782	23230	17.76	18	0	
				784.5	23255	17.89	18	0	
				779.5	23205	17.41	18	er + Allowed per ance ance ance among ance ance among ance among ance among ance among ance ance ance ance ance ance ance ance	
			24	782	23230	17.45	Max. Tolerance (dBm) 7.48 18 7.48 18 7.48 18 7.76 18 7.76 18 7.76 18 7.76 18 7.76 18 7.76 18 7.76 18 7.76 18 7.76 18 7.76 18 7.76 18 7.76 18 7.77 18 7.78 7.8 7.8 7.8 7.8		
				784.5	23255	17.50			
				779.5	23205	17.02			
	QPSK		0	782	23230	16.88			
				784.5	23255	16.78			
				779.5	23205	16.83			
		12 RB	6	782	23230	16.78			
				784.5	23255	16.97		0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
				779.5	23205	16.75			
			13	782	23230	16.72			
				784.5	23255	16.82			
				779.5	23205	16.80		0 0 0 0 0 0 0 0	
		25	RB						
5			1	784.5	23255	16.81			
			SSRB 0	779.5	23205	16.55			
				782	23230	16.74			
				784.5	23255	16.41			
		4.00	40	779.5	23205	16.55			
		1 RB	12	782	23230	16.73			
				784.5	23255	16.28			
			0.4	779.5	23205	16.68			
			24	782	23230	16.33			
				784.5	23255	16.89			
	16 0 4 14		0	779.5	23205	16.09			
	16-QAM		0	782	23230	16.20			
				784.5	23255	16.02			
		12 RB	6	779.5	23205	16.14			
		IZ KD	0	782	23230	16.14		0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
				784.5	23255	16.28			
			13	779.5	23205	16.14			
			13	782	23230	16.06			
				784.5	23255	16.08			
		25	RB	779.5 782	23205 23230	16.26 16.12			
		25	ועט			1			
				784.5	23255	16.02	18	U	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

prosecuted to the fullest extent of the law.



Page: 52 of 216

			FDD F	Band 17 (Full F	Power)					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				709	23780	22.83	24	0		
			0	710	23790	22.77	24			
				711	23800	22.84	24			
				709	23780	23.01	24	0		
		1 RB	25	710	23790	23.11	24	24 0 24 0 24 0 24 0 24 0 24 0 24 0 24 0		
				711	23800	23.02	24	0		
				709	23780	23.13	24	0		
			49	710	23790	23.16	24	0		
				711	23800	22.97	24	0		
				709	23780	22.03	23	0-1		
	QPSK		0	710	23790	21.93	23	0-1		
				711	23800	21.97	23	0-1		
				709	23780	22.02	23	0-1		
		25 RB	12	710	23790	21.95	23	0-1		
				711	23800	21.97	23	0-1		
				709	23780	22.00	23	0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-		
			25	710	23790	21.96	23			
				711	23800	22.06	23	0-1		
				709	23780	22.06	23	0-1 0-1 0-1 0-1 0-1		
		50	RB	710	23790	21.99	23			
10				711	23800	22.05	23	0-1		
10		0	709	23780	21.56	23	0-1			
			0	710	23790	21.62	23	0-1		
				711	23800	21.83	23	0-1		
				709	23780	21.86	23	0-1		
		1 RB	25	710	23790	22.02	23	0-1		
				711	23800	21.93	23	e 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1		
				709	23780	22.20	23			
			49	710	23790	21.59	23	0-1		
				711	23800	21.92	23			
				709	23780	20.94	22			
	16-QAM		0	710	23790	20.91	22	0-2		
				711	23800	20.92	22			
				709	23780	20.97	22			
		25 RB	12	710	23790	20.94	22			
				711	23800	21.08	22			
				709	23780	21.04	22			
			25	710	23790	20.86	22			
				711	23800	21.06	22	-		
				709	23780	21.15	22			
		50	RB	710	23790	20.88	22			
				711	23800	20.97	22	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 53 of 216

			FDD E	Band 17 (Full F	Power)				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				706.5	23755	22.92	24	0	
			0	710	23790	22.65	24	0	
				713.5	23825	22.54	24	0	
				706.5	23755	23.30	24	0	
		1 RB	12	710	23790	23.49	24	0	
				713.5	23825	22.81	24	0	
				706.5	23755	22.66	24	0	
			24	710	23790	22.97	24	0	
				713.5	23825	22.85	24	0	
				706.5	23755	21.97	23	0-1	
	QPSK		0	710	23790	21.84	23	0-1	
				713.5	23825	21.98	23	0-1	
				706.5	23755	21.91	23	0-1	
		12 RB	6	710	23790	21.96	23	0-1	
				713.5	23825	22.06	23	0-1	
				706.5	23755	22.00	23	0-1	
			13	710	23790	21.96	23	0-1 0-1 0-1 0-1 0-1 0-1	
				713.5	23825	22.03	23	0-1	
				706.5	23755	21.96	23	0-1 0-1 0-1	
		25	RB	710	23790	21.95	23	0-1	
5				713.5	23825	22.01	23	0-1	
				706.5	23755	21.59	23	0-1	
			0	710	23790	21.96	23	0-1	
				713.5	23825	21.38	23	0-1	
				706.5	23755	21.91	23	0-1	
		1 RB	12	710	23790	21.63	23	0-1	
				713.5	23825	22.53	23	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1	
				706.5	23755	21.92	23		
			24	710	23790	21.61	23		
				713.5	23825	22.05	23		
				706.5	23755	20.96	22		
	16-QAM		0	710	23790	20.97	22		
				713.5	23825	21.07	22	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1	
			_	706.5	23755	20.99	22		
		12 RB	6	710	23790	21.10	22		
				713.5	23825	21.19	22		
			4.5	706.5	23755	20.83	22		
			13	710	23790	20.98	22		
				713.5	23825	20.98	22	-	
				706.5	23755	21.22	22		
		25	RB	710	23790	21.12	22		
				713.5	23825	20.87	22	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 54 of 216

			FDD Bar	nd 17 (Reduce	d Power)						
			, DD Dai	ia ir (ircauce	a / 04401)		Toract				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				709	23780	17.54	18	0			
			0	710	23790	17.86	18	0			
				711	23800	17.58	18	0			
				709	23780	17.68	18	0			
		1 RB	25	710	23790	17.93	18	0			
				711	23800	17.90	18	0			
				709	23780	17.96	18	0			
			49	710	23790	17.84	18	0			
				711	23800	17.81	18	0			
				709	23780	16.82	18	0			
	QPSK		0	710	23790	16.70	18	0			
				711	23800	16.68	18	0			
			12	709	23780	16.77	18	0			
		25 RB		710	23790	16.77	18	0			
				711	23800	16.71	18	0			
				709	23780	16.82	18	0			
			25	710	23790	16.74	18	0 0 0 0			
				711	23800	16.91	18	0			
				709	23780	16.83	18	0			
		50	RB	710	23790	16.70	18	0			
10			T	711	23800	16.74	18	0			
			0	709	23780	16.63	18	0			
				710	23790	16.06	18	0			
				711	23800	16.65	18	0			
				709	23780	16.68	18	0			
		1 RB	25	710	23790	16.66	18	0			
				711	23800	16.53	18	0			
				709	23780	16.74	18	0			
			49	710	23790	16.32	18	0			
				711	23800	16.37	18	0			
	40.0414			709	23780	16.07	18	0			
	16-QAM		0	710	23790	16.19	18	0			
				711	23800	16.01	18	0			
		05.55	40	709	23780	16.19	18	0			
		25 RB	12	710	23790	16.01	18	0			
				711	23800	16.17	18	0			
			0.5	709	23780	16.11	18	0			
			25	710	23790	16.06	18	0			
				711	23800	16.14	18	0			
			DD	709	23780	16.22	18	0			
		50	RB	710	23790	16.08	18	0			
				711	23800	16.08	18	0			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_end_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this onlineful and offenders may be

f (886-2) 2298-0488

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 55 of 216

	FDD Band 17 (Reduced Power)							
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				706.5	23755	17.64	18	0
			0	710	23790	17.63	18	0
				713.5	23825	17.14	18	0
				706.5	23755	17.99	18	0
		1 RB	12	710	23790	18.00	18	0
				713.5	23825	17.98	18	0
				706.5	23755	17.21	18	0
			24	710	23790	17.65	18	0
				713.5	23825	17.61	18	0
				706.5	23755	16.70	18	0
	QPSK		0	710	23790	16.68	18	0
				713.5	23825	16.74	18	0
				706.5	23755	16.73	18	0
		12 RB	6	710	23790	16.79	18	0
				713.5	23825	16.87	18	0
				706.5	23755	16.70	18	0
			13	710	23790	16.74	18	
				713.5	23825	16.88	18	0
				706.5	23755	16.66	18	
		25	RB	710	23790	16.72	18	0
5				713.5	23825	16.83	18	0
· ·				706.5	23755	16.69	18	0
			0	710	23790	16.11	18	0
				713.5	23825	16.66	18	0
				706.5	23755	16.60	18	0
		1 RB	12	710	23790	16.75	18	0
				713.5	23825	16.70	18	0
				706.5	23755	16.33	18	0
			24	710	23790	16.81	18	0
				713.5	23825	16.56	18	0
				706.5	23755	16.01	18	
	16-QAM		0	710	23790	16.13	18	0
				713.5	23825	16.04	18	0
				706.5	23755	16.15	18	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		12 RB	6	710	23790	16.15	18	
				713.5	23825	16.12	18	
				706.5	23755	16.23	18	
			13	710	23790	16.04	18	
				713.5	23825	16.08	18	
				706.5	23755	16.09	18	
		25	RB	710	23790	16.02	18	
				713.5	23825	16.06	18	0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 56 of 216

WLAN802.11 a/b/g/n(20M/40M) conducted power table:

	802.11 b	Max. Rated Avg.	Average conducted output power (dBm)		
СН	Frequency	Power + Max. Tolerance (dBm)	Data Rate (Mbps)		
СП	(MHz)	Tolerance (dbin)	1		
1	2412	16	15.66		
6	2437	16	15.69		
11	2462	16	15.95		

	802.11 g	Max. Rated Avg.	Average conducted output power (dBm)		
СН	Frequency	Power + Max. Tolerance (dBm)	Data Rate (Mbps)		
СП	(MHz)	Tolerance (dbiii)	6		
1	2412	16	15.78		
6	2437	16	15.98		
11	2462	16	15.87		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 57 of 216

802	2.11 n(20M)	Max. Rated Avg.	Average conducted output power (dBm)		
СН	Frequency	Power + Max. Tolerance (dBm)	Data Rate (Mbps)		
СП	(MHz)	Tolerance (dbin)	6.5		
1	2412	14	13.82		
6	2437	14	13.97		
11	2462	14	13.81		

802	.11 n(40M)	Max. Rated Avg.	Average conducted output power (dBm)		
СН	Frequency	Power + Max. Tolerance (dBm)	Data Rate (Mbps)		
СП	(MHz)	Tolerance (dbin)	13.5		
3	2422	13	12.97		
6	2437	13	12.99		
9	2452	13	12.83		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 58 of 216

3	302.11 a	M D / IA	Average conducted output		
5.2/5	5.3/5.6/5.8G	Max. Rated Avg. Power + Max.	power (dBm)		
CLI	Frequency	Tolerance (dBm)	Data Rate (Mbps)		
СН	(MHz)	,	6		
36	5180	15.5	15.36		
40	5200	15.5	15.42		
44	5220	15.5	15.41		
48	5240	15.5	15.38		
52	5260	15.5	15.46		
56	5280	15.5	15.38		
60	5300	15.5	15.19		
64	5320	15.5	15.24		
100	5500	15.5	15.48		
120	5600	15.5	15.47		
140	5700	15.5	15.47		
149	5745	15.5	15.39		
157	5785	15.5	15.33		
165	5825	15.5	15.42		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 59 of 216

802	.11 n(20M)		Average conducted output			
5.2/5.3/5.6/5.8G		Max. Rated Avg. Power + Max.	power (dBm)			
СН	Frequency		Data Rate (Mbps)			
CIT	(MHz)		6.5			
36	5180	15.5	15.34			
40	5200	15.5	15.35			
44	5220	15.5	15.34			
48	5240	15.5	15.32			
52	5260	15.5	15.33			
56	5280	15.5	15.29			
60	5300	15.5	15.40			
64	5320	15.5	15.46			
100	5500	15.5	15.32			
120	5600	15.5	15.28			
140	5700	15.5	15.41			
149	5745	15.5	15.43			
157	5785	15.5	15.44			
165	5825	15.5	15.36			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 60 of 216

802	11 n(40M)		Average conducted output			
5.2/5.3/5.6/5.8G		Max. Rated Avg. Power + Max.	power (dBm)			
СН	Frequency	Tolerance (dBm)	Data Rate (Mbps)			
CIT	(MHz)		13.5			
38	5190	13	12.98			
46	5230	13	12.96			
54	5270	13	12.95			
62	5310	13	12.76			
102	5510	13	12.77			
118	5590	13	12.94			
134	5670	13	12.70			
151	5755	13	12.79			
159	5795	13	12.93			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 www.tw.sgs.com



Page: 61 of 216

Bluetooth conducted power table:

Frequency	Data	Max. power(dBm)	Avg.			
(MHz)	Rate	maxii pomoi (aziii)	dBm	mW		
2402	1	8	6.81	4.797		
2441	1	8	7.64	5.808		
2480	1	8	7.36	5.445		
2402	2	8	5.04	3.192		
2441	2	8	5.68	3.698		
2480	2	8	5.05	3.199		
2402	3	8	4.68	2.938		
2441	3	8	5.57	3.606		
2480	3	8	4.97	3.141		

Frequency (MHz)		Avg.				
	Max. power(dBm)	BT4.0				
		dBm	mW			
2402	-1	-0.03	0.993			
2442	-1	-3.21	0.478			
2480	-1	-3.53	0.444			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 62 of 216

1.4 Test Environment

Ambient Temperature: 22±2° C Tissue Simulating Liquid: 22±2° C

1.5 Operation Description

1. WWAN

The EUT is controlled by using Radio Communication Tester (Anritsu MT8820C), and the communication between the EUT and the tester is established by air link. The EUT was tested in the following configurations:

Configuration 1: Back / top / left sides_0mm with power reduction

Configuration 2: Backside_17mm without power reduction.

Configuration 3: Top side_13mm without power reduction.

Configuration 4: Left side_15mm without power reduction.

Configuration 5: Bottom/right sides_0mm without power reduction.

2. WLAN

Use chipset specific software to control the EUT, and makes it transmit in maximum power. The EUT was tested in the following configurations:

Configurations: Back/top/left/right/bottom sides_0mm.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 63 of 216



Back view of tablet (The p-sensor is colocated with WWAN antenna)

Note:

802.11b DSSS SAR Test Requirements:

- 1. SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured maximum output power channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

802.11g/n OFDM SAR Test Exclusion Requirements:

3. SAR is not required for 802.11g/n since the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.tw.sas.com



Page: 64 of 216

Initial Test Configuration:

- 4. An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band.
- SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
- 6. For WLAN antenna, 5.2a/5.3a/5.6a/5.8a is chosen to be the initial test configurations.
- 7. For 5.2a/5.3a/5.8a, since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for subsequent test configuration.
- 8. For 5.6a, since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is > 1.2 W/kg, SAR is required for subsequent test configuration.
- 9. For WLAN antenna, 5.6 n(20) was chosen to be the subsequent test configuration.
- 10.BT and WLAN use the same antenna path and Bluetooth may transmit simultaneously with WWAN.
- 11. LTE modes test according to KDB 941225D05v02r05.
 - a. Per Section 5.2.1, the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation.
 - Using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

> t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Page: 65 of 216

for the RB offset configuration with the highest output power for that channel.

- When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel. b. Per Section 5.2.2, the largest channel bandwidth and measure SAR for QPSK with 50% RB allocation
- The procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.
- c. Per Section 5.2.3, the largest channel bandwidth and measure SAR for QPSK with 100% RB allocation
- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are ≤ 0.8 W/kg.
- Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- d. Per Section 5.2.4, Higher order modulations
- For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 5.2.1, 5.2.2 and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is > ½ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.
- e. Per Section 5.3, other channel bandwidth standalone SAR test requirements
- For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 5.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > ½ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg. The equivalent channel configuration for the RB allocation, RB offset and modulation etc. is determined for the smaller channel bandwidth according to the same number of RB allocated in the largest channel bandwidth.
- 12. According to KDB447498 D01, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is ≤ 0.8 W/kg, when the transmission band is ≤ 100 MHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Page: 66 of 216

13. According to KDB865664 D01, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~10% from the 1-g SAR limit)

14. Based on KDB447498D01,

(1) SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances≤ 50 mm are determined by:

$$\frac{\text{Max. tune up power(mW)}}{\text{Min. test separation distance(mm)}} \times \sqrt{f(\text{GHz})} \leq 3$$

When the minimum test separation distance is < 5mm, 5mm is applied to determine SAR test exclusion.

- (2) For test separation distances > 50 mm, and the frequency at 100 MHz to 1500MHz, the SAR test exclusion threshold is determined according to the following, and as illustrated in Appendix B of KDB447498 D01. [(Threshold at 50mm in step1) + (test separation distance-50mm)x($\frac{f(NHz)}{160}$)](mW),
- (3) For test separation distances > 50 mm, and the frequency at >1500MHz to 6GHz, the SAR test exclusion threshold is determined according to the following, and as illustrated in Appendix B of KDB447498 D01.

[(Threshold at 50mm in step1) + (test separation distance-50mm)x10](mW),

				Top side		Right side			Left side		
Mode	Max. tune-up power(dBm)	Max. tune-up power(mW)	Test separation distance (mm)	Calculation value	Require SAR testing?	Test separation distance (mm)	Calculation value	Require SAR testing?	Test separation distance (mm)	Calculation value	Require SAR testing?
LTE Band 2	23.5	223.872	less than 5	61.717	YES	75	256.172	No	less than 5	61.717	YES
LTE Band 4	24	251.189	less than 5	66.540	YES	75	256.654	No	less than 5	66.540	YES
LTE Band 7	24	251.189	less than 5	80.498	YES	75	258.050	No	less than 5	80.498	YES
LTE Band 12	24	251.189	less than 5	42.489	YES	75	123.466	No	less than 5	42.489	YES
LTE Band 13	24	251.189	less than 5	44.497	YES	75	135.200	No	less than 5	44.497	YES
LTE Band 17	24	251.189	less than 5	42.435	YES	75	123.160	No	less than 5	42.435	YES

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 67 of 216

			Во	ottom side	•	Back side			
Mode	Max. tune-up power(dBm)	Max. tune-up power(mW)	Test separation distance (mm)	>20cm	Require SAR testing?	Test separation distance (mm)	Calculation value	Require SAR testing?	
LTE Band 2	23.5	223.872	210	YES	No	less than 5	61.717	YES	
LTE Band 4	24	251.189	210	YES	No	less than 5	66.540	YES	
LTE Band 7	24	251.189	210	YES	No	less than 5	80.498	YES	
LTE Band 12	24	251.189	210	YES	No	less than 5	42.489	YES	
LTE Band 13	24	251.189	210	YES	No	less than 5	44.497	YES	
LTE Band 17	24	251.189	210	YES	No	less than 5	42.435	YES	

				Top side		Right side			Left side		
Mode	Max. tune-up power(dBm)	Max. tune-up power(mW)	Test separation distance (mm)	>20cm	Require SAR testing?	Test separation distance (mm)	Calculation value	Require SAR testing?	Test separation distance (mm)	Calculation value	Require SAR testing?
WLAN Main 2.45GHz	13.5	22.387	210	YES	No	less than 5	7.025	YES	90	400.703	No
WLAN Main 5GHz	9.5	8.913	210	YES	No	less than 5	4.302	YES	90	400.430	No
ВТ	8	6.310	210	YES	NO	less than 5	1.987	NO	90	400.199	NO
			Bottom side		Back side						
Mode	Max. tune-u power(dBm			ation Calculati nce on value	Require SAR testing?	Test separation distance (mm)	Calculation value	Require SAR testing?			
WLAN Main 2.45GHz	13.5	22.387	less t	7.025	YES	less than 5	7.025	YES			
WLAN Main 5GHz	9.5	8.913	less t	han 4.302	YES	less than 5	4.302	YES			
WLAN Main 2.45GHz	13.5	22.387	less t	han 7.025	YES	less than 5	7.025	YES			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 68 of 216

1.6 Proximity sensor operation description

The P-sensor being used to reduce output power is capacitive in which when the object such as human body, metal or plastic is being approached, the sensing capacitance would be increased with the antenna pad. Once the capacitance is accumulated, and reached over the threshold as set in MCU of the microchip, the interruption signal is pulled low (High state without trigger) and further inform modem module of the transmitter to make power reduction.



1.6.1 Proximity sensor measurement procedure

- The proximity sensor is collocated with WWAN antenna. 1.
- Output power is measured, and monitored by using the communication tester. A RF cables with sufficient length was being attached from the antenna port of the module, and used for the measurement. The appropriate loss attenuated from cable is compensated in the communication tester.



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 69 of 216

1.6.2 Trigger distances for back/top/left side

Test procedure:

- 1. The entire back surface or edge of the tablet is positioned below a flat phantom filled with the required tissue equivalent medium and positioned at least 20 mm further than the distance that triggers power reduction.
- The back surface or edge is moved toward the phantom in 3 mm steps until the sensor triggers.
- 3. The back surface or edge is then moved back (further away) from the phantom until maximum output power is returned to the normal maximum level.
- 4. The back surface or edge is again moved toward the phantom, but in 1 mm steps, until it is at least 5 mm past the triggering point or touching the phantom
- 5. If the tablet is not touching the phantom, it is moved in 3 mm steps until it touches the phantom to confirm that the sensor remains triggered and the maximum power stays reduced.
- The process is then reversed by moving the tablet away from the phantom to determine triggering release, until it is at least 10 mm beyond the point that triggers the return of normal maximum power.
- 7. The measured output power within ± 5 mm of the triggering points, or until the tablet is touching the phantom, for movements to and from the phantom should be tabulated.
- To ensure all production units are compliant, it is generally necessary to reduce the triggering distance determined from the triggering tests by 1 mm, or more if it is necessary, and use the smallest distance for movements to and from the phantom, minus 1 mm, as the sensor triggering distance for determining the SAR measurement distance.
- 9. For back side, the trigger distance of proximity sensor is 18mm.
- 10. For top side, the trigger distance of proximity sensor is 17mm, and we perform the 1.6.3 tilt angle testing in next step.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

> t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com

SGS Taiwan Ltd.



Page: 70 of 216

11. For left side, the trigger distance of proximity sensor is 17mm, and we perform the 1.6.3 tilt angle testing in next step.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 71 of 216

1.6.3 Tilt angle testing

Test procedure:

- The influence of table tilt angles to proximity sensor triggering is determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom, at the smallest sensor triggering test distance determined in sections 1.6.2 by rotating the tablet around the edge next to the phantom in ≤ 10 deg increments until the tablet is +/- 45deg or more from the vertical position at 0 deg.
- If sensor triggering is released and normal maximum output power is restored within the +/- 45deg range, the procedures in step 1) should be repeated by reducing the tablet to phantom separation distance by 1 mm until the proximity sensor no longer releases triggering, and maximum output power remains in the reduced mode.
- 3. The smallest separation distance determined in steps 1) and 2), minus 1 mm, is the sensor triggering distance for tablet tilt coverage. The smallest separation distance determined in sections 1.6.2, 1.6.3 minus 1 mm should be used in the SAR measurements.
- 4. The influence of tablet tilt angles to proximity sensor triggering is determined by positioning top and right sides, please refer to table 1.6.5 and 1.6.6.
- 5. After the tilt angle testing for top side, the sensor is not released during +/- 45deg, so 15-1=14mm, is the sensor triggering distance for tablet tilt coverage. The smallest separation distance minus 1 mm(14-1=13mm) should be used in the SAR measurements.
- 6. After the tilt angle testing for left side, the sensor is not released during +/- 45deg, so 17-1=16mm, is the sensor triggering distance for tablet tilt coverage. The smallest separation distance minus 1 mm(16-1=15mm) should be used in the SAR measurements.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

www.tw.sas.com



Page: 72 of 216

1.6.4 Proximity sensor coverage

The following procedures do not apply and are not required for configurations where the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

Test procedure:

- The back surface or edges of the tablet is positioned at a test separation distance less than or equal to the distance required for back surface or edge triggering, with both the antenna and sensor pad located at least 20 mm laterally outside the edge (boundary) of the phantom, along the direction of maximum antenna and sensor offset.
- The similar sequence of steps applied to determine sensor triggering distance in section 1.6.2 are used to verify back surface and edge sensor coverage by moving the tablet (sensor and antenna) horizontally toward the phantom while maintaining the same vertical separation between the back surface or edge and the phantom.
- 3. After the exact location where triggering of power reduction is determined, with respect to the sensor and antenna, the tablet movement should be continued, in 3 mm increments, until both the sensor and antenna(s) are fully under the phantom and at least 20 mm inside the phantom edge.
- The process is then repeated from the other direction, at the opposite end of maximum antenna and sensor offset, by rotating the tablet 180 degrees.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 73 of 216

1.6.5 Results

The measured output power within ± 5 mm of the triggering points, or until the tablet is touching the phantom, for movements to and from the phantom is tabulated in the following.

Back side

Moving device toward the phantom

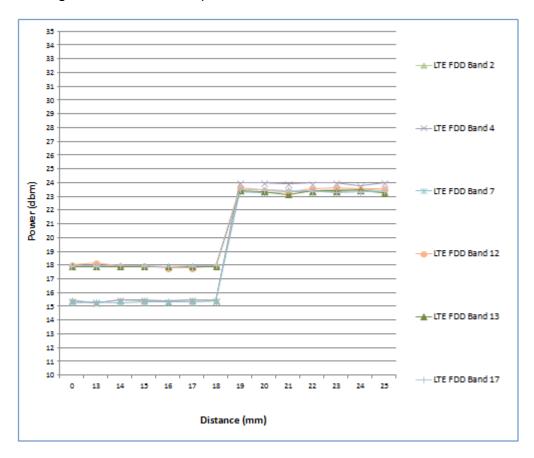

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 74 of 216

Moving device away from the phantom

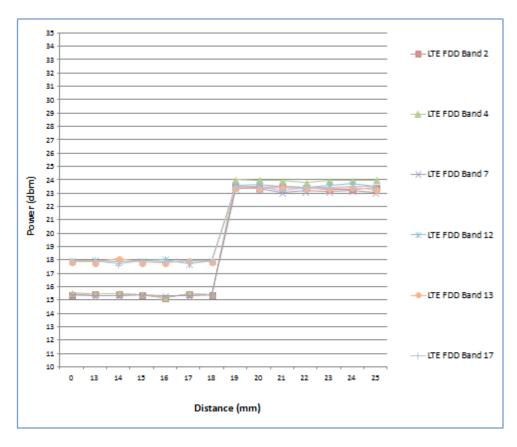

For back side, the worst trigger distance of proximity sensor is 18mm, thus we test back side SAR in 17mm without power reduction and 0mm with power reduction.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 75 of 216

Top side

Moving device toward the phantom

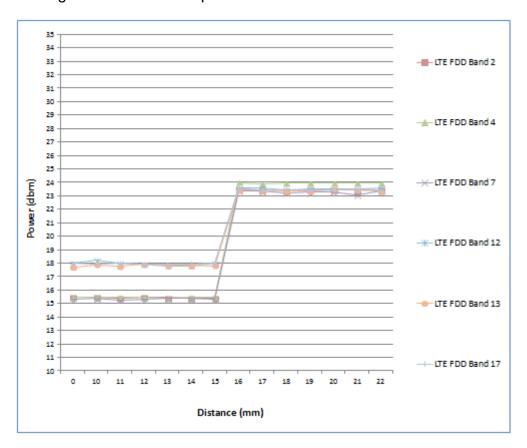

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 76 of 216

Moving device away from the phantom

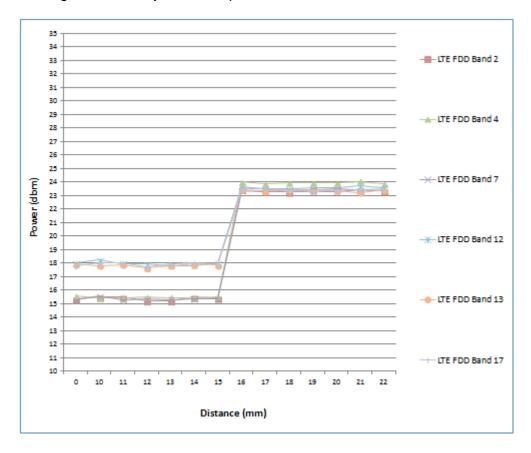

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_end_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

f (886-2) 2298-0488

prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 77 of 216

Left side

Moving device toward the phantom

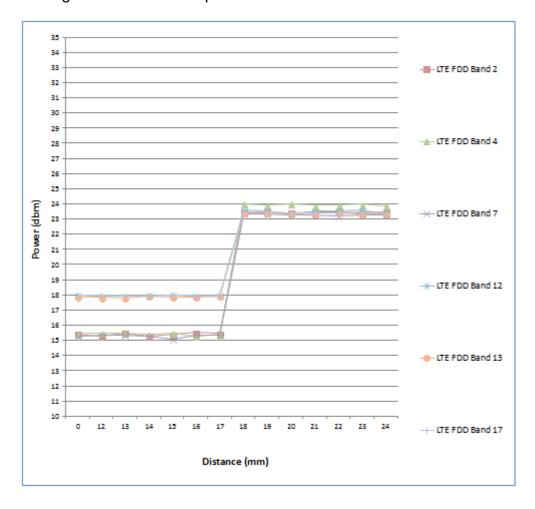

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 78 of 216

Moving device away from the phantom

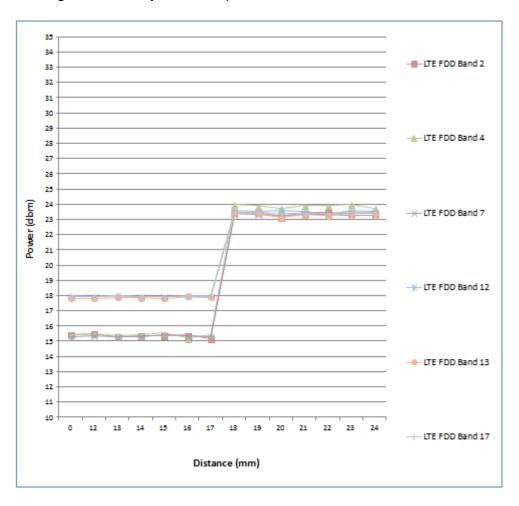


Table 1.6.5 Tilt angle test results for top side

P-sensor	-50	-45	-40	-30	-20	-10	0	10	20	30	40	45	50
ON/OFF	deg												
15mm	ON												

During the tilt angle testing for top side, the sensor is not released in 15mm, so 15-1=14mm, is the sensor triggering distance for tablet tilt coverage. The smallest separation distance minus 1 mm (14-1=13mm) should be used in the SAR measurements for top side.

Table 1.6.6 Tilt angle test results for left side

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 79 of 216

P-sensor	-50	-45	-40	-30	-20	-10	0	10	20	30	40	45	50
ON/OFF	deg												
17mm	ON												

During the tilt angle testing for left side, the sensor is not released in 17mm, so 17-1=16mm, is the sensor triggering distance for tablet tilt coverage. The smallest separation distance minus 1 mm(16-1=15mm) should be used in the SAR measurements for left side.

Note:

- 1. The triggering variations and hysteresis effect has been evaluated separately according to the tissue-equivalent medium required for each frequency band, and sensor triggering does not change with different tissue-equivalent media.
- 2. The default power level for sensor failure and malfunctioning, including all compliance concerns, has been addressed in the client's operation description (1.6.6) for the proximity sensor implementation to be acceptable.
- 3. Conducted power is monitored qualitatively to identify the general triggering characteristics and recorded quantitatively, versus spacing.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

SGS Taiwan Ltd. t (886-2) 2299-3279



Page: 80 of 216

1.6.6 Operation description for P-sensor

Power Reduction Design Specification (for P-sensor)

The mechanism of power reduction is used only for WWAN, not for Wi-Fi and Bluetooth. The reduced power for each technology/band is defined in Table 1-1. With P-sensor mechanism, the LTE default power when P-sensor failure or malfunction are show in Table 1-2 as below.

Table1-1: The power reduction scenario table

Band	Power Reduction
LTE B2/4/7/12/13/17	YES
WLAN	NO
ВТ	NO

Table1-2: The default maximum power when p-sensor failure or malfunction

Technology / Band	Mode	Default Maximum Power (dBm)
LTE B2	All	15.5
LTE B4	All	15.5
LTE B7	All	15.5
LTE B12	All	18
LTE B13	All	18
LTE B17	All	18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.tw.sas.com



Page: 81 of 216

1.7 The SAR Measurement System

A block diagram of the SAR measurement System is given in Fig. a. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation SAR= σ ($|Ei|^2$)/ ρ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY 5 system for performing compliance tests consists of the following items:

- 1. A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- 2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage intissue simulating liquid. The probe is equipped with an optical surface detector system.
- 3. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

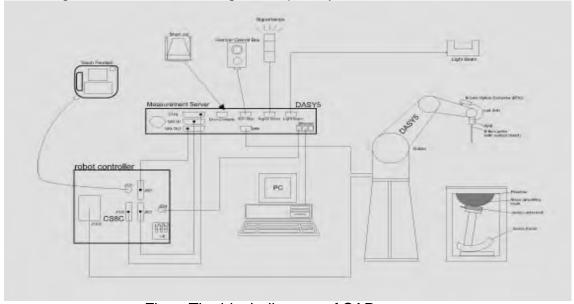


Fig. a The block diagram of SAR system

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

> t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com

SGS Taiwan Ltd.



Page: 82 of 216

- 4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- 5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- 6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- 7. A computer operating Windows 7.
- 8. DASY 5 software.
- 9. Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- 10. The SAM twin phantom enabling testing left-hand and right-hand usage.
- 11. The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes. 12.
- Validation dipole kits allowing to validate the proper functioning of the system.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

SGS Taiwan Ltd. t (886-2) 2299-3279



Page: 83 of 216

1.8 System Components

EX3DV4 E-Field Probe

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)					
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 750/1750/1900/2450/2600/5200/ 5300/5600/5800 MHz Additional CF for other liquids and frequencies upon request					
Frequency	10 MHz to > 6 GHz					
Directivity	± 0.3 dB in HSL (rotation around probe ax ± 0.5 dB in tissue material (rotation normal	,				
Dynamic	10 μW/g to > 100 mW/g	,				
Range	Linearity: ± 0.2 dB (noise: typically < 1 μV	V/g)				
Dimensions	Tip diameter: 2.5 mm					
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 84 of 216

SAM PHANTO	OM V4.0C	
Construction	usage as well as body mounted cover prevents evaporation of the	AM) phantom defined in IEEE tion of left and right hand phone usage at the flat phantom region. An eliquid. Reference markings on setup of all predefined phantom
Shell Thickness	2 ± 0.2 mm	
Filling Volume	Approx. 25 liters	THE THE
Dimensions	Height: 850 mm; Length: 1000 mm; Width: 500 mm	

DEVICE HOLDER

Construction	The device holder (Supporter) for Notebook is made by POM (polyoxymethylene resin), which is non-metal and non-conductive. The height can be adjusted to fit varies kind of notebooks.	
		Device Holder

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 85 of 216

1.9 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. These tests were done at 750/1750/1900/2450/2600/5200/5300/5600/5800 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the ambient temperature of the laboratory was 21.7°C, the relative humidity was 62% and the liquid depth above the ear reference points was ≥ 15 cm ± 5 mm (frequency \leq 3 GHz) or \geq 10 cm \pm 5 mm (frequency > 3 G Hz) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

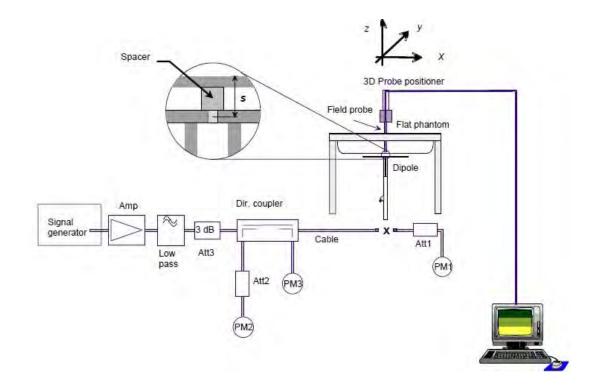


Fig. b The block diagram of system verification

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.tw.sas.com



Page: 86 of 216

Validation Kit	S/N	Frequ (Mł	•	1W Target SAR-1g (mW/g)	Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date
D750V2	1015	750	Body	8.77	2.24	8.96	2.17%	Oct. 24, 2016
D750V2	1015	750	Body	8.77	2.23	8.92	1.71%	Oct. 25, 2016
D1750V2	1008	1750	Body	37.3	8.99	35.96	-3.59%	Oct. 26, 2016
D1900V2	5d027	1900	Body	39.7	9.55	38.2	-3.78%	Oct. 27, 2016
D2450V2	727	2450	Body	49.6	12.9	51.6	4.03%	Oct. 17, 2016
D2600V2	1005	2600	Body	53.9	14.1	56.4	4.64%	Oct. 28, 2016
		5200	Body	71.9	7.52	75.2	4.59%	Oct. 31, 2016
D5GHzV2	1023	5300	Body	75.1	7.82	78.2	4.13%	Oct. 31, 2016
DOGHZVZ	1023	5600	Body	78.3	8.11	81.1	3.58%	Nov. 01, 2016
		5800	Body	75.3	7.44	74.4	-1.20%	Oct. 23, 2016

Table 1. Results of system validation

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 87 of 216

1.10 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this body-simulant fluid were measured by using the Agilent Model 85070E Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Network Analyzer (30 KHz-6000 MHz).

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The depth of the tissue simulant in the flat section of the phantom was \geq 15 cm \pm 5 mm (Frequency \leq 3G) or \geq 10 cm \pm 5 mm (Frequency >3G) during all tests. (Fig. 2)

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, εr	Measured Conductivity, σ (S/m)	% dev εr	% dev σ
		704	55.710	0.960	56.916	0.919	-2.16%	4.25%
		707.5	55.697	0.960	56.894	0.923	-2.15%	3.86%
	Oct. 24, 2016	711	55.683	0.960	56.865	0.928	-2.12%	3.37%
		750	55.531	0.963	56.593	0.966	-1.91%	-0.27%
		782	55.406	0.966	56.336	0.995	-1.68%	-3.02%
		709	55.691	0.960	56.864	0.925	-2.11%	3.66%
	Oct. 25, 2016	710	55.687	0.960	56.856	0.927	-2.10%	3.46%
	Oct. 25, 2010	711	55.683	0.960	56.848	0.929	-2.09%	3.26%
		750	55.531	0.963	56.539	0.969	-1.81%	-0.58%
		1720	53.511	1.469	53.901	1.415	-0.73%	3.71%
	Oct. 26, 2016	1732.5	53.478	1.477	53.793	1.427	-0.59%	3.41%
Body	001. 20, 2010	1745	53.445	1.485	53.679	1.441	-0.44%	2.98%
		1750	53.432	1.488	53.634	1.447	-0.38%	2.78%
		1860	53.300	1.520	52.644	1.559	1.23%	-2.57%
	Oct. 27, 2016	1880	53.300	1.520	52.461	1.578	1.57%	-3.82%
		1900	53.300	1.520	52.253	1.528	1.96%	-0.53%
		2437	52.717	1.938	51.721	1.983	1.89%	-2.34%
	Oct. 17, 2016	2450	52.700	1.950	51.692	1.999	1.91%	-2.51%
		2462	52.685	1.967	51.669	2.012	1.93%	-2.29%
		2510	52.624	2.035	51.572	2.061	2.00%	-1.27%
	Oct 28 2016	2535	52.592	2.071	51.521	2.082	2.04%	-0.55%
	Oct. 28, 2016	2560	52.560	2.106	51.843	2.149	1.36%	-2.04%
		2600	52.509	2.163	51.71	2.24	1.52%	-3.57%

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 88 of 216

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, εr	I laraat	Measured Dielectric Constant, εr	Measured	% dev ɛr	% dev σ
		5200	49.014	5.299	47.506	5.124	3.08%	3.31%
		5220	48.987	5.323	47.387	5.225	3.27%	1.83%
	Oct. 31, 2016	5260	48.933	5.369	47.148	5.426	3.65%	-1.05%
		5280	48.906	5.393	47.029	5.529	3.84%	-2.53%
		5300	48.879	5.416	46.944	5.614	3.96%	-3.65%
Body		5500	48.607	5.650	46.79	5.822	3.74%	-3.05%
	Nov. 1, 2016	5600	48.471	5.766	47.499	5.988	2.01%	-3.84%
		5700	48.336	5.883	47.198	6.087	2.35%	-3.46%
		5785	48.220	5.982	46.941	6.167	2.65%	-3.08%
	Oct. 23, 2016	5800	48.200	6.000	46.894	6.23	2.71%	-3.83%
		5825	48.166	6.029	46.823	6.256	2.79%	-3.76%

Table 2. Dielectric Parameters of Tissue Simulant Fluid

The composition of the tissue simulating liquid:

			Tatal						
Frequency (MHz)	Mode	DGMBE	Water	Salt	Preventol D-7	Cellulose	Sugar	Total amount	
750	Body	_	631.68 g	11.72 g	1.2 g	1	600 g	1.0L(Kg)	
1750	Body	300.67 g	716.56 g	4.0 g	1	1	-	1.0L(Kg)	
1900	Body	300.67 g	716.56 g	4.0 g	ı	1	-	1.0L(Kg)	
2450	Body	301.7ml	698.3ml	1	1	1	-	1.0L(Kg)	
2600	Body	301.7ml	698.3ml	_	_	_	_	1.0L(Kg)	

Body Simulating Liquids for 5 GHz, Manufactured by SPEAG:

Ingredients	Water	Esters, Emulsifiers, Inhibitors	Sodium and Salt
(% by weight)	60-80	20-40	0-1.5

Table 3. Recipes for Tissue Simulating Liquid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 89 of 216

1.11 Evaluation Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- 1. The extraction of the measured data (grid and values) from the Zoom Scan.
- 2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- 3. The generation of a high-resolution mesh within the measured volume
- 4. The interpolation of all measured values from the measurement grid to the high-resolution grid
- 5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- 6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within -2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements.

The measured volume of 30x30x30mm contains about 30g of tissue.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Page: 90 of 216

The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is the moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

1.12 Probe Calibration Procedures

For the calibration of E-field probes in lossy liquids, an electric field with an accurately known field strength must be produced within the measured liquid. For standardization purposes it would be desirable if all measurements which are necessary to assess the correct field strength would be traceable to standardized measurement procedures. In the following two different calibration techniques are summarized:

1.12.1 Transfer Calibration with Temperature Probes

In lossy liquids the specific absorption rate (SAR) is related both to the electric field (E) and the temperature gradient ($\delta T / \delta t$) in the liquid.

$$SAR = \frac{\sigma}{\rho} |E|^2 = c \frac{\delta T}{\delta t}$$

whereby $\boldsymbol{\sigma}$ is the conductivity, $\boldsymbol{\rho}$ the density and \boldsymbol{c} the heat capacity of the liquid.

Hence, the electric field in lossy liquid can be measured indirectly by measuring the temperature gradient in the liquid. Non-disturbing temperature probes (optical probes or thermistor probes with resistive lines) with high spatial resolution (<1-2 mm) and fast reaction time (<1 s) are available and can be easily calibrated with high precision [1]. The setup and the exciting source have no influence on the calibration; only the relative positioning uncertainties of the standard temperature probe and the E-field probe to be calibrated must be considered. However, several problems limit the available accuracy of probe calibrations with temperature probes:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 91 of 216

- The temperature gradient is not directly measurable but must be evaluated from temperature measurements at different time steps. Special precaution is necessary to avoid measurement errors caused by temperature gradients due to energy equalizing effects or convection currents in the liquid. Such effects cannot be completely avoided, as the measured field itself destroys the thermal equilibrium in the liquid. With a careful setup these errors can be kept small.
- The measured volume around the temperature probe is not well defined. It is difficult to calculate the energy transfer from a surrounding gradient temperature field into the probe. These effects must be considered, since temperature probes are calibrated in liquid with homogeneous temperatures. There is no traceable standard for temperature rise measurements.
- The calibration depends on the assessment of the specific density, the heat capacity and the conductivity of the medium. While the specific density and heat capacity can be measured accurately with standardized procedures (\sim 2% for c; much better for ρ), there is no standard for the measurement of the conductivity. Depending on the method and liquid, the error can well exceed ±5%.
- Temperature rise measurements are not very sensitive and therefore are often performed at a higher power level than the E-field measurements. The nonlinearities in the system (e.g., power measurements, different components, etc.) must be considered.

Considering these problems, the possible accuracy of the calibration of E-field probes with temperature gradient measurements in a carefully designed setup is about ±10% (RSS) [2]. Recently, a setup which is a combination of the waveguide techniques and the thermal measurements was presented in [3]. The estimated uncertainty of the setup is ±5% (RSS) when the same liquid is used for the calibration and for actual measurements and ±7-9% (RSS) when not, which is in good agreement with the estimates given in [2].

1.12.2 Calibration with Analytical Fields

In this method a technical setup is used in which the field can be calculated analytically from measurements of other physical magnitudes (e.g., input power). This corresponds to the standard field method for probe calibration in air; however, there is no standard defined for fields in lossy liquids. When using calculated fields in lossy liquids for probe calibration, several points must be considered in the assessment of the uncertainty:

- The setup must enable accurate determination of the incident power.
- The accuracy of the calculated field strength will depend on the assessment of the dielectric parameters of the liquid.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Page: 92 of 216

 Due to the small wavelength in liquids with high permittivity, even small setups might be above the resonant cutoff frequencies. The field distribution in the setup must be carefully checked for conformity with the theoretical field distribution.

References

- N. Kuster, Q. Balzano, and J.C. Lin, Eds., Mobile Communications Safety, Chapman & Hall, London, 1997.
- K. Meier, M. Burkhardt, T. Schmid, and N. Kuster, \Broadband calibration of E-field probes in lossy media", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1954{1962, Oct. 1996.
- K. Jokela, P. Hyysalo, and L. Puranen, \Calibration of specific absorption rate (SAR) probes in waveguide at 900 MHz", IEEE Transactions on Instrumentation and Measurements, vol. 47, no. 2, pp. 432{438, Apr. 1998.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

www.tw.sas.com



Page: 93 of 216

1.13 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1, By the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

- (1) Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube).
- (2) Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.
- (3) Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

The rest of the re



Page: 94 of 216

exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section. (Table 4.)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR (Brain)	1.60 W/Kg	8.00 W/Kg
Spatial Average SAR (Whole Body)	0.08 W/Kg	0.40 W/Kg
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 W/Kg	20.00 W/Kg

Table 4. RF exposure limits

Notes:

- 1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
- 2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 95 of 216

2. Summary of Results

LTE FDD Band II (without power reduction)

	Bandwi								Max. Rated	Measured		Averaged 1g (W		
Mode	dth (MHz)	Modulatior	RB Size	RB start	Position	Distance (mm)	CH	Freq. (MHz)	Avg. Power + Max. Toleranc e (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	17	19100	1900	23.5	23.49	0.23%	0.476	0.477	-
					Top side	13	19100	1900	23.5	23.49	0.23%	0.263	0.264	-
			1 RB	50	Bottom side	0	19100	1900	23.5	23.49	0.23%	0.120	0.120	-
					Right side	0	19100	1900	23.5	23.49	0.23%	0.219	0.220	-
					Left side	15	19100	1900	23.5	23.49	0.23%	0.049	0.049	-
					Back side	17	19100	1900	22.5	22.13	8.89%	0.385	0.419	-
LTE					Top side	13	19100	1900	22.5	22.13	8.89%	0.216	0.235	-
Band 2	20MHz	QPSK	50 RB	50	Bottom side	0	19100	1900	22.5	22.13	8.89%	0.094	0.102	-
Dania 2					Right side	0	19100	1900	22.5	22.13	8.89%	0.162	0.176	-
					Left side	15	19100	1900	22.5	22.13	8.89%	0.039	0.042	-
					Back side	17	18900	1880	22.5	21.97	12.98%	0.348	0.393	-
					Top side	13	18900	1880	22.5	21.97	12.98%	0.180	0.203	-
			100	RB	Bottom side	0	18900	1880	22.5	21.97	12.98%	0.083	0.094	-
					Right side	0	18900	1880	22.5	21.97	12.98%	0.217	0.245	-
					Left side	15	18900	1880	22.5	21.97	12.98%	0.040	0.045	-

LTE FDD Band II (with power reduction)

	Bandwi								Max. Rated	Measured		Averaged 1g (W		
Mode		Modulatior	RB Size	RB start	Position	Distance (mm)	CH	Freq. (MHz)	Avg. Power + Max. Toleranc e (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	0	18900	1880	15.5	15.26	5.68%	1.110	1.173	-
				0	Top side	0	18900	1880	15.5	15.26	5.68%	0.308	0.325	-
			1 RB		Left side	0	18900	1880	15.5	15.26	5.68%	0.049	0.052	-
			TRE		Back side	0	18700	1860	15.5	15.09	9.90%	1.080	1.187	-
				50	Back side	0	19100	1900	15.5	15.26	5.68%	1.160	1.226	122
					Back side*	0	19100	1900	15.5	15.26	5.68%	1.150	1.215	-
				0	Back side	0	18900	1880	15.5	14.42	28.23%	1.010	1.295	-
LTE	20MHz	QPSK			Back side	0	19100	1900	15.5	14.15	36.46%	0.620	0.846	-
Band 2	2011112	QI OIL	50 RB		Back side	0	18700	1860	15.5	14.77	18.30%	1.020	1.207	-
				50	Top side	0	18700	1860	15.5	14.77	18.30%	0.277	0.328	-
					Left side	0	18700	1860	15.5	14.77	18.30%	0.039	0.046	-
					Back side	0	18700	1860	15.5	14.49	26.18%	0.922	1.163	-
					Back side	0	18900	1880	15.5	14.03	40.28%	0.862	1.209	-
			100	RB	Back side	0	19100	1900	15.5	14.04	39.96%	0.639	0.894	-
					Top side	0	18700	1860	15.5	14.49	26.18%	0.254	0.321	-
					Left side	0	18700	1860	15.5	14.49	26.18%	0.034	0.043	-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 96 of 216

LTE FDD Band IV (without power reduction)

	Bandwi								Max. Rated Avg.	Measured		Averaged 1g (W		
Mode		Modulatior	RB Size	RB start	Position	Distance (mm)	CH	Freq. (MHz)	Power + Max. Toleranc e (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	17	20175	1732.5	24	23.99	0.23%	0.491	0.492	-
					Top side	13	20175	1732.5	24	23.99	0.23%	0.308	0.309	-
			1 RB	50	Bottom side	0	20175	1732.5	24	23.99	0.23%	0.029	0.029	-
					Right side	0	20175	1732.5	24	23.99	0.23%	0.436	0.437	-
					Left side	15	20175	1732.5	24	23.99	0.23%	0.043	0.043	-
					Back side	17	20300	1745	23	23.00	0.00%	0.422	0.422	-
LTE					Top side	13	20300	1745	23	23.00	0.00%	0.263	0.263	-
Band 4	20MHz	QPSK	50 RB	0	Bottom side	0	20300	1745	23	23.00	0.00%	0.028	0.028	-
					Right side	0	20300	1745	23	23.00	0.00%	0.371	0.371	-
					Left side	15	20300	1745	23	23.00	0.00%	0.036	0.036	-
					Back side	17	20300	1745	23	22.95	1.16%	0.420	0.425	-
					Top side	13	20300	1745	23	22.95	1.16%	0.265	0.268	-
			100	RB	Bottom side	0	20300	1745	23	22.95	1.16%	0.029	0.029	-
					Right side	0	20300	1745	23	22.95	1.16%	0.374	0.378	-
					Left side	15	20300	1745	23	22.95	1.16%	0.036	0.036	-

LTE FDD Band IV (with power reduction)

	Bandwi								Max. Rated Avg.	Measured		Averaged 1g (W		
Mode		Modulatior	RB Size	RB start	Position	Distance (mm)	CH	Freq. (MHz)	Power + Max. Toleranc e (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	0	20050	1720	15.5	15.45	1.16%	1.240	1.254	123
					Back side*	0	20050	1720	15.5	15.45	1.16%	1.220	1.234	-
		1 RB	50	Back side	0	20175	1732.5	15.5	15.19	7.40%	1.090	1.171	-	
		TIND	30	Back side	0	20300	1745	15.5	15.50	0.00%	1.080	1.080	-	
					Top side	0	20300	1745	15.5	15.50	0.00%	0.329	0.329	-
					Left side	0	20300	1745	15.5	15.50	0.00%	0.023	0.023	-
					Back side	0	20050	1720	15.5	15.19	7.40%	1.050	1.128	-
LTE	20MHz	QPSK		0	Top side	0	20050	1720	15.5	15.19	7.40%	0.246	0.264	-
Band 4	ZUIVINZ	QFSK	50 RB		Left side	0	20050	1720	15.5	15.19	7.40%	0.035	0.038	-
				25	Back side	0	20300	1745	15.5	14.80	17.49%	0.957	1.124	-
				50	Back side	0	20175	1732.5	15.5	14.22	34.28%	0.959	1.288	-
					Back side	0	20050	1720	15.5	14.82	16.95%	1.060	1.240	-
					Back side	0	20175	1732.5	15.5	13.97	42.23%	0.842	1.198	-
		100	RB	Back side	0	20300	1745	15.5	14.42	28.23%	0.929	1.191	-	
					Top side	0	20050	1720	15.5	14.82	16.95%	0.241	0.282	-
					Left side	0	20050	1720	15.5	14.82	16.95%	0.032	0.037	-

⁻ repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 97 of 216

LTE FDD Band VII (without power reduction)

	Bandwi								Max. Rated	Magazzad		Averaged 1g (W		
Mode	dth (MHz)	Modulatior	RB Size	RB start	Position	Distance (mm)	CH	Freq. (MHz)	Avg. Power + Max. Toleranc e (dBm)	Measured Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	17	21350	2560	24	23.36	15.88%	0.384	0.445	-
					Top side	13	21350	2560	24	23.36	15.88%	0.570	0.661	-
			1 RB	50	Bottom side	0	21350	2560	24	23.36	15.88%	0.097	0.112	-
					Right side	0	21350	2560	24	23.36	15.88%	0.260	0.301	-
					Left side	15	21350	2560	24	23.36	15.88%	0.210	0.243	-
					Back side	17	21350	2560	23	22.23	19.40%	0.316	0.377	-
LTE					Top side	13	21350	2560	23	22.23	19.40%	0.454	0.542	-
Band 7	20MHz	QPSK	50 RB	50	Bottom side	0	21350	2560	23	22.23	19.40%	0.073	0.087	-
Dana /					Right side	0	21350	2560	23	22.23	19.40%	0.203	0.242	-
					Left side	15	21350	2560	23	22.23	19.40%	0.158	0.189	-
					Back side	17	21350	2560	23	22.16	21.34%	0.319	0.387	-
					Top side	13	21350	2560	23	22.16	21.34%	0.457	0.555	-
			100	RB	Bottom side	0	21350	2560	23	22.16	21.34%	0.075	0.091	-
					Right side	0	21350	2560	23	22.16	21.34%	0.204	0.248	-
					Left side	15	21350	2560	23	22.16	21.34%	0.169	0.205	-

LTE FDD Band VII (with power reduction)

	Bandwi								Max. Rated	Measured		Averaged 1g (W		
Mode		Modulatior	RB Size	RB start	Position	Distance (mm)	CH	Freq. (MHz)	Avg. Power + Max. Toleranc e (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	0	21100	2535	15.5	15.39	2.57%	0.946	0.970	-
					Back side	0	21350	2560	15.5	15.30	4.71%	0.961	1.006	124
		1 RB	50	Back side*	0	21350	2560	15.5	15.30	4.71%	0.960	1.005	-	
		IND		Top side	0	21100	2535	15.5	15.39	2.57%	0.268	0.275	-	
					Left side	0	21100	2535	15.5	15.39	2.57%	0.349	0.358	-
				99	Back side	0	20850	2510	15.5	15.19	7.40%	0.778	0.836	-
				0	Back side	0	21100	2535	15.5	14.34	30.62%	0.882	1.152	-
LTE	20MHz	QPSK		25	Back side	0	20850	2510	15.5	14.16	36.14%	0.888	1.209	-
Band 7	20111112	QIOIN	50 RB		Back side	0	21350	2560	15.5	14.48	26.47%	0.834	1.055	-
				50	Top side	0	21350	2560	15.5	14.48	26.47%	0.261	0.330	-
					Left side	0	21350	2560	15.5	14.48	26.47%	0.234	0.296	-
					Back side	0	20850	2510	15.5	14.17	35.83%	0.733	0.996	-
					Back side	0	21100	2535	15.5	14.23	33.97%	0.891	1.194	-
			100	RB	Back side	0	21350	2560	15.5	14.32	31.22%	0.723	0.949	-
					Top side	0	21350	2560	15.5	14.32	31.22%	0.230	0.302	-
					Left side	0	21350	2560	15.5	14.32	31.22%	0.205	0.269	-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 98 of 216

LTE FDD Band XII (without power reduction)

	Bandwi								Max. Rated	Measured		Averaged 1g (W		
Mode		Modulatior	RB Size	RB start	Position	Distance (mm)	CH	Freq. (MHz)	Avg. Power + Max. Toleranc e (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	17	23095	707.5	24	23.52	11.69%	0.289	0.323	-
					Top side	13	23095	707.5	24	23.52	11.69%	0.162	0.181	-
			1 RB	25	Bottom side	0	23095	707.5	24	23.52	11.69%	0.022	0.025	-
					Right side	0	23095	707.5	24	23.52	11.69%	0.102	0.114	-
					Left side	15	23095	707.5	24	23.52	11.69%	0.039	0.044	-
					Back side	17	23060	704	23	22.32	16.95%	0.228	0.267	-
LTE					Top side	13	23060	704	23	22.32	16.95%	0.127	0.149	-
Band	10MHz	QPSK	25 RB	25	Bottom side	0	23060	704	23	22.32	16.95%	0.017	0.020	-
12					Right side	0	23060	704	23	22.32	16.95%	0.080	0.094	-
					Left side	15	23060	704	23	22.32	16.95%	0.030	0.035	-
					Back side	17	23060	704	23	22.30	17.49%	0.218	0.256	-
					Top side	13	23060	704	23	22.30	17.49%	0.124	0.146	-
			50 F	RB	Bottom side	0	23060	704	23	22.30	17.49%	0.017	0.020	-
					Right side	0	23060	704	23	22.30	17.49%	0.077	0.090	-
					Left side	15	23060	704	23	22.30	17.49%	0.030	0.035	-

LTE FDD Band XII (with power reduction)

	Bandwi								Max. Rated	Measured		Averaged 1g (W		
Mode		Modulatior	RB Size	RB start	Position	Distance (mm)	CH	Freq. (MHz)	Avg. Power + Max. Toleranc e (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	0	23060	704	18	17.99	0.23%	0.945	0.947	-
			1 RB		Back side	0	23095	707.5	18	17.89	2.57%	0.953	0.977	125
		1 RI	1 RR	25	Back side*	0	23095	707.5	18	17.89	2.57%	0.950	0.974	-
			I KD		Top side	0	23060	704	18	17.99	0.23%	0.258	0.259	-
				Left side	0	23060	704	18	17.99	0.23%	0.049	0.049	-	
				49	Back side	0	23130	711	18	17.96	0.93%	0.883	0.891	-
LTE				0	Back side	0	23095	707.5	18	17.23	19.40%	0.823	0.983	-
Band	10MHz	QPSK		U	Back side	0	23130	711	18	17.23	19.40%	0.811	0.968	-
12	TOWNIZ	QI OIX	25 RB		Back side	0	23060	704	18	17.25	18.85%	0.782	0.929	-
'-				25	Top side	0	23060	704	18	17.25	18.85%	0.204	0.242	-
					Left side	0	23060	704	18	17.25	18.85%	0.042	0.050	-
					Back side	0	23060	704	18	17.18	20.78%	0.776	0.937	-
				Back side	0	23095	707.5	18	17.17	21.06%	0.820	0.993	-	
			50 F	RB	Back side	0	23130	711	18	17.14	21.90%	0.826	1.007	-
					Top side	0	23060	704	18	17.18	20.78%	0.205	0.248	-
					Left side	0	23060	704	18	17.18	20.78%	0.040	0.048	-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 99 of 216

LTE FDD Band XIII (without power reduction)

	Bandwi								Max. Rated Avg.	Measured		Averaged 1g (W		
Mode		Modulatior	RB Size	RB start	Position	Distance (mm)	CH	Freq. (MHz)	Power + Max. Toleranc e (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	17	23230	782	24	23.22	19.67%	0.497	0.595	-
					Top side	13	23230	782	24	23.22	19.67%	0.250	0.299	-
			1 RB	25	Bottom side	0	23230	782	24	23.22	19.67%	0.035	0.042	-
					Right side	0	23230	782	24	23.22	19.67%	0.101	0.121	-
					Left side	15	23230	782	24	23.22	19.67%	0.092	0.110	-
					Back side	17	23230	782	23	22.28	18.03%	0.404	0.477	-
LTE					Top side	13	23230	782	23	22.28	18.03%	0.206	0.243	-
Band	10MHz	QPSK	25 RB	0	Bottom side	0	23230	782	23	22.28	18.03%	0.029	0.034	-
13					Right side	0	23230	782	23	22.28	18.03%	0.085	0.100	-
					Left side	15	23230	782	23	22.28	18.03%	0.071	0.084	-
					Back side	17	23230	782	23	22.18	20.78%	0.396	0.478	-
					Top side	13	23230	782	23	22.18	20.78%	0.200	0.242	-
			50 F	RB	Bottom side	0	23230	782	23	22.18	20.78%	0.029	0.035	-
					Right side	0	23230	782	23	22.18	20.78%	0.079	0.095	-
					Left side	15	23230	782	23	22.18	20.78%	0.072	0.087	-

LTE FDD Band XIII (with power reduction)

	Bandwi								Max. Rated Avg.	Measured		Averaged 1g (W		
Mode		Modulatior	RB Size	RB start	Position	Distance (mm)	CH	Freq. (MHz)	Power + Max. Toleranc e (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
				0	Back side	0	23230	782	18	17.63	8.89%	0.937	1.020	-
					Back side	0	23230	782	18	17.89	2.57%	0.921	0.945	-
			1 RB	25	Top side	0	23230	782	18	17.89	2.57%	0.187	0.192	-
		TIND		Left side	0	23230	782	18	17.89	2.57%	0.155	0.159	-	
				49	Back side	0	23230	782	18	17.60	9.65%	0.956	1.048	126
LTE				43	Back side*	0	23230	782	18	17.60	9.65%	0.951	1.043	-
Band	10MHz	QPSK		0	Back side	0	23230	782	18	16.80	31.83%	0.736	0.970	-
13	10111112	QIOIX		12	Back side	0	23230	782	18	16.74	33.66%	0.725	0.969	-
			25 RB		Back side	0	23230	782	18	16.82	31.22%	0.744	0.976	-
				25	Top side	0	23230	782	18	16.82	31.22%	0.144	0.189	-
					Left side	0	23230	782	18	16.82	31.22%	0.124	0.163	-
				Back side	0	23230	782	18	16.86	30.02%	0.735	0.956	-	
		50 F	RB	Top side	0	23230	782	18	16.86	30.02%	0.147	0.191	-	
					Left side	0	23230	782	18	16.86	30.02%	0.125	0.163	-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 100 of 216

LTE FDD Band XVII (without power reduction)

	Donahui								Max. Rated	Managerad		Averaged 1g (W		
Mode	Bandwi dth (MHz)	Modulatior	RB Size	RB start	Position	Distance (mm)	CH	Freq. (MHz)	Avg. Power + Max. Toleranc e (dBm)	Measured Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	17	23790	710	24	23.16	21.34%	0.297	0.360	-
					Top side	13	23790	710	24	23.16	21.34%	0.150	0.182	-
			1 RB	49	Bottom side	0	23790	710	24	23.16	21.34%	0.020	0.024	-
					Right side	0	23790	710	24	23.16	21.34%	0.107	0.130	-
					Left side	15	23790	710	24	23.16	21.34%	0.270	0.328	-
					Back side	17	23800	711	23	22.06	24.17%	0.238	0.296	-
LTE					Top side	13	23800	711	23	22.06	24.17%	0.123	0.153	-
Band	10MHz	QPSK	25 RB	25	Bottom side	0	23800	711	23	22.06	24.17%	0.016	0.020	-
17					Right side	0	23800	711	23	22.06	24.17%	0.083	0.103	-
					Left side	15	23800	711	23	22.06	24.17%	0.208	0.258	-
					Back side	17	23780	709	23	22.06	24.17%	0.228	0.283	-
					Top side	13	23780	709	23	22.06	24.17%	0.123	0.153	-
			50 F	RB	Bottom side	0	23780	709	23	22.06	24.17%	0.016	0.020	-
					Right side	0	23780	709	23	22.06	24.17%	0.078	0.097	-
					Left side	15	23780	709	23	22.06	24.17%	0.192	0.238	-

LTE FDD Band XVII (with power reduction)

Pandu									Max. Rated	Management		Averaged 1g (W		
Mode dth (MHz)		Modulation	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max. Toleranc e (dBm)	Measured Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
				25	Back side	0	23790	710	18	17.93	1.62%	0.906	0.921	-
				25	Back side	0	23800	711	18	17.90	2.33%	0.909	0.930	-
			1 RB		Back side	0	23780	709	18	17.96	0.93%	0.913	0.921	127
				49	Back side*	0	23780	709	18	17.96	0.93%	0.903	0.911	-
					Top side	0	23780	709	18	17.96	0.93%	0.243	0.245	-
					Left side	0	23780	709	18	17.96	0.93%	0.057	0.058	-
		QPSK		0	Back side	0	23780	709	18	16.82	31.22%	0.719	0.943	-
LTE				12	Back side	0	23790	710	18	16.77	32.74%	0.700	0.929	-
Band	10MHz		25 RB	25	Back side	0	23780	709	18	16.82	31.22%	0.705	0.925	-
17			2011		Back side	0	23800	711	18	16.91	28.53%	0.714	0.918	-
				20	Top side	0	23800	711	18	16.91	28.53%	0.188	0.242	-
					Left side	0	23800	711	18	16.91	28.53%	0.043	0.055	-
					Back side	0	23780	709	18	16.83	30.92%	0.726	0.950	-
					Back side	0	23790	710	18	16.70	34.90%	0.711	0.959	-
			50 F	RB	Back side	0	23800	711	18	16.74	33.66%	0.701	0.937	-
					Top side	0	23780	709	18	16.83	30.92%	0.190	0.249	-
					Top side	0	23780	709	18	16.83	30.92%	0.041	0.054	-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 101 of 216

WLAN Antenna

Mode	WEAN AIREIN	ıu									
Back side 0 6 2437 16 15.69 107.40% 1.010 1.085 128	Mode	Position		СН				Scaling			
Mark Name			(mm)		(IVIHZ)		(dBm)		Measured	Reported	page
WILAN802.11 a 5.46 Description Section		Back side	0	6	2437	16	15.69	107.40%	1.010	1.085	128
WLAN802.11 a 5.3G Top side		Back side*	0	6	2437	16	15.69	107.40%	1.000	1.074	-
Bottom side		Back side	0	11	2462	16	15.95	101.16%	0.987	0.998	-
Left side	WLAN802.11 b	Top side	0	11	2462	16	15.95	101.16%	0.009	0.009	-
Right side		Bottom side	0	11	2462	16	15.95	101.16%	0.390	0.395	-
March Sack side 0		Left side	0	11	2462	16	15.95	101.16%	0.003	0.003	-
Back side		Right side	0	11	2462	16	15.95	101.16%	0.107	0.108	-
Back side		Back side	0	40	5200	15.5	15.42	101.86%	1.060	1.080	129
WLAN802.11 a 5.2G Top side 0 40 5200 15.5 15.42 101.86% 0.006 0.006 - Bottom side 0 40 5200 15.5 15.42 101.86% 0.025 0.025 - Right side 0 40 5200 15.5 15.42 101.86% 0.093 0.095 - Back side 0 52 5260 15.5 15.42 101.86% 0.093 0.095 - Back side 0 52 5260 15.5 15.46 100.93% 1.070 1.080 130 WLAN802.11 a 5.3G Top side 0 52 5260 15.5 15.48 100.93% 0.006 0.006 - Back side 0 52 5260 15.5 15.48 100.93% 0.032 0.379 - Left side 0 52 5260 15.5 15.48 100.93% 0.002 0.002 1.250 1.250 1.250<		Back side*	0	40	5200	15.5	15.42	101.86%	1.040	1.059	-
Bottom side		Back side	0	44	5220	15.5	15.41	102.09%	0.862	0.880	-
Left side	WLAN802.11 a 5.2G	Top side	0	40	5200	15.5	15.42	101.86%	0.006	0.006	-
Right side		Bottom side	0	40	5200	15.5	15.42	101.86%	0.366	0.373	-
Back side		Left side	0	40	5200	15.5	15.42	101.86%	0.025	0.025	-
Back side		Right side	0	40	5200	15.5	15.42	101.86%	0.093	0.095	-
MLAN802.11 a 5.3G Top side 0 56 5280 15.5 15.38 102.80% 0.862 0.886 -		Back side	0	52		15.5	15.46	100.93%	1.070	1.080	130
WLAN802.11 a 5.36 Top side 0 52 5260 15.5 15.46 100.93% 0.006 0.006 - Bottom side 0 52 5260 15.5 15.46 100.93% 0.376 0.379 - Left side 0 52 5260 15.5 15.46 100.93% 0.032 0.032 - Right side 0 52 5260 15.5 15.46 100.93% 0.102 0.103 - Bock side 0 100 5500 15.5 15.48 100.46% 1.270 1.276 131 131 134	WLAN802.11 a 5.3G	Back side*	0	52	5260	15.5	15.46	100.93%	1.050	1.060	-
Bottom side		Back side	0	56	5280	15.5	15.38	102.80%	0.862	0.886	-
Left side		Top side	0	52	5260	15.5	15.46	100.93%	0.006	0.006	-
Left side		Bottom side	0	52	5260	15.5	15.46	100.93%	0.376	0.379	-
Back side		Left side	0	52	5260	15.5	15.46		0.032	0.032	-
WLAN802.11 a 5.6G Back side* 0 100 5500 15.5 15.48 100.46% 1.260 1.266 - WLAN802.11 a 5.6G Back side 0 120 5600 15.5 15.47 100.69% 1.250 1.259 - Top side 0 140 5700 15.5 15.47 100.69% 1.150 1.158 - Top side 0 100 5500 15.5 15.48 100.46% 0.002 0.002 - Bottom side 0 100 5500 15.5 15.48 100.46% 0.026 0.628 - Left side 0 100 5500 15.5 15.48 100.46% 0.026 0.026 - Right side 0 100 5500 15.5 15.48 100.46% 0.034 0.135 - Back side* 0 100 5500 15.5 15.48 100.46% 0.034 0.134 0.135 -		Right side	0	52	5260	15.5	15.46	100.93%	0.102	0.103	-
Back side		Back side	0	100	5500	15.5	15.48	100.46%	1.270	1.276	131
WLAN802.11 a 5.6G Back side 0 140 5700 15.5 15.47 100.69% 1.150 1.158 - Top side 0 100 5500 15.5 15.48 100.46% 0.002 0.002 - Bottom side 0 100 5500 15.5 15.48 100.46% 0.026 0.026 - Right side 0 100 5500 15.5 15.48 100.46% 0.026 0.026 - Right side 0 100 5500 15.5 15.48 100.46% 0.134 0.135 - Back side 0 100 5500 15.5 15.32 104.23% 1.120 1.167 132 Back side* 0 100 5500 15.5 15.32 104.23% 1.000 1.042 - Back side 0 140 5700 15.5 15.41 102.09% 0.006 0.006 - Left side 0		Back side*	0	100	5500	15.5	15.48	100.46%	1.260	1.266	-
Top side		Back side	0	120	5600	15.5	15.47	100.69%	1.250	1.259	-
Top side 0 100 5500 15.5 15.48 100.46% 0.002 0.002 - Bottom side 0 100 5500 15.5 15.48 100.46% 0.625 0.628 - Left side 0 100 5500 15.5 15.48 100.46% 0.026 0.026 - Right side 0 100 5500 15.5 15.48 100.46% 0.134 0.135 - Right side 0 100 5500 15.5 15.48 100.46% 0.134 0.135 - Back side 0 100 5500 15.5 15.32 104.23% 1.120 1.167 132 Back side* 0 100 5500 15.5 15.32 104.23% 1.000 1.042 - Back side 0 140 5700 15.5 15.41 102.09% 1.030 1.052 - Top side 0 140 5700 15.5 15.41 102.09% 0.006 0.006 - Bottom side 0 140 5700 15.5 15.41 102.09% 0.060 0.006 - Right side 0 140 5700 15.5 15.41 102.09% 0.026 0.027 - Right side 0 140 5700 15.5 15.41 102.09% 0.092 0.094 - Back side 0 157 5785 15.5 15.41 102.09% 0.850 0.884 - Back side 0 165 5825 15.5 15.42 101.86% 1.140 1.161 - WLAN802.11 a 5.86 Top side 0 165 5825 15.5 15.42 101.86% 0.007 0.007 - Bottom side 0 165 5825 15.5 15.42 101.86% 0.007 0.007 -	WI ANDOO 44 - 5 00	Back side	0	140	5700	15.5	15.47	100.69%	1.150	1.158	-
Left side 0 100 5500 15.5 15.48 100.46% 0.026 0.026 - Right side 0 100 5500 15.5 15.48 100.46% 0.134 0.135 - Right side 0 100 5500 15.5 15.32 104.23% 1.120 1.167 132 132 132 132 132 132 132 133 132 133 133.99% 1.000 1.042 - Right side 0 140 5700 15.5 15.41 102.09% 1.030 1.052 - Right side 0 140 5700 15.5 15.41 102.09% 0.006 0.006 - Right side 0 140 5700 15.5 15.41 102.09% 0.026 0.027 - Right side 0 140 5700 15.5 15.41 102.09% 0.026 0.027 - Right side 0 140 5700 15.5 15.41 102.09% 0.092 0.094 - Right side 0 140 5700 15.5 15.41 102.09% 0.050 0.884 - Right side 0 165 5825 15.5 15.42 101.86% 1.150 1.171 133 1	WLAN802.11 a 5.6G	Top side	0	100	5500	15.5	15.48	100.46%	0.002	0.002	-
Right side		Bottom side	0	100	5500	15.5	15.48	100.46%	0.625	0.628	-
Back side 0 100 5500 15.5 15.32 104.23% 1.120 1.167 132		Left side	0	100	5500	15.5	15.48	100.46%	0.026	0.026	-
WLAN802.11 n(20M) 5.6G Back side* 0 100 5500 15.5 15.32 104.23% 1.000 1.042 - Top side 0 140 5700 15.5 15.41 102.09% 1.030 1.052 - Top side 0 140 5700 15.5 15.41 102.09% 0.006 0.006 - Left side 0 140 5700 15.5 15.41 102.09% 0.026 0.027 - Right side 0 140 5700 15.5 15.41 102.09% 0.026 0.027 - Right side 0 140 5700 15.5 15.41 102.09% 0.092 0.094 - Back side 0 157 5785 15.5 15.41 102.09% 0.092 0.094 - Back side 0 165 5825 15.5 15.42 101.86% 1.150 1.1		Right side	0	100	5500	15.5	15.48	100.46%	0.134	0.135	-
WLAN802.11 n(20M) 5.6G Back side 0 140 5700 15.5 15.41 102.09% 1.030 1.052 - Bottom side 0 140 5700 15.5 15.41 102.09% 0.006 0.006 - Left side 0 140 5700 15.5 15.41 102.09% 0.026 0.027 - Right side 0 140 5700 15.5 15.41 102.09% 0.026 0.027 - Back side 0 140 5700 15.5 15.41 102.09% 0.026 0.027 - Right side 0 140 5700 15.5 15.41 102.09% 0.092 0.094 - Back side 0 157 5785 15.5 15.33 103.99% 0.850 0.884 - Back side* 0 165 5825 15.5 15.42 101.86% 1.140 1.161 - <tr< td=""><td></td><td>Back side</td><td>0</td><td>100</td><td>5500</td><td>15.5</td><td>15.32</td><td>104.23%</td><td>1.120</td><td>1.167</td><td>132</td></tr<>		Back side	0	100	5500	15.5	15.32	104.23%	1.120	1.167	132
WLAN802.11 n(20M) 5.6G Top side 0 140 5700 15.5 15.41 102.09% 0.006 0.006 - Bottom side 0 140 5700 15.5 15.41 102.09% 0.547 0.558 - Left side 0 140 5700 15.5 15.41 102.09% 0.026 0.027 - Right side 0 140 5700 15.5 15.41 102.09% 0.092 0.094 - Back side 0 157 5785 15.5 15.33 103.99% 0.850 0.884 - Back side 0 165 5825 15.5 15.42 101.86% 1.150 1.171 133 WLAN802.11 a 5.8G Top side 0 165 5825 15.5 15.42 101.86% 1.140 1.161 - WLAN802.11 a 5.8G Top side 0 165 5825 15.5 15.42 101.86% 0.0		Back side*	0	100	5500	15.5	15.32	104.23%	1.000	1.042	-
5.6G Bottom side 0 140 5700 15.5 15.41 102.09% 0.006 0.006 -	/	Back side	0	140	5700	15.5	15.41	102.09%	1.030	1.052	-
Bottom side 0	, ,	Top side	0	140	5700	15.5	15.41	102.09%	0.006	0.006	-
Right side 0 140 5700 15.5 15.41 102.09% 0.092 0.094 - Back side 0 157 5785 15.5 15.33 103.99% 0.850 0.884 - Back side 0 165 5825 15.5 15.42 101.86% 1.150 1.171 133 Back side* 0 165 5825 15.5 15.42 101.86% 1.140 1.161 - WLAN802.11 a 5.8G Top side 0 165 5825 15.5 15.42 101.86% 0.007 0.007 - Bottom side 0 165 5825 15.5 15.42 101.86% 0.542 0.552 - Left side 0 165 5825 15.5 15.42 101.86% 0.021 0.021 -	5.6G	Bottom side	0	140	5700	15.5	15.41	102.09%	0.547	0.558	-
Right side 0 140 5700 15.5 15.41 102.09% 0.092 0.094 - Back side 0 157 5785 15.5 15.33 103.99% 0.850 0.884 - Back side 0 165 5825 15.5 15.42 101.86% 1.150 1.171 133 Back side* 0 165 5825 15.5 15.42 101.86% 1.140 1.161 - WLAN802.11 a 5.8G Top side 0 165 5825 15.5 15.42 101.86% 0.007 0.007 - Bottom side 0 165 5825 15.5 15.42 101.86% 0.542 0.552 - Left side 0 165 5825 15.5 15.42 101.86% 0.021 0.021 -		Left side	0	140	5700	15.5	15.41	102.09%	0.026	0.027	-
Back side 0 165 5825 15.5 15.42 101.86% 1.150 1.171 133 WLAN802.11 a 5.8G Top side 0 165 5825 15.5 15.42 101.86% 1.140 1.161 - Bottom side 0 165 5825 15.5 15.42 101.86% 0.007 0.007 - Left side 0 165 5825 15.5 15.42 101.86% 0.021 0.021 -		Right side	0			15.5					-
WLAN802.11 a 5.8G Back side* 0 165 5825 15.5 15.42 101.86% 1.140 1.161 - Bottom side 0 165 5825 15.5 15.42 101.86% 0.007 0.007 - Left side 0 165 5825 15.5 15.42 101.86% 0.542 0.552 - Left side 0 165 5825 15.5 15.42 101.86% 0.021 0.021 -		Back side	0	157	5785	15.5	15.33	103.99%	0.850	0.884	-
WLAN802.11 a 5.8G Back side* 0 165 5825 15.5 15.42 101.86% 1.140 1.161 - Top side 0 165 5825 15.5 15.42 101.86% 0.007 0.007 - Bottom side 0 165 5825 15.5 15.42 101.86% 0.542 0.552 - Left side 0 165 5825 15.5 15.42 101.86% 0.021 0.021 -		Back side	0	165	5825	15.5	15.42	101.86%	1.150	1.171	133
WLAN802.11 a 5.8G Top side 0 165 5825 15.5 15.42 101.86% 0.007 0.007 - Bottom side 0 165 5825 15.5 15.42 101.86% 0.542 0.552 - Left side 0 165 5825 15.5 15.42 101.86% 0.021 0.021 -		Back side*	0	165	5825		15.42	101.86%		1.161	-
Bottom side 0 165 5825 15.5 15.42 101.86% 0.542 0.552 - Left side 0 165 5825 15.5 15.42 101.86% 0.021 0.021 -	WLAN802.11 a 5.8G	Top side	0	165	5825		15.42	101.86%		0.007	-
Left side 0 165 5825 15.5 15.42 101.86% 0.021 0.021 -		Bottom side	0	165	5825			101.86%			-
		Left side	0	165	5825						-
		Right side	0	165	5825			101.86%	0.090		-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 102 of 216

Note:

Scaling = $\frac{\text{reported SAR}}{\text{measured SAR}} = \frac{P2(\text{mW})}{P1(\text{mW})} = 10^{\left(\frac{P_2 - P_1}{2W}\right)(\text{dPm})}$

Reported SAR = measured SAR * (scaling)

Where P2 is maximum specified power, P1 is measured conducted power

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 103 of 216

3. Simultaneous Transmission Analysis

Simultaneous Transmission Scenarios:

Simultaneous Transmit Configurations	Body
LTE + 2.4/5GHz WLAN	Yes
LTE + BT	Yes

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 104 of 216

3.1 Estimated SAR calculation

According to KDB447498 D01v05 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

Estimated SAR =
$$\frac{\text{Max.tune up power(mW)}}{\text{Min.test separation distance(mm)}} \times \frac{\sqrt{f(GHz)}}{7.5}$$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

Mode	Test position	antenna to user separation distance	Estimated SAR(W/kg)
ВТ	right / bottom / back	< 5mm	0.265
ВТ	top / left	> 50mm	0.4

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 105 of 216

3.1 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by (SAR1 + SAR2)^1.5/Ri, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.tw.sas.com



Page: 106 of 216

LTE FDD Band II + 2.4 GHz WLAN

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	SAR Sum	SPLSR
		Back side	0	1.295	1.085	2.380	Analyzed as below
	1 LTE Band II	Top side	0	0.328	0.009	0.337	ΣSAR<1.6, Not required
1		Bottom side	0	0.12	0.395	0.515	ΣSAR<1.6, Not required
		Right side	0	0.245	0.108	0.353	ΣSAR<1.6, Not required
		Left side	0	0.052	0.003	0.055	ΣSAR<1.6, Not required

WWAN & W	LAN								
Conditions	Position	SAR Value	Coo	ordinates	(cm)	ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
		(W/kg)	х	у	z	(VV/Kg)	Distance (mm)		SAR Test
LTE Band II	Back side	1.295	-3.43	-9.60	-0.32	2.38	206.72	0.018	SPLSR<0.04,
2.4 GHz WLAN	Dack side	1.085	3.02	10.04	-0.35	2.30	200.72		Not required
A		_					_		
					*		WIAN		



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 107 of 216

LTE FDD Band IV + 2.4 GHz WLAN

	LIBB Balla IV I Z.T GIIZ WEAR											
No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	SAR Sum	SPLSR					
		Back side	0	1.288	1.085	2.373	Analyzed as below					
	2 LTE Band IV	Top side	0	0.329	0.009	0.338	ΣSAR<1.6, Not required					
2		Bottom side	0	0.029	0.395	0.424	ΣSAR<1.6, Not required					
		Right side	0	0.437	0.108	0.545	ΣSAR<1.6, Not required					
		Left side	0	0.038	0.003	0.041	ΣSAR<1.6, Not required					

WWAN & WLAN

Conditions	Position	SAR Value	Coc	ordinates ((cm)	ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission	
		(W/kg)	х	у	Z	(vv/kg)	Distance (mm)		SAR Test	
LTE Band IV	· Back side	1.288	-3.57	-9.46	-0.34	2.373 205.83		0.018	SPLSR<0.04,	
2.4 GHz WLAN		1.085	3.02	10.04	-0.35	2.575	200.00	0.010	Not required	

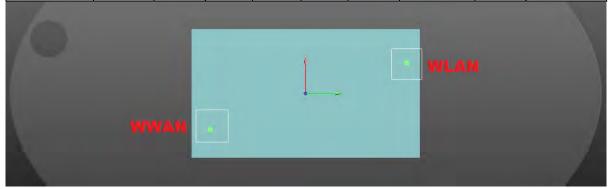

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 108 of 216

LTE FDD Band VII + 2.4 GHz WLAN

	E 1 DD Band VII + 2.4 Onz WEAN											
No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	SAR Sum	SPLSR					
		Back side	0	1.209	1.085	2.294	Analyzed as below					
	3 LTE Band VII	Top side	0	0.330	0.009	0.339	ΣSAR<1.6, Not required					
3		Bottom side	0	0.112	0.395	0.507	ΣSAR<1.6, Not required					
		Right side	0	0.301	0.108	0.409	ΣSAR<1.6, Not required					
		Left side	0	0.358	0.003	0.361	ΣSAR<1.6, Not required					

WWAN & WLAN

Conditions	Position	SAR Value	Cod	ordinates (cm)	ΣSAR	Peak Location Separation	SPLSR	Simultaneous Transmission SAR Test	
		(W/kg)	х	у	Z	(W/kg)	Distance (mm)			
LTE Band VII	Back side	1.209	-2.46	-10.04	-0.28	2.294	208.14	0.017	SPLSR<0.04,	
2.4 GHz WLAN		1.085	3.02	10.04	-0.35	2.234	200.14	0.017	Not required	



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 109 of 216

ITF FDD Band XII + 24 GHz WI AN

	TE I DD Band All T 2.4 GHZ WEAR											
No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	SAR Sum	SPLSR					
		Back side	0	1.007	1.085	2.092	Analyzed as below					
		Top side	0	0.259	0.009	0.268	ΣSAR<1.6, Not required					
4	LTE Band XII	Bottom side	0	0.025	0.395	0.420	ΣSAR<1.6, Not required					
		Right side	0	0.114	0.108	0.222	ΣSAR<1.6, Not required					
		Left side	0	0.050	0.003	0.053	ΣSAR<1.6, Not required					

WWAN & WLAN

	Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
			(W/kg)	х	у	Z	(vv/kg)	Distance (mm)		SAR Test
	LTE Band XII	Back side	1.007	-1.71	-10.20	-0.41	2.092	207.85	0.015	SPLSR<0.04,
	2.4 GHz WLAN	Back side –	1.085	3.02	10.04	-0.35	2.092	207.03	0.013	Not required

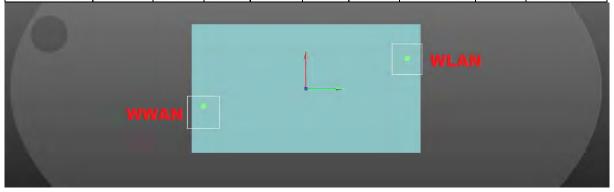

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 110 of 216

LTE FDD Band XIII + 2.4 GHz WLAN

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	SAR Sum	SPLSR				
		Back side	0	1.048	1.085	2.133	Analyzed as below				
		Top side	0	0.192	0.009	0.201	ΣSAR<1.6, Not required				
5	LTE Band XIII	Bottom side	0	0.042	0.395	0.437	ΣSAR<1.6, Not required				
		Right side	0	0.121	0.108	0.229	ΣSAR<1.6, Not required				
		Left side	0	0.163	0.003	0.166	ΣSAR<1.6, Not required				

WWAN & WLAN

Conditions	Position	SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
			х	у	Z	(vv/kg)	Distance (mm)		SAR Test
LTE Band XIII	Back side	1.048	-1.87	-10.20	-0.35	2.133	208.22	0.015	SPLSR<0.04,
2.4 GHz WLAN		1.085	3.02	10.04	-0.35	2.100	200.22	0.013	Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 111 of 216

LTE FDD Band XVII + 2.4 GHz WLAN

	IL I DD Baild AVII I Z. F GIIZ WEAR											
No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	SAR Sum	SPLSR					
		Back side	0	0.959	1.085	2.044	Analyzed as below					
		Top side	0	0.249	0.009	0.258	ΣSAR<1.6, Not required					
6	LTE Band XVII	Bottom side	0	0.024	0.395	0.419	ΣSAR<1.6, Not required					
				Right side	0	0.130	0.108	0.238	ΣSAR<1.6, Not required			
		Left side	0	0.058	0.003	0.061	ΣSAR<1.6, Not required					

WWAN & WLAN

Conditions	Position	SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
			х	у	Z	(vv/kg)	Distance (mm)		SAR Test
LTE Band XVII	Back side	0.959	-1.86	-10.50	-0.42	2.044	206.74	0.014	SPLSR<0.04,
2.4 GHz WLAN		1.085	3.02	10.04	-0.35	2.044	200.74	0.014	Not required

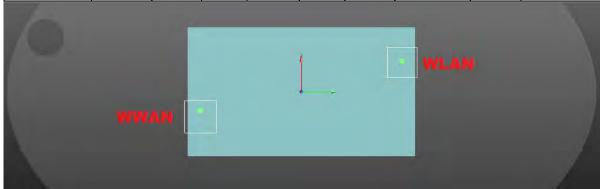

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 112 of 216

LTE FDD Band II + 5 GHz WLAN

	TE 1 DD Band II + 3 Onz WEAR											
No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	SAR Sum	SPLSR					
		Back side	0	1.295	1.276	2.571	Analyzed as below					
		Top side	0	0.328	0.007	0.335	ΣSAR<1.6, Not required					
7	LTE Band II	Bottom side	0	0.12	0.628	0.748	ΣSAR<1.6, Not required					
		Right side	0	0.245	0.135	0.380	ΣSAR<1.6, Not required					
		Left side	0	0.052	0.032	0.084	ΣSAR<1.6, Not required					

WWAN & WLAN

Conditions	Position	Position SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
			х	у	Z	(vv/kg)	Distance (mm)		SAR Test
LTE Band II	· Back side	1.295	-3.43	-9.60	-0.32	2.571	204.63	0.020	SPLSR<0.04,
5 GHz WLAN	Dack Side	1.276	2.96	9.84	-0.36	2.371	204.03	0.020	Not required

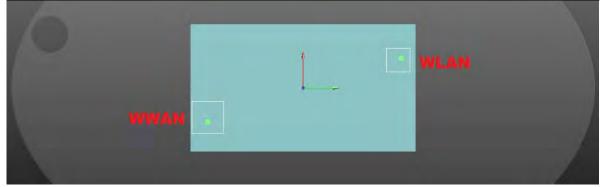

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 113 of 216

LTE FDD Band IV + 5 GHz WLAN

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	SAR Sum	SPLSR
		Back side	0	1.288	1.276	2.564	Analyzed as below
		Top side	0	0.329	0.007	0.336	ΣSAR<1.6, Not required
8	LTE Band IV	Bottom side	0	0.029	0.628	0.657	ΣSAR<1.6, Not required
		Right side	0	0.437	0.135	0.572	ΣSAR<1.6, Not required
		Left side	0	0.038	0.032	0.070	ΣSAR<1.6, Not required

WWAN & WLAN

Conditions	Position	Position SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
			х	у	Z	(vv/kg)	Distance (mm)		SAR Test
LTE Band IV	· Back side	1.288	-3.57	-9.46	0.34	2.564	203.75	0.020	SPLSR<0.04,
5 GHz WLAN	Dack Side	1.276	2.96	9.84	-0.36	2.304	203.73	0.020	Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 114 of 216

LTE FDD Band VII + 5 GHz WLAN

	TE 1 DD Build VII 1 0 OHZ VEAN											
No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	SAR Sum	SPLSR					
		Back side	0	1.209	1.276	2.485	Analyzed as below					
		Top side	0	0.330	0.007	0.337	ΣSAR<1.6, Not required					
9	LTE Band VII	Bottom side	0	0.112	0.628	0.740	ΣSAR<1.6, Not required					
		Right side	0	0.301	0.135	0.436	ΣSAR<1.6, Not required					
		Left side	0	0.358	0.032	0.390	ΣSAR<1.6, Not required					

WWAN & WLAN

Conditions	Position	Position SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
			х	У	Z	(vv/kg)	Distance (mm)		SAR Test
LTE Band VII	· Back side	1.209	-2.46	-10.04	-0.28	2.485	206.06	0.019	SPLSR<0.04,
5 GHz WLAN	Dack Side	1.276	2.96	9.84	-0.36	2.700	200.00	0.019	Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 115 of 216

LTE FDD Band XII + 5 GHz WLAN

	TE I DD Baild XII I O OTIZ WEAR										
No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	SAR Sum	SPLSR				
		Back side	0	1.007	1.276	2.283	Analyzed as below				
		Top side	0	0.259	0.007	0.266	ΣSAR<1.6, Not required				
10	LTE Band XII	Bottom side	0	0.025	0.628	0.653	ΣSAR<1.6, Not required				
		Right side	0	0.114	0.135	0.249	ΣSAR<1.6, Not required				
		Left side	0	0.050	0.032	0.082	ΣSAR<1.6, Not required				

WWAN & WLAN

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (M/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
		(W/kg)	х	у	Z	(W/kg)	Distance (mm)		SAR Test
LTE Band XII	Back side	1.007	-1.71	-10.20	-0.41	2,283	205.77	0.017	SPLSR<0.04,
5 GHz WLAN	Dack Side	1.276	2.96	9.84	-0.36	2.203	200.11	0.017	Not required

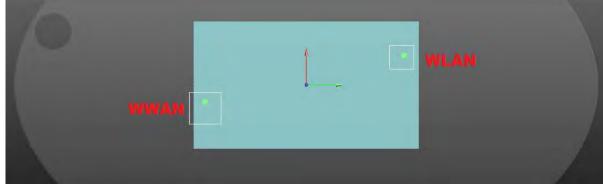

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 116 of 216

LTE FDD Band XIII + 5 GHz WLAN

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	SAR Sum	SPLSR
		Back side	0	1.048	1.276	2.324	Analyzed as below
		Top side	0	0.192	0.007	0.199	ΣSAR<1.6, Not required
11	LTE Band XIII	Bottom side	0	0.042	0.628	0.670	ΣSAR<1.6, Not required
		Right side	0	0.121	0.135	0.256	ΣSAR<1.6, Not required
		Left side	0	0.163	0.032	0.195	ΣSAR<1.6, Not required

WWAN & WLAN

Conditions	Position			Coordinates (cm)			Peak Location Separation	SPLSR	Simultaneous Transmission
		(W/kg)	х	У	Z	(W/kg)	Distance (mm)		SAR Test
LTE Band XIII	Back side	1.048	-1.87	-10.20	-0.35	2.324	206.14	0.017	SPLSR<0.04,
5 GHz WLAN	Back side	1.276	2.96	9.84	-0.36	2.024	200.14	0.017	Not required

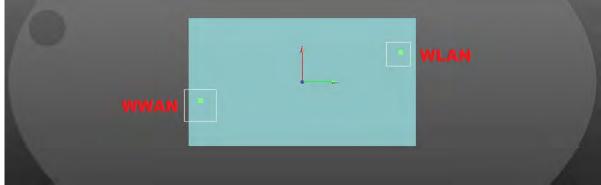

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 117 of 216

LTE FDD Band XVII + 5 GHz WLAN

No.	Conditions	Position	Distance (mm)	Max. WWAN	Max. WLAN	SAR Sum	SPLSR
		Back side	0	0.959	1.276	2.235	Analyzed as below
		Top side	0	0.249	0.007	0.256	ΣSAR<1.6, Not required
12	LTE Band XVII	Bottom side	0	0.024	0.628	0.652	ΣSAR<1.6, Not required
		Right side	0	0.130	0.135	0.265	ΣSAR<1.6, Not required
		Left side	0	0.058	0.032	0.090	ΣSAR<1.6, Not required

WWAN & WLAN

Conditions	Position	SAR Value	Coordinates (cm)			ΣSAR (M/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
		(W/kg)	х	у	Z	(W/kg)	Distance (mm)		SAR Test
LTE Band XVII	Back side	0.959	-1.86	-10.05	-0.42	2.235	204.66	0.016	SPLSR<0.04,
5 GHz WLAN	Dack Side	1.276	2.96	9.84	-0.36	2.200	2.235 204.66		Not required



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 118 of 216

LTE FDD Band II + BT

	TET DE Baila II 1 B1										
No.	Conditions	Position	Distance (mm)	Max. WWAN	ВТ	SAR Sum	SPLSR				
		Back side	0	1.295	0.265	1.560	ΣSAR<1.6, Not required				
		Top side	0	0.328	0.400	0.728	ΣSAR<1.6, Not required				
13	LTE Band II	LTE Band II	Bottom side	0	0.12	0.265	0.385	ΣSAR<1.6, Not required			
		Right side	0	0.245	0.265	0.510	ΣSAR<1.6, Not required				
		Left side	0	0.052	0.400	0.452	ΣSAR<1.6, Not required				

LTE FDD Band IV + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	ВТ	SAR Sum	SPLSR
		Back side	0	1.288	0.265	1.553	ΣSAR<1.6, Not required
		Top side	0	0.329	0.400	0.729	ΣSAR<1.6, Not required
14	LTE Band IV	Bottom side	0	0.029	0.265	0.294	ΣSAR<1.6, Not required
		Right side	0	0.437	0.265	0.702	ΣSAR<1.6, Not required
		Left side	0	0.038	0.400	0.438	ΣSAR<1.6, Not required

LTE FDD Band VII + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	ВТ	SAR Sum	SPLSR
		Back side	0	1.209	0.265	1.474	ΣSAR<1.6, Not required
		Top side	0	0.330	0.400	0.730	ΣSAR<1.6, Not required
15	LTE Band VII	Bottom side	0	0.112	0.265	0.377	ΣSAR<1.6, Not required
		Right side	0	0.301	0.265	0.566	ΣSAR<1.6, Not required
		Left side	0	0.358	0.400	0.758	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 119 of 216

LTE FDD Band XII + BT

	12 1 DD Balla XII 1 D1										
No.	Conditions	Position	Distance (mm)	Max. WWAN	ВТ	SAR Sum	SPLSR				
		Back side	0	1.007	0.265	1.272	ΣSAR<1.6, Not required				
		Top side	0	0.259	0.400	0.659	ΣSAR<1.6, Not required				
16	LTE Band XII	LTE Band XII	Bottom side	0	0.025	0.265	0.290	ΣSAR<1.6, Not required			
		Right side	0	0.114	0.265	0.379	ΣSAR<1.6, Not required				
		Left side	0	0.050	0.400	0.450	ΣSAR<1.6, Not required				

LTE FDD Band XIII + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	ВТ	SAR Sum	SPLSR
		Back side	0	1.048	0.265	1.313	ΣSAR<1.6, Not required
		Top side	0	0.192	0.400	0.592	ΣSAR<1.6, Not required
17	LTE Band XIII	Bottom side	0	0.042	0.265	0.307	ΣSAR<1.6, Not required
		Right side	0	0.121	0.265	0.386	ΣSAR<1.6, Not required
		Left side	0	0.163	0.400	0.563	ΣSAR<1.6, Not required

LTE FDD Band XVII + BT

No.	Conditions	Position	Distance (mm)	Max. WWAN	ВТ	SAR Sum	SPLSR
		Back side	0	0.959	0.265	1.224	ΣSAR<1.6, Not required
		Top side	0	0.249	0.400	0.649	ΣSAR<1.6, Not required
18	LTE Band XVII	Bottom side	0	0.024	0.265	0.289	ΣSAR<1.6, Not required
		Right side	0	0.130	0.265	0.395	ΣSAR<1.6, Not required
		Left side	0	0.058	0.400	0.458	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 120 of 216

4. Instruments List

Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
Schmid & Partner Engineering AG	Dosimetric E-Field Probe	EX3DV4	3923	Sep.02,2016	Sep.01,2017
Schmid & Partner Engineering AG	System Validation Dipole	D750V2	1015	Aug.30,2016	Aug.29,2017
		D1750V2	1008	Aug.31,2016	Aug.30,2017
		D1900V2	5d027	Apr.25,2016	Apr.24,2017
		D2450V2	727	Apr.19,2016	Apr.18,2017
		D2600V2	1005	Jan.21,2016	Jan.20,2017
		D5GHzV2	1023	Jan.26,2016	Jan.25,2017
Schmid & Partner Engineering AG	Data acquisition Electronics	DAE4	1374	Aug.23,2016	Aug.22,2017
Schmid & Partner Engineering AG	Software	DASY 52 V52.8.8	N/A	Calibration not required	Calibration not required
Schmid & Partner Engineering AG	Phantom	SAM	N/A	Calibration not required	Calibration not required
Agilent	Network Analyzer	E5071C	MY46107530	Jan.07,2016	Jan.06,2017
Agilent	Dielectric Probe Kit	85070E	MY44300677	Calibration not required	Calibration not required
Agilent	Dual-directional coupler	772D	MY46151242	Jul.11,2016	Jul.10,2017
		778D	MY48220468	Jul.06,2016	Jul.05,2017
Agilent	RF Signal Generator	N5181A	MY50141235	Dec.24,2013	Dec.23,2016
Agilent	Power Meter	E4417A	MY51410006	Jan.07,2016	Jan.06,2017

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 121 of 216

Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
Agilent	Power Sensor	E9301H	MY51470001	Jan.07,2016	Jan.06,2017
			MY51470002	Jan.07,2016	Jan.06,2017
TECPEL	Digital thermometer	DTM-303A	TP130073	Feb.26,2016	Feb.25,2017
Anritsu	Radio Communication Test	MT8820C	6201061049	Apr.08,2016	Apr.07,2017
R&S	Radio Communication Test	CMW 500	125470	Jul.09,2016	Jul.08,2017

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 122 of 216

5. Measurements

Date: 2016/10/27

LTE Band 2 (20MHz) Body Back side CH 19100 QPSK 1-50 0mm

Communication System: LTE; Frequency: 1900 MHz

Medium parameters used: f = 1900 MHz; $\sigma = 1.528 \text{ S/m}$; $\varepsilon_r = 52.253$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2016/8/23
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (101x51x1): Interpolated grid: dx=15 mm, dy=15

Maximum value of SAR (interpolated) = 1.88 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,

dv=8mm, dz=5mm


dΒ 0

Reference Value = 1.368 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 2.32 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.570 W/kg

Maximum value of SAR (measured) = 1.55 W/kg



0 dB = 1.55 W/kg = 1.91 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 123 of 216

Date: 2016/10/26

LTE Band 4 (20MHz)_Body_Back side_CH 20050_QPSK_1-50_0mm

Communication System: LTE; Frequency: 1720 MHz

Medium parameters used: f = 1720 MHz; $\sigma = 1.415 \text{ S/m}$; $\varepsilon_r = 53.901$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(8.78, 8.78, 8.78); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2016/8/23
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (101x51x1): Interpolated grid: dx=15 mm, dy=15

Maximum value of SAR (interpolated) = 1.84 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dv=8mm, dz=5mm


Reference Value = 1.393 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 1.24 W/kg; SAR(10 g) = 0.601 W/kg

Maximum value of SAR (measured) = 1.71 W/kg





0 dB = 1.71 W/kg = 2.34 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 124 of 216

Date: 2016/10/28

LTE Band 7 (20MHz)_Body_Back side_CH 21350_QPSK_1-50_0mm

Communication System: LTE; Frequency: 2560 MHz

Medium parameters used: f = 2560 MHz; $\sigma = 2.149 \text{ S/m}$; $\varepsilon_r = 51.843$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2016/8/23
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (131x71x1): Interpolated grid: dx=12 mm, dy=12

Maximum value of SAR (interpolated) = 1.64 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dv=5mm. dz=5mm

Reference Value = 1.204 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 2.46 W/kg

SAR(1 g) = 0.961 W/kg; SAR(10 g) = 0.371 W/kg

Maximum value of SAR (measured) = 1.67 W/kg



0 dB = 1.67 W/kg = 2.22 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 125 of 216

Date: 2016/10/24

LTE Band 12 (10MHz)_Body_Back side_CH 23095_QPSK_1-25_0mm

Communication System: LTE; Frequency: 707.5 MHz

Medium parameters used: f = 707.5 MHz; $\sigma = 0.923 \text{ S/m}$; $\varepsilon_r = 56.894$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(10.83, 10.83, 10.83); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2016/8/23
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (101x51x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.35 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 3.263 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.16 W/kg

SAR(1 g) = 0.953 W/kg; SAR(10 g) = 0.491 W/kg

Maximum value of SAR (measured) = 1.39 W/kg



0 dB = 1.39 W/kg = 1.43 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 126 of 216

Date: 2016/10/24

LTE Band 13 (10MHz)_Body_Back side_CH 23230_QPSK_1-49_0mm

Communication System: LTE; Frequency: 782 MHz

Medium parameters used: f = 782 MHz; $\sigma = 0.995 \text{ S/m}$; $\varepsilon_r = 56.336$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(10.83, 10.83, 10.83); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2016/8/23
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (101x51x1): Interpolated grid: dx=15 mm, dy=15

Maximum value of SAR (interpolated) = 1.17 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dv=8mm. dz=5mm

Reference Value = 2.772 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 2.19 W/kg

SAR(1 g) = 0.956 W/kg; SAR(10 g) = 0.486 W/kg

Maximum value of SAR (measured) = 1.47 W/kg



0 dB = 1.47 W/kg = 1.69 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 127 of 216

Date: 2016/10/25

LTE Band 17 (10MHz)_Body_Back side_CH 23780_QPSK_1-49_0mm

Communication System: LTE; Frequency: 709 MHz

Medium parameters used: f = 709 MHz; $\sigma = 0.925$ S/m; $\varepsilon_r = 56.864$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(10.83, 10.83, 10.83); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2016/8/23
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (101x51x1): Interpolated grid: dx=15 mm, dy=15

Maximum value of SAR (interpolated) = 1.28 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dv=8mm, dz=5mm

Reference Value = 3.276 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 2.10 W/kg

SAR(1 g) = 0.913 W/kg; SAR(10 g) = 0.476 W/kg

Maximum value of SAR (measured) = 1.35 W/kg



0 dB = 1.35 W/kg = 1.30 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 128 of 216

Date: 2016/10/17

WLAN 802.11b_Body_Back side_CH 6_0mm

Communication System: WLAN 2.45G; Frequency: 2437 MHz

Medium parameters used: f = 2437 MHz; $\sigma = 1.983$ S/m; $\varepsilon_r = 51.721$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3923; ConvF(8.06, 8.06, 8.06); Calibrated: 2016/9/2;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2016/8/23

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (131x81x1): Interpolated grid: dx=12 mm, dy=12

Maximum value of SAR (interpolated) = 1.73 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dv=5mm. dz=5mm


Reference Value = 0.8190 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 2.96 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.383 W/kg

Maximum value of SAR (measured) = 1.89 W/kg





0 dB = 1.89 W/kg = 2.76 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 129 of 216

Date: 2016/10/31

WLAN 802.11a 5.2G_Body_Back side_CH 40

Communication System: WLAN 5G; Frequency: 5200 MHz

Medium parameters used: f = 5200 MHz; $\sigma = 5.124 \text{ S/m}$; $\varepsilon_r = 47.506$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(4.58, 4.58, 4.58); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2016/8/23
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (151x91x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 1.60 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dv=4mm. dz=2mm

Reference Value = 0.4010 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 6.65 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.256 W/kg

Maximum value of SAR (measured) = 2.47 W/kg



0 dB = 2.47 W/kg = 3.92 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 130 of 216

Date: 2016/10/31

WLAN 802.11a 5.3G_Body_Back side_CH 52

Communication System: WLAN 5G; Frequency: 5260 MHz

Medium parameters used: f = 5260 MHz; $\sigma = 5.426 \text{ S/m}$; $\varepsilon_r = 47.148$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(4.58, 4.58, 4.58); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2016/8/23
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (151x91x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 1.67 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dv=4mm, dz=2mm

Reference Value = 0.5450 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 6.84 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.259 W/kg

Maximum value of SAR (measured) = 2.50 W/kg



0 dB = 2.50 W/kg = 3.99 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 131 of 216

Date: 2016/11/1

WLAN 802.11a 5.6G_Body_Back side_CH 100

Communication System: WLAN 5G; Frequency: 5500 MHz

Medium parameters used: f = 5500 MHz; $\sigma = 5.822 \text{ S/m}$; $\varepsilon_r = 46.79$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3923; ConvF(4, 4, 4); Calibrated: 2016/9/2;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2016/8/23

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (131x71x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 1.82 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dv=4mm. dz=2mm

Reference Value = 0.2050 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 8.33 W/kg

SAR(1 g) = 1.27 W/kg; SAR(10 g) = 0.291 W/kg



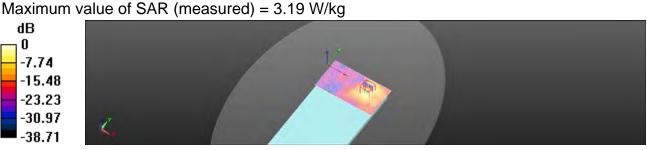

0 dB = 3.19 W/kg = 5.04 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 132 of 216

Date: 2016/11/1

WLAN 802.11n(20M) 5.6G_Body_Back side_CH 100

Communication System: WLAN 5G; Frequency: 5500 MHz

Medium parameters used: f = 5500 MHz; $\sigma = 5.822 \text{ S/m}$; $\varepsilon_r = 46.79$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(4, 4, 4); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2016/8/23
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (131x71x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 2.66 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dv=4mm, dz=2mm

Reference Value = 0.3671 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 7.37 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.266 W/kg

Maximum value of SAR (measured) = 3.09 W/kg





0 dB = 3.09 W/kg = 4.89 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 133 of 216

Date: 2016/10/23

WLAN 802.11a 5.8G_Body_Back side_CH 165

Communication System: WLAN 5G; Frequency: 5825 MHz

Medium parameters used: f = 5825 MHz; $\sigma = 6.256 \text{ S/m}$; $\varepsilon_r = 46.823$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(4.19, 4.19, 4.19); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2016/8/23
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (151x91x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 2.05 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dv=4mm. dz=2mm

Reference Value = 0.2560 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 7.57 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.264 W/kg

Maximum value of SAR (measured) = 2.69 W/kg



0 dB = 2.69 W/kg = 4.29 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 134 of 216

6. SAR System Performance Verification

Date: 2016/10/24

Dipole 750 MHz SN:1015

Communication System: CW; Frequency: 750 MHz

Medium parameters used: f = 750 MHz; $\sigma = 0.966 \text{ S/m}$; $\varepsilon_r = 56.593$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3923; ConvF(10.83, 10.83, 10.83); Calibrated: 2016/9/2;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2016/8/23

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (51x141x1): Interpolated grid: dx=15 mm,

dy=15 mm

Maximum value of SAR (interpolated) = 2.58 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.43 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 3.27 W/kg

SAR(1 g) = 2.24 W/kg; SAR(10 g) = 1.44 W/kgMaximum value of SAR (measured) = 2.75 W/kg





0 dB = 2.75 W/kq = 4.40 dBW/kq

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 135 of 216

Date: 2016/10/25

Dipole 750 MHz_SN:1015

Communication System: CW; Frequency: 750 MHz

Medium parameters used: f = 750 MHz; $\sigma = 0.969 \text{ S/m}$; $\epsilon_r = 56.539$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3923; ConvF(10.83, 10.83, 10.83); Calibrated: 2016/9/2;

Sensor-Surface: 2mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1374; Calibrated: 2016/8/23

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (51x141x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 2.49 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.47 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 3.17 W/kg

SAR(1 g) = 2.23 W/kg; SAR(10 g) = 1.46 W/kg Maximum value of SAR (measured) = 2.75 W/kg



0 dB = 2.65 W/kg = 4.38 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 136 of 216

Date: 2016/10/26

Dipole 1750 MHz_SN:1008

Communication System: CW; Frequency: 1750 MHz

Medium parameters used: f = 1750 MHz; $\sigma = 1.447 \text{ S/m}$; $\varepsilon_r = 53.634$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3923; ConvF(8.78, 8.78, 8.78); Calibrated: 2016/9/2;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2016/8/23

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (41x71x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 12.9 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.62 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 15.2 W/kg

SAR(1 g) = 8.99 W/kg; SAR(10 g) = 4.72 W/kg Maximum value of SAR (measured) = 12.2 W/kg





0 dB = 12.2 W/kg = 10.87 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 137 of 216

Date: 2016/10/27

Dipole 1900 MHz_SN:5d027

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: f = 1900 MHz; $\sigma = 1.528 \text{ S/m}$; $\varepsilon_r = 52.253$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3923; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/9/2;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2016/8/23

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (41x71x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 13.9 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.13 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 17.1 W/kg

SAR(1 g) = 9.55 W/kg; SAR(10 g) = 5.02 W/kg Maximum value of SAR (measured) = 13.2 W/kg





0 dB = 13.2 W/kg = 11.21 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 138 of 216

Date: 2016/10/17

Dipole 2450 MHz_SN:727

Communication System: CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz; $\sigma = 1.999 \text{ S/m}$; $\varepsilon_r = 51.692$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3923; ConvF(8.06, 8.06, 8.06); Calibrated: 2016/9/2;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2016/8/23

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (51x51x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 20.9 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement

grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.43 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 26.8 W/kg

SAR(1 g) = 12.9 W/kg; SAR(10 g) = 5.98 W/kg Maximum value of SAR (measured) = 20.1 W/kg



0 dB = 20.1 W/kg = 13.03 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 139 of 216

Date: 2016/10/28

Dipole 2600 MHz_SN:1005

Communication System: CW; Frequency: 2600 MHz

Medium parameters used: f = 2600 MHz; $\sigma = 2.24 \text{ S/m}$; $\epsilon_r = 51.71$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3923; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/9/2;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2016/8/23

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (61x131x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 24.8 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.8 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 32.6 W/kg

SAR(1 g) = 14.1 W/kg; SAR(10 g) = 6.25 W/kg Maximum value of SAR (measured) = 23.4 W/kg



0 dB = 23.4 W/kg = 13.69 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 140 of 216

Date: 2016/10/31

Dipole 5200 MHz SN:1023

Communication System: CW; Frequency: 5200 MHz

Medium parameters used: f = 5200 MHz; $\sigma = 5.124 \text{ S/m}$; $\varepsilon_r = 47.506$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3923; ConvF(4.58, 4.58, 4.58); Calibrated: 2016/9/2;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2016/8/23

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 15.2 W/kg


Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dv=4mm, dz=2mm

Reference Value = 58.28 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 30.8 W/kg

SAR(1 g) = 7.52 W/kg; SAR(10 g) = 2.02 W/kgMaximum value of SAR (measured) = 15.5 W/kg





0 dB = 15.5 W/kg = 11.91 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 141 of 216

Date: 2016/10/31

Dipole 5300 MHz_SN:1023

Communication System: CW; Frequency: 5300 MHz

Medium parameters used: f = 5300 MHz; $\sigma = 5.614 \text{ S/m}$; $\varepsilon_r = 46.944$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3923; ConvF(4.58, 4.58, 4.58); Calibrated: 2016/9/2;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2016/8/23

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 16.7 W/kg


Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm

Reference Value = 59.06 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 34.1 W/kg

SAR(1 g) = 7.82 W/kg; SAR(10 g) = 2.21 W/kg Maximum value of SAR (measured) = 17.2 W/kg





0 dB = 17.2 W/kg = 12.35 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 142 of 216

Date: 2016/11/1

Dipole 5600 MHz SN:1023

Communication System: CW; Frequency: 5600 MHz

Medium parameters used: f = 5600 MHz; $\sigma = 5.988 \text{ S/m}$; $\varepsilon_r = 47.499$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3923; ConvF(4, 4, 4); Calibrated: 2016/9/2;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2016/8/23

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 18.0 W/kg


Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm

Reference Value = 59.54 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 37.5 W/kg

SAR(1 g) = 8.11 W/kg; SAR(10 g) = 2.29 W/kg Maximum value of SAR (measured) = 18.3 W/kg





0 dB = 18.3 W/kg = 12.63 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 143 of 216

Date: 2016/10/23

Dipole 5800 MHz SN:1023

Communication System: CW; Frequency: 5800 MHz

Medium parameters used: f = 5800 MHz; $\sigma = 6.23 \text{ S/m}$; $\varepsilon_r = 46.849$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3923; ConvF(4.19, 4.19, 4.19); Calibrated: 2016/9/2;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1374; Calibrated: 2016/8/23

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 15.2 W/kg


Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dv=4mm, dz=2mm

Reference Value = 45.41 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 33.5 W/kg

SAR(1 g) = 7.44 W/kg; SAR(10 g) = 2.09 W/kgMaximum value of SAR (measured) = 15.5 W/kg





0 dB = 15.5 W/kg = 11.91 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 144 of 216

7. DAE & Probe Calibration Certificate

Calibration Laboratory of Schweizerischer Kallbrierdienst Schmid & Partner Service suisse d'étalonnage C Engineering AG Servizio svizzero di taratura S Zeughausstrasse 43, 8004 Zurich, Switzerland Swiss Calibration Service Appreditation No.: SCS 0108 Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates SGS-TW (Auden) Certificate No: DAE4-1374_Aug16 CALIBRATION CERTIFICATE DAE4 - SD 000 D04 BM - SN: 1374 Object QA CAL-06.v29 Calibration procedure(a) Calibration procedure for the data acquisition electronics (DAE) August 23, 2016 Calibration date: This calibration certificate documents the traceatality to national standards, which realize the physical units of measurements (SI). The measurements and the uncortainties with confidence probability are given on the following pages and are part of the certificate. All calibrations have been conducted in the classed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%. Calibration Equipment used (M&TE prince) for calibration) Scheduled Calibration Primary Standards Cal Date (Certificate No.) Keithley Multimeter Type 2001 SN: 0810278 09-Sep-15 (No:17153) Sep-16: Scheduled Check Check Date (in house) Secondary Standards SE UWS 063 AA 1001 05-Jan-18 (in house check) Auto DAE Calibration Unit SE UMS 005 AA 1002 05-Jan-16 (in house check) in house check: Jan-17 Calibrator Box V2.1 Emplion Signature Dominique Staffen Technicar Fin Bomboli Deputy Technical Manager IN B/Lune Approved by: Issued: August 23, 2018 This calibration cartificate shall not be reproduced except in full without written approval of the laboratory.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

Certificate No: DAE4-1374_Aug16

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Page 1 at 5



Page: 145 of 216

Calibration Laboratory of Schmid & Partner

Engineering AG Zoughausstrasse 43, 8604 Zurich, Switzerland





Service suisse d'étalonnage C Servizio avizzaro di taretura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary

DAE data acquisition electronics

Connector angle information used in DASY system to align probe sensor X to the robot

coordinate system.

Methods Applied and Interpretation of Parameters

- DC Voltage Measurement: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range
- Connector angle: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - DC Voltage Measurement Linearity: Verification of the Linearity at +10% and +10% of the nominal calibration voltage. Influence of offset voltage is included in this
 - Common mode sensitivity; Influence of a positive or negative common mode voltage on the differential measurement.
 - Channel separation: Influence of a voltage on the neighbor channels not subject to an
 - AD Converter Values with Inputs shorted: Values on the Internal AD converter corresponding to zero input voltage
 - Input Offset Measurement. Output voltage and statistical results over a large number of zero voltage measurements.
 - Input Offset Current: Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - Input resistance: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - Low Battery Alarm Voltage: Typical value for information. Below this voltage, a battery alarm signal is generated.
 - Power consumption: Typical value for information. Supply currents in various operating modes.

Certificate No: DAE4-137A_Aug16

Page 2 of 6

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 146 of 216

DC Voltage Measurement

A/D - Converter Resolution nominal High Range: 1LSB =

6.1uV. full range = 100...+300 mV how Range: ILSB= 61nV full range = -1.....+3mV DASY measurement parameters: Auto Zero Time: 3 sec. Measuring time: 3 sec.

Calibration Factors	X	Υ	Z
High Range	403.637 ± 0.02% (k=2)	403.886 ± 0.02% (k=2)	404.160 ± 0.02% (k=2)
Low Range	3.98275 ± 1.50% (k=2).	3.96719 ± 1.50% (1=2)	3,09036 ± 1.50% (⊫≥)

Connector Angle

Connector Angle to be used in DASY system	42.5°±1°

Contricate No: DAE4-1374_Aug15

Page 3 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 147 of 216

Appendix (Additional assessments outside the scope of SCS0108)

High Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	200039.11	0.18	0.00
Channel X + Input	20005.23	0.57	0.00
Channel X - Input	-20004.46	1.52	-0.01
Channel Y + Input	200041.10	3.98	0.00
Channel Y + Input	20002.96	-1,76	-0.01
Channel V - Input	-20007,46	-1.33	0.01
Channel Z + Input	200039.71	2.56	0.00
Channel Z + Input	20002.57	-2.04	-0.01
Channel Z - Input	-20008.39	-2.20	0.01

Low Range	Reading (µV)	Difference (µV)	Error (%)
Channel X. + Input	2001.14	0.37	0.02
Channel X + Input	200.90	0.07	0.03
Channel X - Input	-198.75	0.41	-0.20
Channel Y + Input	2000,82	0.06	0.00
Channel Y + Input	200.17	-0.51	-0.25
Channel Y - Input	-199,47	-0.29	0.15
Channel Z + Input	2000.50	-0.29	-0.01
Channel 2 + Input	199.36	-1,24	-0.62
Channel Z - Input	-200.79	-1.45	0.73

2. Common mode sensitivity

Auto Zoro Timor 3 sec: Messuring time: 3 sec.

	Common mode Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (μV)
Channel X	200	6,08	3.93
	-200	-2.69	-4.73
Channel Y	200	7,56	7.12
	200	-8.69	8.88
Channel Z	200	5.83	80°,c
	- 200	-8.94	-B 16

3. Channel separation

	Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)
Channel X	200		-2.29	-1.91
Channel Y	200	4.85		-1.13
Channel Z	200	10.99	2.02	-

Certificate No: DAE4-1374_Aug16

Page 4 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 148 of 216

4. AD-Converter Values with inputs shorted

	High Range (LSB)	Low Range (LSB)
Channel X	15938	14709
Channel Y	18155	14646
Channel Z	16095	15566

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring lime: 3 sec

	Average (μV)	min. Offset (μV)	max. Offset (μV)	Std. Daviation (µV)
Channel X	1.17	0:20	1.90	0.33
Channel Y	0.61	-0.17	1.24	0.30
Channel Z	-1,30	-2.42	-0.33	0.37

6. Input Offset Current

Nominal input circuitry offset current on all charmels: <25tA

7. Input Resistance (Typical values for information)

	Zerolng (kOhm)	Measuring (MOhm)
Channel X	200	500
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)	
Supply (+ Voc)	+7.9	
Supply (- Vcc)	-7.6	

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vec)	+0,81	+6	+14
Supply (- Vcc)	-0.01	-6	-0

Certificate No: DAE4-1374_Aug16

Page 5 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 149 of 216

Calibration Laboratory of Schmid & Partner Engineering AG aughausstrasse 43, 8004 Zurich, Switzerland

SGS-TW (Auden)





Bervice suisse d'étalormage Servizio evizzero di taratura Swiss Calibration Service

Accredited by the Swas Accreditation Service (SAS) The Swiss Accreditation Service is one of the signaturies to the EA

Multiliateral Agreement for the recognition of calibration certificates

сильсан No: EX3-3923_Sep16

CALIBRATION CERTIFICATE EX3DV4 - SN:3923 Chiech QA CAL 01.48, QA CAL-14.44, QA CAL-25.45, QA CAL-25.46 Cathydien precedure(s) Calibration procedure for dosimetric E-field probes September 2, 2016 Calburgos data: This calds above cardificate occurrents the tracestrifty to restored standards, which ramibe the physical units of measurements (SI) The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate All caltergrams have been conducted in the closed into retory facility invironment immonstrate (22 ± 5)°C and humidity < 70%. Calibration Equipment, sed (M61E ontical for cellification)

Primary Standards	6	Cal Date (Certificate No.)	Scheduled Calibration
Power pain NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-ZS1	5N: 183044	06-Apt-18 (No. 217-02288)	Apr-17
Fower sensor NRP-Z91	BN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: S5277 (20x)	05-Apr-16 (No. 217-02293)	Apr-17
Reference Probe ES30V2	SN: 3013	31-Dec-15 (No ES3-3813 Dec15)	Dec 16.
DAE4	SN: 660	23-Bac-15 (No DAE4-890 Deci-5)	Ded-To
Sepondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E44198	SN: I3B41293874	DD-Apr-18 (in noise diex. Jul-16)	in house steck asy-18
Power sensor E4412A	SN MY41408087	06-Apr-16 (in house check Jun-16)	in house check: Jun 18
Power sersor E4412A	SM 000110210	BS-Apr-16 (in house check Jun-18)	in house check, airy-18
RP generals: HP 8848C	SN: US3642U01700	04-Aug-99 (in house-check Jun-16)	In house check: Jun-18
Network Analyzer HP 8753E	SM:11837390886	18-Oct-01 (in house check Oct-15)	in house chack: Cc:-18

Laboratory Learnagian **Uchael Weiss** Californiad by Testinesi Mansoe Kinga Roksyk Approved by Issued September 2, 2018 This existing outlifease shall not be reproduced except a full without written approver of the associately

Certificate No: EX3-3923_Sep16

Page 1 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 150 of 216

Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstmass 43, 8804 Zurüch, Switzerland





Service sulms of internage C Servizio svizzaro di haratura Switz Calibration Buryleu

Accreditation No | SCS 010E

Accrecited by the Swee Accrecitation Security (BAS)

The Sween Accorditation Service is one of the algorithms to the EA Muzitaseral Agreement for the recognision of calibration certification

Glossary:

NORMx,y,z CUNF DCP

A.B.C.D

hissue simulating liquid sensitivity in thee space aursawity in TSL / NORMs, y, z diade compression point

crest factor (1/duty_cycle) of the RF signal. modulation dependent linearization parameters

Polarization a a rotation around probe axis

If relation around an oxes that is in the plane normal to probe exis (at measurement center), Polarization II

(a) n = 0 is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the probal coordinate system

Catibration is Performed According to the Following Standards:

a) IEEE Std 1529-2013, *IEEE Reportmended Practice for Colormining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices. Measurement Techniques, June 2013

(b) IEC 62209-1, Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close praximity to the ear (frequency range of 300 MHz to 3 GHz)*, February 2005

(c) IEC 62209-2, Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices.

used in close proximity to the human body (flequincy range of 90 MHz to 6 GHz)*. March 2010 d) KDB 965664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

NORMs,y,z. Assessed for E-field potanization b=0 (f ≤ 900 MHz in TEM-cell; f ≈ 1800 MHz; R22 waveguide), NORMs,y,z are only intermediate values, i.e., the uncertainties of NORMs,y,z does not affect the \mathbb{R}^2 -field uncertainty inside TSL (see below Com/)

NORM(f)x,y,z = NORMx,y,z * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncortainty of the frequency response is included in the stated uncertainty of CovivP.

DCPx.y.c. DCP are (ulmerical imperization parameters assessed based on the data of power switch QW signal (no uncertainty (equired), DCP does not depend on frequency not media.

PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signer characteristics

Axy, z: Bx, y, z: Cx, y, z: Dx, y, z: VRx, y, z: A, B, C, U are numerical linearization paremeters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on requency no media. VR is the maximum calibration range expressed in RMS voltage across the Godd.

ConyF and Boundary Effect Parameters: Assessed in fall phantom using 6-field (or Temperature Transfer Standard for I s 800 MHz; and inside wavegade using analytical field distributions based on power measurements for 1 > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMs, v.z.* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASV version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 Mitz

Spherical (sotropy (SD) downton from isotropy); in a field of low gradients realized using a flat phareon. soposed by a paich antenna.

Sensor Officer. The sensor officet corresponds to the officer of virtual measurement penter from the probe tip. (on probe exist. No tolerance required.

Connector Angle: The angle is assessed using the information pained by determining the MORAM (no uncertainty required)

Certificate Not EX3-3923 Sept6

Page 2 pl 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

www.tw.sas.com



Page: 151 of 216

EX3DV4 - SN 3923

September 2, 2016

Probe EX3DV4

SN:3923

Manufactured: Repaired: Calibrated: March 8, 2013 August 30, 2016 September 2, 2016

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

Cammissia No: EX3-3923_Sep16

Price Idi II

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 152 of 216

EXXXV4_SN:3923

Semiamber 2, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3923

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (µV/(V/m) ²) ^A	0.55	0.46	0.45	± 10.1 %
DCP (mV)*	101.5	102.8	106.7	

Modulation Calibration Parameters

UID	Communication System Name		A dB	dBõV	C	D D	VR mV	Unc (k=2)
0	CW	X	D.0	0.0	1.0	0.00	150.8	±3.0 %
		Y	0.0	0.0	1.0		149.7	1000
		Z	0.0	0.0	1.0		151.5	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No. EX3-3923, Sep16

Page 4 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

A The encententies of Norm X,Y,Z do not affect the E² had uncontainty reads T&L code Pages 5 and (i) a National or presented tercontainty not required.

**The encentent is determined using the max, deviation from their response applying entengals retrictions, and a expressed for the square of the field value.



Page: 153 of 216

EX3DV4-SN/3923

September 2, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3923

Calibration Parameter Determined in Head Tissue Simulating Media

r(MHz) ^C	Relative Permittivity	Conductivity (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^{it}	Depth " (mm)	Unic (k=2)
750	41,9	0.99	11.01	11.01	11.01	0.53	0.80	±120%
835	41.5	0.90	10.66	10.66	10.65	0.47	0.80	±12.0%
900	41.5	0.97	10.40	10.40	10.40	0.38	0.93	±12.0 %
1750	40.1	1/37	9,27	9.27	9.27	0.29	0:80	± 12.0 %
1900	40.0	1,40	8.90	8.90	8.90	0.30	0.80	±12.0 %
2000	40.0	1,40	8.92	8.92	8.92	0.34	0.80	±12.0 %
2450	39.2	1,80	7.95	7.95	7.95	0.33	0.85	± 12.0 %
2600	39.0	1,96	7.77	7,77	7.77	0.33	0.80	±12.0 %
0250	35.9	4.71	5.36	5,36	5.36	0.30	1.80	±13.1 %
5800	35.5	5,07	4.94	4.94	4.94	0:40	1.80	±13.1 %
5750	35.4	5.22	4.96	4.96	4.96	0.40	1.80	±13.1 W

Frequency variety above 30s WHz of ± 100 MHz only appear for DASY v4.4 and higher (see Page 2), dise it is methicled to ± 50 MHz. The stress will be the SS of the Confirm containty of calls after frequency and the uncertainty for the indicated frequency band. Frequency variety below 300 MHz to ± 90.25, 40, 50 and 70 MHz to Confirm consensus at 30, 64, 128, 154 and 220 MHz respectively. Above 5 GHz industry validity can be extended to ± 100 MHz.

At Frequences below 3 GHz, the validity of tissue parameters (sand or) can be interested to ± 100 MHz.

At Frequences below 3 GHz, the validity of tissue parameters (sand or) can be interested at 100 MHz to the comparison formula is applied to measured SAR values. At frequencies choice 3 GHz, the validity of finance parameters (can or) can be investigated to ± 5%. The uncertainty is the RSS of the Confirm the Confirm of th

Certificate No: EX3-3923_Septill

Plage 5 of TT

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

f (886-2) 2298-0488

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Page: 154 of 216

EX3DV4-SN:3923

September 2, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3923

Calibration Parameter Determined in Body Tissue Simulating Media

r (Miniz) c	Relative Permittivity	Gondastivity (S/m)	ConvF X	ConvF Y	ConvFZ	Alpha ⁶	Depth (mm)	Unc (k=2)
750	58.5	0.96	10.83	10.83	10.83	0.32	0.98	± 12.0 %
835	55.2	0.97	10.67	10.67	10.87	0,37	0.96	± 12.0 %
900	55.0	1,05	10.52	10.52	10.52	0.44	0.80	±12.0 %
1750	53.4	1,49	8.78	8.78	8.78	0.39	0.81	± 12.0 %
1900	53.3	1,52	8.47	8.47	8.47	0.37	0.80	± 12.0 %
2000	53.3	1.52	8.88	8.68	8.68	0.38	0.80	± 12.0 %
2450	52.7	1.95	B.06	8.08	8,08	0.30	0.80	± 12.0 %
2600	52,5	2.16	7.84	7.84	7.84	0.27	0.80	± 12.0 %
5250	48.9	5.36	4.58	4.58	4.58	0.50	1,90	1 13.1 %
5600	48.5	5.77	4.00	4.00	4:00	0,65	1,90	± 13.1 V
5760	46.8	5.94	4.19	4.19	4.19	0.55	1,90	± 13.1 9

Frequency validity above 300 MHz of ±100 MHz only applies for DASY vA.4 and higher (see Page 2), since it is reminded to ±50 MHz. The uncertainty is the RSS of the Carlier contract of the property and the uncertainty for the indicated frequency hand. Frequency validity below 30 MHz is ±10, \$5, 40, 00 and 10 MHz for ConvF assessments at 30, 64, 124, 190 and 200 MHz compensation for the frequency validity can be retired to ±110 MHz.

At frequencies below 3 CHz, the entidity of tissue parameters (a and of can be resemble to ±10% if iquid compensation formula is applied to measured 3AR values. At frequencies above 3 GHz, the indicty of tissue parameters (a and of the resemble to the Denivir uncertainty for indicated larger tissue parameters.

AptituDepth are determined carling calibration. SPAG scarcetts that the immaking deviation due to the bouncary effect after compensation is always less than ±1% for inequancies below 3 GHz and below ±2% for inequancies between 3-5 GHz at any distance rarger than hair the probe representative.

Certificate No. EX3-3923, Septis

Fags 8 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 155 of 216

EX3DV4- BN:3923

September 2, 2016

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

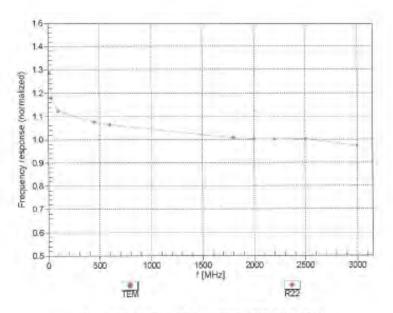

Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

Certificate No: EX3-3923_Sep16

Page 7 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.





Page: 156 of 216

EX3DV4-SN:3923

September 2, 2016

Receiving Pattern (6), 9 = 0°

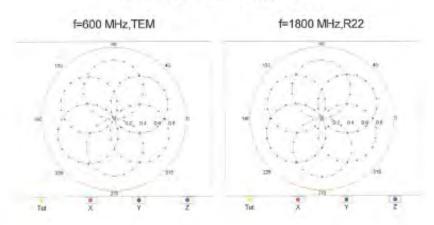

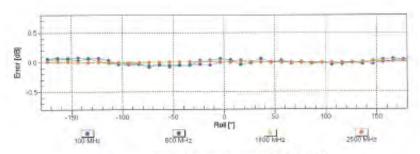

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

Certificate No: EX3-3923_Sep16

Page 8 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sgs.com





Page: 157 of 216

EX3DV4-SN:3923

September 2, 2016

Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

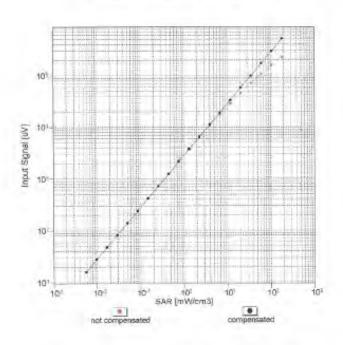



Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Certificate No: EX3-3923_Sep16

Page 9 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 158 of 216




Conversion Factor Assessment

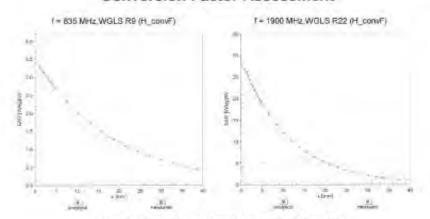

Deviation from Isotropy in Liquid

Error (6, 9), f = 900 MHz



Certificate Nor EX3-3923_Sep15

Page 10 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 159 of 216

EX3DV4- SN 3923

September 2, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3923

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (*),	26.4
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	pisabled
Probe Overall Length	337 mm
Probe Body Diameter	10 min
Tip Length	9.mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point.	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Dertificate No: EX3-3923, Booffs

Page 51 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 160 of 216

8. Uncertainty Budget

Measurement Uncertainty evaluation template for DUT SAR test (3-6G)

А	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probabilit y	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	8
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	80
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	80
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	00
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	80
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	œ
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	80
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	8
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	80
Probe Positioning with respect to phantom	2.90%	R	√3	1.732	1	1	1.67%	1.67%	80
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	80
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	8
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	3.96%	N	1	1	0.64	0.43	2.53%	1.70%	М
Liquid Conductivity (mea.)	3.84%	N	1	1	0.6	0.49	2.30%	1.88%	М
Combined standard uncertainty		RSS					12.21%	11.98%	
Expant uncertainty (95% confidence							24.41%	23.96%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. t (886-2) 2299-3279

www.tw.sgs.com



Page: 161 of 216

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

		ı	ı	1	1		I	1	1
A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probabilit y	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.00%	N	1	1	1	1	6.00%	6.00%	∞
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	∞
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	∞
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom	2.90%	R	√3	1.732	1	1	1.67%	1.67%	∞
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	2.16%	N	1	1	0.64	0.43	1.38%	0.93%	М
Liquid Conductivity (mea.)	4.25%	N	1	1	0.6	0.49	2.55%	2.08%	М
Combined standard uncertainty		RSS					11.78%	11.63%	
Expant uncertainty (95% confidence							23.56%	23.27%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 162 of 216

9. Phantom Description

Schmid & Panner Engineering AG Zeughaussisse 43, BC64 Zurch, Switzerlan Phone +41 1 245 9700, Fax +41 1 245 9779 http://www.speag.com Certificate of Conformity / First Article Inspection SAM Twin Phantom V4.0 Type No Series No Manufactures QD 000 P40 0 TP-1150 and higher Zeughausstrasse 43 CH-8004 Zürich Switzerland

Tests

The series production process used allows the smitstion to test of first articles.

Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been refested using further series items (called samples) or are tested at each item.

Test	Requirement	Details	Units tested
Dimensions	Compliant with the geometry according to the CAD model.	IT'IS CAD File (*)	First article, Samples
Material thickness of shell	Compliant with the requirements according to the standards	2mm +/- 0,2mm in flat and specific areas of head section	First article, Samples, TP-1314 ff.
Material thickness at ERP	Compliant with the requirements according to the standards	6mm +/- 0.2mm at ERP	First article, All items
Material parameters	Dielectric parameters for required frequencies	300 MHz – 6 GHz: Relative permittivity < 5, Loss tangent < 0.05	Material samples
Material resistivity The material has been lested to be compatible with the liquids defined in the standards if handled and cleaned according to the instructions. Observe technical Note for material compatibility.		DEGMBE based simulating liquids	Pre-series, First article, Malenal samples
Sagging	Compliant with the requirements according to the standards. Sagging of the flat section when filled with tissue simulating liquid.	< 1% typical < 0.8% if filled with 155mm of HSL900 and without DUT below	Prototypes, Sample testing

- Standards [1] CENELEC EN 50361 [2] IEEE Sid 1528-2003 [3] IEC 62209 Part I

- FCC OET Bulletin 85, Supplement C, Edition 01-01
 The IT'S CAD file is derived from [2] and is also within the tolerance requirements of the shapes of

Signature / Stamp

Based on the sample tests above, we cartify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standards [1] to [4].

07.07.2005

Schmitt & Person Engineering AQ Zerügheungstens 43, 80,04 Zorlief, Grittmet Phone s41, 1,965 WKD0 Fase 45 by 246 9773

Direction 881 - QQ 000 040 C-F

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 163 of 216

10. System Validation from Original Equipment Supplier

Calibration Laboratory of Schmid & Partner Engineering AG Zoughausstrasse 43, 8004 Zurich, Switzerland





According by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatures to the EA Multilateral Agreement for the recognition of calibration certificates

Client SGS-TW (Auden)

Accreditation No.: SCS 0108

Certificate No: D750V3-1015 Aug 16

	ERTIFICATE		
Citrioci	D750V3 - SN: 10	115	
Calibration procedure(s)	QA CAL-05.v9	dure for dipole validation kits abo	ove 700 MHz
	Section delivery processes	data to apone remains into the	Are Townse
Cartrainn date:	August 30, 2016		
The measurements and the unce	rtainties with confidence p	ional standards, which realize the physical un robability are given on the following pages an ry facility: environment temperature (22 ± 3)*	d are part of the certificate.
Calibration Equipment used (M&)	FE critical for calibration)		
Primary Standards	(DA	Cal Date (Certificate No.)	Schaduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02288)	Apr-17
	Str. Jakalii	and the state of the second	4.77.12
Power sensor NRP-Z91	SN: 103244	06-Apr-15 (No. 217-02288)	Apr-17
Service and the Service of Servic	SN: 100245	06-Apr-16 (No. 217-02288) 06-Apr-16 (No. 217-02289)	Apr-17 Apr-17
Power sensor NAP-Z91	20134901		
Power sensor NAP-291 Reference 20 dB Attenuator	SN: 100245	06-Apr-16 [No. 217-02289]	Apr-17
Power sensor NAP-291 Reference 20 dB Attenuator Type-N mismatch combination	SN: 100245 SN: 5068 (20k)	06-Apr-16 (No. 217-02280) 05-Apr-16 (No. 217-02292)	Apr-17 Apr-17
Power sensor NRP-291 Reference 20 dB Attenuator Type-N mismatch combination Reference Prote EX3DV4	SN: 100245 SN: 5068 (20x) SN: 5047.2 / 06327	06-Apr-16 (No. 217-02280) 06-Apr-16 (No. 217-02292) 06-Apr-16 (No. 217-02295)	Apr-17 Apr-17 Apr-17
Power sensor NRP-791 Power sensor NRP-791 Reterence 20 dB Attenuator Type-N mismatch combination Reterence Prote EX3094 DAE4 Secondary Standards	SN: 169245 SN: 566B (20k) SN: 5947.2 / 06327 SN: 7349	06-Apr-16 (No. 217-02280) 06-Apr-16 (No. 217-02292) 06-Apr-16 (No. 217-02290) 15-Jun-16 (No. EX3-7349 Jun16) 30-Cec-15 (No. DAE4-601 Dec15) Check Date (in house)	Apr.17 Apr.17 Apr.17 Jun-17 Dac-16 Scheduled Check
Power sensor NAP-291 Retarence 20 dB Attenuator Type-N miserialth combination Reference Probe EX3094 DAE4 Secondary Standards	SN: 100245 SN: 5068 (20k) SN: 5047.2 / 06327 SN: 7349 SN: 601	06-Apr-16 (No. 217-02289) 05-Apr-16 (No. 217-02292) 05-Apr-16 (No. 217-02295) 15-Jun-16 (No. EX3-7349 _aun16) 30-Cec-15 (No. DAE4-601 _Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222)	Apr.17 Apr.17 Apr.17 Jun-17 Dec-16 Scheduled Check In house check: Oct-16
Power sensor NAP-291 Retarence 20 cB Attenuator Type-N mismatch combination Reterence Prote EX3DV4 DAE4 Secondary Standards Power moter EPM-442A	SN: 160245 SN: 5068 (20k) SN: 5047.2 / 06327 SN: 7349 SN: 601	06-Apr-16 (No. 217-02280) 06-Apr-16 (No. 217-02292) 06-Apr-16 (No. 217-02290) 15-Jun-16 (No. EX3-7349 Jun16) 30-Cec-15 (No. DAE4-601 Dec15) Check Date (in house)	Apr-17 Apr-17 Apr-17 Jun-17 Dac-16 Scheduled Check In house check: Oct-16 In house check: Oct-16
Power sensor NAP-291 Retarence 20 dB Attenuator Type-N mismatch combination Reterence Prote EX3DV4 DAE4 Secondary Standards Power Index EPM-442A Power stansor HP 8481A	SN: 193245 SN: 5958 (20k) SN: 5947.2 / 06327 SN: 7349 SN: 601	06-Agr-16 (No. 217-02289) 06-Agr-16 (No. 217-02299) 05-Agr-16 (No. 217-02299) 15-Jun-16 (No. EX3-7349 Jun16) 30-Cec-15 (No. DAE4-601 Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-16 (No. 217-02222)	Apr.17 Apr.17 Apr.17 Jun-17 Dac-16 Scheduled Check In house check: Oct-16 In house check: Oct-16 In house check: Oct-16
Power sensor NRP-291 relaterace 20 dB Attenuator Fyge-N mismatch combination Reterence Prote EX3DV4 DAE4 Secondary Standards Power tester EPM-442A Power sensor HP 8481A	SN: 100245 SN: 5008 (20tr) SN: 5047.2 / 06027 SN: 7349 SN: 601 ID 4 SN: G837400704 SN: US37282783	06-Apr-16 (No. 217-02289) 06-Apr-16 (No. 217-02292) 06-Apr-16 (No. 217-02295) 15-Jun-16 (No. EX3-7349_aun16) 30-Celc-15 (No. DAE4-601_Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222)	Apr.17 Apr.17 Apr.17 Jun-17 Dac-16 Scheduled Check In house check: Oct-16
Power sensor NRP-291 Reterence 20 dB Attenuator Type-N mismatch combination Reterence Prote EX30V4 DAE4 Secondary Standards Power Inster EPM-442A Power sensor HP 8481A Procerator R&S SMT-06	SN: 160245 SN: 5608 (20k) SN: 5647.2 / 06327 SN: 7349 SN: 601 ID 4 SN: G837480704 SN: USS7282783 SN: MY41082317	06-Agr-16 (No. 217-02289) 06-Agr-16 (No. 217-02299) 05-Agr-16 (No. 217-02299) 15-Jun-16 (No. EX3-7349 Jun16) 30-Cec-15 (No. DAE4-601 Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-16 (No. 217-02222)	Apr.17 Apr.17 Apr.17 Jun-17 Dac-16 Scheduled Check In house check: Oct-16
Power sensor NRP-291 Retarence 20 dB Attenuator Type-N mismatch combination Retarence Probe EX3094 DAE4 Secondary Standards Power motor EPM-442A Power sensor HP 8481A Pfromer sensor HP 8481A RF generator R&S SMT-06	SN: 160245 SN: 5668 (20%) SN: 5647.2 / 06327 SN: 5647 SN: 661 SN: GB37480704 SN: US37282783 SN: MY41092317 SN: 100372 SN: US37390585	06-Apr-16 (No. 217-02289) 06-Apr-16 (No. 217-02292) 06-Apr-16 (No. 217-02292) 15-Jun-16 (No. EX3-7349 _Jun-16) 30-Cec-15 (No. DAE4-601 _Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-16 (No. 217-02222) 07-Oct-15 (No. 217-02223) 15-Jun-15 (No. 217-02223) 15-Jun-15 (no. 217-02223) 15-Jun-15 (no. 217-02223)	Apr-17 Apr-17 Apr-17 Jun-17 Dec-16
Power sensor NRP-291 Retarence 20 GB Attenuator Type-N mismalch combination Retarence Prote EX3DW4 DAE4 Secondary Standards Power advisor HP 8481A Power sensor HP 8481A	SN: 193245 SN: 5968 (20k) SN: 5947.2 / 06327 SN: 7349 SN: 601 ID 4 SN: G837460704 SN: USS7282783 SN: MY41982317 SN: 193072 SN: USS7390585	06-Apr-16 (No. 217-02289) 05-Apr-16 (No. 217-02292) 05-Apr-16 (No. 217-02292) 15-Jun-16 (No. EX3-7349 Jun16) 30-Dec-15 (No. DAE4-601 Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 15-Jun-15 (No. 217-02223) 15-Jun-15 (n house check Jun-15) 18-Oct-01 (in house check Oct-15)	Apr.17 Apr.17 Apr.17 Jun-17 Dac-16 Scheduled Check In house check: Oct-16
Power sensor NRP-291 Reterence 20 GB Attenuator Type-N mismalch combination Reterence Prote EX3DV4 DAE4 Secondary Standards Power motor EPM-442A Power sensor HP 8481A Promer sensor HP 8481A HF ceneralor R&S SMT-06 Network Analyzer HP 8763E	SN: 160245 SN: 5668 (20%) SN: 5647.2 / 06327 SN: 5647 SN: 661 SN: GB37480704 SN: US37282783 SN: MY41092317 SN: 100372 SN: US37390585	06-Apr-16 (No. 217-02289) 06-Apr-16 (No. 217-02292) 06-Apr-16 (No. 217-02292) 15-Jun-16 (No. EX3-7349 _Jun-16) 30-Cec-15 (No. DAE4-601 _Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-16 (No. 217-02222) 07-Oct-15 (No. 217-02223) 15-Jun-15 (No. 217-02223) 15-Jun-15 (no. 217-02223) 15-Jun-15 (no. 217-02223)	Apr.17 Apr.17 Apr.17 Jun-17 Dac-16 Scheduled Check In house check: Oct-16

Certificate No: D750V3-1015_Aug16

Page 1 at 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents of the limitation of limitation of limitation of limitation of limitation of limitation and inviscion of service defined documents at wave see com/terms_and conditions for Electronic Documents at wave see com/terms_and document by a limitation of limitation of limitation of limitation and inviscion of service defined documents.

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 164 of 216

Calibration Laboratory of Schmid & Partner Engineering AG Zaugheusstrasse 43, 8004 Zurich, Switzerland





Service suisse d'étalonnage C Servizio avizzaro di tarature Swiss Calibration Service

condition No.: SCS 0108

According by the Swiss Accordington Service (SAS) The Swise Accorditation Service is one of the signatories to the EA Multisterni Agreement for the recognition of calibration certificans

Glossary:

TSL tissue simulating liquid

ConvF sensitivity in TSL / NORM x,y,z N/A not applicable or not measured

Calibration is Performed According to the Following Standards.

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) In the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013

b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)". February 2005

IEC 62209-2, "Procedure to determine the Specific Absorption Rata (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010

d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end. of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D750V3 1015 Aug10

Page 2 of 6

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 165 of 216

Measurement Conditions

DASY system configuration, as far as not given on page 1

DASY Version	DASY5	V52.8.B
Extrapolation	Advanced Extrapolation	
Phanton	Modular Flat Phanton	
Distance Dipole Center - TSL.	19 mm.	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 m/no/m
Measured Head TSL parameters	(22,0 ± 0.2) °C	42.4 ± 6 %	0.91 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	-	

SAR result with Head TSL

SAR averaged over 1 cm ² (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.11 W/kg
SAR for nominal Head TSL parameters	normalized to 1V9	8.32 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.38 W/kg
SAR for nominal Head TSL parameters	Wr of beginnen	5.45 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22,0 °C	55.5	0,96 mho/m
Measured Body TSI, parameters	(22.0 ± 0.2) °C	54.9 ± 6 %	0,99 mhs/m ± 6 %
Body TSL temperature change during feet	< 0.5 °C	-	-

SAR result with Body TSL

SAR averaged over 1 cm2 (1 g) of Body TSL	Condition	
SAFI measured	250 mW input power	2,25 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.77 W/kg ± 17.0 % (k±2)

SAR averaged over 10 cm1 (10 g) of Body TSL	nontition	
SAFI measured	250 mW input power	1.47 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.76 W/kg ± 16.5 % (k±2)

Certificate No: 0750V3-1015_Aug16

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The company is the company in the limits of the Client's instructions, if any. The company is the company in the limits of the Client's instructions, if any. The company is the company in the company in the company in the company is the company in the company is the company in the company in the company in the company is the company in the company in the company in the company is the company in the company in the company in the company in the company is the company in the c

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 166 of 216

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.1 Ω - 0.2 <u>μ</u> Ω	
Return Loss	30.5 dB	

Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.0 0 2.6 0	
Return Loss	30.5 dB	

General Antenna Parameters and Design

Electrical Delay (one direction)	1,037 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard similigid coaxial cable. The center conductor of the leading line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the clipple arms in order to improve matching when leaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR date are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be explied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG	
Manufactured on	March 22, 2010	

Cartilicate No. 0780V3-1015_Aug16

Page 4 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 167 of 216

DASY5 Validation Report for Head TSL

Date: 30,08,2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1015

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: f = 750 MHz, $\sigma = 0.91 \text{ S/m}$; $\varepsilon_t = 42.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(10.07, 10.07, 10.07); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12,2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 58.26 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 3.16 W/kg SAR(1 g) = 2.11 W/kg; SAR(10 g) = 1.38 W/kgMaximum value of SAR (measured) = 2.81 W/kg

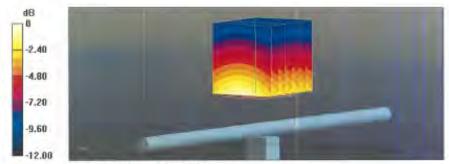

0 dB = 2.81 W/kg = 4.49 dBW/kg

Certificate No: D750V3-1015_Aug16

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 168 of 216

DASY5 Validation Report for Body TSL

Date: 30.08.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1015

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: l = 750 MHz; $\sigma = 0.99 \text{ S/m}$; $\epsilon_r = 54.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(9.99, 9.99, 9.99); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001.
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 57.47 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 3.39 W/kg SAR(1 g) = 2.25 W/kg; SAR(10 g) = 1.47 W/kgMaximum value of SAR (measured) = 2.97 W/kg



0 dB = 2.97 W/kg = 4.73 dBW/kg

Certificate No: D750V3-1015_Aug16

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488

www.tw.sas.com



Page: 169 of 216

Impedance Measurement Plot for Body TSL

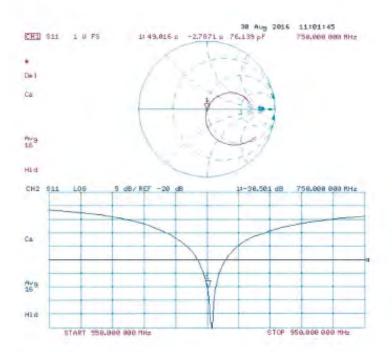

Certificate No: D750V3-1015_Aug16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 170 of 216

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
S Swiss Colibration Service

Acception by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the eignistories to the EA.

Multilateral Agreement for the recognition of calibration certificates

Client SGS-TW (Auden)

Accreditation No. SCS 0108

Cortificate No: D1750V2-1008_Aug16

Object	D1750V2 - SN:1008		
Calibration procedure(s)	QA CAL-05.v9 Calibration proce	dure for dipole validation kits abo	ive 700 MHz
Calibration date:	August 31, 2016		
This cathration perfillents docum	ents the traceability to not	onal standards, which roulize the physical un	its of measurements (SI)
The measurements and the unce	rtainties with confidence p	robability are given on the following pages an	diare part of the cestificate.
All calibrations have been conduc	sted in the closed laborator	ry lacility: environment temperature (25° \pm 3) $^{\circ}$	and humidity < 70%.
Calibration Equipment used (M&T	E critical for calibration)		
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NAP	SN: 164778	06-Api-16 (No. 217-82288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apt-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	08-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
	SN: 5047.2 / 06327		
Type-N mismatch combination	Statement of the Commercial Comme	05-Apr-16 (No. 217-02295)	Apr-17
Type-N mismatch combination Reference Probe EX3DV4	SN: 7349	05-Apr-18 (No. 217-02296) 15-Jun-18 (No. EX3-7348_Jun16)	Apr-17 Jun-17
	Contract to the Contract to		
Reference Probe EX3DV4	SN: 7349	15-Jun-16 (No. EX3-7345_Jun16)	Jun-17
Reference Probe EX3DV4 DAE4	SN: 7349 SN: 601	15-Jun-16 (No. EX3-7345_Jun16) 30-Dec-15 (No. DAE4-601_Dec15)	Jun-17 Dec-16
Rafarence Probe EX3DV4 DAE4 Secondary Standards	SN: 7348 SN: 601	15-Jun-16 (No. EX3-7349_Jun15) 30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house)	Jun-17 Dec-16 Scheduled Check In house sheck: Oct-16
Rafarence Probe EX3DV4 DAE4 Secondary Standards Power mater EPM-442A	SN: 7348 SN: 601 ID 4 SN: GB37480704	15-Jun-16 (No. EX3-7349_Jun15) 30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222)	Jun-17 Dac-16 Scheduled Check In house sheck: Oct-16 In house check: Oct-16
Rafarence Probe EX3DV4 DAE4 Secondary Standards Power mater EPN-442A Power sensor HP 8481A	SN: 7349 SN: 601 ID 4 SN: GB37480704 SN: US37202783	15-Jun-16 (No. EX3-7348_Jun16) 30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222)	Jun-17 Dac-16 Scheduled Check
Reference Probe EX3DV4 DAE4 Secondary Standards Power mater EPN-442A Power sensor HP 8461A	SN: 7349 SN: 601 ID 4 SN: GB37480704 SN: US37202783 SN: MY41092317	15-Jun-16 (No. EX3-7348_Jun16) 30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223)	Jun-17 Dec-16 Scheduled Check In house check Oct-16 In house check Oct-16 In house check Oct-16
Reference Picto EX3DV4 DAE4 Secondary Standards Power mater EPN-442A Power sensor HP 8481A RF generator RSS SMT-00	SN: 7348 SN: 601 SN: GB37480704 SN: US37292783 SN: MY41092317 SN: US37390586	15-Jun-16 (No. EX3-7348_Jun16) 30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 15-Jun-15 (in house check Jun-15) 18-Oct-01 (in house check Cot-15)	Jun-17 Dec-16 Scheduled Check In house check: Oct-16 In house check: Oct-16 In house check: Oct-16 In house check: Oct-16
Fafarence Probe EX3DV4 DAE4 Secondary Standards Power meter EPN-442A Power sensor HP 8481A Power sensor HP 8481A PF generator R&S SMT-05 Network Analyzer HP 8753E	SN: 7349 SN: 601 SN: 6037480704 SN: G837480704 SN: US37292783 SN: MY41092317 SN: 100972 SN: US37390586	15-Jun-16 (No. EX3-7348_Jun16) 30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 15-Jun-15 (in house check Jun-15) 18-Oct-01 (in house check Dec15)	Jun-17 Dec-16 Scheduled Check In house check: Oct-16 In house check: Oct-16 In house check: Oct-18
Reference Picto EX3DV4 DAE4 Secondary Standards Power mater EPN-442A Power sensor HP 8481A RF generator RSS SMT-00	SN: 7348 SN: 601 SN: GB37480704 SN: US37292783 SN: MY41092317 SN: US37390586	15-Jun-16 (No. EX3-7348_Jun16) 30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 15-Jun-15 (in house check Jun-15) 18-Oct-01 (in house check Cot-15)	Jun-17 Dec-16 Scheduled Check In house check: Oct-16 In house check: Oct-16 In house check: Oct-16 In house check: Oct-16
Reference Picto EX3DV4 DAE4 Secondary Standards Power mater EPN-442A Power sensor HP R401A Power sensor HP R481A RF generator RSS SMT-05 Network Analyzer HP 8753E Calibrated by:	SN: 7348 SN: 601 SN: 6837480704 SN: GB37480704 SN: US37292783 SN: MY41032317 SN: 100972 SN: US37390585 Name Jefrances Kurkka	15-Jun-16 (No. EX3-7348_Jun16) 30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 15-Jun-15 (in fouse check Jun-15) 18-Oct-01 (in fouse check Jun-15) Function Laboratory Technicism	Jun-17 Dac-16 Scheduled Check In house check: Oct-16 In house check: Oct-16 In house check: Oct-16 In house check: Oct-16
Fafarence Probe EX3DV4 DAE4 Secondary Standards Power meter EPN-442A Power sensor HP 8481A Power sensor HP 8481A PF generator R&S SMT-05 Network Analyzer HP 8753E	SN: 7349 SN: 601 SN: 6037480704 SN: G837480704 SN: US37292783 SN: MY41092317 SN: 100972 SN: US37390586	15-Jun-16 (No. EX3-7348_Jun16) 30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 15-Jun-15 (in house check Jun-15) 18-Oct-01 (in house check Dec15)	Jun-17 Dac-16 Scheduled Check In house check: Oct-1 In house check: Oct-1 In house check: Oct-1 In house check: Oct-1

Cereficate No: D1750V2-1008_Aug16

Page 1 of 8

This calibration certificate shall not be reproduced except in full without written approval of the laboratory

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

Issued: August 31, 2016



Page: 171 of 216

Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





C

Service suisse d'étalonnage Servizio svizzoro di terniure Swiss Calibration Service

Actrecitation No.: SCS 0108

Accredited by the Swise Accreditions Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL tissue simulating liquid ConvF sensitivity in TSL / NORM x,y,z N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques*, June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)*, February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30) MHz to 6 GHz)*, March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions, Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAFI result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D1750V2-1006, Aug 16.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 172 of 216

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phanton	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	-40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40:3 ± 6 %	1:37 mha/m ± 8 %
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	37.2 W/kg = 17.0 % (k=2)

SAR everaged over 10 cm3 (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.90 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.6 W/kg ± 16.5 % (k=2).

Body TSL parameters

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53,4	1,49 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	50.1 ± 6 %	1.49 mho/m ± 6.%
Body TSL temperature change during test	< 0.5 °C	-	-

SAR result with Body TSL

SAR averaged over 1 cm2 (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.34 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	37.3 W/kg + 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	4.96 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	19.9 W/kg ± 16.5 % (k=2)

Certificate No. D1750V2-1009_Aug18

Page II of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 173 of 216

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to load point	51.0 Ω - 0.2 jΩ	
Return Loss	-40.1 dB	

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.7 Ω - 0.5 jΩ
Return Loss	→ 29,3 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.221 ris
and the state of t	

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The entenna is therefore short-circulied for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR date are not affected by this change. The overell dipole length is still according to the Standard

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections pear the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	May 27, 2003

Cartillonie No: D1756V2-1008_Aug16

Page 4 of B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 174 of 216

DASY5 Validation Report for Head TSL

Date: 24.08.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1008

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: f = 1750 MHz; $\sigma = 1.37 \text{ S/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)


DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(8.46, 8.46, 8.46); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 105.8 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 17.2 W/kg

SAR(1 g) = 9.28 W/kg; SAR(10 g) = 4.9 W/kgMaximum value of SAR (measured) = 14.3 W/kg

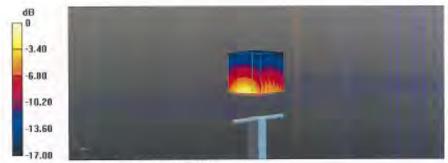

0 dB = 14.3 W/kg = 11.55 dBW/kg

Certificate No: D1750V2-1008_Aug16

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 175 of 216

Impedance Measurement Plot for Head TSL

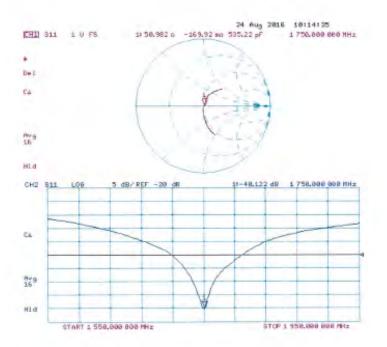

Certificate No: D1750V2-1008_Aug16

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 176 of 216

DASY5 Validation Report for Body TSL

Date: 31.08.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial; D1750V2 - SN:1008

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: f = 1750 MHz; $\sigma = 1.49 \text{ S/m}$; $\varepsilon_c = 53.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)


DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(8.25, 8.25, 8.25); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 100.8 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 9.34 W/kg; SAR(10 g) = 4.98 W/kgMaximum value of SAR (measured) = 13.9 W/kg



0 dB = 13.9 W/kg = 11.43 dBW/kg

Certificate No: D1750V2-1008_Aug16

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488

www.tw.sas.com



Page: 177 of 216

Impedance Measurement Plot for Body TSL

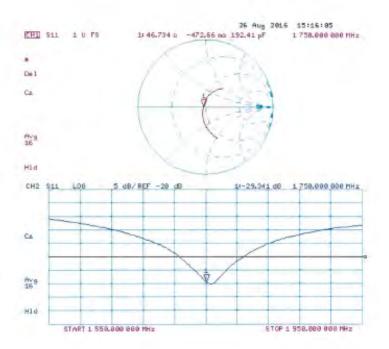

Certificate No: D1750V2-1008_Aug16

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 178 of 216

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalltrierdienst S Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accredited by the Swise Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates Accreditation No.: SCS 0108

SGS-TW (Auden)

Certificate No: D1900V2-5d027 Apr16

	ERTIFICATE		
Object	D1900V2 - SN: 5	d027	
Calibration procedure(s)	QA CAL-05.v9 Calibration proce	dure for dipole validation kits abo	ve 700 MHz
College of the Colleg	Au-3 05 0010		
Calibration date	April 25, 2016		
The measurements and the unce	rtainties with confidence p	coal standards, which realize the physical or endeability are given on the following pages an ry facility: environment temperature (22 ± 3)°0	d are part of the certificate.
Calibration Equipment used (M87	E critical for calibration)		
Primary Standards	1D #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NAP	SN: 104778	06-Apr-16 (No. 217-02288/02389)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr.17
Power sensor NRP-Z91	SN: 103245	05-Apr-16 (No. 217-02289)	Apr-17.
Reference 20 dB Attenuator	5N: 5058 (20k)	95-Apr-16 (No. 217-02292)	Apr-17
	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02295)	Apr-17
Type-N mismaich combination		NA The AT INC. THE TOTAL TRANSPORT	D60-16
A STATE OF THE STA	SN: 7349	31-Dec-15 (No. EX3-7349_Dec15)	and the state of t
Reference Probe EX3DV4	SN: 7349 SN: 601	30-Dec-15 (No. DAE4-501, Dec15)	Dec-16
Type-N mismaich combination Reference Probe EX3DV4 DAE4 Secondary Standards	100000		W. Printer, The
Reference Probe EX3DV4 DAE4 Secondary Standards	SN: 601	30-Dec-15 (No. DAE4-601, Dec15)	Dec-16
Reference Probe EX3DV4 DAE4	SN: 601	30-Dec-15 (No. DAE4-601, Dec15) Check Date (in kouse)	Dec-16 Scheduled Check
Reference Probe EX3DV4 DAE4 Secondary Standards Power meter EPM-442A	SN: 601 IO # SN: GB37480704	30-Dec-15 (No. DAE4-601, Dec15) Check Date (In house) 07-Oct-15 (No. 217-02222)	Dec-16 Scheduled Check In House check: Oct-16.
Reference Probe EX3DV4 DAE4 Secondary Standards Power meter EPM-442A Power sensor HP 8481A	SN: 601 IO # SN: GB37480704 SN: US37292783	30-Dec-15 (No. DAE4-601, Dec15) Check Date (In house) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 2)7-02222)	Scheduled Check in house check: Oct-16 in house check: Oct-16
Reference Probe EX3DV4 DAE4 Secondary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A RF generator RAS SMT-06	SN: 601 ID # SN: GB37480704 SN: US37292783 SN: MY41092317	30-Dec-15 (No. DAE4-601, Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223)	Scheduled Check in house check: Oct-16 in house check: Oct-16 to house check: Oct-16
Reference Probe EX3DV4 DAE4 Secondary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A RF generalor RAS SMT-06	SN: 601 IO # SN: GB37480704 SN: US37292783 SN: WY41032317 SN: 100972	30-Dec-15 (No. DAE4-601 Dec15) Check Date (In Incuse) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 15-Jun-15 (In Incuse check Jun-15)	Scheduled Check in house check: Oct-16 in house check: Oct-16 in house check: Oct-16 in nouse check: Oct-16
Reference Probe EX3DV4 DAE4 Secondary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A RF generator R&S SMT-06 Network Analyzer HP 8753E	SN: 601 IO # SN: GB37480704 SN: US37292783 SN: MY41032317 SN: 100972 SN: US37390685	30-Dec-15 (No. DAE4-601, Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 07-Oct-15 (No. 217-02223) 15-Jun-15 (in house check Jun-15) 16-Oct-01 (in house check Dct-15)	Scheduled Check In house check: Oct-16
Reference Probe EX3DV4 DAE4 Secondary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A RF generalor RAS SMT-06	SN: 601 IO # SN: GBS7480704 SN: USS7292783 SN: MY41032317 SN: 100872 SN: USS7390685	30-Dec-15 (No. DAE4-601, Dec15) Check Date (in knose) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 15-Jun-15 (in house check Jun-15) 16-Oct-01 (in house check Oct-15) Function	Scheduled Check in house check: Oct-16 in house check: Oct-16 in house check: Oct-16 in house check: Oct-16 in house check: Oct-16
Reference Probe EX3DV4 DAE4 Secondary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A RF generalize RAS SMT-06 Network Analyzer HP 8753E	SN: 601 IO # SN: GBS7480704 SN: USS7292783 SN: MY41032317 SN: 100872 SN: USS7390685	30-Dec-15 (No. DAE4-601, Dec15) Check Date (in knose) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 15-Jun-15 (in house check Jun-15) 16-Oct-01 (in house check Oct-15) Function	Scheduled Check In house check Oct-16

Certificate No: D1900V2-5d027_Apr16

Page 1 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 179 of 216

Calibration Laboratory of Schmid & Partner Engineering AG sstrasse 43, 8004 Zurich, Switzerland





C Servizio svizzaro di taraturo Swiss Calibration Service

Accepted by the Sweet Acceptation Service (SAS) Accreditation No.: SCS 0108

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL tissue simulating liquid sensitivity in TSL / NORM x,y,z ConvE not applicable or not measured N/A

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) In the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, 'Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)*, February 2005
- IEC 82209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Gertificate No: D1900V2-5d027, April-

Page 2 of B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Page: 180 of 216

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.0 ± 6 %	1.37 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL

SAR averaged over 1 cm3 (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.55 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	38.7 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.03 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	20.3 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.9 ± 6 %	1.49 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

SAR result with Body TSL

SAR averaged over 1 cm3 (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.83 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	39.7 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.21 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.0 W/kg ± 16.5 % (k=2)

Certificate No: D1900V2-5d027_Apr16

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 181 of 216

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.8 Ω + 4.4 jΩ
Return Loss	- 27.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.5 Ω + 5.6 jΩ
Return Loss	- 23.3 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.196 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	December 17, 2002

Certificate No: D1900V2-5d027_Apr16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

Page 4 of 8

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Page: 182 of 216

DASY5 Validation Report for Head TSL

Date: 25,04.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d027

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: f = 1900 MHz; $\sigma = 1.37 \text{ S/m}$; $\varepsilon_c = 40$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(8.2, 8.2, 8.2); Calibrated: 31.12,2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 106.9 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 17.2 W/kg SAR(1 g) = 9.55 W/kg; SAR(10 g) = 5.03 W/kgMaximum value of SAR (measured) = 14.3 W/kg

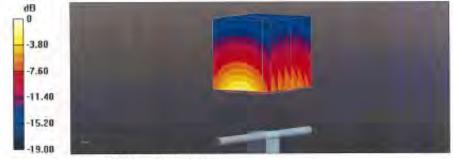

0 dB = 14.3 W/kg = 11.55 dBW/kg

Certificate No: D1900V2-6d027_Apr16

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 183 of 216

Impedance Measurement Plot for Head TSL

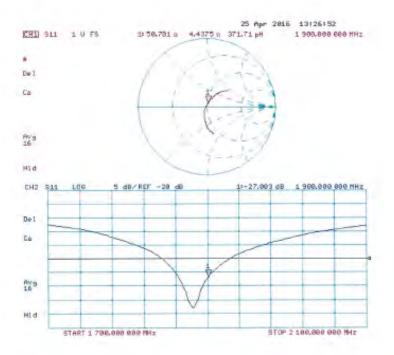

Certificate No: D1900V2-5d027_Apr16

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 184 of 216

DASY5 Validation Report for Body TSL

Date: 25.04.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d027

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: f = 1900 MHz; $\sigma = 1.49 \text{ S/m}$; $\varepsilon_c = 52.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(8.03, 8.03, 8.03); Calibrated; 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002.
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372).

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 104.2 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 17.2 W/kg SAR(1 g) = 9.83 W/kg; SAR(10 g) = 5.21 W/kgMaximum value of SAR (measured) = 14.7 W/kg

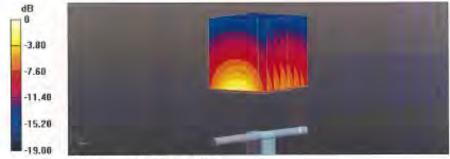

0 dB = 14.7 W/kg = 11.67 dBW/kg

Certificate No: D1900V2-5d027_Apr16

Page 7 of E

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 185 of 216

Impedance Measurement Plot for Body TSL

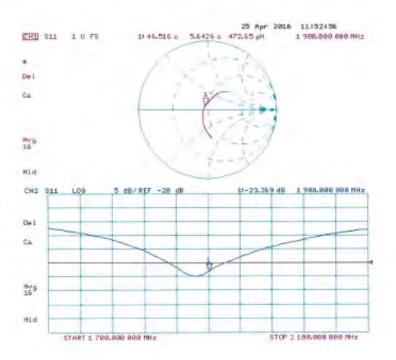

Certificate No: D1900V2-5d027_Apr16

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 186 of 216

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizilo svizzero di taratura
S Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client SGS-TW (Auden)

Cartificate No. D2450V2-727 April 6

	ERTIFICATE		
Object	D2450V2 - SN:72	27	
Calibration procedure(s)	QA CAL-05.v9 Calibration proce	dure for dipole validation kits abo	ove 700 MHz
Calibration date:	April 19, 2016		
The measurements and the unce	rtainties with confidence p	onal alandards, which realize the physical un robability are given on the following pages an ry facility: environment temperature (22 ± 3)**	id are part of the certificate.
Calibration Equipment used (M&)	TE critical for calibration)		
rimary Standards	ID#	Cal Date (Certificate No.)	Scheduled Calibration
sories A continues			
	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
ower meter NRP	SN: 104778 SN: 103244	06-Apr-16 (No. 217-02288/02289) 06-Apr-16 (No. 217-02288)	Apr-17 Apr-17
ower meter NRP ower sensor NRP-Z91	1200 1200 1200	and the first of the state of t	- Conference
ower meter NRP lower sensor NRP-Z91 ower sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator	SN: 103244 SN: 103245	06-Apr-16 (No. 217-02288) 06-Apr-16 (No. 217-02289)	Apr-17 Apr-17
Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination	SN: 103244 SN: 103245 SN: 5058 (20k)	06-Apr-16 (No. 217-02288) 06-Apr-16 (No. 217-02289) 05-Apr-16 (No. 217-02292)	Apr-17 Apr-17 Apr-17
Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Reference Probe EX3DV4 DAE4	SN: 103244 SN: 103245 SN: 5058 (20k) SN: 5047.2 / 06327	06-Apr-16 (No. 217-02288) 06-Apr-16 (No. 217-02289) 05-Apr-16 (No. 217-02292) 06-Apr-16 (No. 217-02295)	Apr-17 Apr-17 Apr-17 Apr-17
Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Reference Probe EX3DV4	SN: 103244 SN: 103245 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 7349	06-Apr-16 (No. 217-02288) 06-Apr-16 (No. 217-02289) 05-Apr-16 (No. 217-02292) 06-Apr-16 (No. 217-02295) 31-Dec-15 (No. EX3-7349 Dec15)	Apr-17 Apr-17 Apr-17 Apr-17 Dec-16
Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Reference Probe EX3DV4 DAE4 Recondary Standards	SN: 103244 SN: 103245 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 7349 SN: 601	06-Apr-16 (No. 217-02288) 06-Apr-16 (No. 217-02289) 06-Apr-16 (No. 217-02292) 06-Apr-16 (No. 217-02292) 31-Dec-15 (No. EX3-7349 Dec-15) 30-Dec-15 (No. DAE4-601_Dec-15)	Apr-17 Apr-17 Apr-17 Apr-17 Dec-16 Dec-16
Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Reference Probe EX3DV4 DAE4 Recondary Standards Power meter EPM-442A	SN: 103244 SN: 103245 SN: 5058 (204) SN: 5047.2 / 06327 SN: 7349 SN: 601	06-Apr-16 (No. 217-02288) 06-Apr-16 (No. 217-02289) 06-Apr-16 (No. 217-02292) 06-Apr-16 (No. 217-02295) 31-Dec-15 (No. EX3-7349 Dec15) 30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house)	Apr-17 Apr-17 Apr-17 Apr-17 Dec-16 Dec-16 Scheduled Check In house check: Oct-16
Tower meter NRP Tower sensor NRP-Z91 Tower meter Probe EX3DV4 Tower meter EPM-442A Tower sensor HP 8481A	SN: 103244 SN: 103245 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 7349 SN: 601	06-Apr-16 (No. 217-02288) 06-Apr-16 (No. 217-02289) 05-Apr-16 (No. 217-02292) 05-Apr-16 (No. 217-02292) 31-Dec-15 (No. EX3-7349 Dec15) 30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house)	Apr-17 Apr-17 Apr-17 Apr-17 Dec-16 Dec-16 Scheduled Check In house check: Oct-16 In house check: Oct-16
ower meter NRP ower sensor NRP-Z91 ower sensor NRP-Z91 elerence 20 dB Attenuator ype-N mismatch combination eference Probe EX3DV4 AE4 econdary Standards ower meter EPM-442A ower sensor HP 8481A	SN: 103244 SN: 103245 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 7349 SN: 501	06-Apr-16 (No. 217-02288) 06-Apr-16 (No. 217-02289) 05-Apr-16 (No. 217-02292) 05-Apr-16 (No. 217-02295) 31-Dec-15 (No. EX3-7349 Dec15) 30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house) 07-Oct-16 (No. 217-02222) 07-Oct-15 (No. 217-02222)	Apr-17 Apr-17 Apr-17 Apr-17 Dec-16 Dec-16 Scheduled Check In house check: Oct-16 In house check: Oct-16 In house check: Oct-16
Tower meter NRP Tower sensor NRP-Z91 Tower sensor NRP-Z91 Seference 20 dB Attenuator Type-N mismatch combination Seference Probe EX3DV4 DAE4 Secondary Standards Tower meter EPM-442A Tower sensor HP 8481A Tower sensor HP 8481A Tower sensor HP 8481A	SN: 103244 SN: 103245 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 7349 SN: 501 ID # SN: GB37480704 SN: US37292783 SN: MY41092317	06-Apr-16 (No. 217-02288) 06-Apr-16 (No. 217-02289) 06-Apr-16 (No. 217-02292) 06-Apr-16 (No. 217-02295) 31-Dec-15 (No. EX3-7349 Dec15) 30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222)	Apr-17 Apr-17 Apr-17 Apr-17 Dec-16 Dec-16 Scheduled Check In house check: Oct-16 In house check: Oct-16 In house check: Oct-16 In house check: Oct-16
Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Rype-N mismatch combination Reference Probe EX3DV4 DAE4	SN: 103244 SN: 103245 SN: 6058 (20k) SN: 5047.2 / 06327 SN: 7349 SN: 601 ID # SN: GB37480704 SN: US37292783 SN: MY41092317 SN: 100972	06-Apr-16 (No. 217-02288) 06-Apr-16 (No. 217-02289) 06-Apr-16 (No. 217-02292) 06-Apr-16 (No. 217-02292) 06-Apr-16 (No. 217-02295) 31-Dac-15 (No. EX3-7349 Dec15) 30-Dec-15 (No. DAE4-601 Dec15) Check Date (in house) 07-Oct-16 (No. 217-02222) 07-Oct-16 (No. 217-02223) 15-Jun-15 (in house check Jun-15)	Apr-17 Apr-17 Apr-17 Apr-17 Dec-16 Dec-16 Scheduled Check In house check: Oct-16 In house check: Oct-16 In house check: Oct-16 In house check: Oct-16
Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Selerence 20 dB Attenuator Type-N mismatch combination Reference Probe EX3DV4 DAE4 Secondary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A Reference Probe EX3DV4 Ref	SN: 103244 SN: 103245 SN: 5058 (204) SN: 5047.2 / 06327 SN: 7349 SN: 601 ID # SN: GB37480704 SN: US37292783 SN: MY41092317 SN: US37390585	06-Apr-16 (No. 217-02288) 06-Apr-16 (No. 217-02289) 06-Apr-16 (No. 217-02292) 06-Apr-16 (No. 217-02292) 06-Apr-16 (No. 217-02295) 31-Dec-15 (No. EX3-7349 Dec15) 30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house) 07-Oct-16 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 15-Jun-15 (in house check Jun-15) 18-Oct-01 (in house check Oct-15)	Apr-17 Apr-17 Apr-17 Apr-17 Dec-16 Dec-16 Dec-16 Scheduled Check In house check: Oct-16 In house check: Oct-16 In house check: Oct-16 In house check: Oct-16 Signature
Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Reference Probe EX3DV4 DAE4 Secondary Standards Power meter EPM-442A Power sensor HP 8481A RF generator R&S SMT-06	SN: 103244 SN: 103245 SN: 5047 (20k) SN: 5047 (2 / 06327 SN: 7349 SN: 501 ID ii SN: GB37480704 SN: US37292783 SN: MY41092317 SN: 100972 SN: US37390585 Name	06-Apr-16 (No. 217-02288) 06-Apr-16 (No. 217-02289) 06-Apr-16 (No. 217-02292) 06-Apr-16 (No. 217-02292) 06-Apr-16 (No. 217-02295) 31-Dec-15 (No. EX3-7349 Dec15) 30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house) 07-Oct-16 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 15-Jun-15 (in house check Jun-15) 18-Oct-01 (in house check Oct-15)	Apr-17 Apr-17 Apr-17 Apr-17 Dec-16 Dec-16 Scheduled Check In house check: Oct-16
Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Pelerence 20 dB Attenuator Type-N mismatch combination Reference Probe EX3DV4 DAE4 Secondary Standards Power meter EPM-442A Power sensor HP 8481A PF generator R&S SMT-D6 Network Analyzer HP 8753E Calibrated by:	SN: 103244 SN: 103245 SN: 6058 (20k) SN: 5047.2 / 06327 SN: 7349 SN: 601 ID # SN: GB37480704 SN: US37292783 SN: MY41092317 SN: 100972 SN: US37390585 Name Michael Weber	06-Apr-16 (No. 217-02288) 06-Apr-16 (No. 217-02289) 06-Apr-16 (No. 217-02292) 06-Apr-16 (No. 217-02292) 06-Apr-16 (No. 217-02295) 31-Dec-15 (No. EX3-7349 Dec15) 30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house) 07-Oct-16 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 15-Jun-15 (in house check Jun-15) 18-Oct-01 (in house check Oct-15)	Apr-17 Apr-17 Apr-17 Apr-17 Dec-16 Dec-16 Dec-16 Scheduled Check In house check: Oct-16 Signature
Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Reference Probe EX3DV4 DAE4 Secondary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A RF generator R&S SMT-06 Network Analyzer HP 8753E	SN: 103244 SN: 103245 SN: 5047 (20k) SN: 5047 (2 / 06327 SN: 7349 SN: 501 ID ii SN: GB37480704 SN: US37292783 SN: MY41092317 SN: 100972 SN: US37390585 Name	06-Apr-16 (No. 217-02288) 06-Apr-16 (No. 217-02289) 06-Apr-16 (No. 217-02292) 06-Apr-16 (No. 217-02292) 06-Apr-16 (No. 217-02295) 31-Dec-15 (No. EX3-7349 Dec15) 30-Dec-15 (No. DAE4-601 Dec15) Check Date (in house) 07-Oct-16 (No. 217-02222) 07-Oct-16 (No. 217-02223) 15-Jun-15 (in house check Jun-15) 18-Oct-01 (in house check Jun-15) Function Laboratory Technician	Apr-17 Apr-17 Apr-17 Apr-17 Dec-16 Dec-16 Dec-16 Scheduled Check In house check: Oct-16 In house check: Oct-16 In house check: Oct-16 In house check: Oct-16 Signature

Certificate No. D2450V2-727_Apr16

Page 1 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 187 of 216

Calibration Laboratory of

Schmid & Partner Engineering AG Zoughausstrasse 43, 8004 Zurich, Switzerland





C

Schweizerischer Kalibrierdienst Service suisse d'étalonnage

Servizio svizzero di taratura

Accreditation No.: SCS 0108

Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signaturies to the EA Muttilateral Agreement for the recognition of calibration certificates

Glossary:

TSL tissue simulating liquid ConvF sensitivity in TSL / NORM x,y,z

not applicable or not measured N/A

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless. Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D2450V2-727 Apr16

Page 2 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 188 of 216

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	<u> </u>

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.0 ± 6 %	1.83 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	12.8 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	51.0 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.93 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.7 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.7 ± 6 %	1.98 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.5 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	49.6 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.86 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.3 W/kg ± 16.5 % (k=2)

Certificate No: D2450V2-727_Apr16

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 189 of 216

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	55.3 Ω + 2.0 jΩ
Return Loss	- 25.4 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	52.1 Ω + 4.8 jΩ
Return Loss	- 25.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.148 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 09, 2003

Page 4 of 8 Certificate No: D2450V2-727_Apr16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

f (886-2) 2298-0488 www.tw.sas.com



Page: 190 of 216

DASY5 Validation Report for Head TSL

Date: 19.04.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 727

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz; $\sigma = 1.83 \text{ S/m}$; $\varepsilon_r = 40$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(7.76, 7.76, 7.76); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics; DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 112.1 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 25.7 W/kg SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.93 W/kg

SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.93 W/kg Maximum value of SAR (measured) = 20.8 W/kg



0 dB = 20.8 W/kg = 13.18 dBW/kg

Certificate No: D2450V2-727_Apr16

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 191 of 216

Impedance Measurement Plot for Head TSL

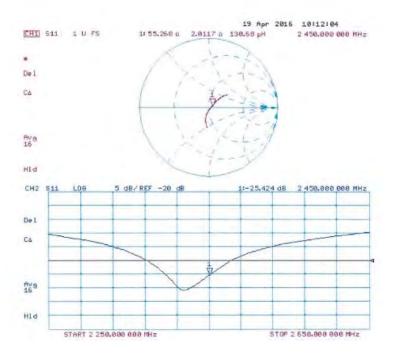

Certificate No: D2450V2-727_Apr16 Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 192 of 216

DASY5 Validation Report for Body TSL

Date: 19.04.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 727

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(7.79, 7.79, 7.79); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30,12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0;

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 105.0 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 24.9 W/kg SAR(1 g) = 12.5 W/kg; SAR(10 g) = 5.86 W/kgMaximum value of SAR (measured) = 20.2 W/kg



0 dB = 20.2 W/kg = 13.05 dBW/kg

Certificate No: D2450V2-727 Apr16

Page 7 of B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 193 of 216

Impedance Measurement Plot for Body TSL

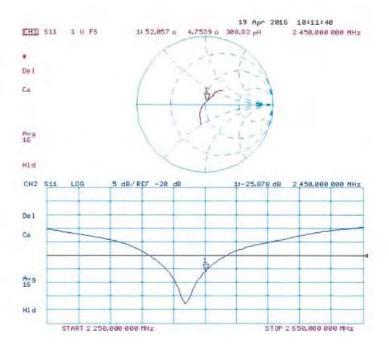

Certificate No: D2450V2-727 Apr16 Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 194 of 216

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kellbrierdlenst Service suisse d'étalonnage C Servizio svizzero di teratura Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

	CERTIFICATI		
Ottecr	D2600V2 - SN: 1	005	
Calibration (moedure(s)	QA CAL-05.v9 Calibration proce	edure for dipole validation kits at	pove 700 MHz
Continue date.	January 21, 2016	3	
This calibration perificate docum The measurements and the unco	ents the traceability to nat mainties with confidence p	ional standards, which metice the physical probability are given on the following pages a	units of measurements (Si); and are part of the certificate:
		ry facility: environment temperature (22 ± 3)	
	TE critical for calibration)		
poses and a charles of a see they	a constant of the control of		
Primary Standards	ID.4	Cal Date (Certificate No.)	Scheduled Calibration
Primary Standards Power meter EPM-442A	ID 4 GB37480704	07-Oct-15 (No. 217-02222)	Oct-16
Primary Standards Power meter EPM-442A Power sensor HP 9481A	ID A GB37480704 US37292783	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222)	Oct-16 Oct-16
Primary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A	ID A GB37480704 US37392783 MY41082317	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223)	Oct-16 Oct-16 Oct-16
Primary Standards: Power meter EPM-442A Power sensor HP 9481A Power sensor HP 9481A Reference 20 dB Attenuator	ID.A GB37480704 US37292783 MY41082317 SN: 5058 (204)	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 01-Apr-15 (No. 217-02131)	Oct-16 Oct-16 Oct-16 Mar-16
Primary Standards Power meter EPM-442A Power sensor HP 8481 A Power sensor HP 8481 A Petersnoc 20 dB Attenuator Type N mismatch combination	ID # GB37480704 US37292783 MY41082317 SN: 5068 (20h) SN: 5047.2 / 06327	07-0ct-15 (No. 217-02222) 07-0ct-15 (No. 217-02222) 07-0ct-15 (No. 217-02223) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02134)	Oct-16 Oct-16 Oct-16 Mar-16 Mar-16
Primary Standards: Power meter EPM-442A Power sensor HP 9481A Power sensor HP 9481A Reference 20 dB Attenuator	ID.A GB37480704 US37292783 MY41082317 SN: 5058 (204)	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02134) 31-Dec-15 (No. EX3-7348_Dec15)	Oct-16 Oct-16 Oct-16 Mar-16 Mar-18 Dec-16
Primary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dB Attenuator ryppi-N mismatch combination Reference Probe EX3DV4 DAE4	ID 4 GB37480704 US37292783 MY41082317 SN: 5050 (204) SN: 5047-2 / 06327 SN: 7348 SN: 601	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02131) 31-Dec-15 (No. 217-02134) 31-Dec-15 (No. 217-02134) 30-Dec-15 (No. DAE+601, Dec15)	Oct-16 Oct-16 Oct-16 Mar-16 Mar-16 Dec-16 Dec-16
Primary Standards: Power meter EPM-442A Power sensor HP 9481A Power sensor HP 9481A Peterence 20 dB Attenuator Type-N mismatch combination Releisince Probe EX3DV4 DAE4 Becondary Standards	ID 4 GB37480704 US37292783 MY41082317 SN: 5058 (204) SN: 5047.2 / 06327 SN: 7348 SN: 601	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02131) 31-Dec-15 (No. EX3-7349_Occ15) 30-Dec-15 (No. DAE+601_Dec15) Check Date (in house)	Oct-16 Oct-15 Oct-15 Mar-16 Mar-16 Dec-16 Dec-16 Scheduled Creck
Primary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dB Attenuator ryppi-N mismatch combination Reference Probe EX3DV4 DAE4	ID 4 GB37480704 US37292783 MY41082317 SN: 5050 (204) SN: 5047-2 / 06327 SN: 7348 SN: 601	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02131) 31-Dec-15 (No. 217-02134) 31-Dec-15 (No. 217-02134) 30-Dec-15 (No. DAE+601, Dec15)	Oct-16 Oct-16 Oct-16 Mar-16 Mar-16 Dec-16 Dec-16
Primary Standards Power meter EPM-442A Power sensor HP 8481 A Power sensor HP 8481 A Power sensor HP 8481 A Peterence 20 dB Attenuator Type-N mismatch combination Relationce Probe EX3DV4 DAE4 Secondary Standards R generator RAS SMT-06	ID # GB37480704 US37292763 MY41082317 SN: 5060 (204) SN: 5047-2 / 06327 SN: 7348 SN: 801	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Apr-15 (No. 217-02233) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02134) 31-Dec-15 (No. EX3-7349_Occ15) 30-Dec-15 (No. DA54-601_Dec15) Check Date (in house)	Oct-16 Oct-16 Oct-16 Mar-16 Mar-16 Dec-16 Dec-16 Dec-16 Scheduled Check In house check: Jun-18
Primary Standards Power meter EPM-442A Power sensor HP 8481 A Power sensor HP 8481 A Power sensor HP 8481 A Peterence 20 dB Attenuator Type-N mismatch combination Relationce Probe EX3DV4 DAE4 Secondary Standards R generator RAS SMT-06	ID 4 GB37480704 US37292783 MY41082317 SN: 5050 (204) SN: 5047-2 / 06327 SN: 7349 SN: 601 ID # 100972 US37390585 54208	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02131) 31-Dec-15 (No. 217-02131) 31-Dec-15 (No. 217-02131) 31-Dec-15 (No. 217-02131) 30-Dec-15 (No. EX3-7349_Dec15) 30-Dec-15 (No. DAE+-801_Dec15) Check Date (in house) 15-Jun-15 (in house check Jun-15) 18-Oct-01 (in house check Oct-16)	Oct-16 Oct-15 Oct-15 Mai-16 Mai-16 Dec-16 Dec-16 Scheduled Opece In house check: Jun-18 In house check: Oct-16
Primary Standards Power meter EPM-442A Power sensor HP 9481A Power sensor HP 9481A Peterence 20 dB Attenuator type-N mannatch combination fielletences Probe EX3DV4 DAE4 Becondary Standards IF generator R&S SMT-06 (ethyook Analyzor HP 8753E	ID 4 GB37480704 US37292783 MY41082317 SN: 5058 (204) SN: 5047.2 / 06327 SN: 7349 SN: 601 ID # 100972 US37390585 54206 Name	07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02131) 01-Oct-15 (No. 217-02131) 01-Oct-15 (No. 217-02131) 01-Oct-15 (No. 217-02131) 01-Oct-15 (No. EX3-7349_Oct-15) 01-Oct-15 (No. DAEA-001_Dec15) Check Date (in house) 15-Jun-15 (in house check Jun-15) 18-Oct-01 (in house check Oct-16)	Oct-16 Oct-16 Oct-16 Mar-16 Mar-16 Dec-16 Dec-16 Scheduled Opece In house check: Jun-18 In house check: Oct-16

Certificate No: D2600V2-1005_Jan16

Page 1 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 195 of 216

Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstrasse 45, 8004 Zurich, Switzerland





Schweizerincher Kallhrierdierral Service suisse d'Milliannage C Servizio evizzero di tersiona Swies Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swas Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibratice cartificales

Glossary:

TSL ConvF N/A

tissue simulating liquid

sensitivity in TSL / NORM x,y,z not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, 'Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30. MHz to 6 GHz)*, March 2010.
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%

Camilique No: D2600Y2-1005 Jan 16

Page 2 of B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 196 of 216

Measurement Conditions

as far as not given on pege 1

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2600 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.0	1.96 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	37.3 ± 6 %	2.04 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	***	

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	14.2 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	55.2 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.29 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.7 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.5	2.16 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	51.6 ± 6 %	2.22 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

SAR result with Body TSL

SAR averaged over 1 cm3 (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.7 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	53.9 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.10 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.2 W/kg ± 16.5 % (k=2)

Certificate No: D2600V2-1005_Jan16

Page 3 of B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 197 of 216

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.2 Ω - 4.2 jΩ
Return Loss	- 27.2 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	45.6 Ω - 3.3 <u>j</u> Ω
Return Loss	- 24.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.154 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	December 23, 2006

Certificate No: D2600V2-1005_Jan16

Page 4 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 198 of 216

DASY5 Validation Report for Head TSL

Date: 21.01.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1005

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used: f = 2600 MHz; $\sigma = 2.04 \text{ S/m}$; $s_r = 37.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

Probe: EX3DV4 - SN7349; ConvF(7.49, 7.49, 7.49); Calibrated: 31.12.2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn601; Calibrated: 30.12.2015


Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 114.8 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 30.2 W/kg SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.29 W/kg

Maximum value of SAR (measured) = 24.0 W/kg

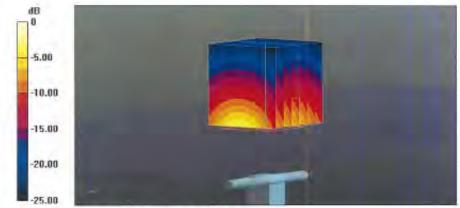

0 dB = 24.0 W/kg = 13.80 dBW/kg

Certificate No: D2600V2-1005 Jan16

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488


t (886-2) 2299-3279

SGS Taiwan Ltd.



Page: 199 of 216

Impedance Measurement Plot for Head TSL

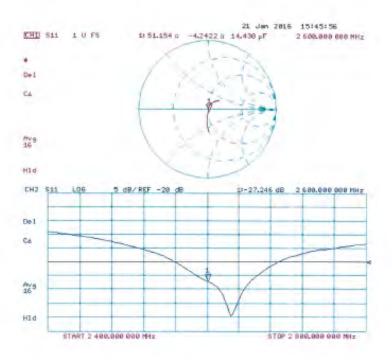

Certificate No: D2600V2-1005_Jan16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Page 6 of 8

SGS Taiwan Ltd.



Page: 200 of 216

DASY5 Validation Report for Body TSL

Date: 21.01.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1005

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used: f = 2600 MHz; $\sigma = 2.22 \text{ S/m}$; $\epsilon_r = 51.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(7.6, 7.6, 7.6); Calibrated: 31.12.2015;
- · Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8,8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 106.7 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 28.4 W/kg SAR(1 g) = 13.7 W/kg; SAR(10 g) = 6.1 W/kg Maximum value of SAR (measured) = 22.8 W/kg



0 dB = 22.8 W/kg = 13.58 dBW/kg

Certificate No: D2600V2-1005_Jan16

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_end_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be


prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 201 of 216

Impedance Measurement Plot for Body TSL

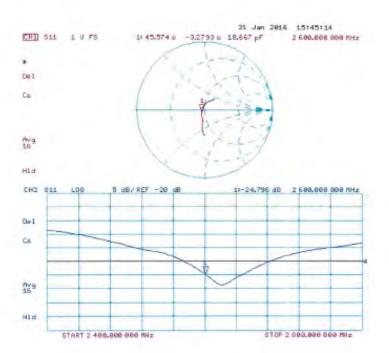

Certificate No: D2600V2-1005_Jan16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

Page 8 of 8

SGS Taiwan Ltd.



Page: 202 of 216

Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerlscher Kallbrierdienst Service ausse d'étalonnage Servizio evizzero di taratura Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

SGS-TW (Auden)

Accreditation No.: SCS 0108

Certificate No. D5GHzV2-1023 Jan 16

CALIBRATION CERTIFICATE D5GHzV2 - SN: 1023 Chiech QA CAL-22.V2 Calibration procedure(s) Calibration procedure for dipole validation kits between 3-6 GHz Calibration date January 26, 2016 This colloration certificate documents the traceability to national standards, which realize the physical units of measurements (Si) The measurements, and the uncontainties with confidence probability are given on the following pages and are cart of the certificate, All collorations have been conducted in the closed laboratory facility: environment temperature (22 a 31°C and humidity < 70%, Calibration Equipment used (M&TE critical for calibration) DA Cai Date (Certificate No.) Scheduled Calibration Primary Standards GB37480704 Power meter EPM-442A 07-Oct 15 (No. 217-02222) Oct-16 US37292783 07-Oct-15 (No. 217-02222) Power sensor HP 8461A Oct-16 Power sonsor HP 8481A MY41092317 07-Oct-15 (No. 217-02223) Oct-16 Reference 20 dB Attenuator SN: 5055 (20k) 01-Apr-15 (No. 217-02131) Mar-16 Type-N mismatch combination SN: 5047.2 / 06327 01-Apr-15 (No. 217-02154) May-16 Reference Probe EX3DV4 SM 3503 31 Dec-15 (No. EX3-3533_Dec/15) Dec-18 DAE4 SN. 801 30-Dec-15 (No. DAE4-601_Dec15) Dec-16 Secondary Standards ID # Check Date (in house) Scheduled Check 15-Jun-15 (in house check Jun-15) RF generator R&S SMT-06 100972 In house check: Jun-18 HS37390585-\$4205 In house check: Oct-16 Nelwork Analyzar HP 8753E 18-Oct-01 (in house check Oct-15) Name **Function** Calibrated by Michael Weber Liaboratory Technician Kata Poković Technical Manager Approved by This calibration cartificate shall not be reproduced except in full without written approval of the incoratory

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

Certificate No: 05GHzV2-1023 Jan 16

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Page 1 of 15



Page: 203 of 216

Calibration Laboratory of Schmid & Partner

Engineering AG
Zeugneusstrakke fd. 80M Zurich, Smitzerland.





S Schweizenscher Kalibriertites
C Service suisse d'étalonnage
Servicie svitzere di terature
S Swine Californion Service

Accreditation No.: SCS 0108

According by the Swine According on Service (SAS)

The Swiss Accrementation Service is one of the signatories to the EA Multilatoral Agreement for the recognition of calibration certificates.

Glossary:

TSL tissue simulating liquid ConvF sensitivity in TSL / NOR

ConvF sensitivity in TSL, / NORM x,y,z. N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices; Measurement Techniques", June 2013
- EC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30, MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end
 of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed
 point exactly below the center marking of the flat phantom section, with the arms oriented
 parallel to the body axis.
- Fued Point Impedence and Return Loss: These parameters are measured with the dipole
 positioned under the liquid filled phantom. The Impedance stated is transformed from the
 measurement at the SMA connector to the feed point. The Return Loss ensures low
 reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point.
 No uncertainty required.
- . SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No. D5GHzV2-1023 Jan H

Page 2 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 204 of 216

Measurement Conditions

WST system configuration, as lar as not	given on page 1.	
DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, $dy = 4.0$ mm, $dz = 1.4$ mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz ± 1 MHz 5300 MHz ± 1 MHz 5600 MHz ± 1 MHz 5600 MHz ± 1 MHz	

Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 m/no/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.2 ± 6 %	4.51 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.74 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	77.0 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.23 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.1 W/kg ± 19.5 % (k=2)

Certificate No: D5GHzV2-1023_Jan16

Page 3 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 205 of 216

Head TSL parameters at 5300 MHz

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.1 ± 6 %	4.60 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL at 5300 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.03 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	79.9 W / kg ± 19.9 % (k=2)

SAR averaged over 10 cm3 (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.1 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5600 MHz

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.7 ± 6 %	4.90 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm3 (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.31 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	82.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	-
SAR measured	100 mW input power	2.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.6 W/kg ± 19.5 % (k=2)

Certificate No: D5GHzV2-1023_Jan16

Page 4 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 206 of 216

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

tie ioliowitig paratrictors artu calculations were appri	ou.		
	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.4 ± 6 %	5.10 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm ² (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.78 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	77.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ⁵ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.22 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.0 W/kg ± 19.5 % (k=2)

Certificate No: D5GHzV2-1023_Jan16

Page 5 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

documents, subject to Terms and Conductors for Electronic Documents at www.sgs.com/erins_e-occument.ntm. And this document is advised that information contained hereon reflects the Company's finings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 207 of 216

Body TSL parameters at 5200 MHz

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.1 ± 6 %	5.37 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm3 (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.25 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	71.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm3 (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.05 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.3 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.9 ± 6 %	5.50 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

SAR result with Body TSL at 5300 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.57 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm3 (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.14 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.2 W/kg ± 19.5 % (k=2)

Certificate No: D6GHzV2-1023_Jan16

Page 6 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 208 of 216

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.4 ± 6 %	5.91 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.89 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	78.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm² (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.23 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.1 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.0 ± 6 %	6.19 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm3 (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.59 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.13 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.1 W/kg ± 19.5 % (k=2)

Certificate No: D5GHzV2-1023 Jan16

Page 7 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 209 of 216

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	49.1 Ω - 8.4 jΩ
Return Loss	- 21.4 dB

Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to feed point	49.6 Ω · 4.2 jΩ
Return Loss	- 27.4 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	54.9 Ω - 1.4 jΩ
Return Loss	- 26.3 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	55.9 Ω + 2.2 jΩ
Return Loss	- 24.5 dB

Antenna Parameters with Body TSL at 5200 MHz

	Impedance, transformed to feed point	49.4 Ω - 6.8 jΩ
1	Return Loss	- 23.3 dB

Antenna Parameters with Body TSL at 5300 MHz

Impedance, transformed to feed point	50.9 Ω - 2.4 jΩ
Return Loss	- 31.8 dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	56.0 Ω - 0.1 jΩ
Return Loss	- 25.0 dB

Certificate No: D5GHzV2-1023_Jan16

Page 8 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 210 of 216

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	56.4 Ω + 2.4 jΩ
Return Loss	- 23.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.199 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	February 05, 2004

Certificate No: D5GHzV2-1023_Jan16 Page 9 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 211 of 216

DASY5 Validation Report for Head TSL

Date: 26.01.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1023

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5600

MHz, Frequency: 5800 MHz

Medium parameters used: f=5200 MHz; $\sigma=4.51$ S/m; $\epsilon_r=35.2$; $\rho=1000$ kg/m³, Medium parameters used: f=5300 MHz; $\sigma=4.6$ S/m; $\epsilon_r=35.1$; $\rho=1000$ kg/m³, Medium parameters used: f=5600 MHz; $\sigma=4.9$ S/m; $\epsilon_r=34.7$; $\rho=1000$ kg/m³, Medium parameters used: f=5800 MHz; $\sigma=5.1$ S/m; $\epsilon_r=34.4$; $\rho=1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN3503; ConvF(5.59, 5.59, 5.59); Calibrated: 31.12.2015, ConvF(5.25, 5.25, 5.25); Calibrated: 31.12.2015, ConvF(4.99, 4.99, 4.99); Calibrated: 31.12.2015, ConvF(4.95, 4.95, 4.95); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- · Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Scrial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 72.68 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 28.1 W/kg

SAR(1 g) = 7.74 W/kg; SAR(10 g) = 2.23 W/kgMaximum value of SAR (measured) = 17.8 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 73.14 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 30.0 W/kg

SAR(1 g) = 8.03 W/kg; SAR(10 g) = 2.33 W/kgMaximum value of SAR (measured) = 18.7 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 73.32 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 32.6 W/kg

SAR(1 g) = 8.31 W/kg; SAR(10 g) = 2.38 W/kgMaximum value of SAR (measured) = 19.8 W/kg

Certificate No: D5GHzV2-1023_Jan16

Page 10 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 212 of 216

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan,


dist=1.4mm (8x8x7)/Cube 0: Measurement grid; dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.15 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 32.0 W/kg

SAR(1 g) = 7.78 W/kg; SAR(10 g) = 2.22 W/kg

Maximum value of SAR (measured) = 18.8 W/kg

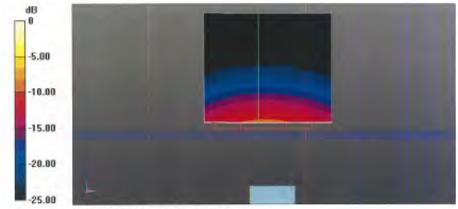

0 dB = 18.8 W/kg = 12.74 dBW/kg

Certificate No: D5GHzV2-1023_Jan16

Page 11 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 213 of 216

Impedance Measurement Plot for Head TSL

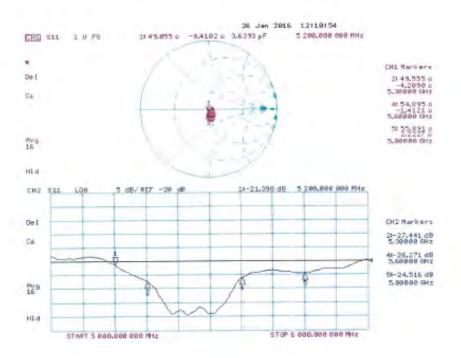

Certificate No: D6GHzV2-1023_Jan16

Page 12 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 214 of 216

DASY5 Validation Report for Body TSL

Date: 25.01.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1023

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5600

MHz, Frequency: 5800 MHz

Medium parameters used: f = 5200 MHz; $\sigma = 5.37 \text{ S/m}$; $\varepsilon_c = 47.1$; $\rho = 1000 \text{ kg/m}^3$, Medium parameters used: f = 5300 MHz; $\sigma = 5.5$ S/m; $\epsilon_r = 46.9$; $\rho = 1000$ kg/m³, Medium parameters used: f = 5600 MHz; $\sigma =$ 5.91 S/m; $\varepsilon_c = 46.4$; $\rho = 1000 \text{ kg/m}^3$, Medium parameters used: f = 5800 MHz; $\sigma = 6.19 \text{ S/m}$; $\varepsilon_c = 46$; $\rho = 5800 \text{ MHz}$; $\sigma = 6.19 \text{ S/m}$; $\varepsilon_c = 6.19$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN3503; ConvF(4.99, 4.99, 4.99); Calibrated: 31.12.2015, ConvF(4.75, 4.75, 4.75); Calibrated: 31.12.2015, ConvF(4.35, 4.35, 4.35); Calibrated: 31.12.2015, ConvF(4.27, 4.27, 4.27); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.72 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 27.1 W/kg

SAR(1 g) = 7.25 W/kg; SAR(10 g) = 2.05 W/kg

Maximum value of SAR (measured) = 16.8 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.43 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 29.1 W/kg

SAR(1 g) = 7.57 W/kg; SAR(10 g) = 2.14 W/kg

Maximum value of SAR (measured) = 17.7 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.67 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 32.6 W/kg

SAR(1 g) = 7.89 W/kg; SAR(10 g) = 2.23 W/kg

Maximum value of SAR (measured) = 19.1 W/kg

Certificate No: D6GHzV2-1023 Jan16

Page 13 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 215 of 216

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan,


dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.76 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 33.0 W/kg

SAR(1 g) = 7.59 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 18.5 W/kg

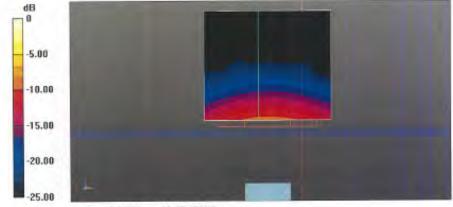

0 dB = 18.5 W/kg = 12.67 dBW/kg

Certificate No: D5GHzV2-1023_Jan16

Page 14 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 216 of 216

Impedance Measurement Plot for Body TSL

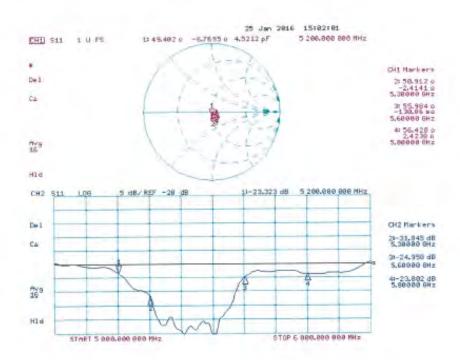

Certificate No: D5GHzV2-1023_Jan16

Page 15 of 15

- End of 1st part of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.