



FCC 47 CFR PART 15 SUBPART C

for

Tablet Computer

Model: A8002

Marketing Name: B3-A50FHD

Brand: acer

Test Report Number:

C180326Z01-RP1-3

Issued Date: April 26, 2018

Issued for

Acer Incorporated

8F, 88, Sec 1, Xintai 5th Rd. Xizhi, New Taipei City 221 Taiwan, R.O.C

Issued by:

Compliance Certification Services (Shenzhen) Inc.

No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd.,

Guan Lan Town, Baoan District, Shenzhen, China

TEL: 86-755-28055000

FAX: 86-755-28055221

E-Mail: service@ccssz.com



中国认可
国际互认
检测
TESTING
CNAS L4818



Certificate Number: 2861.01

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc. This document may be altered or revised by Compliance Certification Services (Shenzhen) Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	April 26, 2018	Initial Issue	ALL	Sinphy Xie



TABLE OF CONTENTS

1 TEST CERTIFICATION	4
2 TEST RESULT SUMMARY	5
3 EUT DESCRIPTION.....	6
4 TEST METHODOLOGY.....	8
4.1. DESCRIPTION OF TEST MODES	8
5 SETUP OF EQUIPMENT UNDER TEST	10
5.1. DESCRIPTION OF SUPPORT UNITS.....	10
5.2. CONFIGURATION OF SYSTEM UNDER TEST	10
6 FACILITIES AND ACCREDITATIONS	11
6.1. FACILITIES	11
6.2. ACCREDITATIONS	11
6.3. MEASUREMENT UNCERTAINTY.....	11
7 FCC PART 15.247 REQUIREMENTS	12
7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT.....	12
7.2. SPURIOUS EMISSIONS MEASUREMENT.....	19
7.3. 6dB BANDWIDTH MEASUREMENT	55
7.4. ANTENNA GAIN	63
7.5. PEAK OUTPUT POWER	64
7.6. BAND EDGES MEASUREMENT.....	66
7.7. PEAK POWER SPECTRAL DENSITY MEASUREMENT.....	84



1 TEST CERTIFICATION

Product	Tablet Computer
Model	A8002
Marketing Name	B3-A50FHD
Brand	acer
Tested	March 26~April 26, 2018
Applicant	Acer Incorporated 8F, 88, Sec 1, Xintai 5th Rd. Xizhi, New Taipei City 221 Taiwan, R.O.C
Manufacturer	Acer Incorporated 8F, 88, Sec 1, Xintai 5th Rd. Xizhi, New Taipei City 221 Taiwan, R.O.C

APPLICABLE STANDARDS

Standard	Test Type	Standard	Test Type
15.207(a)	Power Line Conducted Emissions	15.247(d) 15.209(a)	● Spurious Emissions ● Conducted Measurement ● Radiated Emissions
15.247(a)(2)	6dB Bandwidth Measurement	15.247(b)(3) 15.247(b)(4)	Peak Power Measurement
15.247(d)	Band Edges Measurement	15.247(e)	Peak Power Spectral Density

We hereby certify that:

The above equipment was tested by Compliance Certification Services (Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.10: 2013** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Eve Wang
Supervisor of EMC Dept.
Compliance Certification Services (Shenzhen) Inc.

Reviewed by:

Nancy Fu
Supervisor of Report Dept.
Compliance Certification Services (Shenzhen) Inc.



2 TEST RESULT SUMMARY

APPLICABLE STANDARDS			
Standard	Test Type	Result	Remark
15.247(a)(2)	6dB Bandwidth Measurement	Pass	Meet the requirement of limit.
15.247(b)(3) 15.247(b)(4)	Peak Power Measurement	Pass	Meet the requirement of limit.
15.247(d)	Band Edges Measurement	Pass	Meet the requirement of limit.
15.247(e)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.247(d) 15.209(a)	● Spurious Emissions ● Conducted Measurement ● Radiated Emissions	Pass	Meet the requirement of limit.
15.207(a)	Power line Conducted Emissions	Pass	Meet the requirement of limit.

Note: 1. The statements of test result on the above are decided by the request of test standard only; the measurement uncertainties are not factored into this compliance determination.
2. The information of measurement uncertainty is available upon the customer's request.



3 EUT DESCRIPTION

Product	Tablet Computer
Model Number	A8002
Marketing Name	B3-A50FHD
Brand	acer
Model Discrepancy	N/A
Identify Number	C180326Z01-RP1-3
Received Date	March 26, 2018
Power Supply	DC5.35V or DC5.2V supplied by the Adapter or DC3.7V supplied by the battery
Adapter Specification	Adapter 1: DELTA ELECTRONICS, INC. MODEL: ADP-10HW A INPUT: 100-240Vac 0.4A 50/60Hz OUTPUT: 5.35Vdc 2A Adapter 2: LITE-ON TECHNOLOGY (CHANGZHOU)CO., LTD. MODEL: PA-1100-25 INPUT: 100-240Vac 0.3A 50/60Hz OUTPUT: 5.2Vdc 2.0A
Rechargeable Li-ion Polymer Battery Pack Specification	Battery 1: TCL Hyperpower Batteries Inc. Model: PR-279594N(1ICP3/95/94-2) Rating: 3.7V Charge Limited Voltage: 4.2V Rated Capacity: 6000mAh Rated Power: 22.2Wh Battery 2: Huizhou Highpower Technology Co.,LTD Model: HPP279594AB(1ICP3/95/94-2) Rating: 3.7V Charge Limited Voltage: 4.2V Rated Capacity/ Rated Power: Nominal 6100mAh/22.57Wh Minimum 6000mAh/22.20Wh
USB-Micro USB cable	Cable 1: Baisitai Unshielded, 0.80m Cable 2: Haoxin Unshielded, 0.80m
Transmit Power	IEEE 802.11b mode: 18.35dBm IEEE 802.11g mode: 23.16dBm IEEE 802.11n HT20 MHz mode: 23.46Bm IEEE 802.11n HT40 MHz mode: 23.55Bm
Modulation Technique	IEEE 802.11b mode: DSSS(CCK,QPSK, BPSK) IEEE 802.11g mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT20 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT40 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM)



Transmit Data Rate	IEEE 802.11b: 11Mbps(CCK) with fall back rates of 5.5/2/1Mbps IEEE 802.11g: 54Mbps with fall back rates of 48/36/24/18/12/9 /6Mbps IEEE 802.11n HT20: 65Mbps with fall back rates of 65/58.5/52/ 39/26/19.5/13.6.5Mbps IEEE 802.11n HT40: 135Mbps with fall back rates of 135/121.5/108/ 81/54/40.5/27/13.5Mbps
Number of Channels	IEEE 802.11b mode: 11 Channels IEEE 802.11g mode: 11 Channels IEEE 802.11n HT20 MHz mode: 11 Channels IEEE 802.11n HT40 MHz mode: 7 Channels
Antenna Specification	FPC antenna with 1.24dBi gain (Max)
Channels Spacing	IEEE 802.11b/g ,802.11n HT20/HT40 : 5MHz
Temperature Range	0°C ~ +35°C
Hardware Version	A10H3_MB_V1.2
Software Version	Acer_AV000_B3-A50FHD_RV00RB00_WW_GEN1

Note: 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2. This submittal(s) (test report) is intended for FCC ID: HLZA8002 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



4 TEST METHODOLOGY

4.1. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Used the “EngineerMode”software to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Test Item	Test mode	Worse mode
All test modes are tested in the following test environments [WiFi worst(2.4G/5G) Link +BT Link +GPS/Glonass Link]		
Conducted Emission	Mode 1: Charge(Adapter 1+Cable 1+Battery 1)+Play Video (USB2.0)(AC120V/60Hz)	<input type="checkbox"/>
	Mode 2: Charge(Adapter 1+Cable 2+Battery 1)+Play Video (USB2.0) (AC120V/60Hz)	<input type="checkbox"/>
	Mode 3: Charge(Adapter 2+Cable 1+Battery 1)+Play Video(USB2.0)(AC120V/60Hz)	<input type="checkbox"/>
	Mode 4: Charge(Adapter 2+Cable 2+Battery 1)+Play Video(USB2.0)(AC120V/60Hz)	<input checked="" type="checkbox"/>
	Mode 5: Charge(Adapter 1+Cable 1+Battery 1)+ Record Video(TF Card) (AC120V/60Hz)	<input type="checkbox"/>
	Mode 6: Charge(Adapter 1+Cable 2+Battery 1)+ Record Video(TF Card) (AC120V/60Hz)	<input type="checkbox"/>
	Mode 7: Charge(Adapter 2+Cable 1+Battery 1)+Record Video (TF Card) (AC120V/60Hz)	<input type="checkbox"/>
	Mode 8: Charge(Adapter 2+Cable 2+Battery 1)+Record Video (TF Card) (AC120V/60Hz)	<input type="checkbox"/>
	Mode 9: Charge(Adapter 1+Cable 1+Battery 2)+Play Video(USB2.0) (AC120V/60Hz)	<input type="checkbox"/>
	Mode 10: Charge(Adapter 1+Cable 2+Battery 2)+Play Video(USB2.0) (AC120V/60Hz)	<input type="checkbox"/>
	Mode 11: Charge(Adapter 2+Cable 1+Battery 2)+Play Video(USB2.0)(AC120V/60Hz)	<input type="checkbox"/>
	Mode 12: Charge(Adapter 2+Cable 2+Battery 2)+Play Video(USB2.0)(AC120V/60Hz)	<input type="checkbox"/>
	Mode 13: Charge(Adapter 1+Cable 1+Battery 2)+Record Video(TF Card) (AC120V/60Hz)	<input type="checkbox"/>
	Mode 14: Charge(Adapter 1+Cable 2+Battery 2)+Record Video(TF Card) (AC120V/60Hz)	<input type="checkbox"/>
	Mode 15: Charge(Adapter 2+Cable 1+ Battery 2)+ Record Video (TF Card) (AC120V/60Hz)	<input type="checkbox"/>
	Mode 16: Charge(Adapter 2+Cable 2+ Battery 2)+ Record Video (TF Card) (AC120V/60Hz)	<input type="checkbox"/>
	Mode 17: Charge(Adapter 1+Cable 1+Battery 1)+Play Video (USB2.0)(AC240V/50Hz)	<input type="checkbox"/>
	Mode 18: Charge(Adapter 1+Cable 2+Battery 1)+Play Video (USB2.0) (AC240V/50Hz)	<input type="checkbox"/>
	Mode 19: Charge(Adapter 2+Cable 1+Battery 1)+Play Video(USB2.0)(AC240V/50Hz)	<input type="checkbox"/>
	Mode 20: Charge(Adapter 2+Cable 2+Battery 1)+Play Video(USB2.0)(AC240V/50Hz)	<input type="checkbox"/>
	Mode 21: Charge(Adapter 1+Cable 1+Battery 1)+ Record Video(TF Card)(AC240V/50Hz)	<input type="checkbox"/>
	Mode 22: Charge(Adapter 1+Cable 2+Battery 1)+ Record Video(TF Card)(AC240V/50Hz)	<input checked="" type="checkbox"/>
	Mode 23: Charge(Adapter 2+Cable 1+Battery 1)+Record Video (TF Card)(AC240V/50Hz)	<input type="checkbox"/>
	Mode 24: Charge(Adapter 2+Cable 2+Battery 1)+Record Video (TF Card)(AC240V/50Hz)	<input type="checkbox"/>
	Mode 25: Charge(Adapter 1+Cable 1+Battery 2)+Play Video(USB2.0) (AC240V/50Hz)	<input type="checkbox"/>



Conducted Emission	Mode 26: Charge(Adapter 1+Cable 2+Battery 2)+Play Video(USB2.0) (AC240V/50Hz)	<input type="checkbox"/>
	Mode 27: Charge(Adapter 2+Cable 1+Battery 2)+Play Video(USB2.0)(AC240V/50Hz)	<input type="checkbox"/>
	Mode 28: Charge(Adapter 2+Cable 2+Battery 2)+Play Video(USB2.0)(AC240V/50Hz)	<input type="checkbox"/>
	Mode 29: Charge(Adapter 1+Cable 1+Battery 2)+Record Video(TF Card)(AC240V/50Hz)	<input type="checkbox"/>
	Mode 30: Charge(Adapter 1+Cable 2+Battery 2)+Record Video(TF Card)(AC240V/50Hz)	<input type="checkbox"/>
	Mode 31: Charge(Adapter 2+Cable 1+ Battery 2)+ Record Video (TF Card)(AC240V/50Hz)	<input type="checkbox"/>
	Mode 32: Charge(Adapter 2+Cable 2+ Battery 2)+ Record Video (TF Card)(AC240V/50Hz)	<input type="checkbox"/>
	Radiated Emission	Mode 1: Continuously Transmitting <input checked="" type="checkbox"/>

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only, and power line conducted emission below 30MHz, which worst case was in normal link mode.

IEEE802.11b mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE802.11g mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT20 MHz mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

IEEE 802.11n HT40 MHz mode: Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.



5 SETUP OF EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	TF Card	MB-MP 16DA	N/A	N/A	SAMSUNG	N/A	N/A
2	Earphone	G-3	N/A	DoC	GSG	Unshielded 1.00m	N/A
3	Notebook	Thinkpad S2	SL10K92342	DoC	LENOVO	N/A	Unshielded 1.00m (AC cable) Shielded 1.80m (DC cable)

Note:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2. CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.



6 FACILITIES AND ACCREDITATIONS

6.1. FACILITIES

All measurement facilities used to collect the measurement data are located at
No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.10, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI (C-4815,R-4320,T-2317, G-10624)
Canada	INDUSTRY CANADA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccssz.com>

6.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



7 FCC PART 15.247 REQUIREMENTS

7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT

7.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

7.1.2. TEST INSTRUMENTS

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	01/27/2018	01/26/2019
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	01/27/2018	01/26/2019
LISN	EMCO	3825/2	8901-1459	01/27/2018	01/26/2019
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	01/29/2018	01/28/2019
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			


NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R = No Calibration Request.



7.1.3. TEST PROCEDURES (please refer to measurement standard)

- The EUT and Support equipment, if needed, was placed on a non-conducted table, which is 0.8m above the ground plane and 0.4m away from the conducted wall.
- The test equipment EUT installed received AC main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane. All support equipment power received from a second LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The frequency range from 150 kHz to 30 MHz was searched. The test data of the worst-case condition(s) was recorded. Emission levels under limit 20dB were not recorded.

7.1.4. TEST SETUP

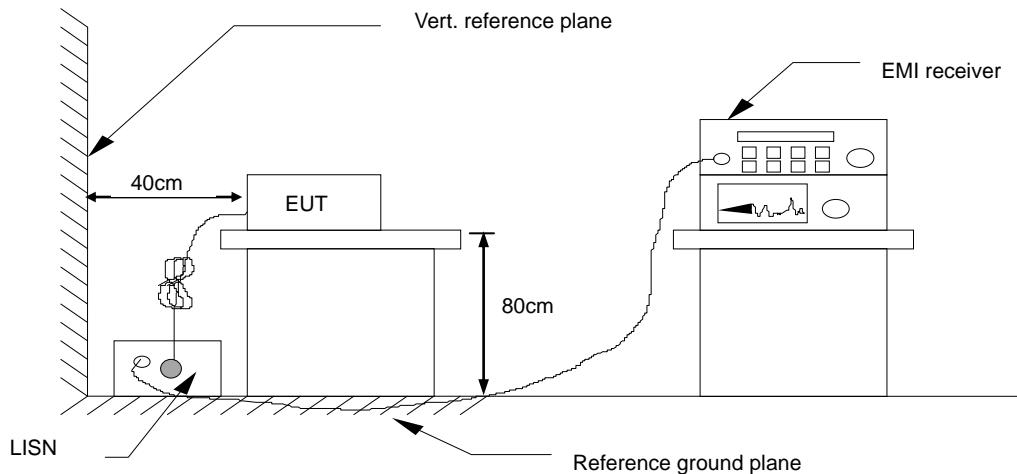

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.1.5. DATA SAMPLE

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XXXX	32.69	25.65	11.52	44.21	37.17	65.78	55.79	-21.57	-18.62	Pass

Factor = Insertion loss of LISN + Cable Loss

Result = Quasi-peak Reading/ Average Reading + Factor


Limit = Limit stated in standard

Margin = Result (dBuV) – Limit (dBuV)



7.1.6. TEST RESULTS

Model No.	A8002	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 4
Tested by	Eason Nie	Line	L1
Test Date	April 3, 2018	Test Voltage	AC 120V/60Hz

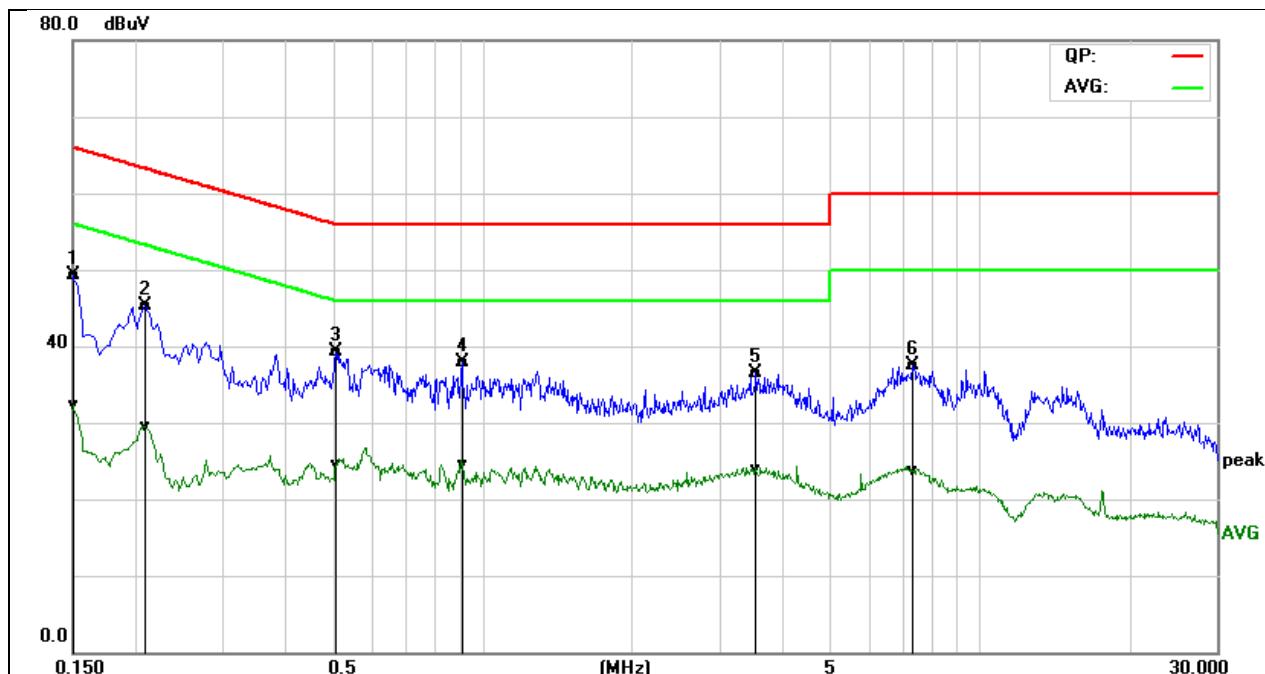


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1500	29.60	12.73	19.62	49.22	32.35	65.99	56.00	-16.77	-23.65	Pass
0.2100	25.63	9.81	19.64	45.27	29.45	63.20	53.21	-17.93	-23.76	Pass
0.5100	19.68	4.91	19.53	39.21	24.44	56.00	46.00	-16.79	-21.56	Pass
0.9100	18.27	4.94	19.57	37.84	24.51	56.00	46.00	-18.16	-21.49	Pass
3.5620	16.73	4.14	19.73	36.46	23.87	56.00	46.00	-19.54	-22.13	Pass
7.3580	17.59	3.79	19.87	37.46	23.66	60.00	50.00	-22.54	-26.34	Pass

REMARKS: L1 = Line One (Live Line)



Model No.	A8002	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 4
Tested by	Eason Nie	Line	L2
Test Date	April 3, 2018	Test Voltage	AC 120V/60Hz

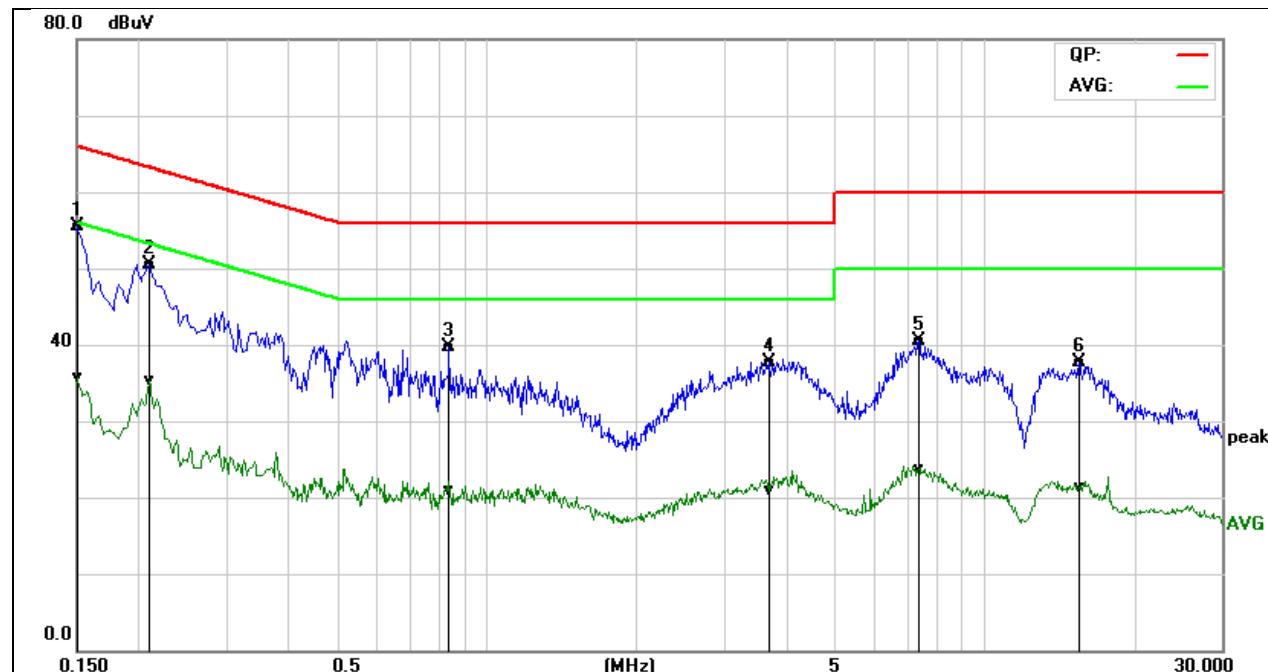


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1500	36.03	16.17	19.52	55.55	35.69	65.99	56.00	-10.44	-20.31	Pass
0.2100	31.04	15.76	19.54	50.58	35.30	63.20	53.21	-12.62	-17.91	Pass
0.8420	20.17	1.41	19.58	39.75	20.99	56.00	46.00	-16.25	-25.01	Pass
3.6980	17.99	1.04	19.79	37.78	20.83	56.00	46.00	-18.22	-25.17	Pass
7.4020	20.57	3.89	19.87	40.44	23.76	60.00	50.00	-19.56	-26.24	Pass
15.4900	17.60	1.33	20.03	37.63	21.36	60.00	50.00	-22.37	-28.64	Pass

REMARKS: L2 = Line Two (Neutral Line)



Model No.	A8002	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 22
Tested by	Eason Nie	Line	L1
Test Date	April 3, 2018	Test Voltage	AC 240V/50Hz

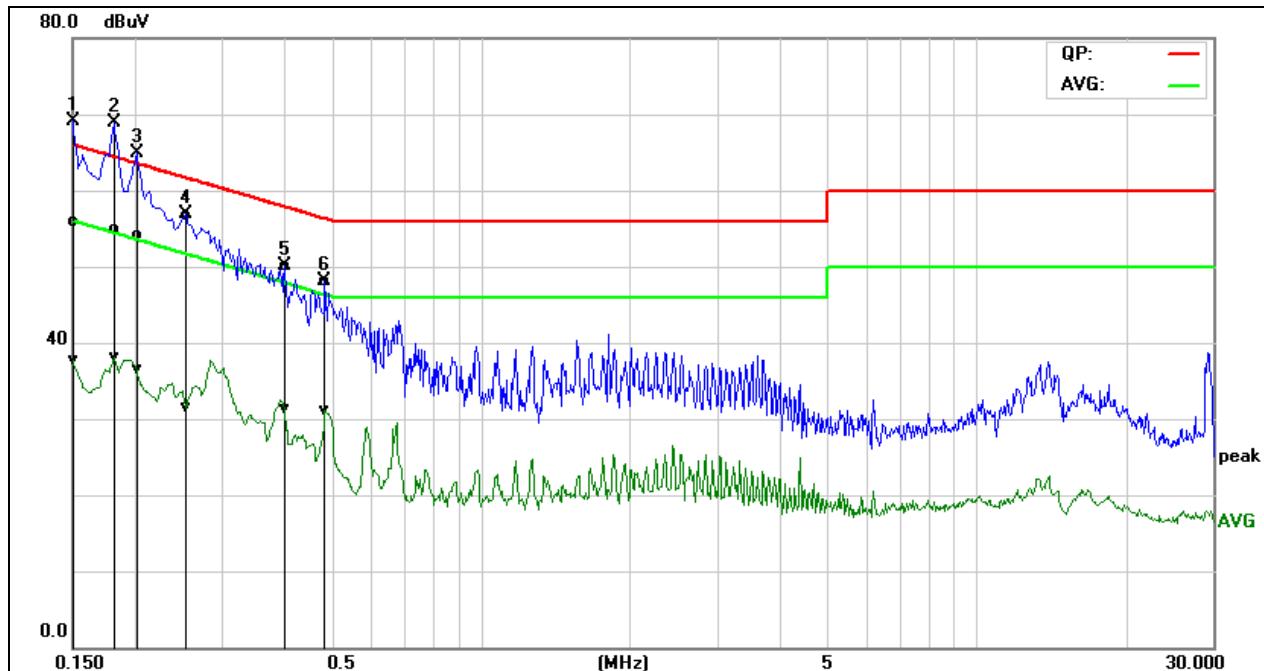


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1500	36.28	18.12	19.62	55.90	37.74	65.99	56.00	-10.09	-18.26	Pass
0.1819	35.27	18.48	19.63	54.90	38.11	64.39	54.40	-9.49	-16.29	Pass
0.2020	34.46	16.79	19.64	54.10	36.43	63.52	53.53	-9.42	-17.10	Pass
0.2540	37.18	11.85	19.62	56.80	31.47	61.62	51.63	-4.82	-20.16	Pass
0.4020	30.54	11.83	19.56	50.10	31.39	57.81	47.81	-7.71	-16.42	Pass
0.4860	28.54	11.59	19.53	48.07	31.12	56.24	46.24	-8.17	-15.12	Pass

REMARKS: L1 = Line One (Live Line)



Model No.	A8002	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 22
Tested by	Eason Nie	Line	L2
Test Date	April 3, 2018	Test Voltage	AC 240V/50Hz

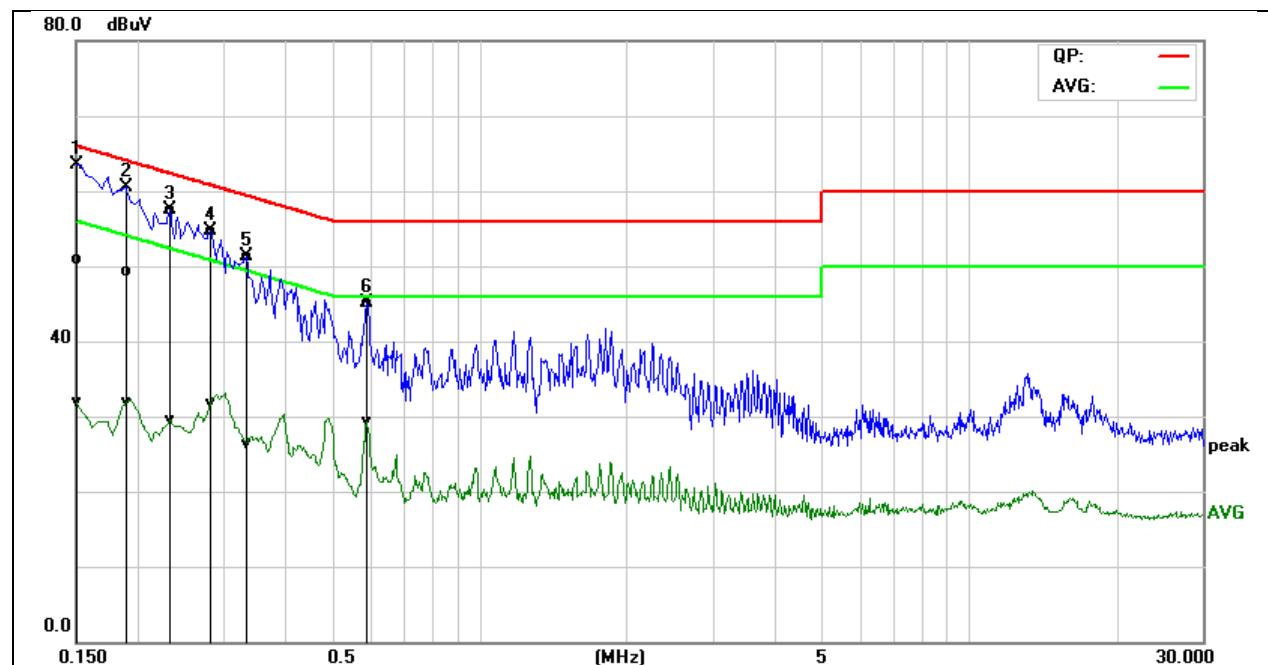

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1500	31.48	12.45	19.52	51.00	31.97	65.99	56.00	-14.99	-24.03	Pass
0.1900	29.76	12.33	19.54	49.30	31.87	64.03	54.04	-14.73	-22.17	Pass
0.2340	37.96	9.97	19.54	57.50	29.51	62.30	52.31	-4.80	-22.80	Pass
0.2819	35.26	12.22	19.54	54.80	31.76	60.76	50.76	-5.96	-19.00	Pass
0.3339	31.73	6.86	19.54	51.27	26.40	59.35	49.35	-8.08	-22.95	Pass
0.5899	25.59	9.70	19.57	45.16	29.27	56.00	46.00	-10.84	-16.73	Pass

REMARKS: L2 = Line Two (Neutral Line)



7.2. SPURIOUS EMISSIONS MEASUREMENT

7.2.1. CONDUCTED EMISSIONS MEASUREMENT

7.2.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

§15.247(d) specifies that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b) (3) requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

7.2.1.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	01/27/2018	01/26/2019

7.2.1.3. TEST PROCEDURE (please refer to measurement standard)

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site. The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 9 kHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels. No emission found between lowest internal used/generated frequency to 10MHz , it is only recorded 10MHz to 26GHz.




7.2.1.4. TEST RESULTS


Test Plot



IEEE 802.11b mode


CH Low (10MHz ~26.5GHz)


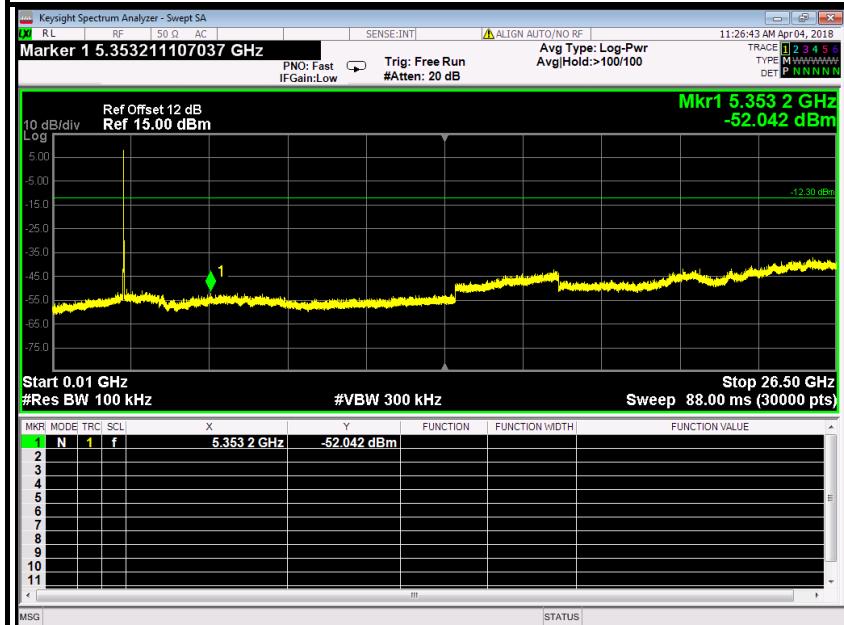




CH Low (2.31GHz ~2.43GHz)

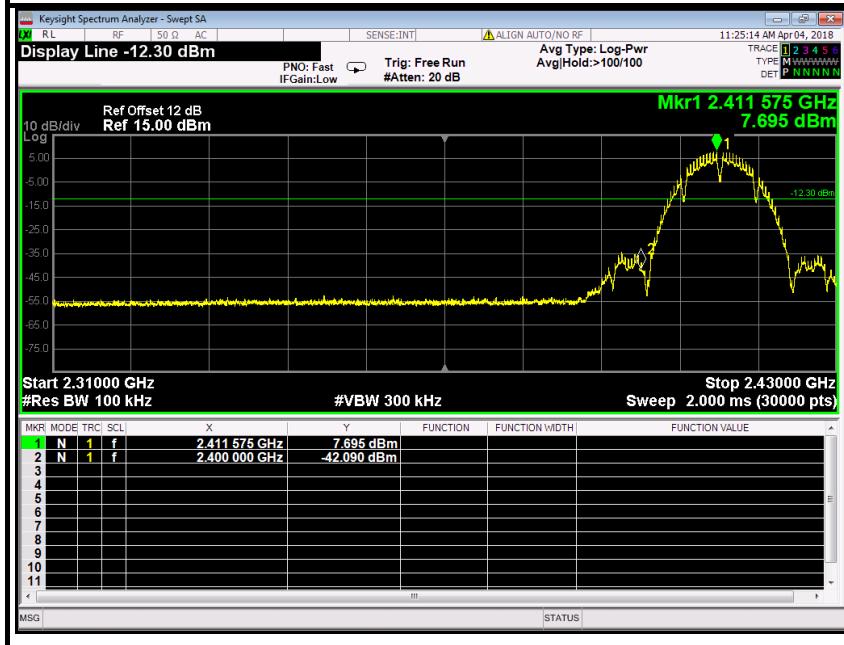


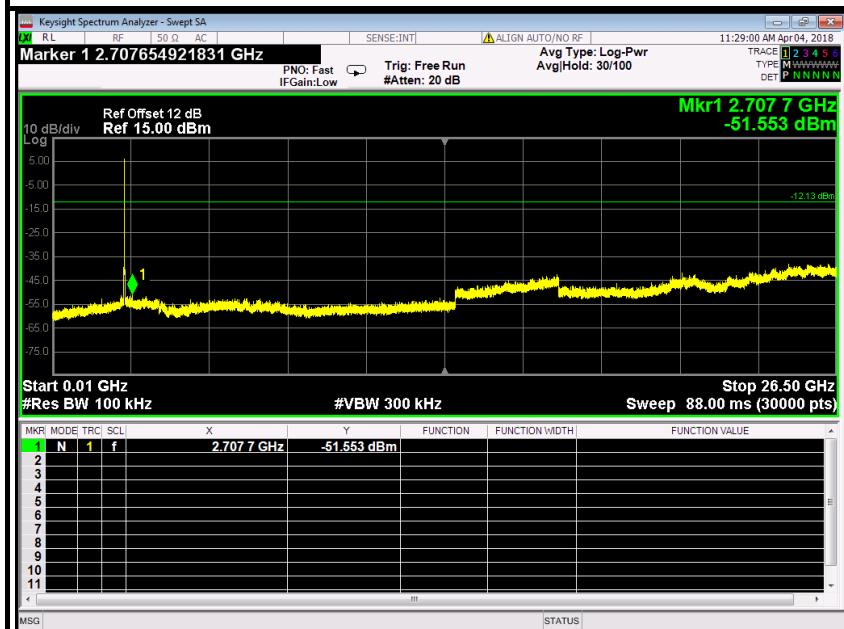
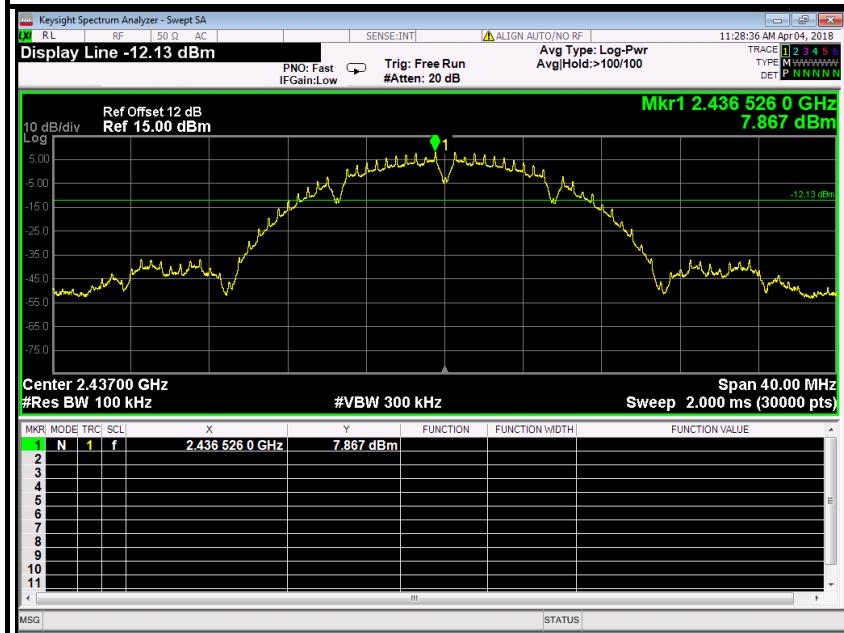
**CH Mid (10MHz ~26.5GHz)****CH Mid**


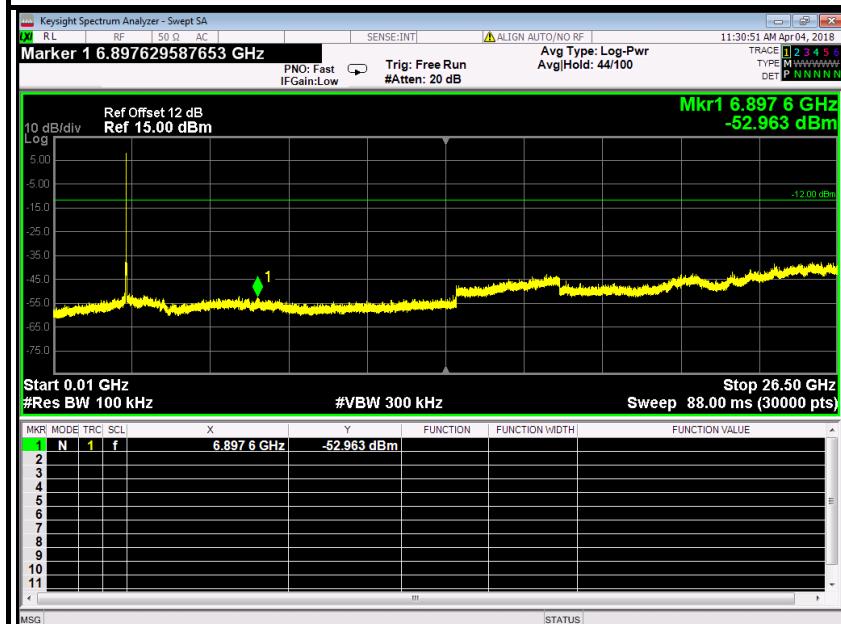
**CH High (10MHz ~26.5GHz)****CH High (2.45GHz ~2.5GHz)**

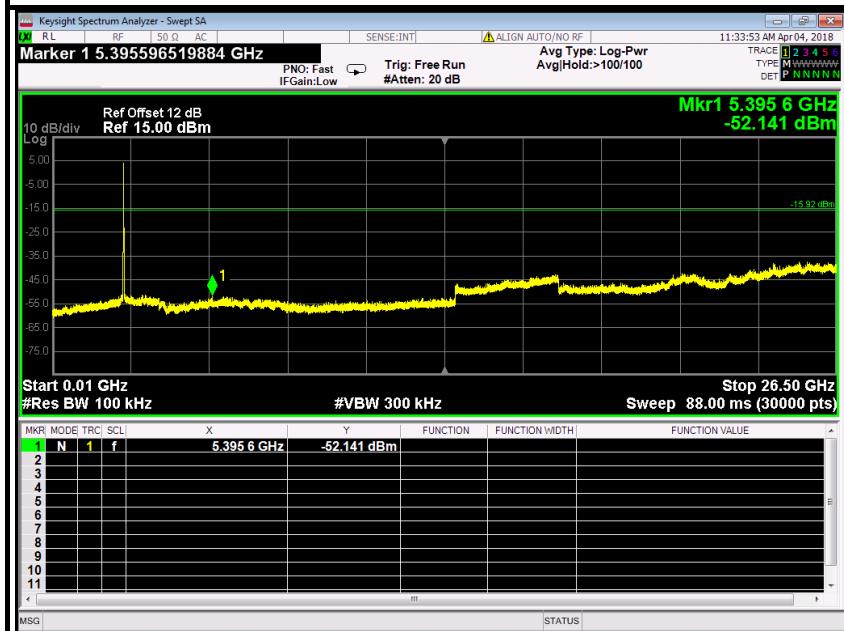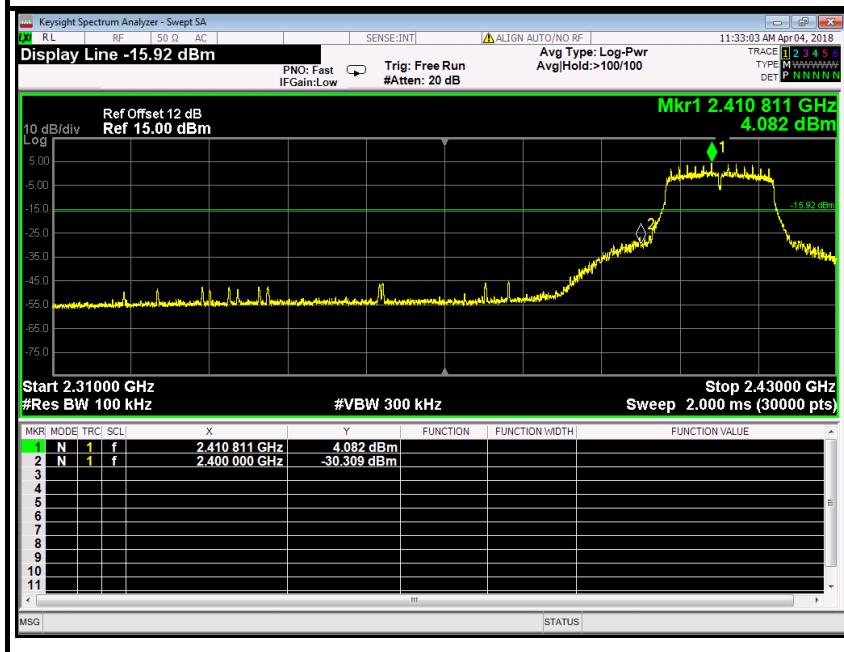
**IEEE 802.11q mode****CH Low (10MHz ~26.5GHz)****CH Low (2.31GHz ~2.43GHz)**

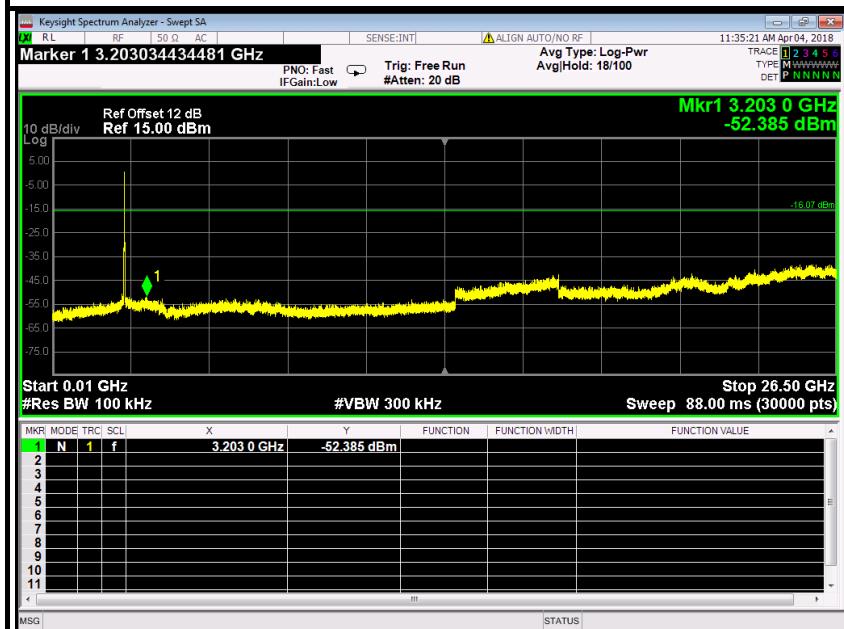
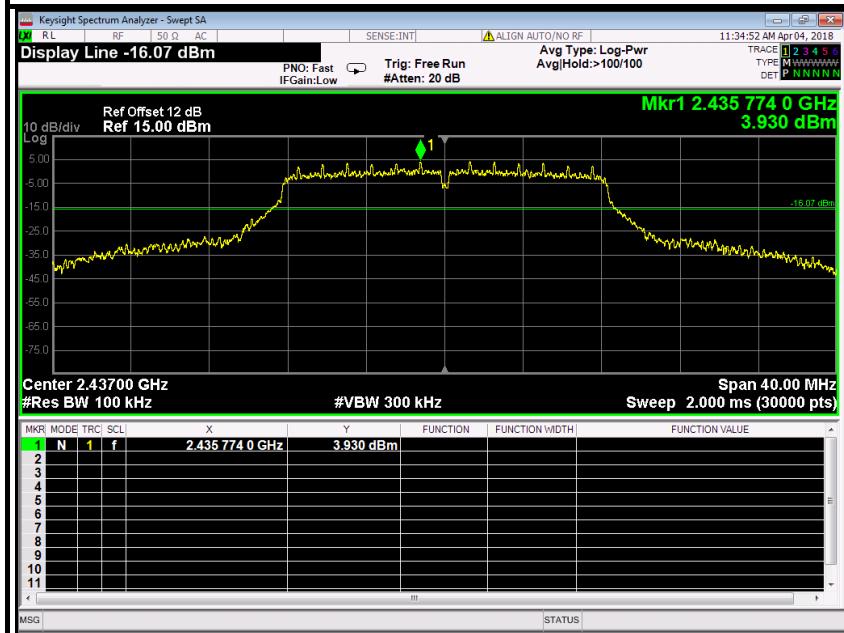
**CH Mid (10MHz ~26.5GHz)****CH Mid**


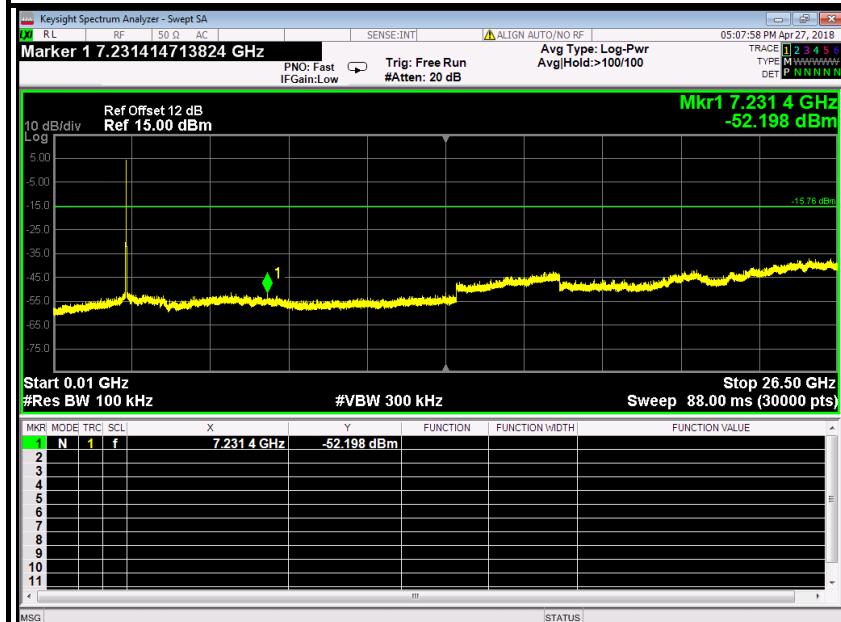
**CH High (10MHz ~26.5GHz)****CH High (2.45GHz ~2.5GHz)**

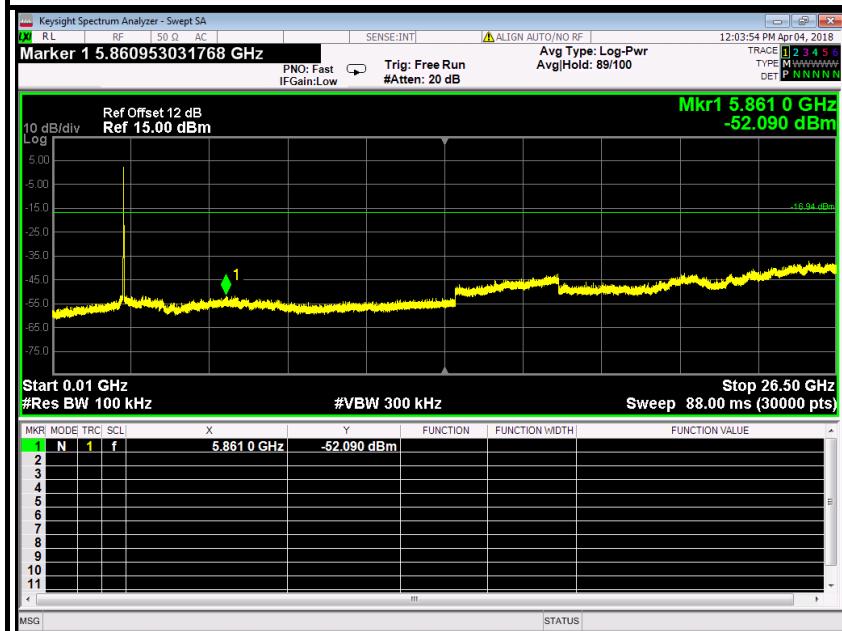
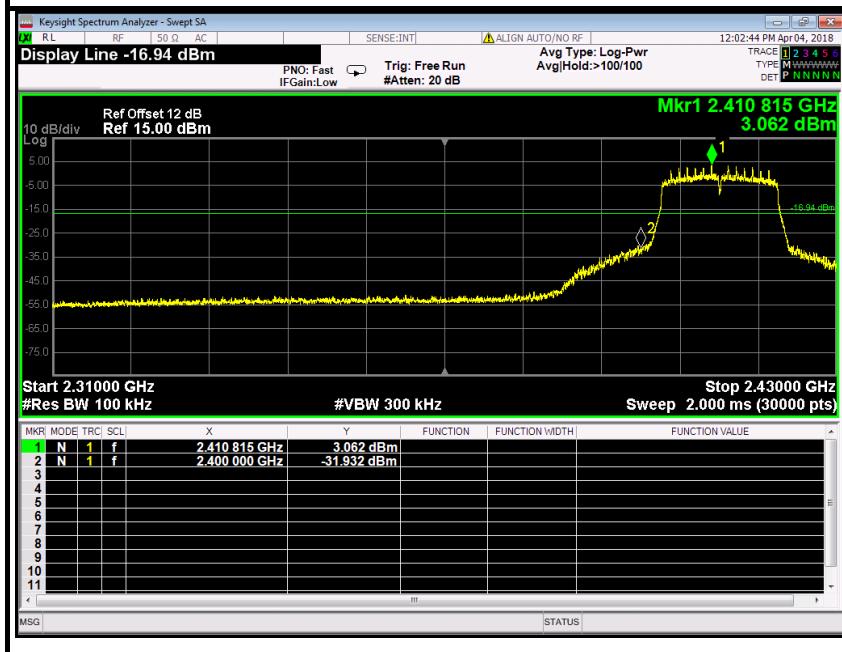
**IEEE 802.11n HT20 MHz mode****CH Low (10MHz ~26.5GHz)****CH Low (2.31GHz ~2.43GHz)**

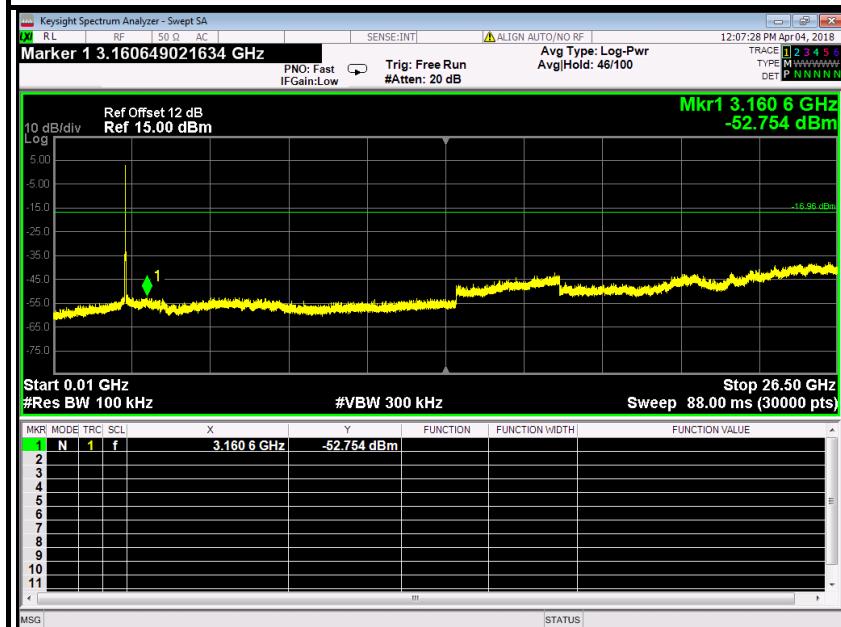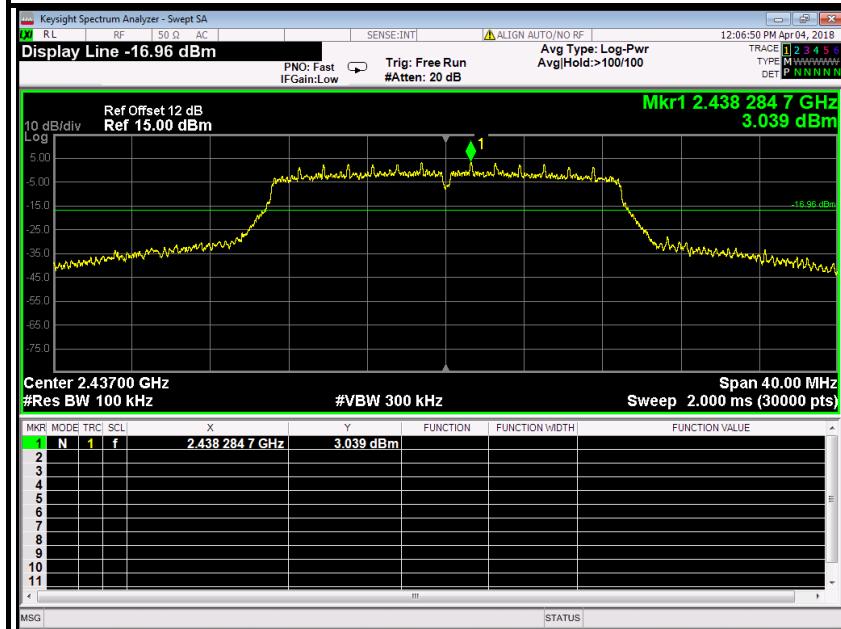**CH Mid (10MHz ~26.5GHz)****CH Mid**

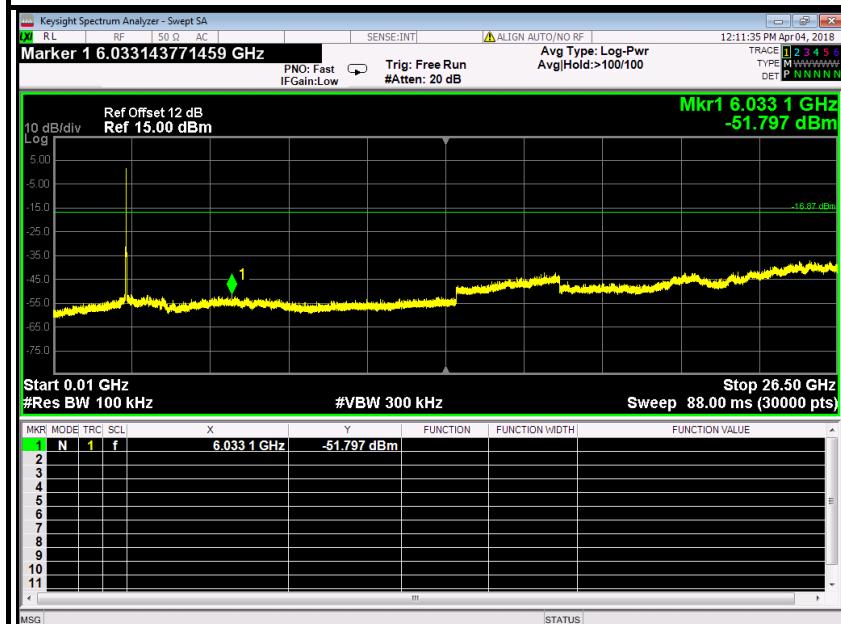**CH High (10MHz ~26.5GHz)****CH High (2.45GHz ~2.5GHz)**

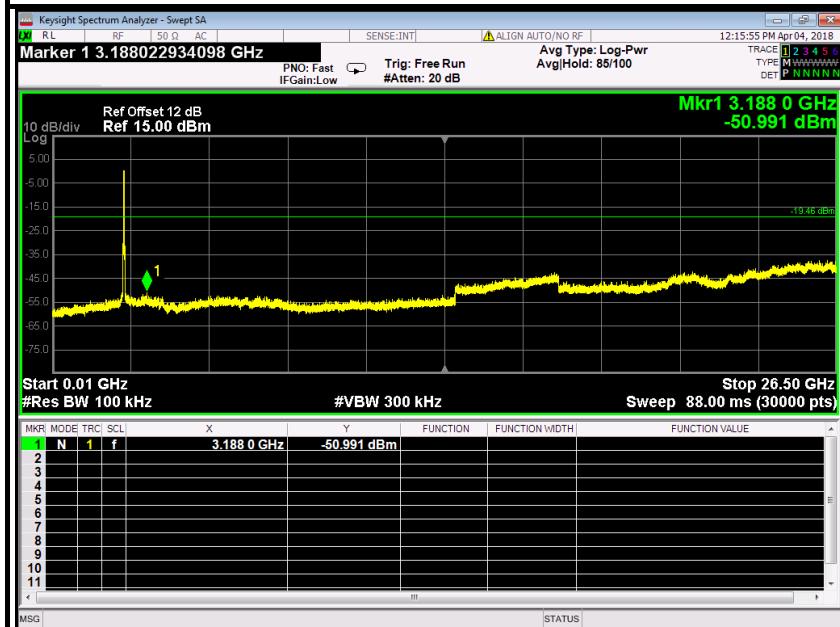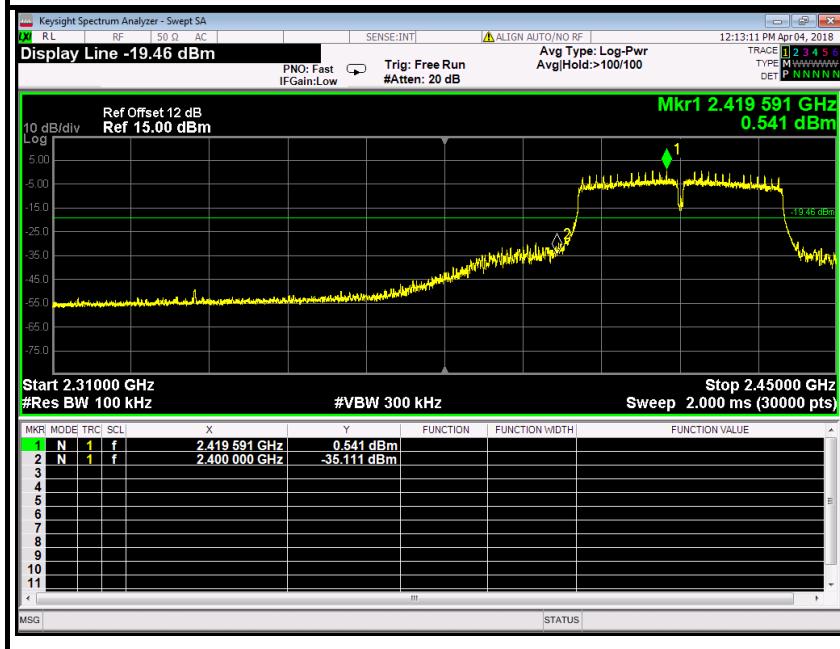**IEEE 802.11n HT40 MHz mode****CH Low (10MHz ~26.5GHz)****CH Low (2.31GHz ~2.45GHz)**

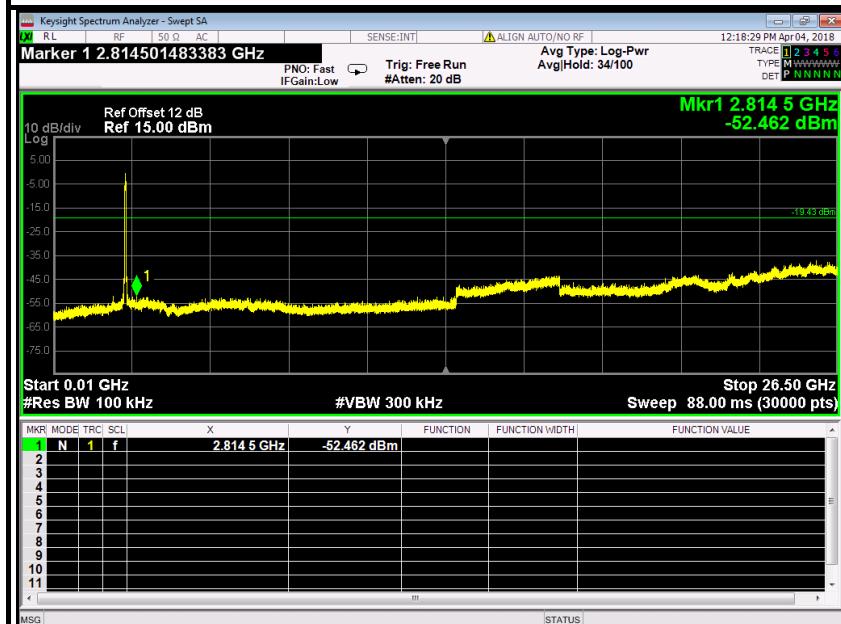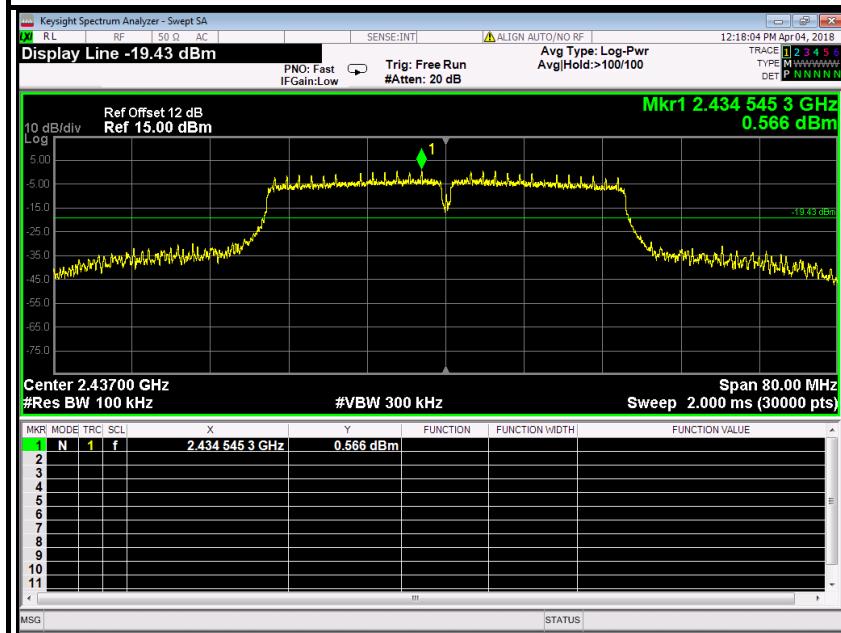**CH Mid (10MHz ~26.5GHz)****CH Mid**

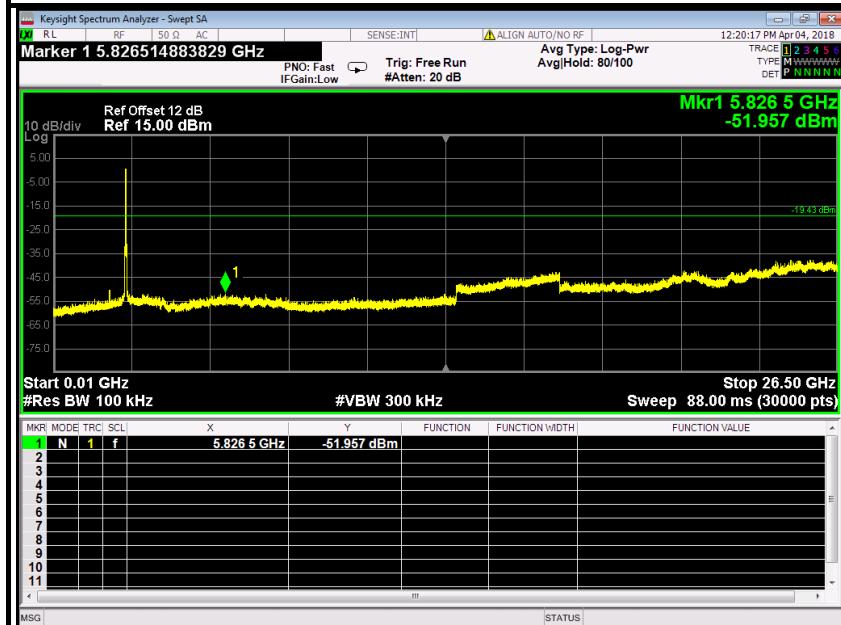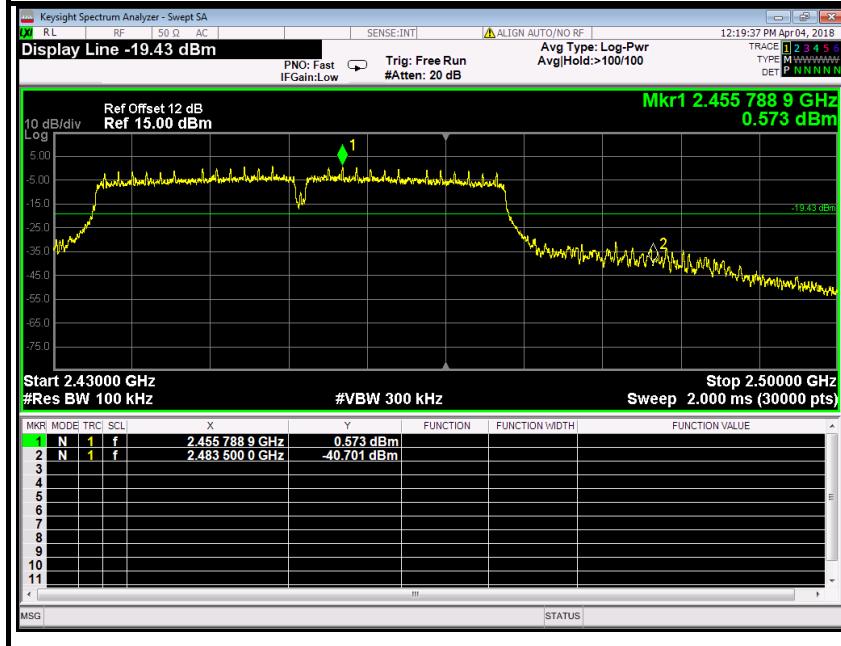**CH High (10MHz ~26.5GHz)****CH High (2.43GHz ~2.5GHz)**



7.2.2. RADIATED EMISSIONS MEASUREMENT

7.2.2.1. LIMITS OF RADIATED EMISSIONS MEASUREMENT

According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

1. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

NOTE:(1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dB μ V/m) = 20 log Emission level (μ V/m).



7.2.2.2. TEST INSTRUMENTS

Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	N9010A	MY52221469	01/27/2018	01/26/2019
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2018	02/20/2019
Amplifier	EMEC	EM330	060661	03/18/2018	03/17/2019
High Noise Amplifier	Agilent	8449B	3008A01838	02/21/2018	02/20/2019
Loop Antenna	COM-POWER	AL-130	121044	09/25/2017	09/24/2018
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2018	02/20/2019
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/27/2018	02/27/2019
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/27/2018	02/27/2019
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	01/29/2018	01/28/2019
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The FCC Site Registration number is 101879.

3. N.C.R = No Calibration Required.



7.2.2.3. Measuring Instruments and Setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/T for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

7.2.2.4. TEST PROCEDURE (please refer to measurement standard)

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions



Final measurement:

- Identified emissions during the pre measurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.



Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.



Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

Pre measurement:


- The antenna is moved spherical over the EUT in different polarisations of the antenna.

Final measurement:


- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.


7.2.2.5. TEST SETUP

Below 30MHz

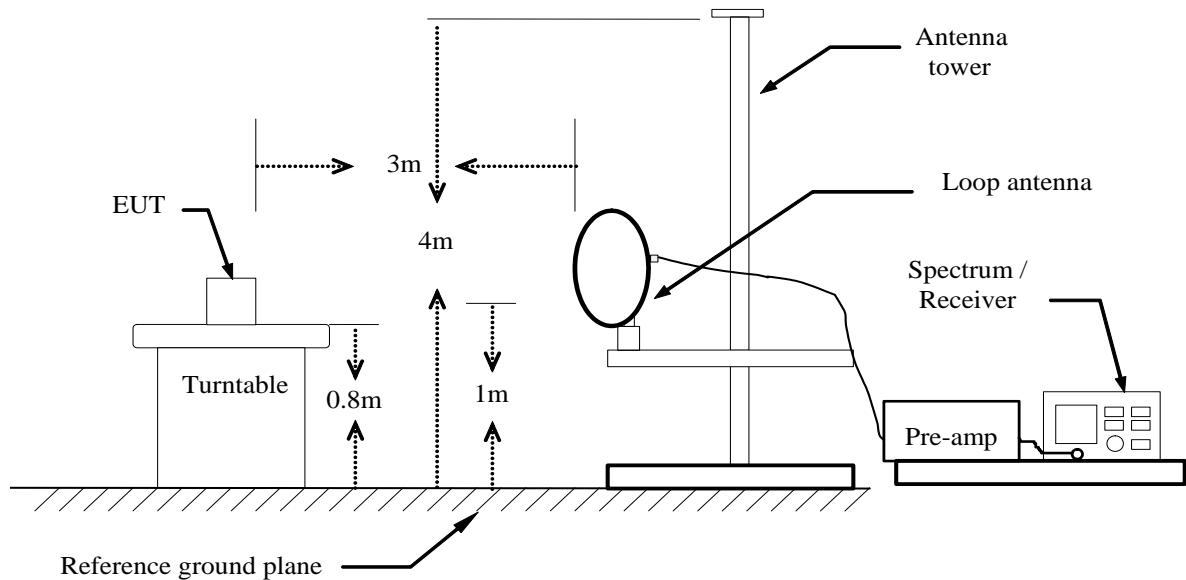

Below 1 GHz

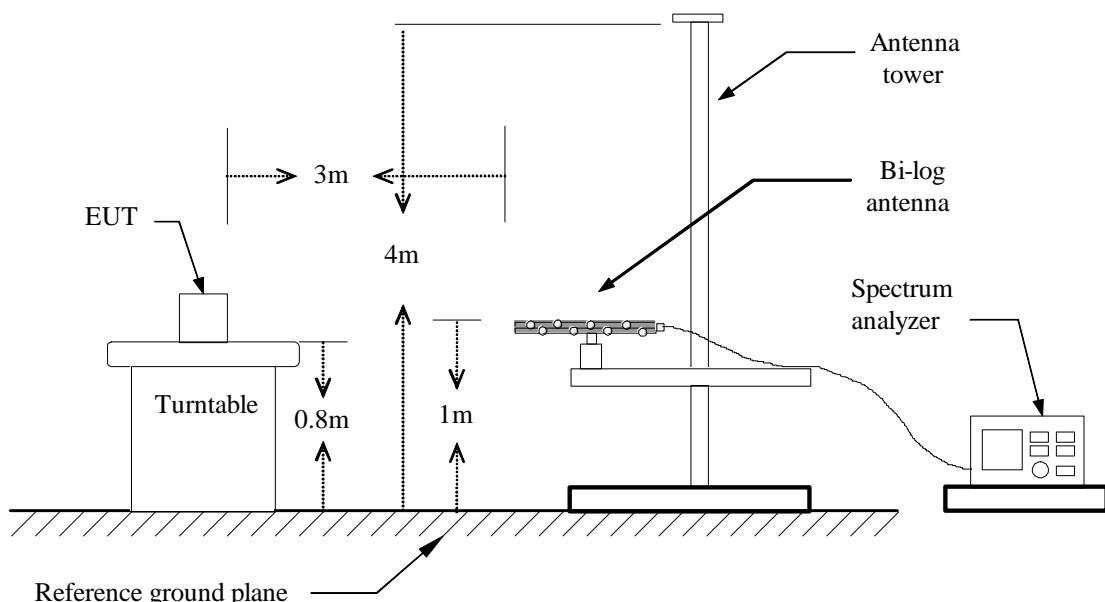

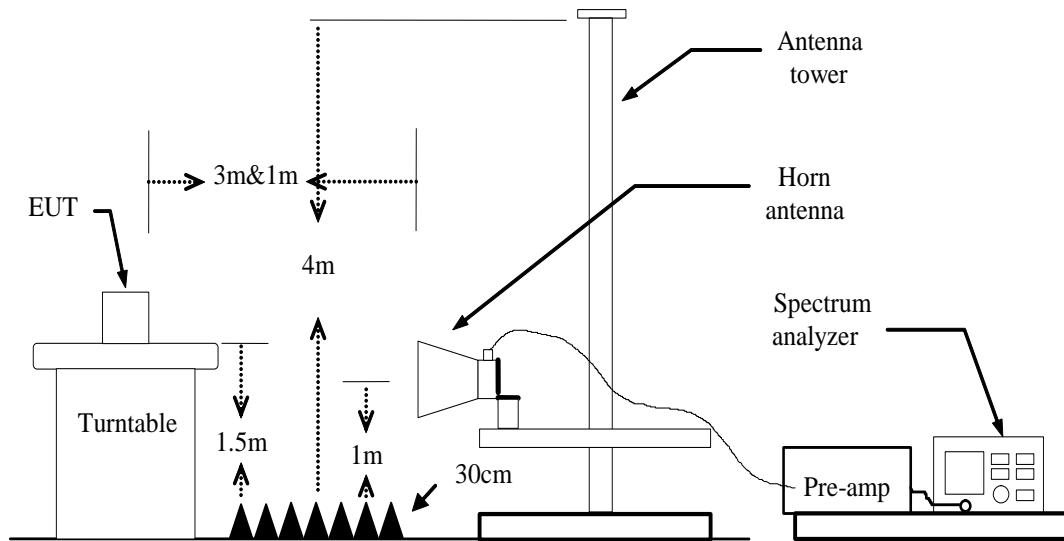Above 1 GHz

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



7.2.2.6. DATA SAMPLE

Below 1GHz

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXX.XXXX	36.37	-12.20	24.17	40.00	-15.83	V	QP

Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV) = Uncorrected Analyzer / Receiver reading
 Correct Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain
 Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)
 Q.P. = Quasi-peak Reading

Above 1GHz

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXXX.XXXX	62.09	-11.42	50.67	74.00	-23.33	V	Peak
XXXX.XXXX	49.78	-11.42	38.36	54.00	-15.64	V	AVG

Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV) = Uncorrected Analyzer / Receiver reading
 Correction Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain
 Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)
 Peak = Peak Reading
 AVG = Average Reading

Calculation Formula

$$\text{Margin (dB)} = \text{Result (dBuV/m)} - \text{Limits (dBuV/m)}$$

$$\text{Result (dBuV/m)} = \text{Reading (dBuV)} + \text{Correction Factor}$$



7.2.2.7. TEST RESULTS

Below 1 GHz

Test Mode: TX / IEEE 802.11b(CH Low)

Tested by: Saber Huang

Ambient temperature: 24°C Relative humidity: 52% RH

Date: April 11, 2018



Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
48.4300	56.73	-20.43	36.30	40.00	-3.70	V	QP
199.7500	44.38	-22.73	21.65	43.50	-21.85	V	QP
416.0600	40.81	-15.49	25.32	46.00	-20.68	V	QP
602.3000	28.15	-12.81	15.34	46.00	-30.66	V	QP
695.4200	28.49	-12.05	16.44	46.00	-29.56	V	QP
879.7200	34.47	-9.98	24.49	46.00	-21.51	V	QP
<hr/>							
127.0000	44.84	-20.87	23.97	43.50	-19.53	H	QP
190.0500	51.02	-22.86	28.16	43.50	-15.34	H	QP
320.0300	31.14	-18.93	12.21	46.00	-33.79	H	QP
416.0600	32.74	-15.49	17.25	46.00	-28.75	H	QP
529.5500	27.98	-13.90	14.08	46.00	-31.92	H	QP
642.0700	28.00	-12.48	15.52	46.00	-30.48	H	QP

Notes:

1. No emission found between lowest internal used/generated frequency to 30MHz.
2. Pre-scan all mode and recorded the worst case results in this report (802.11b (Low Channel)

Remark:

1. Radiated emissions measured in frequency range from 9 kHz to 1GHz were made with an instrument using Quasi-peak detector mode.
2. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. The IF bandwidth of Receiver between 30MHz to 1GHz was 120 kHz.
4. Frequency (MHz) = Emission frequency in MHz
Reading (dB μ V/m) = Receiver reading
Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
Limit (dB μ V/m) = Limit stated in standard
Margin (dB) = Measured (dB μ V/m) – Limits (dB μ V/m)
Antenna Pole (H/V) = Current carrying line of reading

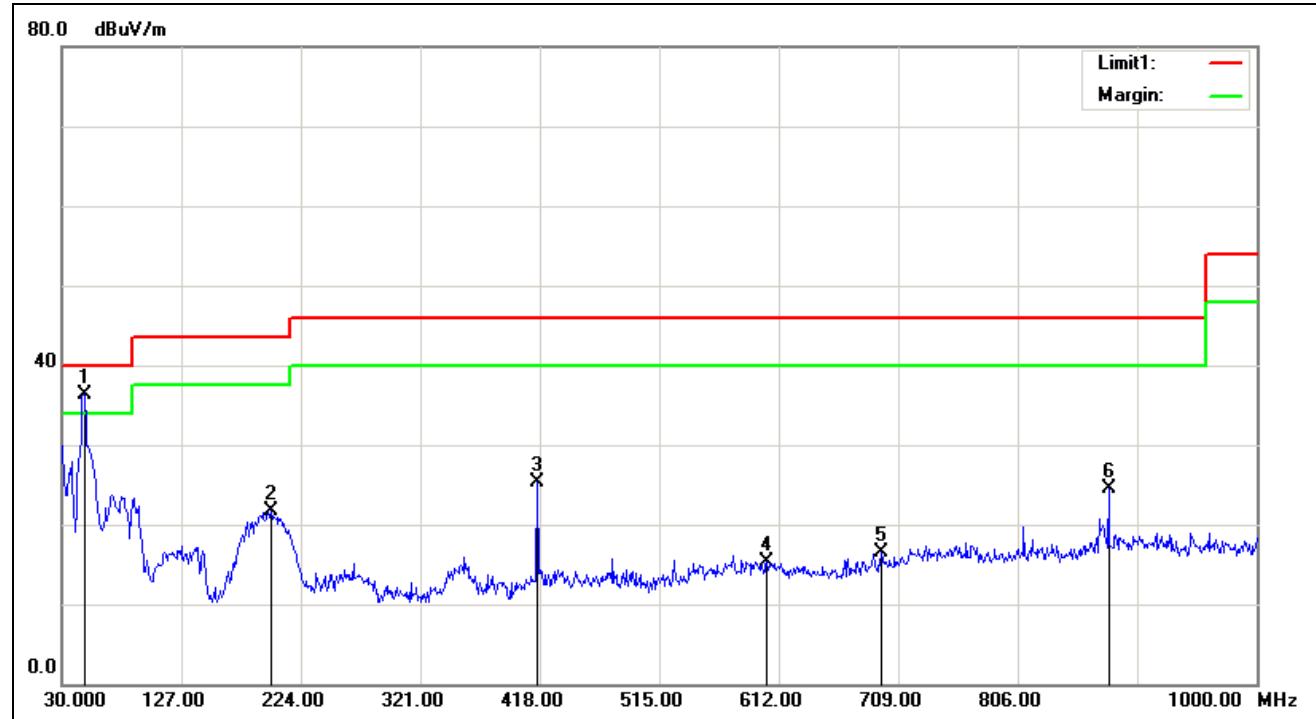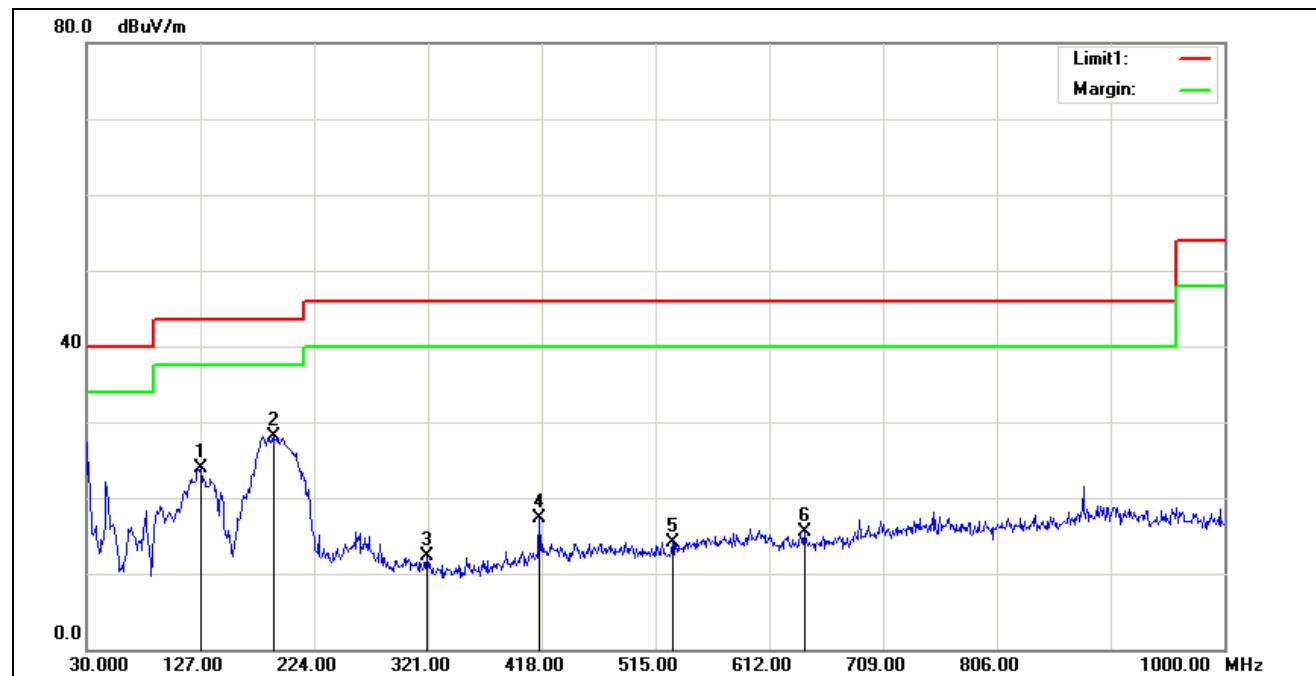**Vertical****Horizontal**

**Above 1 GHz****Test Mode: TX / IEEE 802.11b(CH Low)****Tested by: Saber Huang****Ambient temperature: 24°C****Relative humidity: 52% RH****Date: April 11, 2018**

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2062.000	45.93	-4.66	41.27	74.00	-32.73	V	peak
2674.000	45.99	-1.95	44.04	74.00	-29.96	V	peak
2899.000	44.33	-1.54	42.79	74.00	-31.21	V	peak
3646.000	42.72	0.10	42.82	74.00	-31.18	V	peak
3943.000	41.68	1.35	43.03	74.00	-30.97	V	peak
4762.000	41.70	4.20	45.90	74.00	-28.10	V	peak
1927.000	44.87	-5.46	39.41	74.00	-34.59	H	Peak
2251.000	45.37	-3.62	41.75	74.00	-32.25	H	Peak
2692.000	45.17	-1.91	43.26	74.00	-30.74	H	Peak
3169.000	50.98	-1.08	49.90	74.00	-24.10	H	Peak
4321.000	42.73	2.72	45.45	74.00	-28.55	H	peak
4762.000	44.67	4.20	48.87	74.00	-25.13	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11b (CH Mid)**Tested by:** Saber Huang**Ambient temperature:** 24°C **Relative humidity:** 52% RH**Date:** April 11, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2161.000	45.52	-4.12	41.40	74.00	-32.60	V	Peak
2701.000	45.19	-1.90	43.29	74.00	-30.71	V	Peak
2917.000	44.69	-1.51	43.18	74.00	-30.82	V	Peak
3385.000	44.39	-0.71	43.68	74.00	-30.32	V	Peak
3691.000	42.64	0.29	42.93	74.00	-31.07	V	Peak
4240.000	42.76	2.43	45.19	74.00	-28.81	V	Peak
<hr/>							
2215.000	45.52	-3.82	41.70	74.00	-32.30	H	Peak
3169.000	50.79	-1.08	49.71	74.00	-24.29	H	Peak
4042.000	42.46	1.74	44.20	74.00	-29.80	H	Peak
4762.000	44.99	4.20	49.19	74.00	-24.81	H	Peak
5554.000	43.55	5.89	49.44	74.00	-24.56	H	Peak
6346.000	44.82	6.64	51.46	74.00	-22.54	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11b (CH High)**Tested by:** Saber Huang**Ambient temperature:** 24°C**Relative humidity:** 52% RH**Date:** April 11, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2215.000	45.55	-3.82	41.73	74.00	-32.27	V	Peak
2845.000	44.50	-1.64	42.86	74.00	-31.14	V	Peak
3619.000	43.08	-0.02	43.06	74.00	-30.94	V	Peak
4168.000	41.91	2.18	44.09	74.00	-29.91	V	Peak
4735.000	41.44	4.12	45.56	74.00	-28.44	V	Peak
4969.000	41.67	4.88	46.55	74.00	-27.45	V	Peak
<hr/>							
2170.000	46.23	-4.07	42.16	74.00	-31.84	H	Peak
2665.000	45.22	-1.96	43.26	74.00	-30.74	H	Peak
2908.000	45.04	-1.53	43.51	74.00	-30.49	H	Peak
3169.000	49.78	-1.08	48.70	74.00	-25.30	H	Peak
3961.000	43.65	1.43	45.08	74.00	-28.92	H	Peak
4762.000	44.50	4.20	48.70	74.00	-25.30	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11g(CH Low)**Tested by:** Saber Huang**Ambient temperature:** 24°C**Relative humidity:** 52% RH**Date:** April 11, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1315.000	48.31	-7.37	40.94	74.00	-33.06	V	Peak
2242.000	45.83	-3.67	42.16	74.00	-31.84	V	Peak
2674.000	45.44	-1.95	43.49	74.00	-30.51	V	Peak
2935.000	44.32	-1.48	42.84	74.00	-31.16	V	Peak
3691.000	42.78	0.29	43.07	74.00	-30.93	V	Peak
4492.000	42.35	3.32	45.67	74.00	-28.33	V	Peak
<hr/>							
2080.000	47.10	-4.56	42.54	74.00	-31.46	H	Peak
2647.000	45.83	-2.00	43.83	74.00	-30.17	H	Peak
3169.000	49.73	-1.08	48.65	74.00	-25.35	H	Peak
4204.000	43.99	2.31	46.30	74.00	-27.70	H	Peak
4762.000	44.96	4.20	49.16	74.00	-24.84	H	Peak
5554.000	44.41	5.89	50.30	74.00	-23.70	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11g (CH Mid)**Tested by:** Saber Huang**Ambient temperature:** 24°C**Relative humidity:** 52% RH**Date:** April 11, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2080.000	45.80	-4.56	41.24	74.00	-32.76	V	Peak
2638.000	45.59	-2.01	43.58	74.00	-30.42	V	Peak
2908.000	44.19	-1.53	42.66	74.00	-31.34	V	Peak
3457.000	42.99	-0.59	42.40	74.00	-31.60	V	Peak
3610.000	42.81	-0.06	42.75	74.00	-31.25	V	Peak
4195.000	43.22	2.28	45.50	74.00	-28.50	V	Peak
<hr/>							
2197.000	46.45	-3.92	42.53	74.00	-31.47	H	Peak
2665.000	45.78	-1.96	43.82	74.00	-30.18	H	Peak
3169.000	51.06	-1.08	49.98	74.00	-24.02	H	Peak
4105.000	42.63	1.96	44.59	74.00	-29.41	H	Peak
4357.000	42.31	2.85	45.16	74.00	-28.84	H	Peak
4762.000	45.71	4.20	49.91	74.00	-24.09	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11g (CH High)**Tested by:** Saber Huang**Ambient temperature:** 24°C**Relative humidity:** 52% RH**Date:** April 11, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1360.000	48.52	-7.21	41.31	74.00	-32.69	V	Peak
2224.000	45.74	-3.77	41.97	74.00	-32.03	V	Peak
2890.000	45.08	-1.56	43.52	74.00	-30.48	V	Peak
3169.000	50.90	-1.08	49.82	74.00	-24.18	V	Peak
3637.000	44.22	0.06	44.28	74.00	-29.72	V	Peak
4762.000	45.27	4.20	49.47	74.00	-24.53	V	Peak
1360.000	48.52	-7.21	41.31	74.00	-32.69	H	Peak
2224.000	45.74	-3.77	41.97	74.00	-32.03	H	Peak
2890.000	45.08	-1.56	43.52	74.00	-30.48	H	Peak
3169.000	50.90	-1.08	49.82	74.00	-24.18	H	Peak
3637.000	44.22	0.06	44.28	74.00	-29.72	H	Peak
4762.000	45.27	4.20	49.47	74.00	-24.53	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11n HT20 MHz (CH Low)**Tested by:** Saber Huang**Ambient temperature:** 24°C **Relative humidity:** 52% RH**Date:** April 11, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1225.000	46.12	-7.70	38.42	74.00	-35.58	V	Peak
2251.000	45.83	-3.62	42.21	74.00	-31.79	V	Peak
2908.000	44.37	-1.53	42.84	74.00	-31.16	V	Peak
4222.000	42.77	2.37	45.14	74.00	-28.86	V	Peak
4762.000	43.79	4.20	47.99	74.00	-26.01	V	Peak
5014.000	42.41	5.00	47.41	74.00	-26.59	V	Peak
<hr/>							
1909.000	52.30	-5.58	46.72	74.00	-27.28	H	Peak
2206.000	46.67	-3.87	42.80	74.00	-31.20	H	Peak
2674.000	46.40	-1.95	44.45	74.00	-29.55	H	Peak
3169.000	51.81	-1.08	50.73	74.00	-23.27	H	Peak
3961.000	43.56	1.43	44.99	74.00	-29.01	H	Peak
4762.000	44.94	4.20	49.14	74.00	-24.86	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11n HT20 MHz (CH Mid)**Tested by:** Saber Huang**Ambient temperature:** 24°C**Relative humidity:** 52% RH**Date:** April 11, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2206.000	46.15	-3.87	42.28	74.00	-31.72	V	Peak
2665.000	45.88	-1.96	43.92	74.00	-30.08	V	Peak
3358.000	43.52	-0.76	42.76	74.00	-31.24	V	Peak
4177.000	43.23	2.21	45.44	74.00	-28.56	V	Peak
4402.000	42.56	3.01	45.57	74.00	-28.43	V	Peak
5059.000	43.13	5.09	48.22	74.00	-25.78	V	Peak
<hr/>							
2206.000	46.64	-3.87	42.77	74.00	-31.23	H	Peak
2206.000	46.64	-3.87	42.77	74.00	-31.23	H	Peak
3169.000	52.01	-1.08	50.93	74.00	-23.07	H	Peak
3961.000	42.76	1.43	44.19	74.00	-29.81	H	Peak
4762.000	45.43	4.20	49.63	74.00	-24.37	H	Peak
5149.000	42.67	5.25	47.92	74.00	-26.08	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / EEE 802.11n HT20 MHz (CH High)**Tested by:** Saber Huang**Ambient temperature:** 24°C**Relative humidity:** 52% RH**Date:** April 11, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1468.000	46.73	-6.94	39.79	74.00	-34.21	V	Peak
2242.000	45.29	-3.67	41.62	74.00	-32.38	V	Peak
2890.000	45.95	-1.56	44.39	74.00	-29.61	V	Peak
3169.000	46.04	-1.08	44.96	74.00	-29.04	V	Peak
3664.000	42.98	0.17	43.15	74.00	-30.85	V	Peak
4222.000	44.88	2.37	47.25	74.00	-26.75	V	Peak
<hr/>							
1450.000	47.48	-6.97	40.51	74.00	-33.49	H	Peak
1972.000	45.23	-5.18	40.05	74.00	-33.95	H	Peak
2188.000	45.62	-3.97	41.65	74.00	-32.35	H	Peak
3169.000	51.85	-1.08	50.77	74.00	-23.23	H	Peak
3646.000	43.32	0.10	43.42	74.00	-30.58	H	Peak
4762.000	45.35	4.20	49.55	74.00	-24.45	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11n HT40 MHz (CH Low)**Tested by:** Saber Huang**Ambient temperature:** 24°C**Relative humidity:** 52% RH**Date:** April 11, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2251.000	45.84	-3.62	42.22	74.00	-31.78	V	Peak
2647.000	44.73	-2.00	42.73	74.00	-31.27	V	Peak
2818.000	44.64	-1.69	42.95	74.00	-31.05	V	Peak
3763.000	43.16	0.59	43.75	74.00	-30.25	V	Peak
4429.000	42.90	3.10	46.00	74.00	-28.00	V	Peak
4960.000	41.97	4.85	46.82	74.00	-27.18	V	Peak
<hr/>							
1477.000	46.60	-6.92	39.68	74.00	-34.32	H	Peak
2089.000	46.03	-4.51	41.52	74.00	-32.48	H	Peak
2683.000	48.00	-1.93	46.07	74.00	-27.93	H	Peak
3169.000	51.76	-1.08	50.68	74.00	-23.32	H	Peak
4321.000	42.98	2.72	45.70	74.00	-28.30	H	Peak
4762.000	45.79	4.20	49.99	74.00	-24.01	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / IEEE 802.11n HT40 MHz (CH Mid)**Tested by:** Saber Huang**Ambient temperature:** 24°C**Relative humidity:** 52% RH**Date:** April 11, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2683.000	44.95	-1.93	43.02	74.00	-30.98	V	Peak
2899.000	44.35	-1.54	42.81	74.00	-31.19	V	Peak
3655.000	42.88	0.13	43.01	74.00	-30.99	V	Peak
4114.000	41.00	1.99	42.99	74.00	-31.01	V	Peak
4330.000	43.93	2.75	46.68	74.00	-27.32	V	Peak
4762.000	44.69	4.20	48.89	74.00	-25.11	V	Peak
<hr/>							
2197.000	46.08	-3.92	42.16	74.00	-31.84	H	Peak
2674.000	45.97	-1.95	44.02	74.00	-29.98	H	Peak
3169.000	51.39	-1.08	50.31	74.00	-23.69	H	Peak
4105.000	41.89	1.96	43.85	74.00	-30.15	H	Peak
4411.000	42.74	3.04	45.78	74.00	-28.22	H	Peak
4762.000	45.03	4.20	49.23	74.00	-24.77	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Mode:** TX / EEE 802.11n HT40 MHz (CH High)**Tested by:** Saber Huang**Ambient temperature:** 24°C**Relative humidity:** 52% RH**Date:** April 11, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2206.000	45.21	-3.87	41.34	74.00	-32.66	V	Peak
2665.000	44.41	-1.96	42.45	74.00	-31.55	V	Peak
2818.000	44.45	-1.69	42.76	74.00	-31.24	V	Peak
3646.000	42.41	0.10	42.51	74.00	-31.49	V	Peak
4285.000	43.99	2.59	46.58	74.00	-27.42	V	Peak
4987.000	42.20	4.94	47.14	74.00	-26.86	V	Peak
2206.000	46.34	-3.87	42.47	74.00	-31.53	H	Peak
2692.000	46.64	-1.91	44.73	74.00	-29.27	H	Peak
3169.000	51.79	-1.08	50.71	74.00	-23.29	H	Peak
3646.000	44.31	0.10	44.41	74.00	-29.59	H	Peak
4204.000	44.01	2.31	46.32	74.00	-27.68	H	Peak
4762.000	44.67	4.20	48.87	74.00	-25.13	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.3. 6dB BANDWIDTH MEASUREMENT

7.3.1. LIMITS

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz.

7.3.2. TEST INSTRUMENTS


Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	N9010A	MY52221469	01/27/2018	01/26/2019

7.3.3. TEST PROCEDURES (please refer to measurement standard)

8.2 Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW \geq 3 RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be \geq 6 dB.

7.3.4. TEST SETUP





7.3.5. TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	9044	>500	PASS
Mid	2437	9045		PASS
High	2462	9044		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	15670	>500	PASS
Mid	2437	15650		PASS
High	2462	15730		PASS

Test mode: IEEE 802.11n HT20 MHz

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	16790	>500	PASS
Mid	2437	16790		PASS
High	2462	16790		PASS

Test mode: IEEE 802.11n HT40 MHz


Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2422	35350	>500	PASS
Mid	2437	35350		PASS
High	2452	35340		PASS




Test Plot

IEEE 802.11b mode

6dB Bandwidth (CH Low)

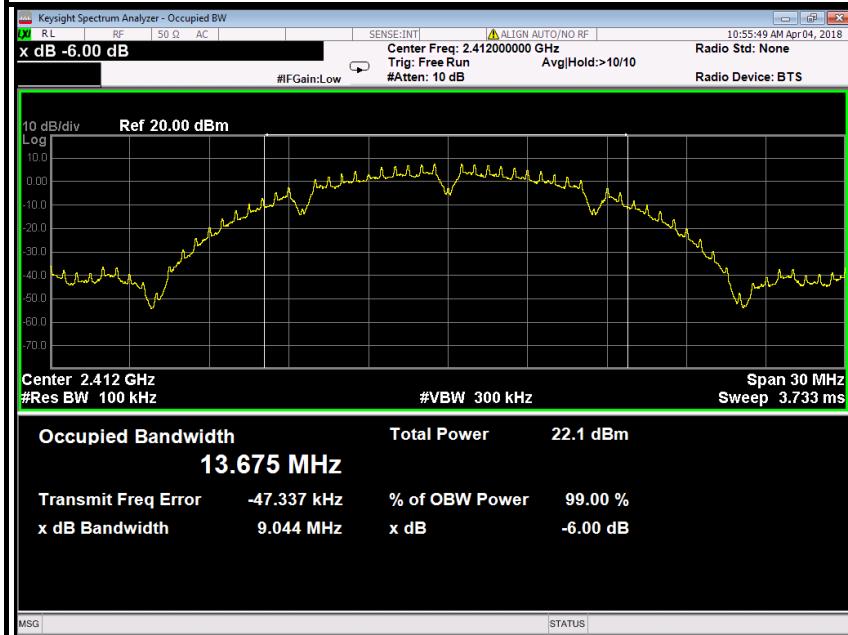


6dB Bandwidth (CH Mid)

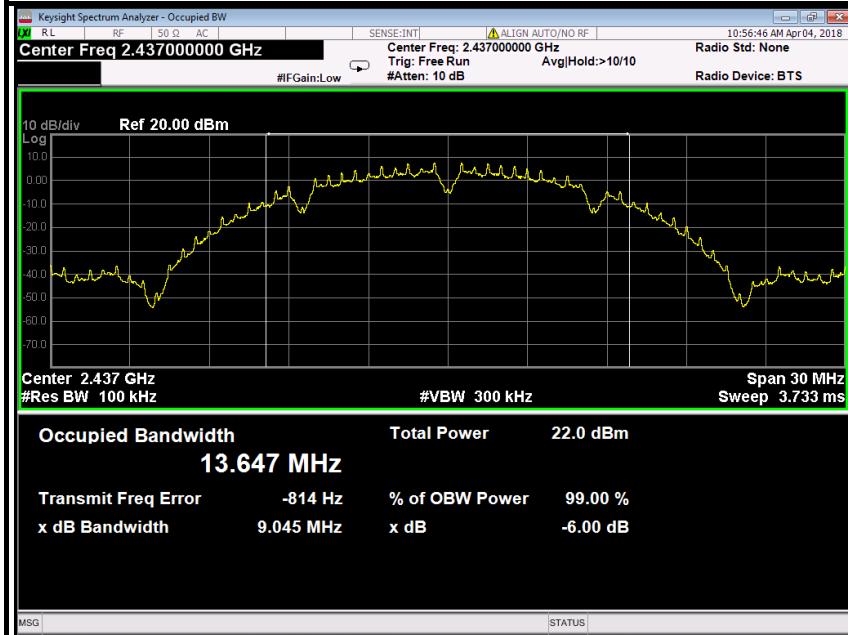




6dB Bandwidth (CH High)

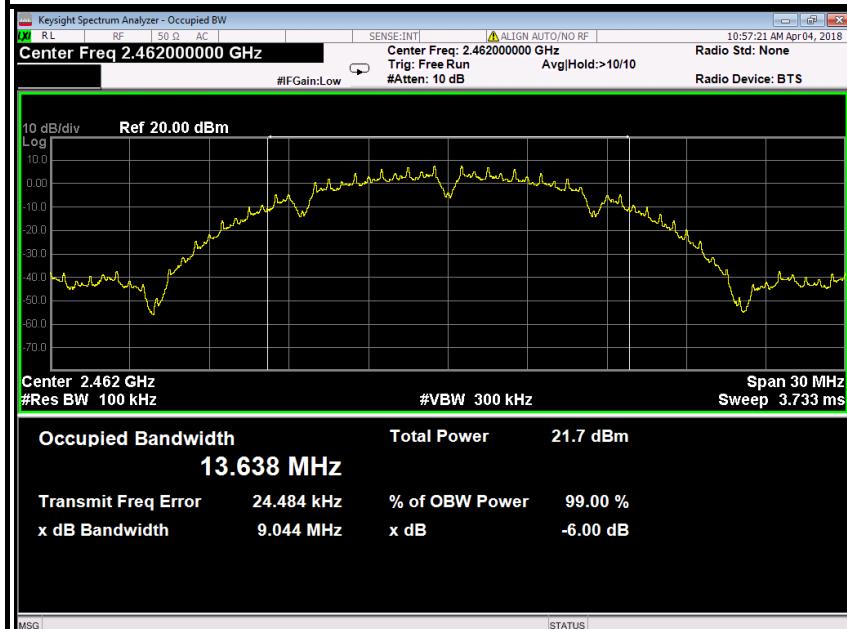


IEEE 802.11g mode

6dB Bandwidth (CH Low)

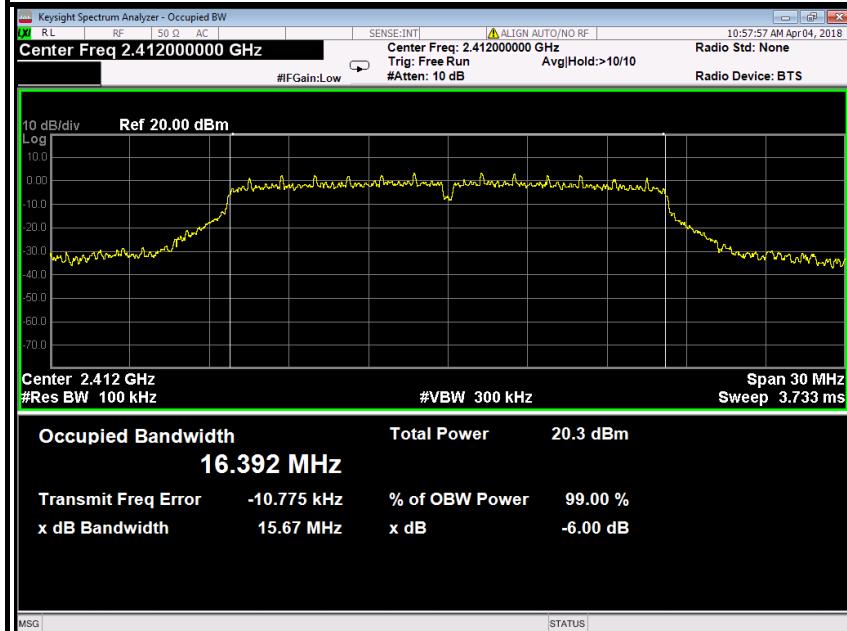






6dB Bandwidth (CH Mid)

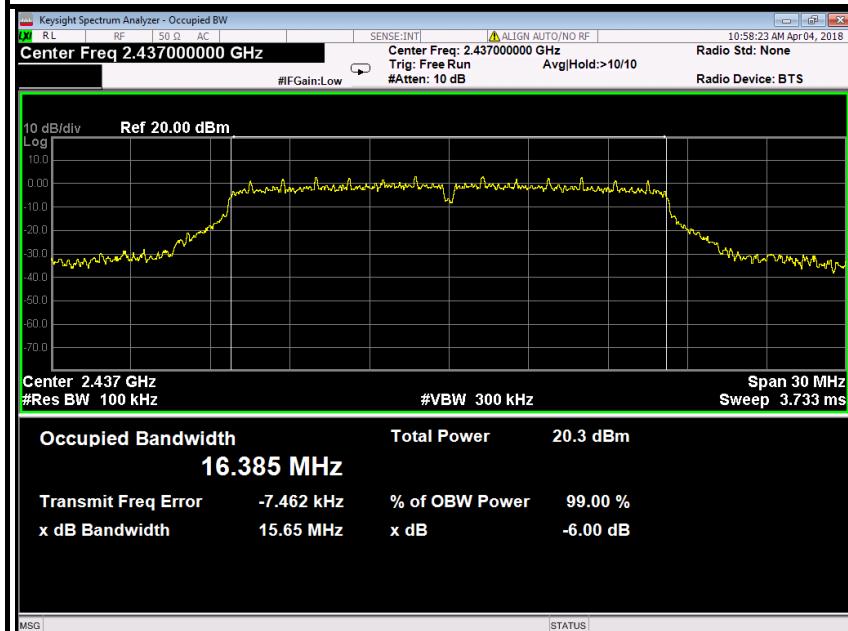


6dB Bandwidth (CH High)

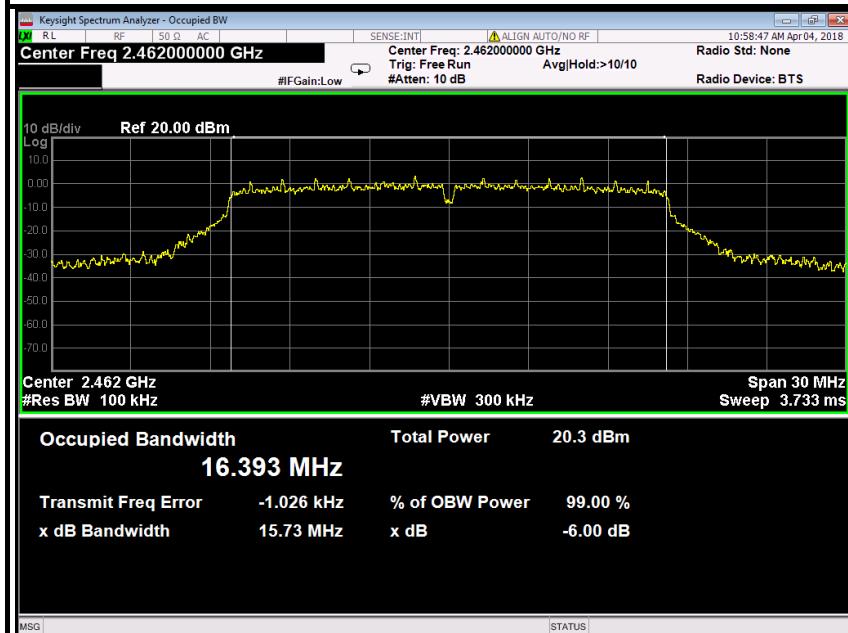

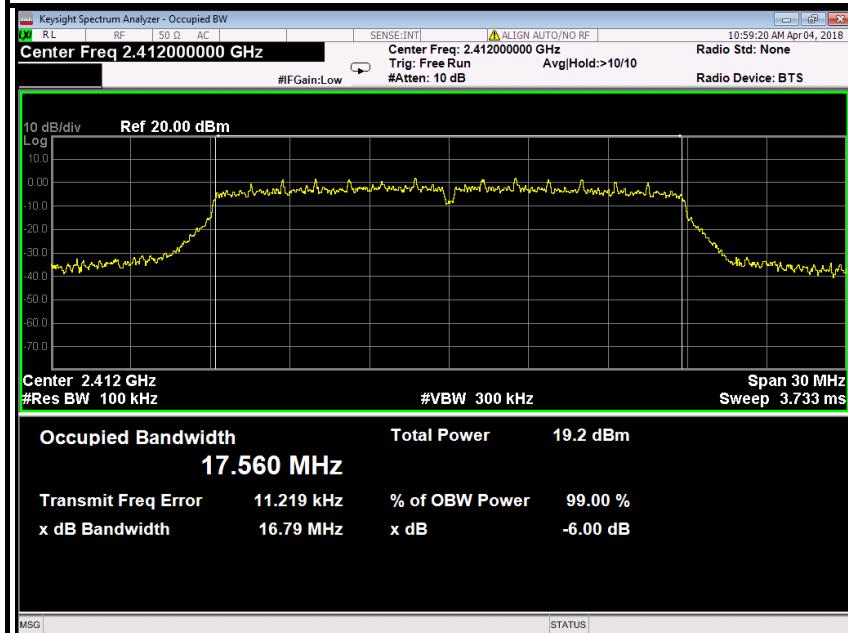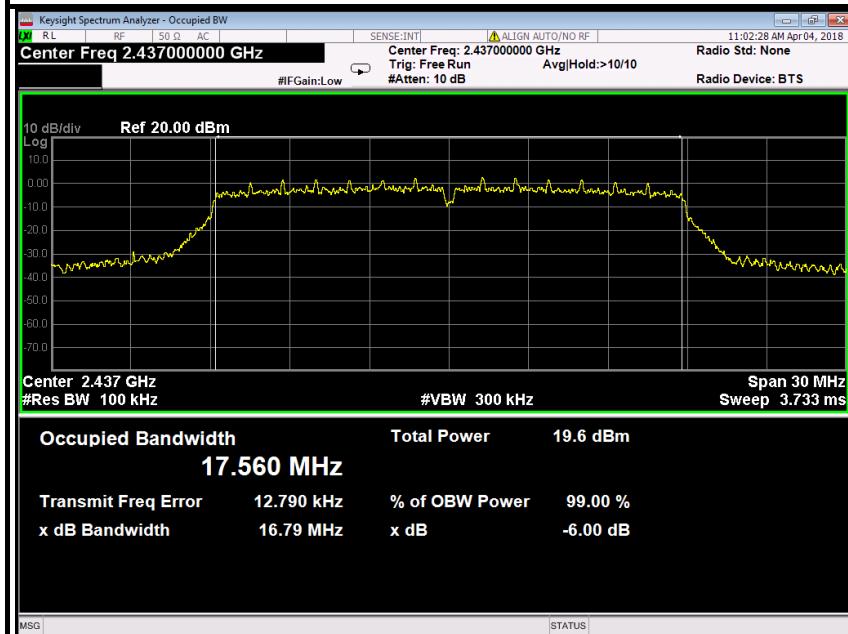**IEEE 802.11n HT20 MHz mode****6dB Bandwidth (CH Low)****6dB Bandwidth (CH Mid)**




6dB Bandwidth (CH High)

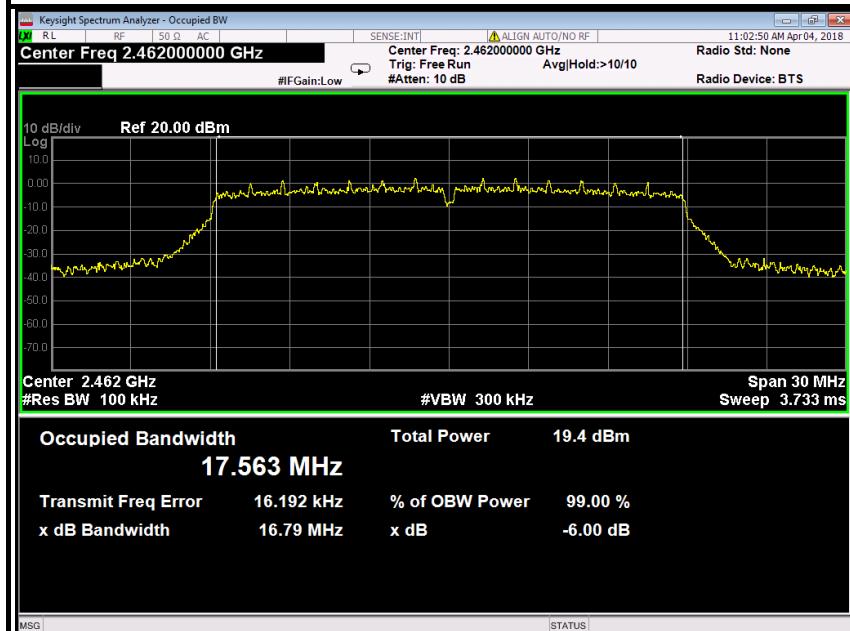


IEEE 802.11n HT40 MHz mode

6dB Bandwidth (CH Low)

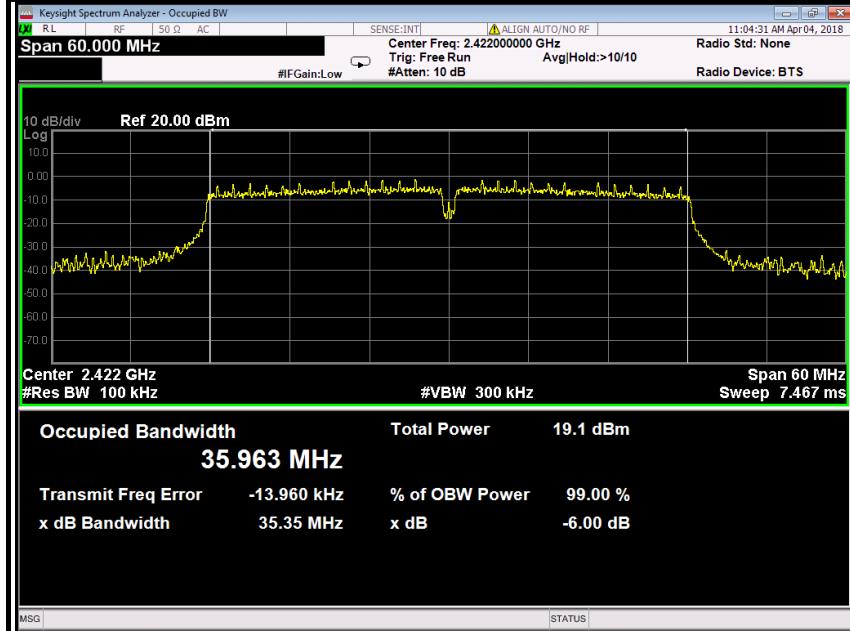




6dB Bandwidth (CH Mid)

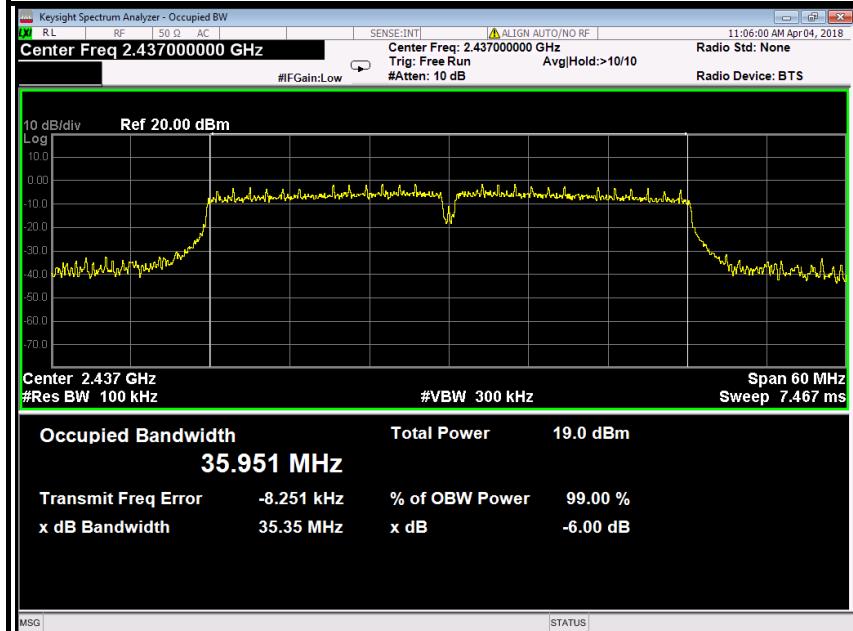

6dB Bandwidth (CH High)

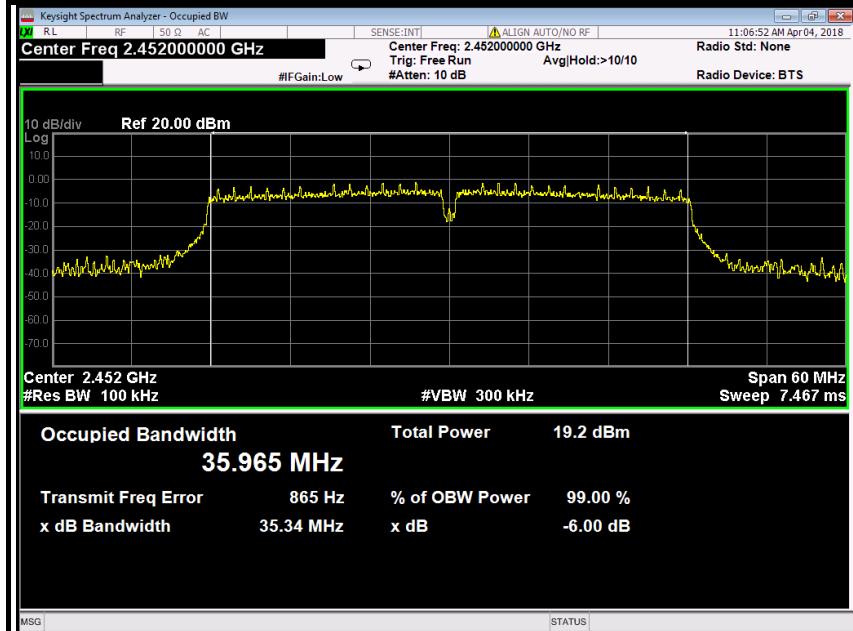



7.4. ANTENNA GAIN

MEASUREMENT

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the DSSS mode is used.

MEASUREMENT PARAMETERS

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz
Trace-Mode	Max hold

LIMITS

FCC	IC
Antenna Gain	
6 dBi	

TEST RESULTS

IEEE 802.11b

T _{nom}	V _{nom}	Lowest channel 2412MHz	Middle channel 2437MHz	Highest channel 2462MHz
Conducted power [dBm/MHz] Measured with DSSS modulation		6.91	7.00	6.96
Radiated power [dBm/MHz] Measured with DSSS modulation		8.03	7.93	7.82
Gain [dBi] Calculated		1.12	0.93	0.86
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)			



7.5. PEAK OUTPUT POWER

7.5.1. LIMITS

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.5.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Power Meter	Anritsu	ML2495A	1204003	02/21/2018	02/20/2019
Power Sensor	Anritsu	MA2411B	1126150	02/21/2018	02/20/2019

7.5.3. TEST PROCEDURES (please refer to measurement standard)

9.1.1 RBW \geq DTS bandwidth


This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the *DTS bandwidth*.

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW \geq 3 RBW.
- c) Set span \geq 3 x RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

9.1.3 PKPM1 Peak power meter method

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

7.5.4. TEST SETUP

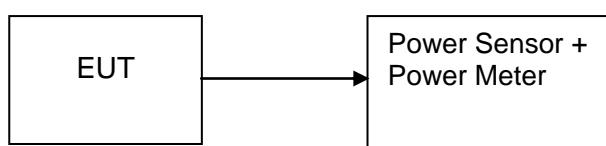



7.5.5. TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Peak / AVG	Limit (W)	Result
Low	2412	18.27	0.06714	Peak	1	PASS
Mid	2437	18.35	0.06839			PASS
High	2462	18.31	0.06776			PASS
Low	2412	16.27	0.04236	AVG	1	PASS
Mid	2437	16.31	0.04276			PASS
High	2462	16.30	0.04266			PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Peak / AVG	Limit (W)	Result
Low	2412	23.02	0.20045	Peak	1	PASS
Mid	2437	23.00	0.19953			PASS
High	2462	23.16	0.20701			PASS
Low	2412	15.14	0.03266	AVG	1	PASS
Mid	2437	15.05	0.03199			PASS
High	2462	15.20	0.03311			PASS

Test mode: IEEE 802.11n HT20 MHz

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Peak / AVG	Limit (W)	Result
Low	2412	21.63	0.14555	Peak	1	PASS
Mid	2437	23.23	0.21038			PASS
High	2462	23.46	0.22182			PASS
Low	2412	14.56	0.02858	AVG	1	PASS
Mid	2437	14.58	0.02871			PASS
High	2462	14.71	0.02958			PASS

Test mode: IEEE 802.11n HT40 MHz

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Peak / AVG	Limit (W)	Result
Low	2422	22.17	0.16482	Peak	1	PASS
Mid	2437	23.46	0.22182			PASS
High	2452	23.55	0.22646			PASS
Low	2422	12.53	0.01791	AVG	1	PASS
Mid	2437	15.18	0.03296			PASS
High	2452	12.60	0.01820			PASS



7.6. BAND EDGES MEASUREMENT

7.6.1. LIMITS

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

7.6.2. TEST INSTRUMENTS


Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	N9010A	MY52221469	01/27/2018	01/26/2019
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2018	02/20/2019
Amplifier	EMEC	EM330	060661	03/18/2018	03/17/2019
High Noise Amplifier	Agilent	8449B	3008A01838	02/21/2018	02/20/2019
Loop Antenna	COM-POWER	AL-130	121044	09/25/2017	09/24/2018
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2018	02/20/2019
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/27/2018	02/27/2019
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/27/2018	02/27/2019
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	01/29/2018	01/28/2019
Test S/W	FARAD		LZ-RF / CCS-SZ-3A2		

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The FCC Site Registration number is 101879.
3. N.C.R = No Calibration Required.

7.6.3. TEST PROCEDURES (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=1/T / Sweep=AUTO / Detector=PEAK
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

7.6.4. TEST SETUP

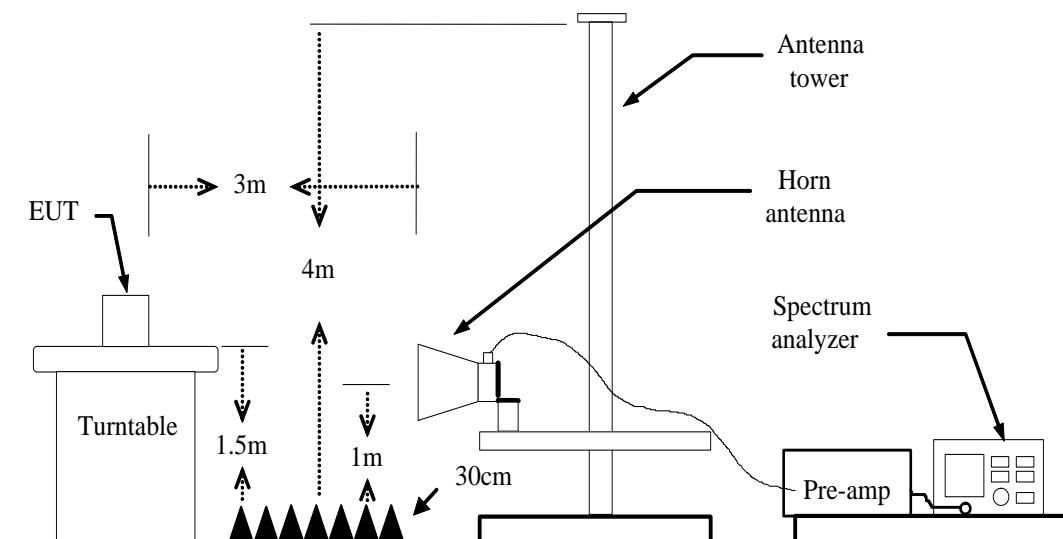




7.6.5. TEST RESULTS


Test Plot

IEEE 802.11b mode

Band Edges (CH Low)

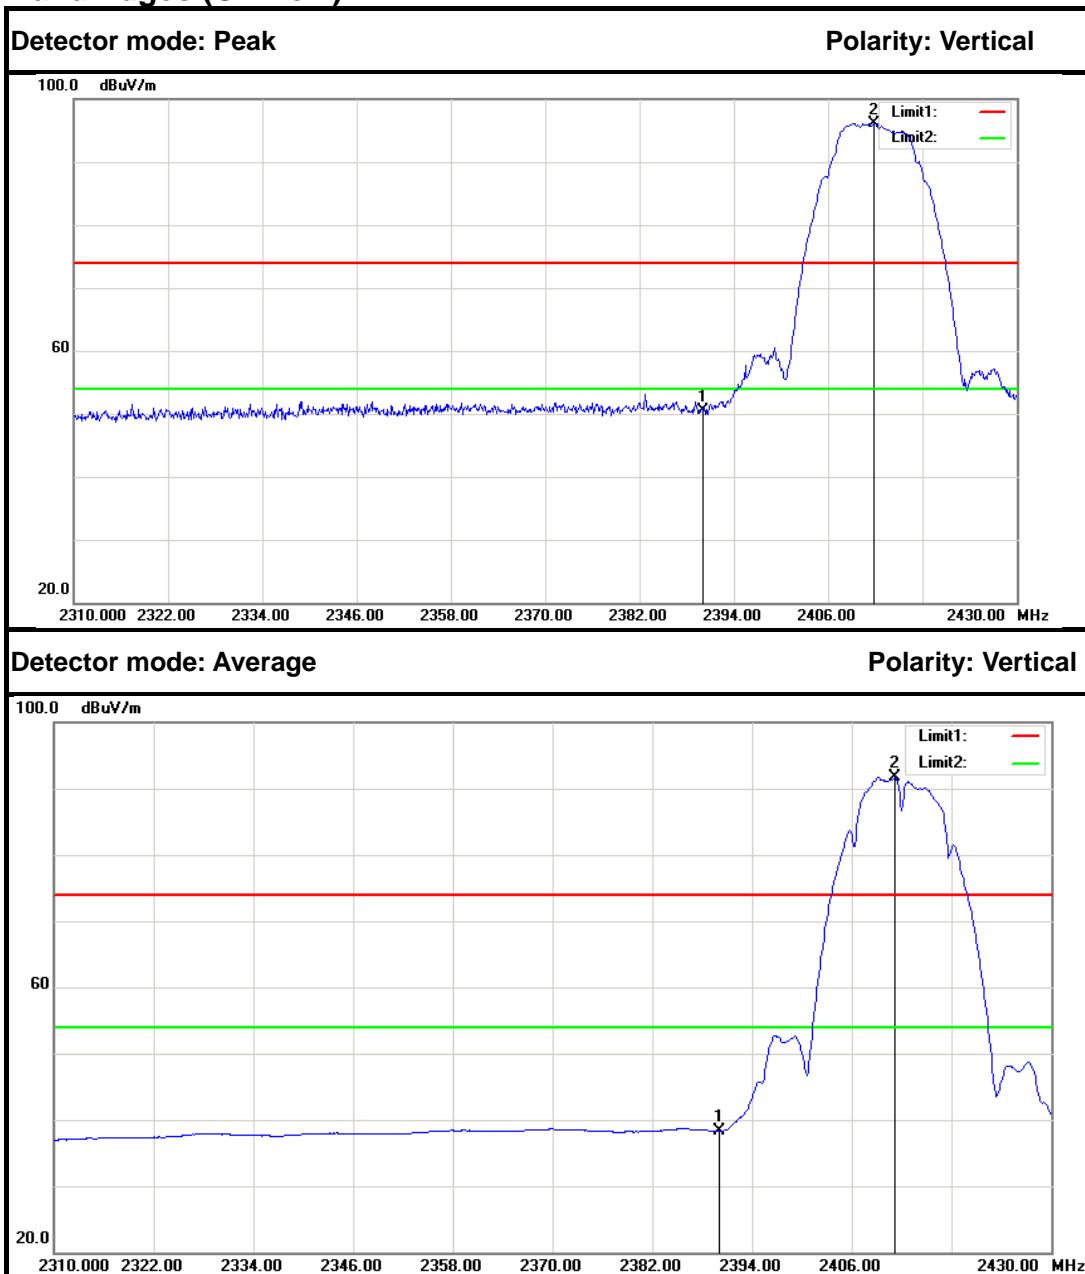


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	53.27	-2.86	50.41	74.00	-23.59	Peak	Vertical
2.	2411.880	98.92	-2.74	96.18	---	---	Peak	Vertical
1.	2390.000	41.17	-2.86	38.31	54.00	-15.69	Average	Vertical
2.	2411.160	94.42	-2.75	91.67	---	---	Average	Vertical

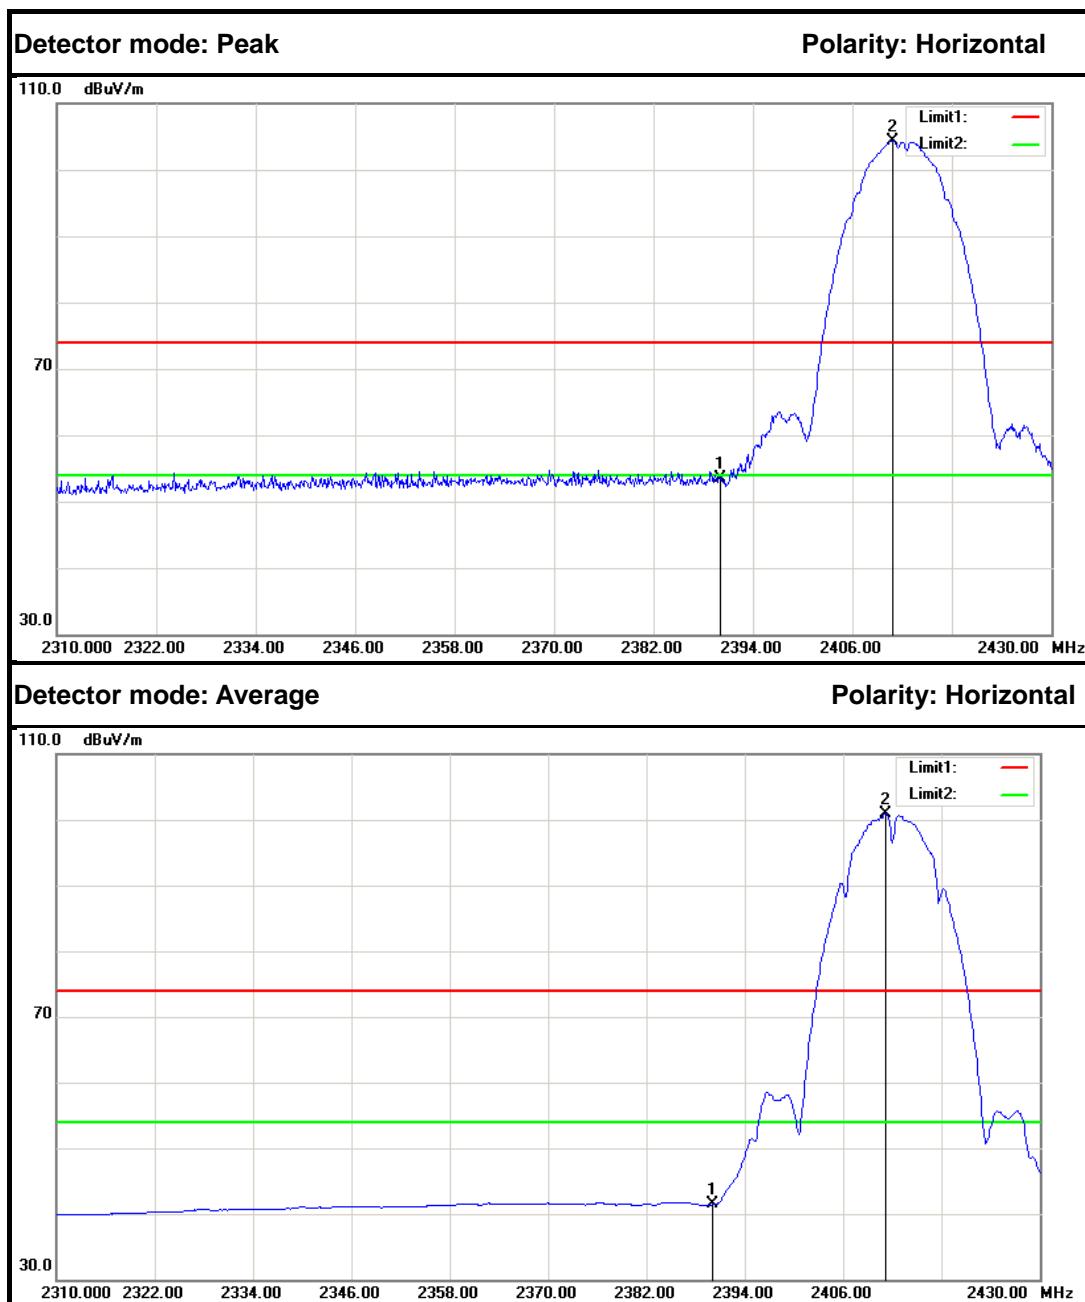

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	56.44	-2.86	53.58	74.00	-20.42	Peak	Horizontal I
2.	2410.920	107.08	-2.75	104.33	---	---	Peak	Horizontal I
1.	2390.000	44.28	-2.86	41.42	54.00	-12.58	Average	Horizontal I
2.	2411.160	103.70	-2.75	100.95	---	---	Average	Horizontal I


**Band Edges (CH High)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2460.850	106.71	-2.47	104.24	---	---	Peak	Vertical
2.	2483.500	55.98	-2.35	53.63	74.00	-20.37	Peak	Vertical
1.	2461.250	103.18	-2.47	100.71	---	---	Average	Vertical
2.	2483.500	43.89	-2.35	41.54	54.00	-12.46	Average	Vertical

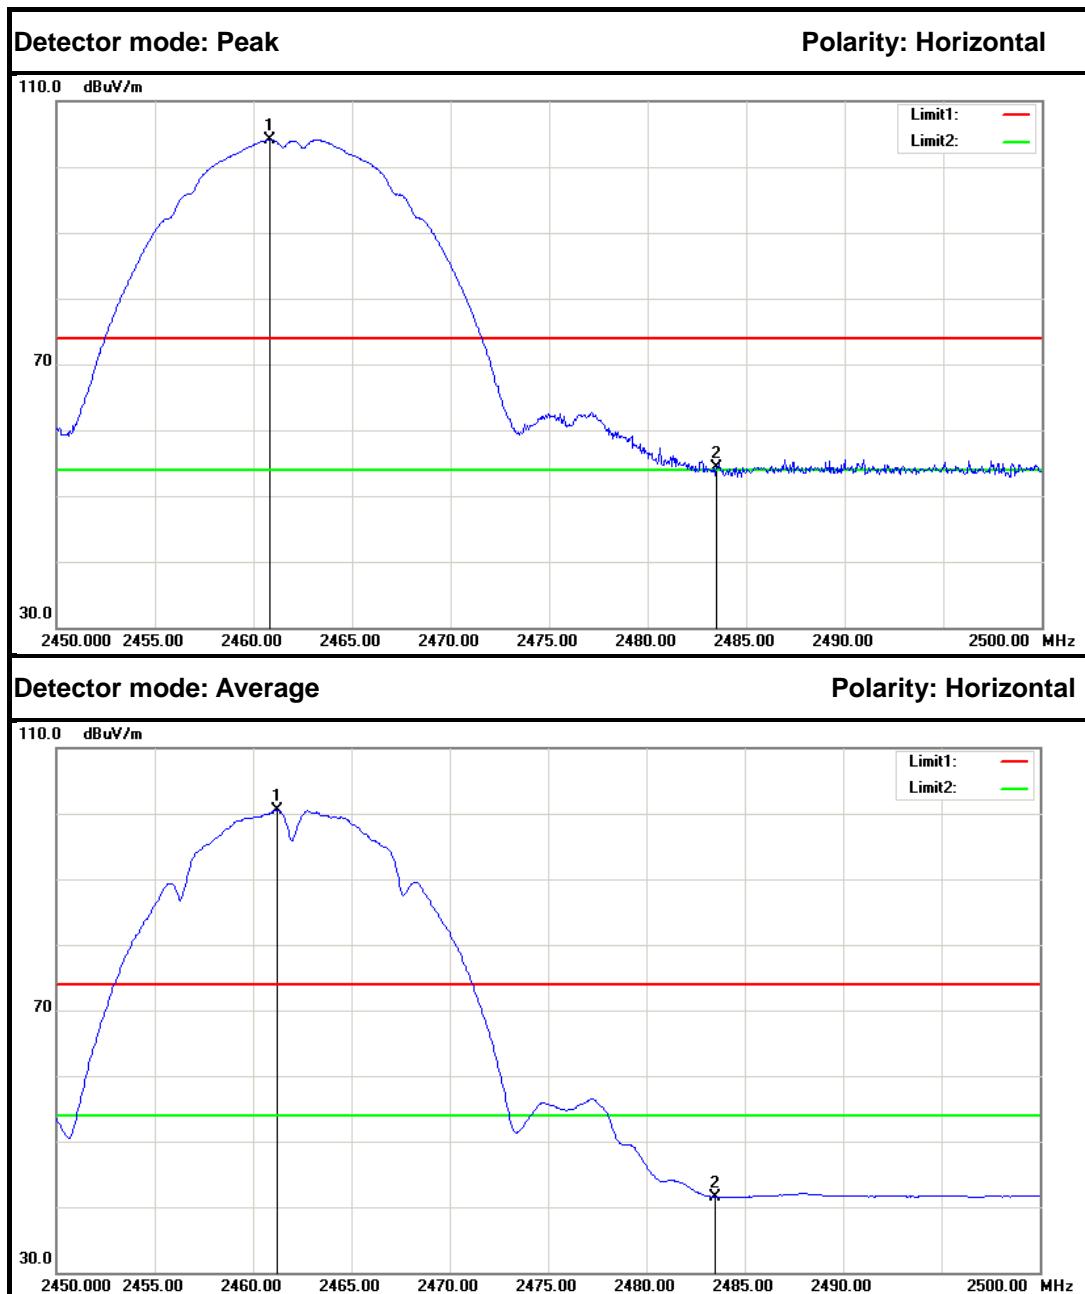


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2460.850	106.58	-2.47	104.11	---	---	Peak	Horizontal I
2.	2483.500	56.60	-2.35	54.25	74.00	-19.75	Peak	Horizontal I
1.	2461.250	103.07	-2.47	100.60	---	---	Average	Horizontal I
2.	2483.500	43.92	-2.35	41.57	54.00	-12.43	Average	Horizontal I



IEEE 802.11g mode

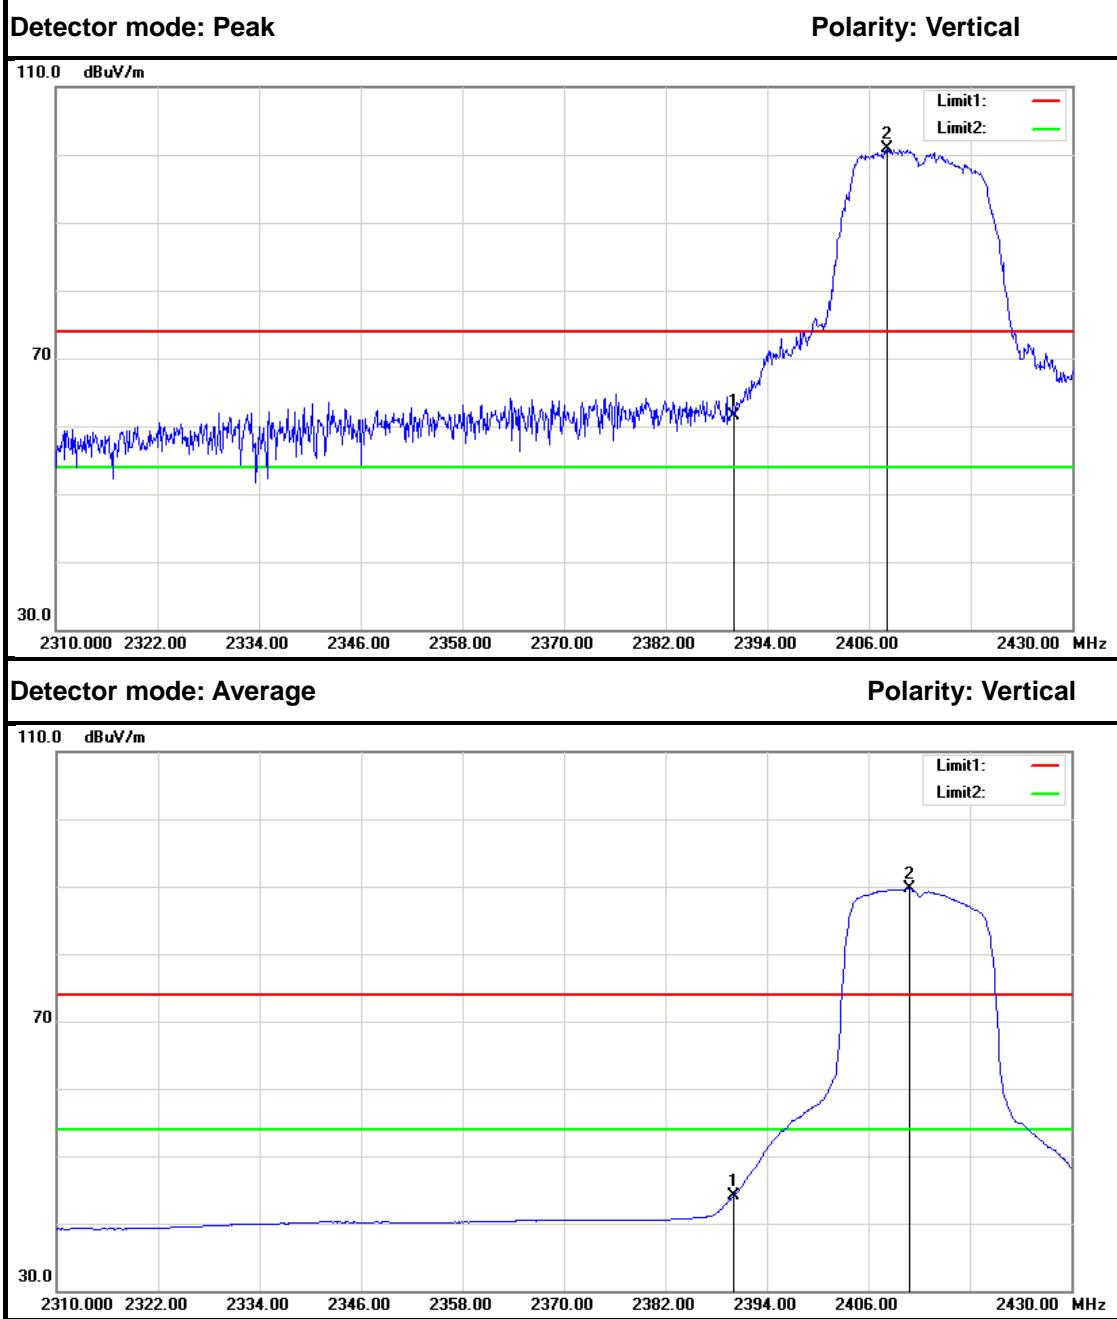**Band Edges (CH Low)**


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	64.45	-2.86	61.59	74.00	-12.41	Peak	Vertical
2.	2408.160	103.57	-2.76	100.81	---	---	Peak	Vertical
1.	2390.000	46.94	-2.86	44.08	54.00	-9.92	Average	Vertical
2.	2410.920	92.43	-2.75	89.68	---	---	Average	Vertical

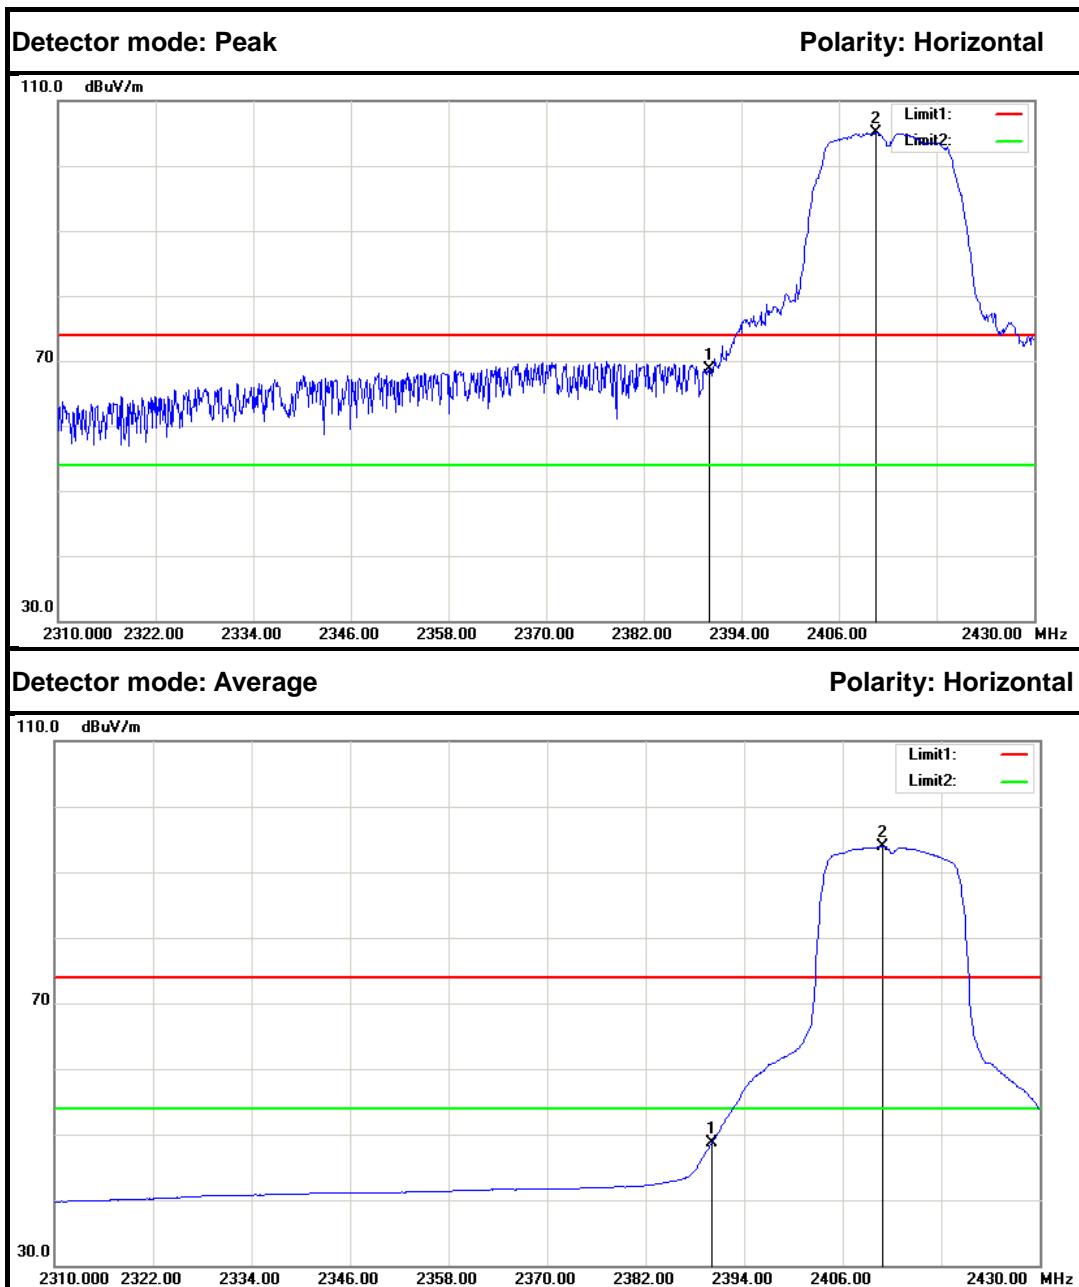


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	71.52	-2.86	68.66	74.00	-5.34	Peak	Horizontal I
2.	2410.560	107.93	-2.75	105.18	---	---	Peak	Horizontal I
1.	2390.000	51.55	-2.86	48.69	54.00	-5.31	Average	Horizontal I
2.	2410.920	96.72	-2.75	93.97	---	---	Average	Horizontal I

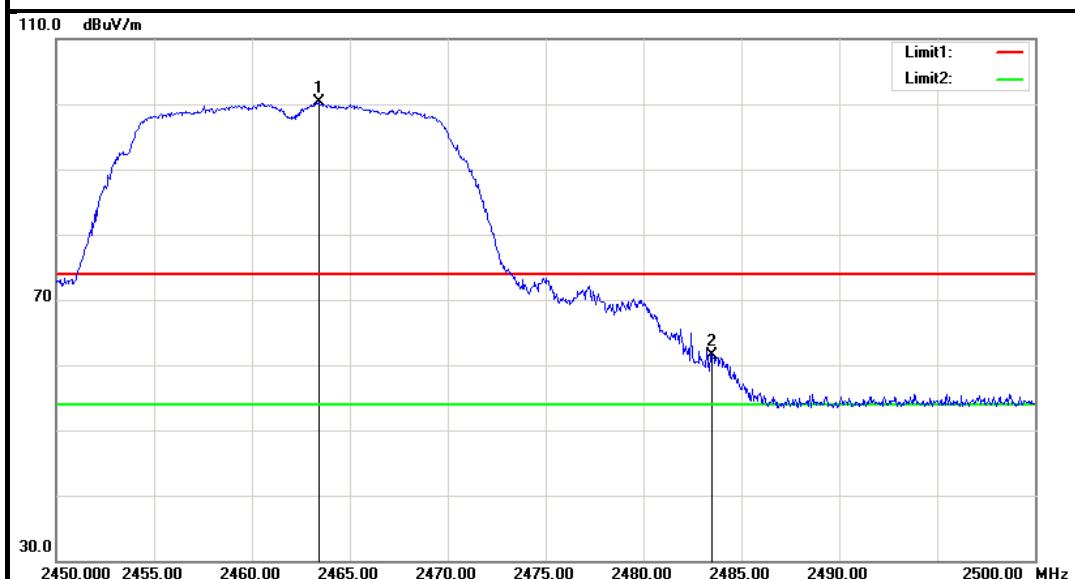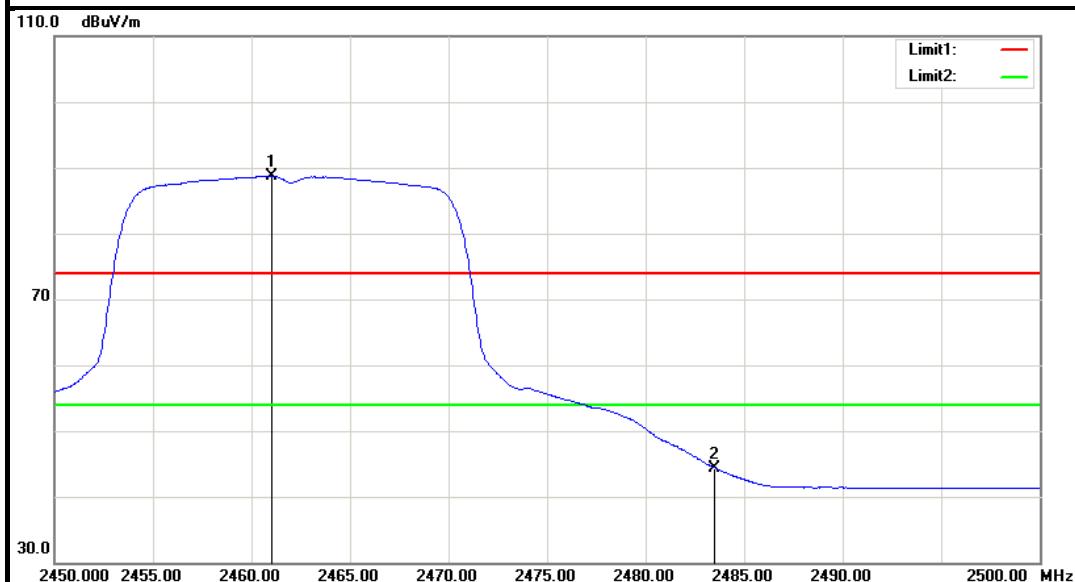**Band Edges (CH High)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2463.400	102.69	-2.46	100.23	---	---	Peak	Vertical
2.	2483.500	63.86	-2.35	61.51	74.00	-12.49	Peak	Vertical
1.	2461.000	91.23	-2.47	88.76	---	---	Average	Vertical
2.	2483.500	46.75	-2.35	44.40	54.00	-9.60	Average	Vertical

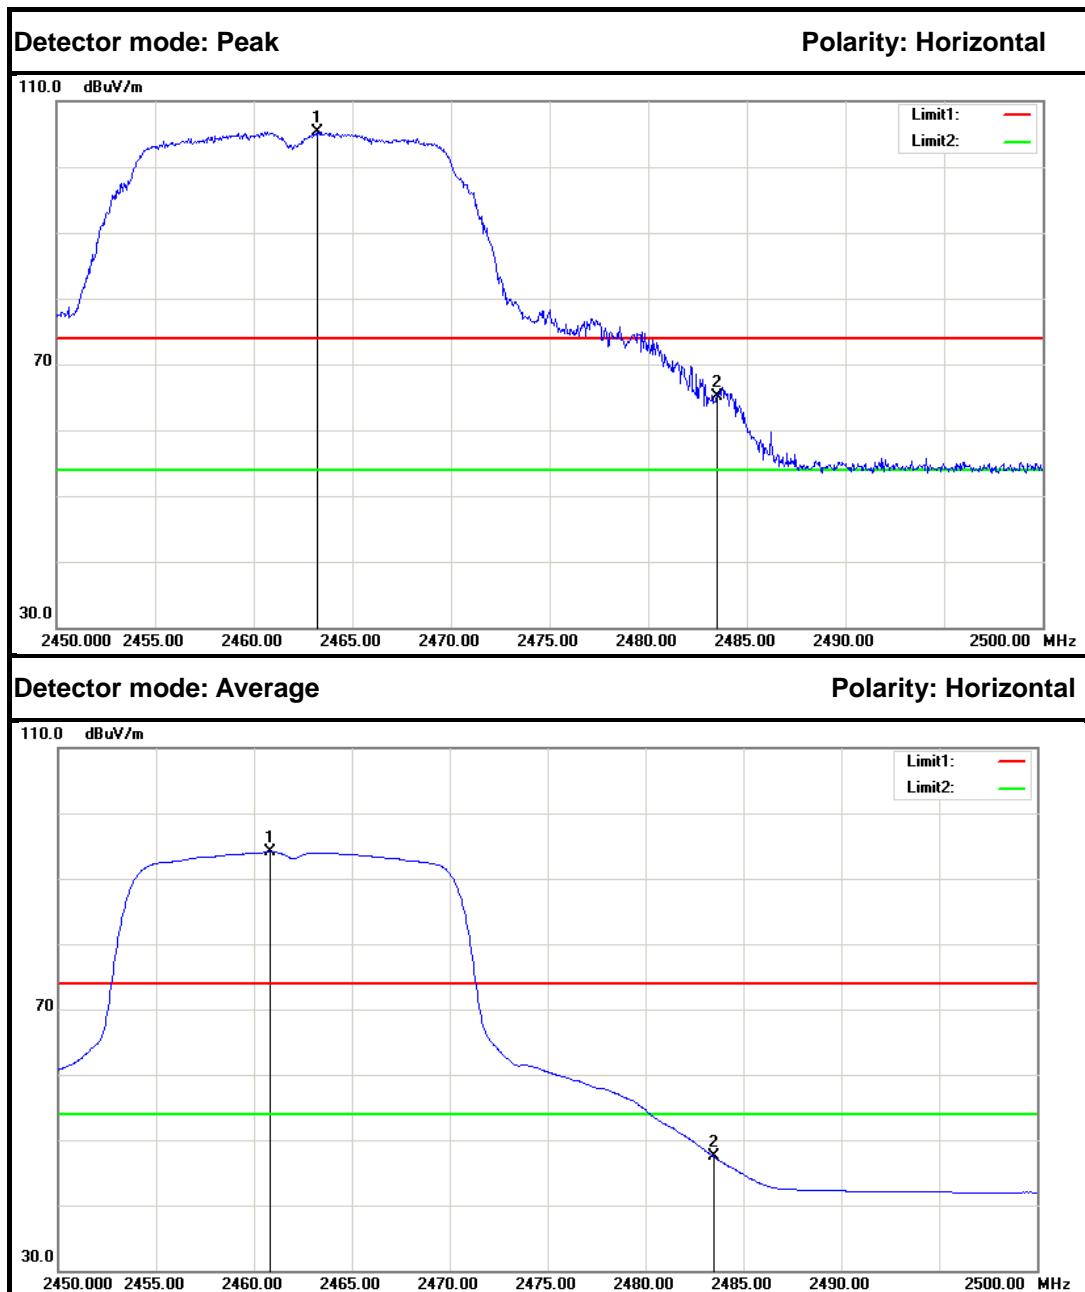


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2463.250	107.74	-2.46	105.28	---	---	Peak	Horizontal I
2.	2483.500	67.42	-2.35	65.07	74.00	-8.93	Peak	Horizontal I
1.	2460.850	96.55	-2.47	94.08	---	---	Average	Horizontal I
2.	2483.500	49.76	-2.35	47.41	54.00	-6.59	Average	Horizontal I

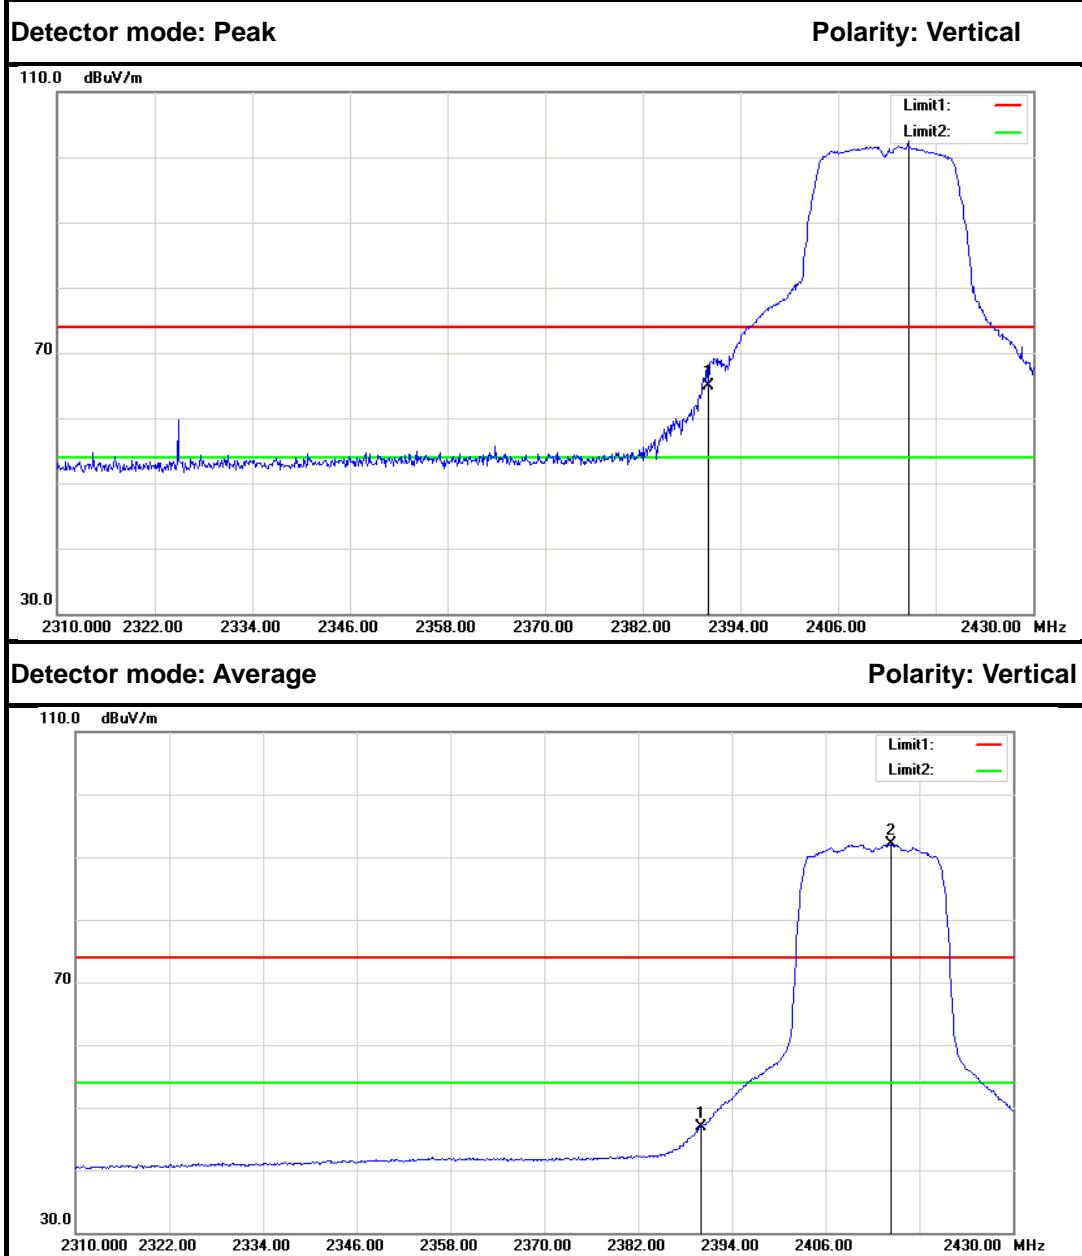**IEEE 802.11n HT20 MHz mode
Band Edges (CH Low)**


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	67.75	-2.86	64.89	74.00	-9.11	Peak	Vertical
2.	2414.640	105.31	-2.73	102.58	---	---	Peak	Vertical
1.	2390.000	49.71	-2.86	46.85	54.00	-7.15	Average	Vertical
2.	2414.400	94.79	-2.73	92.06	---	---	Average	Vertical

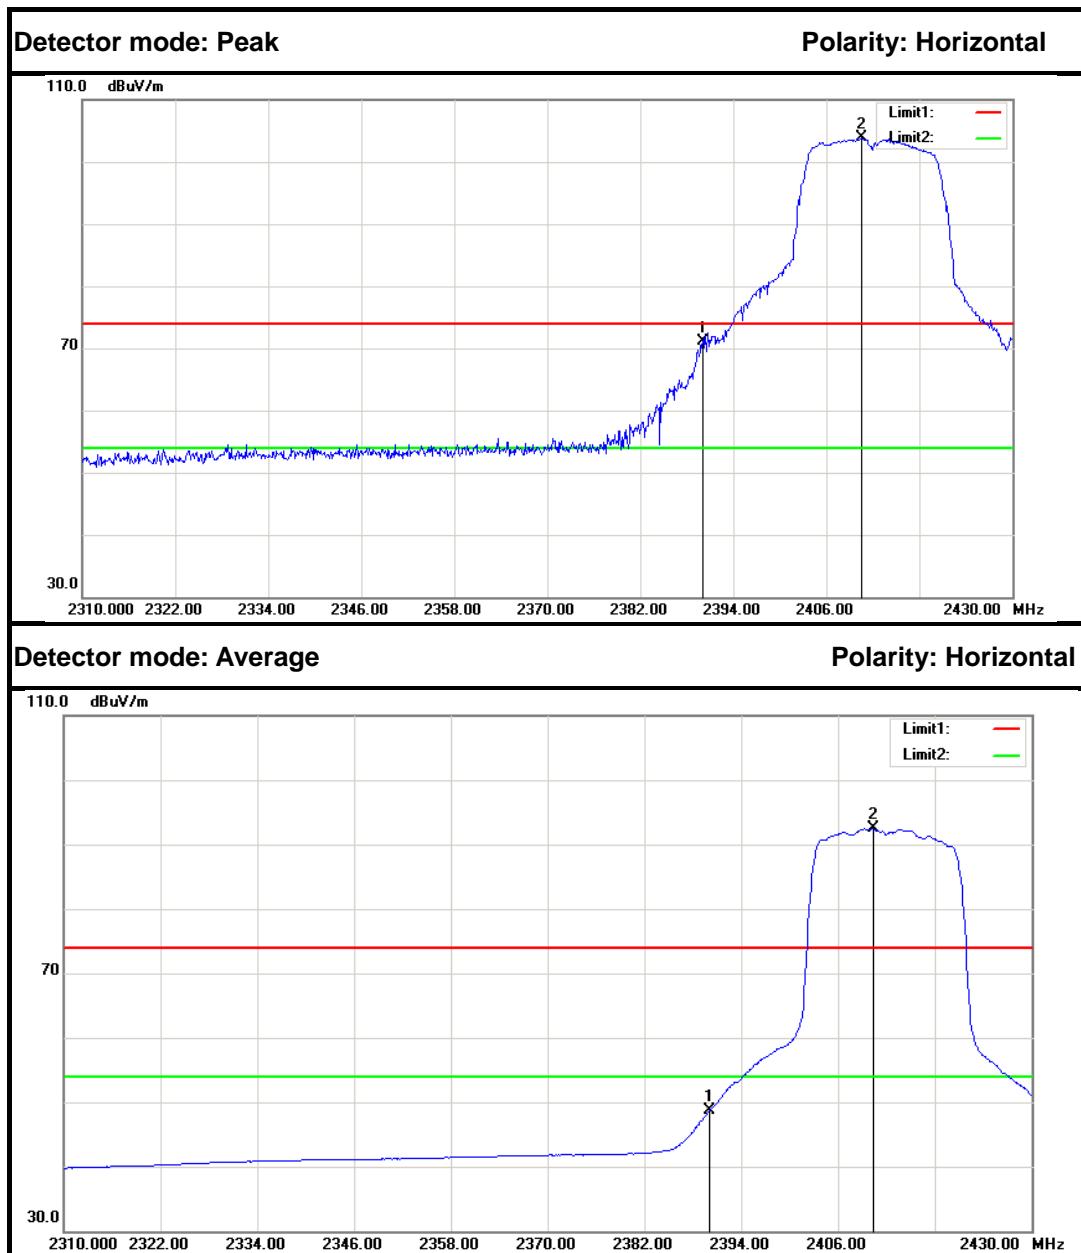


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	74.06	-2.86	71.20	74.00	-2.80	Peak	Horizontal I
2.	2410.560	106.67	-2.75	103.92	---	---	Peak	Horizontal I
1.	2390.000	51.51	-2.86	48.65	54.00	-5.35	Average	Horizontal I
2.	2410.320	95.17	-2.75	92.42	---	---	Average	Horizontal I

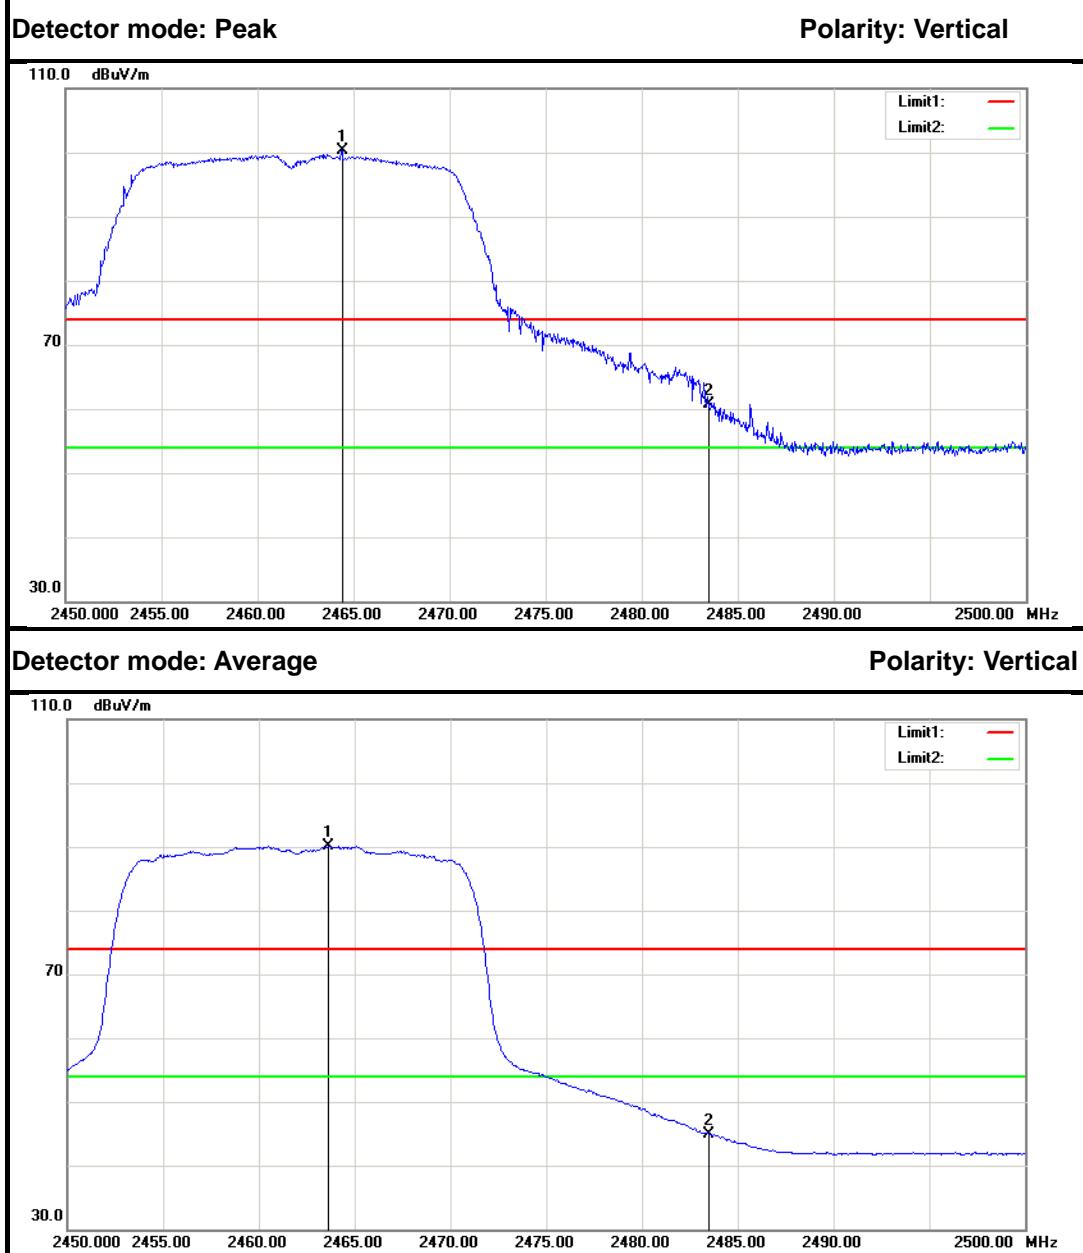**Band Edges (CH High)**


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2464.400	102.76	-2.45	100.31	---	---	Peak	Vertical
2.	2483.500	62.98	-2.35	60.63	74.00	-13.37	Peak	Vertical
1.	2463.650	92.62	-2.46	90.16	---	---	Average	Vertical
2.	2483.500	47.29	-2.35	44.94	54.00	-9.06	Average	Vertical

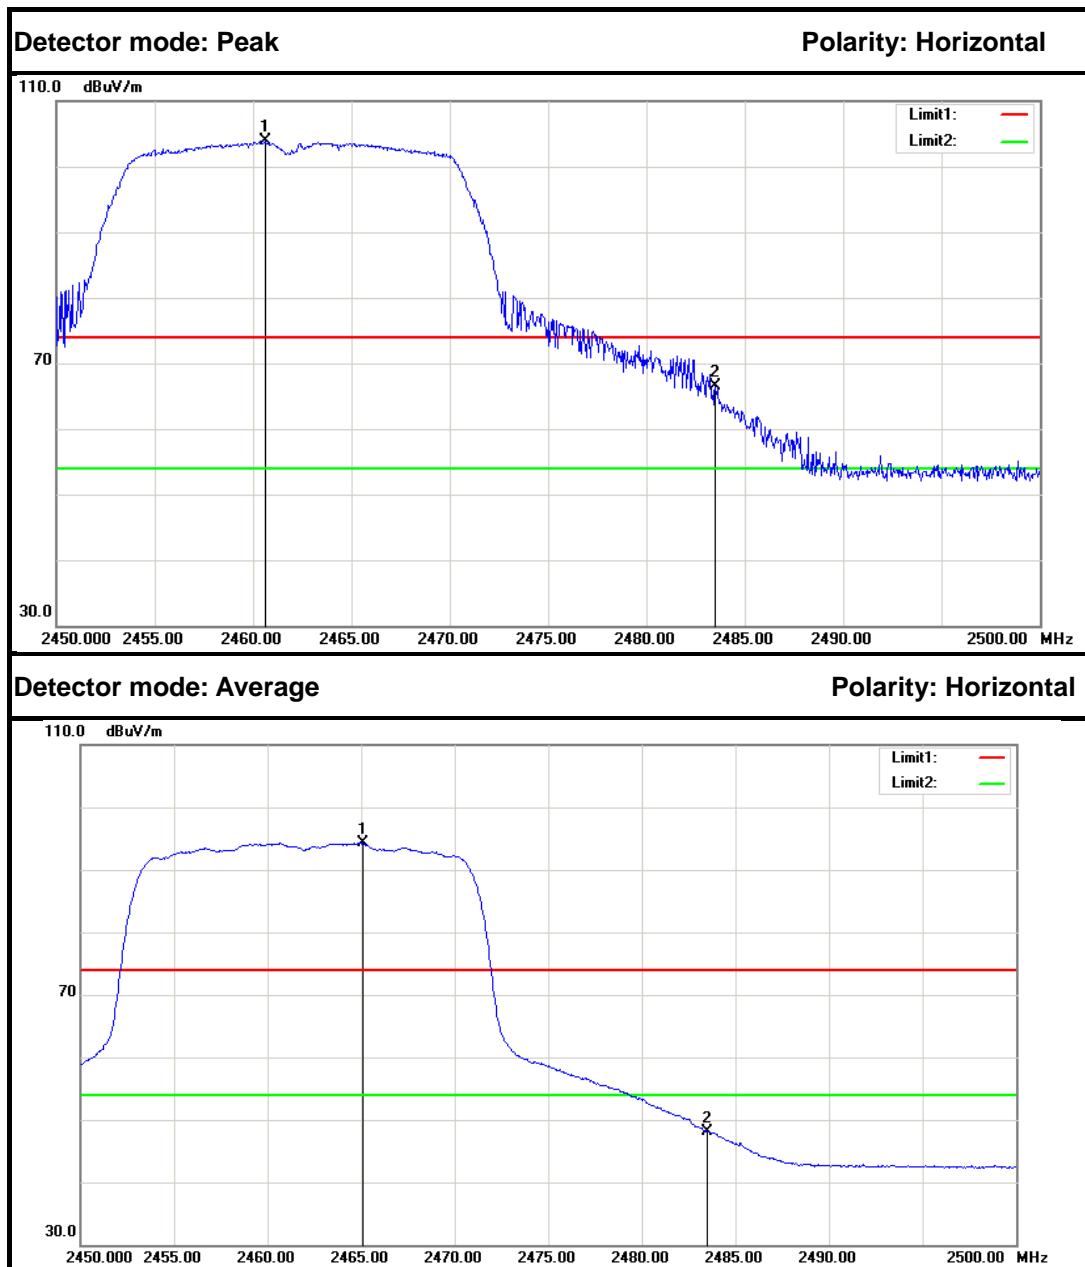

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2460.600	106.43	-2.48	103.95	---	---	Peak	Horizontal I
2.	2483.500	68.83	-2.35	66.48	74.00	-7.52	Peak	Horizontal I
1.	2465.100	96.70	-2.45	94.25	---	---	Average	Horizontal I
2.	2483.500	50.47	-2.35	48.12	54.00	-5.88	Average	Horizontal I

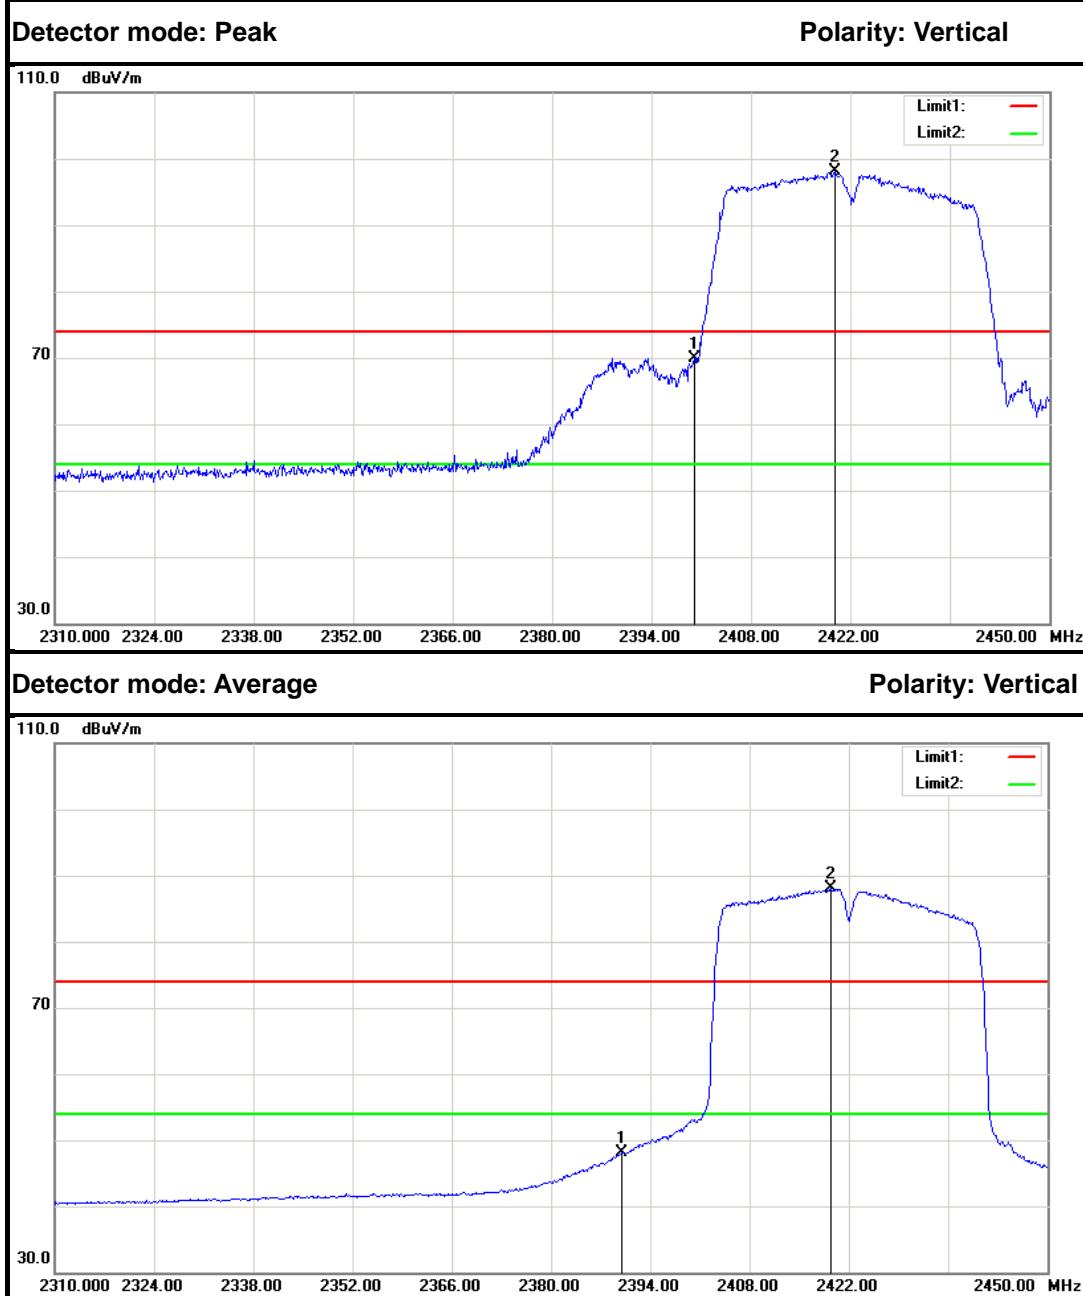**IEEE 802.11n HT40 MHz mode
Band Edges (CH Low)**

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2400.000	72.79	-2.81	69.98	74.00	-4.02	Peak	Vertical
2.	2419.760	100.77	-2.70	98.07	---	---	Peak	Vertical
1.	2390.000	50.93	-2.86	48.07	54.00	-5.93	Average	Vertical
2.	2419.480	90.76	-2.70	88.06	---	---	Average	Vertical

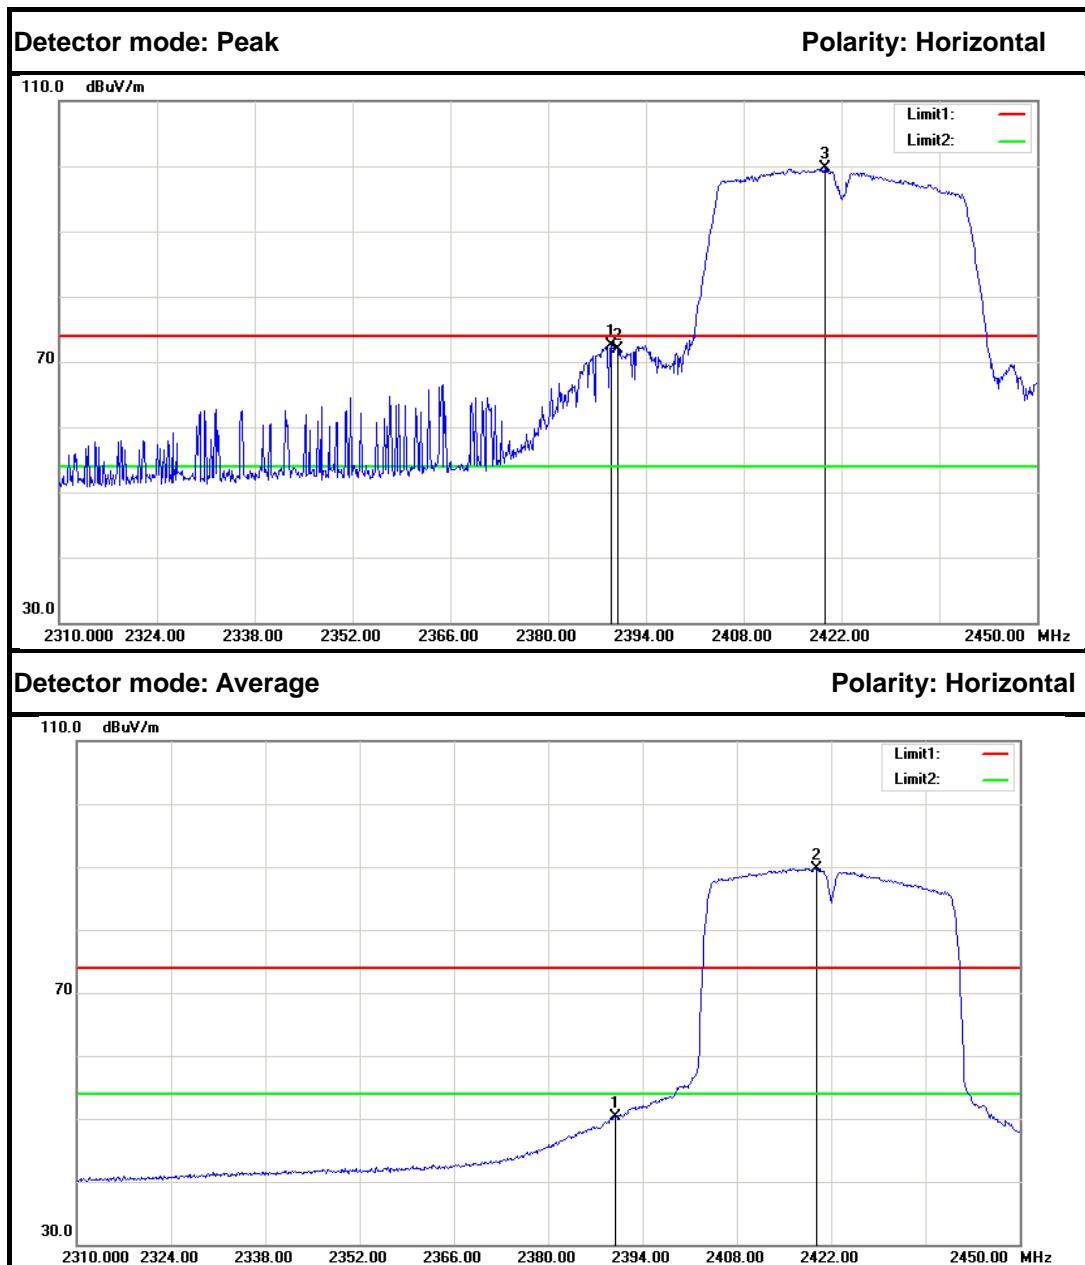


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2389.100	75.35	-2.87	72.48	74.00	-1.52	Peak	Horizontal I
2.	2390.000	74.84	-2.86	71.98	74.00	-2.02	Peak	Horizontal I
3.	2419.620	102.45	-2.70	99.75	---	---	Peak	Horizontal I
1.	2390.000	53.08	-2.86	50.22	54.00	-3.78	Average	Horizontal I
2.	2419.900	92.50	-2.70	89.80	---	---	Average	Horizontal I



Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

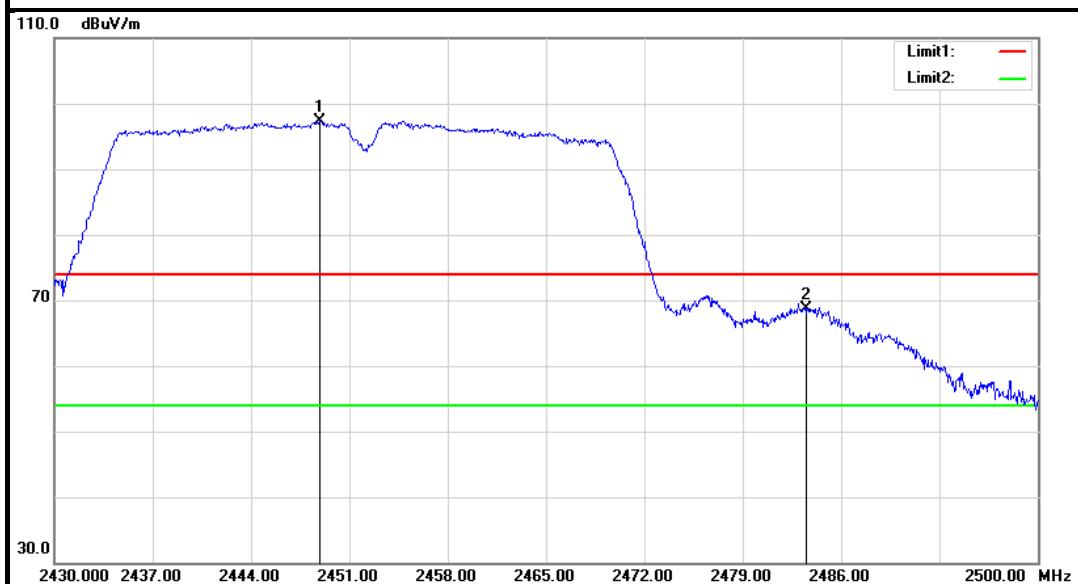


Detector mode: Average

Polarity: Vertical

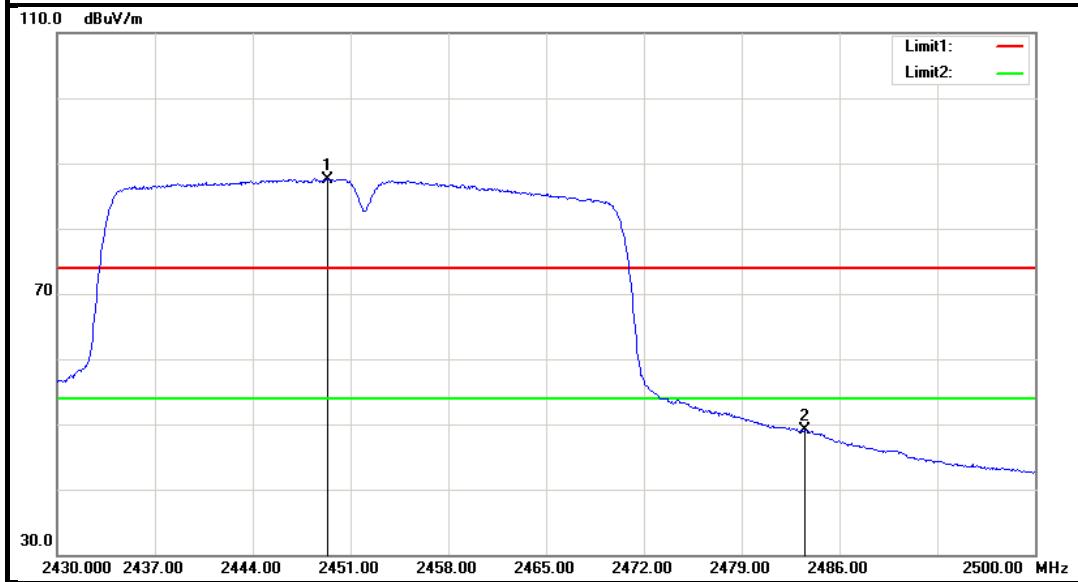

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2448.900	99.88	-2.54	97.34	---	---	Peak	Vertical
2.	2483.500	71.13	-2.35	68.78	74.00	-5.22	Peak	Vertical
1.	2449.390	90.14	-2.54	87.60	---	---	Average	Vertical
2.	2483.500	51.50	-2.35	49.15	54.00	-4.85	Average	Vertical

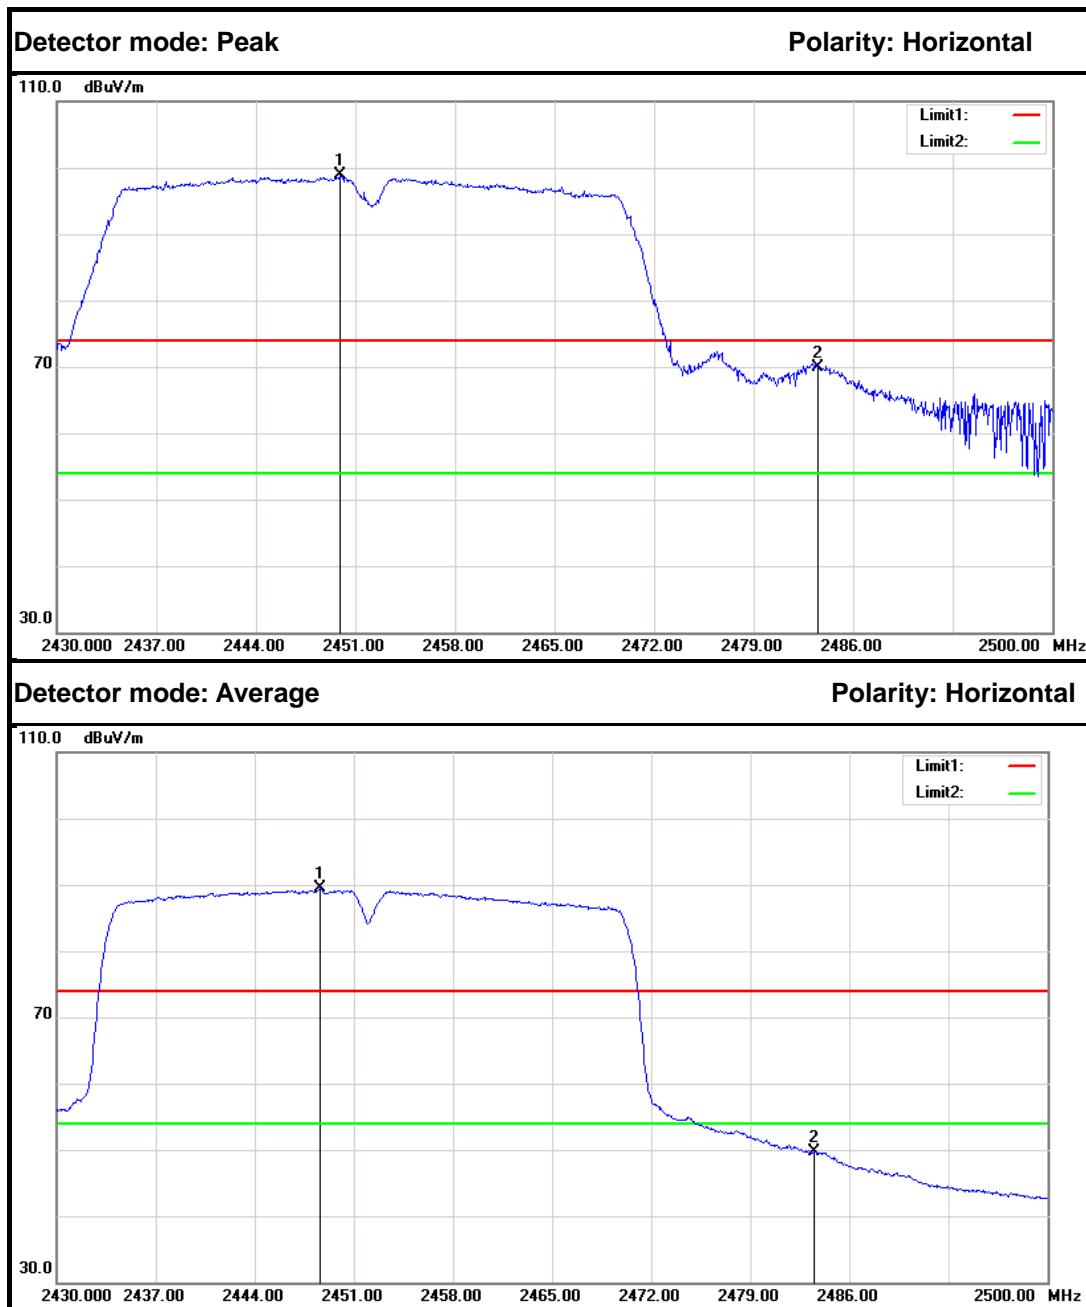

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2449.950	101.42	-2.53	98.89	---	---	Peak	Horizontal
2.	2483.500	72.24	-2.35	69.89	74.00	-4.11	Peak	Horizontal
1.	2448.620	92.03	-2.54	89.49	---	---	Average	Horizontal
2.	2483.500	51.97	-2.35	49.62	54.00	-4.38	Average	Horizontal



7.7. PEAK POWER SPECTRAL DENSITY MEASUREMENT

7.7.1. LIMITS

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

7.7.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	N9010A	MY52221469	01/27/2018	01/26/2019


7.7.3. TEST PROCEDURES (please refer to measurement standard)

§15.247(e) specifies a conducted power spectral density (PSD) limit of 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission. The same method as used to determine the conducted output power shall be used to determine the power spectral density (i.e., if peak-detected fundamental power was measured then use the peak PSD procedure and if average fundamental power was measured then use the average PSD procedure).

10.2 Method PKPSD (peak PSD)

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.7.4. TEST SETUP





7.7.5. TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-8.807	8	PASS
Mid	2437	-9.273		PASS
High	2462	-9.664		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-11.340	8	PASS
Mid	2437	-11.261		PASS
High	2462	-10.981		PASS

Test mode: IEEE 802.11n HT20 MHz

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-10.895	8	PASS
Mid	2437	-11.691		PASS
High	2462	-11.723		PASS

Test mode: IEEE 802.11n HT40 MHz

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2422	-15.091	8	PASS
Mid	2437	-15.382		PASS
High	2452	-14.826		PASS




Test Plot

IEEE 802.11b mode

PPSD (CH Low)



PPSD (CH Mid)

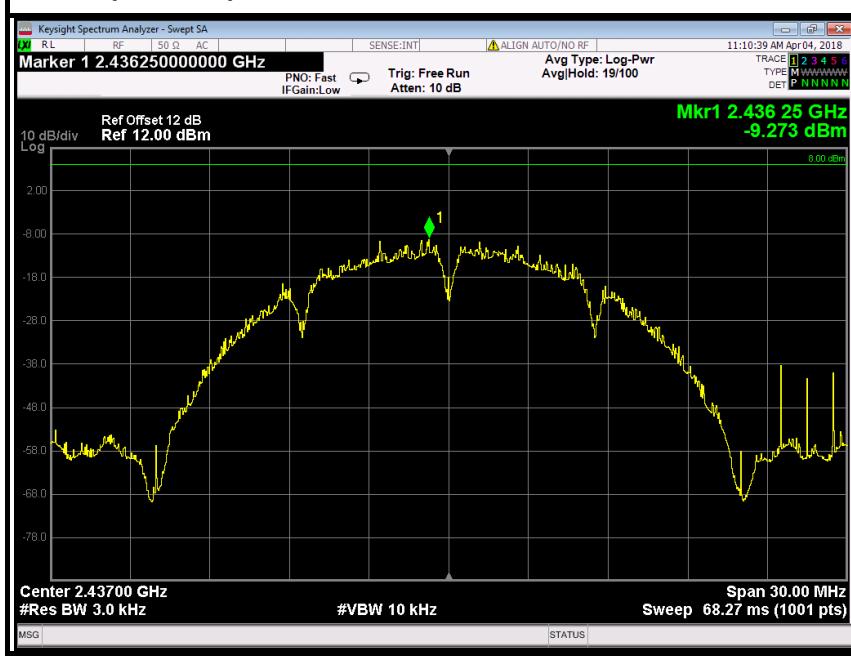




PPSD (CH High)




IEEE 802.11g mode

PPSD (CH Low)

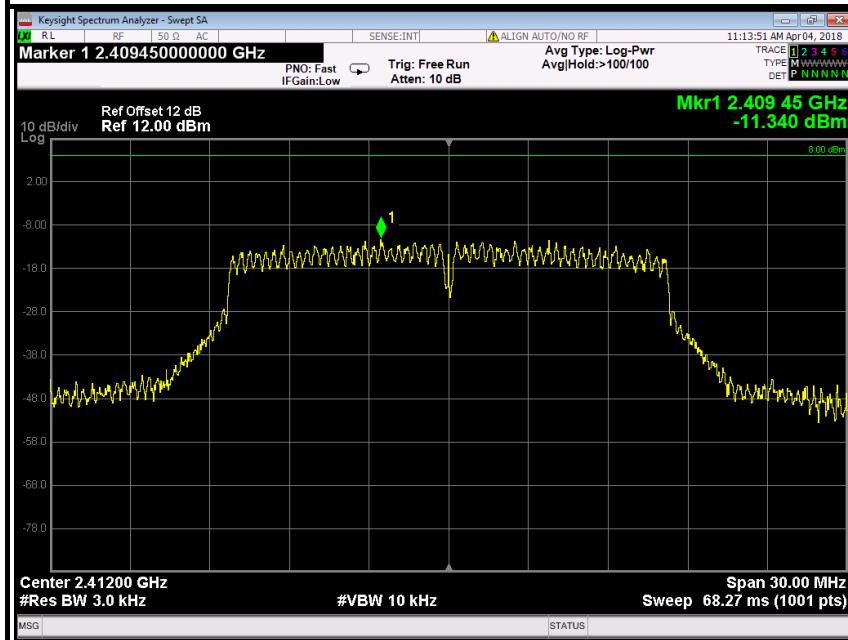




PPSD (CH Mid)

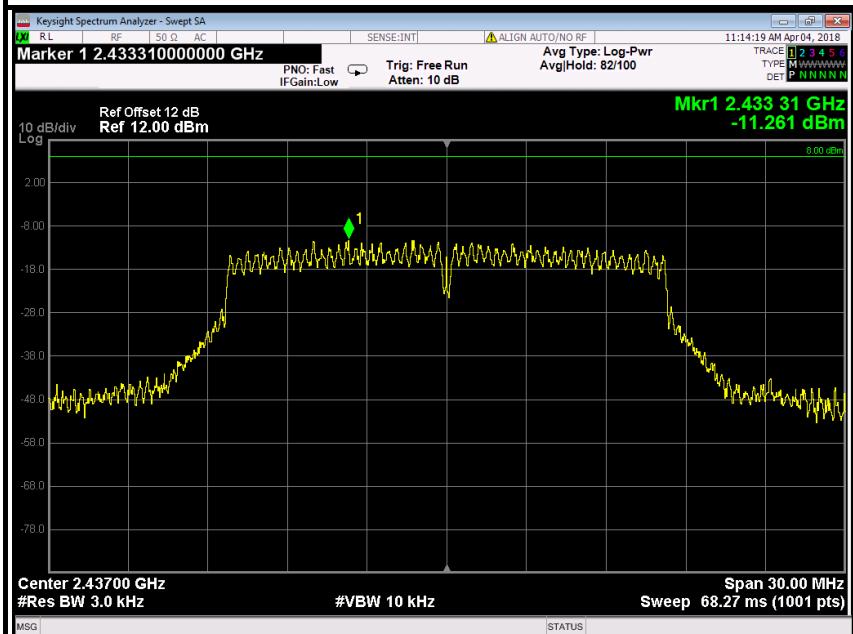


PPSD (CH High)

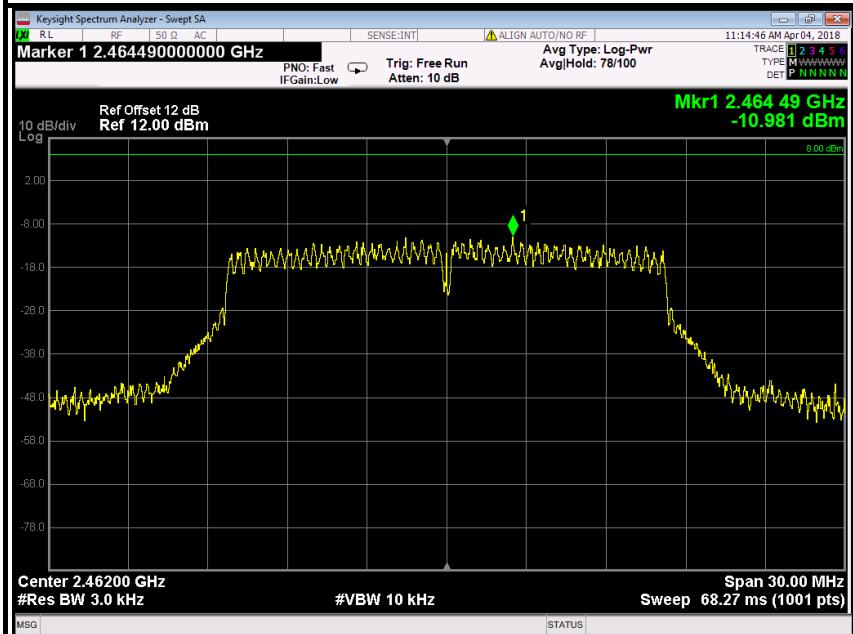






IEEE 802.11n HT20 MHz mode

PPSD (CH Low)

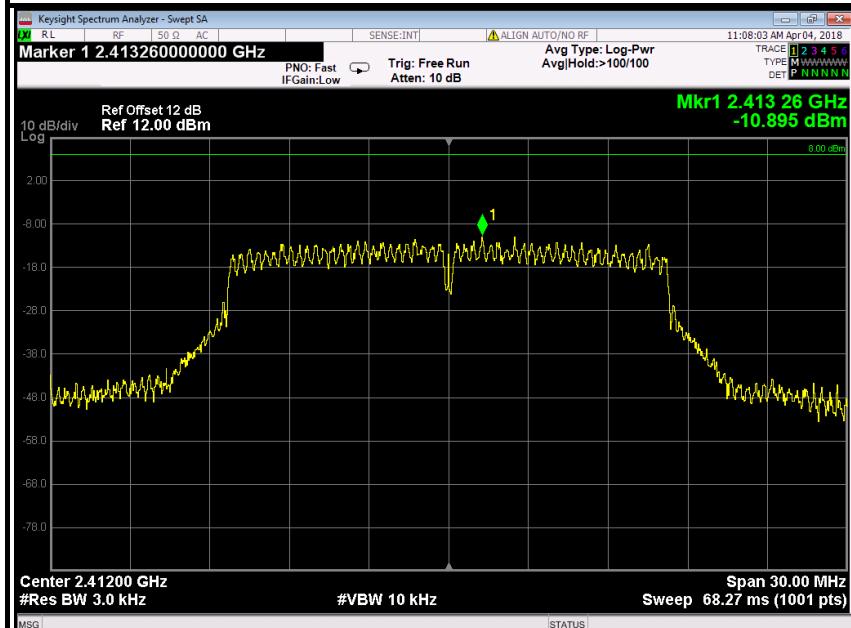


PPSD (CH Mid)

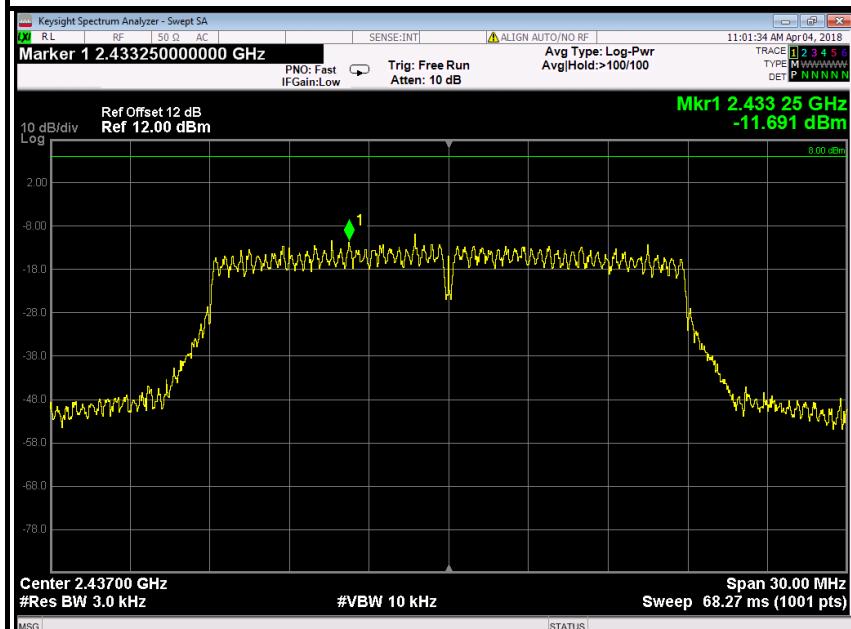

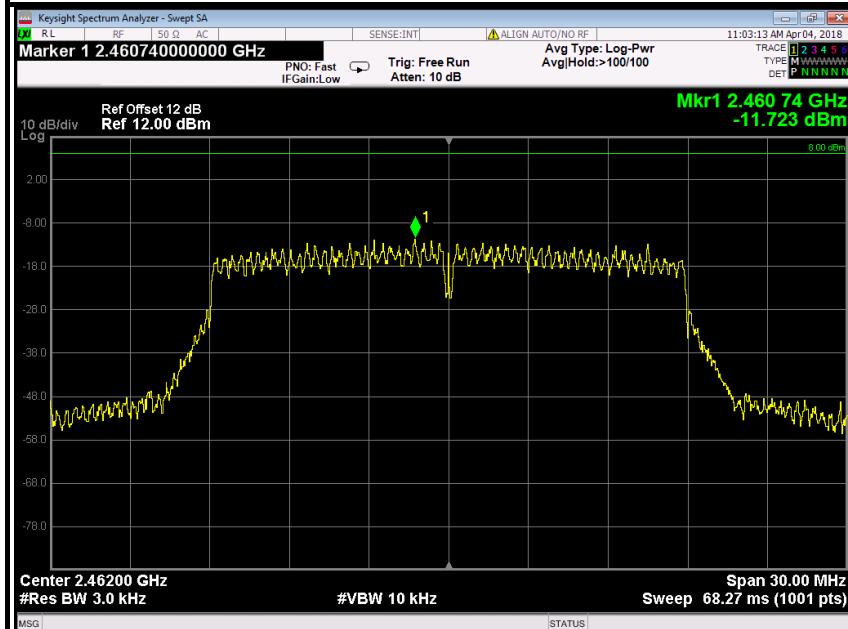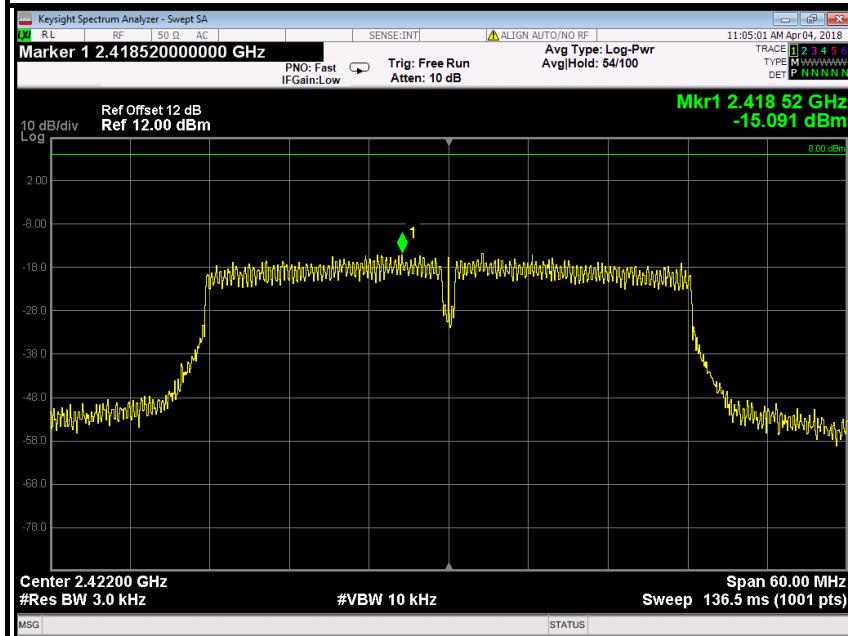**PPSD (CH High)****IEEE 802.11n HT40 MHz mode****PPSD (CH Low)**



PPSD (CH Mid)

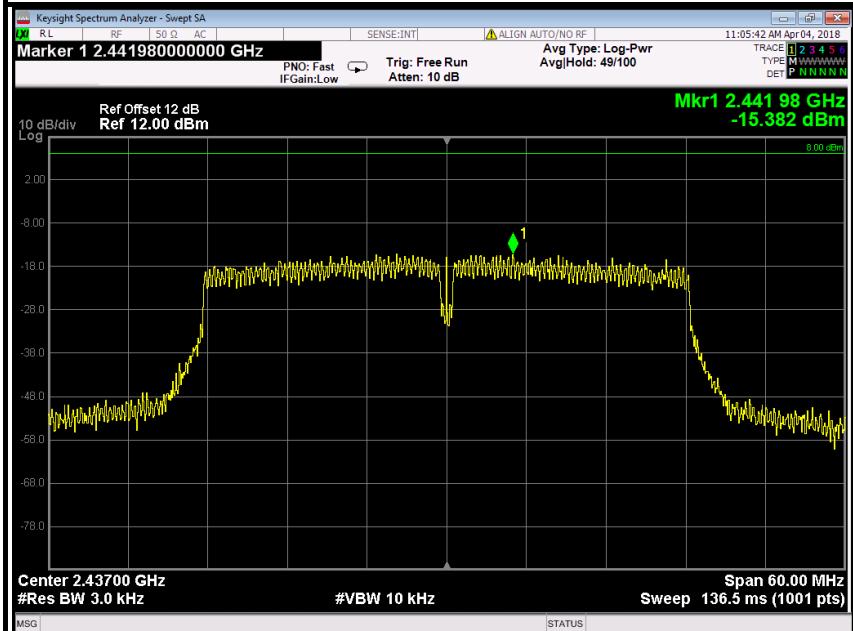

PPSD (CH High)

