

FCC CERTIFICATION TEST REPORT

Report No.: DDT-B21112204-1E05

Applicant	:	Acer Incorporated
Address	:	8F.,NO.88,Sec. 1, Xintai 5 th Rd., Xizhi, New Taipei City 22181, Taiwan (R.O.C)
Equipment under Test	:	Tablet Computer
Model No.	:	A8202
Trade Mark	:	
FCC ID	:	HLZA8202
Manufacturer	:	SIM Technology Group Shanghai Simcom Limited
Address	:	Building A,SIM Technology Building NO.633, Jinzhong Road.Changning District ,Shanghai P.R. China

Issued By: Tianjin Dongdian Testing Service Co., Ltd.

Address: Building D-1, No. 19, Weisi Road, Microelectronics Industrial Park Development Area, Tianjin, China.

Tel: +86-22-58038033, E-mail: ddt@dgddi.com, <http://www.ddttest.com>



REPORT

TABLE OF CONTENTS

	Test report declares.....	3
1.	Summary of Test Results.....	5
2.	General Test Information	6
2.1.	Description of EUT	6
2.2.	Accessories of EUT	7
2.3.	Assistant equipment used for test.....	7
2.4.	Block diagram of EUT configuration for test.....	7
2.5.	Deviations of test standard	8
2.6.	Test environment conditions	9
2.7.	Test laboratory	9
2.8.	Measurement uncertainty	10
3.	Equipment Used During Test.....	11
4.	Maximum Output Power	12
4.1.	Re-Test statement.....	12
4.2.	Block diagram of test setup	12
4.3.	Limits	12
4.4.	Test procedure	12
4.5.	Test result.....	13
5.	Radiated Emission	15
5.1.	Block diagram of test setup	15
5.2.	Limit.....	16
5.3.	Test Procedure.....	17
5.4.	Test result.....	19
6.	Band Edge Compliance (Radiated Method).....	306
6.1.	Block diagram of test setup	306
6.2.	Limit.....	306
6.3.	Test Procedure.....	307
6.4.	Test result.....	307
7.	Appendixes	378
8.	Test Setup Photograph	379
8.1.	Test setup of Tianjin Dongdian Testing Service Co., Ltd.....	379
8.2.	Test setup of SGS-CSTC Standards Technical Services,Co.,Ltd.Shenzhen Branch	
	381	

Test Report Declare

Applicant	:	Acer Incorporated
Address	:	8F.,NO.88,Sec. 1, Xintai 5 th Rd., Xizhi, New Taipei City 22181, Taiwan (R.O.C)
Equipment under Test	:	Tablet Computer
Model No.	:	A8202
Trade Mark	:	
Manufacturer	:	SIM Technology Group Shanghai Simcom Limited
Address	:	Building A,SIM Technology Building NO.633, Jinzhong Road.Changning District ,Shanghai P.R. China

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart E.

Test Procedure Used:

ANSI C63.10:2013, 789033 D02 General U-NII Test Procedures New Rules v02r01

We Declare:

The equipment described above is tested by Tianjin Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Tianjin Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.

Report No.:	DDT-B21112204-1E05		
Date of Receipt:	Nov. 22, 2021	Date of Test:	Nov. 22, 2021 ~ Dec. 09, 2021

Prepared By:

Sunny Zhang

Sunny Zhang/Engineer

Approved By:

Aaron Zhang

Aaron Zhang/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Tianjin Dongdian Testing Service Co., Ltd.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.



Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Dec. 09, 2021	

1. Summary of Test Results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Verdict
6/26db Bandwidth and 99% Bandwidth	FCC 15.407 (e) ANSI C63.10:2013	Pass ¹
Maximum Conducted Output Power	FCC 15.407 (a) ANSI C63.10:2013	Pass ²
Power Spectral Density	FCC 15.407 (a) ANSI C63.10:2013	Pass ¹
Frequency Stability Measurement	FCC 15.407 (g) ANSI C63.10:2013	Pass ¹
RF Conducted Spurious Emissions	FCC 15.407 (a) ANSI C63.10:2013	Pass ¹
Band Edge Compliance (conducted method)	FCC 15.407 (a) ANSI C63.10:2013	Pass ¹
Emissions in restricted frequency bands	FCC 15.407 (a) FCC 15.209 FCC 15.205 ANSI C63.10:2013	Pass ²
Radiated Emission	FCC 15.407 (a) FCC 15.209 FCC 15.205 ANSI C63.10:2013	Pass ²
Power Line Conducted Emission	FCC 15.207 ANSI C63.10:2013	Pass ¹
Dynamic Frequency Selection	FCC 15.407 (h) ANSI C63.10:2013	Pass ¹
Note1: The above "pass¹" items data are refer from the original report issued by SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch (Date of Test: 2019/7/3 ~ 2019/7/20), The detailed data can refer to Appendix-5GWIFI. Note2: The above "pass²" item is tested by Tianjin Dongdian Testing Service Co., Ltd.		

2. General Test Information

2.1. Description of EUT

EUT* Name	: Tablet Computer
Model Number	: A8202
EUT Function Description	: Please reference user manual of this device
Power Supply	: DC 3.8V Polymer Li-ion built-in battery : DC 5V by AC/DC Adapter
Radio Specification	: IEEE 802.11a/n/ac
Operation Frequency	: IEEE 802.11a: 5180MHz-5240MHz, 5260MHz-5320MHz, 5500MHz-5700MHz, 5745MHz-5825MHz IEEE 802.11n HT20: 5180MHz-5240MHz, 5260MHz-5320MHz, 5500MHz-5700MHz, 5745MHz-5825MHz IEEE 802.11n HT40: 5190MHz-5230MHz, 5270MHz-5310MHz, 5510MHz-5670MHz, 5755MHz-5755MHz IEEE 802.11ac HT20: 5180MHz-5240MHz, 5260MHz-5320MHz, 5500MHz-5700MHz, 5745MHz-5825MHz IEEE 802.11ac HT40: 5190MHz-5230MHz, 5270MHz-5310MHz, 5510MHz-5670MHz, 5755MHz-5755MHz IEEE 802.11ac HT80: 5210MHz, 5290MHz, 5530MHz, 5610MHz, 5775MHz
Modulation	: IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
Data Rate	: IEEE 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n HT20: MCS8~MCS15 IEEE 802.11n HT40: MCS8~MCS15 IEEE 802.11ac VHT20: MCS0~MCS9 IEEE 802.11ac VHT40: MCS0~MCS9 IEEE 802.11ac VHT80: MCS0~MCS9
Antenna Type	: Ant1: Integrated antenna, maximum PK gain: -2.38 dBi : Ant2: Integrated antenna, maximum PK gain: -2.38 dBi
Sample Type	: Portable Device

Note: EUT is the ab. of equipment under test.


2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Description	SN
N/A	N/A	N/A	N/A	N/A

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
N/A	N/A	N/A	N/A	N/A

2.4. Block diagram of EUT configuration for test



Test software: QRCT.EXE

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

Test Channel information

Mode	Channel	Frequency (MHz)
For UNII Band I:		
IEEE 802.11a/n/ac 20MHz	Low Channel	5180
	Middle Channel	5200
	High Channel	5240
IEEE 802.11n/ac 40MHz	Low Channel	5190
	High Channel	5230
IEEE 802.11ac 80MHz	Middle Channel	5210
For UNII Band II-A:		
IEEE 802.11a/n/ac 20MHz	Low Channel	5260
	Middle Channel	5280
	High Channel	5320
IEEE 802.11n/ac 40MHz	Low Channel	5270
	High Channel	5310
IEEE 802.11ac 80MHz	Middle Channel	5290
For UNII Band II-C:		
IEEE 802.11a/n/ac 20MHz	Low Channel	5500
	Middle Channel	5580
	High Channel	5700
IEEE 802.11n/ac 40MHz	Low Channel	5510

IEEE 802.11ac 80MHz	Middle Channel	5550
	High Channel	5670
	Low Channel	5530
	High Channel	5610
For UNII Band III:		
IEEE 802.11a/n/ac 20MHz	Low Channel	5745
	Middle Channel	5785
	High Channel	5825
IEEE 802.11n/ac 40MHz	Low Channel	5755
	High Channel	5795
IEEE 802.11ac 80MHz	Middle Channel	5775

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	25-75%
Pressure range:	86-106 kPa

2.7. Test laboratory

Tianjin Dongdian Testing Service Co., Ltd.

Address: Building D-1, No. 19, Weisi Road, Microelectronics Industrial Park Development Area, Tianjin, China.

Tel: +86-22-58038033, <http://www.ddttest.com>, Email: ddt@dgddt.com

NVLAP (National Voluntary Laboratory Accreditation Program) CODE: 500036-0

CNAS (China National Accreditation Service for Conformity Assessment) CODE: L13402

FCC Designation Number: CN5004; FCC Test Firm Registration Number: 368676

ISED (Innovation, Science and Economic Development Canada) Company Number: 27768

Conformity Assessment Body Identifier: CN0125

VCCI Facility Registration Number: C-20089, T-20093, R-20125, G-20122

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	0.14%
Peak Output Power (Conducted) (Spectrum Analyzer)	0.12 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	0.32 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.51 dB
Power Spectral Density	0.12 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	0.32 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method)
	3.4×10^{-8} (Conducted method)
Conducted Spurious Emissions	0.12 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	0.32 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
	0.52 dB ($8 \text{ GHz} \leq f < 22 \text{ GHz}$)
Uncertainty for Radio Frequency (RBW < 20 kHz)	3×10^{-7}
Temperature	$\pm 2^{\circ}\text{C}$
Humidity	$\pm 1\%$
Uncertainty for Radiation Emission Test (30 MHz - 1 GHz)	2.72 dB (Antenna Polarize: V)
	2.72 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission Test (1 GHz - 40 GHz)	2.74 dB (1 - 6 GHz)
	2.72 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power Line Conduction Emission Test	3.40 dB (150 kHz - 30 MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Test


Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
RF Connected Test (MWRFTest system)					
Microwave Signal Generator	R&S	SMF100A	101396	2021/06/08	1 Year
MXG Vector Signal Generator	Agilent	N5182A	MY50143288	2021/03/08	1 Year
EMI Test Receiver	R&S	ESU26	100243	2021/03/03	1 Year
Wideband Radio Communication Tester	R&S	CMW500	158800	2021/05/25	1 Year
Power Detector	MWRFTest	MW100-PS B	MW201203008	2021/03/31	1 Year
DC Power Supply	inSTEK	PSP-2010	EH131319	2021/02/27	1 Year
Test Software	MWRFTest	MTS8310	V03	N/A	N/A
Radiated Emission -10m EMI Chamber					
EXA Signal Analyzer	Keysight	N9010A	MY53281492	2021/03/31	1 Year
Active Loop Antenna	R&S	HFH2-Z2	100269	2021/05/08	1 Year
Double-Ridged Guide Horn Antenna	ETS-LINDGR EN	3115	00102808	2021/03/16	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	2021/04/21	1 Year
Broadband Horn Antenna	TESEQ	BHA 9118	31754	2021/10/12	1 Year
Low noise amplifier	MITEQ	TPA0118-36	0914	2021/02/03	1 Year
EMI Test Receiver	R&S	ESCI	101024	2021/03/03	1 Year
EMI Test Receiver	R&S	ESCI	101030	2021/05/15	1 Year
Bilog Antenna	TESEQ	CBL6112D	29068	2020/10/12	2 Year
Bilog Antenna	TESEQ	CBL6112D	29069	2020/10/12	2 Year
Amplifier	Sonoma	310N	300913	2021/03/03	1 Year
Amplifier	Sonoma	310N	300914	2021/03/03	1 Year
Ant Mast	Innco	MA4000	N/A	N/A	N/A
Ant Mast	Innco	MA4000	N/A	N/A	N/A
Mast Controller	Innco	CO2000	N/A	N/A	N/A
Mast Controller	Innco	CO2000	N/A	N/A	N/A
RF Selector 4CH	TOYO	NS4904N	Selector1	N/A	N/A
RF Selector 4CH	TOYO	NS4904N	Selector2	N/A	N/A
Test software	TOYO	EP5/RSE	Ver 1.9.1	N/A	N/A
Test software	Audix	E3	V 6.11111b	N/A	N/A
Power Line Conducted Emissions Test					
Test Receiver	R&S	ESCI	101397	2021/03/03	1 Year
LISN	R&S	ENV216	101122	2021/03/31	1 Year
Test software	TOYO	EP5/CE	V 5.4.40	N/A	N/A

4. Maximum Output Power

4.1. Re-Test statement

The EUT is operating at the same power level with the original testing of SGS-CSTC Standards Technical Services, Co., Ltd. Shenzhen Branch.

4.2. Block diagram of test setup



4.3. Limits

FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	For FCC client devices: 250 mW (24 dBm)	5150-5250
	For FCC: 250 mW (24 dBm) or $11 + 10 \log_{10} B$	5250-5350
	For FCC: 250 mW (24 dBm) or $11 + 10 \log_{10} B$	For FCC: 5470 - 5725
	1 Watt (30 dBm)	5725-5850
Note 1: B=26 bandwidth. Note 2: For 802.11n and 802.11ac, the EUT incorporates a MIMO function. The Antenna directional gain is less than 6 dBi.		

4.4. Test procedure

Connect each EUT's antenna output to power sensor by RF cable and attenuator.
 Measure the PK output power of each antenna port by power sensor.

4.5. Test result

Remark:

	The Original Reports	Re-Test Reports
File name:	test report 5G WLAN	DDT-B21112204-1E05
Test location:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch	Tianjin Dongdian Testing Service Co., Ltd.

Power:


Mode	Test Channel	Frequency [MHz]	The Original Reports Level [dBm]			Re-Test Reports Level [dBm]		
			ANT 1	ANT 2	SUM	ANT 1	ANT 2	SUM
11a20	36	5180	10.5	10.53	---	10.27	10.12	---
	48	5240	10.29	10.58	---	10.34	10.31	---
	52	5260	10.09	10.83	---	10.12	10.57	---
	64	5320	8.99	11.27	---	8.79	11.06	---
	100	5500	8.59	12.54	---	8.25	12.18	---
	140	5700	7.33	9.84	---	7.04	9.79	---
	149	5745	7.41	9.86	---	7.53	9.72	---
	165	5825	7.48	9.24	---	7.22	8.95	---
11n20 MIMO	36	5180	10.63	7.6	12.38	10.57	7.71	12.38
	48	5240	10.42	7.68	12.27	10.37	7.61	12.22
	52	5260	10.22	7.94	12.24	10.46	7.87	12.37
	64	5320	9.05	8.32	11.71	9.14	8.14	11.68
	100	5500	8.85	9.72	12.32	8.79	9.53	12.19
	140	5700	7.48	6.9	10.21	7.19	6.88	10.05
	149	5745	7.53	6.82	10.20	7.67	6.72	10.23
	165	5825	7.61	6.15	9.95	7.39	6.57	10.01
11n40 MIMO	38	5190	11.55	8.38	13.26	11.33	8.17	13.04
	46	5230	11.48	8.55	13.27	11.09	8.47	12.98
	54	5270	11.08	8.79	13.09	11.25	8.66	13.16
	62	5310	10.36	9.03	12.76	10.25	9.17	12.75
	102	5510	9.71	10.5	13.13	9.64	10.03	12.85
	134	5670	8.32	8.01	11.18	8.47	8.15	11.32
	151	5755	8.44	7.44	10.98	8.52	7.29	10.96

	159	5795	8.19	7.26	10.76	8.31	7.41	10.89
11ac20 MIMO	36	5180	11.14	8.47	13.02	11.22	8.78	13.18
	48	5240	11.09	8.12	12.86	11.25	8.36	13.05
	52	5260	10.82	8.58	12.85	10.77	8.67	12.86
	64	5320	9.57	8.94	12.28	9.89	8.72	12.35
	100	5500	9.36	9.91	12.65	9.41	9.65	12.54
	140	5700	8.04	7.19	10.65	8.16	7.35	10.78
	149	5745	8.03	7.1	10.60	8.23	7.06	10.69
	165	5825	7.93	6.62	10.33	7.66	6.38	10.08
11ac40 MIMO	38	5190	10.98	7.99	12.75	10.98	7.99	12.75
	46	5230	10.91	7.92	12.68	10.73	7.83	12.53
	54	5270	10.58	8.22	12.57	10.88	8.54	12.88
	62	5310	9.71	8.48	12.15	9.67	8.89	12.31
	102	5510	9.06	9.79	12.45	9.33	9.82	12.59
	134	5670	7.61	7.5	10.57	7.57	7.49	10.54
	151	5755	7.71	6.72	10.25	7.68	6.57	10.17
	159	5795	7.53	6.45	10.03	7.26	6.49	9.90
11ac80 MIMO	42	5210	10.07	6.71	11.72	10.14	6.58	11.73
	58	5290	9.14	7.32	11.33	9.25	7.48	11.46
	106	5530	7.87	8.32	11.11	7.65	8.46	11.08
	138	5690	6.39	5.92	9.17	6.58	5.47	9.07
	155	5775	6.65	5.6	9.17	6.24	5.71	8.99


5. Radiated Emission

5.1. Block diagram of test setup


Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

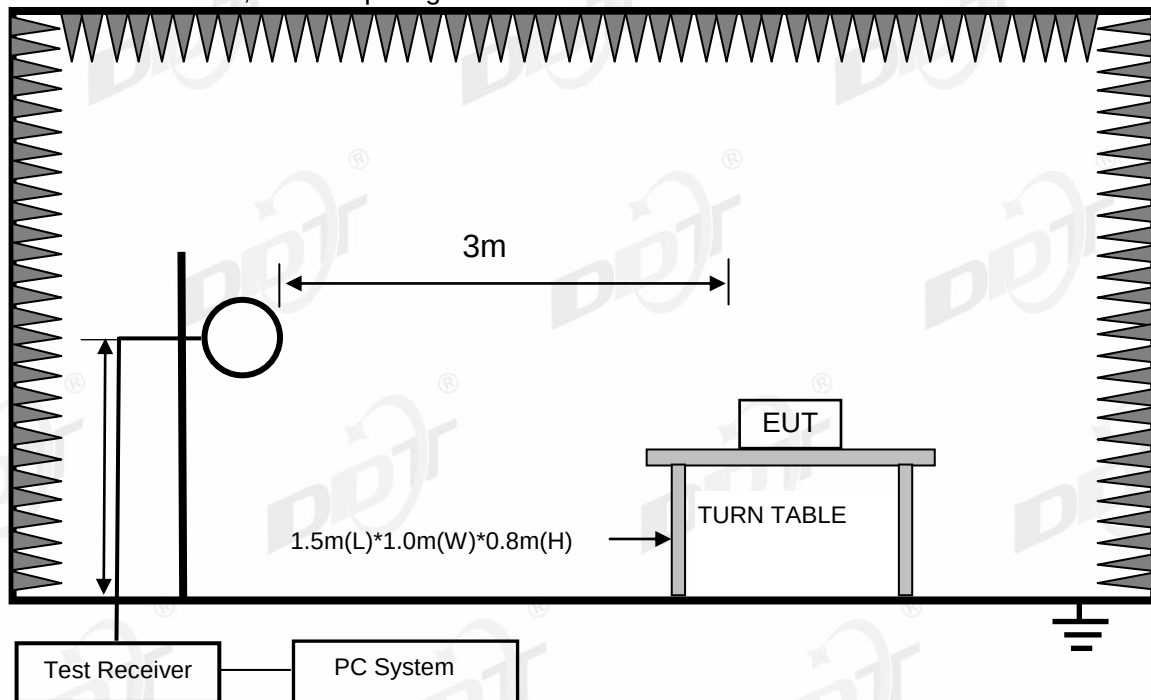

Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

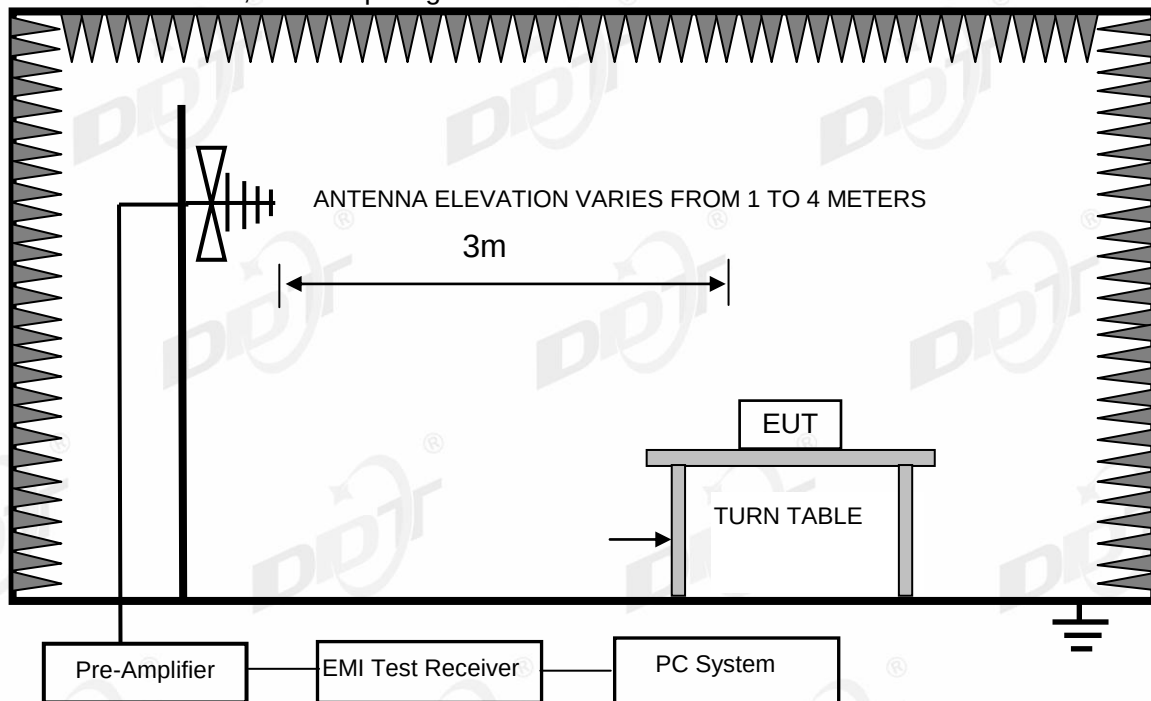

Anechoic Chamber, test setup diagram for frequency above 1 GHz:

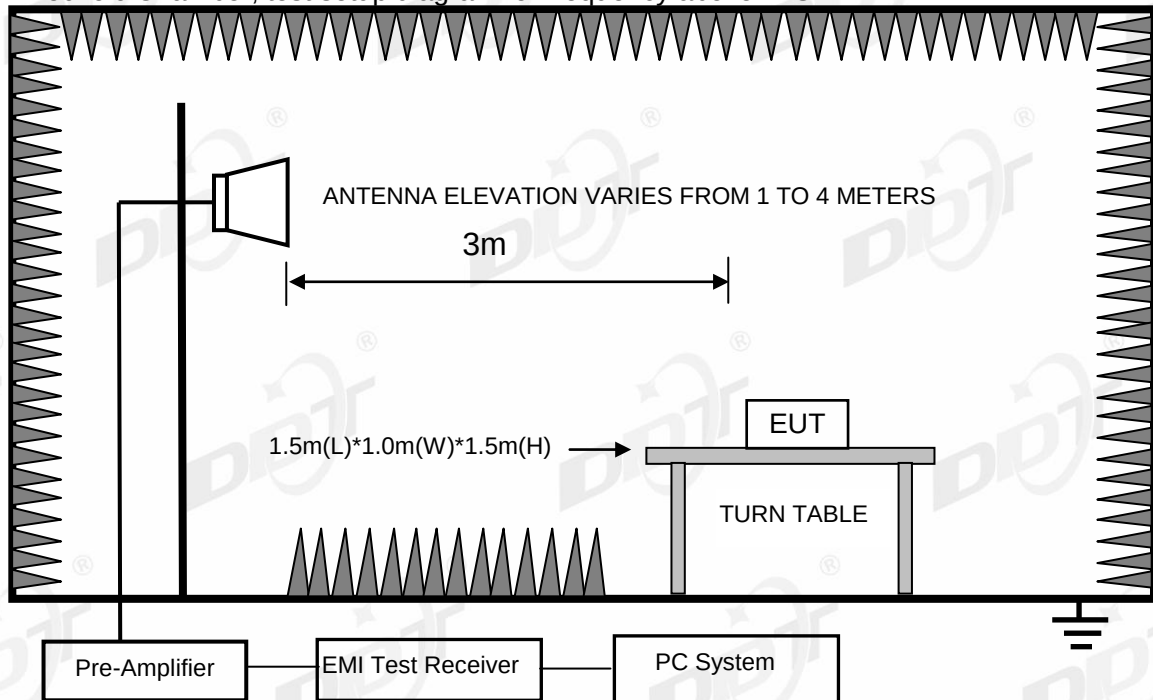

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

5.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

(2) FCC 15.209 Limit.

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(3) Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits.

5.3. Test Procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna (1 GHz - 18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna (18 GHz - 40 GHz)	3 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also

is positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. For measurement above 30 MHz, the trilog Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 40 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 40 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 9 kHz to 30 MHz and 18 GHz to 40 GHz, so below final test was performed with frequency range from 30 MHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure.

(8) X axis, Y axis, Z axis are tested, and worse setup X axis is reported.

5.4. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 40 GHz were comply with 15.209 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 40 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in transmitting and charging mode.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit. Scan with all modes, the worst case was recorded in this report.

Radiated Emission test (below 1 GHz)

Radiated Emission Test Result

Test Site : DDT 10m Chamber

Test Date : 12-03-2021

Tested By : Sunny


EUT : Tablet Computer

Model Number : A8202

Power Supply : AC 120V/60Hz

Test Mode : 5G WIFI + Charging

Data: 7

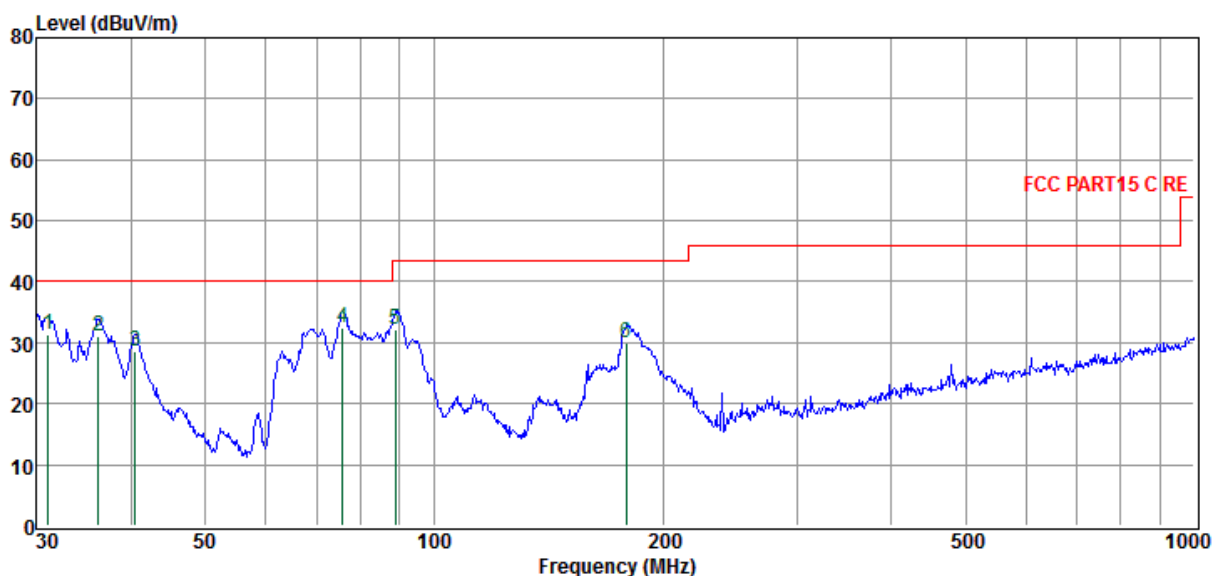

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Result Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Height (cm)	Angle (°)	Detector	Polarization
1	31.07	36.90	31.43	40.00	-8.57	135	60	QP	VERTICAL
2	36.13	39.45	30.94	40.00	-9.06	180	47	QP	VERTICAL
3	40.42	39.24	28.45	40.00	-11.55	248	318	QP	VERTICAL
4	75.71	48.75	32.31	40.00	-7.69	290	48	QP	VERTICAL
5	88.96	46.35	32.17	43.50	-11.33	391	236	QP	VERTICAL
6	178.76	42.20	30.02	43.50	-13.48	303	160	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. Margin QP (Quasi-Peak) = Level QP - Limit

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission Test Result

Test Site : DDT 10m Chamber

Test Date : 12-03-2021

Tested By : Sunny


EUT : Tablet Computer

Model Number : A8202

Power Supply : AC 120V/60Hz

Test Mode : 5G WIFI + Charging

Data: 8

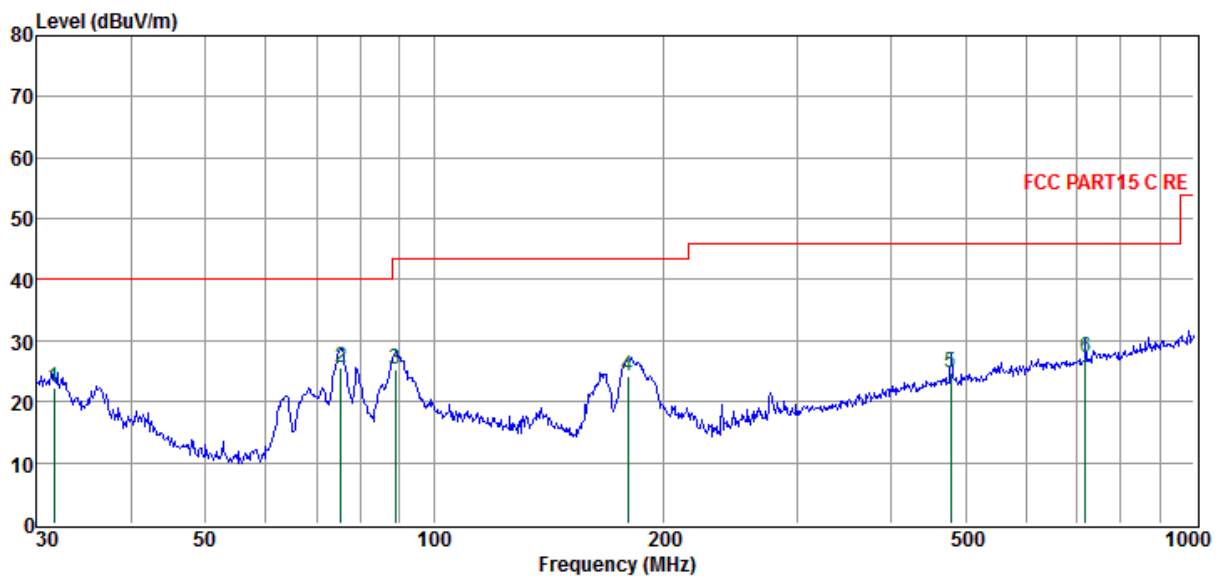

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (°)	Detector	Polarization
1	31.62	28.08	22.24	40.00	-17.76	159	151	QP	HORIZONTAL
2	75.45	42.10	25.62	40.00	-14.38	219	269	QP	HORIZONTAL
3	88.96	39.60	25.42	43.50	-18.08	144	224	QP	HORIZONTAL
4	180.02	36.48	24.24	43.50	-19.26	337	133	QP	HORIZONTAL
5	478.85	26.06	24.81	46.00	-21.19	261	146	QP	HORIZONTAL
6	719.20	24.80	27.21	46.00	-18.79	193	55	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. Margin QP (Quasi-Peak) = Level QP - Limit

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (1 GHz – 3 GHz)

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa Antenna/Distance : 3m/VERTICAL

Memo : 11A 6M ANT1 5180MHz

Data: 354

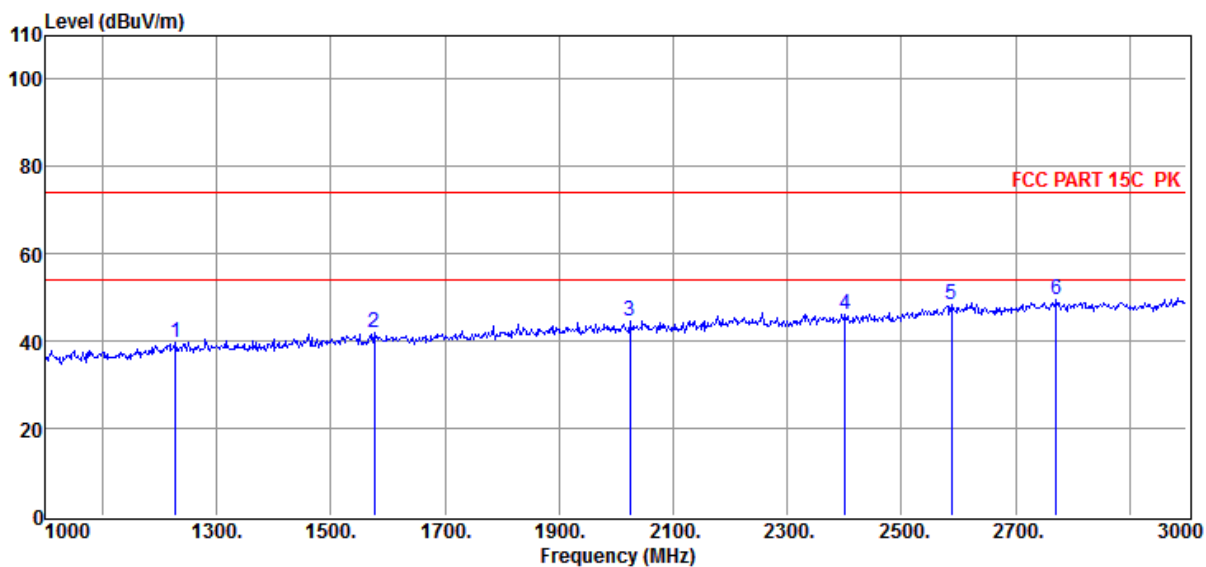

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1228.00	-4.99	39.72	74.00	-34.28	181	214	Peak	VERTICAL
2	1576.00	-2.37	41.86	74.00	-32.14	153	99	Peak	VERTICAL
3	2024.00	0.68	44.51	74.00	-29.49	156	281	Peak	VERTICAL
4	2402.00	3.33	46.21	74.00	-27.79	155	184	Peak	VERTICAL
5	2588.00	5.64	48.37	74.00	-25.63	188	256	Peak	VERTICAL
6	2772.00	6.54	49.37	74.00	-24.63	160	120	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5180MHz

Data: 355

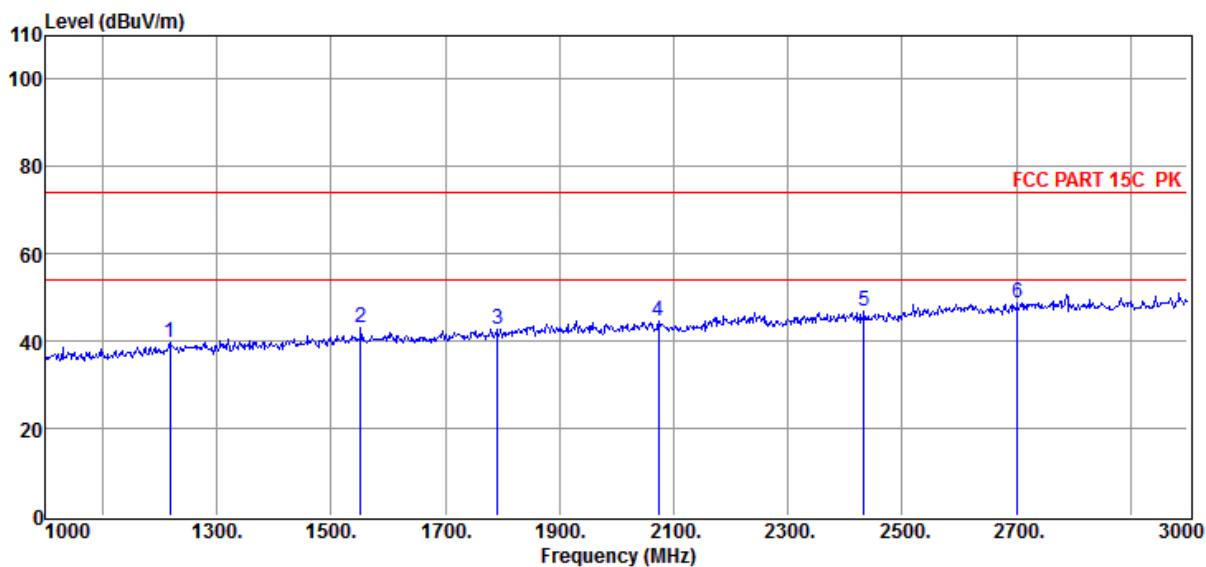

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1218.00	-5.11	39.79	74.00	-34.21	166	7	Peak	HORIZONTAL
2	1552.00	-2.45	43.07	74.00	-30.93	170	161	Peak	HORIZONTAL
3	1792.00	-1.18	42.74	74.00	-31.26	187	26	Peak	HORIZONTAL
4	2074.00	0.84	44.49	74.00	-29.51	155	322	Peak	HORIZONTAL
5	2434.00	3.30	46.83	74.00	-27.17	154	104	Peak	HORIZONTAL
6	2702.00	5.94	48.93	74.00	-25.07	160	170	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5200MHz

Data: 356

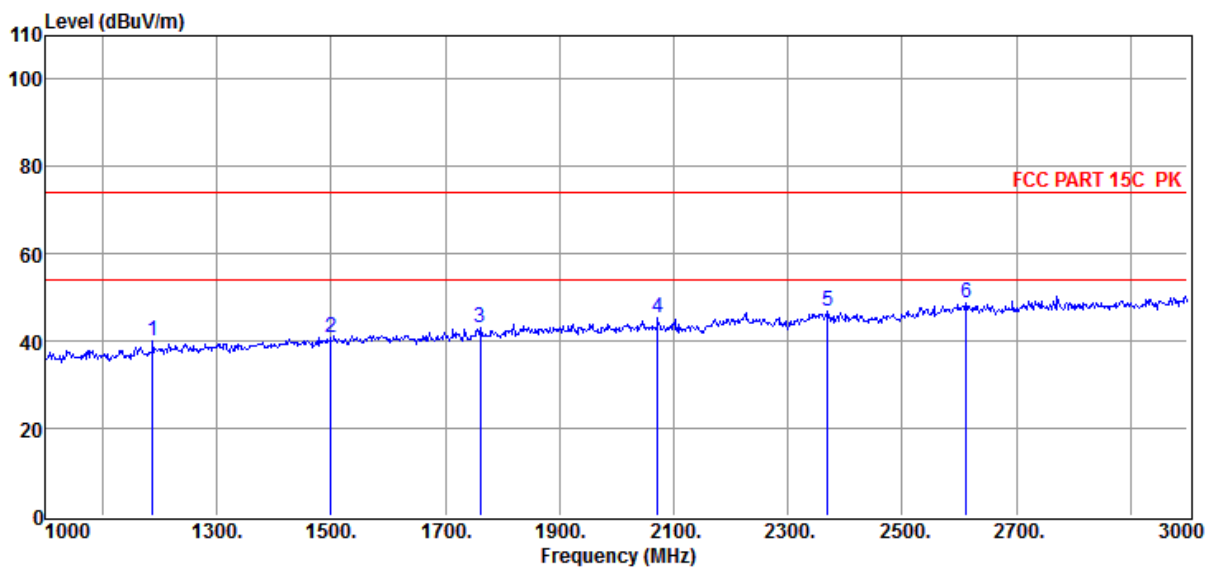

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1188.00	-5.56	39.91	74.00	-34.09	152	232	Peak	HORIZONTAL
2	1500.00	-2.95	40.94	74.00	-33.06	167	344	Peak	HORIZONTAL
3	1762.00	-1.37	43.11	74.00	-30.89	156	131	Peak	HORIZONTAL
4	2072.00	0.87	45.54	74.00	-28.46	170	85	Peak	HORIZONTAL
5	2370.00	3.25	46.72	74.00	-27.28	165	80	Peak	HORIZONTAL
6	2612.00	5.76	48.89	74.00	-25.11	163	223	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5200MHz

Data: 357

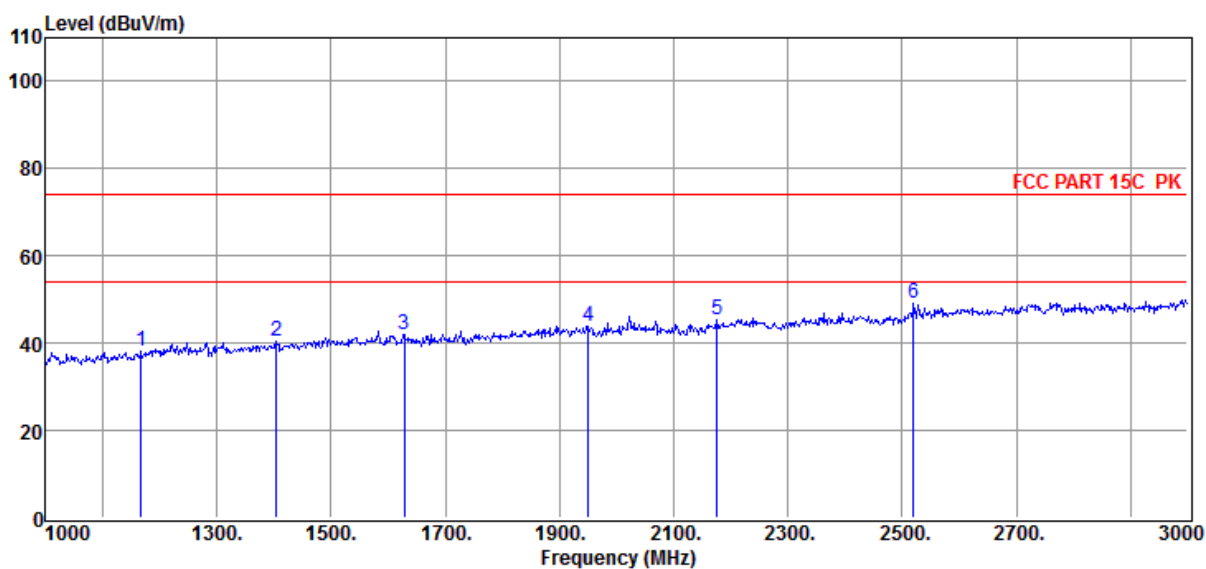

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1168.00	-5.96	38.27	74.00	-35.73	164	336	Peak	VERTICAL
2	1404.00	-4.05	40.54	74.00	-33.46	167	197	Peak	VERTICAL
3	1628.00	-2.32	42.07	74.00	-31.93	176	329	Peak	VERTICAL
4	1950.00	0.30	43.81	74.00	-30.19	181	209	Peak	VERTICAL
5	2176.00	1.78	45.26	74.00	-28.74	161	119	Peak	VERTICAL
6	2520.00	4.10	49.18	74.00	-24.82	169	255	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3'C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5240MHz

Data: 358

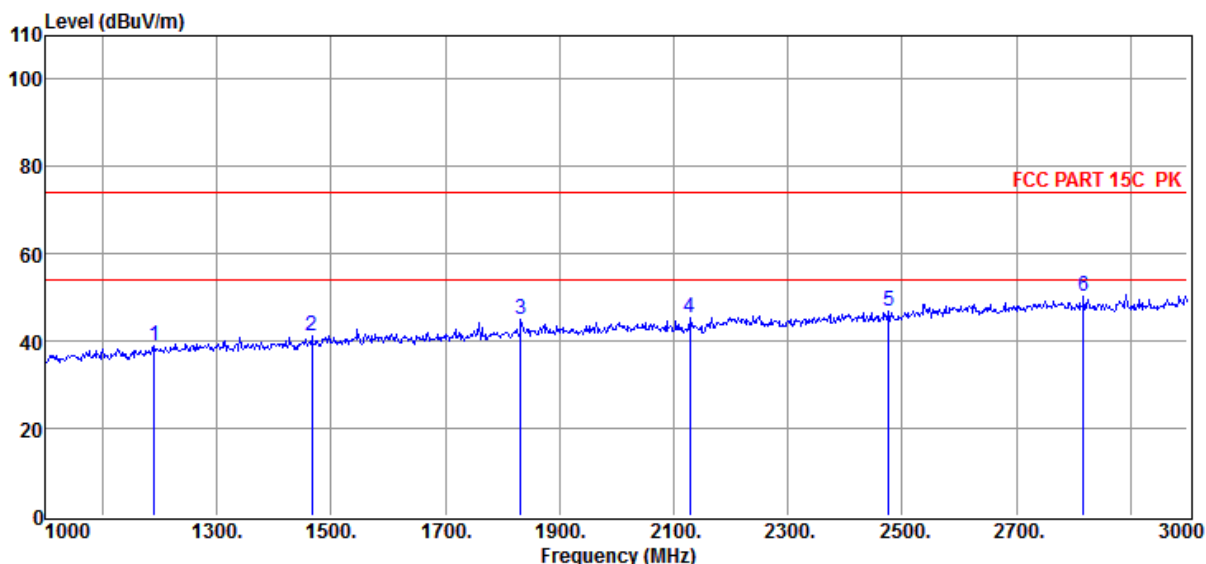

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1190.00	-5.52	38.92	74.00	-35.08	164	240	Peak	VERTICAL
2	1466.00	-3.31	41.21	74.00	-32.79	166	350	Peak	VERTICAL
3	1832.00	-0.62	44.95	74.00	-29.05	181	78	Peak	VERTICAL
4	2128.00	0.86	45.52	74.00	-28.48	154	331	Peak	VERTICAL
5	2476.00	3.48	46.75	74.00	-27.25	178	263	Peak	VERTICAL
6	2818.00	6.49	50.16	74.00	-23.84	163	92	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5240MHz

Data: 359

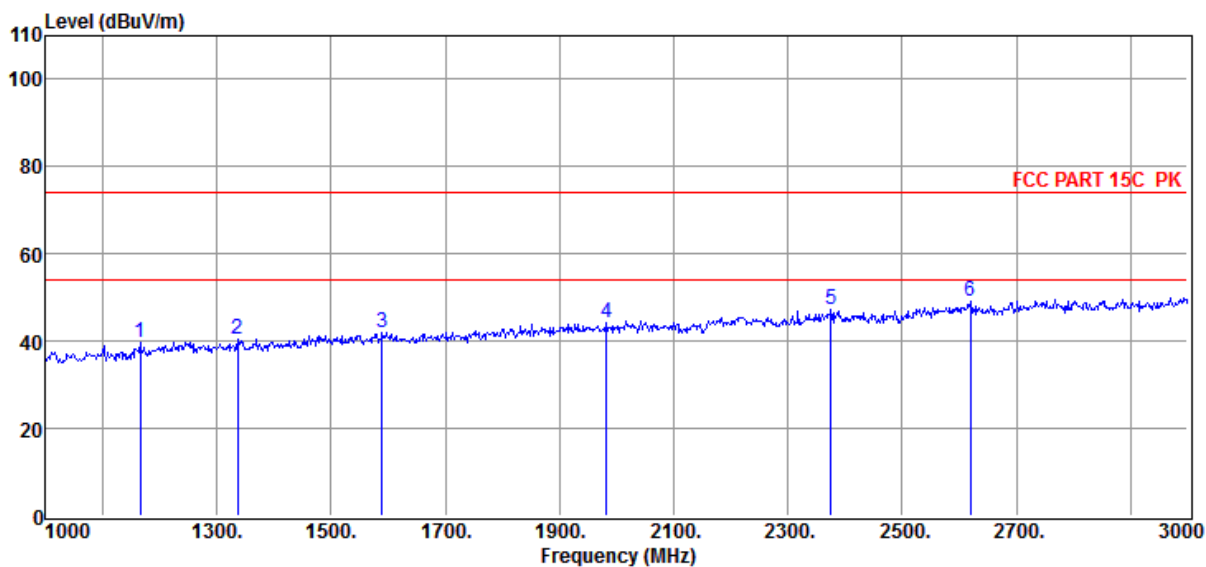

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1166.00	-6.00	39.57	74.00	-34.43	181	163	Peak	HORIZONTAL
2	1336.00	-4.46	40.45	74.00	-33.55	189	58	Peak	HORIZONTAL
3	1590.00	-2.32	41.90	74.00	-32.10	168	285	Peak	HORIZONTAL
4	1982.00	0.25	44.11	74.00	-29.89	166	68	Peak	HORIZONTAL
5	2376.00	3.26	47.44	74.00	-26.56	160	147	Peak	HORIZONTAL
6	2620.00	5.67	48.97	74.00	-25.03	180	135	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5260MHz

Data: 360

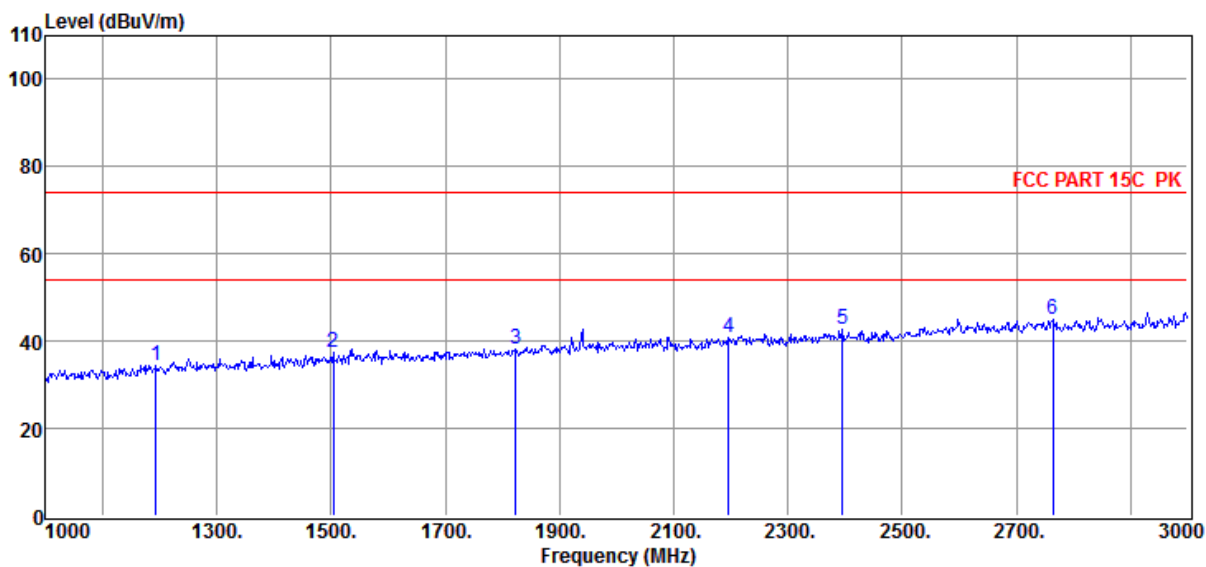

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1194.00	-5.44	34.53	74.00	-39.47	172	125	Peak	HORIZONTAL
2	1504.00	-2.91	37.29	74.00	-36.71	156	225	Peak	HORIZONTAL
3	1824.00	-0.75	38.37	74.00	-35.63	187	278	Peak	HORIZONTAL
4	2196.00	2.27	40.91	74.00	-33.09	190	40	Peak	HORIZONTAL
5	2396.00	3.32	42.68	74.00	-31.32	171	178	Peak	HORIZONTAL
6	2764.00	6.57	44.80	74.00	-29.20	150	302	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5260MHz

Data: 361

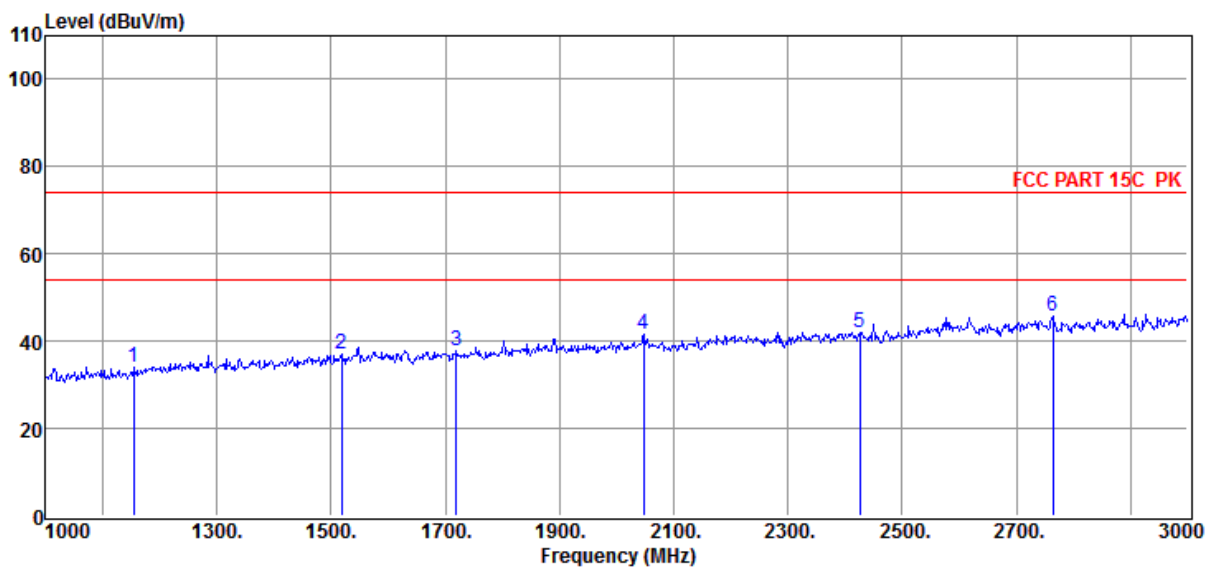

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1154.00	-6.24	34.05	74.00	-39.95	153	50	Peak	VERTICAL
2	1518.00	-2.77	37.00	74.00	-37.00	186	335	Peak	VERTICAL
3	1720.00	-1.76	37.64	74.00	-36.36	153	187	Peak	VERTICAL
4	2048.00	1.12	41.41	74.00	-32.59	155	333	Peak	VERTICAL
5	2426.00	3.31	42.10	74.00	-31.90	179	203	Peak	VERTICAL
6	2764.00	6.57	45.75	74.00	-28.25	154	177	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5280MHz

Data: 362

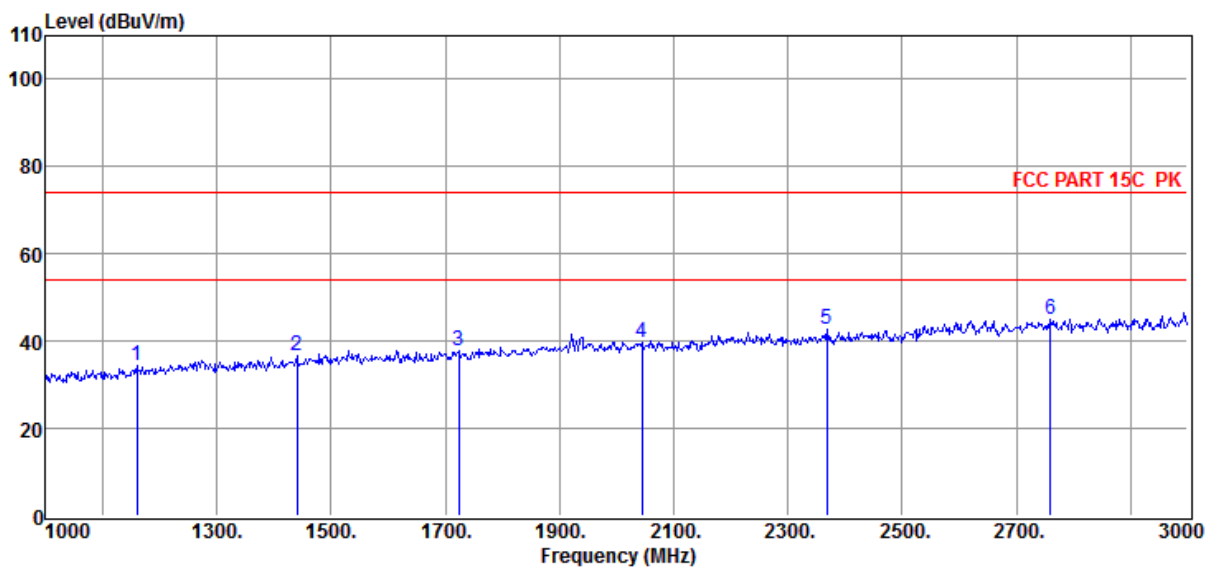

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1160.00	-6.12	34.30	74.00	-39.70	162	136	Peak	VERTICAL
2	1440.00	-3.60	36.78	74.00	-37.22	171	163	Peak	VERTICAL
3	1724.00	-1.72	37.77	74.00	-36.23	176	44	Peak	VERTICAL
4	2044.00	1.05	39.77	74.00	-34.23	155	336	Peak	VERTICAL
5	2368.00	3.24	42.71	74.00	-31.29	162	250	Peak	VERTICAL
6	2760.00	6.60	44.98	74.00	-29.02	158	97	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5280MHz

Data: 363

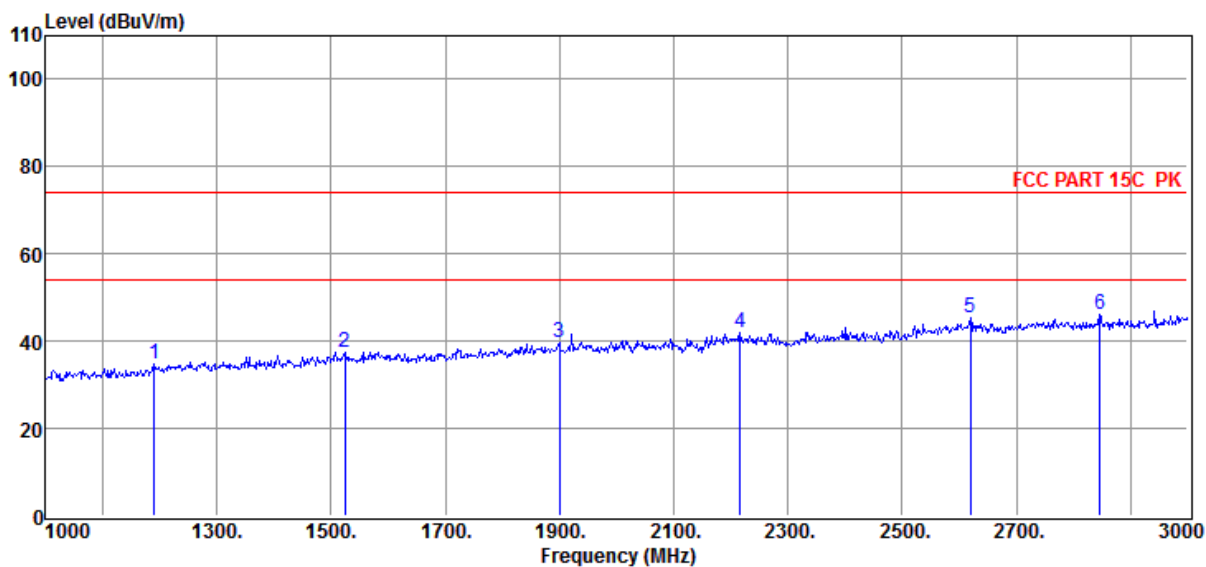

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1190.00	-5.52	34.63	74.00	-39.37	151	360	Peak	HORIZONTAL
2	1524.00	-2.72	37.59	74.00	-36.41	184	283	Peak	HORIZONTAL
3	1900.00	-0.07	39.65	74.00	-34.35	176	276	Peak	HORIZONTAL
4	2216.00	2.37	42.00	74.00	-32.00	174	162	Peak	HORIZONTAL
5	2620.00	5.67	45.33	74.00	-28.67	157	340	Peak	HORIZONTAL
6	2846.00	6.69	46.19	74.00	-27.81	169	218	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5320MHz

Data: 364

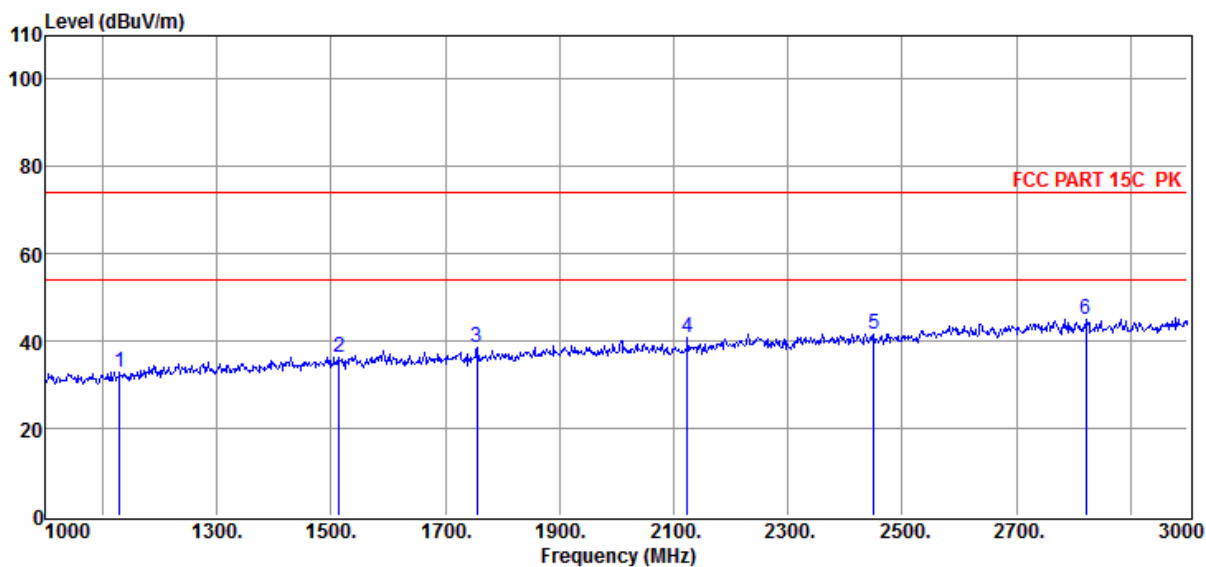

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1130.00	-6.49	32.98	74.00	-41.02	171	88	Peak	HORIZONTAL
2	1514.00	-2.82	36.37	74.00	-37.63	184	72	Peak	HORIZONTAL
3	1756.00	-1.40	38.49	74.00	-35.51	165	27	Peak	HORIZONTAL
4	2124.00	0.80	40.65	74.00	-33.35	151	27	Peak	HORIZONTAL
5	2450.00	3.29	41.64	74.00	-32.36	166	20	Peak	HORIZONTAL
6	2822.00	6.53	44.93	74.00	-29.07	169	315	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5320MHz

Data: 365

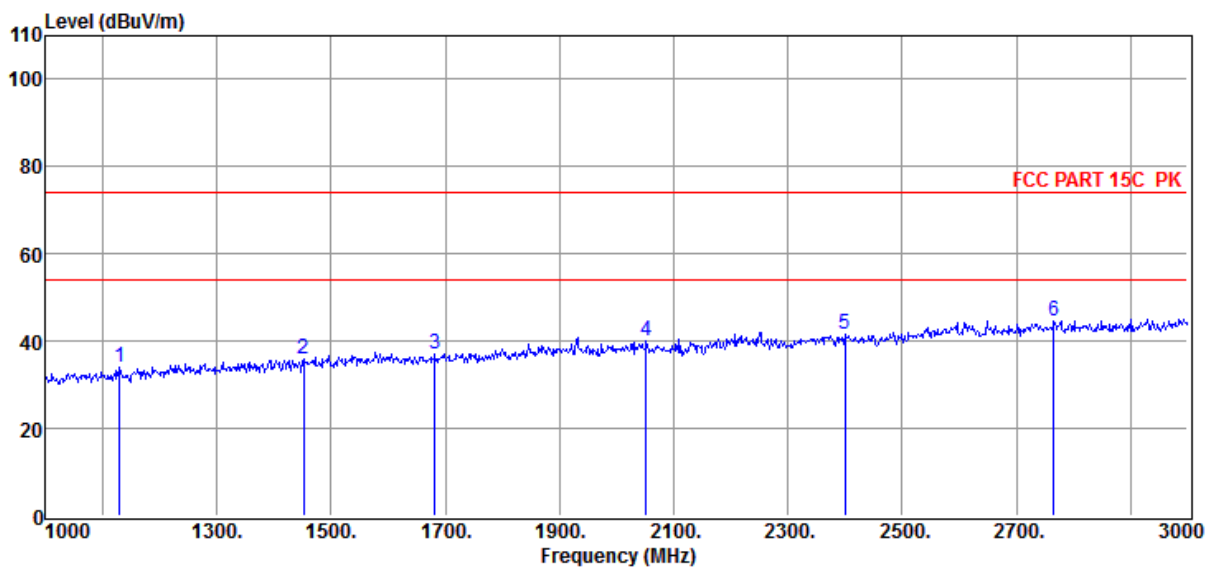

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1130.00	-6.49	33.94	74.00	-40.06	157	32	Peak	VERTICAL
2	1452.00	-3.46	35.79	74.00	-38.21	175	332	Peak	VERTICAL
3	1682.00	-2.11	37.16	74.00	-36.84	165	310	Peak	VERTICAL
4	2052.00	1.14	39.89	74.00	-34.11	158	105	Peak	VERTICAL
5	2400.00	3.33	41.41	74.00	-32.59	156	174	Peak	VERTICAL
6	2766.00	6.57	44.70	74.00	-29.30	160	67	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5500MHz

Data: 366

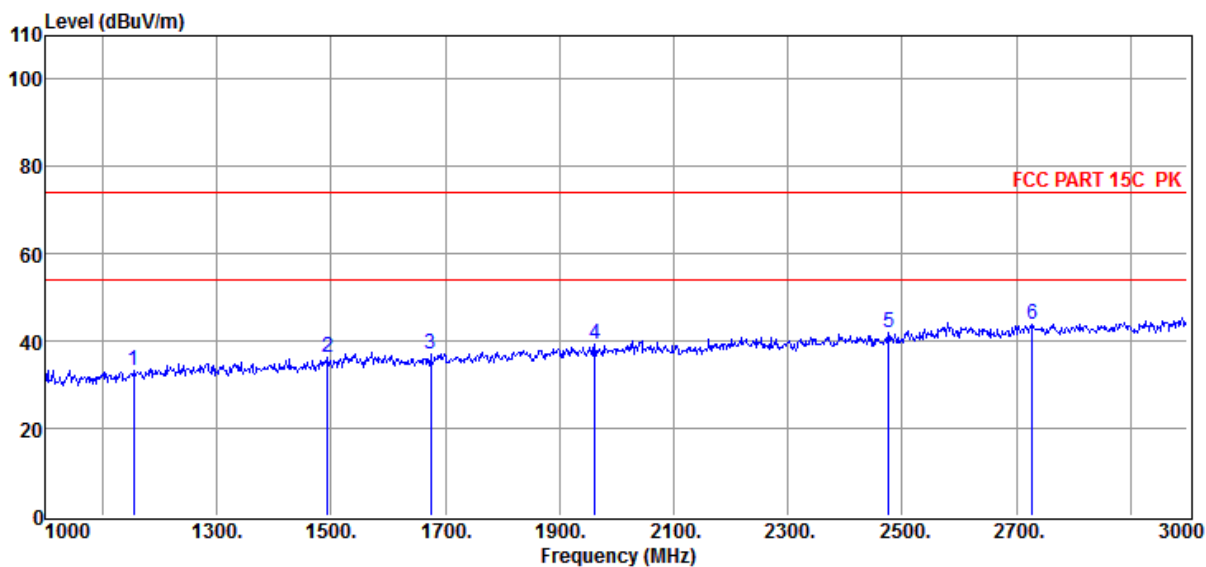

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1154.00	-6.24	33.32	74.00	-40.68	160	33	Peak	VERTICAL
2	1494.00	-3.01	36.19	74.00	-37.81	188	344	Peak	VERTICAL
3	1674.00	-2.17	37.20	74.00	-36.80	171	117	Peak	VERTICAL
4	1962.00	0.28	39.33	74.00	-34.67	168	45	Peak	VERTICAL
5	2476.00	3.48	42.08	74.00	-31.92	178	86	Peak	VERTICAL
6	2728.00	6.33	43.97	74.00	-30.03	189	118	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5500MHz

Data: 367

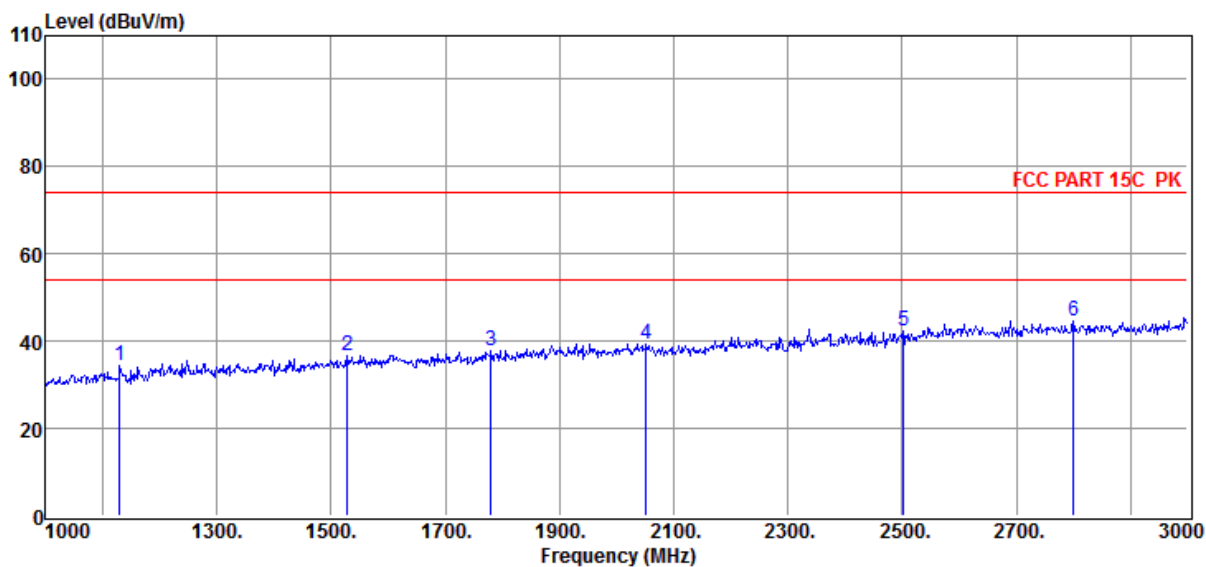

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1130.00	-6.49	34.25	74.00	-39.75	180	93	Peak	HORIZONTAL
2	1528.00	-2.67	36.66	74.00	-37.34	182	160	Peak	HORIZONTAL
3	1780.00	-1.25	37.89	74.00	-36.11	158	298	Peak	HORIZONTAL
4	2052.00	1.14	39.37	74.00	-34.63	173	75	Peak	HORIZONTAL
5	2502.00	3.68	42.35	74.00	-31.65	157	243	Peak	HORIZONTAL
6	2800.00	6.38	44.47	74.00	-29.53	184	335	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5580MHz

Data: 368

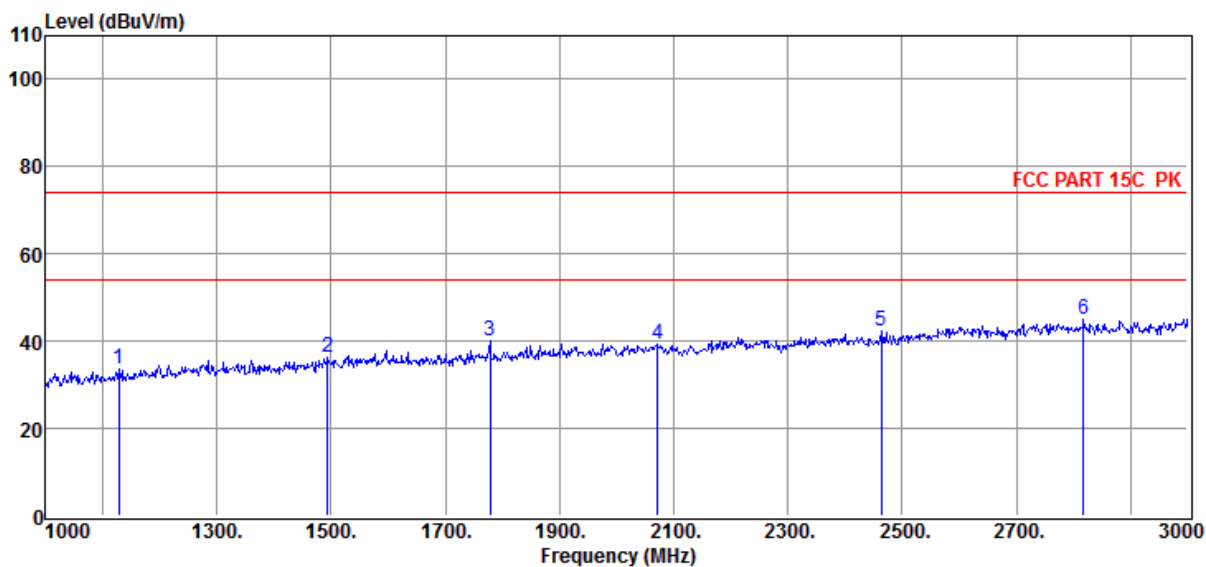

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1128.00	-6.51	33.49	74.00	-40.51	182	65	Peak	HORIZONTAL
2	1494.00	-3.01	36.46	74.00	-37.54	168	153	Peak	HORIZONTAL
3	1778.00	-1.26	40.13	74.00	-33.87	183	28	Peak	HORIZONTAL
4	2072.00	0.87	39.34	74.00	-34.66	183	59	Peak	HORIZONTAL
5	2464.00	3.38	42.19	74.00	-31.81	182	195	Peak	HORIZONTAL
6	2818.00	6.49	44.97	74.00	-29.03	159	338	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5580MHz

Data: 369

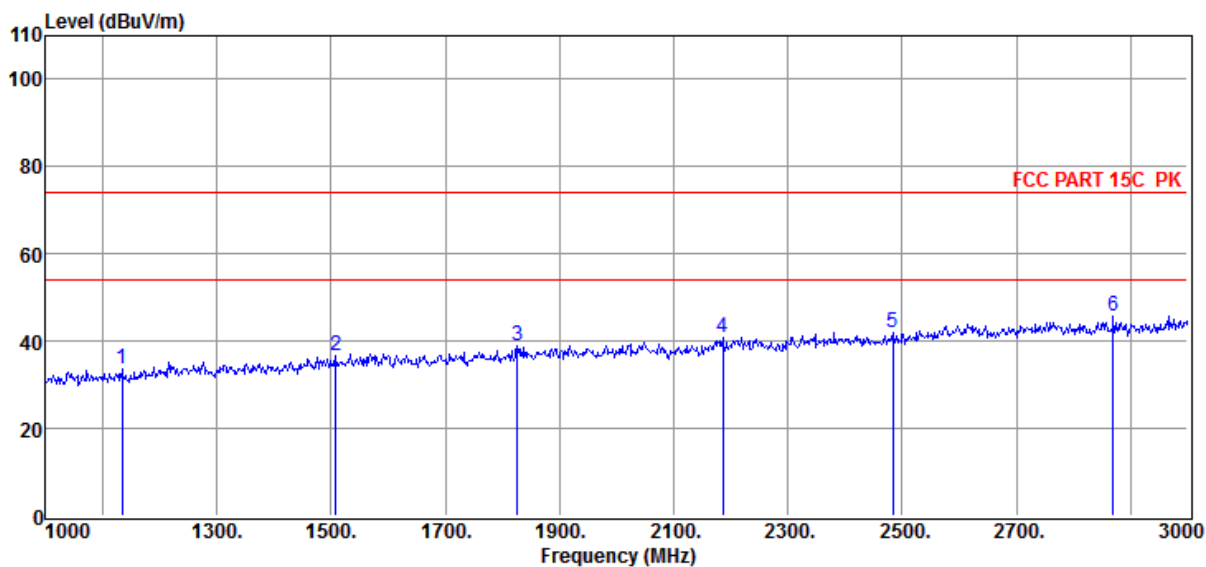

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1134.00	-6.46	33.69	74.00	-40.31	157	324	Peak	VERTICAL
2	1508.00	-2.87	36.56	74.00	-37.44	164	216	Peak	VERTICAL
3	1826.00	-0.71	38.93	74.00	-35.07	163	179	Peak	VERTICAL
4	2186.00	2.03	40.85	74.00	-33.15	160	26	Peak	VERTICAL
5	2484.00	3.52	41.90	74.00	-32.10	154	227	Peak	VERTICAL
6	2870.00	6.82	45.57	74.00	-28.43	186	220	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5700MHz

Data: 370

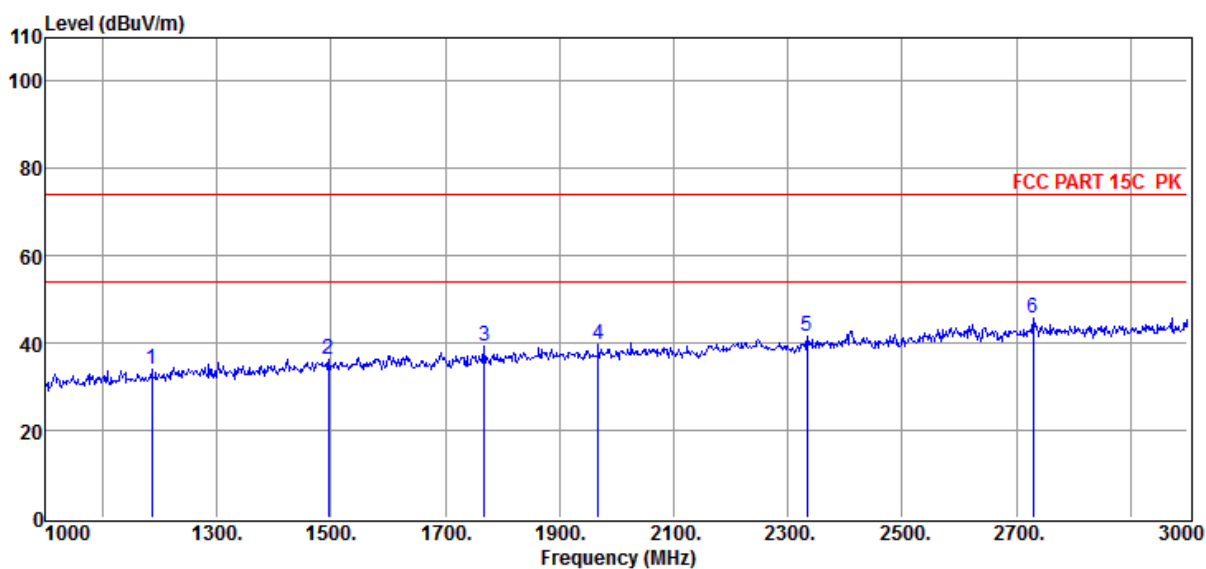

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1186.00	-5.60	33.94	74.00	-40.06	171	197	Peak	VERTICAL
2	1496.00	-2.99	36.11	74.00	-37.89	170	289	Peak	VERTICAL
3	1768.00	-1.33	39.42	74.00	-34.58	180	103	Peak	VERTICAL
4	1968.00	0.28	39.79	74.00	-34.21	162	7	Peak	VERTICAL
5	2334.00	2.78	41.76	74.00	-32.24	172	282	Peak	VERTICAL
6	2730.00	6.35	45.92	74.00	-28.08	187	59	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5700MHz

Data: 371

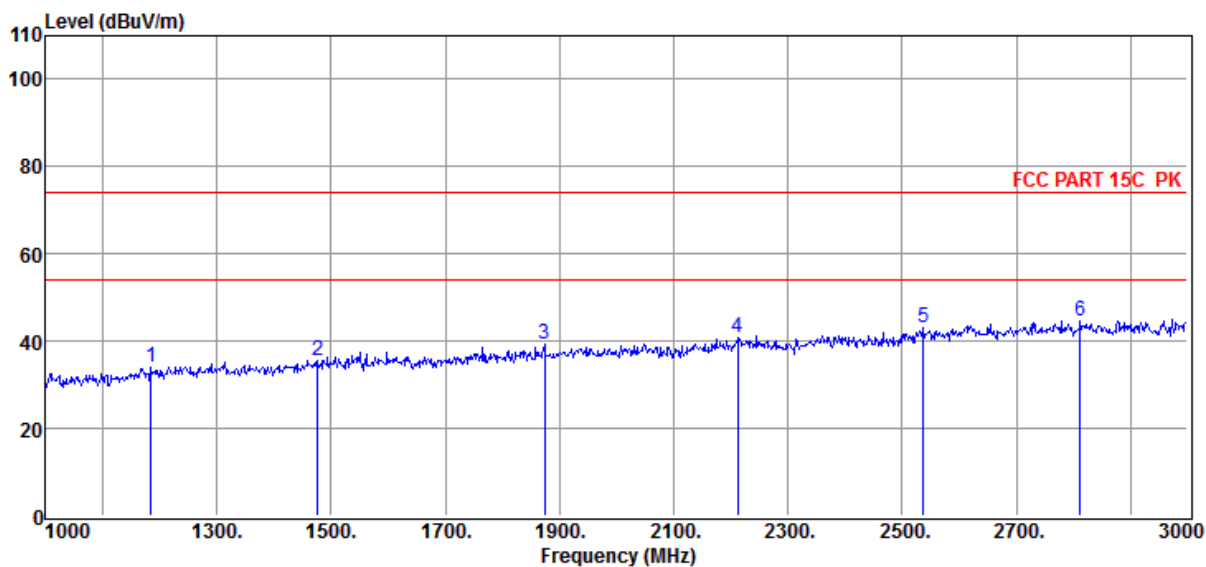

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1184.00	-5.64	34.03	74.00	-39.97	174	67	Peak	HORIZONTAL
2	1476.00	-3.20	35.61	74.00	-38.39	182	182	Peak	HORIZONTAL
3	1874.00	-0.21	39.20	74.00	-34.80	164	117	Peak	HORIZONTAL
4	2212.00	2.37	40.81	74.00	-33.19	154	343	Peak	HORIZONTAL
5	2538.00	4.52	42.92	74.00	-31.08	161	137	Peak	HORIZONTAL
6	2812.00	6.46	44.55	74.00	-29.45	185	274	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5745MHz

Data: 372

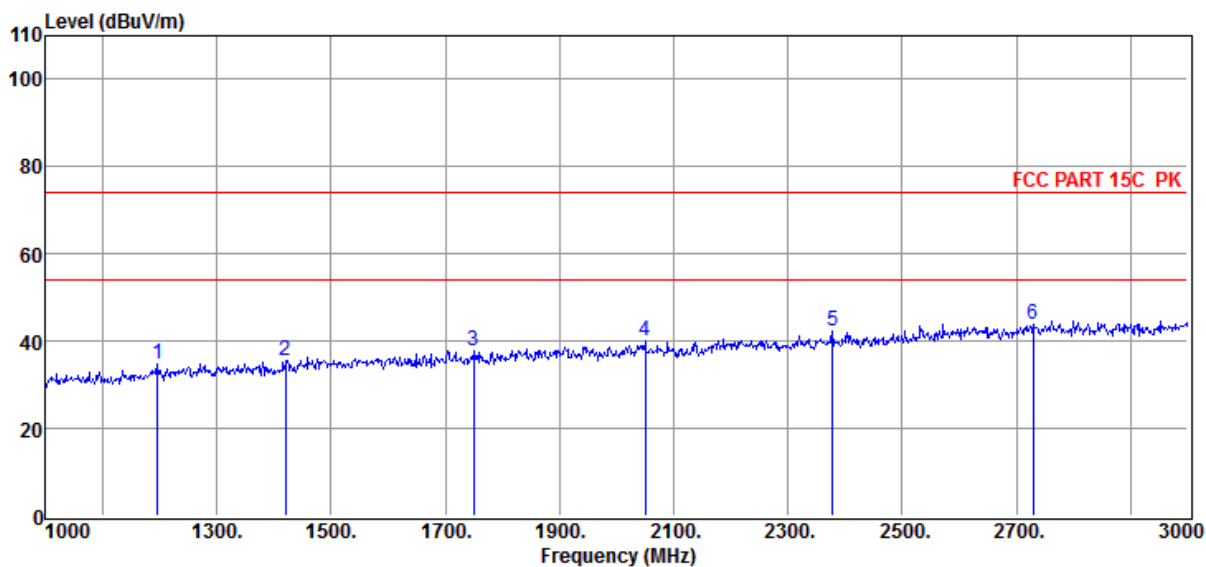

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1196.00	-5.40	34.73	74.00	-39.27	177	213	Peak	HORIZONTAL
2	1420.00	-3.85	35.61	74.00	-38.39	172	233	Peak	HORIZONTAL
3	1750.00	-1.44	37.98	74.00	-36.02	167	308	Peak	HORIZONTAL
4	2050.00	1.16	40.22	74.00	-33.78	163	261	Peak	HORIZONTAL
5	2378.00	3.27	42.22	74.00	-31.78	156	129	Peak	HORIZONTAL
6	2730.00	6.35	43.76	74.00	-30.24	170	138	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5745MHz

Data: 373

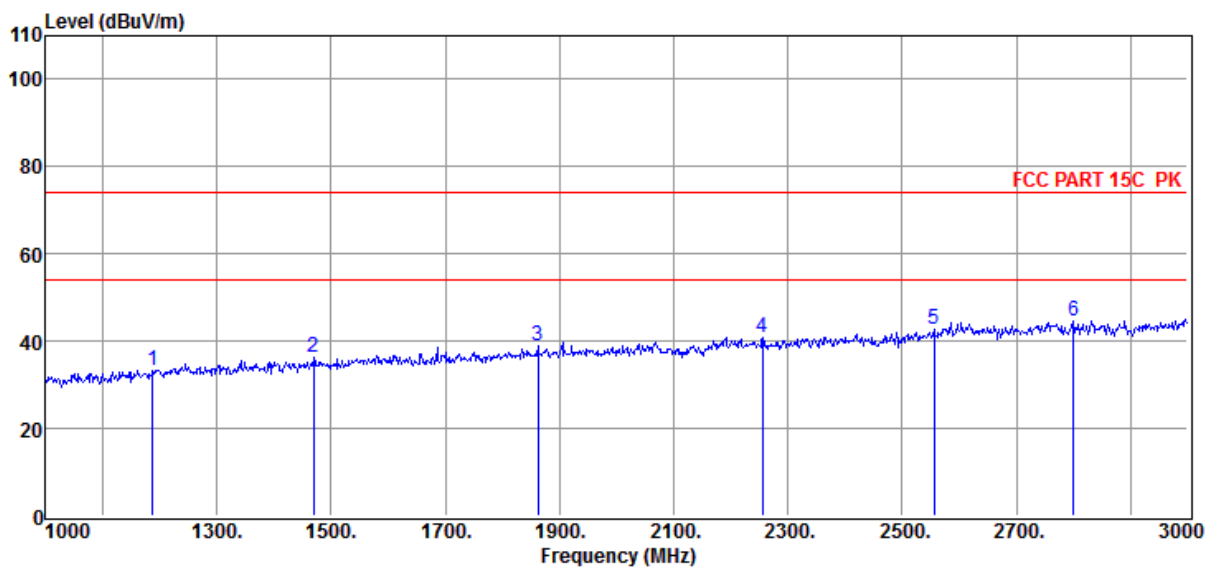

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1188.00	-5.56	33.43	74.00	-40.57	180	181	Peak	VERTICAL
2	1470.00	-3.27	36.47	74.00	-37.53	183	354	Peak	VERTICAL
3	1862.00	-0.26	38.90	74.00	-35.10	153	273	Peak	VERTICAL
4	2256.00	2.31	40.80	74.00	-33.20	172	79	Peak	VERTICAL
5	2556.00	4.92	42.65	74.00	-31.35	184	203	Peak	VERTICAL
6	2800.00	6.38	44.73	74.00	-29.27	165	200	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5785MHz

Data: 374

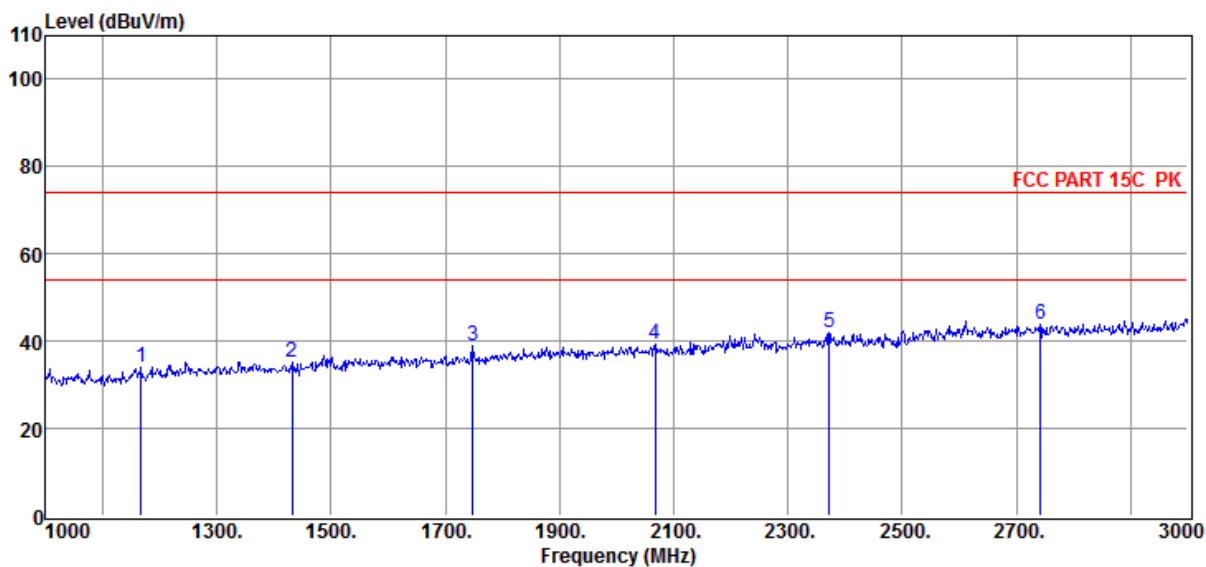

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1168.00	-5.96	34.07	74.00	-39.93	168	125	Peak	VERTICAL
2	1432.00	-3.70	35.16	74.00	-38.84	172	114	Peak	VERTICAL
3	1748.00	-1.46	39.06	74.00	-34.94	167	330	Peak	VERTICAL
4	2068.00	0.91	39.17	74.00	-34.83	164	28	Peak	VERTICAL
5	2372.00	3.25	42.03	74.00	-31.97	155	1	Peak	VERTICAL
6	2742.00	6.53	43.75	74.00	-30.25	150	162	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5785MHz

Data: 375

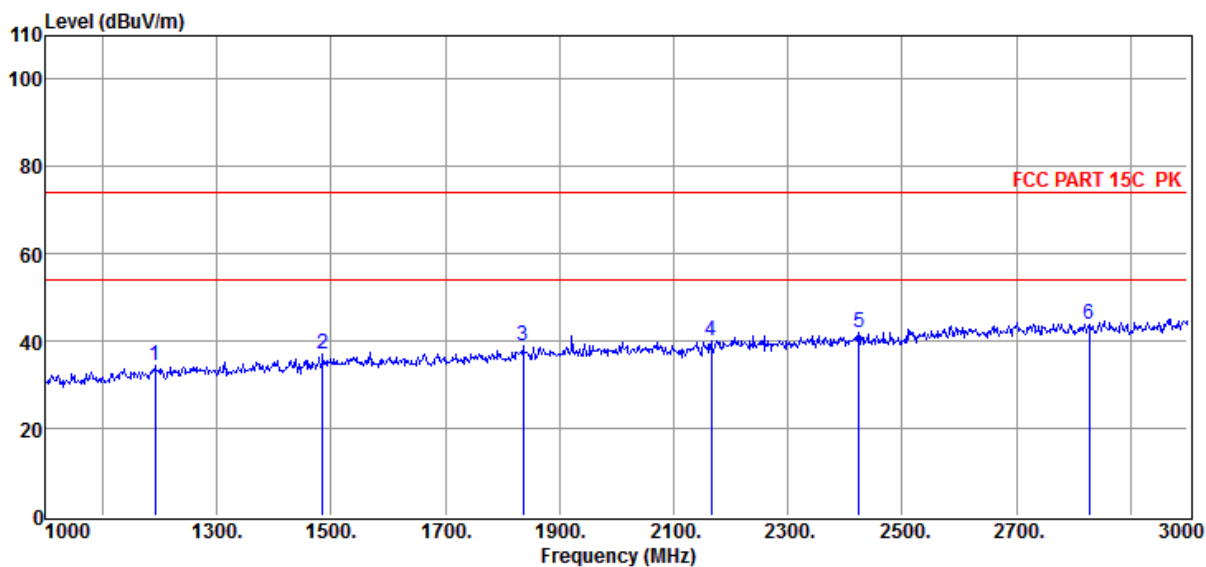

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1192.00	-5.48	34.34	74.00	-39.66	161	116	Peak	HORIZONTAL
2	1486.00	-3.10	36.91	74.00	-37.09	160	173	Peak	HORIZONTAL
3	1836.00	-0.55	38.85	74.00	-35.15	168	173	Peak	HORIZONTAL
4	2166.00	1.54	40.05	74.00	-33.95	176	306	Peak	HORIZONTAL
5	2424.00	3.31	42.04	74.00	-31.96	184	177	Peak	HORIZONTAL
6	2828.00	6.56	43.92	74.00	-30.08	158	241	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5825MHz

Data: 376

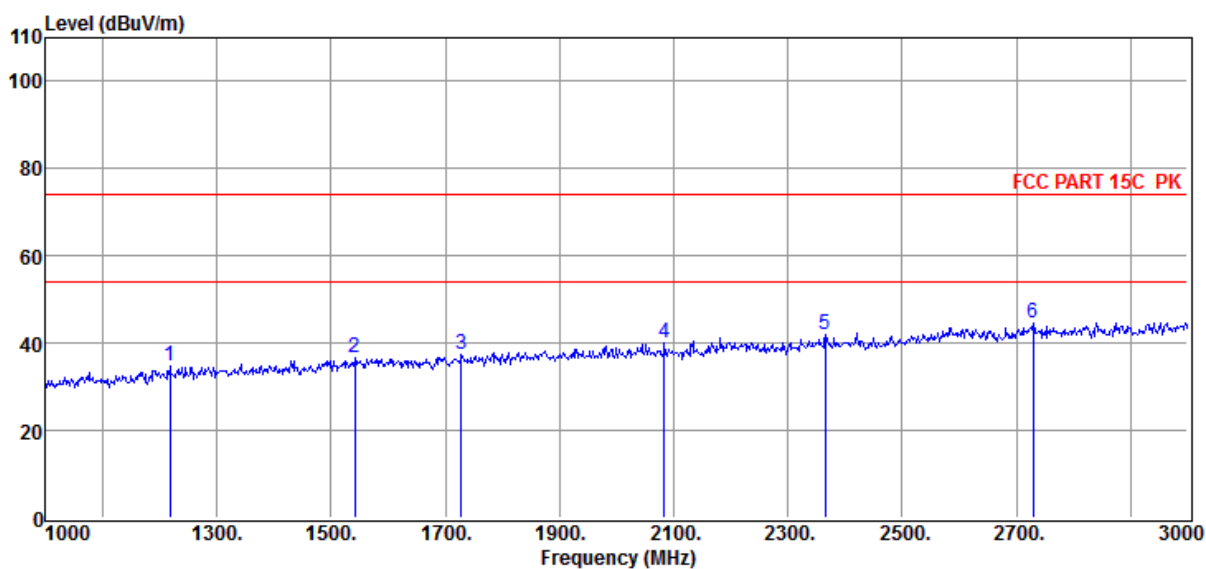

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1218.00	-5.11	34.74	74.00	-39.26	170	147	Peak	HORIZONTAL
2	1542.00	-2.54	36.70	74.00	-37.30	160	304	Peak	HORIZONTAL
3	1728.00	-1.68	37.27	74.00	-36.73	169	131	Peak	HORIZONTAL
4	2084.00	0.70	39.95	74.00	-34.05	186	104	Peak	HORIZONTAL
5	2366.00	3.23	42.01	74.00	-31.99	153	11	Peak	HORIZONTAL
6	2730.00	6.35	44.60	74.00	-29.40	177	181	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5825MHz

Data: 377

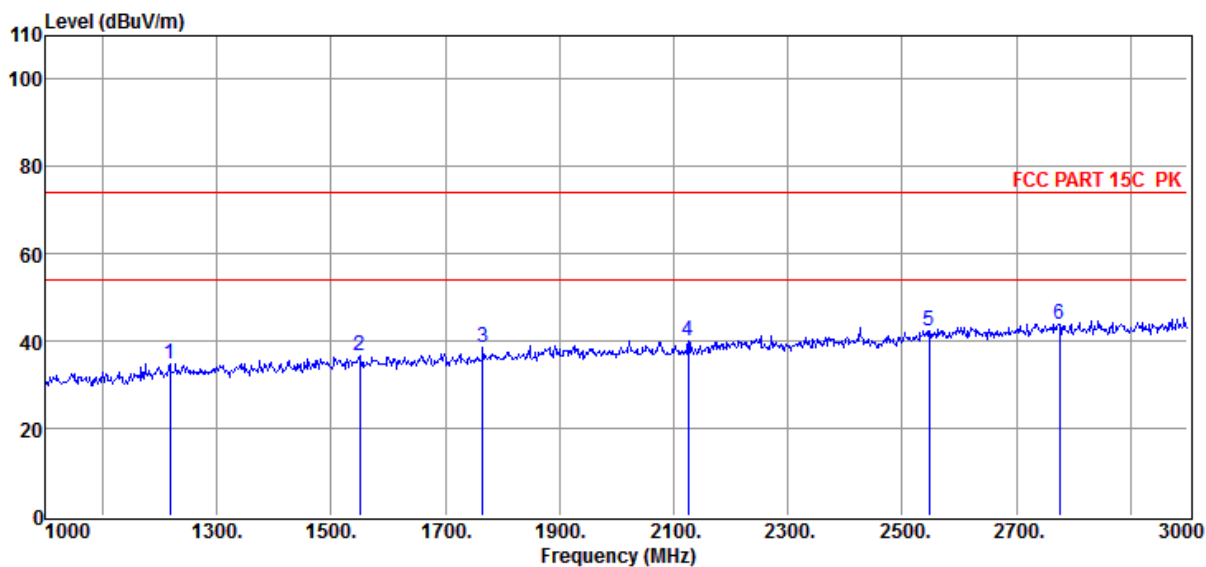

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1218.00	-5.11	34.95	74.00	-39.05	153	160	Peak	VERTICAL
2	1550.00	-2.46	36.81	74.00	-37.19	179	210	Peak	VERTICAL
3	1766.00	-1.34	38.63	74.00	-35.37	185	277	Peak	VERTICAL
4	2126.00	0.84	40.03	74.00	-33.97	188	82	Peak	VERTICAL
5	2548.00	4.75	42.30	74.00	-31.70	174	58	Peak	VERTICAL
6	2776.00	6.51	43.96	74.00	-30.04	172	75	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa Antenna/Distance : 3m/VERTICAL

Memo : 11A 6M ANT2 5180MHz

Data: 378

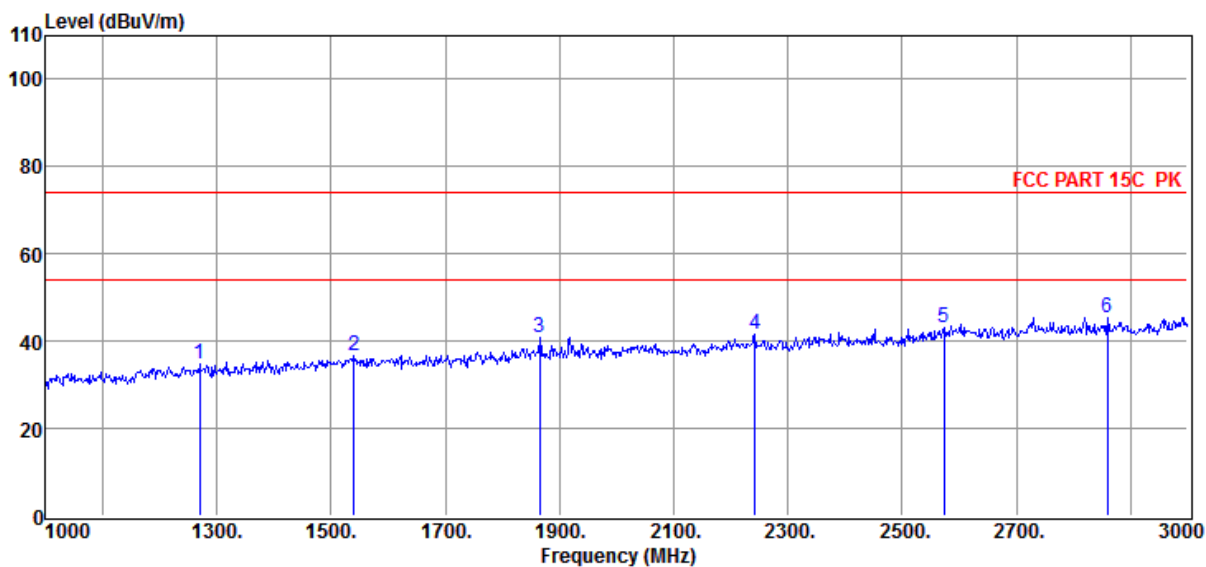

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1270.00	-4.71	34.88	74.00	-39.12	162	211	Peak	VERTICAL
2	1540.00	-2.56	36.61	74.00	-37.39	190	37	Peak	VERTICAL
3	1866.00	-0.24	40.87	74.00	-33.13	161	5	Peak	VERTICAL
4	2242.00	2.37	41.60	74.00	-32.40	171	178	Peak	VERTICAL
5	2574.00	5.33	42.96	74.00	-31.04	186	22	Peak	VERTICAL
6	2860.00	6.77	45.25	74.00	-28.75	174	138	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5180MHz

Data: 379

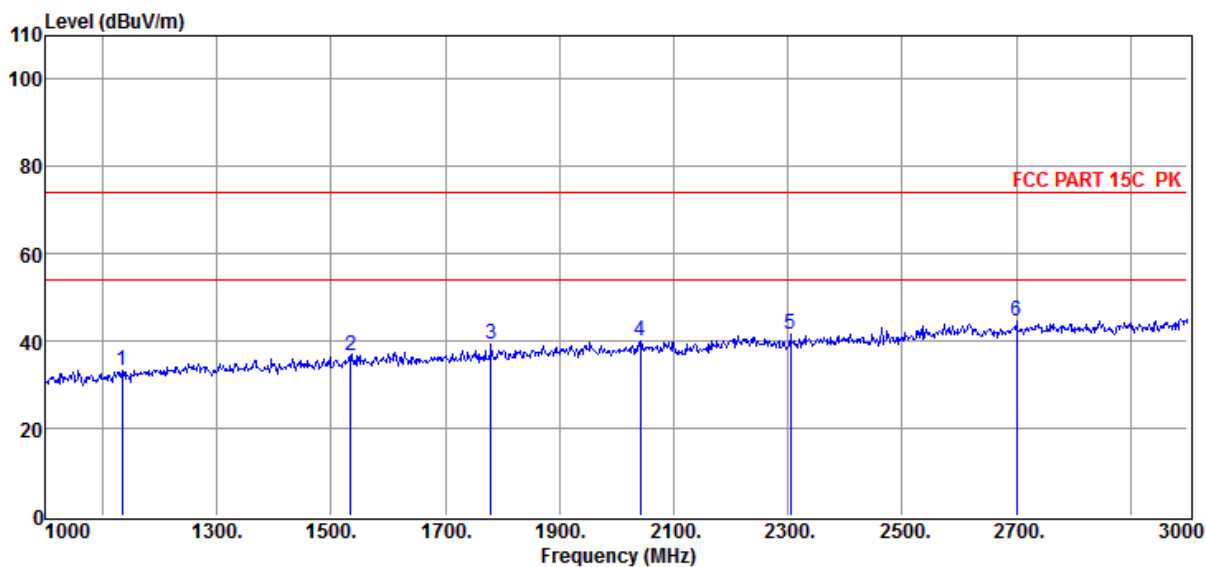

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1134.00	-6.46	33.29	74.00	-40.71	155	87	Peak	HORIZONTAL
2	1534.00	-2.62	36.69	74.00	-37.31	184	271	Peak	HORIZONTAL
3	1780.00	-1.25	39.14	74.00	-34.86	159	183	Peak	HORIZONTAL
4	2042.00	1.01	39.91	74.00	-34.09	177	244	Peak	HORIZONTAL
5	2304.00	2.01	41.59	74.00	-32.41	172	318	Peak	HORIZONTAL
6	2700.00	5.91	44.75	74.00	-29.25	177	299	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5200MHz

Data: 380

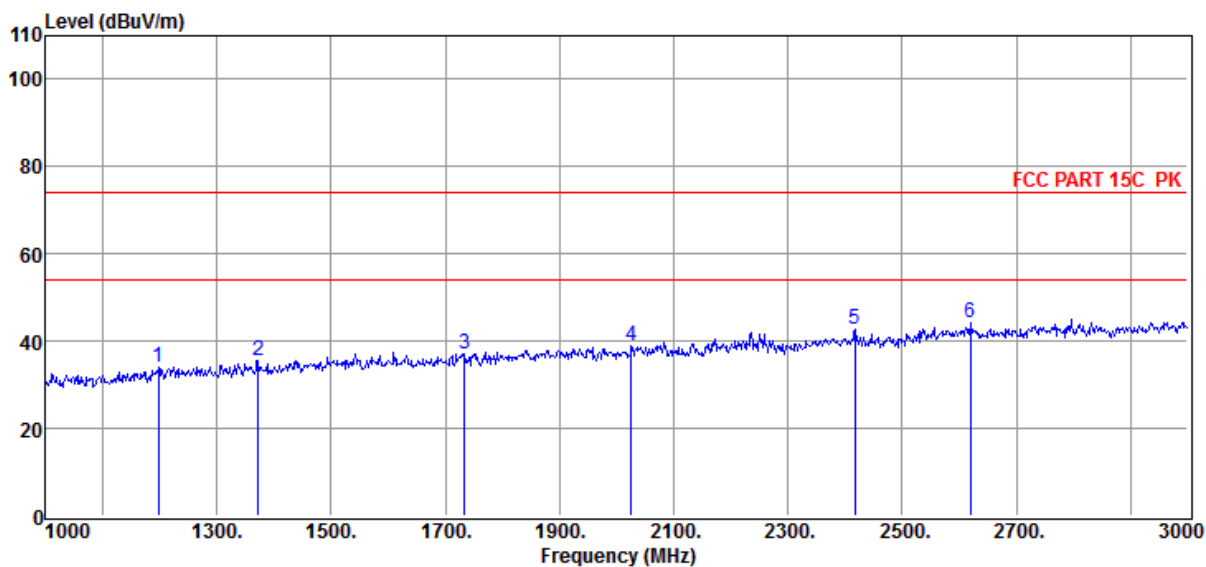

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1198.00	-5.36	34.20	74.00	-39.80	184	261	Peak	HORIZONTAL
2	1372.00	-4.24	35.52	74.00	-38.48	150	125	Peak	HORIZONTAL
3	1734.00	-1.62	37.17	74.00	-36.83	169	228	Peak	HORIZONTAL
4	2026.00	0.71	38.76	74.00	-35.24	153	336	Peak	HORIZONTAL
5	2418.00	3.32	42.64	74.00	-31.36	167	187	Peak	HORIZONTAL
6	2620.00	5.67	44.22	74.00	-29.78	182	56	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5200MHz

Data: 381

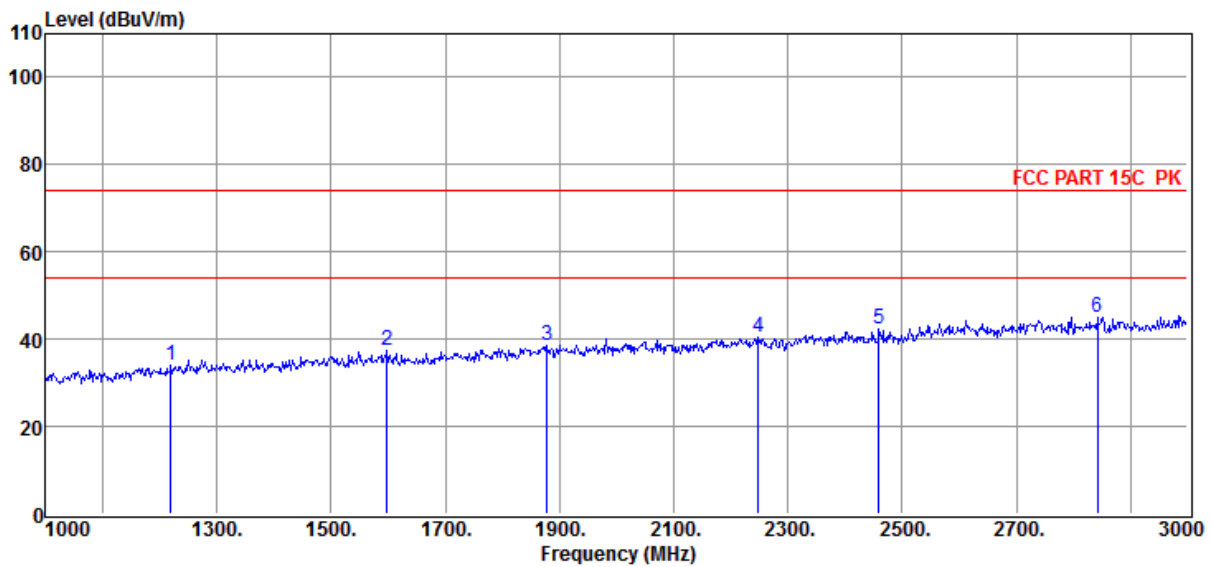

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1220.00	-5.08	33.96	74.00	-40.04	169	181	Peak	VERTICAL
2	1598.00	-2.29	37.57	74.00	-36.43	168	121	Peak	VERTICAL
3	1878.00	-0.19	38.38	74.00	-35.62	162	189	Peak	VERTICAL
4	2248.00	2.37	40.42	74.00	-33.58	177	254	Peak	VERTICAL
5	2460.00	3.36	42.35	74.00	-31.65	157	271	Peak	VERTICAL
6	2842.00	6.66	44.90	74.00	-29.10	179	181	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5240MHz

Data: 382

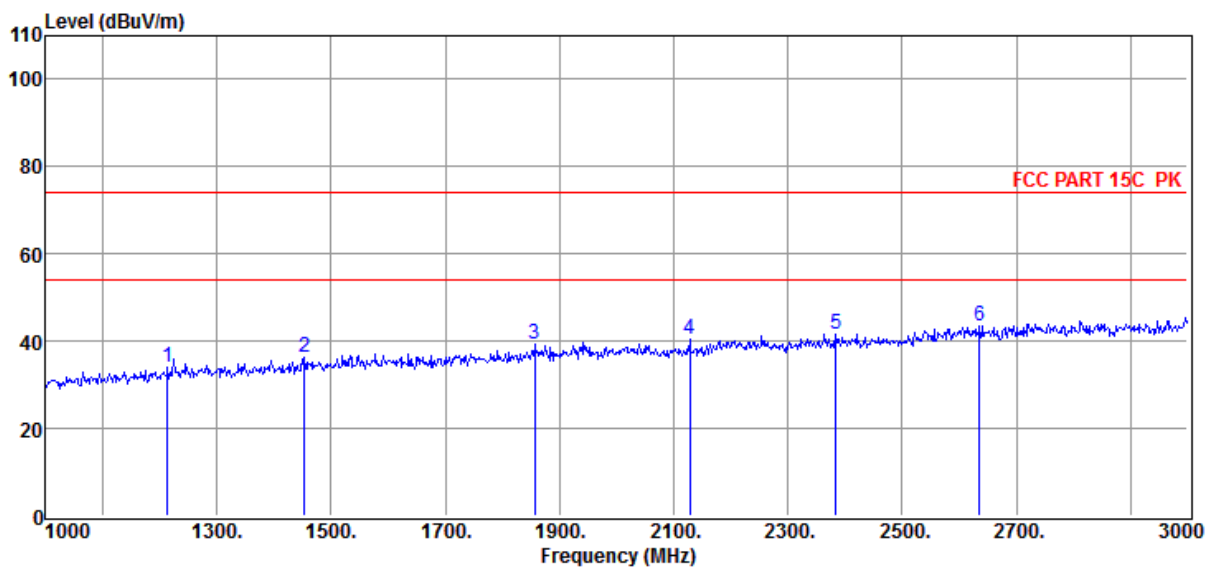

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1214.00	-5.15	34.10	74.00	-39.90	159	168	Peak	VERTICAL
2	1454.00	-3.44	36.21	74.00	-37.79	157	1	Peak	VERTICAL
3	1856.00	-0.30	39.47	74.00	-34.53	190	22	Peak	VERTICAL
4	2128.00	0.86	40.34	74.00	-33.66	167	268	Peak	VERTICAL
5	2384.00	3.29	41.48	74.00	-32.52	188	30	Peak	VERTICAL
6	2636.00	5.47	43.57	74.00	-30.43	183	130	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5240MHz

Data: 383

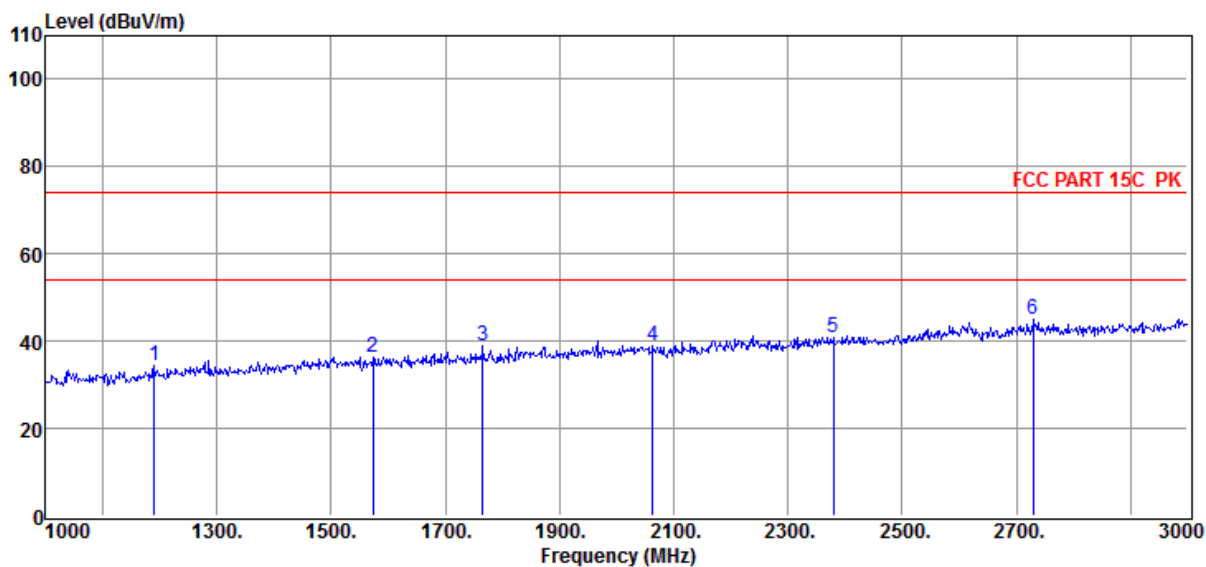

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1190.00	-5.52	34.30	74.00	-39.70	182	92	Peak	HORIZONTAL
2	1574.00	-2.37	36.38	74.00	-37.62	169	307	Peak	HORIZONTAL
3	1766.00	-1.34	38.76	74.00	-35.24	181	227	Peak	HORIZONTAL
4	2064.00	0.97	39.05	74.00	-34.95	153	112	Peak	HORIZONTAL
5	2380.00	3.27	40.96	74.00	-33.04	168	242	Peak	HORIZONTAL
6	2730.00	6.35	44.89	74.00	-29.11	158	239	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5260MHz

Data: 384

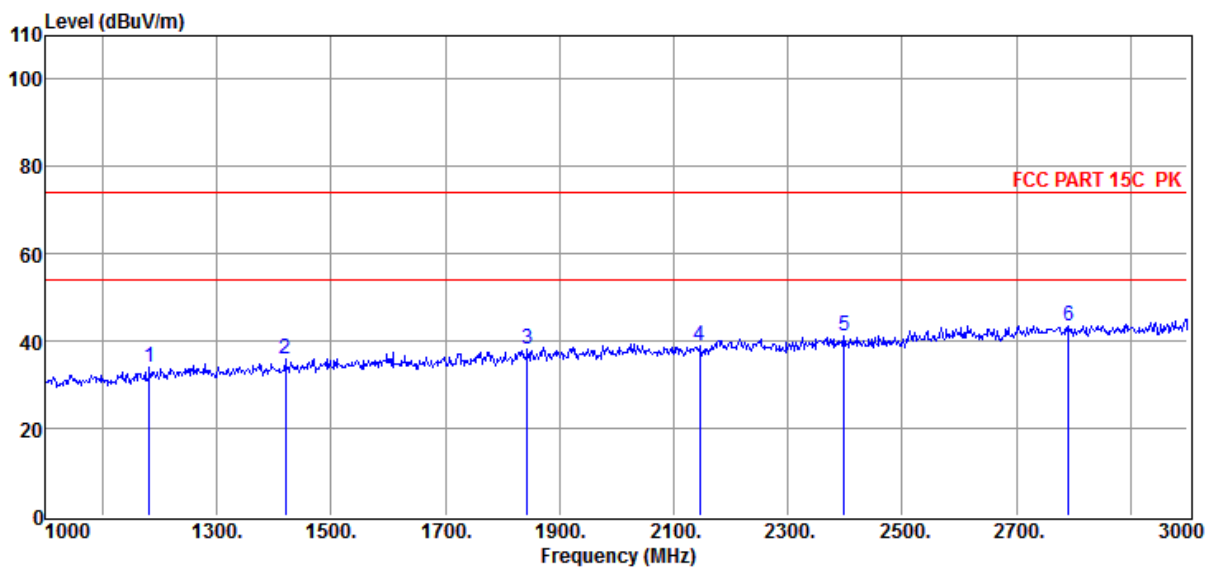

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1182.00	-5.68	33.86	74.00	-40.14	155	12	Peak	HORIZONTAL
2	1420.00	-3.85	36.02	74.00	-37.98	172	66	Peak	HORIZONTAL
3	1844.00	-0.43	38.01	74.00	-35.99	190	262	Peak	HORIZONTAL
4	2146.00	1.10	38.89	74.00	-35.11	181	317	Peak	HORIZONTAL
5	2398.00	3.32	41.17	74.00	-32.83	151	271	Peak	HORIZONTAL
6	2792.00	6.43	43.45	74.00	-30.55	186	343	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5260MHz

Data: 385

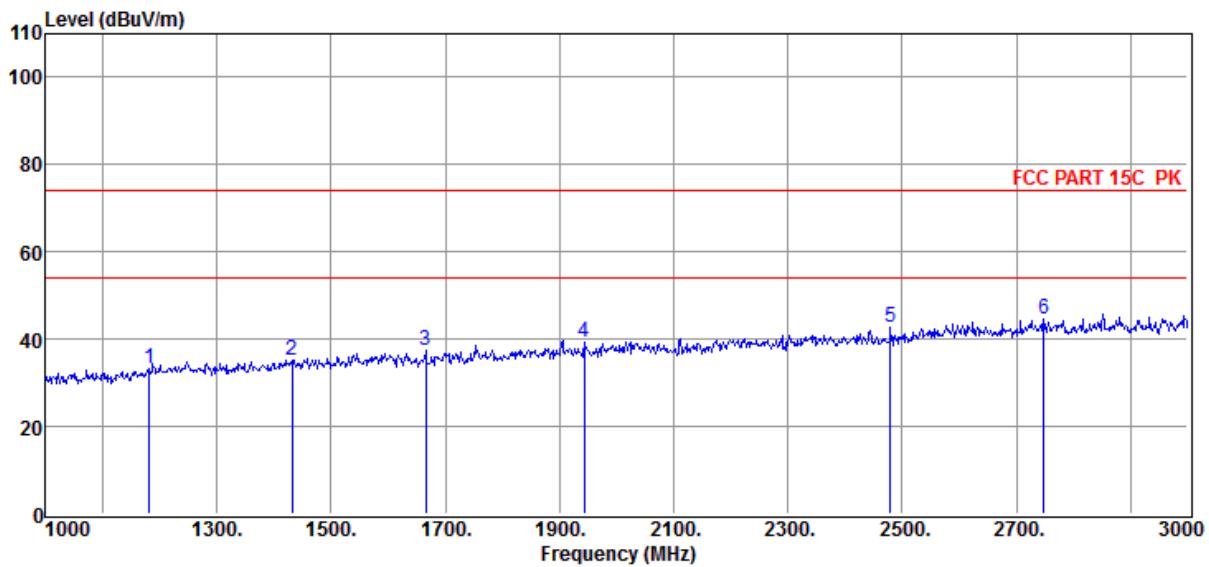

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1182.00	-5.68	33.30	74.00	-40.70	160	102	Peak	VERTICAL
2	1432.00	-3.70	35.27	74.00	-38.73	169	256	Peak	VERTICAL
3	1666.00	-2.23	37.26	74.00	-36.74	158	141	Peak	VERTICAL
4	1944.00	0.26	39.13	74.00	-34.87	152	110	Peak	VERTICAL
5	2480.00	3.50	42.60	74.00	-31.40	159	264	Peak	VERTICAL
6	2748.00	6.62	44.55	74.00	-29.45	174	348	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5280MHz

Data: 386

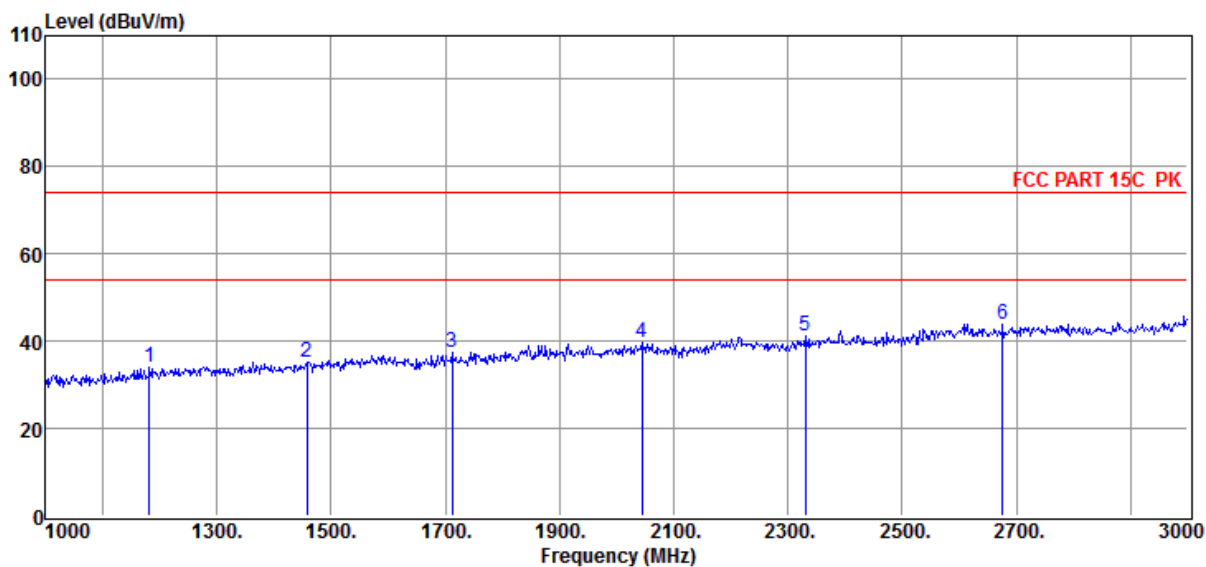

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1182.00	-5.68	33.94	74.00	-40.06	152	0	Peak	VERTICAL
2	1458.00	-3.40	35.33	74.00	-38.67	161	190	Peak	VERTICAL
3	1712.00	-1.85	37.57	74.00	-36.43	177	254	Peak	VERTICAL
4	2044.00	1.05	39.77	74.00	-34.23	190	18	Peak	VERTICAL
5	2330.00	2.67	41.08	74.00	-32.92	153	92	Peak	VERTICAL
6	2676.00	5.61	43.78	74.00	-30.22	187	105	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5280MHz

Data: 387

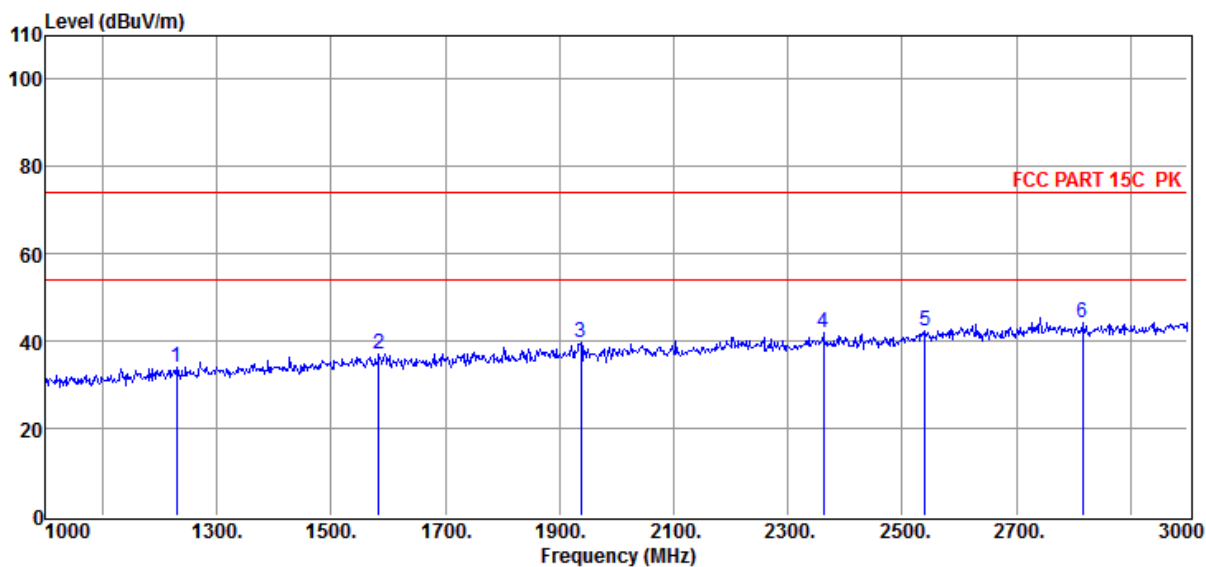

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1230.00	-4.96	34.00	74.00	-40.00	164	58	Peak	HORIZONTAL
2	1584.00	-2.33	37.10	74.00	-36.90	161	283	Peak	HORIZONTAL
3	1938.00	0.22	39.86	74.00	-34.14	185	312	Peak	HORIZONTAL
4	2362.00	3.22	41.89	74.00	-32.11	183	237	Peak	HORIZONTAL
5	2540.00	4.56	42.17	74.00	-31.83	186	337	Peak	HORIZONTAL
6	2816.00	6.49	44.12	74.00	-29.88	153	33	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5320MHz

Data: 388

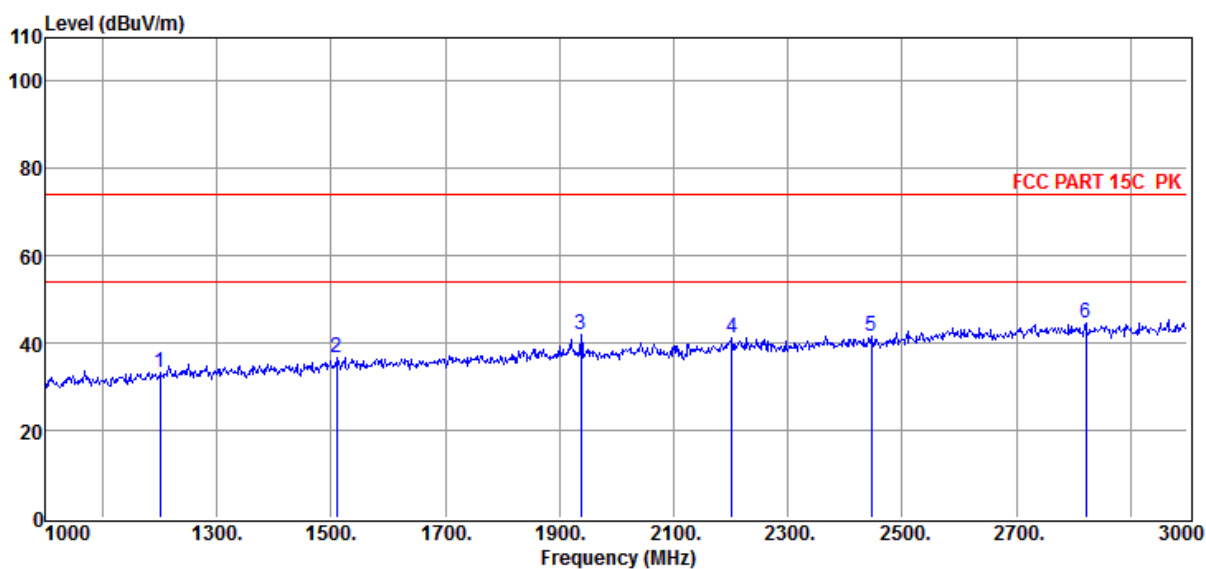

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1200.00	-5.32	33.35	74.00	-40.65	182	8	Peak	HORIZONTAL
2	1510.00	-2.85	36.69	74.00	-37.31	189	26	Peak	HORIZONTAL
3	1938.00	0.22	41.95	74.00	-32.05	157	215	Peak	HORIZONTAL
4	2202.00	2.37	41.07	74.00	-32.93	161	61	Peak	HORIZONTAL
5	2446.00	3.30	41.56	74.00	-32.44	165	118	Peak	HORIZONTAL
6	2822.00	6.53	44.48	74.00	-29.52	156	135	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5320MHz

Data: 389

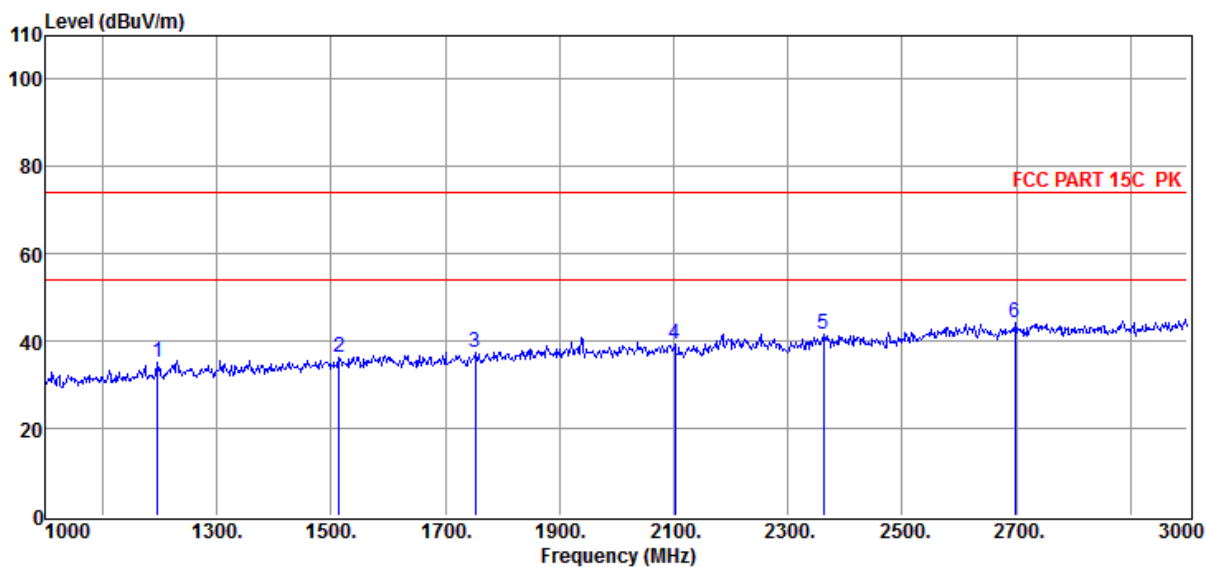

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1196.00	-5.40	35.15	74.00	-38.85	159	120	Peak	VERTICAL
2	1514.00	-2.82	36.42	74.00	-37.58	151	150	Peak	VERTICAL
3	1752.00	-1.43	37.31	74.00	-36.69	165	89	Peak	VERTICAL
4	2102.00	0.52	39.34	74.00	-34.66	155	5	Peak	VERTICAL
5	2362.00	3.22	41.73	74.00	-32.27	166	214	Peak	VERTICAL
6	2698.00	5.88	44.33	74.00	-29.67	160	195	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5500MHz

Data: 390

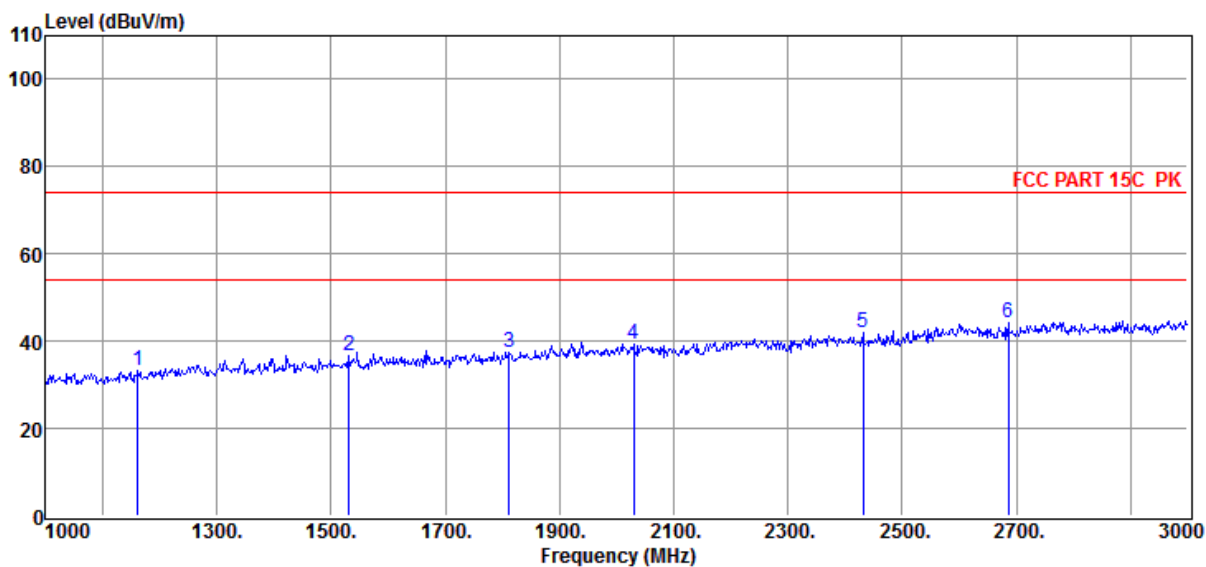

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1162.00	-6.08	33.09	74.00	-40.91	188	269	Peak	VERTICAL
2	1532.00	-2.64	36.55	74.00	-37.45	168	28	Peak	VERTICAL
3	1812.00	-0.94	37.48	74.00	-36.52	184	339	Peak	VERTICAL
4	2030.00	0.79	39.17	74.00	-34.83	163	356	Peak	VERTICAL
5	2432.00	3.30	42.00	74.00	-32.00	184	241	Peak	VERTICAL
6	2686.00	5.74	44.20	74.00	-29.80	177	49	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5500MHz

Data: 391

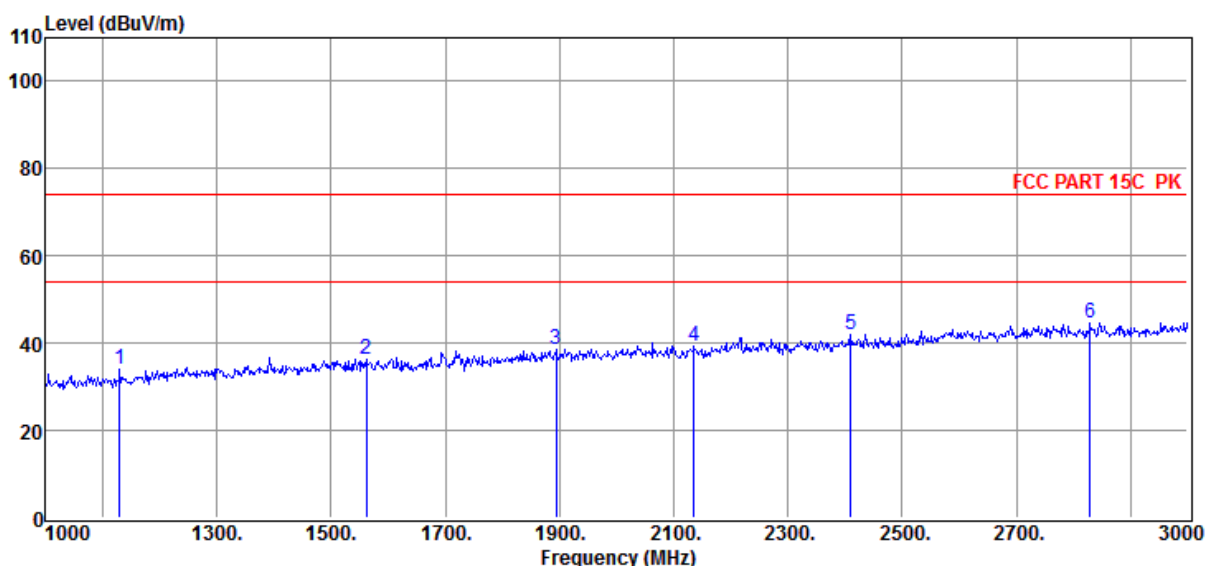

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1130.00	-6.49	33.90	74.00	-40.10	164	20	Peak	HORIZONTAL
2	1562.00	-2.41	36.33	74.00	-37.67	181	293	Peak	HORIZONTAL
3	1894.00	-0.10	38.70	74.00	-35.30	173	38	Peak	HORIZONTAL
4	2136.00	0.97	39.26	74.00	-34.74	188	275	Peak	HORIZONTAL
5	2410.00	3.32	42.13	74.00	-31.87	185	79	Peak	HORIZONTAL
6	2830.00	6.58	44.57	74.00	-29.43	157	263	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5580MHz

Data: 392

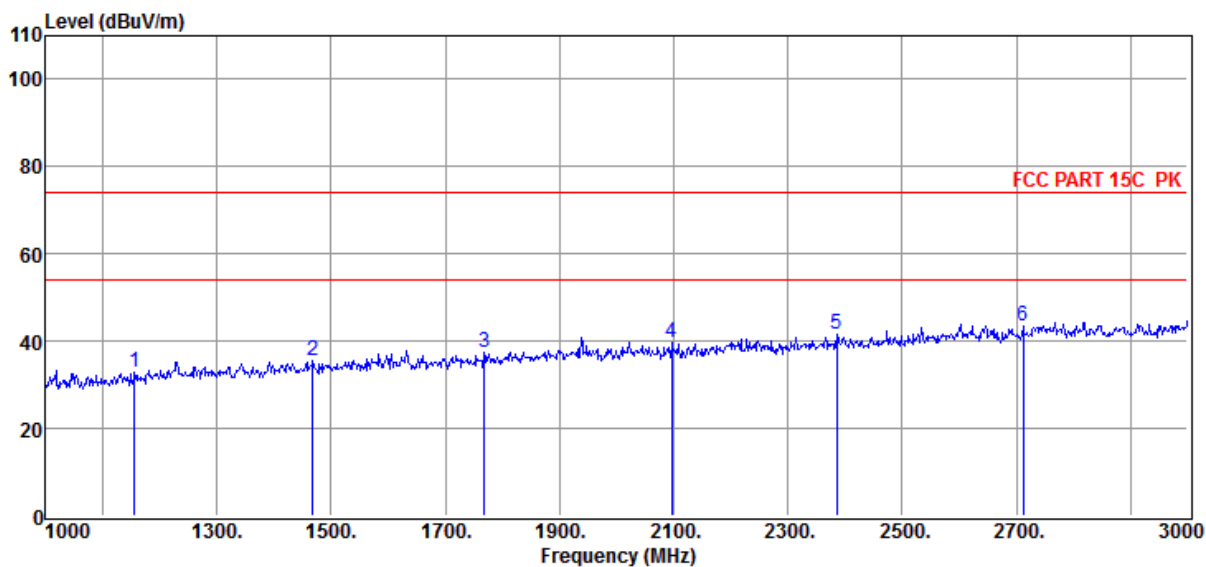

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1156.00	-6.20	32.92	74.00	-41.08	166	287	Peak	HORIZONTAL
2	1468.00	-3.29	35.67	74.00	-38.33	169	50	Peak	HORIZONTAL
3	1768.00	-1.33	37.27	74.00	-36.73	175	99	Peak	HORIZONTAL
4	2096.00	0.55	39.67	74.00	-34.33	187	319	Peak	HORIZONTAL
5	2386.00	3.29	41.53	74.00	-32.47	161	315	Peak	HORIZONTAL
6	2712.00	6.08	43.61	74.00	-30.39	165	52	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5580MHz

Data: 393

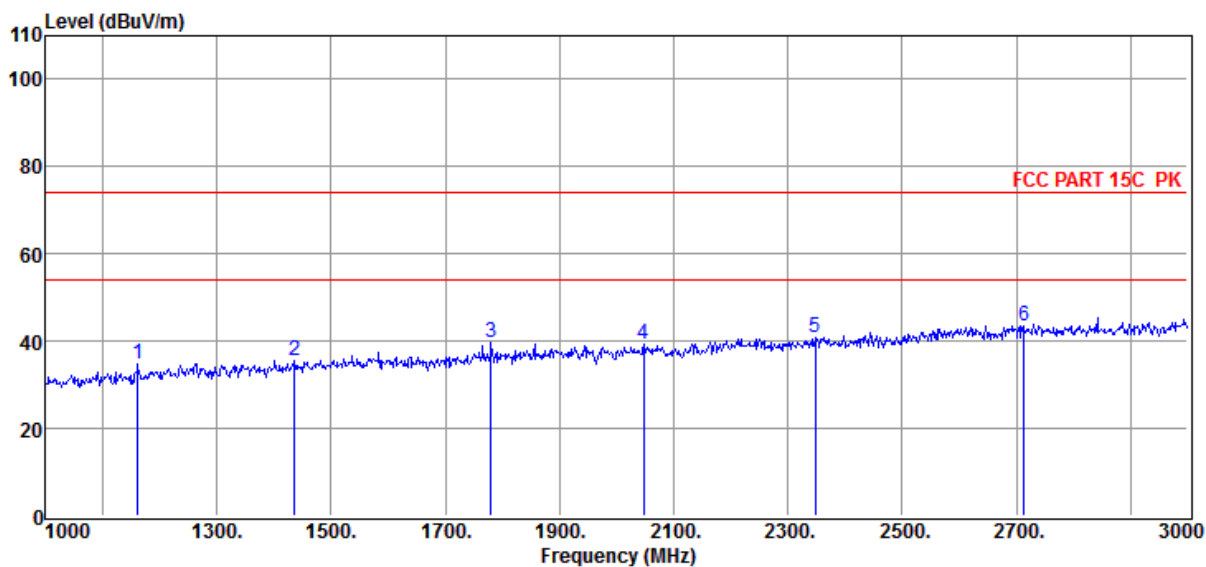

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1162.00	-6.08	34.78	74.00	-39.22	160	215	Peak	VERTICAL
2	1436.00	-3.65	35.69	74.00	-38.31	188	209	Peak	VERTICAL
3	1780.00	-1.25	39.51	74.00	-34.49	166	203	Peak	VERTICAL
4	2048.00	1.12	39.27	74.00	-34.73	172	332	Peak	VERTICAL
5	2348.00	3.14	40.92	74.00	-33.08	167	1	Peak	VERTICAL
6	2714.00	6.12	43.56	74.00	-30.44	179	11	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5700MHz

Data: 394

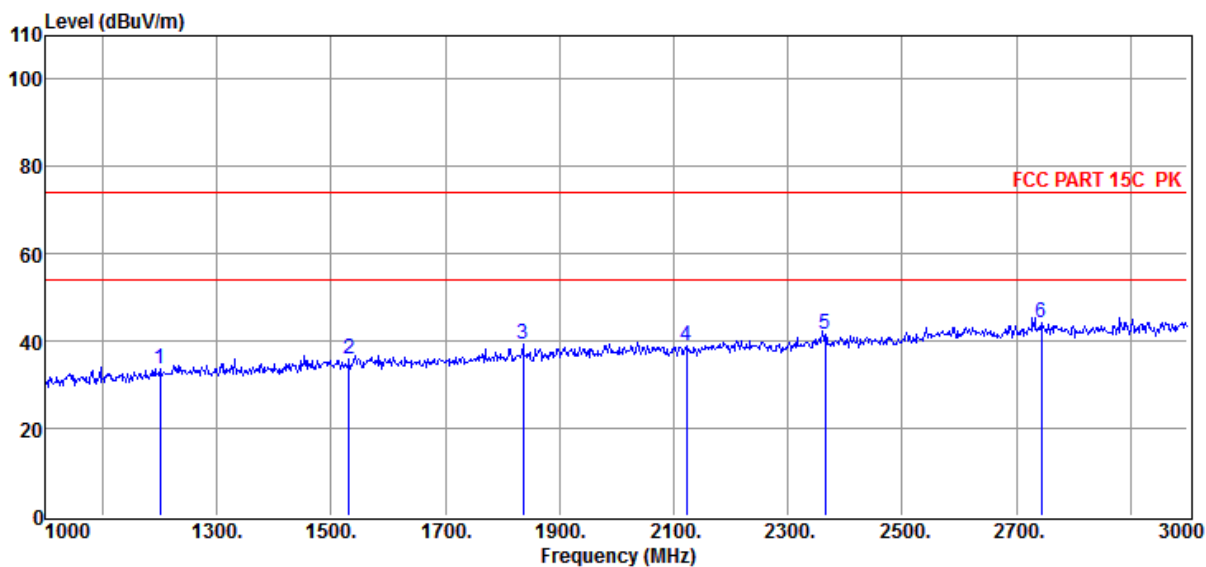

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1200.00	-5.32	33.70	74.00	-40.30	166	106	Peak	VERTICAL
2	1532.00	-2.64	35.75	74.00	-38.25	172	196	Peak	VERTICAL
3	1836.00	-0.55	39.35	74.00	-34.65	151	227	Peak	VERTICAL
4	2122.00	0.78	39.08	74.00	-34.92	150	134	Peak	VERTICAL
5	2366.00	3.23	41.61	74.00	-32.39	190	142	Peak	VERTICAL
6	2744.00	6.56	44.20	74.00	-29.80	169	167	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5700MHz

Data: 395

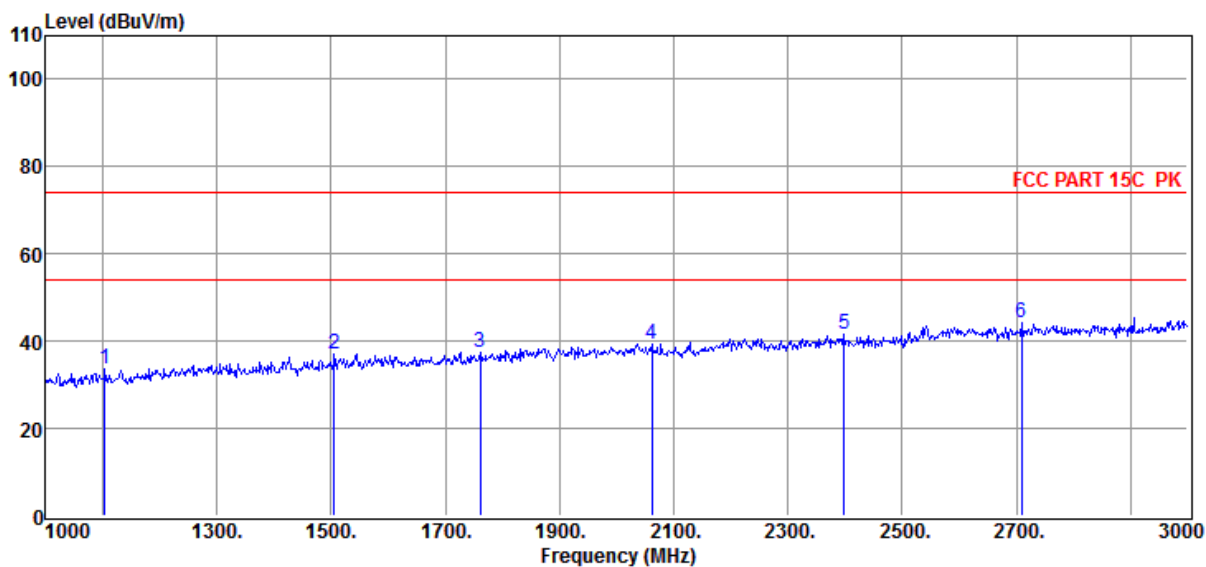

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1104.00	-6.72	33.69	74.00	-40.31	177	230	Peak	HORIZONTAL
2	1506.00	-2.89	36.96	74.00	-37.04	166	196	Peak	HORIZONTAL
3	1762.00	-1.37	37.37	74.00	-36.63	153	287	Peak	HORIZONTAL
4	2062.00	1.00	39.38	74.00	-34.62	186	316	Peak	HORIZONTAL
5	2398.00	3.32	41.44	74.00	-32.56	186	309	Peak	HORIZONTAL
6	2710.00	6.06	44.24	74.00	-29.76	189	248	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5745MHz

Data: 396

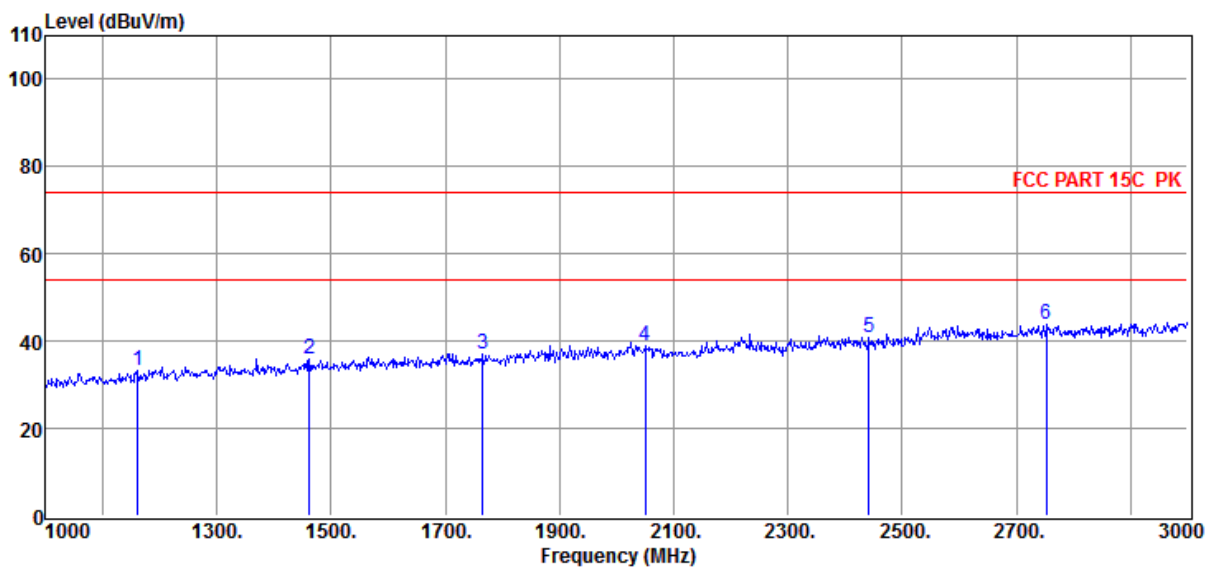

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1162.00	-6.08	33.26	74.00	-40.74	152	92	Peak	HORIZONTAL
2	1462.00	-3.35	35.87	74.00	-38.13	181	340	Peak	HORIZONTAL
3	1766.00	-1.34	36.94	74.00	-37.06	164	340	Peak	HORIZONTAL
4	2050.00	1.16	38.96	74.00	-35.04	159	116	Peak	HORIZONTAL
5	2442.00	3.29	40.97	74.00	-33.03	157	194	Peak	HORIZONTAL
6	2752.00	6.64	43.68	74.00	-30.32	176	350	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5745MHz

Data: 397

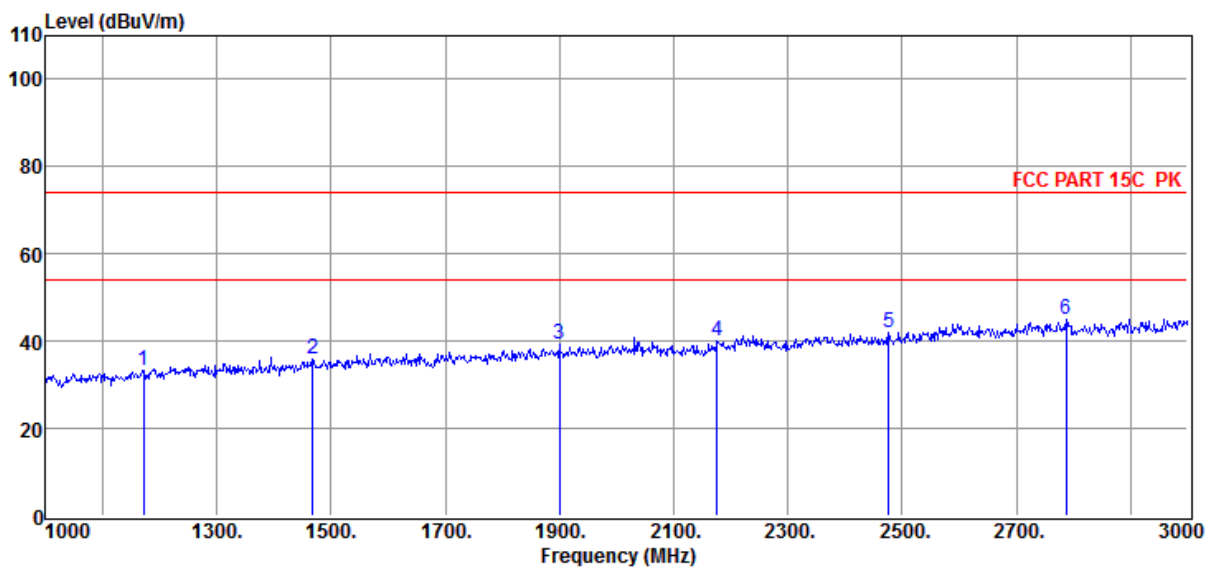

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1172.00	-5.88	33.28	74.00	-40.72	166	128	Peak	VERTICAL
2	1468.00	-3.29	36.06	74.00	-37.94	178	184	Peak	VERTICAL
3	1900.00	-0.07	39.43	74.00	-34.57	150	201	Peak	VERTICAL
4	2176.00	1.78	40.20	74.00	-33.80	165	193	Peak	VERTICAL
5	2476.00	3.48	41.93	74.00	-32.07	182	69	Peak	VERTICAL
6	2788.00	6.44	45.10	74.00	-28.90	152	267	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5785MHz

Data: 398

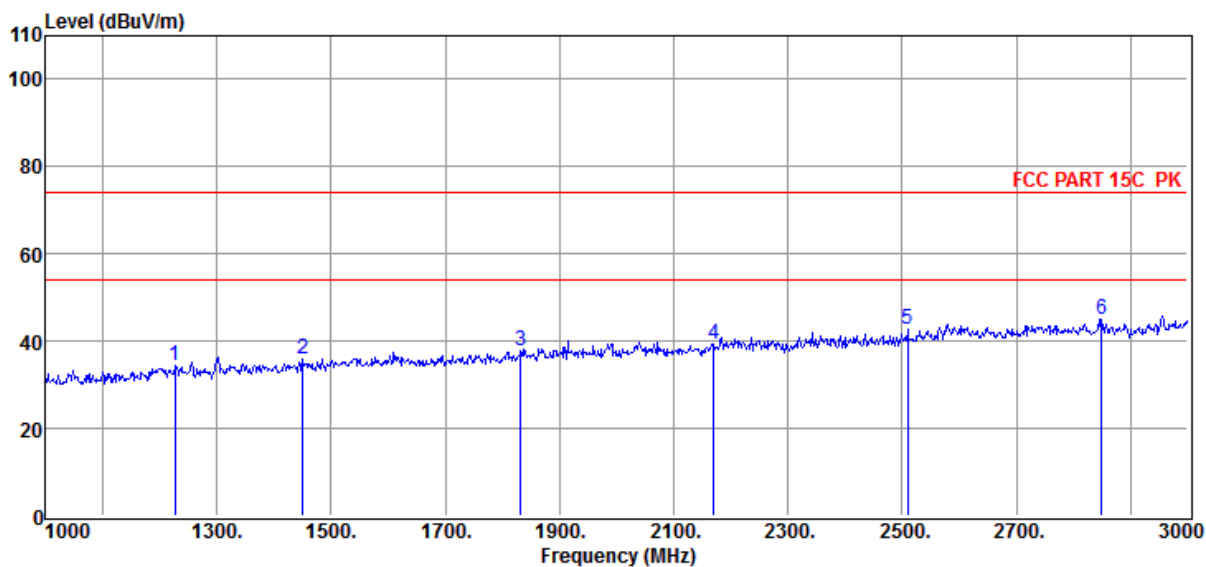

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1226.00	-5.01	34.23	74.00	-39.77	186	258	Peak	VERTICAL
2	1450.00	-3.48	35.90	74.00	-38.10	175	258	Peak	VERTICAL
3	1832.00	-0.62	37.96	74.00	-36.04	152	124	Peak	VERTICAL
4	2170.00	1.64	39.14	74.00	-34.86	190	342	Peak	VERTICAL
5	2510.00	3.87	42.53	74.00	-31.47	166	50	Peak	VERTICAL
6	2850.00	6.71	45.05	74.00	-28.95	185	129	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5785MHz

Data: 399

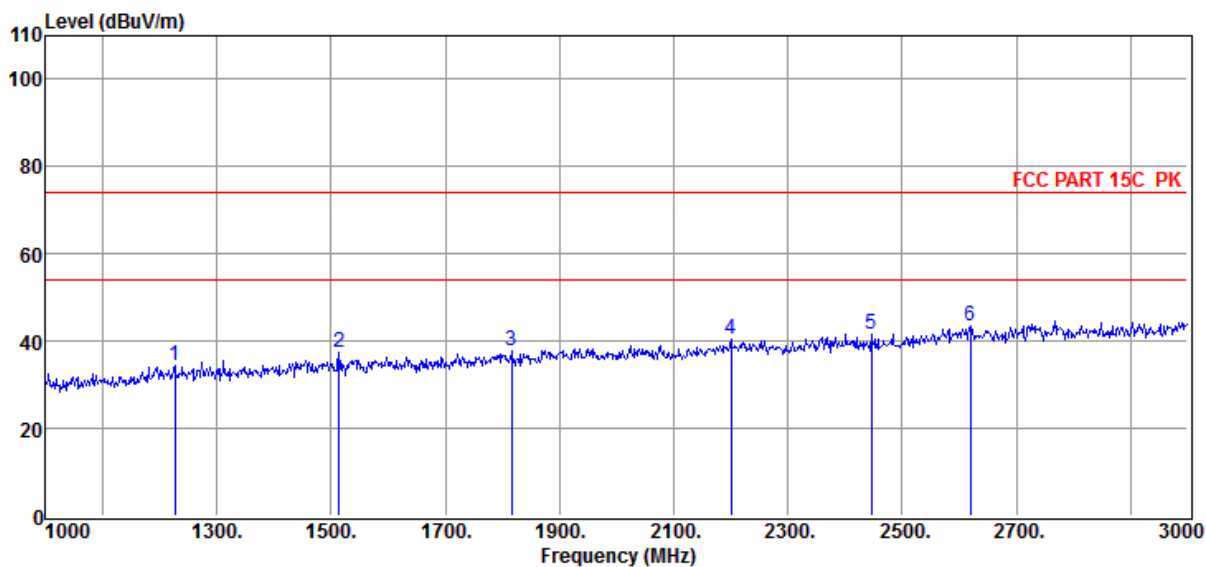

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1226.00	-5.01	34.50	74.00	-39.50	158	231	Peak	HORIZONTAL
2	1514.00	-2.82	37.30	74.00	-36.70	166	121	Peak	HORIZONTAL
3	1816.00	-0.87	37.71	74.00	-36.29	160	187	Peak	HORIZONTAL
4	2200.00	2.37	40.52	74.00	-33.48	182	140	Peak	HORIZONTAL
5	2446.00	3.30	41.75	74.00	-32.25	172	94	Peak	HORIZONTAL
6	2620.00	5.67	43.29	74.00	-30.71	163	199	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5825MHz

Data: 400

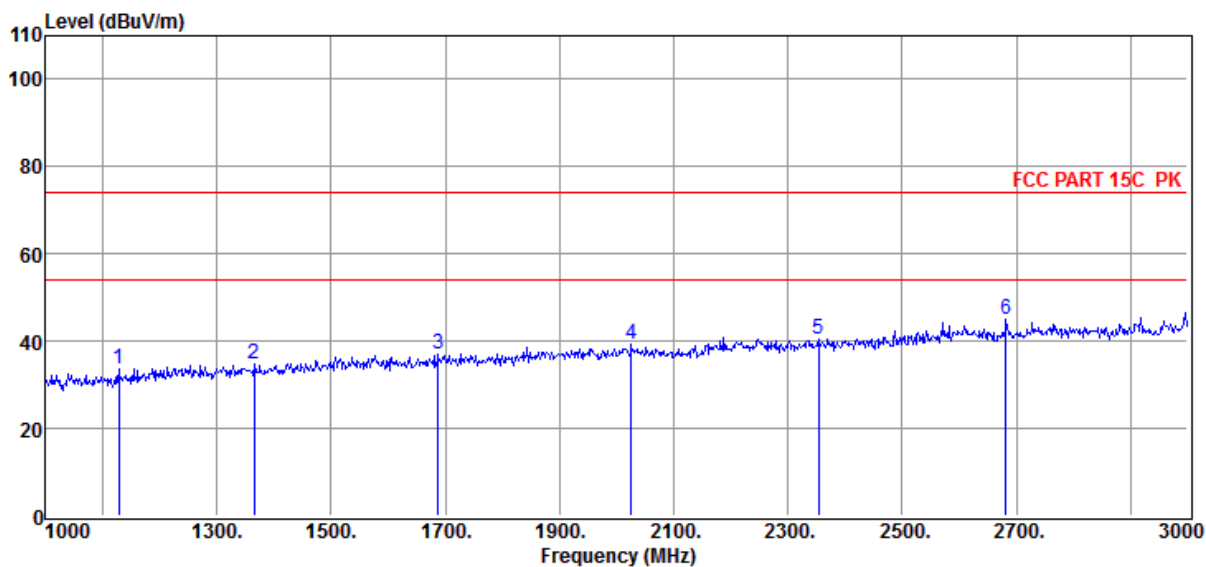

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1128.00	-6.51	33.58	74.00	-40.42	162	295	Peak	HORIZONTAL
2	1366.00	-4.28	34.95	74.00	-39.05	154	218	Peak	HORIZONTAL
3	1688.00	-2.07	36.98	74.00	-37.02	165	51	Peak	HORIZONTAL
4	2026.00	0.71	39.39	74.00	-34.61	154	254	Peak	HORIZONTAL
5	2354.00	3.20	40.55	74.00	-33.45	188	187	Peak	HORIZONTAL
6	2682.00	5.69	44.95	74.00	-29.05	190	70	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT2 5825MHz

Data: 401

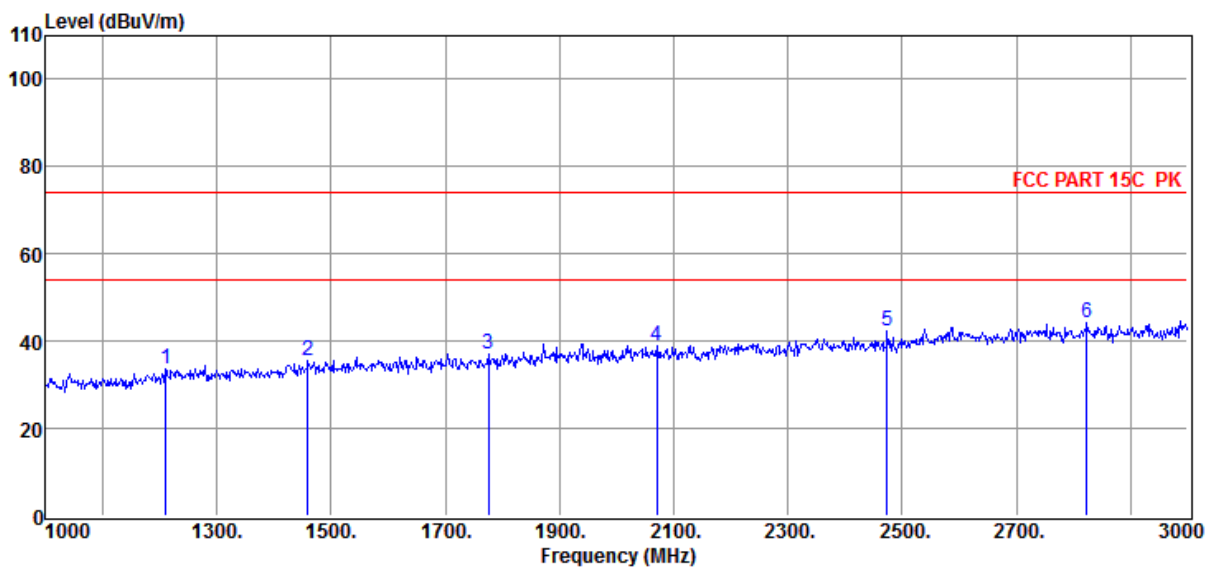

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1210.00	-5.20	33.61	74.00	-40.39	178	136	Peak	VERTICAL
2	1460.00	-3.37	35.54	74.00	-38.46	175	97	Peak	VERTICAL
3	1776.00	-1.27	37.20	74.00	-36.80	184	133	Peak	VERTICAL
4	2070.00	0.89	38.83	74.00	-35.17	185	270	Peak	VERTICAL
5	2474.00	3.45	42.42	74.00	-31.58	179	353	Peak	VERTICAL
6	2824.00	6.54	44.28	74.00	-29.72	187	160	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5180MHz

Data: 402

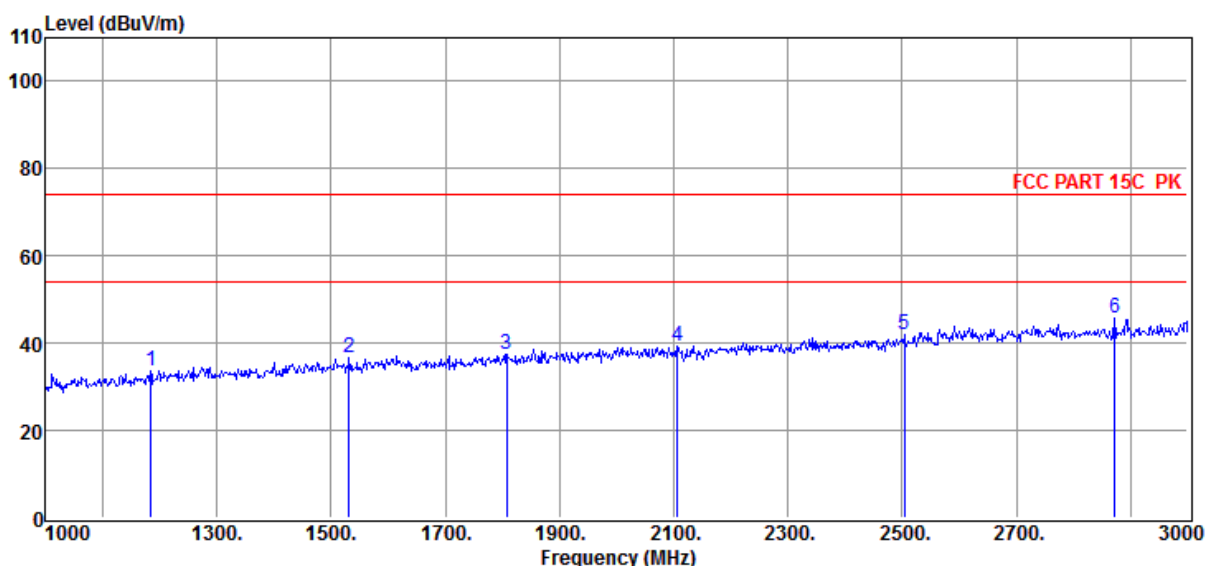

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1184.00	-5.64	33.74	74.00	-40.26	166	58	Peak	VERTICAL
2	1532.00	-2.64	36.52	74.00	-37.48	173	122	Peak	VERTICAL
3	1808.00	-1.00	37.32	74.00	-36.68	159	315	Peak	VERTICAL
4	2106.00	0.57	39.31	74.00	-34.69	184	297	Peak	VERTICAL
5	2504.00	3.73	41.94	74.00	-32.06	171	74	Peak	VERTICAL
6	2872.00	6.83	45.62	74.00	-28.38	181	340	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5180MHz

Data: 403

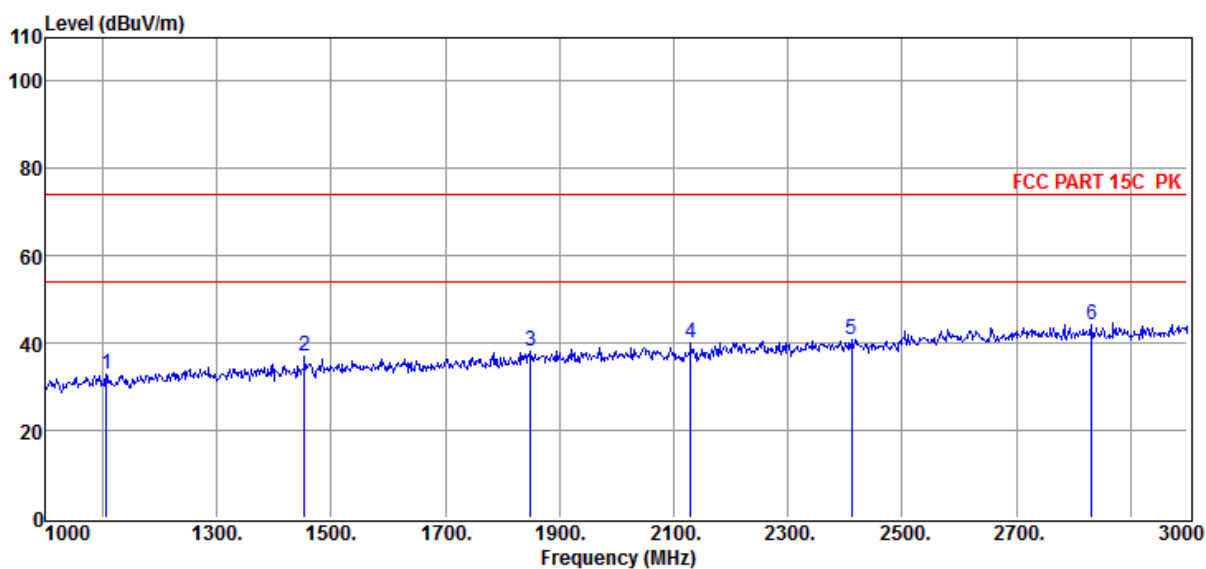

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1106.00	-6.69	32.85	74.00	-41.15	180	228	Peak	HORIZONTAL
2	1454.00	-3.44	36.97	74.00	-37.03	175	350	Peak	HORIZONTAL
3	1850.00	-0.33	38.15	74.00	-35.85	173	169	Peak	HORIZONTAL
4	2130.00	0.89	39.96	74.00	-34.04	183	325	Peak	HORIZONTAL
5	2412.00	3.32	40.74	74.00	-33.26	158	349	Peak	HORIZONTAL
6	2832.00	6.60	44.26	74.00	-29.74	159	16	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5200MHz

Data: 404

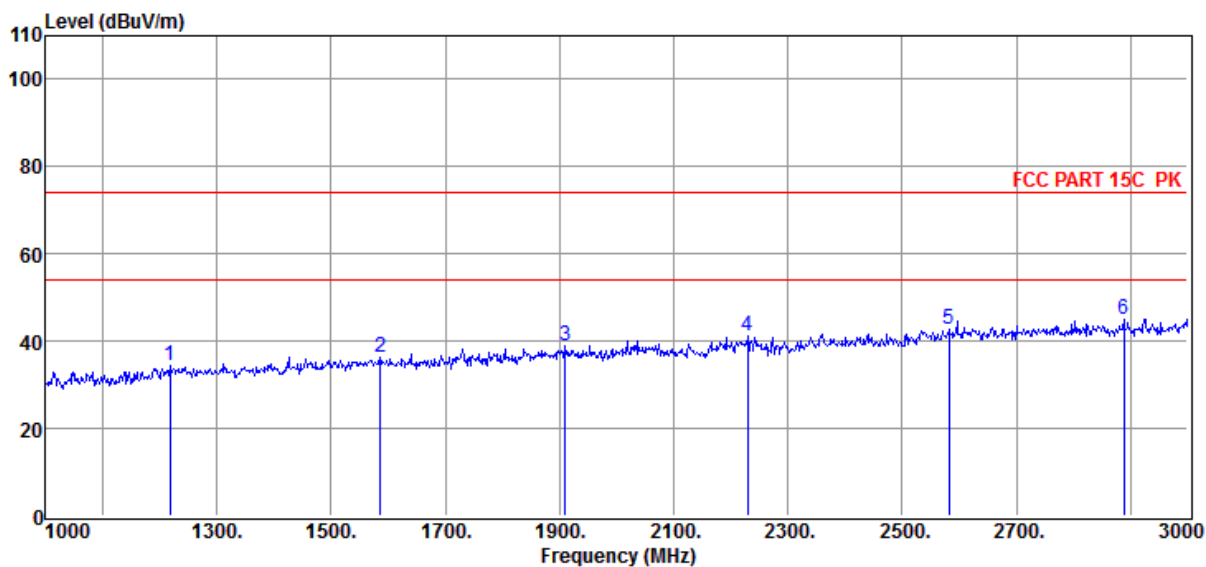

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1218.00	-5.11	34.28	74.00	-39.72	178	289	Peak	HORIZONTAL
2	1586.00	-2.33	36.11	74.00	-37.89	151	185	Peak	HORIZONTAL
3	1910.00	0.00	38.85	74.00	-35.15	183	236	Peak	HORIZONTAL
4	2230.00	2.37	41.02	74.00	-32.98	174	268	Peak	HORIZONTAL
5	2582.00	5.51	42.79	74.00	-31.21	174	318	Peak	HORIZONTAL
6	2888.00	6.92	44.89	74.00	-29.11	153	41	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5200MHz

Data: 405

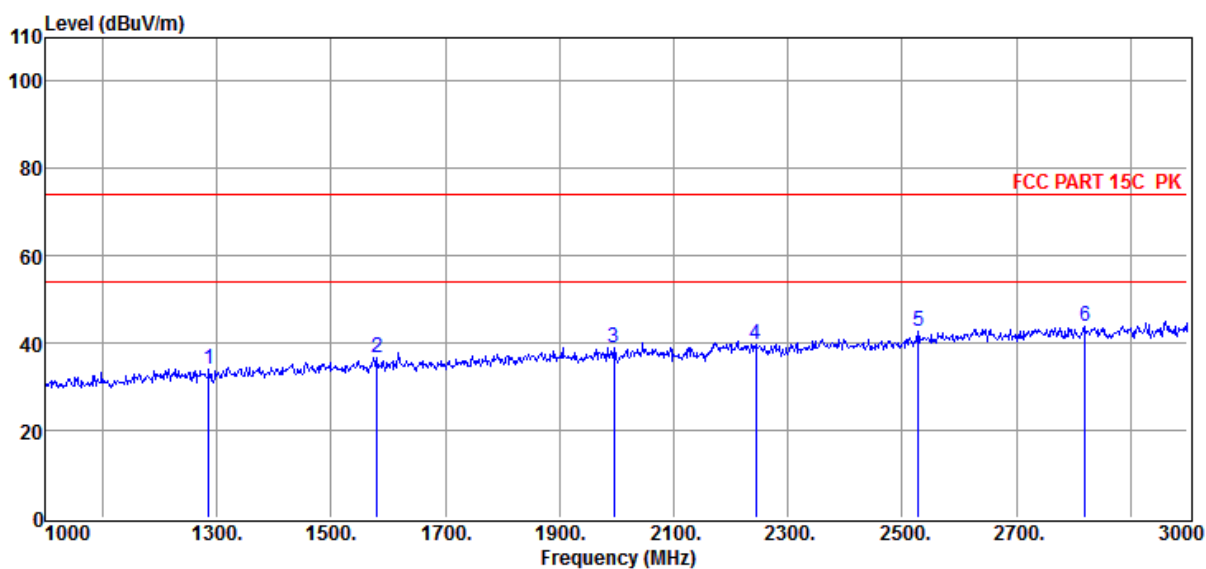

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1286.00	-4.70	34.18	74.00	-39.82	171	328	Peak	VERTICAL
2	1580.00	-2.35	36.82	74.00	-37.18	176	300	Peak	VERTICAL
3	1996.00	0.23	38.78	74.00	-35.22	174	247	Peak	VERTICAL
4	2244.00	2.37	39.64	74.00	-34.36	176	179	Peak	VERTICAL
5	2528.00	4.29	42.79	74.00	-31.21	190	164	Peak	VERTICAL
6	2820.00	6.51	43.86	74.00	-30.14	172	92	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5240MHz

Data: 406

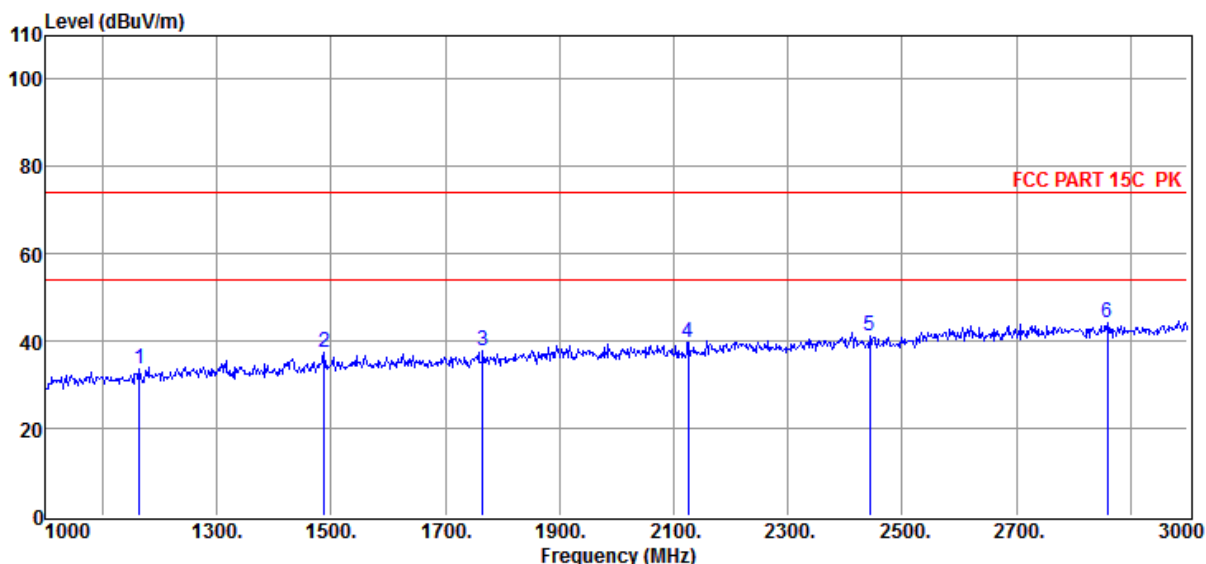

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1164.00	-6.04	33.67	74.00	-40.33	161	191	Peak	VERTICAL
2	1488.00	-3.08	37.27	74.00	-36.73	169	126	Peak	VERTICAL
3	1766.00	-1.34	37.96	74.00	-36.04	178	188	Peak	VERTICAL
4	2126.00	0.84	39.62	74.00	-34.38	158	284	Peak	VERTICAL
5	2444.00	3.29	41.12	74.00	-32.88	177	327	Peak	VERTICAL
6	2860.00	6.77	44.09	74.00	-29.91	168	277	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5240MHz

Data: 407

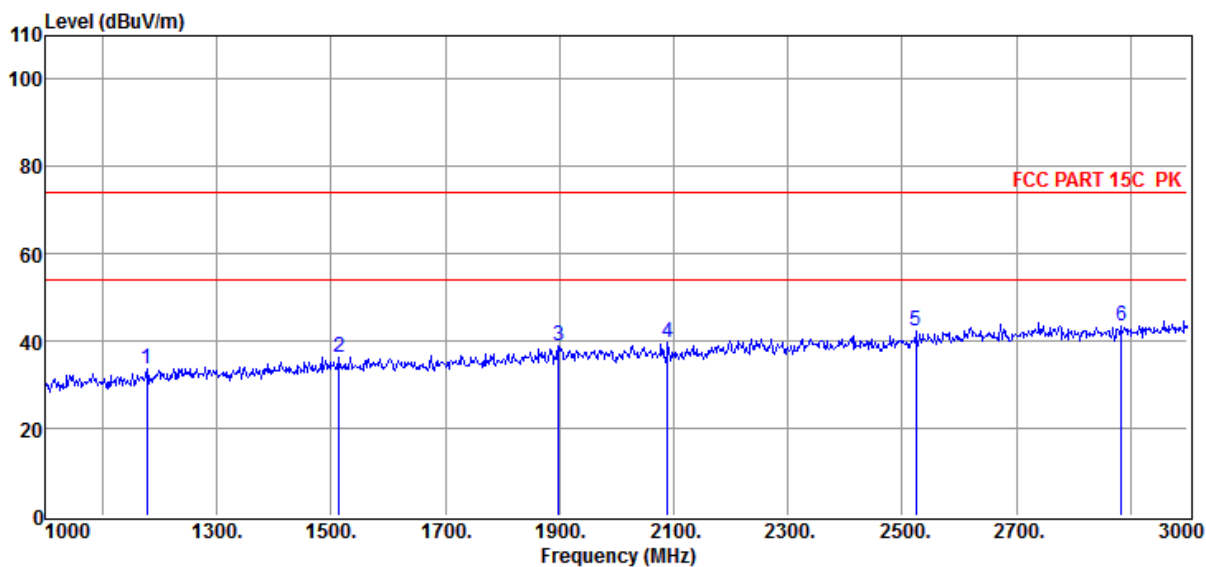

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1178.00	-5.76	33.75	74.00	-40.25	152	300	Peak	HORIZONTAL
2	1514.00	-2.82	36.34	74.00	-37.66	173	248	Peak	HORIZONTAL
3	1898.00	-0.08	38.88	74.00	-35.12	171	253	Peak	HORIZONTAL
4	2090.00	0.62	39.82	74.00	-34.18	151	153	Peak	HORIZONTAL
5	2524.00	4.19	42.22	74.00	-31.78	190	200	Peak	HORIZONTAL
6	2884.00	6.90	43.29	74.00	-30.71	169	345	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5260MHz

Data: 408

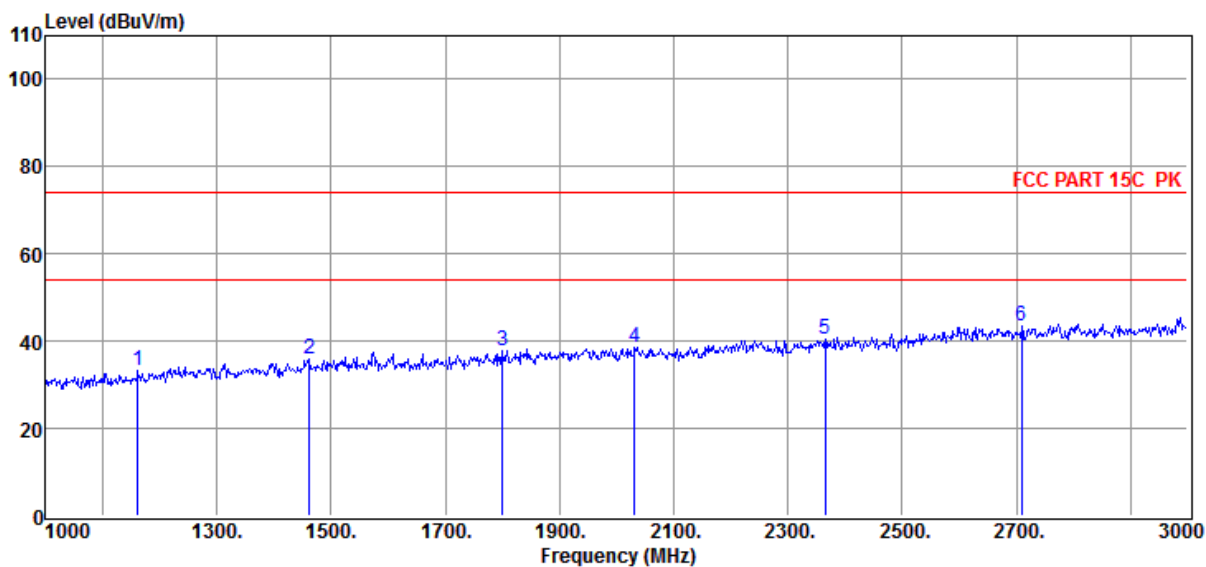

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1162.00	-6.08	33.30	74.00	-40.70	160	146	Peak	HORIZONTAL
2	1462.00	-3.35	36.09	74.00	-37.91	182	230	Peak	HORIZONTAL
3	1800.00	-1.13	37.87	74.00	-36.13	169	316	Peak	HORIZONTAL
4	2032.00	0.83	38.43	74.00	-35.57	184	42	Peak	HORIZONTAL
5	2366.00	3.23	40.42	74.00	-33.58	181	269	Peak	HORIZONTAL
6	2710.00	6.06	43.30	74.00	-30.70	178	231	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5260MHz

Data: 409

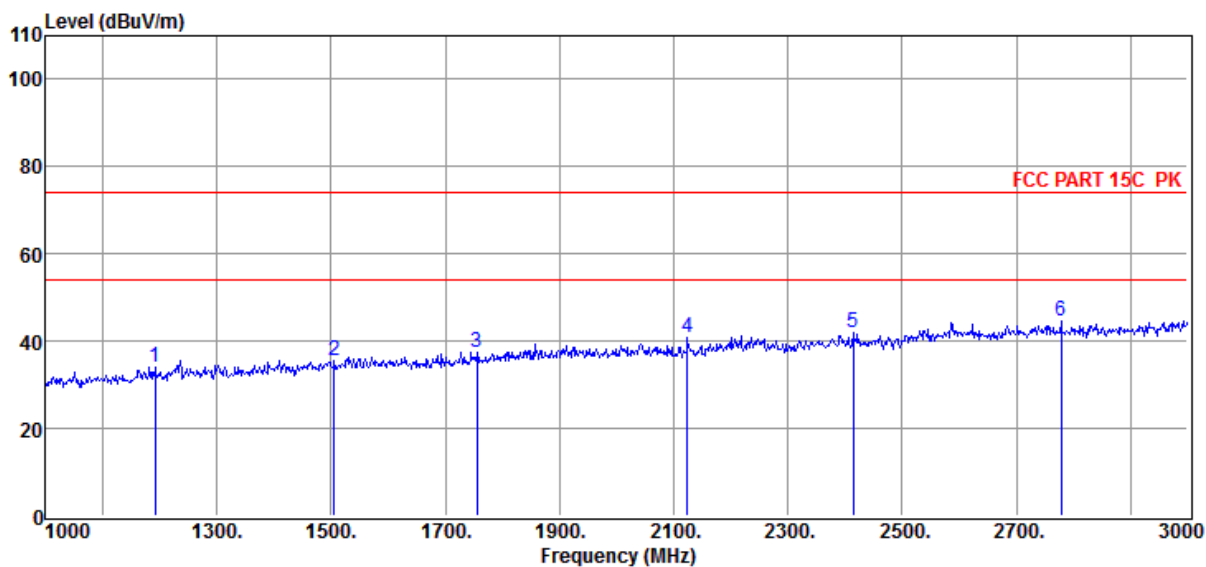

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1192.00	-5.48	33.98	74.00	-40.02	153	316	Peak	VERTICAL
2	1506.00	-2.89	35.48	74.00	-38.52	154	269	Peak	VERTICAL
3	1756.00	-1.40	37.43	74.00	-36.57	174	56	Peak	VERTICAL
4	2124.00	0.80	40.71	74.00	-33.29	173	203	Peak	VERTICAL
5	2414.00	3.31	41.82	74.00	-32.18	154	27	Peak	VERTICAL
6	2778.00	6.49	44.71	74.00	-29.29	165	305	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5280MHz

Data: 410

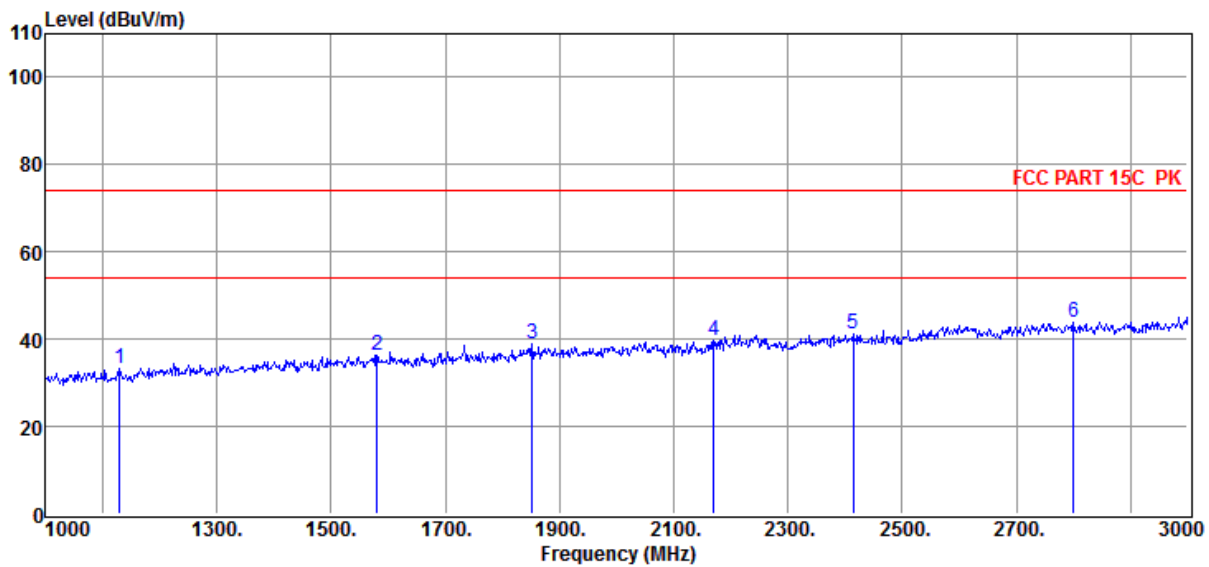

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1130.00	-6.49	33.35	74.00	-40.65	190	170	Peak	VERTICAL
2	1580.00	-2.35	36.43	74.00	-37.57	175	161	Peak	VERTICAL
3	1852.00	-0.32	38.99	74.00	-35.01	185	319	Peak	VERTICAL
4	2170.00	1.64	39.52	74.00	-34.48	187	99	Peak	VERTICAL
5	2414.00	3.31	41.17	74.00	-32.83	165	204	Peak	VERTICAL
6	2800.00	6.38	44.03	74.00	-29.97	157	280	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5280MHz

Data: 411

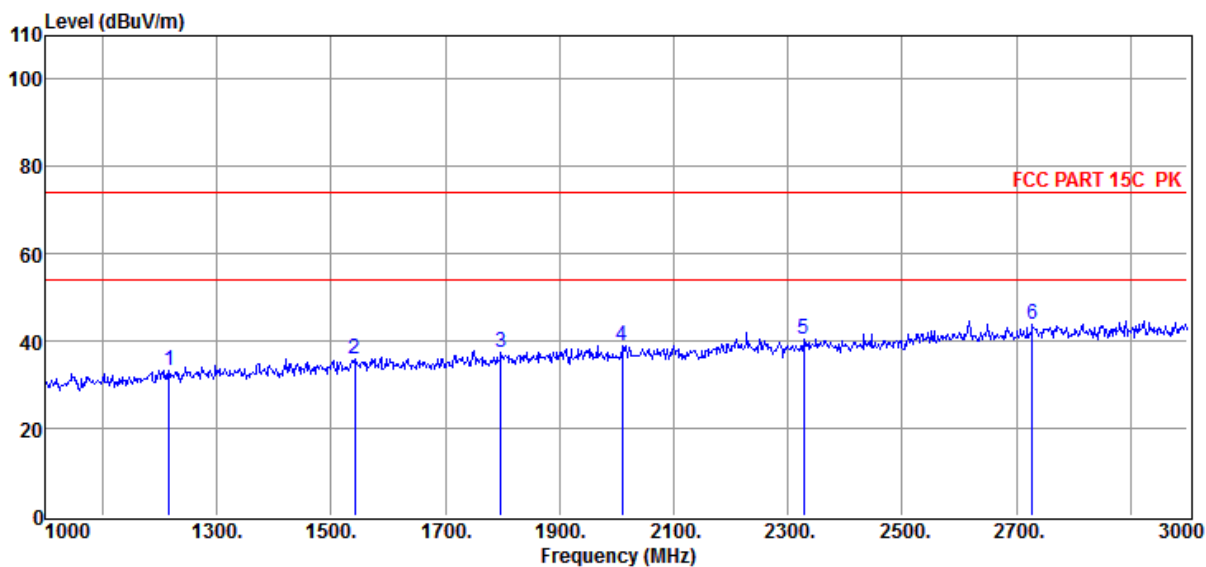

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1216.00	-5.13	33.31	74.00	-40.69	171	275	Peak	HORIZONTAL
2	1542.00	-2.54	35.95	74.00	-38.05	175	109	Peak	HORIZONTAL
3	1798.00	-1.14	37.39	74.00	-36.61	176	36	Peak	HORIZONTAL
4	2010.00	0.42	39.07	74.00	-34.93	159	58	Peak	HORIZONTAL
5	2328.00	2.62	40.36	74.00	-33.64	176	351	Peak	HORIZONTAL
6	2728.00	6.33	43.81	74.00	-30.19	157	121	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5320MHz

Data: 412

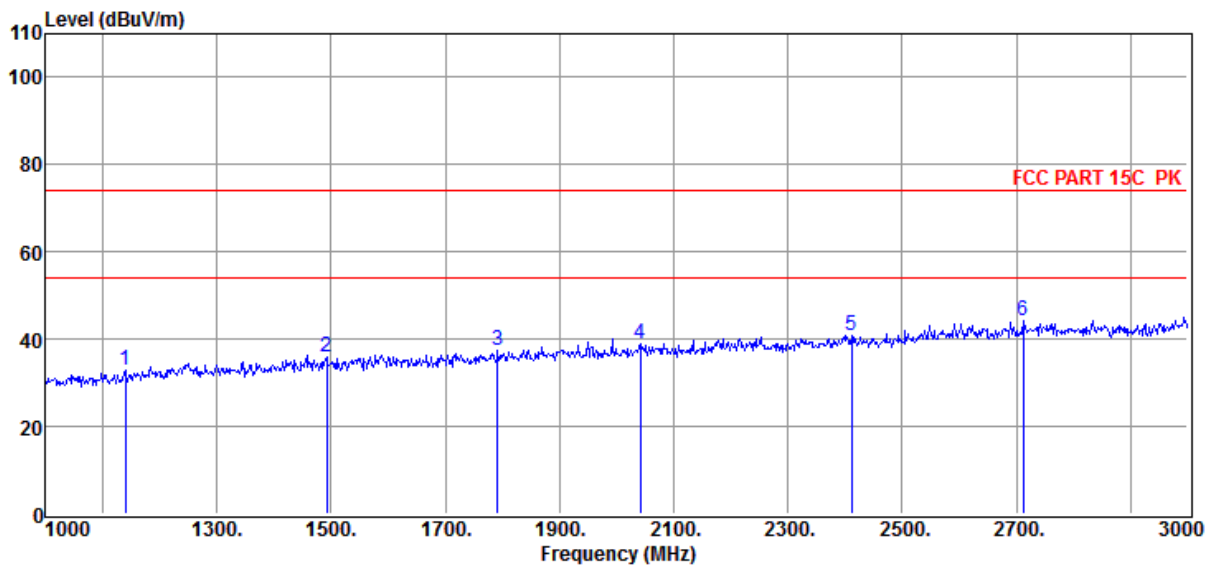

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1140.00	-6.41	33.03	74.00	-40.97	167	349	Peak	HORIZONTAL
2	1492.00	-3.03	36.01	74.00	-37.99	177	47	Peak	HORIZONTAL
3	1792.00	-1.18	37.54	74.00	-36.46	152	9	Peak	HORIZONTAL
4	2042.00	1.01	39.10	74.00	-34.90	156	108	Peak	HORIZONTAL
5	2412.00	3.32	40.81	74.00	-33.19	159	310	Peak	HORIZONTAL
6	2712.00	6.08	44.25	74.00	-29.75	151	355	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5320MHz

Data: 413

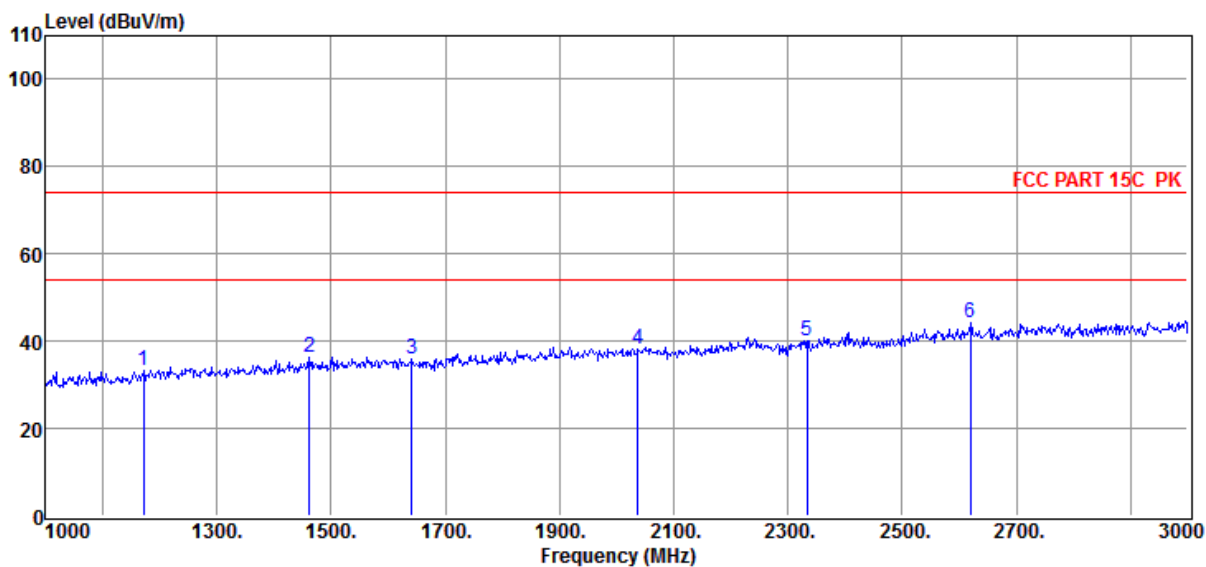

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1172.00	-5.88	33.26	74.00	-40.74	162	6	Peak	VERTICAL
2	1462.00	-3.35	36.22	74.00	-37.78	173	121	Peak	VERTICAL
3	1642.00	-2.34	36.07	74.00	-37.93	158	7	Peak	VERTICAL
4	2038.00	0.93	38.36	74.00	-35.64	187	174	Peak	VERTICAL
5	2334.00	2.78	40.04	74.00	-33.96	181	277	Peak	VERTICAL
6	2620.00	5.67	44.29	74.00	-29.71	150	54	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5500MHz

Data: 414

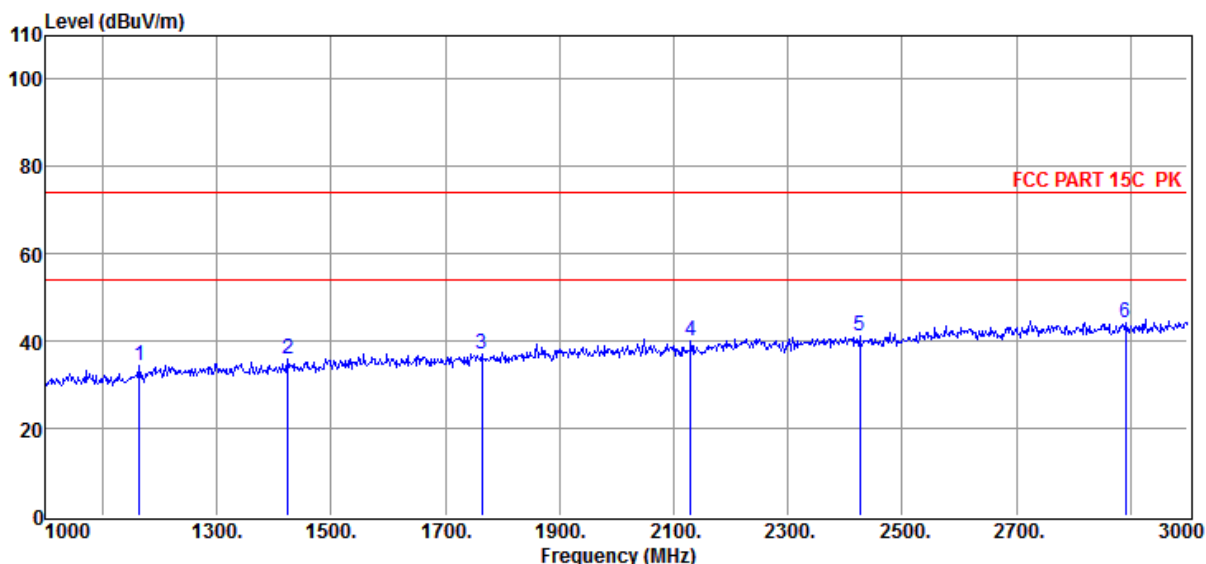

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1164.00	-6.04	34.32	74.00	-39.68	174	78	Peak	VERTICAL
2	1424.00	-3.80	36.03	74.00	-37.97	153	259	Peak	VERTICAL
3	1764.00	-1.36	37.12	74.00	-36.88	156	357	Peak	VERTICAL
4	2130.00	0.89	39.95	74.00	-34.05	161	149	Peak	VERTICAL
5	2426.00	3.31	41.05	74.00	-32.95	178	32	Peak	VERTICAL
6	2892.00	6.94	44.33	74.00	-29.67	159	84	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5500MHz

Data: 415

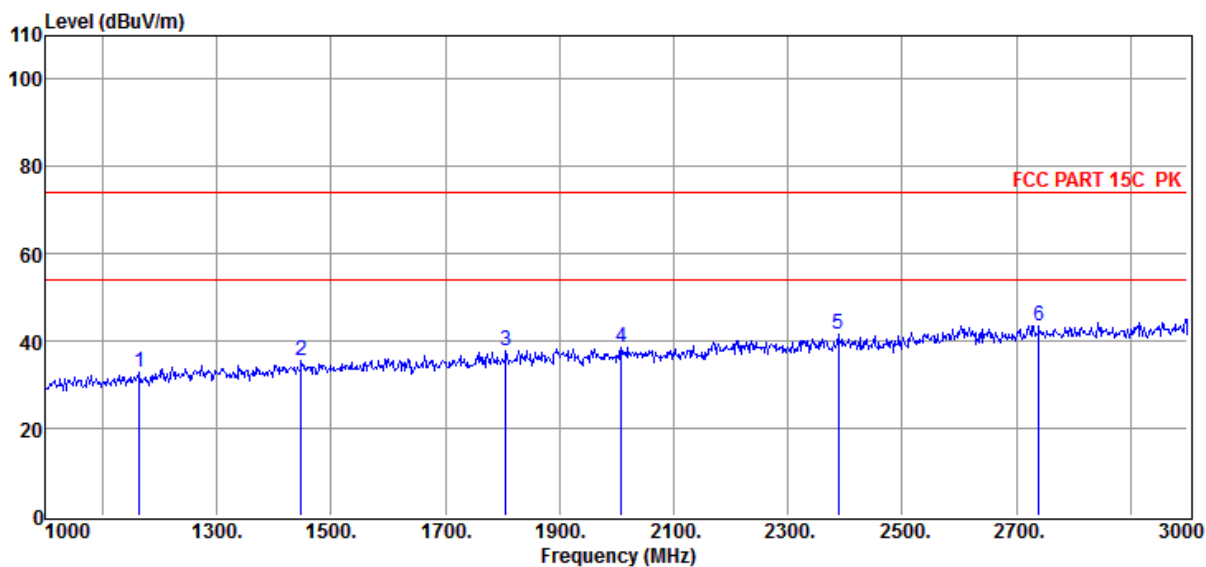

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1164.00	-6.04	32.73	74.00	-41.27	161	267	Peak	HORIZONTAL
2	1448.00	-3.50	35.61	74.00	-38.39	181	32	Peak	HORIZONTAL
3	1806.00	-1.03	37.82	74.00	-36.18	163	66	Peak	HORIZONTAL
4	2008.00	0.38	38.50	74.00	-35.50	159	348	Peak	HORIZONTAL
5	2388.00	3.30	41.75	74.00	-32.25	155	26	Peak	HORIZONTAL
6	2740.00	6.50	43.55	74.00	-30.45	168	142	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5580MHz

Data: 416

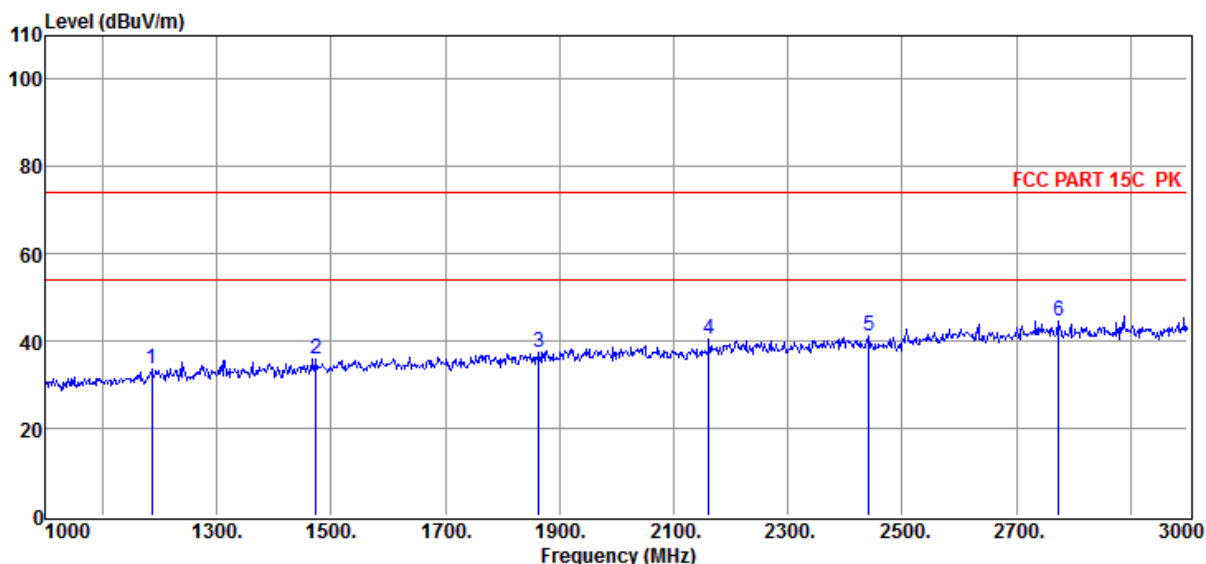

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1186.00	-5.60	33.47	74.00	-40.53	166	237	Peak	HORIZONTAL
2	1474.00	-3.23	36.05	74.00	-37.95	186	161	Peak	HORIZONTAL
3	1864.00	-0.26	37.25	74.00	-36.75	178	221	Peak	HORIZONTAL
4	2162.00	1.44	40.35	74.00	-33.65	182	350	Peak	HORIZONTAL
5	2442.00	3.29	41.16	74.00	-32.84	169	306	Peak	HORIZONTAL
6	2774.00	6.52	44.65	74.00	-29.35	154	176	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5580MHz

Data: 417

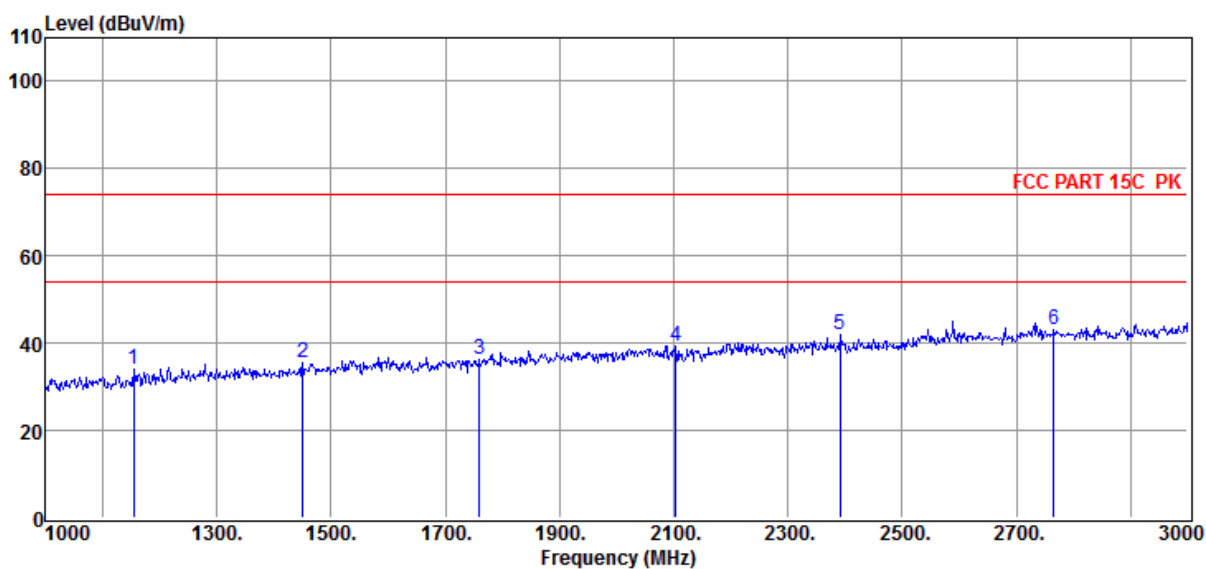

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1154.00	-6.24	33.93	74.00	-40.07	165	151	Peak	VERTICAL
2	1450.00	-3.48	35.42	74.00	-38.58	160	43	Peak	VERTICAL
3	1760.00	-1.38	36.38	74.00	-37.62	168	300	Peak	VERTICAL
4	2104.00	0.54	39.30	74.00	-34.70	172	205	Peak	VERTICAL
5	2392.00	3.31	42.05	74.00	-31.95	171	298	Peak	VERTICAL
6	2766.00	6.57	43.21	74.00	-30.79	187	191	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5700MHz

Data: 418

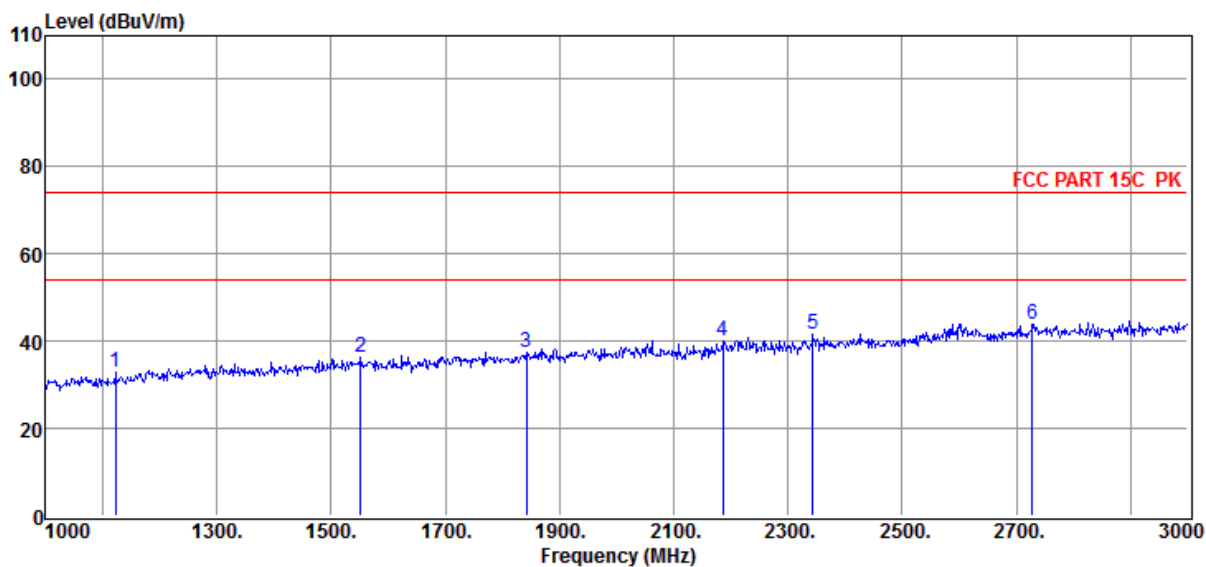

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1122.00	-6.56	32.89	74.00	-41.11	154	74	Peak	VERTICAL
2	1552.00	-2.45	36.10	74.00	-37.90	184	354	Peak	VERTICAL
3	1842.00	-0.46	37.35	74.00	-36.65	158	76	Peak	VERTICAL
4	2186.00	2.03	40.06	74.00	-33.94	185	15	Peak	VERTICAL
5	2344.00	3.04	41.72	74.00	-32.28	178	53	Peak	VERTICAL
6	2728.00	6.33	43.81	74.00	-30.19	171	226	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5700MHz

Data: 419

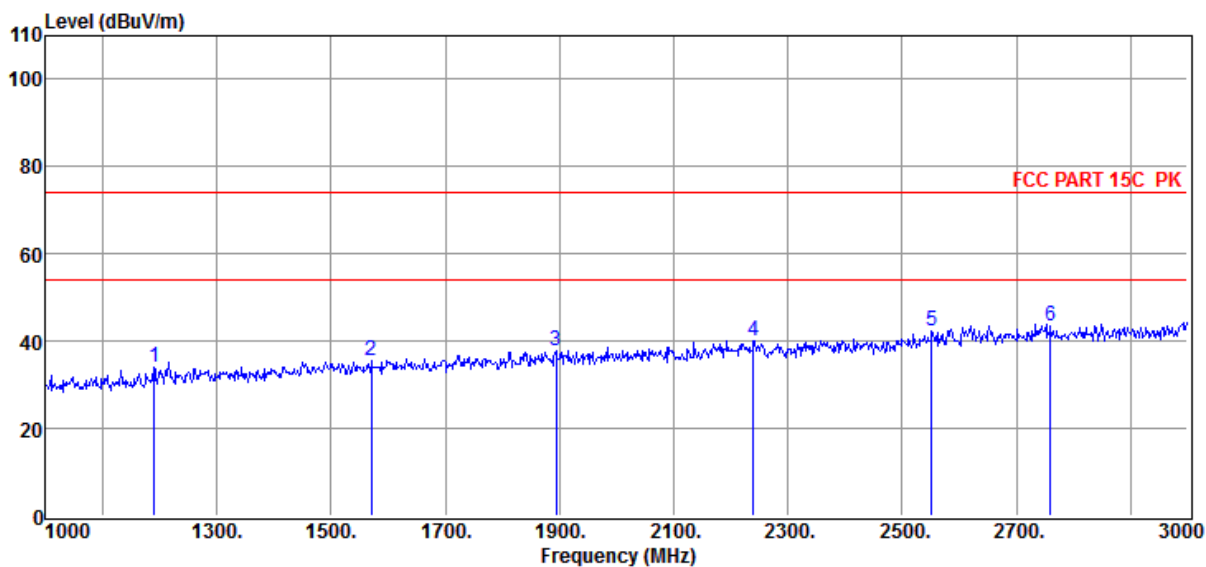

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1190.00	-5.52	34.07	74.00	-39.93	156	162	Peak	HORIZONTAL
2	1570.00	-2.39	35.69	74.00	-38.31	189	105	Peak	HORIZONTAL
3	1894.00	-0.10	37.84	74.00	-36.16	161	64	Peak	HORIZONTAL
4	2240.00	2.37	40.04	74.00	-33.96	151	67	Peak	HORIZONTAL
5	2552.00	4.83	42.15	74.00	-31.85	167	311	Peak	HORIZONTAL
6	2760.00	6.60	43.65	74.00	-30.35	183	149	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5745MHz

Data: 420

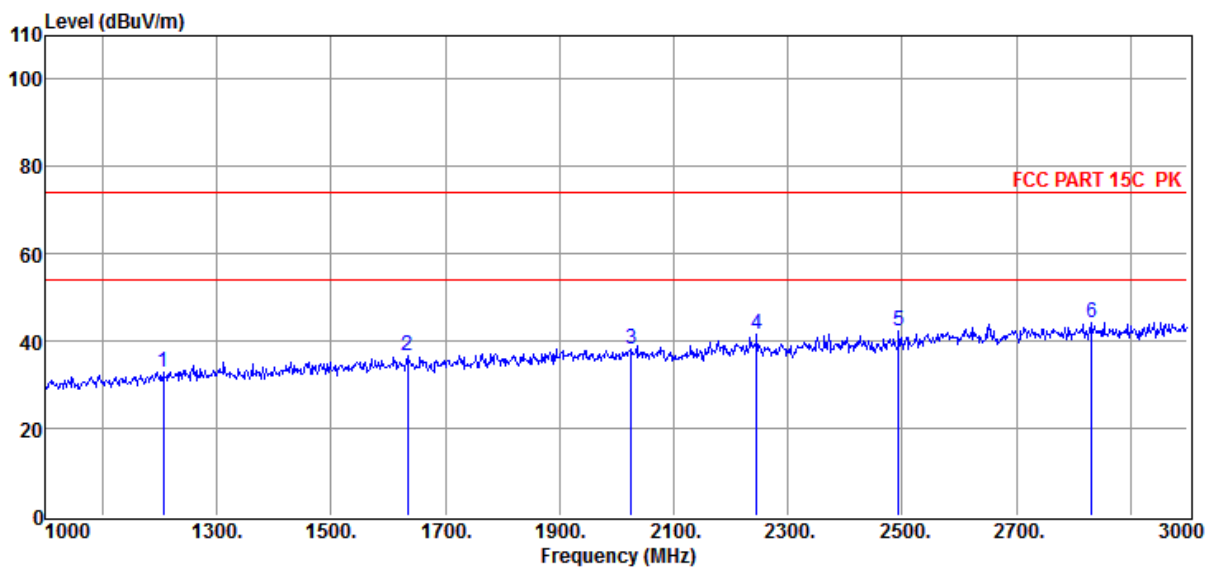

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1206.00	-5.25	33.05	74.00	-40.95	184	355	Peak	HORIZONTAL
2	1634.00	-2.32	36.79	74.00	-37.21	156	259	Peak	HORIZONTAL
3	2026.00	0.71	37.99	74.00	-36.01	168	221	Peak	HORIZONTAL
4	2246.00	2.37	41.68	74.00	-32.32	159	147	Peak	HORIZONTAL
5	2494.00	3.59	42.32	74.00	-31.68	155	37	Peak	HORIZONTAL
6	2832.00	6.60	44.32	74.00	-29.68	162	164	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5745MHz

Data: 421

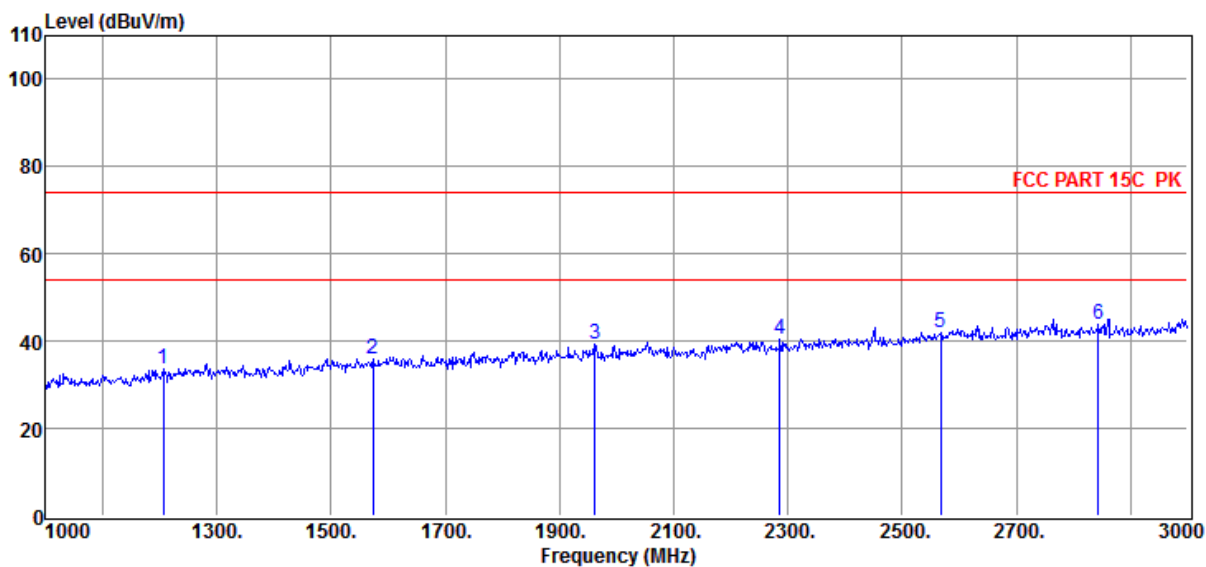

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1206.00	-5.25	33.61	74.00	-40.39	178	313	Peak	VERTICAL
2	1574.00	-2.37	36.00	74.00	-38.00	153	331	Peak	VERTICAL
3	1962.00	0.28	39.36	74.00	-34.64	167	282	Peak	VERTICAL
4	2286.00	2.03	40.32	74.00	-33.68	153	264	Peak	VERTICAL
5	2568.00	5.19	41.91	74.00	-32.09	175	123	Peak	VERTICAL
6	2844.00	6.67	44.03	74.00	-29.97	179	37	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5785MHz

Data: 422

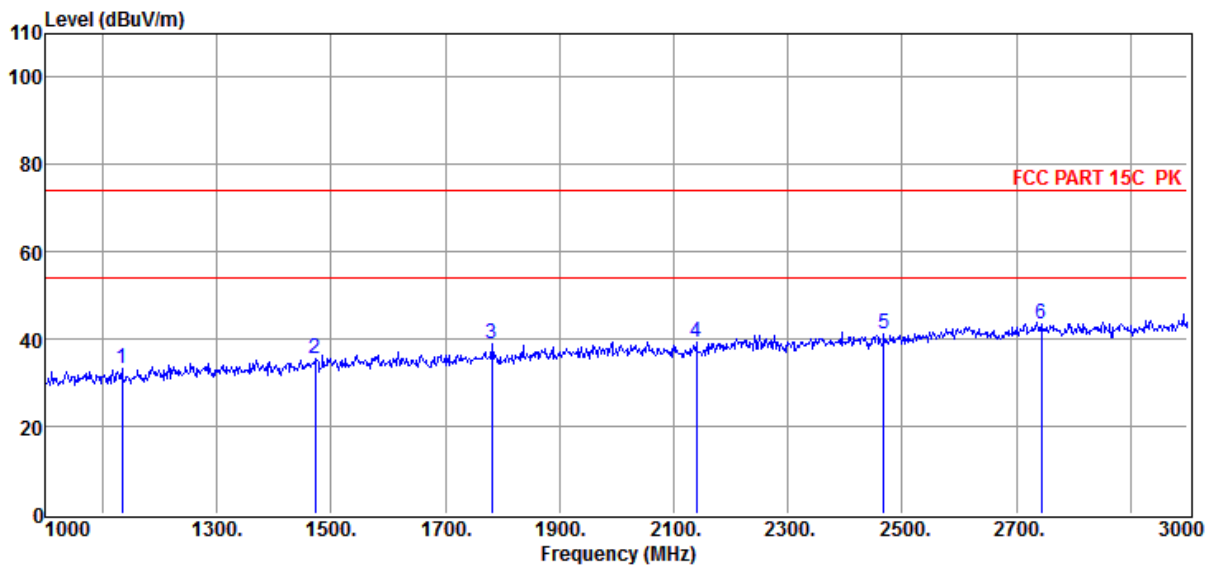

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1134.00	-6.46	33.10	74.00	-40.90	169	14	Peak	VERTICAL
2	1472.00	-3.25	35.69	74.00	-38.31	172	312	Peak	VERTICAL
3	1782.00	-1.24	38.80	74.00	-35.20	165	12	Peak	VERTICAL
4	2140.00	1.02	39.19	74.00	-34.81	173	236	Peak	VERTICAL
5	2468.00	3.42	41.10	74.00	-32.90	183	3	Peak	VERTICAL
6	2744.00	6.56	43.57	74.00	-30.43	156	295	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5785MHz

Data: 423

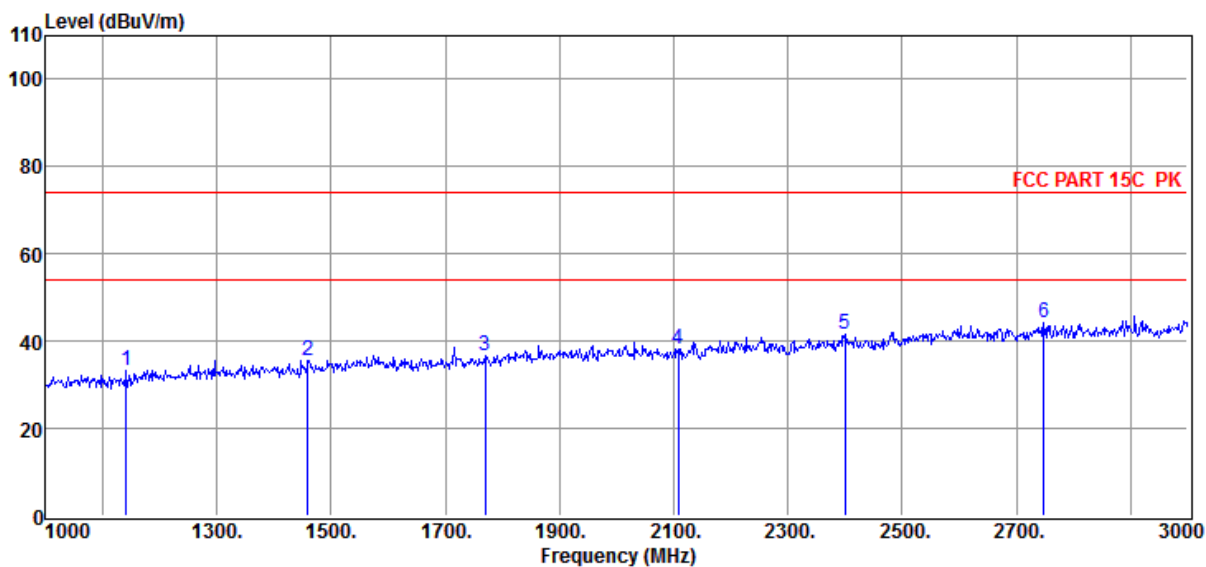

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1142.00	-6.39	33.10	74.00	-40.90	184	124	Peak	HORIZONTAL
2	1460.00	-3.37	35.46	74.00	-38.54	154	226	Peak	HORIZONTAL
3	1770.00	-1.32	36.74	74.00	-37.26	163	210	Peak	HORIZONTAL
4	2108.00	0.59	38.35	74.00	-35.65	171	261	Peak	HORIZONTAL
5	2400.00	3.33	41.51	74.00	-32.49	170	231	Peak	HORIZONTAL
6	2748.00	6.62	44.32	74.00	-29.68	189	14	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 5825MHz

Data: 424

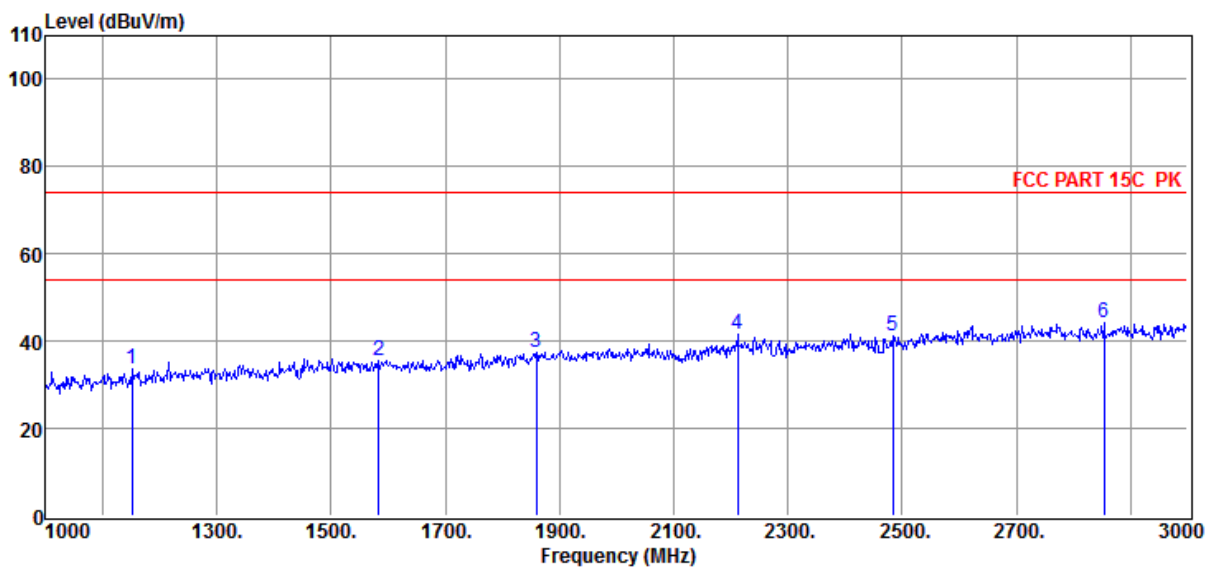

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1152.00	-6.28	33.70	74.00	-40.30	162	213	Peak	HORIZONTAL
2	1584.00	-2.33	35.66	74.00	-38.34	177	324	Peak	HORIZONTAL
3	1860.00	-0.28	37.38	74.00	-36.62	182	61	Peak	HORIZONTAL
4	2212.00	2.37	41.60	74.00	-32.40	169	273	Peak	HORIZONTAL
5	2484.00	3.52	41.09	74.00	-32.91	162	309	Peak	HORIZONTAL
6	2854.00	6.73	44.10	74.00	-29.90	155	23	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 5825MHz

Data: 425

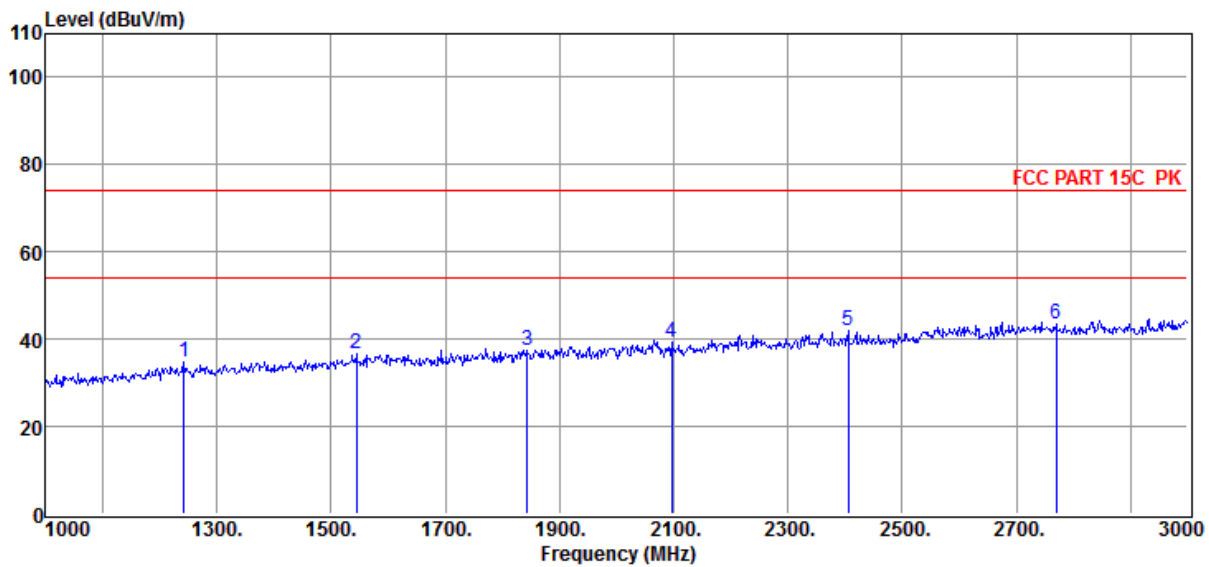

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1242.00	-4.81	34.85	74.00	-39.15	188	193	Peak	VERTICAL
2	1544.00	-2.52	36.74	74.00	-37.26	187	216	Peak	VERTICAL
3	1844.00	-0.43	37.60	74.00	-36.40	162	215	Peak	VERTICAL
4	2096.00	0.55	39.31	74.00	-34.69	171	300	Peak	VERTICAL
5	2406.00	3.33	41.93	74.00	-32.07	188	174	Peak	VERTICAL
6	2770.00	6.54	43.42	74.00	-30.58	157	297	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 5190MHz

Data: 426

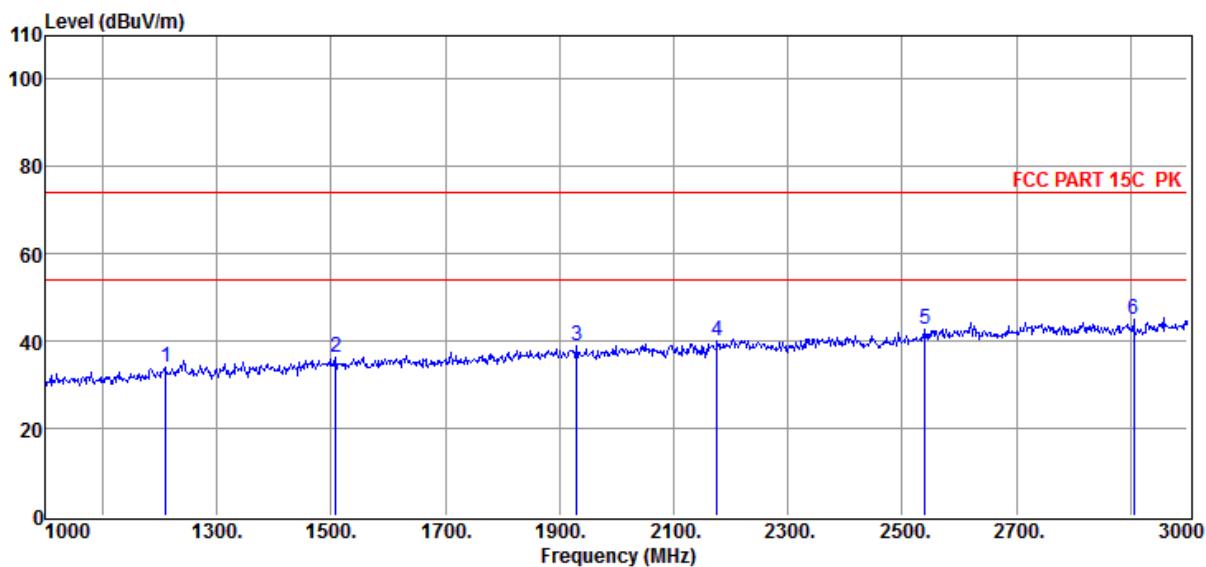

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1210.00	-5.20	34.10	74.00	-39.90	178	32	Peak	VERTICAL
2	1508.00	-2.87	36.28	74.00	-37.72	173	116	Peak	VERTICAL
3	1930.00	0.15	38.78	74.00	-35.22	158	86	Peak	VERTICAL
4	2176.00	1.78	40.18	74.00	-33.82	169	212	Peak	VERTICAL
5	2540.00	4.56	42.69	74.00	-31.31	178	342	Peak	VERTICAL
6	2906.00	6.94	44.91	74.00	-29.09	154	102	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 5190MHz

Data: 427

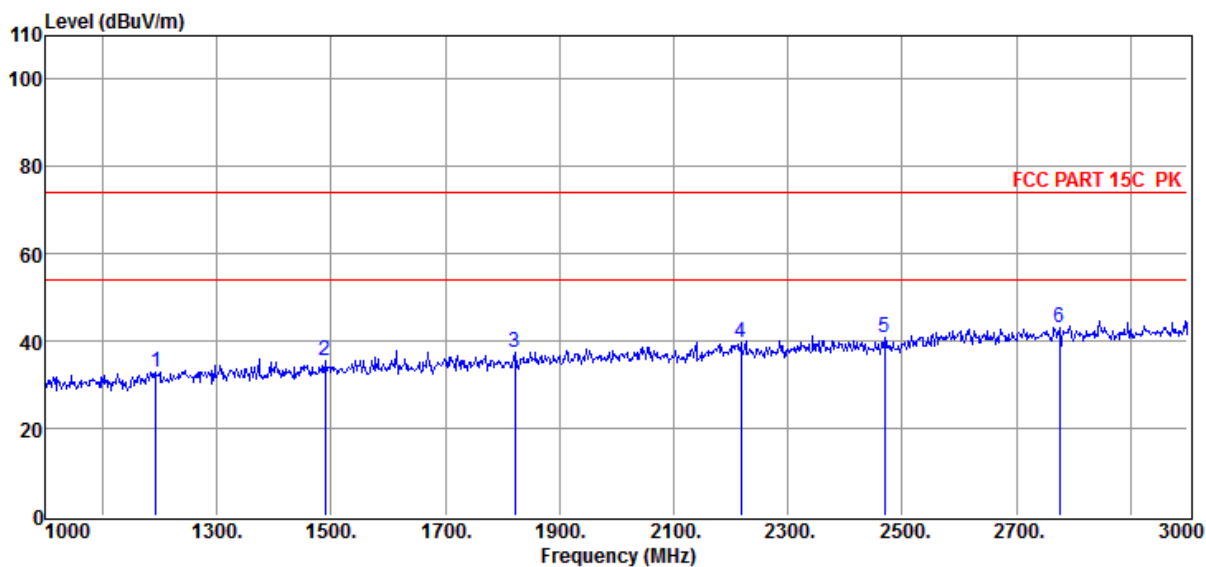

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1194.00	-5.44	33.02	74.00	-40.98	175	174	Peak	HORIZONTAL
2	1490.00	-3.06	35.61	74.00	-38.39	183	75	Peak	HORIZONTAL
3	1822.00	-0.78	37.51	74.00	-36.49	154	193	Peak	HORIZONTAL
4	2218.00	2.37	39.57	74.00	-34.43	173	23	Peak	HORIZONTAL
5	2470.00	3.43	41.00	74.00	-33.00	188	170	Peak	HORIZONTAL
6	2776.00	6.51	43.18	74.00	-30.82	150	48	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 5230MHz

Data: 428

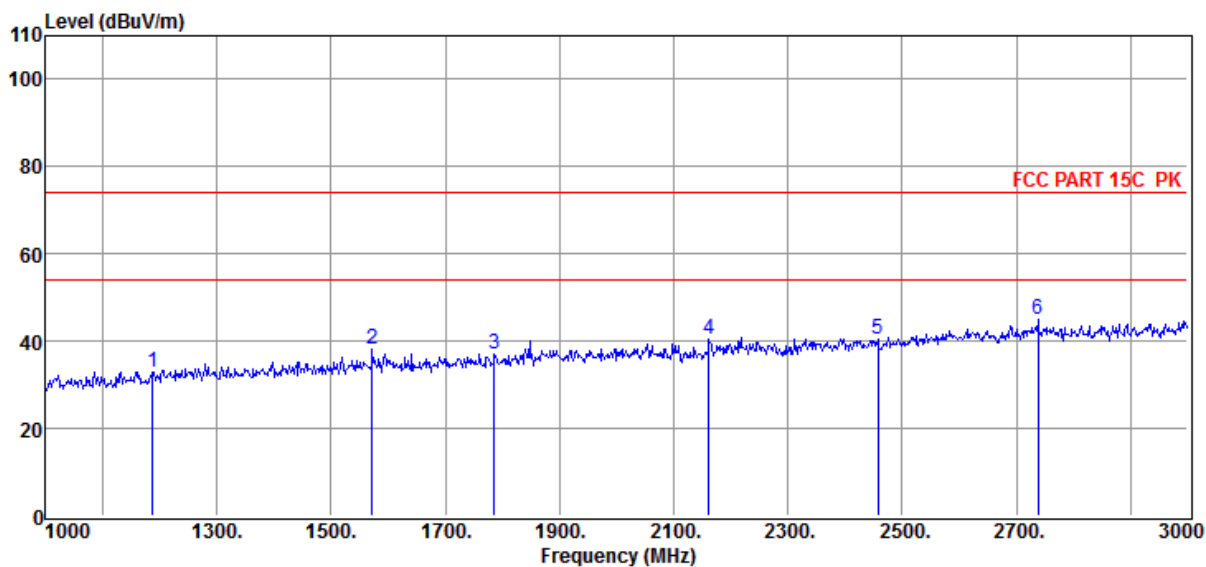

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1188.00	-5.56	33.06	74.00	-40.94	151	221	Peak	HORIZONTAL
2	1572.00	-2.38	38.02	74.00	-35.98	185	92	Peak	HORIZONTAL
3	1786.00	-1.21	37.13	74.00	-36.87	190	37	Peak	HORIZONTAL
4	2162.00	1.44	40.31	74.00	-33.69	186	138	Peak	HORIZONTAL
5	2458.00	3.35	40.62	74.00	-33.38	155	93	Peak	HORIZONTAL
6	2738.00	6.48	45.17	74.00	-28.83	173	27	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3'C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 5230MHz

Data: 429

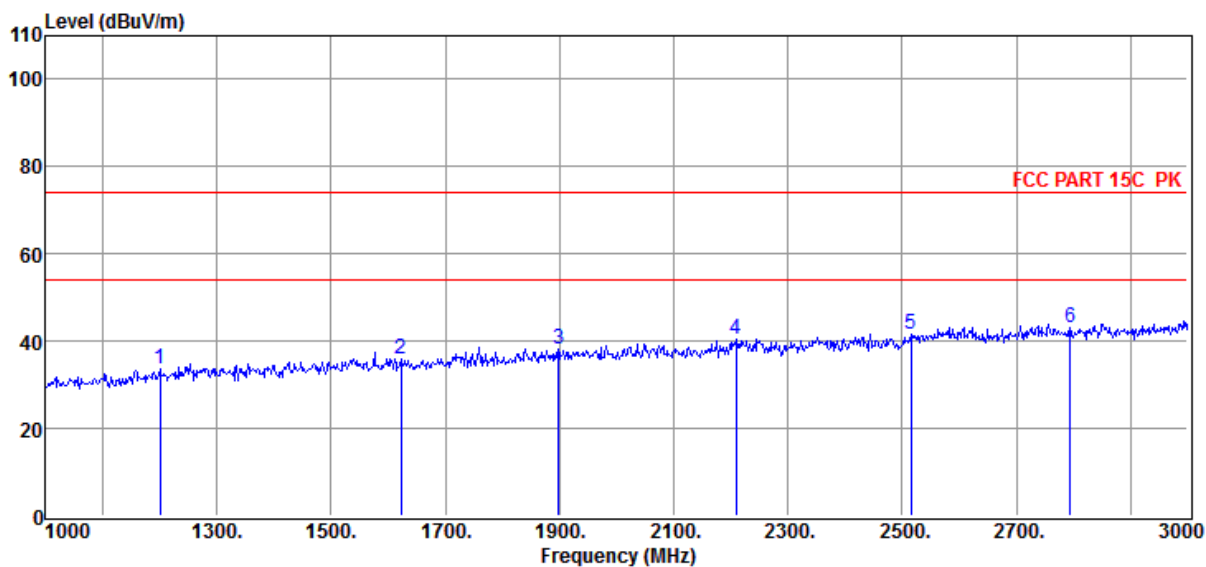

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1200.00	-5.32	33.75	74.00	-40.25	166	260	Peak	VERTICAL
2	1622.00	-2.31	35.99	74.00	-38.01	190	121	Peak	VERTICAL
3	1898.00	-0.08	38.05	74.00	-35.95	171	288	Peak	VERTICAL
4	2210.00	2.37	40.49	74.00	-33.51	171	338	Peak	VERTICAL
5	2516.00	4.01	41.50	74.00	-32.50	154	212	Peak	VERTICAL
6	2794.00	6.41	43.14	74.00	-30.86	157	107	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 5270MHz

Data: 430

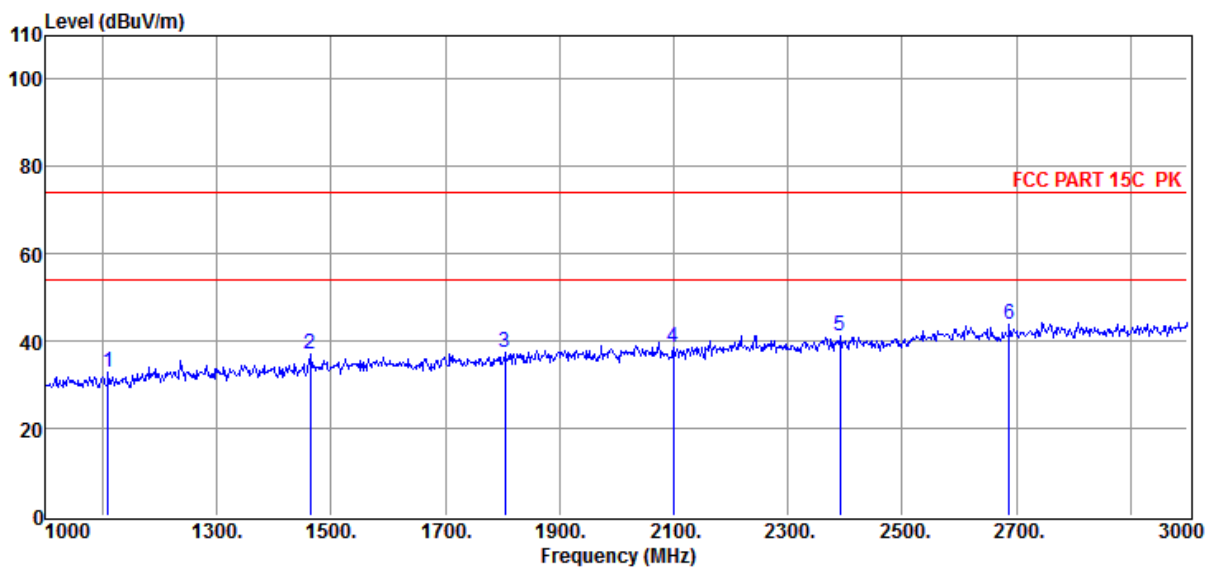

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1110.00	-6.66	32.99	74.00	-41.01	189	356	Peak	VERTICAL
2	1464.00	-3.33	36.90	74.00	-37.10	179	246	Peak	VERTICAL
3	1804.00	-1.07	37.24	74.00	-36.76	153	188	Peak	VERTICAL
4	2100.00	0.49	38.74	74.00	-35.26	184	294	Peak	VERTICAL
5	2392.00	3.31	41.19	74.00	-32.81	156	353	Peak	VERTICAL
6	2688.00	5.76	43.70	74.00	-30.30	161	139	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 5270MHz

Data: 431

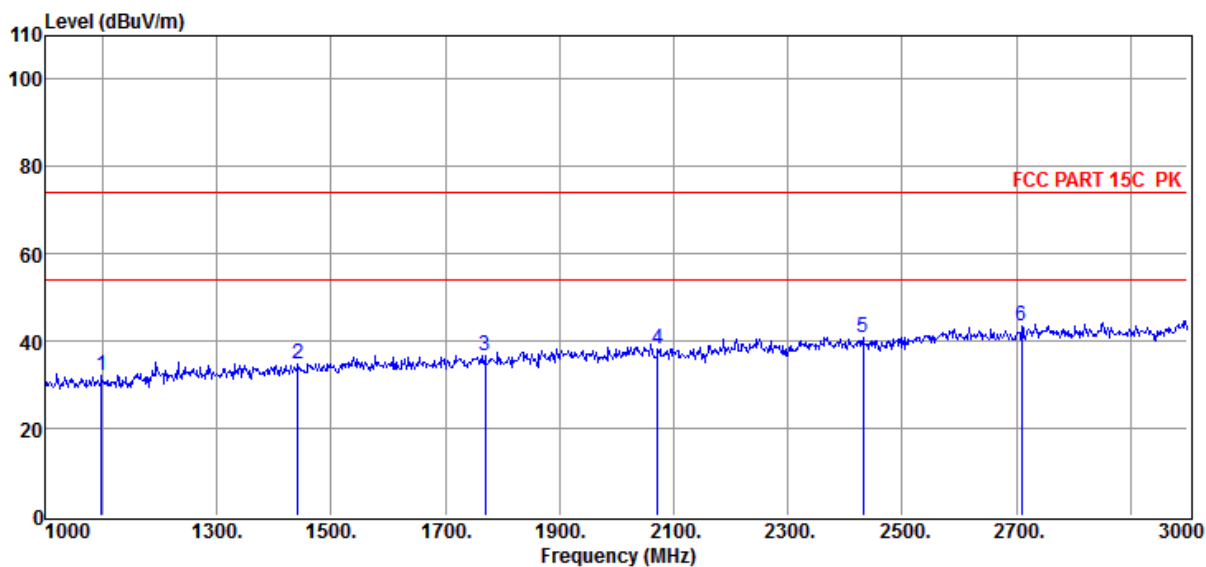

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1098.00	-6.75	31.97	74.00	-42.03	177	69	Peak	HORIZONTAL
2	1442.00	-3.58	34.83	74.00	-39.17	175	84	Peak	HORIZONTAL
3	1770.00	-1.32	36.55	74.00	-37.45	173	229	Peak	HORIZONTAL
4	2072.00	0.87	38.31	74.00	-35.69	188	293	Peak	HORIZONTAL
5	2432.00	3.30	40.66	74.00	-33.34	159	218	Peak	HORIZONTAL
6	2710.00	6.06	43.52	74.00	-30.48	186	360	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 5310MHz

Data: 432

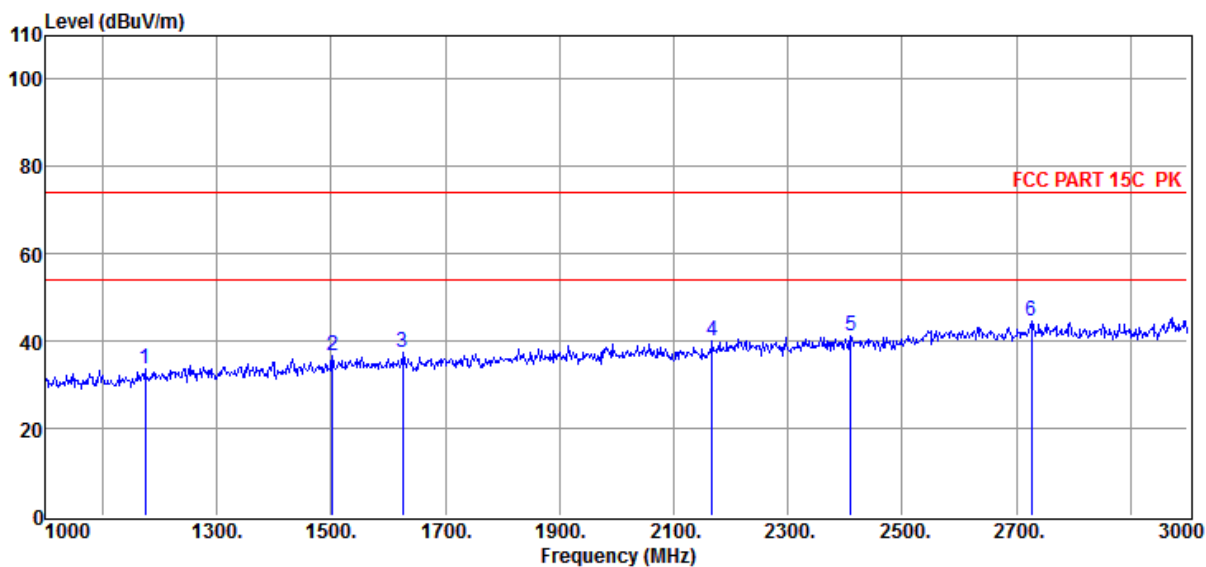

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1174.00	-5.84	33.49	74.00	-40.51	171	267	Peak	HORIZONTAL
2	1502.00	-2.93	36.73	74.00	-37.27	188	300	Peak	HORIZONTAL
3	1626.00	-2.32	37.44	74.00	-36.56	162	20	Peak	HORIZONTAL
4	2168.00	1.59	39.96	74.00	-34.04	160	128	Peak	HORIZONTAL
5	2410.00	3.32	41.09	74.00	-32.91	167	201	Peak	HORIZONTAL
6	2726.00	6.29	44.55	74.00	-29.45	175	326	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 5310MHz

Data: 433

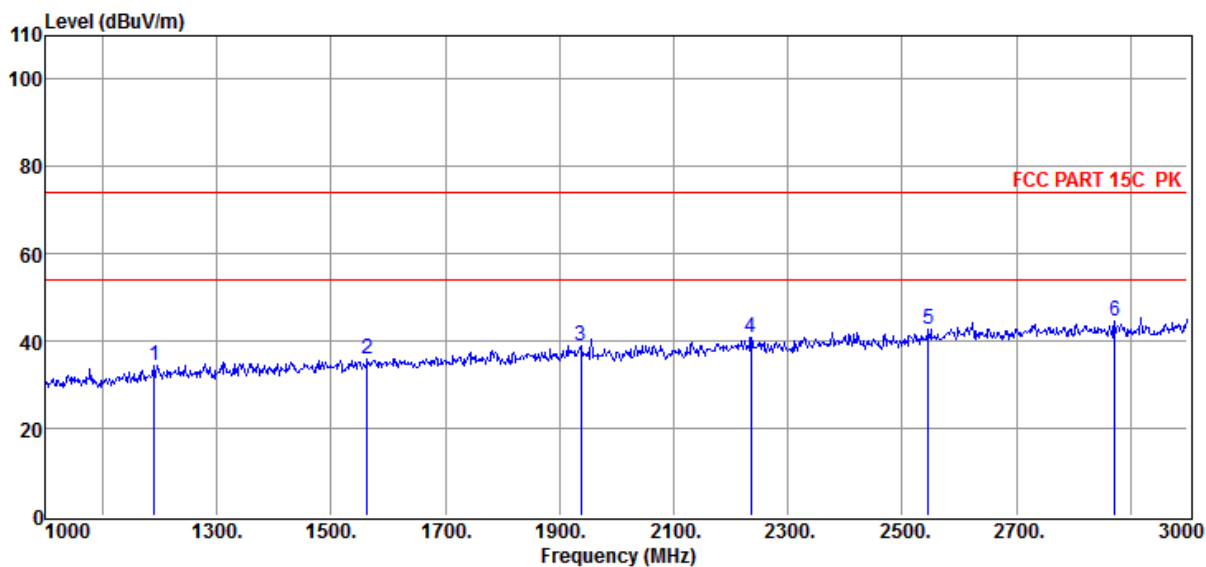

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1190.00	-5.52	34.49	74.00	-39.51	162	262	Peak	VERTICAL
2	1564.00	-2.41	36.00	74.00	-38.00	187	334	Peak	VERTICAL
3	1938.00	0.22	39.12	74.00	-34.88	154	168	Peak	VERTICAL
4	2236.00	2.37	40.95	74.00	-33.05	183	154	Peak	VERTICAL
5	2546.00	4.70	42.66	74.00	-31.34	156	322	Peak	VERTICAL
6	2872.00	6.83	44.69	74.00	-29.31	185	336	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 5510MHz

Data: 434

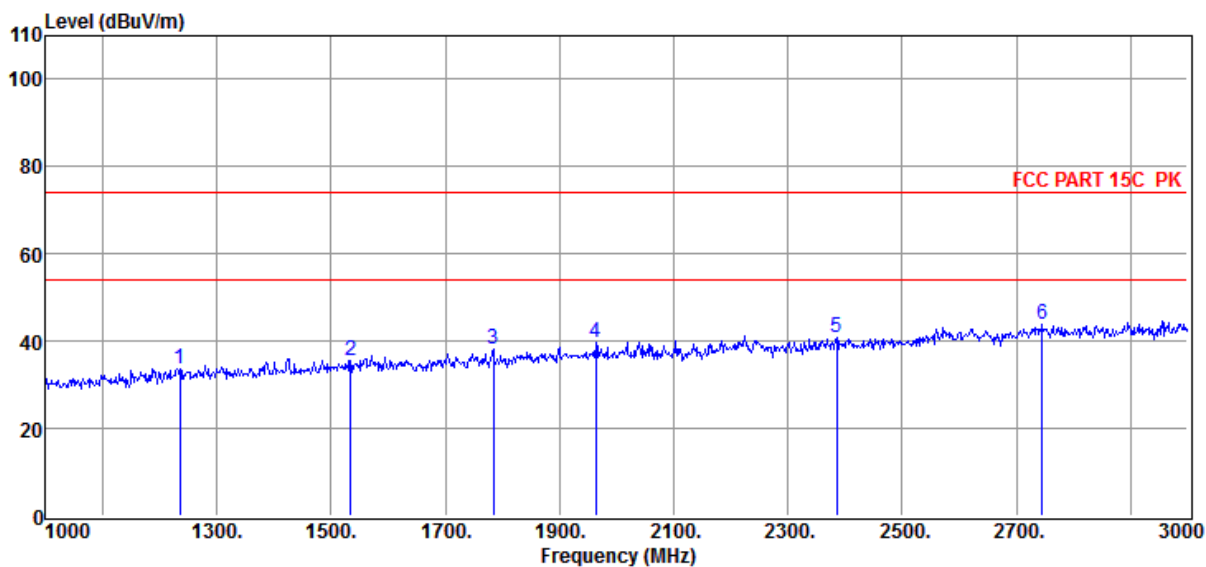

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1236.00	-4.89	33.70	74.00	-40.30	160	215	Peak	VERTICAL
2	1534.00	-2.62	35.64	74.00	-38.36	154	220	Peak	VERTICAL
3	1784.00	-1.23	38.02	74.00	-35.98	169	182	Peak	VERTICAL
4	1964.00	0.28	39.84	74.00	-34.16	173	71	Peak	VERTICAL
5	2386.00	3.29	40.91	74.00	-33.09	161	144	Peak	VERTICAL
6	2746.00	6.59	43.91	74.00	-30.09	181	300	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 5510MHz

Data: 435

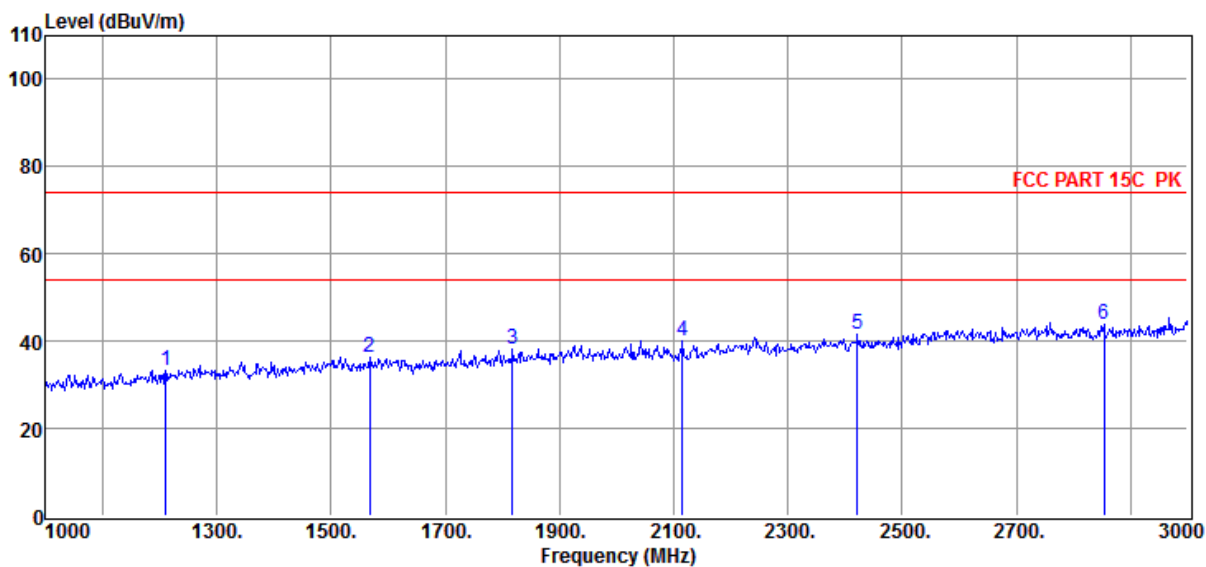

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1210.00	-5.20	33.22	74.00	-40.78	150	216	Peak	HORIZONTAL
2	1568.00	-2.40	36.32	74.00	-37.68	170	106	Peak	HORIZONTAL
3	1818.00	-0.84	38.04	74.00	-35.96	166	185	Peak	HORIZONTAL
4	2116.00	0.70	40.08	74.00	-33.92	181	155	Peak	HORIZONTAL
5	2422.00	3.31	41.59	74.00	-32.41	167	219	Peak	HORIZONTAL
6	2854.00	6.73	43.94	74.00	-30.06	161	10	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 5550MHz

Data: 436

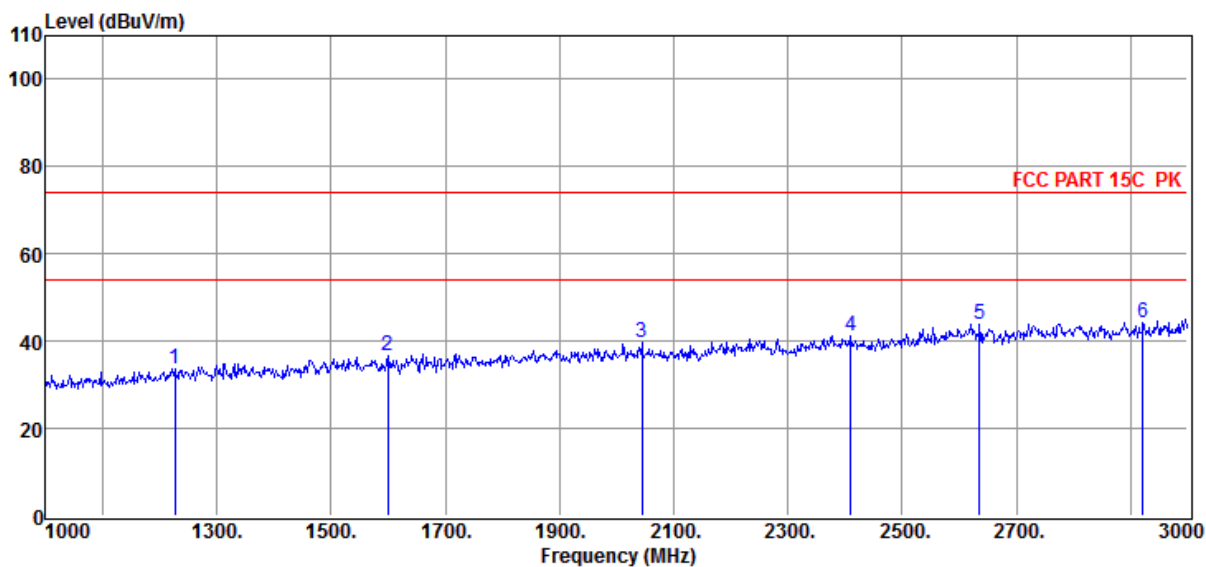

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1226.00	-5.01	33.78	74.00	-40.22	186	117	Peak	HORIZONTAL
2	1600.00	-2.28	36.51	74.00	-37.49	187	44	Peak	HORIZONTAL
3	2044.00	1.05	39.57	74.00	-34.43	181	27	Peak	HORIZONTAL
4	2410.00	3.32	41.24	74.00	-32.76	154	65	Peak	HORIZONTAL
5	2636.00	5.47	43.92	74.00	-30.08	174	86	Peak	HORIZONTAL
6	2922.00	6.83	44.19	74.00	-29.81	152	138	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 5550MHz

Data: 437

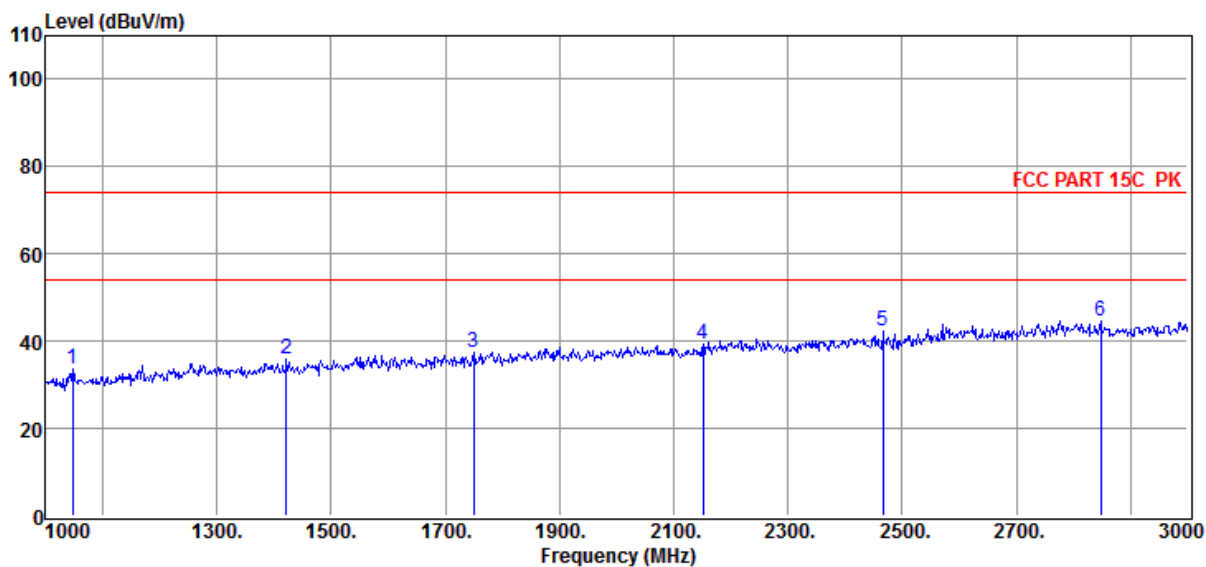

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1048.00	-6.94	33.63	74.00	-40.37	178	308	Peak	VERTICAL
2	1422.00	-3.83	35.82	74.00	-38.18	179	131	Peak	VERTICAL
3	1750.00	-1.44	37.37	74.00	-36.63	180	162	Peak	VERTICAL
4	2152.00	1.19	39.22	74.00	-34.78	185	0	Peak	VERTICAL
5	2466.00	3.41	42.43	74.00	-31.57	186	217	Peak	VERTICAL
6	2848.00	6.69	44.50	74.00	-29.50	161	61	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 5670MHz

Data: 438

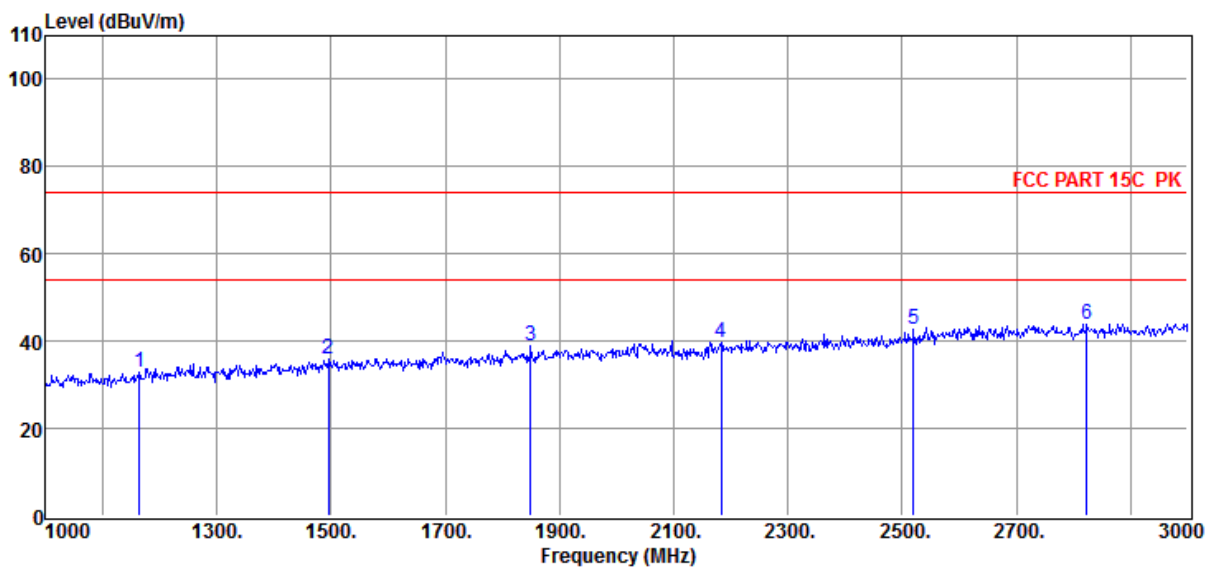

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1164.00	-6.04	32.91	74.00	-41.09	188	186	Peak	VERTICAL
2	1496.00	-2.99	35.84	74.00	-38.16	170	254	Peak	VERTICAL
3	1850.00	-0.33	38.79	74.00	-35.21	180	146	Peak	VERTICAL
4	2184.00	1.98	39.70	74.00	-34.30	181	54	Peak	VERTICAL
5	2520.00	4.10	42.67	74.00	-31.33	189	17	Peak	VERTICAL
6	2824.00	6.54	43.87	74.00	-30.13	168	215	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 5670MHz

Data: 439

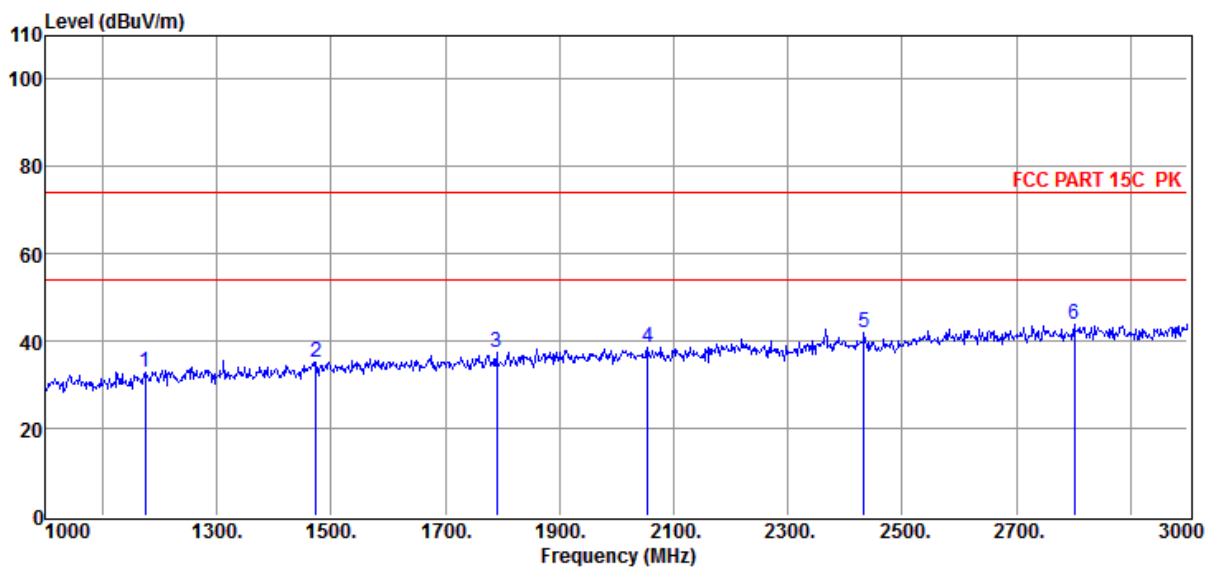

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1174.00	-5.84	33.06	74.00	-40.94	173	107	Peak	HORIZONTAL
2	1474.00	-3.23	35.24	74.00	-38.76	182	11	Peak	HORIZONTAL
3	1790.00	-1.19	37.59	74.00	-36.41	182	340	Peak	HORIZONTAL
4	2054.00	1.10	38.53	74.00	-35.47	172	26	Peak	HORIZONTAL
5	2434.00	3.30	41.88	74.00	-32.12	150	114	Peak	HORIZONTAL
6	2802.00	6.40	43.85	74.00	-30.15	187	267	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 5755MHz

Data: 440

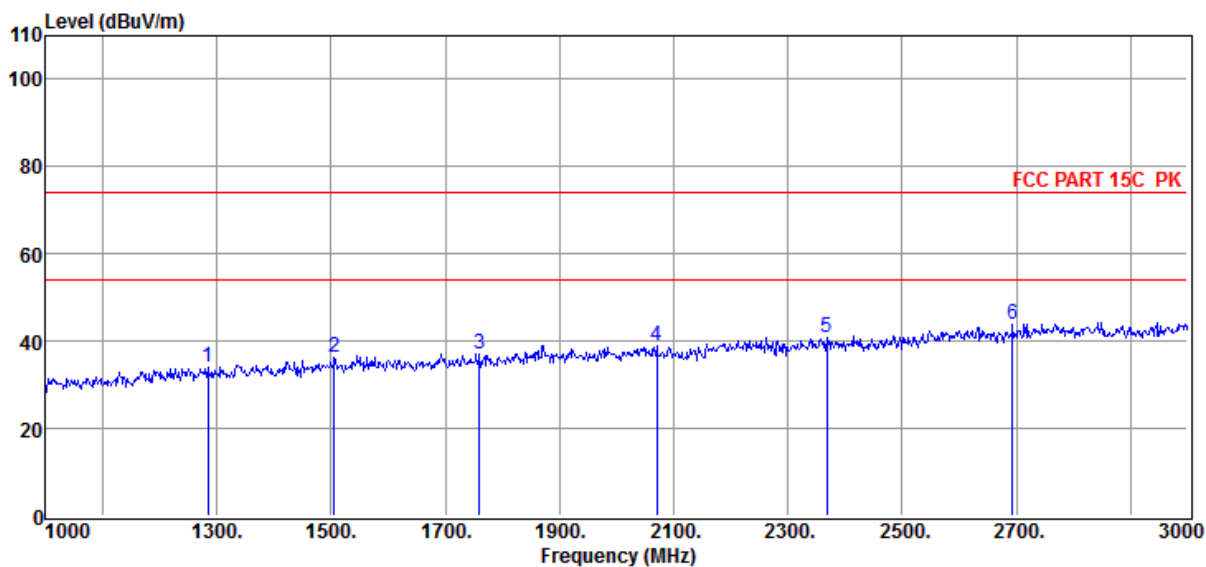

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1284.00	-4.70	34.10	74.00	-39.90	156	5	Peak	HORIZONTAL
2	1506.00	-2.89	36.17	74.00	-37.83	170	135	Peak	HORIZONTAL
3	1760.00	-1.38	37.15	74.00	-36.85	159	31	Peak	HORIZONTAL
4	2070.00	0.89	38.86	74.00	-35.14	181	294	Peak	HORIZONTAL
5	2368.00	3.24	40.73	74.00	-33.27	166	43	Peak	HORIZONTAL
6	2694.00	5.84	43.97	74.00	-30.03	185	256	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 5755MHz

Data: 441

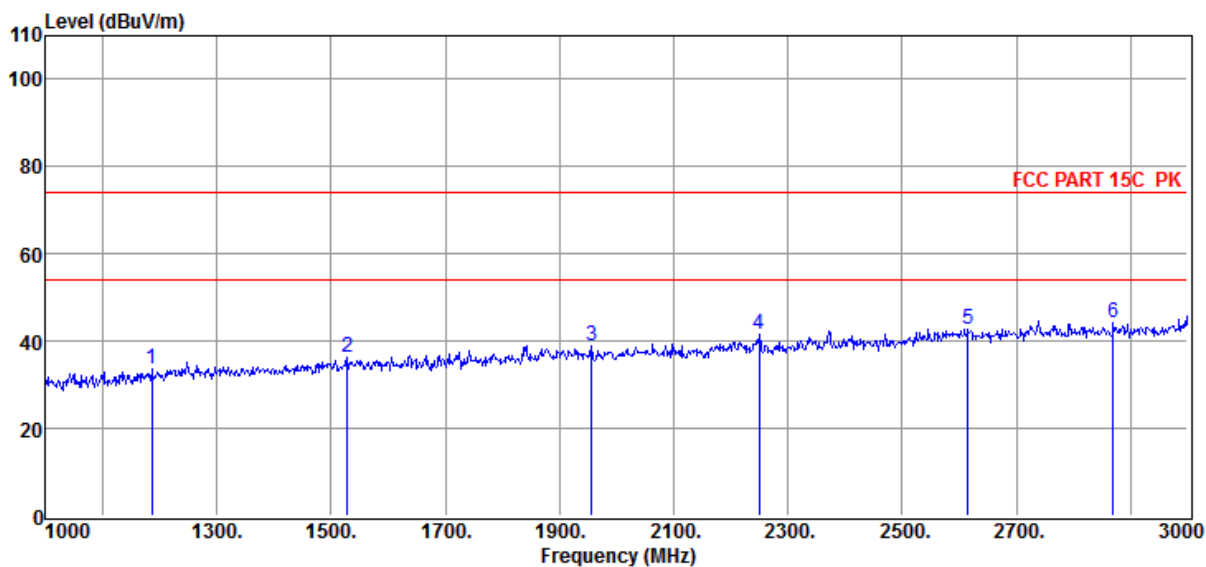

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1186.00	-5.60	33.79	74.00	-40.21	166	322	Peak	VERTICAL
2	1528.00	-2.67	36.29	74.00	-37.71	172	119	Peak	VERTICAL
3	1956.00	0.29	38.81	74.00	-35.19	188	150	Peak	VERTICAL
4	2250.00	2.37	41.52	74.00	-32.48	151	348	Peak	VERTICAL
5	2616.00	5.71	42.87	74.00	-31.13	166	40	Peak	VERTICAL
6	2870.00	6.82	44.06	74.00	-29.94	187	210	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 5795MHz

Data: 442

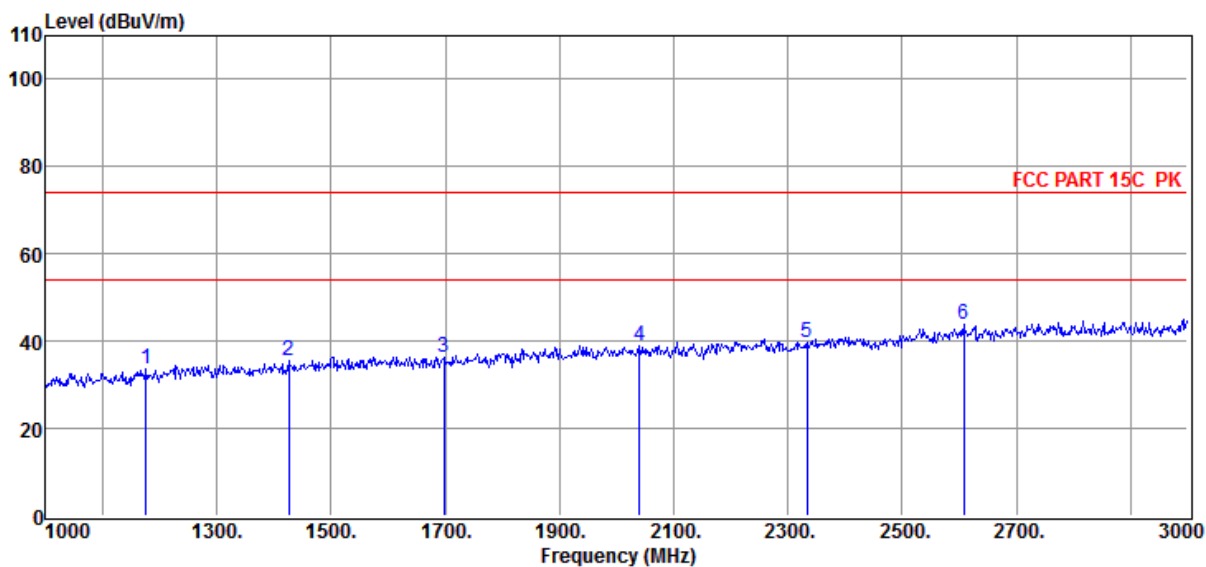

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1176.00	-5.80	33.51	74.00	-40.49	152	114	Peak	VERTICAL
2	1426.00	-3.78	35.35	74.00	-38.65	162	333	Peak	VERTICAL
3	1698.00	-2.00	36.42	74.00	-37.58	179	249	Peak	VERTICAL
4	2040.00	0.97	38.78	74.00	-35.22	175	39	Peak	VERTICAL
5	2334.00	2.78	39.82	74.00	-34.18	150	23	Peak	VERTICAL
6	2608.00	5.82	43.71	74.00	-30.29	190	269	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 5795MHz

Data: 443

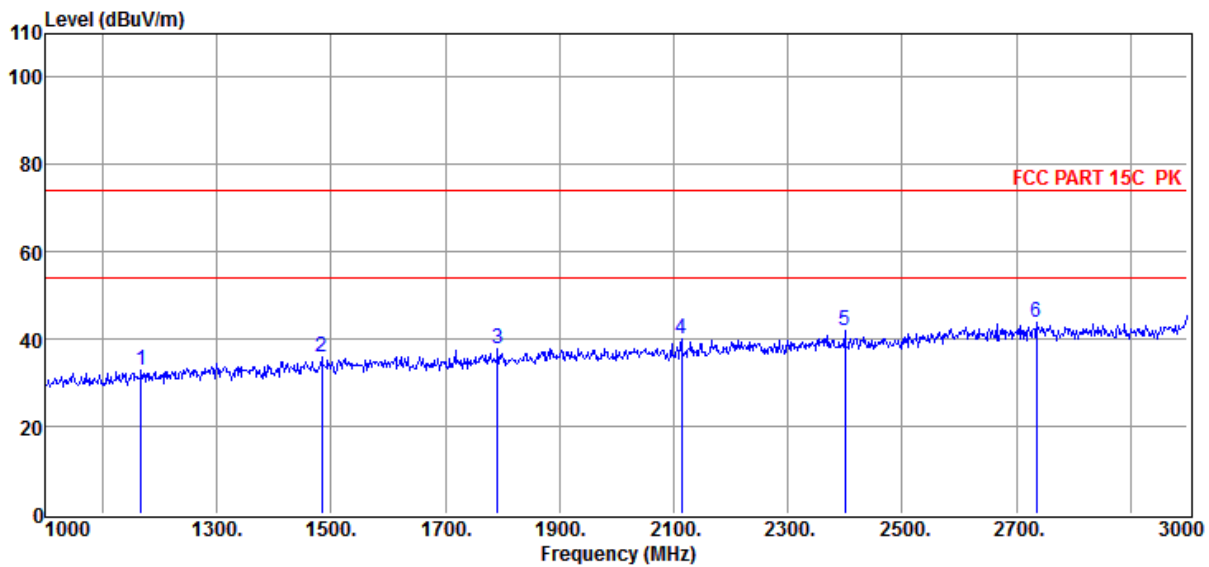

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1168.00	-5.96	32.88	74.00	-41.12	180	355	Peak	HORIZONTAL
2	1484.00	-3.12	35.82	74.00	-38.18	184	27	Peak	HORIZONTAL
3	1792.00	-1.18	37.73	74.00	-36.27	165	296	Peak	HORIZONTAL
4	2114.00	0.67	40.02	74.00	-33.98	184	56	Peak	HORIZONTAL
5	2400.00	3.33	41.90	74.00	-32.10	156	93	Peak	HORIZONTAL
6	2736.00	6.44	43.76	74.00	-30.24	172	114	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5180MHZ

Data: 444

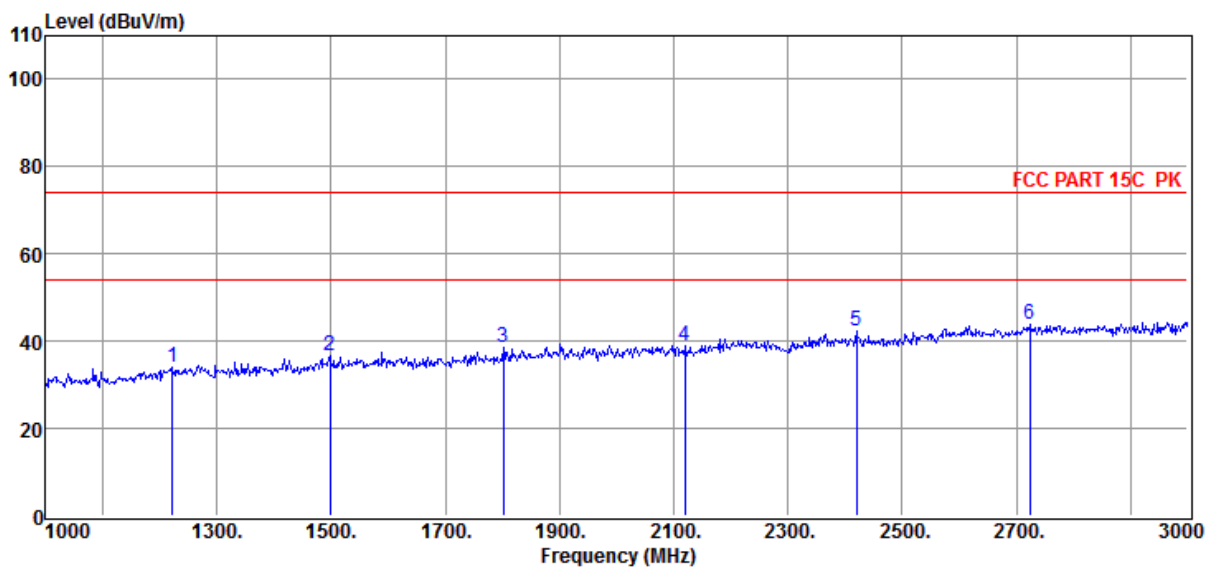

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1222.00	-5.05	34.11	74.00	-39.89	181	151	Peak	HORIZONTAL
2	1498.00	-2.97	36.61	74.00	-37.39	154	162	Peak	HORIZONTAL
3	1802.00	-1.10	38.41	74.00	-35.59	161	194	Peak	HORIZONTAL
4	2120.00	0.75	38.90	74.00	-35.10	174	255	Peak	HORIZONTAL
5	2420.00	3.31	42.28	74.00	-31.72	178	302	Peak	HORIZONTAL
6	2724.00	6.27	43.92	74.00	-30.08	172	75	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5180MHz

Data: 445

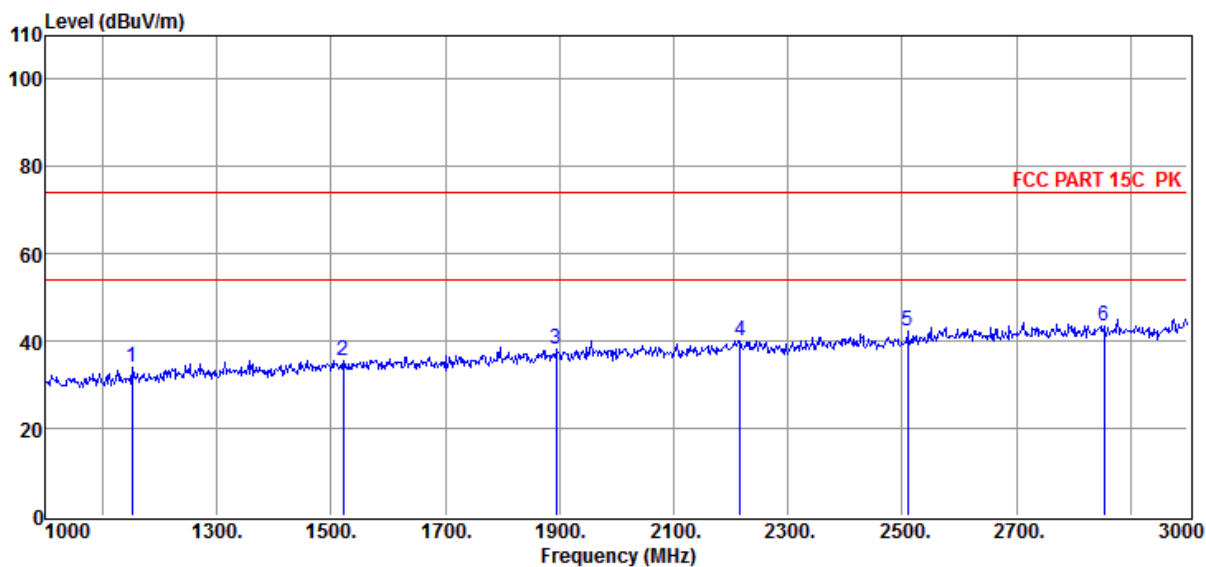

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1152.00	-6.28	33.90	74.00	-40.10	152	226	Peak	VERTICAL
2	1522.00	-2.74	35.50	74.00	-38.50	171	76	Peak	VERTICAL
3	1894.00	-0.10	38.24	74.00	-35.76	172	149	Peak	VERTICAL
4	2216.00	2.37	40.14	74.00	-33.86	167	71	Peak	VERTICAL
5	2510.00	3.87	42.30	74.00	-31.70	179	35	Peak	VERTICAL
6	2854.00	6.73	43.61	74.00	-30.39	157	289	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5200MHZ

Data: 446

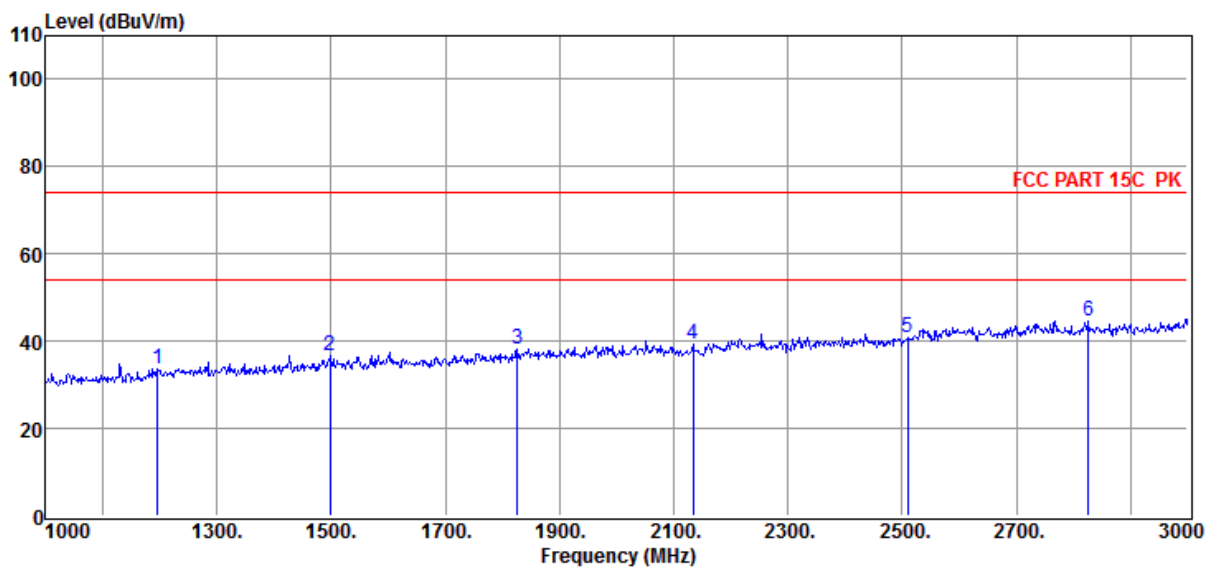

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1196.00	-5.40	33.55	74.00	-40.45	155	162	Peak	VERTICAL
2	1498.00	-2.97	36.53	74.00	-37.47	182	173	Peak	VERTICAL
3	1826.00	-0.71	38.21	74.00	-35.79	159	286	Peak	VERTICAL
4	2134.00	0.94	39.21	74.00	-34.79	179	67	Peak	VERTICAL
5	2510.00	3.87	40.79	74.00	-33.21	170	350	Peak	VERTICAL
6	2826.00	6.55	44.59	74.00	-29.41	173	279	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5200MHZ

Data: 447

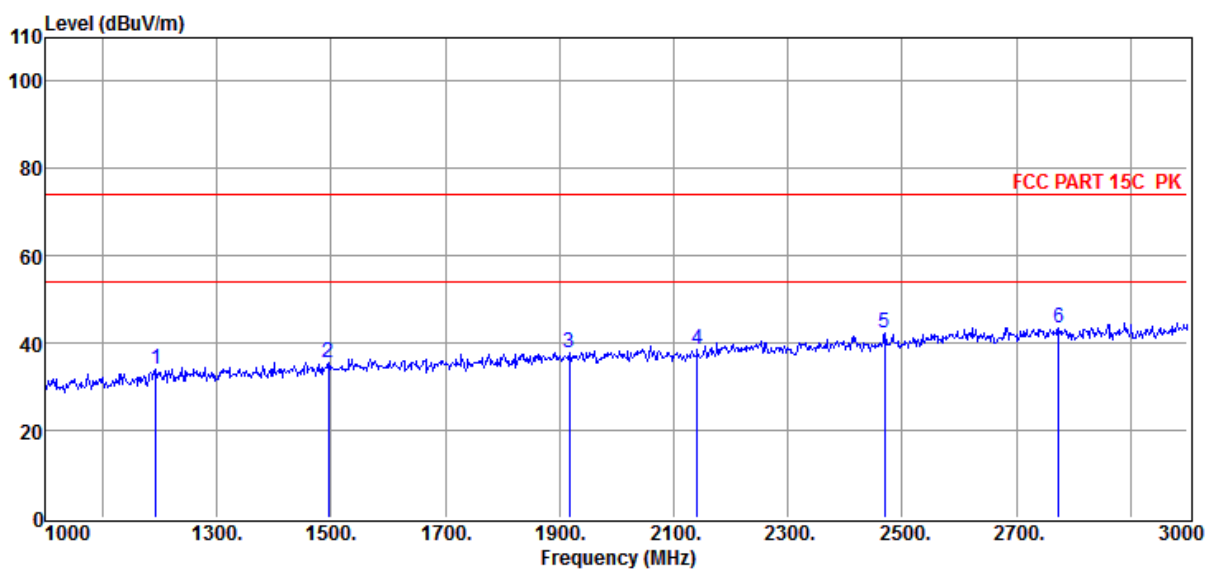

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1194.00	-5.44	34.04	74.00	-39.96	169	255	Peak	HORIZONTAL
2	1496.00	-2.99	35.69	74.00	-38.31	174	213	Peak	HORIZONTAL
3	1918.00	0.07	37.82	74.00	-36.18	180	217	Peak	HORIZONTAL
4	2142.00	1.05	38.52	74.00	-35.48	170	338	Peak	HORIZONTAL
5	2470.00	3.43	42.23	74.00	-31.77	184	46	Peak	HORIZONTAL
6	2774.00	6.52	43.37	74.00	-30.63	151	301	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5240MHZ

Data: 448

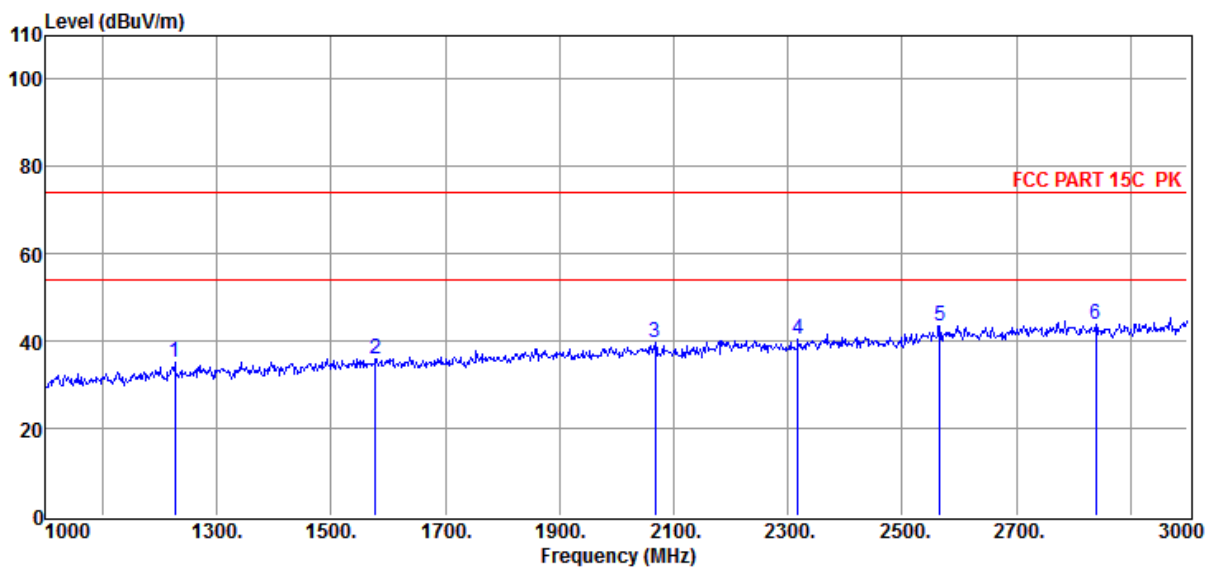

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1226.00	-5.01	35.17	74.00	-38.83	154	60	Peak	HORIZONTAL
2	1578.00	-2.36	36.07	74.00	-37.93	166	162	Peak	HORIZONTAL
3	2068.00	0.91	39.64	74.00	-34.36	178	157	Peak	HORIZONTAL
4	2318.00	2.36	40.61	74.00	-33.39	185	360	Peak	HORIZONTAL
5	2566.00	5.15	43.63	74.00	-30.37	185	243	Peak	HORIZONTAL
6	2840.00	6.64	43.79	74.00	-30.21	159	276	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5240MHz

Data: 449

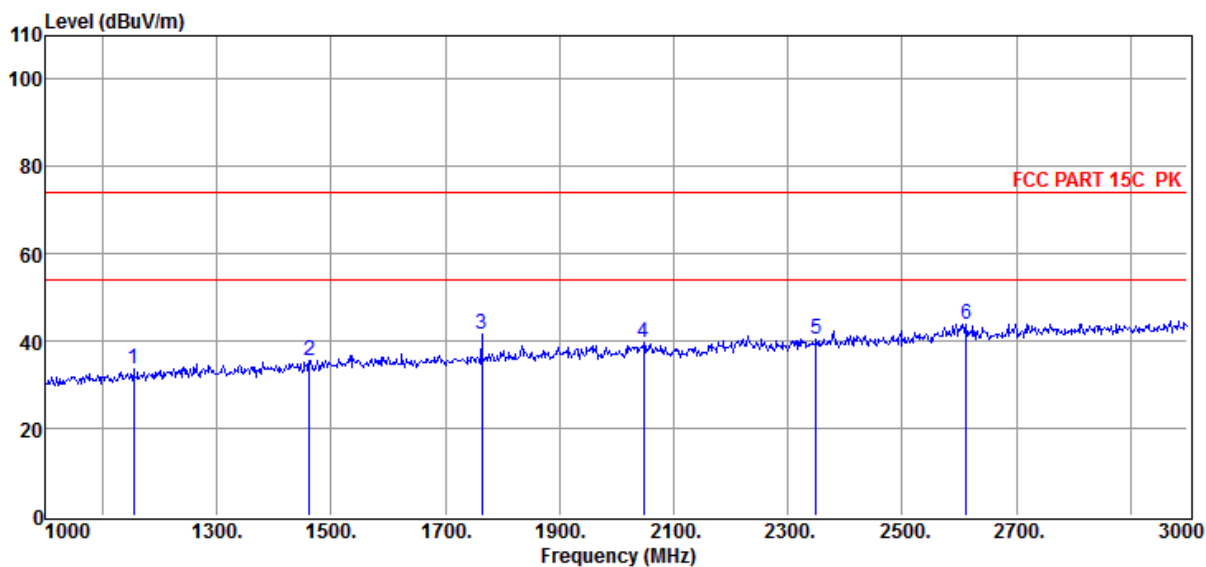

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1154.00	-6.24	33.64	74.00	-40.36	177	344	Peak	VERTICAL
2	1462.00	-3.35	35.48	74.00	-38.52	173	237	Peak	VERTICAL
3	1764.00	-1.36	41.48	74.00	-32.52	159	302	Peak	VERTICAL
4	2048.00	1.12	39.82	74.00	-34.18	190	286	Peak	VERTICAL
5	2350.00	3.19	40.58	74.00	-33.42	187	8	Peak	VERTICAL
6	2612.00	5.76	43.84	74.00	-30.16	184	139	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5260MHZ

Data: 450

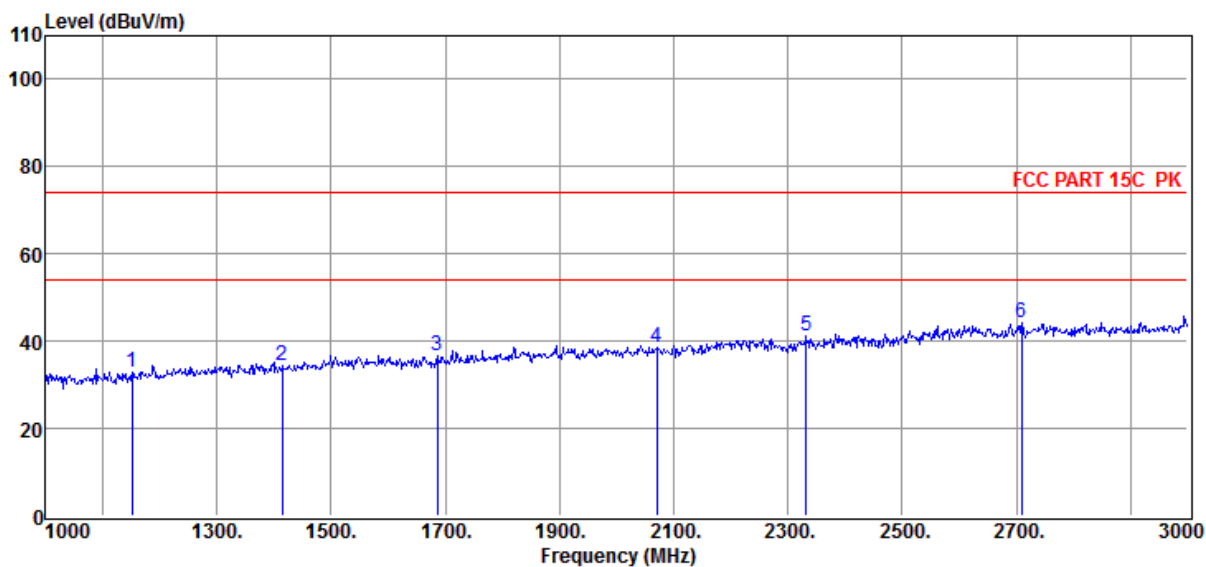

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1152.00	-6.28	32.71	74.00	-41.29	163	74	Peak	VERTICAL
2	1414.00	-3.93	34.57	74.00	-39.43	168	7	Peak	VERTICAL
3	1686.00	-2.08	36.56	74.00	-37.44	172	244	Peak	VERTICAL
4	2070.00	0.89	38.45	74.00	-35.55	179	125	Peak	VERTICAL
5	2332.00	2.73	41.37	74.00	-32.63	156	129	Peak	VERTICAL
6	2710.00	6.06	44.40	74.00	-29.60	172	269	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5260MHz

Data: 451

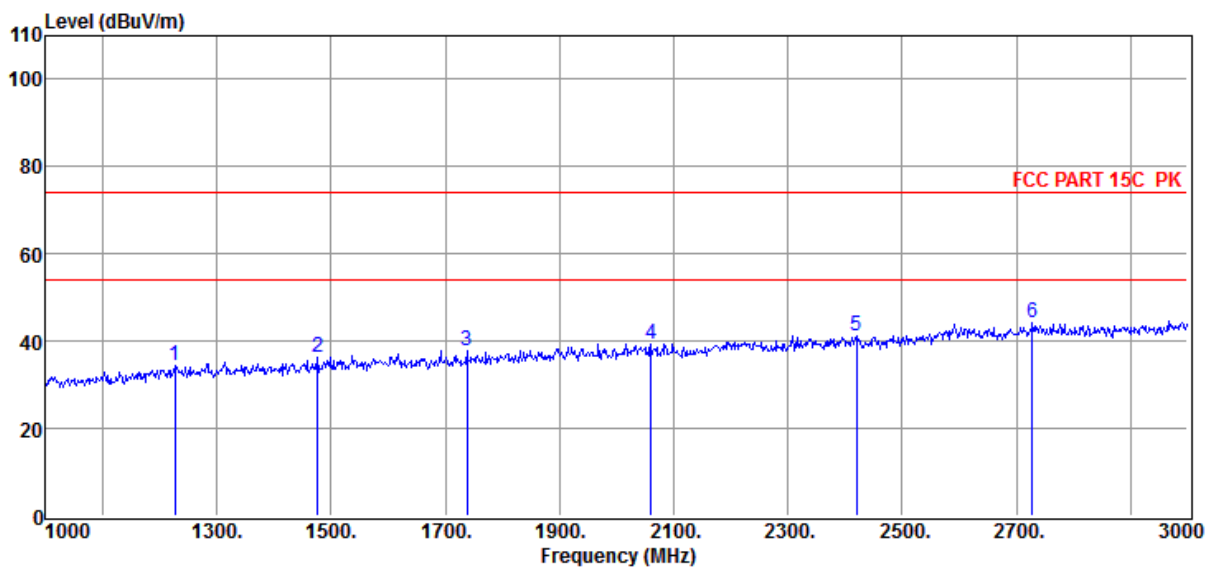

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1226.00	-5.01	34.50	74.00	-39.50	166	136	Peak	HORIZONTAL
2	1476.00	-3.20	36.27	74.00	-37.73	190	98	Peak	HORIZONTAL
3	1738.00	-1.57	37.72	74.00	-36.28	176	324	Peak	HORIZONTAL
4	2060.00	1.03	39.37	74.00	-34.63	177	236	Peak	HORIZONTAL
5	2420.00	3.31	41.31	74.00	-32.69	174	107	Peak	HORIZONTAL
6	2728.00	6.33	44.14	74.00	-29.86	152	268	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5280MHz

Data: 452

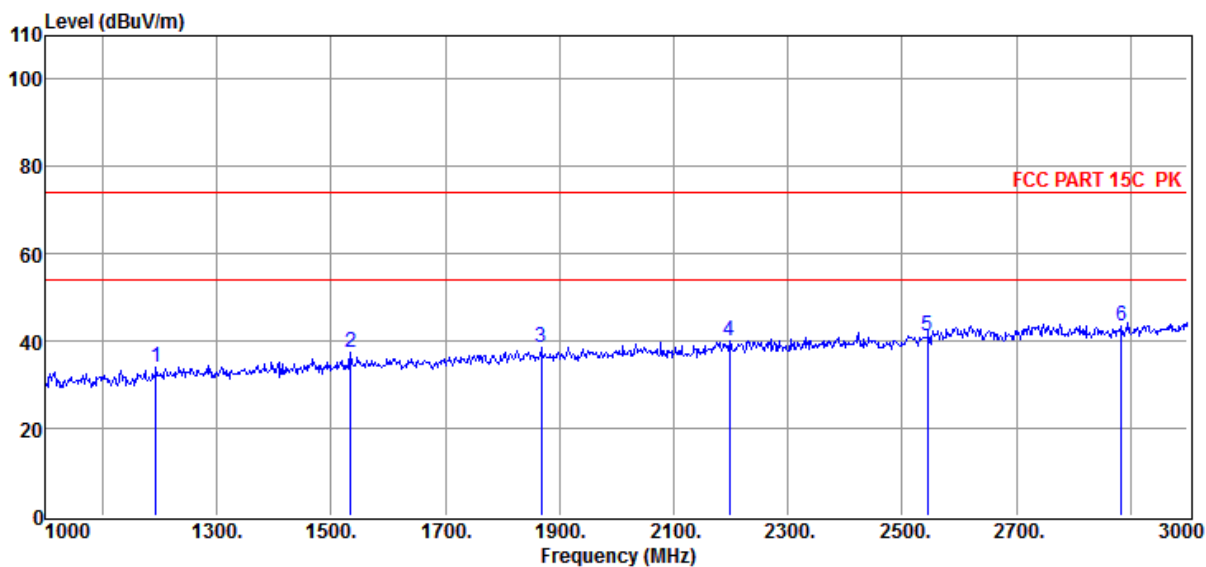

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1194.00	-5.44	33.91	74.00	-40.09	165	94	Peak	HORIZONTAL
2	1534.00	-2.62	37.31	74.00	-36.69	169	92	Peak	HORIZONTAL
3	1868.00	-0.24	38.62	74.00	-35.38	155	93	Peak	HORIZONTAL
4	2198.00	2.33	40.20	74.00	-33.80	177	92	Peak	HORIZONTAL
5	2544.00	4.65	41.24	74.00	-32.76	152	288	Peak	HORIZONTAL
6	2884.00	6.90	43.56	74.00	-30.44	185	148	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5280MHz

Data: 453

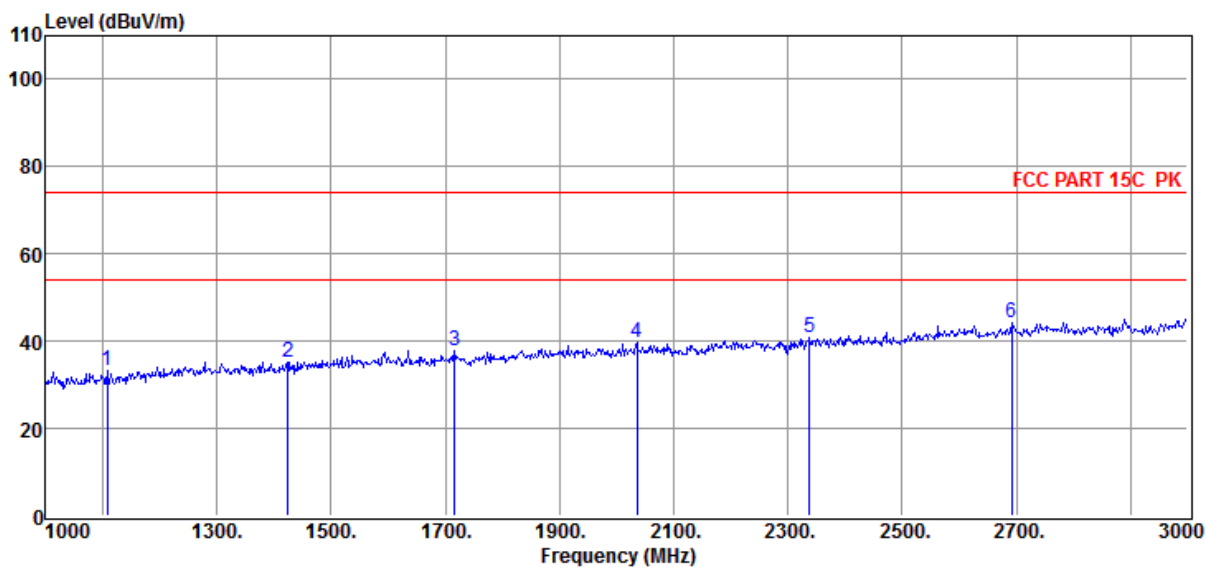

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1108.00	-6.68	33.09	74.00	-40.91	153	43	Peak	VERTICAL
2	1424.00	-3.80	35.24	74.00	-38.76	164	253	Peak	VERTICAL
3	1716.00	-1.80	37.64	74.00	-36.36	186	7	Peak	VERTICAL
4	2036.00	0.90	39.65	74.00	-34.35	157	105	Peak	VERTICAL
5	2338.00	2.88	40.64	74.00	-33.36	179	1	Peak	VERTICAL
6	2692.00	5.81	44.06	74.00	-29.94	166	56	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5320MHz

Data: 454

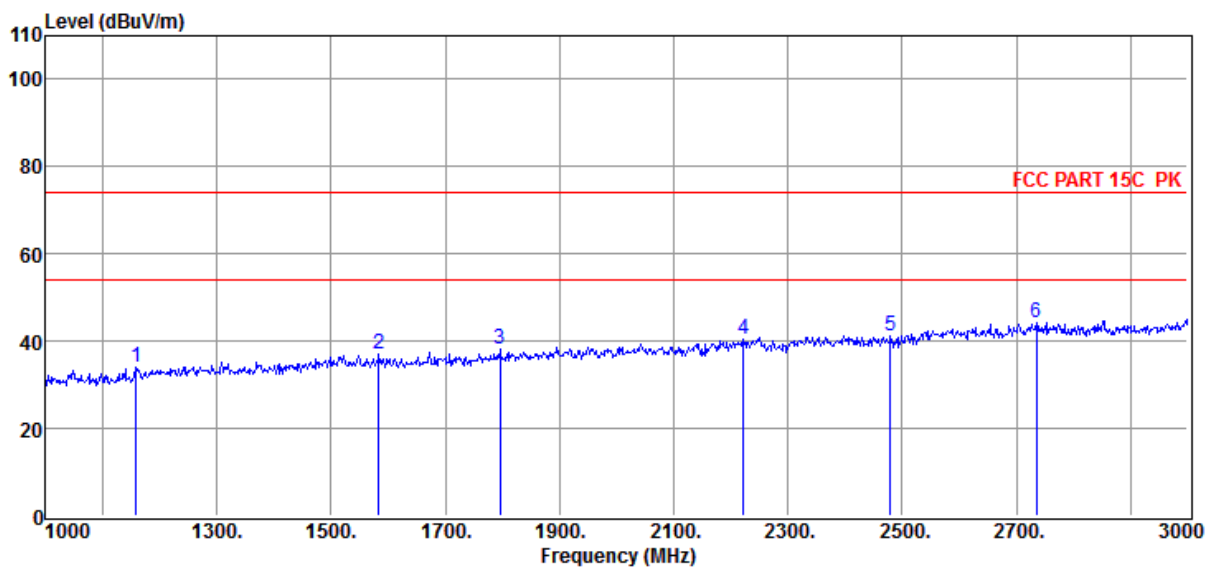

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1158.00	-6.16	34.11	74.00	-39.89	150	99	Peak	VERTICAL
2	1584.00	-2.33	36.98	74.00	-37.02	175	185	Peak	VERTICAL
3	1796.00	-1.15	38.27	74.00	-35.73	152	177	Peak	VERTICAL
4	2222.00	2.37	40.37	74.00	-33.63	159	191	Peak	VERTICAL
5	2480.00	3.50	41.20	74.00	-32.80	154	65	Peak	VERTICAL
6	2736.00	6.44	44.22	74.00	-29.78	189	231	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5320MHZ

Data: 455

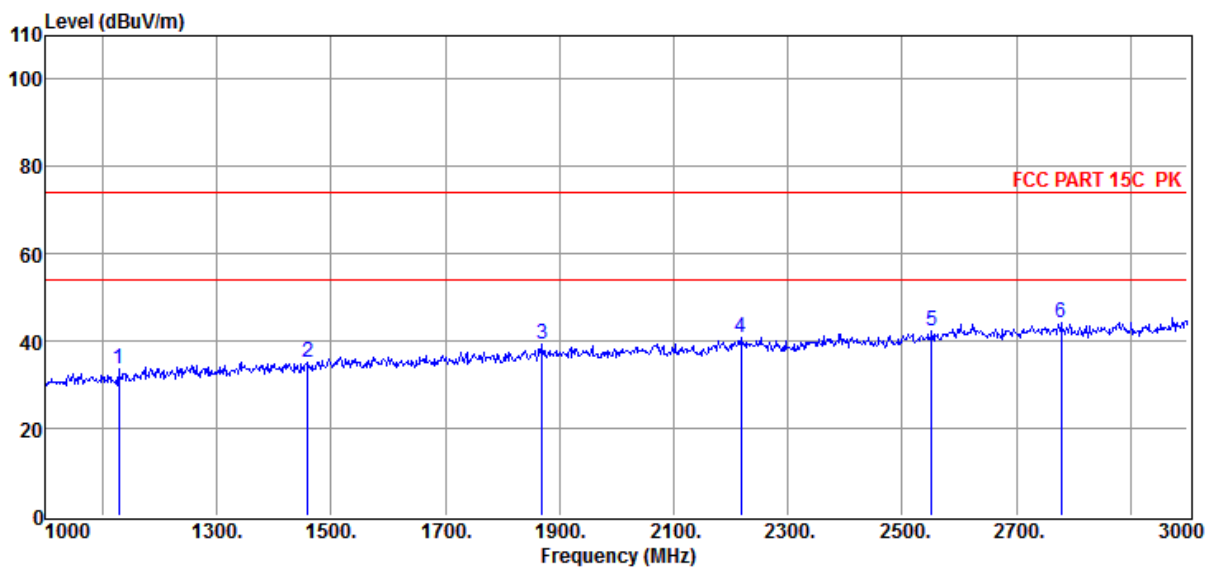

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1128.00	-6.51	33.61	74.00	-40.39	180	313	Peak	HORIZONTAL
2	1460.00	-3.37	35.31	74.00	-38.69	180	22	Peak	HORIZONTAL
3	1870.00	-0.23	39.26	74.00	-34.74	168	97	Peak	HORIZONTAL
4	2218.00	2.37	40.81	74.00	-33.19	166	141	Peak	HORIZONTAL
5	2552.00	4.83	42.19	74.00	-31.81	163	272	Peak	HORIZONTAL
6	2778.00	6.49	44.29	74.00	-29.71	177	236	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5500MHZ

Data: 456

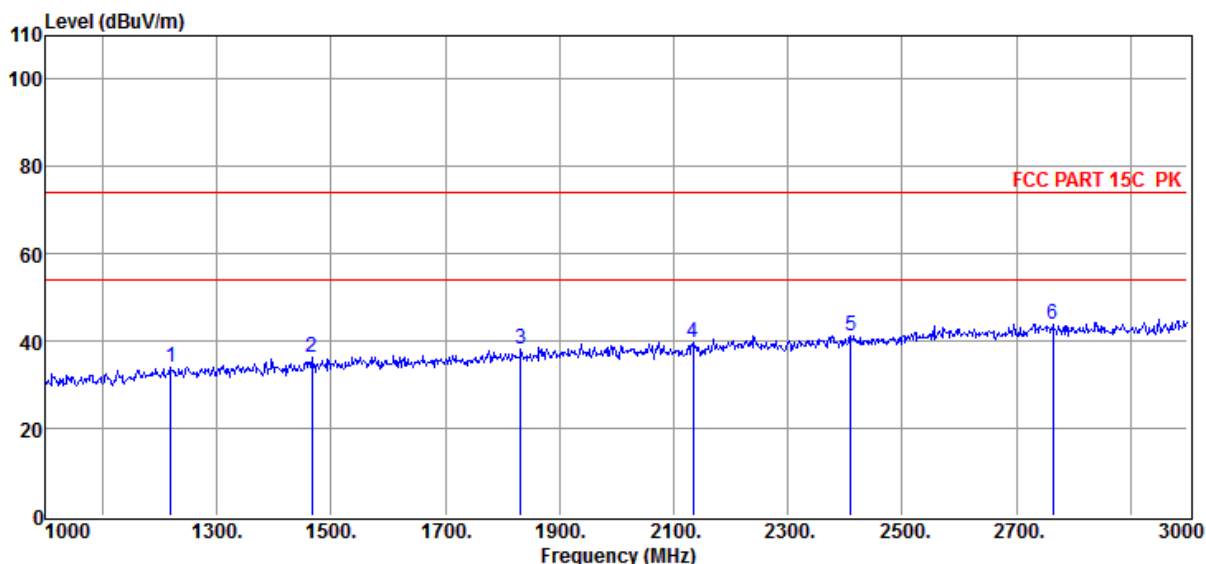

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1220.00	-5.08	33.95	74.00	-40.05	160	14	Peak	HORIZONTAL
2	1466.00	-3.31	36.26	74.00	-37.74	159	40	Peak	HORIZONTAL
3	1832.00	-0.62	38.14	74.00	-35.86	181	279	Peak	HORIZONTAL
4	2134.00	0.94	39.88	74.00	-34.12	169	299	Peak	HORIZONTAL
5	2410.00	3.32	41.24	74.00	-32.76	180	136	Peak	HORIZONTAL
6	2764.00	6.57	43.83	74.00	-30.17	169	110	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5500MHZ

Data: 457

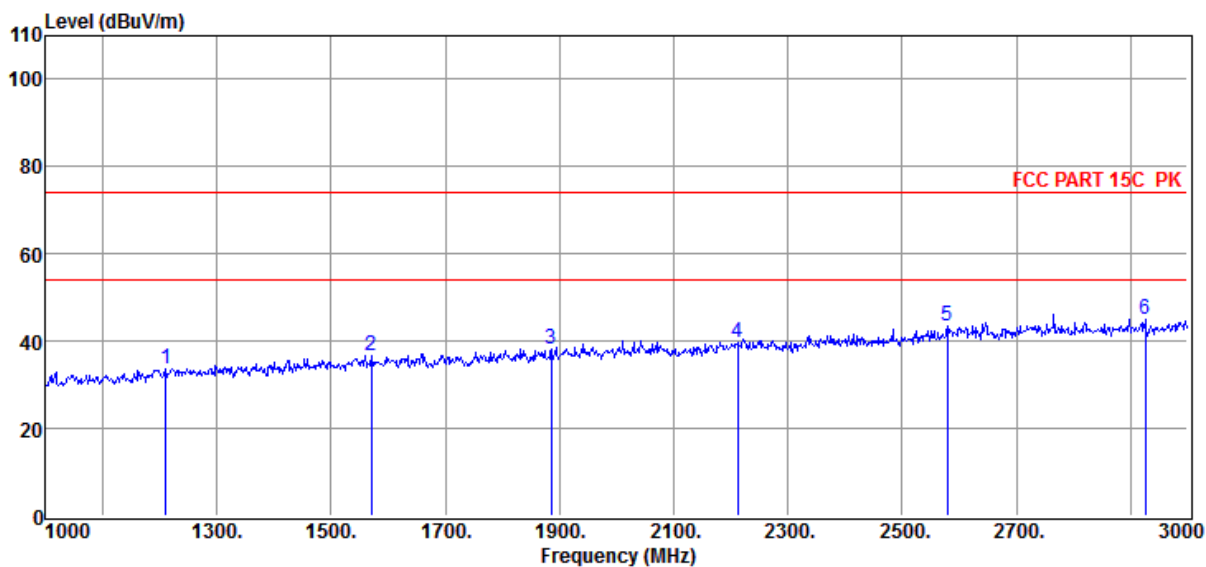

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1210.00	-5.20	33.66	74.00	-40.34	160	292	Peak	VERTICAL
2	1570.00	-2.39	36.62	74.00	-37.38	150	102	Peak	VERTICAL
3	1886.00	-0.14	38.37	74.00	-35.63	186	240	Peak	VERTICAL
4	2212.00	2.37	39.82	74.00	-34.18	176	236	Peak	VERTICAL
5	2580.00	5.46	43.49	74.00	-30.51	188	252	Peak	VERTICAL
6	2926.00	6.79	44.99	74.00	-29.01	158	325	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5580MHz

Data: 458

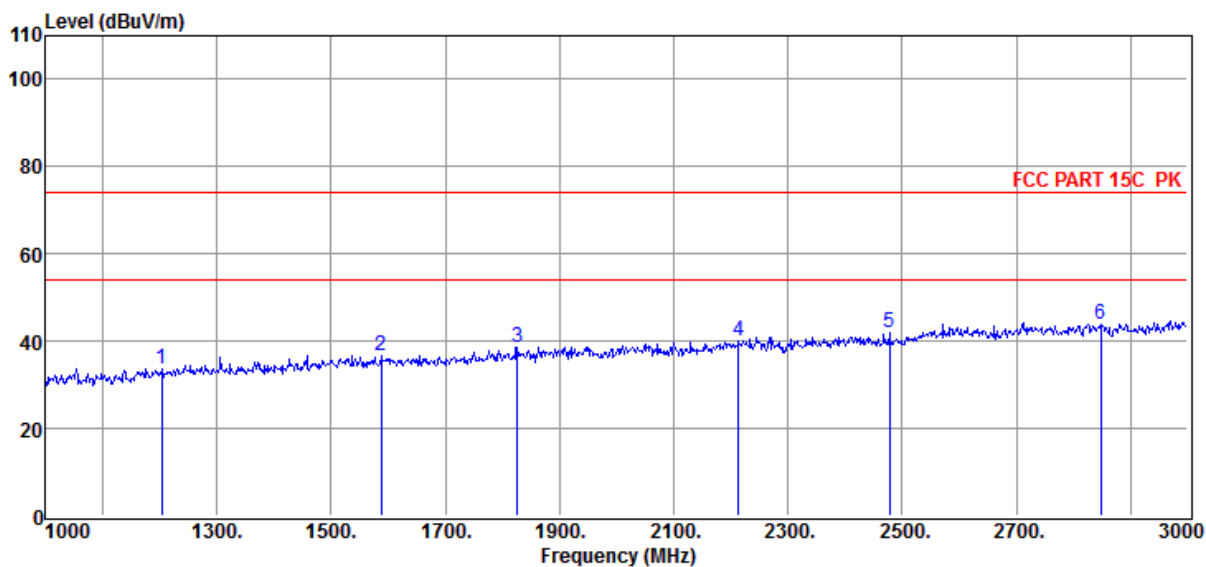

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1204.00	-5.27	33.50	74.00	-40.50	160	297	Peak	VERTICAL
2	1588.00	-2.33	36.65	74.00	-37.35	181	265	Peak	VERTICAL
3	1826.00	-0.71	38.56	74.00	-35.44	177	114	Peak	VERTICAL
4	2214.00	2.37	40.06	74.00	-33.94	169	72	Peak	VERTICAL
5	2478.00	3.49	41.78	74.00	-32.22	159	201	Peak	VERTICAL
6	2848.00	6.69	43.98	74.00	-30.02	160	273	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5580MHz

Data: 459

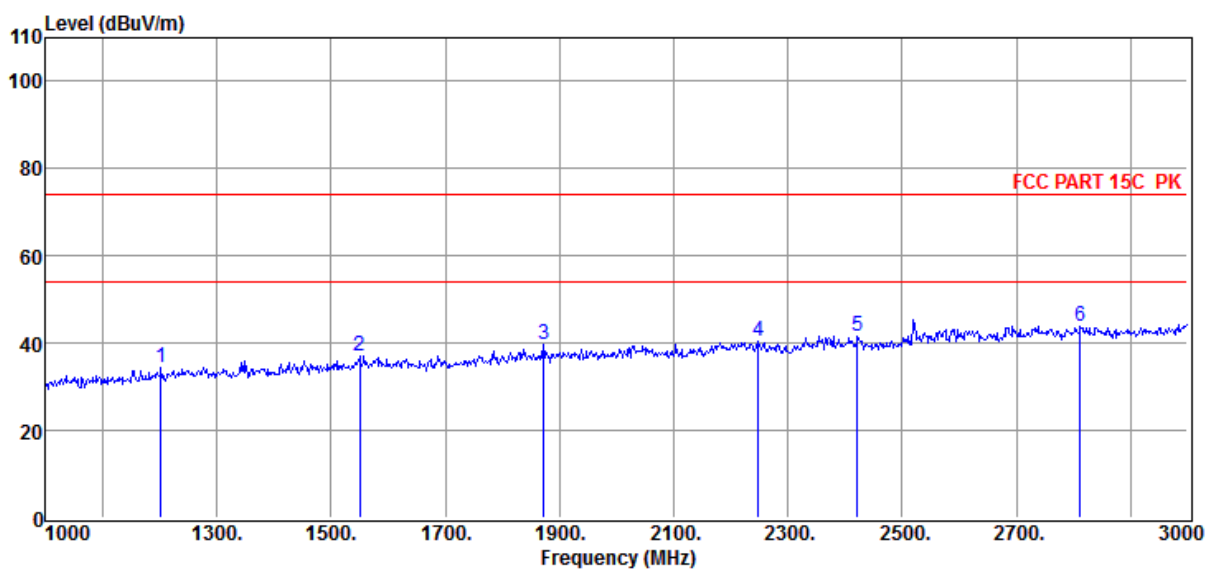

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1202.00	-5.29	34.34	74.00	-39.66	165	291	Peak	HORIZONTAL
2	1550.00	-2.46	37.00	74.00	-37.00	162	260	Peak	HORIZONTAL
3	1872.00	-0.21	39.66	74.00	-34.34	188	345	Peak	HORIZONTAL
4	2248.00	2.37	40.41	74.00	-33.59	187	96	Peak	HORIZONTAL
5	2422.00	3.31	41.62	74.00	-32.38	161	119	Peak	HORIZONTAL
6	2812.00	6.46	43.96	74.00	-30.04	169	299	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5700MHZ

Data: 460

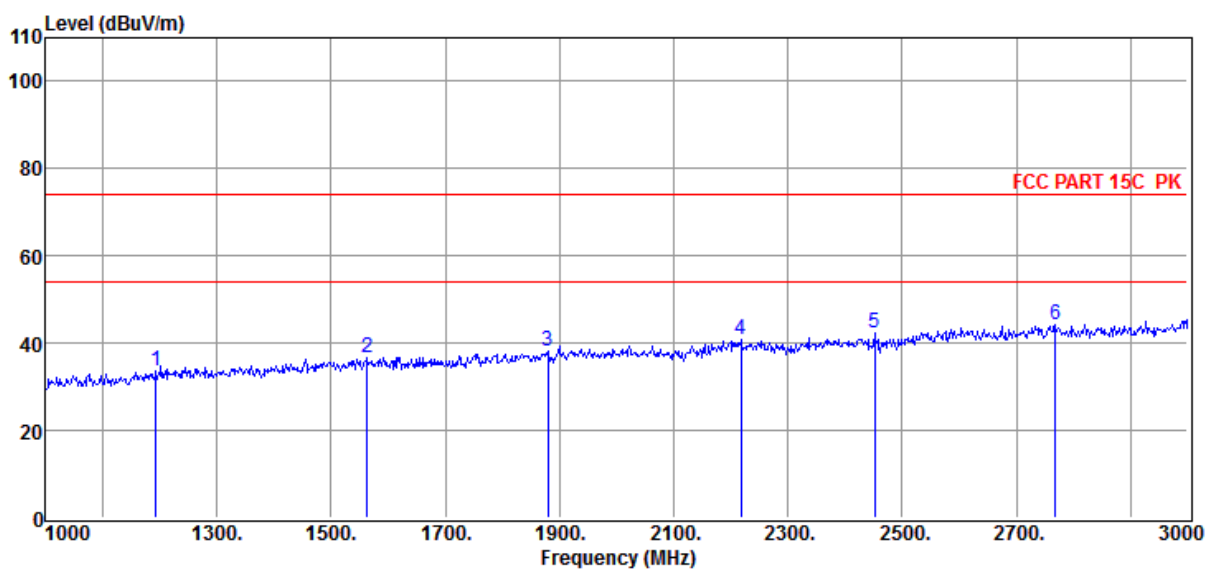

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1194.00	-5.44	33.62	74.00	-40.38	169	78	Peak	HORIZONTAL
2	1564.00	-2.41	36.51	74.00	-37.49	158	225	Peak	HORIZONTAL
3	1880.00	-0.17	38.27	74.00	-35.73	162	358	Peak	HORIZONTAL
4	2218.00	2.37	40.92	74.00	-33.08	182	22	Peak	HORIZONTAL
5	2452.00	3.30	42.22	74.00	-31.78	162	177	Peak	HORIZONTAL
6	2768.00	6.55	44.27	74.00	-29.73	187	238	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5700MHz

Data: 461

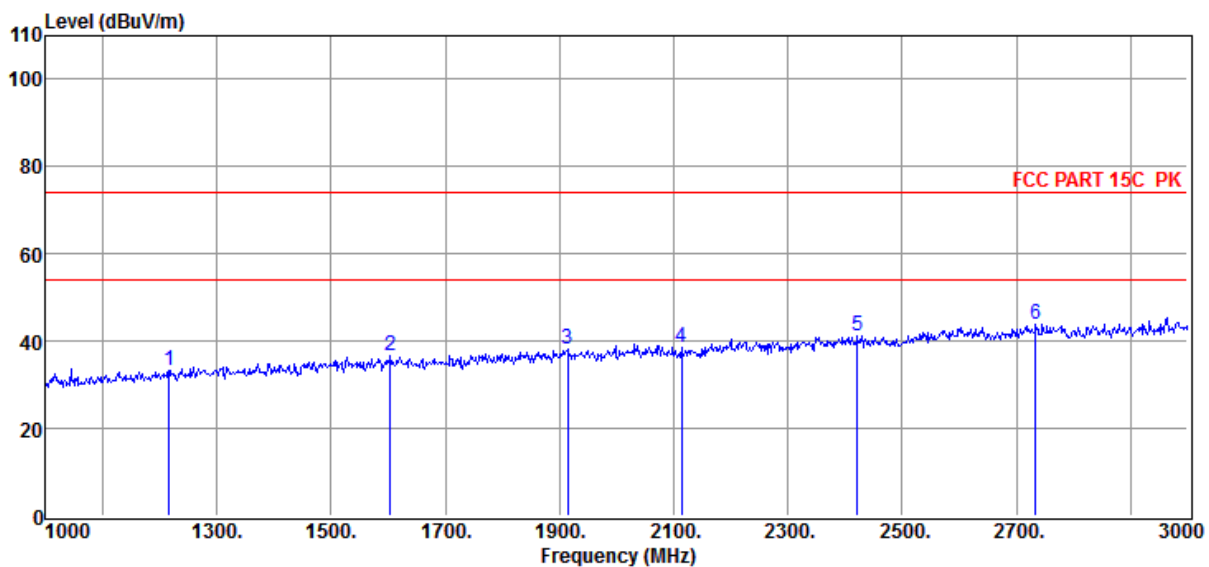

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1216.00	-5.13	33.33	74.00	-40.67	156	90	Peak	VERTICAL
2	1604.00	-2.28	36.56	74.00	-37.44	187	347	Peak	VERTICAL
3	1914.00	0.04	38.17	74.00	-35.83	163	2	Peak	VERTICAL
4	2114.00	0.67	38.61	74.00	-35.39	163	359	Peak	VERTICAL
5	2422.00	3.31	41.09	74.00	-32.91	164	346	Peak	VERTICAL
6	2734.00	6.42	44.01	74.00	-29.99	189	34	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5745MHZ

Data: 462

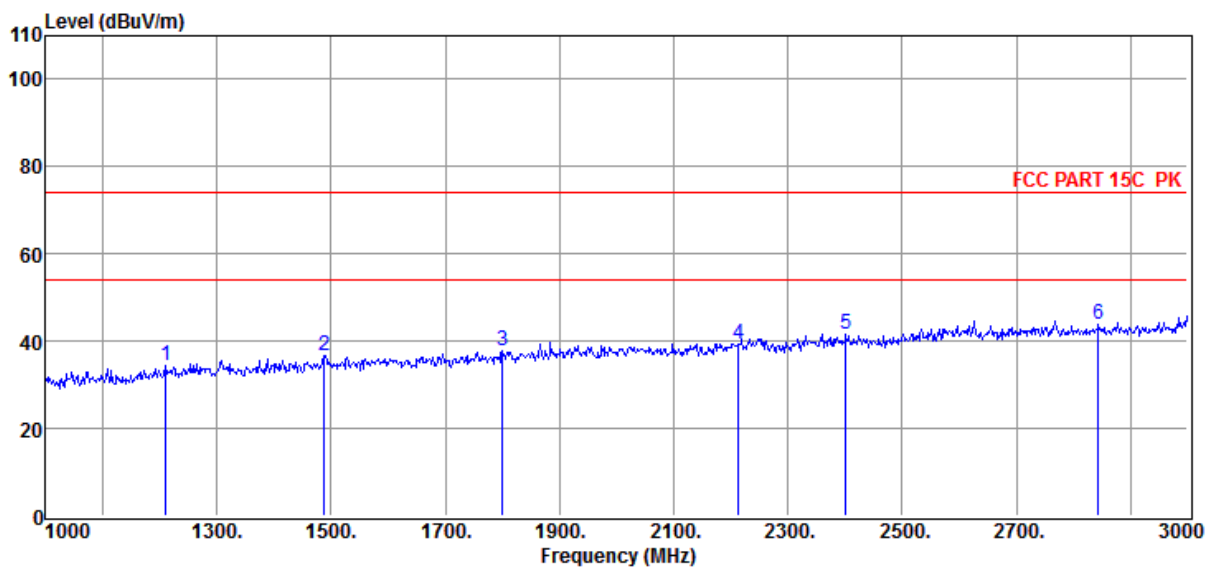

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1210.00	-5.20	34.25	74.00	-39.75	166	37	Peak	VERTICAL
2	1488.00	-3.08	36.80	74.00	-37.20	186	67	Peak	VERTICAL
3	1800.00	-1.13	37.98	74.00	-36.02	158	341	Peak	VERTICAL
4	2214.00	2.37	39.42	74.00	-34.58	174	51	Peak	VERTICAL
5	2402.00	3.33	41.53	74.00	-32.47	162	60	Peak	VERTICAL
6	2844.00	6.67	43.76	74.00	-30.24	181	237	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5745MHZ

Data: 463

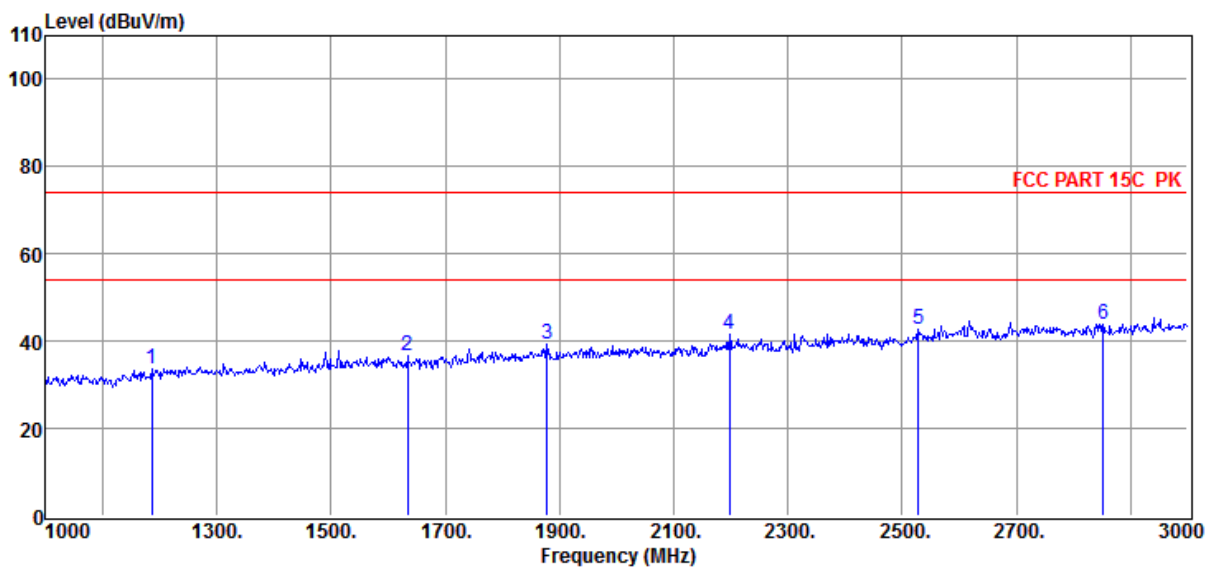

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1186.00	-5.60	33.45	74.00	-40.55	165	76	Peak	HORIZONTAL
2	1634.00	-2.32	36.54	74.00	-37.46	183	191	Peak	HORIZONTAL
3	1878.00	-0.19	39.45	74.00	-34.55	156	80	Peak	HORIZONTAL
4	2198.00	2.33	41.41	74.00	-32.59	186	117	Peak	HORIZONTAL
5	2528.00	4.29	42.76	74.00	-31.24	190	327	Peak	HORIZONTAL
6	2852.00	6.72	43.96	74.00	-30.04	187	50	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5785MHZ

Data: 464

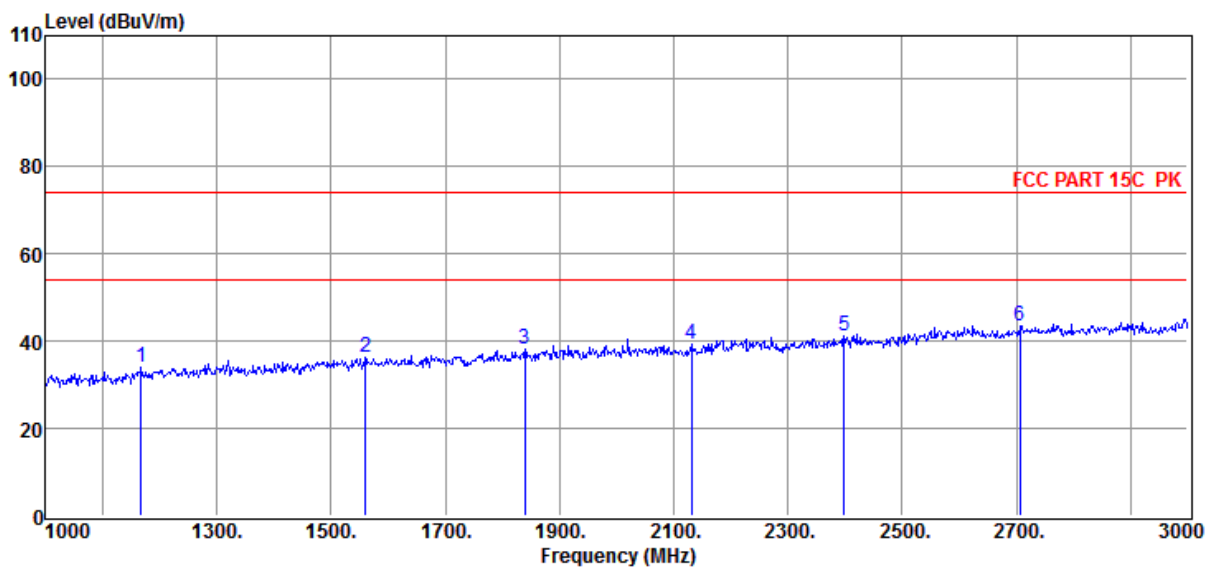

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1168.00	-5.96	33.91	74.00	-40.09	173	341	Peak	HORIZONTAL
2	1560.00	-2.42	36.30	74.00	-37.70	183	349	Peak	HORIZONTAL
3	1840.00	-0.49	38.17	74.00	-35.83	189	322	Peak	HORIZONTAL
4	2132.00	0.92	39.27	74.00	-34.73	163	141	Peak	HORIZONTAL
5	2398.00	3.32	41.20	74.00	-32.80	164	279	Peak	HORIZONTAL
6	2706.00	6.00	43.64	74.00	-30.36	173	62	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5785MHz

Data: 465

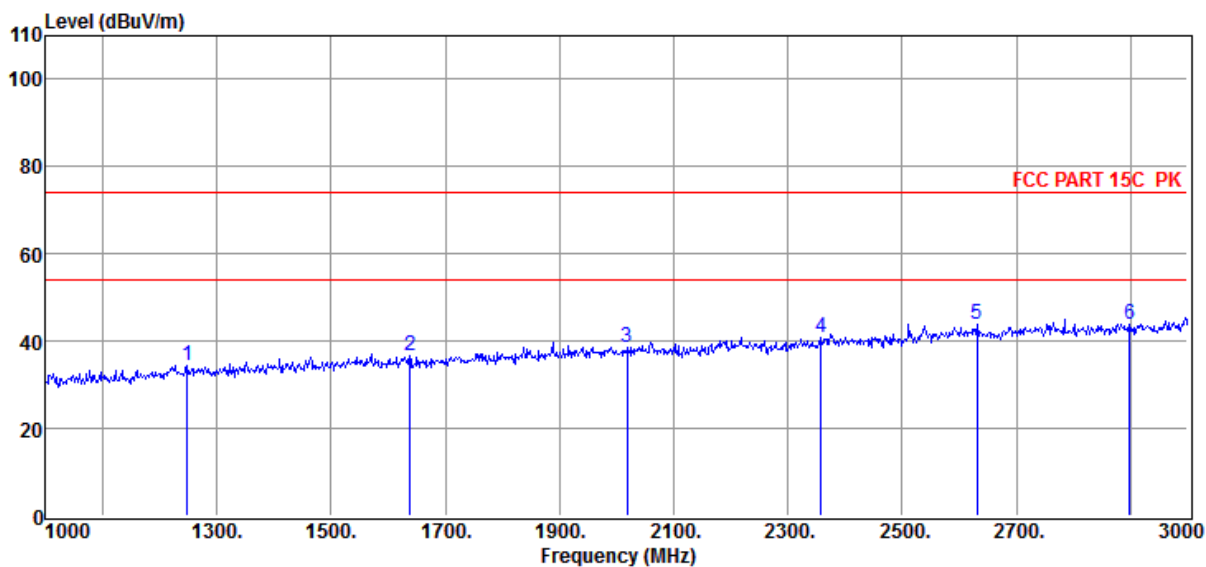

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1248.00	-4.75	34.33	74.00	-39.67	188	133	Peak	VERTICAL
2	1638.00	-2.34	36.56	74.00	-37.44	159	304	Peak	VERTICAL
3	2018.00	0.56	38.65	74.00	-35.35	155	16	Peak	VERTICAL
4	2358.00	3.21	40.86	74.00	-33.14	182	261	Peak	VERTICAL
5	2632.00	5.52	43.82	74.00	-30.18	157	278	Peak	VERTICAL
6	2898.00	6.98	44.01	74.00	-29.99	176	256	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC20 MCS0 ANT1+ANT2 5825MHZ

Data: 466

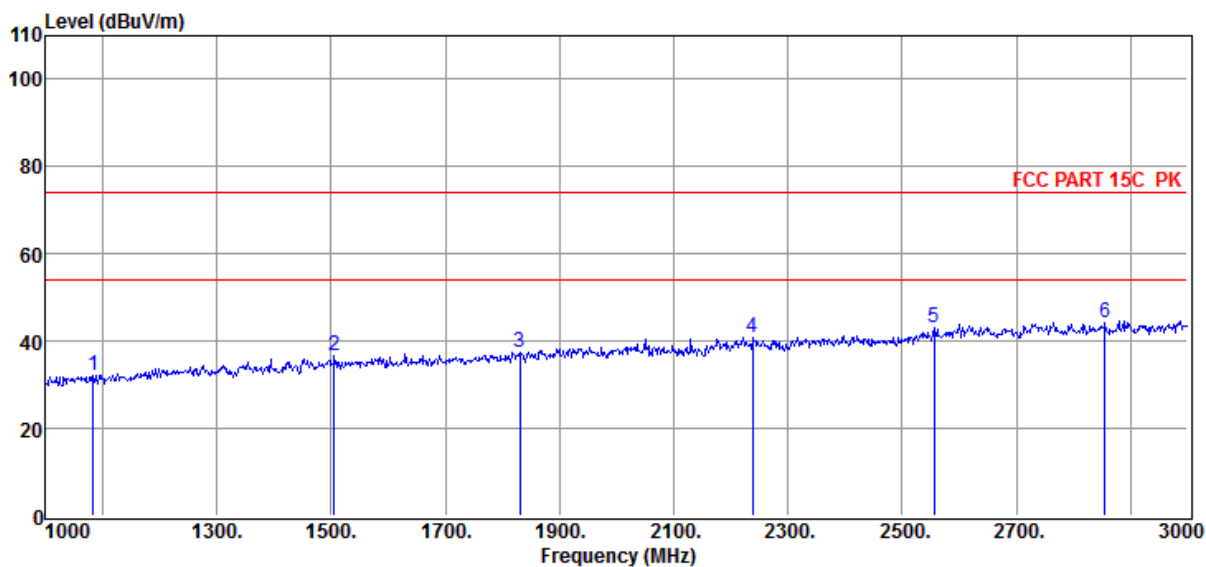

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1084.00	-6.80	32.24	74.00	-41.76	168	172	Peak	VERTICAL
2	1506.00	-2.89	36.80	74.00	-37.20	179	161	Peak	VERTICAL
3	1830.00	-0.65	37.49	74.00	-36.51	168	238	Peak	VERTICAL
4	2238.00	2.37	40.80	74.00	-33.20	154	77	Peak	VERTICAL
5	2556.00	4.92	43.18	74.00	-30.82	188	79	Peak	VERTICAL
6	2856.00	6.75	44.19	74.00	-29.81	159	172	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC20 MCS0 ANT1+ANT2 5825MHZ

Data: 467

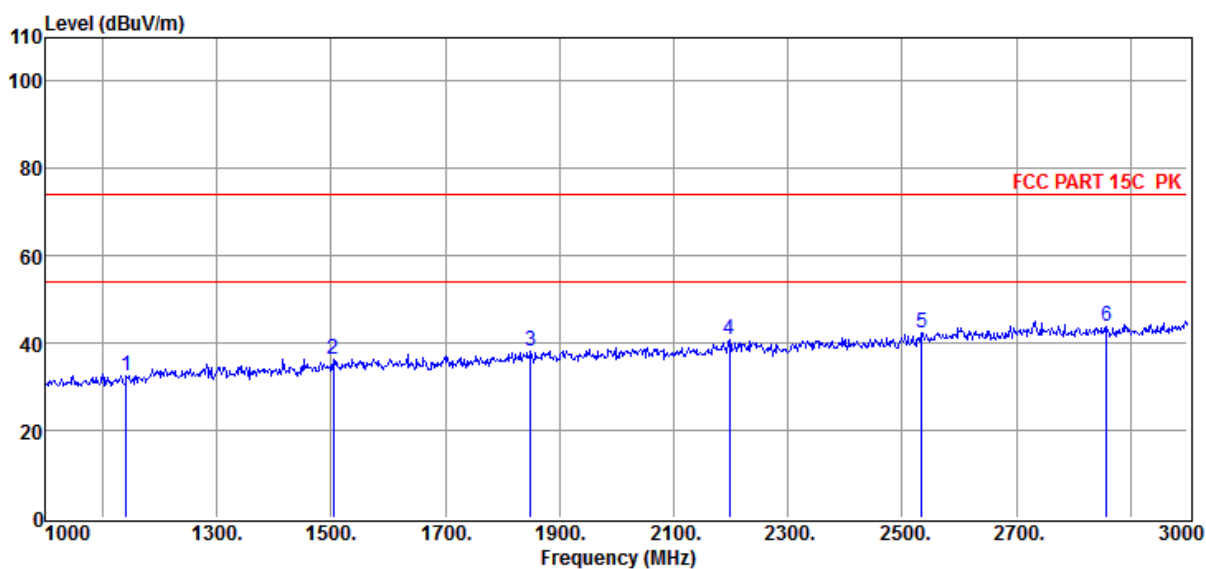

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1142.00	-6.39	32.53	74.00	-41.47	188	234	Peak	HORIZONTAL
2	1504.00	-2.91	36.19	74.00	-37.81	157	134	Peak	HORIZONTAL
3	1850.00	-0.33	38.24	74.00	-35.76	155	108	Peak	HORIZONTAL
4	2198.00	2.33	40.83	74.00	-33.17	162	283	Peak	HORIZONTAL
5	2534.00	4.42	42.44	74.00	-31.56	168	226	Peak	HORIZONTAL
6	2858.00	6.76	43.82	74.00	-30.18	166	131	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC40 MCS0 ANT1+ANT2 5190MHZ

Data: 468

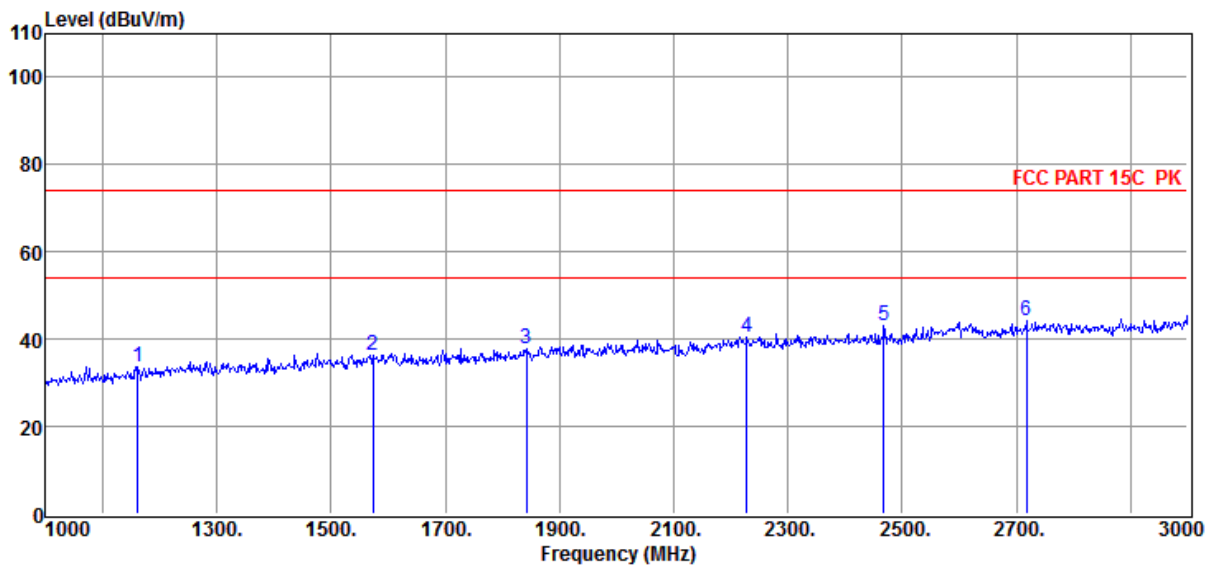

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1162.00	-6.08	33.77	74.00	-40.23	177	217	Peak	HORIZONTAL
2	1574.00	-2.37	36.47	74.00	-37.53	185	195	Peak	HORIZONTAL
3	1842.00	-0.46	37.64	74.00	-36.36	161	141	Peak	HORIZONTAL
4	2228.00	2.37	40.53	74.00	-33.47	151	214	Peak	HORIZONTAL
5	2468.00	3.42	42.91	74.00	-31.09	173	51	Peak	HORIZONTAL
6	2718.00	6.18	44.41	74.00	-29.59	155	133	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC40 MCS0 ANT1+ANT2 5190MHz

Data: 469

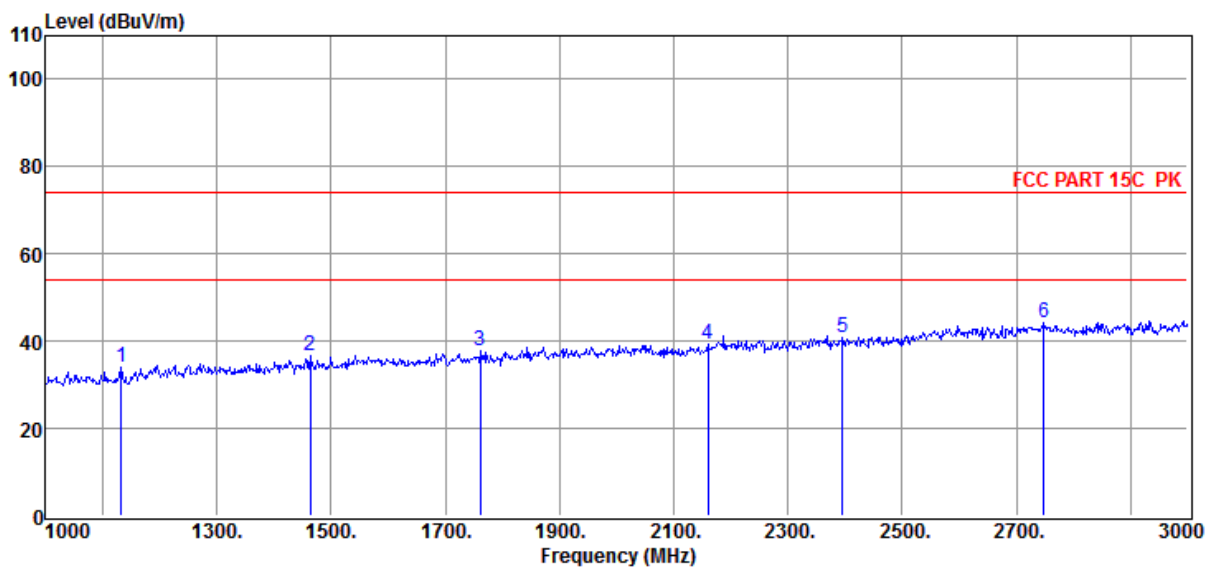

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1132.00	-6.48	33.86	74.00	-40.14	152	78	Peak	VERTICAL
2	1464.00	-3.33	36.78	74.00	-37.22	176	92	Peak	VERTICAL
3	1762.00	-1.37	37.98	74.00	-36.02	167	195	Peak	VERTICAL
4	2160.00	1.39	39.30	74.00	-34.70	155	316	Peak	VERTICAL
5	2396.00	3.32	40.82	74.00	-33.18	170	330	Peak	VERTICAL
6	2748.00	6.62	44.21	74.00	-29.79	169	200	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC40 MCS0 ANT1+ANT2 5230MHz

Data: 470

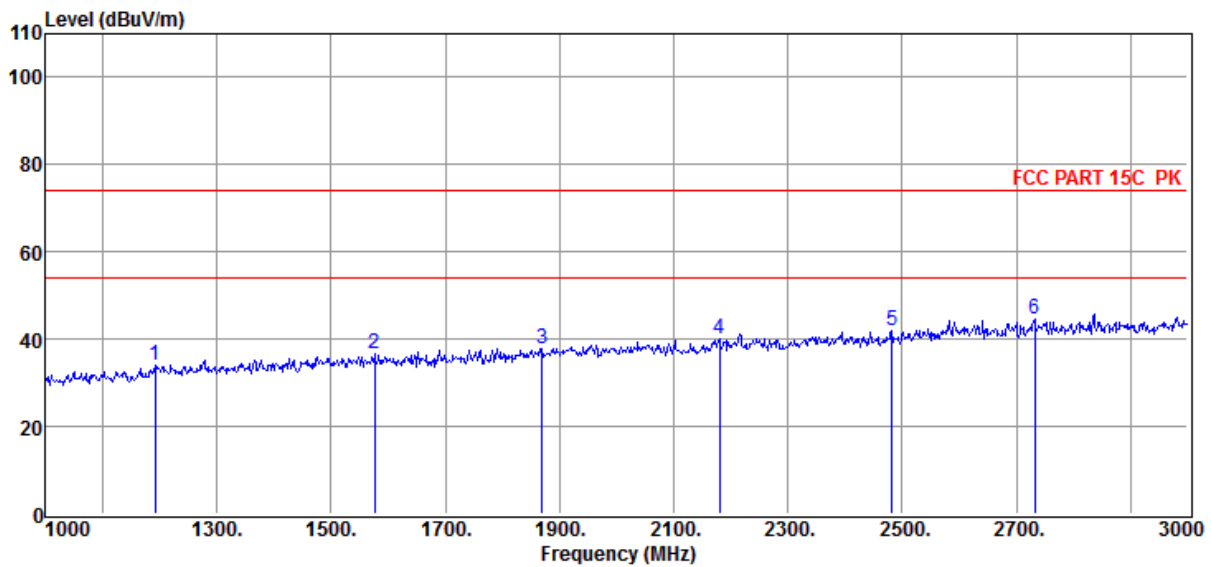

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1192.00	-5.48	33.95	74.00	-40.05	180	87	Peak	VERTICAL
2	1576.00	-2.37	36.60	74.00	-37.40	188	82	Peak	VERTICAL
3	1870.00	-0.23	37.78	74.00	-36.22	177	195	Peak	VERTICAL
4	2180.00	1.88	40.24	74.00	-33.76	151	292	Peak	VERTICAL
5	2482.00	3.51	42.00	74.00	-32.00	184	128	Peak	VERTICAL
6	2732.00	6.38	44.51	74.00	-29.49	177	286	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC40 MCS0 ANT1+ANT2 5230MHz

Data: 471

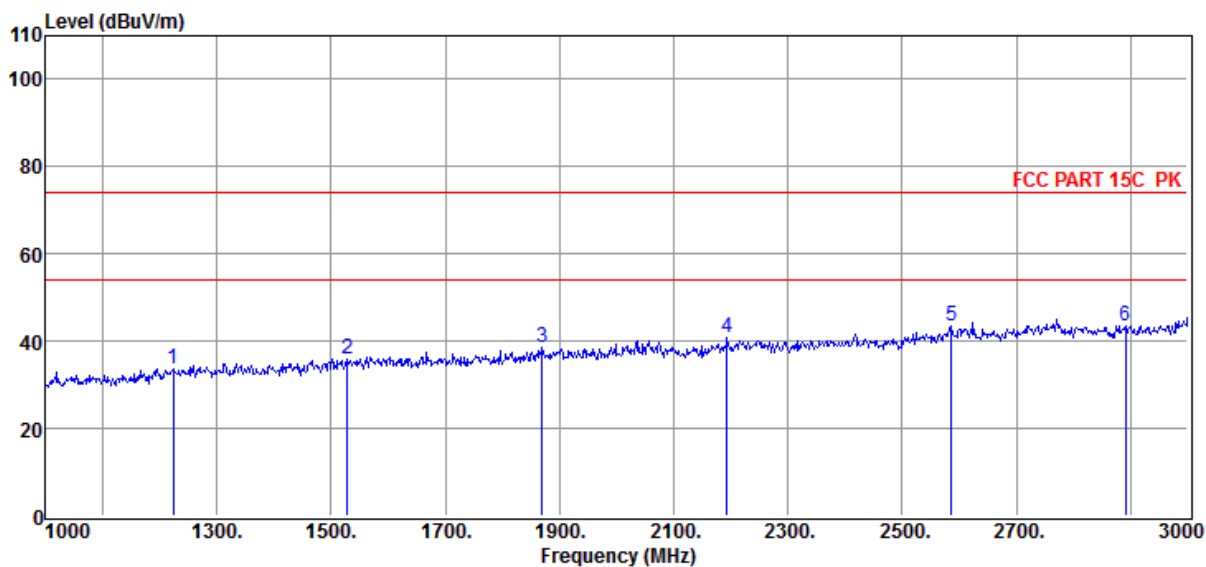

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1224.00	-5.03	33.48	74.00	-40.52	150	1	Peak	HORIZONTAL
2	1528.00	-2.67	35.91	74.00	-38.09	167	322	Peak	HORIZONTAL
3	1870.00	-0.23	38.59	74.00	-35.41	166	262	Peak	HORIZONTAL
4	2194.00	2.23	40.90	74.00	-33.10	173	356	Peak	HORIZONTAL
5	2586.00	5.60	43.40	74.00	-30.60	175	143	Peak	HORIZONTAL
6	2892.00	6.94	43.59	74.00	-30.41	181	195	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC40 MCS0 ANT1+ANT2 5270MHz

Data: 472

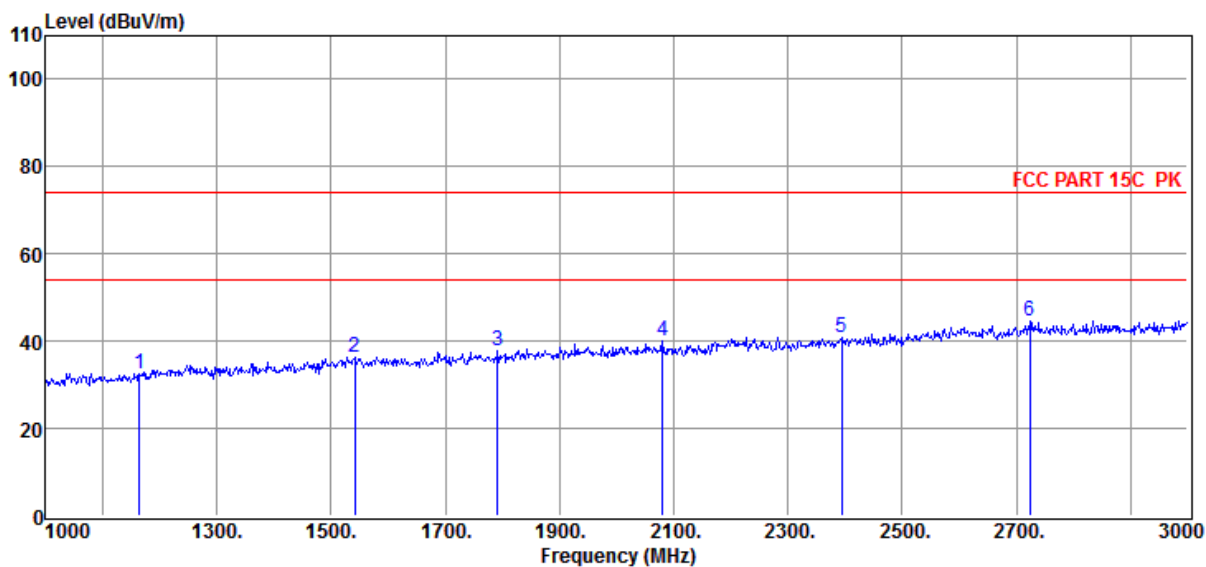

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1164.00	-6.04	32.57	74.00	-41.43	151	23	Peak	HORIZONTAL
2	1542.00	-2.54	36.31	74.00	-37.69	163	38	Peak	HORIZONTAL
3	1792.00	-1.18	37.82	74.00	-36.18	182	207	Peak	HORIZONTAL
4	2080.00	0.76	39.97	74.00	-34.03	173	158	Peak	HORIZONTAL
5	2394.00	3.31	40.80	74.00	-33.20	169	245	Peak	HORIZONTAL
6	2724.00	6.27	44.76	74.00	-29.24	180	319	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC40 MCS0 ANT1+ANT2 5270MHz

Data: 473

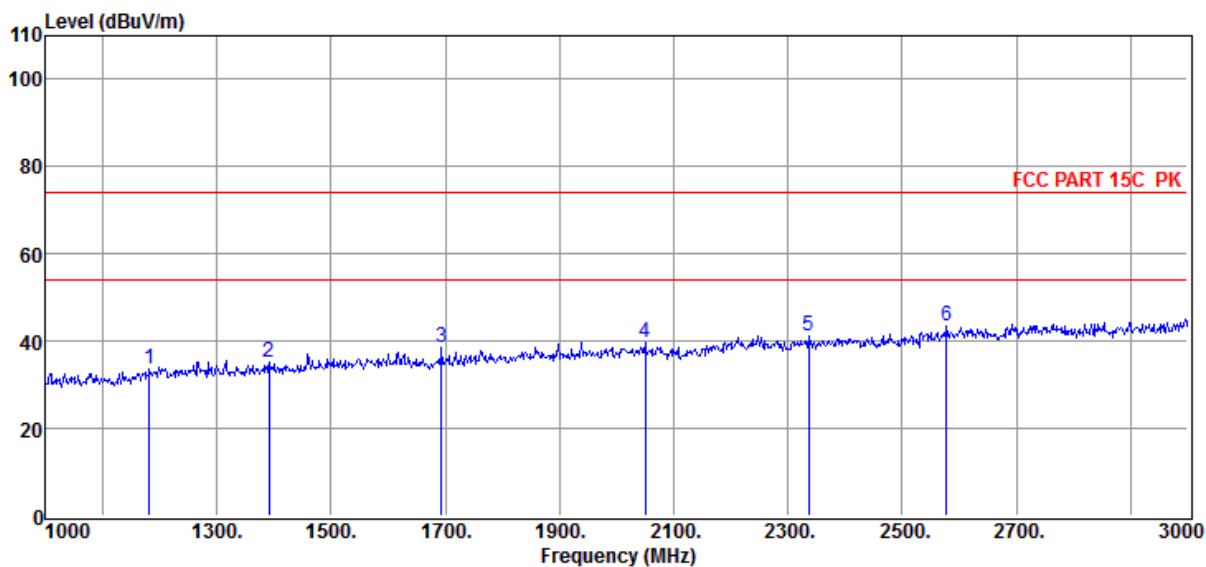

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1182.00	-5.68	33.75	74.00	-40.25	176	288	Peak	VERTICAL
2	1392.00	-4.14	35.06	74.00	-38.94	150	192	Peak	VERTICAL
3	1694.00	-2.03	38.37	74.00	-35.63	183	43	Peak	VERTICAL
4	2050.00	1.16	39.79	74.00	-34.21	168	238	Peak	VERTICAL
5	2336.00	2.82	41.30	74.00	-32.70	167	119	Peak	VERTICAL
6	2578.00	5.42	43.50	74.00	-30.50	175	258	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC40 MCS0 ANT1+ANT2 5310MHz

Data: 474

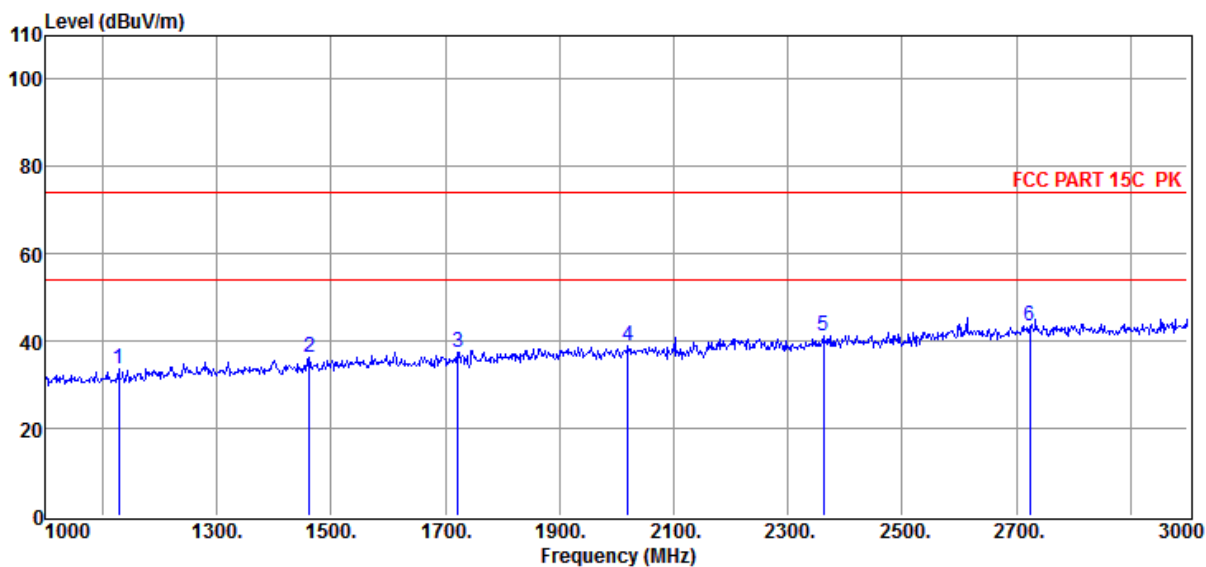

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1128.00	-6.51	33.62	74.00	-40.38	167	215	Peak	VERTICAL
2	1462.00	-3.35	36.14	74.00	-37.86	170	106	Peak	VERTICAL
3	1722.00	-1.74	37.40	74.00	-36.60	152	309	Peak	VERTICAL
4	2020.00	0.60	38.95	74.00	-35.05	180	60	Peak	VERTICAL
5	2362.00	3.22	41.07	74.00	-32.93	166	348	Peak	VERTICAL
6	2724.00	6.27	43.53	74.00	-30.47	150	299	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC40 MCS0 ANT1+ANT2 5310MHZ

Data: 475

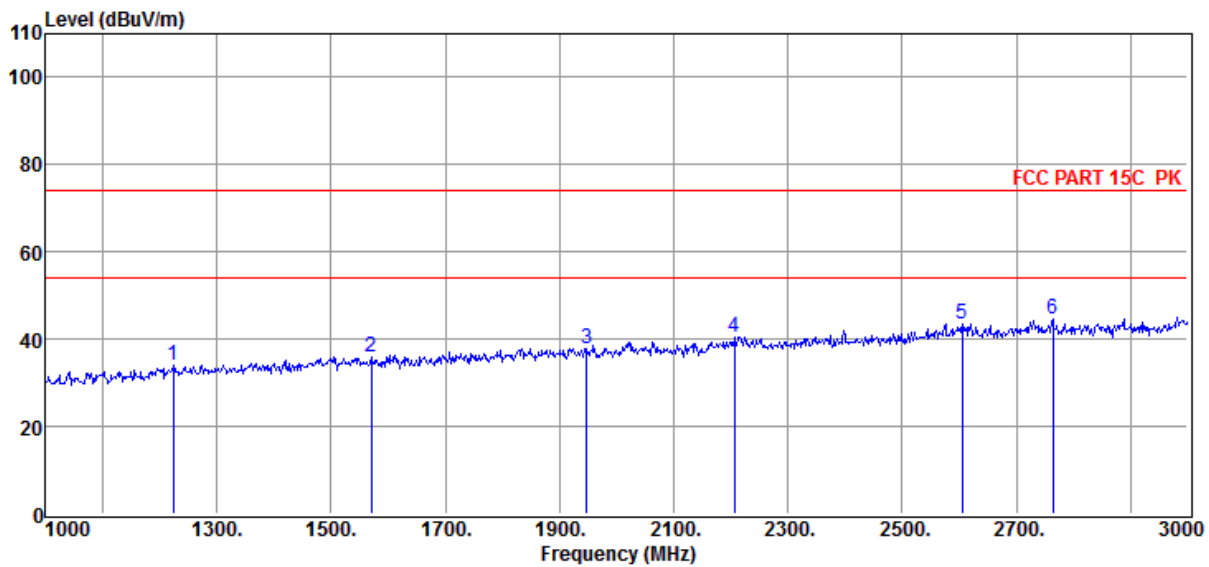

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1224.00	-5.03	34.03	74.00	-39.97	167	109	Peak	HORIZONTAL
2	1570.00	-2.39	35.98	74.00	-38.02	185	63	Peak	HORIZONTAL
3	1948.00	0.29	37.94	74.00	-36.06	187	254	Peak	HORIZONTAL
4	2206.00	2.37	40.51	74.00	-33.49	164	275	Peak	HORIZONTAL
5	2606.00	5.83	43.32	74.00	-30.68	176	172	Peak	HORIZONTAL
6	2764.00	6.57	44.70	74.00	-29.30	188	295	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC40 MCS0 ANT1+ANT2 5510MHz

Data: 476

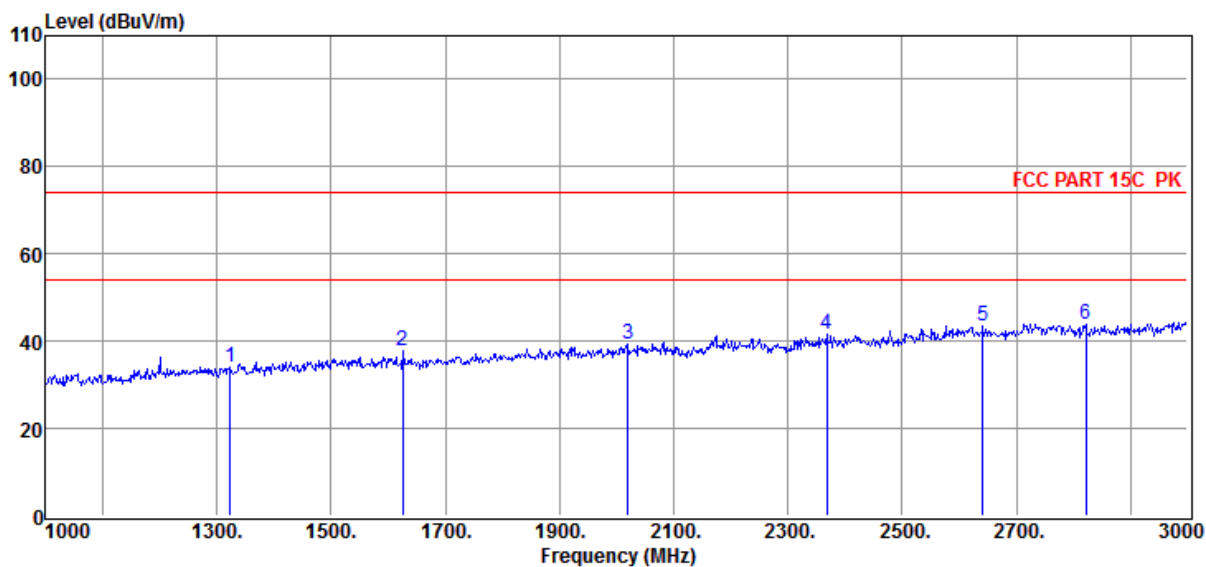

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1324.00	-4.53	34.17	74.00	-39.83	186	249	Peak	HORIZONTAL
2	1626.00	-2.32	37.79	74.00	-36.21	169	144	Peak	HORIZONTAL
3	2020.00	0.60	39.34	74.00	-34.66	182	46	Peak	HORIZONTAL
4	2368.00	3.24	41.55	74.00	-32.45	171	4	Peak	HORIZONTAL
5	2642.00	5.39	43.29	74.00	-30.71	151	358	Peak	HORIZONTAL
6	2822.00	6.53	43.70	74.00	-30.30	164	99	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC40 MCS0 ANT1+ANT2 5510MHZ

Data: 477

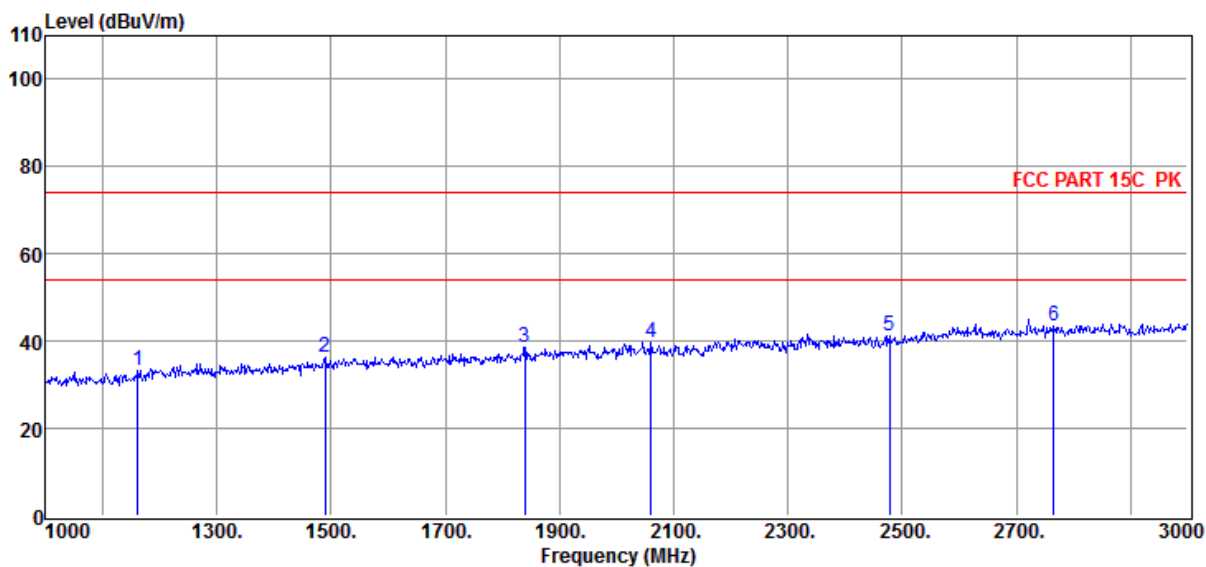

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1162.00	-6.08	33.37	74.00	-40.63	180	246	Peak	VERTICAL
2	1490.00	-3.06	36.45	74.00	-37.55	164	330	Peak	VERTICAL
3	1840.00	-0.49	38.72	74.00	-35.28	168	238	Peak	VERTICAL
4	2060.00	1.03	39.66	74.00	-34.34	174	21	Peak	VERTICAL
5	2478.00	3.49	41.39	74.00	-32.61	156	23	Peak	VERTICAL
6	2766.00	6.57	43.66	74.00	-30.34	168	280	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC40 MCS0 ANT1+ANT2 5550MHZ

Data: 478

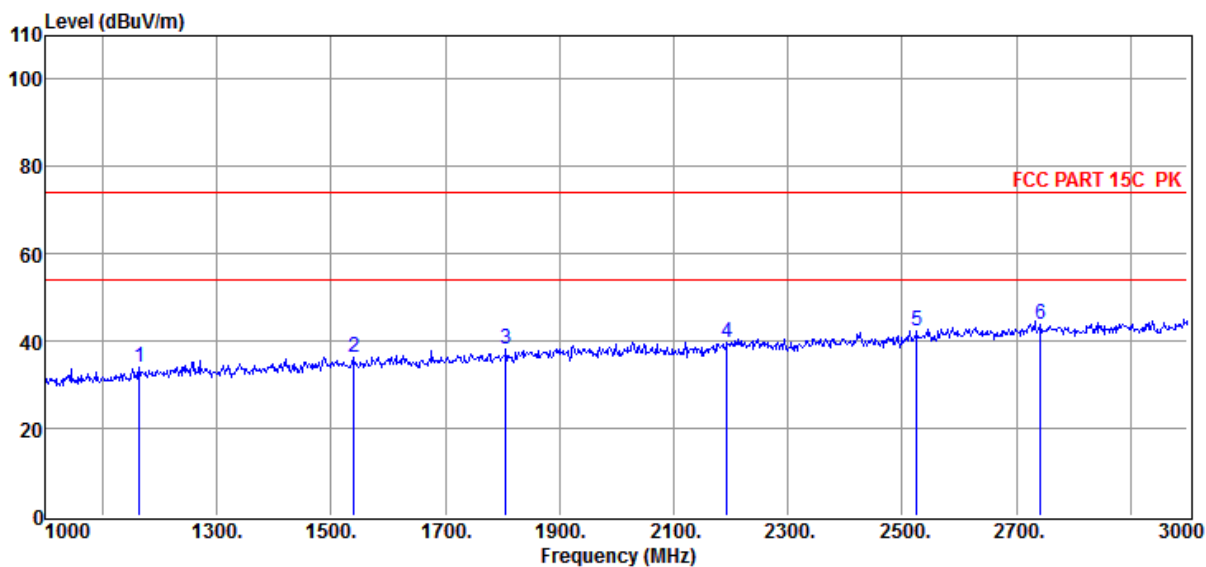

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1164.00	-6.04	33.83	74.00	-40.17	171	299	Peak	VERTICAL
2	1540.00	-2.56	36.40	74.00	-37.60	190	267	Peak	VERTICAL
3	1806.00	-1.03	38.07	74.00	-35.93	164	35	Peak	VERTICAL
4	2194.00	2.23	39.85	74.00	-34.15	159	12	Peak	VERTICAL
5	2526.00	4.24	42.45	74.00	-31.55	152	244	Peak	VERTICAL
6	2742.00	6.53	43.93	74.00	-30.07	156	188	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC40 MCS0 ANT1+ANT2 5550MHZ

Data: 479

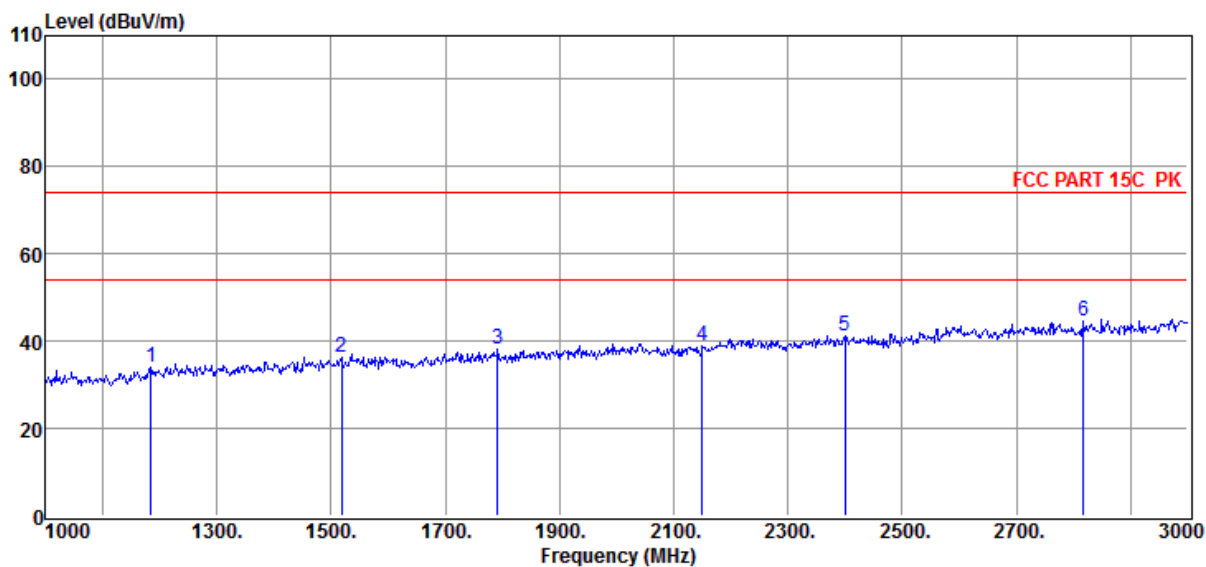

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1184.00	-5.64	34.03	74.00	-39.97	156	31	Peak	HORIZONTAL
2	1518.00	-2.77	36.38	74.00	-37.62	179	143	Peak	HORIZONTAL
3	1792.00	-1.18	38.01	74.00	-35.99	151	277	Peak	HORIZONTAL
4	2150.00	1.15	38.92	74.00	-35.08	178	112	Peak	HORIZONTAL
5	2400.00	3.33	41.32	74.00	-32.68	163	122	Peak	HORIZONTAL
6	2818.00	6.49	44.69	74.00	-29.31	175	226	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3'C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC40 MCS0 ANT1+ANT2 5670MHZ

Data: 480

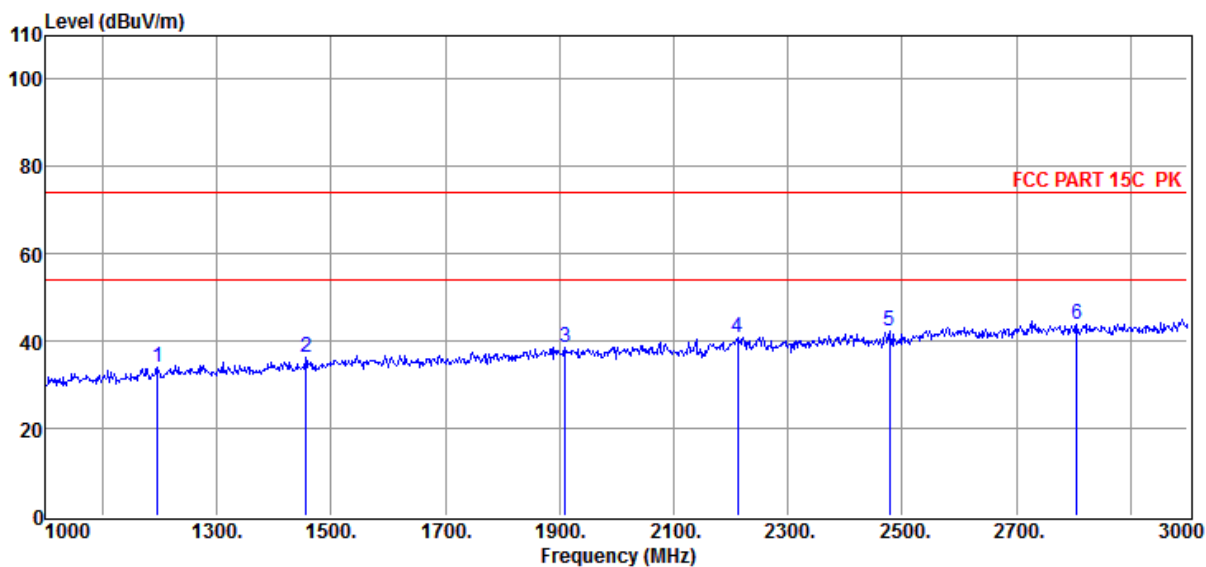

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1196.00	-5.40	34.01	74.00	-39.99	184	26	Peak	HORIZONTAL
2	1456.00	-3.42	36.35	74.00	-37.65	158	154	Peak	HORIZONTAL
3	1910.00	0.00	38.55	74.00	-35.45	155	223	Peak	HORIZONTAL
4	2212.00	2.37	40.92	74.00	-33.08	153	356	Peak	HORIZONTAL
5	2478.00	3.49	42.23	74.00	-31.77	151	235	Peak	HORIZONTAL
6	2806.00	6.42	43.96	74.00	-30.04	162	348	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC40 MCS0 ANT1+ANT2 5670MHZ

Data: 481

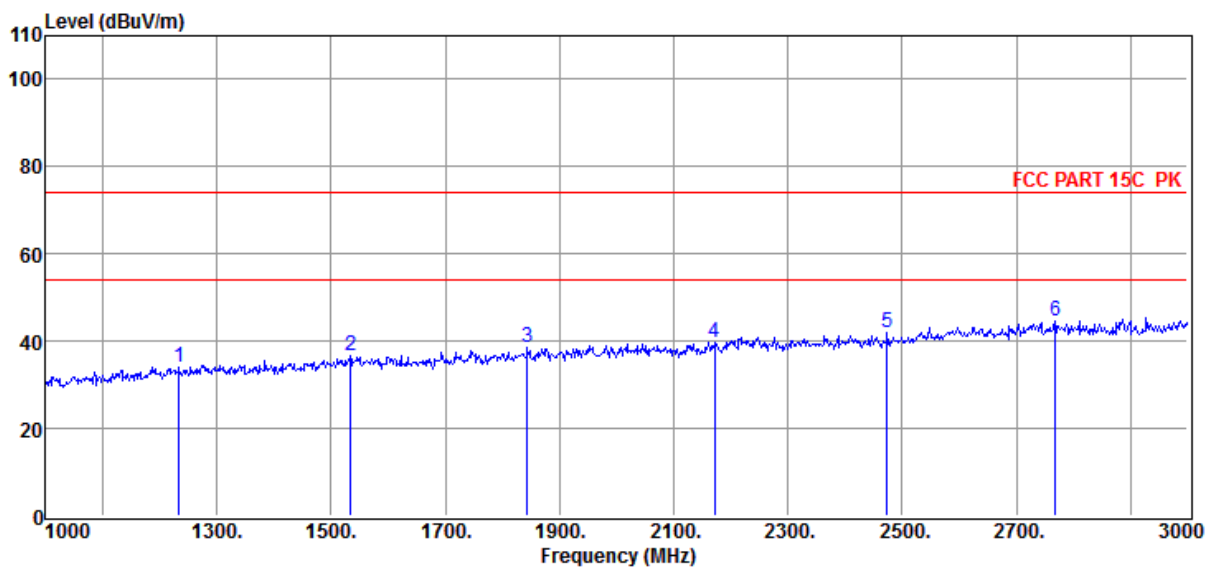

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1234.00	-4.91	33.98	74.00	-40.02	178	219	Peak	VERTICAL
2	1534.00	-2.62	36.60	74.00	-37.40	157	17	Peak	VERTICAL
3	1844.00	-0.43	38.61	74.00	-35.39	165	2	Peak	VERTICAL
4	2172.00	1.68	39.70	74.00	-34.30	180	107	Peak	VERTICAL
5	2474.00	3.45	41.81	74.00	-32.19	151	106	Peak	VERTICAL
6	2768.00	6.55	44.78	74.00	-29.22	156	9	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC40 MCS0 ANT1+ANT2 5755MHz

Data: 482

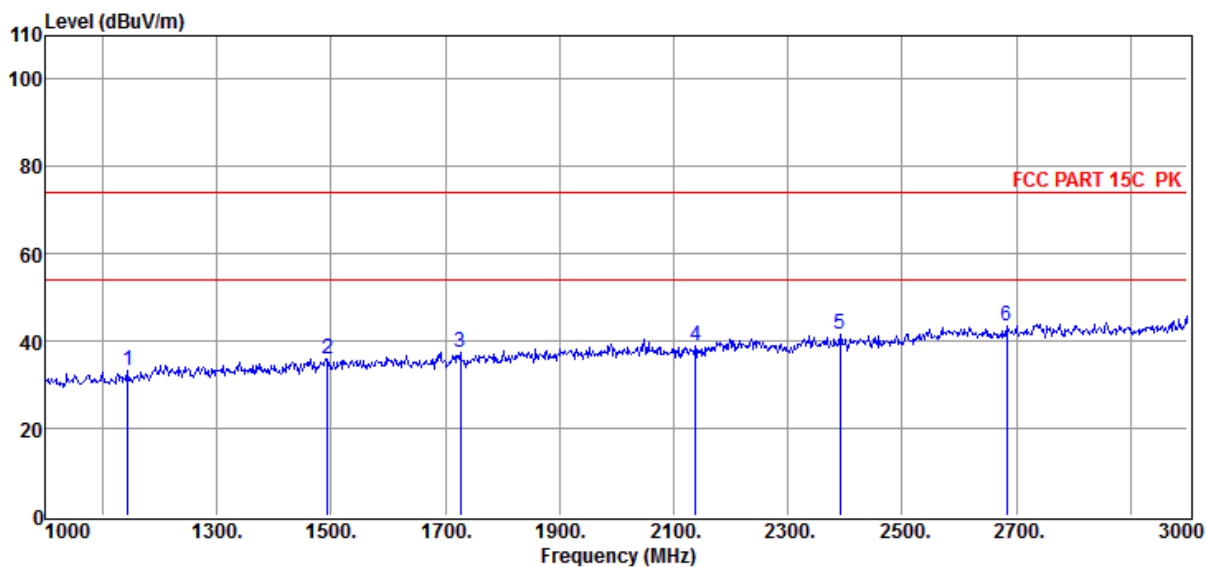

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1144.00	-6.38	33.32	74.00	-40.68	168	69	Peak	VERTICAL
2	1494.00	-3.01	35.81	74.00	-38.19	160	81	Peak	VERTICAL
3	1726.00	-1.70	37.32	74.00	-36.68	178	156	Peak	VERTICAL
4	2138.00	0.99	38.77	74.00	-35.23	151	125	Peak	VERTICAL
5	2392.00	3.31	41.47	74.00	-32.53	150	42	Peak	VERTICAL
6	2684.00	5.72	43.46	74.00	-30.54	151	164	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC40 MCS0 ANT1+ANT2 5755MHZ

Data: 483

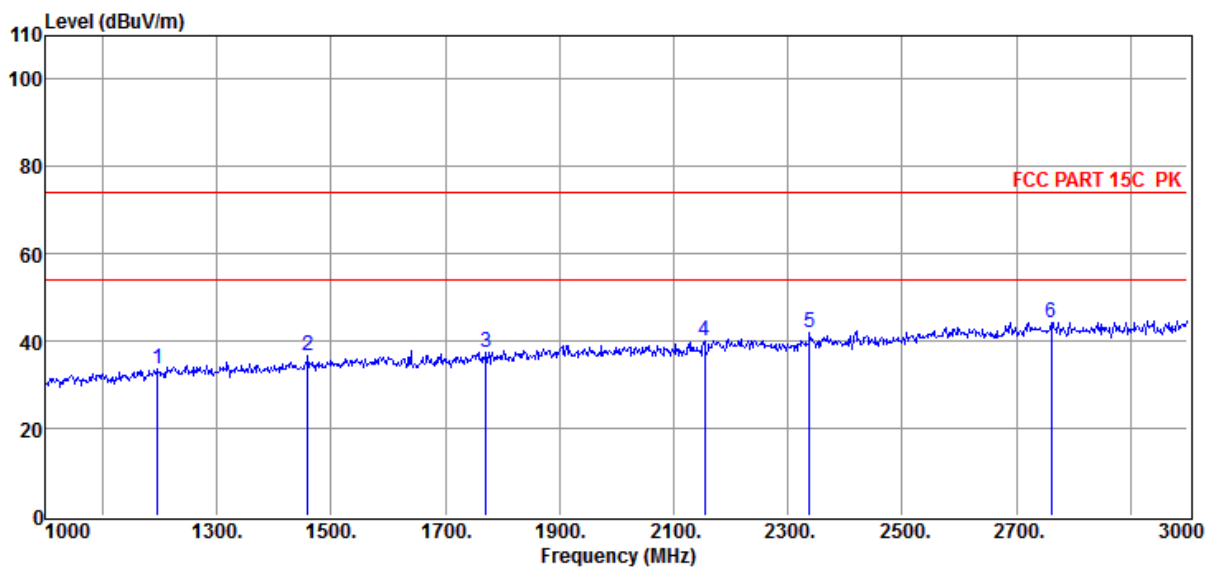

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1196.00	-5.40	33.52	74.00	-40.48	177	183	Peak	HORIZONTAL
2	1460.00	-3.37	36.54	74.00	-37.46	154	324	Peak	HORIZONTAL
3	1772.00	-1.31	37.58	74.00	-36.42	164	228	Peak	HORIZONTAL
4	2154.00	1.25	40.05	74.00	-33.95	169	189	Peak	HORIZONTAL
5	2338.00	2.88	42.04	74.00	-31.96	156	208	Peak	HORIZONTAL
6	2762.00	6.59	44.33	74.00	-29.67	163	238	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC40 MCS0 ANT1+ANT2 5795MHz

Data: 484

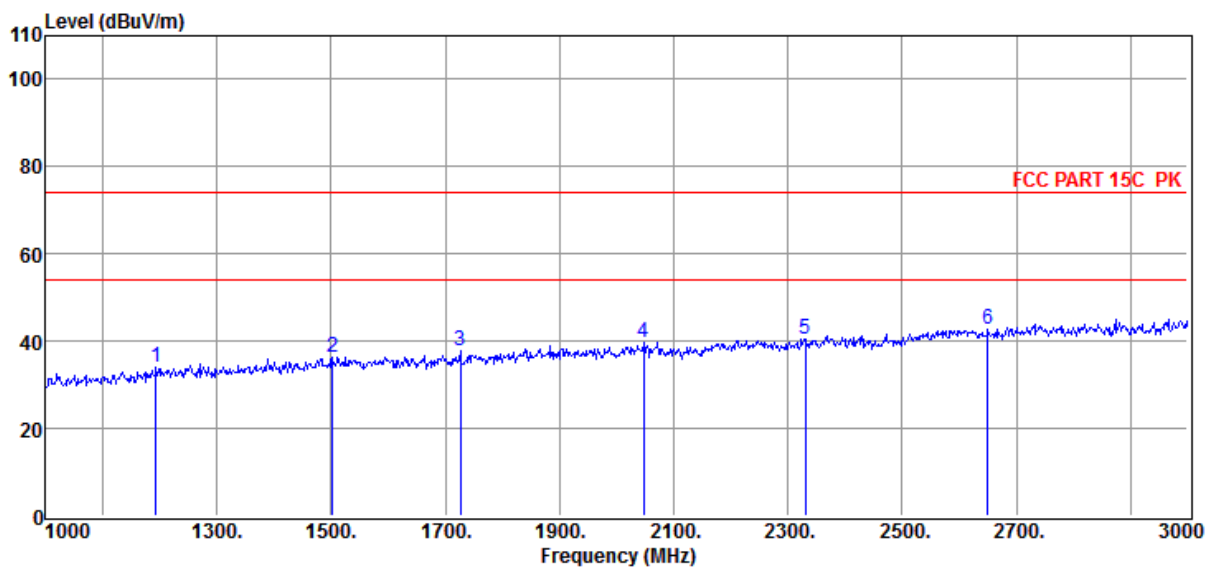

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1194.00	-5.44	34.16	74.00	-39.84	181	174	Peak	HORIZONTAL
2	1502.00	-2.93	36.31	74.00	-37.69	158	293	Peak	HORIZONTAL
3	1726.00	-1.70	37.83	74.00	-36.17	186	339	Peak	HORIZONTAL
4	2048.00	1.12	39.75	74.00	-34.25	173	287	Peak	HORIZONTAL
5	2330.00	2.67	40.48	74.00	-33.52	158	257	Peak	HORIZONTAL
6	2650.00	5.30	42.63	74.00	-31.37	183	59	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC40 MCS0 ANT1+ANT2 5795MHZ

Data: 485

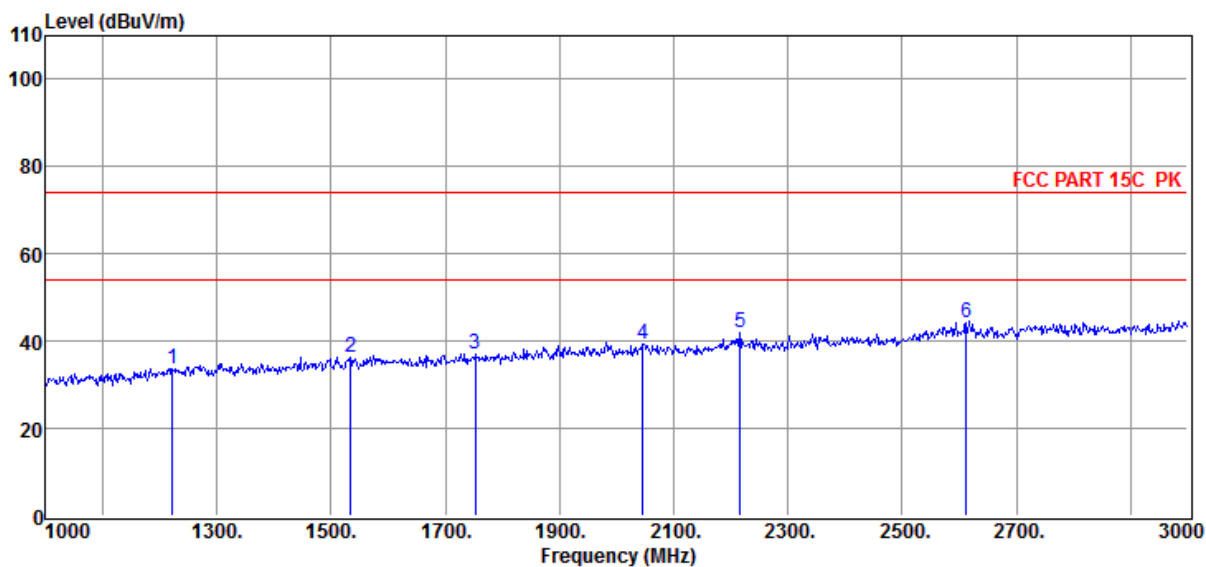

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1222.00	-5.05	33.82	74.00	-40.18	159	94	Peak	VERTICAL
2	1534.00	-2.62	36.20	74.00	-37.80	165	176	Peak	VERTICAL
3	1752.00	-1.43	37.15	74.00	-36.85	152	317	Peak	VERTICAL
4	2046.00	1.08	39.38	74.00	-34.62	173	217	Peak	VERTICAL
5	2216.00	2.37	41.82	74.00	-32.18	168	205	Peak	VERTICAL
6	2612.00	5.76	44.15	74.00	-29.85	175	40	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC80 MCS0 ANT1+ANT2 5210MHZ

Data: 486

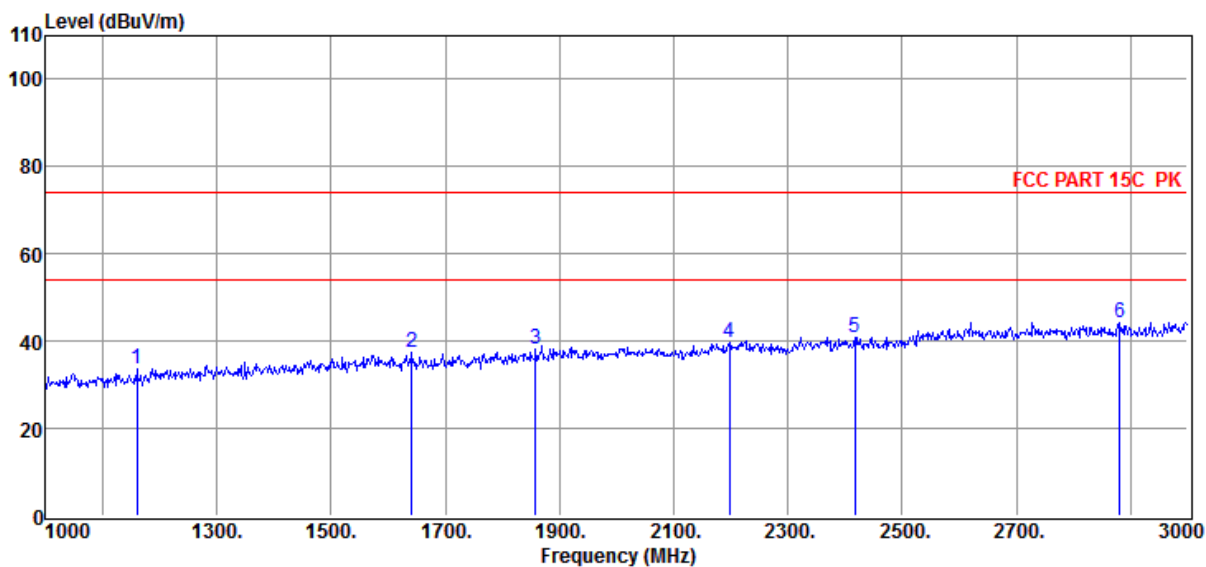

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1160.00	-6.12	33.47	74.00	-40.53	184	342	Peak	VERTICAL
2	1642.00	-2.34	37.29	74.00	-36.71	179	118	Peak	VERTICAL
3	1858.00	-0.29	38.08	74.00	-35.92	154	160	Peak	VERTICAL
4	2198.00	2.33	39.70	74.00	-34.30	159	358	Peak	VERTICAL
5	2418.00	3.32	40.87	74.00	-33.13	174	306	Peak	VERTICAL
6	2882.00	6.89	44.16	74.00	-29.84	189	178	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC80 MCS0 ANT1+ANT2 5210MHz

Data: 487

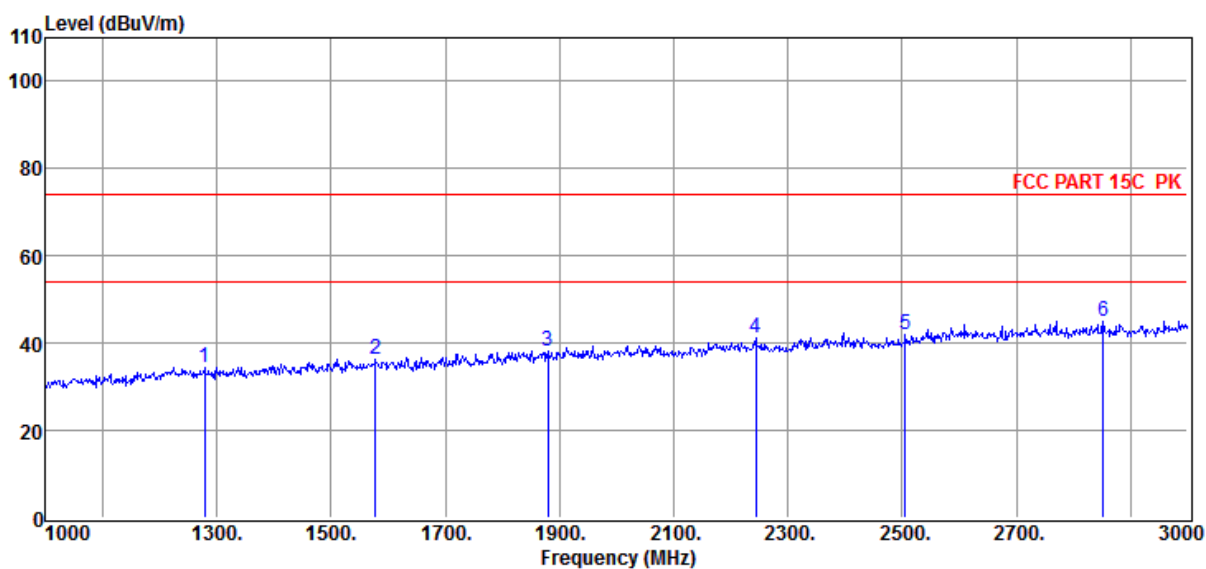

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1278.00	-4.70	34.54	74.00	-39.46	165	330	Peak	HORIZONTAL
2	1578.00	-2.36	36.19	74.00	-37.81	184	228	Peak	HORIZONTAL
3	1880.00	-0.17	38.26	74.00	-35.74	160	73	Peak	HORIZONTAL
4	2244.00	2.37	41.30	74.00	-32.70	160	198	Peak	HORIZONTAL
5	2506.00	3.78	41.82	74.00	-32.18	166	261	Peak	HORIZONTAL
6	2852.00	6.72	44.83	74.00	-29.17	161	302	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC80 MCS0 ANT1+ANT2 5290MHz

Data: 488

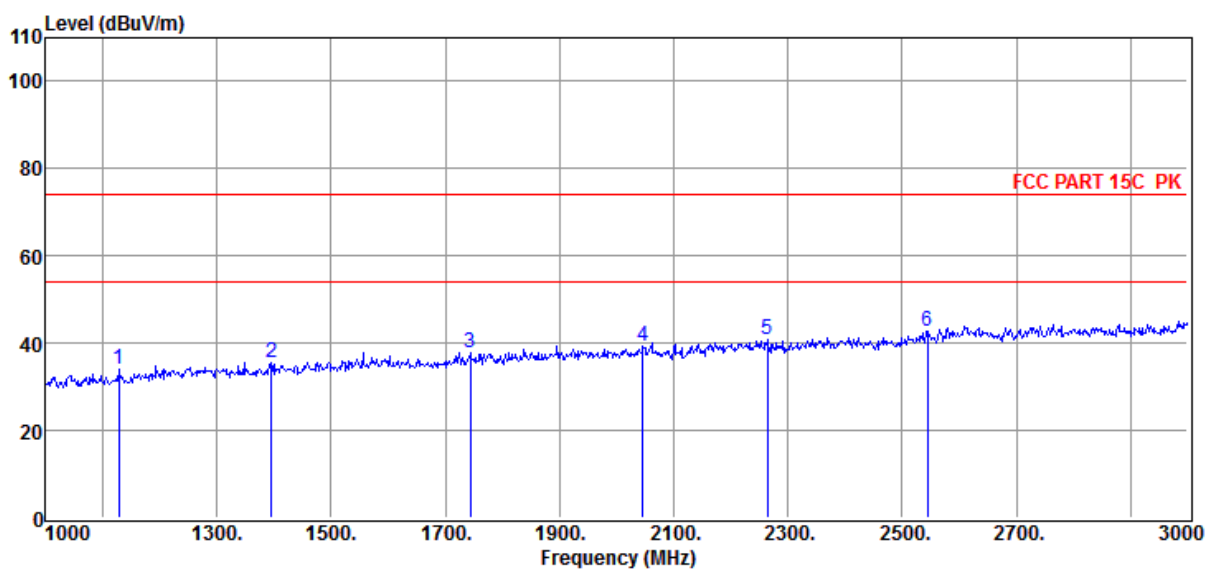

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1128.00	-6.51	34.10	74.00	-39.90	177	224	Peak	HORIZONTAL
2	1396.00	-4.12	35.61	74.00	-38.39	153	325	Peak	HORIZONTAL
3	1744.00	-1.51	37.81	74.00	-36.19	156	355	Peak	HORIZONTAL
4	2046.00	1.08	39.16	74.00	-34.84	188	48	Peak	HORIZONTAL
5	2264.00	2.24	40.96	74.00	-33.04	158	307	Peak	HORIZONTAL
6	2544.00	4.65	42.74	74.00	-31.26	170	260	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC80 MCS0 ANT1+ANT2 5290MHz

Data: 489

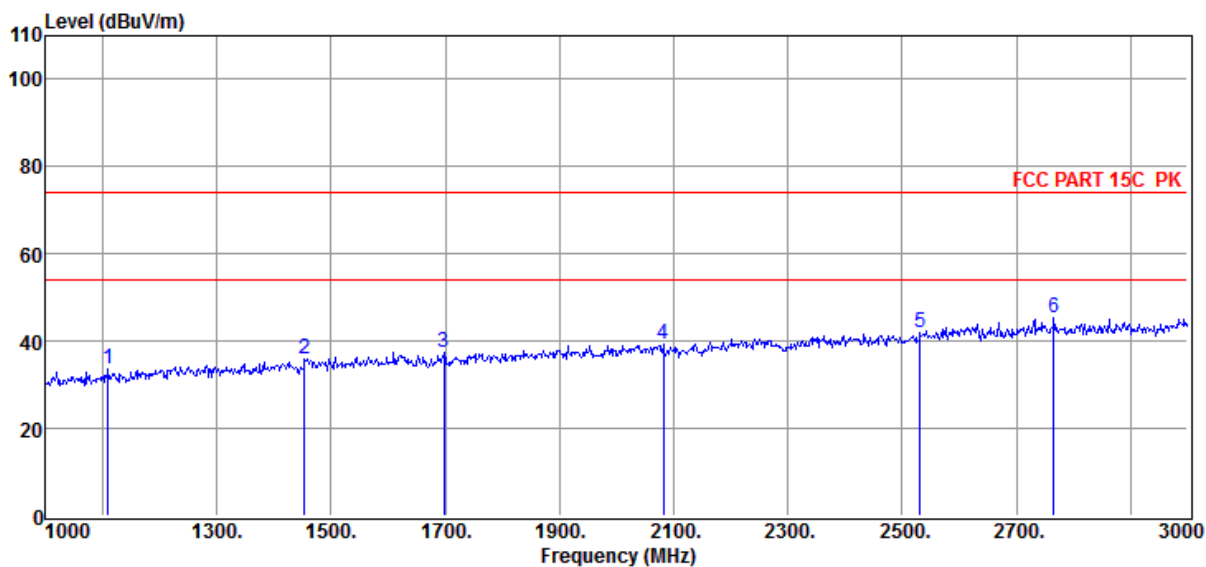

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1110.00	-6.66	33.67	74.00	-40.33	163	213	Peak	VERTICAL
2	1454.00	-3.44	35.92	74.00	-38.08	175	57	Peak	VERTICAL
3	1698.00	-2.00	37.35	74.00	-36.65	177	23	Peak	VERTICAL
4	2082.00	0.74	39.29	74.00	-34.71	163	269	Peak	VERTICAL
5	2532.00	4.37	41.91	74.00	-32.09	157	310	Peak	VERTICAL
6	2766.00	6.57	45.19	74.00	-28.81	155	274	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC80 MCS0 ANT1+ANT2 5530MHZ

Data: 490

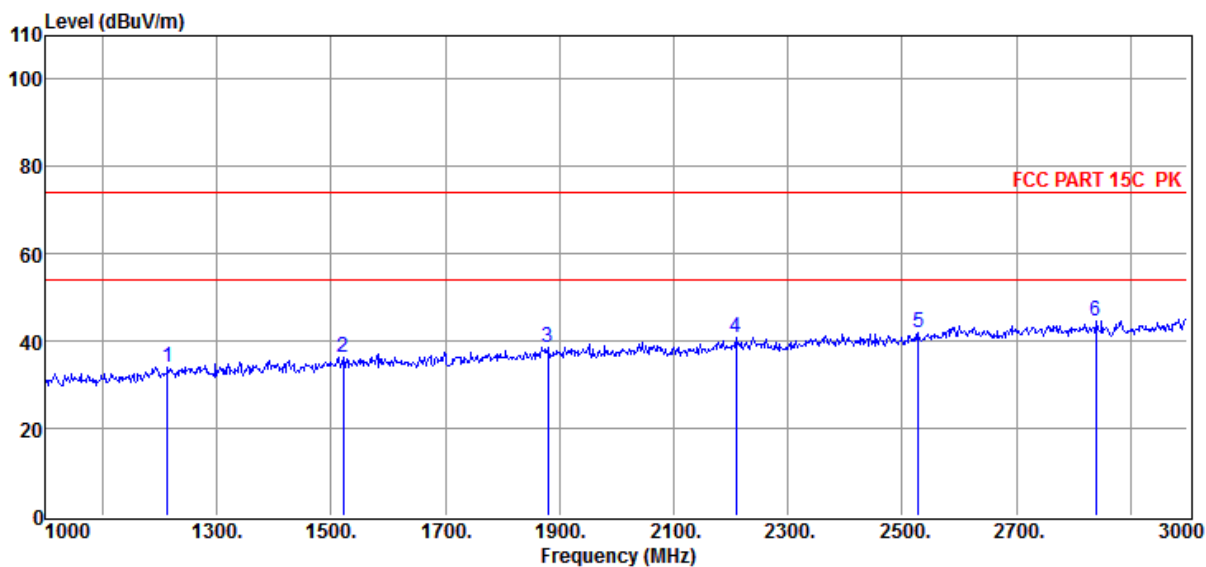

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1214.00	-5.15	33.96	74.00	-40.04	168	110	Peak	VERTICAL
2	1522.00	-2.74	36.41	74.00	-37.59	163	282	Peak	VERTICAL
3	1880.00	-0.17	38.63	74.00	-35.37	179	2	Peak	VERTICAL
4	2210.00	2.37	41.00	74.00	-33.00	184	221	Peak	VERTICAL
5	2528.00	4.29	41.89	74.00	-32.11	183	278	Peak	VERTICAL
6	2840.00	6.64	44.64	74.00	-29.36	185	308	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC80 MCS0 ANT1+ANT2 5530MHZ

Data: 491

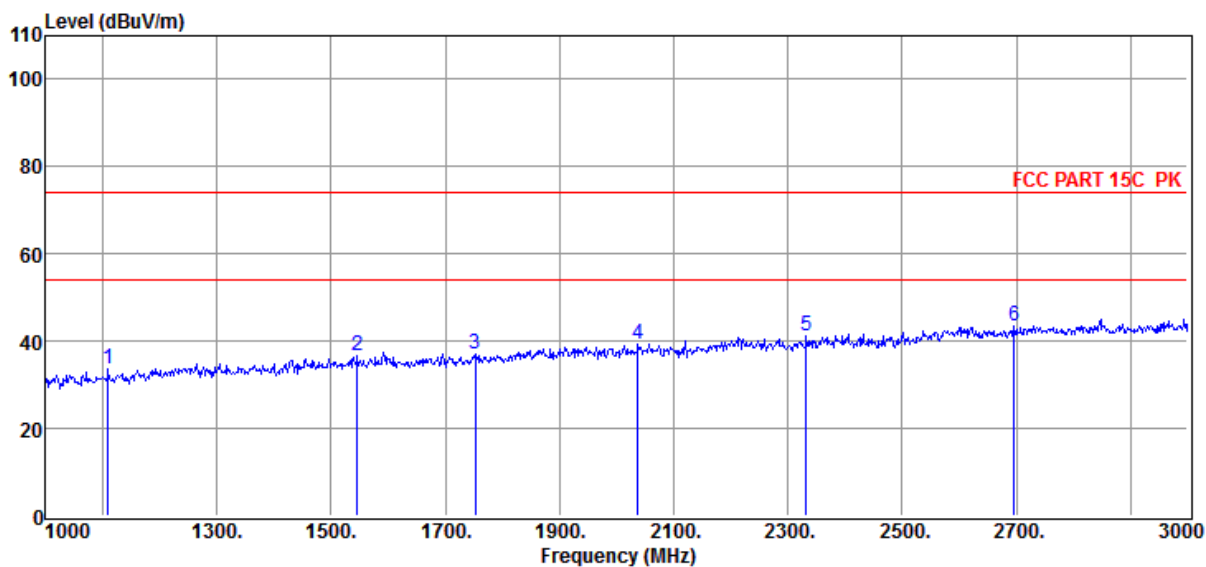

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1110.00	-6.66	33.63	74.00	-40.37	188	306	Peak	HORIZONTAL
2	1546.00	-2.50	36.74	74.00	-37.26	164	360	Peak	HORIZONTAL
3	1752.00	-1.43	37.08	74.00	-36.92	178	13	Peak	HORIZONTAL
4	2038.00	0.93	39.45	74.00	-34.55	150	172	Peak	HORIZONTAL
5	2332.00	2.73	41.02	74.00	-32.98	176	153	Peak	HORIZONTAL
6	2696.00	5.86	43.43	74.00	-30.57	190	327	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC80 MCS0 ANT1+ANT2 5610MHZ

Data: 492

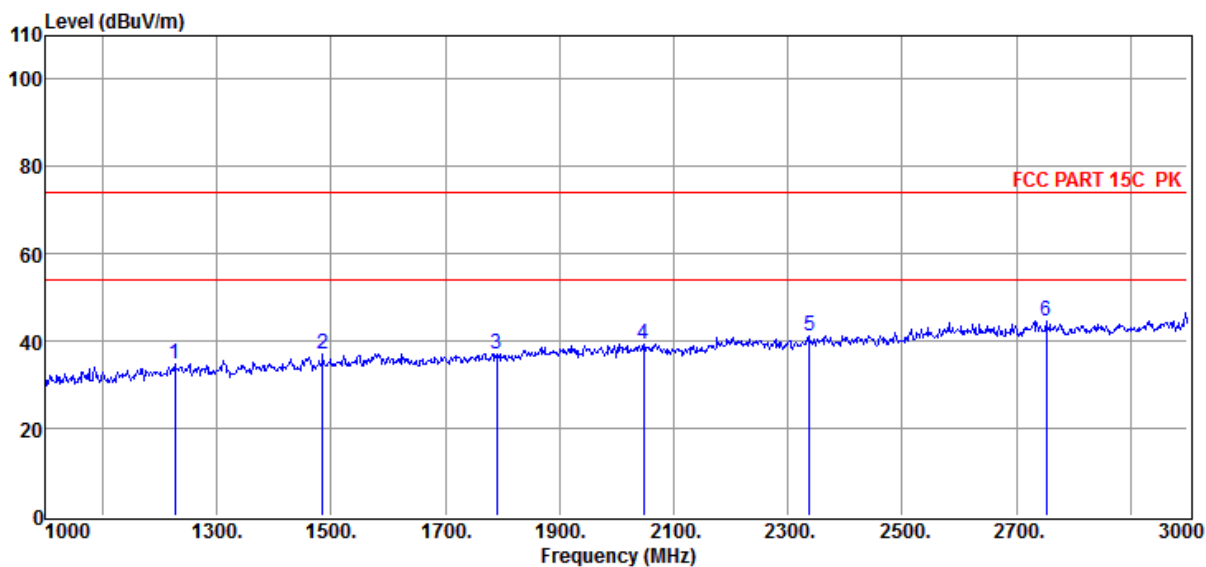

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1226.00	-5.01	34.80	74.00	-39.20	183	165	Peak	HORIZONTAL
2	1486.00	-3.10	36.96	74.00	-37.04	163	343	Peak	HORIZONTAL
3	1790.00	-1.19	37.22	74.00	-36.78	159	301	Peak	HORIZONTAL
4	2048.00	1.12	39.48	74.00	-34.52	154	22	Peak	HORIZONTAL
5	2338.00	2.88	41.29	74.00	-32.71	169	321	Peak	HORIZONTAL
6	2752.00	6.64	44.68	74.00	-29.32	181	171	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11AC80 MCS0 ANT1+ANT2 5610MHZ

Data: 493

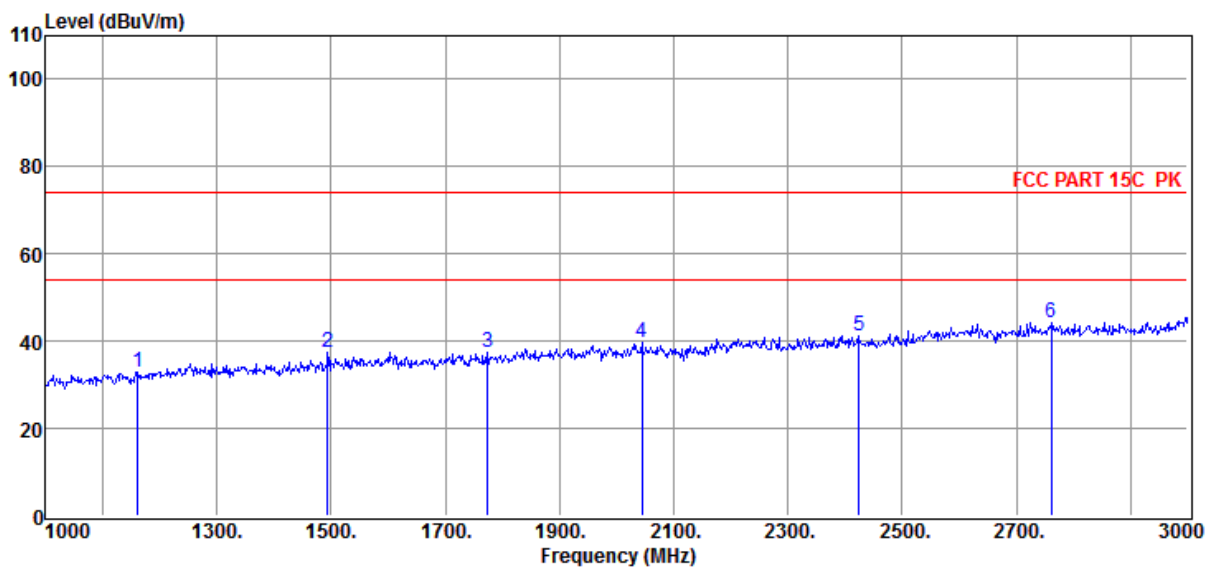

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1162.00	-6.08	32.93	74.00	-41.07	152	257	Peak	VERTICAL
2	1494.00	-3.01	37.54	74.00	-36.46	167	324	Peak	VERTICAL
3	1774.00	-1.30	37.31	74.00	-36.69	177	15	Peak	VERTICAL
4	2044.00	1.05	39.54	74.00	-34.46	186	200	Peak	VERTICAL
5	2424.00	3.31	41.09	74.00	-32.91	153	296	Peak	VERTICAL
6	2762.00	6.59	44.26	74.00	-29.74	187	13	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa Antenna/Distance : 3m/VERTICAL

Memo : 11AC80 MCS0 ANT1+ANT2 5775MHz

Data: 494

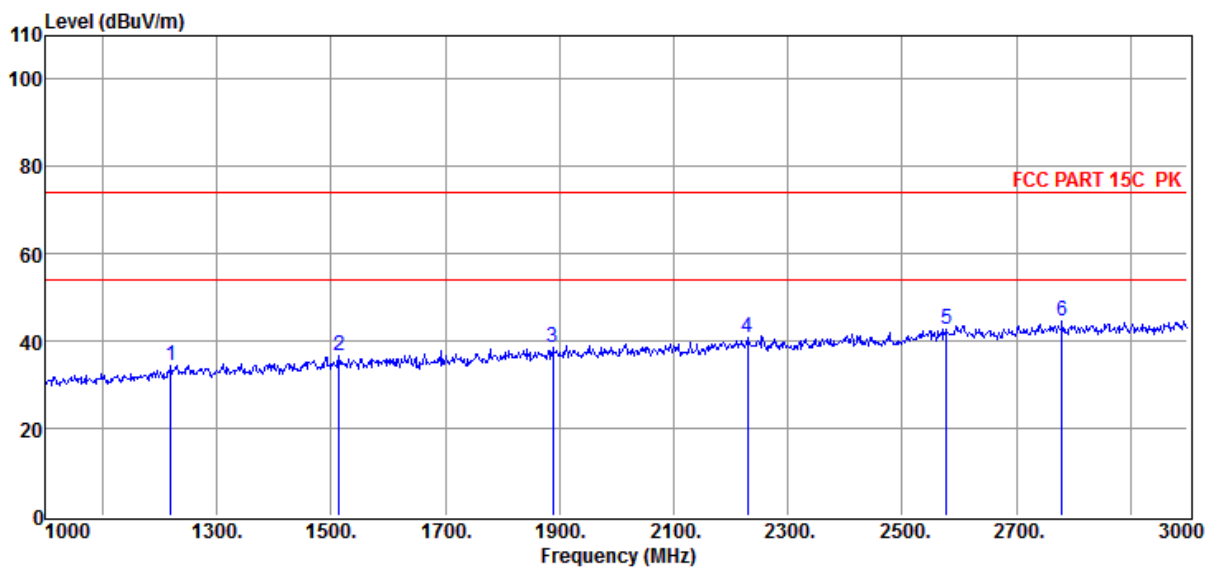

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1220.00	-5.08	34.40	74.00	-39.60	190	267	Peak	VERTICAL
2	1514.00	-2.82	36.66	74.00	-37.34	168	336	Peak	VERTICAL
3	1888.00	-0.14	38.45	74.00	-35.55	163	91	Peak	VERTICAL
4	2230.00	2.37	40.64	74.00	-33.36	161	188	Peak	VERTICAL
5	2578.00	5.42	42.64	74.00	-31.36	183	153	Peak	VERTICAL
6	2780.00	6.49	44.48	74.00	-29.52	158	323	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11AC80 MCS0 ANT1+ANT2 5775MHZ

Data: 495

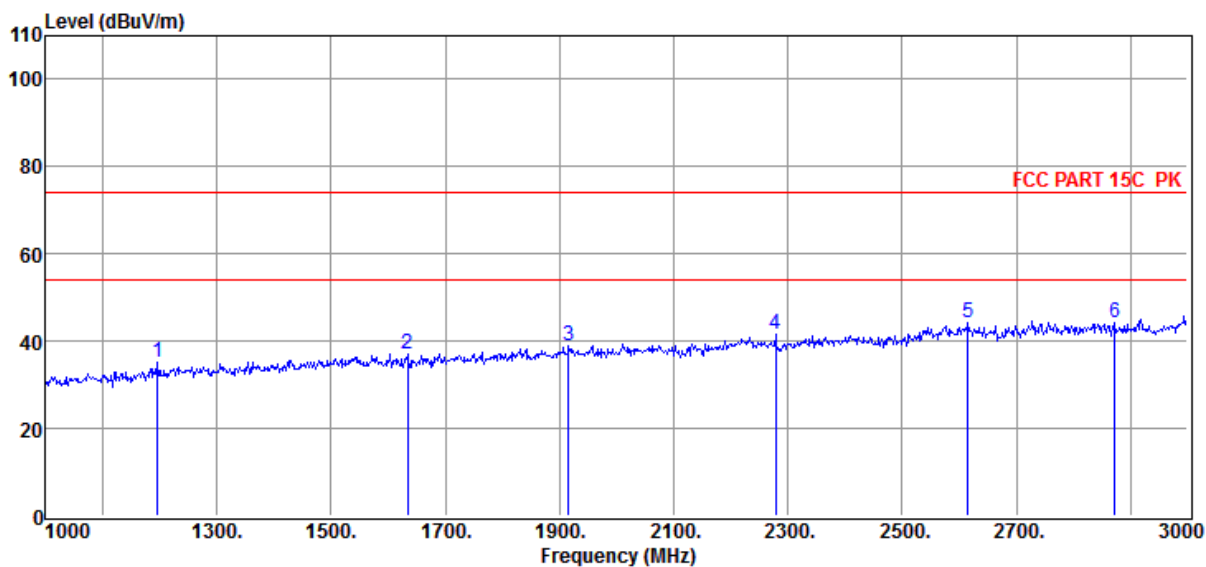

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1196.00	-5.40	35.28	74.00	-38.72	175	2	Peak	HORIZONTAL
2	1634.00	-2.32	37.08	74.00	-36.92	173	75	Peak	HORIZONTAL
3	1916.00	0.05	38.81	74.00	-35.19	170	306	Peak	HORIZONTAL
4	2278.00	2.10	41.71	74.00	-32.29	179	268	Peak	HORIZONTAL
5	2616.00	5.71	44.23	74.00	-29.77	153	173	Peak	HORIZONTAL
6	2872.00	6.83	44.24	74.00	-29.76	188	138	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission test (3 GHz – 18 GHz)

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3'C,Humi:52%,Press:101.6kPa Antenna/Distance : 3m/VERTICAL

Memo : 11A 6M ANT1 5180MHz

Data: 98

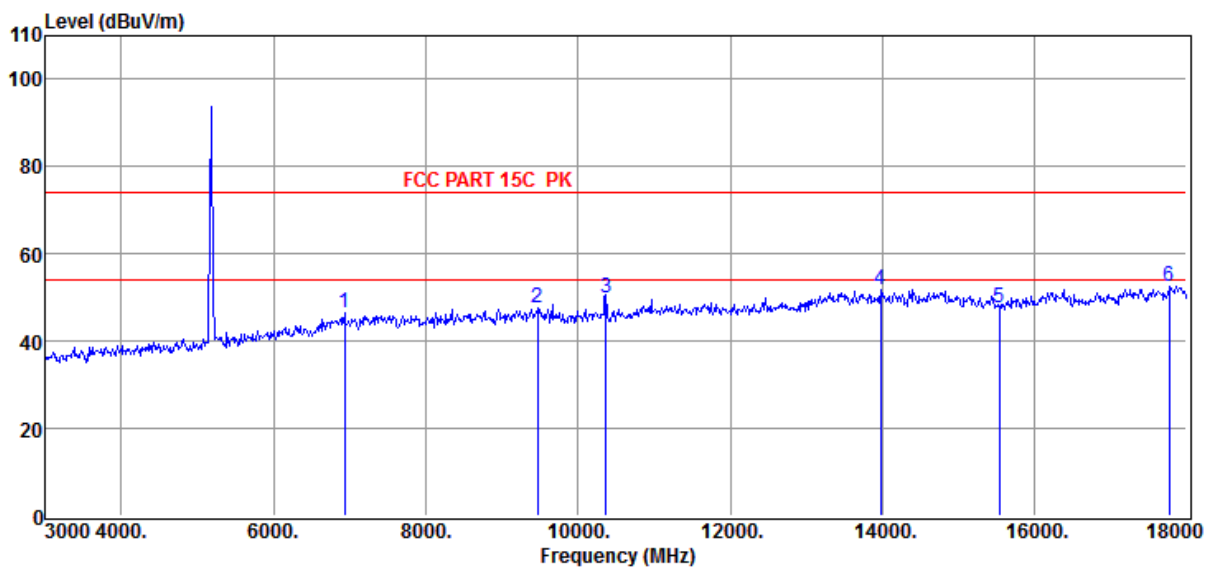

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	6930.00	5.24	46.53	74.00	-27.47	175	171	Peak	VERTICAL
2	9465.00	7.92	47.48	74.00	-26.52	160	172	Peak	VERTICAL
3	10365.00	8.77	49.72	74.00	-24.28	162	328	Peak	VERTICAL
4	13980.00	12.92	51.91	74.00	-22.09	158	142	Peak	VERTICAL
5	15540.00	10.31	47.80	74.00	-26.20	154	35	Peak	VERTICAL
6	17775.00	15.18	52.60	74.00	-21.40	186	265	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5180MHz

Data: 99

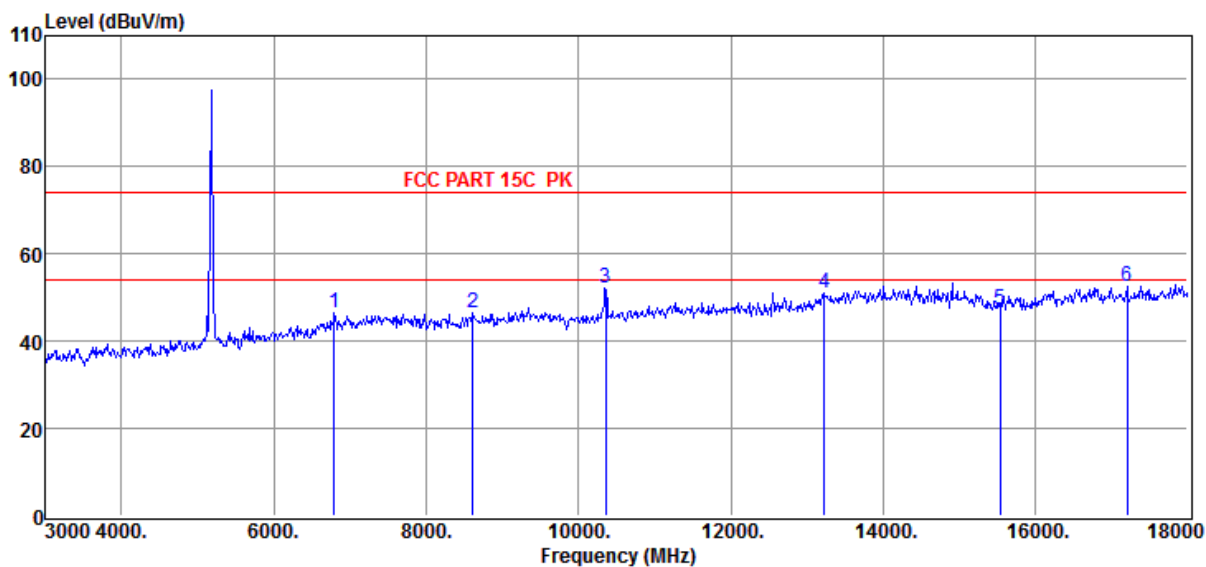

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	6795.00	5.21	46.35	74.00	-27.65	167	105	Peak	HORIZONTAL
2	8610.00	6.50	46.45	74.00	-27.55	179	144	Peak	HORIZONTAL
3	10360.00	8.75	52.02	74.00	-21.98	164	280	Peak	HORIZONTAL
4	13230.00	10.44	50.91	74.00	-23.09	182	7	Peak	HORIZONTAL
5	15540.00	10.31	47.19	74.00	-26.81	190	144	Peak	HORIZONTAL
6	17205.00	15.57	52.60	74.00	-21.40	165	188	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5200MHz

Data: 100

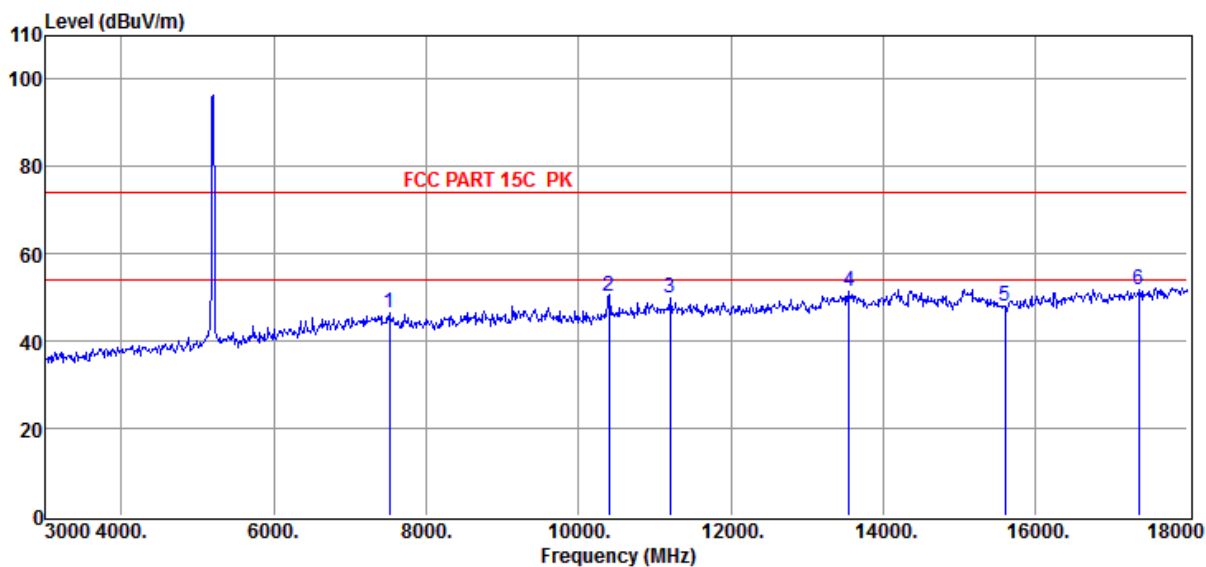

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7515.00	6.54	46.64	74.00	-27.36	151	322	Peak	HORIZONTAL
2	10400.00	8.84	50.18	74.00	-23.82	156	35	Peak	HORIZONTAL
3	11205.00	10.38	49.75	74.00	-24.25	170	284	Peak	HORIZONTAL
4	13560.00	11.41	51.23	74.00	-22.77	156	215	Peak	HORIZONTAL
5	15600.00	10.22	48.08	74.00	-25.92	180	83	Peak	HORIZONTAL
6	17355.00	15.70	51.87	74.00	-22.13	160	141	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5200MHz

Data: 101

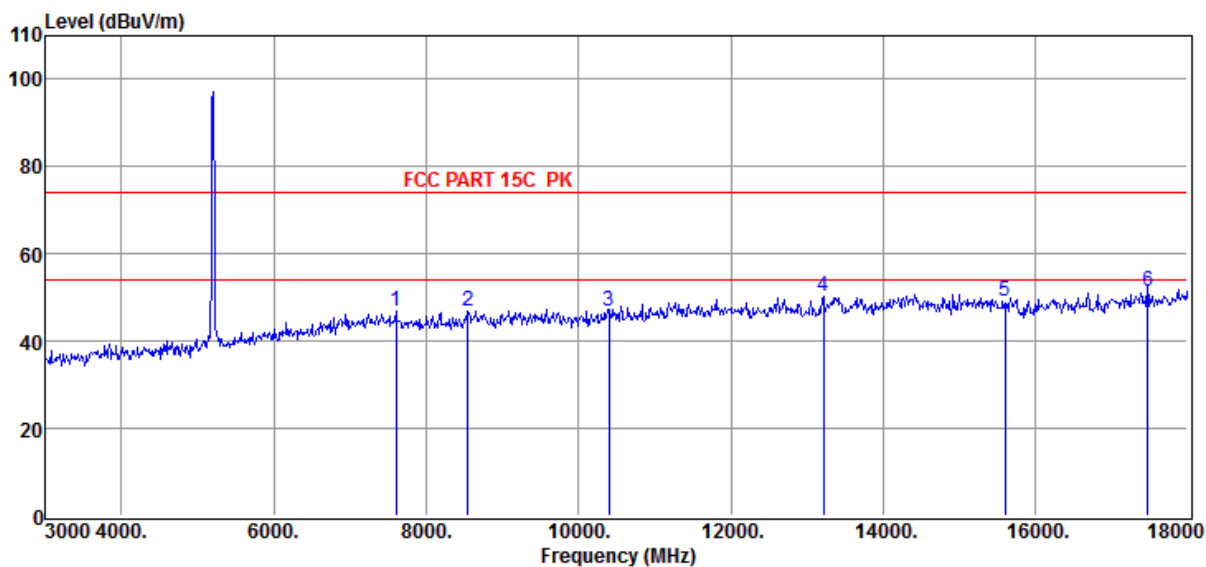

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7605.00	6.32	46.99	74.00	-27.01	179	269	Peak	VERTICAL
2	8550.00	6.47	46.78	74.00	-27.22	151	153	Peak	VERTICAL
3	10400.00	8.84	47.03	74.00	-26.97	171	161	Peak	VERTICAL
4	13215.00	10.35	50.22	74.00	-23.78	166	240	Peak	VERTICAL
5	15600.00	10.22	49.13	74.00	-24.87	164	181	Peak	VERTICAL
6	17475.00	15.60	51.39	74.00	-22.61	173	351	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5240MHz

Data: 102

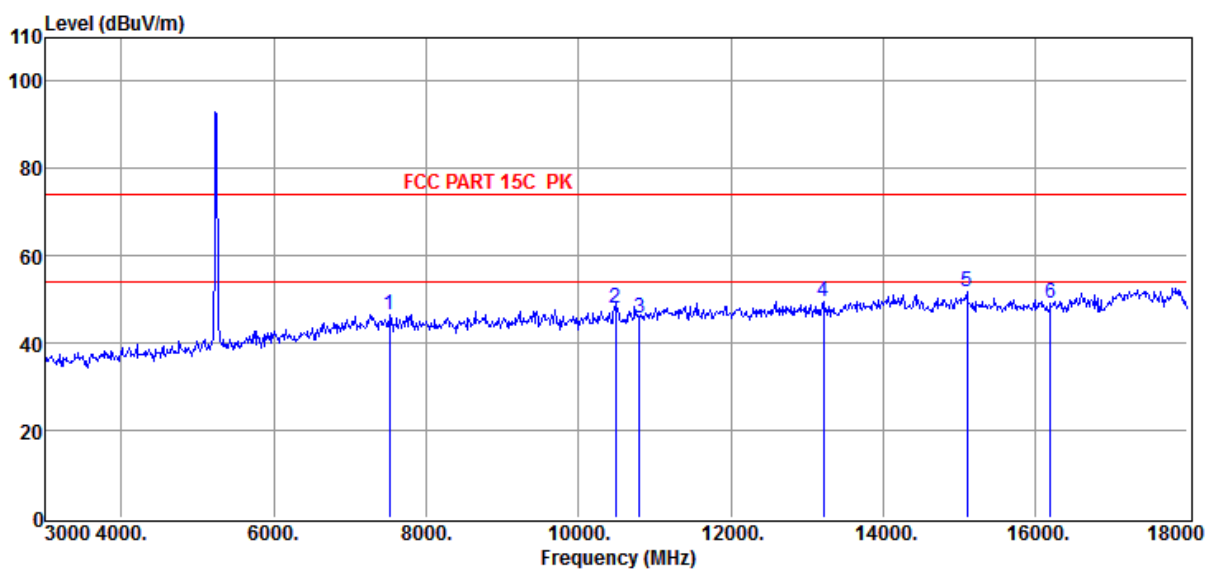

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7515.00	6.54	46.63	74.00	-27.37	168	180	Peak	VERTICAL
2	10485.00	8.91	48.14	74.00	-25.86	185	160	Peak	VERTICAL
3	10800.00	9.65	45.65	74.00	-28.35	182	152	Peak	VERTICAL
4	13215.00	10.35	49.44	74.00	-24.56	189	176	Peak	VERTICAL
5	15105.00	12.31	51.72	74.00	-22.28	190	185	Peak	VERTICAL
6	16200.00	11.23	49.22	74.00	-24.78	180	165	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5240MHz

Data: 103

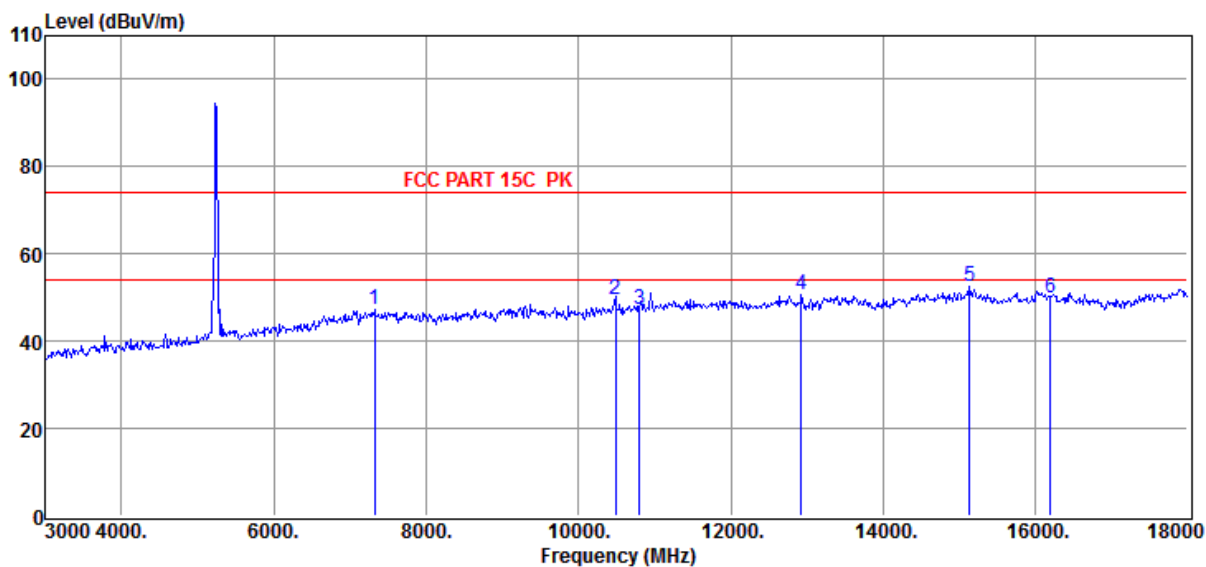

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7320.00	6.39	47.22	74.00	-26.78	163	169	Peak	HORIZONTAL
2	10485.00	8.91	49.40	74.00	-24.60	175	175	Peak	HORIZONTAL
3	10800.00	9.65	47.08	74.00	-26.92	187	181	Peak	HORIZONTAL
4	12930.00	10.04	50.81	74.00	-23.19	182	157	Peak	HORIZONTAL
5	15135.00	11.89	52.56	74.00	-21.44	172	181	Peak	HORIZONTAL
6	16200.00	11.23	49.86	74.00	-24.14	167	183	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5260MHz

Data: 104

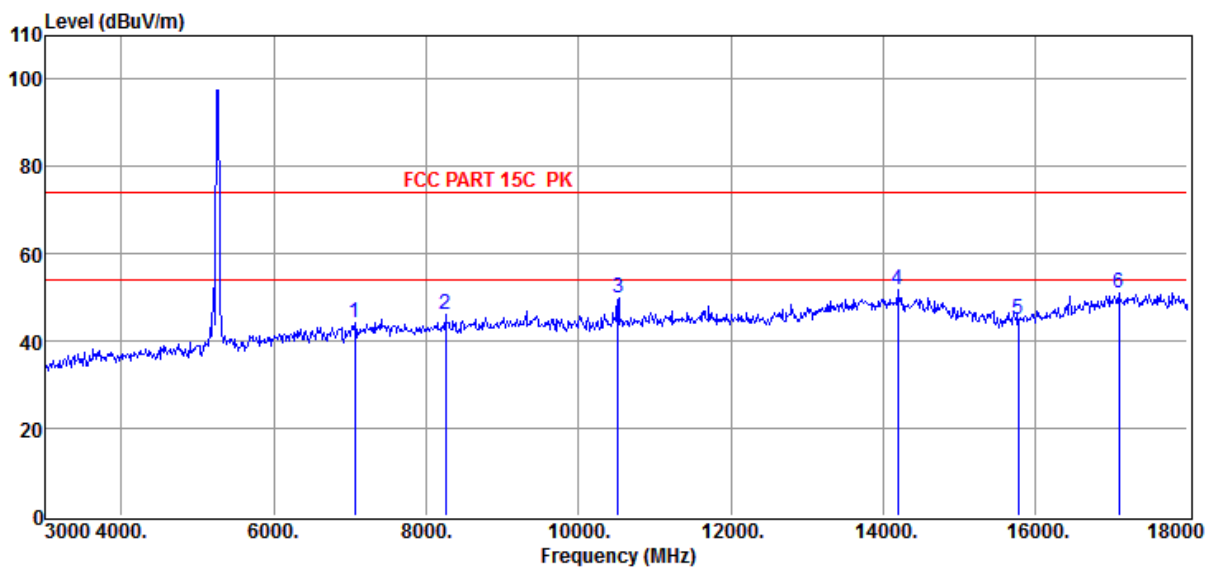

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7065.00	6.04	44.06	74.00	-29.94	156	188	Peak	HORIZONTAL
2	8250.00	6.25	45.98	74.00	-28.02	164	166	Peak	HORIZONTAL
3	10520.00	8.98	49.95	74.00	-24.05	150	189	Peak	HORIZONTAL
4	14190.00	13.97	51.67	74.00	-22.33	181	165	Peak	HORIZONTAL
5	15780.00	10.50	44.94	74.00	-29.06	182	176	Peak	HORIZONTAL
6	17100.00	15.56	50.84	74.00	-23.16	170	172	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5260MHz

Data: 105

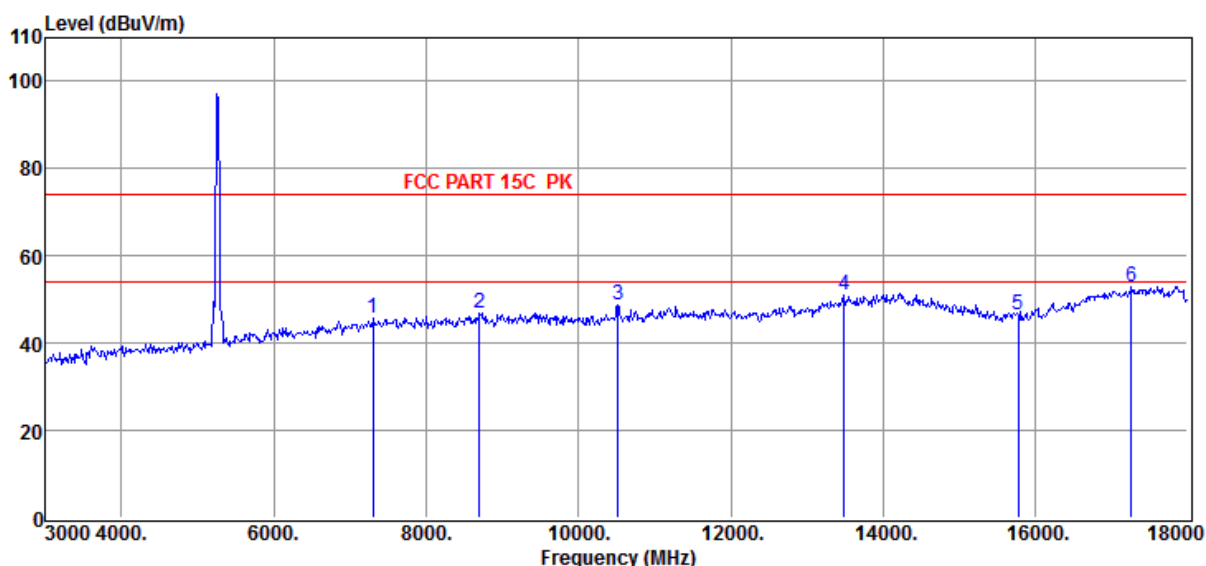

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7305.00	6.30	45.84	74.00	-28.16	176	184	Peak	VERTICAL
2	8700.00	6.65	46.72	74.00	-27.28	156	182	Peak	VERTICAL
3	10520.00	8.98	48.72	74.00	-25.28	170	187	Peak	VERTICAL
4	13485.00	11.25	51.17	74.00	-22.83	186	174	Peak	VERTICAL
5	15780.00	10.50	46.44	74.00	-27.56	168	159	Peak	VERTICAL
6	17265.00	15.73	52.84	74.00	-21.16	151	172	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5280MHz

Data: 106

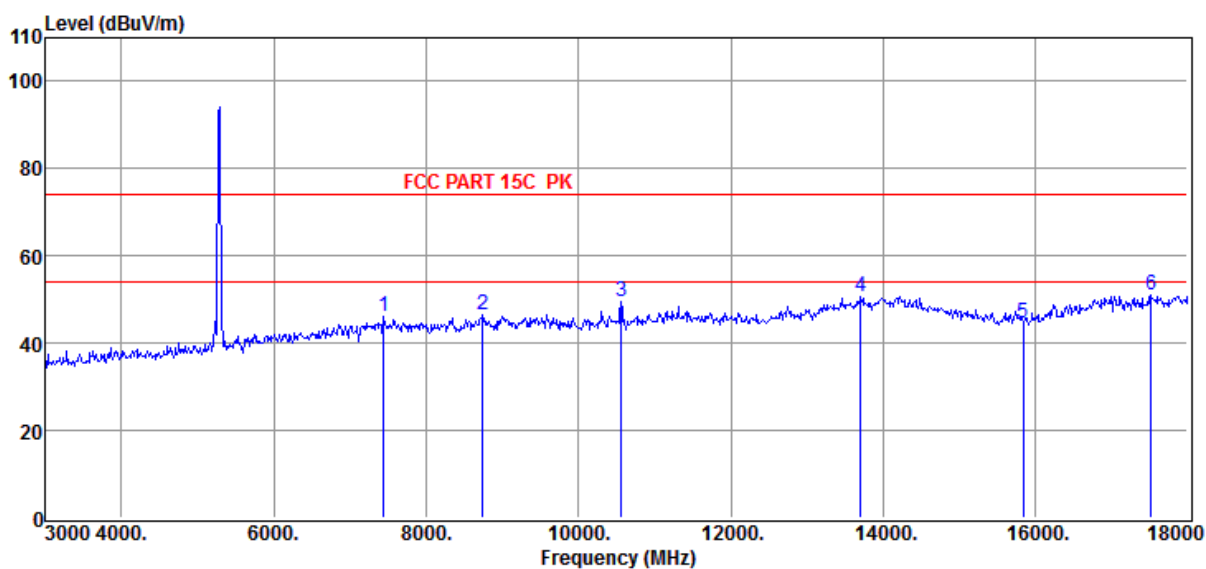

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7440.00	6.43	46.27	74.00	-27.73	161	158	Peak	VERTICAL
2	8745.00	6.67	46.54	74.00	-27.46	165	173	Peak	VERTICAL
3	10560.00	9.06	49.49	74.00	-24.51	170	174	Peak	VERTICAL
4	13710.00	11.91	50.66	74.00	-23.34	160	162	Peak	VERTICAL
5	15840.00	10.49	44.74	74.00	-29.26	175	175	Peak	VERTICAL
6	17520.00	15.56	51.16	74.00	-22.84	189	158	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5280MHz

Data: 107

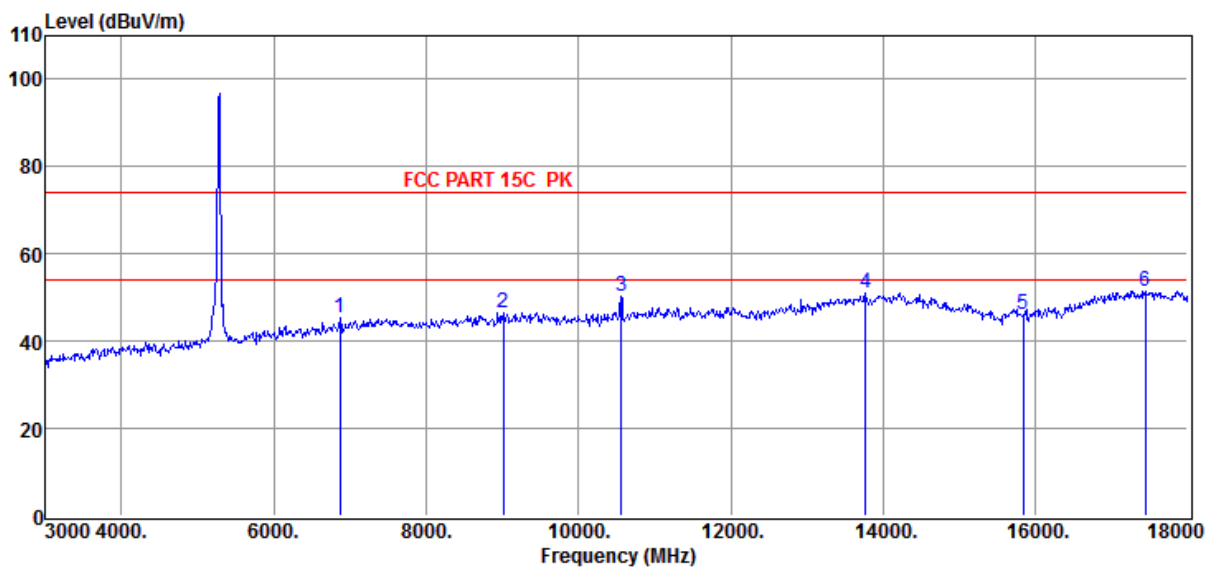

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	6870.00	5.26	45.24	74.00	-28.76	158	168	Peak	HORIZONTAL
2	9015.00	7.16	46.50	74.00	-27.50	174	190	Peak	HORIZONTAL
3	10560.00	9.06	50.37	74.00	-23.63	176	179	Peak	HORIZONTAL
4	13770.00	11.98	50.97	74.00	-23.03	163	166	Peak	HORIZONTAL
5	15840.00	10.49	46.03	74.00	-27.97	178	151	Peak	HORIZONTAL
6	17445.00	15.59	51.55	74.00	-22.45	163	183	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5320MHz

Data: 108

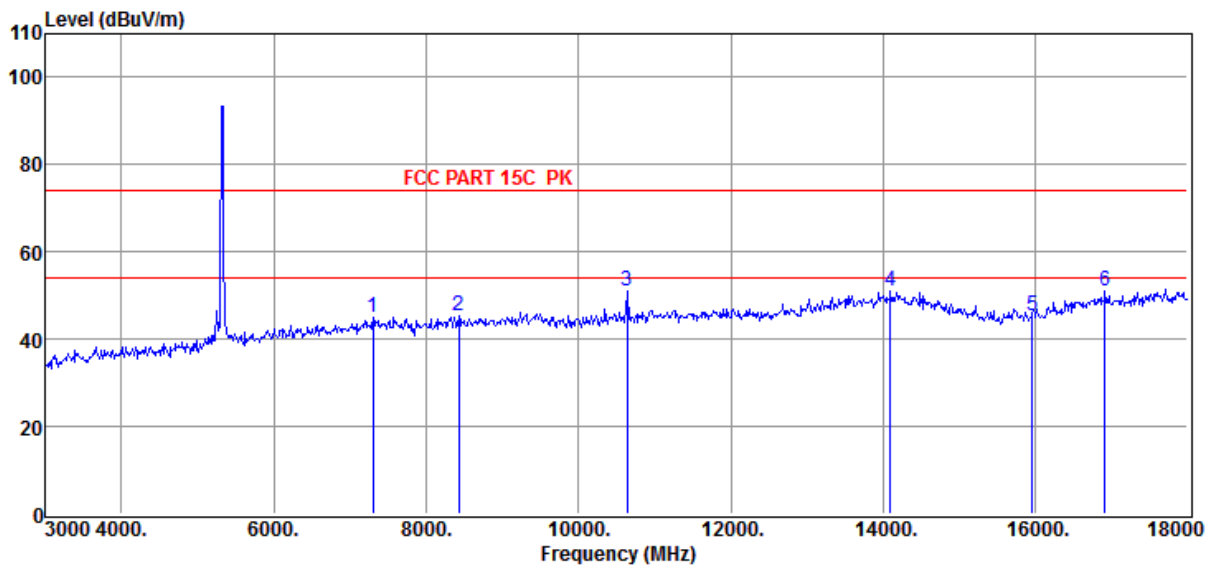

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7305.00	6.30	45.10	74.00	-28.90	173	180	Peak	HORIZONTAL
2	8430.00	6.18	45.37	74.00	-28.63	159	176	Peak	HORIZONTAL
3	10635.00	9.14	51.00	74.00	-23.00	185	159	Peak	HORIZONTAL
4	14100.00	13.07	50.98	74.00	-23.02	180	175	Peak	HORIZONTAL
5	15960.00	10.72	45.51	74.00	-28.49	182	166	Peak	HORIZONTAL
6	16920.00	15.17	51.02	74.00	-22.98	159	152	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5320MHz

Data: 109

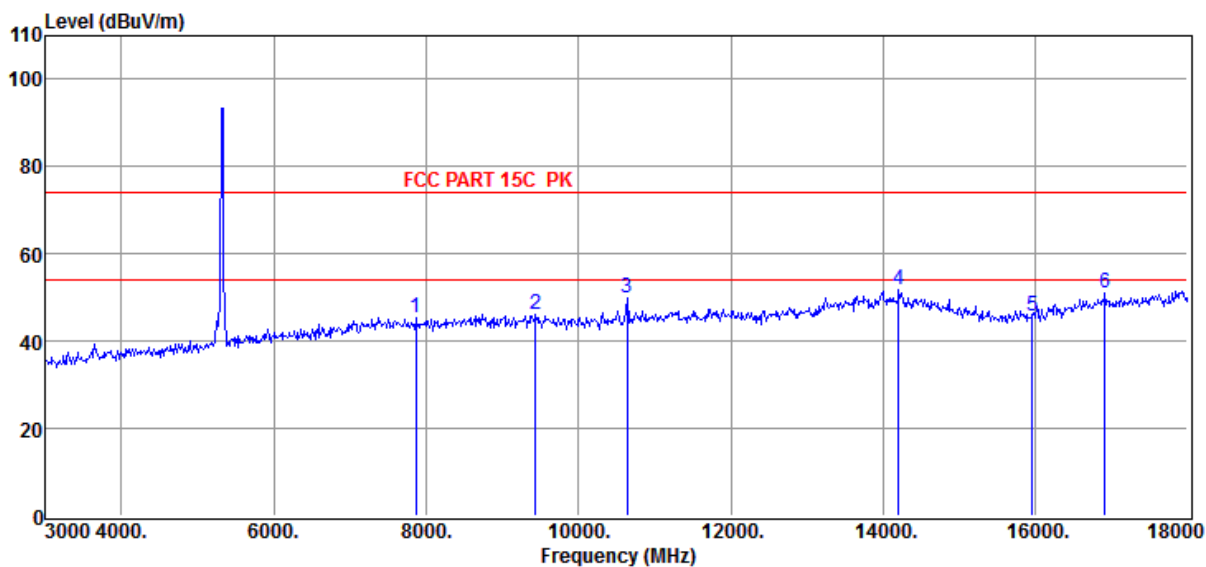

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7860.00	5.71	45.46	74.00	-28.54	154	161	Peak	VERTICAL
2	9435.00	8.05	46.29	74.00	-27.71	167	161	Peak	VERTICAL
3	10640.00	9.14	49.86	74.00	-24.14	151	177	Peak	VERTICAL
4	14205.00	14.01	51.65	74.00	-22.35	156	174	Peak	VERTICAL
5	15960.00	10.72	45.59	74.00	-28.41	182	182	Peak	VERTICAL
6	16920.00	15.17	50.85	74.00	-23.15	186	154	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5500MHZ

Data: 110

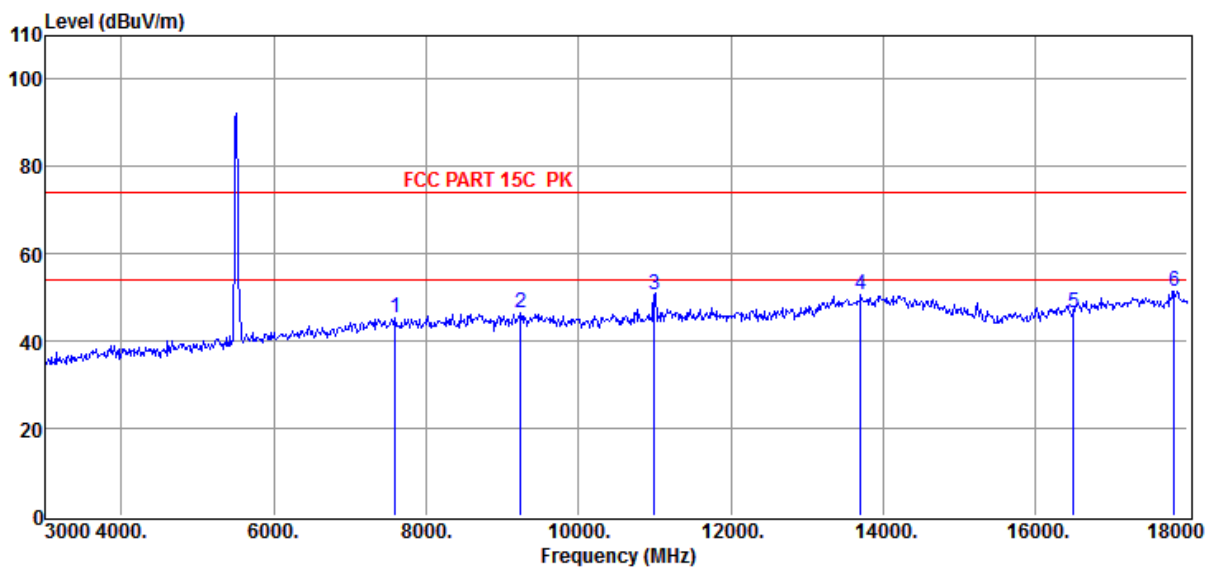

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7590.00	6.43	45.22	74.00	-28.78	182	166	Peak	VERTICAL
2	9240.00	7.43	46.31	74.00	-27.69	150	178	Peak	VERTICAL
3	11000.00	9.85	50.82	74.00	-23.18	161	152	Peak	VERTICAL
4	13710.00	11.91	50.68	74.00	-23.32	159	187	Peak	VERTICAL
5	16500.00	13.06	46.57	74.00	-27.43	179	183	Peak	VERTICAL
6	17820.00	15.29	51.30	74.00	-22.70	159	151	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5500MHZ

Data: 111

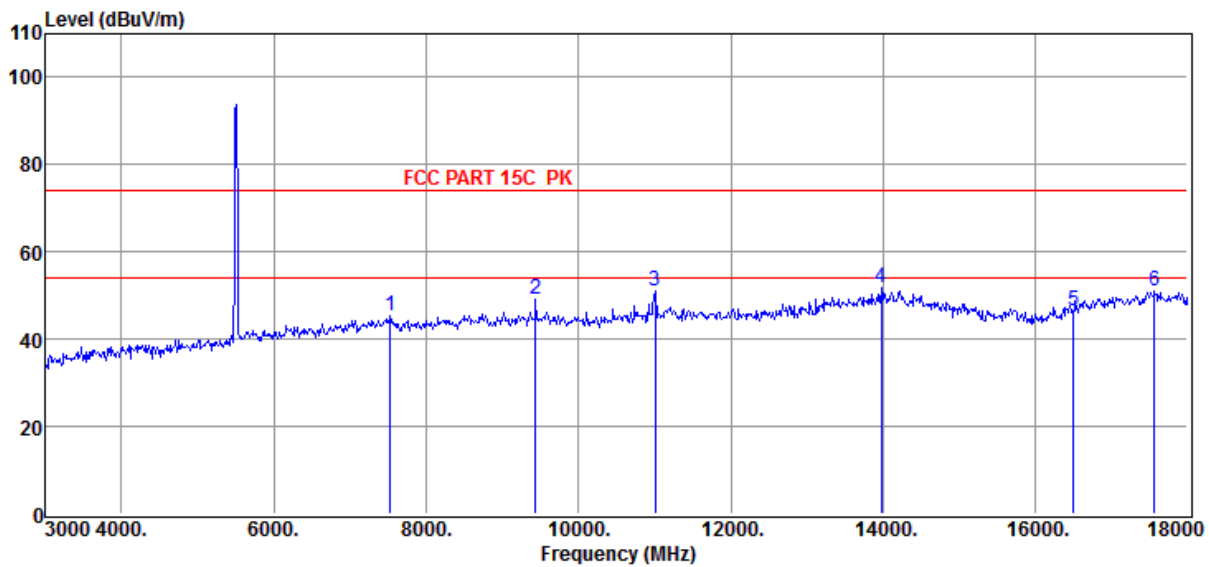

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7530.00	6.59	45.41	74.00	-28.59	185	179	Peak	HORIZONTAL
2	9435.00	8.05	49.18	74.00	-24.82	163	177	Peak	HORIZONTAL
3	11010.00	9.87	50.97	74.00	-23.03	182	171	Peak	HORIZONTAL
4	13980.00	12.92	51.79	74.00	-22.21	180	177	Peak	HORIZONTAL
5	16500.00	13.06	46.50	74.00	-27.50	178	170	Peak	HORIZONTAL
6	17565.00	15.48	50.92	74.00	-23.08	168	152	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5580MHz

Data: 112

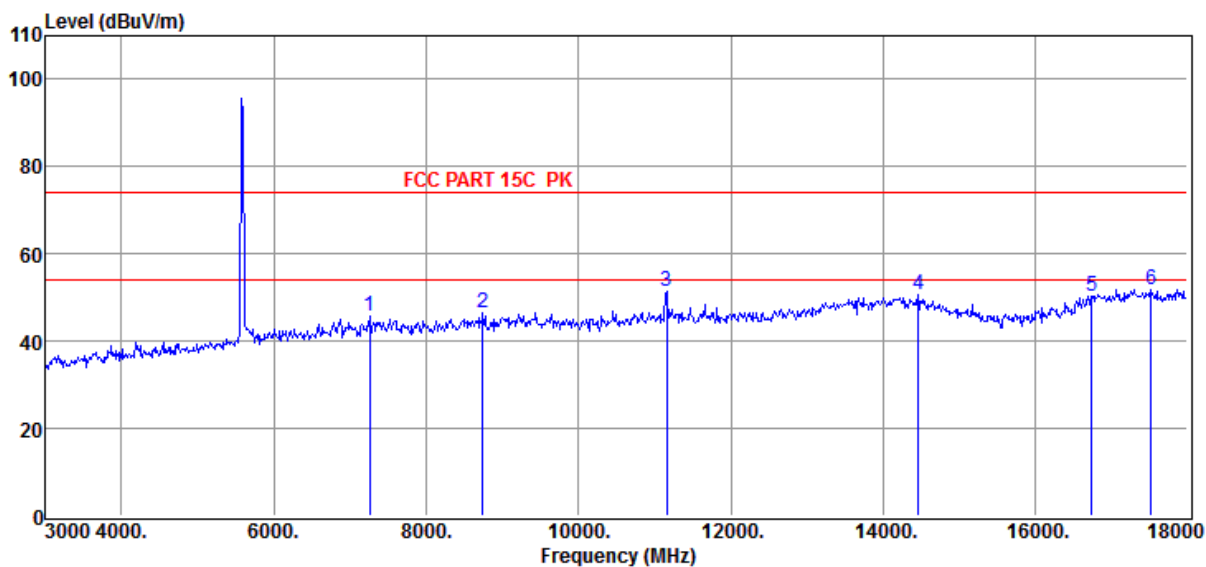

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7260.00	6.39	45.76	74.00	-28.24	150	182	Peak	HORIZONTAL
2	8745.00	6.67	46.47	74.00	-27.53	168	161	Peak	HORIZONTAL
3	11160.00	10.24	51.44	74.00	-22.56	160	170	Peak	HORIZONTAL
4	14460.00	13.24	50.76	74.00	-23.24	190	190	Peak	HORIZONTAL
5	16740.00	14.70	50.27	74.00	-23.73	164	187	Peak	HORIZONTAL
6	17520.00	15.56	51.89	74.00	-22.11	173	189	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5580MHz

Data: 113

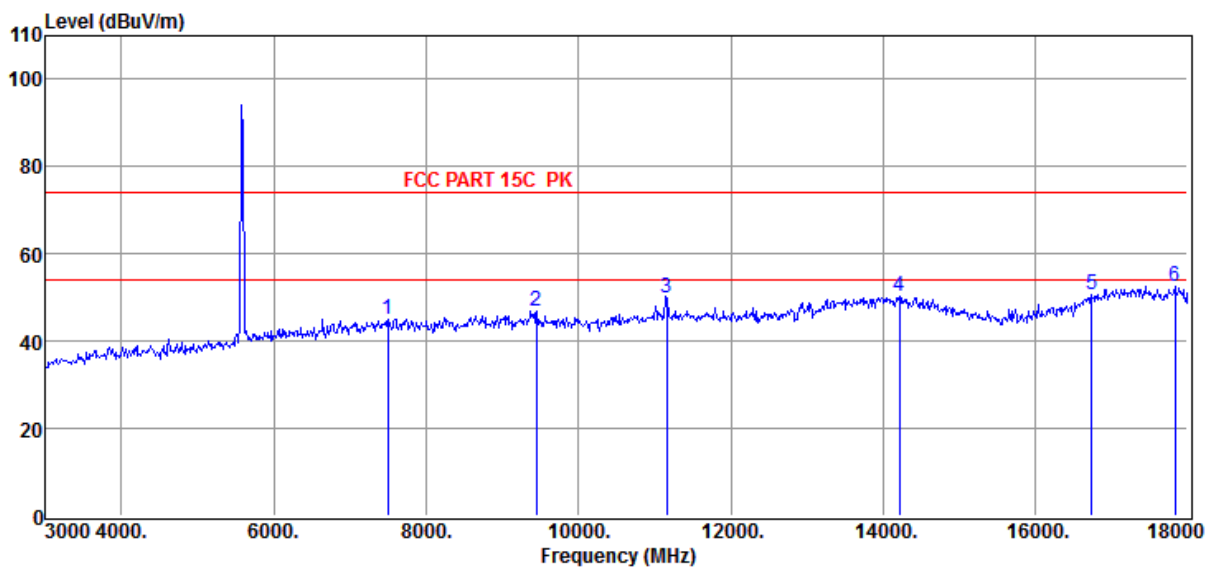

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7500.00	6.50	45.00	74.00	-29.00	190	158	Peak	VERTICAL
2	9450.00	7.98	46.80	74.00	-27.20	177	177	Peak	VERTICAL
3	11160.00	10.24	50.05	74.00	-23.95	178	155	Peak	VERTICAL
4	14220.00	13.82	50.25	74.00	-23.75	177	183	Peak	VERTICAL
5	16740.00	14.70	50.61	74.00	-23.39	188	157	Peak	VERTICAL
6	17835.00	15.29	52.43	74.00	-21.57	174	178	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5700MHz

Data: 114

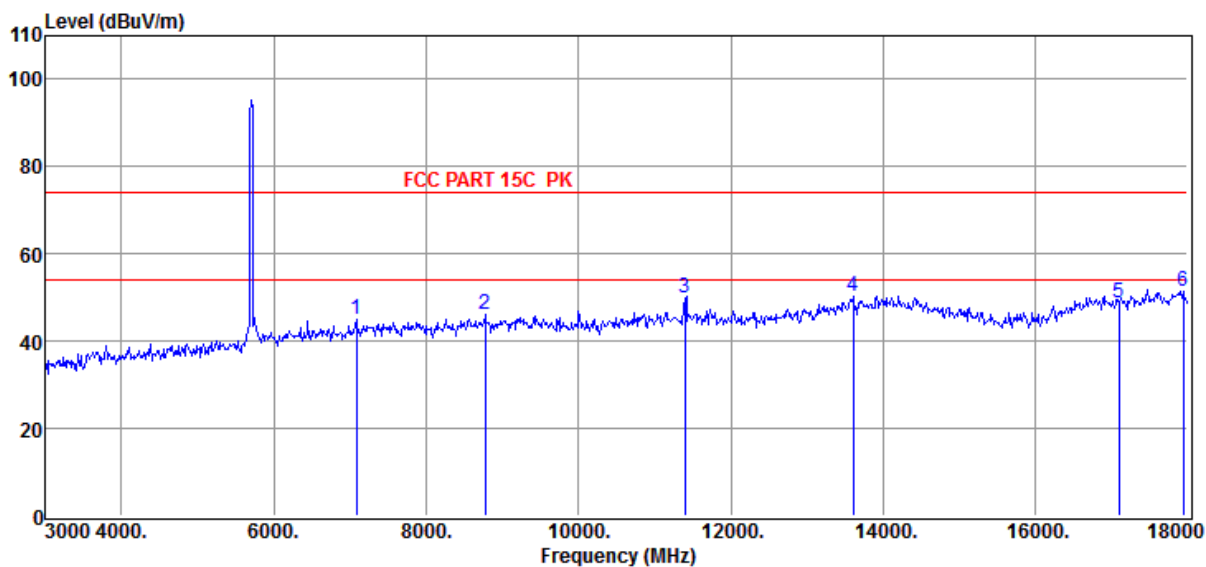

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7080.00	5.89	44.97	74.00	-29.03	170	176	Peak	VERTICAL
2	8775.00	6.68	46.20	74.00	-27.80	151	184	Peak	VERTICAL
3	11400.00	10.06	49.76	74.00	-24.24	165	155	Peak	VERTICAL
4	13605.00	11.48	50.45	74.00	-23.55	168	182	Peak	VERTICAL
5	17100.00	15.56	48.65	74.00	-25.35	155	172	Peak	VERTICAL
6	17940.00	14.95	51.38	74.00	-22.62	186	185	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5700MHz

Data: 115

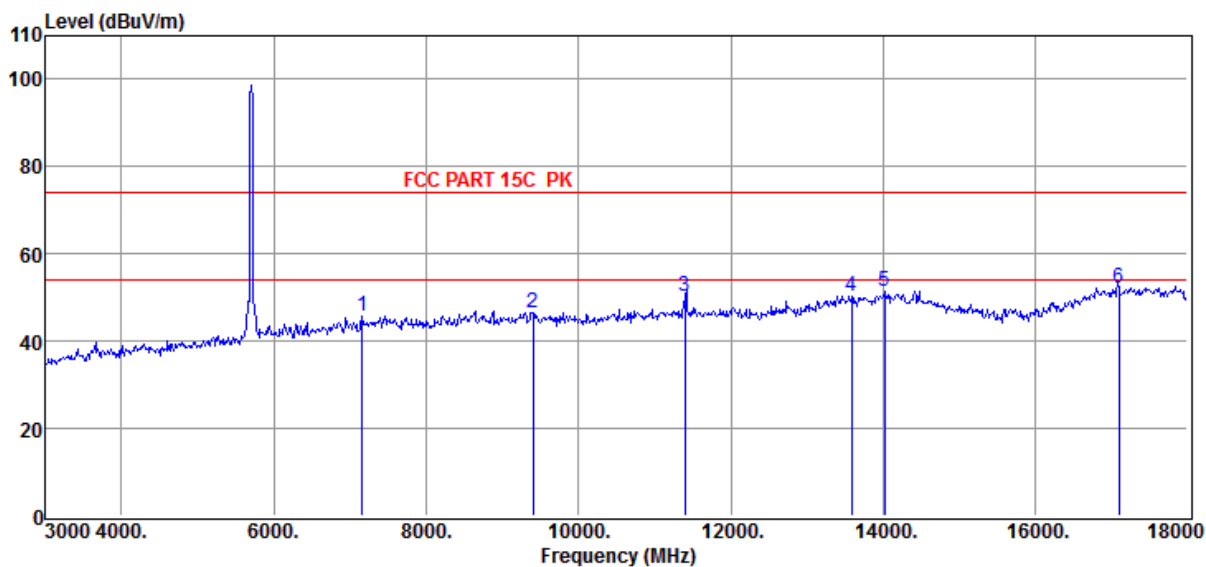

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7155.00	5.78	45.82	74.00	-28.18	150	160	Peak	HORIZONTAL
2	9405.00	8.17	46.66	74.00	-27.34	181	177	Peak	HORIZONTAL
3	11400.00	10.06	50.45	74.00	-23.55	151	189	Peak	HORIZONTAL
4	13590.00	11.45	50.42	74.00	-23.58	170	157	Peak	HORIZONTAL
5	14025.00	13.02	51.56	74.00	-22.44	155	168	Peak	HORIZONTAL
6	17100.00	15.56	52.12	74.00	-21.88	155	157	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5745MHz

Data: 116

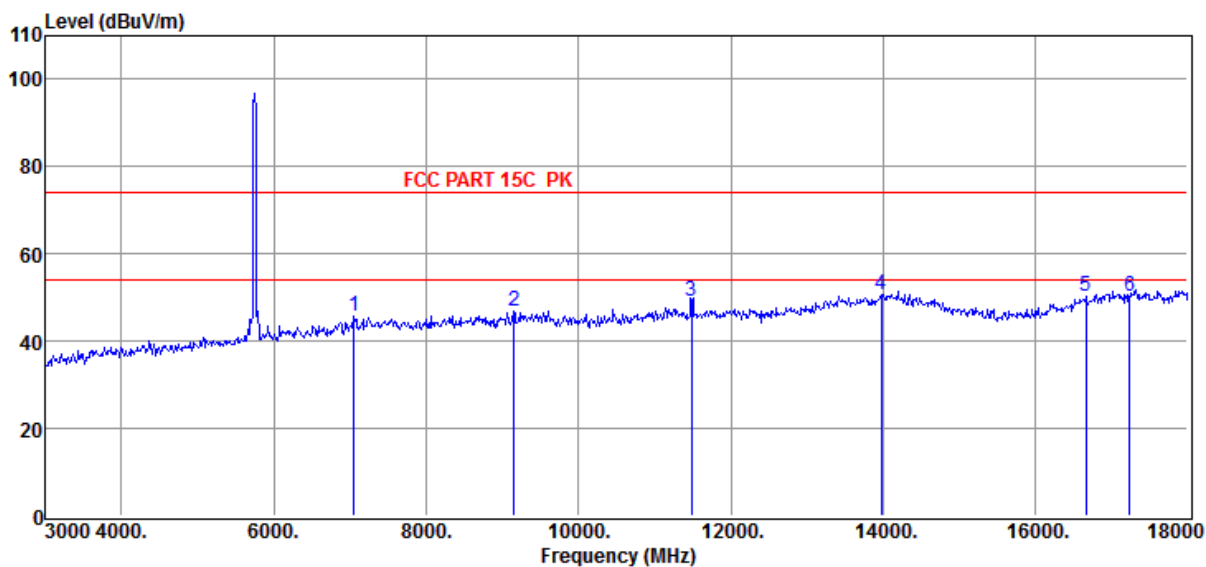

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7050.00	6.21	45.60	74.00	-28.40	181	166	Peak	HORIZONTAL
2	9150.00	7.17	46.97	74.00	-27.03	154	177	Peak	HORIZONTAL
3	11490.00	10.09	49.25	74.00	-24.75	171	184	Peak	HORIZONTAL
4	13980.00	12.92	50.73	74.00	-23.27	175	163	Peak	HORIZONTAL
5	16665.00	14.14	50.34	74.00	-23.66	156	168	Peak	HORIZONTAL
6	17235.00	15.65	50.42	74.00	-23.58	170	175	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5745MHz

Data: 117

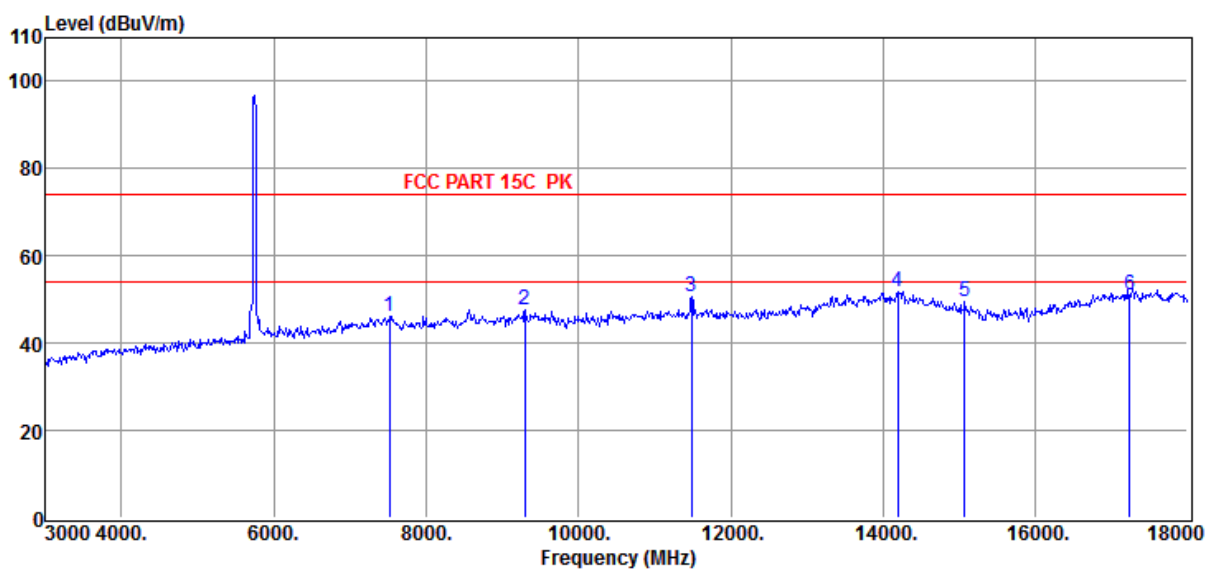

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7515.00	6.54	45.98	74.00	-28.02	165	188	Peak	VERTICAL
2	9300.00	7.67	47.52	74.00	-26.48	184	163	Peak	VERTICAL
3	11490.00	10.09	50.47	74.00	-23.53	156	184	Peak	VERTICAL
4	14190.00	13.97	51.74	74.00	-22.26	176	190	Peak	VERTICAL
5	15075.00	12.18	49.57	74.00	-24.43	160	162	Peak	VERTICAL
6	17235.00	15.65	50.96	74.00	-23.04	174	189	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5785MHz

Data: 118

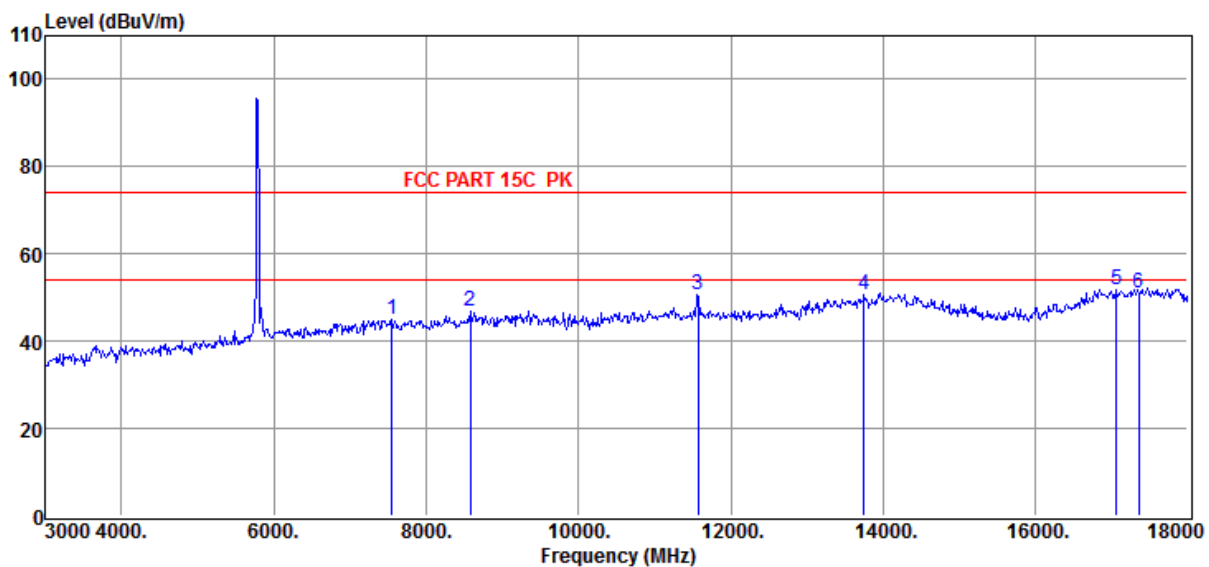

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7545.00	6.62	44.85	74.00	-29.15	172	190	Peak	VERTICAL
2	8580.00	6.48	46.69	74.00	-27.31	175	179	Peak	VERTICAL
3	11570.00	10.07	50.48	74.00	-23.52	182	179	Peak	VERTICAL
4	13755.00	11.96	50.67	74.00	-23.33	155	171	Peak	VERTICAL
5	17070.00	15.79	51.78	74.00	-22.22	183	178	Peak	VERTICAL
6	17355.00	15.70	51.05	74.00	-22.95	164	171	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5785MHz

Data: 119

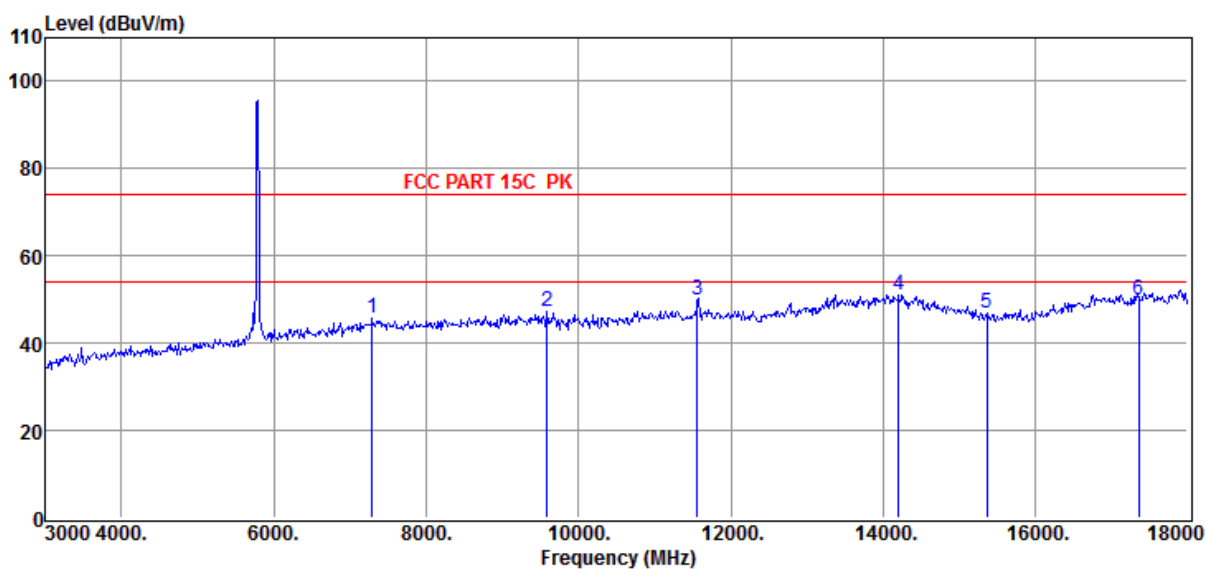

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7290.00	6.29	45.67	74.00	-28.33	163	159	Peak	HORIZONTAL
2	9585.00	8.04	47.21	74.00	-26.79	170	158	Peak	HORIZONTAL
3	11565.00	10.07	50.02	74.00	-23.98	171	168	Peak	HORIZONTAL
4	14205.00	14.01	51.21	74.00	-22.79	156	164	Peak	HORIZONTAL
5	15360.00	10.90	46.84	74.00	-27.16	172	158	Peak	HORIZONTAL
6	17355.00	15.70	50.03	74.00	-23.97	182	171	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT1 5825MHZ

Data: 120

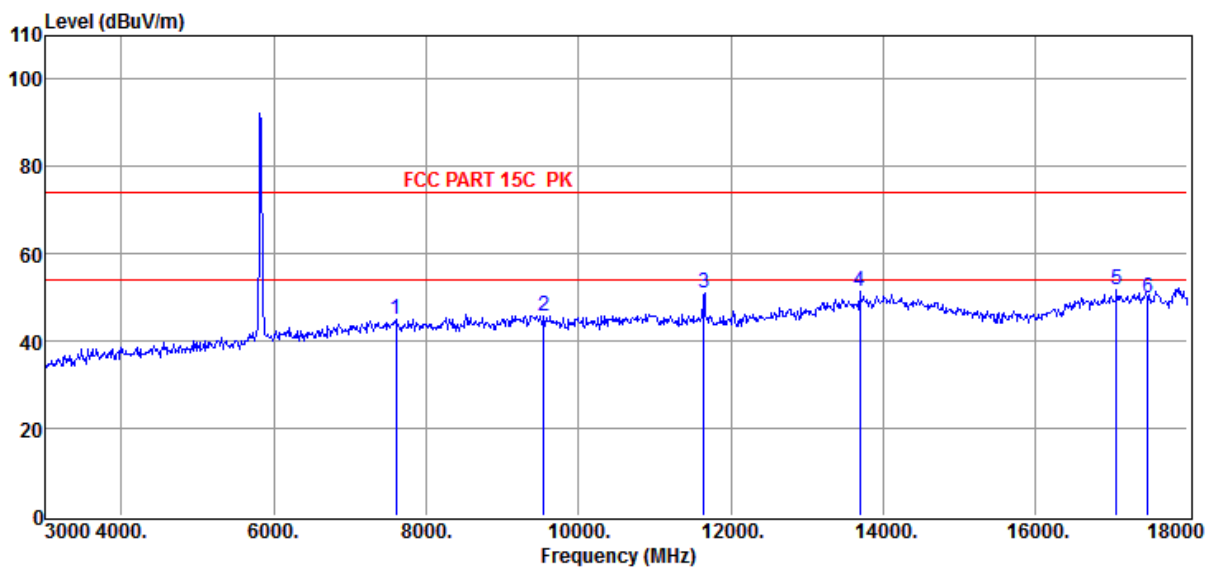

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7605.00	6.32	44.93	74.00	-29.07	153	181	Peak	HORIZONTAL
2	9540.00	7.90	45.84	74.00	-28.16	183	187	Peak	HORIZONTAL
3	11650.00	10.05	51.04	74.00	-22.96	162	154	Peak	HORIZONTAL
4	13695.00	11.88	51.24	74.00	-22.76	168	185	Peak	HORIZONTAL
5	17070.00	15.79	51.86	74.00	-22.14	170	164	Peak	HORIZONTAL
6	17475.00	15.60	49.89	74.00	-24.11	187	170	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11A 6M ANT1 5825MHz

Data: 121

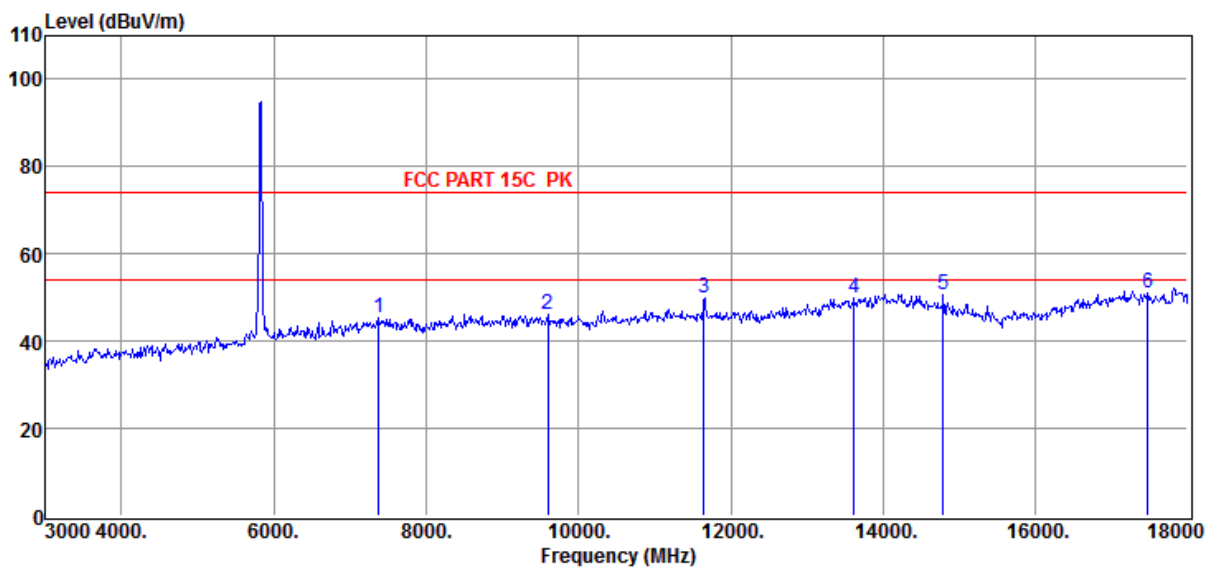

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7380.00	6.30	45.24	74.00	-28.76	154	167	Peak	VERTICAL
2	9600.00	8.09	46.17	74.00	-27.83	180	173	Peak	VERTICAL
3	11650.00	10.05	50.03	74.00	-23.97	168	170	Peak	VERTICAL
4	13620.00	11.55	49.81	74.00	-24.19	190	183	Peak	VERTICAL
5	14790.00	12.88	50.58	74.00	-23.42	168	152	Peak	VERTICAL
6	17475.00	15.60	51.03	74.00	-22.97	175	185	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11A 6M ANT2 5180MHz

Data: 122

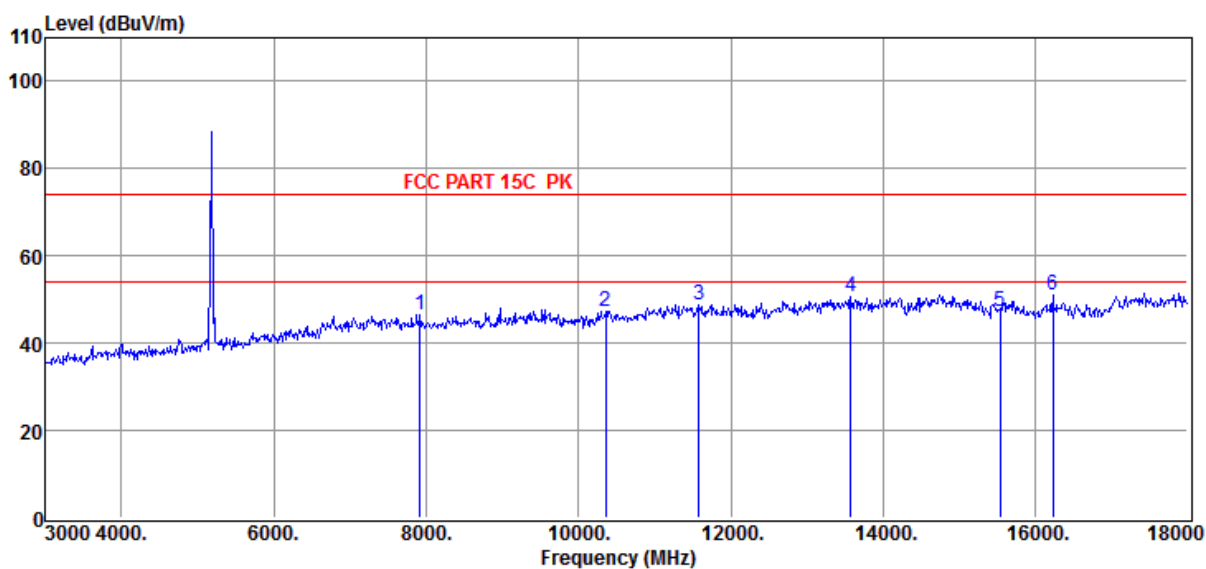

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	7920.00	5.78	46.64	74.00	-27.36	181	179	Peak	HORIZONTAL
2	10360.00	8.75	47.08	74.00	-26.92	165	153	Peak	HORIZONTAL
3	11580.00	10.06	48.69	74.00	-25.31	155	162	Peak	HORIZONTAL
4	13575.00	11.43	50.62	74.00	-23.38	169	158	Peak	HORIZONTAL
5	15540.00	10.31	47.13	74.00	-26.87	176	174	Peak	HORIZONTAL
6	16230.00	11.51	51.02	74.00	-22.98	166	186	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.