

FCC CERTIFICATION TEST REPORT

Report No.: DDT-B21112204-1E04

Applicant	:	Acer Incorporated
Address	:	8F.,NO.88,Sec. 1, Xintai 5 th Rd., Xizhi, New Taipei City 22181, Taiwan (R.O.C)
Equipment under Test	:	Tablet Computer
Model No.	:	A8202
Trade Mark	:	acer
FCC ID	:	HLZA8202
Manufacturer	:	SIM Technology Group Shanghai Simcom Limited
Address	:	Building A,SIM Technology Building NO.633, Jinzhong Road.Changning District ,Shanghai P.R. China

Issued By: Tianjin Dongdian Testing Service Co., Ltd.

Address: Building D-1, No. 19, Weisi Road, Microelectronics Industrial Park Development Area, Tianjin, China.

Tel: +86-22-58038033, E-mail: ddt@dgddi.com, <http://www.ddttest.com>



REPORT

TABLE OF CONTENTS

	Test report declares.....	3
1.	Summary of Test Results.....	5
2.	General Test Information	6
2.1.	Description of EUT	6
2.2.	Accessories of EUT	6
2.3.	Assistant equipment used for test.....	6
2.4.	Block diagram of EUT configuration for test.....	7
2.5.	Deviations of test standard	7
2.6.	Test environment conditions	8
2.7.	Test laboratory	8
2.8.	Measurement uncertainty	9
3.	Equipment Used During Test.....	10
4.	Maximum Conducted Output Power.....	11
4.1.	Re-Test statement.....	11
4.2.	Block diagram of test setup	11
4.3.	Limits	11
4.4.	Test procedure	11
4.5.	Test result.....	12
5.	Radiated Emission	13
5.1.	Block diagram of test setup	13
5.2.	Limit.....	14
5.3.	Test Procedure.....	15
5.4.	Test result.....	17
6.	Band Edge Compliance (Radiated Method).....	92
6.1.	Block diagram of test setup	92
6.2.	Limit.....	92
6.3.	Test Procedure.....	92
6.4.	Test result.....	92
7.	Appendixes	117
8.	Test Setup Photograph	118
8.1.	Test setup of Tianjin Dongdian Testing Service Co., Ltd.....	118
8.2.	Test setup of SGS-CSTC Standards Technical Services,Co.,Ltd.Shenzhen Branch	
	120	

Test Report Declare

Applicant	:	Acer Incorporated
Address	:	8F.,NO.88,Sec. 1, Xintai 5 th Rd., Xizhi, New Taipei City 22181, Taiwan (R.O.C)
Equipment under Test	:	Tablet Computer
Model No.	:	A8202
Trade Mark	:	
Manufacturer	:	SIM Technology Group Shanghai Simcom Limited
Address	:	Building A,SIM Technology Building NO.633, Jinzhong Road.Changning District ,Shanghai P.R. China

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C.

Test Procedure Used:

ANSI C63.10:2013, 558074 D01 15.247 Meas Guidance v05r02

We Declare:

The equipment described above is tested by Tianjin Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Tianjin Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.

Report No.:	DDT-B21112204-1E04		
Date of Receipt:	Nov. 22, 2021	Date of Test:	Nov. 22, 2021 ~ Dec. 09, 2021

Prepared By:

Sunny Zhang

Sunny Zhang/Engineer

Approved By:

Aaron Zhang

Aaron Zhang/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Tianjin Dongdian Testing Service Co., Ltd.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.



Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Dec. 09, 2021	

1. Summary of Test Results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Verdict
6dB Bandwidth and 99% Bandwidth	FCC 15.247 (a) (2) ANSI C63.10:2013	Pass ¹
Maximum Conducted Output Power	FCC 15.247 (b) (3) ANSI C63.10:2013	Pass ²
Power Spectral Density	FCC 15.247 (e) ANSI C63.10:2013	Pass ¹
Band-edge and Spurious Emissions (Conducted)	FCC 15.247 (d) ANSI C63.10:2013	Pass ¹
Radiated Spurious Emissions	FCC 15.247 (d) FCC 15.209 FCC 15.205 ANSI C63.10:2013	Pass ²
Radiated Band Edge Compliance	FCC 15.247 (d) FCC 15.209 FCC 15.205 ANSI C63.10:2013	Pass ²
Power Line Conducted Emission	FCC 15.207 ANSI C63.10:2013	Pass ¹
Note1: The above "pass¹" items data are refer from the original report issued by SGS-CSTC Standards Technical Services Co., Ltd .Shenzhen Branch (Date of Test: 2019/7/3 ~ 2019/7/20), The detailed data can refer to Appendix-2.4GWIFI. Note2: The above "pass²" item is tested by Tianjin Dongdian Testing Service Co., Ltd.		

2. General Test Information

2.1. Description of EUT

EUT* Name	: Tablet Computer
Model Number	: A8202
EUT Function Description	: Please reference user manual of this device
Power Supply	: DC 3.8V Polymer Li-ion built-in battery : DC 5V by AC/DC Adapter
Radio Specification	: IEEE 802.11b/g/n
Operation Frequency	: IEEE 802.11b: 2412MHz-2462MHz : IEEE 802.11g: 2412MHz-2462MHz : IEEE 802.11n HT20: 2412MHz-2462MHz : IEEE 802.11n HT40: 2422MHz-2452MHz
Modulation	: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) : IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) : IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK, BPSK)
Data Rate	: IEEE 802.11b: 1, 2, 5.5, 11 Mbps : IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps : IEEE 802.11n HT20, HT40: MCS8~MCS15
Antenna Type	: Integrated antenna, maximum PK gain: -2.23 dBi
Sample Type	: Portable Device

Note: EUT is the ab. of equipment under test.

Channel information					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/


2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Description	SN
N/A	N/A	N/A	N/A	N/A

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
N/A	N/A	N/A	N/A	N/A

2.4. Block diagram of EUT configuration for test



Test software: QRCT.EXE

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

Tested mode, channel, information			
Mode	Data rate (Mbps) (see Note)	Channel	Frequency (MHz)
IEEE 802.11b	1	CH0	2412
	1	CH6	2437
	1	CH11	2462
IEEE 802.11g	6	CH0	2412
	6	CH6	2437
	6	CH11	2462
IEEE 802.11n HT20	MCS8	CH0	2412
	MCS8	CH6	2437
	MCS8	CH11	2462
IEEE 802.11n HT40	MCS8	CH3	2422
	MCS8	CH6	2437
	MCS8	CH9	2452

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	25-75%
Pressure range:	86-106 kPa

2.7. Test laboratory

Tianjin Dongdian Testing Service Co., Ltd.

Address: Building D-1, No. 19, Weisi Road, Microelectronics Industrial Park Development Area, Tianjin, China.

Tel: +86-22-58038033, <http://www.ddttest.com>, Email: ddt@dgddt.com

NVLAP (National Voluntary Laboratory Accreditation Program) CODE: 500036-0

CNAS (China National Accreditation Service for Conformity Assessment) CODE: L13402

FCC Designation Number: CN5004; FCC Test Firm Registration Number: 368676

ISED (Innovation, Science and Economic Development Canada) Company Number: 27768

Conformity Assessment Body Identifier: CN0125

VCCI Facility Registration Number: C-20089, T-20093, R-20125, G-20122

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	0.14%
Peak Output Power (Conducted) (Spectrum Analyzer)	0.12 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	0.32 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.51 dB
Power Spectral Density	0.12 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	0.32 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method)
	3.4×10^{-8} (Conducted method)
Conducted Spurious Emissions	0.12 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	0.32 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
	0.52 dB ($8 \text{ GHz} \leq f < 22 \text{ GHz}$)
Uncertainty for Radio Frequency (RBW < 20 kHz)	3×10^{-7}
Temperature	$\pm 2^{\circ}\text{C}$
Humidity	$\pm 1\%$
Uncertainty for Radiation Emission Test (30 MHz - 1 GHz)	2.72 dB (Antenna Polarize: V)
	2.72 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission Test (1 GHz - 40 GHz)	2.74 dB (1 - 6 GHz)
	2.72 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power Line Conduction Emission Test	3.40 dB (150 kHz - 30 MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Test


Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
RF Connected Test (MWRFTest system)					
Microwave Signal Generator	R&S	SMF100A	101396	2021/05/25	1 Year
MXG Vector Signal Generator	Agilent	N5182A	MY50143288	2021/03/08	1 Year
EMI Test Receiver	R&S	ESU26	100243	2021/03/03	1 Year
Wideband Radio Communication Tester	R&S	CMW500	158800	2021/05/14	1 Year
Power Detector	MWRFTest	MW100-PS B	MW201203008	2021/03/31	1 Year
DC Power Supply	inSTEK	PSP-2010	EH131319	2021/02/27	1 Year
Test Software	MWRFTest	MTS8310	V03	N/A	N/A
Radiated Emission -10m EMI Chamber					
EXA Signal Analyzer	Keysight	N9010A	MY53281492	2021/03/31	1 Year
Active Loop Antenna	R&S	HFH2-Z2	100269	2021/05/08	1 Year
Double-Ridged Guide Horn Antenna	ETS-LINDGR EN	3115	00102808	2021/03/16	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	2021/04/21	1 Year
Broadband Horn Antenna	TESEQ	BHA 9118	31754	2021/10/12	1 Year
Low noise amplifier	MITEQ	TPA0118-36	0914	2021/02/03	1 Year
EMI Test Receiver	R&S	ESCI	101024	2021/03/03	1 Year
EMI Test Receiver	R&S	ESCI	101030	2021/05/15	1 Year
Bilog Antenna	TESEQ	CBL6112D	29068	2020/10/12	2 Year
Bilog Antenna	TESEQ	CBL6112D	29069	2020/10/12	2 Year
Amplifier	Sonoma	310N	300913	2021/03/03	1 Year
Amplifier	Sonoma	310N	300914	2021/03/03	1 Year
Ant Mast	Innco	MA4000	N/A	N/A	N/A
Ant Mast	Innco	MA4000	N/A	N/A	N/A
Mast Controller	Innco	CO2000	N/A	N/A	N/A
Mast Controller	Innco	CO2000	N/A	N/A	N/A
RF Selector 4CH	TOYO	NS4904N	Selector1	N/A	N/A
RF Selector 4CH	TOYO	NS4904N	Selector2	N/A	N/A
Test software	TOYO	EP5/RSE	Ver 1.9.1	N/A	N/A
Test software	Audix	E3	V 6.11111b	N/A	N/A
Power Line Conducted Emissions Test					
Test Receiver	R&S	ESCI	101397	2021/03/03	1 Year
LISN	R&S	ENV216	101122	2021/03/31	1 Year
Test software	TOYO	EP5/CE	V 5.4.40	N/A	N/A

4. Maximum Conducted Output Power

4.1. Re-Test statement

The EUT is operating at the same power level with the original testing of SGS-CSTC Standards Technical Services, Co., Ltd. Shenzhen Branch.

4.2. Block diagram of test setup



4.3. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.4. Test procedure

Connect each EUT's antenna output to power sensor by RF cable and attenuator.

Measure the PK output power of each antenna port by power sensor.

4.5. Test result

Remark

	The Original Reports	Re-Test Reports
File name:	test report 2.4G WLAN	DDT-B21112204-1E04
Test location:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch	Tianjin Dongdian Testing Service Co., Ltd.


Power

Mode	Test Channel	The Original Reports Level [dBm]			Re-Test Reports Level [dBm]			Power level
		ANT1	ANT2	SUM	ANT1	ANT2	SUM	
802.11b	Lowest	15.35	19.05	---	15.07	18.01	---	14
	Middle	14.92	18.91	---	15.22	19.04	---	14
	Highest	15.14	18.91	---	14.98	18.59	---	14
802.11g	Lowest	17.58	18.90	---	16.89	19.36	---	13
	Middle	17.03	18.72	---	17.03	18.71	---	13
	Highest	17.15	18.90	---	16.59	18.90	---	13
802.11n20_MIMO	Lowest	17.18	15.83	19.57	17.03	15.52	19.35	11
	Middle	16.58	15.53	19.10	15.88	15.71	18.81	11
	Highest	16.87	15.77	19.37	16.16	15.36	18.79	11
802.11n40_MIMO	Lowest	17.59	17.75	20.68	16.92	17.29	20.12	9
	Middle	17.45	17.60	20.54	17.19	17.46	20.34	9
	Highest	17.74	17.45	20.61	16.87	16.99	19.94	9


5. Radiated Emission

5.1. Block diagram of test setup


Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

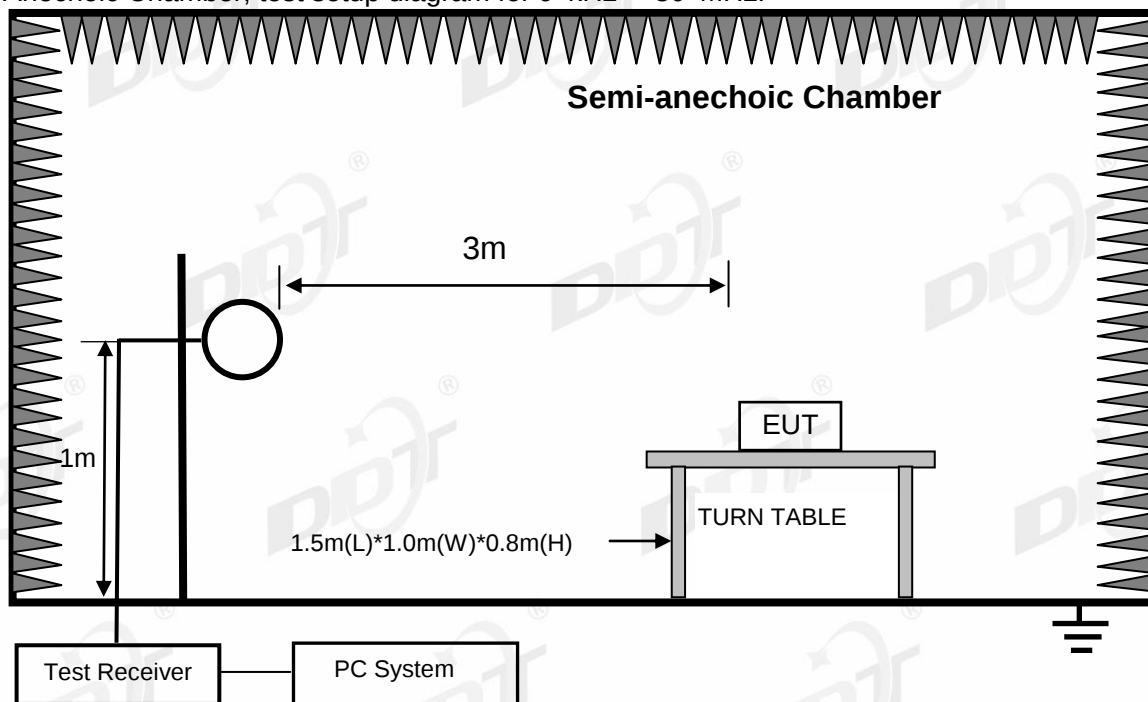

Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

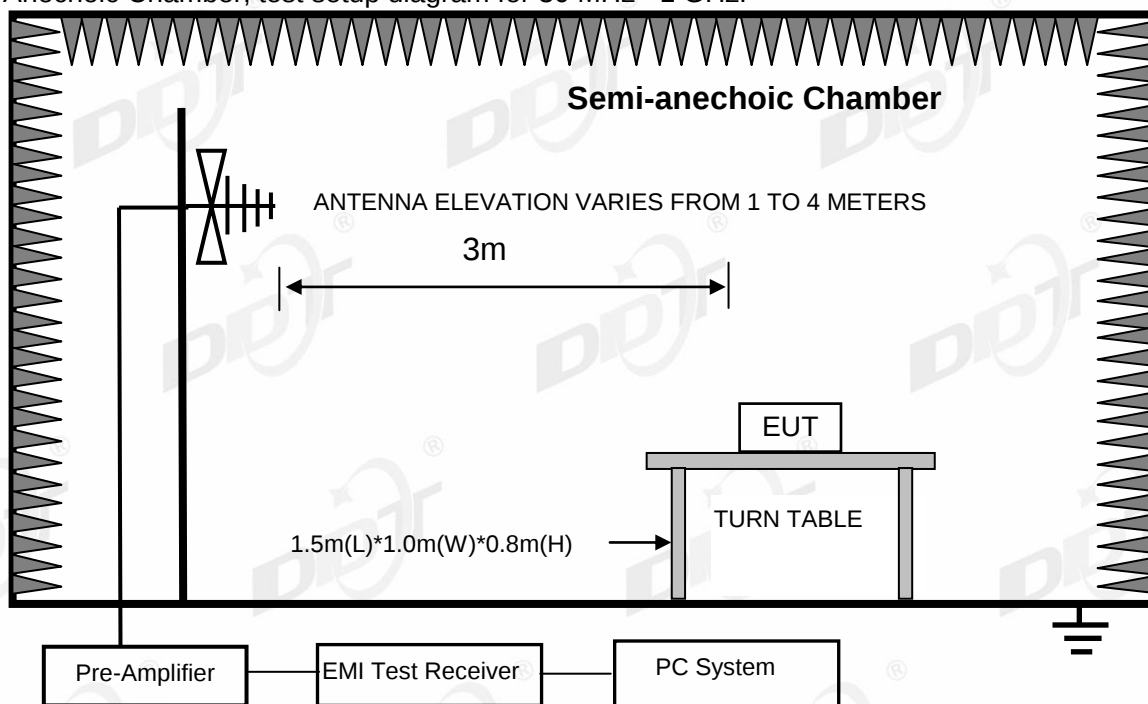

Anechoic Chamber, test setup diagram for frequency above 1 GHz:

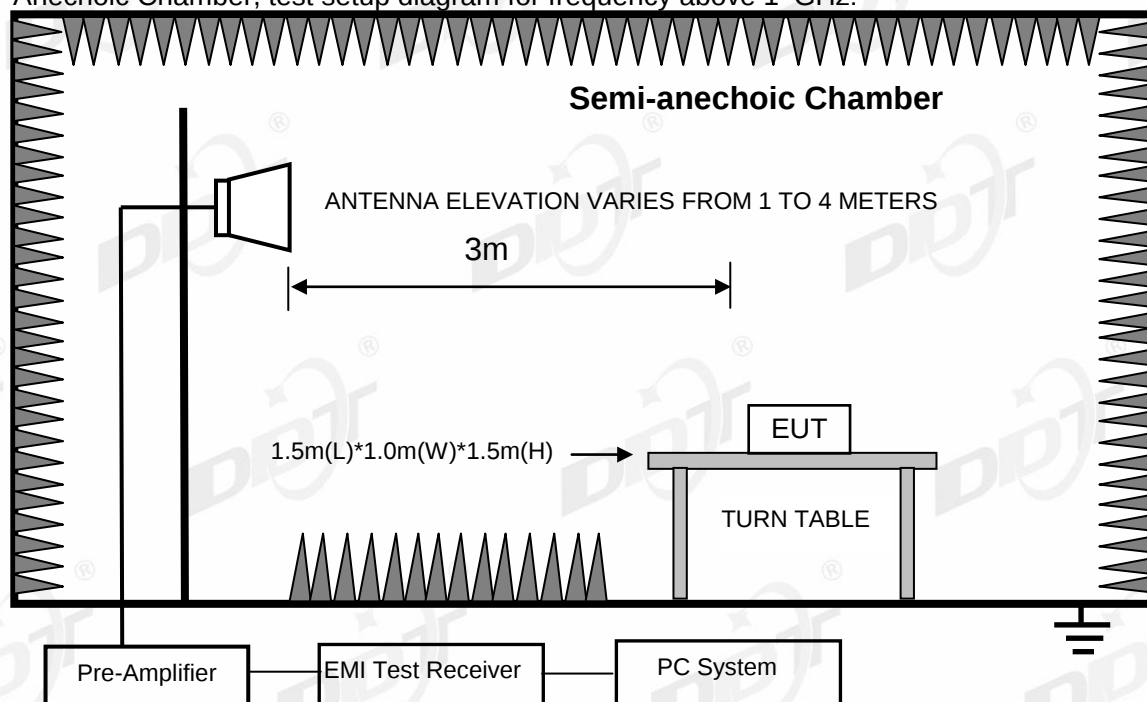

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

5.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

(2) FCC 15.209 Limit.

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(3) Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits.

5.3. Test Procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna (1 GHz - 18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna (18 GHz - 40 GHz)	3 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also

is positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. For measurement above 30 MHz, the trilob Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure.

(8) X axis, Y axis, Z axis are tested, and worse setup X axis is reported.

5.4. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in transmitting and charging mode.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit. Scan with all modes, the worst case was recorded in this report.

Radiated Emission test (below 1 GHz)

Radiated Emission Test Result

Test Site : DDT 10m Chamber

Test Date : 12-03-2021

Tested By : Sunny


EUT : Tablet Computer

Model Number : A8202

Power Supply : AC 120V/60Hz

Test Mode : 2.4G WIFI + Charging

Data: 5

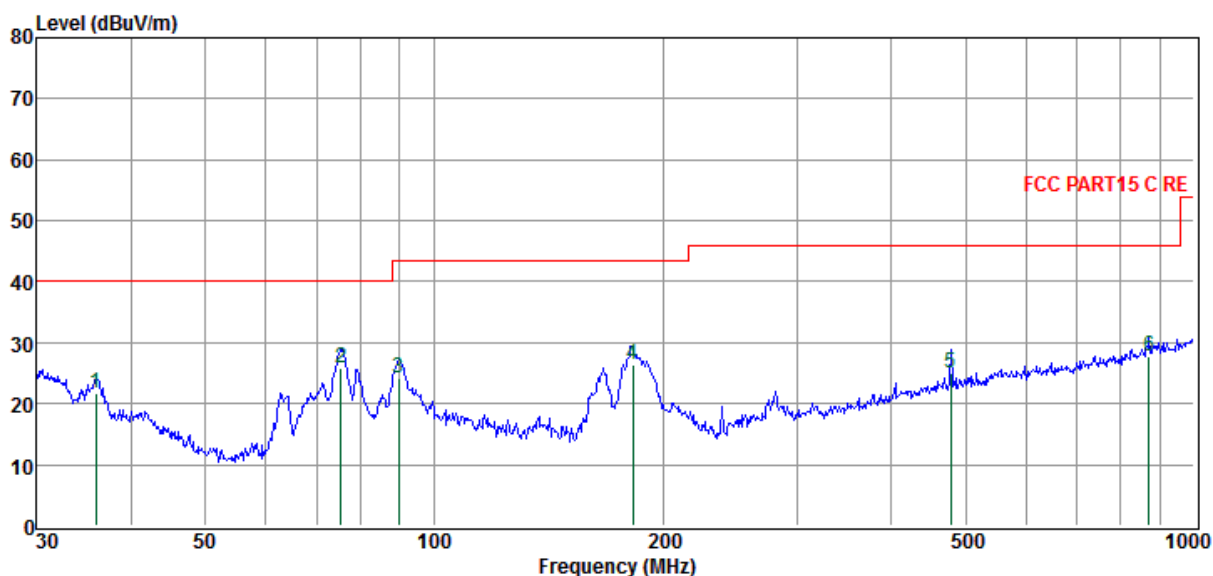

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (°)	Detector	Polarization
1	35.88	30.08	21.70	40.00	-18.30	143	175	QP	HORIZONTAL
2	75.45	42.42	25.94	40.00	-14.06	369	202	QP	HORIZONTAL
3	89.91	38.14	24.12	43.50	-19.38	255	246	QP	HORIZONTAL
4	182.56	38.64	26.41	43.50	-17.09	385	80	QP	HORIZONTAL
5	478.85	26.24	24.99	46.00	-21.01	274	132	QP	HORIZONTAL
6	872.18	22.29	27.79	46.00	-18.21	136	25	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. Margin QP (Quasi-Peak) = Level QP - Limit

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission Test Result

Test Site : DDT 10m Chamber

Test Date : 12-03-2021

Tested By : Sunny


EUT : Tablet Computer

Model Number : A8202

Power Supply : AC 120V/60Hz

Test Mode : 2.4G WIFI + Charging

Data: 6

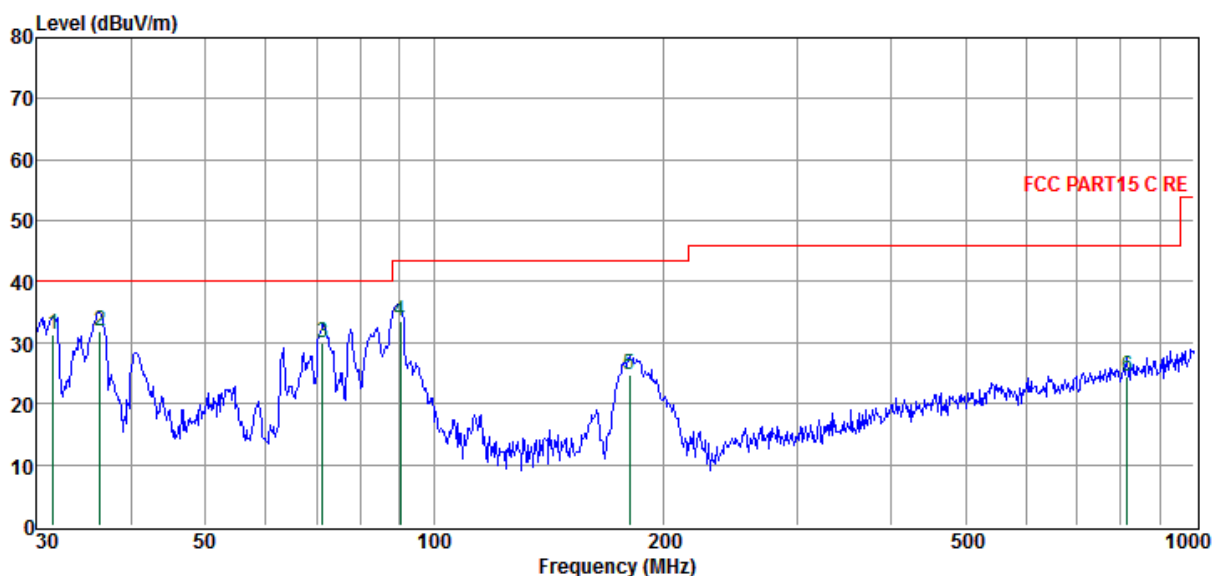

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (°)	Detector	Polarization
1	31.51	36.97	31.20	40.00	-8.80	275	302	QP	VERTICAL
2	36.38	40.57	31.95	40.00	-8.05	380	129	QP	VERTICAL
3	71.33	46.74	30.01	40.00	-9.99	114	81	QP	VERTICAL
4	90.22	47.38	33.43	43.50	-10.07	191	343	QP	VERTICAL
5	180.65	36.93	24.72	43.50	-18.78	154	161	QP	VERTICAL
6	815.97	20.58	24.56	46.00	-21.44	154	59	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. Margin QP (Quasi-Peak) = Level QP - Limit

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (1 GHz – 3 GHz)

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa Antenna/Distance : 3m/VERTICAL

Memo : 11B 1M ANT1 2412MHz

Data: 318

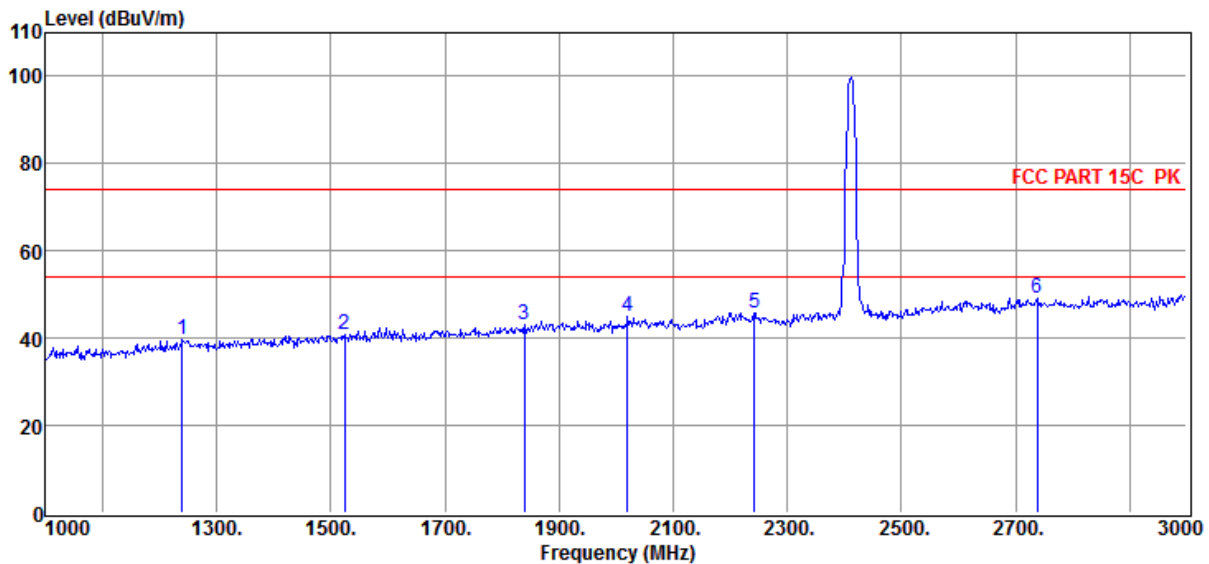

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1240.00	-4.84	39.74	74.00	-34.26	175	2	Peak	VERTICAL
2	1524.00	-2.72	40.69	74.00	-33.31	173	75	Peak	VERTICAL
3	1840.00	-0.49	43.03	74.00	-30.97	170	306	Peak	VERTICAL
4	2020.00	0.60	44.93	74.00	-29.07	179	268	Peak	VERTICAL
5	2242.00	2.37	45.88	74.00	-28.12	153	173	Peak	VERTICAL
6	2738.00	6.48	49.27	74.00	-24.73	188	138	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11B 1M ANT1 2412MHz

Data: 319

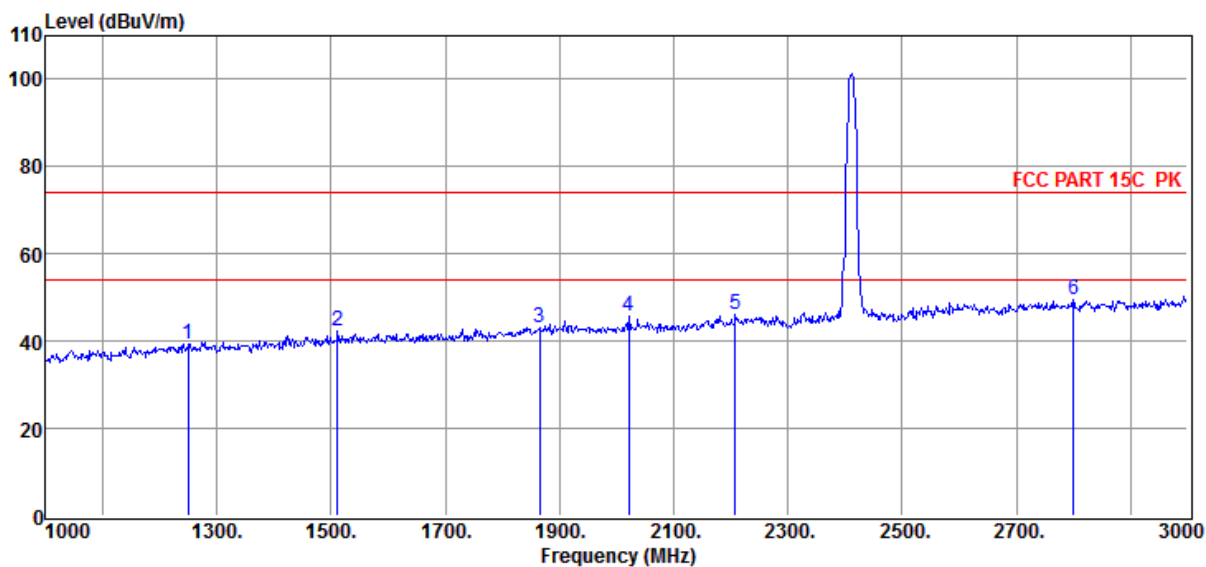

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1250.00	-4.72	39.44	74.00	-34.56	170	357	Peak	HORIZONTAL
2	1512.00	-2.83	42.36	74.00	-31.64	161	358	Peak	HORIZONTAL
3	1866.00	-0.24	43.18	74.00	-30.82	179	200	Peak	HORIZONTAL
4	2022.00	0.64	45.89	74.00	-28.11	174	319	Peak	HORIZONTAL
5	2208.00	2.37	46.24	74.00	-27.76	150	200	Peak	HORIZONTAL
6	2800.00	6.38	49.51	74.00	-24.49	189	64	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11B 1M ANT1 2437MHz

Data: 320

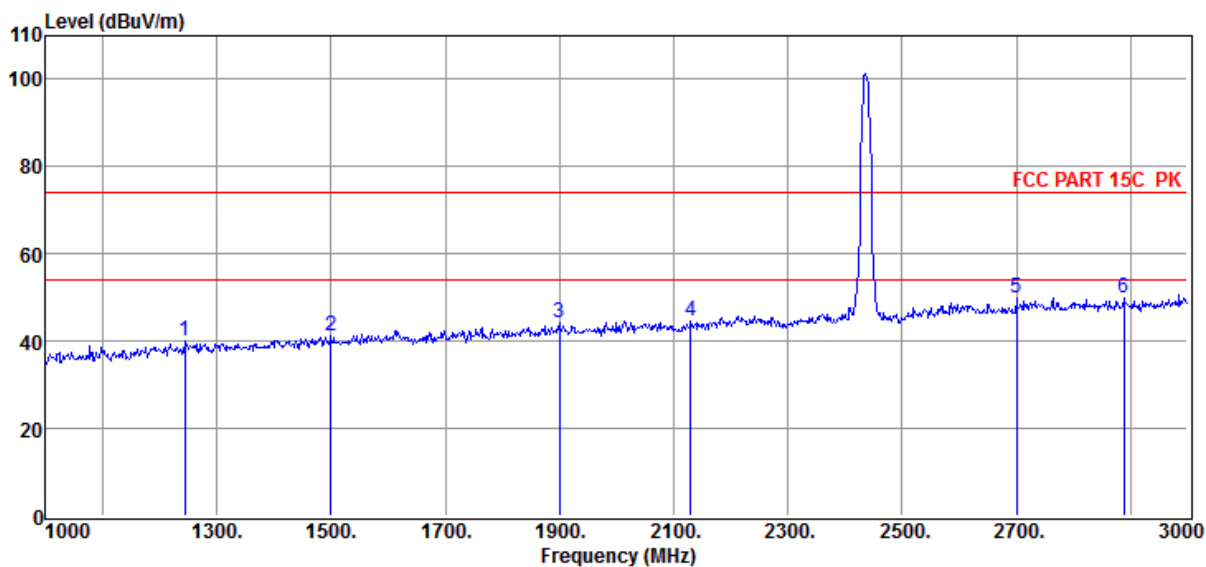

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1244.00	-4.79	40.00	74.00	-34.00	174	299	Peak	HORIZONTAL
2	1500.00	-2.95	41.17	74.00	-32.83	189	336	Peak	HORIZONTAL
3	1900.00	-0.07	44.30	74.00	-29.70	158	199	Peak	HORIZONTAL
4	2130.00	0.89	44.78	74.00	-29.22	164	174	Peak	HORIZONTAL
5	2700.00	5.91	49.76	74.00	-24.24	152	356	Peak	HORIZONTAL
6	2888.00	6.92	49.78	74.00	-24.22	154	220	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11B 1M ANT1 2437MHz

Data: 321

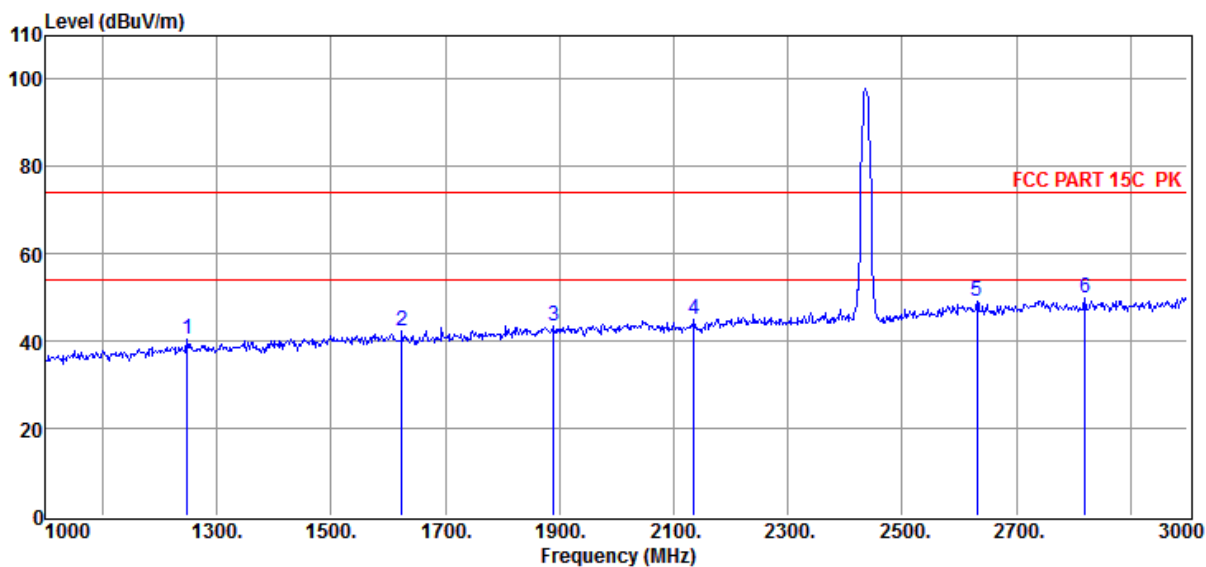

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1248.00	-4.75	40.36	74.00	-33.64	163	313	Peak	VERTICAL
2	1624.00	-2.31	42.39	74.00	-31.61	157	135	Peak	VERTICAL
3	1890.00	-0.12	43.42	74.00	-30.58	158	294	Peak	VERTICAL
4	2136.00	0.97	45.14	74.00	-28.86	180	12	Peak	VERTICAL
5	2632.00	5.52	48.99	74.00	-25.01	176	0	Peak	VERTICAL
6	2820.00	6.51	49.97	74.00	-24.03	179	153	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11B 1M ANT1 2462MHz

Data: 322

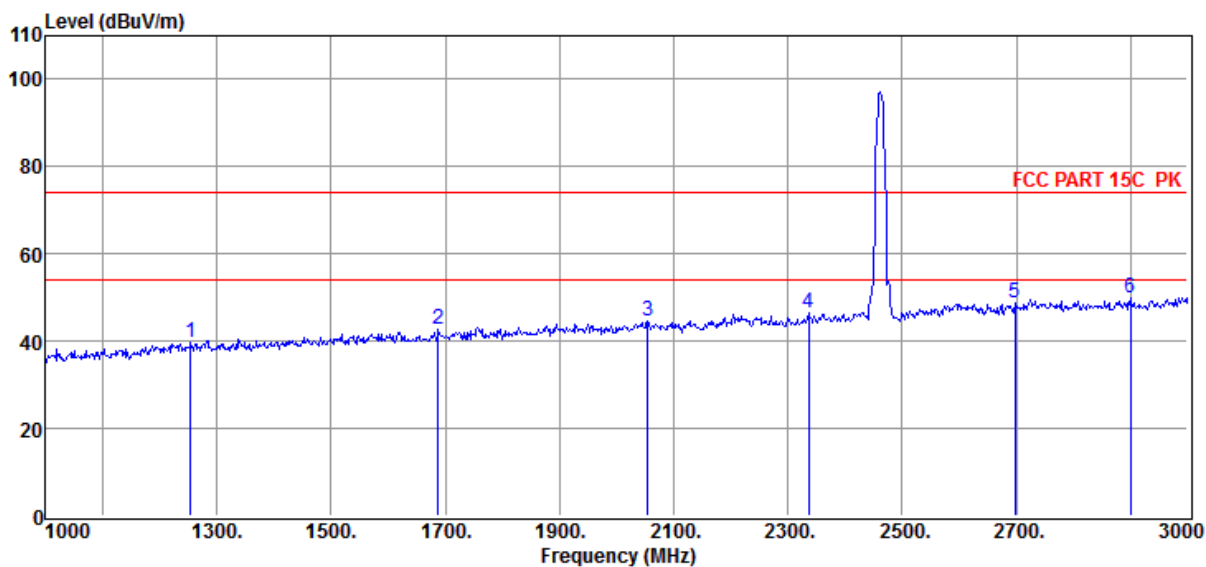

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1254.00	-4.72	39.58	74.00	-34.42	157	291	Peak	VERTICAL
2	1688.00	-2.07	42.56	74.00	-31.44	188	327	Peak	VERTICAL
3	2054.00	1.10	44.63	74.00	-29.37	156	360	Peak	VERTICAL
4	2336.00	2.82	46.56	74.00	-27.44	162	173	Peak	VERTICAL
5	2698.00	5.88	48.68	74.00	-25.32	169	178	Peak	VERTICAL
6	2900.00	6.99	49.79	74.00	-24.21	155	137	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11B 1M ANT1 2462MHz

Data: 323

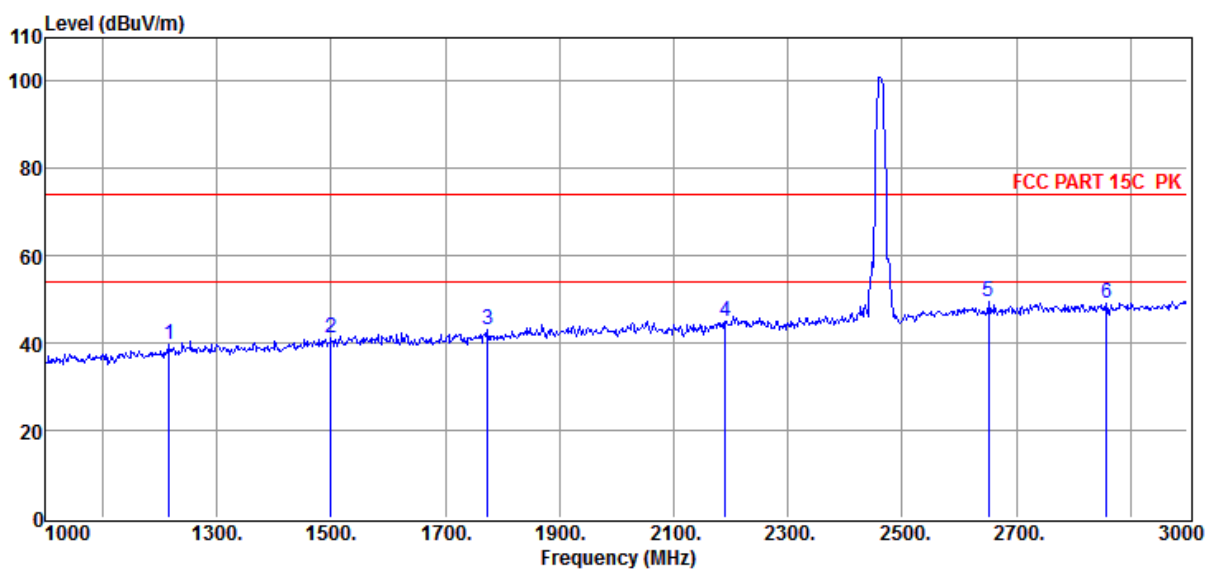

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1216.00	-5.13	39.51	74.00	-34.49	155	224	Peak	HORIZONTAL
2	1500.00	-2.95	41.26	74.00	-32.74	155	349	Peak	HORIZONTAL
3	1774.00	-1.30	43.13	74.00	-30.87	156	246	Peak	HORIZONTAL
4	2190.00	2.13	44.89	74.00	-29.11	170	20	Peak	HORIZONTAL
5	2652.00	5.33	49.59	74.00	-24.41	178	343	Peak	HORIZONTAL
6	2858.00	6.76	49.18	74.00	-24.82	153	100	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11B 1M ANT2 2412MHz

Data: 324

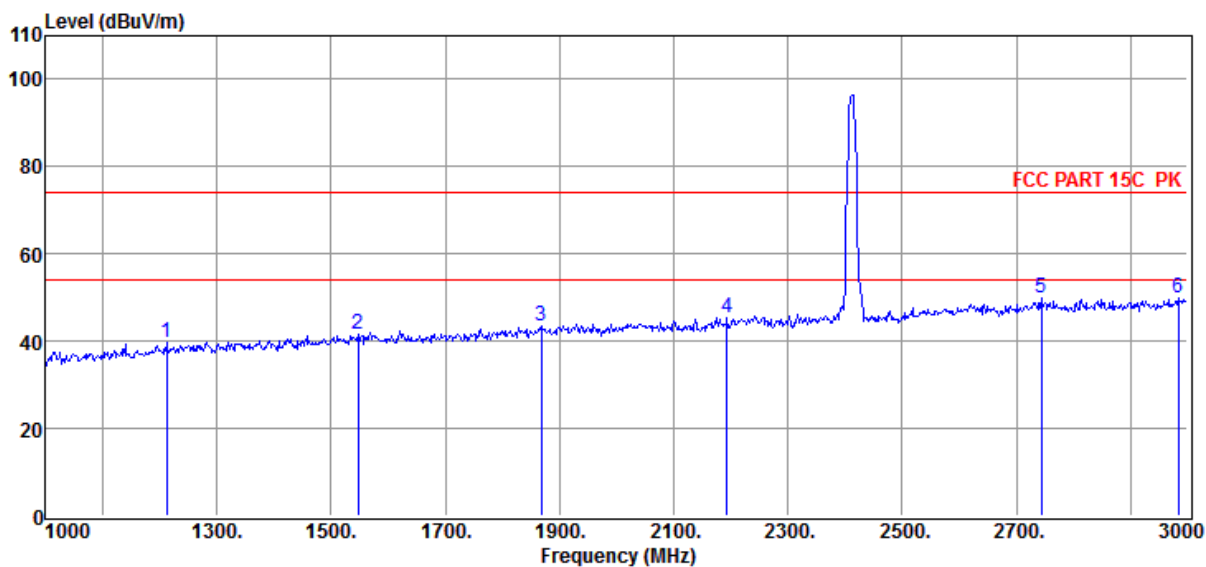

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1212.00	-5.17	39.63	74.00	-34.37	186	13	Peak	HORIZONTAL
2	1548.00	-2.48	41.55	74.00	-32.45	161	7	Peak	HORIZONTAL
3	1868.00	-0.24	43.54	74.00	-30.46	167	114	Peak	HORIZONTAL
4	2194.00	2.23	45.23	74.00	-28.77	164	12	Peak	HORIZONTAL
5	2744.00	6.56	49.75	74.00	-24.25	168	254	Peak	HORIZONTAL
6	2984.00	7.86	49.71	74.00	-24.29	182	53	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11B 1M ANT2 2412MHz

Data: 325

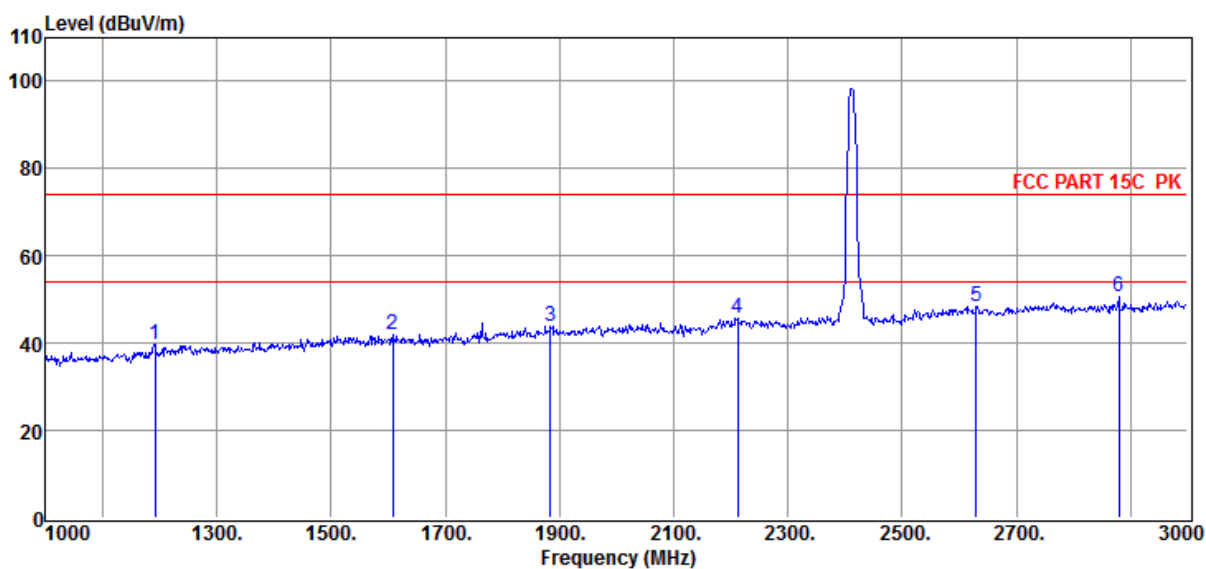

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1192.00	-5.48	39.86	74.00	-34.14	161	215	Peak	VERTICAL
2	1608.00	-2.29	42.02	74.00	-31.98	190	332	Peak	VERTICAL
3	1884.00	-0.16	44.01	74.00	-29.99	152	41	Peak	VERTICAL
4	2212.00	2.37	45.72	74.00	-28.28	161	89	Peak	VERTICAL
5	2630.00	5.54	48.46	74.00	-25.54	178	265	Peak	VERTICAL
6	2880.00	6.88	50.72	74.00	-23.28	185	245	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11B 1M ANT2 2437MHz

Data: 326

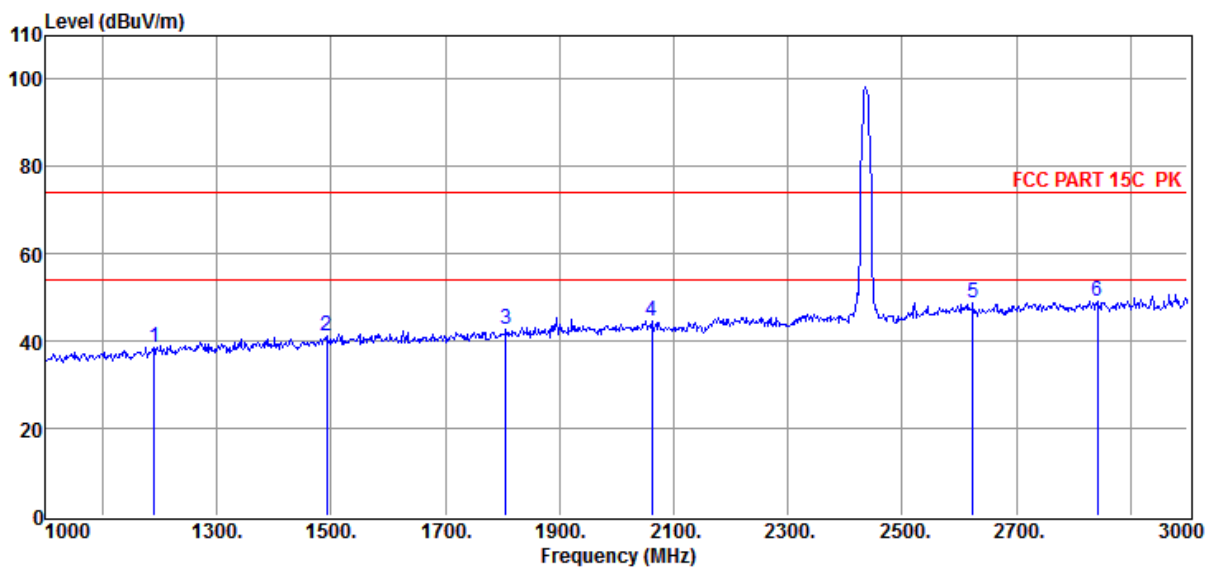

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1190.00	-5.52	38.51	74.00	-35.49	171	242	Peak	VERTICAL
2	1492.00	-3.03	41.14	74.00	-32.86	180	142	Peak	VERTICAL
3	1806.00	-1.03	42.73	74.00	-31.27	190	115	Peak	VERTICAL
4	2062.00	1.00	44.63	74.00	-29.37	151	191	Peak	VERTICAL
5	2624.00	5.62	48.71	74.00	-25.29	174	161	Peak	VERTICAL
6	2842.00	6.66	49.33	74.00	-24.67	172	271	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11B 1M ANT2 2437MHz

Data: 327

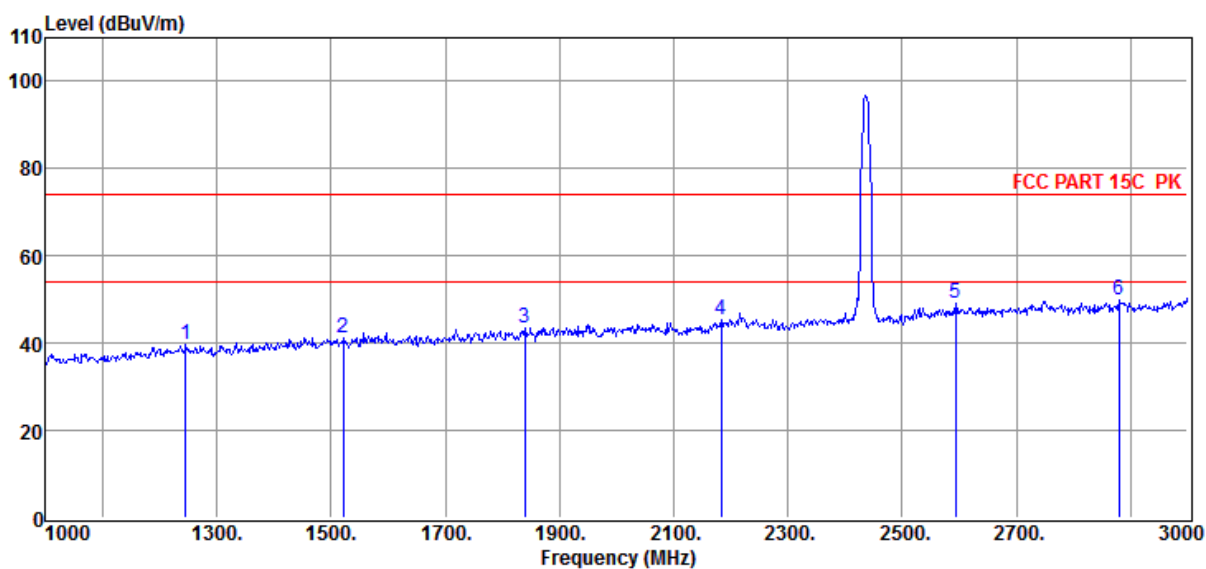

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1246.00	-4.77	39.76	74.00	-34.24	169	70	Peak	HORIZONTAL
2	1522.00	-2.74	41.25	74.00	-32.75	183	264	Peak	HORIZONTAL
3	1840.00	-0.49	43.34	74.00	-30.66	175	281	Peak	HORIZONTAL
4	2184.00	1.98	45.53	74.00	-28.47	185	187	Peak	HORIZONTAL
5	2594.00	5.78	48.97	74.00	-25.03	162	248	Peak	HORIZONTAL
6	2880.00	6.88	49.77	74.00	-24.23	178	14	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11B 1M ANT2 2462MHz

Data: 328

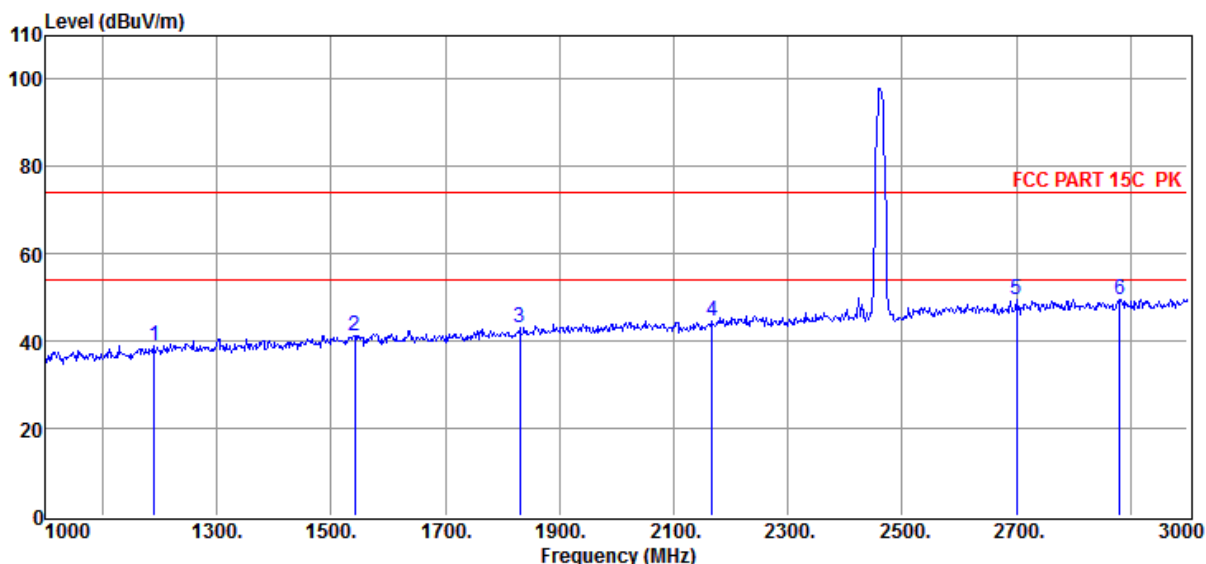

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1190.00	-5.52	38.91	74.00	-35.09	177	40	Peak	HORIZONTAL
2	1542.00	-2.54	41.26	74.00	-32.74	165	257	Peak	HORIZONTAL
3	1830.00	-0.65	43.19	74.00	-30.81	162	262	Peak	HORIZONTAL
4	2168.00	1.59	44.68	74.00	-29.32	178	49	Peak	HORIZONTAL
5	2700.00	5.91	49.62	74.00	-24.38	161	307	Peak	HORIZONTAL
6	2882.00	6.89	49.47	74.00	-24.53	179	25	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11B 1M ANT2 2462MHz

Data: 329

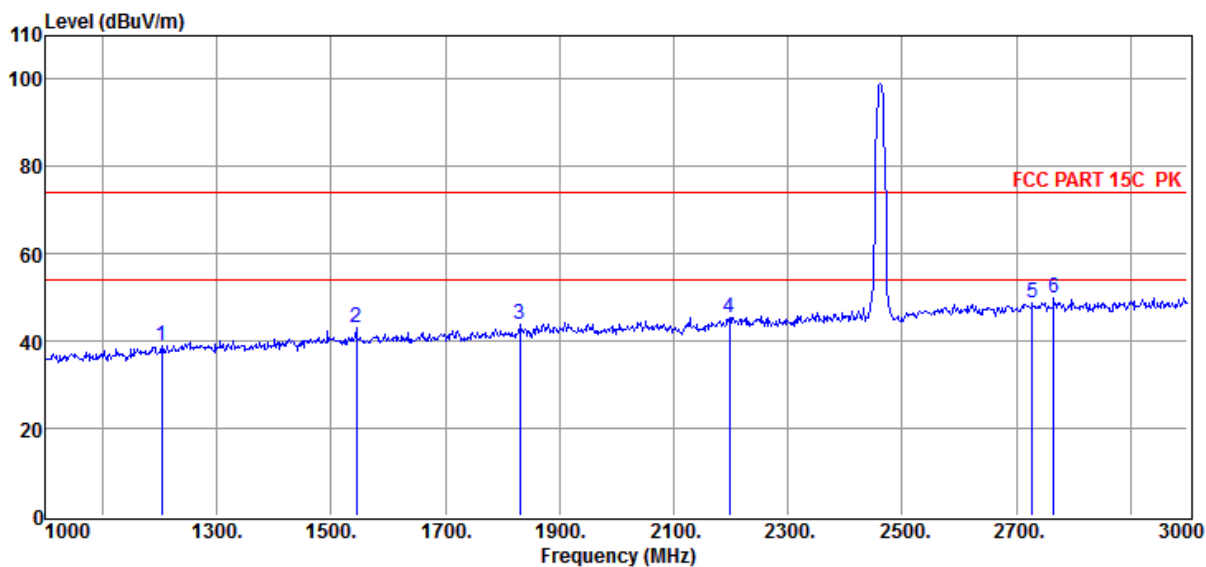

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1204.00	-5.27	39.11	74.00	-34.89	161	205	Peak	VERTICAL
2	1544.00	-2.52	43.24	74.00	-30.76	157	195	Peak	VERTICAL
3	1830.00	-0.65	43.81	74.00	-30.19	184	326	Peak	VERTICAL
4	2198.00	2.33	45.29	74.00	-28.71	185	292	Peak	VERTICAL
5	2728.00	6.33	48.91	74.00	-25.09	190	324	Peak	VERTICAL
6	2766.00	6.57	49.88	74.00	-24.12	171	153	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11G 6M ANT1 2412MHz

Data: 330

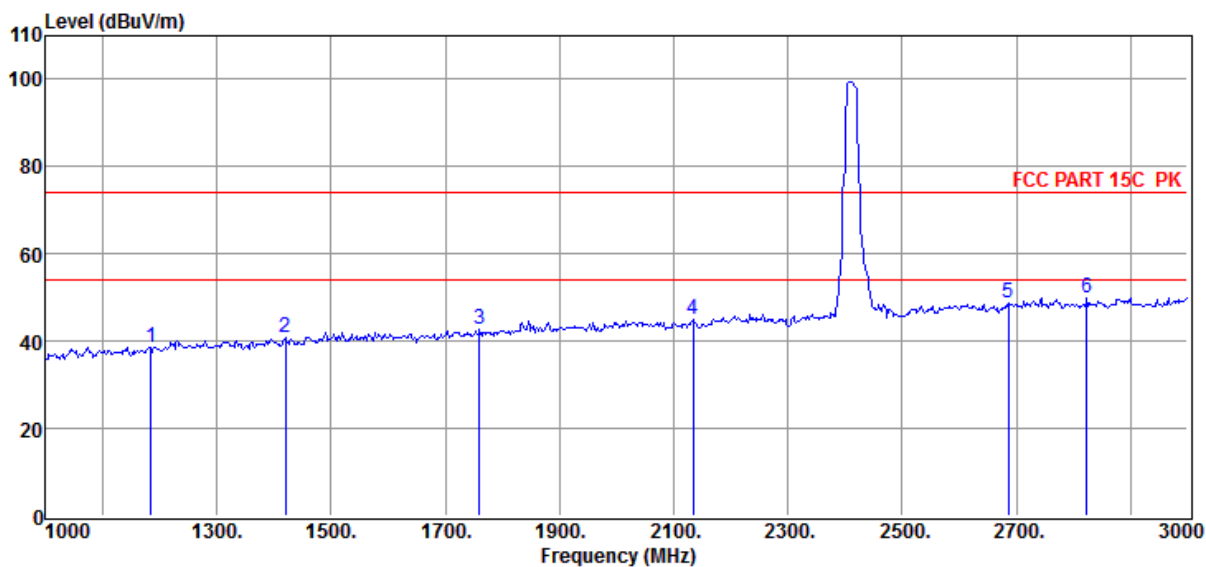

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1184.00	-5.64	38.69	74.00	-35.31	173	125	Peak	VERTICAL
2	1420.00	-3.85	41.00	74.00	-33.00	177	101	Peak	VERTICAL
3	1760.00	-1.38	42.53	74.00	-31.47	182	301	Peak	VERTICAL
4	2134.00	0.94	45.04	74.00	-28.96	184	331	Peak	VERTICAL
5	2686.00	5.74	48.58	74.00	-25.42	181	359	Peak	VERTICAL
6	2824.00	6.54	50.03	74.00	-23.97	162	341	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11G 6M ANT1 2412MHz

Data: 331

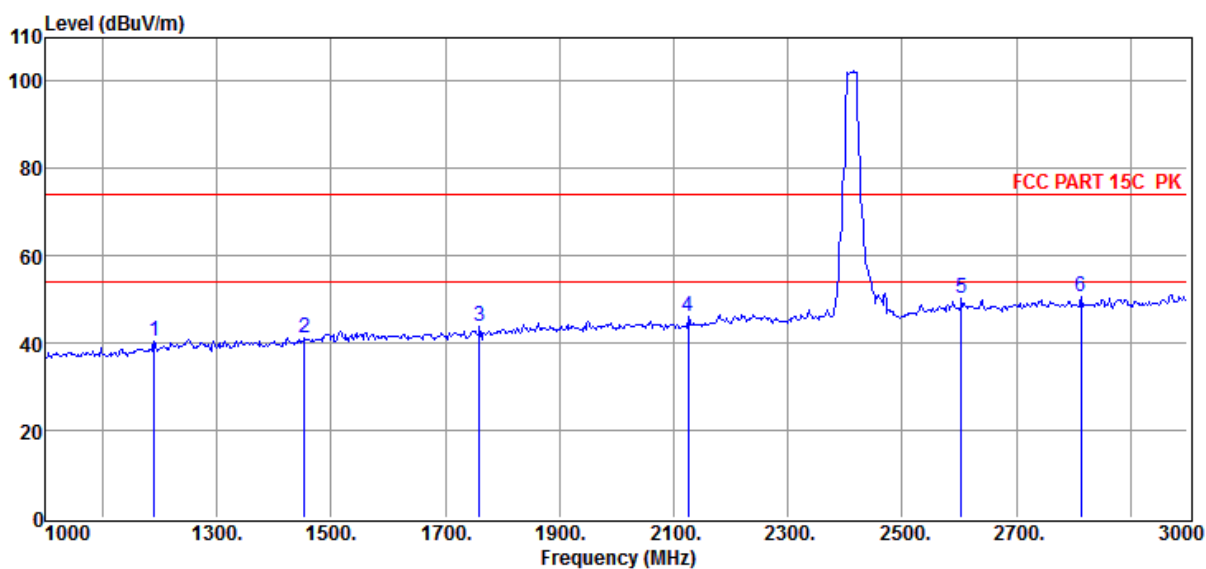

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1190.00	-5.52	40.38	74.00	-33.62	152	217	Peak	HORIZONTAL
2	1454.00	-3.44	41.30	74.00	-32.70	182	315	Peak	HORIZONTAL
3	1760.00	-1.38	43.90	74.00	-30.10	180	12	Peak	HORIZONTAL
4	2126.00	0.84	46.20	74.00	-27.80	171	6	Peak	HORIZONTAL
5	2604.00	5.86	50.10	74.00	-23.90	188	146	Peak	HORIZONTAL
6	2814.00	6.47	50.74	74.00	-23.26	159	209	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11G 6M ANT1 2437MHz

Data: 332

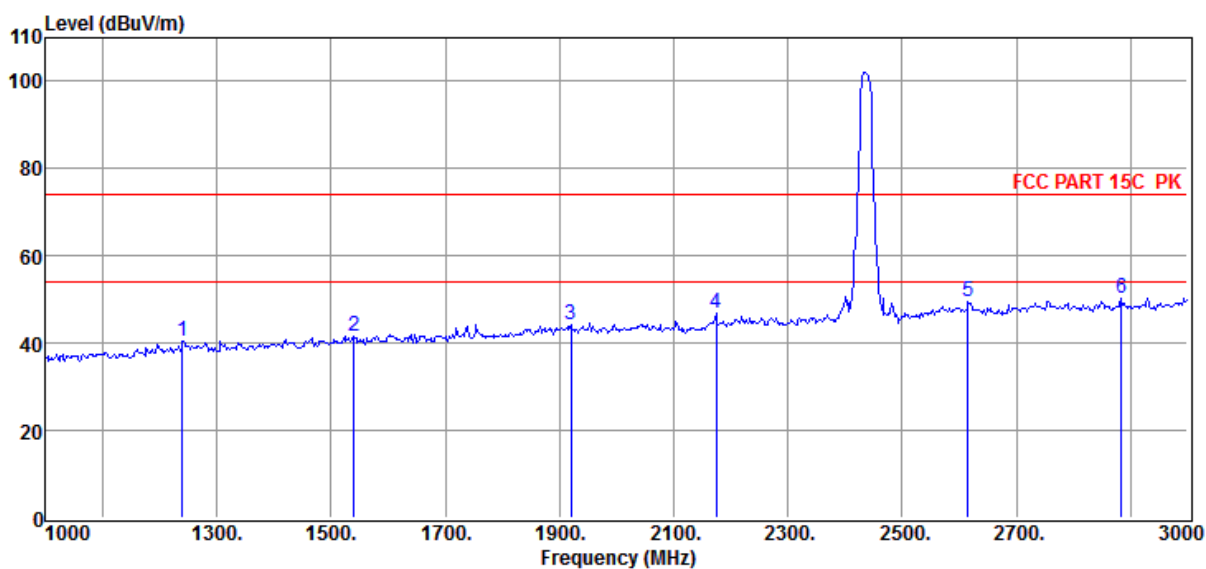

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1240.00	-4.84	40.53	74.00	-33.47	169	298	Peak	HORIZONTAL
2	1540.00	-2.56	41.47	74.00	-32.53	169	42	Peak	HORIZONTAL
3	1920.00	0.08	44.12	74.00	-29.88	172	76	Peak	HORIZONTAL
4	2174.00	1.74	46.72	74.00	-27.28	186	106	Peak	HORIZONTAL
5	2616.00	5.71	49.37	74.00	-24.63	186	350	Peak	HORIZONTAL
6	2884.00	6.90	50.16	74.00	-23.84	162	322	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11G 6M ANT1 2437MHz

Data: 333

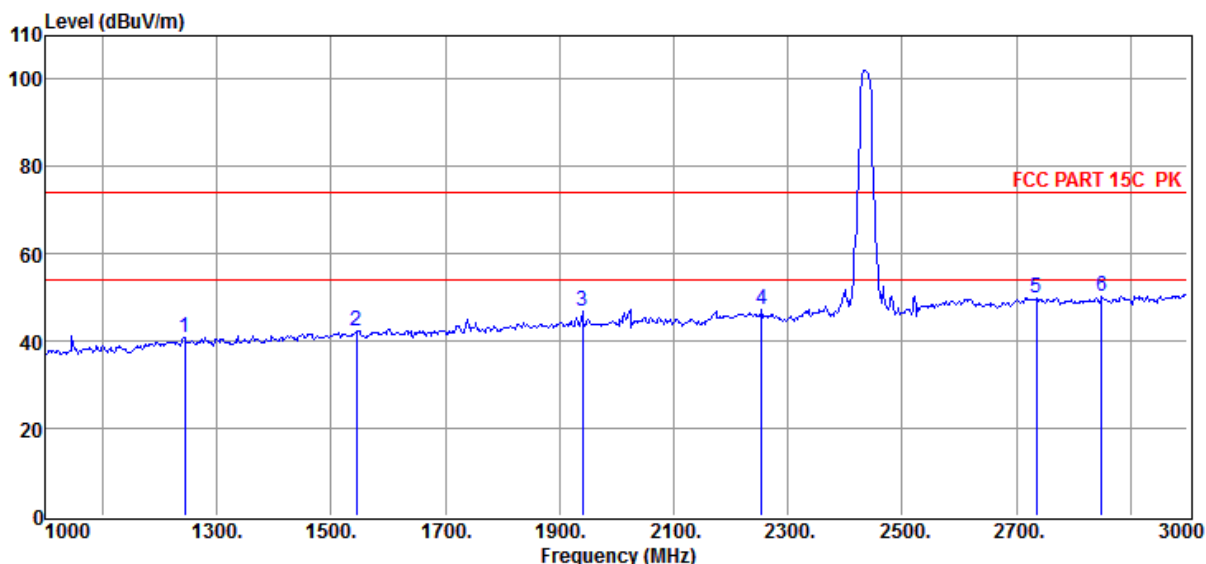

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1244.00	-4.79	40.85	74.00	-33.15	188	325	Peak	VERTICAL
2	1544.00	-2.52	42.49	74.00	-31.51	189	316	Peak	VERTICAL
3	1940.00	0.23	46.75	74.00	-27.25	155	62	Peak	VERTICAL
4	2254.00	2.34	47.30	74.00	-26.70	150	138	Peak	VERTICAL
5	2736.00	6.44	49.98	74.00	-24.02	190	162	Peak	VERTICAL
6	2850.00	6.71	50.46	74.00	-23.54	188	270	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11G 6M ANT1 2462MHz

Data: 334

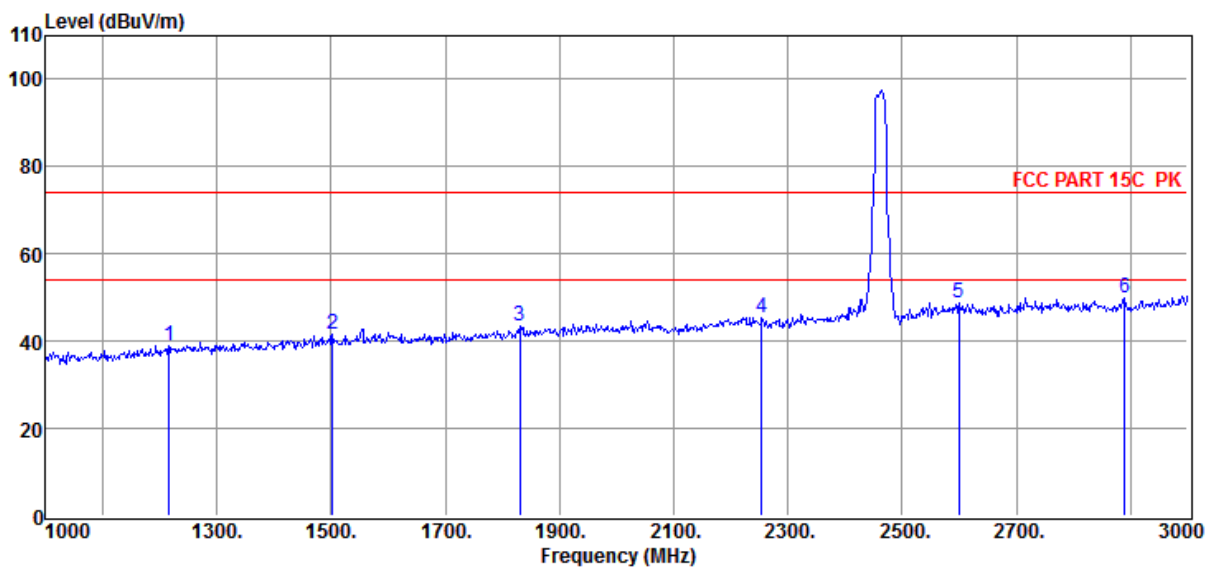

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1216.00	-5.13	39.04	74.00	-34.96	173	360	Peak	VERTICAL
2	1502.00	-2.93	41.40	74.00	-32.60	174	77	Peak	VERTICAL
3	1830.00	-0.65	43.37	74.00	-30.63	168	136	Peak	VERTICAL
4	2254.00	2.34	45.26	74.00	-28.74	150	180	Peak	VERTICAL
5	2600.00	5.91	48.86	74.00	-25.14	157	141	Peak	VERTICAL
6	2890.00	6.93	49.97	74.00	-24.03	164	87	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11G 6M ANT1 2462MHz

Data: 335

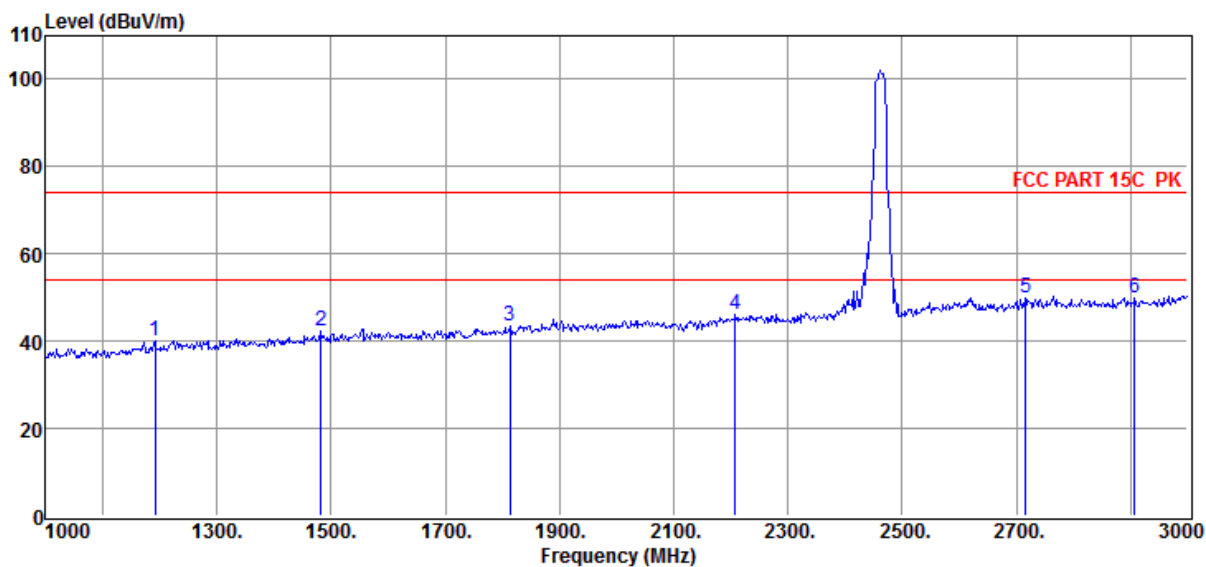

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1192.00	-5.48	40.05	74.00	-33.95	185	354	Peak	HORIZONTAL
2	1482.00	-3.14	42.52	74.00	-31.48	173	143	Peak	HORIZONTAL
3	1814.00	-0.91	43.51	74.00	-30.49	157	321	Peak	HORIZONTAL
4	2208.00	2.37	45.96	74.00	-28.04	172	152	Peak	HORIZONTAL
5	2716.00	6.14	49.98	74.00	-24.02	172	168	Peak	HORIZONTAL
6	2908.00	6.93	49.97	74.00	-24.03	167	24	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11G 6M ANT2 2412MHz

Data: 336

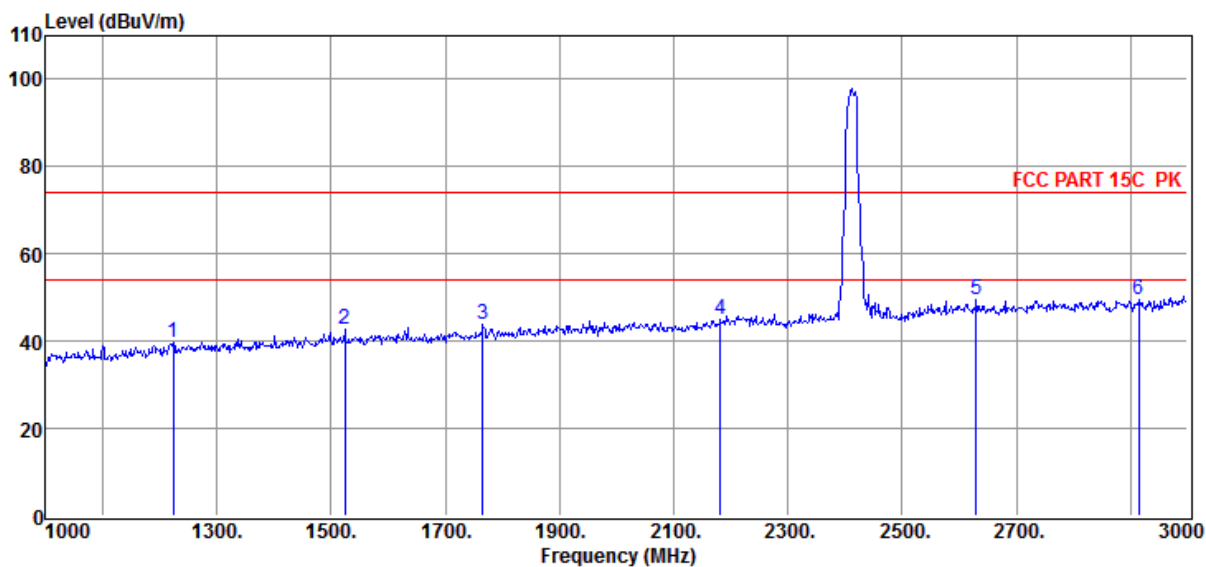

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1224.00	-5.03	39.62	74.00	-34.38	163	9	Peak	HORIZONTAL
2	1524.00	-2.72	42.65	74.00	-31.35	187	236	Peak	HORIZONTAL
3	1766.00	-1.34	43.69	74.00	-30.31	174	205	Peak	HORIZONTAL
4	2182.00	1.93	44.95	74.00	-29.05	162	102	Peak	HORIZONTAL
5	2630.00	5.54	49.63	74.00	-24.37	173	89	Peak	HORIZONTAL
6	2914.00	6.89	49.61	74.00	-24.39	182	199	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11G 6M ANT2 2412MHz

Data: 337

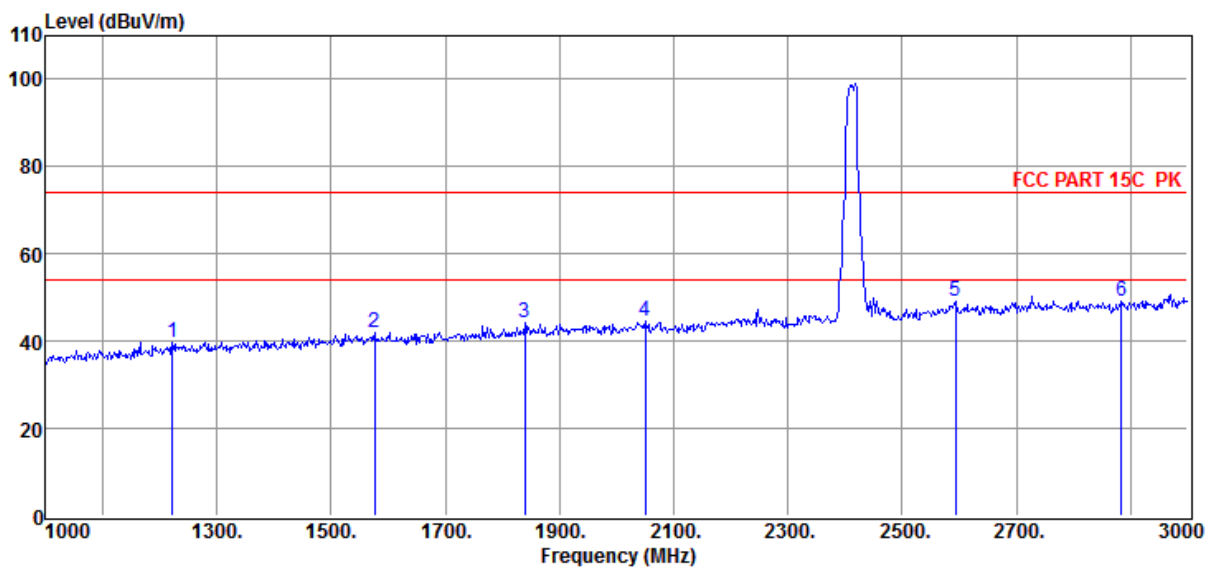

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1222.00	-5.05	39.64	74.00	-34.36	165	264	Peak	VERTICAL
2	1576.00	-2.37	42.11	74.00	-31.89	188	319	Peak	VERTICAL
3	1840.00	-0.49	44.04	74.00	-29.96	158	28	Peak	VERTICAL
4	2050.00	1.16	44.64	74.00	-29.36	160	219	Peak	VERTICAL
5	2594.00	5.78	49.26	74.00	-24.74	181	143	Peak	VERTICAL
6	2884.00	6.90	49.23	74.00	-24.77	185	337	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11G 6M ANT2 2437MHz

Data: 338

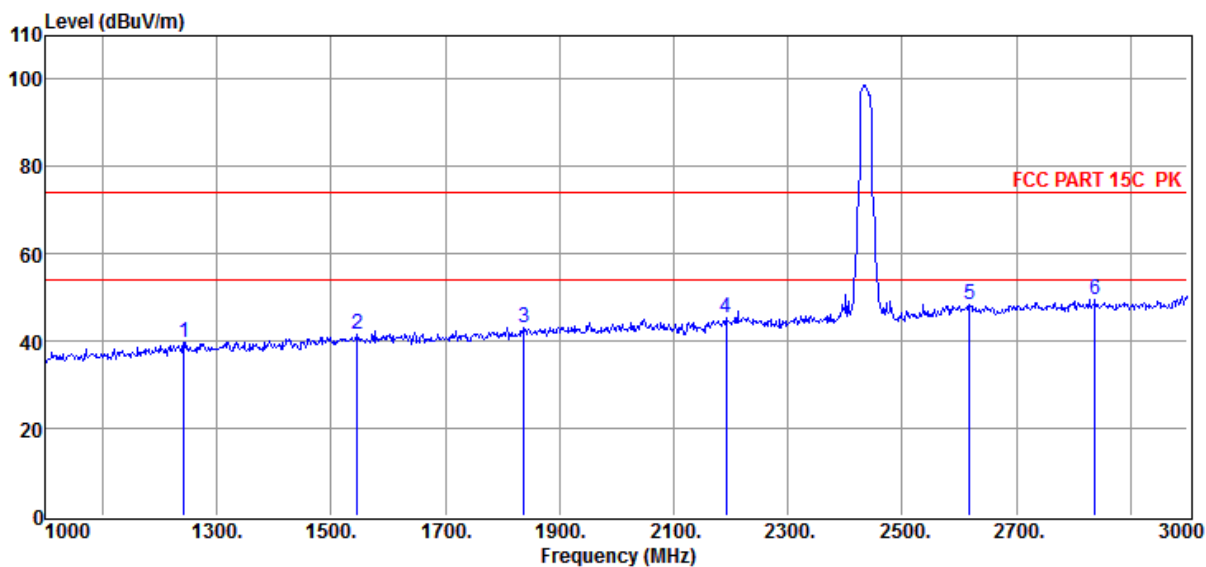

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1242.00	-4.81	39.67	74.00	-34.33	165	84	Peak	VERTICAL
2	1546.00	-2.50	41.55	74.00	-32.45	160	181	Peak	VERTICAL
3	1838.00	-0.52	43.16	74.00	-30.84	174	74	Peak	VERTICAL
4	2192.00	2.17	45.24	74.00	-28.76	160	304	Peak	VERTICAL
5	2618.00	5.69	48.37	74.00	-25.63	171	334	Peak	VERTICAL
6	2838.00	6.63	49.56	74.00	-24.44	168	78	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11G 6M ANT2 2437MHz

Data: 339

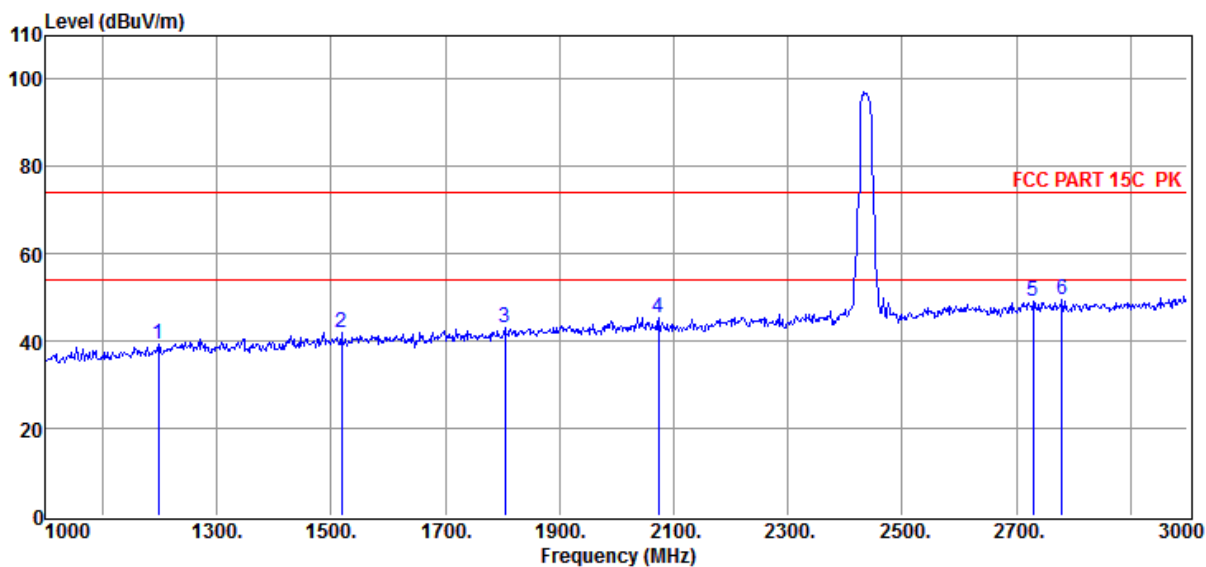

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1198.00	-5.36	39.24	74.00	-34.76	161	194	Peak	HORIZONTAL
2	1518.00	-2.77	41.94	74.00	-32.06	167	104	Peak	HORIZONTAL
3	1804.00	-1.07	43.06	74.00	-30.94	181	309	Peak	HORIZONTAL
4	2074.00	0.84	45.42	74.00	-28.58	172	286	Peak	HORIZONTAL
5	2730.00	6.35	49.29	74.00	-24.71	175	327	Peak	HORIZONTAL
6	2780.00	6.49	49.52	74.00	-24.48	173	259	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11G 6M ANT2 2462MHz

Data: 340

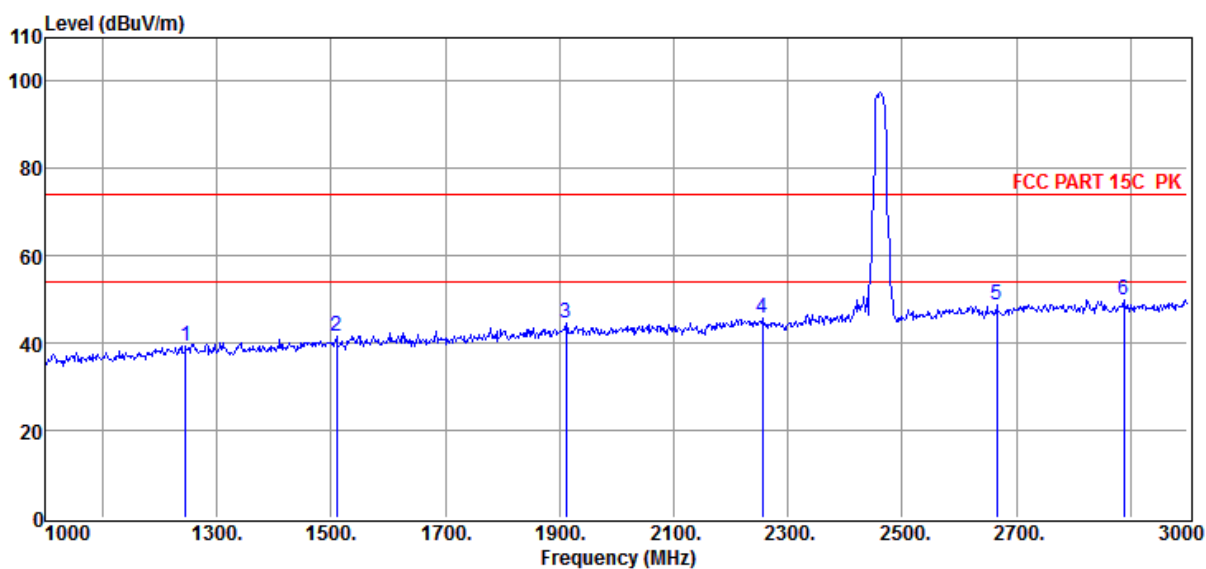

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1246.00	-4.77	39.22	74.00	-34.78	153	317	Peak	HORIZONTAL
2	1510.00	-2.85	41.77	74.00	-32.23	179	273	Peak	HORIZONTAL
3	1912.00	0.01	44.73	74.00	-29.27	154	135	Peak	HORIZONTAL
4	2256.00	2.31	45.78	74.00	-28.22	175	285	Peak	HORIZONTAL
5	2666.00	5.49	48.88	74.00	-25.12	186	275	Peak	HORIZONTAL
6	2888.00	6.92	50.05	74.00	-23.95	152	226	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3'C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11G 6M ANT2 2462MHz

Data: 341

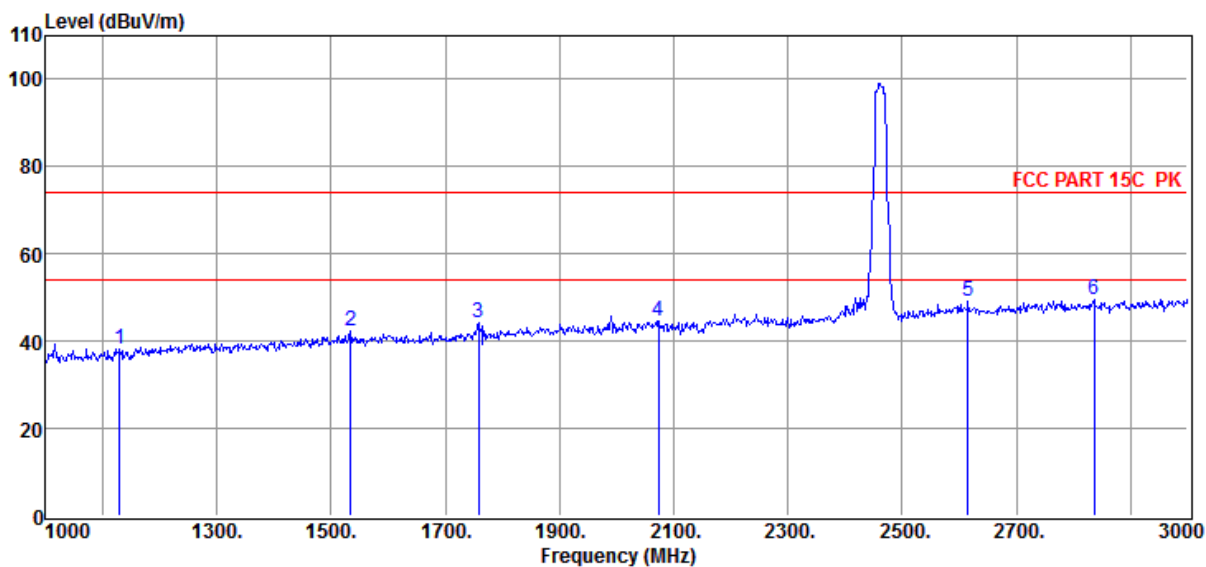

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1130.00	-6.49	38.25	74.00	-35.75	172	109	Peak	VERTICAL
2	1534.00	-2.62	42.52	74.00	-31.48	164	140	Peak	VERTICAL
3	1758.00	-1.39	44.14	74.00	-29.86	151	190	Peak	VERTICAL
4	2074.00	0.84	44.64	74.00	-29.36	162	352	Peak	VERTICAL
5	2616.00	5.71	49.23	74.00	-24.77	178	35	Peak	VERTICAL
6	2836.00	6.62	49.55	74.00	-24.45	159	336	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS0 ANT1+ANT2 2412MHz

Data: 342

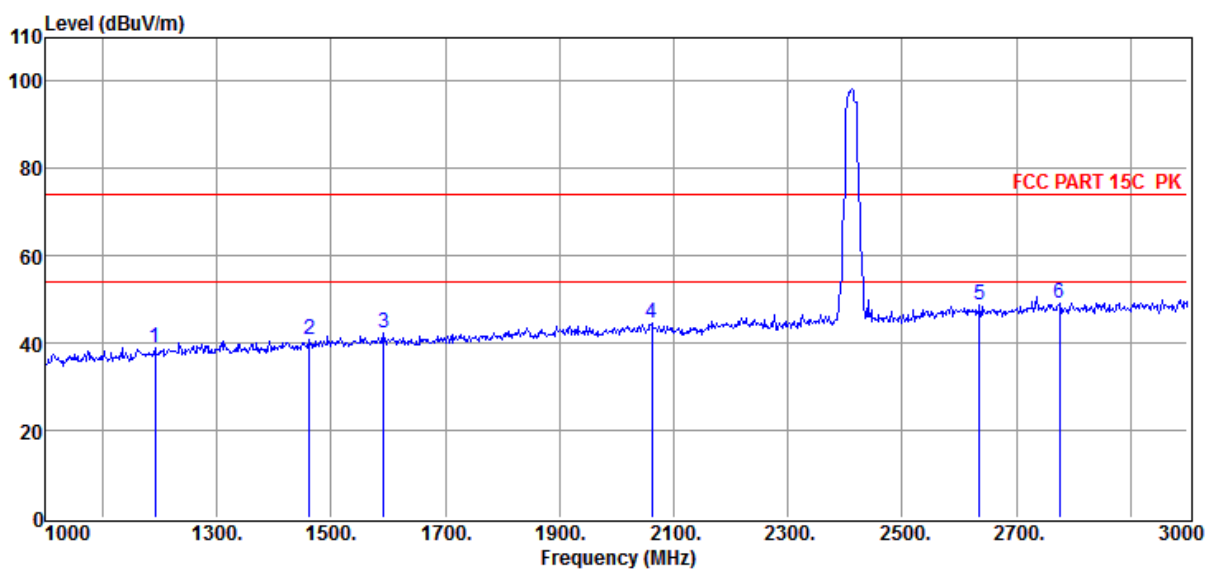

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1192.00	-5.48	38.95	74.00	-35.05	186	271	Peak	VERTICAL
2	1462.00	-3.35	40.70	74.00	-33.30	158	8	Peak	VERTICAL
3	1592.00	-2.31	42.41	74.00	-31.59	188	102	Peak	VERTICAL
4	2062.00	1.00	44.66	74.00	-29.34	171	261	Peak	VERTICAL
5	2636.00	5.47	48.65	74.00	-25.35	159	17	Peak	VERTICAL
6	2776.00	6.51	49.32	74.00	-24.68	175	200	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS0 ANT1+ANT2 2412MHz

Data: 343

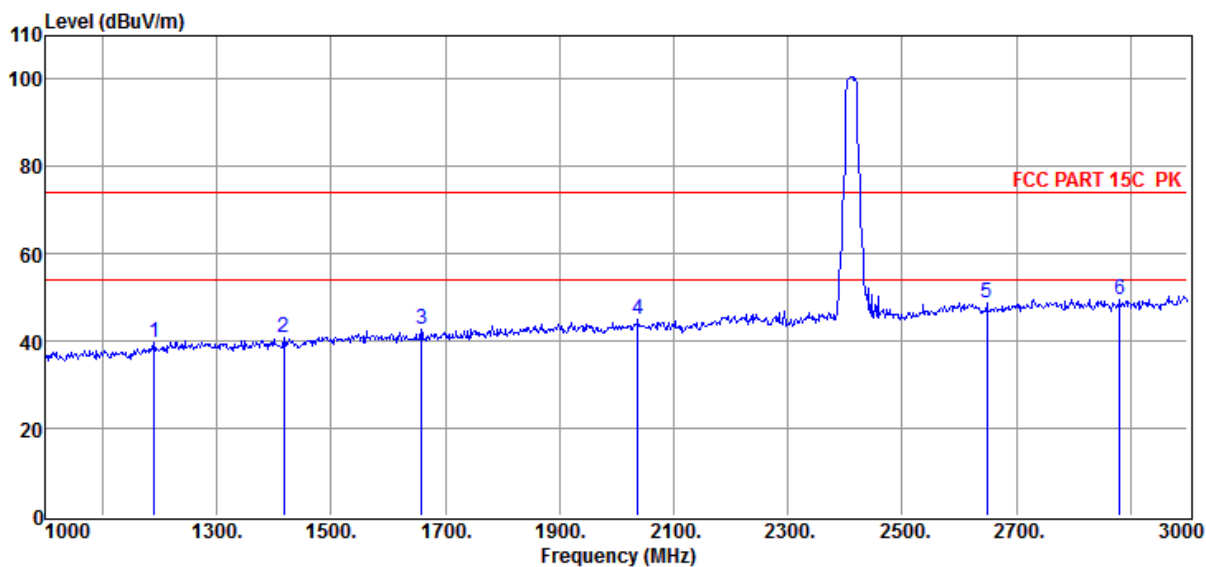

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1190.00	-5.52	39.62	74.00	-34.38	153	278	Peak	HORIZONTAL
2	1418.00	-3.88	40.76	74.00	-33.24	176	249	Peak	HORIZONTAL
3	1658.00	-2.29	42.75	74.00	-31.25	150	247	Peak	HORIZONTAL
4	2038.00	0.93	45.11	74.00	-28.89	152	297	Peak	HORIZONTAL
5	2648.00	5.33	48.95	74.00	-25.05	178	322	Peak	HORIZONTAL
6	2882.00	6.89	49.43	74.00	-24.57	176	139	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS0 ANT1+ANT2 2437MHz

Data: 344

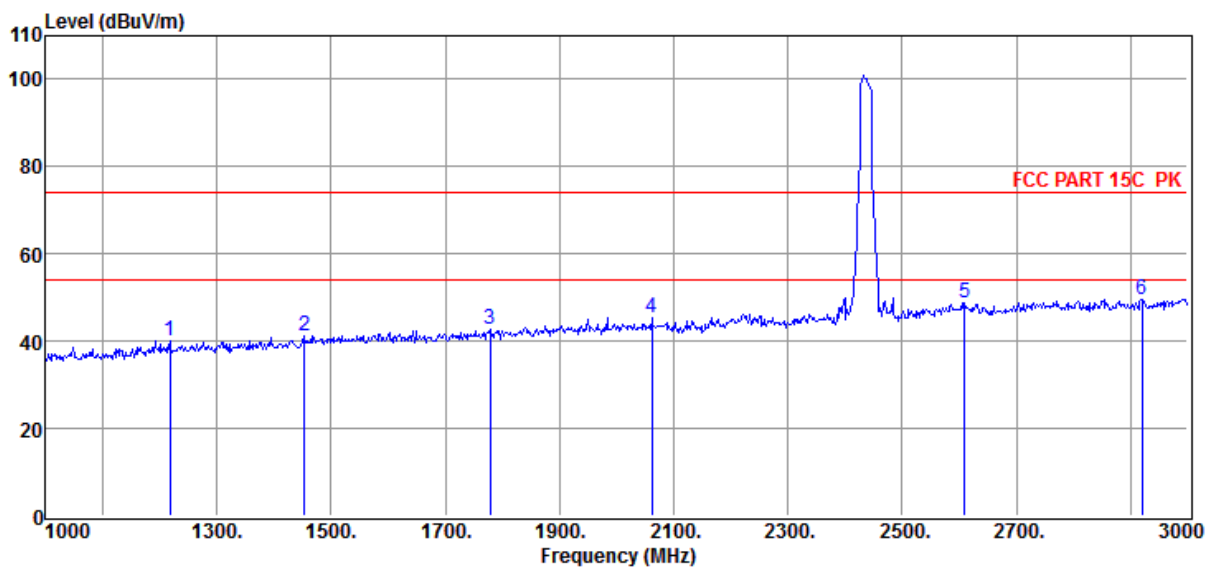

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1218.00	-5.11	40.22	74.00	-33.78	162	31	Peak	HORIZONTAL
2	1454.00	-3.44	41.13	74.00	-32.87	179	220	Peak	HORIZONTAL
3	1778.00	-1.26	42.79	74.00	-31.21	176	62	Peak	HORIZONTAL
4	2062.00	1.00	45.49	74.00	-28.51	159	71	Peak	HORIZONTAL
5	2610.00	5.79	48.84	74.00	-25.16	153	194	Peak	HORIZONTAL
6	2920.00	6.84	49.69	74.00	-24.31	184	240	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS0 ANT1+ANT2 2437MHz

Data: 345

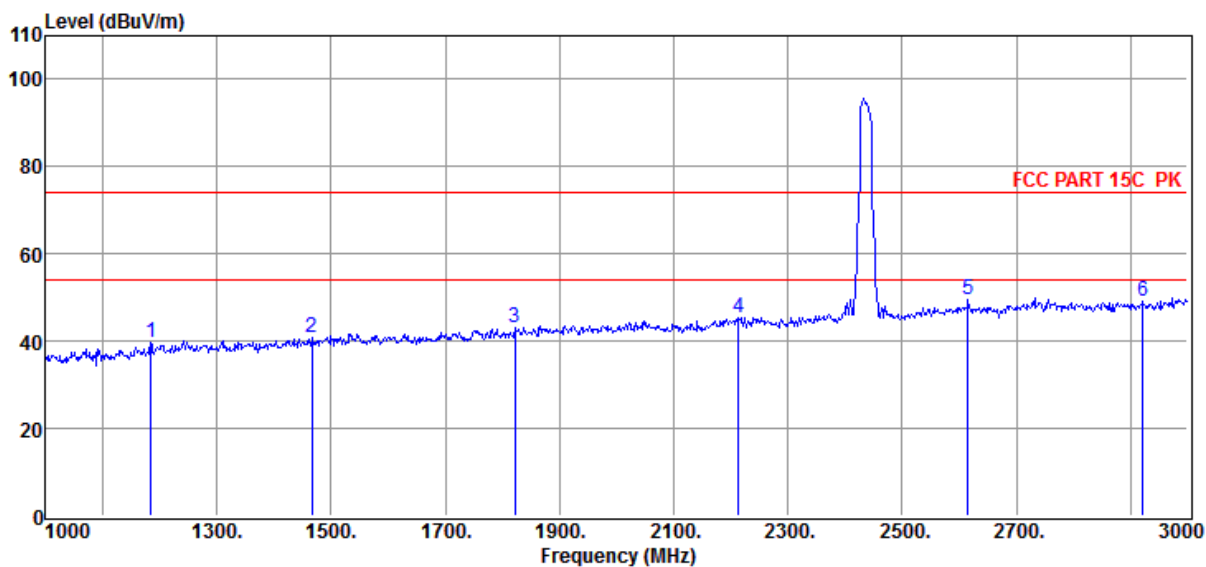

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1184.00	-5.64	39.50	74.00	-34.50	164	17	Peak	VERTICAL
2	1466.00	-3.31	40.69	74.00	-33.31	167	35	Peak	VERTICAL
3	1822.00	-0.78	42.99	74.00	-31.01	155	331	Peak	VERTICAL
4	2214.00	2.37	45.42	74.00	-28.58	168	339	Peak	VERTICAL
5	2616.00	5.71	49.53	74.00	-24.47	185	109	Peak	VERTICAL
6	2922.00	6.83	49.21	74.00	-24.79	184	88	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS0 ANT1+ANT2 2462MHz

Data: 346

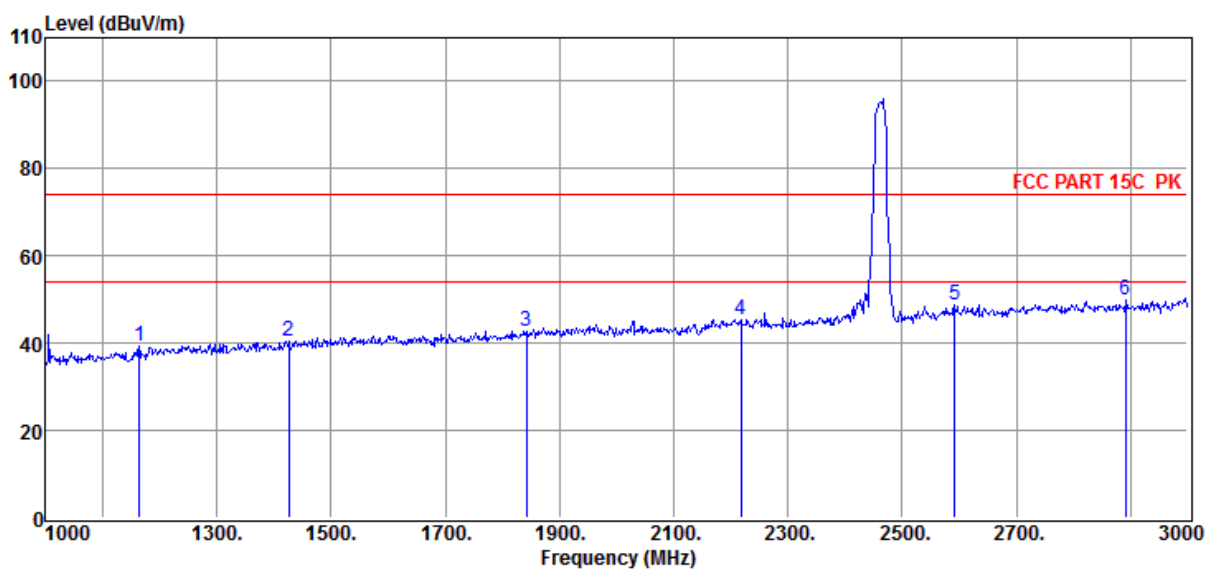

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1164.00	-6.04	39.20	74.00	-34.80	154	103	Peak	VERTICAL
2	1426.00	-3.78	40.39	74.00	-33.61	170	99	Peak	VERTICAL
3	1842.00	-0.46	42.85	74.00	-31.15	150	114	Peak	VERTICAL
4	2218.00	2.37	45.39	74.00	-28.61	178	141	Peak	VERTICAL
5	2592.00	5.73	48.77	74.00	-25.23	174	58	Peak	VERTICAL
6	2892.00	6.94	49.75	74.00	-24.25	187	106	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS0 ANT1+ANT2 2462MHz

Data: 347

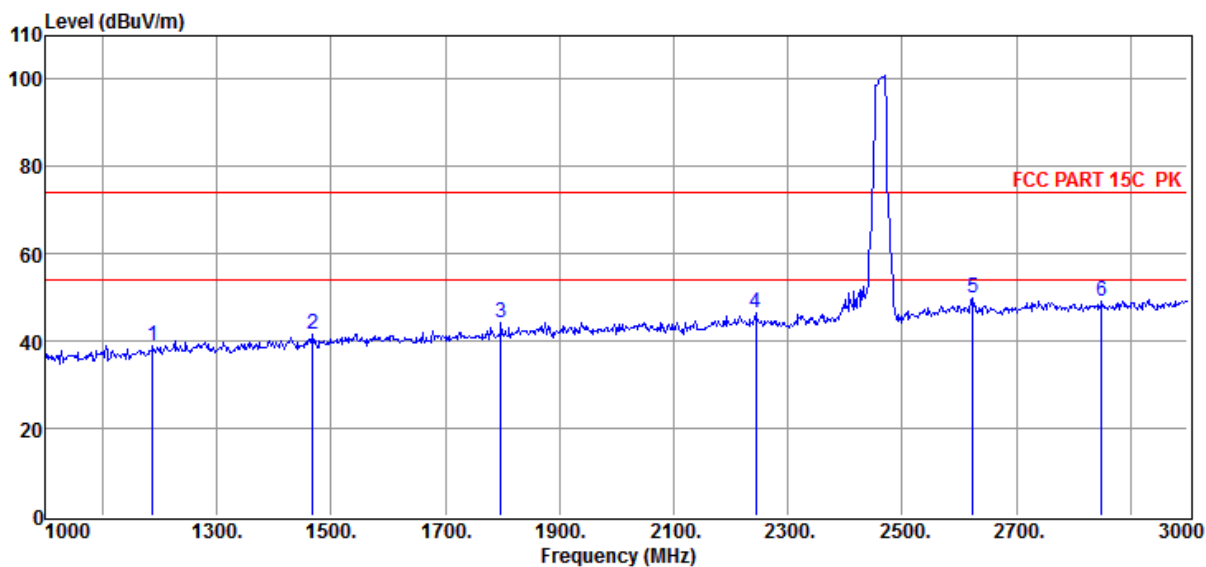

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1188.00	-5.56	39.07	74.00	-34.93	177	321	Peak	HORIZONTAL
2	1468.00	-3.29	41.63	74.00	-32.37	169	257	Peak	HORIZONTAL
3	1798.00	-1.14	44.18	74.00	-29.82	176	83	Peak	HORIZONTAL
4	2244.00	2.37	46.64	74.00	-27.36	150	336	Peak	HORIZONTAL
5	2624.00	5.62	49.86	74.00	-24.14	154	257	Peak	HORIZONTAL
6	2850.00	6.71	49.20	74.00	-24.80	150	183	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS0 ANT1+ANT2 2422MHz

Data: 348

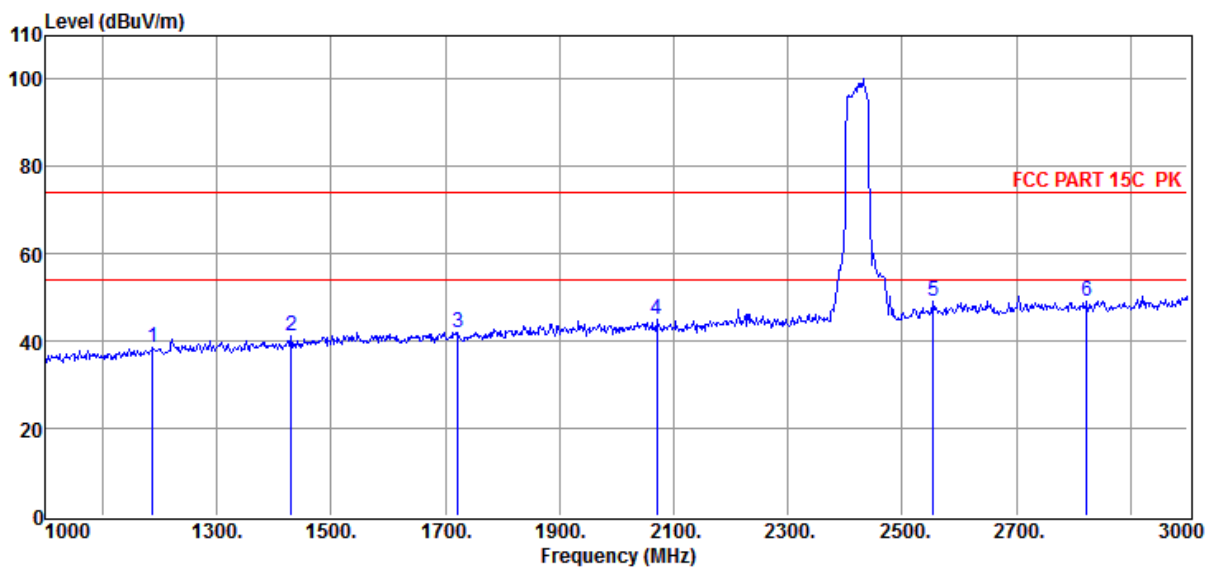

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1188.00	-5.56	38.46	74.00	-35.54	157	55	Peak	HORIZONTAL
2	1430.00	-3.73	41.34	74.00	-32.66	173	140	Peak	HORIZONTAL
3	1722.00	-1.74	41.93	74.00	-32.07	163	276	Peak	HORIZONTAL
4	2070.00	0.89	44.86	74.00	-29.14	183	323	Peak	HORIZONTAL
5	2554.00	4.88	49.15	74.00	-24.85	173	21	Peak	HORIZONTAL
6	2824.00	6.54	49.09	74.00	-24.91	159	228	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS0 ANT1+ANT2 2422MHz

Data: 349

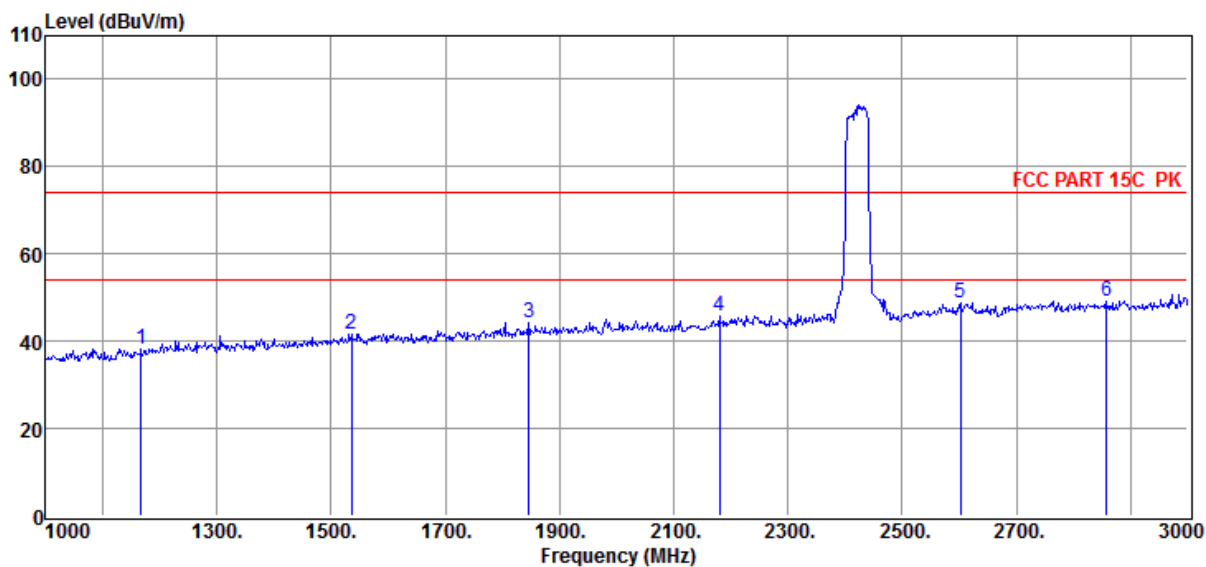

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1168.00	-5.96	38.25	74.00	-35.75	162	314	Peak	VERTICAL
2	1536.00	-2.59	41.70	74.00	-32.30	157	56	Peak	VERTICAL
3	1846.00	-0.39	44.12	74.00	-29.88	157	85	Peak	VERTICAL
4	2180.00	1.88	45.69	74.00	-28.31	188	264	Peak	VERTICAL
5	2602.00	5.88	48.69	74.00	-25.31	165	16	Peak	VERTICAL
6	2858.00	6.76	49.19	74.00	-24.81	167	334	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS0 ANT1+ANT2 2437MHz

Data: 350

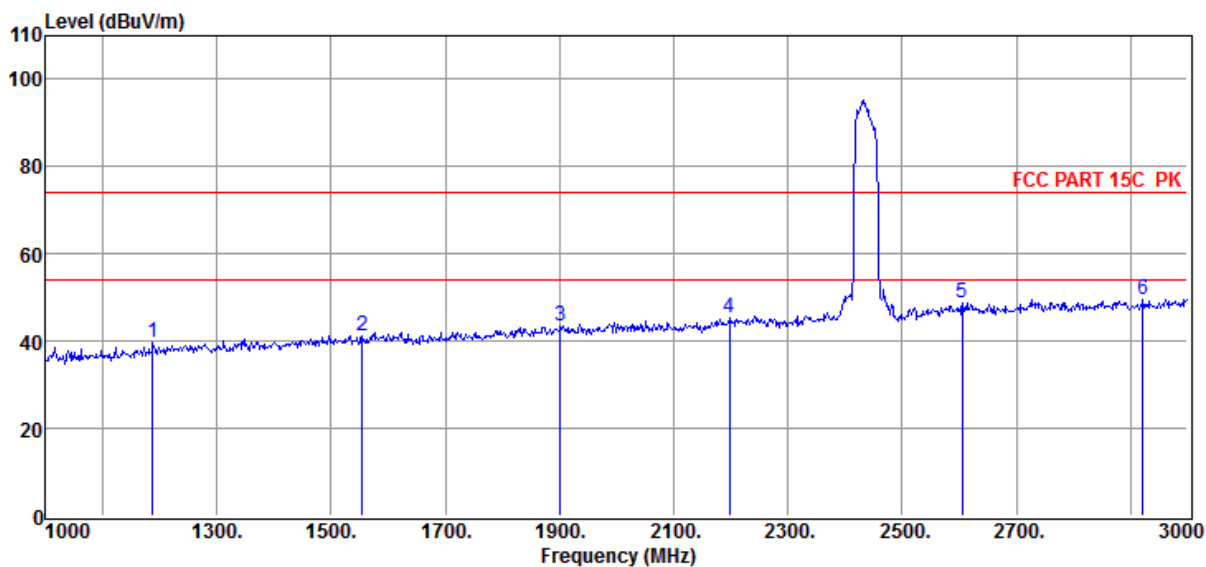

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1188.00	-5.56	39.84	74.00	-34.16	156	82	Peak	VERTICAL
2	1554.00	-2.44	41.14	74.00	-32.86	190	4	Peak	VERTICAL
3	1902.00	-0.06	43.54	74.00	-30.46	167	162	Peak	VERTICAL
4	2198.00	2.33	45.26	74.00	-28.74	169	234	Peak	VERTICAL
5	2606.00	5.83	48.89	74.00	-25.11	160	155	Peak	VERTICAL
6	2922.00	6.83	49.68	74.00	-24.32	156	68	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS0 ANT1+ANT2 2437MHz

Data: 351

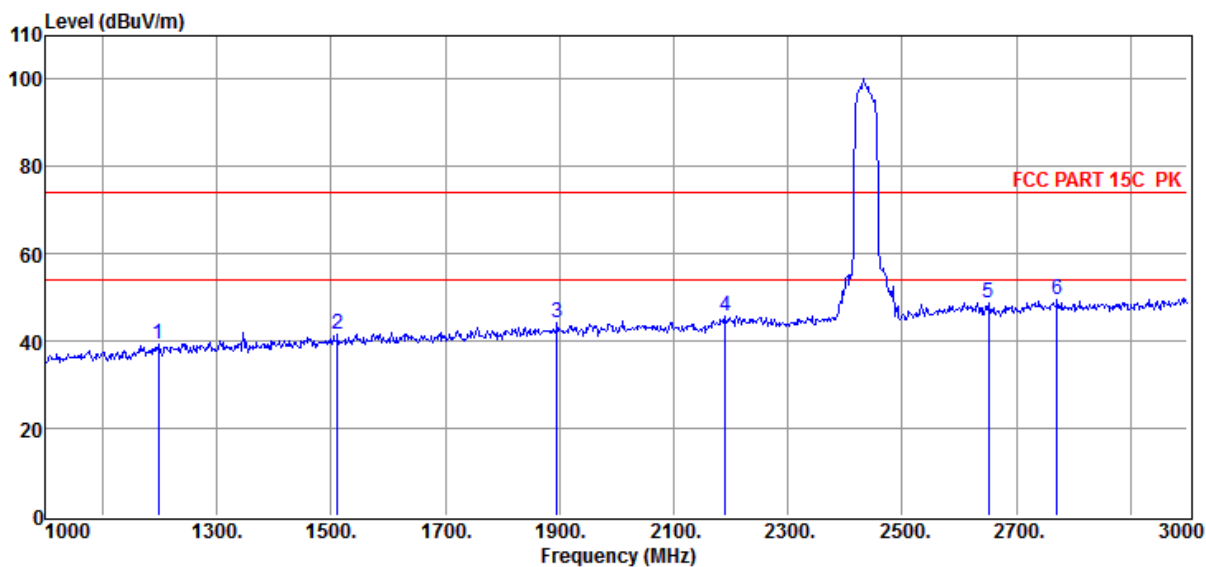

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1198.00	-5.36	39.44	74.00	-34.56	183	239	Peak	HORIZONTAL
2	1512.00	-2.83	41.51	74.00	-32.49	159	154	Peak	HORIZONTAL
3	1896.00	-0.09	44.17	74.00	-29.83	152	181	Peak	HORIZONTAL
4	2190.00	2.13	45.85	74.00	-28.15	166	125	Peak	HORIZONTAL
5	2652.00	5.33	48.83	74.00	-25.17	151	12	Peak	HORIZONTAL
6	2772.00	6.54	49.33	74.00	-24.67	161	120	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS0 ANT1+ANT2 2452MHz

Data: 352

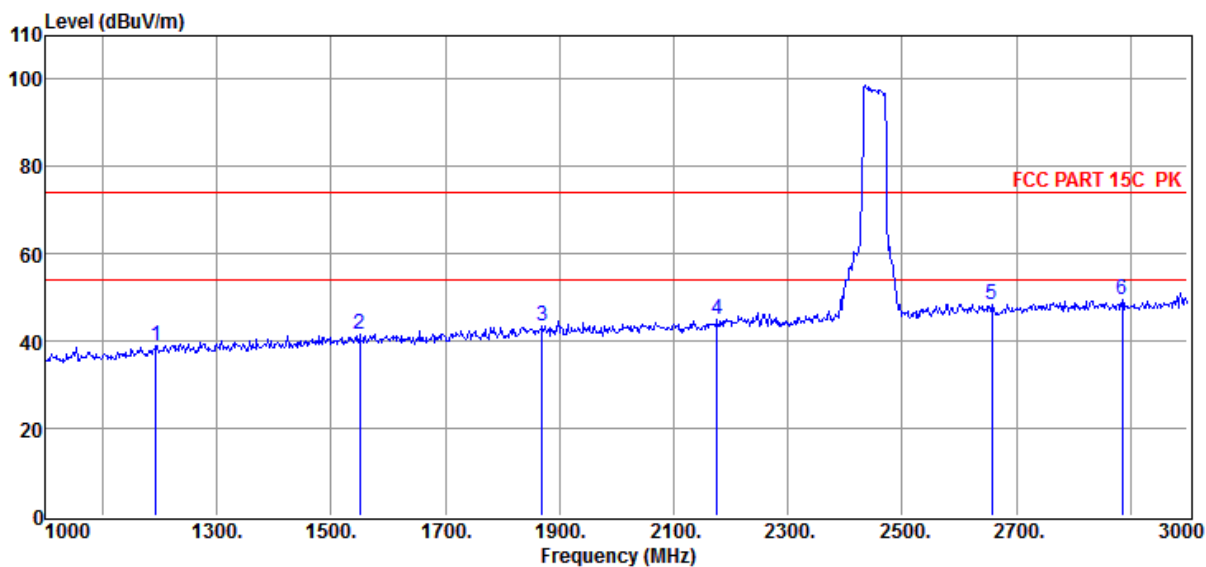

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1194.00	-5.44	39.04	74.00	-34.96	176	58	Peak	HORIZONTAL
2	1550.00	-2.46	41.45	74.00	-32.55	169	163	Peak	HORIZONTAL
3	1870.00	-0.23	43.60	74.00	-30.40	181	97	Peak	HORIZONTAL
4	2176.00	1.78	44.98	74.00	-29.02	160	113	Peak	HORIZONTAL
5	2658.00	5.40	48.53	74.00	-25.47	173	70	Peak	HORIZONTAL
6	2886.00	6.92	49.52	74.00	-24.48	157	118	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS0 ANT1+ANT2 2452MHz

Data: 353

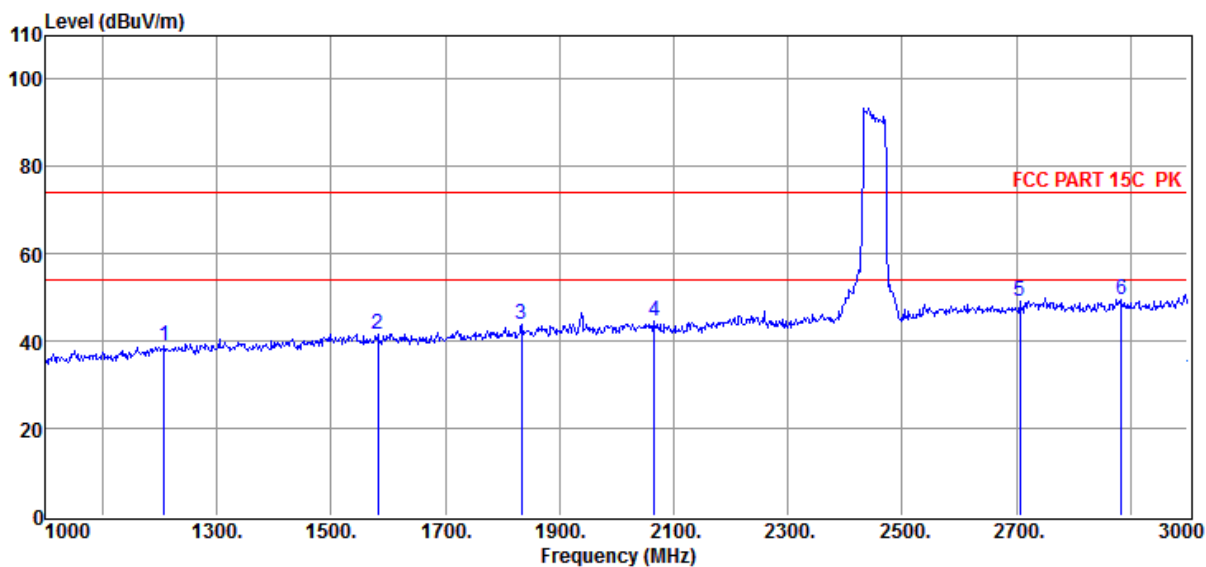

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	1208.00	-5.23	39.11	74.00	-34.89	189	127	Peak	VERTICAL
2	1582.00	-2.34	41.75	74.00	-32.25	173	182	Peak	VERTICAL
3	1834.00	-0.59	43.93	74.00	-30.07	187	82	Peak	VERTICAL
4	2066.00	0.95	44.43	74.00	-29.57	168	289	Peak	VERTICAL
5	2706.00	6.00	49.11	74.00	-24.89	157	206	Peak	VERTICAL
6	2884.00	6.90	49.55	74.00	-24.45	175	44	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission test (1 GHz – 3 GHz)

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3'C,Humi:52%,Press:101.6kPa Antenna/Distance : 3m/VERTICAL

Memo : 11B 1M ANT1 2412MHz

Data: 62

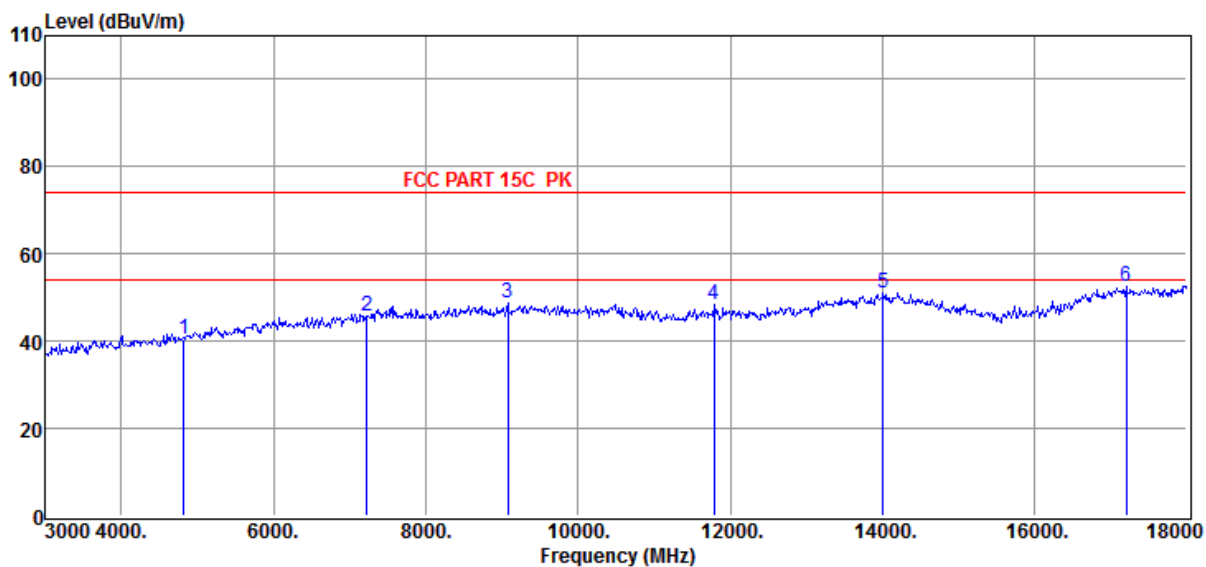

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4824.00	0.83	40.58	74.00	-33.42	176	332	Peak	VERTICAL
2	7230.00	6.10	45.70	74.00	-28.30	153	302	Peak	VERTICAL
3	9075.00	7.08	48.62	74.00	-25.38	160	228	Peak	VERTICAL
4	11790.00	10.02	48.43	74.00	-25.57	156	98	Peak	VERTICAL
5	14010.00	13.01	51.17	74.00	-22.83	160	124	Peak	VERTICAL
6	17205.00	15.57	52.70	74.00	-21.30	180	208	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11B 1M ANT1 2412MHz

Data: 63

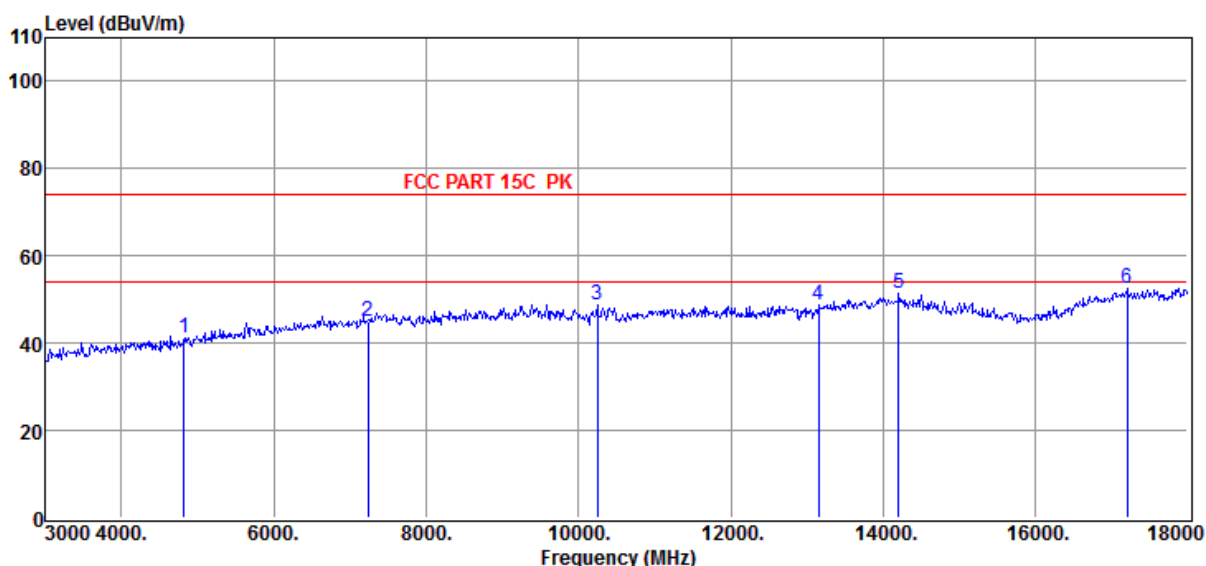

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4824.00	0.83	41.31	74.00	-32.69	150	287	Peak	HORIZONTAL
2	7236.00	6.19	45.00	74.00	-29.00	150	26	Peak	HORIZONTAL
3	10245.00	8.29	48.82	74.00	-25.18	164	141	Peak	HORIZONTAL
4	13155.00	10.43	48.60	74.00	-25.40	151	223	Peak	HORIZONTAL
5	14205.00	14.01	51.54	74.00	-22.46	167	99	Peak	HORIZONTAL
6	17205.00	15.57	52.58	74.00	-21.42	163	101	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11B 1M ANT1 2437MHz

Data: 64

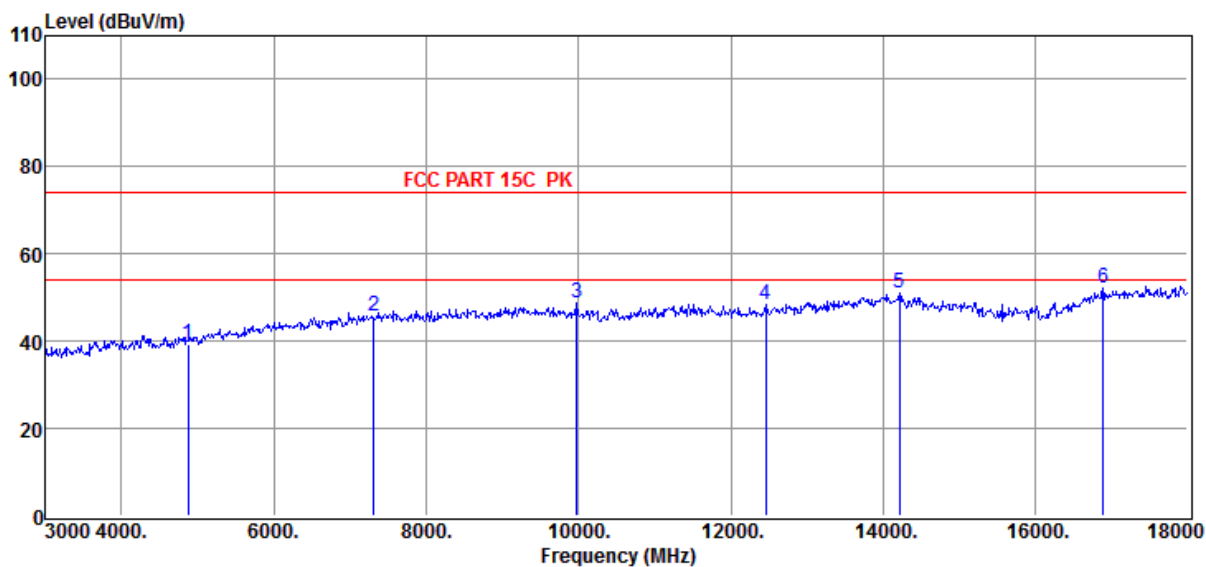

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4874.00	0.92	39.43	74.00	-34.57	165	231	Peak	HORIZONTAL
2	7311.00	6.34	45.85	74.00	-28.15	157	149	Peak	HORIZONTAL
3	9975.00	8.03	48.78	74.00	-25.22	161	275	Peak	HORIZONTAL
4	12465.00	9.35	48.30	74.00	-25.70	167	191	Peak	HORIZONTAL
5	14220.00	13.82	51.22	74.00	-22.78	163	241	Peak	HORIZONTAL
6	16890.00	14.93	52.30	74.00	-21.70	184	260	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11B 1M ANT1 2437MHz

Data: 65

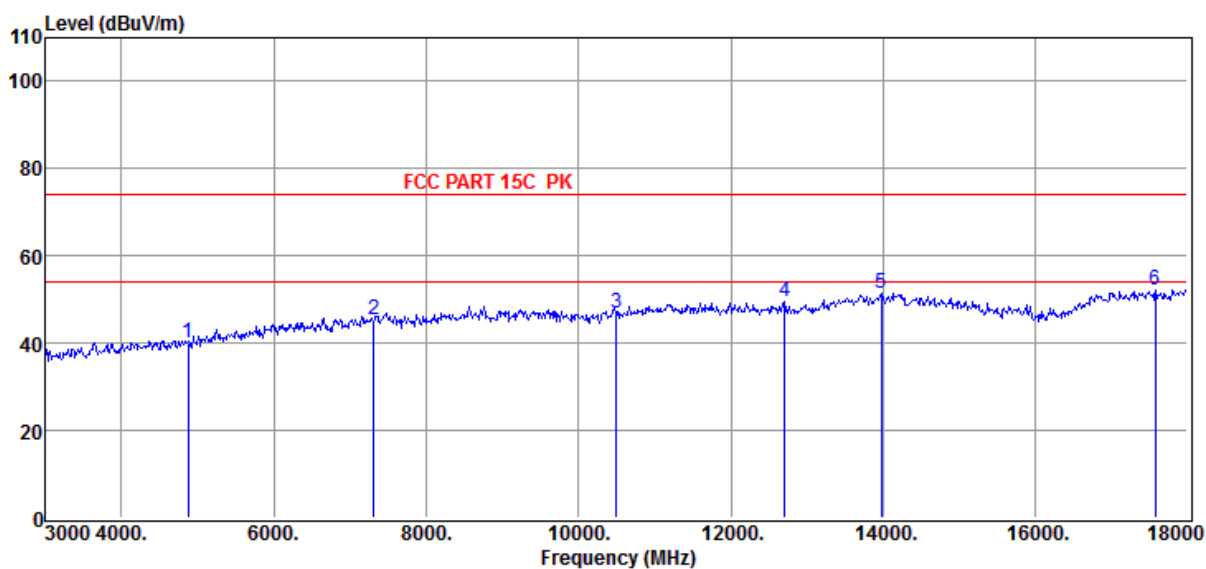

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4874.00	0.92	40.07	74.00	-33.93	185	139	Peak	VERTICAL
2	7311.00	6.34	45.33	74.00	-28.67	163	59	Peak	VERTICAL
3	10500.00	8.93	46.90	74.00	-27.10	163	337	Peak	VERTICAL
4	12705.00	9.87	49.67	74.00	-24.33	165	169	Peak	VERTICAL
5	13980.00	12.92	51.50	74.00	-22.50	157	243	Peak	VERTICAL
6	17580.00	15.46	52.25	74.00	-21.75	156	42	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11B 1M ANT1 2462MHz

Data: 66

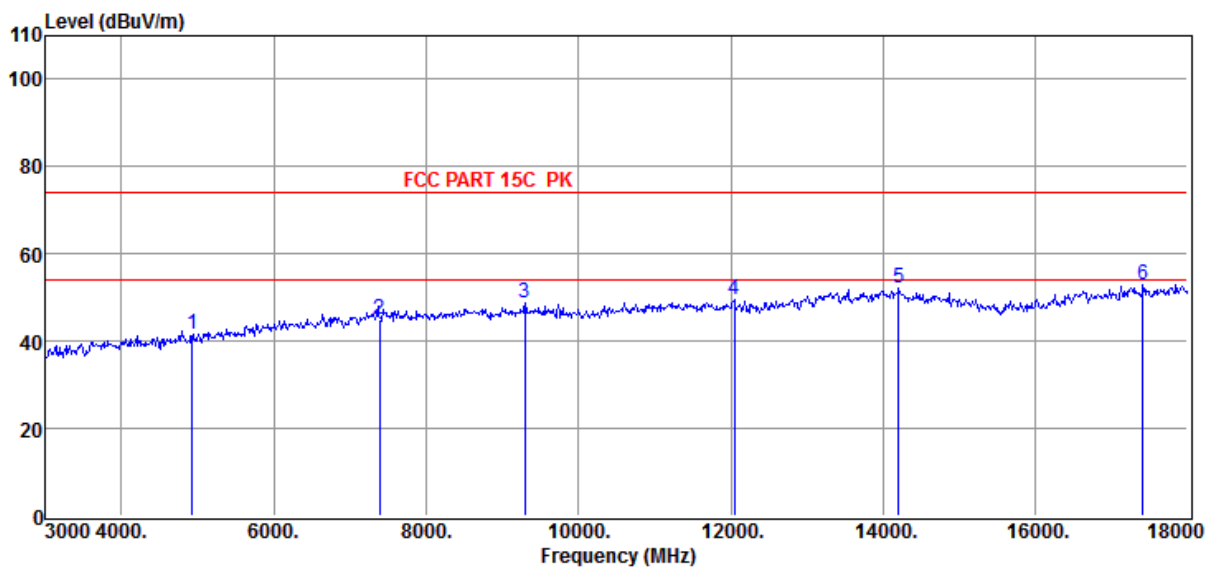

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4924.00	1.07	41.45	74.00	-32.55	170	352	Peak	VERTICAL
2	7386.00	6.24	44.89	74.00	-29.11	179	72	Peak	VERTICAL
3	9300.00	7.67	48.69	74.00	-25.31	177	24	Peak	VERTICAL
4	12045.00	9.84	49.55	74.00	-24.45	150	336	Peak	VERTICAL
5	14205.00	14.01	52.09	74.00	-21.91	158	163	Peak	VERTICAL
6	17415.00	15.59	52.77	74.00	-21.23	171	279	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11B 1M ANT1 2462MHz

Data: 67

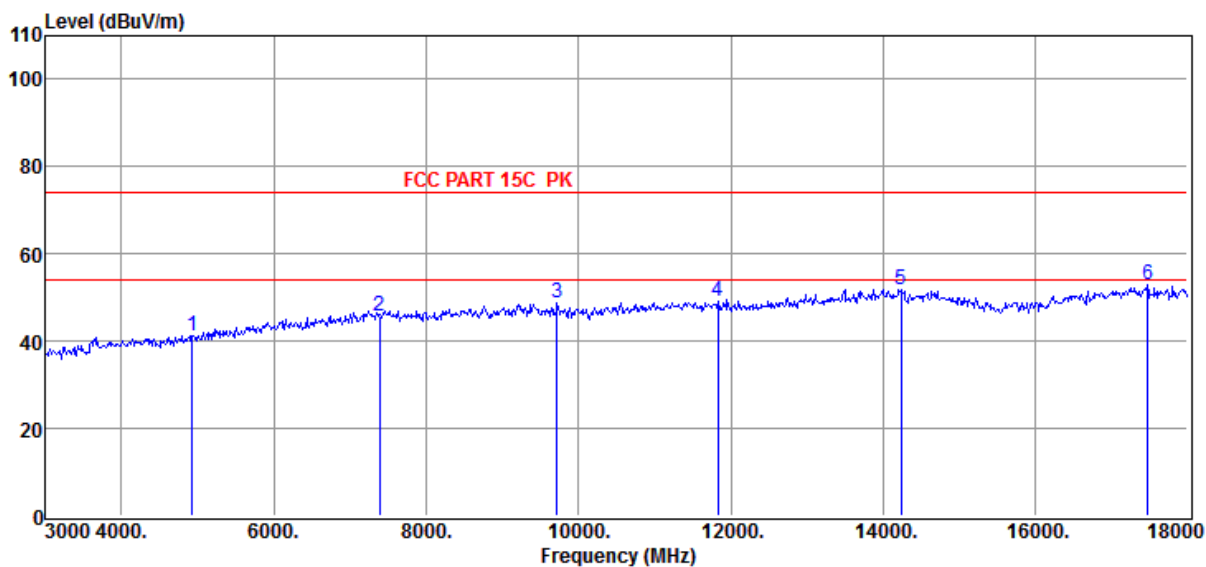

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4924.00	1.07	41.26	74.00	-32.74	184	207	Peak	HORIZONTAL
2	7386.00	6.24	45.77	74.00	-28.23	178	269	Peak	HORIZONTAL
3	9720.00	8.08	48.68	74.00	-25.32	161	218	Peak	HORIZONTAL
4	11835.00	10.01	49.17	74.00	-24.83	151	222	Peak	HORIZONTAL
5	14235.00	13.64	51.88	74.00	-22.12	176	109	Peak	HORIZONTAL
6	17475.00	15.60	53.08	74.00	-20.92	172	200	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11B 1M ANT2 2412MHz

Data: 68

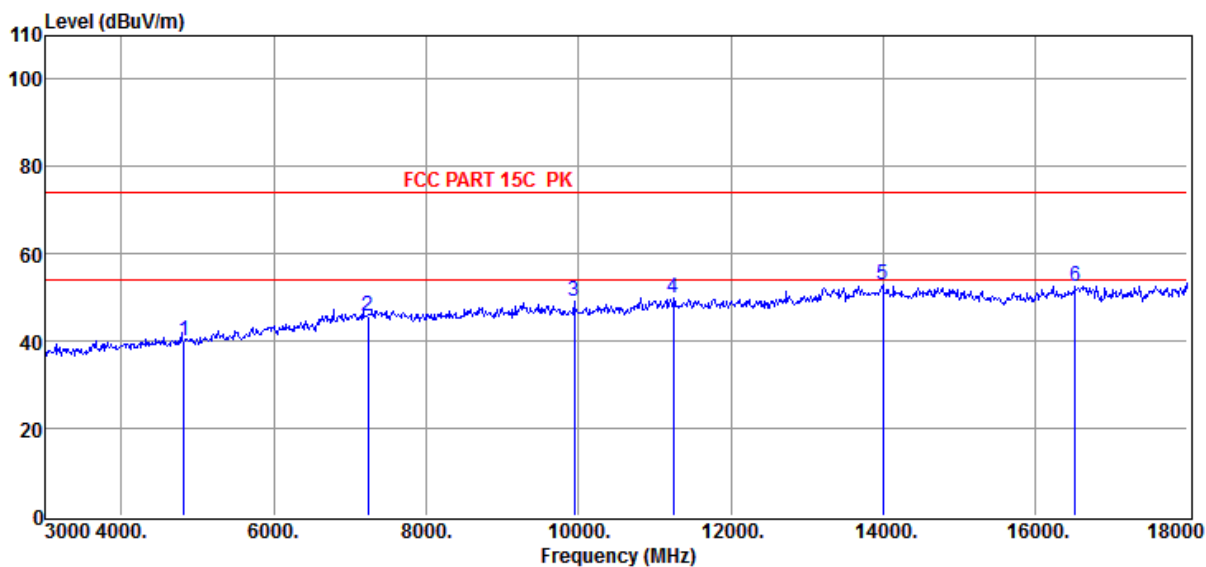

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4824.00	0.83	40.06	74.00	-33.94	170	190	Peak	VERTICAL
2	7236.00	6.19	45.79	74.00	-28.21	182	77	Peak	VERTICAL
3	9945.00	8.15	49.03	74.00	-24.97	159	298	Peak	VERTICAL
4	11250.00	10.25	50.05	74.00	-23.95	165	112	Peak	VERTICAL
5	13995.00	12.98	52.90	74.00	-21.10	170	70	Peak	VERTICAL
6	16530.00	13.34	52.67	74.00	-21.33	178	102	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11B 1M ANT2 2412MHz

Data: 69

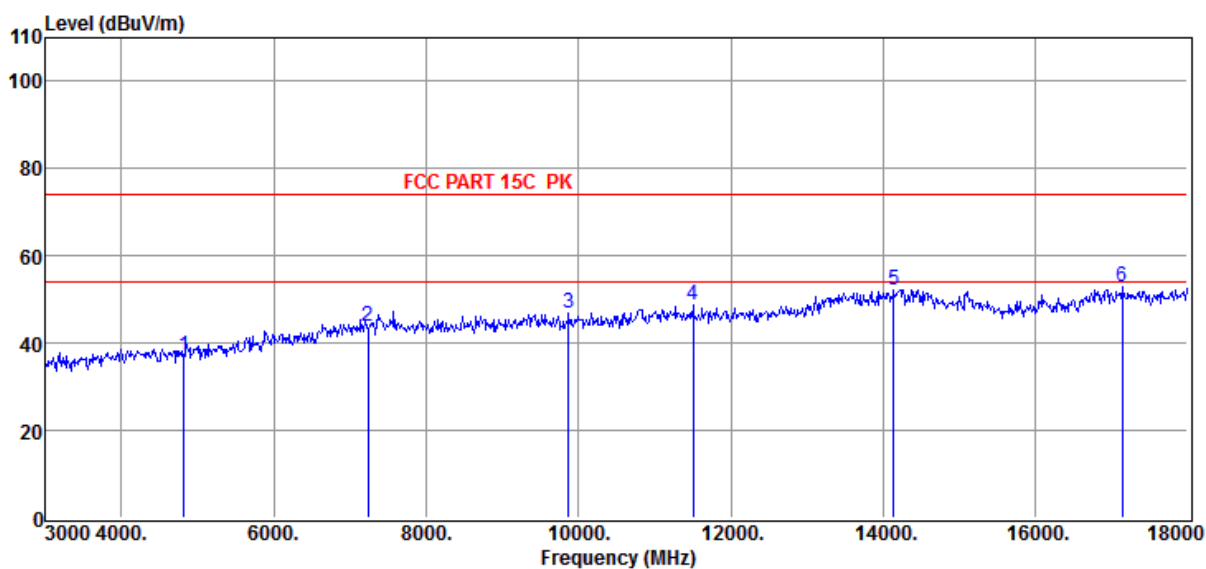

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4824.00	0.83	37.14	74.00	-36.86	169	88	Peak	HORIZONTAL
2	7236.00	6.19	43.77	74.00	-30.23	151	159	Peak	HORIZONTAL
3	9870.00	8.24	46.91	74.00	-27.09	169	134	Peak	HORIZONTAL
4	11505.00	10.09	48.60	74.00	-25.40	153	59	Peak	HORIZONTAL
5	14145.00	13.52	52.28	74.00	-21.72	177	178	Peak	HORIZONTAL
6	17145.00	15.55	53.01	74.00	-20.99	173	319	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11B 1M ANT2 2437MHz

Data: 70

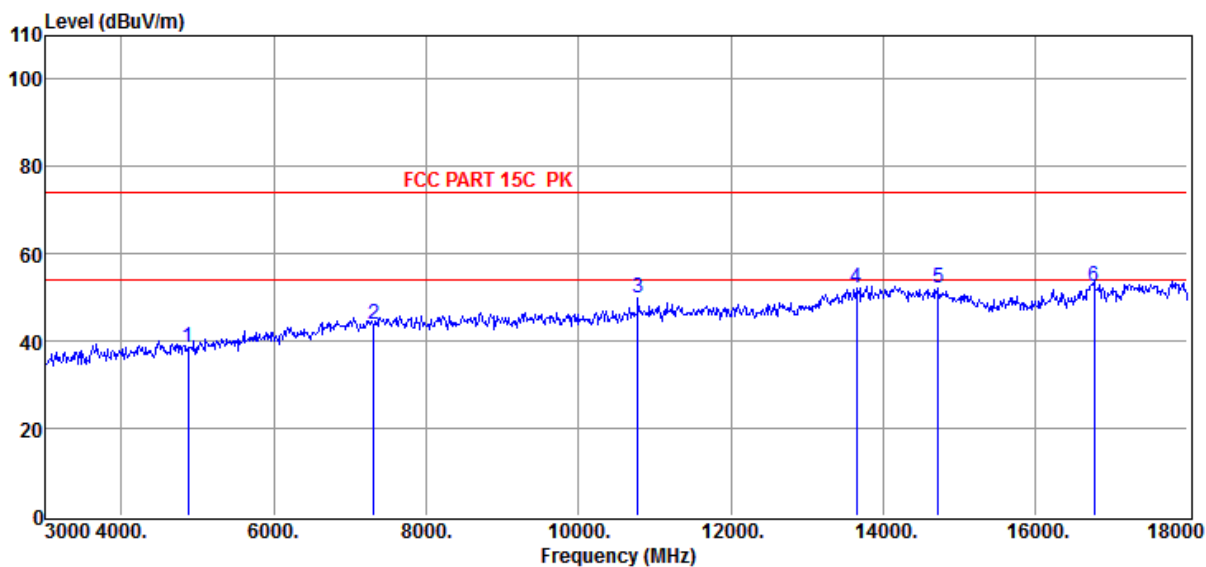

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4874.00	0.92	38.38	74.00	-35.62	183	88	Peak	HORIZONTAL
2	7311.00	6.34	43.85	74.00	-30.15	176	332	Peak	HORIZONTAL
3	10785.00	9.56	50.06	74.00	-23.94	162	52	Peak	HORIZONTAL
4	13650.00	11.68	52.25	74.00	-21.75	171	317	Peak	HORIZONTAL
5	14730.00	12.62	52.22	74.00	-21.78	171	212	Peak	HORIZONTAL
6	16770.00	15.08	52.52	74.00	-21.48	171	275	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11B 1M ANT2 2437MHz

Data: 71

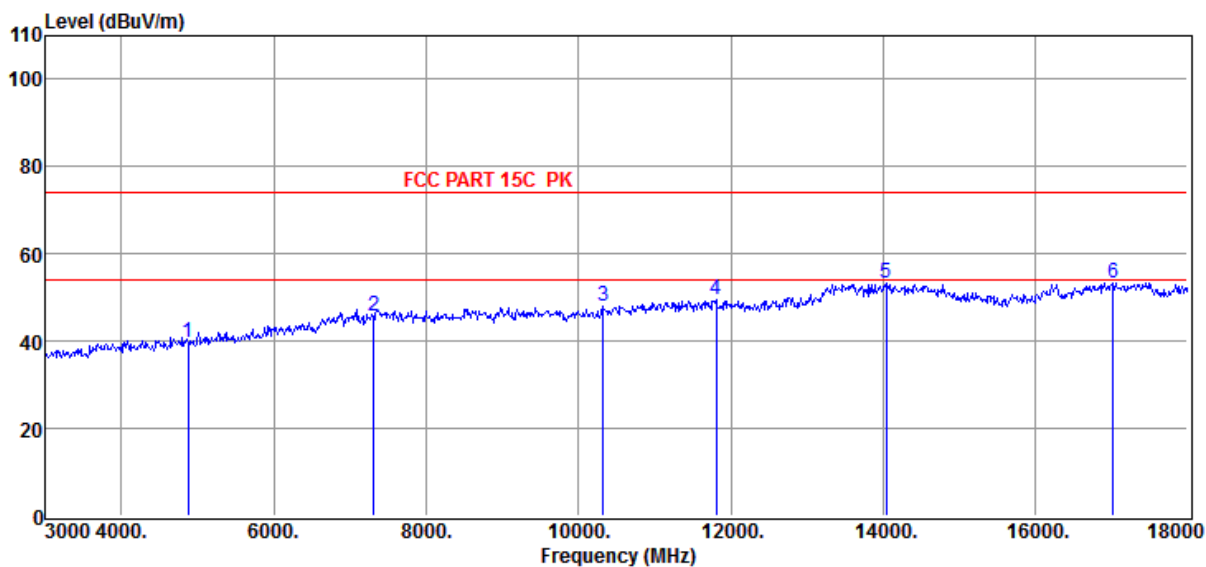

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4874.00	0.92	39.72	74.00	-34.28	162	9	Peak	VERTICAL
2	7311.00	6.34	45.72	74.00	-28.28	182	62	Peak	VERTICAL
3	10320.00	8.67	48.07	74.00	-25.93	172	239	Peak	VERTICAL
4	11805.00	10.02	49.46	74.00	-24.54	183	107	Peak	VERTICAL
5	14040.00	13.02	53.25	74.00	-20.75	159	168	Peak	VERTICAL
6	17025.00	16.14	53.38	74.00	-20.62	152	102	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11B 1M ANT2 2462MHz

Data: 72

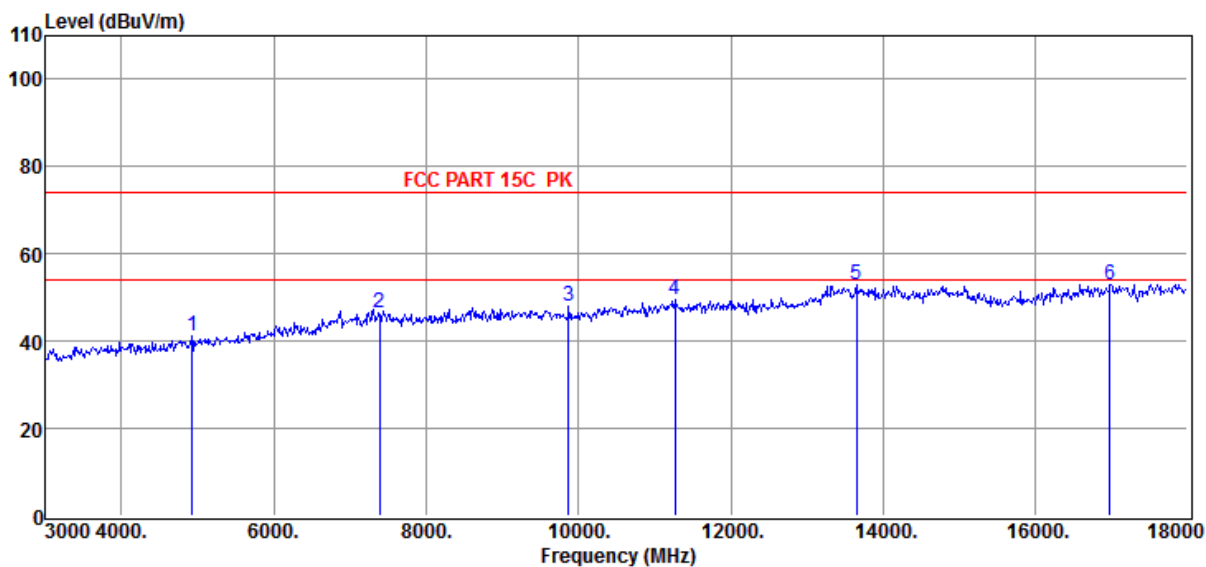

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4924.00	1.07	41.31	74.00	-32.69	167	273	Peak	VERTICAL
2	7386.00	6.24	46.35	74.00	-27.65	154	216	Peak	VERTICAL
3	9870.00	8.24	47.95	74.00	-26.05	179	255	Peak	VERTICAL
4	11265.00	10.20	49.39	74.00	-24.61	151	23	Peak	VERTICAL
5	13650.00	11.68	52.97	74.00	-21.03	155	58	Peak	VERTICAL
6	16980.00	16.03	52.93	74.00	-21.07	154	2	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11B 1M ANT2 2462MHz

Data: 73

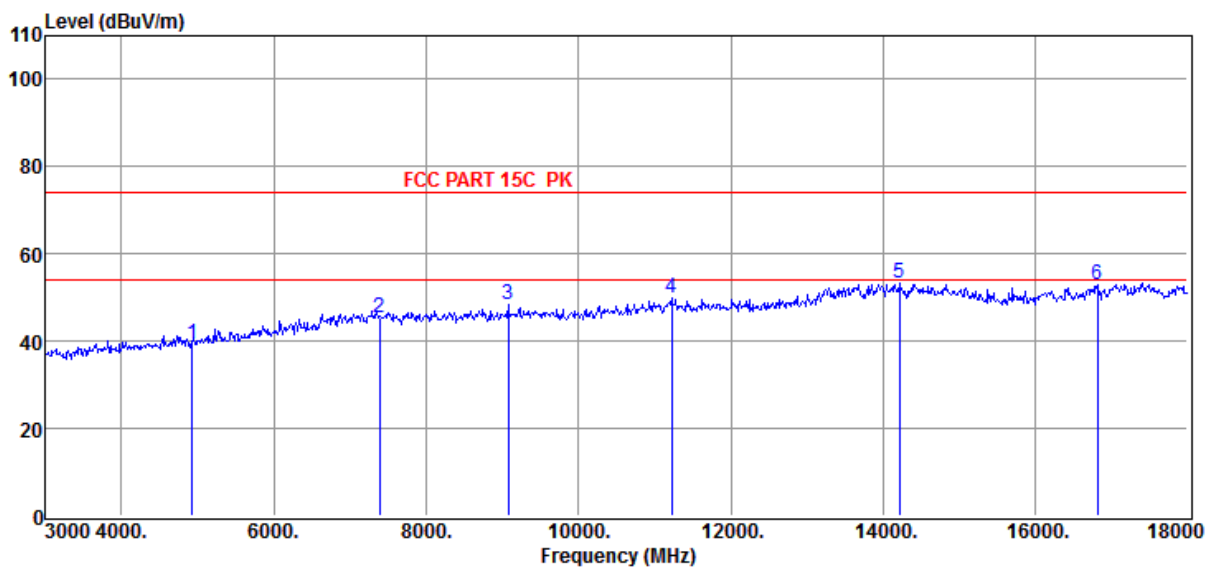

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4924.00	1.07	39.21	74.00	-34.79	150	135	Peak	HORIZONTAL
2	7386.00	6.24	45.46	74.00	-28.54	159	177	Peak	HORIZONTAL
3	9075.00	7.08	48.23	74.00	-25.77	171	86	Peak	HORIZONTAL
4	11220.00	10.34	49.79	74.00	-24.21	158	152	Peak	HORIZONTAL
5	14220.00	13.82	53.33	74.00	-20.67	170	43	Peak	HORIZONTAL
6	16815.00	15.35	52.75	74.00	-21.25	154	277	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11G 6M ANT1 2412MHz

Data: 74

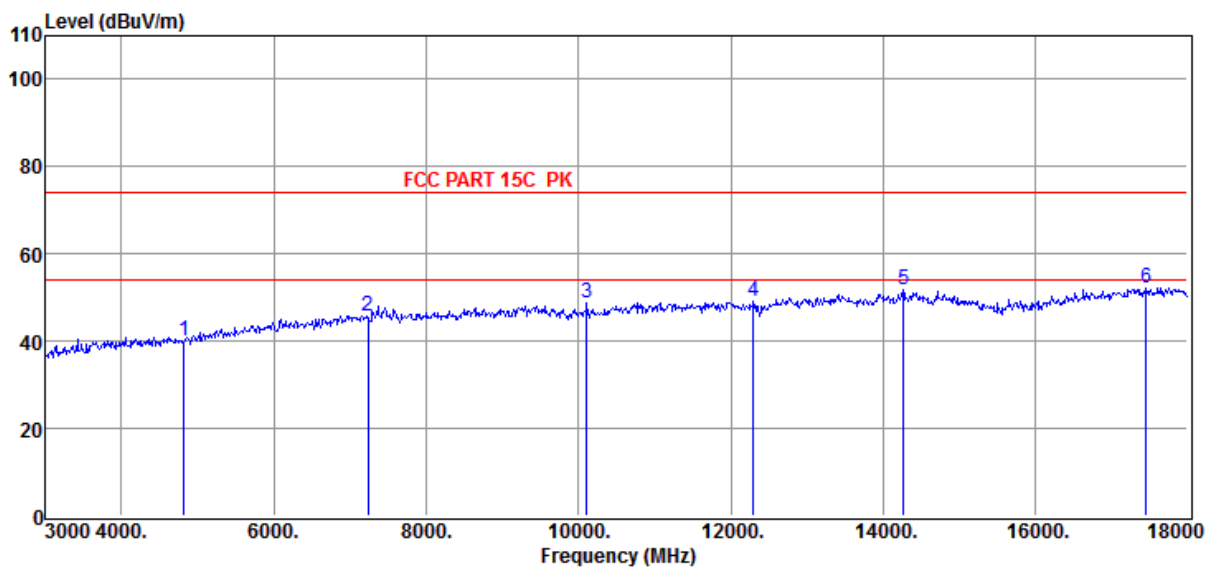

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4824.00	0.83	40.03	74.00	-33.97	163	340	Peak	HORIZONTAL
2	7236.00	6.19	45.81	74.00	-28.19	174	218	Peak	HORIZONTAL
3	10110.00	8.65	48.81	74.00	-25.19	153	321	Peak	HORIZONTAL
4	12300.00	9.26	49.06	74.00	-24.94	185	354	Peak	HORIZONTAL
5	14265.00	13.28	51.83	74.00	-22.17	176	300	Peak	HORIZONTAL
6	17460.00	15.59	52.04	74.00	-21.96	171	70	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11G 6M ANT1 2412MHz

Data: 75

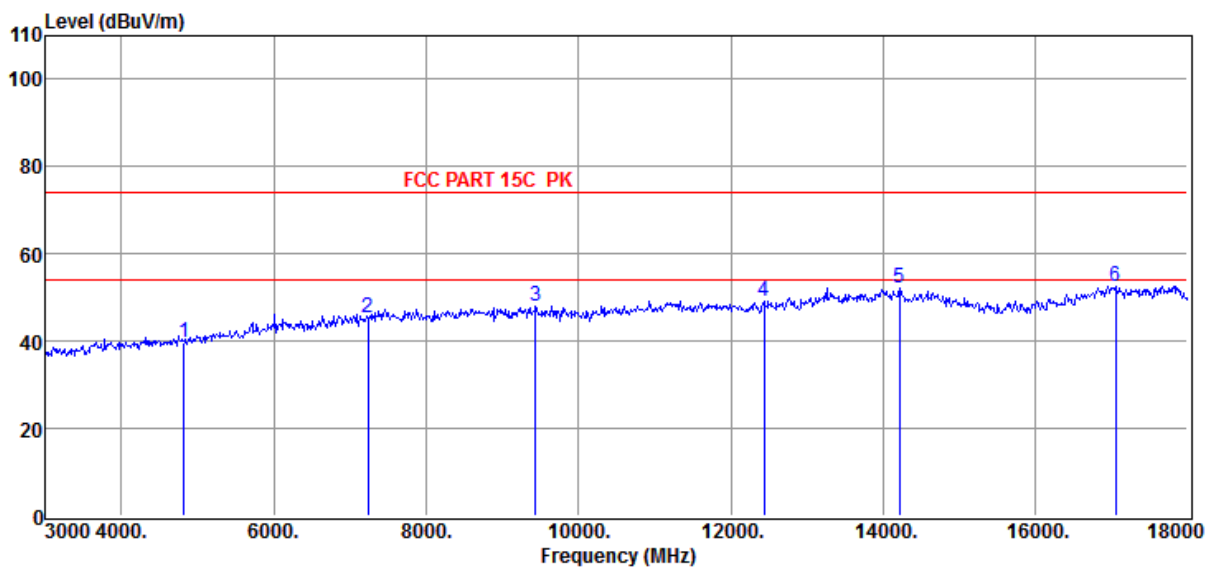

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4824.00	0.83	39.80	74.00	-34.20	178	182	Peak	VERTICAL
2	7236.00	6.19	45.40	74.00	-28.60	172	283	Peak	VERTICAL
3	9435.00	8.05	47.94	74.00	-26.06	167	353	Peak	VERTICAL
4	12435.00	9.54	49.22	74.00	-24.78	176	165	Peak	VERTICAL
5	14220.00	13.82	51.98	74.00	-22.02	176	65	Peak	VERTICAL
6	17055.00	15.90	52.52	74.00	-21.48	165	98	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11G 6M ANT1 2437MHz

Data: 76

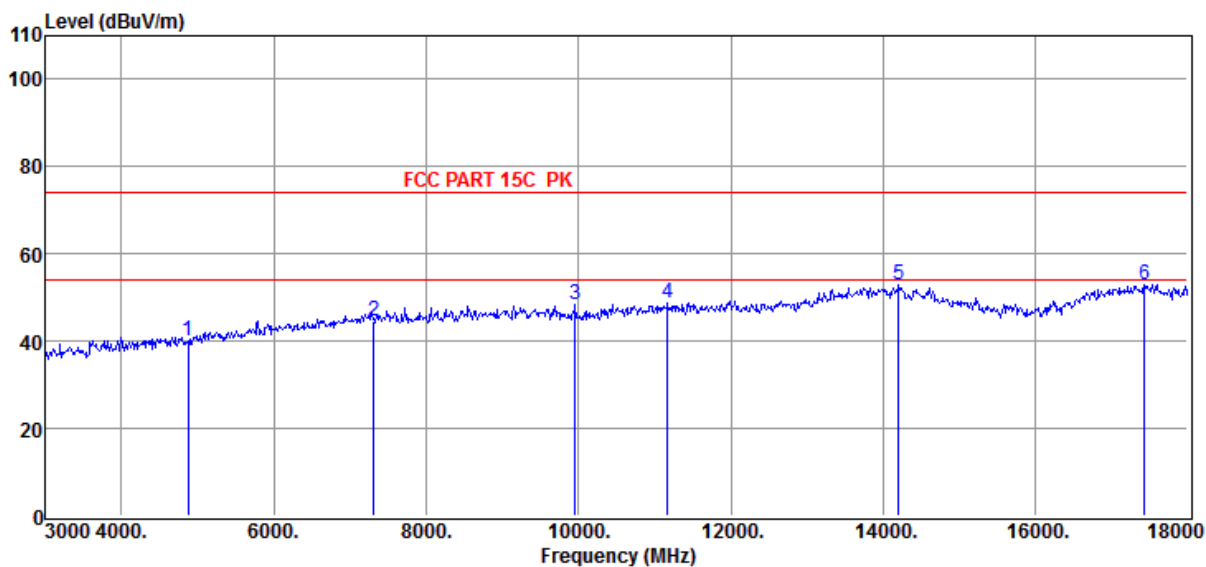

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4874.00	0.92	40.12	74.00	-33.88	159	172	Peak	VERTICAL
2	7311.00	6.34	44.74	74.00	-29.26	170	96	Peak	VERTICAL
3	9960.00	8.09	48.44	74.00	-25.56	175	80	Peak	VERTICAL
4	11175.00	10.30	48.64	74.00	-25.36	166	169	Peak	VERTICAL
5	14205.00	14.01	52.77	74.00	-21.23	172	202	Peak	VERTICAL
6	17430.00	15.59	52.83	74.00	-21.17	183	258	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11G 6M ANT1 2437MHz

Data: 77

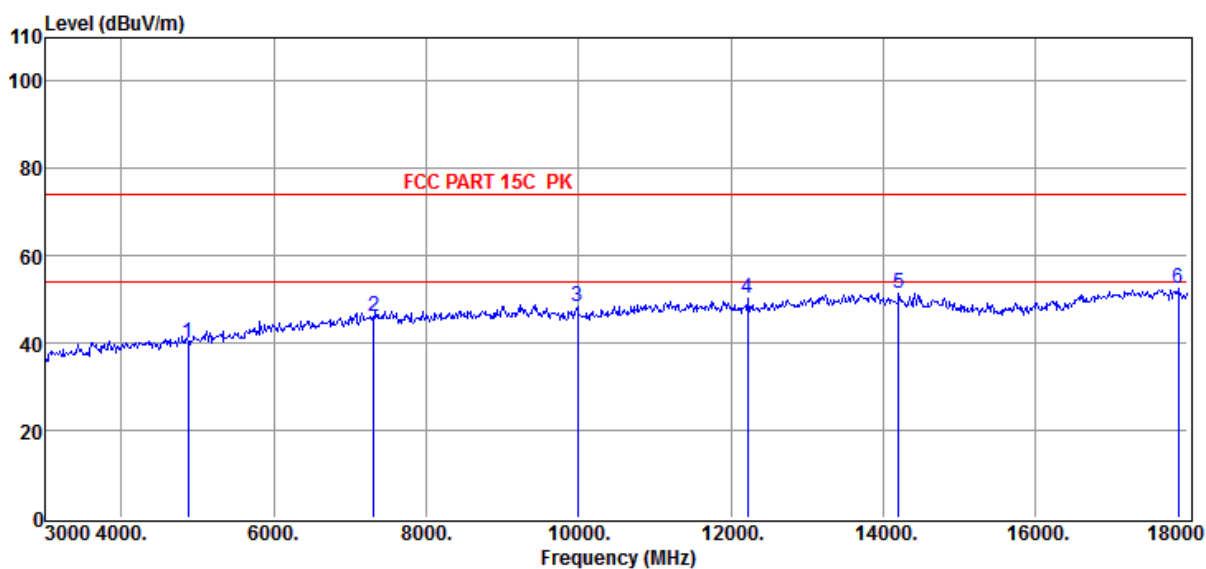

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4874.00	0.92	40.23	74.00	-33.77	174	322	Peak	HORIZONTAL
2	7311.00	6.34	45.96	74.00	-28.04	153	51	Peak	HORIZONTAL
3	9990.00	7.98	48.45	74.00	-25.55	159	62	Peak	HORIZONTAL
4	12225.00	9.58	50.15	74.00	-23.85	182	275	Peak	HORIZONTAL
5	14205.00	14.01	51.47	74.00	-22.53	168	108	Peak	HORIZONTAL
6	17880.00	15.28	52.48	74.00	-21.52	153	248	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11G 6M ANT1 2462MHz

Data: 78

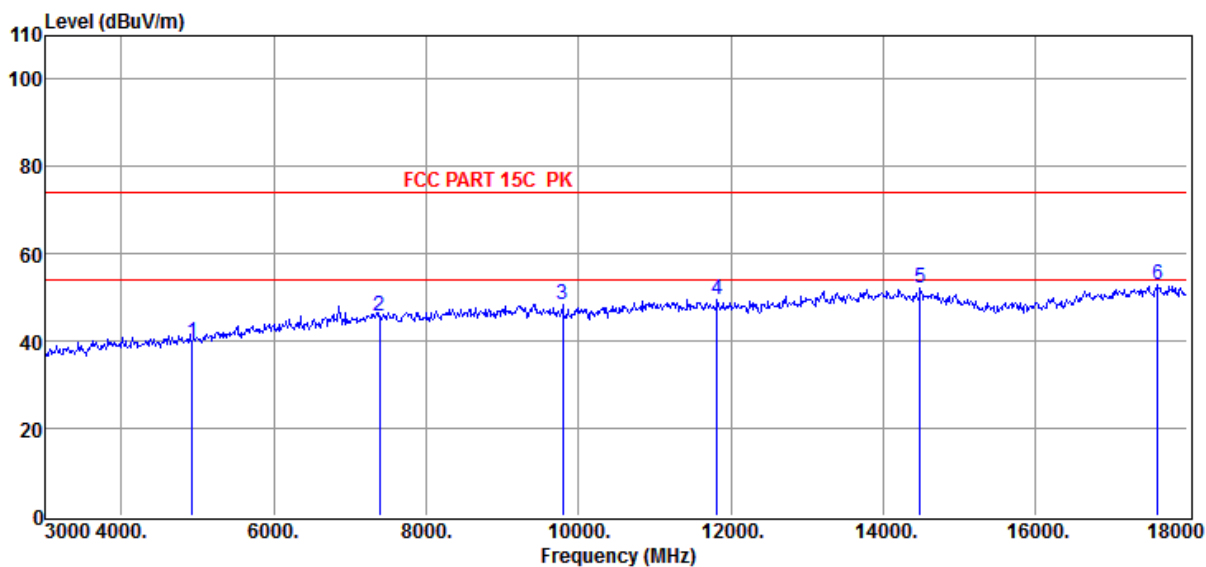

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4924.00	1.07	39.65	74.00	-34.35	151	360	Peak	HORIZONTAL
2	7386.00	6.24	45.70	74.00	-28.30	173	296	Peak	HORIZONTAL
3	9795.00	8.11	48.35	74.00	-25.65	170	239	Peak	HORIZONTAL
4	11820.00	10.02	49.45	74.00	-24.55	181	178	Peak	HORIZONTAL
5	14490.00	12.93	52.10	74.00	-21.90	184	113	Peak	HORIZONTAL
6	17610.00	15.36	52.96	74.00	-21.04	155	128	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11G 6M ANT1 2462MHz

Data: 79

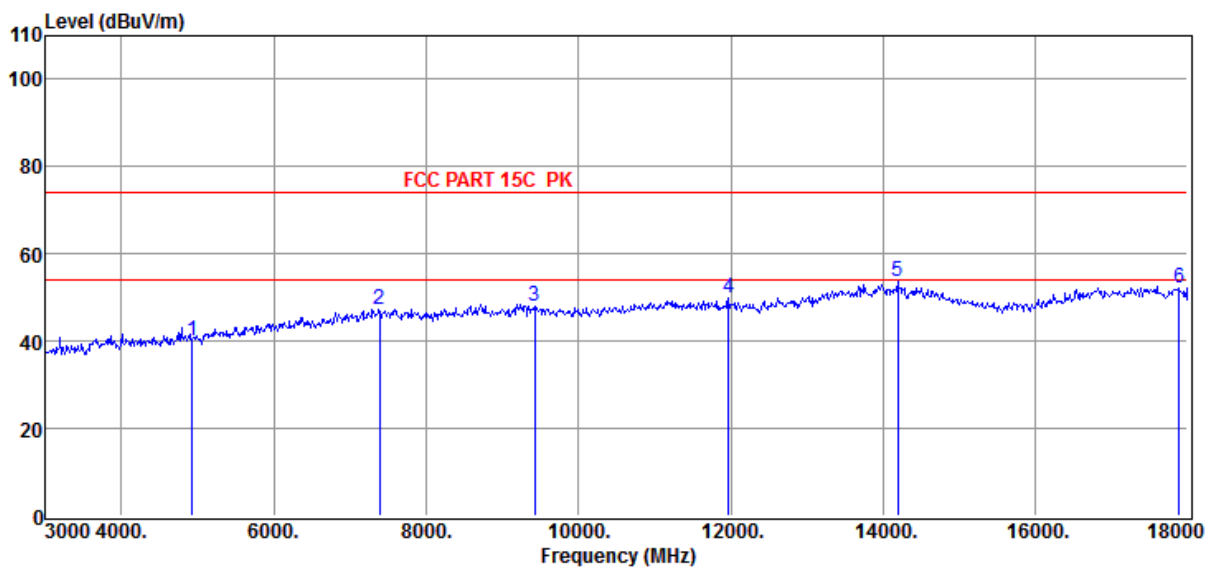

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4924.00	1.07	40.11	74.00	-33.89	159	328	Peak	VERTICAL
2	7386.00	6.24	47.09	74.00	-26.91	160	228	Peak	VERTICAL
3	9420.00	8.11	48.17	74.00	-25.83	177	82	Peak	VERTICAL
4	11970.00	9.88	50.00	74.00	-24.00	158	280	Peak	VERTICAL
5	14190.00	13.97	53.63	74.00	-20.37	168	205	Peak	VERTICAL
6	17895.00	15.27	52.27	74.00	-21.73	183	206	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11G 6M ANT2 2412MHz

Data: 80

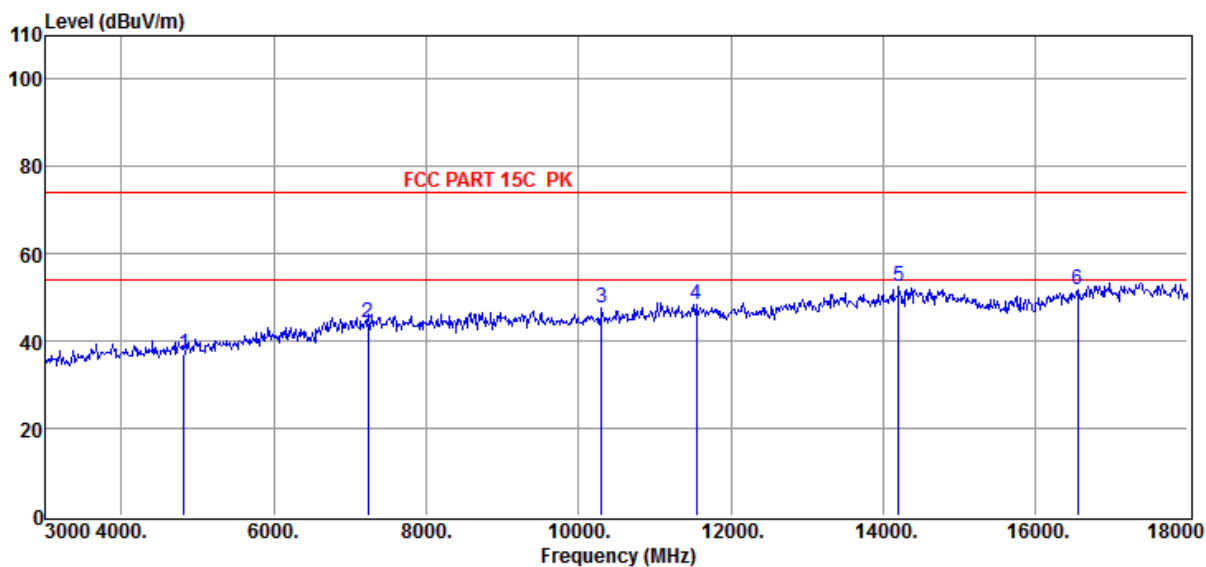

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4824.00	0.83	37.06	74.00	-36.94	179	122	Peak	VERTICAL
2	7236.00	6.19	44.22	74.00	-29.78	182	124	Peak	VERTICAL
3	10305.00	8.64	47.69	74.00	-26.31	176	282	Peak	VERTICAL
4	11550.00	10.07	48.34	74.00	-25.66	185	252	Peak	VERTICAL
5	14205.00	14.01	52.63	74.00	-21.37	155	41	Peak	VERTICAL
6	16560.00	13.63	51.70	74.00	-22.30	154	115	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11G 6M ANT2 2412MHz

Data: 81

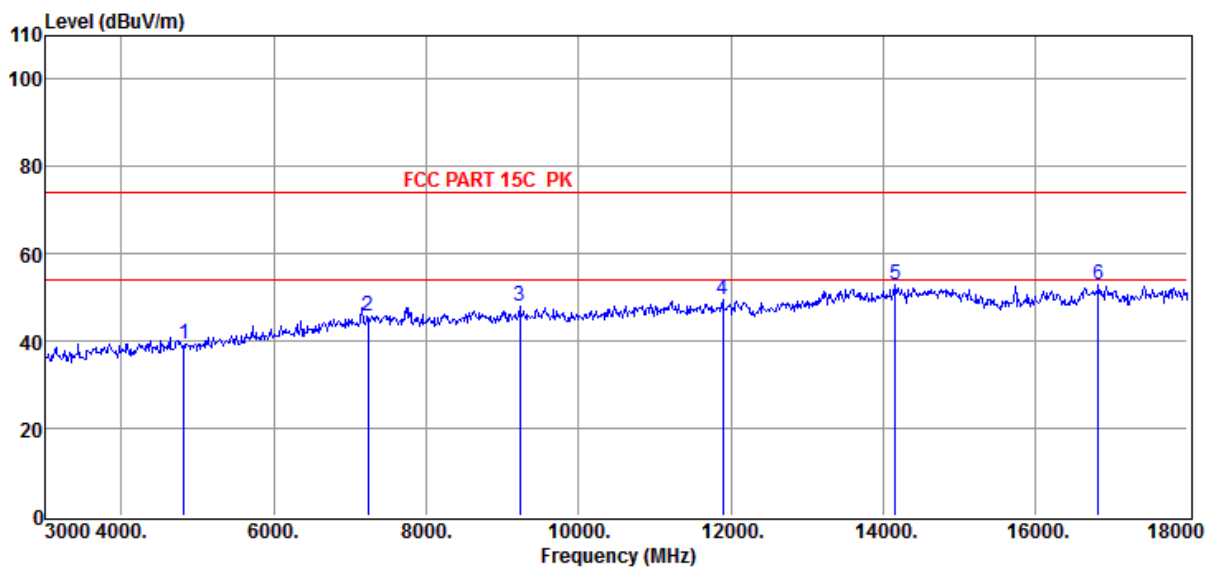

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4824.00	0.83	39.20	74.00	-34.80	171	127	Peak	HORIZONTAL
2	7236.00	6.19	45.60	74.00	-28.40	185	336	Peak	HORIZONTAL
3	9225.00	7.37	47.87	74.00	-26.13	178	324	Peak	HORIZONTAL
4	11895.00	10.01	49.33	74.00	-24.67	159	11	Peak	HORIZONTAL
5	14160.00	13.67	53.08	74.00	-20.92	180	3	Peak	HORIZONTAL
6	16830.00	15.27	52.89	74.00	-21.11	164	82	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11G 6M ANT2 2437MHz

Data: 82

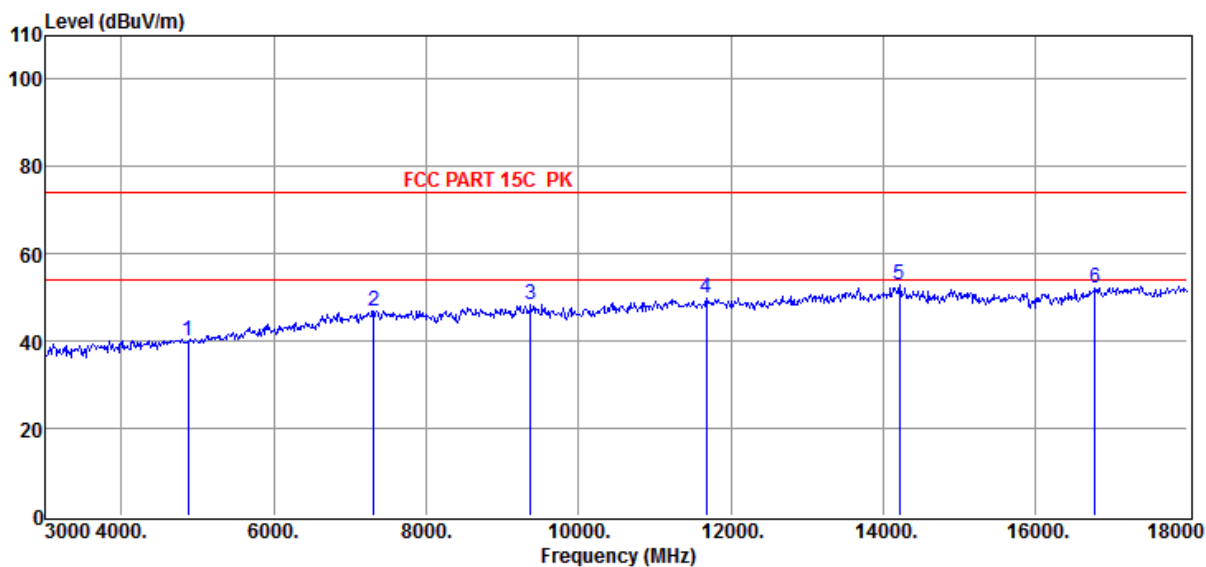

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4874.00	0.92	39.98	74.00	-34.02	154	286	Peak	VERTICAL
2	7311.00	6.34	46.79	74.00	-27.21	155	107	Peak	VERTICAL
3	9375.00	8.06	48.36	74.00	-25.64	153	57	Peak	VERTICAL
4	11685.00	10.03	50.00	74.00	-24.00	174	25	Peak	VERTICAL
5	14220.00	13.82	53.02	74.00	-20.98	170	214	Peak	VERTICAL
6	16785.00	15.26	52.05	74.00	-21.95	159	14	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11G 6M ANT2 2437MHz

Data: 83

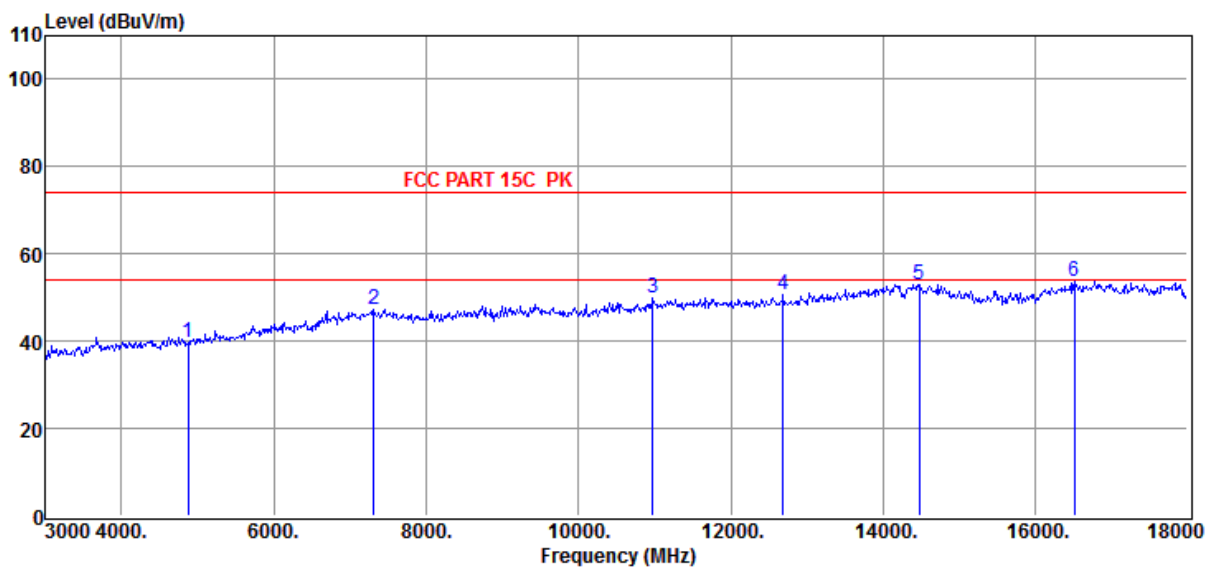

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4874.00	0.92	39.63	74.00	-34.37	154	116	Peak	HORIZONTAL
2	7311.00	6.34	47.09	74.00	-26.91	180	328	Peak	HORIZONTAL
3	10980.00	9.78	49.95	74.00	-24.05	164	218	Peak	HORIZONTAL
4	12690.00	9.87	50.52	74.00	-23.48	175	249	Peak	HORIZONTAL
5	14475.00	13.09	52.97	74.00	-21.03	183	297	Peak	HORIZONTAL
6	16515.00	13.20	53.51	74.00	-20.49	163	238	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11G 6M ANT2 2462MHz

Data: 84

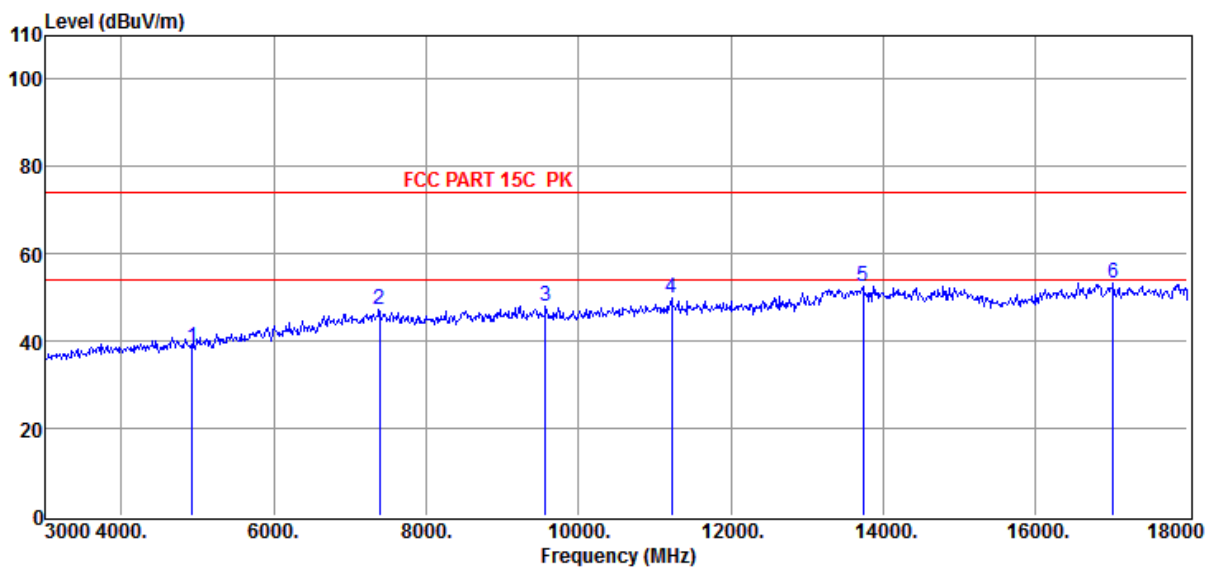

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4924.00	1.07	38.69	74.00	-35.31	173	236	Peak	HORIZONTAL
2	7386.00	6.24	47.26	74.00	-26.74	184	279	Peak	HORIZONTAL
3	9570.00	7.99	47.88	74.00	-26.12	163	1	Peak	HORIZONTAL
4	11220.00	10.34	49.95	74.00	-24.05	151	288	Peak	HORIZONTAL
5	13740.00	11.94	52.49	74.00	-21.51	161	243	Peak	HORIZONTAL
6	17025.00	16.14	53.21	74.00	-20.79	174	202	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11G 6M ANT2 2462MHz

Data: 85

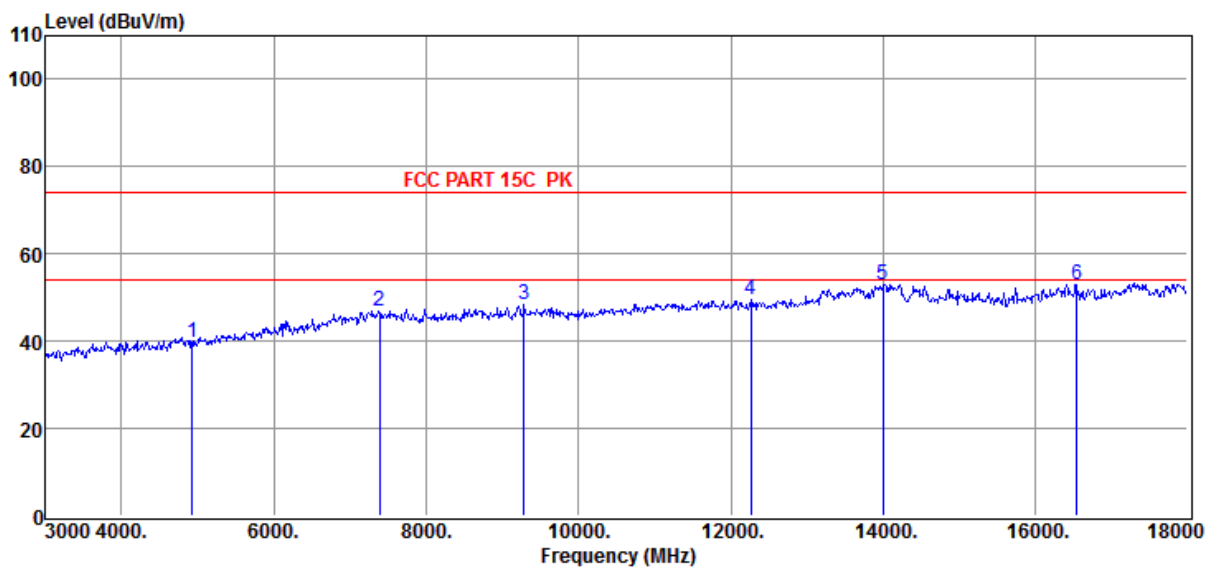

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4924.00	1.07	39.87	74.00	-34.13	153	337	Peak	VERTICAL
2	7386.00	6.24	46.92	74.00	-27.08	155	272	Peak	VERTICAL
3	9285.00	7.61	48.33	74.00	-25.67	152	254	Peak	VERTICAL
4	12270.00	9.39	49.62	74.00	-24.38	150	276	Peak	VERTICAL
5	13995.00	12.98	52.98	74.00	-21.02	158	11	Peak	VERTICAL
6	16545.00	13.49	52.99	74.00	-21.01	185	8	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 2412MHz

Data: 86

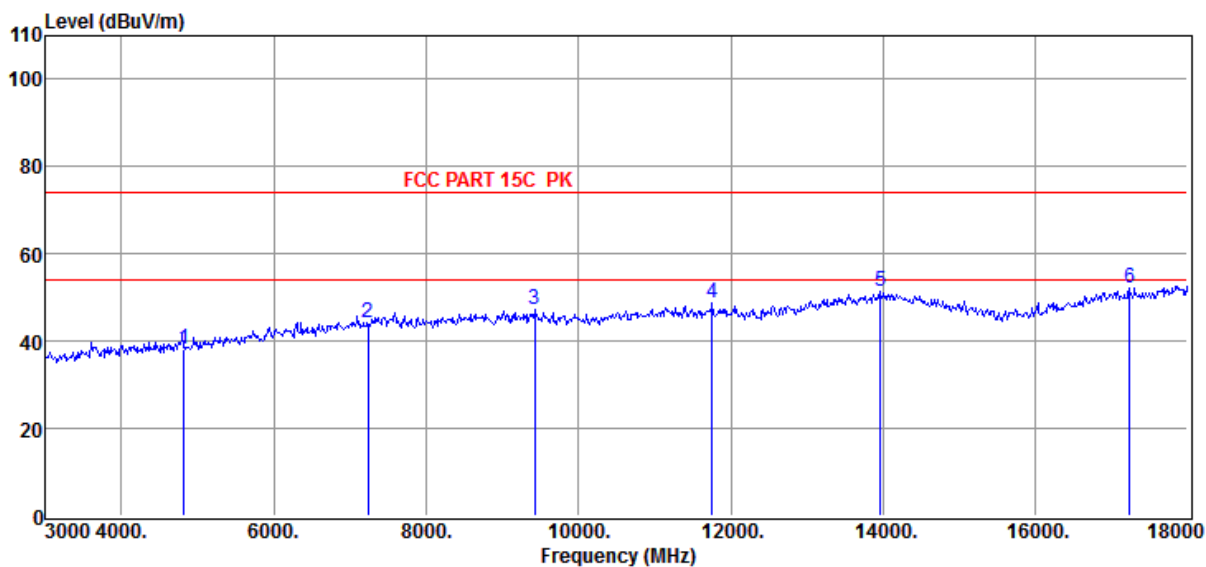

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4824.00	0.83	38.27	74.00	-35.73	171	327	Peak	VERTICAL
2	7236.00	6.19	44.40	74.00	-29.60	175	222	Peak	VERTICAL
3	9420.00	8.11	47.08	74.00	-26.92	167	22	Peak	VERTICAL
4	11760.00	10.03	48.89	74.00	-25.11	185	308	Peak	VERTICAL
5	13965.00	12.85	51.31	74.00	-22.69	174	312	Peak	VERTICAL
6	17235.00	15.65	52.00	74.00	-22.00	173	347	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 2412MHz

Data: 87

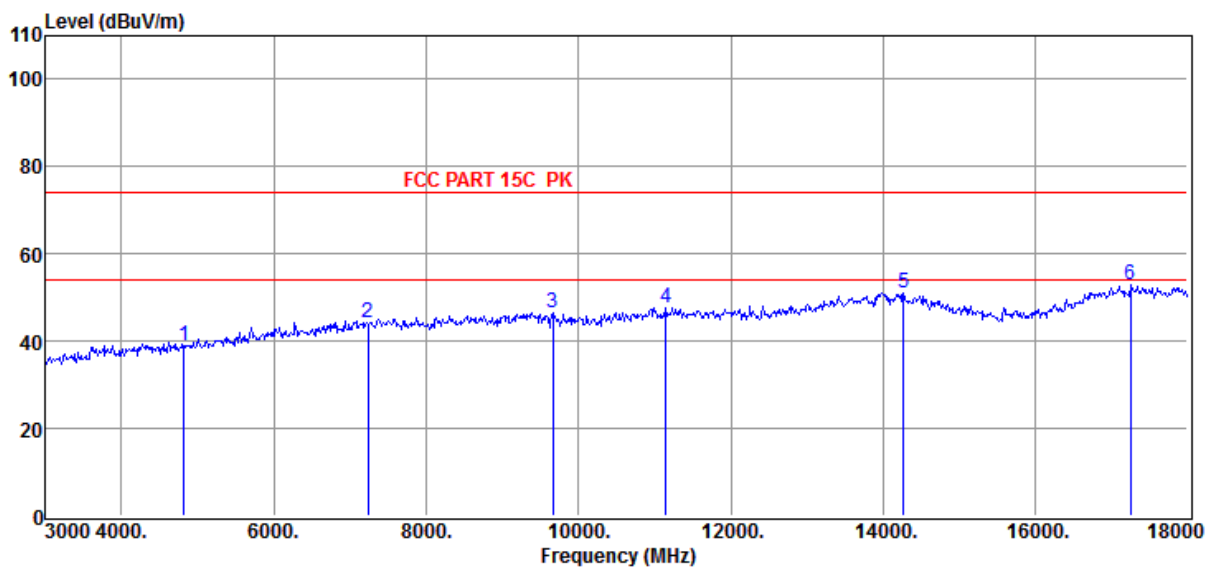

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4824.00	0.83	39.00	74.00	-35.00	152	198	Peak	HORIZONTAL
2	7236.00	6.19	44.32	74.00	-29.68	160	117	Peak	HORIZONTAL
3	9660.00	8.08	46.57	74.00	-27.43	151	177	Peak	HORIZONTAL
4	11145.00	10.19	47.76	74.00	-26.24	154	133	Peak	HORIZONTAL
5	14265.00	13.28	51.09	74.00	-22.91	150	31	Peak	HORIZONTAL
6	17250.00	15.69	52.95	74.00	-21.05	180	84	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 2437MHz

Data: 88

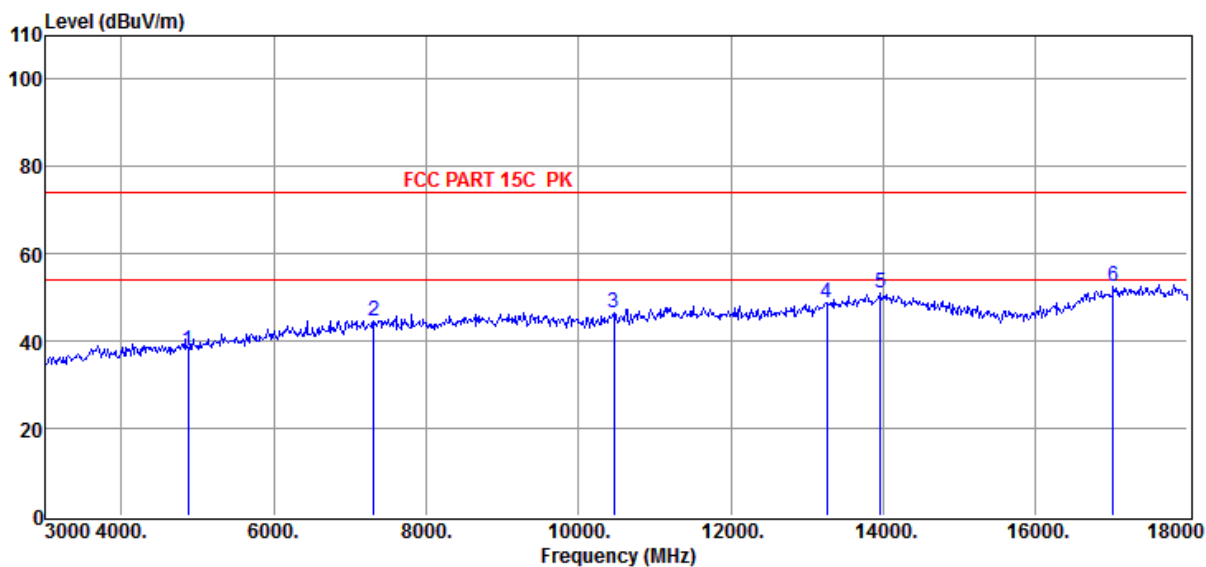

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4874.00	0.92	37.78	74.00	-36.22	169	285	Peak	HORIZONTAL
2	7311.00	6.34	44.52	74.00	-29.48	175	122	Peak	HORIZONTAL
3	10470.00	8.91	46.39	74.00	-27.61	156	216	Peak	HORIZONTAL
4	13260.00	10.66	48.93	74.00	-25.07	159	281	Peak	HORIZONTAL
5	13965.00	12.85	51.15	74.00	-22.85	172	90	Peak	HORIZONTAL
6	17025.00	16.14	52.41	74.00	-21.59	174	288	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 2437MHz

Data: 89

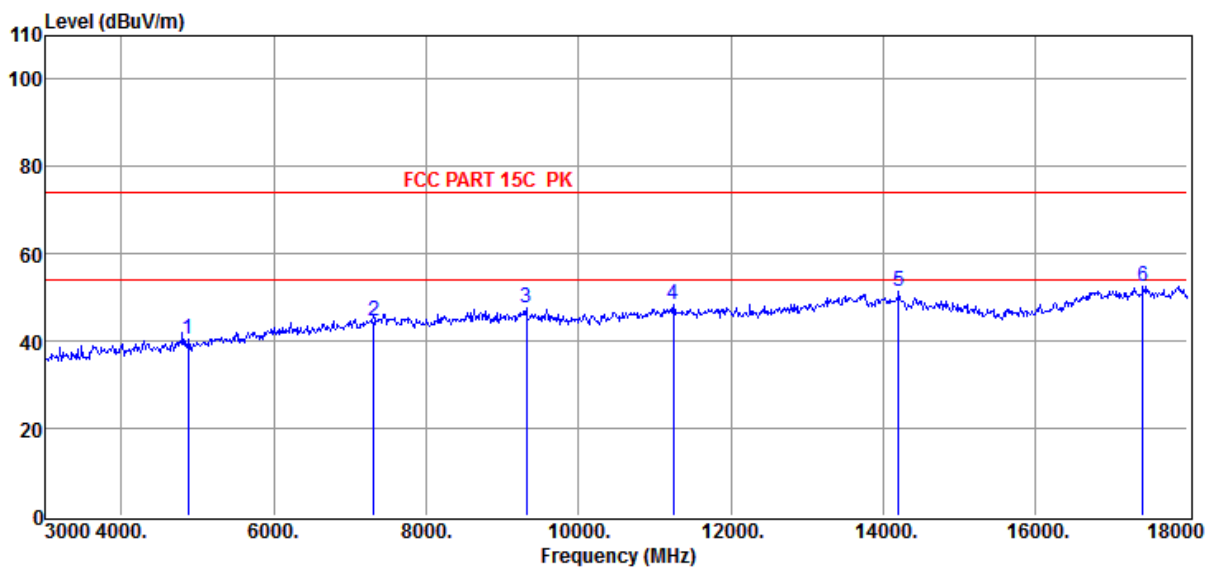

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4874.00	0.92	40.29	74.00	-33.71	166	301	Peak	VERTICAL
2	7311.00	6.34	44.62	74.00	-29.38	181	198	Peak	VERTICAL
3	9315.00	7.75	47.75	74.00	-26.25	167	282	Peak	VERTICAL
4	11250.00	10.25	48.26	74.00	-25.74	156	331	Peak	VERTICAL
5	14205.00	14.01	51.44	74.00	-22.56	180	39	Peak	VERTICAL
6	17415.00	15.59	52.61	74.00	-21.39	182	145	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N20 MCS8 ANT1+ANT2 2462MHz

Data: 90

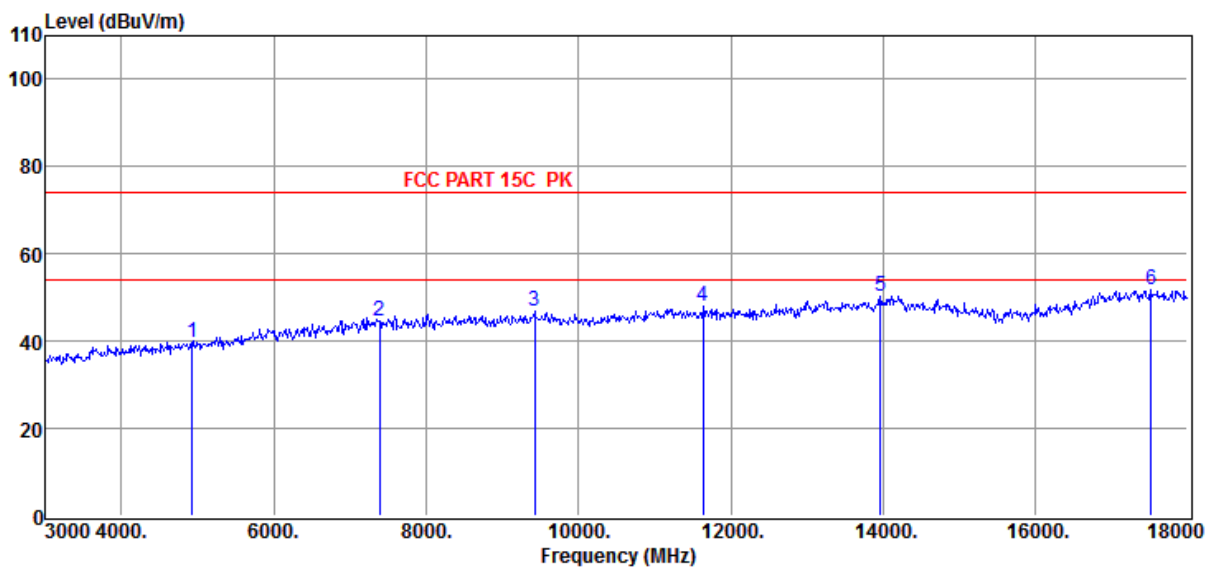

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4924.00	1.07	39.54	74.00	-34.46	152	293	Peak	VERTICAL
2	7386.00	6.24	44.64	74.00	-29.36	176	72	Peak	VERTICAL
3	9420.00	8.11	46.77	74.00	-27.23	175	138	Peak	VERTICAL
4	11640.00	10.05	48.03	74.00	-25.97	177	195	Peak	VERTICAL
5	13965.00	12.85	50.28	74.00	-23.72	161	286	Peak	VERTICAL
6	17520.00	15.56	51.61	74.00	-22.39	151	306	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N20 MCS8 ANT1+ANT2 2462MHz

Data: 91

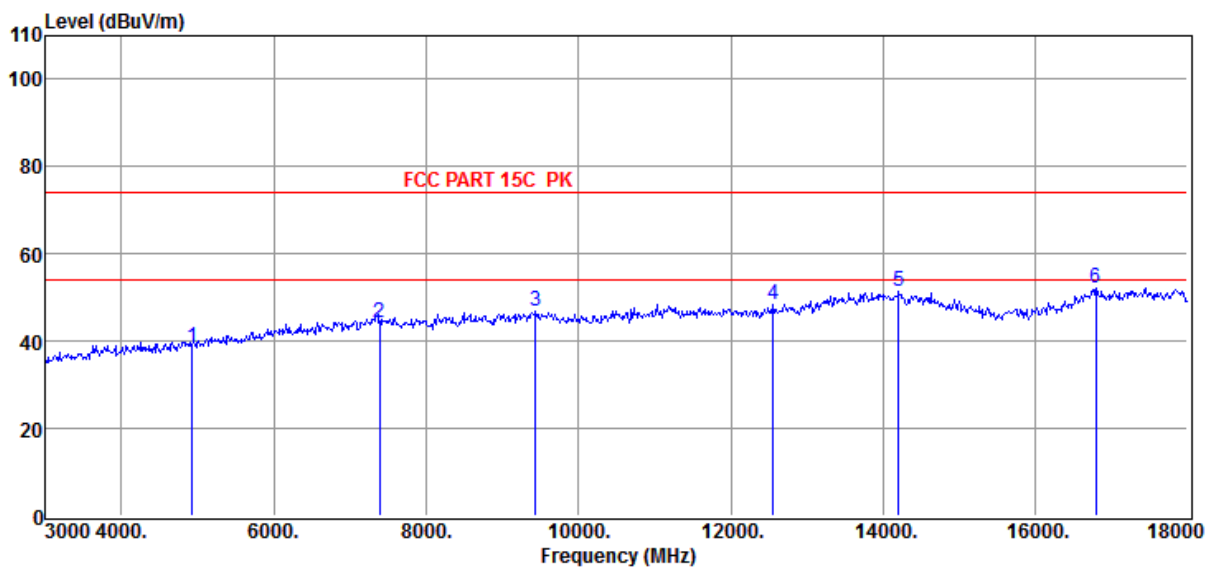

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4924.00	1.07	38.72	74.00	-35.28	184	65	Peak	HORIZONTAL
2	7386.00	6.24	44.12	74.00	-29.88	162	219	Peak	HORIZONTAL
3	9435.00	8.05	46.82	74.00	-27.18	183	196	Peak	HORIZONTAL
4	12555.00	9.52	48.22	74.00	-25.78	176	180	Peak	HORIZONTAL
5	14205.00	14.01	51.30	74.00	-22.70	155	193	Peak	HORIZONTAL
6	16800.00	15.44	52.35	74.00	-21.65	184	288	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 2422MHz

Data: 92

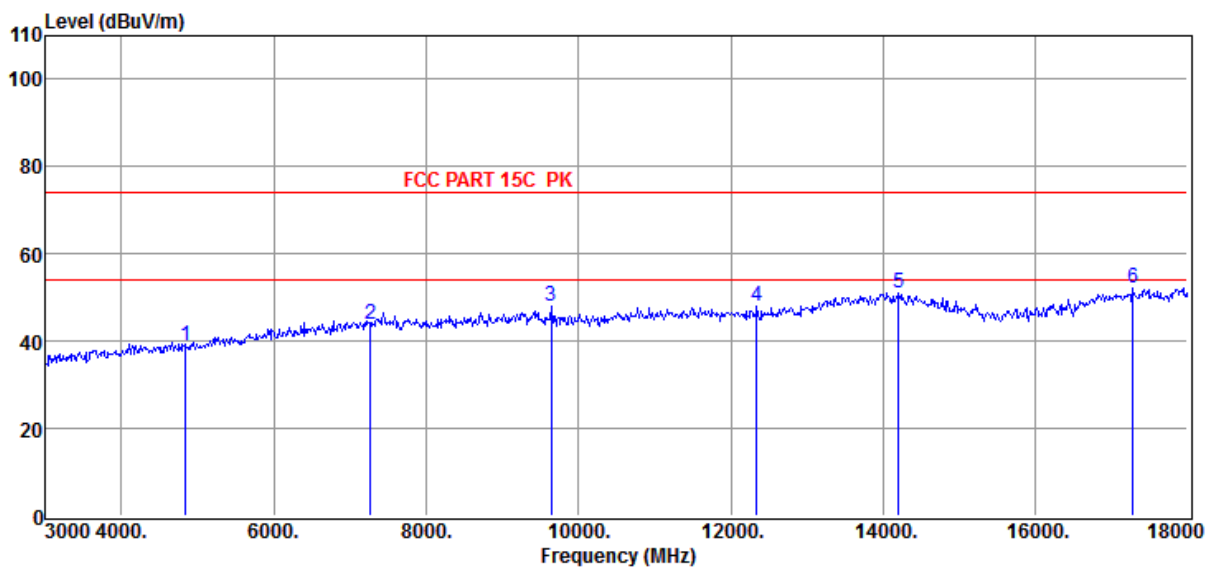

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4844.00	0.88	38.86	74.00	-35.14	150	64	Peak	HORIZONTAL
2	7266.00	6.37	43.79	74.00	-30.21	171	176	Peak	HORIZONTAL
3	9645.00	8.08	47.92	74.00	-26.08	169	265	Peak	HORIZONTAL
4	12345.00	9.48	48.01	74.00	-25.99	178	3	Peak	HORIZONTAL
5	14205.00	14.01	51.08	74.00	-22.92	153	69	Peak	HORIZONTAL
6	17280.00	15.77	52.23	74.00	-21.77	155	60	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 2422MHz

Data: 93

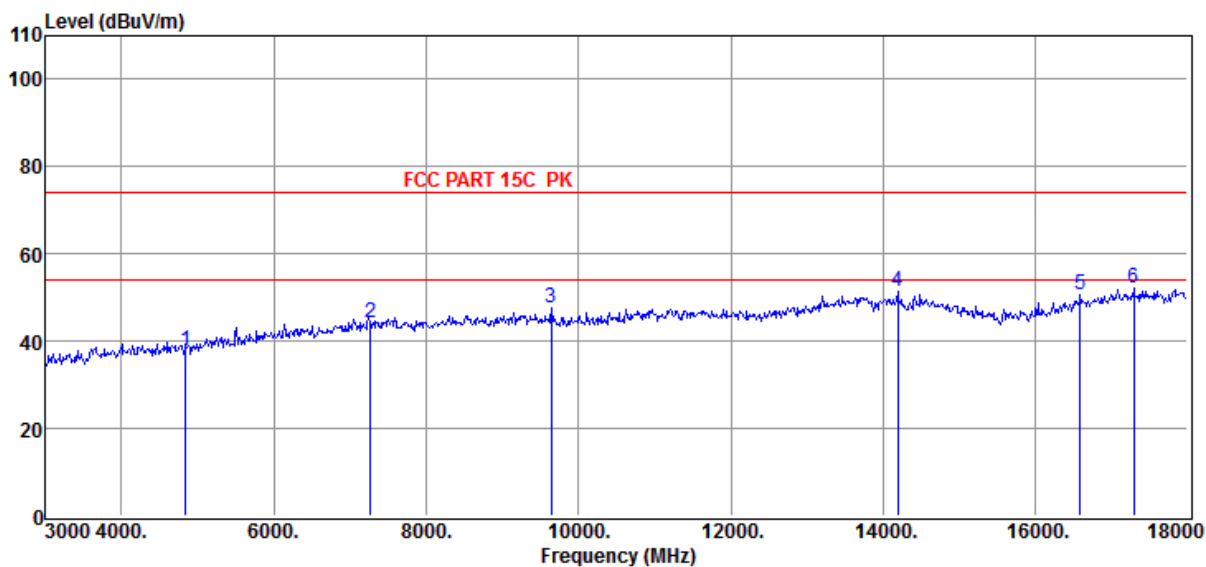

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4844.00	0.88	37.67	74.00	-36.33	182	16	Peak	VERTICAL
2	7266.00	6.37	44.05	74.00	-29.95	152	358	Peak	VERTICAL
3	9645.00	8.08	47.45	74.00	-26.55	180	68	Peak	VERTICAL
4	14190.00	13.97	51.32	74.00	-22.68	160	201	Peak	VERTICAL
5	16590.00	13.91	50.67	74.00	-23.33	155	173	Peak	VERTICAL
6	17295.00	15.81	52.27	74.00	-21.73	150	205	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 2437MHz

Data: 94

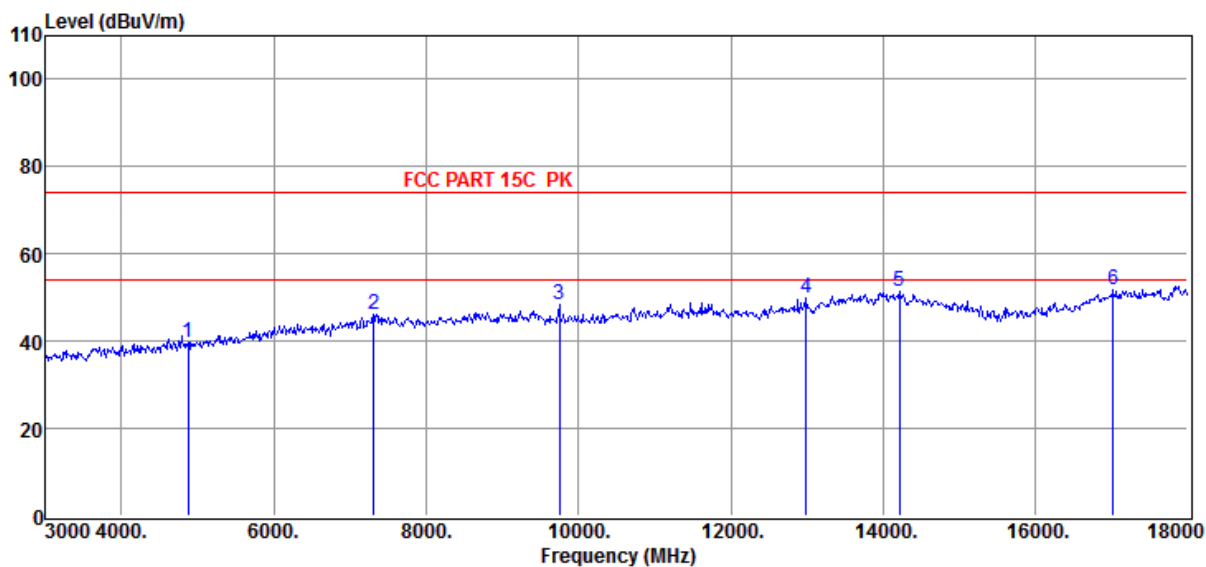

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4874.00	0.92	39.58	74.00	-34.42	168	86	Peak	VERTICAL
2	7311.00	6.34	46.04	74.00	-27.96	155	261	Peak	VERTICAL
3	9750.00	8.09	48.34	74.00	-25.66	165	355	Peak	VERTICAL
4	12990.00	9.82	50.05	74.00	-23.95	178	89	Peak	VERTICAL
5	14220.00	13.82	51.39	74.00	-22.61	165	101	Peak	VERTICAL
6	17025.00	16.14	51.77	74.00	-22.23	155	214	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 2437MHz

Data: 95

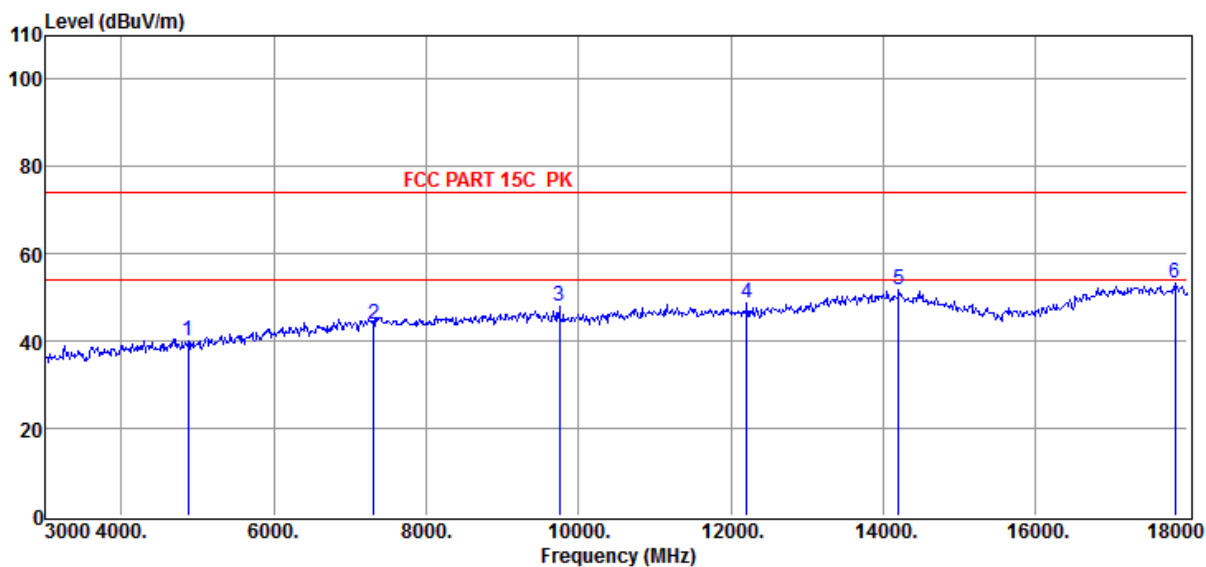

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4875.00	0.91	39.92	74.00	-34.08	178	184	Peak	HORIZONTAL
2	7311.00	6.34	44.00	74.00	-30.00	182	93	Peak	HORIZONTAL
3	9750.00	8.09	47.86	74.00	-26.14	176	37	Peak	HORIZONTAL
4	12210.00	9.64	48.76	74.00	-25.24	154	40	Peak	HORIZONTAL
5	14205.00	14.01	51.73	74.00	-22.27	153	199	Peak	HORIZONTAL
6	17835.00	15.29	53.16	74.00	-20.84	183	297	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/HORIZONTAL

Memo : 11N40 MCS8 ANT1+ANT2 2452MHz

Data: 96

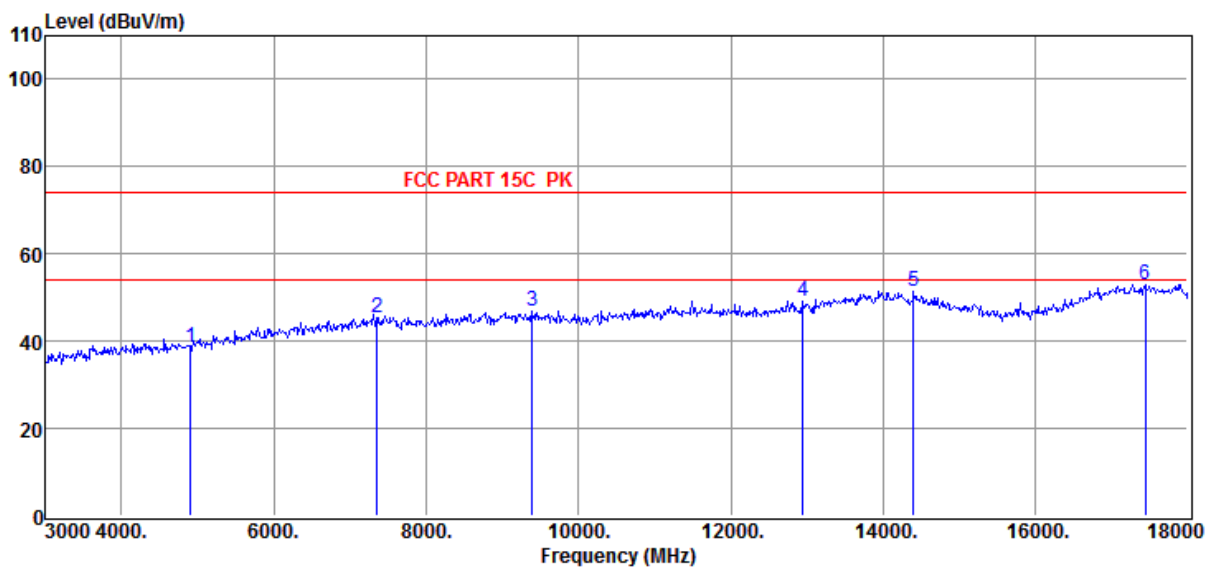

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4904.00	0.96	38.40	74.00	-35.60	175	303	Peak	HORIZONTAL
2	7356.00	6.52	45.46	74.00	-28.54	153	157	Peak	HORIZONTAL
3	9390.00	8.13	46.92	74.00	-27.08	164	327	Peak	HORIZONTAL
4	12945.00	9.98	49.22	74.00	-24.78	176	281	Peak	HORIZONTAL
5	14400.00	13.83	51.23	74.00	-22.77	179	60	Peak	HORIZONTAL
6	17445.00	15.59	52.92	74.00	-21.08	179	111	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa **Antenna/Distance** : 3m/VERTICAL

Memo : 11N40 MCS8 ANT1+ANT2 2452MHz

Data: 97

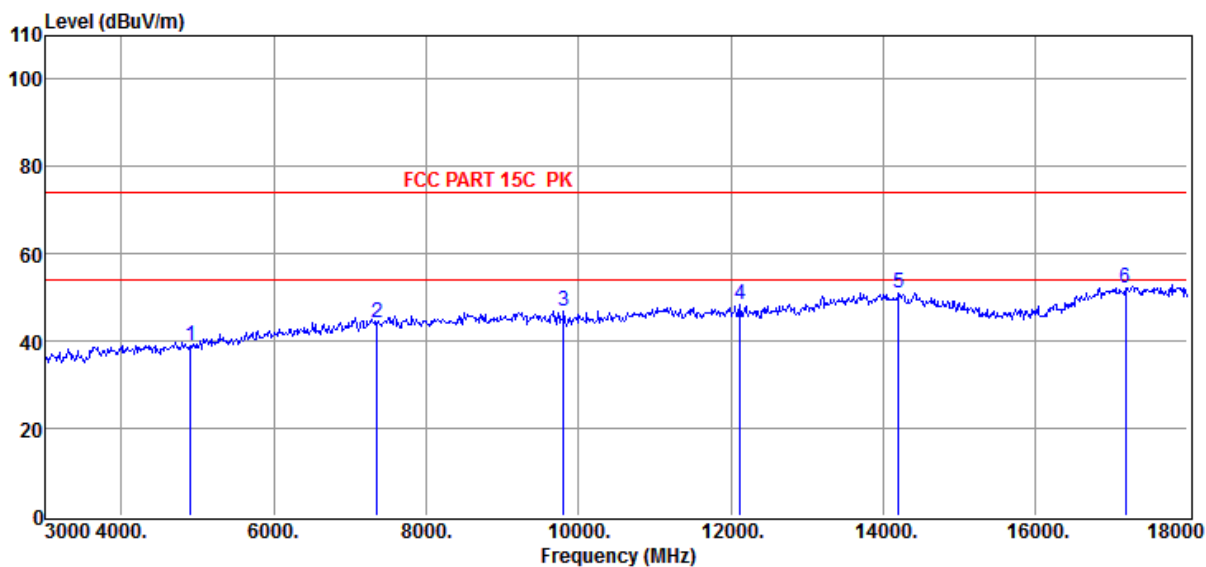

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	4904.00	0.96	38.86	74.00	-35.14	153	148	Peak	VERTICAL
2	7356.00	6.52	44.27	74.00	-29.73	163	205	Peak	VERTICAL
3	9810.00	8.13	46.88	74.00	-27.12	178	287	Peak	VERTICAL
4	12120.00	9.82	48.34	74.00	-25.66	150	360	Peak	VERTICAL
5	14205.00	14.01	51.05	74.00	-22.95	177	294	Peak	VERTICAL
6	17190.00	15.55	52.24	74.00	-21.76	151	266	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

6. Band Edge Compliance (Radiated Method)

6.1. Block diagram of test setup

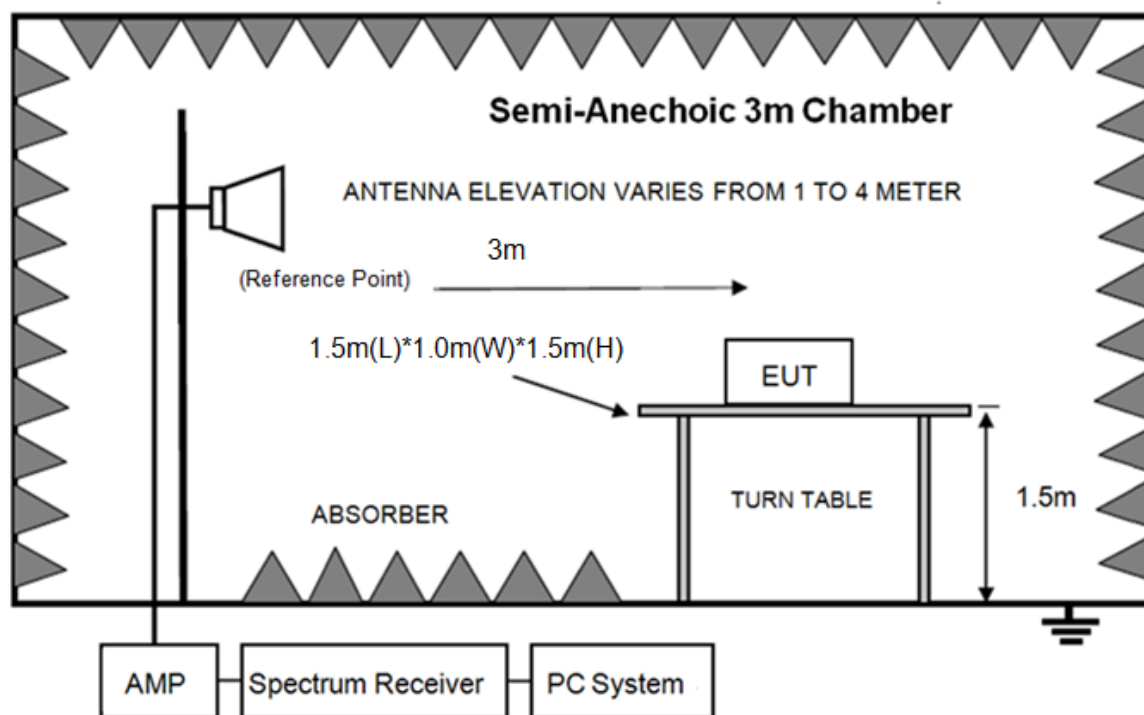

6.2. Limit

All restriction band should comply with 15.209, other emission should be at least 20 dB below the fundamental.

6.3. Test Procedure

Same with clause 10.3 except change investigated frequency range from 2310 MHz to 2430 MHz and 2445 MHz to 2550 MHz.

Remark: All restriction band have been tested, and only the worst case is shown in report.

6.4. Test result

Pass. (See below detailed test result)

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202

Power Supply : Battery


Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa

Antenna/Distance : 3m/VERTICAL

Memo : 11B ANT1 1M 2412MHz

Data: 36

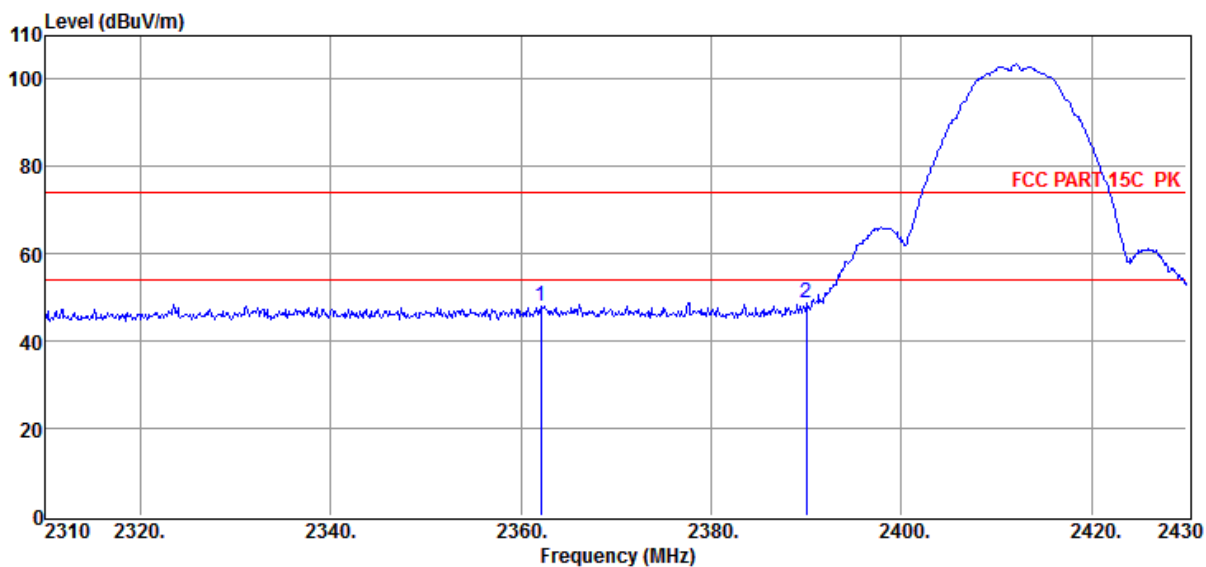

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2362.08	3.22	47.93	74.00	-26.07	152	12	Peak	VERTICAL
2	2390.00	3.30	48.74	74.00	-25.26	160	231	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202

Power Supply : Battery


Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa
a

Antenna/Distance : 3m/HORIZONTAL

Memo : 11B ANT1 1M 2412MHz

Data: 37

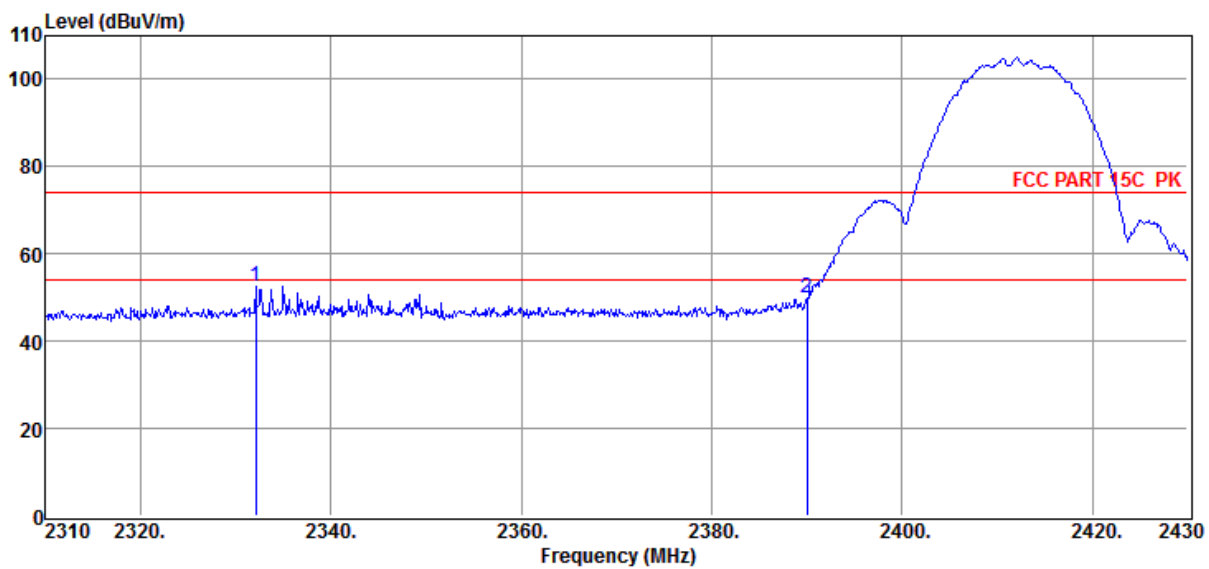

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2332.08	2.73	52.63	74.00	-21.37	166	24	Peak	HORIZONTAL
2	2390.00	3.30	49.95	74.00	-24.05	157	300	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202

Power Supply : Battery


Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa
a

Antenna/Distance : 3m/HORIZONTAL

Memo : 11B ANT2 1M 2412MHz

Data: 38

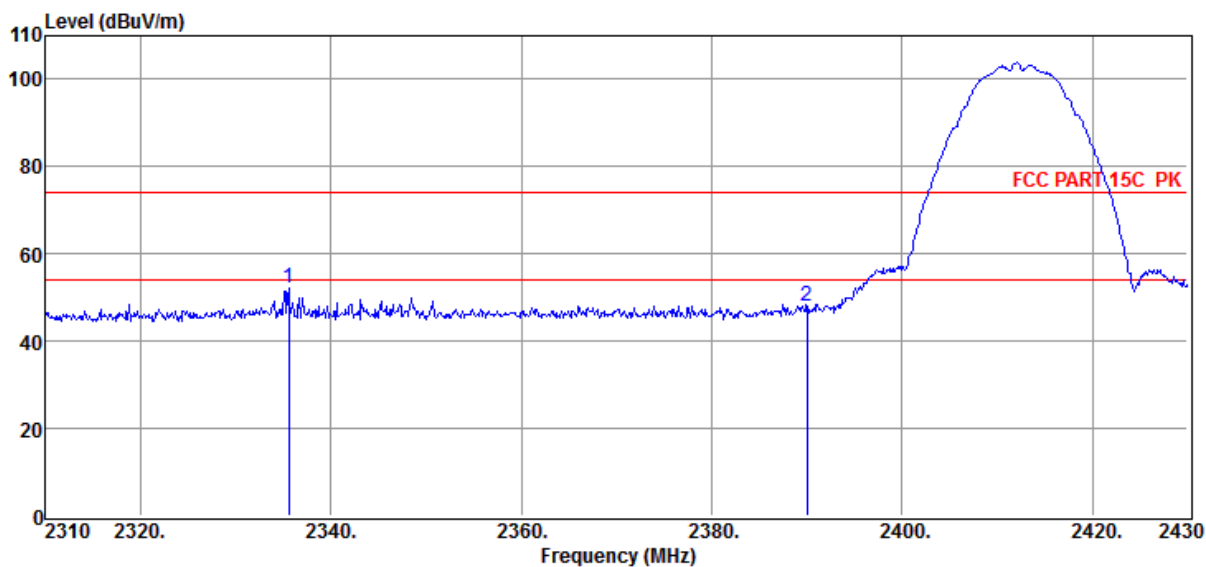

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2335.56	2.82	52.03	74.00	-21.97	175	232	Peak	HORIZONTAL
2	2390.00	3.30	47.95	74.00	-26.05	159	65	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202

Power Supply : Battery


Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa
a

Antenna/Distance : 3m/VERTICAL

Memo : 11B ANT2 1M 2412MHz

Data: 39

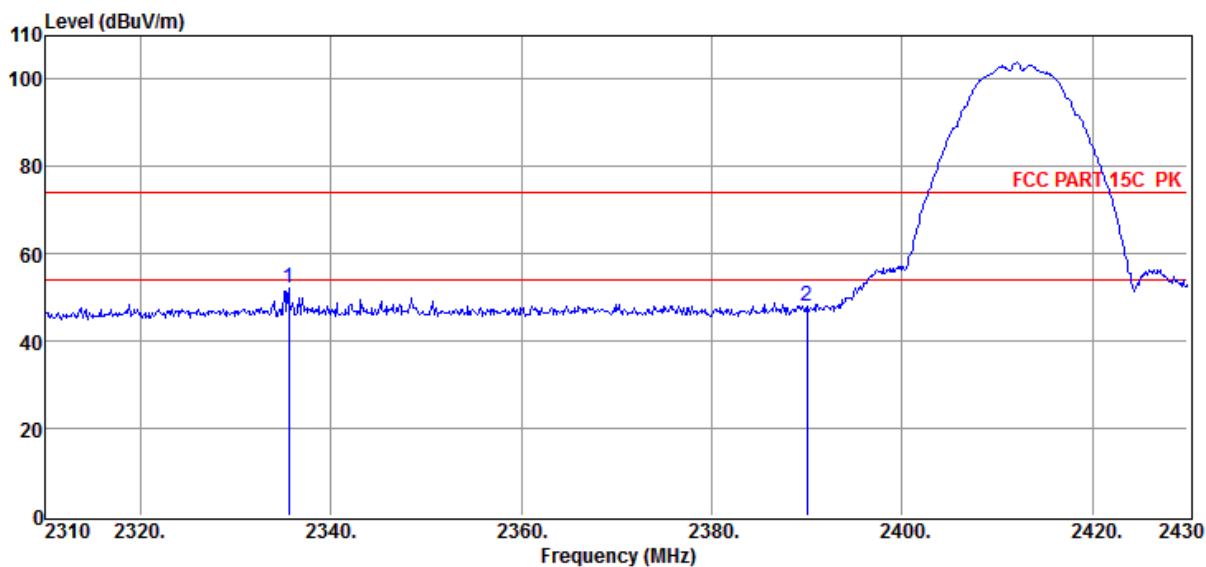

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2335.56	2.82	52.03	74.00	-21.97	153	78	Peak	VERTICAL
2	2390.00	3.30	47.95	74.00	-26.05	162	147	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202

Power Supply : Battery


Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa

Antenna/Distance : 3m/VERTICAL

Memo : 11B ANT2 1M 2462MHz

Data: 40

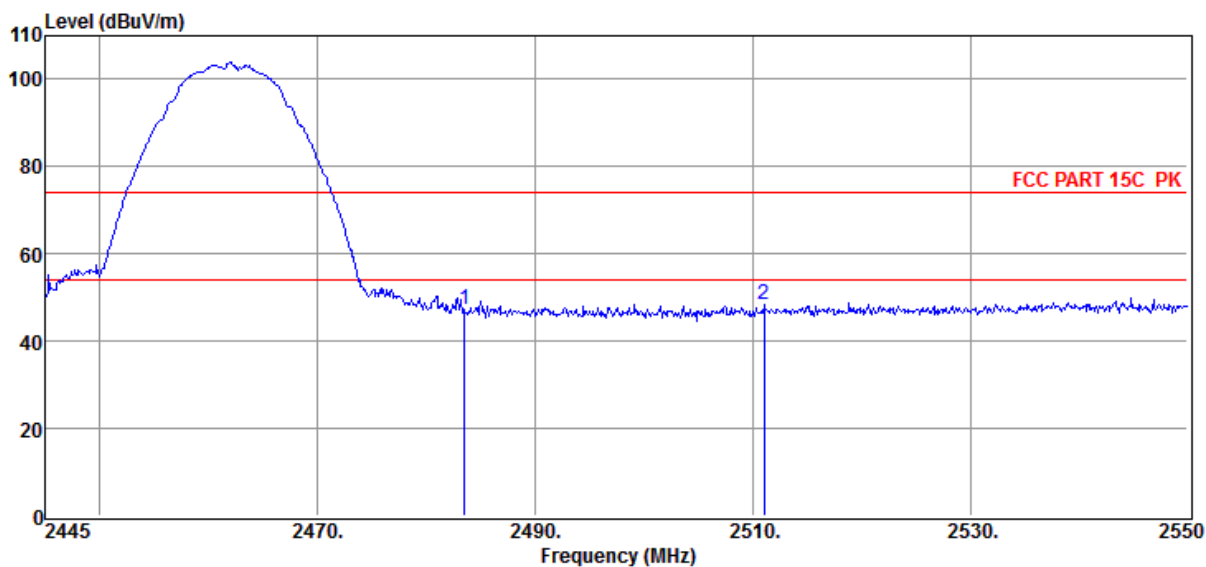

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2483.50	3.52	47.42	74.00	-26.58	163	209	Peak	VERTICAL
2	2511.05	3.90	48.43	74.00	-25.57	178	33	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202

Power Supply : Battery


Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa
a

Antenna/Distance : 3m/HORIZONTAL

Memo : 11B ANT2 1M 2462MHz

Data: 41

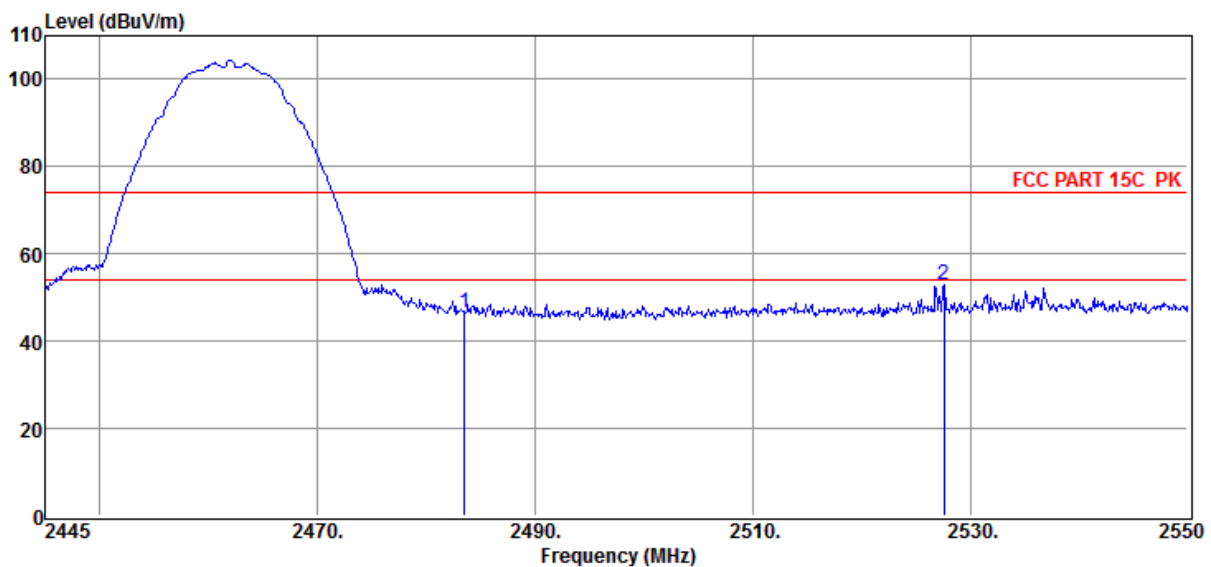

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2483.50	3.52	46.60	74.00	-27.40	159	36	Peak	HORIZONTAL
2	2527.64	4.27	53.01	74.00	-20.99	168	160	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202

Power Supply : Battery


Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa

Antenna/Distance : 3m/HORIZONTAL

Memo : 11B ANT1 1M 2462MHz

Data: 42

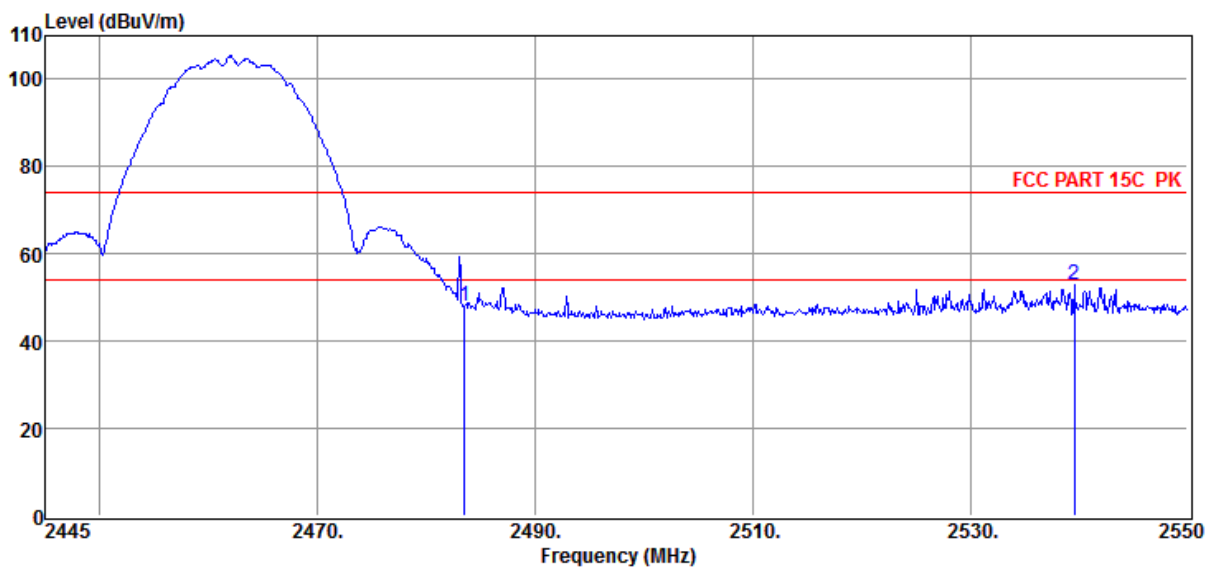

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2483.50	3.52	48.19	74.00	-25.81	176	79	Peak	HORIZONTAL
2	2539.61	4.55	52.92	74.00	-21.08	186	64	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202

Power Supply : Battery


Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa

Antenna/Distance : 3m/VERTICAL

Memo : 11B ANT1 1M 2462MHz

Data: 43

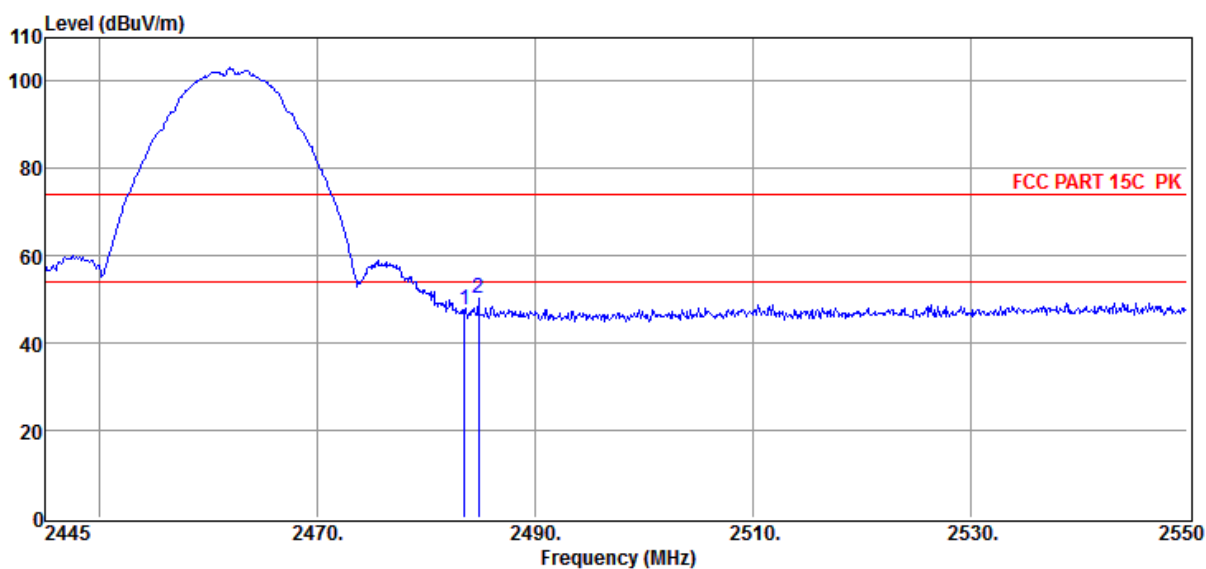

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2483.50	3.52	47.79	74.00	-26.21	154	305	Peak	VERTICAL
2	2484.80	3.53	50.24	74.00	-23.76	157	31	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202

Power Supply : Battery


Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa

Antenna/Distance : 3m/VERTICAL

Memo : 11G ANT1 6M 2412MHz

Data: 46

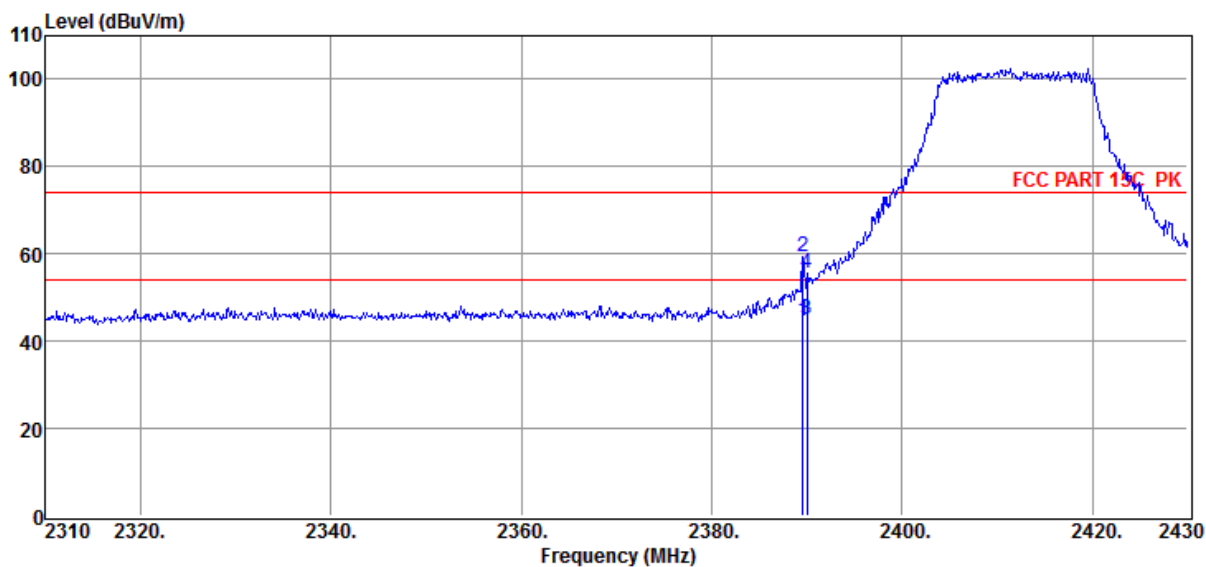

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2389.56	3.31	44.64	54.00	-9.36	155	80	Average	VERTICAL
2	2389.56	3.31	59.38	74.00	-14.62	164	98	Peak	VERTICAL
3	2390.00	3.30	45.01	54.00	-8.99	166	114	Average	VERTICAL
4	2390.00	3.30	55.46	74.00	-18.54	170	127	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202

Power Supply : Battery


Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa
a

Antenna/Distance : 3m/HORIZONTAL

Memo : 11G ANT1 6M 2412MHz

Data: 47

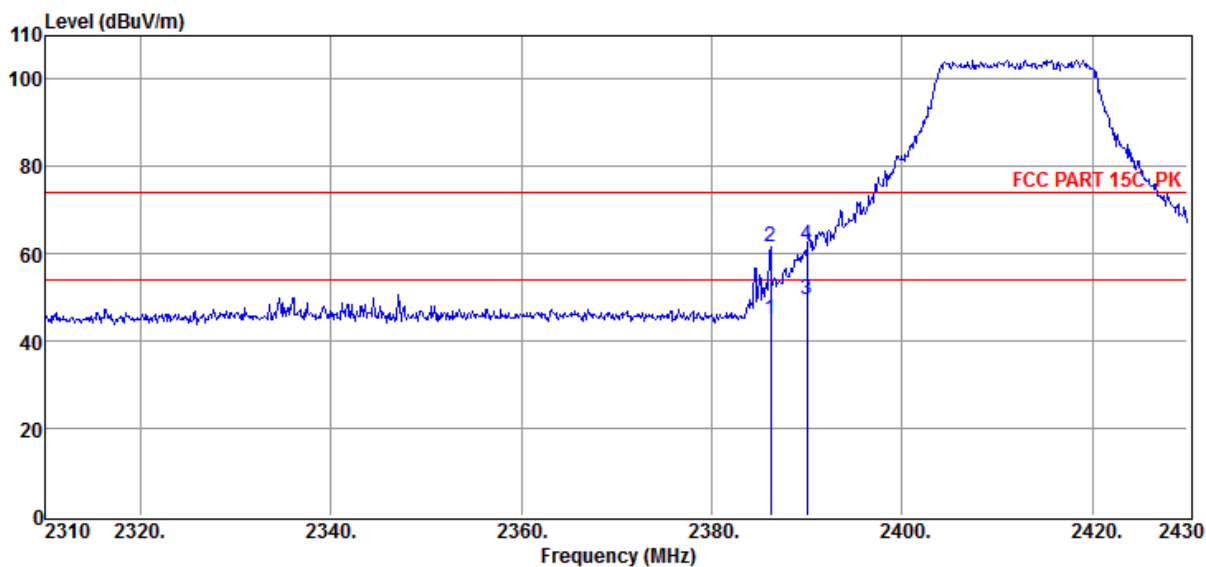

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2386.20	3.29	44.98	54.00	-9.02	152	306	Average	HORIZONTAL
2	2386.20	3.29	61.47	74.00	-12.53	163	349	Peak	HORIZONTAL
3	2390.00	3.30	49.43	54.00	-4.57	158	11	Average	HORIZONTAL
4	2390.00	3.30	62.09	74.00	-11.91	166	84	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202

Power Supply : Battery


Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa
a

Antenna/Distance : 3m/HORIZONTAL

Memo : 11G ANT2 6M 2412MHz

Data: 48

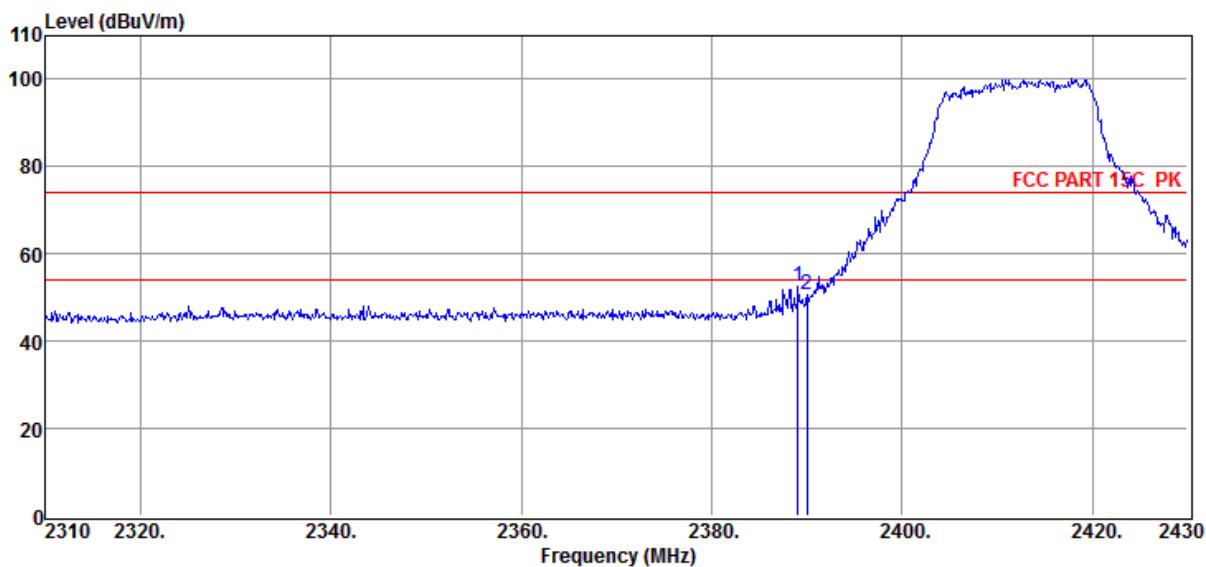

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2389.08	3.30	52.57	74.00	-21.43	177	32	Peak	HORIZONTAL
2	2390.00	3.30	50.72	74.00	-23.28	168	127	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202

Power Supply : Battery


Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa

Antenna/Distance : 3m/VERTICAL

Memo : 11G ANT2 6M 2412MHz

Data: 49

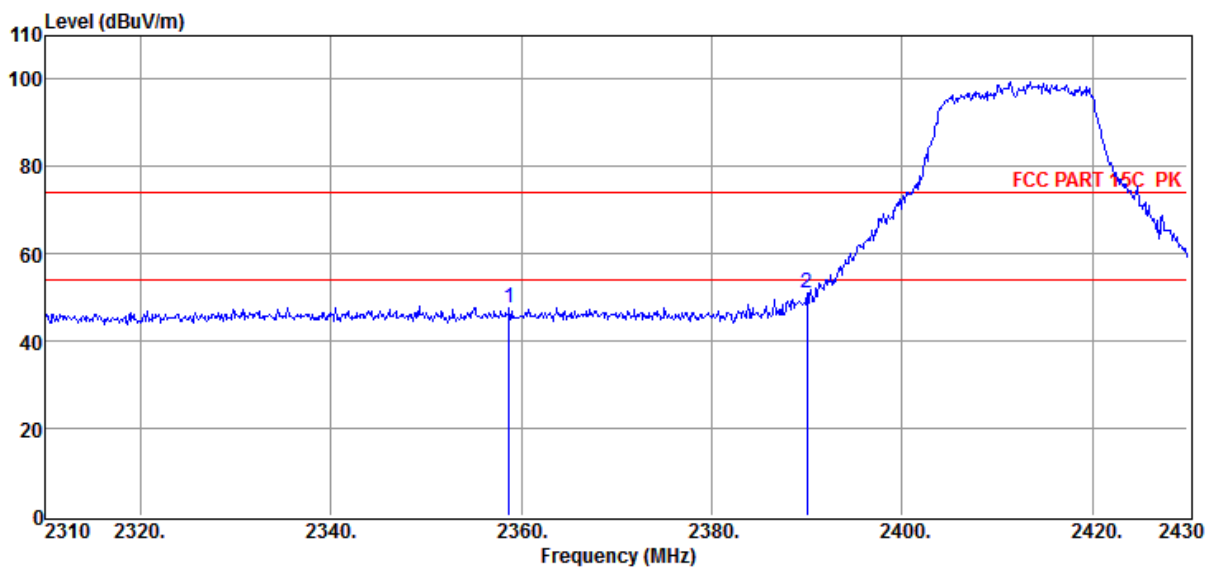

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2358.72	3.22	47.52	74.00	-26.48	169	253	Peak	VERTICAL
2	2390.00	3.30	50.96	74.00	-23.04	174	167	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202

Power Supply : Battery


Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa

Antenna/Distance : 3m/HORIZONTAL

Memo : 11G ANT1 6M 2462MHz

Data: 52

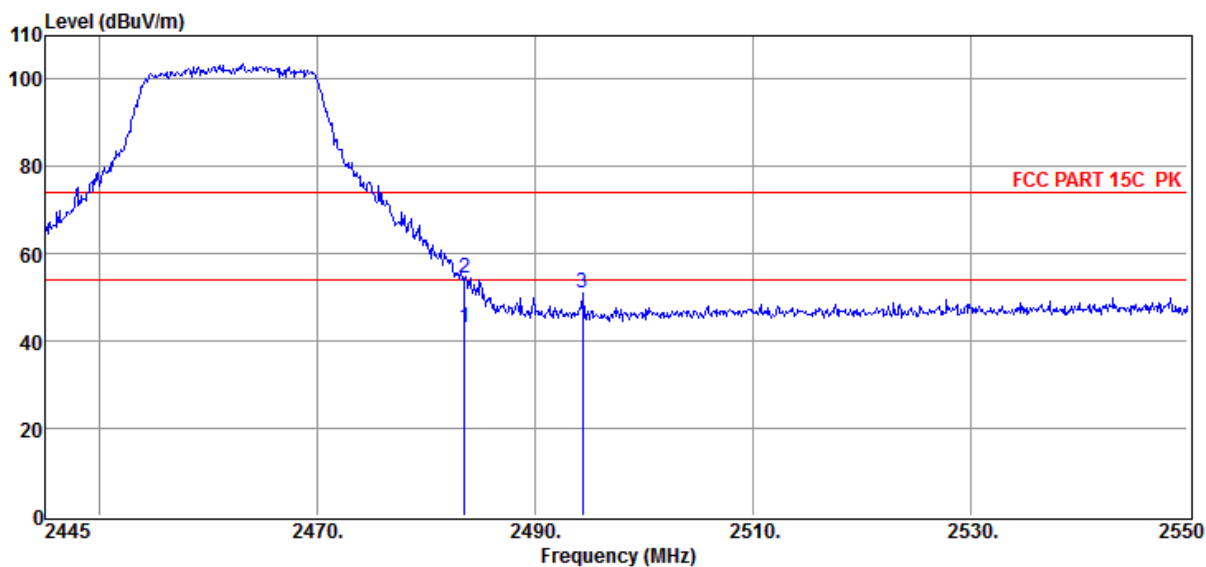

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2483.50	3.52	43.04	54.00	-10.96	152	45	Average	HORIZONTAL
2	2483.50	3.52	54.50	74.00	-19.50	159	63	Peak	HORIZONTAL
3	2494.35	3.60	51.02	74.00	-22.98	178	112	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202

Power Supply : Battery


Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa

Antenna/Distance : 3m/VERTICAL

Memo : 11G ANT1 6M 2462MHz

Data: 53

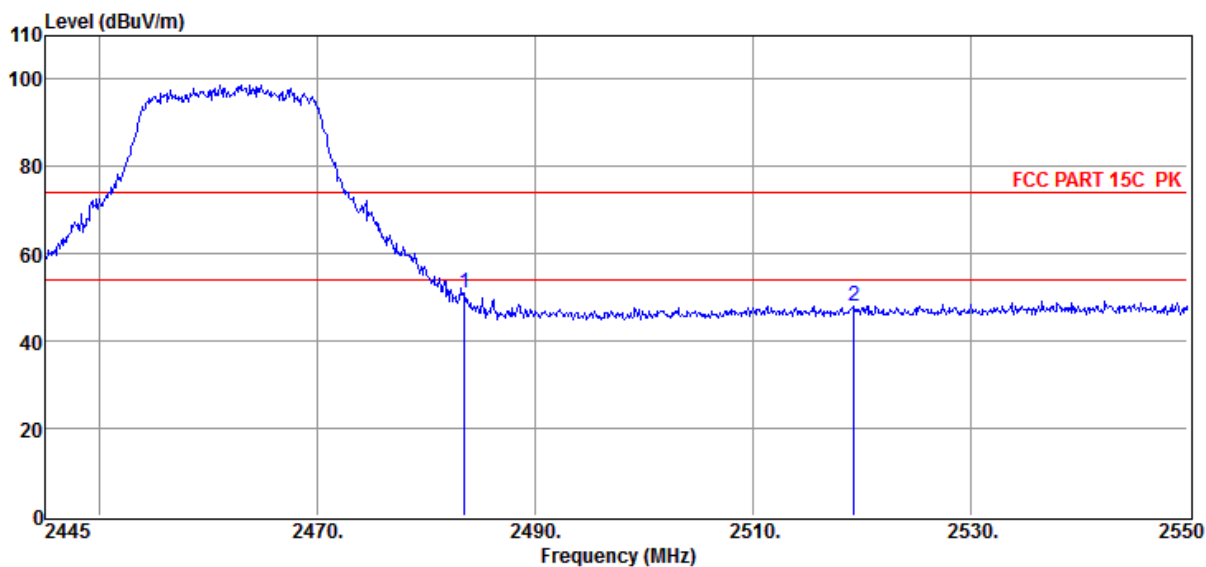

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2483.50	3.52	51.01	74.00	-22.99	161	88	Peak	VERTICAL
2	2519.34	4.09	48.13	74.00	-25.87	173	309	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202

Power Supply : Battery


Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa

Antenna/Distance : 3m/VERTICAL

Memo : 11G ANT2 6M 2462MHz

Data: 50

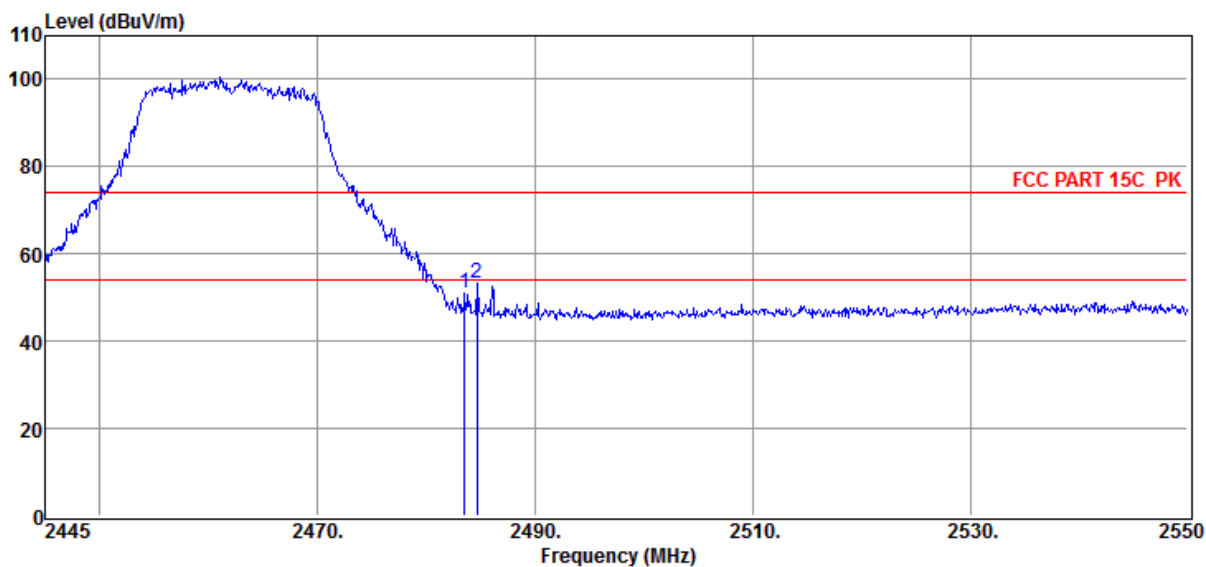

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2483.50	3.52	50.98	74.00	-23.02	153	56	Peak	VERTICAL
2	2484.69	3.53	53.15	74.00	-20.85	184	153	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202

Power Supply : Battery


Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa
a

Antenna/Distance : 3m/HORIZONTAL

Memo : 11G ANT2 6M 2462MHz

Data: 51

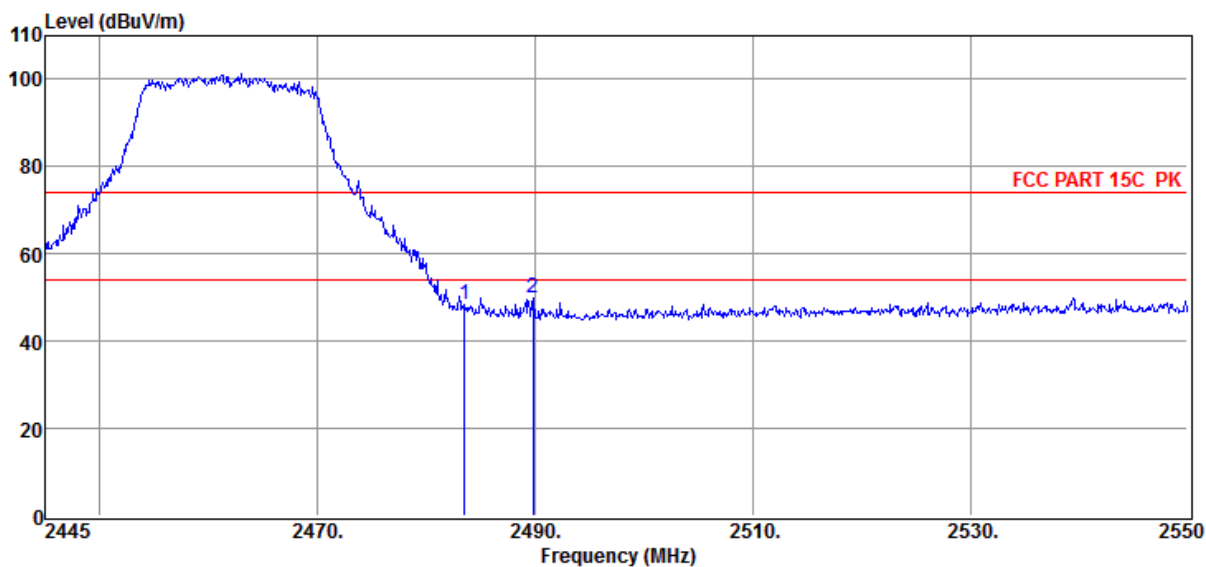

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2483.50	3.52	48.38	74.00	-25.62	156	15	Peak	HORIZONTAL
2	2489.84	3.57	49.98	74.00	-24.02	167	261	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa
Antenna/Distance : 3m/HORIZONTAL

Memo : 11N20 ANT1+ANT2 MCS8 2412MHz

Data: 54

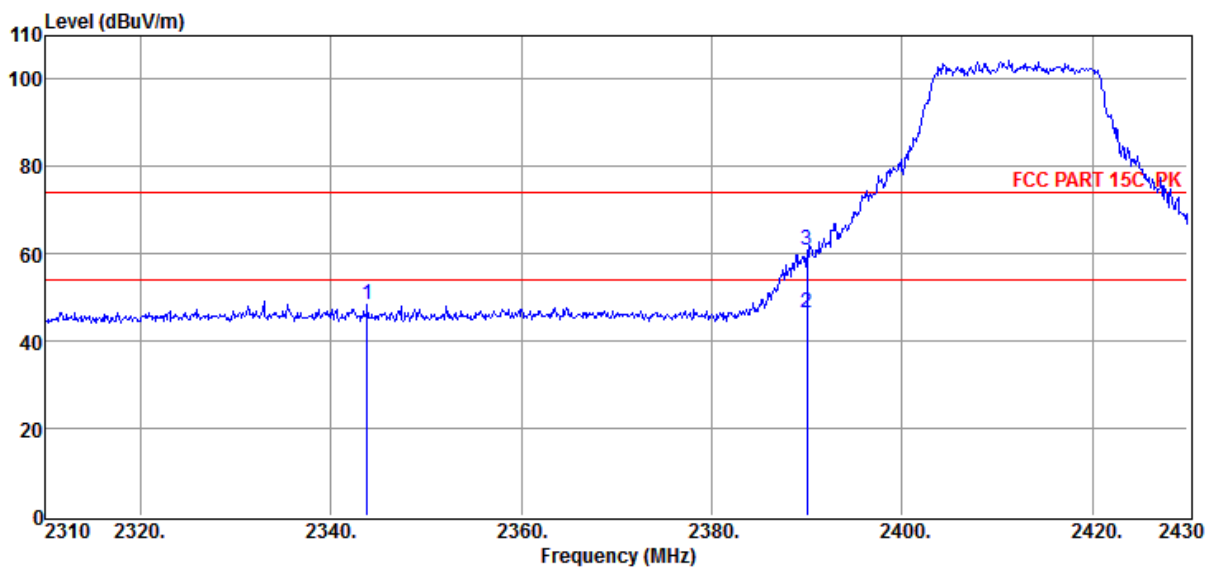

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2343.84	3.03	48.50	74.00	-25.50	174	25	Peak	HORIZONTAL
2	2390.00	3.30	46.65	54.00	-7.35	160	67	Average	HORIZONTAL
3	2390.00	3.30	60.74	74.00	-13.26	163	208	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa
Antenna/Distance : 3m/VERTICAL

Memo : 11N20 ANT1+ANT2 MCS8 2412MHz

Data: 55

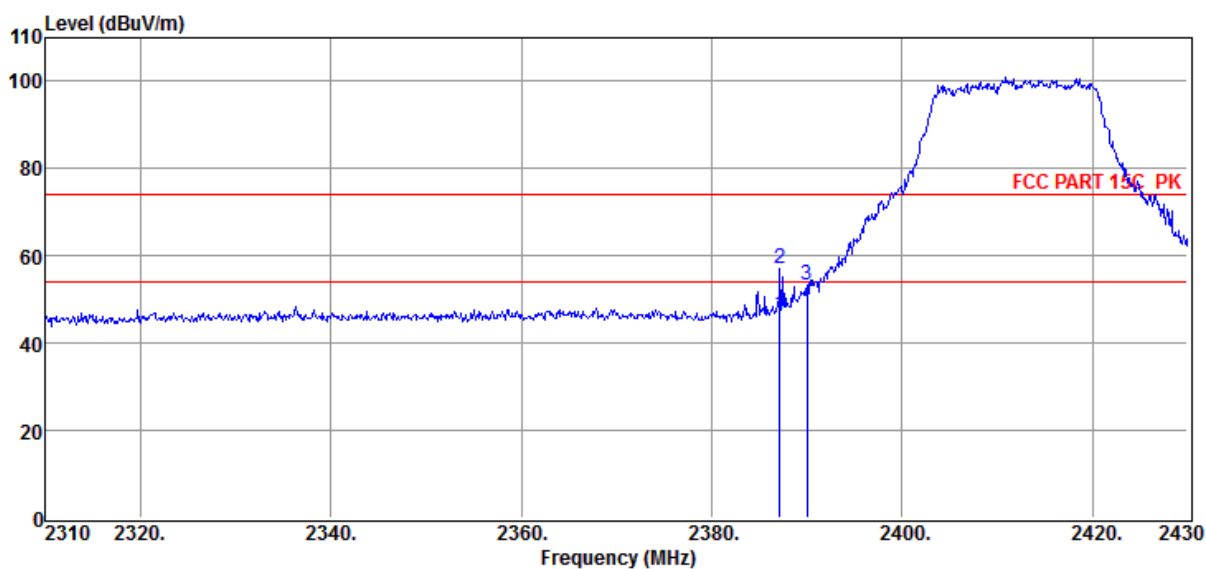

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2387.16	3.29	46.48	54.00	-7.52	158	114	Average	VERTICAL
2	2387.16	3.29	57.06	74.00	-16.94	168	25	Peak	VERTICAL
3	2390.00	3.30	53.39	74.00	-20.61	159	36	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa
Antenna/Distance : 3m/VERTICAL

Memo : 11N20 ANT1+ANT2 MCS8 2462MHz

Data: 56

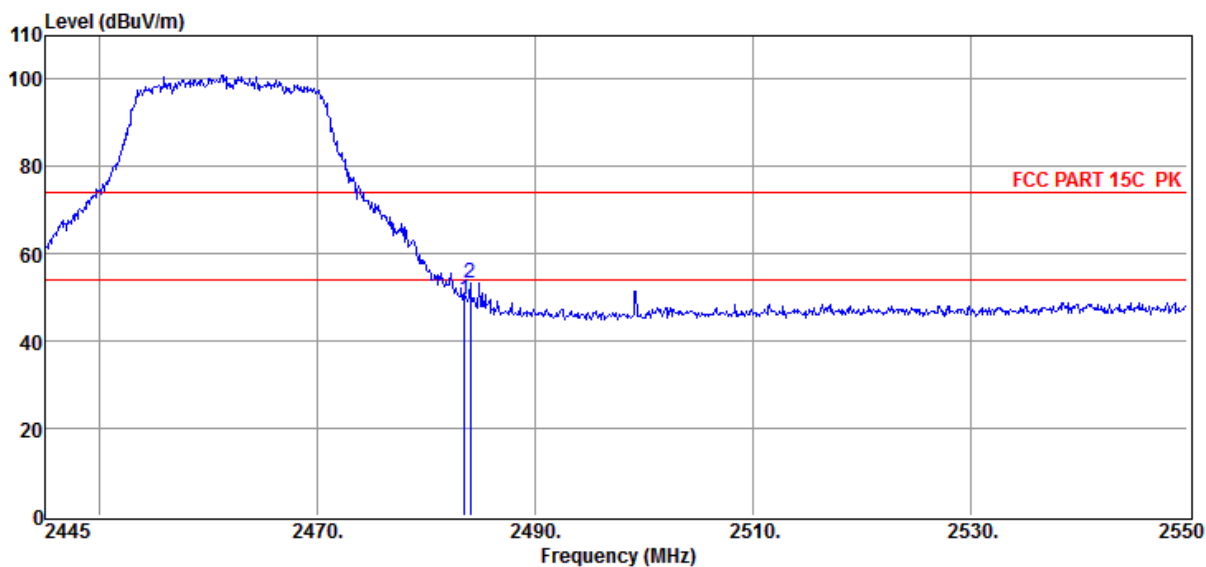

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2483.50	3.52	49.57	74.00	-24.43	165	34	Peak	VERTICAL
2	2484.06	3.52	53.43	74.00	-20.57	167	55	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa
Antenna/Distance : 3m/HORIZONTAL

Memo : 11N20 ANT1+ANT2 MCS8 2462MHz

Data: 57

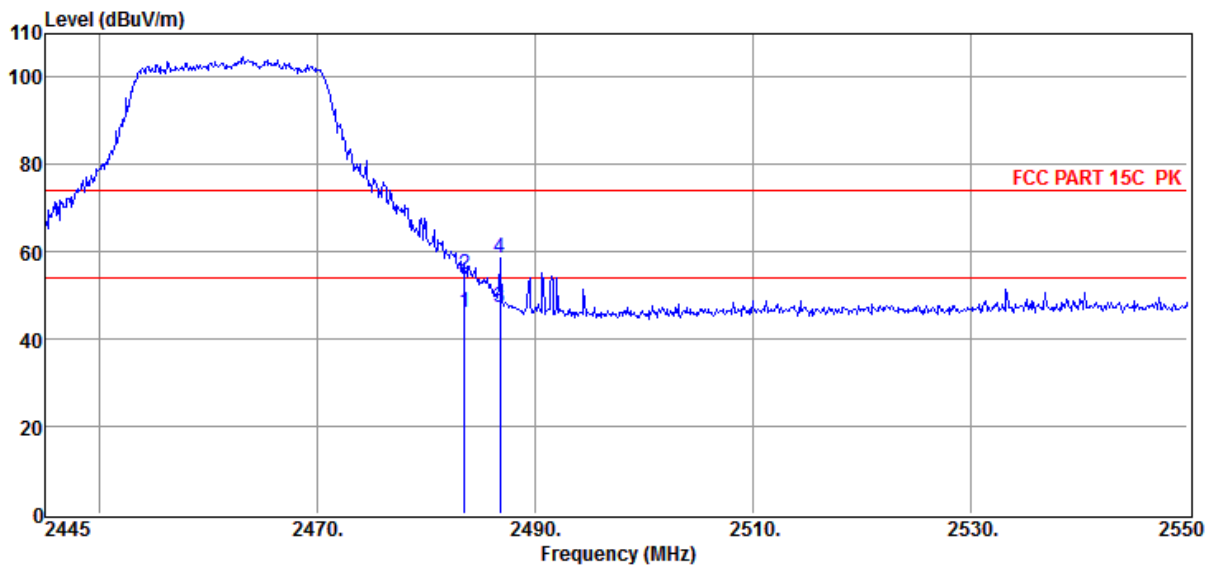

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2483.50	3.52	45.95	54.00	-8.05	155	30	Average	HORIZONTAL
2	2483.50	3.52	54.72	74.00	-19.28	167	320	Peak	HORIZONTAL
3	2486.79	3.55	47.11	54.00	-6.89	167	13	Average	HORIZONTAL
4	2486.79	3.55	58.66	74.00	-15.34	178	37	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa
Antenna/Distance : 3m/VERTICAL

Memo : 11N40 ANT1+ANT2 MCS8 2422MHz

Data: 58

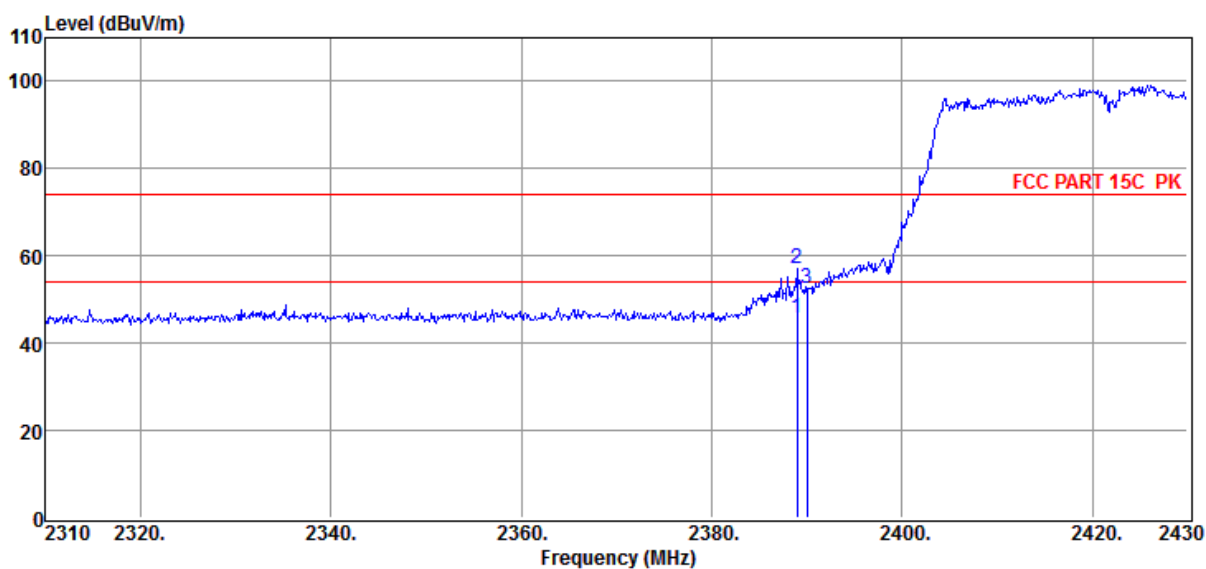

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2388.96	3.30	45.56	54.00	-8.44	157	132	Average	VERTICAL
2	2388.96	3.30	57.18	74.00	-16.82	159	22	Peak	VERTICAL
3	2390.00	3.30	52.43	74.00	-21.57	173	35	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa
Antenna/Distance : 3m/HORIZONTAL

Memo : 11N40 ANT1+ANT2 MCS8 2422MHz

Data: 59

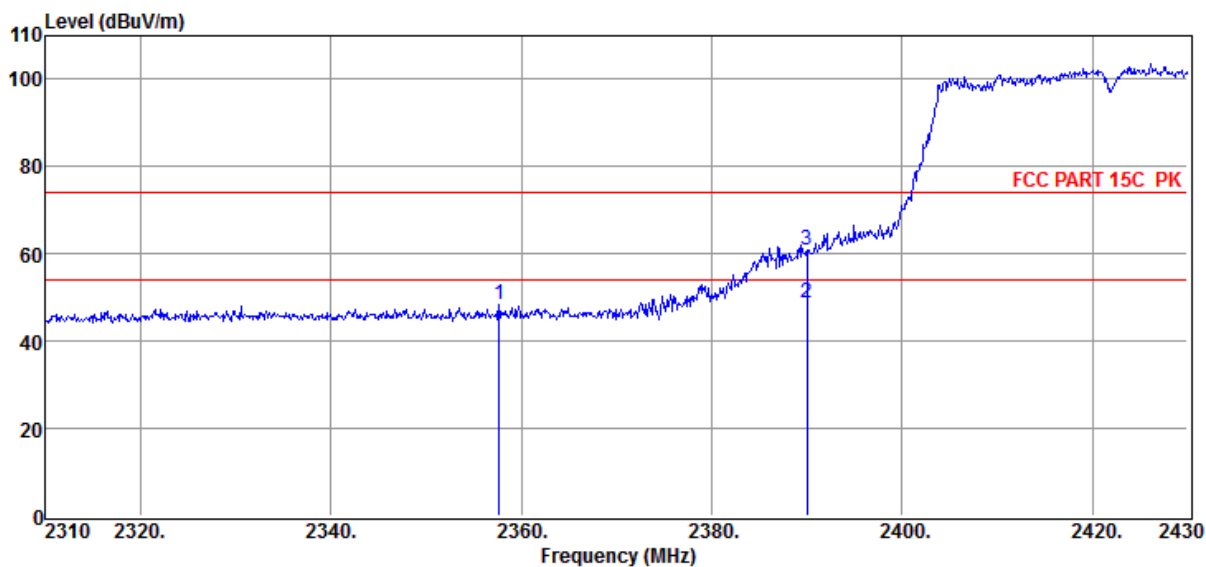

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2357.64	3.21	48.53	74.00	-25.47	157	360	Peak	HORIZONTAL
2	2390.00	3.30	48.91	54.00	-5.09	165	78	Average	HORIZONTAL
3	2390.00	3.30	60.71	74.00	-13.29	176	356	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa
Antenna/Distance : 3m/HORIZONTAL

Memo : 11N40 ANT1+ANT2 MCS8 2452MHz

Data: 60

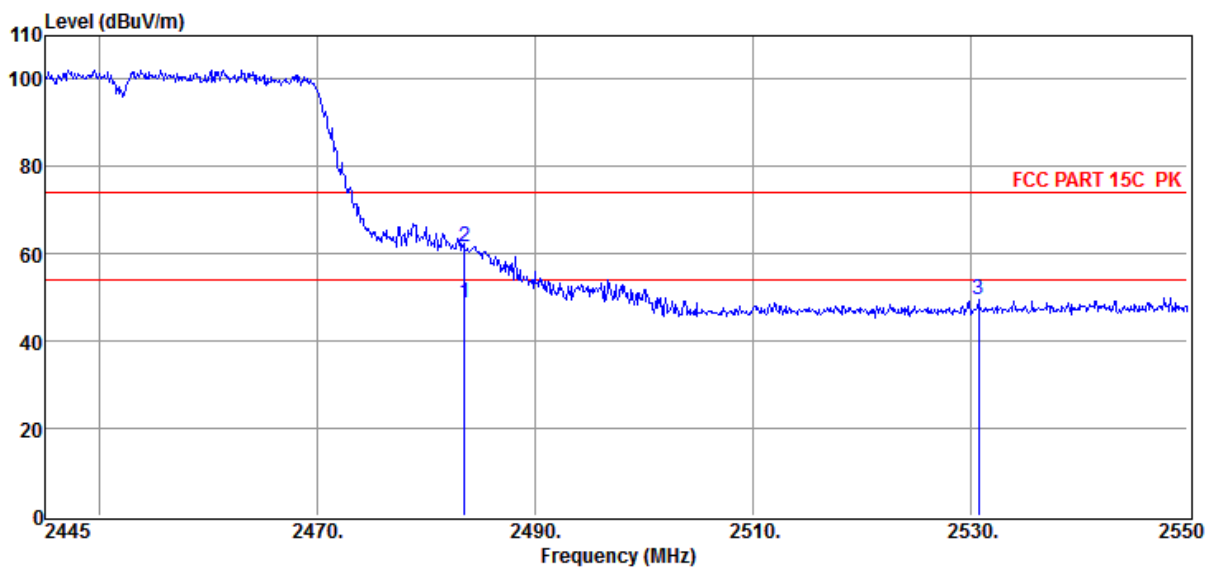

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2483.50	3.52	48.90	54.00	-5.10	167	34	Average	HORIZONTAL
2	2483.50	3.52	61.51	74.00	-12.49	158	24	Peak	HORIZONTAL
3	2530.79	4.35	49.53	74.00	-24.47	171	108	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 11-30-2021

Tested By : Sunny

EUT : Tablet Computer

Model Number : A8202


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.3°C,Humi:52%,Press:101.6kPa
Antenna/Distance : 3m/VERTICAL

Memo : 11N40 ANT1+ANT2 MCS8 2452MHz

Data: 61

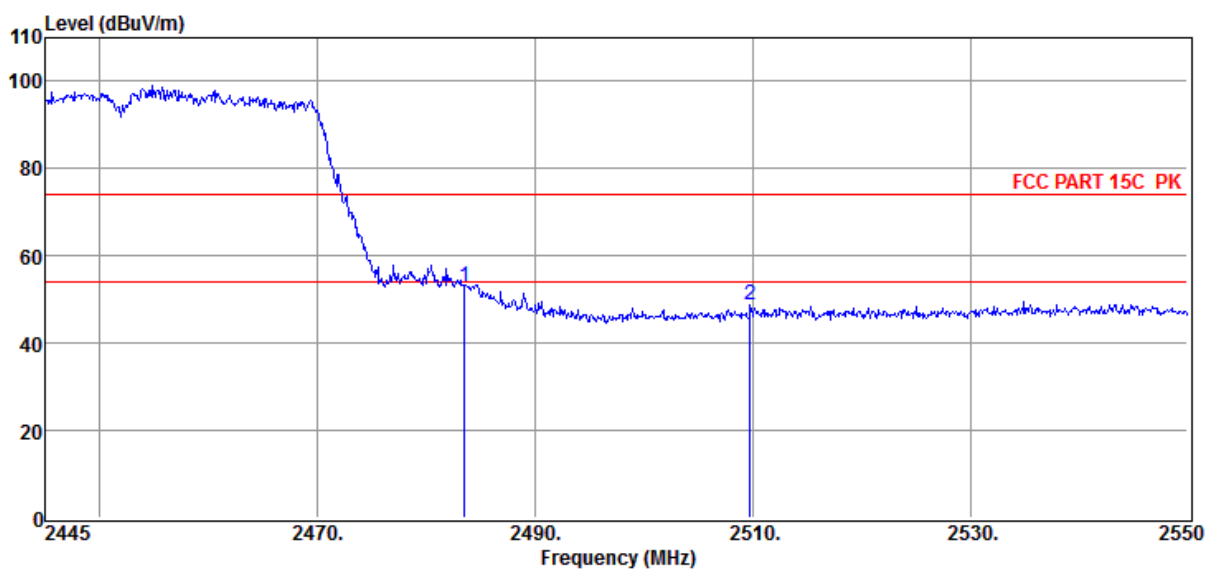

Item (Mark)	Freq. (MHz)	Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Height (cm)	Angle (deg)	Detector	Polarization
1	2483.50	3.52	52.77	74.00	-21.23	165	35	Peak	VERTICAL
2	2509.79	3.87	48.61	74.00	-25.39	158	303	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level – Limit.

7. APPENDIXES

The below appendix was detail result tested by SGS-CSTC Standards Technical Services, Co., Ltd. Shenzhen Branch (Date of Test: 2019/7/3 ~ 2019/7/20)

All appendixes were cited in this report.

Appendix	Item
Appendix	2.4GWIFI