

FCC RF Test Report

APPLICANT : Acer Incorporated
EQUIPMENT : Smart HandHeld
BRAND NAME : Acer
MODEL NAME : E130
FCC ID : HLZDME130
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : Digital Spread Spectrum (DSS)

The product was received on Jun. 03, 2010 and completely tested on Jun. 20, 2010. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Roy Wu / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test	5
1.4 Testing Site	6
1.5 Applied Standards	6
1.6 Ancillary Equipment List	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 RF Output Power	7
2.2 Test Mode	8
2.3 Connection Diagram of Test System	9
2.4 RF Utility	9
3 TEST RESULT	10
3.1 Number of Channel Measurement	10
3.2 20dB and 99% Bandwidth Measurement	12
3.3 Hopping Channel Separation Measurement	25
3.4 Dwell Time Measurement	28
3.5 Peak Output Power Measurement	30
3.6 Band Edges Measurement	33
3.7 AC Conducted Emission Measurement	37
3.8 Radiated Emission Measurement	41
3.9 Antenna Requirements	50
4 LIST OF MEASURING EQUIPMENT	51
5 UNCERTAINTY OF EVALUATION	52
APPENDIX A. PHOTOGRAPHS OF EUT	
APPENDIX B. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR060209-01	Rev. 01	Initial issue of report	Jun. 23, 2010

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	A8.4(2)	Number of Channels	$\geq 15\text{Chs}$	Pass	-
3.2	15.247(a)(1)	A8.1(a)	20dB Bandwidth	NA	Pass	-
3.2	-	Gen 4.4.1	99% Bandwidth	-	Pass	-
3.3	15.247(a)(1)	A8.1(b)	Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.4	15.247(a)(1)	A8.1(d)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.5	15.247(b)(1)	A8.1(b)	Peak Output Power	$\leq 1\text{W}$	Pass	-
3.6	15.247(d)	A8.5	Frequency Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.207	Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 13.9 dB at 0.366 MHz
3.8	15.247(d)	A8.5	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.6 dB at 2483.5 MHz
3.9	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

Acer Incorporated

8F., No. 88, Sec. 1, Hsin Tai Wu Rd., Hsichih, Taipei Hsien 221, Taiwan

1.2 Manufacturer

Futaijing Precision Electronics (Beijing) Co., Ltd.

No. 9, Jinxiu Street, Beijing Economic Technology Development Area

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Smart HandHeld
Brand Name	Acer
Model Name	E130
FCC ID	HLZDME130
Tx/Rx Frequency Range	2400 MHz ~ 2483.5 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Channel Spacing	1 MHz
Maximum Output Power to Antenna	Bluetooth (1Mbps) : 2.2 dBm (1.66 mW) Bluetooth EDR (2Mbps) : 0.49 dBm (1.12 mW) Bluetooth EDR (3Mbps) : 0.77 dBm (1.19 mW)
Antenna Type	PIFA Antenna with gain -0.1 dBi
HW Version	1.0 (PR2)
SW Version	Firmware version : 1.6 Baseband version : 40000001122E1105 Build number : Acer_E130_V0.180.10_AAP
Type of Modulation	Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : π /4-DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
EUT Stage	Identical Prototype

Remark:

1. For other wireless features of this EUT, test report will be issued separately.
2. This test report recorded only product characteristics and test results of Digital Spread Spectrum (DSS).
3. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	CO05-HY	03CH07-HY	TW1022/4086B-1

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issue 7

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.

1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m

2 Test Configuration of Equipment Under Test

2.1 RF Output Power

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	2.07 dBm	0.47 dBm	0.68 dBm
Ch39	2441MHz	2.20 dBm	0.49 dBm	0.77 dBm
Ch78	2480MHz	1.46 dBm	-0.21 dBm	-0.04 dBm

Remark:

1. The data rate was set in 1Mbps for all the test items due to the highest RF output power.
2. The EUT is programmed to transmit signals continuously for all testing.

2.2 Test Mode


The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The following tables are showing the test modes as the worst cases and recorded in this report.


Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth 1Mbps GFSK	Bluetooth EDR 2Mbps π /4-DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted TCs	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated TCs	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	N/A	N/A
AC Conducted Emission	Mode 1 :GSM850 Idle + Bluetooth Link + WLAN Link + MPEG4 + Earphone + Adapter		
Remark: For radiated TCs, the data rate was set in 1Mbps due to the highest RF output power; only the data of these modes was reported.			

2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

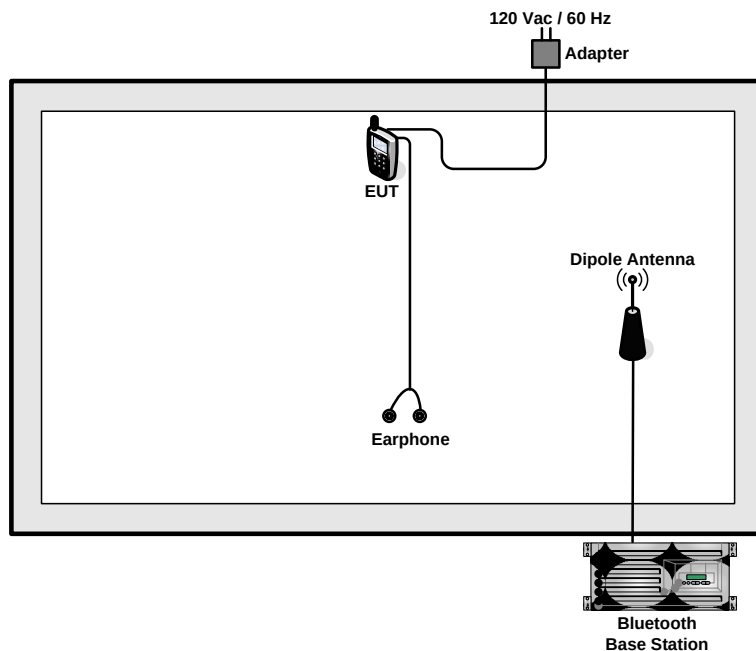

<EUT with Adapter Mode>

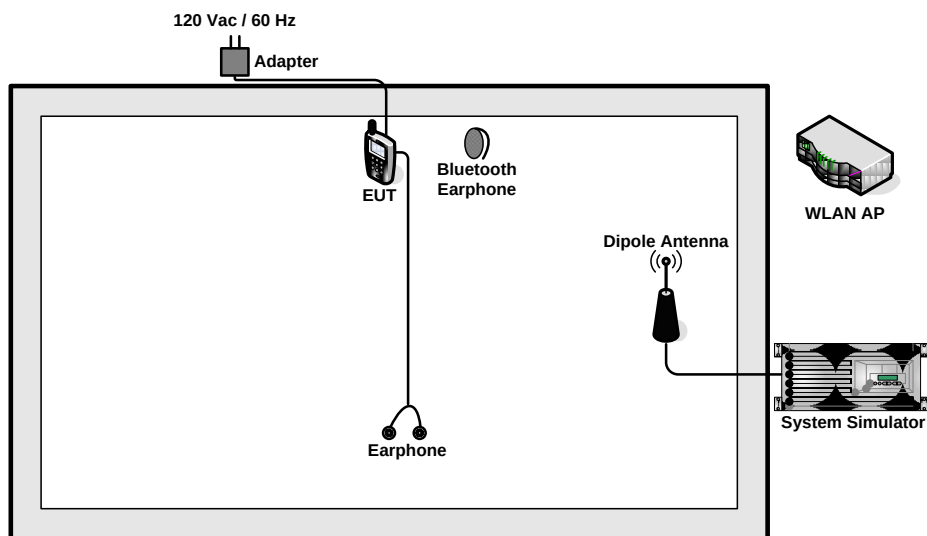

2.4 RF Utility

For Bluetooth function, the RF utility, "Hypertext" was installed in notebook which was programmed to make the EUT into the engineering modes to contact with Bluetooth base station for transmitting and receiving signals continuously.

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The modulation types of EUT are irrelevant to number of hopping channels deviation.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = the frequency band of operation; $RBW \geq 1\%$ of the span; $VBW \geq RBW$; Sweep = auto;
Detector function = peak; Trace = max hold.
5. The number of hopping frequency used is defined as the device has the numbers of total channel.


3.1.4 Test Setup

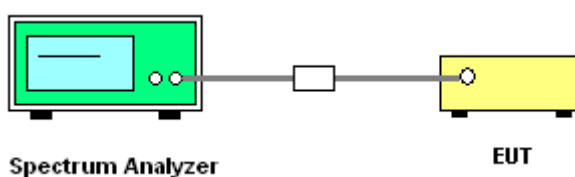

3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	Mode 1~3	Temperature :	26~28℃
Test Engineer :	Ken Hsu	Relative Humidity :	51~54%
Number of Hopping Channels (Channel)		Limits (Channel)	Pass/Fail
79		> 15	Pass

Number of Hopping Channel Plot on Channel 00 - 78

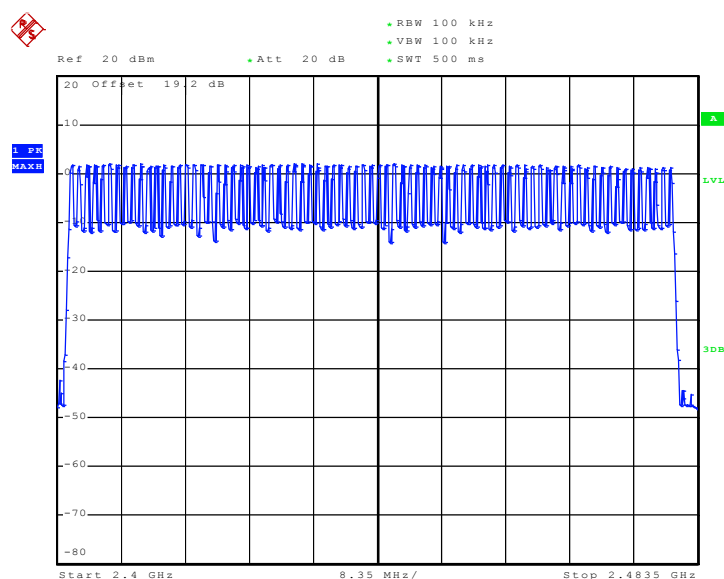

Date: 5.JUN.2010 16:44:29

3.2 20dB and 99% Bandwidth Measurement

3.2.1 Limit of 20dB Bandwidth

N/A


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

3.2.4 Test Setup

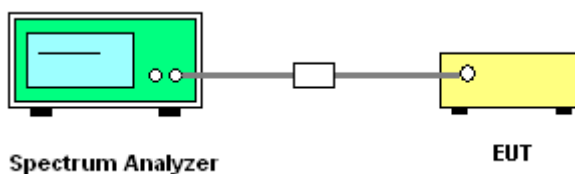


3.2.5 Test Result of 20dB Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	26~28℃
Test Engineer :	Ken Hsu	Relative Humidity :	51~54%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.940
39	2441	0.940
78	2480	0.938


20 dB Bandwidth Plot on Channel 00

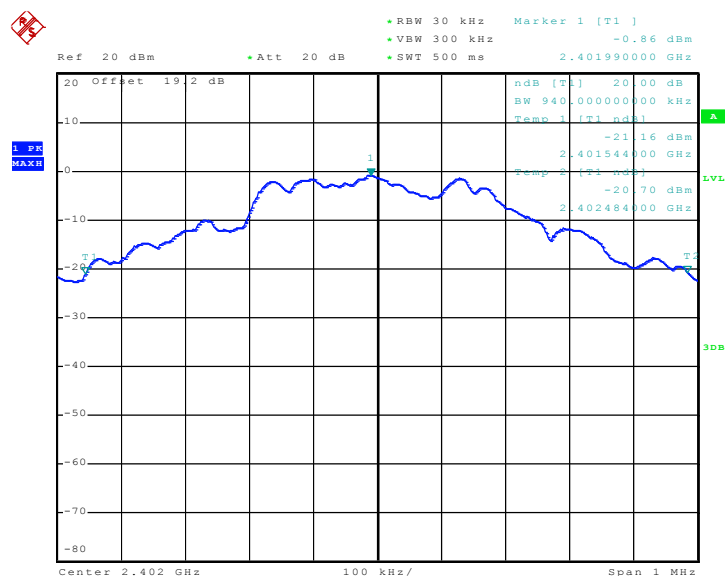

Date: 5.JUN.2010 15:49:08




20 dB Bandwidth Plot on Channel 39

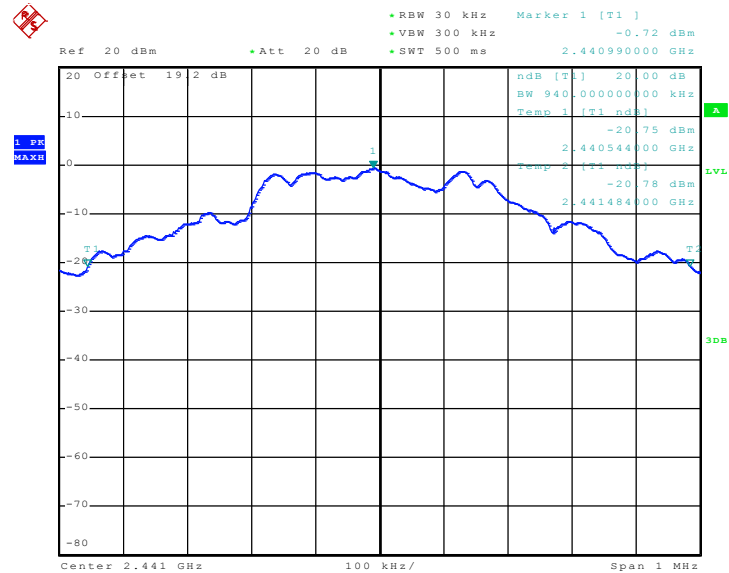

Date: 5.JUN.2010 15:49:32


20 dB Bandwidth Plot on Channel 78

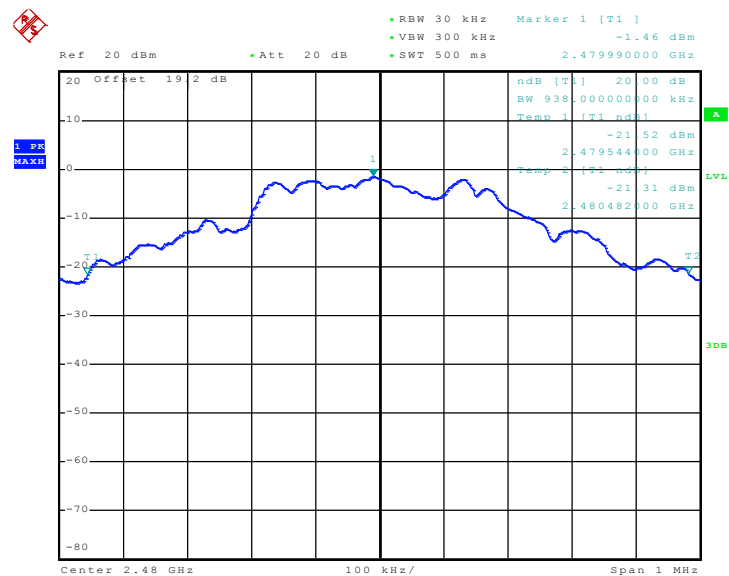

Date: 5.JUN.2010 15:49:51

Test Mode :	Mode 4, 5, 6	Temperature :	26~28°C
Test Engineer :	Ken Hsu	Relative Humidity :	51~54%


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.348
39	2441	1.352
78	2480	1.356

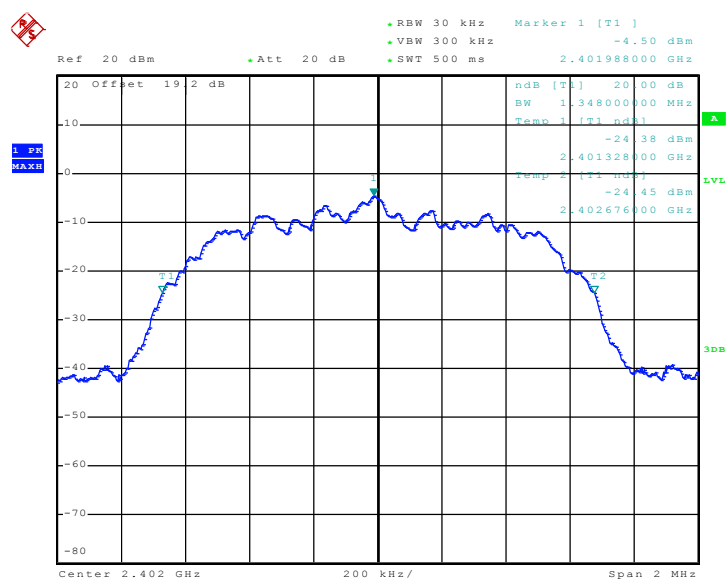20 dB Bandwidth Plot on Channel 00


Date: 5.JUN.2010 15:50:30




20 dB Bandwidth Plot on Channel 39

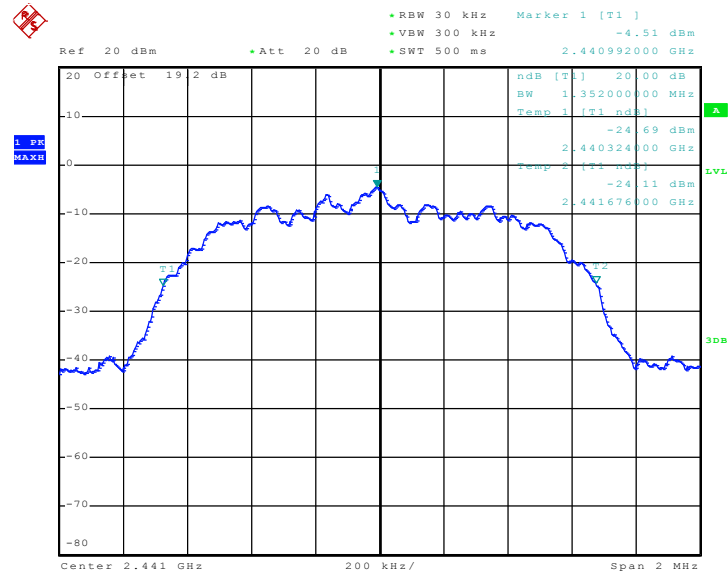

Date: 5.JUN.2010 15:50:47


20 dB Bandwidth Plot on Channel 78

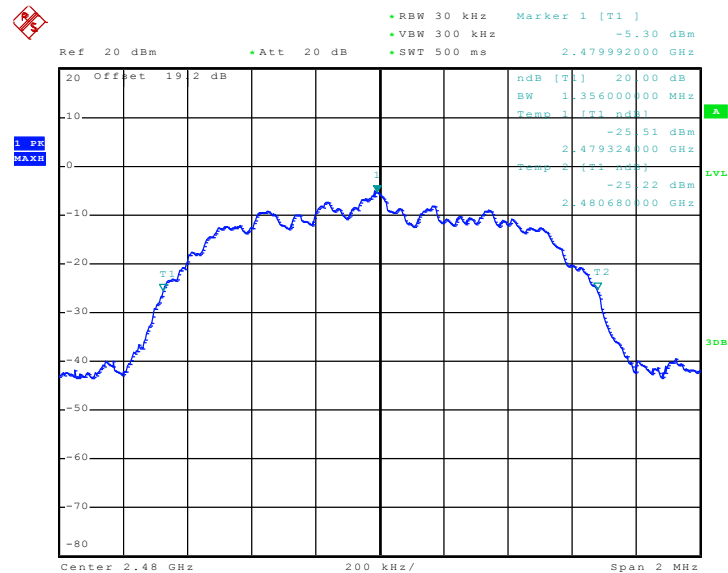

Date: 5.JUN.2010 15:51:00

Test Mode :	Mode 7, 8, 9	Temperature :	26~28°C
Test Engineer :	Ken Hsu	Relative Humidity :	51~54%


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.336
39	2441	1.332
78	2480	1.340

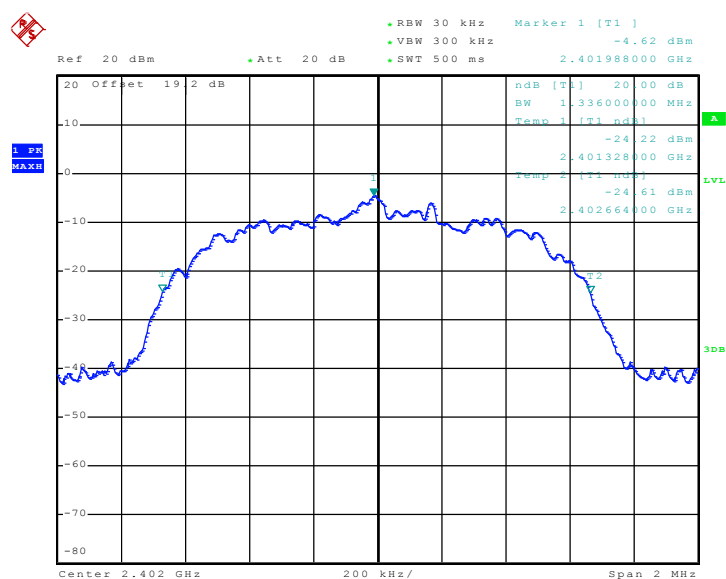20 dB Bandwidth Plot on Channel 00


Date: 5.JUN.2010 15:51:23




20 dB Bandwidth Plot on Channel 39

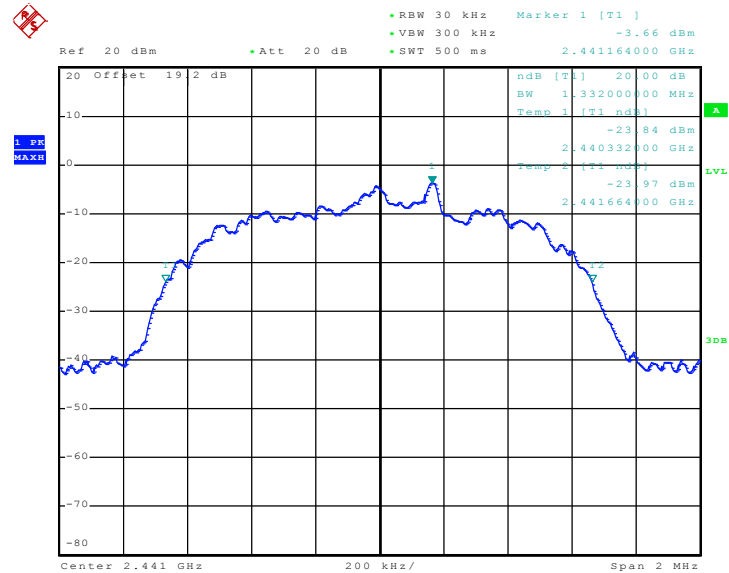

Date: 5.JUN.2010 15:51:41

20 dB Bandwidth Plot on Channel 78

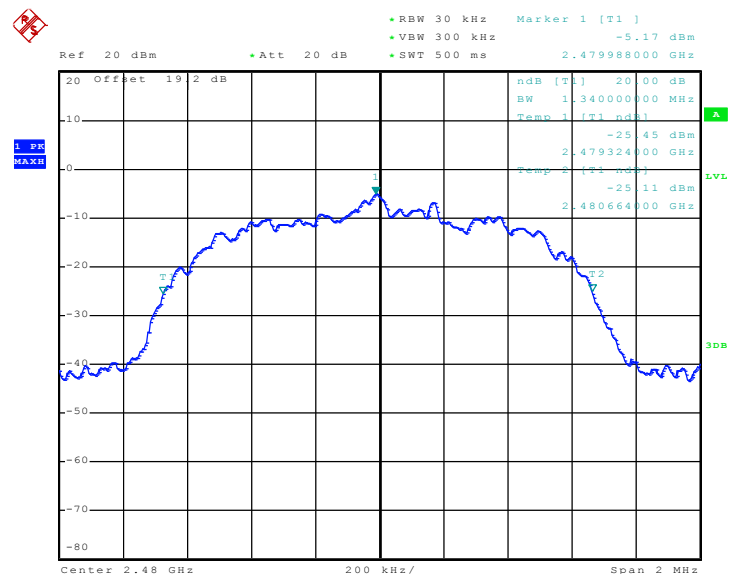


Date: 5.JUN.2010 15:52:02

3.2.6 Test Result of 99% Occupied Bandwidth


Test Mode :	Mode 1, 2, 3	Temperature :	26~28℃
Test Engineer :	Ken Hsu	Relative Humidity :	51~54%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	0.798
39	2441	0.798
78	2480	0.798


99% Bandwidth Plot on Channel 00

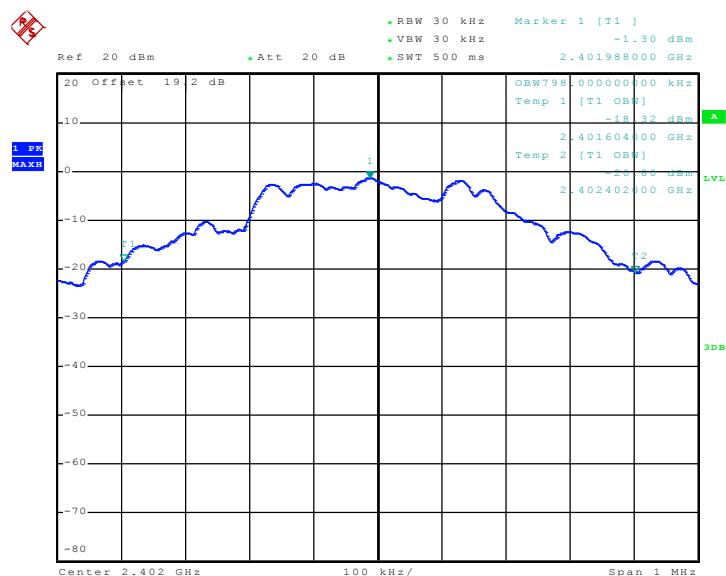

Date: 5.JUN.2010 15:56:27

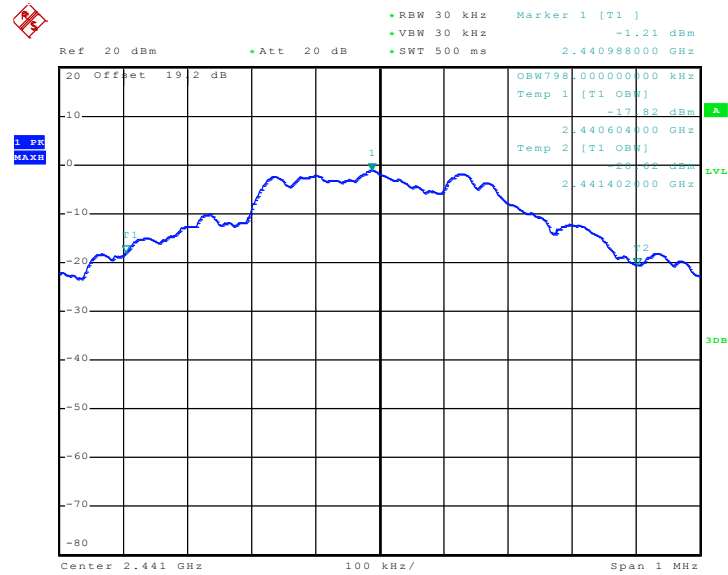99% Occupied Bandwidth Plot on Channel 39


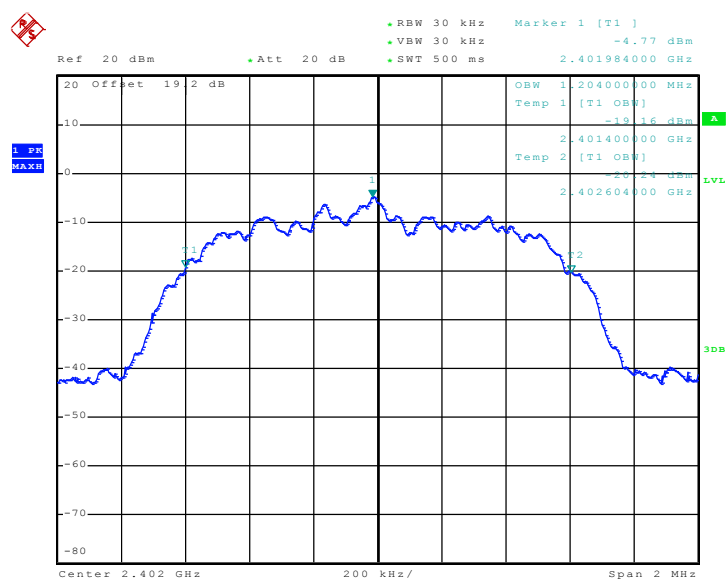
Date: 5.JUN.2010 15:55:51

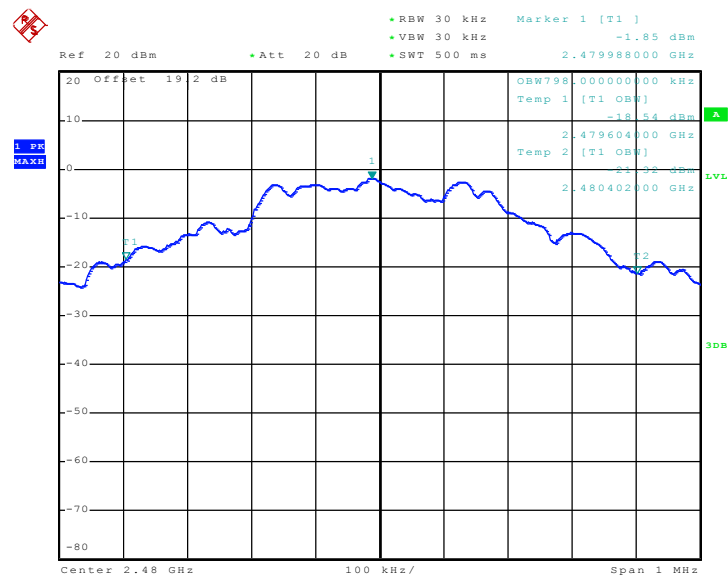99% Occupied Bandwidth Plot on Channel 78


Date: 5.JUN.2010 15:55:15


Test Mode :	Mode 4, 5, 6	Temperature :	26~28°C
Test Engineer :	Ken Hsu	Relative Humidity :	51~54%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.204
39	2441	1.204
78	2480	1.204

99% Bandwidth Plot on Channel 00


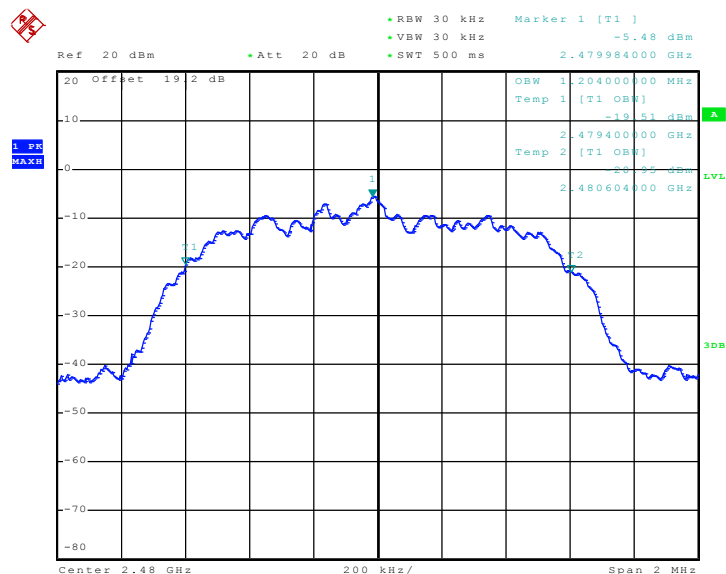
Date: 5.JUN.2010 15:53:57

99% Occupied Bandwidth Plot on Channel 39

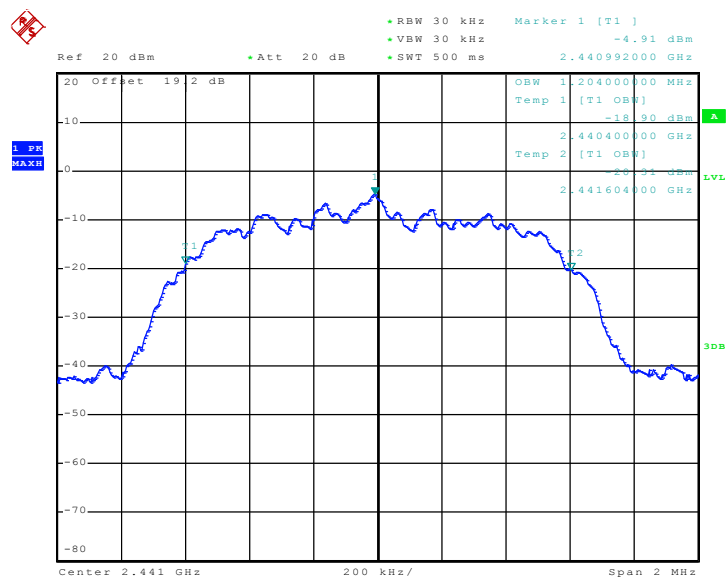

Date: 5.JUN.2010 15:54:19


99% Occupied Bandwidth Plot on Channel 78




Date: 5.JUN.2010 15:54:40

Test Mode :	Mode 7, 8, 9	Temperature :	26~28℃
Test Engineer :	Ken Hsu	Relative Humidity :	51~54%


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.212
39	2441	1.204
78	2480	1.212

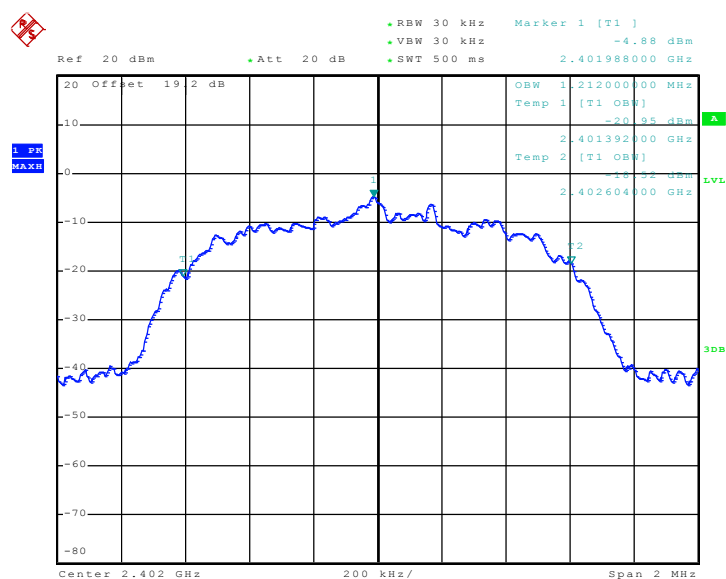99% Bandwidth Plot on Channel 00


Date: 5.JUN.2010 15:53:23

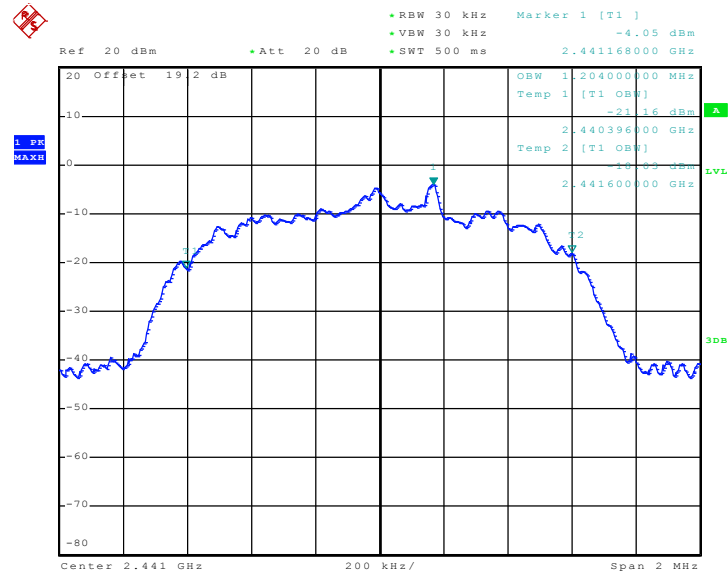99% Occupied Bandwidth Plot on Channel 39


Date: 5.JUN.2010 15:52:53

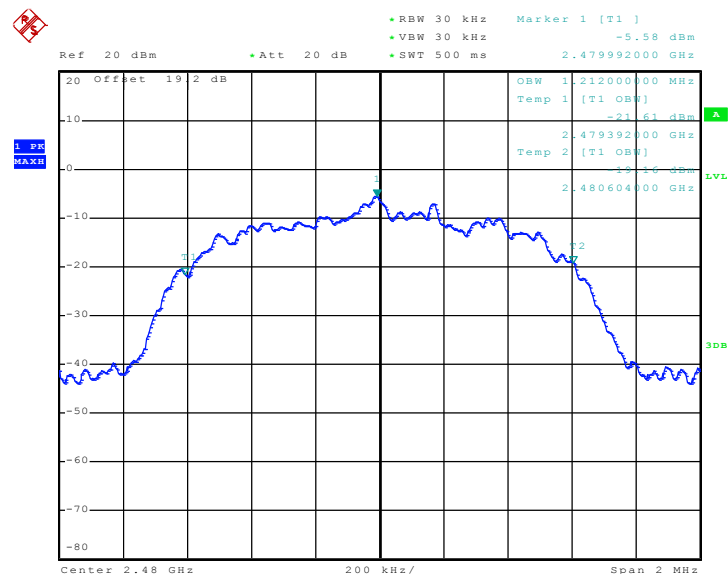99% Occupied Bandwidth Plot on Channel 78


Date: 5.JUN.2010 15:52:33

3.3 Hopping Channel Separation Measurement

3.3.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. Please refer FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; $RBW \geq 1\%$ of the span;
VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

3.3.4 Test Setup

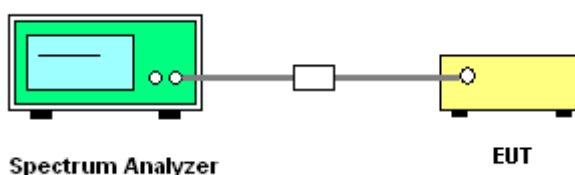


3.3.5 Test Result of Hopping Channel Separation

Test Mode :	Mode 1, 2, 3	Temperature :	26~28℃
Test Engineer :	Ken Hsu	Relative Humidity :	51~54%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.004	0.626	Pass
39	2441	1.000	0.626	Pass
78	2480	1.000	0.625	Pass


Channel Separation Plot on Channel 00 - 01

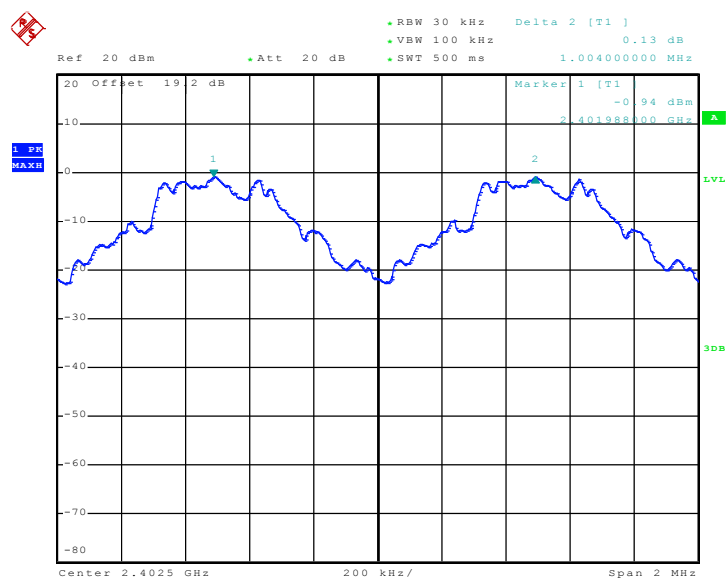

Date: 5.JUN.2010 16:26:15




Channel Separation Plot on Channel 39 - 40

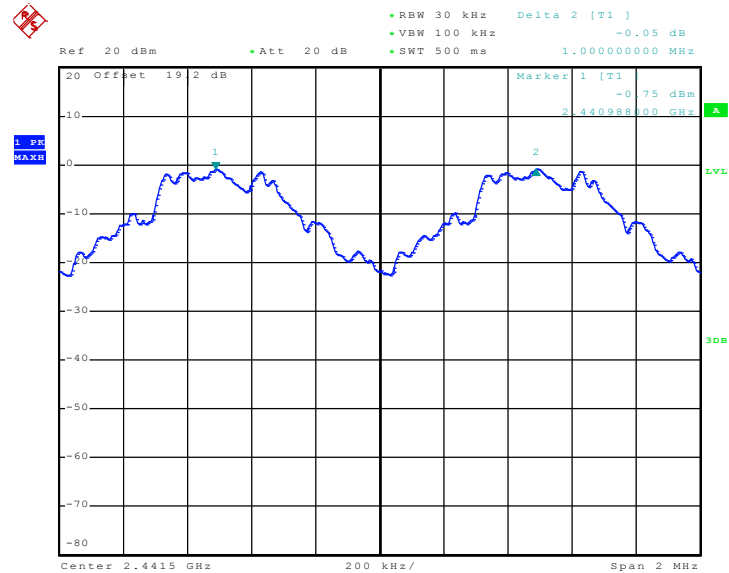

Date: 5.JUN.2010 16:26:40

Channel Separation Plot on Channel 77 - 78

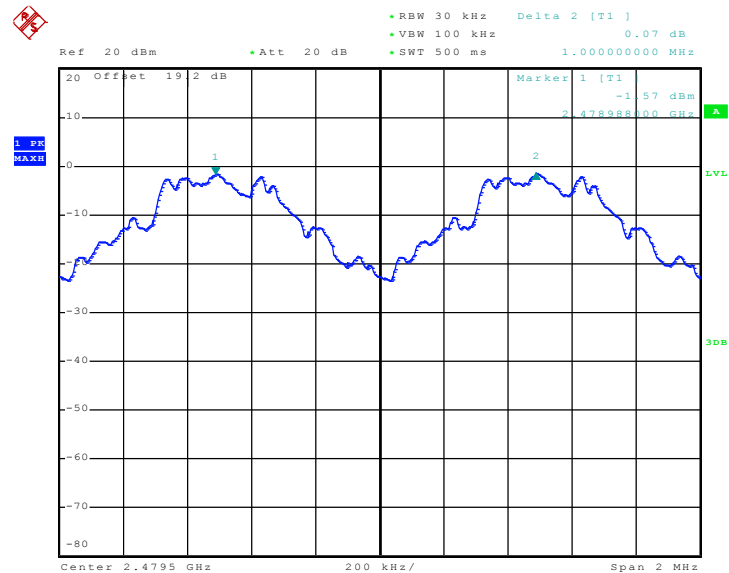

Date: 5.JUN.2010 16:27:00

3.4 Dwell Time Measurement

3.4.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to calculate the dwell time.

3.4.4 Test Setup

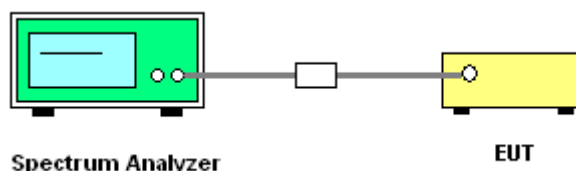

3.4.5 Test Result of Dwell Time

Test Mode :	Mode 2	Temperature :	26~28℃
Test Engineer :	Ken Hsu	Relative Humidity :	51~54%


Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
DH5	4.00	2980.00	0.38	0.4	Pass

Remark:

1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79 channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. t: Package Transfer Time(us)




DH5 Dwell Time (One Pulse) Plot on Channel 39

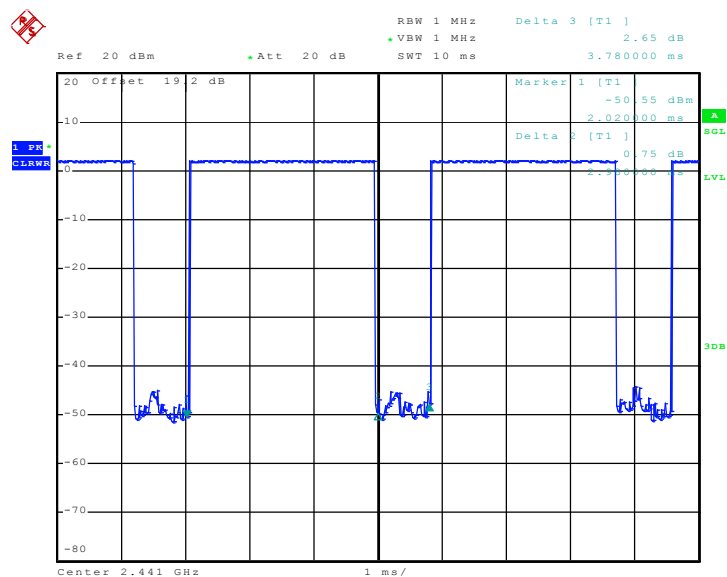

Date: 5.JUN.2010 16:33:25

DH5 Dwell Time (Count Pulses) Plot on Channel 39

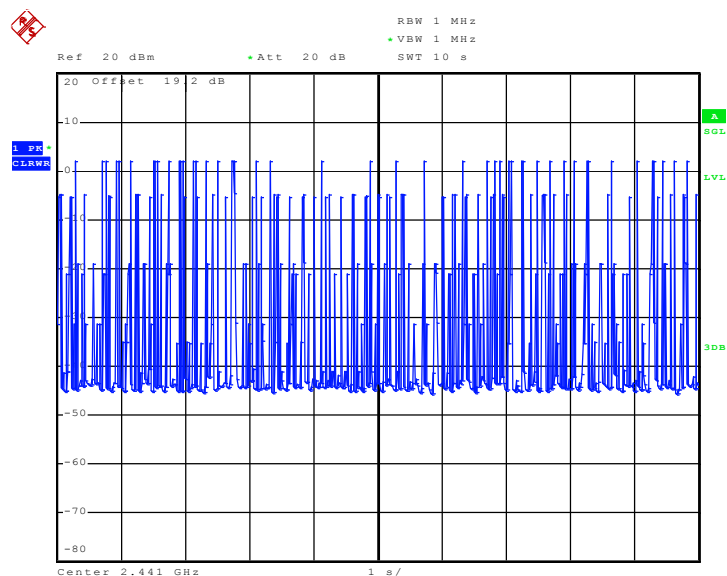

Date: 5.JUN.2010 16:37:27

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1W (30 dBm).


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.

3.5.4 Test Setup

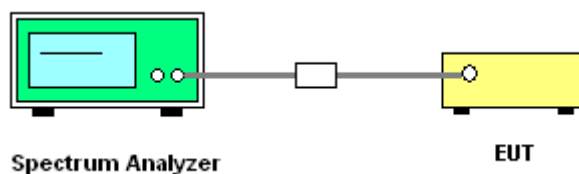


3.5.5 Test Result of Peak Output Power

Test Mode :	Mode 1, 2, 3	Temperature :	26~28℃
Test Engineer :	Ken Hsu	Relative Humidity :	51~54%


Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	2.07	30	Pass
39	2441	2.20	30	Pass
78	2480	1.46	30	Pass

Peak Output Power Plot on Channel 00

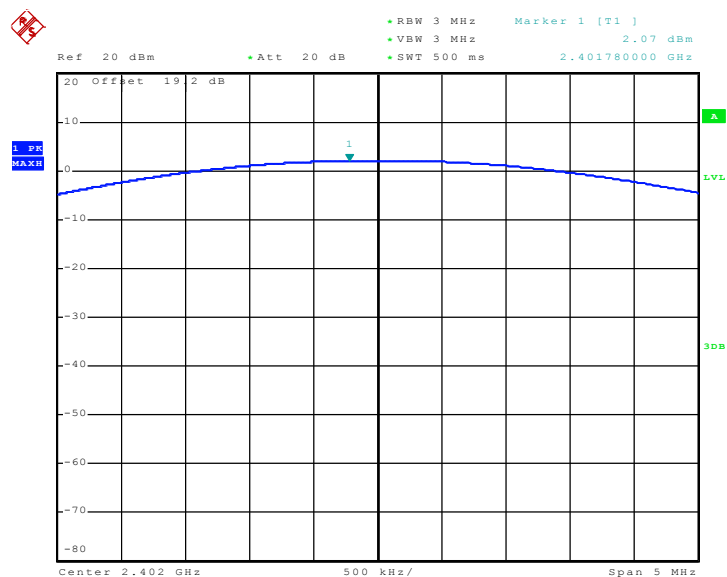

Date: 5.JUN.2010 15:25:21


Peak Output Power Plot on Channel 39

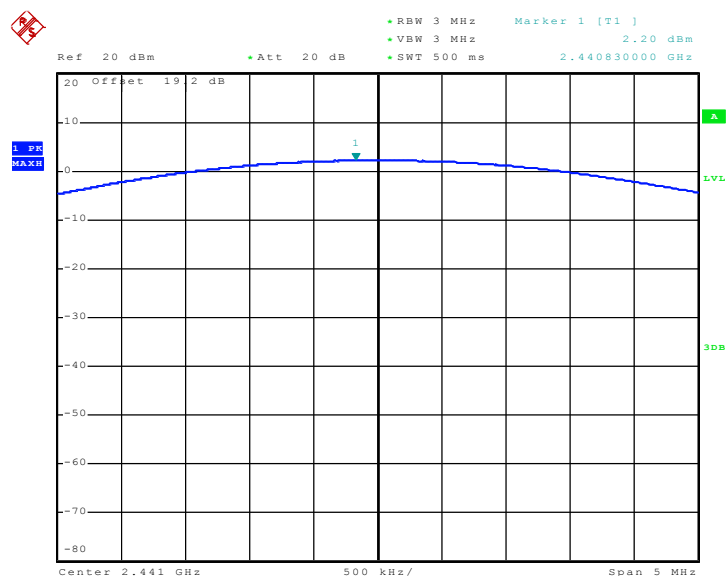

Date: 5.JUN.2010 15:35:16



Peak Output Power Plot on Channel 78

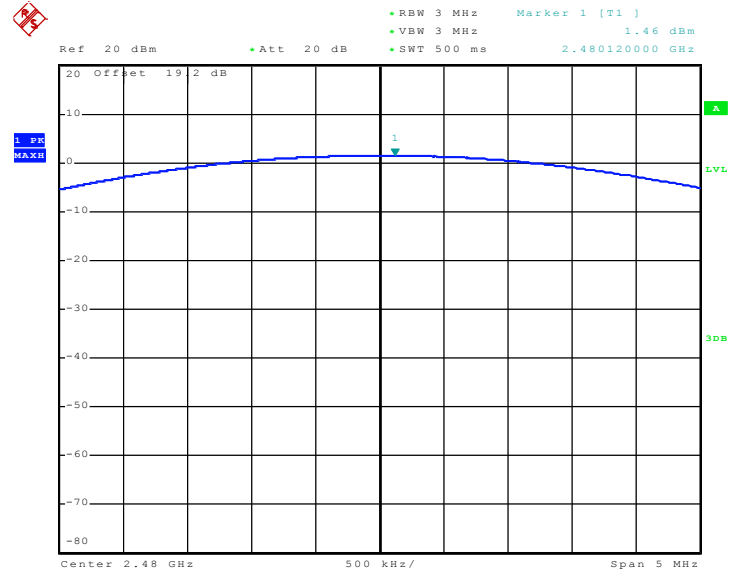

Date: 5.JUN.2010 15:36:47

3.6 Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

3.6.2 Measuring Instruments


See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC Public Notice DA 00-705 Measurement Guidelines.
2. RF antenna conducted test: Set RBW = 300kHz, Video bandwidth (VBW) $\geq$ RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300k Hz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Applies to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 1MHz, Sweep: Auto for Peak; set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto for Average. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation. See FCC Section 15.35(b) and (c).
4. In case the emission is fail due to the used RBW / VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.

3.6.4 Test Setup

<Radiated Band Edges>

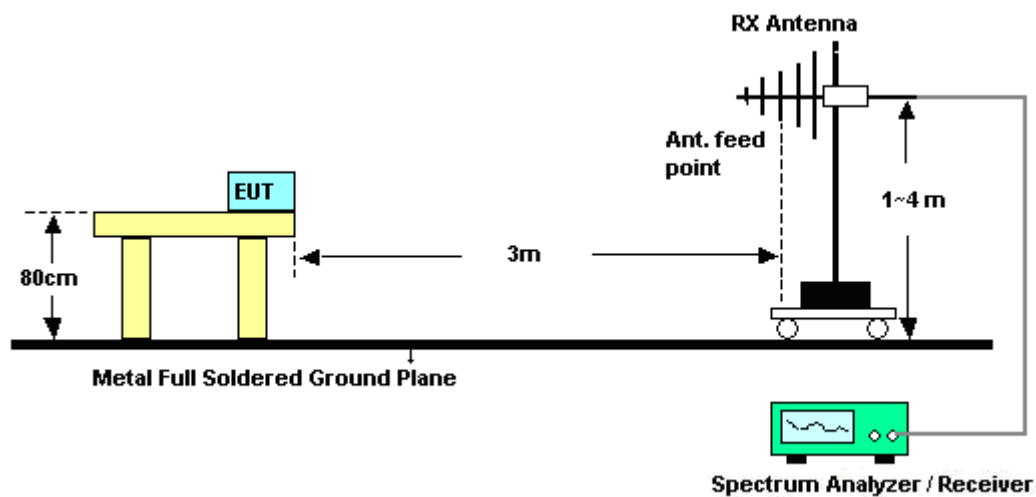

<Conducted Band Edges>

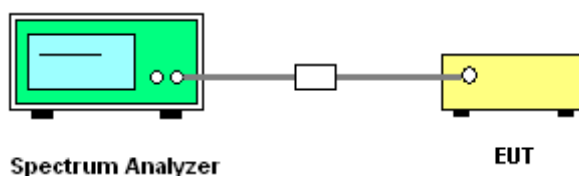

3.6.5 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	24~25°C
Test Channel :	00	Relative Humidity :	43~44%
		Test Engineer :	Kay Wu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2384.86	52.44	-21.56	74	49.01	32.11	5.47	34.15	103	349	Peak
2384.86	37.02	-16.98	54	33.59	32.11	5.47	34.15	103	349	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2383.34	49.27	-24.73	74	45.84	32.11	5.47	34.15	100	311	Peak
2383.34	35.19	-18.81	54	31.76	32.11	5.47	34.15	100	311	Average

Test Mode :	Mode 3	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	43~44%
		Test Engineer :	Kay Wu


ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	63.39	-10.61	74	59.93	32.27	5.38	34.19	124	336	Peak
2483.5	45.48	-8.52	54	42.02	32.27	5.38	34.19	124	336	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	61.21	-12.79	74	57.75	32.27	5.38	34.19	100	308	Peak
2483.5	50.4	-3.6	54	46.94	32.27	5.38	34.19	100	308	Average

3.6.6 Test Result of Conducted Band Edges


Test Mode :	Mode 1 and 3	Temperature :	26~28℃
Test Channel :	00 and 78	Relative Humidity :	51~54%
		Test Engineer :	Ken Hsu

Low Band Edge Plot on Channel 00

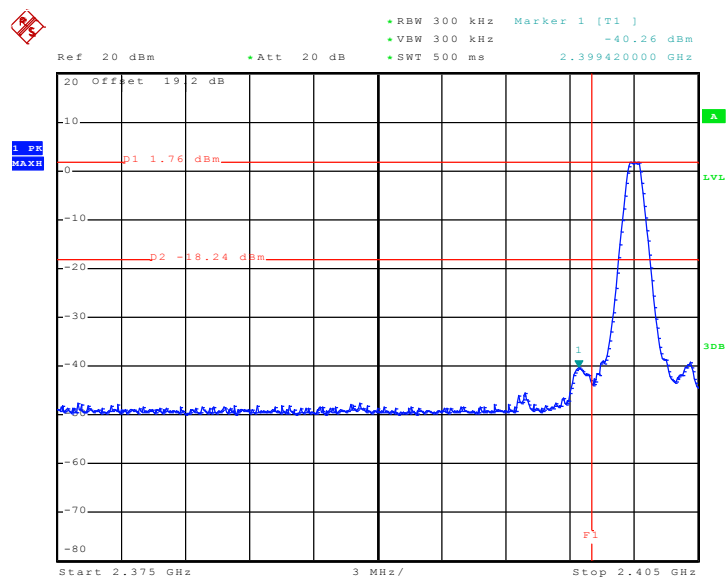

Date: 5.JUN.2010 16:12:35

High Band Edge Plot on Channel 78

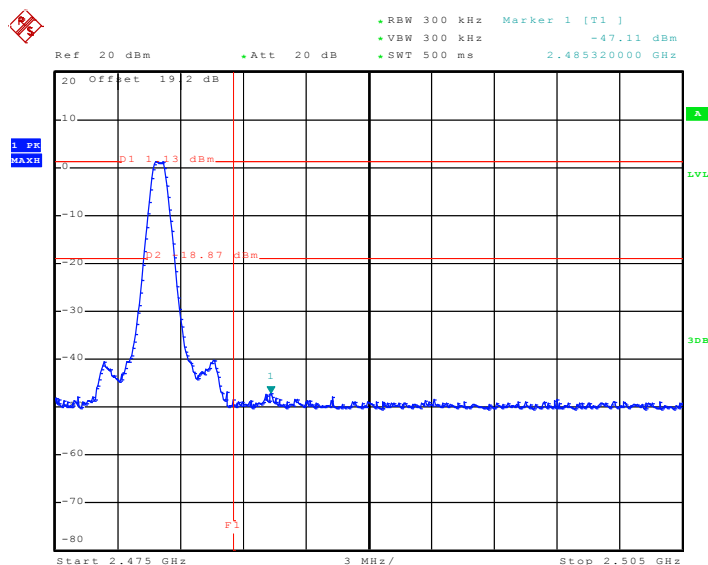

Date: 5.JUN.2010 16:24:41

3.7 AC Conducted Emission Measurement

3.7.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

3.7.3 Test Procedures


1. Please follow the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.7.4 Test Setup

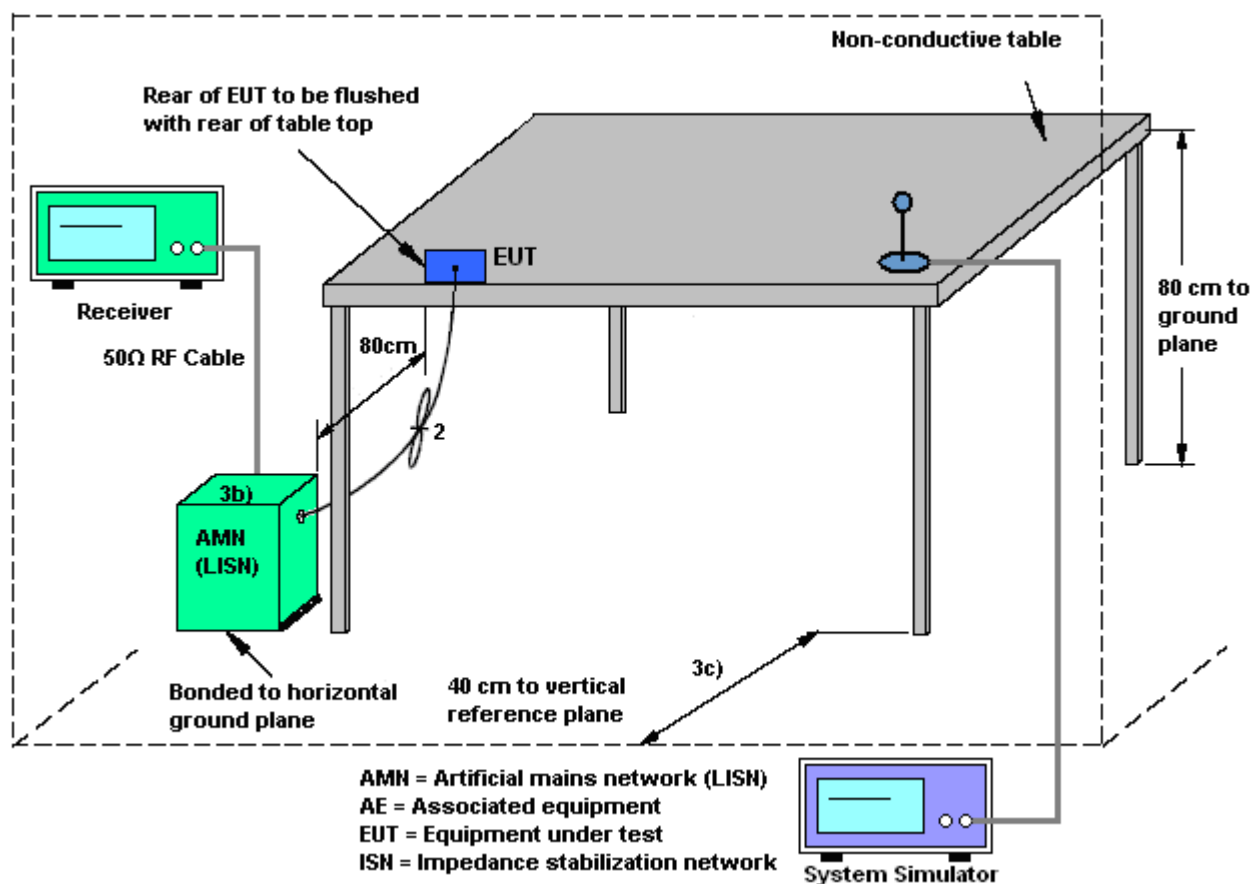

3.7.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22℃
Test Engineer :	Novic Jiang	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + MPEG4 + Earphone + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

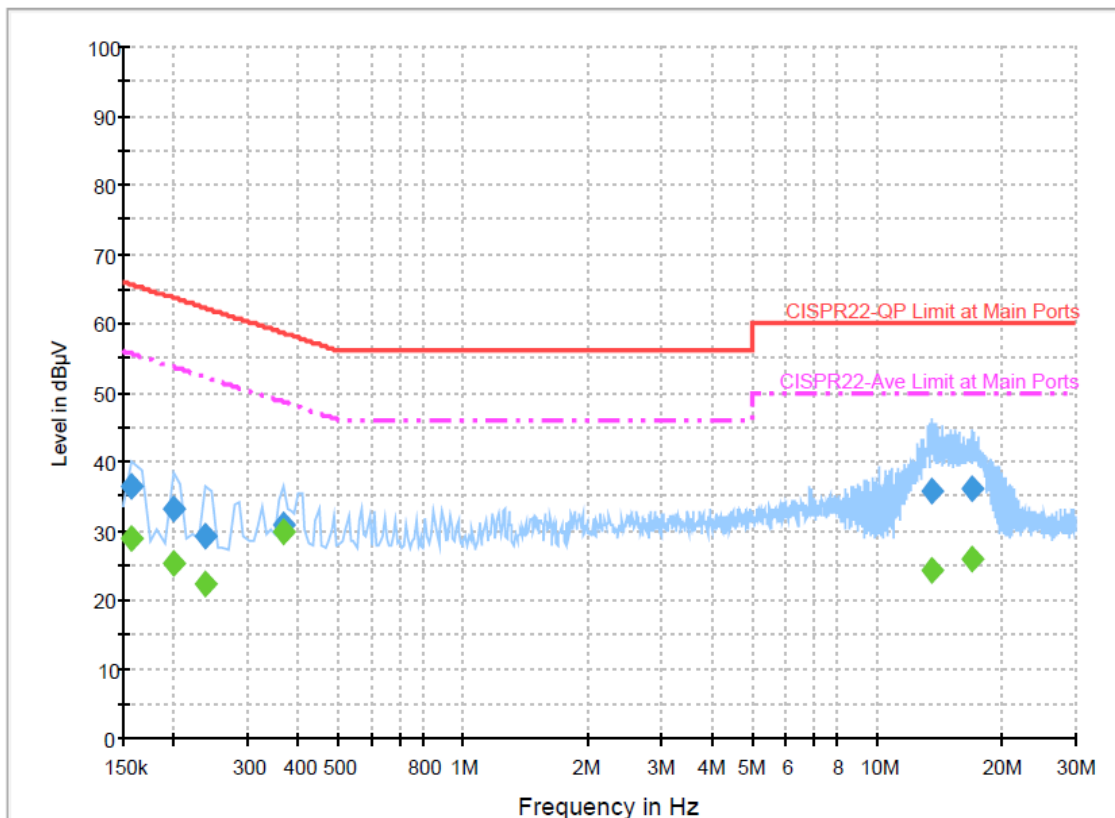


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158000	36.5	Off	L1	19.3	29.1	65.6
0.198000	33.1	Off	L1	19.3	30.6	63.7
0.238000	29.2	Off	L1	19.4	33.0	62.2
0.366000	30.9	Off	L1	19.3	27.7	58.6
13.446000	35.6	Off	L1	19.7	24.4	60.0
16.790000	36.0	Off	L1	19.7	24.0	60.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158000	29.0	Off	L1	19.3	26.6	55.6
0.198000	25.3	Off	L1	19.3	28.4	53.7
0.238000	22.4	Off	L1	19.4	29.8	52.2
0.366000	29.7	Off	L1	19.3	18.9	48.6
13.446000	24.3	Off	L1	19.7	25.7	50.0
16.790000	25.9	Off	L1	19.7	24.1	50.0

Test Mode :	Mode 1	Temperature :	20~22℃
Test Engineer :	Novic Jiang	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + MPEG4 + Earphone + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

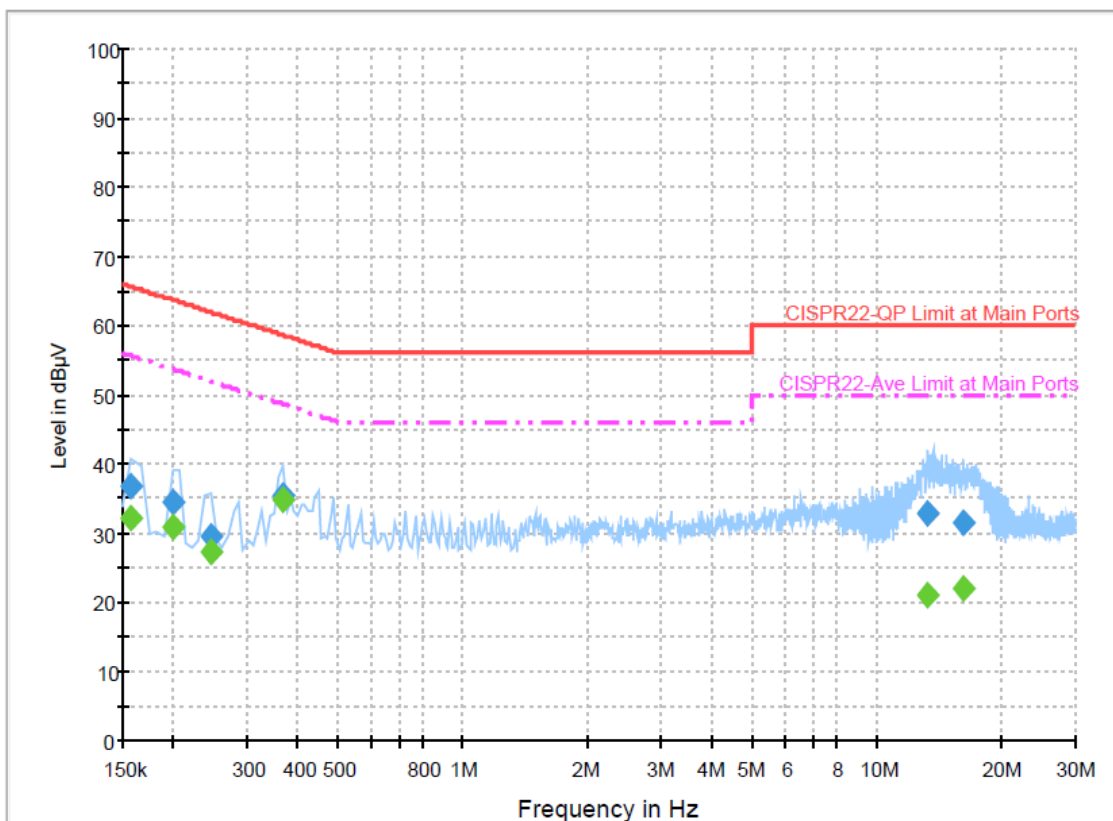
Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158000	36.9	Off	N	19.4	28.7	65.6
0.198000	34.4	Off	N	19.3	29.3	63.7
0.246000	29.5	Off	N	19.4	32.4	61.9
0.366000	35.4	Off	N	19.3	23.2	58.6
13.254000	32.8	Off	N	19.8	27.2	60.0
16.150000	31.6	Off	N	19.8	28.4	60.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158000	32.3	Off	N	19.4	23.3	55.6
0.198000	30.9	Off	N	19.3	22.8	53.7
0.246000	27.1	Off	N	19.4	24.8	51.9
0.366000	34.7	Off	N	19.3	13.9	48.6
13.254000	20.9	Off	N	19.8	29.1	50.0
16.150000	22.0	Off	N	19.8	28.0	50.0

3.8 Radiated Emission Measurement

3.8.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments


See list of measuring instruments of this test report.

3.8.3 Test Procedures


- The testing follows the guidelines in FCC Public Notice DA 00-705 Measurement Guidelines.
- Use the following spectrum analyzer settings:
 - Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
 - Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.
Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB)
- Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

3.8.4 Test Setup

For radiated emissions below 30MHz

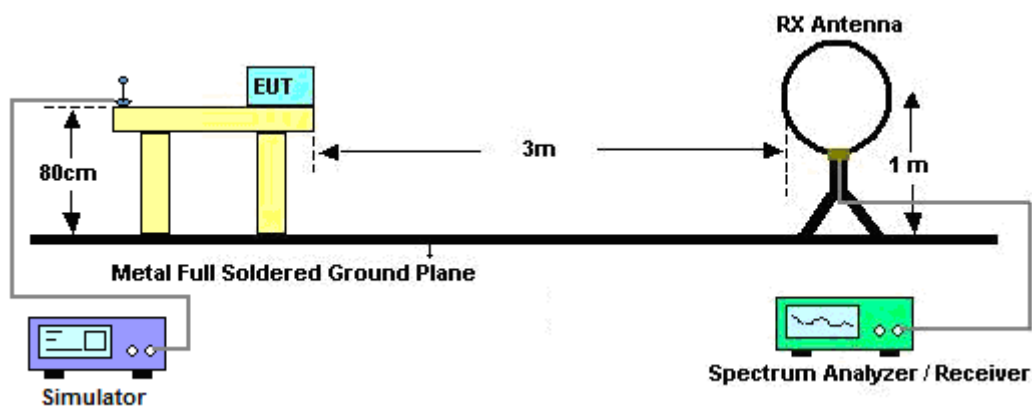

For radiated emissions above 30MHz

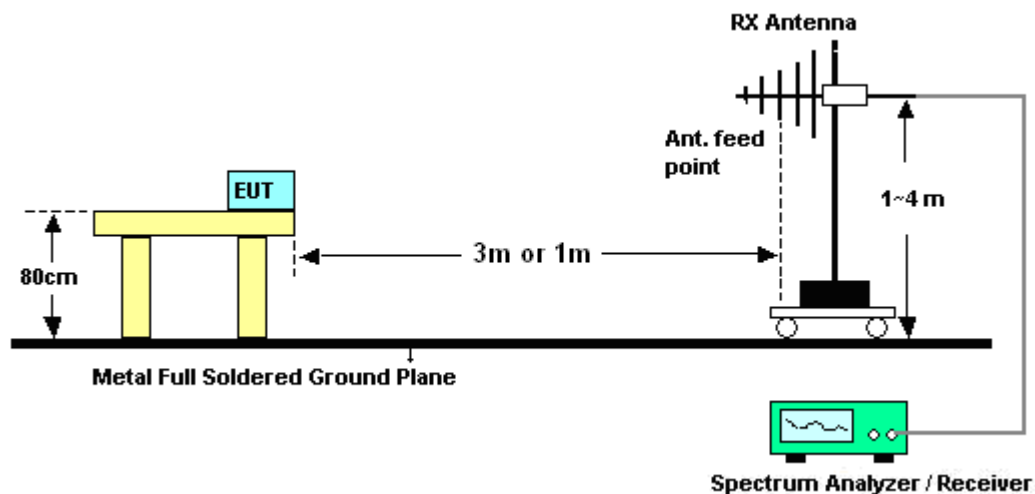

3.8.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

Test Engineer :	Kay Wu	Temperature :	24~25°C	
		Relative Humidity :	43~44%	

Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.8.6 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	Mode 1	Temperature :	24~25°C
Test Channel :	00	Relative Humidity :	43~44%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	2402 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	21.6	-18.4	40	33.02	19.51	0.53	31.46	-	-	Peak
146.37	23.2	-20.3	43.5	42.17	11.38	1.21	31.56	-	-	Peak
210.9	29.17	-14.33	43.5	50.3	8.98	1.36	31.47	100	108	Peak
645.8	22.68	-23.32	46	30.3	20.42	2.83	30.87	-	-	Peak
806.1	23.95	-22.05	46	29.2	22.28	3.16	30.69	-	-	Peak
911.8	25.47	-20.53	46	29.41	23.36	3.37	30.67	-	-	Peak
2384.86	52.44	-21.56	74	49.01	32.11	5.47	34.15	103	349	Peak
2384.86	37.02	-16.98	54	33.59	32.11	5.47	34.15	103	349	Average
2402	101.96	-	-	98.52	32.16	5.44	34.16	103	349	Peak
2402	86.06	-	-	82.63	32.13	5.46	34.16	103	349	Average
2484	32.27	-21.73	54	28.81	32.27	5.38	34.19	103	349	Average
2484	44.41	-29.59	74	40.95	32.27	5.38	34.19	103	349	Peak
8298	54.38	-19.62	74	43.44	36	10.04	35.1	100	251	Peak
8298	41.19	-12.81	54	30.25	36	10.04	35.1	100	251	Average

Test Mode :	Mode 1	Temperature :	24~25°C
Test Channel :	00	Relative Humidity :	43~44%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	2402 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
36.21	28.88	-11.12	40	43.57	16.2	0.59	31.48	100	281	Peak
96.42	22.66	-20.84	43.5	43.45	9.76	0.98	31.53	-	-	Peak
200.37	30.15	-13.35	43.5	51.49	8.82	1.32	31.48	-	-	Peak
640.9	22.74	-23.26	46	30.43	20.38	2.81	30.88	-	-	Peak
763.4	24.59	-21.41	46	30.49	21.71	3.08	30.69	-	-	Peak
903.4	26.3	-19.7	46	30.42	23.22	3.35	30.69	-	-	Peak
2383.34	49.27	-24.73	74	45.84	32.11	5.47	34.15	100	311	Peak
2383.34	35.19	-18.81	54	31.76	32.11	5.47	34.15	100	311	Average
2402	98.96	-	-	95.52	32.16	5.44	34.16	100	311	Peak
2402	84.58	-	-	81.15	32.13	5.46	34.16	100	311	Average
2494	32.22	-21.78	54	28.75	32.3	5.37	34.2	100	311	Average
2494	44.06	-29.94	74	40.59	32.3	5.37	34.2	100	311	Peak
8385	54.69	-19.31	74	43.69	36	10.1	35.1	100	158	Peak
8385	42.02	-11.98	54	31.02	36	10.1	35.1	100	158	Average

Test Mode :	Mode 2	Temperature :	24~25°C
Test Channel :	39	Relative Humidity :	43~44%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	2441 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
34.86	21.3	-18.7	40	35.46	16.73	0.58	31.47	-	-	Peak
139.89	23.14	-20.36	43.5	41.79	11.7	1.2	31.55	-	-	Peak
212.25	29.3	-14.2	43.5	50.38	9.02	1.37	31.47	100	182	Peak
581.4	22.59	-23.41	46	31.19	19.7	2.64	30.94	-	-	Peak
817.3	24.35	-21.65	46	29.47	22.39	3.19	30.7	-	-	Peak
942.6	25.97	-20.03	46	29.29	23.83	3.44	30.59	-	-	Peak
2326	45.54	-28.46	74	42.14	32.02	5.51	34.13	130	340	Peak
2326	32.79	-21.21	54	29.39	32.02	5.51	34.13	130	340	Average
2441	101.38	-	-	97.92	32.22	5.41	34.17	130	340	Peak
2441	86.35	-	-	82.9	32.22	5.41	34.18	130	340	Average
2486	44.62	-29.38	74	41.16	32.27	5.38	34.19	130	340	Peak
2486	32.25	-21.75	54	28.79	32.27	5.38	34.19	130	340	Average
8421	54.13	-19.87	74	43.1	36	10.13	35.1	100	315	Peak
8421	42.03	-11.97	54	31	36	10.13	35.1	100	315	Average

Test Mode :	Mode 2	Temperature :	24~25°C
Test Channel :	39	Relative Humidity :	43~44%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	2441 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
36.21	29.02	-10.98	40	43.71	16.2	0.59	31.48	100	241	Peak
94.53	23	-20.5	43.5	43.94	9.61	0.98	31.53	-	-	Peak
190.65	29.63	-13.87	43.5	50.95	8.91	1.28	31.51	-	-	Peak
645.8	22.47	-23.53	46	30.09	20.42	2.83	30.87	-	-	Peak
816.6	24.53	-21.47	46	29.67	22.38	3.18	30.7	-	-	Peak
906.9	25.5	-20.5	46	29.54	23.28	3.36	30.68	-	-	Peak
2350	44.59	-29.41	74	41.18	32.05	5.5	34.14	100	326	Peak
2350	32.78	-21.22	54	29.37	32.05	5.5	34.14	100	326	Average
2441	98.41	-	-	94.96	32.22	5.41	34.18	100	326	Peak
2441	84.02	-	-	80.57	32.22	5.41	34.18	100	326	Average
2484	43.88	-30.12	74	40.42	32.27	5.38	34.19	100	326	Peak
2484	32.23	-21.77	54	28.77	32.27	5.38	34.19	100	326	Average
8373	54.06	-19.94	74	43.06	36	10.1	35.1	100	215	Peak
8373	41.49	-12.51	54	30.49	36	10.1	35.1	100	215	Average

Test Mode :	Mode 3	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	43~44%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	2480 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.89	21.5	-18.5	40	34.01	18.4	0.55	31.46	-	-	Peak
146.37	23.09	-20.41	43.5	42.06	11.38	1.21	31.56	-	-	Peak
212.25	29.16	-14.34	43.5	50.24	9.02	1.37	31.47	100	159	Peak
693.4	23.03	-22.97	46	30.14	20.79	2.93	30.83	-	-	Peak
859.3	25.23	-20.77	46	29.88	22.79	3.28	30.72	-	-	Peak
931.4	26.02	-19.98	46	29.57	23.65	3.42	30.62	-	-	Peak
2350	44.47	-29.53	74	41.06	32.05	5.5	34.14	124	336	Peak
2350	32.85	-21.15	54	29.44	32.05	5.5	34.14	124	336	Average
2480	99.33	-	-	95.87	32.27	5.38	34.19	124	336	Peak
2480	84.81	-	-	81.35	32.27	5.38	34.19	124	336	Average
2483.5	63.39	-10.61	74	59.93	32.27	5.38	34.19	124	336	Peak
2483.5	45.48	-8.52	54	42.02	32.27	5.38	34.19	124	336	Average
8382	54.15	-19.85	74	43.15	36	10.1	35.1	100	111	Peak
8382	42.21	-11.79	54	31.21	36	10.1	35.1	100	111	Average

Test Mode :	Mode 3	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	43~44%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	2480 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
36.21	29.25	-10.75	40	43.94	16.2	0.59	31.48	100	244	Peak
96.42	22.93	-20.57	43.5	43.72	9.76	0.98	31.53	-	-	Peak
201.18	30.02	-13.48	43.5	51.36	8.82	1.32	31.48	-	-	Peak
587	20.88	-25.12	46	29.36	19.81	2.65	30.94	-	-	Peak
766.2	23.56	-22.44	46	29.41	21.75	3.09	30.69	-	-	Peak
903.4	27.41	-18.59	46	31.53	23.22	3.35	30.69	-	-	Peak
2334	44.31	-29.69	74	40.91	32.02	5.51	34.13	100	308	Peak
2334	32.75	-21.25	54	29.35	32.02	5.51	34.13	100	308	Average
2480	96.92	-	-	93.46	32.27	5.38	34.19	100	308	Peak
2480	83.02	-	-	79.56	32.27	5.38	34.19	100	308	Average
2483.5	61.21	-12.79	74	57.75	32.27	5.38	34.19	100	308	Peak
2483.5	50.4	-3.6	54	46.94	32.27	5.38	34.19	100	308	Average
7440	57.03	-16.97	74	46.42	35.9	9.68	34.97	100	0	Peak
7440	48.26	-5.74	54	37.66	35.9	9.68	34.98	100	0	Average

3.9 Antenna Requirements

3.9.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.9.2 Antenna Connected Construction

The antennas type used in this product is PIFA Antenna without connector and it is considered to meet antenna requirement.

3.9.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 23, 2009	Jun. 22, 2010	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	0932001	N/A	Sep. 17, 2009	Sep. 16, 2010	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	0846202	N/A	Sep. 10, 2009	Sep. 09, 2010	Conducted (TH02-HY)
EMI Test Receive	R&S	ESCS 30	100356	9KHz ~ 2.75GHz	Aug. 05, 2009	Aug. 04, 2010	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9kHz~30MHz	Nov. 30, 2009	Nov. 29, 2010	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9kHz~30MHz	Nov. 23, 2009	Nov. 22, 2010	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Oct. 31, 2009	Oct. 30, 2010	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP	101067	9KHz ~ 30GHz	Dec. 04, 2009	Dec. 03, 2010	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 20, 2009	Aug. 19, 2010	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz- 40GHz	Oct. 14, 2009	Oct. 13, 2010	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Dec.09,2009	Dec. 08, 2010	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32 dB.GAIN	Mar. 27, 2010	Mar. 26, 2011	Radiation (03CH07-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
Combined Standard Uncertainty $U_c(y)$	1.13		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.26		

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	± 0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	± 1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	± 0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	± 2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	± 1.50	Rectangular	0.87	1	0.87
Site Imperfection	± 2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				



Appendix A. Photographs of EUT

Please refer to Sporton report number EP060209-01 as below.