

FCC RF Test Report

APPLICANT : Acer Incorporated
EQUIPMENT : Smart HandHeld
BRAND NAME : Acer
MODEL NAME : E320
FCC ID : HLZDME320
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : Digital Spread Spectrum (DSS)

The product was received on Jul. 28, 2011 and completely tested on Aug. 12, 2011. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : HLZDME320

Page Number : 1 of 58

Report Issued Date : Aug. 24, 2011

Report Version : Rev. 01



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test	5
1.4 Testing Site	6
1.5 Applied Standards	6
1.6 Ancillary Equipment List	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 RF Output Power	8
2.2 Test Mode	9
2.3 Connection Diagram of Test System	10
2.4 RF Utility	10
3 TEST RESULT	11
3.1 Number of Channel Measurement	11
3.2 20dB and 99% Bandwidth Measurement	13
3.3 Hopping Channel Separation Measurement	26
3.4 Dwell Time Measurement	29
3.5 Peak Output Power Measurement	31
3.6 Band Edges Measurement	34
3.7 Spurious Emission Measurement	38
3.8 AC Conducted Emission Measurement	42
3.9 Radiated Emission Measurement	46
3.10 Antenna Requirements	55
4 LIST OF MEASURING EQUIPMENT	56
5 UNCERTAINTY OF EVALUATION	57
APPENDIX A. PHOTOGRAPHS OF EUT	
APPENDIX B. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR172802-02A	Rev. 01	Initial issue of report	Aug. 24, 2011

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	A8.4(2)	Number of Channels	$\geq 15\text{Chs}$	Pass	-
3.2	15.247(a)(1)	A8.1(a)	20dB Bandwidth	NA	Pass	-
3.2	-	Gen 4.4.1	99% Bandwidth	-	Pass	-
3.3	15.247(a)(1)	A8.1(b)	Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.4	15.247(a)(1)	A8.1(d)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.5	15.247(b)(1)	A8.1(b)	Peak Output Power	$\leq 125\text{ mW}$	Pass	-
3.6	15.247(d)	A8.5	Frequency Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	A8.5	Spurious Emission	$< 20\text{ dBc}$	Pass	-
3.8	15.207	Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 17.1 dB at 0.28 MHz
3.9	15.247(d)	A8.5	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.69 dB at 2483.5 MHz
3.10	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

Acer Incorporated

8F., No. 88, Sec. 1, Xintai 5th. Rd., Xizhi Dist., New Taipei City 22181, Taiwan (R.O.C)

1.2 Manufacturer

COMPAL COMMUNICATIONS(NANJING) CO., LTD.

No. 68-2, Suyuan Road, Nanjing Export Processing Zone (South Area), P.R China

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Smart HandHeld
Brand Name	Acer
Model Name	E320
FCC ID	HLZDME320
Tx/Rx Frequency Range	2400 MHz ~ 2483.5 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Channel Spacing	1 MHz
Maximum Output Power to Antenna	Bluetooth (1Mbps) : 1.67 dBm (0.0015 W) Bluetooth EDR (2Mbps) : 4.49 dBm (0.0028 W) Bluetooth EDR (3Mbps) : 2.24 dBm (0.0017 W)
Antenna Type	PIFA Antenna with gain 1.4 dBi
Type of Modulation	Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
EUT Stage	Identical Prototype

Remark:

1. For other wireless features of this EUT, test report will be issued separately.
2. This test report recorded only product characteristics and test results of Digital Spread Spectrum (DSS).
3. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	CO05-HY	03CH06-HY	722060/4086B-1

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC Public Notice DA 00-705
- ANSI C63.4-2003
- IC RSS-210 Issue 8

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.

1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	T&E	GS-50	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	Vostro 1510	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
6.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A

2 Test Configuration of Equipment Under Test

2.1 RF Output Power

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	0.80 dBm	3.53 dBm	1.24 dBm
Ch39	2441MHz	1.44 dBm	4.19 dBm	1.86 dBm
Ch78	2480MHz	1.67 dBm	4.49 dBm	2.24 dBm

Remark:

1. The data rate was set in 2Mbps for all the test items due to the highest RF output power.
2. The EUT is programmed to transmit signals continuously for all testing.

2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Pre-scanned tests, X, Y, Z in three orthogonal panels, were conducted to determine the final configuration from all possible combinations.

The following tables are showing the test modes as the worst cases and recorded in this report.


Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted TCs	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated TCs	N/A	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	N/A
AC Conducted Emission	Mode 1 :GSM850 Idle + Bluetooth Link + WLAN Link (2.4G) + GPS Rx + Earphone + Battery + USB Cable (Charging from Adapter)		
Remark: For radiated TCs, the data rate was set in 2Mbps due to the highest RF output power; only the data of these modes was reported.			

2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

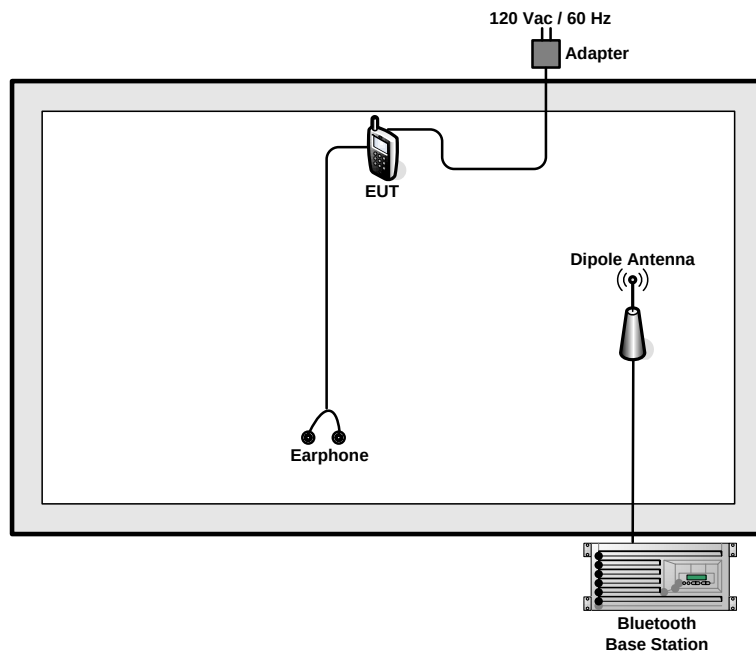

<AC Conducted Emission Mode>

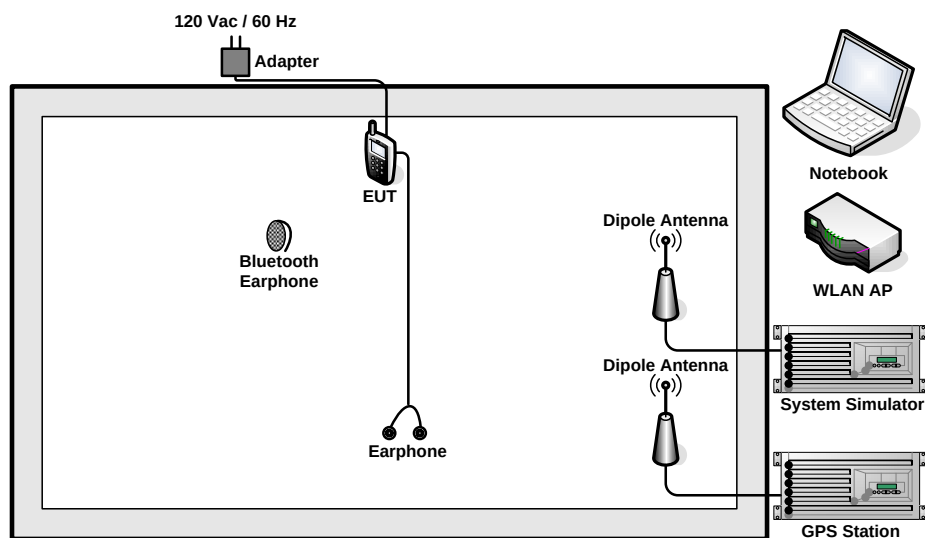

2.4 RF Utility

For Bluetooth function, enter into DUT Mode and press Bluetooth to make the EUT contact with Bluetooth base station for transmitting and receiving signals continuously.

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The modulation types of EUT are irrelevant to number of hopping channels deviation.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = the frequency band of operation; RBW $\geq$ 1% of the span; VBW $\geq$ RBW; Sweep = auto;
Detector function = peak; Trace = max hold.
5. The number of hopping frequency used is defined as the device has the numbers of total channel.


3.1.4 Test Setup

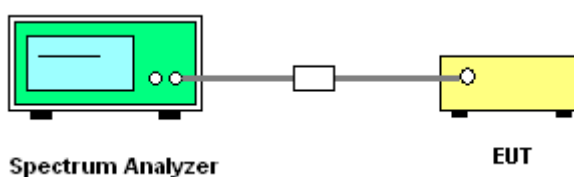


3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	Mode 4~6	Temperature :	23~25°C
Test Engineer :	Hank Yu	Relative Humidity :	50~53%
Number of Hopping Channels (Channel)		Limits (Channel)	Pass/Fail
79		> 15	Pass

Number of Hopping Channel Plot on Channel 00 - 78

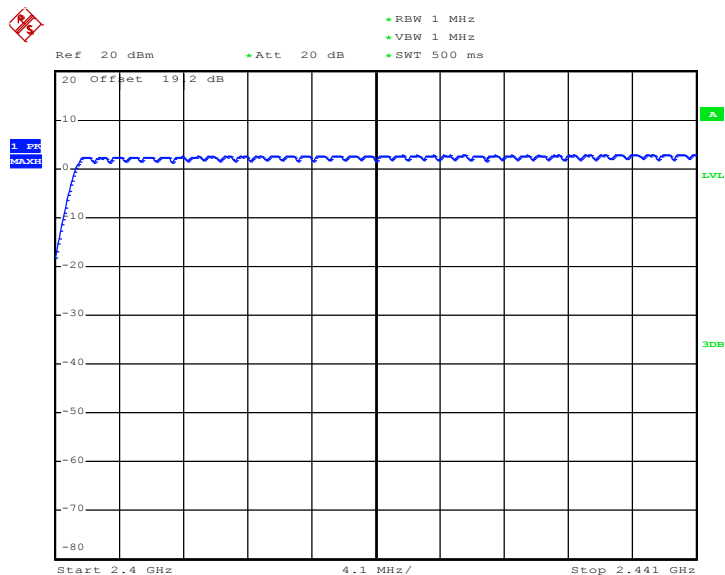

Date: 12.AUG.2011 20:33:04

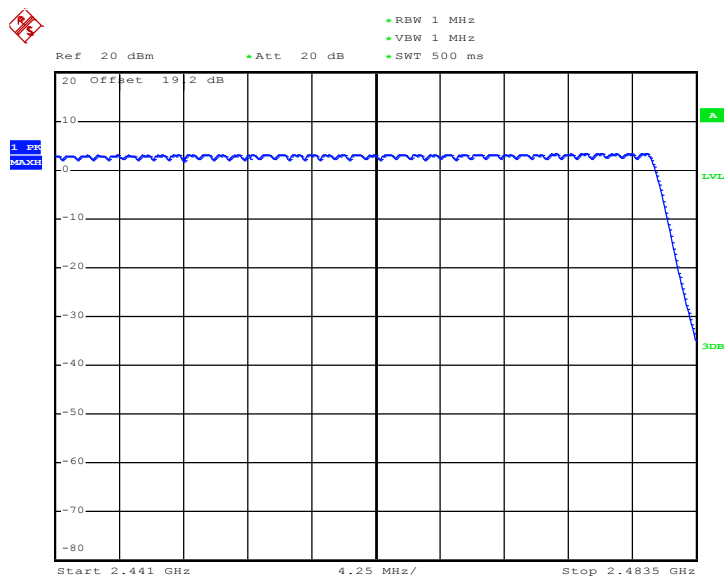

Date: 12.AUG.2011 20:37:50

3.2 20dB and 99% Bandwidth Measurement

3.2.1 Limit of 20dB Bandwidth

N/A


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

3.2.4 Test Setup

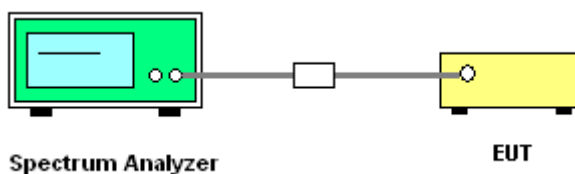


3.2.5 Test Result of 20dB Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	23~25℃
Test Engineer :	Hank Yu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.000
39	2441	1.004
78	2480	1.008


20 dB Bandwidth Plot on Channel 00

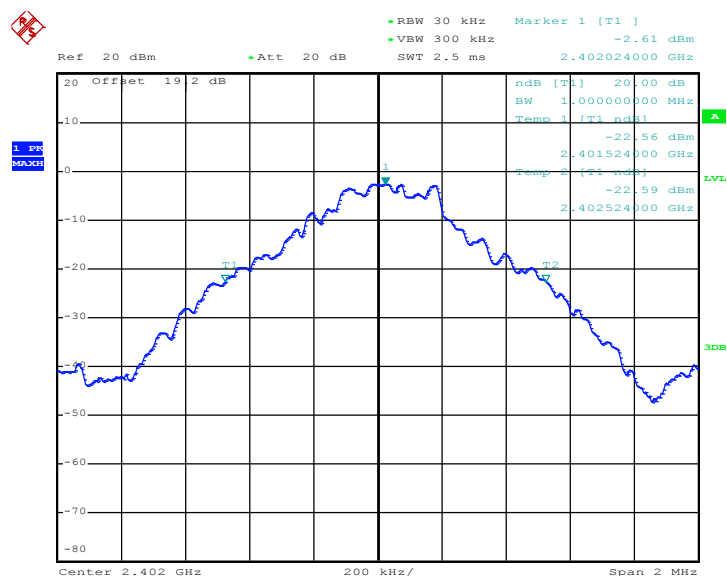

Date: 12.AUG.2011 20:00:39




20 dB Bandwidth Plot on Channel 39

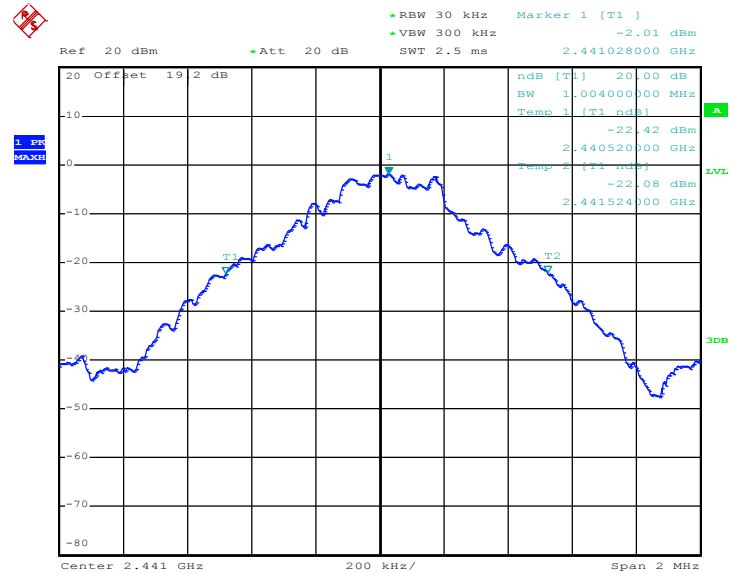

Date: 12.AUG.2011 20:01:04


20 dB Bandwidth Plot on Channel 78

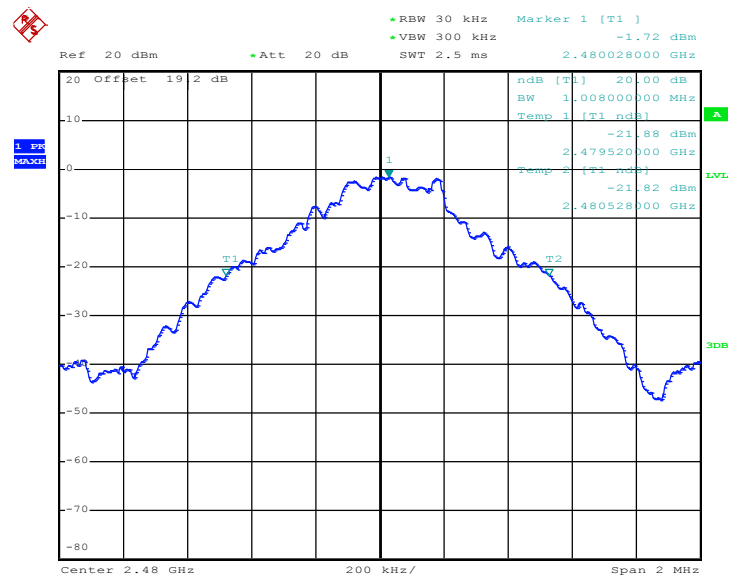


Date: 12.AUG.2011 20:01:24

Test Mode :	Mode 4, 5, 6	Temperature :	23~25°C
Test Engineer :	Hank Yu	Relative Humidity :	50~53%


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.332
39	2441	1.326
78	2480	1.332

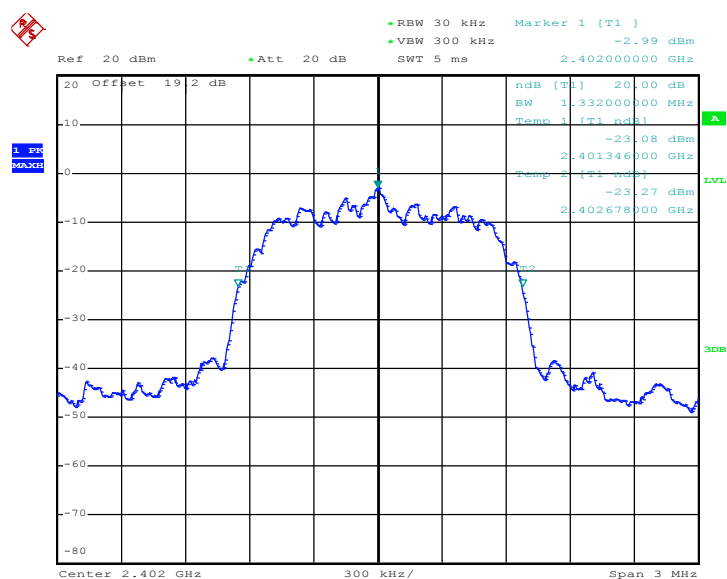20 dB Bandwidth Plot on Channel 00


Date: 12.AUG.2011 20:01:53

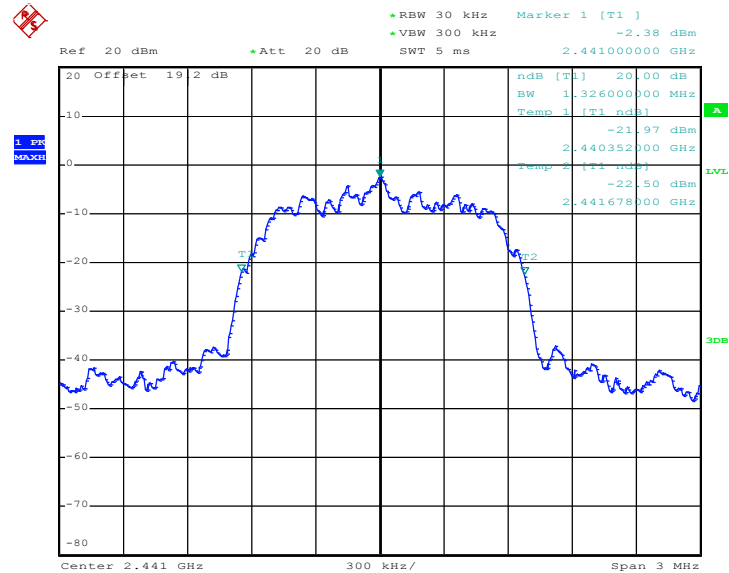20 dB Bandwidth Plot on Channel 39


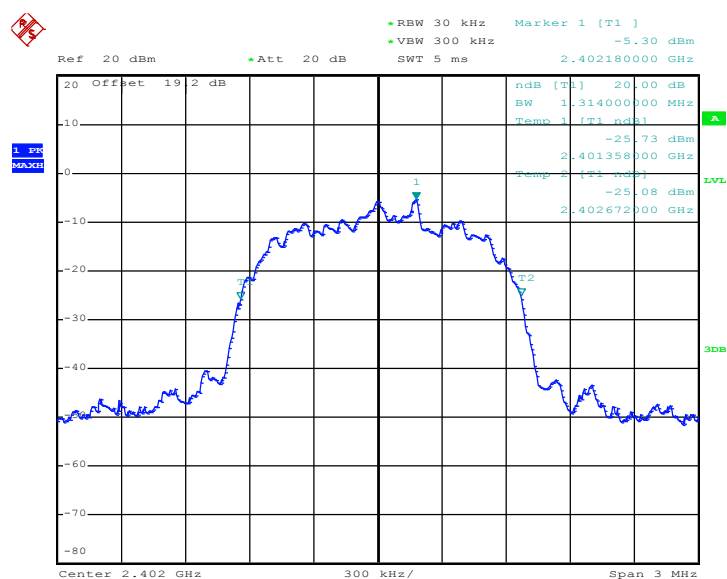
Date: 12.AUG.2011 20:02:10

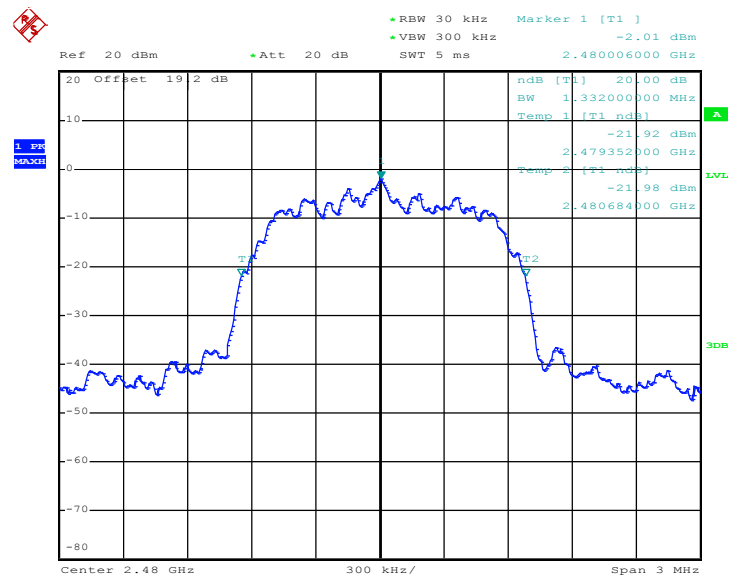20 dB Bandwidth Plot on Channel 78


Date: 12.AUG.2011 20:02:31

Test Mode :	Mode 7, 8, 9	Temperature :	23~25°C
Test Engineer :	Hank Yu	Relative Humidity :	50~53%


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.314
39	2441	1.308
78	2480	1.314

20 dB Bandwidth Plot on Channel 00


Date: 12.AUG.2011 20:03:00




20 dB Bandwidth Plot on Channel 39

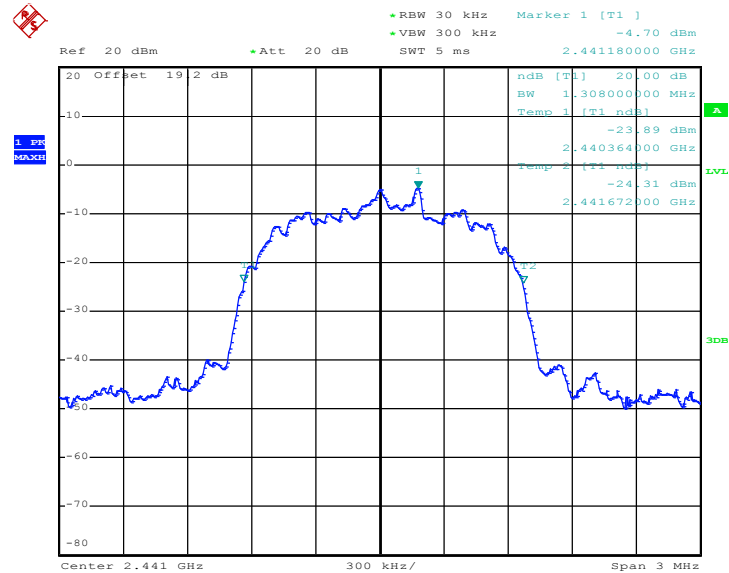

Date: 12.AUG.2011 20:03:40

20 dB Bandwidth Plot on Channel 78

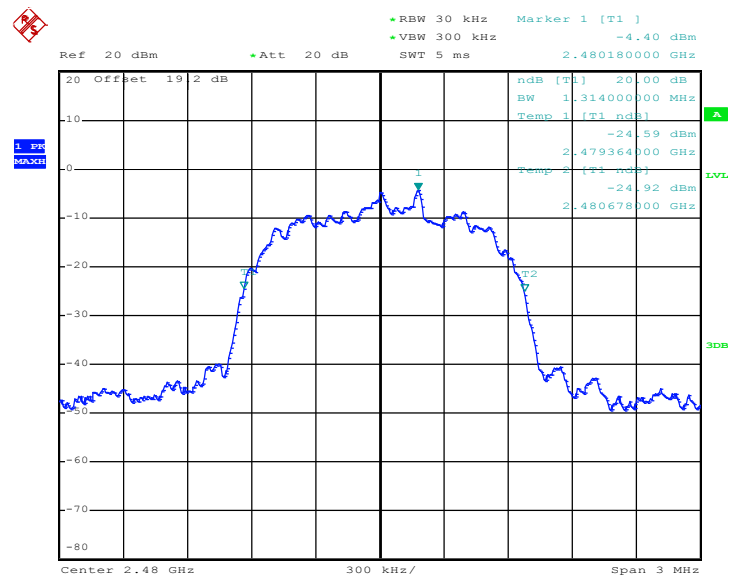


Date: 12.AUG.2011 20:04:00

3.2.6 Test Result of 99% Occupied Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	23~25℃
Test Engineer :	Hank Yu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	0.900
39	2441	0.904
78	2480	0.904


99% Bandwidth Plot on Channel 00

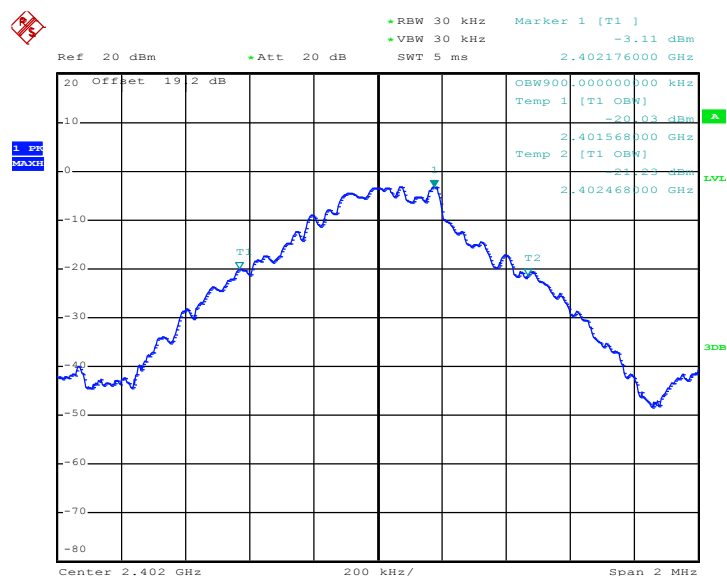

Date: 12.AUG.2011 18:27:58




99% Occupied Bandwidth Plot on Channel 39

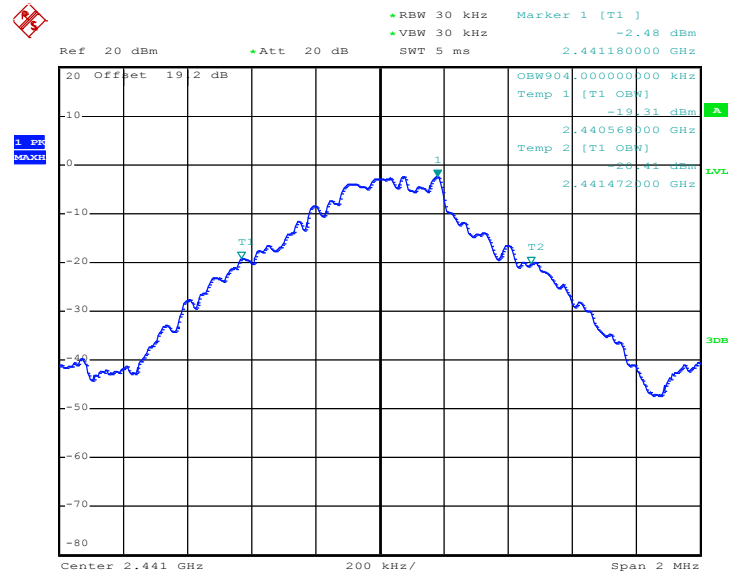

Date: 12.AUG.2011 18:29:12


99% Occupied Bandwidth Plot on Channel 78

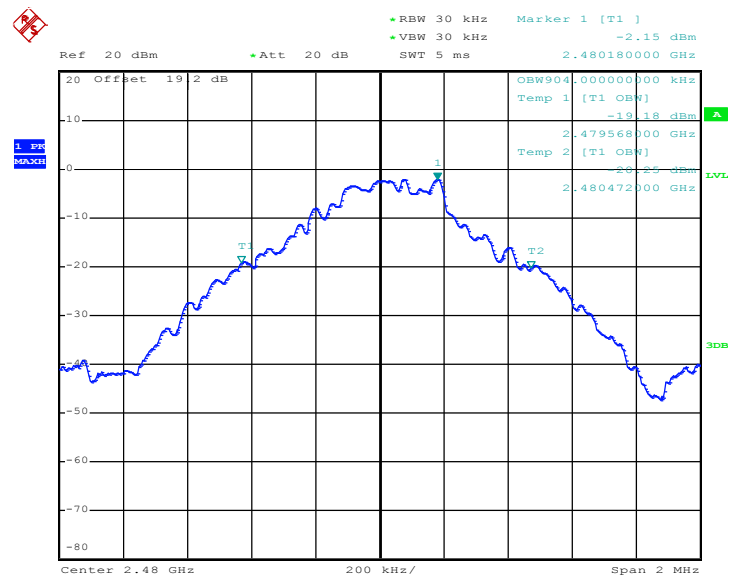

Date: 12.AUG.2011 18:31:37

Test Mode :	Mode 4, 5, 6	Temperature :	23~25°C
Test Engineer :	Hank Yu	Relative Humidity :	50~53%


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.192
39	2441	1.188
78	2480	1.192

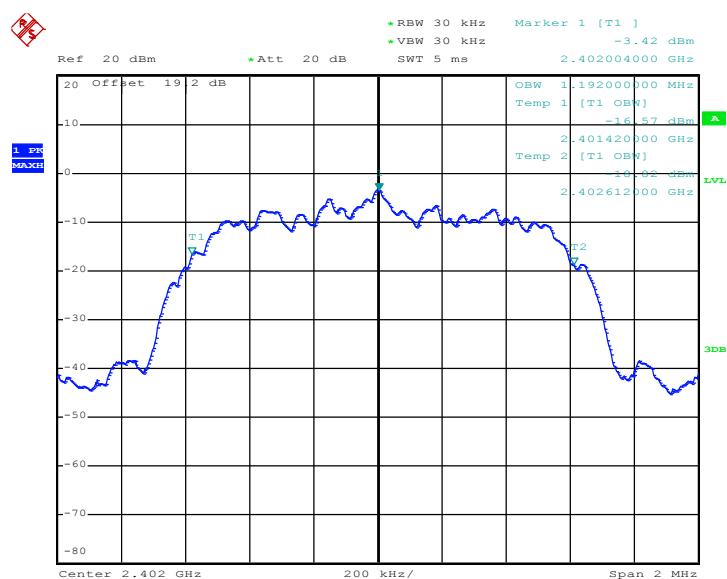99% Bandwidth Plot on Channel 00


Date: 12.AUG.2011 18:33:08




99% Occupied Bandwidth Plot on Channel 39

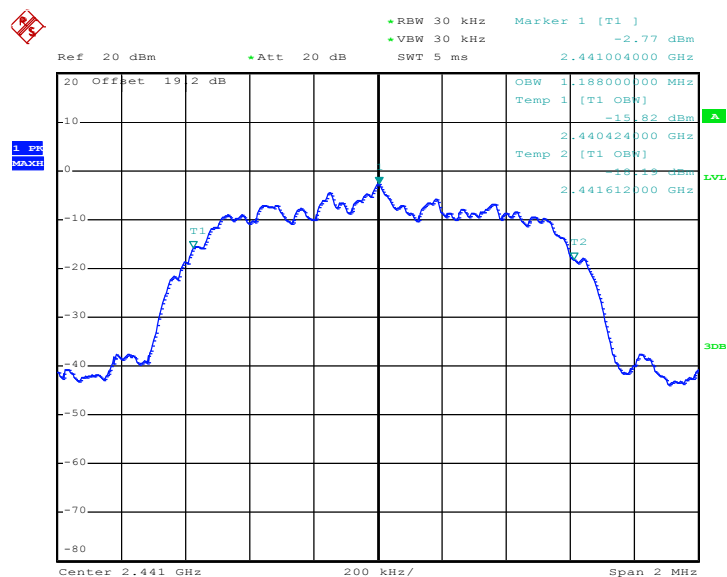

Date: 12.AUG.2011 18:34:41


99% Occupied Bandwidth Plot on Channel 78

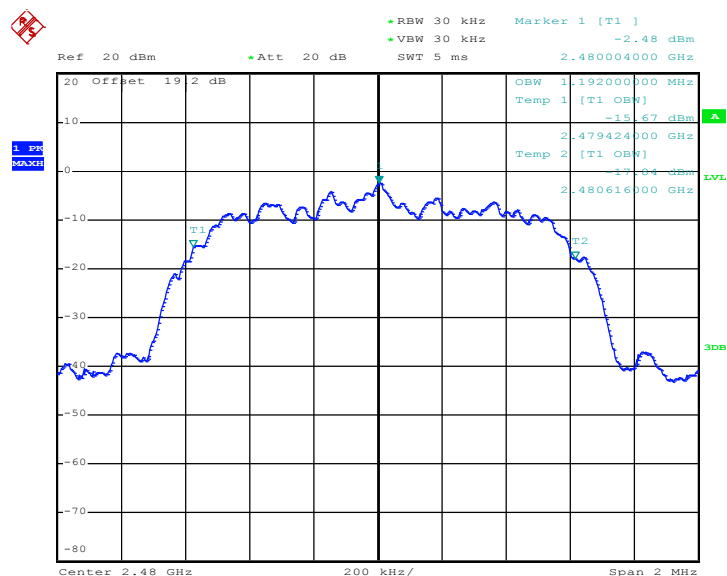

Date: 12.AUG.2011 18:35:38

Test Mode :	Mode 7, 8, 9	Temperature :	23~25°C
Test Engineer :	Hank Yu	Relative Humidity :	50~53%


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.180
39	2441	1.184
78	2480	1.180

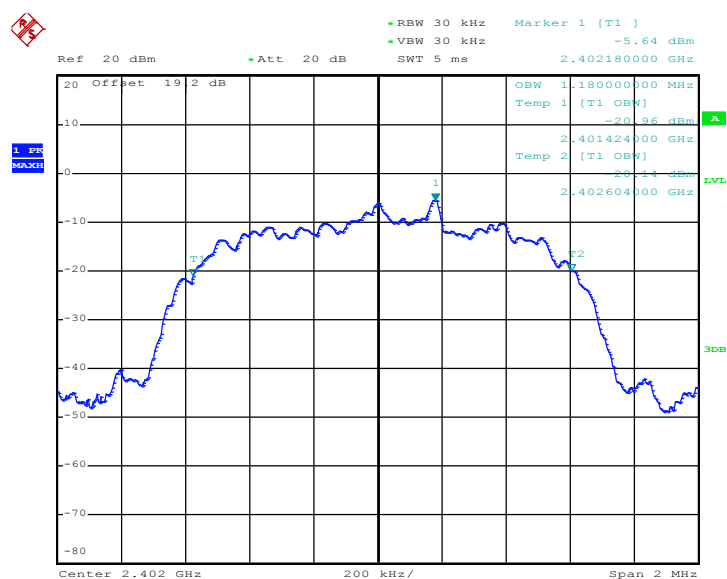99% Bandwidth Plot on Channel 00


Date: 12.AUG.2011 18:36:45




99% Occupied Bandwidth Plot on Channel 39

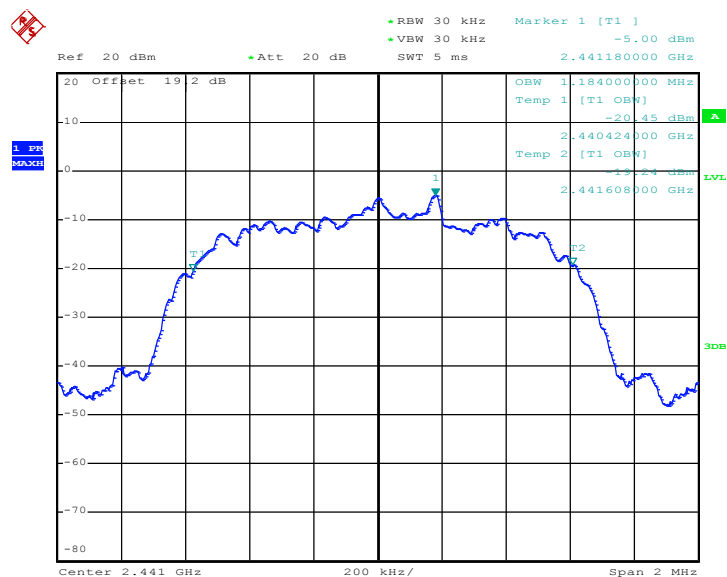

Date: 12.AUG.2011 18:37:48

99% Occupied Bandwidth Plot on Channel 78

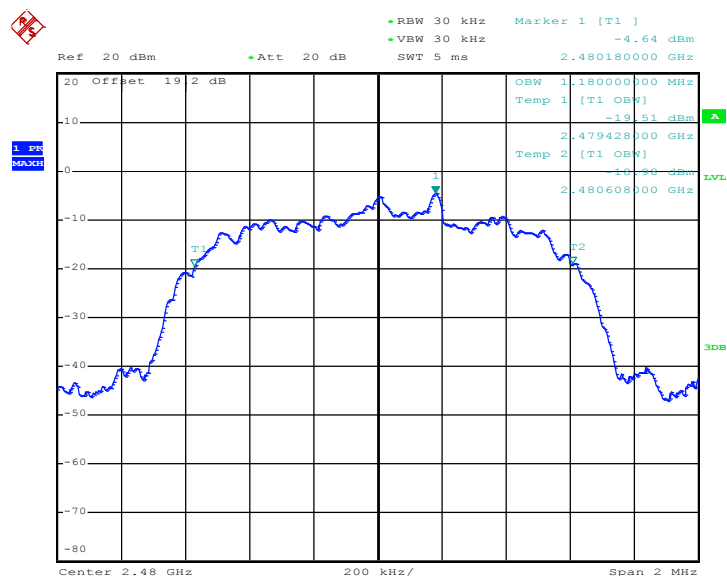

Date: 12.AUG.2011 18:38:41

3.3 Hopping Channel Separation Measurement

3.3.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. Please refer FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; $RBW \geq 1\%$ of the span;
 $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

3.3.4 Test Setup

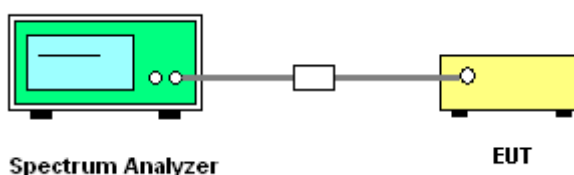


3.3.5 Test Result of Hopping Channel Separation


Test Mode :	Mode 4, 5, 6	Temperature :	23~25℃
Test Engineer :	Hank Yu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8880	Pass
39	2441	1.002	0.8840	Pass
78	2480	1.002	0.8880	Pass


Channel Separation Plot on Channel 00 - 01

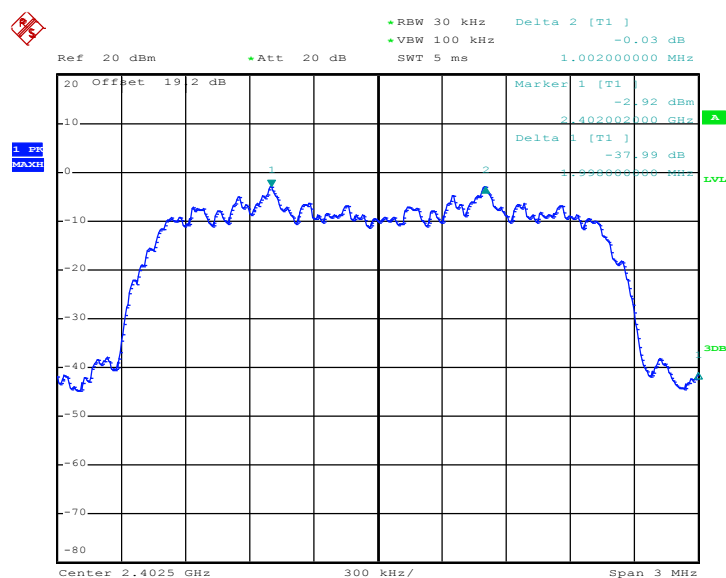

Date: 12.AUG.2011 19:49:22

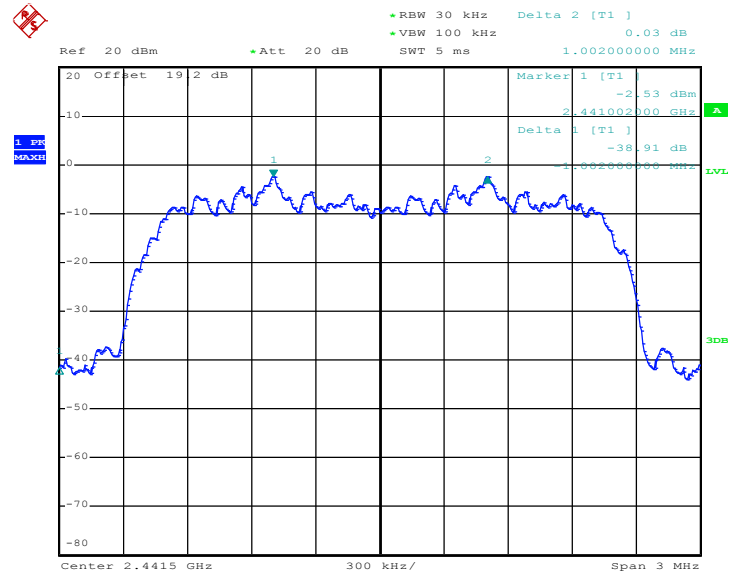Channel Separation Plot on Channel 39 - 40


Date: 12.AUG.2011 19:50:01

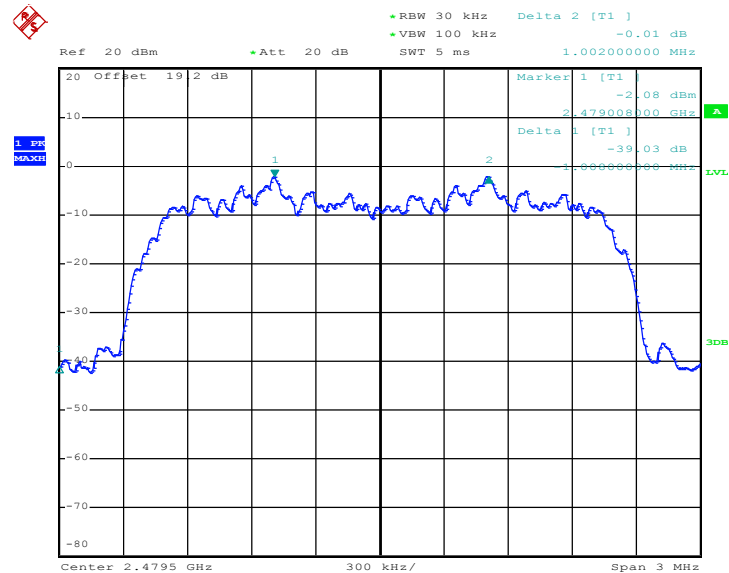Channel Separation Plot on Channel 77 - 78


Date: 12.AUG.2011 19:51:41

3.4 Dwell Time Measurement

3.4.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to calculate the dwell time.

3.4.4 Test Setup

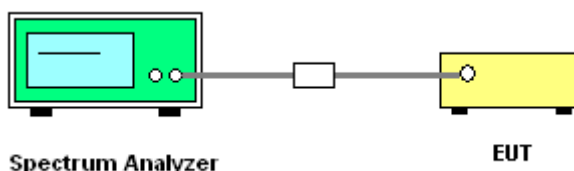

3.4.5 Test Result of Dwell Time

Test Mode :	Mode 5	Temperature :	23~25°C
Test Engineer :	Hank Yu	Relative Humidity :	50~53%

Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
2DH5	2.60	3052.00	0.25	0.4	Pass

Remark:

1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79 channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. t: Package Transfer Time(us)



RBW 1 MHz Delta 3 [T1]
 0.74 dB
 VBW 1 MHz
 SWT 10 ms 3.752000 ms

Ref 20 dBm Att 20 dB

20 Offset 19.2 dB
 -10
 -20
 -30
 -40
 -50
 -60
 -70
 -80

Marker 1 [T1]
 -50.12 dBm
 2.902000 ms
 Delta 2 [T1]
 1.81 dB
 3.622000 ms

1.56 MHz
 PULSE

Center 2.441 GHz 1 ms/

Date: 12.AUG.2011 19:13:46

RBW 1 MHz
VBW 1 MHz
SWT 10 s

Ref 20 dBm
Att 20 dB

20 Offset 19.2 dB

1. Vg
PASH

0
-10
-20
-30
-40
-50
-60
-70
-80

Center 2.441 GHz

1 s/

Date: 12.AUG.2011 19:20:04

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW (20.97dBm).


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.


3.5.4 Test Setup

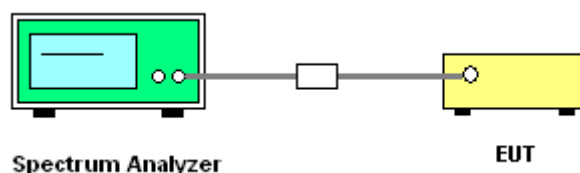


3.5.5 Test Result of Peak Output Power

Test Mode :	Mode 4, 5, 6	Temperature :	23~25°C
Test Engineer :	Hank Yu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	3.53	20.97	Pass
39	2441	4.19	20.97	Pass
78	2480	4.49	20.97	Pass

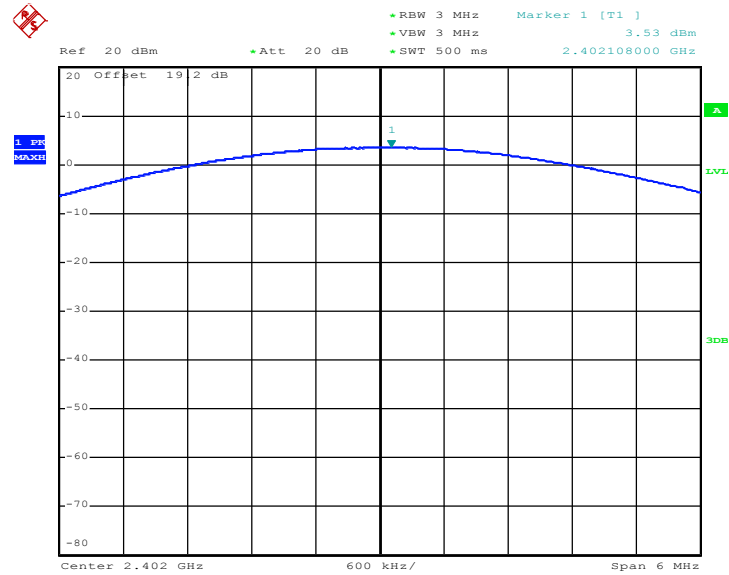Peak Output Power Plot on Channel 00


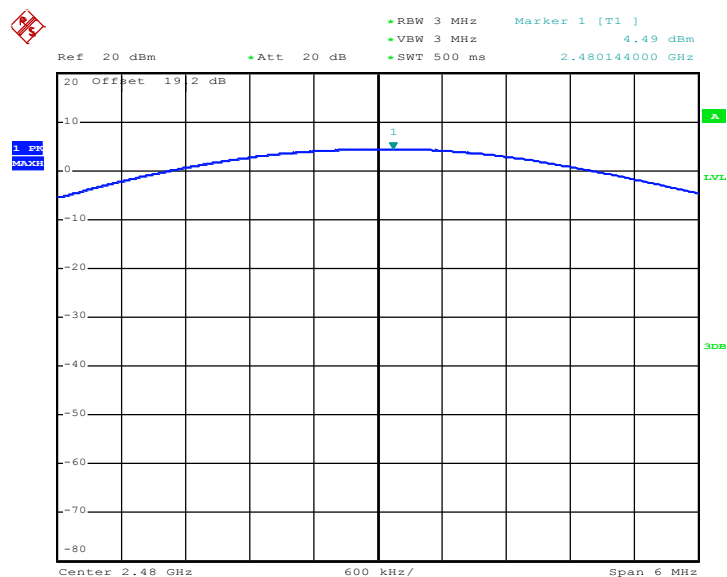
Date: 12.AUG.2011 01:22:14

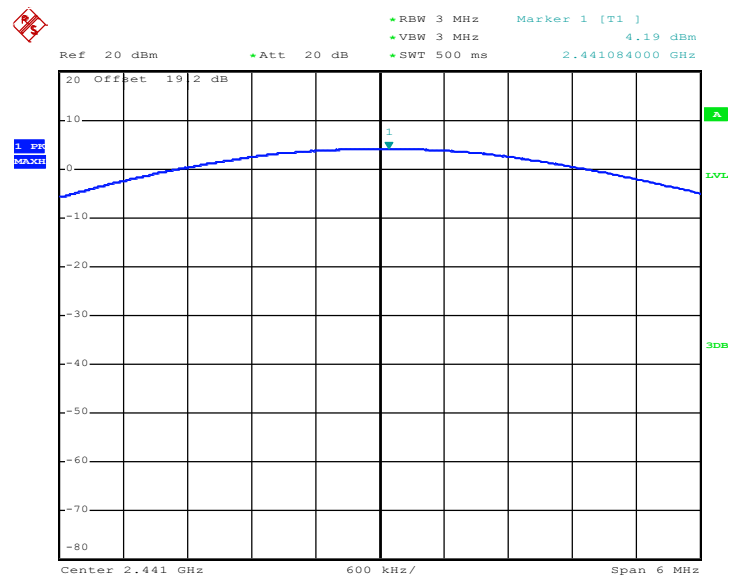Peak Output Power Plot on Channel 39


Date: 12.AUG.2011 01:23:30



Peak Output Power Plot on Channel 78



Date: 12.AUG.2011 01:24:45

3.6 Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

3.6.2 Measuring Instruments


See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC Public Notice DA 00-705 Measurement Guidelines.
2. RF antenna conducted test: Set RBW = 300kHz, Video bandwidth (VBW) $\geq$ RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300k Hz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Applies to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 1MHz, Sweep: Auto for Peak; set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto for Average. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation. See FCC Section 15.35(b) and (c).
4. In case the emission is fail due to the used RBW / VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.

3.6.4 Test Setup

<Radiated Band Edges>

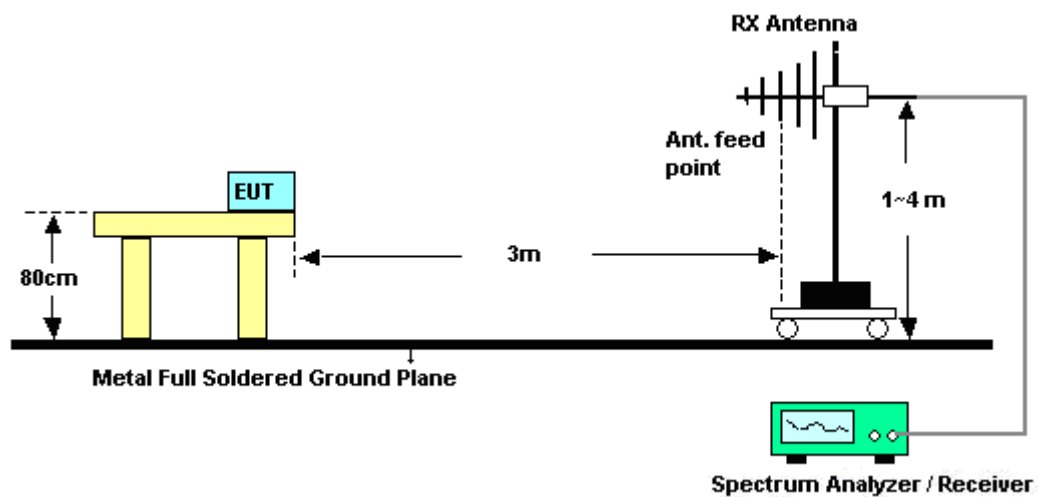

<Conducted Band Edges>

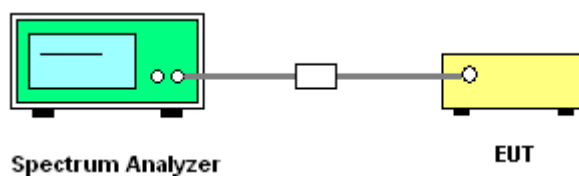

3.6.5 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	22~25°C
Test Channel :	00	Relative Humidity :	51~54%
		Test Engineer :	Wii Chang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.99	46.58	-27.42	74	43.67	31.9	5.4	34.39	100	208	Peak
2389.99	33.59	-20.41	54	30.68	31.9	5.4	34.39	100	208	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.09	46.46	-27.54	74	43.55	31.9	5.4	34.39	107	27	Peak
2388.09	33.38	-20.62	54	30.47	31.9	5.4	34.39	107	27	Average

Test Mode :	Mode 3	Temperature :	22~25°C
Test Channel :	78	Relative Humidity :	51~54%
		Test Engineer :	Wii Chang


ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	63.56	-10.44	74	60.43	31.98	5.52	34.37	100	204	Peak
2483.5	50.31	-3.69	54	47.18	31.98	5.52	34.37	100	204	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	63.32	-10.68	74	60.19	31.98	5.52	34.37	100	4	Peak
2483.5	50.3	-3.7	54	47.17	31.98	5.52	34.37	100	4	Average

3.6.6 Test Result of Conducted Band Edges


Test Mode :	Mode 4 and 6	Temperature :	23~25℃
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Hank Yu

Low Band Edge Plot on Channel 00

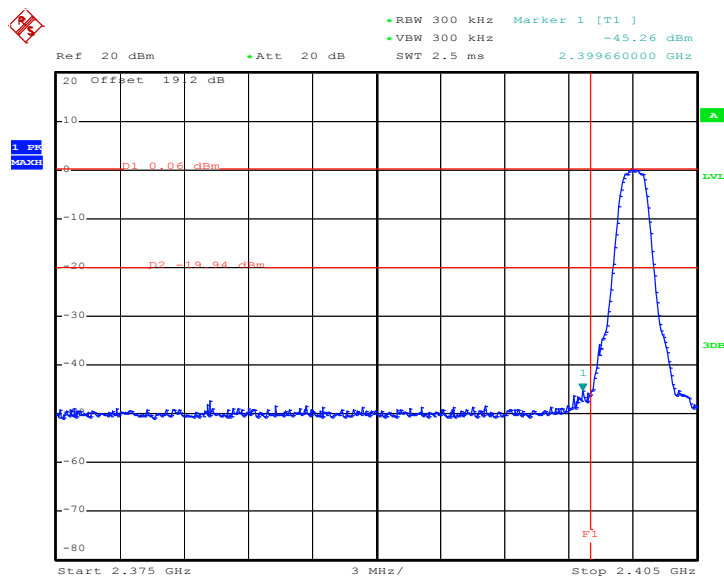

Date: 12.AUG.2011 20:06:48

High Band Edge Plot on Channel 78

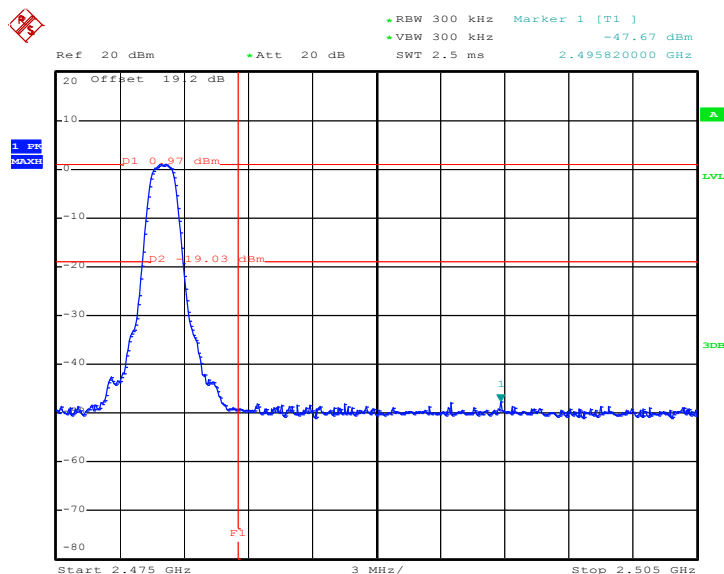

Date: 12.AUG.2011 20:07:51

3.7 Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

3.7.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 kHz, Video bandwidth (VBW) $\geq$ RBW, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.


3.7.4 Test Setup

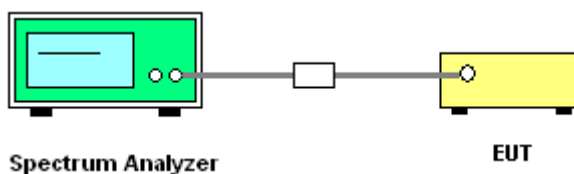

3.7.5 Test Result


Test Mode :	Mode 4	Temperature :	23~25°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Hank Yu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

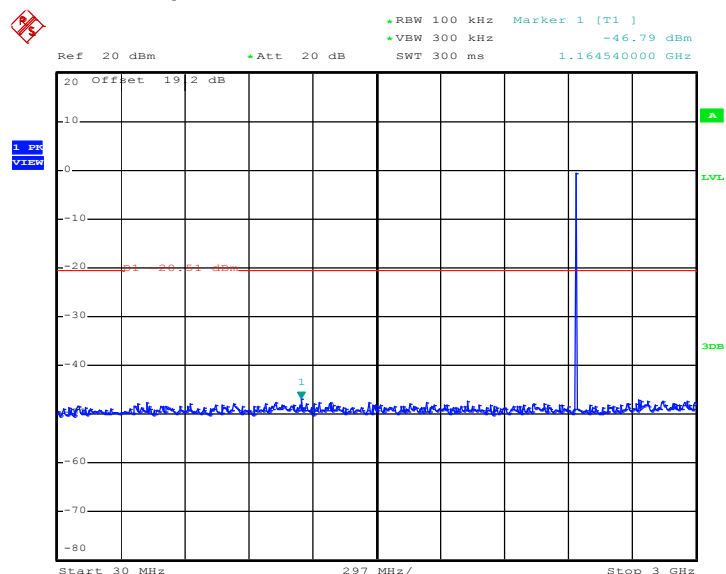

Date: 12.AUG.2011 20:12:26

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

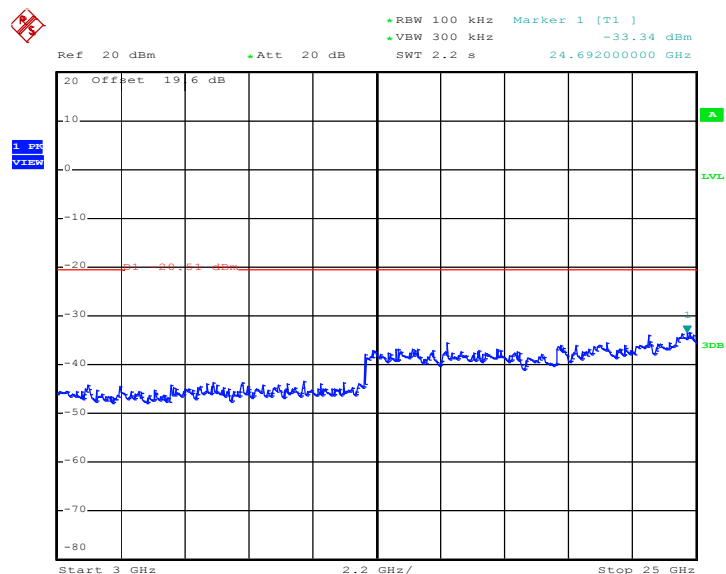


Date: 12.AUG.2011 20:12:49




Test Mode :	Mode 5	Temperature :	23~25°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Hank Yu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

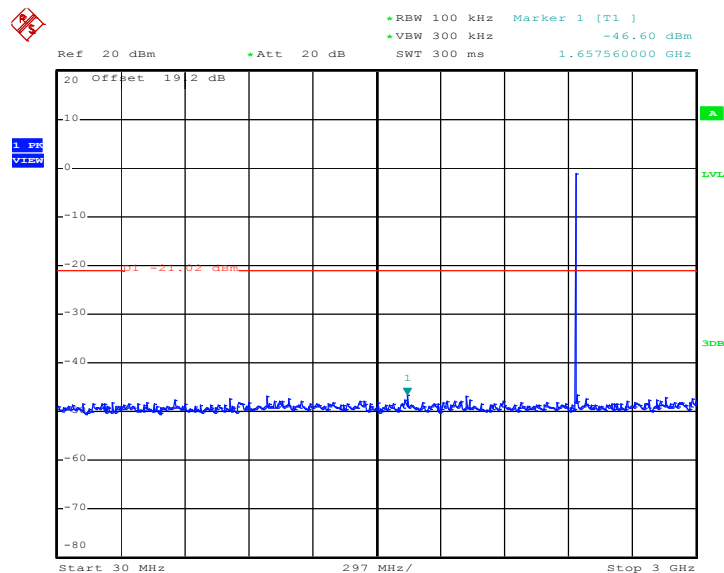

Date: 12.AUG.2011 20:13:23


Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

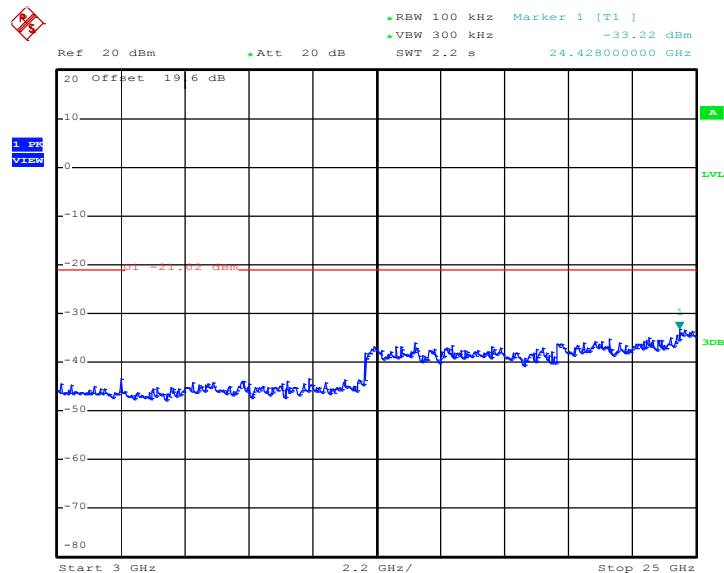


Date: 12.AUG.2011 20:13:46



Test Mode :	Mode 6	Temperature :	23~25°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Hank Yu

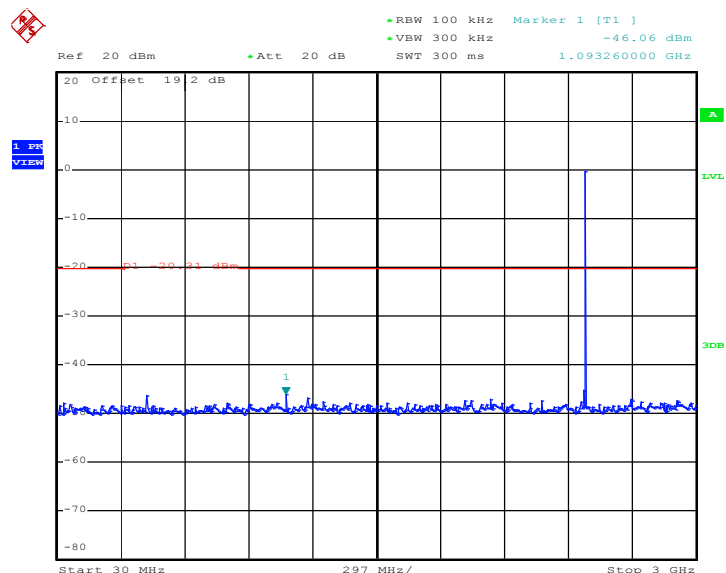Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

Date: 12.AUG.2011 20:14:25

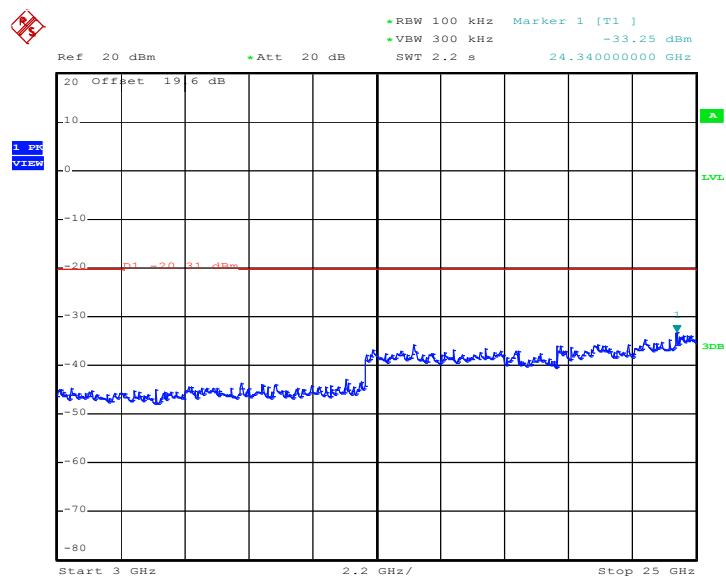Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

Date: 12.AUG.2011 20:14:48

3.8 AC Conducted Emission Measurement

3.8.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.8.2 Measuring Instruments

See list of measuring instruments of this test report.

3.8.3 Test Procedures


1. Please follow the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.8.4 Test Setup

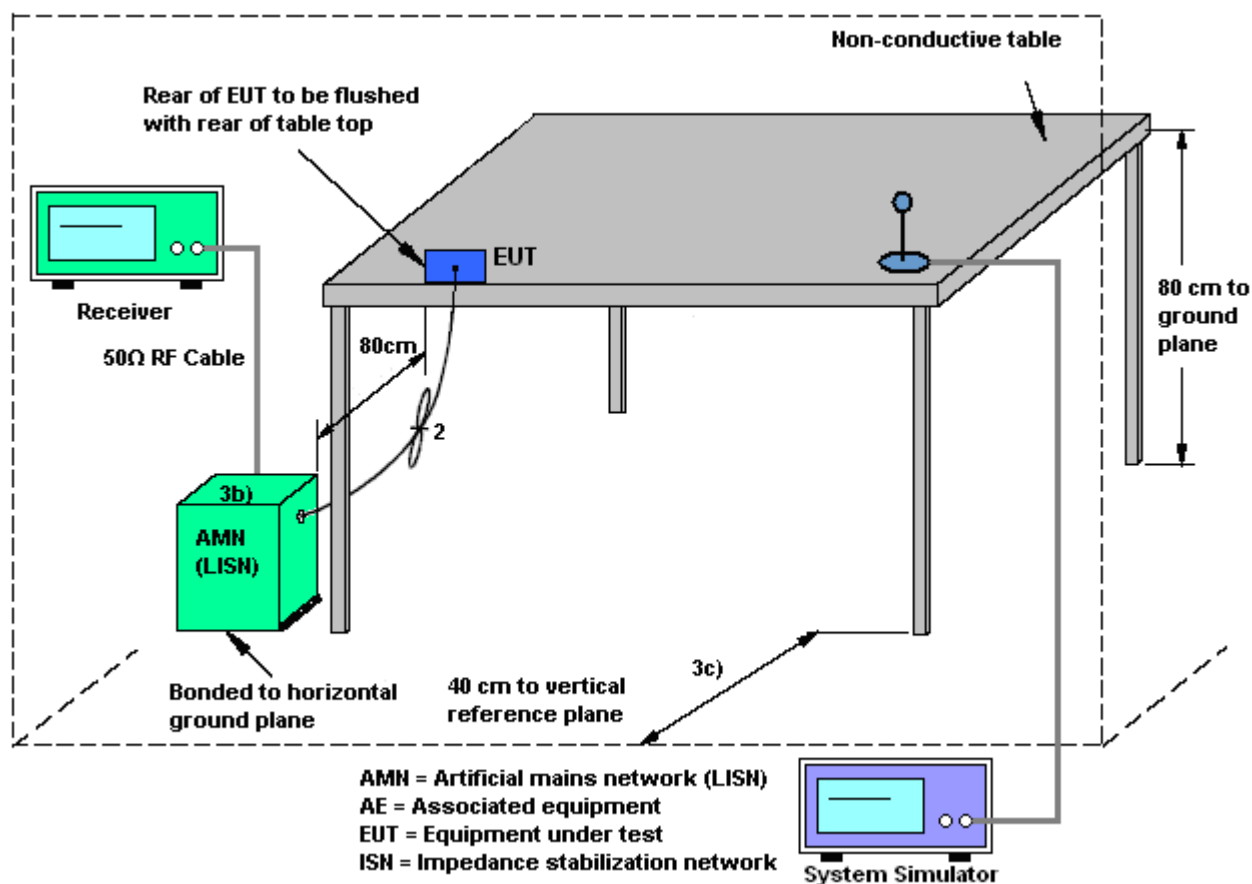

3.8.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Hayden Wu	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link (2.4G) + GPS Rx + Earphone + Battery + USB Cable (Charging from Adapter)		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

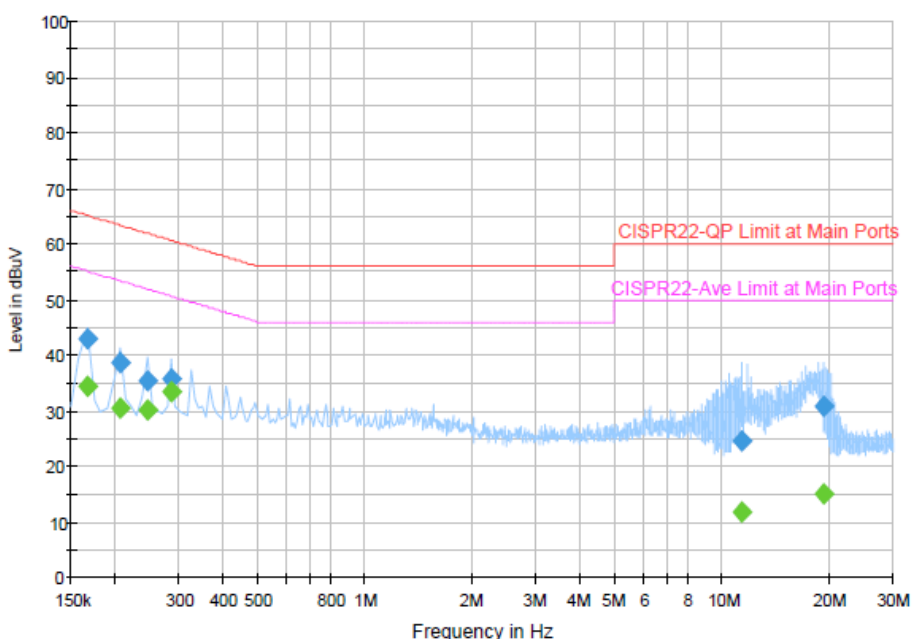


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.166000	43.1	Off	L1	19.4	22.1	65.2
0.206000	38.6	Off	L1	19.4	24.8	63.4
0.246000	35.5	Off	L1	19.4	26.4	61.9
0.286000	35.6	Off	L1	19.4	25.0	60.6
11.318000	24.6	Off	L1	19.6	35.4	60.0
19.294000	30.8	Off	L1	19.7	29.2	60.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.166000	34.5	Off	L1	19.4	20.7	55.2
0.206000	30.6	Off	L1	19.4	22.8	53.4
0.246000	30.2	Off	L1	19.4	21.7	51.9
0.286000	33.5	Off	L1	19.4	17.1	50.6
11.318000	12.0	Off	L1	19.6	38.0	50.0
19.294000	15.2	Off	L1	19.7	34.8	50.0

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Hayden Wu	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link (2.4G) + GPS Rx + Earphone + Battery + USB Cable (Charging from Adapter)		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

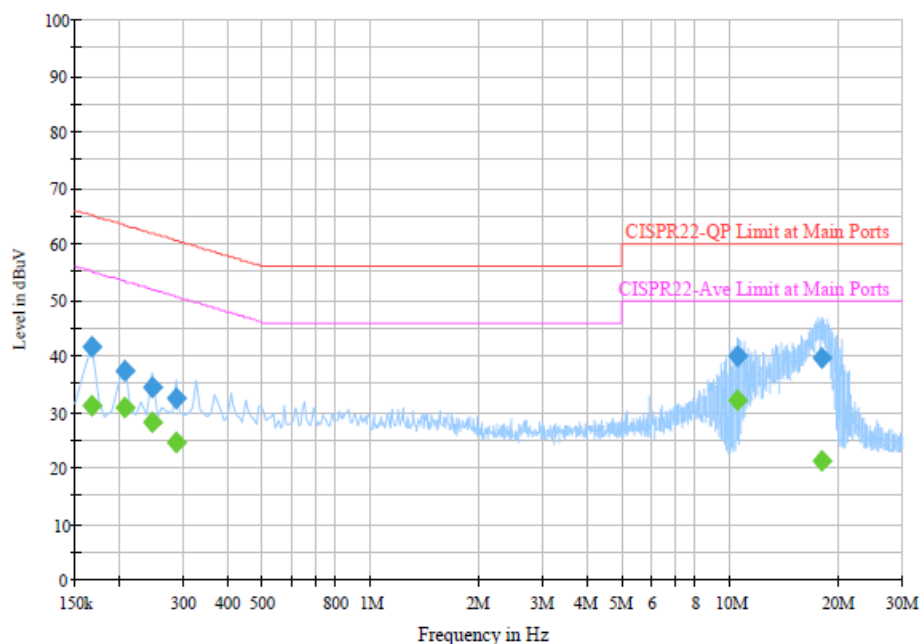
Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.166000	41.5	Off	N	19.4	23.7	65.2
0.206000	37.5	Off	N	19.4	25.9	63.4
0.246000	34.4	Off	N	19.4	27.5	61.9
0.286000	32.6	Off	N	19.4	28.0	60.6
10.446000	39.9	Off	N	19.6	20.1	60.0
17.950000	39.7	Off	N	19.7	20.3	60.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.166000	31.0	Off	N	19.4	24.2	55.2
0.206000	30.9	Off	N	19.4	22.5	53.4
0.246000	28.3	Off	N	19.4	23.6	51.9
0.286000	24.4	Off	N	19.4	26.2	50.6
10.446000	32.3	Off	N	19.6	17.7	50.0
17.950000	21.3	Off	N	19.7	28.7	50.0

3.9 Radiated Emission Measurement

3.9.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.9.2 Measuring Instruments


See list of measuring instruments of this test report.

3.9.3 Test Procedures


- The testing follows the guidelines in FCC Public Notice DA 00-705 Measurement Guidelines.
- Use the following spectrum analyzer settings:
 - Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
 - Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.
Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB)
- Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.
- Measured average value for the peak value is greater than 54 dBuV/m

3.9.4 Test Setup


For radiated emissions below 30MHz

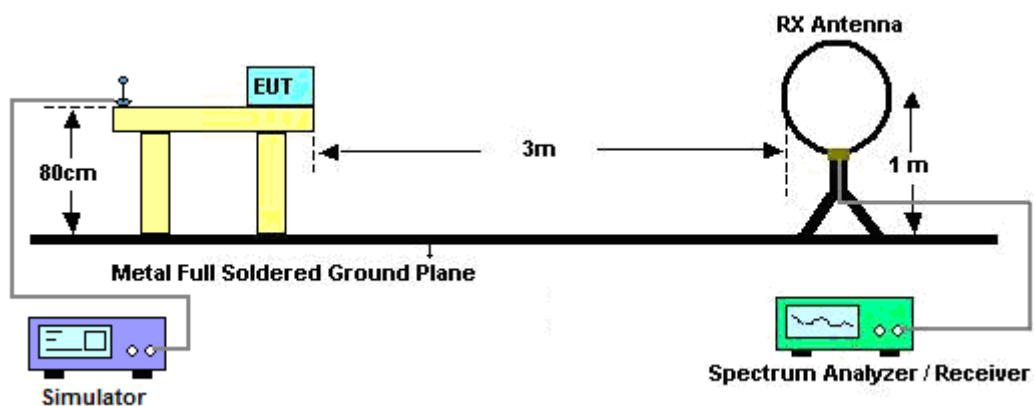

For radiated emissions from 30MHz to 1GHz

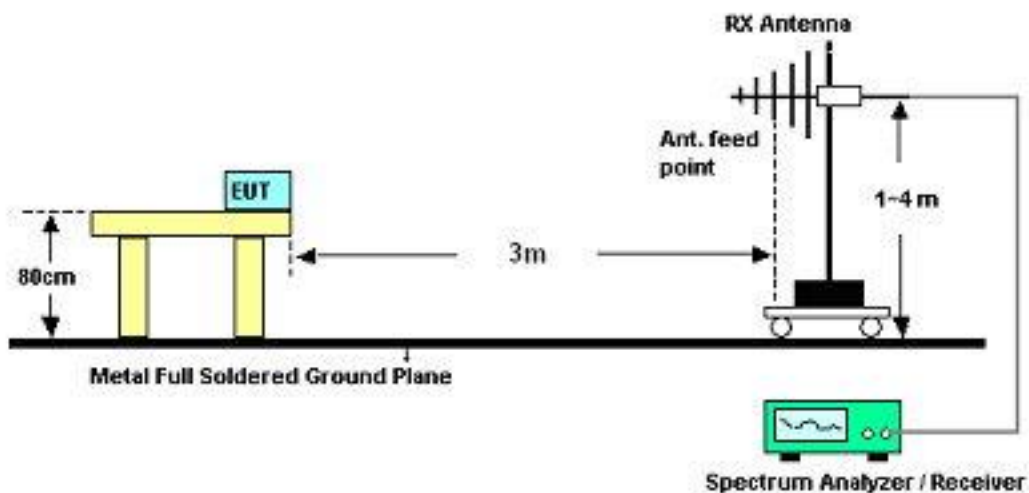

For radiated emissions above 1GHz

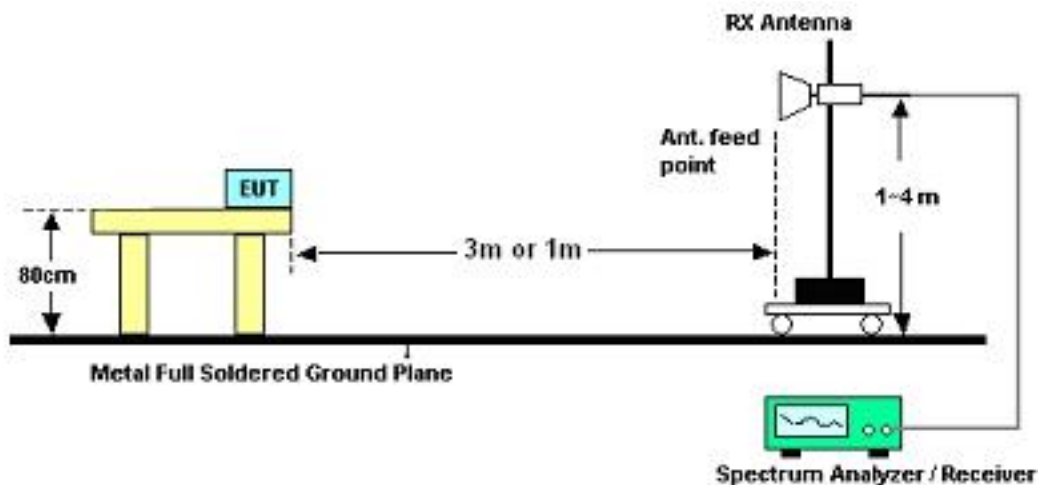

3.9.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

Test Engineer :	Wii Chang	Temperature :	22~25°C	
		Relative Humidity :	51~54%	

Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.9.6 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	Mode 1	Temperature :	22~25°C
Test Channel :	00	Relative Humidity :	51~54%
Test Engineer :	Wii Chang	Polarization :	Horizontal
Remark :	2402 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
107.49	28.18	-15.32	43.5	47.33	11.28	1.27	31.7	-	-	Peak
139.08	29.54	-13.96	43.5	48.36	11.44	1.44	31.7	100	11	Peak
257.34	24.72	-21.28	46	41.76	12.78	1.88	31.7	-	-	Peak
316.8	19.96	-26.04	46	35.6	13.86	2.12	31.62	-	-	Peak
549.9	21.33	-24.67	46	31.87	18.49	2.85	31.88	-	-	Peak
721.4	23.65	-22.35	46	32.72	19.68	3.3	32.05	-	-	Peak
2389.99	33.59	-20.41	54	30.68	31.9	5.4	34.39	100	208	Average
2389.99	46.58	-27.42	74	43.67	31.9	5.4	34.39	100	208	Peak
2402	98.24	-	-	95.33	31.9	5.4	34.39	100	208	Peak
2402	81.34	-	-	78.43	31.9	5.4	34.39	100	208	Average
2484	32.23	-21.77	54	29.1	31.98	5.52	34.37	100	208	Average
2484	44.75	-29.25	74	41.62	31.98	5.52	34.37	100	208	Peak



Test Mode :	Mode 1	Temperature :	22~25°C
Test Channel :	00	Relative Humidity :	51~54%
Test Engineer :	Wii Chang	Polarization :	Vertical
Remark :	2402 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
41.34	23.33	-16.67	40	42.44	11.78	0.81	31.7	100	22	Peak
101.28	25.55	-17.95	43.5	45.24	10.76	1.23	31.68	-	-	Peak
166.89	23.86	-19.64	43.5	44.14	9.84	1.54	31.66	-	-	Peak
357.4	17.63	-28.37	46	32.13	14.8	2.26	31.56	-	-	Peak
581.4	21.75	-24.25	46	31.99	18.91	2.89	32.04	-	-	Peak
756.4	23.36	-22.64	46	31.93	20.17	3.35	32.09	-	-	Peak
2388.09	33.38	-20.62	54	30.47	31.9	5.4	34.39	107	27	Average
2388.09	46.46	-27.54	74	43.55	31.9	5.4	34.39	107	27	Peak
2402	97.79	-	-	94.88	31.9	5.4	34.39	107	27	Peak
2402	80.91	-	-	78	31.9	5.4	34.39	107	27	Average
2492	32.23	-21.77	54	29.08	32	5.52	34.37	107	27	Average
2492	43.57	-30.43	74	40.42	32	5.52	34.37	107	27	Peak



Test Mode :	Mode 2	Temperature :	22~25°C
Test Channel :	39	Relative Humidity :	51~54%
Test Engineer :	Wii Chang	Polarization :	Horizontal
Remark :	2441 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
96.42	16.53	-26.97	43.5	36.97	10.05	1.18	31.67	-	-	Peak
150.69	25.86	-17.64	43.5	45.39	10.7	1.46	31.69	100	66	Peak
254.64	24.21	-21.79	46	41.27	12.75	1.87	31.68	-	-	Peak
314.7	19.72	-26.28	46	35.42	13.82	2.11	31.63	-	-	Peak
535.9	20.99	-25.01	46	31.73	18.31	2.8	31.85	-	-	Peak
742.4	22.63	-23.37	46	31.41	19.97	3.34	32.09	-	-	Peak
2316	44.67	-29.33	74	41.96	31.81	5.31	34.41	128	209	Peak
2316	32.58	-21.42	54	29.87	31.81	5.31	34.41	128	209	Average
2441	98.54	-	-	95.51	31.95	5.46	34.38	128	209	Peak
2441	81.92	-	-	78.89	31.95	5.46	34.38	128	209	Average
2500	44.46	-29.54	74	41.31	32	5.52	34.37	128	209	Peak
2500	32.36	-21.64	54	29.21	32	5.52	34.37	128	209	Average

Test Mode :	Mode 2	Temperature :	22~25°C
Test Channel :	39	Relative Humidity :	51~54%
Test Engineer :	Wii Chang	Polarization :	Vertical
Remark :	2441 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
42.69	23.86	-16.14	40	43.5	11.25	0.81	31.7	100	87	Peak
102.09	24.87	-18.63	43.5	44.49	10.84	1.23	31.69	-	-	Peak
198.48	24.49	-19.01	43.5	45.14	9.35	1.65	31.65	-	-	Peak
406.4	18.28	-27.72	46	31.76	15.9	2.42	31.8	-	-	Peak
565.3	21.25	-24.75	46	31.64	18.7	2.87	31.96	-	-	Peak
735.4	22.7	-23.3	46	31.58	19.87	3.33	32.08	-	-	Peak
2350	44.48	-29.52	74	41.71	31.84	5.34	34.41	102	13	Peak
2350	32.54	-21.46	54	29.77	31.84	5.34	34.41	102	13	Average
2441	98.9	-	-	95.87	31.95	5.46	34.38	102	13	Peak
2441	82.6	-	-	79.57	31.95	5.46	34.38	102	13	Average
2500	45.43	-28.57	74	42.28	32	5.52	34.37	102	13	Peak
2500	32.32	-21.68	54	29.17	32	5.52	34.37	102	13	Average



Test Mode :	Mode 3	Temperature :	22~25°C
Test Channel :	78	Relative Humidity :	51~54%
Test Engineer :	Wii Chang	Polarization :	Horizontal
Remark :	2480 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	16.67	-23.33	40	29.76	17.91	0.72	31.72	-	-	Peak
137.73	25.56	-17.94	43.5	44.36	11.47	1.43	31.7	100	31	Peak
252.48	25.94	-20.06	46	43.04	12.7	1.86	31.66	-	-	Peak
313.3	20.15	-25.85	46	35.9	13.77	2.11	31.63	-	-	Peak
572.3	21.4	-24.6	46	31.72	18.79	2.88	31.99	-	-	Peak
773.9	23.7	-22.3	46	31.98	20.41	3.35	32.04	-	-	Peak
2388	32.79	-21.21	54	29.88	31.9	5.4	34.39	100	204	Average
2388	45.75	-28.25	74	42.84	31.9	5.4	34.39	100	204	Peak
2480	82.2	-	-	79.07	31.98	5.52	34.37	100	204	Average
2480	99.05	-	-	95.92	31.98	5.52	34.37	100	204	Peak
2483.5	50.31	-3.69	54	47.18	31.98	5.52	34.37	100	204	Average
2483.5	63.56	-10.44	74	60.43	31.98	5.52	34.37	100	204	Peak



Test Mode :	Mode 3	Temperature :	22~25°C
Test Channel :	78	Relative Humidity :	51~54%
Test Engineer :	Wii Chang	Polarization :	Vertical
Remark :	2480 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
43.23	22.63	-17.37	40	42.81	10.71	0.81	31.7	100	66	Peak
101.28	24.76	-18.74	43.5	44.45	10.76	1.23	31.68	-	-	Peak
198.48	23.45	-20.05	43.5	44.1	9.35	1.65	31.65	-	-	Peak
332.9	17.47	-28.53	46	32.66	14.22	2.17	31.58	-	-	Peak
458.9	19.26	-26.74	46	31.61	16.97	2.53	31.85	-	-	Peak
645.8	23.23	-22.77	46	32.9	19.27	3.04	31.98	-	-	Peak
2358	32.67	-21.33	54	29.84	31.86	5.37	34.4	100	4	Average
2358	44.26	-29.74	74	41.43	31.86	5.37	34.4	100	4	Peak
2480	82.16	-	-	79.03	31.98	5.52	34.37	100	4	Average
2480	98.79	-	-	95.66	31.98	5.52	34.37	100	4	Peak
2483.5	50.3	-3.7	54	47.17	31.98	5.52	34.37	100	4	Average
2483.5	63.32	-10.68	74	60.19	31.98	5.52	34.37	100	4	Peak



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Connected Construction

The antennas type used in this product is PIFA Antenna without connector and it is considered to meet antenna requirement.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
System Simulator	R&S	CMU200	117995	N/A	Jul. 28, 2011	Jul. 27, 2012	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 13, 2011	Jun. 12, 2012	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	0932001	N/A	Sep. 13, 2010	Sep. 12, 2011	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	0846202	N/A	Sep. 14, 2010	Sep. 13, 2011	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D35P	TBN-930701	N/A	Jul. 27, 2011	Jul. 26, 2012	Conducted (TH02-HY)
EMI Test Receive	R&S	ESCI 7	100724	9kHz~7GHz	Aug. 19, 2010	Aug. 18, 2011	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9KHz – 30MHz	Dec. 03, 2010	Dec. 02, 2011	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9KHz – 30MHz	Dec. 01, 2010	Nov. 30, 2011	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
System Simulator	R&S	CMU200	117591	N/A	Oct. 18, 2010	Oct. 17, 2011	Conduction (CO05-HY)
GPS Station	T&E	GS-50	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
Spectrum Analyzer	R&S	FSP40	100057	9KHz-40GHz	Oct. 25, 2010	Oct. 24, 2011	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESVS10	834468/003	20MHz-1000MHz	May 10, 2011	May 09, 2012	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz -2GHz	Oct. 31, 2010	Oct. 31, 2011	Radiation (03CH06-HY)
Double Ridge Horn Antenna	EMCO	3117	00066583	1GHz~18GHz	Aug. 01, 2011	Jul. 31, 2012	Radiation (03CH06-HY)
Double Ridge Horn Antenna	Training Research	AH-0801	95119	8GHz~18GHz	Oct. 20, 2010	Oct. 19, 2011	Radiation (03CH06-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz- 40GHz	Oct. 18, 2010	Oct. 17, 2011	Radiation (03CH06-HY)
Pre Amplifier	Agilent	8449B	3008A01917	1GHz- 26.5GHz	Apr. 14, 2011	Apr. 13, 2012	Radiation (03CH06-HY)
Amplifier	Agilent	310N	186713	9KHz~1GHz	Apr. 14, 2011	Apr. 13, 2012	Radiation (03CH06-HY)
Bluetooth Base Station	R&S	CBT32	100522	N/A	Jan.13, 2011	Jan.13, 2013	Radiation (03CH06-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
Combined Standard Uncertainty $U_c(y)$	1.13		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.26		

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	± 0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	± 1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	± 0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	± 2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	± 1.50	Rectangular	0.87	1	0.87
Site Imperfection	± 2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				



Appendix A. Photographs of EUT

Please refer to Sporton report number EP172802-02 as below.