

FCC RF Test Report

APPLICANT : Acer Incorporated
EQUIPMENT : Smart HandHeld
BRAND NAME : Acer
MODEL NAME : S55
MARKETING NAME : Liquid Jade
FCC ID : HLZDMS55
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Jul. 09, 2014 and testing was completed on Jul. 29, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification subjective to this standard	6
1.5 Modification of EUT	7
1.6 Testing Location	7
1.7 Applicable Standards.....	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Carrier Frequency Channel	9
2.2 Pre-Scanned RF Power.....	10
2.3 Test Mode.....	12
2.4 Connection Diagram of Test System.....	13
2.5 Support Unit used in test configuration and system	14
2.6 EUT Operation Test Setup	14
2.7 Measurement Results Explanation Example.....	14
3 TEST RESULT.....	15
3.1 6dB and 99% Bandwidth Measurement	15
3.2 Output Power Measurement.....	17
3.3 Power Spectral Density Measurement	20
3.4 Conducted Band Edges and Spurious Emission Measurement	22
3.5 Radiated Band Edges and Spurious Emission Measurement	35
3.6 AC Conducted Emission Measurement.....	57
3.7 Antenna Requirements.....	61
4 LIST OF MEASURING EQUIPMENT	62
5 UNCERTAINTY OF EVALUATION	63
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR470901C	Rev. 01	Initial issue of report	Aug. 06, 2014



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	RSS-210 A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	RSS-Gen 4.6.1	99% Bandwidth	-	Pass	-
3.2	15.247(b)	RSS-210 A8.4	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	RSS-210 A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	RSS-210 A8.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
			Conducted Spurious Emission		Pass	-
3.5	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 4.39 dB at 31.350 MHz
3.6	15.207	RSS-Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 8.39 dB at 0.430 MHz
3.7	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

Acer Incorporated

8F, No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 22181, Taiwan (R.O.C)

1.2 Manufacturer

Shanghai Sunrise Simcom Limited

No. 888, Shengli Rd., Qingpu, Shanghai, P.R. China 201700

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart HandHeld
Brand Name	Acer
Model Name	S55
Marketing Name	Liquid Jade
FCC ID	HLZDMS55
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/HSPA+(Downlink Only)/NFC/WLAN 2.4GHz 802.11b/g/n HT20/HT40/Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	802.11b/g/n : 2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to Antenna	802.11b : 13.03 dBm (0.0201 W) 802.11g : 19.77 dBm (0.0948 W) 802.11n HT20 : 17.97 dBm (0.0627 W) 802.11n HT40 : 14.05 dBm (0.0254 W)
99% Occupied Bandwidth	802.11b : 14.50MHz 802.11g : 17.75MHz 802.11n HT20 : 18.50MHz 802.11n HT40 : 36.70MHz
Antenna Type	802.11b/g/n : PIFA Antenna with gain 0.07 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH02-HY	03CH05-HY	TW1022/4086B-1

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	CO01-KS		149928/4086E-1



1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issue 8
- ♦ IC RSS-Gen Issue 3
- ♦ NOTICE 2012-DRS0126

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. Per the section 2.2.3 of Notice of 2012-DRS0126, “ Receivers Excluded from Industry Canada Requirements”, only radiocommunication receivers operating in stand-alone mode within the band 30-960 MHz and scanner receivers are subject to Industry Canada requirements.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

2.4GHz 802.11b RF Power (dBm)						
Power vs. Channel			Power vs. Data Rate			
Channel	Frequency (MHz)	Data Rate	Channel	2Mbps	5.5Mbps	11Mbps
		1Mbps				
CH 01	2412	12.91	CH 06	12.98	13.01	12.94
CH 06	2437	13.03				
CH 11	2462	12.75				

2.4GHz 802.11g RF Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps								
CH 01	2412	19.31	CH 11	19.63	19.57	19.65	19.49	19.64	19.45	19.56
CH 06	2437	19.59								
CH 11	2462	19.77								

2.4GHz 802.11n HT20 RF Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0								
CH 01	2412	17.73	CH 06	17.81	17.75	17.78	17.47	17.47	17.52	17.31
CH 06	2437	17.97								
CH 11	2462	17.46								



2.4GHz 802.11n HT40 RF Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0								
CH 03	2422 MHz	13.93	CH 06	12.55	12.77	12.58	11.77	11.70	11.82	11.85
CH 06	2437 MHz	14.05								
CH 09	2452 MHz	13.73								


2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
Conducted TCs	Test Items	Mode	Data Rate	Test Channel
	6dB and 99% BW Power Spectral Density	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
		802.11n HT40	MCS0	3/6/9
	Output Power	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
		802.11n HT40	MCS0	3/6/9
	Conducted Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
		802.11n HT40	MCS0	3/9
	Conducted Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
802.11n HT40		MCS0	3/6/9	
Radiated TCs	Radiated Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
		802.11n HT40	MCS0	3/9
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
		802.11n HT40	MCS0	3/6/9
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + NFC Tx + Earphone + USB Cable (Charging from Adapter)			
Remark: For Radiated TCs, the tests were performed with adapter, earphone and USB cable.				

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

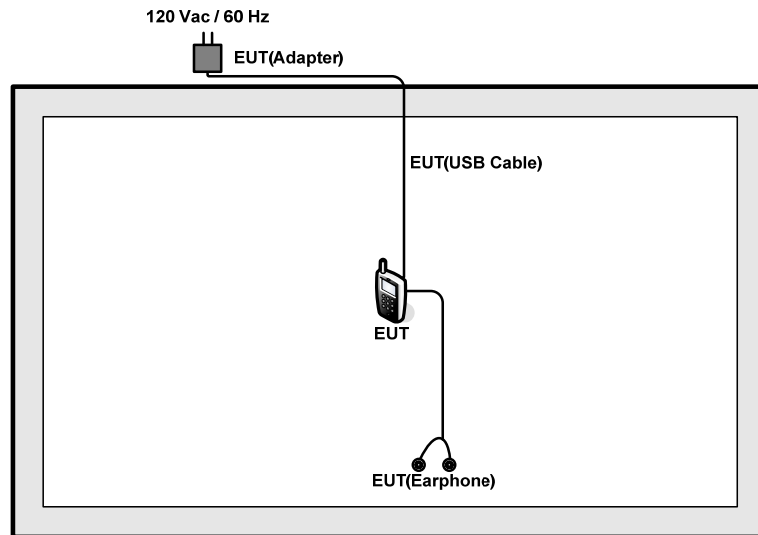

<AC Conducted Emission Mode>

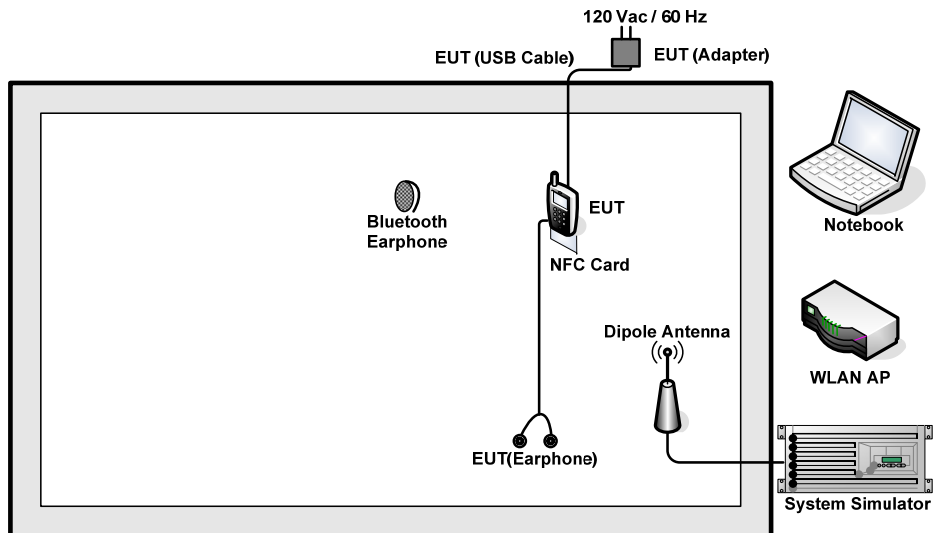

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 0.9 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Lenovo	LBH505	N/A	N/A	N/A
5.	NFC Card	N/A	N/A	N/A	N/A	N/A

2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.4 dB and 20dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 5.4 + 20 = 25.4 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup

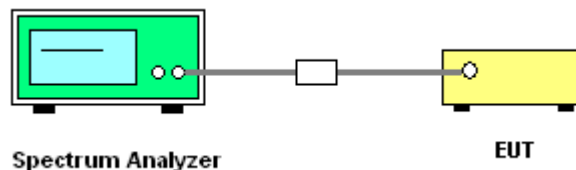




3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Test Band :	2.4GHz	Temperature :	21~25°C
Test Engineer :	Alex Lee	Relative Humidity :	51~54%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	99% Bandwidth (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	14.50	10.04	0.50	Pass
11b	1Mbps	1	6	2437	14.50	10.08	0.50	Pass
11b	1Mbps	1	11	2462	14.50	10.04	0.50	Pass
11g	6Mbps	1	1	2412	17.75	16.34	0.50	Pass
11g	6Mbps	1	6	2437	17.65	16.36	0.50	Pass
11g	6Mbps	1	11	2462	17.70	16.36	0.50	Pass
HT20	MCS0	1	1	2412	18.50	17.60	0.50	Pass
HT20	MCS0	1	6	2437	18.45	17.56	0.50	Pass
HT20	MCS0	1	11	2462	18.50	17.60	0.50	Pass
HT40	MCS0	1	3	2422	36.50	36.08	0.50	Pass
HT40	MCS0	1	6	2437	36.70	36.08	0.50	Pass
HT40	MCS0	1	9	2452	36.50	36.24	0.50	Pass

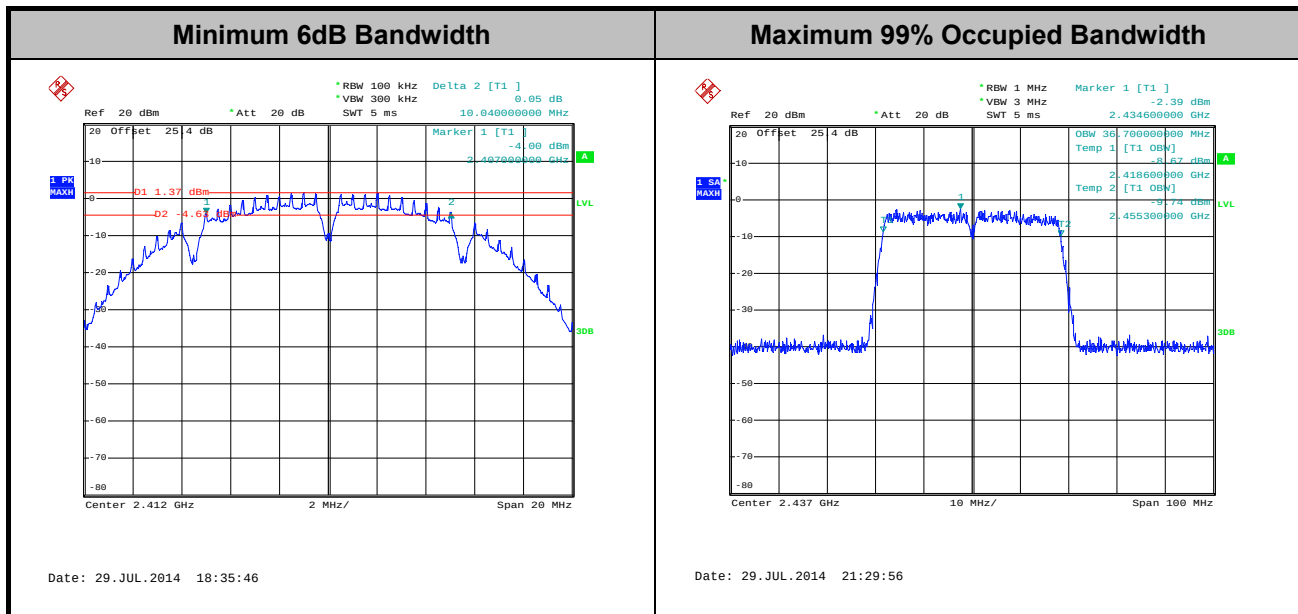

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

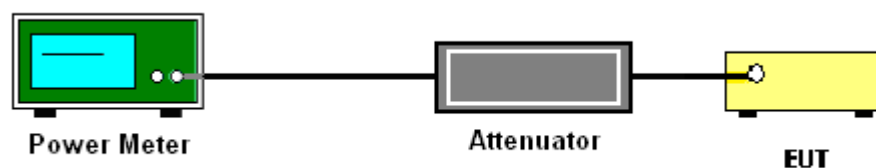

**3.2.5 Test Result of Peak Output Power**

Test Mode :	2.4GHz	Temperature :	21~25℃
Test Engineer :	Alex Lee	Relative Humidity :	51~54%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	RF Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	12.91	30.00	0.07	Pass
11b	1Mbps	1	6	2437	13.03	30.00	0.07	Pass
11b	1Mbps	1	11	2462	12.75	30.00	0.07	Pass
11g	6Mbps	1	1	2412	19.31	30.00	0.07	Pass
11g	6Mbps	1	6	2437	19.59	30.00	0.07	Pass
11g	6Mbps	1	11	2462	19.77	30.00	0.07	Pass
HT20	MCS0	1	1	2412	17.73	30.00	0.07	Pass
HT20	MCS0	1	6	2437	17.97	30.00	0.07	Pass
HT20	MCS0	1	11	2462	17.46	30.00	0.07	Pass
HT40	MCS0	1	3	2422	13.93	30.00	0.07	Pass
HT40	MCS0	1	6	2437	14.05	30.00	0.07	Pass
HT40	MCS0	1	9	2452	13.73	30.00	0.07	Pass

Note: Measured power (dBm) has offset with cable loss.

**3.2.6 Test Result of Average output Power (Reporting Only)**

Test Mode :	2.4GHz	Temperature :	21~25℃
Test Engineer :	Alex Lee	Relative Humidity :	51~54%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	Duty Factor (dB)	Average Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	0.08	10.92	30.00	0.07	Pass
11b	1Mbps	1	6	2437	0.08	10.99	30.00	0.07	Pass
11b	1Mbps	1	11	2462	0.08	10.78	30.00	0.07	Pass
11g	6Mbps	1	1	2412	0.50	9.22	30.00	0.07	Pass
11g	6Mbps	1	6	2437	0.50	9.35	30.00	0.07	Pass
11g	6Mbps	1	11	2462	0.50	9.44	30.00	0.07	Pass
HT20	MCS0	1	1	2412	0.53	7.20	30.00	0.07	Pass
HT20	MCS0	1	6	2437	0.53	7.36	30.00	0.07	Pass
HT20	MCS0	1	11	2462	0.53	7.11	30.00	0.07	Pass
HT40	MCS0	1	3	2422	1.01	2.85	30.00	0.07	Pass
HT40	MCS0	1	6	2437	1.01	2.98	30.00	0.07	Pass
HT40	MCS0	1	9	2452	1.01	2.68	30.00	0.07	Pass

Note: Measured power (dBm) has offset with cable loss and duty factor.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

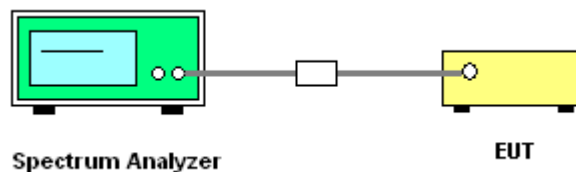




3.3.5 Test Result of Power Spectral Density

Test Mode :	2.4GHz	Temperature :	21~25°C
Test Engineer :	Alex Lee	Relative Humidity :	51~54%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	Peak Power Density (dBm/3kHz)	Max. Limits (dBm/3kHz)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	-11.37	8.00	0.07	Pass
11b	1Mbps	1	6	2437	-12.45	8.00	0.07	Pass
11b	1Mbps	1	11	2462	-13.65	8.00	0.07	Pass
11g	6Mbps	1	1	2412	-16.66	8.00	0.07	Pass
11g	6Mbps	1	6	2437	-17.12	8.00	0.07	Pass
11g	6Mbps	1	11	2462	-15.45	8.00	0.07	Pass
HT20	MCS0	1	1	2412	-19.17	8.00	0.07	Pass
HT20	MCS0	1	6	2437	-18.50	8.00	0.07	Pass
HT20	MCS0	1	11	2462	-18.27	8.00	0.07	Pass
HT40	MCS0	1	3	2422	-25.31	8.00	0.07	Pass
HT40	MCS0	1	6	2437	-24.50	8.00	0.07	Pass
HT40	MCS0	1	9	2452	-25.17	8.00	0.07	Pass

Note: Measured power density (dBm) has offset with cable loss.

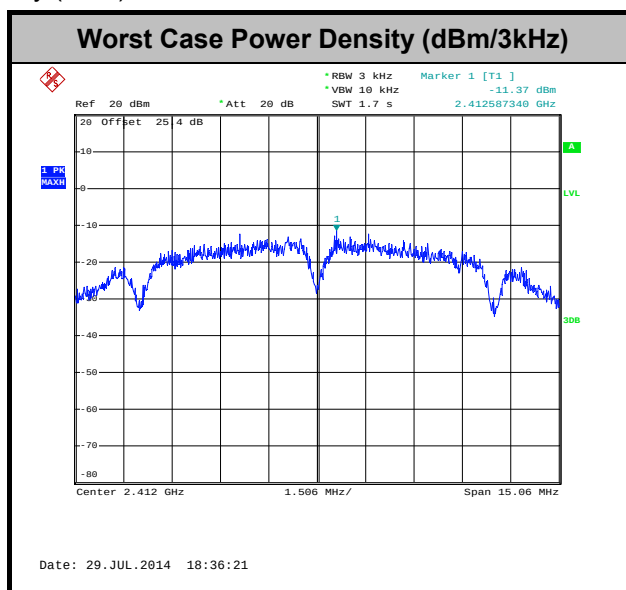

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

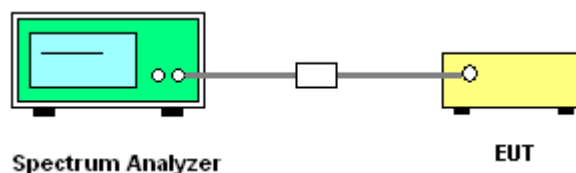




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Alex Lee


WLAN 802.11b Channel 01

100kHz PSD reference Level

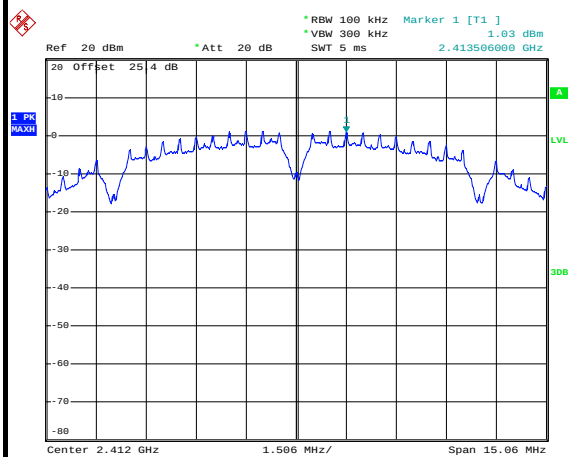


Date: 29.JUL.2014 18:36:49

Low Channel Plot

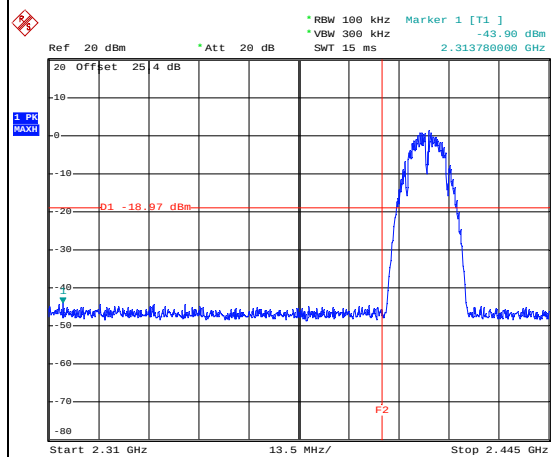


Date: 29.JUL.2014 18:37:15

Spurious Emission 30MHz~3GHz

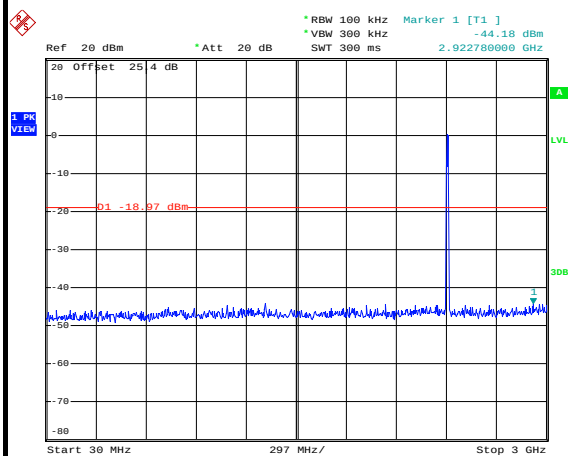

Date: 29.JUL.2014 18:37:50

Spurious Emission 2GHz~25GHz

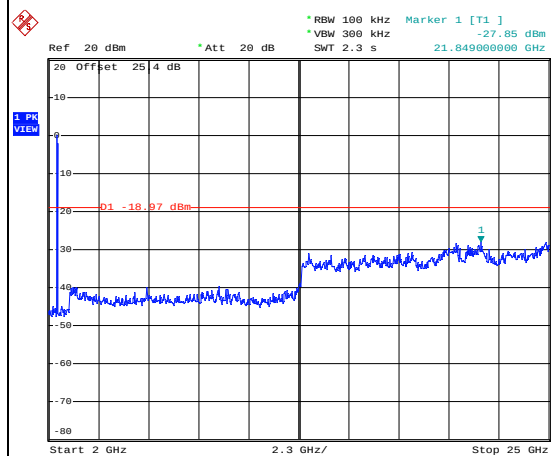


Date: 29.JUL.2014 18:38:08



Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Alex Lee


WLAN 802.11b Channel 06

100kHz PSD reference Level

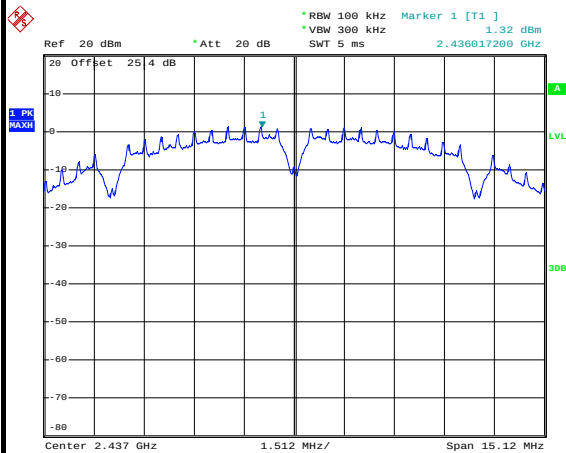


Date: 29.JUL.2014 18:40:53

Spurious Emission 30MHz~3GHz

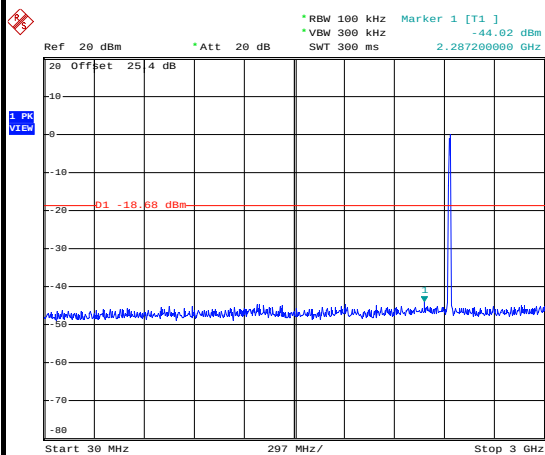

Date: 29.JUL.2014 18:41:31

Spurious Emission 2GHz~25GHz

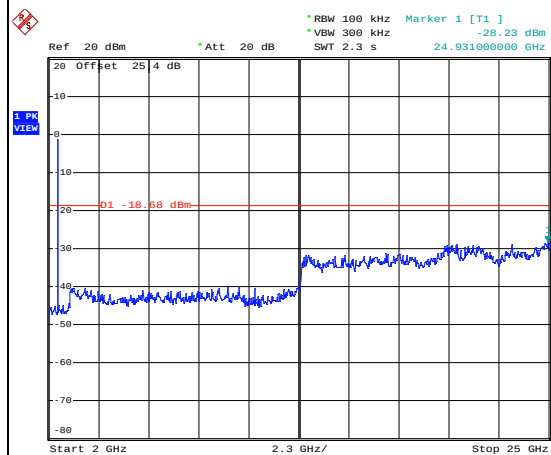


Date: 29.JUL.2014 18:41:49



Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Alex Lee


WLAN 802.11b Channel 11

100kHz PSD reference Level

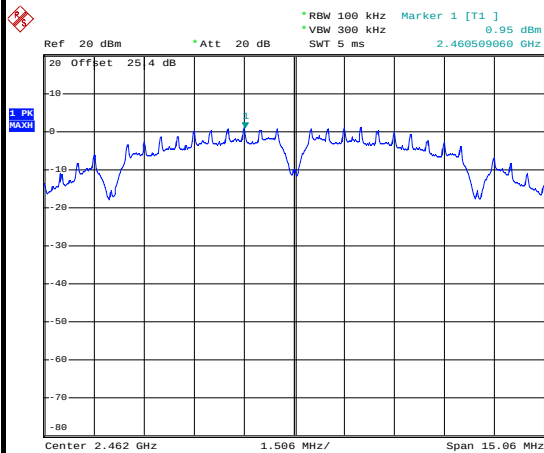


Date: 29.JUL.2014 18:45:01

High Channel Plot

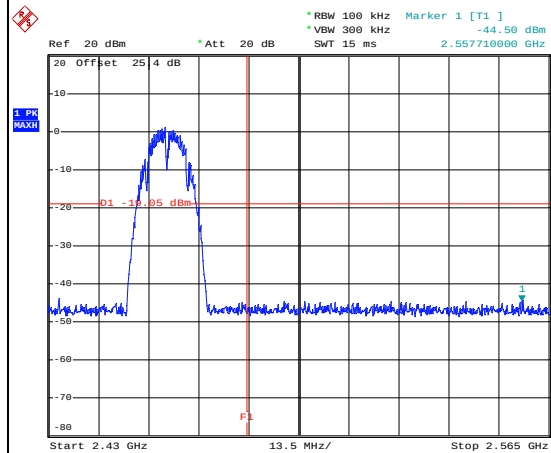


Date: 29.JUL.2014 18:45:34

Spurious Emission 30MHz~3GHz

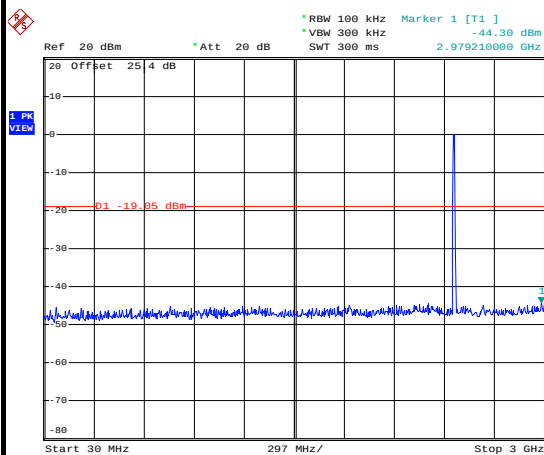

Date: 29.JUL.2014 18:46:03

Spurious Emission 2GHz~25GHz

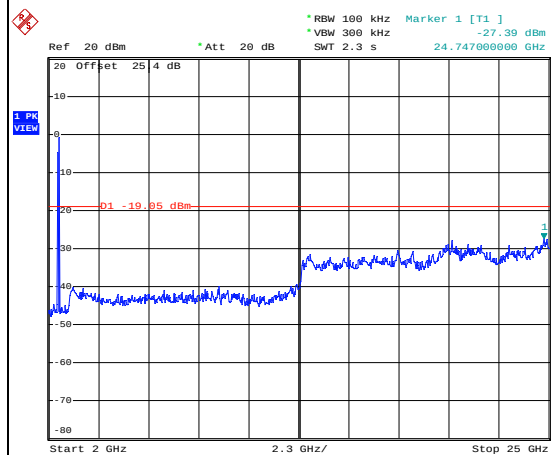


Date: 29.JUL.2014 18:46:21



Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Alex Lee


WLAN 802.11g Channel 01

100kHz PSD reference Level

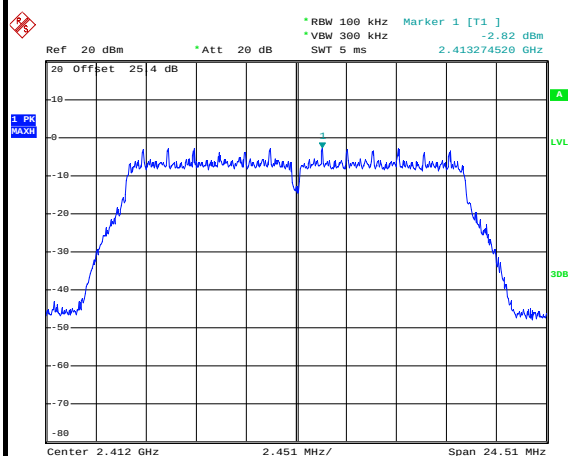


Date: 29.JUL.2014 19:14:20

Low Channel Plot

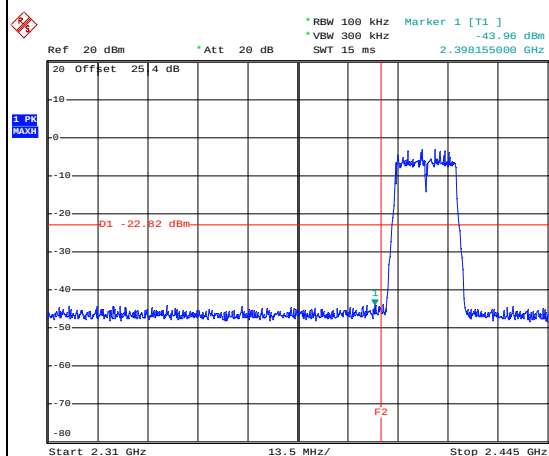


Date: 29.JUL.2014 19:14:51

Spurious Emission 30MHz~3GHz

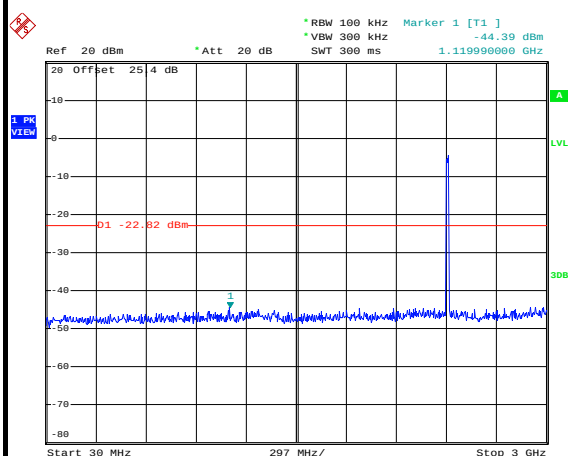

Date: 29.JUL.2014 19:17:14

Spurious Emission 2GHz~25GHz

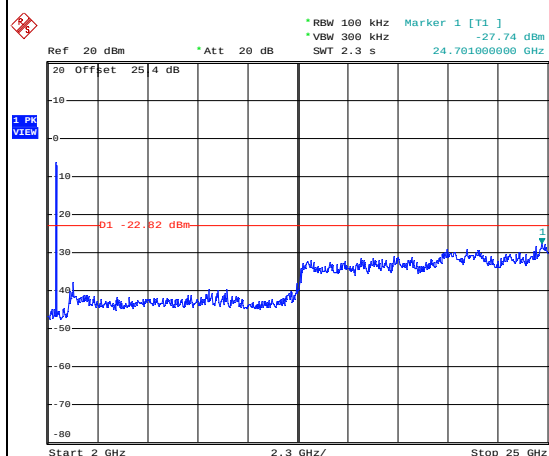


Date: 29.JUL.2014 19:17:32



Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Alex Lee


WLAN 802.11g Channel 06

100kHz PSD reference Level

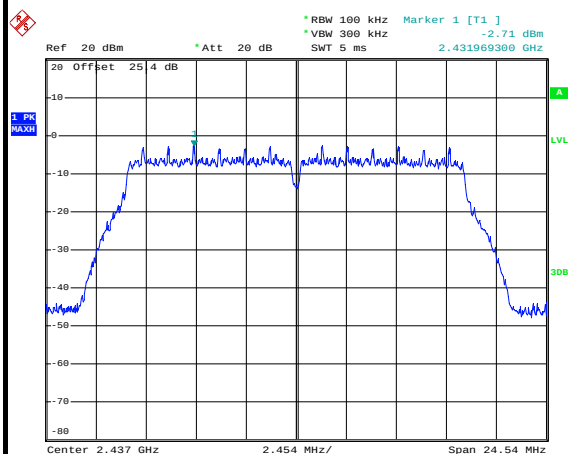


Date: 29.JUL.2014 18:59:13

Spurious Emission 30MHz~3GHz

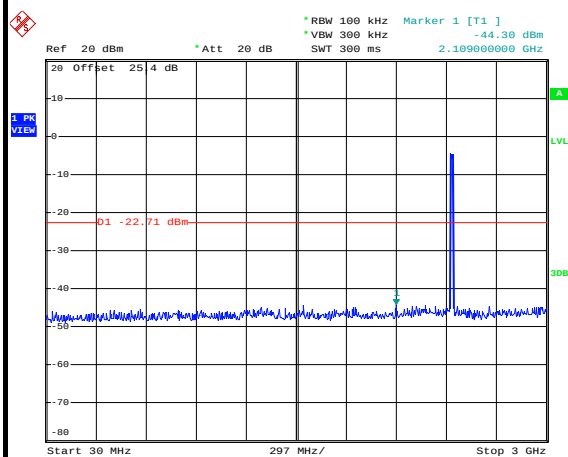

Date: 29.JUL.2014 21:53:02

Spurious Emission 2GHz~25GHz

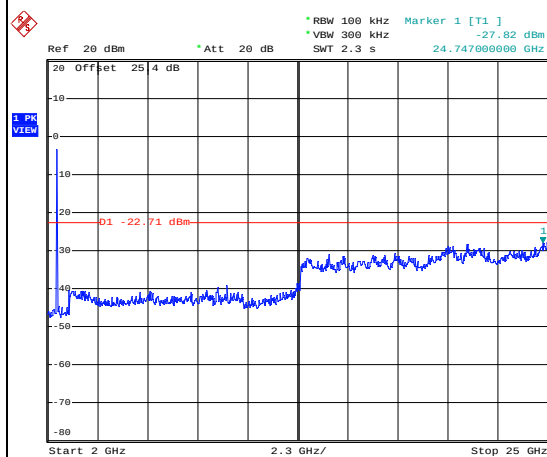


Date: 29.JUL.2014 21:53:20



Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Alex Lee


WLAN 802.11g Channel 11

100kHz PSD reference Level

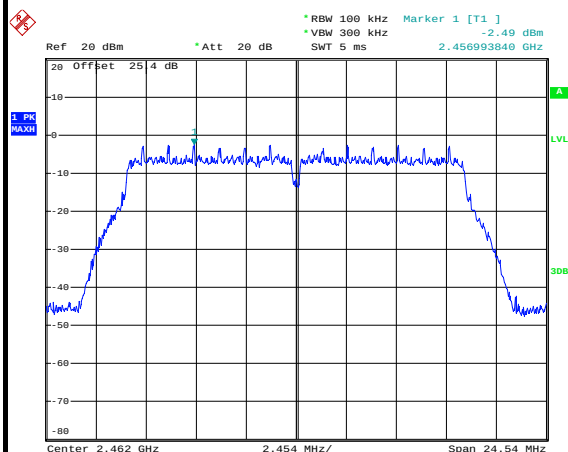


Date: 29.JUL.2014 18:55:38

High Channel Plot

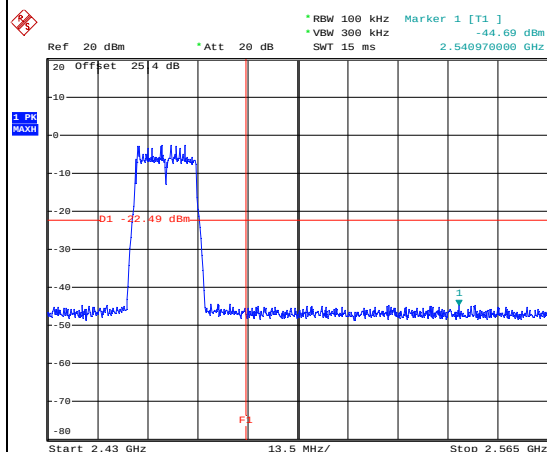


Date: 29.JUL.2014 18:56:01

Spurious Emission 30MHz~3GHz

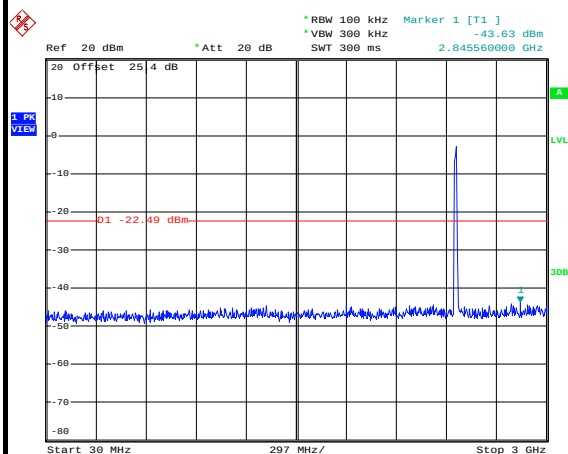

Date: 29.JUL.2014 18:56:23

Spurious Emission 2GHz~25GHz

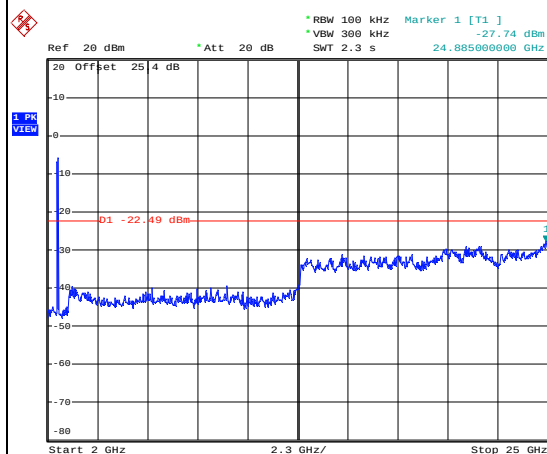


Date: 29.JUL.2014 18:56:41



Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Alex Lee


WLAN 802.11n HT20 Channel 01

100kHz PSD reference Level

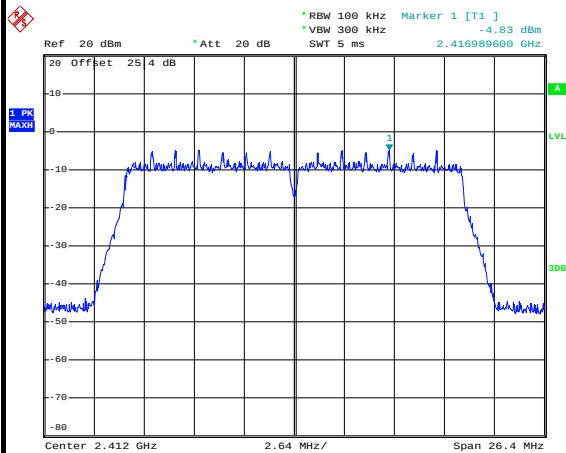


Date: 29.JUL.2014 19:45:03

Low Channel Plot

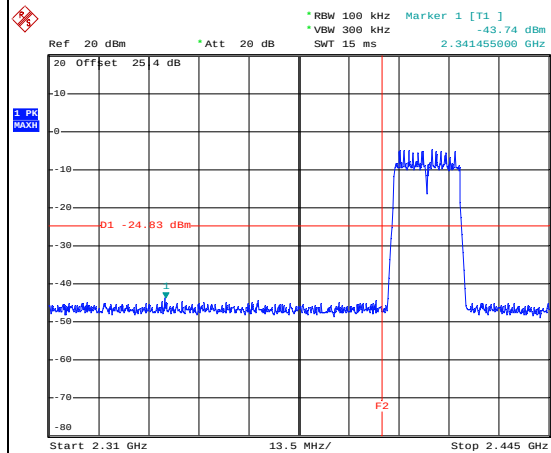


Date: 29.JUL.2014 19:45:25

Spurious Emission 30MHz~3GHz

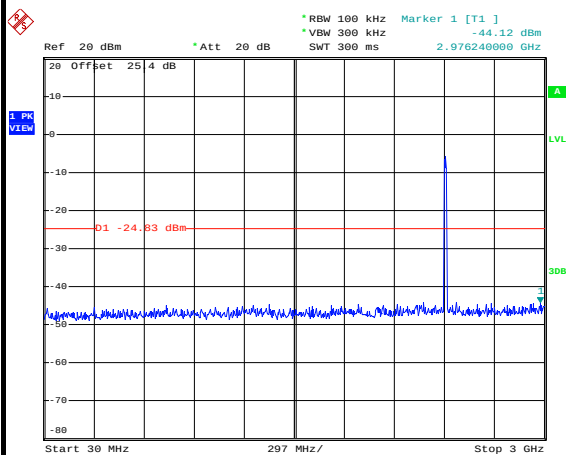

Date: 29.JUL.2014 19:48:26

Spurious Emission 2GHz~25GHz

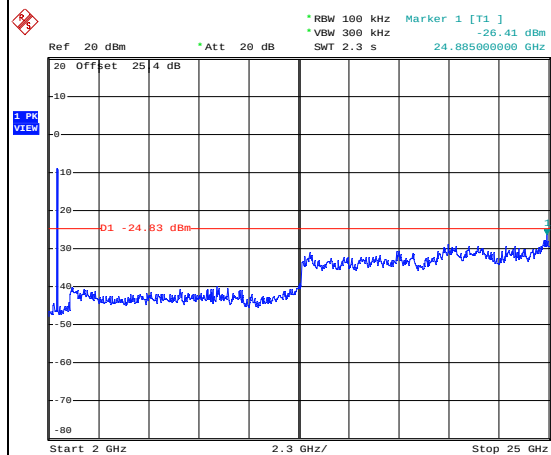


Date: 29.JUL.2014 19:48:44



Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Alex Lee


WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

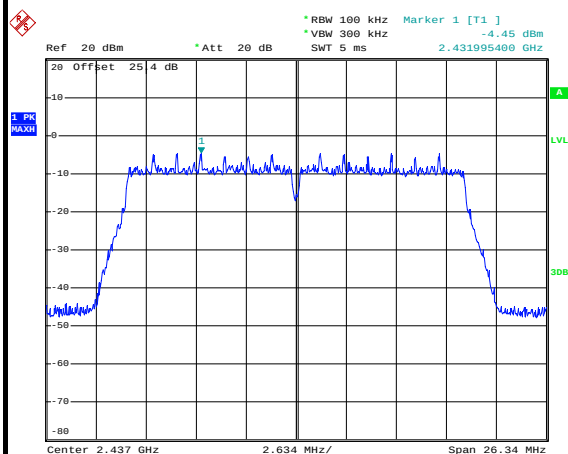


Date: 29.JUL.2014 19:54:56

Spurious Emission 30MHz~3GHz

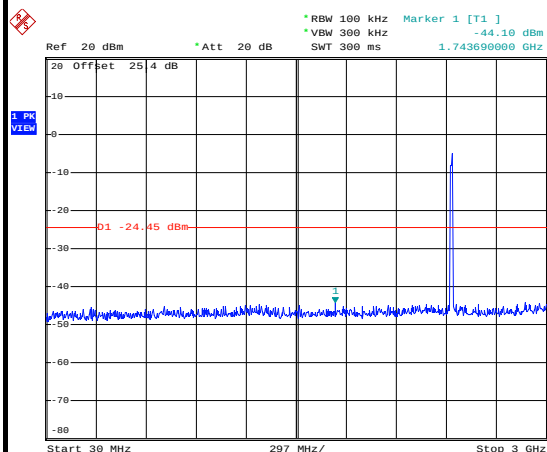

Date: 29.JUL.2014 20:18:51

Spurious Emission 2GHz~25GHz

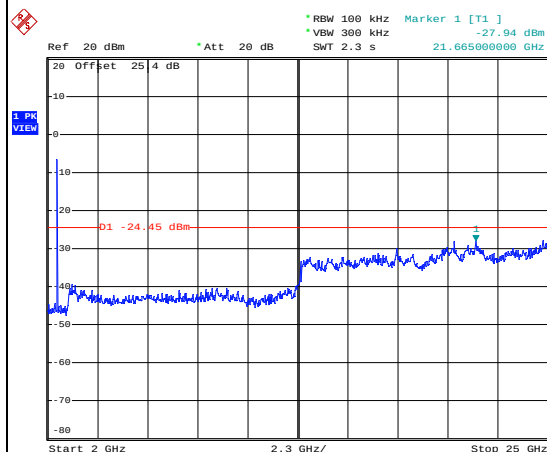


Date: 29.JUL.2014 20:19:09



Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Alex Lee


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

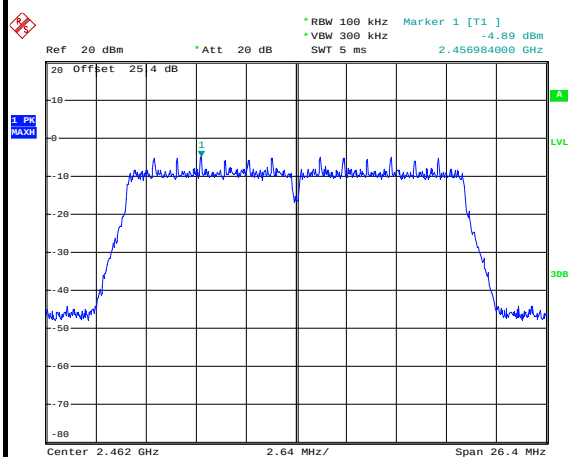


Date: 29.JUL.2014 20:37:09

High Channel Plot

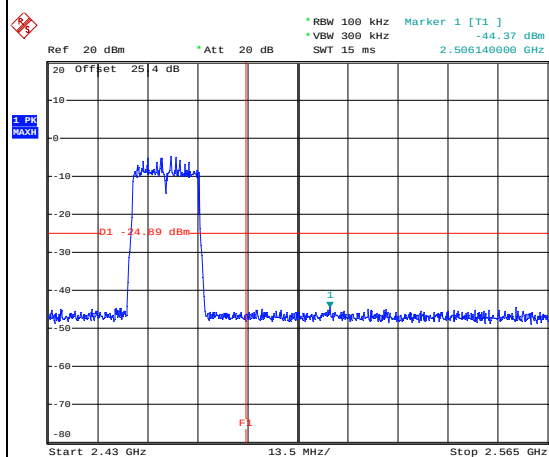


Date: 29.JUL.2014 20:37:37

Spurious Emission 30MHz~3GHz

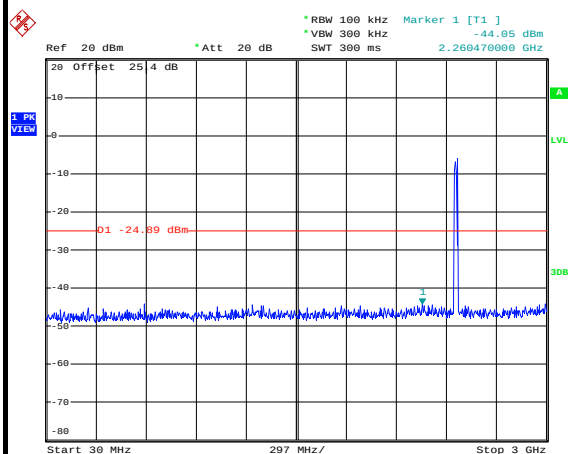

Date: 29.JUL.2014 21:00:47

Spurious Emission 2GHz~25GHz

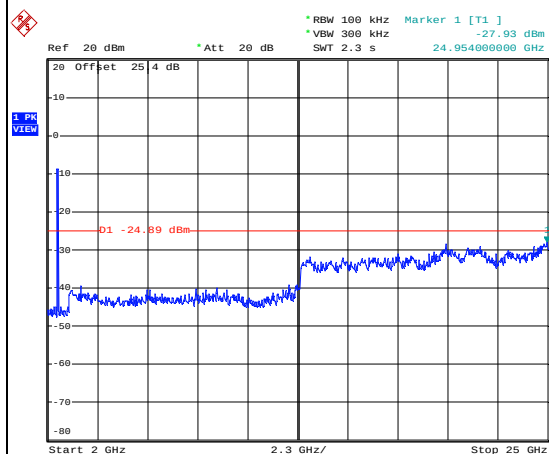


Date: 29.JUL.2014 21:01:05



Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	03	Test Engineer :	Alex Lee


WLAN 802.11n HT40 Channel 03

100kHz PSD reference Level

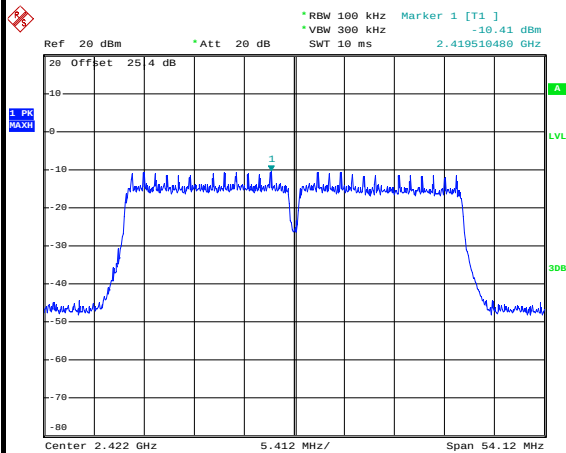


Date: 29.JUL.2014 21:37:33

Low Channel Plot

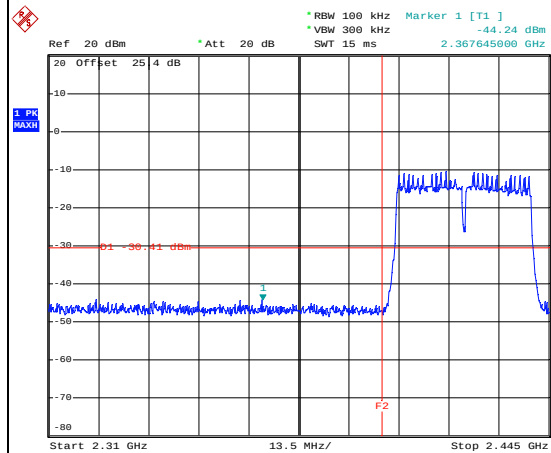


Date: 29.JUL.2014 21:37:56

Spurious Emission 30MHz~3GHz

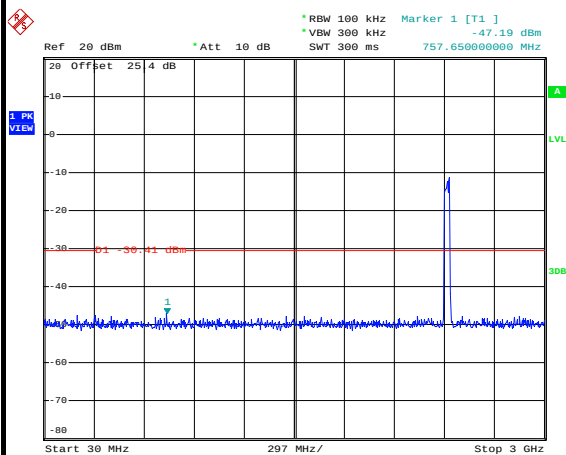

Date: 29.JUL.2014 21:40:11

Spurious Emission 2GHz~25GHz

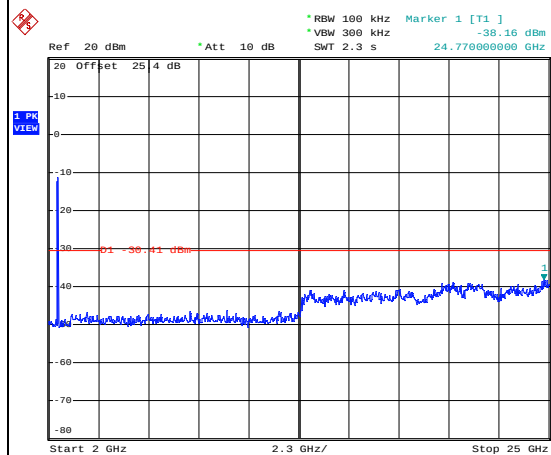


Date: 29.JUL.2014 21:40:29



Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Alex Lee


WLAN 802.11n HT40 Channel 06

100kHz PSD reference Level

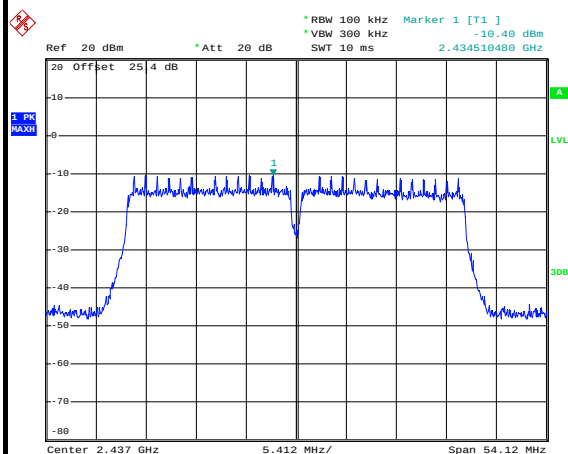


Date: 29.JUL.2014 21:28:13

Spurious Emission 30MHz~3GHz

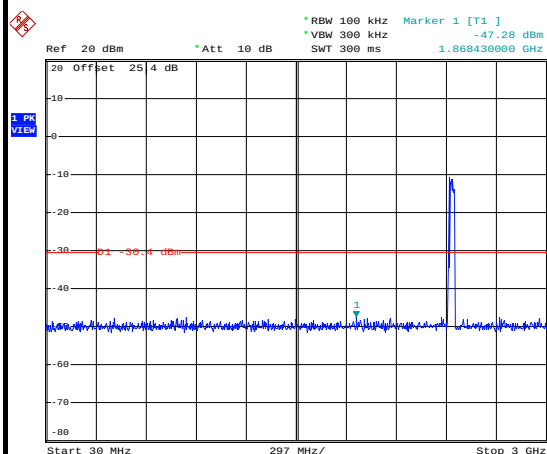

Date: 29.JUL.2014 21:29:23

Spurious Emission 2GHz~25GHz

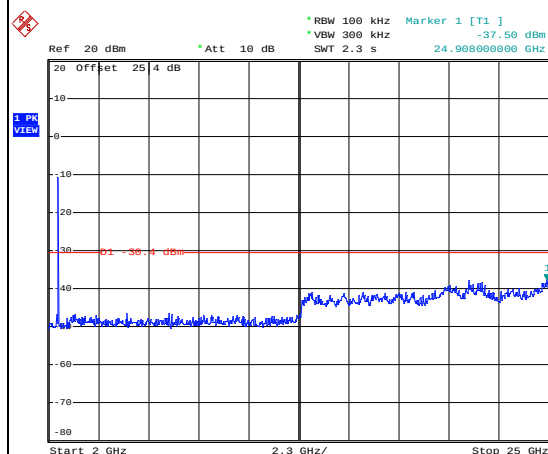


Date: 29.JUL.2014 21:29:41



Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	09	Test Engineer :	Alex Lee


WLAN 802.11n HT40 Channel 09

100kHz PSD reference Level

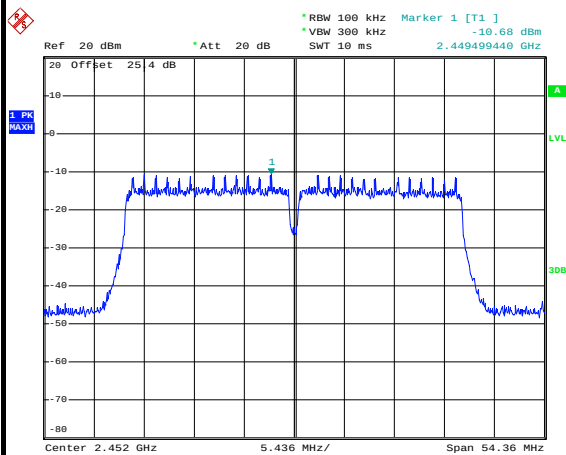


Date: 29.JUL.2014 21:33:04

High Channel Plot

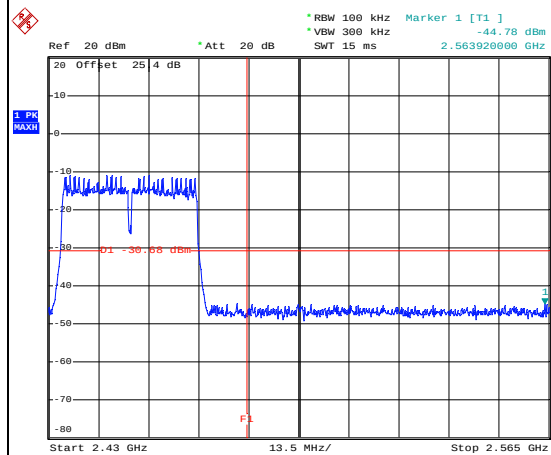


Date: 29.JUL.2014 21:33:37

Spurious Emission 30MHz~3GHz

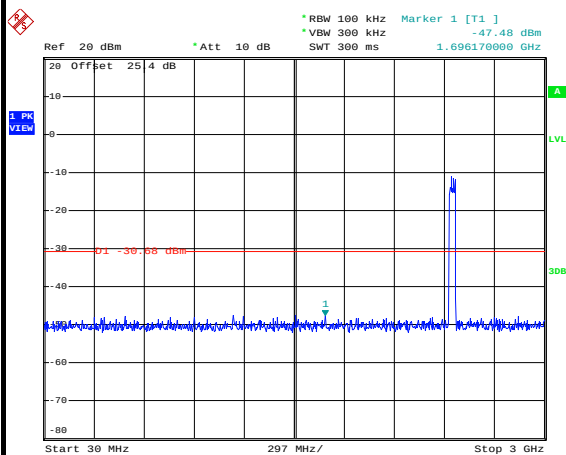

Date: 29.JUL.2014 21:49:29

Spurious Emission 2GHz~25GHz

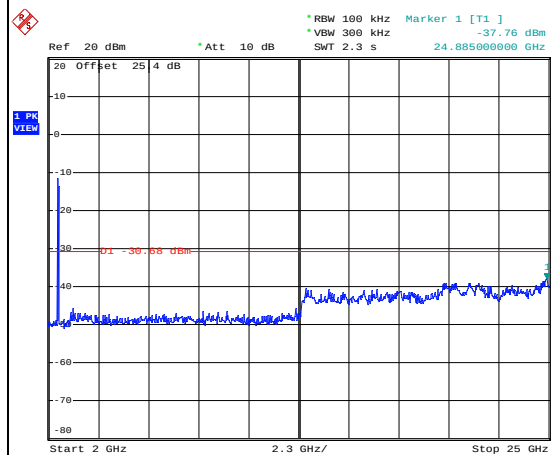

Date: 29.JUL.2014 21:48:11

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.


For average measurement:

 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	98.13	-	-	10Hz
802.11g	89.17	1.40	0.71	1kHz
2.4GHz 802.11n HT20	88.51	1.31	0.76	1kHz
2.4GHz 802.11n HT40	79.27	0.65	1.54	3kHz

3.5.4 Test Setup


For radiated emissions below 30MHz

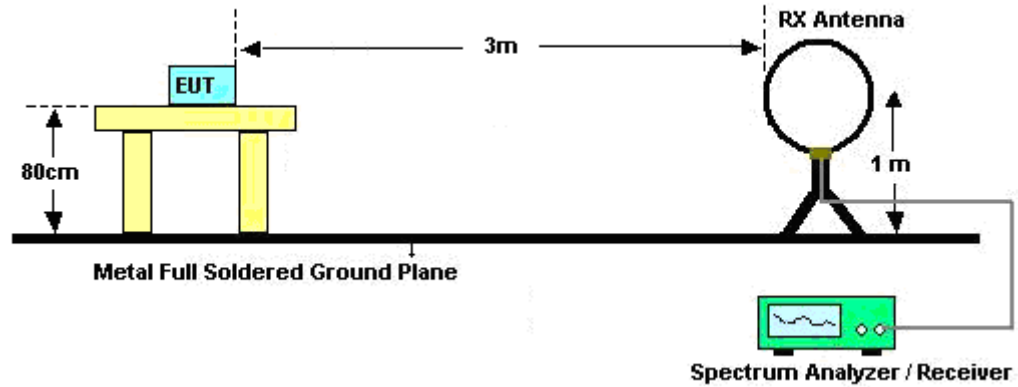

For radiated emissions from 30MHz to 1GHz

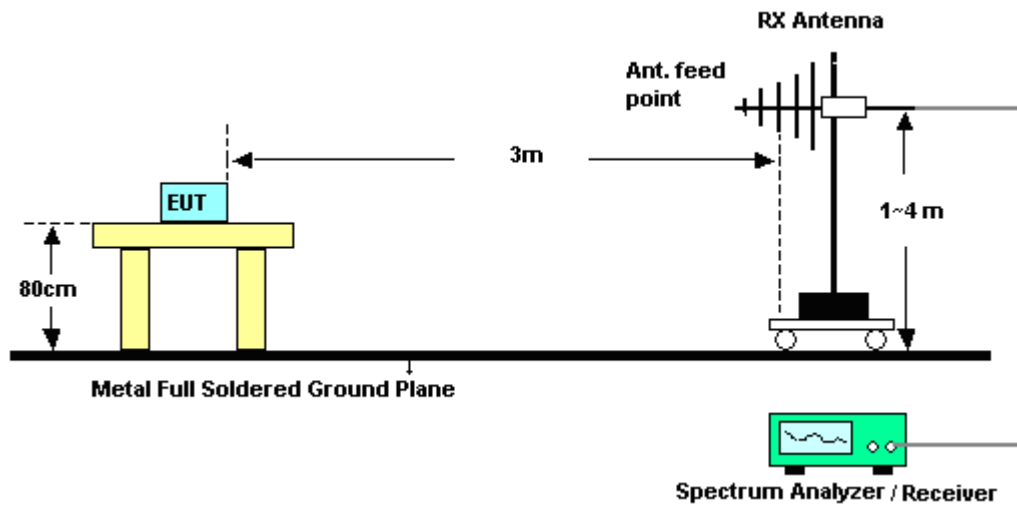

For radiated emissions above 1GHz

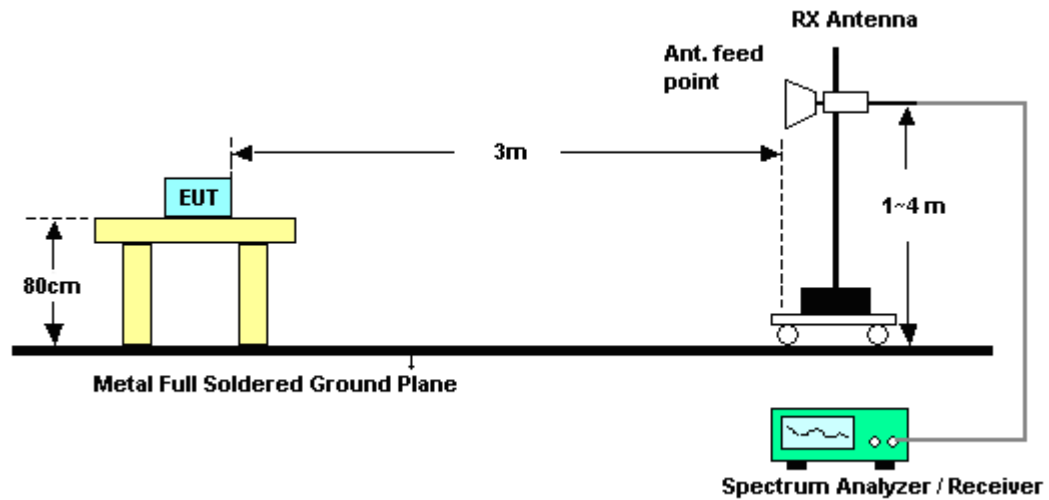

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Test Mode :	802.11b	Temperature :	25~26°C
Test Band :	Low	Relative Humidity :	50~51%
Test Channel :	01	Test Engineer :	Jet Lui

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.38	48.92	-25.08	74	51.02	26.93	4.62	33.65	100	347	Peak
2390	33.88	-20.12	54	35.98	26.93	4.62	33.65	100	347	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.74	46.26	-27.74	74	48.36	26.93	4.62	33.65	126	126	Peak
2390	31.26	-22.74	54	33.36	26.93	4.62	33.65	126	126	Average

Test Mode :	802.11b	Temperature :	25~26°C
Test Band :	High	Relative Humidity :	50~51%
Test Channel :	11	Test Engineer :	Jet Lui

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2486.59	45.47	-28.53	74	47.15	27.16	4.73	33.57	121	333	Peak
2500	32.06	-21.94	54	33.69	27.2	4.73	33.56	121	333	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2493.85	46.12	-27.88	74	47.75	27.2	4.73	33.56	100	92	Peak
2500	32.29	-21.71	54	33.92	27.2	4.73	33.56	100	92	Average



Test Mode :	802.11g	Temperature :	25~26°C
Test Band :	Low	Relative Humidity :	50~51%
Test Channel :	01	Test Engineer :	Jet Lui

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.74	53.12	-20.88	74	55.22	26.93	4.62	33.65	100	345	Peak
2389.83	38.43	-15.57	54	40.53	26.93	4.62	33.65	100	345	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.83	51.07	-22.93	74	53.17	26.93	4.62	33.65	126	93	Peak
2389.83	36.75	-17.25	54	38.85	26.93	4.62	33.65	126	93	Average

Test Mode :	802.11g	Temperature :	25~26°C
Test Band :	High	Relative Humidity :	50~51%
Test Channel :	11	Test Engineer :	Jet Lui

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.77	56.02	-17.98	74	57.7	27.16	4.73	33.57	100	334	Peak
2483.8	37.96	-16.04	54	39.64	27.16	4.73	33.57	100	334	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.89	52.8	-21.2	74	54.48	27.16	4.73	33.57	103	44	Peak
2483.5	37.86	-16.14	54	39.54	27.16	4.73	33.57	103	44	Average



Test Mode :	802.11n HT20	Temperature :	25~26°C
Test Band :	Low	Relative Humidity :	50~51%
Test Channel :	01	Test Engineer :	Jet Lui

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.56	51.47	-22.53	74	53.57	26.93	4.62	33.65	100	347	Peak
2389.65	36.72	-17.28	54	38.82	26.93	4.62	33.65	100	347	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.65	47.83	-26.17	74	49.93	26.93	4.62	33.65	127	125	Peak
2389.83	34.62	-19.38	54	36.72	26.93	4.62	33.65	127	125	Average

Test Mode :	802.11n HT20	Temperature :	25~26°C
Test Band :	High	Relative Humidity :	50~51%
Test Channel :	11	Test Engineer :	Jet Lui

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.98	47.27	-26.73	74	48.95	27.16	4.73	33.57	100	335	Peak
2483.95	34.37	-19.63	54	36.05	27.16	4.73	33.57	100	335	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.13	46.67	-27.33	74	48.35	27.16	4.73	33.57	100	125	Peak
2495.83	33.37	-20.63	54	35	27.2	4.73	33.56	100	125	Average



Test Mode :	802.11n HT40	Temperature :	25~26°C
Test Band :	Low	Relative Humidity :	50~51%
Test Channel :	03	Test Engineer :	Jet Lui

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.2	47.72	-26.28	74	49.82	26.93	4.62	33.65	125	334	Peak
2386.59	33.22	-20.78	54	35.32	26.93	4.62	33.65	125	334	Average
2485.24	42.25	-31.75	74	43.93	27.16	4.73	33.57	125	334	Peak
2483.89	29.11	-24.89	54	30.79	27.16	4.73	33.57	125	334	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.84	45.6	-28.4	74	47.7	26.93	4.62	33.65	127	126	Peak
2389.92	31.47	-22.53	54	33.57	26.93	4.62	33.65	127	126	Average
2491.81	41.35	-32.65	74	42.98	27.2	4.73	33.56	127	126	Peak
2483.74	28.56	-25.44	54	30.24	27.16	4.73	33.57	127	126	Average



Test Mode :	802.11n HT40	Temperature :	25~26°C
Test Band :	High	Relative Humidity :	50~51%
Test Channel :	09	Test Engineer :	Jet Lui

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.12	44.06	-29.94	74	46.16	26.93	4.62	33.65	100	334	Peak
2389.65	32.11	-21.89	54	34.21	26.93	4.62	33.65	100	334	Average
2483.68	45.31	-28.69	74	46.99	27.16	4.73	33.57	100	334	Peak
2484.04	32.8	-21.2	54	34.48	27.16	4.73	33.57	100	334	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.48	42.21	-31.79	74	44.31	26.93	4.62	33.65	102	93	Peak
2389.92	30.49	-23.51	54	32.59	26.93	4.62	33.65	102	93	Average
2485.48	44.34	-29.66	74	46.02	27.16	4.73	33.57	102	93	Peak
2483.71	31.38	-22.62	54	33.06	27.16	4.73	33.57	102	93	Average

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Note: Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

Test Mode :	802.11b	Temperature :	25~26°C
Test Channel :	01	Relative Humidity :	50~51%
Test Engineer :	Jet Lui	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	92.67	-	-	94.67	26.98	4.65	33.63	100	347	Average
2412	99.28	-	-	101.28	26.98	4.65	33.63	100	347	Peak
4824	35.68	-38.32	74	56.86	31.22	6.54	58.94	100	0	Peak

Test Mode :	802.11b	Temperature :	25~26°C
Test Channel :	01	Relative Humidity :	50~51%
Test Engineer :	Jet Lui	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	91.23	-	-	93.23	26.98	4.65	33.63	126	126	Average
2412	97.57	-	-	99.57	26.98	4.65	33.63	126	126	Peak
4824	35.21	-38.79	74	56.39	31.22	6.54	58.94	100	0	Peak

Test Mode :	802.11b	Temperature :	25~26°C
Test Channel :	06	Relative Humidity :	50~51%
Test Engineer :	Jet Lui	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	94.25	-	-	96.1	27.07	4.68	33.6	123	334	Average
2437	100.69	-	-	102.54	27.07	4.68	33.6	123	334	Peak
4875	36.55	-37.45	74	57.55	31.31	6.56	58.87	100	0	Peak
7311	42.05	-31.95	74	56.13	36.14	8.24	58.46	100	0	Peak

Test Mode :	802.11b	Temperature :	25~26°C
Test Channel :	06	Relative Humidity :	50~51%
Test Engineer :	Jet Lui	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	93.4	-	-	95.32	27.02	4.68	33.62	104	93	Average
2437	99.78	-	-	101.7	27.02	4.68	33.62	104	93	Peak
4875	36.09	-37.91	74	57.09	31.31	6.56	58.87	100	0	Peak
7311	42.04	-31.96	74	56.12	36.14	8.24	58.46	100	0	Peak

Test Mode :	802.11b	Temperature :	25~26°C
Test Channel :	11	Relative Humidity :	50~51%
Test Engineer :	Jet Lui	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	93.39	-	-	95.17	27.11	4.7	33.59	121	333	Average
2462	99.41	-	-	101.19	27.11	4.7	33.59	121	333	Peak
4923	35.89	-38.11	74	56.71	31.39	6.59	58.8	100	0	Peak
7386	41.51	-32.49	74	55.46	36.35	8.31	58.61	100	0	Peak

Test Mode :	802.11b	Temperature :	25~26°C
Test Channel :	11	Relative Humidity :	50~51%
Test Engineer :	Jet Lui	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	93.07	-	-	94.85	27.11	4.7	33.59	100	92	Average
2462	99.33	-	-	101.11	27.11	4.7	33.59	100	92	Peak
4923	36.29	-37.71	74	57.11	31.39	6.59	58.8	100	0	Peak
7386	41.78	-32.22	74	55.73	36.35	8.31	58.61	100	0	Peak



Test Mode :	802.11g	Temperature :	25~26°C
Test Channel :	01	Relative Humidity :	50~51%
Test Engineer :	Jet Lui	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.35	27.19	-12.81	40	39.91	18.38	0.71	31.81	132	224	Peak
115.32	20.44	-23.06	43.5	39.26	11.8	1.16	31.78	-	-	Peak
173.1	21.28	-22.22	43.5	42.3	9.38	1.38	31.78	-	-	Peak
814.5	21.3	-24.7	46	27.84	22.45	2.86	31.85	-	-	Peak
886.6	23.39	-22.61	46	28.89	23	2.99	31.49	-	-	Peak
991.6	25	-29	54	27.7	24.79	3.22	30.71	-	-	Peak
2412	88.72	-	-	90.72	26.98	4.65	33.63	100	345	Average
2412	97.08	-	-	99.08	26.98	4.65	33.63	100	345	Peak
4824	35.27	-38.73	74	56.45	31.22	6.54	58.94	100	0	Peak



Test Mode :	802.11g	Temperature :	25~26°C
Test Channel :	01	Relative Humidity :	50~51%
Test Engineer :	Jet Lui	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.35	35.61	-4.39	40	48.33	18.38	0.71	31.81	107	219	Peak
34.05	33.63	-6.37	40	47.9	16.82	0.72	31.81	-	-	Peak
231.15	25.54	-20.46	46	45.51	10.22	1.58	31.77	-	-	Peak
727.7	20.71	-25.29	46	28.26	21.76	2.7	32.01	-	-	Peak
884.5	22.51	-23.49	46	28.03	23	2.98	31.5	-	-	Peak
960.1	25.37	-28.63	54	28.32	24.9	3.1	30.95	-	-	Peak
2412	88.3	-	-	90.3	26.98	4.65	33.63	126	93	Average
2412	97.05	-	-	99.05	26.98	4.65	33.63	126	93	Peak
4824	36.19	-37.81	74	57.37	31.22	6.54	58.94	100	0	Peak



Test Mode :	802.11g	Temperature :	25~26°C
Test Channel :	06	Relative Humidity :	50~51%
Test Engineer :	Jet Lui	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	90.16	-	-	92.01	27.07	4.68	33.6	123	334	Average
2437	100	-	-	101.85	27.07	4.68	33.6	123	334	Peak
4875	37.43	-36.57	74	58.43	31.31	6.56	58.87	100	0	Peak
7311	42	-32	74	56.08	36.14	8.24	58.46	100	0	Peak

Test Mode :	802.11g	Temperature :	25~26°C
Test Channel :	06	Relative Humidity :	50~51%
Test Engineer :	Jet Lui	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	89.74	-	-	91.66	27.02	4.68	33.62	103	92	Average
2437	99.19	-	-	101.11	27.02	4.68	33.62	103	92	Peak
4875	36.1	-37.9	74	57.1	31.31	6.56	58.87	100	0	Peak
7311	41.7	-32.3	74	55.78	36.14	8.24	58.46	100	0	Peak

Test Mode :	802.11g	Temperature :	25~26°C
Test Channel :	11	Relative Humidity :	50~51%
Test Engineer :	Jet Lui	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	89.43	-	-	91.21	27.11	4.7	33.59	100	334	Average
2462	99.2	-	-	100.98	27.11	4.7	33.59	100	334	Peak
4923	36.1	-37.9	74	56.92	31.39	6.59	58.8	100	0	Peak
7386	41.07	-32.93	74	55.02	36.35	8.31	58.61	100	0	Peak

Test Mode :	802.11g	Temperature :	25~26°C
Test Channel :	11	Relative Humidity :	50~51%
Test Engineer :	Jet Lui	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	90.37	-	-	92.15	27.11	4.7	33.59	103	44	Average
2462	97.71	-	-	99.49	27.11	4.7	33.59	103	44	Peak
4923	36.78	-37.22	74	57.6	31.39	6.59	58.8	100	0	Peak
7386	41.08	-32.92	74	55.03	36.35	8.31	58.61	100	0	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	25~26°C
Test Channel :	01	Relative Humidity :	50~51%
Test Engineer :	Jet Lui	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	86.69	-	-	88.69	26.98	4.65	33.63	100	347	Average
2412	96.24	-	-	98.24	26.98	4.65	33.63	100	347	Peak
4824	36.74	-37.26	74	57.92	31.22	6.54	58.94	100	0	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	25~26°C
Test Channel :	01	Relative Humidity :	50~51%
Test Engineer :	Jet Lui	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	85.47	-	-	87.47	26.98	4.65	33.63	127	125	Average
2412	95.15	-	-	97.15	26.98	4.65	33.63	127	125	Peak
4824	35.9	-38.1	74	57.08	31.22	6.54	58.94	100	0	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	25~26°C
Test Channel :	06	Relative Humidity :	50~51%
Test Engineer :	Jet Lui	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	87.71	-	-	89.56	27.07	4.68	33.6	123	333	Average
2437	96.45	-	-	98.3	27.07	4.68	33.6	123	333	Peak
4874	36.46	-37.54	74	57.46	31.31	6.56	58.87	100	0	Peak
7311	41.22	-32.78	74	55.3	36.14	8.24	58.46	100	0	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	25~26°C
Test Channel :	06	Relative Humidity :	50~51%
Test Engineer :	Jet Lui	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	86.74	-	-	88.66	27.02	4.68	33.62	104	95	Average
2437	95.62	-	-	97.54	27.02	4.68	33.62	104	95	Peak
4874	36.59	-37.41	74	57.59	31.31	6.56	58.87	100	0	Peak
7311	42.13	-31.87	74	56.21	36.14	8.24	58.46	100	0	Peak



Test Mode :	2.4GHz 802.11n HT20	Temperature :	25~26°C
Test Channel :	11	Relative Humidity :	50~51%
Test Engineer :	Jet Lui	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	86.58	-	-	88.36	27.11	4.7	33.59	100	335	Average
2462	96.37	-	-	98.15	27.11	4.7	33.59	100	335	Peak
4923	35.59	-38.41	74	56.41	31.39	6.59	58.8	100	0	Peak
7386	40.47	-33.53	74	54.42	36.35	8.31	58.61	100	0	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	25~26°C
Test Channel :	11	Relative Humidity :	50~51%
Test Engineer :	Jet Lui	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	85.89	-	-	87.67	27.11	4.7	33.59	100	125	Average
2462	94.73	-	-	96.51	27.11	4.7	33.59	100	125	Peak
4924	36.3	-37.7	74	57.11	31.39	6.6	58.8	100	0	Peak
7386	41.66	-32.34	74	55.61	36.35	8.31	58.61	100	0	Peak

Test Mode :	2.4GHz 802.11n HT40	Temperature :	25~26°C
Test Channel :	03	Relative Humidity :	50~51%
Test Engineer :	Jet Lui	Polarization :	Horizontal
Remark :	1. 2422 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2422	81.63	-	-	83.58	27.02	4.65	33.62	125	334	Average
2422	90.71	-	-	92.66	27.02	4.65	33.62	125	334	Peak
4845	35.8	-38.2	74	56.92	31.25	6.55	58.92	100	0	Peak
7266	42.29	-31.71	74	56.43	36.06	8.2	58.4	100	0	Peak

Test Mode :	2.4GHz 802.11n HT40	Temperature :	25~26°C
Test Channel :	03	Relative Humidity :	50~51%
Test Engineer :	Jet Lui	Polarization :	Vertical
Remark :	1. 2422 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2422	79.8	-	-	81.75	27.02	4.65	33.62	127	126	Average
2422	88.64	-	-	90.59	27.02	4.65	33.62	127	126	Peak
4845	37.86	-36.14	74	58.98	31.25	6.55	58.92	100	0	Peak
7266	40.54	-33.46	74	54.68	36.06	8.2	58.4	100	0	Peak

Test Mode :	2.4GHz 802.11n HT40	Temperature :	25~26°C
Test Channel :	06	Relative Humidity :	50~51%
Test Engineer :	Jet Lui	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	81.69	-	-	83.61	27.02	4.68	33.62	122	334	Average
2437	90.77	-	-	92.69	27.02	4.68	33.62	122	334	Peak
4875	36.56	-37.44	74	57.56	31.31	6.56	58.87	100	0	Peak
7311	41.93	-32.07	74	56.01	36.14	8.24	58.46	100	0	Peak

Test Mode :	2.4GHz 802.11n HT40	Temperature :	25~26°C
Test Channel :	06	Relative Humidity :	50~51%
Test Engineer :	Jet Lui	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	80.48	-	-	82.4	27.02	4.68	33.62	100	124	Average
2437	89.48	-	-	91.4	27.02	4.68	33.62	100	124	Peak
4875	37.38	-36.62	74	58.38	31.31	6.56	58.87	100	0	Peak
7311	42.42	-31.58	74	56.5	36.14	8.24	58.46	100	0	Peak

Test Mode :	2.4GHz 802.11n HT40	Temperature :	25~26°C
Test Channel :	09	Relative Humidity :	50~51%
Test Engineer :	Jet Lui	Polarization :	Horizontal
Remark :	1. 2452 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2452	81.41	-	-	83.26	27.07	4.68	33.6	100	334	Average
2452	90.88	-	-	92.73	27.07	4.68	33.6	100	334	Peak
4905	36.27	-37.73	74	57.14	31.36	6.59	58.82	100	0	Peak
7356	42.45	-31.55	74	56.44	36.27	8.29	58.55	100	0	Peak

Test Mode :	2.4GHz 802.11n HT40	Temperature :	25~26°C
Test Channel :	09	Relative Humidity :	50~51%
Test Engineer :	Jet Lui	Polarization :	Vertical
Remark :	1. 2452 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2452	80.31	-	-	82.16	27.07	4.68	33.6	102	93	Average
2452	88.42	-	-	90.27	27.07	4.68	33.6	102	93	Peak
4905	36.64	-37.36	74	57.51	31.36	6.59	58.82	100	0	Peak
7356	42.16	-31.84	74	56.15	36.27	8.29	58.55	100	0	Peak

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


3.6.4 Test Setup

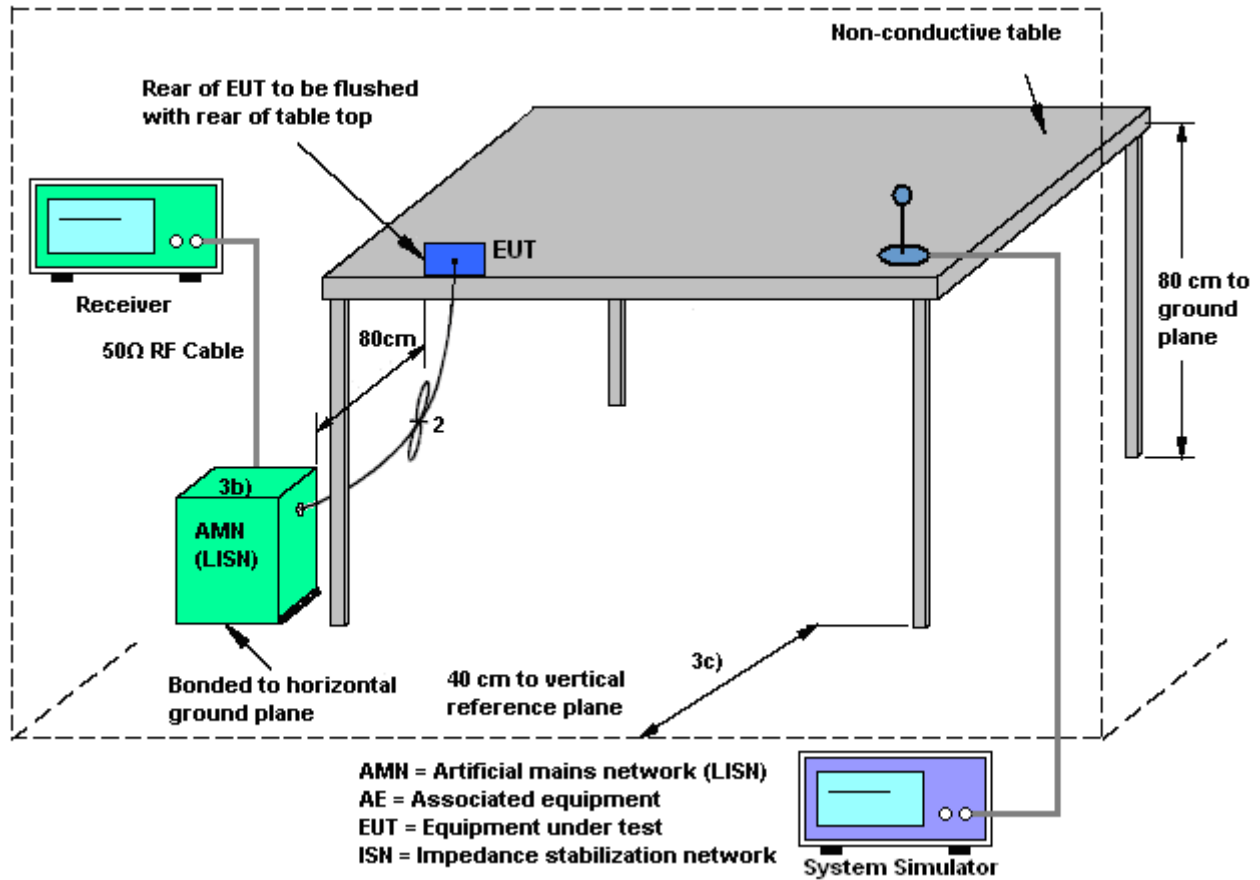



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24℃
Test Engineer :	Eligah Wang	Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + NFC Tx + Earphone + USB Cable (Charging from Adapter)		

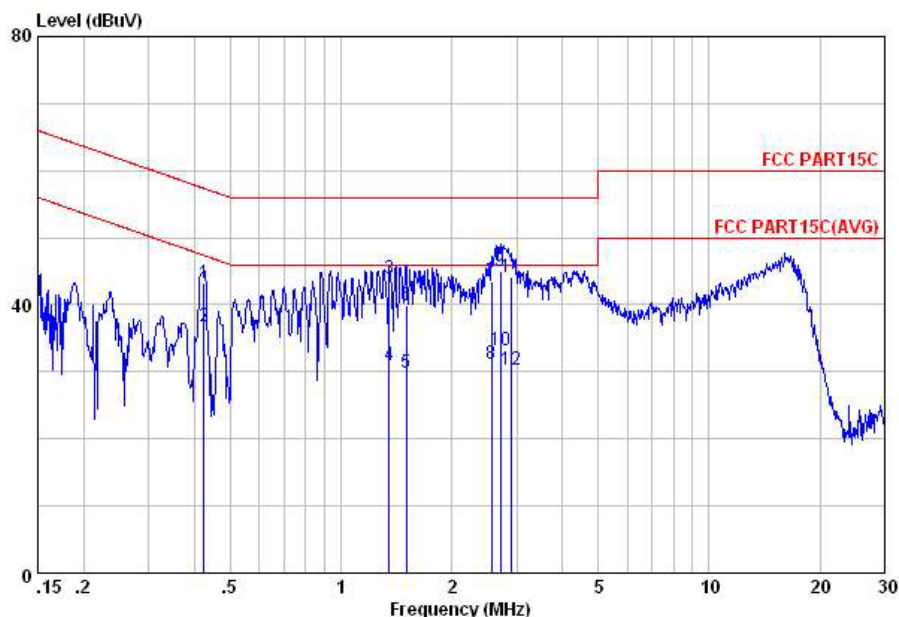


Site : C001-KS

Condition: FCC PART15C LISN-L20130306 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.42	43.16	-14.21	57.37	32.60	0.28	10.28	QP
2	0.42	36.86	-10.51	47.37	26.30	0.28	10.28	Average
3	1.35	43.88	-12.12	56.00	33.60	0.10	10.18	QP
4	1.35	30.88	-15.12	46.00	20.60	0.10	10.18	Average
5	1.50	29.89	-16.11	46.00	19.60	0.10	10.19	Average
6	1.50	39.89	-16.11	56.00	29.60	0.10	10.19	QP
7	2.57	43.52	-12.48	56.00	33.20	0.12	10.20	QP
8	2.57	31.22	-14.78	46.00	20.90	0.12	10.20	Average
9	2.71	44.93	-11.07	56.00	34.60	0.12	10.21	QP
10	2.71	33.23	-12.77	46.00	22.90	0.12	10.21	Average
11	2.90	44.15	-11.85	56.00	33.80	0.13	10.22	QP
12	2.90	30.25	-15.75	46.00	19.90	0.13	10.22	Average

Test Mode :	Mode 1	Temperature :	22~24℃
Test Engineer :	Eligah Wang	Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + NFC Tx + Earphone + USB Cable (Charging from Adapter)		

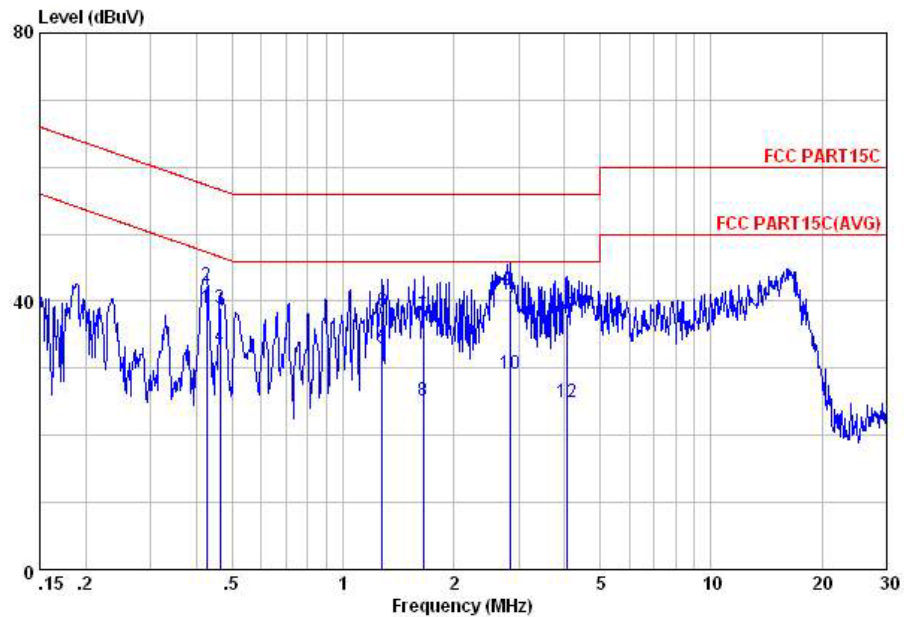

Site : C001-KS
Condition: FCC PART15C LISN-N20130306 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.43	38.94	-8.39	47.33	28.29	0.37	10.28	Average
2	0.43	42.24	-15.09	57.33	31.59	0.37	10.28	QP
3	0.46	38.90	-17.73	56.63	28.30	0.33	10.27	QP
4	0.46	33.20	-13.43	46.63	22.60	0.33	10.27	Average
5	1.28	32.88	-13.12	46.00	22.60	0.10	10.18	Average
6	1.28	38.58	-17.42	56.00	28.30	0.10	10.18	QP
7	1.65	37.89	-18.11	56.00	27.60	0.10	10.19	QP
8	1.65	25.09	-20.91	46.00	14.80	0.10	10.19	Average
9	2.84	41.74	-14.26	56.00	31.39	0.13	10.22	QP
10	2.84	29.24	-16.76	46.00	18.89	0.13	10.22	Average
11	4.07	38.03	-17.97	56.00	27.60	0.19	10.24	QP
12	4.07	25.03	-20.97	46.00	14.60	0.19	10.24	Average



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 09, 2014	Jul. 29, 2014	Jun. 08, 2015	Conducted (TH02-HY)
Power Meter	Agilent	E4416A	GB41292344	300MHz~40GHz	Jan. 28, 2014	Jul. 29, 2014	Jan. 27, 2015	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US40441548	300MHz~40GHz	Jan. 28, 2014	Jul. 29, 2014	Jan. 27, 2015	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 09, 2014	Jul. 19, 2014~ Jul. 20, 2014	Jun. 08, 2015	Radiation (03CH05-HY)
Bilog Antenna	Schaffner	CBL6111C	2725	30MHz~1GHz	Oct. 10, 2013	Jul. 19, 2014~ Jul. 20, 2014	Oct. 09, 2014	Radiation (03CH05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100330	9K~30M	Nov. 15, 2012	Jul. 19, 2014~ Jul. 20, 2014	Nov. 14, 2014	Radiation (03CH05-HY)
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1241	1GHz~18GHz	Apr. 16, 2014	Jul. 19, 2014~ Jul. 20, 2014	Apr. 15, 2015	Radiation (03CH05-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	18GHz~40GHz	Oct. 03, 2013	Jul. 19, 2014~ Jul. 20, 2014	Oct. 02, 2014	Radiation (03CH05-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	100kHz~18GHz	Jul. 07, 2014	Jul. 19, 2014~ Jul. 20, 2014	Jul. 06, 2015	Radiation (03CH05-HY)
Preamplifier	Miteq	TTA0204	1872107	18GHz~40GHz	May 23, 2014	Jul. 19, 2014~ Jul. 20, 2014	May 22, 2015	Radiation (03CH05-HY)
Turn Table	HD	HD100	420/611	0 - 360 degree	N/A	Jul. 19, 2014~ Jul. 20, 2014	N/A	Radiation (03CH05-HY)
Antenna Mast	HD	HD100	240/666	1 m - 4 m	N/A	Jul. 19, 2014~ Jul. 20, 2014	N/A	Radiation (03CH05-HY)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 04, 2014	Jul. 16, 2014	May 03, 2015	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Dec. 10, 2013	Jul. 16, 2014	Dec. 09, 2014	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Dec. 10, 2013	Jul. 16, 2014	Dec. 09, 2014	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Nov. 12, 2013	Jul. 16, 2014	Nov. 11, 2014	Conduction (CO01-KS)

※ Calibration Interval of Loop Antenna is two years.



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5
---	-----