



FCC RF Test Report

APPLICANT : Acer Incorporated
EQUIPMENT : Smart HandHeld
(GSM900/DCS1800/WCDMA/LTE/BT/WiFi)
BRAND NAME : Acer
MODEL NAME : T02
MARKETING NAME : Liquid Z530
FCC ID : HLZDMZ530TW
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Jul. 14, 2015 and testing was completed on Oct. 24, 2015. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : HLZDMZ530TW

Page Number : 1 of 23

Report Issued Date : Nov. 04, 2015

Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.0



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification subjective to this standard	6
1.5 Modification of EUT	6
1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	7
1.7 Testing Location	7
1.8 Applicable Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System	10
2.3 Support Unit used in test configuration	10
2.4 Measurement Results Explanation Example	10
3 CONDUCTED TEST RESULT	11
3.1 Measuring Instruments.....	11
3.2 Test Setup	11
3.3 Test Result of Conducted Test.....	11
3.4 Conducted Output Power	12
3.5 Peak-to-Average Ratio	13
3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	14
3.7 Conducted Band Edge	15
3.8 Conducted Spurious Emission	16
3.9 Frequency Stability	17
4 RADIATED TEST ITEMS	18
4.1 Measuring Instruments.....	18
4.2 Test Setup	18
4.3 Test Result of Radiated Test.....	18
4.4 Effective Radiated Power and Effective Isotropic Radiated Power Measurement	19
4.5 Field Strength of Spurious Radiation Measurement	21
5 LIST OF MEASURING EQUIPMENT	22
6 UNCERTAINTY OF EVALUATION	23
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG571428	Rev. 01	Initial issue of report	Nov. 04, 2015



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.6	§2.1049 §22.917(b) §24.238(b)	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a)	Band Edge Measurement	$< 43 + 10 \log_{10}(P[\text{Watts}])$	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a)	Conducted Emission	$< 43 + 10 \log_{10}(P[\text{Watts}])$	PASS	-
3.9	§2.1055 §22.355	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§2.1055 §24.235		Within Authorized Band		
4.4	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
4.5	§2.1053 §22.917(a) §24.238(a)	Field Strength of Spurious Radiation	$< 43 + 10 \log_{10}(P[\text{Watts}])$	PASS	Under limit 15.93 dB at 3819.000 MHz



1 General Description

1.1 Applicant

Acer Incorporated

8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 22181, Taiwan (R.O.C)

1.2 Manufacturer

Compal Electronics, INC.

No. 385, Yangguang St. Neihu District, Taipei City 11491, Taiwan (R.O.C)

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart HandHeld (GSM900/DCS1800/WCDMA/LTE/BT/WiFi)
Brand Name	Acer
Model Name	T02
FCC ID	HLZDMZ530TW
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/LTE WLAN 11b/g/n HT20/HT40 Bluetooth v4.0 EDR/LE
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx Frequency	GSM/GPRS/EDGE: 850: 824.2 MHz ~ 848.8 MHz 1900: 1850.2 MHz ~ 1909.8MHz WCDMA: Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz
Rx Frequency	GSM/GPRS/EDGE: 850: 869.2 MHz ~ 893.8 MHz 1900: 1930.2 MHz ~ 1989.8 MHz WCDMA: Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz
Maximum Output Power to Antenna	GSM/GPRS/EDGE: 850: 32.84 dBm 1900: 29.18 dBm WCDMA: Band V: 22.76 dBm Band II: 22.65 dBm
Antenna Type	PIFA Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: QPSK (Uplink) HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	GSM850 GPRS class 8	GMSK	0.6446	0.0167 ppm	245KGXW
Part 22	GSM850 EDGE class 8	8PSK	0.2087	0.0275 ppm	254KG7W
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.0662	0.0179 ppm	4M21F9W
Part 24	GSM1900 GPRS class 8	GMSK	0.7542	0.0186 ppm	247KGXW
Part 24	GSM1900 EDGE class 8	8PSK	0.2028	0.0186 ppm	252KG7W
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.1286	0.0069 ppm	4M21F9W

1.7 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	TH03-HY

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	03CH11-HY



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 19000 MHz for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GPRS class 8 Link	■ GPRS class 8 Link
	■ EDGE class 8 Link	■ EDGE class 8 Link
GSM 1900	■ GPRS class 8 Link	■ GPRS class 8 Link
	■ EDGE class 8 Link	■ EDGE class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

2.2 Connection Diagram of Test System

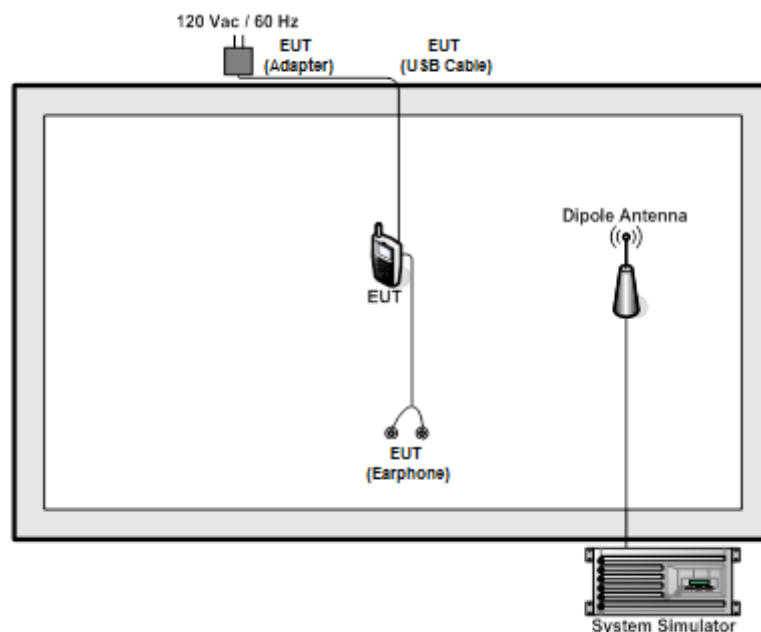

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$


3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

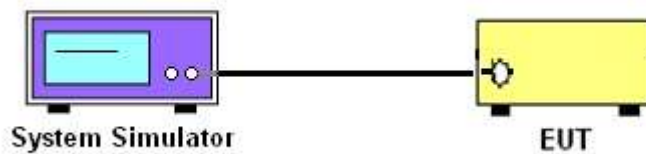

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

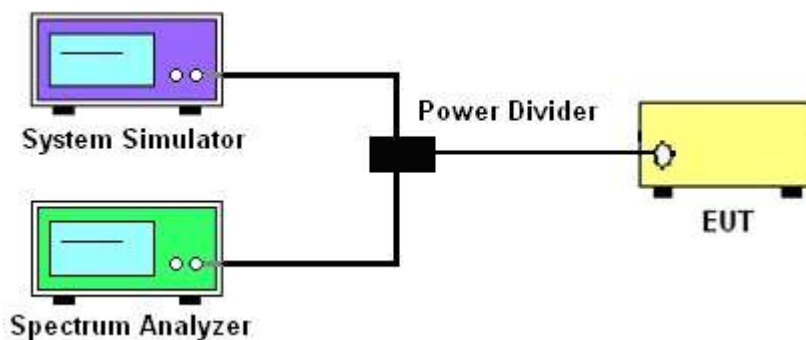

3.2.3 Frequency Stability

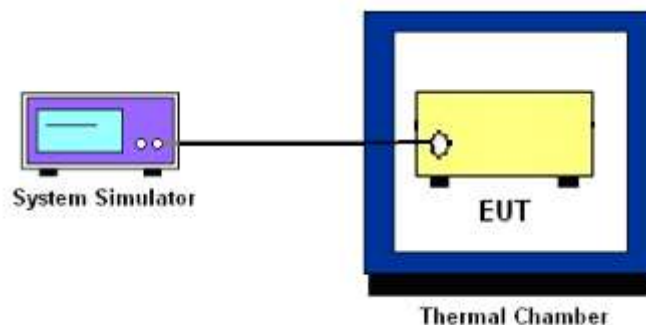

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power

3.4.1 Description of the Conducted Output Power

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. Set EUT to transmit at maximum output power.
4. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
Record the maximum PAPR level associated with a probability of 0.1%.



3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$



3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm.



3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz



4.2.2 For radiated test above 1GHz

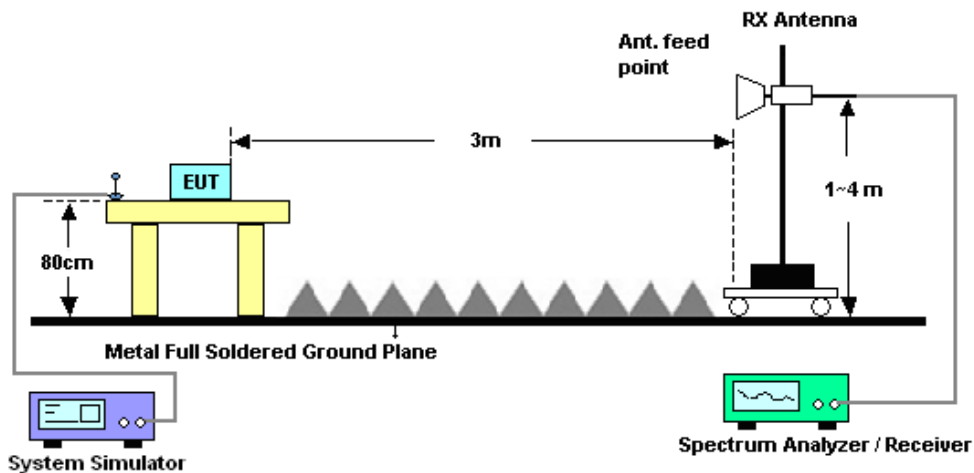

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

4.4.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band).

4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-C-2004 Section 2.2.17.
2. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$. Take the record of the output power at substitution antenna.



	GSM/GPRS/EDGE	WCDMA/HSPA
SPAN	500kHz	10MHz
RBW	10kHz	100kHz
VBW	30kHz	300kHz
Detector	RMS	RMS
Trace	Average	Average
Average Type	Power	Power
Sweep Count	100	100



4.5 Field Strength of Spurious Radiation Measurement

4.5.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.5.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI / TIA-603-C-2004 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12. $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Jun. 24, 2015	Oct. 23, 2015~ Oct. 24, 2015	Jun. 23, 2016	Conducted (TH03-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL883644	Voltage:0~20V; Current:0~5A	Dec. 01, 2014	Oct. 23, 2015~ Oct. 24, 2015	Nov. 30, 2015	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30~70°	Dec. 01, 2014	Oct. 23, 2015~ Oct. 24, 2015	Nov. 30, 2015	Conducted (TH03-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 24, 2014	Oct. 22, 2015~ Oct. 23, 2015	Nov. 23, 2015	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D	35419	30MHz~1GHz	Mar. 30, 2015	Oct. 22, 2015~ Oct. 23, 2015	Mar. 29, 2016	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Oct. 08, 2015	Oct. 22, 2015~ Oct. 23, 2015	Oct. 07, 2016	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1325	1GHz ~ 18GHz	Sep. 30, 2015	Oct. 22, 2015~ Oct. 23, 2015	Sep. 29, 2016	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA91702 51	18GHz- 40GHz	Oct. 12, 2015	Oct. 22, 2015~ Oct. 23, 2015	Oct. 11, 2016	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY5327008 0	1GHz~26.5GHz	Nov. 20, 2014	Oct. 22, 2015~ Oct. 23, 2015	Nov. 19, 2015	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY5420048 6	10Hz ~ 44GHZ	Sep. 24, 2015	Oct. 22, 2015~ Oct. 23, 2015	Sep. 23, 2016	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-450 0-B	N/A	1~4m	N/A	Oct. 22, 2015~ Oct. 23, 2015	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0-360 degree	N/A	Oct. 22, 2015~ Oct. 23, 2015	N/A	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY5420048 6	10Hz ~ 44GHZ	Sep. 22, 2015	Oct. 22, 2015~ Oct. 23, 2015	Sep. 23, 2016	Radiation (03CH11-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	May 22, 2015	Oct. 22, 2015~ Oct. 23, 2015	May 21, 2016	Radiation (03CH11-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.90
--	------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	32.76	32.80	32.81	29.15	28.91	28.81
GPRS class 8	32.78	32.82	32.84	29.18	28.93	28.83
GPRS class 10	32.30	32.34	32.39	28.57	28.29	28.16
GPRS class 11	30.81	30.80	30.84	26.88	26.60	26.44
GPRS class 12	29.62	29.61	29.65	25.69	25.40	25.24
EGPRS class 8	27.03	27.26	27.25	24.65	24.59	24.38
EGPRS class 10	25.87	26.08	26.08	23.53	23.36	23.25
EGPRS class 11	23.88	24.11	24.04	21.44	21.23	21.14
EGPRS class 12	22.83	23.08	23.01	20.13	19.98	19.93

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
RMC 12.2K	22.74	22.76	22.64	22.64	22.65	22.54
HSDPA Subtest-1	21.67	21.75	21.66	21.55	21.56	21.54
HSDPA Subtest-2	21.70	21.79	21.65	21.56	21.57	21.56
HSDPA Subtest-3	21.22	21.33	21.19	21.08	21.09	21.09
HSDPA Subtest-4	21.20	21.31	21.16	21.06	21.08	21.07
HSUPA Subtest-1	19.71	19.75	19.62	19.64	19.65	19.62
HSUPA Subtest-2	19.26	19.29	19.13	19.06	19.56	19.04
HSUPA Subtest-3	20.75	20.77	20.64	20.52	20.54	20.52
HSUPA Subtest-4	19.29	19.28	19.12	19.19	19.13	19.01
HSUPA Subtest-5	21.56	21.74	21.55	21.50	21.51	21.50



Appendix B. Test Results of Radiated Test

ERP/EIRP

Channel	Mode	Horizontal		Vertical	
		ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	GSM850 GPRS class 8	18.58	0.0721	28.09	0.6446
Middle		18.66	0.0734	28.04	0.6375
Highest		18.35	0.0683	27.55	0.5691
Lowest	GSM850 EDGE class 8	12.87	0.0194	22.38	0.1729
Middle		13.79	0.0239	22.89	0.1943
Highest		13.75	0.0237	23.20	0.2087
Lowest	WCDMA Band V RMC 12.2Kbps	8.30	0.0068	17.85	0.0609
Middle		8.32	0.0068	18.21	0.0662
Highest		8.35	0.0068	17.95	0.0624
Limit	ERP < 7W	Result		PASS	



Channel	Mode	Horizontal		Vertical	
		EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	GSM1900 GPRS class 8	27.20	0.5249	28.77	0.7542
Middle		25.28	0.3373	26.92	0.4924
Highest		25.65	0.3673	27.59	0.5737
Lowest	GSM1900 EDGE class 8	19.19	0.0830	20.76	0.1191
Middle		20.15	0.1034	21.94	0.1562
Highest		21.33	0.1360	23.07	0.2028
Lowest	WCDMA Band II RMC 12.2Kbps	19.05	0.0803	20.38	0.1092
Middle		19.38	0.0867	21.09	0.1286
Highest		19.33	0.0857	21.09	0.1286
Limit	EIRP < 2W	Result		PASS	



Radiated Spurious Emission

GSM850 (GPRS class 8)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1649	-61.65	-13	-48.65	-66.63	-63.4	0.98	4.88	H
	2474	-35.01	-13	-22.01	-44.52	-36.9	1.28	5.32	H
	3298	-55.58	-13	-42.58	-68.29	-59	1.54	7.11	H
	4123	-56.86	-13	-43.86	-72.94	-61.5	1.83	8.62	H
	4948	-54.96	-13	-41.96	-73.84	-60.1	2.31	9.60	H
	5772	-57.42	-13	-44.42	-78.22	-62.3	2.78	9.81	H
	6597	-56.35	-13	-43.35	-78.98	-61.8	2.72	10.32	H
	7422	-52.46	-13	-39.46	-78.07	-59.5	2.45	11.64	H
	8247	-45.57	-13	-32.57	-71.71	-53.4	2.32	12.30	H
	1649	-61.45	-13	-48.45	-65	-63.2	0.98	4.88	V
	2474	-42.91	-13	-29.91	-54.01	-44.8	1.28	5.32	V
	3298	-60.48	-13	-47.48	-72.32	-63.9	1.54	7.11	V
	4123	-50.96	-13	-37.96	-66.75	-55.6	1.83	8.62	V
	4948	-58.76	-13	-45.76	-77.48	-63.9	2.31	9.60	V
	5772	-58.62	-13	-45.62	-78.45	-63.5	2.78	9.81	V
	6597	-54.05	-13	-41.05	-77.15	-59.5	2.72	10.32	V
	7422	-52.76	-13	-39.76	-77.01	-59.8	2.45	11.64	V
	8247	-43.67	-13	-30.67	-68.8	-51.5	2.32	12.30	V
Middle	1672	-59.02	-13	-46.02	-64.04	-60.7	0.99	4.82	H
	2509	-37.54	-13	-24.54	-47.06	-39.5	1.29	5.41	H
	3345	-55.99	-13	-42.99	-68.3	-59.6	1.56	7.32	H
	4182	-58.58	-13	-45.58	-74.61	-63.2	1.87	8.64	H
	5018	-56.20	-13	-43.20	-75.35	-61.4	2.35	9.70	H
	5854	-58.24	-13	-45.24	-79.19	-63.1	2.83	9.84	H
	6691	-56.11	-13	-43.11	-78.92	-61.7	2.69	10.43	H
	7527	-52.75	-13	-39.75	-78.23	-60	2.42	11.82	H
	8364	-44.90	-13	-31.90	-71.34	-52.8	2.35	12.39	H
	1672	-60.92	-13	-47.92	-64.41	-62.6	0.99	4.82	V
	2512	-43.03	-13	-30.03	-53.52	-45	1.29	5.41	V
	3344	-58.89	-13	-45.89	-70.78	-62.5	1.56	7.31	V
	4184	-51.48	-13	-38.48	-68.05	-56.1	1.87	8.64	V
	5018	-59.10	-13	-46.10	-77.02	-64.3	2.35	9.70	V
	5854	-58.14	-13	-45.14	-78.42	-63	2.83	9.84	V
	6691	-54.91	-13	-41.91	-77.92	-60.5	2.69	10.43	V
	7527	-51.95	-13	-38.95	-76.36	-59.2	2.42	11.82	V
	8364	-48.20	-13	-35.20	-73.38	-56.1	2.35	12.39	V



GSM850 (GPRS class 8)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Highest	1696	-58.40	-13	-45.40	-62.67	-60	1.00	4.75	H
	2544	-43.22	-13	-30.22	-53.19	-45.2	1.30	5.44	H
	3393	-56.39	-13	-43.39	-68.89	-60.2	1.57	7.53	H
	4241	-60.60	-13	-47.60	-77.05	-65.2	1.90	8.65	H
	5089	-58.34	-13	-45.34	-77.96	-63.5	2.39	9.70	H
	5938	-58.25	-13	-45.25	-79.56	-63.1	2.88	9.88	H
	6786	-55.87	-13	-42.87	-79.1	-61.6	2.66	10.54	H
	7634	-53.16	-13	-40.16	-78.28	-60.5	2.39	11.88	H
	8483	-49.14	-13	-36.14	-75.53	-57.1	2.37	12.49	H
	1696	-69.90	-13	-56.90	-74.05	-71.5	1.00	4.75	V
	2544	-64.12	-13	-51.12	-74.82	-66.1	1.30	5.44	V
	3393	-64.09	-13	-51.09	-76.05	-67.9	1.57	7.53	V
	4241	-61.00	-13	-48.00	-77.26	-65.6	1.90	8.65	V
	5089	-59.94	-13	-46.94	-77.92	-65.1	2.39	9.70	V
	5938	-58.65	-13	-45.65	-79.43	-63.5	2.88	9.88	V
	6786	-56.27	-13	-43.27	-79.19	-62	2.66	10.54	V
	7634	-54.26	-13	-41.26	-78.31	-61.6	2.39	11.88	V
	8483	-53.34	-13	-40.34	-78.62	-61.3	2.37	12.49	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM850 (EDGE class 8)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1649	-48.75	-13	-35.75	-53.59	-50.5	0.98	4.88	H
	2474	-48.61	-13	-35.61	-58.25	-50.5	1.28	5.32	H
	3298	-63.08	-13	-50.08	-75.85	-66.5	1.54	7.11	H
	1649	-64.35	-13	-51.35	-68.05	-66.1	0.98	4.88	V
	2474	-58.01	-13	-45.01	-68.41	-59.9	1.28	5.32	V
	3298	-63.68	-13	-50.68	-75.5	-67.1	1.54	7.11	V
Middle	1672	-67.32	-13	-54.32	-72.07	-69	0.99	4.82	H
	2509	-50.14	-13	-37.14	-60.01	-52.1	1.29	5.41	H
	3345	-63.59	-13	-50.59	-75.89	-67.2	1.56	7.32	H
	1672	-64.82	-13	-51.82	-67.95	-66.5	0.99	4.82	V
	2512	-58.53	-13	-45.53	-68.93	-60.5	1.29	5.41	V
	3344	-63.89	-13	-50.89	-75.71	-67.5	1.56	7.31	V
Highest	1696	-62.10	-13	-49.10	-66.84	-63.7	1.00	4.75	H
	2544	-43.22	-13	-30.22	-52.94	-45.2	1.30	5.44	H
	3393	-62.89	-13	-49.89	-75.45	-66.7	1.57	7.53	H
	7640	-47.15	-13	-34.15	-72.48	-54.5	2.38	11.88	H
	1696	-58.90	-13	-45.90	-63.4	-60.5	1.00	4.75	H
	2544	-52.97	-13	-39.97	-63.36	-57.1	1.30	5.44	V
	3393	-64.14	-13	-51.14	-75.92	-70.1	1.57	7.53	V
	4248	-59.35	-13	-46.35	-75.46	-66.1	1.90	8.65	V
	6792	-53.01	-13	-40.01	76.5	-60.9	2.66	10.55	V
	7640	-49.00	-13	-36.00	73.08	-58.5	2.38	11.88	V
	8488	-50.38	-13	-37.38	76.01	-60.5	2.37	12.49	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (GPRS class 8)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3700	-39.27	-13	-26.27	-53.33	-45.84	1.67	8.24	H
	5548	-41.61	-13	-28.61	-60.8	-48.68	2.65	9.72	H
	7403	-40.02	-13	-27.02	-64.54	-49.17	2.46	11.61	H
	9251	-48.10	-13	-35.10	-75.92	-58.16	2.54	12.60	H
	12954	-36.54	-13	-23.54	-73.09	-46.57	2.92	12.94	H
	3700	-41.42	-13	-28.42	-55.39	-47.99	1.67	8.24	V
	5548	-39.17	-13	-26.17	-56.82	-46.24	2.65	9.72	V
	7403	-39.34	-13	-26.34	-62.66	-48.49	2.46	11.61	V
	9251	-35.40	-13	-22.40	-70.63	-45.46	2.54	12.60	V
	12954	-42.61	-13	-29.61	-75.27	-52.64	2.92	12.94	V
Middle	3763	-37.57	-13	-24.57	-52.5	-44.2	1.69	8.32	H
	5639	-39.05	-13	-26.05	-58.74	-46.1	2.71	9.76	H
	7522	-38.81	-13	-25.81	-63.69	-48.2	2.42	11.81	H
	9398	-48.43	-13	-35.43	-77.09	-58.4	2.57	12.54	H
	11283	-49.40	-13	-36.40	-79	-59.1	2.68	12.39	H
	13163	-30.94	-13	-17.94	-68.69	-41.2	2.97	13.23	H
	3763	-35.57	-13	-22.57	-49.96	-42.2	1.69	8.32	V
	5639	-44.55	-13	-31.55	-63.2	-51.6	2.71	9.76	V
	7522	-43.51	-13	-30.51	-67.55	-52.9	2.42	11.81	V
	9398	-50.03	-13	-37.03	-75.4	-60	2.57	12.54	V
	11280	-50.40	-13	-37.40	-79.11	-60.1	2.68	12.39	V
	13160	-41.95	-13	-28.95	-76.37	-52.2	2.97	13.22	V
	15044	-39.65	-13	-26.65	-75.75	-49.7	3.62	13.66	V
Highest	3819	-32.45	-13	-19.45	-46.91	-39.13	1.70	8.38	H
	5730	-40.48	-13	-27.48	-59.65	-47.51	2.76	9.79	H
	7641	-41.89	-13	-28.89	-66.09	-51.39	2.38	11.88	H
	9552	-47.77	-13	-34.77	-76.77	-57.64	2.60	12.47	H
	11463	-46.90	-13	-33.90	-76.86	-56.53	2.68	12.31	H
	13372	-33.93	-13	-20.93	-71.11	-44.43	3.02	13.52	H
	15282	-37.09	-13	-24.09	-74.15	-47.37	3.72	13.99	H
	17191	-34.89	-13	-21.89	-76.27	-44.37	3.85	13.33	H
	3819	-28.93	-13	-15.93	-42.74	-35.61	1.70	8.38	V
	5730	-40.68	-13	-27.68	-58.69	-47.71	2.76	9.79	V
	7641	-43.47	-13	-30.47	-66.97	-52.97	2.38	11.88	V
	9552	-46.66	-13	-33.66	-72.38	-56.53	2.60	12.47	V
	11463	-49.48	-13	-36.48	-78.33	-59.11	2.68	12.31	V
	13372	-33.43	-13	-20.43	-68.32	-43.93	3.02	13.52	V
	15282	-37.85	-13	-24.85	-73.36	-48.13	3.72	13.99	V
	17191	-34.17	-13	-21.17	-75.63	-43.65	3.85	13.33	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (EDGE class 8)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3700	-49.09	-13	-36.09	-63.15	-55.66	1.67	8.24	H
	5548	-57.50	-13	-44.50	-76.69	-64.57	2.65	9.72	H
	7403	-53.23	-13	-40.23	-77.85	-62.38	2.46	11.61	H
	3700	-50.06	-13	-37.06	-64.03	-56.63	1.67	8.24	V
	5548	-58.94	-13	-45.94	-76.59	-66.01	2.65	9.72	V
	7403	-52.88	-13	-39.88	-76.29	-62.03	2.46	11.61	V
Middle	3763	-49.56	-13	-36.56	-63.79	-56.19	1.69	8.32	H
	5639	-56.69	-13	-43.69	-75.64	-63.74	2.71	9.76	H
	7522	-52.19	-13	-39.19	-76.57	-61.58	2.42	11.81	H
	3763	-47.94	-13	-34.94	-61.84	-54.57	1.69	8.32	V
	5639	-58.88	-13	-45.88	-76.33	-65.93	2.71	9.76	V
	7522	-53.77	-13	-40.77	-77.15	-63.16	2.42	11.81	V
Highest	3819	-50.82	-13	-37.82	-65.28	-57.5	1.70	8.38	H
	5730	-58.30	-13	-45.30	-77.48	-65.33	2.76	9.79	H
	7641	-52.91	-13	-39.91	-77.11	-62.41	2.38	11.88	H
	3819	-46.09	-13	-33.09	-59.9	-52.77	1.70	8.38	V
	5730	-59.20	-13	-46.20	-77.21	-66.23	2.76	9.79	V
	7641	-53.30	-13	-40.30	-76.8	-62.8	2.38	11.88	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band V(RMC 12.2Kbps)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1656	-69.49	-13	-56.49	-73.87	-71.22	0.98	4.86	H
	2480	-63.67	-13	-50.67	-72.96	-65.58	1.28	5.34	H
	3304	-63.94	-13	-50.94	-75.77	-67.38	1.54	7.14	H
	1656	-68.02	-13	-55.02	-70.89	-69.75	0.98	4.86	V
	2480	-63.06	-13	-50.06	-73.33	-64.97	1.28	5.34	V
	3304	-65.00	-13	-52.00	-75.92	-68.44	1.54	7.14	V
Middle	1672	-68.50	-13	-55.50	-75.98	-70.18	0.99	4.82	H
	2512	-66.01	-13	-53.01	-75.564	-67.98	1.29	5.41	H
	3344	-64.20	-13	-51.20	-72.77	-67.81	1.56	7.31	H
	1672	-68.57	-13	-55.57	-71.27	-70.25	0.99	4.82	V
	2512	-65.01	-13	-52.01	-74.64	-66.98	1.29	5.41	V
	3344	-64.91	-13	-51.91	-75.91	-68.52	1.56	7.31	V
Highest	1696	-68.02	-13	-55.02	-72.33	-69.62	1.00	4.75	H
	2536	-65.98	-13	-52.98	-75.21	-67.96	1.30	5.43	H
	3384	-64.19	-13	-51.19	-76.2	-67.96	1.57	7.49	H
	1696	-67.47	-13	-54.47	-70.84	-69.07	1.00	4.75	V
	2536	-65.43	-13	-52.43	-75.17	-67.41	1.30	5.43	V
	3384	-64.48	-13	-51.48	-75.91	-68.25	1.57	7.49	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band II(RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3707	-47.28	-13	-34.28	-61.35	-53.86	1.67	8.25	H
	5555	-55.82	-13	-42.82	-75.13	-62.89	2.66	9.72	H
	7410	-53.76	-13	-40.76	-78.39	-62.92	2.46	11.62	H
	3707	-46.27	-13	-33.27	-60.25	-52.85	1.67	8.25	V
	5555	-54.35	-13	-41.35	-72.01	-61.42	2.66	9.72	V
	7410	-55.42	-13	-42.42	-78.84	-64.58	2.46	11.62	V
Middle	3763	-56.56	-13	-43.56	-70.8	-63.19	1.69	8.32	H
	5639	-55.70	-13	-42.70	-74.65	-62.75	2.71	9.76	H
	7522	-53.00	-13	-40.00	-77.38	-62.39	2.42	11.81	H
	3763	-55.75	-13	-42.75	-69.65	-62.38	1.69	8.32	V
	5639	-56.39	-13	-43.39	-73.84	-63.44	2.71	9.76	V
	7522	-54.79	-13	-41.79	-78.27	-64.18	2.42	11.81	V
Highest	3812	-56.77	-13	-43.77	-71.17	-63.44	1.70	8.37	H
	5723	-55.36	-13	-42.36	-74.55	-62.4	2.75	9.79	H
	7627	-54.54	-13	-41.54	-78.72	-64.03	2.39	11.88	H
	3812	-55.15	-13	-42.15	-68.87	-61.82	1.70	8.37	V
	5723	-56.25	-13	-43.25	-74.18	-63.29	2.75	9.79	V
	7627	-55.26	-13	-42.26	-78.72	-64.75	2.39	11.88	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



Appendix C. Test Setup Photographs