



# FCC RF Test Report

**APPLICANT** : Acer Incorporated  
**EQUIPMENT** : Smart HandHeld  
**BRAND NAME** : Acer  
**MODEL NAME** : S510  
**MARKETING NAME** : Liquid S1  
**FCC ID** : HLZEMS510  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The product was received on Oct. 28, 2013 and testing was completed on Nov. 06, 2013. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown to be compliant with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL INC.**  
No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



## TABLE OF CONTENTS

<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1 GENERAL DESCRIPTION.....</b>	<b>5</b>
1.1    Applicant .....	5
1.2    Manufacturer.....	5
1.3    Feature of Equipment Under Test .....	5
1.4    Product Specification of Equipment Under Test.....	5
1.5    Modification of EUT .....	6
1.6    Testing Site.....	6
1.7    Applied Standards .....	6
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>7</b>
2.1    Descriptions of Test Mode .....	7
2.2    Test Mode.....	8
2.3    Connection Diagram of Test System.....	9
2.4    Support Unit used in test configuration and system .....	10
2.5    EUT Operation Test Setup .....	10
2.6    Measurement Results Explanation Example.....	10
<b>3 TEST RESULT .....</b>	<b>11</b>
3.1    6dB Bandwidth Measurement .....	11
3.2    Peak Output Power Measurement .....	14
3.3    Power Spectral Density Measurement .....	16
3.4    Conducted Band Edges and Spurious Emission Measurement .....	21
3.5    Radiated Band Edges and Spurious Emission Measurement .....	30
3.6    AC Conducted Emission Measurement.....	39
3.7    Antenna Requirements .....	43
<b>4 LIST OF MEASURING EQUIPMENT.....</b>	<b>44</b>
<b>5 UNCERTAINTY OF EVALUATION.....</b>	<b>45</b>

### APPENDIX A. SETUP PHOTOGRAPHS





## SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	RSS-210 A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)(1)	RSS-210 A8.1(b)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	RSS-210 A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}$	Pass	-
3.4	15.247(d)	RSS-210 A8.5	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 8.30 dB at 35.400 MHz
3.6	15.207	RSS-Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 9.10 dB at 0.190 MHz
3.7	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-



## 1 General Description

### 1.1 Applicant

**Acer Incorporated**

8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 22181, Taiwan (R.O.C.)

### 1.2 Manufacturer

**Shanghai Sunrise Simcom Limited**

No. 888, Shengli Rd., Qingpu, Shanghai, P.R.China 201700

### 1.3 Feature of Equipment Under Test

Product Feature	
<b>Equipment</b>	Smart HandHeld
<b>Brand Name</b>	Acer
<b>Model Name</b>	S510
<b>Marketing Name</b>	Liquid S1
<b>FCC ID</b>	HLZEMS510
<b>EUT supports Radios application</b>	GSM/EGPRS/WCDMA/HSPA WLAN 11b/g/n HT20/HT40 Bluetooth v3.0 + EDR Bluetooth 4.0 + LE
<b>EUT Stage</b>	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
<b>Tx/Rx Frequency Range</b>	2402 MHz ~ 2480 MHz
<b>Number of Channels</b>	40
<b>Carrier Frequency of Each Channel</b>	40 Channel(37 hopping + 3 advertising channel)
<b>Maximum Output Power to Antenna</b>	-0.56 dBm (0.0009 W)
<b>Antenna Type</b>	IFA Antenna with gain 0.03 dBi
<b>Type of Modulation</b>	Bluetooth 4.0 - LE : GFSK



## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL INC.		
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC/IC Registration No.</b>
	TH02-HY	CO05-HY	03CH06-HY

**Note:** The test site complies with ANSI C63.4 2003 requirement.

## 1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
- ANSI C63.4-2003

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

The RF output power was recorded in the following table:

Channel	Frequency	Bluetooth 4.0 – LE RF Output Power
		Data Rate / Modulation
		GFSK
		1Mbps
Ch00	2402MHz	-0.56 dBm
Ch19	2440MHz	-0.64 dBm
Ch39	2480MHz	-0.64 dBm

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (X plane as worst plane) from all possible combinations.
  
- b. AC power line Conducted Emission was tested under maximum output power.




## 2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 4.0 – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1: WCDMA Band II Idle + Bluetooth Link + WLAN Link + Camera (Back) + Earphone + Battery + USB Cable ( Data Link with Notebook) + SIM 2

## 2.3 Connection Diagram of Test System

### <Bluetooth 4.0 – LE Tx Mode>

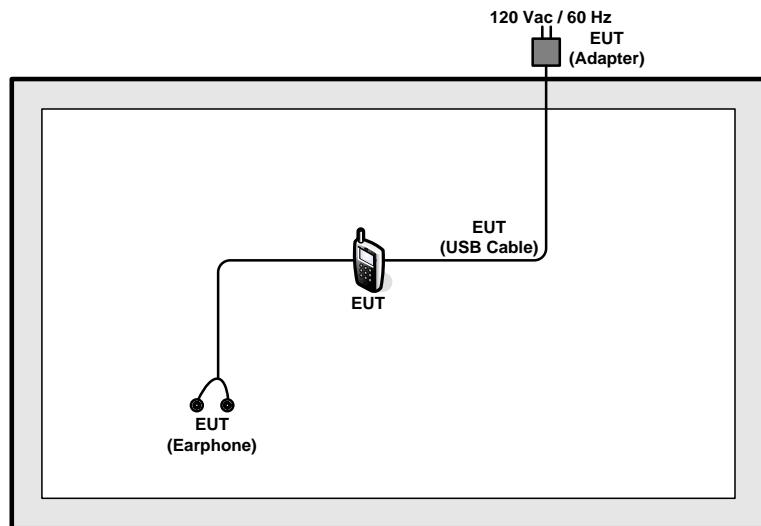

### <AC Conducted Emission Mode>

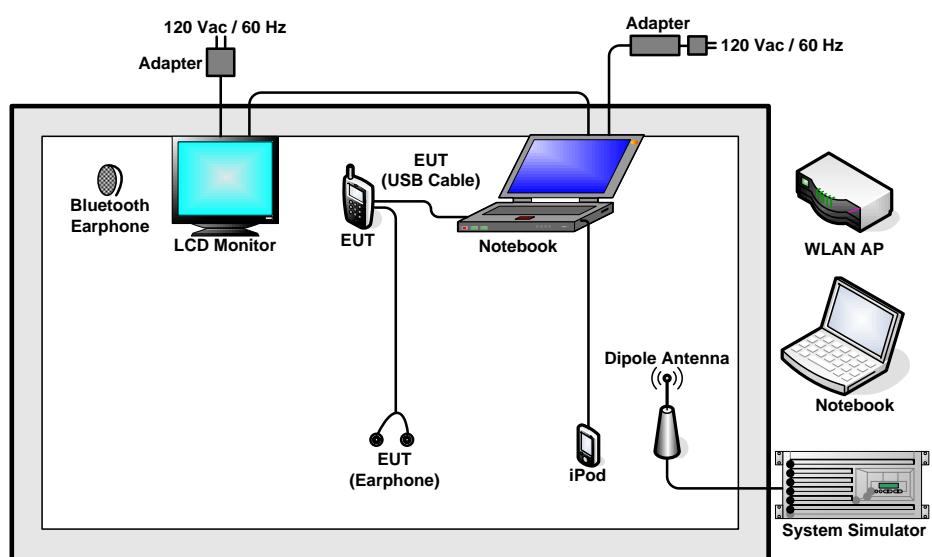



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude E6320	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
5.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A
6.	LCD Monitor	DELL	U2410	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m
7.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT transmitting and receiving signals.

## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### **3 Test Result**

#### **3.1 6dB Bandwidth Measurement**

##### **3.1.1 Limit of 6dB Bandwidth**

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### **3.1.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

##### **3.1.3 Test Procedures**

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

##### **3.1.4 Test Setup**

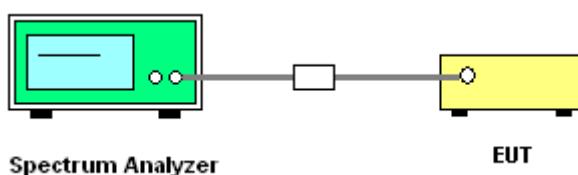




### 3.1.5 Test Result of 6dB Bandwidth

<b>Test Mode :</b>	Bluetooth 4.0 - LE	<b>Temperature :</b>	22~25°C
<b>Test Engineer :</b>	Reece Li	<b>Relative Humidity :</b>	51~55%


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
00	2402	0.68	0.5	Pass
19	2440	0.68	0.5	Pass
39	2480	0.69	0.5	Pass

## 6 dB Bandwidth Plot on Channel 00

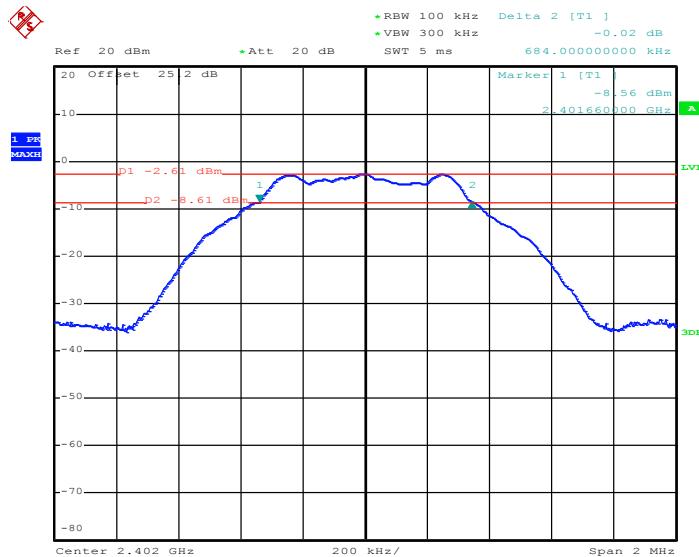


Date: 31.OCT.2013 20:10:24

### 6 dB Bandwidth Plot on Channel 19

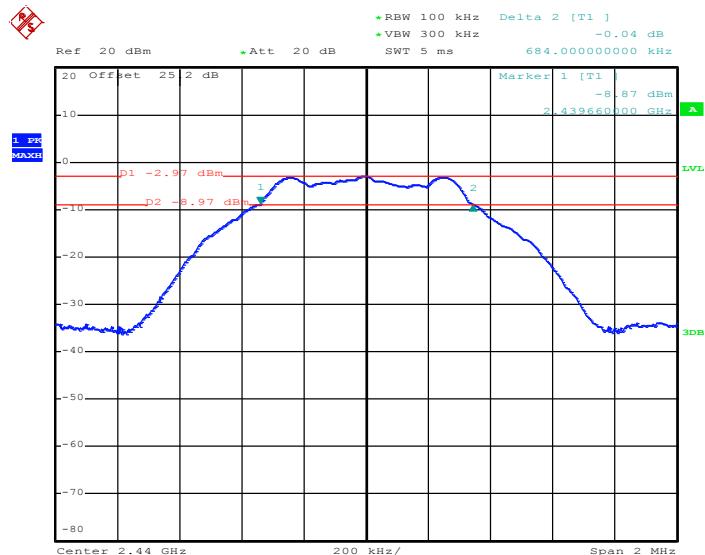

Date: 31.OCT.2013 20:07:34

### 6 dB Bandwidth Plot on Channel 39

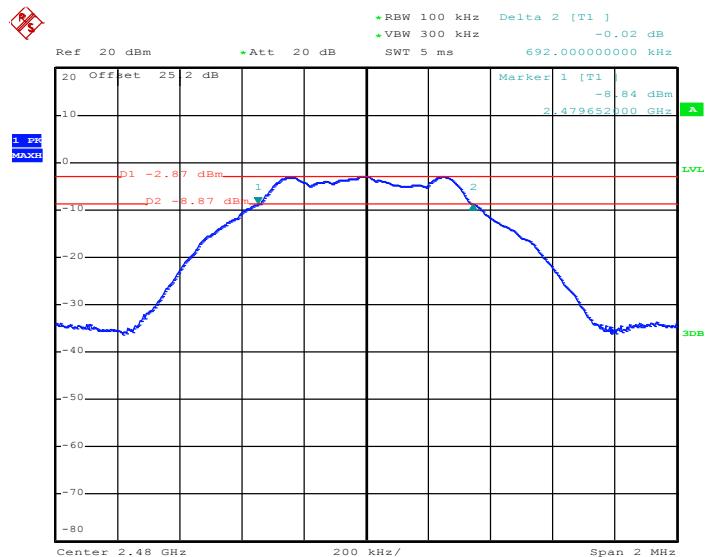

Date: 31.OCT.2013 20:13:14

## **3.2 Peak Output Power Measurement**

### **3.2.1 Limit of Peak Output Power**

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### **3.2.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### **3.2.3 Test Procedures**

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r01.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### **3.2.4 Test Setup**

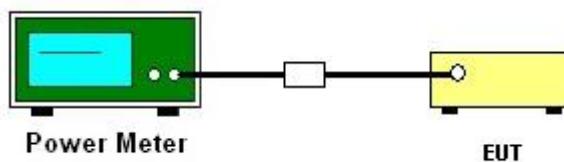



## 3.2.5 Test Result of Peak Output Power

Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Engineer :	Reece Li	Relative Humidity :	51~55%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	-0.56	30.00	Pass
19	2440	-0.64	30.00	Pass
39	2480	-0.64	30.00	Pass

### **3.3 Power Spectral Density Measurement**

#### **3.3.1 Limit of Power Spectral Density**

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### **3.3.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

#### **3.3.3 Test Procedures**

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### **3.3.4 Test Setup**

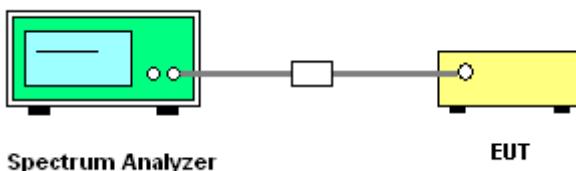

### 3.3.5 Test Result of Power Spectral Density

<b>Test Mode :</b>	Bluetooth 4.0 - LE	<b>Temperature :</b>	22~25°C
<b>Test Engineer :</b>	Reece Li	<b>Relative Humidity :</b>	51~55%


<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Power Density</b>		<b>Max. Limits (dBm/3kHz)</b>	<b>Pass/Fail</b>
		<b>PSD/100kHz (dBm)</b>	<b>PSD/3kHz (dBm)</b>		
00	2402	-2.62	-16.90	8	Pass
19	2440	-2.97	-17.23	8	Pass
39	2480	-2.91	-17.13	8	Pass

**Note:**

1. Measured power density (dBm) has offset with cable loss.
2. The Measured power density (dBm)/ 100kHz is reference level and used as 20dBc down for Conducted Band Edges and Conducted Spurious Emission limit line.


### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)

**PSD 100kHz Plot on Channel 00**

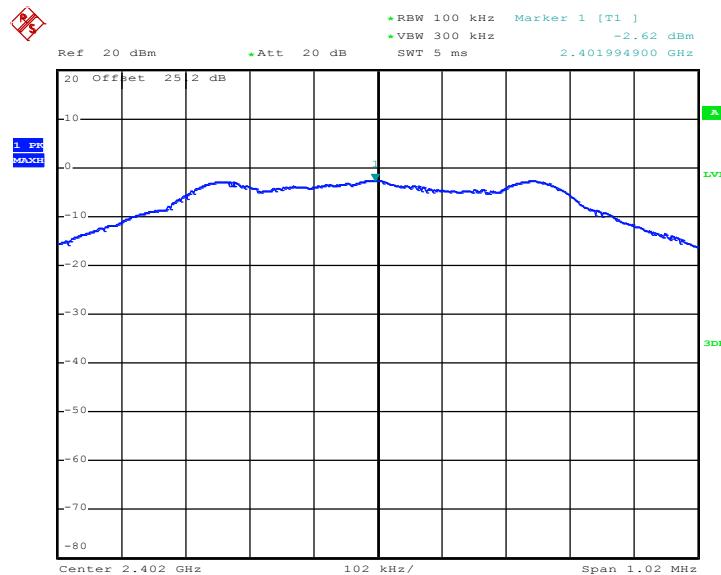


Date: 31.OCT.2013 20:10:54

**PSD 100kHz Plot on Channel 19**

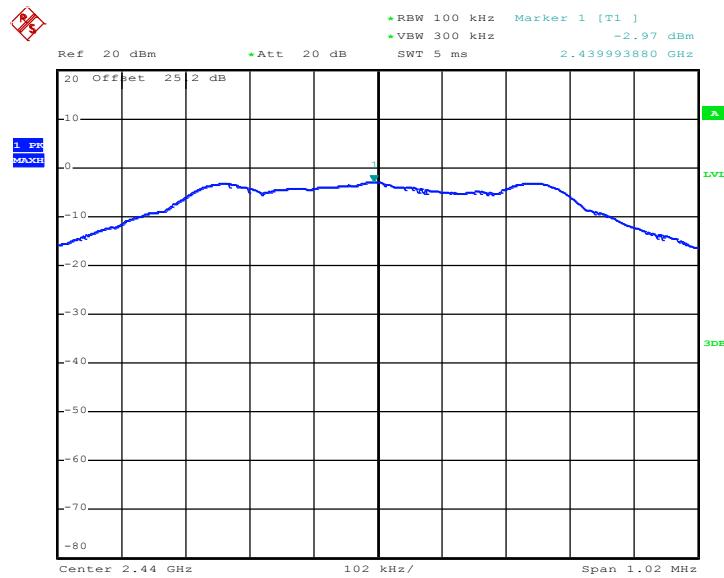

Date: 31.OCT.2013 20:08:13


**PSD 100kHz Plot on Channel 39**

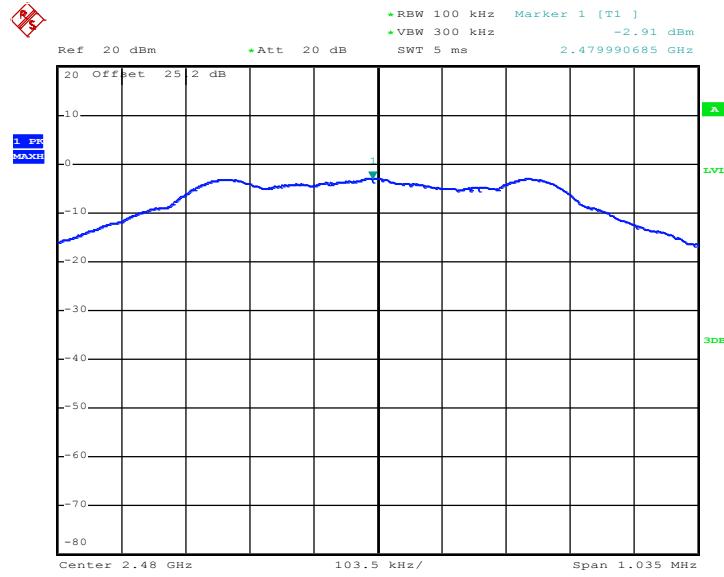

Date: 31.OCT.2013 20:13:50


### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)

#### PSD 3kHz Plot on Channel 00

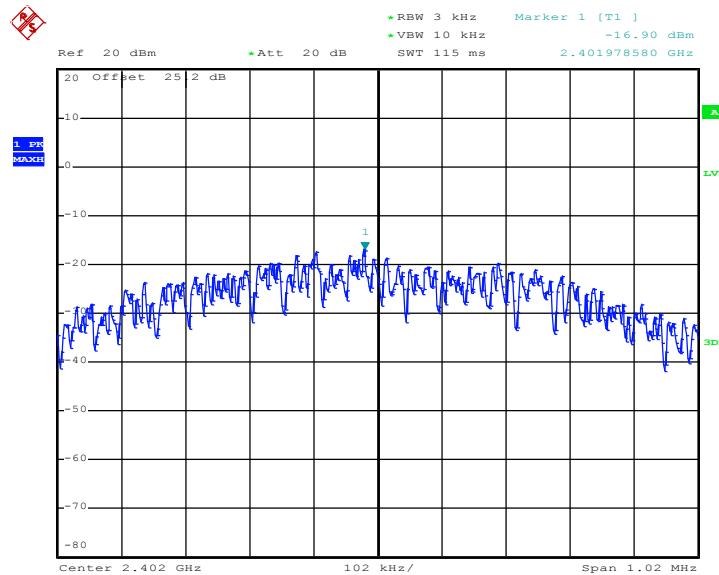

Date: 31.OCT.2013 20:10:44


#### PSD 3kHz Plot on Channel 19

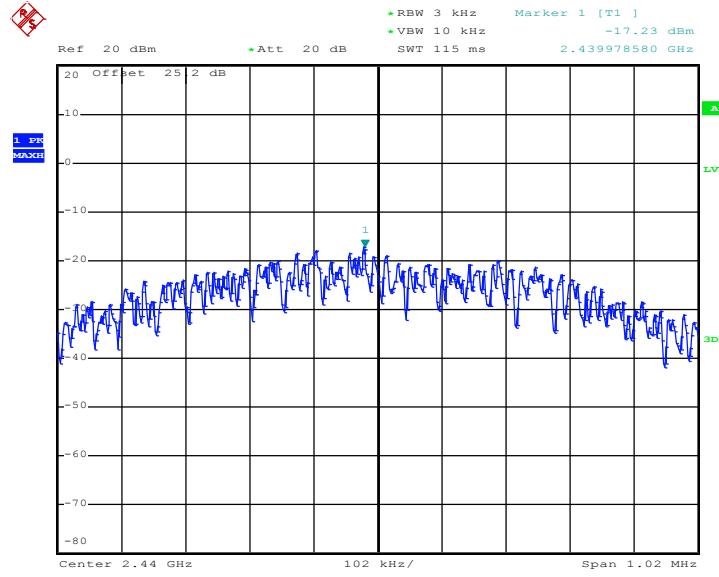

Date: 31.OCT.2013 20:07:54



PSD 3kHz Plot on Channel 39

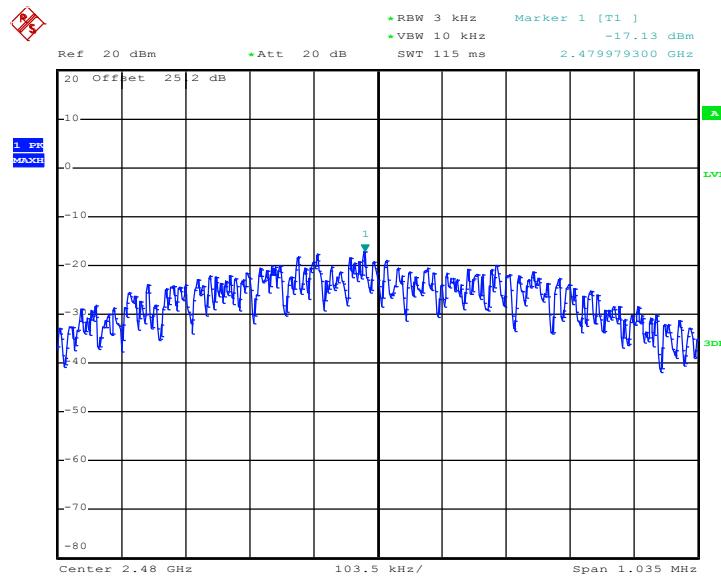

Date: 31.OCT.2013 20:13:41

## **3.4 Conducted Band Edges and Spurious Emission Measurement**

### **3.4.1 Limit of Conducted Band Edges and Spurious Emission**

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


### **3.4.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### **3.4.3 Test Procedure**

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### **3.4.4 Test Setup**

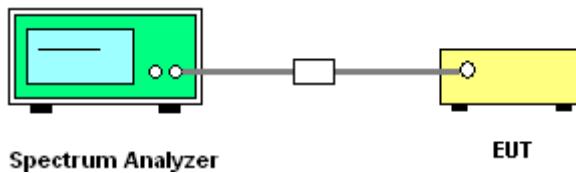

### 3.4.5 Test Result of Conducted Band Edges

<b>Test Mode :</b>	Bluetooth 4.0 - LE	<b>Temperature :</b>	22~25°C
<b>Test Channel :</b>	00 and 39	<b>Relative Humidity :</b>	51~55%
		<b>Test Engineer :</b>	Reece Li


**Low Band Edge Plot on Channel 00**

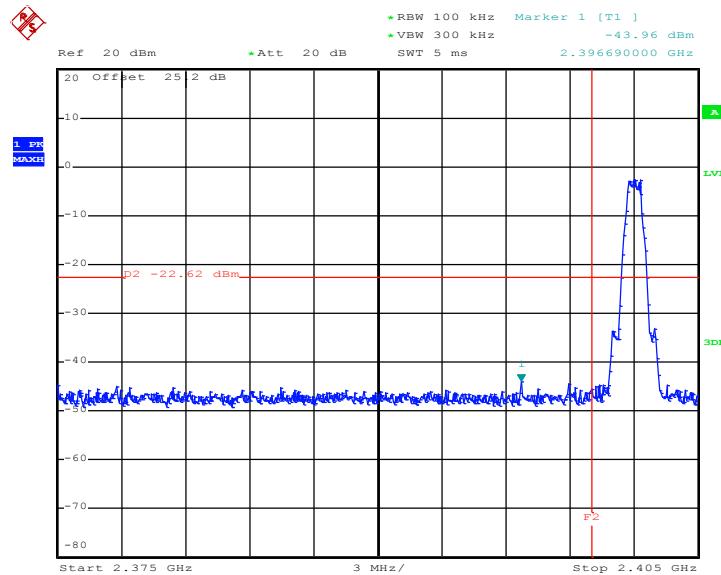

Date: 31.OCT.2013 20:11:10



## High Band Edge Plot on Channel 39

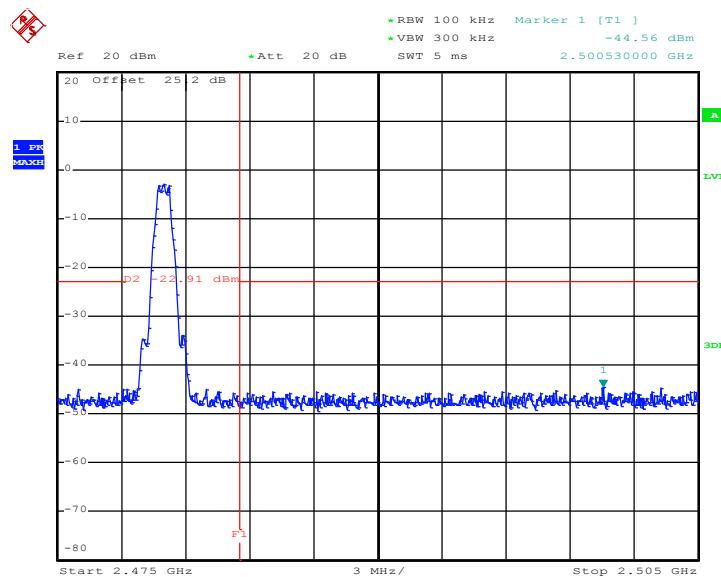


Date: 31.OCT.2013 20:14:06

### 3.4.6 Test Result of Conducted Spurious Emission

<b>Test Mode :</b>	Bluetooth 4.0 - LE	<b>Temperature :</b>	22~25°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	51~55%
		<b>Test Engineer :</b>	Reece Li

**Conducted Spurious Emission Plot on Bluetooth LE 1Mbps**


**GFSK Channel 00**

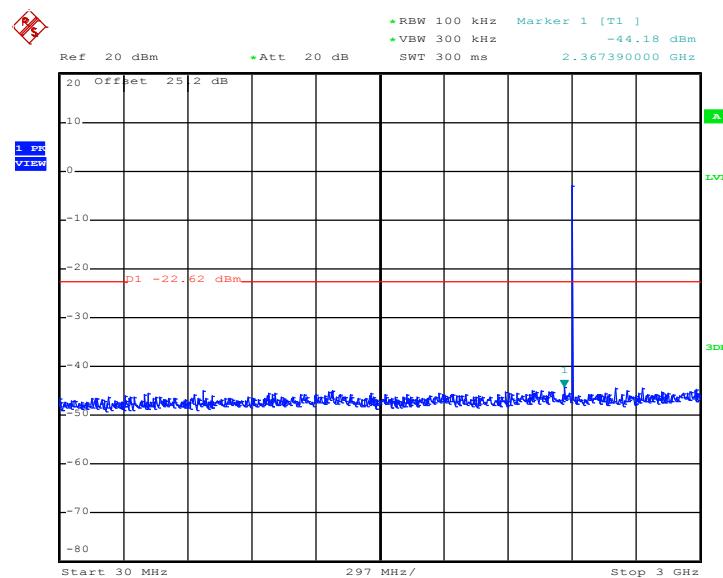

Date: 31.OCT.2013 20:11:34



**Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 00**

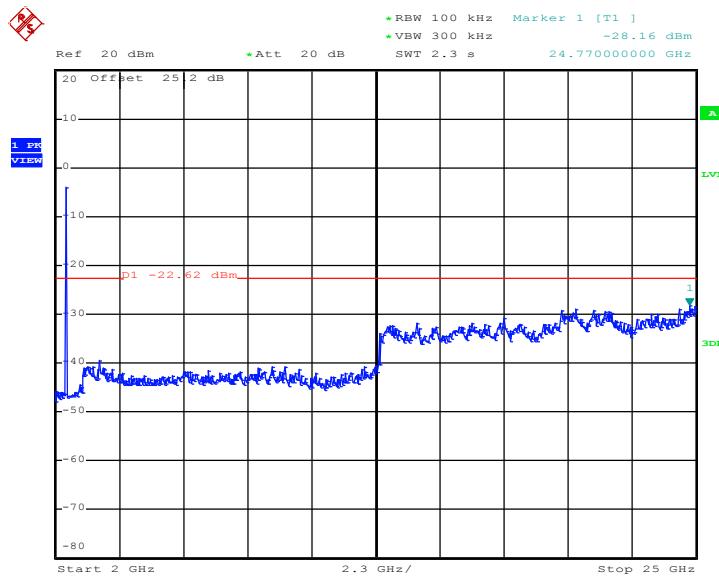


Date: 31.OCT.2013 20:11:52



<b>Test Mode :</b>	Bluetooth 4.0 - LE	<b>Temperature :</b>	22~25°C
<b>Test Channel :</b>	19	<b>Relative Humidity :</b>	51~55%
		<b>Test Engineer :</b>	Reece Li


**Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 19**

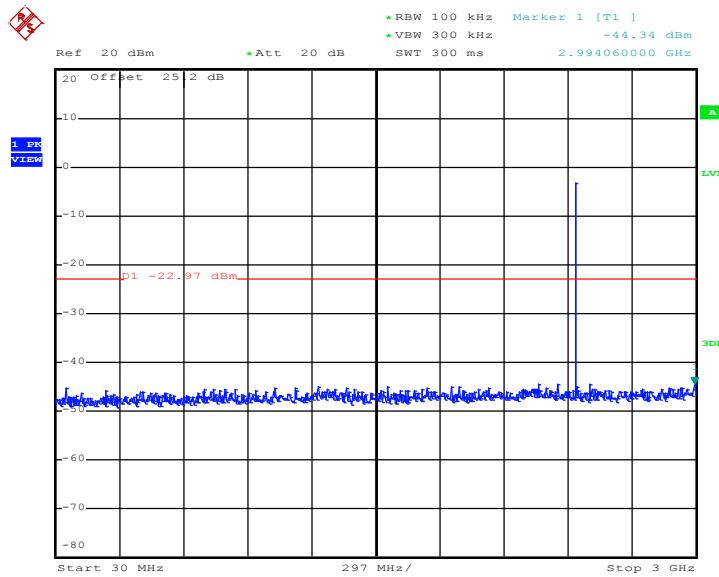

Date: 31.OCT.2013 20:08:33




**Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 19**

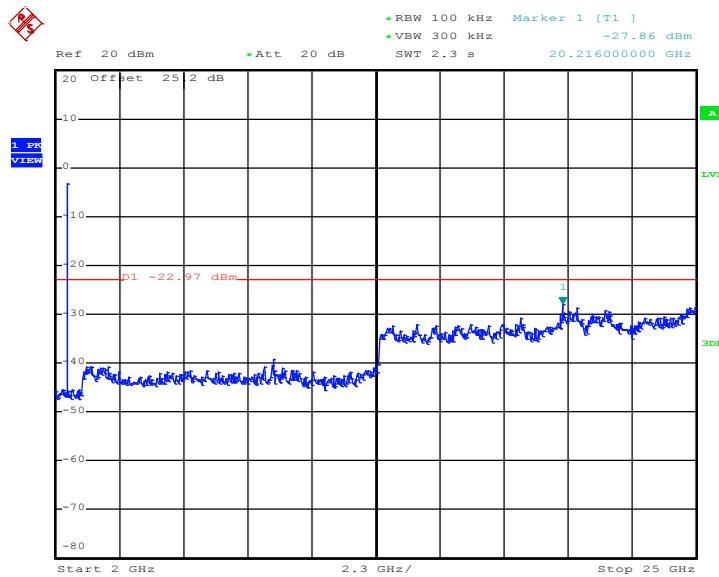

Date: 31.OCT.2013 20:08:51




<b>Test Mode :</b>	Bluetooth 4.0 - LE	<b>Temperature :</b>	22~25°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	51~55%
		<b>Test Engineer :</b>	Reece Li

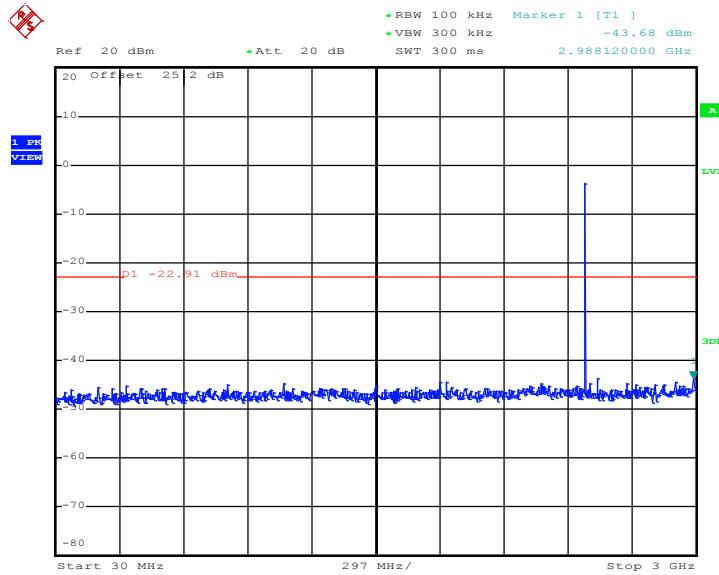**Conducted Spurious Emission Plot on Bluetooth LE 1Mbps****GFSK Channel 39**

Date: 31.OCT.2013 20:14:25



**Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 39**

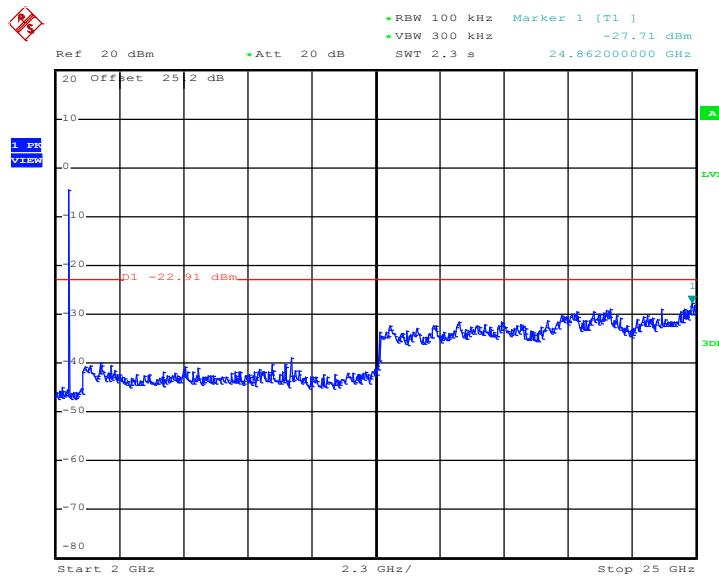

Date: 31.OCT.2013 20:14:44



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



### 3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.


For average measurement:

  - VBW = 10 Hz, when duty cycle is no less than 98 percent.
  - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(μs)	1/T(kHz)	VBW Setting
Bluetooth 4.0 - LE	61.15	384.00	2.604	3kHz

### 3.5.4 Test Setup


For radiated emissions below 30MHz

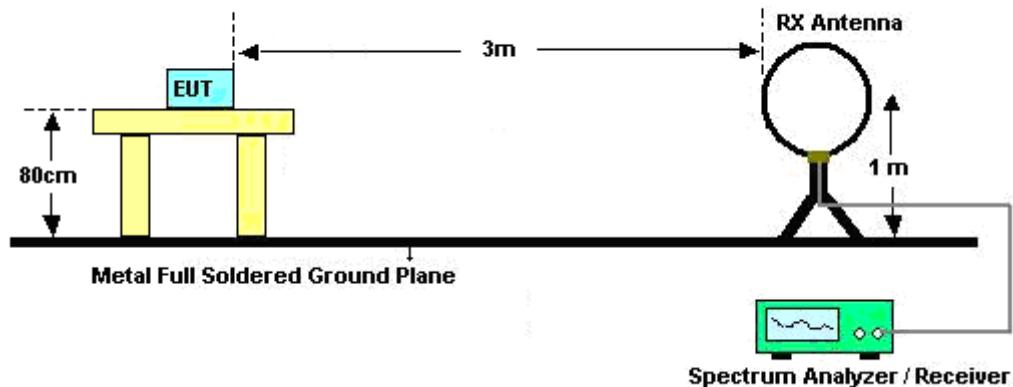

For radiated emissions from 30MHz to 1GHz

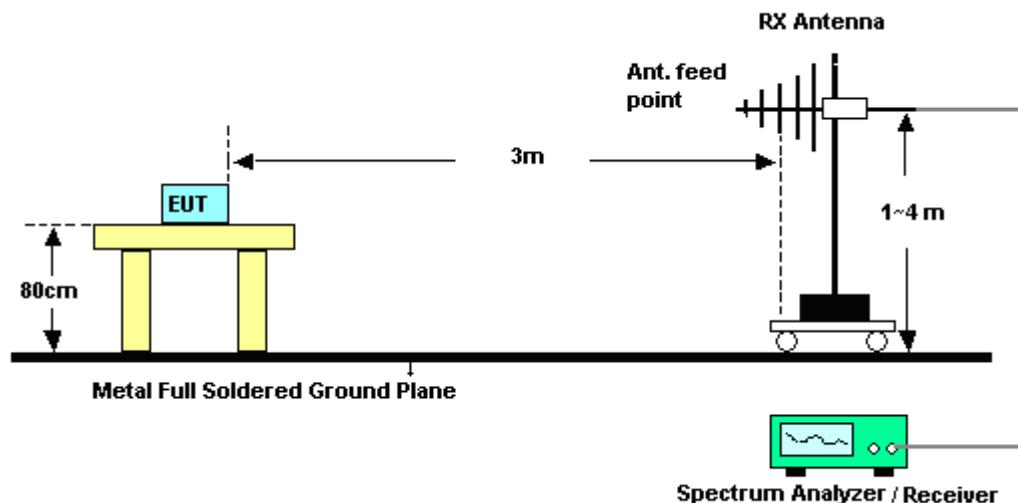

**For radiated emissions above 1GHz**

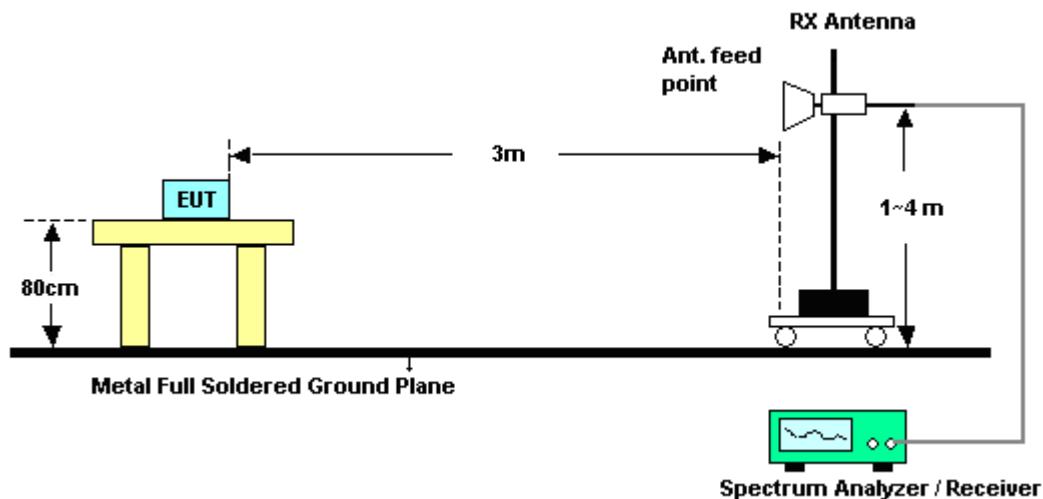

### **3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



## 3.5.6 Test Result of Radiated Spurious at Band Edges

Test Mode :	Mode 1			Temperature :		22~24°C		
Test Channel :	00			Relative Humidity :		47~49%		
				Test Engineer :		Marlboro Hsu		

## ANTENNA POLARITY : HORIZONTAL

Frequency ( MHz )	Level ( dB $\mu$ V / m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V / m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2386.05	46.04	-27.96	74	42	31.92	6.45	34.33	200	89	Peak
2386.14	35.84	-18.16	54	31.8	31.92	6.45	34.33	200	89	Average

## ANTENNA POLARITY : VERTICAL

Frequency ( MHz )	Level ( dB $\mu$ V / m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V / m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2377.86	45.19	-28.81	74	41.2	31.9	6.42	34.33	100	16	Peak
2381.01	33.48	-20.52	54	29.46	31.9	6.45	34.33	100	16	Average

Test Mode :	Mode 3			Temperature :		22~24°C		
Test Channel :	39			Relative Humidity :		47~49%		
				Test Engineer :		Marlboro Hsu		

## ANTENNA POLARITY : HORIZONTAL

Frequency ( MHz )	Level ( dB $\mu$ V / m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V / m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.53	50.21	-23.79	74	45.93	31.99	6.59	34.3	193	68	Peak
2483.5	40.5	-13.5	54	36.22	31.99	6.59	34.3	193	68	Average

## ANTENNA POLARITY : VERTICAL

Frequency ( MHz )	Level ( dB $\mu$ V / m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V / m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2486.83	46.35	-27.65	74	42.07	31.99	6.59	34.3	100	183	Peak
2483.5	34.74	-19.26	54	30.46	31.99	6.59	34.3	100	183	Average



### 3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

**Note:** Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	22~24°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Marlboro Hsu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2402 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2402	95.56	-	-	91.52	31.92	6.45	34.33	200	89	Average
2402	97.01	-	-	92.97	31.92	6.45	34.33	200	89	Peak
4803	45.01	-28.99	74	56	34.41	10.16	55.56	100	0	Peak

**Note:** Other harmonics are lower than background noise.

<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	22~24°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Marlboro Hsu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2402 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2402	87.13	-	-	83.09	31.92	6.45	34.33	100	16	Average
2402	88.54	-	-	84.5	31.92	6.45	34.33	100	16	Peak
4803	44.66	-29.34	74	55.65	34.41	10.16	55.56	100	0	Peak

**Note:** Other harmonics are lower than background noise.



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	22~24°C
<b>Test Channel :</b>	19	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Marlboro Hsu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2440 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2440	96.35	-	-	92.19	31.96	6.52	34.32	200	84	Average
2440	97.51	-	-	93.35	31.96	6.52	34.32	200	84	Peak
4881	45.87	-28.13	74	56.99	34.37	10.19	55.68	100	0	Peak
7320	46.29	-27.71	74	55.99	35.6	10.94	56.24	100	0	Peak

**Note:** Other harmonics are lower than background noise.

<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	22~24°C
<b>Test Channel :</b>	19	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Marlboro Hsu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2440 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2440	87.34	-	-	83.18	31.96	6.52	34.32	100	183	Average
2440	88.78	-	-	84.62	31.96	6.52	34.32	100	183	Peak
4881	45	-29	74	56.12	34.37	10.19	55.68	100	0	Peak
7320	45.7	-28.3	74	55.4	35.6	10.94	56.24	100	0	Peak

**Note:** Other harmonics are lower than background noise.



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	22~24°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Marlboro Hsu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2480 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
120.45	26.42	-17.08	43.5	44.75	12.2	1.22	31.75	-	-	Peak
176.34	27.23	-16.27	43.5	47.96	9.5	1.52	31.75	100	156	Peak
214.95	25.39	-18.11	43.5	46.39	9.15	1.6	31.75	-	-	Peak
569.5	21.35	-24.65	46	31.44	19.3	2.63	32.02	-	-	Peak
755	22.06	-23.94	46	30.79	20.2	3.05	31.98	-	-	Peak
935.6	23.73	-22.27	46	30.31	21.26	3.36	31.2	-	-	Peak
2480	95.59	-	91.31	31.99	6.59	34.3	193	68	Average	
2480	96.9	-	92.62	31.99	6.59	34.3	193	68	Peak	
4959	45.07	-28.93	74	56.38	34.32	10.21	55.84	100	0	Peak
7440	46.45	-27.55	74	56.02	35.53	10.9	56	100	0	Peak

**Note:** Other harmonics are lower than background noise.



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	22~24°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	47~49%
<b>Test Engineer :</b>	Marlboro Hsu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2480 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
35.4	31.7	-8.3	40	47.81	14.98	0.7	31.79	100	95	Peak
51.06	23.16	-16.84	40	46.15	7.98	0.81	31.78	-	-	Peak
91.56	25.4	-18.1	43.5	47.2	8.9	1.06	31.76	-	-	Peak
573	21.44	-24.56	46	31.48	19.33	2.65	32.02	-	-	Peak
685	21.45	-24.55	46	31.22	19.4	2.86	32.03	-	-	Peak
804	22.18	-23.82	46	30.96	20.08	3.07	31.93	-	-	Peak
2480	86.74	-	-	82.46	31.99	6.59	34.3	100	183	Average
2480	88.12	-	-	83.84	31.99	6.59	34.3	100	183	Peak
4959	44.16	-29.84	74	55.47	34.32	10.21	55.84	100	0	Peak
7440	46.18	-27.82	74	55.75	35.53	10.9	56	100	0	Peak

**Note:** Other harmonics are lower than background noise.



## 3.6 AC Conducted Emission Measurement

### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.6.4 Test Setup

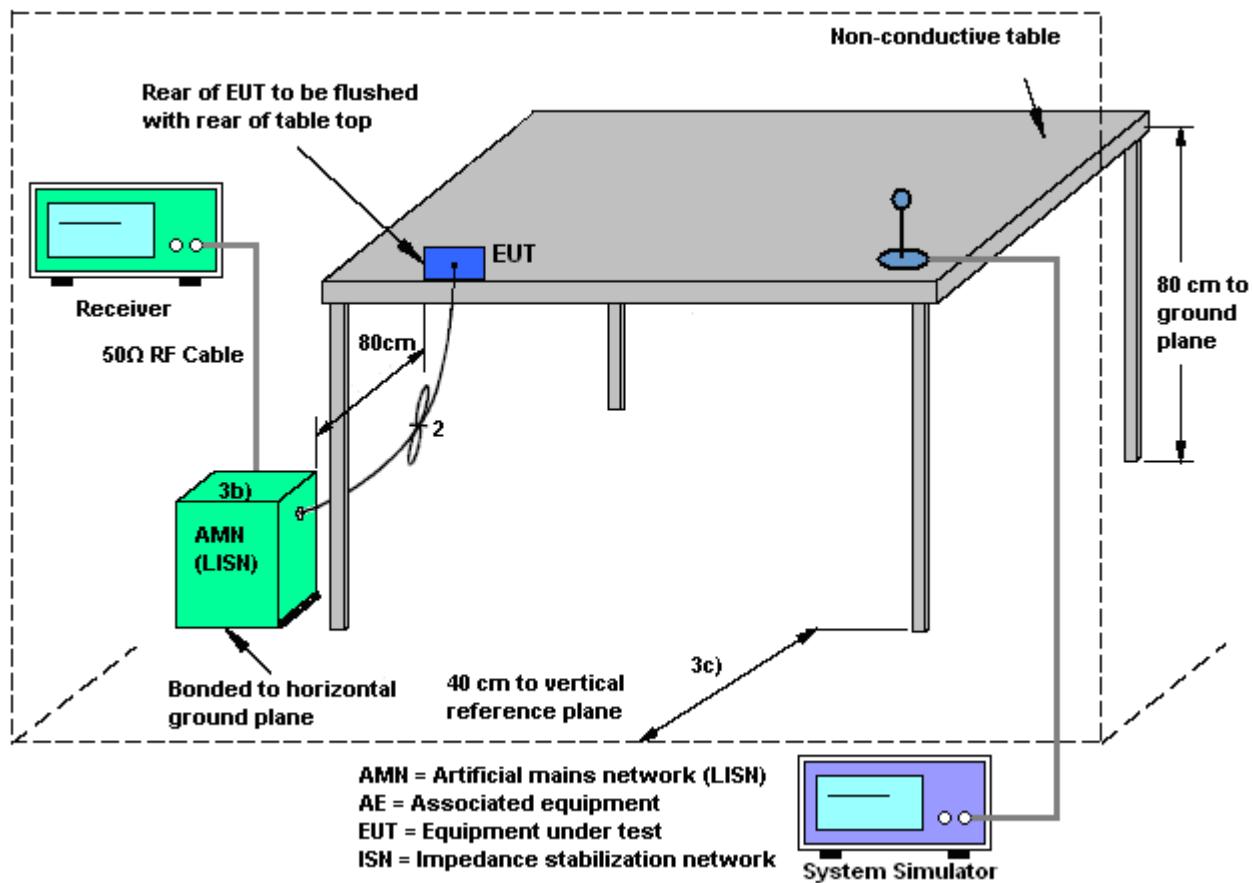

## 3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Cosmo Xu	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WCDMA Band II Idle + Bluetooth Link + WLAN Link + Camera (Back) + Earphone + Battery + USB Cable ( Data Link with Notebook ) + SIM 2		

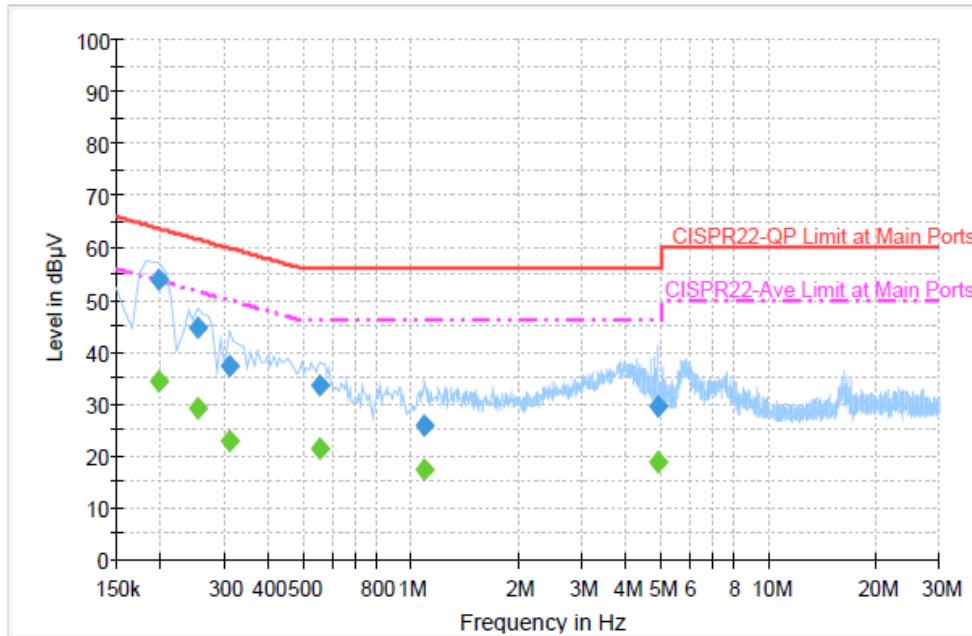


## Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.198000	54.0	Off	L1	19.3	9.7	63.7
0.254000	44.8	Off	L1	19.5	16.8	61.6
0.310000	37.2	Off	L1	19.4	22.8	60.0
0.558000	33.6	Off	L1	19.4	22.4	56.0
1.094000	25.9	Off	L1	19.5	30.1	56.0
4.918000	29.6	Off	L1	19.6	26.4	56.0

## Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.198000	34.3	Off	L1	19.3	19.4	53.7
0.254000	29.2	Off	L1	19.5	22.4	51.6
0.310000	22.7	Off	L1	19.4	27.3	50.0
0.558000	21.3	Off	L1	19.4	24.7	46.0
1.094000	17.5	Off	L1	19.5	28.5	46.0
4.918000	19.0	Off	L1	19.6	27.0	46.0

<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	20~22°C
<b>Test Engineer :</b>	Cosmo Xu	<b>Relative Humidity :</b>	45~47%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Neutral
<b>Function Type :</b>	WCDMA Band II Idle + Bluetooth Link + WLAN Link + Camera (Back) + Earphone + Battery + USB Cable ( Data Link with Notebook ) + SIM 2		

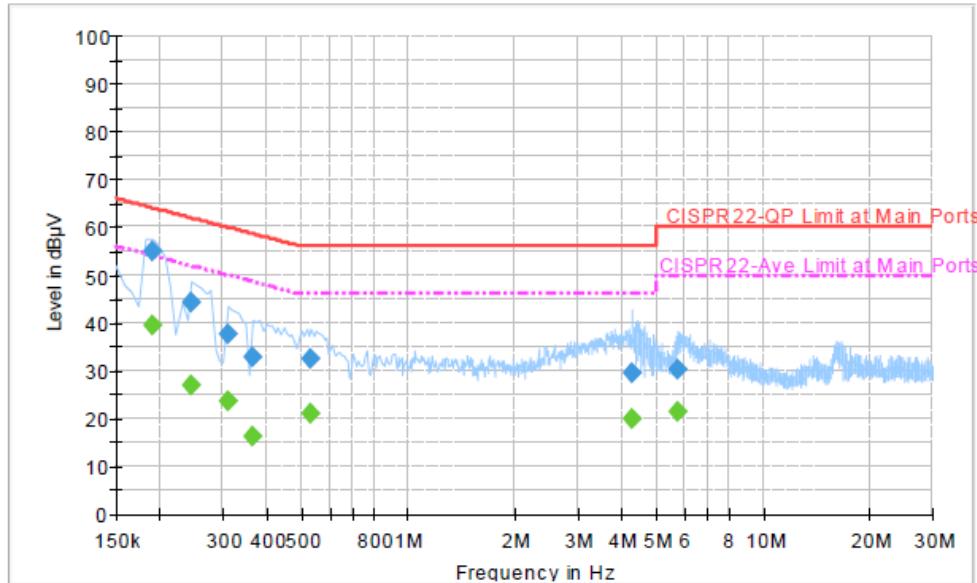

## Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190000	54.9	Off	N	19.4	9.1	64.0
0.246000	44.3	Off	N	19.4	17.6	61.9
0.310000	37.5	Off	N	19.4	22.5	60.0
0.366000	32.8	Off	N	19.4	25.8	58.6
0.534000	32.3	Off	N	19.4	23.7	56.0
4.270000	29.5	Off	N	19.6	26.5	56.0
5.774000	30.1	Off	N	19.6	29.9	60.0

## Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190000	39.6	Off	N	19.4	14.4	54.0
0.246000	27.0	Off	N	19.4	24.9	51.9
0.310000	23.6	Off	N	19.4	26.4	50.0
0.366000	16.1	Off	N	19.4	32.5	48.6
0.534000	20.9	Off	N	19.4	25.1	46.0
4.270000	20.0	Off	N	19.6	26.0	46.0
5.774000	21.3	Off	N	19.6	28.7	50.0



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 07, 2013	Oct. 31, 2013	Jun. 06, 2014	Conducted (TH02-HY)
Power Meter	Agilent	E4416A	GB41292344	300MHz~40GHz	Feb. 05, 2013	Oct. 31, 2013	Feb. 04, 2014	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US40441548	300MHz~40GHz	Feb. 05, 2013	Oct. 31, 2013	Feb. 04, 2014	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 07, 2013	Nov. 06, 2013	Jun. 06, 2014	Radiation (03CH06-HY)
Spectrum Analyzer	Agilent	E4408B	MY44211030	9kHz ~ 26.5GHz	Nov. 26, 2012	Nov. 06, 2013	Nov. 25, 2013	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESVS10	834468/0003	20MHz ~ 1000MHz	May 06, 2013	Nov. 06, 2013	May 05, 2014	Radiation (03CH06-HY)
Bilog Antenna	Schaffner	CBL6112B	2885	30MHz -2GHz	Oct. 10, 2013	Nov. 06, 2013	Oct. 09, 2014	Radiation (03CH06-HY)
Double Ridge Horn Antenna	EMCO	3117	00066583	1GHz ~ 18GHz	Aug. 02, 2013	Nov. 06, 2013	Aug. 01, 2014	Radiation (03CH06-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	860004/0001	9 kHz~30 MHz	Jul. 03, 2012	Nov. 06, 2013	Jul. 03, 2014	Radiation (03CH06-HY)
Amplifier	Agilent	310N	186713	9kHz ~ 1GHz	Apr. 12, 2013	Nov. 06, 2013	Apr. 11, 2014	Radiation (03CH06-HY)
Pre Amplifier	EMCI	EMC0518 45	SN980048	1GHz ~ 18GHz	Jul. 18, 2013	Nov. 06, 2013	Jul. 17, 2014	Radiation (03CH06-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz ~ 40GHz	Oct. 03, 2013	Nov. 06, 2013	Oct. 02, 2014	Radiation (03CH06-HY)
Preamplifier	Agilent	8449B	3008A01917	1GHz ~ 26.5GHz	Apr. 12, 2013	Nov. 06, 2013	Apr. 11, 2014	Radiation (03CH06-HY)
Turn Table	INN-CO	DS2000	420/650/00	0 - 360 degree	N/A	Nov. 06, 2013	N/A	Radiation (03CH06-HY)
Antenna Mast	MF	MF-7802	MF780208212	1 m ~ 4 m	N/A	Nov. 06, 2013	N/A	Radiation (03CH06-HY)
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9kHz ~ 2.75GHz	Nov. 13, 2012	Nov. 01, 2013	Nov. 12, 2013	Conduction (CO05-HY)
Two-LISN (for auxiliary equipment)	Rohde & Schwarz	ENV216	100081	9kHz ~ 30MHz	Dec. 12, 2012	Nov. 01, 2013	Dec. 11, 2013	Conduction (CO05-HY)
Two-LISN	Rohde & Schwarz	ENV216	100080	9kHz ~ 30MHz	Dec. 06, 2012	Nov. 01, 2013	Dec. 05, 2013	Conduction (CO05-HY)
AC Power Source	APC	APC-1000 W	N/A	N/A	N/A	Nov. 01, 2013	N/A	Conduction (CO05-HY)



## **5 Uncertainty of Evaluation**

### **Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)**

<b>Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))</b>	<b>2.26</b>
--	-------------

### **Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)**

<b>Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))</b>	<b>4.50</b>
--	-------------

## Appendix A. Setup Photographs


### <Conducted Emission>



**<Radiated Emission>**

**X Plane**

**LF**

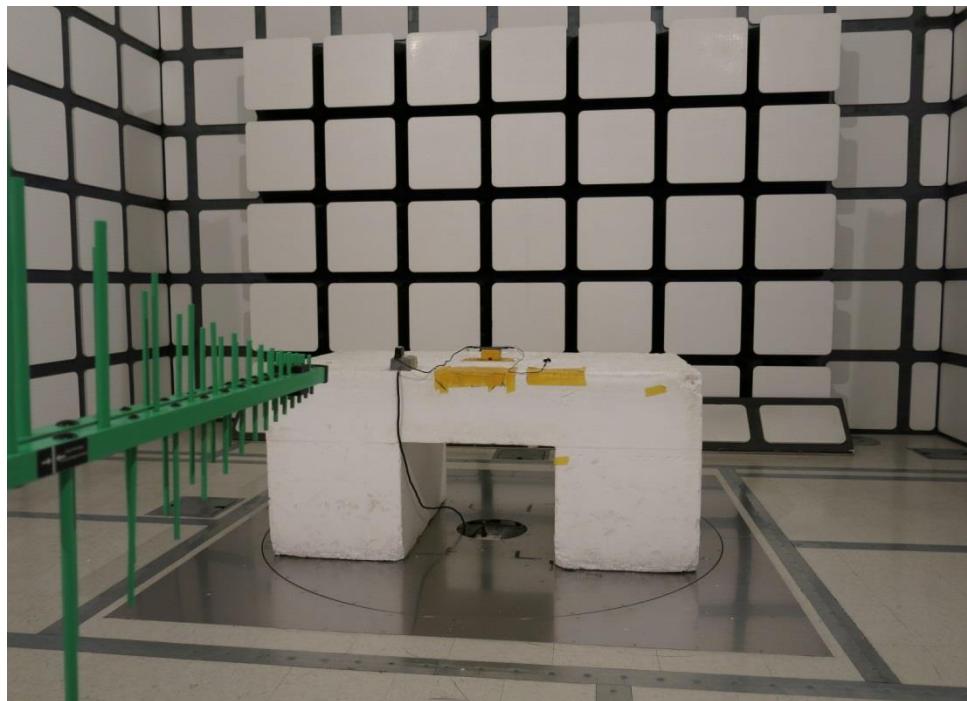

**HF**

