



## Appendix F. FCC 3G SAR Measurement Procedures


### Conducted Output Power:

The PBA is fulfilled. The EUT was tested according to the requirements of the FCC 3G procedures and the TS 34.121. The EUT's WCDMA and HSPA function is Release 6 version supporting HSDPA Category 8, and HSUPA Category 5. A detailed analysis of the output power for all WCDMA and HSPA (HSUPA & HSDPA) modes is provided in the tables below. According to the FCC 3G procedures, handsets with both HSDPA and HSUPA should be tested according to Release 6 HSPA test procedures, and the EUT does not support VOIP function over the HSPA function. Device was tested according to procedure KDB941225 - section Release 6 HSPA Data Devices as documented/evaluated in the following table.

WCDMA SAR Test mode - Conducted Power							
Mode	Setup	Cell band (850)			PCS band (1900)		
		CH4132	CH4182	CH4233	CH9262	CH9400	CH9538
		826.4 (MHz)	836.4 (MHz)	846.6 (MHz)	1852.4 (MHz)	1880.0 (MHz)	1907.6 (MHz)
WCDMA	RMC 12.2Kbps	24.12	24.11	24.12	24.04	24.08	23.83
HSDPA	HSDPA - subtest 1	24.04	23.98	23.96	23.94	24.07	23.73
	HSDPA - subtest 2	23.85	23.79	23.80	23.84	23.98	23.69
	HSDPA - subtest 3	23.37	23.28	23.33	23.41	23.58	23.51
	HSDPA - subtest 4	23.32	23.38	23.31	23.30	23.60	23.29
HSUPA	HSUPA - subtest 1	23.84	23.55	23.82	23.35	23.48	23.23
	HSUPA - subtest 2	22.18	22.13	22.02	22.06	21.93	21.86
	HSUPA - subtest 3	22.61	22.52	22.44	22.40	22.47	22.44
	HSUPA - subtest 4	22.23	22.19	22.14	22.17	22.82	22.04
	HSUPA - subtest 5	23.81	23.62	23.83	23.01	23.52	23.48

### WCDMA Setup Configuration:

- The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting
  - Data rates: Varied from RMC 12.2Kbps
  - RMC Test Loop = Loop Mode 1
  - Power Ctrl Mode = All Up bits
- The transmitted maximum output power was recorded.

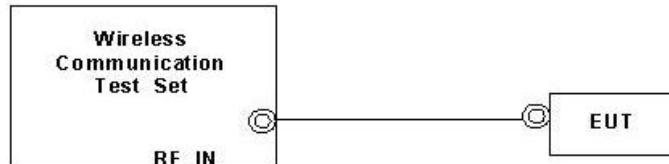

**Setup Configuration**

### HSDPA Setup Configuration:

- The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting:
  - Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - Set RMC12.2Kbps + HSDPA mode
  - Set Cell Power = -86 dBm
  - Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - Select HSDPA Uplink Parameters
  - Set DeltaACK, DeltaNACK and DeltaCQI = 8
  - Set Ack-Nack Repetition Factor to 3
  - Set CQI Feedback Cycle (k) to 4 ms
  - Set CQI Repetition Factor to 2
  - Power Ctrl Mode = All Up bits
- The transmitted maximum output power was recorded.

Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{hs} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Setup Configuration**

**HSPA (HSUPA & HSPDA) Setup Configuration:**

- The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting \* :
  - Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - Set Cell Power = -86 dBm
  - Set Channel Type = 12.2k + HSPA
  - Set UE Target Power
  - Power Ctrl Mode = Alternating bits
  - Set and observe the E-TFCI
  - Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- The transmitted maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1)	$\beta_{ec}$	$\beta_{ed}$ (Note 5) (Note 6)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:  $\Delta ACK, \Delta NACK$  and  $\Delta CQI = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ .Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6:  $\beta_{ed}$  can not be set directly, it is set by Absolute Grant Value.**Setup Configuration**

**Note:** For details settings in the Agilent 8960 test equipment, please refer to the user guide "HSUPA Measurement Guide with 8960 V7.5.0 Release 7 (2007-06) Ver.: v.02.18"



**Example for HSPA Subtest 1, and other subtests following table, C11.1.3  
(Gain Factors ( $\beta_c = 11$  and  $\beta_d = 15$ ))**

Call Control		Active Cell Operating Mode						Serving Grant			
Additional Screens		UE Information						AG Node			
		IMSI:						Single Shot			
Cell Parameters		IMEI:						Single Shot AG			
		Power Class:						20: (119/15)^2			
Generator Info		UE Expected Open Loop Transmit Power						Send Single Shot Absolute Grant			
		Initial PRACH TX Power:			-11.70 dBm		Send Relative Grant Up				
Uplink Parameters		Initial DPCCH TX Power:			-0.56 dBm		Send Relative Grant Down				
UE Rep Meas		Call Processing Status						Return			
		Current Service Type: <b>Abs Single Shot AG</b>						1 of 2			
Trig Output Setup		HII Status: Index 15: (67/15)^2						2 of 4			
Sys Frame Clock		GII Status: Index 16: (75/15)^2						3 of 4			
		Current DPCH: Index 17: (84/15)^2						4 of 4			
HSUPA In		UE Rep E-DCH: Index 18: (95/15)^2						5 of 4			
		Last Received: Index 19: (106/15)^2						6 of 4			
Throughput:		Throughput: Index 20: (119/15)^2						7 of 4			
ACKs Transmitted		ACKs Transmitted: -----						8 of 4			
		Active Cell Idle						9 of 4			
		IntRef Offset						10 of 4			

## Example: AG – Index = 20 for HSPA subtest 1



Call Setup Screen												E-TFCI Record
Screen Ctrl	Recorded E-TFCI Information											E-TFCI Rec Count
Channel (UARFCN) Info	E-TFCI Recording State											15
HSPA Information	Idle											
E-TFCI Recording Information	Recorded E-TFCI Values											Start Recording E-TFCI Values
Clear UE Info	1: 75	11: 75	21: ----	31: ----	41: ----							Send Step Up TPC Bit Pattern
Return	2: 75	12: 75	22: ----	32: ----	42: ----							Send Step Down TPC Bit Pattern
	3: 75	13: 75	23: ----	33: ----	43: ----							Return
	4: 75	14: 75	24: ----	34: ----	44: ----							
	5: 75	15: 75	25: ----	35: ----	45: ----							
	6: 75	16: ----	26: ----	36: ----	46: ----							
	7: 75	17: ----	27: ----	37: ----	47: ----							
	8: 75	18: ----	28: ----	38: ----	48: ----							
	9: 75	19: ----	29: ----	39: ----	49: ----							
	10: 75	20: ----	30: ----	40: ----	50: ----							
	15/15											
	Background	Active Cell Connected				Sys Type: UTRA FDD						
			IntRef	Offset								

Example: Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1



**Reference:**

- [1] 941225 D01 SAR test for 3G devices v02, SAR Measurement Procedures for 3G Devices CDMA 2000/Ev-Do/WCDMA/HSDPA/HSPA Oct. 2007 Laboratory Division Office of Engineering and Technology Federal Communications Commission
- [2.] TS 34.121 Universal Mobile Telecommunications System (UMTS); Terminal Conformance Specification, Radio Transmission and Reception (FDD)
- [3.] HSUPA Measurement Guide with 8960 V7.5.0 Release 7 (2007-06) Ver.: v.02.18