

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

Acer Incorporated

Notebook Computer

N24B4; Aspire Lite 15; AL15-41P; AL15-42P; GW15-41P

FCC ID: HLZGW1541P

Brand : acer; Gateway

Prepared for : Acer Incorporated
8F., No.88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City
221 Taiwan

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F25003
Date of Test : Nov.26~Dec.30, 2024
Date of Report : Jan.09, 2025

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	5
1.1. Description of Standards and Results	5
2. GENERAL INFORMATION	6
2.1. Description of Equipment Under Test	6
2.2. Feature of Equipment Under Test	7
2.3. Tested Supporting System Details	8
2.4. Block diagram of connection between the EUT and simulators	9
2.5. Test Equipments	10
2.6. Test Information	11
2.7. Test Facility	12
2.8. Measurement Uncertainty (95% confidence levels, k=2)	12
3. POWER LINE CONDUCTED EMISSION TEST	13
3.1. Block Diagram of Test Setup	13
3.2. Power Line Conducted Emission Test Limits	13
3.3. Configuration of EUT on Test	13
3.4. Operating Condition of EUT	14
3.5. Test Procedure	14
3.6. Power Line Conducted Emission Test Results	14
4. RADIATED EMISSION TEST	17
4.1. Block Diagram of Test Setup	17
4.2. Radiated Emission Limits	18
4.3. EUT Configuration on Test	18
4.4. Operating Condition of EUT	19
4.5. Test Procedure	19
4.6. Radiated Emission Test Results	19
5. CONDUCTED SPURIOUS EMISSIONS	172
5.1. Limit	172
5.2. Test Procedure	172
5.3. Test result	172
6. BAND EDGE COMPLIANCE TEST	209
6.1. Limit	209
6.2. Test Procedure	209
6.3. Test Results	209
7. 6dB & 99% Bandwidth Test	275
7.1. Limit	275
7.2. Test Procedure	275
7.3. Test Results	276
8. OUTPUT POWER TEST	290
8.1. Limit (FCC Part 15C 15.247 b(3))	290
8.2. Test Procedure	290
8.3. Test Results	291
9. POWER SPECTRAL DENSITY TEST	303
9.1. Limit	303
9.2. Test Procedure	303
9.3. Test Results	304

10. ANTENNA REQUIREMENT312

10.1. Standard Applicable 312

10.2. Antenna Connected Construction 312

11. DEVIATION TO TEST SPECIFICATIONS313

Appendix A. Photograph of Test

Appendix B. Photo of the EUT

TEST REPORT

Applicant : Acer Incorporated
Manufacturer : Acer Incorporated
Product : Notebook Computer
FCC ID : HLZGW1541P

(A) Model No. : N24B4; Aspire Lite 15; AL15-41P; AL15-42P;
GW15-41P
(B) Brand : acer; Gateway
(C) Test Voltage : AC 120V/60Hz

Tested for comply with:
FCC CFR 47 Part 15 Subpart C

Test procedure used:
ANSI C63.10:2020+Cor1:2023
KDB 558074 D01v05

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC and IC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to single evaluation of one sample of above mentioned product and shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U. S. Government.

Date of Test : Nov.26~Dec.30, 2024 Date of Report: Jan.09, 2025

Prepared by : April Zeng Reviewed by : Thomas Chen
April Zeng / Assistant Thomas Chen / Assistant Manager



Approved & Authorized Signer : Signature: Sunny Lu
Sunny Lu / Manager

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT has been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207	PASS
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.205	PASS
Band Edge Compliance	FCC Part 15: 15.247(d)	PASS
Conducted spurious emissions	FCC Part 15: 15.247(d)	PASS
6dB Bandwidth	FCC Part 15: 15.247(a)(2)	PASS
Peak Output Power	FCC Part 15: 15.247(b)(3)	PASS
Power Spectral Density	FCC Part 15: 15.247(e)	PASS
Antenna requirement	FCC Part 15: 15.203	PASS
Note 1: Measurement uncertainty affection to the result is not considered, the EUT is technically compliant with standard requirements.		
Note 2: This device support MIMO & SISO, after evaluated output power, we found that MIMO power is larger than SISO, so the other test items are reported with MIMO mode.		

2. GENERAL INFORMATION

2.1. Description of Equipment Under Test

Applicant	Acer Incorporated
Applicant Address	8F., No.88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221 Taiwan
Manufacturer	Acer Incorporated
Manufacturer Address	8F., No.88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221 Taiwan
Product	Notebook Computer
Model No.	N24B4; Aspire Lite 15; AL15-41P; AL15-42P; GW15-41P Model Difference declared by applicant: marketing purpose or color deviation
Test Model	N24B4
Brand	acer; Gateway
FCC ID	HLZGW1541P
Sample Type	Prototype production
Date of Receipt	Nov.19, 2024
Date of Test	Nov.26~Dec.30, 2024
Remark: This report only for WIFI 2.4GHz.	


2.2.Feature of Equipment Under Test

Product Feature & Specification		
Product	Notebook Computer	
Model No.	N24B4	
Power Source	☒ Commercial Power	AC 100-240V,50-60Hz ,1.6A
	☒ External Power Source	DC 5V 3A/ DC 9V 3A/ DC 12V 3A/ DC 15V 3A/ DC 20V 3.25A
	☐ Lithium battery	DC V, mAh
	☐ UM battery	DC V
2.4GHz Wi-Fi		
Support Modes	802.11b/g/n20/ n40/ax20/ ax40	
Frequency Range	2412-2462MHz	
Type of Modulation	802.11b(DSSS): CCK, QPSK, BPSK; 802.11g/n(OFDM): 64QAM,16QAM, QPSK, BPSK 802.11ax(OFDM): 64QAM,16QAM, QPSK, BPSK, 1024QAM	
Data Rate	802.11b: 1/2/5.5/11 Mbps; 802.11g: 6/9/12/18/24/36/48/54 Mbps; 802.11n: up to 300Mbps 802.11ax: up to 574Mbps	
Channel Separation	5MHz	
Antenna System		
Type of Antenna	FPC Antenna	
Antenna Number	2 (ANT0 and ANT1)	
Operation Modes	SISO and MIMO mode supported(11a & 11g supports SISO mode only)	
Antenna Peak Gain	WIFI 2.4G Band Peak Gain: Ant0:.3.63dBi; Ant1:2.93dBi	
Remark: This report is for WiFi 2.4GHz radio specification only. EUT also supports other radio specification as below listed: BDR+EDR (Test report No. ACS-F25001) BLE (Test report No. ACS-F25002) WiFi 2.4GHz (Test report No. ACS-F25003) WiFi 5GHz (Test report No. ACS-F25004) SAR (Test report No. ACS-SF25001) DFS (Test report No. ACS-F25008)		

2.3. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number
1.	Monitor	---	ASUS	PB287	---
		HDMI Cable: Shielded, Detachable, 1.8m Power Cord: Unshielded, Detachable, 1.8m			
2.	HDD#1	ACS-EMC-HDD42	WD	WD Elements	WXA1A7396898
		Data Cable: Shielded, Detachable, 0.4m			
3.	HDD#2	ACS-EMC-HDD43	WD	WD Elements	WX31E63TU717
		Data Cable: Shielded, Detachable, 0.4m			
4.	HDD#3	ACS-EMC-HDD34	WD	WD Elements	WCAV4302542
		Data Cable: Shielded, Detachable, 0.4m			
5.	Headphone	ACS-EMC-EP01	OVANN	0V-T880V	---
		Data Cable: Shielded, Detachable, 4.0m			
6.	Notebook	N/A	ACER	ZOW	N/A
		Power Cord(3C): Unshielded, Detachabled, 1.8m Power Adapter: Manufacturer: Lite-On, M/N: PA-1900-32 Data Cable: Shielded, Undetectable, 4.0m(Bond one ferrite core)			

2.4. Block diagram of connection between the EUT and simulators for power line conducted emission and radiated emission test:

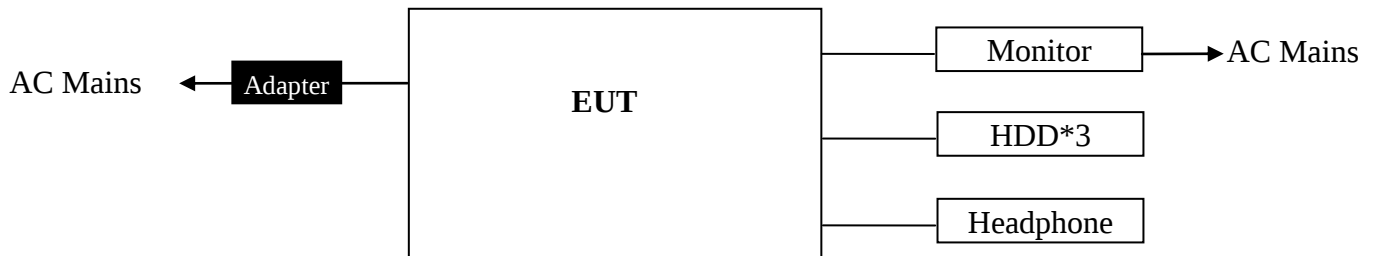

for the other test items:



(EUT: Notebook Computer)

2.5.Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1# Shielding Room(SE)	AUDIX	N/A	N/A	Nov.09,22	3 Year
2.	3m Chamber(NSA)	AUDIX	N/A	N/A	Aug.11,22	3Year
3.	3m Chamber(SE)	AUDIX	N/A	N/A	Sep.16,22	3 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESCI	100842	Mar.16,24	1 Year
5.	Signal Analyzer	Rohde & Schwarz	FSV40	101608	Nov.07,24	1 Year
6.	L.I.S.N.#1	Rohde & Schwarz	ENV216	102160	Jun.19,24	1 Year
7.	RF Cable	Eastsheep	RG223	190424	Sep.13,24	1Year
8.	Tri-log-Broadband Antenna	SCHWARZBECK	VULB 9168	01313	Sep.26,24	1 Year
9.	NSA Cable	HUBER+SUHNER	CFD400NL-LW	No.3+190411	Sep.13,24	1 Year
10.	Coaxial Switch	Anritsu	MP59B	6201397223	Mar.17,24	1 Year
11.	RF Cable	TIMES MICROWAVE	SFT205-NMSM-10.00M	689241	Aug.13,24	1 Year
12.	EMI Test Receiver	Rohde & Schwarz	ESR3	101931	Mar.17,24	1 Year
13.	Amplifier	EMCI	EMC0518A45SE	980965	Aug.13,24	1 Year
14.	Amplifier	KEYSIGHT	83017A	39500711	Mar.16,24	1 Year
15.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Mar.16,24	1 Year
16.	RF Cable	HUBER+SUHNER	SUCOFLEX-106	190423	Mar.16,24	1 Year
17.	Attenuator(10dB)	eastsheep	2W-SMA-JK-6G-10dB	No. 4	Sep.15,24	1 Year
18.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Mar.17,24	1 Year
19.	Horn Antenna	ETC	MCTD 1209	DRH15F03006	Sep.08,24	1 Year

Note: N/A means Not applicable.

2.6.Test Information

A special test software (AX Series MP Toolkit) was used to control EUT work in Continuous TX mode(The duty cycle of the test signal is 100%), and select test channel, wireless mode and data rate.

Tested mode, channel, and data rate information			
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)
IEEE 802.11b	1	CH1	2412
	1	CH6	2437
	1	CH11	2462
IEEE 802.11g	6	CH1	2412
	6	CH6	2437
	6	CH11	2462
IEEE 802.11n HT20	MCS0	CH1	2412
	MCS0	CH6	2437
	MCS0	CH11	2462
IEEE 802.11n HT40	MCS0	CH3	2422
	MCS0	CH6	2437
	MCS0	CH9	2452
IEEE 802.11ax HE20	MCS0	CH1	2412
	MCS0	CH6	2437
	MCS0	CH11	2462
IEEE 802.11ax HE40	MCS0	CH3	2422
	MCS0	CH6	2437
	MCS0	CH9	2452
Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.			

2.7. Test Facility

Site Description

Name of Firm

: Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

EMC Lab.

: Certificated by ISED, Canada
Company Number: 5183A
CAB identifier: CN0034
Valid Date: Mar.31, 2025

: Accredited by NVLAP, USA
NVLAP Code: 200372-0
Valid Date: Mar.31, 2025


: Certificated by FCC, USA
Designation No: CN5022
Valid Date: Mar.31, 2025

2.8. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	2.6dB (150kHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	$\pm 3.8\text{dB}$ (30~200MHz, Polarization: H)
	$\pm 3.8\text{dB}$ (30~200MHz, Polarization: V)
	$\pm 4.0\text{dB}$ (200M~1GHz, Polarization: H)
	$\pm 4.0\text{dB}$ (200M~1GHz, Polarization: V)
Uncertainty for Radiation Emission test in 3m chamber(1GHz-25GHz)	$\pm 4.0\text{dB}$ (1~6GHz, Distance: 3m)
	$\pm 4.0\text{dB}$ (6~25GHz, Distance: 3m)
Uncertainty for S_{VSWR} in 3m chamber	$\pm 2.8\text{dB}$ (1~6GHz, Distance: 3m)
	$\pm 2.8\text{dB}$ (6~25GHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test in RF chamber	$\pm 3.7\text{dB}$ (30MHz~1000MHz)
	$\pm 3.3\text{dB}$ (1~26.5GHz)
Uncertainty for Conduction Spurious emission test	$\pm 2.0\text{dB}$
Uncertainty for Output power test	$\pm 0.8\text{dB}$
Uncertainty for Bandwidth test	$\pm 83\text{kHz}$
Uncertainty for DC power test	$\pm 1\%$
Uncertainty for test site temperature and humidity	$\pm 0.6^{\circ}\text{C}$
	$\pm 3\%$

3. POWER LINE CONDUCTED EMISSION TEST

3.1. Block Diagram of Test Setup

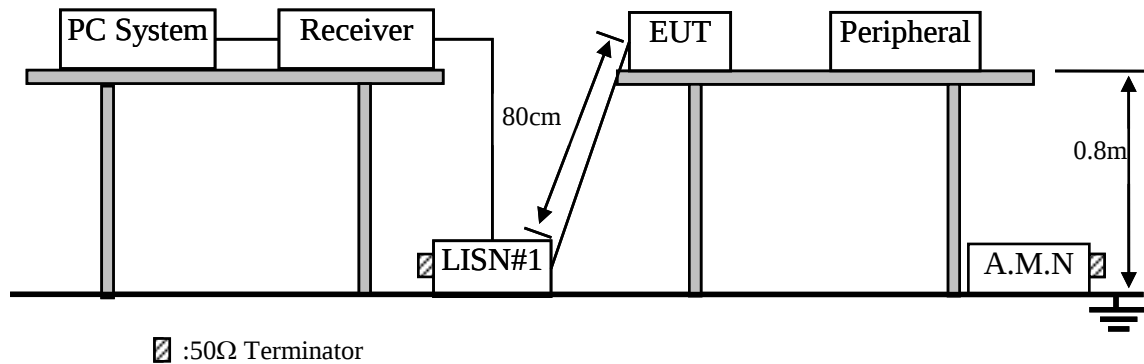

3.2. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limits shall apply at the transition frequencies.

3. Emission Level (dBμV) = Factor (L.I.S.N.) (dB) + Cable Loss (dB) + Reading (Receiver) (dBμV)

3.3. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.3.1. Notebook Computer (EUT)

Model No. : N24B4

Serial No. : N/A

3.3.2. Support Equipment: As Tested Supporting System Details, in Section 2.2.

3.4. Operating Condition of EUT

- 3.4.1. Setup the EUT as shown as Section 3.1.
- 3.4.2. Turn on the power of EUT.
- 3.4.3. PC run test software to control EUT work in Tx mode.

3.5. Test Procedure


The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via Adapter unit connected to the power mains through a line impedance stabilization network (L.I.S.N. #1). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.6. Power Line Conducted Emission Test Results


PASS. (All emissions not reported below are too low against the prescribed limits.)

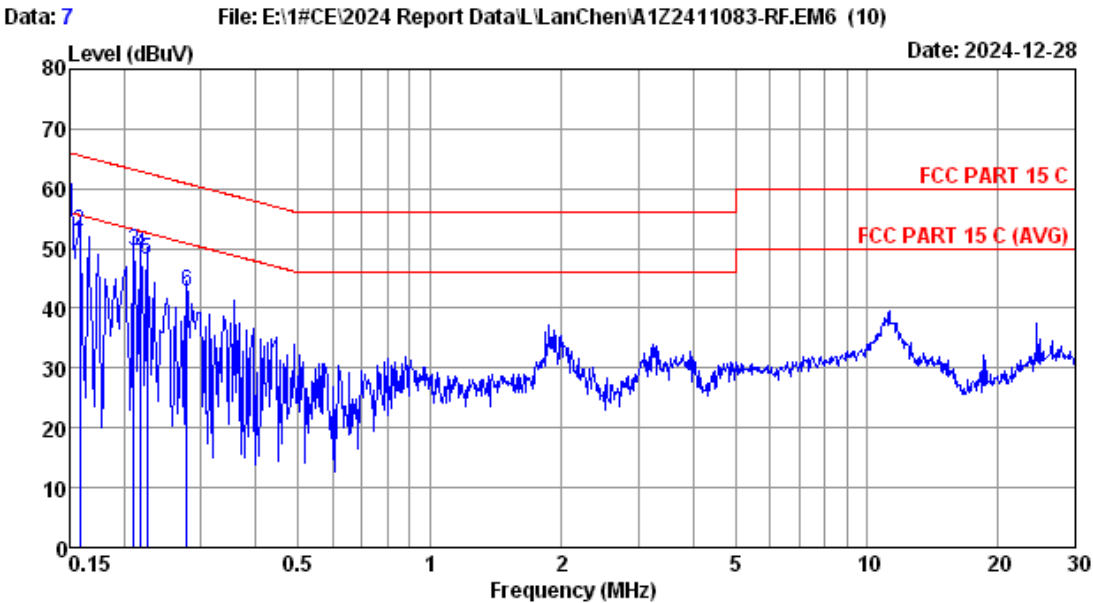

Site no :1# CE Data No :7
 Dis./Lisn :2024 ENV216-N
 Limit :FCC PART 15 C
 Env./Ins. :25.3°C/34% Engineer :Hongjie
 Power Rating :AC 120V/60Hz
 Test Mode :WIFI2.4G TX Mode

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.150	9.76	0.01	50.12	59.89	66.00	6.11	QP
2	0.158	9.76	0.01	43.17	52.94	65.56	12.62	QP
3	0.211	9.78	0.01	39.75	49.54	63.18	13.64	QP
4	0.219	9.78	0.01	39.22	49.01	62.88	13.87	QP
5	0.226	9.78	0.01	38.44	48.23	62.61	14.38	QP
6	0.277	9.78	0.01	32.90	42.69	60.90	18.21	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

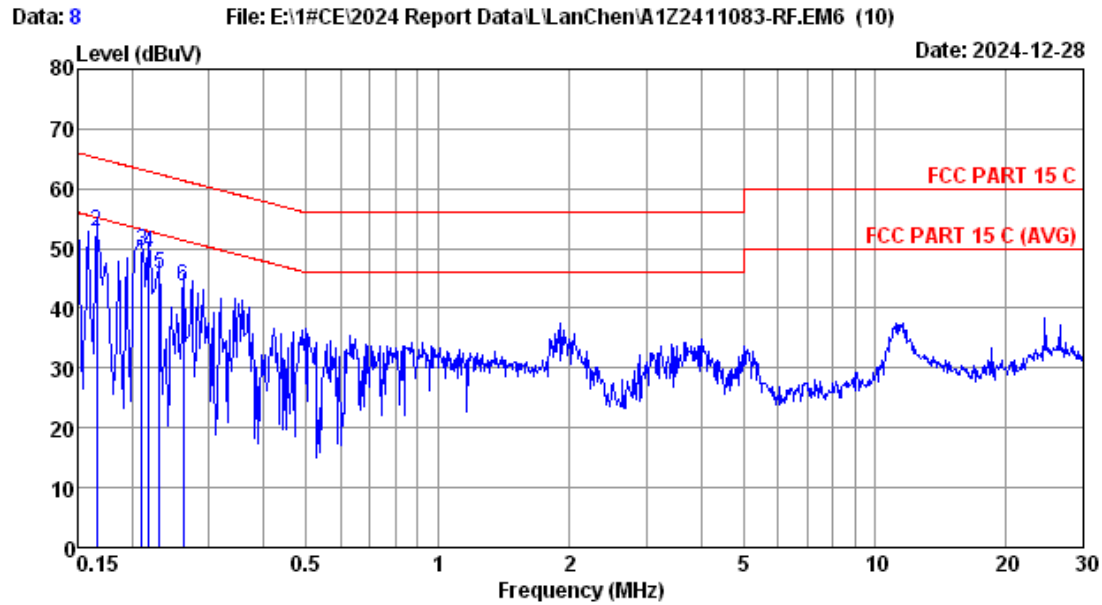

Site no :1# CE Data No :8
 Dis./Lisn :2024 ENV216-L
 Limit :FCC PART 15 C
 Env./Ins. :25.3°C/34% Engineer :Hongjie
 Power Rating :AC 120V/60Hz
 Test Mode :WIFI2.4G TX Mode


No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV)	Limits (dBUV)	Margin (dB)	Remark
1	0.150	9.77	0.01	42.64	52.42	66.00	13.58	QP
2	0.166	9.77	0.01	43.16	52.94	65.16	12.22	QP
3	0.211	9.76	0.01	39.70	49.47	63.18	13.71	QP
4	0.219	9.76	0.01	39.38	49.15	62.88	13.73	QP
5	0.230	9.76	0.01	35.92	45.69	62.44	16.75	QP
6	0.262	9.76	0.01	33.98	43.75	61.38	17.63	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


4. RADIATED EMISSION TEST

4.1. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

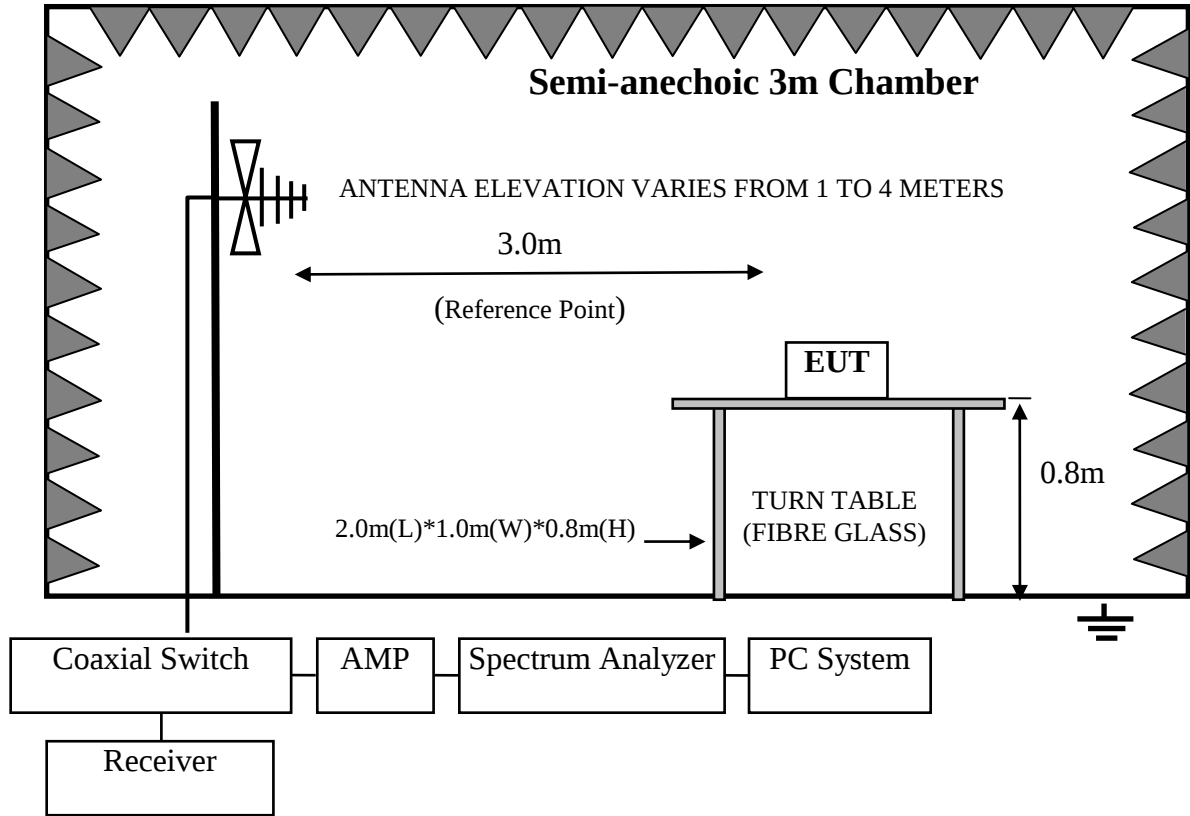

For frequency range 1GHz-25GHz

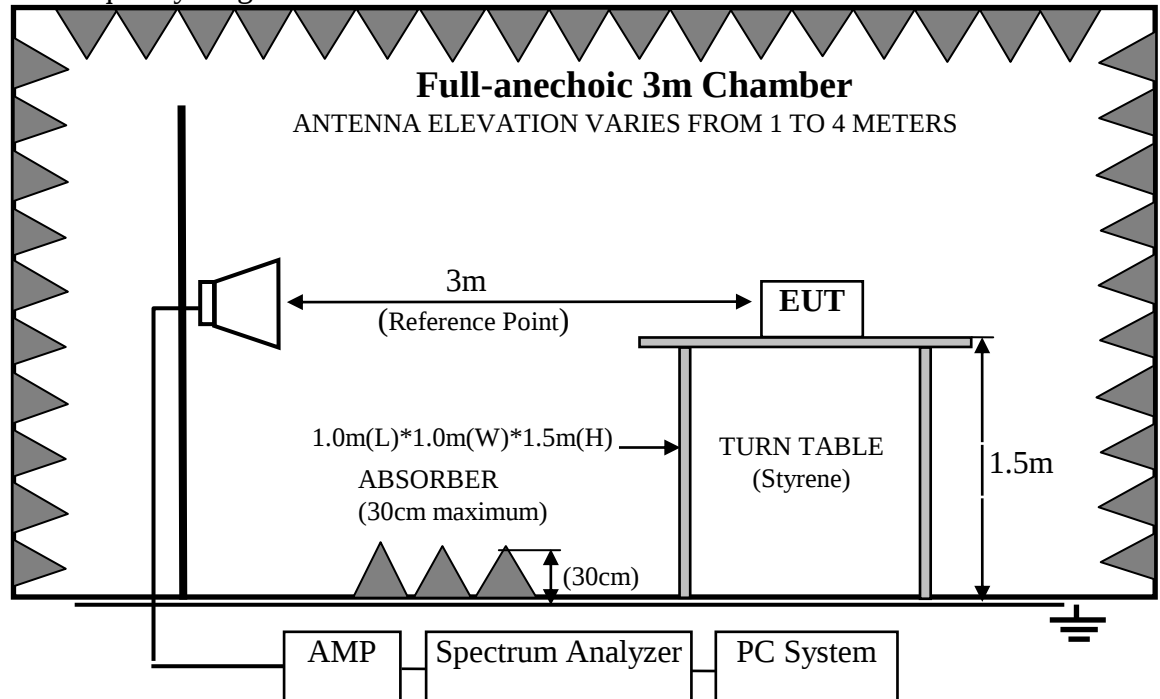

4.2. Radiated Emission Limits

4.2.1. 15.247&209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Remark : (1) Emission Level ($\text{dB}\mu\text{V/m}$) = Reading (Receiver) ($\text{dB}\mu\text{V}$) + Antenna Factor (dB/m) + Cable Loss (dB)

Emission Level ($\text{dB}\mu\text{V/m}$) = Reading (Spectrum) ($\text{dB}\mu\text{V}$) + Antenna Factor (dB/m) – Amp Factor (dB) + Cable Loss (dB) (above 1000MHz)

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.2.2. 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

4.3. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

4.3.1. Notebook Computer (EUT)

Model No. : N24B4

Serial No. : N/A

4.3.2. Support Equipment: As Tested Supporting System Details, in Section 2.3.

4.4. Operating Condition of EUT

- 4.4.1. Setup the EUT and simulator as shown as Section 4.1.
- 4.4.2. Turn on the power of all equipments.
- 4.4.3. Let EUT work in Tx(WiFi 2.4GHz) mode

4.5. Test Procedure

Frequency below 30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 regulation.

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)*2.4m(W)*0.3m(H) on the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna are set on test.

This test was performed with EUT in X, Y, Z position, and the worse case was found when EUT in X position as test photo indicated.

The bandwidth of the EMI test receiver (R&S ESR7) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25GHz, So the radiated emissions from 18GHz to 25GHz were not record.

4.6. Radiated Emission Test Results

PASS.

All the emissions from 30MHz to 25 GHz were comply with 15.209 limits.


Note 1: For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

Note 2: The emissions (9kHz~30MHz) not reported for there is no emission be found.

Duty cycle


ant 0

11 b

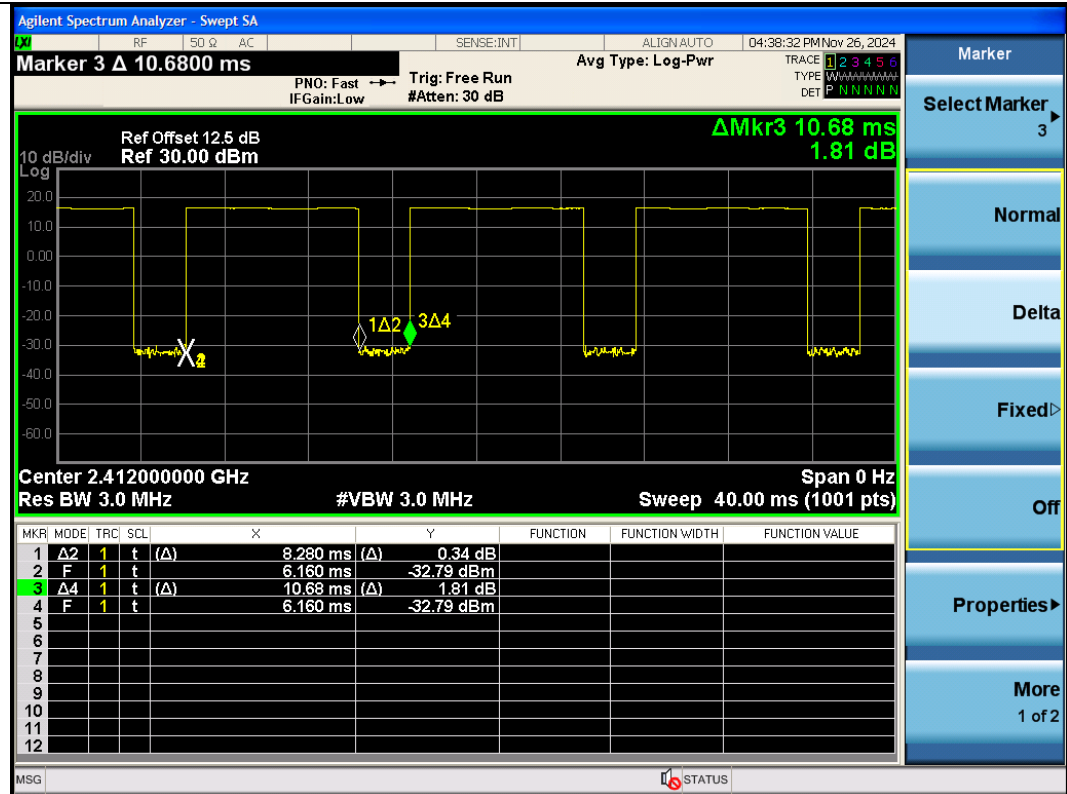


Note: The duty cycle = $\Delta 2 \div \Delta 4 = 0.775$.

11 g

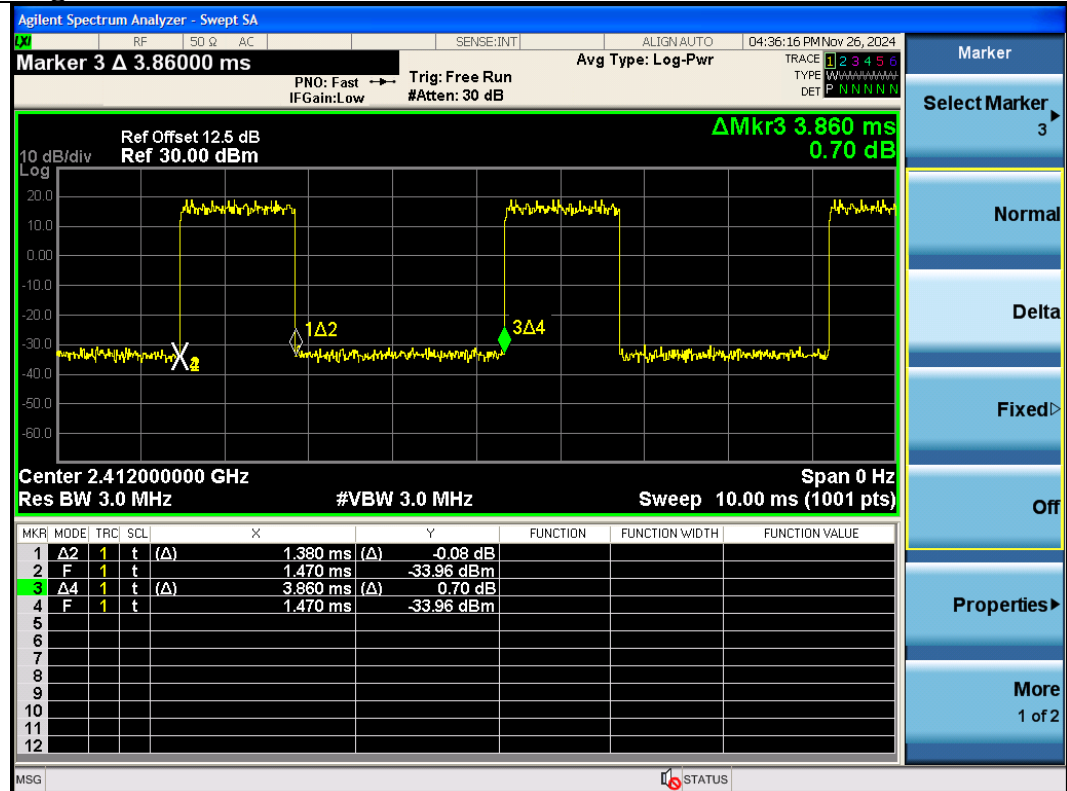


Note: The duty cycle = $\Delta 2 \div \Delta 4 = 0.357$.

11n HT20

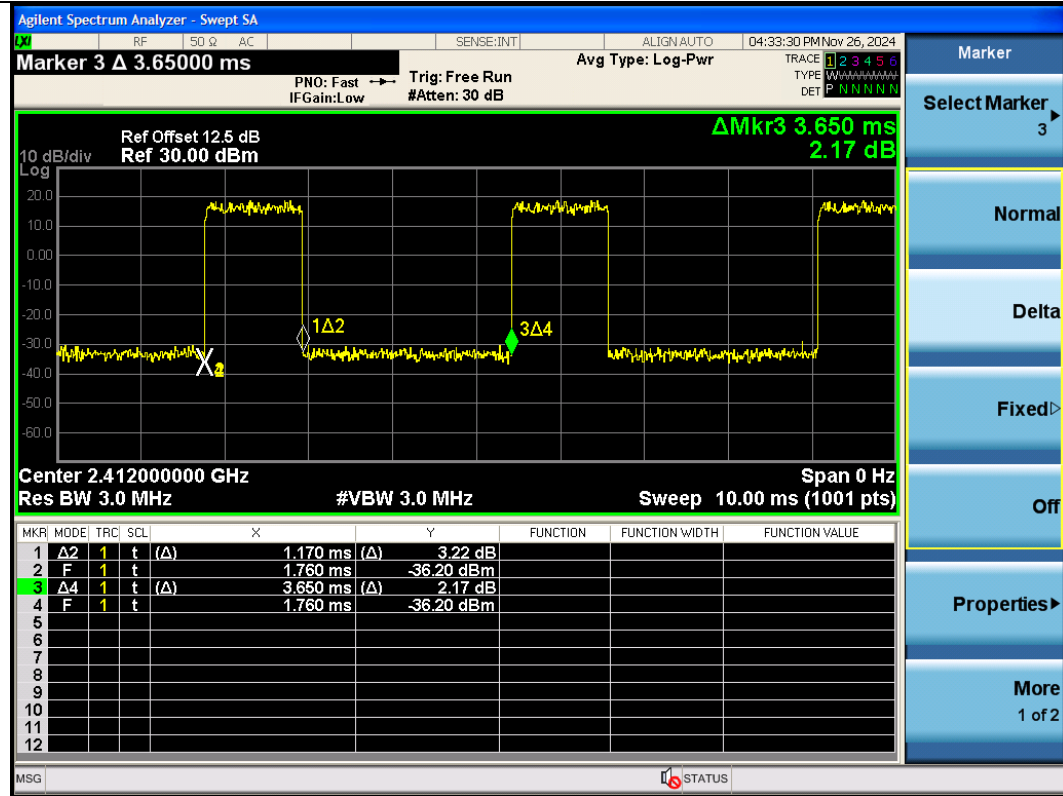


Note: The duty cycle = $\Delta 2 \div \Delta 4 = 0.320$.

11n HT40

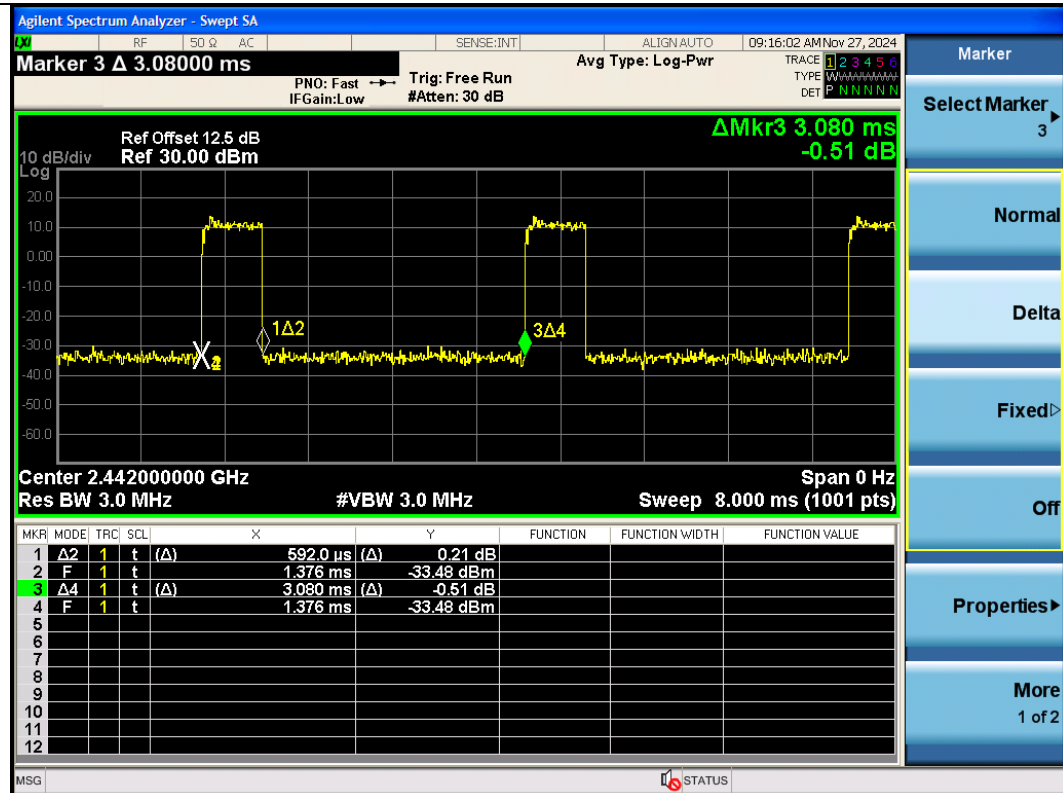


Note: The duty cycle = $\Delta 2 \div \Delta 4 = 0.192$.

11ax HE20

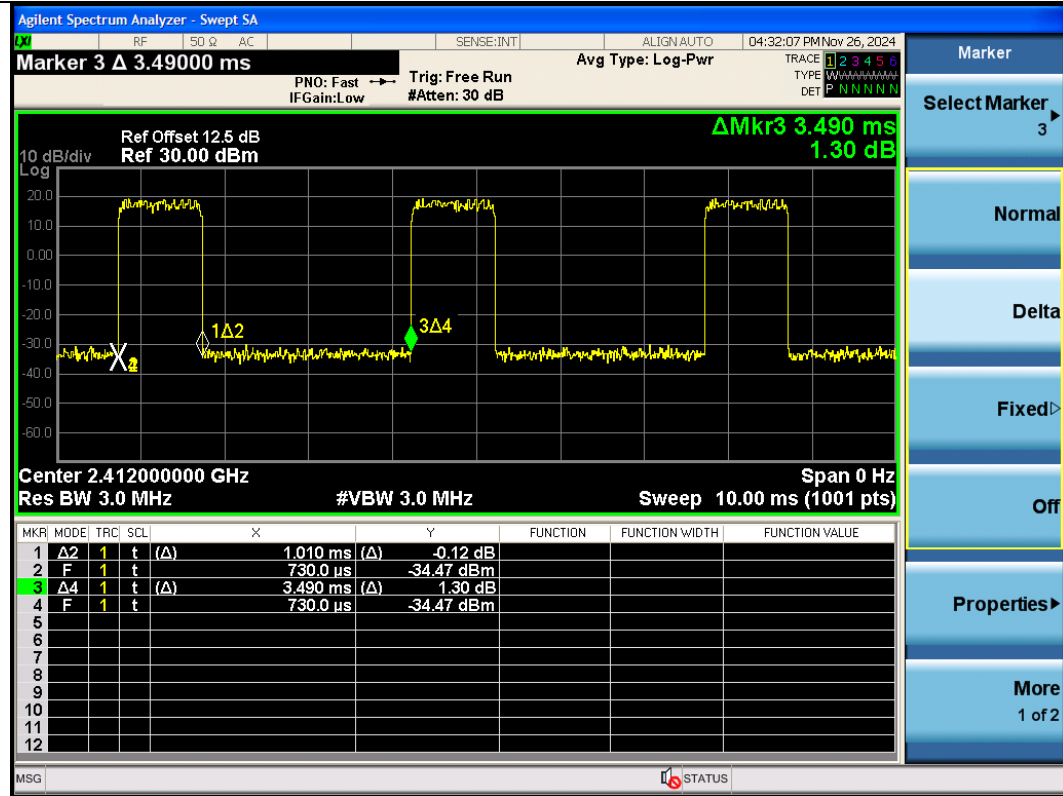

Note: The duty cycle = $\Delta 2 \div \Delta 4 = 0.289$.


11ax HE40

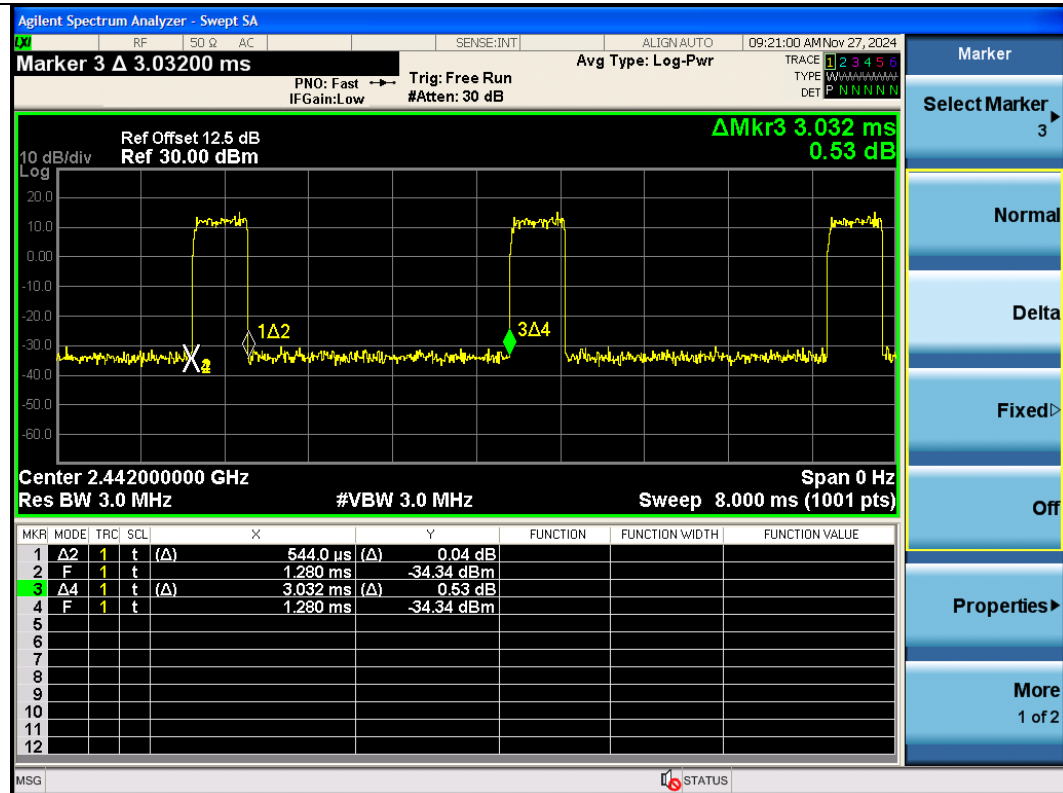

Note: The duty cycle = $\Delta 2 \div \Delta 4 = 0.179$.


ant 1

11 b

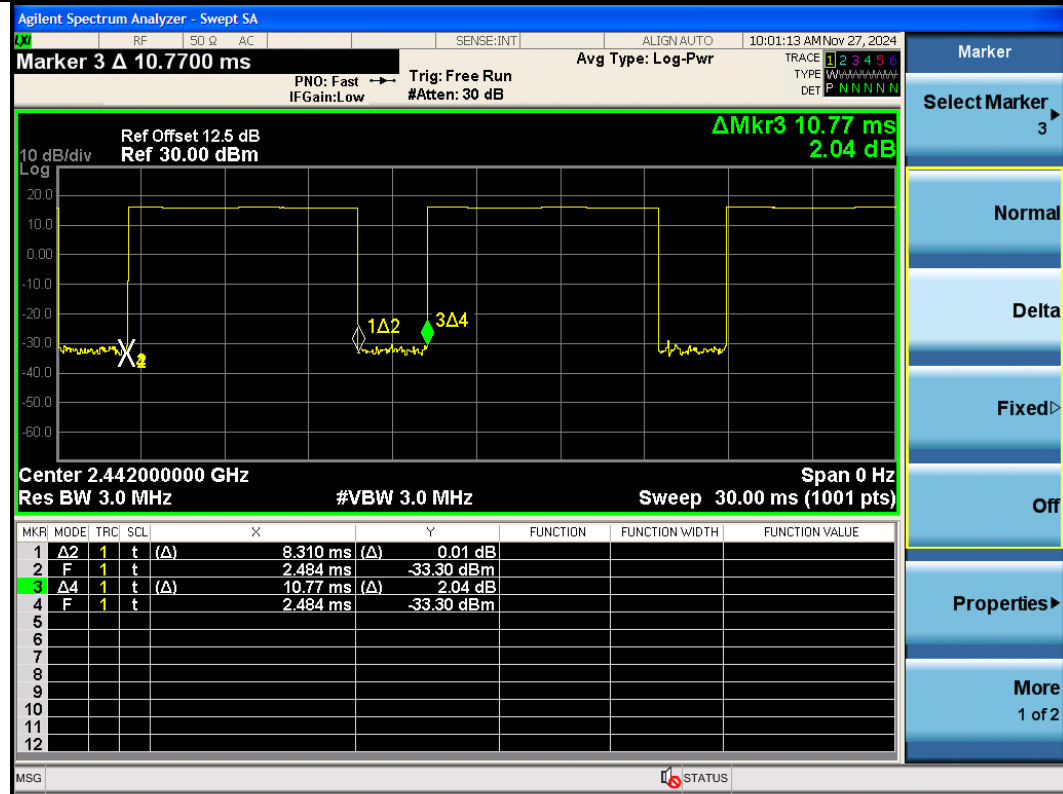


Note: The duty cycle = $\Delta 2 \div \Delta 4 = 0.771$.

11 g

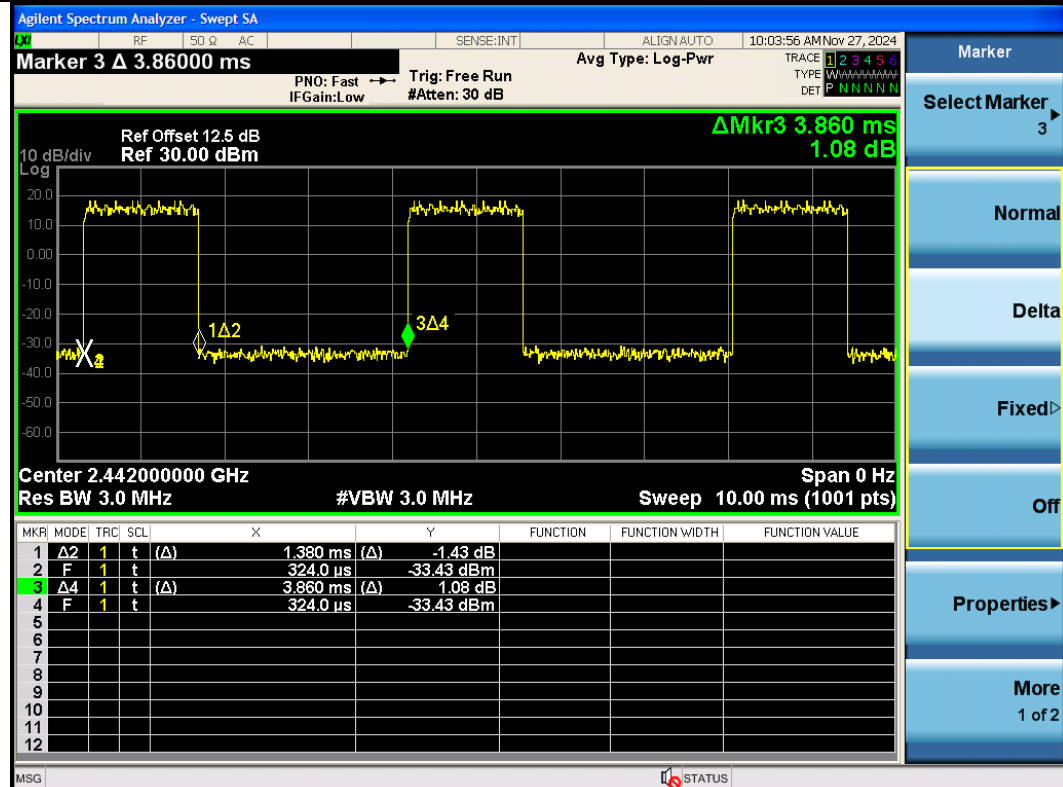


Note: The duty cycle = $\Delta 2 \div \Delta 4 = 0.357$.

11n HT20

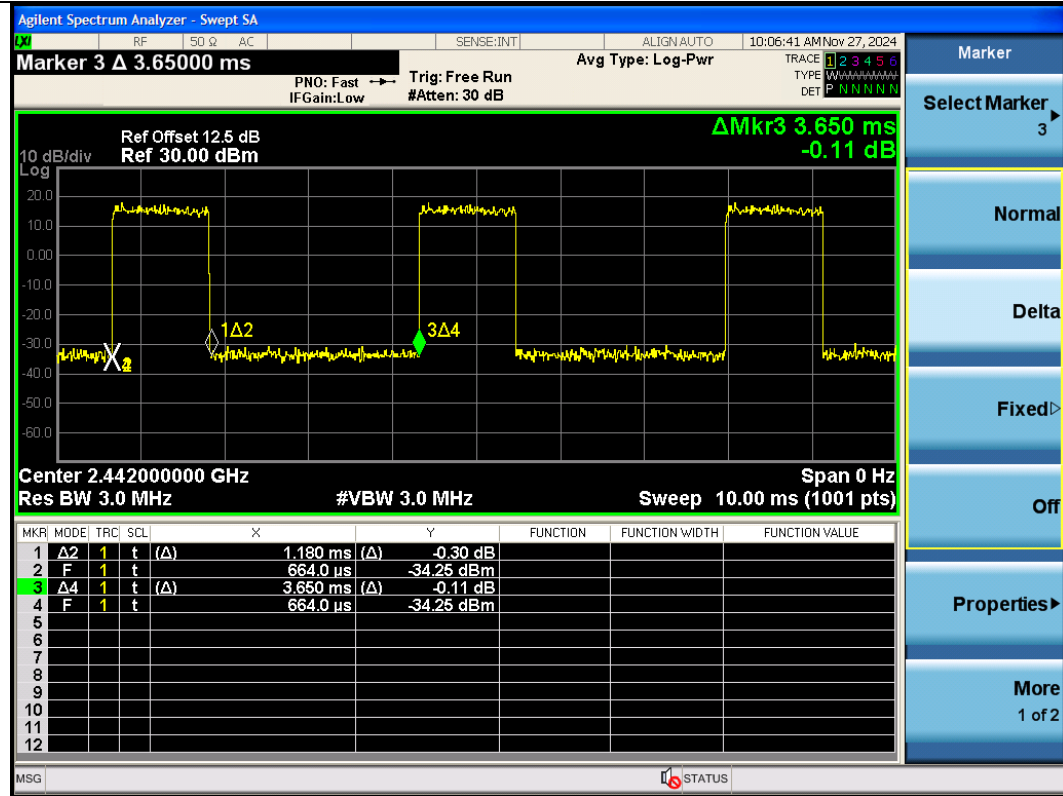


Note: The duty cycle = $\Delta 2 \div \Delta 4 = 0.323$.

11n HT40

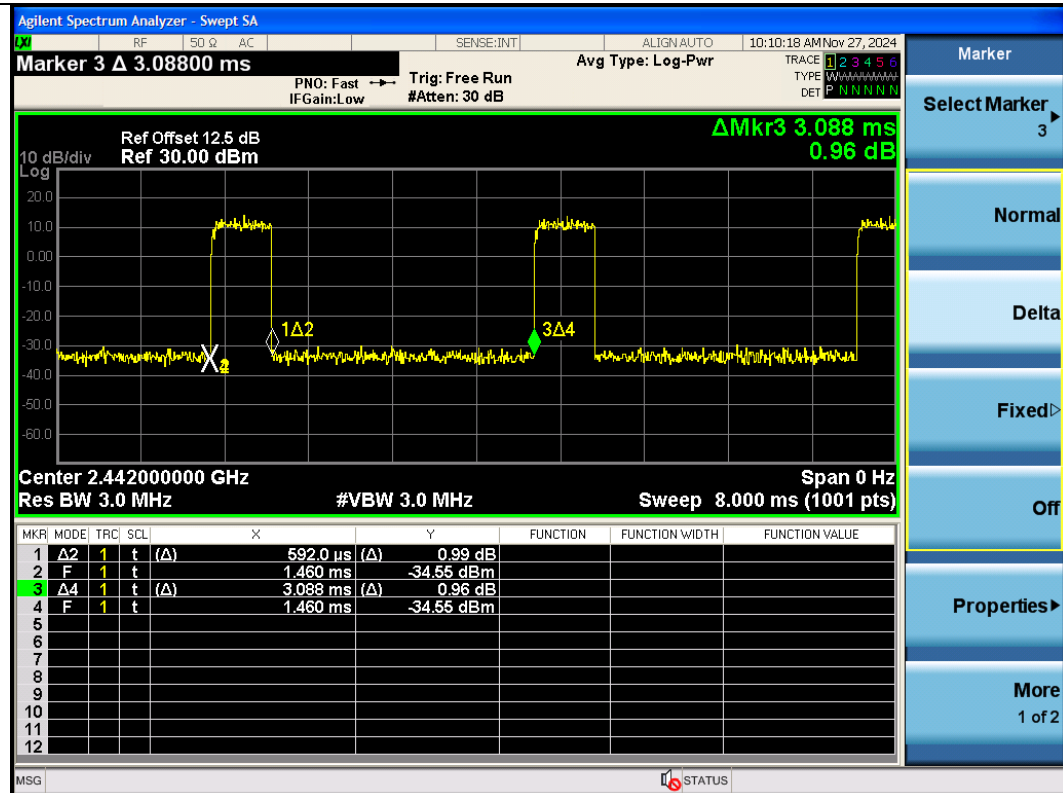


Note: The duty cycle = $\Delta 2 \div \Delta 4 = 0.191$.

11ax HE20

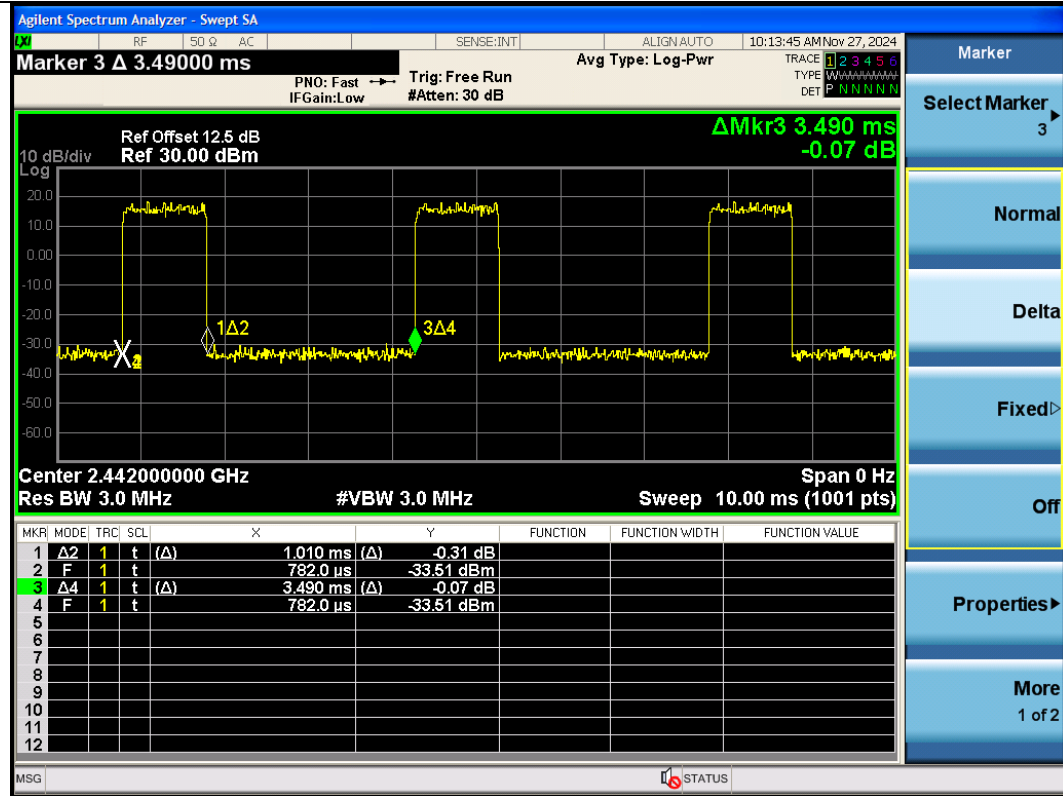

Note: The duty cycle = $\Delta 2 \div \Delta 4 = 0.289$.

11ax HE40

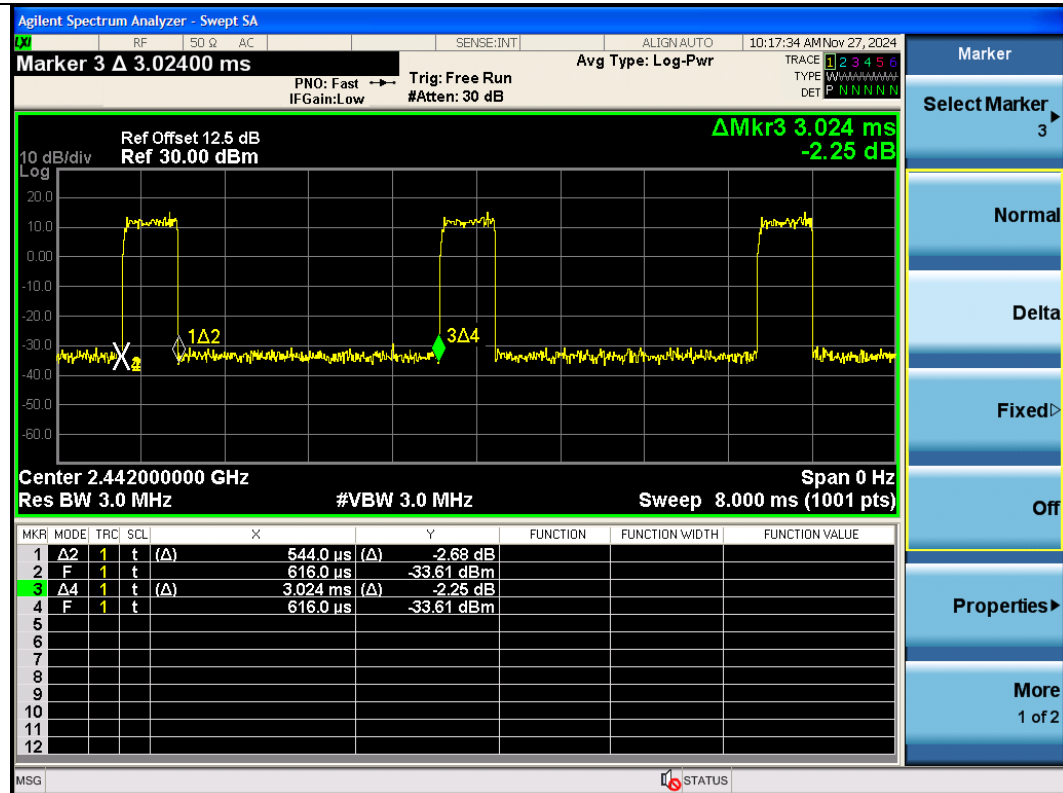


Note: The duty cycle = $\Delta 2 \div \Delta 4 = 0.179$.

Frequency: 30MHz~1GHz

Data: 7

File: E:\2024 Report Data\凌晨\A1Z2411083-RF.EM6 (10)

Date: 2024-12-28

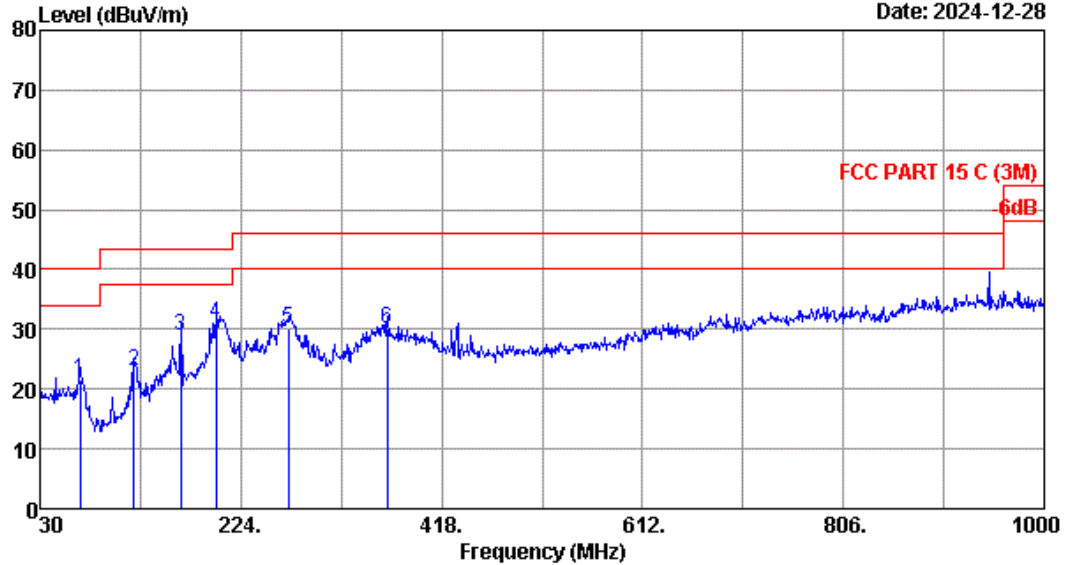


Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2024 VULB 9168-01313 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 23.8°C/53% Engineer : Abel

Power rating : AC 120V/60Hz
 Test Mode : WIFI 2.4G TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	68.800	17.64	0.95	3.04	21.63	40.00	18.37	QP
2	121.180	17.02	1.22	4.86	23.10	43.50	20.40	QP
3	165.800	19.02	1.44	8.53	28.99	43.50	14.51	QP
4	199.750	15.92	1.61	13.36	30.89	43.50	12.61	QP
5	269.590	18.28	1.98	9.81	30.07	46.00	15.93	QP
6	365.620	20.84	2.57	6.71	30.12	46.00	15.88	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

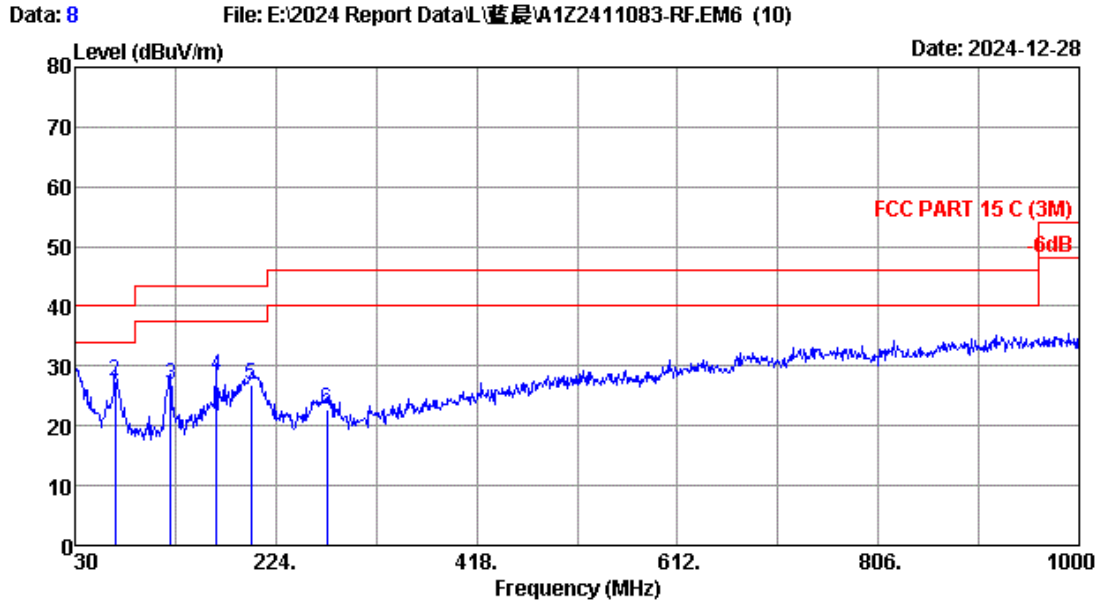


Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2024 VULB 9168-01313 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 23.8°C/53% Engineer : Abel

Power rating : AC 120V/60Hz
 Test Mode : WIFI 2.4G TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
				Reading (dBuV)	Level (dBuV/m)			
1	30.000	18.40	0.66	8.62	27.68	40.00	12.32	QP
2	68.800	17.64	0.95	8.76	27.35	40.00	12.65	QP
3	122.150	17.11	1.22	8.40	26.73	43.50	16.77	QP
4	166.770	18.92	1.44	7.94	28.30	43.50	15.20	QP
5	199.750	15.92	1.61	9.37	26.90	43.50	16.60	QP
6	273.470	18.65	2.00	2.02	22.67	46.00	23.33	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


Frequency: 1GHz~18GHz
SISO Mode ANT 0 11b

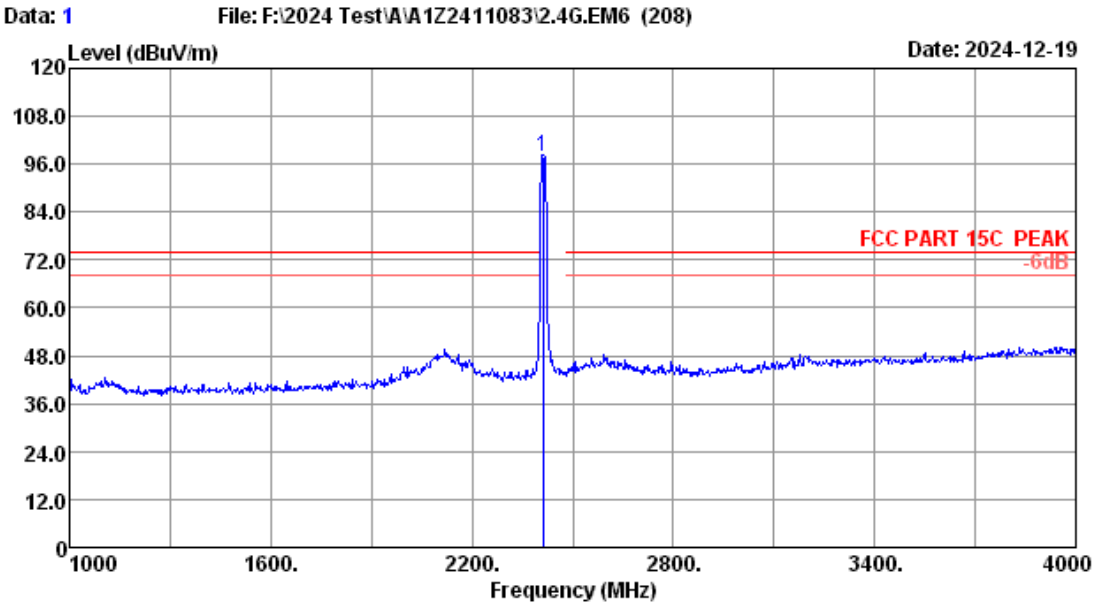


Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2412 TX mode SO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.70	5.23	96.77	31.69	98.01	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

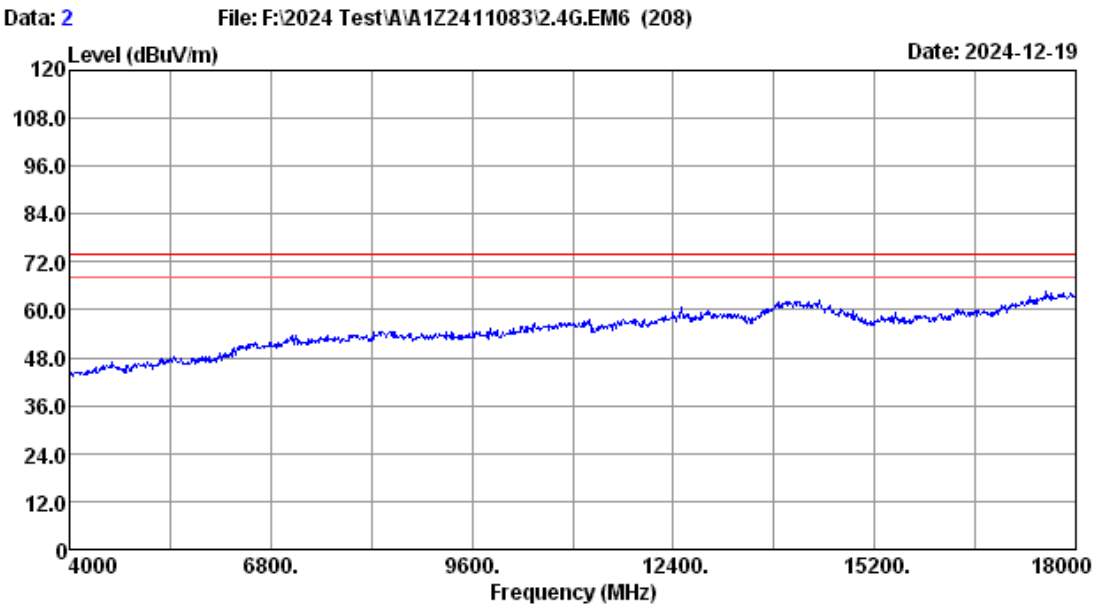

Site no.	: 3m Chamber	Data no.	: 2
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11b 2412 TX mode S0		

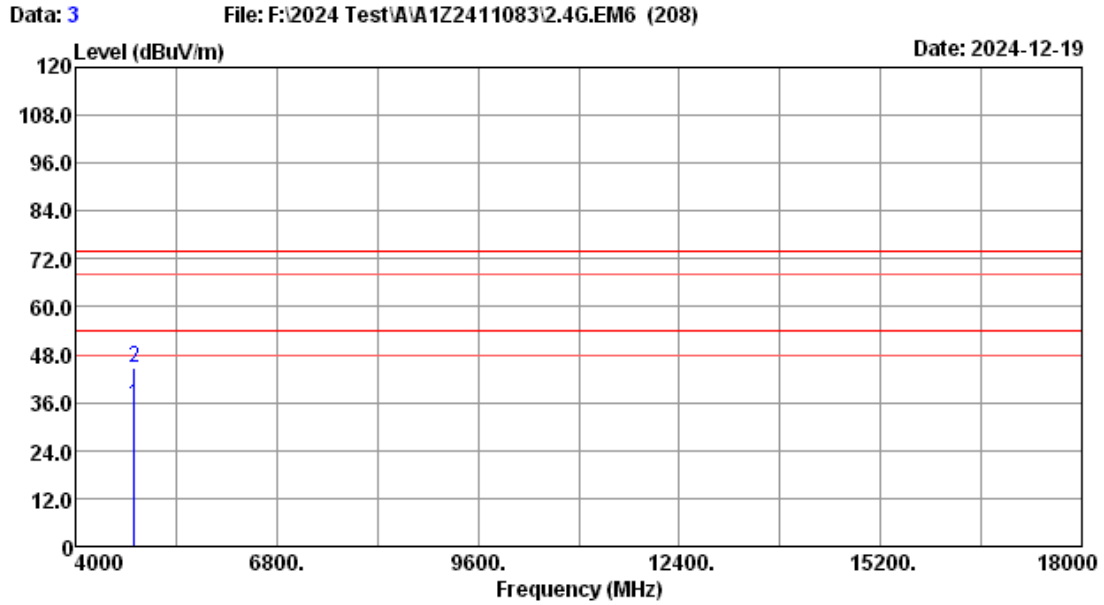


Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2412 TX mode S0

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.30	7.15	27.19	30.42	35.22	54.00	18.78	Average
2	4824.00	31.30	7.15	36.61	30.42	44.64	74.00	29.36	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.


FCC ID: HLZGW1541P

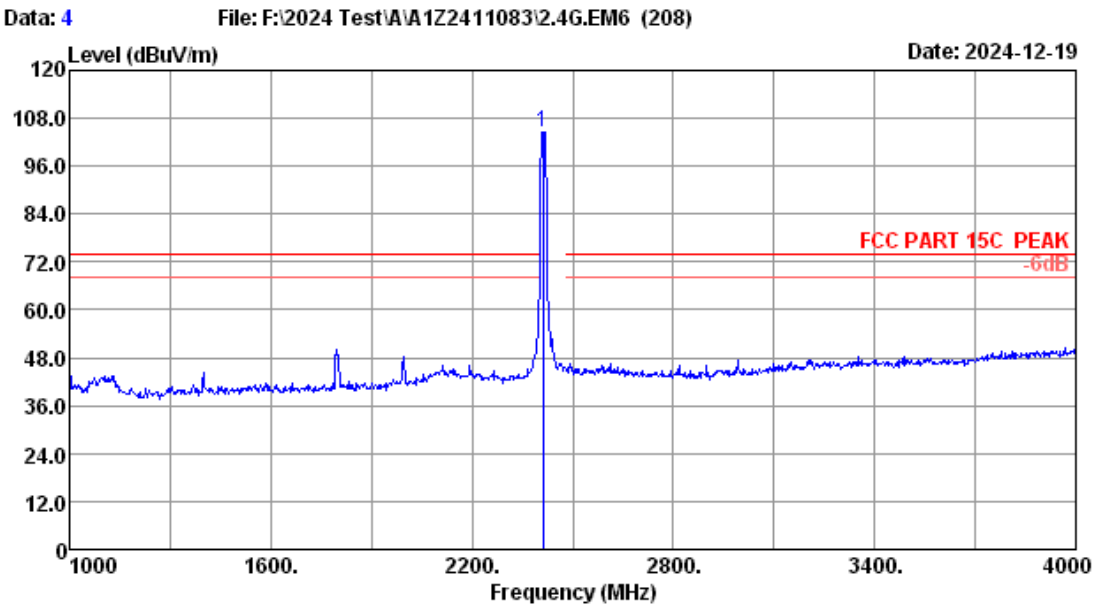


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2412 TX mode S0

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.70	5.23	103.36	31.69	104.60	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

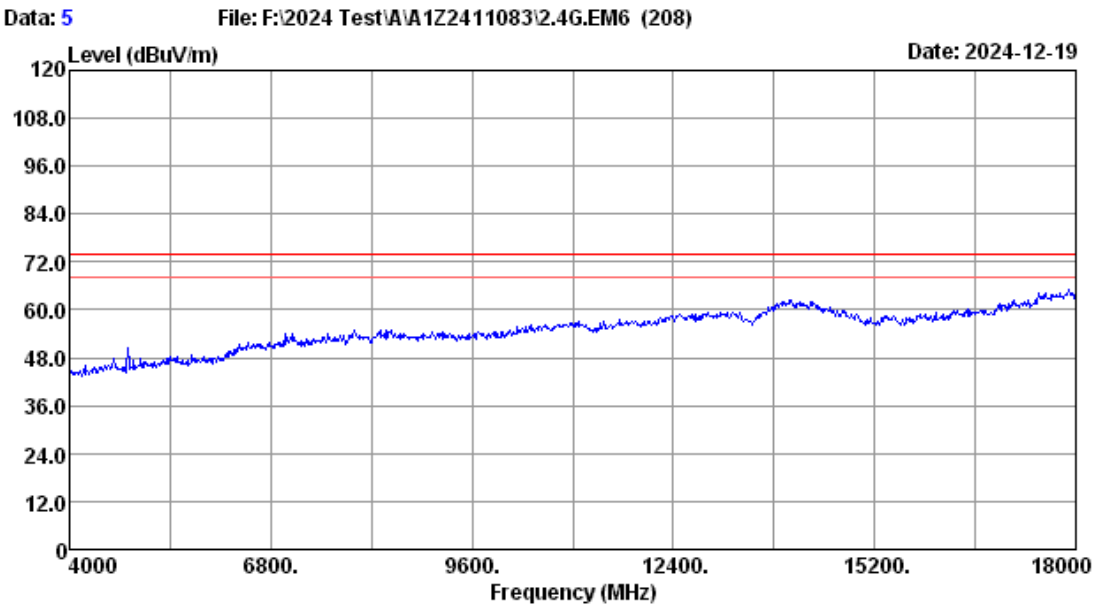


Site no.	: 3m Chamber	Data no.	: 5
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11b 2412 TX mode S0		

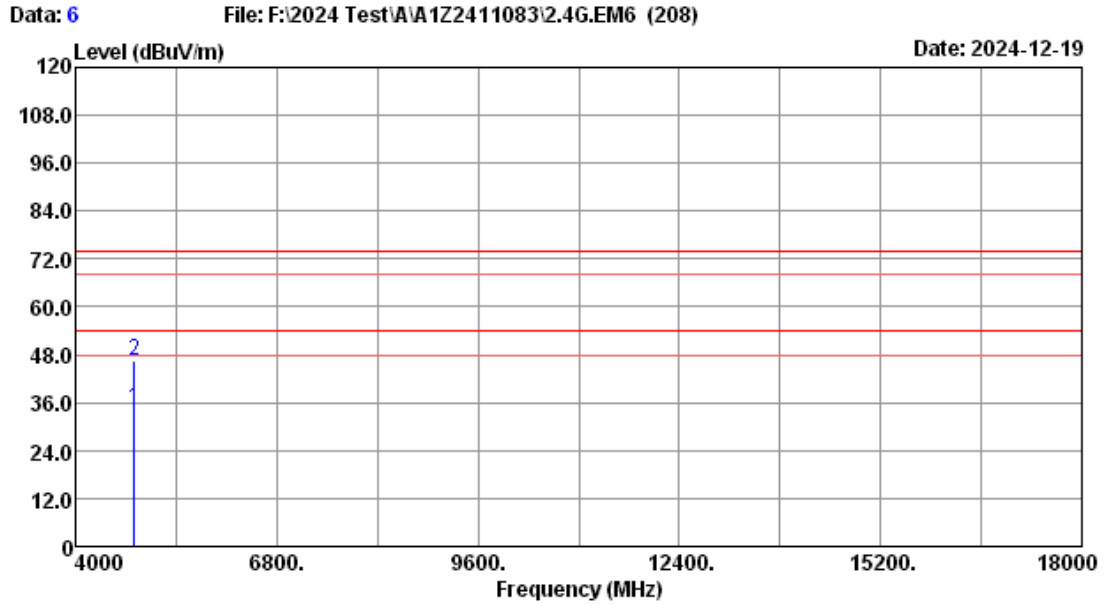

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2412 TX mode SO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.30	7.15	26.59	30.42	34.62	54.00	19.38	Average
2	4824.00	31.30	7.15	38.34	30.42	46.37	74.00	27.63	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

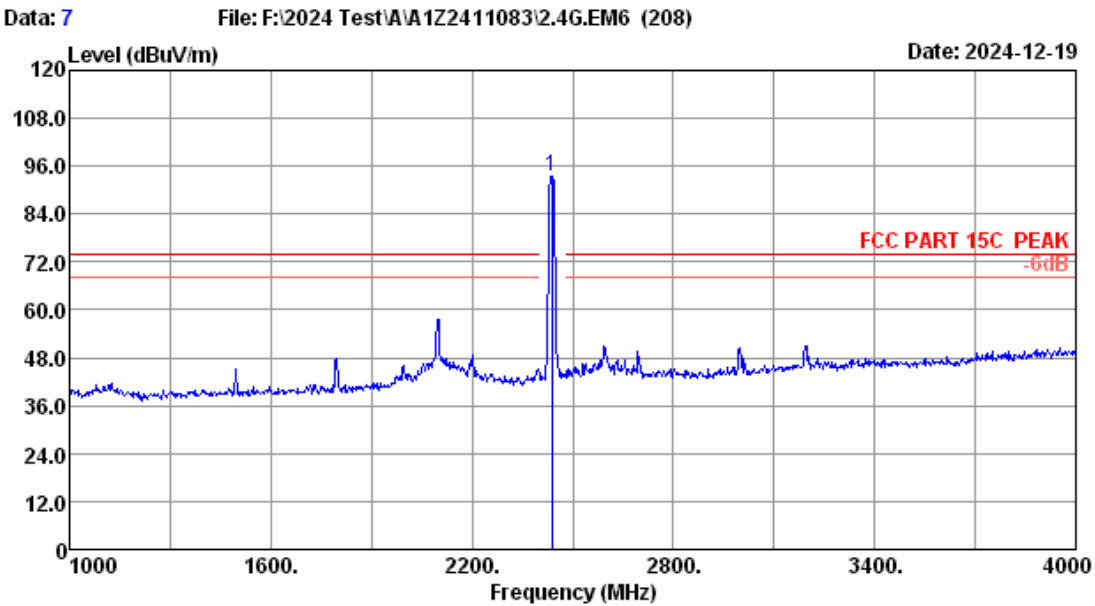


Site no. : 3m Chamber Data no. : 7
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.2°C/52.5% Engineer : Evan
Power rating :
Test Mode : 2.4G 11b 2437 TX mode S0

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.70	5.25	92.24	31.68	93.51	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

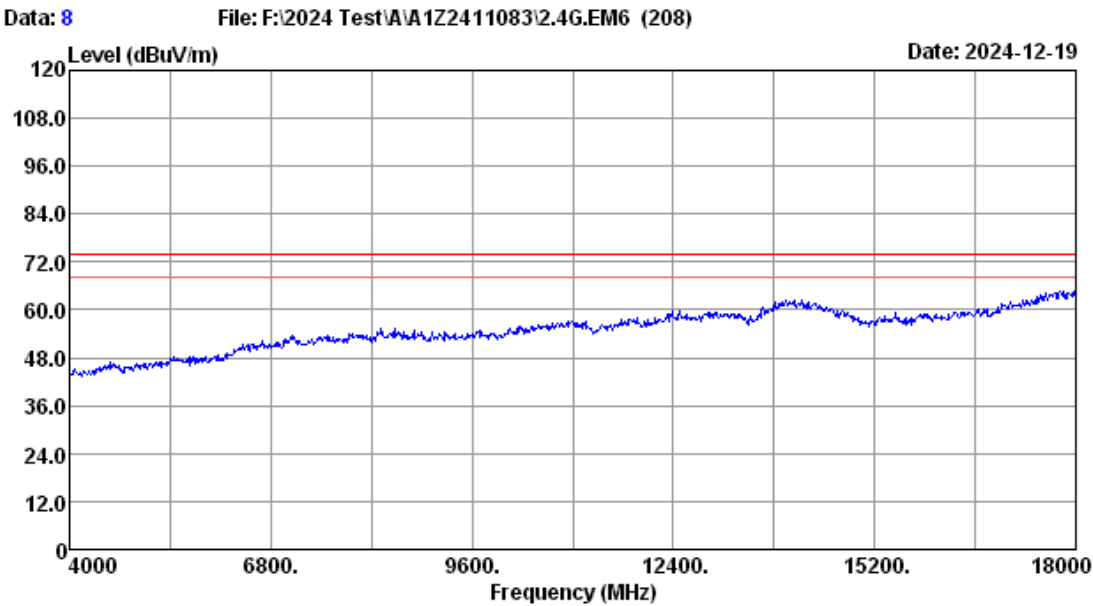

Site no.	: 3m Chamber	Data no.	: 8
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11b 2437 TX mode S0		

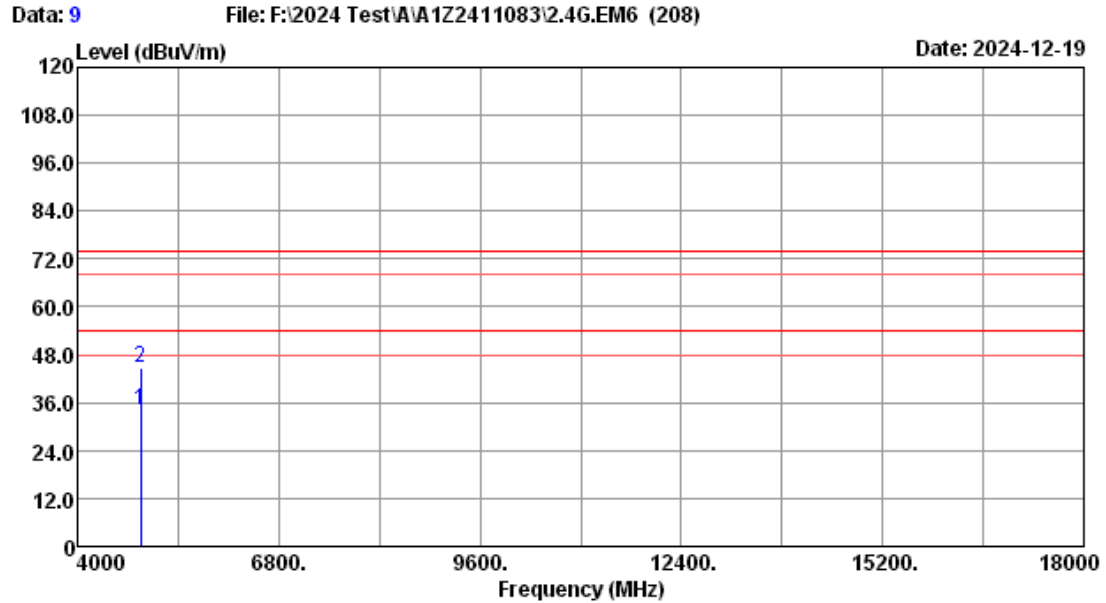


Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2437 TX mode S0

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.35	7.18	26.18	30.41	34.30	54.00	19.70	Average
2	4874.00	31.35	7.18	36.74	30.41	44.86	74.00	29.14	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.


FCC ID: HLZGW1541P

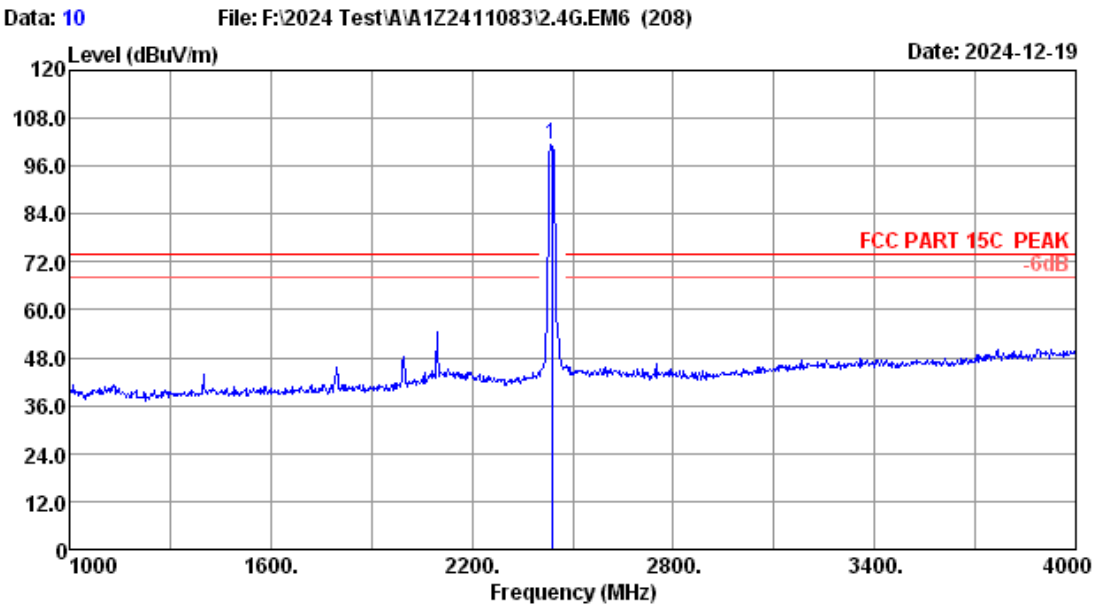


Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2437 TX mode S0

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.70	5.25	99.92	31.68	101.19	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

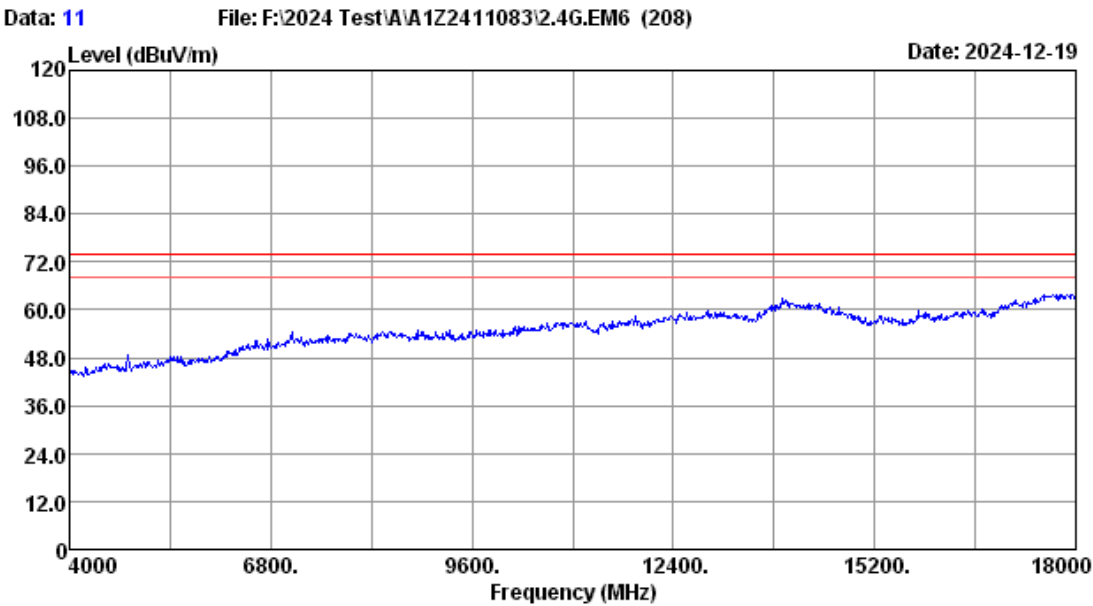


Site no.	: 3m Chamber	Data no.	: 11
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11b 2437 TX mode S0		

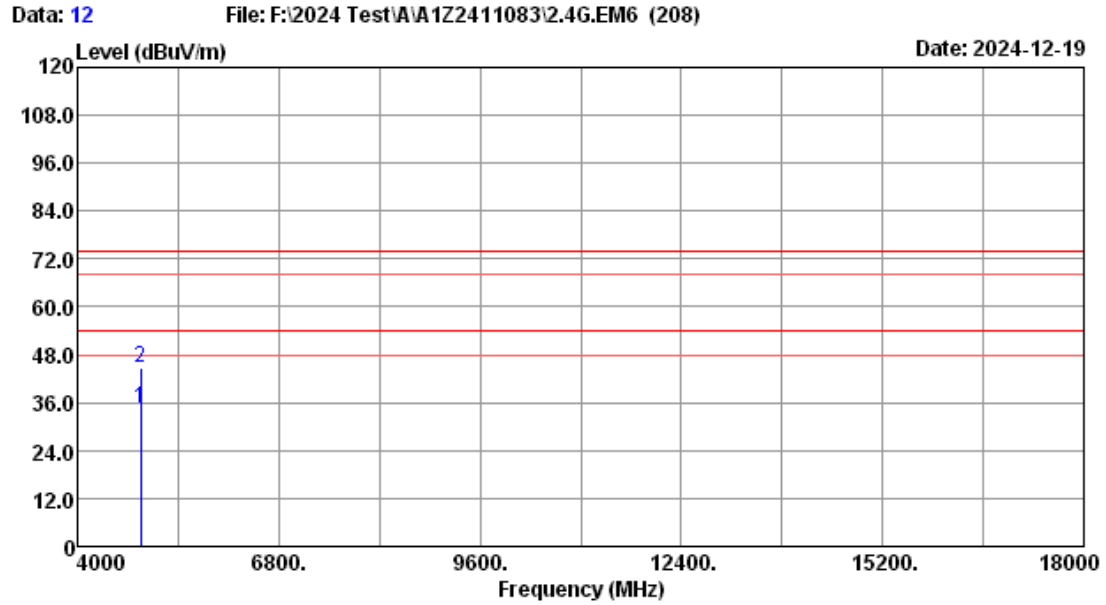

Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2437 TX mode S0

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.35	7.18	26.48	30.41	34.60	54.00	19.40	Average
2	4874.00	31.35	7.18	36.45	30.41	44.57	74.00	29.43	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

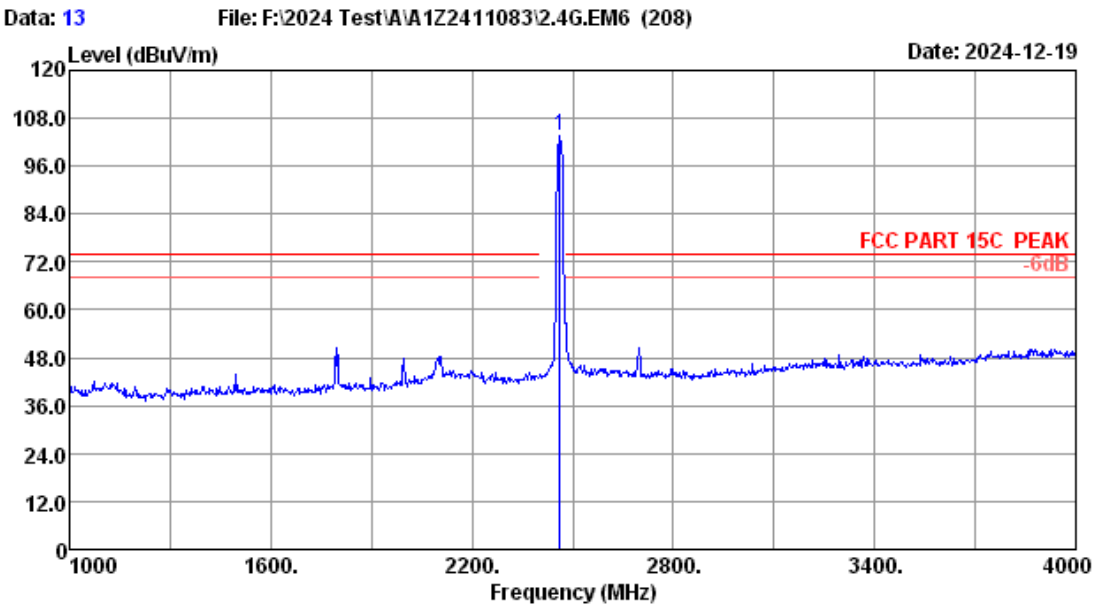


Site no. : 3m Chamber Data no. : 13
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.2°C/52.5% Engineer : Evan
Power rating :
Test Mode : 2.4G 11b 2462 TX mode S0

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2462.00	27.75	5.29	102.12	31.67	103.49	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

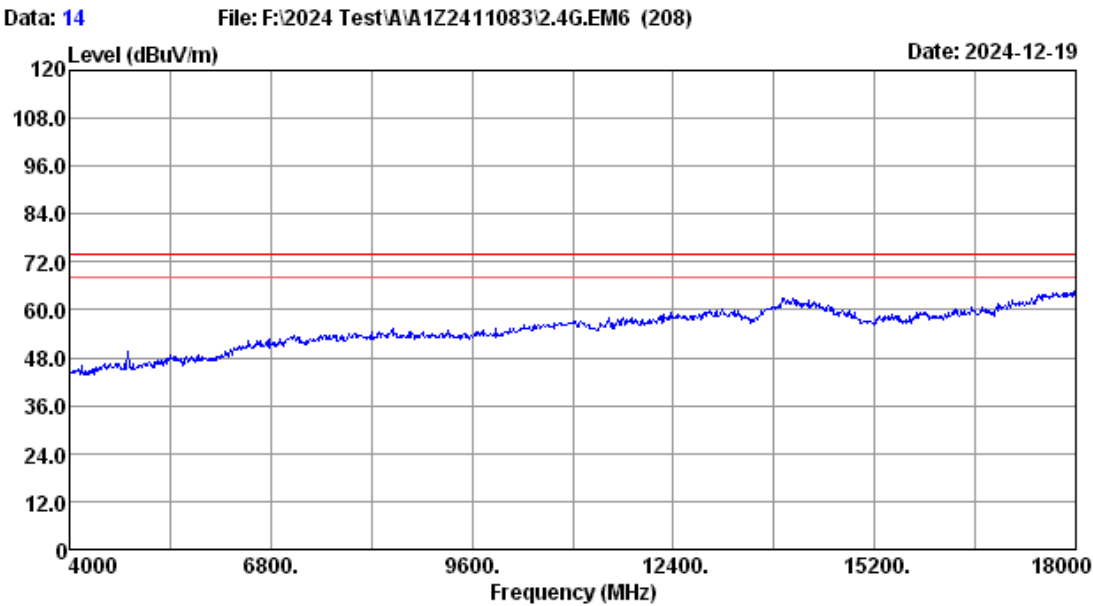


Site no.	: 3m Chamber	Data no.	: 14
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11b 2462 TX mode S0		

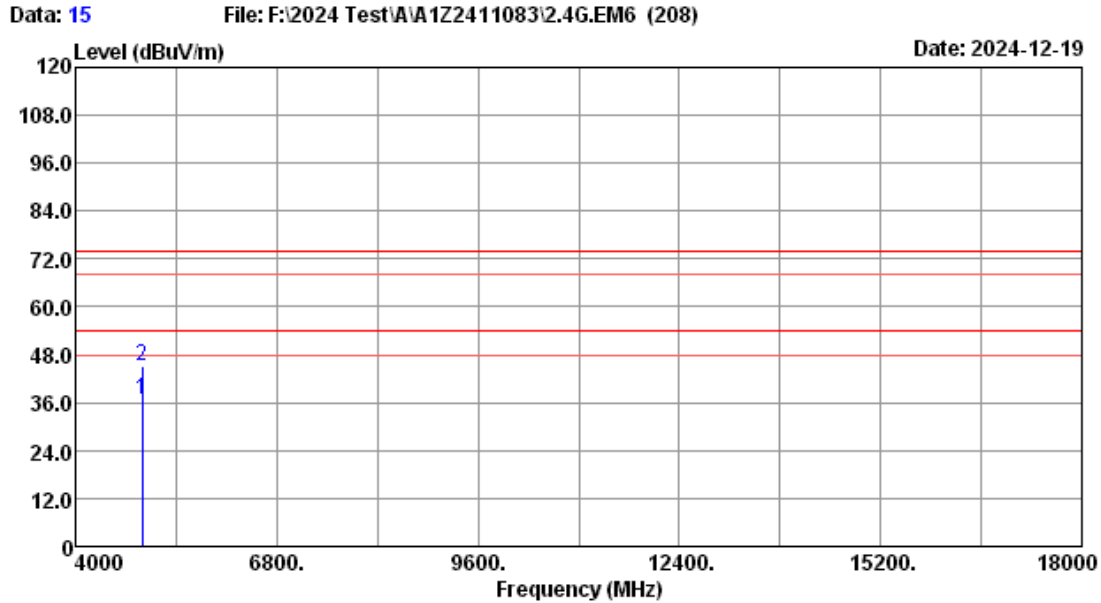

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2462 TX mode S0

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.59	7.21	28.43	30.41	36.82	54.00	17.18	Average
2	4924.00	31.59	7.21	36.79	30.41	45.18	74.00	28.82	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

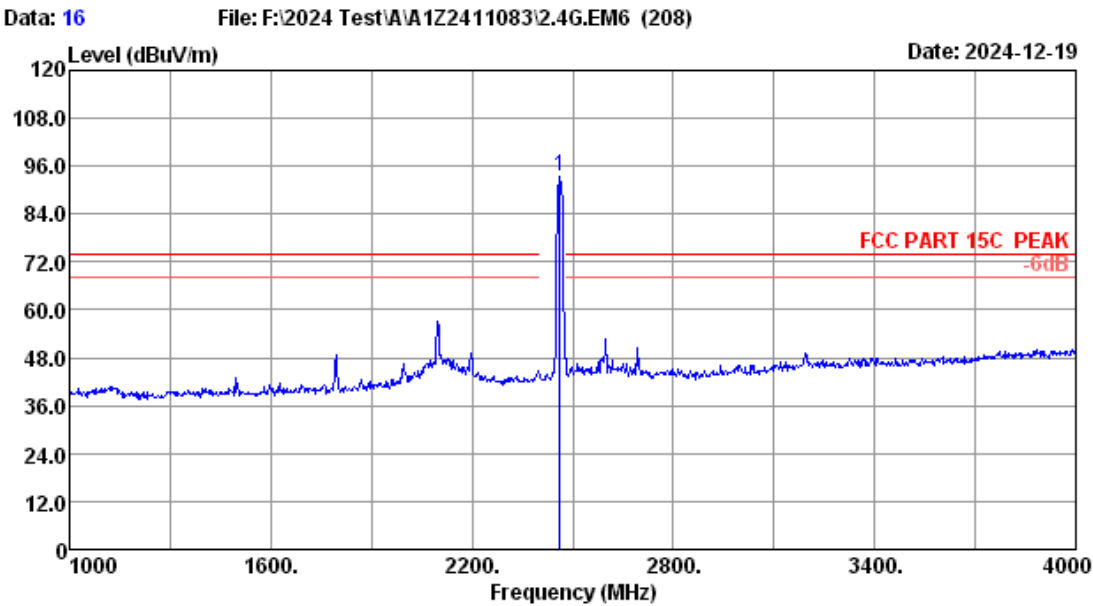


Site no. : 3m Chamber Data no. : 16
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.2°C/52.5% Engineer : Evan
Power rating :
Test Mode : 2.4G 11b 2462 TX mode S0

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.75	5.29	92.04	31.67	93.41	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

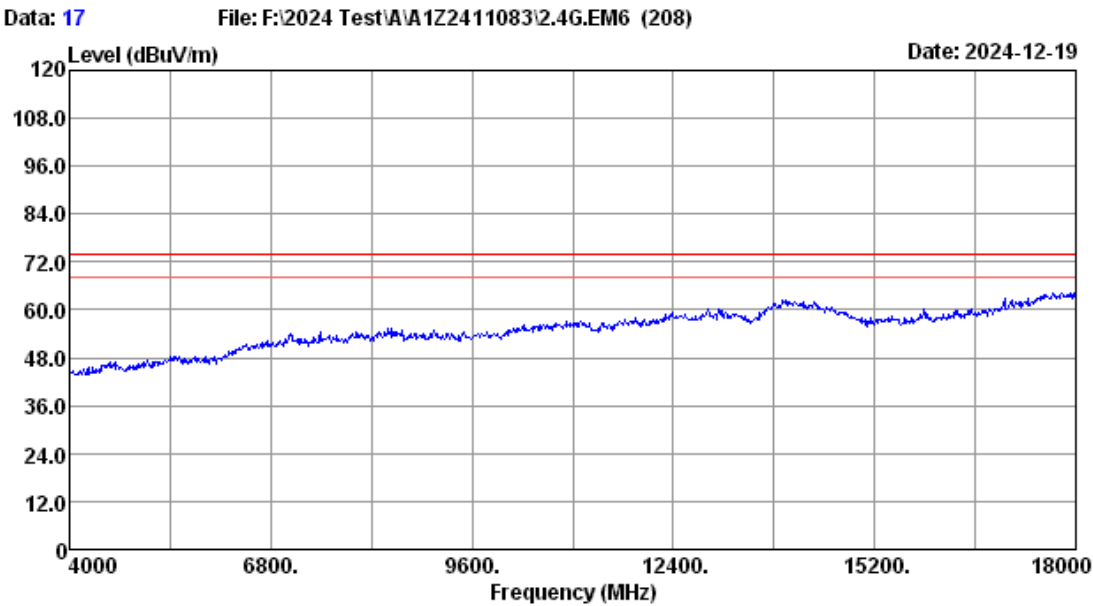

Site no.	: 3m Chamber	Data no.	: 17
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11b 2462 TX mode S0		

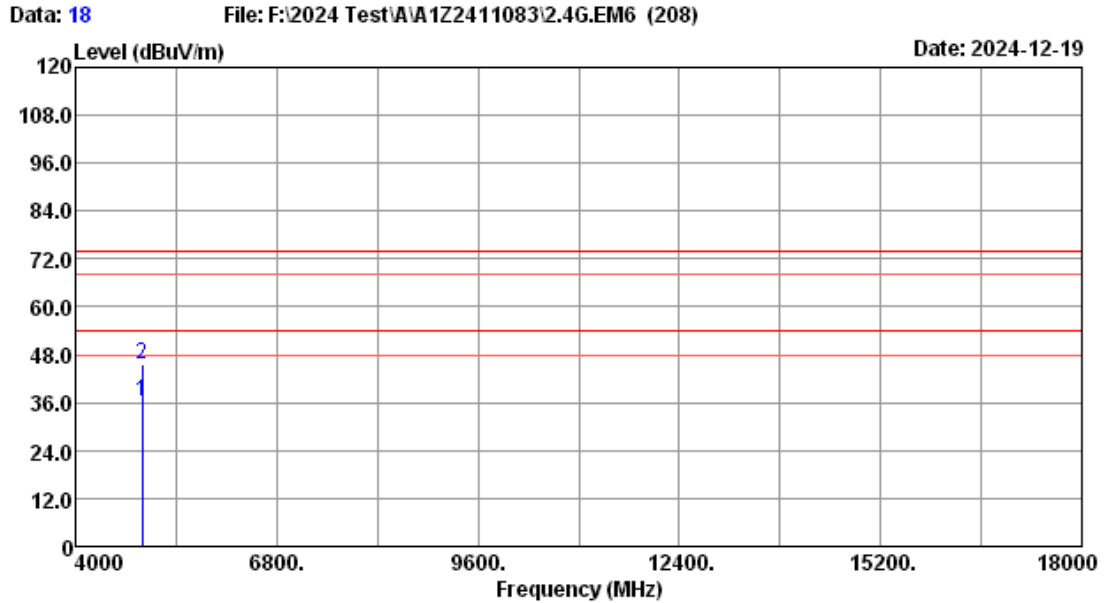

Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2462 TX mode S0

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.59	7.21	28.13	30.41	36.52	54.00	17.48	Average
2	4924.00	31.59	7.21	37.35	30.41	45.74	74.00	28.26	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

SISO Mode ANT 1 11b

Data: 19

File: F:\2024 Test\A\A1Z2411083\2.4G.EM6 (208)


Date: 2024-12-19

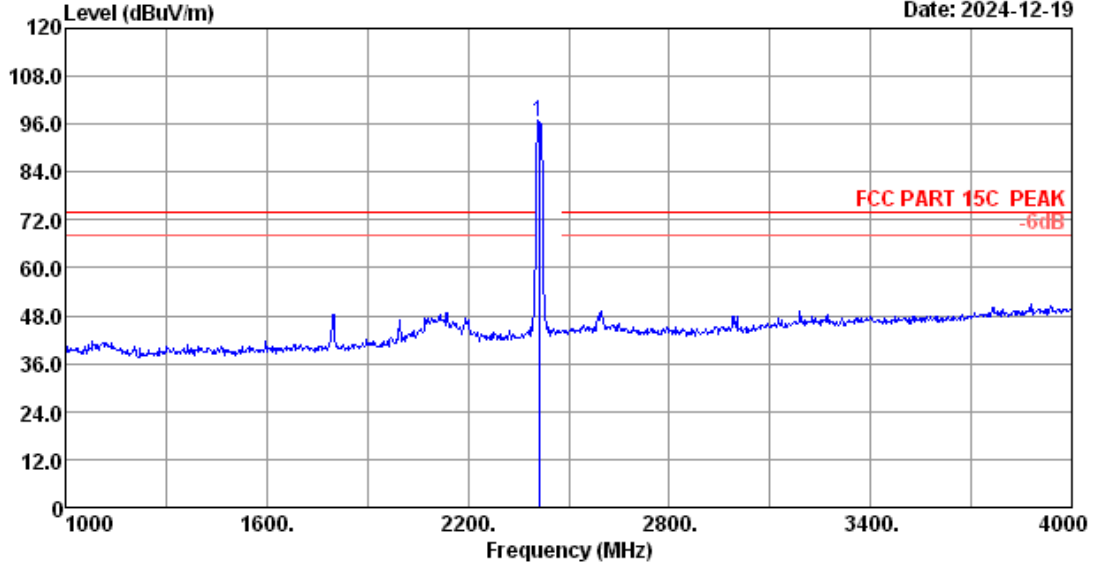


Site no. : 3m Chamber Data no. : 19
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2412 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.70	5.23	95.09	31.69	96.33	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

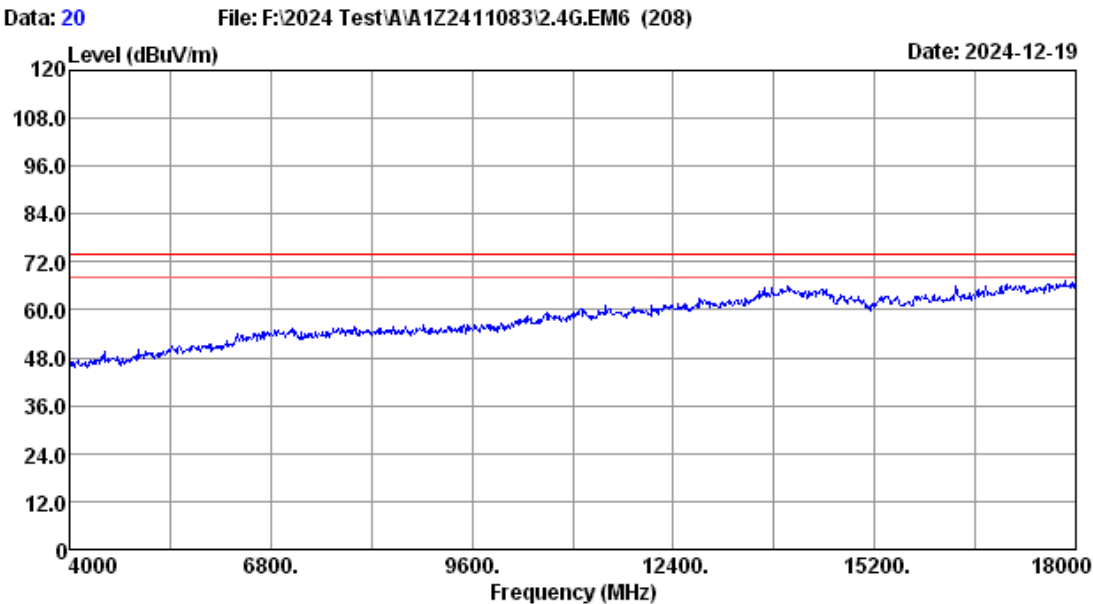


Site no.	: 3m Chamber	Data no.	: 20
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11b 2412 TX mode S1		

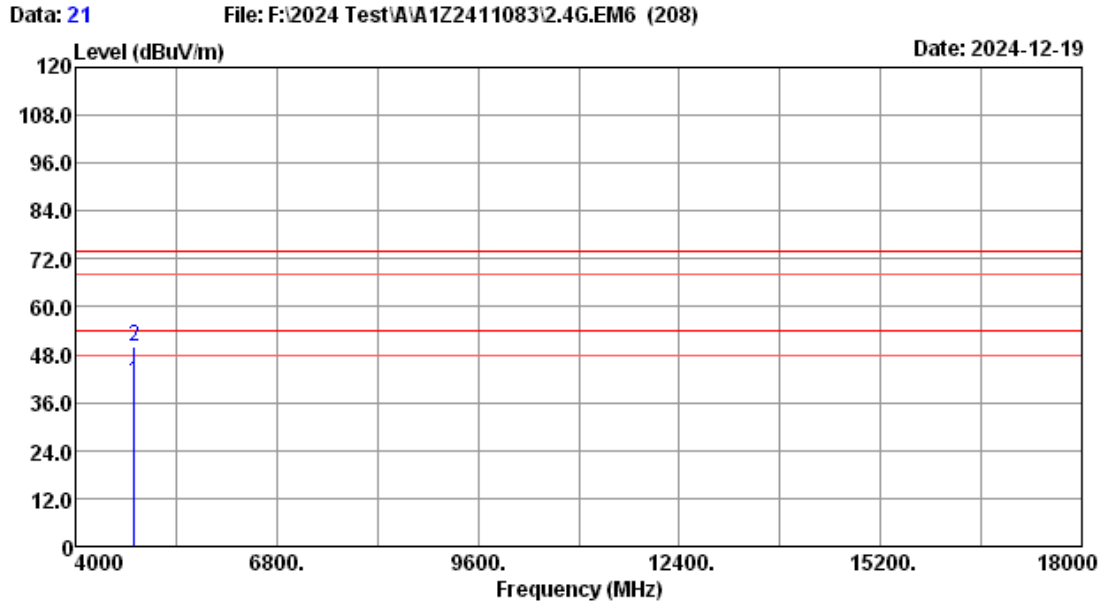

Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2412 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.30	7.15	33.26	30.42	41.29	54.00	12.71	Average
2	4824.00	31.30	7.15	42.17	30.42	50.20	74.00	23.80	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

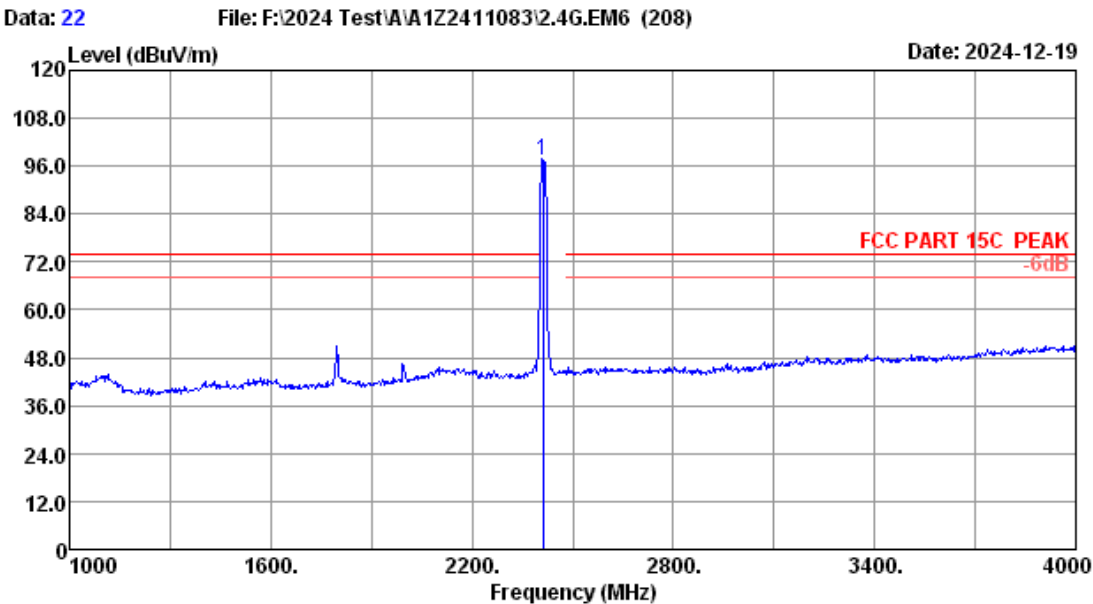


Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2412 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.70	5.23	96.04	31.69	97.28	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

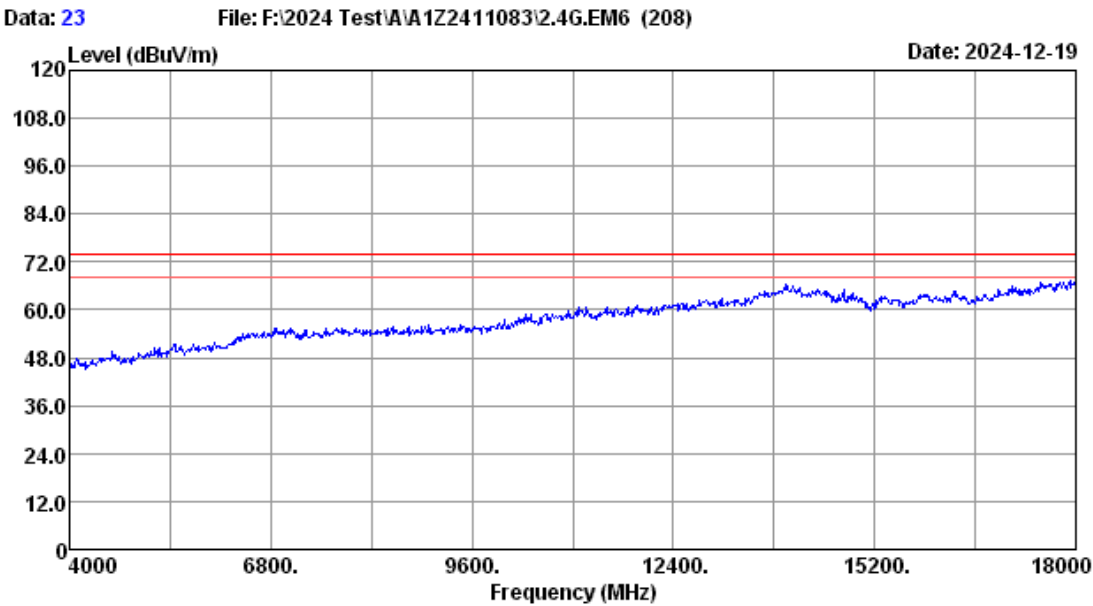

Site no.	: 3m Chamber	Data no.	: 23
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11b 2412 TX mode S1		

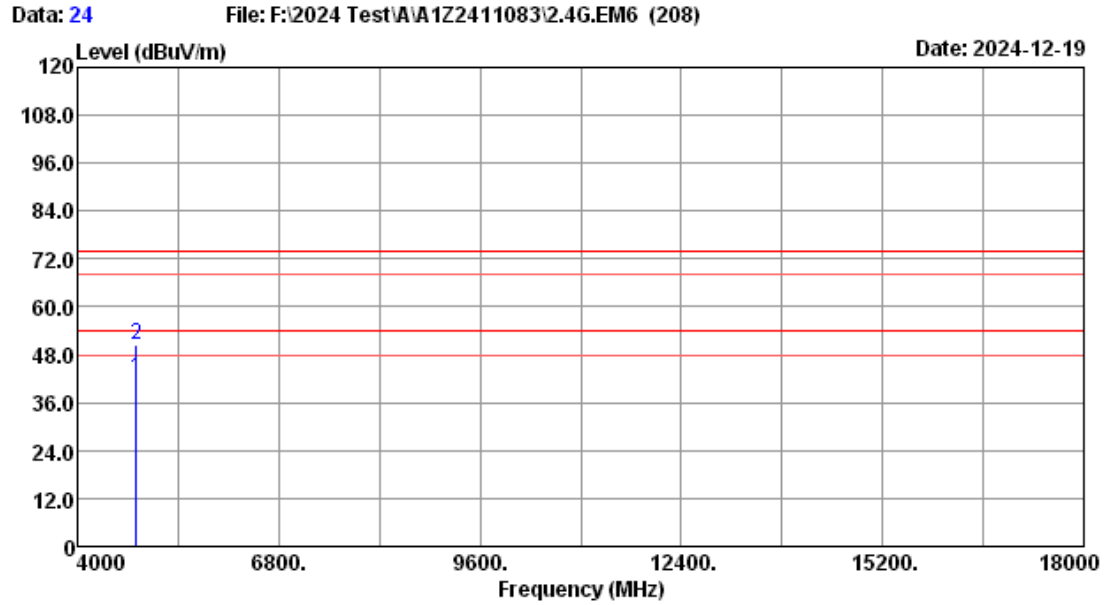


Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2412 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.30	7.15	34.17	30.42	42.20	54.00	11.80	Average
2	4824.00	31.30	7.15	42.62	30.42	50.65	74.00	23.35	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.


FCC ID: HLZGW1541P

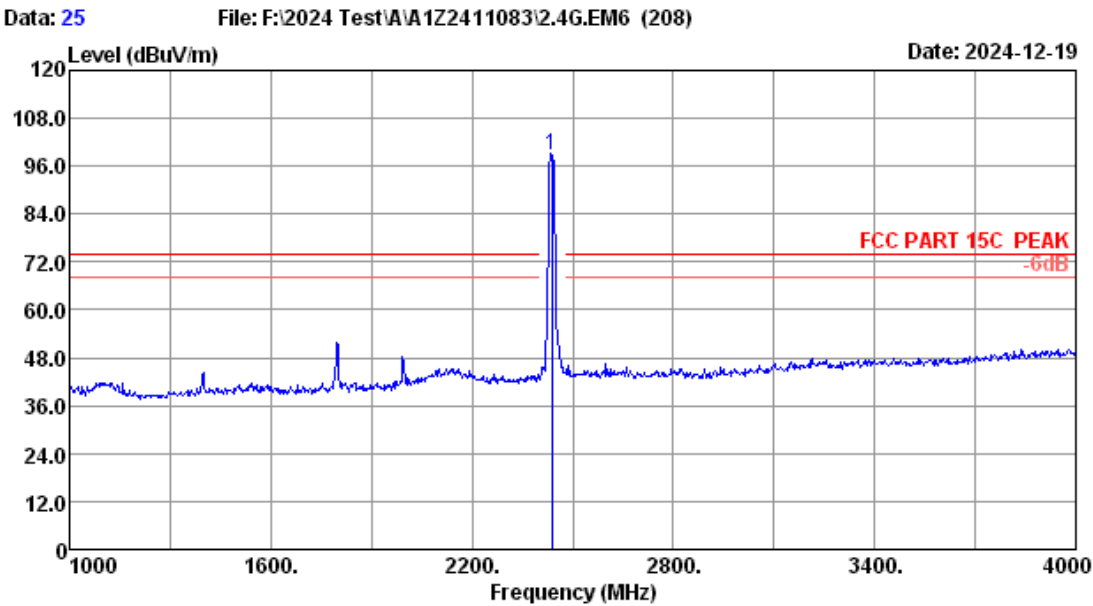


Site no. : 3m Chamber Data no. : 25
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2437 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.70	5.25	97.36	31.68	98.63	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

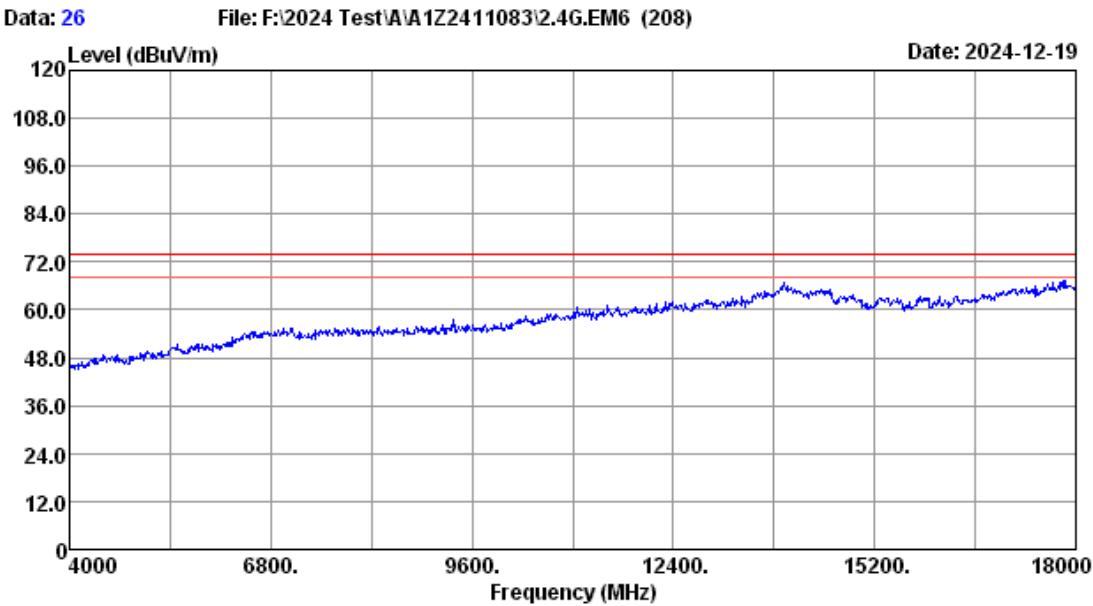


Site no.	: 3m Chamber	Data no.	: 26
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11b 2437 TX mode S1		

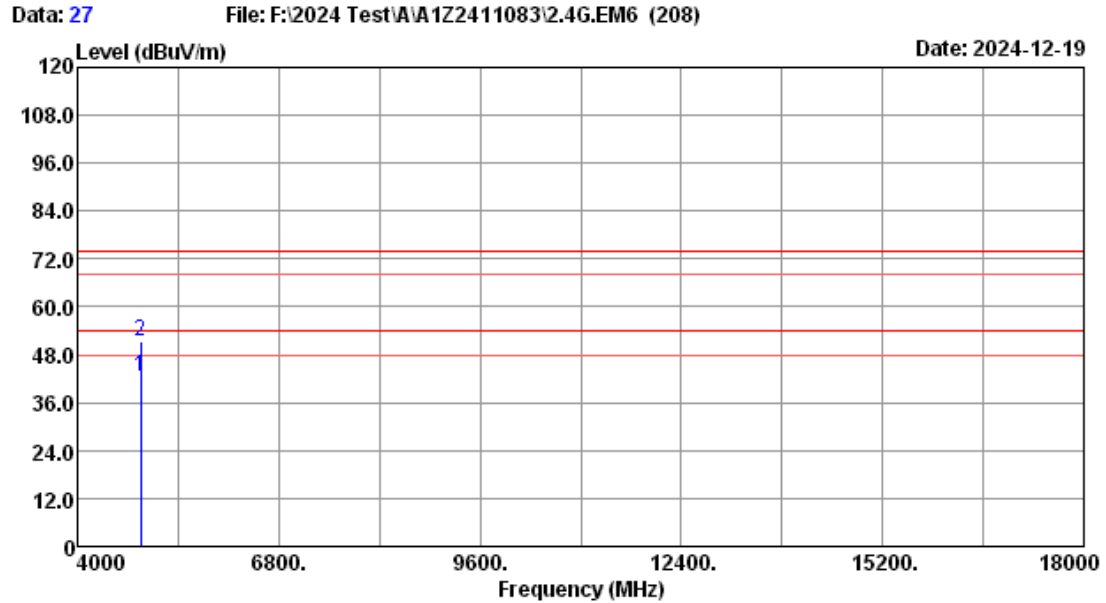

Site no. : 3m Chamber Data no. : 27
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2437 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.35	7.18	34.50	30.41	42.62	54.00	11.38	Average
2	4874.00	31.35	7.18	43.20	30.41	51.32	74.00	22.68	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

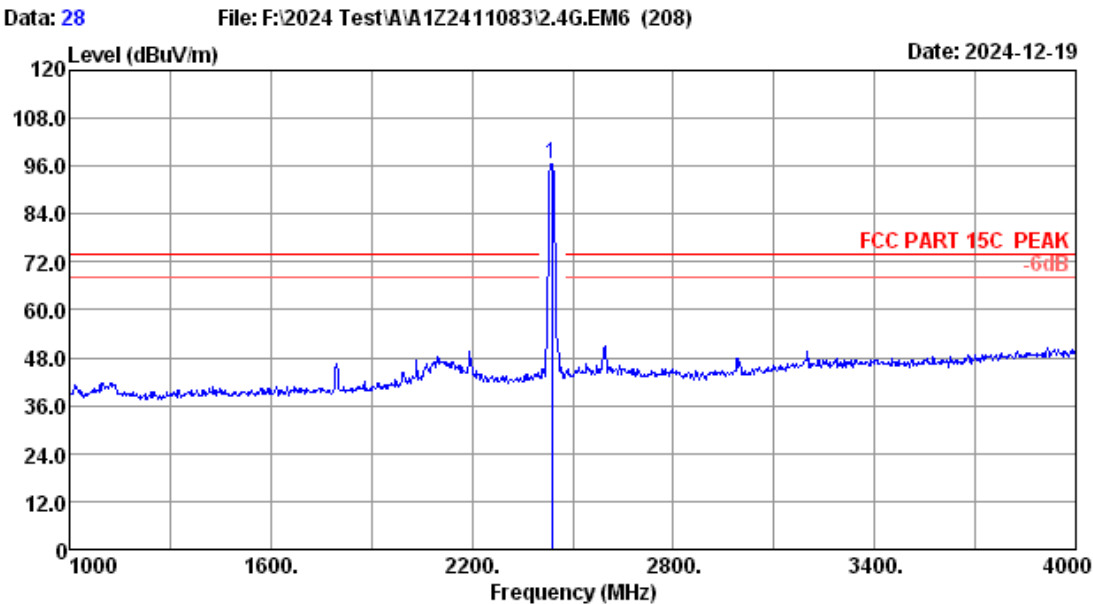


Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2437 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.70	5.25	95.11	31.68	96.38	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

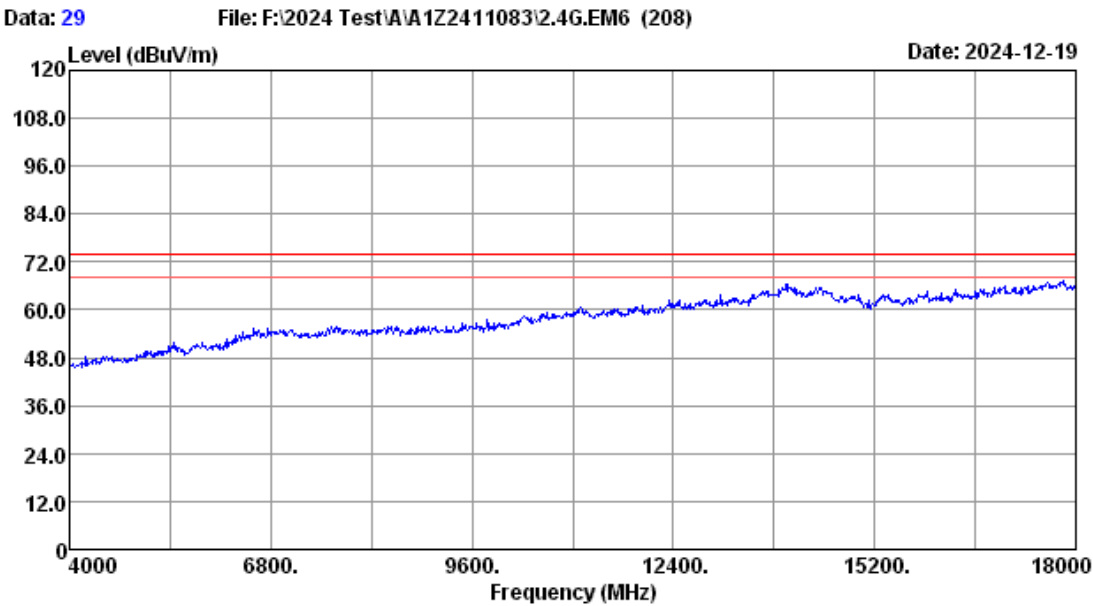


Site no.	: 3m Chamber	Data no.	: 29
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11b 2437 TX mode S1		

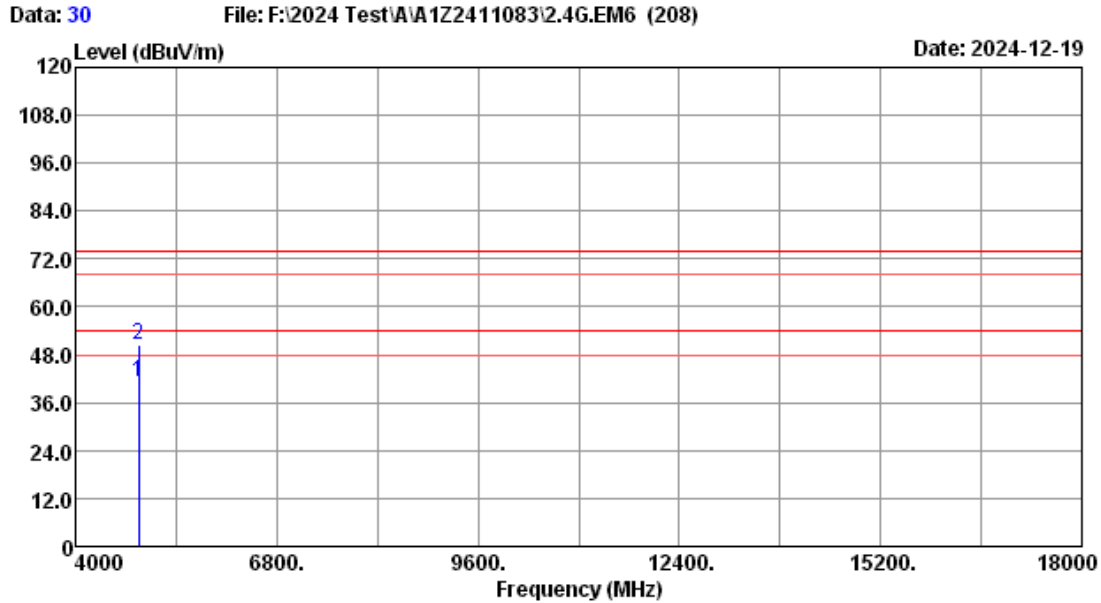

Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2437 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.35	7.18	33.25	30.41	41.37	54.00	12.63	Average
2	4874.00	31.35	7.18	42.57	30.41	50.69	74.00	23.31	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

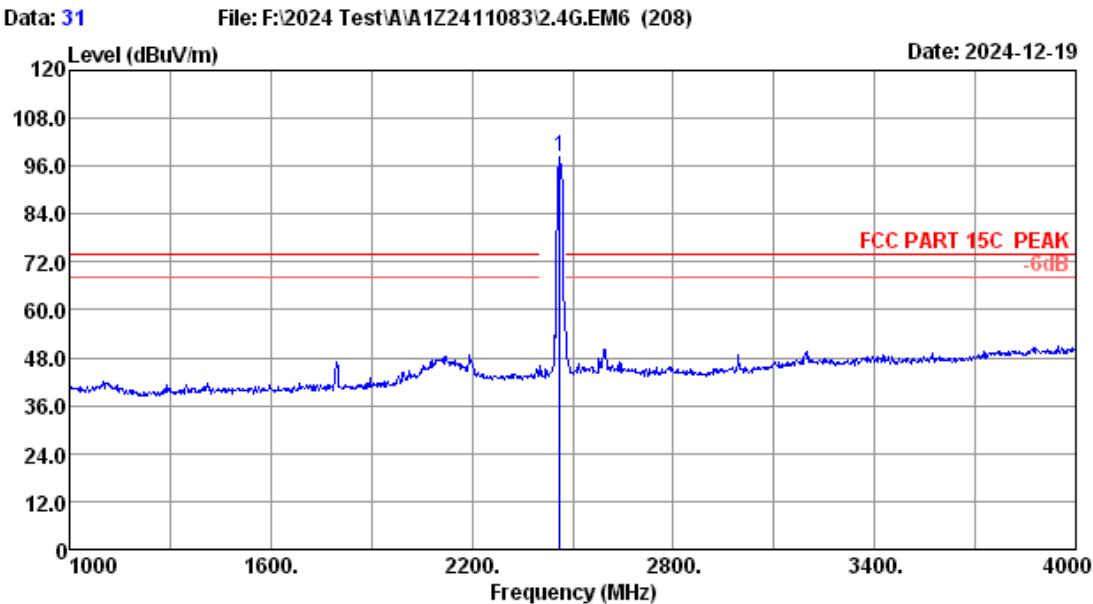


Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2462 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.75	5.29	96.78	31.67	98.15	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

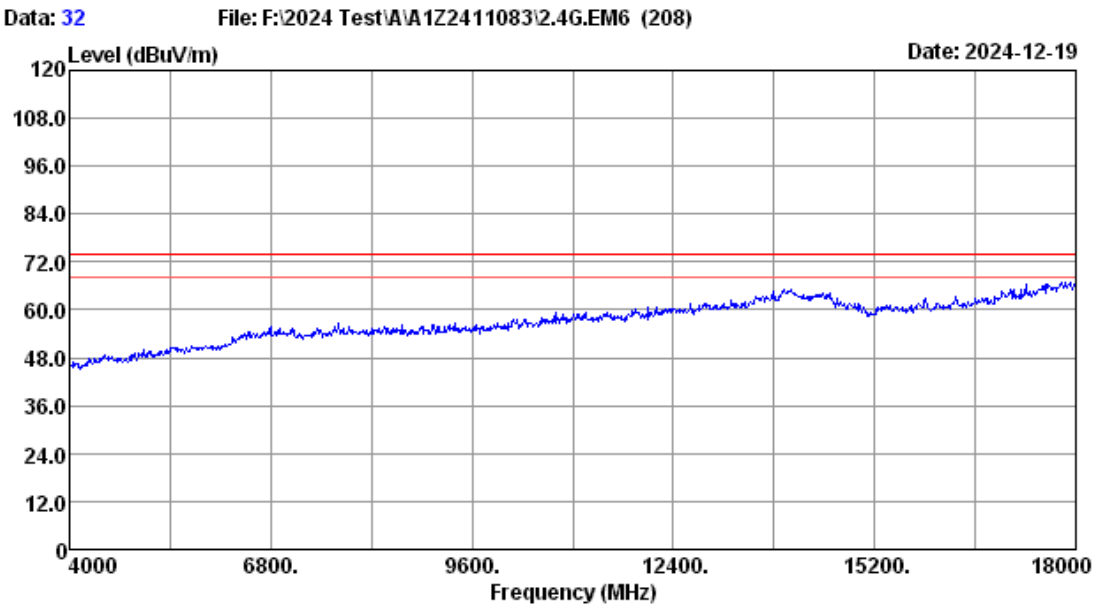


Site no.	: 3m Chamber	Data no.	: 32
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11b 2462 TX mode S1		

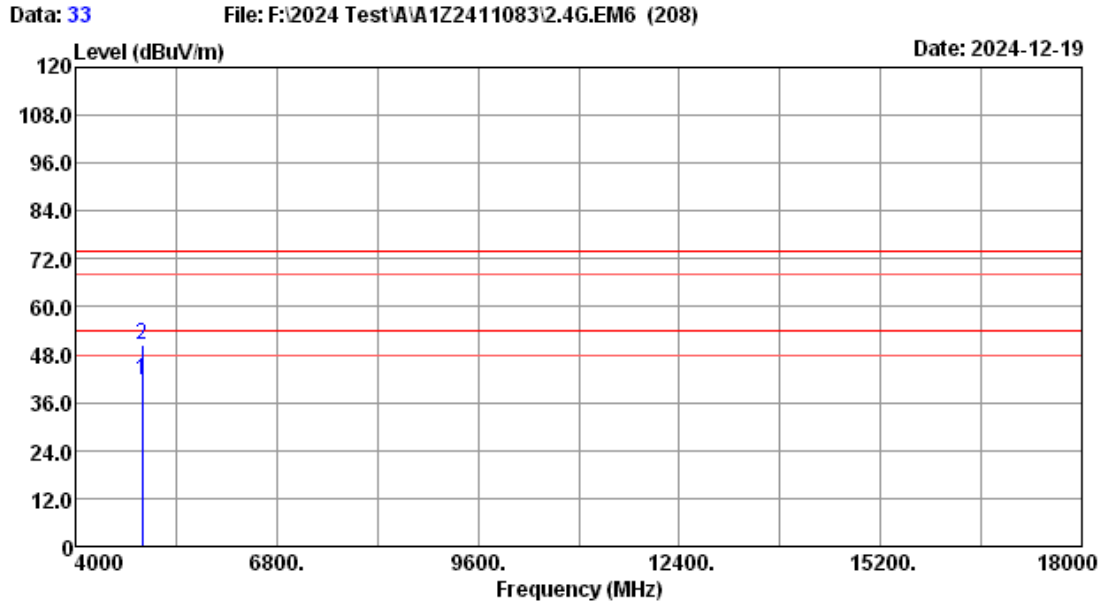

Site no. : 3m Chamber Data no. : 33
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2462 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.59	7.21	33.16	30.41	41.55	54.00	12.45	Average
2	4924.00	31.59	7.21	42.22	30.41	50.61	74.00	23.39	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

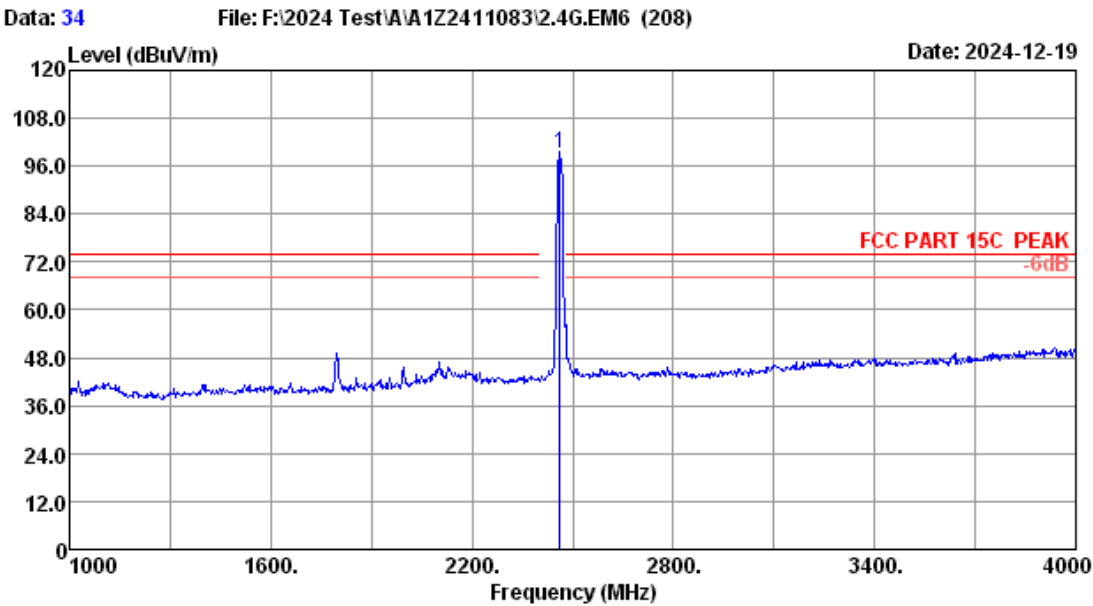


Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2462 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.75	5.29	97.96	31.67	99.33	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

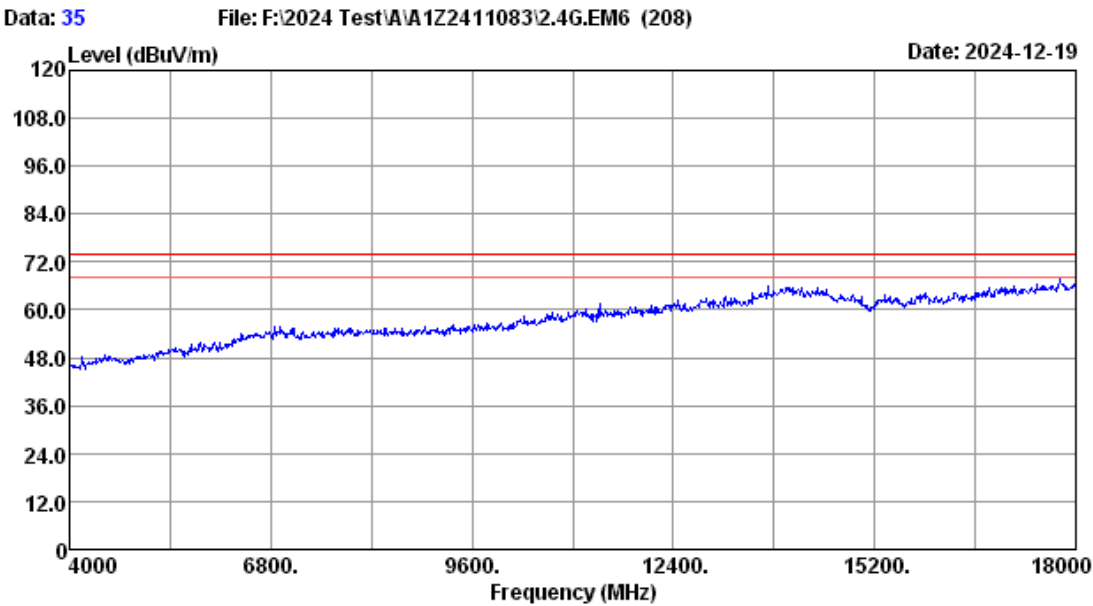

Site no.	: 3m Chamber	Data no.	: 35
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11b 2462 TX mode S1		

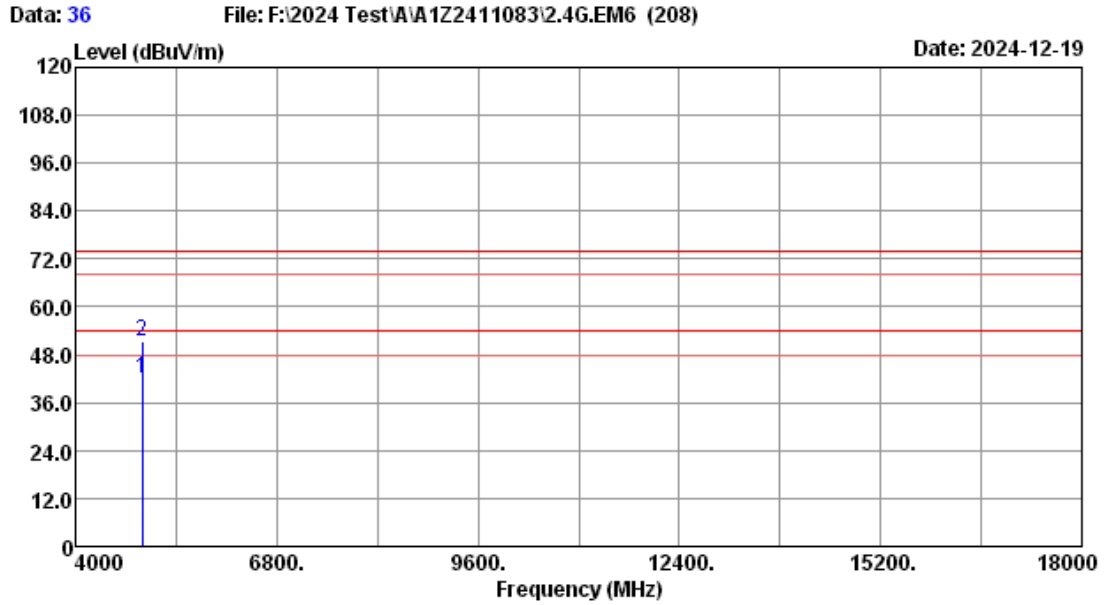

Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2462 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.59	7.21	33.57	30.41	41.96	54.00	12.04	Average
2	4924.00	31.59	7.21	42.97	30.41	51.36	74.00	22.64	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

SISO Mode ANT0 11g

Data: 37

File: F:\2024 Test\A\A1Z2411083\2.4G.EM6 (208)


Date: 2024-12-19

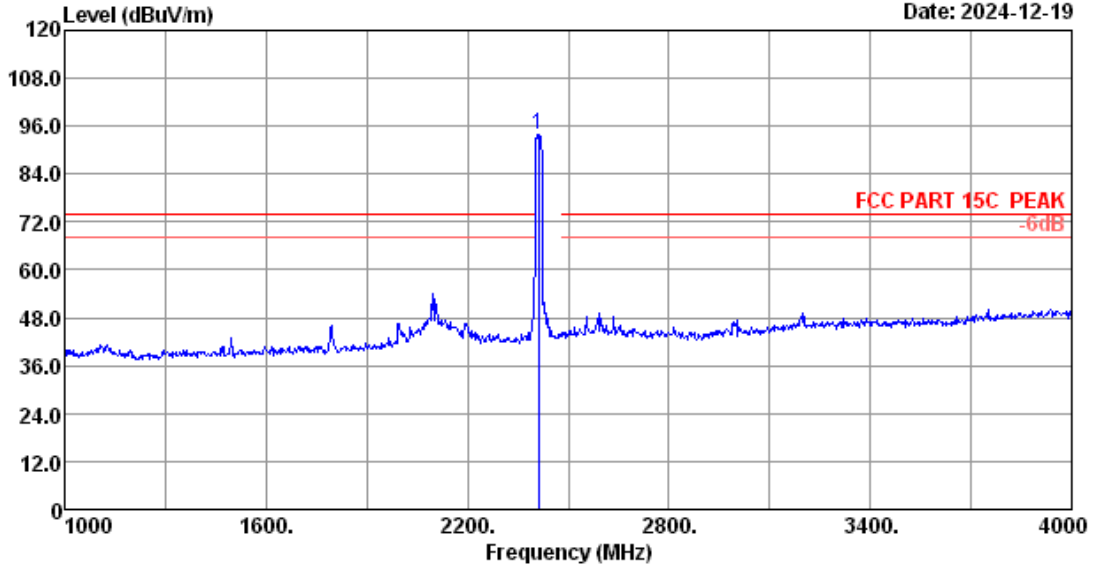


Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2412 TX mode S0

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.70	5.23	92.59	31.69	93.83	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

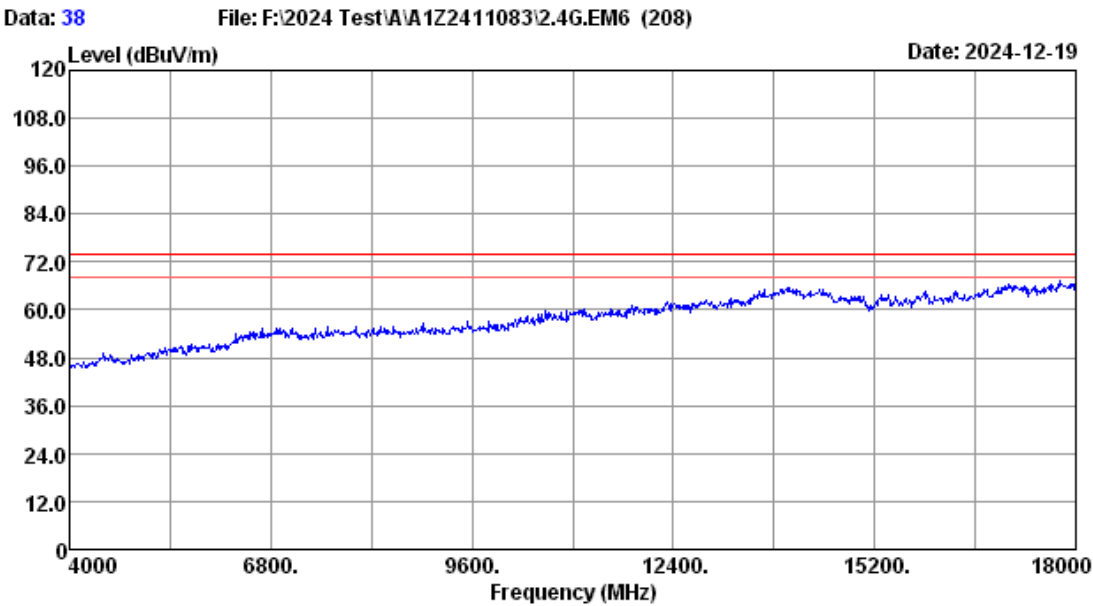


Site no.	: 3m Chamber	Data no.	: 38
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11g 2412 TX mode S0		

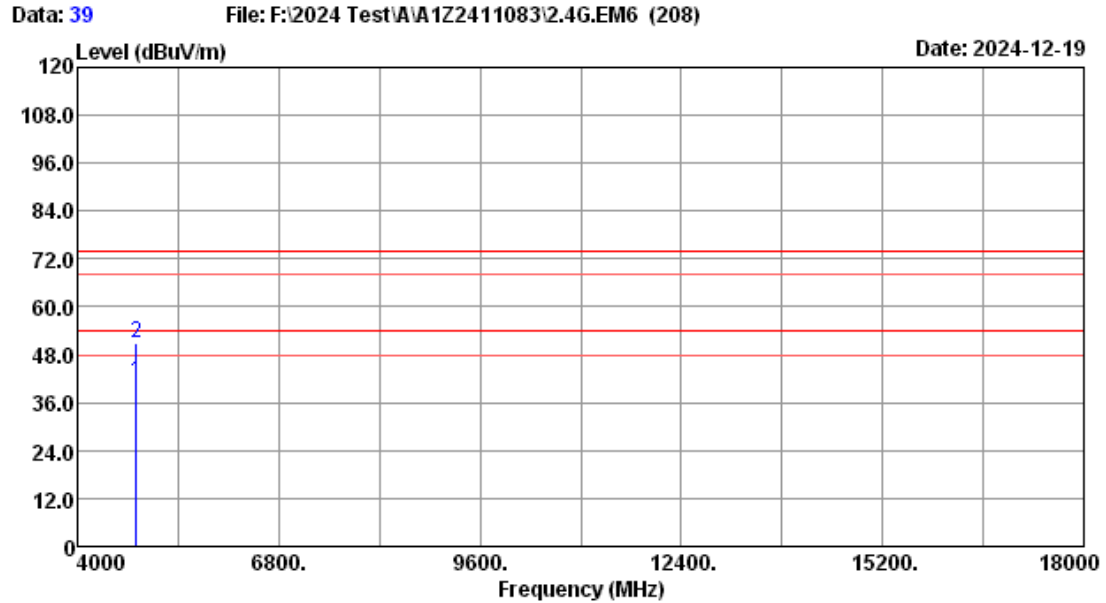

Site no. : 3m Chamber Data no. : 39
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2412 TX mode S0

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.30	7.15	33.03	30.42	41.06	54.00	12.94	Average
2	4824.00	31.30	7.15	42.81	30.42	50.84	74.00	23.16	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

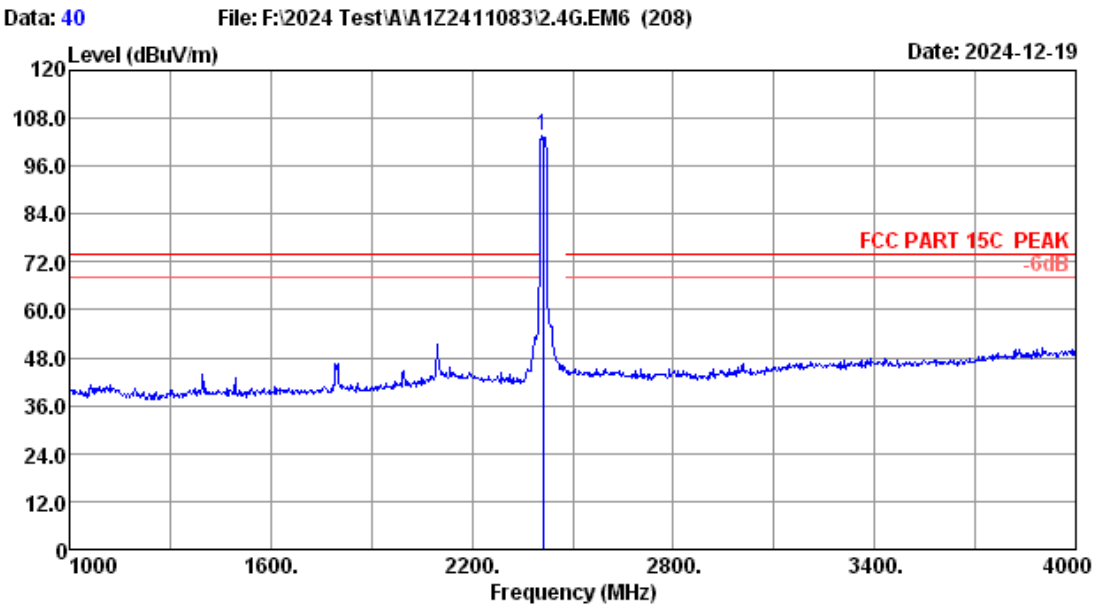


Site no.	: 3m Chamber	Data no.	: 40
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11g 2412 TX mode S0		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.70	5.23	102.19	31.69	103.43	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

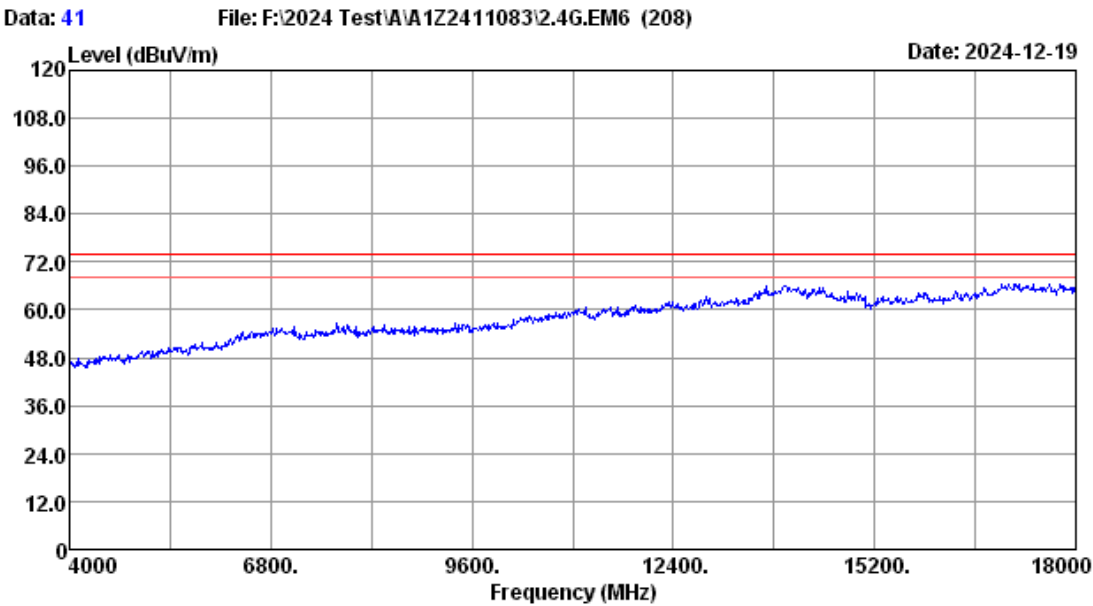


Site no.	: 3m Chamber	Data no.	: 41
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11g 2412 TX mode S0		

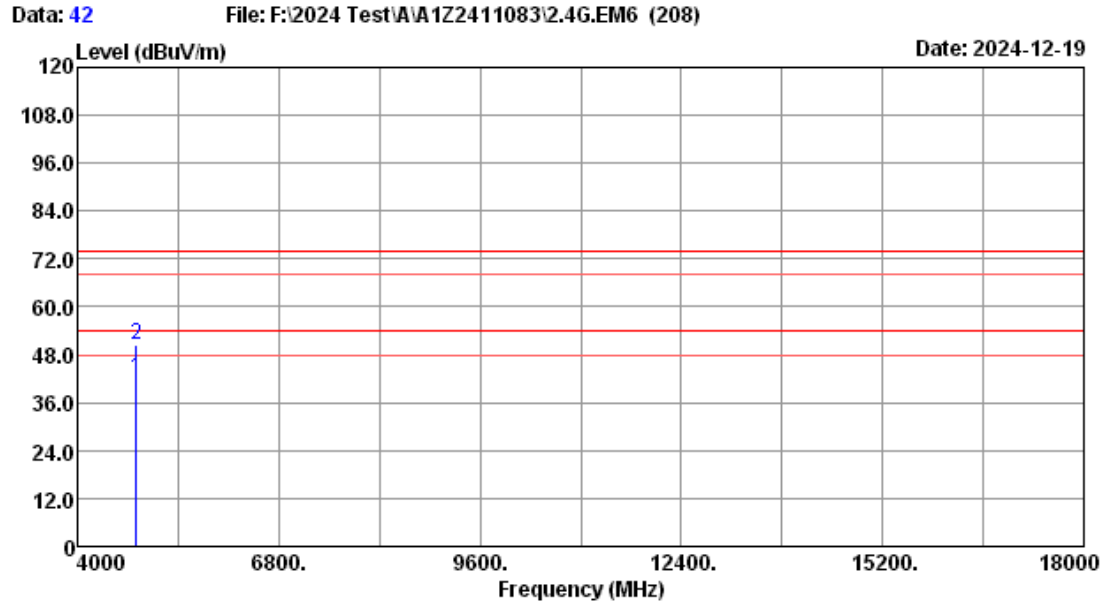

Site no. : 3m Chamber Data no. : 42
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2412 TX mode S0

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.30	7.15	33.92	30.42	41.95	54.00	12.05	Average
2	4824.00	31.30	7.15	42.24	30.42	50.27	74.00	23.73	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

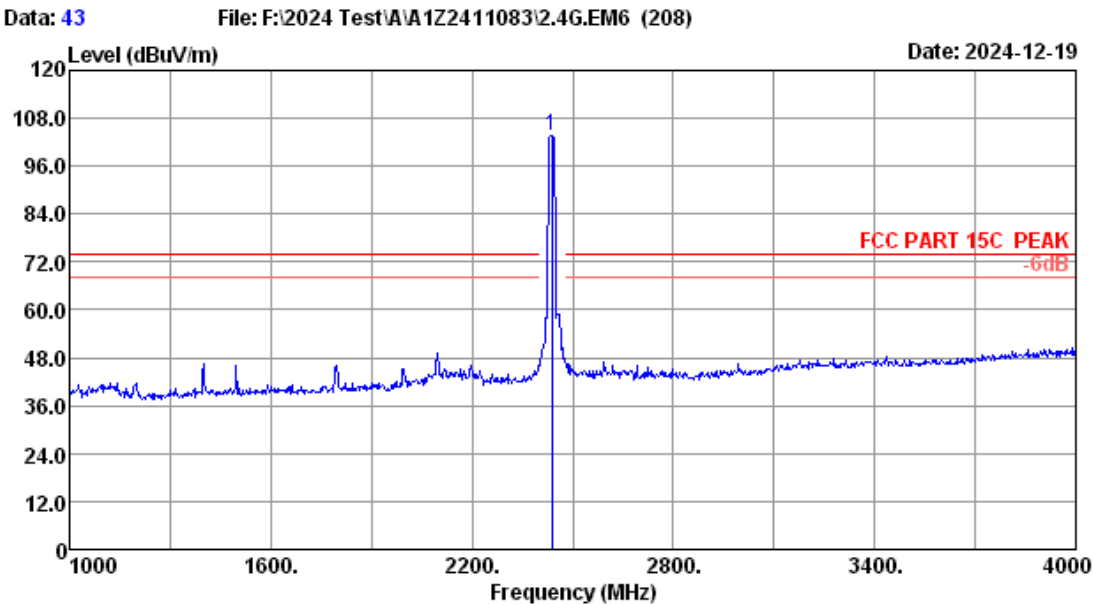


Site no.	: 3m Chamber	Data no.	: 43
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11g 2437 TX mode S0		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.70	5.25	102.34	31.68	103.61	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

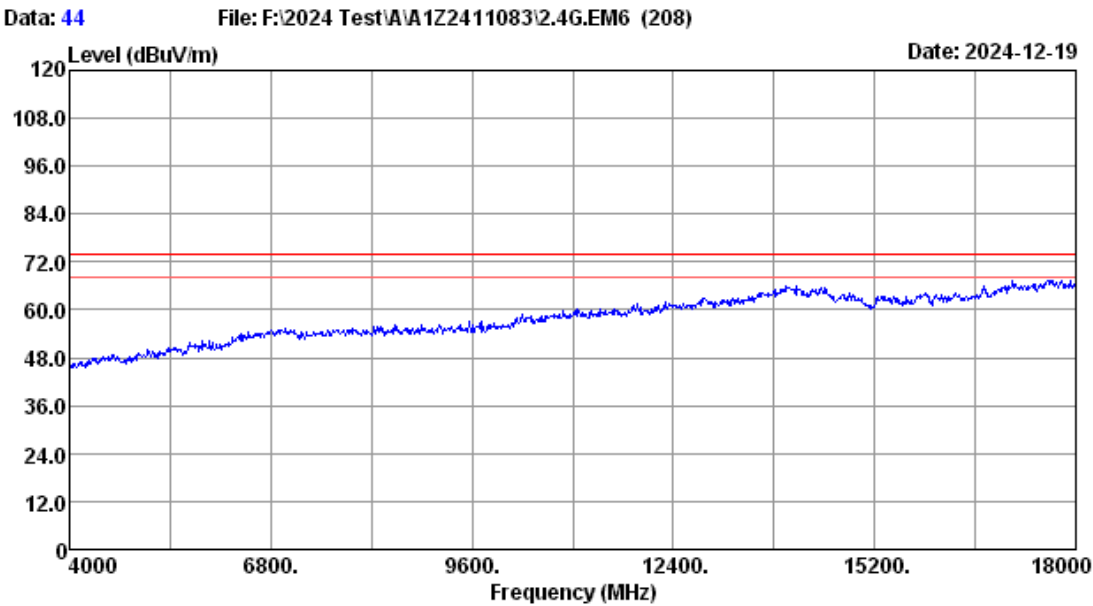


Site no.	: 3m Chamber	Data no.	: 44
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11g 2437 TX mode S0		

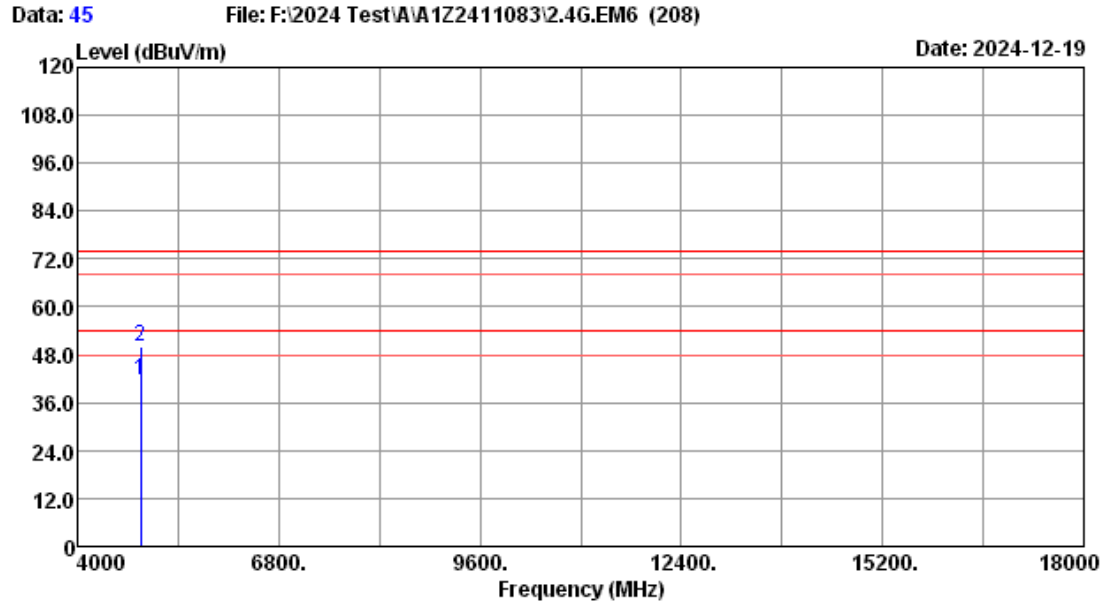

Site no. : 3m Chamber Data no. : 45
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2437 TX mode S0

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.35	7.18	33.67	30.41	41.79	54.00	12.21	Average
2	4874.00	31.35	7.18	42.04	30.41	50.16	74.00	23.84	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

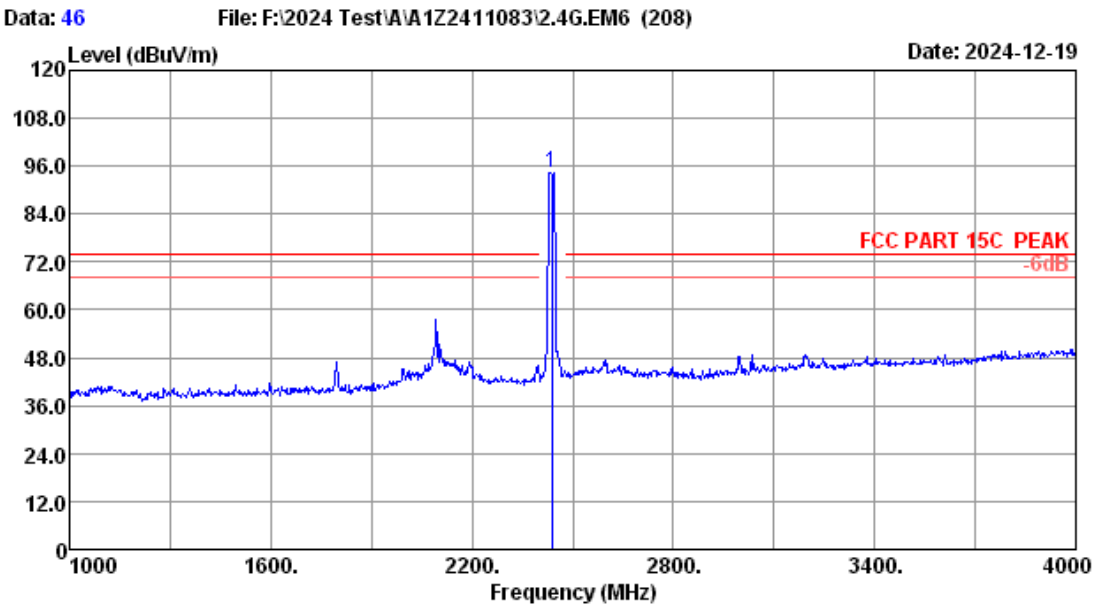


Site no. : 3m Chamber Data no. : 46
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2437 TX mode S0

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.70	5.25	92.88	31.68	94.15	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

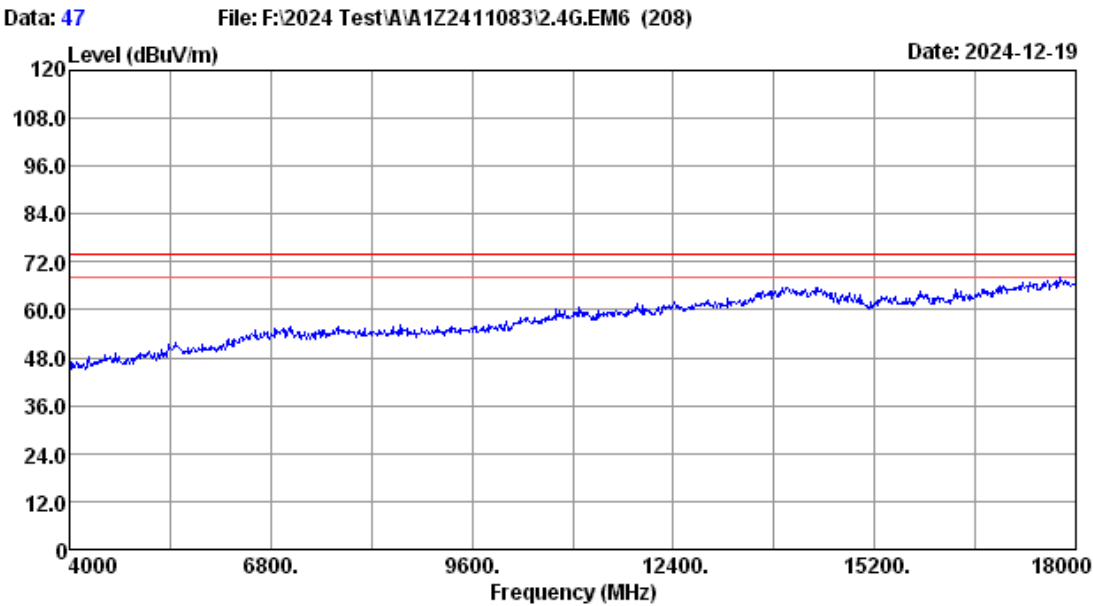

Site no.	: 3m Chamber	Data no.	: 47
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11g 2437 TX mode S0		

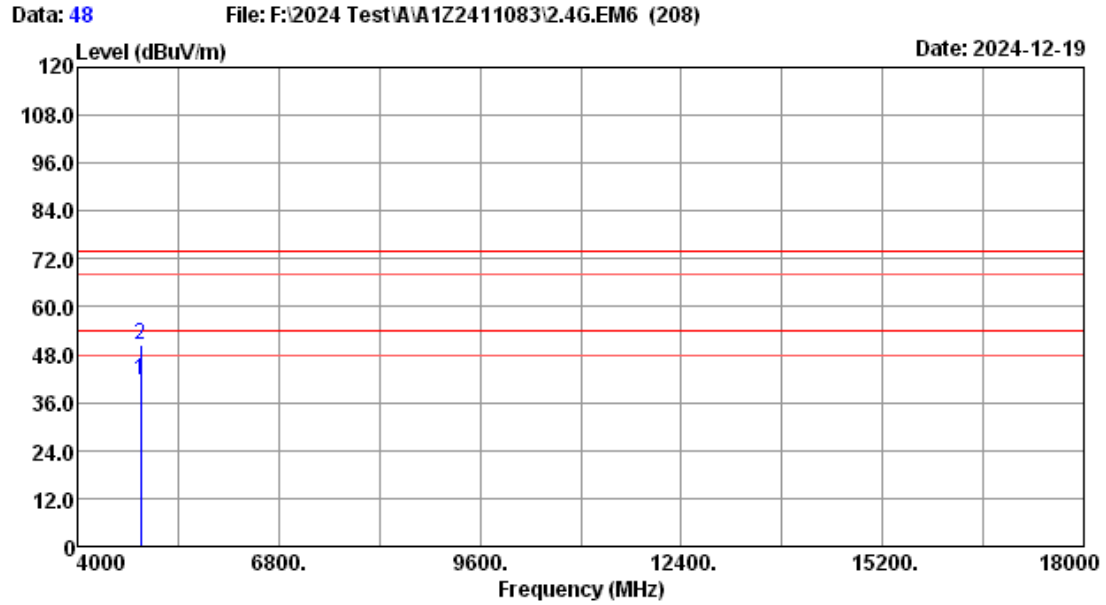


Site no. : 3m Chamber Data no. : 48
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2437 TX mode S0

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.35	7.18	33.52	30.41	41.64	54.00	12.36	Average
2	4874.00	31.35	7.18	42.28	30.41	50.40	74.00	23.60	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.


FCC ID: HLZGW1541P

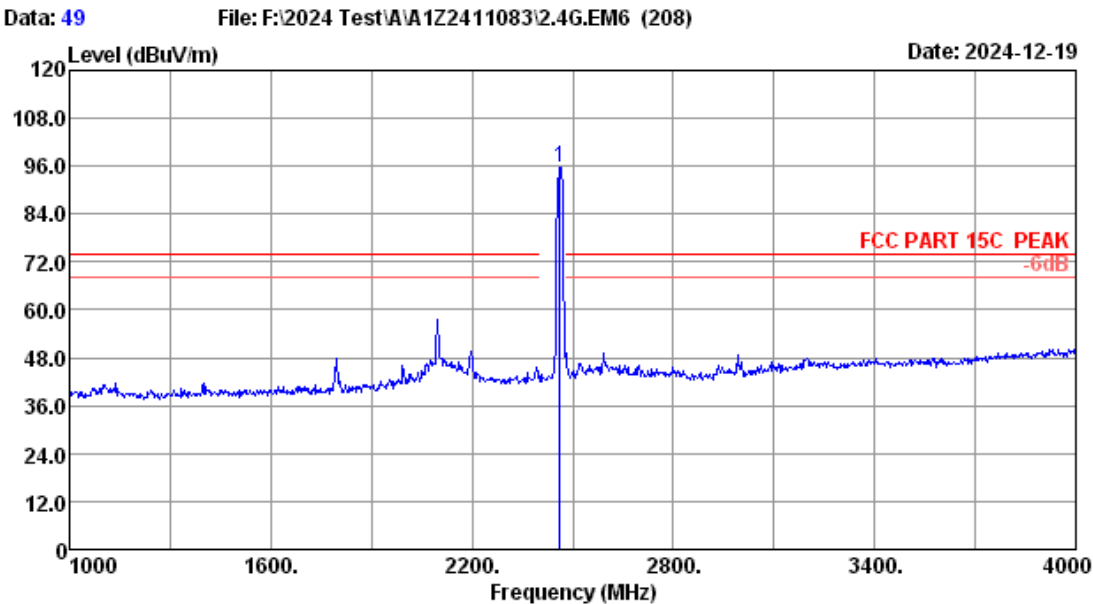


Site no. : 3m Chamber Data no. : 49
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2462 TX mode S0

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.75	5.29	94.28	31.67	95.65	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

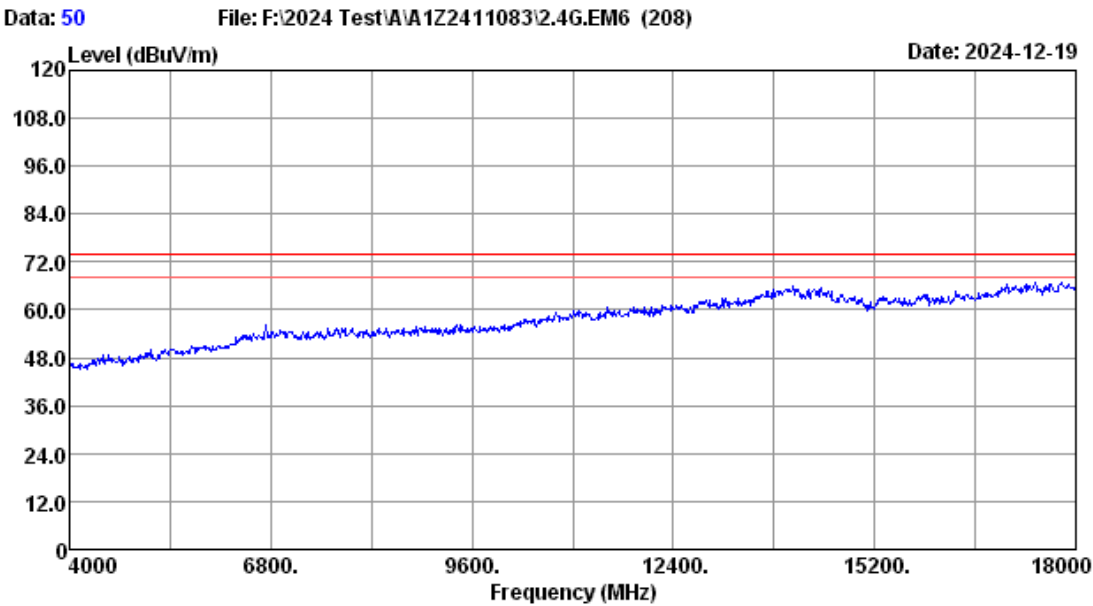

Site no.	: 3m Chamber	Data no.	: 50
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11g 2462 TX mode S0		

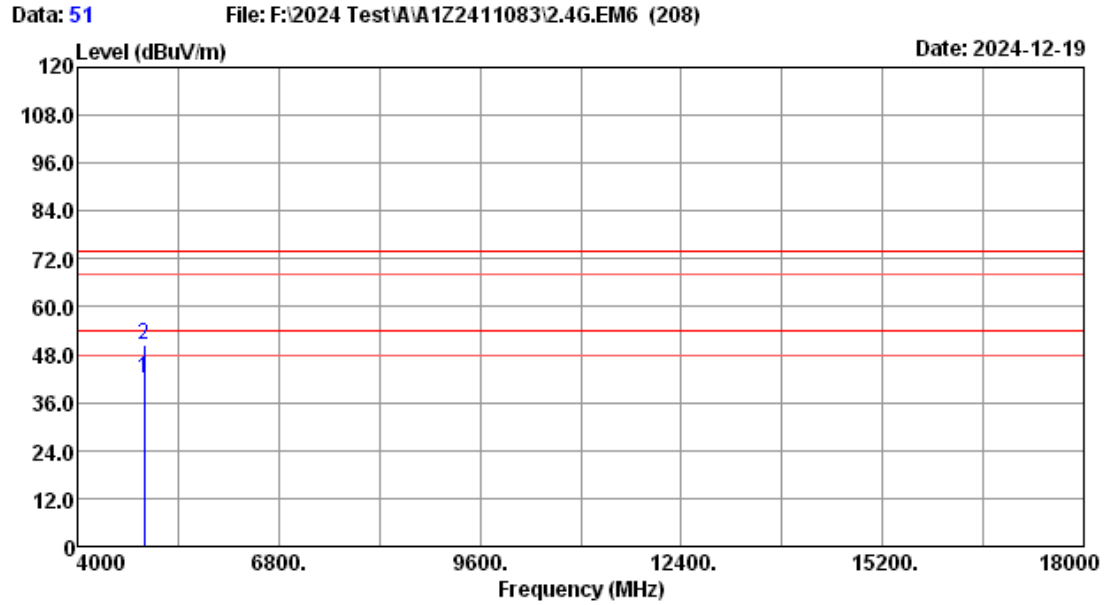


Site no. : 3m Chamber Data no. : 51
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2462 TX mode S0

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.59	7.21	33.76	30.41	42.15	54.00	11.85	Average
2	4924.00	31.59	7.21	42.10	30.41	50.49	74.00	23.51	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.


FCC ID: HLZGW1541P

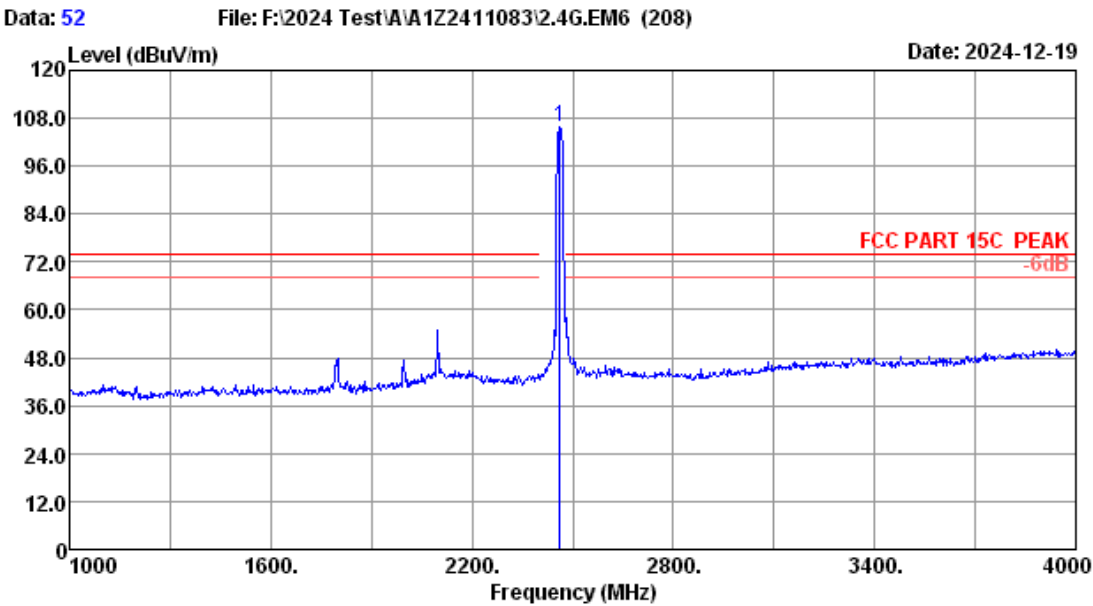


Site no. : 3m Chamber Data no. : 52
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2462 TX mode S0

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.75	5.29	104.31	31.67	105.68	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

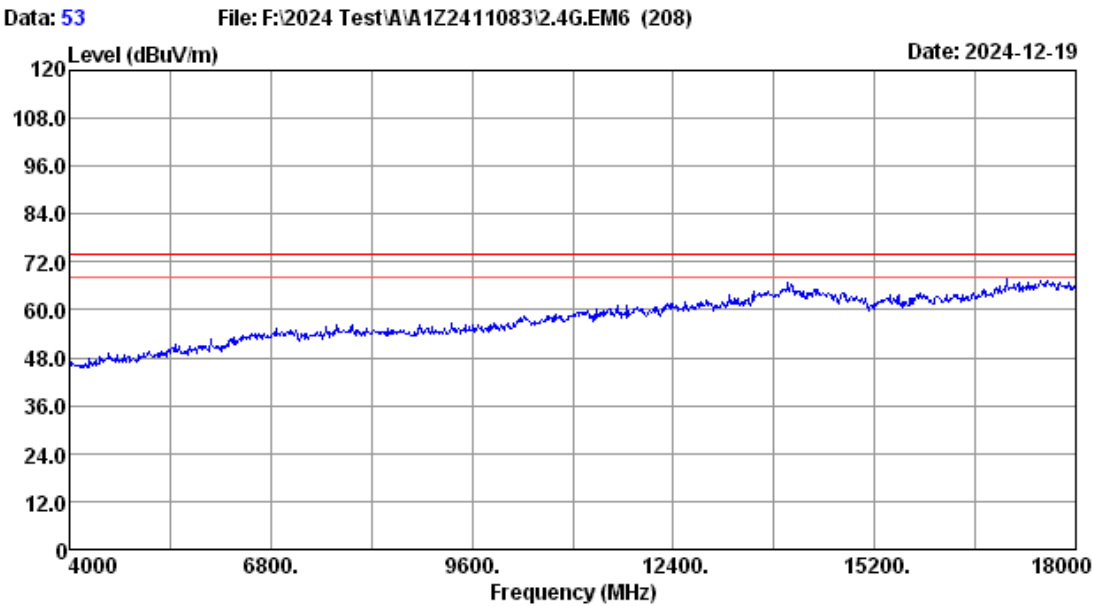

Site no.	: 3m Chamber	Data no.	: 53
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11g 2462 TX mode S0		

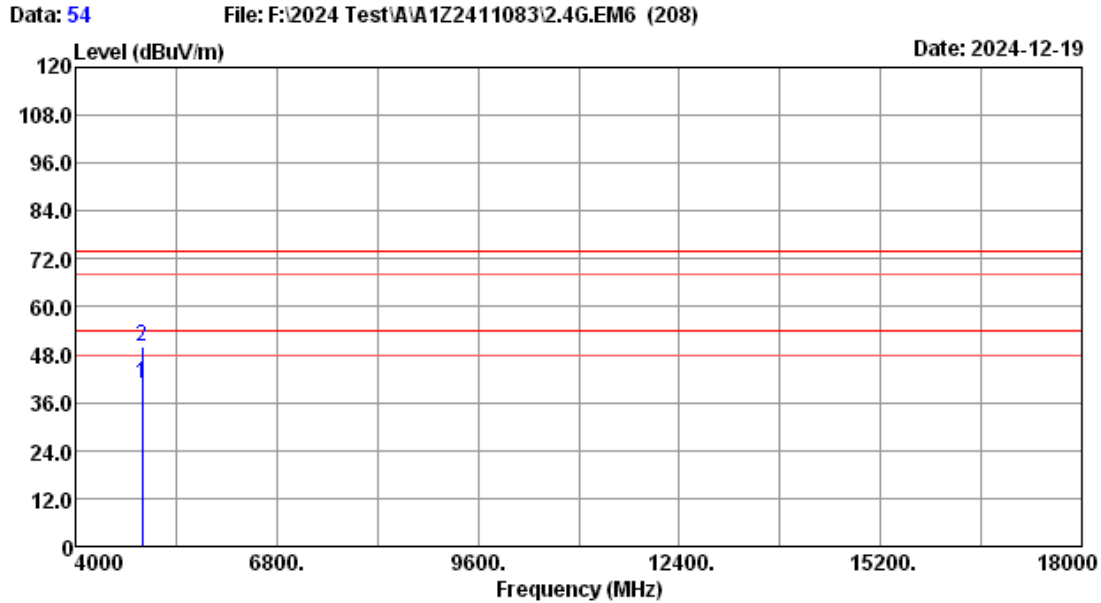

Site no. : 3m Chamber Data no. : 54
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2462 TX mode S0

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.59	7.21	32.17	30.41	40.56	54.00	13.44	Average
2	4924.00	31.59	7.21	41.73	30.41	50.12	74.00	23.88	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

SISO Mode ANT1 11g

Data: 55

File: F:\2024 Test\A\A1Z2411083\2.4G.EM6 (208)


Date: 2024-12-19

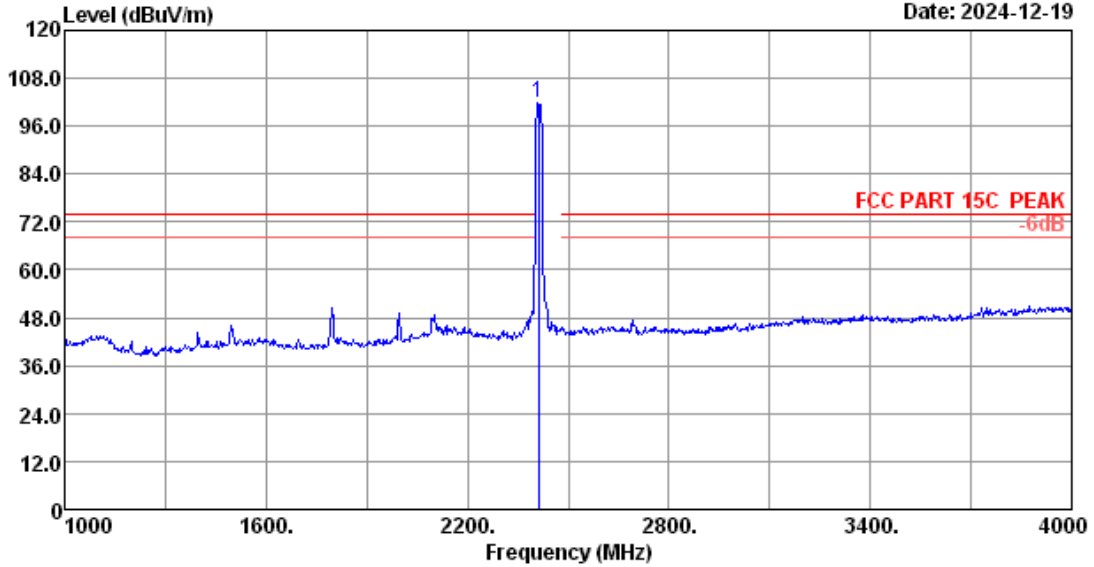


Site no. : 3m Chamber Data no. : 55
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2412 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.70	5.23	100.50	31.69	101.74	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

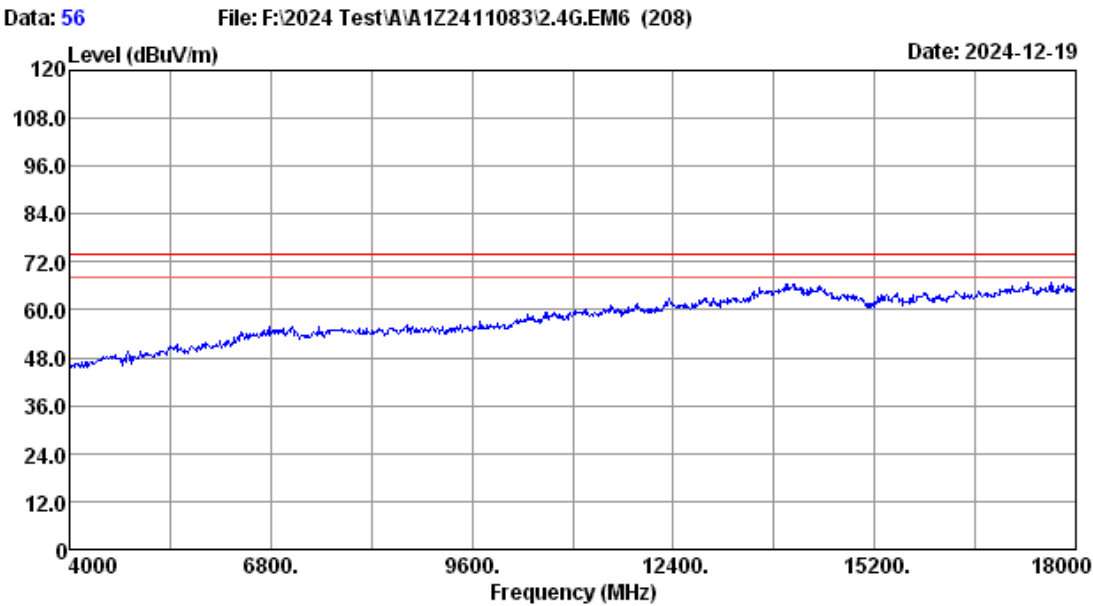


Site no.	: 3m Chamber	Data no.	: 56
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11g 2412 TX mode S1		

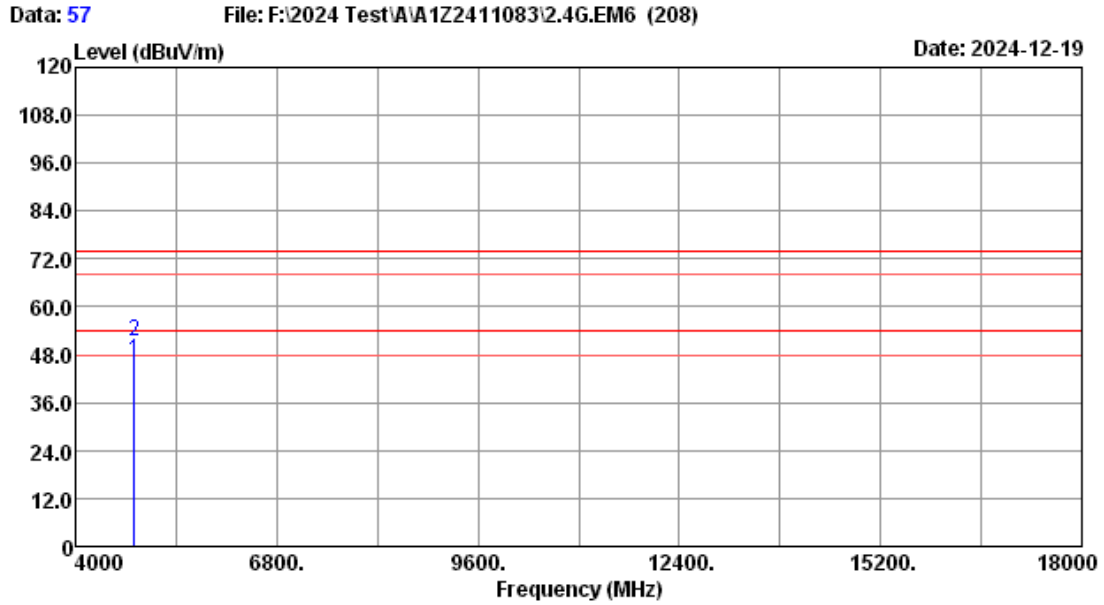

Site no. : 3m Chamber Data no. : 57
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2412 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.30	7.15	38.56	30.42	46.59	54.00	7.41	Average
2	4824.00	31.30	7.15	43.35	30.42	51.38	74.00	22.62	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

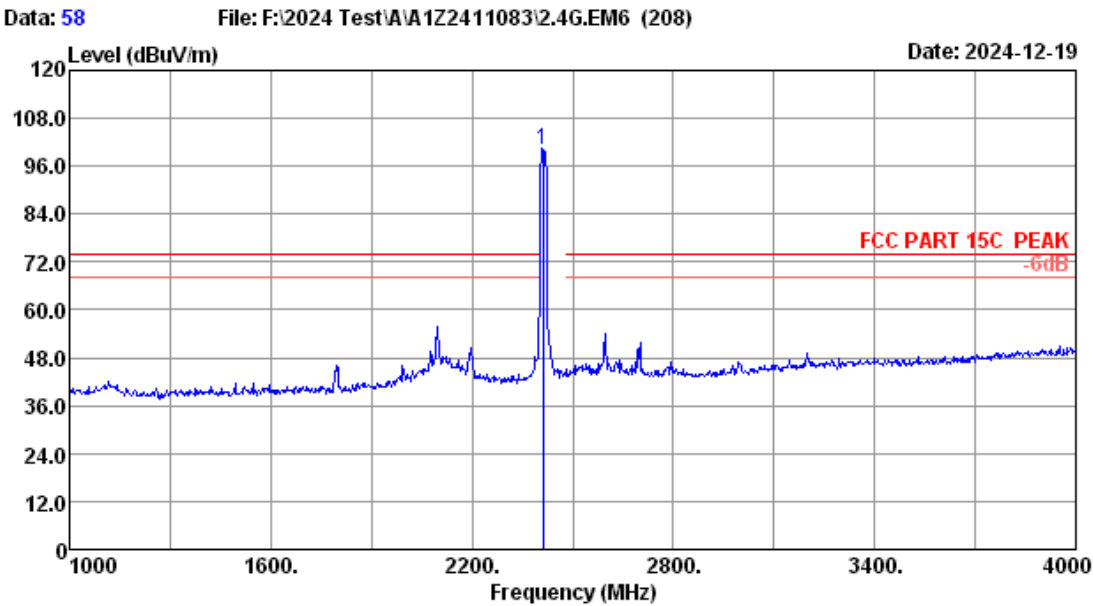


Site no. : 3m Chamber Data no. : 58
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.2°C/52.5% Engineer : Evan
Power rating :
Test Mode : 2.4G 11g 2412 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.70	5.23	98.98	31.69	100.22	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

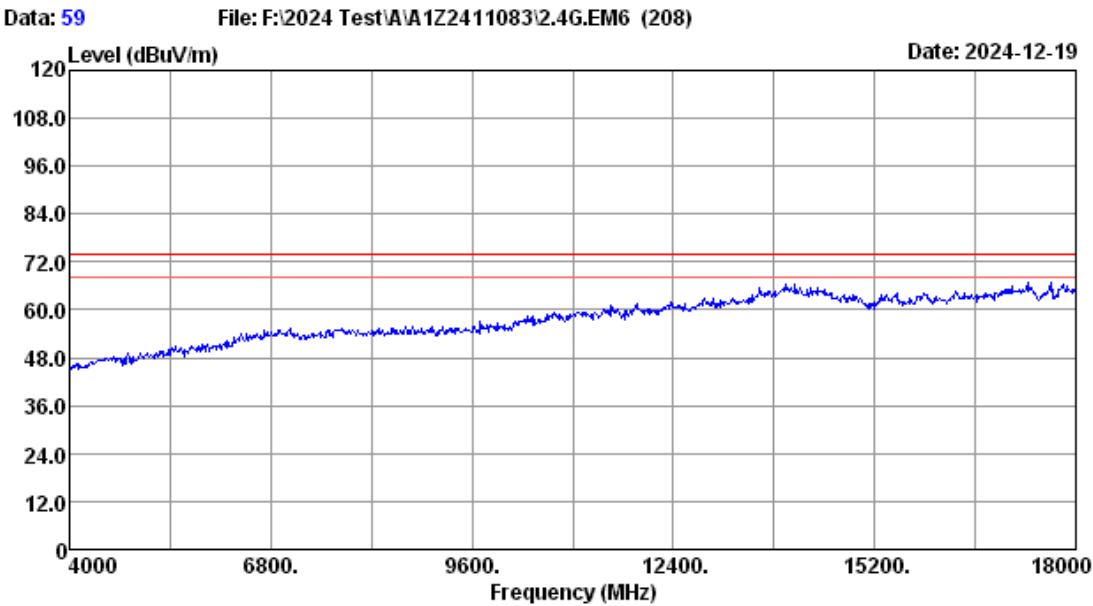


Site no.	: 3m Chamber	Data no.	: 59
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11g 2412 TX mode S1		

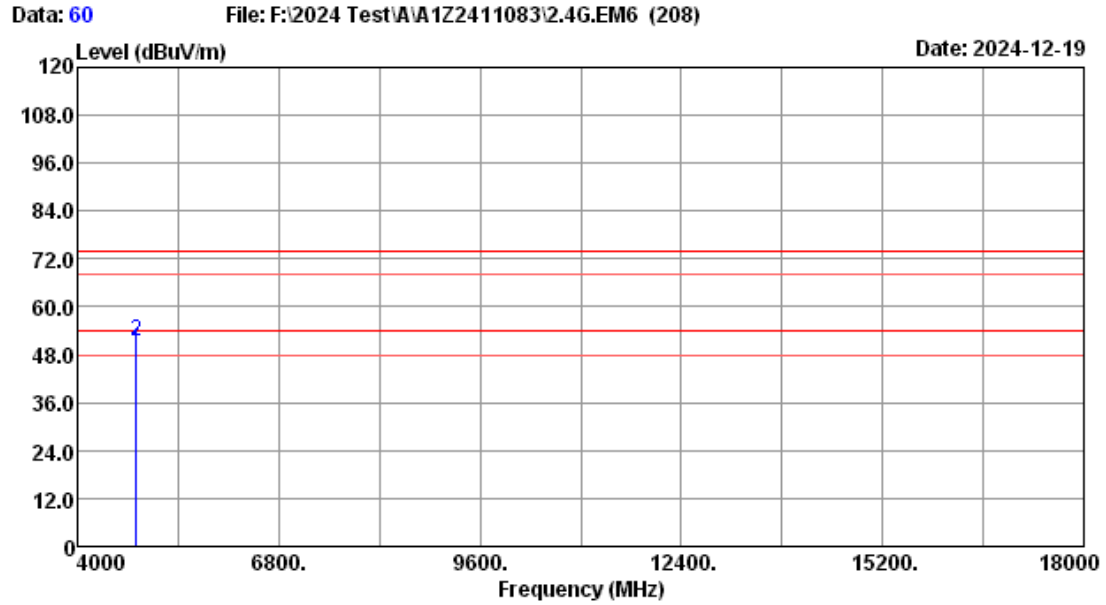

Site no. : 3m Chamber Data no. : 60
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2412 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.30	7.15	40.97	30.42	49.00	54.00	5.00	Average
2	4824.00	31.30	7.15	43.35	30.42	51.38	74.00	22.62	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

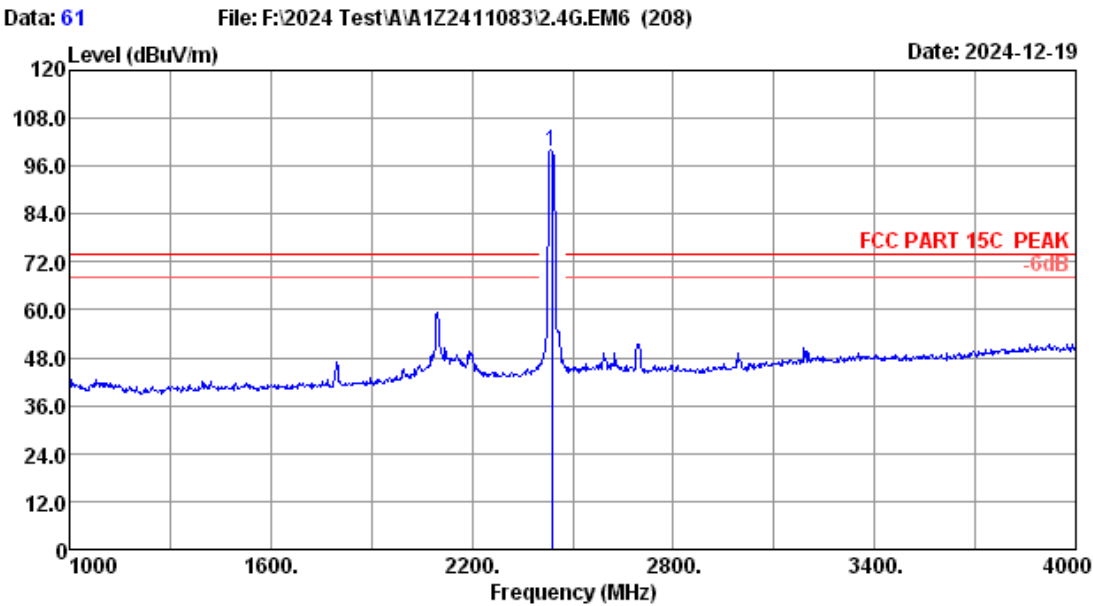


Site no.	: 3m Chamber	Data no.	: 61
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11g 2437 TX mode S1		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.70	5.25	98.49	31.68	99.76	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

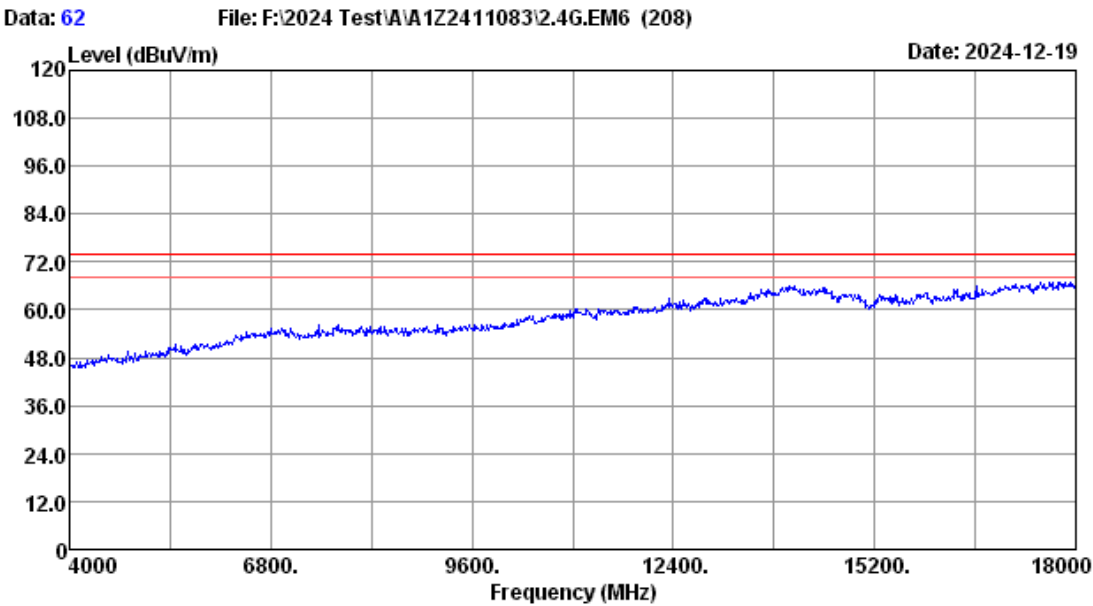


Site no.	: 3m Chamber	Data no.	: 62
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11g 2437 TX mode S1		

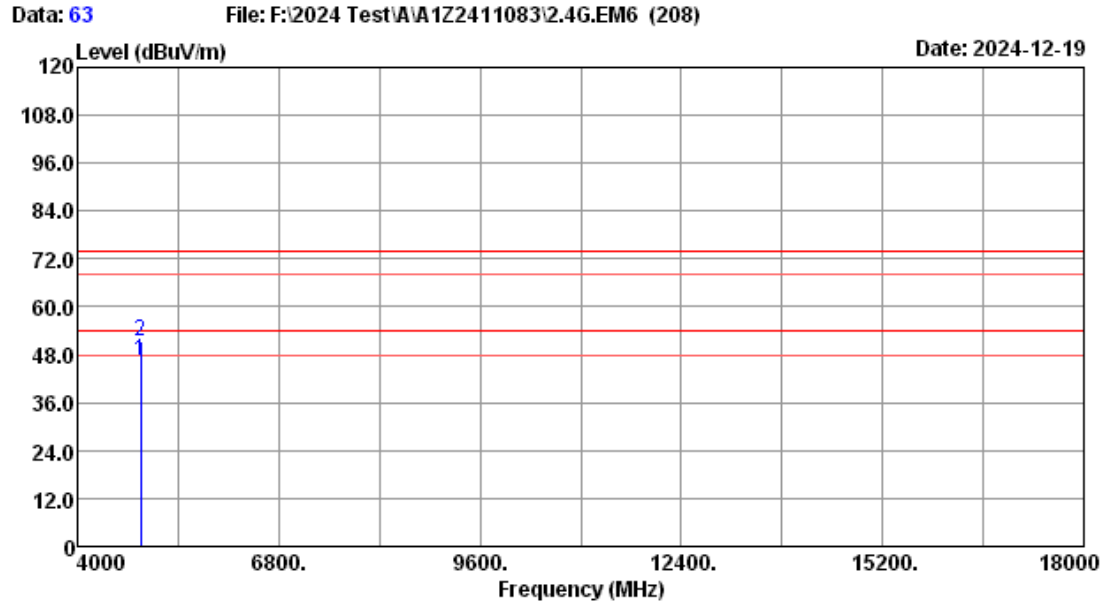

Site no. : 3m Chamber Data no. : 63
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2437 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.35	7.18	38.47	30.41	46.59	54.00	7.41	Average
2	4874.00	31.35	7.18	43.37	30.41	51.49	74.00	22.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

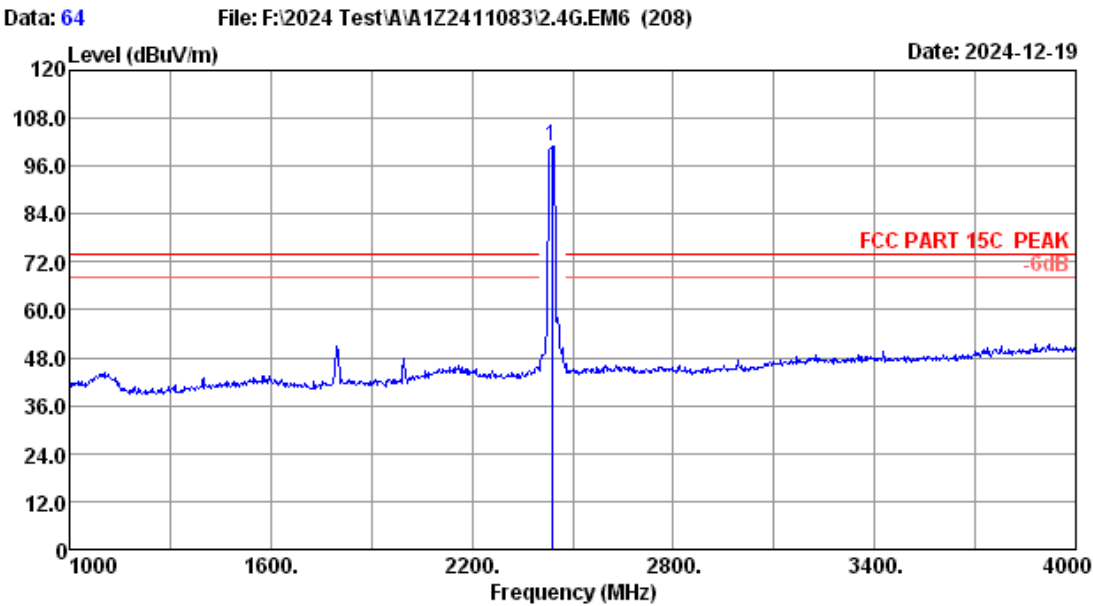


Site no.	: 3m Chamber	Data no.	: 64
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11g 2437 TX mode S1		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.70	5.25	99.58	31.68	100.85	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

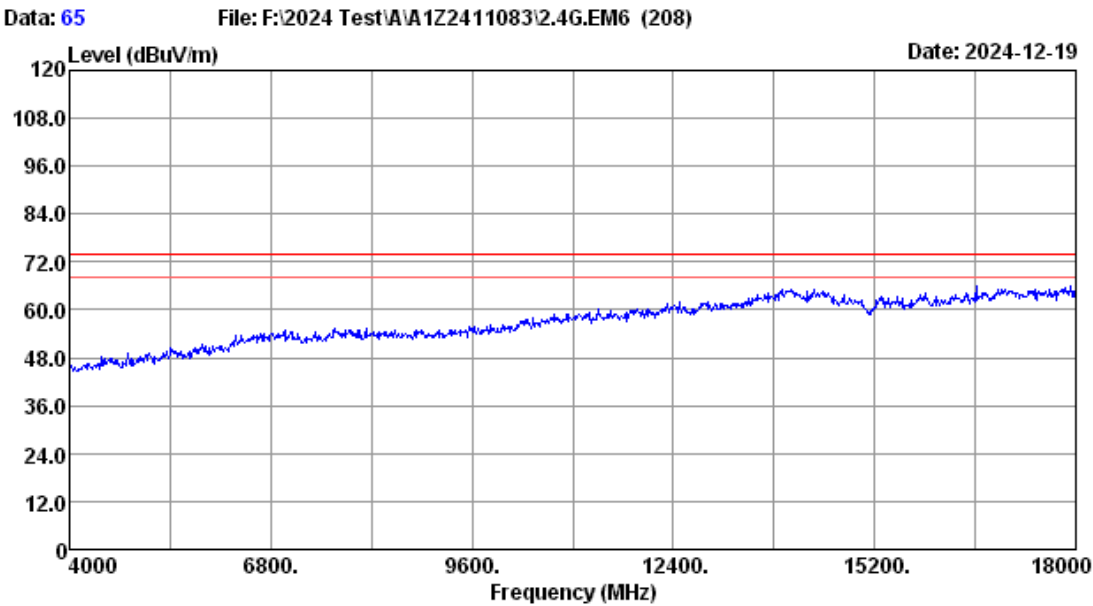

Site no.	: 3m Chamber	Data no.	: 65
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11g 2437 TX mode S1		

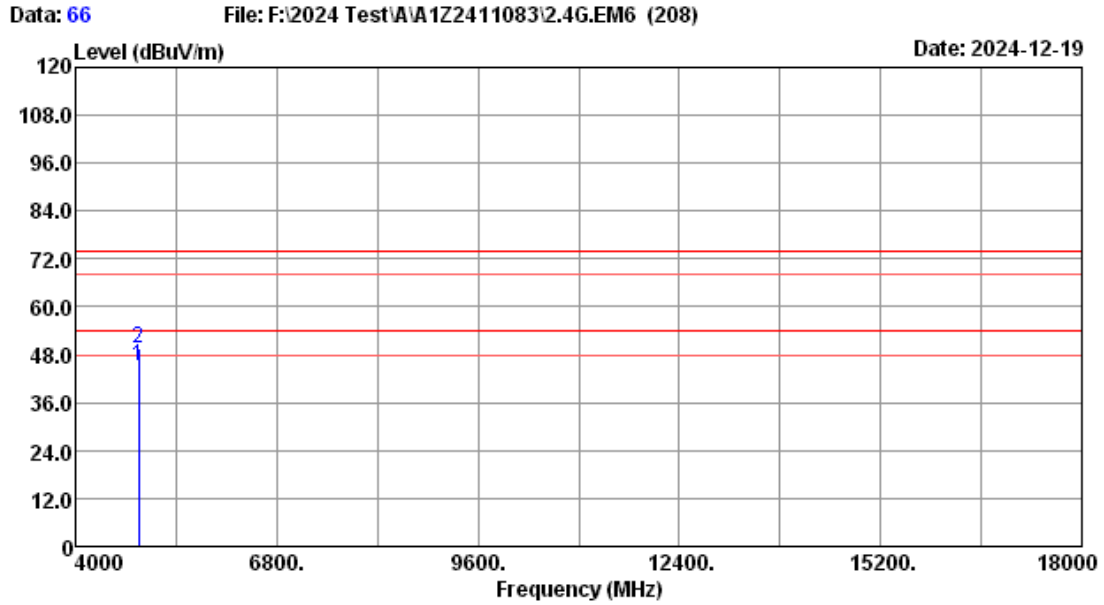


Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2437 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.35	7.18	36.96	30.41	45.08	54.00	8.92	Average
2	4874.00	31.35	7.18	41.29	30.41	49.41	74.00	24.59	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.


FCC ID: HLZGW1541P

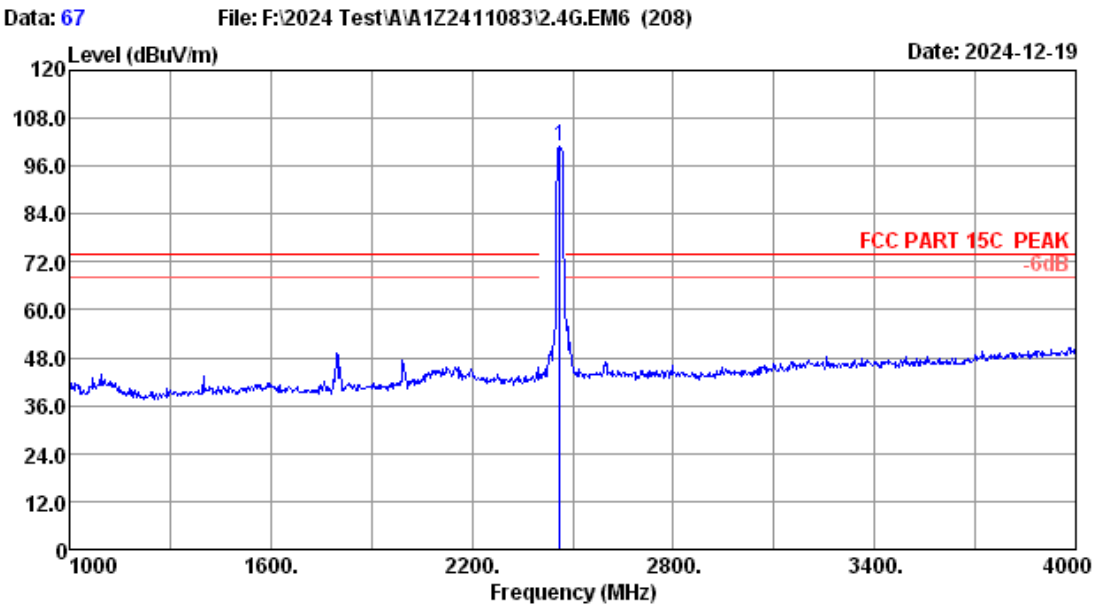


Site no. : 3m Chamber Data no. : 67
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2462 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.75	5.29	99.61	31.67	100.98	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

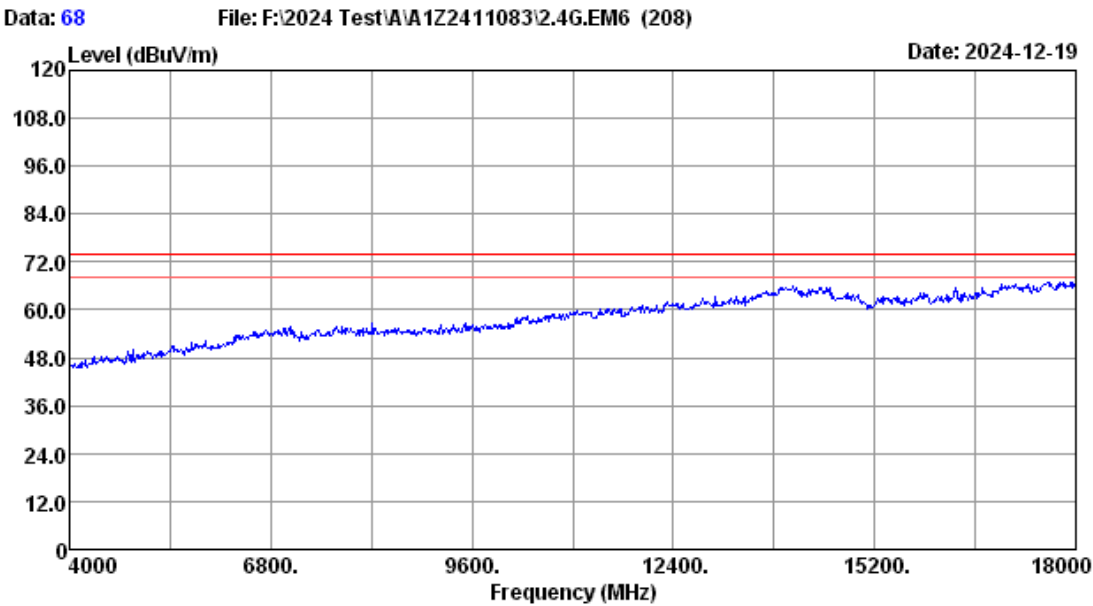


Site no.	: 3m Chamber	Data no.	: 68
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11g 2462 TX mode S1		

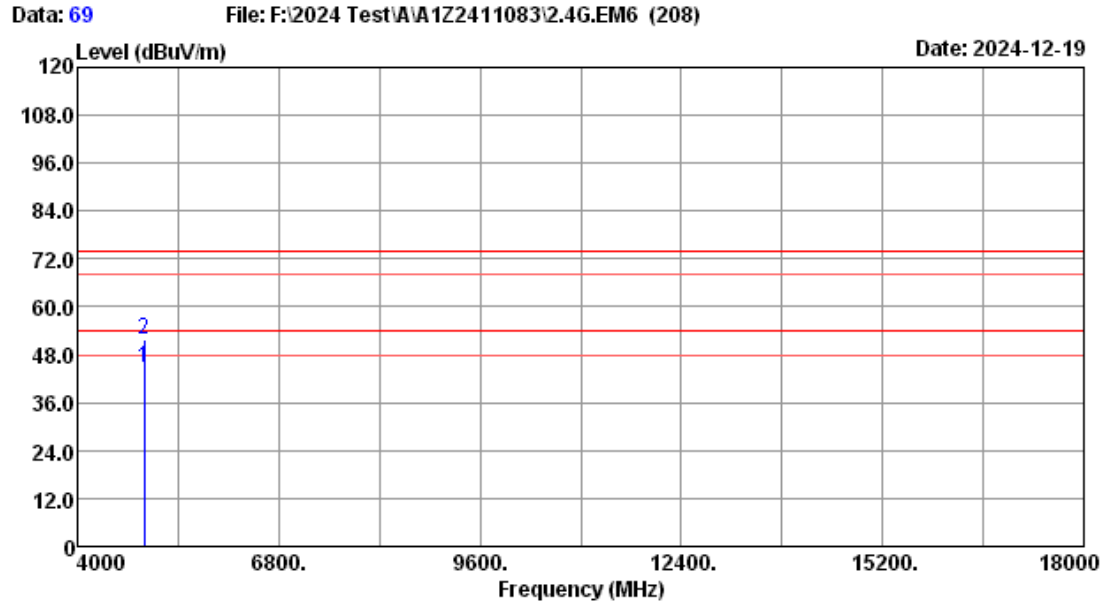

Site no. : 3m Chamber Data no. : 69
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2462 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.59	7.21	36.49	30.41	44.88	54.00	9.12	Average
2	4924.00	31.59	7.21	43.24	30.41	51.63	74.00	22.37	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

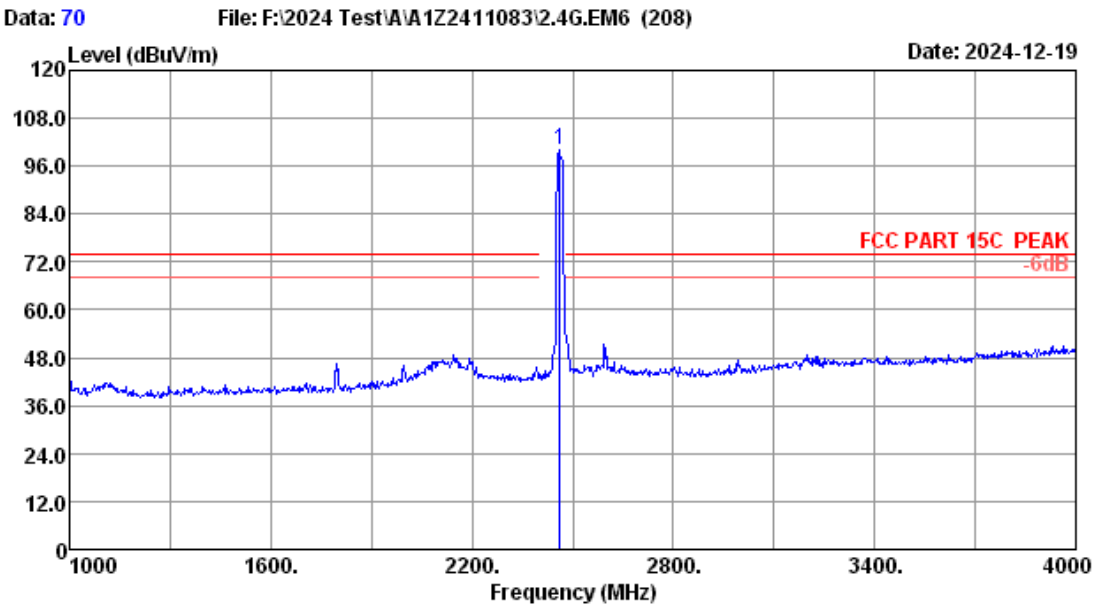


Site no.	: 3m Chamber	Data no.	: 70
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11g 2462 TX mode S1		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.75	5.29	98.49	31.67	99.86	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

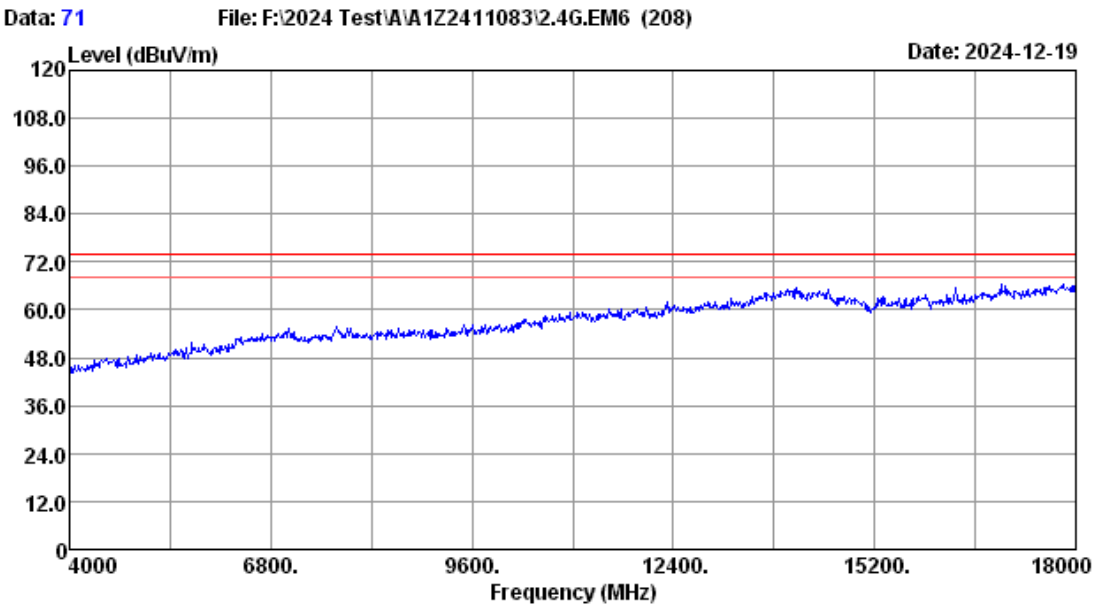

Site no.	: 3m Chamber	Data no.	: 71
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11g 2462 TX mode S1		

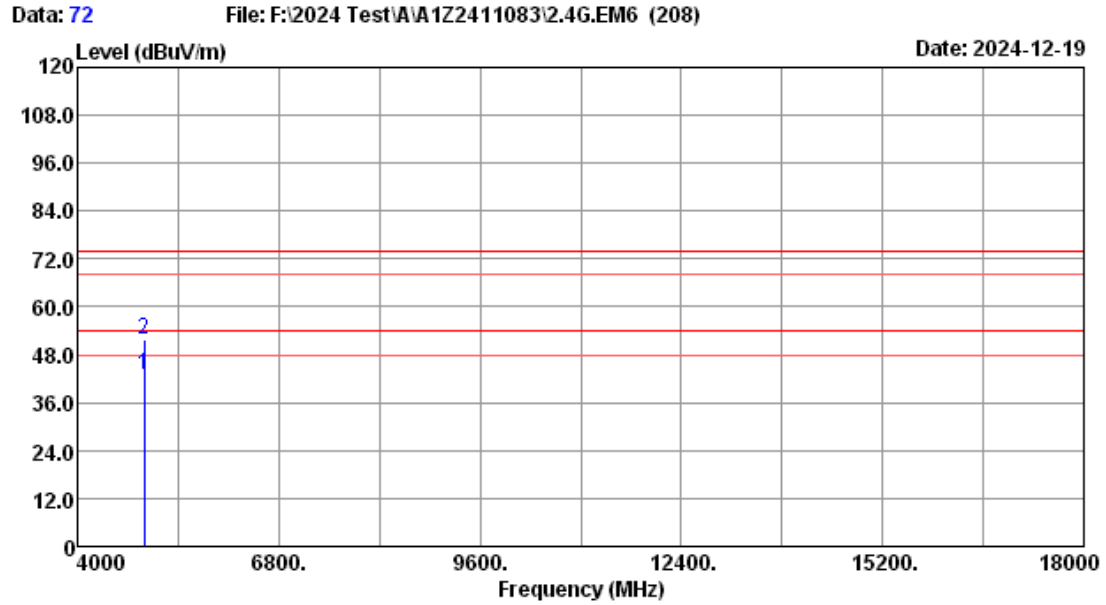


Site no. : 3m Chamber Data no. : 72
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2462 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.59	7.21	34.59	30.41	42.98	54.00	11.02	Average
2	4924.00	31.59	7.21	43.24	30.41	51.63	74.00	22.37	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.


MIMO Mode 11n20

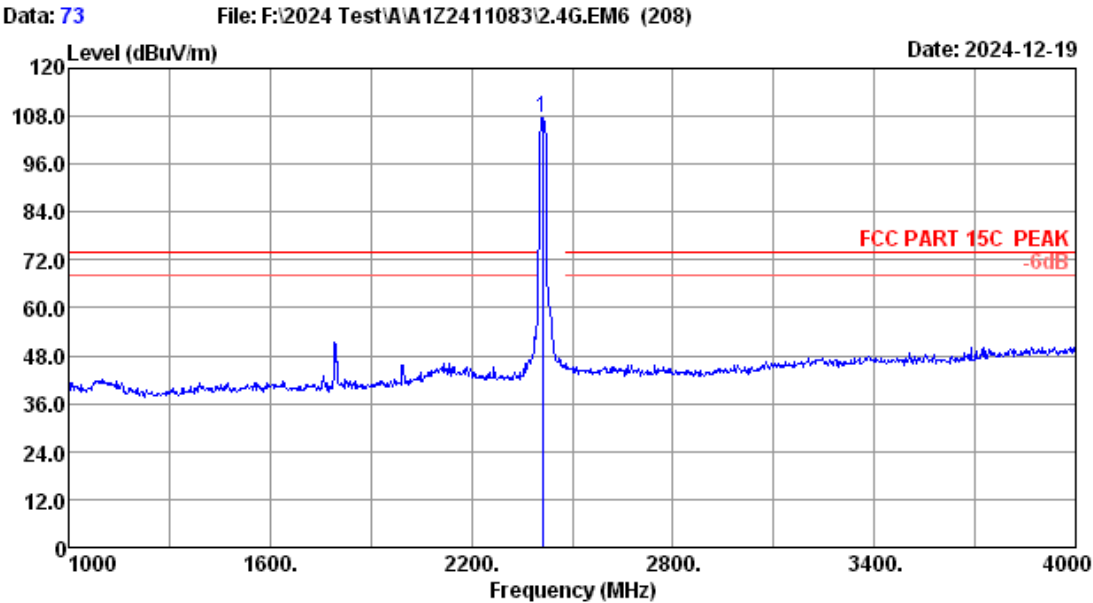


Site no. : 3m Chamber Data no. : 73
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n 2412 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.70	5.23	106.19	31.69	107.43	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

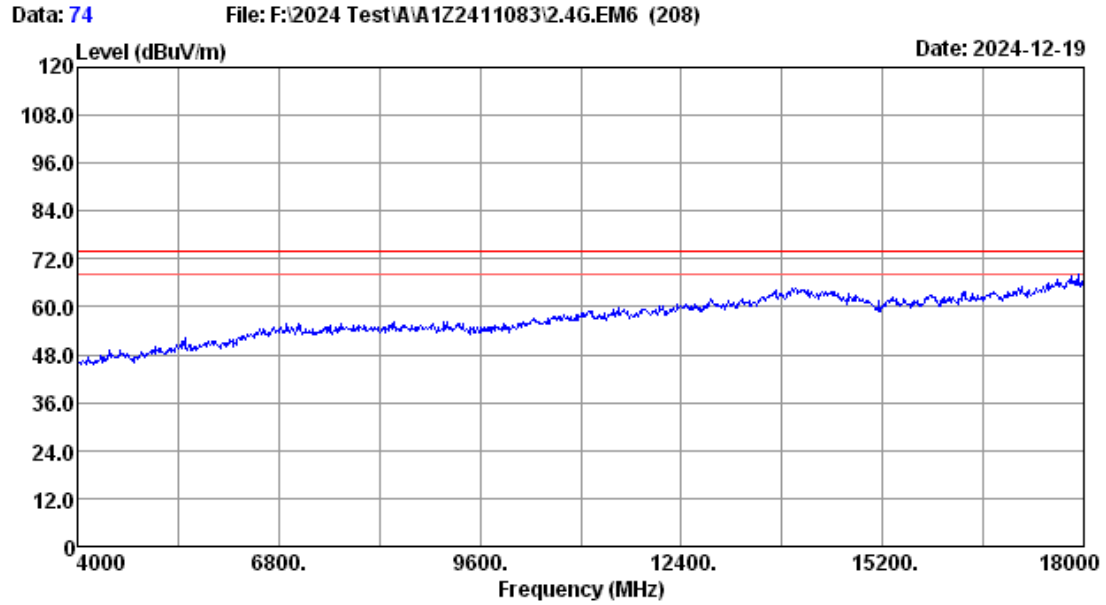


Site no.	: 3m Chamber	Data no.	: 74
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11n 2412 TX mode MIMO		

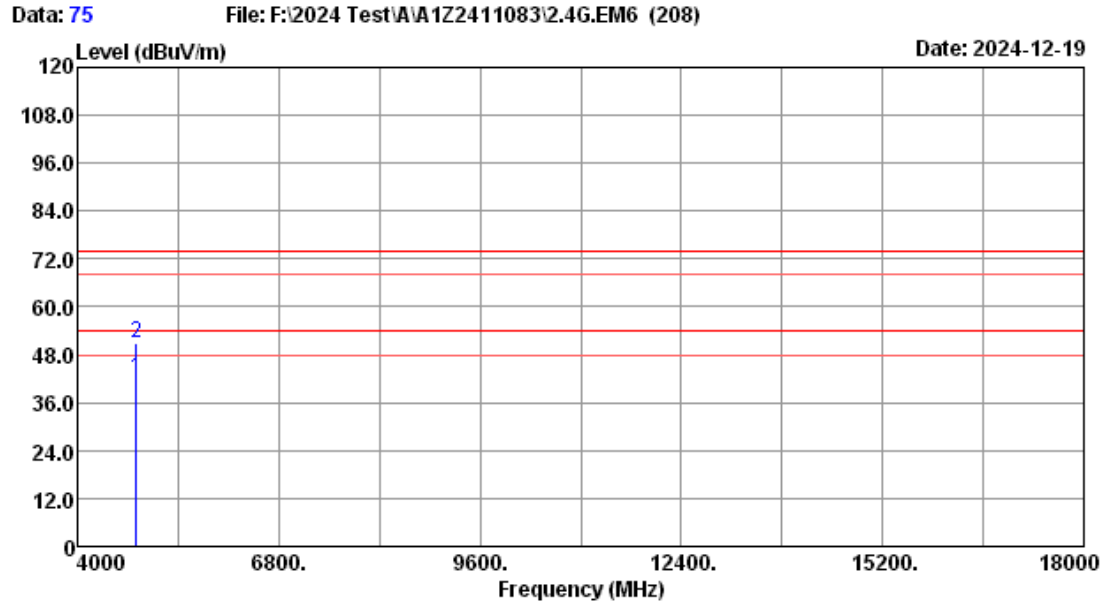

Site no. : 3m Chamber Data no. : 75
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n 2412 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.30	7.15	34.10	30.42	42.13	54.00	11.87	Average
2	4824.00	31.30	7.15	42.70	30.42	50.73	74.00	23.27	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

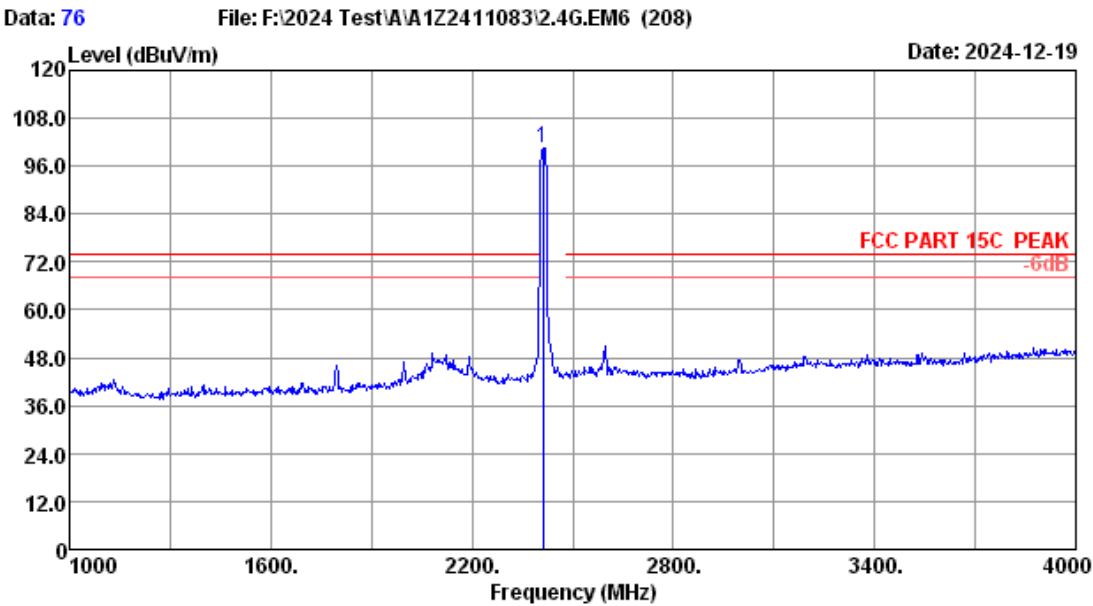


Site no. : 3m Chamber Data no. : 76
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n 2412 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.70	5.23	99.24	31.69	100.48	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

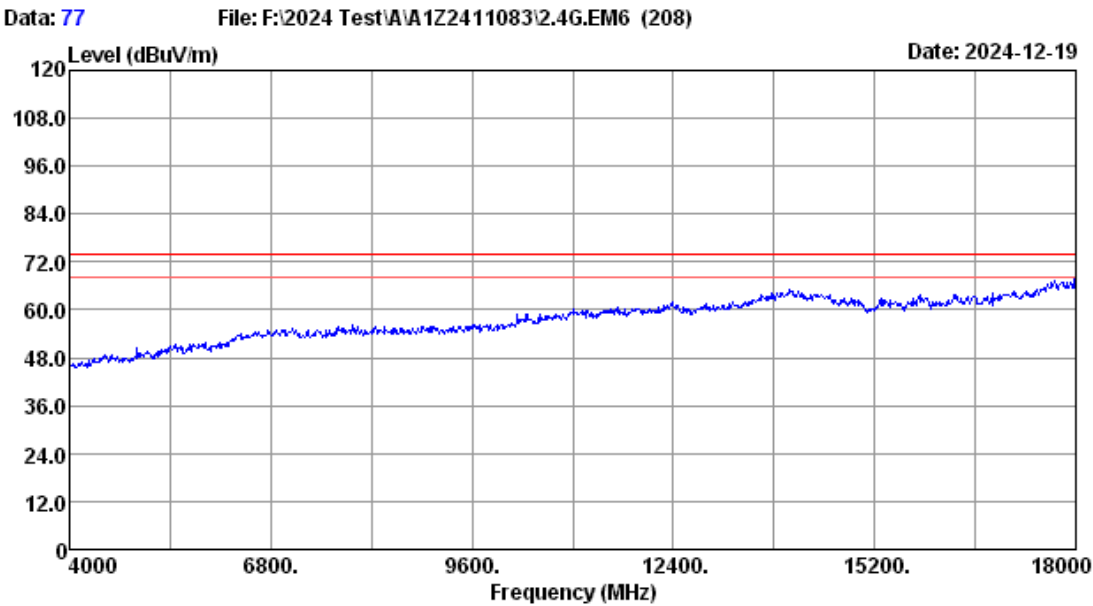


Site no.	: 3m Chamber	Data no.	: 77
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11n 2412 TX mode MIMO		

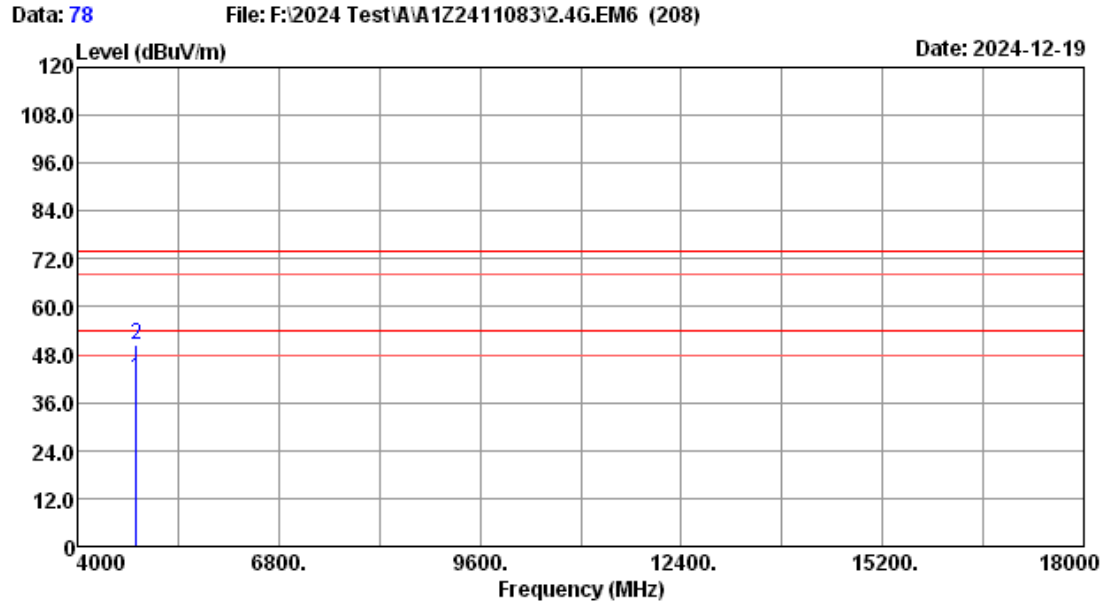

Site no. : 3m Chamber Data no. : 78
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n 2412 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.30	7.15	34.25	30.42	42.28	54.00	11.72	Average
2	4824.00	31.30	7.15	42.32	30.42	50.35	74.00	23.65	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

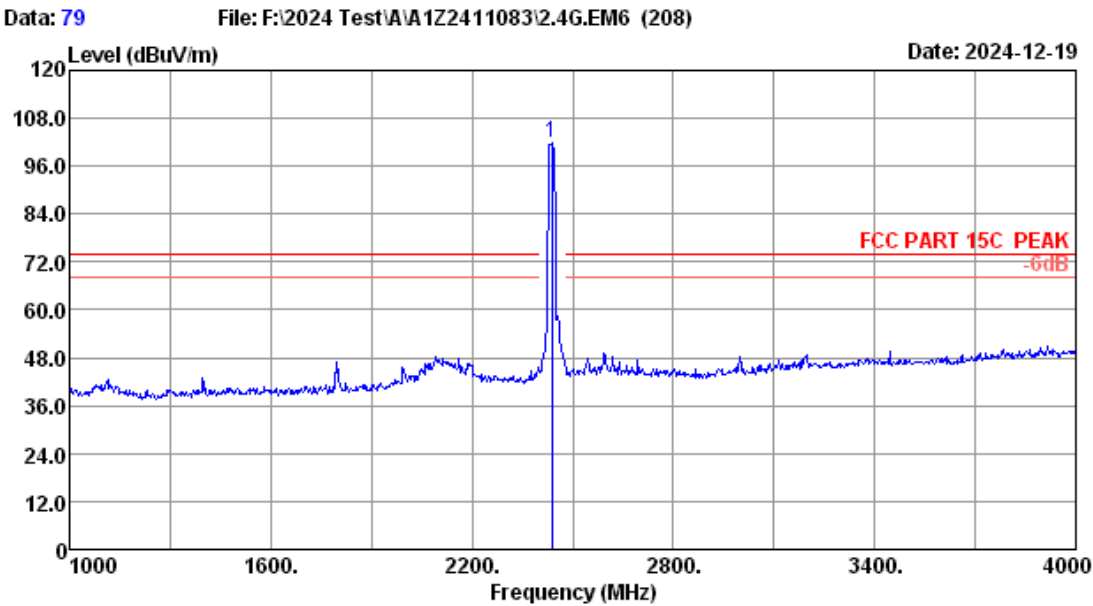


Site no. : 3m Chamber Data no. : 79
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n 2437 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.70	5.25	100.44	31.68	101.71	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

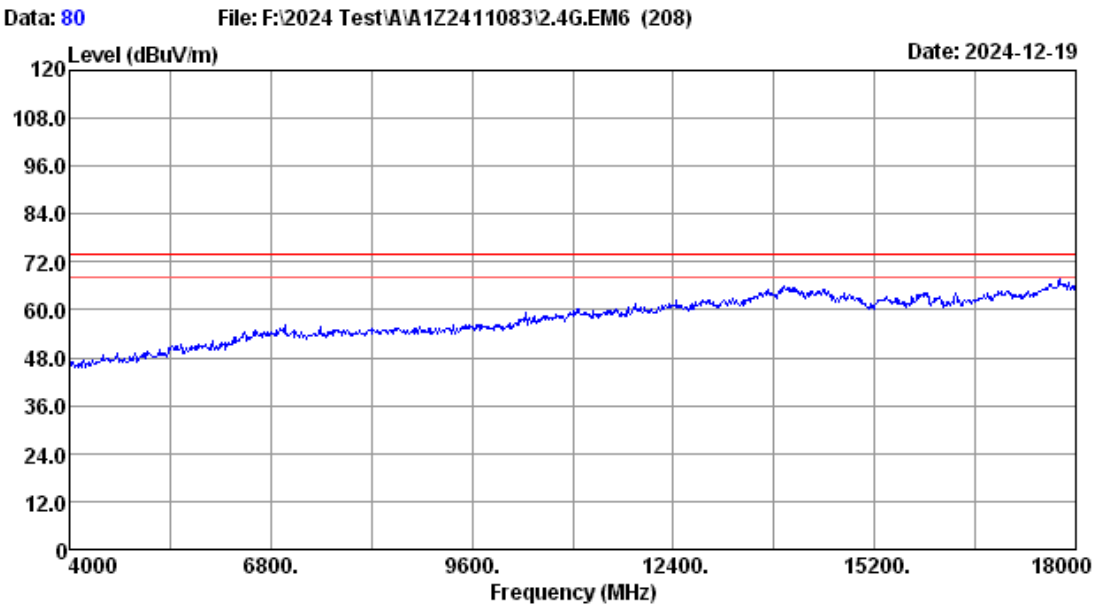


Site no.	: 3m Chamber	Data no.	: 80
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11n 2437 TX mode MIMO		

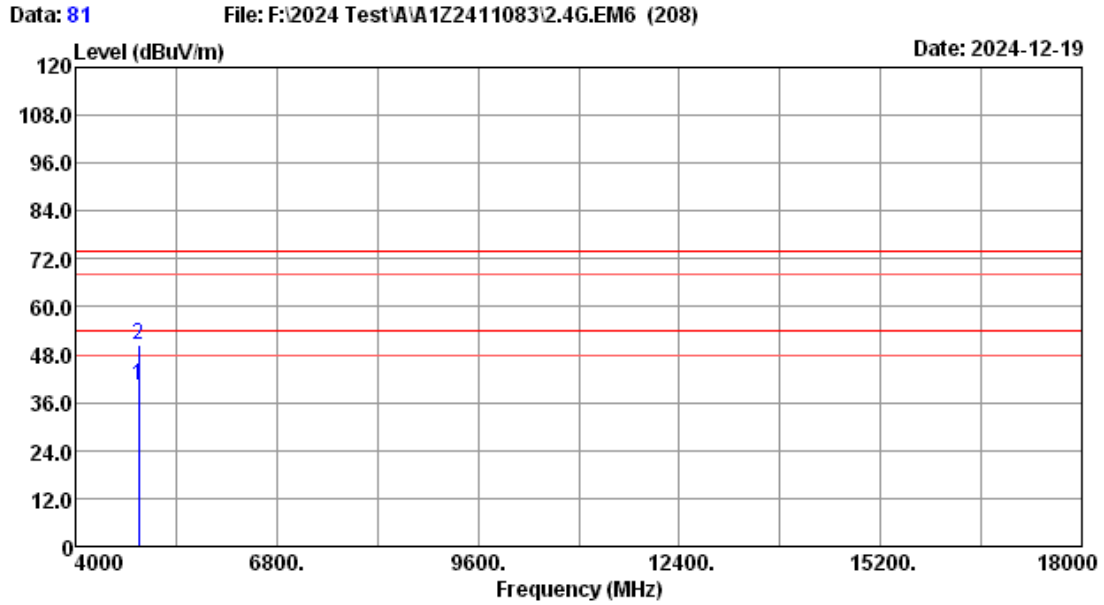

Site no. : 3m Chamber Data no. : 81
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n 2437 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.35	7.18	32.15	30.41	40.27	54.00	13.73	Average
2	4874.00	31.35	7.18	42.32	30.41	50.44	74.00	23.56	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

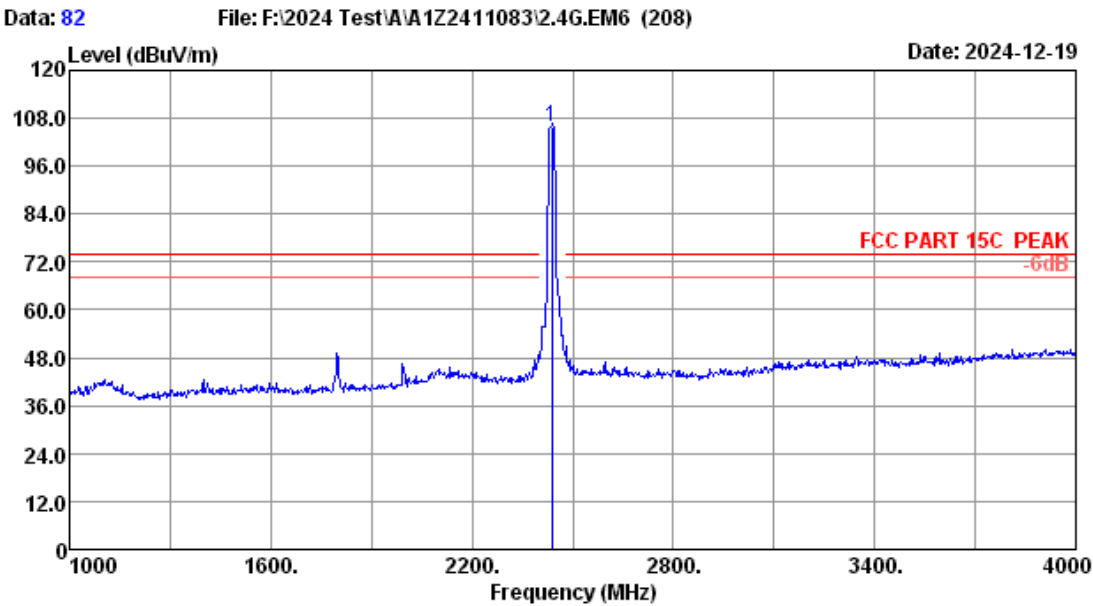


Site no.	: 3m Chamber	Data no.	: 82
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11n 2437 TX mode MIMO		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.70	5.25	104.74	31.68	106.01	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

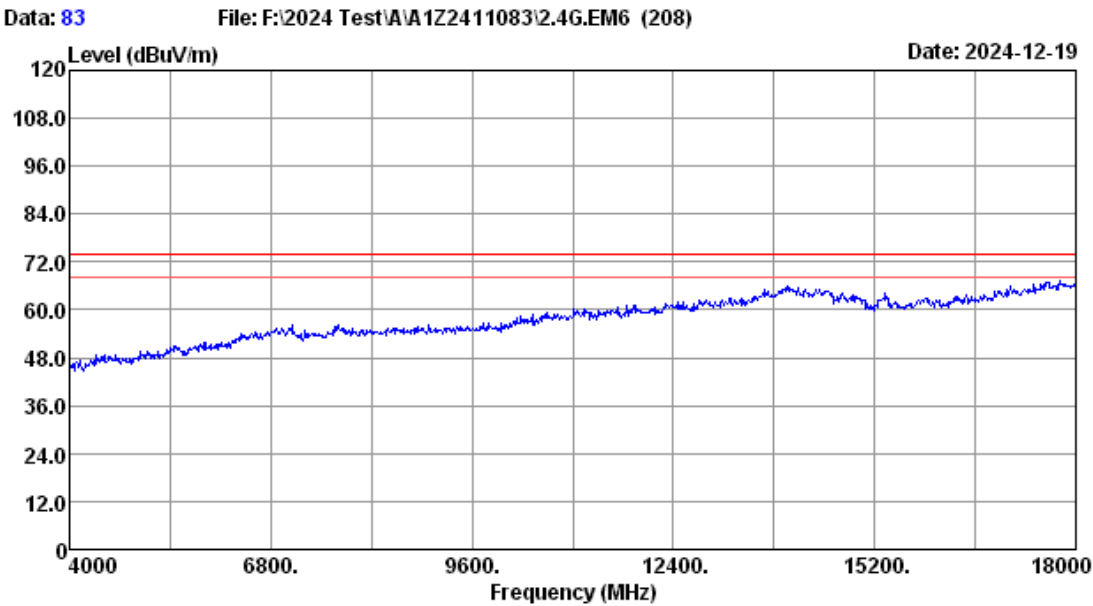


Site no.	: 3m Chamber	Data no.	: 83
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11n 2437 TX mode MIMO		

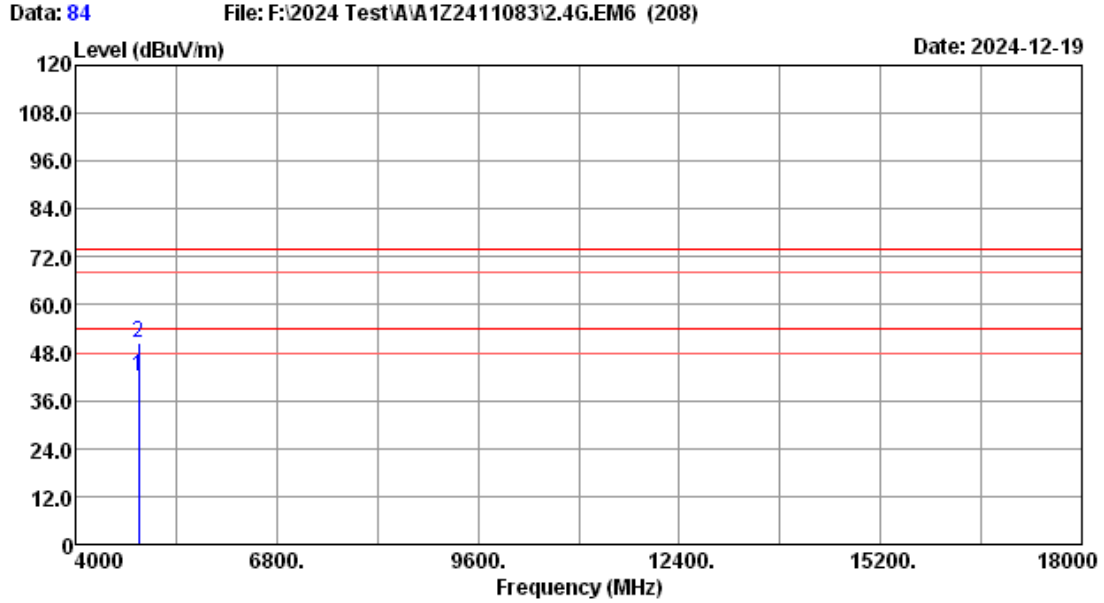

Site no. : 3m Chamber Data no. : 84
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n 2437 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.35	7.18	33.81	30.41	41.93	54.00	12.07	Average
2	4874.00	31.35	7.18	42.51	30.41	50.63	74.00	23.37	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

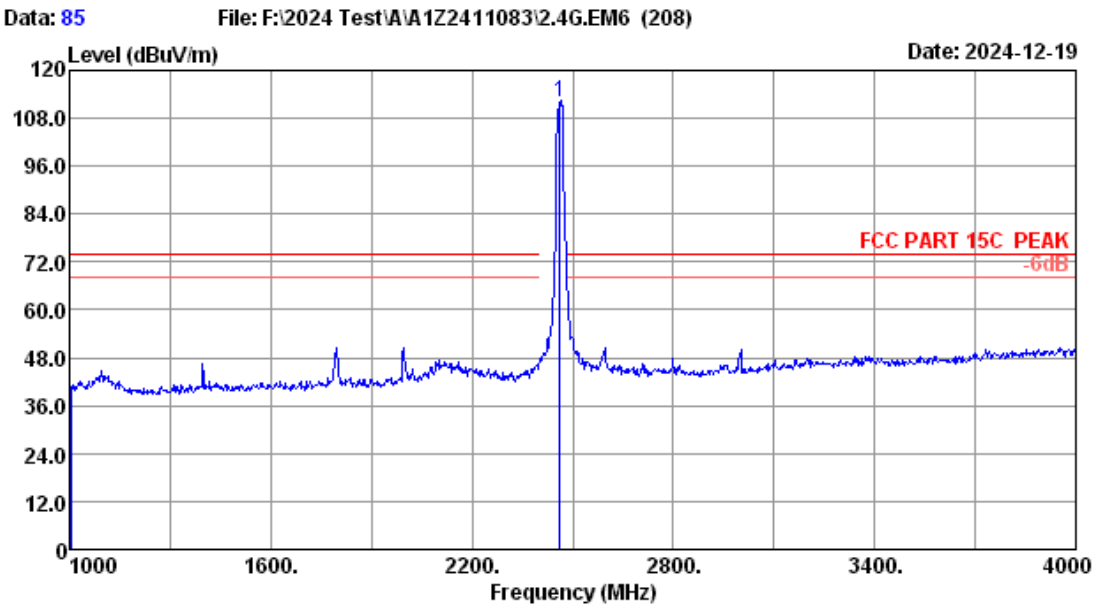


Site no. : 3m Chamber Data no. : 85
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.2°C/52.5% Engineer : Evan
Power rating :
Test Mode : 2.4G 11n 2462 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.75	5.29	110.75	31.67	112.12	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

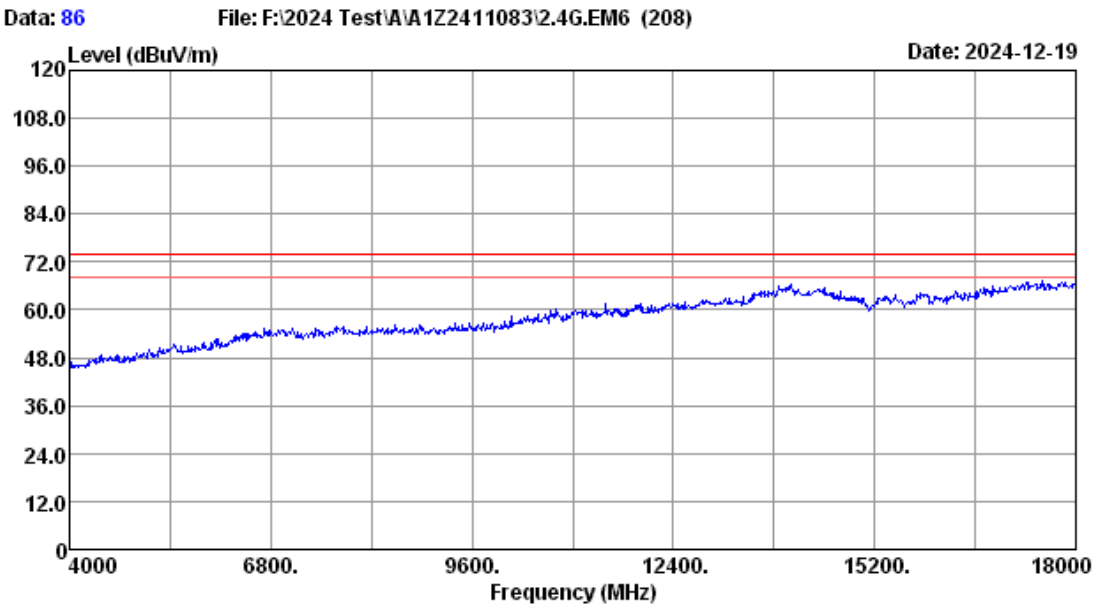


Site no.	: 3m Chamber	Data no.	: 86
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11n 2462 TX mode MIMO		

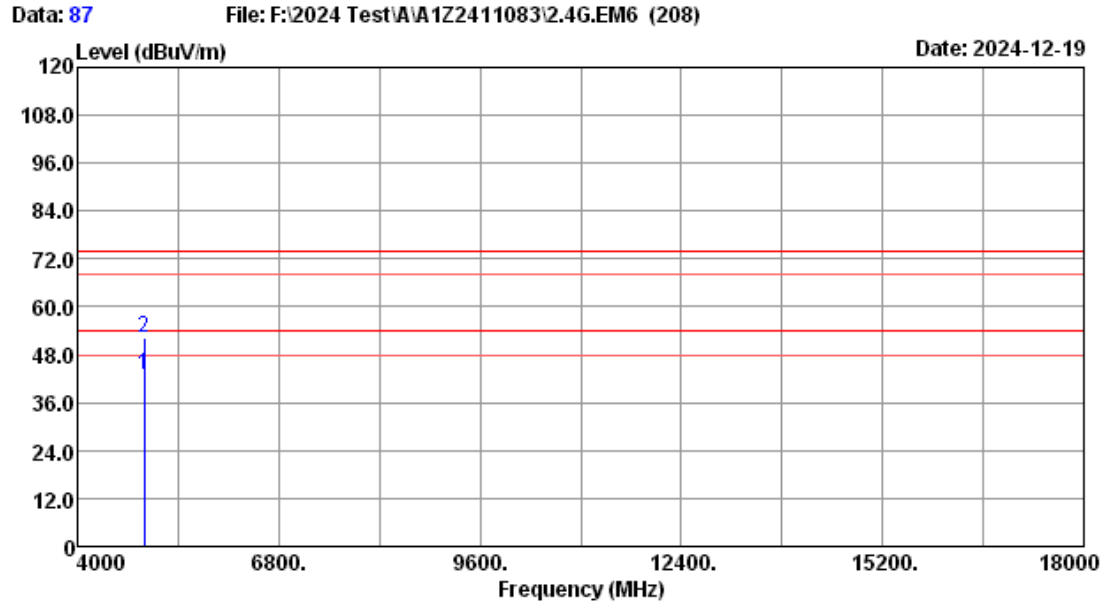

Site no. : 3m Chamber Data no. : 87
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n 2462 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.59	7.21	34.67	30.41	43.06	54.00	10.94	Average
2	4924.00	31.59	7.21	43.73	30.41	52.12	74.00	21.88	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

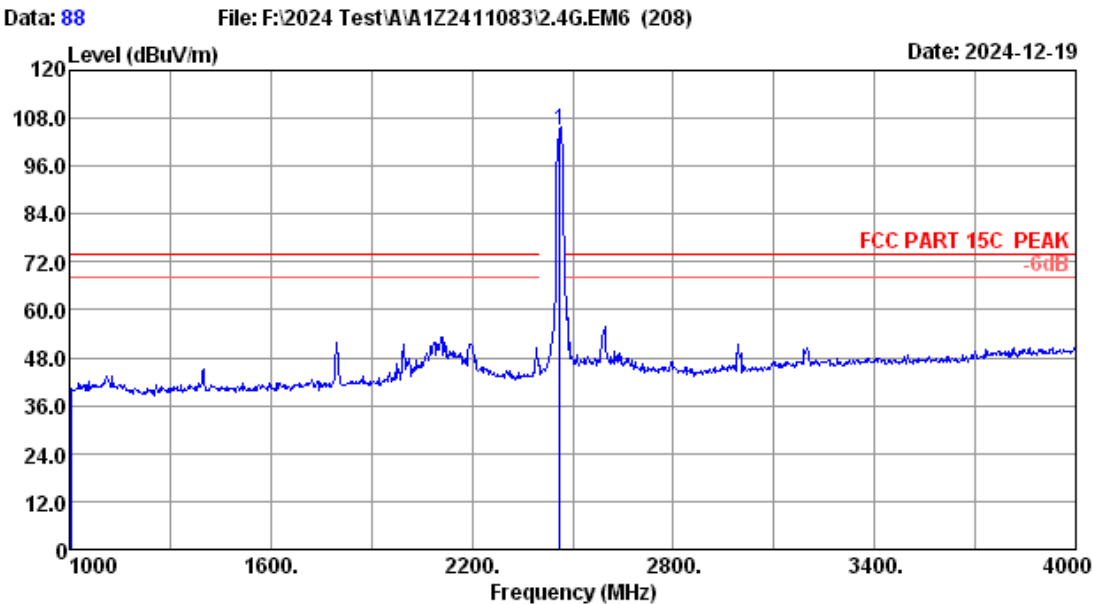


Site no. : 3m Chamber Data no. : 88
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n 2462 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.75	5.29	103.75	31.67	105.12	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

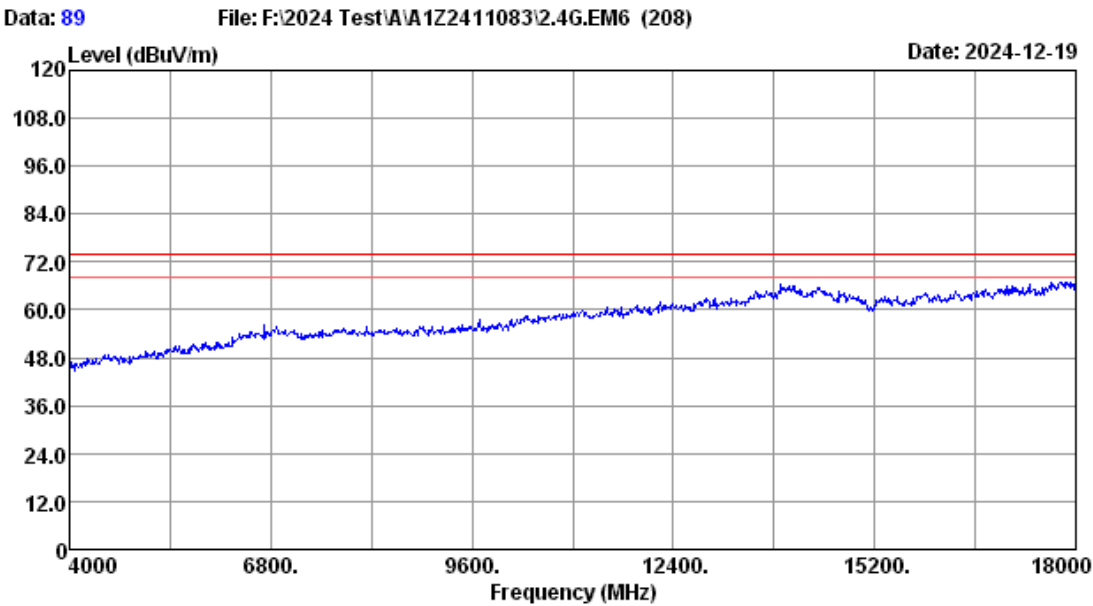

Site no.	: 3m Chamber	Data no.	: 89
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11n 2462 TX mode MIMO		

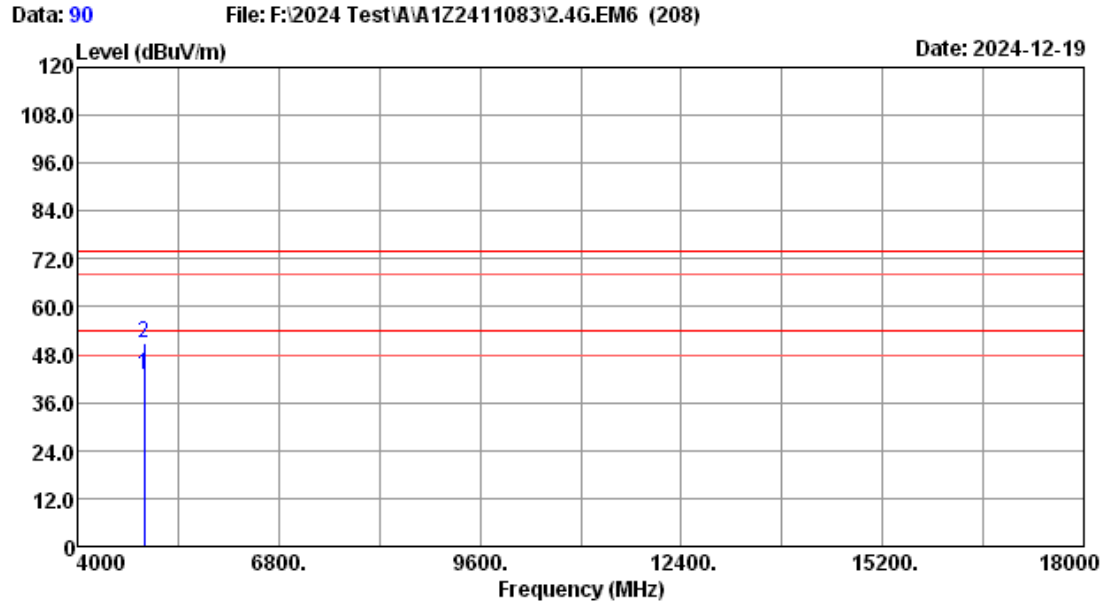


Site no. : 3m Chamber Data no. : 90
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n 2462 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.59	7.21	34.55	30.41	42.94	54.00	11.06	Average
2	4924.00	31.59	7.21	42.63	30.41	51.02	74.00	22.98	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.


MIMO Mode 11ax 20

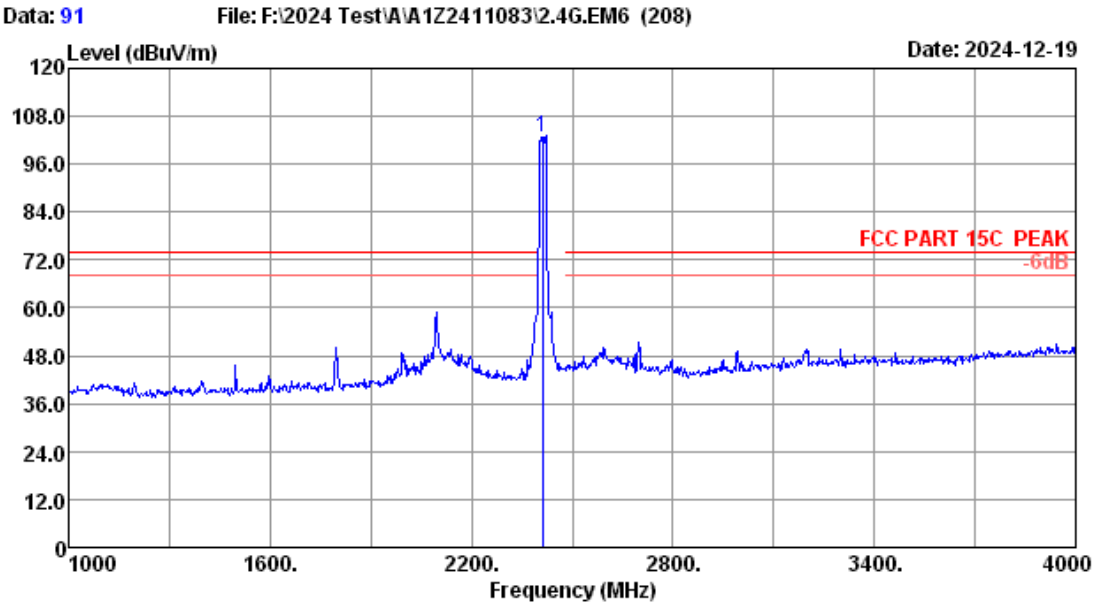


Site no. : 3m Chamber Data no. : 91
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax 2412 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.70	5.23	101.48	31.69	102.72	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

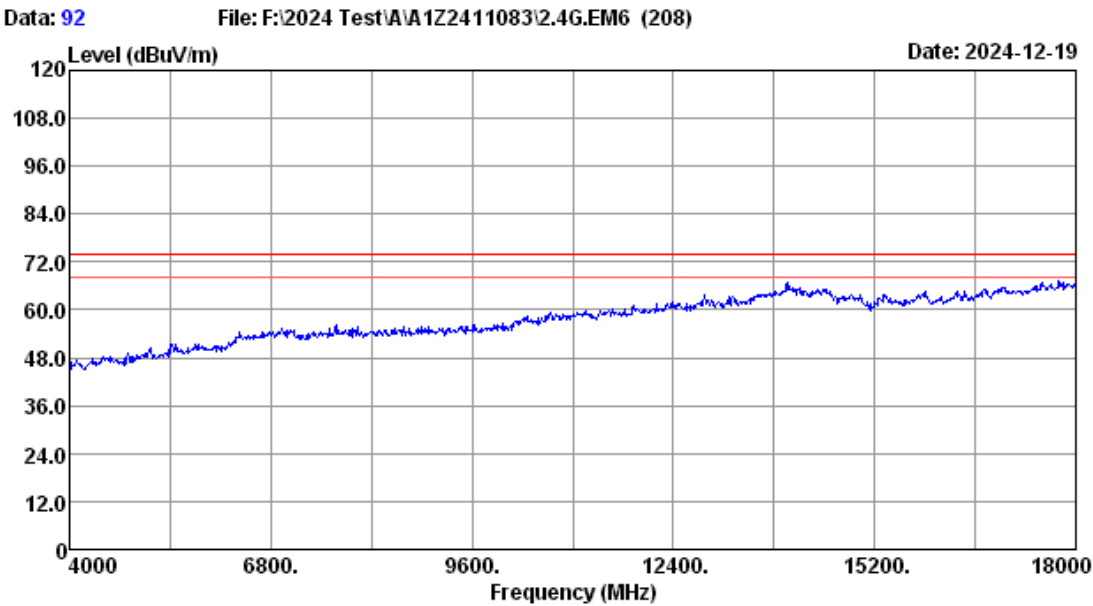


Site no.	: 3m Chamber	Data no.	: 92
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11ax 2412 TX mode MIMO		

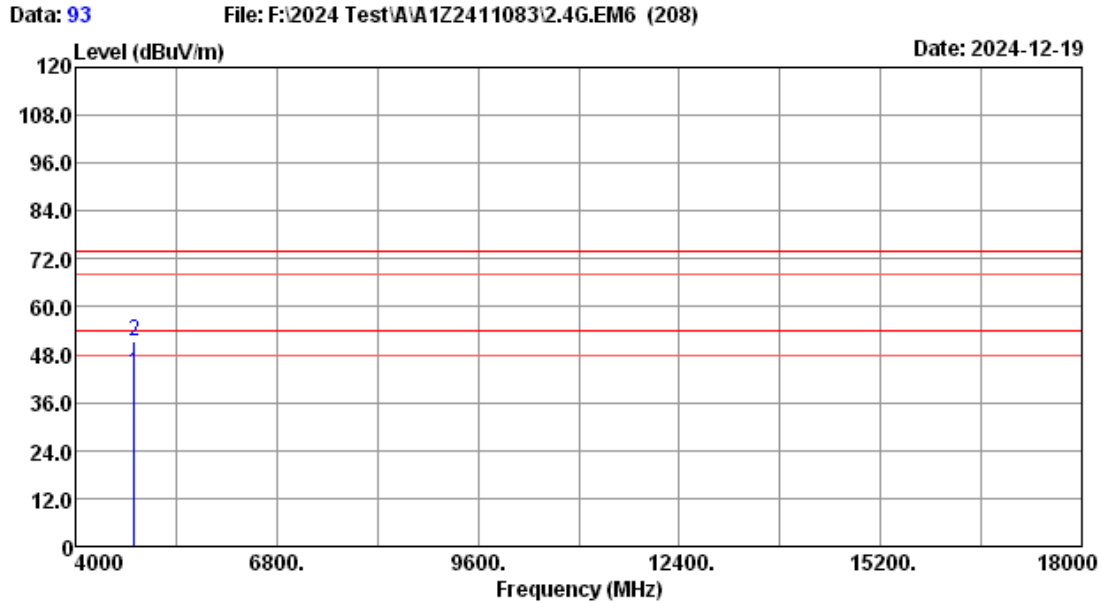

Site no. : 3m Chamber Data no. : 93
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax 2412 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.30	7.15	35.17	30.42	43.20	54.00	10.80	Average
2	4824.00	31.30	7.15	43.25	30.42	51.28	74.00	22.72	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

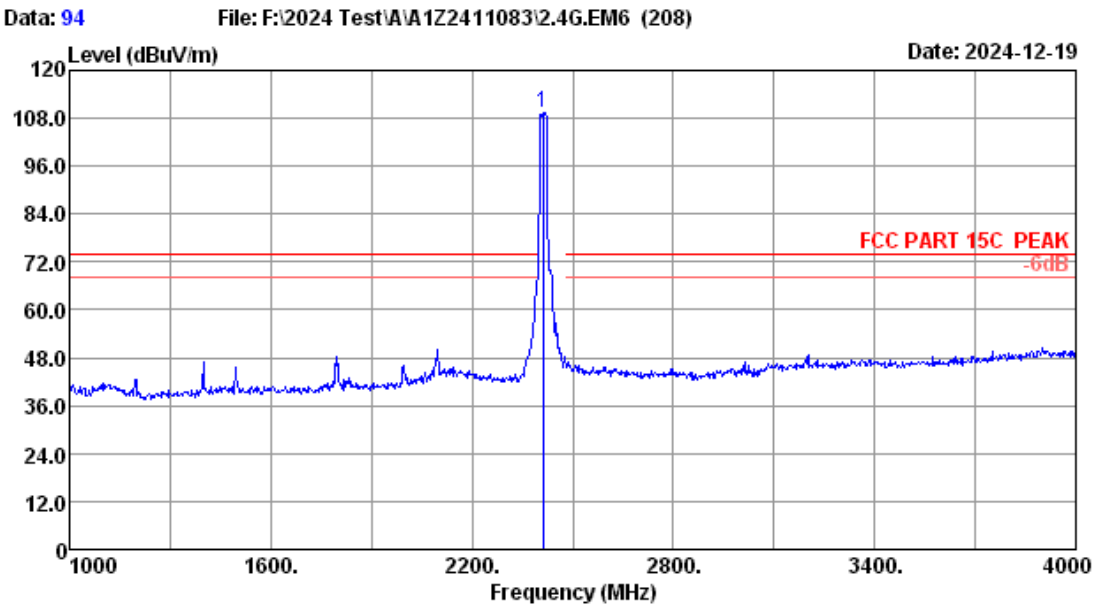


Site no. : 3m Chamber Data no. : 94
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax 2412 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2412.00	27.70	5.23	108.14	31.69	109.38	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

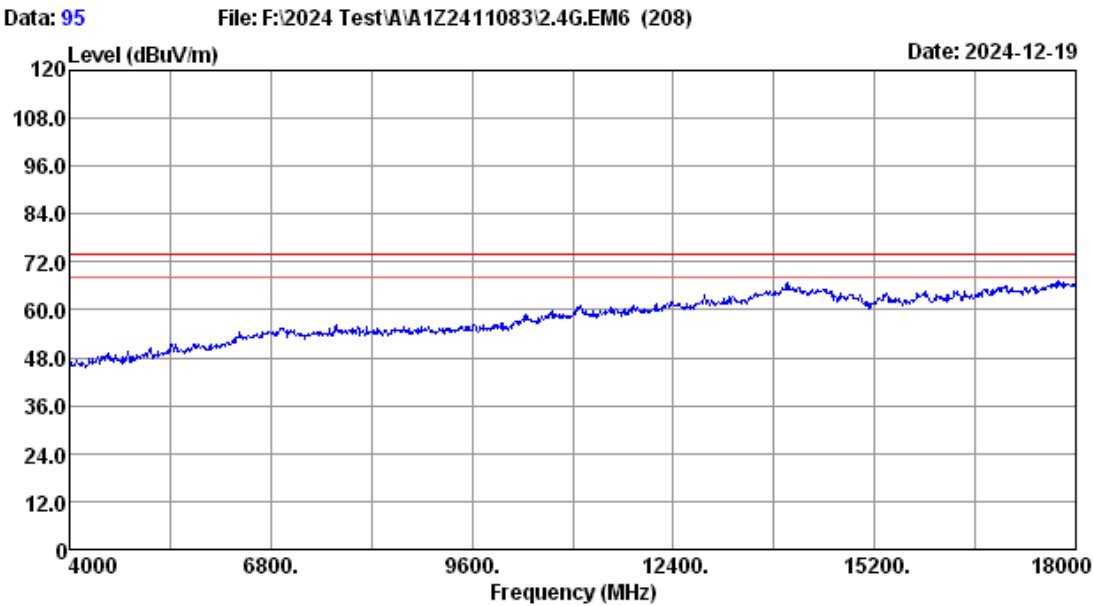


Site no.	: 3m Chamber	Data no.	: 95
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11ax 2412 TX mode MIMO		

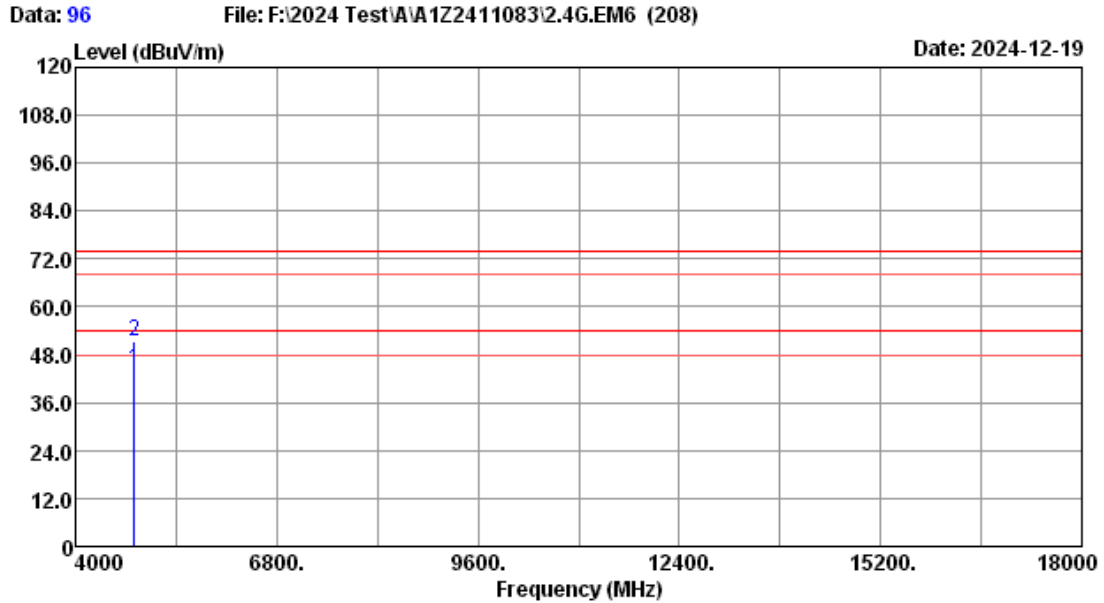

Site no. : 3m Chamber Data no. : 96
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax 2412 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.30	7.15	36.29	30.42	44.32	54.00	9.68	Average
2	4824.00	31.30	7.15	43.25	30.42	51.28	74.00	22.72	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

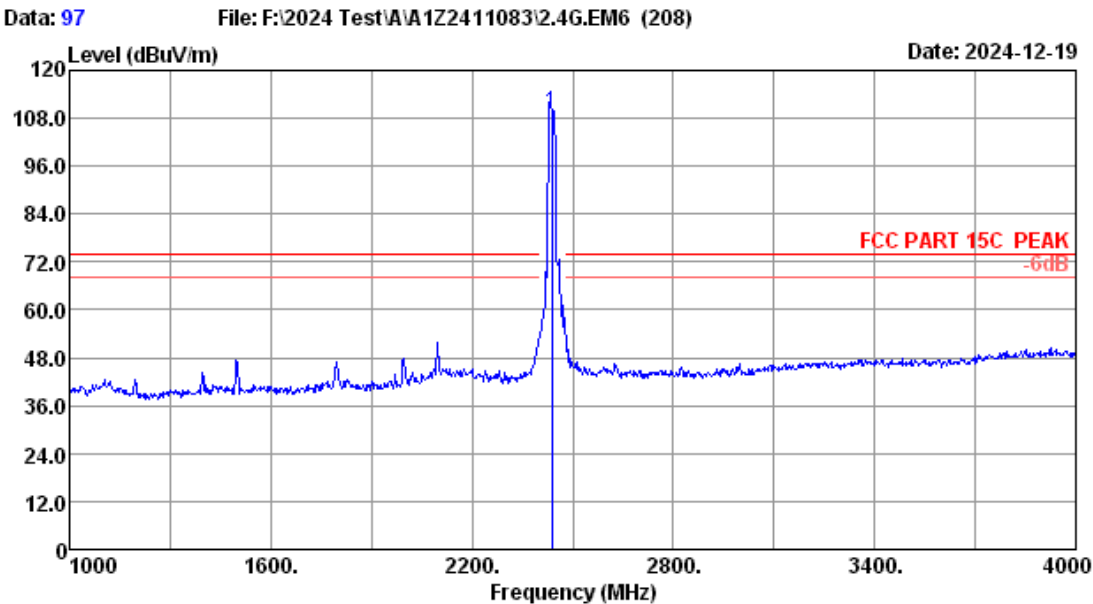


Site no. : 3m Chamber Data no. : 97
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax 2437 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.70	5.25	108.20	31.68	109.47	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

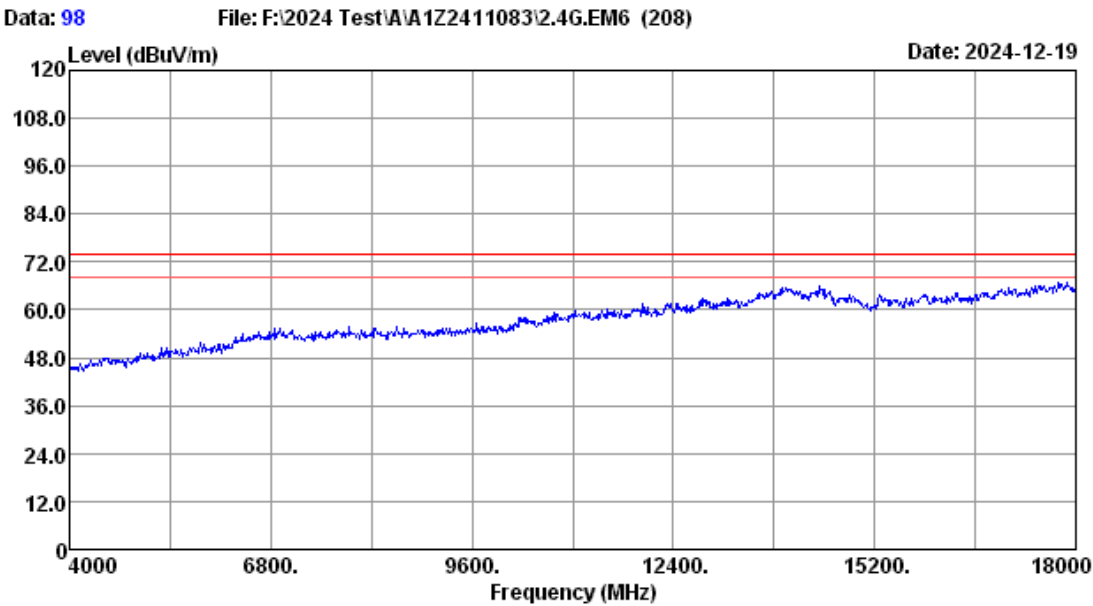


Site no.	: 3m Chamber	Data no.	: 98
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11ax 2437 TX mode MIMO		

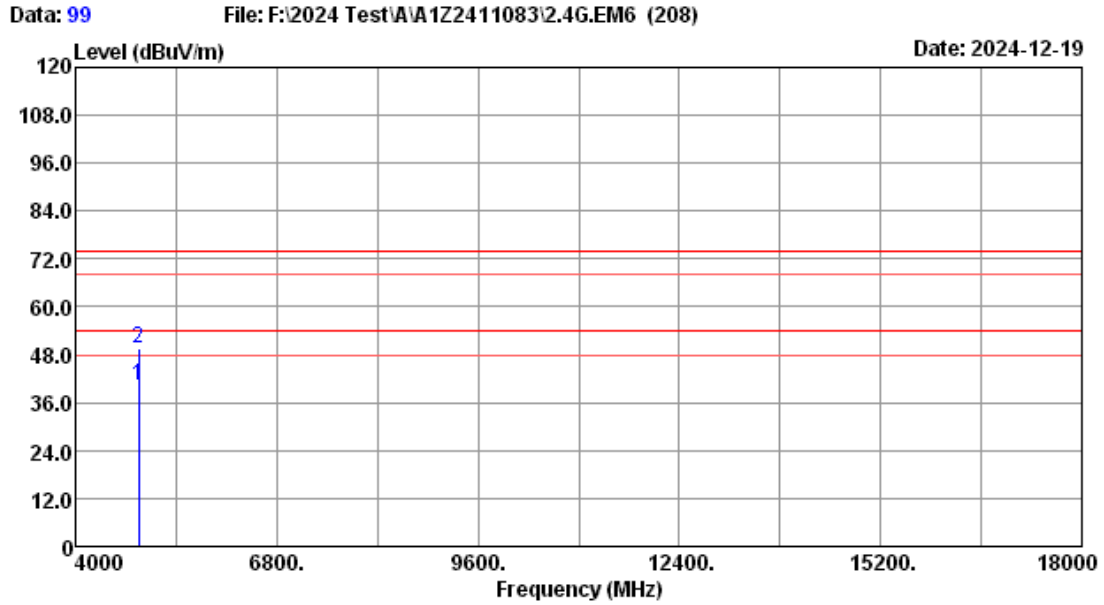

Site no. : 3m Chamber Data no. : 99
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax 2437 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.35	7.18	32.15	30.41	40.27	54.00	13.73	Average
2	4874.00	31.35	7.18	41.45	30.41	49.57	74.00	24.43	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

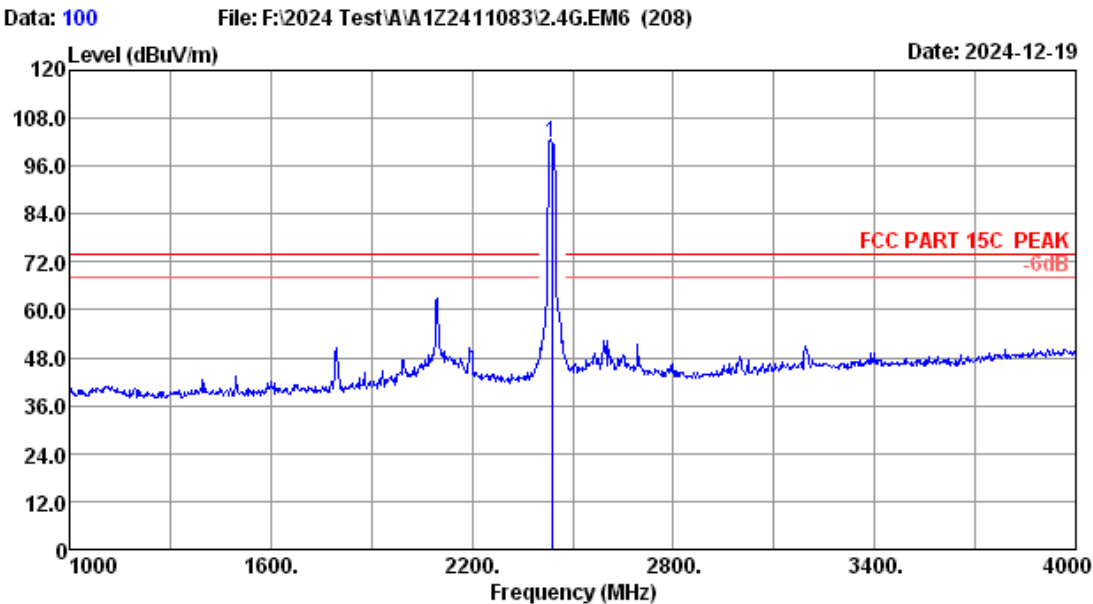


Site no. : 3m Chamber Data no. : 100
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax 2437 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2437.00	27.70	5.25	100.54	31.68	101.81	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

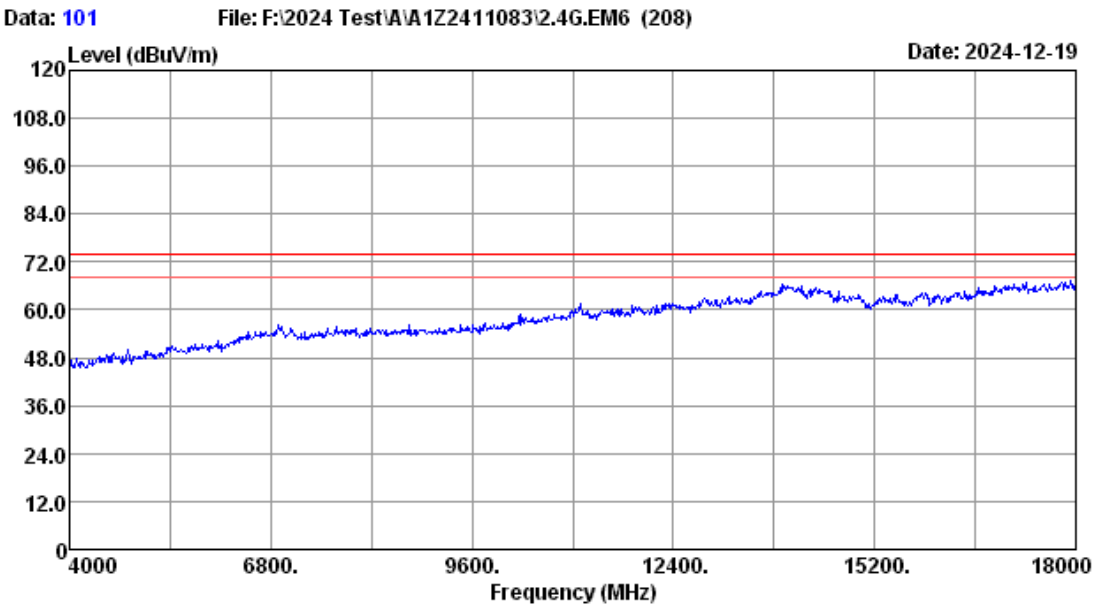


Site no.	: 3m Chamber	Data no.	: 101
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11ax 2437 TX mode MIMO		

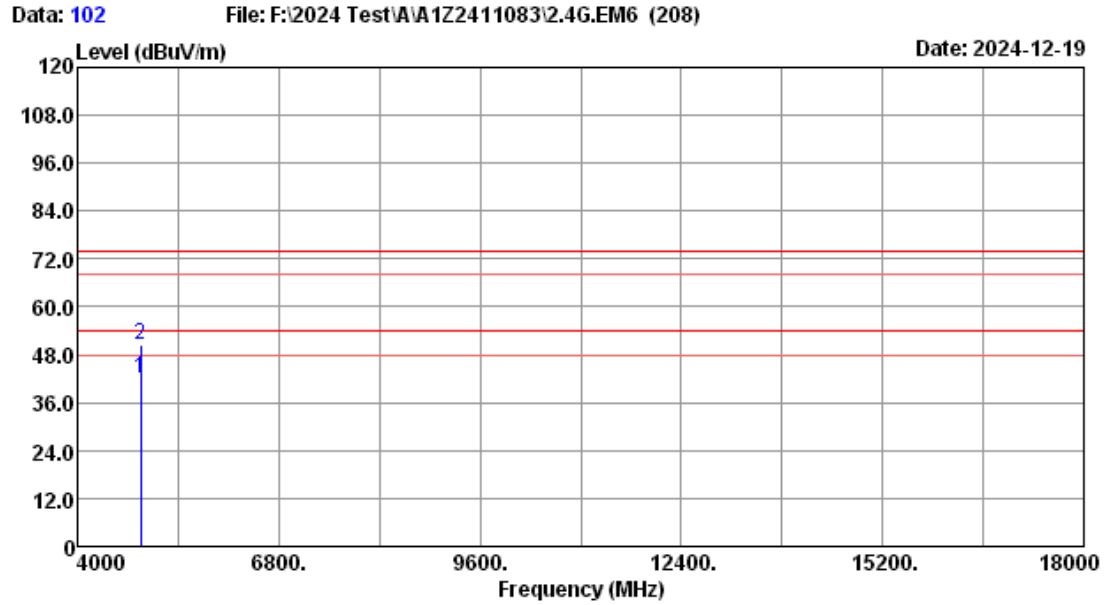

Site no. : 3m Chamber Data no. : 102
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax 2437 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.35	7.18	34.15	30.41	42.27	54.00	11.73	Average
2	4874.00	31.35	7.18	42.36	30.41	50.48	74.00	23.52	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

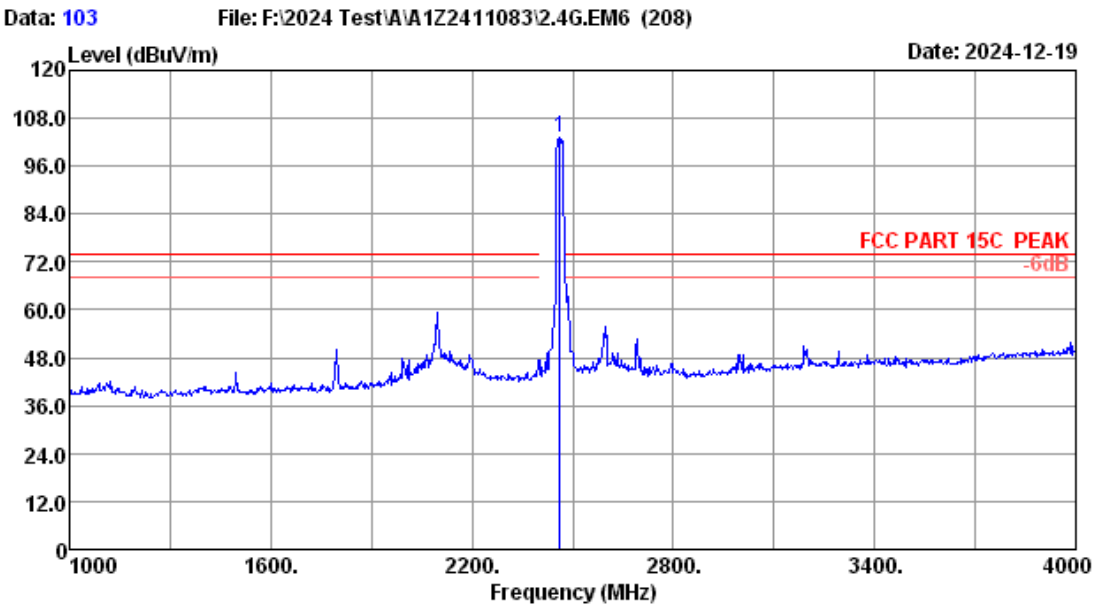


Site no. : 3m Chamber Data no. : 103
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax 2462 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.75	5.29	101.58	31.67	102.95	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

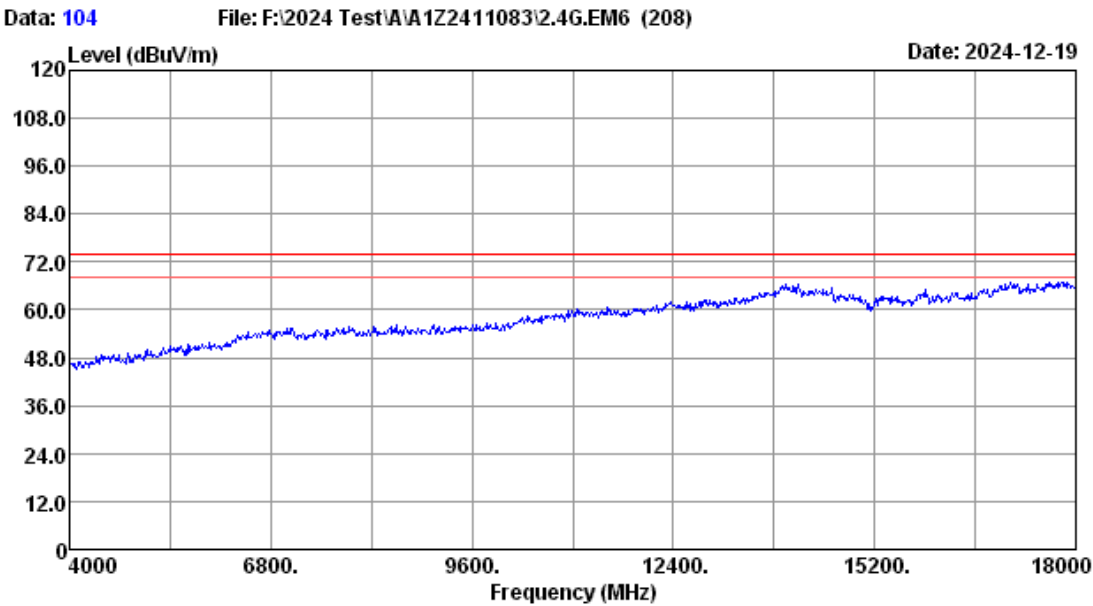


Site no.	: 3m Chamber	Data no.	: 104
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11ax 2462 TX mode MIMO		

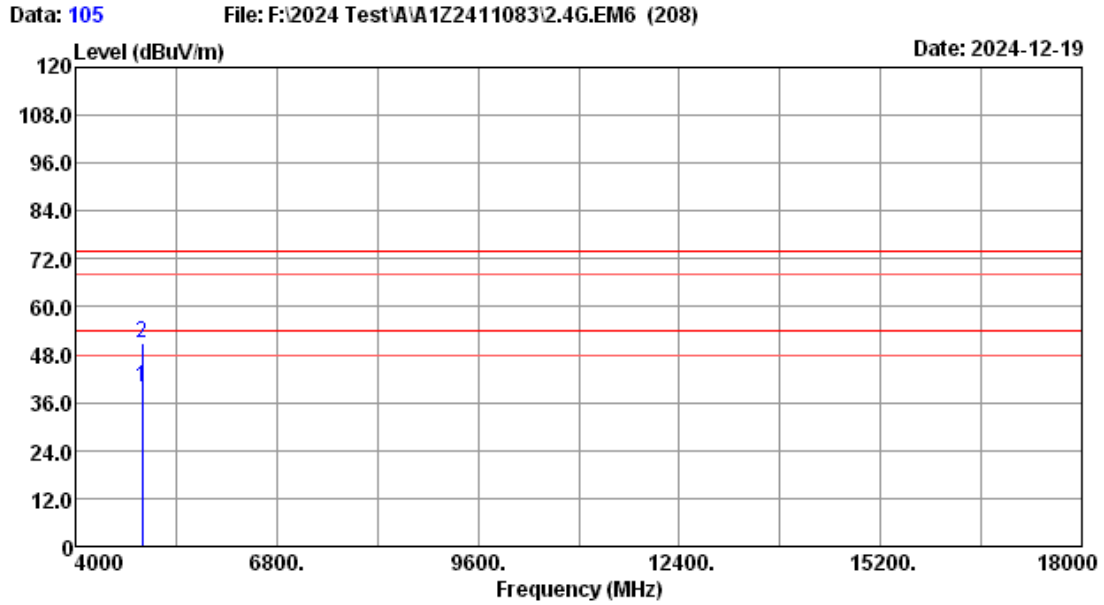

Site no. : 3m Chamber Data no. : 105
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax 2462 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.59	7.21	31.26	30.41	39.65	54.00	14.35	Average
2	4924.00	31.59	7.21	42.68	30.41	51.07	74.00	22.93	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

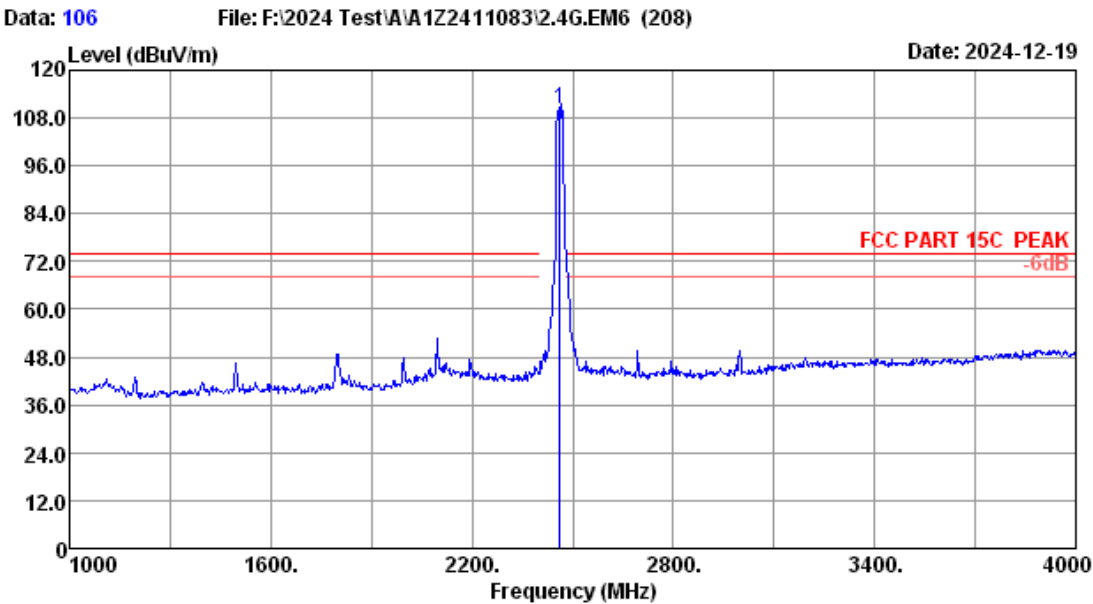


Site no. : 3m Chamber Data no. : 106
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.2°C/52.5% Engineer : Evan
Power rating :
Test Mode : 2.4G 11ax 2462 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.75	5.29	108.70	31.67	110.07	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

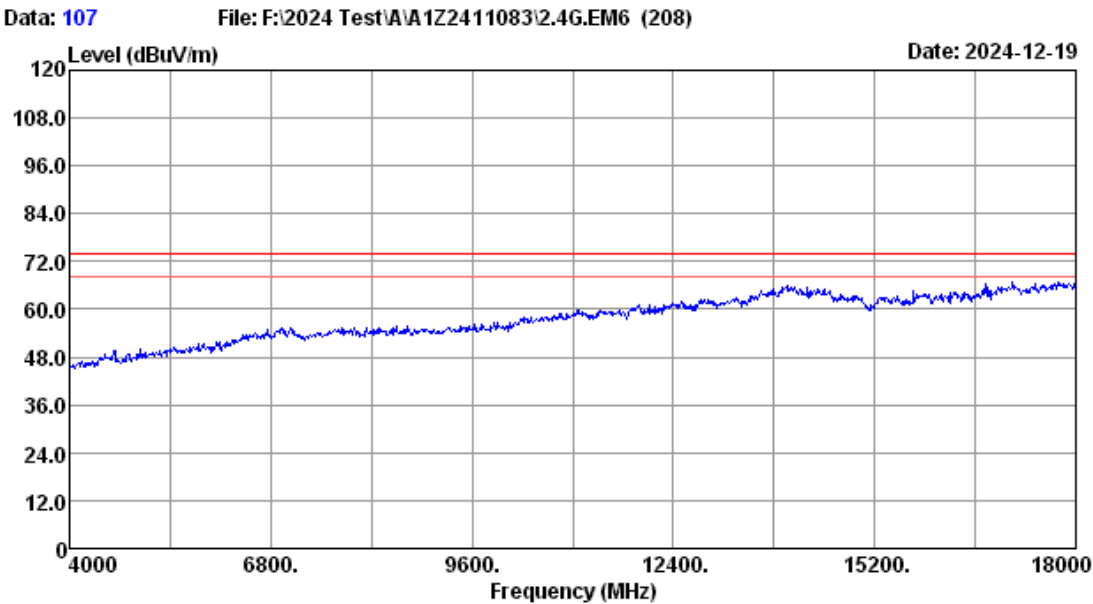

Site no.	: 3m Chamber	Data no.	: 107
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11ax 2462 TX mode MIMO		

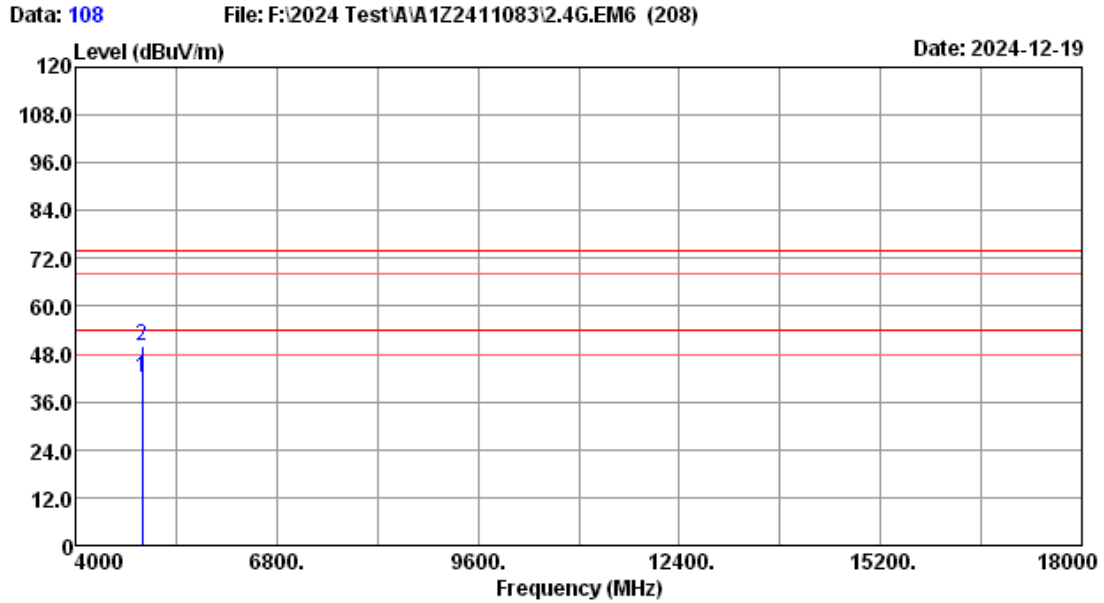


Site no. : 3m Chamber Data no. : 108
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax 2462 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.59	7.21	33.56	30.41	41.95	54.00	12.05	Average
2	4924.00	31.59	7.21	41.75	30.41	50.14	74.00	23.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.


MIMO Mode 11n40

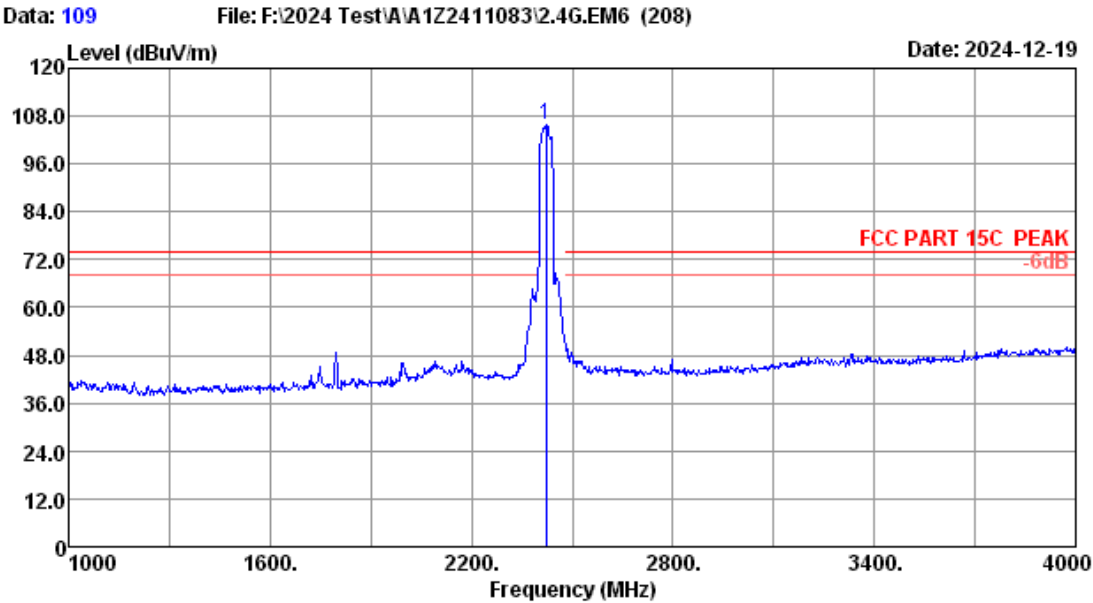


Site no. : 3m Chamber Data no. : 109
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n40 2422 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2422.00	27.70	5.25	104.75	31.69	106.01	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

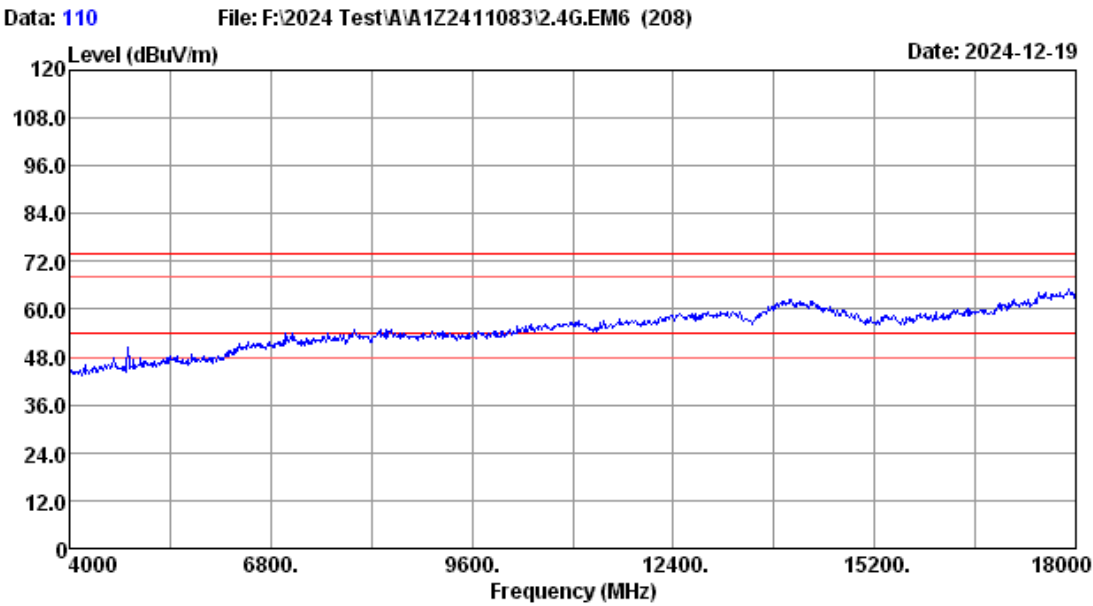


Site no.	: 3m Chamber	Data no.	: 110
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11n40 2422 TX mode MIMO		

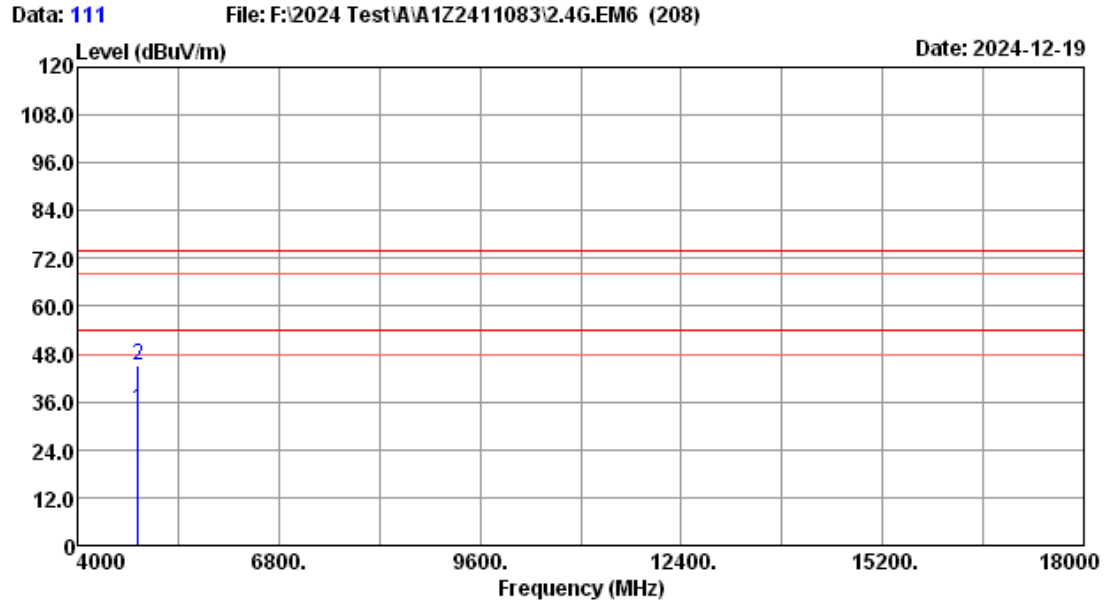

Site no. : 3m Chamber Data no. : 111
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n40 2422 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.00	31.30	7.16	26.00	30.42	34.04	54.00	19.96	Average
2	4844.00	31.30	7.16	37.28	30.42	45.32	74.00	28.68	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

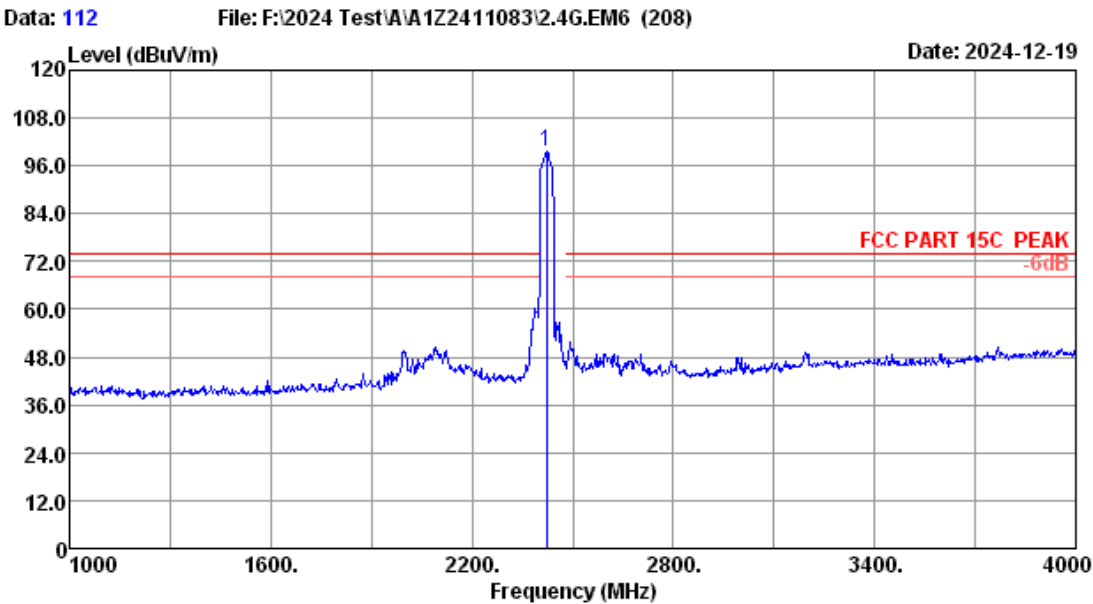


Site no. : 3m Chamber Data no. : 112
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n40 2422 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2422.00	27.70	5.25	98.33	31.69	99.59	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

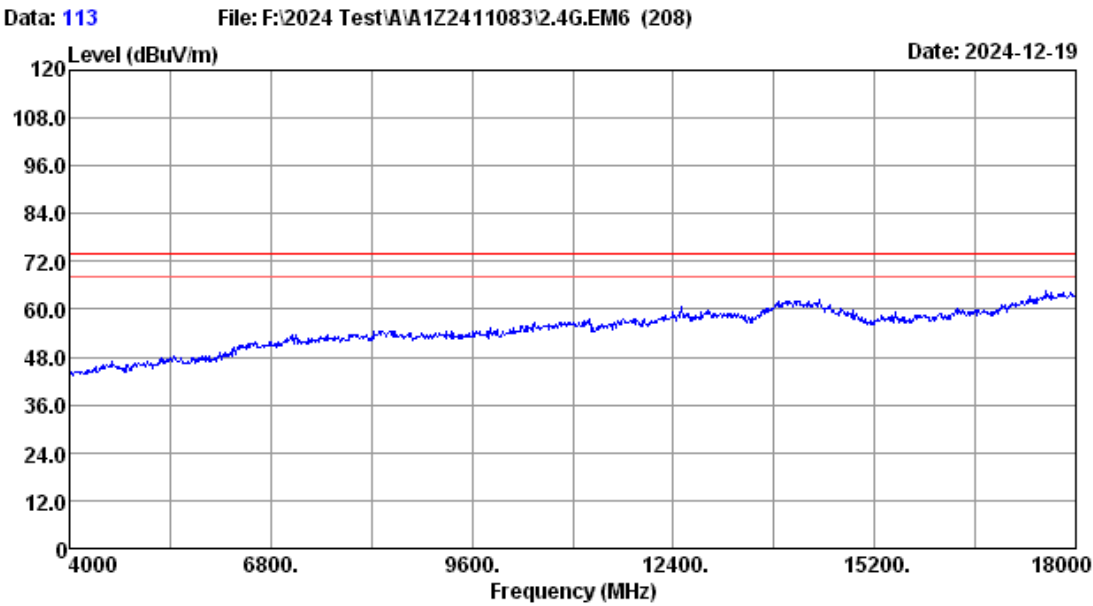


Site no.	: 3m Chamber	Data no.	: 113
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11n40 2422 TX mode MIMO		

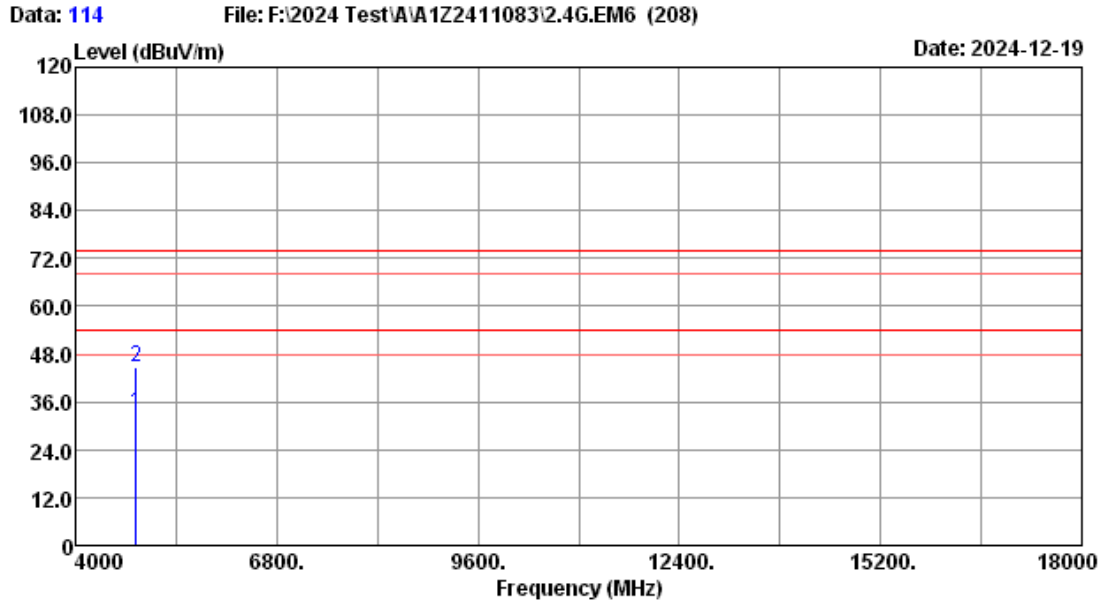

Site no. : 3m Chamber Data no. : 114
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n40 2422 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.00	31.30	7.16	25.00	30.42	33.04	54.00	20.96	Average
2	4844.00	31.30	7.16	36.84	30.42	44.88	74.00	29.12	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

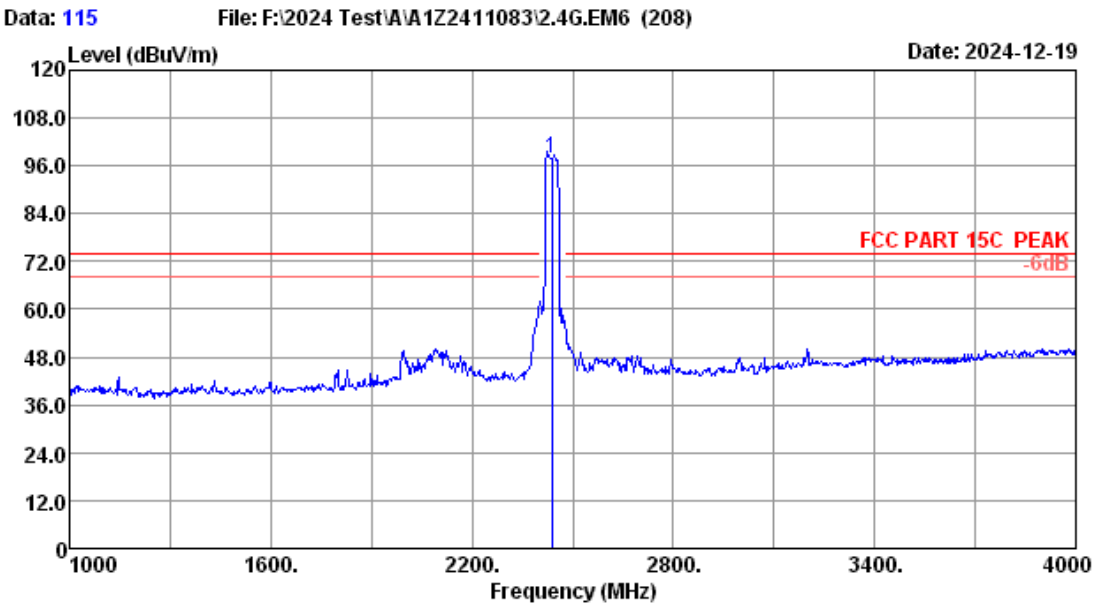


Site no. : 3m Chamber Data no. : 115
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n40 2437 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.70	5.25	96.44	31.68	97.71	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

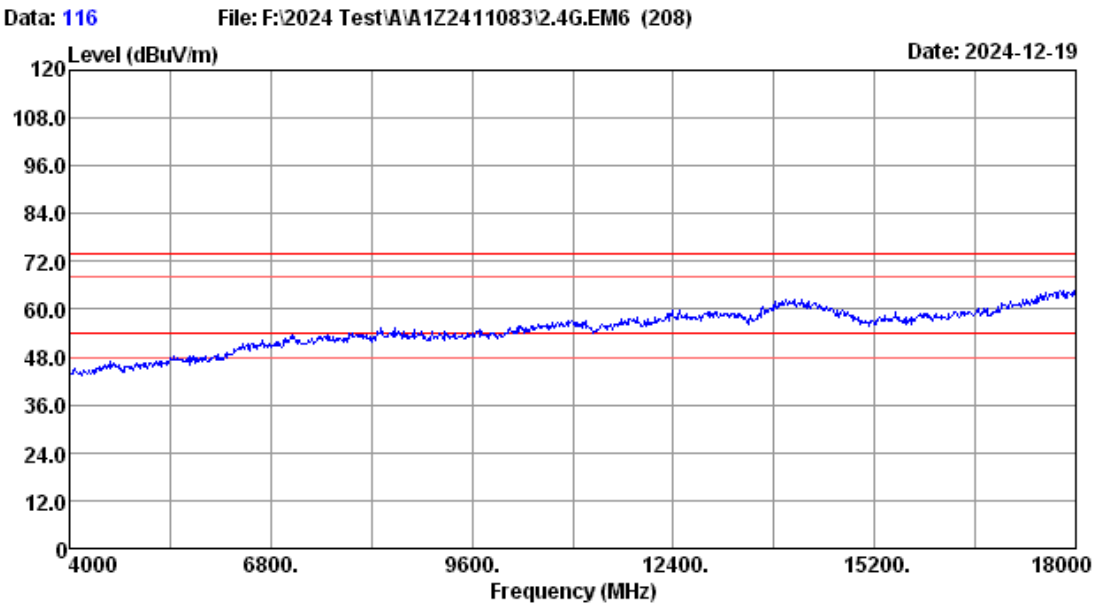

Site no.	: 3m Chamber	Data no.	: 116
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11n40 2437 TX mode MIMO		

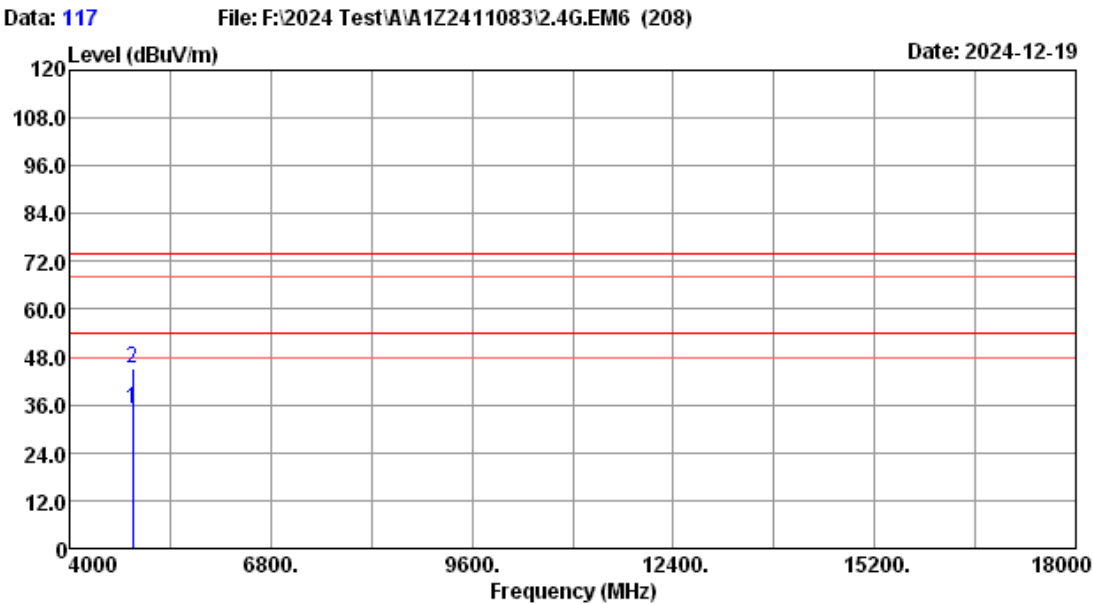


Site no. : 3m Chamber Data no. : 117
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n40 2437 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.35	7.18	26.99	30.41	35.11	54.00	18.89	Average
2	4874.00	31.35	7.18	37.06	30.41	45.18	74.00	28.82	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.


FCC ID: HLZGW1541P

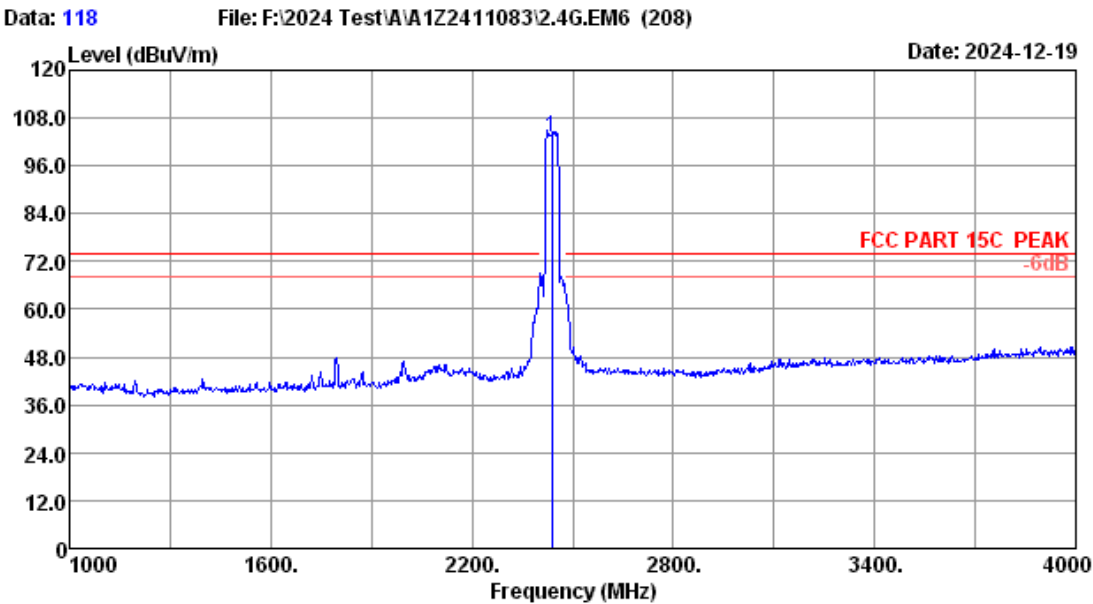


Site no.	: 3m Chamber	Data no.	: 118
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11n40 2437 TX mode MIMO		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.70	5.25	101.70	31.68	102.97	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

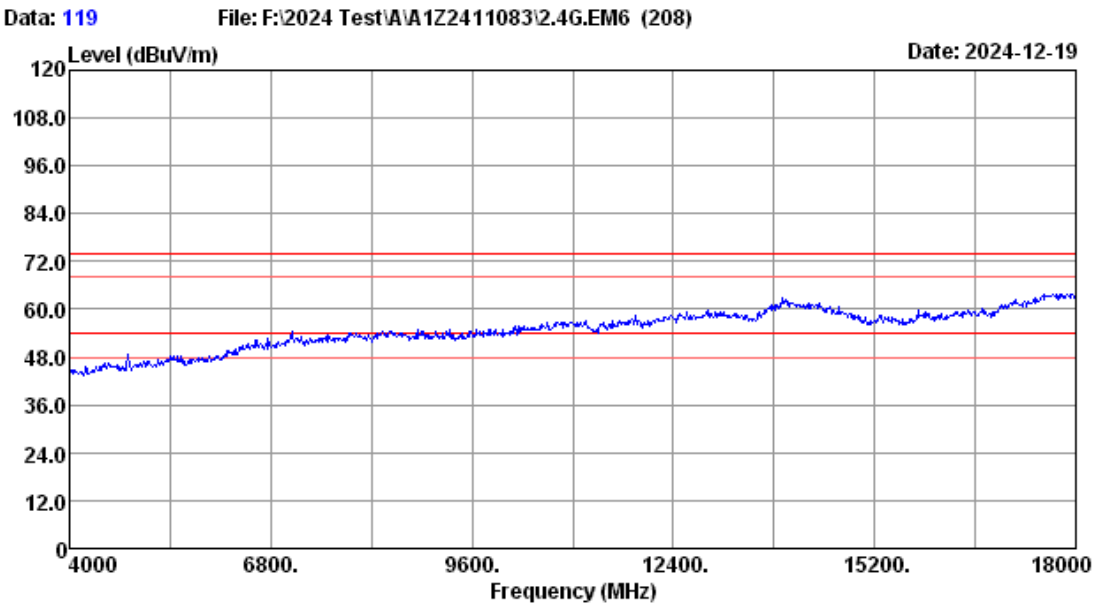


Site no.	: 3m Chamber	Data no.	: 119
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11n40 2437 TX mode MIMO		

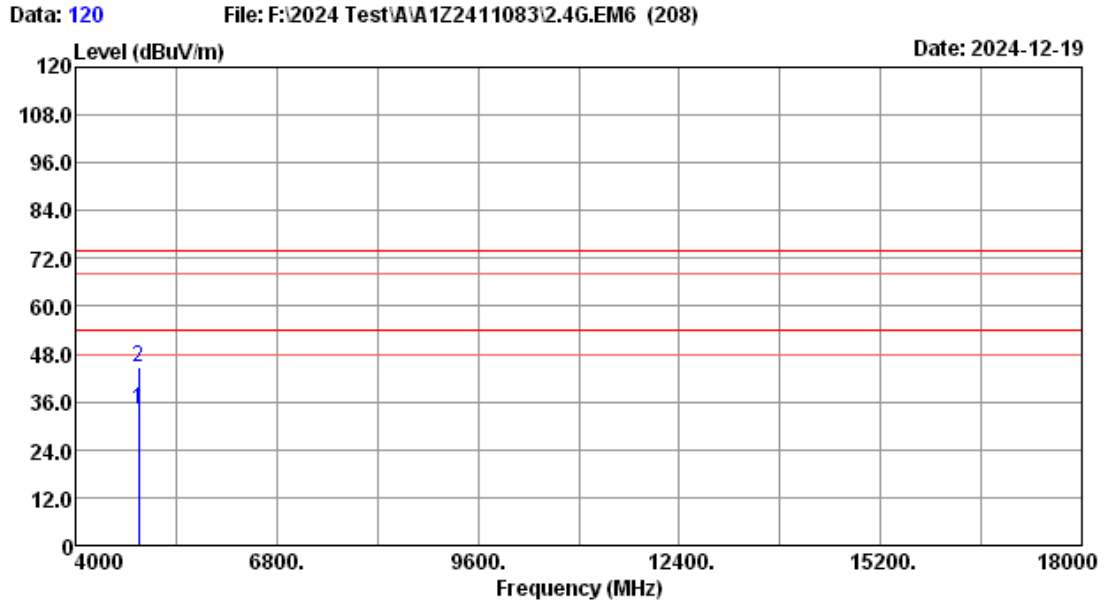

Site no. : 3m Chamber Data no. : 120
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n40 2437 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.35	7.18	25.99	30.41	34.11	54.00	19.89	Average
2	4874.00	31.35	7.18	36.77	30.41	44.89	74.00	29.11	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

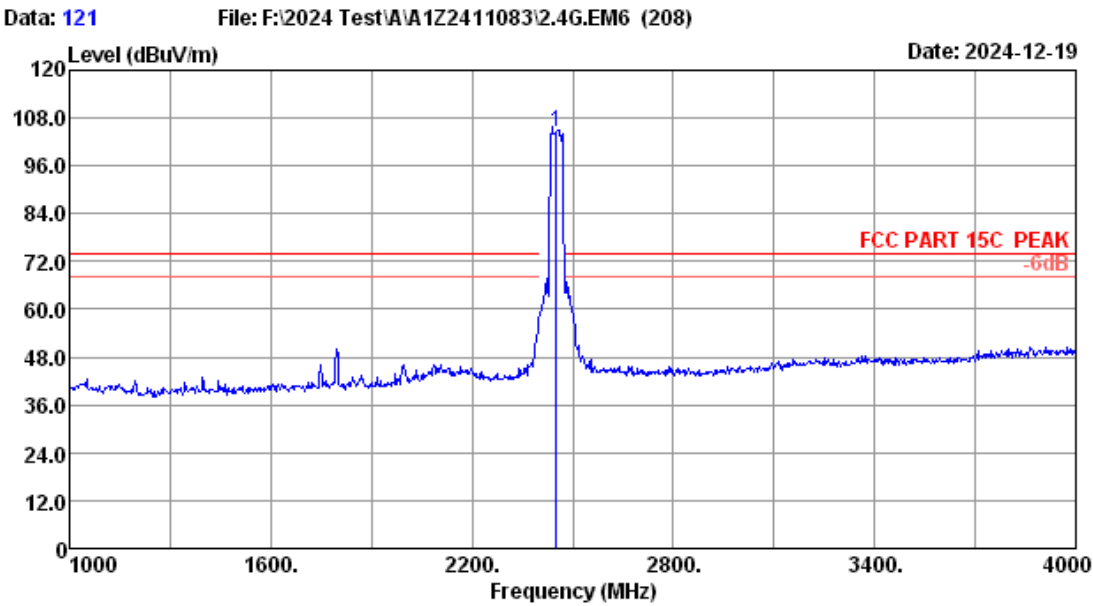


Site no. : 3m Chamber Data no. : 121
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n40 2452 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2452.00	27.71	5.27	103.27	31.67	104.58	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

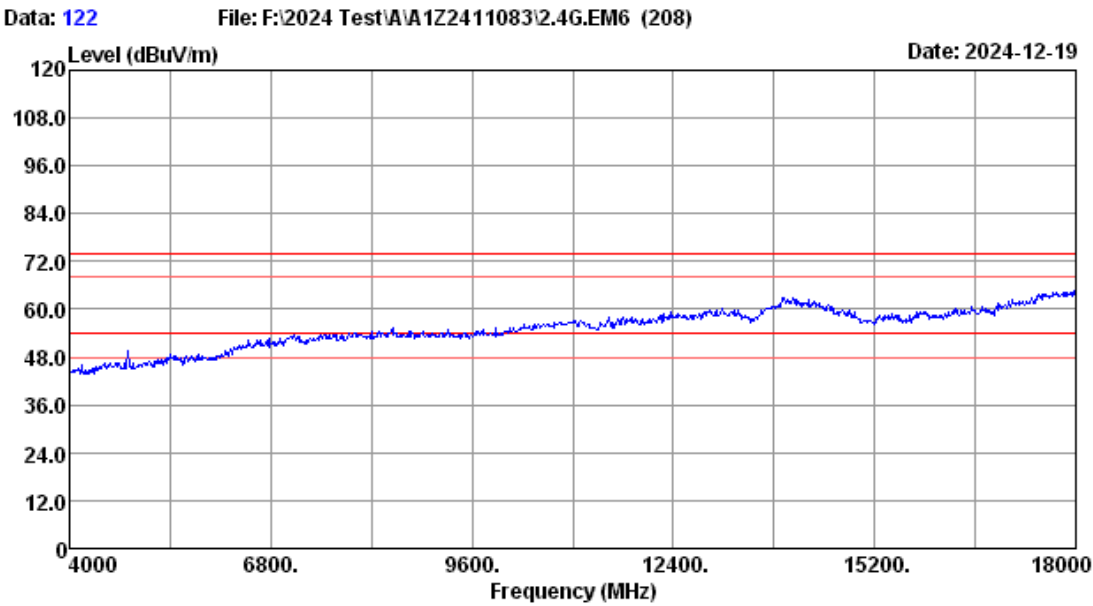


Site no.	: 3m Chamber	Data no.	: 122
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11n40 2452 TX mode MIMO		

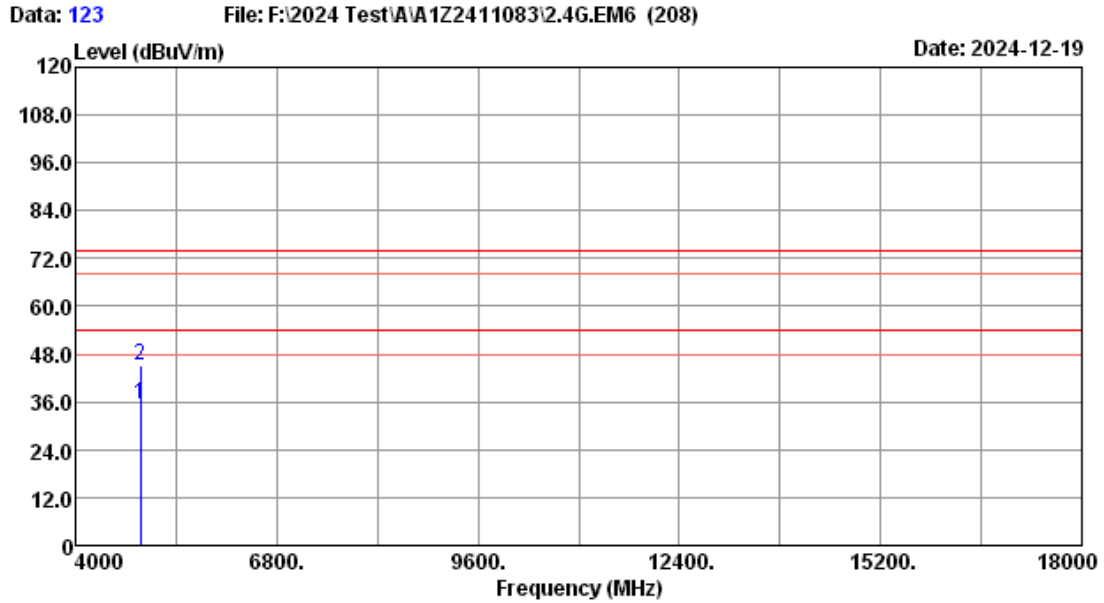

Site no. : 3m Chamber Data no. : 123
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n40 2452 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4904.00	31.43	7.19	27.00	30.41	35.21	54.00	18.79	Average
2	4904.00	31.43	7.19	37.15	30.41	45.36	74.00	28.64	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

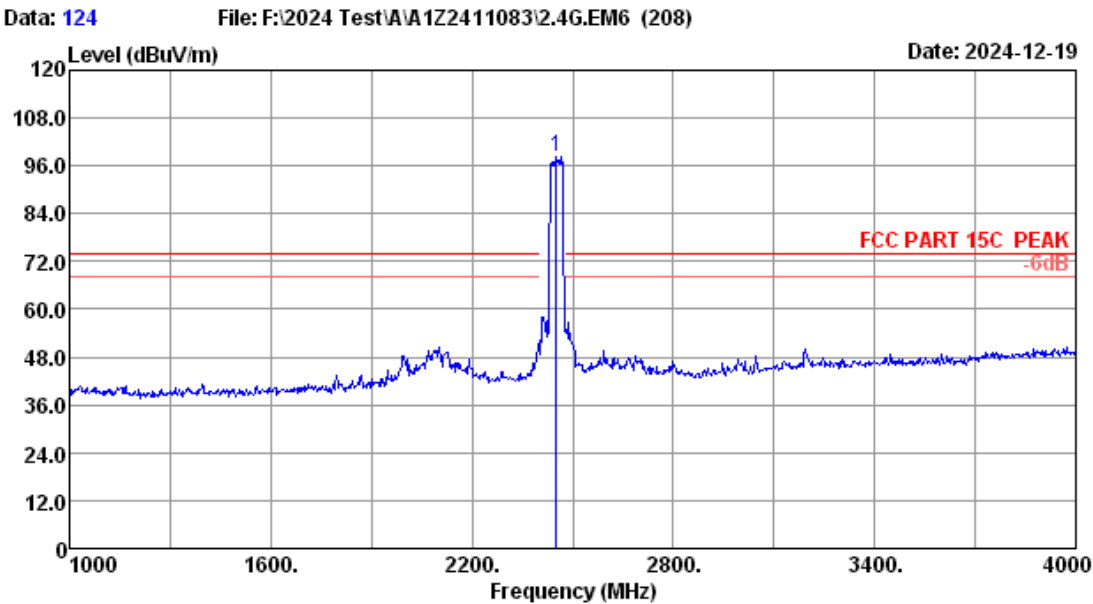


Site no. : 3m Chamber Data no. : 124
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n40 2452 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2452.00	27.71	5.27	96.79	31.67	98.10	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

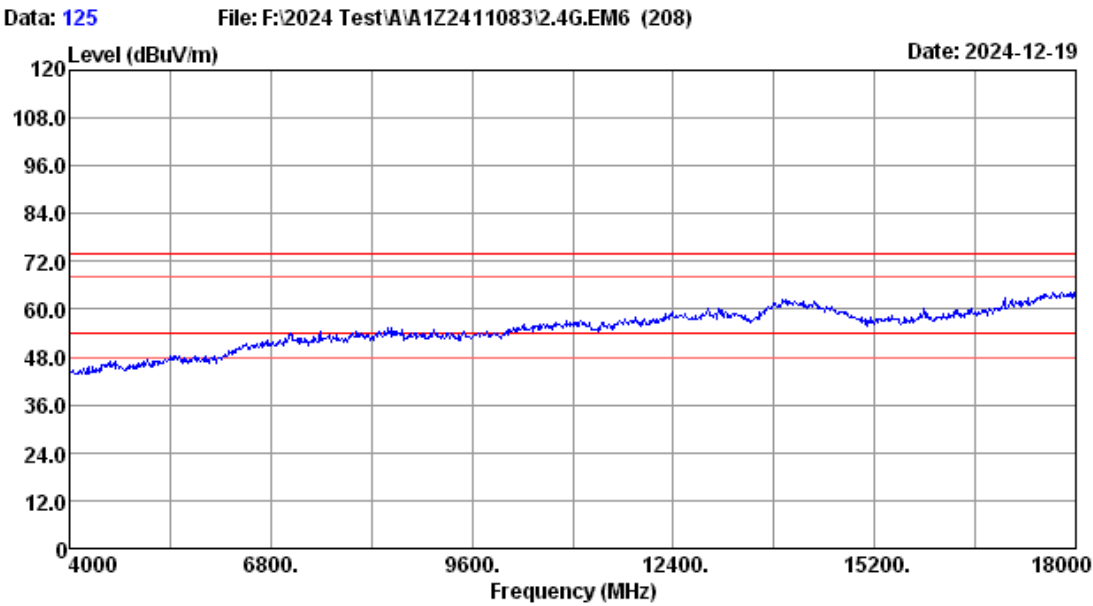

Site no.	: 3m Chamber	Data no.	: 125
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11n40 2452 TX mode MIMO		

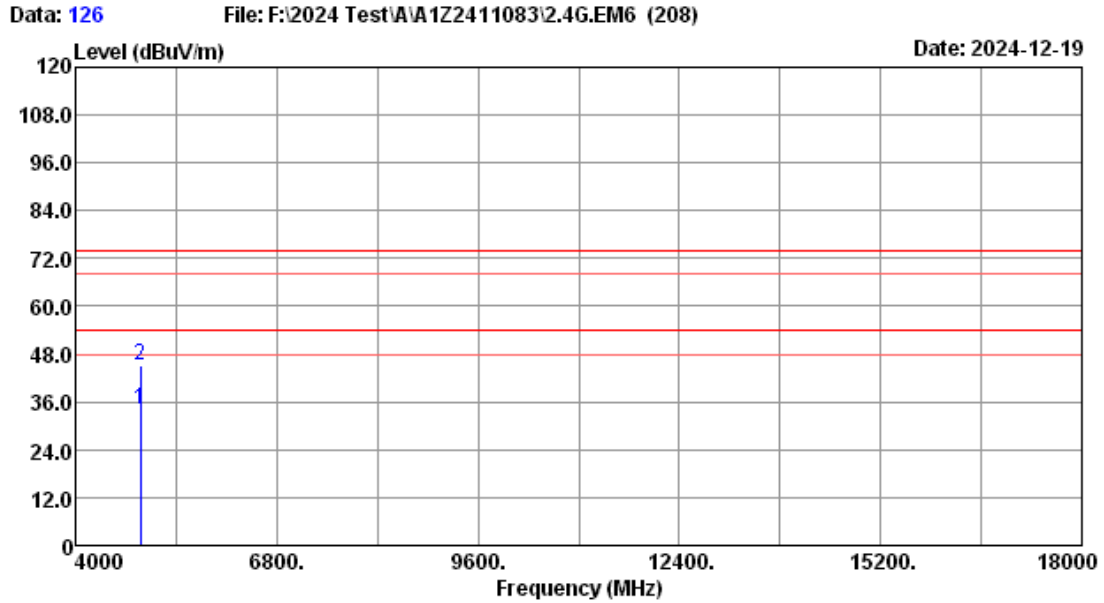


Site no. : 3m Chamber Data no. : 126
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n40 2452 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4904.00	31.43	7.19	26.00	30.41	34.21	54.00	19.79	Average
2	4904.00	31.43	7.19	36.90	30.41	45.11	74.00	28.89	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.


MIMO Mode 11ax 40

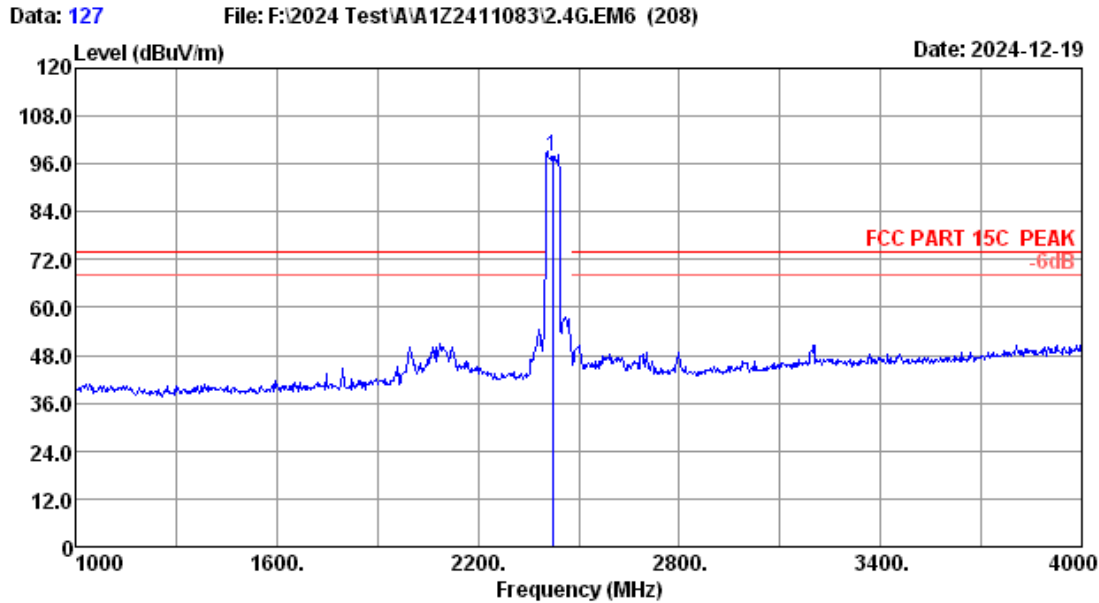


Site no. : 3m Chamber Data no. : 127
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax40 2422 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2422.00	27.70	5.25	96.72	31.69	97.98	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

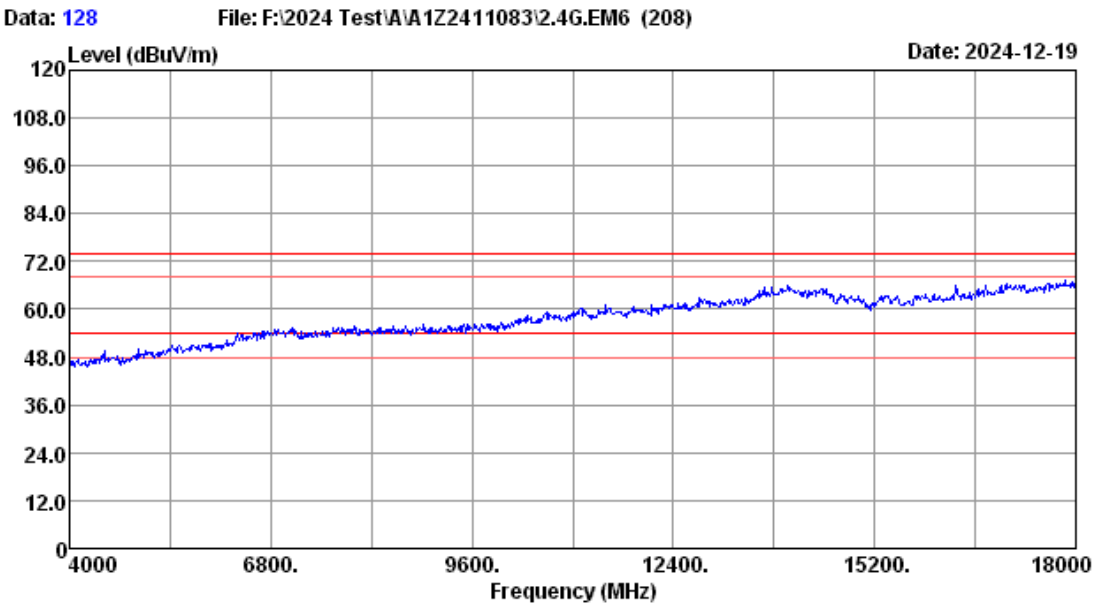


Site no.	: 3m Chamber	Data no.	: 128
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11ax40 2422 TX mode MIMO		

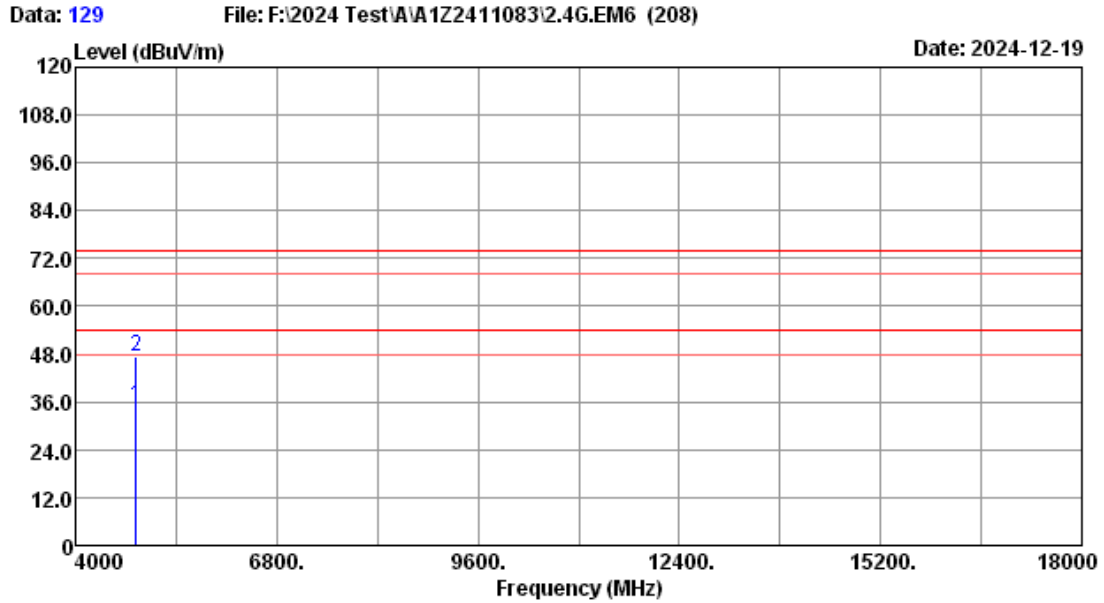

Site no. : 3m Chamber Data no. : 129
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax40 2422 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.00	31.30	7.16	27.00	30.42	35.04	54.00	18.96	Average
2	4844.00	31.30	7.16	39.44	30.42	47.48	74.00	26.52	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

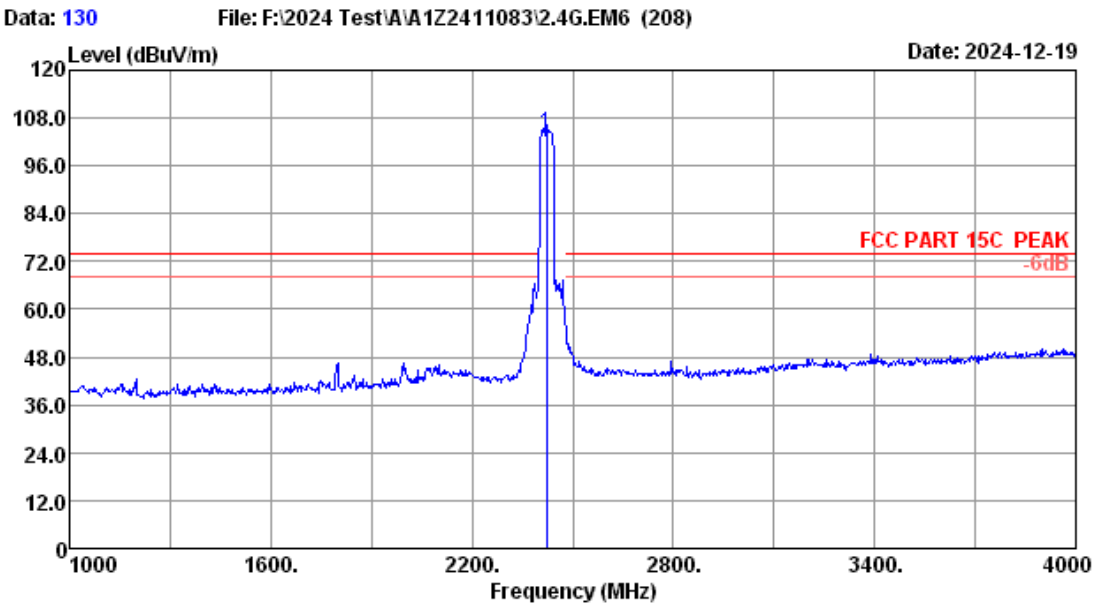


Site no. : 3m Chamber Data no. : 130
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.2°C/52.5% Engineer : Evan
Power rating :
Test Mode : 2.4G 11ax40 2422 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2422.00	27.70	5.25	102.71	31.69	103.97	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

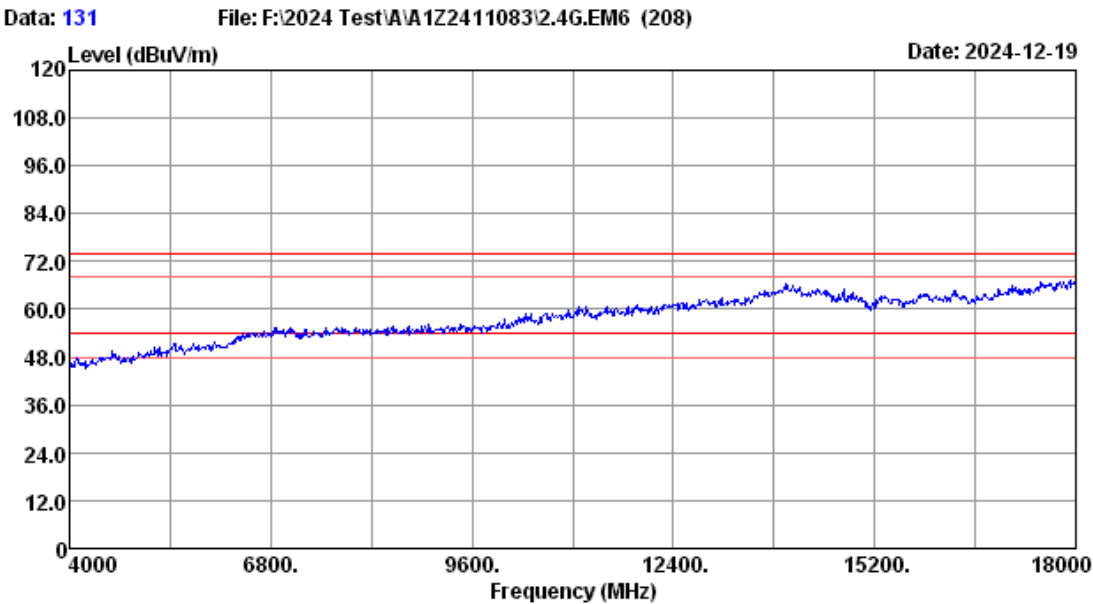


Site no.	: 3m Chamber	Data no.	: 131
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11ax40 2422 TX mode MIMO		

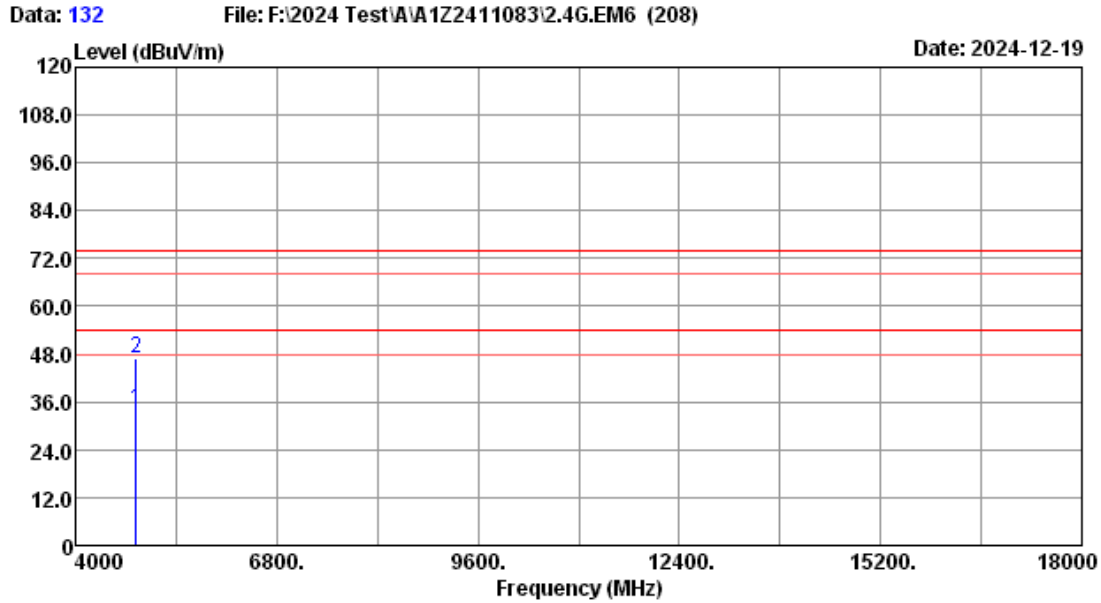

Site no. : 3m Chamber Data no. : 132
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax40 2422 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.00	31.30	7.16	26.00	30.42	34.04	54.00	19.96	Average
2	4844.00	31.30	7.16	38.83	30.42	46.87	74.00	27.13	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

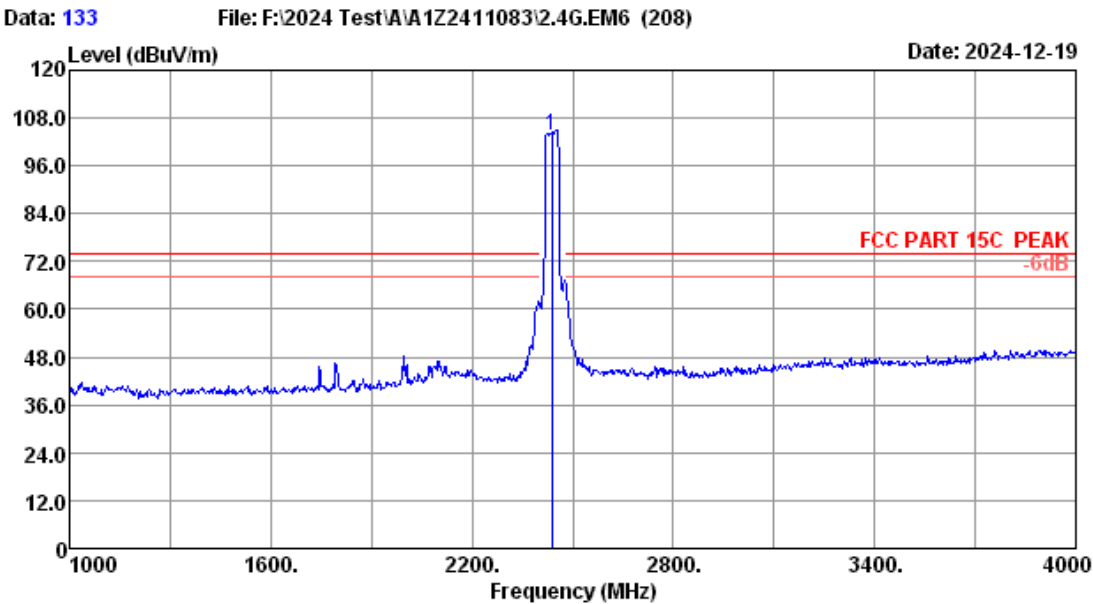


Site no. : 3m Chamber Data no. : 133
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.2°C/52.5% Engineer : Evan
Power rating :
Test Mode : 2.4G 11ax40 2437 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.70	5.25	102.48	31.68	103.75	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

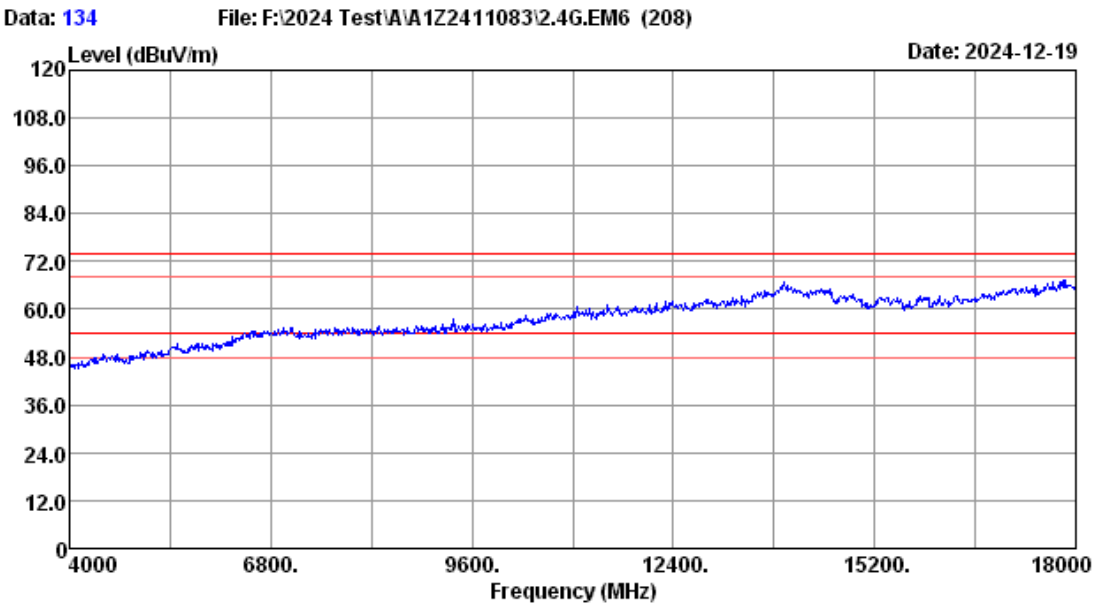


Site no.	: 3m Chamber	Data no.	: 134
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11ax40 2437 TX mode MIMO		

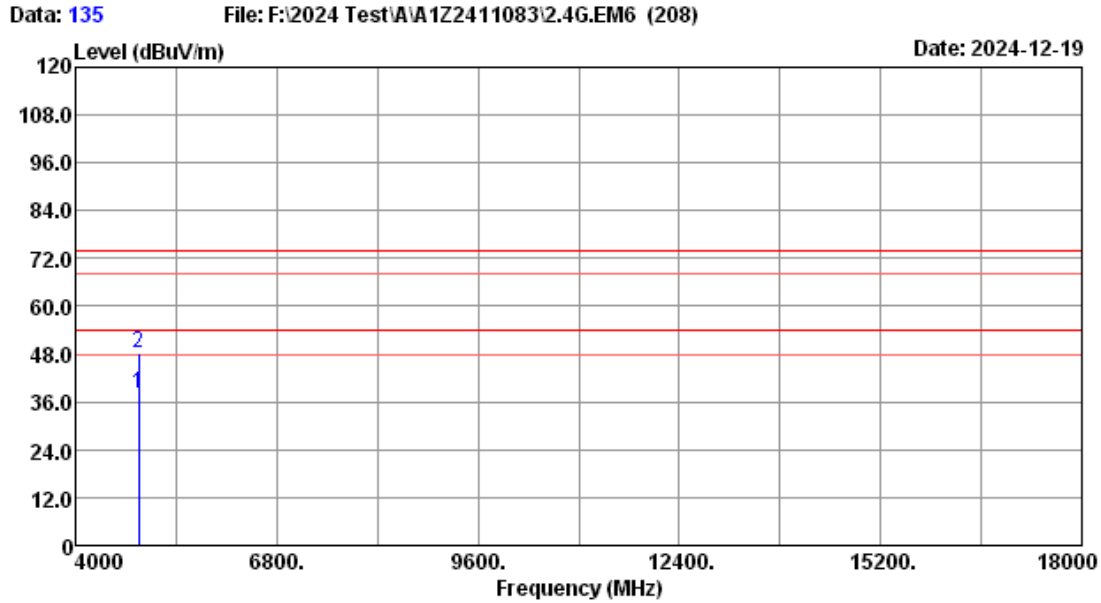

Site no. : 3m Chamber Data no. : 135
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax40 2437 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.35	7.18	29.99	30.41	38.11	54.00	15.89	Average
2	4874.00	31.35	7.18	40.05	30.41	48.17	74.00	25.83	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

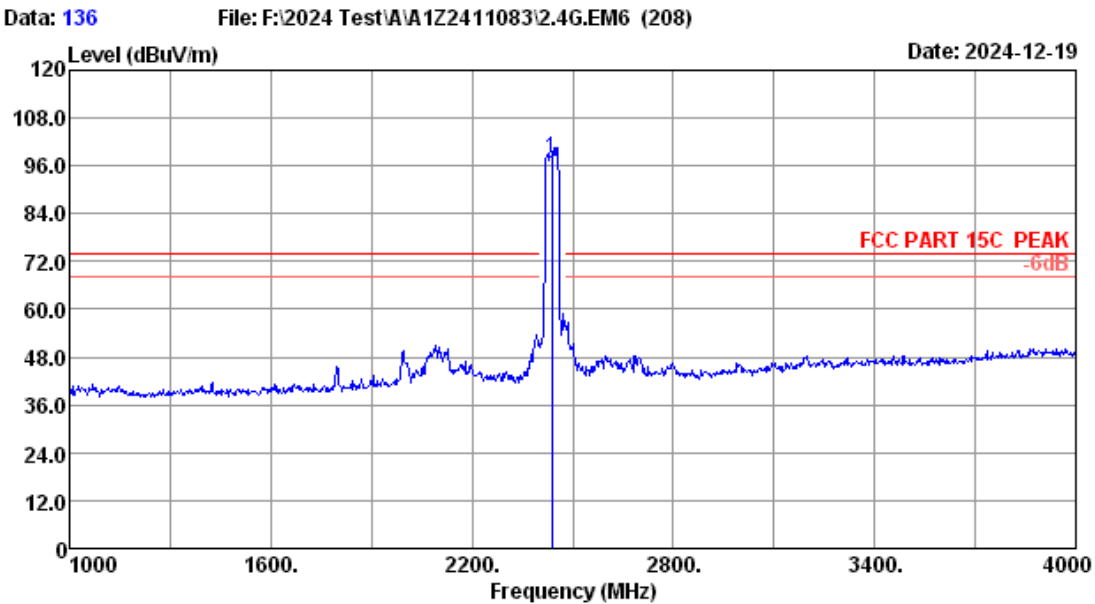


Site no. : 3m Chamber Data no. : 136
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax40 2437 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.70	5.25	96.67	31.68	97.94	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

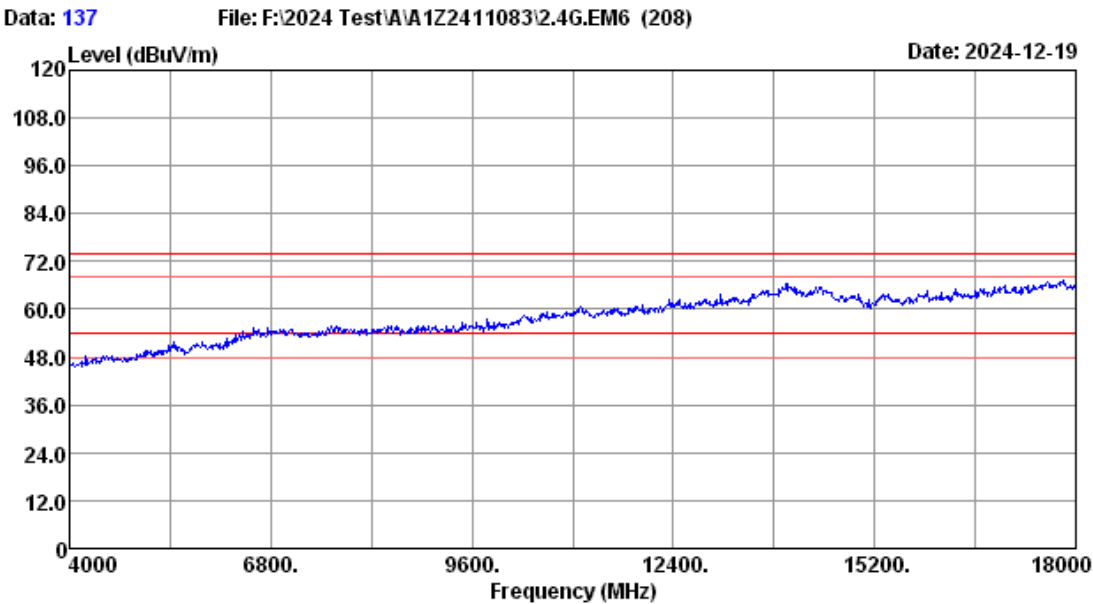


Site no.	: 3m Chamber	Data no.	: 137
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11ax40 2437 TX mode MIMO		

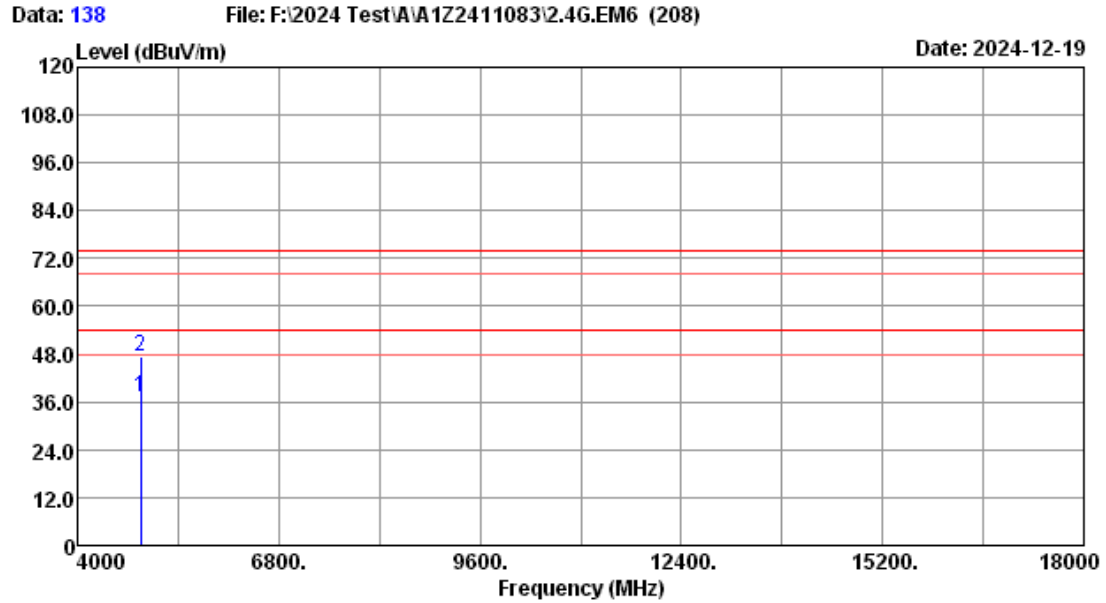

Site no. : 3m Chamber Data no. : 138
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax40 2437 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.35	7.18	28.99	30.41	37.11	54.00	16.89	Average
2	4874.00	31.35	7.18	39.42	30.41	47.54	74.00	26.46	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

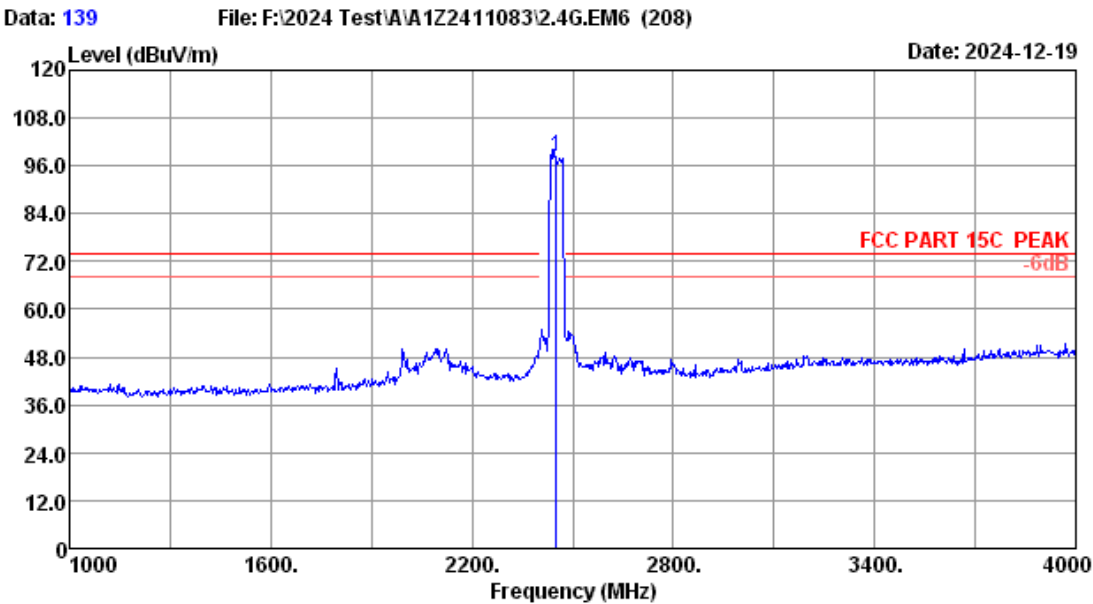


Site no. : 3m Chamber Data no. : 139
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax40 2452 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2452.00	27.71	5.27	96.94	31.67	98.25	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

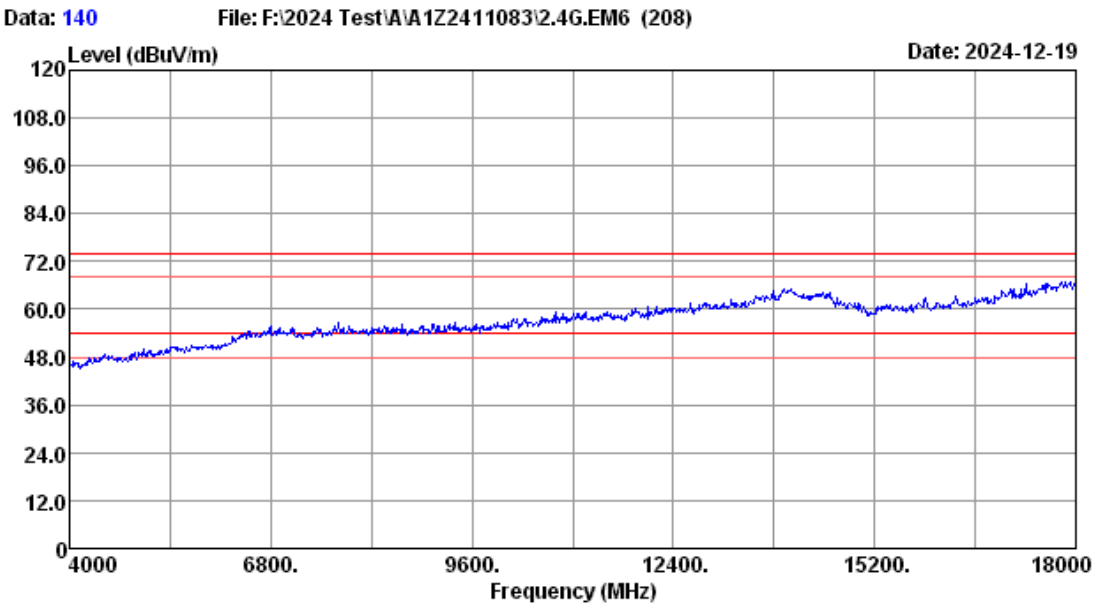


Site no.	: 3m Chamber	Data no.	: 140
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11ax40 2452 TX mode MIMO		

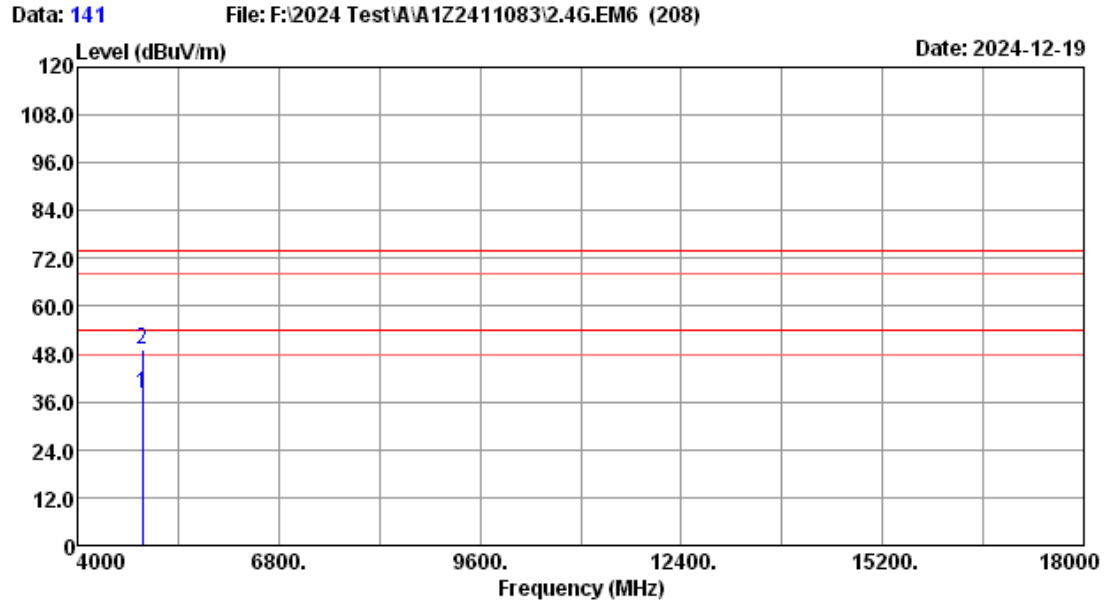

Site no. : 3m Chamber Data no. : 141
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax40 2452 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4904.00	31.43	7.19	30.00	30.41	38.21	54.00	15.79	Average
2	4904.00	31.43	7.19	40.85	30.41	49.06	74.00	24.94	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

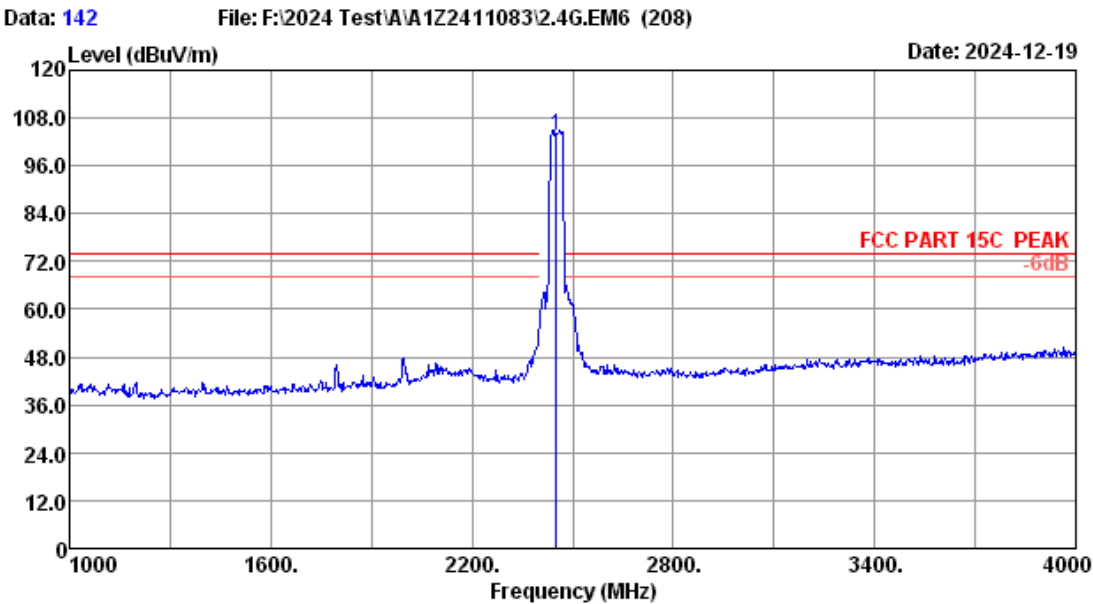


Site no.	: 3m Chamber	Data no.	: 142
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11ax40 2452 TX mode MIMO		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2452.00	27.71	5.27	102.40	31.67	103.71	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

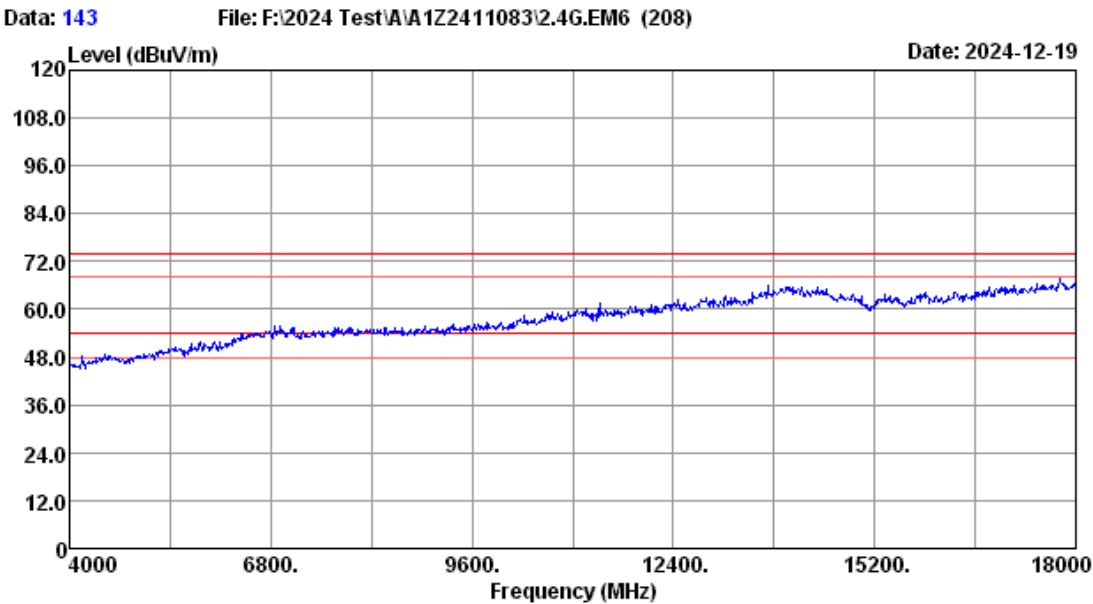

Site no.	: 3m Chamber	Data no.	: 143
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.5°C/53.1%	Engineer	: Evan
Power rating	:		
Test Mode	: 2.4G 11ax40 2452 TX mode MIMO		

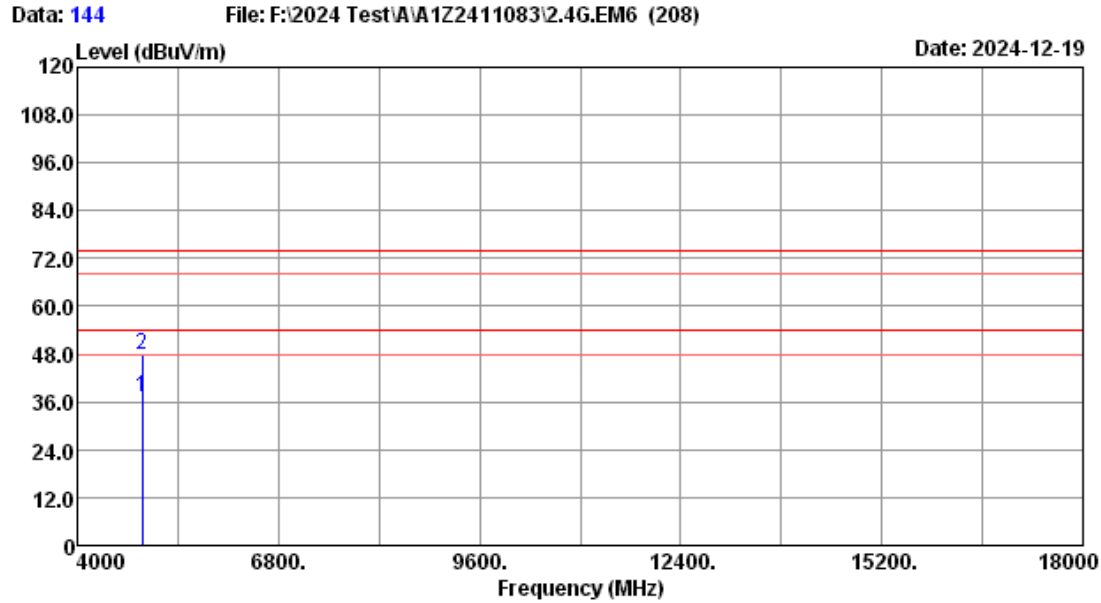

Site no. : 3m Chamber Data no. : 144
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 21.5°C/53.1% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax40 2452 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4904.00	31.43	7.19	29.00	30.41	37.21	54.00	16.79	Average
2	4904.00	31.43	7.19	39.56	30.41	47.77	74.00	26.23	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

5. CONDUCTED SPURIOUS EMISSIONS

5.1.Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30dB instead of 20dB.

5.2.Test Procedure

The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions with peak detector.

5.3.Test result






PASS (The testing data was attached in the next pages.)

EUT: Notebook Computer		
M/N: N24B4		
Test date: 2024-12-17~30	Pressure: 103.1±1.0 kpa	Humidity: 51.5±3.0%
Tested by: Evan	Test site: RF site	Temperature:22.5±0.1℃




ANT0:

Test Mode: IEEE 802.11b

Test CH1: 2412MHz

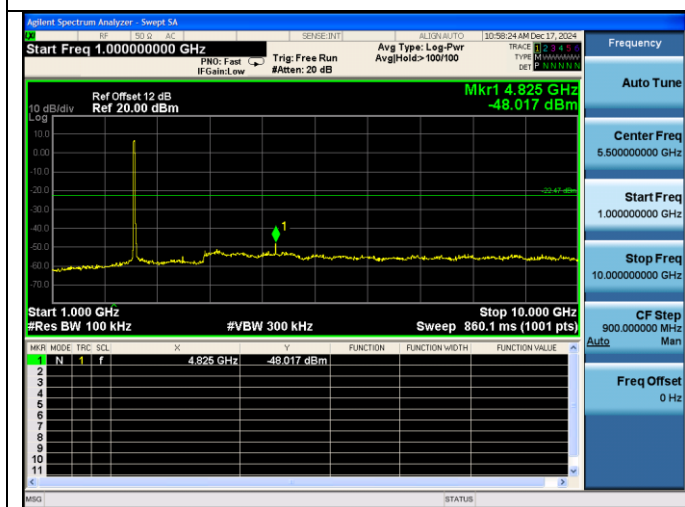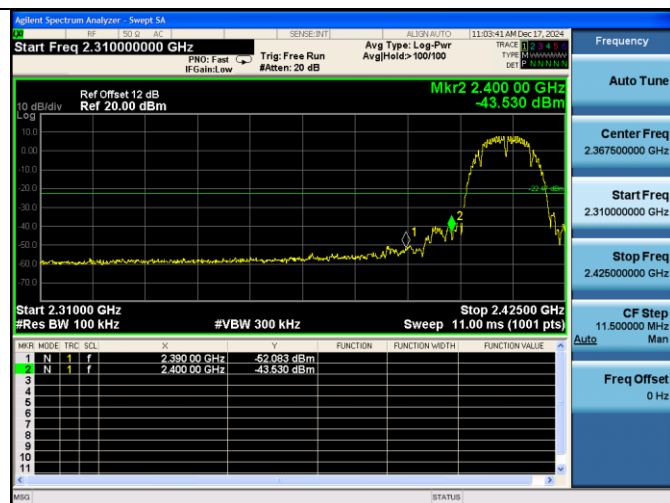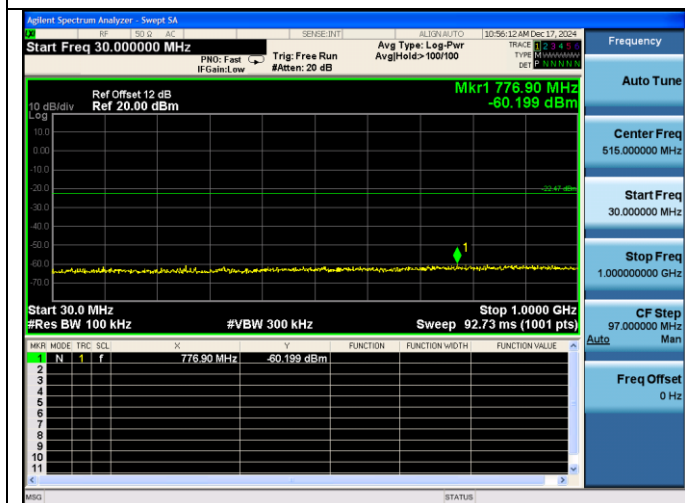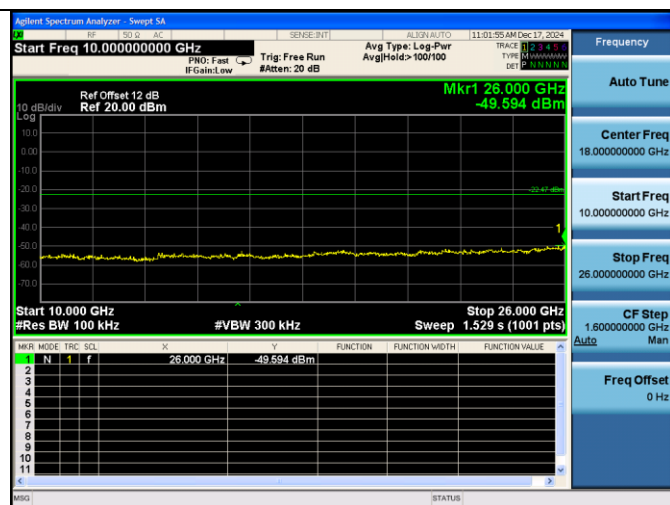

Test CH6: 2437MHz

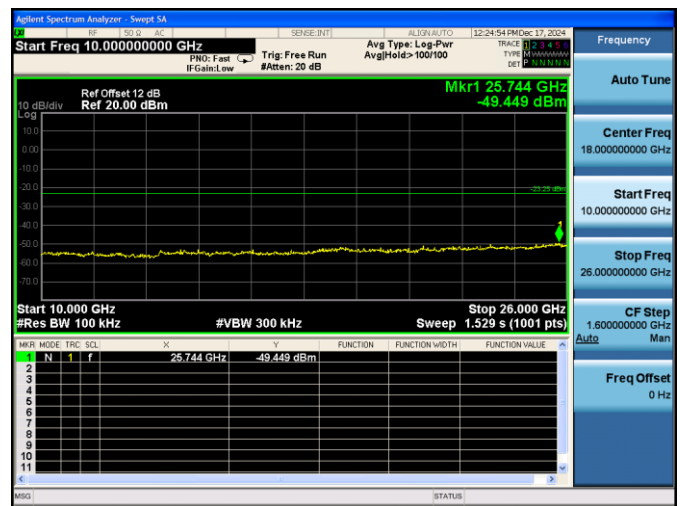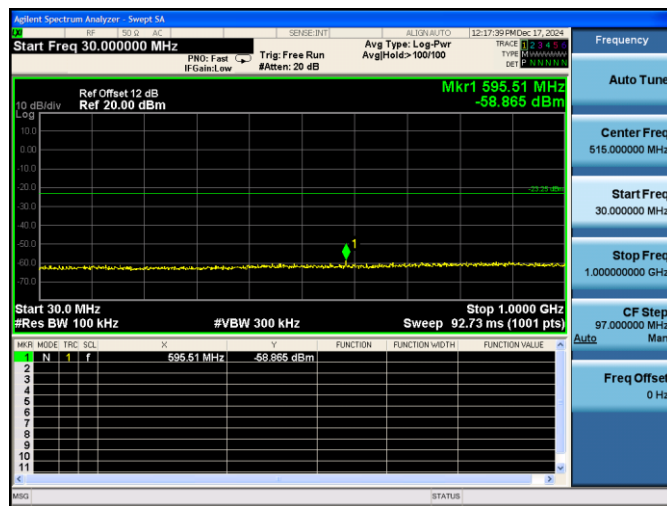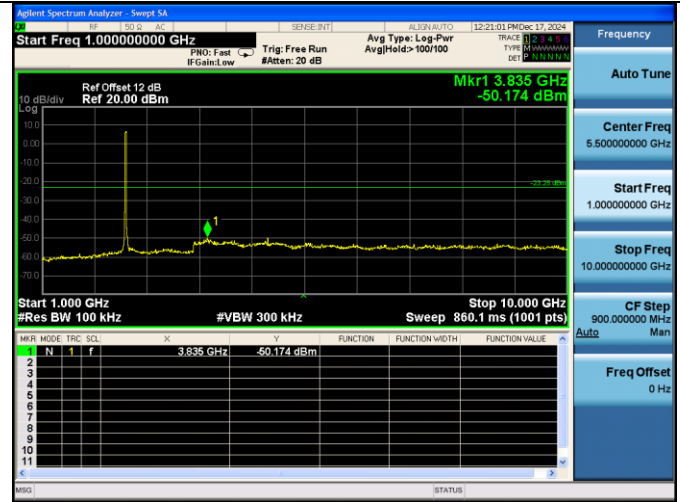

Test CH11: 2462MHz

