


SISO Mode ANT 0 11b

Data: 53

File: F:\2024 Test\A\A1Z2411083\2.4G.EM6 (116)


Date: 2024-12-17

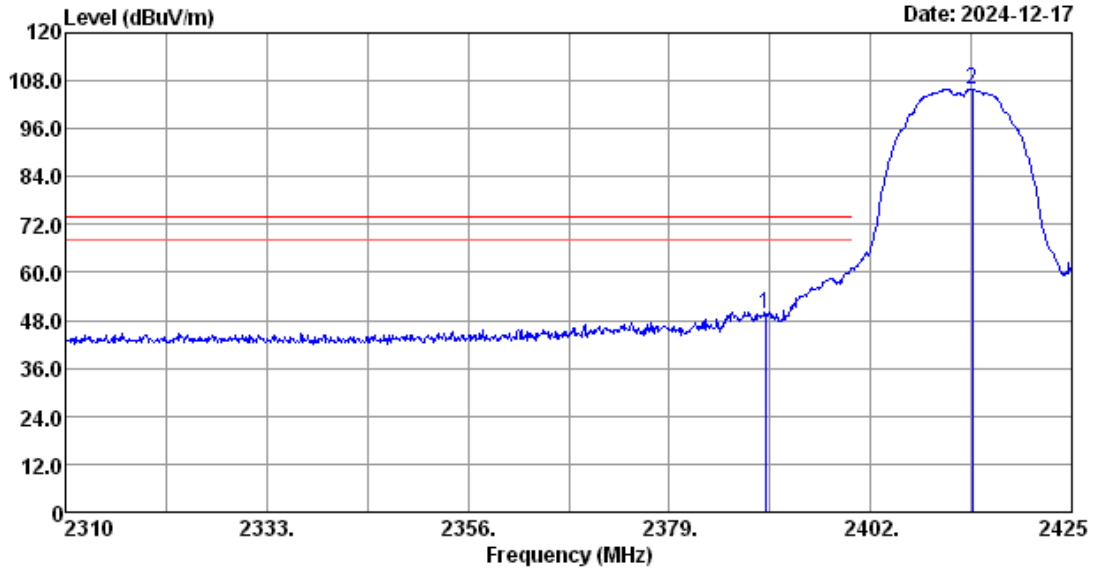

Site no. : 3m Chamber Data no. : 53
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2412 TX mode S0

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	48.42	31.70	49.57	74.00	24.43	Peak
2	2413.62	27.70	5.23	104.51	31.69	105.75	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

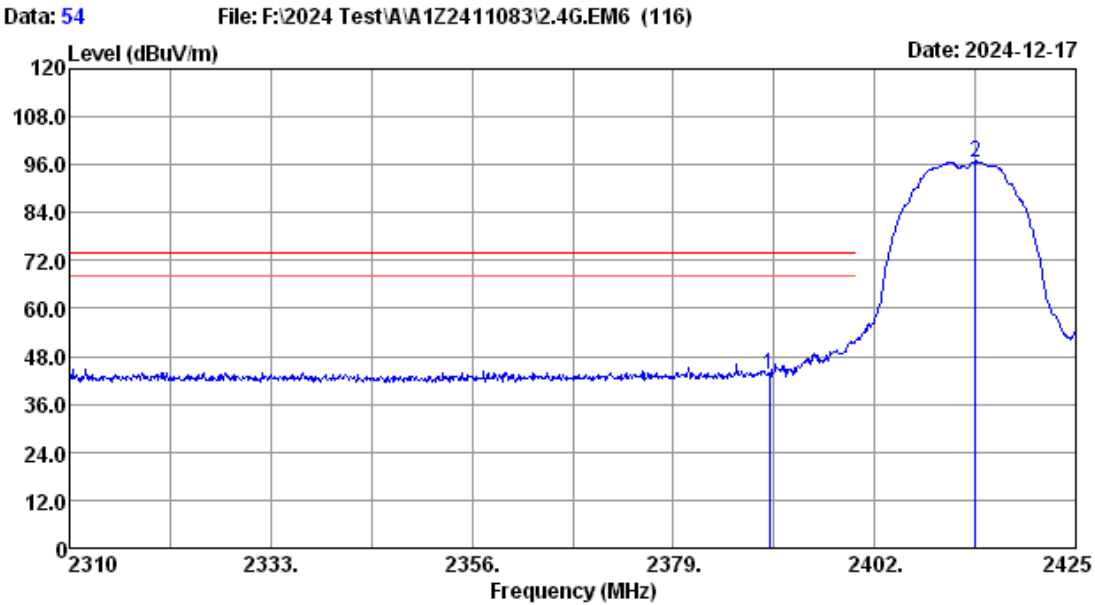

Site no. : 3m Chamber Data no. : 54
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2412 TX mode SO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	42.16	31.70	43.31	74.00	30.69	Peak
2	2413.50	27.70	5.23	95.44	31.69	96.68	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

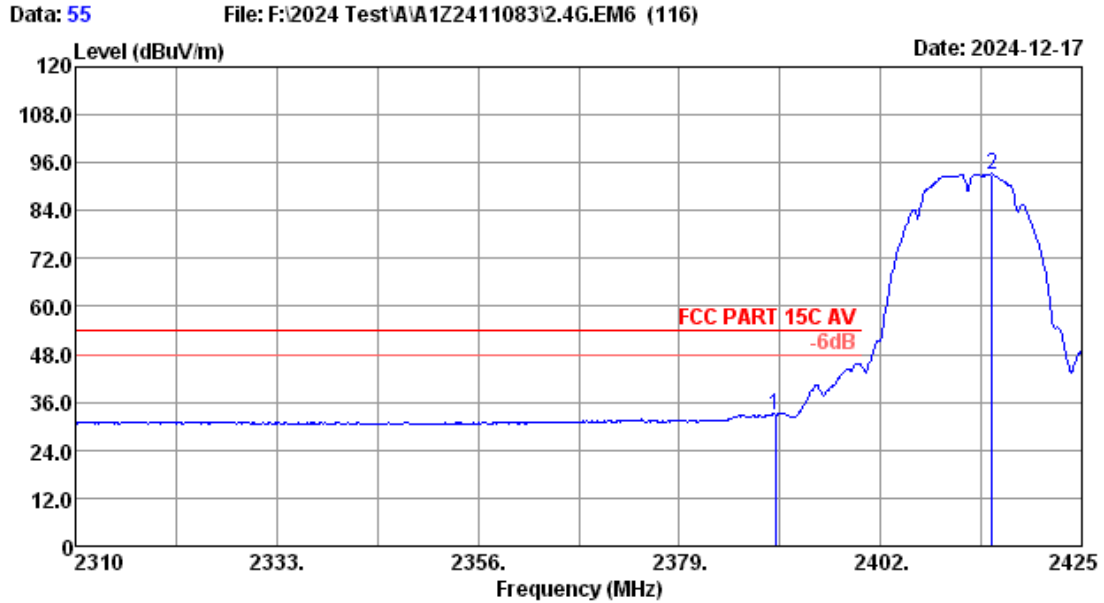

Site no. : 3m Chamber Data no. : 55
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2412 TX mode SO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	31.65	31.70	32.80	54.00	21.20	Average
2	2414.77	27.70	5.23	91.89	31.69	93.13	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

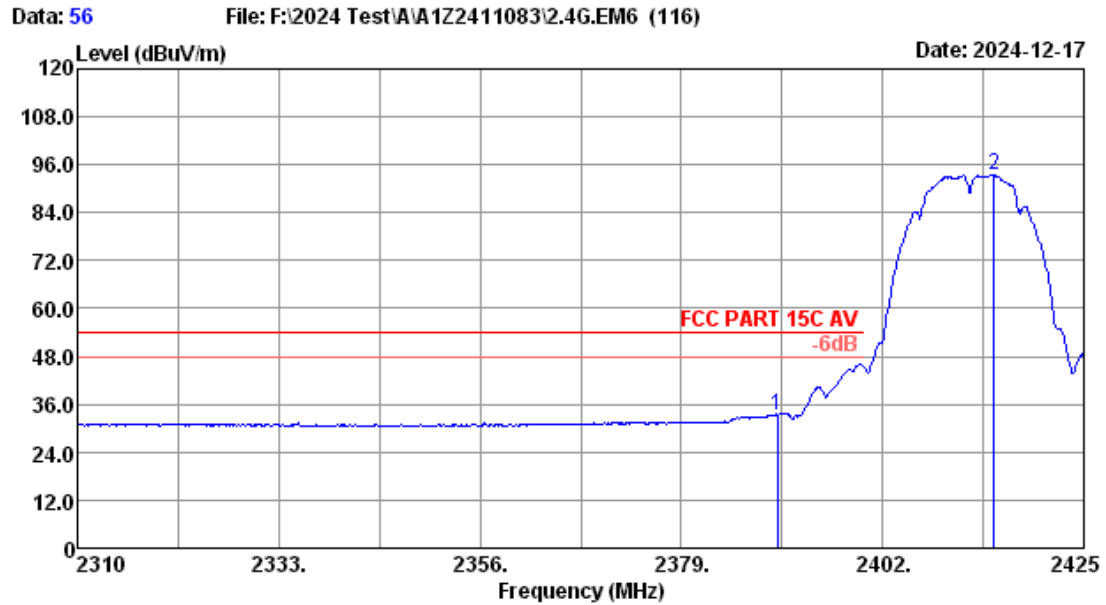

Site no. : 3m Chamber Data no. : 56
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2412 TX mode SO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	32.10	31.70	33.25	54.00	20.75	Average
2	2414.77	27.70	5.23	92.10	31.69	93.34	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

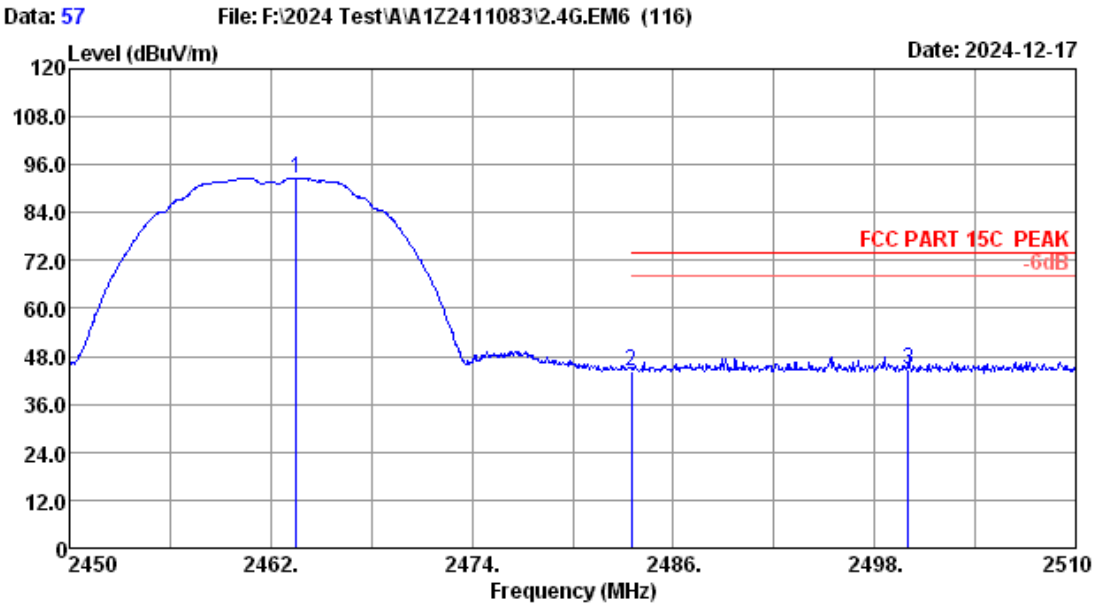

Site no. : 3m Chamber Data no. : 57
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2462 TX mode SO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.50	27.75	5.29	91.28	31.67	92.65	-----	-----	Peak
2	2483.50	27.83	5.31	42.98	31.66	44.46	74.00	29.54	Peak
3	2500.00	27.90	5.33	43.30	31.65	44.88	74.00	29.12	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

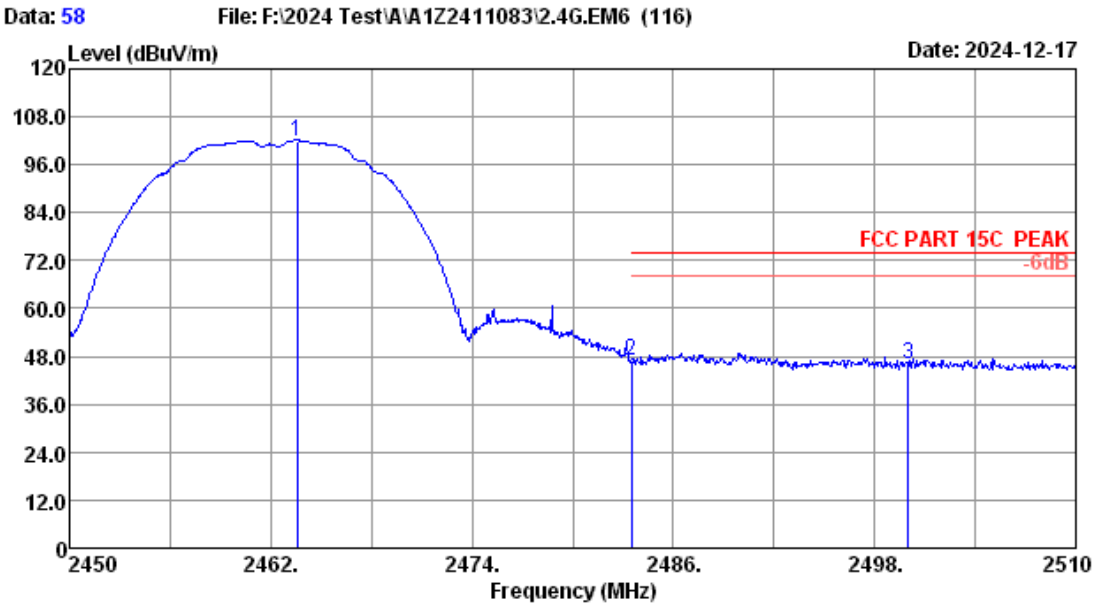

Site no. : 3m Chamber Data no. : 58
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2462 TX mode SO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.56	27.75	5.29	100.64	31.67	102.01	-----	-----	Peak
2	2483.50	27.83	5.31	45.67	31.66	47.15	74.00	26.85	Peak
3	2500.00	27.90	5.33	44.68	31.65	46.26	74.00	27.74	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

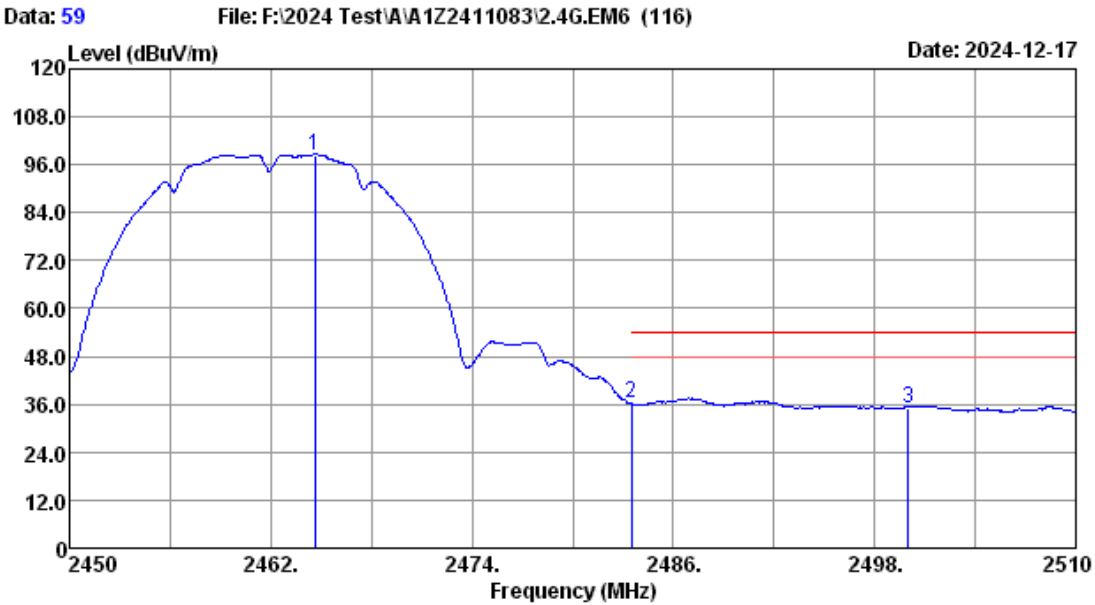

Site no. : 3m Chamber Data no. : 59
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2462 TX mode SO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2464.64	27.76	5.29	97.12	31.67	98.50	-----	-----	Average
2	2483.50	27.83	5.31	34.66	31.66	36.14	54.00	17.86	Average
3	2500.00	27.90	5.33	33.59	31.65	35.17	54.00	18.83	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

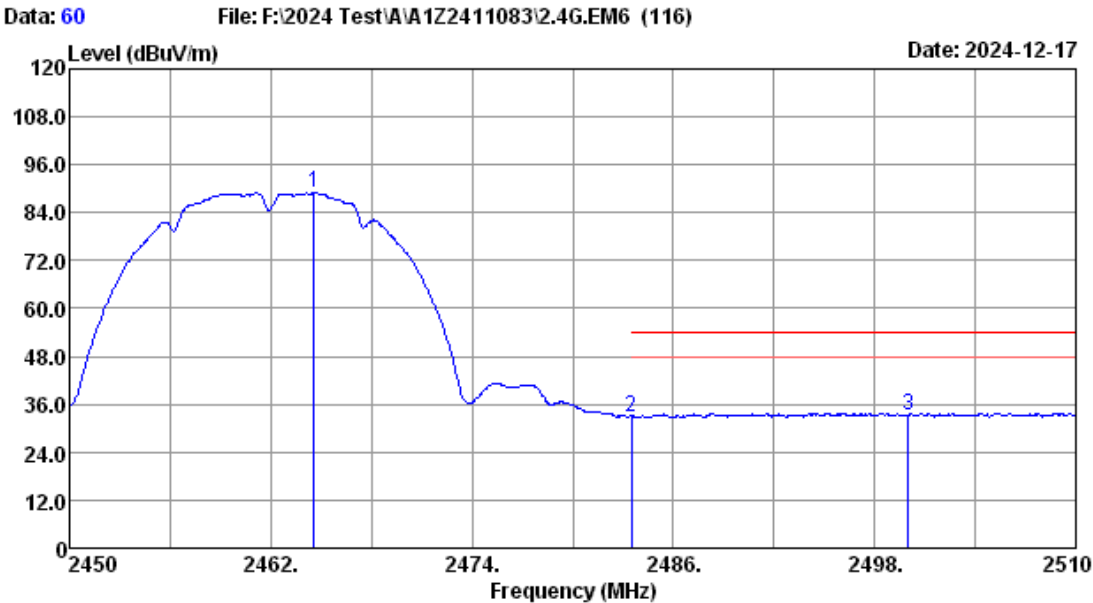


Site no. : 3m Chamber Data no. : 60
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2462 TX mode SO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2464.58	27.76	5.29	87.43	31.67	88.81	-----	-----	Average
2	2483.50	27.83	5.31	31.43	31.66	32.91	54.00	21.09	Average
3	2500.00	27.90	5.33	31.54	31.65	33.12	54.00	20.88	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.


SISO Mode ANT 1 11b

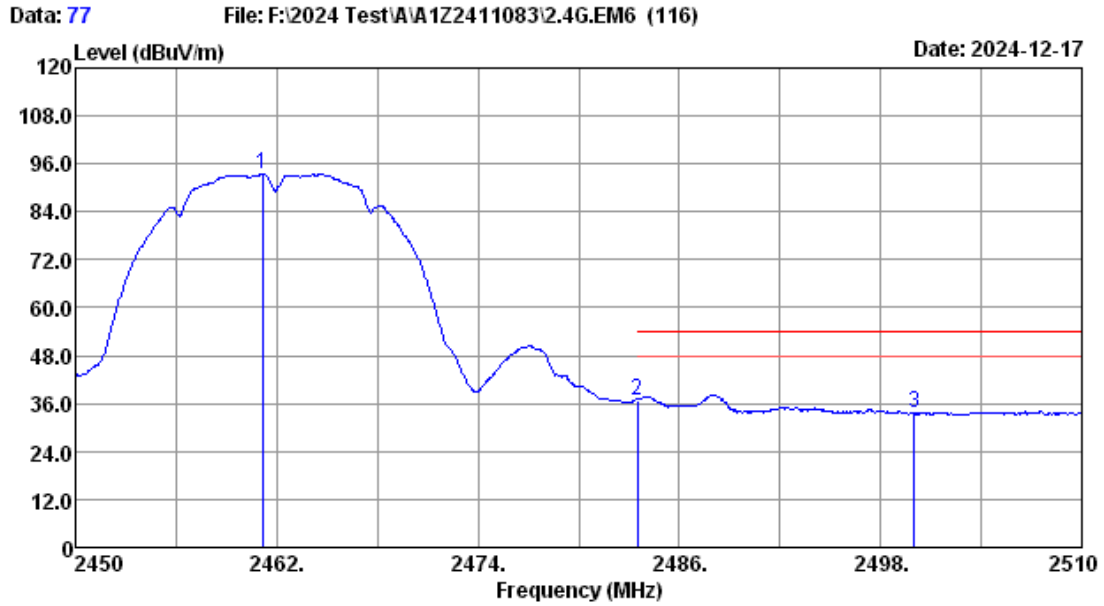

Site no. : 3m Chamber Data no. : 77
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2462 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.16	27.74	5.29	91.98	31.67	93.34	-----	-----	Average
2	2483.50	27.83	5.31	35.49	31.66	36.97	54.00	17.03	Average
3	2500.00	27.90	5.33	32.02	31.65	33.60	54.00	20.40	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

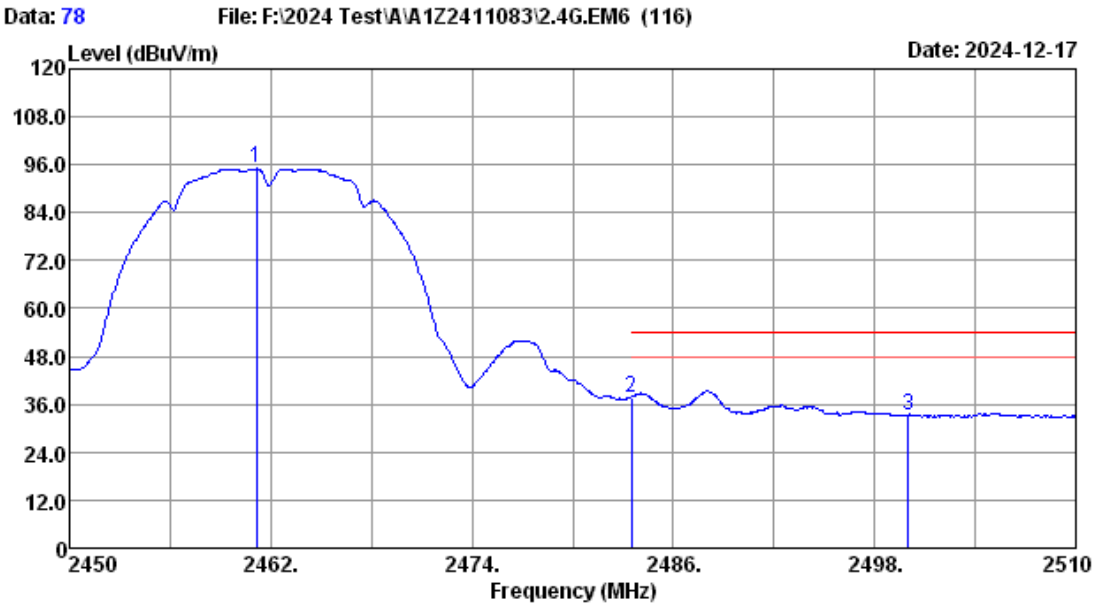

Site no. : 3m Chamber Data no. : 78
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2462 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.16	27.74	5.29	93.68	31.67	95.04	-----	-----	Average
2	2483.50	27.83	5.31	36.30	31.66	37.78	54.00	16.22	Average
3	2500.00	27.90	5.33	31.56	31.65	33.14	54.00	20.86	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

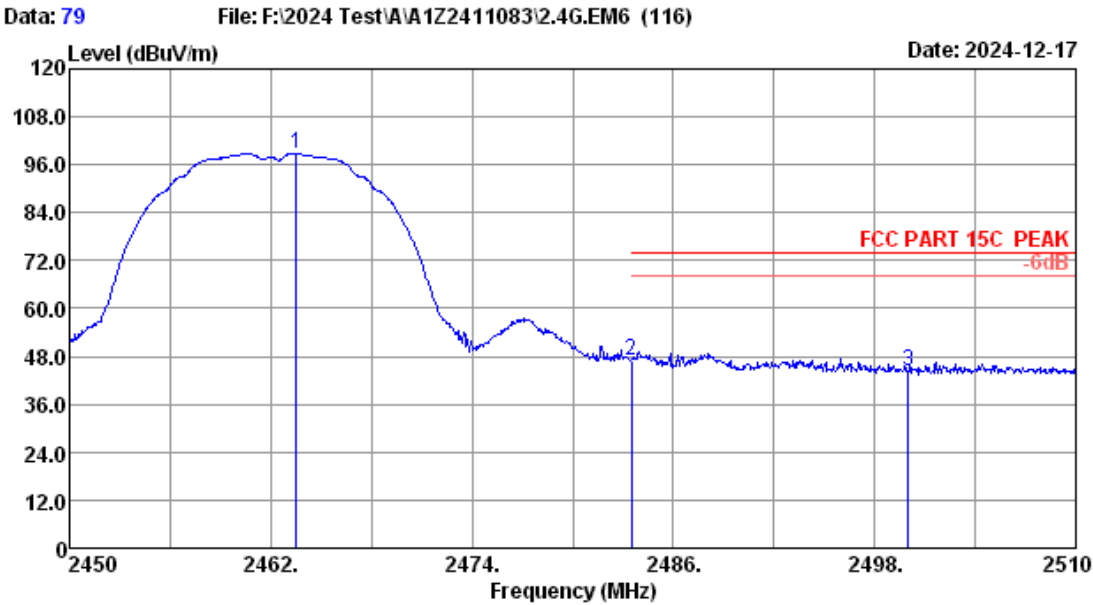

Site no. : 3m Chamber Data no. : 79
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2462 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.50	27.75	5.29	97.42	31.67	98.79	-----	-----	Peak
2	2483.50	27.83	5.31	45.63	31.66	47.11	74.00	26.89	Peak
3	2500.00	27.90	5.33	42.76	31.65	44.34	74.00	29.66	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

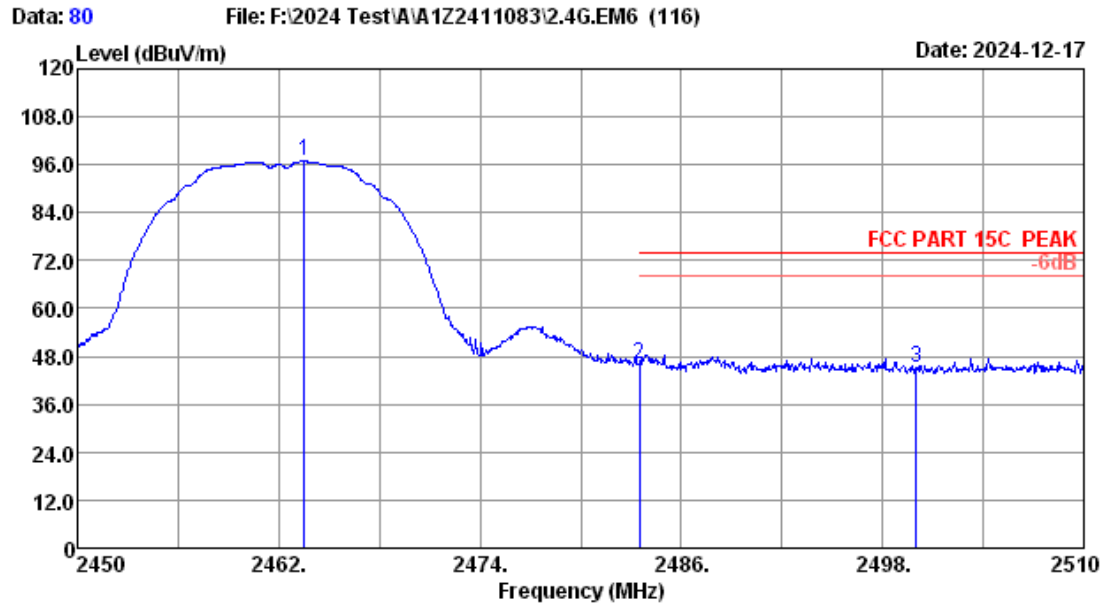

Site no. : 3m Chamber Data no. : 80
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2462 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.50	27.75	5.29	95.50	31.67	96.87	-----	-----	Peak
2	2483.50	27.83	5.31	44.62	31.66	46.10	74.00	27.90	Peak
3	2500.00	27.90	5.33	43.45	31.65	45.03	74.00	28.97	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

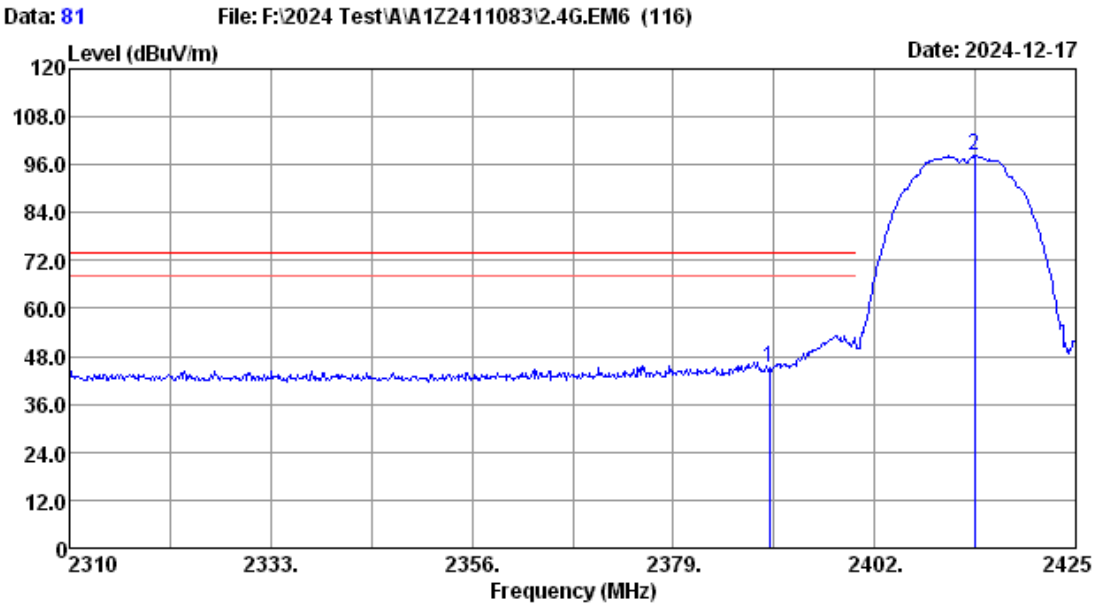

Site no. : 3m Chamber Data no. : 81
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2412 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	43.88	31.70	45.03	74.00	28.97	Peak
2	2413.46	27.70	5.23	96.90	31.69	98.14	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

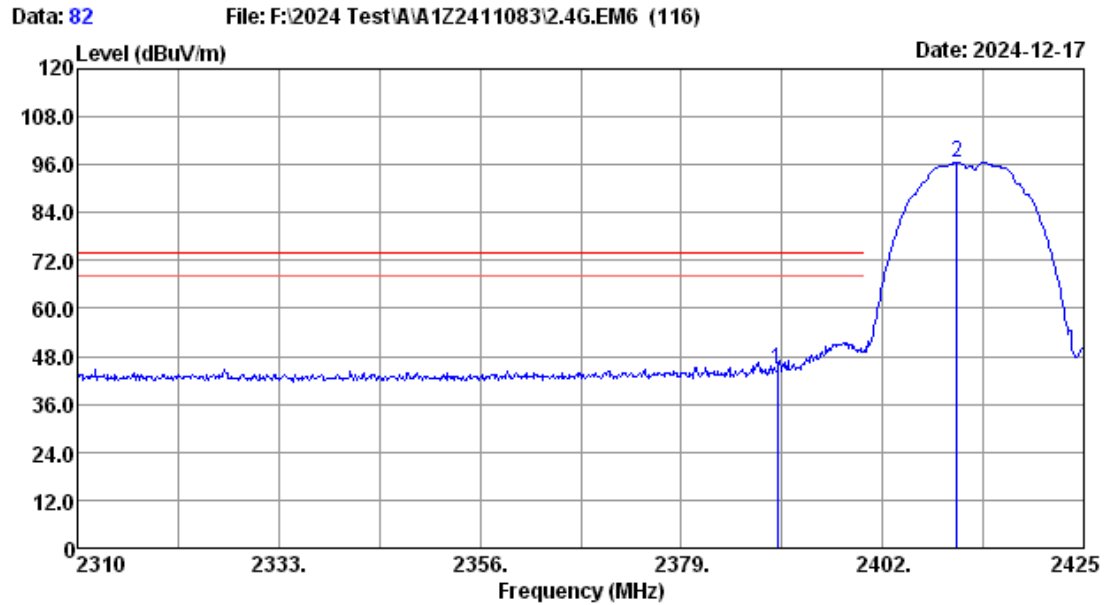

Site no. : 3m Chamber Data no. : 82
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2412 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	43.49	31.70	44.64	74.00	29.36	Peak
2	2410.52	27.70	5.23	95.26	31.69	96.50	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

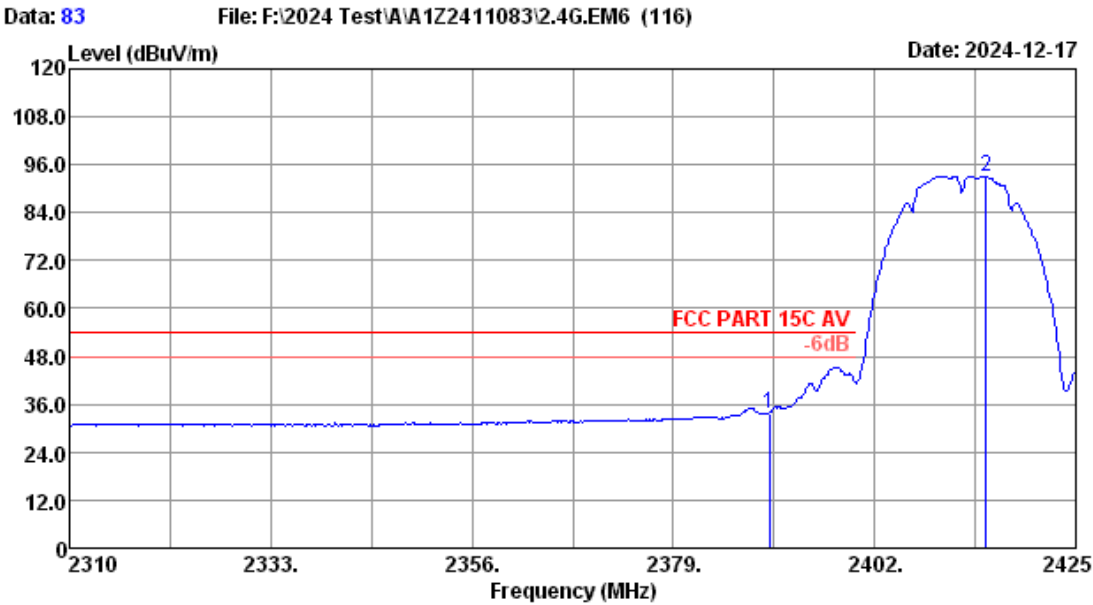

Site no. : 3m Chamber Data no. : 83
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2412 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	32.69	31.70	33.84	54.00	20.16	Average
2	2414.72	27.70	5.23	91.86	31.69	93.10	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

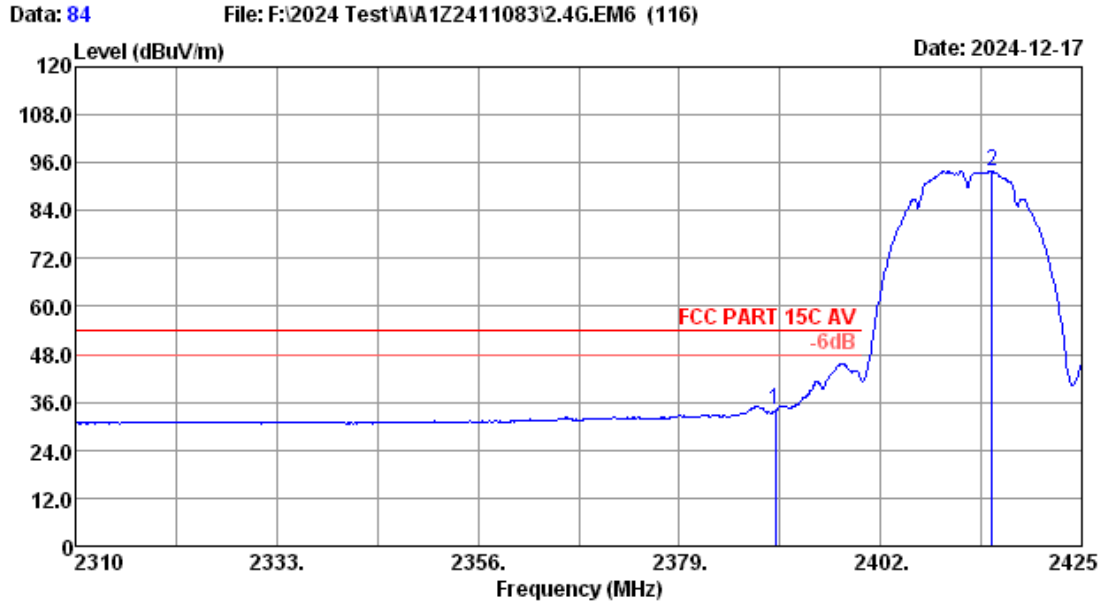


Site no. : 3m Chamber Data no. : 84
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11b 2412 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	32.74	31.70	33.89	54.00	20.11	Average
2	2414.77	27.70	5.23	92.57	31.69	93.81	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.


SISO Mode ANT0 11g

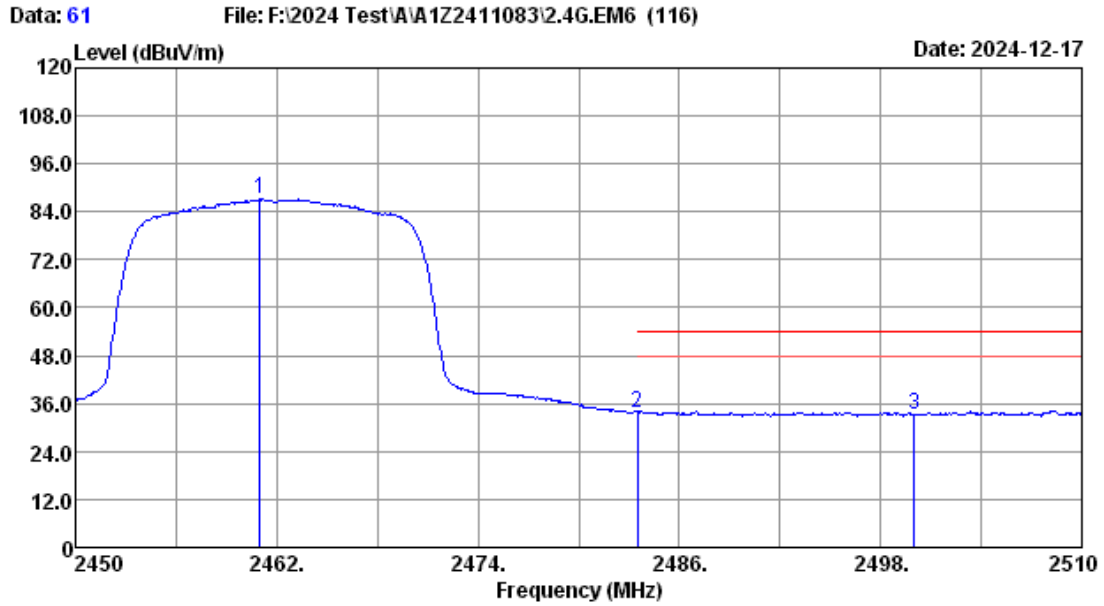

Site no. : 3m Chamber Data no. : 61
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2462 TX mode SO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2460.98	27.74	5.29	85.67	31.67	87.03	-----	-----	Average
2	2483.50	27.83	5.31	32.33	31.66	33.81	54.00	20.19	Average
3	2500.00	27.90	5.33	31.72	31.65	33.30	54.00	20.70	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

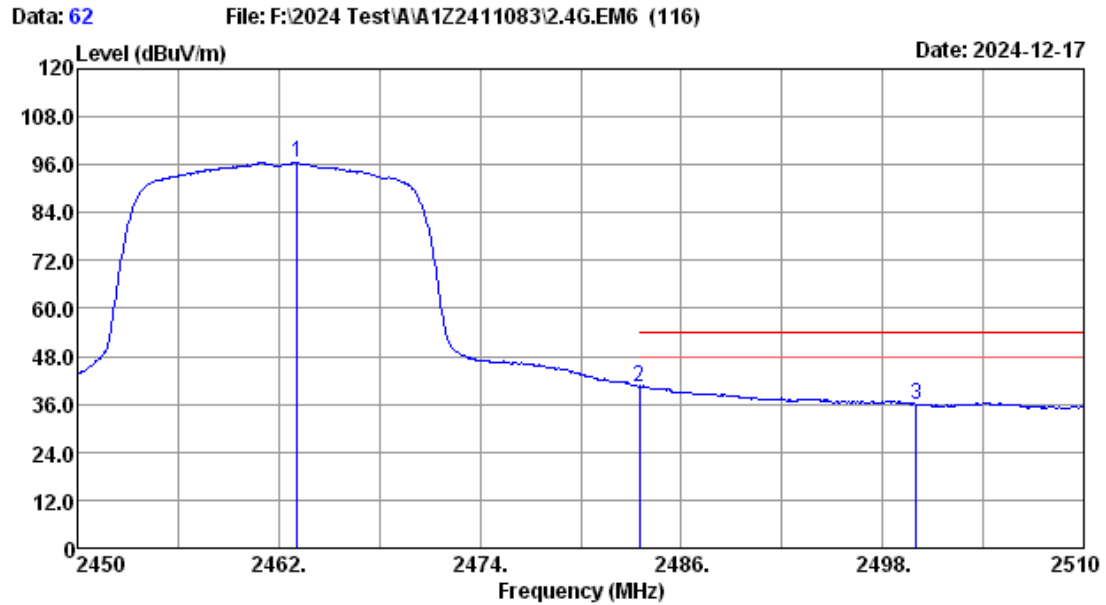

Site no. : 3m Chamber Data no. : 62
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2462 TX mode SO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.08	27.75	5.29	95.10	31.67	96.47	-----	-----	Average
2	2483.50	27.83	5.31	38.86	31.66	40.34	54.00	13.66	Average
3	2500.00	27.90	5.33	34.38	31.65	35.96	54.00	18.04	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

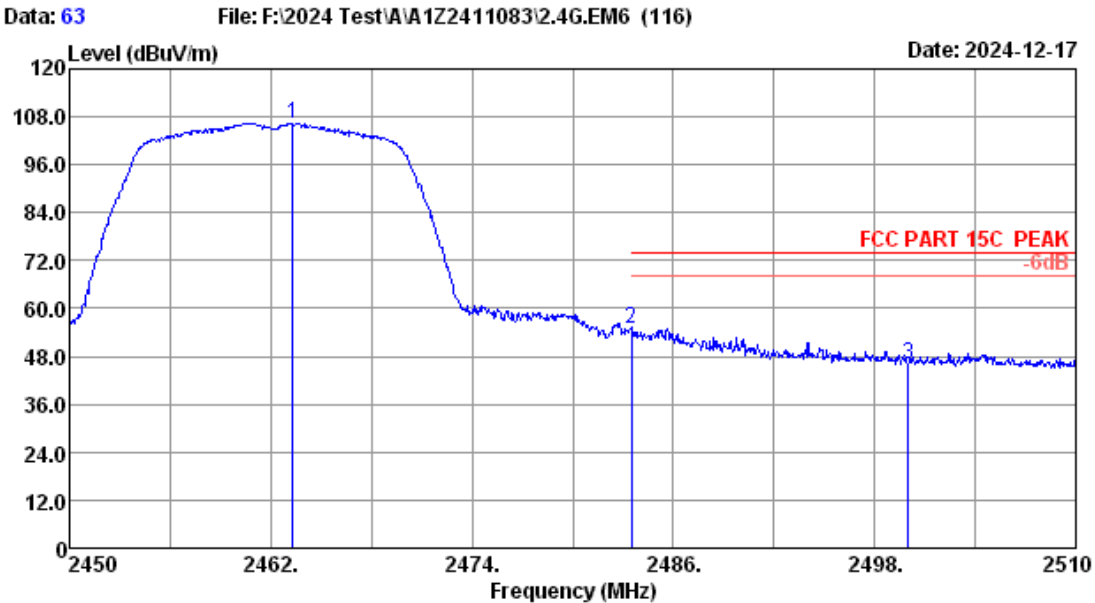

Site no. : 3m Chamber Data no. : 63
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2462 TX mode SO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.32	27.75	5.29	105.00	31.67	106.37	-----	-----	Peak
2	2483.50	27.83	5.31	53.36	31.66	54.84	74.00	19.16	Peak
3	2500.00	27.90	5.33	44.56	31.65	46.14	74.00	27.86	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

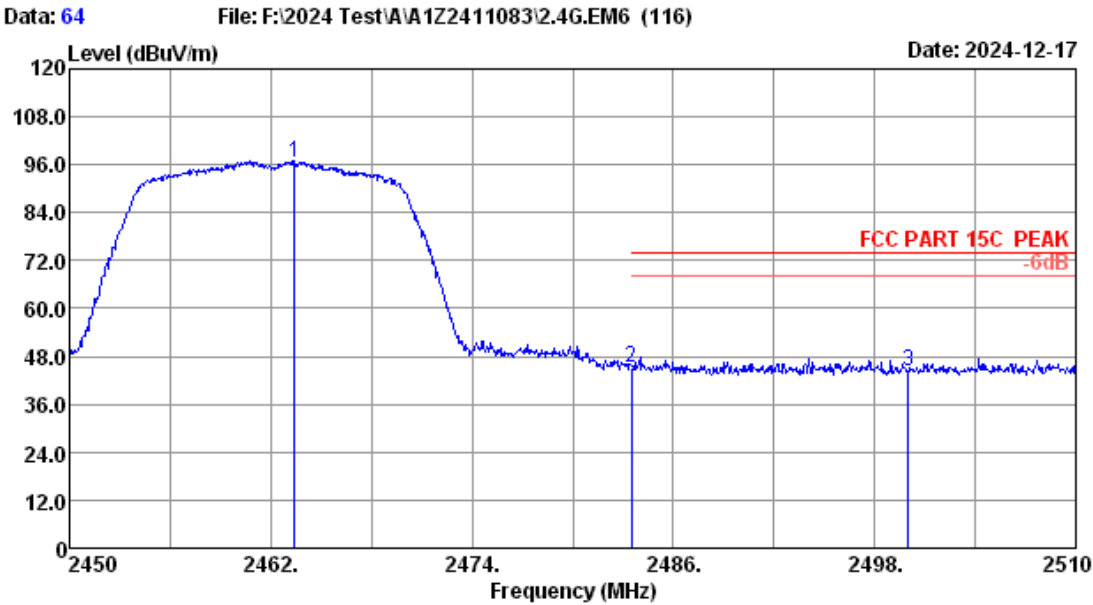

Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2462 TX mode SO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.44	27.75	5.29	95.37	31.67	96.74	-----	-----	Peak
2	2483.50	27.83	5.31	43.87	31.66	45.35	74.00	28.65	Peak
3	2500.00	27.90	5.33	42.57	31.65	44.15	74.00	29.85	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

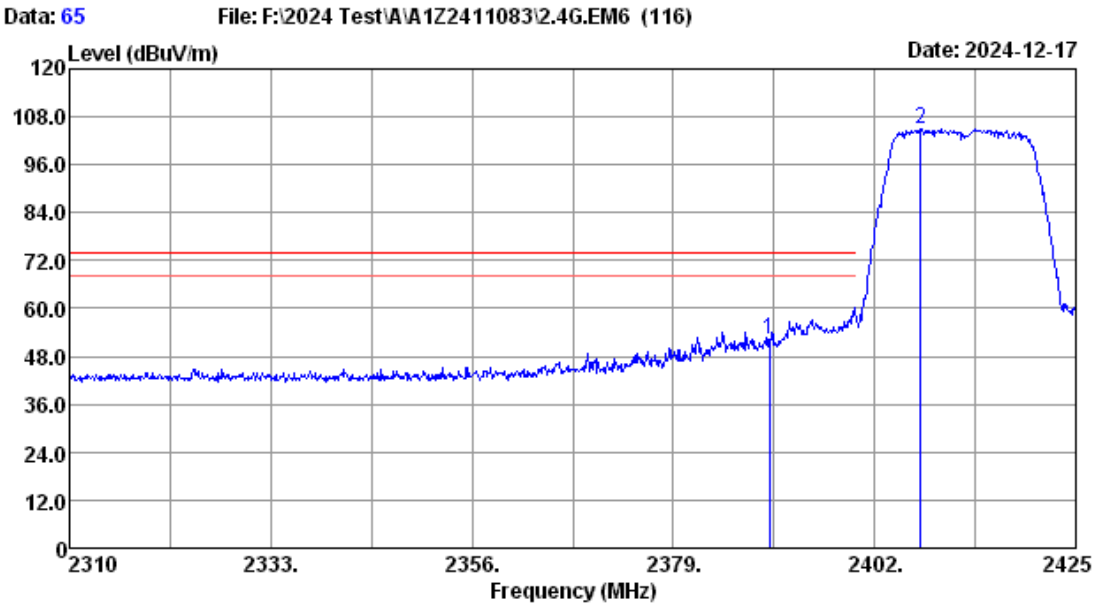

Site no. : 3m Chamber Data no. : 65
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.2°C/52.5% Engineer : Evan
Power rating :
Test Mode : 2.4G 11g 2412 TX mode SO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	50.99	31.70	52.14	74.00	21.86	Peak
2	2407.29	27.70	5.23	103.52	31.70	104.75	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

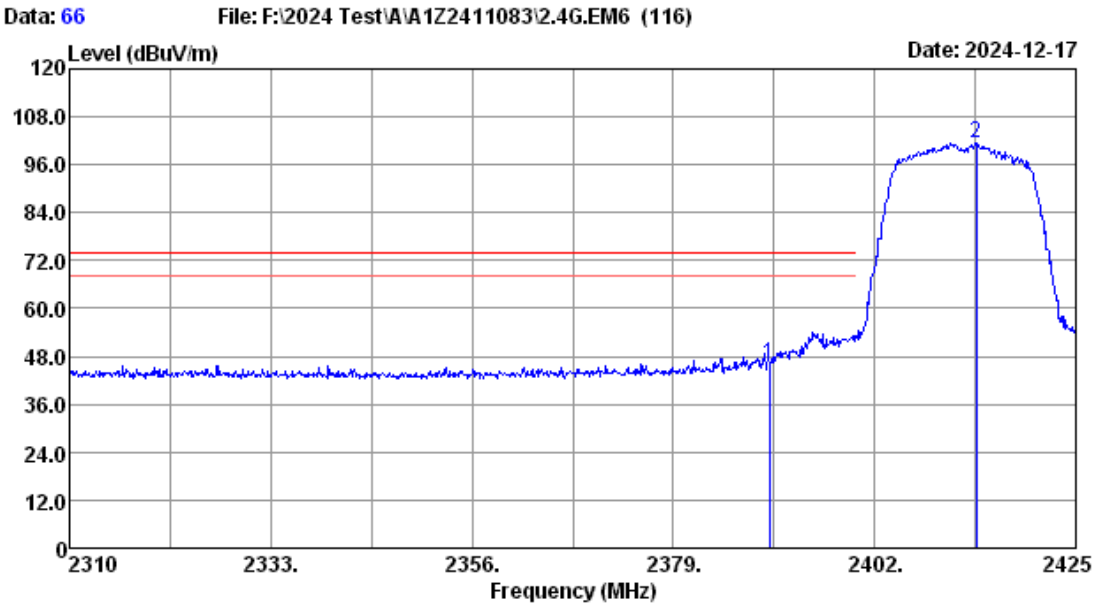

Site no. : 3m Chamber Data no. : 66
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.2°C/52.5% Engineer : Evan
Power rating :
Test Mode : 2.4G 11g 2412 TX mode SO

No.	Freq. (MHz)	Ant.	Cable	Reading (dBuV)	Amp	Emission	Limits (dBuV/m)	Margin (dB)	Remark
		Factor (dB/m)	Loss (dB)		factor (dB)	Level (dBuV/m)			
1	2390.00	27.64	5.21	44.95	31.70	46.10	74.00	27.90	Peak
2	2413.62	27.70	5.23	100.01	31.69	101.25	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

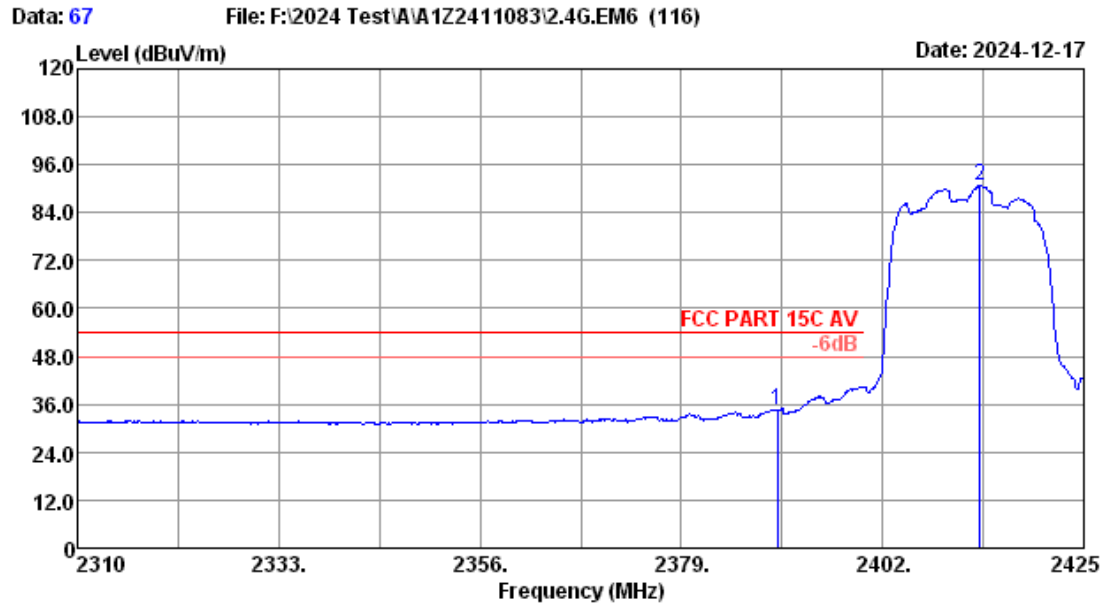

Site no. : 3m Chamber Data no. : 67
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2412 TX mode SO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	33.50	31.70	34.65	54.00	19.35	Average
2	2413.16	27.70	5.23	89.46	31.69	90.70	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

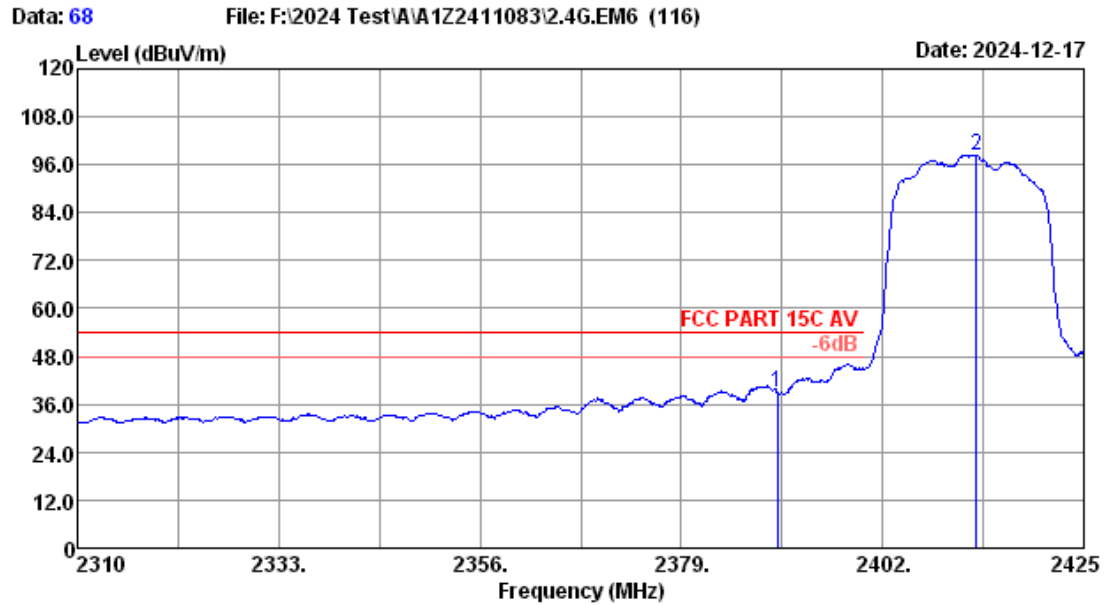


Site no. : 3m Chamber Data no. : 68
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2412 TX mode SO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	37.78	31.70	38.93	54.00	15.07	Average
2	2412.70	27.70	5.23	97.16	31.69	98.40	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.


SISO Mode ANT1 11g

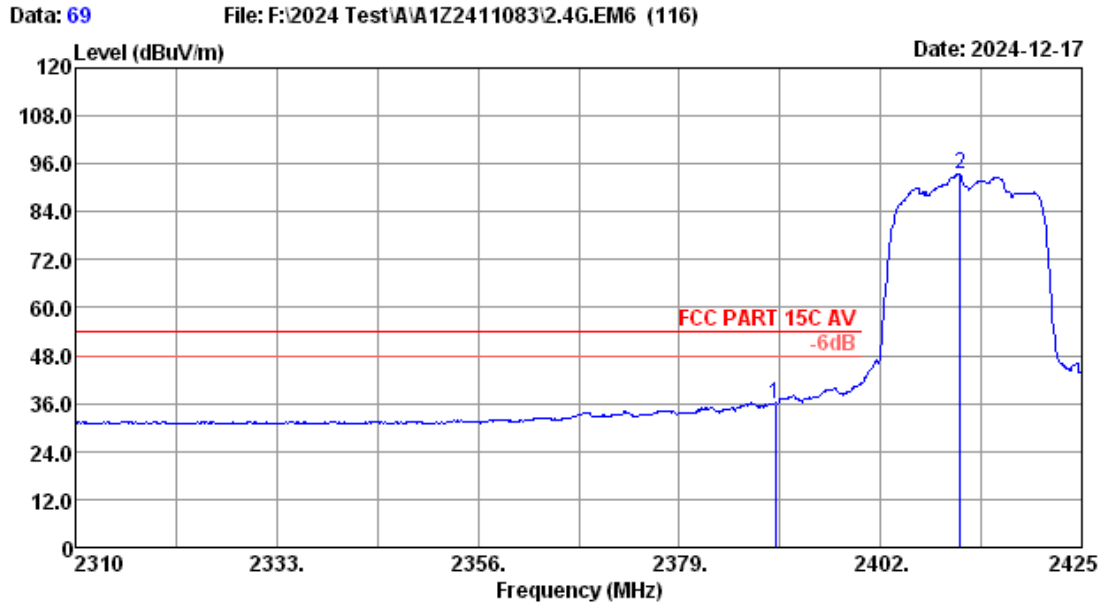

Site no. : 3m Chamber Data no. : 69
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2412 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	34.86	31.70	36.01	54.00	17.99	Average
2	2411.09	27.70	5.23	92.06	31.69	93.30	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

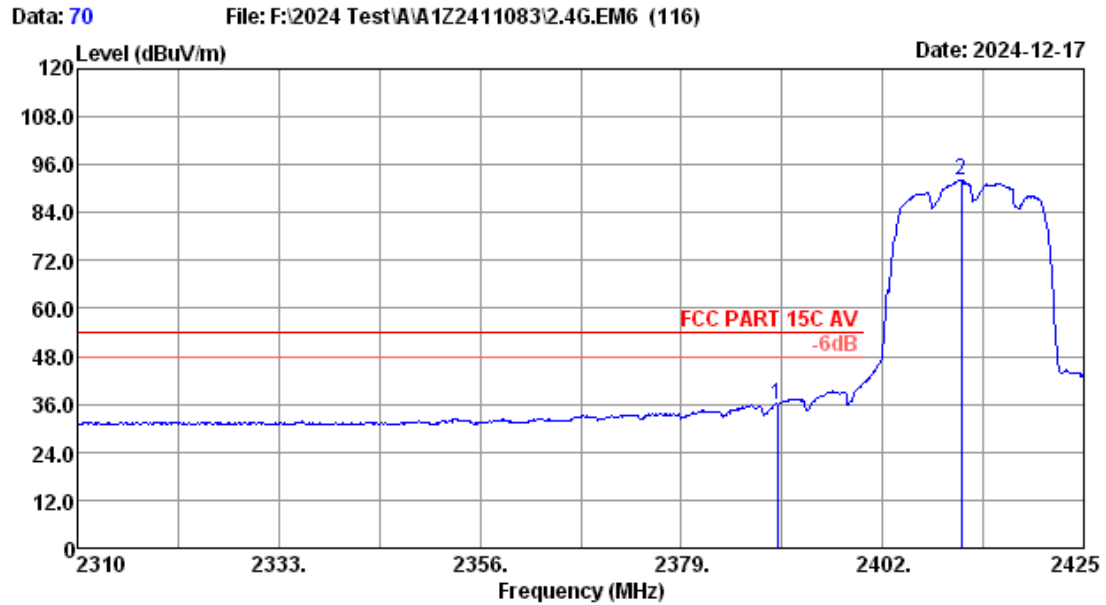

Site no. : 3m Chamber Data no. : 70
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2412 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	34.80	31.70	35.95	54.00	18.05	Peak
2	2410.97	27.70	5.23	90.69	31.69	91.93	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

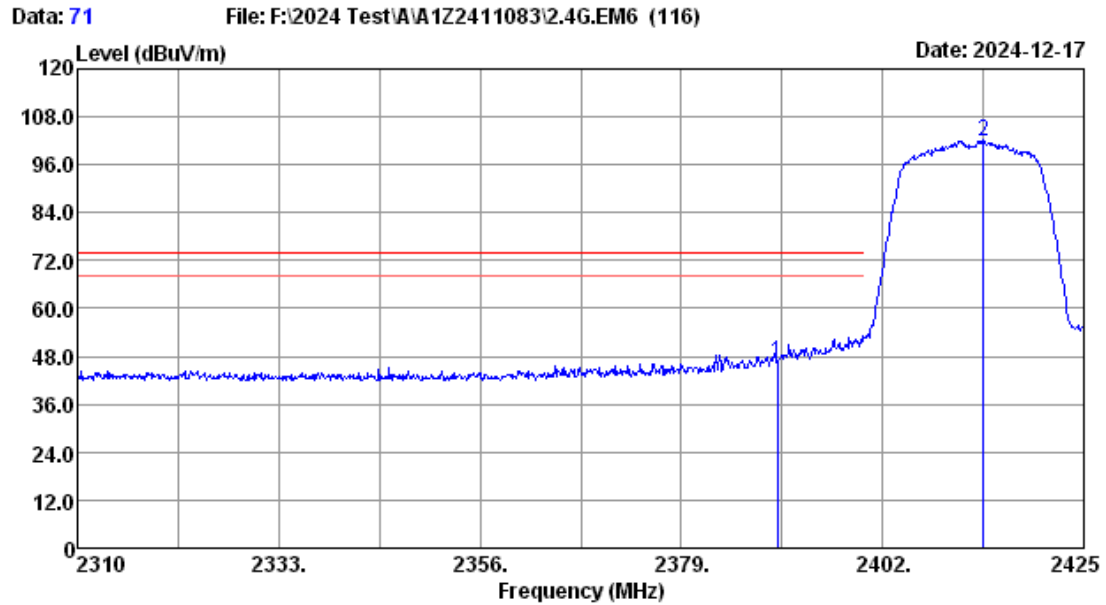

Site no. : 3m Chamber Data no. : 71
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2412 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	45.33	31.70	46.48	74.00	27.52	Peak
2	2413.50	27.70	5.23	100.81	31.69	102.05	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

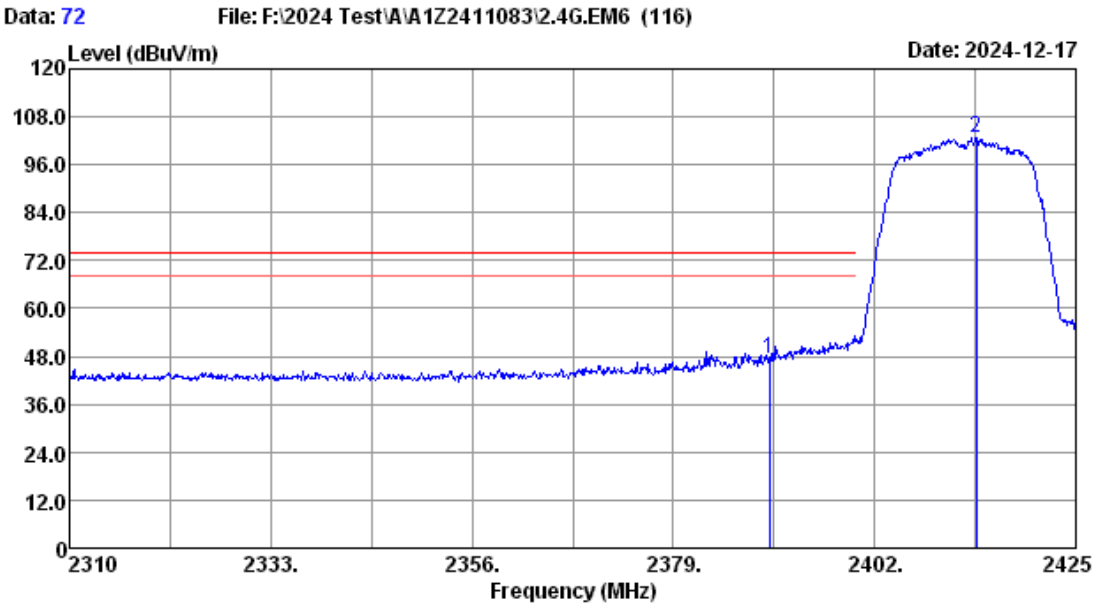

Site no. : 3m Chamber Data no. : 72
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2412 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	46.14	31.70	47.29	74.00	26.71	Peak
2	2413.62	27.70	5.23	101.35	31.69	102.59	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

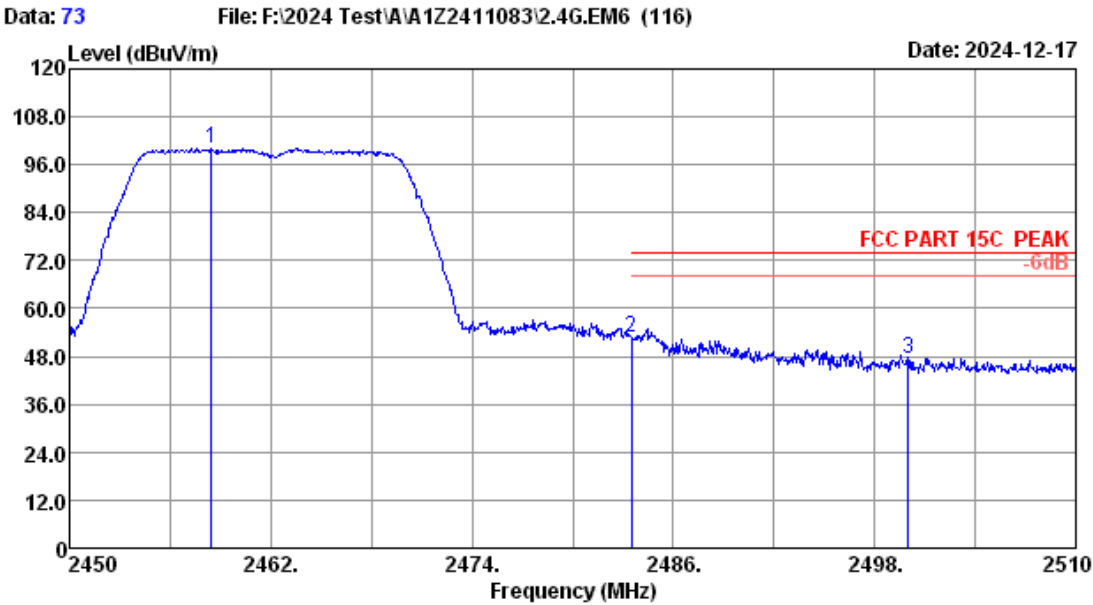

Site no. : 3m Chamber Data no. : 73
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2462 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2458.46	27.73	5.29	98.59	31.67	99.94	-----	-----	Peak
2	2483.50	27.83	5.31	51.29	31.66	52.77	74.00	21.23	Peak
3	2500.00	27.90	5.33	45.94	31.65	47.52	74.00	26.48	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

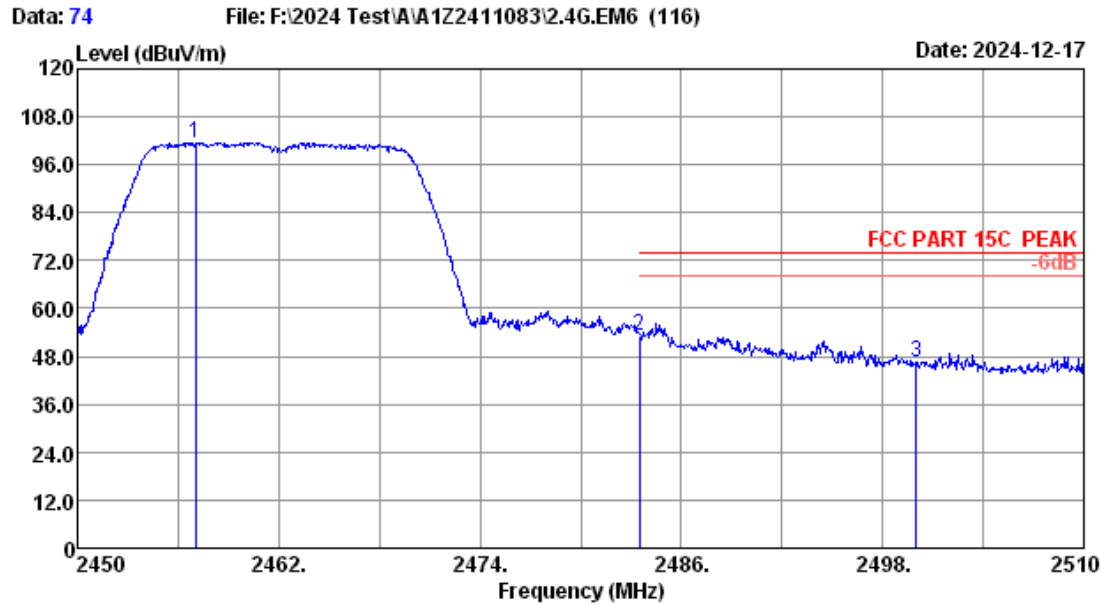

Site no. : 3m Chamber Data no. : 74
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2462 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2457.02	27.73	5.27	100.21	31.67	101.54	-----	-----	Peak
2	2483.50	27.83	5.31	51.80	31.66	53.28	74.00	20.72	Peak
3	2500.00	27.90	5.33	44.79	31.65	46.37	74.00	27.63	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

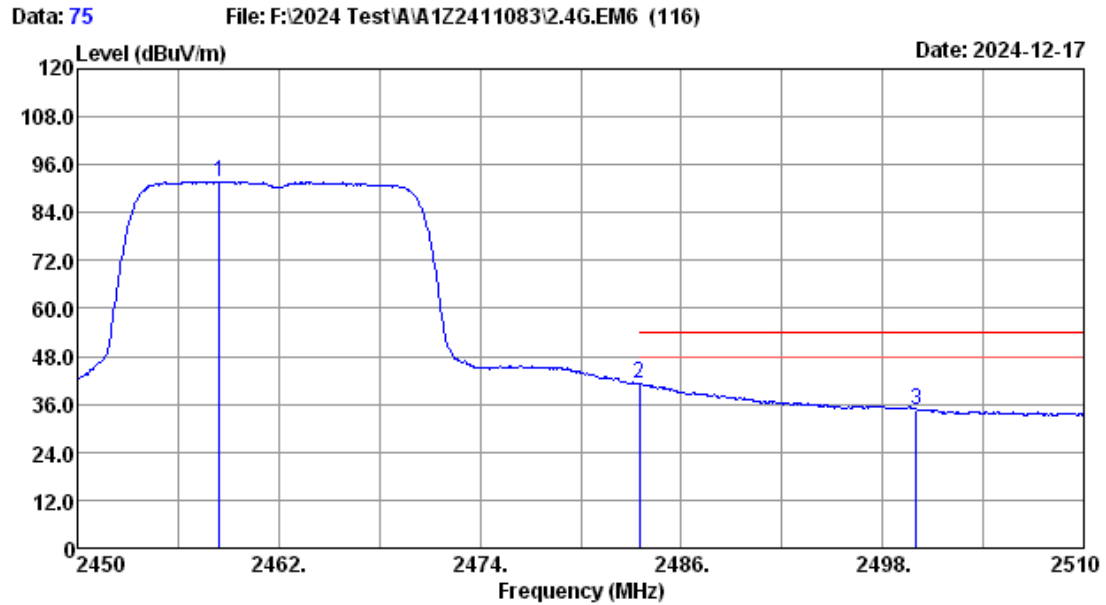

Site no. : 3m Chamber Data no. : 75
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2462 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2458.46	27.73	5.29	90.42	31.67	91.77	-----	-----	Average
2	2483.50	27.83	5.31	39.55	31.66	41.03	54.00	12.97	Average
3	2500.00	27.90	5.33	33.08	31.65	34.66	54.00	19.34	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

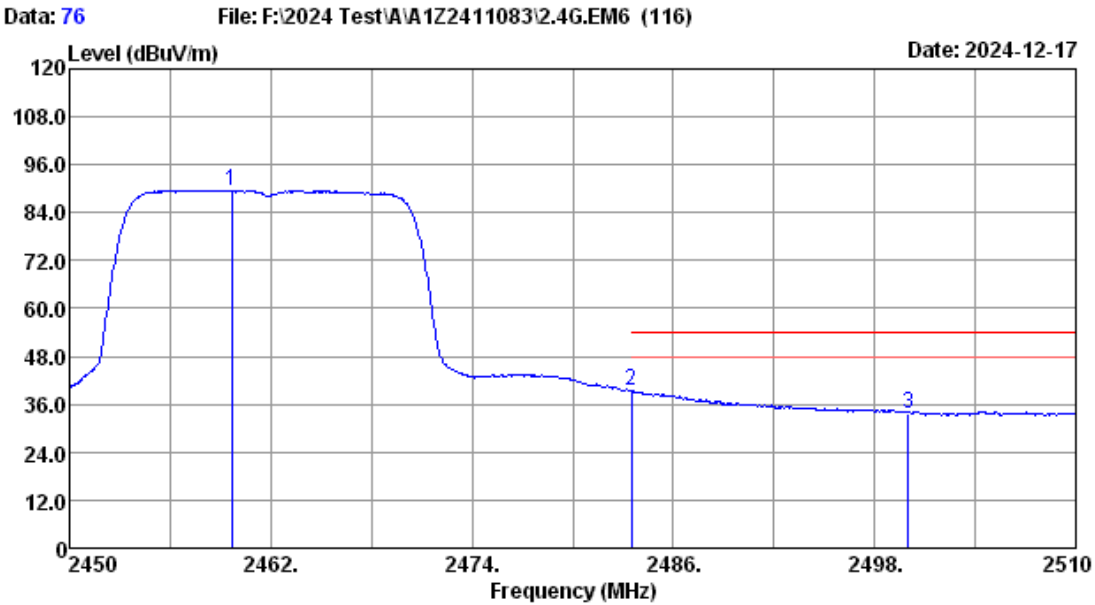


Site no. : 3m Chamber Data no. : 76
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11g 2462 TX mode S1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2459.66	27.74	5.29	88.25	31.67	89.61	-----	-----	Average
2	2483.50	27.83	5.31	37.77	31.66	39.25	54.00	14.75	Average
3	2500.00	27.90	5.33	32.21	31.65	33.79	54.00	20.21	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.


MIMO Mode 11n20

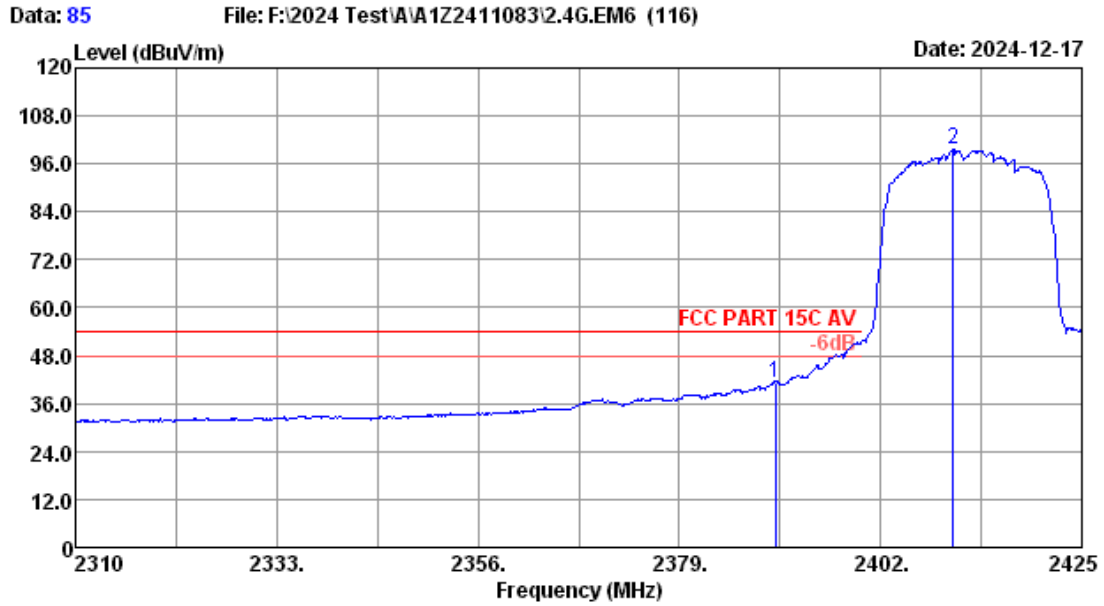

Site no. : 3m Chamber Data no. : 85
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n 2412 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	40.23	31.70	41.38	54.00	12.62	Average
2	2410.28	27.70	5.23	98.29	31.69	99.53	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

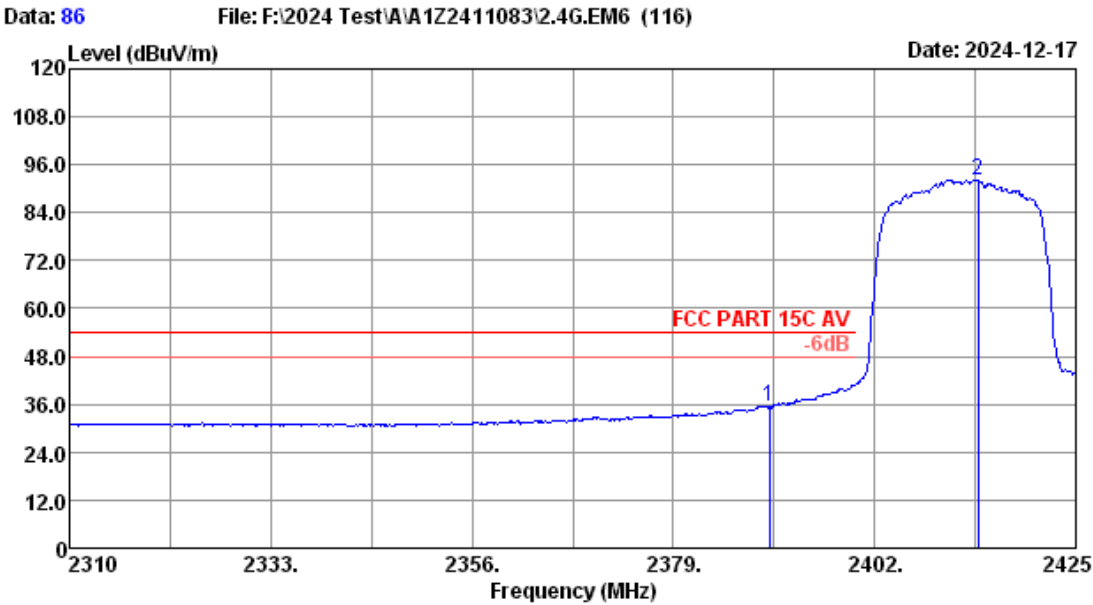

Site no. : 3m Chamber Data no. : 86
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n 2412 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	34.34	31.70	35.49	54.00	18.51	Peak
2	2413.85	27.70	5.23	90.84	31.69	92.08	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

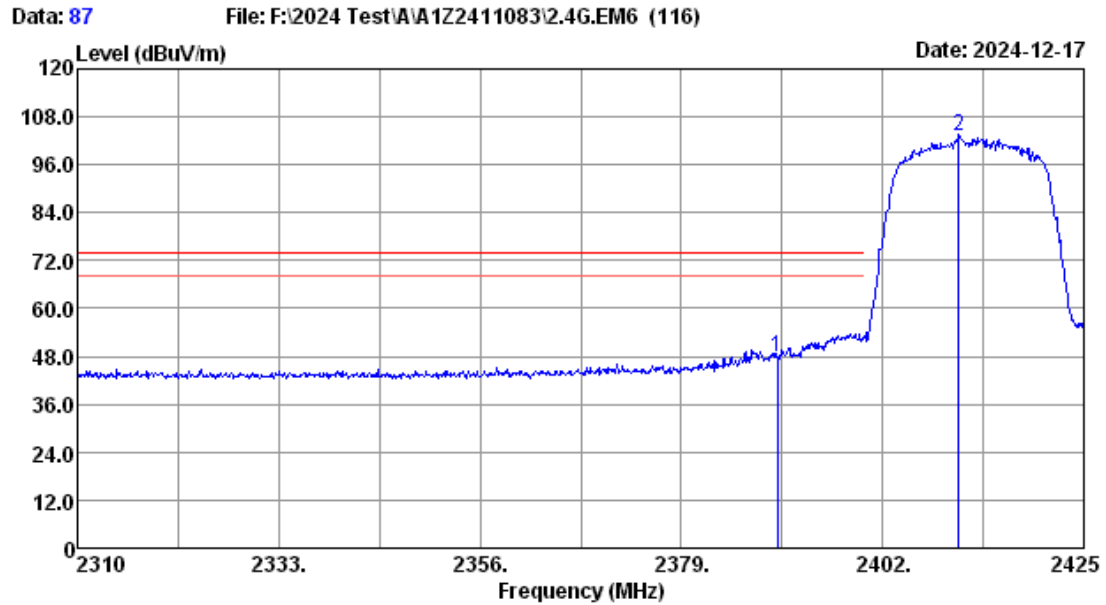

Site no. : 3m Chamber Data no. : 87
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n 2412 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	46.60	31.70	47.75	74.00	26.25	Peak
2	2410.74	27.70	5.23	102.09	31.69	103.33	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

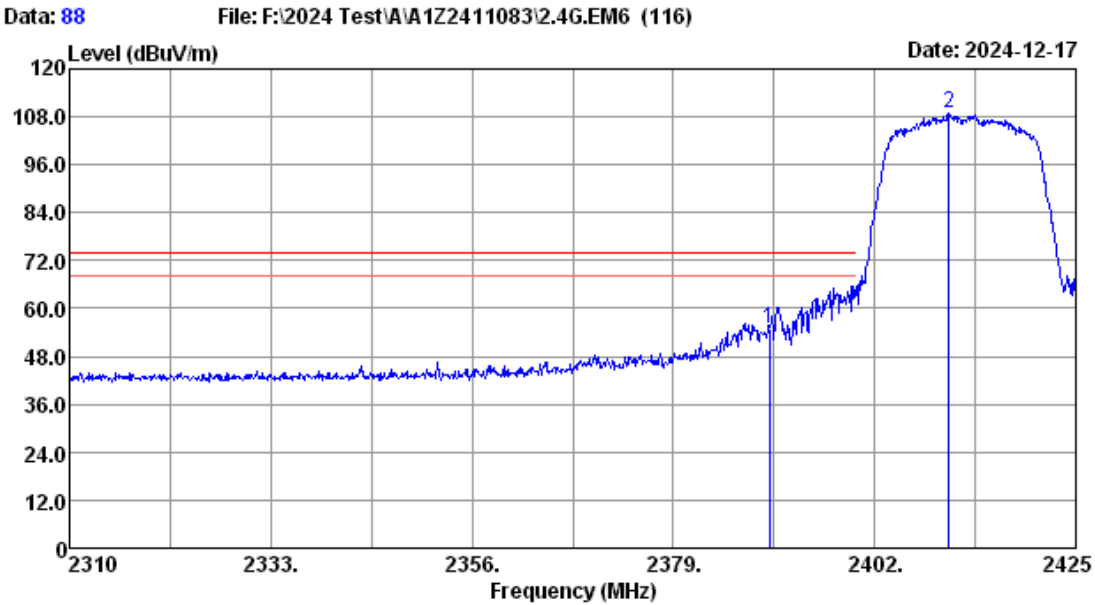

Site no. : 3m Chamber Data no. : 88
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.2°C/52.5% Engineer : Evan
Power rating :
Test Mode : 2.4G 11n 2412 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	53.97	31.70	55.12	74.00	18.88	Peak
2	2410.51	27.70	5.23	107.62	31.69	108.86	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

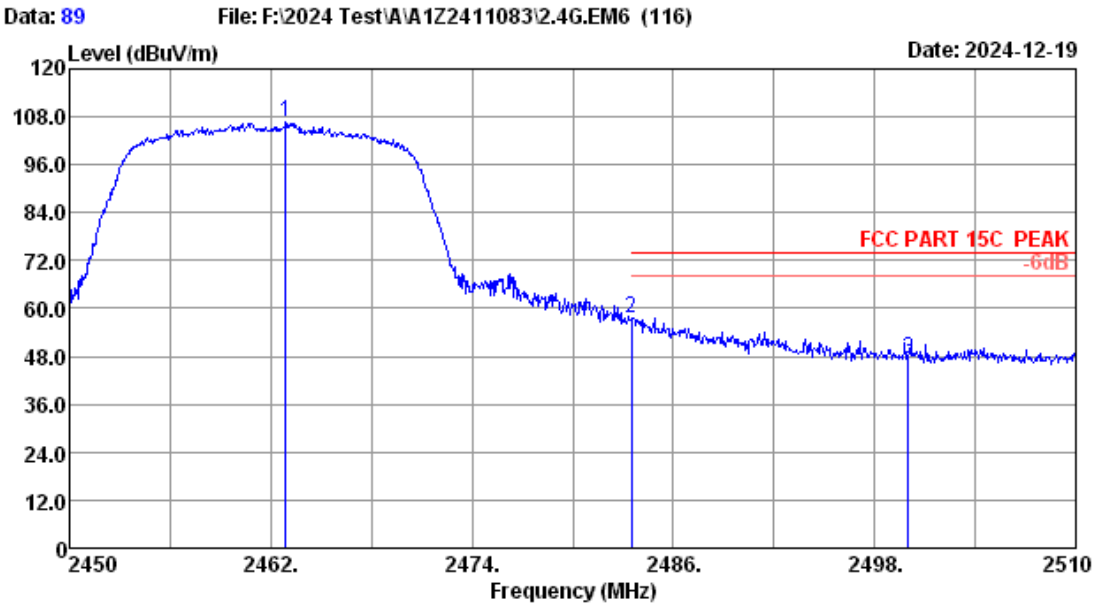

Site no. : 3m Chamber Data no. : 89
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n 2462 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.90	27.75	5.29	105.23	31.67	106.60	-----	-----	Peak
2	2483.50	27.83	5.31	56.27	31.66	57.75	74.00	16.25	Peak
3	2500.00	27.90	5.33	45.92	31.65	47.50	74.00	26.50	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

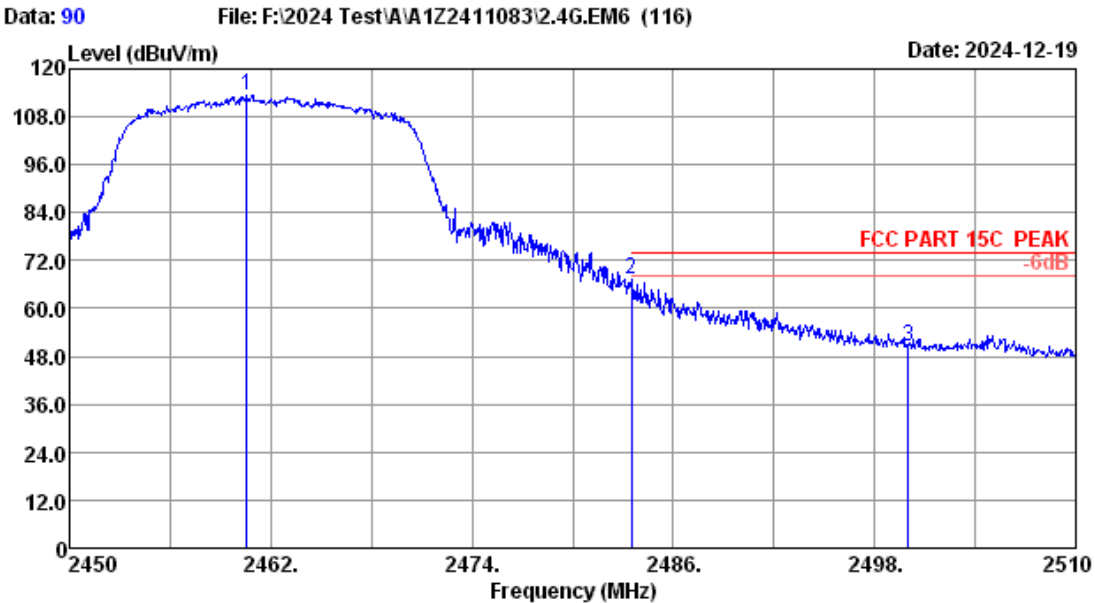

Site no. : 3m Chamber Data no. : 90
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n 2462 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2460.56	27.74	5.29	111.99	31.67	113.35	-----	-----	Peak
2	2483.50	27.83	5.31	65.90	31.66	67.38	74.00	6.62	Peak
3	2500.00	27.90	5.33	48.89	31.65	50.47	74.00	23.53	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

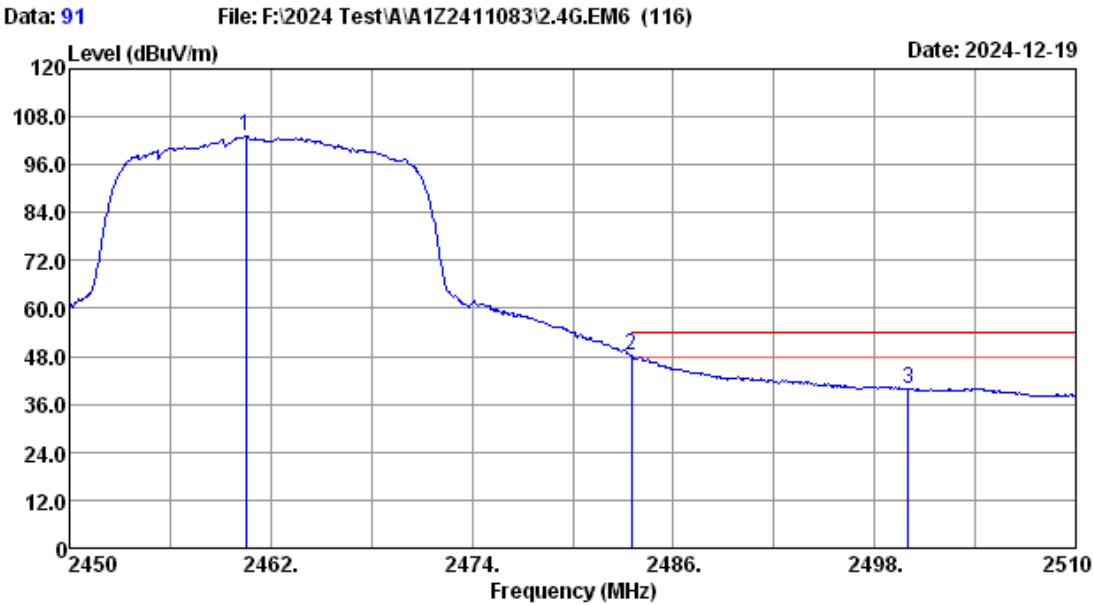

Site no. : 3m Chamber Data no. : 91
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n 2462 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2460.50	27.74	5.29	101.70	31.67	103.06	-----	-----	Average
2	2483.50	27.83	5.31	46.63	31.66	48.11	54.00	5.89	Average
3	2500.00	27.90	5.33	38.09	31.65	39.67	54.00	14.33	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

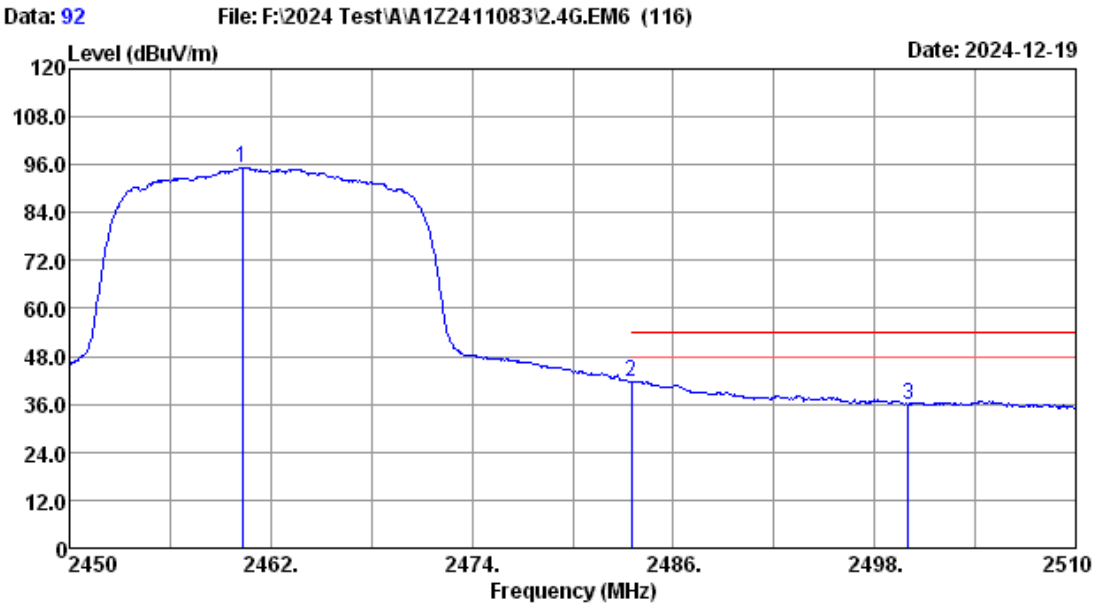


Site no. : 3m Chamber Data no. : 92
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n 2462 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2460.32	27.74	5.29	93.98	31.67	95.34	-----	-----	Average
2	2483.50	27.83	5.31	40.08	31.66	41.56	54.00	12.44	Average
3	2500.00	27.90	5.33	34.38	31.65	35.96	54.00	18.04	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.


MIMO Mode 11ax 20

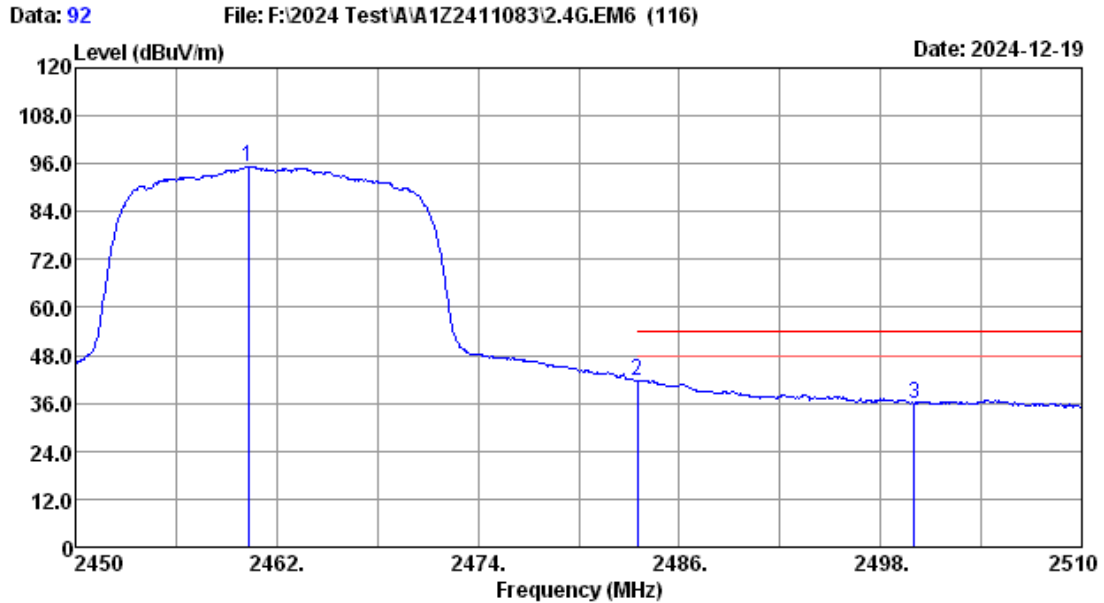

Site no. : 3m Chamber Data no. : 92
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n 2462 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2460.32	27.74	5.29	93.98	31.67	95.34	-----	-----	Average
2	2483.50	27.83	5.31	40.08	31.66	41.56	54.00	12.44	Average
3	2500.00	27.90	5.33	34.38	31.65	35.96	54.00	18.04	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

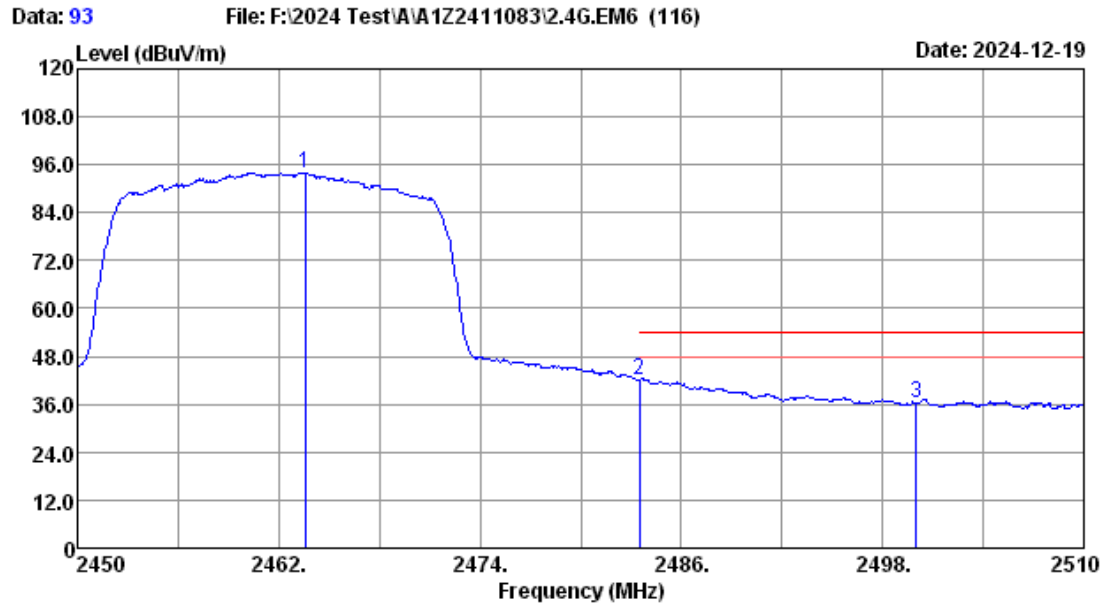

Site no. : 3m Chamber Data no. : 93
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax 2462 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.56	27.75	5.29	92.72	31.67	94.09	-----	-----	Average
2	2483.50	27.83	5.31	40.64	31.66	42.12	54.00	11.88	Average
3	2500.00	27.90	5.33	34.73	31.65	36.31	54.00	17.69	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

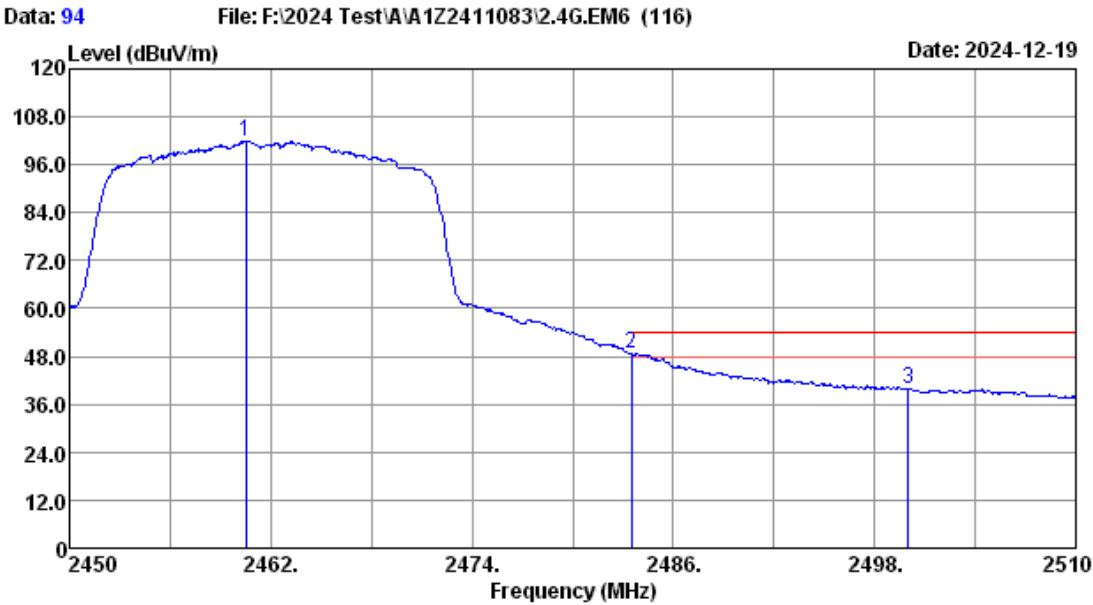

Site no. : 3m Chamber Data no. : 94
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax 2462 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2460.50	27.74	5.29	100.48	31.67	101.84	-----	-----	Average
2	2483.50	27.83	5.31	47.08	31.66	48.56	54.00	5.44	Average
3	2500.00	27.90	5.33	38.11	31.65	39.69	54.00	14.31	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

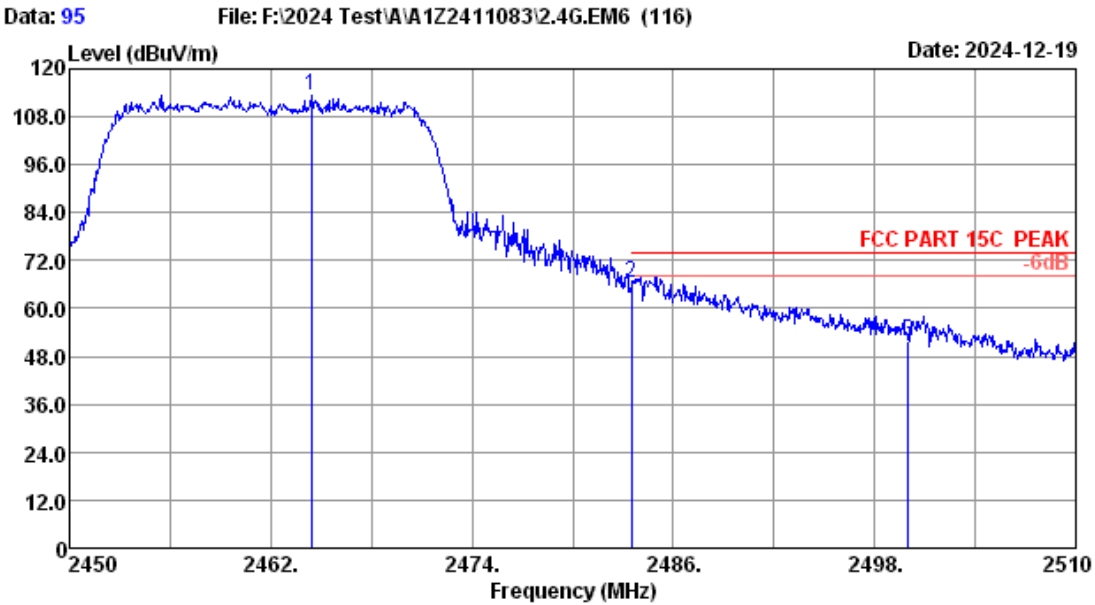

Site no. : 3m Chamber Data no. : 95
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax 2462 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2464.40	27.76	5.29	112.06	31.67	113.44	-----	-----	Peak
2	2483.50	27.83	5.31	65.06	31.66	66.54	74.00	7.46	Peak
3	2500.00	27.90	5.33	50.42	31.65	52.00	74.00	22.00	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

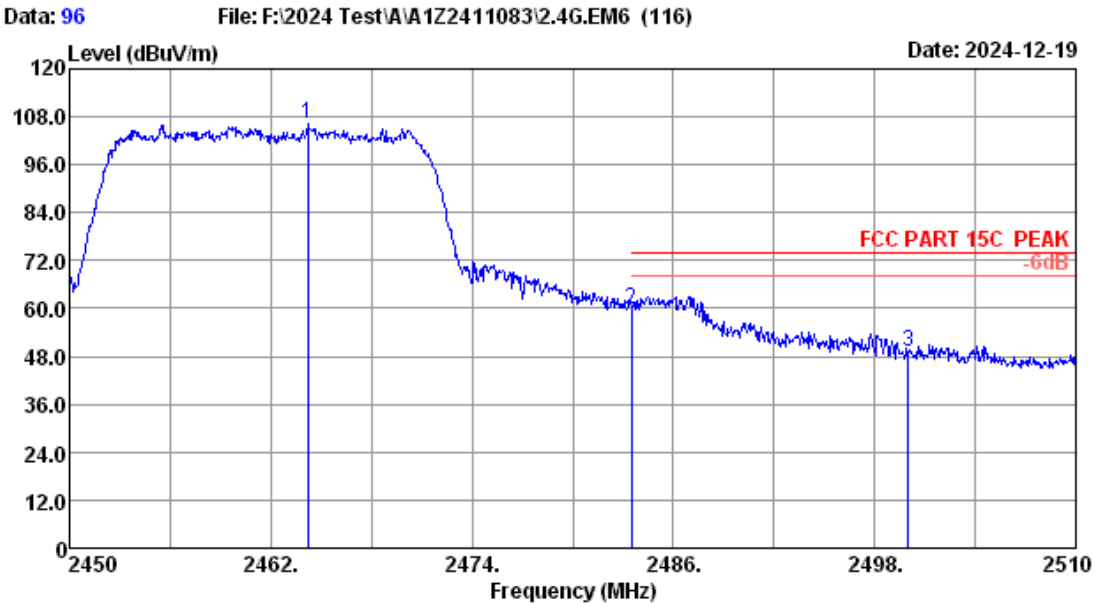

Site no. : 3m Chamber Data no. : 96
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax 2462 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2464.22	27.76	5.29	104.86	31.67	106.24	-----	-----	Peak
2	2483.50	27.83	5.31	58.20	31.66	59.68	74.00	14.32	Peak
3	2500.00	27.90	5.33	47.67	31.65	49.25	74.00	24.75	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

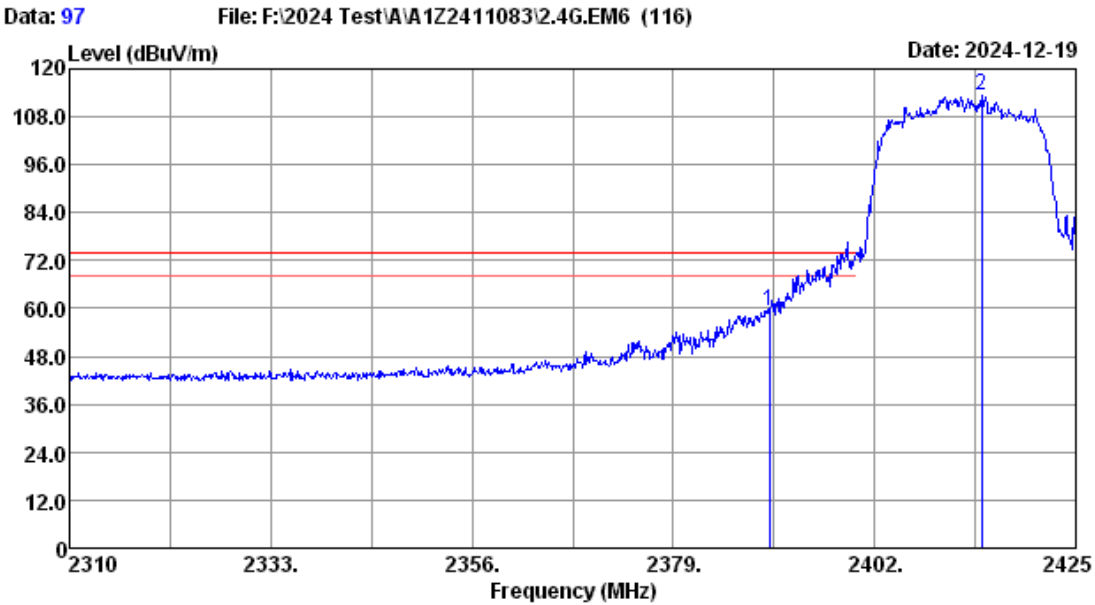

Site no. : 3m Chamber Data no. : 97
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax 2412 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	58.14	31.70	59.29	74.00	14.71	Peak
2	2414.19	27.70	5.23	112.12	31.69	113.36	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

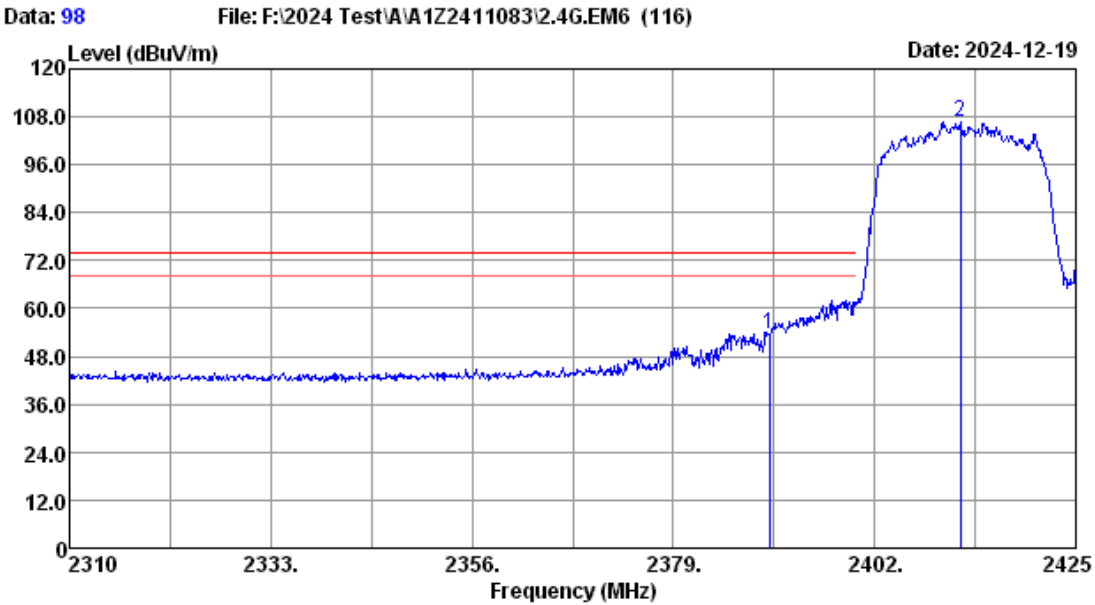

Site no. : 3m Chamber Data no. : 98
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.2°C/52.5% Engineer : Evan
Power rating :
Test Mode : 2.4G 11ax 2412 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	52.60	31.70	53.75	74.00	20.25	Peak
2	2411.78	27.70	5.23	105.65	31.69	106.89	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

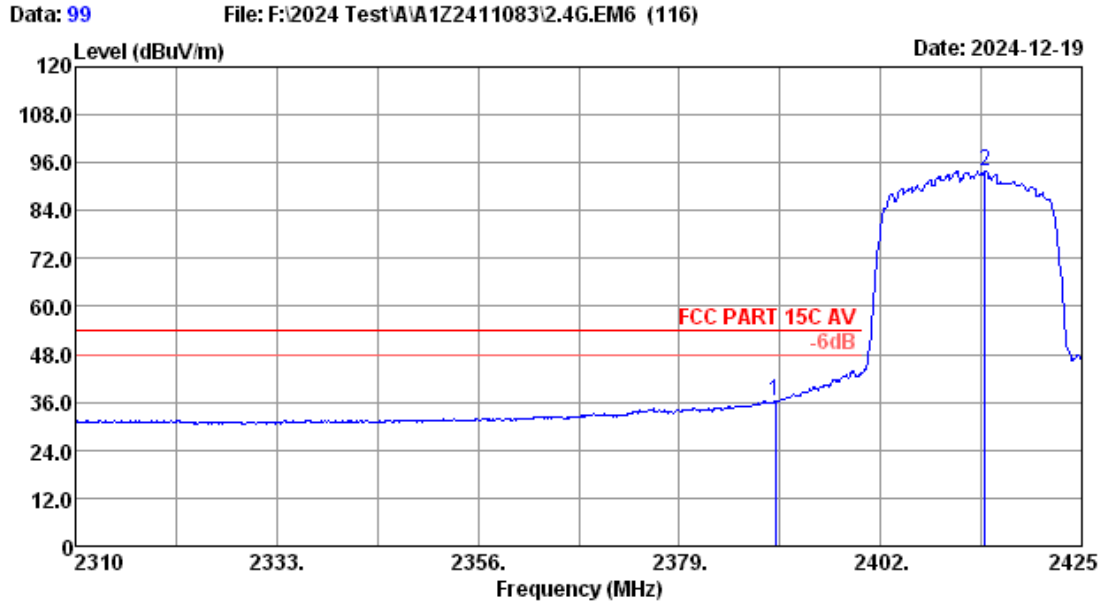

Site no. : 3m Chamber Data no. : 99
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax 2412 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	35.10	31.70	36.25	54.00	17.75	Average
2	2413.96	27.70	5.23	92.59	31.69	93.83	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

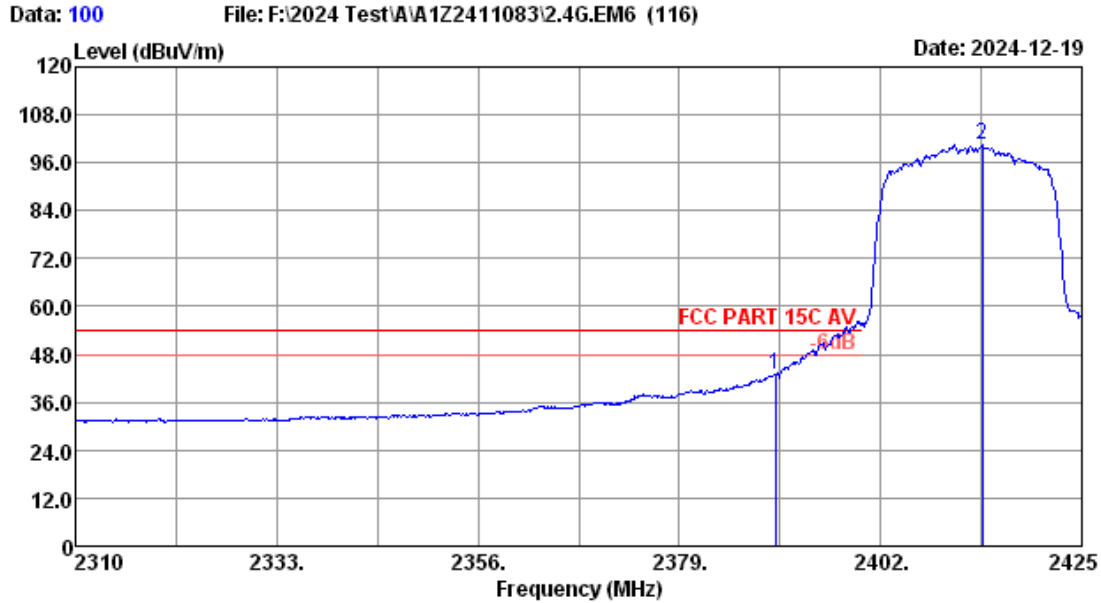

Site no. : 3m Chamber Data no. : 100
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax 2412 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	41.89	31.70	43.04	54.00	10.96	Average
2	2413.62	27.70	5.23	99.14	31.69	100.38	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

MIMO Mode 11n40

Data: 101

File: F:\2024 Test\A\A1Z2411083\2.4G.EM6 (116)


Date: 2024-12-19

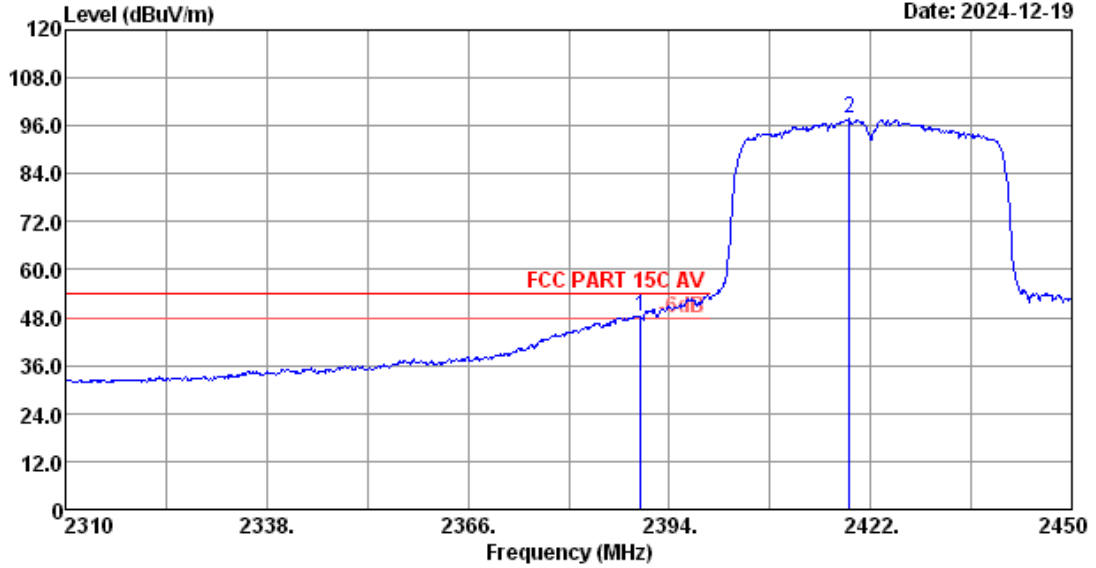

Site no. : 3m Chamber Data no. : 101
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n40 2422 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	47.28	31.70	48.43	54.00	5.57	Average
2	2419.06	27.70	5.25	96.62	31.69	97.88	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

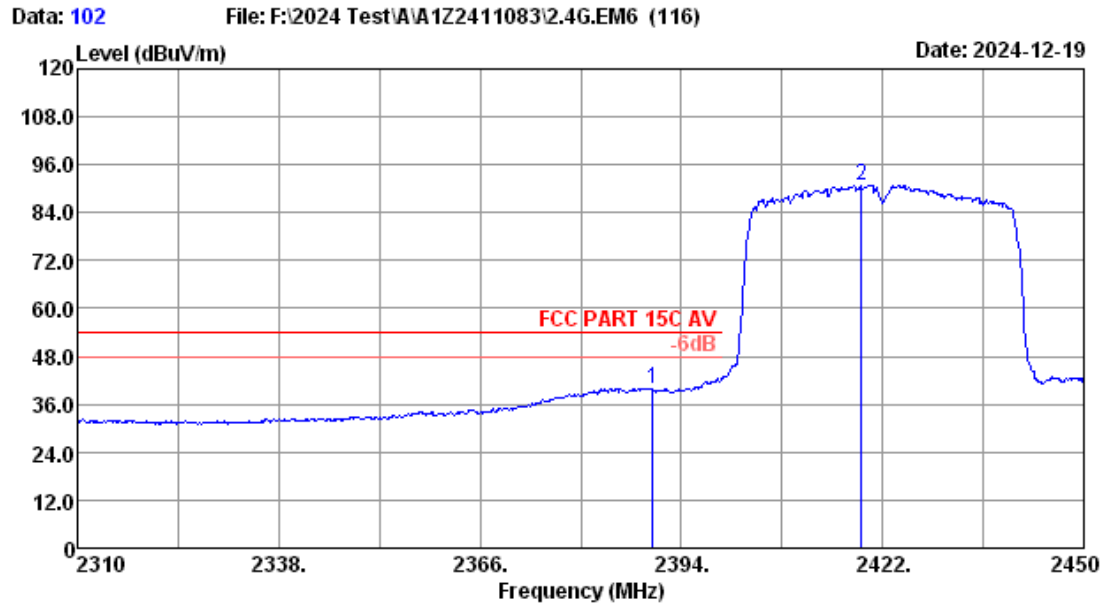

Site no. : 3m Chamber Data no. : 102
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n40 2422 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	38.79	31.70	39.94	54.00	14.06	Average
2	2419.06	27.70	5.25	89.68	31.69	90.94	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

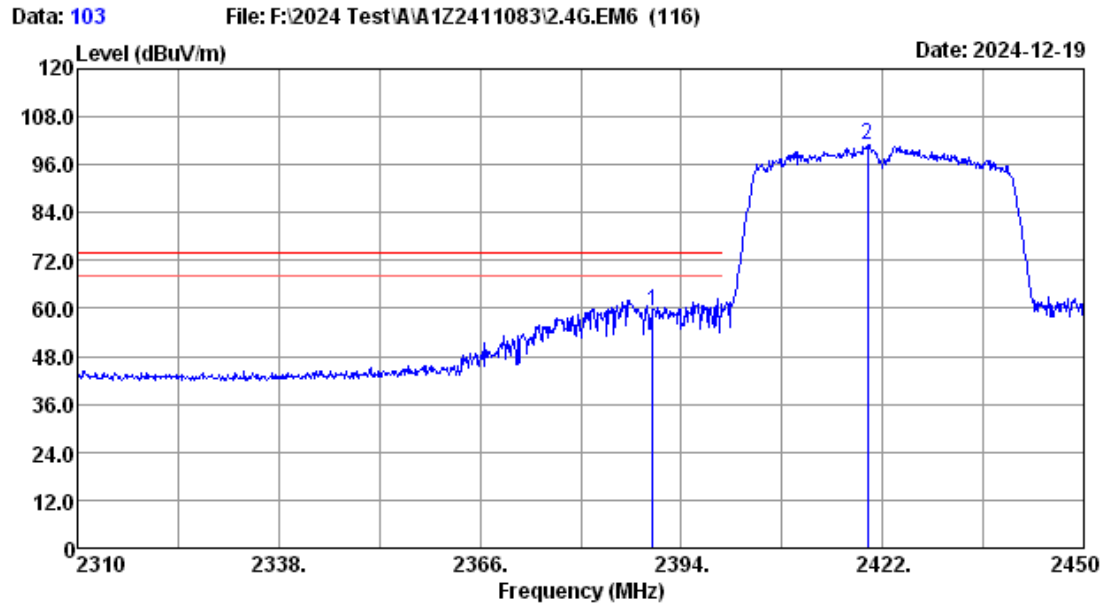

Site no. : 3m Chamber Data no. : 103
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n40 2422 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	58.28	31.70	59.43	74.00	14.57	Peak
2	2419.90	27.70	5.25	99.69	31.69	100.95	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

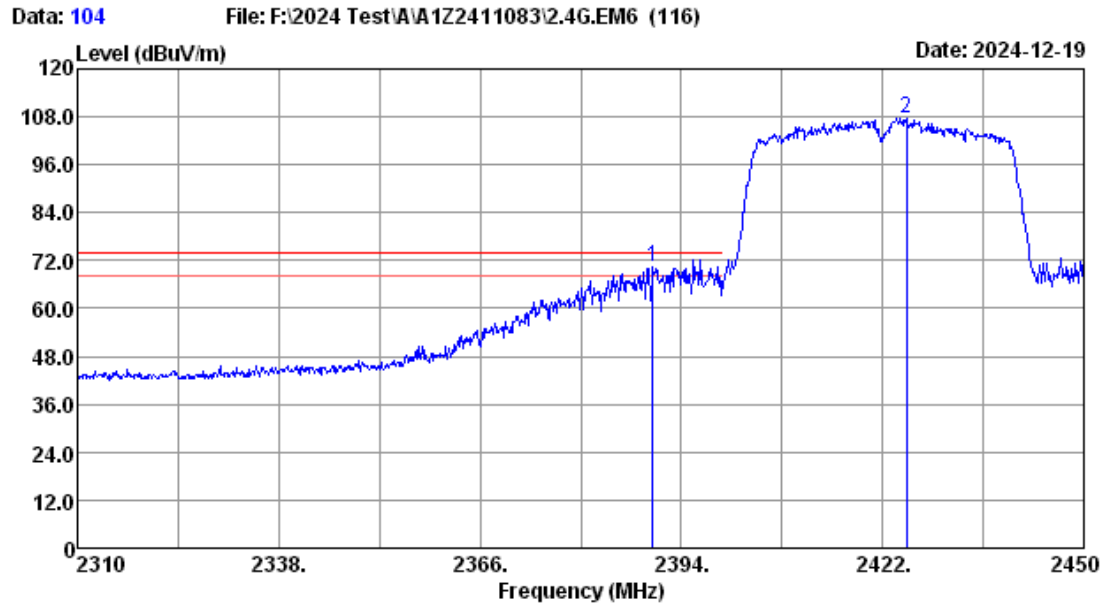

Site no. : 3m Chamber Data no. : 104
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n40 2422 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	69.26	31.70	70.41	74.00	3.59	Peak
2	2425.36	27.70	5.25	106.21	31.69	107.47	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

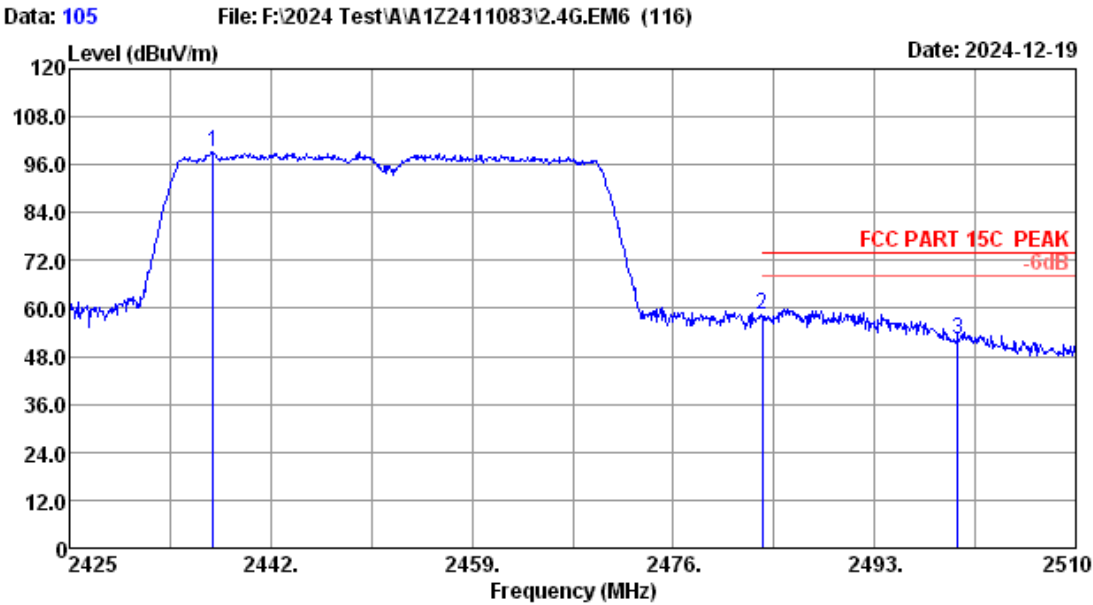

Site no. : 3m Chamber Data no. : 105
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n40 2452 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.16	27.70	5.25	97.84	31.68	99.11	-----	-----	Peak
2	2483.50	27.83	5.31	56.81	31.66	58.29	74.00	15.71	Peak
3	2500.00	27.90	5.33	50.47	31.65	52.05	74.00	21.95	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

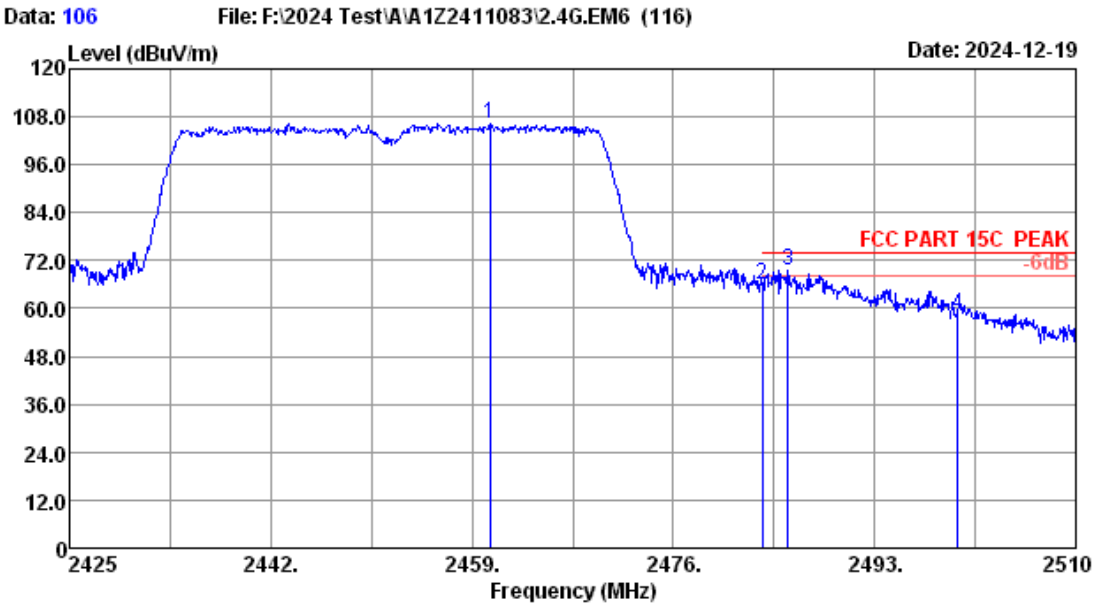

Site no. : 3m Chamber Data no. : 106
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n40 2452 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2460.53	27.74	5.29	104.89	31.67	106.25	-----	-----	Peak
2	2483.50	27.83	5.31	64.51	31.66	65.99	74.00	8.01	Peak
3	2485.69	27.84	5.31	68.23	31.66	69.72	74.00	4.28	Peak
4	2500.00	27.90	5.33	56.96	31.65	58.54	74.00	15.46	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

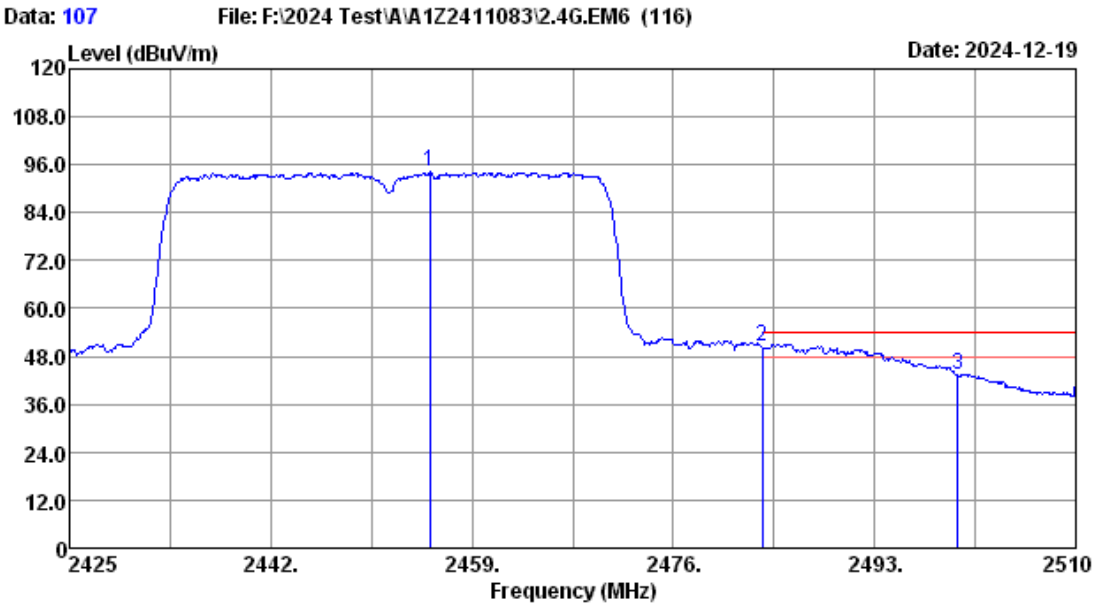

Site no. : 3m Chamber Data no. : 107
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n40 2452 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2455.43	27.72	5.27	92.78	31.67	94.10	-----	-----	Average
2	2483.50	27.83	5.31	48.78	31.66	50.26	54.00	3.74	Average
3	2500.00	27.90	5.33	41.64	31.65	43.22	54.00	10.78	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

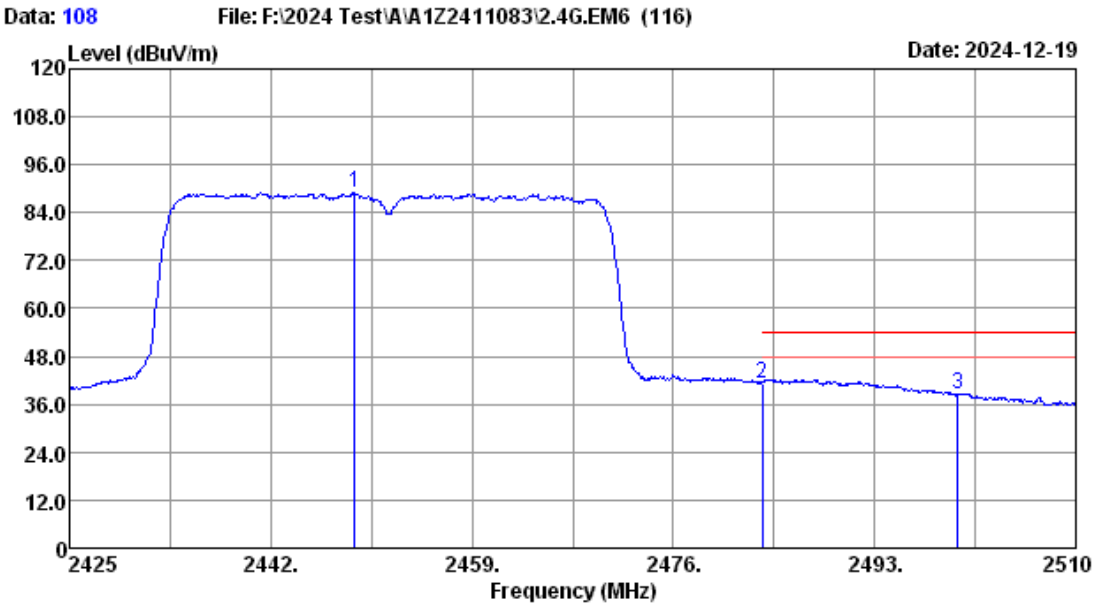

Site no. : 3m Chamber Data no. : 108
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11n40 2452 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2449.06	27.70	5.27	87.62	31.68	88.91	-----	-----	Average
2	2483.50	27.83	5.31	39.85	31.66	41.33	54.00	12.67	Average
3	2500.00	27.90	5.33	36.89	31.65	38.47	54.00	15.53	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

MIMO Mode 11ax 40

Data: 109

File: F:\2024 Test\A\A1Z2411083\2.4G.EM6 (116)


Date: 2024-12-19

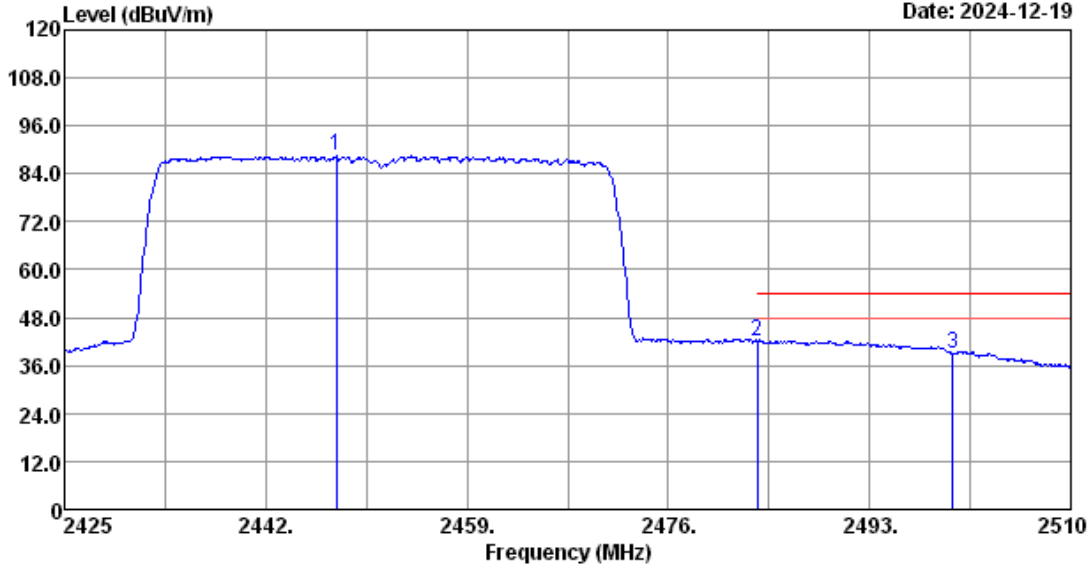

Site no. : 3m Chamber Data no. : 109
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax40 2452 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2447.95	27.70	5.27	87.14	31.68	88.43	-----	-----	Average
2	2483.50	27.83	5.31	40.75	31.66	42.23	54.00	11.77	Average
3	2500.00	27.90	5.33	37.27	31.65	38.85	54.00	15.15	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

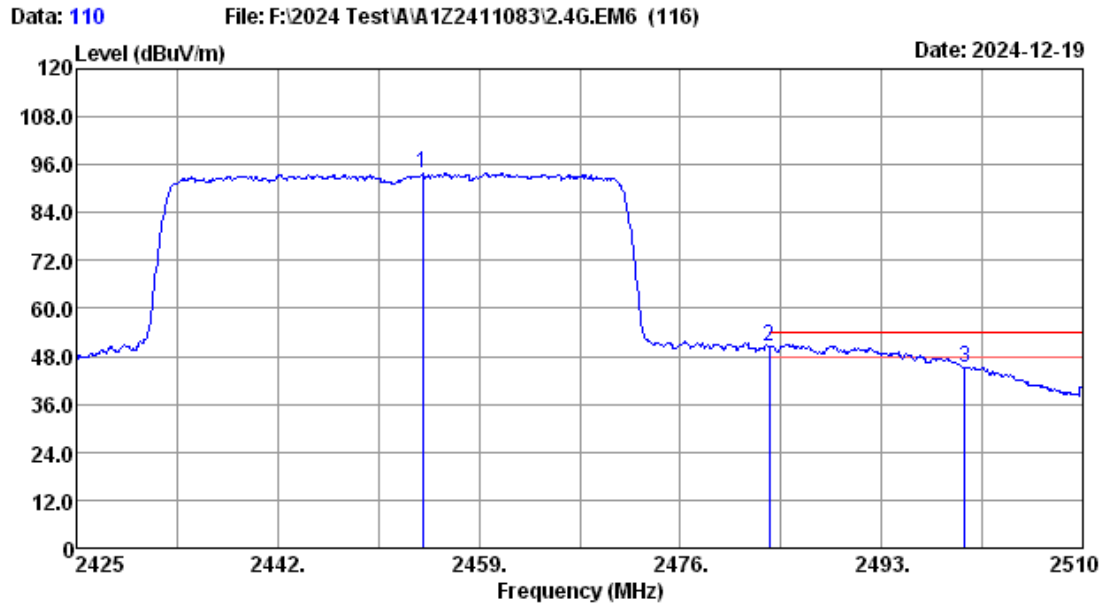

Site no. : 3m Chamber Data no. : 110
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax40 2452 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2454.24	27.72	5.27	92.47	31.67	93.79	-----	-----	Average
2	2483.50	27.83	5.31	48.91	31.66	50.39	54.00	3.61	Average
3	2500.00	27.90	5.33	43.44	31.65	45.02	54.00	8.98	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

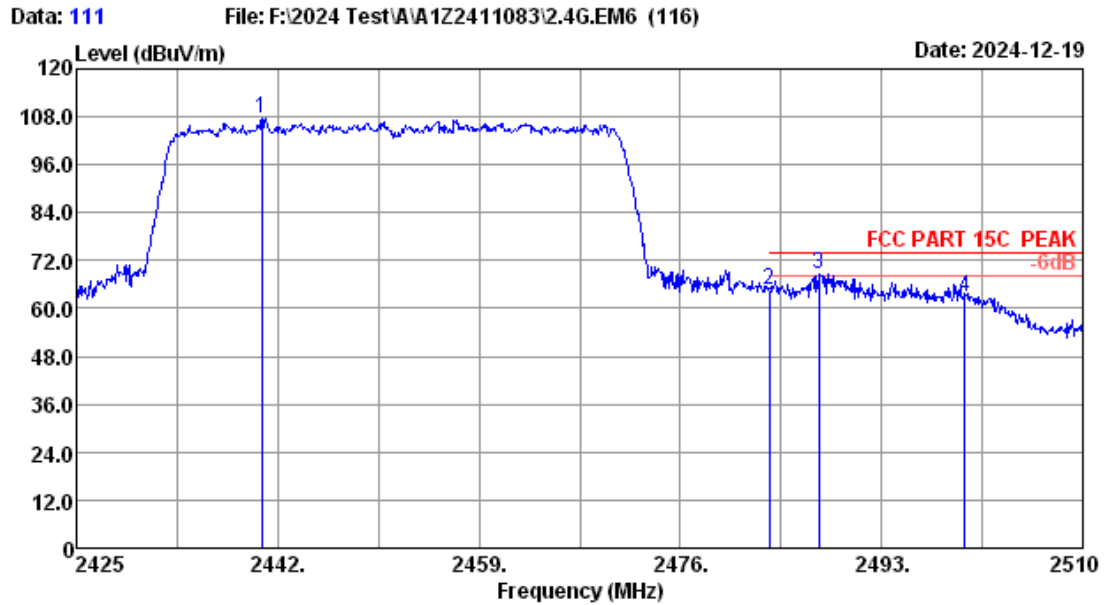

Site no. : 3m Chamber Data no. : 111
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax40 2452 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.64	27.70	5.27	106.13	31.68	107.42	-----	-----	Peak
2	2483.50	27.83	5.31	63.26	31.66	64.74	74.00	9.26	Peak
3	2487.73	27.85	5.31	67.19	31.66	68.69	74.00	5.31	Peak
4	2500.00	27.90	5.33	61.25	31.65	62.83	74.00	11.17	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

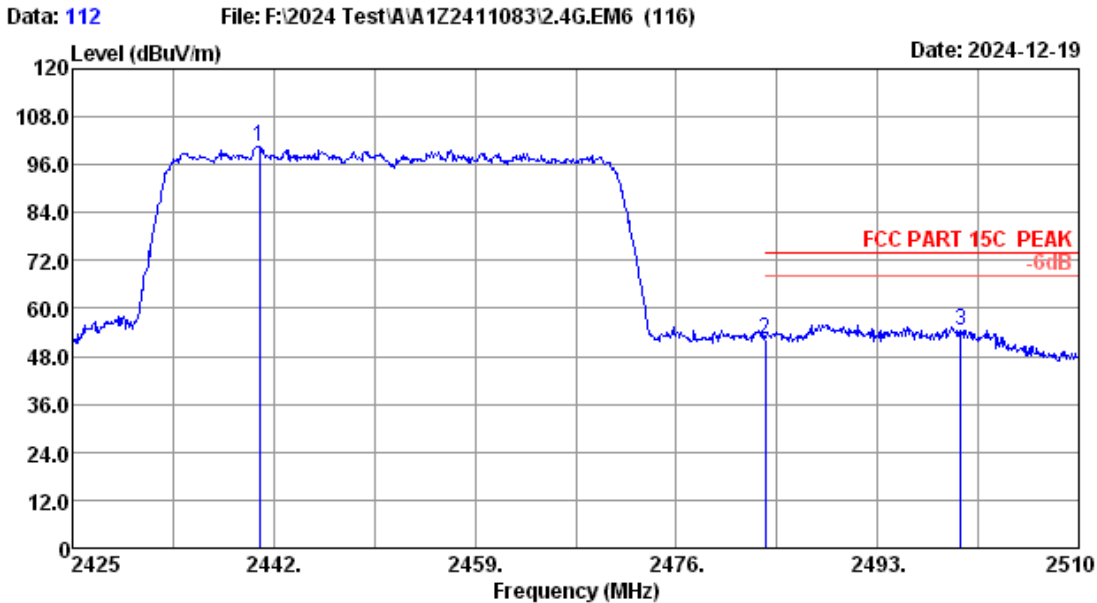

Site no. : 3m Chamber Data no. : 112
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax40 2452 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.81	27.70	5.27	99.38	31.68	100.67	-----	-----	Peak
2	2483.50	27.83	5.31	50.93	31.66	52.41	74.00	21.59	Peak
3	2500.00	27.90	5.33	52.87	31.65	54.45	74.00	19.55	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

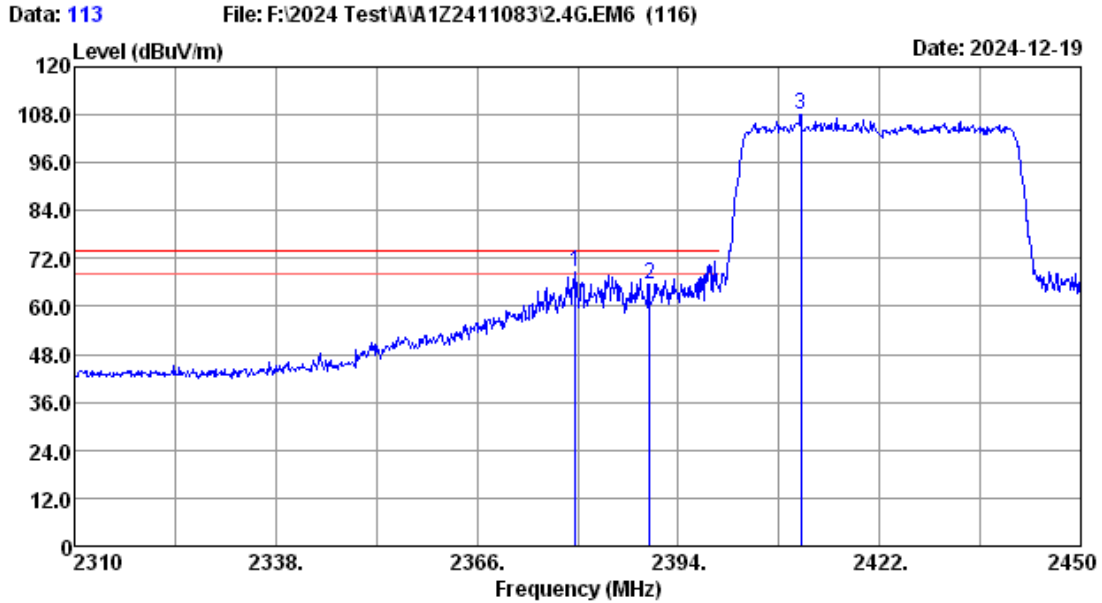

Site no. : 3m Chamber Data no. : 113
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax40 2422 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2379.72	27.58	5.21	67.42	31.71	68.50	74.00	5.50	Peak
2	2390.00	27.64	5.21	64.43	31.70	65.58	74.00	8.42	Peak
3	2411.08	27.70	5.23	106.94	31.69	108.18	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

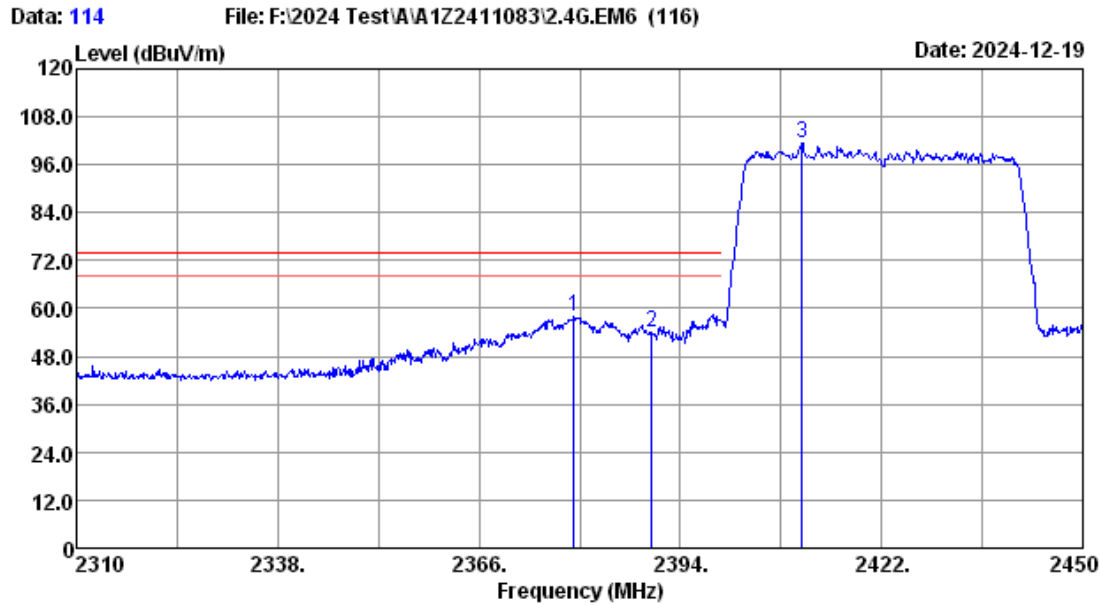

Site no. : 3m Chamber Data no. : 114
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax40 2422 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2379.16	27.57	5.21	56.75	31.71	57.82	74.00	16.18	Peak
2	2390.00	27.64	5.21	52.91	31.70	54.06	74.00	19.94	Peak
3	2410.94	27.70	5.23	100.32	31.69	101.56	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

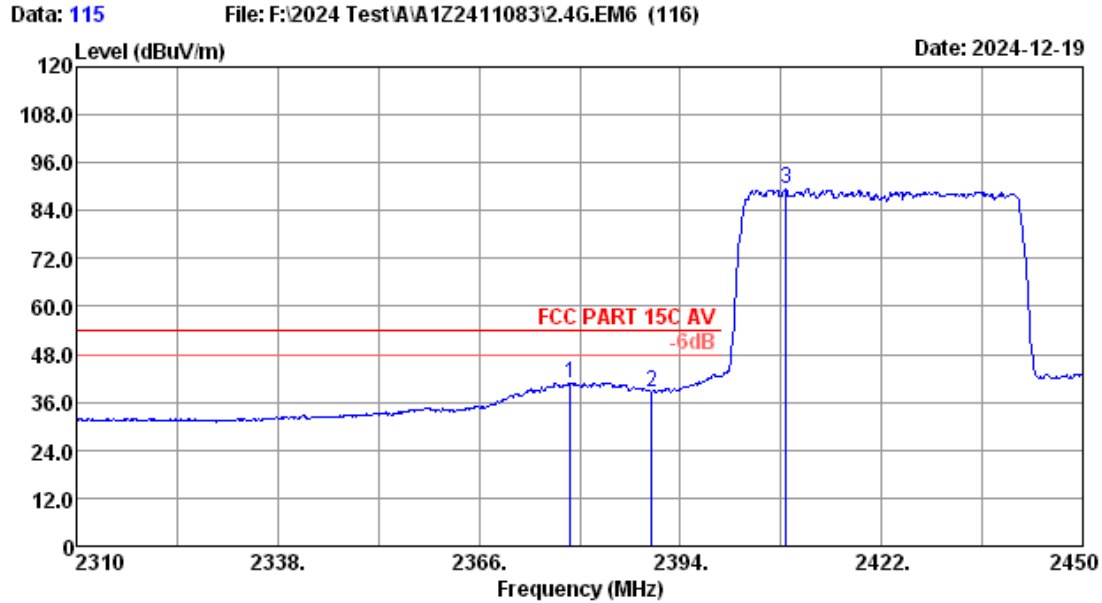

Site no. : 3m Chamber Data no. : 115
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax40 2422 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2378.74	27.57	5.21	39.85	31.71	40.92	54.00	13.08	Average
2	2390.00	27.64	5.21	37.44	31.70	38.59	54.00	15.41	Average
3	2408.70	27.70	5.23	88.26	31.70	89.49	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

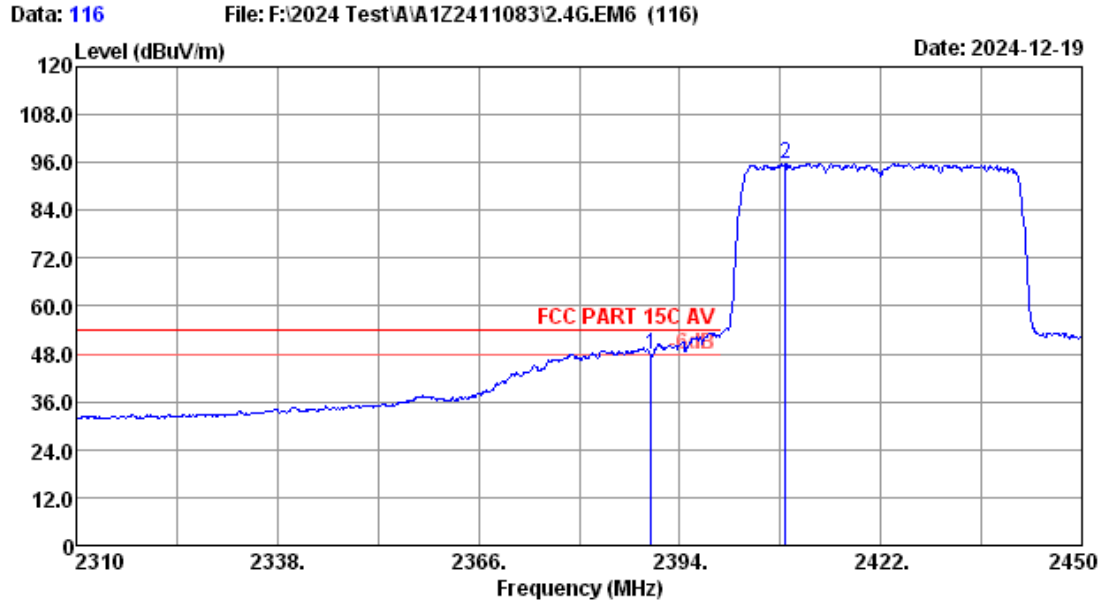

Site no. : 3m Chamber Data no. : 116
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : 2.4G 11ax40 2422 TX mode MIMO

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.21	46.86	31.70	48.01	54.00	5.99	Average
2	2408.70	27.70	5.23	94.54	31.70	95.77	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

7. 6dB & 99% Bandwidth Test

7.1.Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

7.2.Test Procedure

Use the test method described in ANSI C63.10 Section 11.8:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW $\geq 3 \times$ RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

Use the test method described in ANSI C63.10 Section 6.9.2:

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).


7.3.Test Results

EUT: Notebook Computer		
M/N: N24B4		
Test date: 2024-12-16~17	Pressure: 102.6±1.0 kpa	Humidity: 53.5±3.0%
Tested by: Evan	Test site: RF site	Temperature: 22.4±0.6℃


Test Mode	Frequency (MHz)	-6dB Bandwidth(MHz)		Limit (KHz)
		ANT0	ANT1	
11b	2412	10.180	11.110	≧ 500
	2437	10.180	10.180	
	2462	10.170	10.150	
11g	2412	16.320	15.120	≧ 500
	2437	16.350	16.370	
	2462	15.110	16.330	
11n HT20	2412	17.590	16.900	≧ 500
	2437	17.170	17.180	
	2462	17.410	17.100	
11n HT40	2412	35.080	33.820	≧ 500
	2437	36.220	36.210	
	2462	36.180	36.380	
11ax HE20	2412	15.010	11.370	≧ 500
	2437	18.450	18.620	
	2462	18.740	17.990	
11ax HE40	2412	35.080	37.950	≧ 500
	2437	37.750	36.640	
	2462	37.980	37.930	
Conclusion:Pass				

ANT0:


Test Mode: IEEE 802.11b
Test CH1: 2412MHz

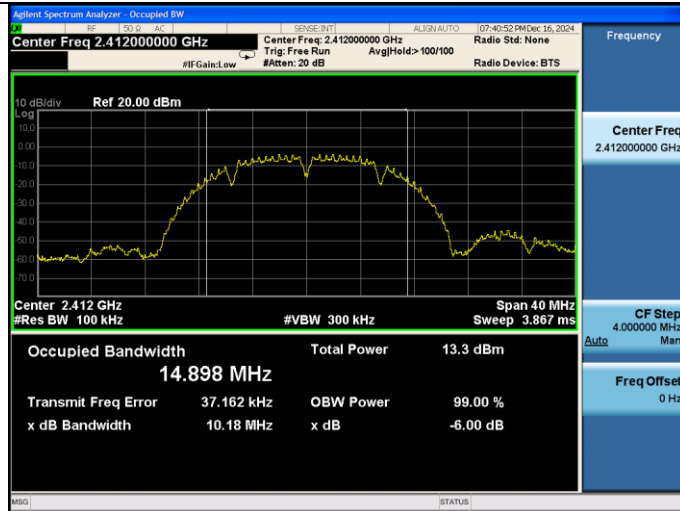


Test Mode: IEEE 802.11g
Test CH1: 2412MHz

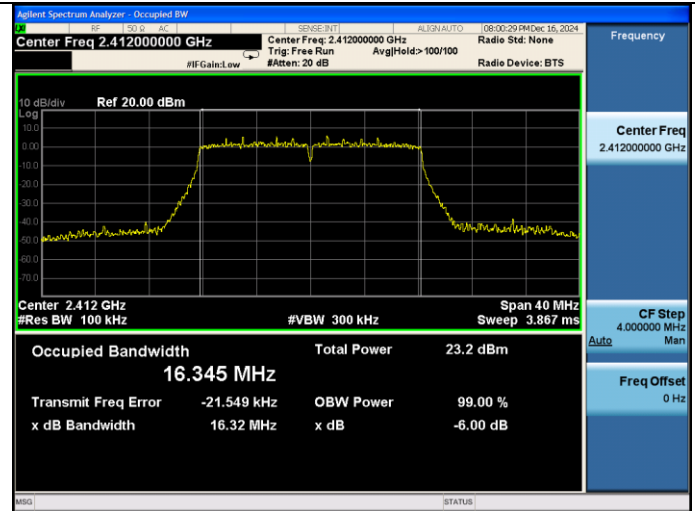


Test CH6: 2437MHz

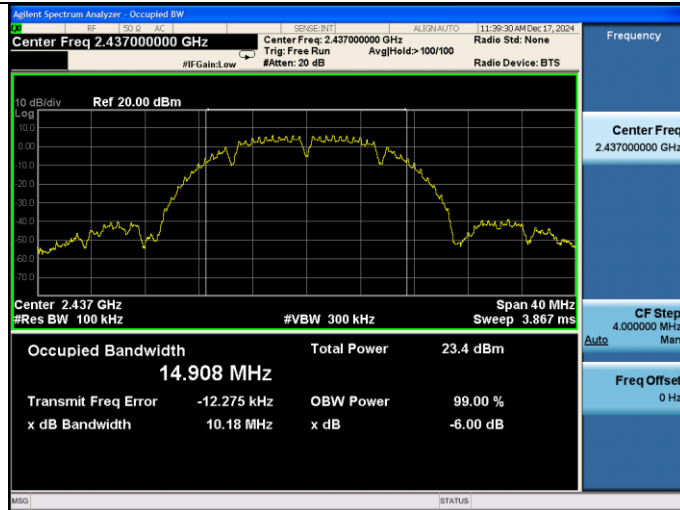


Test CH6: 2437MHz

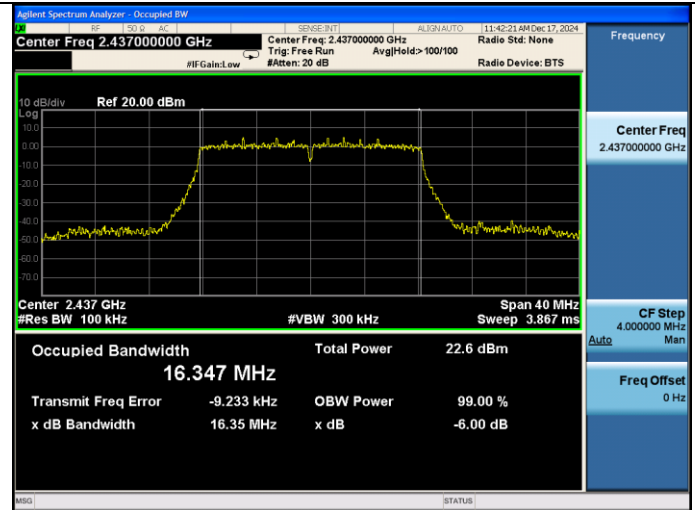


Test CH11: 2462MHz

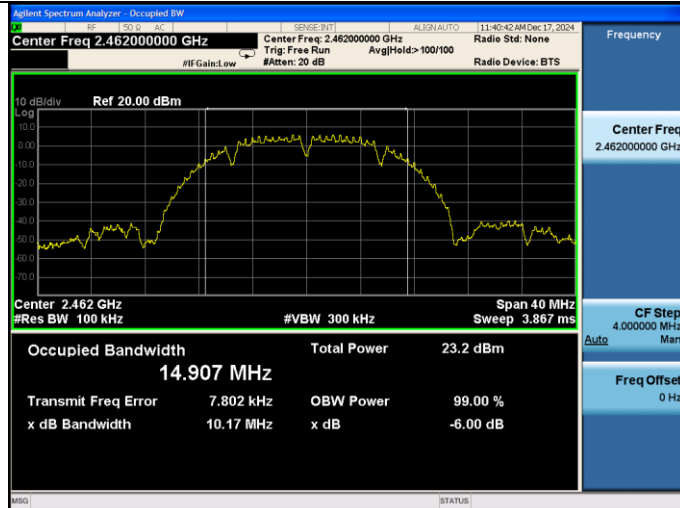


Test CH11: 2462MHz

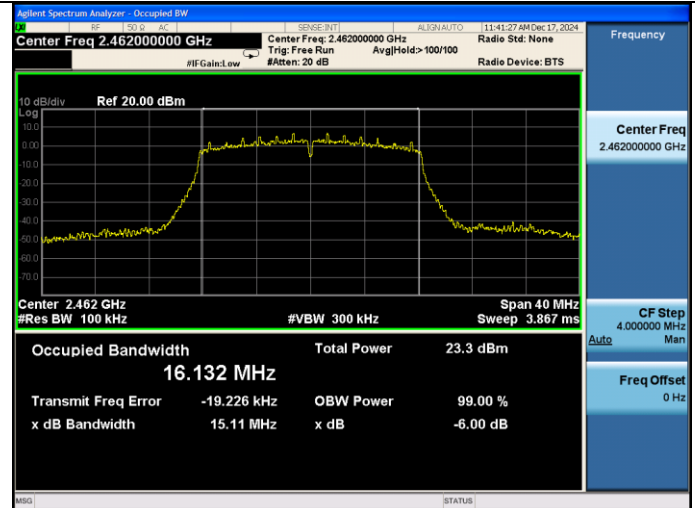


Test Mode: IEEE 802.11n HT20
Test CH1: 2412MHz

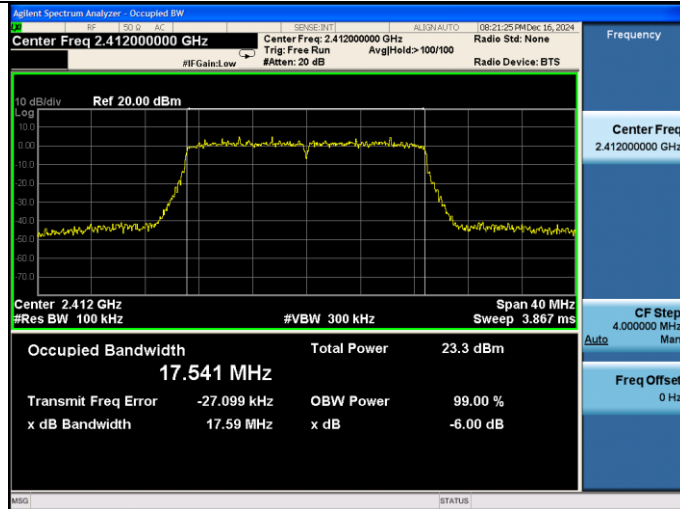


Test Mode: IEEE 802.11n HT40
Test CH1: 2422MHz

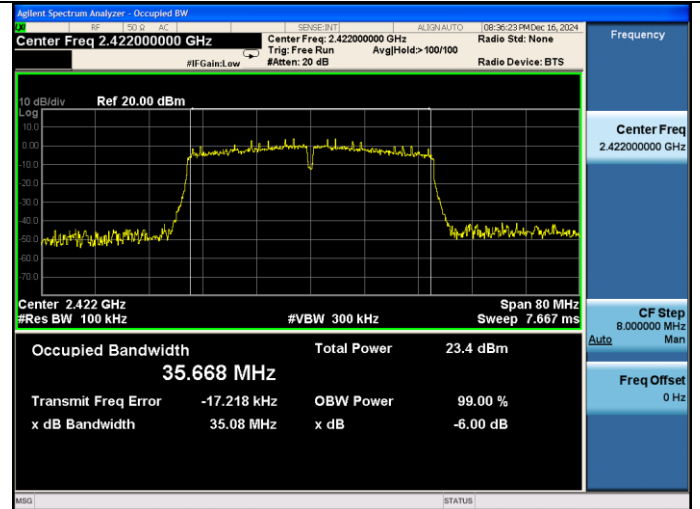


Test CH6: 2437MHz

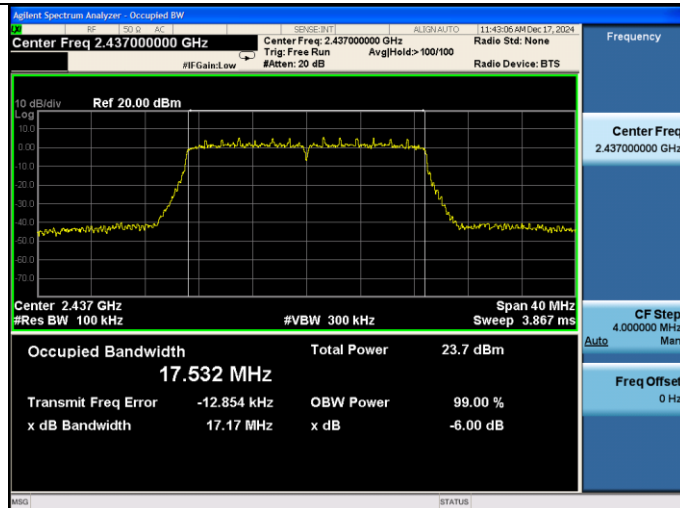


Test CH6: 2437MHz

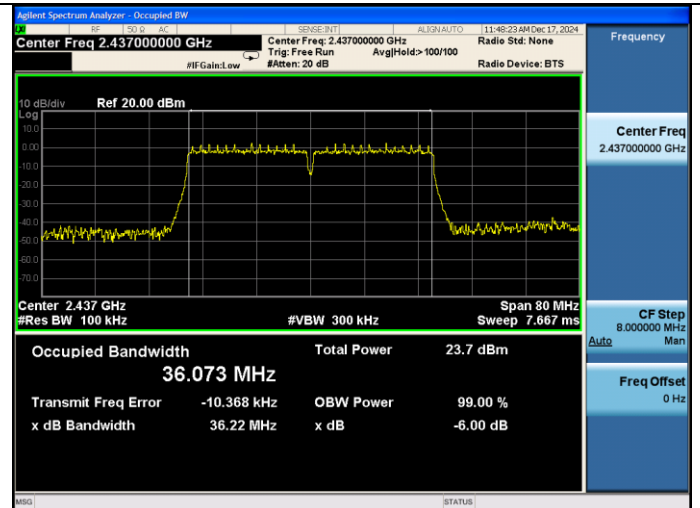


Test CH11: 2462MHz

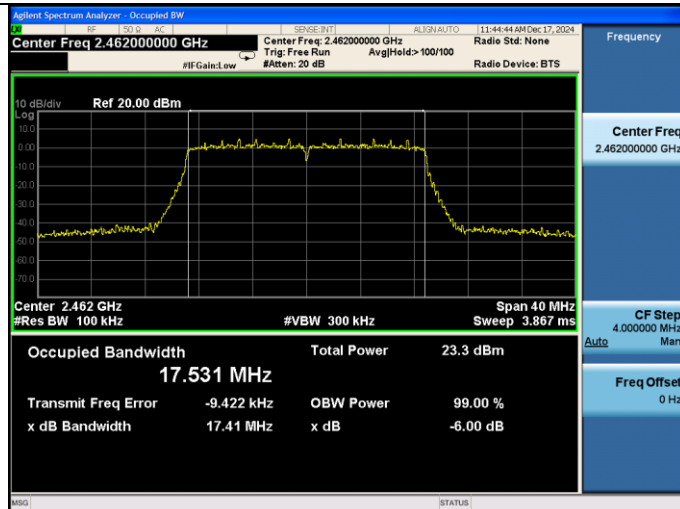


Test CH11: 2452MHz

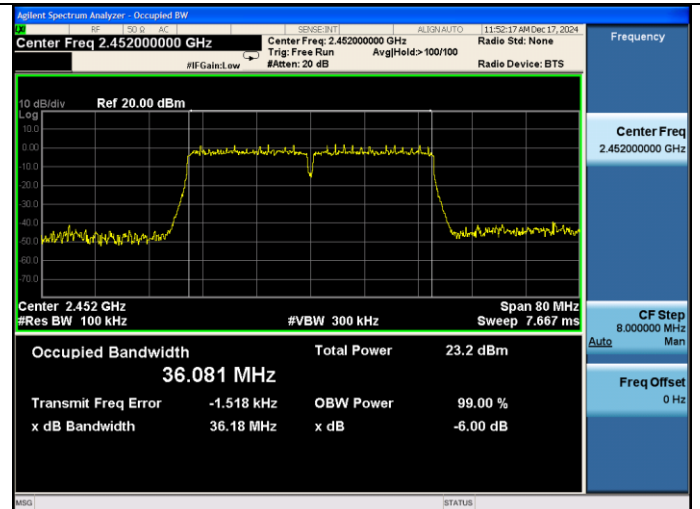


Test Mode: IEEE 802.11ax HE20
Test CH1: 2412MHz

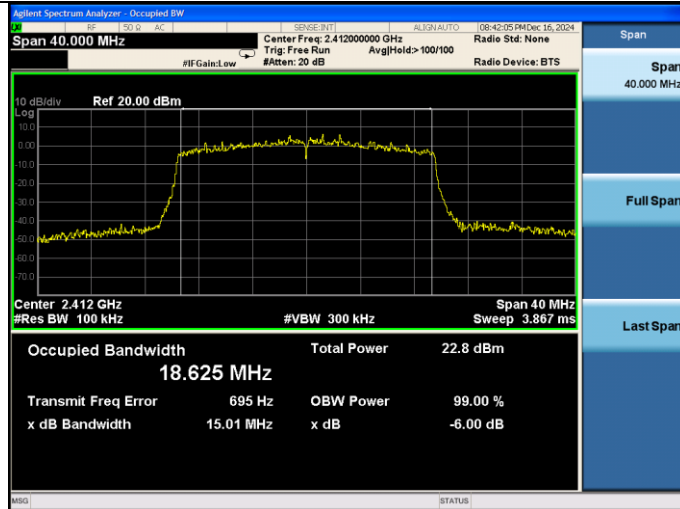


Test Mode: IEEE 802.11ax HE40
Test CH1: 2422MHz

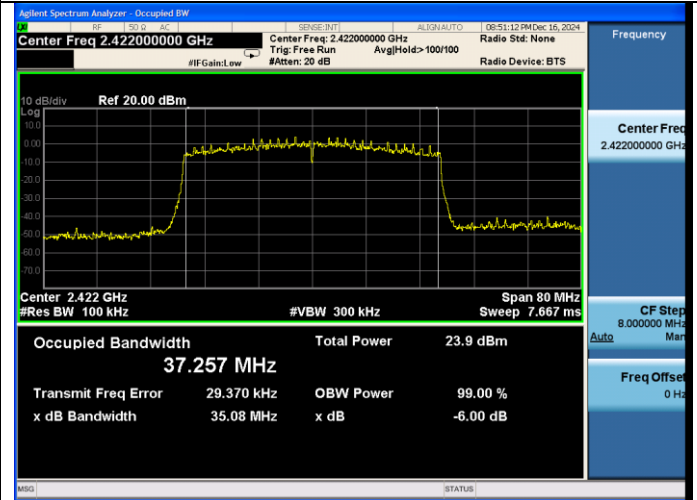


Test CH6: 2437MHz

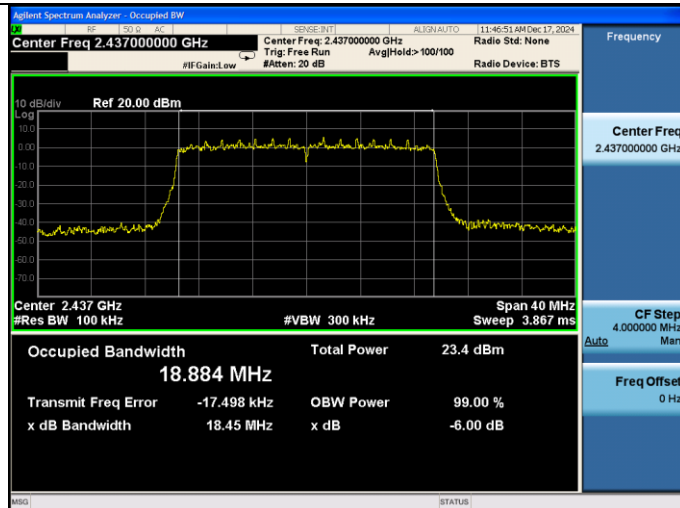


Test CH6: 2437MHz

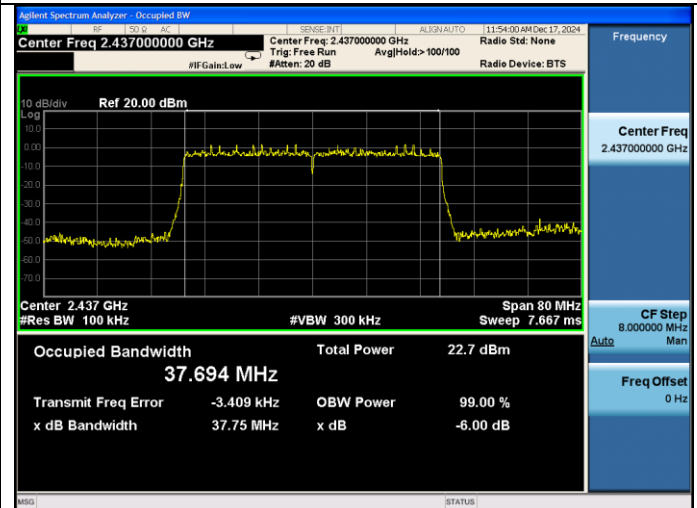

Test CH11: 2462MHz

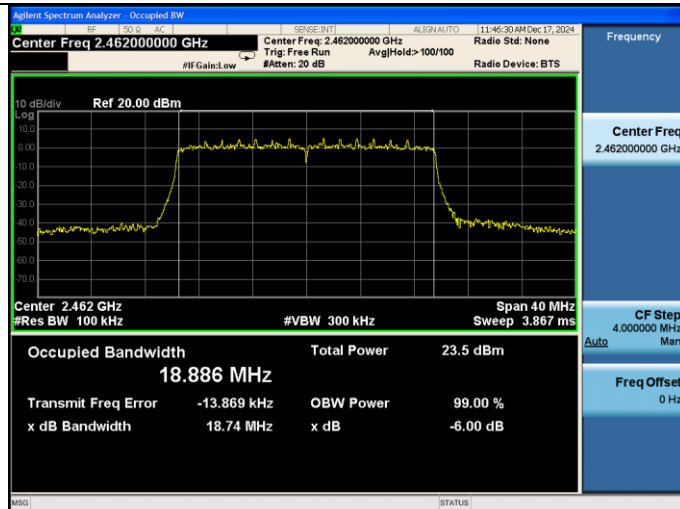


Test CH11: 2452MHz

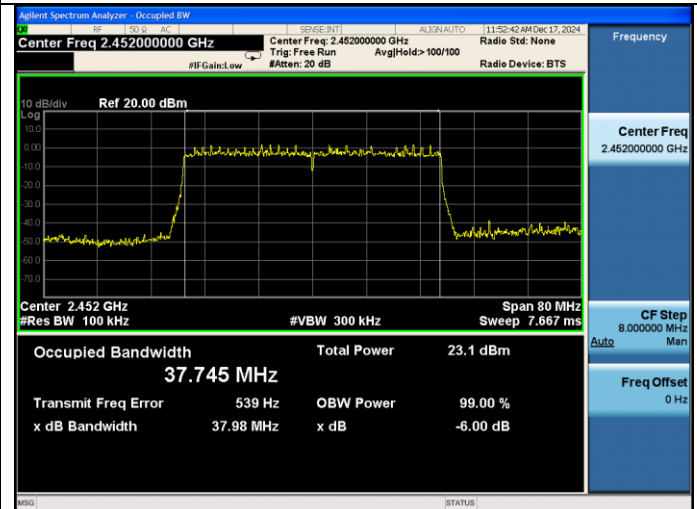


ANT1:


Test Mode: IEEE 802.11b
Test CH1: 2412MHz

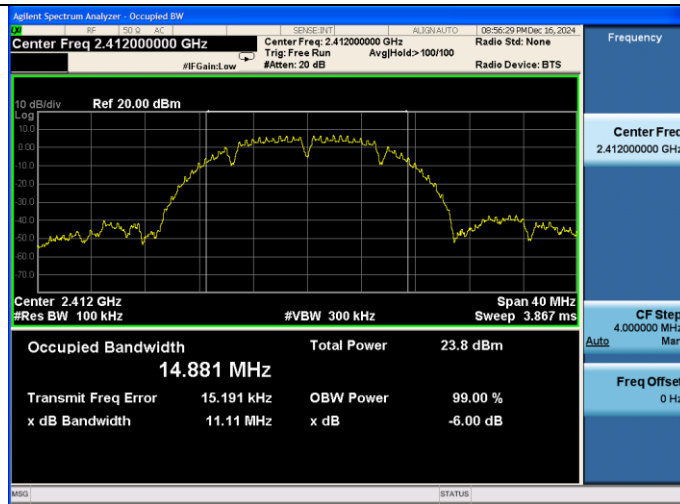


Test Mode: IEEE 802.11g
Test CH1: 2412MHz

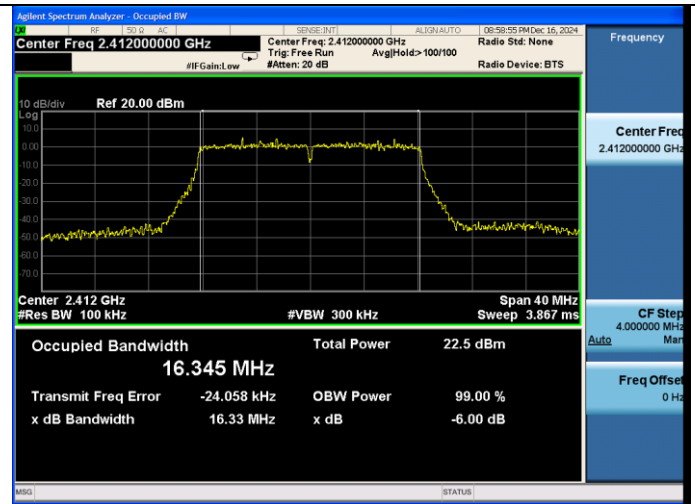


Test CH6: 2437MHz

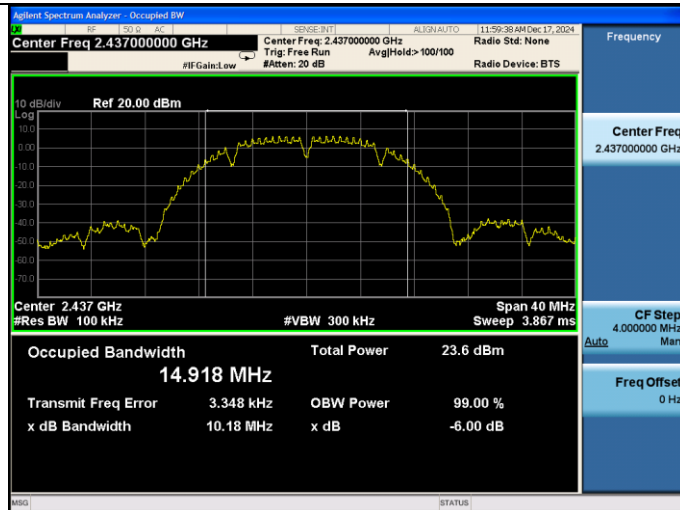


Test CH6: 2437MHz

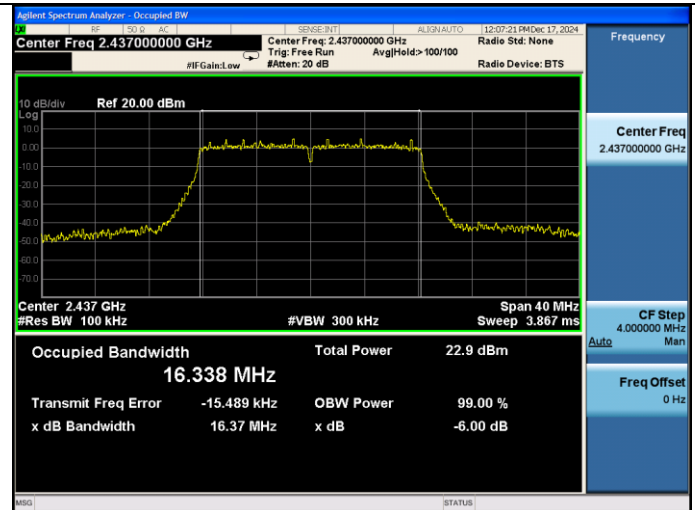


Test CH11: 2462MHz

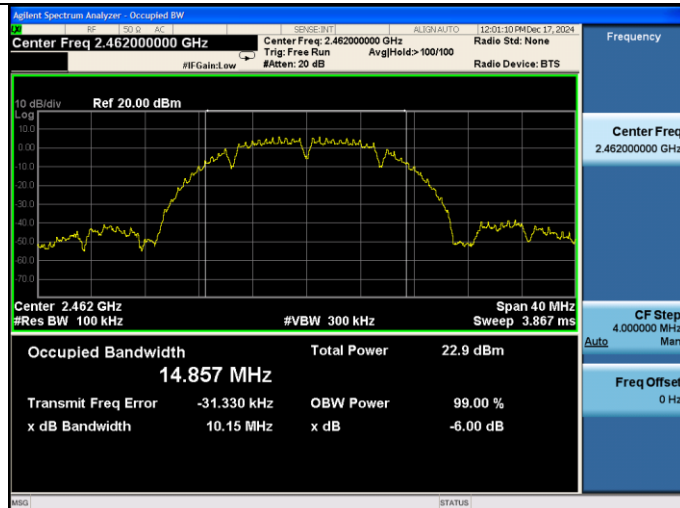


Test CH11: 2462MHz

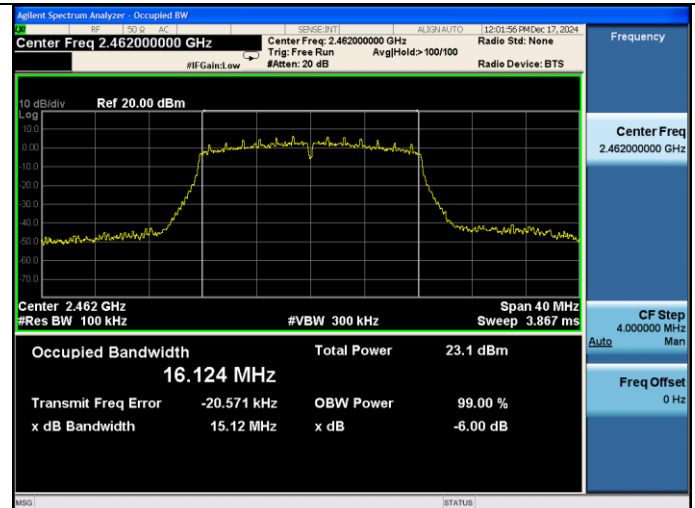


Test Mode: IEEE 802.11n HT20
Test CH1: 2412MHz

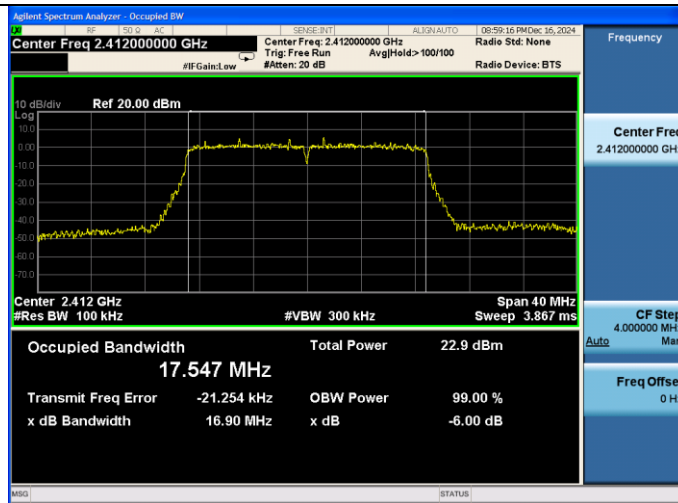


Test Mode: IEEE 802.11n HT40
Test CH1: 2412MHz

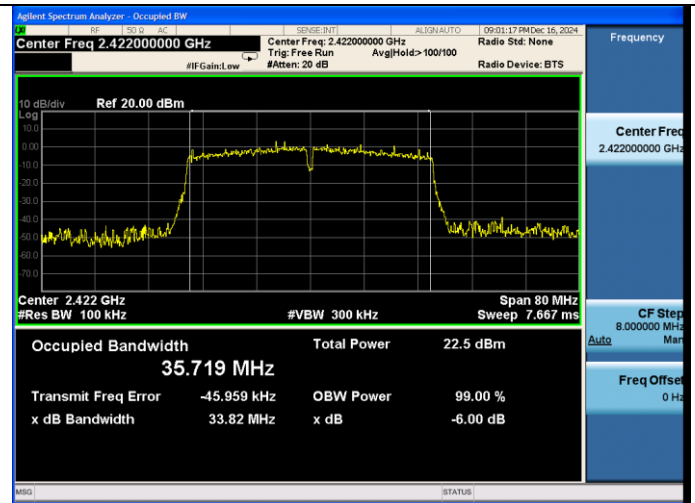


Test CH6: 2437MHz

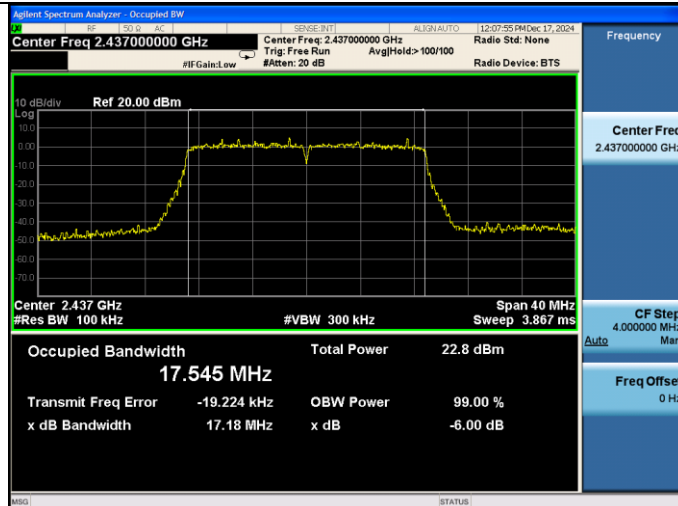


Test CH6: 2437MHz

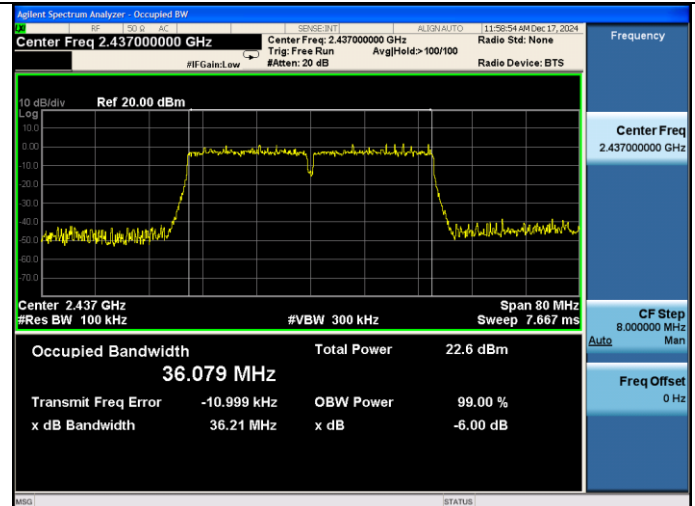


Test CH11: 2462MHz

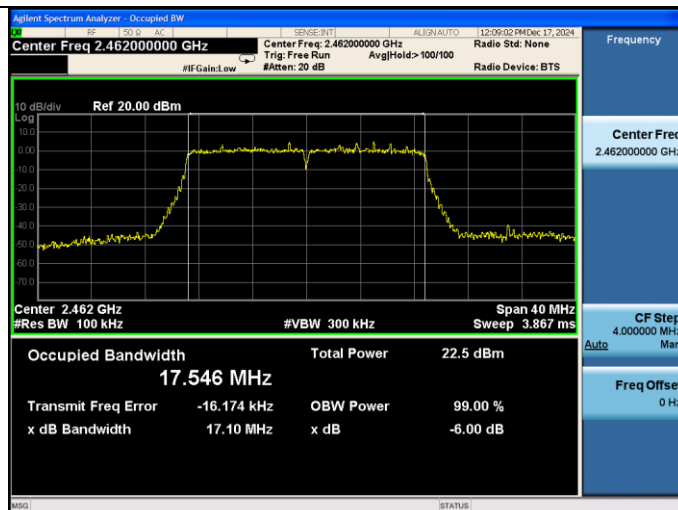


Test CH11: 2462MHz

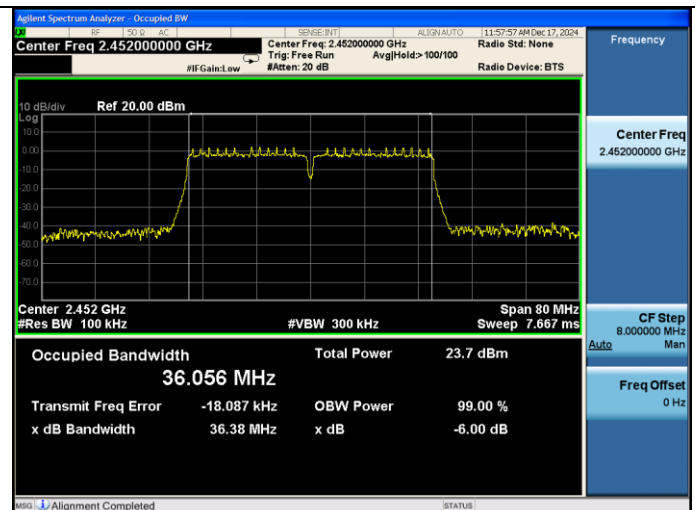


Test Mode: IEEE 802.11ax HE20
Test CH1: 2412MHz

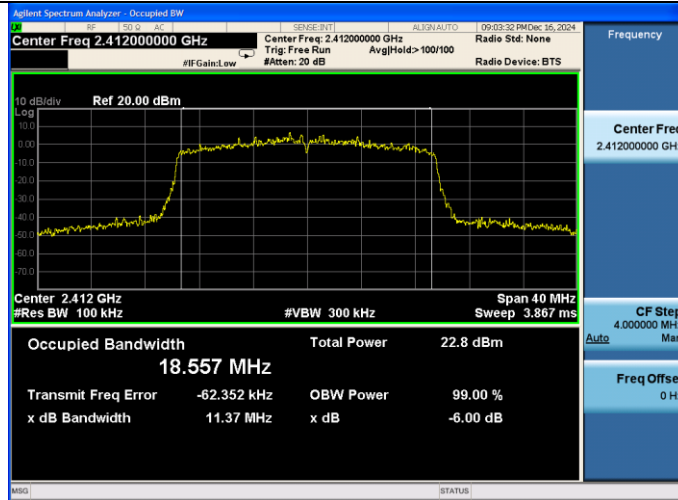


Test Mode: IEEE 802.11ax HE40
Test CH1: 2412MHz

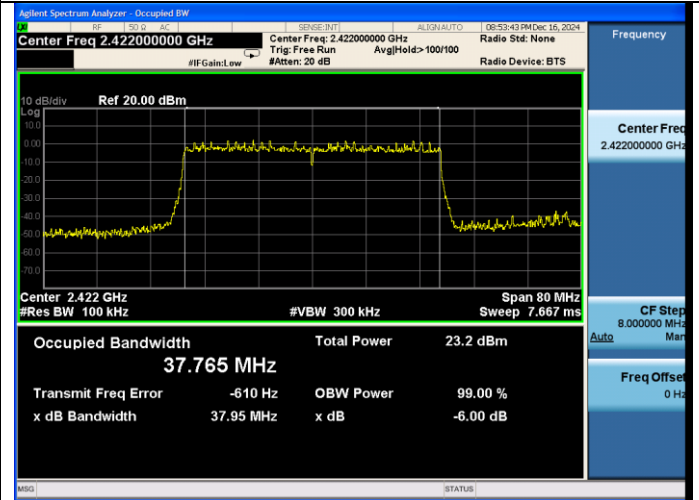


Test CH6: 2437MHz

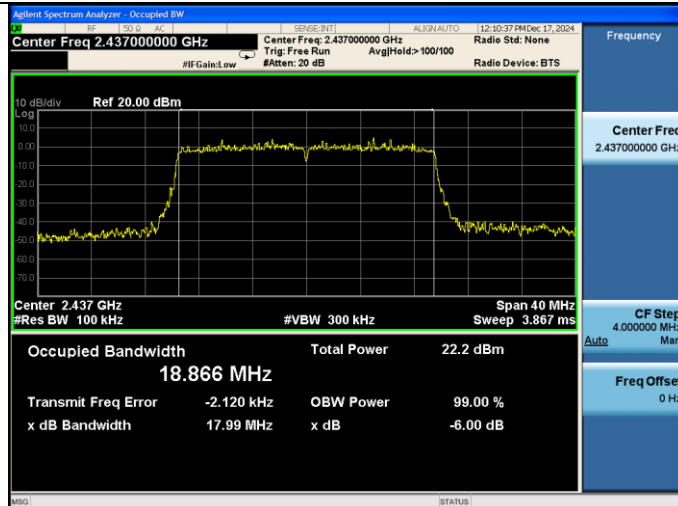


Test CH6: 2437MHz

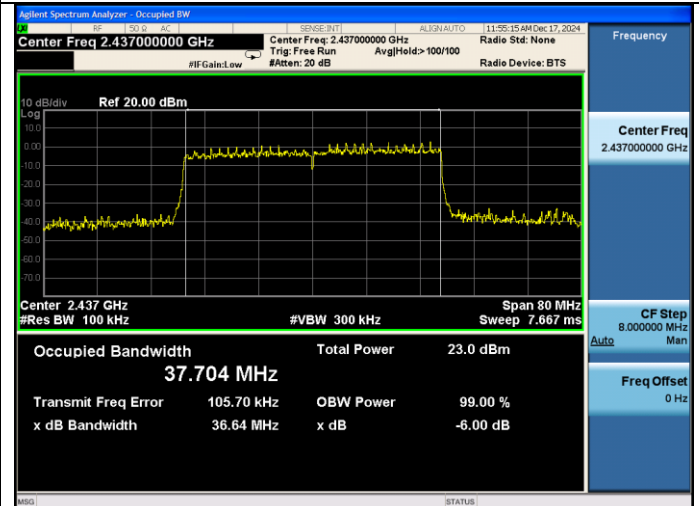

Test CH11: 2462MHz

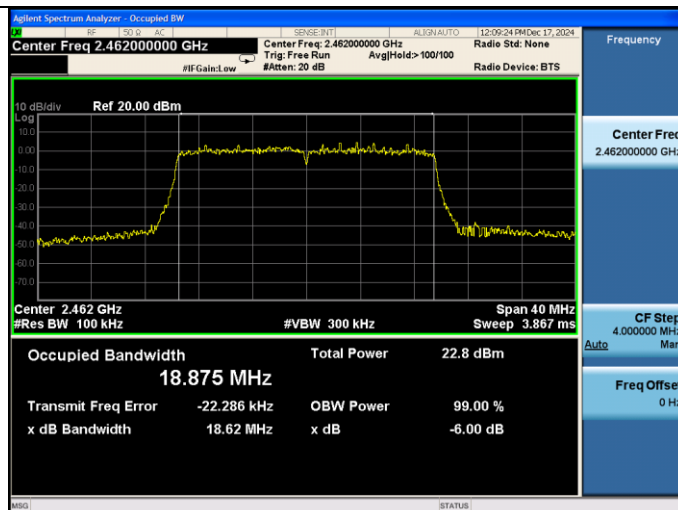

Test CH11: 2462MHz

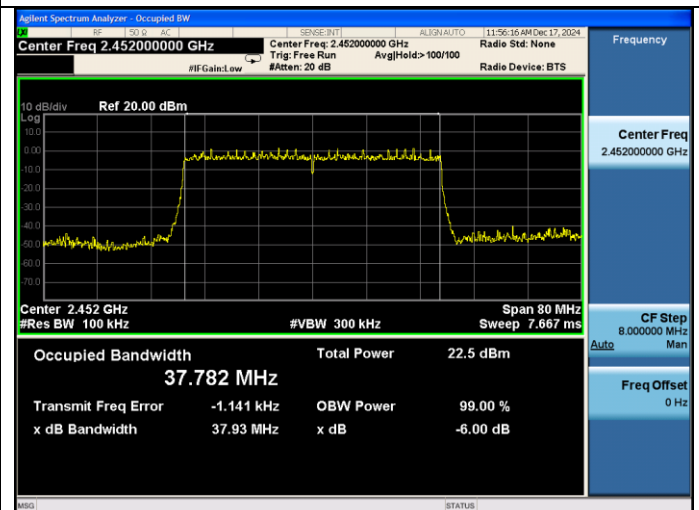


EUT: Notebook Computer		
M/N: N24B4		
Test date: 2024-12-16~17	Pressure: 102.5±1.0 kpa	Humidity: 53.6±3.0%
Tested by: Evan	Test site: RF site	Temperature: 22.4±0.6℃

Test Mode	Frequency (MHz)	99%Bandwidth(MHz)		Limit (MHz)
		ANT0	ANT1	
11b	2412	14.874	14.932	N/A
	2437	14.904	14.943	
	2462	14.916	14.884	
11g	2412	16.351	16.132	N/A
	2437	16.348	16.364	
	2462	16.134	16.137	
11n HT20	2412	17.512	17.518	N/A
	2437	17.532	17.578	
	2462	17.528	17.555	
11n HT40	2412	35.692	36.134	N/A
	2437	36.147	36.191	
	2462	36.137	36.170	
11ax HE20	2412	18.636	18.912	N/A
	2437	18.887	18.914	
	2462	18.910	18.936	
11ax HE40	2412	37.304	37.738	N/A
	2437	37.795	37.726	
	2462	37.746	37.819	


Conclusion:Pass

ANT0


Test Mode: IEEE 802.11b
Test CH1: 2412MHz

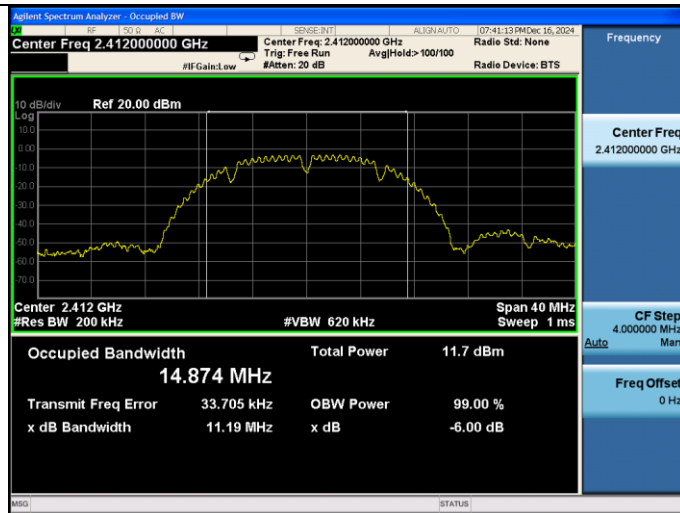


Test Mode: IEEE 802.11g
Test CH1: 2412MHz

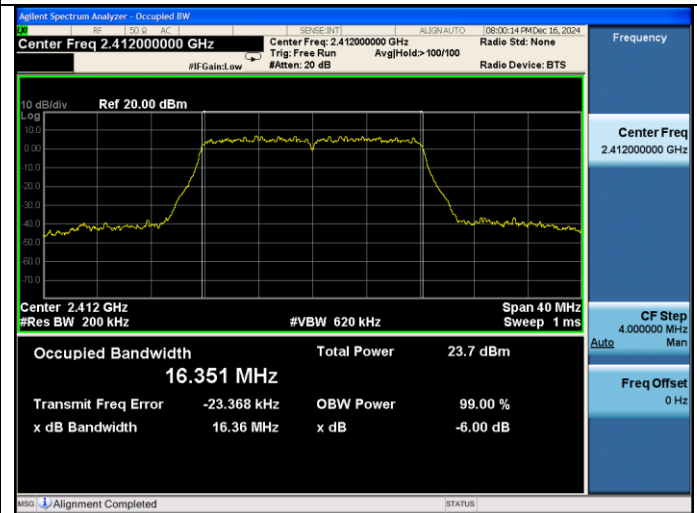


Test CH6: 2437MHz

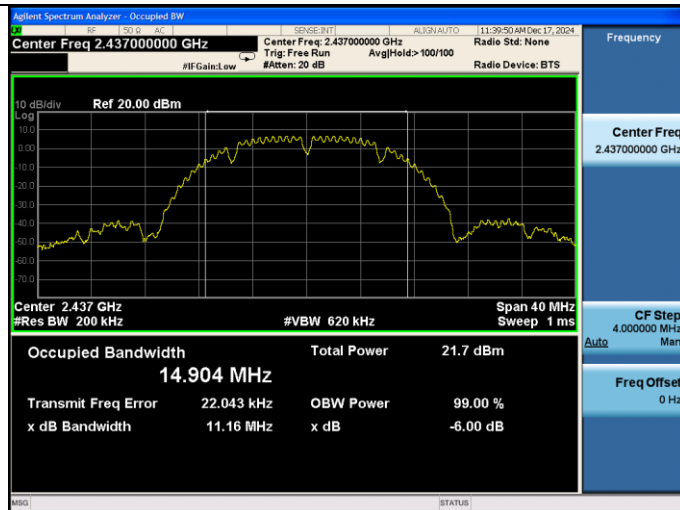

Test CH6: 2437MHz

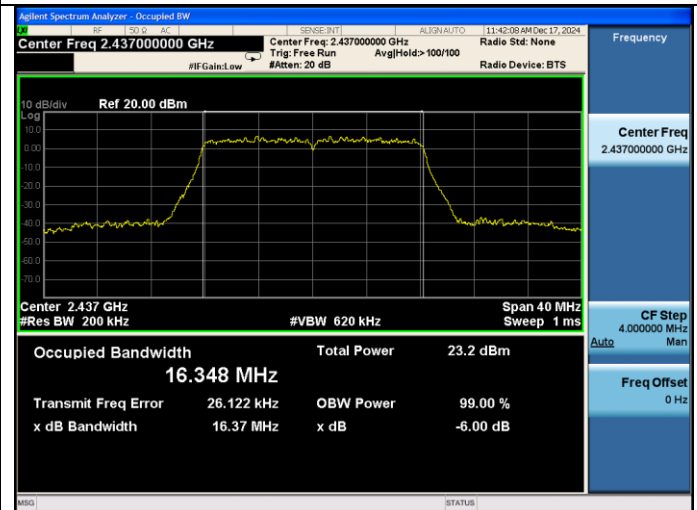

Test CH11: 2462MHz

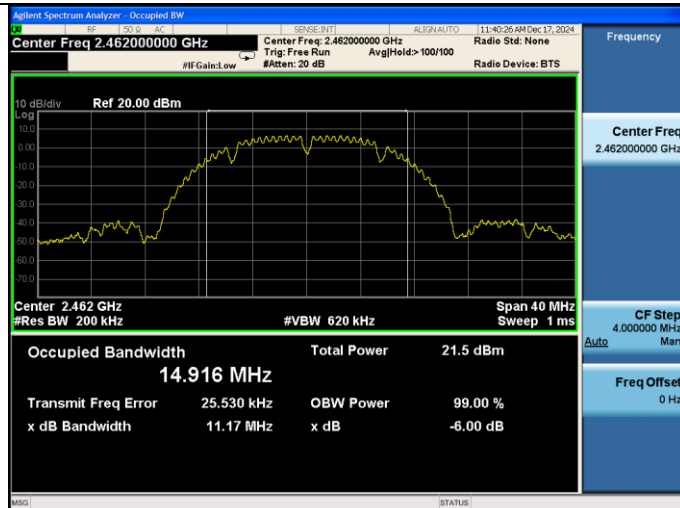

Test CH11: 2462MHz

