

9. DWELL TIME

9.1. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

9.2. Test Procedure

Use the test method described in ANSI C63.10 clause 7.8.4:

1. Connect the antenna of the EUT to Spectrum analyzer and let the EUT working at hopping mode.

2. Setting of SA is following as:

RBW: 100kHz / VBW: 300kHz

Sweep Mode: Single

Detect mode: Positive peak

Trace mode: Auto

Span: 0Hz

Sweep time: 5s and big enough to measure one hopping signal

3. Use below formula calculate the Dwell time

Dwell time=Hopping number per second*0.4*channel number*Pulse bandwidth per hopping.

9.3. Test Results



EUT: Notebook Computer			
M/N: N24G4			
Test date: 2025-03-06	Pressure: 102.3 ± 1.0 kpa	Humidity: $53.5 \pm 3.0\%$	
Tested by: Epoch	Test site: RF site	Temperature: 25.4 ± 0.6 °C	

Mode	dwell time		Limit	Conclusion
GFSK	DH1	51 hops/5s*0.4s*79channels* 0.433 ms =139.565ms	≤400ms	PASS
	DH3	24 hops/5s*0.4s*79channels* 1.680 ms =254.822ms	≤400ms	PASS
	DH5	20 hops/5s*0.4s*79channels* 2.925 ms =369.720ms	≤400ms	PASS
8-DPSK	3-DH1	48 hops/5s*0.4s*79channels* 0.431 ms =130.748ms	≤400ms	PASS
	3-DH3	28 hops/5s*0.4s*79channels* 1.689 ms =298.885ms	≤400ms	PASS
	3-DH5	12 hops/5s*0.4s*79channels* 2.935 ms =222.590ms	≤400ms	PASS



Note: All the lower levels were signaled from receiver and should not be considered in here.

GFSK



DH 1

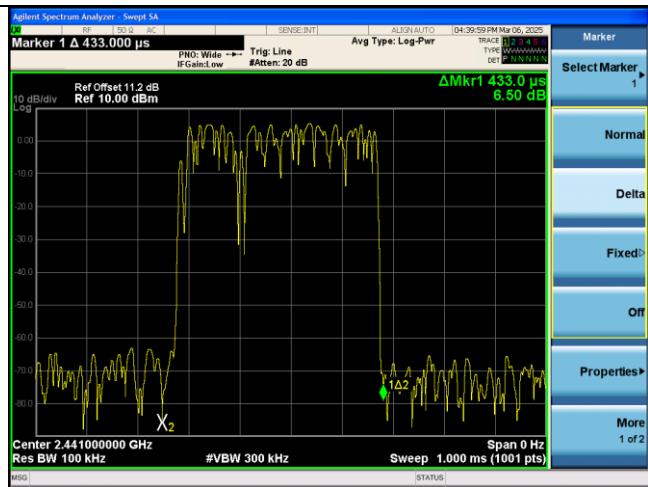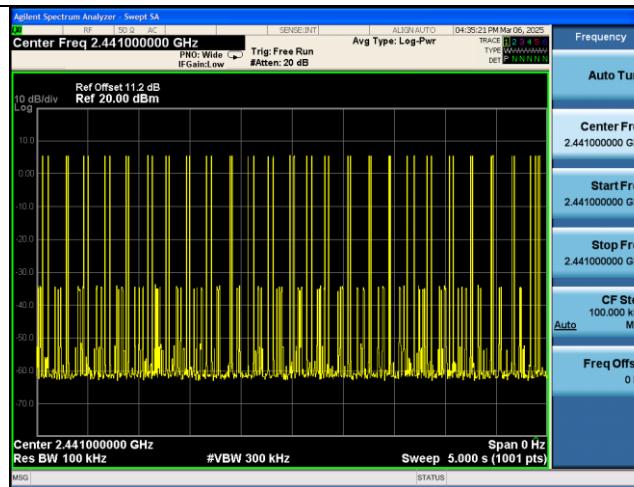

DH 3

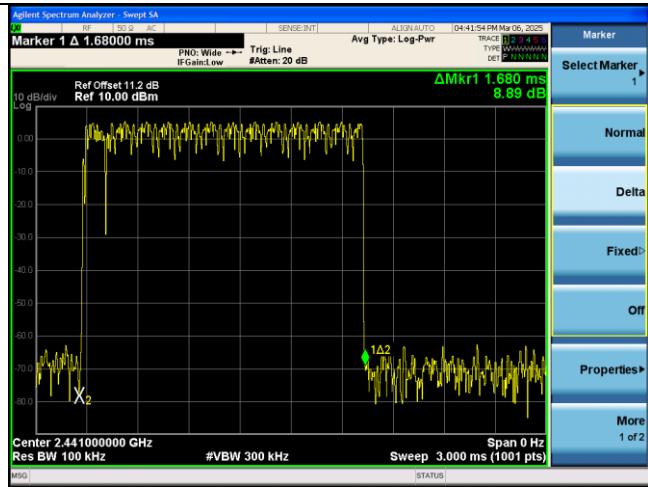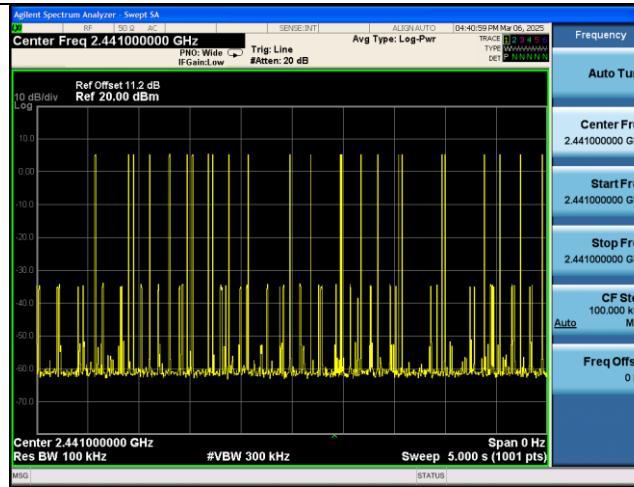


DH 5

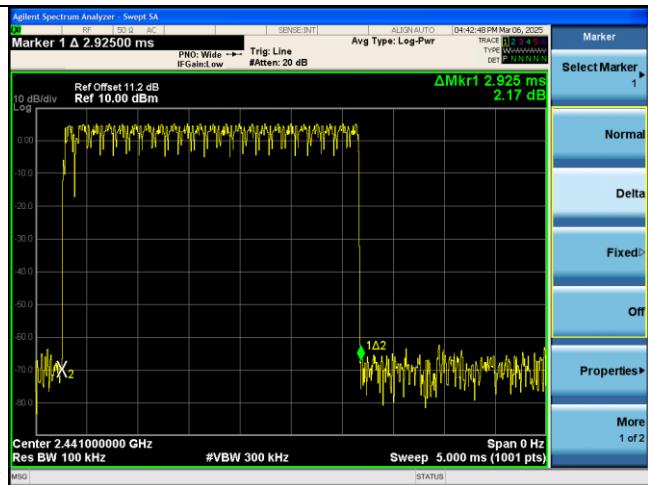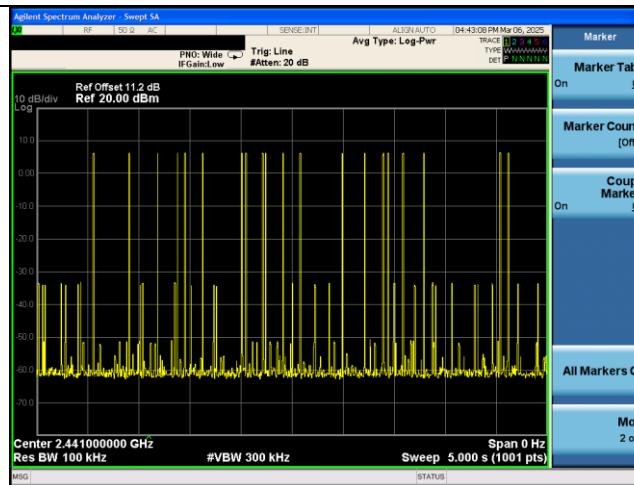


8-DPSK



3DH 1

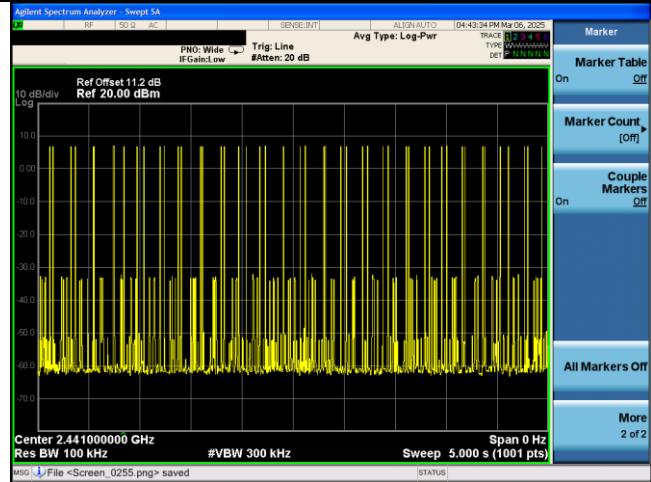

3DH 3

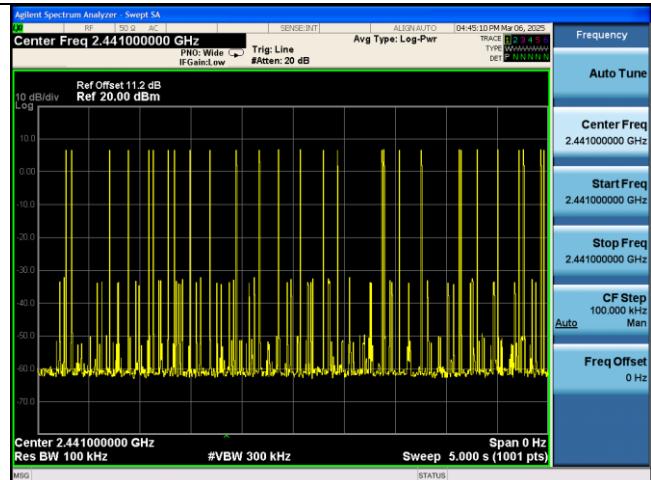

3DH 5

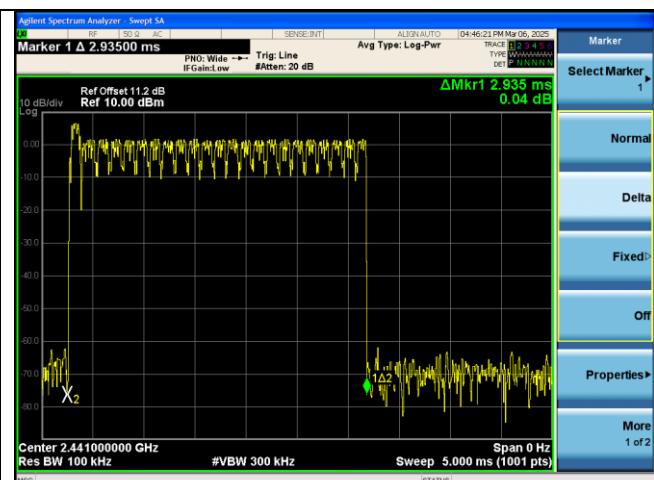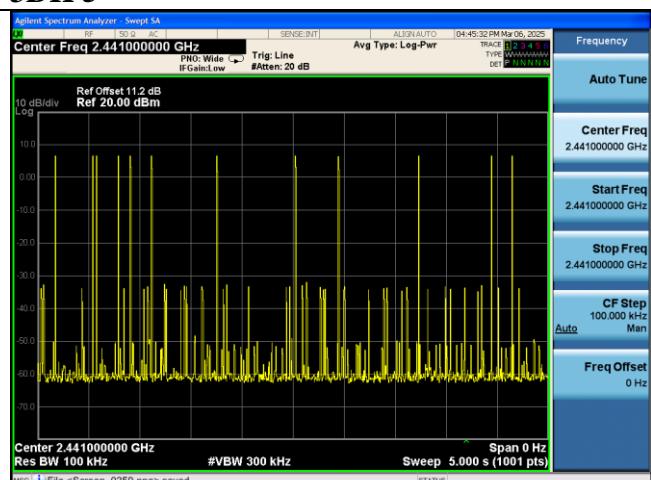

10. MAXIMUM PEAK OUTPUT POWER TEST

10.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

10.2. Test Procedure

Use the test method described in ANSI C63.10 clause 7.8.5:

Connect the EUT's antenna port to Power Sensor, and use power meter to test peak output power directly.

10.3. Test Results

EUT: Notebook Computer			
M/N: N24G4			
Date: 2025-02-17	Pressure: 102.4±1.0 kpa	Humidity: 53.7±3.0%	
Tested by: Epoch	Test Site: RF site	Temperature: 21.6±0.6°C	


Test Mode	CH	Power Setting	Peak Output Power (dBm)	Limit (dBm)
GFSK	CH0	Default	6.674	21
	CH39		7.060	
	CH78		6.866	
8-DPSK	CH0	Default	7.479	21
	CH39		7.765	
	CH78		7.838	

GFSK

2402MHz


8-DPSK

2402MHz

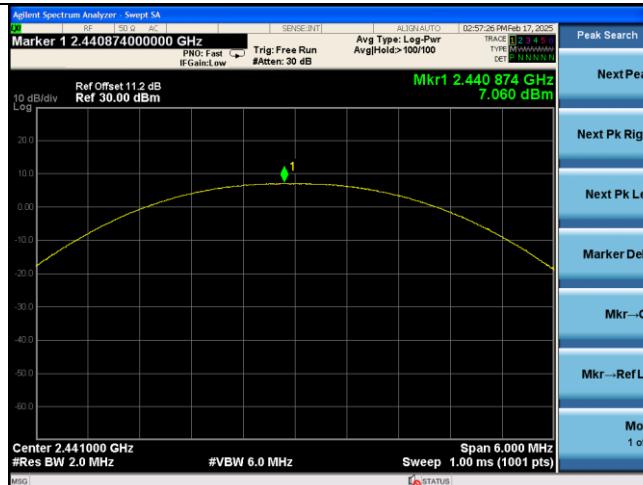
2441MHz

2441MHz

2480MHz

2480MHz


11. BAND EDGE COMPLIANCE TEST

11.1. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

11.2. Test Procedure

Use the test method described in ANSI C63.10 clause 7.8.6:

For upper band emissions that are up to two bandwidths(2MHz) away (2483.5MHz to 2485.5MHz) from the band-edge use below produce:

1. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 100KHz and with a video bandwidth 300KHz. Record the peak levels of the fundamental emission and the relEpoch band-edge emission, Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement, it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.
2. Subtract the delta measured in step (1) from the maximum field strengths measured in clause 4 .The resultant field strengths are then used to determine band-edge compliance as required by Section 15.205

For emissions above two bandwidths away from the band-edge use below produce:


1. The EUT is placed on a insulating material (up to 12mm thick) worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upperband-edges of the emission:
 - (a) PEAK: RBW=1MHz ;VBW=3MHz, PK detector, Sweep=AUTO
 - (b) This is pulse Modulation device a duty cycle factor was used to calculate average level based measured peak level.

11.3. Test Results

Pass (The testing data was attached in the next pages.)

Note: If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

8DPSK Mode

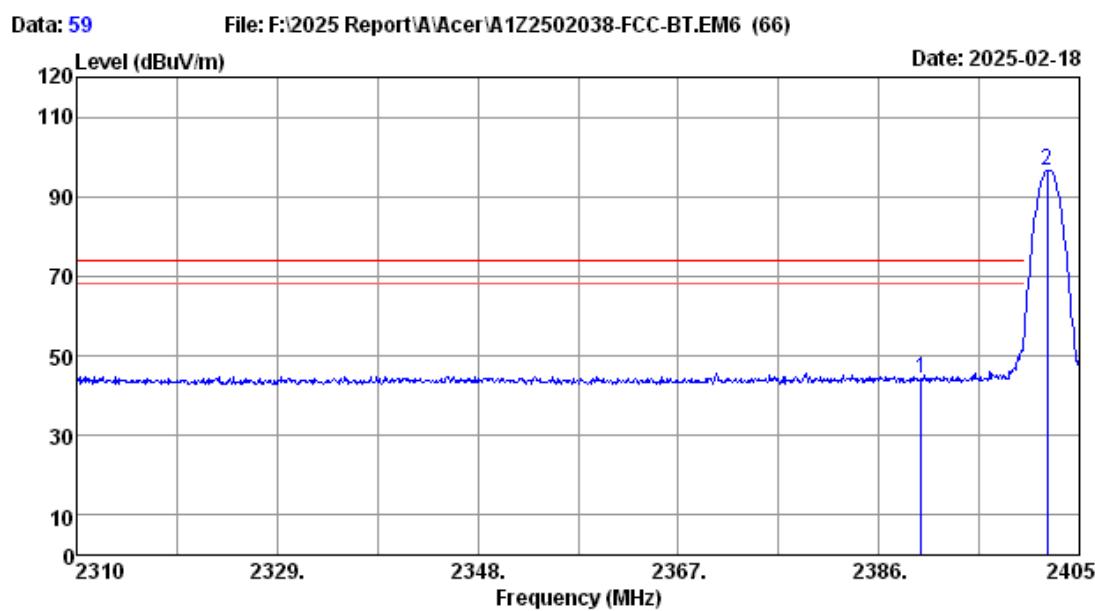


Site no. : 3m Chamber Data no. : 59
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK Engineer : Epoch
Env. / Ins. : 23.2°C/52.6%
Test Mode : BT3.0 8-DPSK 2402MHz TX Mode AUIT1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.20	31.70	43.23	44.37	74.00	29.63	Peak	
2	2401.96	27.70	5.22	31.70	95.26	96.48	-----	-----	Peak	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor(Peak)
2. The emission levels that are 20dB below the official
limit are not reported

Data: 60 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)

Date: 2025-03-06

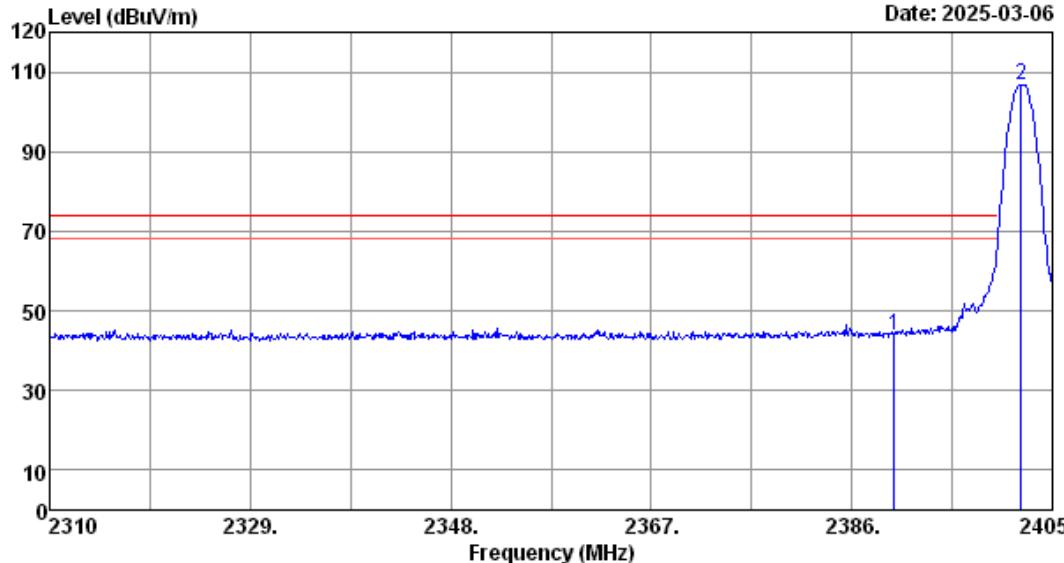


Site no. : 3m Chamber Data no. : 60
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK Engineer : Epoch
Env. / Ins. : 23.2°C/52.6%
Test Mode : BT3.0 8-DPSK 2402MHz TX Mode AINT1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	5.20	31.70	42.85	43.99	74.00	30.01	Peak	Peak
2	2402.00	27.70	5.22	31.70	105.68	106.90	-----	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor(Peak)
2. The emission levels that are 20dB below the official
limit are not reported

Data: 61 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)

Date: 2025-02-18

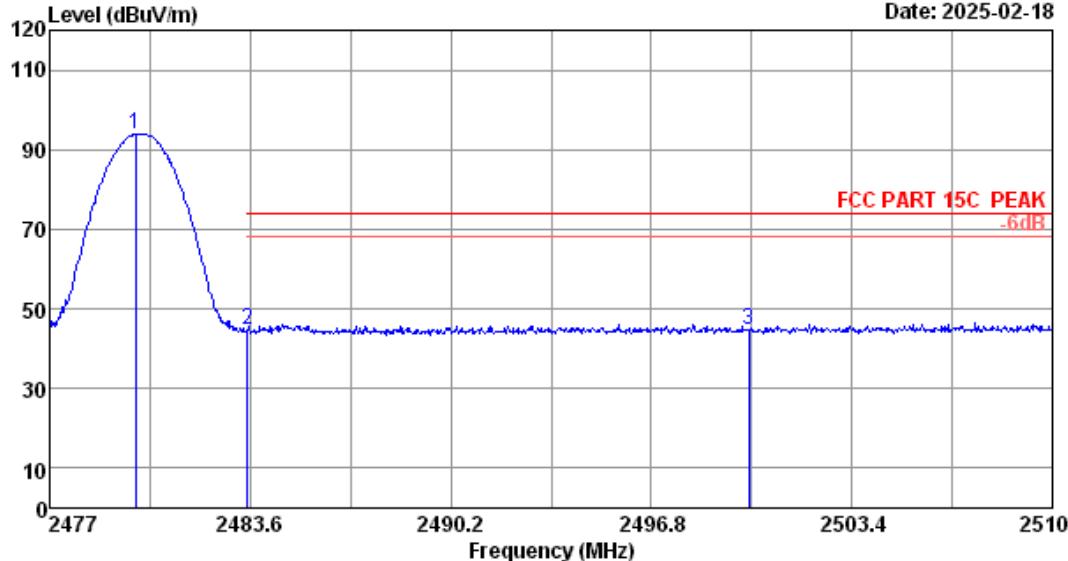


Site no. : 3m Chamber Data no. : 61
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK Engineer : Epoch
Env. / Ins. : 23.2°C/52.6%
Test Mode : BT3.0 8-DPSK 2480MHz TX Mode AINT1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Emission			Margin	
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Limits (dB)	Remark
1	2479.84	27.82	5.30	31.66	92.33	93.79	-----	-----	Peak
2	2483.50	27.83	5.30	31.66	43.15	44.62	74.00	29.38	Peak
3	2500.00	27.90	5.32	31.65	43.13	44.70	74.00	29.30	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor(Peak)
2. The emission levels that are 20dB below the official limit are not reported

Data: 62 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)

Date: 2025-02-18

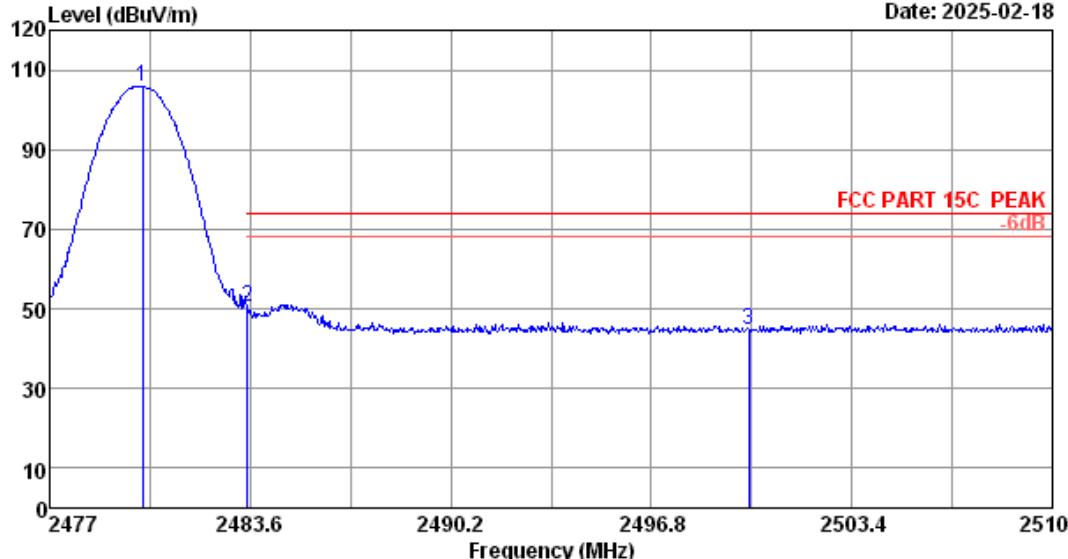


Site no. : 3m Chamber Data no. : 62
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : BT3.0 8-DPSK 2480MHz TX Mode A1T1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Emission			Margin Remark
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	
1	2480.07	27.82	5.30	31.66	104.23	105.69	-----	Peak
2	2483.50	27.83	5.30	31.66	49.02	50.49	74.00	23.51 Peak
3	2500.00	27.90	5.32	31.65	42.96	44.53	74.00	29.47 Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

GFSK Mode

Data: 55 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)

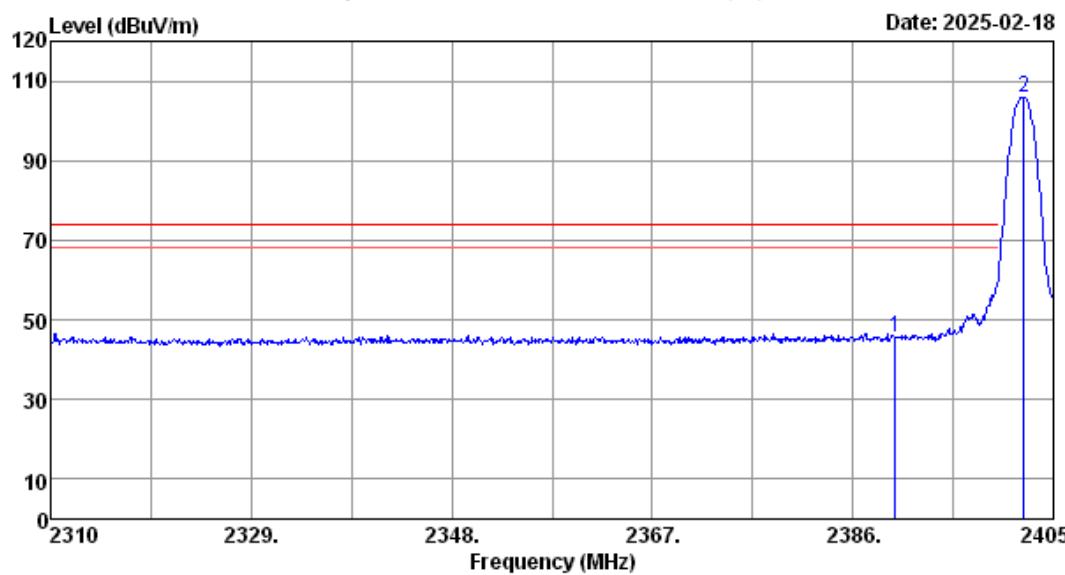


Site no. : 3m Chamber Data no. : 55
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : BT3.0 GFSK 2402MHz TX Mode ANT1

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission			Margin	
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Limits (dBuV/m)	Remark
1	2390.00	27.64	5.20	31.70	44.58	45.72	74.00	28.28	Peak
2	2402.25	27.70	5.22	31.70	104.54	105.76	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor(Peak)
 2. The emission levels that are 20dB below the official limit are not reported

Data: 56 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)

Date: 2025-02-18

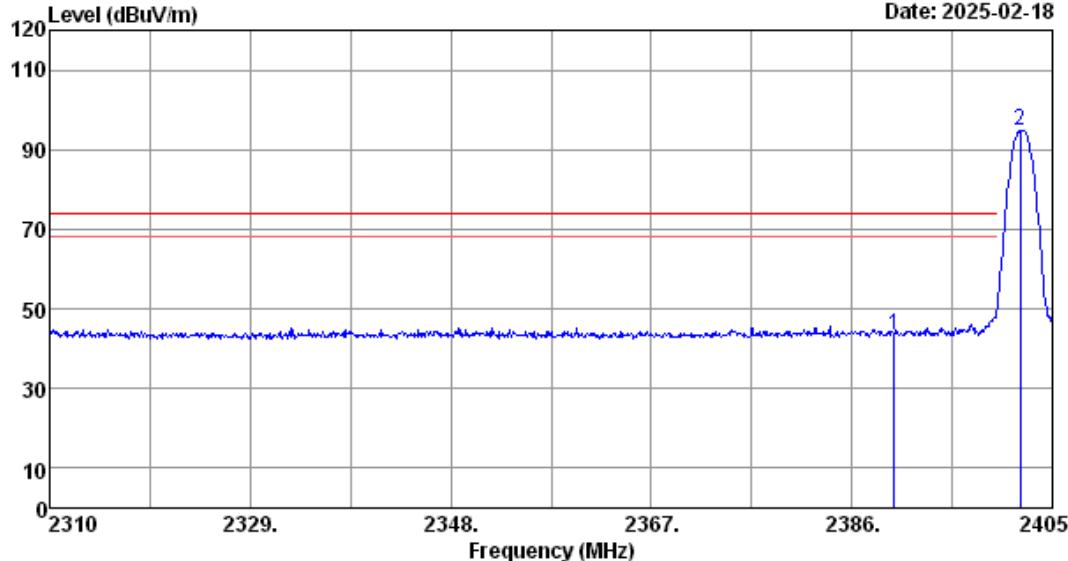


Site no. : 3m Chamber Data no. : 56
Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK Engineer : Epoch
Env. / Ins. : 23.2°C/52.6%
Test Mode : BT3.0 GFSK 2402MHz TX Mode ANT1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Emission			Margin Remark
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	
1	2390.00	27.64	5.20	31.70	42.30	43.44	74.00	30.56 Peak
2	2401.96	27.70	5.22	31.70	93.45	94.67	-----	----- Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor(Peak)
2. The emission levels that are 20dB below the official
limit are not reported

Data: 57 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)

Date: 2025-02-18

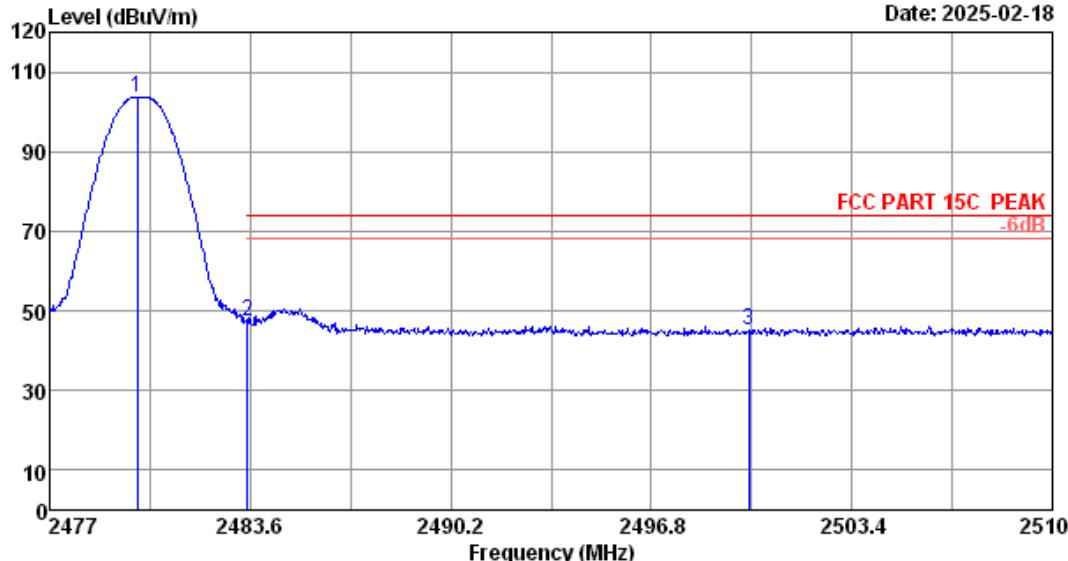


Site no. : 3m Chamber Data no. : 57
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : BT3.0 GFSK 2480MHz TX Mode ANT1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Emission			Margin Remark
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	
1	2479.87	27.82	5.30	31.66	102.26	103.72	-----	Peak
2	2483.50	27.83	5.30	31.66	45.95	47.42	74.00	26.58 Peak
3	2500.00	27.90	5.32	31.65	43.66	45.23	74.00	28.77 Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

Data: 58 File: F:\2025 Report\A\Acer\A1Z2502038-FCC-BT.EM6 (66)

Date: 2025-02-18

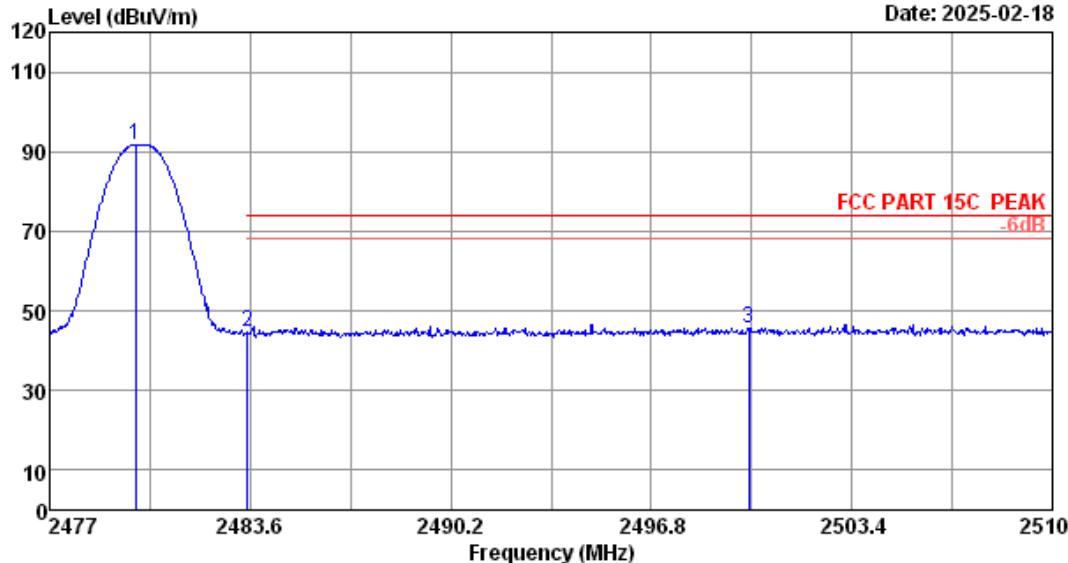

Site no. : 3m Chamber Data no. : 58
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : BT3.0 GFSK 2480MHz TX Mode ANT1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Emission			Margin Limits (dB)	Remark
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)		
1	2479.84	27.82	5.30	31.66	90.36	91.82	-----	-----	Peak
2	2483.50	27.83	5.30	31.66	43.41	44.88	74.00	29.12	Peak
3	2500.00	27.90	5.32	31.65	44.16	45.73	74.00	28.27	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

12. ANTENNA REQUIREMENT

12.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2. Antenna Connected Construction

The antennas used for this product are PIFA Antenna that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 2.43dBi.

13. DEVIATION TO TEST SPECIFICATIONS

[NONE]

..... **THE END**