

Variant FCC RF Test Report

APPLICANT : Acer Incorporated
EQUIPMENT : Tablet Computer
BRAND NAME :  Gateway
MODEL NAME : TP-A60W
FCC ID : HLZTMDMA500
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : Digital Transmission System (DTS)

This is a variant report which is only valid together with the original test report. The product was received on May 11, 2011 and completely tested on May 13, 2011. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test	6
1.4 Testing Site	7
1.5 Applied Standards	7
1.6 Ancillary Equipment List	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 RF Power	8
2.2 Test Mode	9
2.3 Connection Diagram of Test System	10
2.4 RF Utility	10
3 TEST RESULT	11
3.1 Band Edges Measurement	11
3.2 AC Conducted Emission Measurement	14
3.3 Radiated Emission Measurement	18
3.4 Antenna Requirements	25
4 LIST OF MEASURING EQUIPMENT	26
5 UNCERTAINTY OF EVALUATION	27
APPENDIX A. PHOTOGRAPHS OF EUT	
APPENDIX B. SETUP PHOTOGRAPHS	
APPENDIX C. ORIGINAL REPORT	

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR112908-02B	Rev. 01	This is a variant report. All the test cases were performed in original report which can be referred to Sporton Report No. FR112908B as appendix C. Detail changes list as below : 1. Changing appearance of EUT 2. Add Docking 3. Add memory cards for Samsung 32GB and Sandisk 16GB 4. Change Bluetooth and WLAN Antenna (module, antenna gain and antenna type are same as the original) For changes, only the worst case of the Band Edge, Conducted Emission, Radiated Emission tests and Conducted power were verified.	May 25, 2011

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(d)	A8.5	Frequency Band Edges	$\leq 20\text{dBc}$	Pass	-
3.2	15.207	Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 9.5 dB at 0.19 MHz
3.3	15.247(d)	A8.5	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 4.75 dB at 2390 MHz
3.4	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

Acer Incorporated

8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 22181, Taiwan (R.O.C)

1.2 Manufacturer

1. Compal Electronics, Inc.

No. 581, Ruiguang Rd., Neihu District, Taipei City 11492, Taiwan

2. Compal Electronics Technology (Kunshan) Co., Ltd.

No. 25, Third Avenue, A Zone, Kunshan Comprehensive Free Trade Zone, Kunshan, Jiangsu, China

3. Compal Information (Kunshan) Co., Ltd.

No. 15, Third Avenue, A Zone, Kunshan Comprehensive Free Trade Zone, Kunshan, Jiangsu, China

4. Compal Information Technology (Kunshan) Co., Ltd.

No. 58, First Avenue, A Zone, Kunshan Comprehensive Free Trade Zone, Kunshan, Jiangsu, China

5. Compalead Eletrônica Do Brasil Indústria E Comércio Ltda

Rua Kanebo 175, Galpões C1, C2, C3, C4, C5 C6 E C12, Bairro Distrito Industrial Jundiaí Business Park, Cep 13213-090, Jundiaí - São Paulo, Brasil

6. Compal (Vietnam) Co., Ltd.

Ba Thien Industrial Zone, Ba Hien Commune, Binh Xuyen County, Vinh Phuc Province, Vietnam

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Tablet Computer
Brand Name	 Gateway
Model Name	TP-A60W
FCC ID	HLZTMDMA500
Tx/Rx Frequency Range	2400 MHz ~ 2483.5 MHz
Number of Channels	11
Carrier Frequency of Each Channel	2412+(n-1)*5 MHz; n=1~11
Channel Spacing	5 MHz
Maximum Output Power to Antenna	802.11b : 17.79 dBm (0.06 W) 802.11g : 22.70 dBm (0.19 W) 802.11n (BW 20MHz) : 22.02 dBm (0.16 W)
Antenna Type	PIFA Antenna with gain 1.75 dBi
HW Version	Rev:3.0
Type of Modulation	802.11b : DSSS (BPSK / QPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)
EUT Stage	Identical Prototype

Remark:

1. For other wireless features of this EUT, test report will be issued separately.
2. This test report recorded only product characteristics and test results of Digital Transmission System (DTS).
3. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	CO05-HY	03CH07-HY	722060/4086B-1

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 (Measurement Guidelines of DTS)
- ANSI C63.4-2003
- IC RSS-210 Issue 8

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.

1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A
3.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	Vostro 1510	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	LCD Monitor	Dell	U2410	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m
6.	iPod Earphone	Apple	N/A	FCC DoC	Unshielded, 1.0 m	N/A
7.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A

2 Test Configuration of Equipment Under Test

2.1 RF Power

Preliminary tests were performed in different data rate and recorded the RF power output in the following table:

Channel	Frequency	2.4GHz 802.11b RF Power (dBm)			
		DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412 MHz	17.79	17.74	17.76	17.77

Channel	Frequency	2.4GHz 802.11g RF Power (dBm)							
		OFDM Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 06	2437 MHz	22.70	22.68	22.52	22.59	22.66	22.61	22.65	22.60

Channel	Frequency	2.4GHz 802.11n (BW 20MHz) RF Power (dBm)							
		OFDM Data Rate							
		MCS=0	MCS=1	MCS=2	MCS=3	MCS=4	MCS=5	MCS=6	MCS=7
CH 06	2437 MHz	22.02	21.83	21.80	21.47	21.43	21.55	21.77	21.83

Remark:

1. The data rates of WLAN 802.11b/g/n were set in 1Mbps for 802.11b, 6Mbps for 802.11g, MCS0 for 802.11n (BW 20MHz) for all the test cases due to the highest RF output power.
2. The EUT is programmed to transmit signals continuously for all testing.
3. Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports.

2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz), radiated emission (30 MHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Pre-scanned tests, X, Y, Z in three orthogonal panels, were conducted to determine the final configuration from all possible combinations, laptop / tablet modes.

The following tables are showing the test modes as the worst cases and recorded in this report.


Test Cases	
Test Item	802.11n (Modulation : OFDM)
Radiated TCs	Mode 1: 802.11n (BW 20M)_CH01_2412 MHz Mode 2: 802.11n (BW 20M)_CH01_2412 MHz + Dock
AC Conducted Emission	Mode 1 : WLAN Link + Bluetooth Link + GPS Rx + Adapter + USB Cable (Link with Notebook) + Docking + TC
Remark: TC stands for Test Configuration, and consists of iPod, camera, MP3, HDMI, earphone, notebook and monitor.	

2.3 Connection Diagram of Test System

<WLAN Tx Mode>

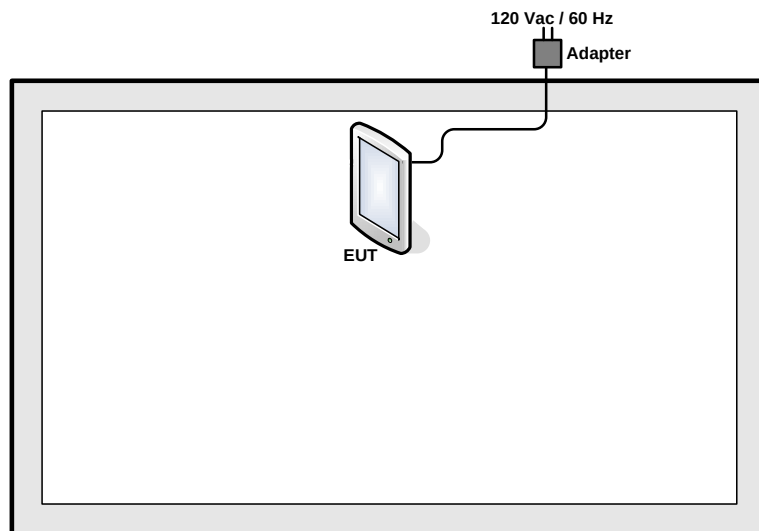

<AC Conducted Emission Mode>

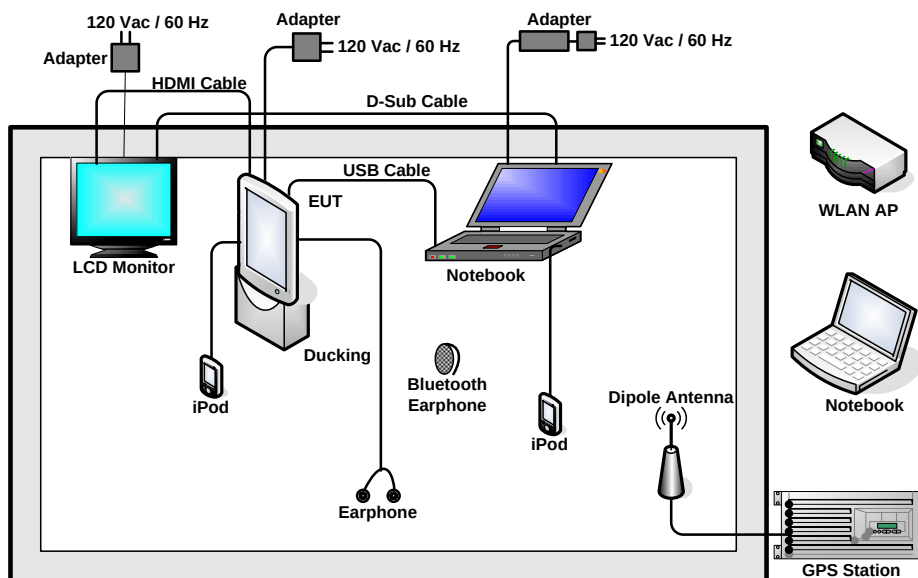

2.4 RF Utility

Execute command in EUT to provide channel selection, power level, data rate and the application type. RF utility can send transmitting signal for all testing. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

3 Test Result

3.1 Band Edges Measurement

3.1.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The testing follows the guidelines in ANSI C63.4-2003 and FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. Conducted emission test: Set RBW = 100 kHz, Video bandwidth (VBW) $\geq$ RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Apply to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 10 Hz, Sweep=Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation as in FCC Section 15.35(b) and (c).

3.1.4 Test Setup

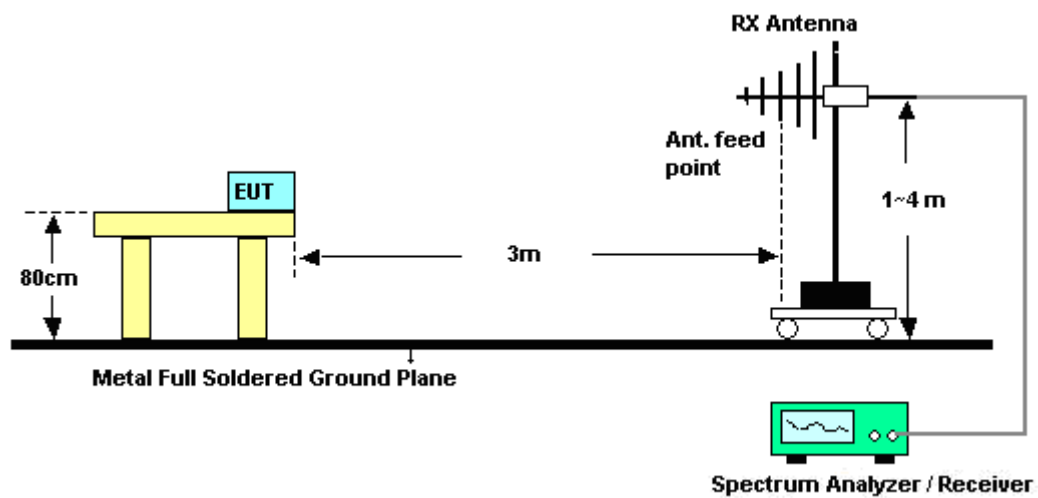

3.1.5 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	23~26℃
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	54~60%
Test Channel :	01	Test Engineer :	Wii Chang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2390	69.25	-4.75	74	64.89	32.18	6.03	33.85	130	242	Peak
2390	48.39	-5.61	54	44.03	32.18	6.03	33.85	130	242	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2390	65.8	-8.2	74	61.44	32.18	6.03	33.85	102	310	Peak
2390	43.93	-10.07	54	39.57	32.18	6.03	33.85	102	310	Average

Test Mode :	Mode 2 with Dock	Temperature :	23~26℃
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	54~60%
Test Channel :	01	Test Engineer :	Wii Chang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2386.57	60.18	-13.82	74	55.82	32.18	6.03	33.85	107	0	Peak
2386.57	39.35	-14.65	54	34.99	32.18	6.03	33.85	107	0	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.61	63.15	-10.85	74	58.79	32.18	6.03	33.85	100	182	Peak
2389.61	41.93	-12.07	54	37.57	32.18	6.03	33.85	100	182	Average

3.2 AC Conducted Emission Measurement

3.2.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.2.4 Test Setup

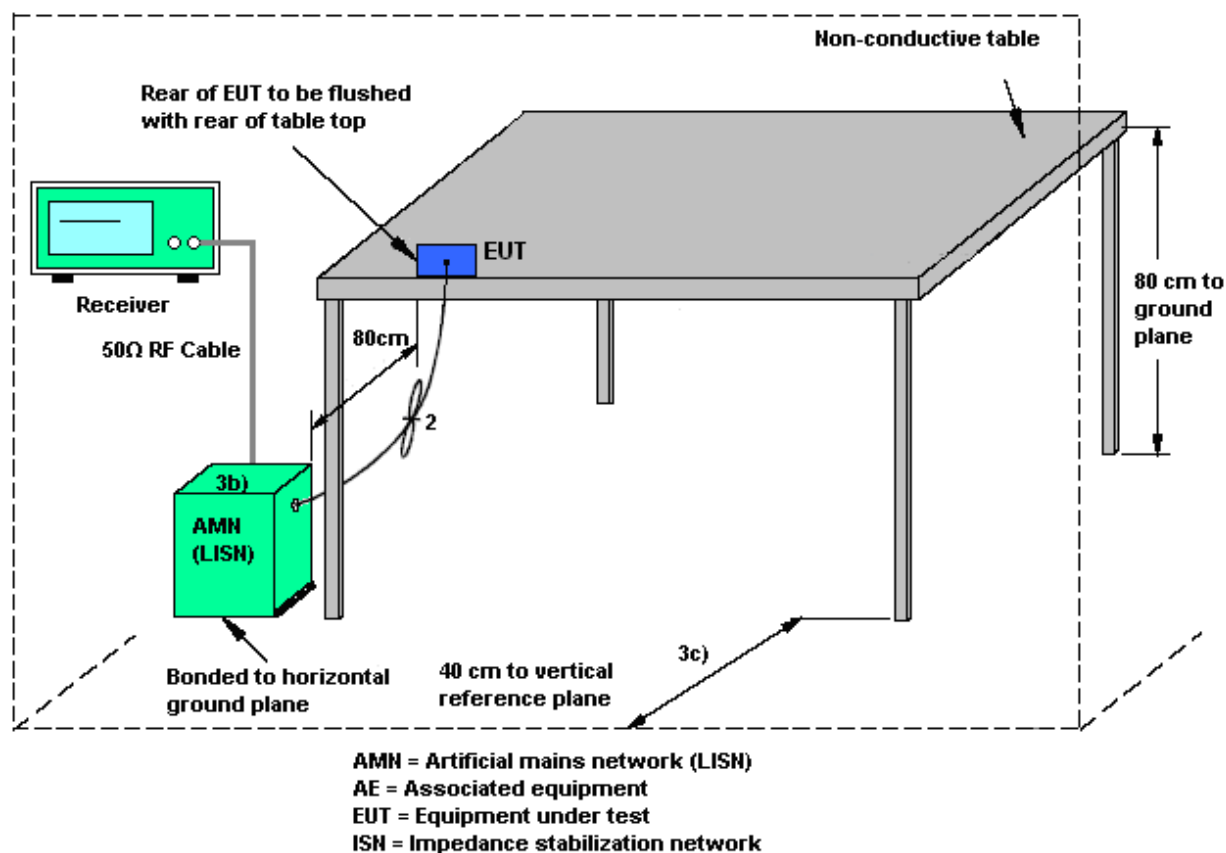

3.2.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Novic Chiang	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WLAN Link + Bluetooth Link + GPS Rx + Adapter + USB Cable (Link with Notebook) + Docking + TC		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

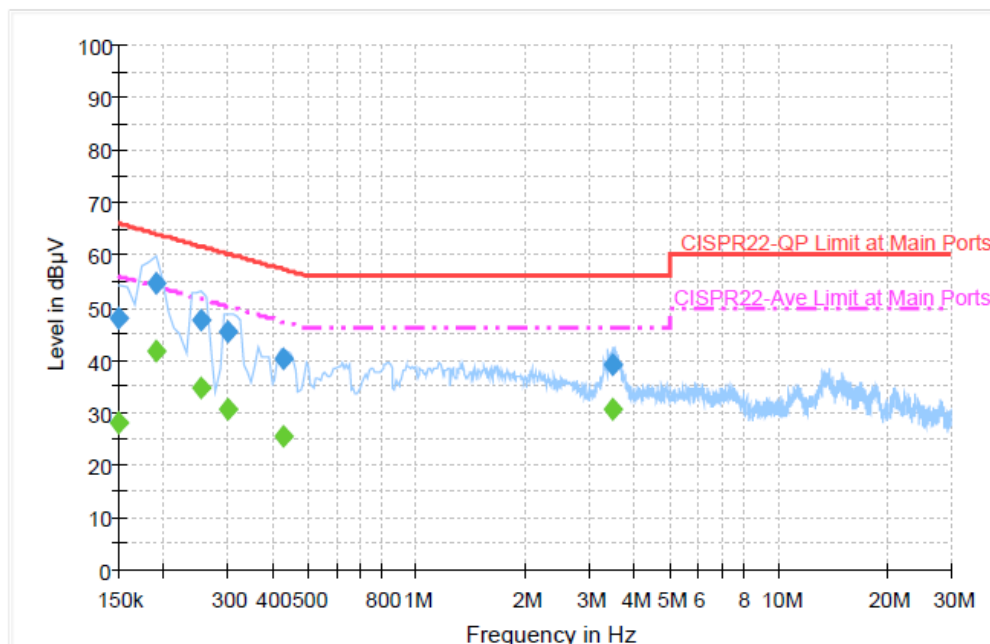


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	47.9	Off	L1	19.4	18.1	66.0
0.190000	54.5	Off	L1	19.4	9.5	64.0
0.254000	47.6	Off	L1	19.4	14.0	61.6
0.302000	45.5	Off	L1	19.4	14.7	60.2
0.430000	40.1	Off	L1	19.5	17.2	57.3
3.486000	39.1	Off	L1	19.5	16.9	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	28.2	Off	L1	19.4	27.8	56.0
0.190000	41.8	Off	L1	19.4	12.2	54.0
0.254000	34.8	Off	L1	19.4	16.8	51.6
0.302000	30.7	Off	L1	19.4	19.5	50.2
0.430000	25.3	Off	L1	19.5	22.0	47.3
3.486000	30.8	Off	L1	19.5	15.2	46.0

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Novic Chiang	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WLAN Link + Bluetooth Link + GPS Rx + Adapter + USB Cable (Link with Notebook) + Docking + TC		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

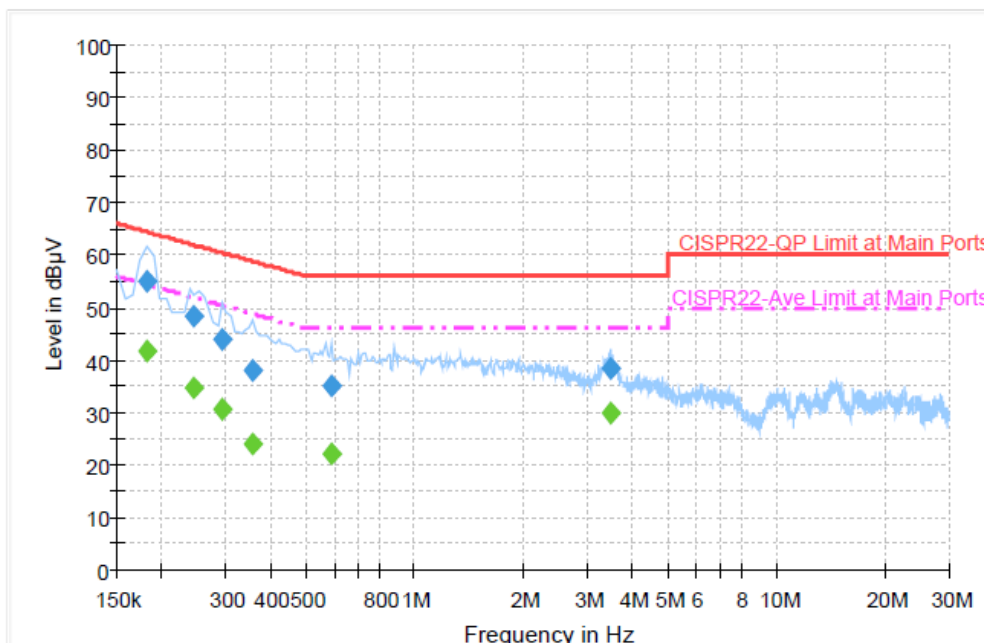
Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.182000	54.8	Off	N	19.4	9.6	64.4
0.246000	48.4	Off	N	19.4	13.5	61.9
0.294000	43.9	Off	N	19.4	16.5	60.4
0.358000	38.1	Off	N	19.4	20.7	58.8
0.590000	35.2	Off	N	19.4	20.8	56.0
3.486000	38.4	Off	N	19.5	17.6	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.182000	41.8	Off	N	19.4	12.6	54.4
0.246000	34.6	Off	N	19.4	17.3	51.9
0.294000	30.7	Off	N	19.4	19.7	50.4
0.358000	24.0	Off	N	19.4	24.8	48.8
0.590000	22.3	Off	N	19.4	23.7	46.0
3.486000	30.0	Off	N	19.5	16.0	46.0

3.3 Radiated Emission Measurement

3.3.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.3.2 Measuring Instruments


See list of measuring instruments of this test report.

3.3.3 Test Procedures


- The testing follows the guidelines in FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
- Use the following spectrum analyzer settings:
 - Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
 - Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.
Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB)
- Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

3.3.4 Test Setup


For radiated emissions below 30MHz

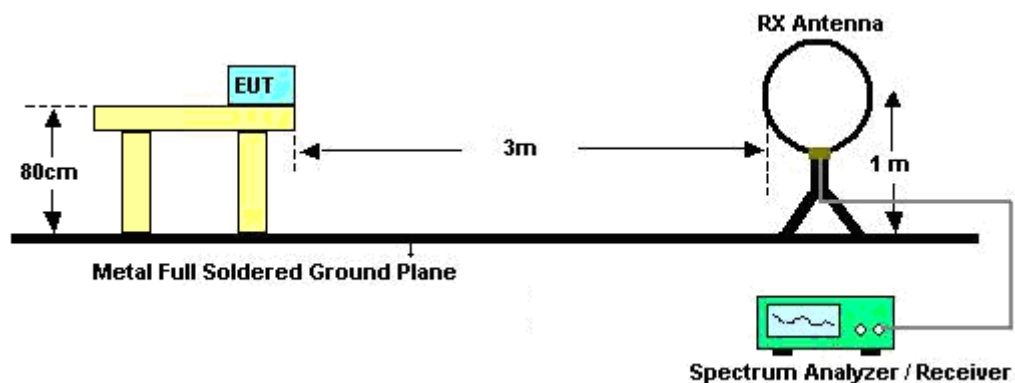

For radiated emissions from 30MHz to 1GHz

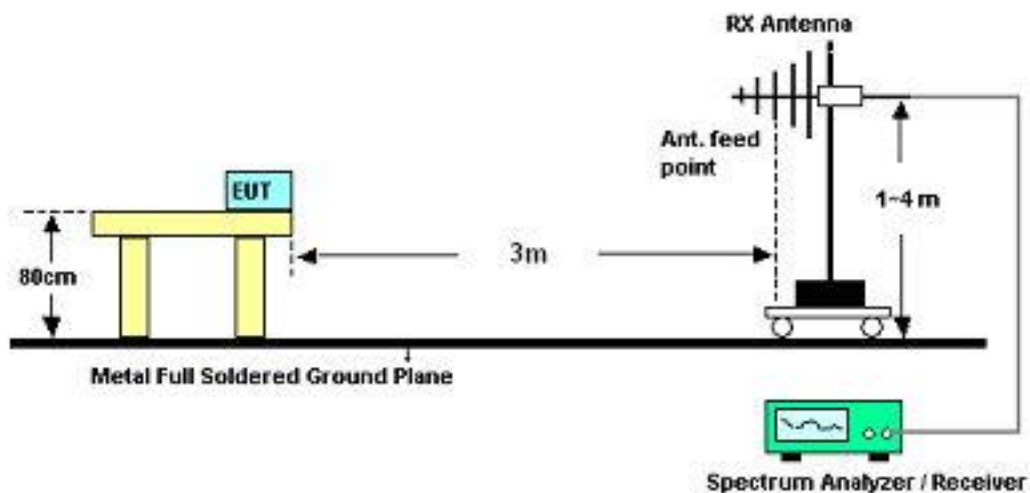

For radiated emissions above 1GHz

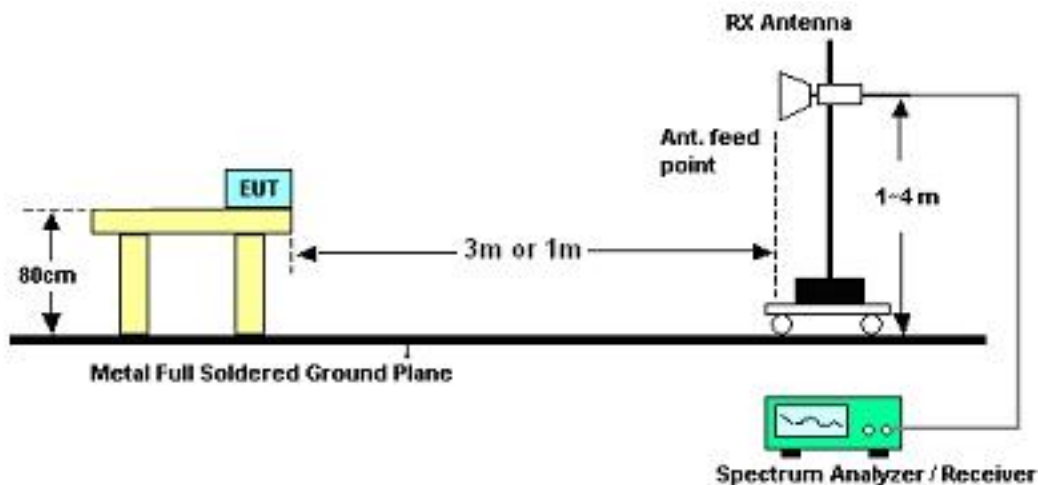

3.3.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

Test Engineer :	Wii Chang	Temperature :	23~26℃	
		Relative Humidity :	54~60%	

Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.3.6 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	Mode 1	Temperature :	23~26℃
Test Channel :	01	Relative Humidity :	54~60%
Test Engineer :	Wii Chang	Polarization :	Horizontal
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
57	29.6	-10.4	40	53.96	6.45	0.74	31.55	-	-	Peak
84.54	29.83	-10.17	40	52.67	7.8	0.9	31.54	100	153	Peak
166.62	24.27	-19.23	43.5	44.6	9.96	1.23	31.52	-	-	Peak
346.9	17.52	-28.48	46	31.93	14.93	1.95	31.29	-	-	Peak
369.3	26.37	-19.63	46	39.92	15.63	2.08	31.26	-	-	Peak
430.9	23.95	-22.05	46	35.76	17.07	2.25	31.13	-	-	Peak
2390	69.25	-4.75	74	64.89	32.18	6.03	33.85	130	242	Peak
2390	48.39	-5.61	54	44.03	32.18	6.03	33.85	130	242	Average
2412	108.48	-	-	104.08	32.2	6.07	33.87	130	242	Peak
2412	90.15	-	-	85.75	32.2	6.07	33.87	130	242	Average
2486	50.53	-23.47	74	45.97	32.28	6.18	33.9	130	242	Peak
2486	36.91	-17.09	54	32.35	32.28	6.18	33.9	130	242	Average



Test Mode :	Mode 1	Temperature :	23~26℃
Test Channel :	01	Relative Humidity :	54~60%
Test Engineer :	Wii Chang	Polarization :	Vertical
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30.81	31.37	-8.63	40	46.02	16.27	0.54	31.46	100	133	Peak
50.25	27.47	-12.53	40	50.03	8.28	0.7	31.54	-	-	Peak
86.97	21.93	-18.07	40	44.3	8.24	0.92	31.53	-	-	Peak
340.6	16.06	-29.94	46	30.75	14.72	1.89	31.3	-	-	Peak
405.7	17.87	-28.13	46	30.22	16.66	2.16	31.17	-	-	Peak
484.1	20.06	-25.94	46	30.77	17.96	2.39	31.06	-	-	Peak
2390	65.8	-8.2	74	61.44	32.18	6.03	33.85	102	310	Peak
2390	43.93	-10.07	54	39.57	32.18	6.03	33.85	102	310	Average
2412	105.24	-	-	100.84	32.2	6.07	33.87	102	310	Peak
2412	87.09	-	-	82.69	32.2	6.07	33.87	102	310	Average
2494	35.29	-18.71	54	30.71	32.3	6.18	33.9	102	310	Average
2494	47.64	-26.36	74	43.06	32.3	6.18	33.9	102	310	Peak



Test Mode :	Mode 2 with Dock	Temperature :	23~26℃
Test Channel :	01	Relative Humidity :	54~60%
Test Engineer :	Wii Chang	Polarization :	Horizontal
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
48.9	27.66	-12.34	40	49.43	9.08	0.68	31.53	100	131	Peak
167.97	21.53	-21.97	43.5	41.93	9.89	1.23	31.52	-	-	Peak
196.86	23.29	-20.21	43.5	44.38	9.09	1.31	31.49	-	-	Peak
327.3	20.41	-25.59	46	35.58	14.3	1.84	31.31	-	-	Peak
383.3	18.64	-27.36	46	31.71	16.05	2.11	31.23	-	-	Peak
458.2	21.15	-24.85	46	32.39	17.52	2.32	31.08	-	-	Peak
2386.57	60.18	-13.82	74	55.82	32.18	6.03	33.85	107	0	Peak
2386.57	39.35	-14.65	54	34.99	32.18	6.03	33.85	107	0	Average
2412	102.94	-	-	98.54	32.2	6.07	33.87	107	0	Peak
2412	85.66	-	-	81.26	32.2	6.07	33.87	107	0	Average
2484	33.47	-20.53	54	28.91	32.28	6.18	33.9	107	0	Average
2484	46.26	-27.74	74	41.7	32.28	6.18	33.9	107	0	Peak



Test Mode :	Mode 2 with Dock	Temperature :	23~26℃
Test Channel :	01	Relative Humidity :	54~60%
Test Engineer :	Wii Chang	Polarization :	Vertical
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
49.17	29.93	-10.07	40	52.09	8.68	0.69	31.53	100	161	Peak
82.11	22.76	-17.24	40	45.89	7.51	0.89	31.53	-	-	Peak
196.86	19.57	-23.93	43.5	40.66	9.09	1.31	31.49	-	-	Peak
393.8	18.33	-27.67	46	31.02	16.38	2.13	31.2	-	-	Peak
491.8	20.04	-25.96	46	30.6	18.09	2.42	31.07	-	-	Peak
592.6	23.4	-22.6	46	32.01	19.65	2.67	30.93	-	-	Peak
2389.61	63.15	-10.85	74	58.79	32.18	6.03	33.85	100	182	Peak
2389.61	41.93	-12.07	54	37.57	32.18	6.03	33.85	100	182	Average
2412	102.58	-	-	98.18	32.2	6.07	33.87	100	182	Peak
2412	85.16	-	-	80.76	32.2	6.07	33.87	100	182	Average
2486	35.31	-18.69	54	30.75	32.28	6.18	33.9	100	182	Average
2486	47.23	-26.77	74	42.67	32.28	6.18	33.9	100	182	Peak

3.4 Antenna Requirements

3.4.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.4.2 Antenna Connected Construction

The antennas type used in this product is PIFA Antenna without connector and it is considered to meet antenna requirement.

3.4.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	0932001	N/A	Sep. 13, 2010	Sep. 12, 2011	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	0846202	N/A	Sep. 14, 2010	Sep. 13, 2011	Conducted (TH02-HY)
EMI Test Receive	R&S	ESCS 30	100356	9KHz – 2.75GHz	Aug. 16, 2010	Aug. 15, 2011	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9KHz – 30MHz	Dec. 03, 2010	Dec. 02, 2011	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9KHz – 30MHz	Dec. 01, 2010	Nov. 30, 2011	Conduction (CO05-HY)
AC Power Source	APC	APC-1000 W	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
GPS Station	T&E	GS-50	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Oct. 31, 2010	Oct. 30, 2011	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP	101067	9KHz ~ 30GHz	Dec. 03, 2010	Dec. 02, 2011	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 19, 2010	Aug. 18, 2011	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz- 40GHz	Oct. 18, 2010	Oct. 17, 2011	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Dec. 06, 2010	Dec. 05, 2011	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32 dB.GAIN	Mar. 29, 2011	Mar. 28, 2012	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz~30 MHz	Jul. 29, 2010	Jul. 28, 2011	Radiation (03CH07-HY)
Bluetooth Base Station	R&S	CBT32	100522	N/A	Jan.13, 2011	Jan.13, 2013	Radiation (03CH07-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
Combined Standard Uncertainty $U_c(y)$	1.13		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.26		

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	± 0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	± 1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	± 0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	± 2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	± 1.50	Rectangular	0.87	1	0.87
Site Imperfection	± 2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				



Appendix A. Photographs of EUT

Please refer to Sporton report number EP112908-02 as below.



Appendix C. Original Report

Please refer to Sporton report number FR112908B as below.