



Appendix F - FCC 3G SAR Measurement Procedures

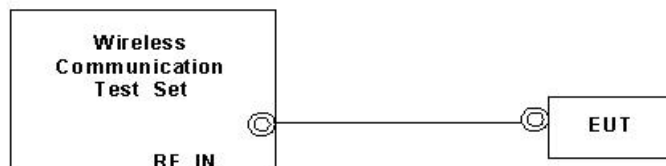
Conducted Output Power:

The PBA is fulfilled. The EUT was tested according to the requirements of the FCC 3G procedures and the TS 34.121. The EUT's WCDMA and HSPA function is Release 6 version supporting HSDPA Category 8, and HSUPA Category 5. A detailed analysis of the output power for all WCDMA, HSPDA, and HSPA (HSUPA&HSDPA) modes is provided in the tables below. According to the FCC 3G procedures, handsets with both HSDPA and HSUPA should be tested according to Release 6 HSPA test procedures, and the EUT does not support VOIP function over the HSPA function. Device was tested according to procedure KDB941225 - section Release 6 HSPA Data Devices as documented/evaluated in the following table.

WCDMA SAR Test mode - Conducted Power							
Mode	Setup	Cell band (850)			PCS band (1900)		
		CH4132	CH4182	CH4233	CH9262	CH9400	CH9538
		826.4 (MHz)	836.4 (MHz)	846.6 (MHz)	1852.4 (MHz)	1880.0 (MHz)	1907.6 (MHz)
R99 - WCDMA	RMC 12.2Kbps	24.64	24.46	24.46	24.64	24.64	24.44
R5 - HSDPA	HSDPA - subtest 1	24.44	24.37	24.32	24.31	24.39	24.01
	HSDPA - subtest 2	23.97	23.75	23.77	23.92	23.93	23.86
	HSDPA - subtest 3	23.96	23.87	23.77	24.05	23.99	23.59
	HSDPA - subtest 4	23.44	23.37	23.37	23.42	23.42	23.15
R6 - HSPA (HSUPA & HSDPA)	HSUPA - subtest 1	23.42	23.50	23.58	23.71	23.75	23.5
	HSUPA - subtest 2	21.51	21.43	21.45	21.88	21.80	21.59
	HSUPA - subtest 3	22.54	22.43	22.45	22.75	22.83	22.57
	HSUPA - subtest 4	21.90	21.92	21.96	22.19	22.21	21.97
	HSUPA - subtest 5	23.55	23.46	23.47	23.84	23.97	23.45

WCDMA Setup Configuration:

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting
 - i. Data rates: Varied from RMC 12.2Kbps.
 - ii. RMC Test Loop=Loop Mode 1
 - iii. Power Ctrl Mode= All Up bits.
- d. The transmitted maximum output power was recorded.


Setup Configuration
HSDPA Setup Configuration:

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors(β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121.
 - iii. Set RMC12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set DeltaACK, DeltaNACK and DeltaCQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode= All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSPA (HSUPA & HSPDA) Setup Configuration:

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121.
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits.
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtests' E-TFCI.
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

Note: For details settings in the Agilent 8960 test equipment, please refer to the user guide "HSUPA Measurement Guide with 8960 V7.5.0 Release 7 (2007-06) Ver.: v.02.18"

Call Setup Screen									
Call Control		Active Cell Operating Mode						Call Parms	
Channel (UARFCN) Info		UE Information INSI: INEI: Power Class:						Cell Power	
Cell Parameters								-86.00	
Generator Info		UE Expected Open Loop Transmit Power Initial PRACH TX Power: -11.70 dBm Initial DPCCH TX Power: -0.56 dBm						dBm/3.84 MHz	
Uplink Parameters								Channel Type	
Uplink Parameters		Uplink Parameters PRACH Preambles: 64 PRACH Ramping Cycles(MAX): 2 Available Subchannels (Bit Mask): 000000000001						12.2k + HSPA	
UE Rep Meas								Paging Service	
Close Menu		Uplink Parameters Uplink DPCCH Scrambling Code: 0 Uplink DPCCH Bc/Bd Control: Manual Manual Uplink DPCCH Bc: 11 Manual Uplink DPCCH Bd: 15 Maximum Uplink Transmit Power Level: 21 dBm						RB Test Mode	
2 of 4								HSPA Parameters	
		Call Processing Status Current Service Type: None MM Status: Index 15: (67/15)^2 GMM State: Index 16: (75/15)^2 Current DPCCH: Index 17: (84/15)^2 HSPA In: Index 18: (95/15)^2 UE Rep E-DCH: Index 19: (106/15)^2 Last Received Throughput: Index 20: (119/15)^2 ACKs Transmitted:						34.121 Preset Call Configs	
								Channel (UARFCN) Parms	
		Active Cell Idle IntRef Offset						Sys Type: UTRA FDD	
								1 of 3	

Example for HSPA Subtest 1, and other subtests following table, C11.1.3
(Gain Factors ($\beta_c = 11$ and $\beta_d = 15$))

Call Setup Screen									
Call Control		Active Cell Operating Mode						Serving Grant	
Additional Screens		UE Information INSI: INEI: Power Class:						AG Mode	
Cell Parameters								Single Shot	
Generator Info		UE Expected Open Loop Transmit Power Initial PRACH TX Power: -11.70 dBm Initial DPCCH TX Power: -0.56 dBm						Single Shot AG	
Uplink Parameters								20: (119/15)^2	
UE Rep Meas		Call Processing Status Current Service Type: None MM Status: Index 15: (67/15)^2 GMM State: Index 16: (75/15)^2 Current DPCCH: Index 17: (84/15)^2 HSPA In: Index 18: (95/15)^2 UE Rep E-DCH: Index 19: (106/15)^2 Last Received Throughput: Index 20: (119/15)^2 ACKs Transmitted:						Send Single Shot Absolute Grant	
Trig Output Setup								Send Relative Grant Up	
Sys Frame Clock		Information DPCCH Cat: ---- Ratio: ---- % kbps Transmitted: ----						Send Relative Grant Down	
								Return	
		Active Cell Idle IntRef Offset						Sys Type: UTRA FDD	
2 of 4								1 of 2	

Example: AG – Index = 20 for HSPA subtest 1



Call Setup Screen																																																																																																							
Screen Ctrl	Recorded E-TFCI Information		E-TFCI Record																																																																																																				
Channel (UARFCN) Info	E-TFCI Recording State		E-TFCI Rec Count																																																																																																				
	Idle		15																																																																																																				
HSPA Information	Recorded E-TFCI Values		Start Recording E-TFCI Values																																																																																																				
E-TFCI Recording Information	<table border="1"><tbody><tr><td>1:</td><td>75</td><td>11:</td><td>75</td><td>21:</td><td>----</td><td>31:</td><td>----</td><td>41:</td><td>----</td></tr><tr><td>2:</td><td>75</td><td>12:</td><td>75</td><td>22:</td><td>----</td><td>32:</td><td>----</td><td>42:</td><td>----</td></tr><tr><td>3:</td><td>75</td><td>13:</td><td>75</td><td>23:</td><td>----</td><td>33:</td><td>----</td><td>43:</td><td>----</td></tr><tr><td>4:</td><td>75</td><td>14:</td><td>75</td><td>24:</td><td>----</td><td>34:</td><td>----</td><td>44:</td><td>----</td></tr><tr><td>5:</td><td>75</td><td>15:</td><td>75</td><td>25:</td><td>----</td><td>35:</td><td>----</td><td>45:</td><td>----</td></tr><tr><td>6:</td><td>75</td><td>16:</td><td>----</td><td>26:</td><td>----</td><td>36:</td><td>----</td><td>46:</td><td>----</td></tr><tr><td>7:</td><td>75</td><td>17:</td><td>----</td><td>27:</td><td>----</td><td>37:</td><td>----</td><td>47:</td><td>----</td></tr><tr><td>8:</td><td>75</td><td>18:</td><td>----</td><td>28:</td><td>----</td><td>38:</td><td>----</td><td>48:</td><td>----</td></tr><tr><td>9:</td><td>75</td><td>19:</td><td>----</td><td>29:</td><td>----</td><td>39:</td><td>----</td><td>49:</td><td>----</td></tr><tr><td>10:</td><td>75</td><td>20:</td><td>----</td><td>30:</td><td>----</td><td>40:</td><td>----</td><td>50:</td><td>----</td></tr></tbody></table>		1:	75	11:	75	21:	----	31:	----	41:	----	2:	75	12:	75	22:	----	32:	----	42:	----	3:	75	13:	75	23:	----	33:	----	43:	----	4:	75	14:	75	24:	----	34:	----	44:	----	5:	75	15:	75	25:	----	35:	----	45:	----	6:	75	16:	----	26:	----	36:	----	46:	----	7:	75	17:	----	27:	----	37:	----	47:	----	8:	75	18:	----	28:	----	38:	----	48:	----	9:	75	19:	----	29:	----	39:	----	49:	----	10:	75	20:	----	30:	----	40:	----	50:	----	
1:	75	11:	75	21:	----	31:	----	41:	----																																																																																														
2:	75	12:	75	22:	----	32:	----	42:	----																																																																																														
3:	75	13:	75	23:	----	33:	----	43:	----																																																																																														
4:	75	14:	75	24:	----	34:	----	44:	----																																																																																														
5:	75	15:	75	25:	----	35:	----	45:	----																																																																																														
6:	75	16:	----	26:	----	36:	----	46:	----																																																																																														
7:	75	17:	----	27:	----	37:	----	47:	----																																																																																														
8:	75	18:	----	28:	----	38:	----	48:	----																																																																																														
9:	75	19:	----	29:	----	39:	----	49:	----																																																																																														
10:	75	20:	----	30:	----	40:	----	50:	----																																																																																														
Clear UE Info	15/15		Send Step Up TPC Bit Pattern																																																																																																				
Return			Send Step Down TPC Bit Pattern																																																																																																				
	Background Active Cell Connected Sys Type: UTRA FDD		Return																																																																																																				
	IntRef Offset																																																																																																						

Example: Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1

Reference:

- [1] 941225 D01 SAR test for 3G devices v02, SAR Measurement Procedures for 3G Devices CDMA 2000/Ev-Do/WCDMA/HSDPA/HSPA Oct. 2007 Laboratory Division Office of Engineering and Technology Federal Communications Commission
- [2.] TS 34.121 Universal Mobile Telecommunications System (UMTS); Terminal Conformance Specification, Radio Transmission and Reception (FDD)
- [3.] HSUPA Measurement Guide with 8960 V7.5.0 Release 7 (2007-06) Ver.: v.02.18