

# PEP Testing Laboratory

REPORT NO.: 990186

## RFI / EMI TEST REPORT

**APPLICANT** : SYSGRATION CO., LTD.  
**E. U. T.** : UPS  
**TRADE NAME** : N/A  
**FCC ID** : HQXPC98217-06  
**REGULATION** : CFR 47, Part 15 Subpart B, Class B  
**TEST SITE** : PEP Testing Laboratory  
**TEST ENGINEER** : *Tony Way*  
**TEST DATE** : 6 / 15 / 1999  
**ISSUED DATE** : JUL. / 09 / 1999  
**REPORT No.** : 990186

FEDERAL COMMUNICATIONS COMMISSION  
Laboratory Division  
7435 Oakland Mills Road  
Columbia, MD. 21046

May 25, 1999

PEP Testing Laboratory  
12-3 Fl., No. 27-1, Lane 169  
Kang-Ning St., Hsi-chi Town  
Taipei Hsien  
Taiwan, R.O.C.  
Attention: M. Tsui

Registration Number: 90868


Re: Measurement facility located at Hsi-chi  
3 & 10 meter site  
Date of Listing: May 25, 1999

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that this filing must be updated for any changes made to the facility, and at least every three years from the date of listing the data on file must be certified as current.

If requested, the above mentioned facility has been added to our list of those who perform these measurement services for the public on a fee basis. An up-to-date list of such public test facilities is available on the Internet on the FCC Website at WWW.FCC.GOV, Electronic Filing, OET Equipment Authorization Electronic Filing.

Sincerely,



Thomas W Phillips  
Electronics Engineer

# PEP Testing Laboratory

REPORT NO. : 990186

## VERIFICATION

### WE HEREBY VERIFY THAT:

The E. U. T. listed below has completed RFI testing by PEP Testing Laboratory and the interference emissions can pass FCC Class B limitations.

The tested configurations and the facility complies with the radiated and AC line conducted test site criteria in ANSI C63.4 - 1992.

Any data in this RFI report is "reference" only.

APPLICANT : SYSGRATION CO., LTD.\*  
PRODUCT : UPS\*  
FCC ID : HQXPC98217-06\*  
MODEL : MBK 300\*

M. Y. Tsui  
M. Y. TSUI / Manager

PEP Testing Laboratory  
12-3FL., NO. 27-1, Lane 169, Kang-Ning St.,  
Hsi-Chih, Taipei Hsien, Taiwan, R. O. C.  
TEL: 886-2-26922097 FAX: 886-2-26956236

# PEP Testing Laboratory

REPORT NO. : 990186

## TABLE OF CONTENTS

<b><u>1. GENERAL</u></b>	4
1.1 General Information	
1.2 Place of Measurement	
1.3 Labeling Requirements	
1.4 Information to User	
<b><u>2. CONDUCTED EMISSIONS TEST</u></b>	7
2.1 Setup of the Test Facilities	
2.2 Test Procedures	
<b><u>3. RADIATED EMISSIONS TEST</u></b>	9
3.1 Setup of the Test Facilities	
3.2 Test Procedures	
<b><u>4. DESCRIPTION FOR EUT TESTING CONFIGURATION</u></b>	11
<b><u>5. SUPPORTING DEVICES TO TEST</u></b>	12
<b><u>6. TEST CONFIGURATION</u></b>	15
** Conducted Emission Test Photo. and Data	
** Radiated Emission Test Photo. and Data	
<b><u>7. APPENDIX</u></b>	
A. Photos of EUT Appearance	25
B. List of Test Equipment	26

# PEP Testing Laboratory

REPORT NO. : 990186

## 1. GENERAL

### 1.1 GENERAL INFORMATION:

APPLICANT : SYSGRATION CO., LTD.

8FL., NO. 542-7, CHUNG CHEN RD.,  
HSIN TIEN, TAIPEI, TAIWAN R. O. C.

MANUFACTURER : SYSGRATION CO., LTD. (TAIWAN)  
SYSGRATION(SHENZHEN) LTD. (CHINA)

NO. 26, INDUSTRIAL N RD., NAN-KANG  
INDUSTRIAL PARK, NAN-TOU CITY  
TAIWAN R. O. C.

VILLAGE E GONG-LING, PING-HU TOWN,  
LONG-GONG DISTRICT, SHENZHEN CITY,  
GUANGDONG, PCOPLE REPUBLIC OF CHINA

MEASUREMENT PROCEDURE : ANSI C63,4 - 1992

TESTED FOR COMPLIANCE WITH : Title 47 of CFR  
Part 15, Subpart B, Class B


### 1.2 PLACE OF MEASUREMENT PEP Testing Laboratory

# PEP Testing Laboratory

REPORT NO. : 990186

## 1.3 LABELING REQUIREMENT

A FCC ID label shall be permanently attached and conspicuously located on the equipment :

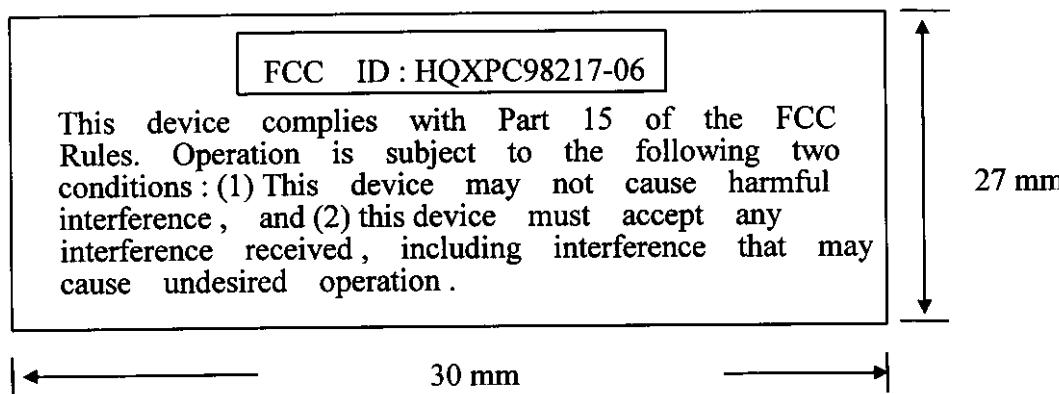

# PEP Testing Laboratory

REPORT NO.: 990186

## 1.4 INFORMATION TO THE USER

The following FCC statement should be declared in a conspicuous location in the user's manual.

### Federal Communications Commission (FCC) Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

Warning : A shielded-type power cord is required in order to meet FCC emission limits and also to prevent interference to the nearby radio and television reception. It is essential that only the supplied power cord be used.

Use only shielded cables to connect I/O devices to this equipment.


You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

# PEP Testing Laboratory

REPORT NO. : 990186

## 2. CONDUCTION EMISSIONS TEST

### 2.1 GENERAL SETUP OF THE TEST FACILITIES

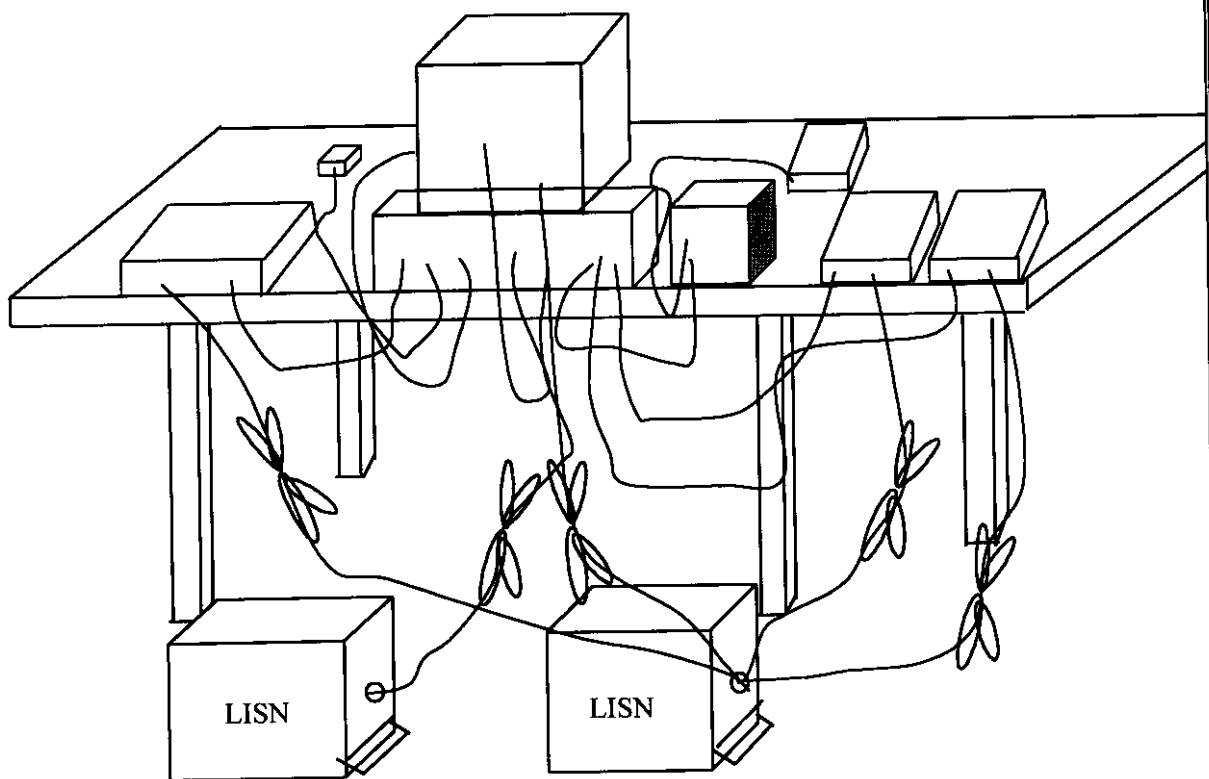

# PEP Testing Laboratory

REPORT NO. : 990186

## 2.2 TEST PROCEDURES

The system was setup as described above, with the EMI diagnostic software.

Both the line of power cord, hot and neutral, were run with the EMI tests software.

To get the maximum power line conducted emission, we changed the configuration by varying the monitor power cord fed from floor outlet and from the outlet on the power supply of this computer.


The highest emissions were recorded in the RFI test report.

# PEP Testing Laboratory

REPORT NO. : 990186

## 3. RADIATED EMISSIONS TEST

### 3.1 GENERAL SETUP OF THE FACILITIES

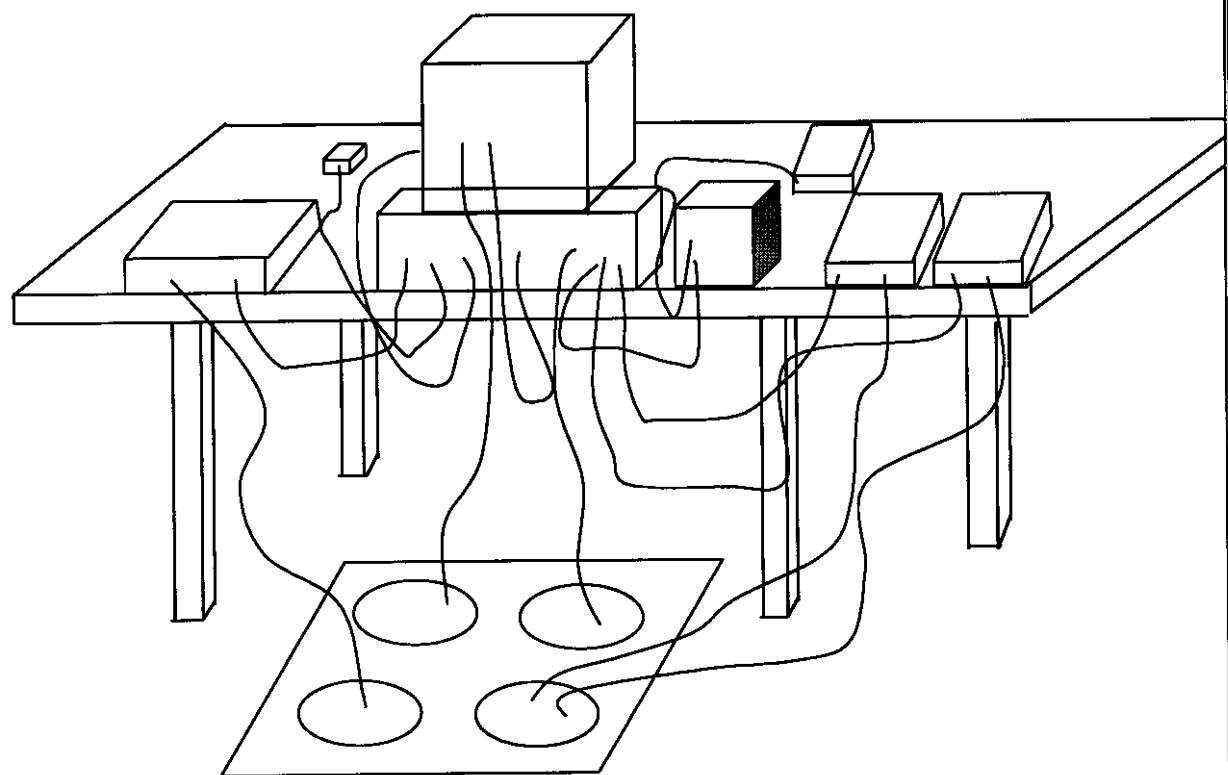

# PEP Testing Laboratory

REPORT NO. : 990186

## 3.2 TEST PROCEDURES

Radiated emissions test was carried out by PEP Testing Laboratory at the open field test site authorized by FCC.

The EUT and supporting equipments were setup with the EMI diagnostic software .

- a. setting up the EUT under normally position , and scanning it from 30 MHz to 1000 MHz , then recording those narrow band noises which cannot be 6 dBuV below lower bound . Both horizontal and vertical antenna are measured from 1 meter height to 4.0 meter height , and turntable rotate 360 degrees .
- b. fixing the EUT rear face to antenna and antenna 1.0 meter height . We adjusted I/O cables to find the highest coupling noise and moved the height of antenna from 1 to 4 meters , then rotated the turntable simultaneously .
- c. checking following step b. all points which were recorded in step a.
- d. changing the peripherals position , and routine steps a. b. c.

The highest emissions were recorded in the RFI test report .

# PEP Testing Laboratory

REPORT NO. : 990186

## 4. DESCRIPTION FOR EUT TESTING CONFIGURATION

### **\*\* TEST PROCESURE ----**

- (A) The equipment under test (EUT) is UPS , FCC ID: HQXPC98217-06 , with three auxiliary power output connectors , two RJ45 jacks and one surge protector outlet , for more detail information about EUT , please refer the user's manual .
- (B) Test method : the EUT was tested with PC system as ANSI C63.4 requirement , the monitor and PC power derived from the EUT ; the rest of power outlet on EUT would be terminated by free-ended power cord ; Line in jacks was terminated by 680 Ohms terminator and Line out jack connected to a telephone set ; surge protect outlet terminated by free-ended cable . Because the EUT provided the power timing too short to perform radiated emission test , we performed (1) radiated emission test--- normal AC power source ; (2) conducted emission test--- normal AC power source and abnormal AC power. The worst case testing result[radiated emission test --- normal AC power source and conducted emission test--- abnormal AC power source ] provided in this report .
- (C) After the EUT was set up , we did the conducted emission test in the shielded room and the worst case placement finding as the ANSI C63.4 requirement ; similarly , the radiated emission test was done at the open field site .
- (D) If the peak value of the noise can't under Non-consumer equipment limit 3 dBuV more , we'll change Biconical antenna or Log-periodic antenna for Dipole antenna and record its Quasi-Peak value , making sure it can under 6 dBuV at least .
- (E) In the RFI test report , we provided the worst conducted emission testing data and radiated emission test data.

# PEP Testing Laboratory

REPORT NO. : 990186

## 5. SUPPORTING DEVICES TO TEST

### **SUPPORT UNIT 1. ---- PERSONAL COMPUTER**

Manufacturer : HEWLETT PACKARD  
Model Number : D3496A  
Power Supply Type : Switching  
Power Cord : Shielded, Detachable, 1.2m  
Data Cable : Shielded, Detachable, 1.2m  
FCC ID : BCJVECTRAVE4

### **SUPPORT UNIT 2. ---- MONITOR**

Manufacturer : MICROSCAN  
Model Number : LM-1564  
Power Supply Type : Switching  
Power Cord : Shielded, Detachable, 1.2m  
Data Cable : Shielded, Undetachable, 1m  
FCC ID : BR8LM-1564

### **SUPPORT UNIT 3. ---- KEYBOARD**

Manufacturer : HEWLETT PACKARD  
Model Number : N/A  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : Shielded, Undetachable, 1m  
FCC ID : CIGE03633

# PEP Testing Laboratory

REPORT NO. : 990186

## **SUPPORT UNIT 4. ---- PRINTER**

Manufacturer : Hewlett-Packard Singapore Pte Ltd.

Model Number : HP400

Power Supply Type : Linear

Power Cord : Non-Shielded, Detachable, 1.2m

Data Cable : Shielded, Detachable, 1m. 2464

FCC ID : B94C2642X

## **SUPPORT UNIT 5. ---- MODEM x 2**

Manufacturer : ACEEX

Model Number : 1414

Power Supply Type : Linear

Power Cord : Non-Shielded, Detachable, 1.2m

Data Cable : Shielded, Detachable, 1m

FCC ID : IFAXDM1414

## **SUPPORT UNIT 6. ---- MOUSE**

Manufacturer : SYSGRATION CO., LTD.

Model Number : AGM5430X

Power Supply Type : N/A

Power Cord : N/A

Data Cable : Shielded, Undetachable, 1m

FCC ID : Declaration of Conformity (DoC)

# PEP Testing Laboratory

REPORT NO. : 990186

## **SUPPORT UNIT 7. ---- TELEPHONE**

Manufacturer : KINGTEL CO., LTD.  
Model Number : KT882T/PM  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : Non-Shielded, Detachable, 1.2m  
FCC ID : N/A

## **EQUIPMENT UNDER TEST ---- UPS**

Manufacturer : SYSGRATION CO., LTD.  
Model Number : MBK 300  
Data Cable : Shielded, Detachable, 1.2m  
FCC ID : HQXPC98217-06

# PEP Testing Laboratory

REPORT NO. : 990186

## 6. TEST CONFIGURATION

Radiated emission detector function :

(1) 30MHZ~1GHZ : Quasi-Peak Value  
Resolution BW : 120KHZ Video BW : 300KHZ

(2) above 1GHZ : Quasi-Peak value and Average Value  
Resolution BW : 1MHZ Video BW : 1MHZ  
\* either Q. P. or average value will be recorded  
in the report

Conducted emission detector function :

(1) 450KHZ~30MHZ : Quasi-Peak Value  
Resolution BW : 9KHZ Video BW : 30KHZ

The else descriptions : N/A

Conducted Emission Test Photo. : Page 16

Test Data : Hot 18, 19  
Neutral 20, 21

Radiated Emission Test Photo. : Page 22

Test Data : Horizontal 23  
Vertical 24

# PEP Testing Laboratory

REPORT NO. 990186

## CONDUCTED EMISSIONS TEST DATA

**Model No.** : MBK 300  
**Frequency range** : 150KHz to 30MHz  
**Detector** : Quasi-peak Value  
**Temperature** : 29 °C  
**Humidity** : 62 %

**Test Data :** # 810 < LINE >  
# 815 < NEUTRAL >

※ Note 1. Level = Meter read + Cable Loss + LISN Factor  
2. Margin = Level - Limit  
3. LISN = AMN




**PEP**

PEP Testing Laboratory

12-3FL., NO.27-1, LANE 169, KANG NING, ST.,  
HSI-CHI, TAIPEI HSIEN, TAIWAN, R.O.C.  
TEL:886-2-6922097 FAX:886-2-6956236

Data#: 810 File#: cispr22b.EMI

Date: 1999-06-23 Time: 11:31:43

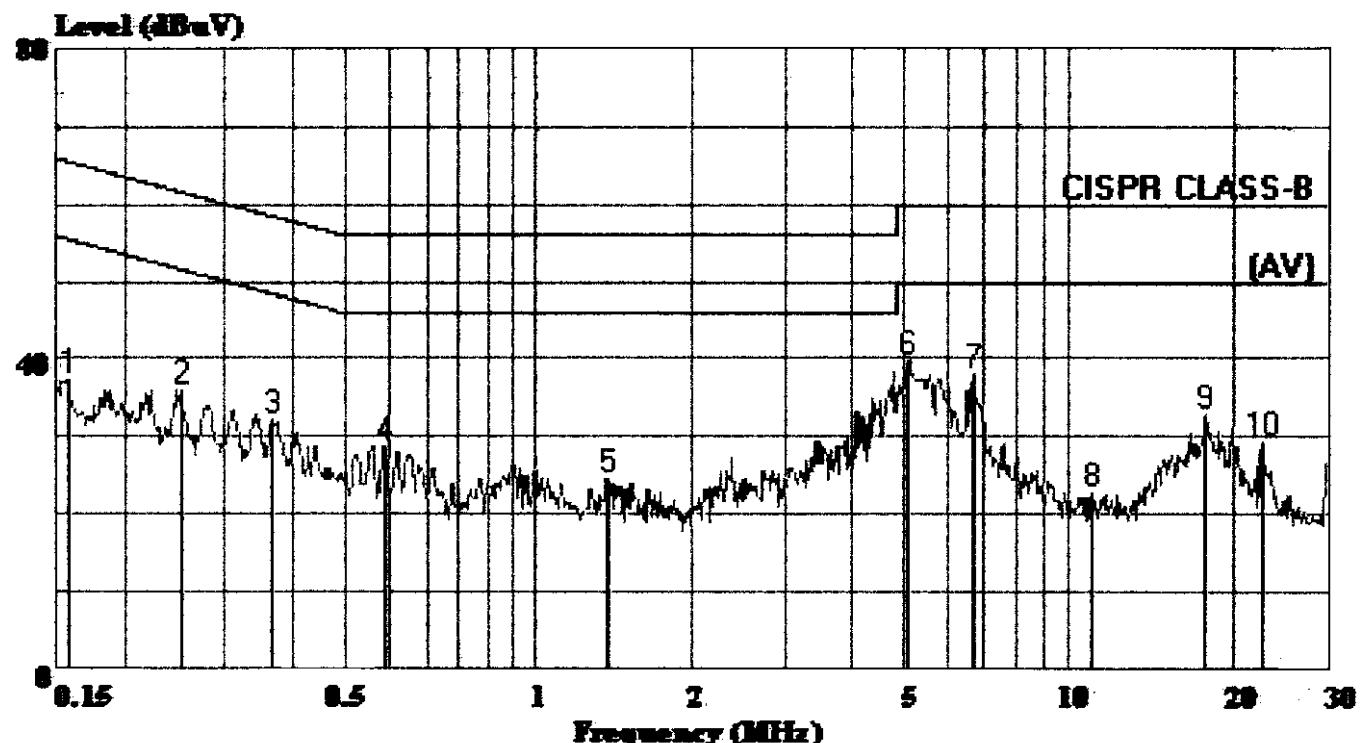

**PEP Testing Laboratory (EMI 4:JEFF)**

Trace: 809

Ref Trace:

Condition: CISPR CLASS-B LISN.L LINE

EUT : MBK 300

Power: AC 115V/60Hz

Memo : Quasi Peak Value

# PEP Testing Laboratory

Date of test: 6/23/1999

Data # : 810

EUT Model No: MBK 300

Phase : LINE

Detector : Q.P.

Frequency (MHz)	LISN Factor (dB)	Cable Loss (dB)	Meter read (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dBuV)
0.158	0.73	0.72	35.80	37.25	65.56	-28.31
0.253	0.73	0.81	34.60	36.14	61.64	-25.50
0.369	0.73	0.90	30.60	32.23	58.52	-26.29
0.595	0.73	0.90	27.00	28.63	56.00	-27.37
1.495	0.71	0.96	23.00	24.67	56.00	-31.33
5.194	0.68	1.00	38.20	39.88	60.00	-20.12
6.841	0.67	1.00	36.60	38.27	60.00	-21.73
11.198	0.65	0.80	21.40	22.85	60.00	-37.15
17.944	0.63	0.80	31.60	33.03	60.00	-26.97
22.775	0.62	0.90	27.80	29.32	60.00	-30.68

Note: LISN Factor means LISN insertion loss .




PEP Testing Laboratory

12-3FL., NO.27-1, LANE 169, KANG NING, ST.,  
HSI-CHI, TAIPEI HSIEN, TAIWAN, R.O.C.  
TEL:886-2-6922097 FAX:886-2-6956236

Data#: 815 File#: cispr22b.EMI

Date: 1999-06-23 Time: 11:34:55

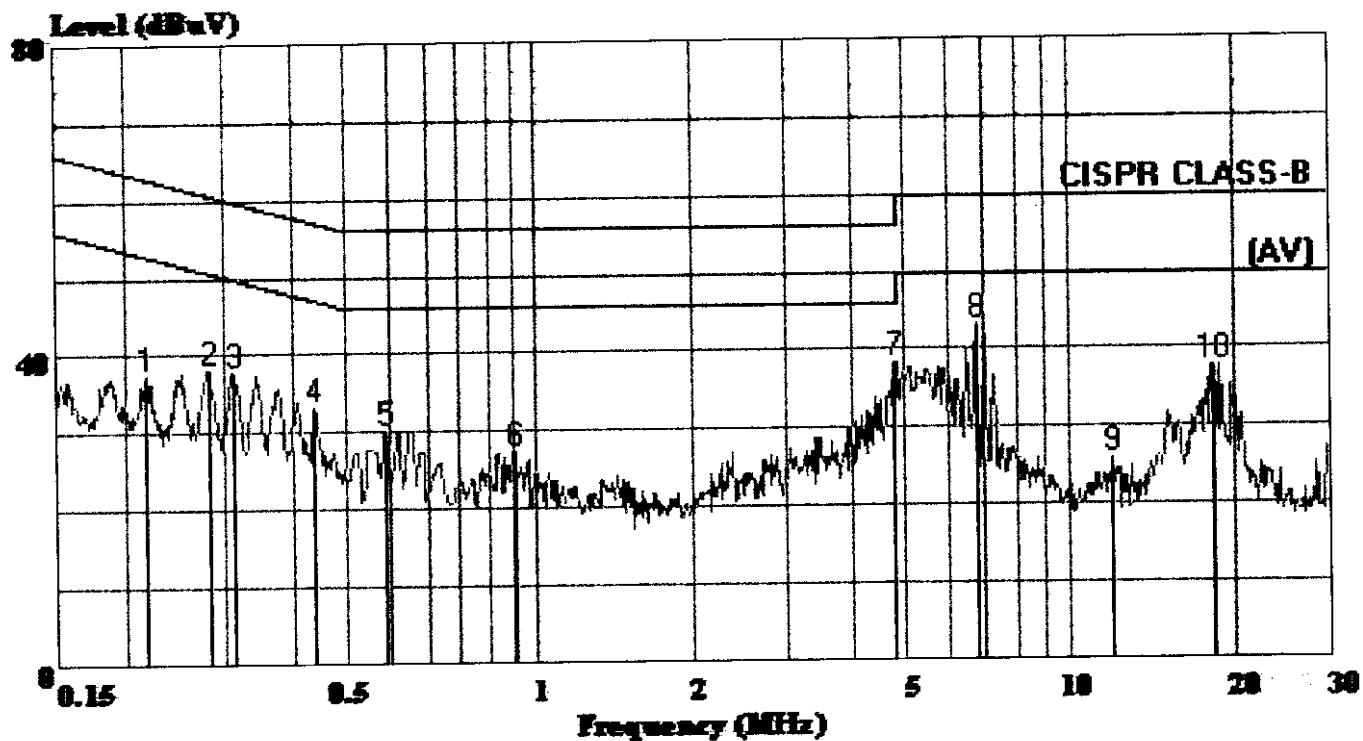

PEP Testing Laboratory (EMI 4:JEFF)

Trace: 814

Ref Trace:

Condition: CISPR CLASS-B LISN.N NEUTRAL

EUT : MBK 300

Power: AC 115V/60Hz

Memo : Quasi Peak Value

# PEP Testing Laboratory

Date of test: 6/23/1999

Data # : 815

EUT Model No: MBK 300

Phase : NEUTRAL

Detector : Q.P.

Frequency (MHz)	LISN Factor (dB)	Cable Loss (dB)	Meter read (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dBuV)
0.219	0.73	0.80	36.00	37.53	62.88	-25.35
0.283	0.73	0.87	36.60	38.20	60.72	-22.52
0.315	0.73	0.90	36.20	37.83	59.84	-22.01
0.440	0.73	0.90	31.60	33.23	57.07	-23.84
0.595	0.73	0.90	28.60	30.23	56.00	-25.77
1.010	0.72	0.90	25.60	27.22	56.00	-28.78
4.926	0.67	1.00	36.80	38.47	56.00	-17.53
6.914	0.65	1.00	41.80	43.45	60.00	-16.55
12.188	0.62	0.80	24.60	26.02	60.00	-33.98
18.622	0.62	0.80	36.40	37.82	60.00	-22.18

Note: LISN Factor means LISN insertion loss .

# PEP Testing Laboratory

REPORT NO. : 990186

## RADIATED EMISSIONS TEST DATA

Antenna polarization : HORIZONTAL; Test distance : 10 m;

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Azimuth (° angle)	Antenna High(m)
31.00	21.32	- 8.68	30.00	26.80	13.73	0.78	20.00	183.2	3.9
149.55	22.31	- 7.69	30.00	28.03	12.39	1.89	20.00	261.3	4.0
155.10	15.03	-14.97	30.00	20.53	12.50	2.00	20.00	172.1	4.0
182.55	16.32	-13.68	30.00	20.36	13.75	2.21	20.00	159.3	3.8
193.55	22.31	- 7.69	30.00	25.68	14.36	2.27	20.00	241.2	3.9
232.45	22.68	-14.32	37.00	24.13	15.99	2.56	20.00	168.2	4.0
270.99	16.01	-20.99	37.00	15.03	18.08	2.91	20.00	19.2	3.8
616.01	16.24	-20.76	37.00	13.71	18.91	3.62	20.00	38.4	3.7
752.87	19.32	-17.68	37.00	14.30	20.95	4.07	20.00	41.2	3.7
882.39	21.07	-15.93	37.00	12.44	24.23	4.40	20.00	166.2	3.6

Note :

1. Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line

# PEP Testing Laboratory

REPORT NO. : 990186

## RADIATED EMISSIONS TEST DATA

Antenna polarization : VERTICAL; Test distance : 10 m;

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit (dB)	Line (dB)	Read (dB)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Azimuth (° angle)	Antenna High(m)
31.00	21.35	- 8.65	30.00	26.83	13.73	0.78	20.00	215.9	1.2	
149.55	16.37	-13.63	30.00	22.09	12.39	1.89	20.00	131.2	1.1	
155.10	18.23	-11.77	30.00	23.73	12.50	2.00	20.00	165.4	1.0	
193.55	20.16	- 9.84	30.00	23.53	14.36	2.27	20.00	269.3	1.2	
232.45	17.32	-19.68	37.00	18.77	15.99	2.56	20.00	177.2	1.1	
270.99	15.95	-21.05	37.00	14.97	18.08	2.91	20.00	124.5	1.0	
494.43	17.03	-19.97	37.00	16.68	17.18	3.18	20.00	93.8	1.2	
671.96	20.98	-16.02	37.00	17.10	20.21	3.67	20.00	21.5	1.0	
819.18	21.01	-15.99	37.00	14.05	22.56	4.40	20.00	316.2	1.0	
958.38	23.54	-13.46	37.00	14.09	24.70	4.75	20.00	261.1	1.1	

Note :

1. Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line

# PEP Testing Laboratory

REPORT NO. : 990186

## APPENDIX B. List of Test Equipment

Instrument	Model No.	Cal. Due Date	S/N
R&S Receiver	ESVS30(30M~1GHZ)	Apr. 15, 2000	863342/012
R&S Receiver	ESBI (20~5GHZ)	Apr. 15, 2000	845658/003
Spectrum Analyzer	HP8591A(9K~1.8GHZ)	Apr. 15, 2000	3225A03039
Spectrum Analyzer	R3261A (9K~2.6GHZ)	Apr. 15, 2000	91720076
EMCO L.I.S.N.	3825/2 (10K~30MHZ)	Apr. 15, 2000	9311-2150
Anritsu Pre-Amp.	MH648A(100K~1.4GHZ)	Sep. 20, 1999	M40076
COM-Power Horn	AH-118 (1G~18GHZ) Antenna		10056
EMCO Dipole	3121C (20M~1GHZ) Antenna	May. 22, 2000	9611-1230
EMCO Biconical	3110B (30M~300M) Antenna	Mar. 10, 2000	2932
EMCO Log-Periodic	3146A (300M~1GHZ) Antenna	Apr. 14, 2000	1384