



W66 N220 Commerce Court • Cedarburg, WI 53012

Phone: 262.375.4400 • Fax: 262.375.4248

www.lsr.com

TEST REPORT # 311067 Tx
LSR Job #: C-1156

Compliance Testing of:

Antenna Module

Test Date(s):

June 1st – 15th 2011

Prepared For:

Honeywell.

1985 Douglas Drive North,
Golden Valley, MN 55422

In accordance with:
Federal Communications Commission (FCC)
Part 15, Subpart C, Section 15.247
Industry Canada (IC) RSS 210 Annex 8
Frequency Hopping Spread Spectrum (FHSS) Operating in the
Frequency Band 902 MHz – 928 MHz

This Test Report is issued under the Authority of:
Thomas T. Smith, Manager EMC Test Services

Signature: *Thomas T. Smith*

Date: 6/25/2011

Test Report Reviewed by:
Ryan M. Urness, EMC Laboratory Manager

Signature: *R. Urness* Date: 06.23.11

Project Engineer:
Khairul Aidi Zainal, Senior EMC Engineer.

Signature: *Khairul Aidi Zainal* Date: 06.24.11

This Test Report may not be reproduced, except in full, without written approval of LS Research, LLC.

TABLE OF CONTENTS

EXHIBIT 1. INTRODUCTION	4
1.1 - Scope.....	4
1.2 – Normative References	4
1.3 - LS Research, LLC Test Facility	5
1.4 – Location of Testing.....	5
1.5 – Test Equipment Utilized	5
EXHIBIT 2. PERFORMANCE ASSESSMENT	6
2.1 – Client Information	6
2.2 - Equipment Under Test (EUT) Information	6
2.3 - Associated Antenna Description	6
2.4 - EUT’S Technical Specifications	7
2.5 - Product Description.....	8
EXHIBIT 3. EUT OPERATING CONDITIONS & CONFIGURATIONS DURING TESTS	9
3.1 - Climate Test Conditions.....	9
3.2 - Applicability & Summary Of EMC Emission Test Results.....	9
3.3 - Modifications Incorporated In The EUT For Compliance Purposes.....	10
3.4 - Deviations & Exclusions From Test Specifications	10
EXHIBIT 4. DECLARATION OF CONFORMITY	11
EXHIBIT 5. RADIATED EMISSIONS TEST.....	12
5.1 - Test Setup.....	12
5.2 - Test Procedure	12
5.3 - Test Equipment Utilized	13
5.4 - Test Results	13
5.5 - Calculation of Radiated Emissions Limits and reported data.....	14
5.6 - Radiated Emissions Test Data Chart.....	15
5.7 - Test Setup Photo(s) – Radiated Emissions Test	19
EXHIBIT 6. CONDUCTED EMISSIONS TEST, AC POWER LINE	20
6.1 Test Setup.....	20
6.2 Test Procedure	20
6.3 Test Equipment Utilized	20
6.4 Test Results	20
EXHIBIT 7. OCCUPIED BANDWIDTH	25

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 2 of 48

7.1 - Limits.....	25
7.2 - Method of Measurements	25
7.3 - Test Data	25
EXHIBIT 8. BAND EDGE MEASUREMENTS	26
8.1 - Method of Measurements	26
8.2. Band edge captures.....	27
EXHIBIT 9. POWER OUTPUT (CONDUCTED): 15.247(b).....	28
9.1 - Method of Measurements	28
9.2 - Test Data	28
EXHIBIT 10. CONDUCTED SPURIOUS EMISSIONS: 15.247(d).....	29
10.1 - Limits.....	29
10.2 – Conducted Harmonic And Spurious RF Measurements	29
10.3 - Test Data	30
10.4 – Screen Captures – Spurious Radiated Emissions	31
EXHIBIT 11. FREQUENCY & POWER STABILITY OVER VOLTAGE VARIATIONS.....	33
EXHIBIT 12. CHANNEL PLAN AND SEPARATION.....	34
12.1 - Screen Captures – Channel Separation	34
EXHIBIT 13. CHANNEL OCCUPANCY.....	36
13.1 Time occupancy captures.	36
EXHIBIT 14. EQUAL CHANNEL USAGE	38
EXHIBIT 15. PSEUDORANDOM HOPPING SEQUENCE.....	39
EXHIBIT 16. RECEIVER SYNCHRONIZATION AND INPUT BANDWIDTH.....	40
EXHIBIT 17. MPE CALCULATIONS	41
APPENDIX A – Test Equipment List.....	42
APPENDIX B – Test Standards: CURRENT PUBLICATION DATES RADIO	44
APPENDIX C - Uncertainty Statement.....	45
APPENDIX D – EUT firmware instructions.	46

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 3 of 48

EXHIBIT 1. INTRODUCTION

1.1 - Scope

References:	FCC Part 15, Subpart C, Section 15.247 RSS GEN issue 3 and RSS 210 issue 8 Annex 8
Title:	FCC : Telecommunication – Code of Federal Regulations, CFR 47, Part 15. IC : Low-power License-exempt Radio-communication Devices (All Frequency Bands): Category I Equipment
Purpose of Test:	To gain FCC and IC Certification Authorization for Low-Power License-Exempt Transmitters.
Test Procedures:	Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
Environmental Classification:	Commercial, Industrial or Business Residential

1.2 – Normative References

Publication	Year	Title
47 CFR, Parts 0-15 (FCC)	2010-10	Code of Federal Regulations - Telecommunications
RSS 210 Issue 8 Annex 8	2010-12	Low-power License-exempt Radio-communication Devices (All Frequency Bands): Category I Equipment
ANSI C63.4	2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
CISPR 16-1-1	2006-03 A1: 2006-09 A2: 2007-07	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-1: Measuring Apparatus.
FCC ET Docket No. 99-231	2002	Amendment to FCC Part 15 of the Commission's Rules Regarding Spread Spectrum Devices.
FCC Public Notice DA 00-705	2000	Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 4 of 48

1.3 - LS Research, LLC Test Facility

LS Research, LLC is accredited by A2LA (American Association for Laboratory Accreditation) as conforming to ISO/IEC 17025, 2005 "General Requirements for the Competence of Calibration and Testing Laboratories".

LS Research, LLC's scope of accreditation includes all test methods listed herein, unless otherwise noted. Accreditation status can be verified at A2LA's web site: www.a2la.net.

1.4 - Location of Testing

All testing was performed at the following location utilizing the facilities listed below, unless otherwise noted.

LS Research, LLC
W66 N220 Commerce Court
Cedarburg, Wisconsin, 53012 USA,

List of Facilities Located at LS Research, LLC:

Compact Chamber
Semi-Anechoic Chamber
Open Area Test Site (OATS)

1.5 - Test Equipment Utilized

A complete list of equipment utilized in testing is provided in Appendix A of this test report. Calibration dates are indicated in Appendix A. All test equipment is calibrated by a calibration laboratory accredited to the requirements of ISO/IEC 17025, and traceable to the SI standard.

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 5 of 48

EXHIBIT 2. PERFORMANCE ASSESSMENT

2.1 – Client Information

Manufacturer Name:	Honeywell
Address:	1985 Douglas Drive, Golden Valley, MN 55422
Contact Name:	Martin Plouffe

2.2 - Equipment Under Test (EUT) Information

The following information has been supplied by the applicant.

Product Name:	Antenna Module
Model Number:	50052669-001
Serial Number:	Engineering Sample

2.3 - Associated Antenna Description

The antenna associated with the device is a ceramic chip antenna from Johanson Technology.

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 6 of 48

2.4 - EUT'S Technical Specifications

EUT Frequency Range (in MHz)	903.0 MHz – 926.4 MHz
RF Power in Watts (Conducted measurement)	
Minimum:	0.0123 Watts
Maximum:	0.0132 Watts
Max Conducted Output Power (in dBm)	11.2 dBm
Field Strength at 3 meters (Maximum)	103.5 dBμV/m (926.4 Mhz antenna B)
Occupied Bandwidth (99% BW)	64.13kHz
Type of Modulation	FSK
Emission Designator	64K1F1D
EIRP (P _{out} + G _{ant})	10.47mW
Transmitter Spurious (worst case) at 3 meters	53.2dBμV/m at 5418MHz
Stepped (Y/N)	N
Step Value:	
Frequency Tolerance %, Hz, ppm	Better than 100 ppm
Microprocessor Model # (if applicable)	TI CC1101
Antenna Information	
Detachable/non-detachable	Non-detacheable
Type	Ceramic chip
Gain (From data sheet)	Peak = -1.0 dBi
EUT will be operated under FCC Rule Part(s)	Title 47 part 15.247
EUT will be operated under RSS Rule Part(s)	RSS 210
Modular Filing	☐ Yes ☒ No
Portable or Mobile?	Mobile

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 7 of 48

RF Technical Information:

Type of Evaluation (check one)		SAR Evaluation: Device Used in the Vicinity of the Human Head
		SAR Evaluation: Body-worn Device
	X	RF Evaluation

If RF Evaluation checked above, test engineer to complete the following:

Evaluated against exposure limits: ☒ General Public Use ☐ Controlled Use

Duty Cycle used in evaluation: 100 %

Standard used for evaluation: OET 65

Measurement Distance: 20 cm

RF Value: 0.02083 ☐ V/m ☐ A/m ☒ W/m²
☐ Measured ☐ Computed ☒ Calculated

2.5 - Product Description

The Antenna Module, Thermostat, and Relay Module comprise a 3 component system. The thermostat monitors temperature and wirelessly sends commands to the Antenna Module. In turn, the antenna module sends another signal (wired) to the relay module which then turns on an electric baseboard heater. The thermostat will be typically mounted to a wall. The antenna module is typically mounted to an electric baseboard heater.

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 8 of 48

EXHIBIT 3. EUT OPERATING CONDITIONS & CONFIGURATIONS DURING TESTS

3.1 - Climate Test Conditions

Temperature:	71 ° F
Humidity:	34 %
Pressure:	741 mmHg

3.2 - Applicability & Summary Of EMC Emission Test Results

FCC and IC Paragraph	Test Requirements	Compliance (Yes/No)
FCC : 15.207 IC : RSS GEN sect. 7.2.2	Power Line Conducted Emissions Measurements	Yes
FCC : 15.247 (a)(1) IC : RSS 210 A8.1 (a)	20 dB Bandwidth	Yes
FCC : 15.247(b) & 1.1310 IC : RSS 210 A8.4	Maximum Output Power	Yes
FCC : 15.247(i), 1.1307, 1.1310, 2.1091 & 2.1093 IC : RSS 102	RF Exposure Limit	Yes
FCC :15.247(d) IC : RSS 210 A8.5	RF Conducted Spurious Emissions at the Transmitter Antenna Terminal	Yes
FCC:15.247 (a)(1)(i)(iii) IC: RSS 210 (b)	Carrier Frequency Separation	
FCC:15.247 (a)(1)(i),(ii),(iii) IC: RSS 210 (c),(d),(e)	Number of hopping channels	Yes
FCC:15.247 (a)(1)(i),(ii),(iii) IC: RSS 210 (c),(d),(e)	Time of occupancy (Dwell Time)	Yes
FCC : 15.247(b) IC : RSS 210 A8.2(b), section 2.2, 2.6 and 2.7	Transmitter Radiated Emissions	Yes
The digital circuit portion of the EUT has been tested and verified to comply with FCC Part 15, Subpart B, Class B Digital Devices (RSS GEN and RSS 210 of IC) and the associated Radio Receiver has also been tested and found to comply with Part 15, Subpart B – Radio Receivers (RSS GEN and RSS 210 of IC). The Receiver Test Report is available upon request.		

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 9 of 48

3.3 - Modifications Incorporated In The EUT For Compliance Purposes

☒ None

☐ Yes (explain below)

3.4 - Deviations & Exclusions From Test Specifications

☒ None

☐ Yes (explain below)

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 10 of 48

EXHIBIT 4. DECLARATION OF CONFORMITY

The EUT was found to MEET the requirements as described within the specification of FCC Title 47, CFR Part 15.247, and Industry Canada RSS-210, Issue 8 (2010), Annex 8 (section 8.1).

Note: If some emissions are seen to be within 3 dB of their respective limits; as these levels are within the tolerances of the test equipment and site employed, there is a possibility that this unit, or a similar unit selected out of production may not meet the required limit specification if tested by another agency.

LS Research, LLC certifies that the data contained herein was taken under conditions that meet or exceed the requirements of the test specifications. The results in this Test Report apply only to the item(s) tested on the above-specified dates. Any modifications made to the EUT subsequent to the indicated test date(s) will invalidate the data herein, and void this certification.

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 11 of 48

EXHIBIT 5. RADIATED EMISSIONS TEST

5.1 - Test Setup

The test setup was assembled in accordance with Title 47, CFR FCC Part 15, RSS GEN and ANSI C63.4-2003. The EUT was placed on an 80cm high non-conductive pedestal, centered on a flush mounted 2-meter diameter turntable inside a 3 meter Semi-Anechoic, FCC listed Chamber. The EUT was operated in continuous transmit mode for final testing using power as provided by 120 VAC. The unit has the capability to operate on 3 channels, controllable via a button on the the EUT.

The applicable limits apply at a 3 meter distance. The calculations to determine these limits are detailed in the following pages. Please refer to Appendix A for a complete list of test equipment. The test sample was operated on one of three (3) standard channels: low (903MHz), middle (914.6MHz) and high (926.4MHz) to comply with FCC Part 15.31(m). The channels and operating modes were changed via a single button on the EUT.

5.2 - Test Procedure

Radiated RF measurements were performed on the EUT in a 3 meter Semi-Anechoic, FCC listed Chamber. The frequency range from 30 MHz to 10000 MHz was scanned and investigated. The radiated RF emission levels were manually noted at the various fixed degree settings of azimuth on the turntable and antenna height. The EUT was placed on a non-conductive pedestal in the 3 meter Semi-Anechoic Chamber, with the antenna mast placed such that the antenna was 3 meters from the EUT. A Biconical Antenna was used to measure emissions from 30 MHz to 300 MHz, and a Log Periodic Antenna was used to measure emissions from 300 MHz to 1000 MHz. A Double-Ridged Waveguide Horn Antenna was used from 1 GHz to 10 GHz. The maximum radiated RF emissions between 30MHz to 4 GHz were found by raising and lowering the sense antenna between 1 and 4 meters in height, using both horizontal and vertical antenna polarities. Between 5GHz to 10GHz, the sense antenna was raised and lowered between 1 and 1.8 meters in height.

The EUT was positioned in its intended orientation.

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 12 of 48

5.3 - Test Equipment Utilized

A list of the test equipment and antennas utilized for the Radiated Emissions test can be found in Appendix A. This list includes calibration information and equipment descriptions. All equipment is calibrated and used according to the operation manuals supplied by the manufacturers. All calibrations of the antennas used were performed at a calibration laboratory accredited to ISO 17025, and are traceable to the SI standard. In addition, the Connecting Cables were measured for losses using a calibrated Signal Generator and an EMI Receiver. The resulting correction factors and the cable loss factors from these calibrations were entered into the EMI Receiver database. As a result, the data taken from the EMI Receiver accounts for the antenna correction factor as well as cable loss or other corrections, and can therefore be entered into the database as a corrected meter reading. The EMI Receiver was operated with a resolution bandwidth of 120 kHz for measurements below 1 GHz (video bandwidth of 300 kHz), and a bandwidth of 1 MHz for measurements above 1 GHz (video bandwidth of 1 MHz). From 5 GHz to 10 GHz, a Spectrum Analyzer and an EMCO Horn Antenna were used.

5.4 - Test Results

The EUT was found to **MEET** the Radiated Emissions requirements of Title 47 CFR, FCC Part 15.247 and Canada RSS-210, Issue 8 (2010), Annex 8 for an FHSS transmitter. The frequencies with significant RF signal strength were recorded and plotted as shown in the Data Charts and Graphs.

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 13 of 48

5.5 - Calculation of Radiated Emissions Limits and reported data.

Reported data:

For both fundamental and spurious emissions measurement, the data reported includes all necessary correction factors. These correction factors are loaded onto the EMI receiver when measurements are performed.

Reported Measurement data = Raw receiver measurement (dB μ V/m) + Antenna correction Factor + Cable factor (dB) + Miscellaneous factors when applicable (dB) – amplification factor when applicable (dB).

Generic example of reported data at 200 MHz:

Reported Measurement data = 18.2 (raw receiver measurement) + 15.8 (antenna factor) + 1.45 (cable factor) = 35.45 (dB μ V/m).

As specified in 15.247 (d) and RSS 210 A8.5, radiated emissions that fall within the restricted band described in 15.205(c) for FCC and section 2.2 of RSS 210 for IC, must comply with the general emissions limit.

The following table depicts the general radiated emission limits above 30 MHz. These limits are obtained from Title 47 CFR, Part 15.209, for radiated emissions measurements. These limits were applied to any signals found in the 15.205 restricted bands. The mentioned limits correspond to those limits listed in RSS GEN.

Frequency (MHz)	3 m Limit μ V/m	3 m Limit (dB μ V/m)	1 m Limit (dB μ V/m)
30-88	100	40.0	-
88-216	150	43.5	-
216-960	200	46.0	-
960-24,000	500	54.0	63.5

Sample conversion of field strength (μ V/m to dB μ V/m):

$\text{dB}\mu\text{V/m} = 20 \log_{10} (100) = 40 \text{ dB}\mu\text{V/m}$ (from 30-88 MHz)

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 14 of 48

5.6 - Radiated Emissions Test Data Chart

Manufacturer:	Honeywell						
Date(s) of Test:	June 1 st – 15 th 2011						
Project Engineer(s):	Khairul Aidi Zainal						
Test Engineer(s):	Khairul Aidi Zainal						
Voltage:	120 VAC						
Operation Mode:	continuous transmit, modulated						
Environmental Conditions in the Lab:	Temperature: 71° F Relative Humidity: 34 %						
EUT Power:	X	Single Phase 120VAC			3 Phase ____ VAC		
		Battery			Other: Bench DC supply		
EUT Placement:	X	80cm non-conductive pedestal			10cm Spacers		
EUT Test Location:	X	3 Meter Semi-Anechoic FCC Listed Chamber			3/10m OATS		
Measurements:		Pre-Compliance			Preliminary	X	Final
Detectors Used:	X	Peak		X	Quasi-Peak	X	Average

The following table depicts the level radiated Fundamental Emission:

FREQ (MHz)	ANT	EUT	HEIGHT (m)	AZIMUTH (°)	Q.PEAK (dBμv/m)	Q.PEAK (mv/m)	LIMIT (dBμv/m)	MARGIN (dB)	EUT ANTENNA
903.00	H	TT	1.00	116	102.7	136.5	131.2	28.5	A
914.60	H	TT	1.00	117	101.8	123.0	131.2	29.4	A
926.40	H	TT	1.00	120	102.8	138.0	131.2	28.4	A
903.00	V	TT	1.00	255	99.8	97.7	131.2	31.4	B
914.60	H	TT	1.00	116	101.6	120.2	131.2	29.6	B
926.40	H	TT	1.00	114	103.5	149.6	131.2	27.7	B

Notes:

1. H: Horizontal, V: Vertical, TT: Table Top.
2. Refer to exhibit 5.5 on explanation of how data is reported.

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 15 of 48

RADIATED EMISSIONS DATA CHART (continued)

The following table depicts the level of significant radiated **harmonic** emissions of channel 903.0 MHz in the restricted band:

FREQ (MHz)	ANT	EUT	HEIGHT (cm)	AZIMUTH (°)	PEAK (dBμV/m)	AVERAGE (dBμV/m)	LIMIT (dBμV/m)	MARGIN (dB)	EUT ANT	NOTES
2709.00	H	TT	1.00	0	45.9	33.4	54.0	20.6	A	4
2709.00	H	TT	1.00	0	45.9	33.4	54.0	20.6	B	4
3612.00	V	TT	1.00	0	48.8	36.4	54.0	17.6	A	4
3612.00	V	TT	1.00	0	48.8	36.4	54.0	17.6	B	4
4515.00	H	TT	1.00	0	51.6	38.5	54.0	15.5	A	4
4515.00	H	TT	1.00	0	51.6	38.5	54.0	15.5	B	4
5418.00	H	TT	1.00	259	53.9	53.2	54.0	0.8	A	
5418.00	H	TT	1.00	259	53.8	53.1	54.0	0.9	B	
8127.00	V	TT	1.00	183	46.1	36.2	54.0	17.8	A	
8127.00	V	TT	1.00	180	47.2	36.9	54.0	17.1	B	
9030.00	V	TT	1.79	283	49.9	44.1	54.0	9.9	A	
9030.00	V	TT	1.37	271	51.4	47.3	54.0	6.7	B	

Notes:

- Measurements above 4 GHz were made at 1 meters of separation from the EUT. The limits were adjusted to reflect this measurement distance.
- H: Horizontal, V: Vertical, TT: Table Top.
- Refer to exhibit 5.5 on explanation of how data is reported.
- Measurement is that of the system noise floor

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 16 of 48

The following table depicts the level of significant radiated **harmonic** emissions of channel 914.6 MHz in the restricted band:

FREQ (MHz)	ANT	EUT	HEIGHT (m)	AZIMUTH (°)	PEAK (dBμV/m)	AVERAGE (dBμV/m)	LIMIT (dBμV/m)	MARGIN (dB)	ANT	NOTES
2743.80	H	TT	1.00	0	45.6	32.9	54.0	21.1	A	4
2743.80	H	TT	1.00	0	45.6	32.9	54.0	21.1	B	4
								0.0		
3658.40	V	TT	1.00	0	49.2	36.5	54.0	17.5	A	4
3658.40	V	TT	1.00	0	49.2	36.5	54.0	17.5	B	4
								0.0		
4573.00	H	TT	1.00	0	50.6	38.4	54.0	15.6	A	4
4573.00	H	TT	1.00	0	50.6	38.4	54.0	15.6	B	4
7316.80	H	TT	1.66	194	46.6	36.1	54.0	17.9	A	
7316.80	V	TT	1.02	286	47.6	42.0	54.0	12.0	B	
8231.40	V	TT	1.00	174	46.5	36.4	54.0	17.6	A	
8231.40	V	TT	1.00	177	46.0	36.6	54.0	17.4	B	
9146.00	V	TT	1.11	276	49.4	42.6	54.0	11.4	A	
9146.00	V	TT	1.45	272	52.3	48.6	54.0	5.4	B	

Notes:

1. Measurements above 4 GHz were made at 1 meters of separation from the EUT. The limits were adjusted to reflect this measurement distance.
2. H: Horizontal, V: Vertical, TT: Table Top.
3. Refer to exhibit 5.5 on explanation of how data is reported.
4. Measurement is that of the system noise floor

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 17 of 48

The following table depicts the level of significant radiated **harmonic** emissions of channel 926.4 MHz in the restricted band:


FREQ (MHz)	ANT	EUT	HEIGHT (m)	AZIMUTH (°)	PEAK (dBμv/m)	AVERAGE (dBμv/m)	LIMIT (dBμv/m)	MARGIN (dB)	ANT	NOTES
2779.20	H	TT	1.00	0	45.7	33.2	54.0	20.8	A	4
2779.20	H	TT	1.00	0	45.7	33.2	54.0	20.8	B	4
3705.60	V	TT	1.00	0	49.3	36.7	54.0	17.3	A	4
3705.60	V	TT	1.00	0	49.3	36.7	54.0	17.3	B	4
4632.00	H	TT	1.00	0	51.4	38.5	54.0	15.5	A	4
4632.00	H	TT	1.00	0	51.4	38.5	54.0	15.5	B	4
7411.20	V	TT	1.00	278	47.5	39.5	54.0	14.5	A	
7411.20	V	TT	1.00	273	46.8	38.0	54.0	16.0	B	
8337.60	V	TT	1.00	171	47.0	36.7	54.0	17.3	A	
8337.60	V	TT	1.00	176	47.5	37.3	54.0	16.7	B	

Notes:


1. Measurements above 4 GHz were made at 1 meters of separation from the EUT. The limits were adjusted to reflect this measurement distance.
2. H: Horizontal, V: Vertical, TT: Table Top.
3. Refer to exhibit 5.5 on explanation of how data is reported.
4. Measurement is that of the system noise floor

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 18 of 48

5.7 - Test Setup Photo(s) – Radiated Emissions Test

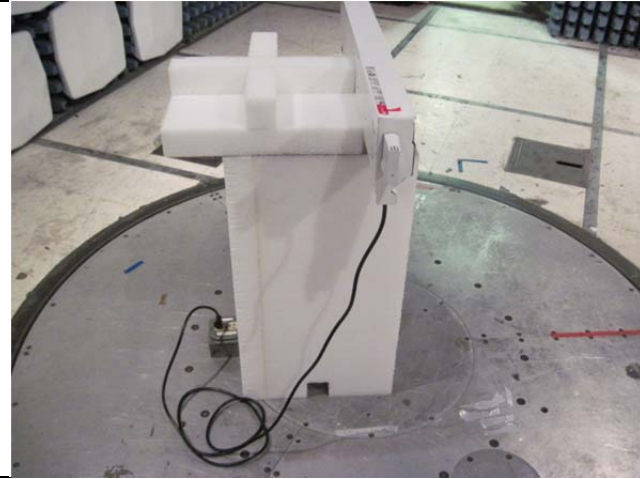


EUT on test pedestal

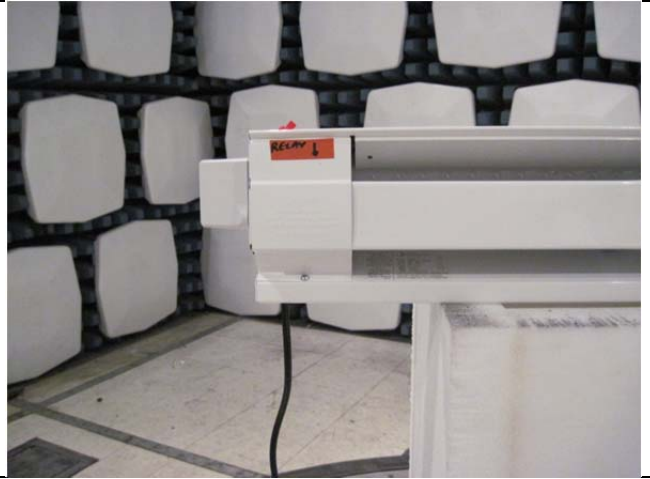

EUT on test pedestal



EUT from the front.

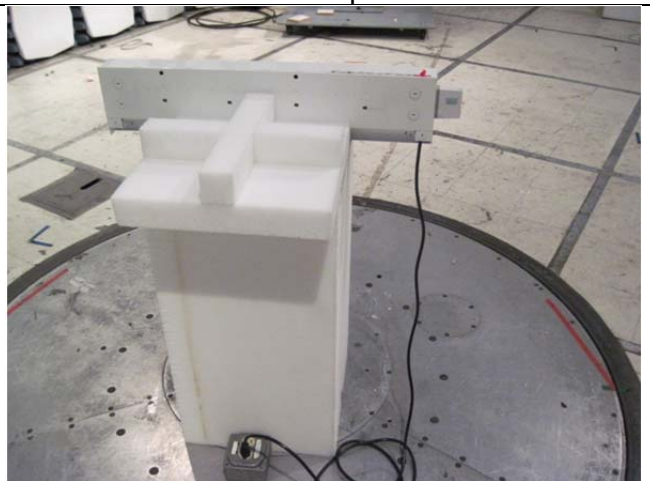

EUT from the rear.

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 19 of 48

EXHIBIT 6. CONDUCTED EMISSIONS TEST, AC POWER LINE

6.1 Test Setup

The test area and setup are in accordance with ANSI C63.4 and with Title 47 CFR, FCC Part 15, Industry Canada RSS-210 and RSS GEN. The EUT was placed on a non-conductive wooden table, with a height of 80 cm above the reference ground plane. The EUT was connected to a USB port of a generic laptop and set to transmit. The Generic laptop power supply was then plugged into a 50 Ω (ohm), 50/250 μ H Line Impedance Stabilization Network (LISN). The AC power supply of 120V was provided via an appropriate broadband EMI Filter, and then to the LISN line input. Final readings were then taken and recorded. After the EUT was setup and connected to the LISN, the RF Sampling Port of the LISN was connected to a 10 dB Attenuator-Limiter, and then to EMI receiver System. The EMCO LISN used has the ability to terminate the unused port with a 50 Ω (ohm) load when switched to either L1 (line) or L2 (neutral).

6.2 Test Procedure

The EUT was investigated in continuous modulated transmit mode for this portion of the testing. The appropriate frequency range and bandwidths were selected on the EMI Receiver, and measurements were made. The bandwidth used for these measurements is 9 kHz, as specified in CISPR 16-1, Section 1, Table 1, for Quasi-Peak and Average detectors in the frequency range of 150 kHz to 30 MHz. Final readings were then taken and recorded.

6.3 Test Equipment Utilized

A list of the test equipment and accessories utilized for the Conducted Emissions test is provided in Appendix A. This list includes calibration information and equipment descriptions. All equipment is calibrated and used according to the operation manuals supplied by the manufacturers. Calibrations of the LISN and Limiter were performed at an IEC/ISO 17025 accredited calibration laboratory, traceable to the SI standard. All cables are calibrated and checked periodically for conformance. The emissions are measured on the EMI System, which has automatic correction for all factors stored in memory and allows direct readings to be taken.

6.4 Test Results

The EUT was found to **MEET** the Conducted Emission requirements of FCC Part 15.207 and RSS GEN 7.2.2 for Conducted Emissions for an Intentional Radiator. See the Data Charts and Graphs for more details of the test results.

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 20 of 48

6.5 FCC Limits of Conducted Emissions at the AC Mains Ports

Frequency Range (MHz)	Class B Limits (dB μ V)		Measuring Bandwidth
	Quasi-Peak	Average	
0.150 -0.50 *	66-56	56-46	RBW = 9 kHz VBW $\geq$ 9 kHz for QP VBW = 1 Hz for Average
0.5 – 5.0	56	46	
5.0 – 30	60	50	
* The limit decreases linearly with the logarithm of the frequency in this range.			

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 21 of 48

6.6

CONDUCTED EMISSIONS TEST DATA CHART

Frequency Range inspected: 150 KHz to 30 MHz

Manufacturer:	Honeywell				
Date(s) of Test:	June 13 th 2011				
Project Engineer:	Khairul Aidi Zainal				
Test Engineer:	Khairul Aidi Zainal				
Voltage:	120 VAC				
Operation Mode:	Continuous transmit, modulated				
Environmental Conditions in the Lab:	Temperature: 71° F Relative Humidity: 34 %				
Test Location:	X	AC Mains Test area			Chamber
EUT Placed On:	X	40cm from Vertical Ground Plane			10cm Spacers
	X	80cm above Ground Plane			Other:
Measurements:		Pre-Compliance		Preliminary	X Final
Detectors Used:		Peak	X	Quasi-Peak	X Average


		<u>QUASI-PEAK</u>			<u>AVERAGE</u>		
Frequency (MHz)	Line	Q-Peak Reading (dBμV)	Q-Peak Limit (dBμ V)	Quasi-Peak Margin (dB)	Average Reading (dBμV)	Average Limit (dBμ V)	Average Margin (dB)
0.338	1.0	33.4	59.3	25.9	27.5	49.3	21.8
4.000	1.0	32.8	56.0	23.2	31.5	46.0	14.5
0.334	2.0	37.8	59.4	21.6	28.0	49.4	21.4
3.072	2.0	22.4	56.0	33.6	11.5	46.0	34.5
4.000	2.0	33.1	56.0	22.9	31.5	46.0	14.5

Notes:

- 1) The emissions listed are characteristic of the power supply used, and did not change by the EUT.

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 22 of 48


6.7 Test Setup Photo(s) – Conducted Emissions Test

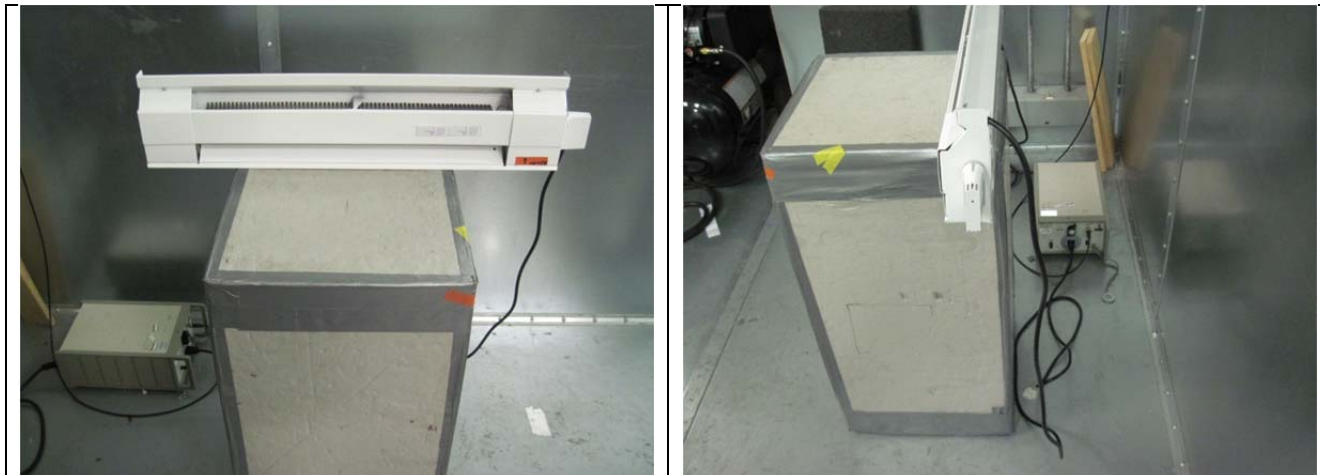

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 23 of 48

6.8 Screen Captures – Conducted Emissions Test

These screen captures represent Peak Emissions. For conducted emission measurements, both a Quasi-Peak detector function and an Average detector function are utilized. The emissions must meet both the Quasi-peak limit and the Average limit as described in 47 CFR 15.207 and RSS GEN 7.2.2 (Table 2).

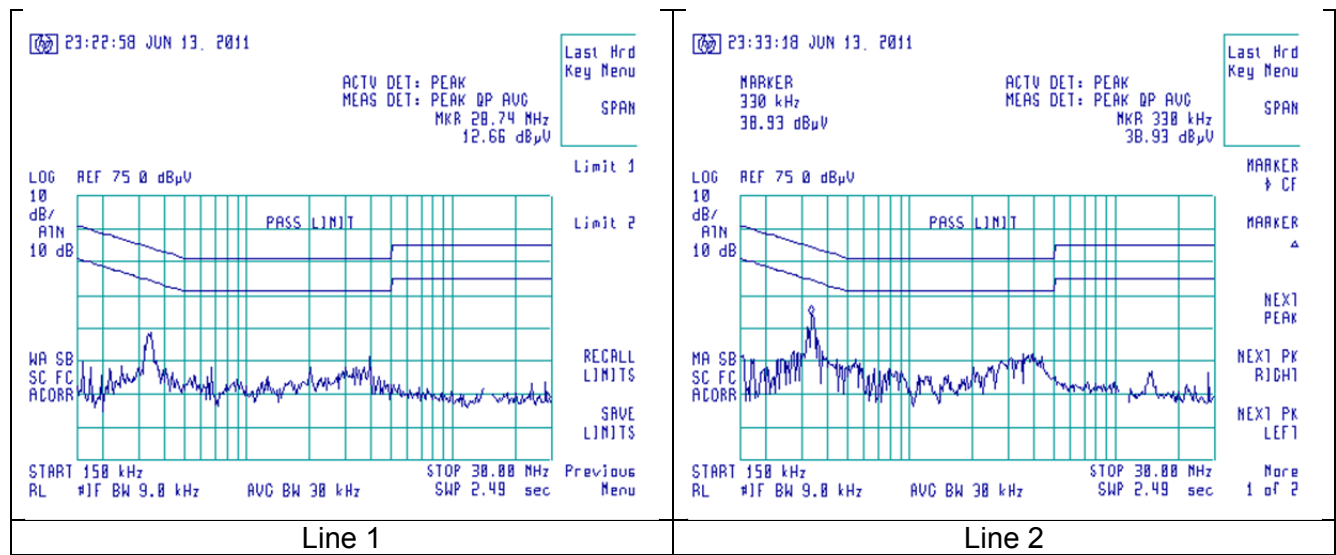

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 24 of 48

EXHIBIT 7. OCCUPIED BANDWIDTH

7.1 - Limits

For an FHSS system operating in the 902 to 928 MHz band, the maximum allowable 20dB bandwidth is 500 kHz.

7.2 - Method of Measurements

Industry Canada (IC RSS GEN 4.6.1) requires the measurement of the 99% bandwidth while CFR 47 part 15.247 requires the measurement of the 20dB bandwidth. For this portion of the tests, a direct measurement of the transmitted signal was performed at the antenna port of the EUT, via a cable connection to a spectrum analyzer. An attenuator was placed in series with the cable to protect the spectrum analyzer. The loss from the cable and the attenuator were added on the analyzer as gain offset settings there by allowing direct measurements, without the need for any further corrections. The EUT was configured to run in a continuous transmit mode, while being supplied with typical data as a modulation source. A bandwidth measurement function that is built into the spectrum analyzer was used to measure the appropriate bandwidths.

7.3 - Test Data

Channel (MHz)	Bandwidth (kHz)
903.0	63.83
914.6	64.13
926.4	64.05

The closest bandwidth to the limit of 500 kHz is 64.1kHz which is 435.9 kHz below the limit.

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 25 of 48

EXHIBIT 8. BAND EDGE MEASUREMENTS

8.1 - Method of Measurements

FCC 15.247(d) require a measurement of spurious emission levels to be at least 20 dB lower than the fundamental emission level, in particular at the Band-Edges where the intentional radiator operates. Also, RSS 210 Section 2.2 requires that unwanted emissions meet limits listed in RSS GEN and also to the limits in the applicable annex. The following screen captures demonstrate compliance of the intentional radiator at the 902 - 928 MHz Band-Edges. The EUT was operated in continuous transmit mode with continuous modulation, with internally generated data as the modulating source. The EUT was operated at the lowest channel for the investigation of the lower Band-Edge, and at the highest channel for the investigation of the higher Band-Edge.


The Band-edge measurements were performed conducted. The conducted measurement of band-edge was performed to satisfy FCC 15.247(d).

Conducted measurements of the spurious emission were performed with a measurement bandwidth of 100kHz.


Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 26 of 48

8.2. Band edge captures.

A. Continuously transmitting and modulated.

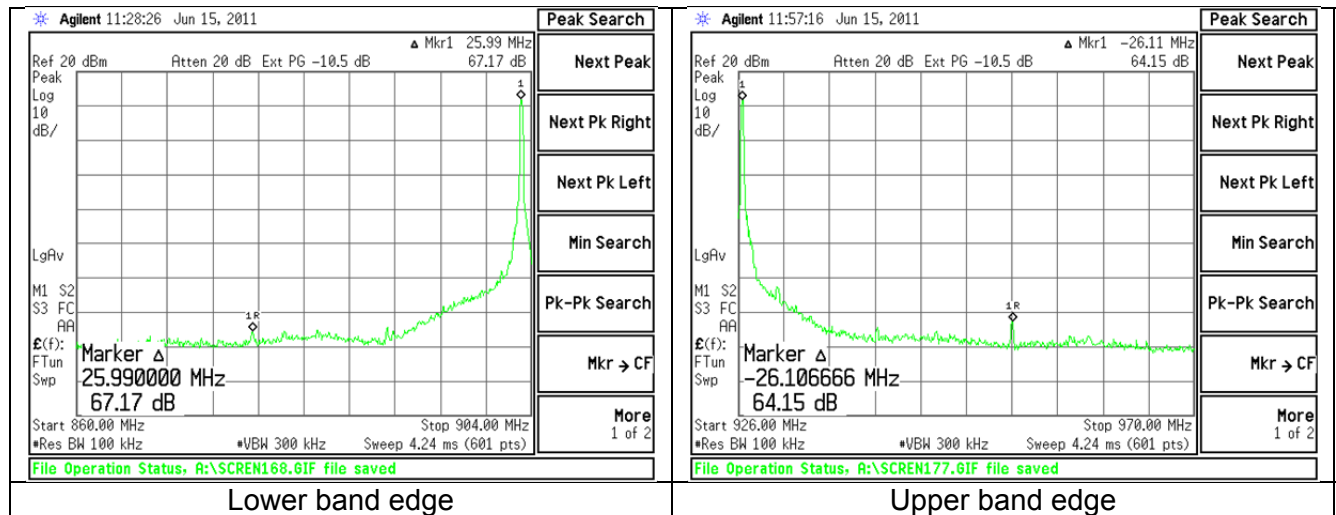

B. Hopping mode.

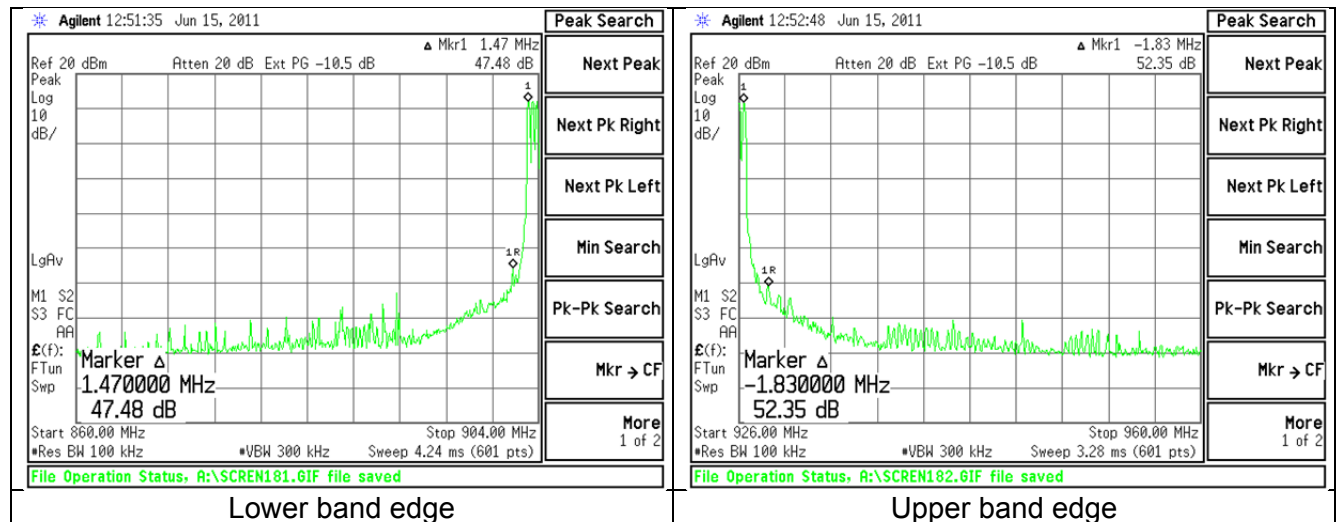

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 27 of 48

EXHIBIT 9. POWER OUTPUT (CONDUCTED): 15.247(b)

9.1 - Method of Measurements

The conducted RF output power of the EUT was measured at the antenna port using a short RF cable along with an attenuator as protection for the spectrum analyzer. The loss from the cable and the attenuator were added on the analyzer as gain offset settings there by allowing direct measurements without the need for any further corrections. The unit was configured to run in a continuous transmit mode, while being supplied with typical data as a modulation source. The spectrum analyzer was used with the appropriate resolution bandwidth, with measurements from a peak detector presented in the chart below.

9.2 - Test Data

Chan (MHz)	Power (dBm)	Limit (dBm)	Margin (dB)
903.0	11.2	30.0	18.8
914.6	11.1	30.0	19.0
926.4	10.9	30.0	19.1

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 28 of 48

EXHIBIT 10. CONDUCTED SPURIOUS EMISSIONS: 15.247(d)

10.1 - Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 db below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

10.2 – Conducted Harmonic And Spurious RF Measurements

FCC Part 15.247(d) and IC RSS 210 A8.5 both require a measurement of conducted harmonic and spurious RF emission levels, as reference to the carrier level when measured in a 100 kHz bandwidth. For this test, the spurious and harmonic RF emissions from the EUT were measured at the EUT antenna port using a short RF cable along with an attenuator as protection for the spectrum analyzer. The loss from the cable and the attenuator were added on the analyzer as gain offset settings, thereby allowing direct readings of the measurements made without the need for any further corrections. A spectrum analyzer was used with the resolution bandwidth set to 100 kHz for this portion of the tests. The unit was configured to run in a continuous transmit mode, while being supplied with typical data as a modulation source. The spectrum analyzer was used with measurements from a peak detector presented in the chart below. Screen captures were acquired and any noticeable spurious and harmonic signals were identified and measured.

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 29 of 48

10.3 - Test Data

	Channel low	Channel middle	Channel high
Fundamental	11.2	11.1	10.9
2 nd Harmonic	-43.3	-42.9	-42.6
3 rd Harmonic	NOTE 2	NOTE 2	NOTE 2
4 th Harmonic	NOTE 2	NOTE 2	NOTE 2
5 th Harmonic	-67.2	-67.8	-67.5
6 th Harmonic	-65.5	-65.1	-63.8
7 th Harmonic	-56.6	-57.1	-57.4
8 th Harmonic	-48.2	-48.9	-49.0
9 th Harmonic	-56.3	-57.7	-59.0
10 th Harmonic	-58.7	-55.0	-51.9

Note:



1. All reported data are in dBm.
2. Spurious emission buried within system noise floor.

The table below lists other notable spurious emissions other than the harmonics.

Freq(MHz)	Chan	level(dBm)
643.35	LOW	-58.4
169.20	MID	-49.0
746.30	MID	-51.1
169.20	HIGH	-50.4
757.90	HIGH	-53.5


Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 30 of 48

10.4 – Screen Captures – Spurious Radiated Emissions

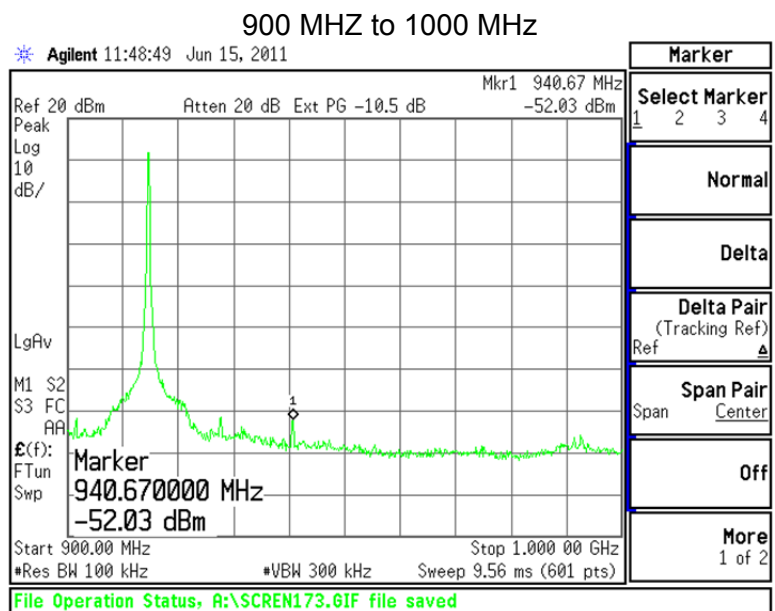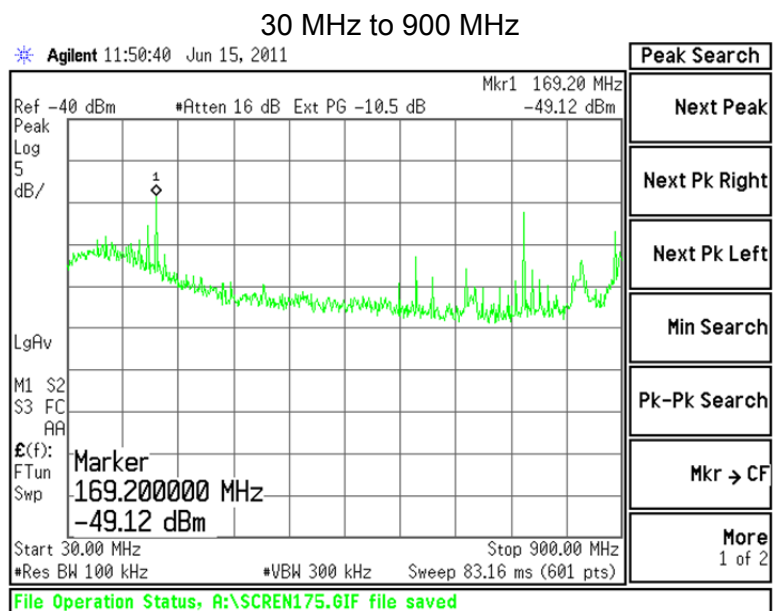

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 31 of 48

1000 MHz to 10000 MHz

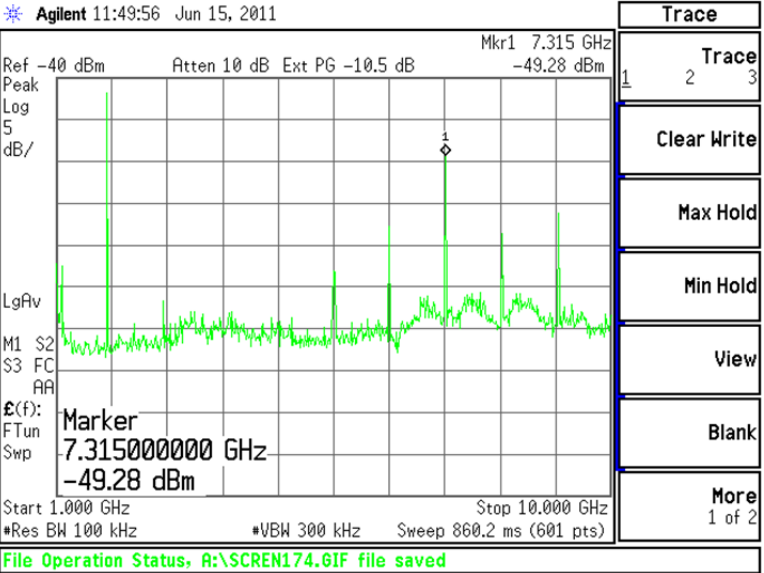

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 32 of 48

EXHIBIT 11. FREQUENCY & POWER STABILITY OVER VOLTAGE VARIATIONS

The power and frequency stability of the device was examined as a function of the input voltage available to the EUT. A Spectrum Analyzer was used to measure the power and frequency at the appropriate frequency markers. Power was supplied by an external bench-type AC power supply and was varied $\pm 15\%$ from the nominal.

93.5 VAC		110 VAC		126.5 VAC	
Power (dBm)	Frequency (Hz)	Power (dBm)	Frequency (Hz)	Power (dBm)	Frequency (Hz)
11.2	903000830	11.2	903000830	11.2	903000830
11.0	914598080	11.1	914598080	11.1	914598080
10.9	926395490	10.9	926395490	10.9	926395490

The power was then cycled On/Off to observe system response. No unusual response was observed, the emission characteristics were well behaved, and the system returned to the same state of operation as before the power cycle.

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 33 of 48

EXHIBIT 12. CHANNEL PLAN AND SEPARATION

A spectrum analyzer was used with a resolution bandwidth of 100 kHz to measure the channel separation of the EUT.


RANGE (MHz)	Number of Channels	Separation (kHz)
900-905	5.5	392.0
905-910	10.5	400.0
910-915	10.0	400.0
915-920	11.5	600.0
920-925	8.5	392.0
925-928	4.0	405.0

Total Chans	50
Max separation	600.00
Min Separation	392.00

The maximum and minimum channel-separations measured for this device are 600 kHz and 392 kHz respectively. The maximum 20dB bandwidth of the device, as reported in the previous section is 64.1kHz. The following plots describe this spacing, and also establish the channel separation and plan.


This EUT also satisfies the minimum number of hopping channels which is 50.

12.1 - Screen Captures - Channel Separation

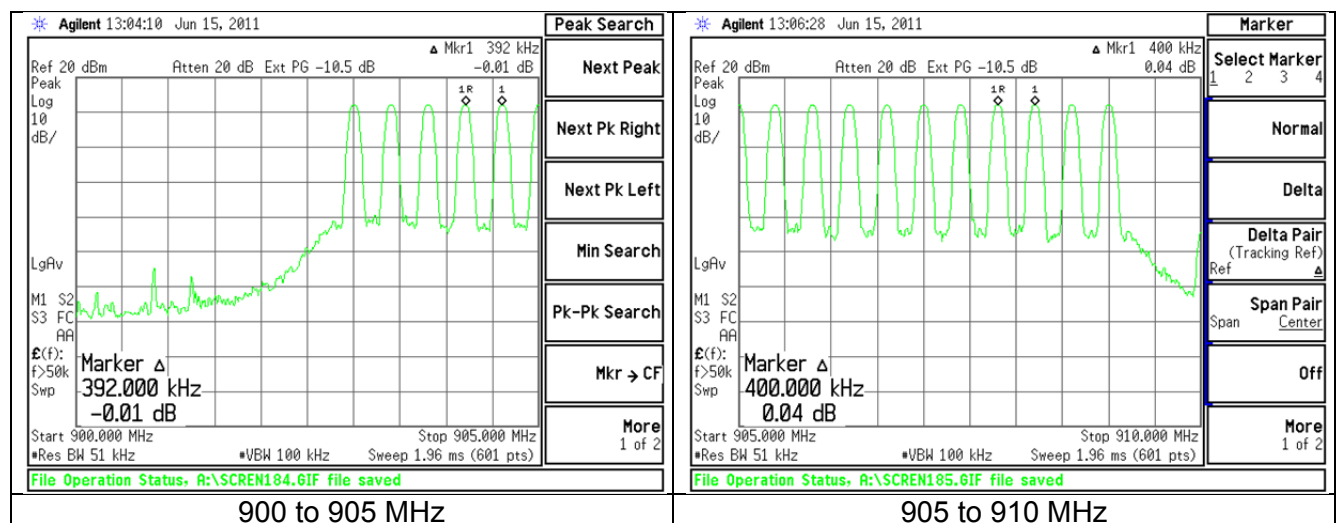

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 34 of 48

Screen Captures – Channel Separation (continued)

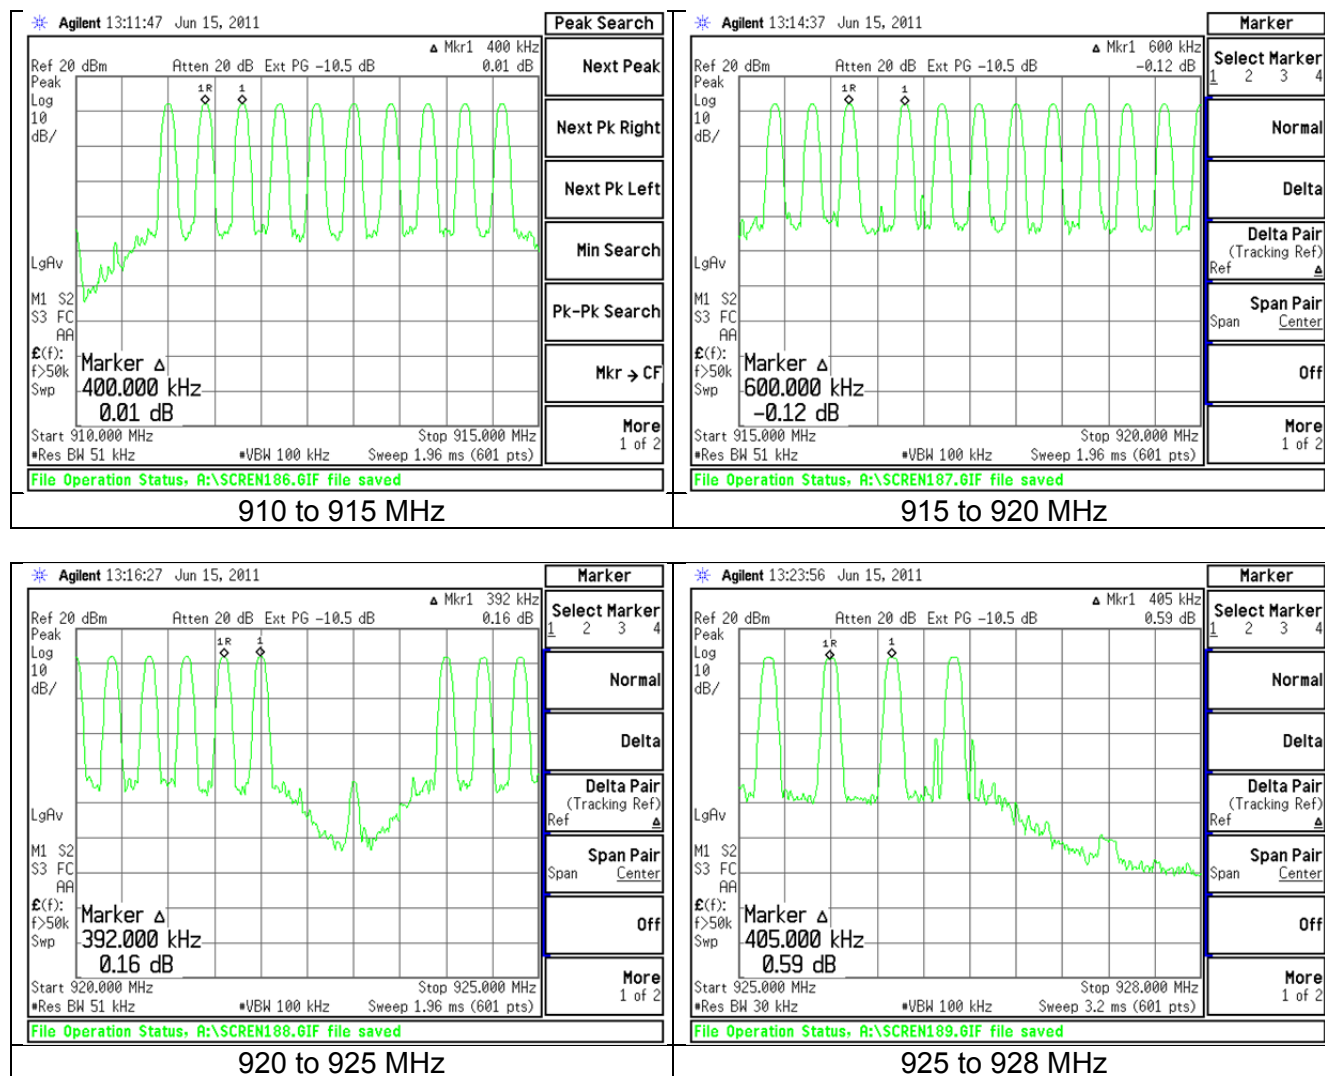


Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 35 of 48

EXHIBIT 13. CHANNEL OCCUPANCY.


Part 15.247(a)(1)(i) requires an average channel occupancy, for this device, of no more than 400 milliseconds in a 20second window .The channel occupancy for this EUT was measured using a spectrum analyzer, set to zero-span at the frequency of interest. With the analyzer in peak-hold mode, the transmission lengths can be measured by adjusting the sweep rate of the analyzer. A suitable sweep rate was used to measure the channel occupancy at the low, mid and high channels. The longest time any transmission will occur on a single channel is **217.5 ms**. The maximum occupancy in a **20** second window is **1** (one) transmission cycle which translates to **248 ms**.

13.1 Time occupancy captures.

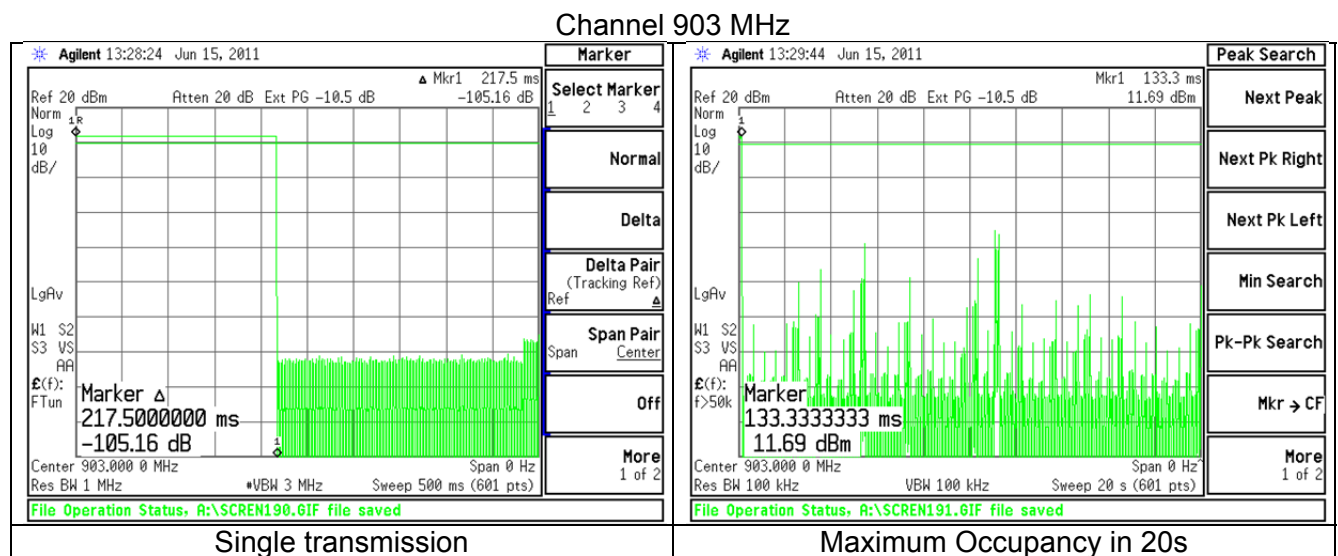


Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 36 of 48

Channel 914.6 MHz

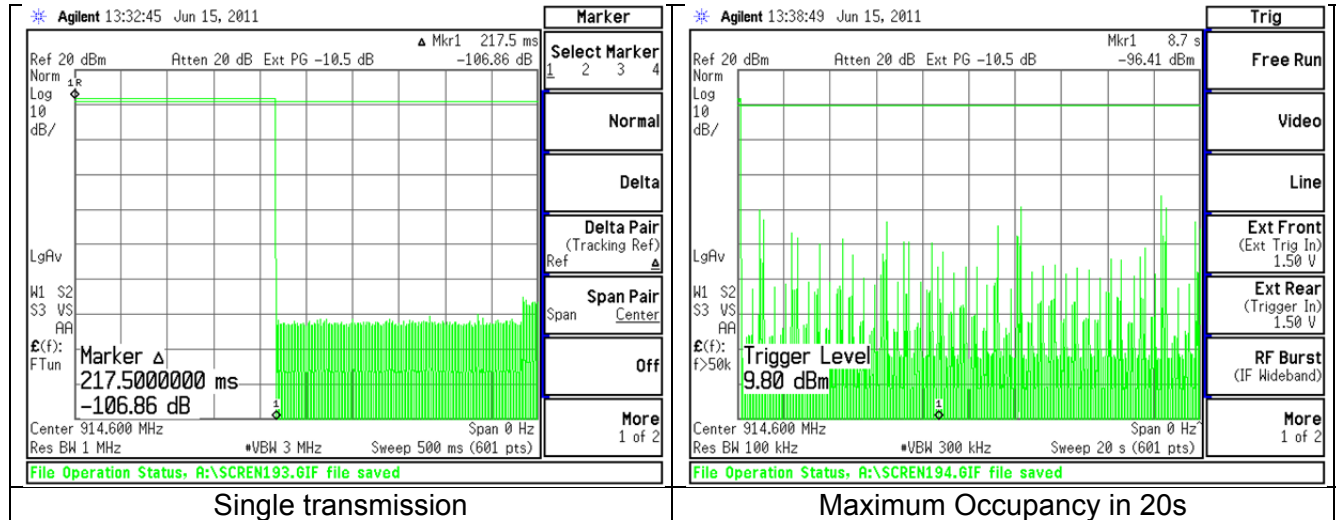

Channel 926.4 MHz

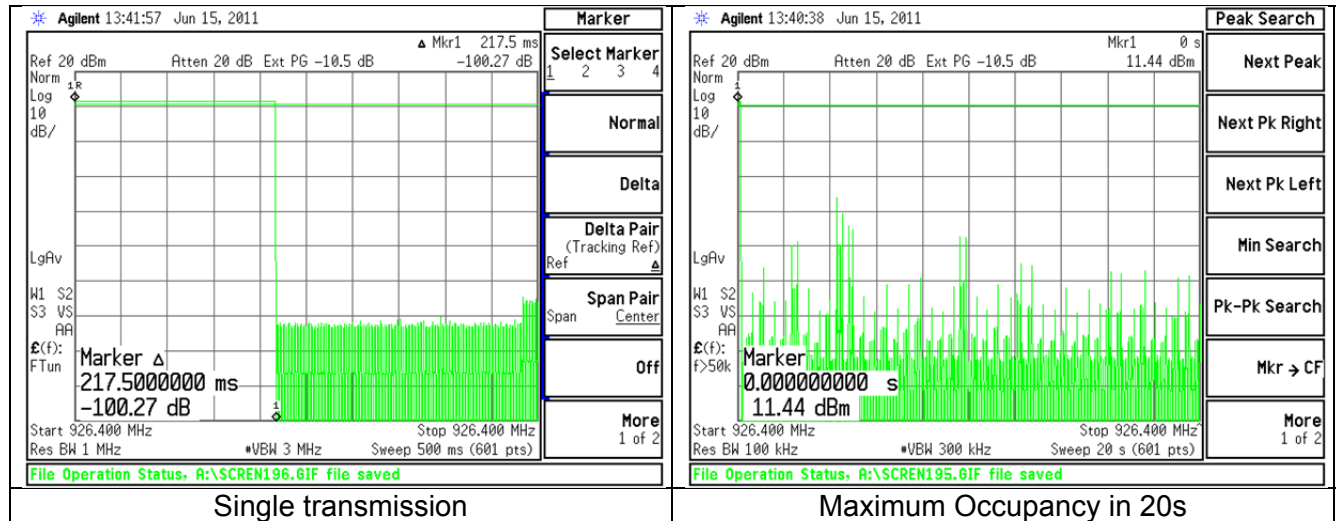

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 37 of 48

EXHIBIT 14. EQUAL CHANNEL USAGE

Note: This section is provided by the manufacturer.

Table 2 (typical hop sequence)																
0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Transmission #
6	31	33	8	48	23	26	1	17	42	38	13	19	44	35	10	Channel used
16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	Transmission #
9	34	37	12	0	25	3	28	16	41	24	49	18	43	45	20	Channel used
32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	Transmission #
21	46	30	5	7	32	47	22	29	4	40	15	14	39	27	2	Channel used
48	49	50														Transmission #
11	36	repeat														Channel used

This sample hop sequence shows equal usage of all channels

Each EUT has its own pseudorandom frequency sequence use for the transmitting channel. The transmit sequences are derived from a 15 bit seed value chosen randomly and automatically at the time the system is commissioned with client devices. The characteristics of the pseudorandom frequency sequence are:

- Each possible random seed value results in a unique pseudorandom frequency sequence.
- Each of the 50 frequencies occurs in the sequence once and only once before the sequence repeats.
- There are no circumstances or special conditions that skip frequencies in the sequence.

Once chosen, the sequence does not change unless re-commissioned.

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 38 of 48

EXHIBIT 15. PSEUDORANDOM HOPPING SEQUENCE.

Note: This section is provided by the manufacturer.

Table 2 (typical hop sequence)																
0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Transmission #
6	31	33	8	48	23	26	1	17	42	38	13	19	44	35	10	Channel used
16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	Transmission #
9	34	37	12	0	25	3	28	16	41	24	49	18	43	45	20	Channel used
32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	Transmission #
21	46	30	5	7	32	47	22	29	4	40	15	14	39	27	2	Channel used
48	49	50														Transmission #
11	36	repeat														Channel used

This sample hop sequence shows usage of all channels and randomness of channel selections.

Each EUT has its own pseudorandom frequency sequence use for the transmitting channel. The transmit sequences are derived from a 15 bit seed value chosen randomly and automatically at the time the system is commissioned with client devices. The characteristics of the pseudorandom frequency sequence are:

- Each possible random seed value results in a unique pseudorandom frequency sequence.
- Each of the 50 frequencies occurs in the sequence once and only once before the sequence repeats.
- There are no circumstances or special conditions that skip frequencies in the sequence.

Once chosen, the sequence does not change unless re-commissioned.

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 39 of 48

EXHIBIT 16. RECEIVER SYNCHRONIZATION AND INPUT BANDWIDTH.

Note: This section is provided by the manufacturer.

At the core of the radio block is an integrated transceiver, CC1101 manufactured by Texas Instruments. The CC1101 is configured by the RF protocol microcontroller to operate at frequencies as determined by a frequency sequencing algorithm. The bandwidth, transmit power, and modulation rate and type are set identically for all of the 50 frequencies utilized by this system. The protocol microcontroller provides the commissioned network with a synchronization signal periodically.

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 40 of 48

EXHIBIT 17. MPE CALCULATIONS

The following MPE calculations are based on a measured conducted RF power of +11.2 dBm as presented to the antenna. The peak gain of this antenna, based on the data sheet is -1.0 dBi.

<u>Prediction of MPE limit at a given distance</u>			
Equation from page 18 of OET Bulletin 65, Edition 97-01			
$S = \frac{PG}{4\pi R^2}$			
where:	S = power density		
	P = power input to the antenna		
	G = power gain of the antenna in the direction of interest relative to an isotropic radiator		
	R = distance to the center of radiation of the antenna		
Maximum peak output power at antenna input terminal:	11.20	(dBm)	
Maximum peak output power at antenna input terminal:	13.183	(mW)	
Antenna gain(typical):	-1	(dBi)	
Maximum antenna gain:	0.794	(numeric)	
Prediction distance:	20	(cm)	
Prediction frequency:	903	(MHz)	
MPE limit for uncontrolled exposure at prediction frequency:	0.6	(mW/cm^2)	
Power density at prediction frequency:	0.002083	(mW/cm^2)	
Maximum allowable antenna gain:	23.6	(dBi)	
Margin of Compliance at	20	cm =	24.6 dB

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 41 of 48

APPENDIX A – Test Equipment List



Date: 1-Jun-2011

Type Test: Conducted Emissions

Job #: C-1156

Prepared By: Aidi

Customer: Honeywell

Quote #: 311067

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE-960014	EMI Receiver-Filter section	HP	85460A	3448A00296	10/29/2010	10/29/2011	Active Calibration
2	AA-960008	LSN	EMCO	3816ZNM	9701-1057	1/4/2011	1/4/2012	Active Calibration
3	AA-960072	Transient Limiter	HP	11947A	3107A02515	10/29/2010	10/29/2011	Active Calibration

Project Engineer: Aidi

Quality Assurance: PEIER



Date: 1-Jun-2011

Type Test: Radiated Emissions

Job #: C-1156

Prepared By: Aidi

Customer: Honeywell

Quote #: 311067

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE-960014	EMI Receiver-Filter section	HP	85460A	3448A00296	10/29/2010	10/29/2011	Active Calibration
2	AA-960155	900MHz High Pass Filter	KWM	HFF-L-14105	7272-03	2/28/2011	2/28/2012	Active Calibration
3	AA-960150	Bicon Antenna	EIS	3110B	0003-3346	10/19/2010	10/19/2011	Active Calibration
4	AA-960078	Log Periodic Antenna	EMCO	93146	9701-4855	10/19/2010	10/19/2011	Active Calibration
5	AA-960007	Double Ridge Horn Antenna	EMCO	3115	9311-4138	4/27/2011	4/27/2012	Active Calibration
6	EE-960160	0.8-21GHz LNA	Mini-Circuits	ZVA-213X-S+	977711030	4/27/2011	4/27/2012	Active Calibration
7	AA-960007	Double Ridge Horn Antenna	EMCO	3115	9311-4138	4/27/2011	4/27/2012	Active Calibration
8	EE-960073	Spectrum Analyzer	Agilent	E4446A	US45300564	9/22/2010	9/22/2011	Active Calibration

Project Engineer: Aidi

Quality Assurance: Peter



Date: 1-Jun-2011

Type Test: Channel Occupancy

Job #: C-1156

Prepared By: Aidi

Customer: Honeywell

Quote #: 311067

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE-960073	Spectrum Analyzer	Agilent	E4446A	US45300564	9/22/2010	9/22/2011	Active Calibration

Project Engineer: Aidi

Quality Assurance: MIKE



Date: 1-Jun-2011

Type Test: Channel Plan & Separation

Job #: C-1156

Prepared By: Aidi

Customer: Honeywell

Quote #: 311067

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE-960073	Spectrum Analyzer	Agilent	E4446A	US45300564	9/22/2010	9/22/2011	Active Calibration

Project Engineer: Aidi

Quality Assurance: MIKE

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 42 of 48



Date: 1-Jun-2011

Type Test: 100KHZ Spur Emiss

Job #: C-1156

Prepared By: AIDI

Customer: Honeywell

Quote #: 311067

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE-960073	SpectrumAnalyzer	Agilent	E4446A	US45300564	9/22/2010	9/22/2011	Active Calibration

Project Engineer: AIDI

Quality Assurance: MIKE



Date: 1-Jun-2011

Type Test: Conducted Power Output

Job #: C-1156

Prepared By: AIDI

Customer: Honeywell

Quote #: 311067

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE-960073	SpectrumAnalyzer	Agilent	E4446A	US45300564	9/22/2010	9/22/2011	Active Calibration
2	AA-960144	Phaselix	Gore	EXD010010720	5800373	6/1/2011	6/1/2012	Active Calibration

Project Engineer: AIDI

Quality Assurance: PETER



Date: 1-Jun-2011

Type Test: Occupied Bandwidth (20dB)

Job #: C-1156

Prepared By: AIDI

Customer: Honeywell

Quote #: 311067

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE-960073	SpectrumAnalyzer	Agilent	E4446A	US45300564	9/22/2010	9/22/2011	Active Calibration
2	AA-960144	Phaselix	Gore	EXD010010720	5800373	6/1/2011	6/1/2012	Active Calibration

Project Engineer: AIDI

Quality Assurance: PETER

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 43 of 48

APPENDIX B - Test Standards: CURRENT PUBLICATION DATES RADIO

STANDARD #	DATE	Am. 1	Am. 2
ANSI C63.4	2003		
ANSI C63.10	2009		
CISPR 11	2009-05	2009-12 P	
CISPR 12	2007-05		
CISPR 14-1	2005-11	2008-11	
CISPR 14-2	2001-11	2001-11	2008-05
CISPR 16-1-1 Note 1	2010-01		
CISPR 16-1-2 Note 1	2003	2004-04	2006-07
CISPR 22	2008-09		
CISPR 24	1997-09	2001-07	2002-10
EN 55011	2009		
EN 55014-1	2006		
EN 55014-2	1997		
EN 55022	2006	2007	
EN 60601-1-2	2007-03		
EN 61000-3-2	2006-05		
EN 61000-3-3	2008-12		
EN 61000-4-2	2009-05		
EN 61000-4-3	2006-07	2008-05	
EN 61000-4-4	2004		
EN 61000-4-5	2006-12		
EN 61000-4-6	2009-05		
EN 61000-4-8	1994	2001	
EN 61000-4-11	2004-10		
EN 61000-6-1	2007-02		
EN 61000-6-2	2005-12		
EN 61000-6-3	2007-02		
EN 61000-6-4	2007-02		
FCC 47 CFR, Parts 0-15, 18, 90, 95	2009		
FCC Public Notice DA 00-1407	2000		
FCC ET Docket # 99-231	2002		
FCC Procedures	2007		
ICES 001	2006-06		
ICES 002	2009-08		
ICES 003	2004-02		
IEC 60601-1-2 Note 1	2007-03		
IEC 61000-3-2	2005-11	2008-03	2009-02
IEC 61000-3-3	2008-06		
IEC 61000-4-2	2008-12		
IEC 61000-4-3	2008-04	incl in 2008-04	2009-12 FD

[illegible]

Updated on 04-27-10 P=Project FD= Final Draft

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 44 of 48

APPENDIX C - Uncertainty Statement

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level, using a coverage factor of $k=2$.

Table of Expanded Uncertainty Values, ($K=2$) for Specified Measurements

Measurement Type	Particular Configuration	Uncertainty Values
Radiated Emissions	3 – Meter chamber, Biconical Antenna	4.24 dB
Radiated Emissions	3-Meter Chamber, Log Periodic Antenna	4.8 dB
Radiated Emissions	10-Meter OATS, Biconical Antenna	4.18 dB
Radiated Emissions	10-Meter OATS, Log Periodic Antenna	3.92 dB
Conducted Emissions	Shielded Room/EMCO LISN	1.60 dB
Radiated Immunity	3 Volts/Meter in 3-Meter Chamber	1.128 Volts/Meter
Conducted Immunity	3 Volts level	1.0 V

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 45 of 48

APPENDIX D – EUT firmware instructions.

1. Minimum hardware for FCC code is dual colored (red/green) LED and single push button.
 - a. LED has three different states
 - i. Solid
 - ii. Slow blink = 1Hz
 - iii. Fast blink = 4Hz
 - b. Push button has 5 states
 - i. Press and hold on power up
 - ii. Short Press. Press and Hold < 2 seconds
 - iii. Medium Press. 2 sec < Press and Hold < 6 sec
 - iv. Long Press. 6 sec < Press and Hold < 10 sec
 - v. No Button press. 10 sec < Press and Hold
 - c. Button and LED behavior.
 - i. LED will not be constantly on. LED will flash to indicate change of state on button press and release.
 - ii. Button action will be processed on button release. LED will flash to indicate the new mode on button release.
 - iii. When button is being pressed and held, the LED will indicate the button state (short, medium, long, no button). For example, when the button is pressed and held, on the initial press the LED will turn solid green to indicate button press is in short press time window. Once press time has exceeded two seconds the LED will turn solid red to indicate that press time is in the medium press time window. Once press time has exceeded six seconds the LED will turn solid amber to indicate that press time is in the long press time window. Once press time has exceeded ten seconds the LED will turn off to indicate that press time is in the no button press time window. The user will release the button when the LED corresponds to the desired button press type.
2. FCC modes (FR1, FT1 and FT2) and Qualification modes (Q1 and Q2)
 - a. Power up (Mode selection)
 - i. If button is not pressed and held during power up then enter RX mode FR1. On power up fast blink amber LED for two seconds then transition into FR1 mode.
 1. Default Settings for FR1 mode
 - a. Antenna A
 - b. Freq low
 - ii. If button is pressed and held down during power up for less than 2 seconds (Short button press = LED is solid green) then enter TX mode FT1. On button release fast blink green LED for two seconds and then transition into FT1 mode.
 1. Default Settings for FT1 mode
 - a. Antenna A (and max power)
 - b. Freq low
 - c. Modulated Data
 - iii. If button is pressed and held down during power up for between 2 to 6 seconds (Medium button press = LED is solid red) then enter into TX mode

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 46 of 48

FT2. On button release fast blink red LED for two seconds and then transition into FT2 mode.

1. Default setting for FT2 mode
 - a. Antenna A
 - b. Modulated Data
- iv. If button is pressed and held down during power up for between 6 to 10 seconds (Long button press = LED is solid amber) then enter into Q1. On button release fast blink amber and green LED for two seconds and then transition into Q1 mode.
 1. Default setting for Q1 mode
 - a. Antenna A
- v. If button is pressed and held down during power up for more than 10 seconds – fast blink red and green LED for two seconds and then transition into Q2 mode.
 1. Setting for Q2 mode
 - a. TWO_ANTENNAS macro defined
 - b. TWO_ANTENNAS macro removed
- b. Freq Switch (low, mid, high)
 - i. Short button press (button released when LED is green).
 - ii. On button release the LED turns off and frequency incremented (low, mid, high)(high wraps back to low)
 - iii. Green LED flashes new mode at slow rate
 1. 1 flash = low freq
 2. 2 flash = mid freq
 3. 3 flash = high freq
- c. Ant Switch (Ant A, Ant B) or Power Level Selection (max = 0xC0, 0xC2, 0xC4, 0xC6, min = 0xC8)
 - i. Medium button press (button released when LED is red)
 - ii. On button release LED turns off and antenna (or power) is switched
 - iii. Red LED flashes new mode at slow rate
 1. 1 flash = antenna A
 2. 2 flash = antenna B
 3. 3 flash = antenna A and B (only available for Q1 mode)Or for Power Level (only available on single antenna devices with special software build)
 1. 1 flash = max power 0xC0
 2. 2 flash = power 0xC2
 3. 3 flash = power 0xC4
 4. 4 flash = power 0xC6
 5. 5 flash = min power 0xC8
- d. Modulation Switch (Modulated data, Un-modulated data)
 - i. Long button press (button released when LED is amber)
 - ii. On button release LED turns off and modulation is switched
 - iii. Amber LED flashes new mode at slow rate
 1. 1 flash = Modulated data
 2. 2 flash = Un-modulated data

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 47 of 48

- e. Freq Switch would not apply to FT2, Q1 and Q2 modes (when short button press is released, green LED does not flash new mode)
- f. Antenna Switch would not apply to Q2 mode (when long button press is released, red LED does not flash new mode).
- g. Modulation Switch would not apply to FR1, Q1 and Q2 modes (when long button press is released, amber LED does not flash new mode).

Prepared For: Honeywell	EUT: Antenna Module	LS Research, LLC
Report # 311067	Model #: 50052669-001	Template: 15.247 FHSS template
LSR Job #: C-1156	Serial #: Engineering Sample	Page 48 of 48