



W66 N220 Commerce Court • Cedarburg, WI 53012

Phone: 262.375.4400 • Fax: 262.375.4248

www.lsr.com

TEST REPORT # 311121Tx LSR Job #:C-1232

Compliance Testing of:
RedLINK Internet Gateway

Test Date(s):

July 26th to July 29th, August 4th 2011

Prepared For:

Honeywell
1985 Douglas Drive North,
Golden Valley, MN 55422

In accordance with:
Federal Communications Commission (FCC)
Part 15, Subpart C, Section 15.247
Industry Canada (IC) RSS 210 Annex 8
Frequency Hopping Spread Spectrum (FHSS) Operating in the
Frequency Band 902 MHz – 928 MHz

This Test Report is issued under the Authority of:
Khairul Aidi Zainal, Senior EMC Engineer

Signature: Date: 8/12/2011

Test Report Reviewed by: Thomas Smith

Signature: Date:

Project Engineer:
Khairul Aidi Zainal, Senior EMC Engineer.

Signature: Date: 8/12/2011

This Test Report may not be reproduced, except in full, without written approval of LS Research, LLC.

TABLE OF CONTENTS

EXHIBIT 1. INTRODUCTION	4
1.1 - Scope.....	4
1.2 – Normative References	4
1.3 - LS Research, LLC Test Facility	5
1.4 – Location of Testing.....	5
1.5 – Test Equipment Utilized	5
EXHIBIT 2. PERFORMANCE ASSESSMENT	6
2.1 – Client Information	6
2.2 - Equipment Under Test (EUT) Information	6
2.3 - Associated Antenna Description	6
2.4 - EUT'S Technical Specifications	7
2.5 - Product Description.....	8
EXHIBIT 3. EUT OPERATING CONDITIONS & CONFIGURATIONS DURING TESTS	9
3.1 - Climate Test Conditions.....	9
3.2 - Applicability & Summary Of EMC Emission Test Results	9
3.3 - Modifications Incorporated In The EUT For Compliance Purposes	10
3.4 - Deviations & Exclusions From Test Specifications	10
EXHIBIT 4. DECLARATION OF CONFORMITY	10
EXHIBIT 5. RADIATED EMISSIONS TEST.....	11
5.1 - Test Setup.....	11
5.2 - Test Procedure	11
5.3 - Test Equipment Utilized	12
5.4 - Test Results	12
5.5 - Calculation of Radiated Emissions Limits and reported data.....	13
5.6 - Radiated Emissions Test Data Chart.....	14
5.7 - Test Setup Photo(s) – Radiated Emissions Test	16
EXHIBIT 6. CONDUCTED EMISSIONS TEST, AC POWER LINE	17
6.1 Test Setup.....	17
6.2 Test Procedure	17
6.3 Test Equipment Utilized	17
6.4 Test Results	17
6.5 FCC Limits of Conducted Emissions at the AC Mains Ports.....	18

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report #: 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 2 of 43

6.6	CONDUCTED EMISSIONS TEST DATA CHART	19
6.8	Screen Captures – Conducted Emissions Test	21
EXHIBIT 7. OCCUPIED BANDWIDTH		22
7.1 - Limits.....		22
7.2 - Method of Measurements		22
7.3 - Test Data		23
7.4 – Screen Captures.....		23
EXHIBIT 8. BAND EDGE MEASUREMENTS		25
8.1 - Method of Measurements		25
8.2. Band edge captures.....		26
EXHIBIT 9. POWER OUTPUT (CONDUCTED): 15.247(b).....		27
9.1 - Method of Measurements		27
9.2 - Test Data		27
9.3 – Screen Captures.....		27
EXHIBIT 10. CONDUCTED SPURIOUS EMISSIONS: 15.247(d).....		29
10.1 - Limits.....		29
10.2 – Conducted Harmonic And Spurious RF Measurements		29
10.3 - Test Data		30
10.4 – Screen Captures – Spurious Radiated Emissions		31
EXHIBIT 11. FREQUENCY & POWER STABILITY OVER VOLTAGE VARIATIONS.....		33
EXHIBIT 12. CHANNEL PLAN AND SEPARATION.....		34
12.1 - Screen Captures – Channel Separation		34
EXHIBIT 13. CHANNEL OCCUPANCY		36
13.1 Time occupancy captures.....		36
EXHIBIT 14. RECEIVER SYNCHRONIZATION AND INPUT BANDWIDTH.....		38
EXHIBIT 15. MPE CALCULATIONS		39
APPENDIX A – Test Equipment List.....		40
APPENDIX B – Test Standards: CURRENT PUBLICATION DATES RADIO		42
APPENDIX C - Uncertainty Statement.....		43

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report #: 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 3 of 43

EXHIBIT 1. INTRODUCTION

1.1 - Scope

References:	FCC Part 15, Subpart C, Section 15.247. RSS GEN issue 3 and RSS 210 issue 8 Annex 8
Title:	FCC : Telecommunication – Code of Federal Regulations, CFR 47, Part 15. IC : Low-power License-exempt Radio-communication Devices (All Frequency Bands): Category I Equipment
Purpose of Test:	To gain FCC and IC Certification Authorization for Low-Power License-Exempt Transmitters.
Test Procedures:	Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
Environmental Classification:	Commercial, Industrial or Business Residential

1.2 - Normative References

Publication	Year	Title
47 CFR, Parts 0-15 (FCC)	2010-10	Code of Federal Regulations - Telecommunications
RSS 210 Issue 8 Annex 8	2010-12	Low-power License-exempt Radio-communication Devices (All Frequency Bands): Category I Equipment
ANSI C63.4	2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
CISPR 16-1-1	2006-03 A1: 2006-09 A2: 2007-07	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-1: Measuring Apparatus.
FCC ET Docket No. 99-231	2002	Amendment to FCC Part 15 of the Commission's Rules Regarding Spread Spectrum Devices.
FCC Public Notice DA 00-705	2000	Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 4 of 43

1.3 - LS Research, LLC Test Facility

LS Research, LLC is accredited by A2LA (American Association for Laboratory Accreditation) as conforming to ISO/IEC 17025, 2005 "General Requirements for the Competence of Calibration and Testing Laboratories".

LS Research, LLC's scope of accreditation includes all test methods listed herein, unless otherwise noted. Accreditation status can be verified at A2LA's web site: www.a2la.net.

1.4 -Location of Testing

All testing was performed at the following location utilizing the facilities listed below, unless otherwise noted.

LS Research, LLC
W66 N220 Commerce Court
Cedarburg, Wisconsin, 53012 USA,

List of Facilities Located at LS Research, LLC:

Compact Chamber
Semi-Anechoic Chamber
Open Area Test Site (OATS)

1.5 -Test Equipment Utilized

A complete list of equipment utilized in testing is provided in Appendix A of this test report. Calibration dates are indicated in Appendix A. All test equipment is calibrated by a calibration laboratory accredited to the requirements of ISO/IEC 17025, and traceable to the SI standard.

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report #: 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 5 of 43

EXHIBIT 2.PERFORMANCE ASSESSMENT

2.1 - Client Information

Manufacturer Name:	Honeywell
Address:	1985 Douglas Drive, Golden Valley, MN 55422
Contact Name:	Dave Mulhouse

2.2 - EquipmentUnder Test (EUT) Information

The following information has been supplied by the applicant.

Product Name:	RedLINK Internet Gateway
Model Number:	THM6000R
Serial Number:	56502015004010 Radiated measurements. 37637015000344Conducted measurements.

2.3 - Associated Antenna Description

The Antenna associated with the device is 915 MHz Johanson Technology ceramic chip antenna.

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report #: 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 6 of 43

2.4 - EUT'S Technical Specifications

EUT Frequency Range (in MHz)	903.0 MHz – 926.4 MHz
RF Power in Watts (Conducted measurement at the antenna port)	
Minimum:	0.0144 Watts
Maximum:	0.0151 Watts
Max Conducted Output Power (in dBm)	11.8dBm
Field Strength at 3 meters	N/A
Occupied Bandwidth (99% BW)	62.9 kHz
Type of Modulation	FSK
Emission Designator	62K9F1D
EIRP (P _{out} + G _{ant})	12.02mW
Transmitter Spurious (worst case) at 3 meters	45.46dB _μ V/mat 9030MHz
Stepped (Y/N)	N
Step Value:	N/A
Frequency Tolerance %, Hz, ppm	Better than 100 ppm
Microprocessor Model # (if applicable)	TI CC1101
Antenna Information	
Detachable/non-detachable	Non-detachable
Type	Ceramic Chip Antenna
Gain (Data Sheet)	-1.0 dBi (Peak)
EUT will be operated under FCC Rule Part(s)	Title 47 part 15.247
EUT will be operated under RSS Rule Part(s)	RSS 210
Modular Filing	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Portable or Mobile?	Mobile

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 7 of 43

RF Technical Information:

Type of Evaluation (check one)	SAR Evaluation: Device Used in the Vicinity of the Human Head
	SAR Evaluation: Body-worn Device
	<input checked="" type="checkbox"/> RF Evaluation

If RF Evaluation checked above, test engineer to complete the following:

Evaluated against exposure limits: General Public Use Controlled Use

Duty Cycle used in evaluation: 100 %

Standard used for evaluation: OET 65

Measurement Distance: 20 cm

RF Value: **0.0239** V/m A/m W/m²

Measured Computed Calculated

2.5 - Product Description

The EUT provides an internet gateway to Honeywell REDLINK products.

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 8 of 43

EXHIBIT 3. EUT OPERATING CONDITIONS & CONFIGURATIONS DURING TESTS

3.1 - Climate Test Conditions

Temperature:	70° F
Humidity:	34 %
Pressure:	740mmHg

3.2 - Applicability & Summary Of EMC Emission Test Results

FCC and IC Paragraph	Test Requirements	Compliance (Yes/No)
FCC : 15.207 IC : RSS GEN sect. 7.2.2	Power Line Conducted Emissions Measurements	Yes
FCC : 15.247 (a)(1) IC : RSS 210A8.1 (a)	20 dB Bandwidth	Yes
FCC : 15.247(b) & 1.1310 IC : RSS 210 A8.4	Maximum Output Power	Yes
FCC : 15.247(i), 1.1307, 1.1310, 2.1091 & 2.1093 IC : RSS 102	RF Exposure Limit	Yes
FCC :15.247(d) IC : RSS 210 A8.5	RF Conducted Spurious Emissions at the Transmitter Antenna Terminal	Yes
FCC:15.247 (a)(1)(i)(iii) IC: RSS 210 (b)	Carrier Frequency Separation	Yes
FCC:15.247 (a)(1)(i),(ii),(iii) IC: RSS 210 (c),(d),(e)	Number of hopping channels	Yes
FCC:15.247 (a)(1)(i),(ii),(iii) IC: RSS 210 (c),(d),(e)	Time of occupancy (Dwell Time)	Yes
FCC : 15.247(b), IC : RSS 210 A8.2(b), section 2.2, 2.6 and 2.7	Transmitter Radiated Emissions	Yes
The digital circuit portion of the EUT has been tested and verified to comply with FCC Part 15, Subpart B, Class B Digital Devices (RSS GEN and RSS 210 of IC) and the associated Radio Receiver has also been tested and found to comply with Part 15, Subpart B – Radio Receivers (RSS GEN and RSS 210 of IC). The Receiver Test Report is available upon request.		

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 9 of 43

3.3 - Modifications Incorporated In The EUT For Compliance Purposes

None Yes (explain below)

3.4 - Deviations & Exclusions From Test Specifications

None Yes (explain below)

EXHIBIT 4. DECLARATION OF CONFORMITY

The EUT was found to MEET the requirements as described within the specification of FCC Title 47, CFR Part 15.247, and Industry Canada RSS-210, Issue 8 (2010), Annex 8 (section 8.1).

Note: If some emissions are seen to be within 3 dB of their respective limits; as these levels are within the tolerances of the test equipment and site employed, there is a possibility that this unit, or a similar unit selected out of production may not meet the required limit specification if tested by another agency.

LS Research, LLC certifies that the data contained herein was taken under conditions that meet or exceed the requirements of the test specifications. The results in this Test Report apply only to the item(s) tested on the above-specified dates. Any modifications made to the EUT subsequent to the indicated test date(s) will invalidate the data herein, and void this certification.

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report #: 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 10 of 43

EXHIBIT 5.RADIATED EMISSIONS TEST

5.1 - Test Setup

The test setup was assembled in accordance with Title 47, CFR FCC Part 15, RSS GEN and ANSI C63.4-2003. The EUT was placed on an 80cm high non-conductive pedestal, centered on a flush mounted 2-meter diameter turntable inside a 3 meter Semi-Anechoic, FCC listed Chamber. The EUT was operated in continuous transmit mode for final testing using power as provided by the AC mains. The unit has the capability to operate on 3 channels, controllable via push button at the bottom of the EUT.

The applicable limits apply at a 3 meter distance. Measurements above 4 GHz were performed at a 1.0 meter separation distance. The calculations to determine these limits are detailed in the following pages. Please refer to Appendix A for a complete list of test equipment. The test sample was operated on one of three (3) standard channels: low (903MHz), middle (914.6MHz) and high (926.4MHz) to comply with FCC Part 15.31(m). The channels and operating modes were changed via a single button at the bottom of the EUT.

5.2 - Test Procedure

Radiated RF measurements were performed on the EUT in a 3 meter Semi-Anechoic, FCC listed Chamber. The frequency range from 30 MHz to 10000 MHz was scanned and investigated. The radiated RF emission levels were manually noted at the various fixed degree settings of azimuth on the turntable and antenna height. The EUT was placed on a non-conductive pedestal in the 3 meter Semi-Anechoic Chamber, with the antenna mast placed such that the antenna was 3 meters from the EUT. A Biconical Antenna was used to measure emissions from 30 MHz to 300 MHz, and a Log Periodic Antenna was used to measure emissions from 300 MHz to 1000 MHz. A Double-Ridged Waveguide Horn Antenna was used from 1 GHz to 10 GHz. The maximum radiated RF emissions between 30MHz to 4 GHz were found by raising and lowering the sense antenna between 1 and 4 meters in height, using both horizontal and vertical antenna polarities. Between 4GHz to 10GHz, the sense antenna was raised and lowered between 1 and 1.8 meters in height.

The EUT was positioned in its intended orientation.

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report #: 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 11 of 43

5.3 - Test Equipment Utilized

A list of the test equipment and antennas utilized for the Radiated Emissions test can be found in Appendix A. This list includes calibration information and equipment descriptions. All equipment is calibrated and used according to the operation manuals supplied by the manufacturers. All calibrations of the antennas used were performed at a calibration laboratory accredited to ISO 17025, and are traceable to the SI standard. In addition, the Connecting Cables were measured for losses using a calibrated Signal Generator and an EMI Receiver. The resulting correction factors and the cable loss factors from these calibrations were entered into the EMI Receiver database. As a result, the data taken from the EMI Receiver accounts for the antenna correction factor as well as cable loss or other corrections, and can therefore be entered into the database as a corrected meter reading. The EMI Receiver was operated with a resolution bandwidth of 120 kHz for measurements below 1 GHz (video bandwidth of 300 kHz), and a bandwidth of 1 MHz for measurements above 1 GHz (video bandwidth of 1 MHz for peak measurements and video bandwidth of 10 Hz for average measurements). From 4 GHz to 10 GHz, a Spectrum Analyzer and an EMCO Horn Antenna were used.

5.4 - Test Results

The EUT was found to **MEET** the Radiated Emissions requirements of Title 47 CFR, FCC Part 15.247 and Canada RSS-210, Issue 8 (2010), Annex 8 for an FHSS transmitter. The frequencies with significant RF signal strength were recorded and plotted as shown in the Data Charts and Graphs.

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report #: 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 12 of 43

5.5 - Calculation of Radiated Emissions Limits and reported data.

Reported data:

For both fundamental and spurious emissions measurement, the data reported includes all necessary correction factors. These correction factors are loaded onto the EMI receiver when measurements are performed.

Reported Measurement data = Raw receiver measurement (dB μ V/m) + Antenna correction Factor + Cable factor (dB) + Miscellaneous factors when applicable (dB) – amplification factor when applicable (dB).

Generic example of reported data at 200 MHz:

Reported Measurement data = 18.2 (raw receiver measurement) + 15.8 (antenna factor) + 1.45 (cable factor) = 35.45 (dB μ V/m).

As specified in 15.247 (d) and RSS 210 A8.5, radiated emissions that fall within the restricted band described in 15.205(c) for FCC and section 2.2 of RSS 210 for IC, must comply with the general emissions limit.

The following table depicts the general radiated emission limits above 30 MHz. These limits are obtained from Title 47 CFR, Part 15.209, for radiated emissions measurements. These limits were applied to any signals found in the 15.205 restricted bands. The mentioned limits correspond to those limits listed in RSS GEN.

Frequency (MHz)	3 m Limit μ V/m	3 m Limit (dB μ V/m)	1 m Limit (dB μ V/m)
30-88	100	40.0	-
88-216	150	43.5	-
216-960	200	46.0	-
960-24,000	500	54.0	63.5

Sample conversion of field strength (μ V/m to dB μ V/m):
dB μ V/m = 20 log₁₀ (100) = 40 dB μ V/m (from 30-88 MHz)

For measurements made at 1.0 meter, a 9.5 dB correction has been invoked.

960 MHz to 10,000 MHz
500 μ V/m or 54.0 dB/ μ V/m at 3 meters
54.0 + 9.5 = 63.5 dB/ μ V/m at 1 meter

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 13 of 43

5.6 - Radiated Emissions Test Data Chart

Manufacturer:	Honeywell					
Date(s) of Test:	July 26 th to July 28 th 2011					
Project Engineer(s):	Khairul Aidi Zainal					
Test Engineer(s):	Khairul Aidi Zainal Peter Feilen					
Voltage:	110 VAC					
Operation Mode:	continuous transmit, modulated					
Environmental Conditions in the Lab:	Temperature: 70° F Relative Humidity: 34%					
EUT Power:	X	Single Phase 110VAC			3 Phase ____ VAC	
		Battery			Other: Bench DC supply	
EUT Placement:	X	80cm non-conductive pedestal			10cm Spacers	
EUT Test Location:	X	3 Meter Semi-Anechoic FCC Listed Chamber			3/10m OATS	
Measurements:		Pre-Compliance			Preliminary	X
Detectors Used:	X	Peak		X	Quasi-Peak	X
					Average	

The following table depicts the level of significant radiated emissions that are NOT radio related:

FREQ (MHz)	ANT	EUT	HEIGHT (cm)	AZIMUTH (°)	PEAK (dB μ V/m)	Q.PEAK (dB μ V/m)	AVERAGE (dB μ V/m)	LIMIT (dB μ V/m)	MARGIN (dB)
250.00	V	TT	1.00	0	35.7	32.9	30.6	46.0	13.1
125.00	V	TT	1.00	38	27.4	25.0	23.0	43.0	18.0
70.00	V	TT	1.00	300	26.1	22.9	16.6	40.0	17.1
49.99	V	TT	1.10	254	29.2	26.8	23.2	40.0	13.2
37.00	V	TT	1.00	0	28.7	24.6	14.4	40.0	15.4
625.00	H	TT	1.39	256	34.2	31.0	28.0	46.0	15.0
500.00	H	TT	1.62	120	42.4	40.5	38.4	46.0	5.5
700.00	H	TT	1.17	65	38.7	35.1	30.8	46.0	10.9
625.00	V	TT	2.02	0	39.6	37.9	36.3	43.0	5.1
500.00	V	TT	1.47	0	38.8	36.9	35.1	46.0	9.1
500.00	V	TT	1.00	228	40.4	38.5	34.4	46.0	7.5
250.00	H	TT	1.32	114	38.7	36.9	35.3	46.0	9.1
37.35	V	TT	1.24	303	36.9	33.6	23.8	40.0	6.4
50.44	V	TT	1.00	32	36.1	34.5	26.0	40.0	5.5
250.00	V	TT	2.43	271	37.7	35.9	34.4	46.0	10.1
125.00	V	TT	1.32	0	31.0	28.6	26.2	43.0	14.4

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 14 of 43

The following table depicts the level of significant radiated **harmonic** emissions of channel 903.0 MHz in the restricted band:

FREQ (MHz)	ANT	EUT	HEIGHT (cm)	AZIMUTH (°)	PEAK (dB μ V/m)	AVERAGE (dB μ V/m)	LIMIT (dB μ V/m)	MARGIN (dB)	EUT ANT
5418.00	H	TT	1.00	65	54.6	48.3	63.5	15.2	A
5418.00	V	TT	1.00	86	52.9	45.7	63.5	17.8	B
8127.00	H	TT	1.00	132	52.1	41.3	63.5	22.2	A
8127.00	H	TT	1.00	133	52.5	41.5	63.5	22.0	B
9030.00	V	TT	1.05	0	59.2	55.0	63.5	8.5	A
9030.00	V	TT	1.04	0	56.4	50.0	63.5	13.5	B

The following table depicts the level of significant radiated **harmonic** emissions of channel 914.6 MHz in the restricted band:

FREQ (MHz)	ANT	EUT	HEIGHT (m)	AZIMUTH (°)	PEAK (dB μ V/m)	AVERAGE (dB μ V/m)	LIMIT (dB μ V/m)	MARGIN (dB)	EUT ANT
7316.80	V	TT	1.12	115	52.7	43.5	63.5	20.0	A
7316.80	V	TT	1.05	112	51.7	42.3	63.5	21.2	B
8231.40	H	TT	1.00	136	53.6	41.9	63.5	21.6	A
8231.40	H	TT	1.00	135	51.9	42.1	63.5	21.4	B
9146.00	V	TT	1.03	0	56.7	52.0	63.5	11.5	A
9146.00	V	TT	1.04	0	55.3	49.2	63.5	14.3	B

The following table depicts the level of significant radiated **harmonic** emissions of channel 926.4 MHz in the restricted band:


FREQ (MHz)	ANT	EUT	HEIGHT (m)	AZIMUTH (°)	PEAK (dB μ V/m)	AVERAGE (dB μ V/m)	LIMIT (dB μ V/m)	MARGIN (dB)	EUT ANT
7411.20	V	TT	1.01	129	52.6	43.8	63.5	19.7	A
7411.20	V	TT	1.09	111	53.2	45.6	63.5	17.9	B
8337.60	H	TT	1.00	47	51.8	39.9	63.5	23.6	A
8337.60	H	TT	1.00	73	52.6	40.7	63.5	22.8	B

Notes:

1. Measurements above 4 GHz were made at 1 meters of separation from the EUT. The limits were adjusted to reflect this measurement distance.
2. H: Horizontal, V: Vertical, TT: Table Top.
3. Refer to exhibit 5.5 on explanation of how data is reported.

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 15 of 43

5.7 - Test Setup Photo(s) - Radiated Emissions Test

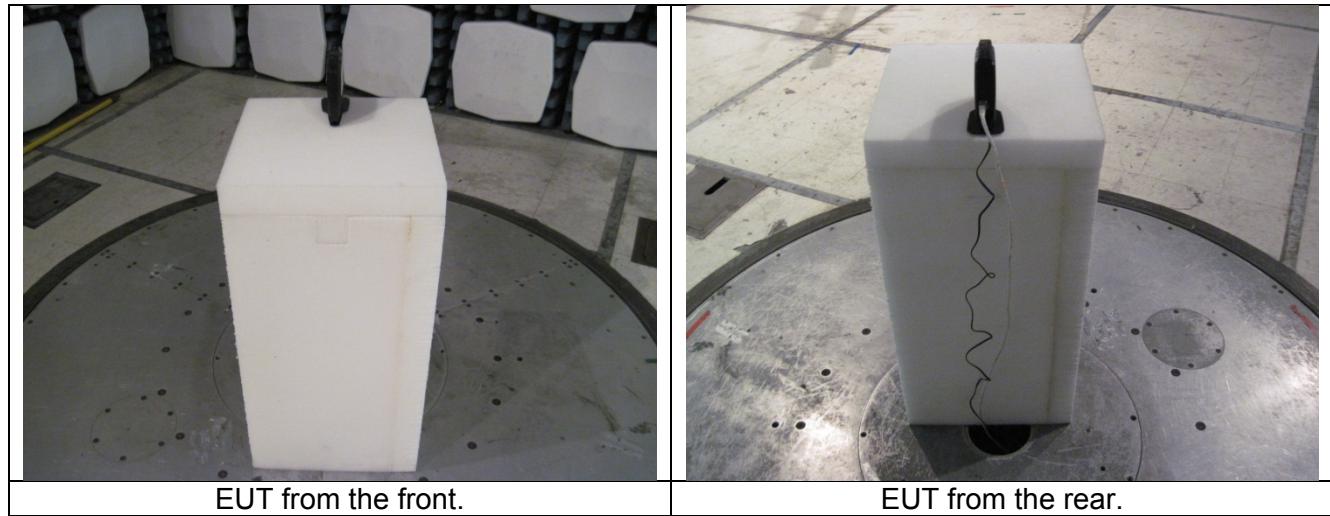

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report #: 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 16 of 43

EXHIBIT 6.CONDUCTED EMISSIONS TEST, AC POWER LINE

6.1 Test Setup

The test area and setup are in accordance with ANSI C63.4 and with Title 47 CFR, FCC Part 15, Industry Canada RSS-210 and RSS GEN. The EUT was placed on a non-conductive wooden table, with a height of 80 cm above the reference ground plane. The EUT was connected to a USB port of a generic laptop and set to transmit. The Generic laptop power supply was then plugged into a 50Ω (ohm), 50/250 μ H Line Impedance Stabilization Network (LISN). The AC power supply of 120V was provided via an appropriate broadband EMI Filter, and then to the LISN line input. Final readings were then taken and recorded. After the EUT was setup and connected to the LISN, the RF Sampling Port of the LISN was connected to a 10 dB Attenuator-Limiter, and then to EMI receiver System. The EMCO LISN used has the ability to terminate the unused port with a 50Ω (ohm) load when switched to either L1 (line) or L2 (neutral).

6.2 Test Procedure

The EUT was investigated in continuous modulated transmit mode for this portion of the testing. The appropriate frequency range and bandwidths were selected on the EMI Receiver, and measurements were made. The bandwidth used for these measurements is 9 kHz, as specified in CISPR 16-1, Section 1, Table 1, for Quasi-Peak and Average detectors in the frequency range of 150 kHz to 30 MHz. Final readings were then taken and recorded.

6.3 Test Equipment Utilized

A list of the test equipment and accessories utilized for the Conducted Emissions test is provided in Appendix A. This list includes calibration information and equipment descriptions. All equipment is calibrated and used according to the operation manuals supplied by the manufacturers. Calibrations of the LISN and Limiter were performed at an IEC/ISO 17025 accredited calibration laboratory, traceable to the SI standard. All cables are calibrated and checked periodically for conformance. The emissions are measured on the EMI System, which has automatic correction for all factors stored in memory and allows direct readings to be taken.

6.4 Test Results

The EUT was found to **MEET** the Conducted Emission requirements of FCC Part 15.207 and RSS GEN 7.2.2 for Conducted Emissions for an Intentional Radiator. See the Data Charts and Graphs for more details of the test results.

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 17 of 43

6.5 FCC Limits of Conducted Emissions at the AC Mains Ports

Frequency Range (MHz)	Class B Limits (dBμV)		Measuring Bandwidth
	Quasi-Peak	Average	
0.150 -0.50 *	66-56	56-46	RBW = 9 kHz VBW \geq 9 kHz for QP VBW = 1 Hz for Average
0.5 – 5.0	56	46	
5.0 – 30	60	50	

* The limit decreases linearly with the logarithm of the frequency in this range.

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report #: 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 18 of 43

6.6 CONDUCTED EMISSIONS TEST DATA CHART

Frequency Range inspected: 150 KHz to 30 MHz

Manufacturer:	Honeywell			
Date(s) of Test:	July 29 th 2011			
Project Engineer:	Khairul Aidi Zainal			
Test Engineer:	Khairul Aidi Zainal			
Voltage:	110 VAC			
Operation Mode:	Continuous transmit, modulated			
Environmental Conditions in the Lab:	Temperature: 70° F Relative Humidity: 34 %			
Test Location:	X	AC Mains Test area		Chamber
EUT Placed On:	X	40cm from Vertical Ground Plane		10cm Spacers
	X	80cm above Ground Plane		Other:
Measurements:		Pre-Compliance	Preliminary	X Final
Detectors Used:	Peak	X	Quasi-Peak	X Average

Frequency (MHz)	Line	QUASI-PEAK			AVERAGE		
		Q-Peak Reading (dB μ V)	Q-Peak Limit (dB μ V)	Quasi-Peak Margin (dB)	Average Reading (dB μ V)	Average Limit (dB μ V)	Average Margin (dB)
0.296	2.0	42.4	60.4	18.0	30.5	50.4	19.9
0.354	2.0	46.1	58.9	12.8	38.7	48.9	10.2
0.473	2.0	44.0	56.5	12.5	35.4	46.5	11.1
1.594	2.0	41.2	56.0	14.8	30.9	46.0	15.1
0.236	1.0	52.8	62.2	9.4	46.7	52.2	5.5
0.295	1.0	51.1	60.4	9.3	45.1	50.4	5.3
0.354	1.0	55.7	58.9	3.2	48.4	48.9	0.5
0.472	1.0	49.5	56.5	7.0	42.8	46.5	3.7
0.650	1.0	40.7	56.0	15.3	34.1	46.0	11.9
1.122	1.0	49.0	56.0	7.0	40.8	46.0	5.2

Notes:

- 1) The emissions listed are characteristic of the power supply used, and did not change by the EUT.

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 19 of 43


6.7 Test Setup Photo(s) – Conducted Emissions Test



Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 20 of 43

6.8 Screen Captures - Conducted Emissions Test

These screen captures represent Peak Emissions. For conducted emission measurements, both a Quasi-Peak detector function and an Average detector function are utilized. The emissions must meet both the Quasi-peak limit and the Average limit as described in 47 CFR 15.207 and RSS GEN 7.2.2 (Table 2).

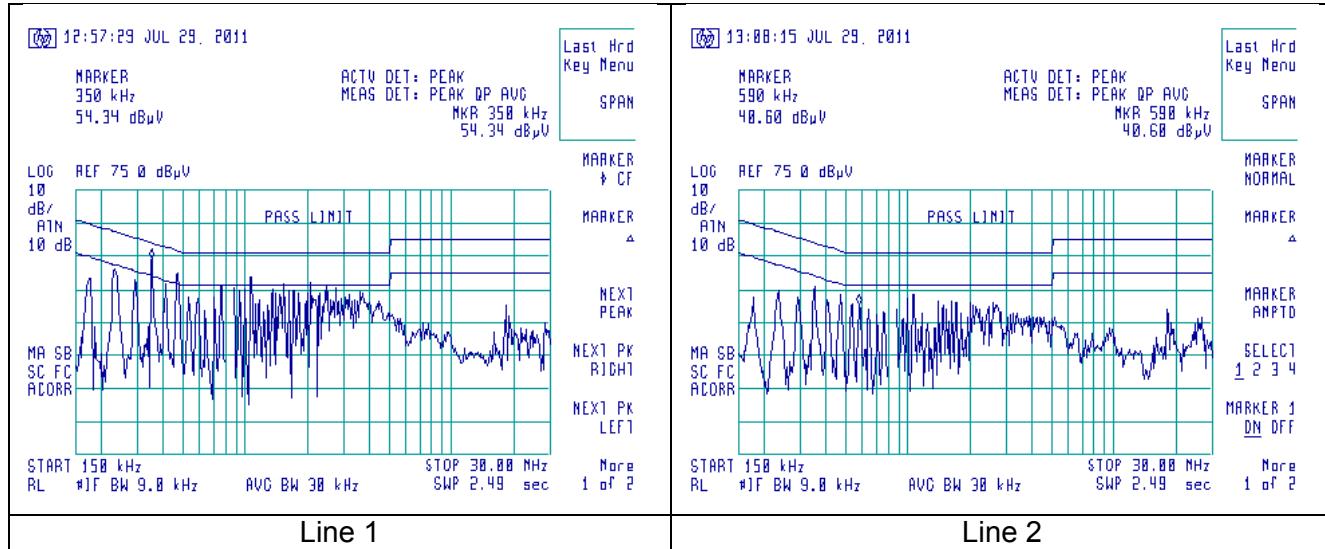

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 21 of 43

EXHIBIT 7. OCCUPIED BANDWIDTH

7.1 - Limits

For an FHSS system operating in the 902 to 928 MHz band, the maximum allowable 20dB bandwidth is 500 kHz.

7.2 - Method of Measurements

Industry Canada (IC RSS GEN 4.6.1) requires the measurement of the 99% bandwidth while CFR 47 part 15.247 requires the measurement of the 20dB bandwidth. For this portion of the tests, a direct measurement of the transmitted signal was performed at the antenna port of the EUT, via a cable connection to a spectrum analyzer. An attenuator was placed in series with the cable to protect the spectrum analyzer. The loss from the cable and the attenuator were added on the analyzer as gain offset settingsthere by allowing direct measurements, without the need for any further corrections. The EUT was configured to run in a continuous transmit mode, while being supplied with typical data as a modulation source. A bandwidth measurement function that is built into the spectrum analyzer was used to measure the appropriate bandwidths.

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 22 of 43


7.3 - Test Data

Channel (MHz)	99% Bandwidth (kHz)	20dB Bandwidth (kHz)
903.0	62.9	65.20
914.6	62.9	65.20
926.4	62.9	65.20

The closest 20dB bandwidth to the limit of 500 kHz is 65.2 kHz which is 434.8 kHz below the limit.


7.4-Screen Captures.

Low Channel

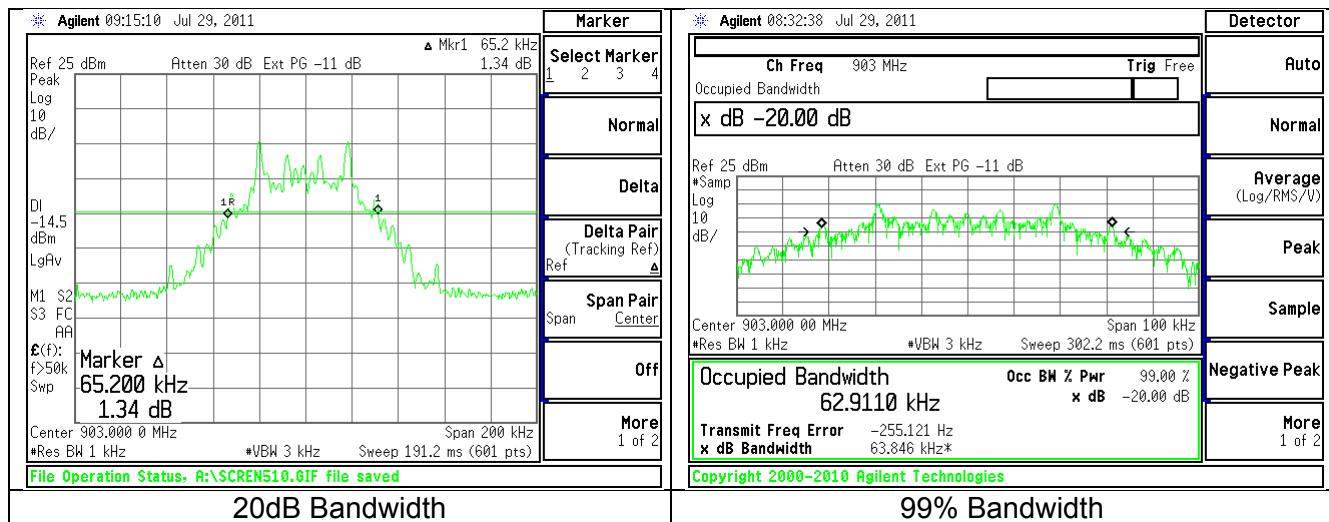


Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report #: 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 23 of 43

Middle Channel

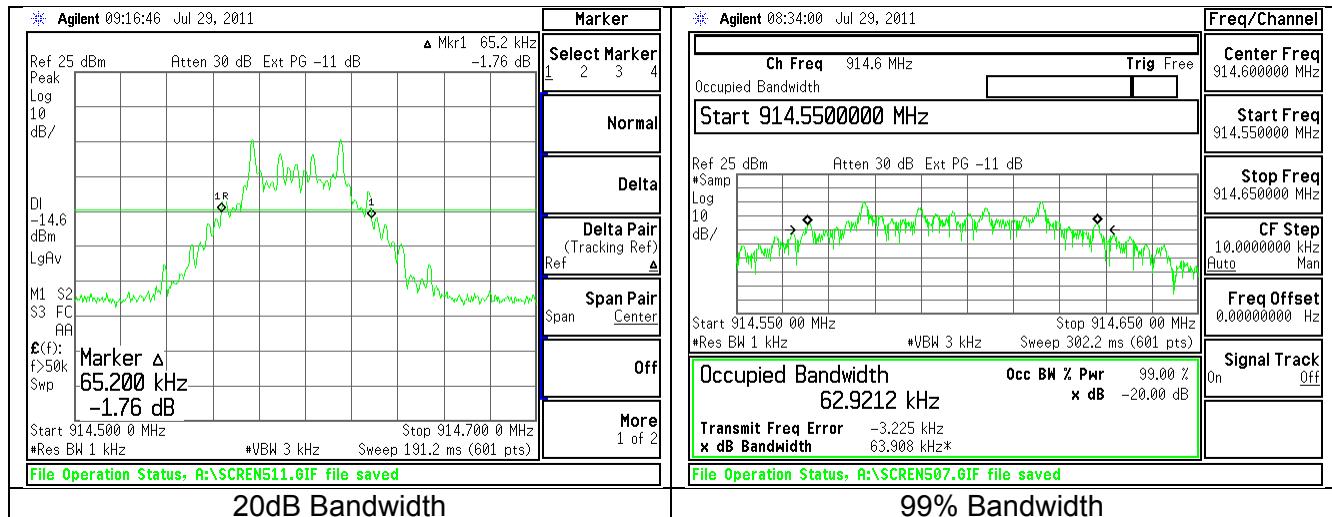

High Channel

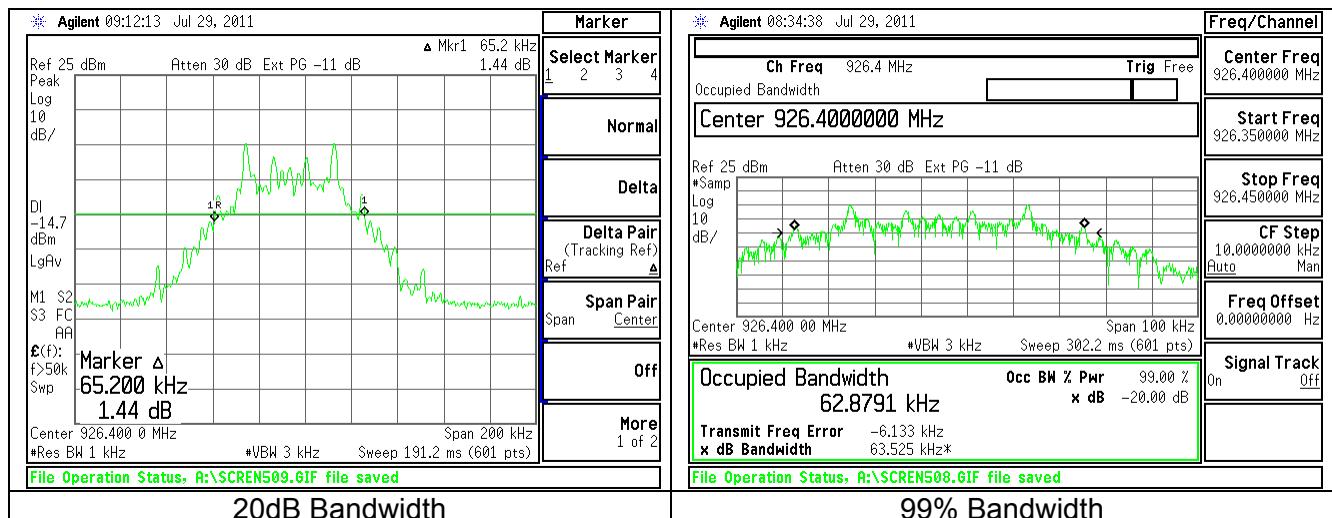

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 24 of 43

EXHIBIT 8. BAND EDGE MEASUREMENTS

8.1 - Method of Measurements

FCC 15.247(d) require a measurement of spurious emission levels to be at least 20 dB lower than the fundamental emission level, in particular at the Band-Edges where the intentional radiator operates. Also, RSS 210 Section 2.2 requires that unwanted emissions meet limits listed in RSS GEN and also to the limits in the applicable annex. The following screen captures demonstrate compliance of the intentional radiator at the 902 - 928 MHz Band-Edges. The EUT was operated in continuous transmit mode with continuous modulation, with internally generated data as the modulating source. The EUT was operated at the lowest channel for the investigation of the lower Band-Edge, and at the highest channel for the investigation of the higher Band-Edge.


The Band-edge measurements were performed conducted. The conducted measurement of band-edge was performed to satisfy FCC 15.247(d).

Conducted measurements of the spurious emission were performed with a measurement bandwidth of 100kHz.


Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report #: 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 25 of 43

8.2. Band edge captures.

A. Continuously transmitting and modulated.

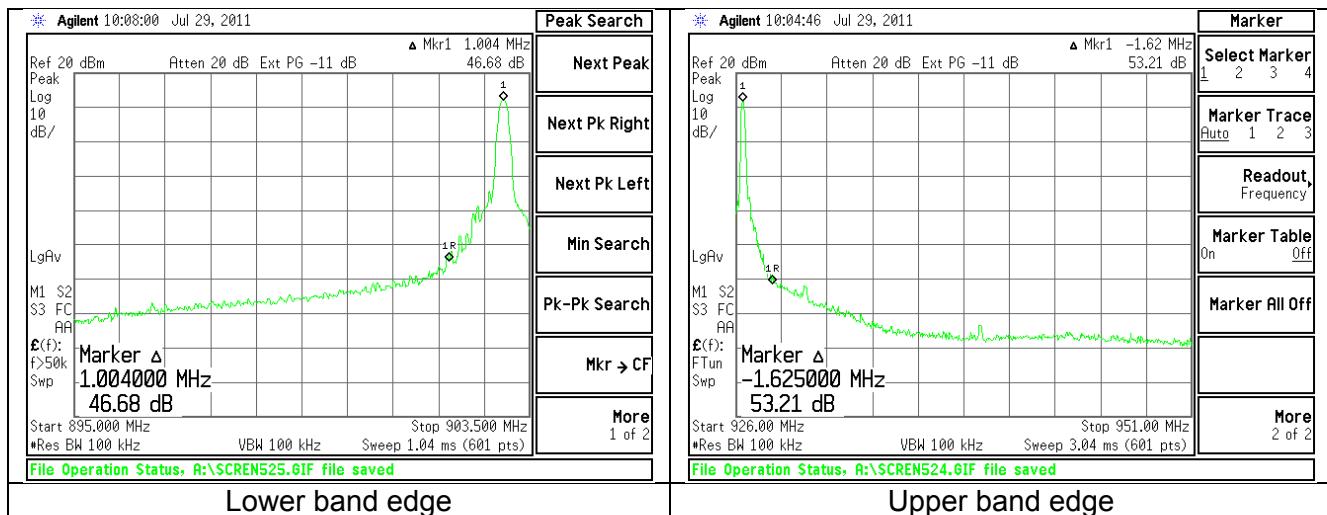

B. Hopping mode.

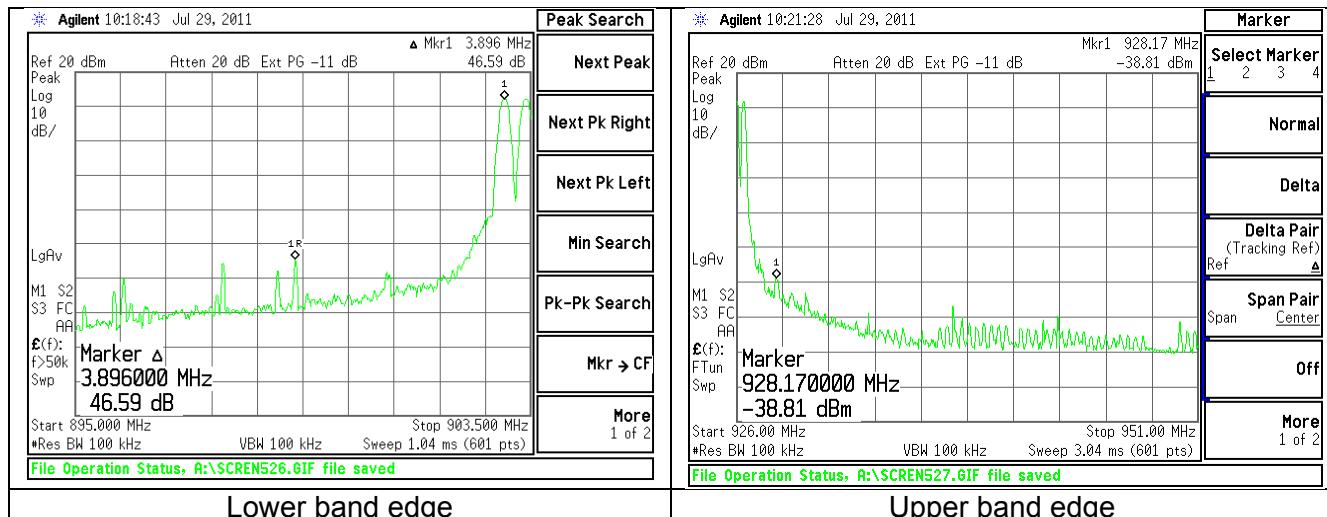

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 26 of 43

EXHIBIT 9. POWER OUTPUT (CONDUCTED): 15.247(b)


9.1 - Method of Measurements

The conducted RF output power of the EUT was measured at the antenna port using a short RF cable along with an attenuator as protection for the spectrum analyzer. The loss from the cable and the attenuator were added on the analyzer as gain offset settingsthere by allowing direct measurements without the need for any further corrections. The unit was configured to run in a continuous transmit mode, while being supplied with typical data as a modulation source. The spectrum analyzer was used with the appropriate resolution bandwidth, with measurements from a peak detector presented in the chart below.

9.2 - Test Data


Chan (MHz)	Power (dBm) (dBm)	Limit (dBm)	Margin (dB)
903.0	11.8	30	18.2
914.6	11.7	30	18.3
926.4	11.6	30	18.4

9.3-Screen Captures.

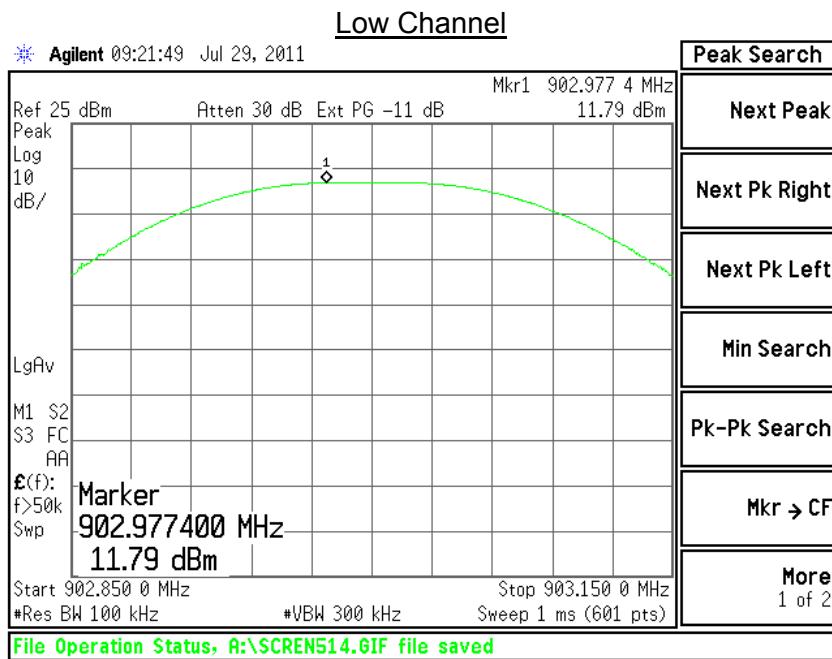


Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 27 of 43

Middle Channel

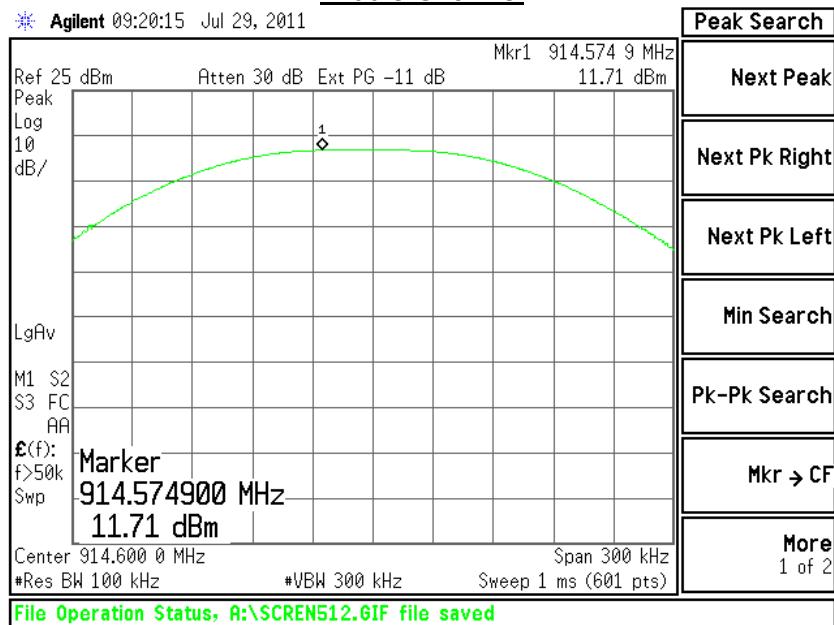

High Channel

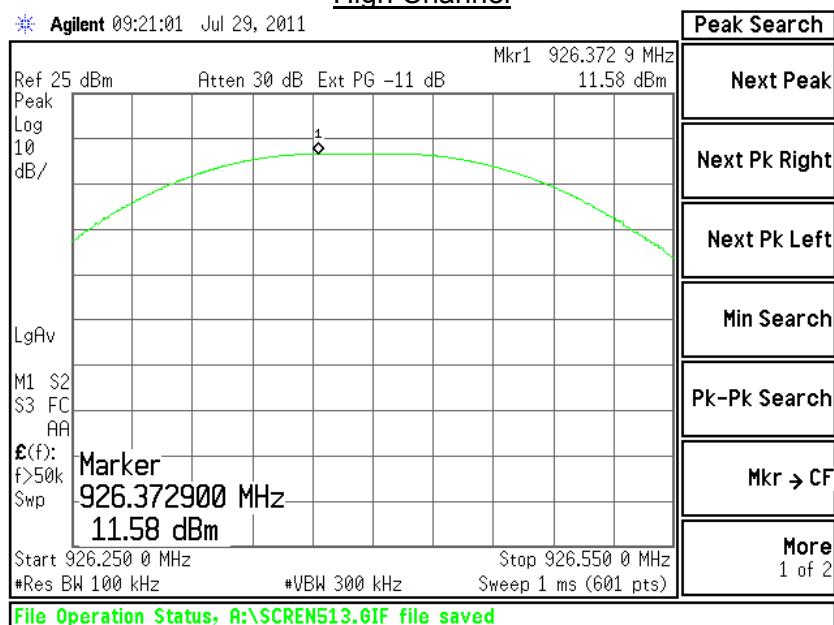

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 28 of 43

EXHIBIT 10.CONDUCTED SPURIOUS EMISSIONS: 15.247(d)

10.1 - Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 db below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

10.2 - Conducted Harmonic And Spurious RF Measurements

FCC Part 15.247(d) and IC RSS 210 A8.5 both requirea measurement of conducted harmonic and spurious RF emission levels, as reference to the carrier level when measured in a 100 kHz bandwidth. For this test, the spurious and harmonic RF emissions from the EUT were measured at the EUT antenna port using a short RF cable along with an attenuator as protection for the spectrum analyzer. The loss from the cable and the attenuator were added on the analyzer as gain offset settings, thereby allowing direct readings of the measurements made without the need for any further corrections. A spectrum analyzer was used with the resolution bandwidth set to 100 kHz for this portion of the tests. The unit was configured to run in a continuous transmit mode, while being supplied with typical data as a modulation source. The spectrum analyzer was used with measurements from a peak detector presented in the chart below. Screen captures were acquired and any noticeable spurious and harmonic signals were identified and measured.

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report #: 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 29 of 43

10.3 - Test Data

	Channel low	Channel middle	Channel high
Fundamental	11.8	11.7	11.6
2 nd Harmonic	-43.3	-41.9	-44.6
3 rd Harmonic	-67.5	-66.9	-67.6
4 th Harmonic	Note 2	Note 2	Note 2
5 th Harmonic	-68.8	-68.1	-69.2
6 th Harmonic	-63.3	-63.2	-63.5
7 th Harmonic	-58.2	-58.6	-59.1
8 th Harmonic	-49.3	-50.1	-50.1
9 th Harmonic	-63.8	-63.6	-64.2
10 th Harmonic	-59.8	-59.5	-60.1

Note:



1. All reported data are in dBm.
2. Spurious emission buried within system noise floor.

The table below lists other notable spurious emissions other than the harmonics.


Freq(MHz)	Chan	level(dBm)
169.00	HI	-48.6
745.20	MID	-49.7

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 30 of 43

10.4-Screen Captures - Spurious Radiated Emissions

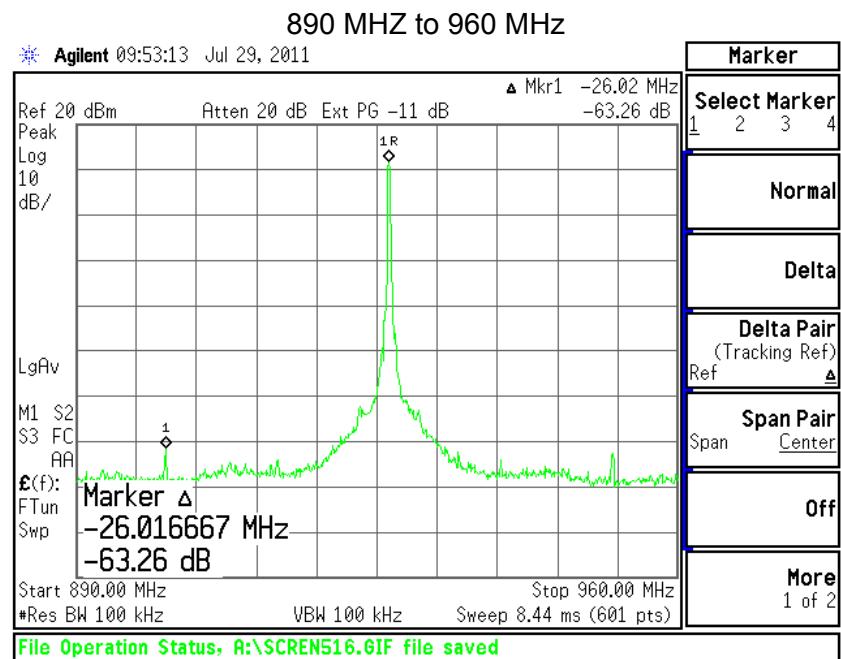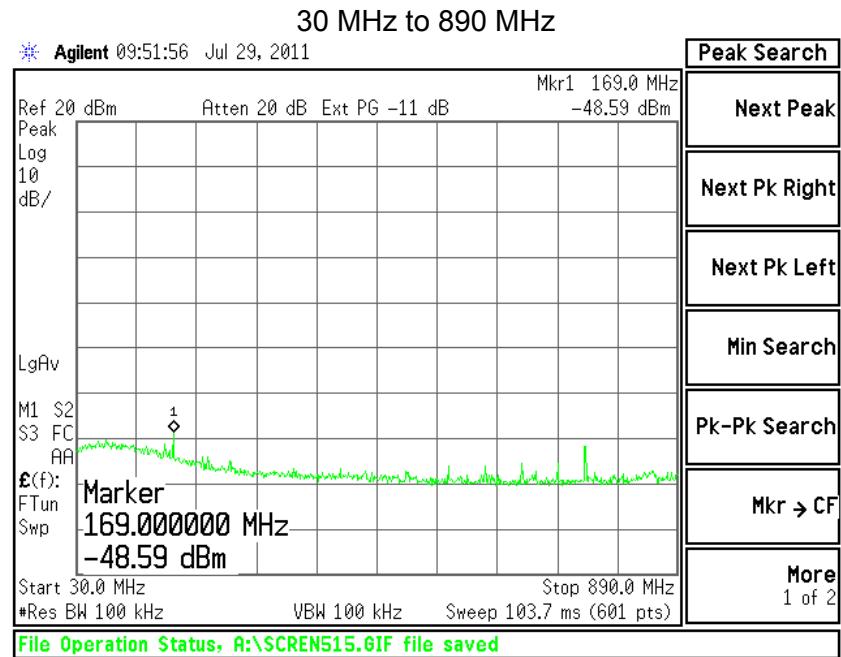

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report #: 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 31 of 43

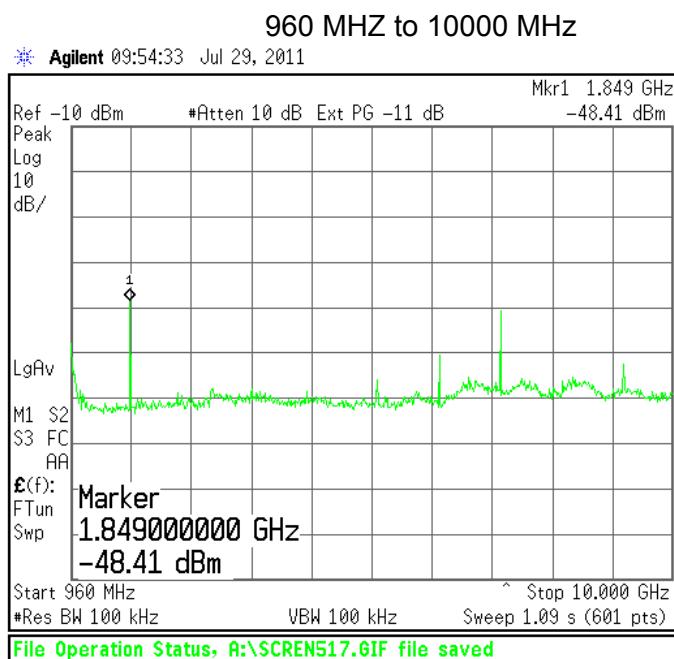

Peak Search
Next Peak
Next Pk Right
Next Pk Left
Min Search
Pk-Pk Search
Mkr → CF
More
 1 of 2

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 32 of 43

EXHIBIT 11.FREQUENCY & POWER STABILITY OVER VOLTAGE VARIATIONS

The power and frequency stability of the device was examined as a function of the input voltage available to the EUT. A Spectrum Analyzer was used to measure the power and frequency at the appropriate frequency markers. Power was supplied by an external bench-type AC power supply and was varied $\pm 15\%$ from the nominal.

93.5 VAC		110.0 VAC		126.5 VAC	
Power (dBm)	Frequency (Hz)	Power (dBm)	Frequency (Hz)	Power (dBm)	Frequency (Hz)
11.8	903007850	11.8	903007900	11.8	903007900
11.4	914605099	11.7	914605074	11.6	914605087
11.7	926402212	11.6	926402225	11.6	926402300

The table below shows the frequency drift on each channel:

Channel	max	min	freq drift (Hz)
LOW	903007900	903007850	50
MID	914605099	914605074	25
HIGH	926402300	926402212	88

The power was then cycled On/Off to observe system response. No unusual response was observed, the emission characteristics were well behaved, and the system returned to the same state of operation as before the power cycle.

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 33 of 43

EXHIBIT 12. CHANNEL PLAN AND SEPARATION

A spectrum analyzer was used with a resolution bandwidth of 100 kHz to measure the channel separation of the EUT.


RANGE (MHz)	# OF CHANS	Separation (kHz)
902 - 907	10.5	400.00
907 - 912	8.5	408.00
912 - 917	11.0	792.00
917 - 922	12.5	408.00
922 - 928	7.5	400.00

Total Chans	50.0
Max separation	792.0
Min Separation	400.0

The maximum and minimum channel-separations measured for this device are 792 kHz and 400 kHz respectively. The maximum 20dB bandwidth of the device, as reported in the previous section is 65.2 kHz. The following plots describe this spacing, and also establish the channel separation and plan.



This EUT also satisfies the minimum number of hopping channels which is 50.

12.1 - Screen Captures – Channel Separation

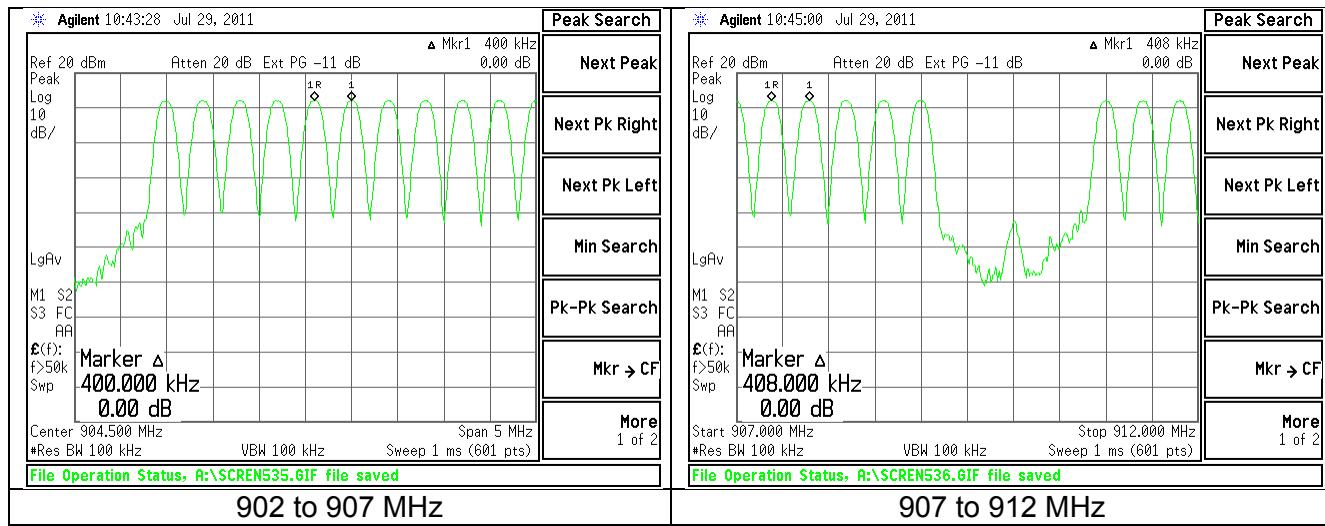

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report #: 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 34 of 43

Screen Captures – Channel Separation (continued)

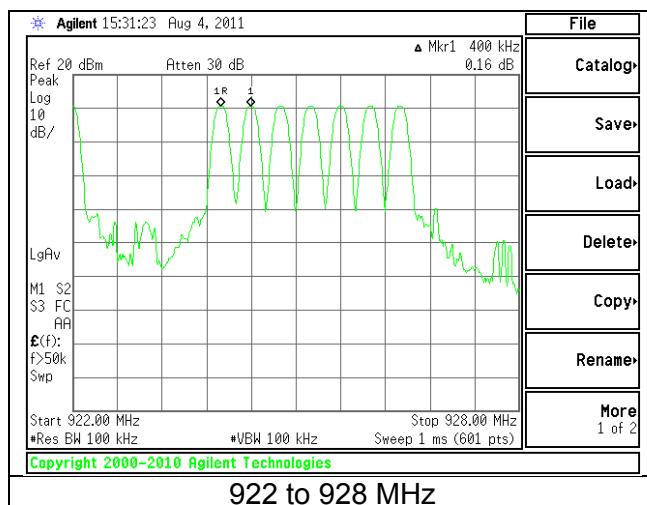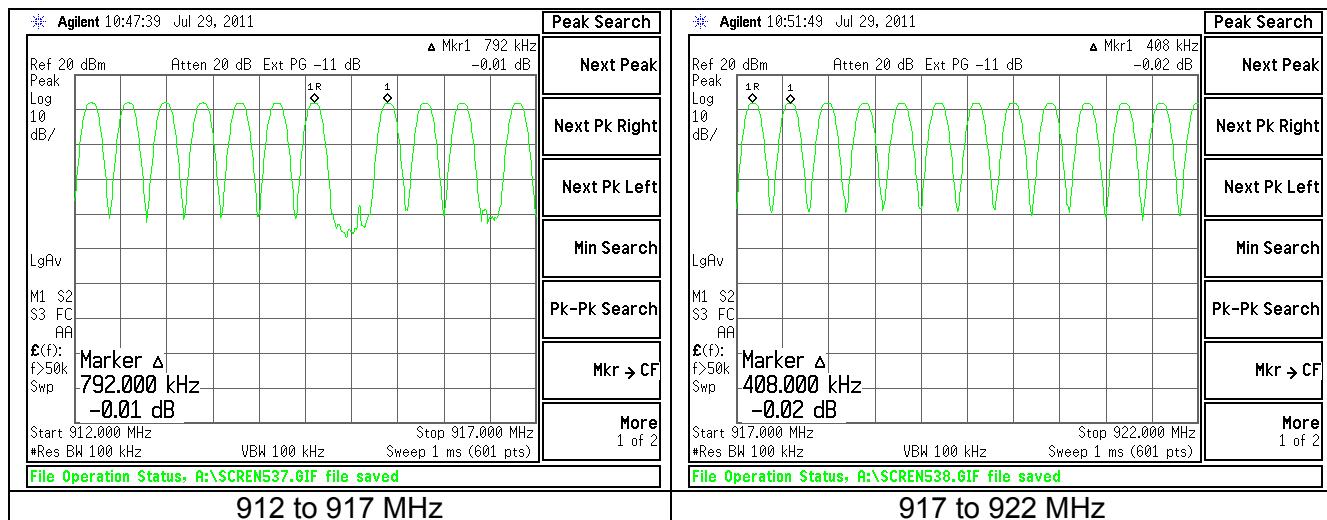


Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 35 of 43

EXHIBIT 13.CHANNEL OCCUPANCY.


Part 15.247(a)(1)(i) requires an average channel occupancy, for this device, of no more than 400 milliseconds in a 20second window .The channel occupancy for this EUT was measured using a spectrum analyzer, set to zero-span at the frequency of interest. With the analyzer in peak-hold mode, the transmission lengths can be measured by adjusting the sweep rate of the analyzer. A suitable sweep rate was used to measure the channel occupancy at the low, mid and high channels. The longest time any transmission will occur on a single channel is **207.75ms**.The maximum occupancy in a **20** second window is **1** (one) transmission cycle which translates to **207.75ms**.

13.1 Time occupancy captures.

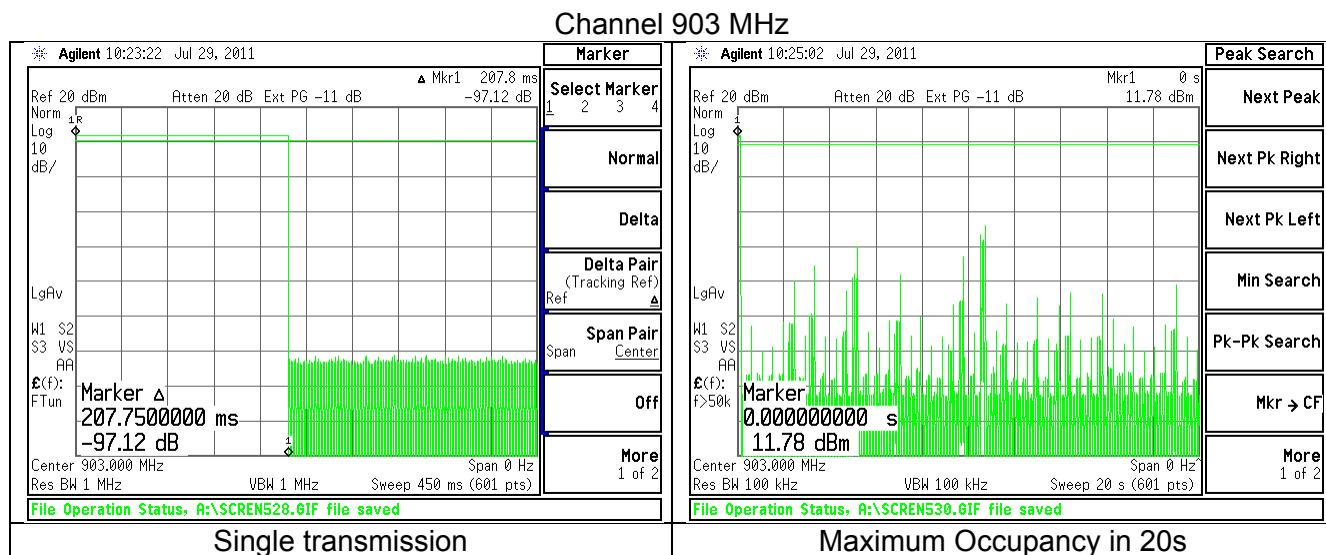


Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 36 of 43

Channel 914.6 MHz

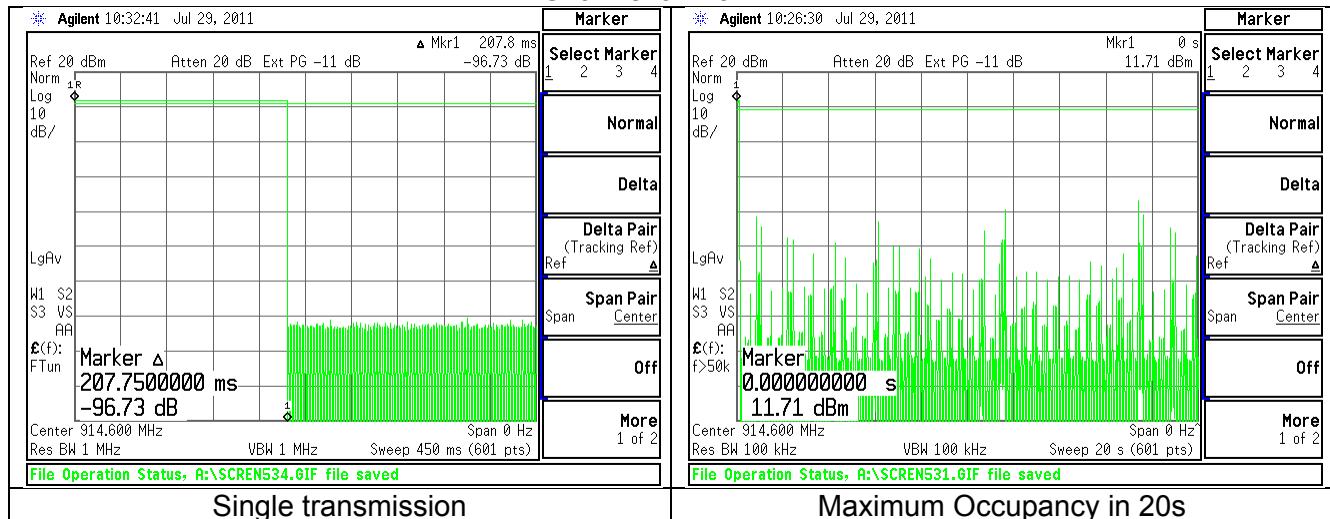

Channel 926.4 MHz

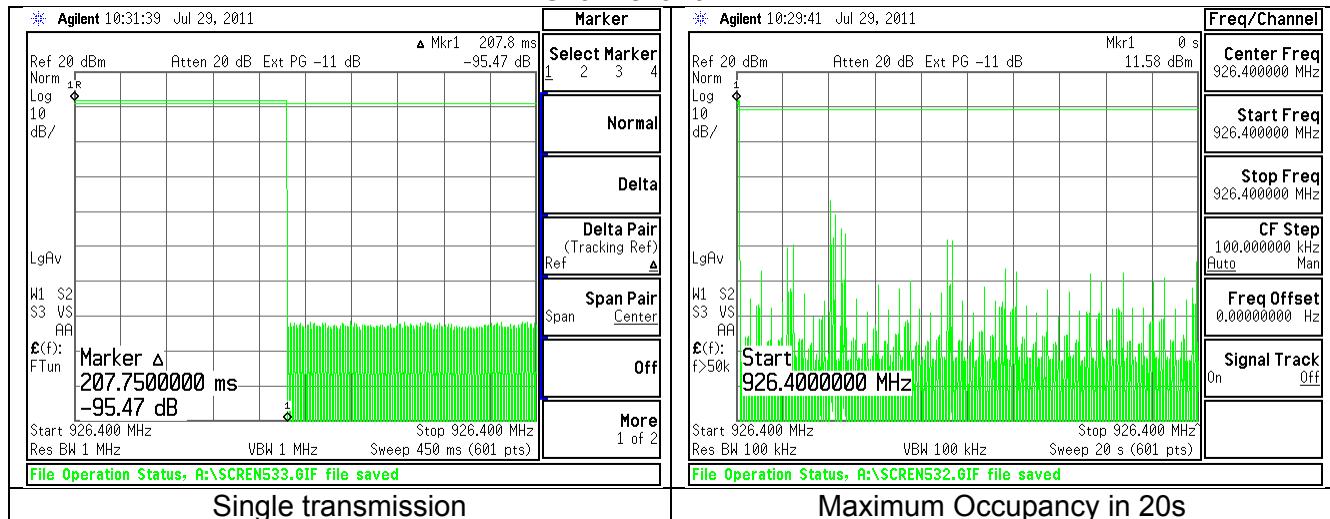

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 37 of 43

EXHIBIT 14.RECEIVER SYNCHRONIZATION AND INPUT BANDWIDTH.

Note: This section is provided by the manufacturer.

At the core of the radio block is an integrated transceiver, CC1101 manufactured by Texas Instruments. The CC1101 is configured by the RF protocol microcontroller to operate at frequencies as determined by a frequency sequencing algorithm. The bandwidth, transmit power, and modulation rate and type are set identically for all of the 50 frequencies utilized by this system. The protocol microcontroller provides the commissioned network with a synchronization signal periodically.

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report #: 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 38 of 43

EXHIBIT 15. MPE CALCULATIONS

The following MPE calculations are based on a measured conducted peak output power of +11.8dBm as presented to the antenna. The peak gain of this antenna based on the antenna data sheet is -1.0 dBi.

<u>Prediction of MPE limit at a given distance</u>	
Equation from page 18 of OET Bulletin 65, Edition 97-01	
$S = \frac{PG}{4\pi R^2}$	
where:	S = power density
	P = power input to the antenna
	G = power gain of the antenna in the direction of interest relative to an isotropic radiator
	R = distance to the center of radiation of the antenna
Maximum peak output power at antenna input terminal:	11.80 (dBm)
Maximum peak output power at antenna input terminal:	15.136 (mW)
Antenna gain(typical):	-1 (dBi)
Maximum antenna gain:	0.794 (numeric)
Prediction distance:	20 (cm)
Prediction frequency:	914 (MHz)
MPE limit for uncontrolled exposure at prediction frequency:	0.6 (mW/cm ²)
Power density at prediction frequency:	0.002392 (mW/cm ²)
Maximum allowable antenna gain:	23.0 (dBi)
Margin of Compliance at 20 cm =	24.0 dB

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 39 of 43

APPENDIX A - Test Equipment List



Date : 27-Jun-2011

Type Test : time occupancy

Job # : C-1232

Prepared By: AIDI

Customer : Honeywell

Quote #: 311121

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE 960073	Spectrum Analyzer	Agilent	E4446A	US45300564	9/22/2010	9/22/2011	Active Calibration

Project Engineer: Aidi

Quality Assurance: Peter



Date : 27-Jun-2011

Type Test : CONDUCTED Spur Emiss

Job # : C-1232

Prepared By: AIDI

Customer : Honeywell

Quote #: 311121

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE 960073	Spectrum Analyzer	Agilent	E4446A	US45300564	9/22/2010	9/22/2011	Active Calibration

Project Engineer: Aidi

Quality Assurance: Peter



Date : 27-Jun-2011

Type Test : Channel spacing

Job # : C-1232

Prepared By: AIDI

Customer : Honeywell

Quote #: 311121

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE 960073	Spectrum Analyzer	Agilent	E4446A	US45300564	9/22/2010	9/22/2011	Active Calibration

Project Engineer: AIDI

Quality Assurance: PETER



Date : 27-Jun-2011

Type Test : Conducted Power Output

Job # : C-1232

Prepared By: AIDI

Customer : Honeywell

Quote #: 311121

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE 960073	Spectrum Analyzer	Agilent	E4446A	US45300564	9/22/2010	9/22/2011	Active Calibration

Project Engineer: AIDI

Quality Assurance: PETER

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 40 of 43



Date : 27-Jun-2011

Type Test : Occupied Bandwidth (99%)

Job # : C-1232

Prepared By: AIDI

Customer : Honeywell

Quote # : 311121

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE 960073	Spectrum Analyzer	Agilent	E4446A	US45300564	9/22/2010	9/22/2011	Active Calibration

Project Engineer: AIDI

Quality Assurance: PETER



Date : 27-Jun-2011

Type Test : Band-Edge

Job # : C-1232

Prepared By: AIDI

Customer : Honeywell

Quote # : 311121

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE 960073	Spectrum Analyzer	Agilent	E4446A	US45300564	9/22/2010	9/22/2011	Active Calibration

Project Engineer: AIDI

Quality Assurance: PETER



Date : 27-Jun-2011

Type Test : Conducted Emissions

Job # : C-1232

Prepared By: AIDI

Customer : Honeywell

Quote # : 311121

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE 960013	EMI Receiver	HP	8546A System	3617A00320;3448A	10/29/2010	10/29/2011	Active Calibration
2	EE 960014	EMI Receiver-filter section	HP	85460A	3448A00296	10/29/2010	10/29/2011	Active Calibration
3	AA 960072	Transient Limiter	HP	11947A	3107A02515	10/8/2010	10/8/2011	Active Calibration
4	AA 960008	LISN	EMCO	3816/2NM	9701-1057	1/4/2011	1/4/2012	Active Calibration

Project Engineer: AIDI

Quality Assurance: PETER



Date : 27-Jun-2011

Type Test : Tx radiated spurs

Job # : C-1232

Prepared By: AIDI

Customer : Honeywell

Quote # : 311121

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE 960157	3Hz-13.2GHz Spectrum Analyzer	Agilent	E4445A	MY48250225	6/6/2011	6/6/2012	Active Calibration
2	EE 960158	RF Preselector	Agilent	N9039A	MY46520110	6/11/2011	6/11/2012	Active Calibration
3	AA 960150	Bicon Antenna	ETS	3110B	0003-3346	10/19/2010	10/19/2011	Active Calibration
4	AA 960078	Log Periodic Antenna	EMCO	93146	9701-4855	10/19/2010	10/19/2011	Active Calibration
5	AA 960007	Double Ridge Horn Antenna	EMCO	3115	9311-4138	4/27/2011	4/27/2012	Active Calibration
6	EE 960160	0.8-21GHz LNA	Mini-Circuits	ZVA-213X-S+	977711030	4/27/2011	4/27/2012	Active Calibration
7	AA 960155	900MHz High Pass Filter	KVM	HFP-L-14185	7272-03	2/28/2011	2/28/2012	Active Calibration
8	EE 960147	Pre-Amp	Adv. Micro	WLA612	123101	1/4/2011	1/4/2012	Active Calibration
9	EE 960073	Spectrum Analyzer	Agilent	E4446A	US45300564	9/22/2010	9/22/2011	Active Calibration
10	AA 960155	900MHz High Pass Filter	KVM	HFP-L-14185	7272-03	2/28/2011	2/28/2012	Active Calibration
11	AA 960081	Double Ridge Horn Antenna	EMCO	3115	6907	1/4/2011	1/4/2012	Active Calibration
12	AA 960144	Phaseflex	Gore	EKD01D010720	5800373	6/1/2011	6/1/2012	Active Calibration

Project Engineer: AIDI

Quality Assurance: PETER

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report #: 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 41 of 43

APPENDIX B - Test Standards:CURRENT PUBLICATION DATES RADIO

STANDARD #	DATE	Am. 1	Am. 2
ANSI C63.4	2003		
ANSI C63.10	2009		
CISPR 11	2009-05	2009-12 P	
CISPR 12	2007-05		
CISPR 14-1	2005-11	2008-11	
CISPR 14-2	2001-11	2001-11	2008-05
CISPR 16-1-1 Note 1	2010-01		
CISPR 16-1-2 Note 1	2003	2004-04	2006-07
CISPR 22	2008-09		
CISPR 24	1997-09	2001-07	2002-10
EN 55011	2009		
EN 55014-1	2006		
EN 55014-2	1997		
EN 55022	2006	2007	
EN 60601-1-2	2007-03		
EN 61000-3-2	2006-05		
EN 61000-3-3	2008-12		
EN 61000-4-2	2009-05		
EN 61000-4-3	2006-07	2008-05	
EN 61000-4-4	2004		
EN 61000-4-5	2006-12		
EN 61000-4-6	2009-05		
EN 61000-4-8	1994	2001	
EN 61000-4-11	2004-10		
EN 61000-6-1	2007-02		
EN 61000-6-2	2005-12		
EN 61000-6-3	2007-02		
EN 61000-6-4	2007-02		
FCC 47 CFR, Parts 0-15, 18, 90, 95	2009		
FCC Public Notice DA 00-1407	2000		
FCC ET Docket # 99-231	2002		
FCC Procedures	2007		
ICES 001	2006-06		
ICES 002	2009-08		
ICES 003	2004-02		
IEC 60601-1-2 Note 1	2007-03		
IEC 61000-3-2	2005-11	2008-03	2009-02
IEC 61000-3-3	2008-06		
IEC 61000-4-2	2008-12		
IEC 61000-4-3	2008-04	incl in 2008-04	2009-12 FD

Note 1: Test not on LSR Scope of Accreditation.

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 42 of 43

APPENDIX C - Uncertainty Statement

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level, using a coverage factor of k=2.

Table of Expanded Uncertainty Values, (K=2) for Specified Measurements

Measurement Type	Particular Configuration	Uncertainty Values
Radiated Emissions	3 – Meter chamber, Biconical Antenna	4.24 dB
Radiated Emissions	3-Meter Chamber, Log Periodic Antenna	4.8 dB
Radiated Emissions	10-Meter OATS, Biconical Antenna	4.18 dB
Radiated Emissions	10-Meter OATS, Log Periodic Antenna	3.92 dB
Conducted Emissions	Shielded Room/EMCO LISN	1.60 dB
Radiated Immunity	3 Volts/Meter in 3-Meter Chamber	1.128 Volts/Meter
Conducted Immunity	3 Volts level	1.0 V

Prepared For: Honeywell	EUT: RedLINK Internet Gateway	LS Research, LLC
Report # 311121	Model #: THM6000R	Template: 15.247 FHSS template
LSR Job #: C-1232	Serial #: 56502015004010 Radiated measurements. 37637015000344 Conducted measurements	Page 43 of 43