
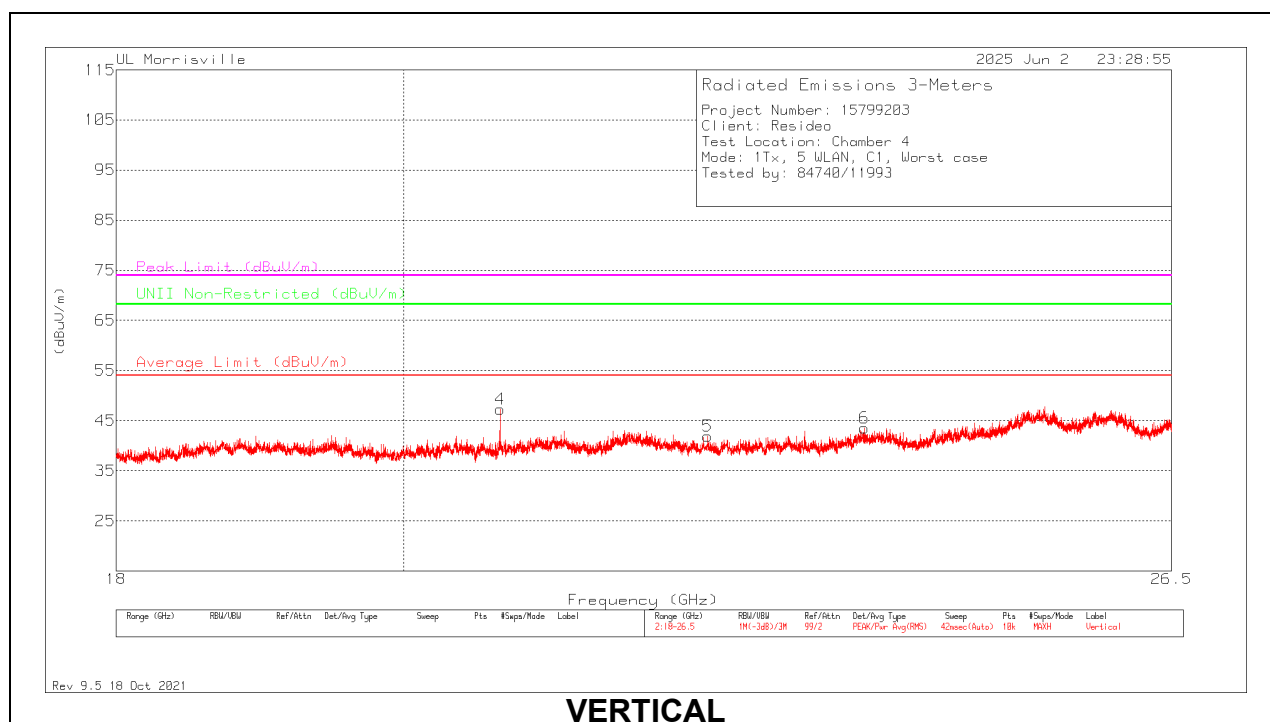


10.2.6. SPURIOUS EMISSIONS 18-26 GHz (ANTENNA 2)

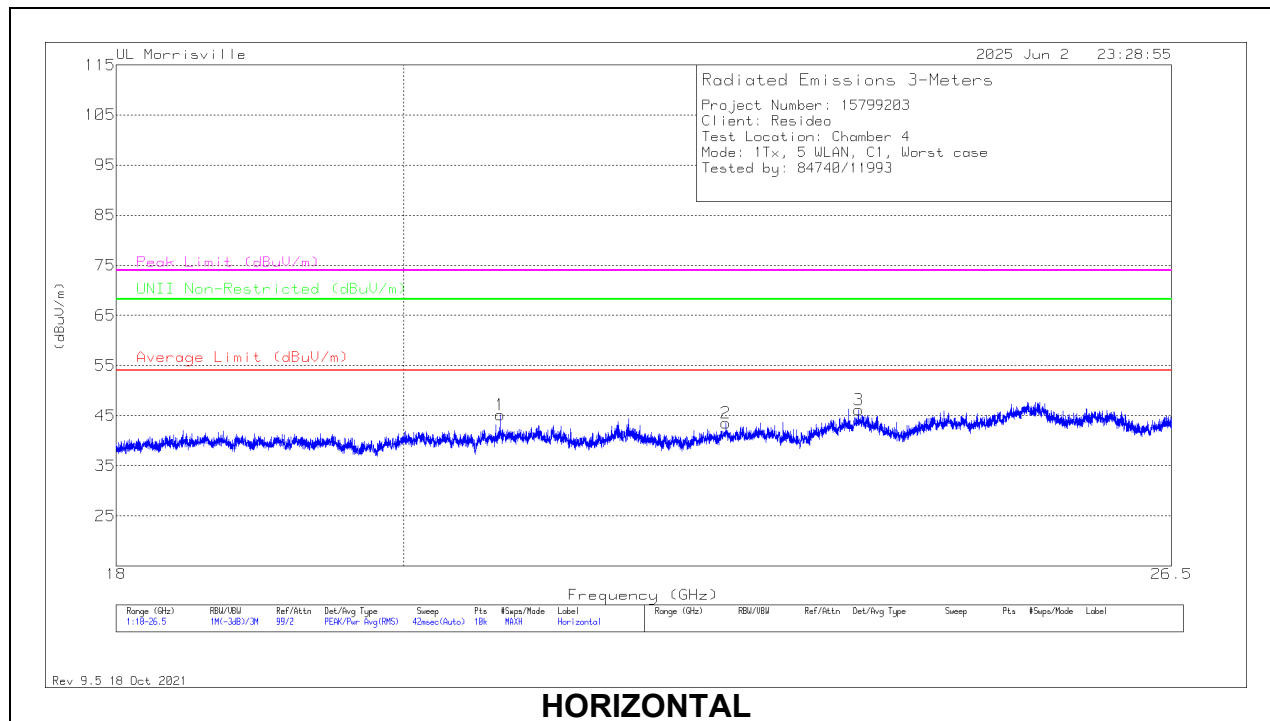

18 – 26GHz Data



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	204704 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 20.71973	51.75	Pk	33.6	-40.2	45.15	54	-8.85	74	-28.85	-	-	0-360	150	H
2	* ** 22.5071	48.75	Pk	34.2	-39.4	43.55	54	-10.45	74	-30.45	-	-	0-360	100	H
3	* ** 23.62899	50	Pk	34.6	-38.4	46.2	54	-7.8	74	-27.8	-	-	0-360	100	H
4	* ** 20.71973	53.9	Pk	33.6	-40.2	47.3	54	-6.7	74	-26.7	-	-	0-360	300	V
5	* ** 22.35751	47.84	Pk	34.1	-40	41.94	54	-12.06	74	-32.06	-	-	0-360	300	V
6	* ** 23.67658	47.85	Pk	34.5	-38.8	43.55	54	-10.45	74	-30.45	-	-	0-360	300	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

10.2.7. SPURIOUS EMISSIONS 26-40 GHz (ANTENNA 1)

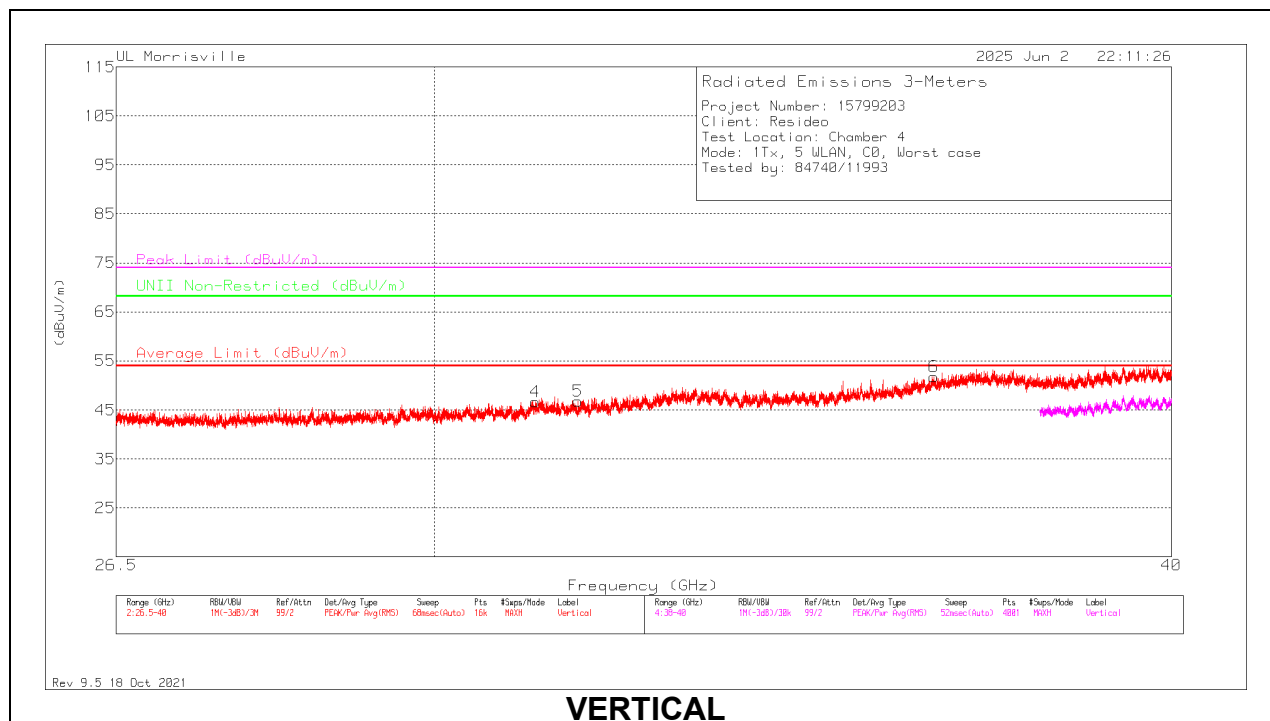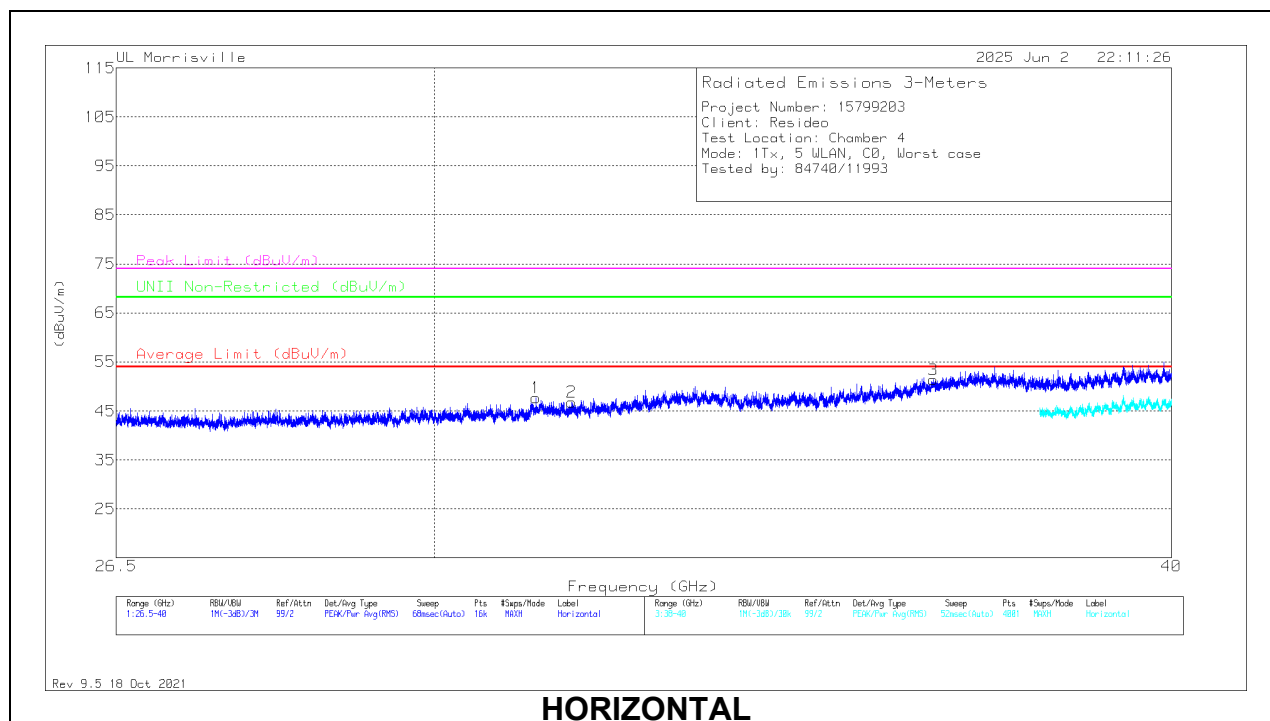

26 – 40GHz Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	204705 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 31.21542	44.06	Pk	36.9	-33.3	0	47.66	54	-6.34	74	-26.34	-	-	0-360	300	H
2	* ** 31.6533	42.85	Pk	36.9	-33	0	46.75	54	-7.25	74	-27.25	-	-	0-360	250	H
3	* ** 36.45359	49.62	PK-U	37.9	-34.1	0	53.42	-	-	74	-20.58	-	-	286	354	H
	* ** 36.45287	35.76	ADV	37.9	-34.1	.2	39.76	54	-14.24	-	-	-	-	286	354	H
4	* ** 31.20783	42.99	Pk	36.9	-33.2	0	46.69	54	-7.31	74	-27.31	-	-	0-360	100	V
5	* ** 31.72923	43.55	Pk	37	-33.8	0	46.75	54	-7.25	74	-27.25	-	-	0-360	200	V
6	* ** 36.45762	49.63	PK-U	37.9	-34.2	0	53.33	-	-	74	-20.67	-	-	212	370	V
	* ** 36.45683	35.76	ADV	37.9	-34.2	.2	39.66	54	-14.34	-	-	-	-	212	370	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

PK-U - Maximum Peak

ADV - Linear Voltage Average

10.2.8. SPURIOUS EMISSIONS 26-40 GHz (ANTENNA 2)

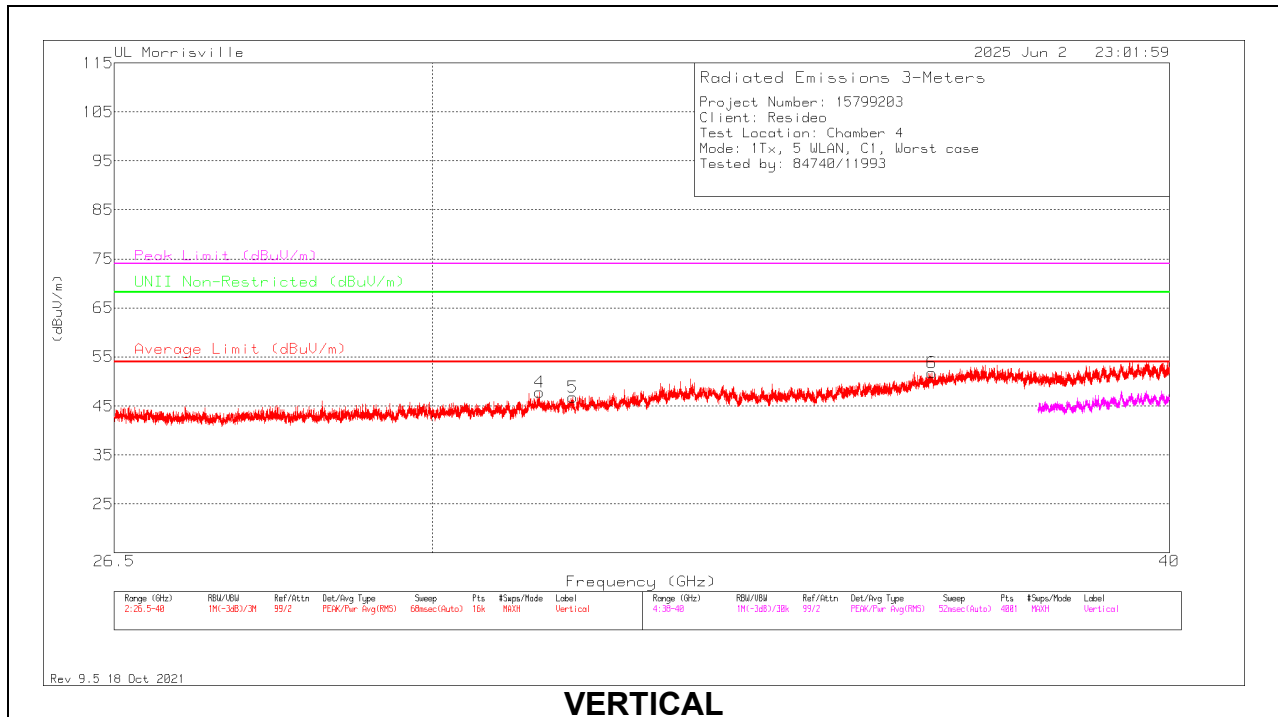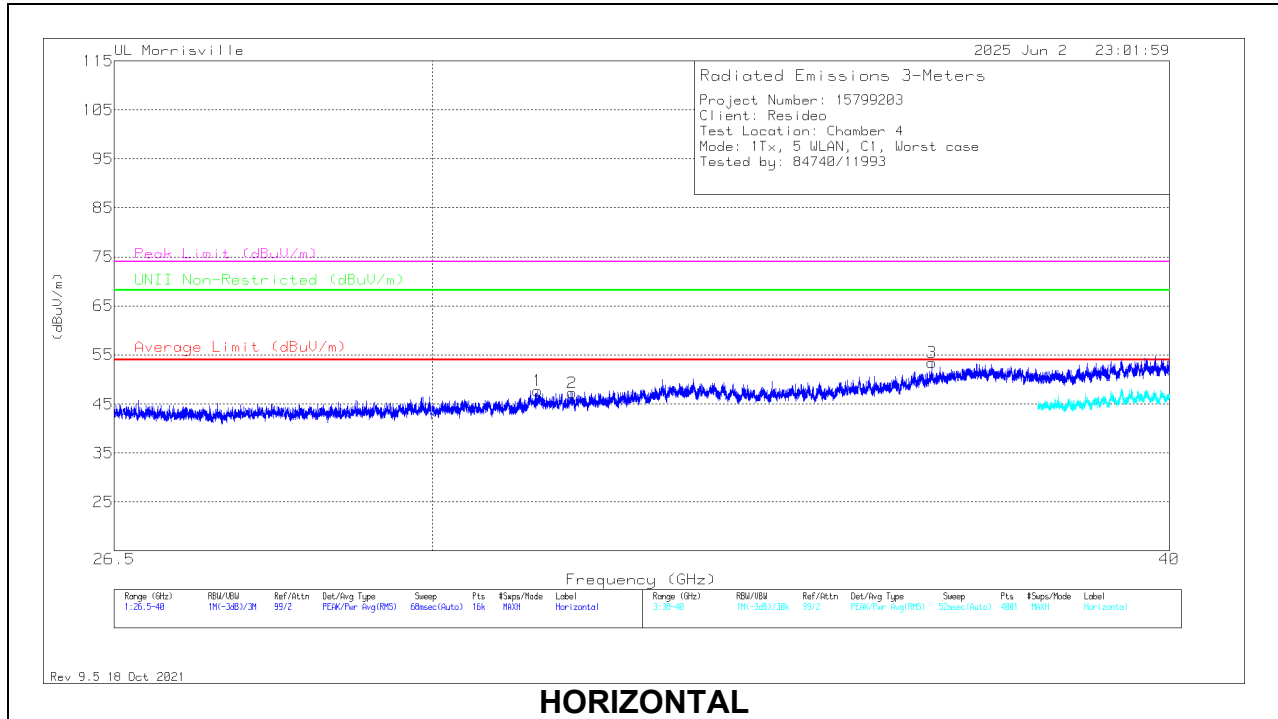

26 – 40GHz Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	204705 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 31.26351	43.87	Pk	37	-33.2	0	47.67	54	-6.33	74	-26.33	-	-	0-360	350	H
2	* ** 31.68367	43.65	Pk	37	-33.4	0	47.25	54	-6.75	74	-26.75	-	-	0-360	300	H
3	* ** 36.46137	49.59	PK-U	37.9	-34.2	0	53.29	-	-	74	-20.71	-	-	64	118	H
	* ** 36.4614	35.67	ADV	37.9	-34.2	.2	39.57	54	-14.43	-	-	-	-	64	118	H
4	* ** 31.28461	44.17	Pk	37	-33.4	0	47.77	54	-6.23	74	-26.23	-	-	0-360	150	V
5	* ** 31.69296	42.94	Pk	37	-33.1	0	46.84	54	-7.16	74	-27.16	-	-	0-360	200	V
6	* ** 36.4588	49.2	PK-U	37.9	-34.2	0	52.9	-	-	74	-21.1	-	-	41	145	V
	* ** 36.4607	35.71	ADV	37.9	-34.2	.2	39.61	54	-14.39	-	-	-	-	41	145	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band



Pk - Peak detector

PK-U - Maximum Peak

ADV - Linear Voltage Average

11. SIM TRANSMISSION TESTING

11.1. CONFIG #1: SUB-1GHz / 2.4GHz WLAN / 60GHz RADAR

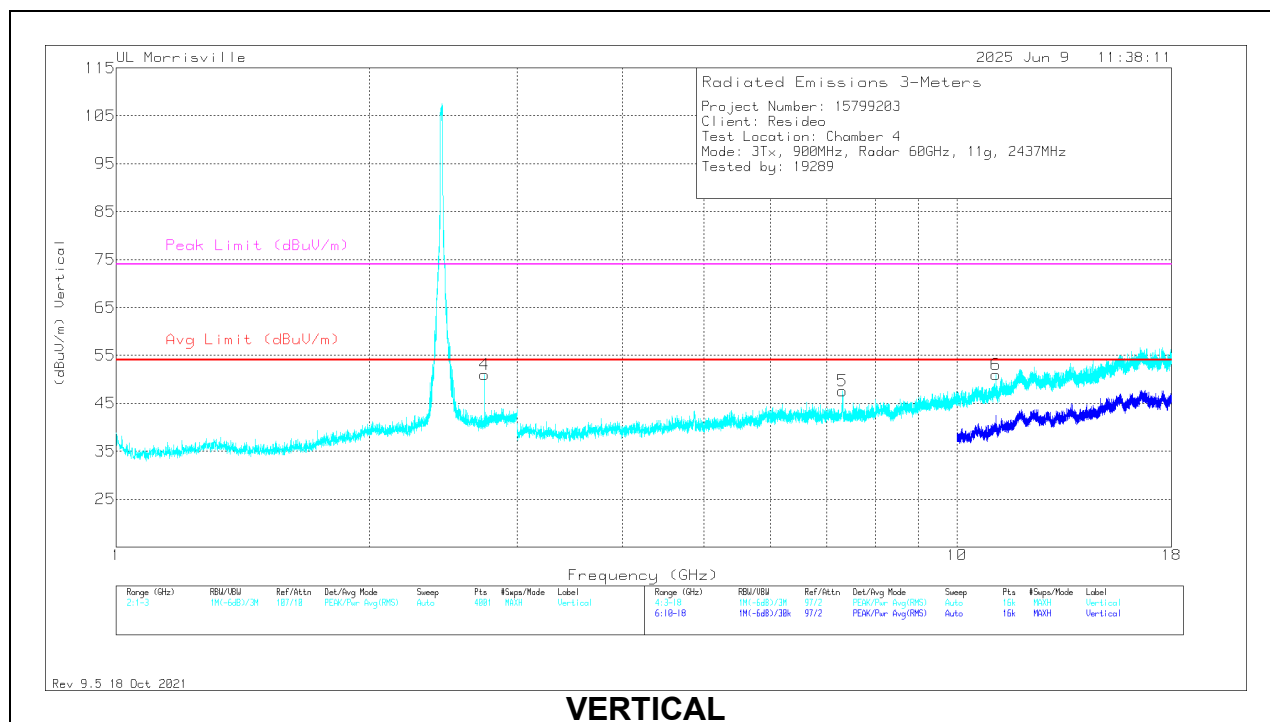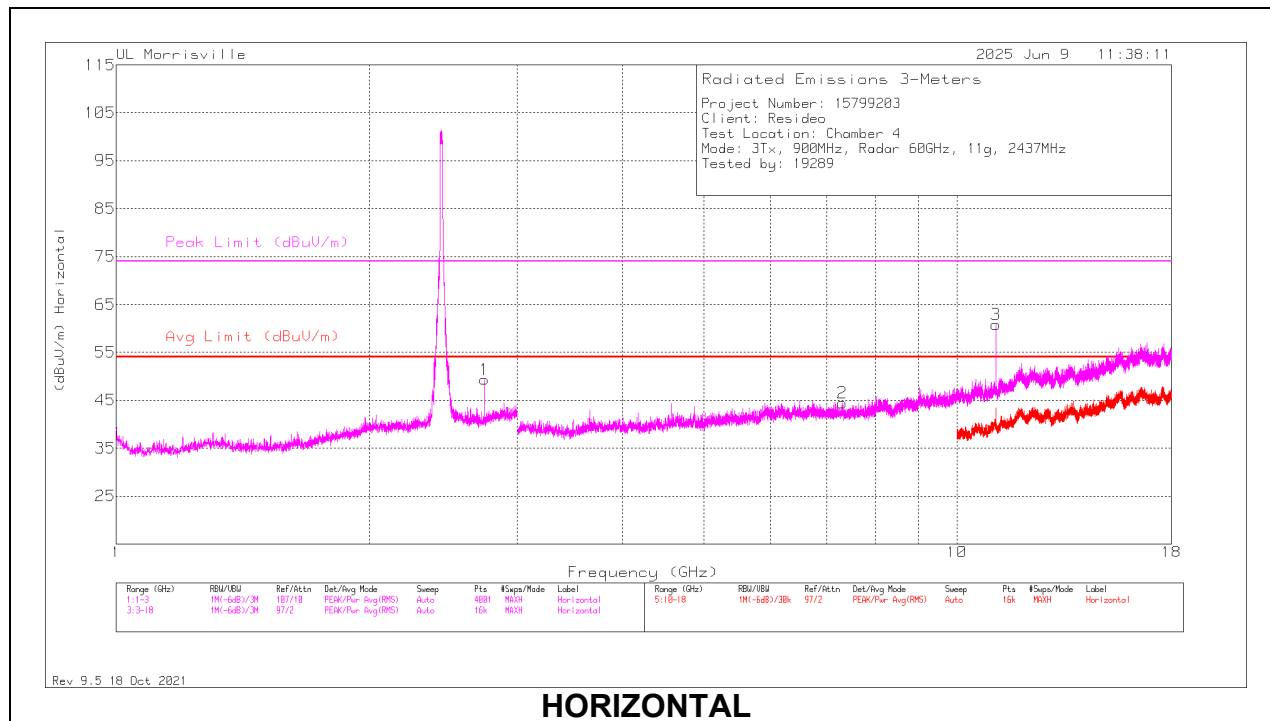

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Filter (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.7438	41.43	PK2	31.9	-22.3	.4	51.43	-	-	74	-22.57	206	139	H
	* ** 2.7438	37.91	ADV	31.9	-22.3	.4	47.91	54	-6.09	-	-	206	139	H
	* ** 2.7437	37.74	RMS	31.9	-22.3	.4	47.74	54	-6.26	-	-	206	139	H
4	* ** 2.7437	43.52	PK2	31.9	-22.3	.4	53.52	-	-	74	-20.48	223	188	V
	* ** 2.7438	40.65	ADV	31.9	-22.3	.4	50.65	54	-3.35	-	-	223	188	V
	* ** 2.7438	40.46	RMS	31.9	-22.3	.4	50.46	54	-3.54	-	-	223	188	V
6	* ** 11.126	44.32	PK2	37.8	-22.9	0	59.22	-	-	74	-14.78	95	188	V
	* ** 11.122	22.9	ADV	37.8	-22.9	0	37.8	54	-16.2	-	-	95	188	V
3	* ** 11.121	50.49	PK2	37.8	-22.9	0	65.39	-	-	74	-8.61	68	152	H
	* ** 11.121	22.58	ADV	37.8	-22.9	0	37.48	54	-16.52	-	-	68	152	H
2	* ** 7.305	36.32	Pk	35.5	-27.4	0	44.42	54	-9.58	74	-29.58	0-360	100	H
5	* ** 7.314	39.69	Pk	35.5	-27.6	0	47.59	54	-6.41	74	-26.41	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band



Pk - Peak detector

RMS - RMS detection

PK2 - Maximum Peak

ADV - Linear Voltage Average



11.2. CONFIG #2: SUB-1GHz / 5GHz WLAN / 60GHz RADAR

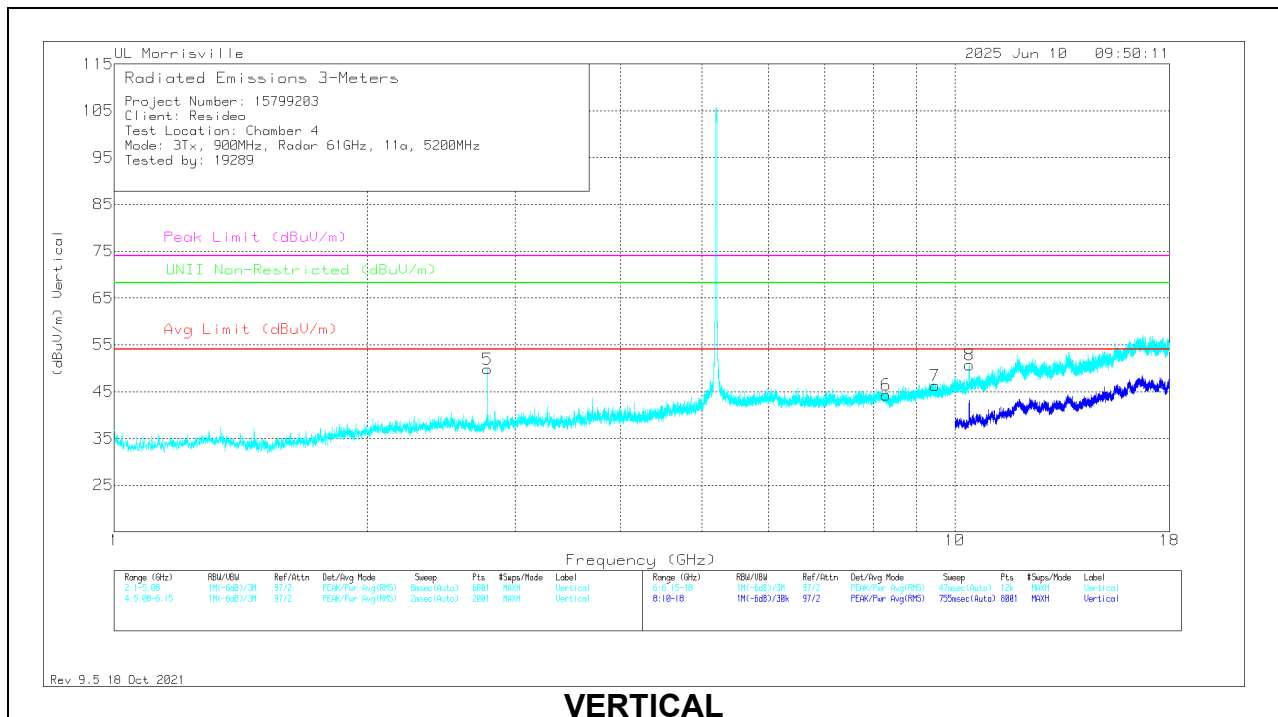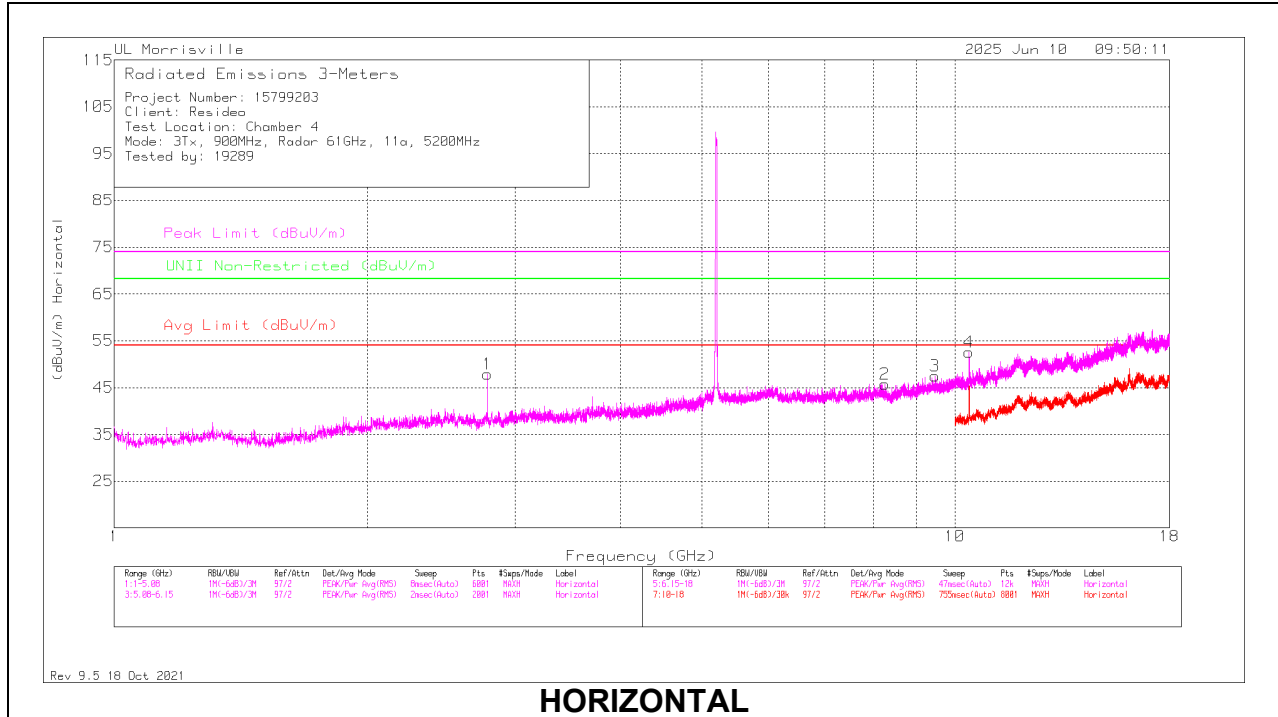

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Filt er (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.778	50.35	Pk	32.3	-35.2	.4	47.85	54	-6.15	74	-26.15	-	-	0-360	100	H
5	* ** 2.743	53.9	PK2	31.9	-35.4	.4	50.8	-	-	74	-23.2	-	-	215	337	V
	* ** 2.744	51.08	ADV	31.9	-35.4	.4	47.98	54	-6.02	-	-	-	-	215	337	V
	* ** 2.744	51.07	RMS	31.9	-35.4	.4	47.97	54	-6.03	-	-	-	-	215	337	V
2	* ** 8.255	36.51	Pk	35.7	-26.5	0	45.71	54	-8.29	74	-28.29	-	-	0-360	100	H
6	* ** 8.288	35.1	Pk	35.7	-26.5	0	44.3	54	-9.7	74	-29.7	-	-	0-360	200	V
7	* ** 9.473	34.92	Pk	36.5	-25.1	0	46.32	54	-7.68	74	-27.68	-	-	0-360	200	V
3	* ** 9.479	36.1	Pk	36.6	-25.2	0	47.5	54	-6.5	74	-26.5	-	-	0-360	100	H
4	10.393	40.12	Pk	37.4	-24.9	0	52.62	-	-	-	-	-	-	0-360	100	H
8	10.401	38.48	Pk	37.4	-25.2	0	50.68	-	-	-	-	-	-	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection
 PK2 - Maximum Peak
 ADV - Linear Voltage Average

11.3. CONFIG #3: SUB-1GHz / BLE / 60GHz RADAR

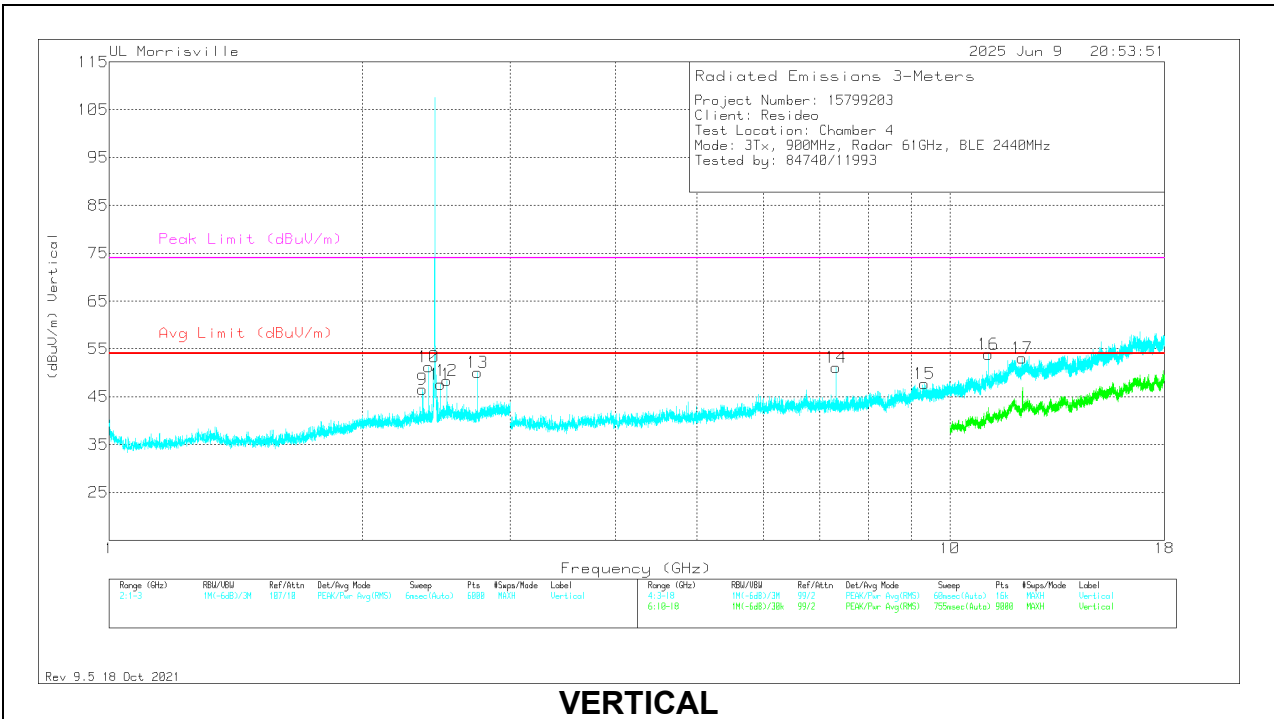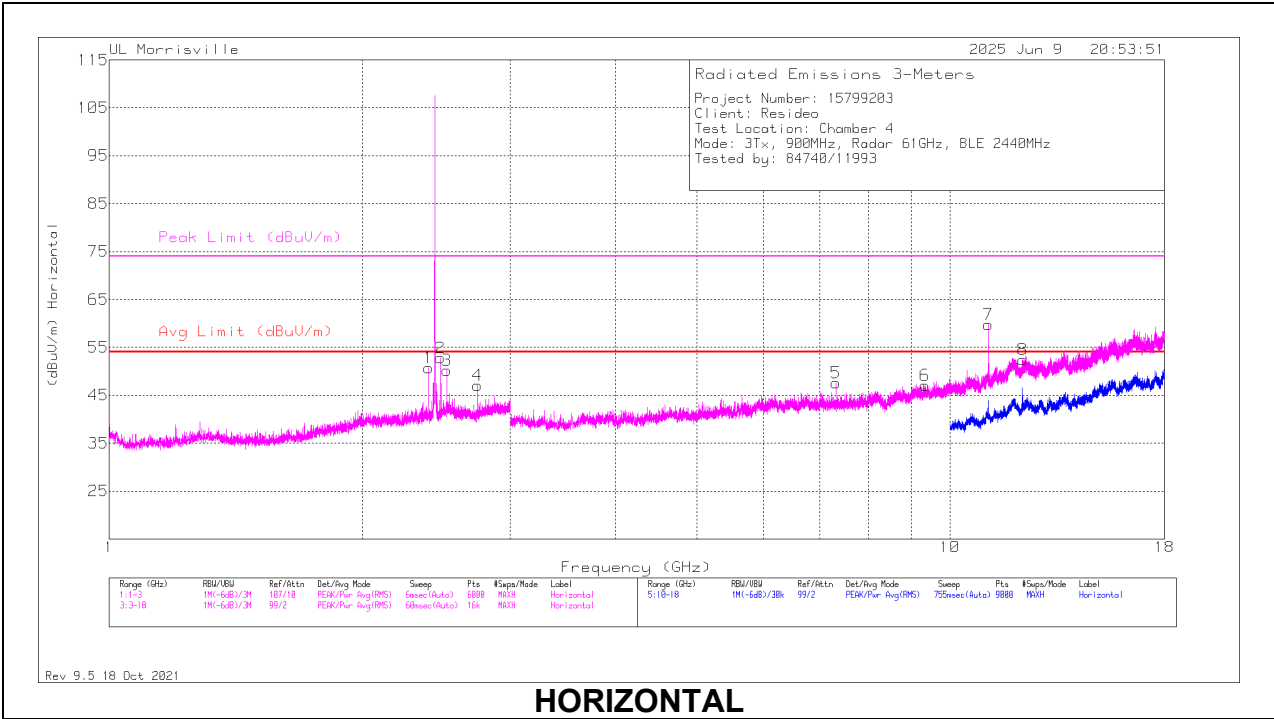

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Filt er (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	** 2.520	42.16	PK2	32.4	-22.8	.5	0	52.26	-	-	-	-	241	123	H
	** 2.520	21.98	ADV	32.4	-22.8	.5	4.2	36.28	54	-17.72	-	-	241	123	H
4	*** 2.744	37.02	PK	31.9	-22.3	.4	0	47.02	54	-6.98	-	-	0-360	100	H
9	*** 2.360	37.21	PK	31.9	-23	.4	0	46.51	54	-7.49	-	-	0-360	200	V
12	** 2.520	43.54	PK2	32.4	-22.8	.5	0	53.64	-	-	-	-	119	112	V
	** 2.520	22.21	ADV	32.4	-22.8	.5	4.2	36.51	54	-17.49	-	-	119	112	V
13	*** 2.742	34.47	PK2	31.9	-22.3	.4	0	44.47	-	-	74	-29.53	296	333	V
	*** 2.7450	20.96	ADV	31.9	-22.4	.4	4.2	35.06	54	-18.94	-	-	296	333	V
5	*** 7.319	39.42	PK	35.5	-27.7	.4	0	47.62	54	-6.38	-	-	0-360	100	H
6	*** 9.339	34.49	PK	36.4	-24.2	.4	0	47.09	54	-6.91	-	-	0-360	100	H
7	*** 11.108	35.39	PK2	37.8	-22.9	.3	0	50.59	-	-	74	-23.41	319	214	H
	*** 11.109	22.85	ADV	37.8	-23	.3	4.2	42.15	54	-11.85	-	-	319	214	H
8	*** 12.201	35.67	PK2	38.7	-21.2	.6	0	53.77	-	-	74	-20.23	210	109	H
	*** 12.201	23.34	ADV	38.7	-21.2	.6	4.2	45.64	54	-8.36	-	-	210	109	H
14	*** 7.319	46.11	PK2	35.5	-27.7	.4	0	54.31	-	-	74	-19.69	233	148	V
	*** 7.319	36.44	ADV	35.5	-27.7	.4	4.2	48.84	54	-5.16	-	-	233	148	V
15	*** 9.3320	34.98	PK	36.4	-24.1	.4	0	47.68	54	-6.32	-	-	0-360	200	V
16	*** 11.118	47.73	PK2	37.8	-22.9	.4	0	63.03	-	-	74	-10.97	99	190	V
	*** 11.117	23.09	ADV	37.8	-22.9	.4	4.2	42.59	54	-11.41	-	-	99	190	V
17	*** 12.199	39.14	PK2	38.7	-21.1	.6	0	57.34	-	-	74	-16.66	187	167	V
	*** 12.199	27.27	ADV	38.7	-21.1	.6	4.2	49.67	54	-4.33	-	-	187	167	V
10	2.3999	41.63	PK	32	-22.9	.5	0	51.23	-	-	-	-	0-360	200	V
1	2.40023	41.1	PK	32	-22.9	.5	0	50.7	-	-	-	-	0-360	100	H
11	2.47991	37.72	PK	32.3	-22.8	.4	0	47.62	-	-	-	-	0-360	200	V
2	2.48025	42.87	PK	32.3	-22.8	.4	0	52.77	-	-	-	-	0-360	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band



PK - Peak detector

PK2 - Maximum Peak

ADV - Linear Voltage Average

Note: 4.2dB DCCF comes is from the 2.4GHz/BLE report.

11.4. CONFIG #4: SUB-1GHz / 5GHz WLAN / BLE / 60GHz RADAR

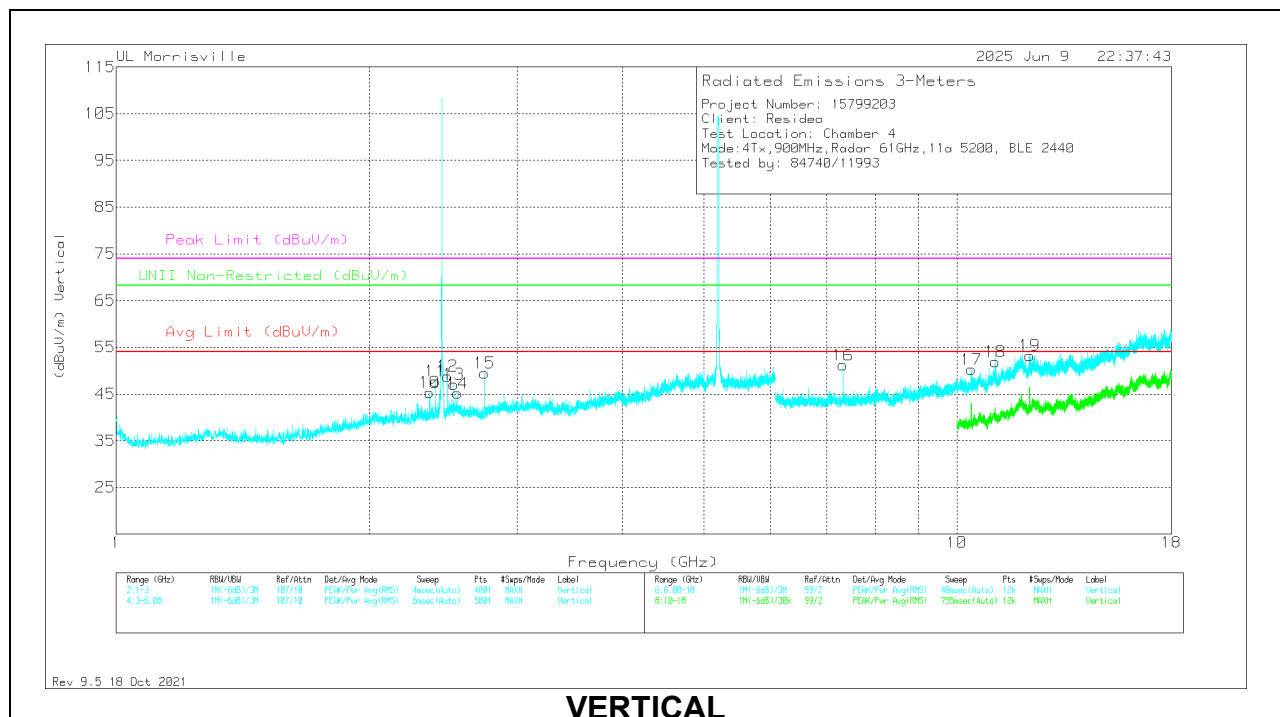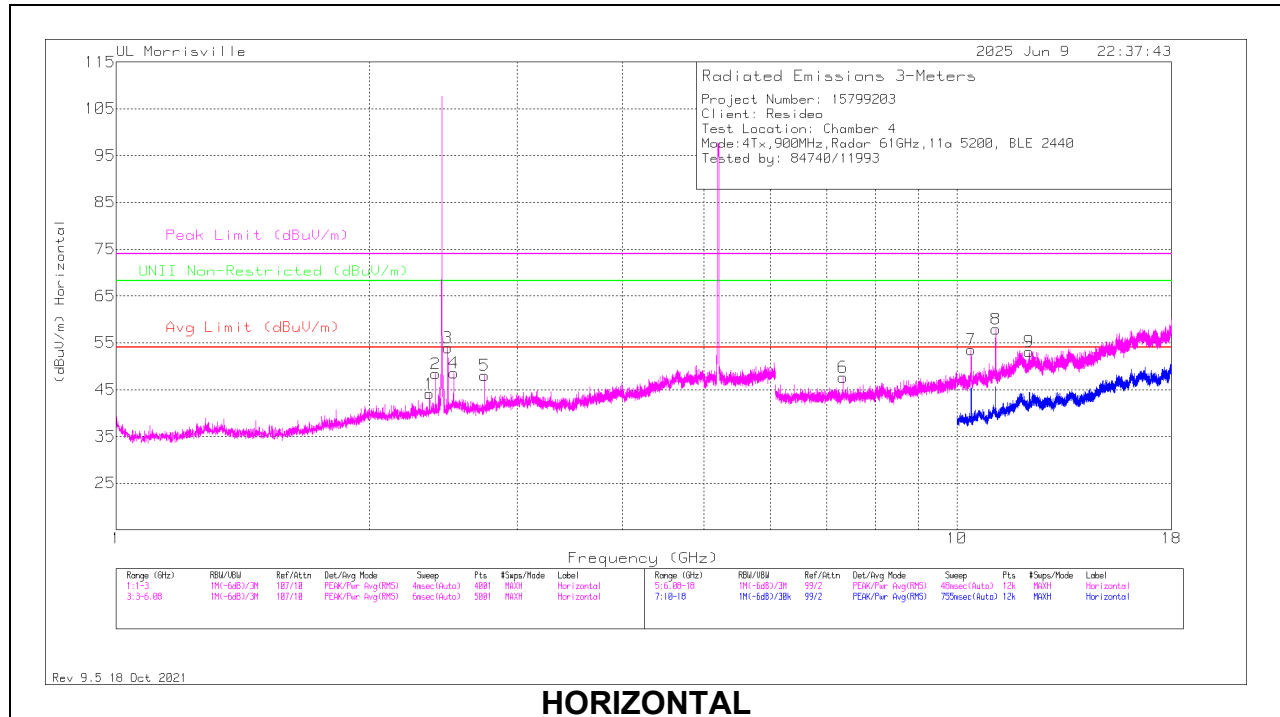

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Filter (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII PK (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.36	34.77	Pk	31.9	-23	.4	0	44.07	54	-9.93	74	-29.93	-	-	0-360	100	H
4	** 2.52	43.03	PK2	32.4	-22.8	.5	0	53.13	-	-	74	-20.87	-	-	181	220	H
	** 2.520	22.42	ADV	32.4	-22.8	.5	4.2	36.72	54	-17.28	-	-	-	-	181	220	H
5	*** 2.744	38.07	Pk	31.9	-22.4	.4	0	47.97	54	-6.03	74	-26.03	-	-	0-360	100	H
10	*** 2.36	36.08	Pk	31.9	-23	.4	0	45.38	54	-8.62	74	-28.62	-	-	0-360	200	V
13	** 2.520	37	Pk	32.4	-22.8	.5	0	47.1	54	-6.9	74	-26.9	-	-	0-360	200	V
14	** 2.549	34.94	Pk	32.4	-22.7	.5	0	45.14	54	-8.86	74	-28.86	-	-	0-360	200	V
15	*** 2.744	41.52	PK2	31.9	-22.3	.4	0	51.52	-	-	74	-22.48	-	-	219	301	V
	*** 2.744	38.14	ADV	31.9	-22.3	.4	0	48.14	54	-5.86	-	-	-	-	219	301	V
6	*** 7.319	39.04	Pk	35.5	-27.3	.4	0	47.64	54	-6.36	74	-26.36	-	-	0-360	100	H
8	*** 11.121	46.75	PK2	37.8	-23.1	.4	0	61.85	-	-	74	-12.15	-	-	71	148	H
	*** 11.121	22.3	ADV	37.8	-23.1	.4	4.2	41.6	54	-12.4	-	-	-	-	71	148	H
9	*** 12.199	35.94	PK2	38.7	-21.4	.6	0	53.84	-	-	74	-20.16	-	-	212	235	H
	*** 12.199	23.01	ADV	38.7	-21.4	.6	4.2	45.11	54	-8.89	-	-	-	-	212	235	H
16	*** 7.319	45.67	PK2	35.5	-27.3	.4	0	54.27	-	-	74	-19.73	-	-	233	108	V
	*** 7.319	34.68	ADV	35.5	-27.3	.4	4.2	47.48	54	-6.52	-	-	-	-	233	108	V
18	*** 11.110	45.8	PK2	37.8	-23	.3	0	60.9	-	-	74	-13.1	-	-	223	188	V
	*** 11.113	23.03	ADV	37.8	-23.1	.3	4.2	42.23	54	-11.77	-	-	-	-	223	188	V
19	*** 12.201	38.8	PK2	38.7	-21.5	.6	0	56.6	-	-	74	-17.4	-	-	206	284	V
	*** 12.201	26.85	ADV	38.7	-21.5	.6	4.2	48.85	54	-5.15	-	-	-	-	206	284	V
2	2.4	38.76	Pk	32	-22.9	.5	0	48.36	-	-	-	-	68.2	-19.84	0-360	100	H
11	2.4	38.14	Pk	32	-22.9	.5	0	47.74	-	-	-	-	68.2	-20.46	0-360	200	V
12	2.48	38.97	Pk	32.3	-22.8	.4	0	48.87	-	-	-	-	68.2	-19.33	0-360	200	V
3	2.4805	44	Pk	32.3	-22.8	.4	0	53.9	-	-	-	-	68.2	-14.3	0-360	100	H
7	10.40001	40.91	Pk	37.4	-25.1	.3	0	53.51	-	-	-	-	68.2	-14.69	0-360	100	H
17	10.40497	37.84	Pk	37.4	-25.3	.3	0	50.24	-	-	-	-	68.2	-17.96	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

PK2 - Maximum Peak

ADV - Linear Voltage Average

Note: 4.2dB DCCF comes is from the 2.4GHz/BLE report.

12. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)
RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both lines.

RESULTS

12.1. AC POWER LINE ANTENNA 1

LINE 1 RESULTS

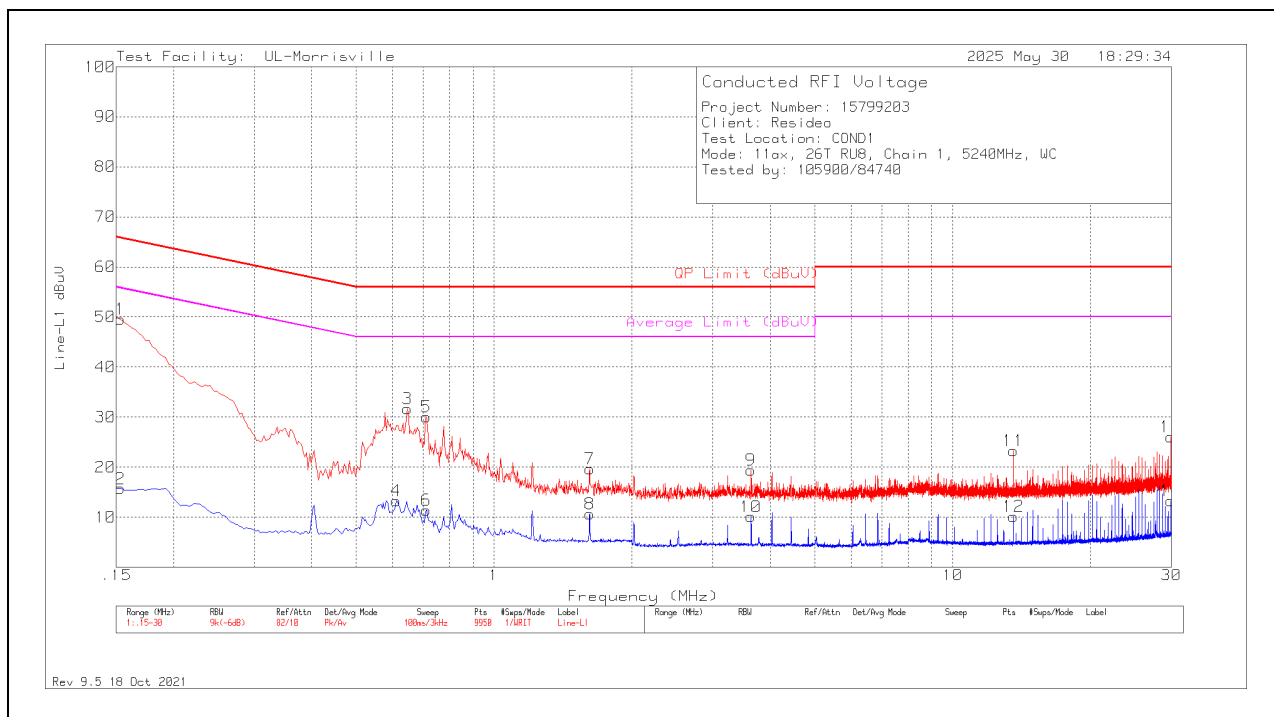


Range 1: Line-L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VDF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.153	39.63	Pk	.2	9.7	49.53	65.84	-16.31	-	-
2	.153	5.8	Av	.2	9.7	15.7	-	-	55.84	-40.14
3	.648	21.96	Pk	0	9.7	31.66	56	-24.34	-	-
4	.612	3.58	Av	0	9.7	13.28	-	-	46	-32.72
5	.711	20.37	Pk	0	9.7	30.07	56	-25.93	-	-
6	.7125	1.71	Av	0	9.7	11.41	-	-	46	-34.59
7	1.617	9.98	Pk	0	9.7	19.68	56	-36.32	-	-
8	1.617	.93	Av	0	9.7	10.63	-	-	46	-35.37
9	3.636	9.73	Pk	0	9.7	19.43	56	-36.57	-	-
10	3.636	.37	Av	0	9.7	10.07	-	-	46	-35.93
11	13.56	13.5	Pk	.1	9.7	23.3	60	-36.7	-	-
12	13.563	.38	Av	.1	9.7	10.18	-	-	50	-39.82
13	29.886	15.78	Pk	.5	9.8	26.08	60	-33.92	-	-
14	29.883	2.92	Av	.5	9.8	13.22	-	-	50	-36.78

Pk - Peak detector

Av - Average detection

LINE 2 RESULTS

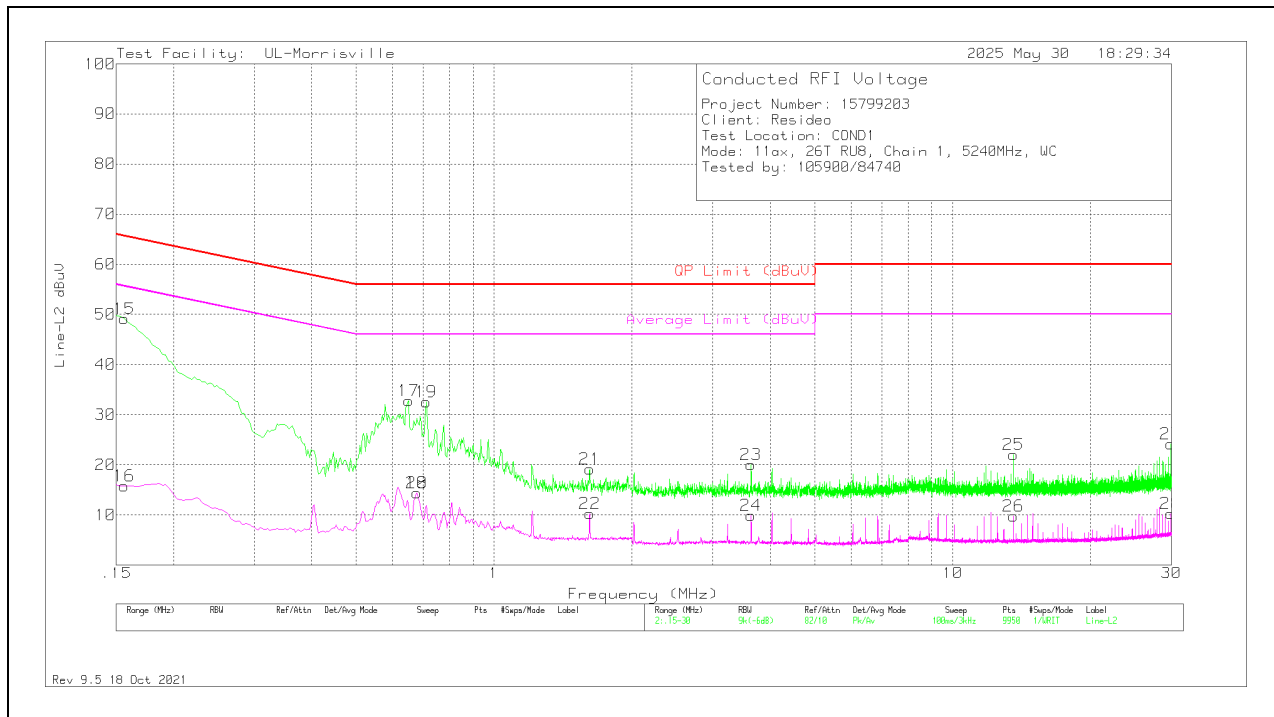


Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VDF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
15	.156	39.23	Pk	.2	9.7	49.13	65.67	-16.54	-	-
16	.156	5.89	Av	.2	9.7	15.79	-	-	55.67	-39.88
17	.651	23.04	Pk	0	9.7	32.74	56	-23.26	-	-
18	.678	4.68	Av	0	9.7	14.38	-	-	46	-31.62
19	.711	22.86	Pk	0	9.7	32.56	56	-23.44	-	-
20	.678	4.68	Av	0	9.7	14.38	-	-	46	-31.62
21	1.617	9.41	Pk	0	9.7	19.11	56	-36.89	-	-
22	1.617	.55	Av	0	9.7	10.25	-	-	46	-35.75
23	3.633	10.34	Pk	0	9.7	20.04	56	-35.96	-	-
24	3.636	.15	Av	0	9.7	9.85	-	-	46	-36.15
25	13.563	12.24	Pk	.1	9.7	22.04	60	-37.96	-	-
26	13.56	-.05	Av	.1	9.7	9.75	-	-	50	-40.25
27	29.892	13.83	Pk	.5	9.8	24.13	60	-35.87	-	-
28	29.892	-.06	Av	.5	9.8	10.24	-	-	50	-39.76

Pk - Peak detector

Av - Average detection

12.2. AC POWER LINE ANTENNA 2

LINE 1 RESULTS

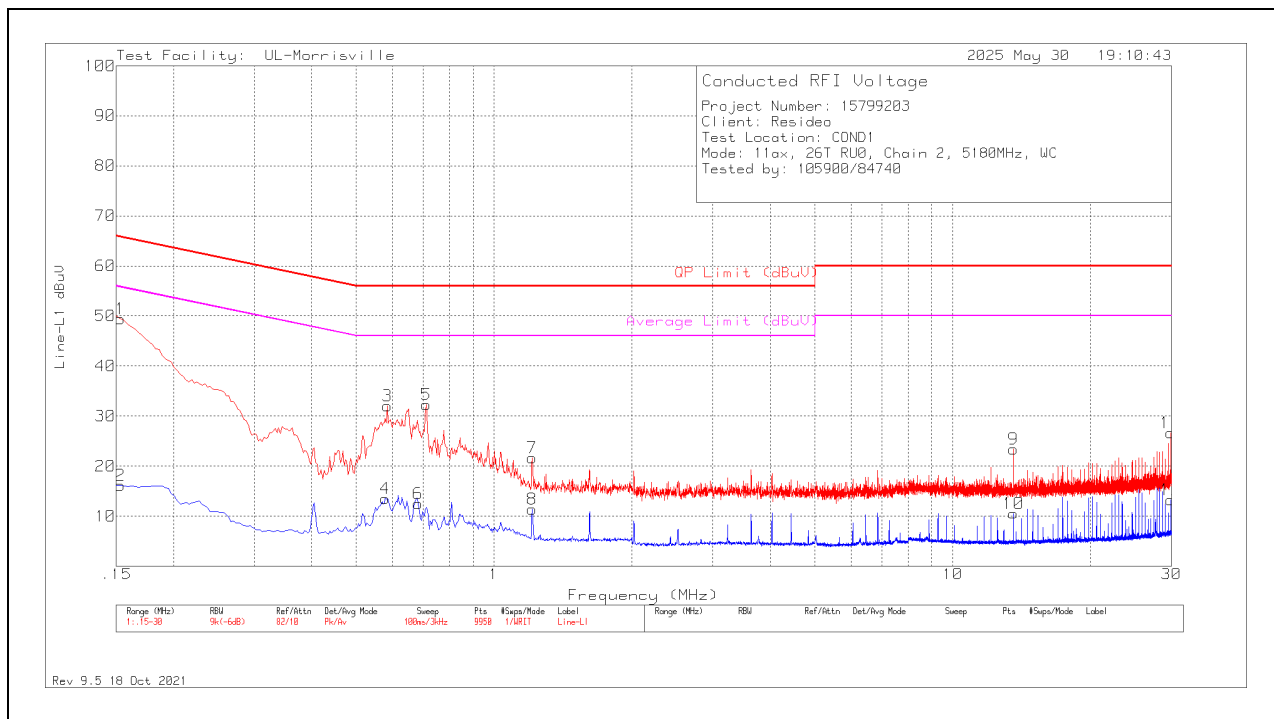


Range 1: Line-L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VDF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.153	39.51	Pk	.2	9.7	49.41	65.84	-16.43	-	-
2	.153	6.22	Av	.2	9.7	16.12	-	-	55.84	-39.72
3	.585	22.33	Pk	0	9.7	32.03	56	-23.97	-	-
4	.579	3.86	Av	0	9.7	13.56	-	-	46	-32.44
5	.711	22.56	Pk	0	9.7	32.26	56	-23.74	-	-
6	.684	2.81	Av	0	9.7	12.51	-	-	46	-33.49
7	1.212	11.97	Pk	0	9.7	21.67	56	-34.33	-	-
8	1.212	1.72	Av	0	9.7	11.42	-	-	46	-34.58
9	13.56	13.58	Pk	.1	9.7	23.38	60	-36.62	-	-
10	13.563	.76	Av	.1	9.7	10.56	-	-	50	-39.44
11	29.895	16.37	Pk	.5	9.8	26.67	60	-33.33	-	-
12	29.892	2.95	Av	.5	9.8	13.25	-	-	50	-36.75

Pk - Peak detector

Av - Average detection

LINE 2 RESULTS

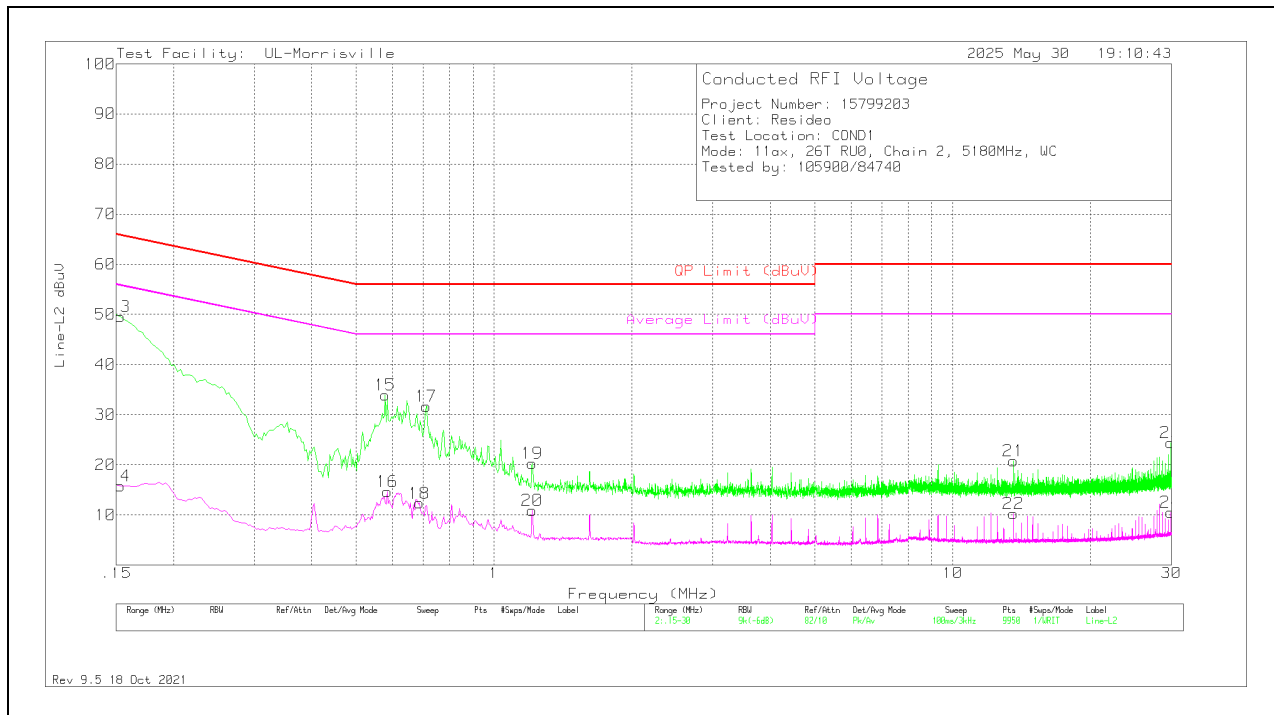

Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VDF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
13	.153	39.65	Pk	.2	9.7	49.55	65.84	-16.29	-	-
14	.153	5.89	Av	.2	9.7	15.79	-	-	55.84	-40.05
15	.579	24.21	Pk	0	9.7	33.91	56	-22.09	-	-
16	.585	4.93	Av	0	9.7	14.63	-	-	46	-31.37
17	.711	22.01	Pk	0	9.7	31.71	56	-24.29	-	-
18	.687	2.62	Av	0	9.7	12.32	-	-	46	-33.68
19	1.212	10.6	Pk	0	9.7	20.3	56	-35.7	-	-
20	1.212	1.22	Av	0	9.7	10.92	-	-	46	-35.08
21	13.56	11.01	Pk	.1	9.7	20.81	60	-39.19	-	-
22	13.563	.5	Av	.1	9.7	10.3	-	-	50	-39.7
23	29.898	14.13	Pk	.5	9.8	24.43	60	-35.57	-	-
24	29.895	.19	Av	.5	9.8	10.49	-	-	50	-39.51

Pk - Peak detector

Av - Average detection

13. SETUP PHOTOS

Please refer to R15799203-EP1 for setup photos

END OF TEST REPORT