


VERTICAL RESULT

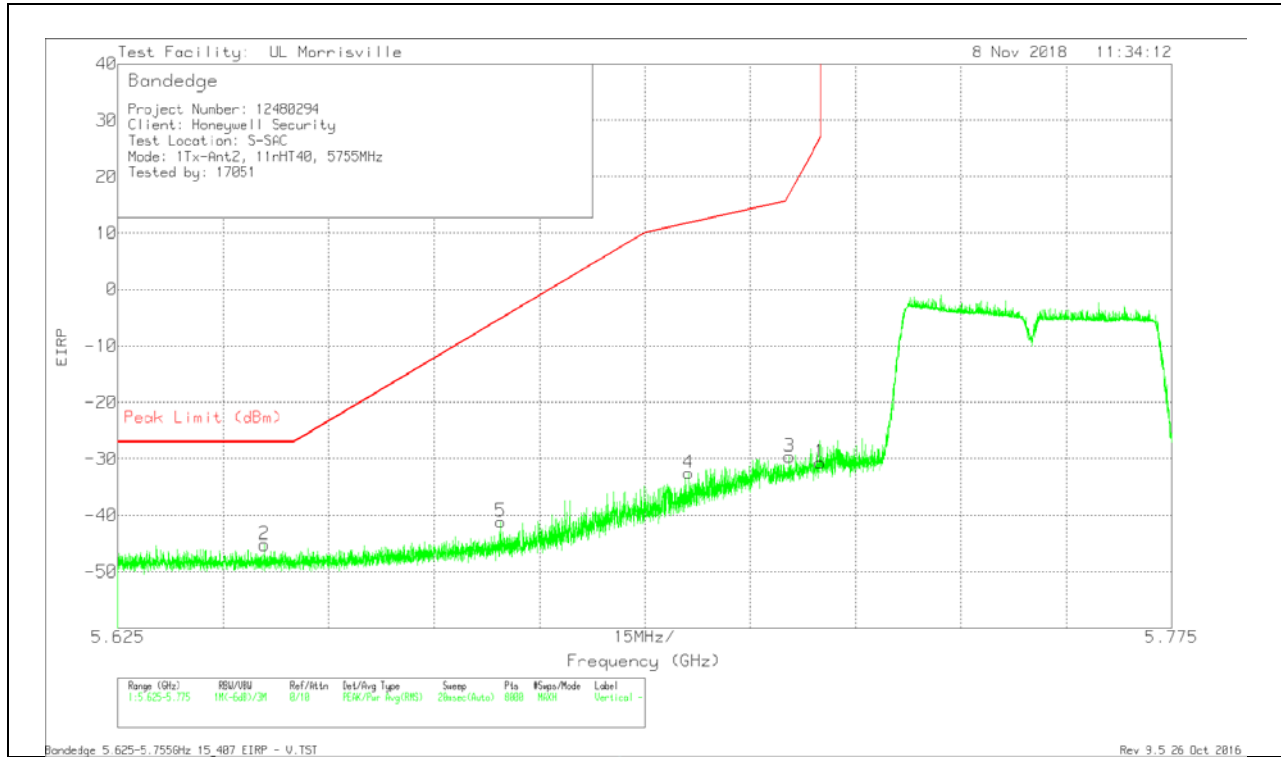


Note: Above limit is dBm/MHz.

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0069 AF (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm/MHz)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.646	-68.1	Pk	34.5	-23.4	11.8	-45.2	-27	-18.2	108	378	V
5	5.679	-64.11	Pk	34.6	-23.4	11.8	-41.11	-5.18	-35.93	108	378	V
4	5.706	-55.51	Pk	34.7	-23.5	11.8	-32.51	11.75	-44.26	108	378	V
3	5.721	-52.7	Pk	34.7	-23.4	11.8	-29.6	16.96	-46.56	108	378	V
1	5.725	-53.64	Pk	34.6	-23.4	11.8	-30.64	26.97	-57.61	108	378	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

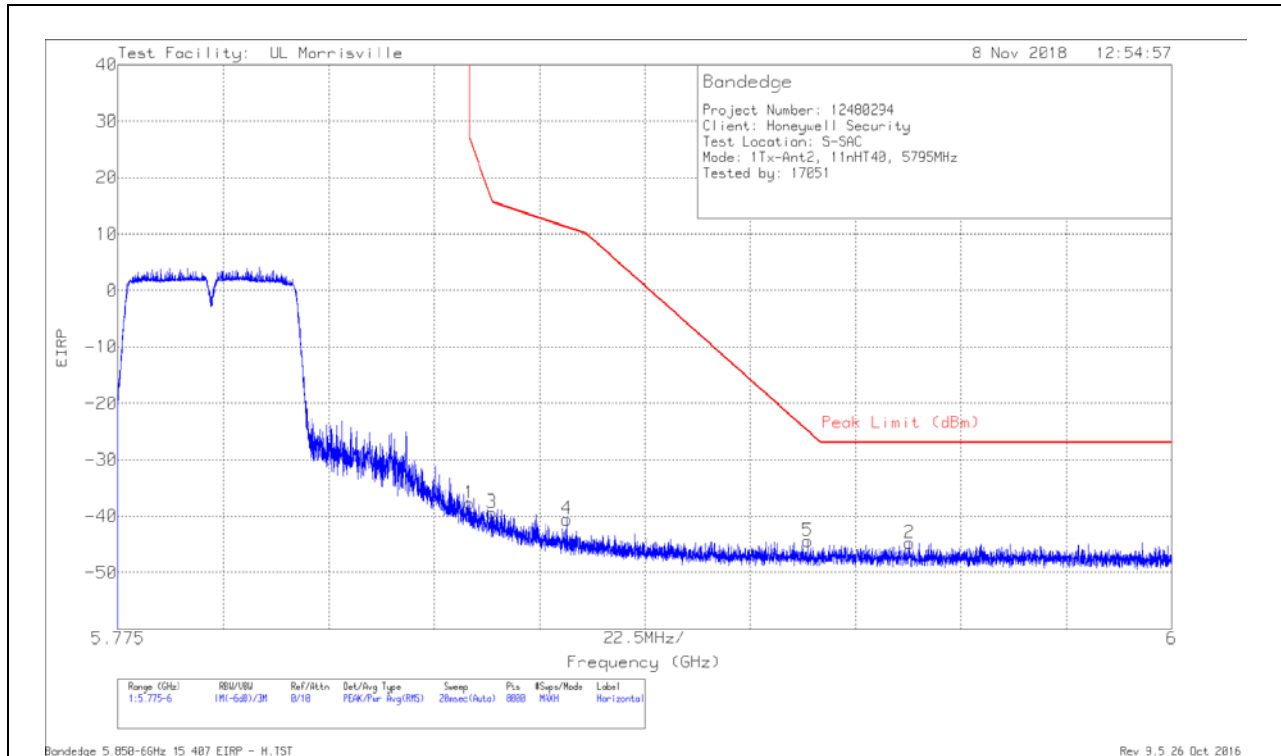


Note: Above limit is dBm/MHz.

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0069 AF (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm/MHz)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-61.12	Pk	34.7	-23.1	11.8	-37.72	26.95	-64.67	150	206	H
3	5.855	-62.77	Pk	34.7	-23.1	11.8	-39.37	16.12	-55.49	150	206	H
4	5.871	-64.03	Pk	34.8	-23.1	11.8	-40.53	11.19	-51.72	150	206	H
5	5.922	-68.09	Pk	34.9	-23	11.8	-44.39	-24.93	-19.46	150	206	H
2	5.944	-68.65	Pk	35	-22.9	11.8	-44.75	-27	-17.75	150	206	H

Pk - Peak detector

VERTICAL RESULT

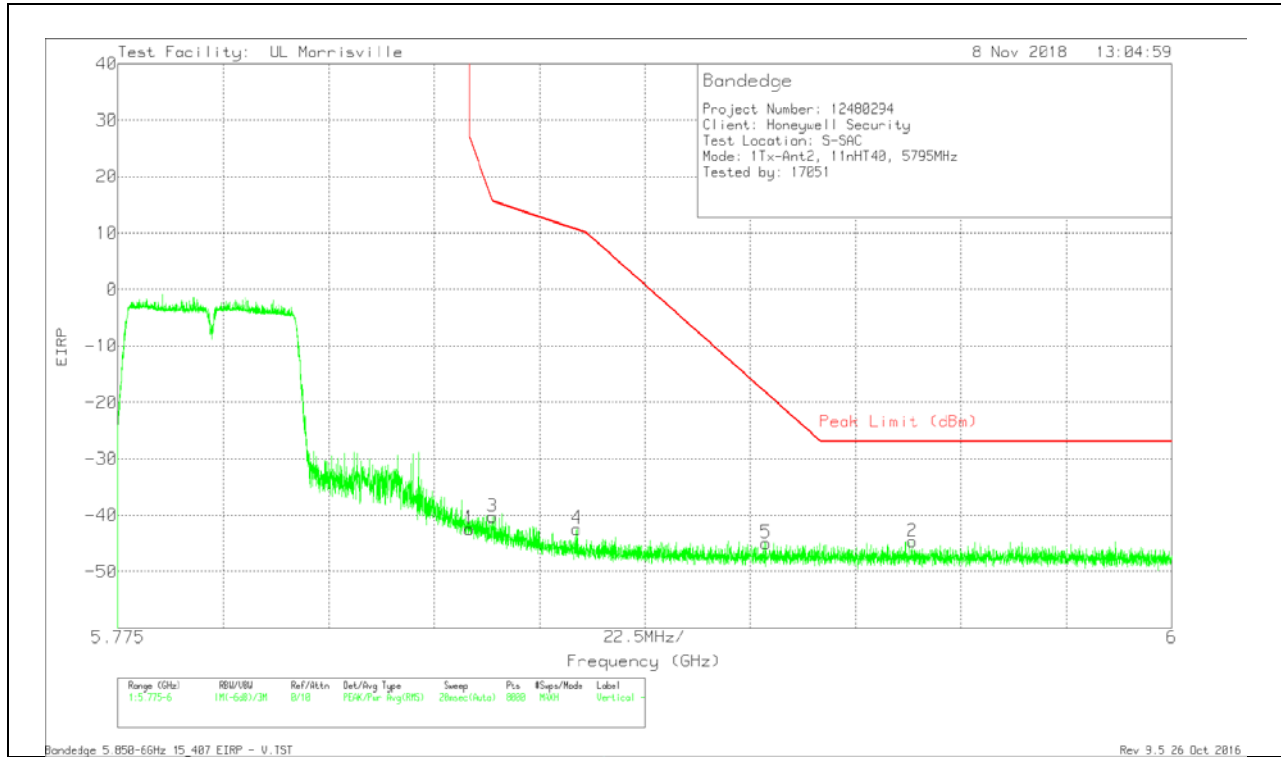



Note: Above limit is dBm/MHz.

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0069 AF (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm/MHz)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-65.78	Pk	34.7	-23.1	11.8	-42.38	26.95	-69.33	100	334	V
3	5.855	-63.77	Pk	34.8	-23.1	11.8	-40.27	15.67	-55.94	100	334	V
4	5.873	-65.89	Pk	34.8	-23.1	11.8	-42.39	10.58	-52.97	100	334	V
5	5.913	-68.73	Pk	34.9	-22.9	11.8	-44.93	-18.35	-26.58	100	334	V
2	5.945	-68.5	Pk	35	-22.9	11.8	-44.6	-27	-17.6	100	334	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

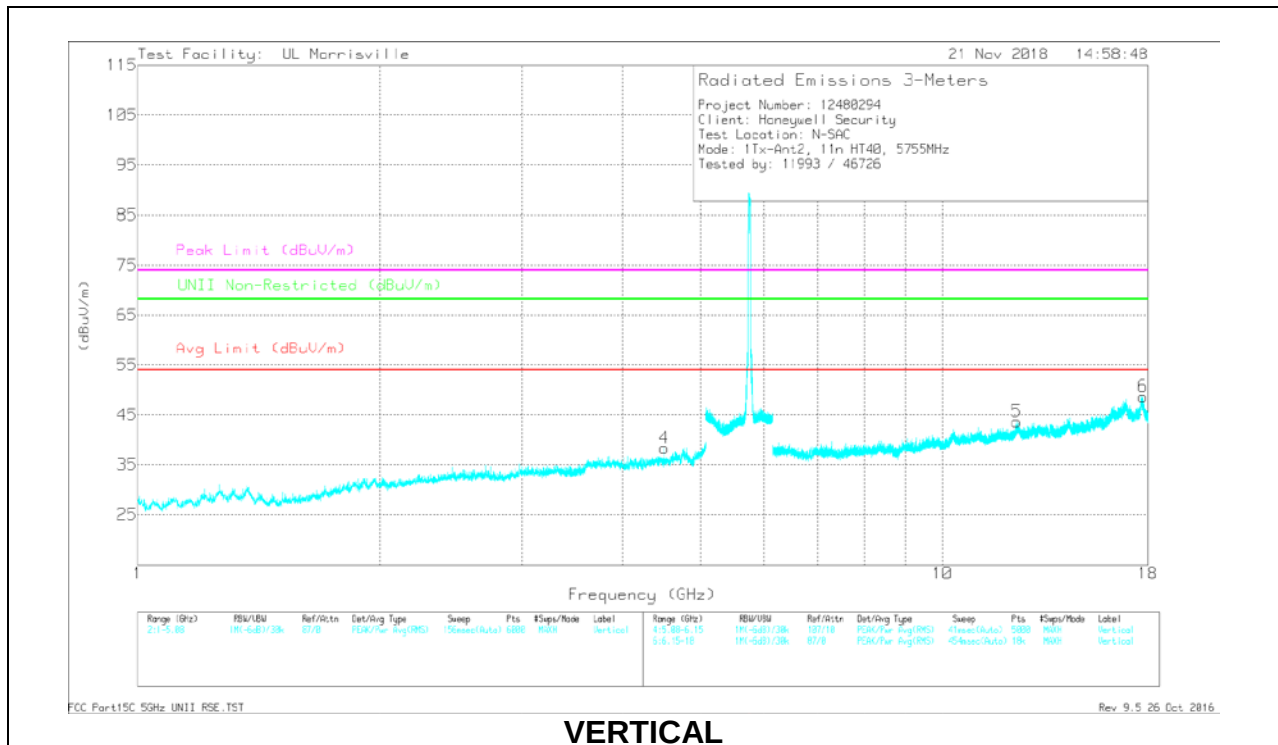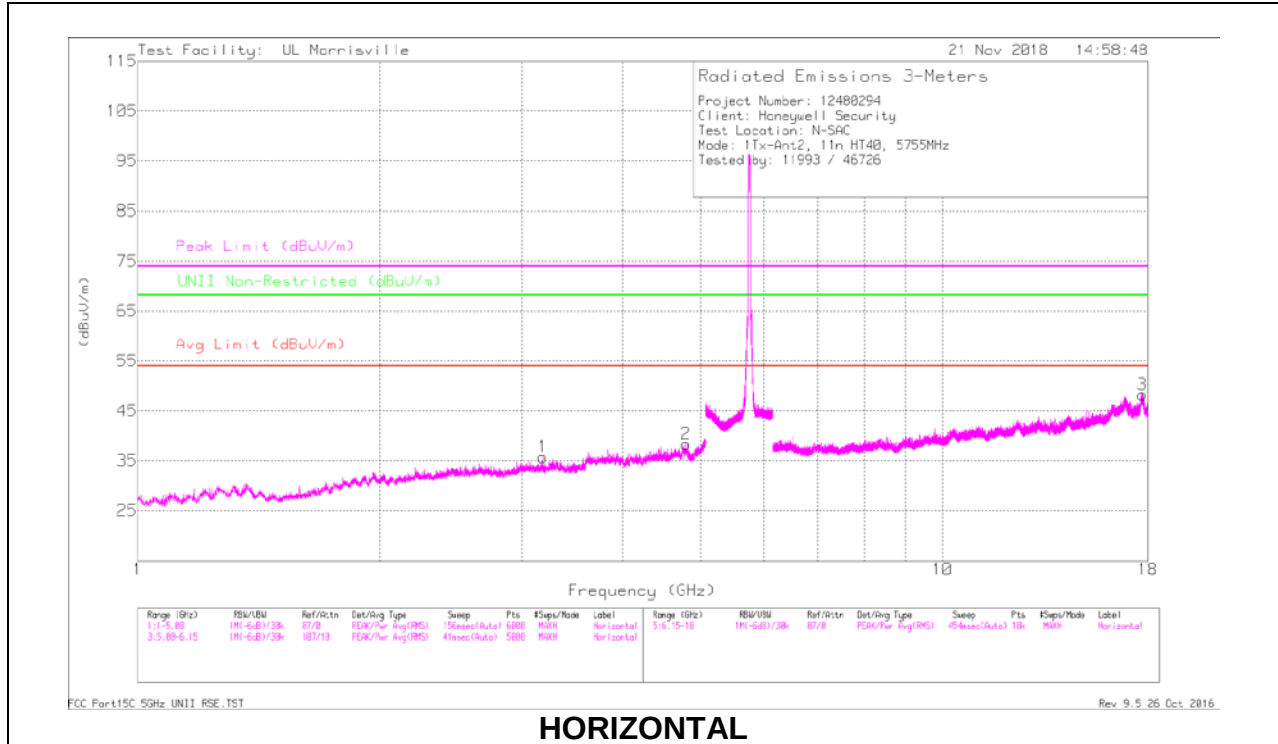

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 AF (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 4.796	41.4	PK-U	34.1	-31.3	0	44.2	-	-	74	-29.8	-	-	226	261	H
	*** 4.796	29.92	ADR	34.1	-31.3	.11	32.83	54	-21.17	-	-	-	-	226	261	H
4	*** 4.514	44.19	PK-U	33.9	-32.7	0	45.39	-	-	74	-28.61	-	-	151	314	V
	*** 4.514	35.67	ADR	33.9	-32.7	.11	36.98	54	-17.02	-	-	-	-	151	314	V
3	*** 17.728	33.81	PK-U	41.5	-21.1	0	54.21	-	-	74	-19.79	-	-	356	252	H
	*** 17.729	22.47	ADR	41.5	-21	.11	43.08	54	-10.92	-	-	-	-	356	252	H
5	*** 12.375	36.8	PK-U	38.9	-25.6	0	50.1	-	-	74	-23.9	-	-	195	220	V
	*** 12.376	24.08	ADR	38.9	-25.6	.11	37.49	54	-16.51	-	-	-	-	195	220	V
6	*** 17.741	33.71	PK-U	41.5	-21	0	54.21	-	-	74	-19.79	-	-	118	200	V
	*** 17.741	22.58	ADR	41.5	-21	.11	43.19	54	-10.81	-	-	-	-	118	200	V
1	3.188	41.5	PK-U	32.9	-33.9	0	40.5	-	-	-	-	68.2	-27.7	334	313	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

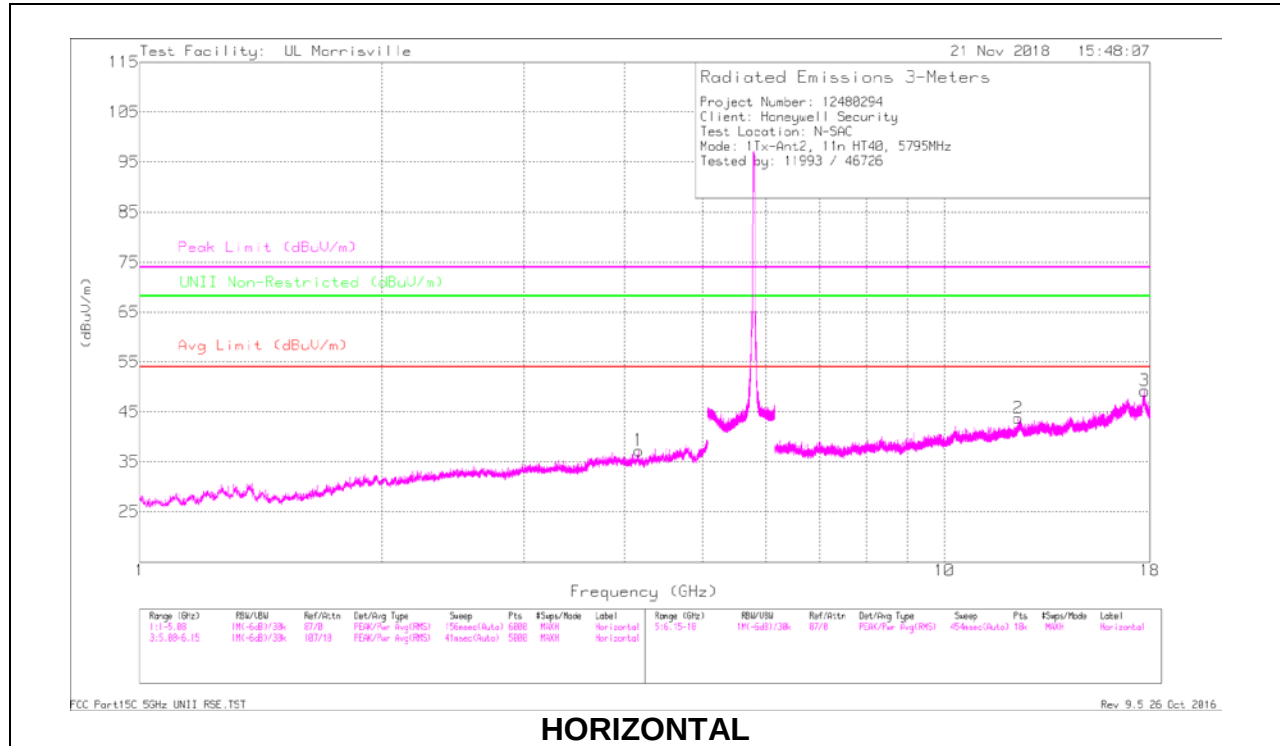

HORIZONTAL

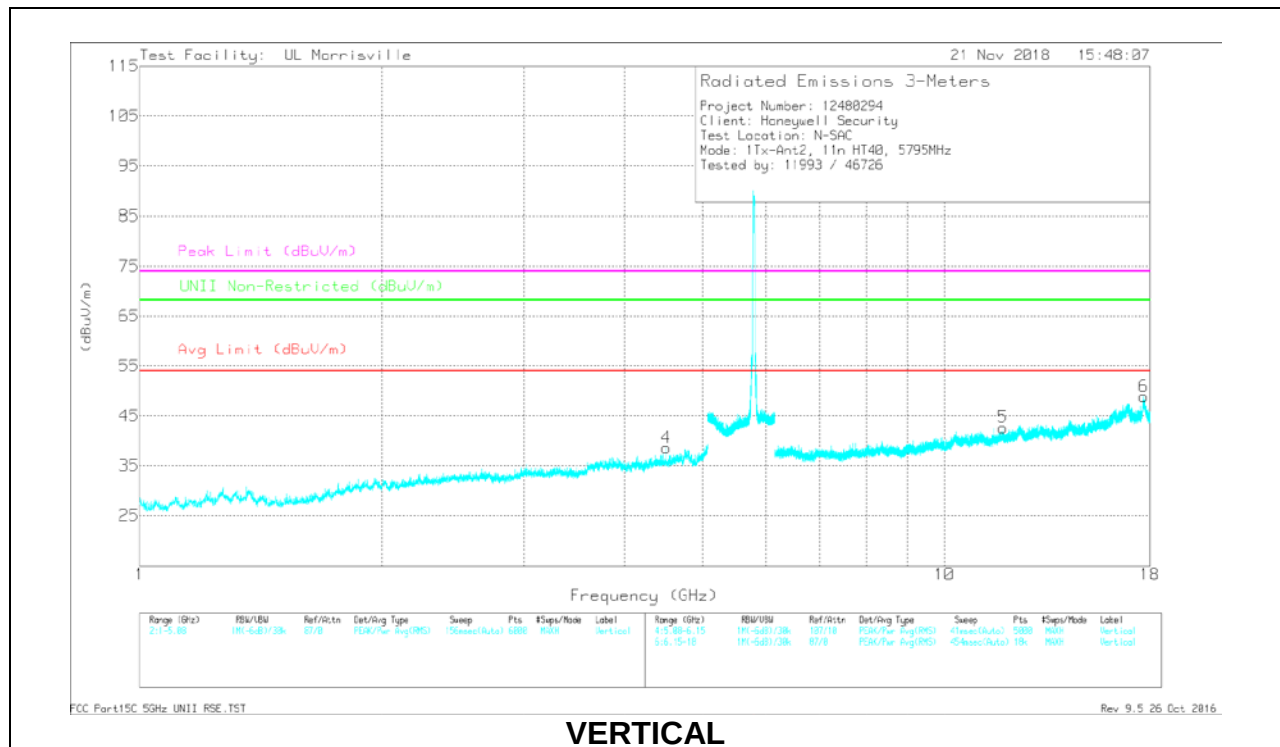

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 AF (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.168	41.33	PK-U	33.5	-32.6	0	42.23	-	-	74	-31.77	-	-	158	172	H
	*** 4.168	29.65	ADR	33.5	-32.5	.11	30.76	54	-23.24	-	-	-	-	158	172	H
4	*** 4.514	43.37	PK-U	33.9	-32.7	0	44.57	-	-	74	-29.43	-	-	356	106	V
	*** 4.514	34.59	ADR	33.9	-32.7	.11	35.9	54	-18.1	-	-	-	-	356	106	V
2	*** 12.35	35.63	PK-U	38.9	-25.9	0	48.63	-	-	74	-25.37	-	-	57	233	H
	*** 12.35	24.28	ADR	38.9	-25.9	.11	37.39	54	-16.61	-	-	-	-	57	233	H
3	*** 17.739	34.66	PK-U	41.5	-21	0	55.16	-	-	74	-18.84	-	-	351	115	H
	*** 17.738	22.54	ADR	41.5	-21	.11	43.15	54	-10.85	-	-	-	-	351	115	H
5	*** 11.826	34.99	PK-U	38.4	-26	0	47.39	-	-	74	-26.61	-	-	33	310	V
	*** 11.822	23.6	ADR	38.4	-26	.11	36.11	54	-17.89	-	-	-	-	33	310	V
6	17.689	34.52	PK-U	41.6	-22	0	54.12	-	-	-	-	68.2	-14.08	155	289	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

9.2. Worst Case Below 1 GHz

Note: All measurements were made at a test distance of 3 m. The limits in the plots are the FCC/IC limits extrapolated from the specification distance (300 m from 9-490 kHz and 30 m from 490 kHz – 30 MHz) to the measurement distance to clearly show the relative levels of fundamental and spurious emissions and demonstrate compliance with the requirement that the level of any spurious emissions be below the level of the intentionally transmitted signal. The extrapolation factor for the limits were $40 \cdot \log$ (specification distance / test distance).

Although these tests were performed at a test site other than an open area test site, adequate comparison measurements were confirmed against an open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

0.009 – 30 MHz DATA – ANTENNA 1

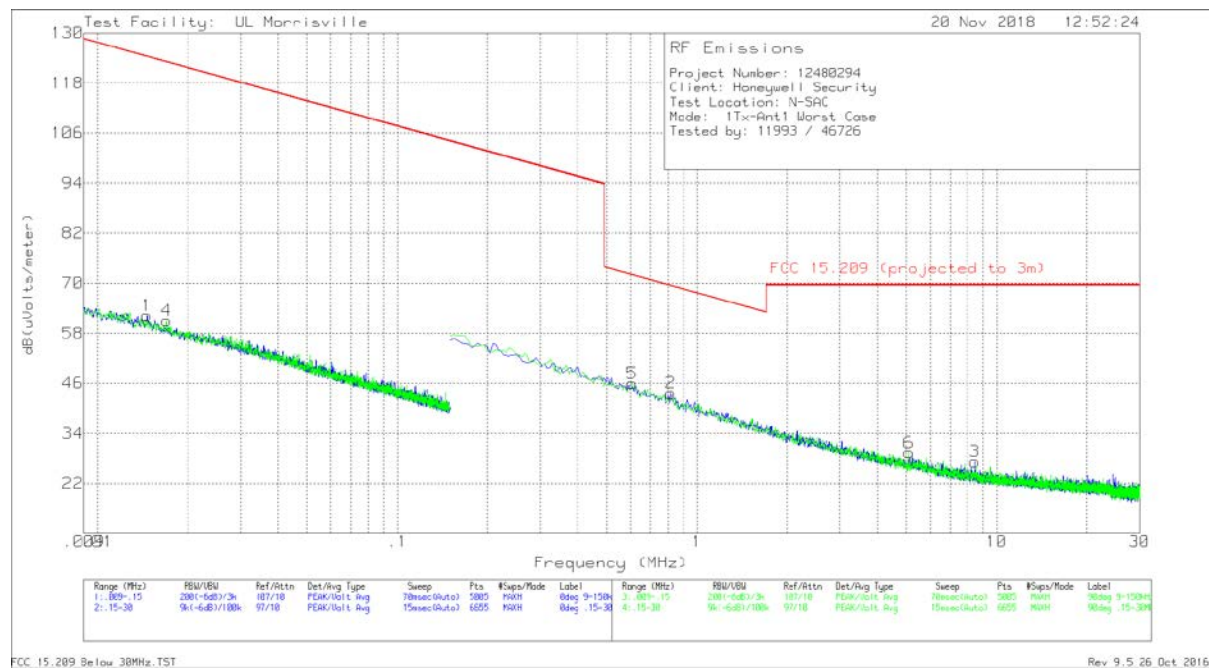


Note: Plot is for reference only to identify frequencies of interest.

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AT0079 AF (dB/m)	Cbl (dB)	Distance Correction Factor (dB)	Corrected Reading dB(uV/m)	FCC 15.209 QP	FCC 15.209 AV	FCC 15.209 PK	Worst-Case Margin (dB)	Azimuth (Degs)
1	.0146	45.41	Pk	16.7	.1	-80	-17.79	-	44.32	64.32	-62.11	0-360
4	.01701	45.26	Pk	15.7	.1	-80	-18.94	-	42.99	62.99	-61.93	0-360
5	.60757	34.31	Pk	11.5	.1	-40	5.91	31.93	-	-	-26.02	0-360
2	.81841	31.92	Pk	11.5	.2	-40	3.62	29.34	-	-	-25.72	0-360
6	5.10703	17.45	Pk	11.5	.4	-40	-10.65	29.54	-	-	-40.19	0-360
3	8.47602	15.59	Pk	11.1	.5	-40	-12.81	29.54	-	-	-42.35	0-360

Pk - Peak detector

0.009 – 30 MHz DATA – ANTENNA 2


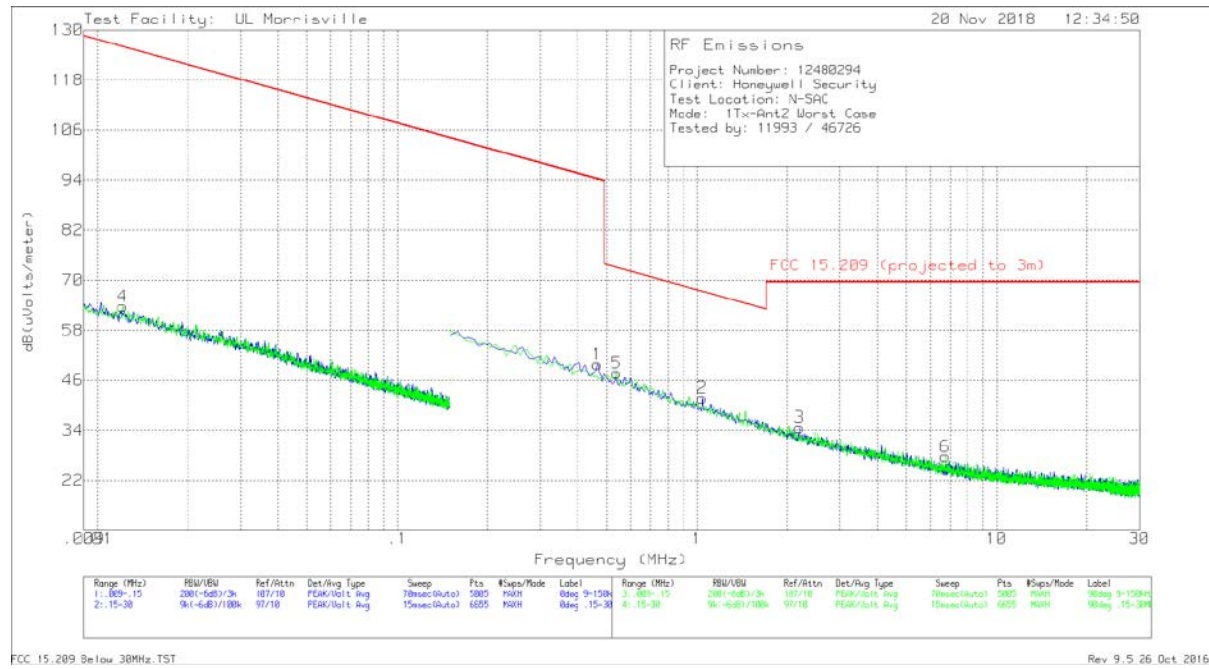


Note: Plot is for reference only to identify frequencies of interest.

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AT0079 AF (dB/m)	Cbl (dB)	Distance Correction Factor (dB)	Corrected Reading dB(u/m)	FCC 15.209 QP	FCC 15.209 AV	FCC 15.209 PK	Worst-Case Margin (dB)	Azimuth (Degs)
4	.01214	45.83	Pk	17.8	.1	-80	-16.27	-	45.92	65.92	-62.19	0-360
1	.46402	38.22	Pk	11.5	.1	-80	-30.18	-	14.27	34.27	-44.45	0-360
5	.54028	36.12	Pk	11.5	.1	-40	7.72	32.95	-	-	-25.23	0-360
2	1.04271	30.07	Pk	11.5	.2	-40	1.77	27.24	-	-	-25.47	0-360
3	2.2001	22.88	Pk	11.6	.2	-40	-5.32	29.54	-	-	-34.86	0-360
6	6.75339	16.03	Pk	11.3	.4	-40	-12.27	29.54	-	-	-41.81	0-360

Pk - Peak detector

30-1000MHz DATA – ANTENNA 1

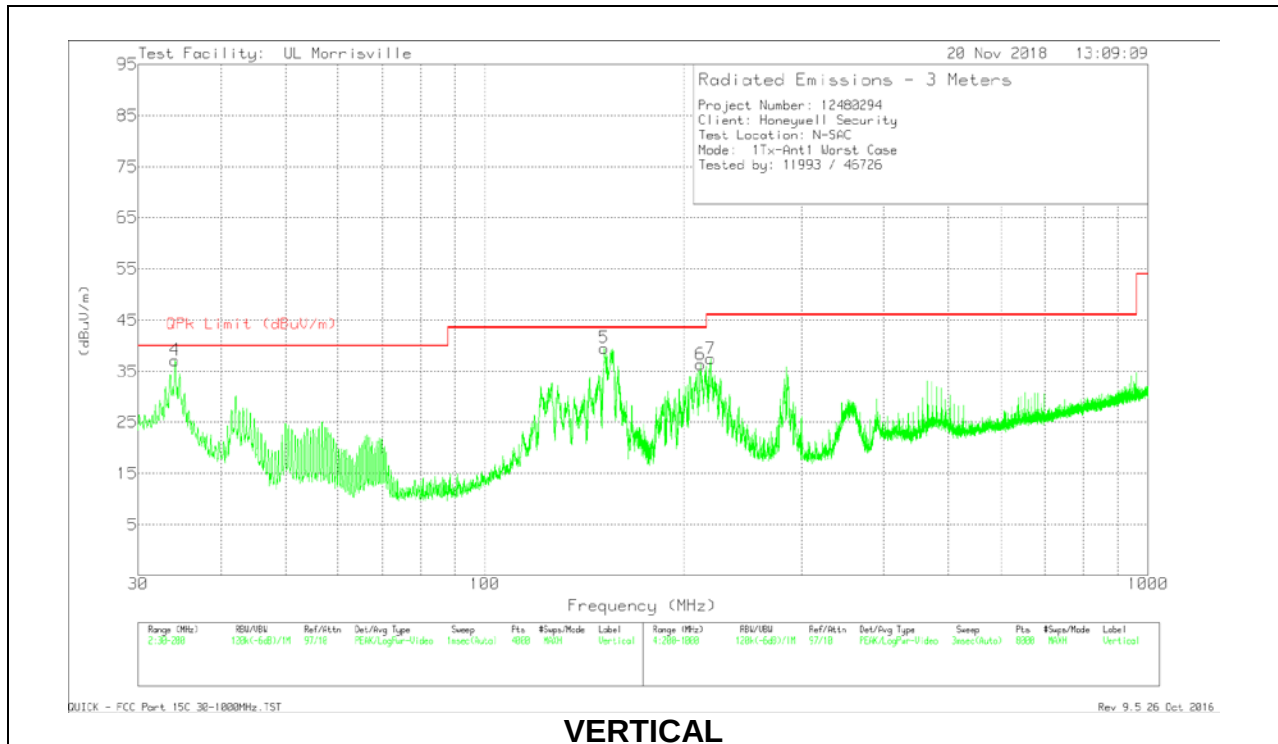
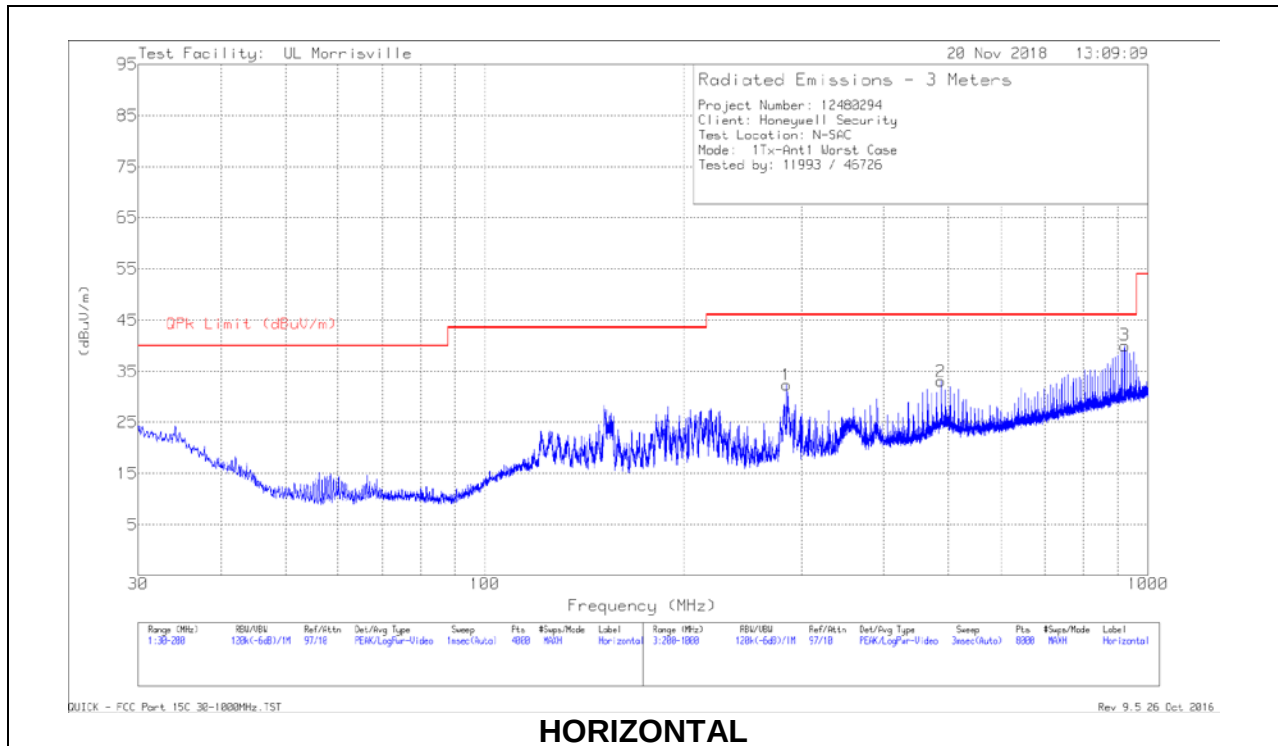


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AT0073 ACF (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	34.0787	41.3	Qp	24.9	-31.7	34.5	40	-5.5	67	106	V
5	151.5246	45.97	Qp	18.9	-30.5	34.37	43.52	-9.15	188	102	V
6	211.5015	49.2	Pk	17.3	-30.1	36.4	43.52	-7.12	0-360	100	V
7	219.0025	49.9	Pk	17.5	-29.9	37.5	46.02	-8.52	0-360	100	V
1	285.0111	41.94	Pk	19.8	-29.5	32.24	46.02	-13.78	0-360	100	H
2	487.4374	37.43	Pk	24.1	-28.5	33.03	46.02	-12.99	0-360	100	H
3	922.467	32.31	Qp	29	-26.1	35.21	46.02	-10.81	164	170	H

Pk - Peak detector

Qp - Quasi-Peak detector

30-1000MHz DATA – ANTENNA 2

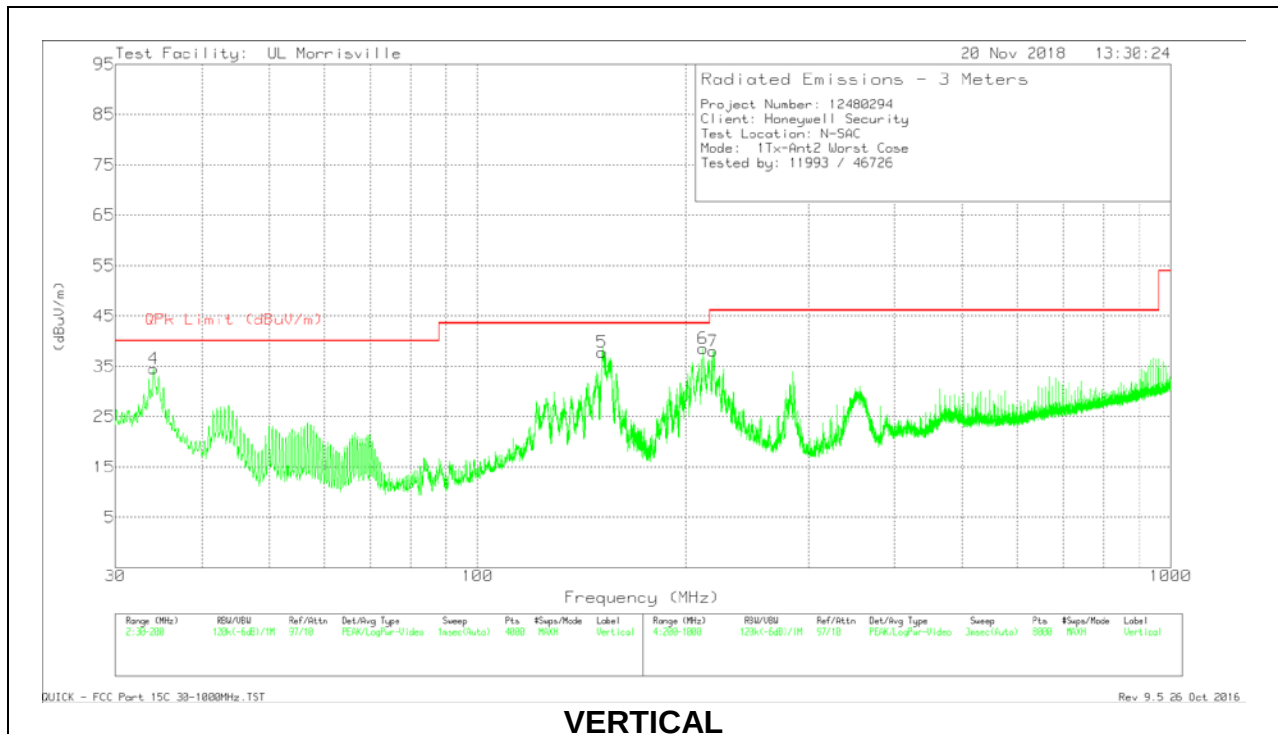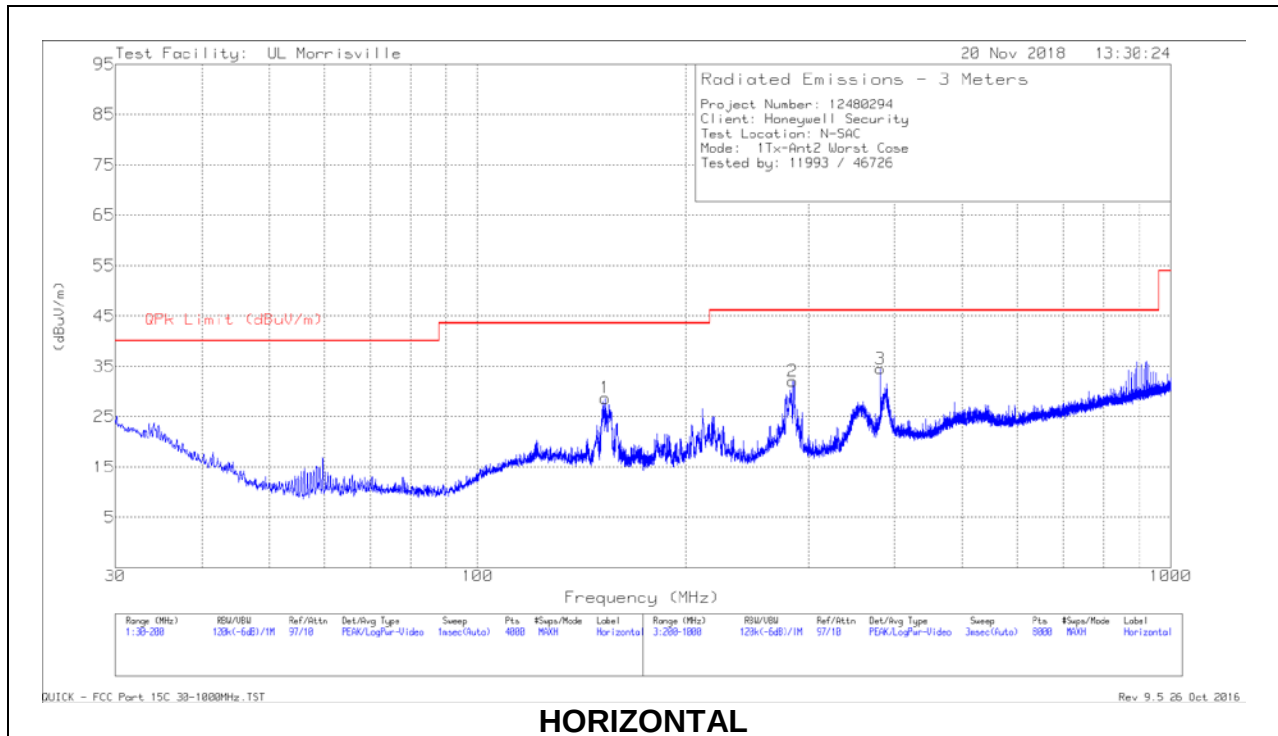



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AT0073 ACF (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	34.0792	39.34	Qp	24.9	-31.7	32.54	40	-7.46	47	118	V
5	151.15	43.87	Qp	18.9	-30.5	32.27	43.52	-11.25	146	103	V
1	152.6867	40.22	Pk	18.9	-30.4	28.72	43.52	-14.8	0-360	102	H
6	211.3017	45.97	Qp	17.3	-30.1	33.17	43.52	-10.35	133	102	V
7	218.8024	50.4	Pk	17.5	-29.9	38	46.02	-8.02	0-360	102	V
2	285.0111	41.74	Pk	19.8	-29.5	32.04	46.02	-13.98	0-360	102	H
3	381.1235	41.6	Pk	21.8	-28.9	34.5	46.02	-11.52	0-360	102	H

Pk - Peak detector

Qp - Quasi-Peak detector

9.3. Worst Case 18-26 GHz

18 – 26GHz DATA – ANTENNA 1

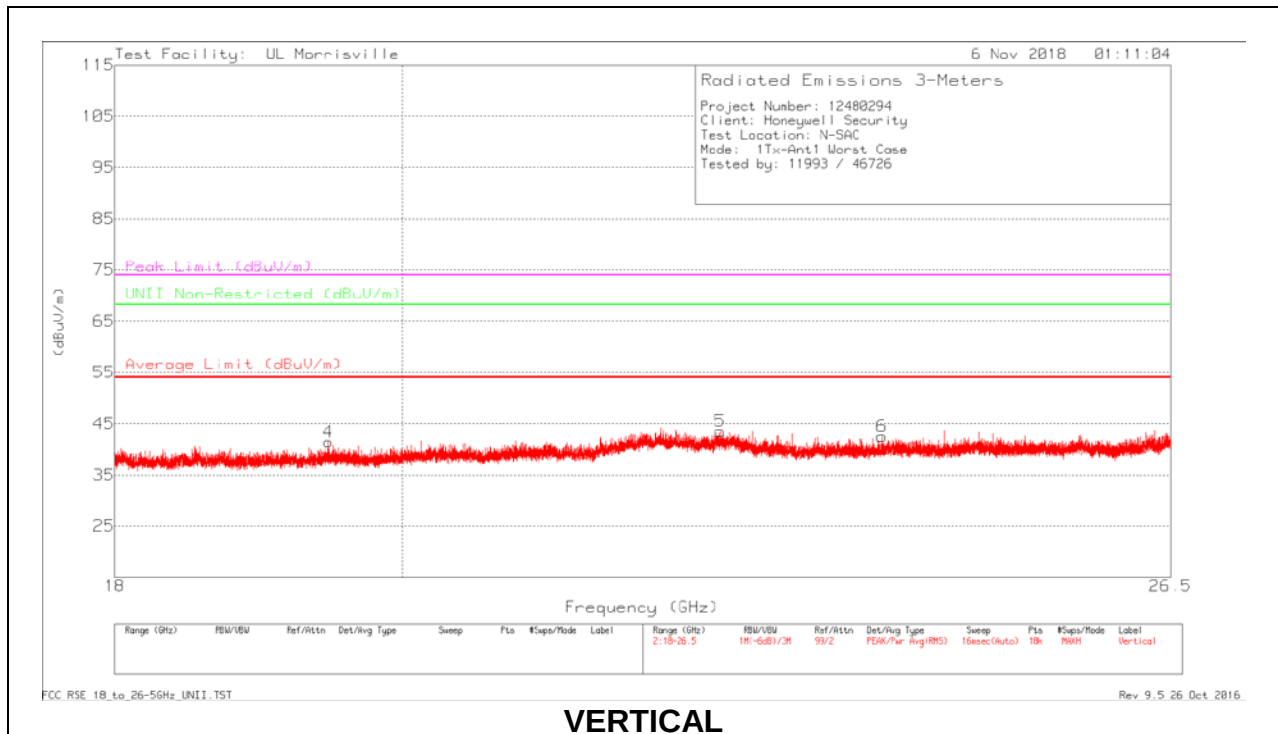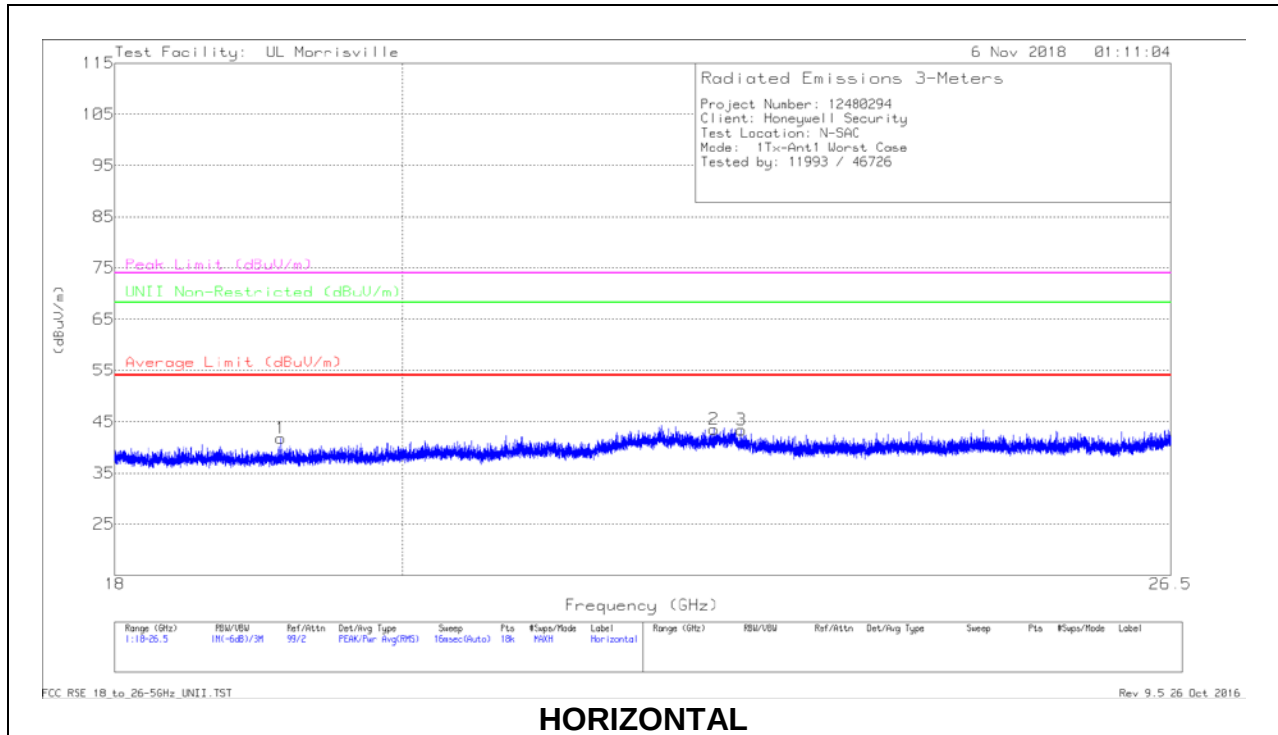



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0063 AF (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 19.129	47.97	Pk	33.4	-39.6	41.77	54	-12.23	74	-32.23	-	-	0-360	149	H
2	* ** 22.417	46	Pk	36.7	-39.2	43.5	54	-10.5	74	-30.5	-	-	0-360	149	H
3	* ** 22.642	46.29	Pk	36.3	-39.2	43.39	54	-10.61	74	-30.61	-	-	0-360	249	H
4	* ** 19.466	47.52	Pk	33.4	-39.5	41.42	54	-12.58	74	-32.58	-	-	0-360	202	V
5	* ** 22.469	46.25	Pk	36.6	-39.3	43.55	54	-10.45	74	-30.45	-	-	0-360	252	V
6	* ** 23.839	46.63	Pk	34.9	-39	42.53	54	-11.47	74	-31.47	-	-	0-360	252	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

18 – 26GHz DATA – ANTENNA 2

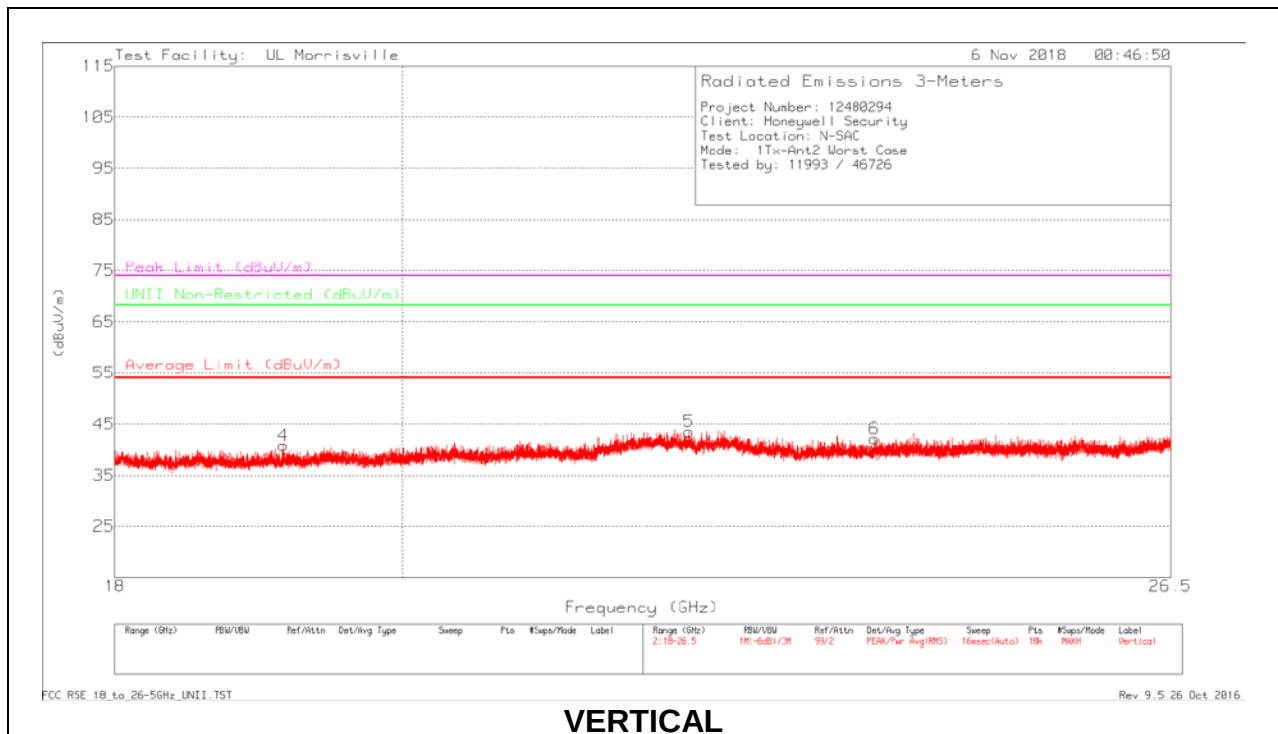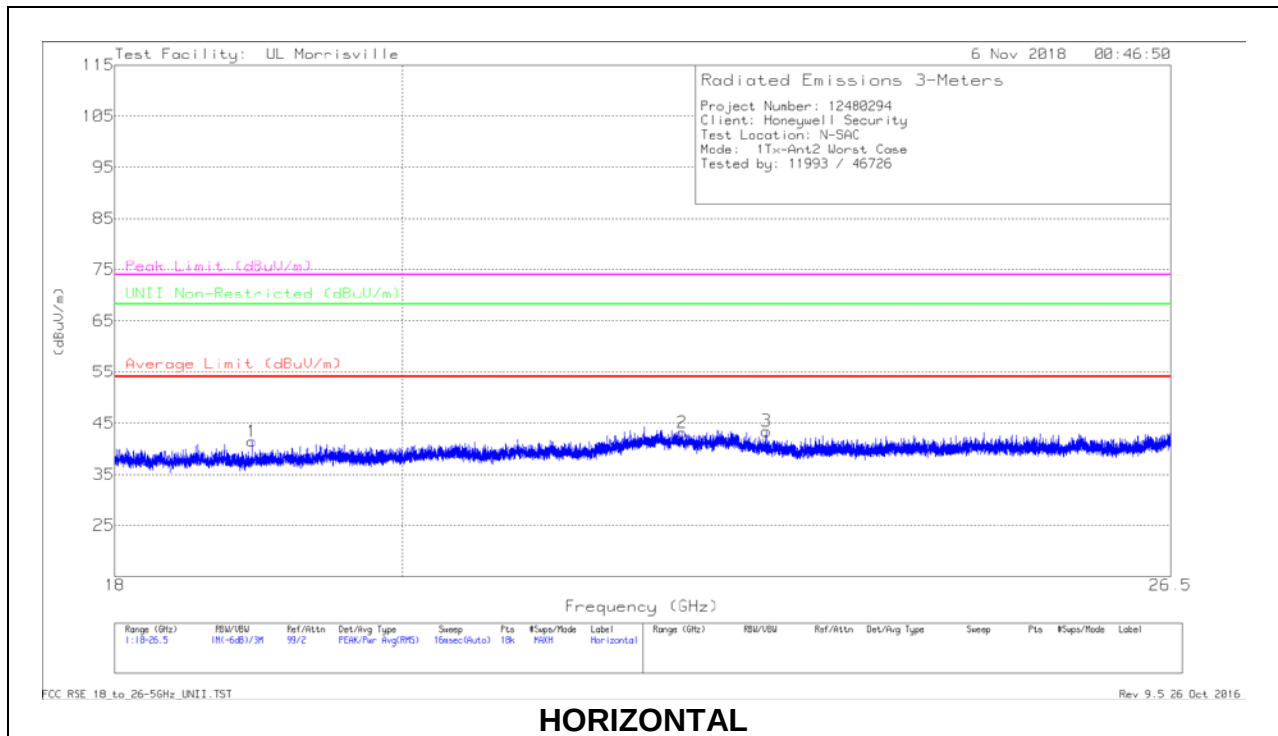

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0063 AF (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 18.926	47.61	Pk	33.3	-39.5	41.41	54	-12.59	74	-32.59	-	-	0-360	199	H
2	* ** 22.161	45.49	Pk	37	-39.3	43.19	54	-10.81	74	-30.81	-	-	0-360	249	H
3	* ** 22.852	47.16	Pk	35.7	-39.4	43.46	54	-10.54	74	-30.54	-	-	0-360	199	H
4	* ** 19.144	47	Pk	33.4	-39.6	40.8	54	-13.2	74	-33.2	-	-	0-360	202	V
5	* ** 22.215	45.95	Pk	36.9	-39.3	43.55	54	-10.45	74	-30.45	-	-	0-360	152	V
6	* ** 23.777	46.26	Pk	34.9	-39	42.16	54	-11.84	74	-31.84	-	-	0-360	202	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

9.4. Worst Case 26-40 GHz

26 – 40GHz DATA – ANTENNA 1

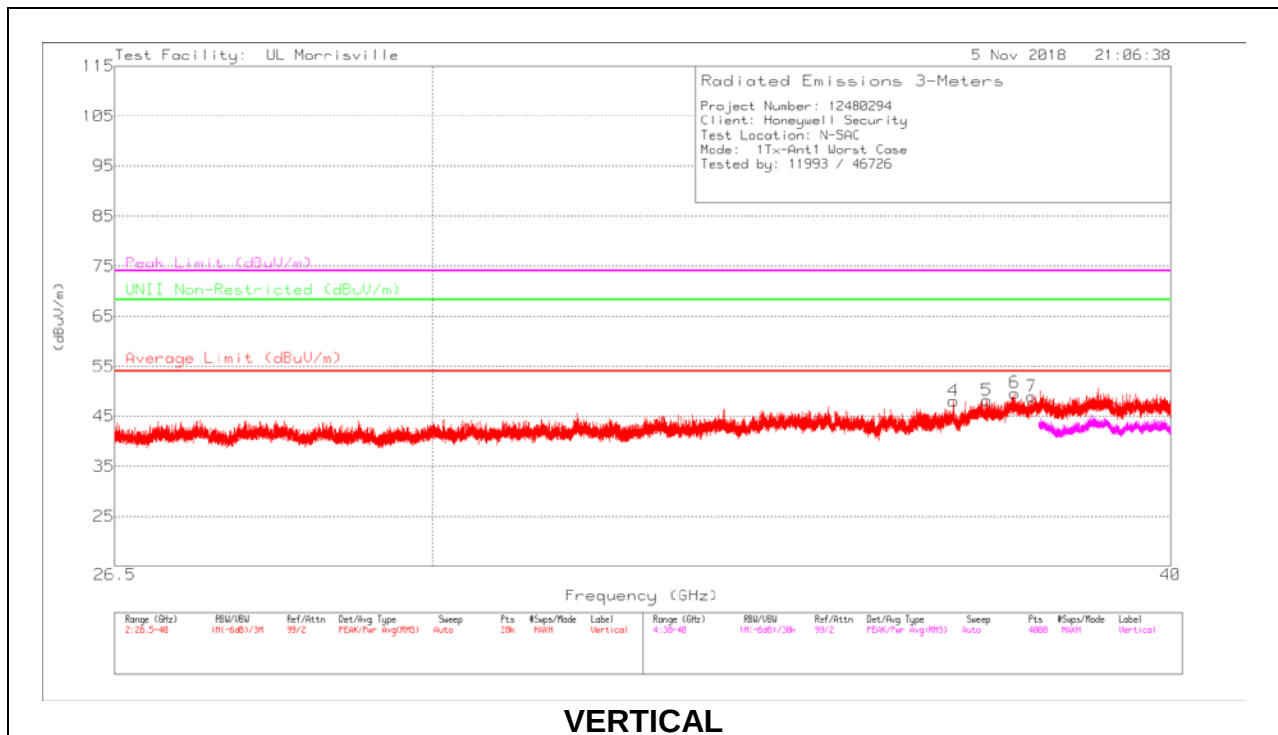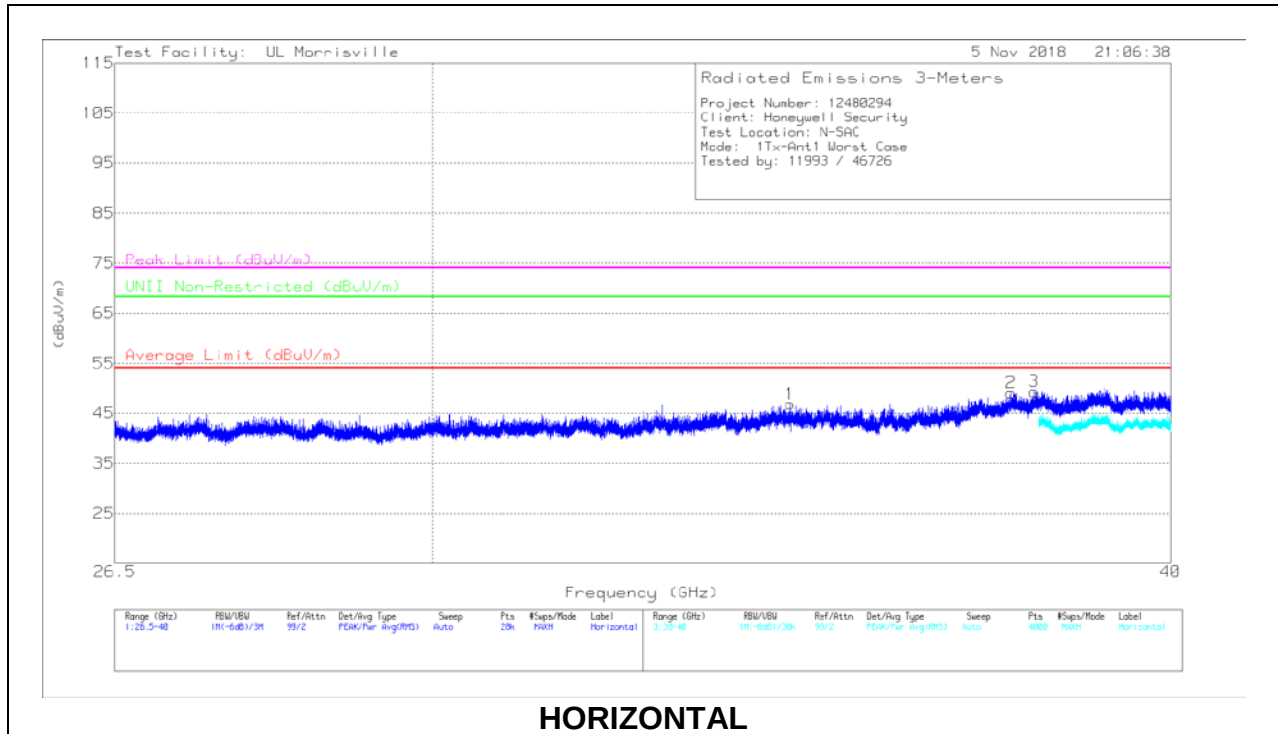

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0061 AF (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	37.588	44.4	PK-U	38.4	-33.5	49.3	-	-	74	-24.7	68.2	-18.9	31	355	H
	37.589	33.23	ADR	38.4	-33.5	38.13	54	-15.87	-	-	-	-	31	355	H
3	37.925	33.23	ADR	38.2	-33.3	38.13	54	-15.87	-	-	-	-	91	252	H
	37.928	45.42	PK-U	38.2	-33.3	50.32	-	-	74	-23.68	68.2	-17.88	91	252	H
1	34.489	45.77	Pk	37.6	-36.5	46.87	-	-	-	-	68.2	-21.33	0-360	102	H
4	36.751	32.67	ADR	37.9	-34.5	36.07	54	-17.93	-	-	-	-	183	352	V
	36.753	44.09	PK-U	37.9	-34.5	47.49	-	-	74	-26.51	68.2	-20.71	183	352	V
5	37.229	44.45	PK-U	38.1	-34.3	48.25	-	-	74	-25.75	68.2	-19.95	34	391	V
	37.229	32.81	ADR	38.1	-34.3	36.61	54	-17.39	-	-	-	-	34	391	V
6	37.638	33.64	ADR	38.3	-33.8	38.14	54	-15.86	-	-	-	-	115	293	V
	37.64	46.28	PK-U	38.3	-33.8	50.78	-	-	74	-23.22	68.2	-17.42	115	293	V
7	37.888	33.29	ADR	38.2	-33.7	37.79	54	-16.21	-	-	-	-	9	305	V
	37.89	44.99	PK-U	38.2	-33.7	49.49	-	-	74	-24.51	68.2	-18.71	9	305	V



PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

Pk - Peak detector

Note – Marker 1 is not in a restricted band.

26 – 40GHz DATA – ANTENNA 2

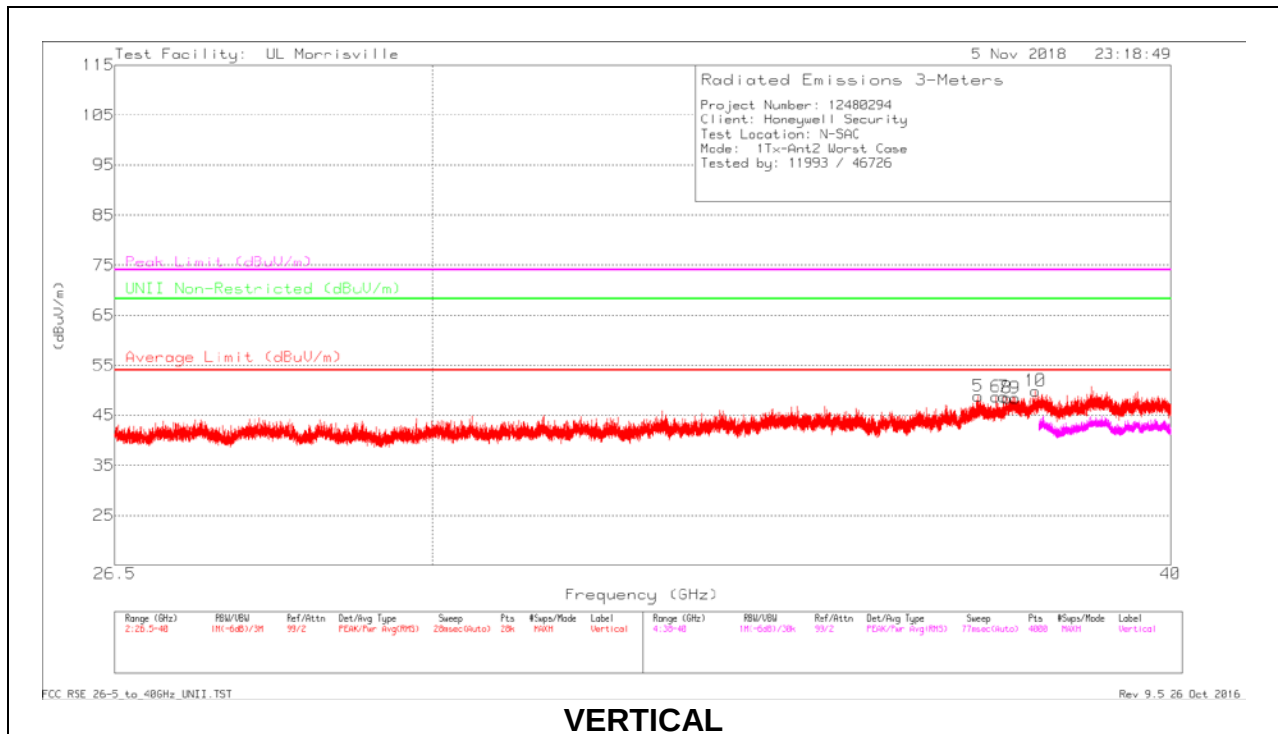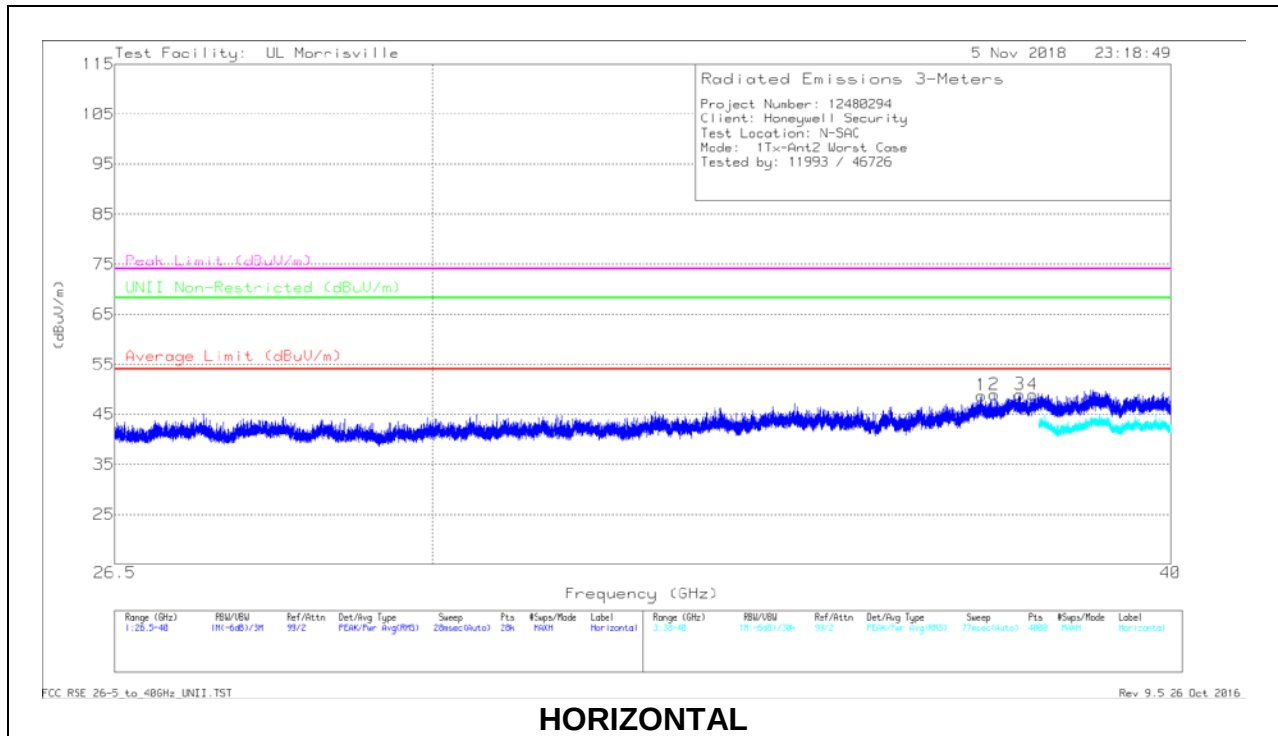

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0061 AF (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	37.108	44.52	PK-U	38.1	-34.4	48.22	54	-5.78	74	-25.78	68.2	-19.98	198	337	V
1	37.151	44.84	PK-U	38.1	-34	48.94	54	-5.06	74	-25.06	68.2	-19.26	166	239	H
2	37.342	43.91	PK-U	38.2	-33.8	48.31	54	-5.69	74	-25.69	68.2	-19.89	356	325	H
6	37.367	45.28	PK-U	38.2	-34	49.48	54	-4.52	74	-24.52	68.2	-18.72	254	353	V
7	37.487	44.11	PK-U	38.3	-33.8	48.61	54	-5.39	74	-25.39	68.2	-19.59	245	111	V
8	37.531	44.66	PK-U	38.3	-33.8	49.16	54	-4.84	74	-24.84	68.2	-19.04	85	173	V
9	37.647	44.75	PK-U	38.3	-33.8	49.25	54	-4.75	74	-24.75	68.2	-18.95	90	390	V
3	37.716	44.14	PK-U	38.3	-33.5	48.94	54	-5.06	74	-25.06	68.2	-19.26	14	378	H
4	37.909	44.47	PK-U	38.2	-33.4	49.27	54	-4.73	74	-24.73	68.2	-18.93	100	224	H
10	37.944	44.02	PK-U	38.2	-33.1	49.12	54	-4.88	74	-24.88	68.2	-19.08	254	251	V

PK-U - U-NII: Maximum Peak

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both lines.

RESULTS


10.1.1. AC POWER LINE – ANTENNA 1

LINE 1 RESULTS

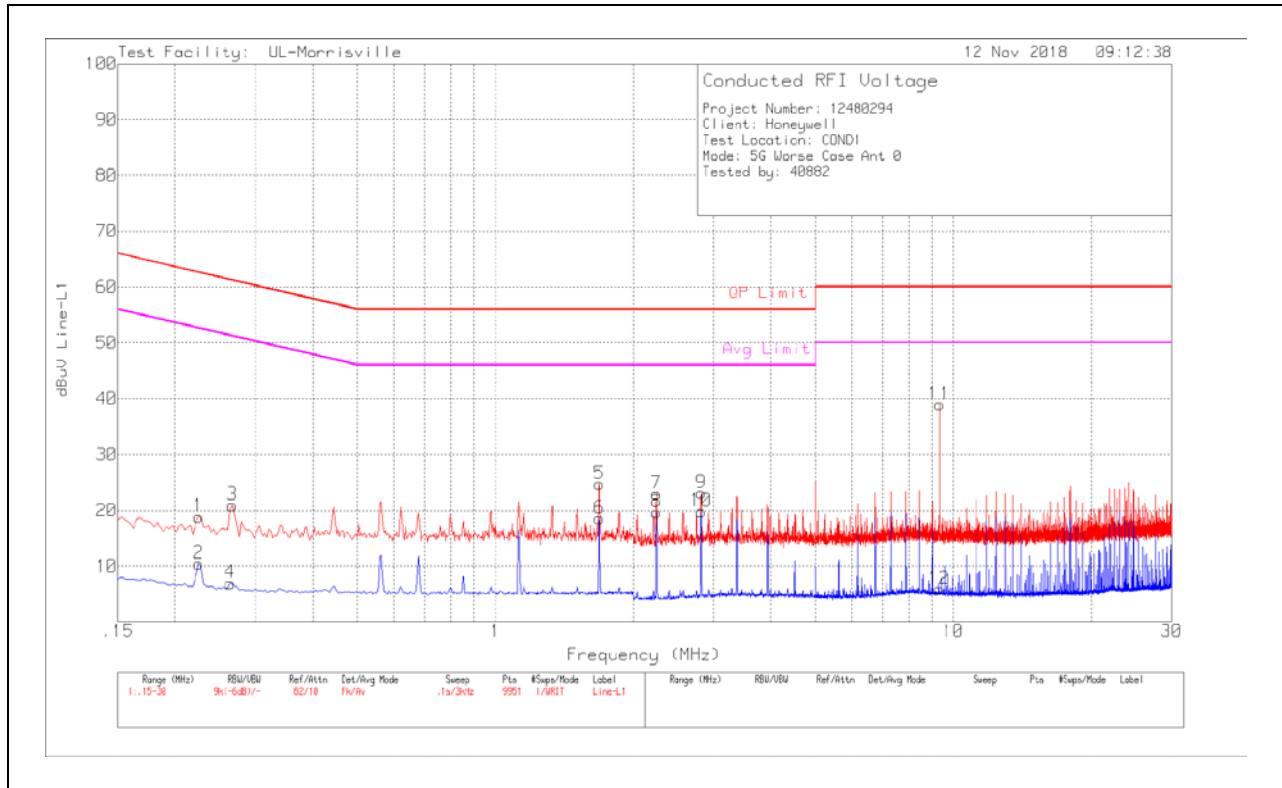

Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit	Margin (dB)	Avg Limit	Margin (dB)
1	.225	8.79	Pk	.1	10	18.89	62.63	-43.74	-	-
2	.225	.33	Av	.1	10	10.43	-	-	52.63	-42.2
3	.267	10.86	Pk	.1	10	20.96	61.21	-40.25	-	-
4	.264	-3.13	Av	.1	10	6.97	-	-	51.3	-44.33
5	1.689	14.74	Pk	0	10	24.74	56	-31.26	-	-
6	1.689	8.55	Av	0	10	18.55	-	-	46	-27.45
7	2.25	12.88	Pk	0	10.1	22.98	56	-33.02	-	-
8	2.25	9.59	Av	0	10.1	19.69	-	-	46	-26.31
9	2.814	13.02	Pk	0	10.1	23.12	56	-32.88	-	-
10	2.814	9.75	Av	0	10.1	19.85	-	-	46	-26.15
11	9.324	28.58	Pk	.1	10.3	38.98	60	-21.02	-	-
12	9.309	-4.47	Av	.1	10.3	5.93	-	-	50	-44.07


LINE 2 RESULTS

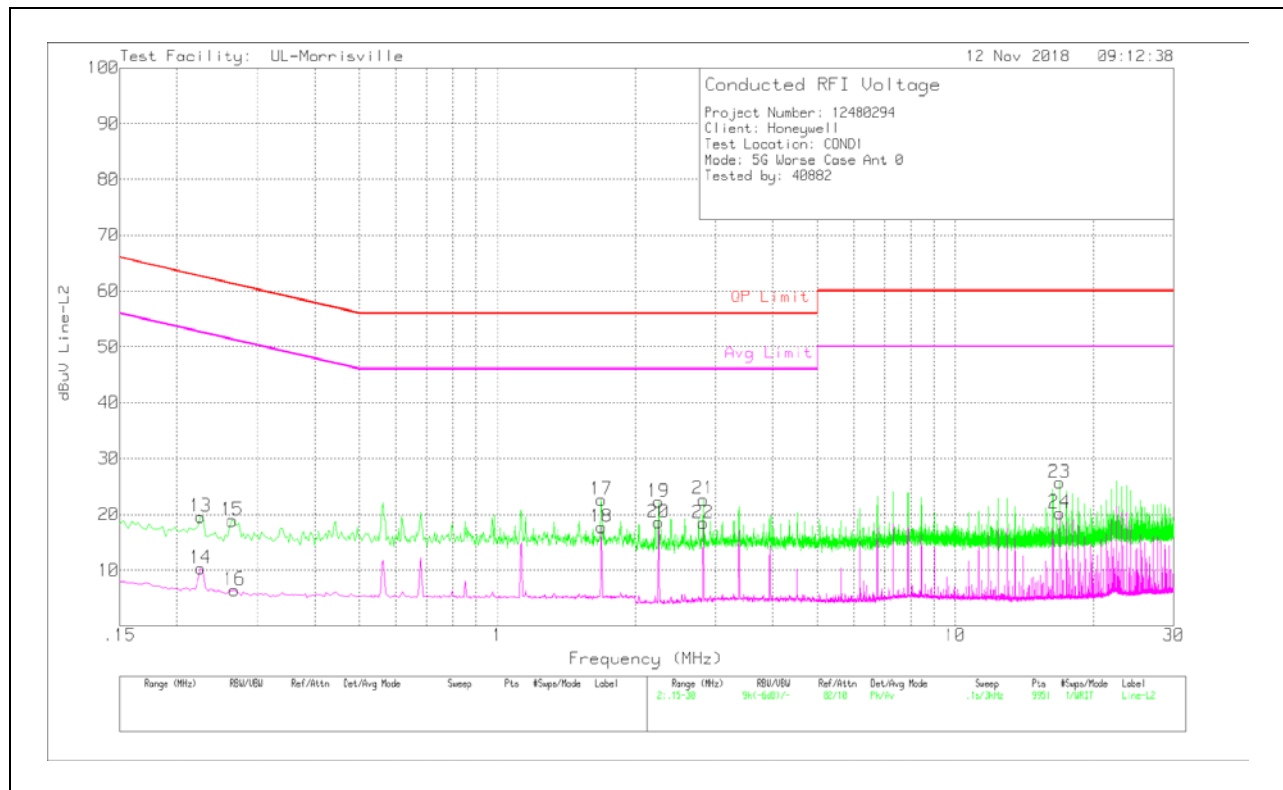

Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBμV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBμV	QP Limit	Margin (dB)	Avg Limit	Margin (dB)
13	.225	9.5	Pk	.1	10	19.6	62.63	-43.03	-	-
14	.225	.25	Av	.1	10	10.35	-	-	52.63	-42.28
15	.264	8.8	Pk	.1	10	18.9	61.3	-42.4	-	-
16	.267	-3.63	Av	.1	10	6.47	-	-	51.21	-44.74
17	1.689	12.64	Pk	0	10	22.64	56	-33.36	-	-
18	1.689	7.7	Av	0	10	17.7	-	-	46	-28.3
19	2.253	12.15	Pk	0	10.1	22.25	56	-33.75	-	-
20	2.253	8.45	Av	0	10.1	18.55	-	-	46	-27.45
21	2.817	12.6	Pk	0	10.1	22.7	56	-33.3	-	-
22	2.817	8.34	Av	0	10.1	18.44	-	-	46	-27.56
23	16.899	15.12	Pk	.1	10.5	25.72	60	-34.28	-	-
24	16.899	9.63	Av	.1	10.5	20.23	-	-	50	-29.77

10.1.2. AC POWER LINE – ANTENNA 2


LINE 1 RESULTS

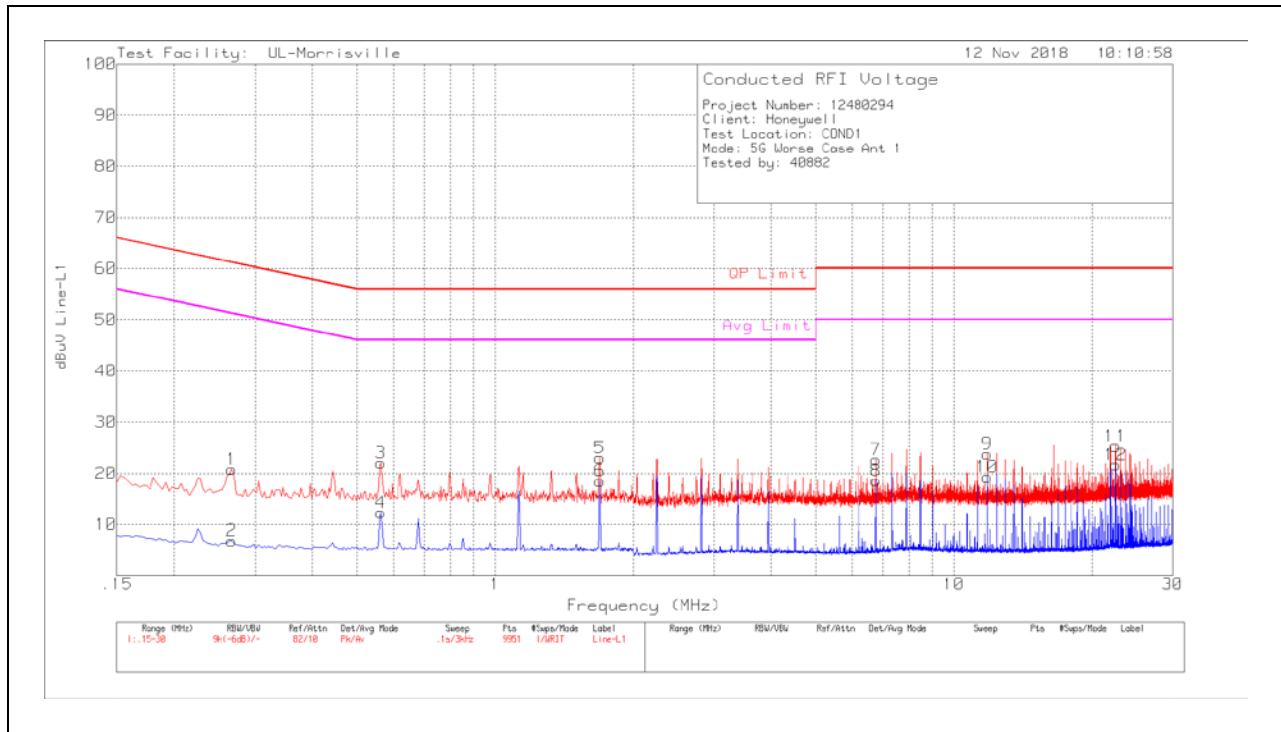

Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit	Margin (dB)	Avg Limit	Margin (dB)
1	.267	10.68	Pk	.1	10	20.78	61.21	-40.43	-	-
2	.267	-3.28	Av	.1	10	6.82	-	-	51.21	-44.39
3	.564	12	Pk	0	10	22	56	-34	-	-
4	.564	2.29	Av	0	10	12.29	-	-	46	-33.71
5	1.692	12.98	Pk	0	10	22.98	56	-33.02	-	-
6	1.692	8.52	Av	0	10	18.52	-	-	46	-27.48
7	6.762	12.35	Pk	.1	10.2	22.65	60	-37.35	-	-
8	6.762	8.25	Av	.1	10.2	18.55	-	-	50	-31.45
9	11.835	13.4	Pk	.1	10.3	23.8	60	-36.2	-	-
10	11.835	8.87	Av	.1	10.3	19.27	-	-	50	-30.73
11	22.542	14.49	Pk	.2	10.6	25.29	60	-34.71	-	-
12	22.545	10.82	Av	.2	10.6	21.62	-	-	50	-28.38

sadfasdf

LINE 2 RESULTS

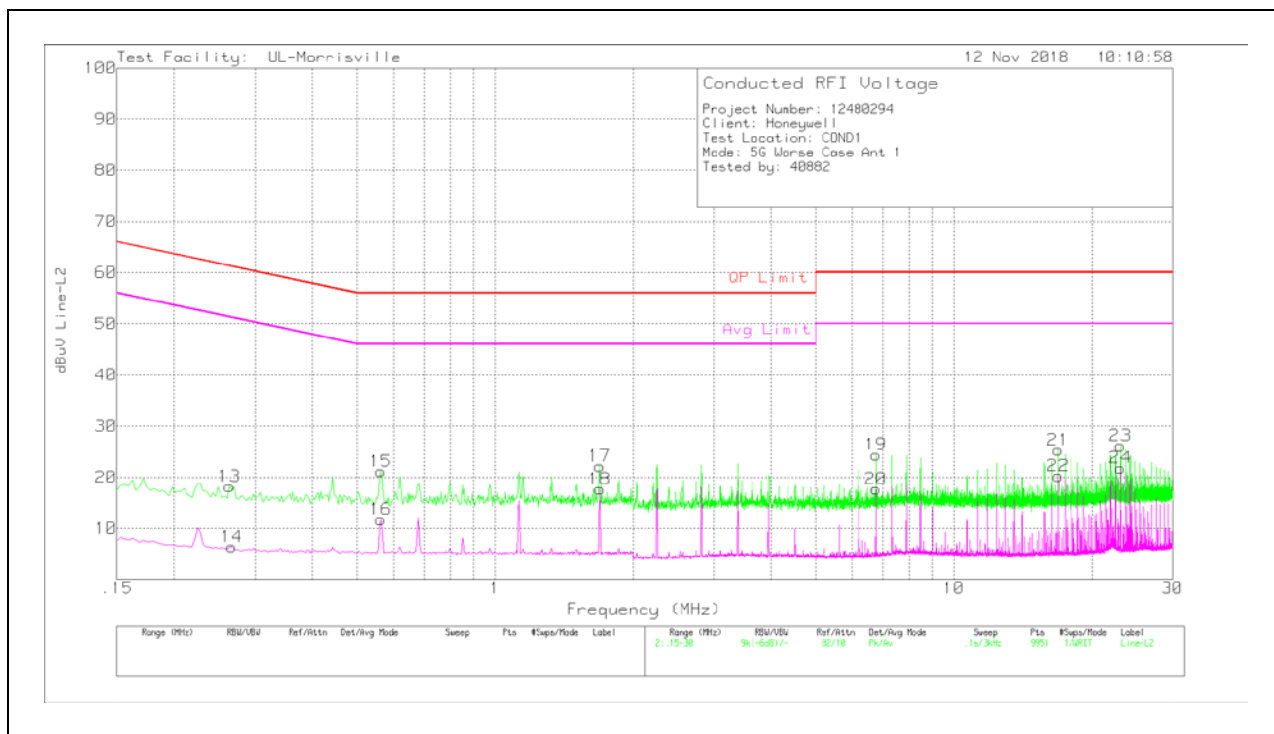

Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit	Margin (dB)	Avg Limit	Margin (dB)
13	.264	8.14	Pk	.1	10	18.24	61.3	-43.06	-	-
14	.267	-3.72	Av	.1	10	6.38	-	-	51.21	-44.83
15	.564	11.16	Pk	0	10	21.16	56	-34.84	-	-
16	.564	1.77	Av	0	10	11.77	-	-	46	-34.23
17	1.692	12.19	Pk	0	10	22.19	56	-33.81	-	-
18	1.692	7.75	Av	0	10	17.75	-	-	46	-28.25
19	6.765	14.12	Pk	.1	10.2	24.42	60	-35.58	-	-
20	6.765	7.44	Av	.1	10.2	17.74	-	-	50	-32.26
21	16.911	14.75	Pk	.1	10.5	25.35	60	-34.65	-	-
22	16.908	9.65	Av	.1	10.5	20.25	-	-	50	-29.75
23	23.109	15.35	Pk	.2	10.6	26.15	60	-33.85	-	-
24	23.109	11.04	Av	.2	10.6	21.84	-	-	50	-28.16

Pk - Peak detector
Av - Average detection

11. SETUP PHOTOS

Please refer to R12480294-EP1 for setup photos

END OF TEST REPORT