

MEASUREMENT / TECHNICAL REPORT

Fujitsu Siemens Computers

Model: Personal Computer Scenic DT6

FCC ID: HSSSCENIC6511

Dec. 17, 1999

<p>This report concerns: <input type="checkbox"/> Original grant Class II change</p> <p>Equipment type: Personal Computer</p>		
<p>Request issue of grant: <input type="checkbox"/> Immediately upon completion of review</p> <p><input type="checkbox"/> Defer grant per 47 CFR 0.457(d)(1)(ii) until _____ date _____. Company Name agrees to notify the Commission by _____ date _____ of the intended date of announcement of the product so that the grant can be issued on that date.</p>		
<p>Measurement procedure used: ANSI C63.4-1992</p> <p><input type="checkbox"/> FCC/OET MP-4(1987)</p> <p><input type="checkbox"/> other _____</p>		
<p>Limits on compliance with: CISPR 22 resp. FCC class B</p>		
<p>Application for Certification prepared by: Guenther Roesch Siemens PC Systeme GmbH & Co. KG Buergermeister-Ulrich-Str. 100 86199 Augsburg Germany Tel.: +49 821 804-2821 Fax: +49 821 804 2675</p>		<p>Applicant for this device:</p> <p>Siemens PC Systeme GmbH & Co. KG Buergermeister-Ulrich-Str. 100 86199 Augsburg Germany Tel.: +49 821 804-0</p>

	<p>Engineer: _____ Martin Heuser Fujitsu Siemens Computers Personal Computer Scenic DT6</p> <p>FCC Identifier: HSSSCENIC6511</p>	<p>Date: Dec. 17, 1999</p> <p>Page: 1/40</p>
---	--	--

Table of Contents

1 GENERAL INFORMATION	4
1.1 Product Description	4 - 6
1.2 Related Submittal(s)/Grant(s)	7
1.3 Tested System Details	7 - 9
1.4 Test Methodology	10
1.5 Test Facility	10
1.6 Referenced Rules Sections	10
2 PRODUCT LABELING	11
Figure 2.1 FCC ID Label: see original grant, date: Feb. 23, 1999	11
Figure 2.2 Location of Label on EUT: see original grant, date: Feb. 23, 1999	11
3 SYSTEM TEST CONFIGURATION	12
3.1 Justification	12 - 13
3.2 Video Mode Justification	14 - 15
3.3 EUT Exercise Software	16
3.4 Special Accessories	16
3.5 Equipment Modifications	17
3.6 Configuration of Tested System	17
Figure 3.1 Configuration of Tested System	18
4 BLOCK DIAGRAM OF EQUIPMENT UNDER TEST	19
4.1 Block Diagram Description	19
4.2 Clockfrequencies of the EUT	20
4.3 Theory of Operation	20
Figure 4.1 Block Diagram	21
5 CONDUCTED EMISSION DATA	22
5.1 Test Procedure	22
5.2 Measured Data: see attached file	22 - 25
5.3 Referenced Rules	26
5.4 Test Instrumentation Used, Conducted Measurement	26

6 RADIATED EMISSION DATA	27
6.1 Test Procedure	27
6.2 Measured Data: see attached file	28 - 31
6.3 Reference Rules Sections	32
6.4 Test Instrumentation Used, Radiated Measurement	32
6.5 Field Strength Calculation	33
6.6 Table of Correction Factors	34 - 36
7 CONDUCTED AND RADIATED MEASUREMENT PHOTOS: see attached files	37
8 EXTERNAL PHOTOS OF EUT: see original grant, date Feb. 23, 1999	38
9 INTERNAL PHOTOS OF EUT: see attached files	39
10 USER MANUAL: see original grant, date Feb. 23, 1999	40

1 GENERAL INFORMATION

1.1 Product Description

The Siemens Computer Scenic DT6 is a compact desktop personal computer. The system board integrates the Pentium Processor, memory, and I/O-technologies. The system now can be assembled with Processor Intel Pentium III 750 MHz.

Original grant, dated: Feb. 23, 1999
First class II change, dated: Aug. 18, 1999

Description of the power supplies:

- Power supplies:

ASTEC, model	AA20660 S26113-E427-V30
Minebea, model	SPW1562-1 S26113-E427-V20

Features Overview:

Chip Set

- Vendor: Intel
- Type: Natoma 82440BX
PAC 82443BX & PIIX4E82371EB

Intelligent drive electronics (IDE) interface

- Feature: Enhanced bus master ATA33 IDE interface incl. EIDE

Universal serial bus (USB) interface

- Support: 12 Mbits/s
Windows 98™ and Windows NT™
- Connector: Two external USB connectors

Super I/O

- Vendor: SMSC
- Type: FDC37M807

Keyboard and mouse interface

- Feature: Keyboard and mouse interface
- Support: Connector exchange
- Power fused with polyswitch
- External connector: Two external PS/2 Mini-DIN connectors

Parallel port interface

- Feature: One parallel port
- Support: EPP / ECP capable
- Interrupts / DMA channels route able for PnP
- Connector: One external standard parallel port

Serial port interface

- Feature: Two serial ports with FIFO, 16550 compatible
- Support: One external serial (COM1) port
- Internal chip card reader port of external serial (COM2)
- Port via wire
- Interrupts route able for PnP
- Connector: One external standard and one internal connector

Main memory

- Support: The system needs at least one module and can manage at most three SDRAM modules.
- Size: From 16 Mbytes up to 768 Mbytes SDRAM
- Technology: 100 MHz unbuffered DIMM modules.
168 Pin, 3,3 V, 64 Bit, 72 Bit (with ECC), 100 MHz SDRAM
- Granularity: For one socket 16, 32, 64, 128 or 256 Mbyte.

LAN – Ethernet controller

- Vendor: Intel
- Type: 82559
- Feature: 10/100 Mbit/s

The personal computer is assembled by Siemens PC Systeme GmbH & Co. KG,
Bürgermeister-Ulrich-Str. 100, 86199 Augsburg.



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6511

Date: **Dec. 17, 1999**

Page:
6/40

1.2 Related Submittal Grant

N/A

1.3 Tested System Details

The FCC IDs for all equipment, plus description of all cables used in the tested system are:

Pos	Model Number (Serial Number)	FCC ID	Description	Cable Description (length in [cm])
1	Fujitsu Siemens Computers Scenic 661 (DT6)	HSSSCENIC6511	PC EUT	unshielded power cord [292]
2	Fujitsu Siemens Computers MCM 17P1	YEDA175920	Monitor	unshielded power cord [175] shielded video cable [168]
3	Fujitsu Siemens Computers S26381-K210-V120	HSS01TASTK210	Keyboard	shielded keyboard cable [143]
4	Cherry MY3000USB4A 000468K37	DOC	Keyboard	shielded keyboard cable [143]
5	Microsoft MS 2.1A 1825831-00000	C3KKMP3	Mouse	shielded mouse cable [183]



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6511

Date: **Dec. 17, 1999**

Page:
7/40

Pos	Model Number (Serial Number)	FCC ID	Description	Cable Description (length in [cm])
6	Microsoft Intelli mouse 1.1A 0015096-00000	DOC: m/n:IM1	USB mouse	shielded mouse cable [197]
7	Hewlett Packard HP 2225C+ (2910S40941)	DSI6XU2225	Printer, parallel I/F	unshielded AC ca- ble [180], shielded centronics cable [190]
8	Hewlett Packard HP 2225D+ (3019S70991)	DSI6XU2225	Printer, serial I/F	unshielded power cord [185], shiel-ded serial cable [190]
9	Bay Networks HUB 100BaseT	N/A	HUB	shielded cable
	<u>Pos 1 contains:</u>			
a ₁	ASTEC (UK), AA20650 SNI: S26113-E425-V30	N/A	Power supply	
a ₂	Minebea SPW1553-1 SNI: S26113-E425-V20	N/A	Power supply	



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6511

Date: Dec. 17, 1999

Page:
8/40

Pos	Model Number (Serial Number)	FCC ID	Description	Cable Description (length in [cm])
b	Fujitsu Siemens Computers S26361-D1107-A11 GS 3	N/A	System board	
c	Hyundai PC100-322-620	N/A	SDRAM	
d	Intel Pentium III 80526/PY750256	N/A	Processor module	
e	Matrox G200 AGP	DOC: G2+/MILA/8B/20	Graphic controller board	
f	Quantum Fireball EX 6.4A S26361-H426-V100	N/A	Hard disk drive	
g	Toshiba XM-6302B S26361-H402-V500	CJ6AT98-032	CD-ROM drive	
h	SONY MPF920-C	N/A	Floppy disk drive	

Remark: position 1a₁ / 1a₂ optional



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6511

Date: Dec. 17, 1999

Page:
9/40

1.4 Test Methodology

Both, conducted and radiated tests were performed according to the procedures in ANSI C63.4-1992. Radiated testing below 1 GHz was performed at an antenna to EUT distance of 10 meters above 1 GHz at an antenna to EUT distance of 3 meters. All radiated emission measurements were done in an anechoic chamber. Limits for radiated and conducted emission are in compliance with CISPR 22 resp FCC class B.

1.5 Test Facility

The anechoic chamber and conducted measurement facility used to collect the emission data is located at Siemens PC Systeme GmbH & Co. KG, Bürgermeister Ulrich Str. 100, 86199 Augsburg, Germany. This site has been fully described in a report dated January 24, 1997 sub-mitted to your office, and accepted in a letter dated March 03, 1997 (31040/SIT).

1.6 Referenced Rules Sections

N/A



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6511

Date: Dec. 17, 1999

Page:
10/40

2 PRODUCT LABELING

2.1 FCC ID Label

see original grant, date: Feb. 23, 1999

2.2 Location of Label on EUT

see original grant, date: Feb. 23, 1999



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6511

Date: Dec. 17, 1999

Page:
11/40

3 SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a maximum fashion (as a customer can use it). Each type of external ports was connected with a peripheral unit (e.g. serial port connected to a serial printer, external keyboard port connected to a keyboard and so on). During radiated emission the monitor was powered via system unit, during conducted emission also the external monitor supply was tested.

The system clock is 100 MHz, the clock frequency was tested with the corresponding worst case processor:

100 MHz clock: Intel Pentium III 750 MHz

The system is provided with two kinds of power supplies:

- ASTEC, AA20650 FSC: S26113-E425-V30
- Minebea, SPW1553-1 FSC: S26113-E425-V20

According both worst case results concerning the test report of the original grant (dated: Feb. 23, 1999) and the results of the first class II change (dated Aug. 18, 1999) the following configurations have been tested:

Referring to radiated emission the following (worst case) results are applicable:

ASTEC PSU, model AA20660:

Frequency range 30 MHz - 1 GHz:

100 MHz clock/Pentium III 750 MHz, video resolution 1024 x 768/100 Hz

Frequency range 1 GHz - 5 GHz:

100 MHz clock/Pentium III 750 MHz, video resolution 1024 x 768/100 Hz

Minebea PSU, model SPW1562-1:

Frequency range 30 MHz - 1 GHz:

100 MHz clock/Pentium III 750 MHz, video resolution 1024 x 768/100 Hz

Frequency range 1 GHz - 5 GHz:

100 MHz clock/Pentium III 750 MHz, video resolution 1024 x 768/100 Hz

Referring to conducted emission the following (worst case) results are applicable:

ASTEC PSU, model AA20660:

100 MHz clock/Pentium III 750 MHz, video resolution 1024 x 768/100 Hz
monitor power via EUT

100 MHz clock/Pentium III 750 MHz, video resolution 1024 x 768/100 Hz
monitor power from peripheral device LISN

Minebea PSU, model SPW1562-1:

100 MHz clock/Pentium III 750 MHz, video resolution 1024 x 768/100 Hz
monitor power via EUT

100 MHz clock/Pentium III 750 MHz, video resolution 1024 x 768/100 Hz
monitor power from peripheral device LISN

3.2 Video mode Justification

The system was tested in video graphic mode 1024 x 768 / 100 Hz. The worst case combination according the test results of the original grant (dated: Feb. 23, 1999) and the first class II change (dated: Aug. 18, 1999) have been tested:

The following data are applicable:

radiated emission:

ASTEC PSU, model AA20660:

Frequency range 30 MHz - 1 GHz:

100 MHz clock/Pentium III 750 MHz, video resolution 1024 x 768/100 Hz

Frequency range 1 GHz - 5 GHz:

100 MHz clock/Pentium III 750 MHz, video resolution 1024 x 768/100 Hz

Minebea PSU, model SPW1562-1:

Frequency range 30 MHz - 1 GHz:

100 MHz clock/Pentium III 750 MHz, video resolution 1024 x 768/100 Hz

Frequency range 1 GHz - 5 GHz:

100 MHz clock/Pentium III 750 MHz, video resolution 1024 x 768/100 Hz

conducted emission:

ASTEC PSU, model AA20660:

100 MHz clock/Pentium III 750 MHz, video resolution 1024 x 768/100 Hz
monitor power via EUT

100 MHz clock/Pentium III 750 MHz, video resolution 1024 x 768/100 Hz
monitor power from peripheral device LISN

	<p>Fujitsu Siemens Computers Personal Computer Scenic DT6</p> <p>FCC Identifier: HSSSCENIC6511</p>	<p>Date: Dec. 17, 1999</p> <p>Page: 14/40</p>
---	--	---

Minebea PSU, model SPW1562-1:

100 MHz clock/Pentium III 750 MHz, video resolution 1024 x 768/100 Hz
monitor power via EUT

100 MHz clock/Pentium III 750 MHz, video resolution 1024 x 768/100 Hz
monitor power from peripheral device LISN



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6511

Date: Dec. 17, 1999

Page:
15/40

3.3 EUT Exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to typical use.

The used sequence is:

- scrolling "H" with applicable video mode (see 3.2)
- internal Floppy drive writes to the HD and reads back
- internal CD-ROM writes to the HD
- "H's" are sent to the printer ports
- data is sent to USB ports
- LAN data communication

3.4 Special Accessories

As shown in Figure 3.1, all interface cables used for compliance testing are shielded like normally supplied by the manufacturer. All cable connectors feature integral metal hoods for shielding.

3.5 Equipment Modifications

To achieve compliance to Class B levels, the following modifications were made during compliance testing:

no modifications

Applicant Signature _____ Date _____

Typed/Printed Name _____ Position _____

3.6 Configuration of Tested System

All necessary tests were carried out like figure 3.1. The system was used according to paragraph 1.1. During test for conducted emission the EUT was connected to a LISN. All peripherals were supplied by a second LISN. The equipment was configured according to ANSI C63.4-1992 Fig 11.




Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6511

Date: Dec. 17, 1999

Page:
17/40

Figure 3.1 Configuration of Tested System

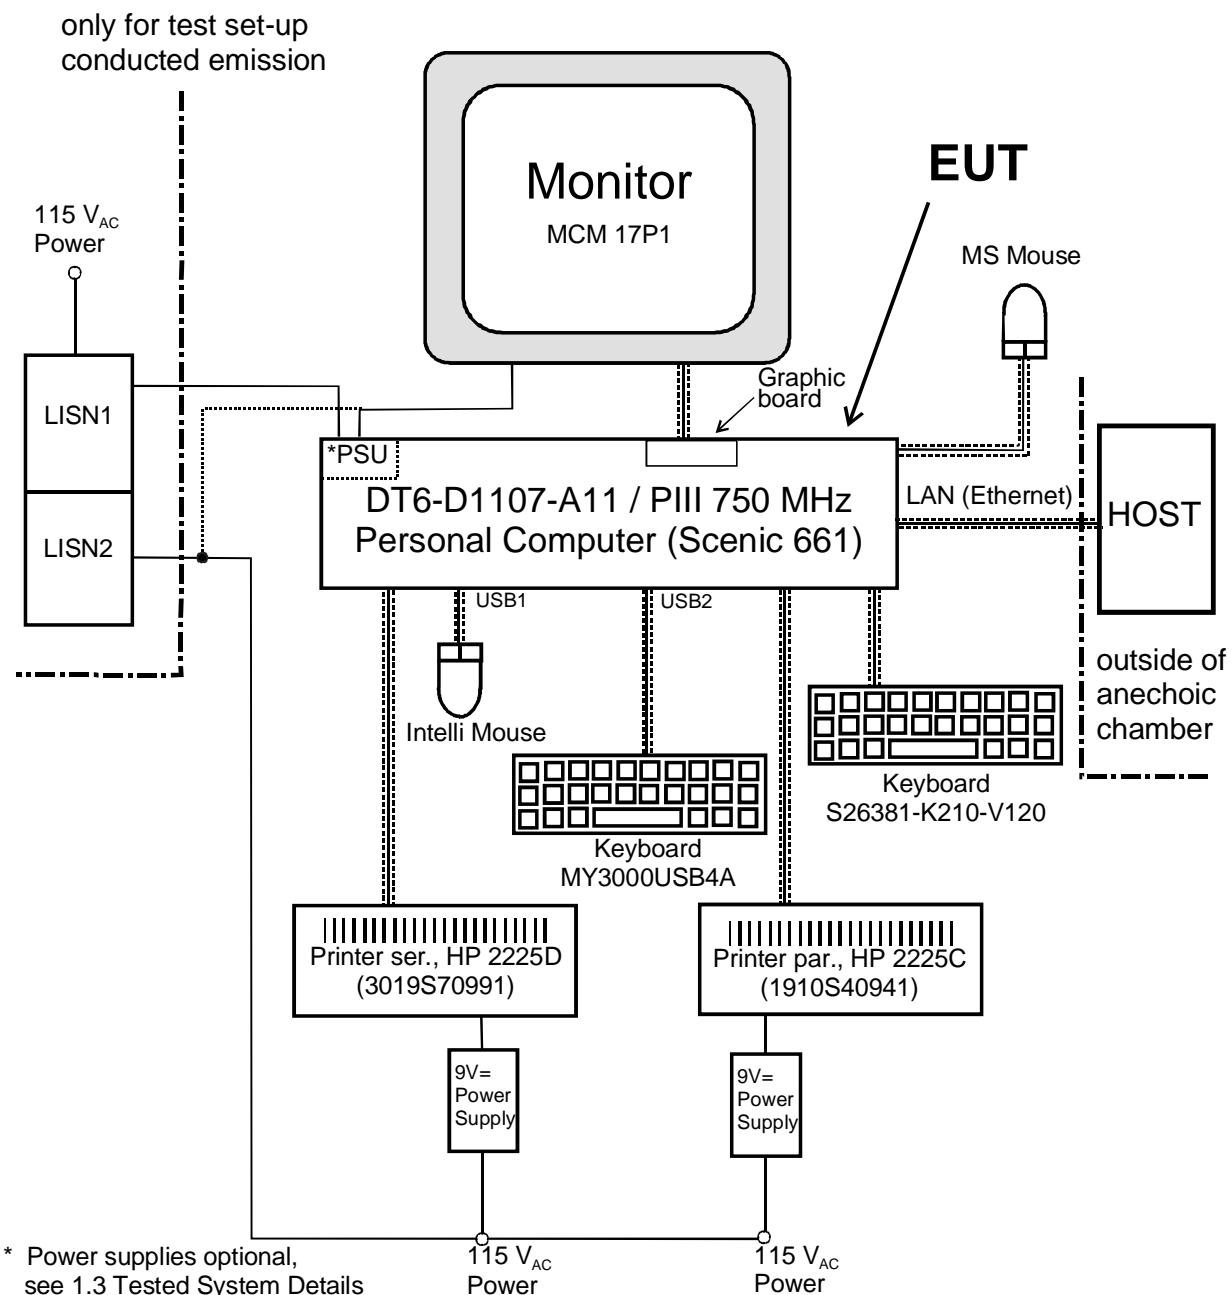

4 BLOCK DIAGRAM OF EUT

see fig 4.1 page 21

4.1 Block Diagram Description (see fig. 4.1)

The major parts of the system are (fig 4.1).

- System board
- Power supply
- Floppy disk drive
- Hard disk drive
- CD-ROM drive
- Peripheral connector area (Keyboard, Mouse, Ser. 1, Parallel Port, LAN and USB)

The detailed diagram of the system board is shown in fig 4.1

The personal computer works exactly like a traditional P.C..

4.2 Clockfrequencies of EUT

Clock synthesizer	14,318 MHz
Front side bus	66,6 / 100 MHz
Memory	66,6 / 100 MHz
PCI-bus	33,3 MHz
PIIX4 to IDE and USB	33,3 MHz
ISA Bus	8,2 MHz
I/O controller	14,3 MHz
USB	48 MHz
AGP bus	66,6 MHz

4.3 Theory of Operation


The compact desktop PC works exactly as a traditional PC.

The processors run internally between 233 and 750 MHz, the system clock is 66,6 MHz or 100 MHz and is multiplied by the processors internally by 3,5, 4,0, 4,5, 5,0, 5,5 6,0 or 7,5.

The highest possible frequencies and the corresponding processors are:

System clock	Processor	factor
66,6 MHz	233 MHz	3,5
66,6 MHz	266 MHz	4,0
66,6 MHz	300 MHz	4,5
66,6 MHz	333 MHz	5,0
66,6 MHz	366 MHz	5,5
100 MHz	350 MHz	3,5
100 MHz	400 MHz	4,0
100 MHz	450 MHz	4,5
100 MHz	500 MHz	5,0
100 MHz	600 MHz	6,0
100 MHz	750 MHz	7,5

Figure 4.1 Block Diagram of the EUT

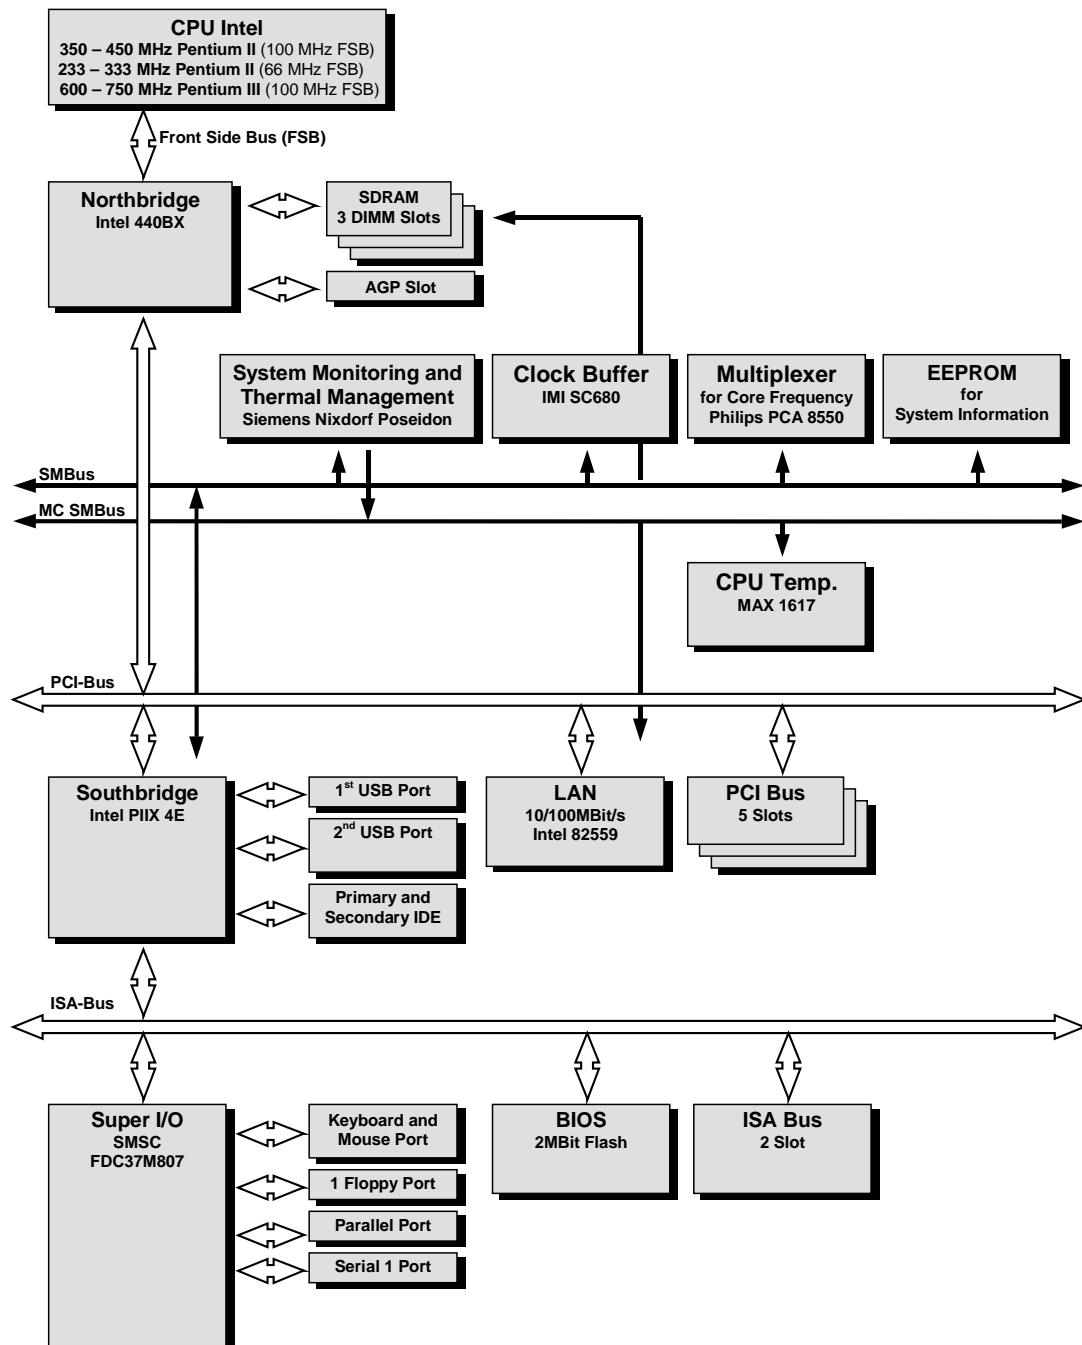

5 CONDUCTED EMISSION DATA

5.1 Test Procedure

The initial step in collecting conducted emission data is a Rohde & Schwarz Test Receiver (ESHS10). During first scan all data in peak mode is measured, then all significant peaks are explored either in quasi-peak mode or in average mode. In case of low noise (no peak value reaches the quasi peak limit), only average checks are done.

5.2 Measured Data

The conducted emission was measured the following way:

1. Peak noise on L
2. Peak noise on N

During the emission measurement the printers are supplied with power via a second LISN, the monitor was powered both, via the system unit or separately.

The worst case results of the measurement is given next:

ASTEC PSU:

- a) video resolution 1024 x 768/100 Hz, monitor power via EUT
- b) video resolution 1024 x 768/100 Hz, monitor power from peripheral device LISN

Judgement: Passed by

	Frequency [MHz]	Measured [dB(µV)]	Kind of value	Limit [dB(µV)]	Configuration
phase	0,162	48,70	QP	65,0	a

Judgement: Passed by

	Frequency [MHz]	Measured [dB(µV)]	Kind of value	Limit [dB(µV)]	Configuration
neutral	0,252	46,50	QP	62,0	a
neutral	0,312	49,30	QP	60,0	a
neutral	0,186	41,20	AV	54,0	a
neutral	0,252	40,30	AV	52,0	a
neutral	0,312	43,30	AV	50,0	a
neutral	0,186	47,80	QP	64,0	b
neutral	0,192	48,50	QP	64,0	b
neutral	0,312	50,00	QP	60,0	b
neutral	0,186	41,30	AV	54,0	b
neutral	0,252	40,40	AV	52,0	b
neutral	0,312	43,30	AV	50,0	b

AV: average

QP: quasi peak

Minebea PSU:

- a) video resolution 1024 x 768/100 Hz, monitor power via EUT
- b) video resolution 1024 x 768/100 Hz, monitor power from peripheral device LISN

Judgement: Passed by

	Frequency [MHz]	Measured [dB(µV)]	Kind of value	Limit [dB(µV)]	Configuration
neutral	0,162	48,80	QP	65,0	a
neutral	0,222	47,90	QP	63,0	a

Date: Dec. 17, 1999

FUJITSU COMPUTERS
SIEMENS

Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6511

Page:
23/40

	Frequency [MHz]	Measured [dB(µV)]	Kind of value	Limit [dB(µV)]	Configuration
phase	0,594	41,50	QP	56,0	a
neutral	0,222	45,80	AV	53,0	a
neutral	0,330	37,80	AV	50,0	a
phase	0,594	38,20	AV	46,0	a
phase	0,222	48,80	QP	63,0	b
phase	0,330	41,10	QP	60,0	b
phase	0,594	41,30	QP	56,0	b
phase	0,222	46,50	AV	53,0	b
phase	0,330	38,30	AV	50,0	b
phase	0,594	38,00	AV	46,0	b

AV: average

QP: quasi peak

Test Personnel:

Tester Signature: _____ Date: _____

Printed Name: A. Luck

FUJITSU COMPUTERS
SIEMENS

Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6511

Date: Dec. 17, 1999

Page:
24/40

Measurement Protocols: see attached file

ASTEC PSU:

100 MHz clock/Intel Pentium III 750 MHz
video resolution 1024 x 768/100 Hz
monitor power via EUT

100 MHz clock/Intel Pentium III 750 MHz
video resolution 1024 x 768/100 Hz
monitor power from peripheral device LISN

Minebea PSU:

100 MHz clock/Intel Pentium III 750 MHz
video resolution 1024 x 768/100 Hz
monitor power via EUT

100 MHz clock/Intel Pentium III 750 MHz
video resolution 1024 x 768/100 Hz
monitor power from peripheral device LISN

Date: Dec. 17, 1999



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6511

Page:
25/40

5.3 Referenced Rules Sections

N/A

5.4 Test Instrumentation Used, Conducted Measurement

Type	Manufacturer/ Model No.	Serial No.	Last Cal.	Cal. Interval
Receiver	ESHS10 Rohde&Schwarz	842884/011	May 99	12 months
LISN	ESH2-Z5 Rohde&Schwarz	871884/004	May 99	12 months
LISN	ESH3-Z5 Rohde&Schwarz	883650/027	May 99	12 months
Pulse limiter	ESH3-Z2 Rohde&Schwarz	---	May 99	12 months

6 RADIATED EMISSION DATA

6.1 Test Procedure

The radiated emission was measured in two parts:

1. in the frequency range from 30 MHz to 1000 MHz. The bandwidth of the EMI-receiver was set to 120 kHz and the detector was set to peak. During prescan all data in peak mode are accumulated automatically. At final measurement the detector was set to CISPR quasi peak and values above the acceptance line were verified automatically.
2. in the frequency range from 1000 MHz to 5000 MHz. The bandwidth of the EMI-receiver was set to 1 MHz and the detector was set to peak. During prescan all data in peak mode are accumulated automatically. At final measurement the detector was set to average and values above the acceptance line were verified automatically.

Both tests were performed in a semi anechoic chamber, measurements below 1000 MHz in a distance of 10 meters between antenna and EUT, above 1 GHz with a distance of 3 meters between antenna and EUT. During tests the EUT was turned 360° and the actual used receiving antenna was moved from 1 to 4 meters and the antenna polarisation was changed from horizontal to vertical for finding the maximum levels of emission.

For each range one antenna for the whole span was used

1. 30 MHz to 1000 MHz: log.-per antenna
2. 1000 MHz to 5000 MHz: rigid tensor antenna

After automatic tests during manual verification the cables and the equipment were placed and moved within the range of position in order to find the maximum of emission.

6.2 Measured Data

The EUT was measured with the Processor Pentium III 750 MHz in video mode 1024 x 768 / 100 Hz. The test results below reflect the worst case with:

ASTEC PSU:

- a) 100 MHz clock/Intel Pentium III 750 MHz,
video resolution 1024 x 768/100 Hz

Part 1: frequency range 30 MHz - 1000 MHz:

Judgement: Passed by

Frequency [MHz]	Level* [dB(µV/m)]	10 Meter Limit [dB(µV/m)]	Exceeding [dB]	Ant Pol	Height in [m]	Angle in deg
96.69000	23.70	30.000	-6.3	ver	1.60	270.000
132.96000	22.30	30.000	-7.7	hor	4.00	90.000
432.06000	30.50	37.000	-6.5	ver	1.00	180.000
562.50000	32.70	37.000	-4.3	ver	4.00	119.000
618.78000	33.40	37.000	-3.6	hor	1.60	150.000
893.52000	29.90	37.000	-7.1	hor	1.00	0.000

all levels are quasi-peak levels

*The correction factor is considered automatically by the test receiver.
A table of correction factors is listed in paragraph 7.4.

Part 2: frequency range 1 GHz - 5 GHz:

Judgement: Passed by

Frequency [MHz]	Level* [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]	Exceed Mark	Height [cm]	Azimuth [deg]	Ant Pol
1296.40000	30.60	53.9	23.3		100.00	330.00	ver
1496.20000	36.10	53.9	17.8		140.00	330.00	ver

Frequency [MHz]	Level* [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]	Exceed Mark	Height [cm]	Azimuth [deg]	Ant Pol
1795.30000	29.80	53.9	24.1		140.00	330.00	hor
2001.10000	29.60	53.9	24.3		100.00	29.00	ver
2993.50000	34.40	53.9	19.5		100.00	0.00	hor
4972.30000	33.20	53.9	20.7		140.00	90.00	ver

all levels are average levels

*The correction factor is considered automatically by the test receiver.
A table of correction factors is listed in paragraph 7.4.

Minebea PSU

b) 100 MHz clock/Intel Pentium III 750 MHz
video resolution 1024 x 768/100 Hz

Part 1: frequency range 30 MHz - 1000 MHz:

Judgement: Passed by

Frequency [MHz]	Level* [dB(µV/m)]	10 Meter Limit [dB(µV/m)]	Exceeding [dB]	Ant Pol	Height in [m]	Angle in deg
432.06000	31.70	37.000	-5.3	hor	2.20	330.000
562.53000	33.00	37.000	-4.0	ver	3.40	90.000
618.78000	32.00	37.000	-5.0	ver	2.80	330.000
675.03000	32.20	37.000	-4.8	hor	1.60	300.000
695.04000	32.50	37.000	-4.5	hor	1.00	180.000
731.28000	33.40	37.000	-3.6	hor	1.60	29.000

all levels are quasi-peak levels

*The correction factor is considered automatically by the test receiver.
A table of correction factors is listed in paragraph 7.4.

Part 2: frequency range 1 GHz - 5 GHz:

Judgement: Passed by

Frequency [MHz]	Level* [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]	Exceed Mark	Height [cm]	Azimuth [deg]	Ant Pol
1700.80000	31.90	53.9	22.0		100.00	330.00	ver
1893.40000	32.00	53.9	21.9		140.00	29.00	ver
2001.40000	30.70	53.9	23.2		100.00	29.00	ver
2128.00000	29.90	53.9	24.0		100.00	29.00	ver
2997.40000	30.60	53.9	23.3		220.00	29.00	hor
4891.30000	33.20	53.9	20.7		220.00	150.00	ver

all levels are average levels

*The correction factor is considered automatically by the test receiver.
A table of correction factors is listed in paragraph 7.4.

Test Personnel:

Tester Signature: _____ Date: _____

Printed Name: H. Zenkner

Measurement Protocols: see attached files

ASTEC PSU:

Frequency range 30 MHz - 1 GHz:
100 MHz clock/Intel Pentium III 750 MHz
video resolution 1024 x 768/100 Hz

Frequency range 1 GHz - 5 GHz:
100 MHz clock/Intel Pentium III 750 MHz
video resolution 1024 x 768/100 Hz

Minebea PSU:

Frequency range 30 MHz - 1 GHz:
100 MHz clock/Intel Pentium III 750 MHz
video resolution 1024 x 768/100 Hz

Frequency range 1 GHz - 5 GHz:
100 MHz clock/Intel Pentium III 750 MHz
video resolution 1024 x 768/100 Hz



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6511

Date: Dec. 17, 1999

Page:
31/40

6.3 Referenced Rules Sections

N/A

6.4 Test Instrumentation Used, Radiated Measurement

Type	Manufacturer/ Model No.	Serial No.	Last Cal.	Cal. Interval
Receiver	ESMI Rohde&Schwarz	840607/006	May 99	15 months
Antenna	CBL 6111 Chase	1345	May 99	12 months
Antenna	CBL 6112 Chase	2041	Aug 99	15 months
Active Ridged antenna	Tensor 4105 Rohde&Schwarz	2063	Dec 99	15 months

6.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor automatically to the measured value. The display of the Receiver shows the corrected value. The complete table of correction factors is given on next page. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

AF = Antenna Factor (incl. Preamplifier factor)

CF = Cable Attenuation Factor

Assume a receiver reading of 28,5 dB μ V is obtained. The Antenna Factor of 10,5 and a Cable Factor of 1,3 is added, giving a field strength of 40,3 dB μ V/m.

$$FS = 28,5 + 10,5 + 1,3 = 40,3 \text{ dB}\mu\text{V/m}$$

The 40,3 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

Level in μ V/m =

Common Antilogarithm $[(40,3 \text{ dB}\mu\text{V/m})/20] =$

103,5 μ V/m

6.6 Table of Correction Factors

Frequency range: 30 MHz to 1000 MHz (Antenna CBL6112)

Frequency [MHz]	Correction Bilog Antenna [dB]	Correction Cable [dB]	Correction Antenna + Cable [dB]
30,0	17,80	0,65	18,45
35,0	15,10	0,67	15,77
40,0	12,40	0,68	13,08
45,0	9,80	0,73	10,53
50,0	7,70	0,74	8,44
55,0	6,20	0,82	7,02
60,0	5,10	0,84	5,94
70,0	5,00	0,90	5,90
80,0	6,60	0,95	7,55
90,0	8,50	0,99	9,49
100,0	10,30	1,10	11,40
120,0	11,40	1,14	12,54
140,0	10,40	1,27	11,67
160,0	9,40	1,35	10,75
180,0	8,50	1,45	9,95
200,0	9,10	1,51	10,61
250,0	11,80	1,71	13,51
300,0	13,00	1,84	14,84
350,0	14,10	2,00	16,10
400,0	16,00	2,18	18,18
450,0	16,30	2,35	18,65
500,0	17,10	2,43	19,53

Frequency [MHz]	Correction Bilog Antenna [dB]	Correction Cable [dB]	Correction Antenna + Cable [dB]
550,0	18,80	2,62	21,41
600,0	18,60	2,73	21,33
650,0	19,00	2,88	21,88
700,0	19,10	2,91	22,01
750,0	19,80	3,01	22,81
800,0	19,80	3,21	23,01
850,0	20,40	3,32	23,72
900,0	20,50	3,40	23,90
950,0	20,80	3,49	24,29
1000,0	21,10	3,69	24,79



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6511

Date: Dec. 17, 1999

Page:
35/40

Frequency range: 1 GHz to 5 GHz

Frequency [GHz]	Correction Tensor Antenna with Pre- amplifier [dB]	Correction Cable [dB]	Correction Antenna + Cable [dB]
1,0	5,70	1,62	7,32
1,1	4,80	1,68	6,48
1,2	5,10	1,75	6,85
1,3	5,00	1,80	6,80
1,4	5,10	1,96	7,06
1,5	5,90	2,00	7,90
1,6	5,60	2,15	7,75
1,7	6,70	2,30	9,00
1,8	6,60	2,32	8,92
1,9	5,90	2,35	8,25
2,0	7,20	2,44	9,64
2,1	7,30	2,62	9,92
2,2	7,40	2,75	10,15
2,3	8,40	2,70	11,10
2,4	8,00	2,69	10,69
2,5	9,30	2,65	11,95
2,6	8,70	2,75	11,45
2,7	8,70	2,92	11,62
2,8	9,00	2,98	11,98
2,9	8,60	3,10	11,70
3,0	9,50	3,12	12,62
3,1	9,20	2,37	11,57
3,2	8,60	2,40	11,00

7 Conducted And Radiated Emission Measurement Photos: see attached files

7.1 Test set-up, conducted emission, front side view

7.2 Test set-up, conducted emission, rear side view

7.3 Test set-up, radiated emission, front side view

7.4 Test set-up, radiated emission, rear side view



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6511

Date: Dec. 17, 1999

Page:
37/40

8 External Photos of EUT

see original grant, date: Feb. 23, 1999



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6511

Date: Dec. 17, 1999

Page:
38/40

9 Internal Photos of EUT: see attached files

- 9.1 Inside view of EUT
- 9.2 Processor module, front side view
- 9.3 Processor module, rear side view

For further photos please refer to:

Original grant, dated: Feb. 23, 1999
First class II change, dated: Aug. 18, 1999



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6511

Date: Dec. 17, 1999

Page:
39/40

10 User Manual

see original grant, date: Feb. 23, 1999



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6511

Date: **Dec. 17, 1999**

Page:
40/40