

MEASUREMENT / TECHNICAL REPORT

Fujitsu Siemens Computers

Model: Personal Computer Scenic DT6

FCC ID: HSSSCENIC6621

May 16, 2000

<p>This report concerns: <input type="checkbox"/> Original grant <input checked="" type="checkbox"/> Class II change</p> <p>Equipment type: Personal Computer</p>		
<p>Request issue of grant: <input checked="" type="checkbox"/> Immediately upon completion of review <input type="checkbox"/> Defer grant per 47 CFR 0.457(d)(1)(ii) until _____ date _____. Company Name agrees to notify the Commission by _____ date _____ of the intended date of announcement of the product so that the grant can be issued on that date.</p>		
<p>Measurement procedure used: <input checked="" type="checkbox"/> ANSI C63.4-1992 <input type="checkbox"/> FCC/OET MP-4(1987) <input type="checkbox"/> other _____</p>		
<p>Limits on compliance with: CISPR 22 resp. FCC class B</p>		
<p>Application for Certification prepared by: Alexander Peschka Fujitsu Siemens Computers GmbH Buergermeister-Ulrich-Str. 100 86199 Augsburg Germany Tel.: +49 821 804-2502 Fax: +49 821 804 2675</p>		<p>Applicant for this device: Fujitsu Siemens Computers GmbH Buergermeister-Ulrich-Str. 100 86199 Augsburg Germany Tel.: +49 821 804-0</p>

	<p>Engineer: _____ Martin Heuser Fujitsu Siemens Computers Personal Computer Scenic DT6</p> <p>FCC Identifier: HSSSCENIC6621</p>	<p>Date: May 16, 2000</p> <p>Page: 1/42</p>
---	---	---

Table of Contents

1 GENERAL INFORMATION	4
1.1 Product Description	4 - 5
1.2 Related Submittal(s)/Grant(s)	6
1.3 Tested System Details	6 - 9
1.4 Test Methodology	10
1.5 Test Facility	10
1.6 Referenced Rules Sections	10
2 PRODUCT LABELING	11
Figure 2.1 FCC ID Label: see attached file	11
Figure 2.2 Location of Label on EUT: see attached file	11
3 SYSTEM TEST CONFIGURATION	12
3.1 Justification	12 - 13
3.2 Video Mode Justification	14 - 15
3.3 EUT Exercise Software	16
3.4 Special Accessories	16
3.5 Equipment Modifications	17
3.6 Configuration of Tested System	17
Figure 3.1 Configuration of Tested System	18
4 BLOCK DIAGRAM OF EQUIPMENT UNDER TEST	19
4.1 Block Diagram Description	19
4.2 Clockfrequencies of the EUT	19
4.3 Theory of Operation	20 - 21
Figure 4.1 Block Diagram	22
5 CONDUCTED EMISSION DATA	23
5.1 Test Procedure	23
5.2 Measured Data: see attached file	23 - 26
5.3 Referenced Rules	27
5.4 Test Instrumentation Used, Conducted Measurement	27

6 RADIATED EMISSION DATA	28
6.1 Test Procedure	28
6.2 Measured Data: see attached file	29 - 32
6.3 Reference Rules Sections	33
6.4 Test Instrumentation Used, Radiated Measurement	33
6.5 Field Strength Calculation	34
6.6 Table of Correction Factors	35 – 38
7 CONDUCTED AND RADIATED MEASUREMENT PHOTOS: see attached files	39
8 EXTERNAL PHOTOS OF EUT: see original grant, date Oct. 29, 1999	40
9 INTERNAL PHOTOS OF EUT: see attached files	41
10 USER MANUAL: see attached file	42

1 GENERAL INFORMATION

1.1 Product Description

The Fujitsu Siemens Computers Scenic DT6 is a compact desktop personal computer. The system board integrates the Pentium Processor, memory, and I/O-technologies. The main system unit is assembled with the Processor Intel Pentium III up to 866 MHz.

Description of the power supplies:

- Power supplies:

ASTEC, model	AA20650 S26113-E425-V30
--------------	----------------------------

Minebea, model	SPW1553-1 S26113-E425-V20
----------------	------------------------------

Features Overview:

CPU – Intel PGA370 / FCPGA

- 300 - 600 MHz Celeron (Coppermine-128k) with (66/100 MHz) FSB
- up to 866 MHz PIII with 100 / 133 MHz FSB
- Onboard voltage regulator

Main memory

- Two 3,3 V DIMM sockets for 16 MByte up to 512 MByte, support only unbuffered SDRAM DIMMs with 100 MHz (PC100)

Chips on board

- Intel 810e Chip Set
- Analog Devices AD 1881 Audio Codec
- Intel 82559 LAN Controller
- National PC87363 Super I/O



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6621

Date: May 16, 2000

Page:
4/42

2D/3D Graphics

- 24 Bit 230 MHz RAMDAC
- optional Display Cache
- Dynamic Video Memory (DVM)

AC'97

- Host based Audio with AC'97
- Mono Micro In, Stereo Line In, Stereo CD IN, Stereo Aux In, Game/MIDI Port
- Stereo Line Out (max. 2x0,5 W / 8 Ω)
- Sound via internal system speaker

Communication

- 2 USB ports with 12 MBit/s
- 2 External PS2 ports
- 1 External parallel port
- 1 External serial (COM1) port
- 1 Internal connector for chipcard reader or external serial (COM2) port via wire

LAN – Ethernet Controller

- Intel 82559 with 10/100 MBit/s
- WOL by interesting packets, link status change and Magic-Packet™
- InCom LAN boot and Intel LANdesk Service Agent (LSA) support
- Alert on LAN (AOL)

Storage Devices

- 2 IDE ports for up to 4 IDE devices Support enhanced busmaster ATA66
- One internal Floppy port for two Floppy and one Floppy-Tape drive Support up to 2,88 MByte Floppy

Form factor, slots compatible list

- Micro ATX
- 4 PCI slots
- Compatible to ACPI, APM, AGP, BBS, DMI, IAPC, OnNow, PC99, PCI, WfM

The personal computer is assembled by Fujitsu Siemens Computers GmbH,
Bürgermeister-Ulrich-Str. 100, 86199 Augsburg.



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6621

Date: May 16, 2000

Page:
5/42

1.2 Related Submittal Grant

N/A

1.3 Tested System Details

The FCC IDs for all equipment, plus description of all cables used in the tested system are:

Pos	Model Number (Serial Number)	FCC ID	Description	Cable Description (length in [cm])
1	Fujitsu Siemens Computers DT6-D1171 (Scenic xB-1171)	HSSSCENIC6621	Personal Computer EUT	unshielded power cord [292]
2	Fujitsu Siemens Computers MCM 17P1 YEDA175914	A3LCSE783	Monitor	unshielded power cord [175] shielded video cable [168]
3	Microsoft Mouse 2.1 A 1825831-00000	C3KKMP1	Mouse	shielded mouse cable [197]
4	Logitech M-UB48 LZA83300044	DZL211137	USB-Mouse	shielded mouse cable [197]



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6621

Date: **May 16, 2000**

Page:
6/42

Pos	Model Number (Serial Number)	FCC ID	Description	Cable Description (length in [cm])
5	Fujitsu Siemens Computers S26381-K240-V120 YBKB990330300550	HSS01TASTK240	Keyboard	shielded keyboard cable [143]
6	Cherry MY3000USB4A 000468K37	DOC	USB- Keyboard	shielded keyboard cable [143]
7	Hewlett Packard HP 2225C+ (3012S70819)	DSI6XU2225	Printer, parallel I/F	unshielded AC ca- ble [180], shielded centronics cable [190]
8	Hewlett Packard HP 2225D+ (2952S61299)	DSI6XU2225	Printer, serial I/F	unshielded power cord [185], shiel- ded serial cable [190]
8	Media Vision	N/A	Microphone	shielded cable [142]
9	Chairman Power Beat P-10	N/A	Loud- speaker	shielded cable [166 + 124]
10	Microsoft Side Winder 3D Pro 02100777	C3KMQ1	Joystick	shielded cable
11	Bay Networks HUB 100BaseT	N/A	HUB	



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6621

Date: May 16, 2000

Page:
7/42

Pos	Model Number (Serial Number)	FCC ID	Description	Cable Description (length in [cm])
12			Line IN	shielded cable, terminated [192]
	<u>Pos 1 contains:</u>			
a ₁	ASTEC (UK), AA20650 S26113-E425-V30	N/A	Power supply	N/A
a ₂	Minebea SPW1553-1 S26113-E425-V20 GS2	N/A	Power supply	N/A
b	Quantum Fireball QUM: FBCR43A S26361-H447-V100	N/A	Hard disk drive	N/A
c	LITE-ON LTN-382 S26361-H451-V500	DOC	CD-ROM drive	N/A
d	SONY MPF920-C S26361-H303-V500	N/A	Floppy disk drive	N/A
e	Fujitsu Siemens Computers S26361-D1171-A11	N/A	System board	N/A
f	Intel Pentium III 866 MHz	N/A	Processor module	N/A



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6621

Date: May 16, 2000

Page:
8/42

Pos	Model Number (Serial Number)	FCC ID	Description	Cable Description (length in [cm])
g	Hyundai HYM7V65801 PC100-322-620	N/A	SDRAM	N/A

Remark: position 1a₁ / 1a₂ optional



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6621

Date: May 16, 2000

Page:
9/42

1.4 Test Methodology

Both, conducted and radiated tests were performed according to the procedures in ANSI C63.4-1992. Radiated testing below 1 GHz was performed at an antenna to EUT distance of 10 meters above 1 GHz at an antenna to EUT distance of 3 meters. All radiated emission measurements were done in an anechoic chamber. Limits for radiated and conducted emission are in compliance with CISPR 22 resp FCC class B.

1.5 Test Facility

The test site is located at Fujitsu Siemens Computers GmbH, Bürgermeister-Ulrich-Str. 100, 86199 Augsburg, Germany. This site consist of a 10 m semi anechoic chamber for radiated emission testing and of two shielded cabinets for conducted emission testing. The 10 m semi anechoic chamber is conform with the NSA-limits described in CISPR22, CISPR16 and ANSI C63.4.1992. The site is registered by the German accreditation body DAR-Registration No. TTI-P-G114 and by the Federal Communications Commission on April 07, 2000, Registration Number 90935.

1.6 Referenced Rules Sections

N/A



Fujitsu Siemens Computers

Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6621

Date: May 16, 2000

Page:
10/42

2 PRODUCT LABELING

2.1 FCC ID Label: see attached file

2.2 Location of Label on EUT: see attached file



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6621

Date: **May 16, 2000**

Page:
11/42

3 SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a maximum fashion (as a customer can use it). Each type of external ports was connected with a peripheral unit (e.g. serial port connected to a serial printer, external keyboard port connected to a keyboard and so on). During radiated emission the monitor was powered via system unit, during conducted emission also the external monitor supply was tested.

The system clock is 133 MHz, the clock frequency was tested with the corresponding worst case processor:

133 MHz clock: Intel Pentium III 866 MHz

The system is provided with two kinds of power supplies:

- ASTEC, AA20650 FSC: S26113-E425-V30
- Minebea, SPW1553-1 FSC: S26113-E425-V20

According both worst case results concerning the test report of the original grant (dated: Oct. 29, 1999) and the first class II change (dated: Jan. 21, 2000) the following configuration has been tested:

Referring to radiated emission the following (worst case) results are applicable:

ASTEC PSU:

Frequency range 30 MHz - 1 GHz:

133 MHz clock/Pentium III 866 MHz, video resolution 1024 x 768/85 Hz

Frequency range 1 GHz - 5 GHz:

133 MHz clock/Pentium III 866 MHz, video resolution 1024 x 768/85 Hz

Minebea PSU:

Frequency range 30 MHz - 1 GHz:

133 MHz clock/Pentium III 866 MHz, video resolution 1024 x 768/85 Hz

Frequency range 1 GHz - 5 GHz:

133 MHz clock/Pentium III 866 MHz, video resolution 1024 x 768/85 Hz

Referring to conducted emission the following (worst case) results are applicable:

ASTEC PSU:

133 MHz clock/Pentium III 866 MHz, video resolution 1024 x 768/85 Hz
monitor power via EUT

133 MHz clock/Pentium III 866 MHz, video resolution 1024 x 768/85 Hz
monitor power from peripheral device LISN

Minebea PSU:

133 MHz clock/Pentium III 866 MHz, video resolution 1024 x 768/85 Hz
monitor power via EUT

133 MHz clock/Pentium III 866 MHz, video resolution 1024 x 768/85 Hz
monitor power from peripheral device LISN

Date: May 16, 2000



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6621

Page:
13/42

3.2 Video mode Justification

The system was tested in video graphic mode 1024 x 768, 85 Hz (worst case combination according the test results of the original grant (dated: Oct. 29, 1999) and the first class II change (dated: Jan. 21, 2000) has been tested:

The following data are applicable:

radiated emission:

ASTEC PSU:

Frequency range 30 MHz - 1 GHz:

133 MHz clock/Pentium III 866 MHz, video resolution 1024 x 768/85 Hz

Frequency range 1 GHz - 5 GHz:

133 MHz clock/Pentium III 866 MHz, video resolution 1024 x 768/85 Hz

Minebea PSU:

Frequency range 30 MHz - 1 GHz:

133 MHz clock/Pentium III 866 MHz, video resolution 1024 x 768/85 Hz

Frequency range 1 GHz - 5 GHz:

133 MHz clock/Pentium III 866 MHz, video resolution 1024 x 768/85 Hz

conducted emission:

ASTEC PSU:

133 MHz clock/Pentium III 866 MHz, video resolution 1024 x 768/85 Hz
monitor power via EUT

133 MHz clock/Pentium III 866 MHz, video resolution 1024 x 768/85 Hz
monitor power from peripheral device LISN

Minebea PSU:

133 MHz clock/Pentium III 866 MHz, video resolution 1024 x 768/85 Hz
monitor power via EUT

133 MHz clock/Pentium III 866 MHz, video resolution 1024 x 768/85 Hz
monitor power from peripheral device LISN



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6621

Date: May 16, 2000

Page:
15/42

3.3 EUT Exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to typical use.

The used sequence is:

- scrolling "H" with applicable video mode (see 3.2)
- internal Floppy drive writes to the HD and reads back
- internal CD-ROM writes to the HD
- "H's" are sent to the printer ports
- data is sent to USB ports
- LAN data communication

3.4 Special Accessories

As shown in Figure 3.1, all interface cables used for compliance testing are shielded like normally supplied by the manufacturer. All cable connectors feature integral metal hoods for shielding.

3.5 Equipment Modifications

To achieve compliance to Class B levels, the following modifications were made during compliance testing:

no modifications

Applicant Signature _____ Date _____

Typed/Printed Name _____ Position _____

3.6 Configuration of Tested System

All necessary tests were carried out like figure 3.1. The system was used according to paragraph 1.1. During test for conducted emission the EUT was connected to a LISN. All peripherals were supplied by a second LISN. The equipment was configured according to ANSI C63.4-1992 Fig 11.



Fujitsu Siemens Computers

Personal Computer Scenic DT6


FCC Identifier:
HSSSCENIC6621

Date: May 16, 2000

Page:
17/42

Figure 3.1 Configuration of Tested System

only for test set-up
conducted emission

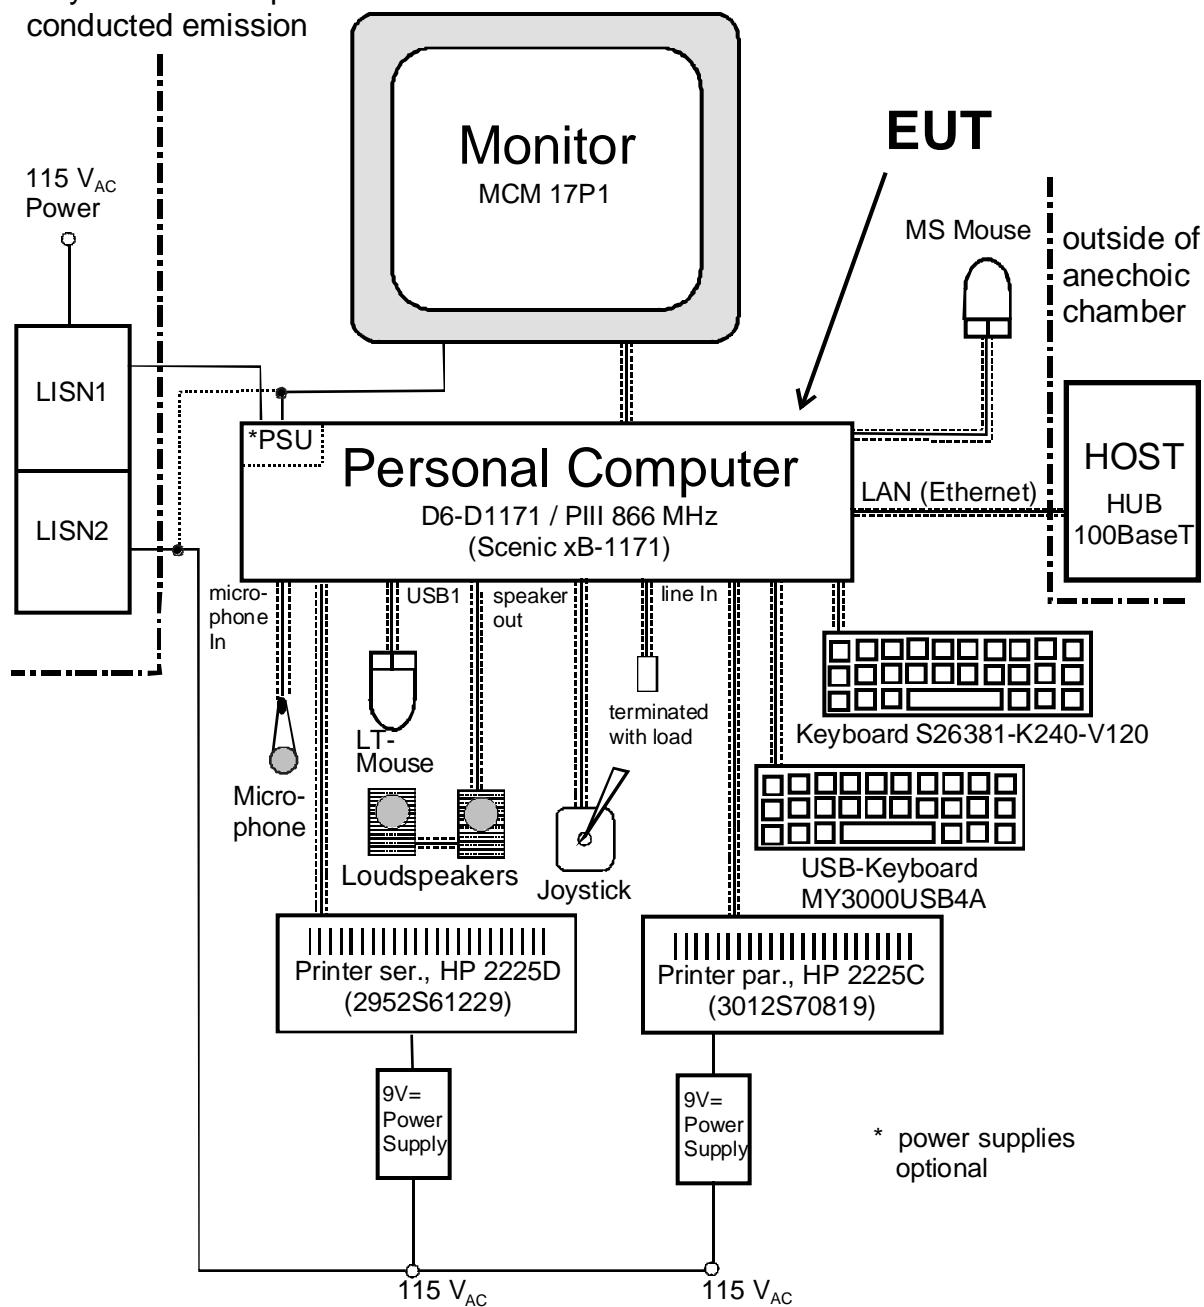

4 BLOCK DIAGRAM OF EUT

see fig 4.1 page 22

4.1 Block Diagram Description (see fig. 4.1)

The major parts of the system are (fig 4.1).

- System board
- Power supply
- Floppy disk drive
- Hard disk drive
- CD-ROM drive
- Peripheral connector area (keyboard, mouse, ser. 1, parallel port LAN, USB and audio)

The detailed diagram of the system board is shown in fig 4.1

The personal computer works exactly like a traditional P.C..

4.2 Clockfrequencies of EUT

VGA controller	48 MHz
Clock synthesizer	14.318 MHz
Front side bus	66.6/100/133 MHz
Memory	100 MHz
PCI-bus	33.3 MHz
PIIX4 to IDE and USB	33.3 MHz
I/O controller	48 MHz
USB	48 MHz
Display cache	133 MHz
Audio controller	24.576 MHz

4.3 Theory of Operation

The compact desktop PC works exactly as a traditional PC.

The processors run internally between 233 and 866 MHz, the system clock is 66.6 MHz, 100 MHz or 133 MHz and is multiplied by the processors internally by 3.5, 4.0, 4.5, 5.0, 5.5, 6.0, 6.5, 7.0, 7.5 or 8.0.

The highest possible frequencies and the corresponding processors are:

Processor	System clock	factor
233 MHz	66,6 MHz	3.5
266 MHz	66,6 MHz	4.0
300 MHz	66,6 MHz	4.5
333 MHz	66,6 MHz	5.0
366 MHz	66,6 MHz	5.5
350 MHz	100 MHz	3.5
400 MHz	100 MHz	4.0
450 MHz	100 MHz	4.5
500 MHz	100 MHz	5.0

Processor	System clock	factor
550 MHz	100 MHz	5.5
600 MHz	100 MHz	6.0
700 MHz	100 MHz	7.0
733 MHz	133 MHz	5.5
750 MHz	100 MHz	7.5
800 MHz	100 MHz	8.0
866 MHz	133 MHz	6.5




Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSCENIC6621

Date: May 16, 2000

Page:
21/42

4.1 Block Diagram of the EUT

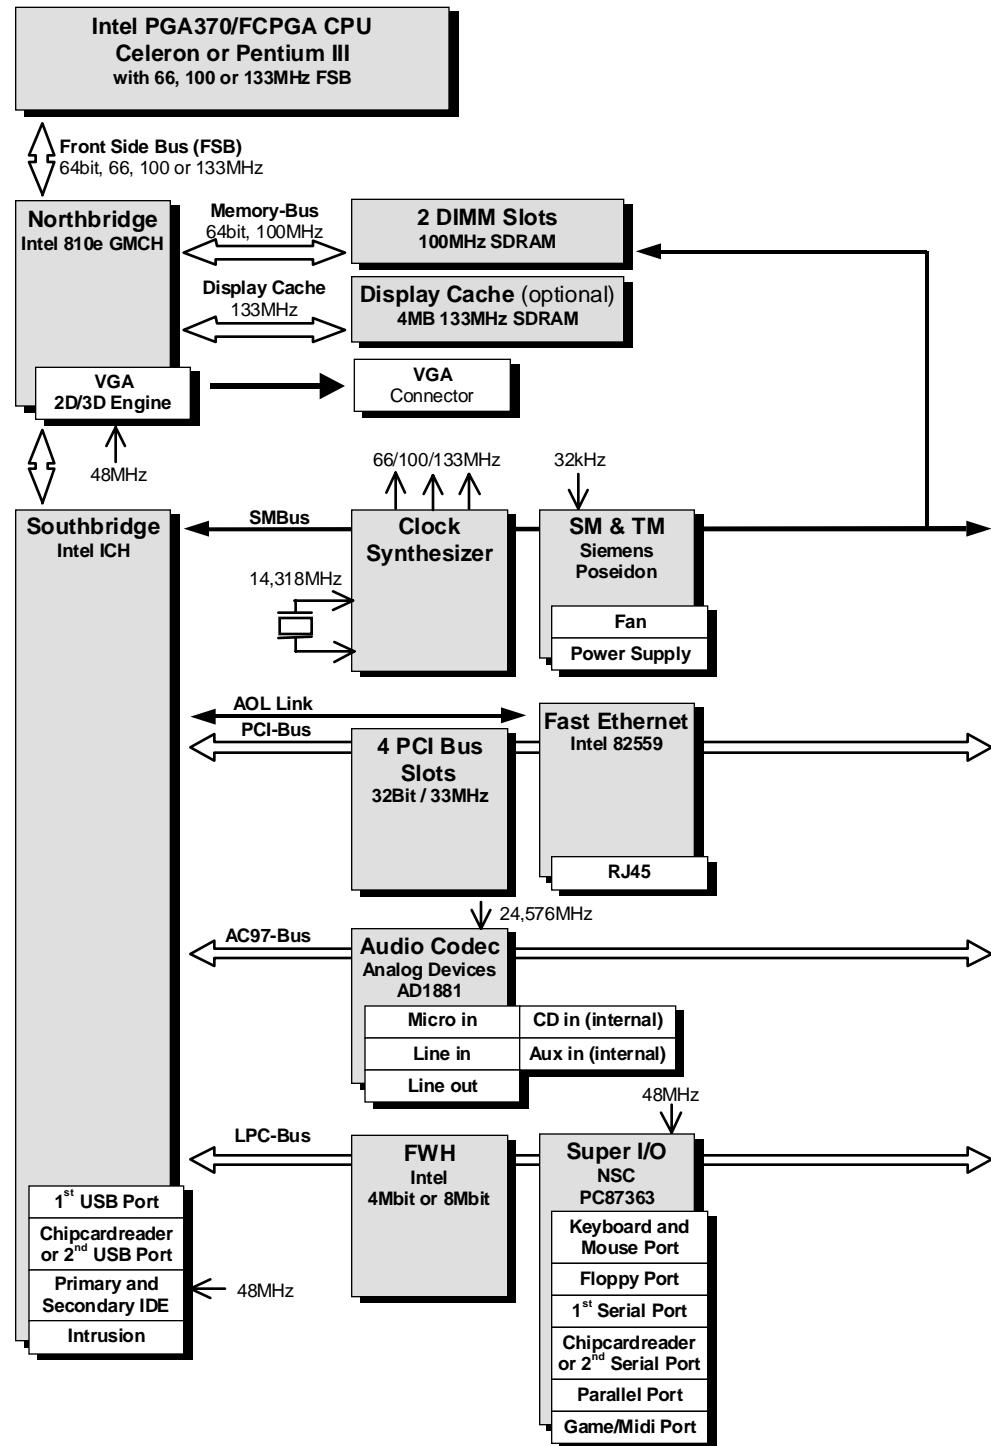

5 CONDUCTED EMISSION DATA

5.1 Test Procedure

The initial step in collecting conducted emission data is a Rohde & Schwarz Test Receiver (ESH3). During first scan all data in peak mode is measured, then all significant peaks are explored either in quasi-peak mode or in average mode. In case of low noise (no peak value reaches the quasi peak limit), only average checks are done.

5.2 Measured Data

The conducted emission was measured the following way:

1. Peak noise on L
2. Peak noise on N

During the emission measurement the printers are supplied with power via a second LISN, the monitor was powered both, via the system unit or separately.

The worst case results of the measurement is given next:

ASTEC PSU:

- a) video resolution 1024 x 768/85 Hz, monitor power via EUT
- b) video resolution 1024 x 768/85 Hz, monitor power from peripheral device LISN

Judgement: Passed by

	Frequency [MHz]	Measured [dB(µV)]	Kind of value	Limit [dB(µV)]	Configuration
neutral	0.180	48.80	QP	64.4	a

Judgement: Passed by

	Frequency [MHz]	Measured [dB(µV)]	Kind of value	Limit [dB(µV)]	Configuration
neutral	0.240	50.10	QP	62.0	a
phase	0.300	47.80	QP	60,2	a
neutral	0.180	47.00	AV	54.4	a
neutral	0.240	45.60	AV	52.0	a
neutral	0.300	45.30	AV	50.2	a
neutral	0.180	50.70	QP	64.4	b
neutral	0.240	52.50	QP	62.0	b
phase	0.300	48.60	QP	60.2	b
neutral	0.180	47.50	AV	54.4	b
neutral	0.240	46.80	AV	52.0	b
neutral	0.300	45.70	AV	50.2	b

AV: average

QP: quasi peak

Minebea PSU:

- a) video resolution 1024 x 768/85 Hz, monitor power via EUT
- b) video resolution 1024 x 768/85 Hz, monitor power from peripheral device LISN

Judgement: Passed by

	Frequency [MHz]	Measured [dB(µV)]	Kind of value	Limit [dB(µV)]	Configuration
phase	0.228	45.10	QP	62.5	a
phase	1.434	37.10	QP	56.0	a

Date: May 16, 2000

 FUJITSU
COMPUTERS
SIEMENS

Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6621

Page:
24/42

	Frequency [MHz]	Measured [dB(µV)]	Kind of value	Limit [dB(µV)]	Configuration
phase	1.536	36.90	QP	56.0	a
phase	0.234	45.20	AV	52.3	a
phase	1.434	37.00	AV	46.0	a
phase	1.536	36.10	QP	46.0	a
neutral	0.228	44.90	QP	62.5	b
neutral	1.434	36.60	QP	56.0	b
phase	125360	36.90	QP	56.0	b
neutral	0.234	45.30	AV	52.3	b
phase	1.434	36.70	AV	46.0	b
phaseal	1.536	36.10	AV	46.0	b

AV: average

QP: quasi peak

Test Personnel:

Tester Signature: _____ Date: _____

Printed Name: M. Rothauscher

Test Personnel:

Tester Signature: _____ Date: _____

Printed Name: M. Bindl



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6621

Date: May 16, 2000

Page:
25/42

Measurement Protocols: see attached file

ASTEC PSU:

133 MHz clock/Intel Pentium III 866 MHz
video resolution 1024 x 768/85 Hz
monitor power via EUT

133 MHz clock/Intel Pentium III 866 MHz
video resolution 1024 x 768/85 Hz
monitor power from peripheral device LISN

Minebea PSU:

133 MHz clock/Intel Pentium III 866 MHz
video resolution 1024 x 768/85 Hz
monitor power via EUT

133 MHz clock/Intel Pentium III 866 MHz
video resolution 1024 x 768/85 Hz
monitor power from peripheral device LISN



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6621

Date: May 16, 2000

Page:
26/42

5.3 Referenced Rules Sections

N/A

5.4 Test Instrumentation Used, Conducted Measurement

Type	Manufacturer/ Model No.	Serial No.	Last Cal.	Cal. Interval
Receiver	ESHS10 Rohde&Schwarz	842884/011	May 99	12 months
Receiver	ESH3 Rohde&Schwarz	879599/019	May 99	12 months
LISN	ESH2-Z5 Rohde&Schwarz	871884/004	May 99	12 months
LISN	ESH3-Z5 Rohde&Schwarz	883650/027	May 99	12 months
Pulse limiter	ESH3-Z2 Rohde&Schwarz	---	May 99	12 months



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6621

Date: May 16, 2000

Page:
27/42

6 RADIATED EMISSION DATA

6.1 Test Procedure

The radiated emission was measured in two parts:

1. in the frequency range from 30 MHz to 1000 MHz. The bandwidth of the EMI-receiver was set to 120 kHz and the detector was set to peak. During prescan all data in peak mode are accumulated automatically. At final measurement the detector was set to CISPR quasi peak and values above the acceptance line were verified automatically.
2. in the frequency range from 1000 MHz to 5000 MHz. The bandwidth of the EMI-receiver was set to 1 MHz and the detector was set to peak. During prescan all data in peak mode are accumulated automatically. At final measurement the detector was set to average and values above the acceptance line were verified automatically.

Both tests were performed in a semi anechoic chamber, measurements below 1000 MHz in a distance of 10 meters between antenna and EUT, above 1 GHz with a distance of 3 meters between antenna and EUT. During tests the EUT was turned 360° and the actual used receiving antenna was moved from 1 to 4 meters and the antenna polarisation was changed from horizontal to vertical for finding the maximum levels of emission.

For each range one antenna for the whole span was used

1. 30 MHz to 1000 MHz: log.-per antenna
2. 1000 MHz to 5000 MHz: rigid tensor antenna

After automatic tests during manual verification the cables and the equipment were placed and moved within the range of position in order to find the maximum of emission.

6.2 Measured Data

The EUT was measured with the Processor Intel Pentium III 866 MHz in video mode 1024 x 768, 85 Hz. The test results below reflect the worst case with:

ASTEC PSU:

- a) 133 MHz clock/Intel Pentium III 866 MHz,
video resolution 1024 x 768/85 Hz

Part 1: frequency range 30 MHz - 1000 MHz:

Judgement: Passed by

Frequency [MHz]	Level* [dB(µV/m)]	10 Meter Limit [dB(µV/m)]	Exceeding [dB]	Ant Pol	Height in [m]	Angle in deg
217.38000	21.10	30.000	-8.9	ver	1.00	180.000
233.25000	29.30	37.000	-7.7	ver	1.00	119.000
298.14000	29.90	37.000	-7.1	ver	1.00	59.000
433.23000	29.50	37.000	-7.5	hor	2.20	210.000
499.86000	29.50	37.000	-7.5	hor	1.60	300.000
934.50000	28.20	37.000	-8.8	hor	1.00	210.000

all levels are quasi-peak levels

*The correction factor is considered automatically by the test receiver. A table of correction factors is listed in paragraph 7.4.

Part 2: frequency range 1 GHz - 5 GHz:

Judgement: Passed by

Frequency [MHz]	Level* [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]	Exceed Mark	Height [cm]	Azimuth [deg]	Ant Pol
1099.60000	30.90	53.9	23.0		100.00	150.00	hor
1391.20000	33.60	53.9	20.3		100.00	29.00	hor

Frequency [MHz]	Level* [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]	Exceed Mark	Height [cm]	Azimuth [deg]	Ant Pol
1689.10000	30.70	53.9	23.2		120.00	29.00	ver
1722.10000	35.00	53.9	18.9		120.00	29.00	ver
4129.90000	32.10	53.9	21.8		240.00	180.00	hor
4956.40000	34.20	53.9	19.7		100.00	150.00	hor

all levels are average levels

*The correction factor is considered automatically by the test receiver. A table of correction factors is listed in paragraph 7.4.

Minebea PSU

b) 133 MHz clock/Intel Pentium III 866 MHz
video resolution 1024 x 768/85 Hz

Part 1: frequency range 30 MHz - 1000 MHz:

Judgement: Passed by

Frequency [MHz]	Level* [dB(µV/m)]	10 Meter Limit [dB(µV/m)]	Exceeding [dB]	Ant Pol	Height in [m]	Angle in deg
99.96000	22.70	30.000	-7.3	ver	1.00	210.000
113.43000	24.40	30.000	-5.6	ver	1.00	180.000
166.62000	23.20	30.000	-6.8	hor	4.00	29.000
299.97000	31.40	37.000	-5.6	ver	1.00	300.000
496.80000	33.80	37.000	-3.2	hor	1.60	330.000
933.09000	33.40	37.000	-3.6	ver	1.60	180.000

all levels are quasi-peak levels

*The correction factor is considered automatically by the test receiver. A table of correction factors is listed in paragraph 7.4.



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6621

Date: May 16, 2000

Page:
30/42

Part 2: frequency range 1 GHz - 5 GHz:

Judgement: Passed by

Frequency [MHz]	Level* [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]	Exceed Mark	Height [cm]	Azimuth [deg]	Ant Pol
1060.00000	31.70	53.9	22.2		160.00	59.00	ver
1099.60000	29.10	53.9	24.8		100.00	210.00	hor
1294.60000	28.70	53.9	25.2		180.00	59.00	hor
1590.10000	29.80	53.9	24.1		100.00	0.00	ver
1689.10000	30.70	53.9	23.2		120.00	330.00	ver
4006.60000	31.80	53.9	22.1		280.00	180.00	ver

all levels are average levels

*The correction factor is considered automatically by the test receiver. A table of correction factors is listed in paragraph 7.4.

Test Personnel:

Tester Signature: _____ Date: _____

Printed Name: M. Heuser

Test Personnel:

Tester Signature: _____ Date: _____

Printed Name: M. Rothauscher

Measurement Protocols: see attached files

ASTEC PSU:

Frequency range 30 MHz - 1 GHz:
133 MHz clock/Intel Pentium III 866 MHz
video resolution 1024 x 768/85 Hz

Frequency range 1 GHz - 5 GHz:
133 MHz clock/Intel Pentium III 866 MHz
video resolution 1024 x 768/85 Hz

Minebea PSU:

Frequency range 30 MHz - 1 GHz:
133 MHz clock/Intel Pentium III 866 MHz
video resolution 1024 x 768/85 Hz

Frequency range 1 GHz - 5 GHz:
133 MHz clock/Intel Pentium III 866 MHz
video resolution 1024 x 768/85 Hz



Fujitsu Siemens Computers

Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6621

Date: May 16, 2000

Page:
32/42

6.3 Referenced Rules Sections

N/A

6.4 Test Instrumentation Used, Radiated Measurement

Type	Manufacturer/ Model No.	Serial No.	Last Cal.	Cal. Interval
Receiver	ESMI Rohde&Schwarz	840607/006	May 99	15 months
Antenna	CBL 6111 Chase	1345	May 99	12 months
Antenna	CBL 6112 Chase	2041	Aug 99	15 months
Active Ridged antenna	Tensor 4105 Rohde&Schwarz	2063	Dec 99	15 months



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6621

Date: May 16, 2000

Page:
33/42

6.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor automatically to the measured value. The display of the Receiver shows the corrected value. The complete table of correction factors is given on next page. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

AF = Antenna Factor (incl. Preamplifier factor)

CF = Cable Attenuation Factor

Assume a receiver reading of 28,5 dB μ V is obtained. The Antenna Factor of 10,5 and a Cable Factor of 1,3 is added, giving a field strength of 40,3 dB μ V/m.

$$FS = 28,5 + 10,5 + 1,3 = 40,3 \text{ dB}\mu\text{V/m}$$

The 40,3 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

Level in μ V/m =

Common Antilogarithm $[(40,3 \text{ dB}\mu\text{V/m})/20] =$

103,5 μ V/m

6.6 Table of Correction Factors

Frequency range: 30 MHz to 1000 MHz (Antenna CBL6112)

Frequency [MHz]	Correction Bilog Antenna [dB]	Correction Cable [dB]	Correction Antenna + Cable [dB]
30.0	17.80	0.65	18.45
35.0	15.10	0.67	15.77
40.0	12.40	0.68	13.08
45.0	9.80	0.73	10.53
50.0	7.70	0.74	8.44
55.0	6.20	0.82	7.02
60.0	5.10	0.84	5.94
70.0	5.00	0.90	5.,90
80.0	6.60	0.95	7.55
90.0	8.50	0.99	9.49
100.0	10.30	1.10	11.40
120.0	11.40	1.14	12.54
140.0	10.40	1.27	11.67
160.0	9.40	1.35	10.75
180.0	8.50	1.45	9.95
200.0	9.10	1.51	10.61
250.0	11.80	1.71	13.51
300.0	13.00	1.84	14.84
350.0	14.10	2.00	16.10
400.0	16.00	2.18	18.18
450.0	16.30	2.35	18.65
500.0	17.10	2.43	19.53

Frequency [MHz]	Correction Bilog Antenna [dB]	Correction Cable [dB]	Correction Antenna + Cable [dB]
550.0	18.80	2.62	21.41
600.0	18.60	2.73	21.33
650.0	19.00	2.88	21.88
700.0	19.10	2.91	22.01
750.0	19.80	3.01	22.81
800.0	19.80	3.21	23.01
850.0	20.40	3.32	23.72
900.0	20.50	3.40	23.90
950.0	20.80	3.49	24.29
1000.0	21.10	3.69	24.79



Fujitsu Siemens Computers

Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6621

Date: May 16, 2000

Page:
36/42

Frequency range: 1 GHz to 5 GHz

Frequency [GHz]	Correction Tensor Antenna with Pre- amplifier [dB]	Correction Cable [dB]	Correction Antenna + Cable [dB]
1.0	5.70	1.62	7.32
1.1	4.80	1.68	6.48
1.2	5.10	1.75	6.85
1.3	5.00	1.80	6.80
1.4	5.10	1.96	7.06
1.5	5.90	2.00	7.90
1.6	5.60	2.15	7.75
1.7	6.70	2.30	9.00
1.8	6.60	2.32	8.92
1.9	5.90	2.35	8.25
2.0	7.20	2.44	9.64
2.1	7.30	2.62	9.92
2.2	7.40	2.75	10.15
2.3	8.40	2.70	11.10
2.4	8.00	2.69	10.69
2.5	9.30	2.65	11.95
2.6	8.70	2.75	11.45
2.7	8.70	2.92	11.62
2.8	9.00	2.98	11.98
2.9	8.60	3.10	11.70
3.0	9.50	3.12	12.62
3.1	9.20	2.37	11.57
3.2	8.60	2.40	11.00



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6621

Date: May 16, 2000

Page:
37/42

Frequency [GHz]	Correction Tensor Antenna with Pre- amplifier [dB]	Correction Cable [dB]	Correction Antenna + Cable [dB]
3.3	8.70	2.42	11.12
3.4	9.70	2.43	12.13
3.5	9.70	2.46	12.16
3.6	10.40	2.43	12.83
3.7	10.80	2.45	13.25
3.8	11.50	2.47	13.97
3.9	11.90	2.49	14.39
4.0	10.90	2.46	13.36
4.1	10.10	2.48	12.58
4.2	8.80	2.49	11.29
4.3	8.70	2.51	11.21
4.4	8.50	2.53	11.03
4.5	8.70	2.54	11.24
4.6	9.50	2.57	12.07
4.7	10.10	2.57	12.67
4.8	11.10	2.59	13.69
4.9	11.50	2.60	14.10
5.0	11.60	2.62	14.22

7 Conducted And Radiated Emission Measurement Photos: see attached files

7.1 Test set-up, conducted emission, front side view

7.2 Test set-up, conducted emission, rear side view

7.3 Test set-up, radiated emission, front side view

7.4 Test set-up, radiated emission, rear side view



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6621

Date: **May 16, 2000**

Page:
39/42

8 External Photos of EUT

see original grant, date: Oct. 29, 1999



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6621

Date: **May 16, 2000**

Page:
40/42

9 Internal Photos of EUT: see attached files

- 9.1 Inside view of EUT
- 9.2 Processor, top side view
- 9.3 Processor, rear side view



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6621

Date: **May 16, 2000**

Page:
41/42

10 User Manual: see attached file



Fujitsu Siemens Computers
Personal Computer Scenic DT6

FCC Identifier:
HSSSCENIC6621

Date: **May 16, 2000**

Page:
42/42