

**Conducted noise according to:
EN 55022 class B**

EUT: DT6-D1171 / PIII 866 MHz (Scenic xB-1171)
Manufacturer: Fujitsu Siemens Computers
Operating Condition: scroll "H"; 1024x768/85 Hz; HD/CD/Peripheral-Test
Test Site: Fujitsu Siemens Augsburg (shielded room #2)
Operator: M. Rothtaucher
Configuration: full configuration; PSU: Astec E425
Comment: Mains: 115 V_{AC}; Monitor power via EUT
Start of Test: 08.05.00 / 13:06:17

SCAN TABLE: "Volt_015-30fin"

Unit: dB μ V

Detector: Mode:

Curve 1: MaxPeak MaxHold
Curve 2: Average MaxHold


Subrange 1:

Start Frequency: 150.0 kHz Step Size: 6.0 kHz
Stop Frequency: 30.0 MHz
Measure Time: 10.0 ms
IF Bandwidth: 10 kHz

Receiver: ESH3 Transducer: ESH3-Z5
Signal Path: None System Transducer: None
Meas. Mode: Lin Add. Transd. 1: ESH3-Z2
Tracking Gen.: Off Add. Transd. 2: None
Input: -- Add. Transd. 3: None

Preamplifier: -- Demodulation: A3
RF Att.: 0 dB Volume: --
Ref. Level: -- Squelch: --
Min. RF Att.: -- Option: None
IF Att.: LowDistortion
Autorange: On

Curve 1: On Repetition: Single
Curve 2: On Stop Mark: Off
Stop Message: Off
Stop Message:

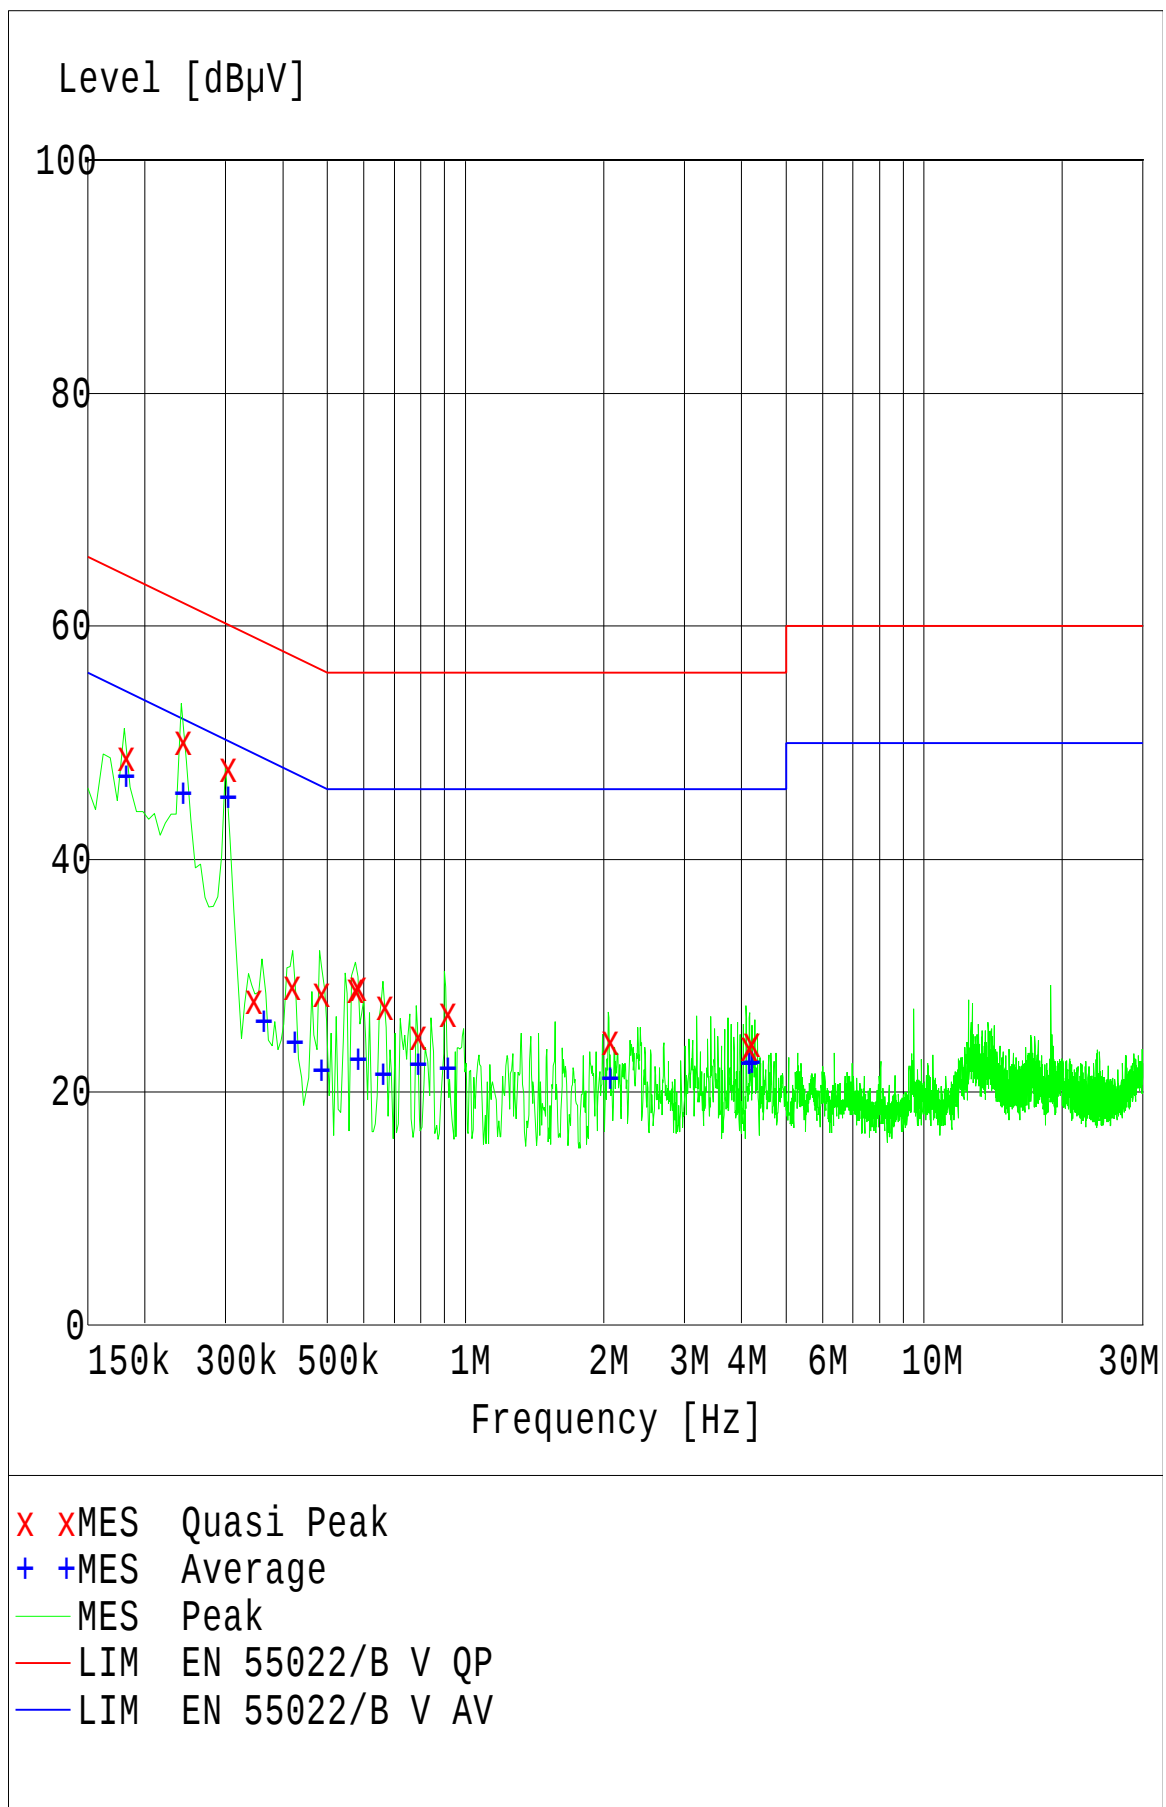

MEASUREMENT RESULT: "Quasi Peak"

08.05.00 13:30

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.180000	48.80	10.0	64.4	15.6	N	GND
0.240000	50.10	10.0	62.0	11.9	N	GND
0.300000	47.80	10.0	60.2	12.4	N	GND
0.342000	27.90	10.0	59.1	31.2	N	GND
0.414000	29.10	10.0	57.5	28.4	N	GND
0.480000	28.50	10.0	56.3	27.8	L1	GND
0.570000	28.80	10.0	56.0	27.2	N	GND
0.576000	29.00	10.0	56.0	27.0	N	GND
0.660000	27.30	10.0	56.0	28.7	L1	GND
0.780000	24.80	10.0	56.0	31.2	L1	GND
0.906000	26.70	10.0	56.0	29.3	L1	GND
2.046000	24.40	10.0	56.0	31.6	L1	GND
4.098000	23.80	10.0	56.0	32.2	L1	GND
4.158000	24.10	10.0	56.0	31.9	L1	GND

MEASUREMENT RESULT: "Average"

08.05.00 13:30

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.180000	47.00	10.0	54.4	7.4	N	GND
0.240000	45.60	10.0	52.0	6.4	N	GND
0.300000	45.30	10.0	50.2	4.9	N	GND
0.360000	26.00	10.0	48.7	22.7	N	GND
0.420000	24.20	10.0	47.4	23.2	L1	GND
0.480000	21.80	10.0	46.3	24.5	L1	GND
0.576000	22.70	10.0	46.0	23.3	L1	GND
0.654000	21.50	10.0	46.0	24.5	L1	GND
0.780000	22.30	10.0	46.0	23.7	L1	GND
0.906000	22.00	10.0	46.0	24.0	L1	GND
2.046000	21.10	10.0	46.0	24.9	L1	GND
4.098000	22.40	10.0	46.0	23.6	L1	GND
4.158000	22.50	10.0	46.0	23.5	L1	GND

**Conducted noise according to:
EN 55022 class B**

EUT: DT6-D1171 / PIII 866 MHz (Scenic xB-1171)
Manufacturer: Fujitsu Siemens Computers
Operating Condition: scroll "H"; 1024x768/85 Hz; HD/CD/Peripheral-Test
Test Site: Fujitsu Siemens Augsburg (shielded room #2)
Operator: M. Rothtaucher
Configuration: full configuration; PSU: Astec E425
Comment: Mains: 115 V_{AC}; Monitor power from peripheral device
LISN
Start of Test: 08.05.00 / 12:36:19

SCAN TABLE: "Volt_015-30fin"

Unit: dB μ V

Detector: Mode:

Curve 1: MaxPeak MaxHold
Curve 2: Average MaxHold


Subrange 1:

Start Frequency: 150.0 kHz Step Size: 6.0 kHz
Stop Frequency: 30.0 MHz
Measure Time: 10.0 ms
IF Bandwidth: 10 kHz

Receiver: ESH3 Transducer: ESH3-Z5
Signal Path: None System Transducer: None
Meas. Mode: Lin Add. Transd. 1: ESH3-Z2
Tracking Gen.: Off Add. Transd. 2: None
Input: -- Add. Transd. 3: None

Preamplifier: -- Demodulation: A3
RF Att.: 0 dB Volume: --
Ref. Level: -- Squelch: --
Min. RF Att.: -- Option: None
IF Att.: LowDistortion
Autorange: On

Curve 1: On Repetition: Single
Curve 2: On Stop Mark: Off
Stop Message: Off
Stop Message:

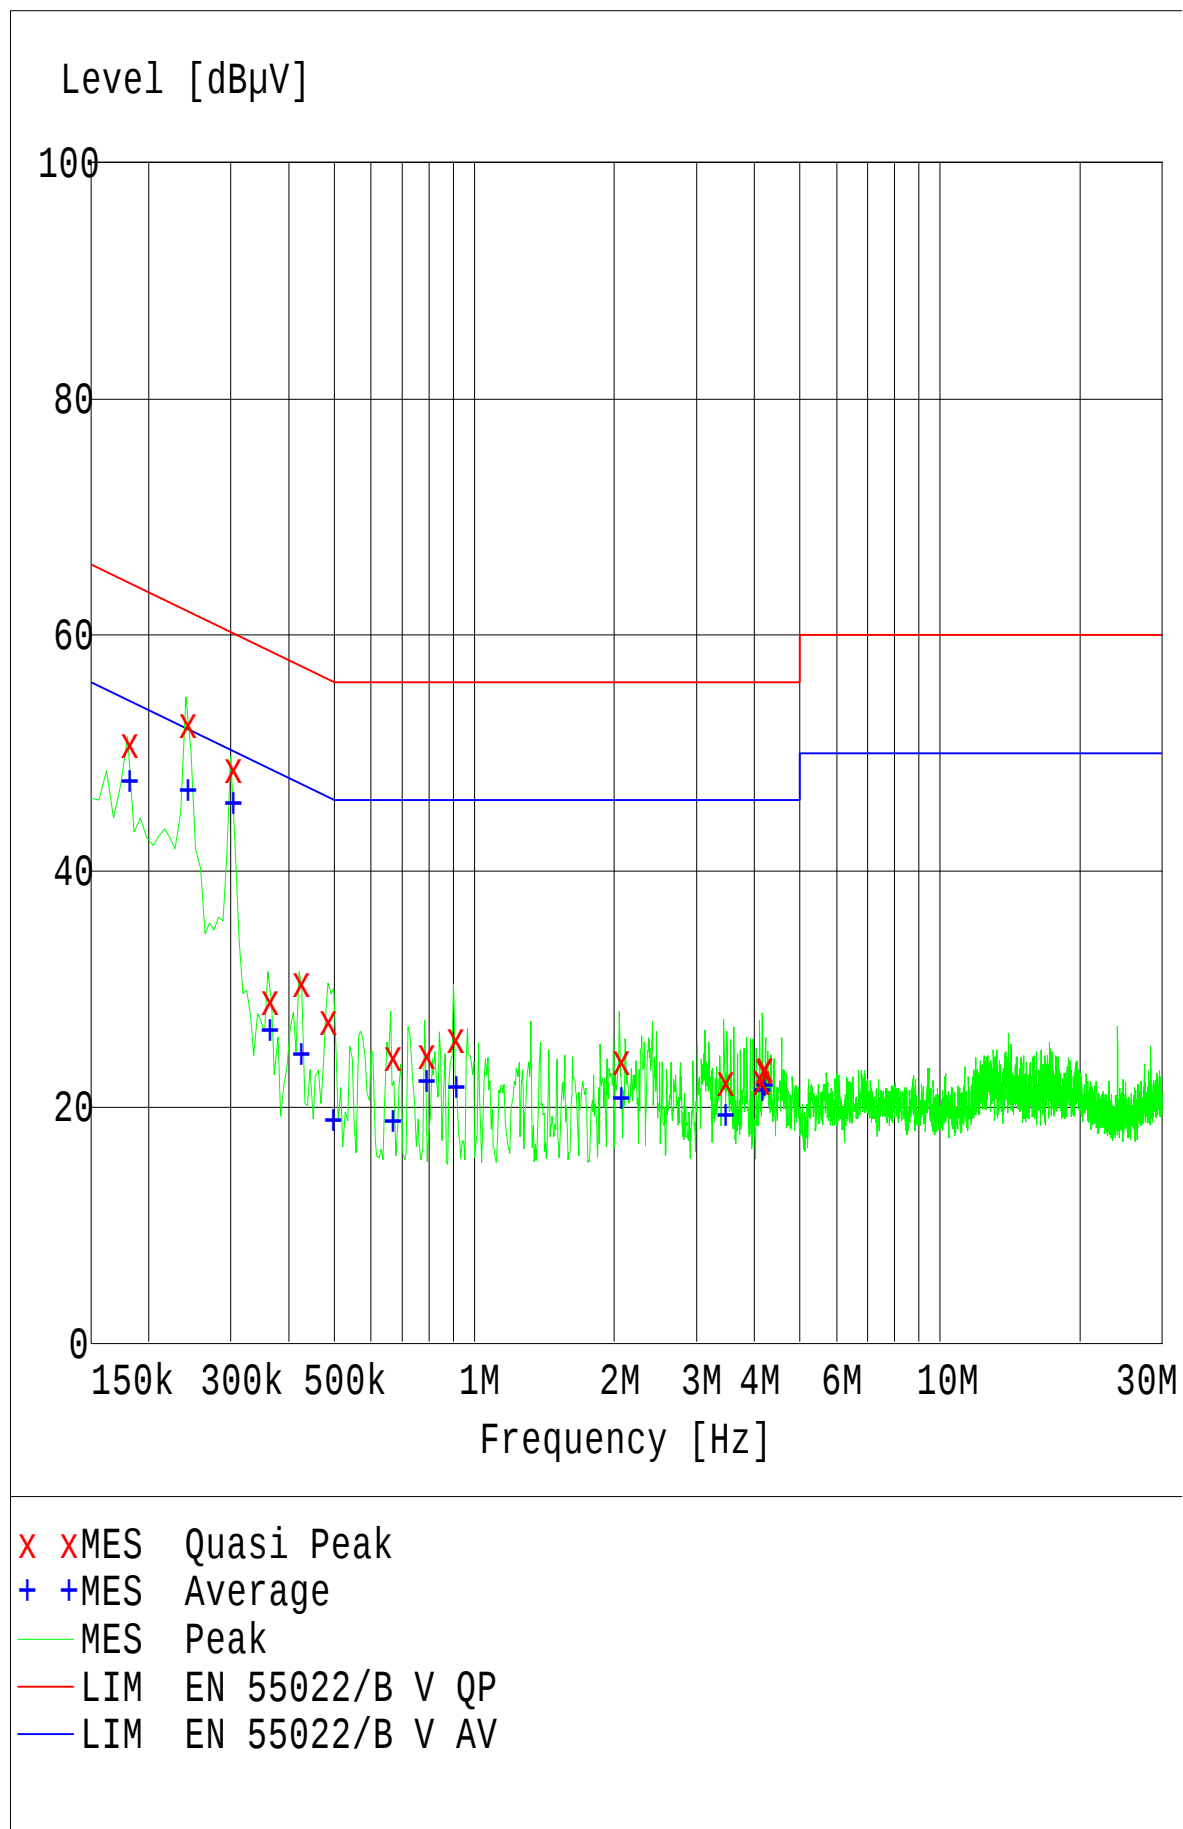

MEASUREMENT RESULT: "Quasi Peak"

08.05.00 13:01

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.180000	50.70	10.0	64.4	13.7	N	GND
0.240000	52.50	10.0	62.0	9.5	N	GND
0.300000	48.60	10.0	60.2	11.6	N	GND
0.360000	29.00	10.0	58.7	29.7	N	GND
0.420000	30.60	10.0	57.4	26.8	L1	GND
0.480000	27.30	10.0	56.3	29.0	L1	GND
0.660000	24.30	10.0	56.0	31.7	L1	GND
0.780000	24.50	10.0	56.0	31.5	L1	GND
0.900000	25.80	10.0	56.0	30.2	L1	GND
2.046000	24.00	10.0	56.0	32.0	L1	GND
3.432000	22.10	10.0	56.0	33.9	L1	GND
4.092000	22.30	10.0	56.0	33.7	L1	GND
4.152000	23.10	10.0	56.0	32.9	L1	GND
4.158000	23.40	10.0	56.0	32.6	L1	GND

MEASUREMENT RESULT: "Average"

08.05.00 13:01

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.180000	47.50	10.0	54.4	6.9	N	GND
0.240000	46.80	10.0	52.0	5.2	N	GND
0.300000	45.70	10.0	50.2	4.5	N	GND
0.360000	26.50	10.0	48.7	22.2	N	GND
0.420000	24.50	10.0	47.4	22.9	L1	GND
0.492000	18.90	10.0	46.1	27.2	L1	GND
0.660000	18.80	10.0	46.0	27.2	L1	GND
0.780000	22.10	10.0	46.0	23.9	L1	GND
0.906000	21.70	10.0	46.0	24.3	L1	GND
2.046000	20.70	10.0	46.0	25.3	N	GND
3.432000	19.30	10.0	46.0	26.7	L1	GND
4.098000	21.40	10.0	46.0	24.6	L1	GND
4.158000	21.90	10.0	46.0	24.1	L1	GND

**Conducted noise according to:
EN 55022 class B**

EUT: DT6-D1171 / PIII 866 MHz (Scenic xB-1171)
Manufacturer: Fujitsu Siemens Computers
Operating Condition: scroll "H"; 1024x768/85 Hz; HD/CD/Peripheral-Test
Test Site: Fujitsu Siemens Augsburg (shielded room #2)
Operator: M. Bindl
Configuration: full configuration; PSU: Minebea E425
Comment: Mains: 115 V_{AC}; Monitor power via EUT
Start of Test: 04.05.00 / 13:48:31

SCAN TABLE: "Volt_015-30fin"

Unit: dB μ V

Detector: Mode:

Curve 1: MaxPeak MaxHold
Curve 2: Average MaxHold


Subrange 1:

Start Frequency: 150.0 kHz Step Size: 6.0 kHz
Stop Frequency: 30.0 MHz
Measure Time: 10.0 ms
IF Bandwidth: 10 kHz

Receiver: ESH3 Transducer: ESH3-Z5
Signal Path: None System Transducer: None
Meas. Mode: Lin Add. Transd. 1: ESH3-Z2
Tracking Gen.: Off Add. Transd. 2: None
Input: -- Add. Transd. 3: None

Preamplifier: -- Demodulation: A3
RF Att.: 0 dB Volume: --
Ref. Level: -- Squelch: --
Min. RF Att.: -- Option: None
IF Att.: LowDistortion
Autorange: On

Curve 1: On Repetition: Single
Curve 2: On Stop Mark: Off
Stop Message: Off
Stop Message:

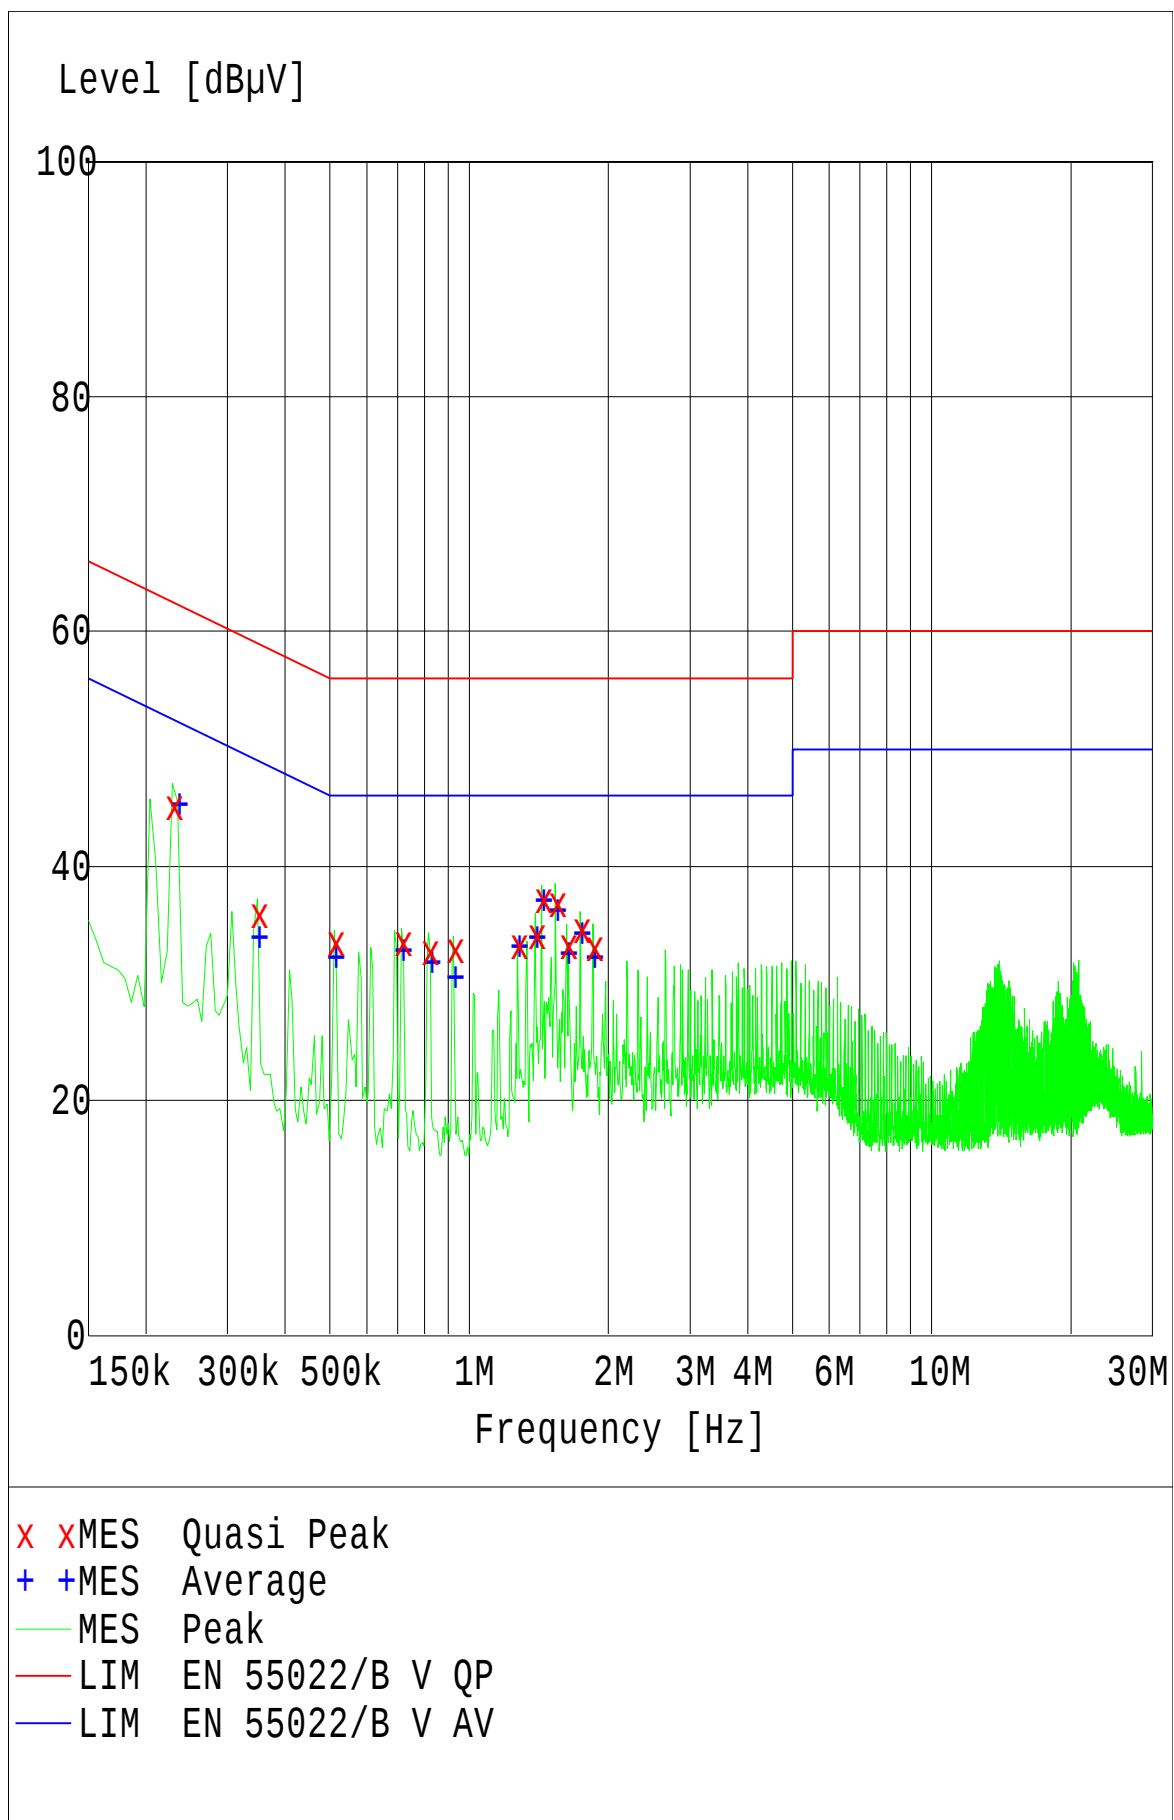

MEASUREMENT RESULT: "Quasi Peak"

04.05.00 14:14

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.228000	45.10	10.0	62.5	17.4	L1	GND
0.348000	35.90	10.0	59.0	23.1	N	GND
0.510000	33.50	10.0	56.0	22.5	N	GND
0.714000	33.50	10.0	56.0	22.5	N	GND
0.816000	32.70	10.0	56.0	23.2	N	GND
0.924000	32.90	10.0	56.0	23.1	N	GND
1.272000	33.30	10.0	56.0	22.7	L1	GND
1.386000	34.10	10.0	56.0	21.9	L1	GND
1.434000	37.10	10.0	56.0	18.9	L1	GND
1.536000	36.90	10.0	56.0	19.1	L1	GND
1.620000	33.20	10.0	56.0	22.7	L1	GND
1.734000	34.60	10.0	56.0	21.4	N	GND
1.848000	33.00	10.0	56.0	23.0	N	GND

MEASUREMENT RESULT: "Average"

04.05.00 14:14

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.234000	45.20	10.0	52.3	7.1	L1	GND
0.348000	33.90	10.0	49.0	15.1	L1	GND
0.510000	32.10	10.0	46.0	13.9	L1	GND
0.714000	32.70	10.0	46.0	13.2	N	GND
0.822000	31.70	10.0	46.0	14.3	L1	GND
0.924000	30.40	10.0	46.0	15.6	N	GND
1.272000	33.00	10.0	46.0	13.0	L1	GND
1.386000	33.80	10.0	46.0	12.2	L1	GND
1.434000	37.00	10.0	46.0	9.0	L1	GND
1.536000	36.10	10.0	46.0	9.8	L1	GND
1.620000	32.40	10.0	46.0	13.6	L1	GND
1.734000	34.20	10.0	46.0	11.7	N	GND
1.848000	32.20	10.0	46.0	13.7	N	GND

**Conducted noise according to:
EN 55022 class B**

EUT: DT6-D1171 / PIII 866 MHz (Scenic xB-1171)
 Manufacturer: Fujitsu Siemens Computers
 Operating Condition: scroll "H"; 1024x768/85 Hz; HD/CD/Peripheral-Test
 Test Site: Fujitsu Siemens Augsburg (shielded room #2)
 Operator: M. Bindl
 Configuration: full configuration; PSU: Minebea E425
 Comment: Mains: 115 V_{AC}; Monitor power from peripheral device
 LISN
 Start of Test: 04.05.00 / 13:08:27

SCAN TABLE: "Volt_015-30fin"

Unit: dB μ V

Detector: Mode:

Curve 1: MaxPeak MaxHold
 Curve 2: Average MaxHold


Subrange 1:

Start Frequency: 150.0 kHz Step Size: 6.0 kHz
 Stop Frequency: 30.0 MHz
 Measure Time: 10.0 ms
 IF Bandwidth: 10 kHz

Receiver: ESH3 Transducer: ESH3-Z5
 Signal Path: None System Transducer: None
 Meas. Mode: Lin Add. Transd. 1: ESH3-Z2
 Tracking Gen.: Off Add. Transd. 2: None
 Input: -- Add. Transd. 3: None

Preamplifier: -- Demodulation: A3
 RF Att.: 0 dB Volume: --
 Ref. Level: -- Squelch: --
 Min. RF Att.: -- Option: None
 IF Att.: LowDistortion
 Autorange: On

Curve 1: On Repetition: Single
 Curve 2: On Stop Mark: Off
 Stop Message: Off
 Stop Message:

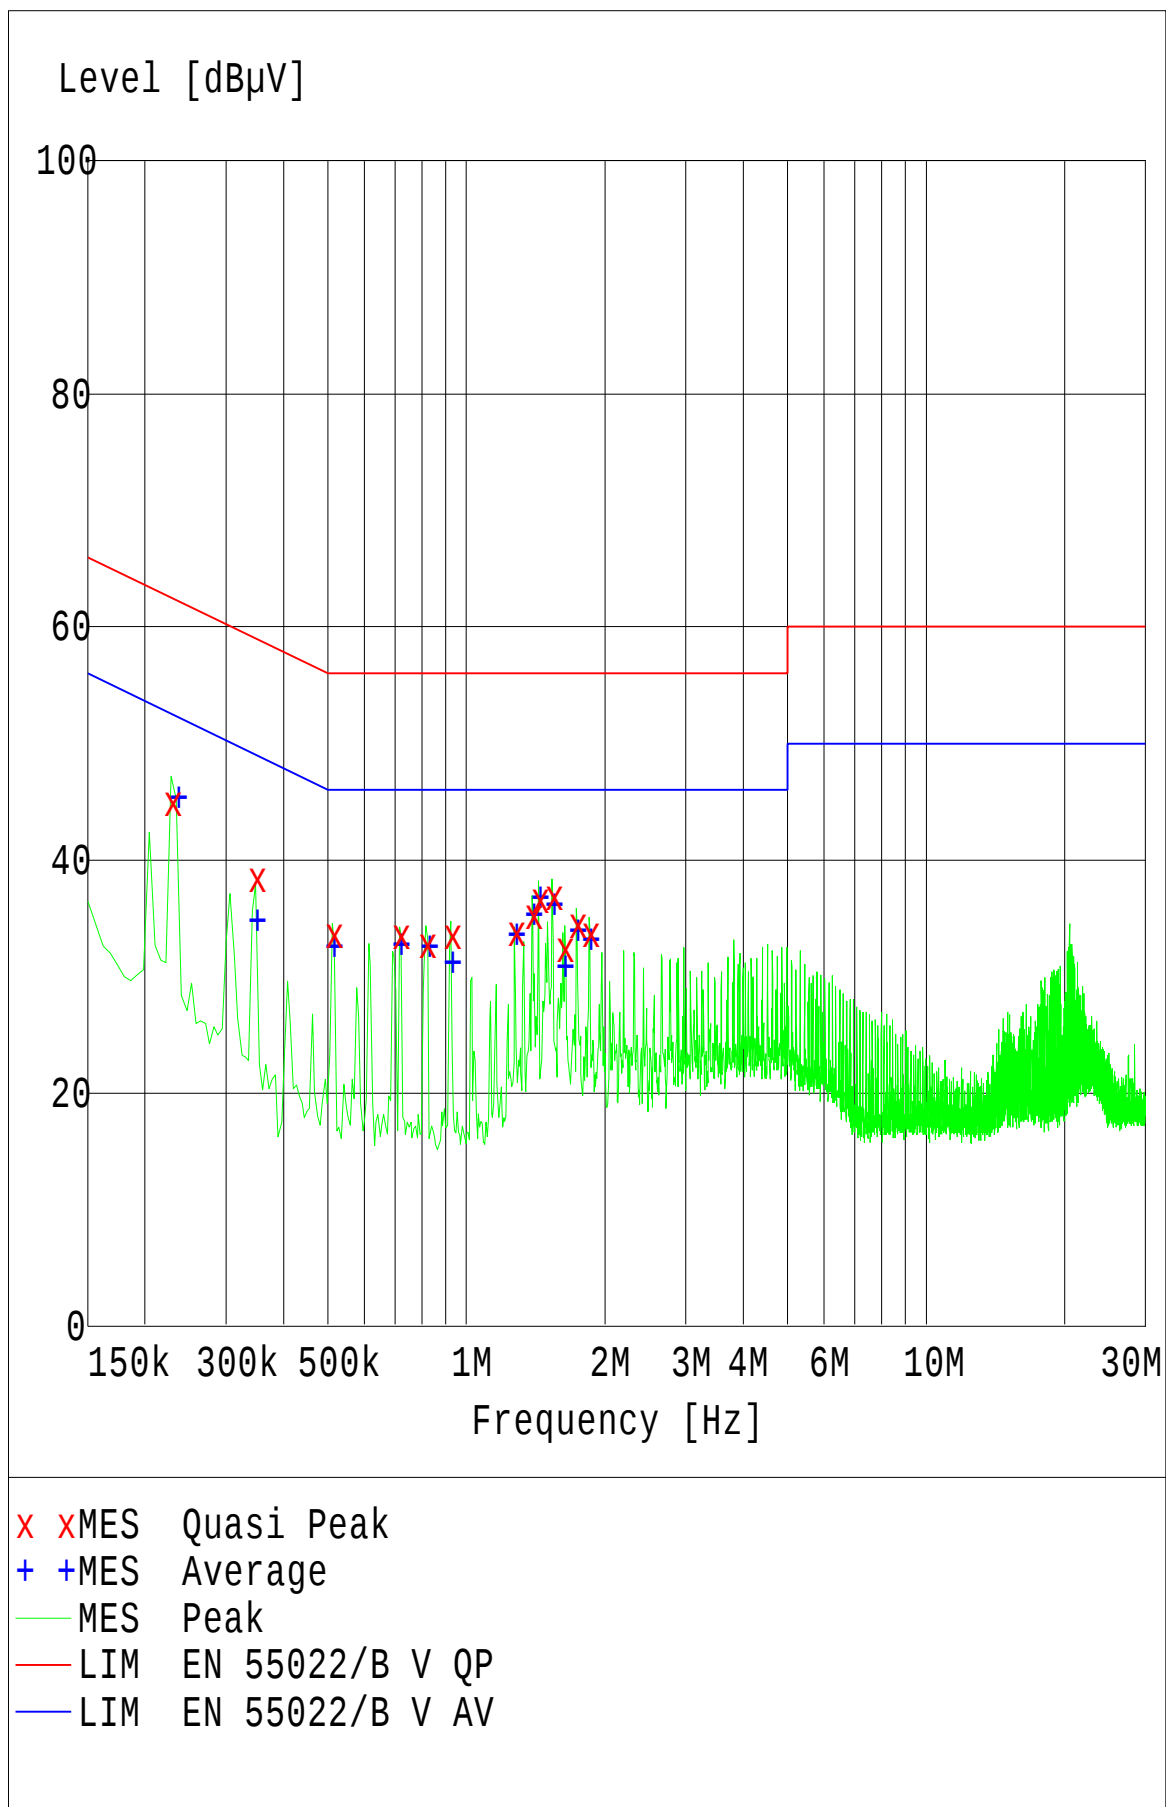

MEASUREMENT RESULT: "Quasi Peak"

04.05.00 13:37

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.228000	44.90	10.0	62.5	17.6	N	GND
0.348000	38.40	10.0	59.0	20.6	N	GND
0.510000	33.60	10.0	56.0	22.4	N	GND
0.714000	33.50	10.0	56.0	22.5	N	GND
0.816000	32.80	10.0	56.0	23.2	N	GND
0.924000	33.50	10.0	56.0	22.5	N	GND
1.272000	33.80	10.0	56.0	22.2	L1	GND
1.386000	35.30	10.0	56.0	20.7	L1	GND
1.434000	36.60	10.0	56.0	19.4	N	GND
1.536000	36.90	10.0	56.0	19.1	L1	GND
1.620000	32.40	10.0	56.0	23.6	L1	GND
1.734000	34.50	10.0	56.0	21.5	N	GND
1.848000	33.70	10.0	56.0	22.2	N	GND

MEASUREMENT RESULT: "Average"

04.05.00 13:37

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.234000	45.30	10.0	52.3	7.0	N	GND
0.348000	34.80	10.0	49.0	14.2	N	GND
0.510000	32.50	10.0	46.0	13.5	N	GND
0.714000	32.70	10.0	46.0	13.2	N	GND
0.822000	32.50	10.0	46.0	13.5	N	GND
0.924000	31.10	10.0	46.0	14.9	N	GND
1.272000	33.50	10.0	46.0	12.5	L1	GND
1.386000	35.20	10.0	46.0	10.7	L1	GND
1.434000	36.70	10.0	46.0	9.2	L1	GND
1.536000	36.10	10.0	46.0	9.8	L1	GND
1.620000	30.80	10.0	46.0	15.2	L1	GND
1.734000	33.90	10.0	46.0	12.1	N	GND
1.848000	33.10	10.0	46.0	12.9	N	GND

**Radiated emission according to:
to EN55022 class B**

EUT: DT6-D1171 / PIII 866 MHz (Scenic xB-1171)
 Manufacturer: Fujitsu Siemens Computers
 Operating Condition: Scroll "H" 1024x768/85 Hz; HD/CD/Peripheral-Test
 Test Site: Fujitsu Siemens Augsburg (10 m Semi Anechoic Chamber)
 Operator: M. Rothtaucher
 Configuration: Full configuration
 Comment: PSU: Astec E425
 Start of Test: 05.05.00 / 13:02:26

SCAN TABLE: "10m/30-1000"

Short Description: 10m Field Strength
 Unit: dBµV/m

Detector: Mode:

Curve 1: MaxPeak ClearWrite


Subrange 1:

Start Frequency: 30.0 MHz Step Size: 30.0 kHz
 Stop Frequency: 1.0 GHz
 Measure Time: 10.0 ms
 IF Bandwidth: 120 kHz

Receiver: ESXI Transducer: CBL6112 cal. 8/99
 Signal Path: 2DC-CP1X1 System Transducer: RFin2-CP1/X1
 Meas. Mode: Lin Add. Transd. 1: cable30-1000
 Tracking Gen.: Off Add. Transd. 2: None
 Input: 2DC Add. Transd. 3: None

Preamplifier: 10 dB Demodulation: AM
 RF Att.: Coupled Volume: 70 %
 Ref. Level: -60.0 dBm Squelch: --
 Min. RF Att.: 0 dB Option: None
 IF Att.: --
 Autorange: On

Curve 1: On Repetition: Single
 Stop Mark: Off
 Stop Message: Off
 Stop Message:

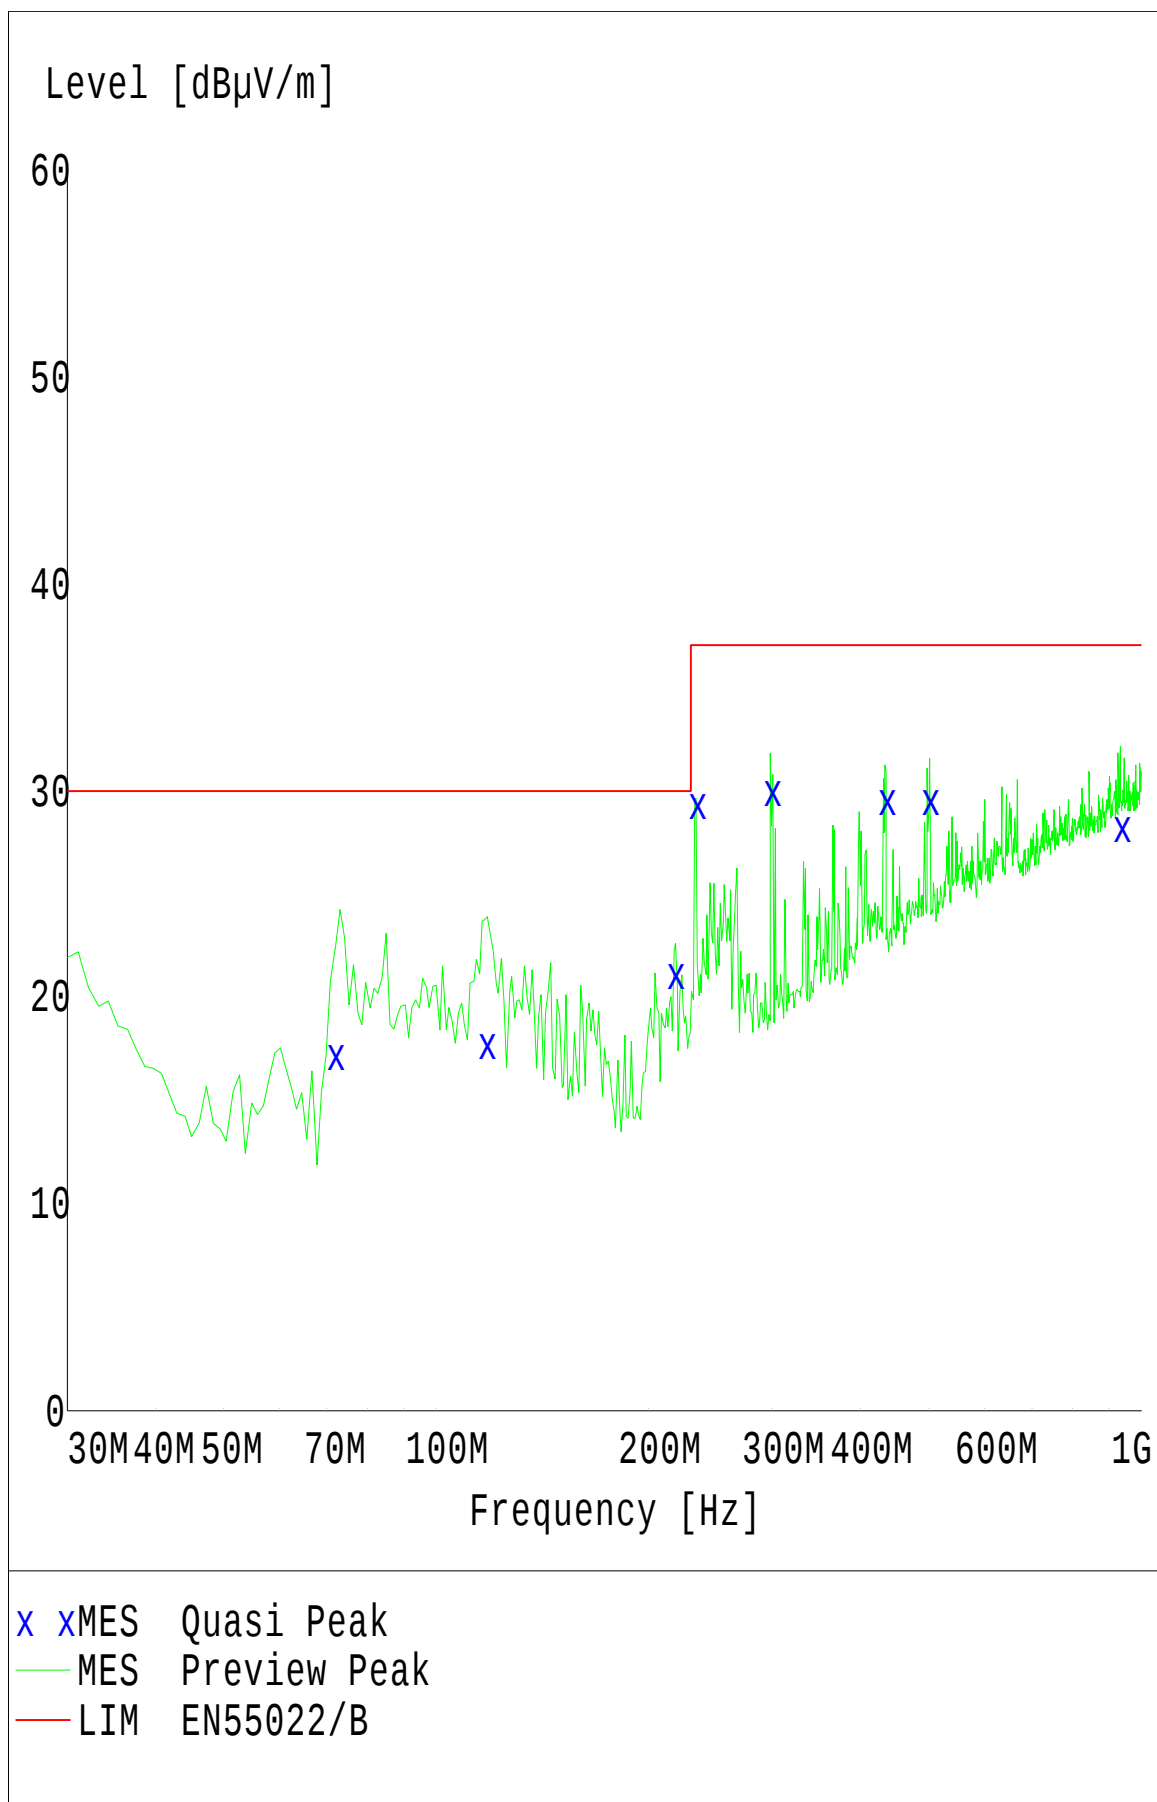

MEASUREMENT RESULT: "Quasi Peak"

05.05.00 13:44

Frequency	Level	Transd	Limit	Margin	Height	Azimuth	
Polarisation							
MHz	dBµV/m	dB	dBµV/m	dB	cm	deg	
71.700000	17.20	6.0	30.0	12.8	100.0	270.00	VERTICAL
117.510000	17.70	12.4	30.0	12.3	160.0	150.00	VERTICAL
217.380000	21.10	9.6	30.0	8.9	100.0	180.00	VERTICAL
233.250000	29.30	10.7	37.0	7.7	100.0	119.00	VERTICAL
298.140000	29.90	14.6	37.0	7.1	100.0	59.00	VERTICAL
433.230000	29.50	18.4	37.0	7.5	220.0	210.00	HORIZONTAL
499.860000	29.50	19.4	37.0	7.5	160.0	300.00	HORIZONTAL
934.500000	28.20	23.8	37.0	8.8	100.0	210.00	HORIZONTAL

**Radiated emission according to:
to FCC class B**

EUT: DT6-D1171 / PIII 866 MHz (Scenic xB-1171)
Manufacturer: Fujitsu Siemens Computers
Operating Condition: Scroll "H" 1024x768/85 Hz; HD/CD/Peripheral-Test
Test Site: Fujitsu Siemens Augsburg (10 m Semi Anechoic Chamber)
Operator: M. Heuser
Configuration: Full configuration
Comment: PSU: Astec E425
Start of Test: 27.04.00 / 17:11:06

SCAN TABLE: "FCC1-5GHz"

Short Description: 3m Messung FCC 1 bis 5 GHz
Unit: dBµV/m

Detector: Mode:

Curve 1: MaxPeak MaxHold
Curve 2: Average MaxHold


Subrange 1:

Start Frequency: 1.0 GHz Step Size: 300.0 kHz
Stop Frequency: 5.0 GHz
Measure Time: 10.0 ms
IF Bandwidth: 1 MHz

Receiver: ESXI Transducer: Tensor cal12-99
Signal Path: 2DC-CP7X1 System Transducer: RFin2-CP7/X1
Meas. Mode: Lin Add. Transd. 1: Rosenb. 8m
Tracking Gen.: Off Add. Transd. 2: None
Input: 2DC Add. Transd. 3: None

Preamplifier: 10 dB Demodulation: AM
RF Att.: Coupled Volume: 70 %
Ref. Level: -40.0 dBm Squelch: --
Min. RF Att.: 0 dB Option: None
IF Att.: --
Autorange: On

Curve 1: On Repetition: Single
Curve 2: On Stop Mark: Off
Stop Message: Off
Stop Message:

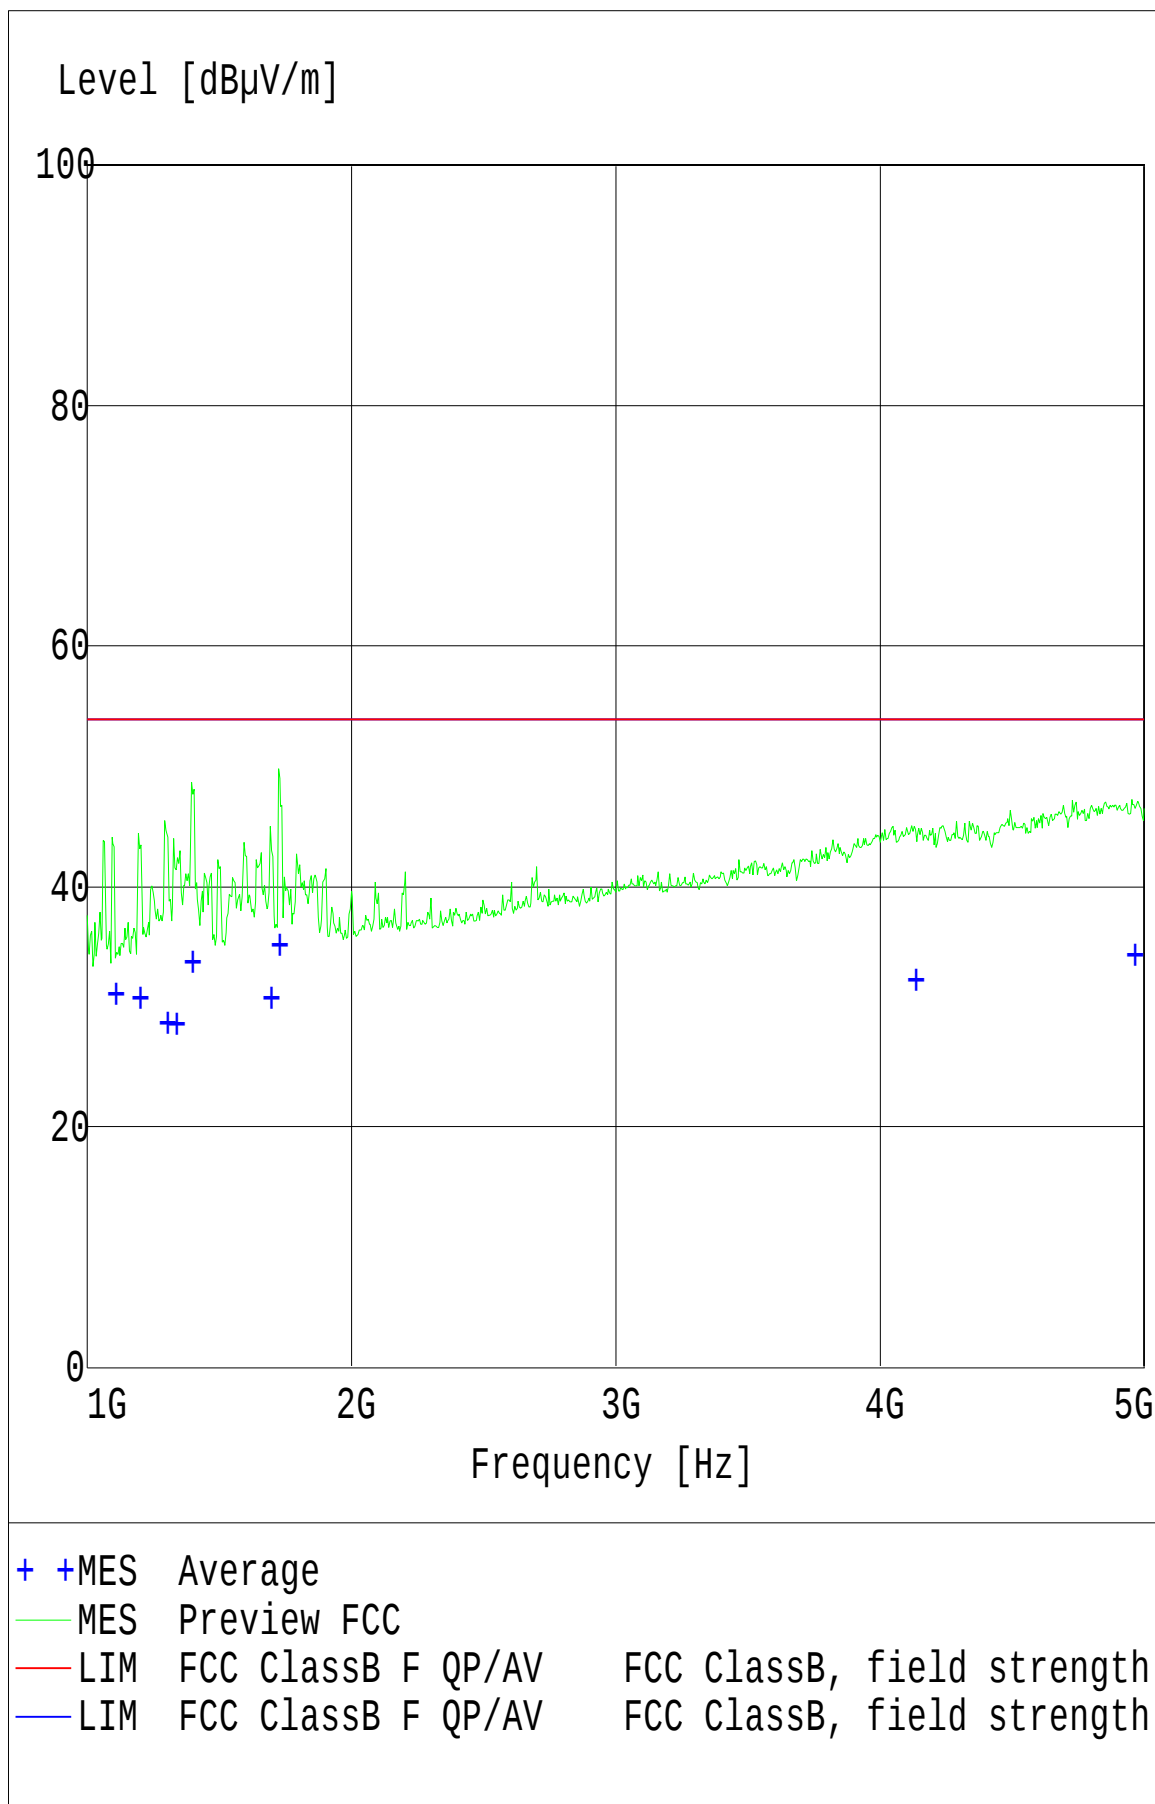

MEASUREMENT RESULT: "Average"

27.04.00 17:46

Frequency	Level	Transd	Limit	Margin	Height	Azimuth	
Polarisation							
MHz	dBµV/m	dB	dBµV/m	dB	cm	deg	
1099.600000	30.90	8.6	53.9	23.0	100.0	150.00	HORIZONTAL
1192.300000	30.70	9.3	53.9	23.2	100.0	150.00	HORIZONTAL
1296.400000	28.60	9.5	53.9	25.3	180.0	0.00	HORIZONTAL
1333.000000	28.50	9.5	53.9	25.4	120.0	29.00	VERTICAL
1391.200000	33.60	9.6	53.9	20.3	100.0	29.00	HORIZONTAL
1689.100000	30.70	11.1	53.9	23.2	120.0	29.00	VERTICAL
1722.100000	35.00	11.5	53.9	18.9	120.0	29.00	VERTICAL
4129.900000	32.10	18.8	53.9	21.8	240.0	180.00	HORIZONTAL
4956.400000	34.20	20.8	53.9	19.7	100.0	150.00	HORIZONTAL

**Radiated emission according to:
to EN55022 class B**

EUT: DT6-D1171 / PIII 866 MHz (Scenic xB-1171)
Manufacturer: Fujitsu Siemens Computers
Operating Condition: Scroll "H" 1024x768/85 Hz; HD/CD/Peripheral-Test
Test Site: Fujitsu Siemens Augsburg (10 m Semi Anechoic Chamber)
Operator: M. Rothtaucher
Configuration: Full configuration
Comment: PSU: Minebea E425
Start of Test: 05.05.00 / 15:25:31

SCAN TABLE: "10m/30-1000"

Short Description: 10m Field Strength
Unit: dBµV/m

Detector: Mode:

Curve 1: MaxPeak ClearWrite


Subrange 1:

Start Frequency: 30.0 MHz Step Size: 30.0 kHz
Stop Frequency: 1.0 GHz
Measure Time: 10.0 ms
IF Bandwidth: 120 kHz

Receiver: ESXI Transducer: CBL6112 cal. 8/99
Signal Path: 2DC-CP1X1 System Transducer: RFin2-CP1/X1
Meas. Mode: Lin Add. Transd. 1: cable30-1000
Tracking Gen.: Off Add. Transd. 2: None
Input: 2DC Add. Transd. 3: None

Preamplifier: 10 dB Demodulation: AM
RF Att.: Coupled Volume: 70 %
Ref. Level: -60.0 dBm Squelch: --
Min. RF Att.: 0 dB Option: None
IF Att.: --
Autorange: On

Curve 1: On Repetition: Single
Stop Mark: Off
Stop Message: Off
Stop Message:

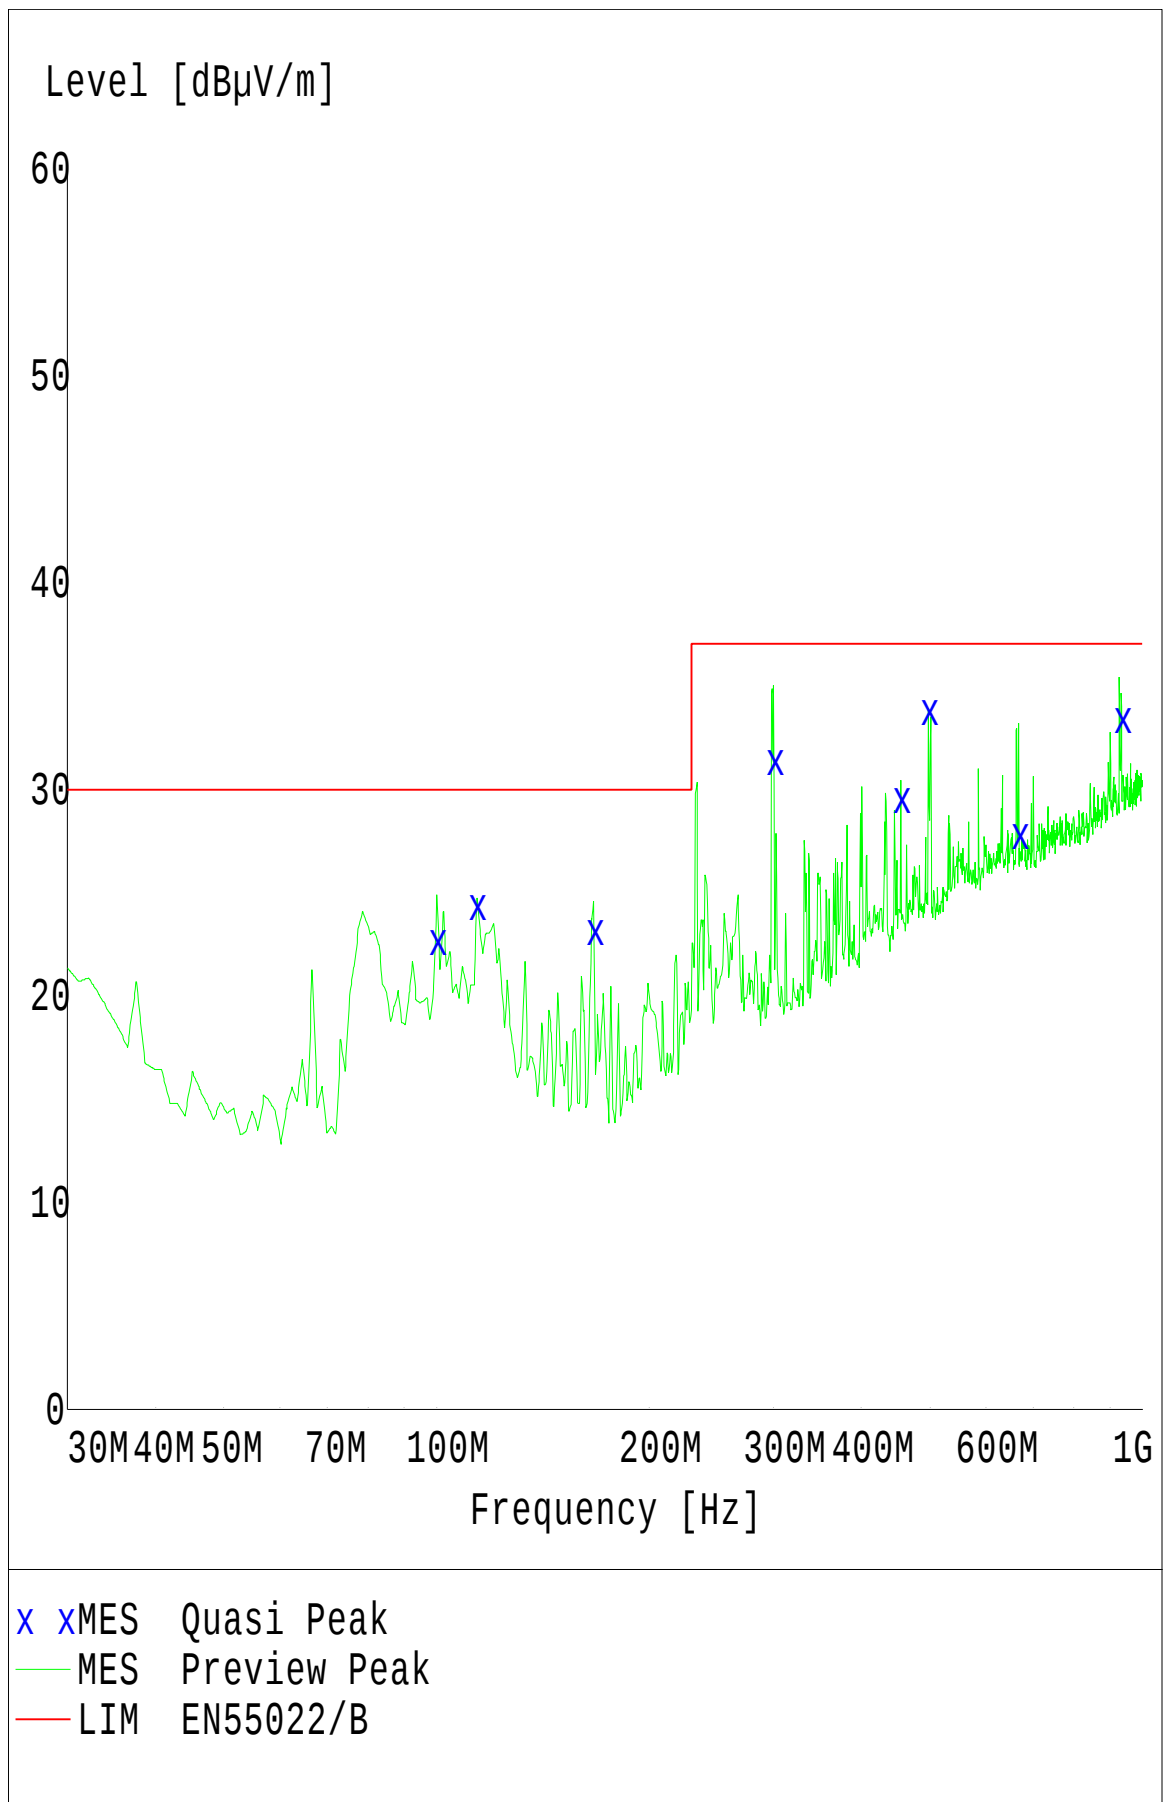

MEASUREMENT RESULT: "Quasi Peak"

05.05.00 16:41

Frequency	Level	Transd	Limit	Margin	Height	Azimuth	
Polarisation							
MHz	dBµV/m	dB	dBµV/m	dB	cm	deg	
99.960000	22.70	11.3	30.0	7.3	100.0	210.00	VERTICAL
113.430000	24.40	12.5	30.0	5.6	100.0	180.00	VERTICAL
166.620000	23.20	10.7	30.0	6.8	400.0	29.00	HORIZONTAL
299.970000	31.40	14.7	37.0	5.6	100.0	300.00	VERTICAL
453.630000	29.50	18.5	37.0	7.5	340.0	180.00	VERTICAL
496.800000	33.80	19.5	37.0	3.2	160.0	330.00	HORIZONTAL
666.570000	27.80	21.7	37.0	9.2	400.0	210.00	VERTICAL
933.090000	33.40	23.8	37.0	3.6	160.0	180.00	VERTICAL

**Radiated emission according to:
to FCC class B**

EUT: DT6-D1171 / PIII 866 MHz (Scenic xB-1171)
Manufacturer: Fujitsu Siemens Computers
Operating Condition: Scroll "H" 1024x768/85 Hz; HD/CD/Peripheral-Test
Test Site: Fujitsu Siemens Augsburg (10 m Semi Anechoic Chamber)
Operator: M. Rothtauscher
Configuration: Full configuration
Comment: PSU: Minebea E425
Start of Test: 27.04.00 / 16:20:32

SCAN TABLE: "FCC1-5GHz"

Short Description: 3m Messung FCC 1 bis 5 GHz
Unit: dBµV/m

Detector: Mode:

Curve 1: MaxPeak MaxHold
Curve 2: Average MaxHold


Subrange 1:

Start Frequency: 1.0 GHz Step Size: 300.0 kHz
Stop Frequency: 5.0 GHz
Measure Time: 10.0 ms
IF Bandwidth: 1 MHz

Receiver: ESXI Transducer: Tensor cal12-99
Signal Path: 2DC-CP7X1 System Transducer: RFin2-CP7/X1
Meas. Mode: Lin Add. Transd. 1: Rosenb. 8m
Tracking Gen.: Off Add. Transd. 2: None
Input: 2DC Add. Transd. 3: None

Preamplifier: 10 dB Demodulation: AM
RF Att.: Coupled Volume: 70 %
Ref. Level: -40.0 dBm Squelch: --
Min. RF Att.: 0 dB Option: None
IF Att.: --
Autorange: On

Curve 1: On Repetition: Single
Curve 2: On Stop Mark: Off
Stop Message: Off
Stop Message:

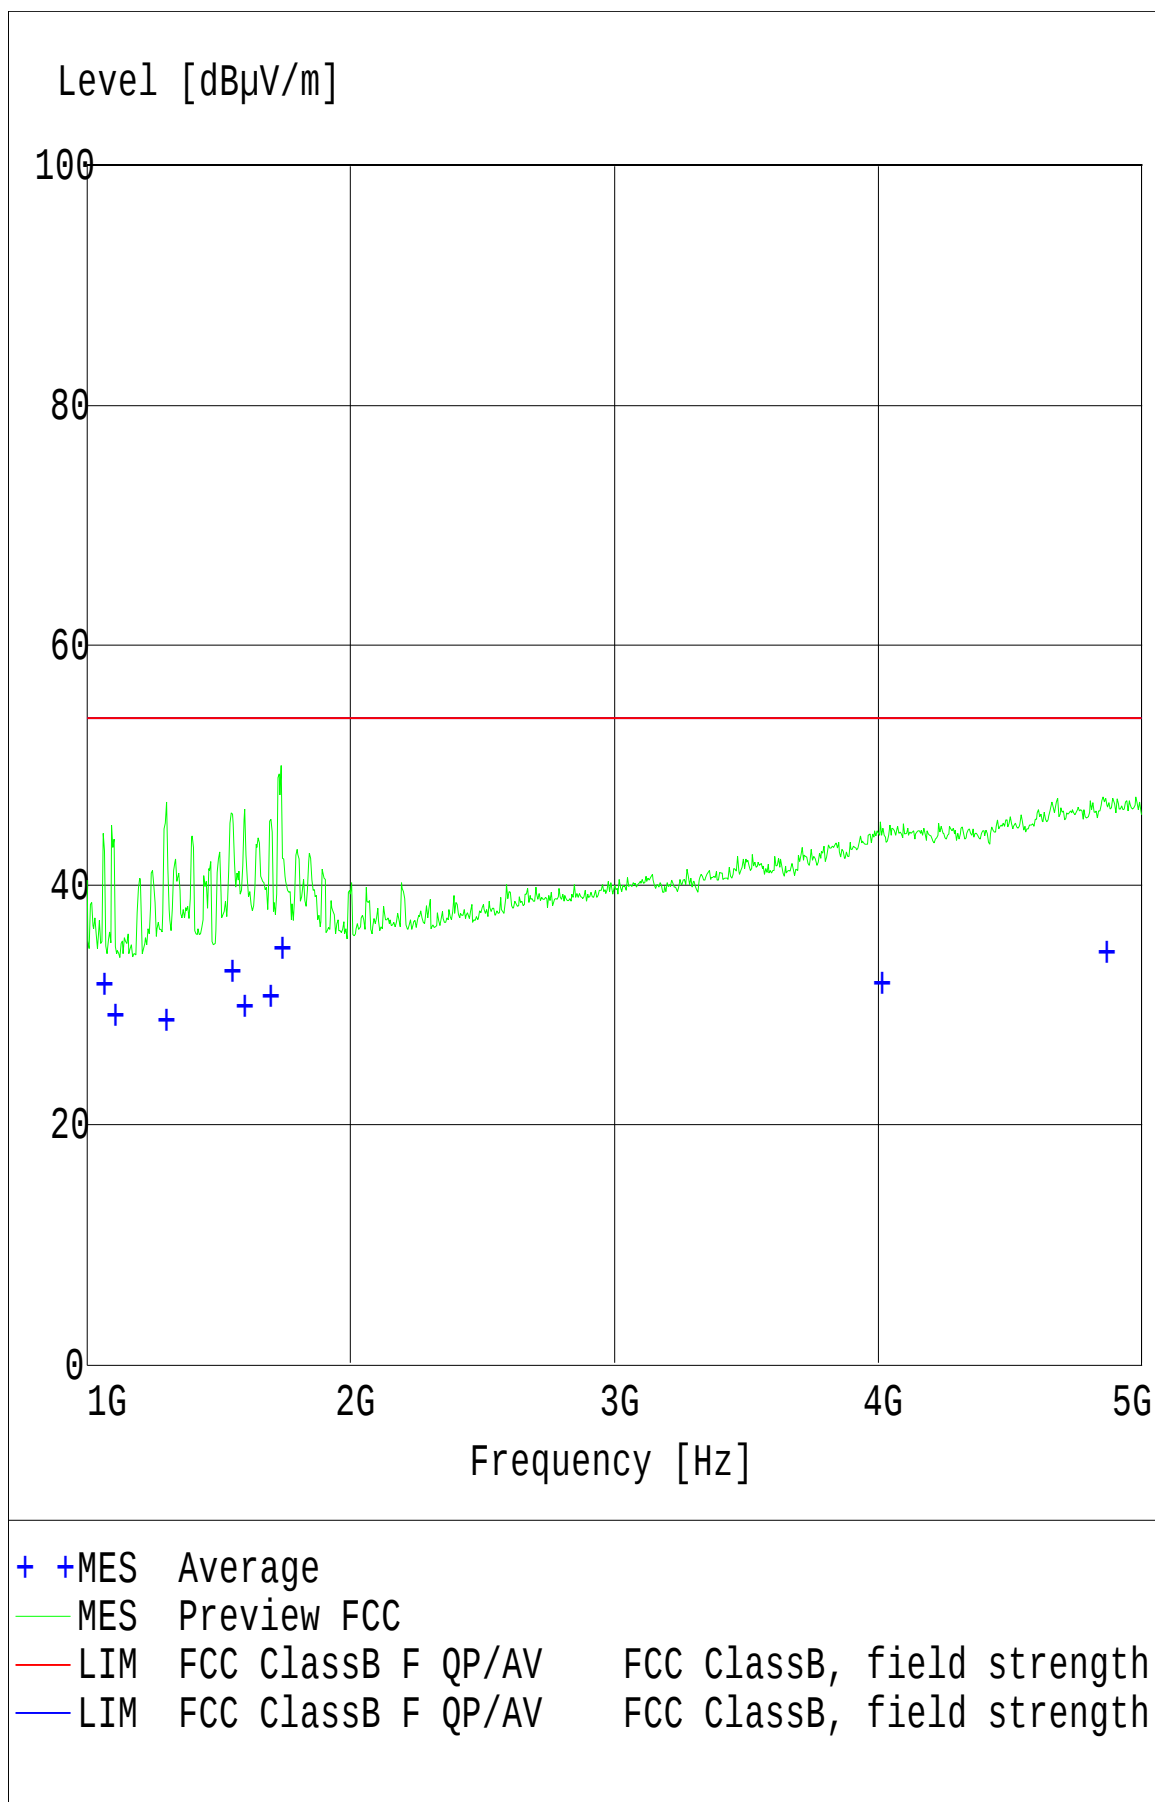

MEASUREMENT RESULT: "Average"

27.04.00 16:58

Frequency	Level	Transd	Limit	Margin	Height	Azimuth	
Polarisation							
MHz	dBµV/m	dB	dBµV/m	dB	cm	deg	
1060.000000	31.70	8.8	53.9	22.2	160.0	59.00	VERTICAL
1099.600000	29.10	8.6	53.9	24.8	100.0	210.00	HORIZONTAL
1294.600000	28.70	9.5	53.9	25.2	180.0	59.00	HORIZONTAL
1545.400000	32.80	9.9	53.9	21.1	100.0	0.00	VERTICAL
1590.100000	29.80	10.1	53.9	24.1	100.0	0.00	VERTICAL
1689.100000	30.70	11.1	53.9	23.2	120.0	330.00	VERTICAL
1732.900000	34.70	11.6	53.9	19.2	120.0	29.00	VERTICAL
4006.600000	31.80	19.4	53.9	22.1	280.0	180.00	VERTICAL
4860.100000	34.30	20.9	53.9	19.6	220.0	59.00	VERTICAL