

Testing Tomorrow's Technology

**Application
For**

**Part 2, Subpart J, Paragraph 2.907 Equipment Authorization of Certification for an
Intentional Radiator per Part 15, Subpart C, paragraph 15.247**

and

IC Radio Standards Specification: RSS-210

Permissive Change

For the

RFM / Cirronet Inc.,


Model(s):DNT90C and DNT90P

**FCC ID: HSW-DNT90
IC: 4492A-DNT90**

**UST Project: 11-0005
Issue Date: January 31, 2011**

Total Pages: 37

**3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com**

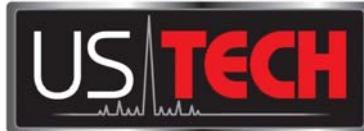

Testing Tomorrow's Technology

I certify that I am authorized to sign for the Test Agency and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US TECH (Agent Responsible For Test):

By: Alan Ghasiani

Name: 

Title: Consulting Engineer President

Date: January 28, 2011

This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of US Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided.

3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com

US Tech Test Report

FCC ID

Test Report Number:

Issue Date:

Customer:

Model:

FCC 15.247 B and C

HSW-DNT90

11-0005

January 28, 2011

RFM / Cirronet Inc.

DNT90C and DNT90P

MEASUREMENT TECHNICAL REPORT

COMPANY NAME: RFM / Cirronet Inc.

MODEL: DNT90C and DNT90P

FCC ID HSW-DNT90

DATE: January 28, 2011

This report concerns (check one): Original grant
Class II change

Equipment type: FHSS Transceiver Module

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? yes No

If yes, defer until: N/A
date

agrees to notify the Commission by N/A
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by:

US Tech
3505 Francis Circle
Alpharetta, GA 30004

Phone Number: (770) 740-0717

Fax Number: (770) 740-1508

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

Table of Contents

1 General Information	6
1.1 Purpose of this Report	6
1.2 Characterization of Test Sample.....	6
1.3 Product Description.....	7
1.4 Configuration of Tested System.....	8
1.5 Test Facility	9
2 Tests and Measurements	10
2.1 Test Equipment.....	10
2.2 Modifications to EUT Hardware	10
2.3 Number of Measurements for Intentional Radiators (15.31(m)).....	11
2.4 Frequency Range of Radiated Measurements (Part 15.33).....	11
2.4.1 Intentional Radiator	11
2.4.2 Unintentional Radiator	11
2.5 Measurement Detector Function and Bandwidth (CFR 15.35).....	11
2.6 EUT Antenna Requirements (CFR 15.203).....	12
2.7 Intentional Radiator, Radiated Emissions (Antenna Conducted) (CFR 15.209, 15.247(d)) (IC RSS 210, A2.9 (a))	14
2.8 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.247(d)) (IC RSS 210, A2.9 (a)) (Cont'd).	15
2.9 Band Edge Measurements – (CFR 15.247 (d)).....	30
2.10 Unintentional Radiator, Radiated Emissions (CFR 15.109 (a)).....	32
2.11 Unintentional Radiator Power Lines Conducted Emissions (CFR 15.107)	33
2.12 Measurement Uncertainty	34
2.12.1 Conducted Emissions Measurement Uncertainty:	34
2.12.2 Radiated Emissions Measurement Uncertainty:	34
2.13 20 dB Bandwidth Measurement per CFR 15.247, (IC RSS 210, A8.1)	35

List of Tables

Table 1 - EUT and Peripherals	9
Table 2 - Test Instruments	10
Table 3 - Number of Test Frequencies for Intentional Radiators	11
Table 4 - Allowed Antenna(s).....	12
Table 5 - Peak Radiated Harmonic & Spurious Emissions-Antenna 1.....	24
Table 6 - Peak Radiated Harmonic & Spurious Emissions-Antenna 2.....	25
Table 7 – Unintentional Radiator, Radiated Emissions.....	32
Table 8 - Power Line Conducted Emissions Data, Class B	33

List of Figures

Figure 1 - Test Configuration	13
Figure 2 - Antenna Conducted Spurious Emissions – Low Channel, Part 1	15
Figure 3 - Antenna Conducted Spurious Emissions – Low Channel, Part 2	16
Figure 4 - Antenna Conducted Spurious Emissions – Low Channel, Part 3	17
Figure 5 - Antenna Conducted Spurious Emissions - Mid Channel, Part 1	18
Figure 6 - Antenna Conducted Spurious Emissions – Mid Channel, Part 2	19
Figure 7 - Antenna Conducted Spurious Emissions – Mid Channel, Part 3	20
Figure 8 - Antenna Conducted Spurious Emissions – High Channel, Part 1	21
Figure 9 - Antenna Conducted Spurious Emissions - High Channel, Part 2	22
Figure 10 - Antenna Conducted Spurious Emissions - High Channel, Part 3	23
Figure 11 - Peak Antenna Conducted Output Power, Low Channel	27
Figure 12 - Peak Antenna Conducted Output Power, Mid Channel	28
Figure 13 - Peak Antenna Conducted Output Power, High Channel	29
Figure 14 - Radiated Band Edge Compliance – Low Channel	30
Figure 15 - Radiated Band Edge Compliance – High Channel	31
Figure 16 – Low Channel	36
Figure 17 – Mid Channel	37
Figure 18 – High Channel	38
Figure 19- Antenna 1 (Omni) Front View	39
Figure 20- Antenna 1(Omni) Back View	40
Figure 21- Antenna 2 (Yagi) Front View	41
Figure 22- Antenna 2 (Yagi) Back View	42

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

1 General Information

1.1 Purpose of this Report

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Industry Canada's Radio Standards Specification RSS-210 for a Class II Permissive Change to include the matching network between the TRC103 T/R module and the RF2040E SAW filter change. List of changed elements is found below. (For more detail see schematics) C52 and C53 were made DNS.

The matching network at the unbalanced port of the RF2040E was changed:

C54 now is 6.8pF
L13 now is 4.7nH
L14 now is 4.7nH

1.2 Characterization of Test Sample

The sample used for testing was received by US Tech on December 16, 2010 and January 24, 2011 in good operating condition.

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

1.3 Product Description

The DNT90 is a frequency hopping spread spectrum (FHSS) transceiver operating in the 902-928 MHz frequency band which provides for wireless connectivity for point-to-point, point-to-multipoint and store-and-forward radio applications. The DNT90 comes in two models, the DNT90C and DNT90P. The models are electrically identical and differ only in the mounting options. The DNT90C is a castellated version and the DNT90P is a pin version for socket mounting. The DNT90P was tested as a representative sample and referred to herein as DNT90.

Technical details:

Band of operation: 902-928 MHz

Number of hopping channels: 52

Channel spacing 480 KHz

Output power: 22 dBm

Over the air data rate: 100 Kbps

Modulation format: Gaussian filtered FSK

User interface rates: 9600 baud up to 230 Kbps

Receiver sensitivity: -100 dBm at 100 Kbps

Certification sub-type Frequency Hopper (>50 channels)

Emission Designator: F1D

Antennas: 5 dBi Omni(dipole), 6 dBi Yagi,

RF connector: UFL

1.4 Duty Cycle Correction

For average radiated measurements, using a 10.4% duty cycle, the measured level was reduced by a factor 19.66dB. The duty cycle correction factor is determined using the formula: $20\log (10.4/100) = 19.66\text{dB}$.

For details please the attached Annex Duty Cycle calculation.

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

1.5 Configuration of Tested System

The Test Sample was tested per *ANSI C63.4, Methods of Measurement of Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (2003)* for FCC subpart B Digital equipment Verification requirements and per FCC Public Notice DA 00-705 released March 30, 2000 for Frequency Hopping Spread Spectrum Systems operating under section 15.247. Also, Marker-Delta Method was followed to measure the upper band-edge.

Digital RF conducted and radiated Verification emissions data (FCC 15.107 and 109) below 1 GHz were taken with the measuring receiver (or spectrum analyzer's) resolution bandwidth adjusted to 9 kHz and 120 kHz, respectively. All measurements performed above 1.0 GHz were made with a RBW of 1 MHz. All measurements are peak unless stated otherwise. The video filter associated with the spectrum analyzer was off throughout the evaluation process.

A list of EUT and Peripherals is found in Table 1 below. A block diagram of the tested system is shown in Figure 1. Test configuration photographs for spurious and fundamental emissions are provided in separate Appendices.

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

1.6 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA 30004. This site has been fully described and registered with the FCC. Its designation number is US5117. Additionally this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file number 2982A-1.

Table 1 - EUT and Peripherals

PERIPHERAL MANUFACTURER.	MODEL NUMBER	SERIAL NUMBER	FCC ID:	CABLES P/D
(EUT) RFM / Cirronet Inc.	DNT90	None	HSW-DNT90	1m U USB
Switching Power Supply	--	None	None	6' U – P 120 VAC/ 60 Hz

US Tech Test Report

FCC ID

Test Report Number:

Issue Date:

Customer:

Model:

FCC 15.247 B and C

HSW-DNT90

11-0005

January 28, 2011

RFM / Cirronet Inc.

DNT90C and DNT90P

2 Tests and Measurements

2.1 Test Equipment

Table 2 below lists test equipment used to evaluate this product. Model numbers, serial numbers and their calibration status are included herewith.

Table 2 - Test Instruments

TEST INSTRUMENT	MODEL NUMBER	MANUFACTURER	SERIAL NUMBER	DATE OF LAST CALIBRATION
SPECTRUM ANALYZER	8593E	HEWLETT-PACKARD	3205A00124	10/18/2010
SPECTRUM ANALYZER	8566B	HEWLETT-PACKARD	2410A00109	10/29/10
RF PREAMP 100 kHz to 1.3 GHz	8447D	HEWLETT-PACKARD	2944A06291	9/7/10
BICONICAL ANTENNA 25 MHz to 200 MHz	3110B	EMCO	9307-1431	2/2/10
LOG PERIODIC 100 MHz to 1000 MHz	3146	EMCO	3110-3236	1/22/10 2 Year
HORN ANTENNA 1 GHz to 18 GHz	SAS-571	A. H. Systems	605	2/9/2010 2 Year
PREAMP 1 GHz to 26.5 GHz	8449B	HEWLETT-PACKARD	3008A00480	9/21/10
CALCULATION PROGRAM	N/A	N/A	Ver. 6.0	N/A

2.2 Modifications to EUT Hardware

No modifications were made by US Tech in order to bring the EUT into compliance with FCC Part 15, Subpart C Intentional Radiator Limits for the transmitter portion of the EUT or the Subpart B Unintentional Radiator Limits (Receiver and Digital Device) Requirements.

2.3 Number of Measurements for Intentional Radiators (15.31(m))

Measurements of intentional radiators or receivers shall be performed and reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in Table 3 as follows:

Table 3 - Number of Test Frequencies for Intentional Radiators

Frequency Range over which the device operates	Number of Frequencies	Location in the Range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near the top 1 near the bottom
Greater than 10 MHz	3	1 near top 1 near middle 1 near bottom

Because the EUT operates over 902 MHz to 928 MHz, 3 test frequencies will be used.

2.4 Frequency Range of Radiated Measurements (Part 15.33)

2.4.1 Intentional Radiator

The spectrum shall be investigated for the intentional radiator from the lowest RF signal generated in the EUT, without going below 9 kHz to the 10th harmonic of the highest fundamental frequency generated or 40 GHz, whichever is the lowest.

2.4.2 Unintentional Radiator

For the digital device, an unintentional radiator, the frequency range shall be 30 MHz to 1000 MHz, or to the range specified in 2.4.1 above, whichever is the higher range of investigation.

2.5 Measurement Detector Function and Bandwidth (CFR 15.35)

The radiated and conducted emissions limits shown herein are based on the following:

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

2.6 EUT Antenna Requirements (CFR 15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. RFM / Cirronet Inc. will sell the RF Module with the following antennas:

Table 4 - Allowed Antenna(s)

MANUFACTURER	TYPE OF ANTENNA	MODEL	REPORT REFERENCE	GAIN dB _i
CUSHCRAFT Cor.	Omni Antenna	8963B	Antenna 1	5
Astron wireless	Yagi	ISM Spread Spectrum/Video 918-2	Antenna 2	6

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

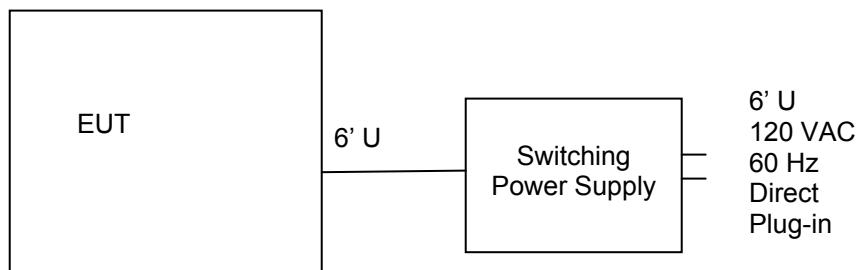


Figure 1 - Test Configuration

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

2.7 Intentional Radiator, Radiated Emissions (Antenna Conducted) (CFR 15.209, 15.247(d)) (IC RSS 210, A2.9 (a))

The EUT was put into a continuous-transmit mode of operation and tested per FCC Public Notice DA 00-705, for conducted out of band emissions emanating from the antenna port over the frequency range of 30 MHz to 12.5 GHz. A conducted scan was performed on the EUT to identify and record spurious signals that were related to the transmitter. Antenna Conducted Emissions of a significant magnitude that fell within restricted bands were then measured as radiated emissions on the OATS. The conducted emissions graphs are found in figures 4 through 10 below. The limit for antenna conducted power is 1 Watt (30 dBm) per 15.247 (b)(3) and b(4).

For radiated measurements, the EUT was set into a continuous transmission mode. Below 1 GHz, the RBW of the measuring instrument was set equal to 120 kHz. Peak measurements above 1 GHz were measured using a RBW = 1 MHz, with a VBW \geq RBW. The results of peak radiated spurious emissions falling within restricted bands are given in Table 5, 6 and 7 below.

For Average Voltage measurements above 1 GHz, the emissions were measured using RBW = 1 MHz and VBW = 10 Hz. For a pulse-modulated transmitter, the EUT's average emissions are further modified by adding to them the worst-case duty cycle, determined by adding the EUT's total pulse widths (on time) over a 100 ms period and dividing by 100 ms.

On the OATS, the EUT was mounted on top of a non-conductive table, 80 cm above the floor, by placing it in the X-Z plane along the Z axis with its bottom cover in parallel with the ground. The front of the EUT faced the measurement antenna located 3 meters away. Each signal measured was maximized by raising and lowering the receive antenna between 1 and 4 meters in height while monitoring the ever changing spectrum analyzer display (with channel A in the Clear-Write mode and channel B in the Max-Hold mode) for the largest signal visible. That exact antenna height where the signal was maximized was recorded for reproducibility purposes. Also, the EUT was rotated about its Y-axis while monitoring the Spectrum Analyzer display for maximum. The EUT azimuth was recorded for reproducibility purposes. The EUT was measured when both maxima were simultaneously satisfied. Data is shown in table 5~7.

For test data, see Tables 5 and 7. Radiated emissions above 3 GHz were measured at a distance of 3 meter. There were no test failures.

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

2 Test and Measurements (Cont'd)

2.8 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.247(d)) (IC RSS 210, A2.9 (a)) (Cont'd).

Note: Large Signal shown is Fundamental Frequency

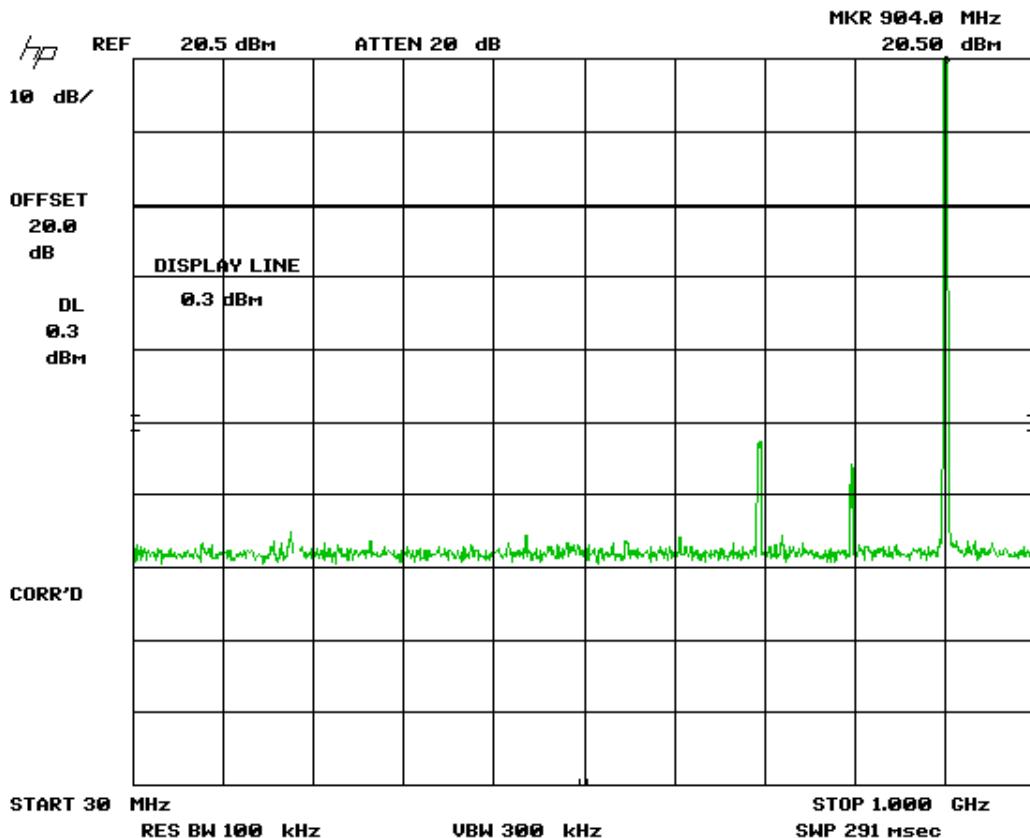


Figure 2 - Antenna Conducted Spurious Emissions – Low Channel, Part 1

US Tech Test Report

FCC ID

Test Report Number:

Issue Date:

Customer:

Model:

FCC 15.247 B and C

HSW-DNT90

11-0005

January 28, 2011

RFM / Cirronet Inc.

DNT90C and DNT90P

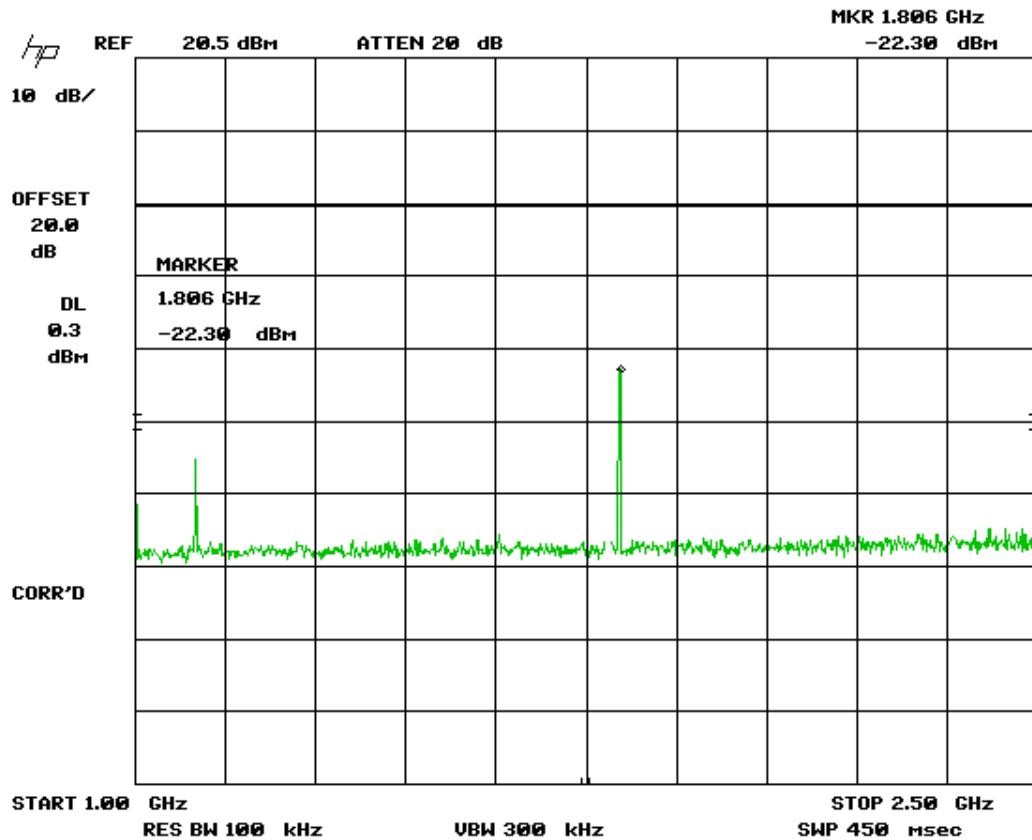


Figure 3 - Antenna Conducted Spurious Emissions – Low Channel, Part 2

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

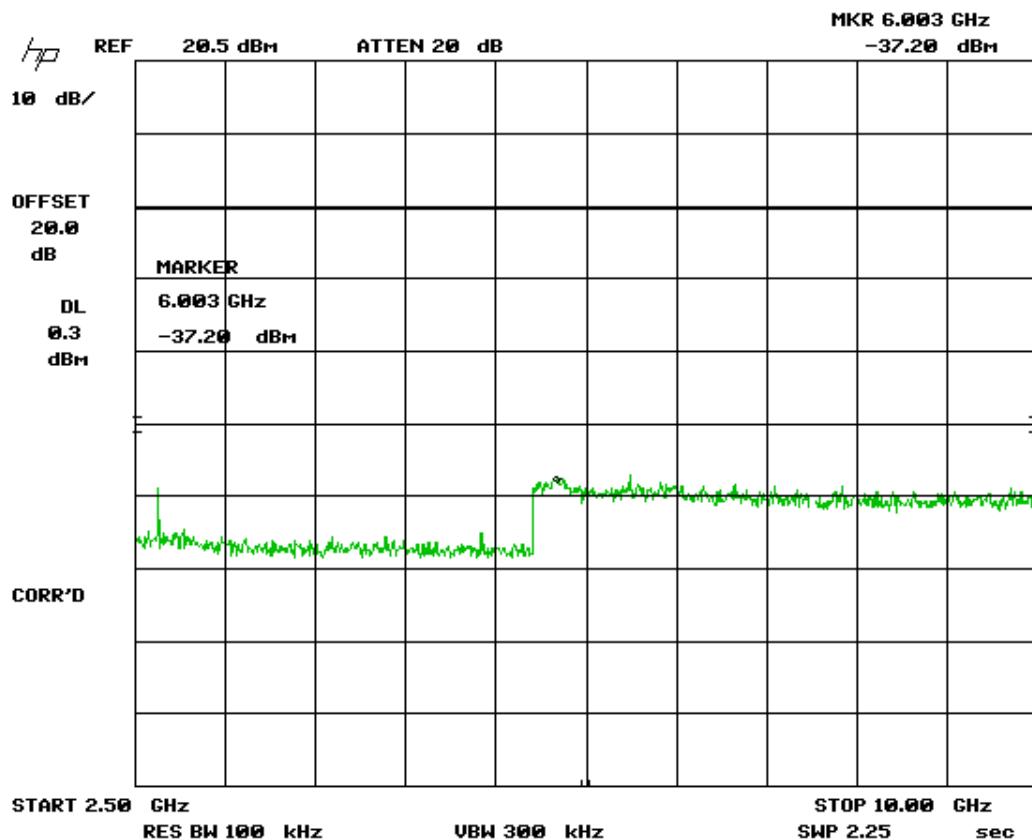


Figure 4 - Antenna Conducted Spurious Emissions – Low Channel, Part 3

US Tech Test Report

FCC ID

Test Report Number:

Issue Date:

Customer:

Model:

FCC 15.247 B and C

HSW-DNT90

11-0005

January 28, 2011

RFM / Cirronet Inc.

DNT90C and DNT90P

Note: Signal shown represents Fundamental Frequency

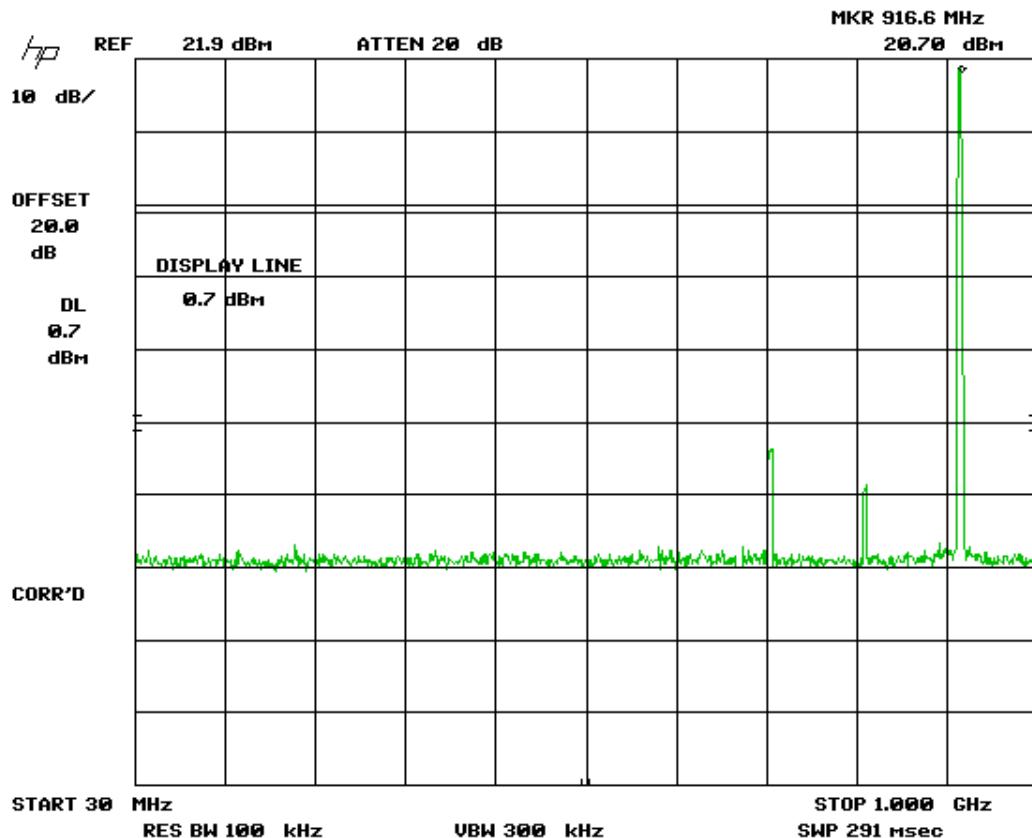


Figure 5 - Antenna Conducted Spurious Emissions - Mid Channel, Part 1

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

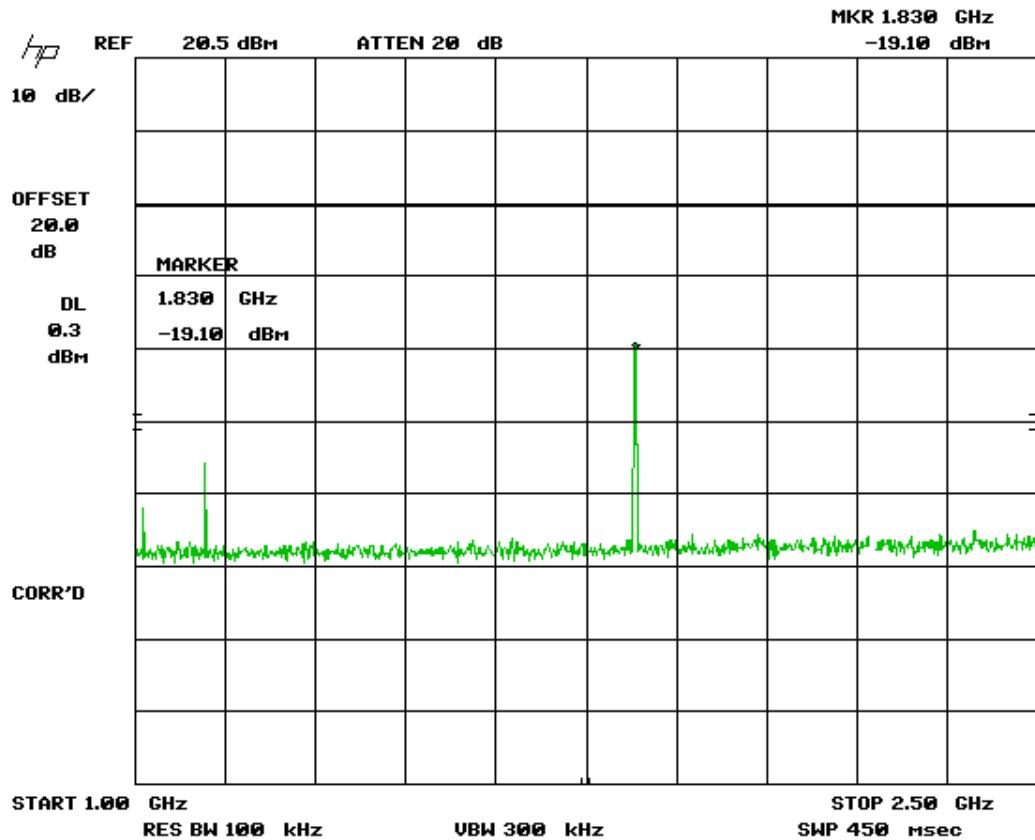


Figure 6 - Antenna Conducted Spurious Emissions – Mid Channel, Part 2

US Tech Test Report

FCC ID

Test Report Number:

Issue Date:

Customer:

Model:

FCC 15.247 B and C

HSW-DNT90

11-0005

January 28, 2011

RFM / Cirronet Inc.

DNT90C and DNT90P

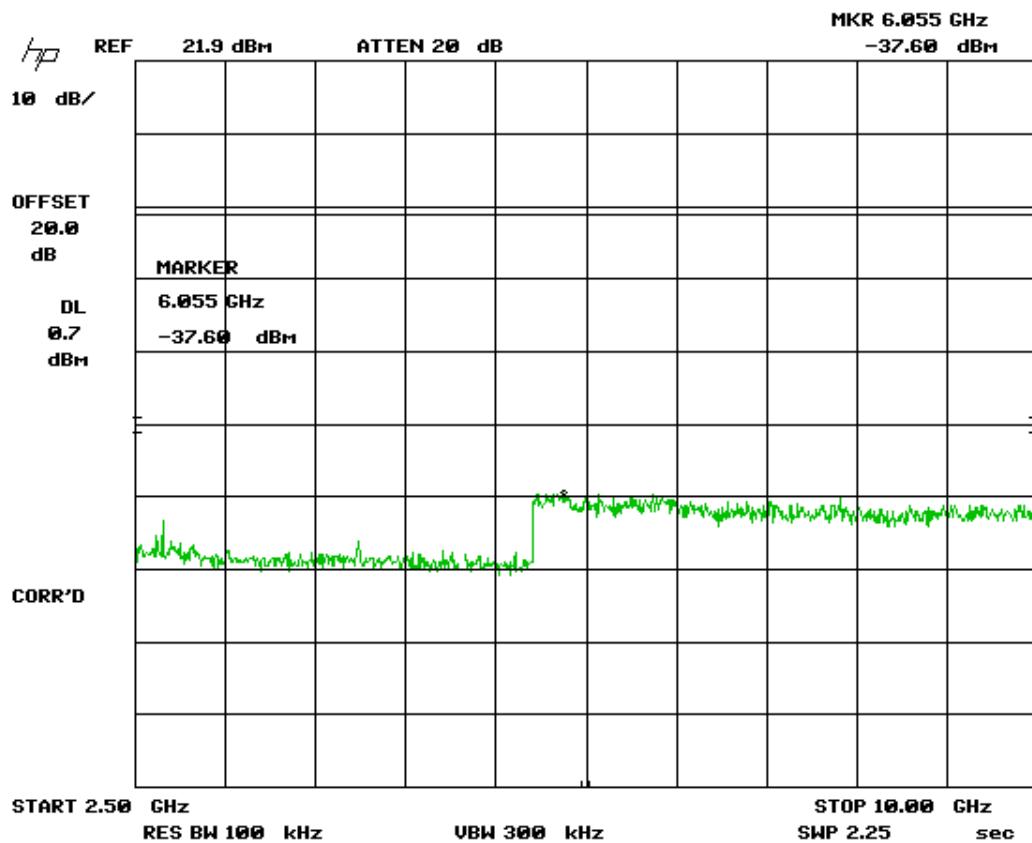


Figure 7 - Antenna Conducted Spurious Emissions – Mid Channel, Part 3

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

Note: Large Signal shown is Fundamental Frequency

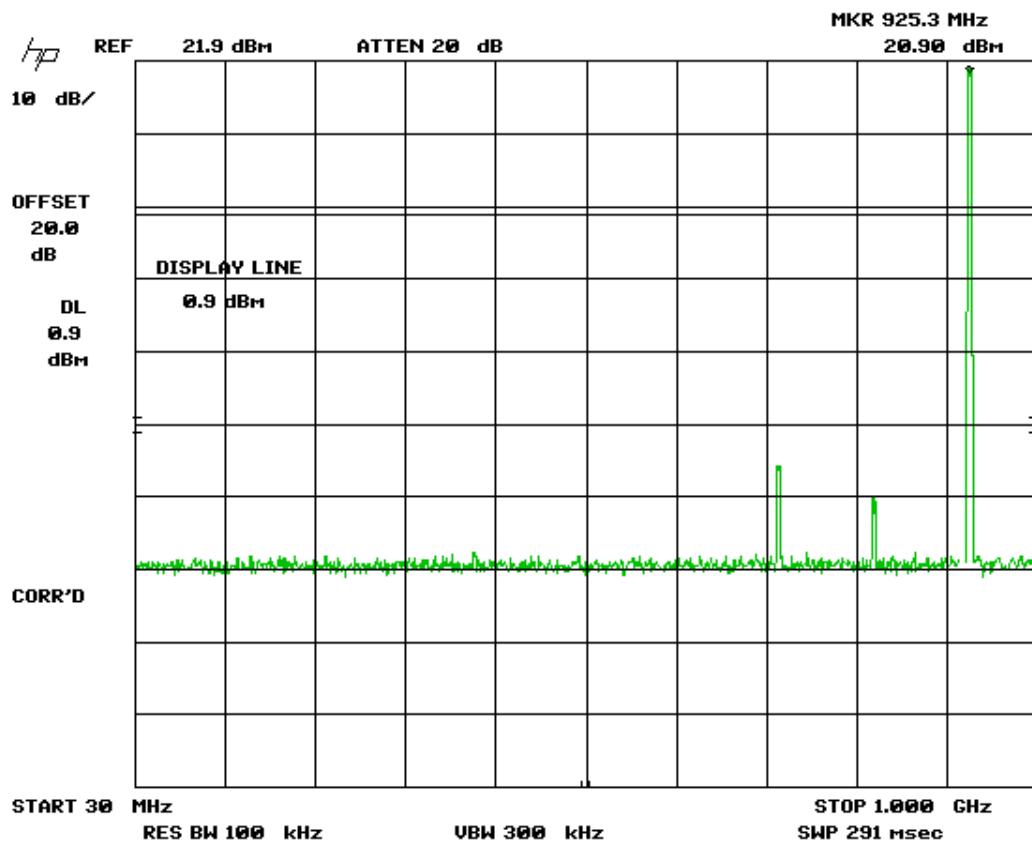


Figure 8 - Antenna Conducted Spurious Emissions – High Channel, Part 1

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

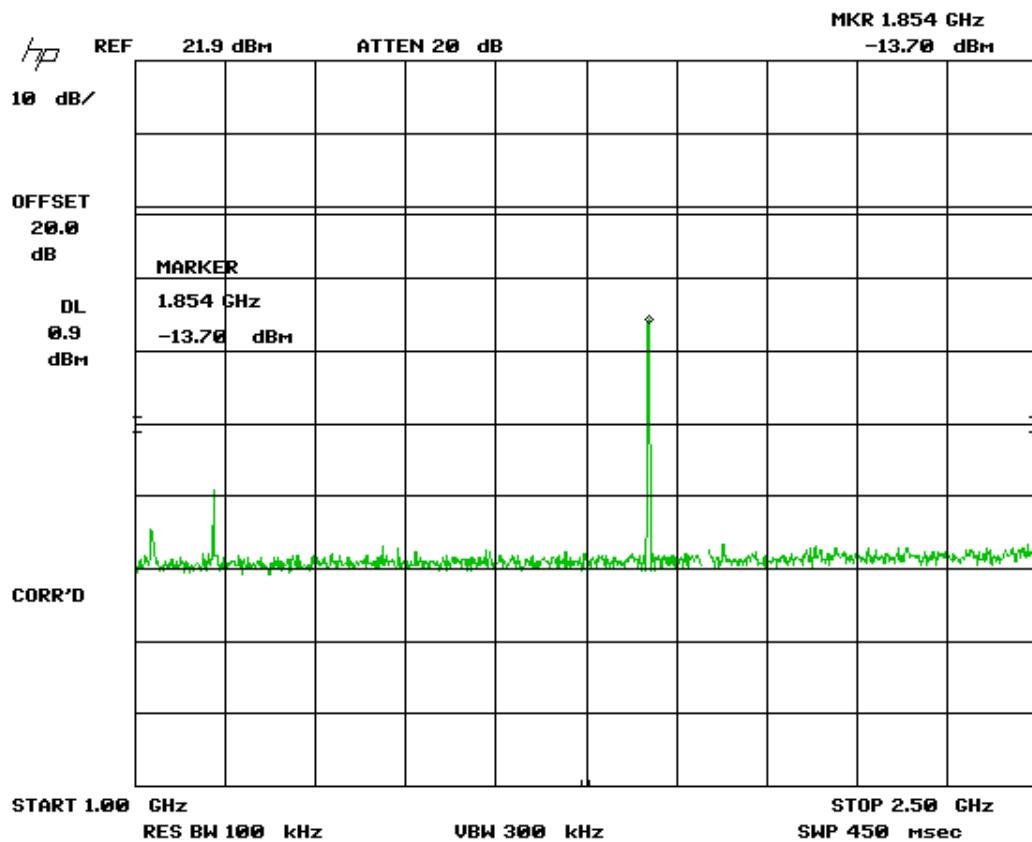


Figure 9 - Antenna Conducted Spurious Emissions - High Channel, Part 2

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

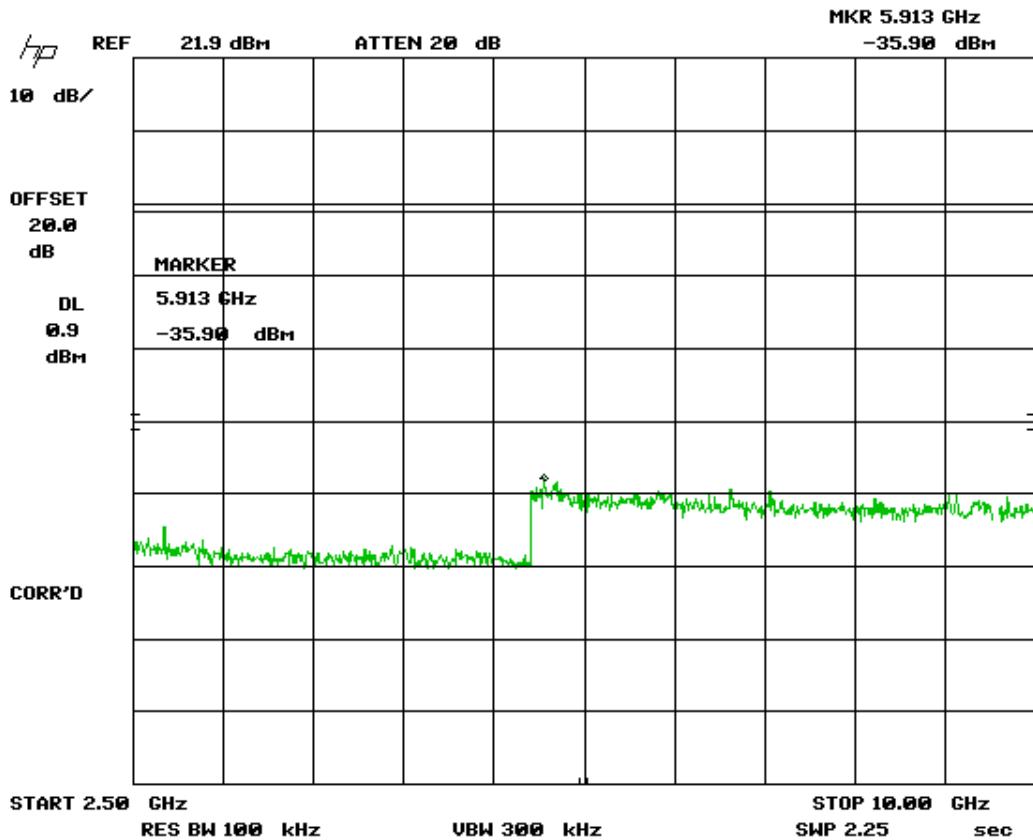


Figure 10 - Antenna Conducted Spurious Emissions - High Channel, Part 3

US Tech Test Report
 FCC ID
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC 15.247 B and C
 HSW-DNT90
 11-0005
 January 28, 2011
 RFM / Cirronet Inc.
 DNT90C and DNT90P

Table 5 - Peak Radiated Harmonic & Spurious Emissions-Antenna 1

Radiated Harmonic and Spurious Emissions								
Tested By: K.M.	Test: FCC Part 15, Para 15.247(d)				Client: RFM / Cirronet Inc.			
	Project: 11-0005				Model: DNT90			
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Pass Margin (dB)	Detector PK / AVG
LOW BAND - PEAK								
2707.88	66.10	--	-1.63	64.47	74.0	3.0m./	9.5	PK
3611.50	55.58	--	0.32	55.90	74.0	3.0m./	18.1	PK
4514.33	55.68	--	3.31	58.99	74.0	3.0m./	15.0	PK
5415.45	57.59	--	6.51	64.10	74.0	3.0m./	9.9	PK
2707.88	66.10	--	-1.63	64.47	74.0	3.0m./	9.5	PK
3611.50	55.58	--	0.32	55.90	74.0	3.0m./	18.1	PK
MID BAND- PEAK								
2745.25	66.14	--	-1.67	64.47	74.0	3.0m./	9.5	PK
3660.46	57.72	--	0.52	58.24	74.0	3.0m./	15.8	PK
4575.63	59.98	--	3.55	63.53	74.0	3.0m./	10.5	PK
7321.92	54.11	--	3.25	57.36	74.0	3.0m./	16.6	PK
8241.38	57.59	--	6.51	64.10	74.0	3.0m./	9.9	PK
HIGH BAND- PEAK								
2781.32	65.61	--	-1.65	63.96	74.0	3.0m./	10.0	PK
3708.46	58.62	--	0.83	59.45	74.0	3.0m./	14.5	PK
4636.63	60.46	--	3.91	64.37	74.0	3.0m./	9.6	K
7416.57	47.87	--	10.34	58.21	74.0	3.0m./	15.8	PK
8345.61	47.73	--	10.62	58.35	74.0	3.0m./	15.6	PK

- Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 & 20 dB relaxation of CFR 15.35.

Note: the EUT passes the Average limits using 20dB relaxation factor with peak values.

SAMPLE CALCULATION:

RESULTS: At 2707.88 MHz: = 66.10 dBuV (-1.63) dB/m = 64.47 dBuV/m @ 3m
 Margin = (74.0 – 64.47) = 9.5 dB

Test Date: December 16, 2010

Tested By

Signature: Keyvan Muvahhid

Name: **Keyvan Muvahhid**

US Tech Test Report
 FCC ID
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC 15.247 B and C
 HSW-DNT90
 11-0005
 January 28, 2011
 RFM / Cirronet Inc.
 DNT90C and DNT90P

Table 6 - Peak Radiated Harmonic & Spurious Emissions-Antenna 2

Radiated Harmonic and Spurious Emissions,								
Tested By: K.M.	Test: FCC Part 15, Para 15.247(d)				Client: RFM / Cirronet Inc.			
	Project: 11-0005				Model: DNT90			
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Pass Margin (dB)	Detector PK / AVG
LOW BAND - PEAK								
2707.81	69.67	--	-1.63	68.04	74.0	3.0m./	6.0	PK
3610.42	63.16	--	0.32	63.48	74.0	3.0m./	10.5	PK
4514.25	63.01	--	3.31	66.32	74.0	3.0m./	7.7	PK
5415.79	53.62	--	6.57	60.19	74.0	3.0m./	13.8	PK
8123.39	48.32	--	10.45	58.77	74.0	3.0m./	15.2	PK
MID BAND- PEAK								
2745.35	68.60	--	-1.63	66.97	74.0	3.0m./	7.0	PK
3660.31	60.79	--	0.52	61.31	74.0	3.0m./	12.7	PK
4575.55	64.24	--	3.41	67.65	74.0	3.0m./	6.4	PK
7322.70	46.57	--	10.85	57.42	74.0	3.0m./	16.6	PK
8236.58	47.45	--	10.53	57.98	74.0	3.0m./	16.0	PK
HIGH BAND- PEAK								
2781.25	67.50	--	-1.65	65.85	74.0	3.0m./	8.1	PK
3708.39	61.79	--	0.83	62.62	74.0	3.0m./	11.4	PK
4635.48	65.37	--	3.90	69.27	74.0	3.0m./	4.7	PK

- Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 & 20 dB relaxation of CFR 15.35.

SAMPLE CALCULATION:

RESULTS: At 2707.81 MHz: = 69.67 dBuV + (-1.63) dB/m = 68.04 dBuV/m @ 3m
 Margin = (74.0 – 68.04) = 6.0 dB

Test Date: December 16, 2010

Tested By

Signature: Keyvan Muvahhid

Name: Keyvan Muvahhid

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

2.12 Maximum Peak Conducted Output Power (CFR 15.247 (b) (3))

The DNT90 module, the transmitter, was programmed to operate at a maximum of +22 dBm across the bandwidth.

Peak power within the band 902 MHz to 928 MHz was measured per FCC KDB Publication DA 00-705 as an Antenna Conducted test with a spectrum analyzer by connecting the spectrum analyzer directly, via a short RF cable, to the antenna output terminals on the EUT. The spectrum analyzer was set for an impedance of 50 Ω with the RBW set greater than the 6 dB bandwidth of the EUT, and the VBW \geq RBW. The loss of the short cable is 0.3 dB, and the final corrected measurements were determined by adding 0.3 dB to the raw data measured values of Figures 12, 13 & 14. Peak antenna conducted output power is tabulated in Table 9 below.

Antenna Conducted Output Power was measured at Low Channel, Mid Channel and High Channel frequencies. See Figures 3 to 8 above. The 0.3 dB loss for the RF wire is taken into consideration here (Corrected Measurement column).

Table 9 - Peak Antenna Conducted Output Power per Part 15.247 (b) (3) (Same as EIRP)

Frequency of Fundamental (MHz)	Raw Test Data dBm	Corrected Measurement (dBm)	Corrected Measurement (mW)	FCC Limit (mW Maximum)
Low Band (902.5 MHz)	21.00	21.3	134.89	1000
Mid Band (915.0 MHz)	21.00	21.3	134.89	1000
High Band (926.7 MHz)	21.30	21.6	144.54	1000

Test Date: January 25, 2010

Tested By

Signature: Keyvan Muvahhid

Name: Keyvan Muvahhid

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

2 Test and Measurements (Cont'd)

2.12 Peak Power Output (CFR 15.247 (b)(3))

Add 0.3 dB loss for cable attenuation

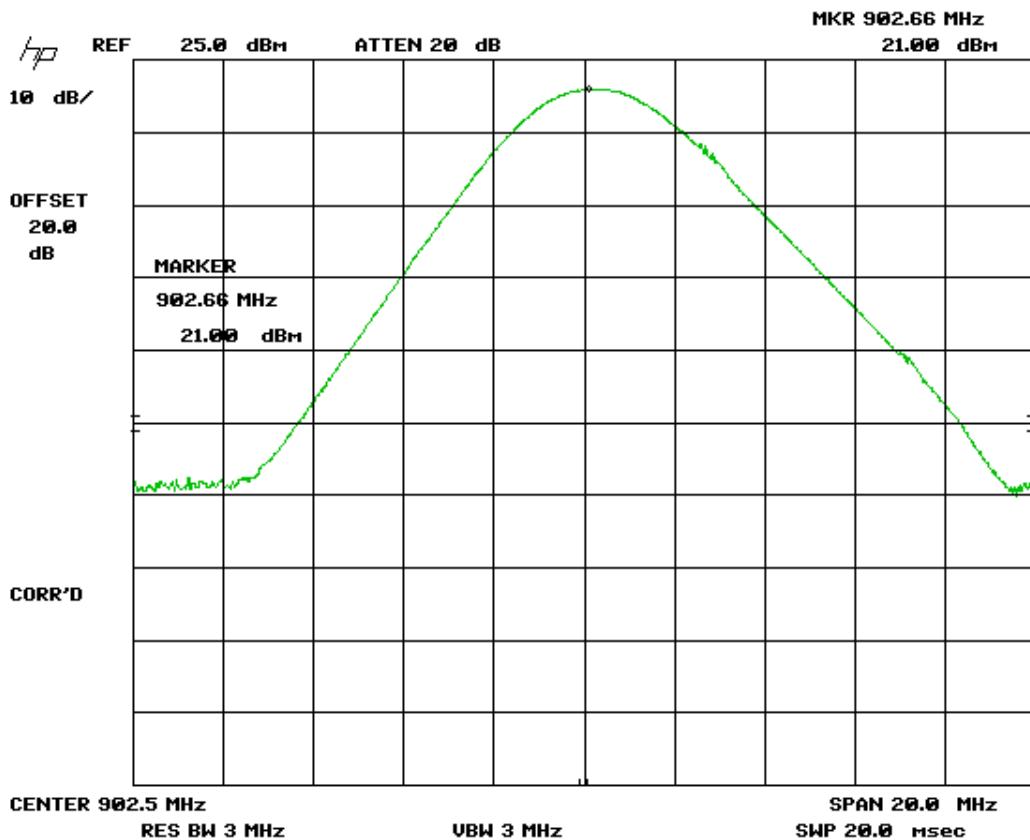


Figure 11 - Peak Antenna Conducted Output Power, Low Channel

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

2 Test and Measurements (Cont'd)

2.12 Peak Power Output (CFR 15.247 (b)(3))

Add 0.3 dB loss for cable assembly

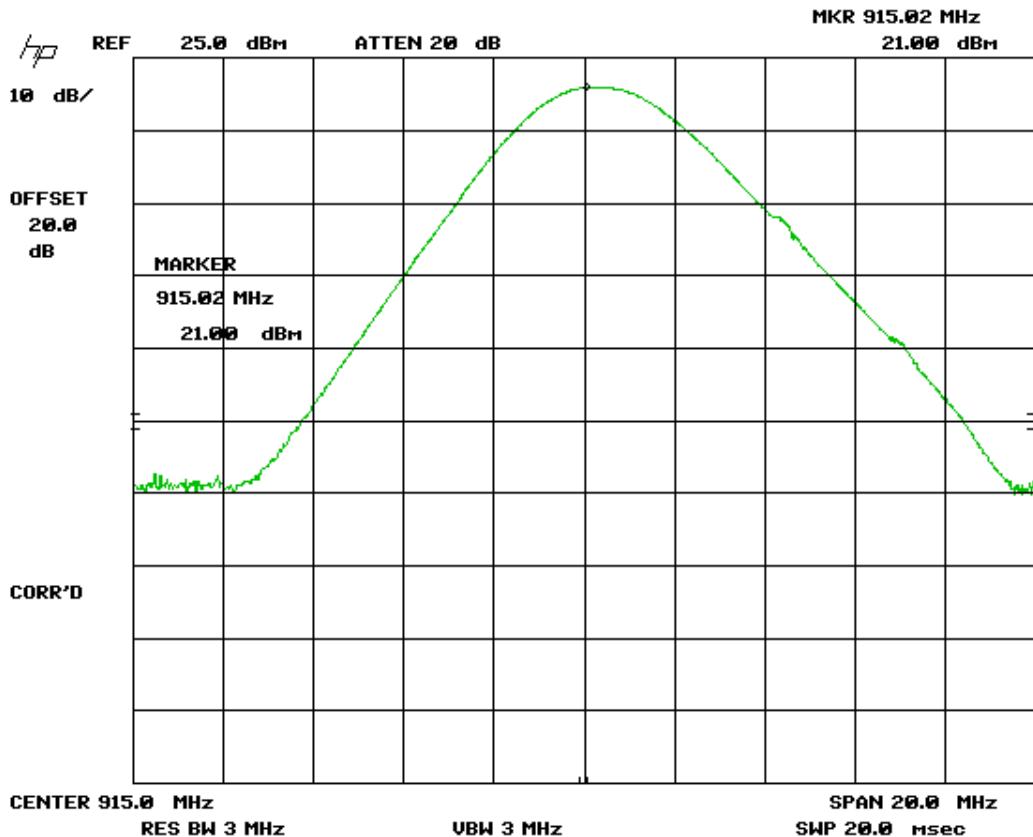


Figure 12 - Peak Antenna Conducted Output Power, Mid Channel

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

2 Test and Measurements (Cont'd)

2.12 Peak Power Output (CFR 15.247 (b)(3))

Add 0.3 dB loss for cable assembly.

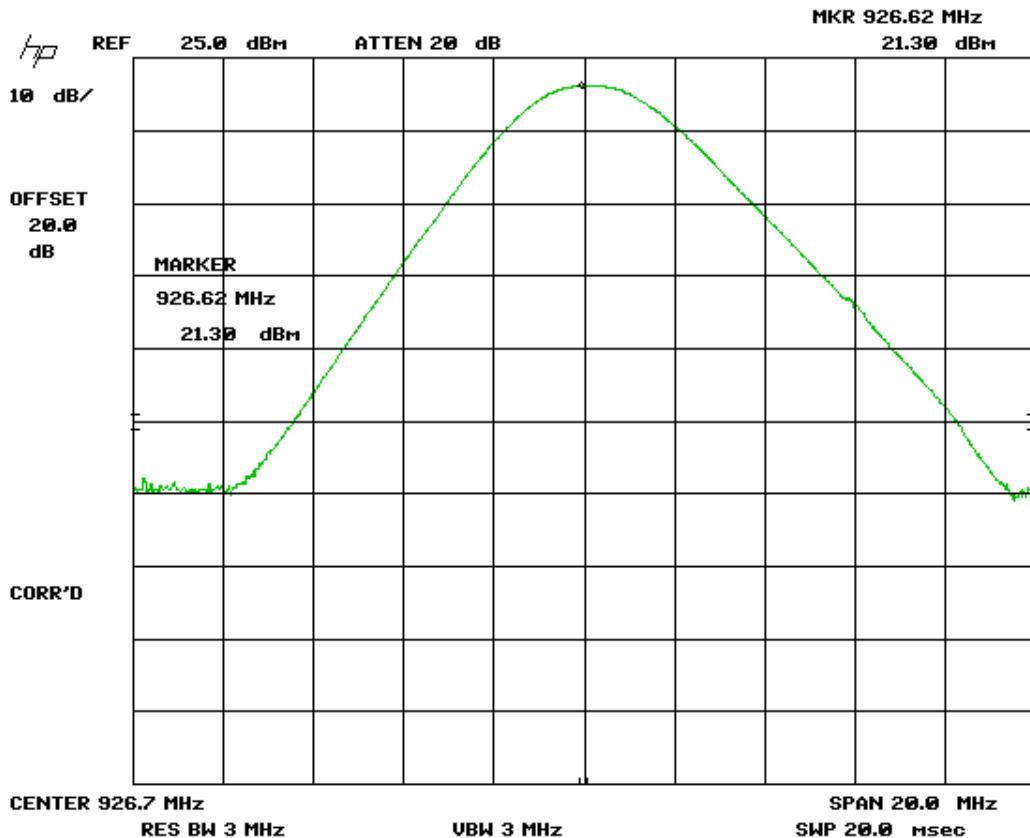


Figure 13 - Peak Antenna Conducted Output Power, High Channel

2.9 Band Edge Measurements – (CFR 15.247 (d))

Band Edge measurements are made with the EUT initially operating on the Lowest Channel and then operating on the Highest Channel within its band of operation. Antenna port conducted measurements are performed to demonstrate compliance with the requirement of 15.247(d) that all emissions outside of the band edges be attenuated by at least 20 dB when compared to its highest in-band value (contained in a 100 kHz band). Because these frequencies occur above 1000 MHz they have both a peak and average requirement.

Set the Spectrum Analyzer frequency span large enough (usually around 10 MHz) to capture the peak level of the emission operating on the channel closest to the band edge as well as any modulation products falling outside of the authorized band of operation. Conducted measurements are performed with $RBW \geq 1\%$ of the frequency span. In all cases, the VBW is set $\geq RBW$.

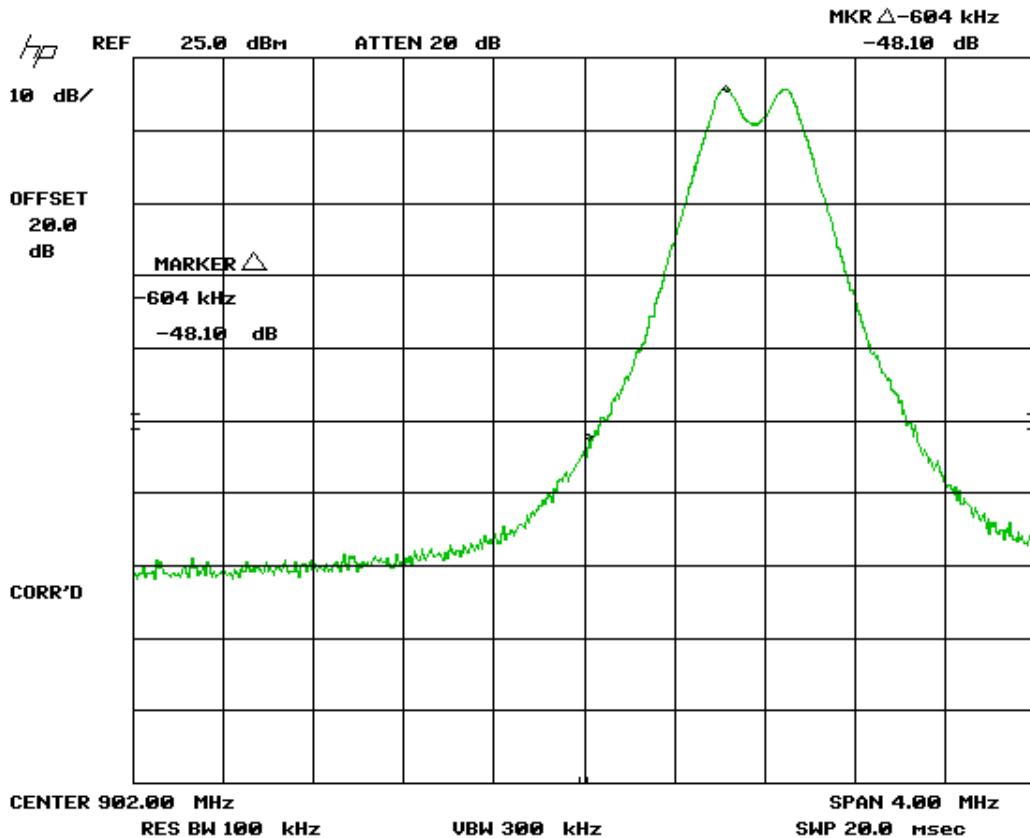


Figure 14 - Radiated Band Edge Compliance – Low Channel

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

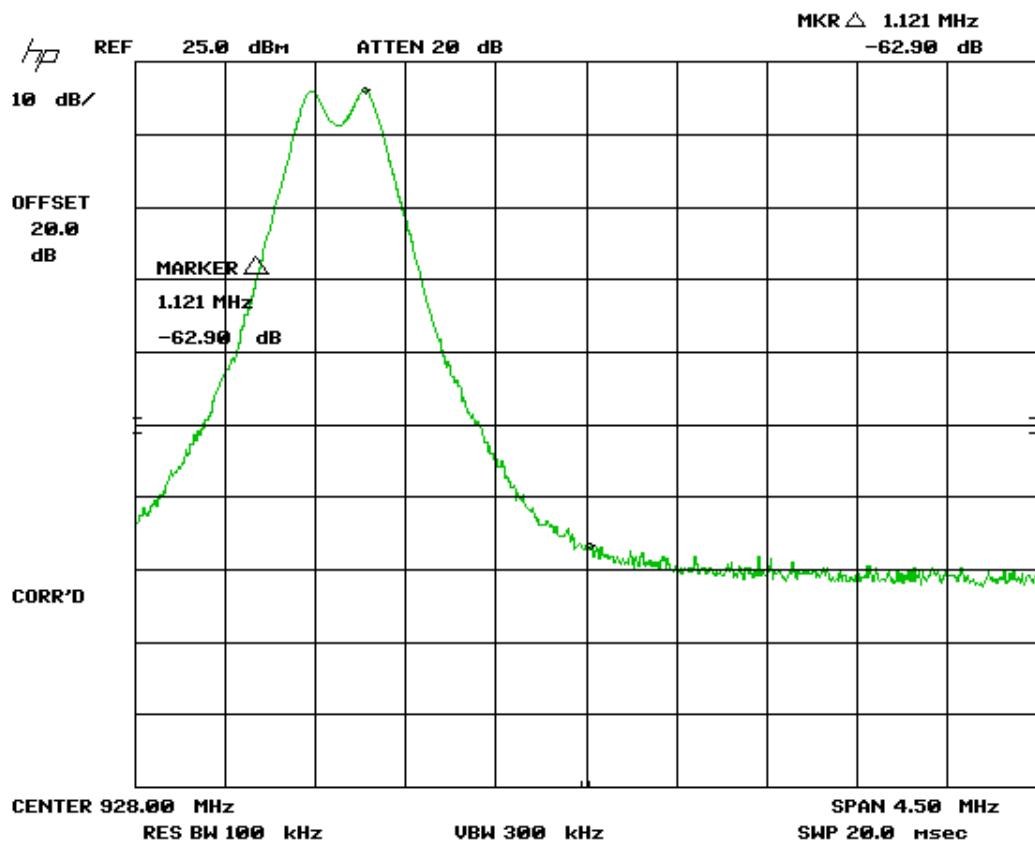


Figure 15 - Radiated Band Edge Compliance – High Channel

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

2.10 Unintentional Radiator, Radiated Emissions (CFR 15.109 (a))

The test data is provided herein to support the Verification requirement for digital devices. Radiated emissions coming from the EUT in a non-transmit state were evaluated from 30 MHz to 12.5 GHz per ANSI C63.4, Paragraph 8.

Measurements were made with the analyzer's resolution bandwidth set to 120 kHz for measurements made below 1 GHz and 1 MHz for measurements made above 1 GHz. The video bandwidth was set to three times the resolution bandwidth; 1 MHz RBW and 3 MHz VBW. The test data was maximized for magnitude by rotating the turn-table through 360 degrees and raising and lowering the receiving antenna between 1 to 4 meters in height as a part of the measurement procedure.

All measured signals were at least 4.8 dB below the specification limit. The results are shown in Table 7 below.

Table 7 – Unintentional Radiator, Radiated Emissions.

Unintentional Radiator, Radiated Emissions							
Test By: S.S.	Test: FCC Part 15.109, 15.209		Client: RFM/Cirronet				
	Project: 11-0005 Class: B		Model: DNT90				
Frequency (MHz)	Test Data (dBuV)	AF+CL-PA (dB)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	DETECTOR PK / QP
Tested from 30 MHz to 12.5 GHz							
47.9650	14.10	11.16	25.26	40.0	3m./VERT	14.7	PK
95.4100	18.00	11.66	29.66	43.5	3m./VERT	13.8	PK
106.6500	13.50	12.59	26.09	43.5	3m./VERT	17.4	PK
165.7500	13.70	16.26	29.96	43.5	3m./VERT	13.5	PK
221.6000	11.40	14.60	26.00	46.0	3m./VERT	20.0	PK
461.6000	8.30	21.35	29.65	46.0	3m./VERT	16.4	PK
101.4000	10.20	11.89	22.09	43.5	3m./HORZ	21.4	PK
168.5000	17.00	15.35	32.35	43.5	3m./HORZ	11.1	PK
226.2000	9.20	14.69	23.89	46.0	3m./HORZ	22.1	PK
207.2000	13.90	14.53	28.43	43.5	3m./HORZ	15.1	PK
2416.0000	44.80	-2.13	42.67	54.0	3m./VERT	11.3	PK
2416.0000	43.50	-2.20	41.30	54.0	3m./HORZ	12.7	PK

No other emissions detected within 20 dB of the FCC Part 15.109 limits

AF is antenna factor. CL is cable loss. PA is preamplifier gain

SAMPLE CALCULATION:

RESULTS: At 47.965 MHz: $= (14.10+11.16) = 25.26$ dBuV/m @ 3m

Margin = $(40-25.26) = 14.7$ dB

Test Date: January 26, 2010

Tested By Signature: Sina Sobhanian

Name: Sina Sobhanian

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

2.11 Unintentional Radiator Power Lines Conducted Emissions (CFR 15.107)

The test data provided herein is to support the Verification requirement for the digital apparatus. The power line conducted voltage measurements for Receiver and Digital Devices have been carried out in accordance with CFR 15.107 and ANSI C63.4, Paragraph 7, with a spectrum analyzer connected to an LISN and the EUT placed into an idle condition or a continuous mode of receive (non-transmitting). Please refer to the results as shown in Table 12 below.

Table 8 - Power Line Conducted Emissions Data, Class B

CONDUCTED EMISSIONS						
Tested By: S.S.	Specification Requirement: FCC Part 15, Para 15.107 Class B		Project No.: 11-0005	Manufacturer/Model: RFM/Cirronet model: DNT90		
Frequency (MHz)	Test Data (dBuV)	LISN+CL-PA (dB)	Corrected Results (dBuV)	Avg Limits (dBuV)	Margin (dB)	Detector
120 VAC, 60 Hz, Supply Line						
0.1500	49.50	1.63	51.13	56.0	4.9	PK
0.5269	37.30	0.42	37.72	46.0	8.3	PK
1.9920	33.70	0.29	33.99	46.0	12.0	PK
8.1750	35.40	0.26	35.66	50.0	14.3	PK
19.9800	33.90	0.26	34.16	50.0	15.8	PK
21.6400	46.10	0.26	46.36	50.0	3.6	QP
120 VAC, 60 Hz, Neutral Line						
0.2150	34.40	0.97	35.37	53.0	34.40	PK
0.5230	35.30	0.44	35.74	46.0	35.30	PK
2.1000	31.00	0.29	31.29	46.0	31.00	PK
8.0700	33.30	0.26	33.56	50.0	33.30	PK
20.0000	34.40	0.26	34.66	50.0	34.40	PK
21.6500	45.10	0.26	45.36	50.0	45.10	QP

Tested from 150 kHz to 30 MHz

SAMPLE CALCULATIONS: At 150. KHz = 49.5 + (1.63) = 51.13 dBuV

Test Date: January 25, 2010

Tested By Signature: Sina Sobhanian

Name: Sina Sobhanian

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

2.12 Measurement Uncertainty

2.12.1 Conducted Emissions Measurement Uncertainty:

Measurement Uncertainty (within a 95% confidence level) for this test is ± 2.8 dB.

The data listed in this test report has sufficient margin to negate the effects of uncertainty. This measurement unconditionally passes.

2.12.2 Radiated Emissions Measurement Uncertainty:

For a measurement distance of 3 m the measurement uncertainty (with a 95% confidence level) for this test using a Biconical Antenna (30 MHz to 200 MHz) is ± 5.3 dB. This value includes all elements of measurement.

The measurement uncertainty (with a 95% confidence level) for this test using a Log Periodic Antenna (200 MHz to 1000 MHz) is ± 5.1 dB.

The measurement uncertainty (with a 95% confidence level) for this test using a Horn Antenna is ± 5.1 dB.

The data listed in this test report does not have sufficient margin to negate the effects of uncertainty, (more than the measurement uncertainty value at 902.82 and 914.82 MHz). Therefore, this test is conditionally acceptable.

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

2.13 20 dB Bandwidth Measurement per CFR 15.247, (IC RSS 210, A8.1)

The EUT antenna port was connected to a spectrum analyzer having a 50 Ω input impedance. Measurements were performed similar to the method of FCC DA 00-705 for a bandwidth of 20 dB. The RBW was set to approximately 1/100 of the manufacturers claimed RBW and with the VBW \geq RBW. The results of this test are given in Table 9 and Figures 16 through 18.

Table 9 – 20dB Bandwidth Measurement

Frequency (MHz)	20 dB Bandwidth (KHz)
902	418
915	420
926	420

Test Date: February 22, 2011

Tested By

Signature:



Name: George Yang

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

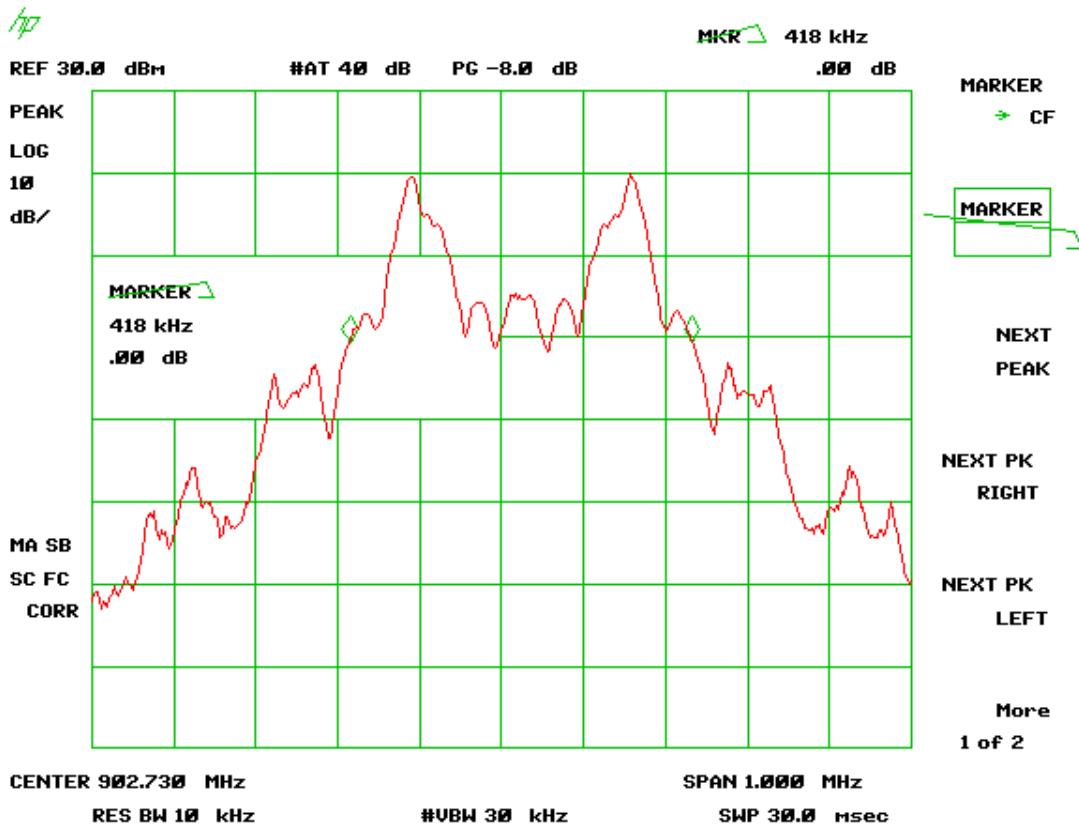


Figure 16 – Low Channel

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

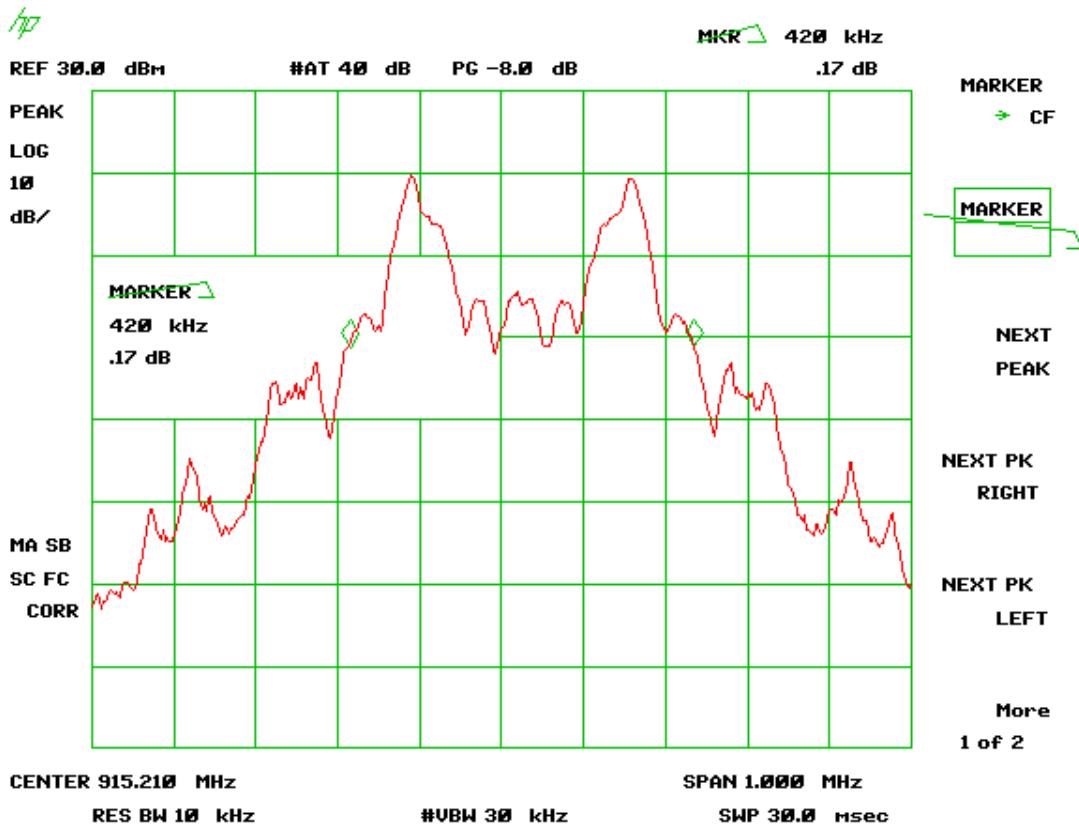


Figure 17 – Mid Channel

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

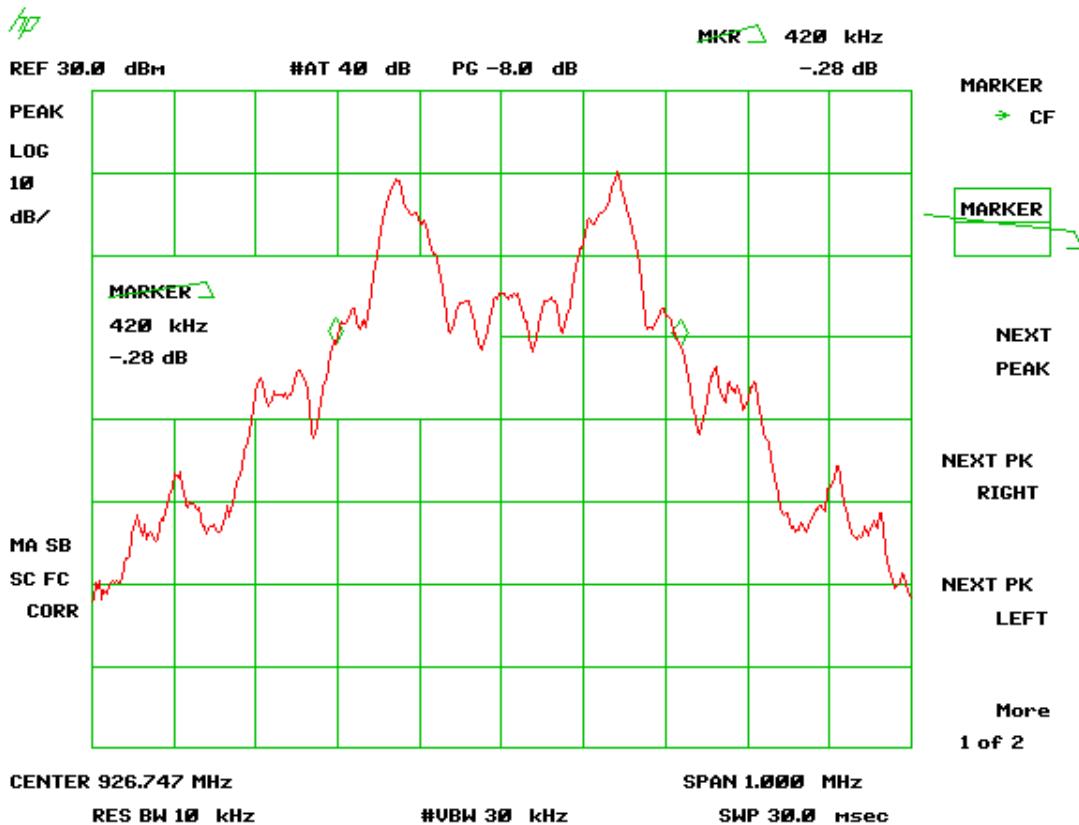


Figure 18 – High Channel

US Tech Test Report

FCC ID

Test Report Number:

Issue Date:

Customer:

Model:

FCC 15.247 B and C

HSW-DNT90

11-0005

January 28, 2011

RFM / Cirronet Inc.

DNT90C and DNT90P



Figure 19- Antenna 1 (Omni) Front View

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P

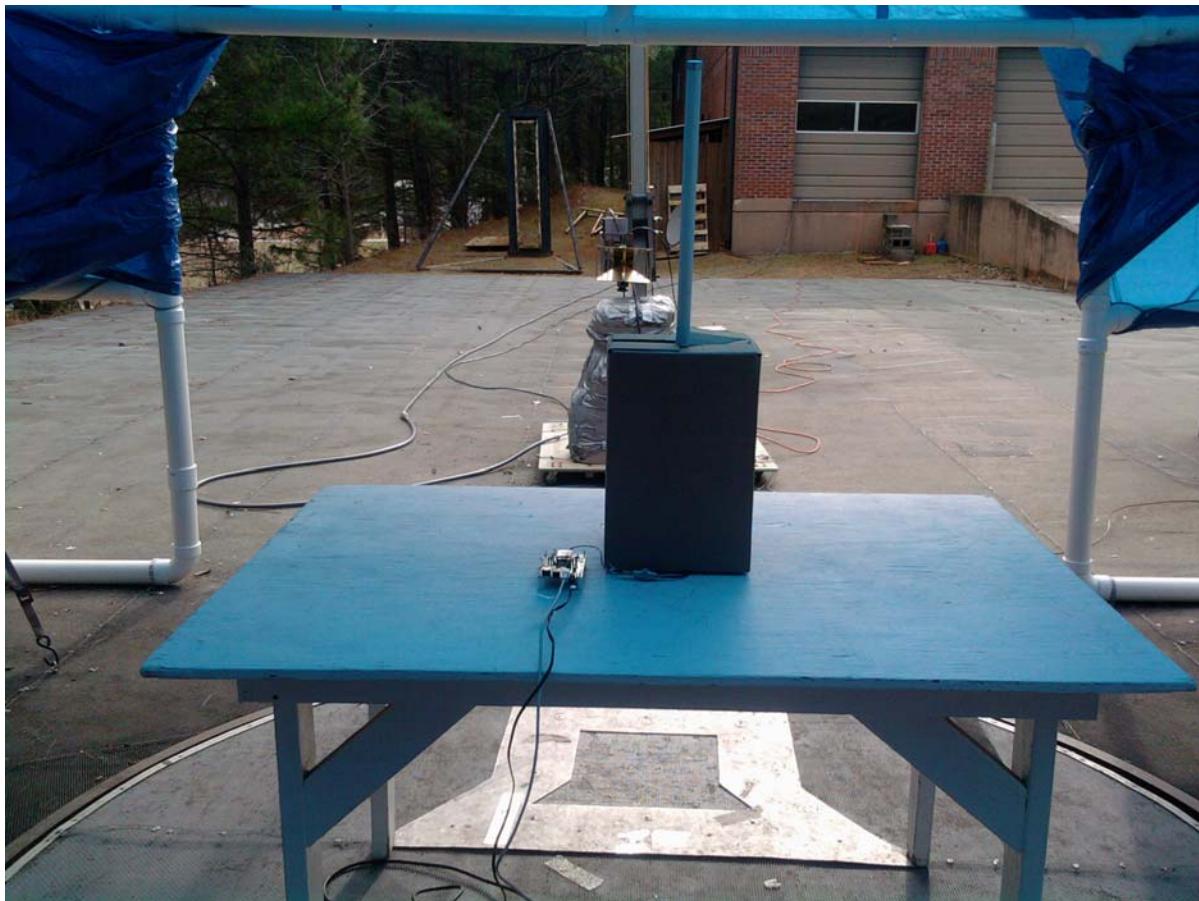


Figure 20– Antenna 1(Omni) Back View

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P



Figure 21– Antenna 2 (Yagi) Front View

US Tech Test Report
FCC ID
Test Report Number:
Issue Date:
Customer:
Model:

FCC 15.247 B and C
HSW-DNT90
11-0005
January 28, 2011
RFM / Cirronet Inc.
DNT90C and DNT90P



Figure 22– Antenna 2 (Yagi) Back View