

## **Certification Test Report**

**FCC ID: HSW-DNT900  
IC: 4492A-DNT900**

**FCC Rule Part: 15.247  
IC Radio Standards Specification: RSS-210**

**ACS Report Number: 12-0339.W04.1A**

Manufacturer: Cirronet Inc.  
Model(s): DNT900C, DNT900P

Test Begin Date: August 12, 2012  
Test End Date: August 12, 2012

Report Issue Date: August 22, 2012



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 200612-0

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Reviewed by:

A handwritten signature in blue ink, appearing to read "Kirby Munroe", is written over a horizontal line.

**Kirby Munroe  
Director, Wireless Certifications  
ACS, Inc.**

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

**This report contains 12 pages**

## TABLE OF CONTENTS

|          |                                                             |                                     |
|----------|-------------------------------------------------------------|-------------------------------------|
| <b>1</b> | <b>GENERAL .....</b>                                        | <b>3</b>                            |
| 1.1      | PURPOSE.....                                                | 3                                   |
| 1.2      | GENERAL.....                                                | 3                                   |
| 1.3      | TEST METHODOLOGY AND CONSIDERATIONS .....                   | 3                                   |
| <b>2</b> | <b>TEST FACILITIES.....</b>                                 | <b>4</b>                            |
| 2.1      | LOCATION .....                                              | 4                                   |
| 2.2      | LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS ..... | 4                                   |
| 2.3      | RADIATED EMISSIONS TEST SITE DESCRIPTION .....              | 5                                   |
| 2.3.1    | <i>Semi-Anechoic Chamber Test Site</i> .....                | 5                                   |
| 2.3.2    | <i>Open Area Tests Site (OATS)</i> .....                    | 6                                   |
| 2.4      | CONDUCTED EMISSIONS TEST SITE DESCRIPTION .....             | 7                                   |
| <b>3</b> | <b>APPLICABLE STANDARD REFERENCES.....</b>                  | <b>7</b>                            |
| <b>4</b> | <b>LIST OF TEST EQUIPMENT.....</b>                          | <b>8</b>                            |
| <b>5</b> | <b>SUPPORT EQUIPMENT .....</b>                              | <b>9</b>                            |
| <b>6</b> | <b>EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM .....</b>       | <b>ERROR! BOOKMARK NOT DEFINED.</b> |
| <b>7</b> | <b>SUMMARY OF TESTS.....</b>                                | <b>10</b>                           |
| 7.1      | ANTENNA REQUIREMENT – FCC: SECTION 15.203 .....             | 10                                  |
| 7.2      | RADIATED SPURIOUS EMISSIONS (RESTRICTED BANDS) .....        | 10                                  |
| 7.2.1    | <i>Measurement Procedure</i> .....                          | 10                                  |
| 7.2.2    | <i>Measurement Results</i> .....                            | 10                                  |
| 7.2.3    | <i>Sample Calculation:</i> .....                            | 11                                  |
| <b>8</b> | <b>CONCLUSION .....</b>                                     | <b>12</b>                           |

## **1 GENERAL**

### **1.1 Purpose**

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Industry Canada's Radio Standards Specification RSS-210 for Certification for a class II permissive change.

The purpose of this class II permissive change is to add a new antenna.

### **1.2 General**

The DNT900 series transceiver module is a low cost, high-power solution for point-to- I/O point and point-to-multipoint wireless systems in the 900 MHz ISM band. Two model variants of the DNT900 are available. Both model variants are electrically identical and differ only in the interface available for host integration. DNT900C radio modules are mounted by reflow soldering them to a host circuit board. DNT900P modules are mounted by plugging their pins into a set of mating connectors on the host circuit board.

Antenna Type/Gain: Printed Circuit Inverted F, 0 dBi maximum gain.

Manufacturer Information:

Cirronet, Inc.

3079 Premiere Parkway, Suite 140

Duluth, GA 30097

Test Sample Serial Number: 000B75

Test Sample Condition: The test samples were provided in good working order with no visible defects.

### **1.3 Test Methodology and Considerations**

DNT900 series modules achieve regulatory certification under FHSS rules at air data rates of 38.4, 115.2 and 200 kb/s. At 500 kb/s, the DNT900 series modules achieve regulatory certification under "digital modulation" or DTS rules. At 500 kb/s DNT900 series modules still employ frequency hopping to mitigate the effects of interference and multipath fading, but hop on fewer, more widely spaced frequencies than at lower data rates.

This report covers DTS operation for 500kb/s data rates only. A separate report will be issued covering the frequency hopping spread spectrum operation using 38.4, 115.2 and 200 kb/s data rates.

The EUT was tested for radiated emissions in multiple orientations.

## **2 TEST FACILITIES**

### **2.1 Location**

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions  
5015 B.U. Bowman Drive  
Buford, GA 30518  
Phone: (770) 831-8048  
Fax: (770) 831-8598

### **2.2 Laboratory Accreditations/Recognitions/Certifications**

ACS is accredited to ISO/IEC 17025 by the National Institute of Standards and Technology under their National Voluntary Laboratory Accreditation Program (NVLAP), Lab Code 200612-0. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, Industry Canada and the Japanese Voluntary Control Council for Interference by information technology equipment.

FCC Registration Number: 511277

Industry Canada Lab Code: IC 4175A-1

VCCI Member Number: 1831

- VCCI OATS Registration Number R-1526
- VCCI Conducted Emissions Site Registration Number: C-1608

## 2.3 Radiated Emissions Test Site Description

### 2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

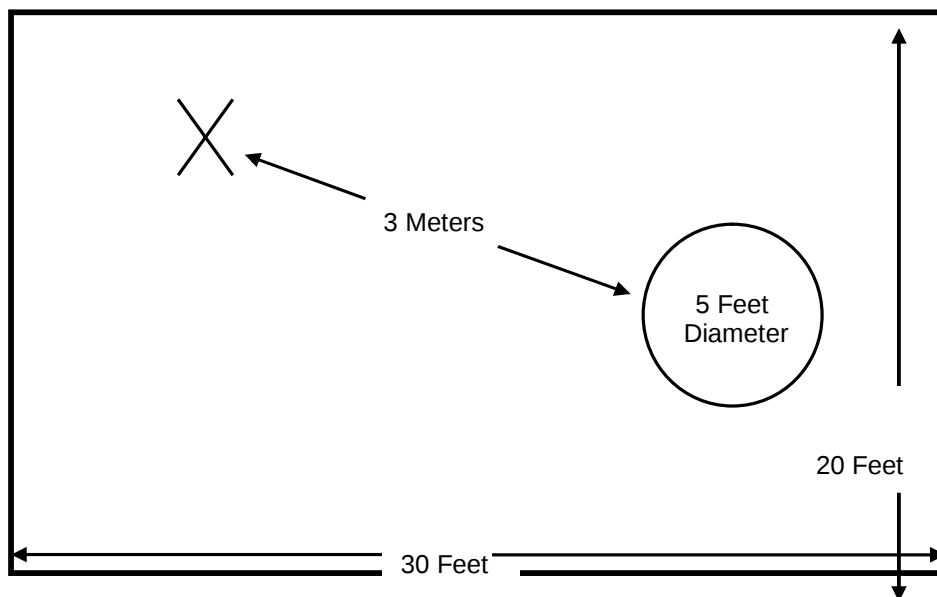


Figure 2.3-1: Semi-Anechoic Chamber Test Site

### 2.3.2 Open Area Tests Site (OATS)

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style re-enforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

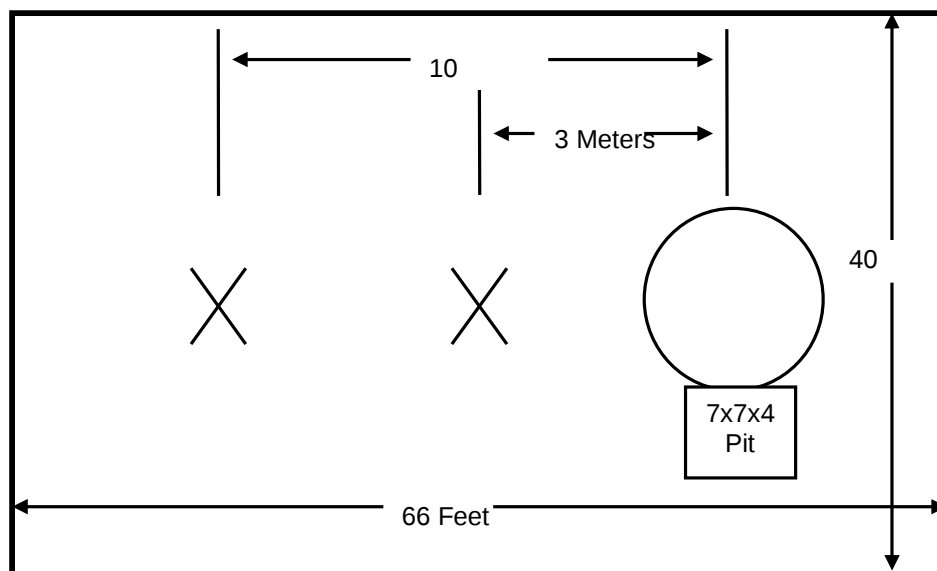


Figure 2.3-2: Open Area Test Site

## 2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal ground reference plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

The site is of sufficient size to test table top and floor standing equipment in accordance with section 6.1.4 of ANSI C63.4.

A diagram of the room is shown below in figure 4.1.3-1:

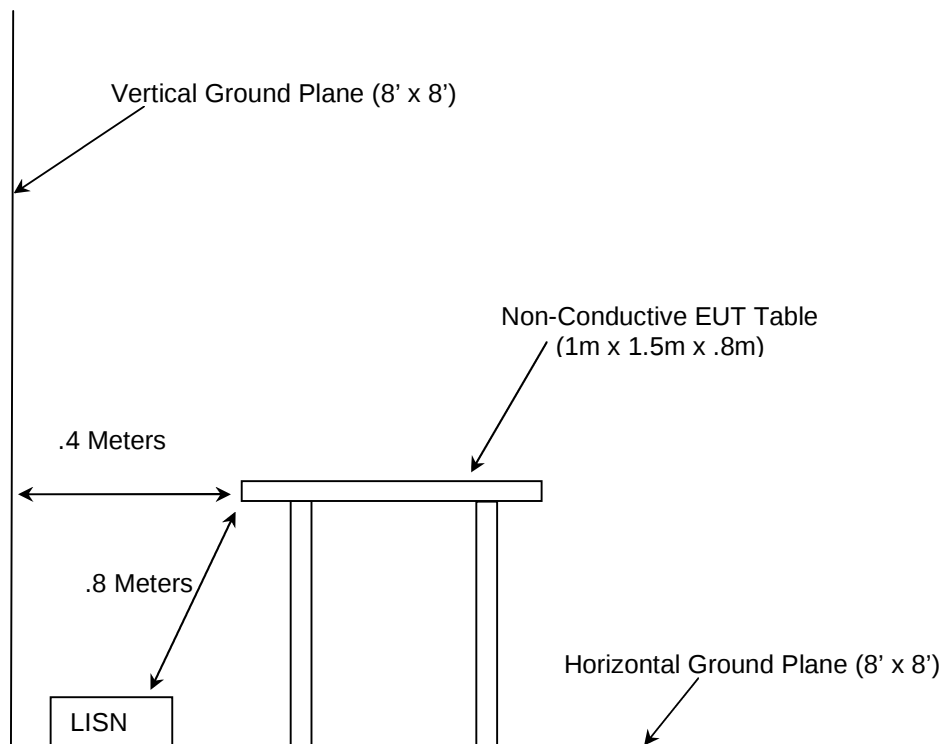


Figure 2.4-1: AC Mains Conducted EMI Site

## 3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9KHz to 40GHz
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2012
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2012
- ❖ Industry Canada Radio Standards Specification: RSS-210 - Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, Issue 8, Dec 2010
- ❖ Industry Canada Radio Standards Specification: RSS-GEN - General Requirements and Information for the Certification of Radiocommunication Equipment, Issue 3, Dec 2010.

#### 4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

**Table 4-1: Test Equipment**


| AssetID | Manufacturer          | Model #               | Equipment Type     | Serial #   | Last Calibration Date | Calibration Due Date |
|---------|-----------------------|-----------------------|--------------------|------------|-----------------------|----------------------|
| 1       | Rohde & Schwarz       | ESMI - Display        | Spectrum Analyzers | 833771/007 | 8/2/2012              | 8/2/2014             |
| 2       | Rohde & Schwarz       | ESMI-Receiver         | Spectrum Analyzers | 839587/003 | 8/2/2012              | 8/2/2014             |
| 30      | Spectrum Technologies | DRH-0118              | Antennas           | 970102     | 4/27/2011             | 4/27/2013            |
| 40      | EMCO                  | 3104                  | Antennas           | 3211       | 2/11/2011             | 2/11/2013            |
| 73      | Agilent               | 8447D                 | Amplifiers         | 2727A05624 | 9/30/2011             | 9/30/2012            |
| 167     | ACS                   | Chamber EMI Cable Set | Cable Set          | 167        | 12/21/2011            | 12/21/2012           |
| 291     | Florida RF Cables     | SMRE-200W-12.0-SMRE   | Cables             | None       | 12/2/2011             | 12/2/2012            |
| 292     | Florida RF Cables     | SMR-290AW-480.0-SMR   | Cables             | None       | 4/2/2012              | 4/2/2013             |
| 331     | Microwave Circuits    | H1G513G1              | Filters            | 31417      | 7/2/2012              | 7/2/2013             |
| 338     | Hewlett Packard       | 8449B                 | Amplifiers         | 3008A01111 | 8/2/2012              | 8/2/2013             |
| 412     | Electro Metrics       | LPA-25                | Antennas           | 1241       | 7/27/2012             | 7/27/2014            |
| 422     | Florida RF            | SMS-200AW-72.0-SMR    | Cables             | 805        | 12/2/2011             | 12/2/2012            |

## 5 SUPPORT EQUIPMENT

**Table 5-1: Support Equipment**

| Item | Equipment Type      | Manufacturer  | Model Number              | Serial Number |
|------|---------------------|---------------|---------------------------|---------------|
| 1    | Evaluation Board    | RFM           | Remote Radio Mother Board | N/A           |
| 2    | Communication Box   | N/A           | N/A                       | N/A           |
| 3    | DC Wall Wart        | GlobTek, Inc. | GT-41052-1509             | N/A           |
| 4    | Laptop Computer     | IBM           | 2648-PU5                  | 78-AVPNZ      |
| 5    | Laptop Power Supply | IBM           | 02K7006                   | J15JL58261J   |

## 6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

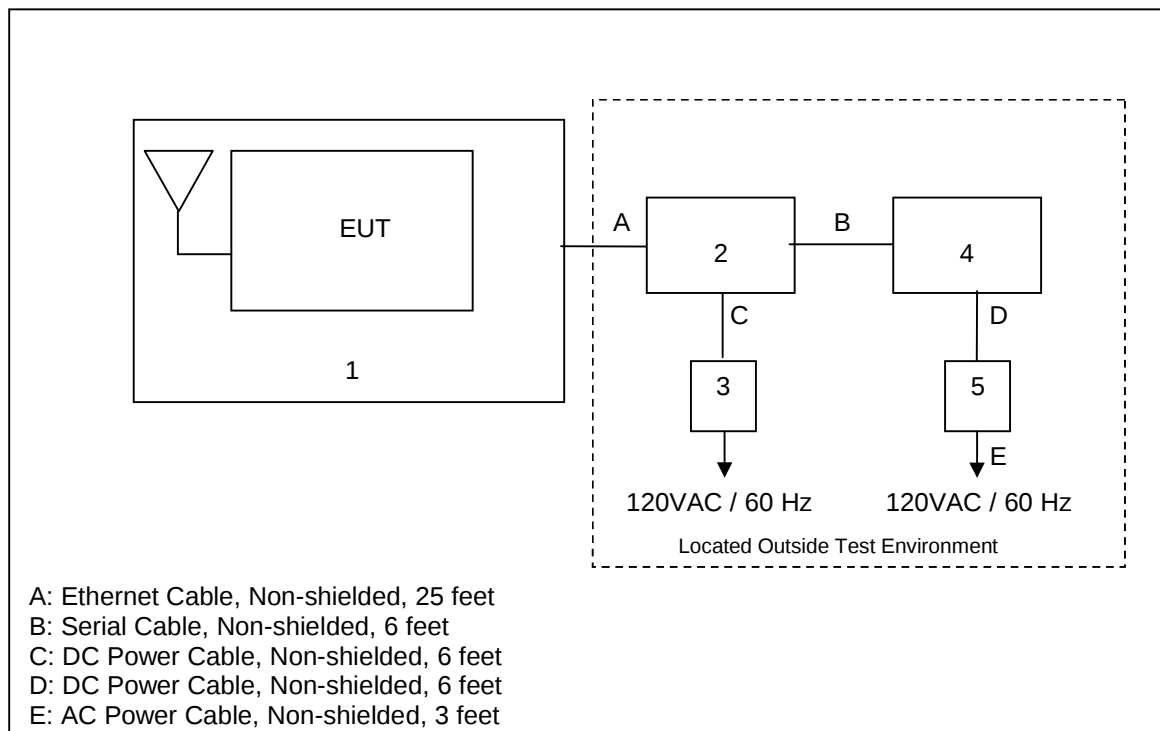**Figure 6-1: Test Setup Block Diagram**

## 7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

### 7.1 Antenna Requirement – FCC: Section 15.203

The antenna is PCB Inverted F type antenna with a maximum gain of 0 dBi. The antenna coupling is U.FL.

### 7.2 Radiated Spurious Emissions (Restricted Bands)

#### 7.2.1 Measurement Procedure

Radiated emissions tests were made over the frequency range of 30MHz to 10 GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000MHz, peak and average measurements were made with RBW and VBW of 1 MHz and 3 MHz respectively.

Each emission found to be in a restricted band was compared to the applicable radiated emission limits.

#### 7.2.2 Measurement Results

Radiated spurious emissions found in the band of 30MHz to 10GHz are reported in Table 7.2.2-1 to 7.2.2-3 below.

**Table 7.2.2-1: Radiated Spurious Emissions Tabulated Data – X-Position**

| Frequency<br>(MHz) | Level<br>(dBuV) |         | Antenna<br>Polarity<br>(H/V) | Correction<br>Factors<br>(dB) | Corrected Level<br>(dBuV/m) |         | Limit<br>(dBuV/m) |         | Margin<br>(dB) |         |
|--------------------|-----------------|---------|------------------------------|-------------------------------|-----------------------------|---------|-------------------|---------|----------------|---------|
|                    | pk              | Qpk/Avg |                              |                               | pk                          | Qpk/Avg | pk                | Qpk/Avg | pk             | Qpk/Avg |
| Low Channel        |                 |         |                              |                               |                             |         |                   |         |                |         |
| 1163.1             | 63.14           | 56.62   | H                            | -12.03                        | 51.11                       | 44.59   | 74.0              | 54.0    | 22.9           | 9.4     |
| 1163.1             | 57.27           | 50.72   | V                            | -12.03                        | 45.24                       | 38.69   | 74.0              | 54.0    | 28.8           | 15.3    |
| 1189.2             | 64.54           | 56.72   | H                            | -11.84                        | 52.70                       | 44.88   | 74.0              | 54.0    | 21.3           | 9.1     |
| 1189.2             | 60.16           | 51.94   | V                            | -11.84                        | 48.32                       | 40.10   | 74.0              | 54.0    | 25.7           | 13.9    |
| Middle Channel     |                 |         |                              |                               |                             |         |                   |         |                |         |
| 1176.1             | 67.24           | 59.41   | H                            | -11.93                        | 55.31                       | 47.48   | 74.0              | 54.0    | 18.7           | 6.5     |
| 1176.1             | 61.36           | 53.75   | V                            | -11.93                        | 49.43                       | 41.82   | 74.0              | 54.0    | 24.6           | 12.2    |
| High Channel       |                 |         |                              |                               |                             |         |                   |         |                |         |
| 1186.04            | 66.22           | 59.74   | H                            | -11.86                        | 54.36                       | 47.88   | 74.0              | 54.0    | 19.6           | 6.1     |
| 1186.04            | 62.19           | 55.30   | V                            | -11.86                        | 50.33                       | 43.44   | 74.0              | 54.0    | 23.7           | 10.6    |
| 1004.35            | 65.46           | 53.93   | H                            | -13.19                        | 52.27                       | 40.74   | 74.0              | 54.0    | 21.7           | 13.3    |
| 1004.35            | 56.21           | 44.91   | V                            | -13.19                        | 43.02                       | 31.72   | 74.0              | 54.0    | 31.0           | 22.3    |

**Table 7.2.2-2: Radiated Spurious Emissions Tabulated Data – Y-Position**

| Frequency<br>(MHz) | Level<br>(dBuV) |         | Antenna<br>Polarity<br>(H/V) | Correction<br>Factors<br>(dB) | Corrected Level<br>(dBuV/m) |         | Limit<br>(dBuV/m) |         | Margin<br>(dB) |         |
|--------------------|-----------------|---------|------------------------------|-------------------------------|-----------------------------|---------|-------------------|---------|----------------|---------|
|                    | pk              | Qpk/Avg |                              |                               | pk                          | Qpk/Avg | pk                | Qpk/Avg | pk             | Qpk/Avg |
| Low Channel        |                 |         |                              |                               |                             |         |                   |         |                |         |
| 2709.75            | 49.39           | 38.18   | H                            | 1.78                          | 51.17                       | 39.96   | 74.0              | 54.0    | 22.8           | 14.0    |
| 2709.75            | 49.57           | 39.35   | V                            | 1.78                          | 51.35                       | 41.13   | 74.0              | 54.0    | 22.6           | 12.9    |
| Middle Channel     |                 |         |                              |                               |                             |         |                   |         |                |         |
| 2745.75            | 48.86           | 38.43   | H                            | -3.70                         | 45.16                       | 34.73   | 74.0              | 54.0    | 28.8           | 19.3    |
| High Channel       |                 |         |                              |                               |                             |         |                   |         |                |         |
| 2778.75            | 48.67           | 37.70   | H                            | -3.59                         | 45.08                       | 34.11   | 74.0              | 54.0    | 28.9           | 19.9    |

**Table 7.2.2-3: Radiated Spurious Emissions Tabulated Data – Z-Position**

| Frequency<br>(MHz)                                          | Level<br>(dBuV) |         | Antenna<br>Polarity<br>(H/V) | Correction<br>Factors<br>(dB) | Corrected Level<br>(dBuV/m) |         | Limit<br>(dBuV/m) |         | Margin<br>(dB) |         |
|-------------------------------------------------------------|-----------------|---------|------------------------------|-------------------------------|-----------------------------|---------|-------------------|---------|----------------|---------|
|                                                             | pk              | Qpk/Avg |                              |                               | pk                          | Qpk/Avg | pk                | Qpk/Avg | pk             | Qpk/Avg |
| Low Channel                                                 |                 |         |                              |                               |                             |         |                   |         |                |         |
| 2709.75                                                     | 48.68           | 38.23   | V                            | -3.83                         | 44.85                       | 34.40   | 74.0              | 54.0    | 29.1           | 19.6    |
| Middle Channel                                              |                 |         |                              |                               |                             |         |                   |         |                |         |
| All radiated spurious emissions were below the noise floor. |                 |         |                              |                               |                             |         |                   |         |                |         |
| High Channel                                                |                 |         |                              |                               |                             |         |                   |         |                |         |
| All radiated spurious emissions were below the noise floor. |                 |         |                              |                               |                             |         |                   |         |                |         |

**7.2.3 Sample Calculation:**

$$R_C = R_U + CF_T$$

Where:

- $CF_T$  = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)  
 $R_U$  = Uncorrected Reading  
 $R_C$  = Corrected Level  
 AF = Antenna Factor  
 CA = Cable Attenuation  
 AG = Amplifier Gain  
 DC = Duty Cycle Correction Factor

**Example Calculation: Peak – X Position**Corrected Level:  $63.14 + -12.03 = 51.11\text{dBuV/m}$ Margin:  $74\text{dBuV/m} - 51.11\text{dBuV/m} = 22.9\text{dB}$ **Example Calculation: Average – X Position**Corrected Level:  $56.62 + -12.03 - 0 = 44.59\text{dBuV}$ Margin:  $54\text{dBuV} - 44.59\text{dBuV} = 9.4\text{dB}$

**8 CONCLUSION**

In the opinion of ACS, Inc. DNT900C and DNT900P, manufactured by Cirronet Inc. meets the requirements of FCC Part 15 subpart C and Industry Canada's Radio Standards Specification RSS-210 as applicable to the class II permissive change.

**END REPORT**