

TEST REPORT

Reference No..... : WTS17S0681499E
FCC ID : HSXBU01C
Applicant..... : The Whistler Group
Address..... : 168 Ayer Rd, Littleton, Massachusetts 01460, United States
Manufacturer : DongGuan Protronic Electronics Ltd.
Address..... : Protronic Industrial Park Xiangxi Village, Shipai Town, Dongguan,
Guangdong, P.R.China
Product Name..... : BACK-UP CAMERA
Product Marketing Name : Camera
Model No..... : WBU-900
Hardware Version : WBU-900C
Identification Number
Standards..... : FCC CFR47 Part 15 Section 15.247:2016
Date of Receipt sample : Jun. 08, 2017
Date of Test : Jun. 09 - 26, 2017
Date of Issue..... : Jul. 04, 2017
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,
Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Tested by:

Robin Zhou

Robin Zhou / Test Engineer

Approved by:



Philip Zhong

Philip Zhong / Manager

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 REPORT REVISION HISTORY	4
4 GENERAL INFORMATION.....	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST	5
4.4 TEST MODE	6
4.5 TEST FACILITY	6
5 EQUIPMENT USED DURING TEST	7
5.1 EQUIPMENTS LIST	7
5.2 MEASUREMENT UNCERTAINTY	9
5.3 TEST EQUIPMENT CALIBRATION	9
6 TEST SUMMARY	10
7 CONDUCTED EMISSIONS.....	11
7.1 E.U.T. OPERATION	11
7.2 EUT SETUP	11
7.3 MEASUREMENT DESCRIPTION	12
7.4 CONDUCTED EMISSION TEST RESULT	12
8 RADIATED SPURIOUS EMISSIONS.....	14
8.1 EUT OPERATION.....	14
8.2 TEST SETUP	15
8.3 SPECTRUM ANALYZER SETUP	16
8.4 TEST PROCEDURE	17
8.5 SUMMARY OF TEST RESULTS	18
9 BAND EDGE MEASUREMENT	21
9.1 TEST PROCEDURE	21
9.2 TEST RESULT	22
10 BANDWIDTH MEASUREMENT.....	24
10.1 TEST PROCEDURE.....	24
10.2 TEST RESULT	24
11 MAXIMUM PEAK OUTPUT POWER	26
11.1 TEST PROCEDURE.....	26
11.2 TEST RESULT	26
12 HOPPING CHANNEL SEPARATION	29
12.1 TEST PROCEDURE.....	29
12.2 TEST RESULT	29
13 NUMBER OF HOPPING FREQUENCY.....	32
13.1 TEST PROCEDURE.....	32
13.2 TEST RESULT	32
14 DWELL TIME	33
14.1 TEST PROCEDURE.....	33
14.2 TEST RESULT	33

15	ANTENNA REQUIREMENT	36
16	RF EXPOSURE.....	37
16.1	REQUIREMENTS.....	37
16.2	THE PROCEDURES / LIMIT	37
16.3	MPE CALCULATION METHOD	38
17	PHOTOGRAPHS – MODEL WBU-900C TEST SETUP	39
17.1	PHOTOGRAPH – RADIATION SPURIOUS EMISSION TEST SETUP.....	39
17.2	PHOTOGRAPH – CONDUCTED EMISSION TEST SETUP.....	41
18	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	42
18.1	MODEL WBU-900C-EXTERNAL PHOTOS.....	42
18.2	MODEL WBU-900C-INTERNAL PHOTOS	47

3 Report Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS17S0681499E	Jun. 08, 2017	Jun. 09 - 26, 2017	Jun. 28, 2017	Original	-	Replaced
WTS17S0681499E	Jun. 08, 2017	Jun. 09 - 26, 2017	Jul. 04, 2017	Revision1	Added Conducted Emission Equipment List	Valid

4 General Information

4.1 General Description of E.U.T.

Product Name:	BACK-UP CAMERA
Product Marketing Name:	Camera
Model No.:	WBU-900
Hardware Version Identification Number:	WBU-900C
Model Description:	N/A
Frequency Range:	2409.75MHz ~ 2472.75MHz, 19 channels in total
Type of Modulation:	GFSK
The lowest oscillator:	12MHz
Antenna installation:	internal permanent antenna
Antenna Gain:	2 dBi

4.2 Details of E.U.T.

Technical Data:	DC 3.7V 2000mAh 7.4Wh by Li-Po battery, Charging: DC 5V by USB from PC
-----------------	---

4.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2409.75	1	2413.125	2	2416.5	3	2419.875
4	2423.25	5	2426.625	6	2430	7	2433.375
8	2436.75	9	2442.375	10	2445.75	11	2449.125
12	2452.5	13	2455.875	14	2459.25	15	2462.625
16	2466	17	2469.375	18	2472.75	19	-

4.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting	2409.75MHz	2442.375MHz	2472.75MHz

4.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A-1**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration 7760A-1, October 15, 2015

- **FCC Test Site– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.15,2016	Sep.14,2017
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.15,2016	Sep.14,2017
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.15,2016	Sep.14,2017
4.	Cable	LARGE	RF300	-	Sep.15,2016	Sep.14,2017
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	Apr. 29, 2017	Apr. 28, 2018
2	Amplifier	Agilent	8447D	2944A10178	Jan. 12, 2017	Jan. 11, 2018
3	Active Loop Antenna	Beijing Dazhi	ZN30900A	0703	Oct. 17, 2016	Oct. 16, 2017
4	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr. 07, 2017	Apr. 06, 2018
5	SHF-EHF Horn, 15-40GHz	SCHWARZBECK	BBHA 9170	BBHA9170582	Aug. 13, 2016	Aug. 12, 2017
6	Broadband Preamplifier	SCHWARZBECK	BBV 9719	18-26.5GHz	Aug. 13, 2016	Aug. 12, 2017
7	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.12, 2016	Sep.11, 2017
8	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr. 07, 2017	Apr. 06, 2018
9	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Apr. 07, 2017	Apr. 06, 2018
10	Coaxial Cable (above 1GHz)	Top	1GHz-18GHz	EW02014-7	Apr. 07, 2017	Apr. 06, 2018
11	Test Receiver	R&S	ESCI	101296	Apr. 06, 2017	Apr. 05, 2018
12	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Apr. 07, 2017	Apr. 06, 2018
13	Amplifier	ANRITSU	MH648A	M43381	Apr. 07, 2017	Apr. 06, 2018
14	Cable	HUBER+SUHNER	CBL2	525178	Apr. 07, 2017	Apr. 06, 2018
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.15,2016	Sep.14,2017

2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.15,2016	Sep.14,2017
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.15,2016	Sep.14,2017

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by GUANG ZHOU GRG METROLOGY & TEST CO., LTD. address is No.163, Pingyun Rd. West of Huangpu Ave, Tianhe District, Guangzhou, Guangdong, China.

6 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	C
Band edge	15.247(d) 15.205(a)	C
Conduct Emission	15.207	C
Bandwidth	15.247(a)(1)	C
Maximum Peak Output Power	15.247(b)(1)	C
Frequency Separation	15.247(a)(1)	C
Number of Hopping Frequency	15.247(a)(1)(iii)	C
Dwell time	15.247(a)(1)(iii)	C
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	C
Antenna Requirement	15.203	C
Note: C=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable		

7 Conducted Emissions

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013, ANSI C63.4:2014
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

7.1 E.U.T. Operation

Operating Environment :


Temperature:	25.5 °C
Humidity:	51 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in Charging + Transmitting mode, the test data were shown in the report.

7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

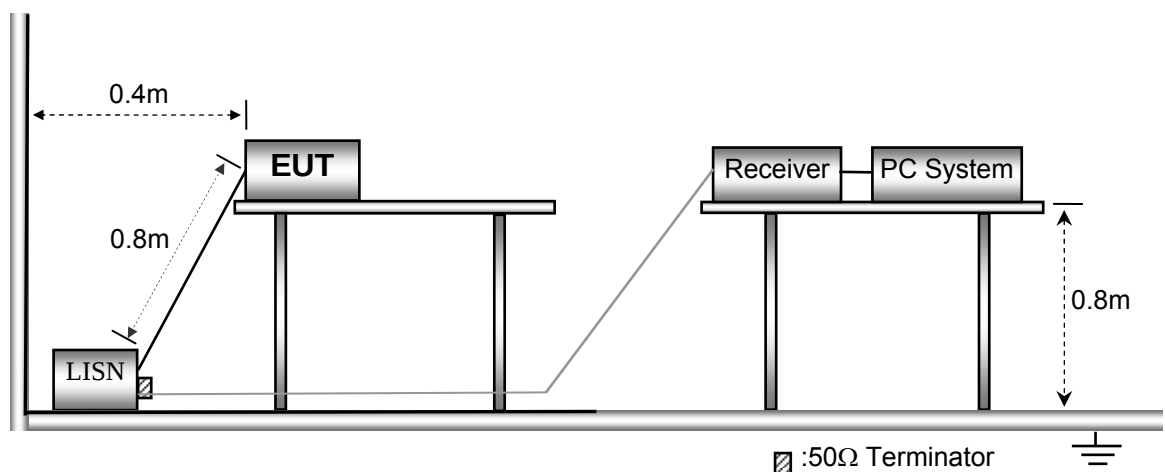


7.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


7.4 Conducted Emission Test Result

Live line:

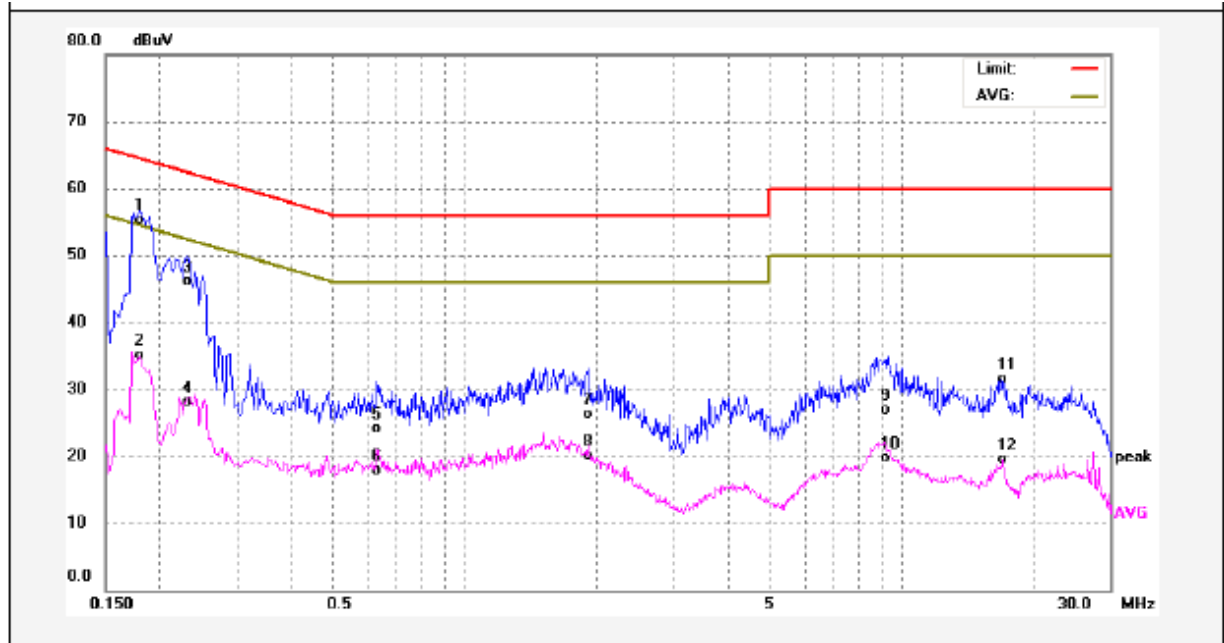

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1796	45.39	9.88	55.27	64.50	-9.23	QP	
2	0.1796	25.13	9.88	35.01	54.50	-19.49	AVG	
3	0.2300	36.04	9.97	46.01	62.45	-16.44	QP	
4	0.2300	18.10	9.97	28.07	52.45	-24.38	AVG	
5	0.6300	14.07	10.08	24.15	56.00	-31.85	QP	
6	0.6300	7.76	10.08	17.84	46.00	-28.16	AVG	
7	1.9140	16.08	10.19	26.27	56.00	-29.73	QP	
8	1.9140	9.98	10.19	20.17	46.00	-25.83	AVG	
9	9.3139	16.49	10.35	26.84	60.00	-33.16	QP	
10	9.3139	9.32	10.35	19.67	50.00	-30.33	AVG	
11	16.9100	21.12	10.41	31.53	60.00	-28.47	QP	
12	17.0380	9.12	10.42	19.54	50.00	-30.46	AVG	

Neutral line:

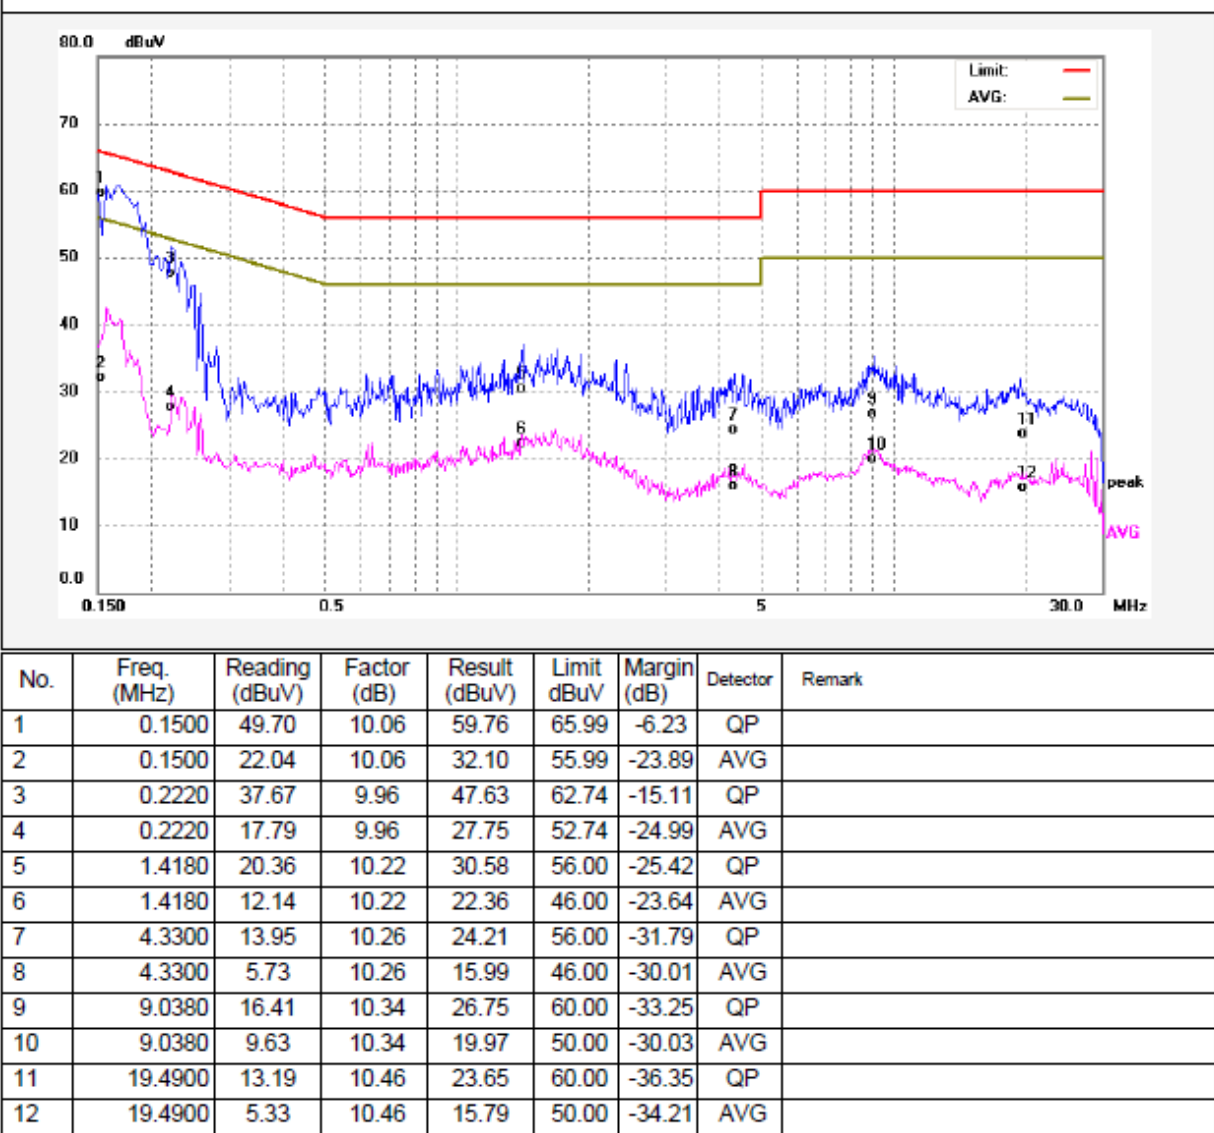

8 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013&ANSI C63.4:2014

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Distance	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 51.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in Charging + Transmitting mode, the test data were shown in the report.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10:2013.


The test setup for emission measurement below 30MHz.

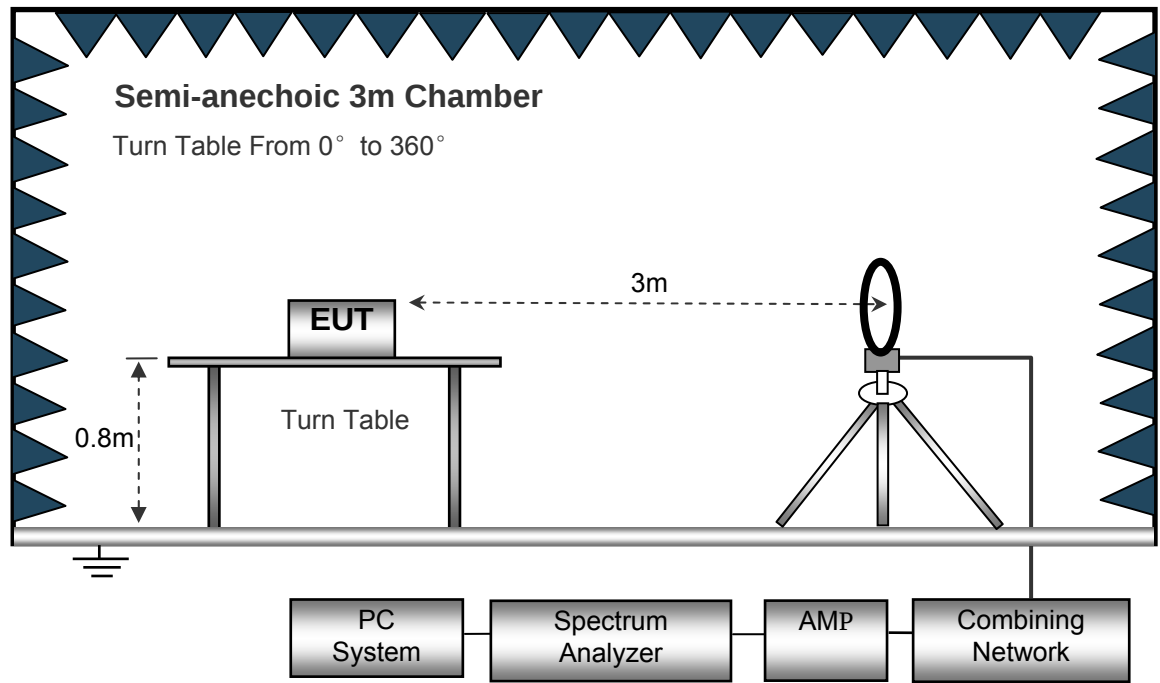

The test setup for emission measurement from 30 MHz to 1 GHz.

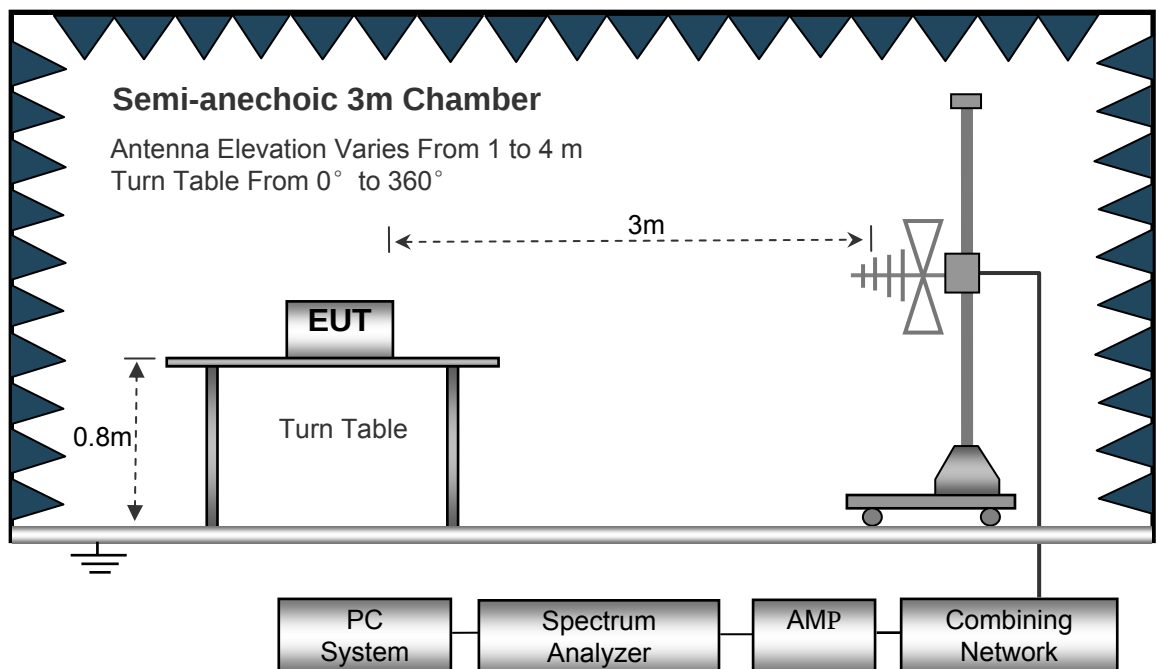

The test setup for emission measurement above 1 GHz.

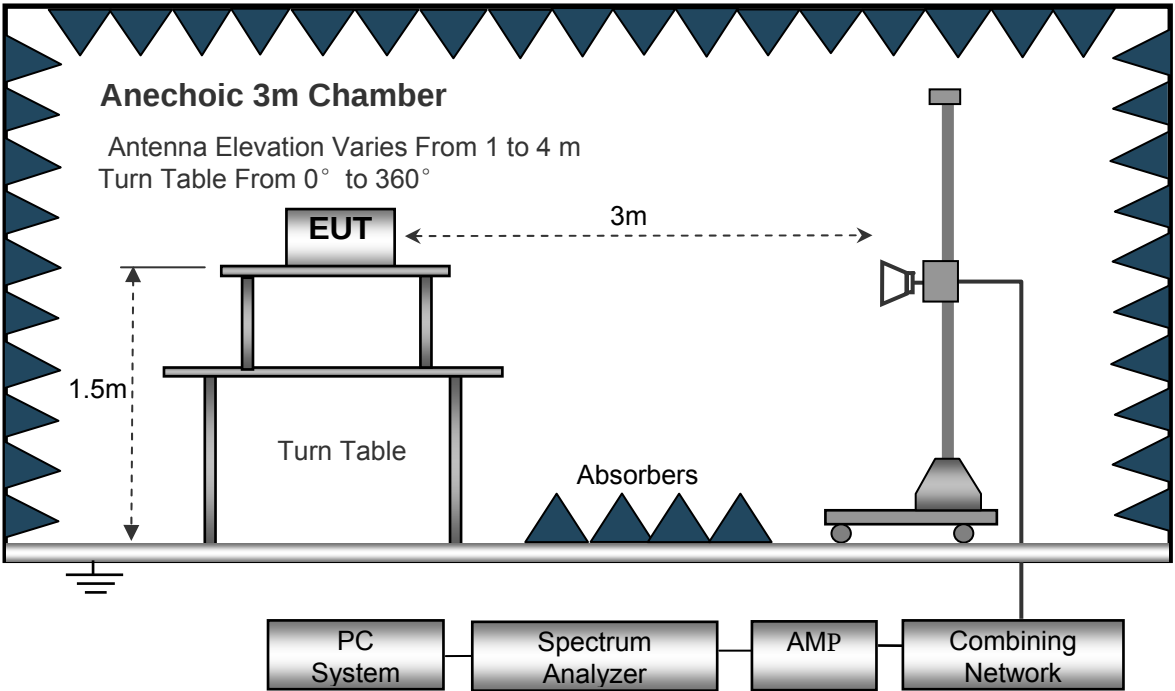

8.3 Spectrum Analyzer Setup

- Below 30MHz
- Sweep Speed Auto
 - IF Bandwidth.....10kHz
 - Video Bandwidth.....10kHz
 - Resolution Bandwidth.....10kHz
- 30MHz ~ 1GHz
- Sweep Speed Auto
 - DetectorPK
 - Resolution Bandwidth.....100kHz
 - Video Bandwidth.....300kHz
- Above 1GHz
- Sweep Speed Auto
 - DetectorPK
 - Resolution Bandwidth.....1MHz
 - Video Bandwidth.....3MHz
 - DetectorAve.
 - Resolution Bandwidth.....1MHz
 - Video Bandwidth.....10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable, which is above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

8.5 Summary of Test Results

Test Frequency: 9KHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Low Channel									
252.63	36.23	QP	355	1.5	H	-13.35	22.88	46.00	-23.12
252.63	41.78	QP	339	1.5	V	-13.35	28.43	46.00	-17.57
4819.50	45.63	PK	94	1.3	V	-1.06	44.57	74.00	-29.43
4819.50	41.77	Ave	94	1.3	V	-1.06	40.71	54.00	-13.29
7229.25	42.61	PK	196	1.5	H	1.33	43.94	74.00	-30.06
7229.25	35.22	Ave	196	1.5	H	1.33	36.55	54.00	-17.45
2343.31	46.75	PK	117	1.3	V	-13.19	33.56	74.00	-40.44
2343.31	38.96	Ave	117	1.3	V	-13.19	25.77	54.00	-28.23
2377.57	44.74	PK	342	1.2	H	-13.14	31.60	74.00	-42.40
2377.57	36.93	Ave	342	1.2	H	-13.14	23.79	54.00	-30.21
2492.14	44.99	PK	10	1.8	V	-13.08	31.91	74.00	-42.09
2492.14	37.20	Ave	10	1.8	V	-13.08	24.12	54.00	-29.88

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Middle Channel									
252.63	37.09	QP	92	1.8	H	-13.35	23.74	46.00	-22.26
252.63	42.45	QP	208	1.4	V	-13.35	29.10	46.00	-16.90
4884.75	46.20	PK	330	1.1	V	-0.62	45.58	74.00	-28.42
4884.75	42.23	Ave	330	1.1	V	-0.62	41.61	54.00	-12.39
7327.13	38.9	PK	25	1.7	H	2.21	41.11	74.00	-32.89
7327.13	34.56	Ave	25	1.7	H	2.21	36.77	54.00	-17.23
2327.91	45.31	PK	79	1.6	V	-13.19	32.12	74.00	-41.88
2327.91	37.53	Ave	79	1.6	V	-13.19	24.34	54.00	-29.66
2389.05	44.93	PK	73	1.6	H	-13.14	31.79	74.00	-42.21
2389.05	37.53	Ave	73	1.6	H	-13.14	24.39	54.00	-29.61
2497.48	42.45	PK	292	1.8	V	-13.08	29.37	74.00	-44.63
2497.48	36.49	Ave	292	1.8	V	-13.08	23.41	54.00	-30.59

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK High Channel									
252.63	38.22	QP	96	1.3	H	-13.35	24.87	46.00	-21.13
252.63	42.56	QP	219	1.7	V	-13.35	29.21	46.00	-16.79
4945.50	43.89	PK	5	1.5	V	-0.24	43.65	74.00	-30.35
4945.50	40.39	Ave	5	1.5	V	-0.24	40.15	54.00	-13.85
7418.25	39.26	PK	53	1.1	H	2.84	42.10	74.00	-31.90
7418.25	36.23	Ave	53	1.1	H	2.84	39.07	54.00	-14.93
2347.15	46.97	PK	170	1.1	V	-13.19	33.78	74.00	-40.22
2347.15	37.58	Ave	170	1.1	V	-13.19	24.39	54.00	-29.61
2368.54	43.69	PK	246	1.1	H	-13.14	30.55	74.00	-43.45
2368.54	37.63	Ave	246	1.1	H	-13.14	24.49	54.00	-29.51
2496.62	42.28	PK	348	1.4	V	-13.08	29.20	74.00	-44.80
2496.62	38.37	Ave	348	1.4	V	-13.08	25.29	54.00	-28.71

Test Frequency: Above 18GHz

The measurements were more than 20 dB below the limit and not reported

9 Band Edge Measurement



Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting and Hopping



9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyser: RBW = 100 kHz, VBW = 300 kHz, Sweep = auto
Detector function = peak, Trace = max hold

9.2 Test Result

Test plots

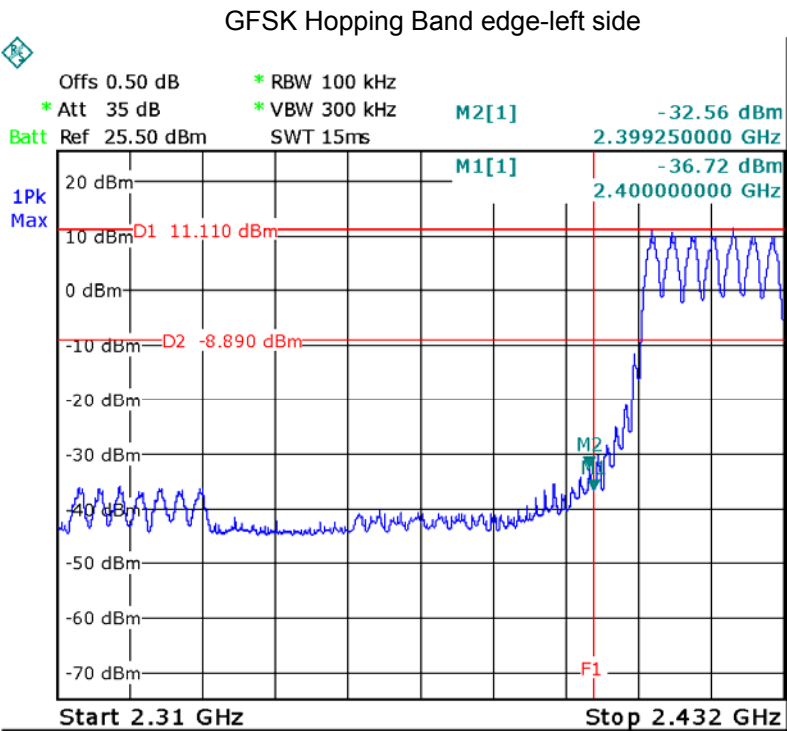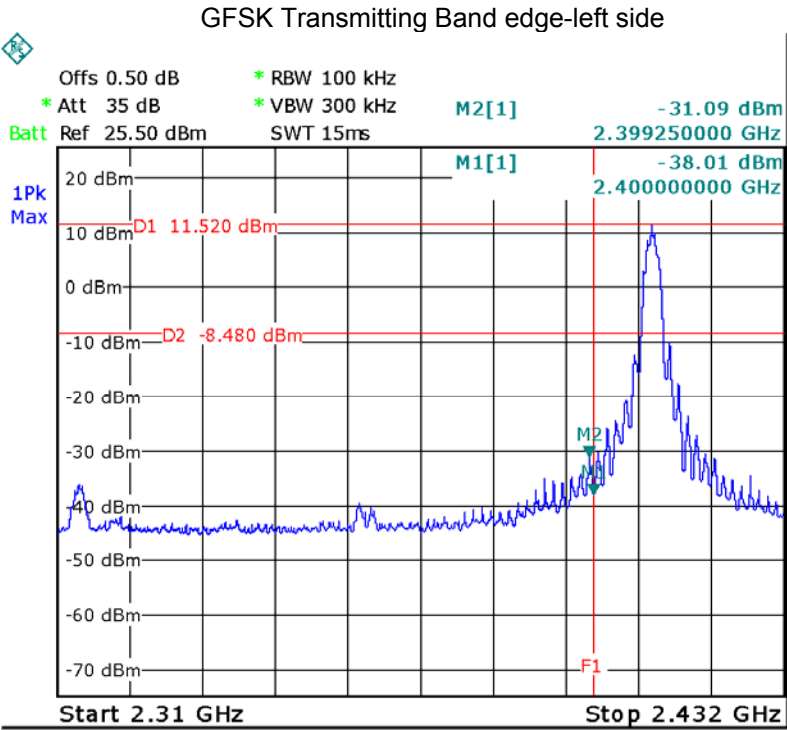

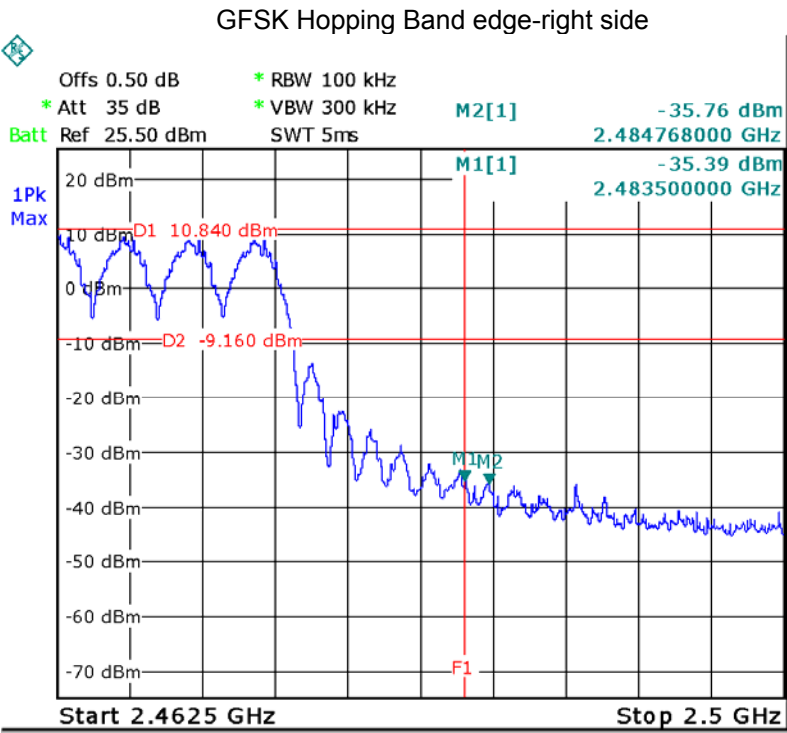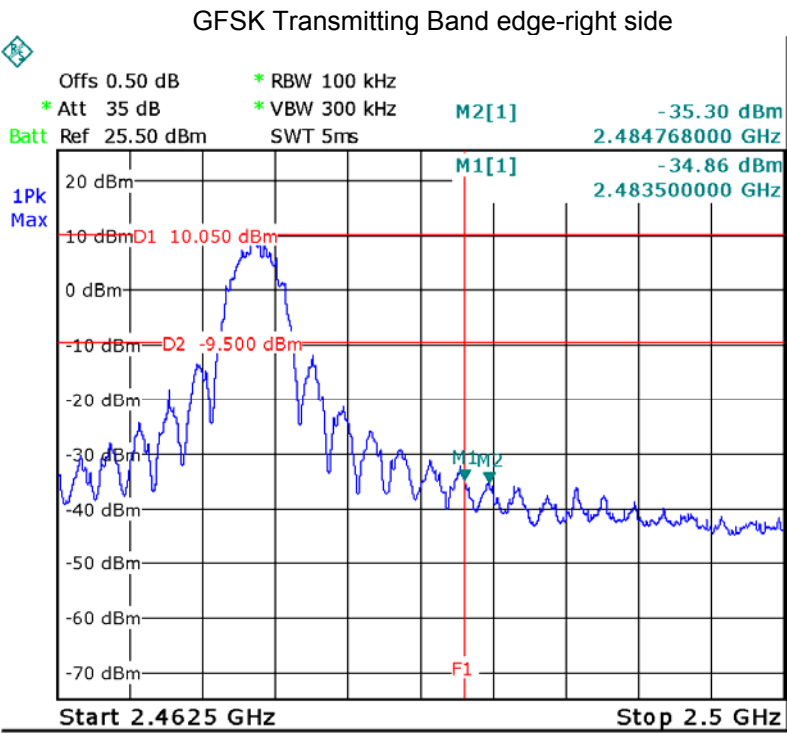

10 Bandwidth Measurement

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Mode:	Test in fixing operating frequency at low, Middle, high channel.

10.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyser: RBW = 100 kHz, VBW = 300 kHz



10.2 Test Result

Modulation	Test Channel	20 dB Bandwidth	99% Bandwidth
GFSK	Low	3.593MHz	3.553MHz
GFSK	Middle	3.613MHz	3.573MHz
GFSK	High	3.633MHz	3.533MHz

Test plots

GFSK Low Channel

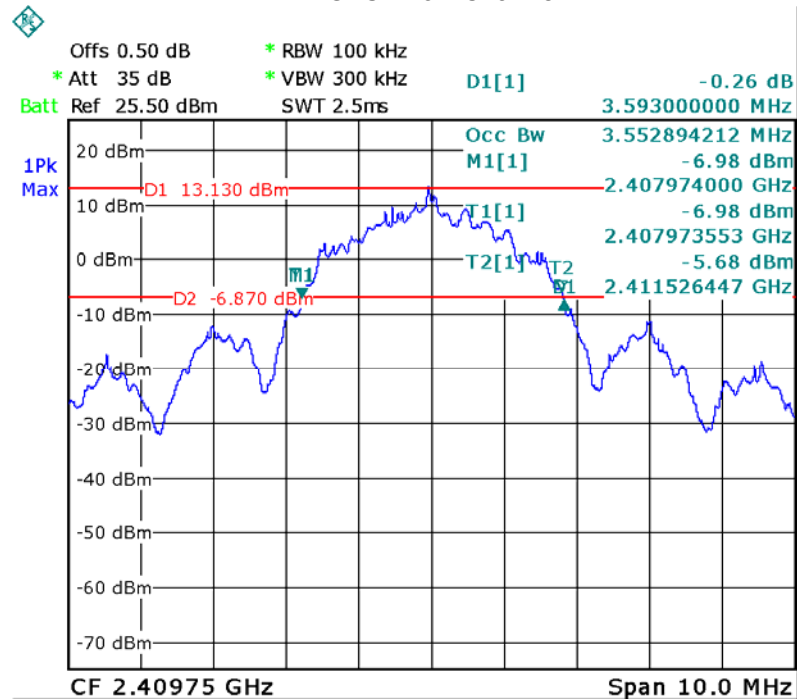

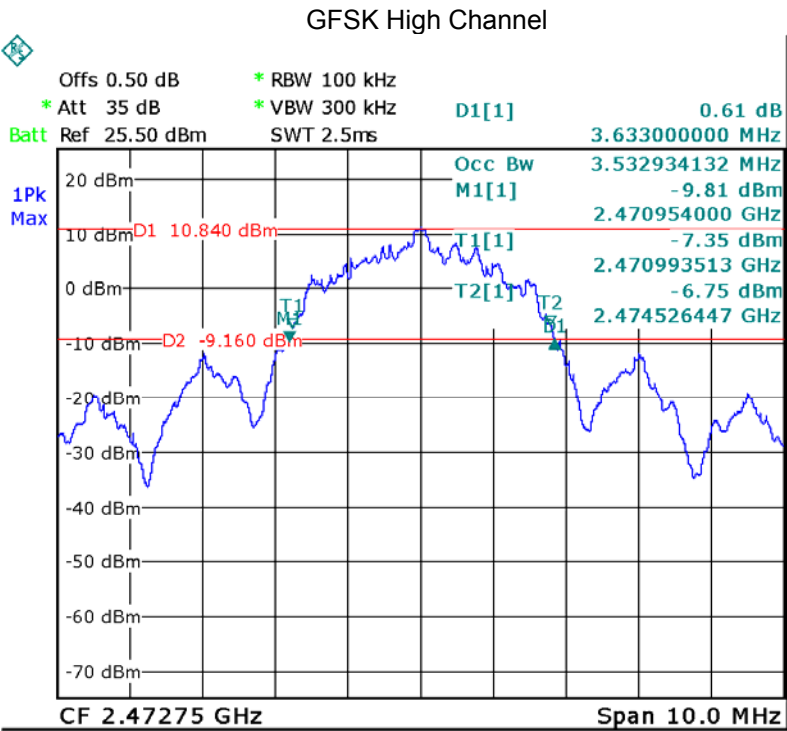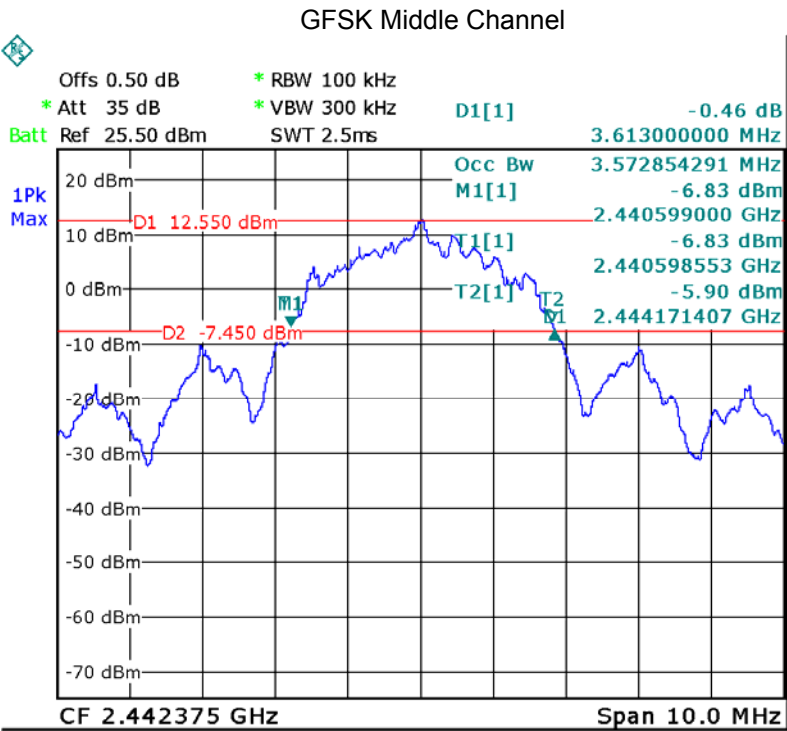

11 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Number of Hopping Frequency" of this document. The 0.125watts (20.97 dBm) limit applies.
Test mode:	Test in fixing frequency transmitting mode.

11.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyser: RBW = 3 MHz VBW =3 MHz Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

11.2 Test Result


Test Mode	Data Rate	Peak Power(dBm)			Limit (dBm)
		Low Channel	Middle Channel	High Channel	
GFSK	1Mbps	15.21	14.99	13.77	20.97


Test plots

GFSK Low Channel

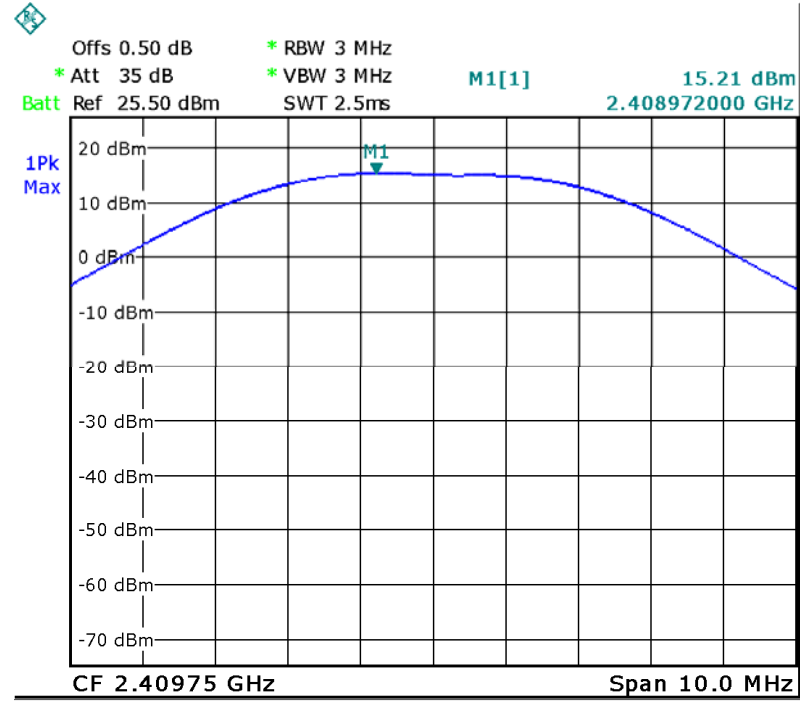

GFSK Middle Channel

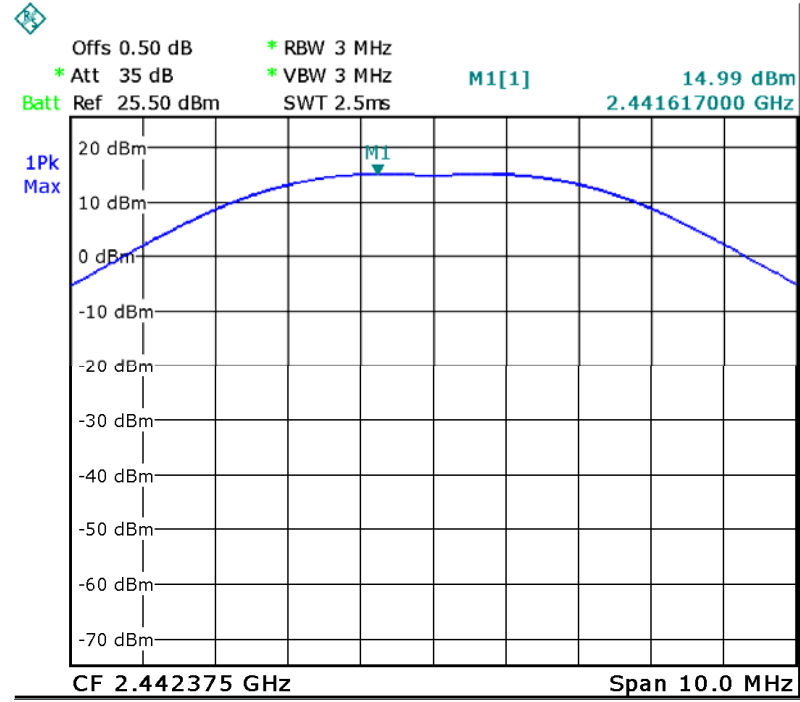

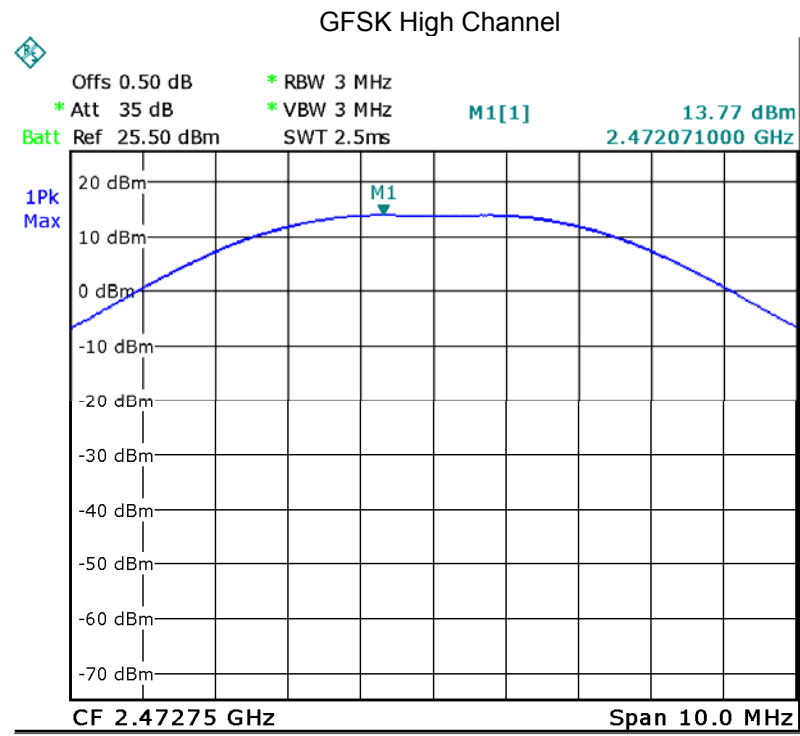

12 Hopping Channel Separation

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247(a) (1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.
Test Mode:	Test in hopping transmitting operating mode.

12.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyser: RBW = 30KHz. VBW = 100 KHz, Span = 3MHz Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

12.2 Test Result


Modulation	Test Channel	Separation (MHz)	Result
GFSK	Low	3.375	PASS
GFSK	Middle	3.375	PASS
GFSK	High	3.375	PASS


Test plots

GFSK Low Channel

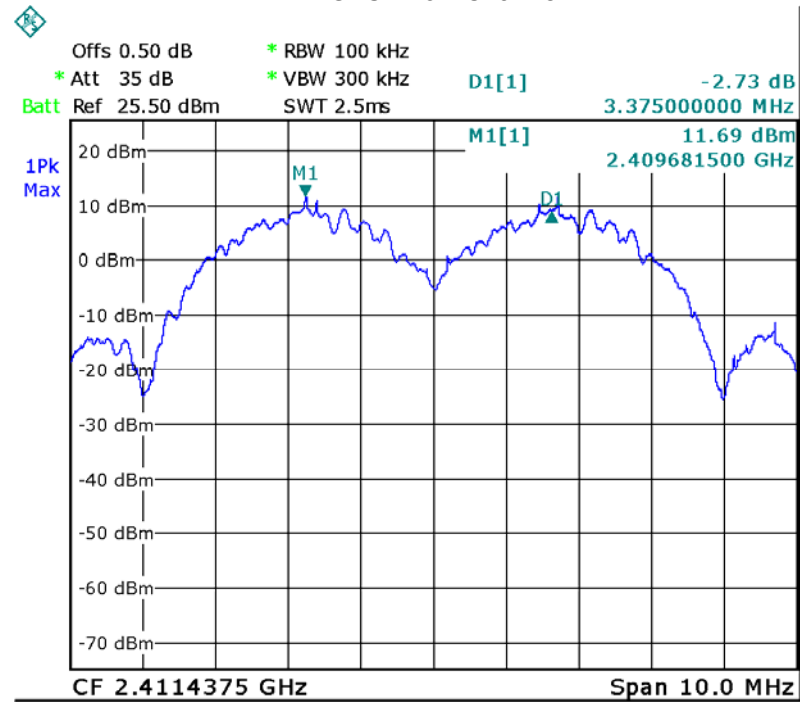

GFSK Middle Channel

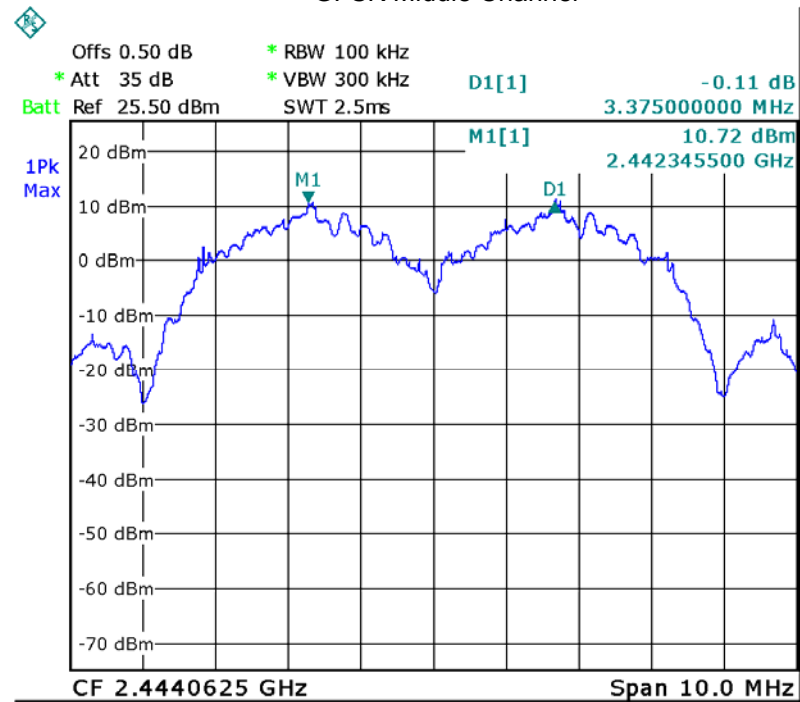

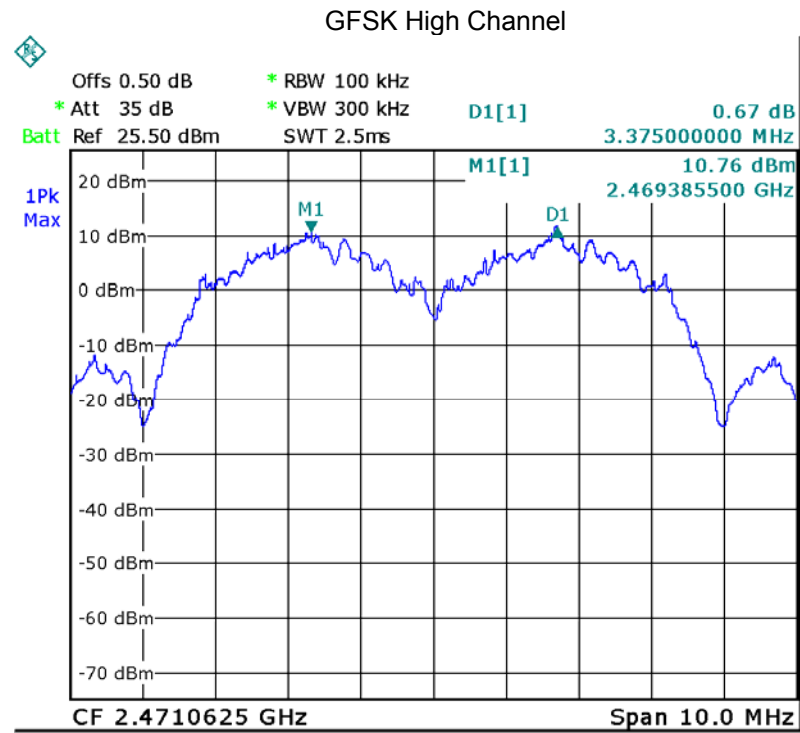

13 Number of Hopping Frequency


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247 (a) (1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.

13.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyser: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyser: Start Frequency = 2.4GHz, Stop Frequency = 2.483GHz. Sweep=auto;

13.2 Test Result

Test Plots: 19 Channels in total

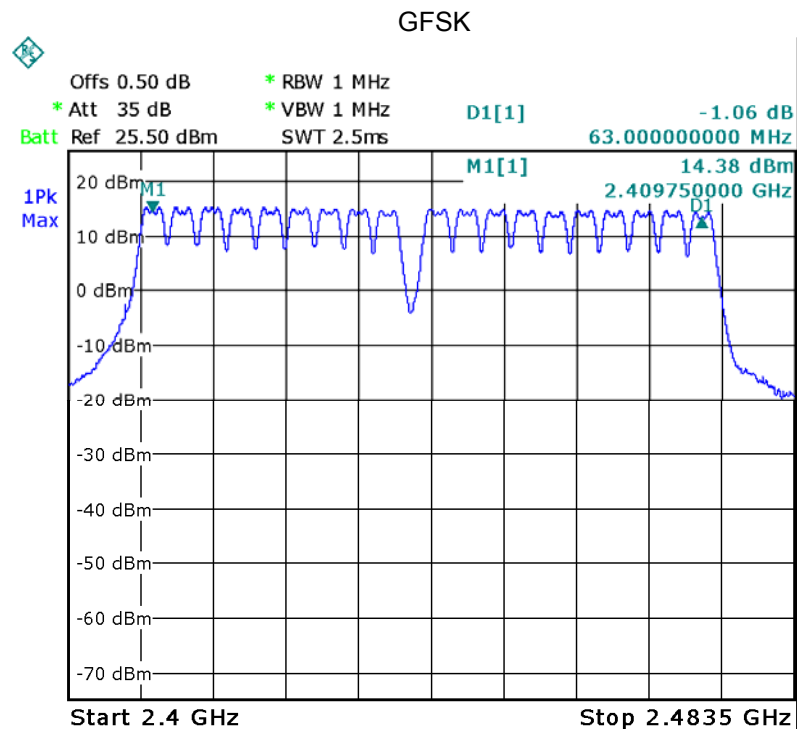

14 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247(a) (1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

14.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyser span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g. data rate. modulation format. etc.). Repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).


14.2 Test Result

Channel	T _{on} (ms)	T _{period} (ms)	N _(channels)	Dwell Time(ms)	Limits(ms)
low	0.80	21.60	19	281.48	400
Middle	0.80	21.60	19	281.48	400
high	0.80	21.60	19	281.48	400


Remark: Dwell Time = $T_{on} \text{ (ms)} * 1s / T_{period} \text{ (ms)} * 400ms * N_{(channels)}$


Test Plots

Low Channel

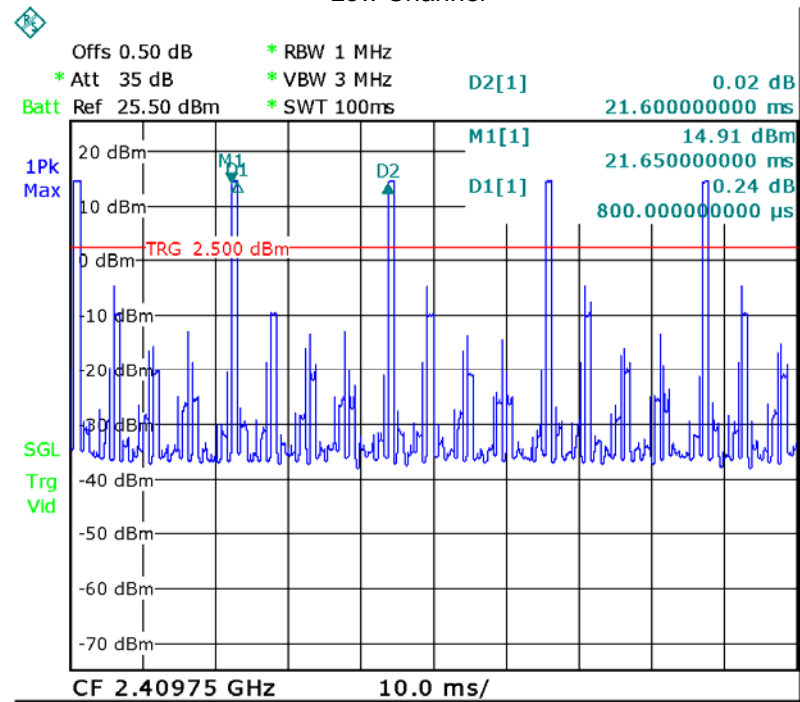

Middle Channel

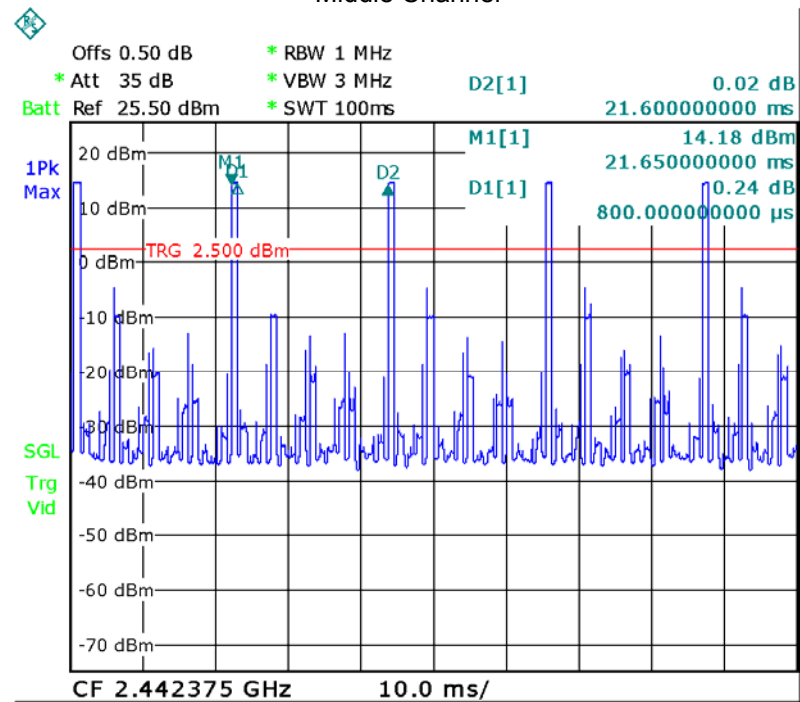

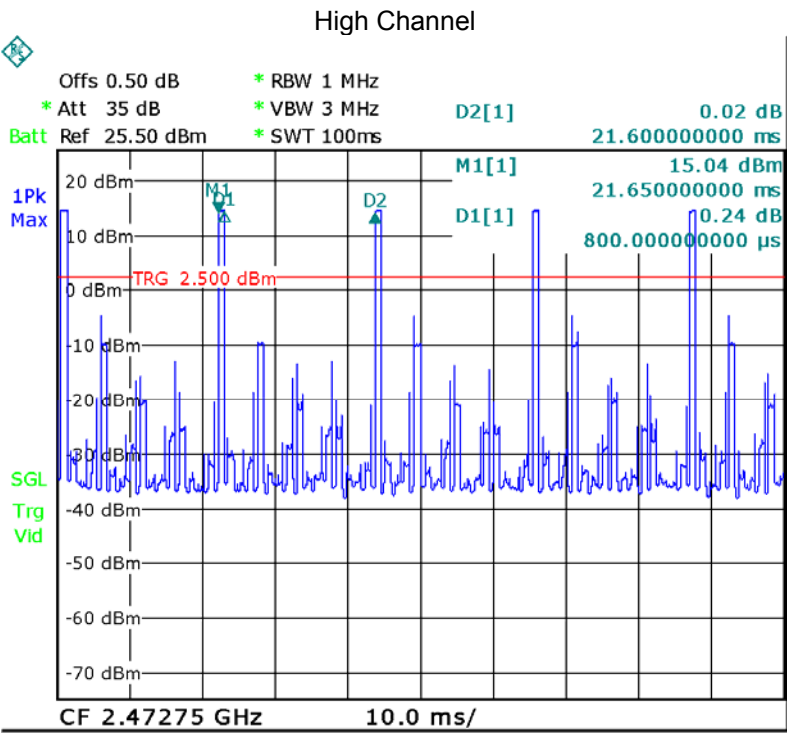


15 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Result:

The EUT has one internal permanent antenna, the gain is 2 dBi. meets the requirements of FCC 15.203.

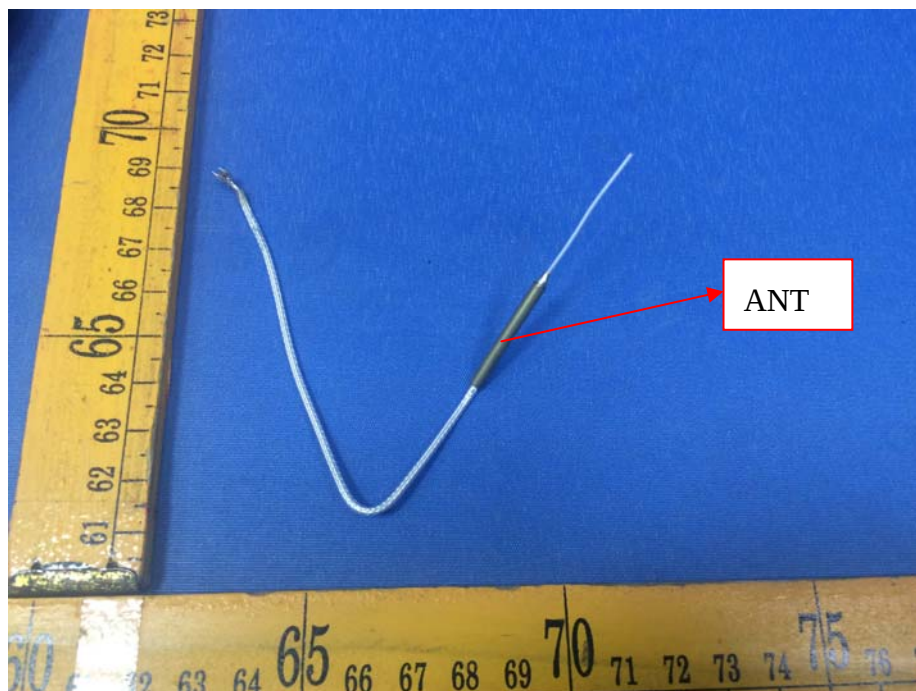

16 RF Exposure

Test Requirement: FCC Part 1.1307

Evaluation Method: FCC Part 2.1091 & KDB 447498 D01 General RF Exposure Guidance v06

16.1 Requirements

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

16.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz; *Plane-wave equivalent power density

16.3 MPE Calculation Method

$$S = \frac{P \times G}{4 \times \pi \times R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = output power to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator,
the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)


From the peak EUT RF output power, the minimum mobile separation distance, R=20cm, as well as the gain of the used antenna, the RF power density can be obtained

Antenna Gain (dBi)	Antenna Gain (numeric)	Max. Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm ²)	Limit of Power Density (mW/cm ²)	Result
2.00	1.585	15.21	33.19	0.0105	1	Compliance


17 Photographs – Model WBU-900C Test Setup

17.1 Photograph – Radiation Spurious Emission Test Setup

9 KHz to 30MHz

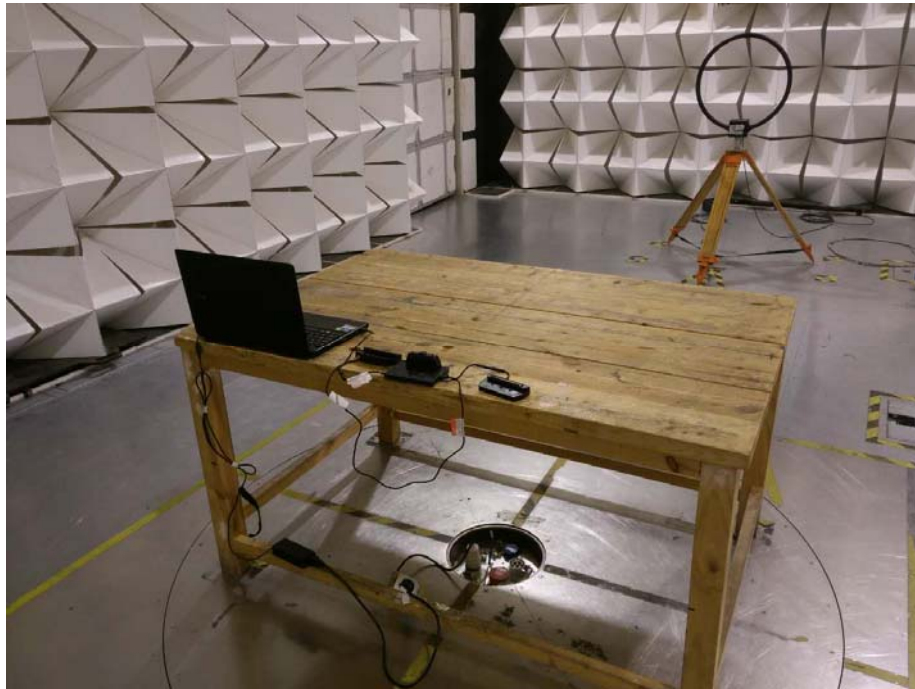


30MHz-1GHz

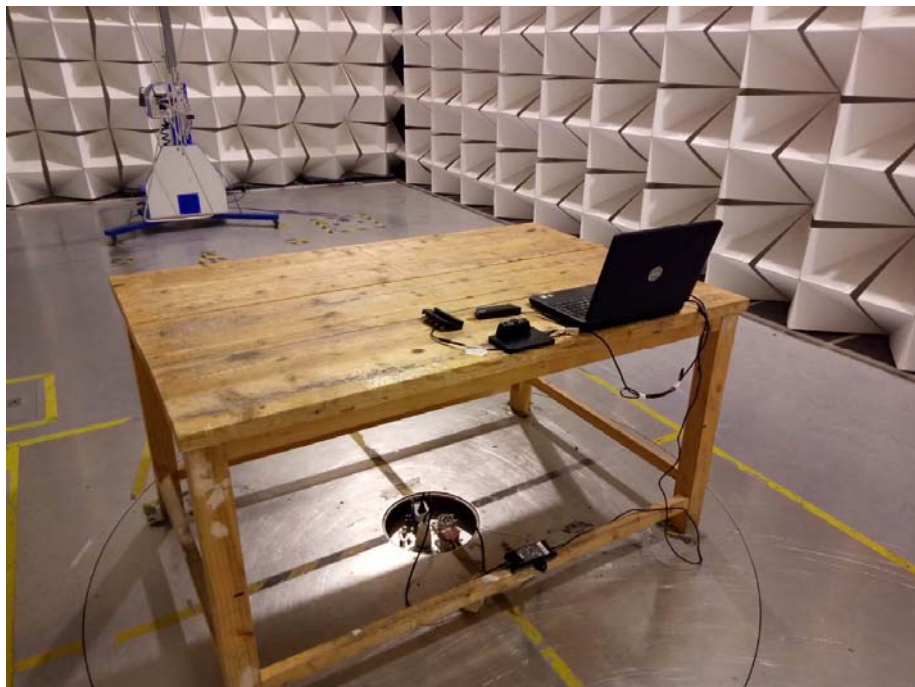



Above 1GHz



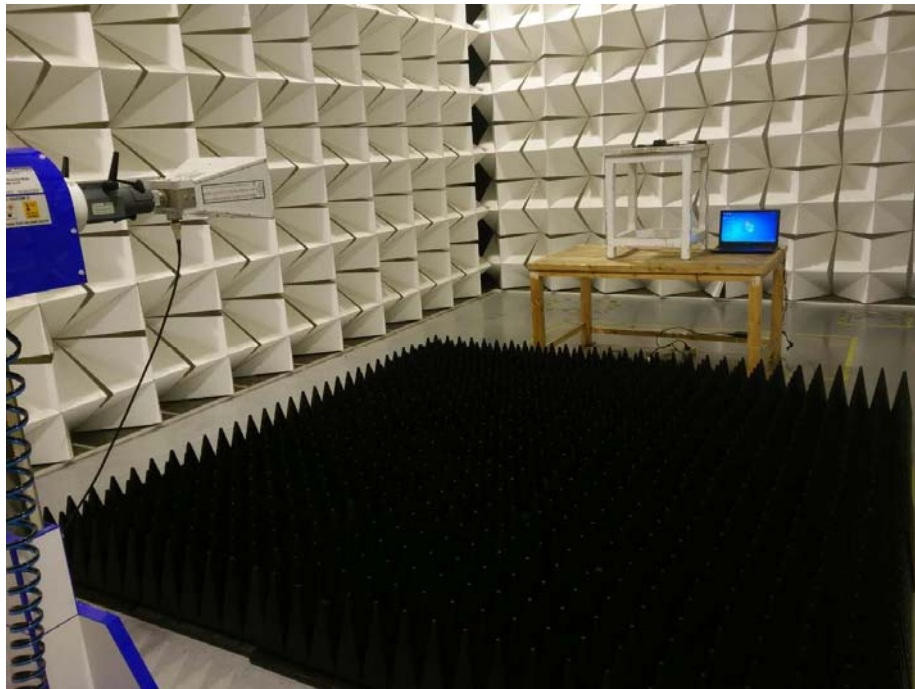

17.2 Photograph – Conducted Emission Test Setup



18 Photographs - Constructional Details

18.1 Model WBU-900C-External Photos

















18.2 Model WBU-900C-Internal Photos

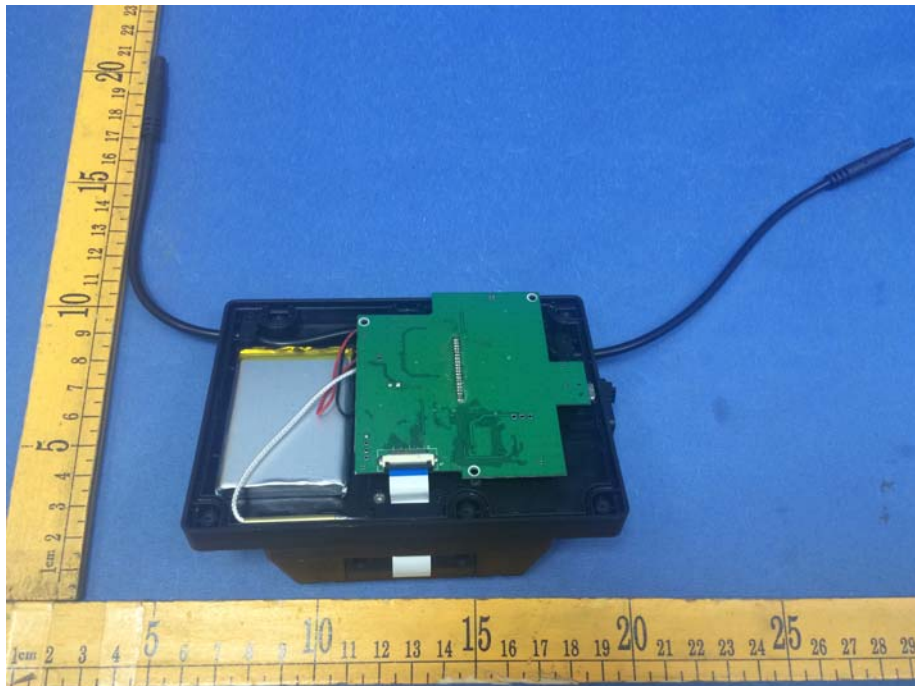
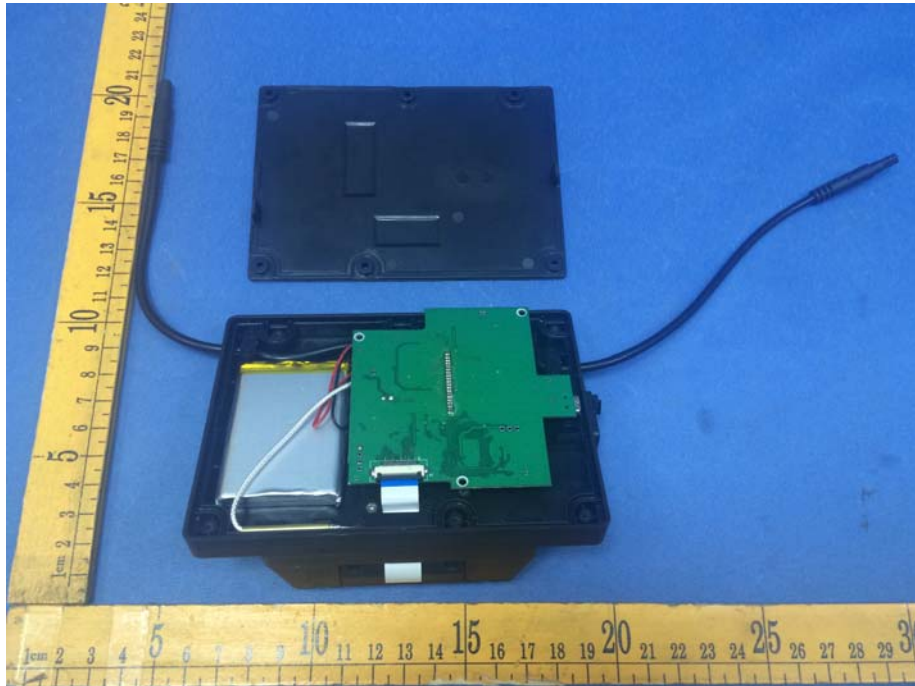


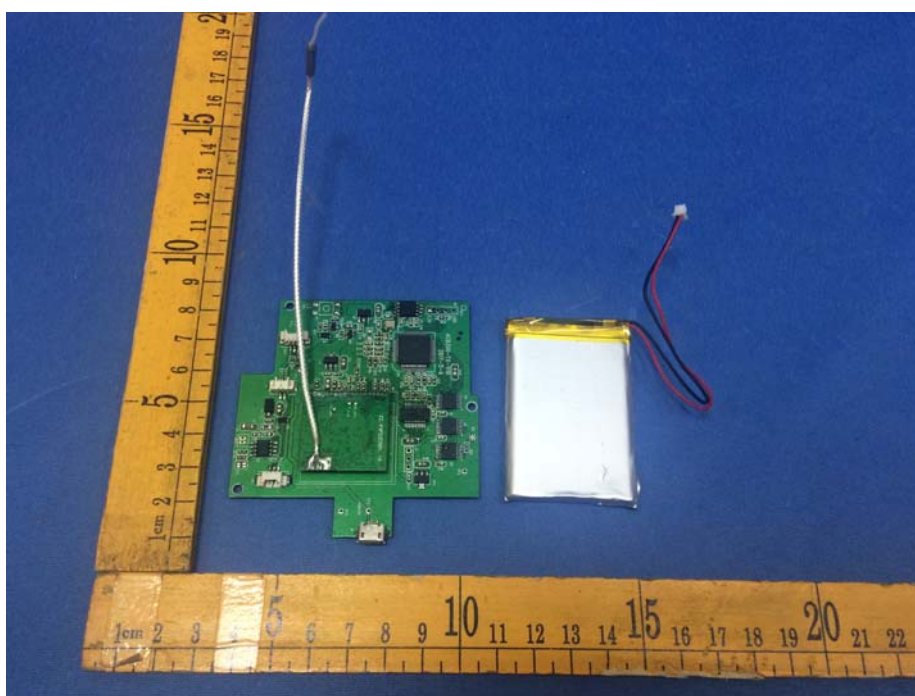


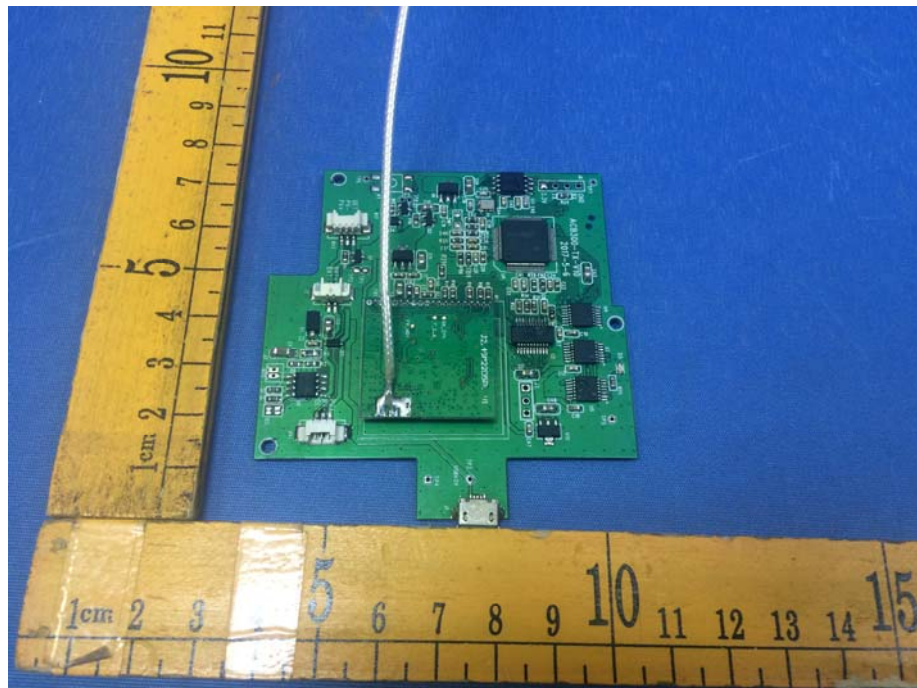

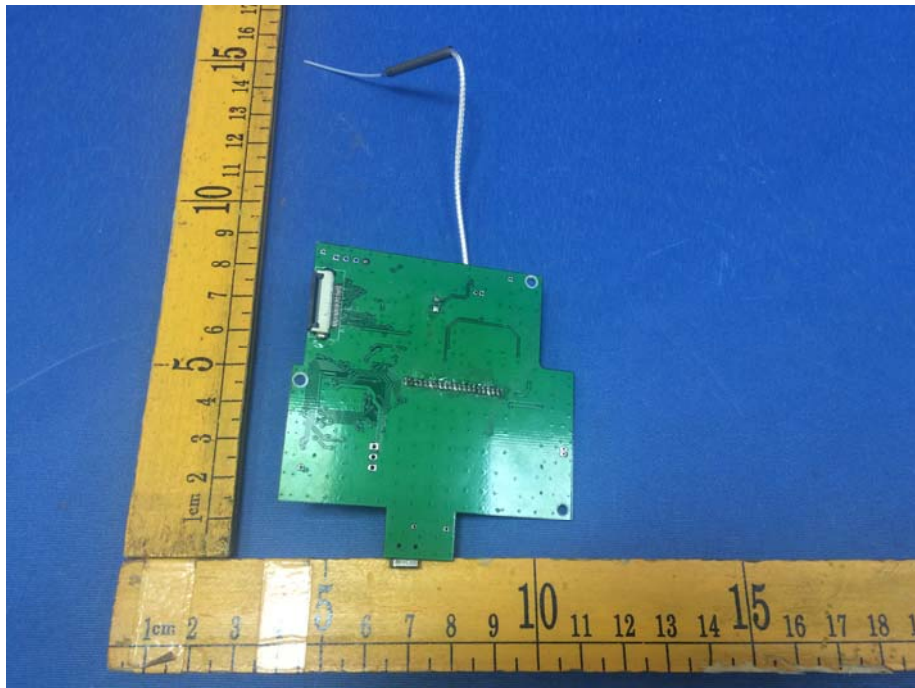


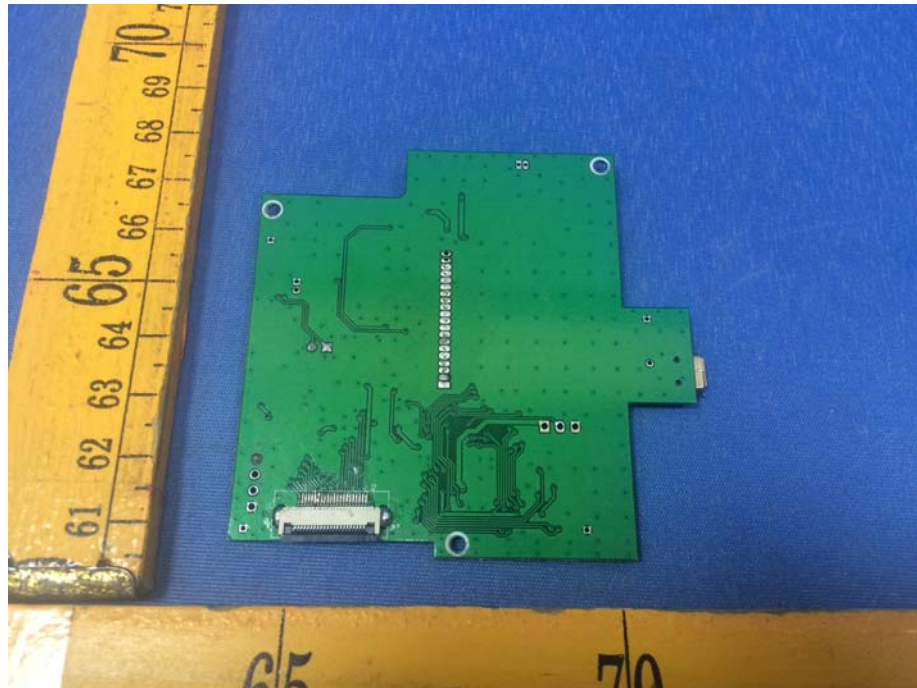


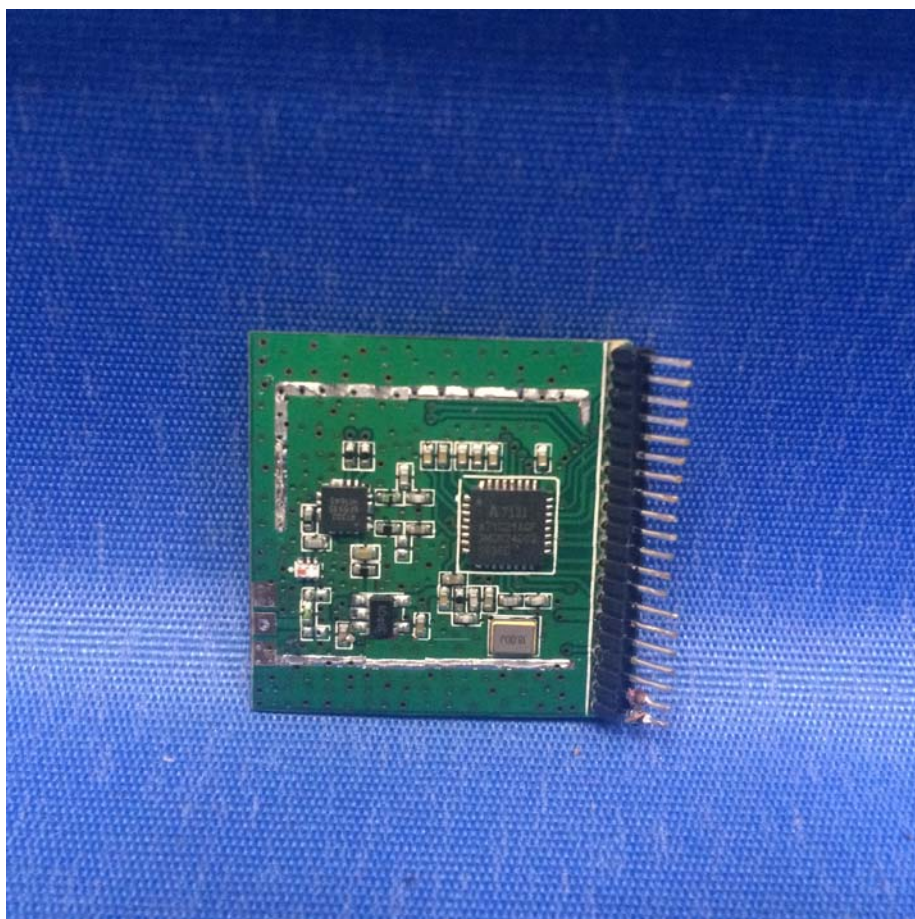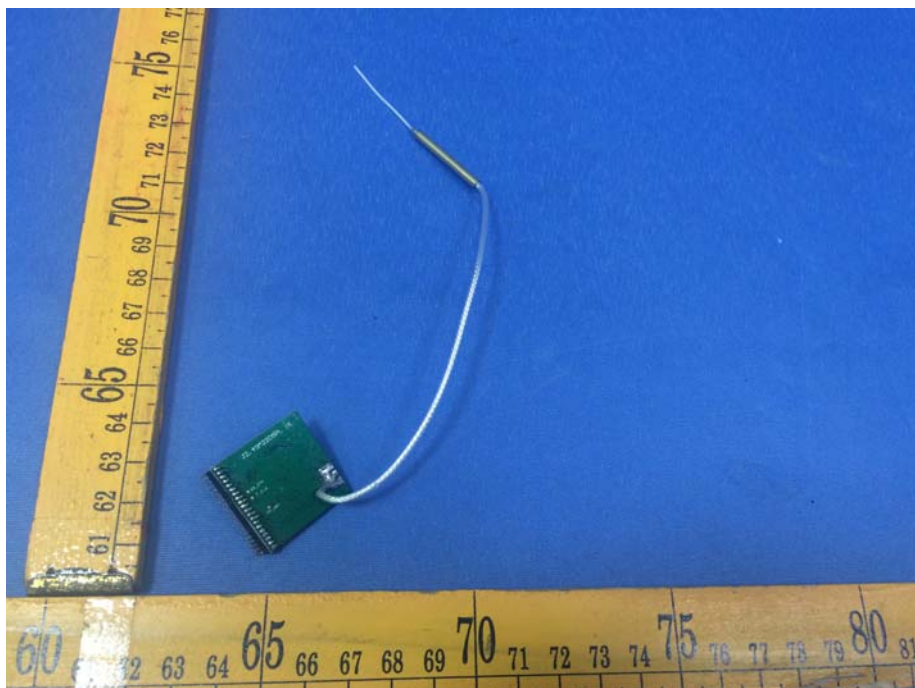

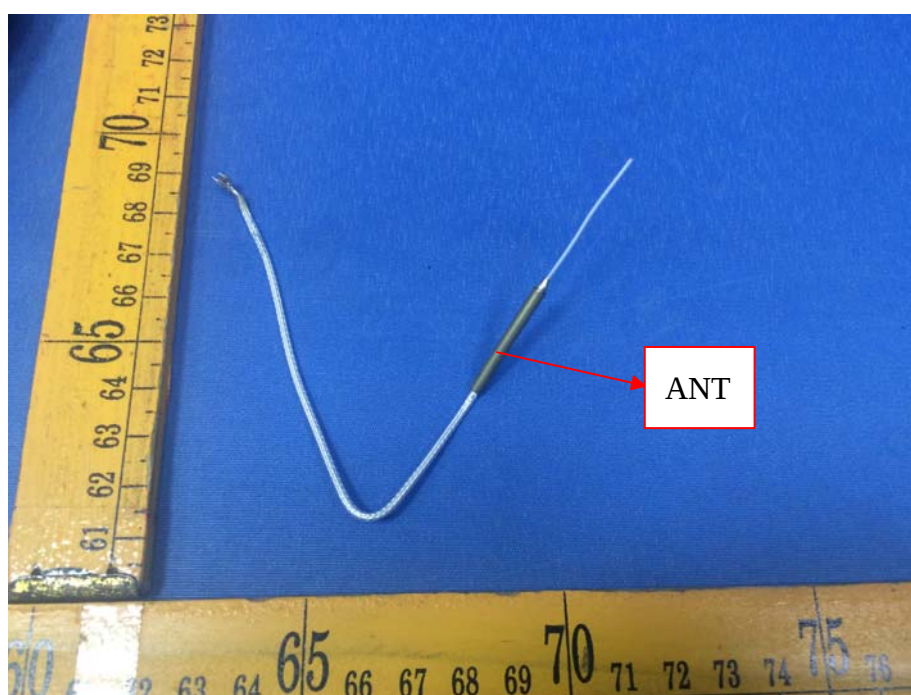




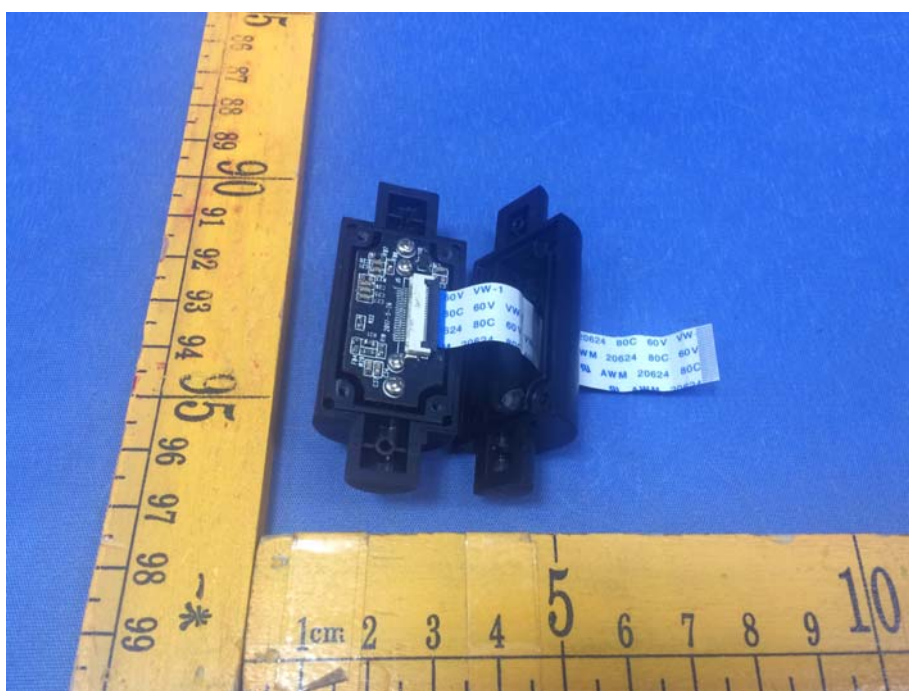

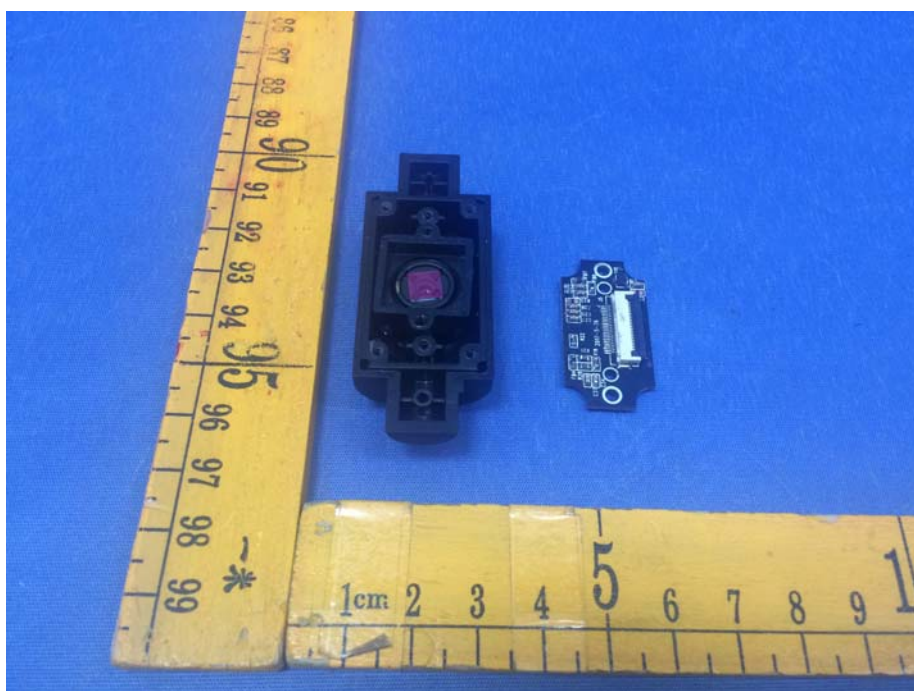



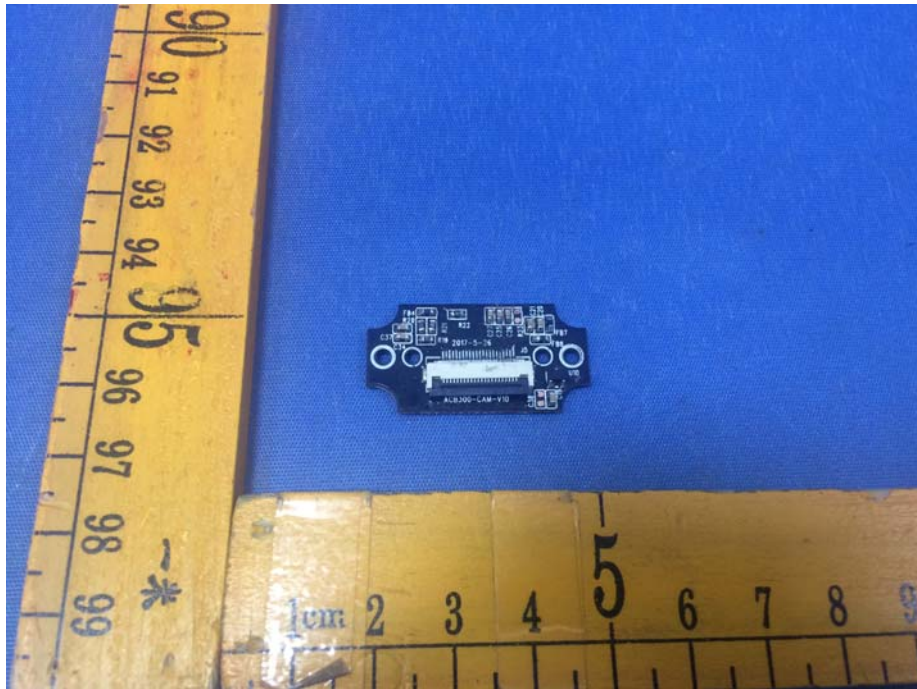



===== End of Report =====