

TEST REPORT

FCC ID.	HV4DTC141
Test Report No.	TCT250513E016
Date of issue	Jun. 04, 2025
Testing laboratory	SHENZHEN TONGCE TESTING LAB
Testing location/ address:	2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China
Applicant's name	Wacom Co Ltd
Address	2-510-1 Toyonodai, Kazo-shi, Saitama 349-1148, Japan
Manufacturer's name	Wacom Co Ltd
Address	2-510-1 Toyonodai, Kazo-shi, Saitama 349-1148, Japan
Standard(s)	FCC CFR Title 47 Part 15 Subpart C
Product Name	Pen Display
Trade Mark	wacom®
Model/Type reference	DTC141, DTC141*****(* may be alphanumeric/symbol or blank)
Rating(s)	DC 5V
Date of receipt of test item	May 13, 2025
Date (s) of performance of test	May 13, 2025 ~ Jun. 04, 2025
Tested by (+signature)	Aaron MO
Check by (+signature)	Beryl ZHAO
Approved by (+signature) :	Tomsin



General disclaimer:

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

Table of Contents

1. General Product Information	3
1.1. EUT description	3
1.2. Model(s) list.....	3
2. Test Result Summary	4
3. General Information.....	5
3.1. Test environment and mode.....	5
3.2. Description of Support Units.....	5
4. Facilities and Accreditations	6
4.1. Facilities	6
4.2. Location	6
4.3. Measurement Uncertainty.....	6
5. Test Results and Measurement Data	7
5.1. Antenna requirement	7
5.2. Conducted Emission.....	8
5.3. Radiated Spurious Emission Measurement.....	12

Appendix A: Photographs of Test Setup

Appendix B: Photographs of EUT

1. General Product Information

1.1. EUT description

Product Name.....	Pen Display
Model/Type reference.....	DTC141
Sample Number.....	TCT250513E016-0101
Operation Frequency	531.25KHz-593.75KHz
Modulation Technology	ASK
Rating(s)	DC 5V
Accessories	Digital Pen: Brand Name: Wacom Model Name: CP-923-03B-2

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

1.2. Model(s) list

No.	Model No.	Tested with
1	DTC141	<input checked="" type="checkbox"/>
Other models	DTC141*****(* may be alphanumeric/symbol or blank)	<input type="checkbox"/>

Note: DTC141 is tested model, other models are derivative models. The models are identical in circuit and PCB layout, only different on the model names. So the test data of DTC141 can represent the remaining models.

1.3. Operation Frequency

Channel	Frequency	Channel	Frequency	Channel	Frequency
0	531.25KHz	1	562.5kHz	2	593.75KHz

Remark: Channel 1 have been tested.

2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Spurious Emission	§15.209(a)(f)	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. General Information

3.1. Test environment and mode

Operating Environment:		
Condition	Conducted Emission	Radiated Emission
Temperature:	23.1 °C	24.3 °C
Humidity:	48 % RH	54 % RH
Atmospheric Pressure:	1010 mbar	1010 mbar

Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations.

The sample was placed 0.8m for the measurement below above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case(Z axis) are shown in Test Results of the following pages.

3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Notebook Computer	G3 3500	00342-36088-9983 2-AAOEM	/	DELL
Power Supply	HA130PM190	CN-0CY0JM-CH20 0-0B6-7405-A01	/	DELL
Computer	DN 15.6 AIO	/	/	Diebold Nixdorf Systems GmbH
Power Supply	ADC029	5420JN90NZ	/	AcBel

Note: Both the DN 15.6 AIO computer and the ADC029 power supply are exclusively used for radiated emissions testing within the 30 MHz to 1 GHz frequency range.

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4. Facilities and Accreditations

4.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- A2LA-No.: 4320.01

SHENZHEN TONGCE TESTING LAB

The testing lab has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.

4.2. Location

SHENZHEN TONGCE TESTING LAB

Address: 2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China

TEL: +86-755-27673339

5. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	± 3.10 dB
2	RF power, conducted	± 0.12 dB
3	Spurious emissions, conducted	± 0.11 dB
4	All emissions, radiated(<1 GHz)	± 4.56 dB
5	All emissions, radiated(1 GHz - 18 GHz)	± 4.22 dB
6	All emissions, radiated(18 GHz- 40 GHz)	± 4.36 dB

6. Test Results and Measurement Data

6.1. Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
E.U.T Antenna:	
The antenna is internal antenna which permanently attached.	

6.2. Conducted Emission

6.2.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2020														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	<p>Reference Plane</p> <p>40cm</p> <p>E.U.T — AC power — 80cm — LISN — Filter — AC power</p> <p>Test table/Insulation plane</p> <p>EMI Receiver</p> <p>Remark: E.U.T: Equipment Under Test LISN: Line impedance Stabilization Network Test table height=0.8m</p>														
Test Mode:	Transmitting Mode														
Test Procedure:	<ol style="list-style-type: none"> 1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement. 														
Test Result:	PASS														


6.2.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)					
Equipment	Manufacturer	Model	Serial Number	Date of Cal.	Due Date
EMI Test Receiver	R&S	ESCI3	100898	Jun. 27, 2024	Jun. 26, 2025
LISN	Schwarzbeck	NSLK 8126	8126453	Jan. 21, 2025	Jan. 20, 2026
Attenuator	N/A	10dB	164080	Jun. 27, 2024	Jun. 26, 2025
Line-5	TCT	CE-05	/	Jun. 27, 2024	Jun. 26, 2025
EMI Test Software	EZ_EMC	EMEC-3A1	1.1.4.2	/	/

6.2.3. Test data

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

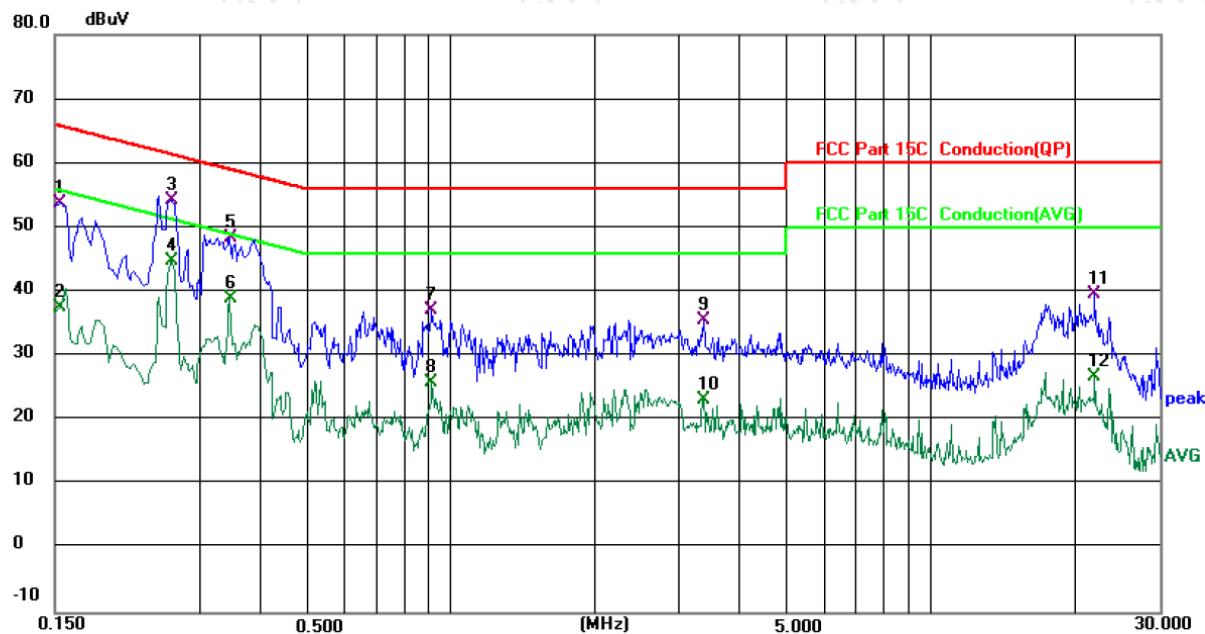

Site 844 Shielding Room

Phase: *L1*

Temperature: 23.1 (°C)

Humidity: 48 %

Limit: FCC Part 15C Conduction(QP)

Power: DC 5 V(Notebook Computer Input AC 120 V/60 Hz)

No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Comment
			dBuV	dB	dBuV	dB	Detector	
1	0.1539	43.88	9.96	53.84	65.79	-11.95	QP	
2	0.1539	27.70	9.96	37.66	55.79	-18.13	AVG	
3	0.2620	44.33	9.93	54.26	61.37	-7.11	QP	
4 *	0.2620	34.85	9.93	44.78	51.37	-6.59	AVG	
5	0.3459	38.44	9.93	48.37	59.06	-10.69	QP	
6	0.3459	28.91	9.93	38.84	49.06	-10.22	AVG	
7	0.9180	27.15	9.93	37.08	56.00	-18.92	QP	
8	0.9180	15.89	9.93	25.82	46.00	-20.18	AVG	
9	3.3660	25.50	10.09	35.59	56.00	-20.41	QP	
10	3.3660	13.14	10.09	23.23	46.00	-22.77	AVG	
11	21.9939	28.96	10.70	39.66	60.00	-20.34	QP	
12	21.9939	16.14	10.70	26.84	50.00	-23.16	AVG	

Note:

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)

Limit (dB μ V) = Limit stated in standard


Margin (dB) = Measurement (dB μ V) – Limits (dB μ V)

Q.P. =Quasi-Peak

AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

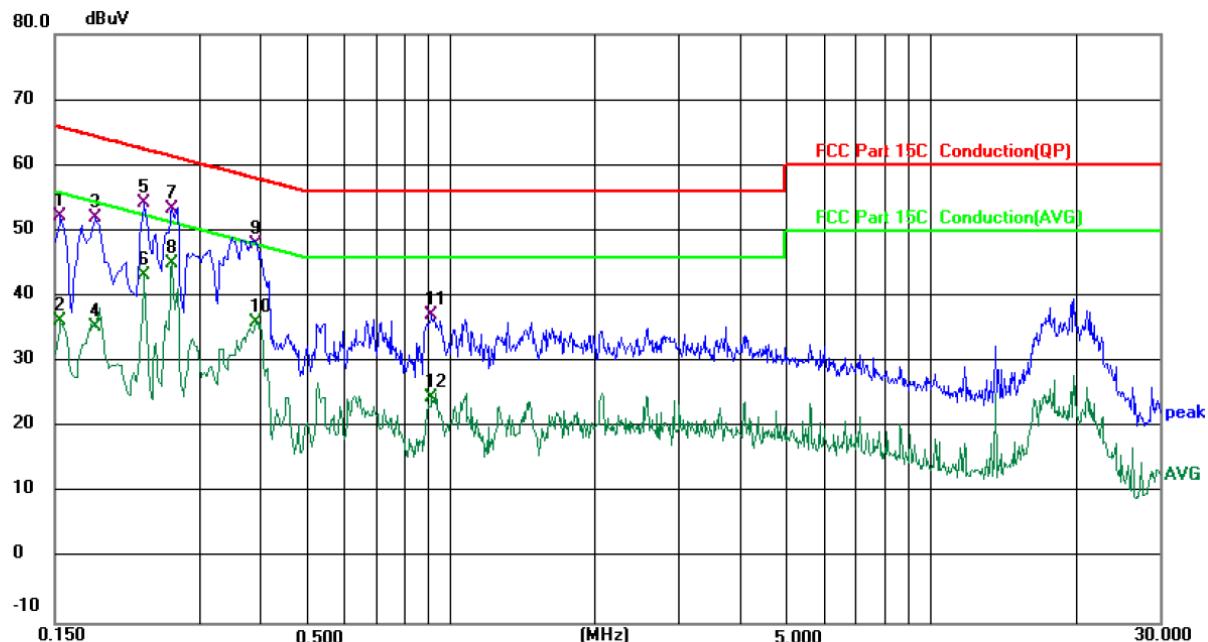

Site 844 Shielding Room

Phase: **N**

Temperature: 23.1 (°C)

Humidity: 48 %

Limit: FCC Part 15C Conduction(QP)

Power: DC 5 V (Notebook Computer Input AC 120 V/60 Hz)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1539	42.19	9.94	52.13	65.79	-13.66	QP	
2		0.1539	26.20	9.94	36.14	55.79	-19.65	AVG	
3		0.1819	42.16	9.93	52.09	64.40	-12.31	QP	
4		0.1819	25.46	9.93	35.39	54.40	-19.01	AVG	
5		0.2300	44.37	9.93	54.30	62.45	-8.15	QP	
6		0.2300	33.29	9.93	43.22	52.45	-9.23	AVG	
7		0.2620	43.46	9.93	53.39	61.37	-7.98	QP	
8 *		0.2620	35.14	9.93	45.07	51.37	-6.30	AVG	
9		0.3933	38.06	9.94	48.00	57.99	-9.99	QP	
10		0.3933	26.17	9.94	36.11	47.99	-11.88	AVG	
11		0.9180	27.08	9.96	37.04	56.00	-18.96	QP	
12		0.9180	14.48	9.96	24.44	46.00	-21.56	AVG	

Note:

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)

Limit (dB μ V) = Limit stated in standard

Margin (dB) = Measurement (dB μ V) – Limits (dB μ V)


Q.P. = Quasi-Peak AVG = average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

6.3. Radiated Spurious Emission Measurement

6.3.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.209																												
Test Method:	ANSI C63.10:2020																												
Frequency Range:	9 kHz to 1 GHz																												
Measurement Distance:	3 m																												
Antenna Polarization:	Horizontal & Vertical																												
Operation mode:	Refer to item 3.1																												
Receiver Setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>9kHz- 150kHz</td> <td>Quasi-peak</td> <td>200Hz</td> <td>1kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>150kHz- 30MHz</td> <td>Quasi-peak</td> <td>9kHz</td> <td>30kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120KHz</td> <td>300KHz</td> <td>Quasi-peak Value</td> </tr> </tbody> </table>					Frequency	Detector	RBW	VBW	Remark	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value				
Frequency	Detector	RBW	VBW	Remark																									
9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value																									
150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value																									
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value																									
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Field Strength (microvolts/meter)</th> <th>Measurement Distance (meters)</th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/F(KHz)</td> <td>300</td> </tr> <tr> <td>0.490-1.705</td> <td>24000/F(KHz)</td> <td>30</td> </tr> <tr> <td>1.705-30</td> <td>30</td> <td>30</td> </tr> <tr> <td>30-88</td> <td>100</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> </tr> </tbody> </table>					Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	0.009-0.490	2400/F(KHz)	300	0.490-1.705	24000/F(KHz)	30	1.705-30	30	30	30-88	100	3	88-216	150	3	216-960	200	3	Above 960	500	3
Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)																											
0.009-0.490	2400/F(KHz)	300																											
0.490-1.705	24000/F(KHz)	30																											
1.705-30	30	30																											
30-88	100	3																											
88-216	150	3																											
216-960	200	3																											
Above 960	500	3																											
Test setup:	<p>For radiated emissions below 30MHz</p> <p>Distance = 3m</p> <p>0.8m</p> <p>Turn table</p> <p>1m</p> <p>Computer</p> <p>Pre -Amplifier</p> <p>Receiver</p> <p>Ground Plane</p> <p>30MHz to 1GHz</p>																												

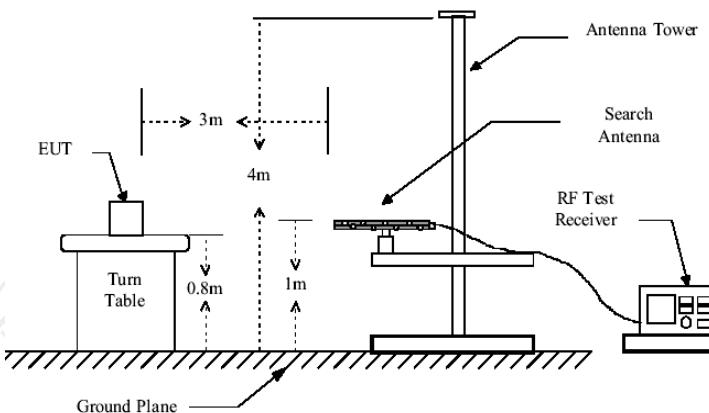


Test Procedure:	<ol style="list-style-type: none"> For the radiated emission test below 1GHz: The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported. Use the following spectrum analyzer settings: <ol style="list-style-type: none"> Span shall wide enough to fully capture the emission being measured; Set RBW=120 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold; Set RBW = 1 MHz, $VBW = 3$ MHz for $f \geq 1$ GHz for peak measurement. For average measurement: $VBW = 10$ Hz, when duty cycle is no less than 98 percent. $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Test mode:	Refer to section 3.1 for details
Test results:	PASS

6.3.2. Test Instruments

Radiated Emission Test Site (966)					
Equipment	Manufacturer	Model	Serial Number	Date of Cal.	Due Date
EMI Test Receiver	R&S	ESCI7	100529	Jan. 21, 2025	Jan. 20, 2026
Spectrum Analyzer	R&S	FSQ40	200061	Jun. 27, 2024	Jun. 26, 2025
Pre-amplifier	SKET	LNPA_0118G-45	SK2021012102	Jan. 21, 2025	Jan. 20, 2026
Pre-amplifier	SKET	LNPA_1840G-50	SK202109203500	Jan. 21, 2025	Jan. 20, 2026
Pre-amplifier	HP	8447D	2727A05017	Jun. 27, 2024	Jun. 26, 2025
Loop antenna	Schwarzbeck	FMZB1519B	00191	Jun. 27, 2024	Jun. 26, 2025
Broadband Antenna	Schwarzbeck	VULB9163	340	Jun. 29, 2024	Jun. 28, 2025
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Jun. 29, 2024	Jun. 28, 2025
Horn Antenna	Schwarzbeck	BBHA 9170	00956	Jan. 23, 2025	Jan. 22, 2026
Coaxial cable	SKET	RE-03-D	/	Jun. 27, 2024	Jun. 26, 2025
Coaxial cable	SKET	RE-03-M	/	Jun. 27, 2024	Jun. 26, 2025
Coaxial cable	SKET	RE-03-L	/	Jun. 27, 2024	Jun. 26, 2025
Coaxial cable	SKET	RE-04-D	/	Jun. 27, 2024	Jun. 26, 2025
Coaxial cable	SKET	RE-04-M	/	Jun. 27, 2024	Jun. 26, 2025
Coaxial cable	SKET	RE-04-L	/	Jun. 27, 2024	Jun. 26, 2025
Antenna Mast	Keleto	RE-AM	/	/	/
EMI Test Software	EZ_EMCA	FA-03A2 RE+	1.1.4.2	/	/

6.3.3. Test Data

Please refer to following diagram for individual
TX-fundamental single

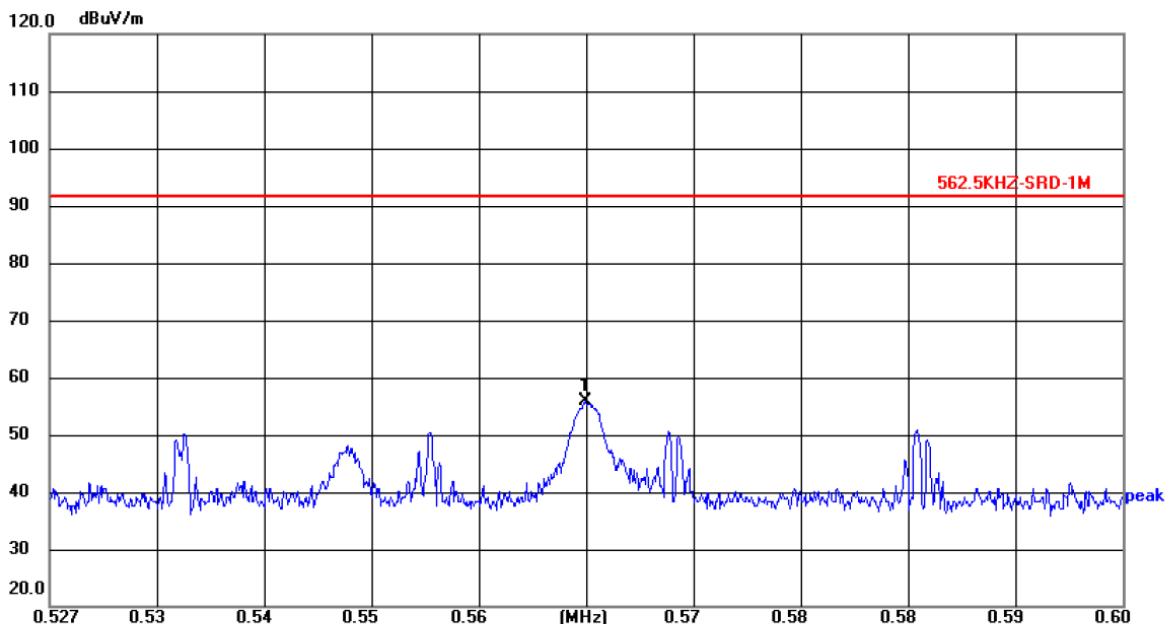

Site: 3m Anechoic Chamber

Polarization: *Coaxial*

Temperature: 21.3(°C)

Humidity: 46 %


Limit: 562.5KHZ-SRD-1M

Power:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	0.5624	34.40	21.47	55.87	91.69	-35.82	peak	P	

9KHz-30MHz

9KHz-150KHz:

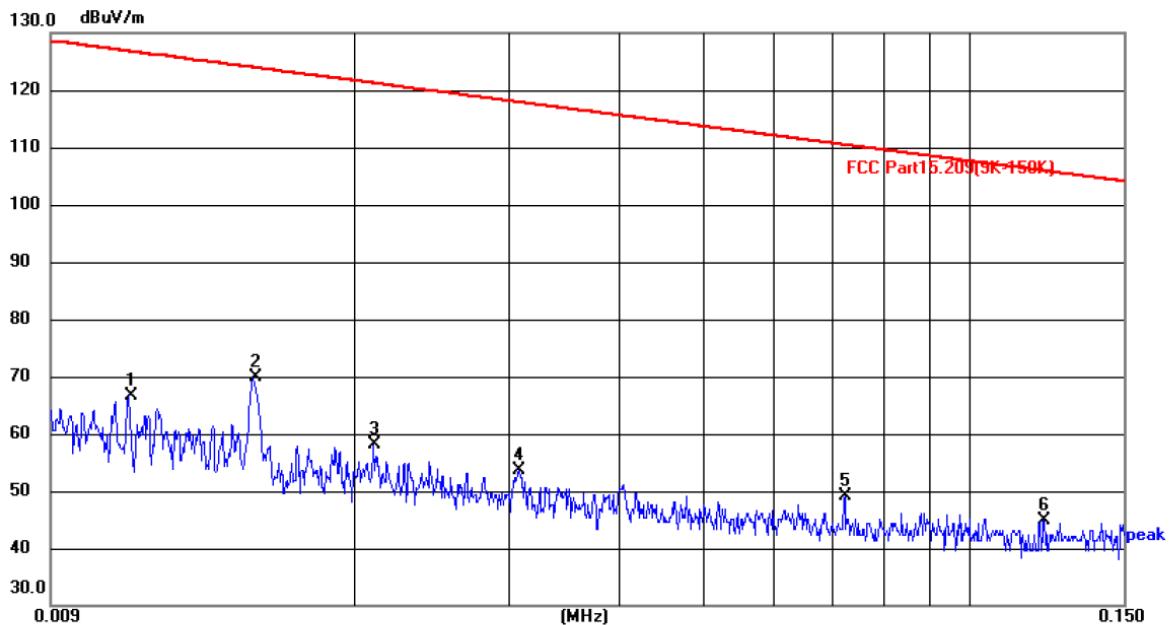

Site: 3m Anechoic Chamber

Polarization: **Coaxial**

Temperature: 21.3(°C)


Humidity: 46 %

Limit: FCC Part15.209(9K-150K)

Power:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	0.0110	46.00	20.53	66.53	126.78	-60.25	peak	P	
2 *	0.0153	49.31	20.55	69.86	123.91	-54.05	peak	P	
3	0.0210	37.45	20.56	58.01	121.16	-63.15	peak	P	
4	0.0307	33.11	20.57	53.68	117.86	-64.18	peak	P	
5	0.0722	28.82	20.28	49.10	110.43	-61.33	peak	P	
6	0.1215	24.46	20.53	44.99	105.91	-60.92	peak	P	

150KHz-30MHz:

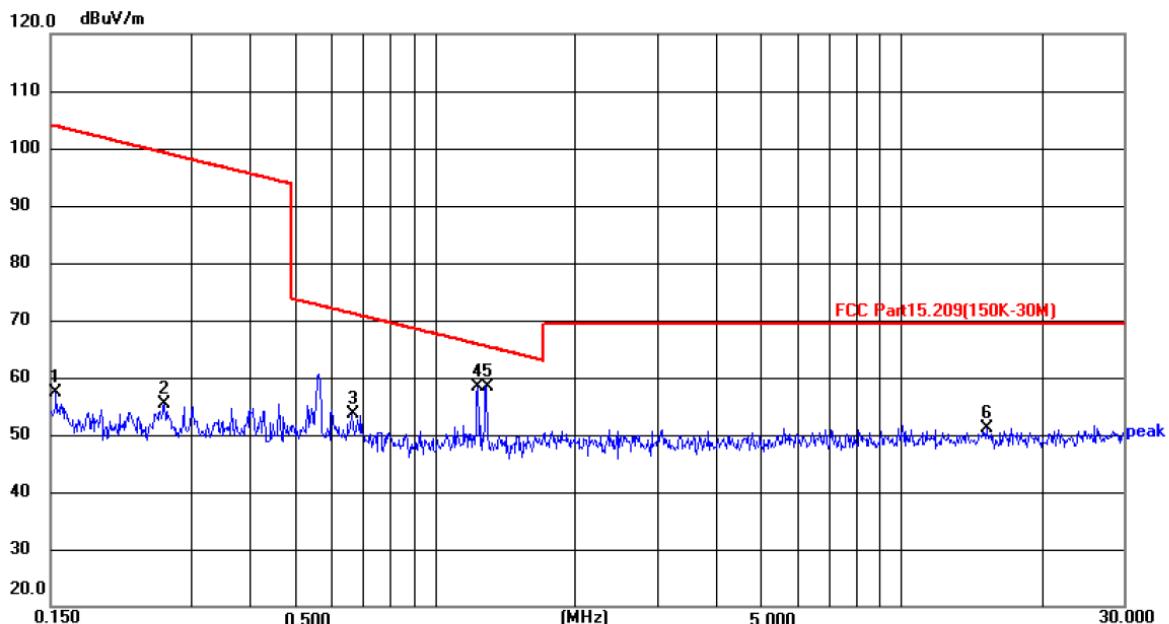

Site: 3m Anechoic Chamber

Polarization: **Coaxial**

Temperature: 21.3(°C)

Humidity: 46 %


Limit: FCC Part15.209(150K-30M)

Power:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	0.1539	36.63	20.73	57.36	103.86	-46.50	peak	P	
2	0.2630	34.33	20.93	55.26	99.20	-43.94	peak	P	
3	0.6647	31.99	21.68	53.67	71.16	-17.49	peak	P	
4	1.2356	35.45	22.85	58.30	65.79	-7.49	peak	P	
5 *	1.2891	35.45	22.95	58.40	65.42	-7.02	peak	P	
6	15.2261	30.50	20.53	51.03	69.50	-18.47	peak	P	

30MHz-1GHz

Horizontal:

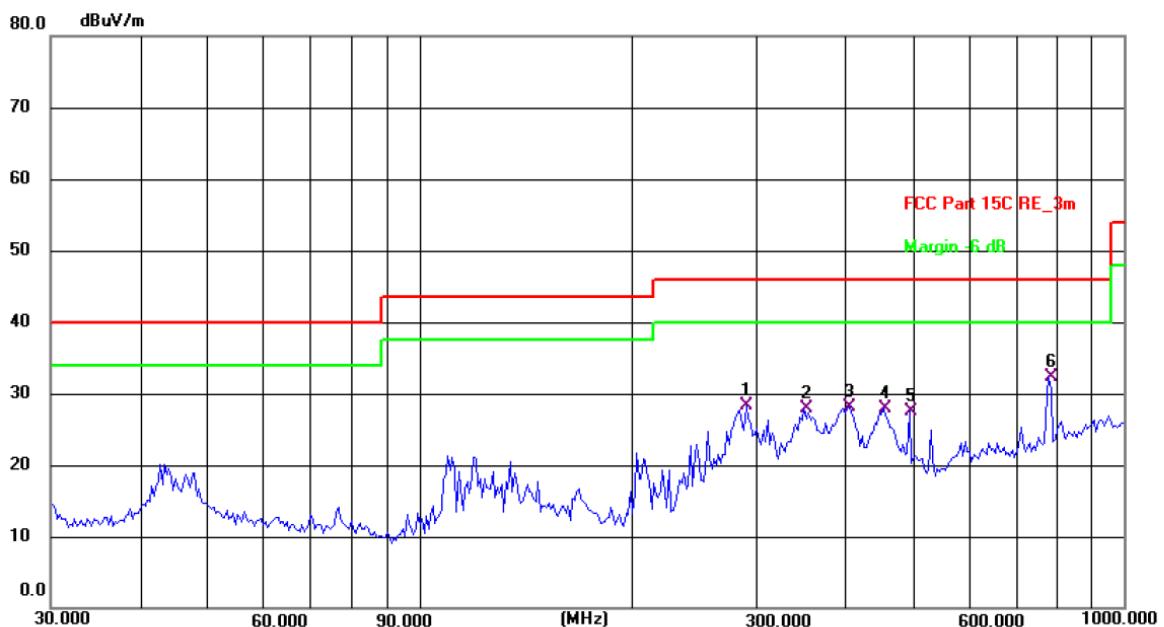

Site: 3m Anechoic Chamber1

Polarization: **Horizontal**


Temperature: 24.3(C) Humidity: 50 %

Limit: FCC Part 15C RE_3m

Power: DC 5 V (Notebook Computer Input AC 120 V/ 60Hz)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	291.0358	39.55	-11.28	28.27	46.00	-17.73	QP	P	
2	351.7079	38.09	-10.12	27.97	46.00	-18.03	QP	P	
3	407.5144	37.21	-9.03	28.18	46.00	-17.82	QP	P	
4	455.9058	36.06	-8.22	27.84	46.00	-18.16	QP	P	
5	495.9344	35.17	-7.71	27.46	46.00	-18.54	QP	P	
6 *	782.3453	35.20	-2.99	32.21	46.00	-13.79	QP	P	

Vertical:

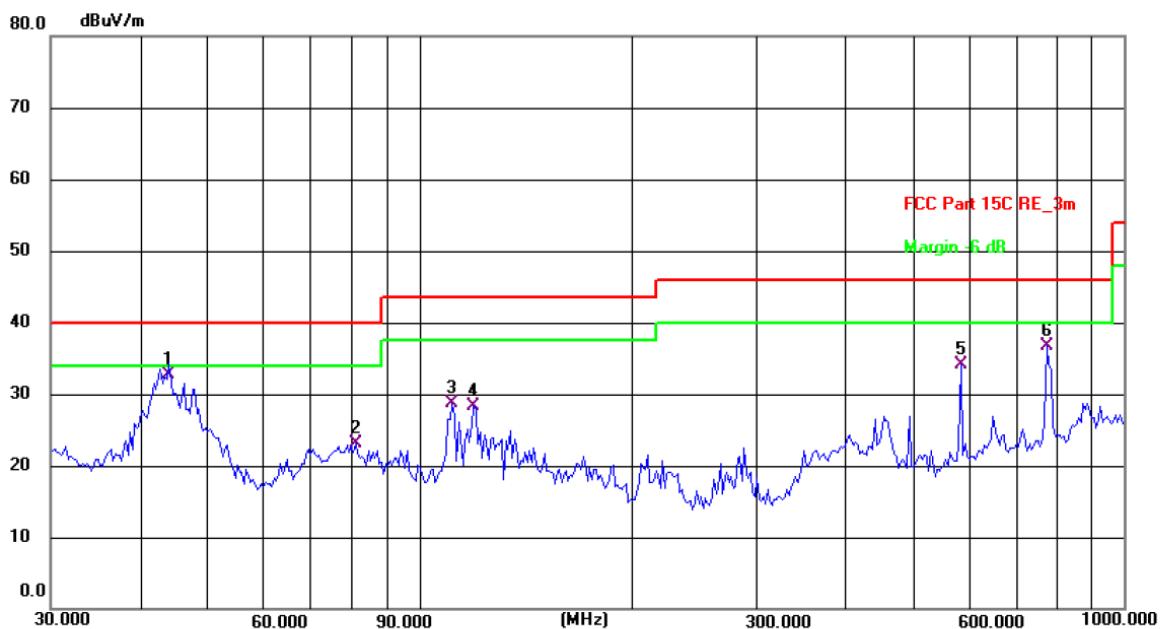

Site: 3m Anechoic Chamber1

Polarization: *Vertical*

Temperature: 24.3(C) Humidity: 50 %

Limit: FCC Part 15C RE_3m

Power: DC 5 V (Notebook Computer Input AC 120 V/ 60Hz)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	44.1200	44.99	-12.30	32.69	40.00	-7.31	QP	P	
2	81.2116	39.38	-16.21	23.17	40.00	-16.83	QP	P	
3	111.3468	43.16	-14.52	28.64	43.50	-14.86	QP	P	
4	119.4360	41.81	-13.46	28.35	43.50	-15.15	QP	P	
5	586.8436	39.88	-5.69	34.19	46.00	-11.81	QP	P	
6	776.8777	39.79	-3.06	36.73	46.00	-9.27	QP	P	

Note:

Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

Appendix B: Photographs of Test Setup

Please refer to document Appendix No.: TCT250513E016-A

Appendix C: Photographs of EUT

Please refer to document Appendix No.: TCT250513E016-B & TCT250513E016-C

*******END OF REPORT*******