

Transmitter Radiated Bandedge Emissions (with Antenna)

U-NII 5150-5250MHz Transmitter Radiated Bandedge (with Antenna)										
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11a	2	5180	3	5149.600	60.26	74	5147.200	46.16	54	H
11a	2	5240	3	5395.200	61.19	74	5390.400	49.36	54	H
HT20	2	5180	3	5147.400	64.31	74	5149.800	47.53	54	H
HT20	2	5240	3	5468.800	62.06	74	5396.000	49.88	54	H
HT40	2	5190	3	5149.940	66.24	74	5149.940	51.16	54	H
HT40	2	5230	3	5149.800	61.93	74	5149.800	48.14	54	H
VHT80	2	5210	3	5142.000	68.24	74	5146.200	52.65	54	H
Note 1: Measurement worst emissions of receive antenna polarization.										


U-NII 5250-5350MHz Transmitter Radiated Bandedge (with Antenna)										
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11a	2	5260	3	5416.140	61.43	74	5412.060	49.95	54	H
11a	2	5320	3	5353.600	62.78	74	5352.200	47.28	54	H
HT20	2	5260	3	5111.160	60.05	74	5109.120	48.24	54	H
HT20	2	5320	3	5351.500	62.27	74	5350.800	47.01	54	H
HT40	2	5270	3	5352.000	65.97	74	5350.200	50.84	54	H
HT40	2	5310	3	5350.840	68.42	74	5350.030	52.58	54	H
VHT80	2	5290	3	5350.200	67.42	74	5355.600	52.82	54	H
Note 1: Measurement worst emissions of receive antenna polarization.										

U-NII 5470-5725MHz Transmitter Radiated Bandedge (with Antenna)										
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11a	2	5500	3	5469.520	66.68	68.2	5459.280	46.37	54	H
11a	2	5700	3	5725.400	66.85	68.2	5725.160	52.00	68.2	H
HT20	2	5500	3	5467.760	66.59	68.2	5459.120	50.06	54	H
HT20	2	5700	3	5725.640	66.68	68.2	5725.640	46.58	68.2	H
HT40	2	5510	3	5467.200	66.79	68.2	5459.400	46.92	54	H
HT40	2	5670	3	5729.200	66.73	68.2	5725.200	52.20	68.2	H
VHT80	2	5530	3	5463.600	66.30	68.2	5459.600	51.11	54	H
Note 1: Measurement worst emissions of receive antenna polarization.										

U-NII 5725-5850MHz Transmitter Radiated Bandedge (with Antenna)							
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Pol.
11a	2	5745	3	5979.350	61.90	68.2	H
11a	2	5825	3	6052.690	61.50	68.2	H
HT20	2	5745	3	5648.250	61.65	68.2	H
HT20	2	5825	3	6060.100	61.02	68.2	H
HT40	2	5755	3	5648.600	66.94	68.2	H
HT40	2	5795	3	5931.840	67.12	68.2	H
VHT80	2	5775	3	5934.800	67.04	68.2	H
Note 1: Measurement worst emissions of receive antenna polarization.							

Transmitter Radiated Bandedge Emissions


Modulation Mode	11a	Test Freq. (MHz)	5180
N _{TX}	2	Remark	Average

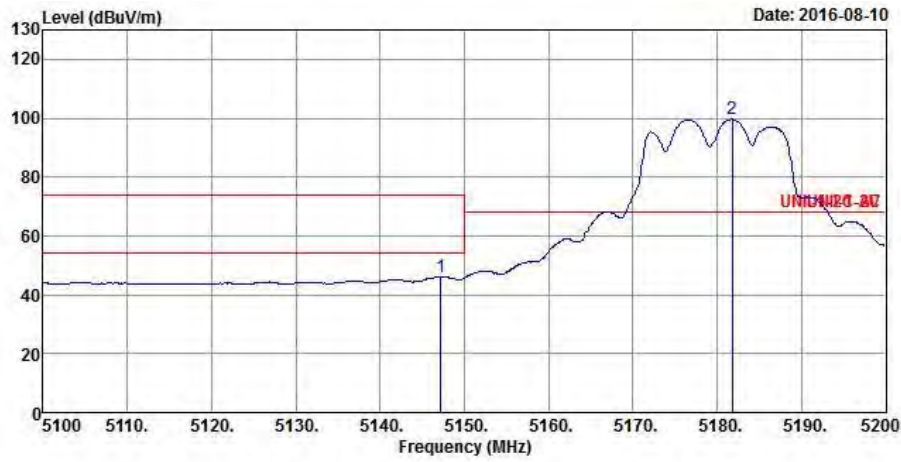

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	5147.200	46.16	-7.84	54.00	43.34	31.58	5.78	34.54	Average
2 *	5181.800	99.58			96.71	31.62	5.79	34.54	Average

Transmitter Radiated Bandedge Emissions


Modulation Mode	11a	Test Freq. (MHz)	5180
N _{TX}	2	Remark	Peak

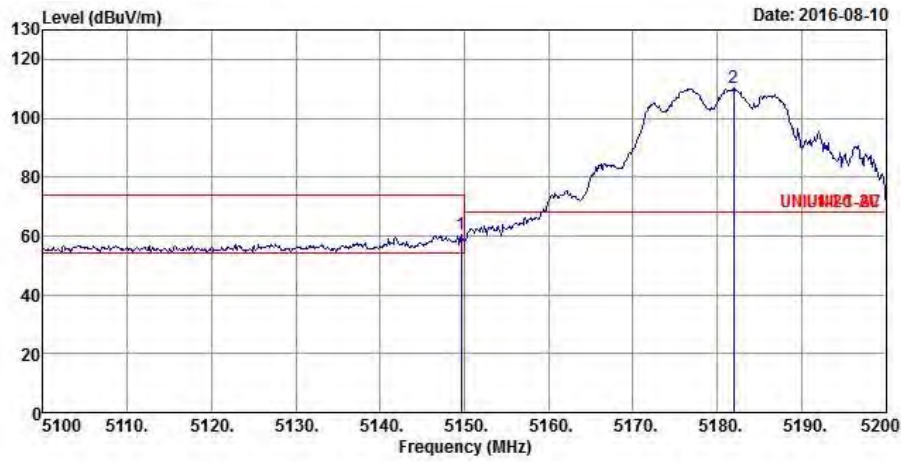

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB
1	5149.600	60.26	-13.74	74.00	57.44	31.58	5.78	34.54 Peak
2 *	5182.000	110.11			107.24	31.62	5.79	34.54 Peak

Transmitter Radiated Bandedge Emissions


Modulation Mode	11a	Test Freq. (MHz)	5200
N _{TX}	2	Remark	Average

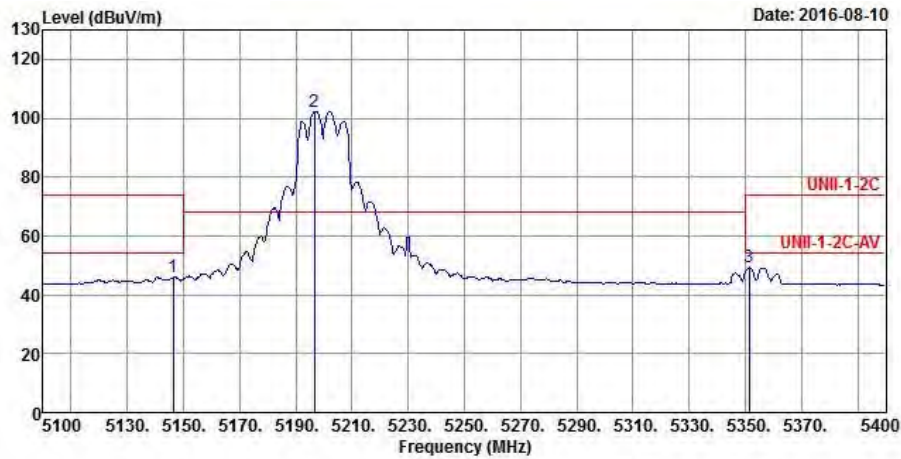

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	5146.200	45.96	-8.04	54.00	43.14	31.58	5.78	34.54 Average
2 *	5196.600	102.37			99.47	31.64	5.79	34.53 Average
3	5351.400	49.17	-4.83	54.00	46.10	31.82	5.77	34.52 Average

Transmitter Radiated Bandedge Emissions


Modulation Mode	11a	Test Freq. (MHz)	5200
N _{TX}	2	Remark	Peak

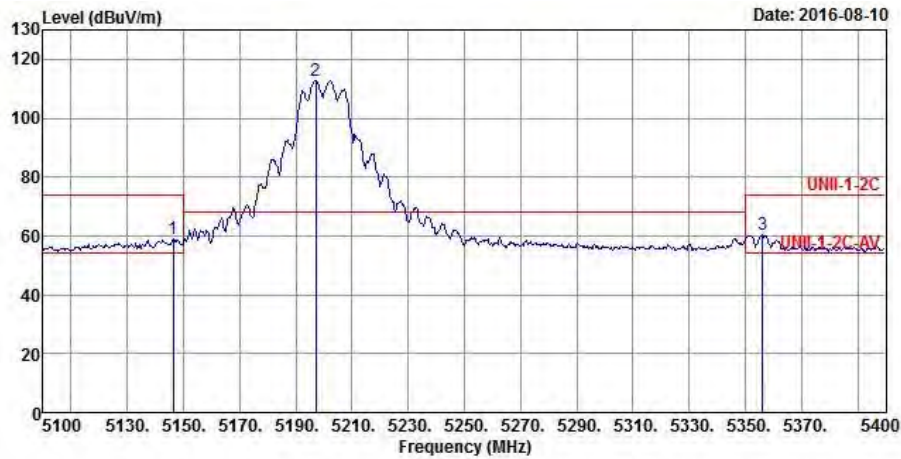

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	5146.200	59.02	-14.98	74.00	56.20	31.58	5.78	34.54 Peak
2 *	5197.200	112.77			109.87	31.64	5.79	34.53 Peak
3	5356.200	60.24	-13.76	74.00	57.16	31.83	5.77	34.52 Peak

Transmitter Radiated Bandedge Emissions


Modulation Mode	11a	Test Freq. (MHz)	5240
N _{TX}	2	Remark	Average

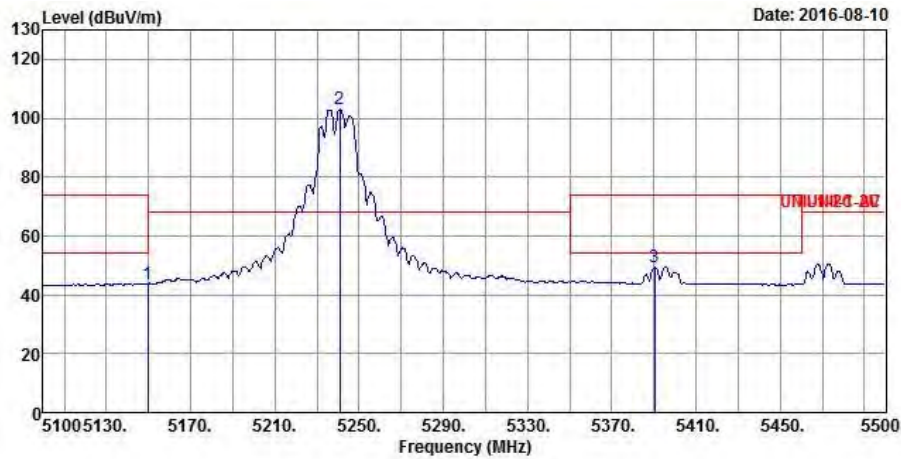


	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp			
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	5149.600	43.77	-10.23	54.00	40.95	31.58	5.78	34.54	Average
2 *	5240.800	102.91			99.96	31.69	5.79	34.53	Average
3	5390.400	49.36	-4.64	54.00	46.24	31.87	5.77	34.52	Average

Transmitter Radiated Bandedge Emissions

Modulation Mode	11a	Test Freq. (MHz)	5240
N _{TX}	2	Remark	Peak

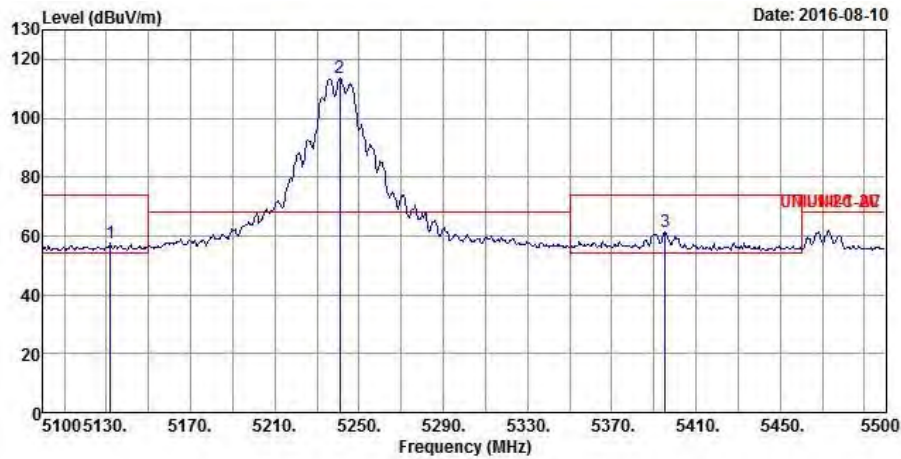


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	5132.000	57.76	-16.24	74.00	54.97	31.56	5.77	34.54 Peak
2 *	5240.800	113.52			110.57	31.69	5.79	34.53 Peak
3	5395.200	61.19	-12.81	74.00	58.07	31.87	5.77	34.52 Peak

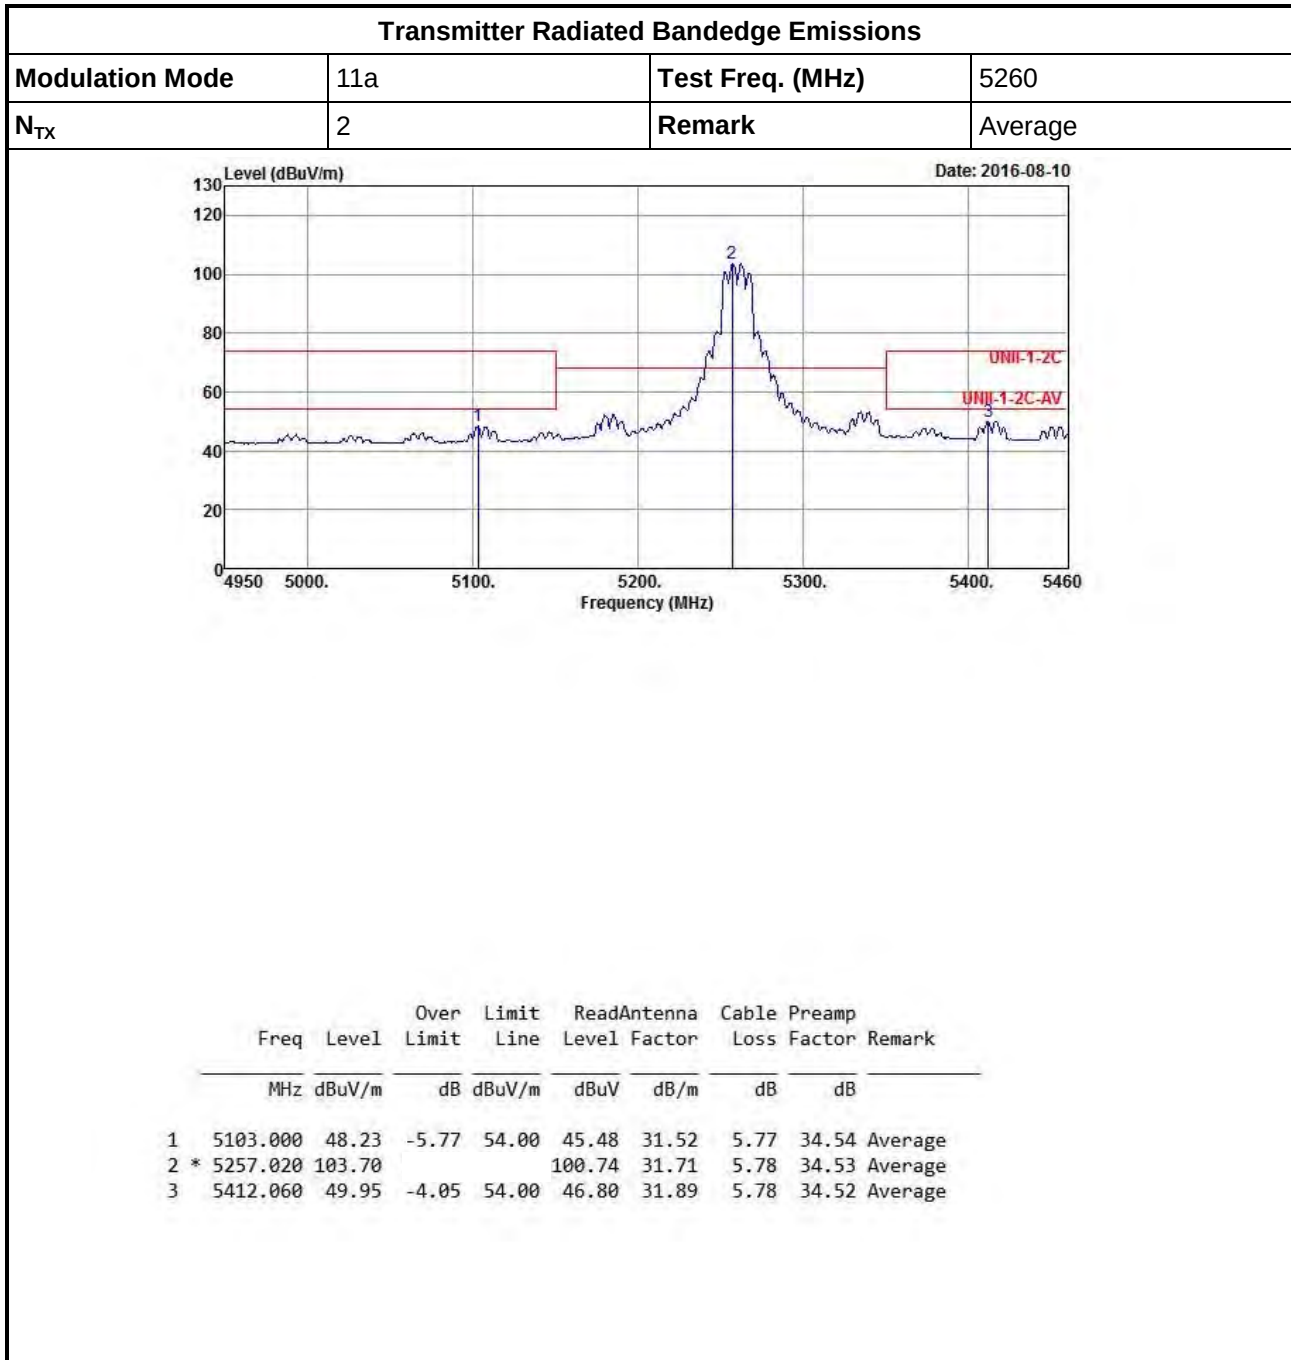

Transmitter Radiated Bandedge Emissions


Modulation Mode	11a	Test Freq. (MHz)	5260
N _{TX}	2	Remark	Peak

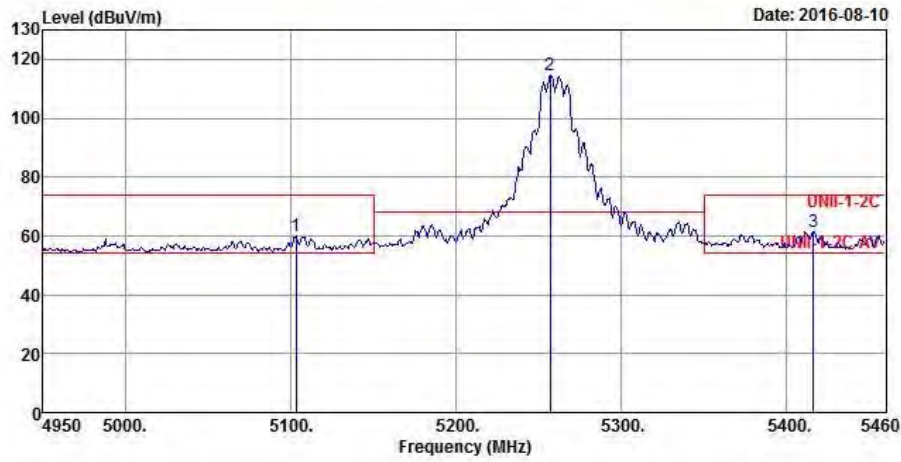

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB	dB	
1	5103.000	59.80	-14.20	74.00	57.05	31.52	5.77	34.54 Peak
2 *	5257.020	114.54			111.58	31.71	5.78	34.53 Peak
3	5416.140	61.43	-12.57	74.00	58.26	31.90	5.79	34.52 Peak

Transmitter Radiated Bandedge Emissions


Modulation Mode	11a	Test Freq. (MHz)	5300
N _{TX}	2	Remark	Average

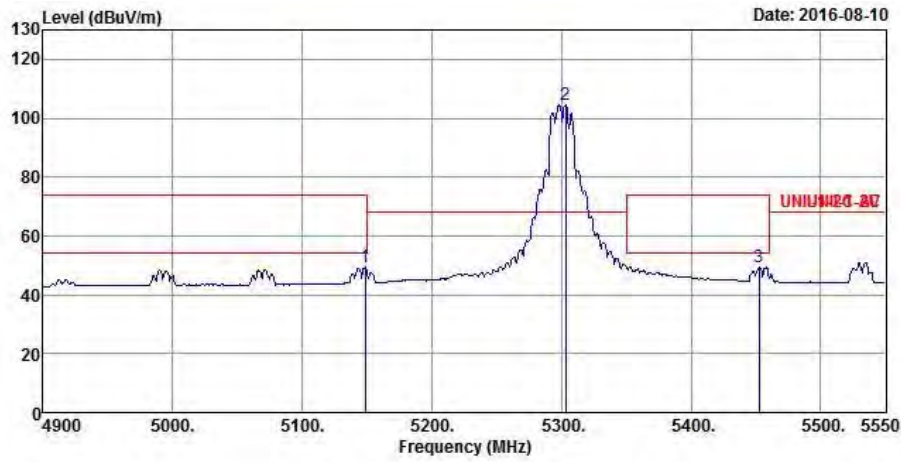

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB	dB	
1	5148.300	49.36	-4.64	54.00	46.54	31.58	5.78	34.54 Average
2 *	5303.000	104.68			101.67	31.76	5.78	34.53 Average
3	5452.500	49.52	-4.48	54.00	46.27	31.94	5.82	34.51 Average

Transmitter Radiated Bandedge Emissions


Modulation Mode	11a	Test Freq. (MHz)	5300
N _{TX}	2	Remark	Peak

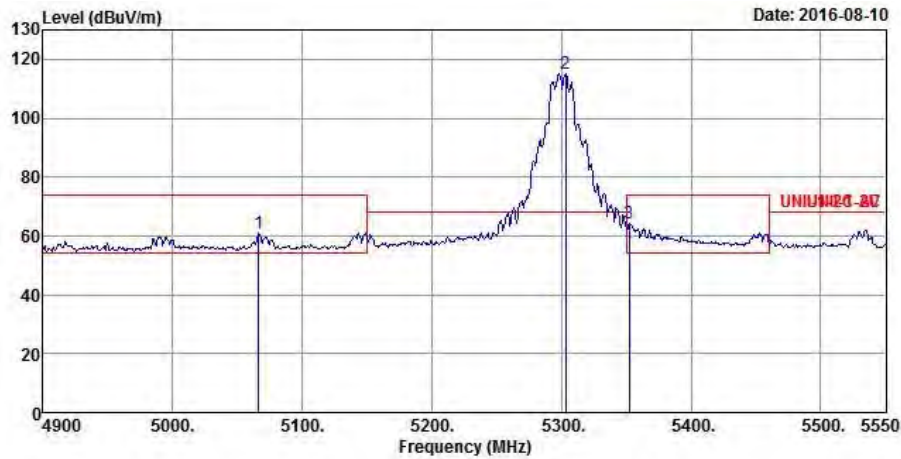

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB	dB	
1	5066.400	61.12	-12.88	74.00	58.42	31.48	5.76	34.54 Peak
2 *	5303.000	115.03			112.02	31.76	5.78	34.53 Peak
3	5352.400	64.09	-9.91	74.00	61.02	31.82	5.77	34.52 Peak

Transmitter Radiated Bandedge Emissions


Modulation Mode	11a	Test Freq. (MHz)	5320
N _{TX}	2	Remark	Average

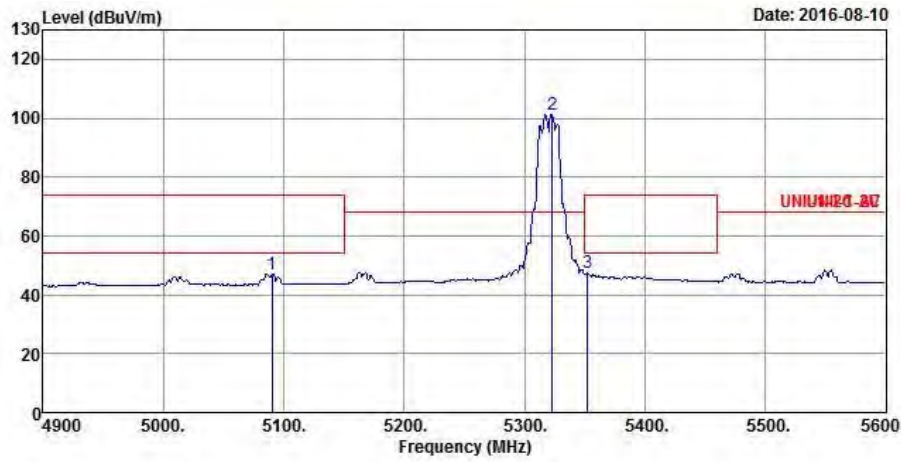

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB	dB	
1	5090.400	47.22	-6.78	54.00	44.49	31.51	5.76	34.54 Average
2 *	5322.800	101.31			98.26	31.79	5.78	34.52 Average
3	5352.200	47.28	-6.72	54.00	44.21	31.82	5.77	34.52 Average

Transmitter Radiated Bandedge Emissions


Modulation Mode	11a	Test Freq. (MHz)	5320
N _{TX}	2	Remark	Peak

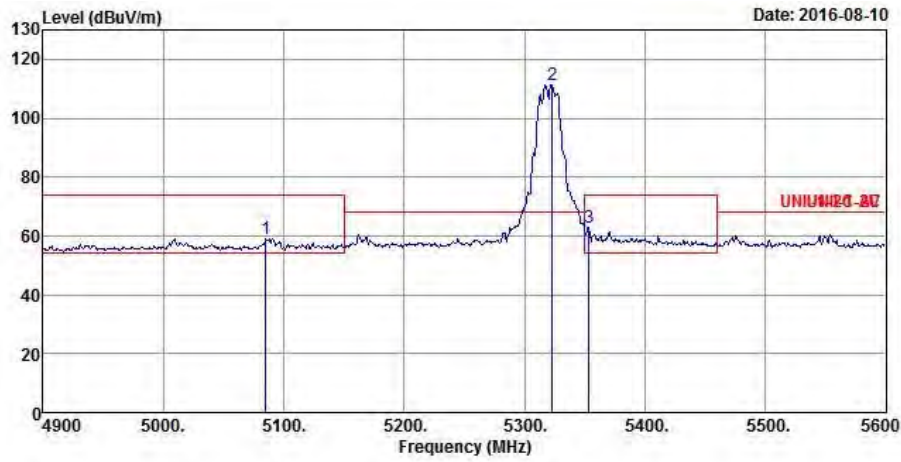

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB
1	5084.800	59.01	-14.99	74.00	56.29	31.50	5.76	34.54 Peak
2 *	5322.800	111.49			108.44	31.79	5.78	34.52 Peak
3	5353.600	62.78	-11.22	74.00	59.71	31.82	5.77	34.52 Peak

Transmitter Radiated Bandedge Emissions


Modulation Mode	11a	Test Freq. (MHz)	5500
N _{TX}	2	Remark	Average

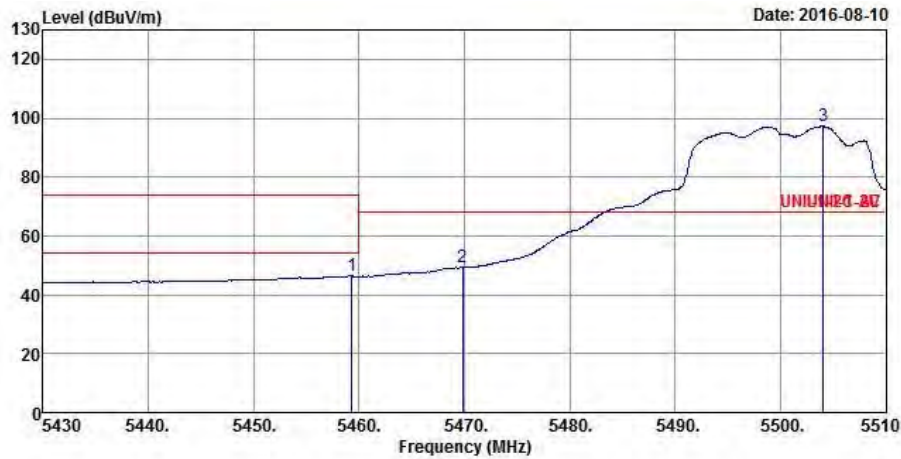

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	5459.280	46.37	-7.63	54.00	43.10	31.95	5.83	34.51 Average
2	5469.840	49.27	-18.93	68.20	45.98	31.96	5.84	34.51 Average
3 *	5504.080	97.35			93.99	32.00	5.87	34.51 Average

Transmitter Radiated Bandedge Emissions


Modulation Mode	11a	Test Freq. (MHz)	5500
N _{TX}	2	Remark	Peak

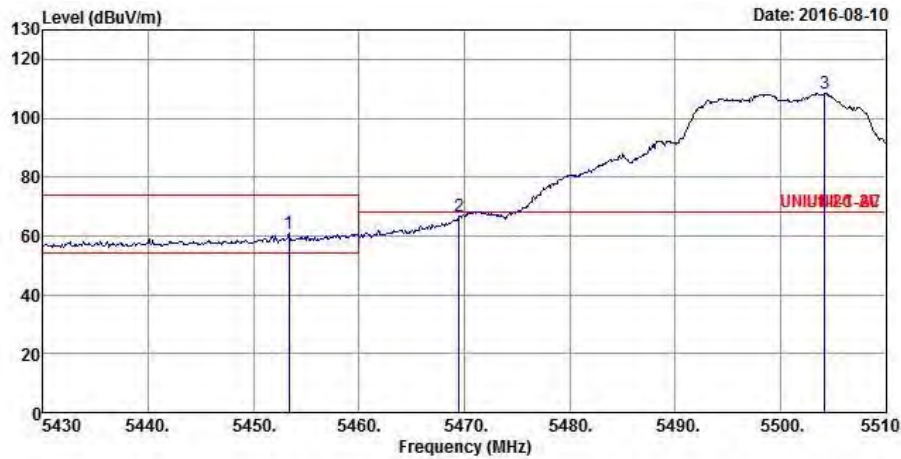

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Factor	Loss Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	5453.360	61.11	-12.89	74.00	57.86	31.94	5.82	34.51 Peak
2	5469.520	66.68	-1.52	68.20	63.39	31.96	5.84	34.51 Peak
3 *	5504.240	108.56			105.19	32.01	5.87	34.51 Peak

Transmitter Radiated Bandedge Emissions


Modulation Mode	11a	Test Freq. (MHz)	5580
N _{TX}	2	Remark	Average

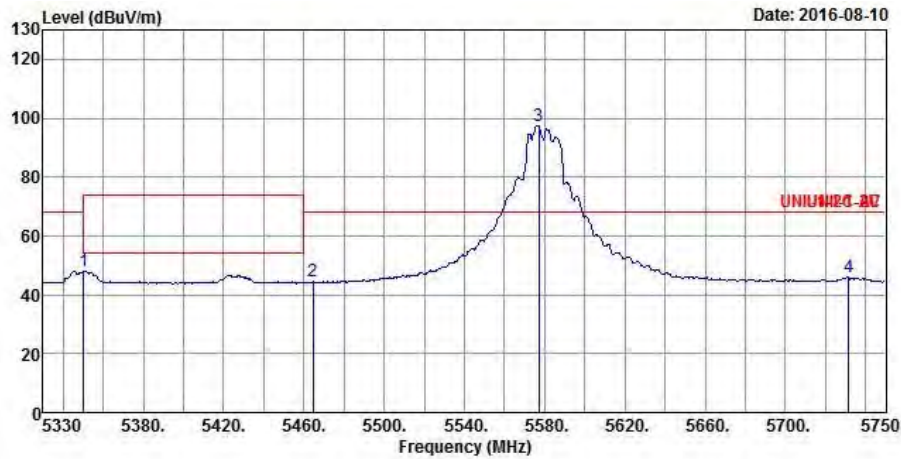

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	5350.160	47.97	-6.03	54.00	44.90	31.82	5.77	34.52 Average
2	5464.400	44.47	-23.73	68.20	41.19	31.96	5.83	34.51 Average
3 *	5576.960	97.52			94.01	32.09	5.95	34.53 Average
4	5731.520	45.91	-22.29	68.20	42.32	32.28	5.88	34.57 Average

Transmitter Radiated Bandedge Emissions


Modulation Mode	11a	Test Freq. (MHz)	5580
N _{TX}	2	Remark	Peak

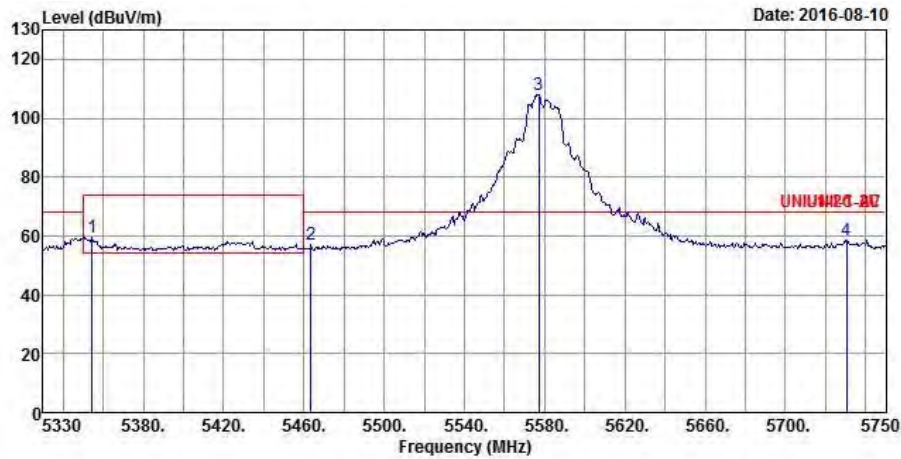

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB	dB	
1	5354.360	59.62	-14.38	74.00	56.54	31.83	5.77	34.52 Peak
2	5463.560	56.89	-11.31	68.20	53.61	31.96	5.83	34.51 Peak
3 *	5576.960	108.03			104.52	32.09	5.95	34.53 Peak
4	5730.680	58.73	-9.47	68.20	55.14	32.28	5.88	34.57 Peak

Transmitter Radiated Bandedge Emissions


Modulation Mode	11a	Test Freq. (MHz)	5700
N _{TX}	2	Remark	Average

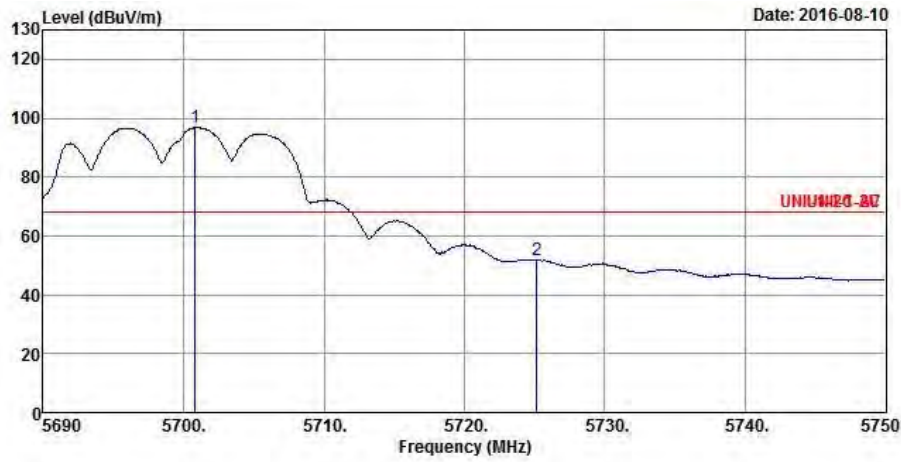

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 *	5700.800	96.76			93.19	32.24	5.90	34.57	Average
2	5725.160	52.00	-16.20	68.20	48.42	32.27	5.88	34.57	Average

Transmitter Radiated Bandedge Emissions


Modulation Mode	11a	Test Freq. (MHz)	5700
N _{TX}	2	Remark	Peak

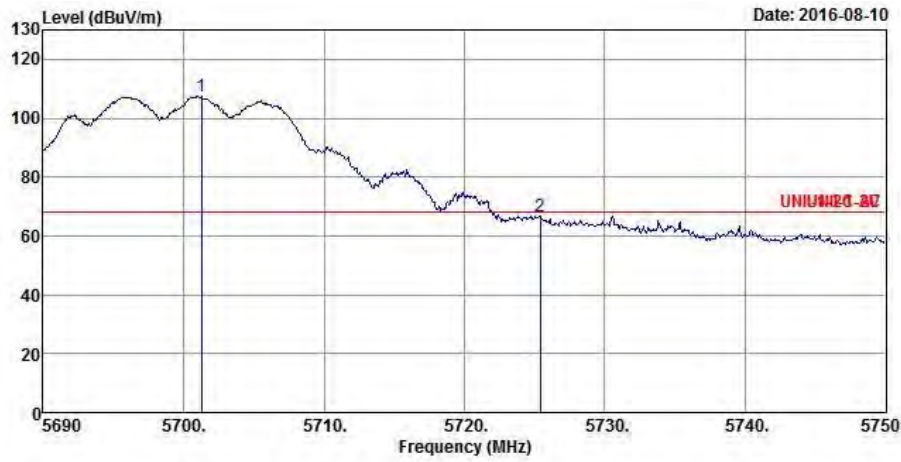

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB
1 *	5701.280	107.40			103.83	32.24	5.90	34.57 Peak
2	5725.400	66.85	-1.35	68.20	63.27	32.27	5.88	34.57 Peak

Transmitter Radiated Bandedge Emissions


Modulation Mode	11a	Test Freq. (MHz)	5745
N _{TX}	2	Remark	Average

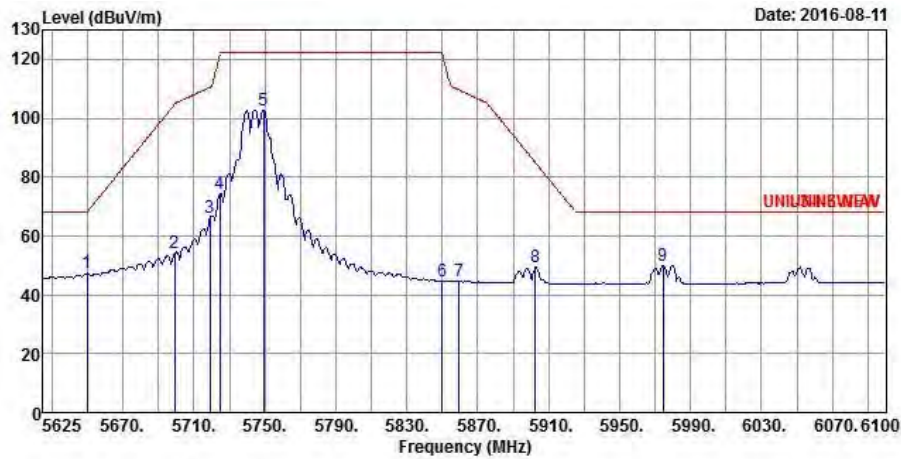


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	5649.700	47.25	-20.95	68.20	43.68	32.18	5.94	34.55 Average
2	5699.100	54.19	-50.35	104.54	50.62	32.24	5.90	34.57 Average
3	5719.050	66.34	-44.19	110.53	62.76	32.26	5.89	34.57 Average
4	5724.750	74.24	-47.39	121.63	70.66	32.27	5.88	34.57 Average
5	5749.450	102.89	-19.31	122.20	99.30	32.30	5.87	34.58 Average
6	5850.150	44.82	-77.04	121.86	41.24	32.42	5.77	34.61 Average
7	5859.650	44.73	-64.77	109.50	41.15	32.43	5.76	34.61 Average
8	5902.400	49.18	-35.71	84.89	45.60	32.48	5.72	34.62 Average
9	5974.600	50.07	-18.13	68.20	46.50	32.57	5.64	34.64 Average

Transmitter Radiated Bandedge Emissions

Modulation Mode	11a	Test Freq. (MHz)	5745
N _{TX}	2	Remark	Peak

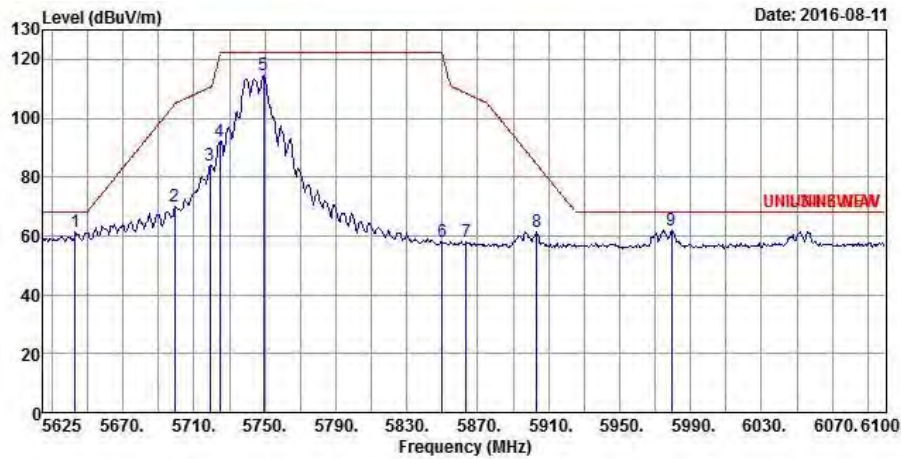


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB
1	5643.050	61.62	-6.58	68.20	58.06	32.17	5.94	34.55 Peak
2	5699.100	70.25	-34.29	104.54	66.68	32.24	5.90	34.57 Peak
3	5719.050	83.86	-26.67	110.53	80.28	32.26	5.89	34.57 Peak
4	5724.750	92.25	-29.38	121.63	88.67	32.27	5.88	34.57 Peak
5	5749.450	114.43	-7.77	122.20	110.84	32.30	5.87	34.58 Peak
6	5850.150	58.04	-63.82	121.86	54.46	32.42	5.77	34.61 Peak
7	5863.450	57.94	-50.49	108.43	54.35	32.44	5.76	34.61 Peak
8	5903.350	61.51	-22.67	84.18	57.93	32.48	5.72	34.62 Peak
9	5979.350	61.90	-6.30	68.20	58.33	32.58	5.63	34.64 Peak

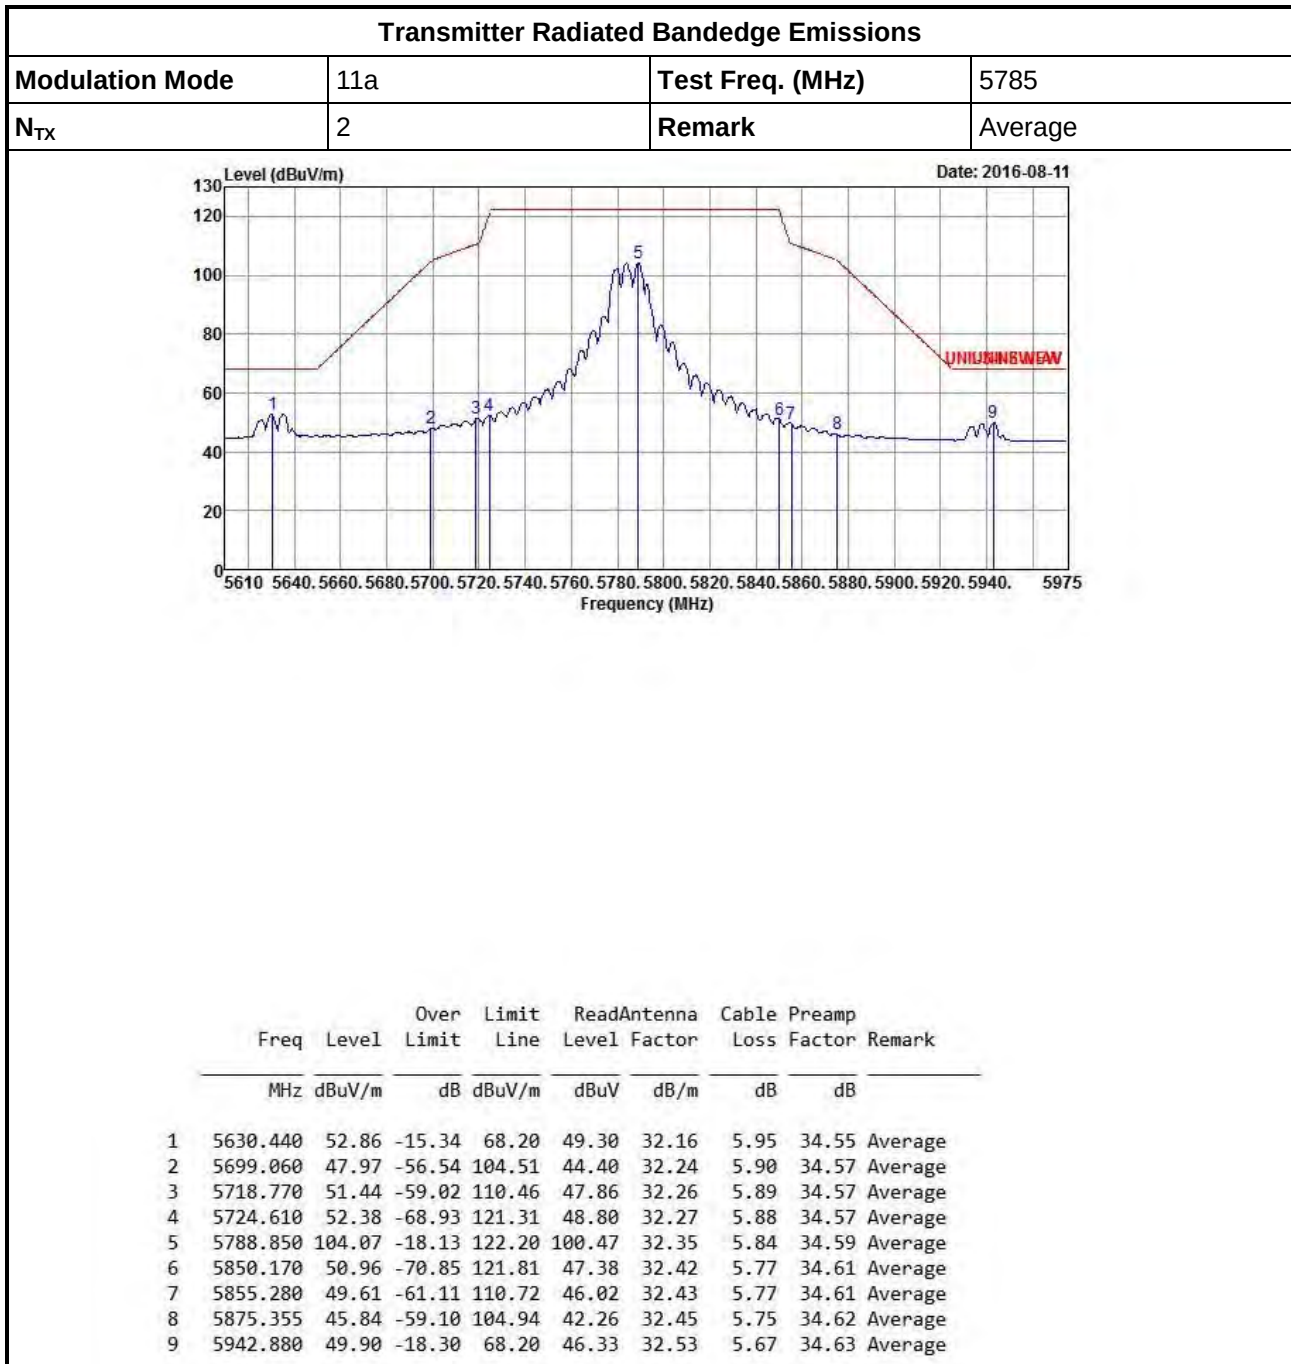

Transmitter Radiated Bandedge Emissions


Modulation Mode	11a	Test Freq. (MHz)	5785
N _{TX}	2	Remark	Peak

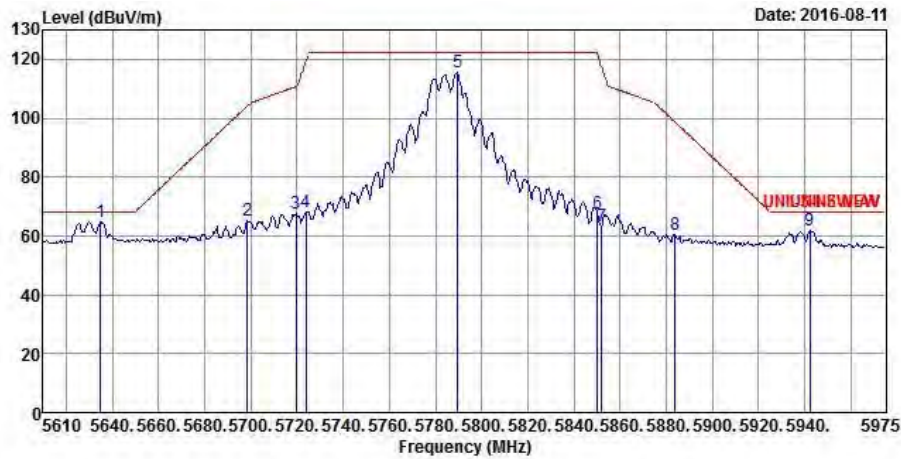

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB	dB	
1	5634.820	64.77	-3.43	68.20	61.21	32.16	5.95	34.55 Peak
2	5698.330	65.11	-38.86	103.97	61.54	32.24	5.90	34.57 Peak
3	5719.500	67.54	-43.12	110.66	63.96	32.26	5.89	34.57 Peak
4	5723.880	68.12	-51.53	119.65	64.54	32.27	5.88	34.57 Peak
5	5789.580	115.39	-6.81	122.20	111.79	32.35	5.84	34.59 Peak
6	5850.170	67.83	-53.98	121.81	64.25	32.42	5.77	34.61 Peak
7	5851.995	63.46	-54.19	117.65	59.88	32.42	5.77	34.61 Peak
8	5883.750	60.55	-38.15	98.70	56.97	32.46	5.74	34.62 Peak
9	5942.150	61.81	-6.39	68.20	58.24	32.53	5.67	34.63 Peak

Transmitter Radiated Bandedge Emissions


Modulation Mode	11a	Test Freq. (MHz)	5825
N _{TX}	2	Remark	Average

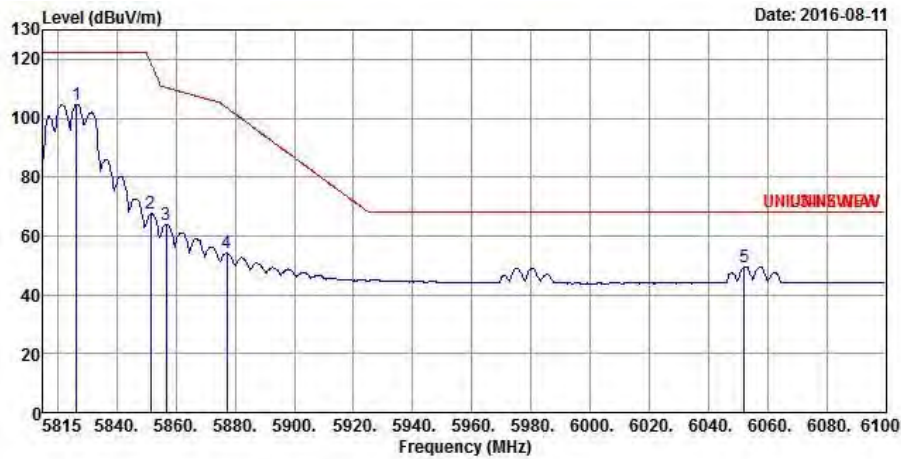


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	5826.400	104.65	-17.55	122.20	101.06	32.39	5.80	34.60
2	5851.480	67.58	-51.24	118.82	64.00	32.42	5.77	34.61
3	5856.610	64.01	-46.34	110.35	60.42	32.43	5.77	34.61
4	5877.130	54.06	-49.56	103.62	50.48	32.45	5.75	34.62
5	6052.120	49.61	-18.59	68.20	45.85	32.75	5.66	34.65


Transmitter Radiated Bandedge Emissions


Modulation Mode	11a	Test Freq. (MHz)	5825
N _{TX}	2	Remark	Peak

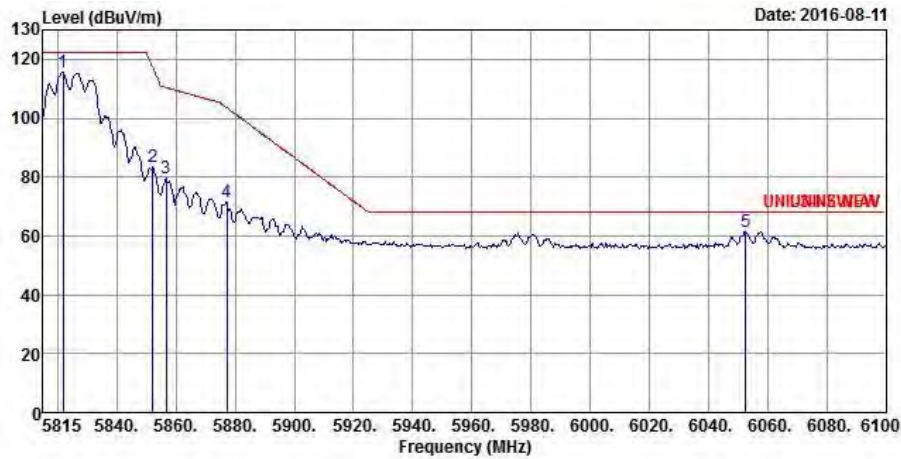

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	5821.840	115.50	-6.70	122.20	111.90	32.39	5.81	34.60 Peak
2	5852.050	83.48	-34.05	117.53	79.90	32.42	5.77	34.61 Peak
3	5856.610	79.75	-30.60	110.35	76.16	32.43	5.77	34.61 Peak
4	5877.130	71.68	-31.94	103.62	68.10	32.45	5.75	34.62 Peak
5	6052.690	61.50	-6.70	68.20	57.74	32.75	5.66	34.65 Peak

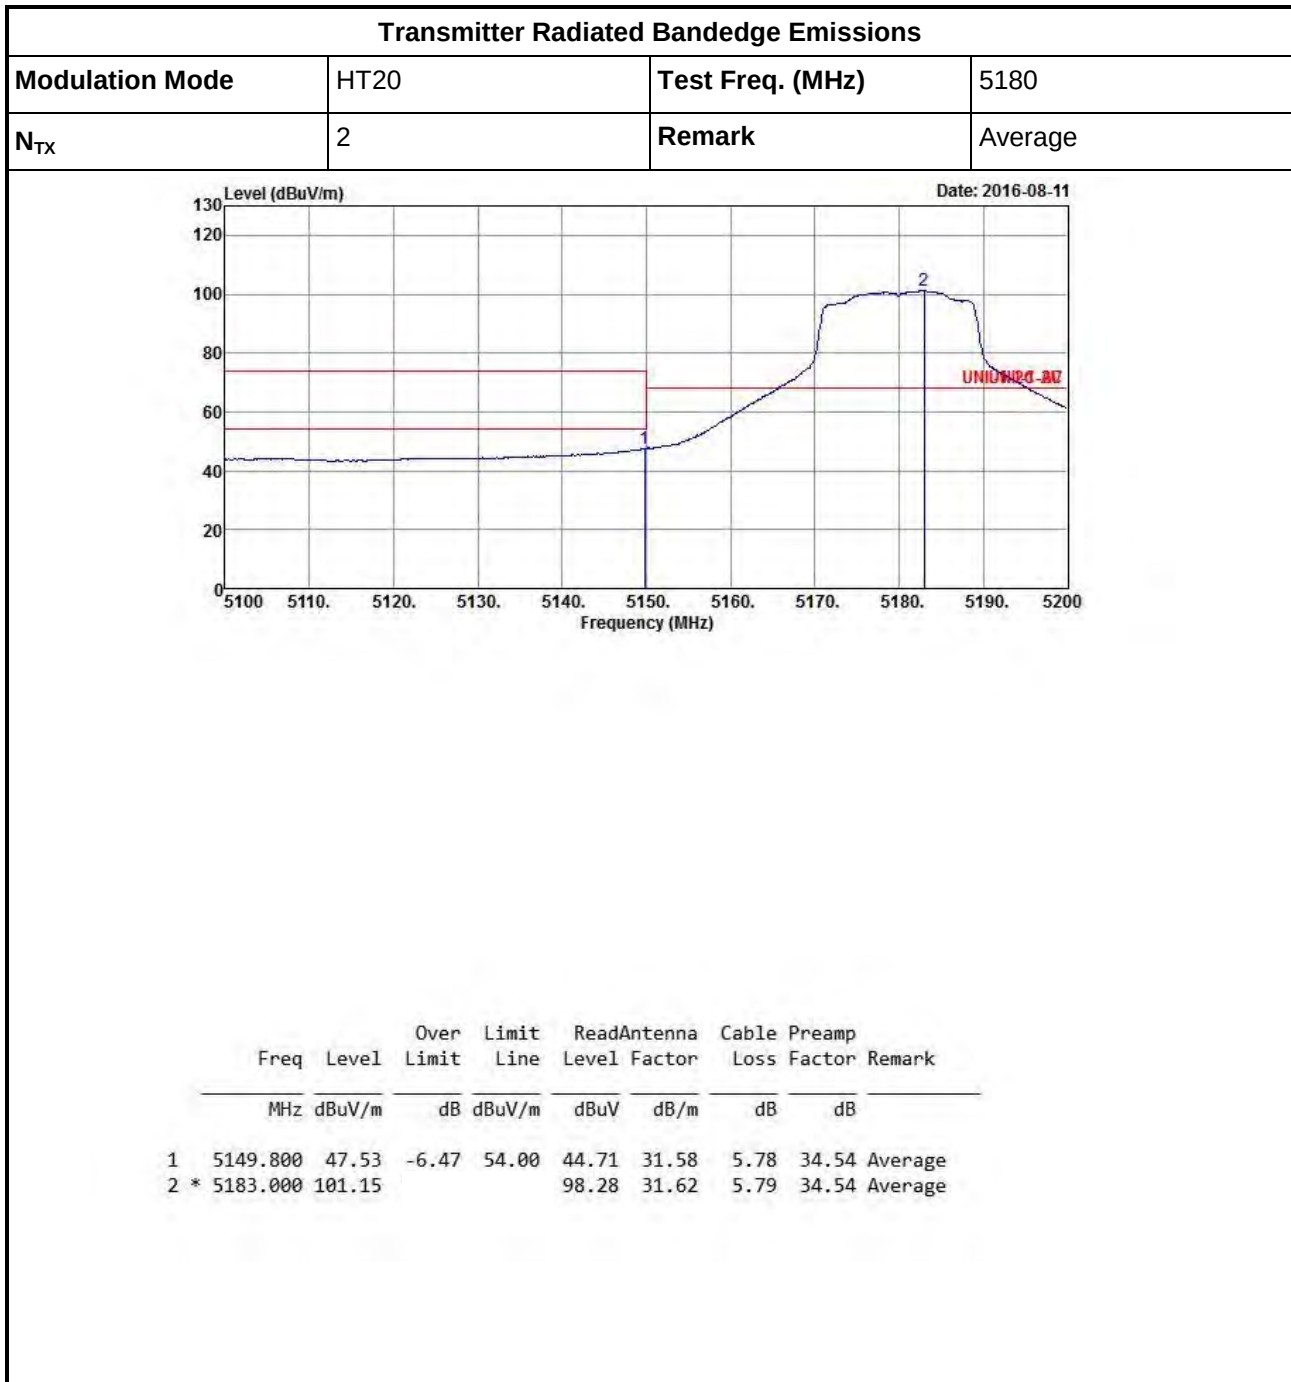


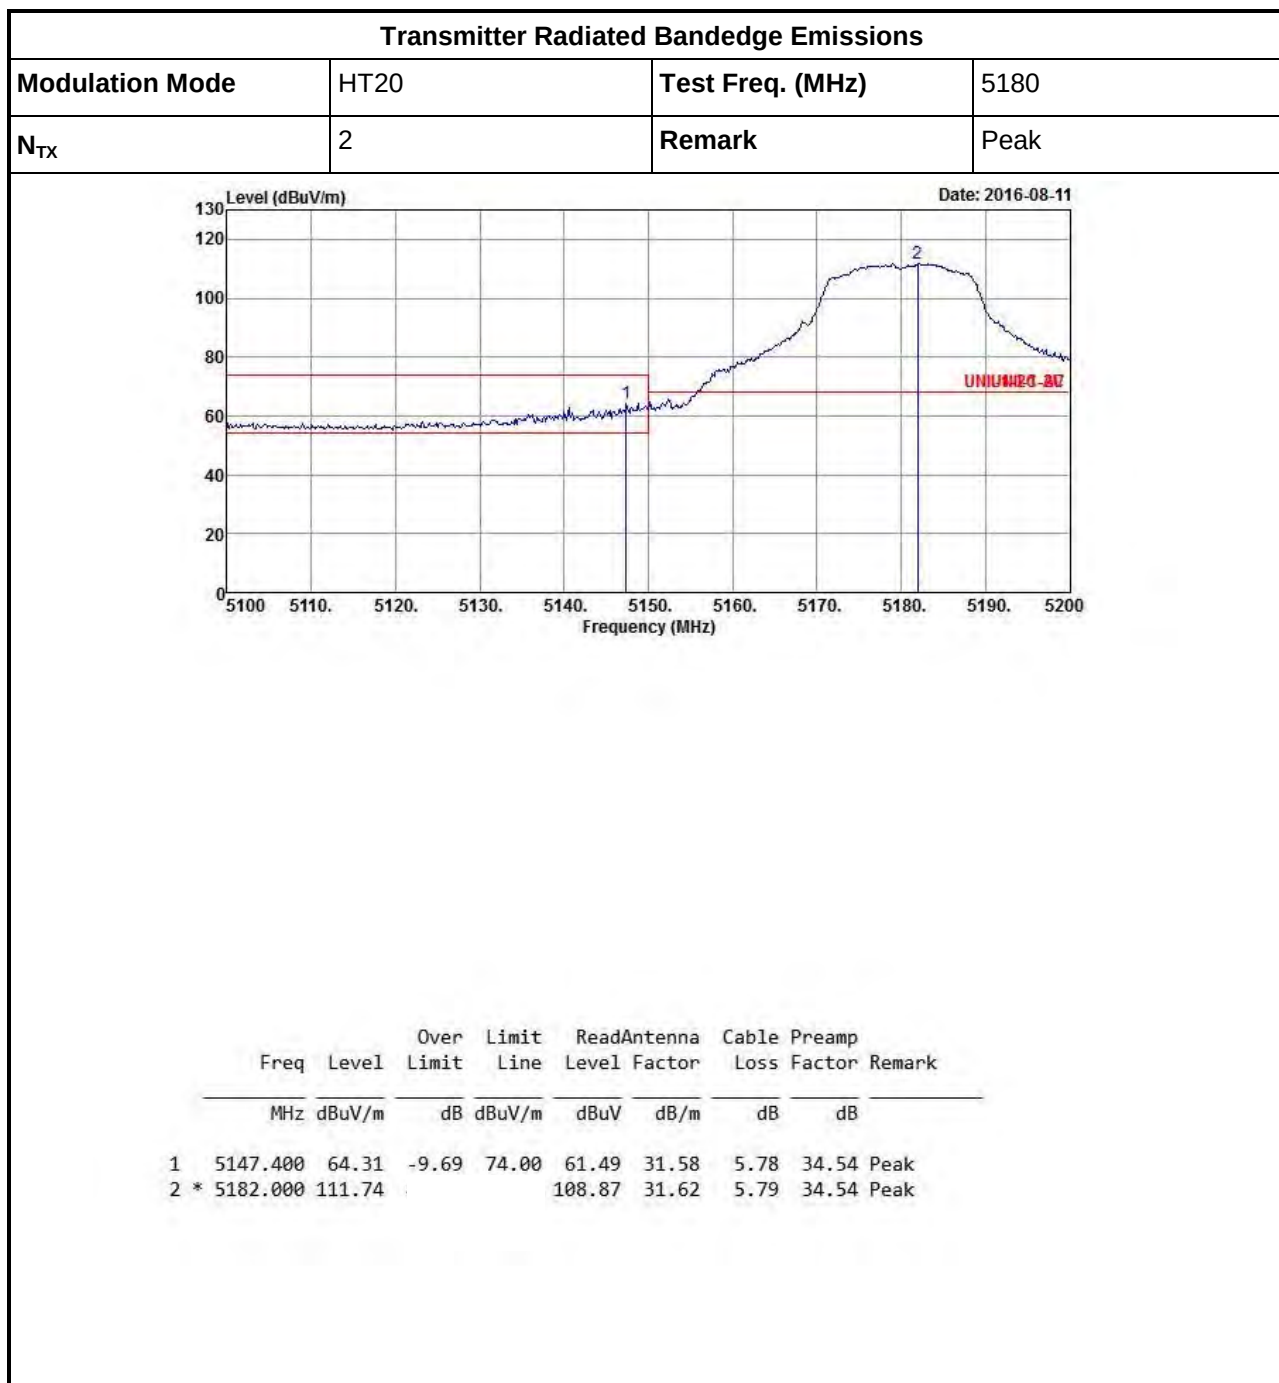

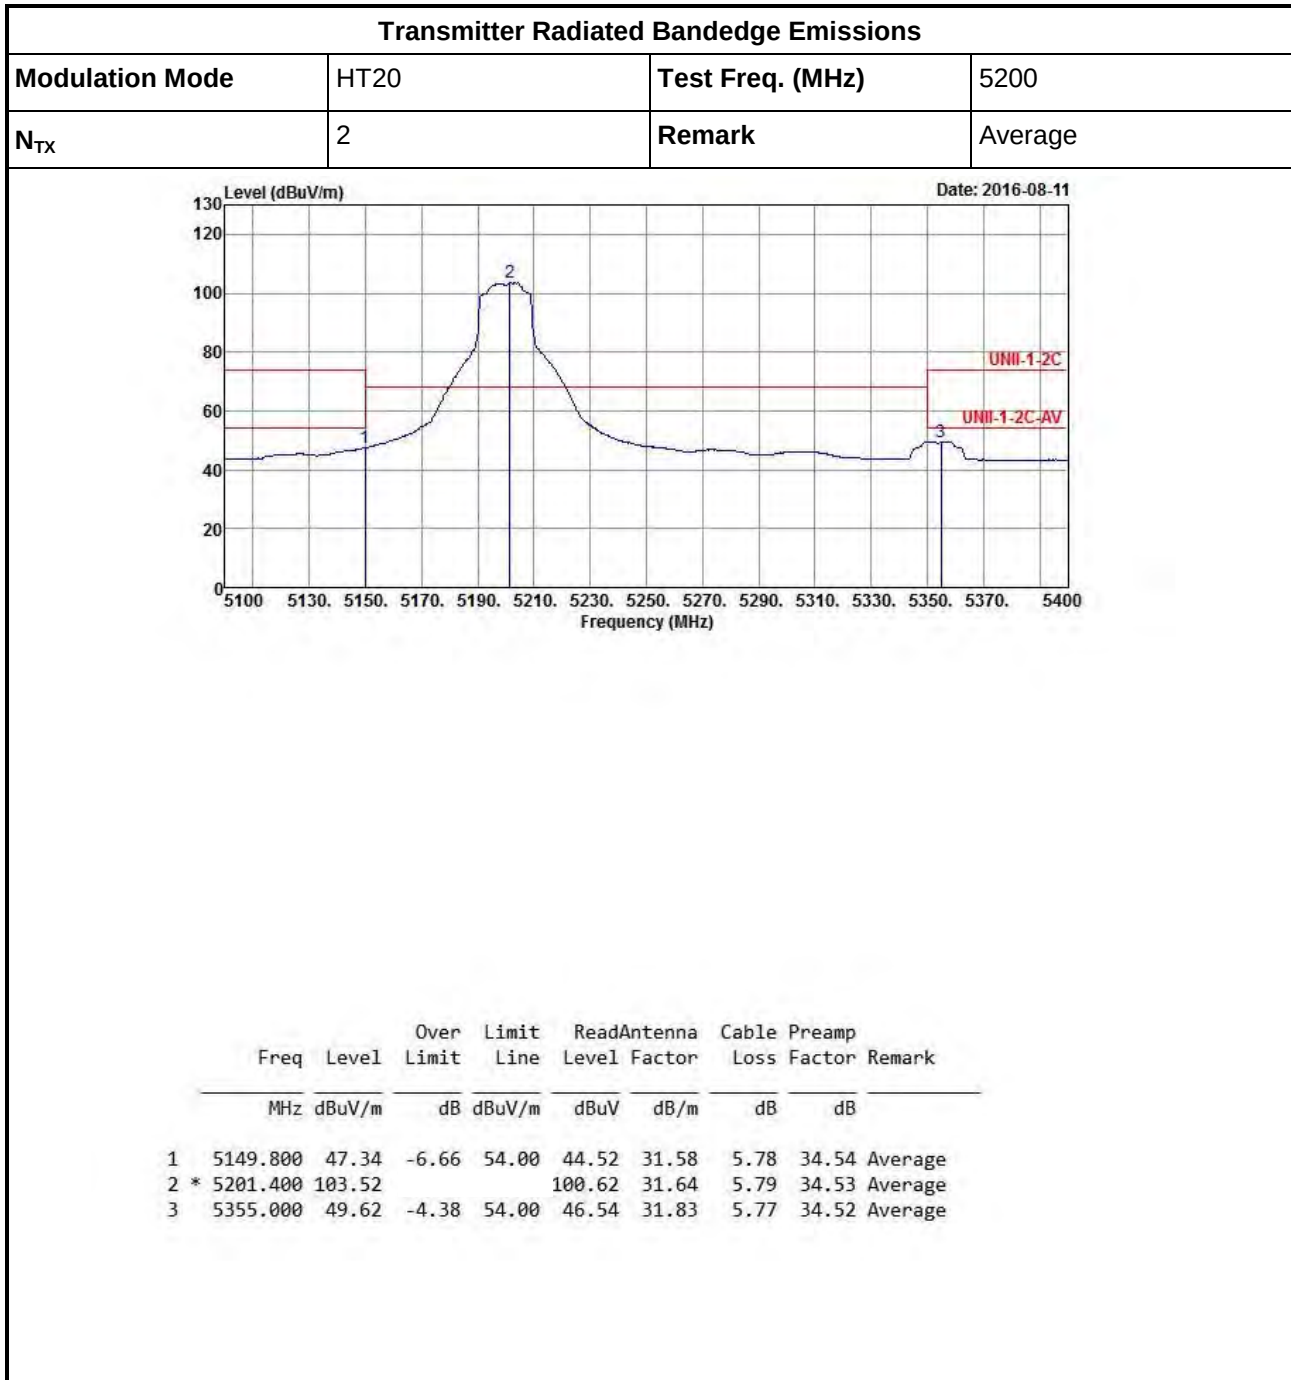



Transmitter Radiated Bandedge Emissions

Modulation Mode	HT20	Test Freq. (MHz)	5200
N _{TX}	2	Remark	Peak

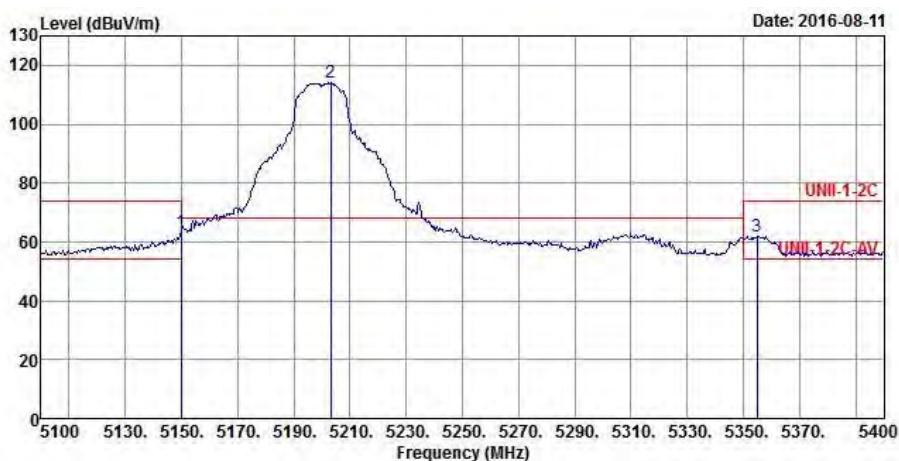


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	5149.800	63.43	-10.57	74.00	60.61	31.58	5.78	34.54	Peak
2 *	5203.200	114.08			111.18	31.64	5.79	34.53	Peak
3	5355.000	61.90	-12.10	74.00	58.82	31.83	5.77	34.52	Peak

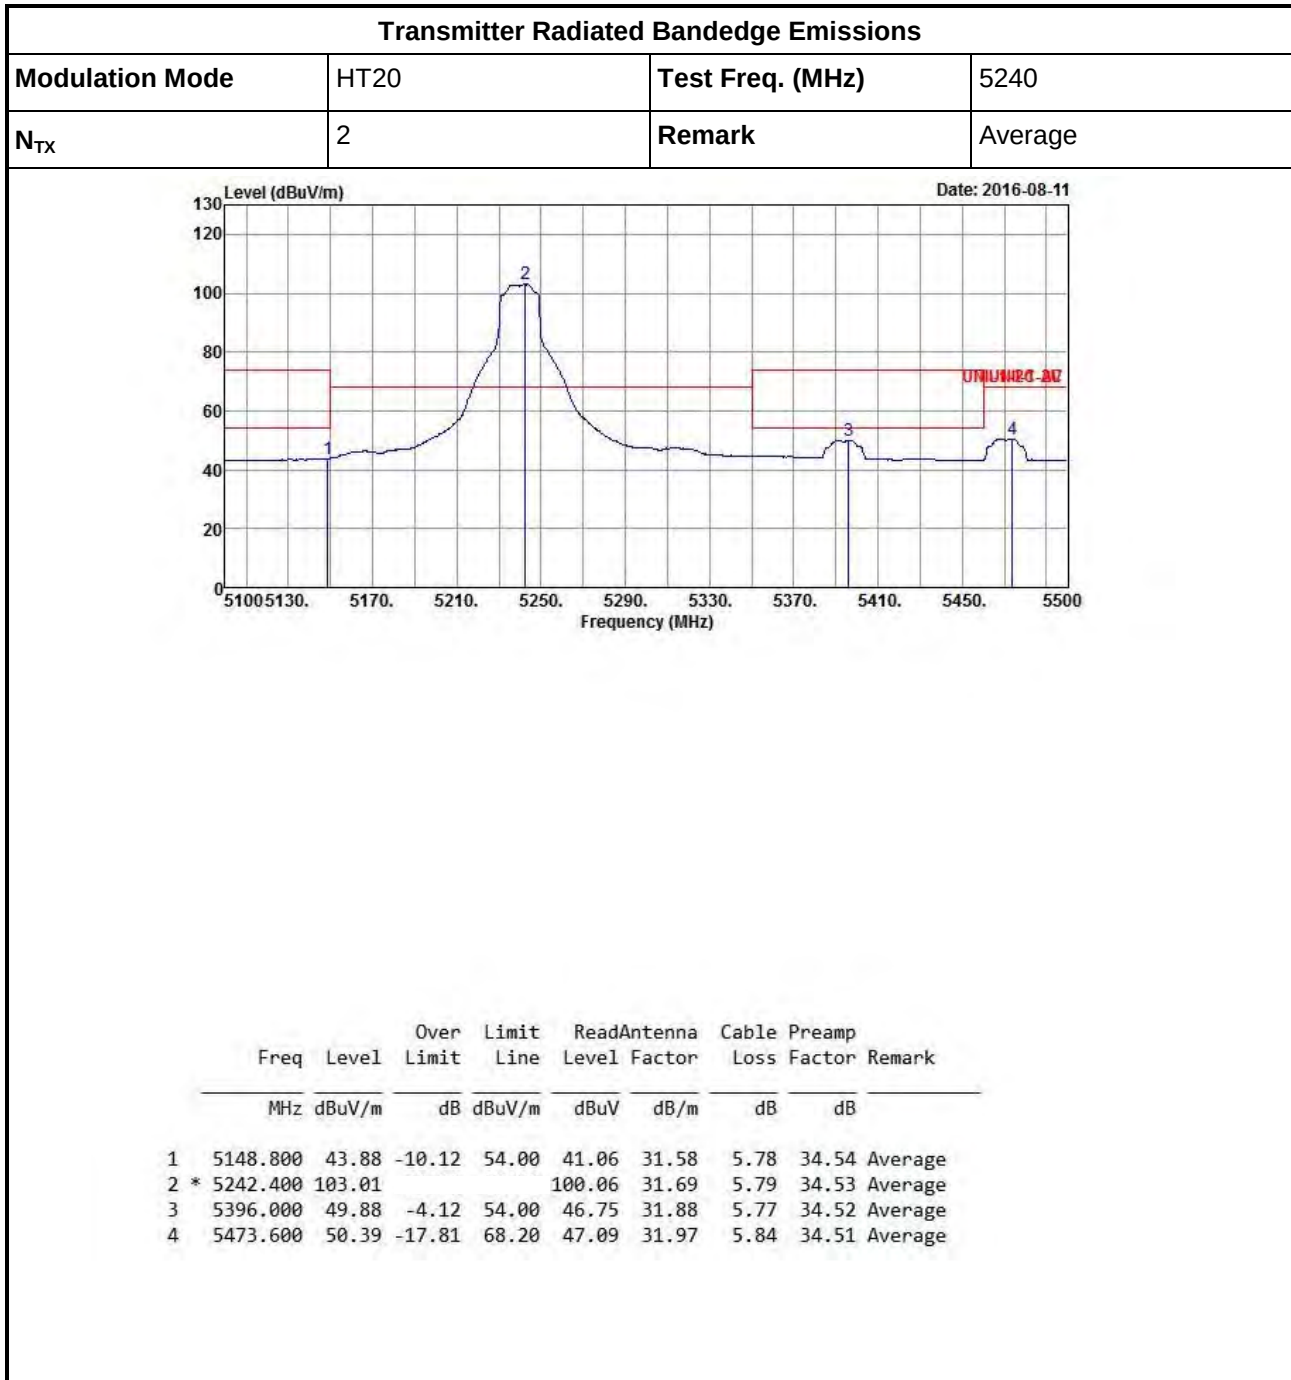

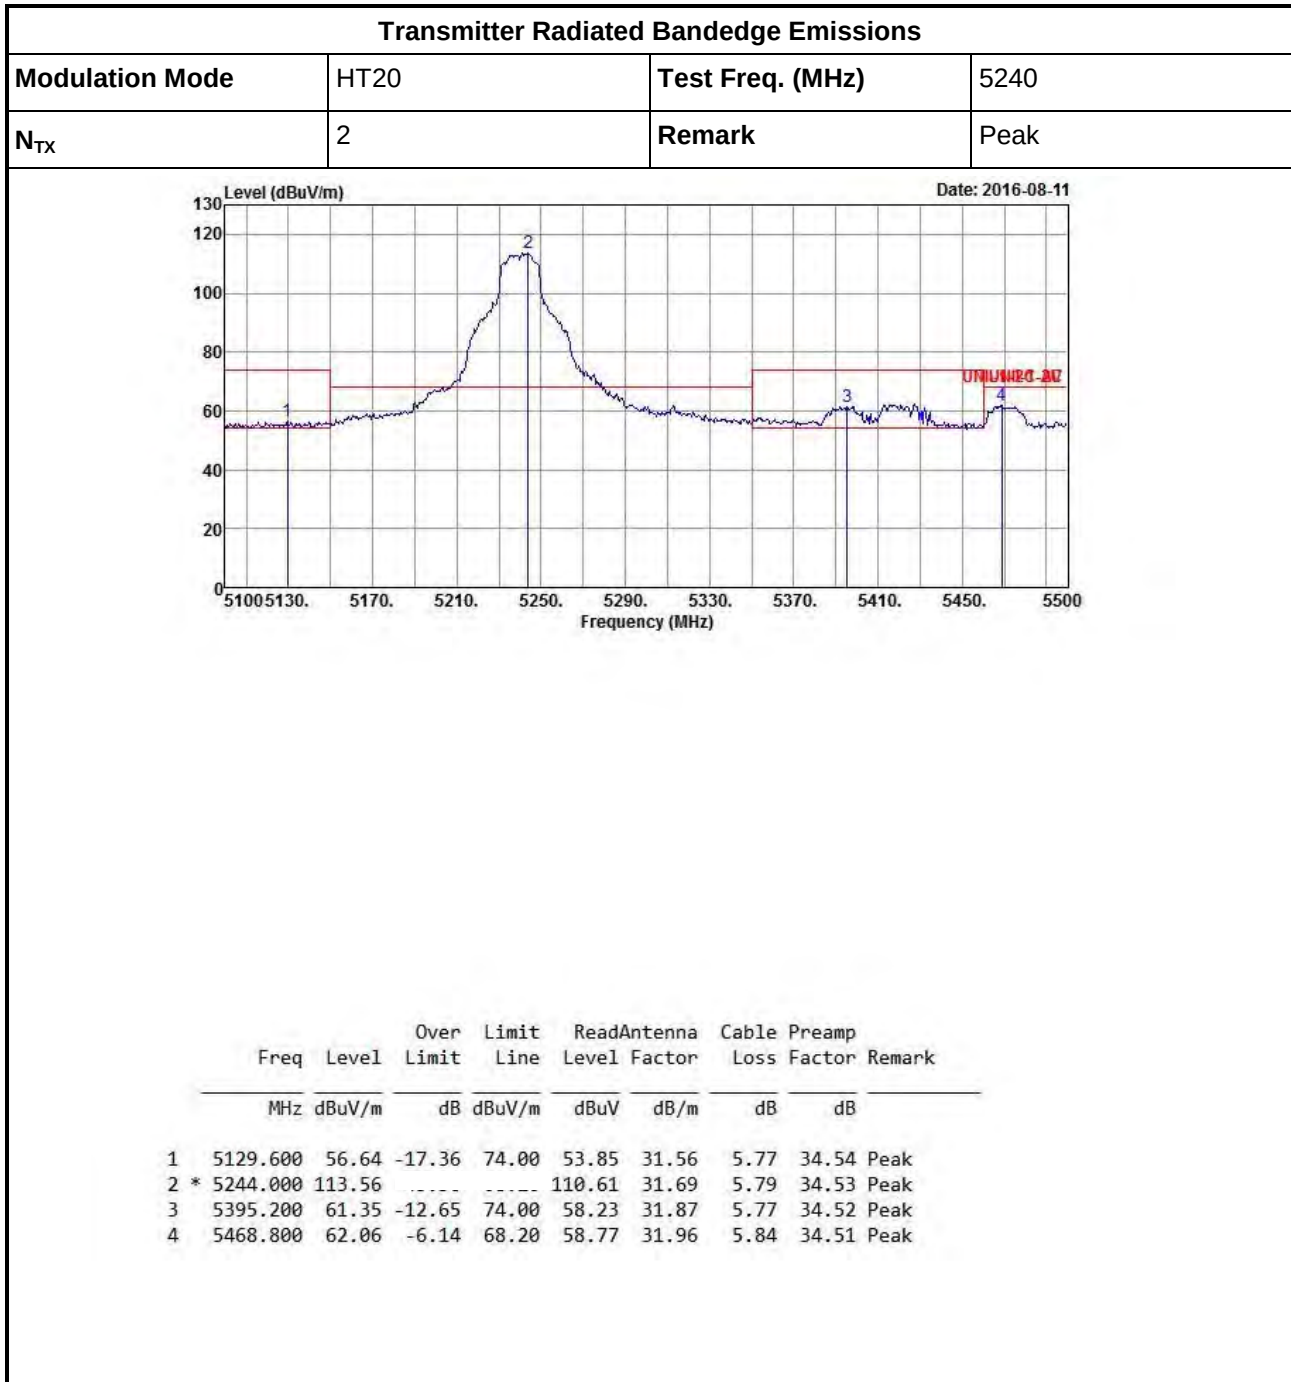


Transmitter Radiated Bandedge Emissions

Modulation Mode	HT20	Test Freq. (MHz)	5260
N _{TX}	2	Remark	Average

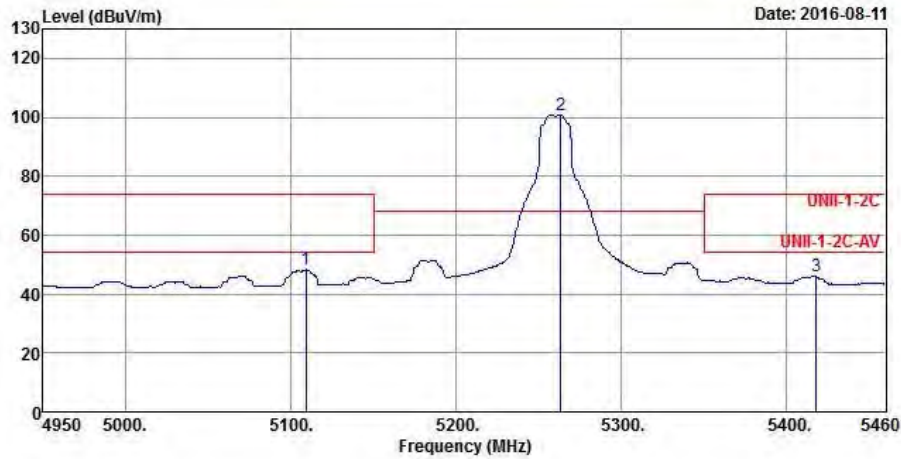


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamplifier	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	5109.120	48.24	-5.76	54.00	45.48	31.53	5.77	34.54 Average
2 *	5263.140	100.81			97.84	31.72	5.78	34.53 Average
3	5418.180	45.91	-8.09	54.00	42.74	31.90	5.79	34.52 Average

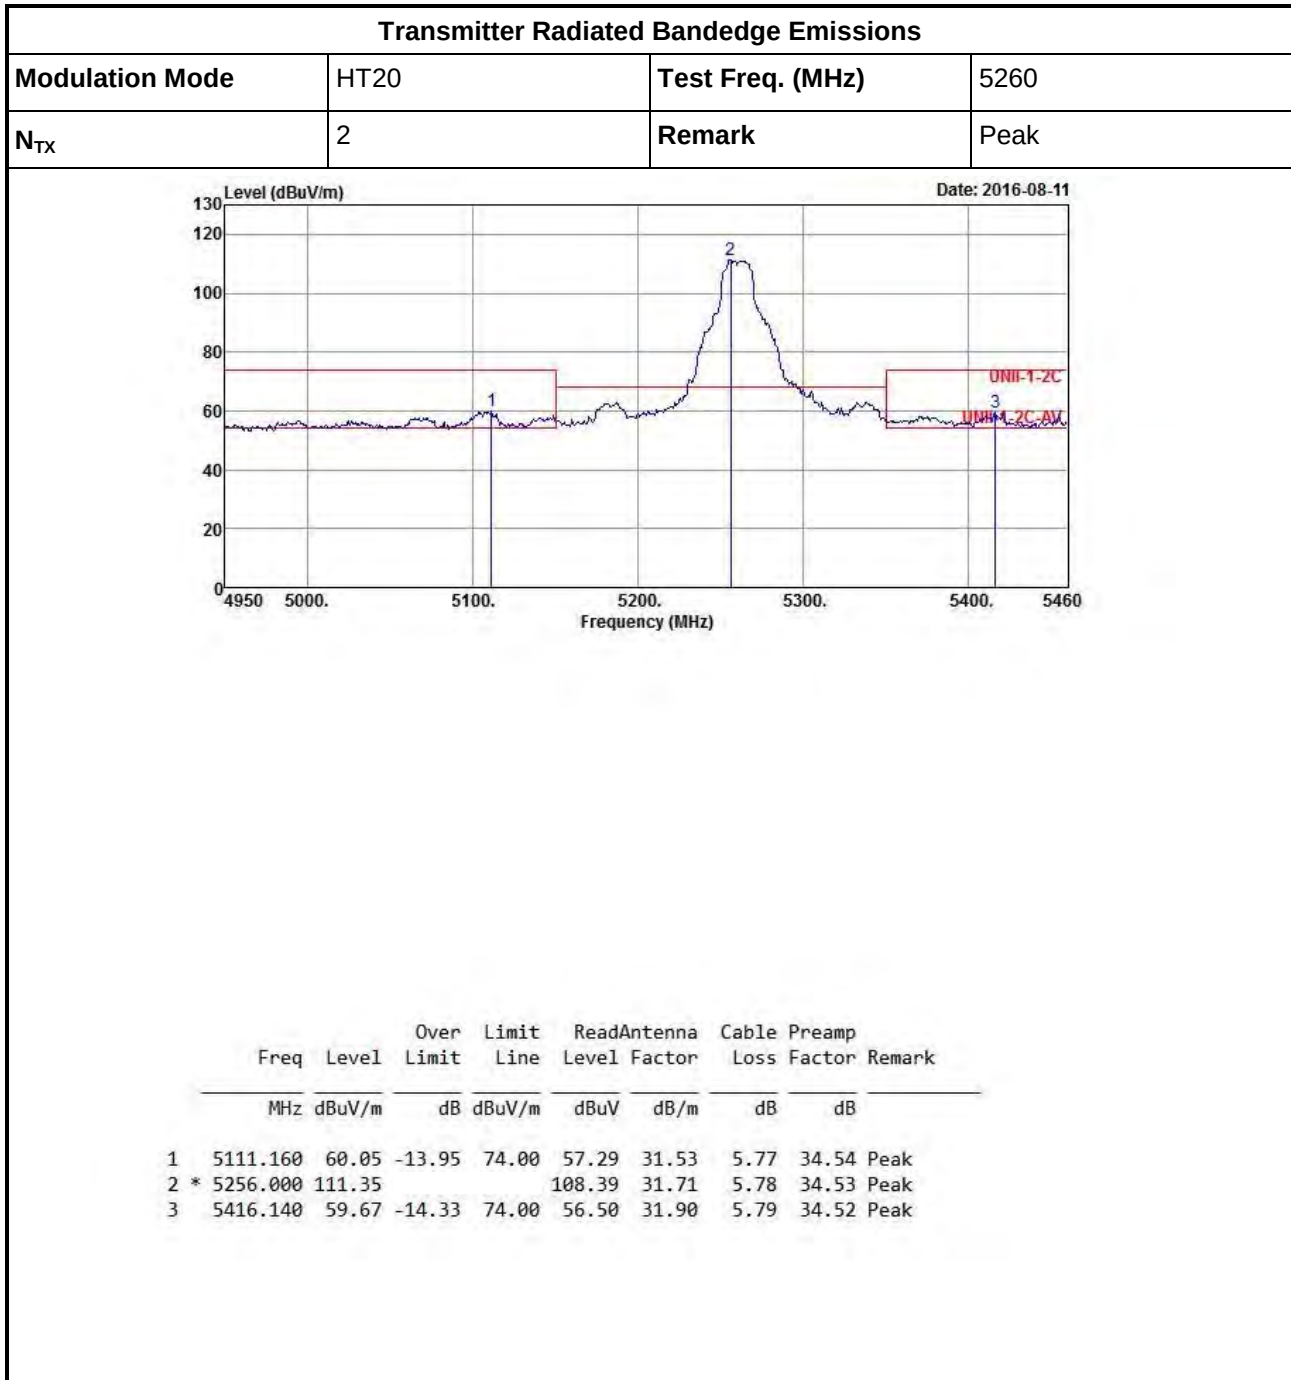



Transmitter Radiated Bandedge Emissions

Modulation Mode	HT20	Test Freq. (MHz)	5300
N _{TX}	2	Remark	Average

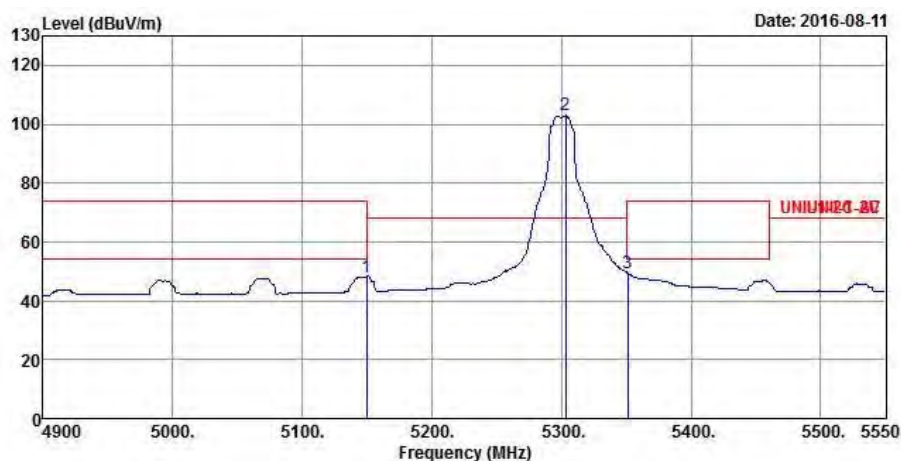


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp	Loss Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	5149.600	48.20	-5.80	54.00	45.38	31.58	5.78	34.54 Average
2 *	5303.000	102.93			99.92	31.76	5.78	34.53 Average
3	5351.100	49.36	-4.64	54.00	46.29	31.82	5.77	34.52 Average

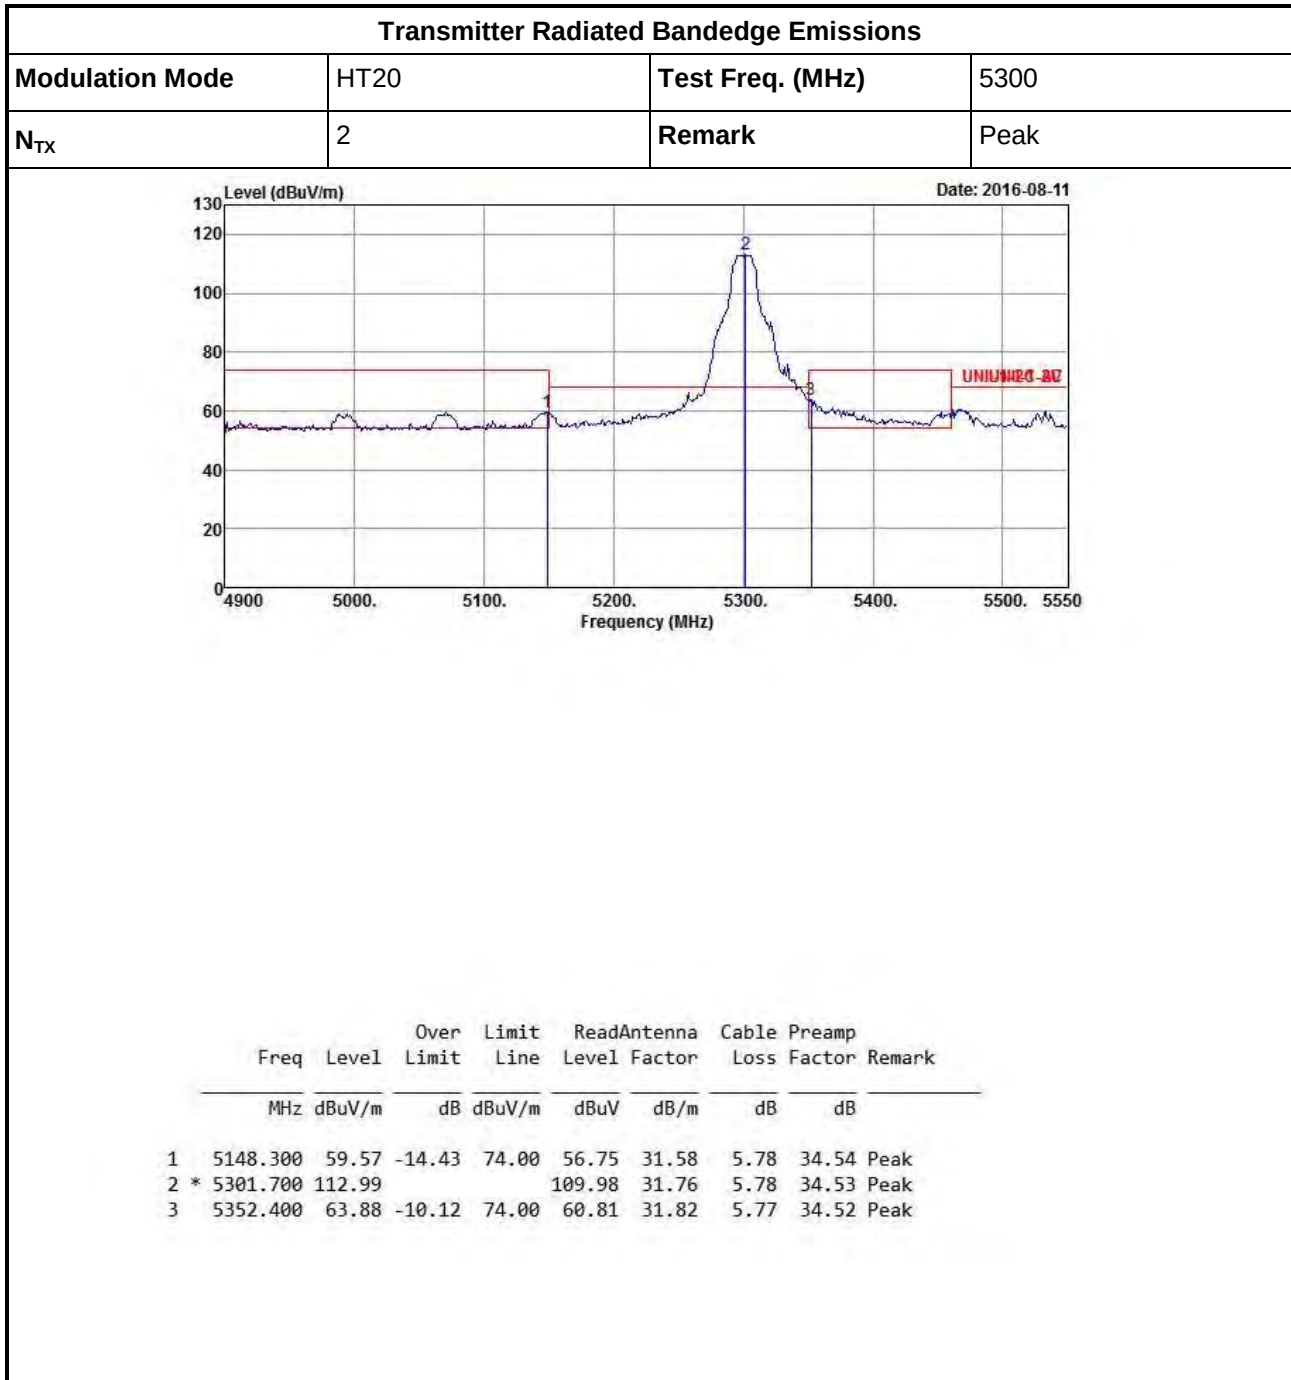

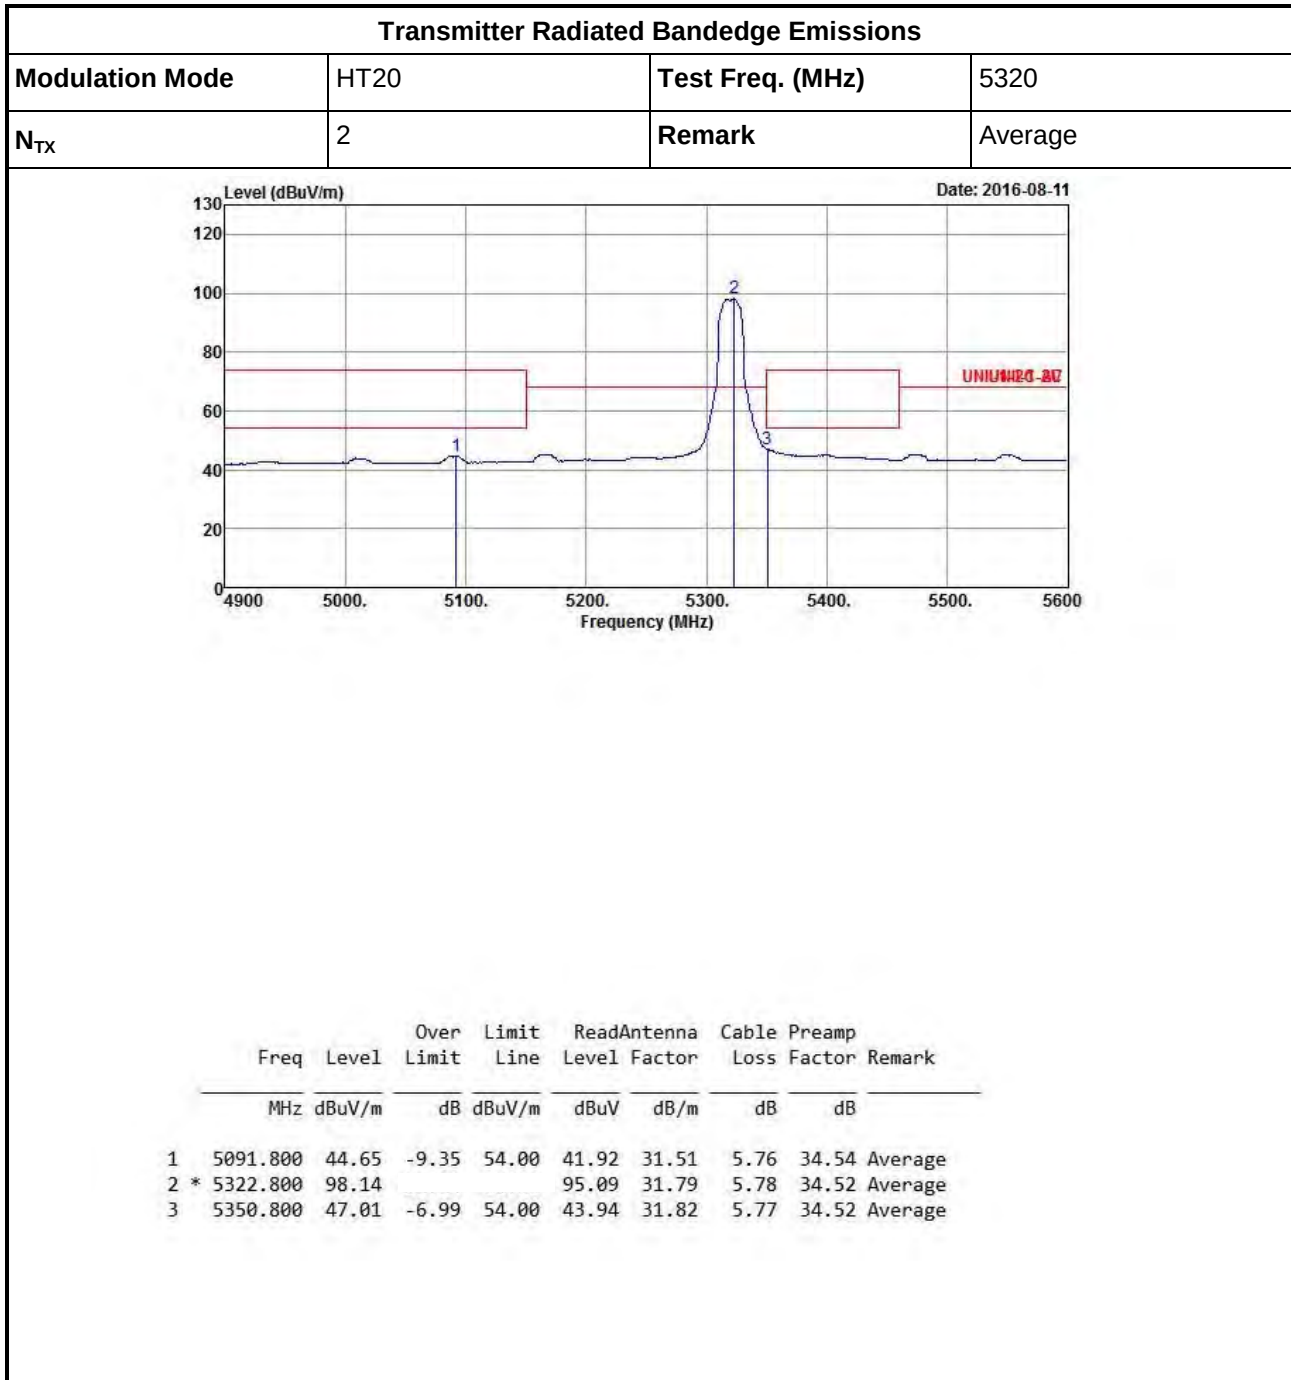



Transmitter Radiated Bandedge Emissions


Modulation Mode	HT20	Test Freq. (MHz)	5320
N _{TX}	2	Remark	Peak

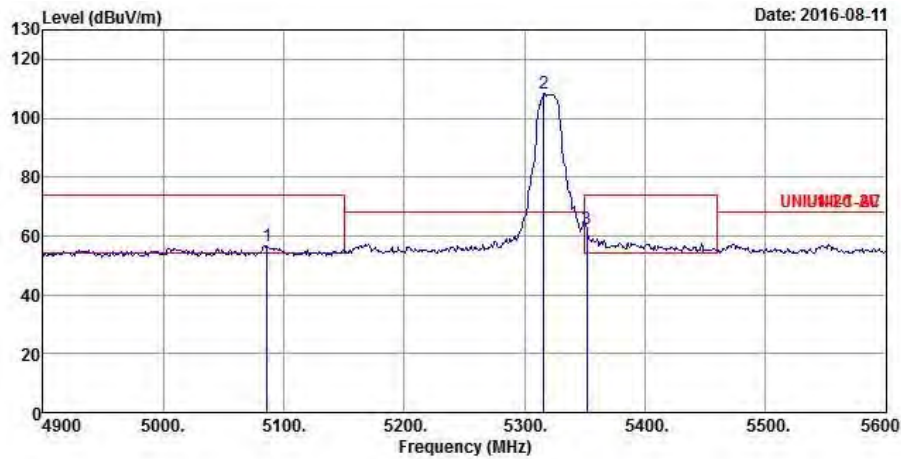



	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB	dB	
1	5086.200	56.62	-17.38	74.00	53.90	31.50	5.76	34.54 Peak
2 *	5315.800	108.37	-----	-----	105.33	31.78	5.78	34.52 Peak
3	5351.500	62.27	-11.73	74.00	59.20	31.82	5.77	34.52 Peak

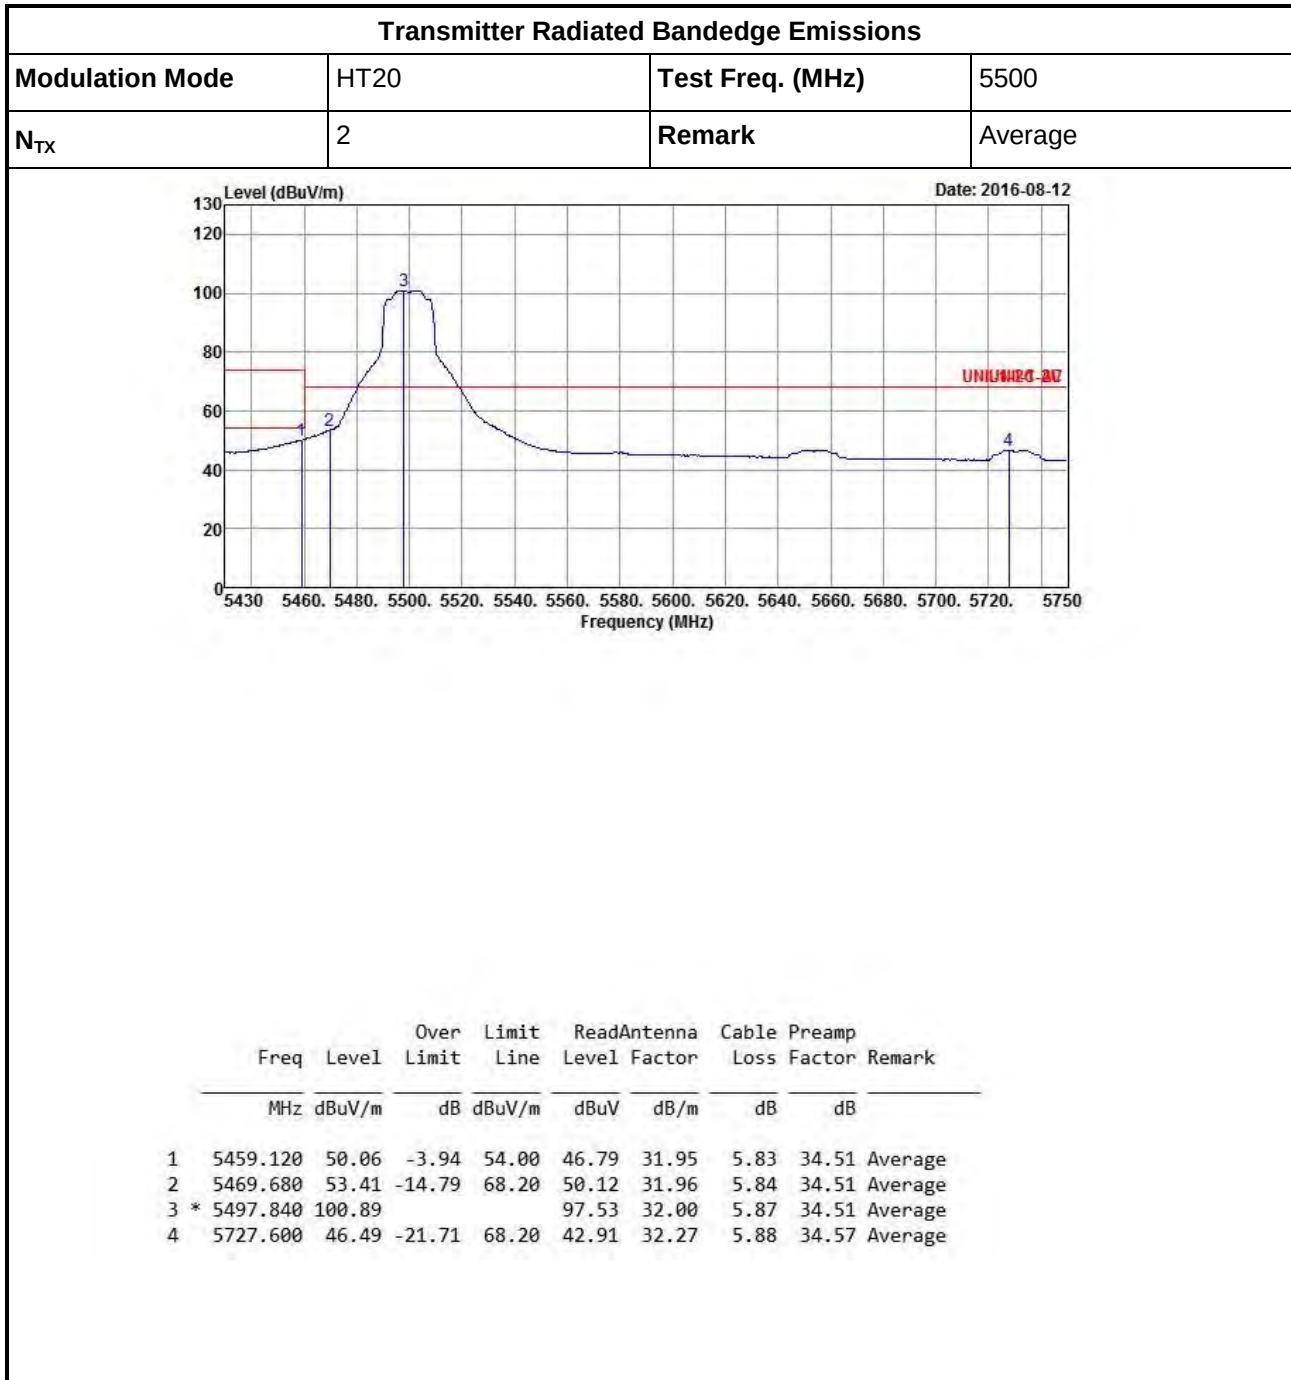


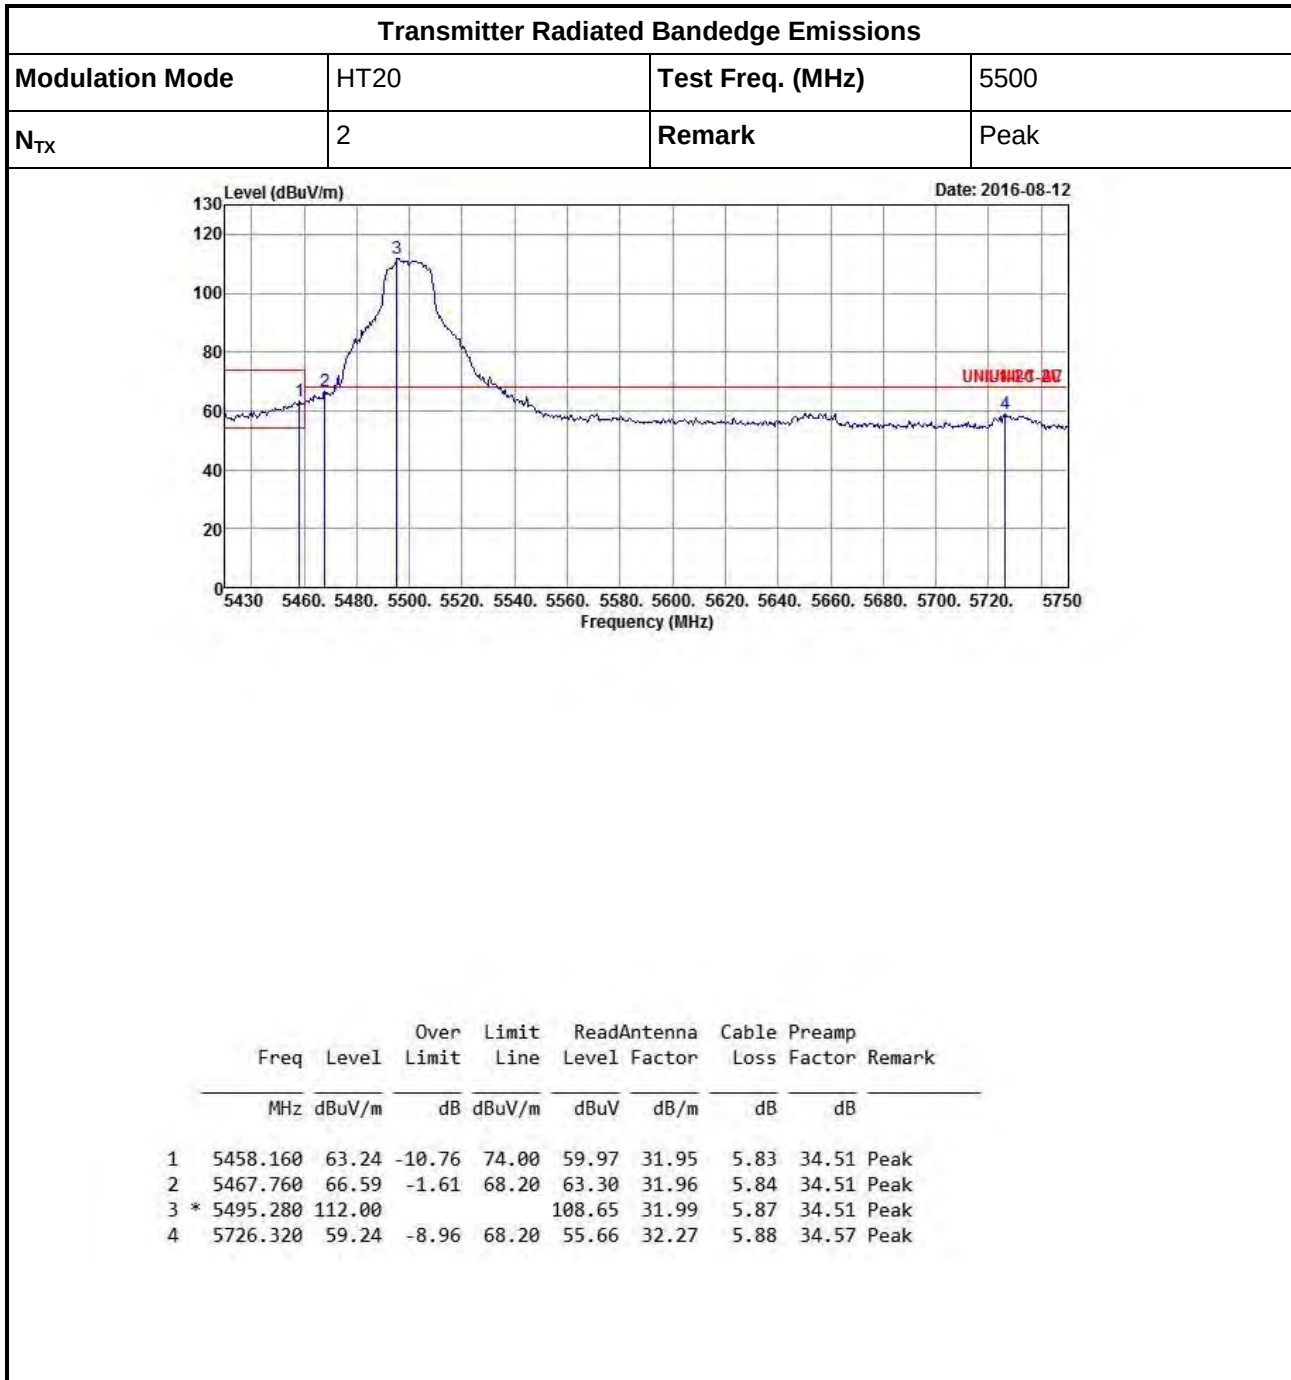


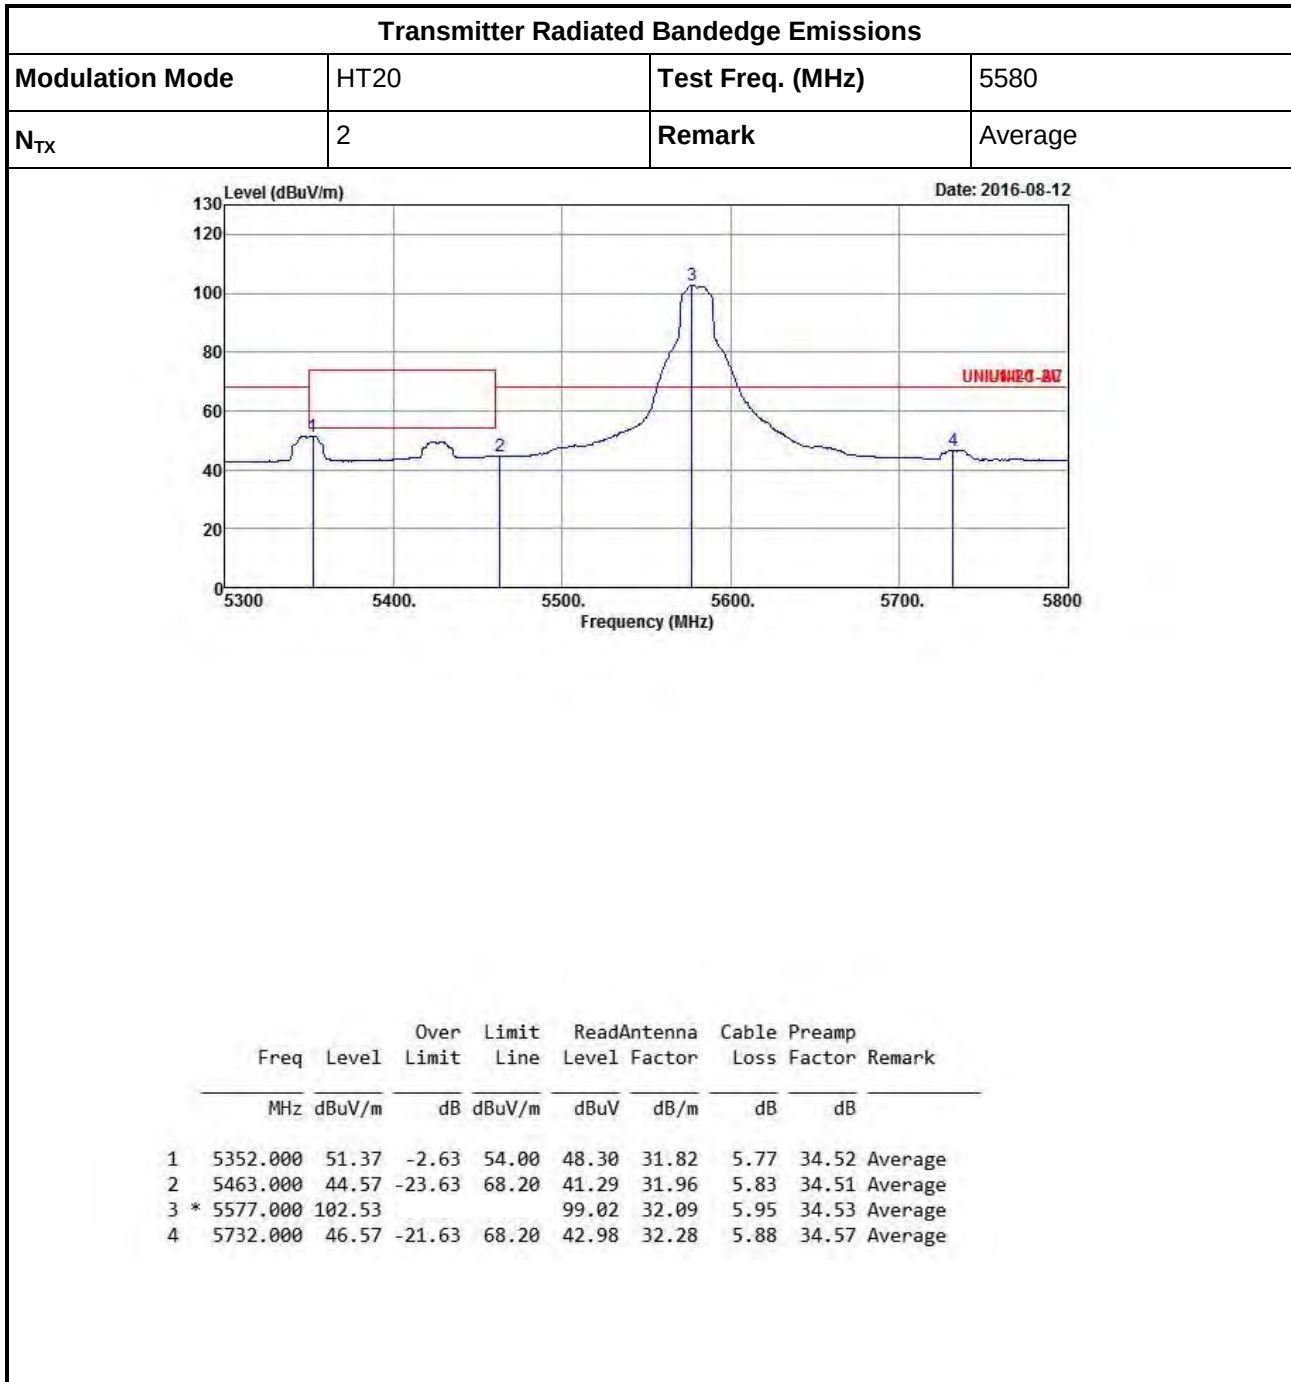


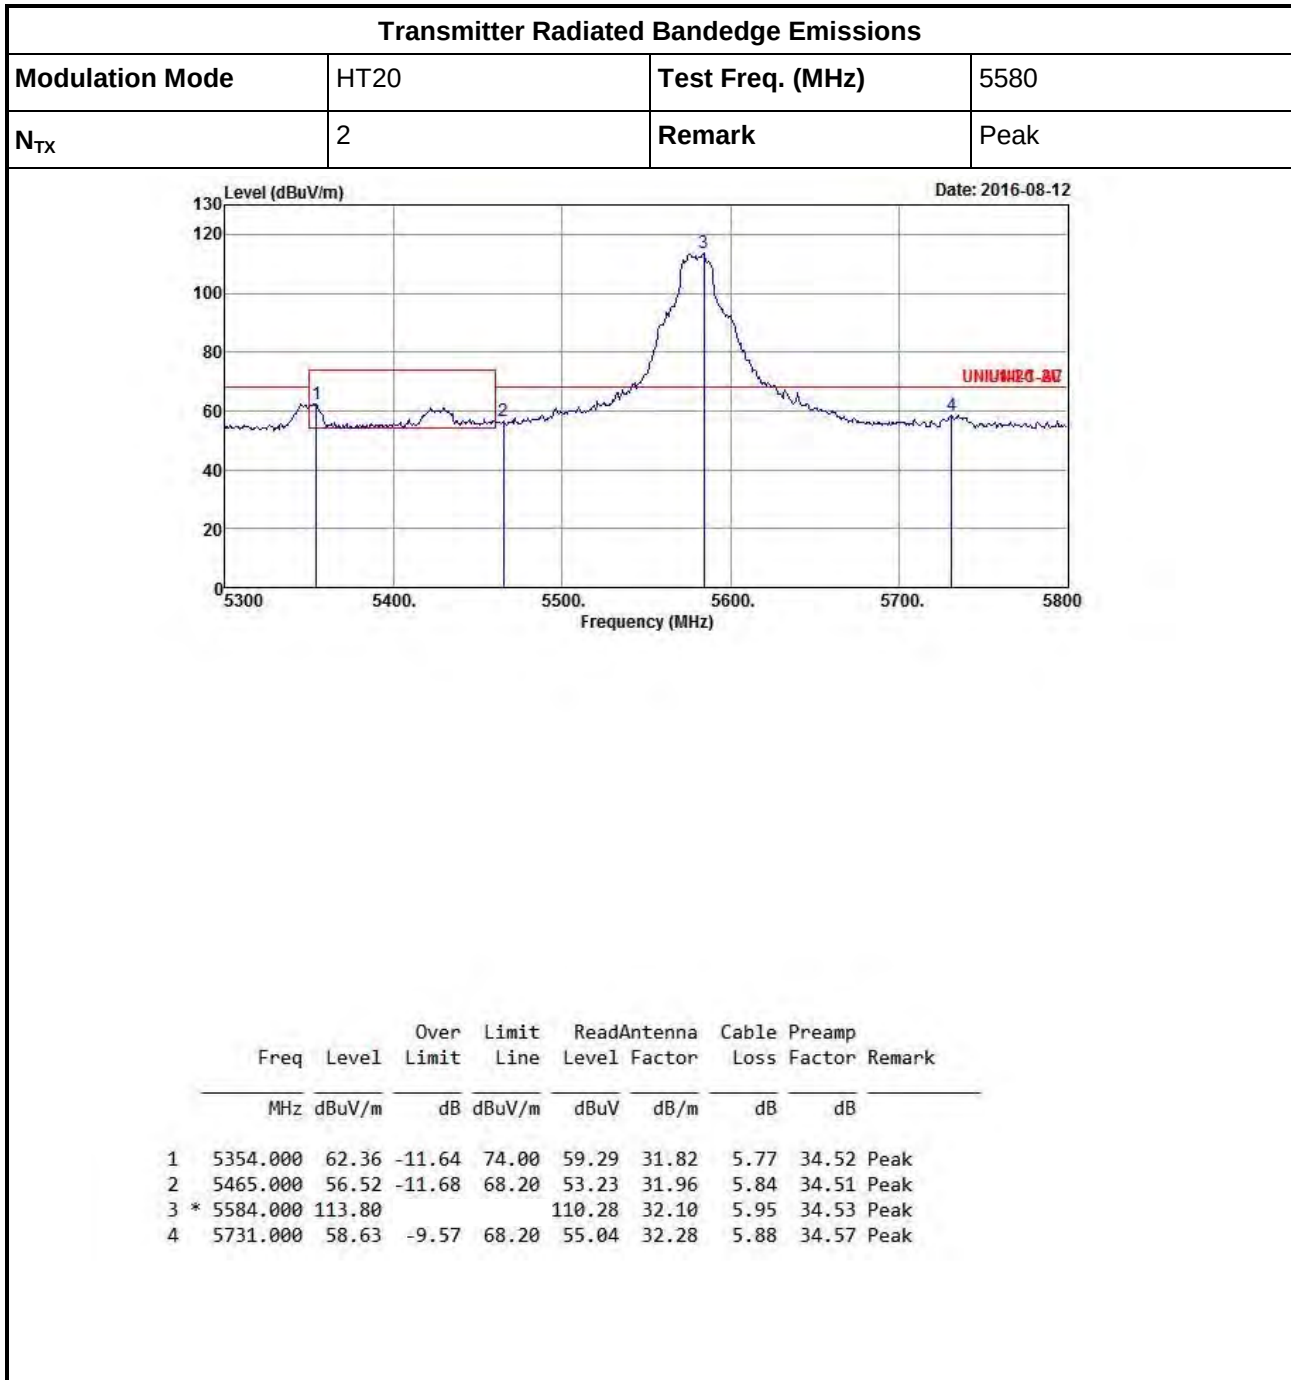


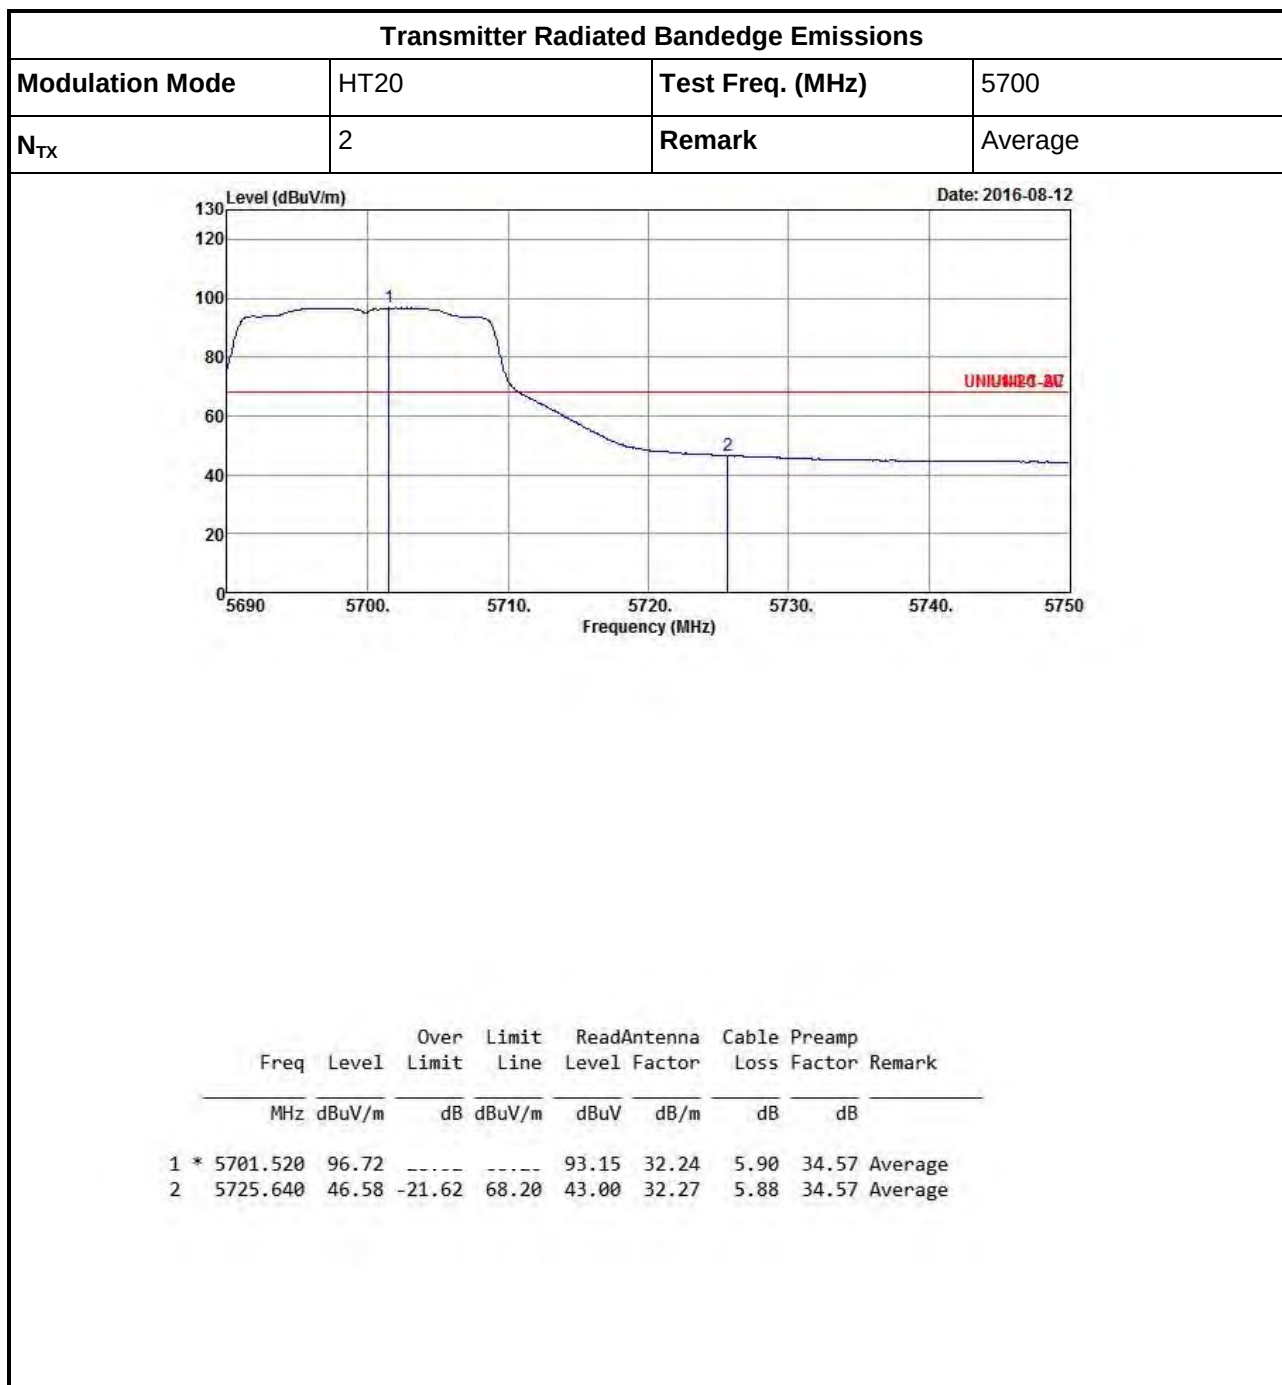


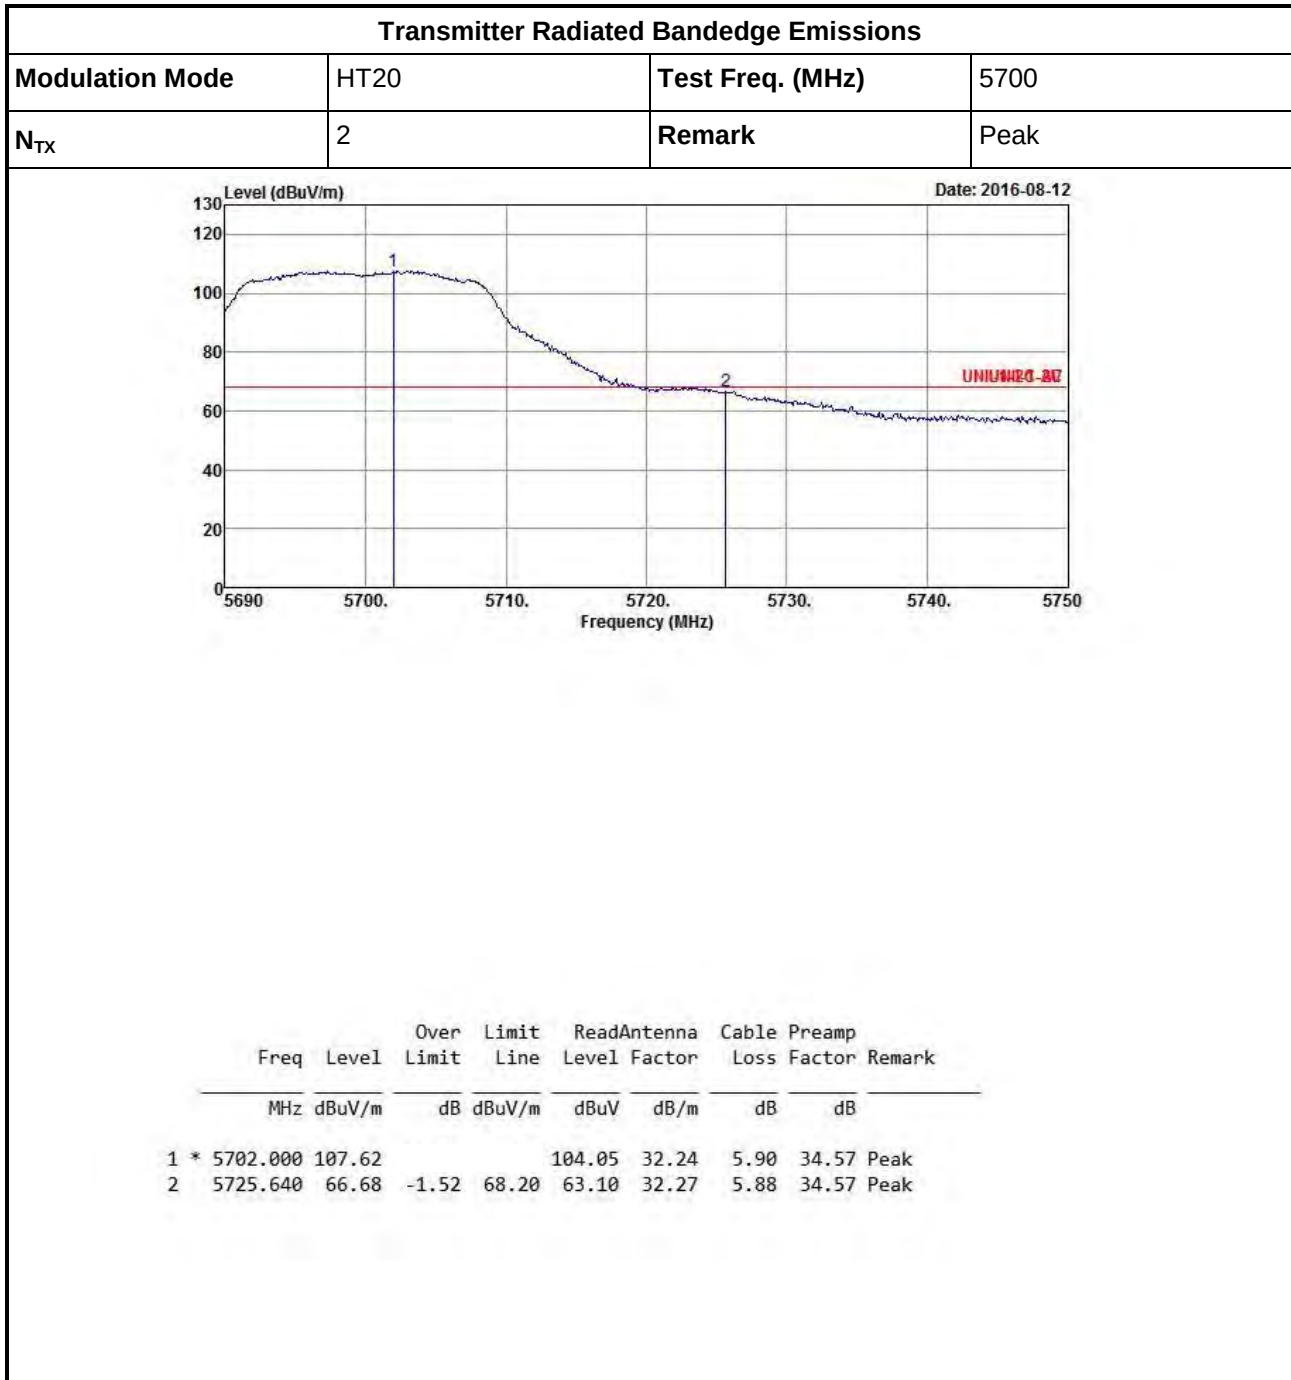

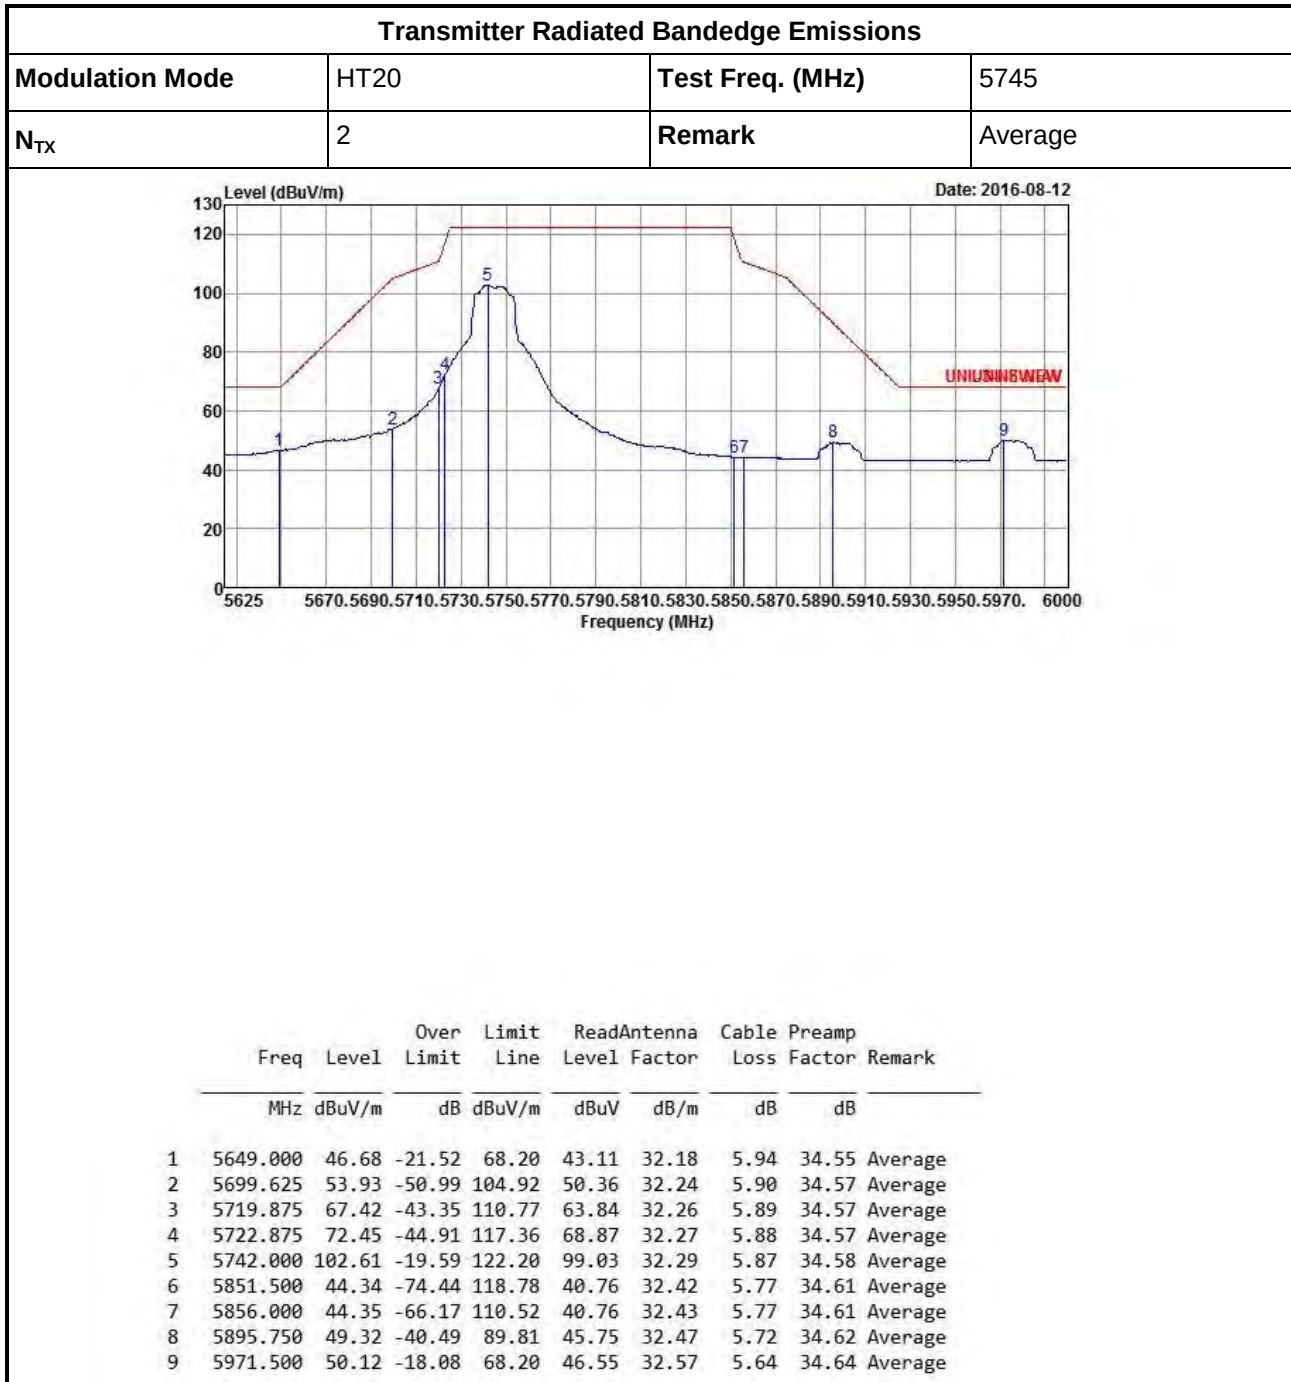

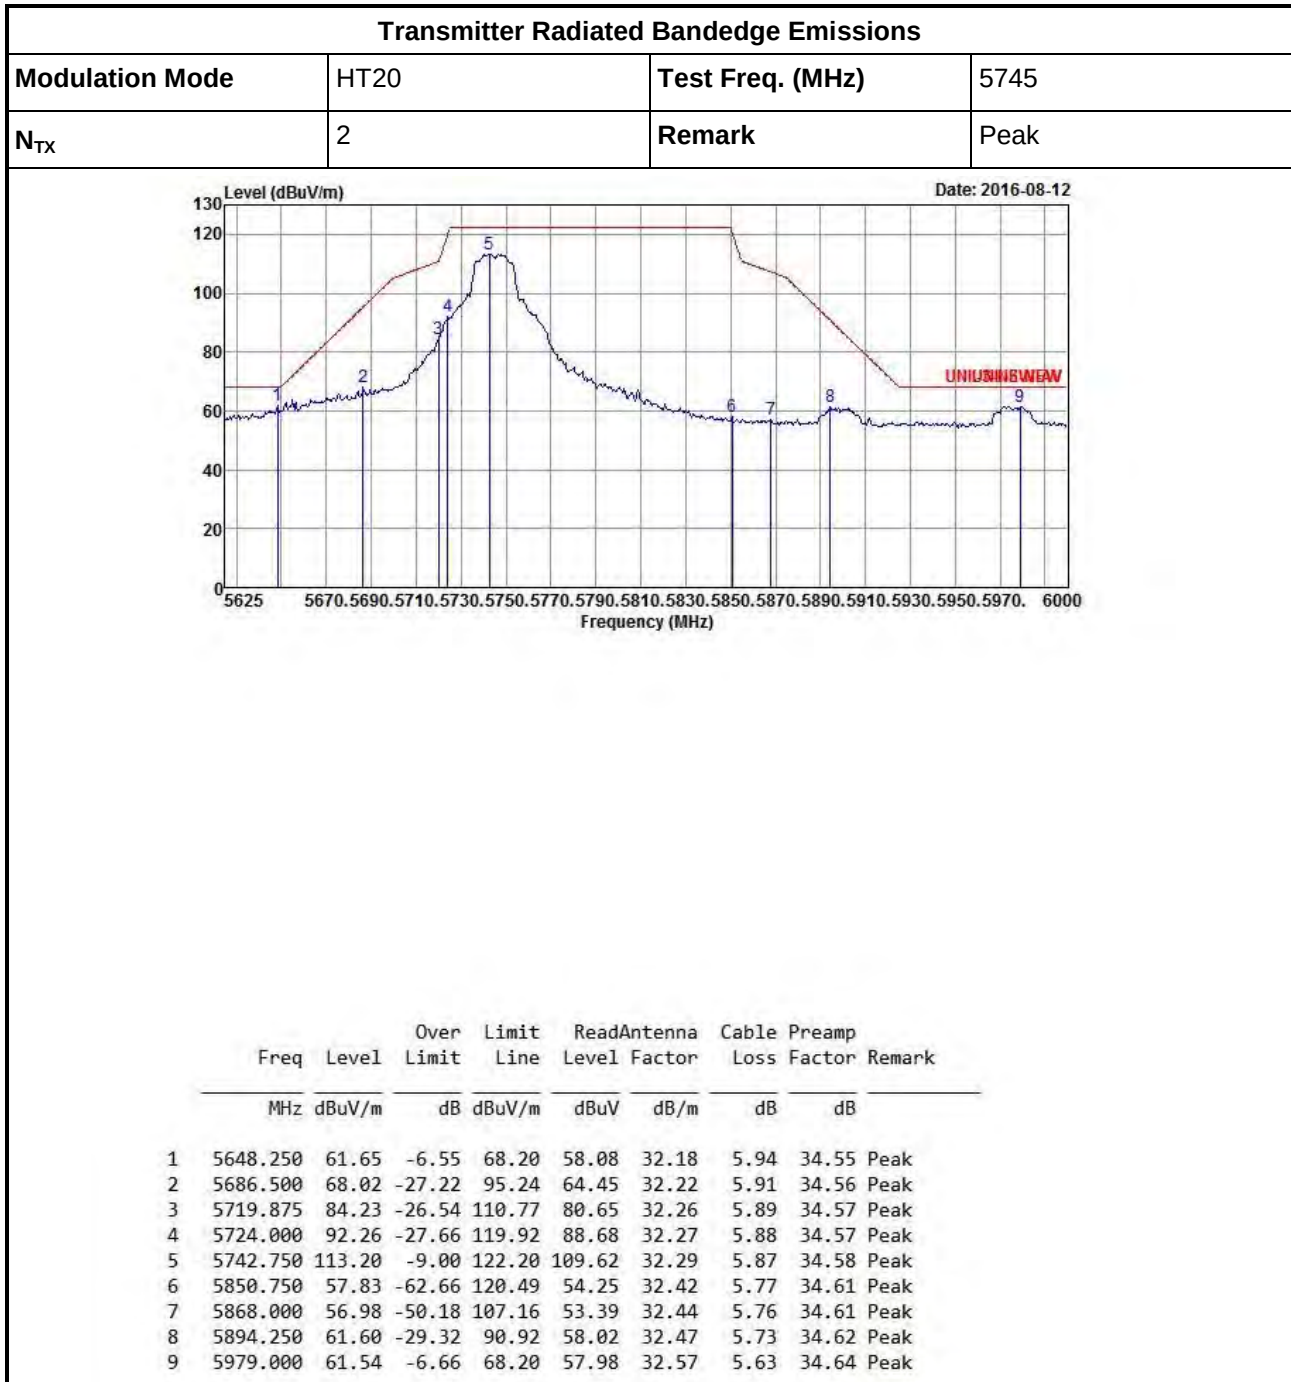


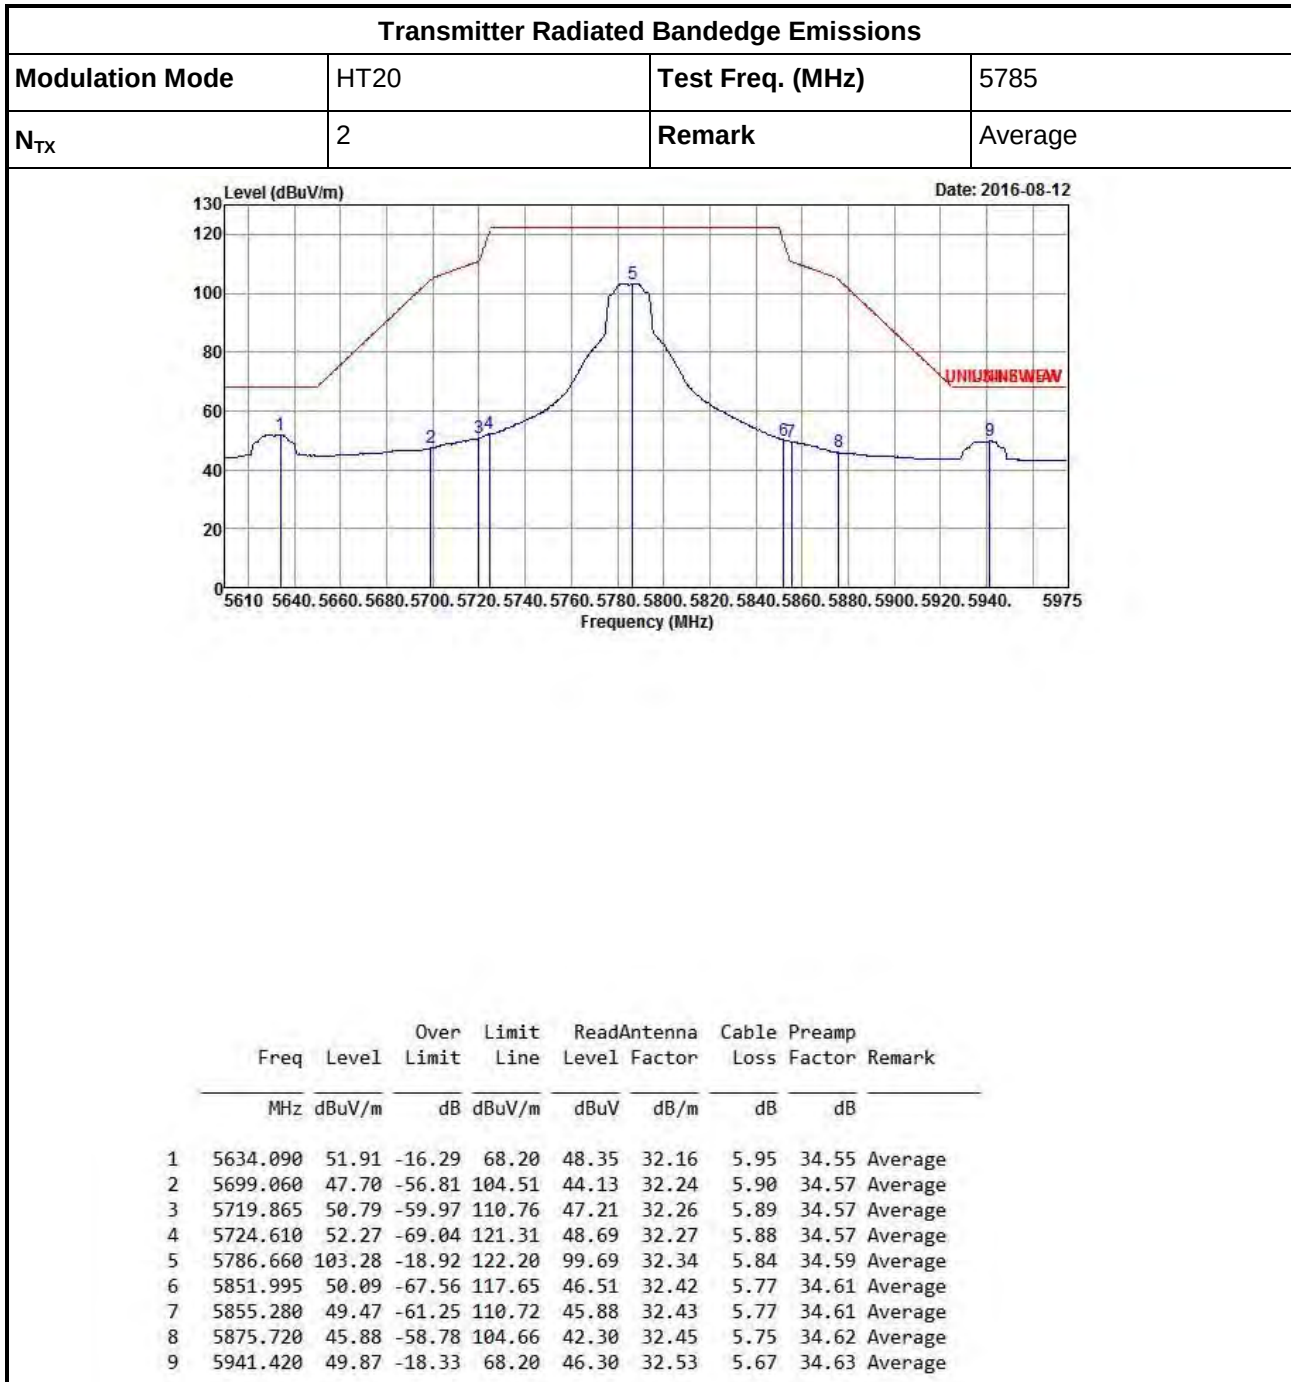

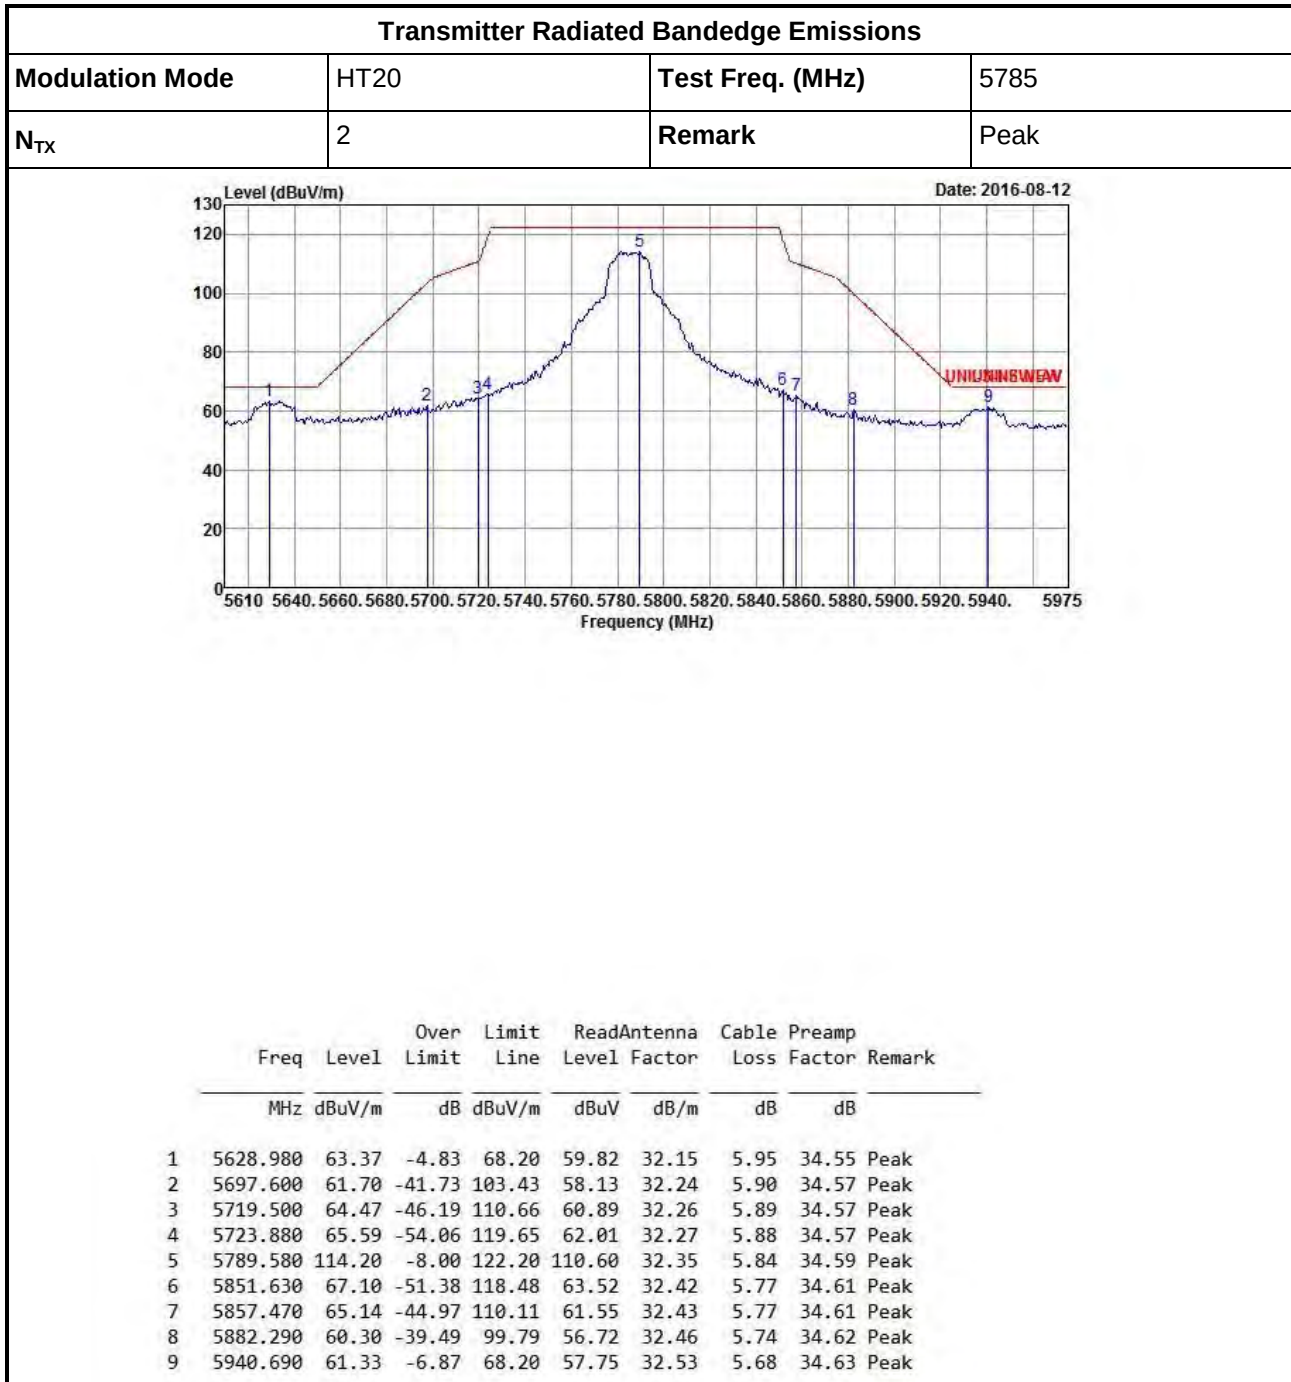



Transmitter Radiated Bandedge Emissions


Modulation Mode	HT20	Test Freq. (MHz)	5825
N _{TX}	2	Remark	Average

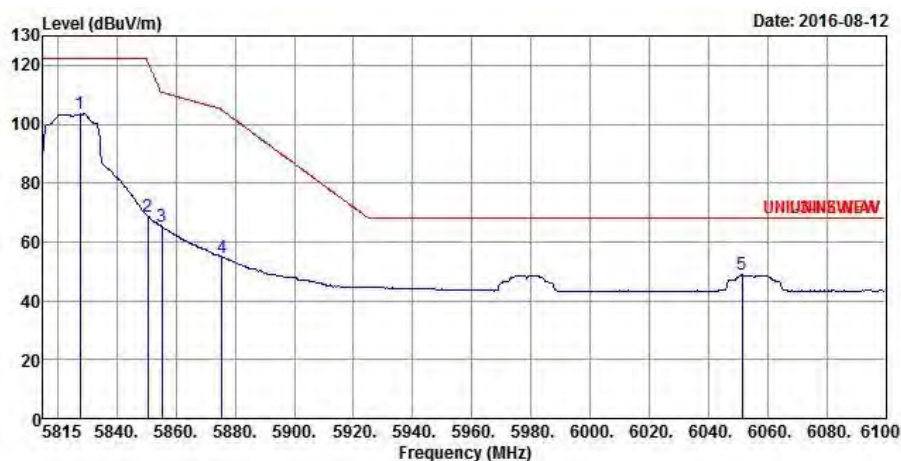



	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor
			dB	dBuV/m	dBuV	dB/m	dB	dB
1	5827.540	103.47	-18.73	122.20	99.88	32.39	5.80	34.60
2	5850.340	68.68	-52.74	121.42	65.10	32.42	5.77	34.61
3	5855.185	65.07	-45.68	110.75	61.48	32.43	5.77	34.61
4	5875.420	54.81	-50.08	104.89	51.23	32.45	5.75	34.62
5	6051.550	48.74	-19.46	68.20	44.99	32.74	5.66	34.65

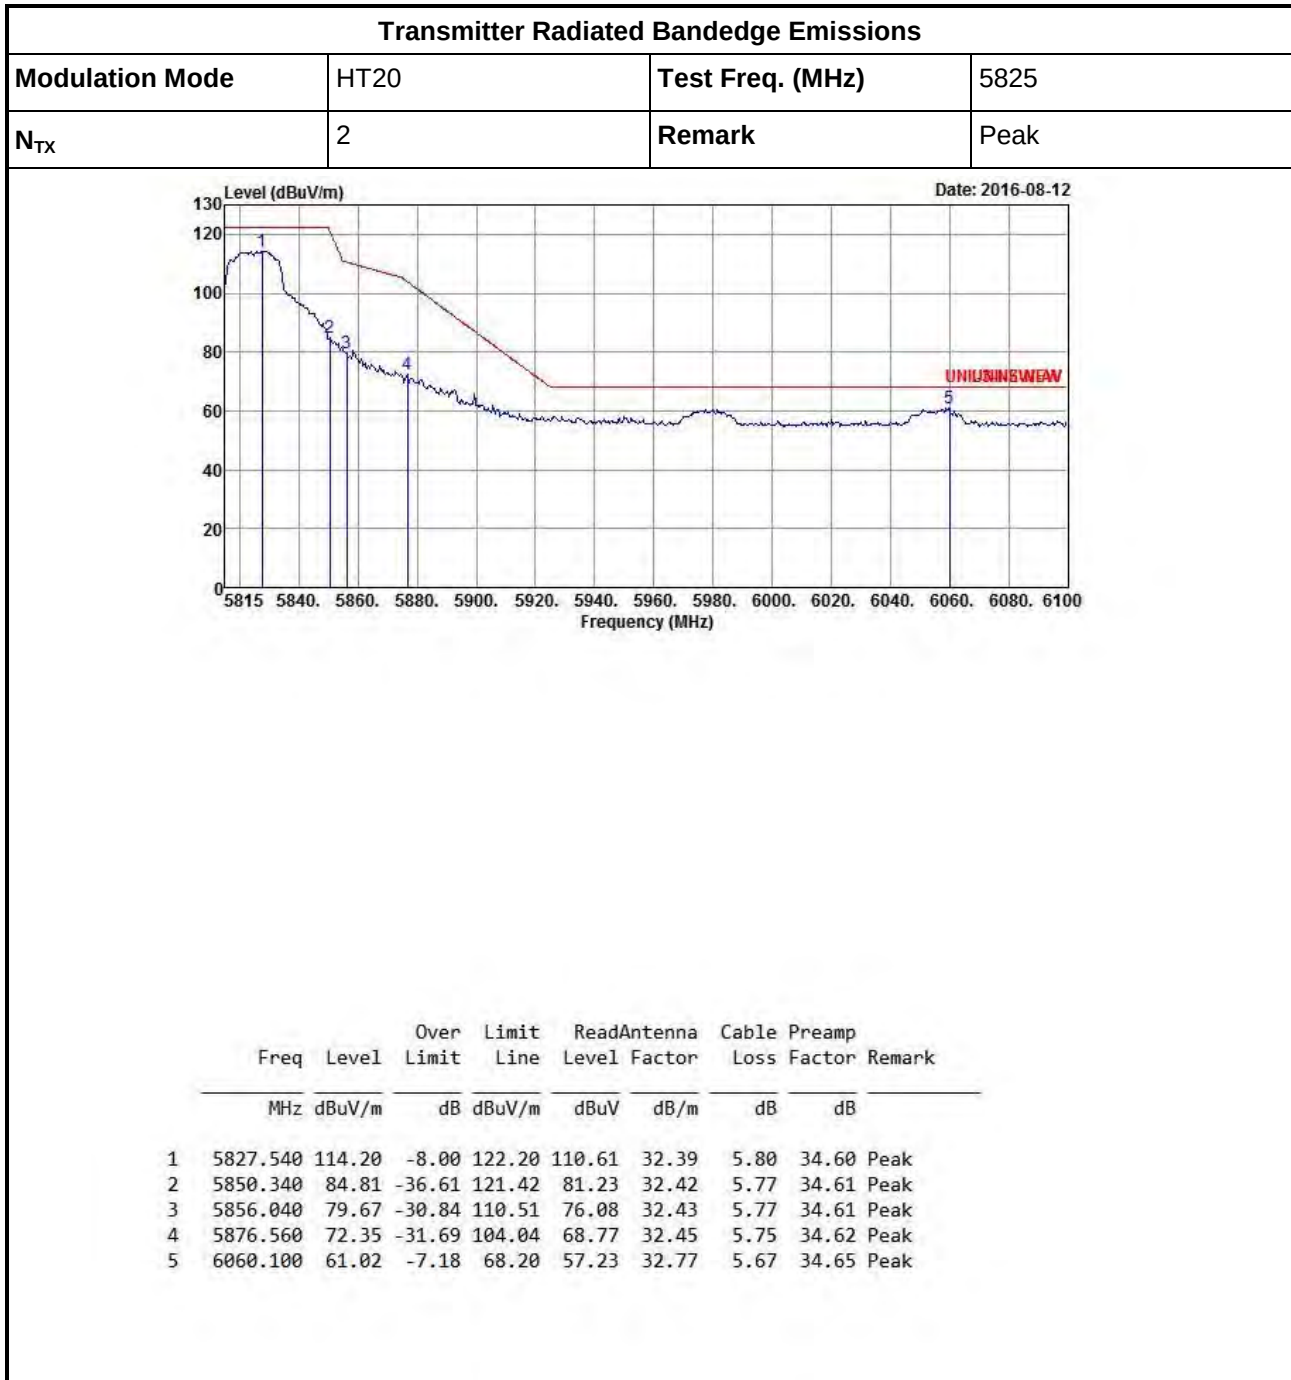


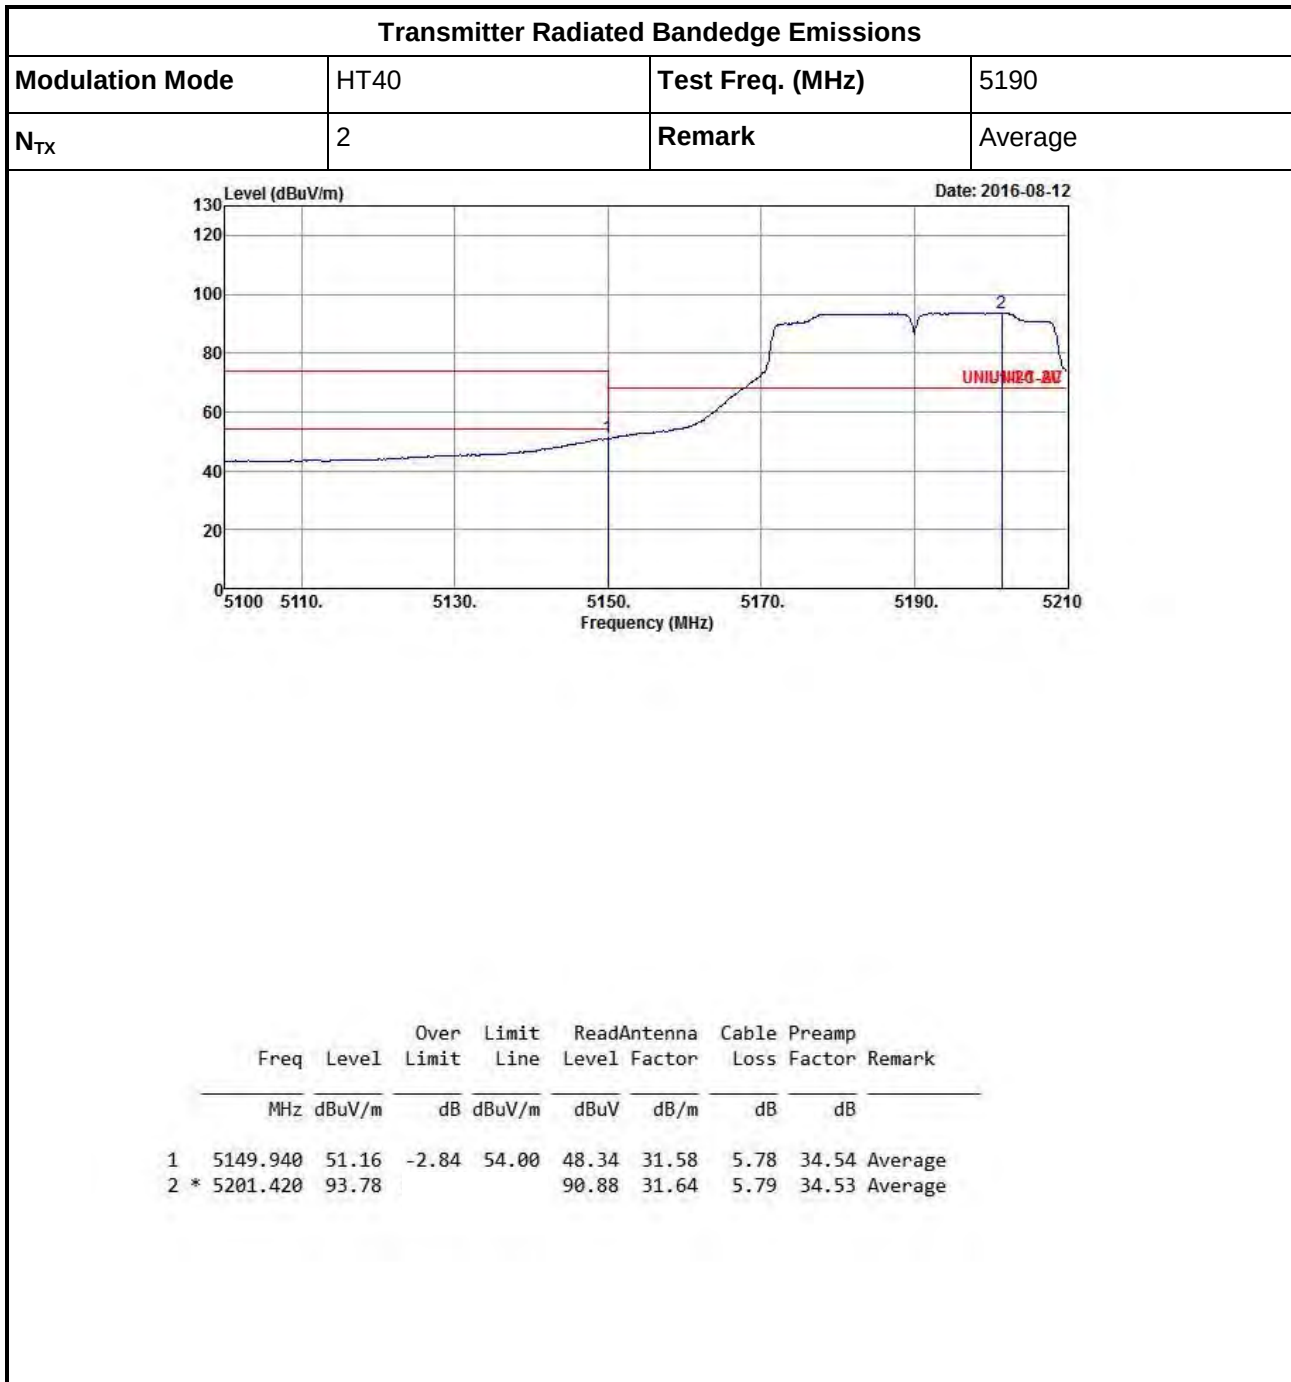


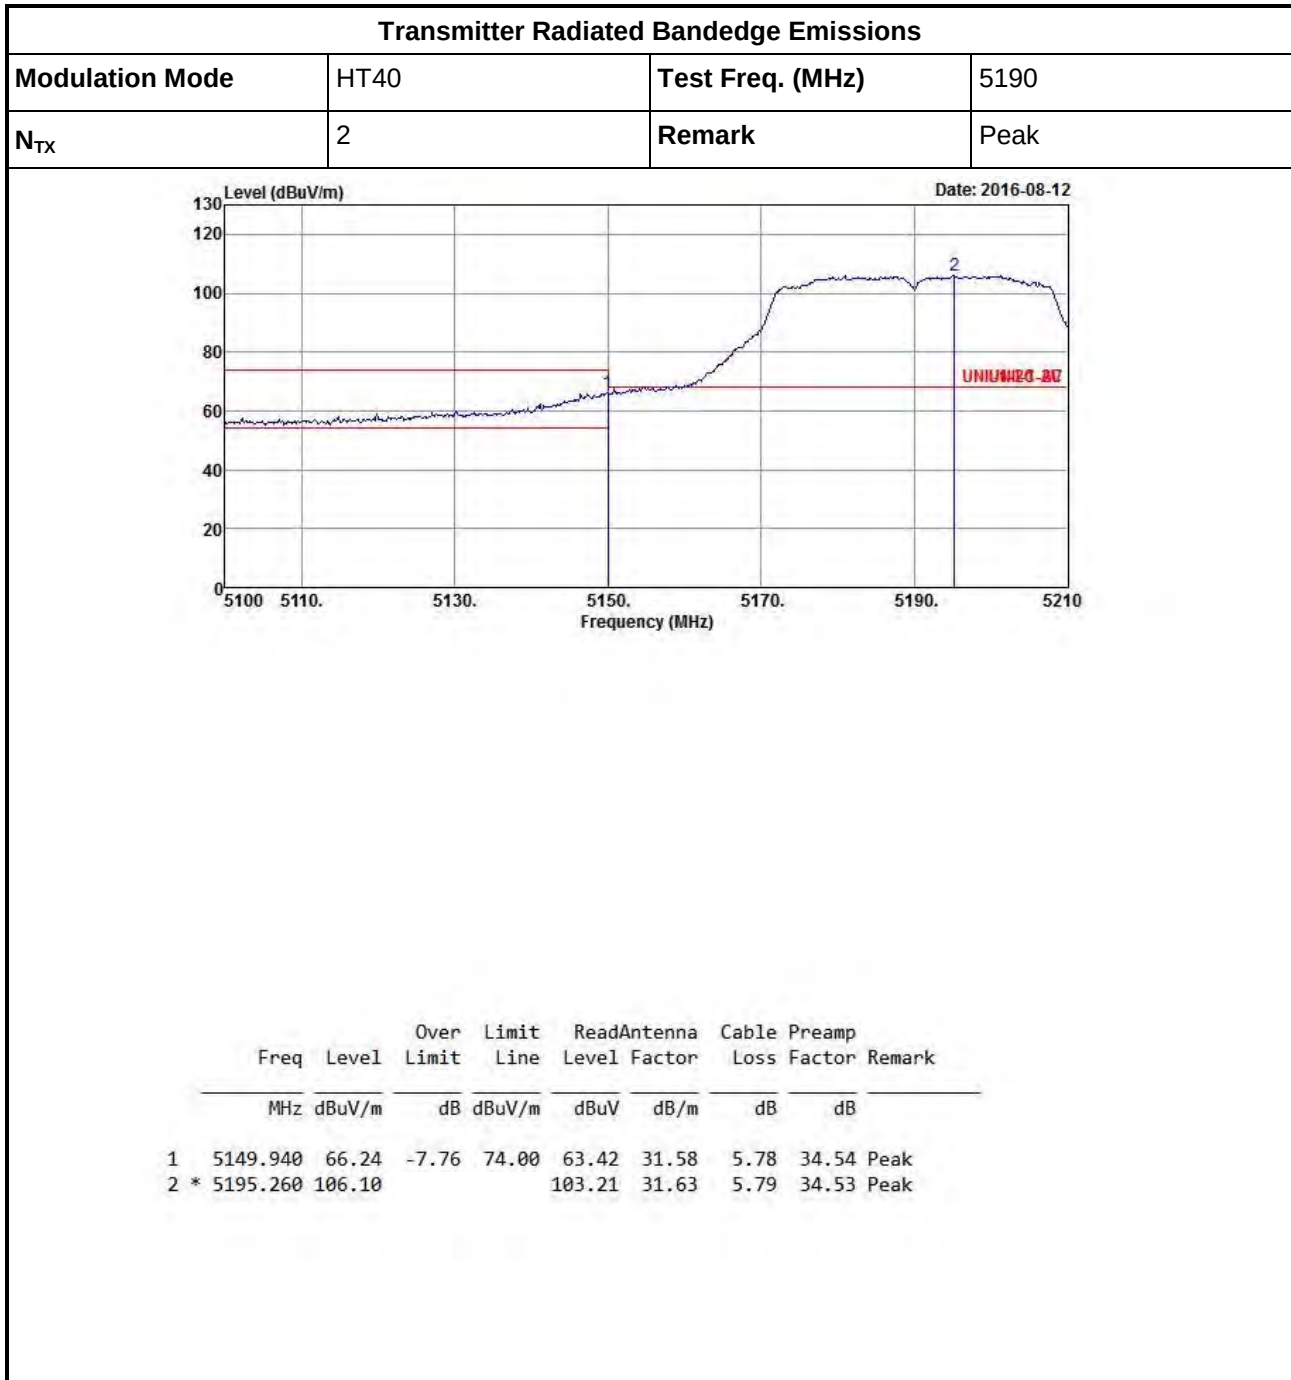

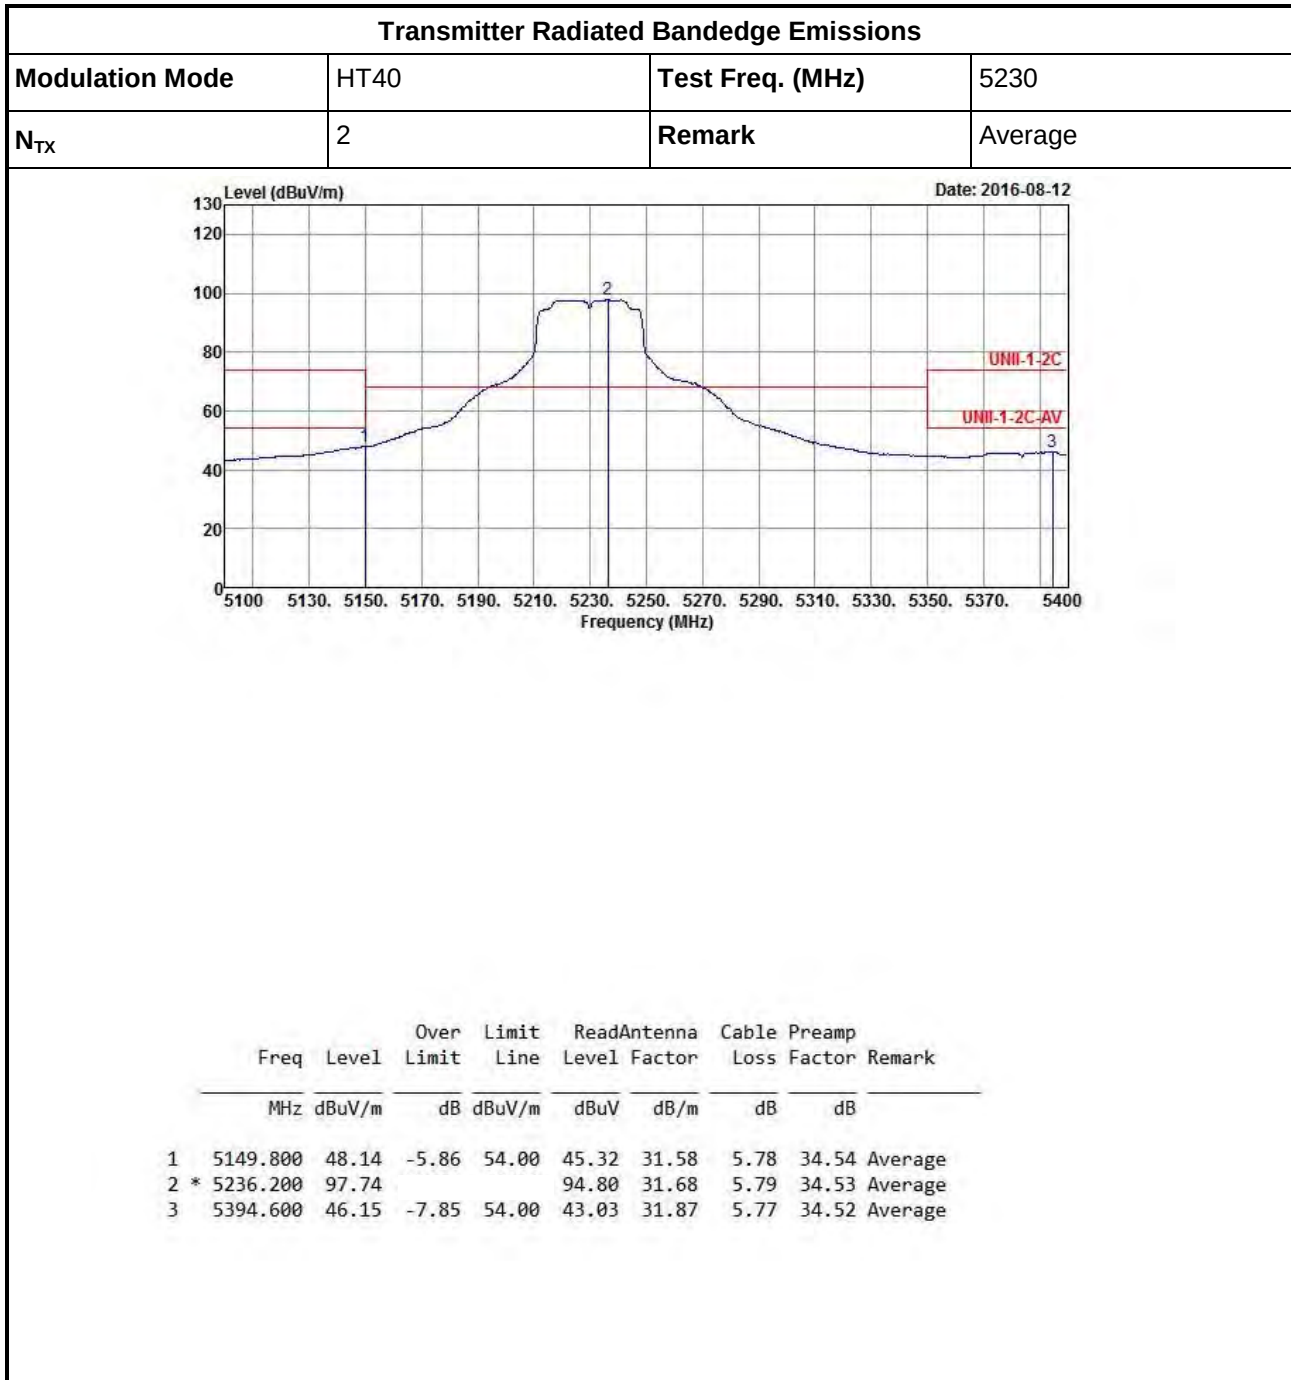

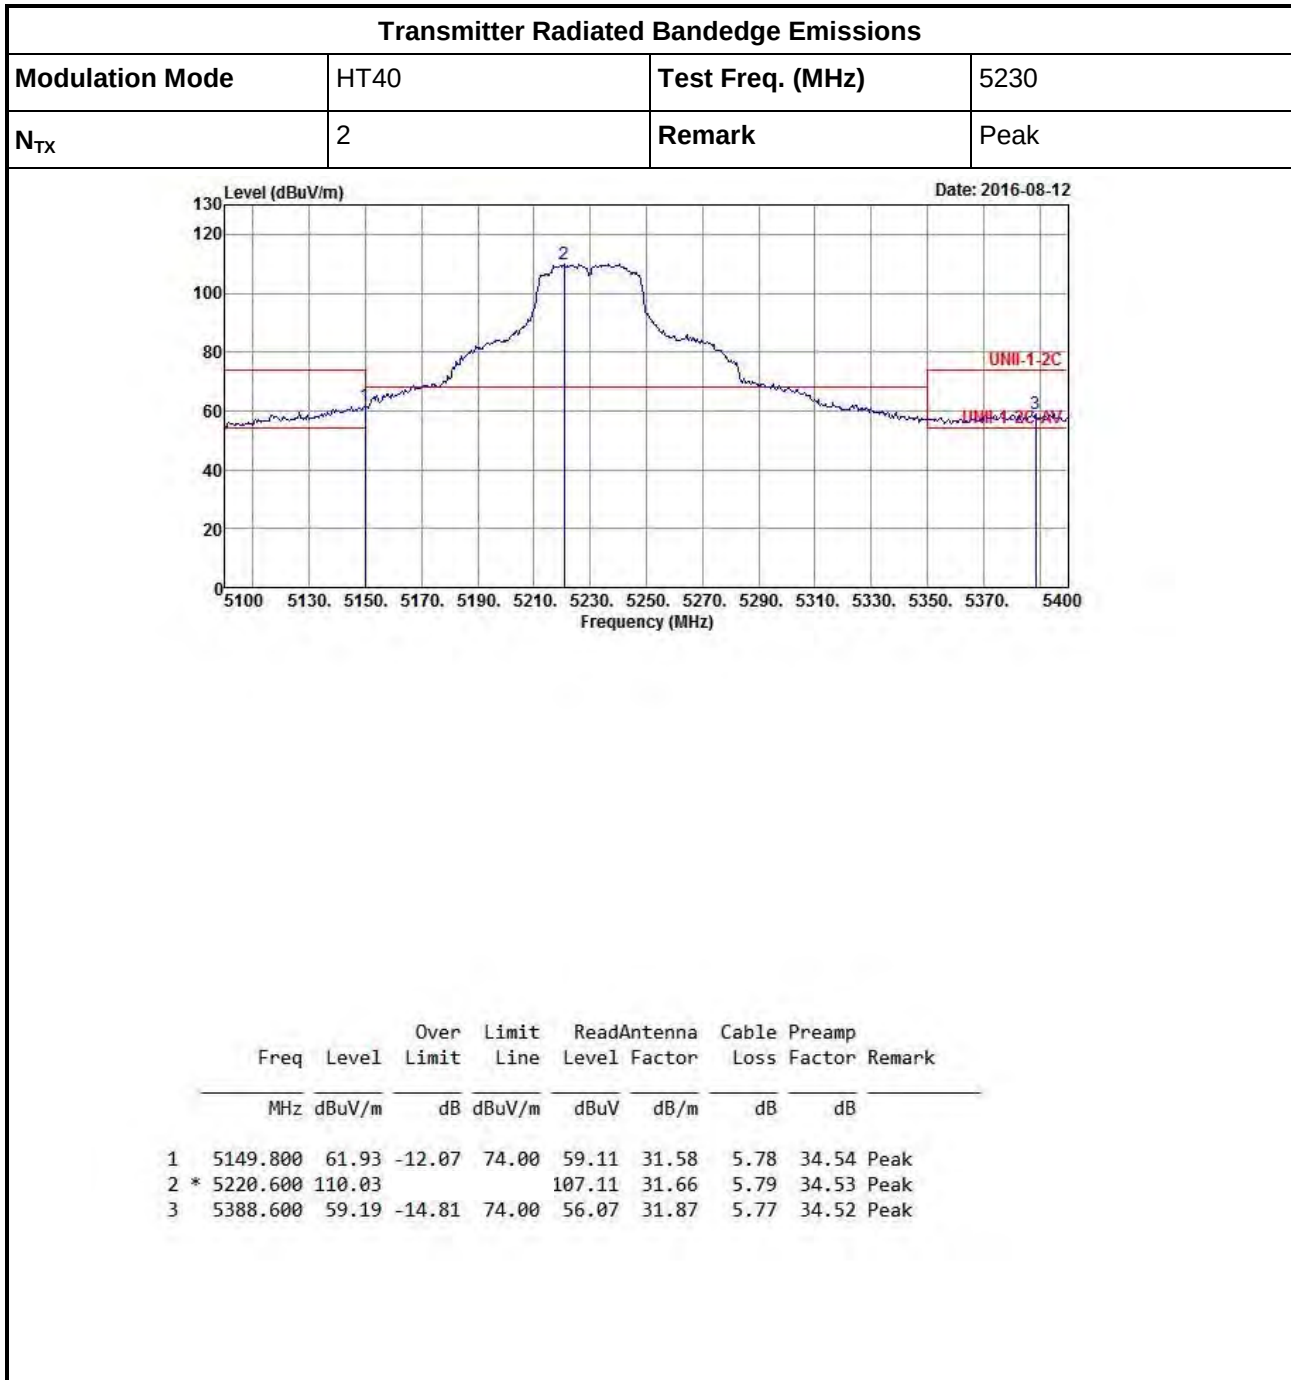


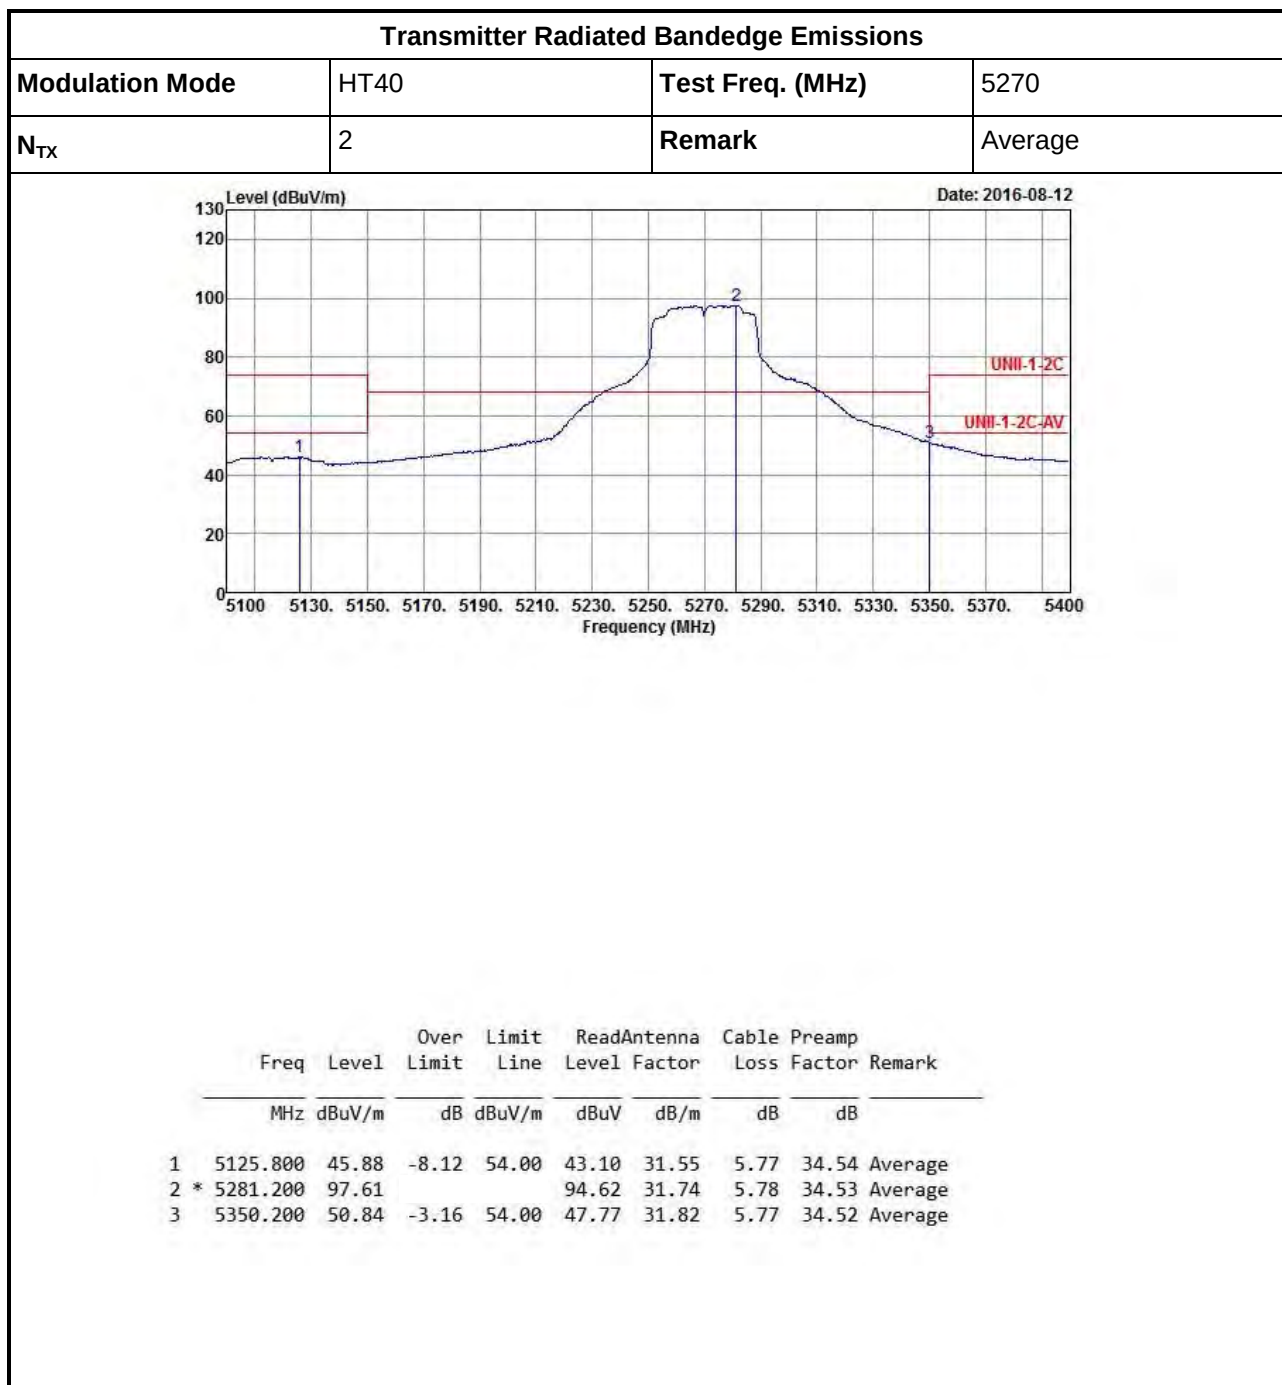

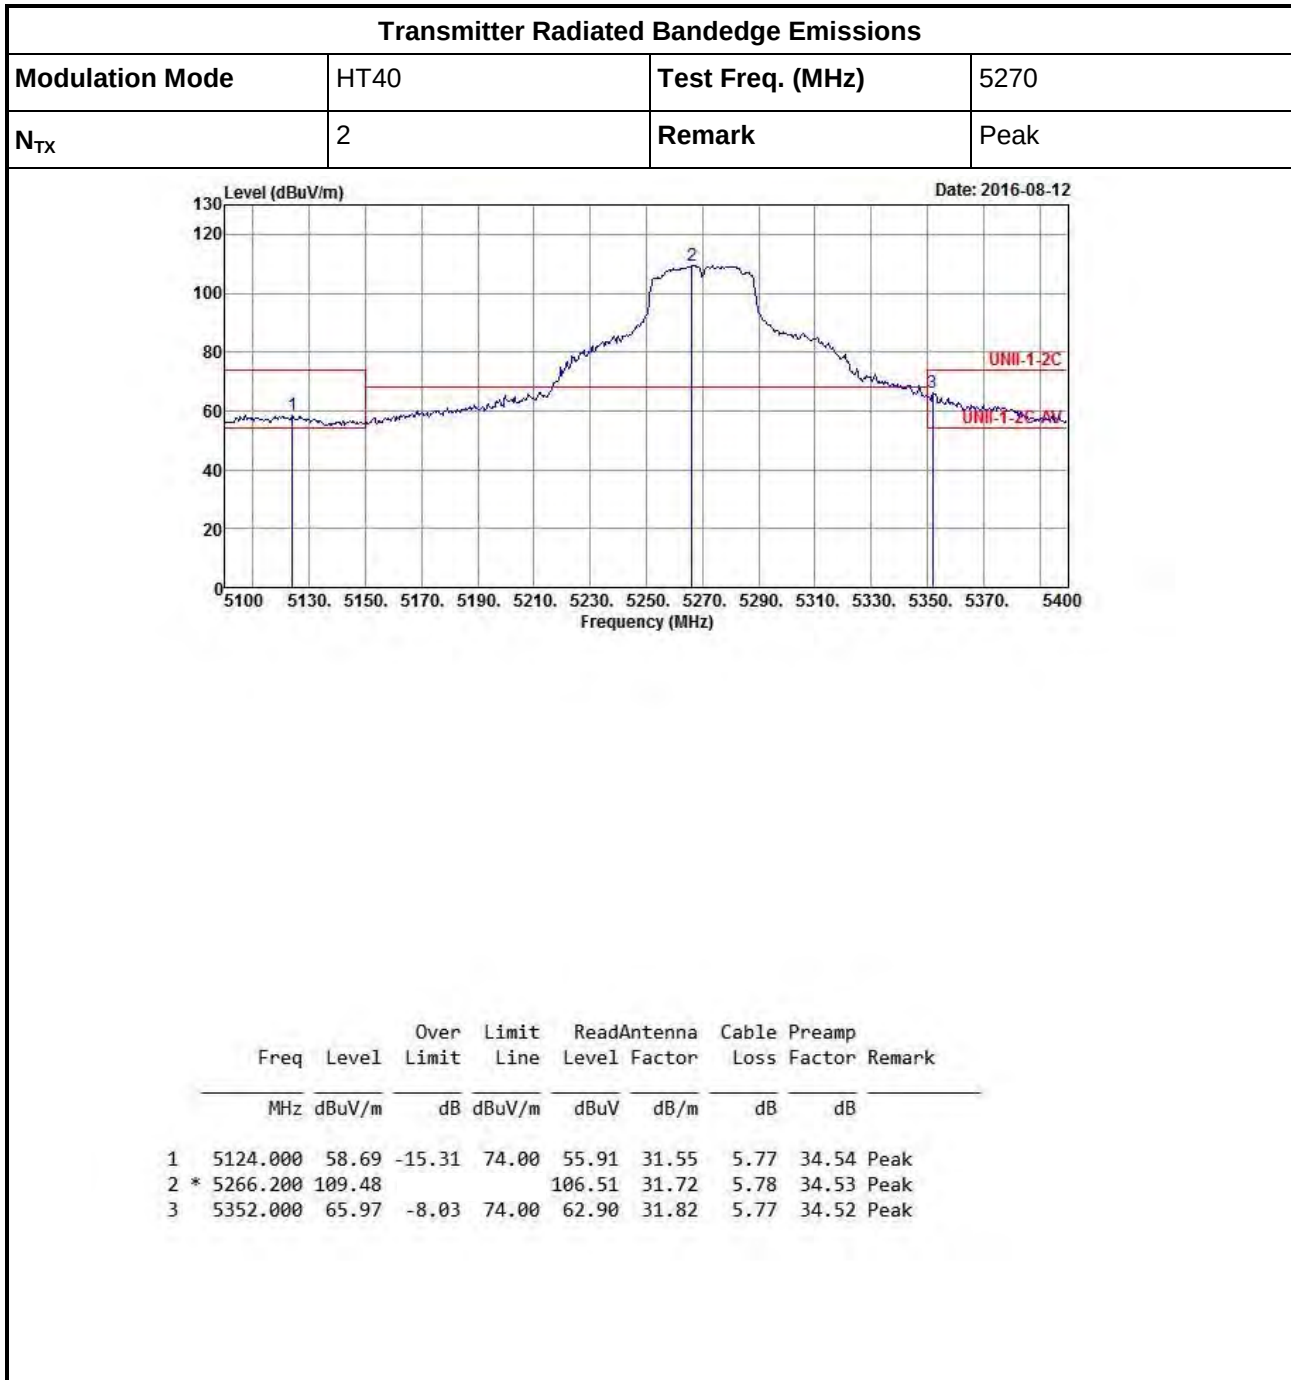



Transmitter Radiated Bandedge Emissions


Modulation Mode	HT40	Test Freq. (MHz)	5310
N _{TX}	2	Remark	Average

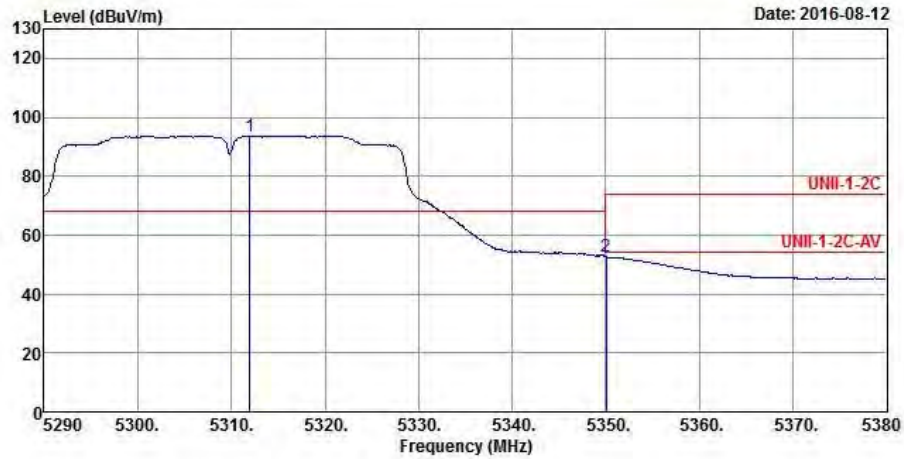



	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamplifier	Remark
	MHz	dBuV/m		dBuV/m	dBuV	dB/m	dB	dB	
1 *	5311.960	93.76			90.74	31.77	5.78	34.53	Average
2	5350.030	52.58	-1.42	54.00	49.51	31.82	5.77	34.52	Average

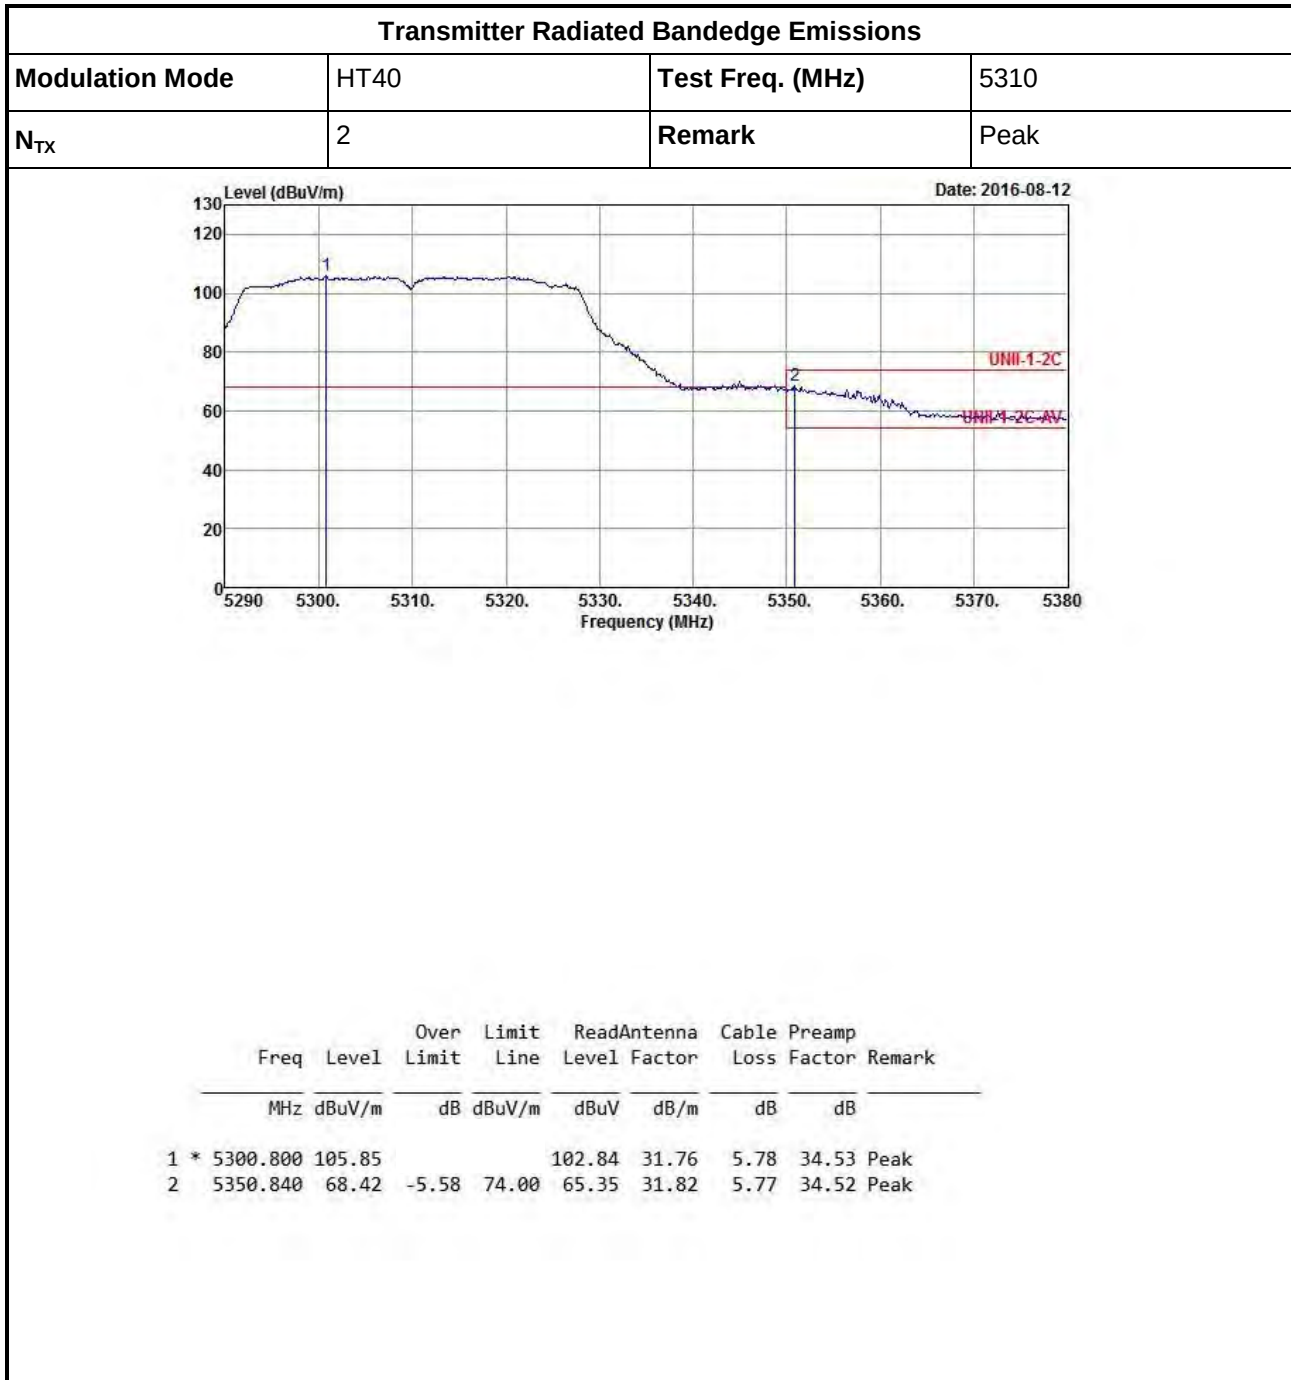


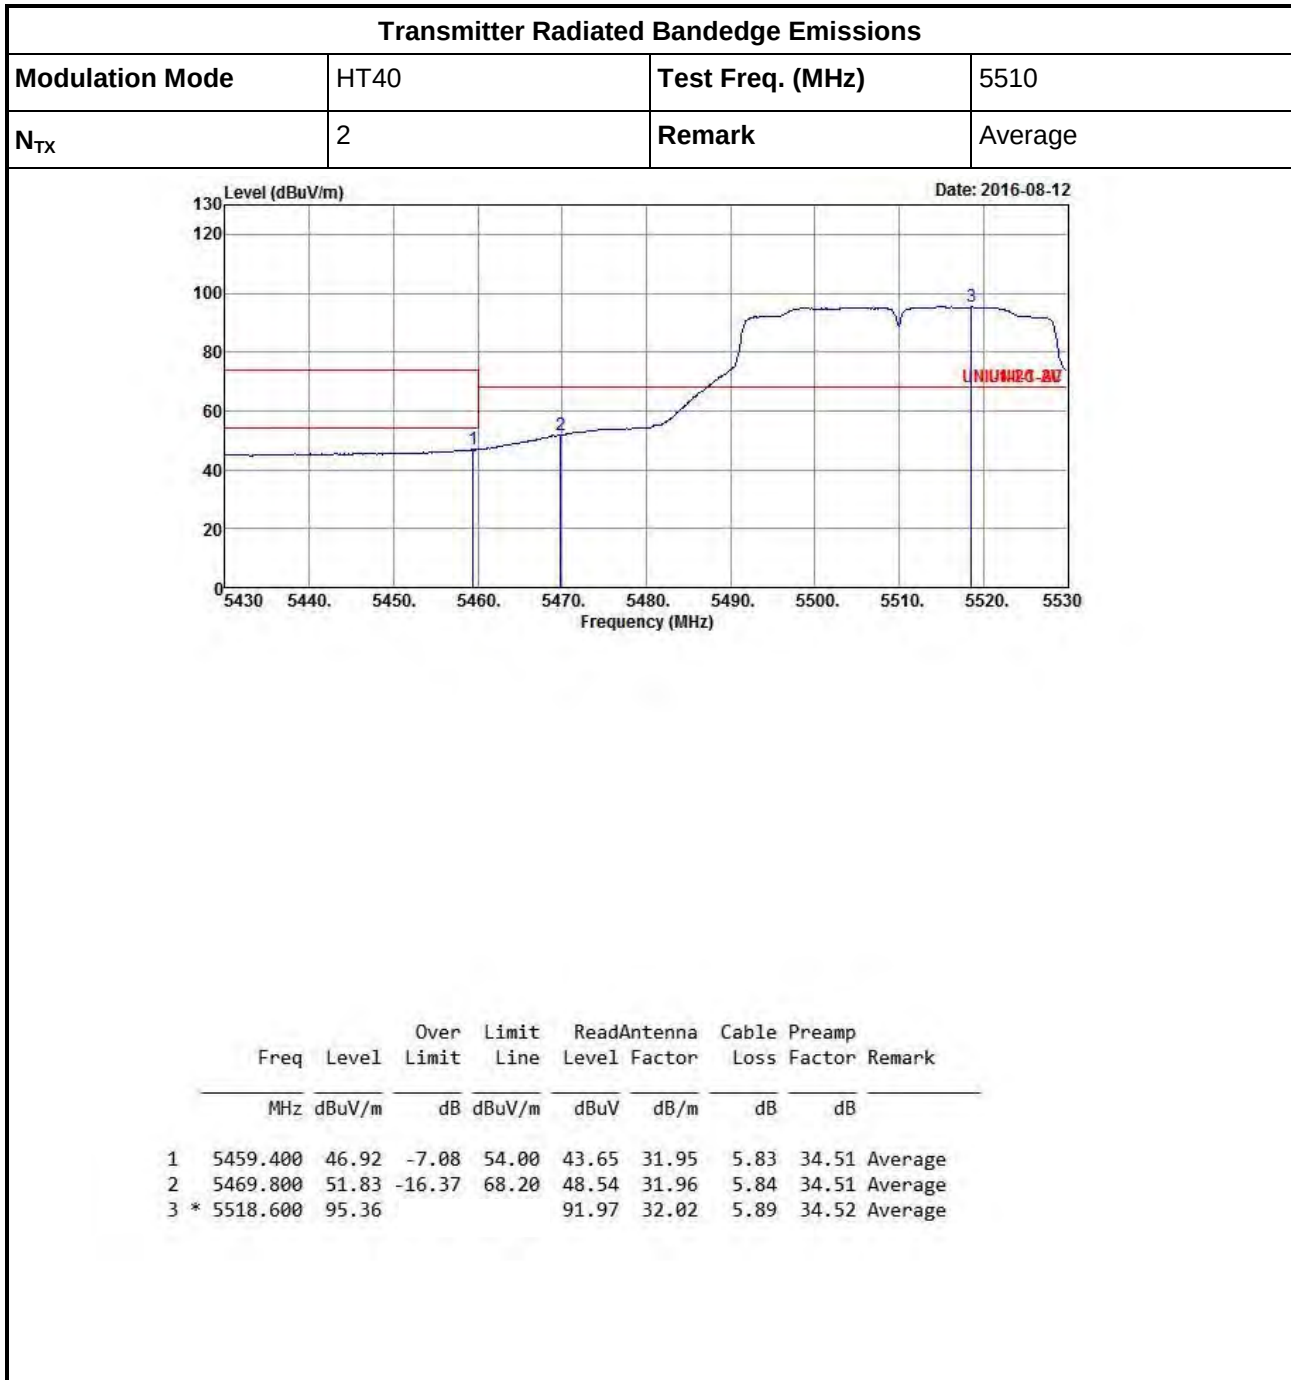

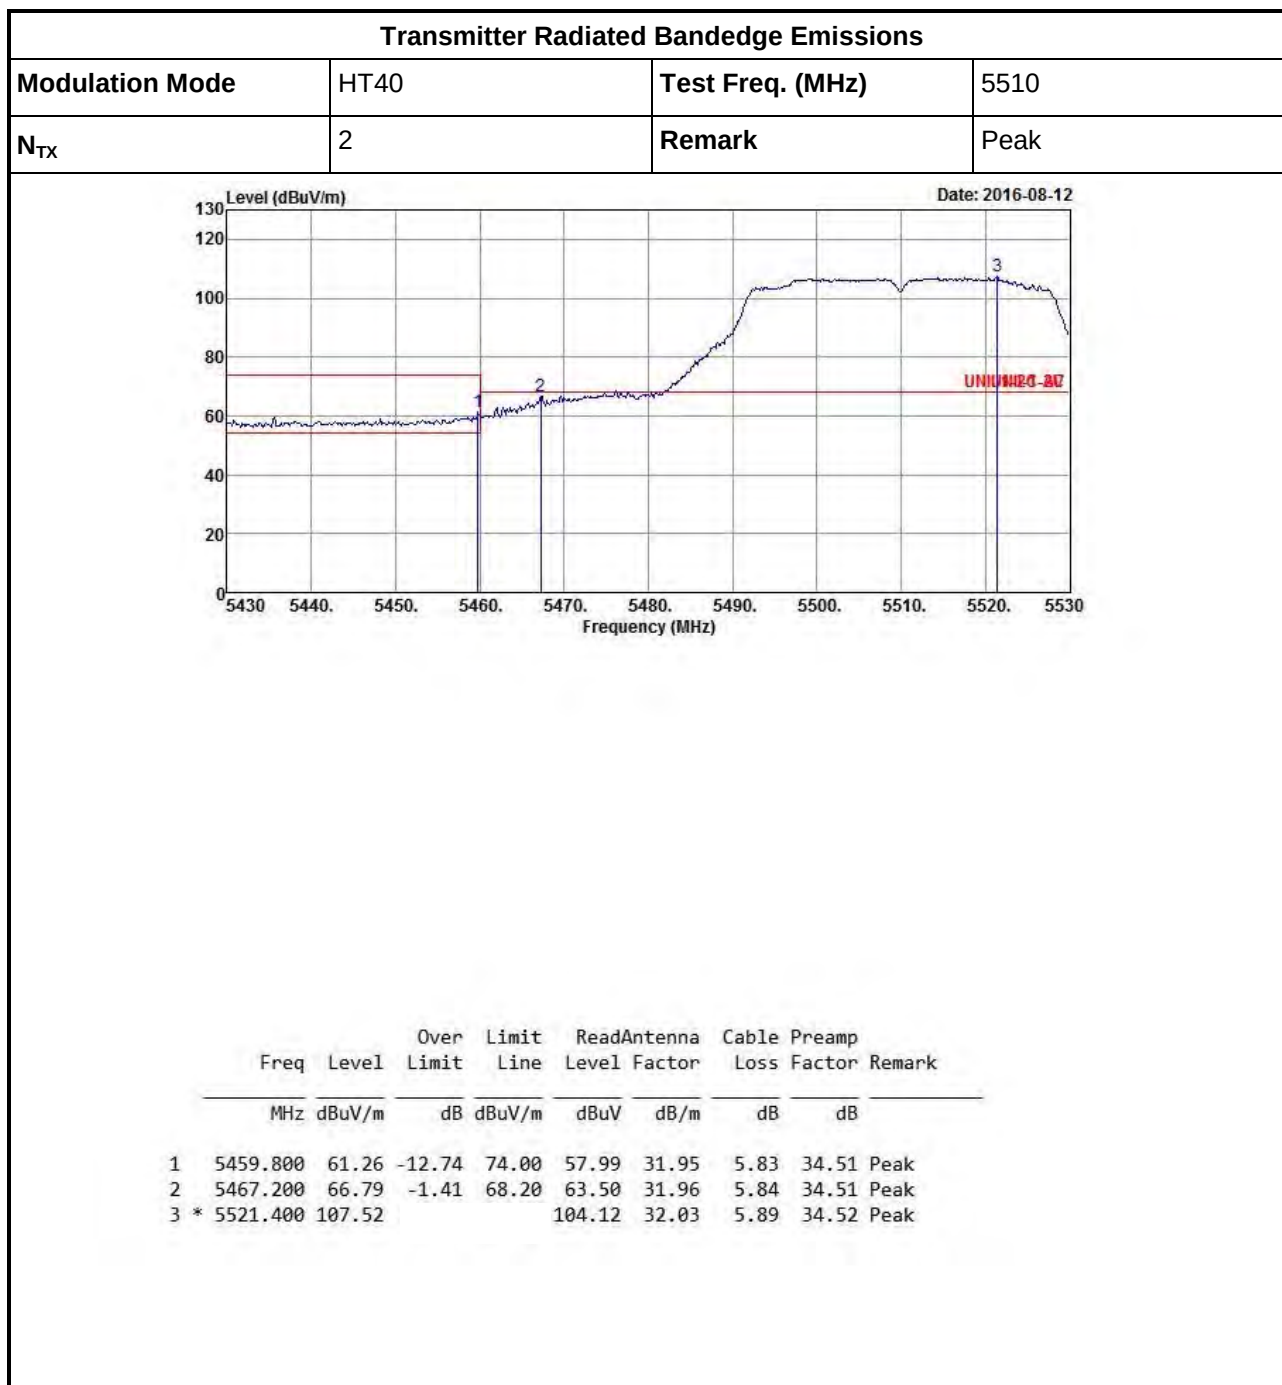


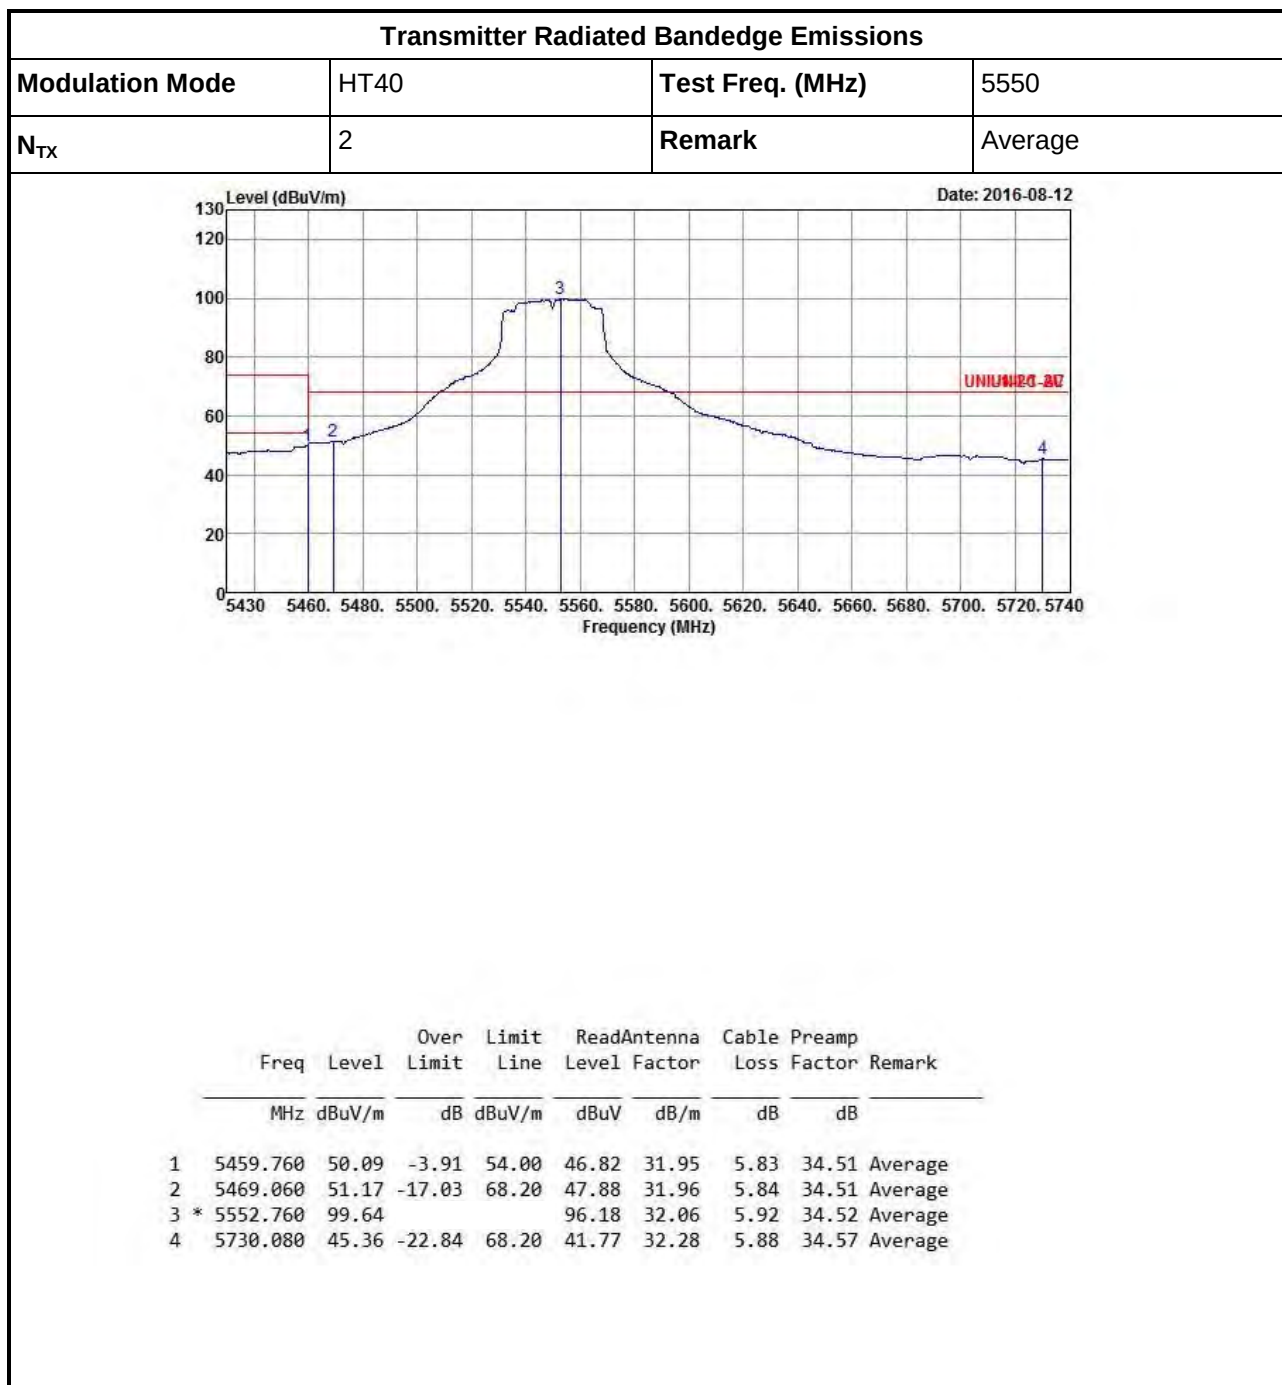


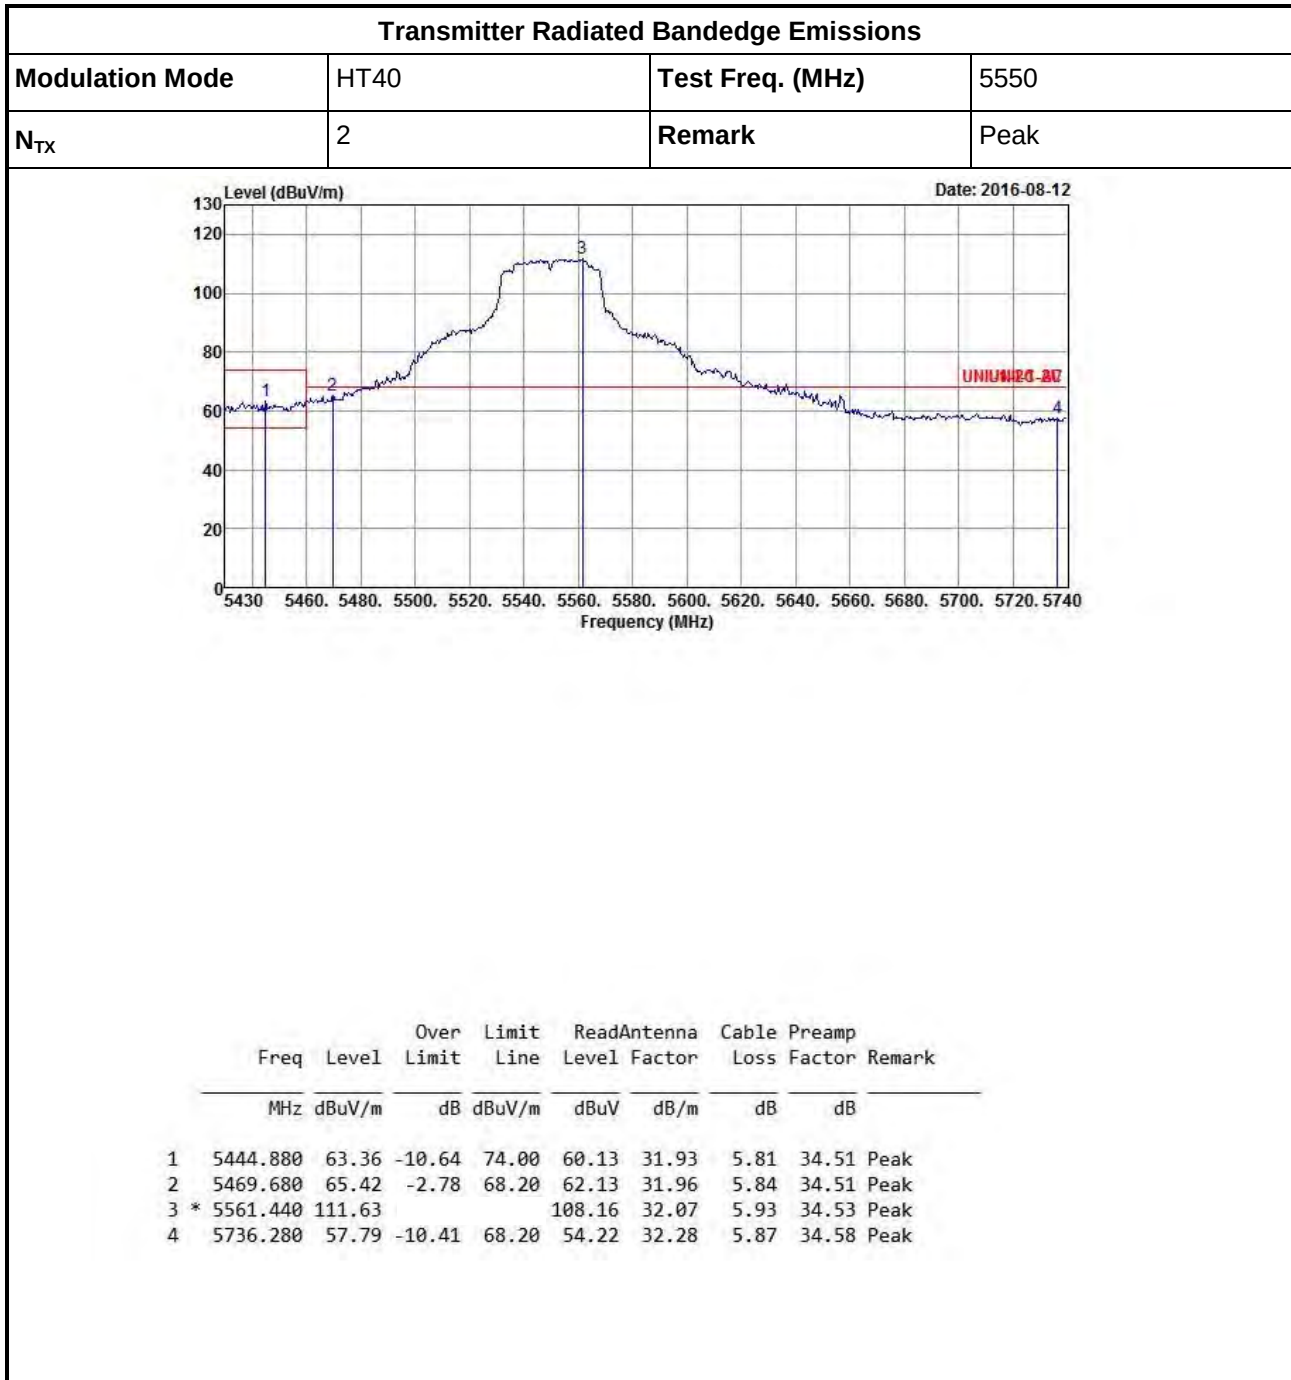


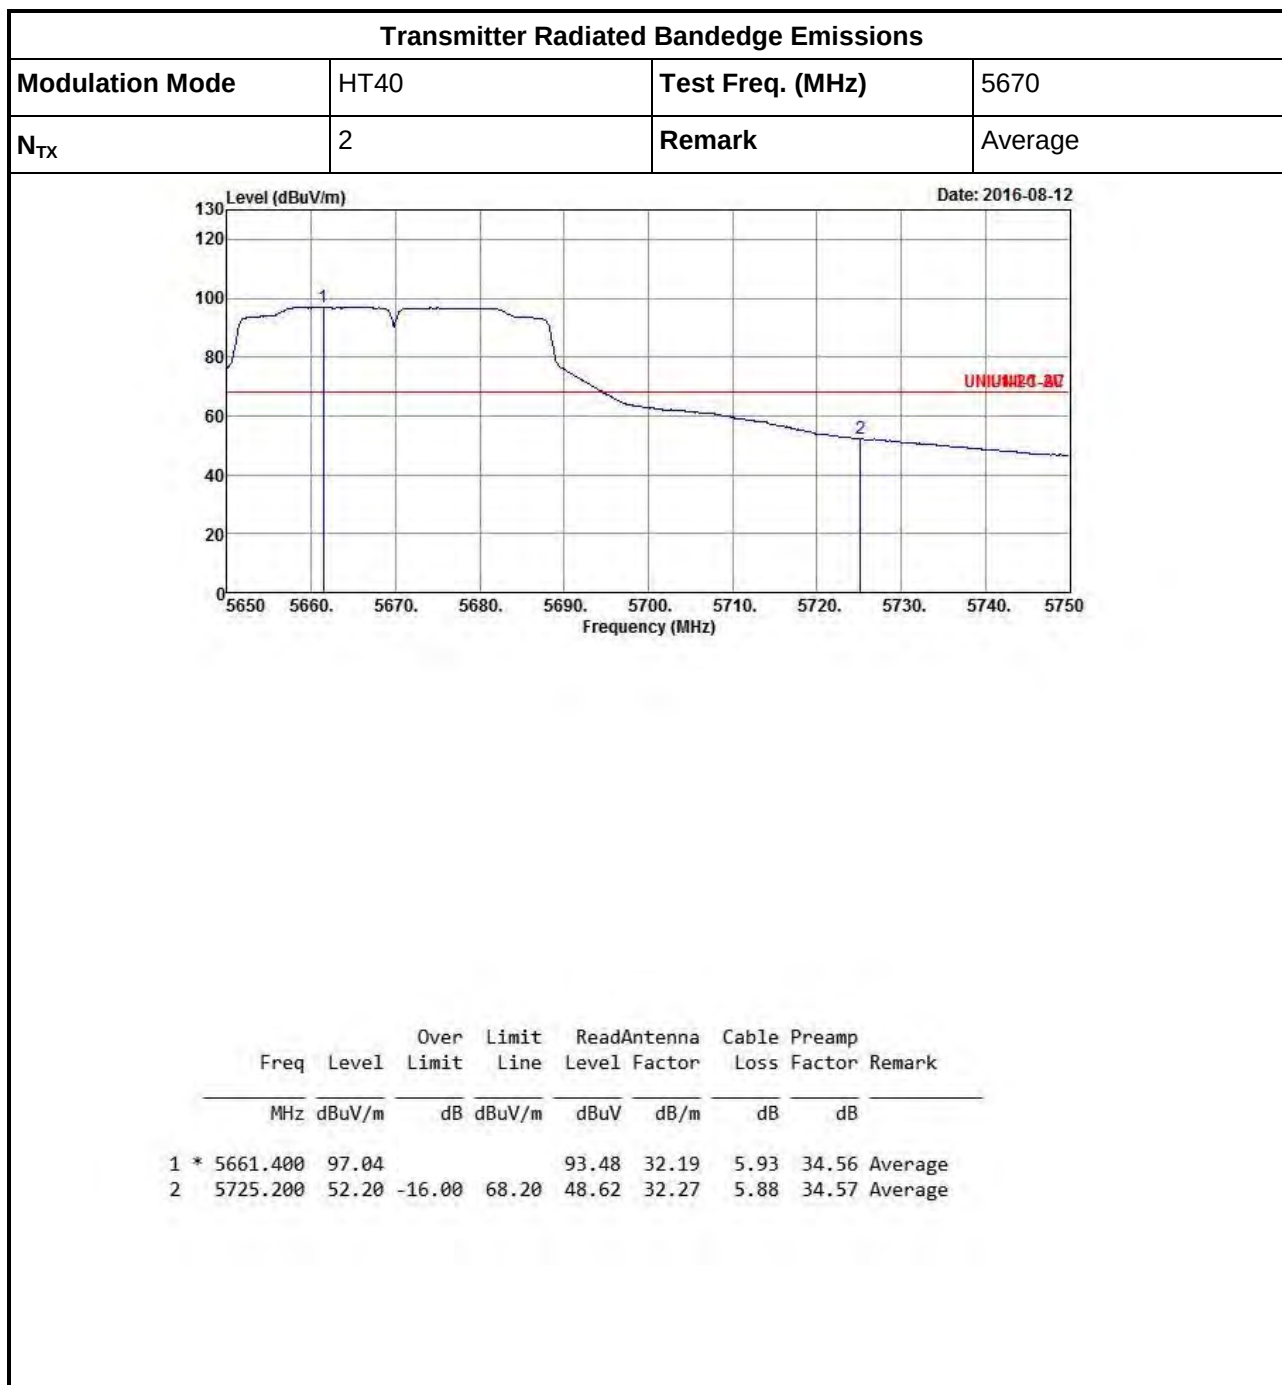




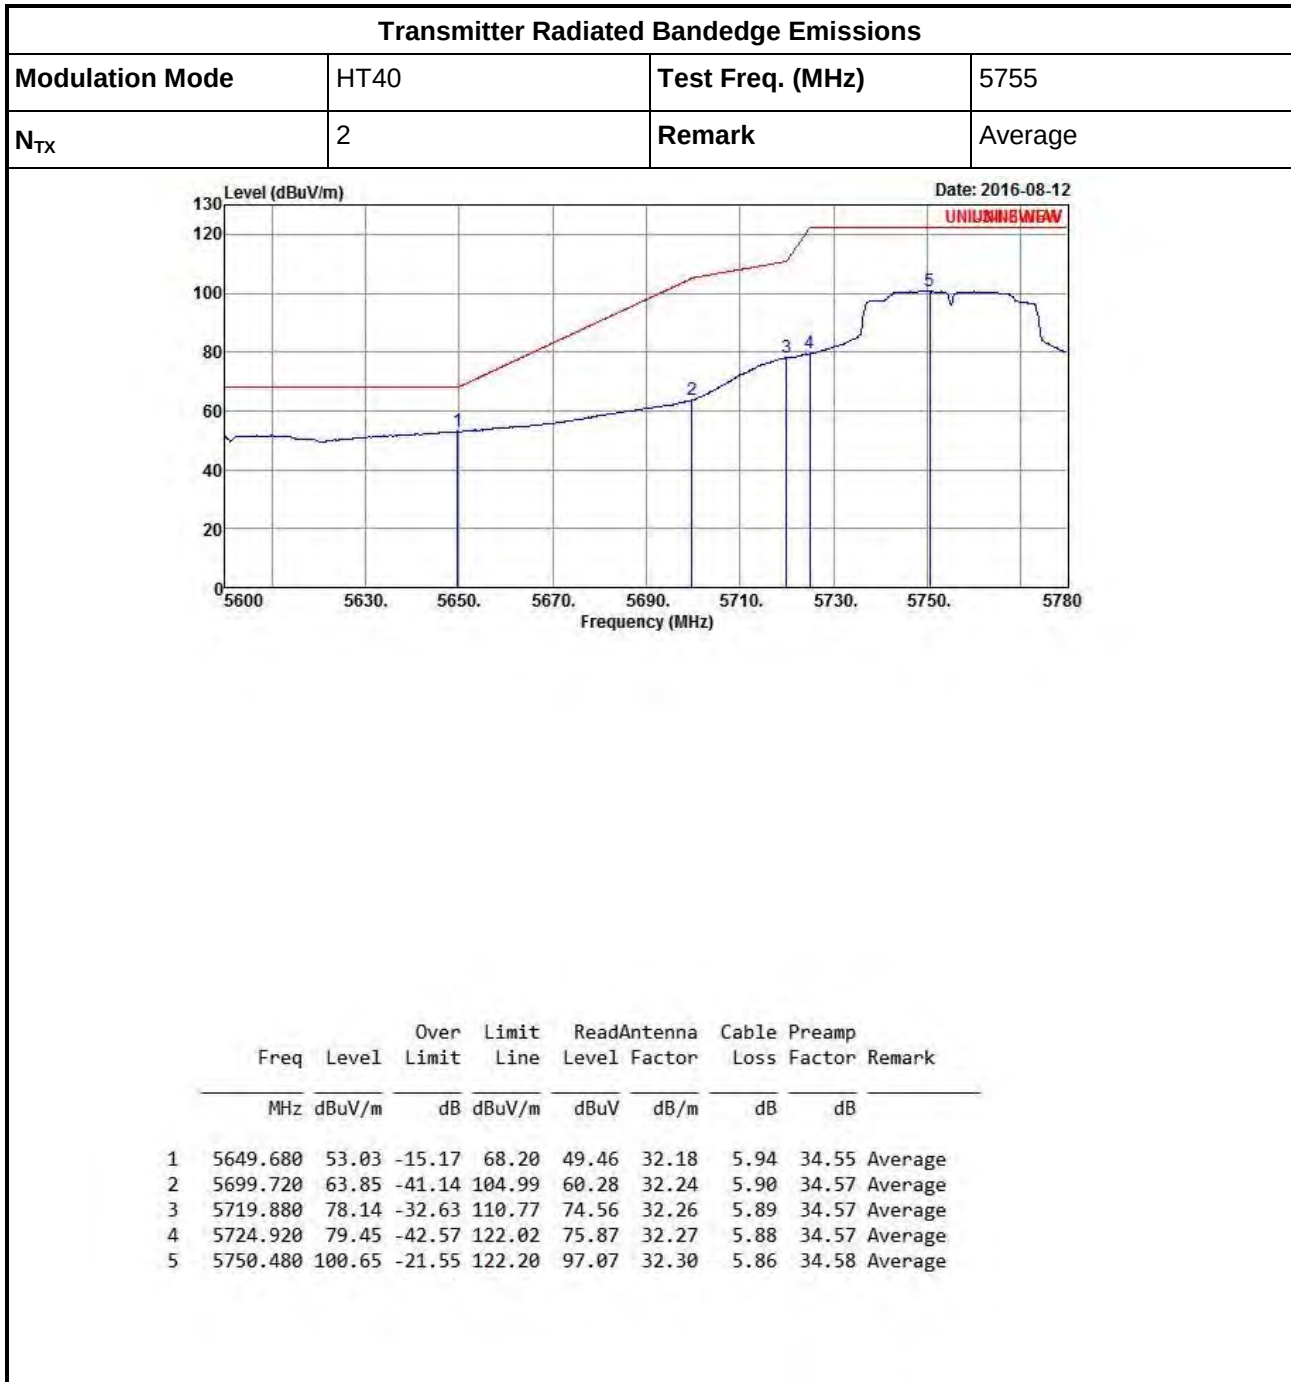

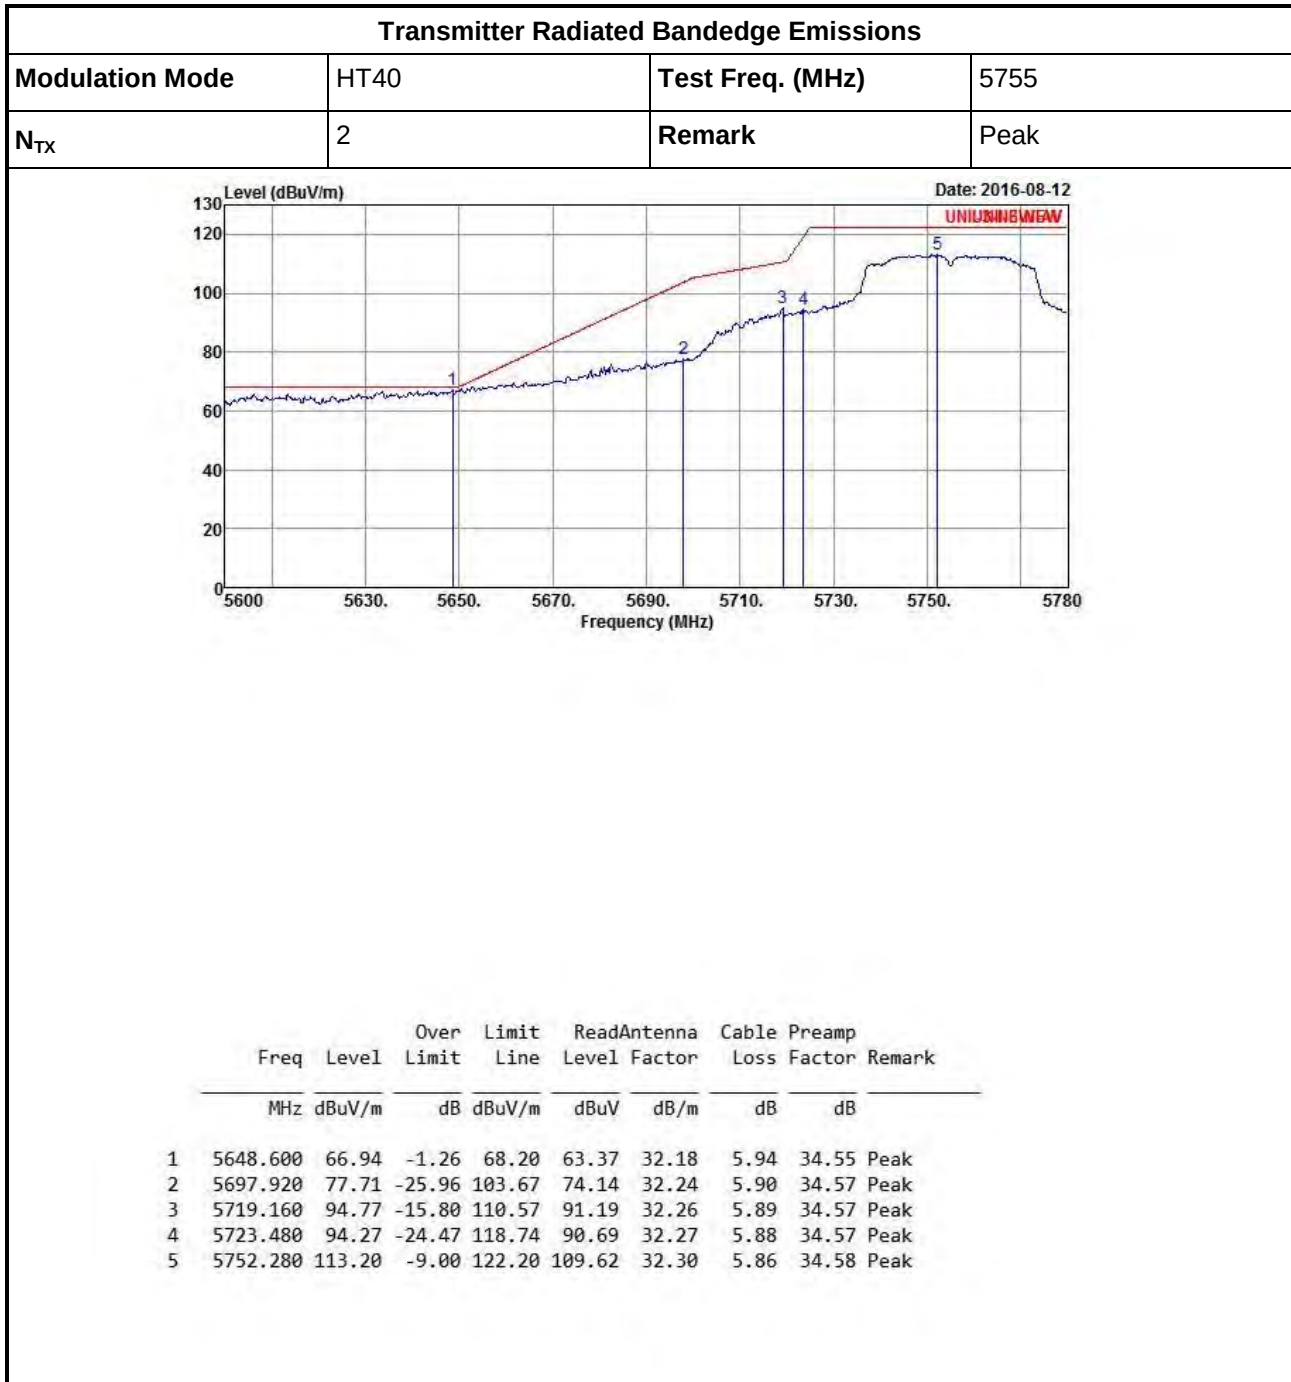


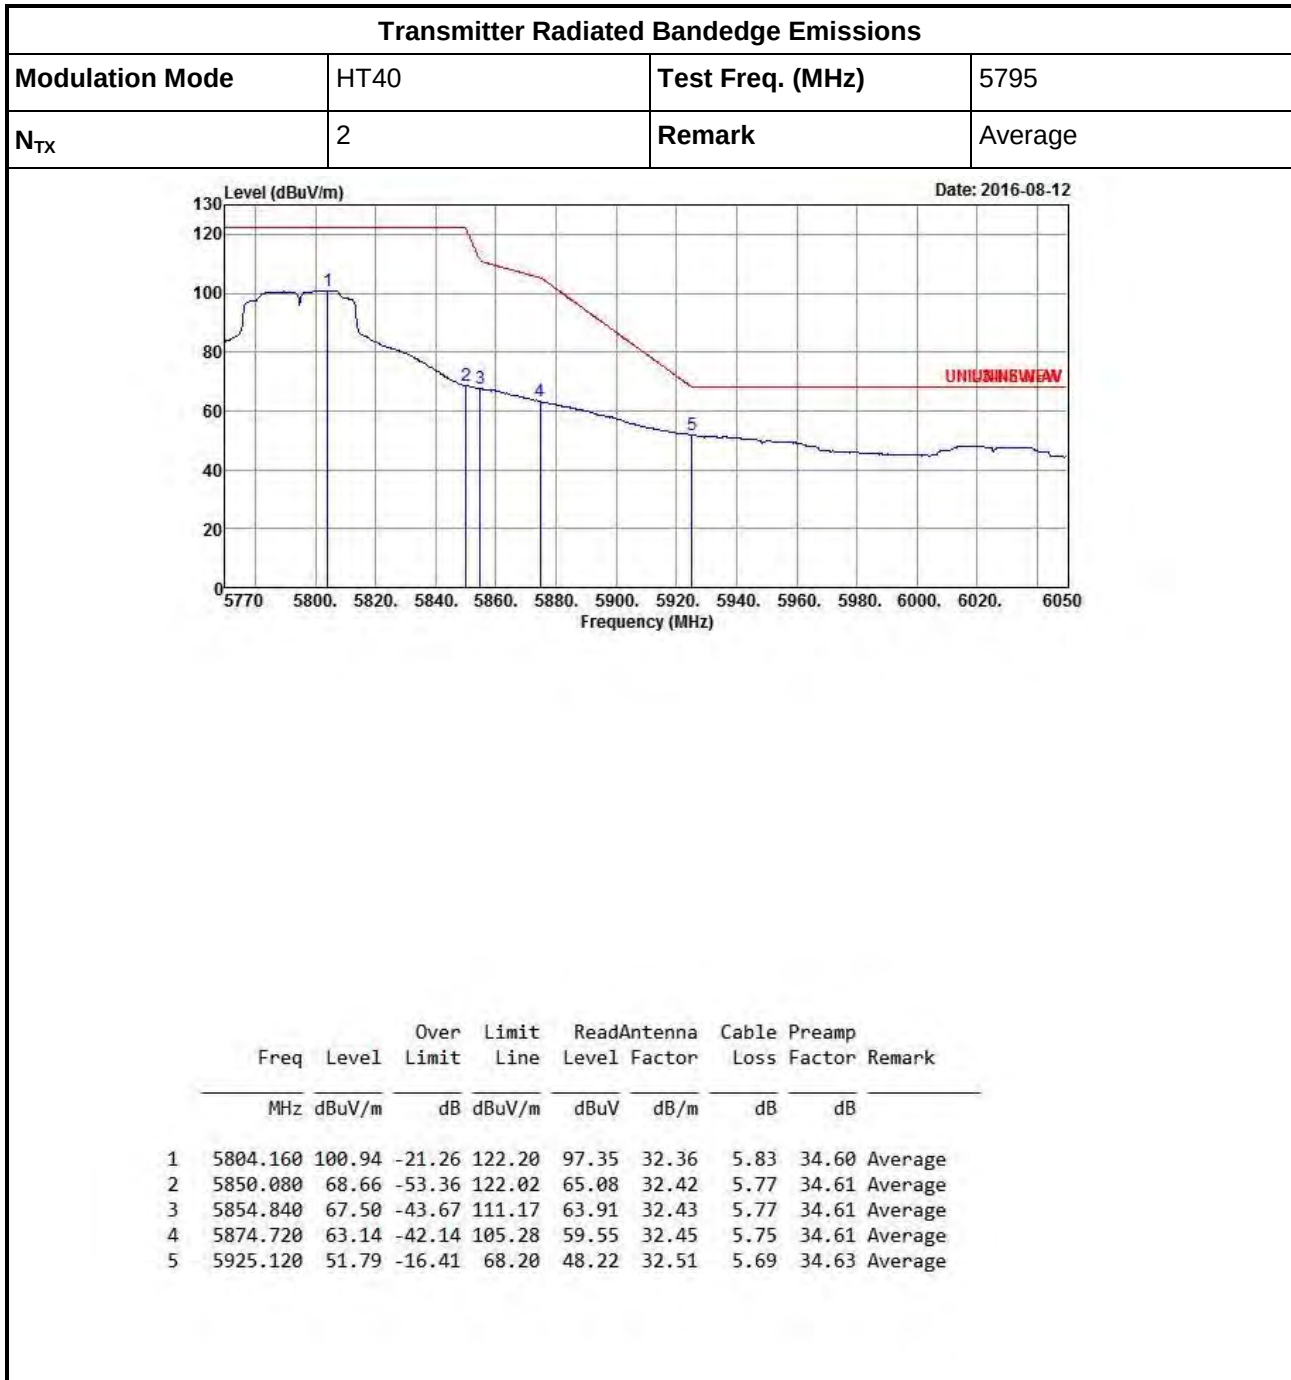

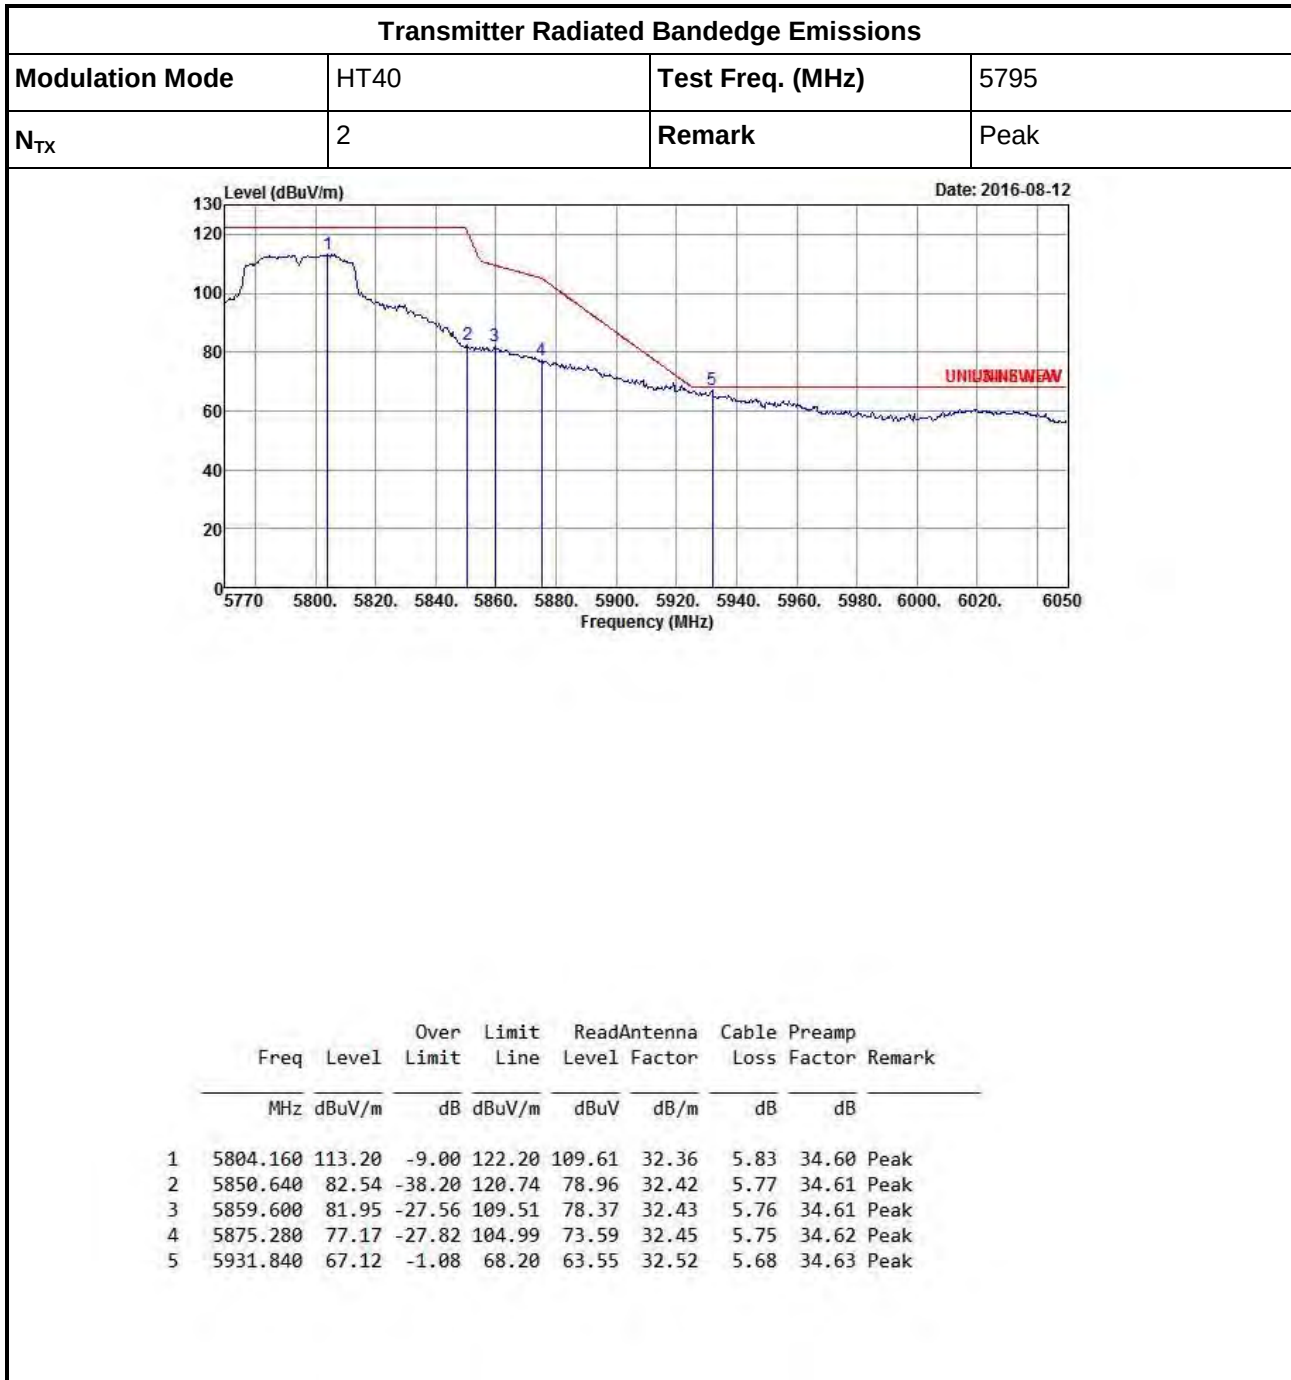

Transmitter Radiated Bandedge Emissions


Modulation Mode	VHT80	Test Freq. (MHz)	5210
N _{TX}	2	Remark	Average

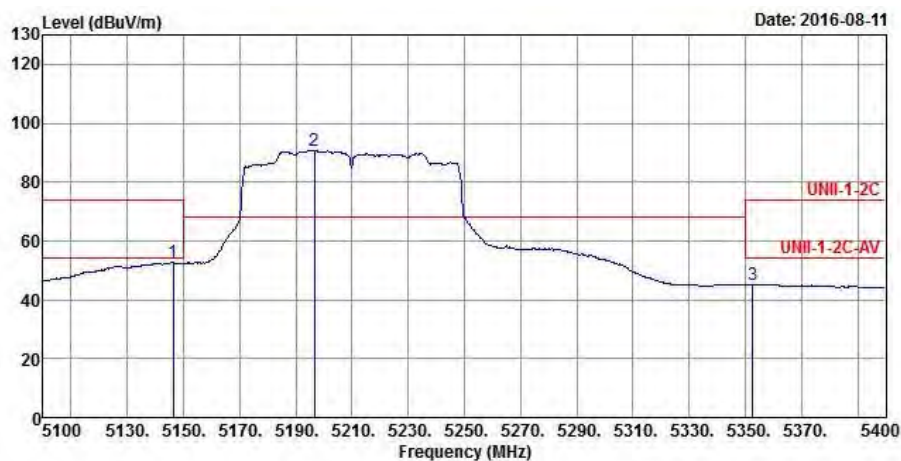


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB
1	5146.200	52.65	-1.35	54.00	49.83	31.58	5.78	34.54 Average
2 *	5196.600	90.86			87.96	31.64	5.79	34.53 Average
3	5352.600	45.12	-8.88	54.00	42.05	31.82	5.77	34.52 Average

Transmitter Radiated Bandedge Emissions

Modulation Mode	VHT80	Test Freq. (MHz)	5210
N _{TX}	2	Remark	Peak

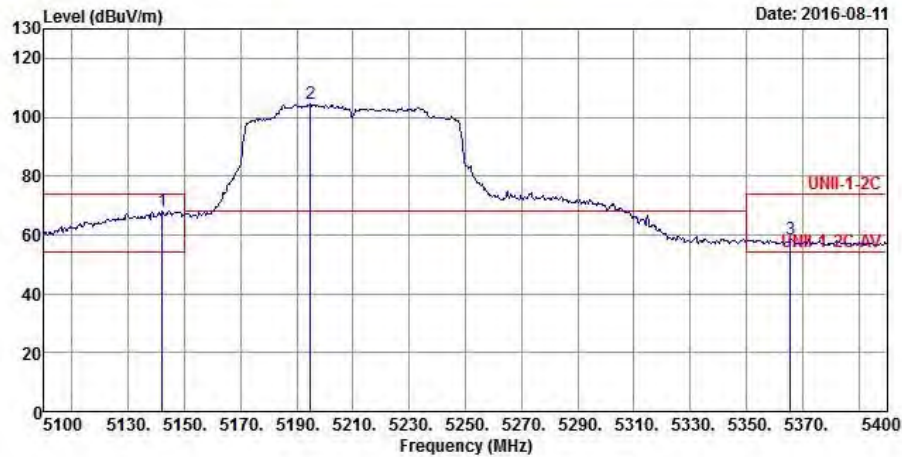


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	5142.000	68.24	-5.76	74.00	65.43	31.57	5.78	34.54 Peak
2 *	5194.800	104.50			101.61	31.63	5.79	34.53 Peak
3	5365.800	58.50	-15.50	74.00	55.41	31.84	5.77	34.52 Peak

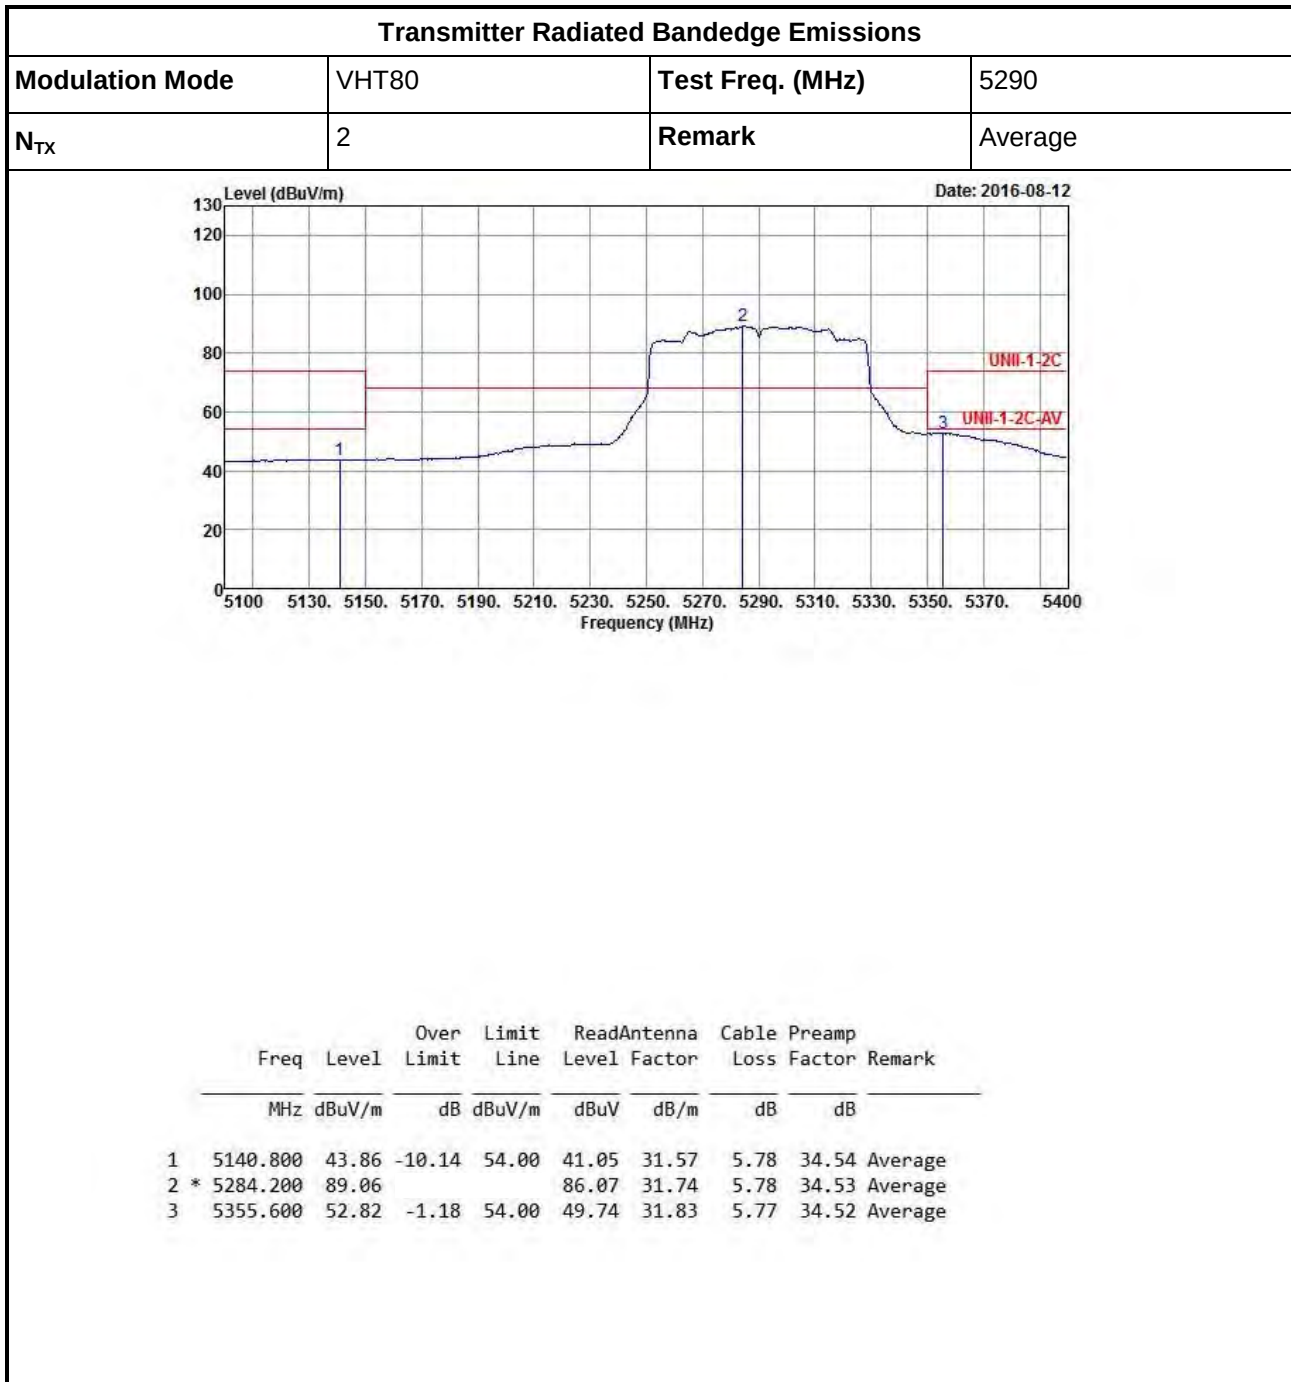



Transmitter Radiated Bandedge Emissions


Modulation Mode	VHT80	Test Freq. (MHz)	5290
N _{TX}	2	Remark	Peak

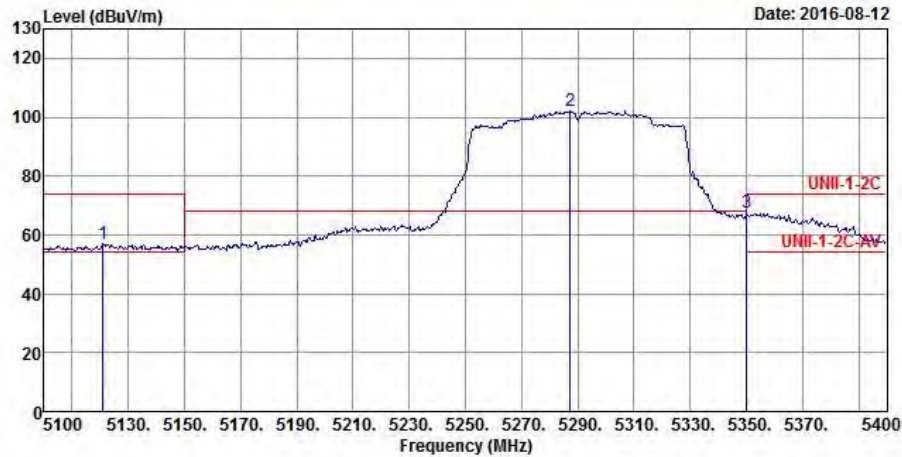

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp	Loss Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	5121.000	57.16	-16.84	74.00	54.38	31.55	5.77	34.54 Peak
2 *	5287.200	102.01			99.02	31.74	5.78	34.53 Peak
3	5350.200	67.42	-6.58	74.00	64.35	31.82	5.77	34.52 Peak

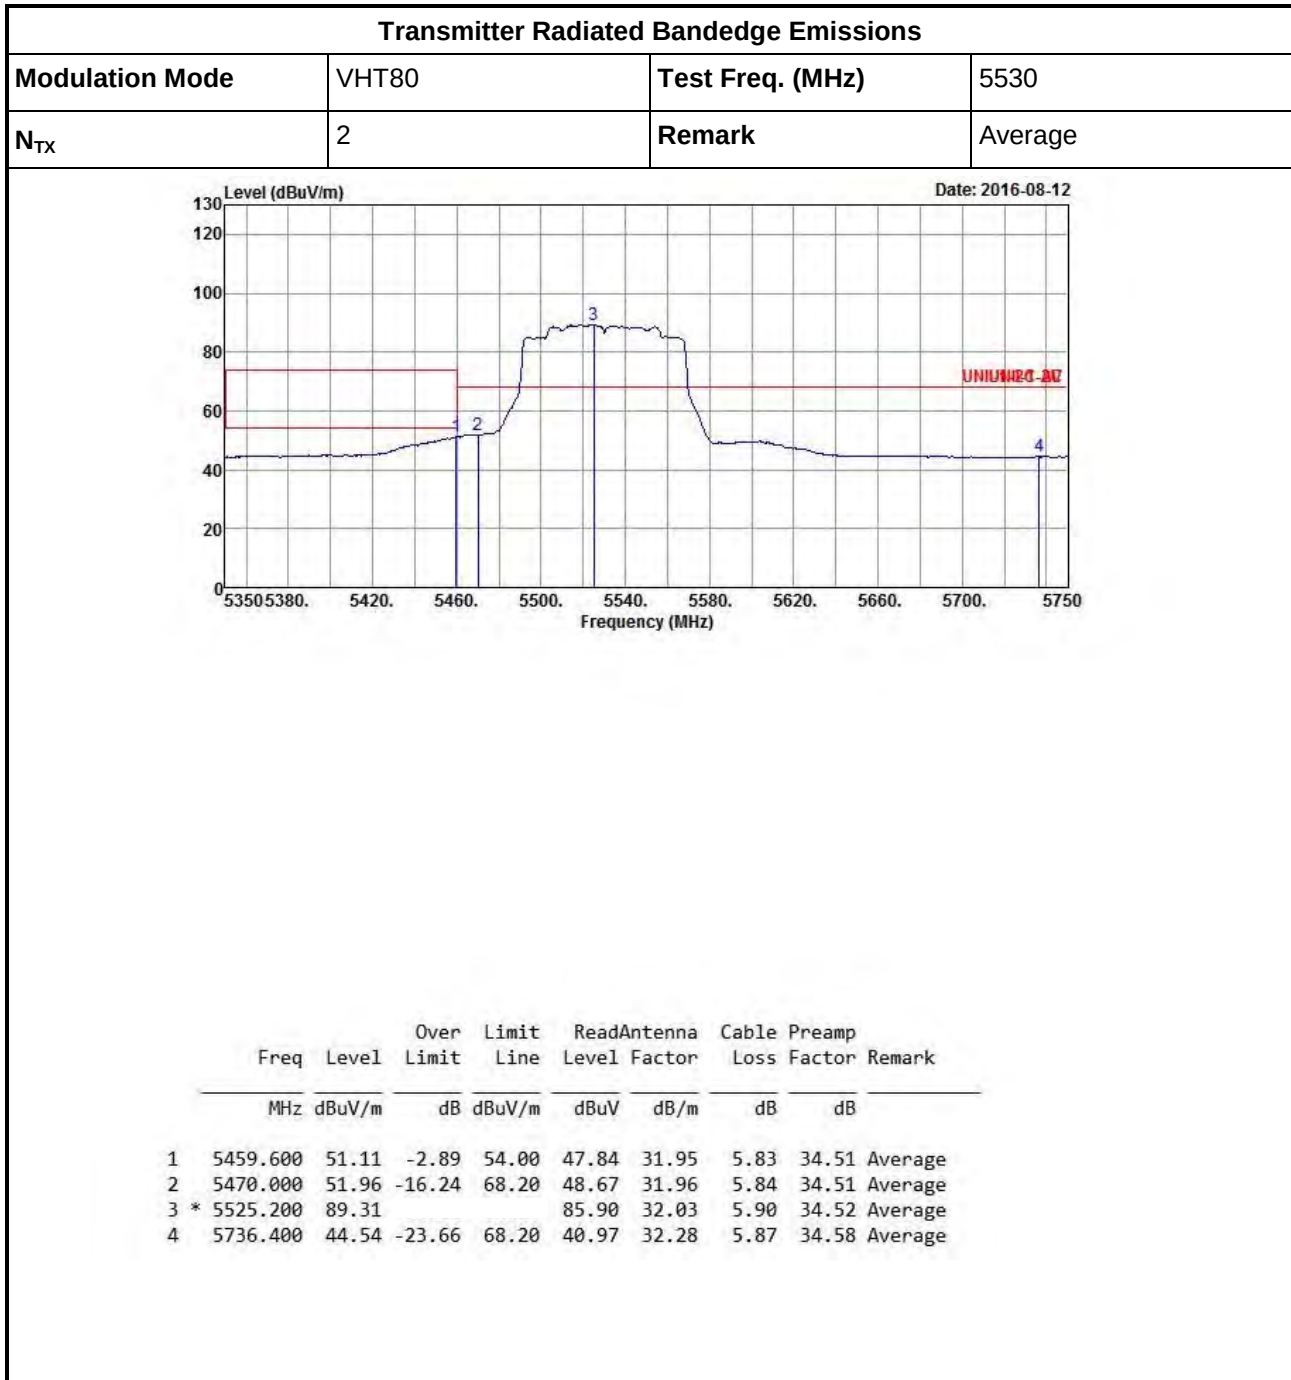


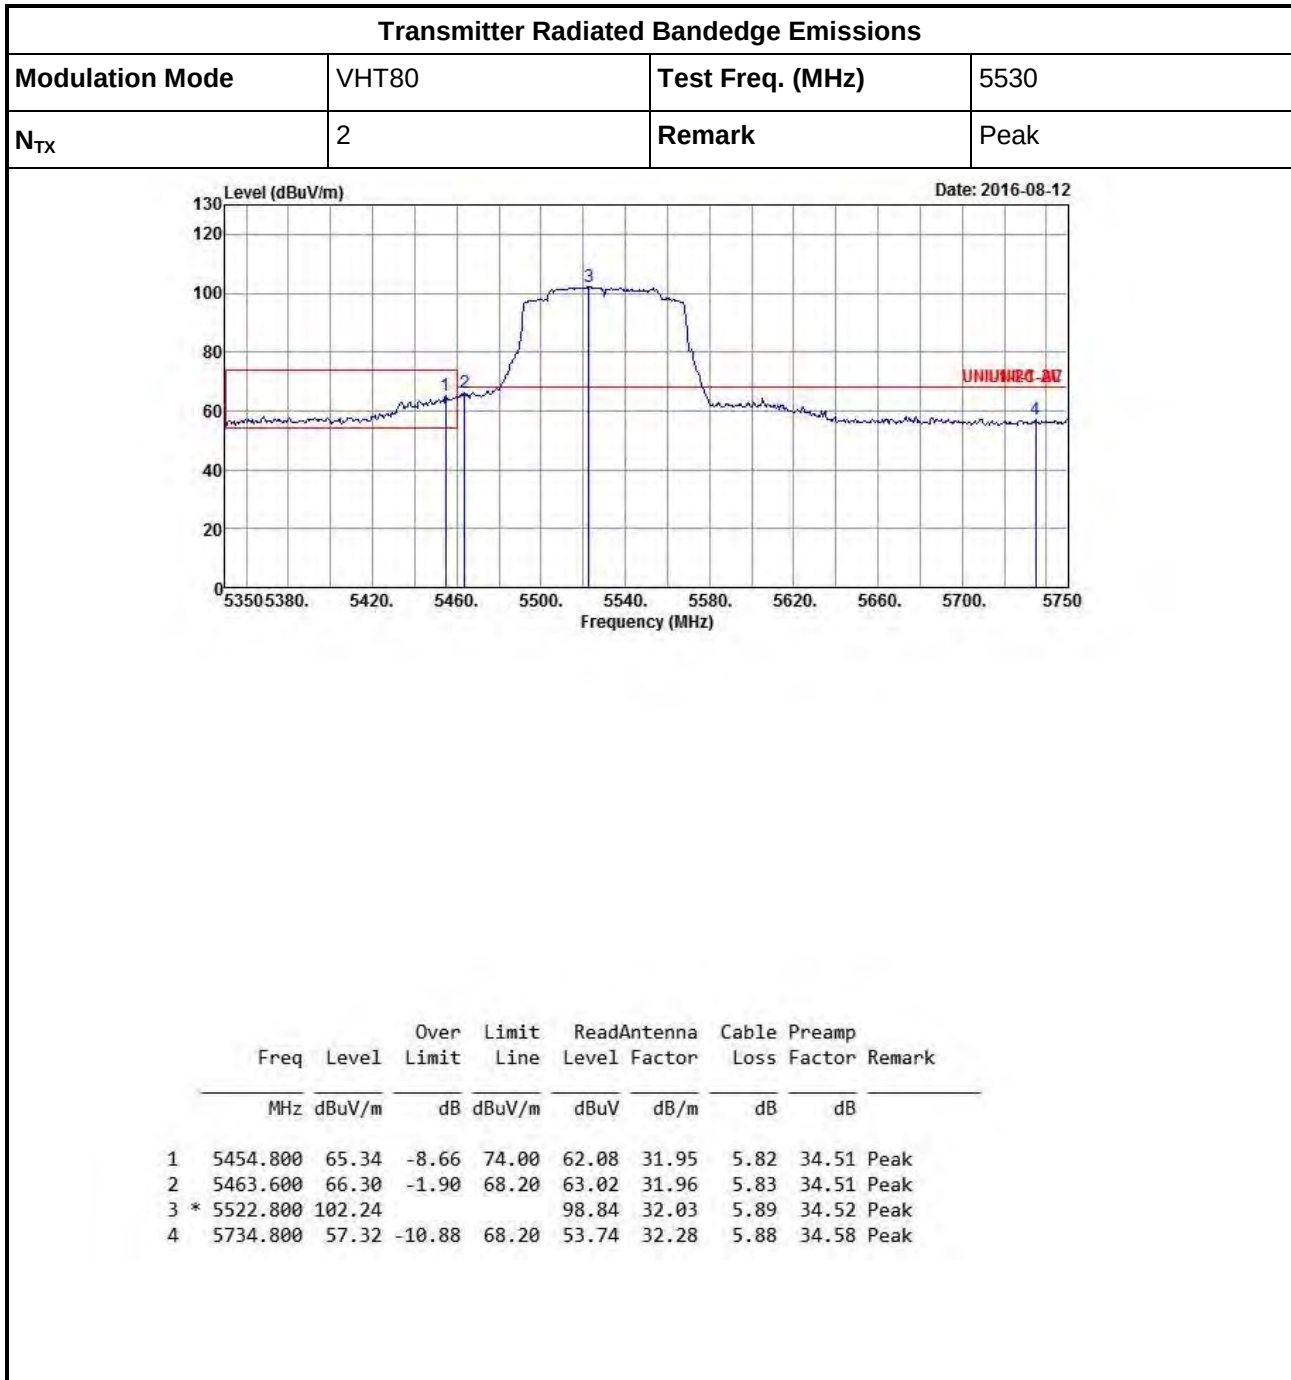

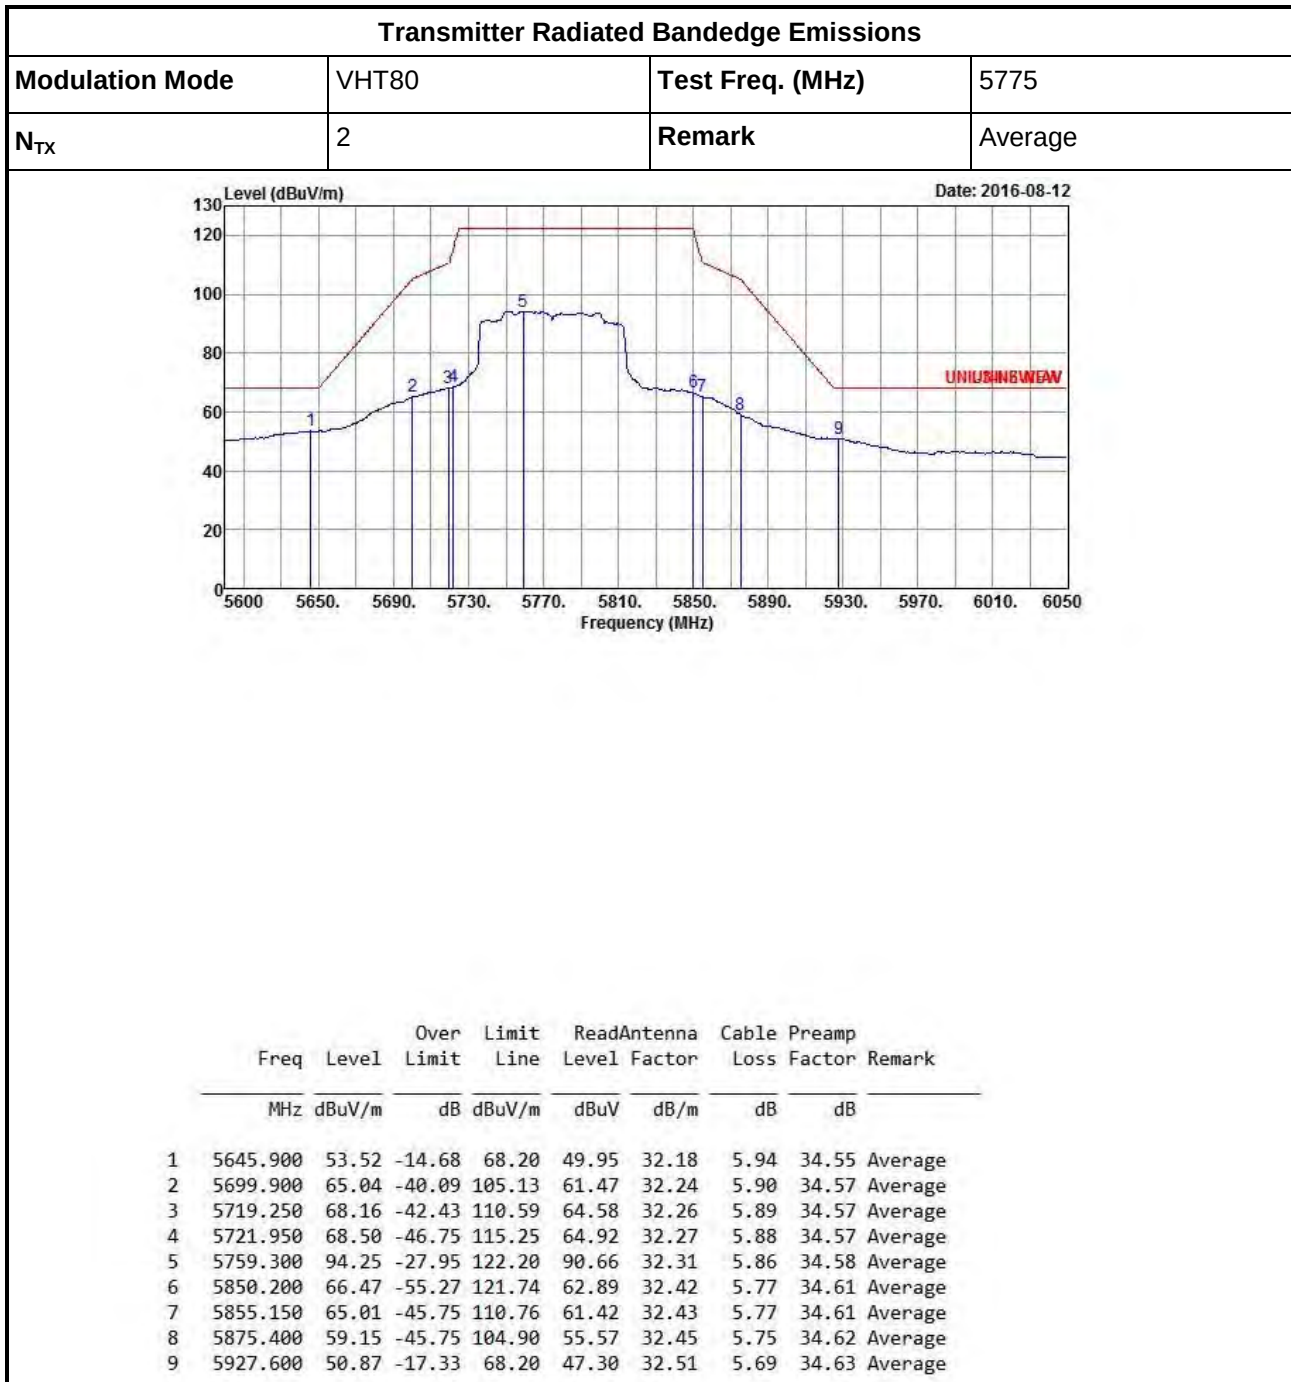

Transmitter Radiated Bandedge Emissions

Modulation Mode	VHT80	Test Freq. (MHz)	5775
N _{TX}	2	Remark	Peak

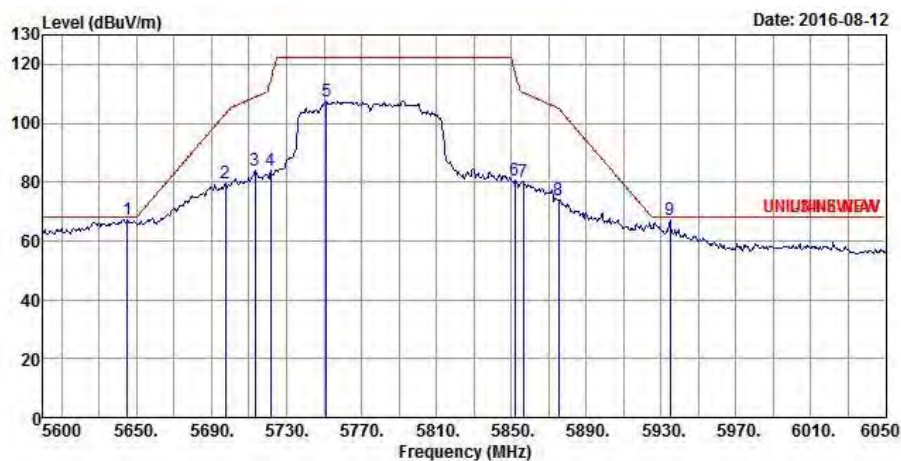

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB
1	5645.000	67.03	-1.17	68.20	63.47	32.17	5.94	34.55 Peak
2	5697.200	79.74	-23.40	103.14	76.17	32.24	5.90	34.57 Peak
3	5713.400	84.05	-24.90	108.95	80.47	32.26	5.89	34.57 Peak
4	5721.500	83.92	-30.30	114.22	80.34	32.27	5.88	34.57 Peak
5	5751.200	107.51	-14.69	122.20	103.93	32.30	5.86	34.58 Peak
6	5852.000	80.41	-37.23	117.64	76.83	32.42	5.77	34.61 Peak
7	5856.500	80.23	-30.15	110.38	76.64	32.43	5.77	34.61 Peak
8	5875.400	74.06	-30.84	104.90	70.48	32.45	5.75	34.62 Peak
9	5934.800	67.04	-1.16	68.20	63.47	32.52	5.68	34.63 Peak