

FCC Test Report

Equipment : LCD Tablet
Brand Name : Wacom
Model No. : DTK-2241
Reference number: JS-15122
FCC ID : HV4DTK2241
Standard : 47 CFR FCC Part 15.209
Operating Band : 667 kHz (channel frequency 667kHz)
Equipment Class : DCD
Applicant : Wacom Co., Ltd.
2-510-1, Toyonodai, Kazo-shi, Saitama,
349-1148 Japan

The product sample received on Jan. 30, 2013 and completely tested on Feb. 20, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:


Wayne Hsu / Assistant Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories and Support Equipment.....	6
1.3	Testing Applied Standards	6
1.4	Testing Location Information	6
1.5	Measurement Uncertainty	7
2	TEST CONFIGURATION OF EUT	8
2.1	The Worst Case Modulation Configuration	8
2.2	Test Channel Frequencies Configuration.....	8
2.3	The Worst Case Measurement Configuration	8
2.4	Test Setup Diagram	9
3	TRANSMITTER TEST RESULT	11
3.1	AC Power-line Conducted Emissions	11
3.2	Transmitter Radiated Emissions.....	15
4	TEST EQUIPMENT AND CALIBRATION DATA.....	25
APPENDIX A. TEST PHOTOS		A5
APPENDIX B. PHOTOGRAPHS OF EUT		B13

Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.3	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.3847160MHz 36.50 (Margin 11.68dB) - AV 41.52 (Margin 16.66dB) - QP	FCC 15.207	Complied
3.2	15.209	Transmitter Radiated Unwanted Emissions	[dBuV/m at 3m]: 667.4kHz 56.10 (Margin 15.02dB) - QP [dBuV/m at 3m]: 126.030MHz 37.58 (Margin 5.92dB) – PK	FCC 15.209	Complied



SPORTON INTERNATIONAL INC.
TEL : 886-3-327-3456
FAX : 886-3-327-0973

1 General Description

1.1 Information

1.1.1 Manufacturer

Qisda Corporation

157 & 159, Shan-Ying Road, Gueishan, Taoyuan, Taiwan

Qisda (Suzhou) Co., Ltd.

169, Zhujiang Road, New District, Suzhou, Jiangsu Province, P.R. China

Qisda Optronics (Suzhou) Co., Ltd.

169, Zhujiang Road, New District, Suzhou, Jiangsu 215129, P.R. China

Qisda Mexicana S.A. De C.V.

Calzada Venustiano Carranza, No. 88 Col. Plutarco Elias Calles, Mexocali B.C. Mexico C.P 21376 Mexico

1.1.2 RF General Information

RF General Information				
Frequency Range	Modulation	Ch. Frequency (kHz)	Channel Number	Field Strength (dBuV/m)
667 kHz	Array Coil Pointing	667	1	56.10
Note 1: Field strength performed quasi peak level at 3m.				

1.1.3 Antenna Information

Antenna Category	
☐	Equipment placed on the market without antennas
☒	Integral antenna (antenna permanently attached)
☐	External antenna (dedicated antennas)

1.1.4 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	☐ Production ; ☒ Pre-Production ; ☐ Prototype
Type of EUT	
☒	Stand-alone
☐	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
☐	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
☐	Other:

1.2 Accessories and Support Equipment

Accessories Information				
AC Adapter	Brand Name	AOEM	Model Name	A060212-TD1
	Power Rating	I/P: 100-240V ~ 47-63Hz 1.8A ; O/P: 12V  5A		
Digital Pen	Brand Name	Wacom	Model Name	KP-502

Reminder: Regarding to more detail and other information, please refer to user manual.

Support Equipment				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Notebook	DELL	Vostro 3350	DoC

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2009

1.4 Testing Location Information

Testing Location				
☒	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
		TEL : 886-3-327-3456 FAX : 886-3-327-0973		
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Zeus	24.3°C / 54.8%	20-Feb.-13
Radiated Emission	03CH03-HY	Vic	24.3°C / 64%	08-Feb.-13

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth		±1.42 %	N/A
Unwanted emissions, conducted	9 – 150 kHz	±0.38 dB	N/A
	0.15 – 30 MHz	±0.42 dB	N/A
	30 – 1000 MHz	±0.51 dB	N/A
All emissions, radiated	9 – 150 kHz	±2.49 dB	N/A
	0.15 – 30 MHz	±2.28 dB	N/A
	30 – 1000 MHz	±2.56 dB	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Modulation Used for Conformance Testing	
Modulation Mode	Field Strength (dBuV/m at 3m)
Touch Panel-Array Coil Pointing	56.10

2.2 Test Channel Frequencies Configuration


Test Channel Frequencies Configuration	
Modulation Mode	Test Channel Frequencies (kHz)
Touch Panel-Array Coil Pointing	667-(F1)


2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	AC Power & Touch Panel-Array Coil Pointing

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth, Field Strength of Fundamental Emissions Spectrum Mask, Transmitter Radiated Unwanted Emissions Frequency Stability
Test Condition	Radiated measurement
User Position	☒ EUT will be placed in fixed position.
	☐ EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes.
	☐ EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes.
Operating Mode	☒ 1. AC Power & Touch Panel-Array Coil Pointing

2.4 Test Setup Diagram

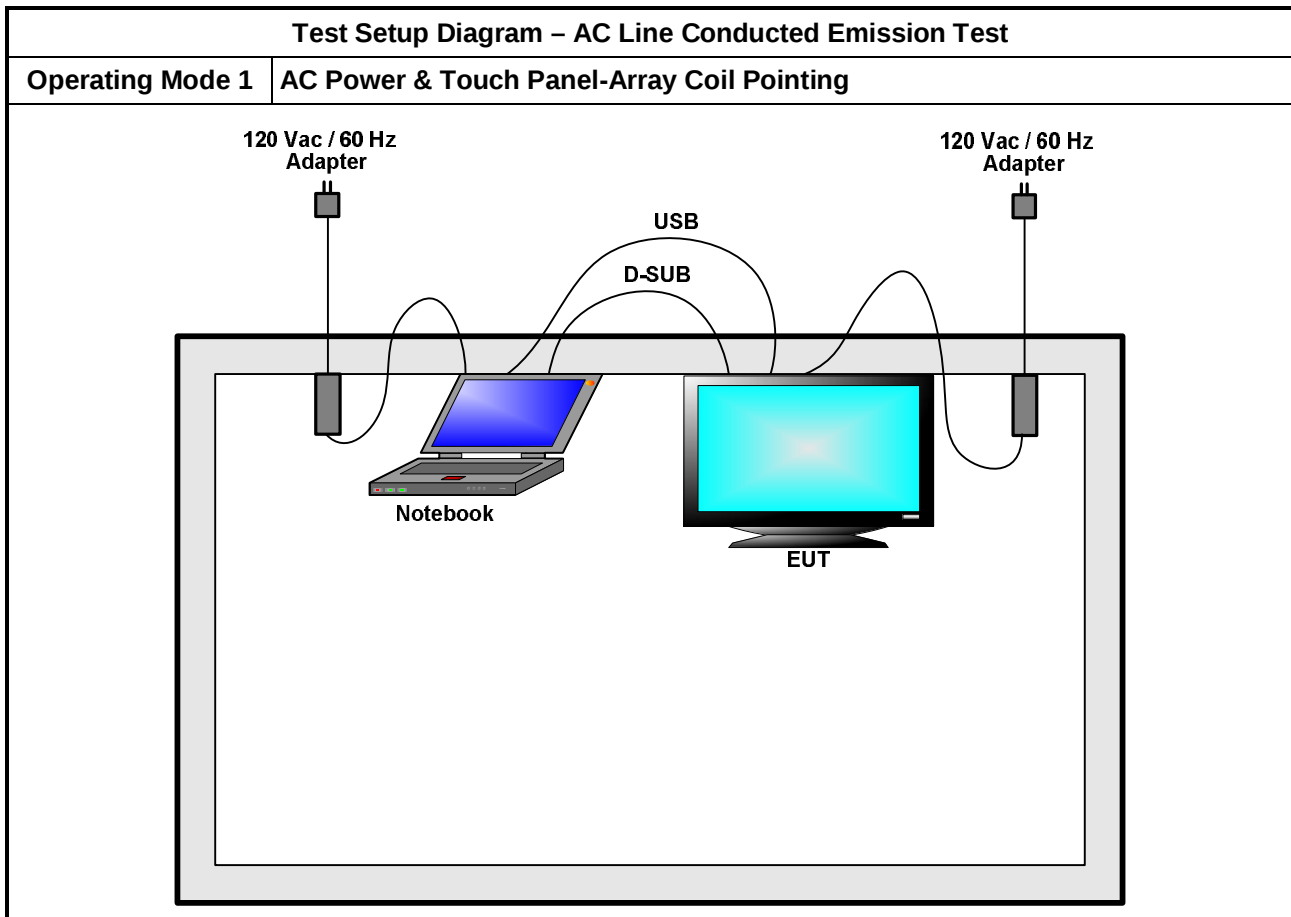

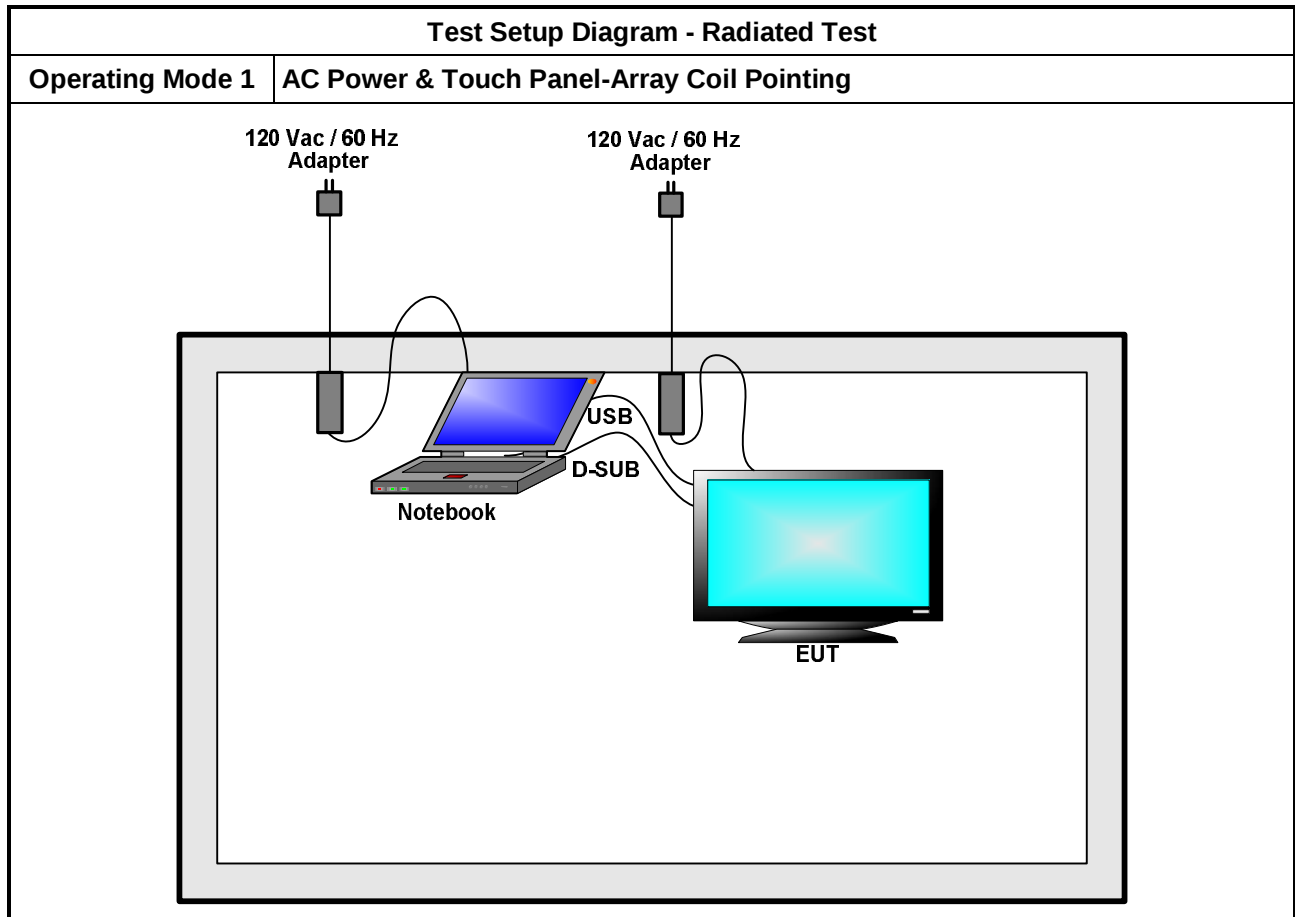

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method	
☒	Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.
☒	If AC conducted emissions fall in operating band, then following below test method confirm final result.
☐	Accept measurements done with a suitable dummy load replacing the antenna under the following conditions: (1) Perform the AC line conducted tests with the antenna connected to determine compliance with FCC 15.207 limits outside the transmitter's fundamental emission band; (2) Retest with a dummy load to determine compliance with FCC 15.207 limits within the transmitter's fundamental emission band.
☒	For a device with a permanent antenna operating at or below 30 MHz, accept measurements done with a suitable dummy load, in lieu of the permanent antenna under the following conditions: (1) Perform the AC line conducted tests with the permanent antenna to determine compliance with the FCC 15.207 limits outside the transmitter's fundamental emission band; (2) Retest with a dummy load in lieu of the permanent antenna to determine compliance with the FCC 15.207 limits within the transmitter's fundamental emission band.

3.1.4 Test Setup

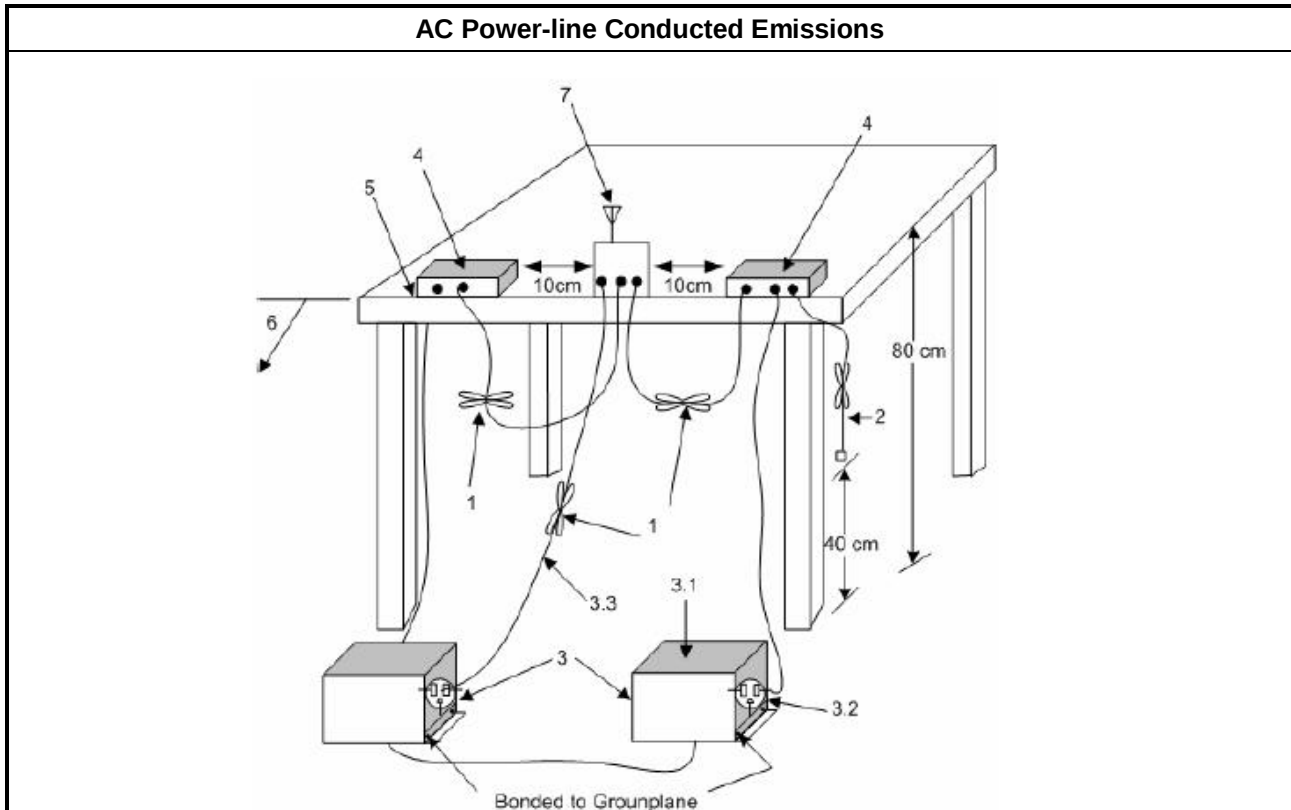


3.1.5 Test Result of AC Power-line Conducted Emissions

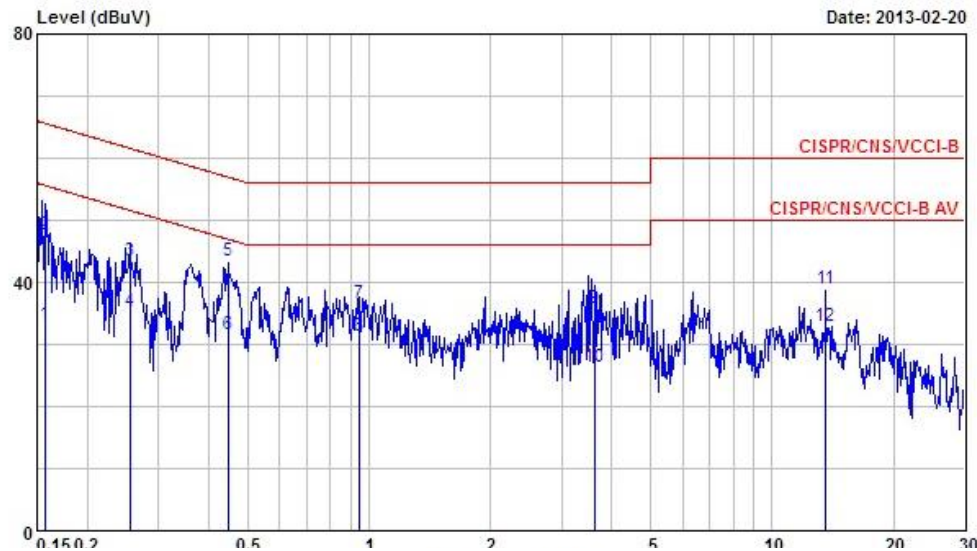AC Power-line Conducted Emissions Result																																																																																																																																	
Operating Mode	1	Power Phase	Neutral																																																																																																																														
Operating Function	AC Power & Touch Panel-Array Coil Pointing																																																																																																																																
Level (dBuV) Date: 2013-02-20  <table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>Read Level</th><th>LISN Factor</th><th>Cable Loss</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV</th><th>dB</th><th>dBuV</th><th>dBuV</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>0.1573260</td><td>33.10</td><td>-22.50</td><td>55.60</td><td>32.99</td><td>0.11</td><td>0.00</td><td>Average</td></tr><tr><td>2</td><td>0.1573260</td><td>47.66</td><td>-17.94</td><td>65.60</td><td>47.55</td><td>0.11</td><td>0.00</td><td>QP</td></tr><tr><td>3</td><td>0.2547970</td><td>43.42</td><td>-18.18</td><td>61.60</td><td>43.31</td><td>0.11</td><td>0.00</td><td>QP</td></tr><tr><td>4</td><td>0.2547970</td><td>35.16</td><td>-16.44</td><td>51.60</td><td>35.05</td><td>0.11</td><td>0.00</td><td>Average</td></tr><tr><td>5</td><td>0.4479900</td><td>43.29</td><td>-13.62</td><td>56.91</td><td>43.18</td><td>0.10</td><td>0.01</td><td>QP</td></tr><tr><td>6</td><td>0.4479900</td><td>31.56</td><td>-15.35</td><td>46.91</td><td>31.45</td><td>0.10</td><td>0.01</td><td>Average</td></tr><tr><td>7</td><td>0.9430800</td><td>36.50</td><td>-19.50</td><td>56.00</td><td>36.30</td><td>0.11</td><td>0.09</td><td>QP</td></tr><tr><td>8</td><td>0.9430800</td><td>31.24</td><td>-14.76</td><td>46.00</td><td>31.04</td><td>0.11</td><td>0.09</td><td>Average</td></tr><tr><td>9</td><td>3.641</td><td>35.87</td><td>-20.13</td><td>56.00</td><td>35.71</td><td>0.15</td><td>0.01</td><td>QP</td></tr><tr><td>10</td><td>3.641</td><td>26.41</td><td>-19.59</td><td>46.00</td><td>26.25</td><td>0.15</td><td>0.01</td><td>Average</td></tr><tr><td>11</td><td>13.560</td><td>38.88</td><td>-21.12</td><td>60.00</td><td>38.54</td><td>0.27</td><td>0.07</td><td>QP</td></tr><tr><td>12</td><td>13.560</td><td>32.95</td><td>-17.05</td><td>50.00</td><td>32.61</td><td>0.27</td><td>0.07</td><td>Average</td></tr></table>					Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark		MHz	dBuV	dB	dBuV	dBuV	dB	dB		1	0.1573260	33.10	-22.50	55.60	32.99	0.11	0.00	Average	2	0.1573260	47.66	-17.94	65.60	47.55	0.11	0.00	QP	3	0.2547970	43.42	-18.18	61.60	43.31	0.11	0.00	QP	4	0.2547970	35.16	-16.44	51.60	35.05	0.11	0.00	Average	5	0.4479900	43.29	-13.62	56.91	43.18	0.10	0.01	QP	6	0.4479900	31.56	-15.35	46.91	31.45	0.10	0.01	Average	7	0.9430800	36.50	-19.50	56.00	36.30	0.11	0.09	QP	8	0.9430800	31.24	-14.76	46.00	31.04	0.11	0.09	Average	9	3.641	35.87	-20.13	56.00	35.71	0.15	0.01	QP	10	3.641	26.41	-19.59	46.00	26.25	0.15	0.01	Average	11	13.560	38.88	-21.12	60.00	38.54	0.27	0.07	QP	12	13.560	32.95	-17.05	50.00	32.61	0.27	0.07	Average
	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark																																																																																																																									
	MHz	dBuV	dB	dBuV	dBuV	dB	dB																																																																																																																										
1	0.1573260	33.10	-22.50	55.60	32.99	0.11	0.00	Average																																																																																																																									
2	0.1573260	47.66	-17.94	65.60	47.55	0.11	0.00	QP																																																																																																																									
3	0.2547970	43.42	-18.18	61.60	43.31	0.11	0.00	QP																																																																																																																									
4	0.2547970	35.16	-16.44	51.60	35.05	0.11	0.00	Average																																																																																																																									
5	0.4479900	43.29	-13.62	56.91	43.18	0.10	0.01	QP																																																																																																																									
6	0.4479900	31.56	-15.35	46.91	31.45	0.10	0.01	Average																																																																																																																									
7	0.9430800	36.50	-19.50	56.00	36.30	0.11	0.09	QP																																																																																																																									
8	0.9430800	31.24	-14.76	46.00	31.04	0.11	0.09	Average																																																																																																																									
9	3.641	35.87	-20.13	56.00	35.71	0.15	0.01	QP																																																																																																																									
10	3.641	26.41	-19.59	46.00	26.25	0.15	0.01	Average																																																																																																																									
11	13.560	38.88	-21.12	60.00	38.54	0.27	0.07	QP																																																																																																																									
12	13.560	32.95	-17.05	50.00	32.61	0.27	0.07	Average																																																																																																																									
Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found emissions (No emissions were detected.) Note 3: When emissions are in operating band over limits, retest with a dummy load for final in-band results.																																																																																																																																	

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	AC Power & Touch Panel-Array Coil Pointing		

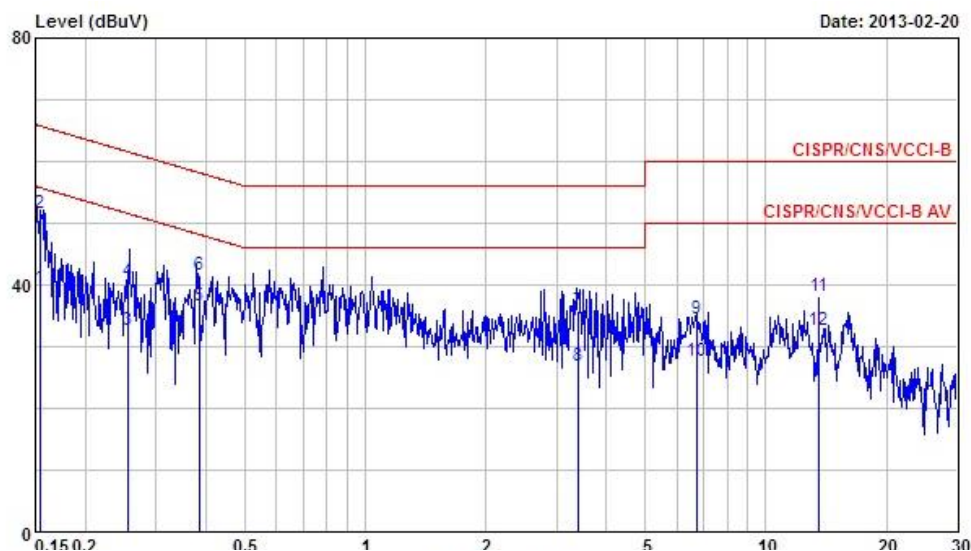

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.1540270	39.55	-16.23	55.78	39.31	0.24	0.00	Average
2	0.1540270	51.71	-14.07	65.78	51.47	0.24	0.00	QP
3	0.2547110	32.74	-18.86	51.60	32.51	0.23	0.00	Average
4	0.2547110	40.54	-21.06	61.60	40.31	0.23	0.00	QP
5	0.3847160	36.50	-11.68	48.18	36.28	0.22	0.00	Average
6	0.3847160	41.52	-16.66	58.18	41.30	0.22	0.00	QP
7	3.385	35.69	-20.31	56.00	35.39	0.28	0.02	QP
8	3.385	26.86	-19.14	46.00	26.56	0.28	0.02	Average
9	6.702	34.56	-25.44	60.00	34.20	0.36	0.00	QP
10	6.702	27.57	-22.43	50.00	27.21	0.36	0.00	Average
11	13.560	38.24	-21.76	60.00	37.69	0.48	0.07	QP
12	13.560	32.50	-17.50	50.00	31.95	0.48	0.07	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

Note 3: When emissions are in operating band over limits, retest with a dummy load for final in-band results.

3.2 Transmitter Radiated Emissions

3.2.1 Transmitter Radiated Emissions Limit

Transmitter Radiated Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: the frequency bands 9-90 kHz, 110-490 kHz measurements employing an average detector and other below 1GHz measurements employing a CISPR quasi-peak detector.


3.2.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
☒	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
☒	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz. The frequency bands 9-90 kHz, 110-490 kHz measurements employing an average detector and other below 30MHz measurements employing a CISPR quasi-peak detector.
☒	At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the requirements; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be following below methods.
☐	The results shall be extrapolated to the specified distance by making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.
☒	The results shall be by using the square of an inverse linear distance extrapolation factor (40 dB/decade).
☒	For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.
☒	The any unwanted emissions level shall not exceed the fundamental emission level.


3.2.4 Test Setup

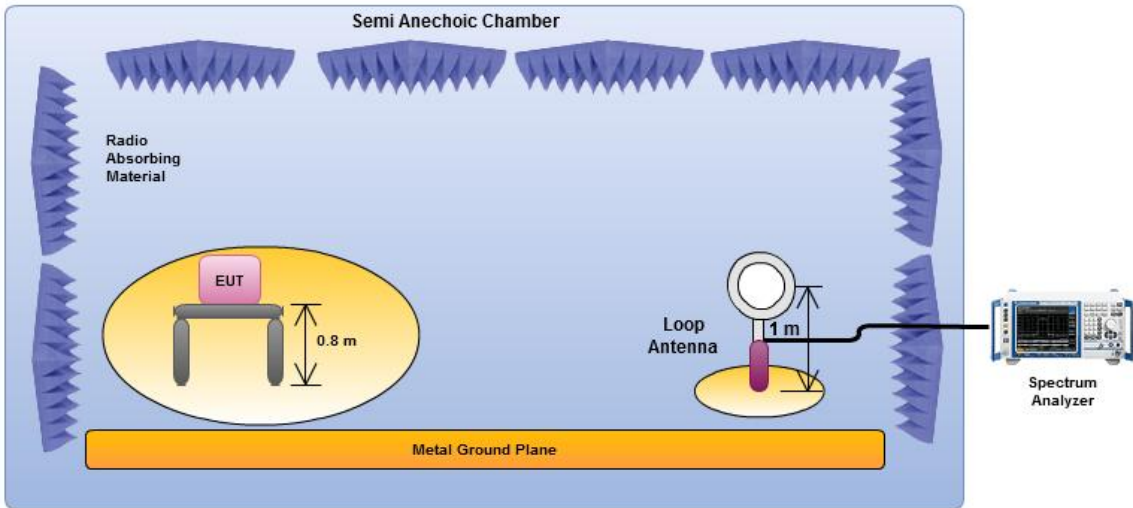Transmitter Radiated Emissions
 The diagram illustrates the test setup for transmitter radiated emissions. It is conducted within a Semi Anechoic Chamber, which is lined with Radio Absorbing Material (represented by blue pyramidal shapes). The EUT (Equipment Under Test) is placed on a Metal Ground Plane (orange bar) at a height of 0.8 m. A Loop Antenna is positioned to the right of the EUT, with its center at a height of 1 m above the ground plane. The antenna is connected to a Spectrum Analyzer, which is shown displaying a signal on its screen.
Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. The center of the loop shall be 1 m above the ground. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna. the antenna height shall be varied from 1 m to 4 m.

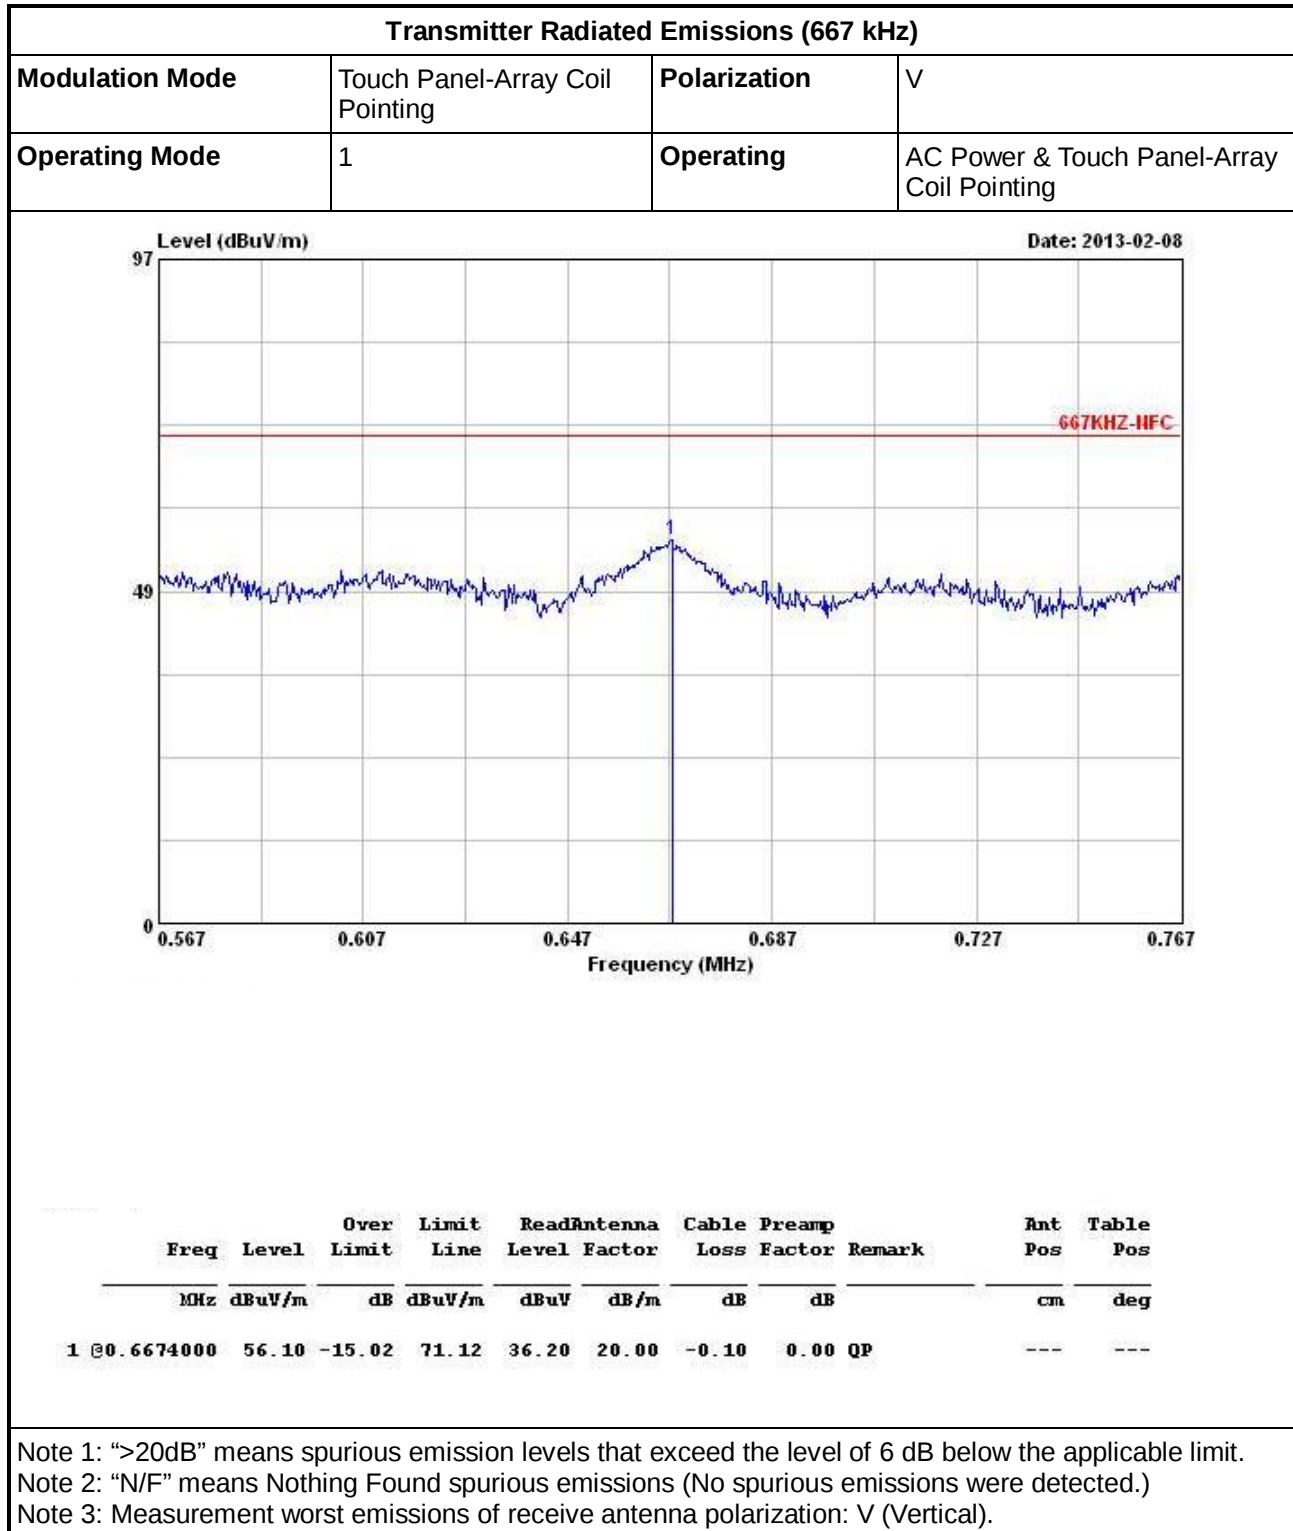3.2.5 Transmitter Radiated Emissions (Below 30MHz)


Transmitter Radiated Emissions (9 kHz – 150 kHz)

Modulation Mode	Touch Panel-Array Coil Pointing	Polarization	H
Operating Mode	1	Operating	AC Power & Touch Panel-Array Coil Pointing

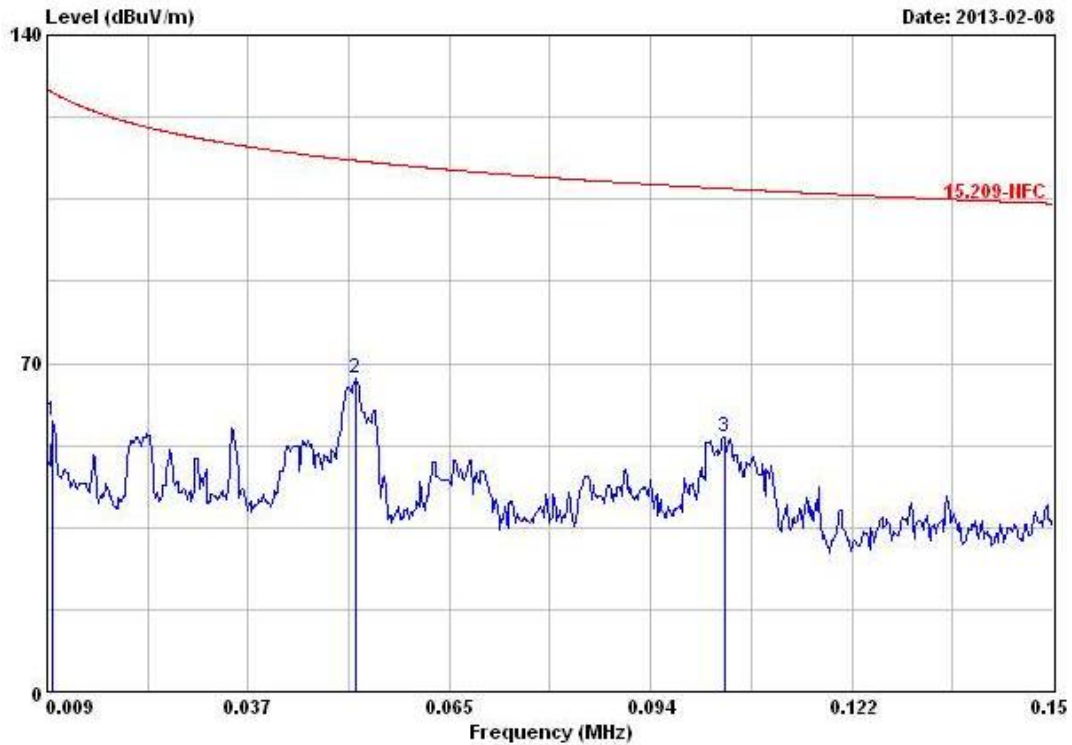

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	0.0098460	57.64	-70.10	127.74	37.62	20.00	0.02	0.00	QP	---	---
2	0.0521460	66.86	-46.40	113.26	46.85	20.00	0.01	0.00	QP	---	---
3	0.1040340	54.38	-52.88	107.26	34.40	20.00	-0.02	0.00	QP	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement worst emissions of receive antenna polarization: V (Vertical).

Note 4: Except fundamental emission, other emissions from digital circuitry used to control additional panel functions or display capabilities other than the touch panel radio transmission. While disable touch panel radio transmission, other emissions have the same levels. Therefore other emissions level could be exceed the fundamental emission level.

Transmitter Radiated Emissions (150 kHz – 30 MHz)

Modulation Mode	Touch Panel-Array Coil Pointing	Polarization	H
Operating Mode	1	Operating	AC Power & Touch Panel-Array Coil Pointing

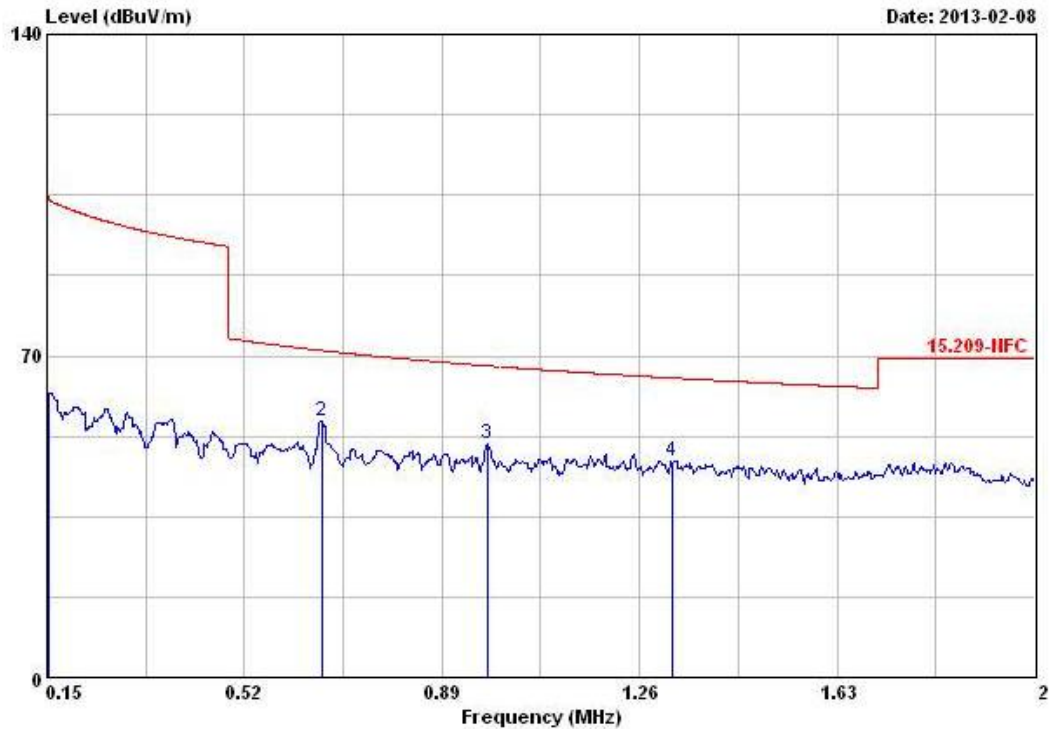


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	0.1537000	61.82	-42.06	103.88	41.85	20.00	-0.03	0.00	QP	---	---
2	0.6643000	55.75	-15.41	71.16	35.85	20.00	-0.10	0.00	QP	---	---
3	0.9751000	50.95	-16.88	67.83	31.08	20.00	-0.13	0.00	QP	---	---
4	1.320	46.96	-18.24	65.20	27.11	20.00	-0.15	0.00	QP	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement worst emissions of receive antenna polarization: V (Vertical).

Note 4: Except fundamental emission, other emissions from digital circuitry used to control additional panel functions or display capabilities other than the touch panel radio transmission. While disable touch panel radio transmission, other emissions have the same levels. Therefore other emissions level could be exceed the fundamental emission level.

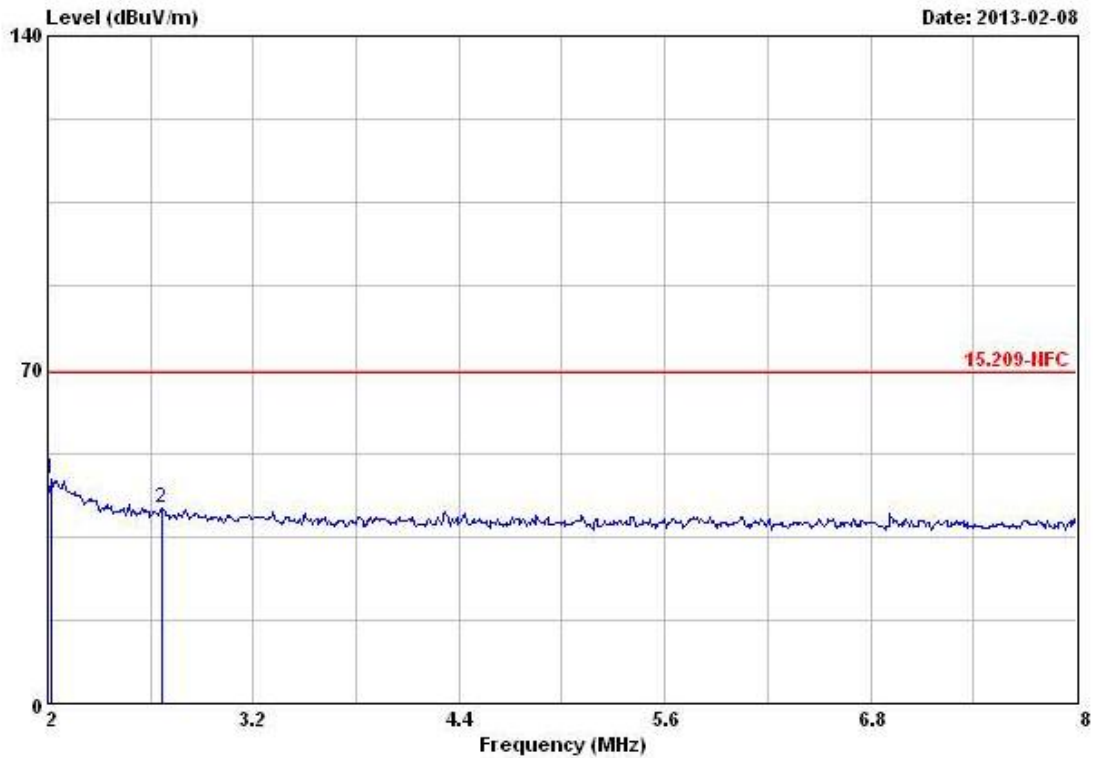


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	2.020	47.17	-22.37	69.54	27.35	20.00	-0.18	0.00	QP	---	---
2	2.670	41.10	-28.44	69.54	21.31	20.00	-0.21	0.00	QP	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement worst emissions of receive antenna polarization: V (Vertical).

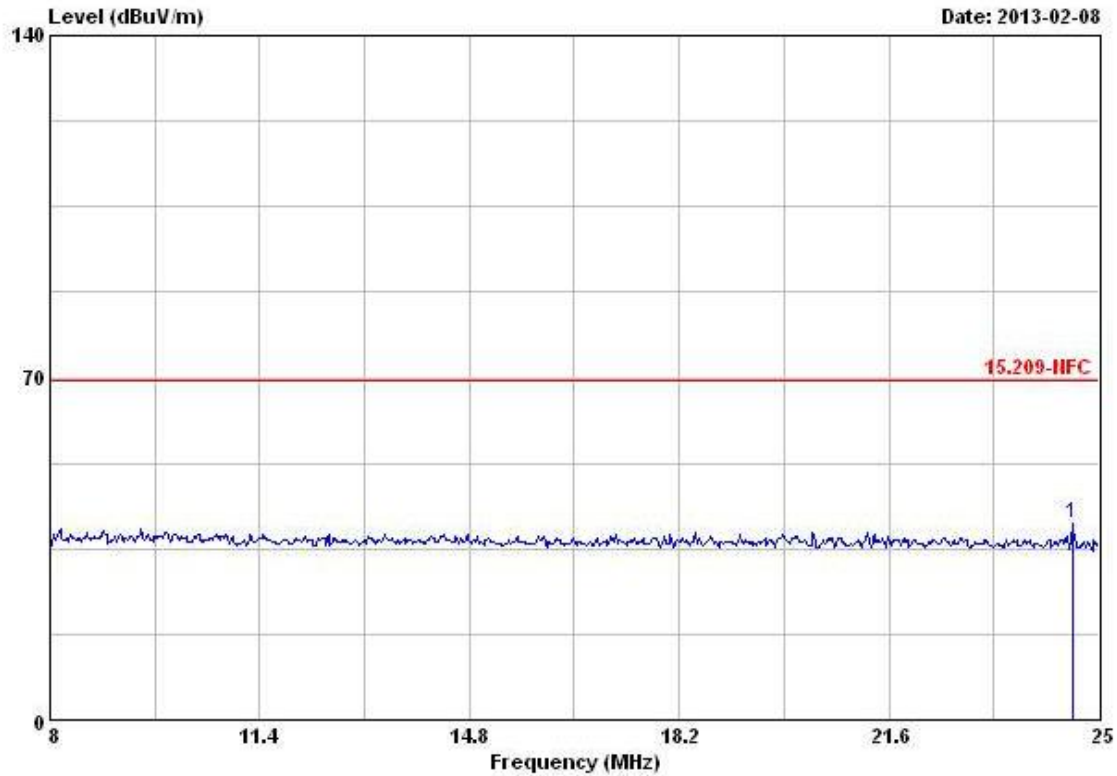

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	24.580	40.10	-29.44	69.54	20.87	20.00	-0.77	0.00	QP	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement worst emissions of receive antenna polarization: V (Vertical).

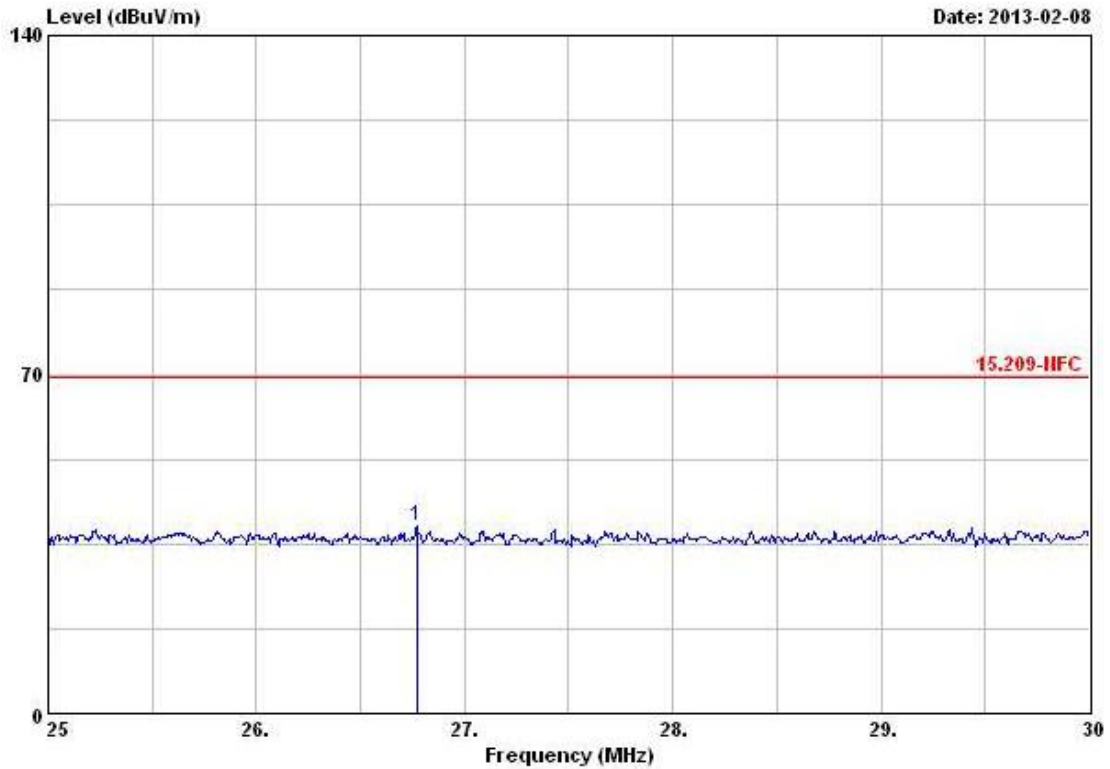


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	26.770	38.74	-30.80	69.54	19.54	20.00	-0.80	0.00	QP	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement worst emissions of receive antenna polarization: V (Vertical).

3.2.6 Transmitter Radiated Emissions (Above 30MHz)

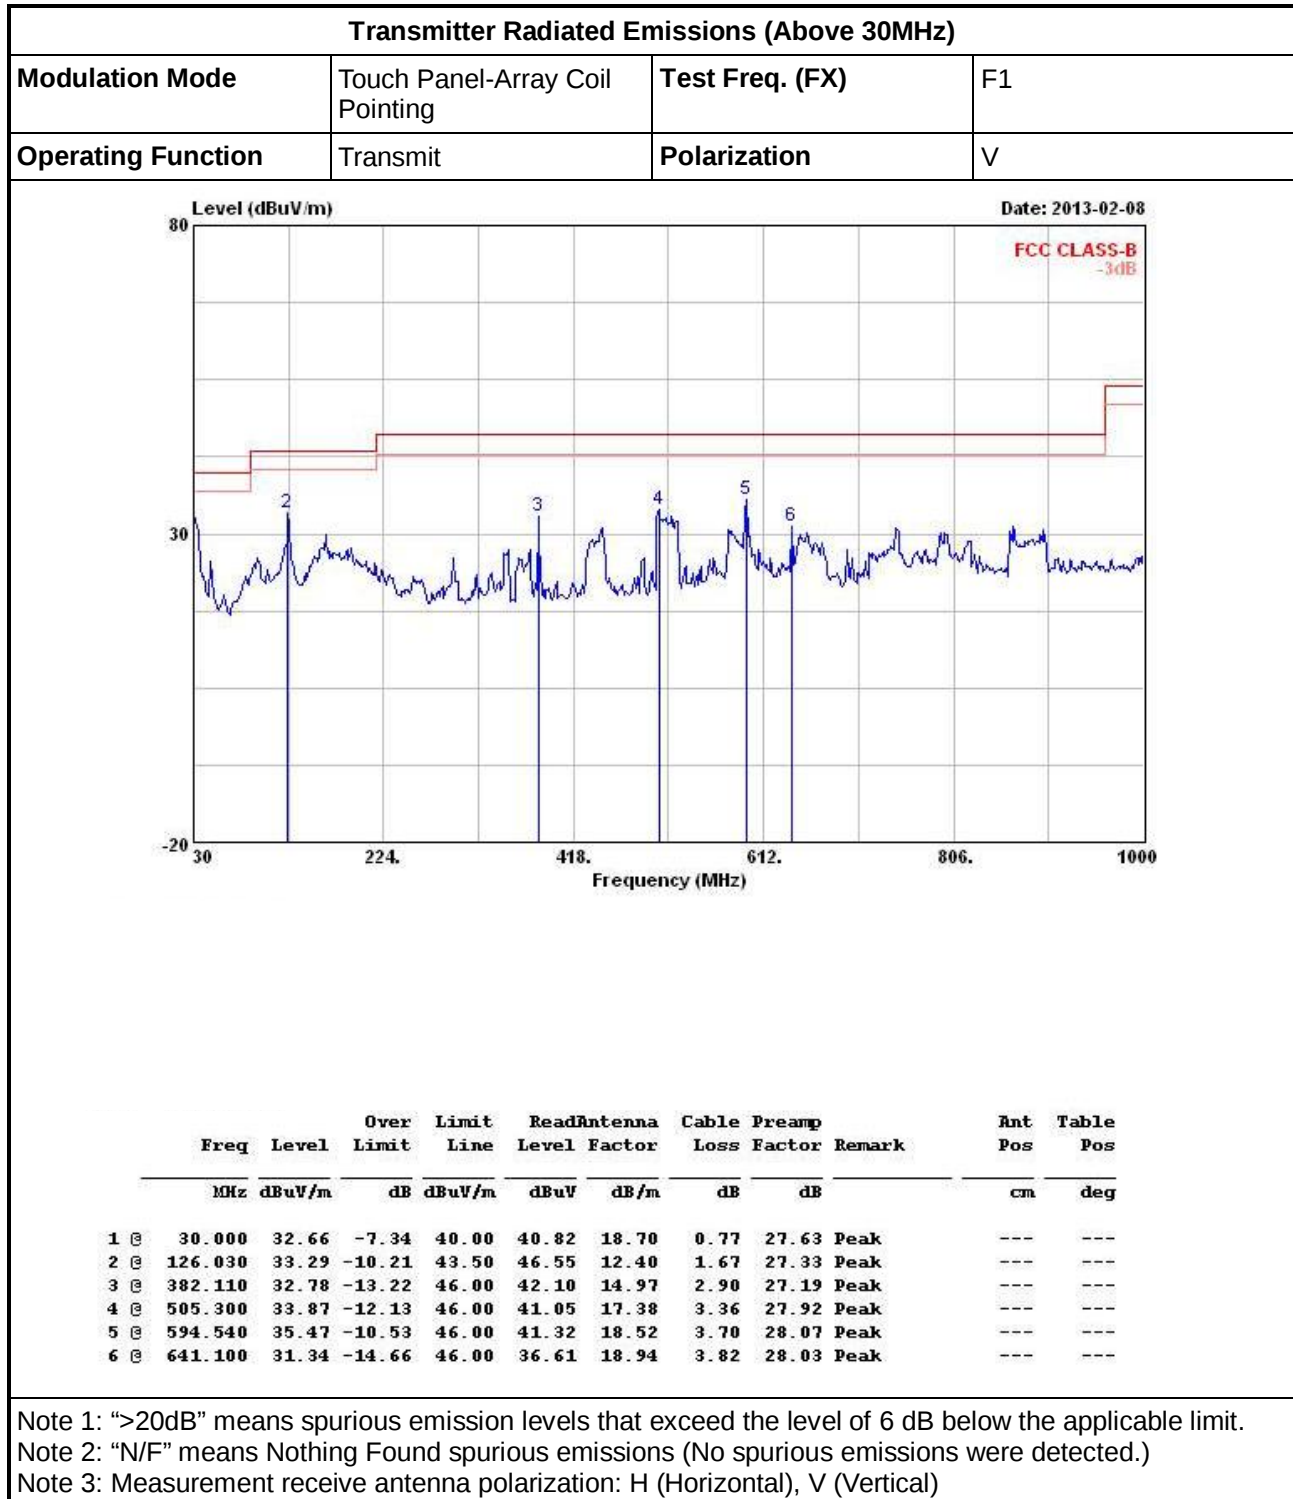

Transmitter Radiated Emissions (Above 30MHz)

Modulation Mode	Touch Panel-Array Coil Pointing	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	H

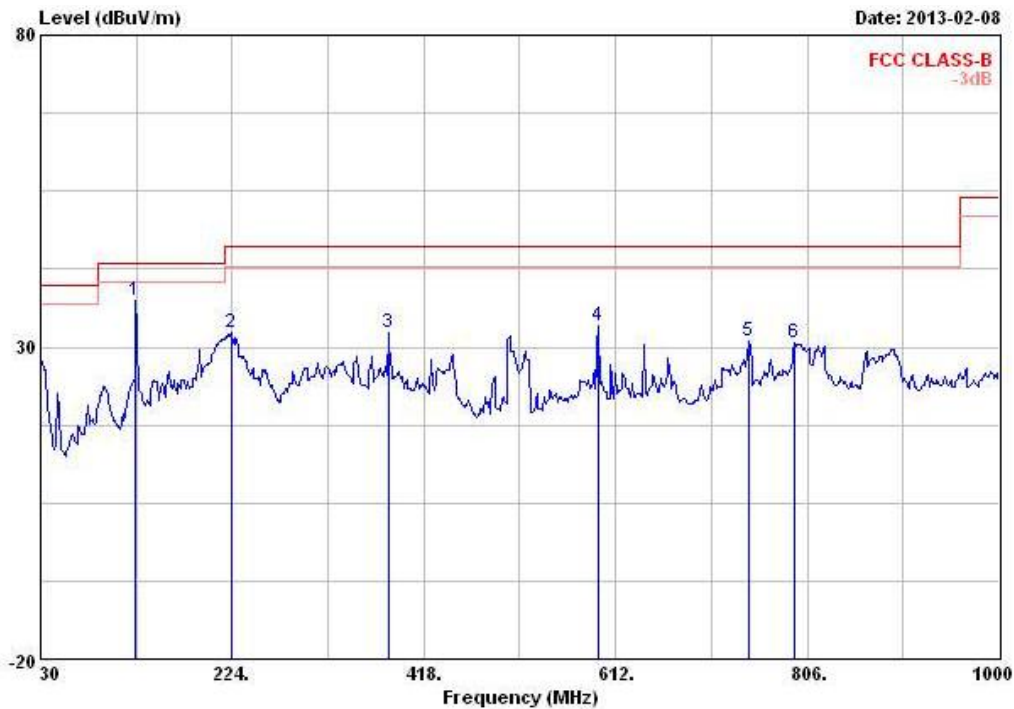

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	126.030	37.58	-5.92	43.50	50.84	12.40	1.67	27.33	Peak	---	---
2 @	223.030	32.27	-13.73	46.00	47.41	9.57	2.19	26.90	Peak	---	---
3 @	382.110	32.34	-13.66	46.00	41.66	14.97	2.90	27.19	Peak	---	---
4 @	594.540	33.32	-12.68	46.00	39.17	18.52	3.70	28.07	Peak	---	---
5 @	746.830	30.98	-15.02	46.00	34.89	19.80	4.16	27.87	Peak	---	---
6	792.420	30.67	-15.33	46.00	34.30	19.86	4.29	27.78	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Nov. 22, 2012	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2013	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz ~ 30MHz	Apr. 20, 2012	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	CB049	9kHz ~ 30MHz	Apr. 25, 2012	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Dec. 01, 2012	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May. 10, 2012	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100793	9kHz ~ 30GHz	Sep. 26, 2012	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 22, 2012	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz ~ 1GHz	Jan. 17, 2013	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9kHz ~ 30MHz	Jul. 03, 2012	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year.