

# FCC Test Report

|              |                       |
|--------------|-----------------------|
| Product Name | 802.11 ac PCIe Module |
| Model No     | NGP1058               |
| FCC ID.      | HZB-NGP1058           |

|           |                                                                            |
|-----------|----------------------------------------------------------------------------|
| Applicant | Proxim Wireless Corporation                                                |
| Address   | 47633 Westinghouse Drive, Fremont City, California,<br>United States 94539 |

|                 |                     |
|-----------------|---------------------|
| Date of Receipt | Apr. 27, 2015       |
| Issue Date      | May 21, 2015        |
| Report No.      | 1550017R-RFUSP69V00 |
| Report Version  | V1.0                |



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of Quietek Corporation.

# Test Report

Issue Date: May 21, 2015

Report No.: 1550017R-RFUSP69V00



|                     |                                                                                             |
|---------------------|---------------------------------------------------------------------------------------------|
| Product Name        | 802.11 ac PCIe Module                                                                       |
| Applicant           | Proxim Wireless Corporation                                                                 |
| Address             | 47633 Westinghouse Drive, Fremont City, California, United States 94539                     |
| Manufacturer        | Compex Systems Pte Ltd                                                                      |
| Model No.           | NGP1058                                                                                     |
| EUT Rated Voltage   | DC 5V, 1.5A                                                                                 |
| EUT Test Voltage    | AC 120V/60Hz                                                                                |
| Trade Name          | Proxim                                                                                      |
| Applicable Standard | FCC CFR Title 47 Part 15 Subpart C: 2013<br>ANSI C63.4: 2009, ANSI C63.10: 2009, KDB 558074 |
| Test Result         | Complied                                                                                    |

Documented By : Anita Chou  
( Senior Engineering Adm. Specialist /  
Anita Chou)

Tested By : Benjamin Pan  
( Engineer / Benjamin Pan)

Approved By : Vincent Lin  
( Director / Vincent Lin)

## TABLE OF CONTENTS

| Description                                         | Page       |
|-----------------------------------------------------|------------|
| <b>1. GENERAL INFORMATION .....</b>                 | <b>5</b>   |
| 1.1. EUT Description .....                          | 5          |
| 1.2. Operational Description .....                  | 8          |
| 1.3. Tested System Details .....                    | 9          |
| 1.4. Configuration of Tested System.....            | 9          |
| 1.5. EUT Exercise Software.....                     | 9          |
| 1.6. Test Facility.....                             | 10         |
| <b>2. Conducted Emission .....</b>                  | <b>11</b>  |
| 2.1. Test Equipment .....                           | 11         |
| 2.2. Test Setup.....                                | 11         |
| 2.3. Limits .....                                   | 12         |
| 2.4. Test Procedure.....                            | 12         |
| 2.5. Uncertainty.....                               | 12         |
| 2.6. Test Result of Conducted Emission .....        | 13         |
| <b>3. Maximum Conducted Power .....</b>             | <b>23</b>  |
| 3.1. Test Equipment .....                           | 23         |
| 3.2. Test Setup.....                                | 23         |
| 3.3. Limits .....                                   | 23         |
| 3.4. Test Procedure.....                            | 23         |
| 3.5. Uncertainty.....                               | 23         |
| 3.6. Test Result of Maximum Conducted Power .....   | 24         |
| <b>4. Radiated Emission .....</b>                   | <b>49</b>  |
| 4.1. Test Equipment .....                           | 49         |
| 4.2. Test Setup.....                                | 50         |
| 4.3. Limits .....                                   | 51         |
| 4.4. Test Procedure.....                            | 52         |
| 4.5. Uncertainty.....                               | 52         |
| 4.6. Test Result of Radiated Emission .....         | 53         |
| <b>5. RF Antenna conducted test .....</b>           | <b>118</b> |
| 5.1. Test Equipment .....                           | 118        |
| 5.2. Test Setup.....                                | 118        |
| 5.3. Limits .....                                   | 118        |
| 5.4. Test Procedure.....                            | 119        |
| 5.5. Uncertainty.....                               | 119        |
| 5.6. Test Result of RF antenna conducted test ..... | 120        |
| <b>6. Band Edge .....</b>                           | <b>210</b> |

|           |                                                             |            |
|-----------|-------------------------------------------------------------|------------|
| 6.1.      | Test Equipment .....                                        | 210        |
| 6.2.      | Test Setup.....                                             | 211        |
| 6.3.      | Limits .....                                                | 211        |
| 6.4.      | Test Procedure.....                                         | 212        |
| 6.5.      | Uncertainty.....                                            | 212        |
| 6.6.      | Test Result of Band Edge.....                               | 213        |
| <b>7.</b> | <b>Occupied Bandwidth .....</b>                             | <b>283</b> |
| 7.1.      | Test Equipment .....                                        | 283        |
| 7.2.      | Test Setup.....                                             | 283        |
| 7.3.      | Limits .....                                                | 283        |
| 7.4.      | Test Procedure.....                                         | 283        |
| 7.5.      | Uncertainty.....                                            | 283        |
| 7.6.      | Test Result of Occupied Bandwidth .....                     | 284        |
| <b>8.</b> | <b>Power Density .....</b>                                  | <b>329</b> |
| 8.1.      | Test Equipment .....                                        | 329        |
| 8.2.      | Test Setup.....                                             | 329        |
| 8.3.      | Limits .....                                                | 329        |
| 8.4.      | Test Procedure.....                                         | 329        |
| 8.5.      | Uncertainty.....                                            | 329        |
| 8.6.      | Test Result of Power Density.....                           | 330        |
| <b>9.</b> | <b>EMI Reduction Method During Compliance Testing .....</b> | <b>375</b> |

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

## 1. GENERAL INFORMATION

### 1.1. EUT Description

|                    |                                                                                     |
|--------------------|-------------------------------------------------------------------------------------|
| Product Name       | 802.11 ac PCIe Module                                                               |
| Trade Name         | Proxim                                                                              |
| Model No.          | NGP1058                                                                             |
| FCC ID.            | HZB-NGP1058                                                                         |
| Frequency Range    | 802.11a/n-20MHz:5745-5825MHz ,802.11n-40MHz:5755-5795MHz<br>802.11ac-80MHz: 5780MHz |
| Number of Channels | 802.11a/n-20MHz: 5, n-40MHz: 2<br>802.11ac-80MHz: 1                                 |
| Data Speed         | 802.11a: 6-54Mbps, 802.11n: up to 300Mbps, 802.11ac: up to 866.7Mbps                |
| Channel separation | 802.11a/n-20MHz: 20MHz, 802.11n-40MHz: 40MHz, 802.11ac-80MHz: 80MHz                 |
| Type of Modulation | 802.11a/n: OFDM, BPSK, QPSK, 16QAM, 64QAM, 256AM                                    |
| Antenna Type       | Dipole / Grid DISH / Omni / Panel / Sector                                          |
| Antenna Gain       | Refer to the table "Antenna List"                                                   |
| Channel Control    | Auto                                                                                |
| Contain Module     | Atheros / QCA9882                                                                   |

#### Antenna List

| No. | Manufacturer | Part No.     | Antenna Type                 | Peak Gain                  |
|-----|--------------|--------------|------------------------------|----------------------------|
| 1.  | Mars         | MA-WA55-30   | External Antenna (Panel)     | 30dBi for 5.725~5.850GHz   |
| 2.  | Mars         | MA-WB55-20   | External Antenna (Sector)    | 20dBi for 5.725~5.850GHz   |
| 3   | Andrew       | PX3F-52-N7A  | External Antenna (Grid DISH) | 33.5dBi for 5.725~5.850GHz |
| 4   | Smartant     | SAA08-220570 | External Antenna (Omni)      | 10dBi for 5.725~5.850GHz   |
| 5   | Proxim       | N/A          | External Antenna (Dipole)    | 5dBi for 5.725~5.850GHz    |

Note: The antenna of EUT is conform to FCC 15.203

## 802.11a/n-20MHz Center Working Frequency of Each Channel:

| Channel      | Frequency | Channel      | Frequency | Channel      | Frequency | Channel      | Frequency |
|--------------|-----------|--------------|-----------|--------------|-----------|--------------|-----------|
| Channel 149: | 5745 MHz  | Channel 153: | 5765 MHz  | Channel 157: | 5785 MHz  | Channel 161: | 5805 MHz  |
| Channel 165: | 5825 MHz  |              |           |              |           |              |           |

## 802.11n-40MHz (5G Band) Center Working Frequency of Each Channel:

| Channel      | Frequency | Channel      | Frequency |
|--------------|-----------|--------------|-----------|
| Channel 151: | 5755 MHz  | Channel 159: | 5795 MHz  |

## 802.11ac-80MHz Center Working Frequency of Each Channel:

| Channel    | Frequency |
|------------|-----------|
| Channel 1: | 5780 MHz  |

## Note:

1. This device is a 802.11 ac PCIe Module with a built-in 5GHz WLAN transceiver.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report. (802.11b is 1Mbps 、802.11a/g is 6Mbps 、802.11n(20M-BW) is 14.4Mbps 、802.11n(40M-BW) is 30Mbps and 802.11ac(80M-BW) is 65 Mbps).
4. These tests are conducted on a sample for the purpose of demonstrating compliance of 802.11a/b/g/n/ac transmitter with Part 15 Subpart C Paragraph 15.247 of spread spectrum devices.

|            |                                                                      |
|------------|----------------------------------------------------------------------|
| Test Mode: | Mode 1: Transmit - 802.11a_6Mbps(Dipole Antenna)                     |
|            | Mode 2: Transmit - 802.11n-20BW_14.4Mbps(5G Band)(Dipole Antenna)    |
|            | Mode 3: Transmit - 802.11n-40BW_30Mbps(5G Band)(Dipole Antenna)      |
|            | Mode 4: Transmit - 802.11ac-80BW_65Mbps(5G Band)(Dipole Antenna)     |
|            | Mode 5: Transmit - 802.11a_6Mbps(Grid DISH Antenna)                  |
|            | Mode 6: Transmit - 802.11n-20BW_14.4Mbps(5G Band)(Grid DISH Antenna) |
|            | Mode 7: Transmit - 802.11n-40BW_30Mbps(5G Band)(Grid DISH Antenna)   |
|            | Mode 8: Transmit - 802.11ac-80BW_65Mbps(5G Band)(Grid DISH Antenna)  |
|            | Mode 9: Transmit - 802.11a_6Mbps(Omni Antenna)                       |
|            | Mode 10: Transmit - 802.11n-20BW_14.4Mbps(5G Band)(Omni Antenna)     |
|            | Mode 11: Transmit - 802.11n-40BW_30Mbps(5G Band)(Omni Antenna)       |
|            | Mode 12: Transmit - 802.11ac-80BW_65Mbps(5G Band)(Omni Antenna)      |
|            | Mode 13: Transmit - 802.11a_6Mbps(Panel Antenna)                     |
|            | Mode 14: Transmit - 802.11n-20BW_14.4Mbps(5G Band)(Panel Antenna)    |
|            | Mode 15: Transmit - 802.11n-40BW_30Mbps(5G Band)(Panel Antenna)      |
|            | Mode 16: Transmit - 802.11ac-80BW_65Mbps(5G Band)(Panel Antenna)     |
|            | Mode 17: Transmit - 802.11a_6Mbps(Sector Antenna)                    |
|            | Mode 18: Transmit - 802.11n-20BW_14.4Mbps(5G Band)(Sector Antenna)   |
|            | Mode 19: Transmit - 802.11n-40BW_30Mbps(5G Band)(Sector Antenna)     |
|            | Mode 20: Transmit - 802.11ac-80BW_65Mbps(5G Band)(Sector Antenna)    |


### 1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

| Product             | Manufacturer | Model No. | Serial No.  | Power Cord         |
|---------------------|--------------|-----------|-------------|--------------------|
| (1) Notebook PC     | DELL         | PP18L     | 36119001664 | Non-Shielded, 0.8m |
| (2) Fixture         | Proxin       | N/A       | N/A         | N/A                |
| (3) DC Power Supply | Gwinstek     | SPD-3606  | N/A         | N/A                |

| Signal Cable Type | Signal cable Description |
|-------------------|--------------------------|
| A DC Power Cable  | Non-Shielded, 1.8m       |

### 1.4. Configuration of Tested System

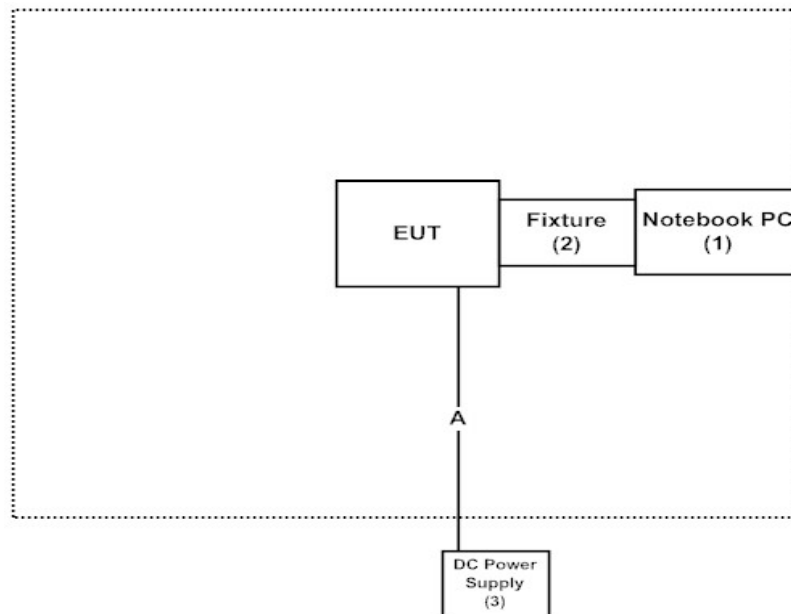

### 1.5. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.4.
- (2) Execute “Art2-GUI V2.3” program on the Notebook PC.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Start the continuous transmission.
- (5) Verify that the EUT works properly.

## 1.6. Test Facility

Ambient conditions in the laboratory:

| Items                      | Required (IEC 68-1) | Actual   |
|----------------------------|---------------------|----------|
| Temperature (°C)           | 15-35               | 20-35    |
| Humidity (%RH)             | 25-75               | 50-65    |
| Barometric pressure (mbar) | 860-1060            | 950-1000 |

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site : <http://www.quietek.com/chinese/about/certificates.aspx?bval=5>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

Site Description: File on  
Federal Communications Commission  
FCC Engineering Laboratory  
7435 Oakland Mills Road  
Columbia, MD 21046  
Registration Number: 92195

Site Name: Quietek Corporation  
Site Address: No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451,  
Taiwan, R.O.C.  
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789  
E-Mail : [service@quietek.com](mailto:service@quietek.com)

FCC Accreditation Number: TW1014

## 2. Conducted Emission


### 2.1. Test Equipment

|   | Equipment                | Manufacturer | Model No. / Serial No. | Last Cal.  | Remark      |
|---|--------------------------|--------------|------------------------|------------|-------------|
| X | Test Receiver            | R & S        | ESCS 30 / 825442/018   | Sep., 2014 |             |
| X | Artificial Mains Network | R & S        | ENV4200 / 848411/10    | Feb., 2015 | Peripherals |
| X | LISN                     | R & S        | ESH3-Z5 / 825562/002   | Feb., 2015 | EUT         |
|   | DC LISN                  | Schwarzbeck  | 8226 / 176             | Mar, 2015  | EUT         |
| X | Pulse Limiter            | R & S        | ESH3-Z2 / 357.8810.52  | Feb., 2015 |             |
|   | No.1 Shielded Room       |              |                        |            |             |

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

### 2.2. Test Setup

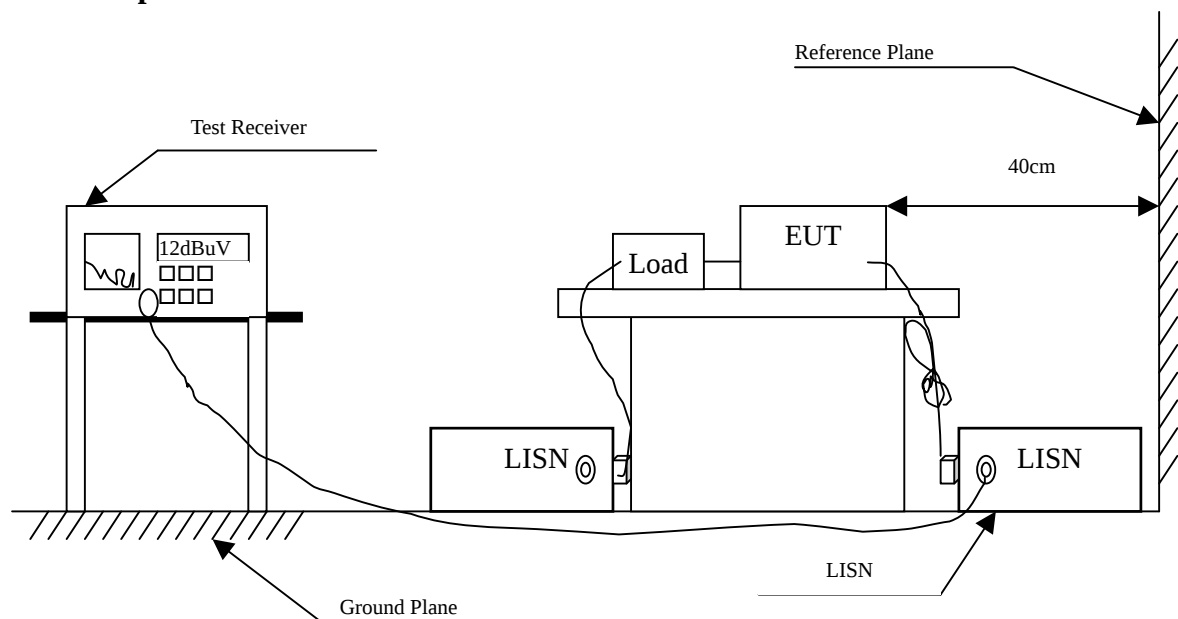

## 2.3. Limits

| FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit |        |       |
|-----------------------------------------------------|--------|-------|
| Frequency<br>MHz                                    | Limits |       |
|                                                     | QP     | AVG   |
| 0.15 - 0.50                                         | 66-56  | 56-46 |
| 0.50-5.0                                            | 56     | 46    |
| 5.0 - 30                                            | 60     | 50    |

## 2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

## 2.5. Uncertainty

$\pm 2.26$  dB

## 2.6. Test Result of Conducted Emission

Product : 802.11 ac PCie Module  
 Test Item : Conducted Emission Test  
 Power Line : Line 1  
 Test Mode : Mode 4: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Dipole Antenna)  
 (5780MHz)

| Frequency<br>MHz  | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV | Margin<br>dB | Limit<br>dBuV |
|-------------------|-------------------------|--------------------------|------------------------------|--------------|---------------|
| <b>Line 1</b>     |                         |                          |                              |              |               |
| <b>Quasi-Peak</b> |                         |                          |                              |              |               |
| 0.154             | 9.790                   | 49.100                   | 58.890                       | -6.996       | 65.886        |
| 0.177             | 9.790                   | 46.250                   | 56.040                       | -9.189       | 65.229        |
| 0.252             | 9.790                   | 36.310                   | 46.100                       | -16.986      | 63.086        |
| 0.267             | 9.790                   | 33.440                   | 43.230                       | -19.427      | 62.657        |
| 0.326             | 9.790                   | 26.930                   | 36.720                       | -24.251      | 60.971        |
| 0.701             | 9.790                   | 28.190                   | 37.980                       | -18.020      | 56.000        |
| <b>Average</b>    |                         |                          |                              |              |               |
| 0.154             | 9.790                   | 33.130                   | 42.920                       | -12.966      | 55.886        |
| 0.177             | 9.790                   | 33.050                   | 42.840                       | -12.389      | 55.229        |
| 0.252             | 9.790                   | 23.950                   | 33.740                       | -19.346      | 53.086        |
| 0.267             | 9.790                   | 21.650                   | 31.440                       | -21.217      | 52.657        |
| 0.326             | 9.790                   | 12.540                   | 22.330                       | -28.641      | 50.971        |
| 0.701             | 9.790                   | 16.420                   | 26.210                       | -19.790      | 46.000        |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : 802.11 ac PCIe Module  
Test Item : Conducted Emission Test  
Power Line : Line 2  
Test Mode : Mode 4: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Dipole Antenna)  
(5780MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV        | dB      | dBuV   |
| <b>Line 2</b>     |         |         |             |         |        |
| <b>Quasi-Peak</b> |         |         |             |         |        |
| 0.162             | 9.770   | 49.320  | 59.090      | -6.567  | 65.657 |
| 0.205             | 9.770   | 42.790  | 52.560      | -11.869 | 64.429 |
| 0.248             | 9.770   | 37.180  | 46.950      | -16.250 | 63.200 |
| 0.283             | 9.770   | 32.170  | 41.940      | -20.260 | 62.200 |
| 0.341             | 9.770   | 24.580  | 34.350      | -26.193 | 60.543 |
| 0.673             | 9.770   | 27.400  | 37.170      | -18.830 | 56.000 |
| <b>Average</b>    |         |         |             |         |        |
| 0.162             | 9.770   | 37.310  | 47.080      | -8.577  | 55.657 |
| 0.205             | 9.770   | 30.160  | 39.930      | -14.499 | 54.429 |
| 0.248             | 9.770   | 24.930  | 34.700      | -18.500 | 53.200 |
| 0.283             | 9.770   | 19.260  | 29.030      | -23.170 | 52.200 |
| 0.341             | 9.770   | 11.680  | 21.450      | -29.093 | 50.543 |
| 0.673             | 9.770   | 15.950  | 25.720      | -20.280 | 46.000 |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : 802.11 ac PCie Module  
Test Item : Conducted Emission Test  
Power Line : Line 1  
Test Mode : Mode 8: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Grid DISH Antenna)  
(5780MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV        | dB      | dBuV   |
| <b>Line 1</b>     |         |         |             |         |        |
| <b>Quasi-Peak</b> |         |         |             |         |        |
| 0.162             | 9.790   | 47.800  | 57.590      | -8.067  | 65.657 |
| 0.173             | 9.790   | 48.320  | 58.110      | -7.233  | 65.343 |
| 0.216             | 9.790   | 41.810  | 51.600      | -12.514 | 64.114 |
| 0.275             | 9.790   | 32.170  | 41.960      | -20.469 | 62.429 |
| 0.314             | 9.790   | 27.740  | 37.530      | -23.784 | 61.314 |
| 0.673             | 9.790   | 26.420  | 36.210      | -19.790 | 56.000 |
| <b>Average</b>    |         |         |             |         |        |
| 0.162             | 9.790   | 33.130  | 42.920      | -12.737 | 55.657 |
| 0.173             | 9.790   | 35.650  | 45.440      | -9.903  | 55.343 |
| 0.216             | 9.790   | 28.970  | 38.760      | -15.354 | 54.114 |
| 0.275             | 9.790   | 19.890  | 29.680      | -22.749 | 52.429 |
| 0.314             | 9.790   | 15.080  | 24.870      | -26.444 | 51.314 |
| 0.673             | 9.790   | 15.270  | 25.060      | -20.940 | 46.000 |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : 802.11 ac PCIe Module  
Test Item : Conducted Emission Test  
Power Line : Line 2  
Test Mode : Mode 8: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Grid DISH Antenna)  
(5780MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV        | dB      | dBuV   |
| <b>Line 2</b>     |         |         |             |         |        |
| <b>Quasi-Peak</b> |         |         |             |         |        |
| 0.166             | 9.770   | 49.590  | 59.360      | -6.183  | 65.543 |
| 0.205             | 9.770   | 42.910  | 52.680      | -11.749 | 64.429 |
| 0.224             | 9.770   | 37.840  | 47.610      | -16.276 | 63.886 |
| 0.287             | 9.770   | 31.830  | 41.600      | -20.486 | 62.086 |
| 0.330             | 9.770   | 26.170  | 35.940      | -24.917 | 60.857 |
| 0.713             | 9.775   | 26.100  | 35.875      | -20.125 | 56.000 |
| <b>Average</b>    |         |         |             |         |        |
| 0.166             | 9.770   | 37.540  | 47.310      | -8.233  | 55.543 |
| 0.205             | 9.770   | 30.120  | 39.890      | -14.539 | 54.429 |
| 0.224             | 9.770   | 24.320  | 34.090      | -19.796 | 53.886 |
| 0.287             | 9.770   | 19.180  | 28.950      | -23.136 | 52.086 |
| 0.330             | 9.770   | 13.600  | 23.370      | -27.487 | 50.857 |
| 0.713             | 9.775   | 16.250  | 26.025      | -19.975 | 46.000 |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : 802.11 ac PCIe Module  
Test Item : Conducted Emission Test  
Power Line : Line 1  
Test Mode : Mode 12: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Omni Antenna)  
(5780MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV        | dB      | dBuV   |
| <b>Line 1</b>     |         |         |             |         |        |
| <b>Quasi-Peak</b> |         |         |             |         |        |
| 0.166             | 9.697   | 18.780  | 28.477      | -37.066 | 65.543 |
| 0.509             | 9.713   | 26.880  | 36.593      | -19.407 | 56.000 |
| 0.838             | 9.728   | 14.870  | 24.598      | -31.402 | 56.000 |
| 5.627             | 9.840   | 10.030  | 19.870      | -40.130 | 60.000 |
| 10.330            | 9.880   | 12.530  | 22.410      | -37.590 | 60.000 |
| 15.963            | 9.900   | 17.530  | 27.430      | -32.570 | 60.000 |
| <b>Average</b>    |         |         |             |         |        |
| 0.166             | 9.697   | 3.850   | 13.547      | -41.996 | 55.543 |
| 0.509             | 9.713   | 13.980  | 23.693      | -22.307 | 46.000 |
| 0.838             | 9.728   | 1.370   | 11.098      | -34.902 | 46.000 |
| 5.627             | 9.840   | 1.630   | 11.470      | -38.530 | 50.000 |
| 10.330            | 9.880   | 5.000   | 14.880      | -35.120 | 50.000 |
| 15.963            | 9.900   | 9.810   | 19.710      | -30.290 | 50.000 |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : 802.11 ac PCie Module  
Test Item : Conducted Emission Test  
Power Line : Line 2  
Test Mode : Mode 12: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Omni Antenna)  
(5780MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV        | dB      | dBuV   |
| <b>Line 2</b>     |         |         |             |         |        |
| <b>Quasi-Peak</b> |         |         |             |         |        |
| 0.185             | 9.678   | 16.990  | 26.668      | -38.332 | 65.000 |
| 0.505             | 9.693   | 26.260  | 35.953      | -20.047 | 56.000 |
| 0.877             | 9.719   | 13.970  | 23.689      | -32.311 | 56.000 |
| 2.220             | 9.790   | 10.640  | 20.430      | -35.570 | 56.000 |
| 8.697             | 9.870   | 15.440  | 25.310      | -34.690 | 60.000 |
| 16.466            | 9.970   | 20.890  | 30.860      | -29.140 | 60.000 |
| <b>Average</b>    |         |         |             |         |        |
| 0.185             | 9.678   | 1.010   | 10.688      | -44.312 | 55.000 |
| 0.505             | 9.693   | 9.800   | 19.493      | -26.507 | 46.000 |
| 0.877             | 9.719   | 0.110   | 9.829       | -36.171 | 46.000 |
| 2.220             | 9.790   | -1.860  | 7.930       | -38.070 | 46.000 |
| 8.697             | 9.870   | 4.610   | 14.480      | -35.520 | 50.000 |
| 16.466            | 9.970   | 8.410   | 18.380      | -31.620 | 50.000 |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : 802.11 ac PCIe Module  
 Test Item : Conducted Emission Test  
 Power Line : Line 1  
 Test Mode : Mode 16: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Panel Antenna)  
 (5780MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV        | dB      | dBuV   |
| <b>Line 1</b>     |         |         |             |         |        |
| <b>Quasi-Peak</b> |         |         |             |         |        |
| 0.185             | 9.719   | 39.110  | 48.829      | -16.171 | 65.000 |
| 0.240             | 9.680   | 36.880  | 46.560      | -16.869 | 63.429 |
| 0.302             | 9.650   | 34.470  | 44.120      | -17.537 | 61.657 |
| 0.361             | 9.650   | 24.800  | 34.450      | -25.521 | 59.971 |
| 4.072             | 9.700   | 19.850  | 29.550      | -26.450 | 56.000 |
| 19.080            | 9.950   | 16.390  | 26.340      | -33.660 | 60.000 |
| <b>Average</b>    |         |         |             |         |        |
| 0.185             | 9.719   | 22.790  | 32.509      | -22.491 | 55.000 |
| 0.240             | 9.680   | 29.010  | 38.690      | -14.739 | 53.429 |
| 0.302             | 9.650   | 32.310  | 41.960      | -9.697  | 51.657 |
| 0.361             | 9.650   | 17.980  | 27.630      | -22.341 | 49.971 |
| 4.072             | 9.700   | 6.310   | 16.010      | -29.990 | 46.000 |
| 19.080            | 9.950   | 9.080   | 19.030      | -30.970 | 50.000 |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : 802.11 ac PCIe Module  
Test Item : Conducted Emission Test  
Power Line : Line 2  
Test Mode : Mode 16: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Panel Antenna)  
(5780MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV        | dB      | dBuV   |
| <b>Line 2</b>     |         |         |             |         |        |
| <b>Quasi-Peak</b> |         |         |             |         |        |
| 0.181             | 9.732   | 42.250  | 51.982      | -13.132 | 65.114 |
| 0.244             | 9.689   | 35.930  | 45.619      | -17.695 | 63.314 |
| 0.302             | 9.660   | 33.900  | 43.560      | -18.097 | 61.657 |
| 0.603             | 9.648   | 18.120  | 27.768      | -28.232 | 56.000 |
| 4.498             | 9.700   | 18.430  | 28.130      | -27.870 | 56.000 |
| 19.447            | 10.040  | 13.740  | 23.780      | -36.220 | 60.000 |
| <b>Average</b>    |         |         |             |         |        |
| 0.181             | 9.732   | 30.210  | 39.942      | -15.172 | 55.114 |
| 0.244             | 9.689   | 14.380  | 24.069      | -29.245 | 53.314 |
| 0.302             | 9.660   | 30.220  | 39.880      | -11.777 | 51.657 |
| 0.603             | 9.648   | 6.710   | 16.358      | -29.642 | 46.000 |
| 4.498             | 9.700   | 2.230   | 11.930      | -34.070 | 46.000 |
| 19.447            | 10.040  | 9.060   | 19.100      | -30.900 | 50.000 |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : 802.11 ac PCIE Module  
Test Item : Conducted Emission Test  
Power Line : Line 1  
Test Mode : Mode 20: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Sector Antenna)  
(5780MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV        | dB      | dBuV   |
| <b>Line 1</b>     |         |         |             |         |        |
| <b>Quasi-Peak</b> |         |         |             |         |        |
| 0.173             | 9.697   | 45.710  | 55.407      | -9.936  | 65.343 |
| 0.228             | 9.700   | 35.900  | 45.600      | -18.171 | 63.771 |
| 0.283             | 9.702   | 27.440  | 37.142      | -25.058 | 62.200 |
| 0.478             | 9.711   | 31.100  | 40.811      | -15.818 | 56.629 |
| 1.287             | 9.758   | 22.750  | 32.508      | -23.492 | 56.000 |
| 4.115             | 9.820   | 26.130  | 35.950      | -20.050 | 56.000 |
| <b>Average</b>    |         |         |             |         |        |
| 0.173             | 9.697   | 34.590  | 44.287      | -11.056 | 55.343 |
| 0.228             | 9.700   | 22.430  | 32.130      | -21.641 | 53.771 |
| 0.283             | 9.702   | 11.750  | 21.452      | -30.748 | 52.200 |
| 0.478             | 9.711   | 24.040  | 33.751      | -12.878 | 46.629 |
| 1.287             | 9.758   | 13.840  | 23.598      | -22.402 | 46.000 |
| 4.115             | 9.820   | 16.240  | 26.060      | -19.940 | 46.000 |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : 802.11 ac PCIe Module  
Test Item : Conducted Emission Test  
Power Line : Line 2  
Test Mode : Mode 20: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Sector Antenna)  
(5780MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV        | dB      | dBuV   |
| <b>Line 2</b>     |         |         |             |         |        |
| <b>Quasi-Peak</b> |         |         |             |         |        |
| 0.181             | 9.678   | 45.040  | 54.718      | -10.396 | 65.114 |
| 0.244             | 9.681   | 35.930  | 45.611      | -17.703 | 63.314 |
| 0.369             | 9.686   | 32.060  | 41.746      | -17.997 | 59.743 |
| 0.463             | 9.691   | 34.330  | 44.021      | -13.036 | 57.057 |
| 1.611             | 9.763   | 19.490  | 29.253      | -26.747 | 56.000 |
| 3.795             | 9.810   | 25.860  | 35.670      | -20.330 | 56.000 |
| <b>Average</b>    |         |         |             |         |        |
| 0.181             | 9.678   | 37.250  | 46.928      | -8.186  | 55.114 |
| 0.244             | 9.681   | 24.500  | 34.181      | -19.133 | 53.314 |
| 0.369             | 9.686   | 21.020  | 30.706      | -19.037 | 49.743 |
| 0.463             | 9.691   | 26.940  | 36.631      | -10.426 | 47.057 |
| 1.611             | 9.763   | 7.150   | 16.913      | -29.087 | 46.000 |
| 3.795             | 9.810   | 16.560  | 26.370      | -19.630 | 46.000 |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

### 3. Maximum Conducted Power


#### 3.1. Test Equipment

|   | Equipment         | Manufacturer | Model No./Serial No. | Last Cal.  |
|---|-------------------|--------------|----------------------|------------|
| X | Power Meter       | Anritsu      | ML2495A/6K00003357   | May, 2015  |
| X | Power Sensor      | Anritsu      | MA2411B/0738448      | Jun, 2014  |
|   | Spectrum Analyzer | R&S          | FSP40 / 100170       | Jun, 2014  |
|   | Spectrum Analyzer | Agilent      | E4407B / US39440758  | Jun, 2014  |
|   | Spectrum Analyzer | Agilent      | N9010A / MY48030495  | Apr., 2015 |

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

#### 3.2. Test Setup

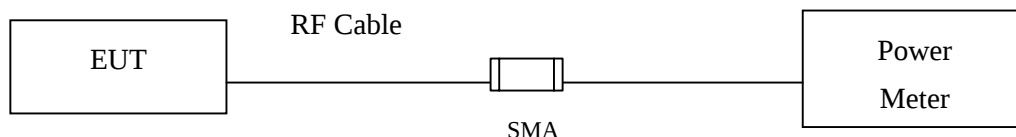

#### 3.3. Limits

The maximum average power shall be less 1 Watt. (Section 15.247 (b)(3))

#### 3.4. Test Procedure

The EUT was tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using KDB 558074 section 9.1.3 PKPM1 Peak power meter method.

#### 3.5. Uncertainty

$\pm 1.27$  dB

### 3.6. Test Result of Maximum Conducted Power

Product : 802.11 ac PCIe Module  
Test Item : Maximum Conducted Power  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit - 802.11a\_6Mbps(Dipole Antenna)

#### CHAIN A

| Channel No | Frequency<br>(MHz) | Average Power<br>For different Data Rate (Mbps) |       |    |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|-------------------------------------------------|-------|----|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | 6                                               | 9     | 12 | 18    | 24    | 36    | 48    | 54    |                   |        |
|            |                    | Measurement Level (dBm)                         |       |    |       |       |       |       |       |                   |        |
| 149        | 5745               | 26.22                                           | -     | -  | -     | -     | -     | -     | -     | <30dBm            | Pass   |
| 157        | 5785               | 26.31                                           | 26.12 | 26 | 25.84 | 25.67 | 25.52 | 25.44 | 25.37 | <30dBm            | Pass   |
| 165        | 5825               | 26.21                                           | -     | -  | -     | -     | -     | -     | -     | <30dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN B

| Channel No | Frequency<br>(MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | 6                                               | 9     | 12    | 18    | 24    | 36    | 48    | 54    |                   |        |
|            |                    | Measurement Level (dBm)                         |       |       |       |       |       |       |       |                   |        |
| 149        | 5745               | 24.89                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |
| 157        | 5785               | 24.94                                           | 24.82 | 24.76 | 24.62 | 24.47 | 24.23 | 24.14 | 23.95 | <30dBm            | Pass   |
| 165        | 5825               | 24.87                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN A+B

| Channel | Frequency<br>(MHz) | Data Rate<br>(Mbps) | Chain A<br>Power<br>(dBm) | Chain B<br>Power<br>(dBm) | Chain A+B<br>Power<br>(dBm) | Limit<br>(dBm) | Result |
|---------|--------------------|---------------------|---------------------------|---------------------------|-----------------------------|----------------|--------|
| 149     | 5745               | 6                   | 26.22                     | 24.89                     | 28.62                       | <30dBm         | Pass   |
| 157     | 5785               | 6                   | 26.31                     | 24.94                     | 28.69                       | <30dBm         | Pass   |
| 165     | 5825               | 6                   | 26.21                     | 24.87                     | 28.60                       | <30dBm         | Pass   |

Note: Power Output Value (dBm) = 10\*LOG (Chain A (mW)+ Chain B (mW))

Product : 802.11 ac PCIE Module  
Test Item : Maximum Conducted Power  
Test Site : No.3 OATS  
Test Mode : Mode 2: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Dipole Antenna)

#### CHAIN A

| Channel No | Frequency<br>(MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | HT0                                             | HT1   | HT2   | HT3   | HT4   | HT5   | HT6   | HT7   |                   |        |
|            |                    | Measurement Level (dBm)                         |       |       |       |       |       |       |       |                   |        |
| 149        | 5745               | 26.13                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |
| 157        | 5785               | 26.15                                           | 26.01 | 25.88 | 25.69 | 25.54 | 25.41 | 25.28 | 25.19 | <30dBm            | Pass   |
| 165        | 5825               | 26.06                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN B

TABLE 2

| Channel No | Frequency<br>(MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | HT0                                             | HT1   | HT2   | HT3   | HT4   | HT5   | HT6   | HT7   |                   |        |
|            |                    | Measurement Level (dBm)                         |       |       |       |       |       |       |       |                   |        |
| 149        | 5745               | 24.79                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |
| 157        | 5785               | 24.83                                           | 24.69 | 24.57 | 24.48 | 24.37 | 24.22 | 24.16 | 24.04 | <30dBm            | Pass   |
| 165        | 5825               | 24.72                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN A+B

| Channel | Frequency<br>(MHz) | Data Rate<br>(Mbps) | Chain A<br>Power<br>(dBm) | Chain B<br>Power<br>(dBm) | Chain A+B<br>Power<br>(dBm) | Limit<br>(dBm) | Result |
|---------|--------------------|---------------------|---------------------------|---------------------------|-----------------------------|----------------|--------|
| 149     | 5745               | HT0                 | 26.13                     | 24.79                     | 28.52                       | <30dBm         | Pass   |
| 157     | 5785               | HT0                 | 26.15                     | 24.83                     | 28.55                       | <30dBm         | Pass   |
| 165     | 5825               | HT0                 | 26.06                     | 24.72                     | 28.45                       | <30dBm         | Pass   |

Note: Power Output Value (dBm) = 10\*LOG (Chain A (mW)+ Chain B (mW))

Product : 802.11 ac PCIe Module  
Test Item : Maximum Conducted Power  
Test Site : No.3 OATS  
Test Mode : Mode 3: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Dipole Antenna)

#### CHAIN A

| Channel No | Frequency<br>(MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | HT0                                             | HT1   | HT2   | HT3   | HT4   | HT5   | HT6   | HT7   |                   |        |
|            |                    | Measurement Level (dBm)                         |       |       |       |       |       |       |       |                   |        |
| 151        | 5755               | 26.22                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |
| 159        | 5795               | 26.39                                           | 26.27 | 26.11 | 26.04 | 25.91 | 25.77 | 25.57 | 25.41 | <30dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN B

| Channel No | Frequency<br>(MHz) | Average Power                  |       |       |       |      |       |       |       | Required<br>Limit | Result |
|------------|--------------------|--------------------------------|-------|-------|-------|------|-------|-------|-------|-------------------|--------|
|            |                    | For different Data Rate (Mbps) |       |       |       |      |       |       |       |                   |        |
|            |                    | HT0                            | HT1   | HT2   | HT3   | HT4  | HT5   | HT6   | HT7   |                   |        |
|            |                    | Measurement Level (dBm)        |       |       |       |      |       |       |       |                   |        |
| 151        | 5755               | 24.76                          | -     | -     | -     | -    | -     | -     | -     | <30dBm            | Pass   |
| 159        | 5795               | 25.39                          | 26.01 | 25.74 | 25.32 | 25.1 | 24.69 | 24.24 | 23.89 | <30dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN A+B

| Channel | Frequency (MHz) | Data Rate (Mbps) | Chain A Power (dBm) | Chain B Power (dBm) | Chain A+B Power (dBm) | Limit (dBm) | Result |
|---------|-----------------|------------------|---------------------|---------------------|-----------------------|-------------|--------|
| 151     | 5755            | HT0              | 26.22               | 24.76               | 28.56                 | <30dBm      | Pass   |
| 159     | 5795            | HT0              | 26.39               | 25.39               | 28.93                 | <30dBm      | Pass   |

Note: Power Output Value (dBm) = 10\*LOG (Chain A (mW)+ Chain B (mW))

Product : 802.11 ac PCIe Module  
Test Item : Peak Power Output Data  
Test Site : No.3 OATS  
Test Mode : Mode 4: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Dipole Antenna)

#### CHAIN A

| Channel No | Frequency (MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |      |       |       |       |       |       | Required Limit | Result |
|------------|-----------------|-------------------------------------------------|-------|-------|-------|------|-------|-------|-------|-------|-------|----------------|--------|
|            |                 | VHT0                                            | VHT1  | VHT2  | VHT3  | VHT4 | VHT5  | VHT6  | VHT7  | VHT8  | VHT9  |                |        |
|            |                 | Measurement Level (dBm)                         |       |       |       |      |       |       |       |       |       |                |        |
| 1          | 5780            | 26.30                                           | 26.28 | 26.24 | 26.22 | 26.2 | 26.15 | 26.12 | 26.04 | 25.94 | 25.87 | <30dBm         | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN B

| Channel No | Frequency (MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |      |       |       |       |       | Required Limit | Result |
|------------|-----------------|-------------------------------------------------|-------|-------|-------|-------|------|-------|-------|-------|-------|----------------|--------|
|            |                 | VHT0                                            | VHT1  | VHT2  | VHT3  | VHT4  | VHT5 | VHT6  | VHT7  | VHT8  | VHT9  |                |        |
|            |                 | Measurement Level (dBm)                         |       |       |       |       |      |       |       |       |       |                |        |
| 1          | 5780            | 25.91                                           | 25.86 | 25.82 | 25.79 | 26.75 | 25.7 | 25.67 | 25.64 | 25.59 | 25.55 | <30dBm         | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN A+B

| Channel | Frequency (MHz) | Data Rate (Mbps) | Chain A Power (dBm) | Chain B Power (dBm) | Chain A+B Power (dBm) | Limit (dBm) | Result |
|---------|-----------------|------------------|---------------------|---------------------|-----------------------|-------------|--------|
| 1       | 5780            | VHT0             | 26.30               | 25.91               | 29.12                 | <30dBm      | Pass   |

Note: Power Output Value (dBm) = 10\*LOG (Chain A (mW)+ Chain B (mW))

Figure Channel 156: CHAIN A


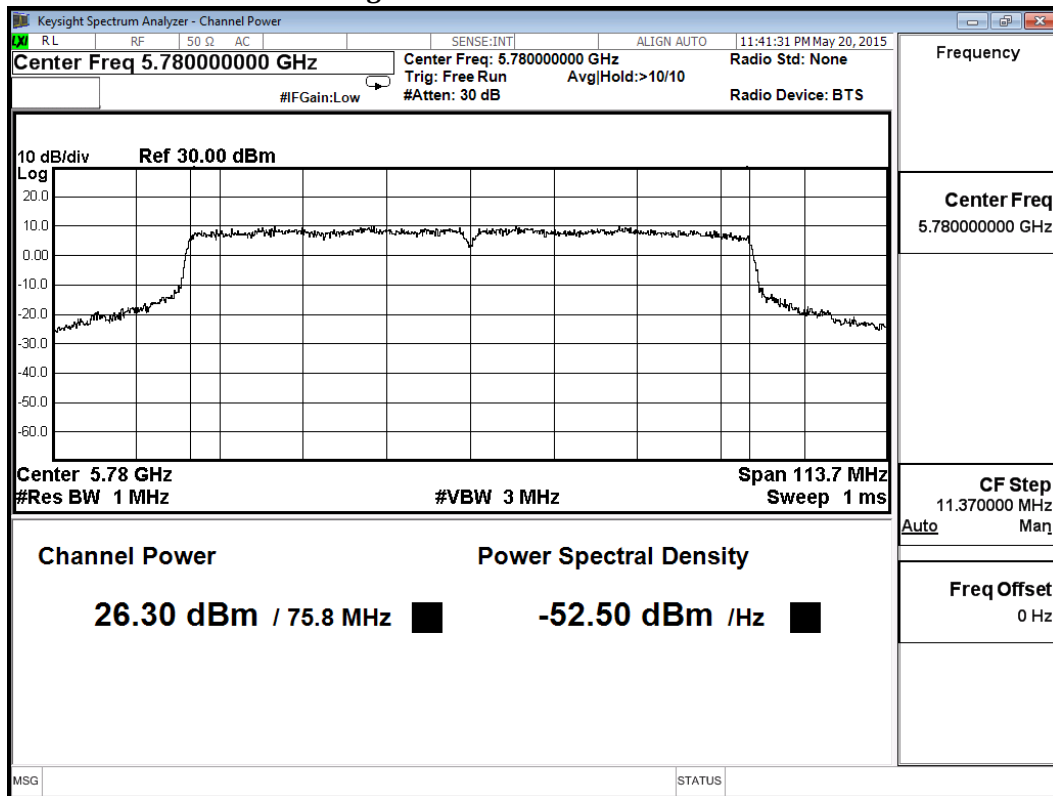


Figure Channel 156: CHAIN B

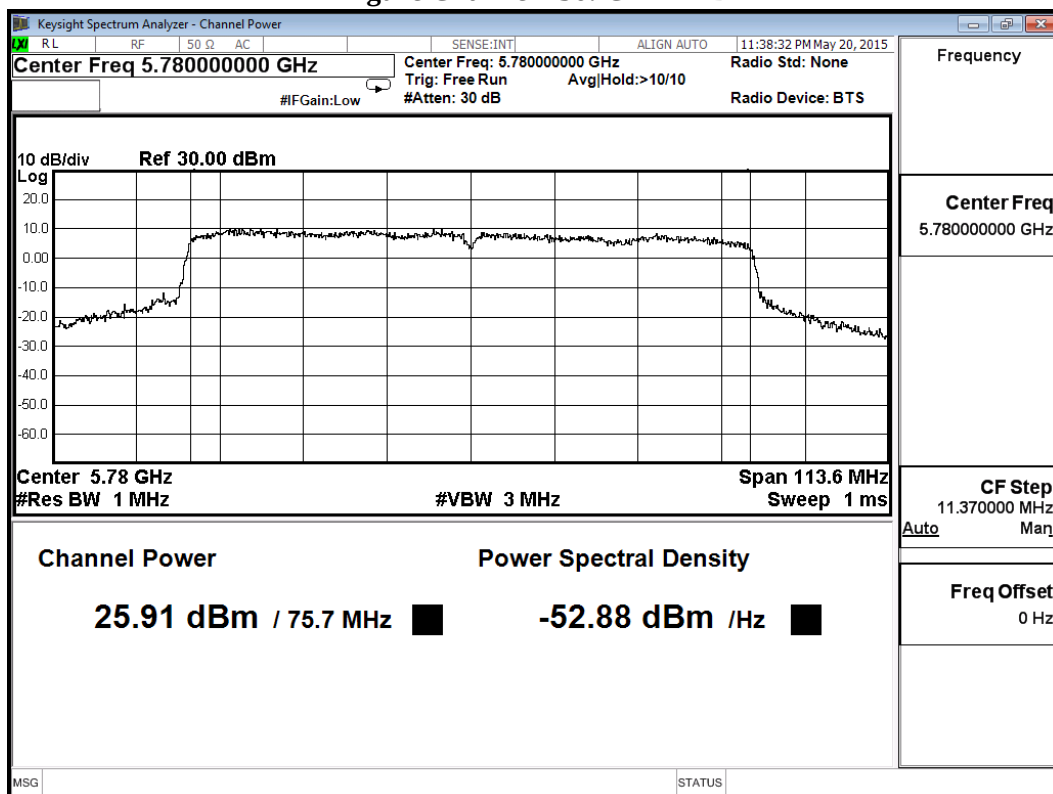

Product : 802.11 ac PCIe Module  
Test Item : Maximum Conducted Power  
Test Site : No.3 OATS  
Test Mode : Mode 5: Transmit - 802.11a\_6Mbps(Grid DISH Antenna)

#### CHAIN A

| Channel No | Frequency<br>(MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | 6                                               | 9     | 12    | 18    | 24    | 36    | 48    | 54    |                   |        |
|            |                    | Measurement Level (dBm)                         |       |       |       |       |       |       |       |                   |        |
| 149        | 5745               | 16.23                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |
| 157        | 5785               | 15.19                                           | 15.11 | 15.02 | 14.92 | 14.81 | 14.65 | 14.51 | 14.39 | <30dBm            | Pass   |
| 165        | 5825               | 19.25                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN B

| Channel No | Frequency<br>(MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | 6                                               | 9     | 12    | 18    | 24    | 36    | 48    | 54    |                   |        |
|            |                    | Measurement Level (dBm)                         |       |       |       |       |       |       |       |                   |        |
| 149        | 5745               | 16.53                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |
| 157        | 5785               | 15.17                                           | 15.04 | 14.97 | 14.82 | 14.64 | 14.52 | 14.43 | 14.37 | <30dBm            | Pass   |
| 165        | 5825               | 19.25                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN A+B

| Channel | Frequency<br>(MHz) | Data Rate<br>(Mbps) | Chain A<br>Power<br>(dBm) | Chain B<br>Power<br>(dBm) | Chain A+B<br>Power<br>(dBm) | Limit<br>(dBm) | Result |
|---------|--------------------|---------------------|---------------------------|---------------------------|-----------------------------|----------------|--------|
| 149     | 5745               | 23.85               | 16.23                     | 16.53                     | 19.39                       | <30dBm         | Pass   |
| 157     | 5785               | 23.85               | 15.19                     | 15.17                     | 18.19                       | <30dBm         | Pass   |
| 165     | 5825               | 23.85               | 19.25                     | 19.25                     | 22.26                       | <30dBm         | Pass   |

Note: Power Output Value (dBm) = 10\*LOG (Chain A (mW)+ Chain B (mW))

Product : 802.11 ac PCIE Module  
Test Item : Maximum Conducted Power  
Test Site : No.3 OATS  
Test Mode : Mode 6: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Grid DISH Antenna)

#### CHAIN A

| Channel No | Frequency<br>(MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | HT0                                             | HT1   | HT2   | HT3   | HT4   | HT5   | HT6   | HT7   |                   |        |
|            |                    | Measurement Level (dBm)                         |       |       |       |       |       |       |       |                   |        |
| 149        | 5745               | 15.71                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |
| 157        | 5785               | 15.54                                           | 15.44 | 15.31 | 15.22 | 15.02 | 14.99 | 14.82 | 14.72 | <30dBm            | Pass   |
| 165        | 5825               | 18.43                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN B

| Channel No | Frequency<br>(MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | HT0                                             | HT1   | HT2   | HT3   | HT4   | HT5   | HT6   | HT7   |                   |        |
|            |                    | Measurement Level (dBm)                         |       |       |       |       |       |       |       |                   |        |
| 149        | 5745               | 16.28                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |
| 157        | 5785               | 15.56                                           | 15.47 | 15.33 | 15.21 | 15.12 | 15.02 | 14.83 | 14.77 | <30dBm            | Pass   |
| 165        | 5825               | 18.61                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN A+B

| Channel | Frequency<br>(MHz) | Data Rate<br>(Mbps) | Chain A<br>Power<br>(dBm) | Chain B<br>Power<br>(dBm) | Chain A+B<br>Power<br>(dBm) | Limit<br>(dBm) | Result |
|---------|--------------------|---------------------|---------------------------|---------------------------|-----------------------------|----------------|--------|
| 149     | 5745               | HT0                 | 15.71                     | 16.28                     | 19.01                       | <30dBm         | Pass   |
| 157     | 5785               | HT0                 | 15.54                     | 15.56                     | 18.56                       | <30dBm         | Pass   |
| 165     | 5825               | HT0                 | 18.43                     | 18.61                     | 21.53                       | <30dBm         | Pass   |

Note: Power Output Value (dBm) = 10\*LOG (Chain A (mW)+ Chain B (mW))

Product : 802.11 ac PCIe Module  
Test Item : Maximum Conducted Power  
Test Site : No.3 OATS  
Test Mode : Mode 7: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Grid DISH Antenna)

#### CHAIN A

| Channel No | Frequency<br>(MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | HT0                                             | HT1   | HT2   | HT3   | HT4   | HT5   | HT6   | HT7   |                   |        |
|            |                    | Measurement Level (dBm)                         |       |       |       |       |       |       |       |                   |        |
| 151        | 5755               | 21.08                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |
| 159        | 5795               | 17.73                                           | 17.55 | 17.51 | 17.48 | 17.42 | 17.31 | 17.25 | 17.13 | <30dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN B

| Channel No | Frequency<br>(MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | HT0                                             | HT1   | HT2   | HT3   | HT4   | HT5   | HT6   | HT7   |                   |        |
|            |                    | Measurement Level (dBm)                         |       |       |       |       |       |       |       |                   |        |
| 151        | 5755               | 20.54                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |
| 159        | 5795               | 18.31                                           | 18.11 | 17.98 | 17.74 | 17.52 | 17.31 | 17.02 | 16.87 | <30dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN A+B

| Channel | Frequency<br>(MHz) | Data Rate<br>(Mbps) | Chain A<br>Power<br>(dBm) | Chain B<br>Power<br>(dBm) | Chain A+B<br>Power<br>(dBm) | Limit<br>(dBm) | Result |
|---------|--------------------|---------------------|---------------------------|---------------------------|-----------------------------|----------------|--------|
| 151     | 5755               | HT0                 | 21.08                     | 20.54                     | 23.83                       | <30dBm         | Pass   |
| 159     | 5795               | HT0                 | 17.73                     | 18.31                     | 21.04                       | <30dBm         | Pass   |

Note: Power Output Value (dBm) = 10\*LOG (Chain A (mW)+ Chain B (mW))

Product : 802.11 ac PCIe Module  
 Test Item : Peak Power Output Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 8: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Grid DISH Antenna)

**CHAIN A**

| Channel No              | Frequency (MHz) | Average Power                  |       |       |       |       |       |       |       |       |       | Required Limit | Result |
|-------------------------|-----------------|--------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|----------------|--------|
|                         |                 | For different Data Rate (Mbps) |       |       |       |       |       |       |       |       |       |                |        |
|                         |                 | VHT0                           | VHT1  | VHT2  | VHT3  | VHT4  | VHT5  | VHT6  | VHT7  | VHT8  | VHT9  |                |        |
| Measurement Level (dBm) |                 |                                |       |       |       |       |       |       |       |       |       |                |        |
| 1                       | 5780            | 19.89                          | 19.85 | 19.82 | 19.78 | 19.75 | 19.71 | 19.66 | 19.61 | 19.58 | 19.55 | <30dBm         | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

**CHAIN B**

| Channel No              | Frequency (MHz) | Average Power                  |       |       |      |       |       |       |       |       |       | Required Limit | Result |
|-------------------------|-----------------|--------------------------------|-------|-------|------|-------|-------|-------|-------|-------|-------|----------------|--------|
|                         |                 | For different Data Rate (Mbps) |       |       |      |       |       |       |       |       |       |                |        |
|                         |                 | VHT0                           | VHT1  | VHT2  | VHT3 | VHT4  | VHT5  | VHT6  | VHT7  | VHT8  | VHT9  |                |        |
| Measurement Level (dBm) |                 |                                |       |       |      |       |       |       |       |       |       |                |        |
| 1                       | 5780            | 20.11                          | 20.06 | 20.05 | 20   | 19.97 | 19.93 | 19.86 | 19.81 | 19.77 | 19.73 | <30dBm         | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

**CHAIN A+B**

| Channel | Frequency (MHz) | Data Rate (Mbps) | Chain A Power (dBm) | Chain B Power (dBm) | Chain A+B Power (dBm) | Limit (dBm) | Result |
|---------|-----------------|------------------|---------------------|---------------------|-----------------------|-------------|--------|
| 1       | 5780            | VHT0             | 19.89               | 20.11               | 23.01                 | <30dBm      | Pass   |

Note: Power Output Value (dBm) = 10\*LOG (Chain A (mW)+ Chain B (mW))

Figure Channel 156: CHAIN A


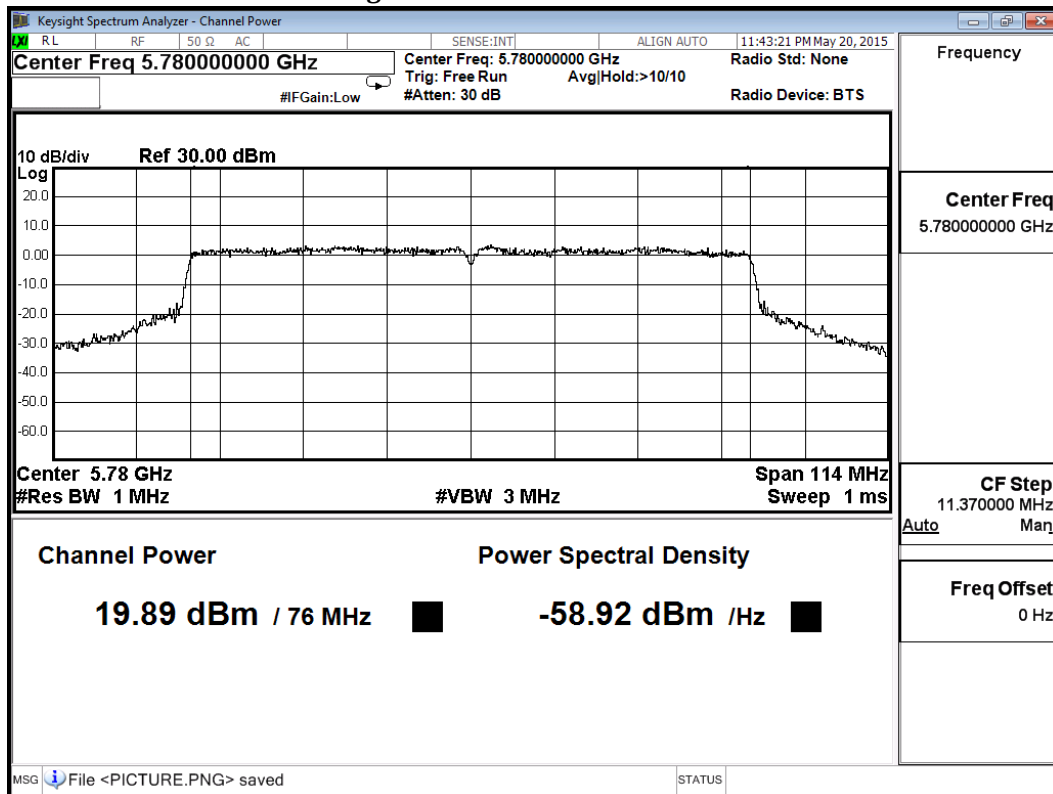


Figure Channel 156: CHAIN B

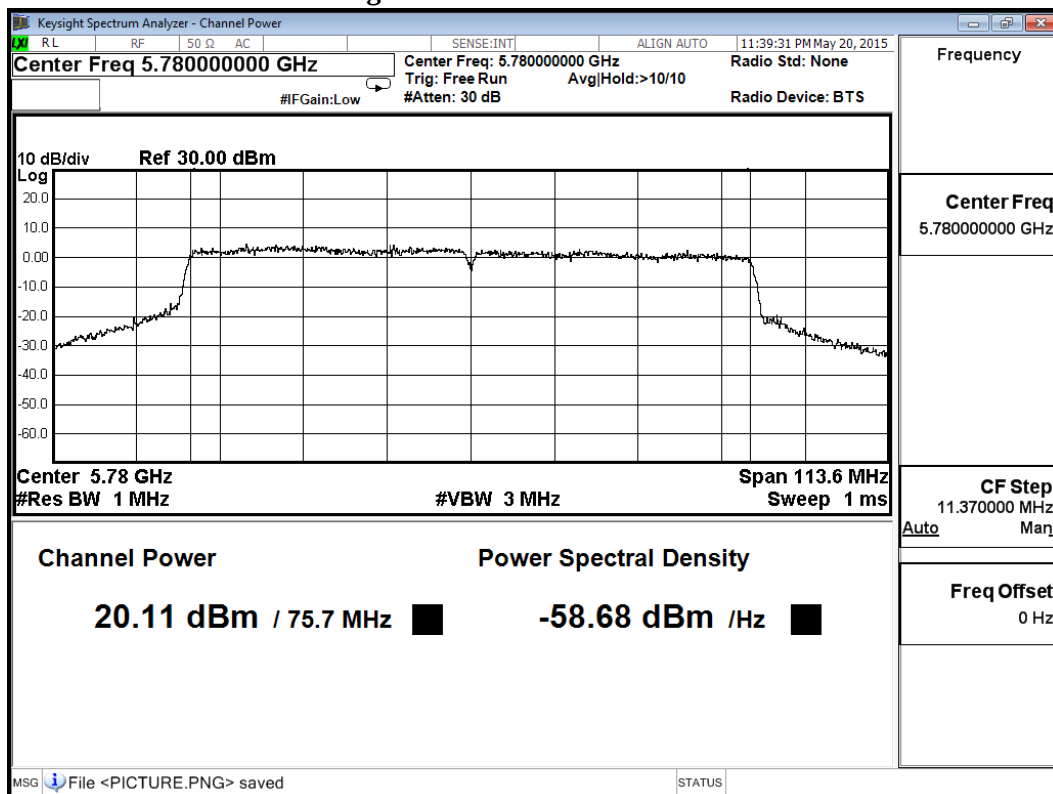

Product : 802.11 ac PCIe Module  
Test Item : Maximum Conducted Power  
Test Site : No.3 OATS  
Test Mode : Mode 9: Transmit - 802.11a\_6Mbps(Omni Antenna)

#### CHAIN A

| Channel No | Frequency<br>(MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | 6                                               | 9     | 12    | 18    | 24    | 36    | 48    | 54    |                   |        |
|            |                    | Measurement Level (dBm)                         |       |       |       |       |       |       |       |                   |        |
| 149        | 5745               | 23.07                                           | -     | -     | -     | -     | -     | -     | -     | <26dBm            | Pass   |
| 157        | 5785               | 23.23                                           | 23.12 | 22.97 | 22.86 | 22.82 | 22.74 | 22.68 | 22.66 | <26dBm            | Pass   |
| 165        | 5825               | 22.99                                           | -     | -     | -     | -     | -     | -     | -     | <26dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN B

Channel No

| Channel No | Frequency<br>(MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | 6                                               | 9     | 12    | 18    | 24    | 36    | 48    | 54    |                   |        |
|            |                    | Measurement Level (dBm)                         |       |       |       |       |       |       |       |                   |        |
| 149        | 5745               | 22.58                                           | -     | -     | -     | -     | -     | -     | -     | <26dBm            | Pass   |
| 157        | 5785               | 22.62                                           | 22.54 | 22.33 | 22.16 | 22.05 | 21.88 | 21.72 | 21.61 | <26dBm            | Pass   |
| 165        | 5825               | 22.57                                           | -     | -     | -     | -     | -     | -     | -     | <26dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN A+B

| Channel | Frequency<br>(MHz) | Data Rate<br>(Mbps) | Chain A<br>Power<br>(dBm) | Chain B<br>Power<br>(dBm) | Chain A+B<br>Power<br>(dBm) | Limit<br>(dBm) | Result |
|---------|--------------------|---------------------|---------------------------|---------------------------|-----------------------------|----------------|--------|
| 149     | 5745               | 6                   | 23.07                     | 22.58                     | 25.84                       | <26dBm         | Pass   |
| 157     | 5785               | 6                   | 23.23                     | 22.62                     | 25.95                       | <26dBm         | Pass   |
| 165     | 5825               | 6                   | 22.99                     | 22.57                     | 25.80                       | <26dBm         | Pass   |

Note: Power Output Value (dBm) = 10\*LOG (Chain A (mW)+ Chain B (mW))

Product : 802.11 ac PCIE Module  
Test Item : Maximum Conducted Power  
Test Site : No.3 OATS  
Test Mode : Mode 10: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Omni Antenna)

#### CHAIN A

| Channel No | Frequency<br>(MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | HT0                                             | HT1   | HT2   | HT3   | HT4   | HT5   | HT6   | HT7   |                   |        |
|            |                    | Measurement Level (dBm)                         |       |       |       |       |       |       |       |                   |        |
| 149        | 5745               | 23.25                                           | -     | -     | -     | -     | -     | -     | -     | <26dBm            | Pass   |
| 157        | 5785               | 23.08                                           | 22.99 | 22.87 | 22.74 | 22.63 | 22.54 | 22.42 | 22.35 | <26dBm            | Pass   |
| 165        | 5825               | 23.02                                           | -     | -     | -     | -     | -     | -     | -     | <26dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN B

TABLE 2

| Channel No | Frequency<br>(MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | HT0                                             | HT1   | HT2   | HT3   | HT4   | HT5   | HT6   | HT7   |                   |        |
|            |                    | Measurement Level (dBm)                         |       |       |       |       |       |       |       |                   |        |
| 149        | 5745               | 22.66                                           | -     | -     | -     | -     | -     | -     | -     | <26dBm            | Pass   |
| 157        | 5785               | 22.77                                           | 22.68 | 22.56 | 22.48 | 22.41 | 22.35 | 22.17 | 22.05 | <26dBm            | Pass   |
| 165        | 5825               | 22.77                                           | -     | -     | -     | -     | -     | -     | -     | <26dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN A+B

| Channel | Frequency<br>(MHz) | Data Rate<br>(Mbps) | Chain A<br>Power<br>(dBm) | Chain B<br>Power<br>(dBm) | Chain A+B<br>Power<br>(dBm) | Limit<br>(dBm) | Result |
|---------|--------------------|---------------------|---------------------------|---------------------------|-----------------------------|----------------|--------|
| 149     | 5745               | HT0                 | 23.25                     | 22.66                     | 25.98                       | <26dBm         | Pass   |
| 157     | 5785               | HT0                 | 23.08                     | 22.77                     | 25.94                       | <26dBm         | Pass   |
| 165     | 5825               | HT0                 | 23.02                     | 22.77                     | 25.91                       | <26dBm         | Pass   |

Note: Power Output Value (dBm) = 10\*LOG (Chain A (mW)+ Chain B (mW))

Product : 802.11 ac PCIe Module  
Test Item : Maximum Conducted Power  
Test Site : No.3 OATS  
Test Mode : Mode 11: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Omni Antenna)

#### CHAIN A

| Channel No | Frequency<br>(MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |       |       |      | Required<br>Limit | Result |
|------------|--------------------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|------|-------------------|--------|
|            |                    | HT0                                             | HT1   | HT2   | HT3   | HT4   | HT5   | HT6   | HT7  |                   |        |
|            |                    | Measurement Level (dBm)                         |       |       |       |       |       |       |      |                   |        |
| 151        | 5755               | 23.07                                           | -     | -     | -     | -     | -     | -     | -    | <26dBm            | Pass   |
| 159        | 5795               | 23.16                                           | 23.03 | 22.94 | 22.75 | 22.67 | 22.59 | 22.48 | 22.4 | <26dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN B

| Channel No | Frequency<br>(MHz) | Average Power                  |       |       |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|--------------------------------|-------|-------|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | For different Data Rate (Mbps) |       |       |       |       |       |       |       |                   |        |
|            |                    | HT0                            | HT1   | HT2   | HT3   | HT4   | HT5   | HT6   | HT7   |                   |        |
|            |                    | Measurement Level (dBm)        |       |       |       |       |       |       |       |                   |        |
| 151        | 5755               | 22.53                          | -     | -     | -     | -     | -     | -     | -     | <26dBm            | Pass   |
| 159        | 5795               | 22.79                          | 22.67 | 22.54 | 22.49 | 22.46 | 22.34 | 22.18 | 22.04 | <26dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN A+B

| Channel | Frequency (MHz) | Data Rate (Mbps) | Chain A Power (dBm) | Chain B Power (dBm) | Chain A+B Power (dBm) | Limit (dBm) | Result |
|---------|-----------------|------------------|---------------------|---------------------|-----------------------|-------------|--------|
| 151     | 5755            | HT0              | 23.07               | 22.53               | 25.82                 | <26dBm      | Pass   |
| 159     | 5795            | HT0              | 23.16               | 22.79               | 25.99                 | <26dBm      | Pass   |

Note: Power Output Value (dBm) = 10\*LOG (Chain A (mW)+ Chain B (mW))

Product : 802.11 ac PCIe Module  
Test Item : Peak Power Output Data  
Test Site : No.3 OATS  
Test Mode : Mode 12: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Omni Antenna)

#### CHAIN A

| Channel No | Frequency (MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |       |       |       |       |       | Required Limit | Result |
|------------|-----------------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|----------------|--------|
|            |                 | VHT0                                            | VHT1  | VHT2  | VHT3  | VHT4  | VHT5  | VHT6  | VHT7  | VHT8  | VHT9  |                |        |
|            |                 | Measurement Level (dBm)                         |       |       |       |       |       |       |       |       |       |                |        |
| 156        | 22.19           | 22.14                                           | 22.09 | 22.06 | 22.01 | 21.99 | 21.94 | 21.89 | 21.85 | 21.81 | 27.51 | <26dBm         | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN B

| Channel No | Frequency (MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |       |       |       |       |       | Required Limit | Result |
|------------|-----------------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|----------------|--------|
|            |                 | VHT0                                            | VHT1  | VHT2  | VHT3  | VHT4  | VHT5  | VHT6  | VHT7  | VHT8  | VHT9  |                |        |
|            |                 | Measurement Level (dBm)                         |       |       |       |       |       |       |       |       |       |                |        |
| 1          | 5780            | 22.1                                            | 22.07 | 22.04 | 22.02 | 22.01 | 21.98 | 21.94 | 21.92 | 21.89 | 21.83 | <26dBm         | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN A+B

| Channel | Frequency (MHz) | Data Rate (Mbps) | Chain A Power (dBm) | Chain B Power (dBm) | Chain A+B Power (dBm) | Limit (dBm) | Result |
|---------|-----------------|------------------|---------------------|---------------------|-----------------------|-------------|--------|
| 1       | 5780            | VHT0             | 22.19               | 22.10               | 25.16                 | <26dBm      | Pass   |

Note: Power Output Value (dBm) = 10\*LOG (Chain A (mW)+ Chain B (mW))

Figure Channel 156: CHAIN A


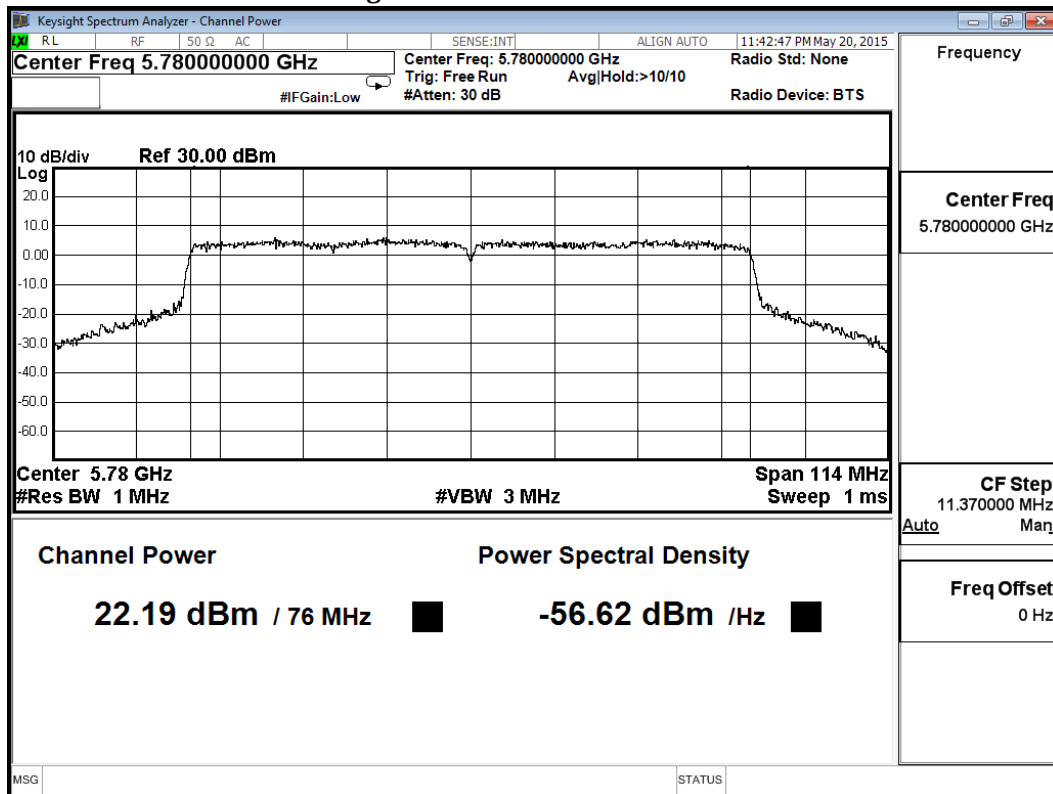


Figure Channel 156: CHAIN B

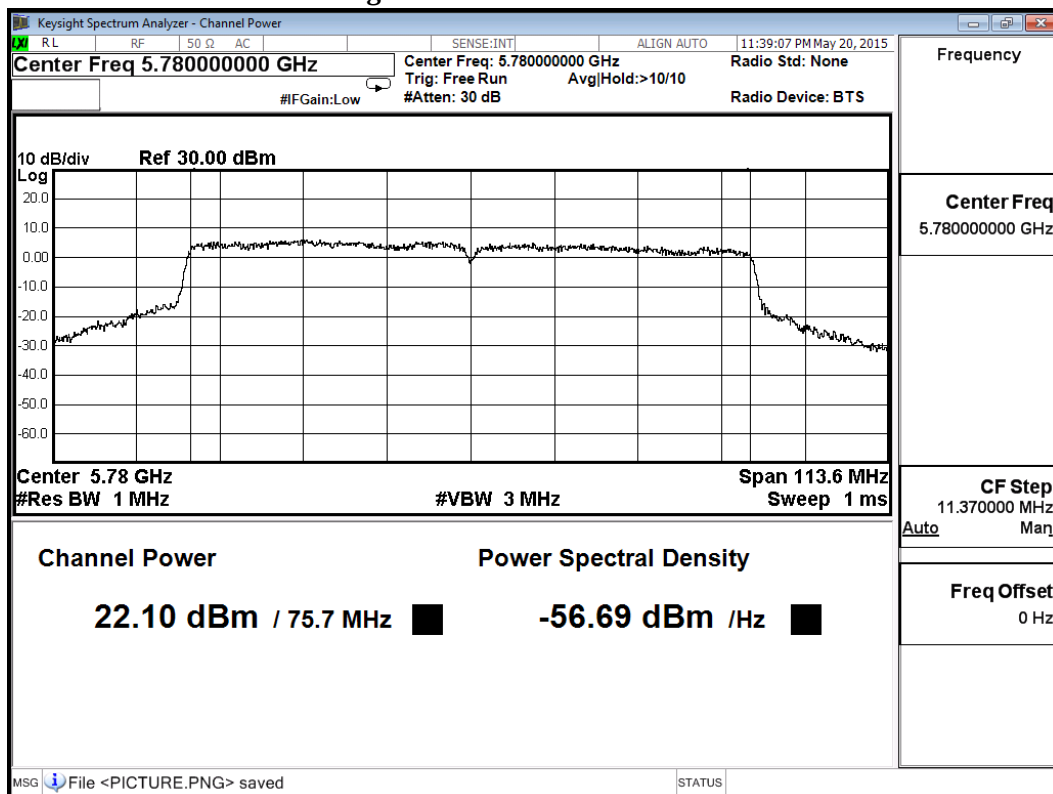

Product : 802.11 ac PCIe Module  
Test Item : Maximum Conducted Power  
Test Site : No.3 OATS  
Test Mode : Mode 13: Transmit - 802.11a\_6Mbps(Panel Antenna)

#### CHAIN A

| Channel No | Frequency<br>(MHz) | Average Power<br>For different Data Rate (Mbps) |       |    |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|-------------------------------------------------|-------|----|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | 6                                               | 9     | 12 | 18    | 24    | 36    | 48    | 54    |                   |        |
|            |                    | Measurement Level (dBm)                         |       |    |       |       |       |       |       |                   |        |
| 149        | 5745               | 26.22                                           | -     | -  | -     | -     | -     | -     | -     | <30dBm            | Pass   |
| 157        | 5785               | 26.31                                           | 26.12 | 26 | 25.84 | 25.67 | 25.52 | 25.44 | 25.37 | <30dBm            | Pass   |
| 165        | 5825               | 26.21                                           | -     | -  | -     | -     | -     | -     | -     | <30dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN B

| Channel No | Frequency<br>(MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | 6                                               | 9     | 12    | 18    | 24    | 36    | 48    | 54    |                   |        |
|            |                    | Measurement Level (dBm)                         |       |       |       |       |       |       |       |                   |        |
|            |                    |                                                 |       |       |       |       |       |       |       |                   |        |
| 149        | 5745               | 24.89                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |
| 157        | 5785               | 24.94                                           | 24.82 | 24.76 | 24.62 | 24.47 | 24.23 | 24.14 | 23.95 | <30dBm            | Pass   |
| 165        | 5825               | 24.87                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN A+B

| Channel | Frequency<br>(MHz) | Data Rate<br>(Mbps) | Chain A<br>Power<br>(dBm) | Chain B<br>Power<br>(dBm) | Chain A+B<br>Power<br>(dBm) | Limit<br>(dBm) | Result |
|---------|--------------------|---------------------|---------------------------|---------------------------|-----------------------------|----------------|--------|
| 149     | 5745               | 6                   | 26.22                     | 24.89                     | 28.62                       | <30dBm         | Pass   |
| 157     | 5785               | 6                   | 26.31                     | 24.94                     | 28.69                       | <30dBm         | Pass   |
| 165     | 5825               | 6                   | 26.21                     | 24.87                     | 28.60                       | <30dBm         | Pass   |

Note: Power Output Value (dBm) = 10\*LOG (Chain A (mW)+ Chain B (mW))

Product : 802.11 ac PCIE Module  
Test Item : Maximum Conducted Power  
Test Site : No.3 OATS  
Test Mode : Mode 14: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Panel Antenna)

#### CHAIN A

| Channel No | Frequency<br>(MHz) | Average Power                  |       |       |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|--------------------------------|-------|-------|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | For different Data Rate (Mbps) |       |       |       |       |       |       |       |                   |        |
|            |                    | HT0                            | HT1   | HT2   | HT3   | HT4   | HT5   | HT6   | HT7   |                   |        |
|            |                    | Measurement Level (dBm)        |       |       |       |       |       |       |       |                   |        |
| 149        | 5745               | 26.13                          | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |
| 157        | 5785               | 26.15                          | 26.01 | 25.88 | 25.69 | 25.54 | 25.41 | 25.28 | 25.19 | <30dBm            | Pass   |
| 165        | 5825               | 26.06                          | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN B

| Channel No | Frequency<br>(MHz) | Average Power                  |       |       |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|--------------------------------|-------|-------|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | For different Data Rate (Mbps) |       |       |       |       |       |       |       |                   |        |
|            |                    | HT0                            | HT1   | HT2   | HT3   | HT4   | HT5   | HT6   | HT7   |                   |        |
|            |                    | Measurement Level (dBm)        |       |       |       |       |       |       |       |                   |        |
| 149        | 5745               | 24.79                          | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |
| 157        | 5785               | 24.83                          | 24.69 | 24.57 | 24.48 | 24.37 | 24.22 | 24.16 | 24.04 | <30dBm            | Pass   |
| 165        | 5825               | 24.72                          | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN A+B

| Channel | Frequency (MHz) | Data Rate (Mbps) | Chain A Power (dBm) | Chain B Power (dBm) | Chain A+B Power (dBm) | Limit (dBm) | Result |
|---------|-----------------|------------------|---------------------|---------------------|-----------------------|-------------|--------|
| 149     | 5745            | HT0              | 26.13               | 24.79               | 28.52                 | <30dBm      | Pass   |
| 157     | 5785            | HT0              | 26.15               | 24.83               | 28.55                 | <30dBm      | Pass   |
| 165     | 5825            | HT0              | 26.06               | 24.72               | 28.45                 | <30dBm      | Pass   |

Note: Power Output Value (dBm) = 10\*LOG (Chain A (mW)+ Chain B (mW))

Product : 802.11 ac PCIe Module  
Test Item : Maximum Conducted Power  
Test Site : No.3 OATS  
Test Mode : Mode 15: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Panel Antenna)

#### CHAIN A

| Channel No | Frequency<br>(MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | HT0                                             | HT1   | HT2   | HT3   | HT4   | HT5   | HT6   | HT7   |                   |        |
|            |                    | Measurement Level (dBm)                         |       |       |       |       |       |       |       |                   |        |
| 151        | 5755               | 26.22                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |
| 159        | 5795               | 26.39                                           | 26.27 | 26.11 | 26.04 | 25.91 | 25.77 | 25.57 | 25.41 | <30dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN B

| Channel No | Frequency<br>(MHz) | Average Power                  |       |       |       |      |       |       |       | Required<br>Limit | Result |
|------------|--------------------|--------------------------------|-------|-------|-------|------|-------|-------|-------|-------------------|--------|
|            |                    | For different Data Rate (Mbps) |       |       |       |      |       |       |       |                   |        |
|            |                    | HT0                            | HT1   | HT2   | HT3   | HT4  | HT5   | HT6   | HT7   |                   |        |
|            |                    | Measurement Level (dBm)        |       |       |       |      |       |       |       |                   |        |
| 151        | 5755               | 24.76                          | -     | -     | -     | -    | -     | -     | -     | <30dBm            | Pass   |
| 159        | 5795               | 25.39                          | 26.01 | 25.74 | 25.32 | 25.1 | 24.69 | 24.24 | 23.89 | <30dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN A+B

| Channel | Frequency (MHz) | Data Rate (Mbps) | Chain A Power (dBm) | Chain B Power (dBm) | Chain A+B Power (dBm) | Limit (dBm) | Result |
|---------|-----------------|------------------|---------------------|---------------------|-----------------------|-------------|--------|
| 151     | 5755            | HT0              | 26.22               | 24.76               | 28.56                 | <30dBm      | Pass   |
| 159     | 5795            | HT0              | 26.39               | 25.39               | 28.93                 | <30dBm      | Pass   |

Note: Power Output Value (dBm) = 10\*LOG (Chain A (mW)+ Chain B (mW))

Product : 802.11 ac PCIe Module  
Test Item : Peak Power Output Data  
Test Site : No.3 OATS  
Test Mode : Mode 16: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Panel Antenna)

#### CHAIN A

| Channel No              | Frequency (MHz) | Average Power                  |       |       |       |      |       |       |       |       |       | Required Limit | Result |
|-------------------------|-----------------|--------------------------------|-------|-------|-------|------|-------|-------|-------|-------|-------|----------------|--------|
|                         |                 | For different Data Rate (Mbps) |       |       |       |      |       |       |       |       |       |                |        |
|                         |                 | VHT0                           | VHT1  | VHT2  | VHT3  | VHT4 | VHT5  | VHT6  | VHT7  | VHT8  | VHT9  |                |        |
| Measurement Level (dBm) |                 |                                |       |       |       |      |       |       |       |       |       |                |        |
| 1                       | 5780            | 26.30                          | 26.28 | 26.24 | 26.22 | 26.2 | 26.15 | 26.12 | 26.04 | 25.94 | 25.87 | <30dBm         | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN B

| Channel No | Frequency (MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |      |       |       |       |       | Required Limit | Result |
|------------|-----------------|-------------------------------------------------|-------|-------|-------|-------|------|-------|-------|-------|-------|----------------|--------|
|            |                 | VHT0                                            | VHT1  | VHT2  | VHT3  | VHT4  | VHT5 | VHT6  | VHT7  | VHT8  | VHT9  |                |        |
|            |                 | Measurement Level (dBm)                         |       |       |       |       |      |       |       |       |       |                |        |
| 1          | 5780            | 25.91                                           | 25.86 | 25.82 | 25.79 | 26.75 | 25.7 | 25.67 | 25.64 | 25.59 | 25.55 | <30dBm         | Pass   |


Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN A+B


| Channel | Frequency (MHz) | Data Rate (Mbps) | Chain A Power (dBm) | Chain B Power (dBm) | Chain A+B Power (dBm) | Limit (dBm) | Result |
|---------|-----------------|------------------|---------------------|---------------------|-----------------------|-------------|--------|
| 1       | 5780            | VHT0             | 26.30               | 25.91               | 29.12                 | <30dBm      | Pass   |

Note: Power Output Value (dBm) = 10\*LOG (Chain A (mW)+ Chain B (mW))

**Figure Channel 156: CHAIN A**

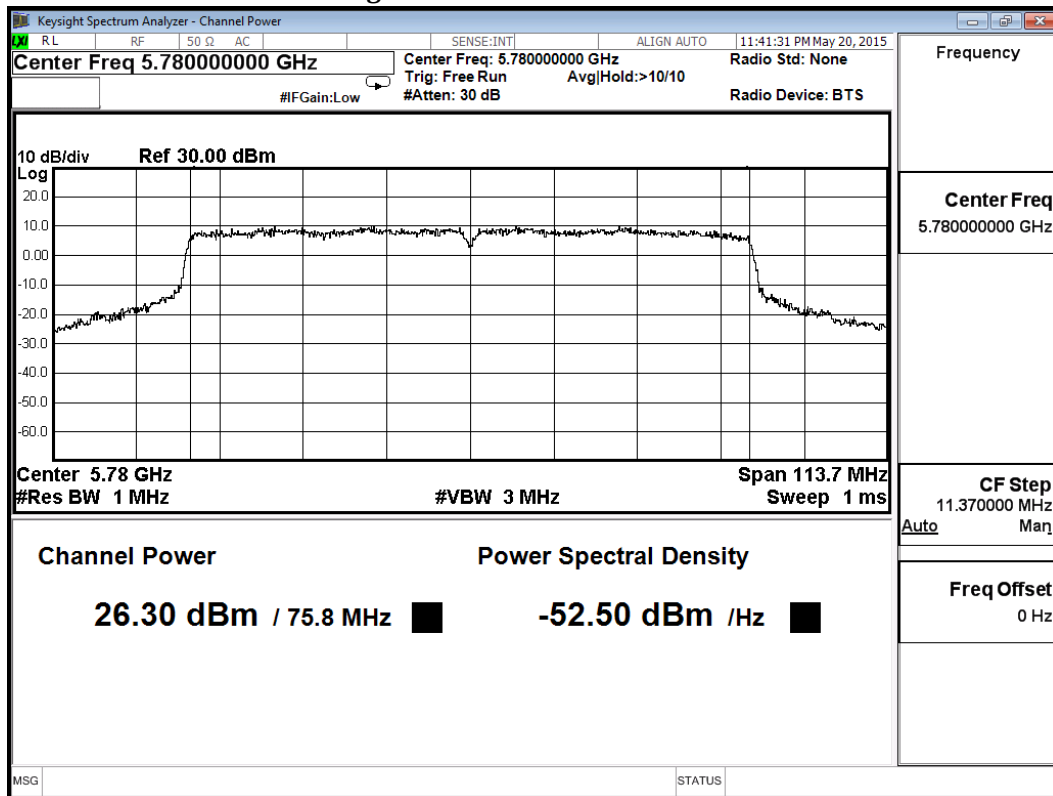

**Figure Channel 156: CHAIN B**

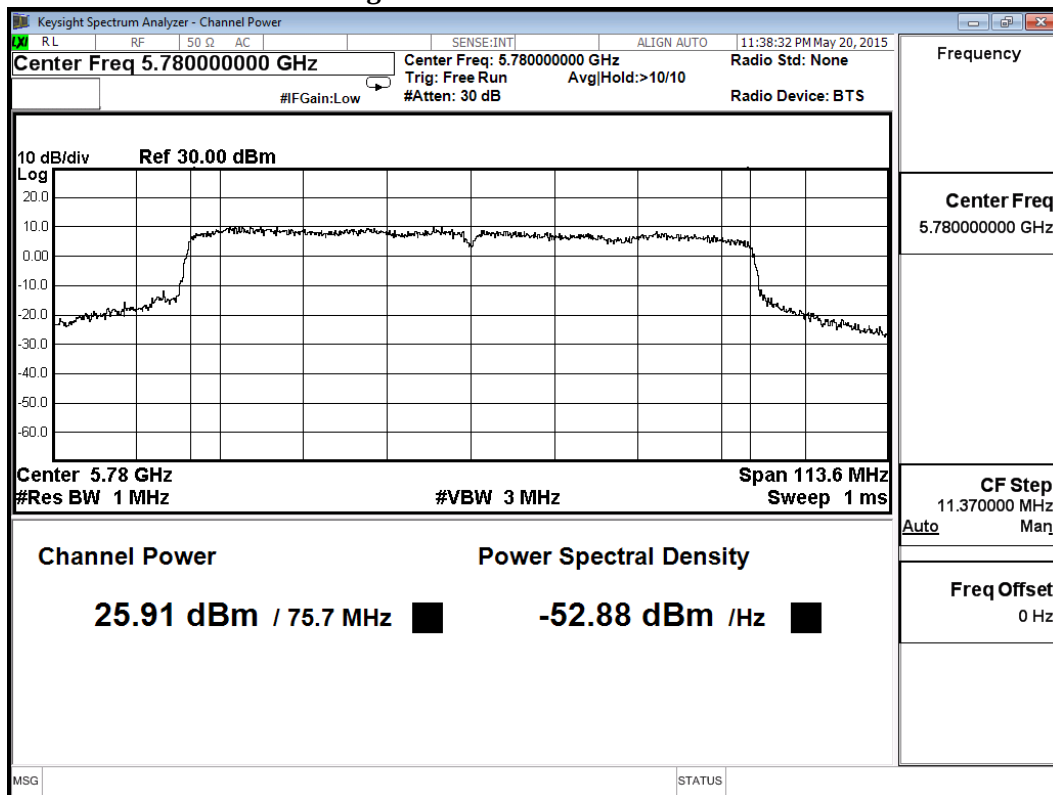

Product : 802.11 ac PCIe Module  
Test Item : Maximum Conducted Power  
Test Site : No.3 OATS  
Test Mode : Mode 17: Transmit - 802.11a\_6Mbps(Sector Antenna)

#### CHAIN A

| Channel No | Frequency<br>(MHz) | Average Power<br>For different Data Rate (Mbps) |       |    |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|-------------------------------------------------|-------|----|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | 6                                               | 9     | 12 | 18    | 24    | 36    | 48    | 54    |                   |        |
|            |                    | Measurement Level (dBm)                         |       |    |       |       |       |       |       |                   |        |
| 149        | 5745               | 26.22                                           | -     | -  | -     | -     | -     | -     | -     | <30dBm            | Pass   |
| 157        | 5785               | 26.31                                           | 26.12 | 26 | 25.84 | 25.67 | 25.52 | 25.44 | 25.37 | <30dBm            | Pass   |
| 165        | 5825               | 26.21                                           | -     | -  | -     | -     | -     | -     | -     | <30dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN B

| Channel No | Frequency<br>(MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | 6                                               | 9     | 12    | 18    | 24    | 36    | 48    | 54    |                   |        |
|            |                    | Measurement Level (dBm)                         |       |       |       |       |       |       |       |                   |        |
| 149        | 5745               | 24.89                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |
| 157        | 5785               | 24.94                                           | 24.82 | 24.76 | 24.62 | 24.47 | 24.23 | 24.14 | 23.95 | <30dBm            | Pass   |
| 165        | 5825               | 24.87                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN A+B

| Channel | Frequency<br>(MHz) | Data Rate<br>(Mbps) | Chain A<br>Power<br>(dBm) | Chain B<br>Power<br>(dBm) | Chain A+B<br>Power<br>(dBm) | Limit<br>(dBm) | Result |
|---------|--------------------|---------------------|---------------------------|---------------------------|-----------------------------|----------------|--------|
| 149     | 5745               | 6                   | 26.22                     | 24.89                     | 28.62                       | <30dBm         | Pass   |
| 157     | 5785               | 6                   | 26.31                     | 24.94                     | 28.69                       | <30dBm         | Pass   |
| 165     | 5825               | 6                   | 26.21                     | 24.87                     | 28.60                       | <30dBm         | Pass   |

Note: Power Output Value (dBm) = 10\*LOG (Chain A (mW)+ Chain B (mW))

Product : 802.11 ac PCIE Module  
Test Item : Maximum Conducted Power  
Test Site : No.3 OATS  
Test Mode : Mode 18: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Sector Antenna)

#### CHAIN A

| Channel No | Frequency<br>(MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | HT0                                             | HT1   | HT2   | HT3   | HT4   | HT5   | HT6   | HT7   |                   |        |
|            |                    | Measurement Level (dBm)                         |       |       |       |       |       |       |       |                   |        |
| 149        | 5745               | 26.13                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |
| 157        | 5785               | 26.15                                           | 26.01 | 25.88 | 25.69 | 25.54 | 25.41 | 25.28 | 25.19 | <30dBm            | Pass   |
| 165        | 5825               | 26.06                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN B

| Channel No              | Frequency<br>(MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |       |       |       | Required<br>Limit | Result |
|-------------------------|--------------------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------------------|--------|
|                         |                    | HT0                                             | HT1   | HT2   | HT3   | HT4   | HT5   | HT6   | HT7   |                   |        |
|                         |                    |                                                 |       |       |       |       |       |       |       |                   |        |
|                         |                    |                                                 |       |       |       |       |       |       |       |                   |        |
| Measurement Level (dBm) |                    |                                                 |       |       |       |       |       |       |       |                   |        |
| 149                     | 5745               | 24.79                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |
| 157                     | 5785               | 24.83                                           | 24.69 | 24.57 | 24.48 | 24.37 | 24.22 | 24.16 | 24.04 | <30dBm            | Pass   |
| 165                     | 5825               | 24.72                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN A+B

| Channel | Frequency (MHz) | Data Rate (Mbps) | Chain A Power (dBm) | Chain B Power (dBm) | Chain A+B Power (dBm) | Limit (dBm) | Result |
|---------|-----------------|------------------|---------------------|---------------------|-----------------------|-------------|--------|
| 149     | 5745            | HT0              | 26.13               | 24.79               | 28.52                 | <30dBm      | Pass   |
| 157     | 5785            | HT0              | 26.15               | 24.83               | 28.55                 | <30dBm      | Pass   |
| 165     | 5825            | HT0              | 26.06               | 24.72               | 28.45                 | <30dBm      | Pass   |

Note: Power Output Value (dBm) = 10\*LOG (Chain A (mW)+ Chain B (mW))

Product : 802.11 ac PCIe Module  
Test Item : Maximum Conducted Power  
Test Site : No.3 OATS  
Test Mode : Mode 19: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Sector Antenna)

#### CHAIN A

| Channel No | Frequency<br>(MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |       |       |       | Required<br>Limit | Result |
|------------|--------------------|-------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------------------|--------|
|            |                    | HT0                                             | HT1   | HT2   | HT3   | HT4   | HT5   | HT6   | HT7   |                   |        |
|            |                    | Measurement Level (dBm)                         |       |       |       |       |       |       |       |                   |        |
| 151        | 5755               | 26.22                                           | -     | -     | -     | -     | -     | -     | -     | <30dBm            | Pass   |
| 159        | 5795               | 26.39                                           | 26.27 | 26.11 | 26.04 | 25.91 | 25.77 | 25.57 | 25.41 | <30dBm            | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN B

| Channel No | Frequency (MHz) | Average Power                  |       |       |       |      |       |       |       | Required Limit | Result |
|------------|-----------------|--------------------------------|-------|-------|-------|------|-------|-------|-------|----------------|--------|
|            |                 | For different Data Rate (Mbps) |       |       |       |      |       |       |       |                |        |
|            |                 | HT0                            | HT1   | HT2   | HT3   | HT4  | HT5   | HT6   | HT7   |                |        |
|            |                 | Measurement Level (dBm)        |       |       |       |      |       |       |       |                |        |
| 151        | 5755            | 24.76                          | -     | -     | -     | -    | -     | -     | -     | <30dBm         | Pass   |
| 159        | 5795            | 25.39                          | 26.01 | 25.74 | 25.32 | 25.1 | 24.69 | 24.24 | 23.89 | <30dBm         | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN A+B

| Channel | Frequency (MHz) | Data Rate (Mbps) | Chain A Power (dBm) | Chain B Power (dBm) | Chain A+B Power (dBm) | Limit (dBm) | Result |
|---------|-----------------|------------------|---------------------|---------------------|-----------------------|-------------|--------|
| 151     | 5755            | HT0              | 26.22               | 24.76               | 28.56                 | <30dBm      | Pass   |
| 159     | 5795            | HT0              | 26.39               | 25.39               | 28.93                 | <30dBm      | Pass   |

Note: Power Output Value (dBm) = 10\*LOG (Chain A (mW)+ Chain B (mW))

Product : 802.11 ac PCIe Module  
Test Item : Peak Power Output Data  
Test Site : No.3 OATS  
Test Mode : Mode 20: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Sector Antenna)

#### CHAIN A

| Channel No | Frequency (MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |      |       |       |       |       |       | Required Limit | Result |
|------------|-----------------|-------------------------------------------------|-------|-------|-------|------|-------|-------|-------|-------|-------|----------------|--------|
|            |                 | VHT0                                            | VHT1  | VHT2  | VHT3  | VHT4 | VHT5  | VHT6  | VHT7  | VHT8  | VHT9  |                |        |
|            |                 | Measurement Level (dBm)                         |       |       |       |      |       |       |       |       |       |                |        |
| 1          | 5780            | 26.30                                           | 26.28 | 26.24 | 26.22 | 26.2 | 26.15 | 26.12 | 26.04 | 25.94 | 25.87 | <30dBm         | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN B

| Channel No | Frequency (MHz) | Average Power<br>For different Data Rate (Mbps) |       |       |       |       |      |       |       |       |       | Required Limit | Result |
|------------|-----------------|-------------------------------------------------|-------|-------|-------|-------|------|-------|-------|-------|-------|----------------|--------|
|            |                 | VHT0                                            | VHT1  | VHT2  | VHT3  | VHT4  | VHT5 | VHT6  | VHT7  | VHT8  | VHT9  |                |        |
|            |                 | Measurement Level (dBm)                         |       |       |       |       |      |       |       |       |       |                |        |
| 1          | 5780            | 25.91                                           | 25.86 | 25.82 | 25.79 | 26.75 | 25.7 | 25.67 | 25.64 | 25.59 | 25.55 | <30dBm         | Pass   |

Note: Peak Power Output Value =Reading value on power meter + cable loss

#### CHAIN A+B

| Channel | Frequency (MHz) | Data Rate (Mbps) | Chain A Power (dBm) | Chain B Power (dBm) | Chain A+B Power (dBm) | Limit (dBm) | Result |
|---------|-----------------|------------------|---------------------|---------------------|-----------------------|-------------|--------|
| 1       | 5780            | VHT0             | 26.30               | 25.91               | 29.12                 | <30dBm      | Pass   |

Note: Power Output Value (dBm) = 10\*LOG (Chain A (mW)+ Chain B (mW))

Figure Channel 156: CHAIN A


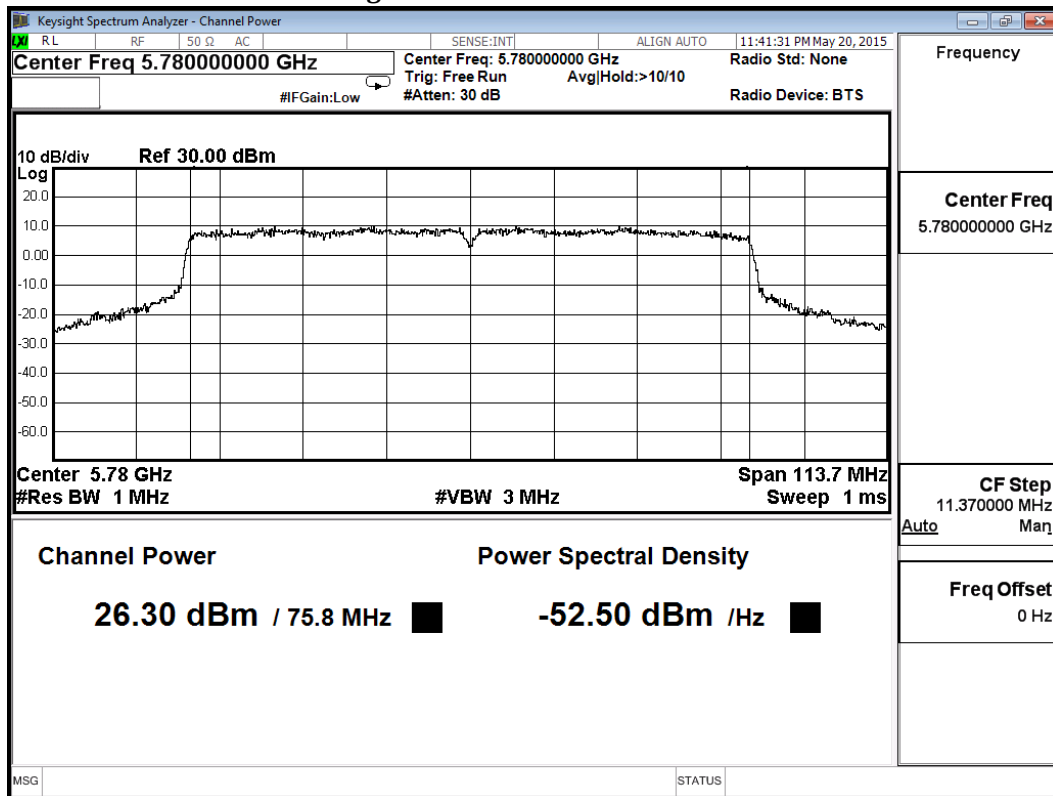


Figure Channel 156: CHAIN B

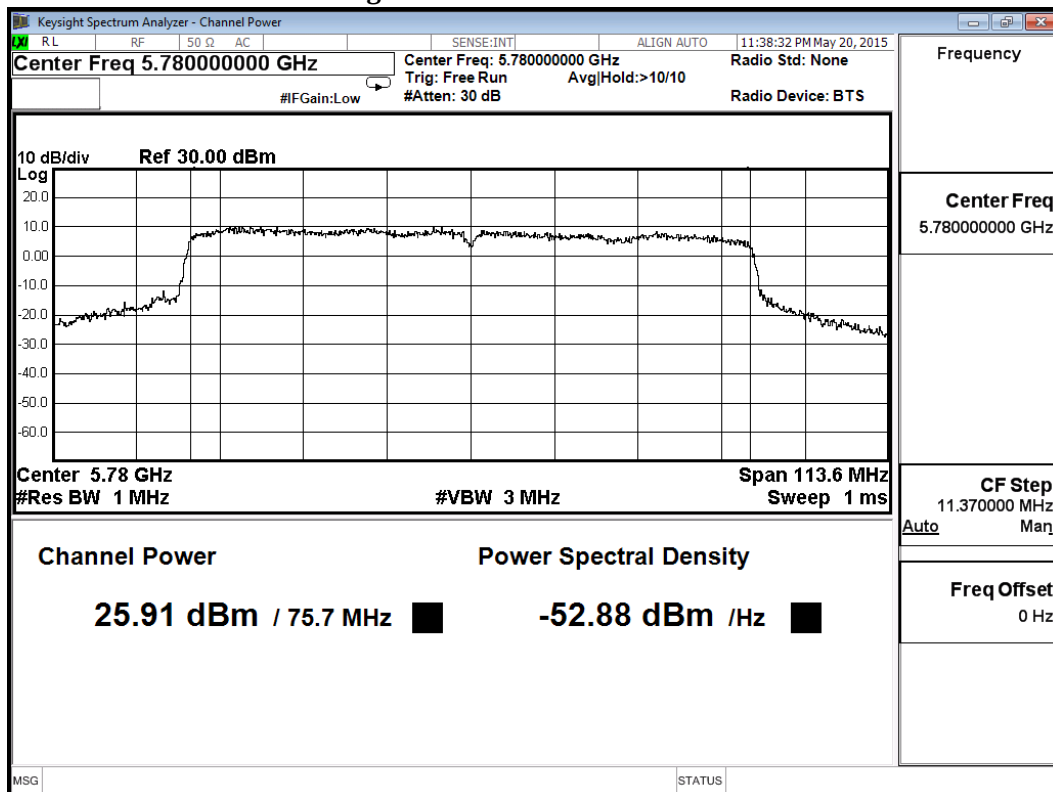

#### 4. Radiated Emission

##### 4.1. Test Equipment

The following test equipment are used during the radiated emission test:


| Test Site                                    |   | Equipment         | Manufacturer    | Model No./Serial No.        | Last Cal.  |
|----------------------------------------------|---|-------------------|-----------------|-----------------------------|------------|
| <input checked="" type="checkbox"/> Site # 3 | X | Loop Antenna      | Teseq           | HLA6120 / 26739             | Jul., 2014 |
|                                              | X | Bilog Antenna     | Schaffner Chase | CBL6112B/2673               | Sep., 2014 |
|                                              | X | Horn Antenna      | Schwarzbeck     | BBHA9120D/D305              | Sep., 2014 |
|                                              | X | Horn Antenna      | Schwarzbeck     | BBHA9170/208                | Jul., 2014 |
|                                              | X | Pre-Amplifier     | QTK             | QTK-AMP-03 / 0003           | May, 2015  |
|                                              | X | Pre-Amplifier     | QTK             | AP-180C / CHM_0906076       | Sep., 2014 |
|                                              | X | Pre-Amplifier     | MITEQ           | AMF-4D-180400-45-6P/ 925975 | Mar, 2015  |
|                                              | X | Spectrum Analyzer | Agilent         | E4407B / US39440758         | May, 2015  |
|                                              | X | Test Receiver     | R & S           | ESCS 30/ 825442/018         | Sep., 2014 |
|                                              | X | Coaxial Cable     | QuieTek         | QTK-CABLE/ CAB5             | Feb., 2015 |
|                                              | X | Controller        | QuieTek         | QTK-CONTROLLER/ CTRL3       | N/A        |
|                                              | X | Coaxial Switch    | Anritsu         | MP59B/6200265729            | N/A        |

| Test Site                                  |   | Equipment         | Manufacturer | Model No./Serial No.        | Last Cal. |
|--------------------------------------------|---|-------------------|--------------|-----------------------------|-----------|
| <input checked="" type="checkbox"/> CB # 8 | X | Spectrum Analyzer | R&S          | FSP40/ 100339               | Oct, 2014 |
|                                            | X | Horn Antenna      | ETS-Lindgren | 3117/ 35205                 | Mar, 2015 |
|                                            | X | Horn Antenna      | Schwarzbeck  | BBHA9170/209                | Jan, 2015 |
|                                            | X | Horn Antenna      | TRC          | AH-0801/95051               | Aug, 2014 |
|                                            | X | Pre-Amplifier     | EMCI         | EMC012630SE/980210          | Jan, 2015 |
|                                            | X | Pre-Amplifier     | MITEQ        | JS41-001040000-58-5P/153945 | Jul, 2014 |
|                                            | X | Pre-Amplifier     | NARDA        | DBL-1840N506/013            | Jul, 2014 |


- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
  2. The test instruments marked with "X" are used to measure the final test results.

## 4.2. Test Setup

### Radiated Emission Below 1GHz

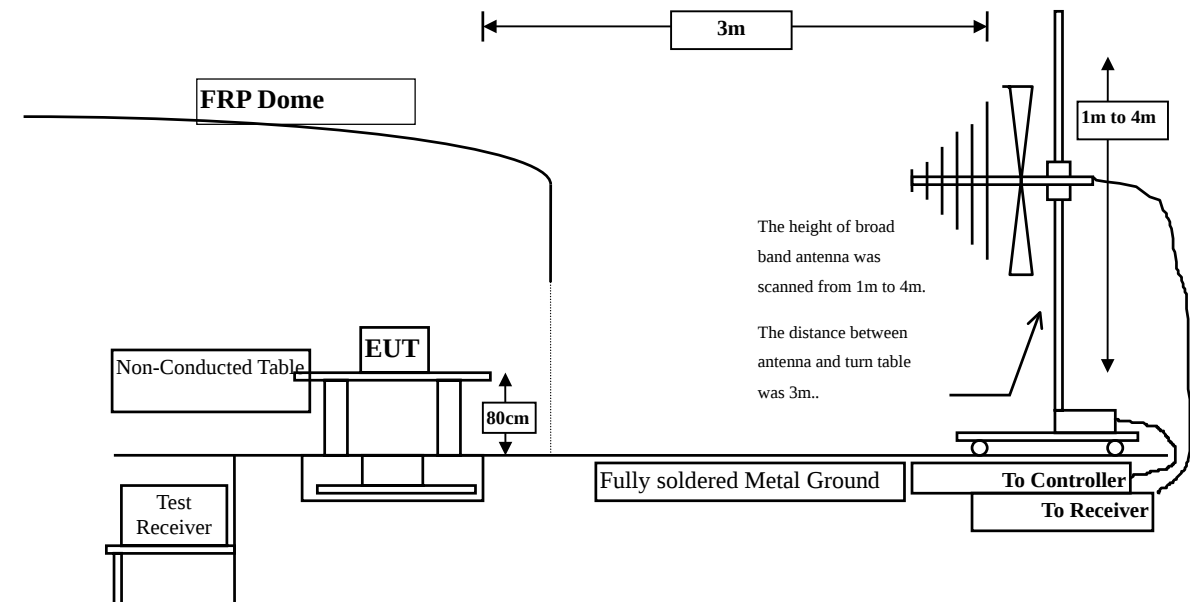

### Radiated Emission Above 1GHz

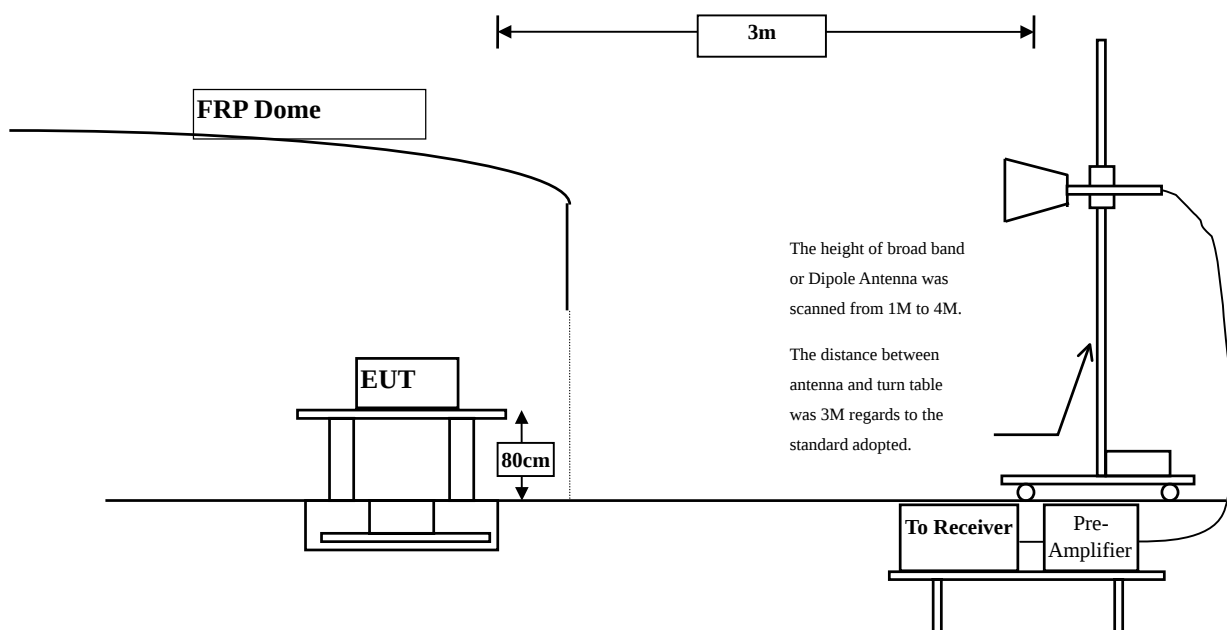

### 4.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 30dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

| <b>FCC Part 15 Subpart C Paragraph 15.209(a) Limits</b> |                                      |                                 |
|---------------------------------------------------------|--------------------------------------|---------------------------------|
| Frequency<br>MHz                                        | Field strength<br>(microvolts/meter) | Measurement distance<br>(meter) |
| 0.009-0.490                                             | 2400/F(kHz)                          | 300                             |
| 0.490-1.705                                             | 24000/F(kHz)                         | 30                              |
| 1.705-30                                                | 30                                   | 30                              |
| 30-88                                                   | 100                                  | 3                               |
| 88-216                                                  | 150                                  | 3                               |
| 216-960                                                 | 200                                  | 3                               |
| Above 960                                               | 500                                  | 3                               |

Remarks: E field strength (dBuV/m) = 20 log E field strength (uV/m)

#### 4.4. Test Procedure

The EUT was setup according to ANSI C63.10: 2009 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2009 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9KHz - 10th Harmonic of fundamental was investigated.

#### 4.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

#### 4.6. Test Result of Radiated Emission

Product : 802.11 ac PCIe Module  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 802.11a\_6Mbps(Dipole Antenna) (5745 MHz)

| Frequency<br>MHz             | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|------------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b>            |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 11490.000                    | 14.326                  | 39.524                   | 53.849                         | -20.151      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| --                           |                         |                          |                                |              |                 |
| <b>Vertical</b>              |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 11490.000                    | 15.842                  | 45.574                   | 61.415                         | -12.585      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 11490.000                    | 15.842                  | 31.758                   | 47.599                         | -6.401       | 54.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit - 802.11a\_6Mbps(Dipole Antenna) (5785 MHz)

| Frequency             | Correct | Reading | Measurement | Margin  | Limit  |
|-----------------------|---------|---------|-------------|---------|--------|
| MHz                   | Factor  | Level   | Level       |         |        |
|                       | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b>     |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 11570.000             | 14.849  | 39.010  | 53.859      | -20.141 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| --                    |         |         |             |         |        |
| <b>Vertical</b>       |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 11570.000             | 16.215  | 46.944  | 63.158      | -10.842 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 11570.000             | 16.215  | 33.112  | 49.326      | -4.674  | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit - 802.11a\_6Mbps(Dipole Antenna) (5825 MHz)

| Frequency             | Correct | Reading | Measurement | Margin  | Limit  |
|-----------------------|---------|---------|-------------|---------|--------|
| MHz                   | Factor  | Level   | Level       |         |        |
|                       | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b>     |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 11650.000             | 13.179  | 39.593  | 52.772      | -21.228 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| --                    |         |         |             |         |        |
| <b>Vertical</b>       |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 11650.000             | 14.634  | 45.329  | 59.963      | -14.037 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 11650.000             | 14.634  | 30.290  | 44.924      | -9.076  | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Dipole Antenna)  
(5745MHz)

| Frequency             | Correct | Reading | Measurement | Margin  | Limit  |
|-----------------------|---------|---------|-------------|---------|--------|
| MHz                   | Factor  | Level   | Level       |         |        |
|                       | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b>     |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 11490.000             | 14.326  | 38.891  | 53.216      | -20.784 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| --                    |         |         |             |         |        |
| <b>Vertical</b>       |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 11490.000             | 15.842  | 46.913  | 62.754      | -11.246 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 11490.000             | 15.842  | 32.511  | 48.352      | -5.648  | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Dipole Antenna)  
(5785 MHz)

| Frequency<br>MHz      | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|-----------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b>     |                         |                          |                                |              |                 |
| <b>Peak Detector:</b> |                         |                          |                                |              |                 |
| 11570.000             | 14.849                  | 38.601                   | 53.450                         | -20.550      | 74.000          |
| <b>Average</b>        |                         |                          |                                |              |                 |
| <b>Detector:</b>      |                         |                          |                                |              |                 |
| --                    |                         |                          |                                |              |                 |
| <b>Vertical</b>       |                         |                          |                                |              |                 |
| <b>Peak Detector:</b> |                         |                          |                                |              |                 |
| 11570.000             | 16.215                  | 48.703                   | 64.917                         | -9.083       | 74.000          |
| <b>Average</b>        |                         |                          |                                |              |                 |
| <b>Detector:</b>      |                         |                          |                                |              |                 |
| 11570.000             | 16.215                  | 33.934                   | 50.148                         | -3.852       | 54.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCie Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Dipole Antenna)  
(5825 MHz)

| Frequency             | Correct | Reading | Measurement | Margin  | Limit  |
|-----------------------|---------|---------|-------------|---------|--------|
| MHz                   | Factor  | Level   | Level       | dB      | dBuV/m |
|                       | dB      | dBuV    | dBuV/m      |         |        |
| <b>Horizontal</b>     |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 11650.000             | 13.179  | 39.947  | 53.126      | -20.874 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| --                    |         |         |             |         |        |
| <b>Vertical</b>       |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 11650.000             | 14.634  | 43.408  | 58.042      | -15.958 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 11650.000             | 14.634  | 30.521  | 45.155      | -8.845  | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Dipole Antenna)  
(5755MHz)

| Frequency<br>MHz             | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|------------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b>            |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 11510.000                    | 14.402                  | 39.288                   | 53.690                         | -20.310      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| --                           |                         |                          |                                |              |                 |
| <b>Vertical</b>              |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 11510.000                    | 15.894                  | 44.222                   | 60.116                         | -13.884      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 11510.000                    | 15.894                  | 28.747                   | 44.641                         | -9.359       | 54.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Dipole Antenna)  
(5795 MHz)

| Frequency<br>MHz             | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|------------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b>            |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 11590.000                    | 15.138                  | 38.203                   | 53.341                         | -20.659      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| --                           |                         |                          |                                |              |                 |
| <b>Vertical</b>              |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 11590.000                    | 16.461                  | 43.017                   | 59.478                         | -14.522      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 11590.000                    | 16.461                  | 29.508                   | 45.969                         | -8.031       | 54.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Dipole Antenna)  
(5780 MHz)

| Frequency<br>MHz             | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|------------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b>            |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 11560.000                    | 14.701                  | 39.031                   | 53.732                         | -20.268      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| --                           |                         |                          |                                |              |                 |
| <b>Vertical</b>              |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 11560.000                    | 16.088                  | 36.978                   | 53.066                         | -20.934      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| --                           |                         |                          |                                |              |                 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 5: Transmit - 802.11a\_6Mbps(Grid DISH Antenna) (5745 MHz)

| Frequency             | Correct | Reading | Measurement | Margin  | Limit  |
|-----------------------|---------|---------|-------------|---------|--------|
| MHz                   | Factor  | Level   | Level       |         |        |
|                       | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b>     |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 6128.000              | 5.416   | 59.820  | 65.236      | -8.764  | 74.000 |
| 11490.000             | 14.326  | 51.610  | 65.935      | -8.065  | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 6128.000              | 5.416   | 47.040  | 52.456      | -1.544  | 54.000 |
| 11490.000             | 14.326  | 38.490  | 52.815      | -1.185  | 54.000 |
| <b>Vertical</b>       |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 6076.000              | 3.779   | 59.110  | 62.889      | -11.111 | 74.000 |
| 11490.000             | 15.842  | 52.910  | 68.751      | -5.249  | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 6076.000              | 3.779   | 46.170  | 49.949      | -4.051  | 54.000 |
| 11490.000             | 15.842  | 36.890  | 52.731      | -1.269  | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 5: Transmit - 802.11a\_6Mbps(Grid DISH Antenna) (5785 MHz)

| Frequency             | Correct | Reading | Measurement | Margin  | Limit  |
|-----------------------|---------|---------|-------------|---------|--------|
| MHz                   | Factor  | Level   | Level       |         |        |
|                       | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b>     |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 6110.000              | 5.500   | 64.490  | 69.989      | -4.011  | 74.000 |
| 11570.000             | 14.849  | 48.520  | 63.369      | -10.631 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 6110.000              | 5.500   | 47.410  | 52.909      | -1.091  | 54.000 |
| 11570.000             | 14.849  | 35.530  | 50.379      | -3.621  | 54.000 |
| <b>Vertical</b>       |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 6150.000              | 4.290   | 61.150  | 65.440      | -8.560  | 74.000 |
| 11570.000             | 16.215  | 49.750  | 65.964      | -8.036  | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 6150.000              | 4.290   | 47.770  | 52.060      | -1.940  | 54.000 |
| 11570.000             | 16.215  | 36.290  | 52.504      | -1.496  | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 5: Transmit - 802.11a\_6Mbps(Grid DISH Antenna) (5825 MHz)

| Frequency             | Correct | Reading | Measurement | Margin  | Limit  |
|-----------------------|---------|---------|-------------|---------|--------|
| MHz                   | Factor  | Level   | Level       |         |        |
|                       | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b>     |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 6150.000              | 5.313   | 66.080  | 71.393      | -2.607  | 74.000 |
| 11650.000             | 13.179  | 50.420  | 63.599      | -10.401 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 6150.000              | 5.313   | 47.720  | 53.033      | -0.967  | 54.000 |
| 11650.000             | 13.179  | 36.020  | 49.199      | -4.801  | 54.000 |
| <b>Vertical</b>       |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 6150.000              | 4.290   | 64.180  | 68.470      | -5.530  | 74.000 |
| 11650.000             | 14.634  | 51.750  | 66.384      | -7.616  | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 6150.000              | 4.290   | 47.850  | 52.140      | -1.860  | 54.000 |
| 11650.000             | 14.634  | 37.870  | 52.504      | -1.496  | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIE Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 6: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Grid DISH Antenna)  
(5745MHz)

| Frequency             | Correct | Reading | Measurement | Margin  | Limit  |
|-----------------------|---------|---------|-------------|---------|--------|
| MHz                   | Factor  | Level   | Level       |         |        |
|                       | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b>     |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 6097.000              | 5.534   | 58.350  | 63.884      | -10.116 | 74.000 |
| 11490.000             | 14.326  | 48.990  | 63.315      | -10.685 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 6080.000              | 5.466   | 43.420  | 48.886      | -5.114  | 54.000 |
| 11570.000             | 14.849  | 38.060  | 52.909      | -1.091  | 54.000 |
| <b>Vertical</b>       |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 6072.000              | 3.762   | 61.890  | 65.651      | -8.349  | 74.000 |
| 11490.000             | 15.842  | 51.050  | 66.891      | -7.109  | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 6128.000              | 4.112   | 48.680  | 52.792      | -1.208  | 54.000 |
| 11490.000             | 15.842  | 36.780  | 52.621      | -1.379  | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 6: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Grid DISH Antenna)  
(5785 MHz)

| Frequency<br>MHz             | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|------------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b>            |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6096.000                     | 5.530                   | 61.980                   | 67.510                         | -6.490       | 74.000          |
| 11570.000                    | 14.849                  | 50.570                   | 65.419                         | -8.581       | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6097.000                     | 5.534                   | 47.360                   | 52.894                         | -1.106       | 54.000          |
| 11570.000                    | 14.849                  | 34.750                   | 49.599                         | -4.401       | 54.000          |
| <b>Vertical</b>              |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6110.000                     | 3.965                   | 60.820                   | 64.785                         | -9.215       | 74.000          |
| 11570.000                    | 16.215                  | 51.730                   | 67.944                         | -6.056       | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6110.000                     | 3.965                   | 47.870                   | 51.835                         | -2.165       | 54.000          |
| 11570.000                    | 16.215                  | 36.240                   | 52.454                         | -1.546       | 54.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIE Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 6: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Grid DISH Antenna)  
(5825 MHz)

| Frequency             | Correct | Reading | Measurement | Margin | Limit  |
|-----------------------|---------|---------|-------------|--------|--------|
| MHz                   | Factor  | Level   | Level       | dB     | dBuV/m |
| <b>Horizontal</b>     |         |         |             |        |        |
| <b>Peak Detector:</b> |         |         |             |        |        |
| 6151.000              | 5.309   | 64.230  | 69.539      | -4.461 | 74.000 |
| 11650.000             | 13.179  | 51.270  | 64.449      | -9.551 | 74.000 |
| <b>Average</b>        |         |         |             |        |        |
| <b>Detector:</b>      |         |         |             |        |        |
| 6151.000              | 5.309   | 47.709  | 53.018      | -0.982 | 54.000 |
| 11650.000             | 13.179  | 35.440  | 48.619      | -5.381 | 54.000 |
| <b>Vertical</b>       |         |         |             |        |        |
| <b>Peak Detector:</b> |         |         |             |        |        |
| 6150.000              | 4.290   | 62.550  | 66.840      | -7.160 | 74.000 |
| 11650.000             | 14.634  | 52.720  | 67.354      | -6.646 | 74.000 |
| <b>Average</b>        |         |         |             |        |        |
| <b>Detector:</b>      |         |         |             |        |        |
| 6150.000              | 4.290   | 48.650  | 52.940      | -1.060 | 54.000 |
| 11650.000             | 14.634  | 37.770  | 52.404      | -1.596 | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 7: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Grid DISH Antenna)  
(5755MHz)

| Frequency<br>MHz             | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|------------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b>            |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6090.000                     | 5.507                   | 62.460                   | 67.966                         | -6.034       | 74.000          |
| 11510.000                    | 14.402                  | 52.110                   | 66.512                         | -7.488       | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6090.000                     | 5.507                   | 47.400                   | 52.906                         | -1.094       | 54.000          |
| 11510.000                    | 14.402                  | 37.360                   | 51.762                         | -2.238       | 54.000          |
| <b>Vertical</b>              |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6071.000                     | 3.757                   | 62.280                   | 66.037                         | -7.963       | 74.000          |
| 11510.000                    | 15.894                  | 52.840                   | 68.734                         | -5.266       | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6071.000                     | 3.757                   | 49.282                   | 53.039                         | -0.961       | 54.000          |
| 11510.000                    | 15.894                  | 36.430                   | 52.324                         | -1.676       | 54.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 7: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Grid DISH Antenna)  
(5795 MHz)

| Frequency<br>MHz             | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|------------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b>            |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6097.000                     | 5.534                   | 64.200                   | 69.734                         | -4.266       | 74.000          |
| 11590.000                    | 15.138                  | 48.630                   | 63.768                         | -10.232      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6097.000                     | 5.534                   | 47.290                   | 52.824                         | -1.176       | 54.000          |
| 11590.000                    | 15.138                  | 33.940                   | 49.078                         | -4.922       | 54.000          |
| <b>Vertical</b>              |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6120.000                     | 4.047                   | 63.170                   | 67.217                         | -6.783       | 74.000          |
| 11590.000                    | 16.461                  | 50.410                   | 66.871                         | -7.129       | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6120.000                     | 4.047                   | 47.080                   | 51.127                         | -2.873       | 54.000          |
| 11590.000                    | 16.461                  | 36.210                   | 52.671                         | -1.329       | 54.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 8: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Grid DISH Antenna)  
(5780 MHz)

| Frequency<br>MHz             | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|------------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b>            |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6071.000                     | 5.428                   | 61.400                   | 66.829                         | -7.171       | 74.000          |
| 11560.000                    | 14.701                  | 49.190                   | 63.891                         | -10.109      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6071.000                     | 5.428                   | 46.380                   | 51.809                         | -2.191       | 54.000          |
| 11560.000                    | 14.701                  | 32.930                   | 47.631                         | -6.369       | 54.000          |
| <b>Vertical</b>              |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6153.000                     | 4.310                   | 65.190                   | 69.500                         | -4.500       | 74.000          |
| 11560.000                    | 16.088                  | 52.710                   | 68.798                         | -5.202       | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6153.000                     | 4.310                   | 48.760                   | 53.070                         | -0.930       | 54.000          |
| 11560.000                    | 16.088                  | 36.570                   | 52.658                         | -1.342       | 54.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 9: Transmit - 802.11a\_6Mbps(Omni Antenna) (5745 MHz)

| Frequency             | Correct | Reading | Measurement | Margin  | Limit  |
|-----------------------|---------|---------|-------------|---------|--------|
| MHz                   | Factor  | Level   | Level       |         |        |
|                       | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b>     |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 11490.000             | 14.326  | 38.290  | 52.615      | -21.385 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| --                    |         |         |             |         |        |
| <b>Vertical</b>       |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 11490.000             | 15.842  | 43.446  | 59.287      | -14.713 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 11490.000             | 15.842  | 28.905  | 44.746      | -9.254  | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 9: Transmit - 802.11a\_6Mbps(Omni Antenna) (5785 MHz)

| Frequency             | Correct | Reading | Measurement | Margin  | Limit  |
|-----------------------|---------|---------|-------------|---------|--------|
| MHz                   | Factor  | Level   | Level       |         |        |
|                       | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b>     |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 11570.000             | 14.849  | 38.290  | 53.139      | -20.861 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| --                    |         |         |             |         |        |
| <b>Vertical</b>       |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 11570.000             | 16.215  | 43.546  | 59.760      | -14.240 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 11570.000             | 16.215  | 29.008  | 45.222      | -8.778  | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 9: Transmit - 802.11a\_6Mbps(Omni Antenna) (5825 MHz)

| Frequency             | Correct | Reading | Measurement | Margin  | Limit  |
|-----------------------|---------|---------|-------------|---------|--------|
| MHz                   | Factor  | Level   | Level       |         |        |
|                       | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b>     |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 11650.000             | 13.179  | 38.696  | 51.875      | -22.125 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| --                    |         |         |             |         |        |
| <b>Vertical</b>       |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 11650.000             | 14.634  | 43.578  | 58.212      | -15.788 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 11650.000             | 14.634  | 28.590  | 43.224      | -10.776 | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIE Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 10: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Omni Antenna)  
(5745MHz)

| Frequency             | Correct | Reading | Measurement | Margin  | Limit  |
|-----------------------|---------|---------|-------------|---------|--------|
| MHz                   | Factor  | Level   | Level       |         |        |
|                       | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b>     |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 11490.000             | 14.326  | 38.274  | 52.599      | -21.401 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| --                    |         |         |             |         |        |
| <b>Vertical</b>       |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 11490.000             | 15.842  | 43.472  | 59.313      | -14.687 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 11490.000             | 15.842  | 28.423  | 44.264      | -9.736  | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 10: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Omni Antenna)  
 (5785 MHz)

| Frequency<br>MHz             | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|------------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b>            |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 11570.000                    | 14.849                  | 38.272                   | 53.121                         | -20.879      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| --                           |                         |                          |                                |              |                 |
| <b>Vertical</b>              |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 11570.000                    | 16.215                  | 43.318                   | 59.532                         | -14.468      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 11570.000                    | 16.215                  | 28.242                   | 44.456                         | -9.544       | 54.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 10: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Omni Antenna)  
(5825 MHz)

| Frequency             | Correct | Reading | Measurement | Margin  | Limit  |
|-----------------------|---------|---------|-------------|---------|--------|
| MHz                   | Factor  | Level   | Level       | dB      | dBuV/m |
|                       | dB      | dBuV    | dBuV/m      |         |        |
| <b>Horizontal</b>     |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 11650.000             | 13.179  | 37.899  | 51.078      | -22.922 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| --                    |         |         |             |         |        |
| <b>Vertical</b>       |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 11650.000             | 14.634  | 43.240  | 57.874      | -16.126 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 11650.000             | 14.634  | 28.219  | 42.853      | -11.147 | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 11: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Omni Antenna)  
(5755MHz)

| Frequency<br>MHz             | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|------------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b>            |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 11510.000                    | 15.894                  | 37.882                   | 53.776                         | -20.224      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| --                           |                         |                          |                                |              |                 |
| <b>Vertical</b>              |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 11510.000                    | 15.894                  | 42.177                   | 58.071                         | -15.929      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 11510.000                    | 15.894                  | 27.124                   | 43.018                         | -10.982      | 54.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 11: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Omni Antenna)  
(5795 MHz)

| Frequency<br>MHz      | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|-----------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b>     |                         |                          |                                |              |                 |
| <b>Peak Detector:</b> |                         |                          |                                |              |                 |
| 11590.000             | 15.138                  | 38.595                   | 53.733                         | -20.267      | 74.000          |
| <b>Average</b>        |                         |                          |                                |              |                 |
| <b>Detector:</b>      |                         |                          |                                |              |                 |
| --                    |                         |                          |                                |              |                 |
| <b>Vertical</b>       |                         |                          |                                |              |                 |
| <b>Peak Detector:</b> |                         |                          |                                |              |                 |
| 11590.000             | 16.461                  | 41.155                   | 57.616                         | -16.384      | 74.000          |
| <b>Average</b>        |                         |                          |                                |              |                 |
| <b>Detector:</b>      |                         |                          |                                |              |                 |
| 11590.000             | 16.461                  | 25.938                   | 42.399                         | -11.601      | 54.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 12: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Omni Antenna)  
(5780 MHz)

| Frequency<br>MHz             | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|------------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b>            |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 11560.000                    | 14.701                  | 37.770                   | 52.471                         | -21.529      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| --                           |                         |                          |                                |              |                 |
| <b>Vertical</b>              |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 11560.000                    | 16.088                  | 39.990                   | 56.078                         | -17.922      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 11560.000                    | 16.088                  | 25.030                   | 41.118                         | -12.882      | 54.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 13: Transmit - 802.11a\_6Mbps(Panel Antenna) (5745 MHz)

| Frequency<br>MHz             | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|------------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b>            |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6071.000                     | 5.428                   | 63.030                   | 68.459                         | -5.541       | 74.000          |
| 11490.000                    | 46.318                  | 42.930                   | 57.255                         | -16.745      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6071.000                     | 5.428                   | 47.600                   | 53.029                         | -0.971       | 54.000          |
| 11490.000                    | 14.326                  | 28.640                   | 42.965                         | -11.035      | 54.000          |
| <b>Vertical</b>              |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6072.000                     | 3.762                   | 64.630                   | 68.391                         | -5.609       | 74.000          |
| 11490.000                    | 15.842                  | 50.360                   | 66.201                         | -7.799       | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6072.000                     | 3.762                   | 49.190                   | 52.951                         | -1.049       | 54.000          |
| 11490.000                    | 15.842                  | 34.890                   | 50.731                         | -3.269       | 54.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 13: Transmit - 802.11a\_6Mbps(Panel Antenna) (5785 MHz)

| Frequency                | Correct | Reading | Measurement | Margin  | Limit  |
|--------------------------|---------|---------|-------------|---------|--------|
| MHz                      | Factor  | Level   | Level       |         |        |
|                          | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b>        |         |         |             |         |        |
| <b>Peak Detector:</b>    |         |         |             |         |        |
| 6094.000                 | 5.522   | 62.710  | 68.232      | -5.768  | 74.000 |
| 11570.000                | 14.849  | 51.680  | 66.529      | -7.471  | 74.000 |
| <b>Average Detector:</b> |         |         |             |         |        |
| 6094.000                 | 5.522   | 47.350  | 52.872      | -1.128  | 54.000 |
| 11570.000                | 14.849  | 36.780  | 51.629      | -2.371  | 54.000 |
| <b>Vertical</b>          |         |         |             |         |        |
| <b>Peak Detector:</b>    |         |         |             |         |        |
| 6110.000                 | 3.965   | 64.350  | 68.315      | -5.685  | 74.000 |
| 11570.000                | 16.215  | 46.980  | 63.194      | -10.806 | 74.000 |
| <b>Average Detector:</b> |         |         |             |         |        |
| 6110.000                 | 3.965   | 49.130  | 53.095      | -0.905  | 54.000 |
| 11570.000                | 16.215  | 32.170  | 48.384      | -5.616  | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 13: Transmit - 802.11a\_6Mbps(Panel Antenna) (5825 MHz)

| Frequency             | Correct | Reading | Measurement | Margin  | Limit  |
|-----------------------|---------|---------|-------------|---------|--------|
| MHz                   | Factor  | Level   | Level       |         |        |
|                       | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b>     |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 6149.000              | 5.319   | 64.070  | 69.388      | -4.612  | 74.000 |
| 11650.000             | 13.179  | 46.770  | 59.949      | -14.051 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 6149.000              | 5.319   | 47.490  | 52.808      | -1.192  | 54.000 |
| 11650.000             | 13.179  | 32.030  | 45.209      | -8.791  | 54.000 |
| <b>Vertical</b>       |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 6139.000              | 4.202   | 65.770  | 69.972      | -4.028  | 74.000 |
| 11650.000             | 14.634  | 44.690  | 59.324      | -14.676 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 6139.000              | 4.202   | 48.790  | 52.992      | -1.008  | 54.000 |
| 11650.000             | 14.634  | 30.870  | 45.504      | -8.496  | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIE Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 14: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Panel Antenna)  
(5745MHz)

| Frequency             | Correct | Reading | Measurement | Margin  | Limit  |
|-----------------------|---------|---------|-------------|---------|--------|
| MHz                   | Factor  | Level   | Level       |         |        |
|                       | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b>     |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 6071.000              | 5.428   | 61.730  | 67.159      | -6.841  | 74.000 |
| 11490.000             | 14.326  | 48.370  | 62.695      | -11.305 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 6071.000              | 5.428   | 47.430  | 52.859      | -1.141  | 54.000 |
| 11490.000             | 14.326  | 30.890  | 45.215      | -8.785  | 54.000 |
| <b>Vertical</b>       |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 6071.000              | 3.757   | 65.200  | 68.957      | -5.043  | 74.000 |
| 11490.000             | 15.842  | 47.890  | 63.731      | -10.269 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 6071.000              | 3.757   | 49.240  | 52.997      | -1.003  | 54.000 |
| 11490.000             | 15.842  | 33.720  | 49.561      | -4.439  | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 14: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Panel Antenna)  
(5785 MHz)

| Frequency<br>MHz             | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|------------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b>            |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6111.000                     | 5.494                   | 64.920                   | 70.415                         | -3.585       | 74.000          |
| 11570.000                    | 14.849                  | 49.550                   | 64.399                         | -9.601       | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6111.000                     | 5.494                   | 47.560                   | 53.055                         | -0.945       | 54.000          |
| 11570.000                    | 14.849                  | 38.270                   | 53.119                         | -0.881       | 54.000          |
| <b>Vertical</b>              |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6098.000                     | 3.875                   | 63.860                   | 67.735                         | -6.265       | 74.000          |
| 11570.000                    | 16.215                  | 45.860                   | 62.074                         | -11.926      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6098.000                     | 3.875                   | 48.850                   | 52.725                         | -1.275       | 54.000          |
| 11570.000                    | 16.215                  | 31.690                   | 47.904                         | -6.096       | 54.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 14: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Panel Antenna)  
(5825 MHz)

| Frequency             | Correct | Reading | Measurement | Margin  | Limit  |
|-----------------------|---------|---------|-------------|---------|--------|
| MHz                   | Factor  | Level   | Level       | dB      | dBuV/m |
| <b>Horizontal</b>     |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 6149.000              | 5.319   | 65.010  | 70.328      | -3.672  | 74.000 |
| 11650.000             | 13.179  | 45.150  | 58.329      | -15.671 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 6150.000              | 5.313   | 47.710  | 53.023      | -0.977  | 54.000 |
| 11650.000             | 13.179  | 30.510  | 43.689      | -10.311 | 54.000 |
| <b>Vertical</b>       |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 6139.000              | 4.202   | 63.700  | 67.902      | -6.098  | 74.000 |
| 11650.000             | 14.634  | 46.010  | 60.644      | -13.356 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 6139.000              | 4.202   | 48.570  | 52.772      | -1.228  | 54.000 |
| 11650.000             | 14.634  | 31.770  | 46.404      | -7.596  | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 15: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Panel Antenna)  
(5755MHz)

| Frequency<br>MHz             | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|------------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b>            |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6071.000                     | 5.428                   | 62.930                   | 68.359                         | -5.641       | 74.000          |
| 11510.000                    | 14.402                  | 48.510                   | 62.912                         | -11.088      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6071.000                     | 5.428                   | 47.420                   | 52.849                         | -1.151       | 54.000          |
| 11510.000                    | 14.402                  | 32.060                   | 46.462                         | -7.538       | 54.000          |
| <b>Vertical</b>              |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6083.000                     | 3.810                   | 64.310                   | 68.120                         | -5.880       | 74.000          |
| 11510.000                    | 15.894                  | 44.250                   | 60.144                         | -13.856      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6083.000                     | 3.810                   | 49.120                   | 52.930                         | -1.070       | 54.000          |
| 11510.000                    | 15.894                  | 29.960                   | 45.854                         | -8.146       | 54.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 15: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Panel Antenna)  
(5795 MHz)

| Frequency<br>MHz             | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|------------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b>            |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6129.000                     | 5.412                   | 62.450                   | 67.862                         | -6.138       | 74.000          |
| 11590.000                    | 15.138                  | 49.770                   | 64.908                         | -9.092       | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6129.000                     | 5.412                   | 47.350                   | 52.762                         | -1.238       | 54.000          |
| 11590.000                    | 15.138                  | 33.360                   | 48.498                         | -5.502       | 54.000          |
| <b>Vertical</b>              |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6121.000                     | 4.055                   | 63.820                   | 67.875                         | -6.125       | 74.000          |
| 11590.000                    | 16.461                  | 41.830                   | 58.291                         | -15.709      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6121.000                     | 4.055                   | 48.840                   | 52.895                         | -1.105       | 54.000          |
| 11590.000                    | 16.461                  | 27.480                   | 43.941                         | -10.059      | 54.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 16: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Panel Antenna)  
(5780 MHz)

| Frequency<br>MHz             | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|------------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b>            |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6071.000                     | 5.428                   | 63.170                   | 68.599                         | -5.401       | 74.000          |
| 11560.000                    | 14.701                  | 47.770                   | 62.471                         | -11.529      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6071.000                     | 5.428                   | 47.380                   | 52.809                         | -1.191       | 54.000          |
| 11560.000                    | 14.701                  | 33.170                   | 47.871                         | -6.129       | 54.000          |
| <b>Vertical</b>              |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6082.000                     | 3.806                   | 66.290                   | 70.095                         | -3.905       | 74.000          |
| 11560.000                    | 16.088                  | 42.110                   | 58.198                         | -15.802      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6082.000                     | 3.806                   | 49.060                   | 52.865                         | -1.135       | 54.000          |
| 11560.000                    | 16.088                  | 26.880                   | 42.968                         | -11.032      | 54.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 17: Transmit - 802.11a\_6Mbps(Sector Antenna) (5745 MHz)

| Frequency<br>MHz             | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|------------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b>            |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6070.000                     | 5.425                   | 56.200                   | 61.625                         | -12.375      | 74.000          |
| 11490.000                    | 14.326                  | 48.310                   | 62.635                         | -11.365      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6070.000                     | 5.425                   | 43.040                   | 48.465                         | -5.535       | 54.000          |
| 11490.000                    | 14.326                  | 33.620                   | 47.945                         | -6.055       | 54.000          |
| <b>Vertical</b>              |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6059.000                     | 3.708                   | 59.810                   | 63.518                         | -10.482      | 74.000          |
| 11490.000                    | 15.842                  | 43.710                   | 59.551                         | -14.449      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6059.000                     | 3.708                   | 47.390                   | 51.098                         | -2.902       | 54.000          |
| 11490.000                    | 15.842                  | 29.480                   | 45.321                         | -8.679       | 54.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 17: Transmit - 802.11a\_6Mbps(Sector Antenna) (5785 MHz)

| Frequency             | Correct | Reading | Measurement | Margin  | Limit  |
|-----------------------|---------|---------|-------------|---------|--------|
| MHz                   | Factor  | Level   | Level       |         |        |
|                       | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b>     |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 6112.000              | 5.490   | 58.670  | 64.160      | -9.840  | 74.000 |
| 11570.000             | 14.849  | 45.820  | 60.669      | -13.331 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 6112.000              | 5.490   | 45.900  | 51.390      | -2.610  | 54.000 |
| 11570.000             | 14.849  | 31.760  | 46.609      | -7.391  | 54.000 |
| <b>Vertical</b>       |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 6111.000              | 3.973   | 62.670  | 66.643      | -7.357  | 74.000 |
| 11570.000             | 16.215  | 46.800  | 63.014      | -10.986 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 6111.000              | 3.973   | 49.300  | 53.273      | -0.727  | 54.000 |
| 11570.000             | 16.215  | 31.760  | 47.974      | -6.026  | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 17: Transmit - 802.11a\_6Mbps(Sector Antenna) (5825 MHz)

| Frequency             | Correct | Reading | Measurement | Margin  | Limit  |
|-----------------------|---------|---------|-------------|---------|--------|
| MHz                   | Factor  | Level   | Level       |         |        |
|                       | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b>     |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 6138.000              | 5.371   | 62.280  | 67.650      | -6.350  | 74.000 |
| 11650.000             | 13.179  | 47.050  | 60.229      | -13.771 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 6138.000              | 5.371   | 48.110  | 53.480      | -0.520  | 54.000 |
| 11650.000             | 13.179  | 29.900  | 43.079      | -10.921 | 54.000 |
| <b>Vertical</b>       |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 6150.000              | 4.290   | 63.400  | 67.690      | -6.310  | 74.000 |
| 11650.000             | 14.634  | 47.060  | 61.694      | -12.306 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 6150.000              | 4.290   | 49.220  | 53.510      | -0.490  | 54.000 |
| 11650.000             | 14.634  | 32.290  | 46.924      | -7.076  | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIE Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 18: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Sector Antenna)  
(5745MHz)

| Frequency             | Correct | Reading | Measurement | Margin  | Limit  |
|-----------------------|---------|---------|-------------|---------|--------|
| MHz                   | Factor  | Level   | Level       |         |        |
|                       | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b>     |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 6060.000              | 5.387   | 56.790  | 62.177      | -11.823 | 74.000 |
| 11490.000             | 14.326  | 49.260  | 63.585      | -10.415 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 6060.000              | 5.387   | 43.820  | 49.207      | -4.793  | 54.000 |
| 11490.000             | 14.326  | 34.690  | 49.015      | -4.985  | 54.000 |
| <b>Vertical</b>       |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 6071.000              | 3.757   | 60.940  | 64.697      | -9.303  | 74.000 |
| 11490.000             | 15.842  | 44.370  | 60.211      | -13.789 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 6071.000              | 3.757   | 47.690  | 51.447      | -2.553  | 54.000 |
| 11490.000             | 15.842  | 31.040  | 46.881      | -7.119  | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 18: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Sector Antenna)  
(5785 MHz)

| Frequency<br>MHz             | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|------------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b>            |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6170.000                     | 5.176                   | 58.410                   | 63.586                         | -10.414      | 74.000          |
| 11570.000                    | 14.849                  | 46.210                   | 61.059                         | -12.941      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6111.000                     | 3.973                   | 45.700                   | 49.673                         | -4.327       | 54.000          |
| 11570.000                    | 14.849                  | 31.880                   | 46.729                         | -7.271       | 54.000          |
| <b>Vertical</b>              |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6111.000                     | 3.973                   | 60.080                   | 64.053                         | -9.947       | 74.000          |
| 11570.000                    | 16.215                  | 44.860                   | 61.074                         | -12.926      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6111.000                     | 3.973                   | 47.620                   | 51.593                         | -2.407       | 54.000          |
| 11570.000                    | 16.215                  | 31.020                   | 47.234                         | -6.766       | 54.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIE Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 18: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Sector Antenna)  
(5825 MHz)

| Frequency             | Correct | Reading | Measurement | Margin  | Limit  |
|-----------------------|---------|---------|-------------|---------|--------|
| MHz                   | Factor  | Level   | Level       | dB      | dBuV/m |
|                       | dB      | dBuV    | dBuV/m      |         |        |
| <b>Horizontal</b>     |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 6150.000              | 5.313   | 60.260  | 65.573      | -8.427  | 74.000 |
| 11650.000             | 13.179  | 43.670  | 56.849      | -17.151 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 6150.000              | 5.313   | 46.270  | 51.583      | -2.417  | 54.000 |
| 11650.000             | 13.179  | 29.290  | 42.469      | -11.531 | 54.000 |
| <b>Vertical</b>       |         |         |             |         |        |
| <b>Peak Detector:</b> |         |         |             |         |        |
| 6149.000              | 4.282   | 59.510  | 63.792      | -10.208 | 74.000 |
| 11650.000             | 14.634  | 43.340  | 57.974      | -16.026 | 74.000 |
| <b>Average</b>        |         |         |             |         |        |
| <b>Detector:</b>      |         |         |             |         |        |
| 6149.000              | 4.282   | 46.330  | 50.612      | -3.388  | 54.000 |
| 11650.000             | 14.634  | 29.780  | 44.414      | -9.586  | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 19: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Sector Antenna)  
(5755MHz)

| Frequency<br>MHz             | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|------------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b>            |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6071.000                     | 5.428                   | 56.190                   | 61.619                         | -12.381      | 74.000          |
| 11510.000                    | 14.402                  | 43.920                   | 58.322                         | -15.678      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6071.000                     | 5.428                   | 42.050                   | 47.479                         | -6.521       | 54.000          |
| 11510.000                    | 14.402                  | 29.450                   | 43.852                         | -10.148      | 54.000          |
| <b>Vertical</b>              |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6072.000                     | 3.762                   | 56.140                   | 59.901                         | -14.099      | 74.000          |
| 11510.000                    | 15.894                  | 42.580                   | 58.474                         | -15.526      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6072.000                     | 3.762                   | 42.220                   | 45.981                         | -8.019       | 54.000          |
| 11510.000                    | 15.894                  | 28.000                   | 43.894                         | -10.106      | 54.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 19: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Sector Antenna)  
(5795 MHz)

| Frequency<br>MHz             | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|------------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b>            |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6124.000                     | 5.435                   | 57.390                   | 62.825                         | -11.175      | 74.000          |
| 11590.000                    | 15.138                  | 42.940                   | 58.078                         | -15.922      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6124.000                     | 5.435                   | 43.580                   | 49.015                         | -4.985       | 54.000          |
| 11590.000                    | 15.138                  | 27.470                   | 42.608                         | -11.392      | 54.000          |
| <b>Vertical</b>              |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6121.000                     | 4.055                   | 58.900                   | 62.955                         | -11.045      | 74.000          |
| 11590.000                    | 16.461                  | 41.950                   | 58.411                         | -15.589      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6121.000                     | 4.055                   | 44.560                   | 48.615                         | -5.385       | 54.000          |
| 11590.000                    | 16.461                  | 28.010                   | 44.471                         | -9.529       | 54.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 20: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Sector Antenna)  
(5780 MHz)

| Frequency<br>MHz             | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|------------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b>            |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6124.000                     | 5.435                   | 59.470                   | 64.905                         | -9.095       | 74.000          |
| 11560.000                    | 14.701                  | 43.330                   | 58.031                         | -15.969      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6124.000                     | 5.435                   | 43.710                   | 49.145                         | -4.855       | 54.000          |
| 11560.000                    | 14.701                  | 27.860                   | 42.561                         | -11.439      | 54.000          |
| <b>Vertical</b>              |                         |                          |                                |              |                 |
| <b>Peak Detector:</b>        |                         |                          |                                |              |                 |
| 6072.000                     | 3.762                   | 58.040                   | 61.801                         | -12.199      | 74.000          |
| 11560.000                    | 16.088                  | 42.800                   | 58.888                         | -15.112      | 74.000          |
| <b>Average<br/>Detector:</b> |                         |                          |                                |              |                 |
| 6072.000                     | 3.762                   | 42.330                   | 46.091                         | -7.909       | 54.000          |
| 11560.000                    | 16.088                  | 26.910                   | 42.998                         | -11.002      | 54.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : 802.11 ac PCIe Module  
Test Item : General Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit - 802.11a\_6Mbps(Dipole Antenna) (5785MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b> |         |         |             |         |        |
| 194.900           | -10.473 | 46.951  | 36.478      | -7.022  | 43.500 |
| 323.910           | -4.531  | 42.976  | 38.445      | -7.555  | 46.000 |
| 406.360           | 0.628   | 38.814  | 39.443      | -6.557  | 46.000 |
| 517.910           | 3.201   | 33.176  | 36.377      | -9.623  | 46.000 |
| 714.820           | 3.801   | 36.563  | 40.364      | -5.636  | 46.000 |
| 776.900           | 5.167   | 33.696  | 38.863      | -7.137  | 46.000 |
| <b>Vertical</b>   |         |         |             |         |        |
| 64.920            | -12.387 | 43.026  | 30.639      | -9.361  | 40.000 |
| 259.890           | -4.855  | 42.874  | 38.019      | -7.981  | 46.000 |
| 324.880           | -3.120  | 43.238  | 40.118      | -5.882  | 46.000 |
| 517.910           | 0.571   | 33.176  | 33.747      | -12.253 | 46.000 |
| 714.820           | -1.629  | 36.563  | 34.934      | -11.066 | 46.000 |
| 900.090           | 1.958   | 27.957  | 29.915      | -16.085 | 46.000 |

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : 802.11 ac PCIe Module  
Test Item : General Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Dipole Antenna)  
(5785 MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b> |         |         |             |         |        |
| 99.840            | -9.873  | 48.468  | 38.595      | -4.905  | 43.500 |
| 226.910           | -9.203  | 45.362  | 36.159      | -9.841  | 46.000 |
| 403.450           | 0.917   | 35.009  | 35.926      | -10.074 | 46.000 |
| 583.870           | 3.296   | 31.474  | 34.770      | -11.230 | 46.000 |
| 746.830           | 3.911   | 32.920  | 36.831      | -9.169  | 46.000 |
| 970.900           | 7.347   | 24.071  | 31.418      | -22.582 | 54.000 |
| <b>Vertical</b>   |         |         |             |         |        |
| 65.890            | -12.431 | 47.352  | 34.921      | -5.079  | 40.000 |
| 226.910           | -6.213  | 45.362  | 39.149      | -6.851  | 46.000 |
| 387.930           | -0.717  | 38.584  | 37.867      | -8.133  | 46.000 |
| 518.880           | 0.763   | 38.032  | 38.795      | -7.205  | 46.000 |
| 700.270           | -0.342  | 33.894  | 33.552      | -12.448 | 46.000 |
| 900.090           | 1.958   | 28.722  | 30.680      | -15.320 | 46.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : 802.11 ac PCIe Module  
Test Item : General Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Dipole Antenna)  
(5755MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b> |         |         |             |         |        |
| 99.840            | -9.873  | 48.780  | 38.907      | -4.593  | 43.500 |
| 323.910           | -4.531  | 43.405  | 38.874      | -7.126  | 46.000 |
| 404.420           | 0.889   | 35.775  | 36.664      | -9.336  | 46.000 |
| 517.910           | 3.201   | 32.362  | 35.563      | -10.437 | 46.000 |
| 725.490           | 3.838   | 32.881  | 36.718      | -9.282  | 46.000 |
| 889.420           | 6.654   | 24.902  | 31.556      | -14.444 | 46.000 |
| <b>Vertical</b>   |         |         |             |         |        |
| 193.930           | -5.664  | 44.260  | 38.596      | -4.904  | 43.500 |
| 323.910           | -3.341  | 43.405  | 40.064      | -5.936  | 46.000 |
| 388.900           | -0.726  | 37.298  | 36.572      | -9.428  | 46.000 |
| 517.910           | 0.571   | 33.365  | 33.936      | -12.064 | 46.000 |
| 714.820           | -1.629  | 35.838  | 34.209      | -11.791 | 46.000 |
| 900.090           | 1.958   | 28.589  | 30.547      | -15.453 | 46.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : 802.11 ac PCIe Module  
Test Item : General Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Dipole Antenna)  
(5780MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b> |         |         |             |         |        |
| 99.840            | -9.873  | 48.714  | 38.841      | -4.659  | 43.500 |
| 226.910           | -9.203  | 45.332  | 36.129      | -9.871  | 46.000 |
| 324.880           | -4.510  | 43.534  | 39.024      | -6.976  | 46.000 |
| 584.840           | 3.251   | 33.389  | 36.640      | -9.360  | 46.000 |
| 776.900           | 5.167   | 35.437  | 40.604      | -5.396  | 46.000 |
| 927.250           | 7.030   | 26.145  | 33.175      | -12.825 | 46.000 |
| <b>Vertical</b>   |         |         |             |         |        |
| 194.900           | -5.673  | 44.256  | 38.583      | -4.917  | 43.500 |
| 324.880           | -3.120  | 44.112  | 40.992      | -5.008  | 46.000 |
| 518.880           | 0.763   | 38.236  | 38.999      | -7.001  | 46.000 |
| 584.840           | -2.229  | 33.389  | 31.160      | -14.840 | 46.000 |
| 779.810           | 2.745   | 34.617  | 37.362      | -8.638  | 46.000 |
| 805.030           | 3.583   | 30.312  | 33.895      | -12.105 | 46.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : 802.11 ac PCIe Module  
Test Item : General Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 5: Transmit - 802.11a\_6Mbps(Grid DISH Antenna) (5785MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b> |         |         |             |         |        |
| 194.900           | -10.473 | 48.076  | 37.603      | -5.897  | 43.500 |
| 323.910           | -4.531  | 40.897  | 36.366      | -9.634  | 46.000 |
| 397.630           | 0.826   | 39.457  | 40.283      | -5.717  | 46.000 |
| 584.840           | 3.251   | 31.364  | 34.615      | -11.385 | 46.000 |
| 714.820           | 3.801   | 37.007  | 40.808      | -5.192  | 46.000 |
| 914.640           | 6.410   | 29.041  | 35.451      | -10.549 | 46.000 |
| <b>Vertical</b>   |         |         |             |         |        |
| 66.860            | -12.435 | 45.065  | 32.630      | -7.370  | 40.000 |
| 259.890           | -4.855  | 42.711  | 37.856      | -8.144  | 46.000 |
| 518.880           | 0.763   | 36.802  | 37.565      | -8.435  | 46.000 |
| 702.210           | -0.587  | 37.478  | 36.891      | -9.109  | 46.000 |
| 794.360           | 2.657   | 32.234  | 34.891      | -11.109 | 46.000 |
| 961.200           | 3.310   | 24.582  | 27.892      | -26.108 | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : 802.11 ac PCIe Module  
Test Item : General Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 6: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Grid DISH Antenna)  
(5785 MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b> |         |         |             |         |        |
| 194.900           | -10.473 | 46.195  | 35.722      | -7.778  | 43.500 |
| 258.920           | -5.440  | 43.739  | 38.299      | -7.701  | 46.000 |
| 356.890           | -1.000  | 37.560  | 36.560      | -9.440  | 46.000 |
| 517.910           | 3.201   | 35.023  | 38.224      | -7.776  | 46.000 |
| 701.240           | 2.759   | 37.011  | 39.770      | -6.230  | 46.000 |
| 916.580           | 6.470   | 28.906  | 35.376      | -10.624 | 46.000 |
| <b>Vertical</b>   |         |         |             |         |        |
| 58.130            | -11.204 | 39.921  | 28.717      | -11.283 | 40.000 |
| 259.890           | -4.855  | 42.756  | 37.901      | -8.099  | 46.000 |
| 519.850           | 0.954   | 35.862  | 36.816      | -9.184  | 46.000 |
| 701.240           | -0.541  | 37.011  | 36.470      | -9.530  | 46.000 |
| 778.840           | 2.580   | 35.253  | 37.833      | -8.167  | 46.000 |
| 970.900           | 2.967   | 26.217  | 29.184      | -24.816 | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : 802.11 ac PCIe Module  
Test Item : General Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 7: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Grid DISH Antenna)  
(5755MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b> |         |         |             |         |        |
| 65.890            | -13.051 | 45.530  | 32.479      | -7.521  | 40.000 |
| 193.930           | -10.284 | 45.119  | 34.835      | -8.665  | 43.500 |
| 407.330           | 0.433   | 37.961  | 38.394      | -7.606  | 46.000 |
| 584.840           | 3.251   | 30.715  | 33.966      | -12.034 | 46.000 |
| 796.300           | 6.389   | 31.275  | 37.664      | -8.336  | 46.000 |
| 914.640           | 6.410   | 29.696  | 36.106      | -9.894  | 46.000 |
| <b>Vertical</b>   |         |         |             |         |        |
| 65.890            | -12.431 | 45.530  | 33.099      | -6.901  | 40.000 |
| 259.890           | -4.855  | 43.365  | 38.510      | -7.490  | 46.000 |
| 517.910           | 0.571   | 40.670  | 41.241      | -4.759  | 46.000 |
| 666.320           | -0.951  | 35.946  | 34.995      | -11.005 | 46.000 |
| 779.810           | 2.745   | 32.695  | 35.440      | -10.560 | 46.000 |
| 900.090           | 1.958   | 28.711  | 30.669      | -15.331 | 46.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : 802.11 ac PCIe Module  
Test Item : General Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 8: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Grid DISH Antenna)  
(5780MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b> |         |         |             |         |        |
| 193.930           | -10.284 | 47.100  | 36.816      | -6.684  | 43.500 |
| 259.890           | -5.455  | 42.134  | 36.679      | -9.321  | 46.000 |
| 405.390           | 0.794   | 38.015  | 38.809      | -7.191  | 46.000 |
| 582.900           | 3.351   | 30.501  | 33.852      | -12.148 | 46.000 |
| 720.640           | 3.826   | 35.410  | 39.236      | -6.764  | 46.000 |
| 926.280           | 6.832   | 28.325  | 35.157      | -10.843 | 46.000 |
| <b>Vertical</b>   |         |         |             |         |        |
| 64.920            | -12.387 | 44.710  | 32.323      | -7.677  | 40.000 |
| 292.870           | -5.136  | 44.004  | 38.868      | -7.132  | 46.000 |
| 517.910           | 0.571   | 38.311  | 38.882      | -7.118  | 46.000 |
| 697.360           | 0.691   | 31.685  | 32.376      | -13.624 | 46.000 |
| 794.360           | 2.657   | 32.234  | 34.891      | -11.109 | 46.000 |
| 930.160           | 3.830   | 25.104  | 28.934      | -17.066 | 46.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : 802.11 ac PCIe Module  
Test Item : General Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 9: Transmit - 802.11a\_6Mbps(Omni Antenna) (5785MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b> |         |         |             |         |        |
| 66.860            | -13.595 | 41.046  | 27.451      | -12.549 | 40.000 |
| 258.920           | -5.440  | 44.520  | 39.080      | -6.920  | 46.000 |
| 387.930           | 1.083   | 39.276  | 40.359      | -5.641  | 46.000 |
| 517.910           | 3.201   | 39.028  | 42.229      | -3.771  | 46.000 |
| 711.910           | 3.788   | 35.442  | 39.230      | -6.770  | 46.000 |
| 985.450           | 8.238   | 24.621  | 32.859      | -21.141 | 54.000 |
| <b>Vertical</b>   |         |         |             |         |        |
| 99.840            | -6.063  | 44.136  | 38.073      | -5.427  | 43.500 |
| 258.920           | -4.900  | 45.490  | 40.590      | -5.410  | 46.000 |
| 299.660           | -4.061  | 41.077  | 37.016      | -8.984  | 46.000 |
| 517.910           | 0.571   | 36.468  | 37.039      | -8.961  | 46.000 |
| 746.830           | 1.491   | 35.898  | 37.389      | -8.611  | 46.000 |
| 897.180           | 0.937   | 31.945  | 32.882      | -13.118 | 46.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : 802.11 ac PCIe Module  
Test Item : General Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 10: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Omni Antenna)  
(5785 MHz)

| Frequency<br>MHz  | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|-------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b> |                         |                          |                                |              |                 |
| 99.840            | -9.873                  | 44.869                   | 34.996                         | -8.504       | 43.500          |
| 259.890           | -5.455                  | 43.592                   | 38.137                         | -7.863       | 46.000          |
| 356.890           | -1.000                  | 40.573                   | 39.573                         | -6.427       | 46.000          |
| 517.910           | 3.201                   | 35.235                   | 38.436                         | -7.564       | 46.000          |
| 711.910           | 3.788                   | 35.479                   | 39.267                         | -6.733       | 46.000          |
| 970.900           | 7.347                   | 26.715                   | 34.062                         | -19.938      | 54.000          |
| <b>Vertical</b>   |                         |                          |                                |              |                 |
| 99.840            | -6.063                  | 44.869                   | 38.806                         | -4.694       | 43.500          |
| 258.920           | -4.900                  | 44.053                   | 39.153                         | -6.847       | 46.000          |
| 387.930           | -0.717                  | 36.870                   | 36.153                         | -9.847       | 46.000          |
| 517.910           | 0.571                   | 36.068                   | 36.639                         | -9.361       | 46.000          |
| 776.900           | 2.067                   | 33.220                   | 35.287                         | -10.713      | 46.000          |
| 947.620           | 3.231                   | 26.313                   | 29.544                         | -16.456      | 46.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : 802.11 ac PCIe Module  
Test Item : General Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 11: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Omni Antenna)  
(5755MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b> |         |         |             |         |        |
| 99.840            | -9.873  | 44.869  | 34.996      | -8.504  | 43.500 |
| 322.940           | -4.536  | 36.088  | 31.553      | -14.447 | 46.000 |
| 405.390           | 0.794   | 36.785  | 37.579      | -8.421  | 46.000 |
| 517.910           | 3.201   | 36.068  | 39.269      | -6.731  | 46.000 |
| 711.910           | 3.788   | 35.479  | 39.267      | -6.733  | 46.000 |
| 970.900           | 7.347   | 26.715  | 34.062      | -19.938 | 54.000 |
| <b>Vertical</b>   |         |         |             |         |        |
| 99.840            | -6.063  | 41.998  | 35.935      | -7.565  | 43.500 |
| 258.920           | -4.900  | 44.733  | 39.833      | -6.167  | 46.000 |
| 387.930           | -0.717  | 35.082  | 34.365      | -11.635 | 46.000 |
| 517.910           | 0.571   | 30.388  | 30.959      | -15.041 | 46.000 |
| 612.970           | 1.872   | 28.271  | 30.143      | -15.857 | 46.000 |
| 967.990           | 3.907   | 23.436  | 27.343      | -26.657 | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : 802.11 ac PCIe Module  
Test Item : General Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 12: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Omni Antenna)  
(5780MHz)

| Frequency<br>MHz  | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|-------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b> |                         |                          |                                |              |                 |
| 193.930           | -10.284                 | 44.141                   | 33.857                         | -9.643       | 43.500          |
| 389.870           | 0.998                   | 41.135                   | 42.132                         | -3.868       | 46.000          |
| 517.910           | 3.201                   | 36.316                   | 39.517                         | -6.483       | 46.000          |
| 711.910           | 3.788                   | 37.272                   | 41.060                         | -4.940       | 46.000          |
| 809.880           | 6.266                   | 31.426                   | 37.692                         | -8.308       | 46.000          |
| 984.480           | 8.098                   | 24.321                   | 32.419                         | -21.581      | 54.000          |
| <b>Vertical</b>   |                         |                          |                                |              |                 |
| 60.070            | -11.386                 | 47.062                   | 35.676                         | -4.324       | 40.000          |
| 199.750           | -5.717                  | 42.072                   | 36.355                         | -7.145       | 43.500          |
| 323.910           | -3.341                  | 41.938                   | 38.597                         | -7.403       | 46.000          |
| 517.910           | 0.571                   | 31.246                   | 31.817                         | -14.183      | 46.000          |
| 776.900           | 2.067                   | 32.136                   | 34.203                         | -11.797      | 46.000          |
| 951.500           | 3.083                   | 26.323                   | 29.406                         | -16.594      | 46.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : 802.11 ac PCIe Module  
Test Item : General Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 13: Transmit - 802.11a\_6Mbps(Panel Antenna) (5785MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b> |         |         |             |         |        |
| 99.840            | -9.873  | 44.948  | 35.075      | -8.425  | 43.500 |
| 298.690           | -4.764  | 41.506  | 36.742      | -9.258  | 46.000 |
| 517.910           | 3.201   | 36.231  | 39.432      | -6.568  | 46.000 |
| 711.910           | 3.788   | 35.625  | 39.413      | -6.587  | 46.000 |
| 794.360           | 6.387   | 35.770  | 42.157      | -3.843  | 46.000 |
| 971.870           | 7.268   | 26.653  | 33.921      | -20.079 | 54.000 |
| <b>Vertical</b>   |         |         |             |         |        |
| 99.840            | -6.063  | 44.948  | 38.885      | -4.615  | 43.500 |
| 193.930           | -5.664  | 42.706  | 37.042      | -6.458  | 43.500 |
| 389.870           | -0.732  | 37.851  | 37.118      | -8.882  | 46.000 |
| 616.850           | 1.216   | 30.826  | 32.042      | -13.958 | 46.000 |
| 794.360           | 2.657   | 35.770  | 38.427      | -7.573  | 46.000 |
| 969.930           | 3.896   | 25.648  | 29.544      | -24.456 | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : 802.11 ac PCIe Module  
Test Item : General Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 14: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Panel Antenna)  
(5785 MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b> |         |         |             |         |        |
| 198.780           | -9.958  | 43.749  | 33.791      | -9.709  | 43.500 |
| 387.930           | 1.083   | 37.159  | 38.242      | -7.758  | 46.000 |
| 612.970           | 3.262   | 28.360  | 31.622      | -14.378 | 46.000 |
| 688.630           | 3.478   | 34.231  | 37.708      | -8.292  | 46.000 |
| 779.810           | 5.205   | 33.327  | 38.532      | -7.468  | 46.000 |
| 984.480           | 8.098   | 26.144  | 34.242      | -19.758 | 54.000 |
| <b>Vertical</b>   |         |         |             |         |        |
| 99.840            | -6.063  | 42.154  | 36.091      | -7.409  | 43.500 |
| 258.920           | -4.900  | 44.430  | 39.530      | -6.470  | 46.000 |
| 389.870           | -0.732  | 39.618  | 38.885      | -7.115  | 46.000 |
| 517.910           | 0.571   | 39.278  | 39.849      | -6.151  | 46.000 |
| 688.630           | 2.298   | 34.231  | 36.528      | -9.472  | 46.000 |
| 779.810           | 2.745   | 33.327  | 36.072      | -9.928  | 46.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : 802.11 ac PCIe Module  
Test Item : General Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 15: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Panel Antenna)  
(5755MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b> |         |         |             |         |        |
| 99.840            | -9.873  | 42.354  | 32.481      | -11.019 | 43.500 |
| 258.920           | -5.440  | 46.225  | 40.785      | -5.215  | 46.000 |
| 387.930           | 1.083   | 41.376  | 42.459      | -3.541  | 46.000 |
| 714.820           | 3.801   | 34.516  | 38.317      | -7.683  | 46.000 |
| 776.900           | 5.167   | 33.661  | 38.828      | -7.172  | 46.000 |
| 984.480           | 8.098   | 26.144  | 34.242      | -19.758 | 54.000 |
| <b>Vertical</b>   |         |         |             |         |        |
| 99.840            | -6.063  | 41.433  | 35.370      | -8.130  | 43.500 |
| 199.750           | -5.717  | 45.197  | 39.480      | -4.020  | 43.500 |
| 291.900           | -5.272  | 43.604  | 38.332      | -7.668  | 46.000 |
| 519.850           | 0.954   | 28.521  | 29.475      | -16.525 | 46.000 |
| 779.810           | 2.745   | 25.844  | 28.589      | -17.411 | 46.000 |
| 967.020           | 3.889   | 22.447  | 26.336      | -27.664 | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : 802.11 ac PCIe Module  
Test Item : General Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 16: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Panel Antenna)  
(5780MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b> |         |         |             |         |        |
| 99.840            | -9.873  | 45.208  | 35.335      | -8.165  | 43.500 |
| 259.890           | -5.455  | 43.016  | 37.561      | -8.439  | 46.000 |
| 388.900           | 1.034   | 38.824  | 39.858      | -6.142  | 46.000 |
| 519.850           | 3.204   | 35.858  | 39.062      | -6.938  | 46.000 |
| 711.910           | 3.788   | 37.272  | 41.060      | -4.940  | 46.000 |
| 986.420           | 8.189   | 25.658  | 33.847      | -20.153 | 54.000 |
| <b>Vertical</b>   |         |         |             |         |        |
| 54.250            | -11.277 | 44.988  | 33.712      | -6.288  | 40.000 |
| 258.920           | -4.900  | 44.559  | 39.659      | -6.341  | 46.000 |
| 389.870           | -0.732  | 41.135  | 40.402      | -5.598  | 46.000 |
| 682.810           | 1.817   | 32.925  | 34.742      | -11.258 | 46.000 |
| 809.880           | 3.026   | 31.426  | 34.452      | -11.548 | 46.000 |
| 964.110           | 3.722   | 25.654  | 29.376      | -24.624 | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : 802.11 ac PCIe Module  
Test Item : General Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 17: Transmit - 802.11a\_6Mbps(Sector Antenna) (5785MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b> |         |         |             |         |        |
| 60.070            | -11.936 | 42.080  | 30.144      | -9.856  | 40.000 |
| 226.910           | -9.203  | 43.086  | 33.883      | -12.117 | 46.000 |
| 324.880           | -4.510  | 40.391  | 35.881      | -10.119 | 46.000 |
| 517.910           | 3.201   | 34.739  | 37.940      | -8.060  | 46.000 |
| 714.820           | 3.801   | 38.112  | 41.913      | -4.087  | 46.000 |
| 900.090           | 5.818   | 31.546  | 37.364      | -8.636  | 46.000 |
| <b>Vertical</b>   |         |         |             |         |        |
| 76.560            | -6.510  | 38.356  | 31.846      | -8.154  | 40.000 |
| 193.930           | -5.664  | 44.922  | 39.258      | -4.242  | 43.500 |
| 517.910           | 0.571   | 34.739  | 35.310      | -10.690 | 46.000 |
| 779.810           | 2.745   | 35.352  | 38.097      | -7.903  | 46.000 |
| 900.090           | 1.958   | 31.546  | 33.504      | -12.496 | 46.000 |
| 970.900           | 2.967   | 25.977  | 28.944      | -25.056 | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : 802.11 ac PCIe Module  
Test Item : General Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 18: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Sector Antenna)  
(5785 MHz)

| Frequency<br>MHz  | Correct<br>Factor<br>dB | Reading<br>Level<br>dBuV | Measurement<br>Level<br>dBuV/m | Margin<br>dB | Limit<br>dBuV/m |
|-------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| <b>Horizontal</b> |                         |                          |                                |              |                 |
| 62.010            | -12.187                 | 44.918                   | 32.731                         | -7.269       | 40.000          |
| 289.960           | -5.470                  | 33.419                   | 27.949                         | -18.051      | 46.000          |
| 387.930           | 1.083                   | 33.760                   | 34.843                         | -11.157      | 46.000          |
| 517.910           | 3.201                   | 38.358                   | 41.559                         | -4.441       | 46.000          |
| 711.910           | 3.788                   | 36.324                   | 40.112                         | -5.888       | 46.000          |
| 900.090           | 5.818                   | 30.214                   | 36.032                         | -9.968       | 46.000          |
| <b>Vertical</b>   |                         |                          |                                |              |                 |
| 76.560            | -6.510                  | 41.421                   | 34.911                         | -5.089       | 40.000          |
| 259.890           | -4.855                  | 42.542                   | 37.687                         | -8.313       | 46.000          |
| 517.910           | 0.571                   | 38.358                   | 38.929                         | -7.071       | 46.000          |
| 681.840           | 1.622                   | 34.483                   | 36.105                         | -9.895       | 46.000          |
| 779.810           | 2.745                   | 34.180                   | 36.925                         | -9.075       | 46.000          |
| 900.090           | 1.958                   | 31.993                   | 33.951                         | -12.049      | 46.000          |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : 802.11 ac PCIe Module  
Test Item : General Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 19: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Sector Antenna)  
(5755MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b> |         |         |             |         |        |
| 64.920            | -12.587 | 44.220  | 31.633      | -8.367  | 40.000 |
| 194.900           | -10.473 | 41.330  | 30.857      | -12.643 | 43.500 |
| 356.890           | -1.000  | 39.447  | 38.447      | -7.553  | 46.000 |
| 581.930           | 3.408   | 29.407  | 32.815      | -13.185 | 46.000 |
| 779.810           | 5.205   | 34.180  | 39.385      | -6.615  | 46.000 |
| 900.090           | 5.818   | 31.993  | 37.811      | -8.189  | 46.000 |
| <b>Vertical</b>   |         |         |             |         |        |
| 62.010            | -11.777 | 45.822  | 34.045      | -5.955  | 40.000 |
| 292.870           | -5.136  | 45.167  | 40.031      | -5.969  | 46.000 |
| 517.910           | 0.571   | 37.112  | 37.683      | -8.317  | 46.000 |
| 614.910           | 1.701   | 31.692  | 33.393      | -12.607 | 46.000 |
| 843.830           | 2.420   | 28.449  | 30.869      | -15.131 | 46.000 |
| 965.080           | 3.832   | 23.958  | 27.790      | -26.210 | 54.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : 802.11 ac PCIe Module  
Test Item : General Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 20: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Sector Antenna)  
(5780MHz)

| Frequency         | Correct | Reading | Measurement | Margin  | Limit  |
|-------------------|---------|---------|-------------|---------|--------|
| MHz               | Factor  | Level   | Level       |         |        |
|                   | dB      | dBuV    | dBuV/m      | dB      | dBuV/m |
| <b>Horizontal</b> |         |         |             |         |        |
| 58.130            | -11.874 | 43.114  | 31.240      | -8.760  | 40.000 |
| 193.930           | -10.284 | 42.867  | 32.583      | -10.917 | 43.500 |
| 389.870           | 0.998   | 38.885  | 39.882      | -6.118  | 46.000 |
| 517.910           | 3.201   | 35.723  | 38.924      | -7.076  | 46.000 |
| 718.700           | 3.818   | 35.728  | 39.546      | -6.454  | 46.000 |
| 915.610           | 6.410   | 30.283  | 36.693      | -9.307  | 46.000 |
| <b>Vertical</b>   |         |         |             |         |        |
| 82.380            | -4.523  | 38.595  | 34.072      | -5.928  | 40.000 |
| 194.900           | -5.673  | 42.834  | 37.161      | -6.339  | 43.500 |
| 392.780           | -1.210  | 39.822  | 38.612      | -7.388  | 46.000 |
| 517.910           | 0.571   | 38.833  | 39.404      | -6.596  | 46.000 |
| 714.820           | -1.629  | 37.581  | 35.952      | -10.048 | 46.000 |
| 912.700           | -0.170  | 30.436  | 30.266      | -15.734 | 46.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

## 5. RF Antenna conducted test


### 5.1. Test Equipment

|   | Equipment         | Manufacturer | Model No./Serial No. | Last Cal.  |
|---|-------------------|--------------|----------------------|------------|
| X | Spectrum Analyzer | R&S          | FSP40 / 100170       | Jun, 2014  |
|   | Spectrum Analyzer | Agilent      | E4407B / US39440758  | Jun, 2014  |
| X | Spectrum Analyzer | Agilent      | N9010A / MY48030495  | Apr., 2014 |

- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
  2. The test instruments marked with “X” are used to measure the final test results.

### 5.2. Test Setup

#### RF antenna Conducted Measurement:

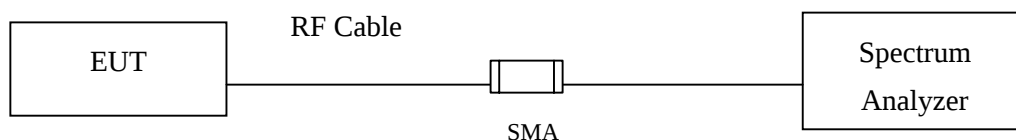

### 5.3. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

#### **5.4. Test Procedure**

The EUT was tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

#### **5.5. Uncertainty**



The measurement uncertainty

Conducted is defined as  $\pm 1.27\text{dB}$



## 5.6. Test Result of RF antenna conducted test

Product : 802.11 ac PCIe Module  
Test Item : RF Antenna Conducted Spurious  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit - 802.11a\_6Mbps(Dipole Antenna)



### Channel 149 (5745MHz) 30MHz -40GHz-Chain A

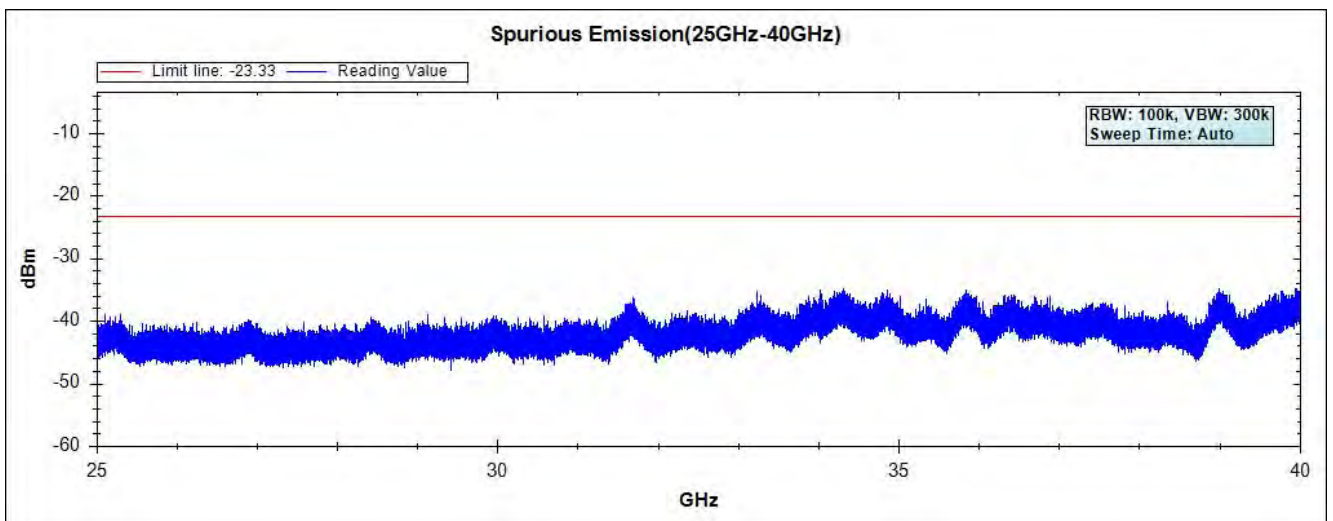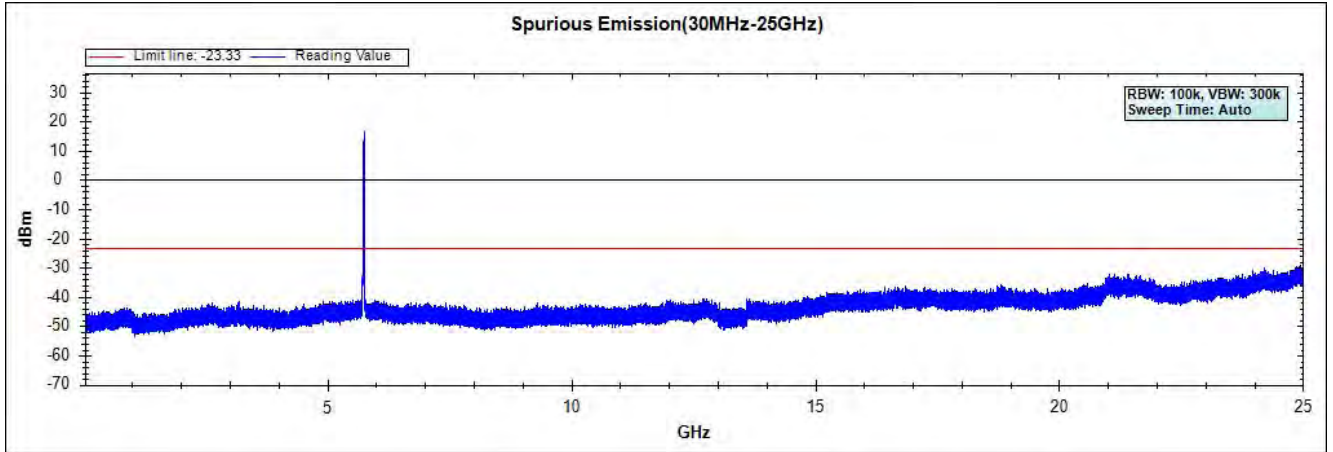



### Channel 157 (5785MHz) 30MHz -40GHz-Chain A

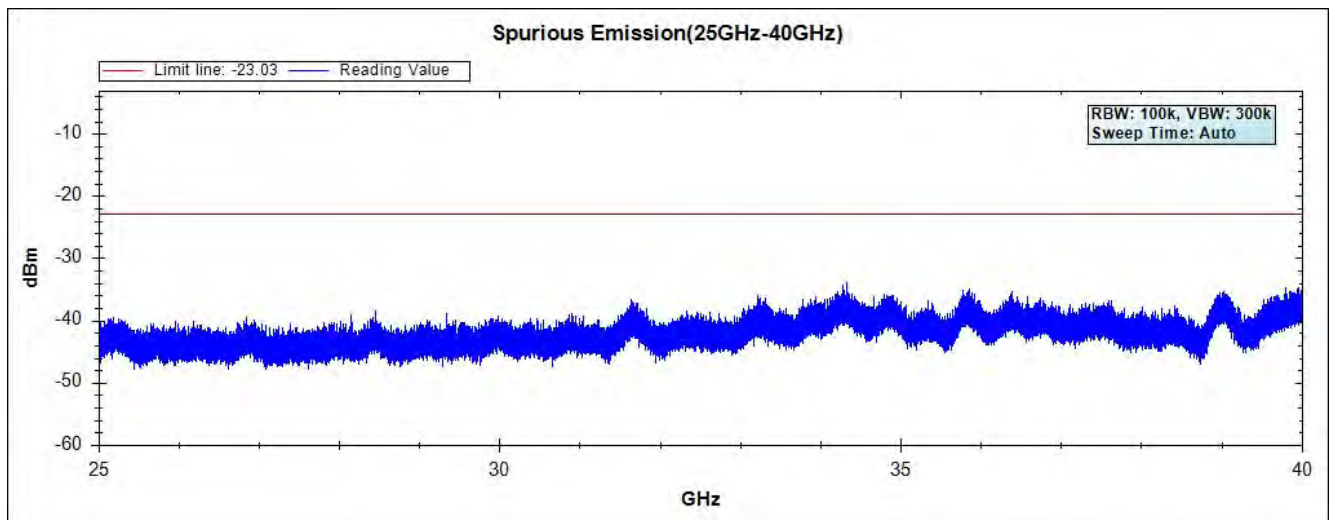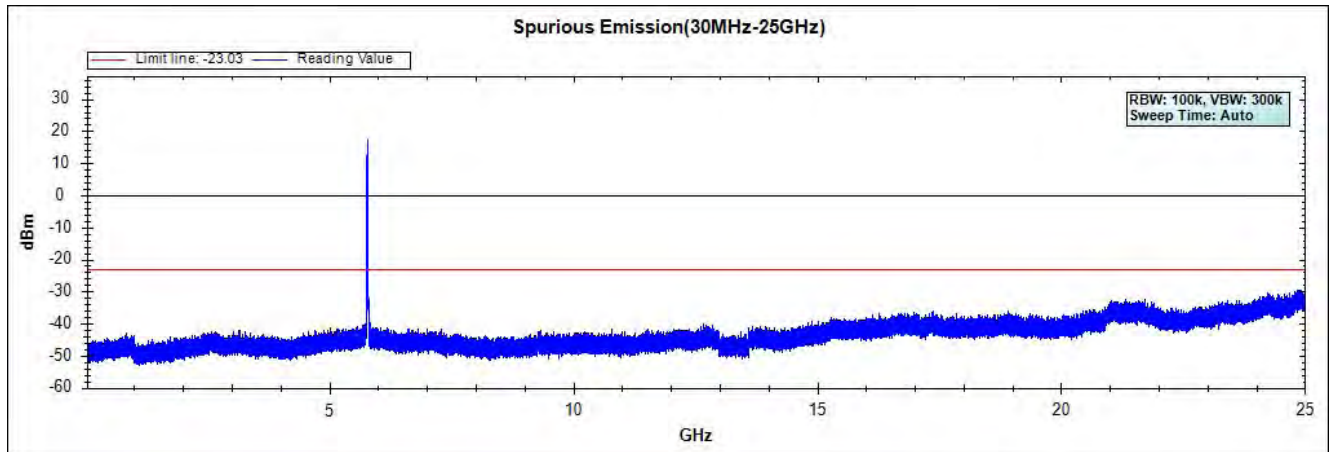



**Channel 165 (5825MHz) 30MHz -40GHz-Chain A**

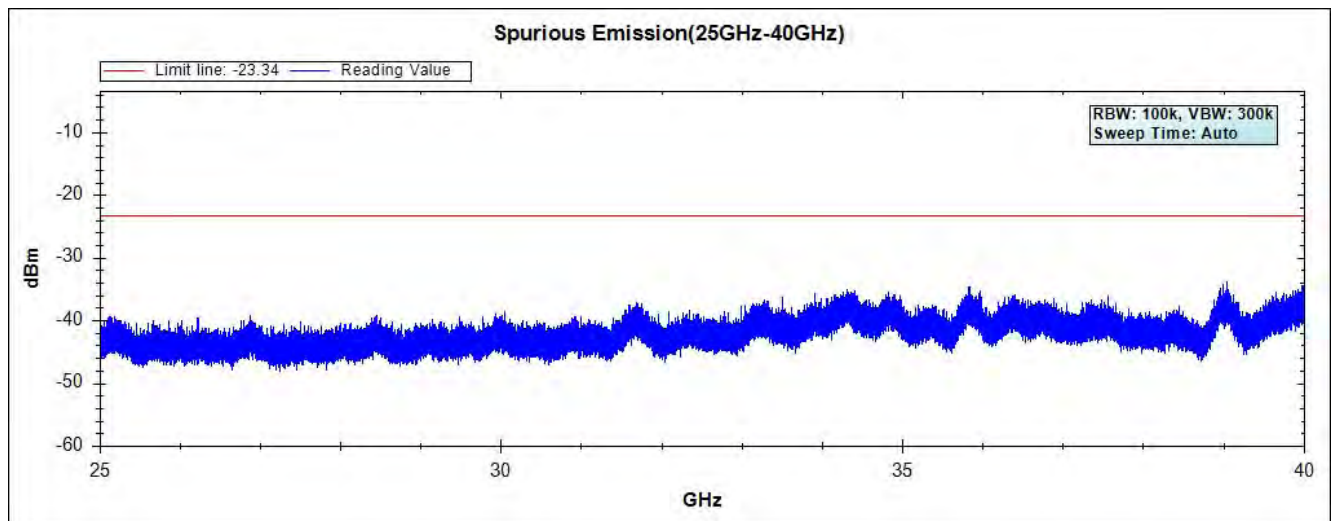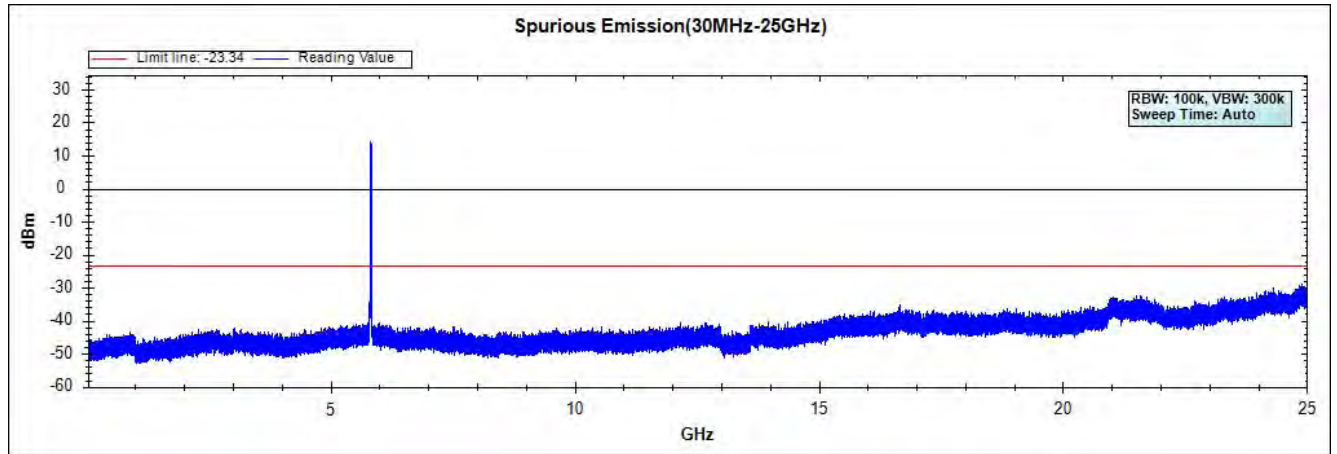



Channel 149 (5745MHz) 30MHz -40GHz-Chain B

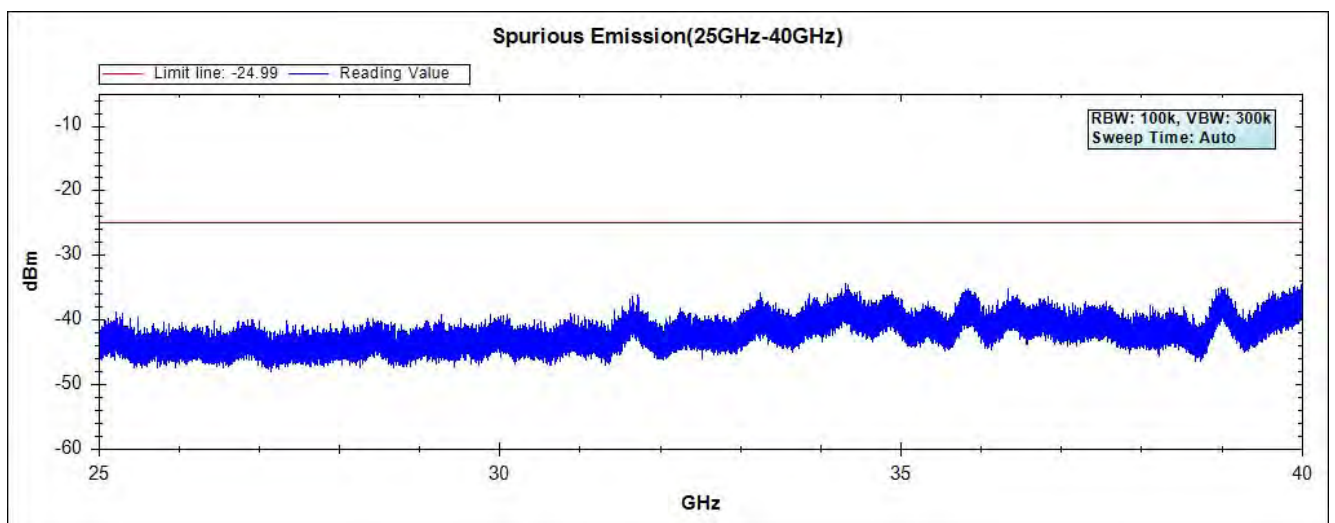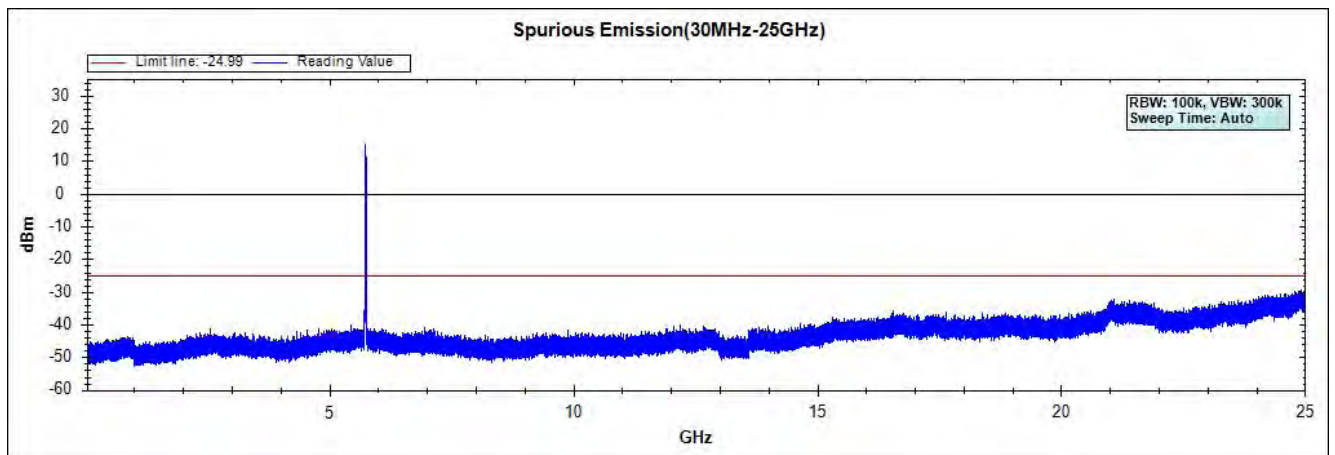

**Channel 157 (5785MHz) 30MHz -40GHz-Chain B**

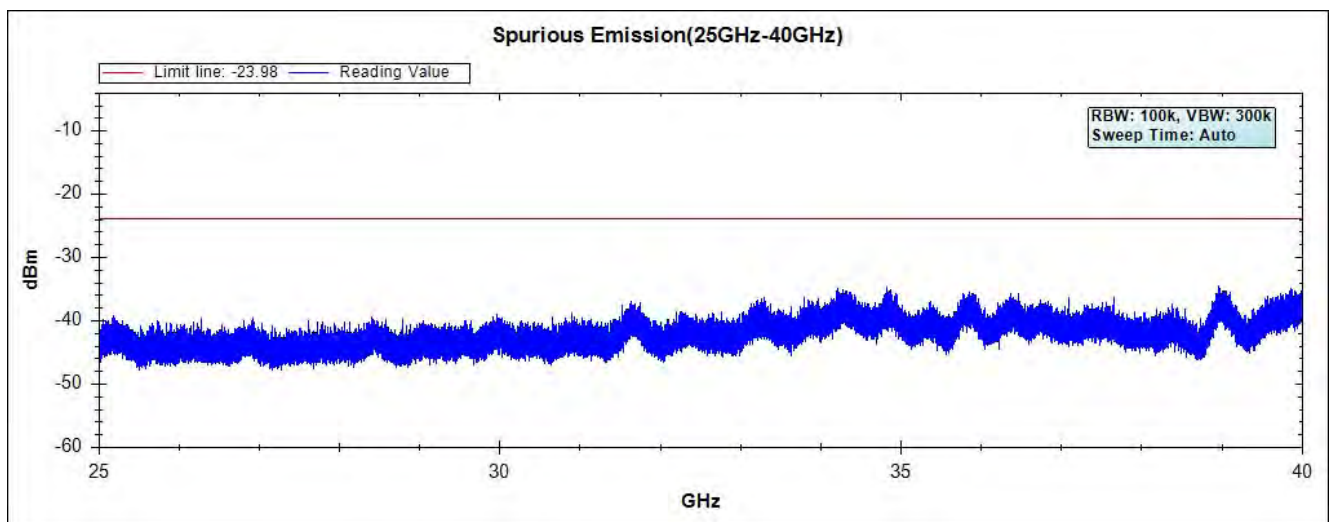
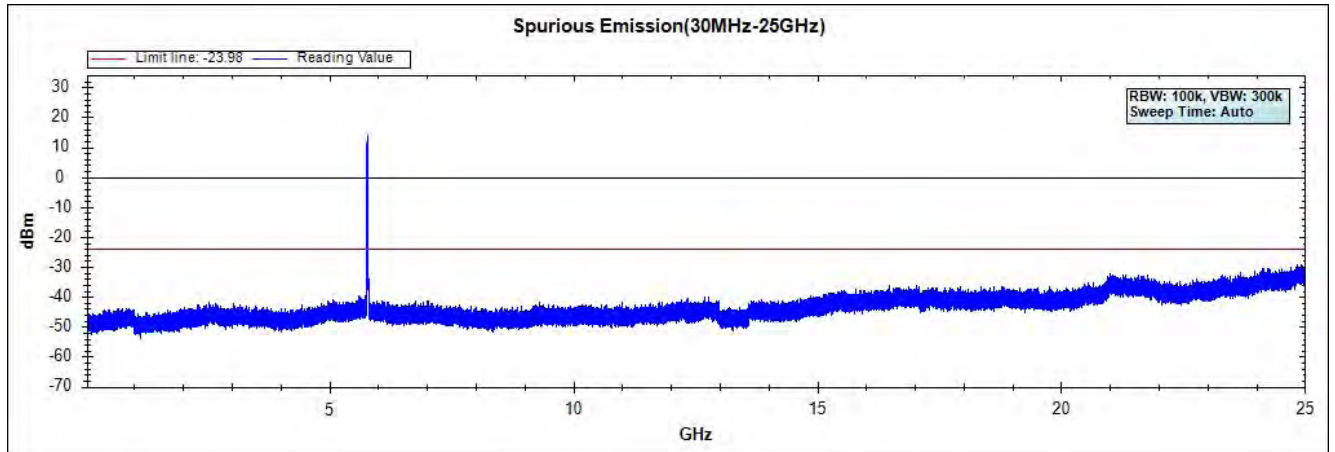


Channel 165 (5825MHz) 30MHz -40GHz-Chain B

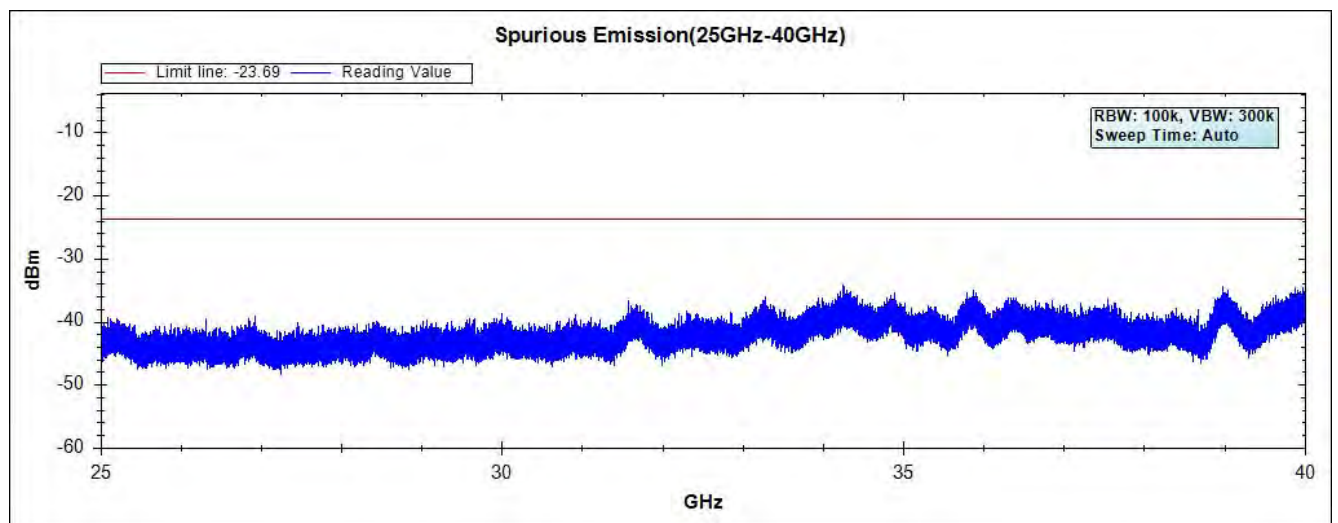
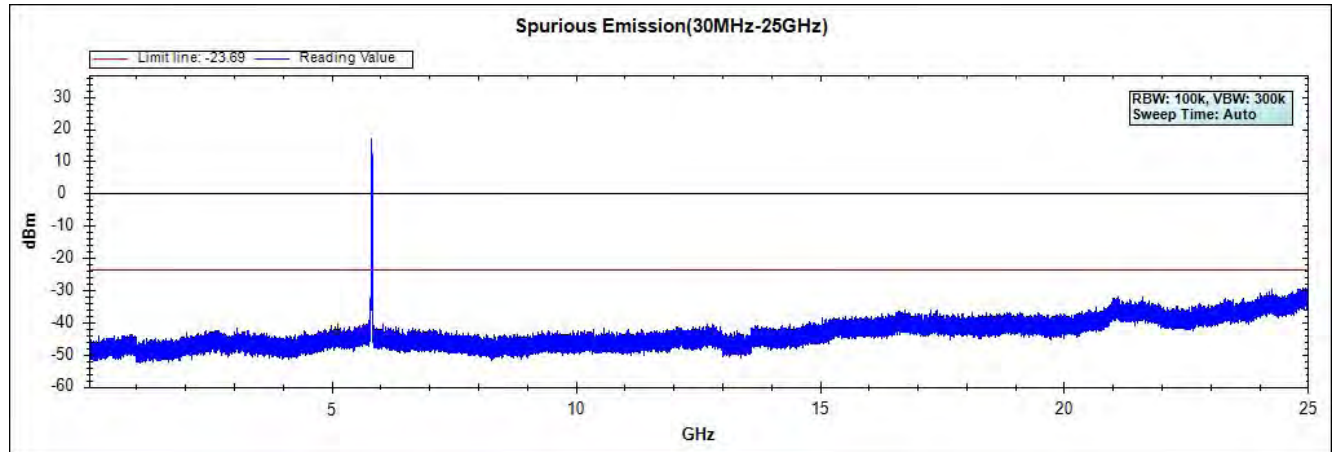


Product : 802.11 ac PCIe Module  
Test Item : RF Antenna Conducted Spurious  
Test Site : No.3 OATS  
Test Mode : Mode 2: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Dipole Antenna)



### Channel 49 (5745MHz) 30MHz -40GHz-Chain A

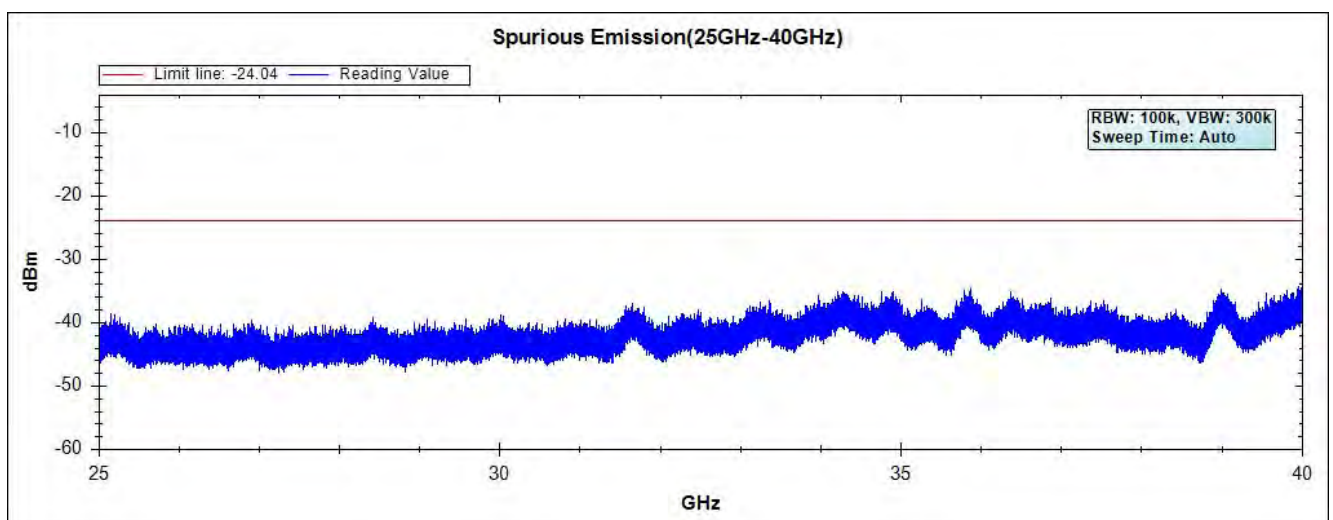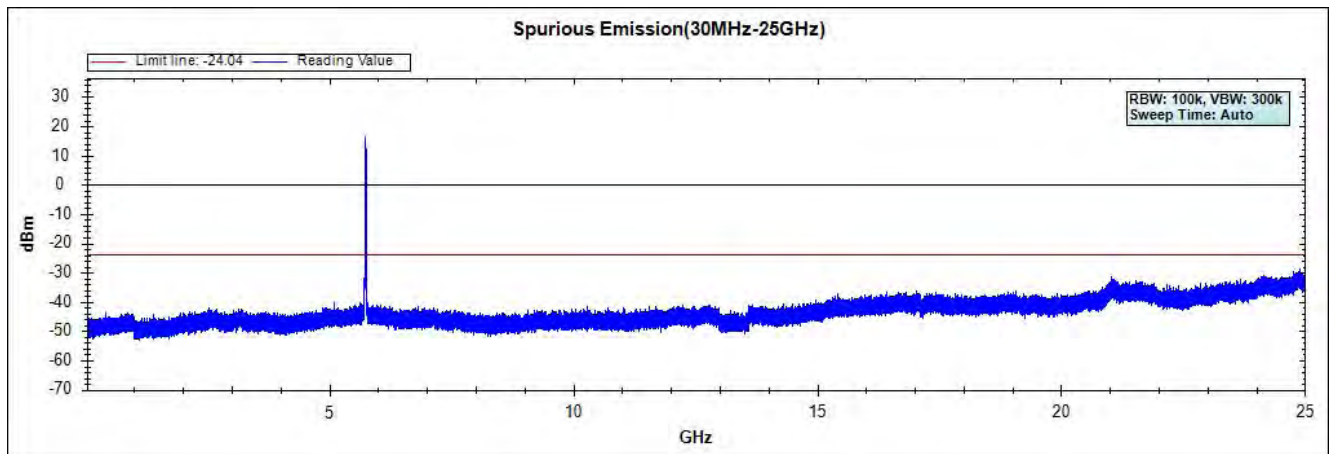



**Channel 157 (5785MHz) 30MHz -40GHz-Chain A**

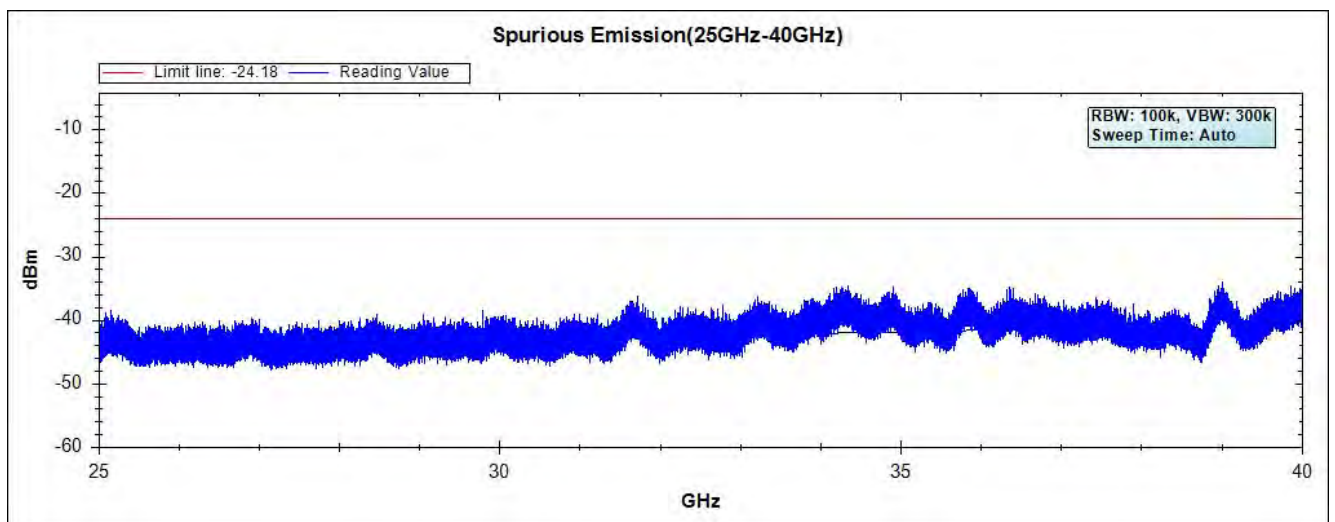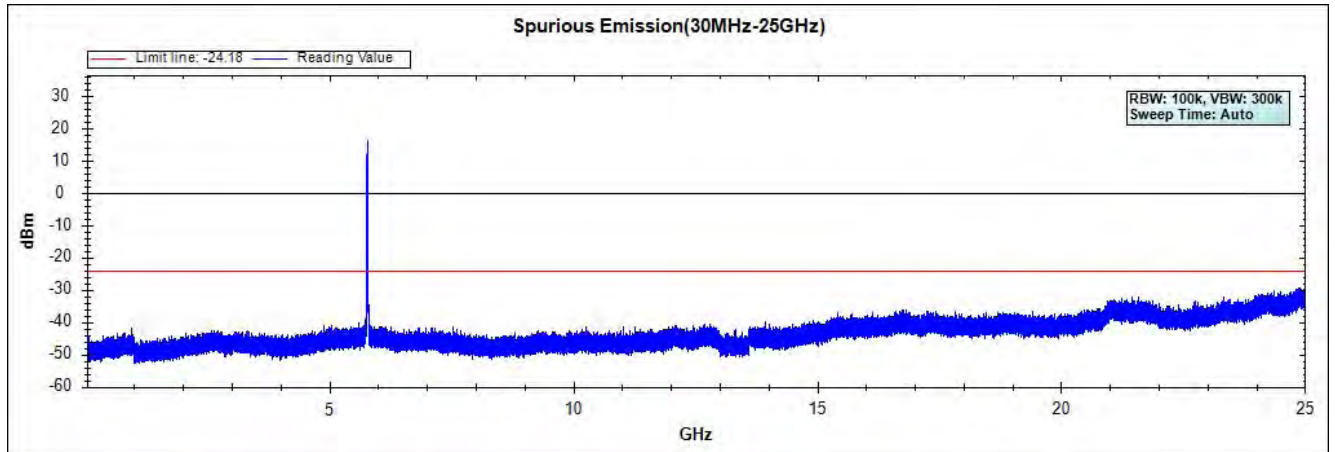



Channel 165 (5825MHz) 30MHz -40GHz-Chain A

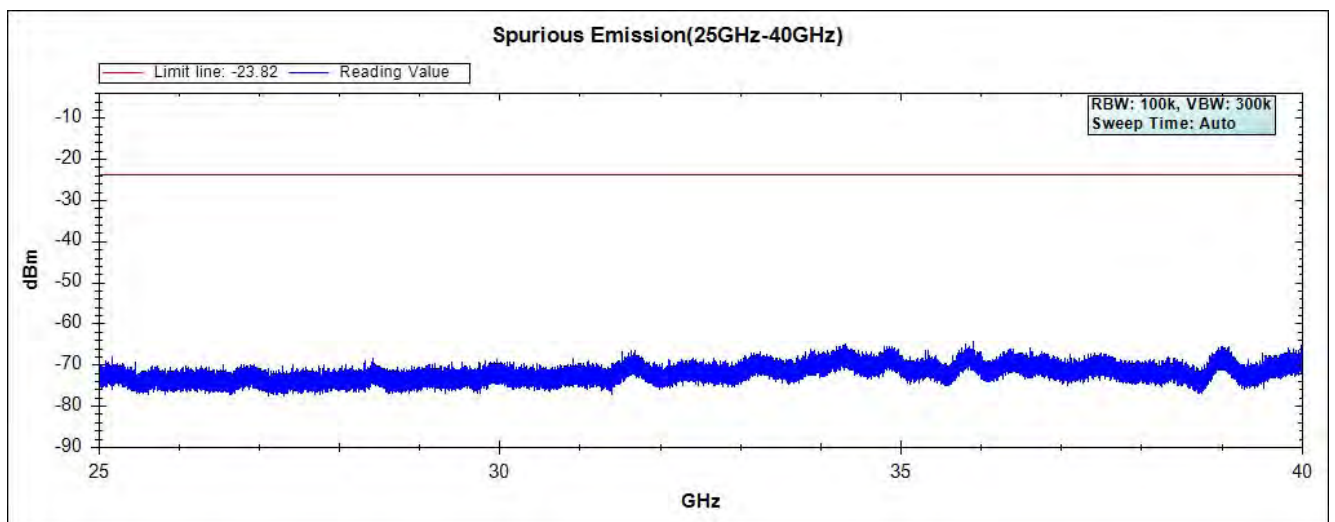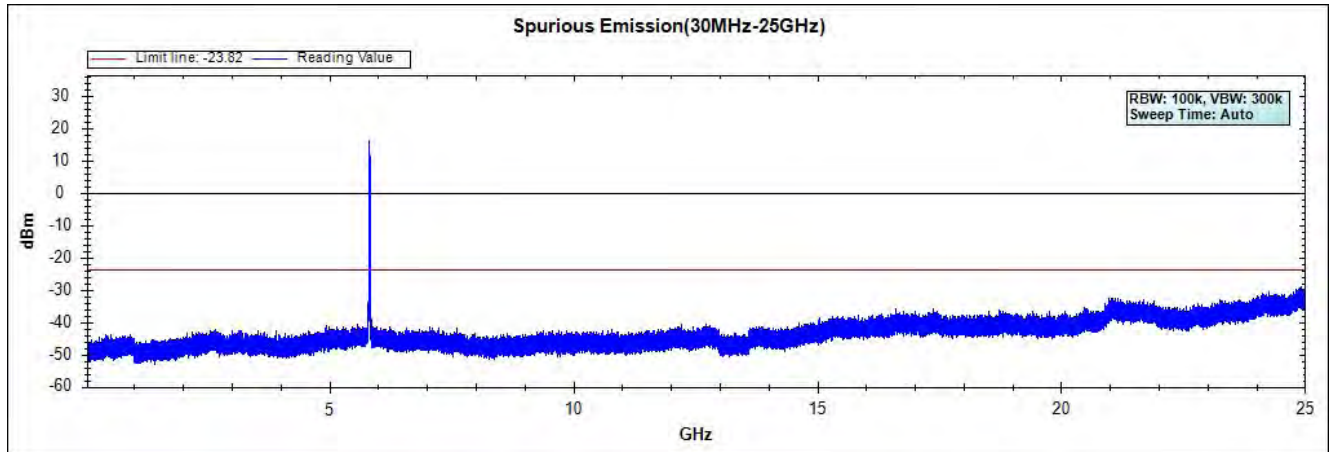



Channel 49 (5745MHz) 30MHz -40GHz-Chain B

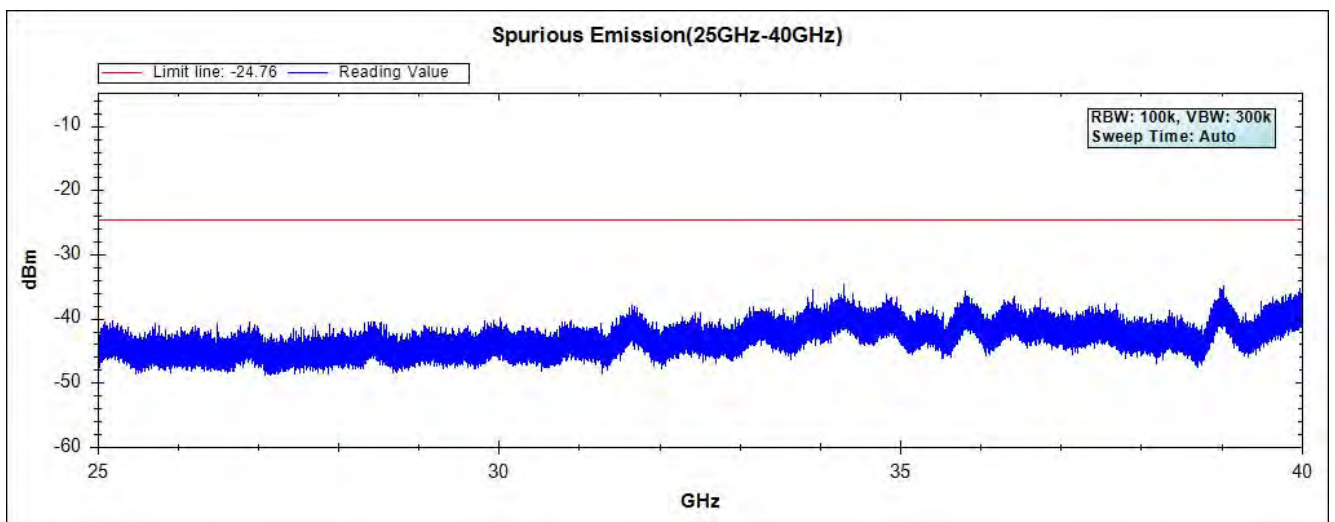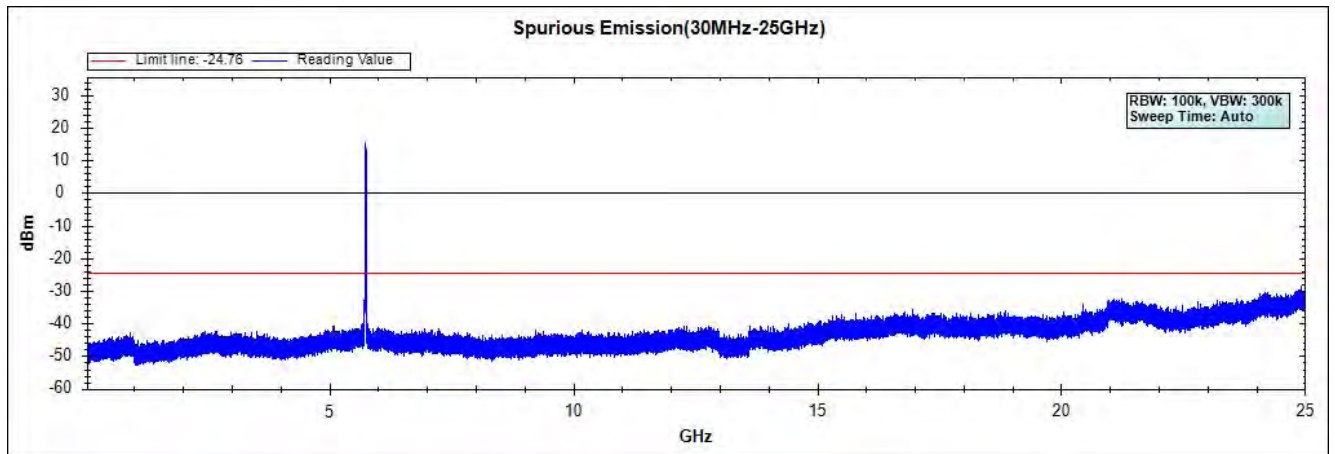

### Channel 157 (5785MHz) 30MHz -40GHz-Chain B

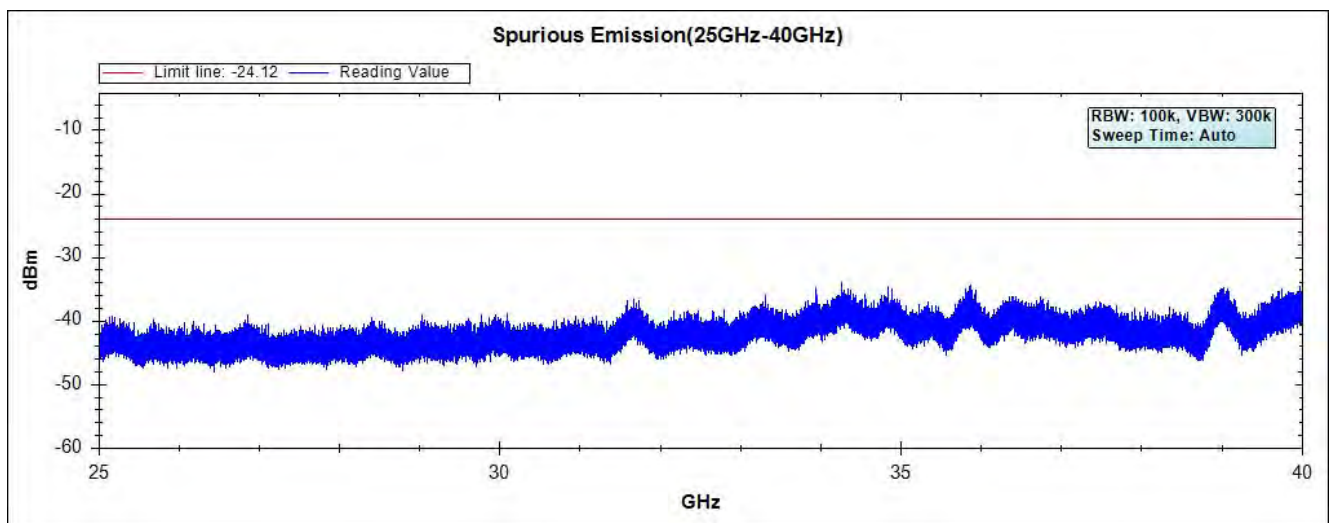
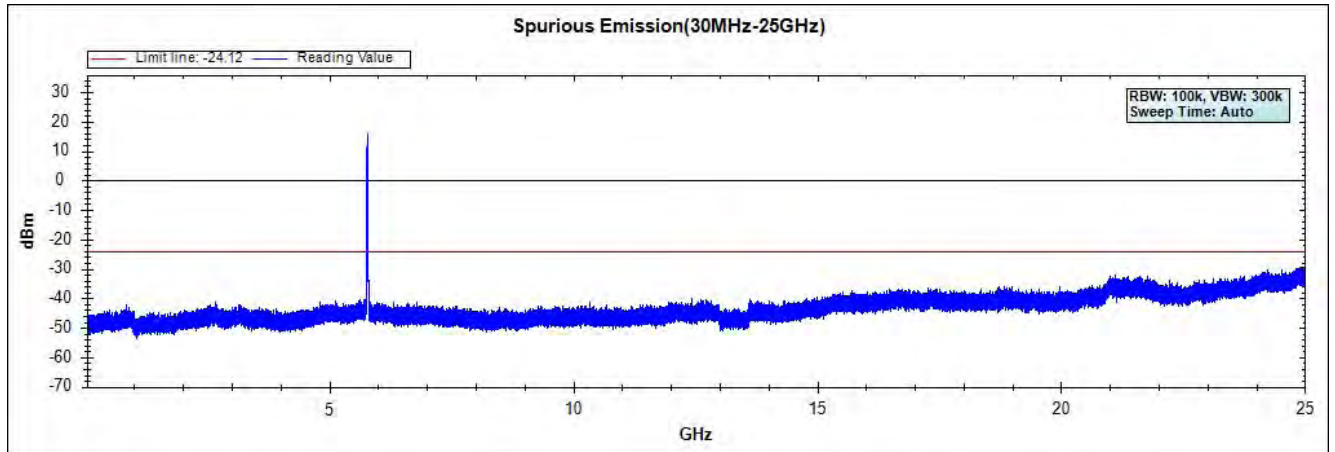


**Channel 165 (5825MHz) 30MHz -40GHz-Chain B**

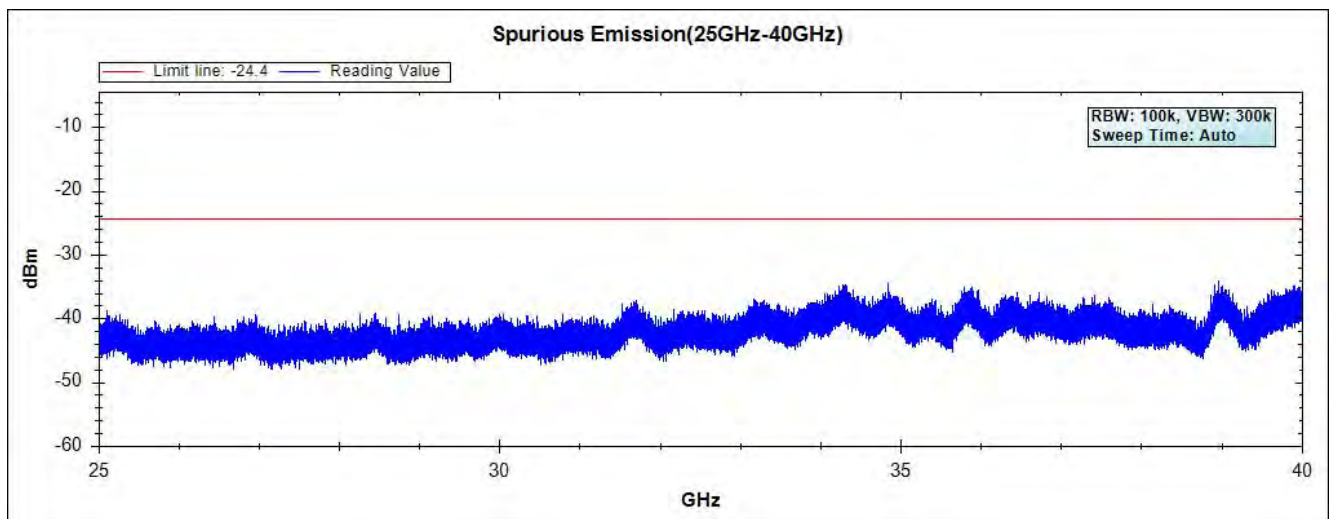
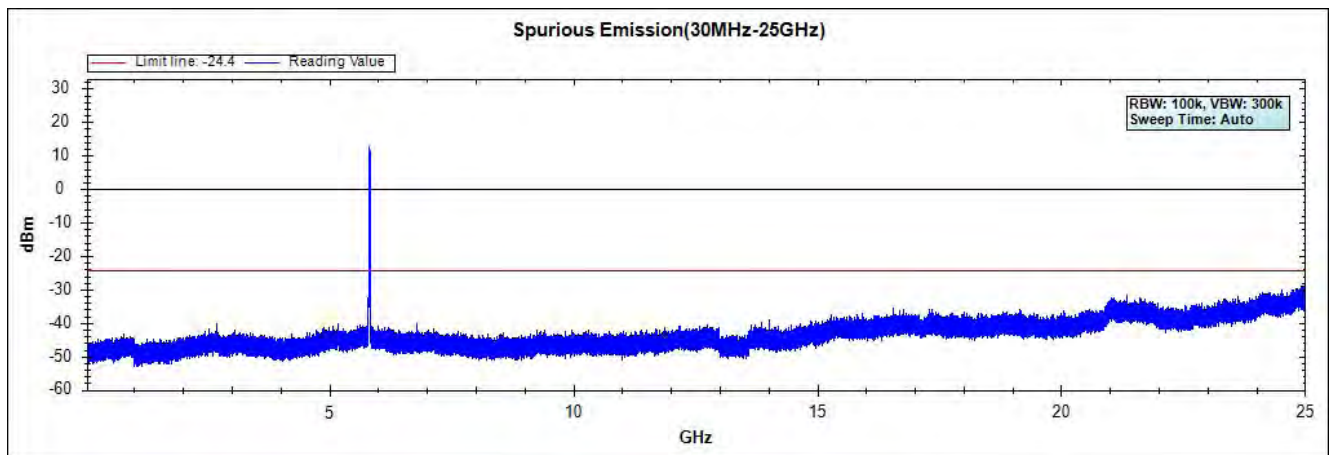


Product : 802.11 ac PCIe Module  
 Test Item : RF Antenna Conducted Spurious  
 Test Site : No.3 OATS  
 Test Mode : Mode 3: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Dipole Antenna)



**Channel 151 (5755MHz) 30MHz -40GHz-Chain A**

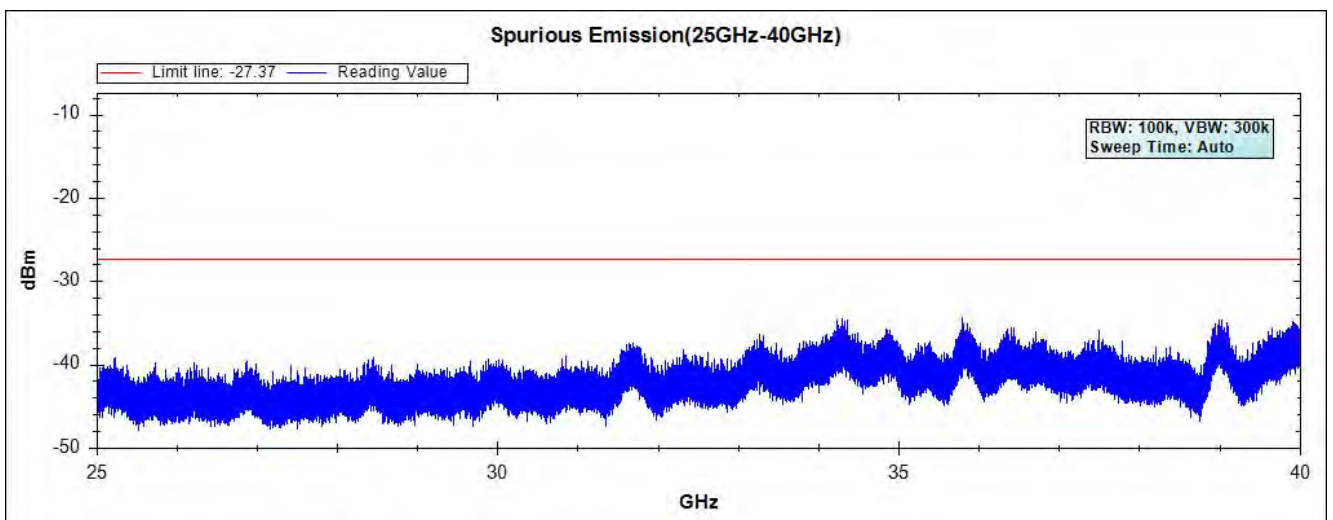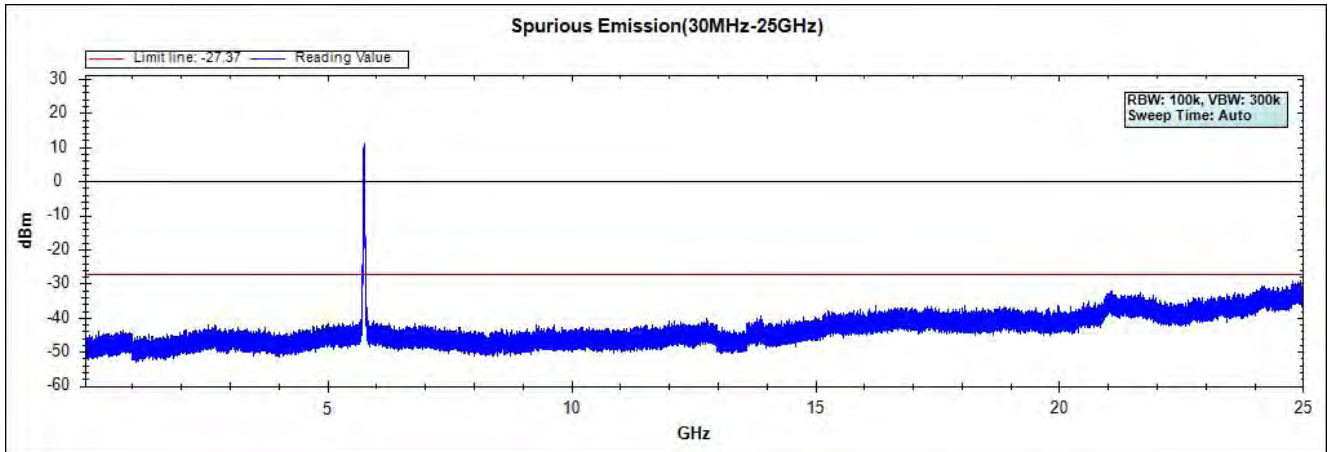



### Channel 159 (5795MHz) 30MHz -40GHz-Chain A

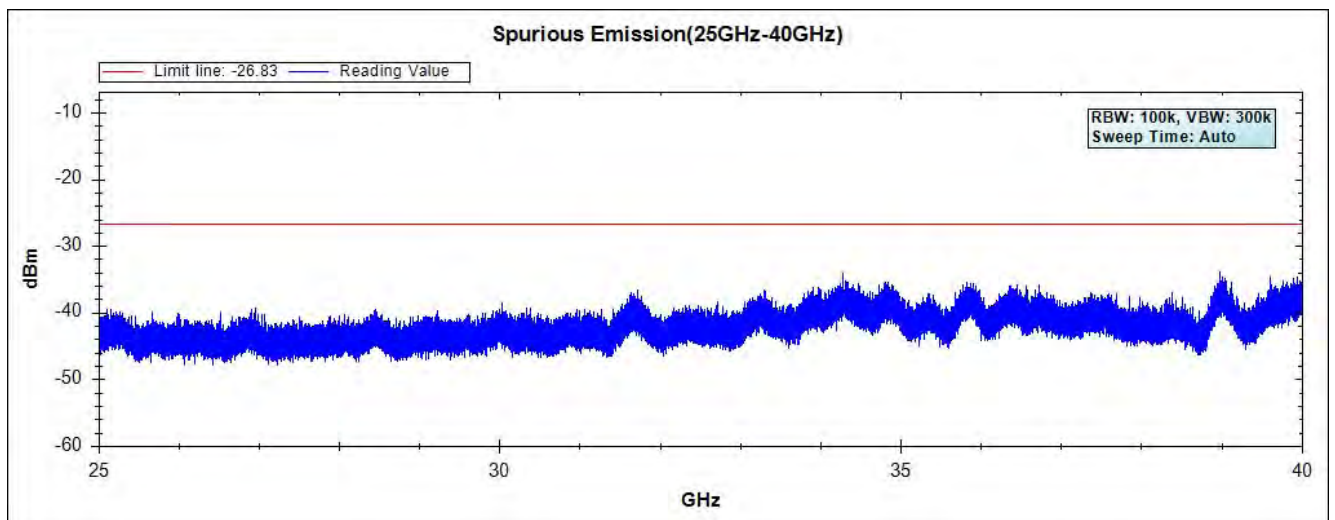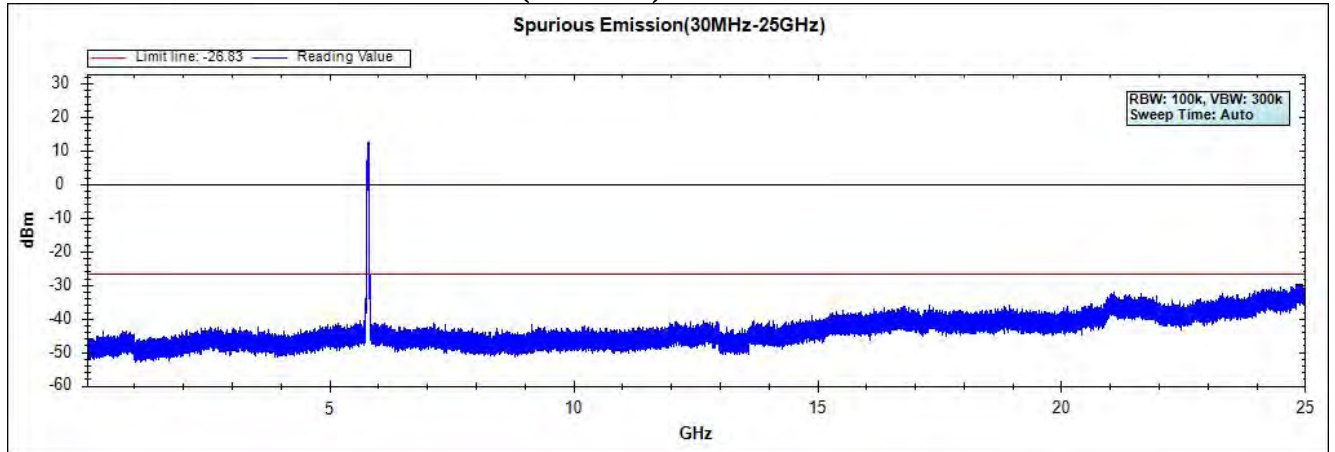

**Channel 151 (5755MHz) 30MHz -40GHz-Chain B**

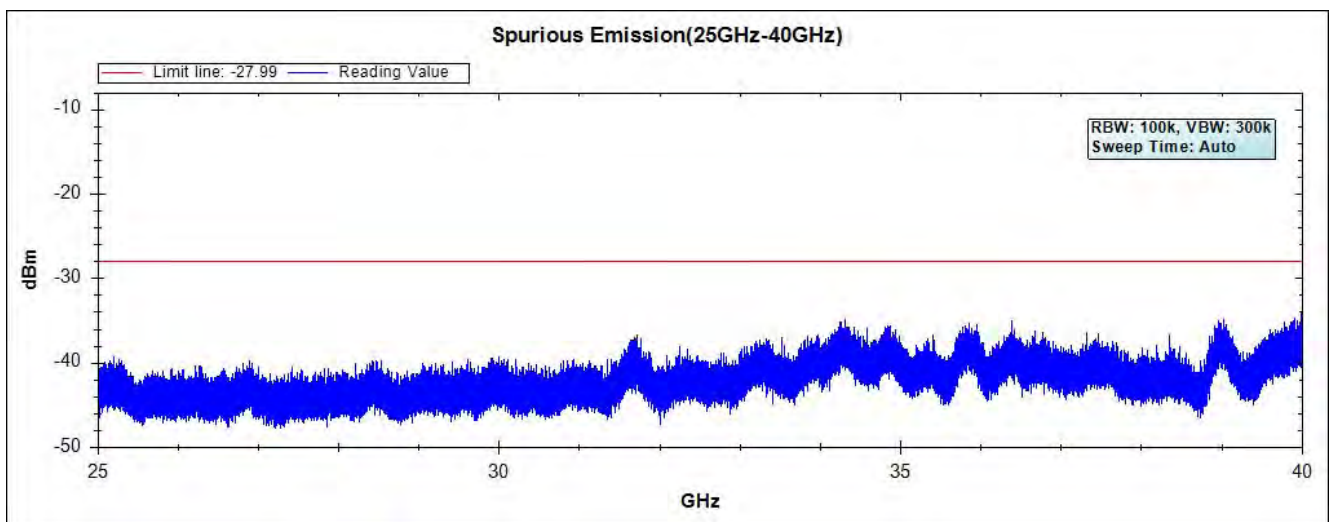
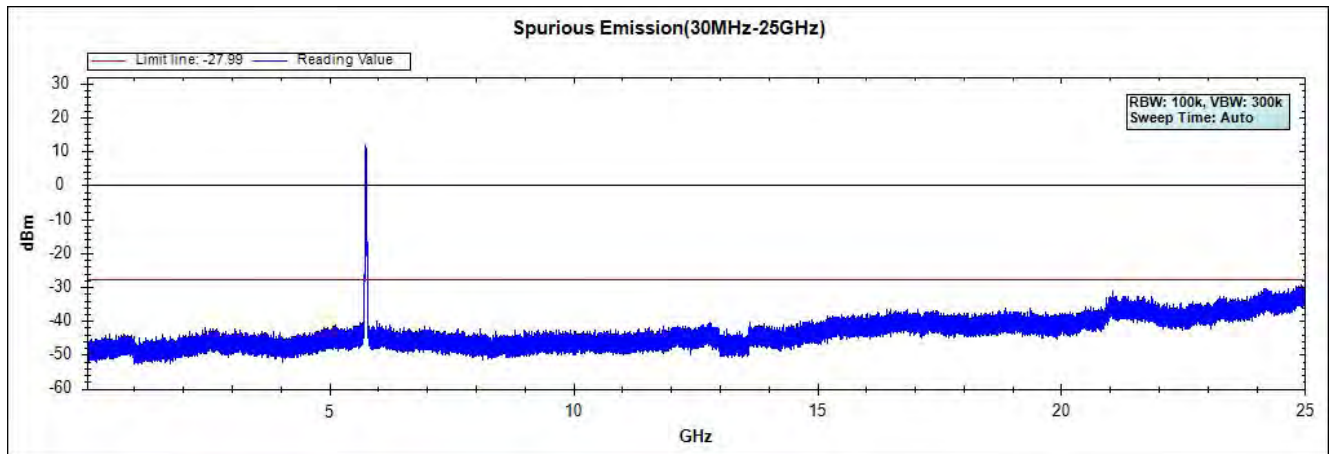


**Channel 159 (5795MHz) 30MHz -40GHz-Chain B**

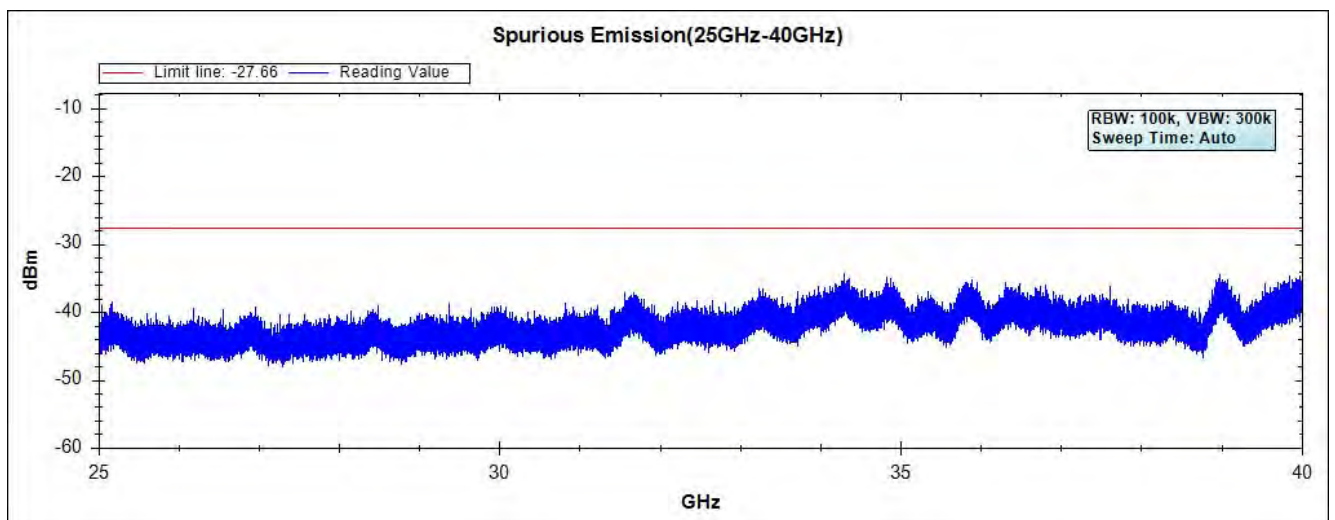
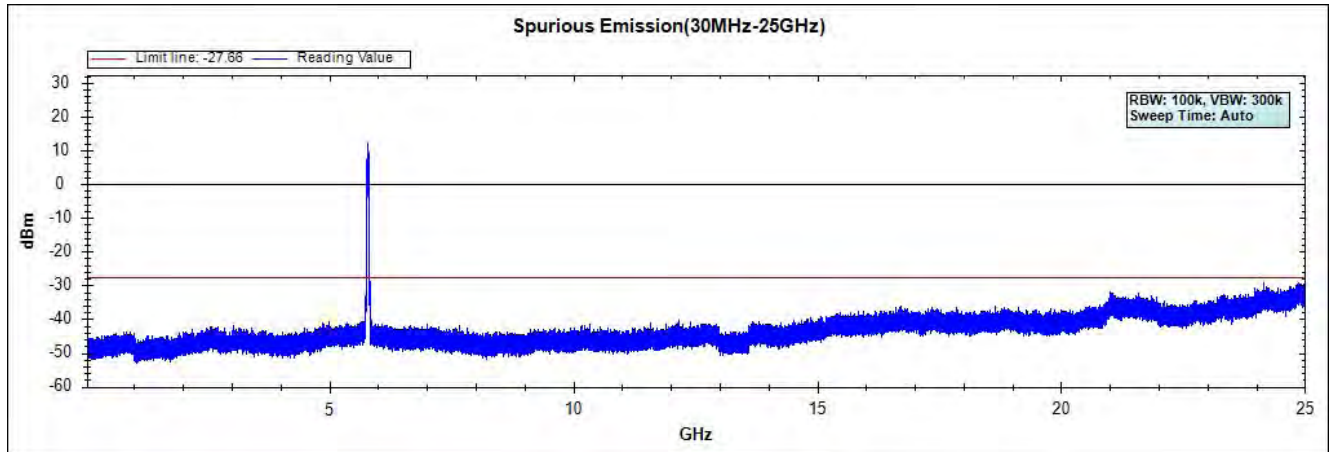


Product : 802.11 ac PCIe Module  
 Test Item : RF Antenna Conducted Spurious  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Dipole Antenna)

**Channel 1 (5780MHz) 30MHz -40GHz- Chaia A**

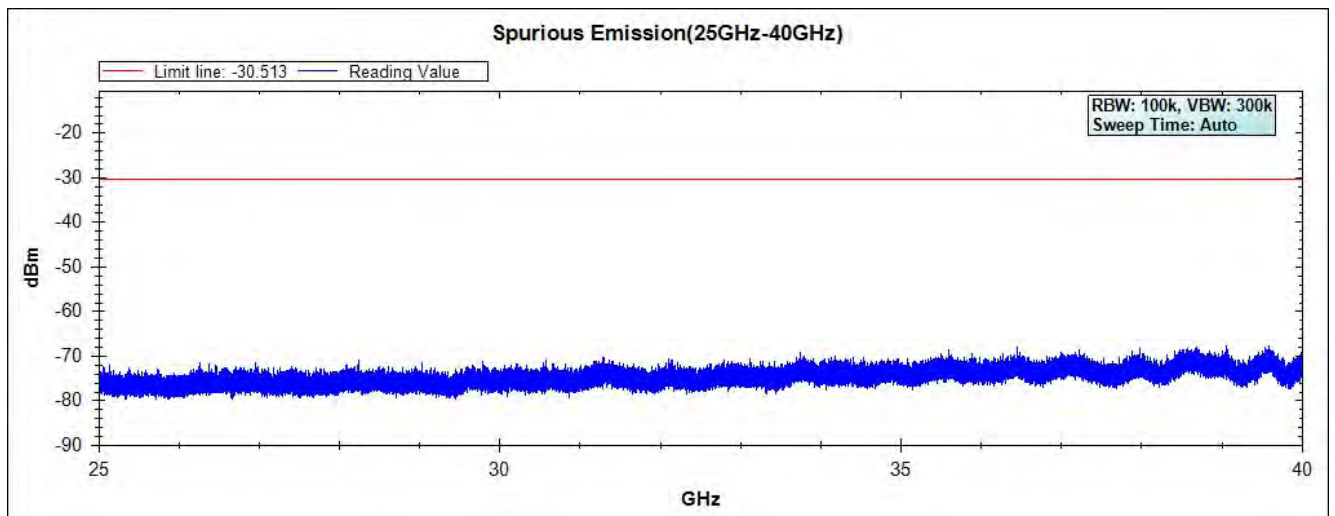
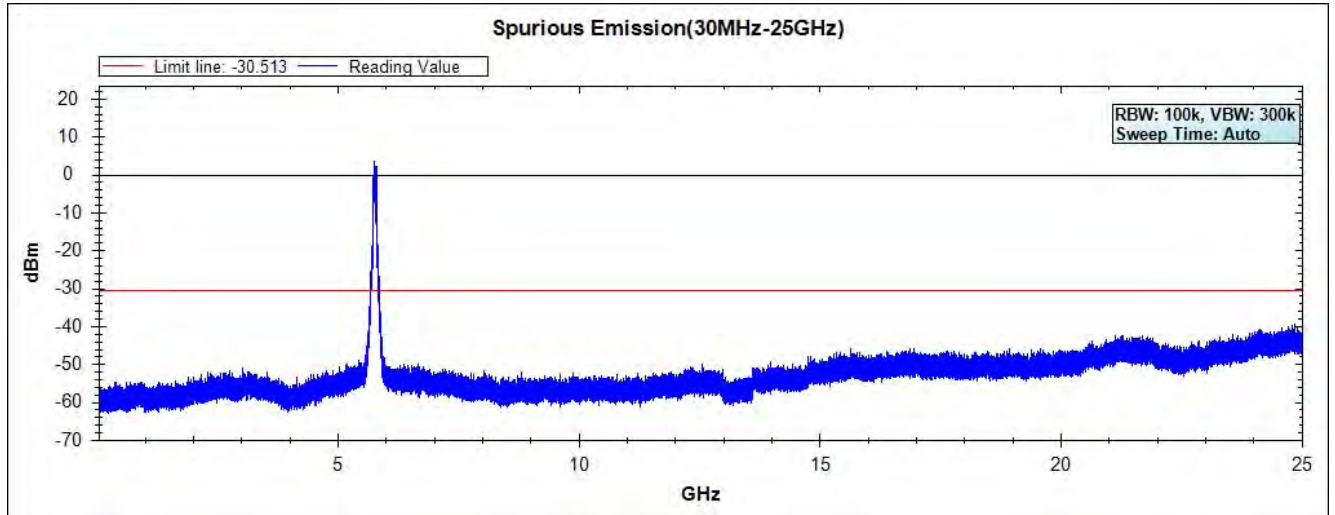


### Channel 1 (5780MHz) 30MHz -40GHz- Chaia B

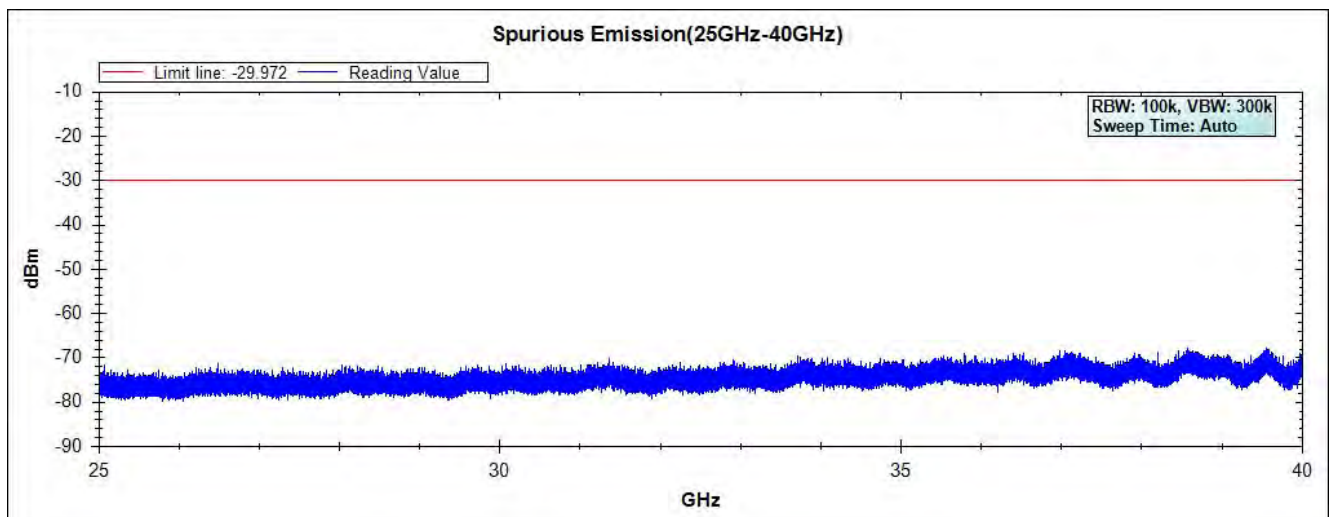
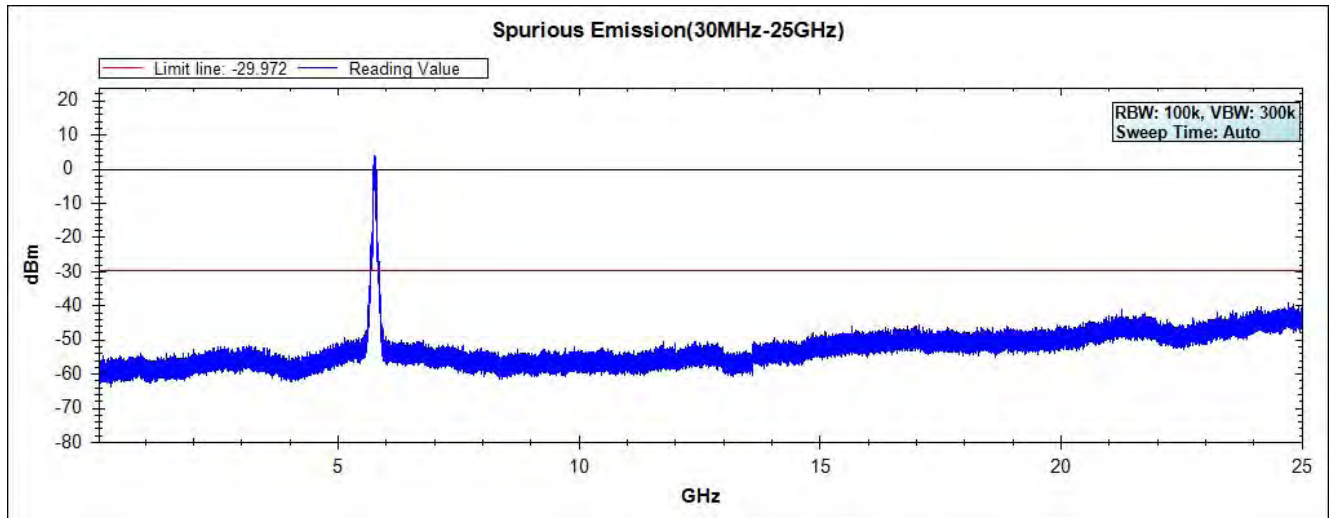


Product : 802.11 ac PCIe Module  
Test Item : RF Antenna Conducted Spurious  
Test Site : No.3 OATS  
Test Mode : Mode 5: Transmit - 802.11a\_6Mbps(Grid DISH Antenna)



**Channel 149 (5745MHz) 30MHz -40GHz-Chain A**

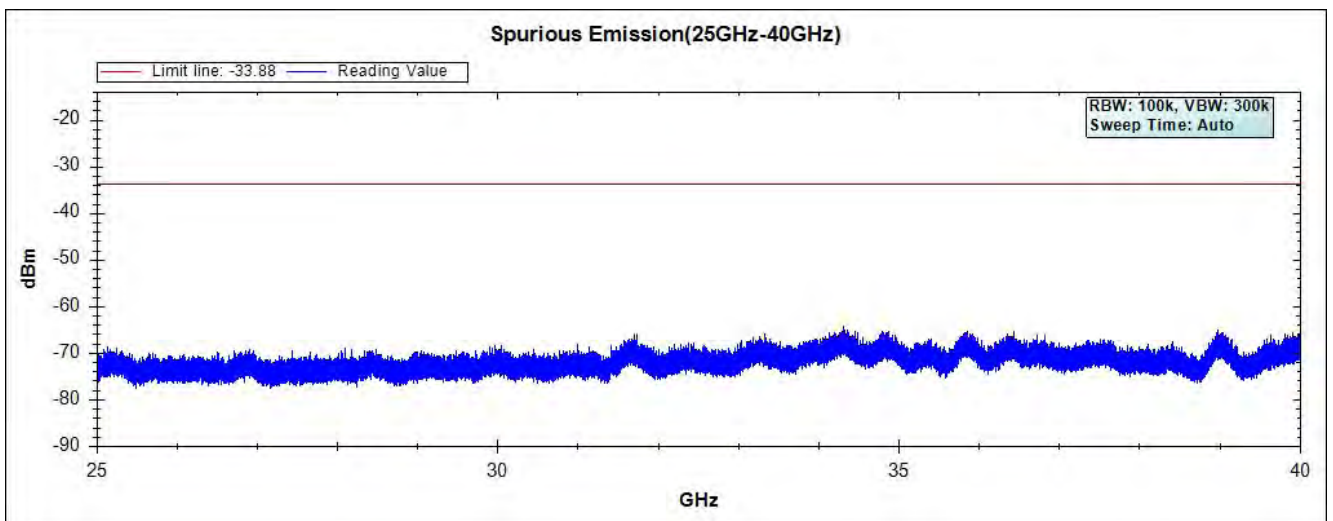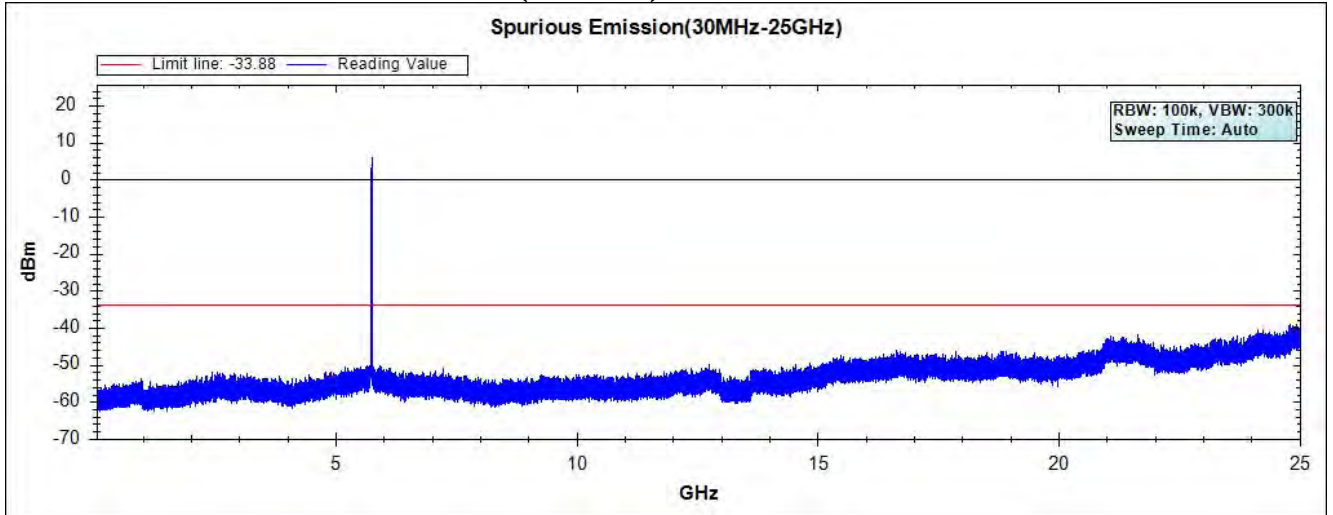



### Channel 157 (5785MHz) 30MHz -40GHz-Chain A

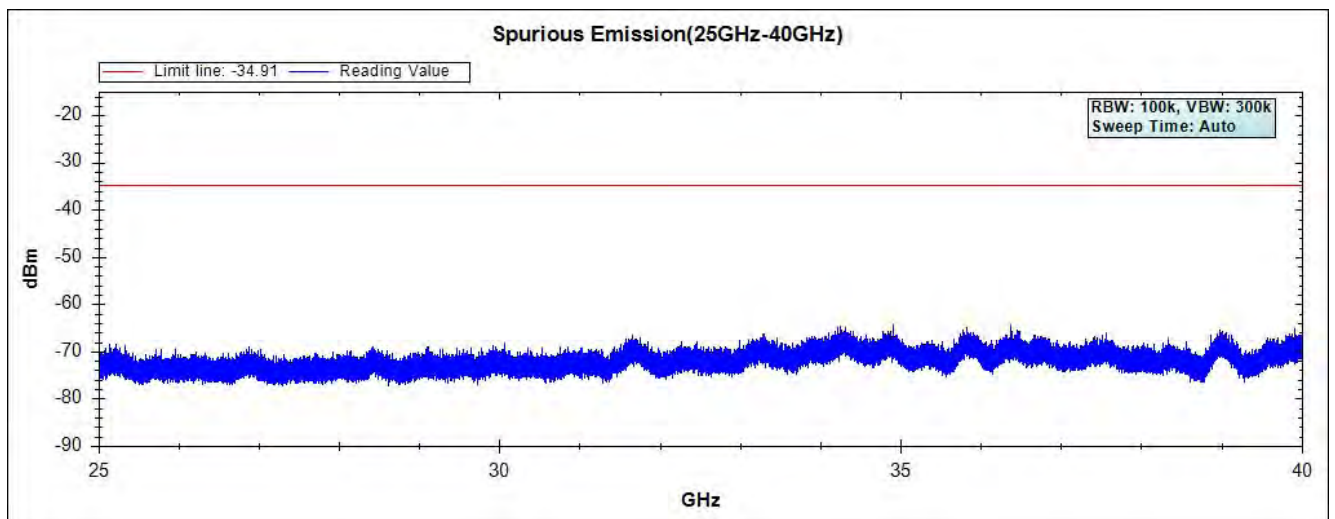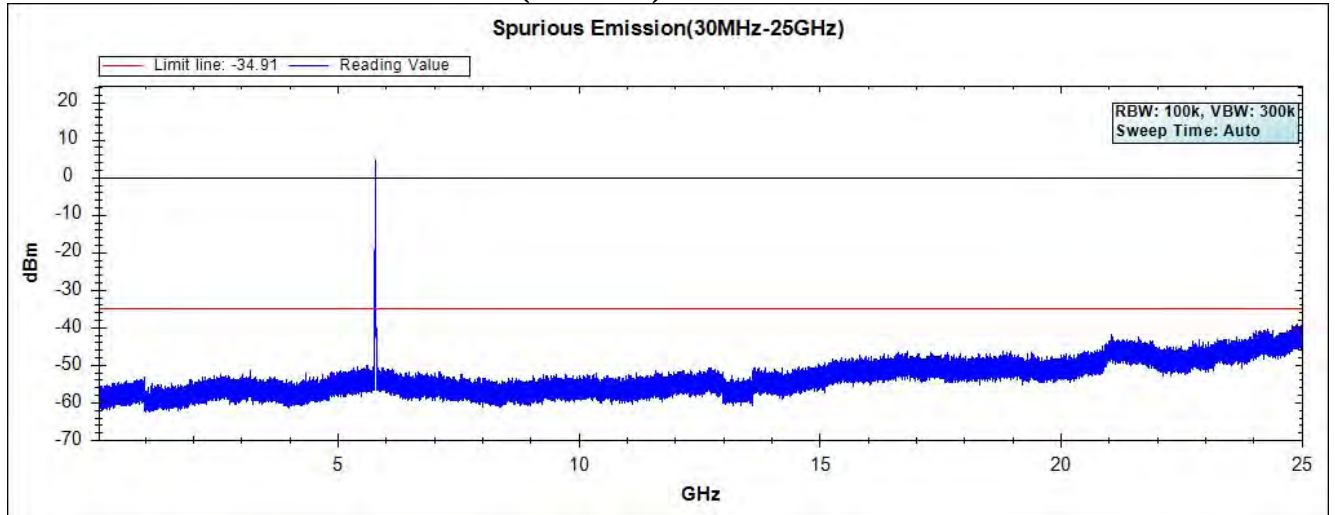



**Channel 165 (5825MHz) 30MHz -40GHz-Chain A**

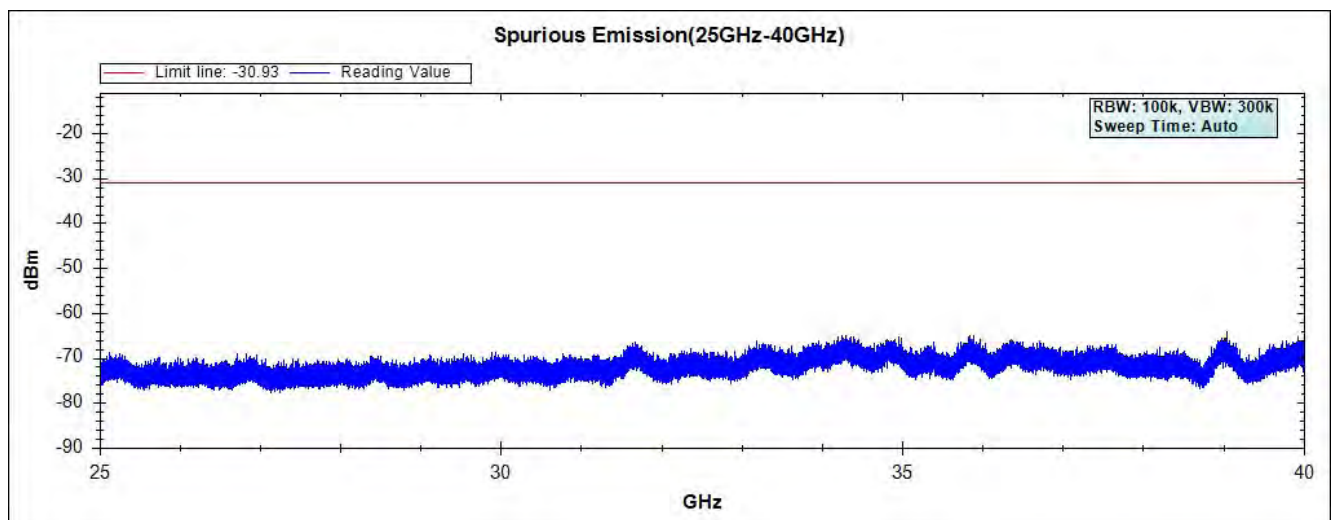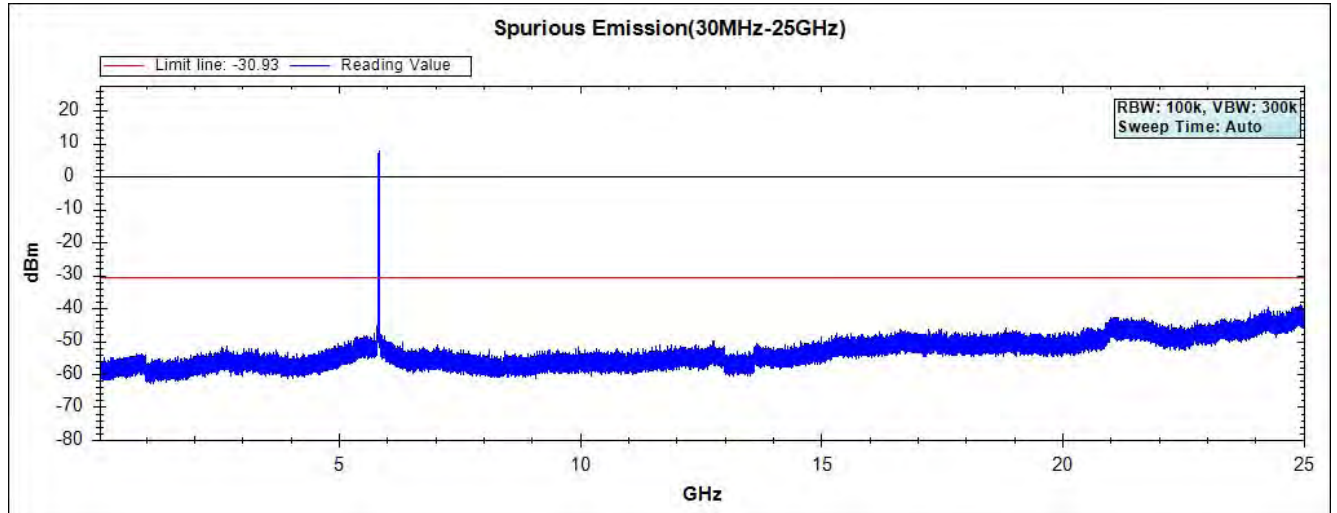



### Channel 149 (5745MHz) 30MHz -40GHz-Chain B

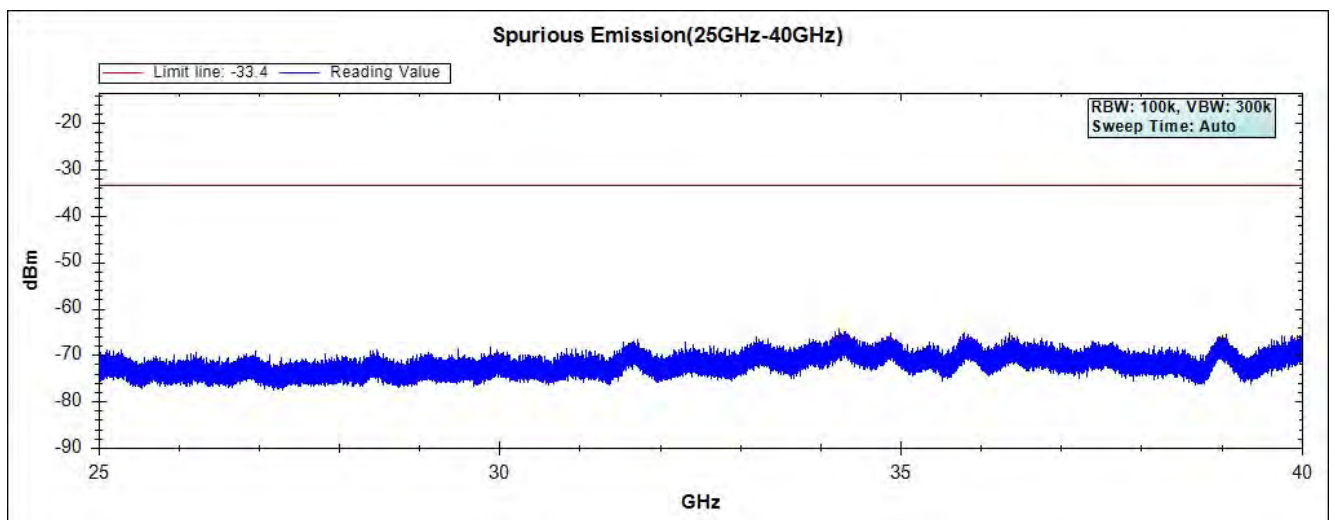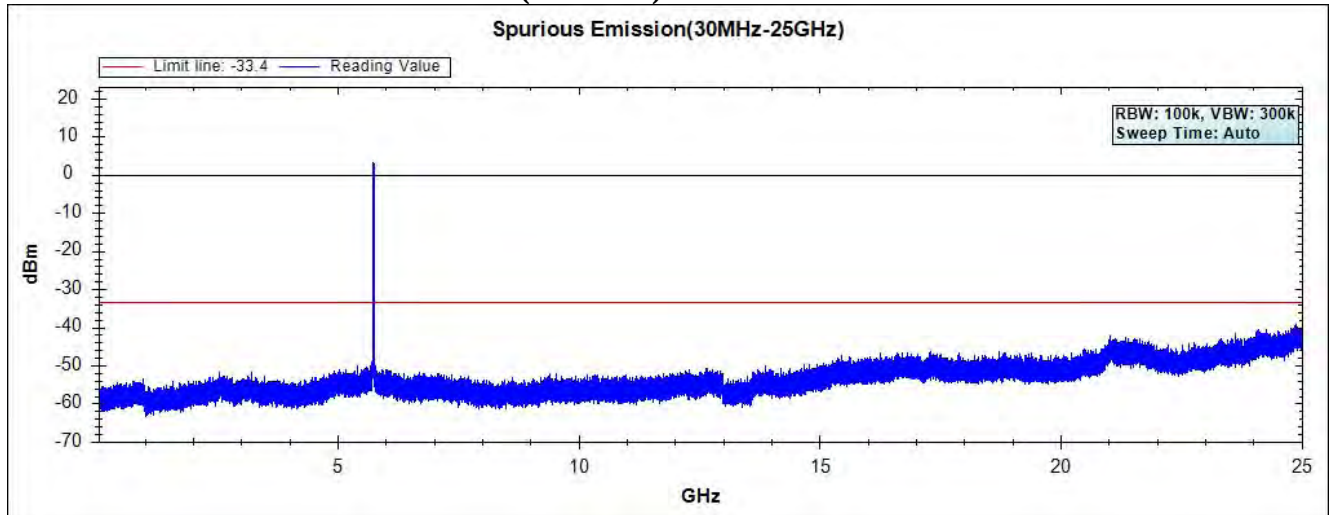

**Channel 157 (5785MHz) 30MHz -40GHz-Chain B**

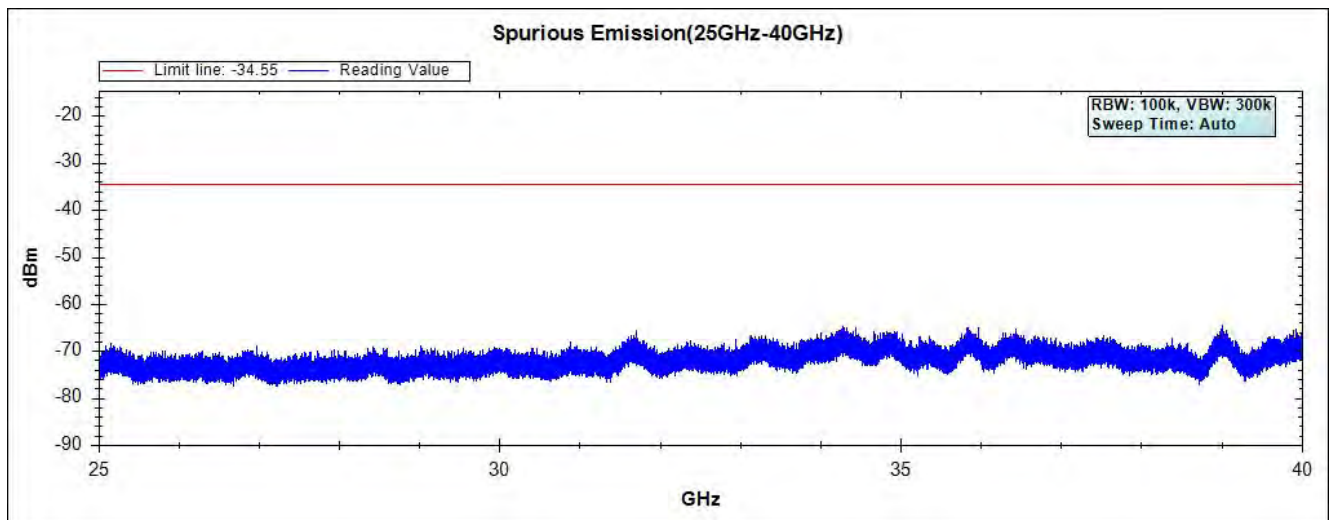
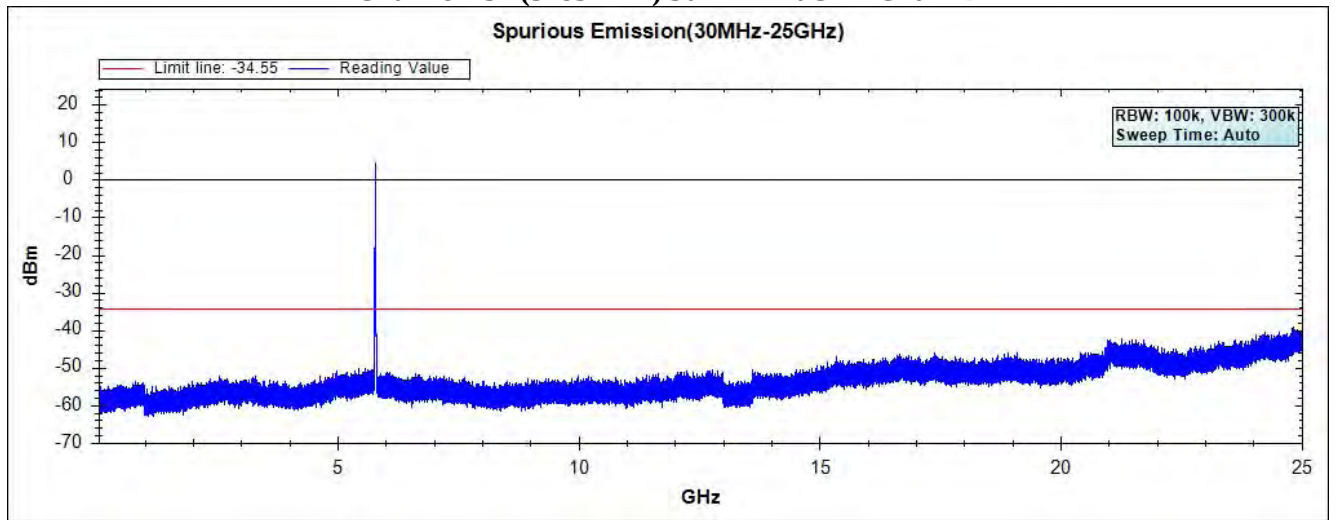


Channel 165 (5825MHz) 30MHz -40GHz-Chain B

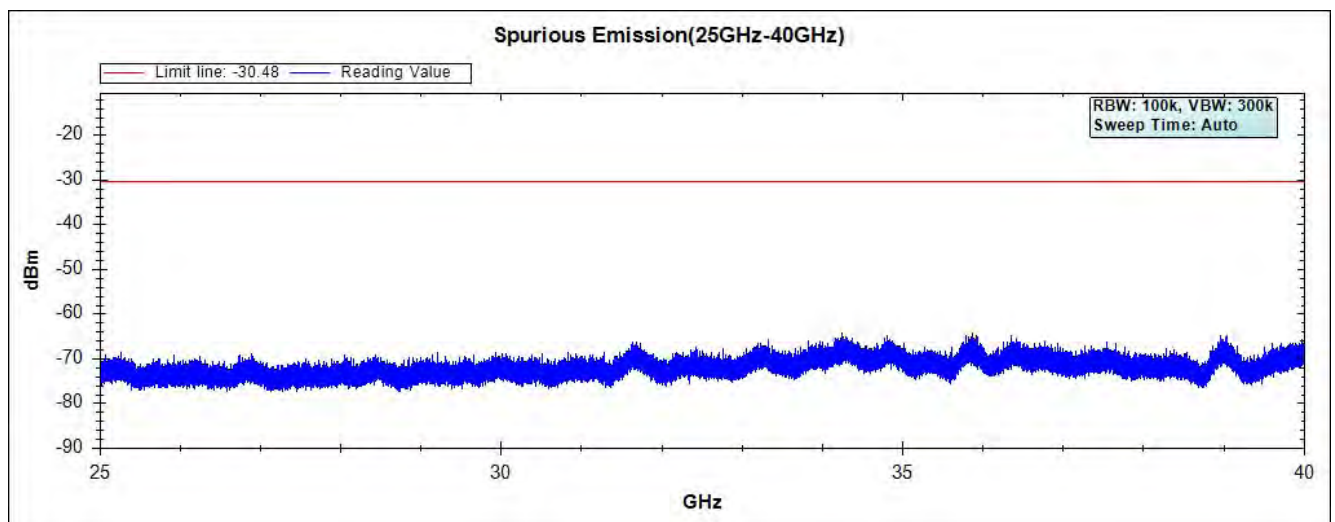
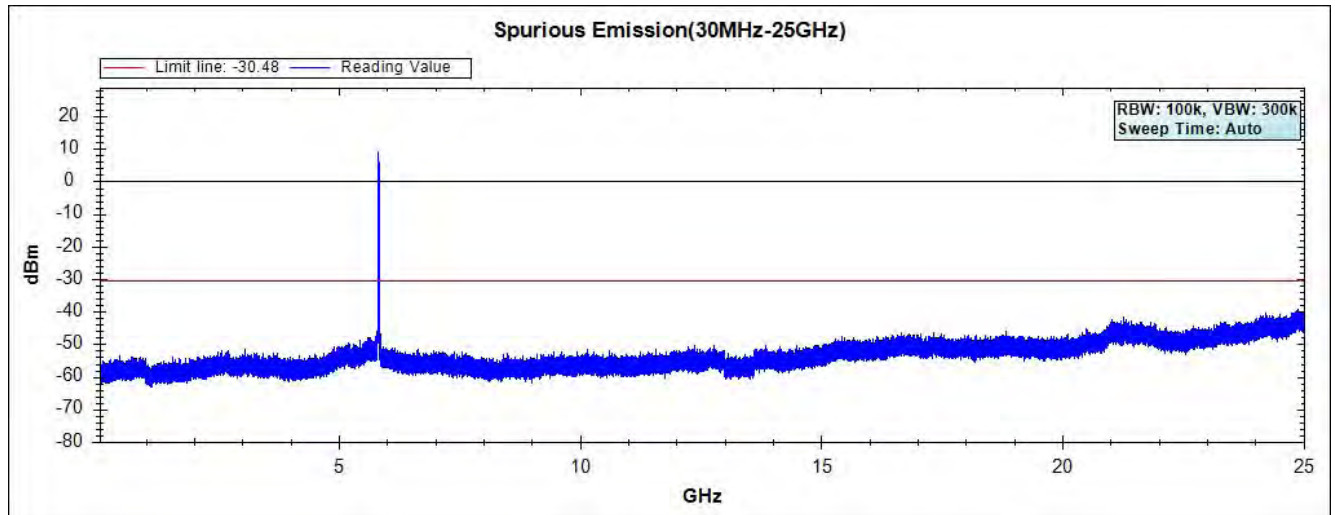


Product : 802.11 ac PCIe Module  
Test Item : RF Antenna Conducted Spurious  
Test Site : No.3 OATS  
Test Mode : Mode 6: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Grid DISH Antenna)



**Channel 49 (5745MHz) 30MHz -40GHz-Chain A**

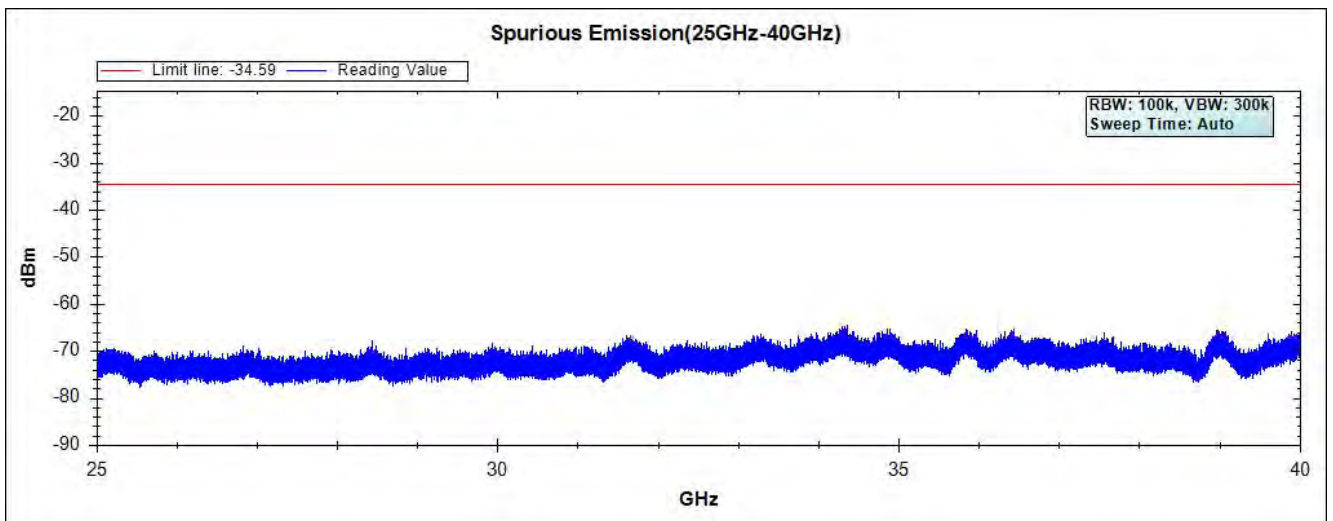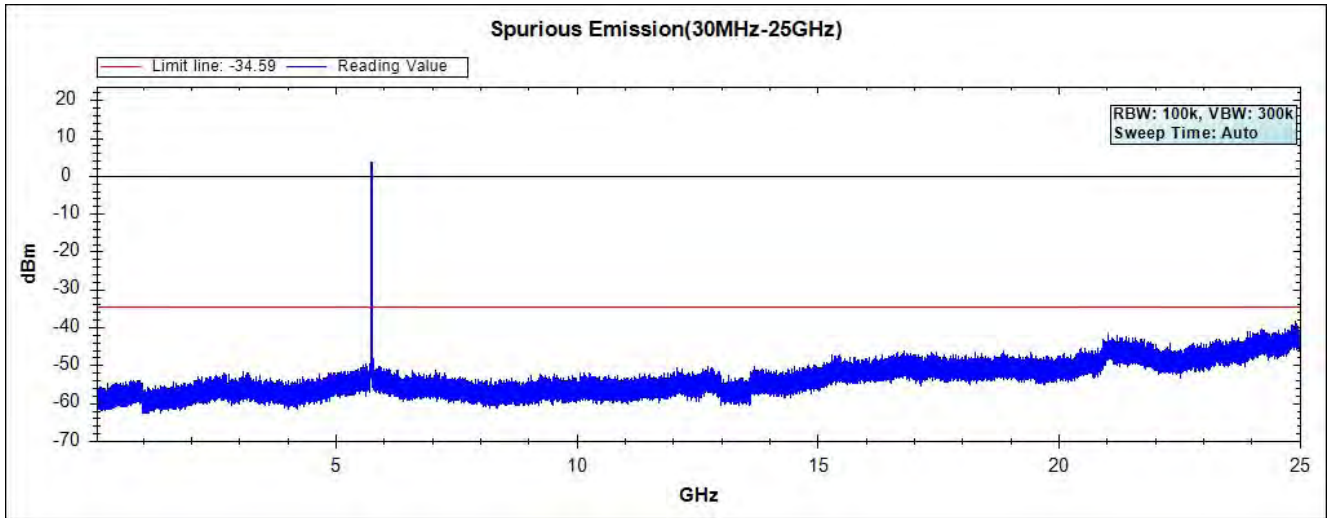



### Channel 157 (5785MHz) 30MHz -40GHz-Chain A

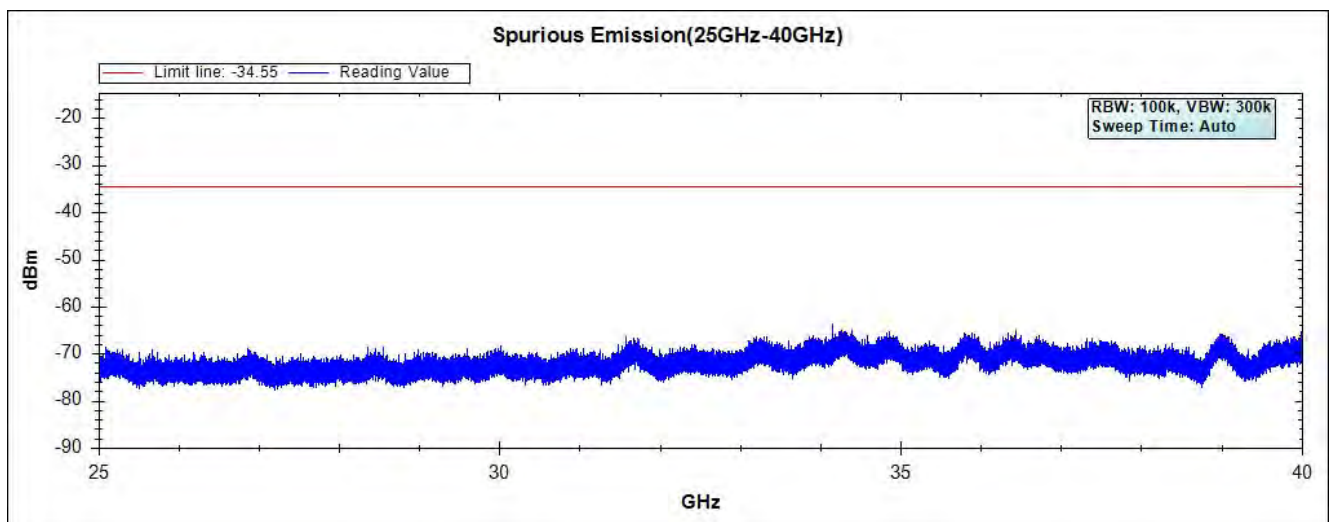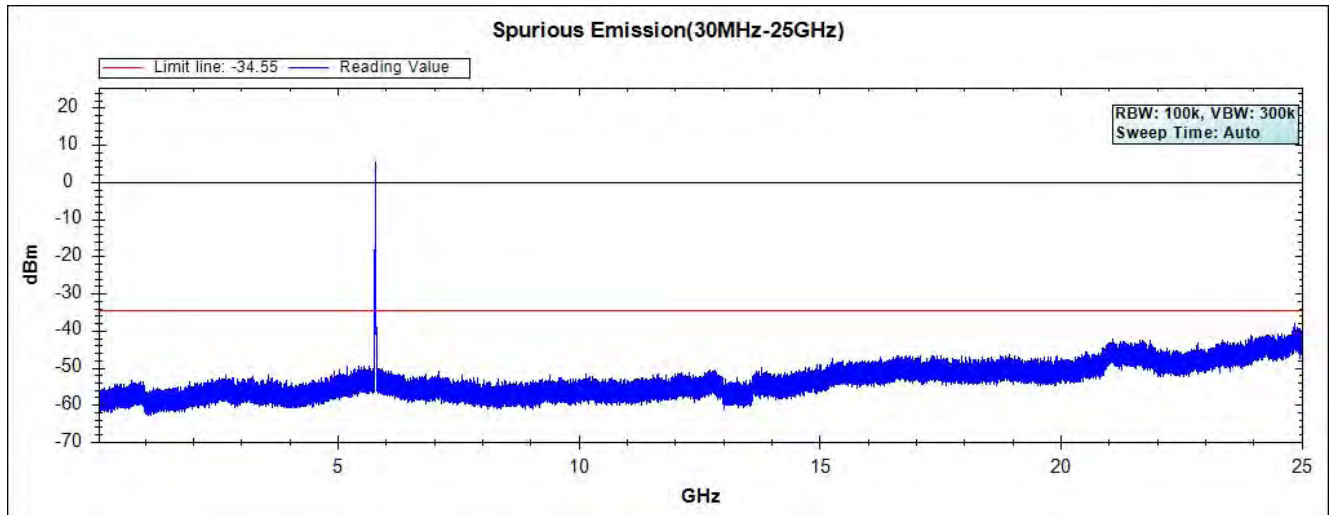



Channel 165 (5825MHz) 30MHz -40GHz-Chain A

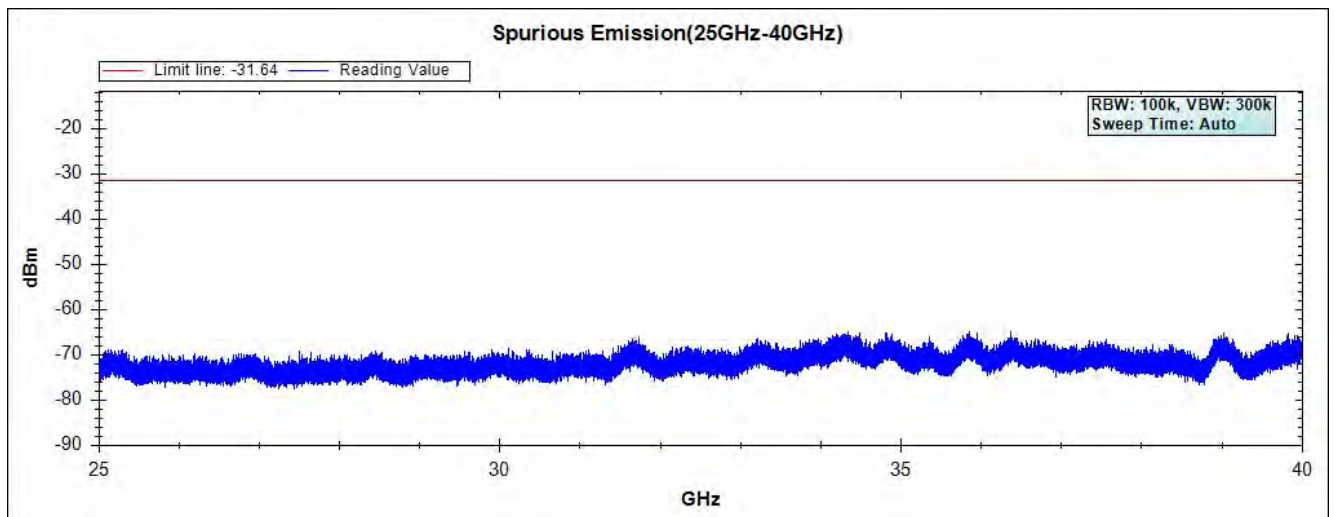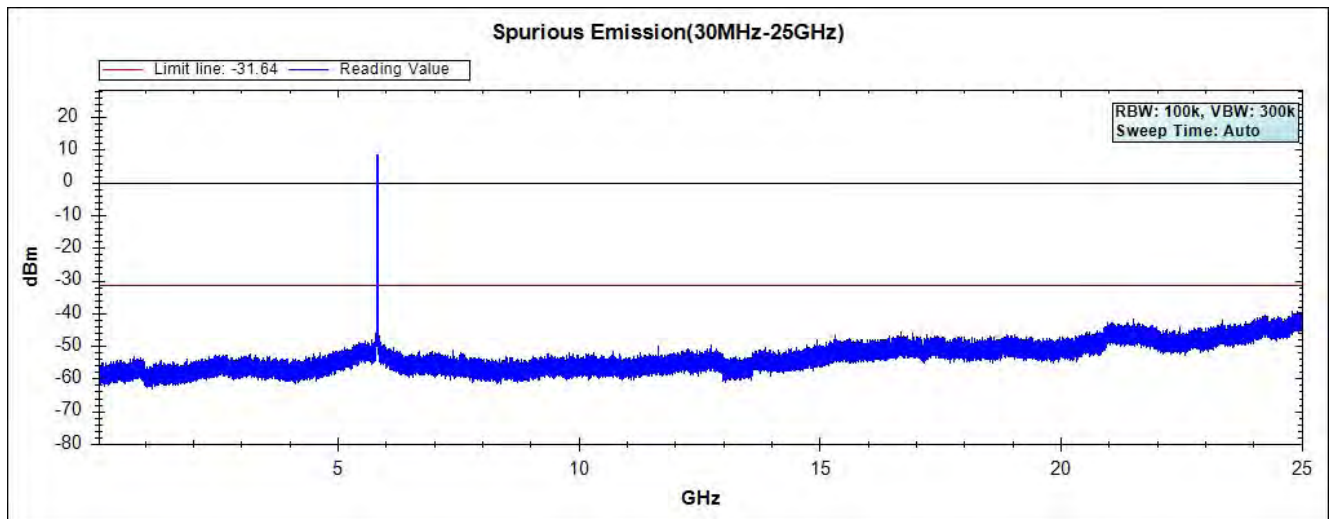



Channel 49 (5745MHz) 30MHz -40GHz-Chain B

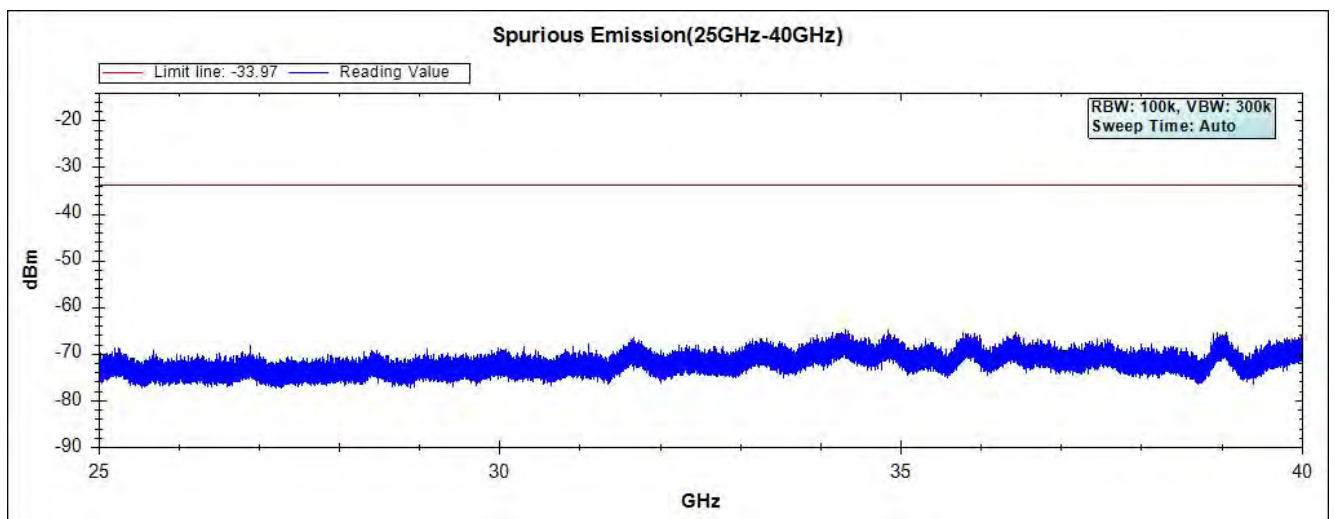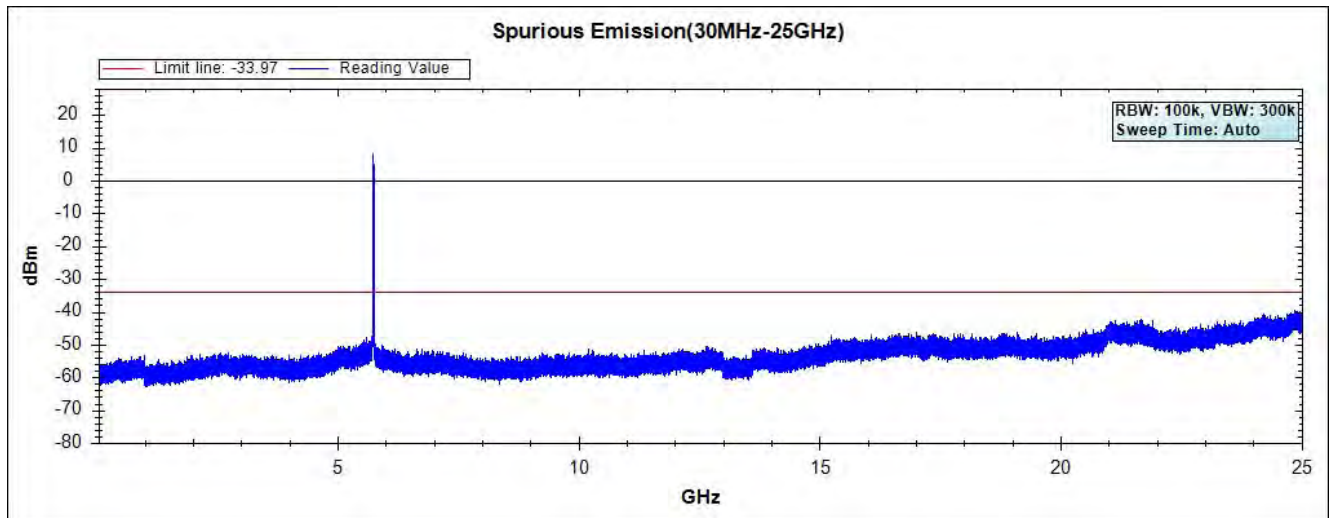

### Channel 157 (5785MHz) 30MHz -40GHz-Chain B

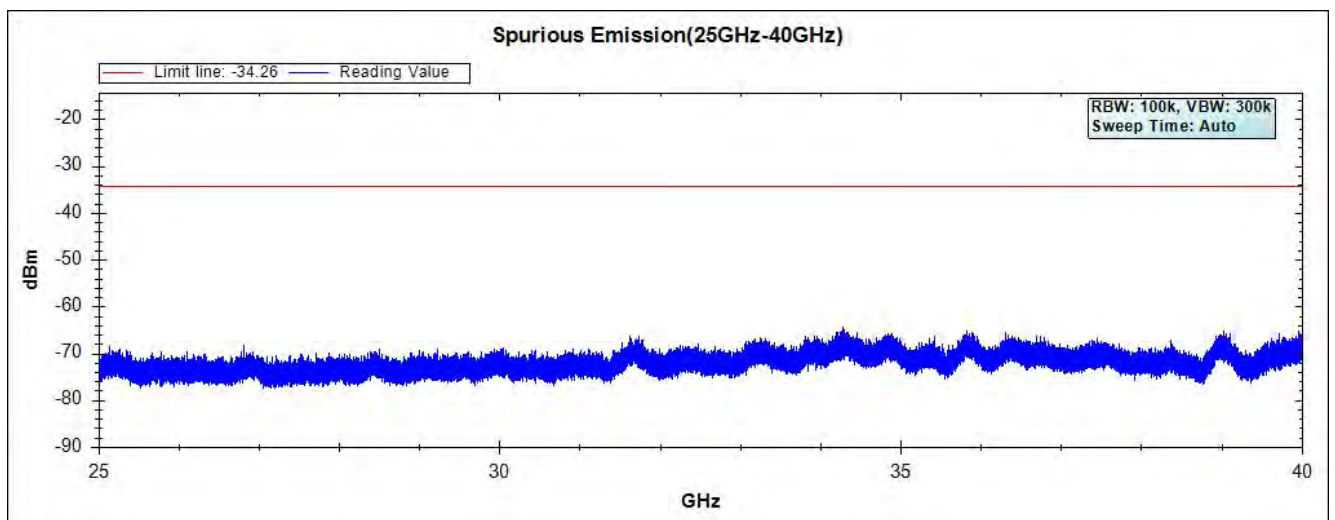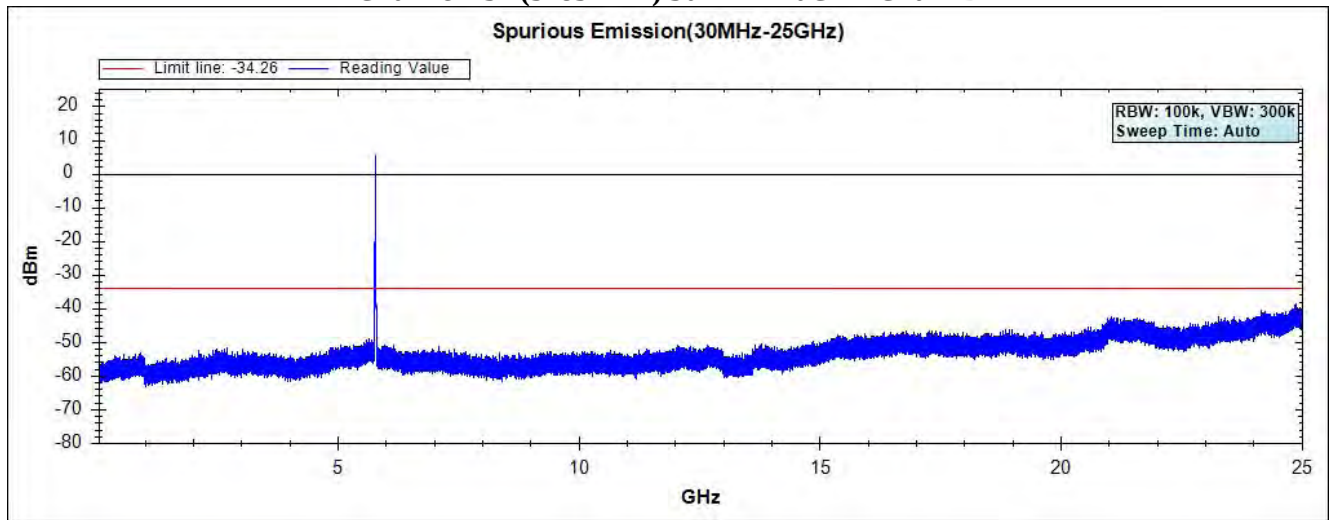


**Channel 165 (5825MHz) 30MHz -40GHz-Chain B**

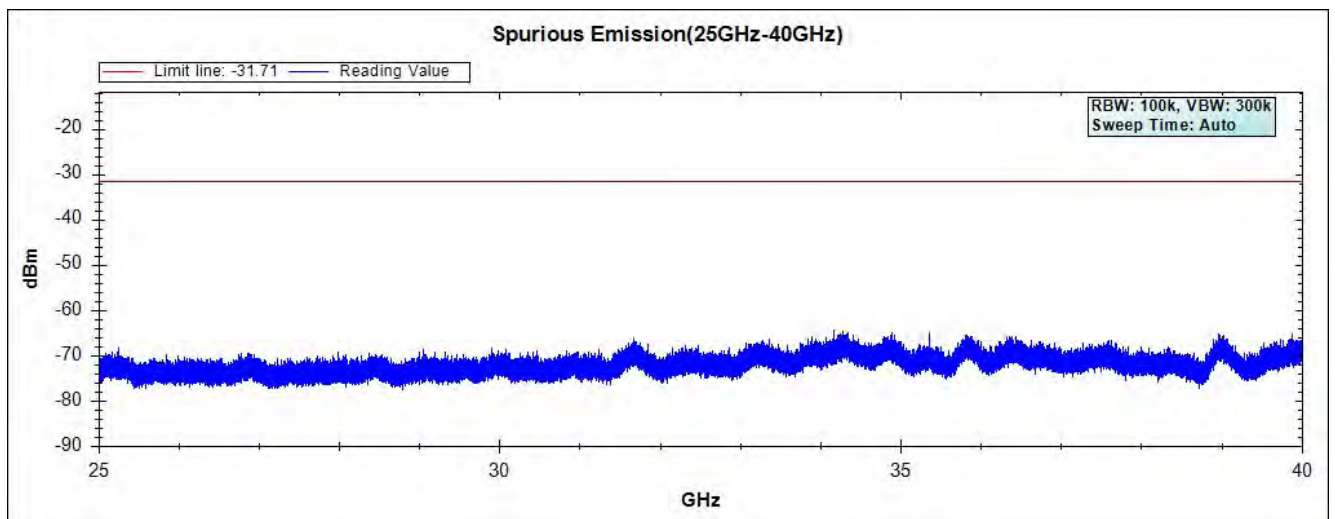
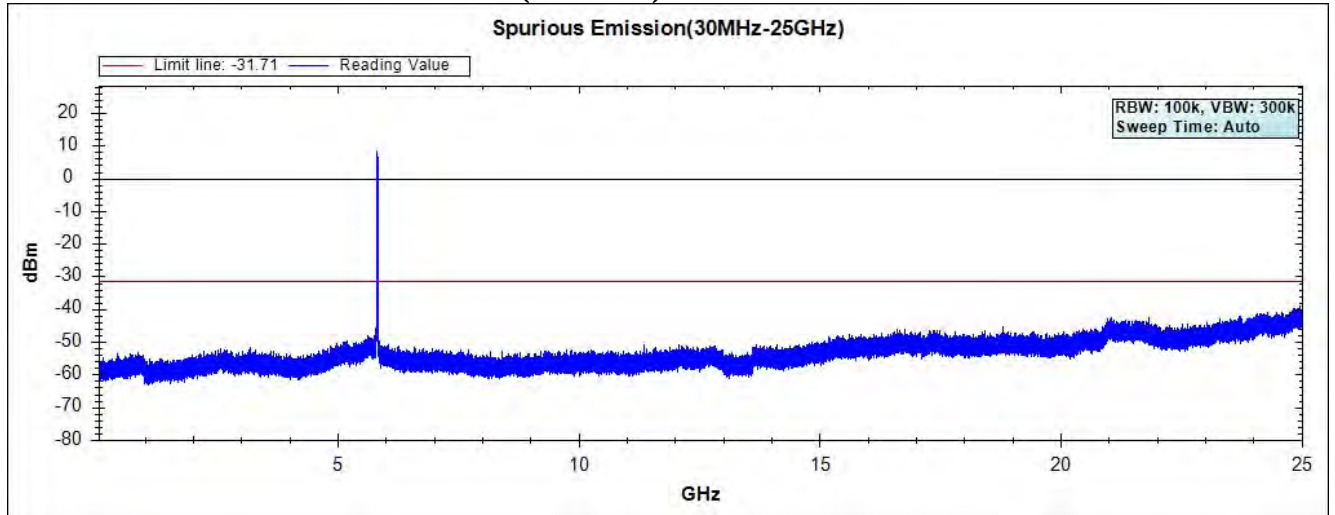


Product : 802.11 ac PCIe Module  
Test Item : RF Antenna Conducted Spurious  
Test Site : No.3 OATS  
Test Mode : Mode 7: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Grid DISH Antenna)



**Channel 151 (5755MHz) 30MHz -40GHz-Chain A**

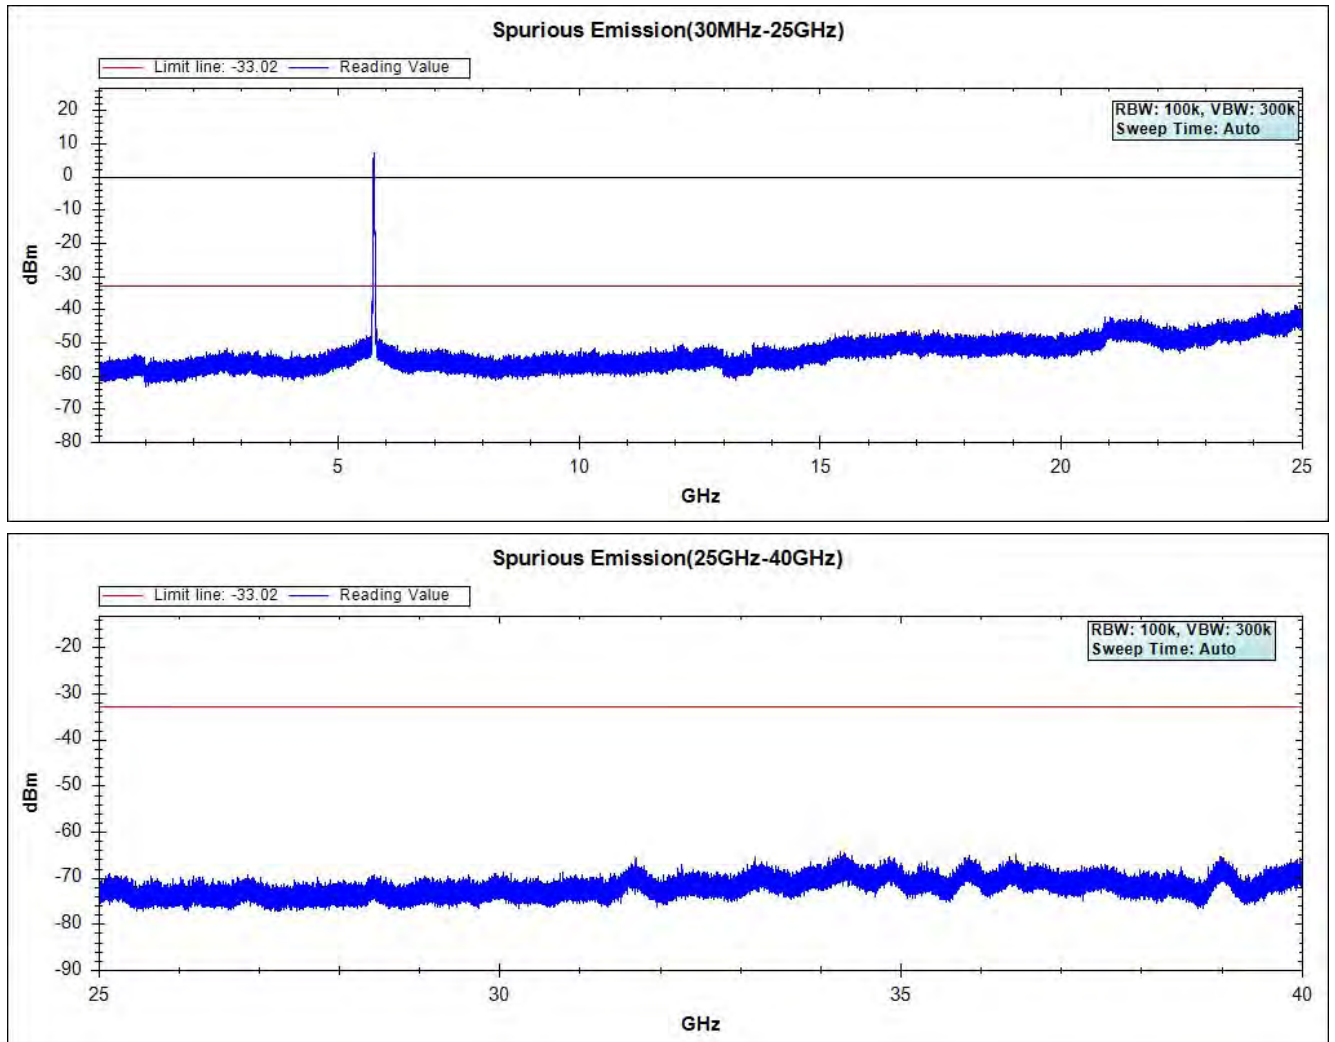



### Channel 159 (5795MHz) 30MHz -40GHz-Chain A

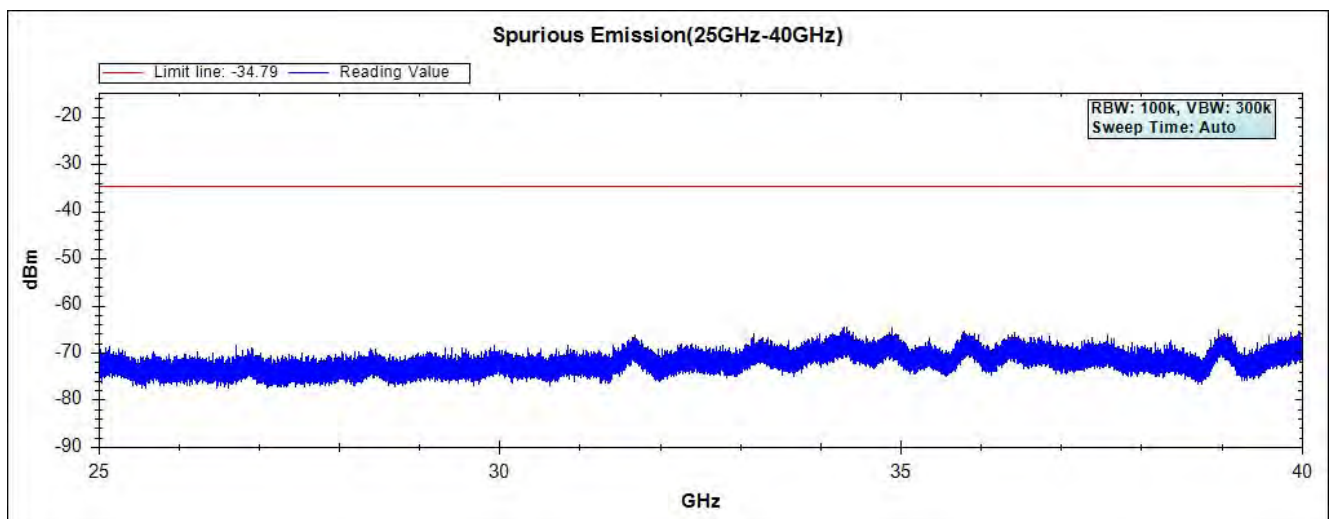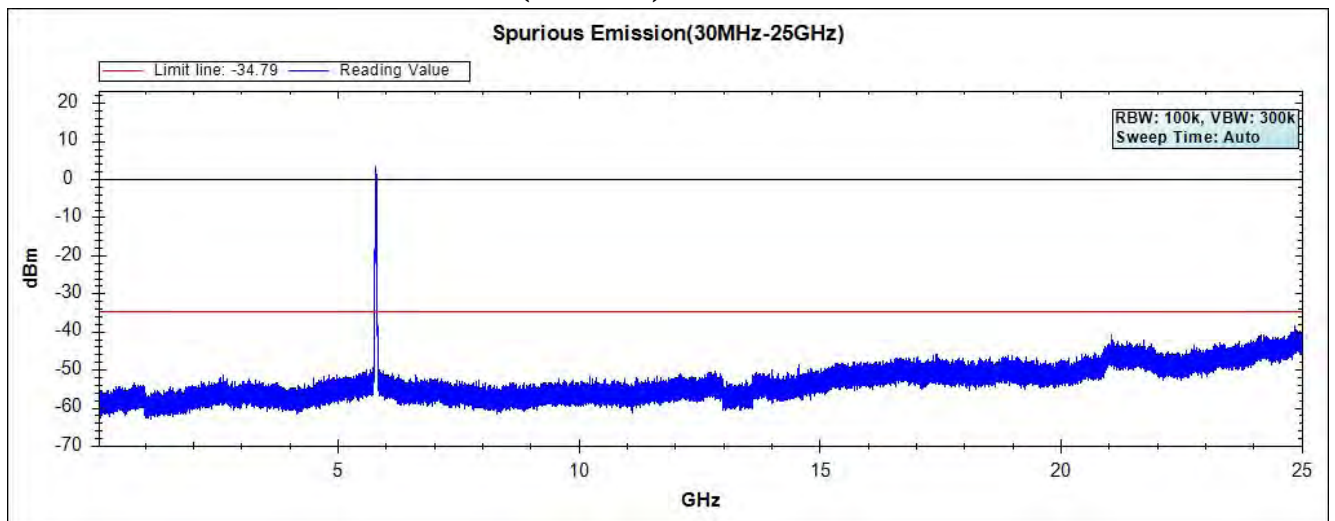

**Channel 151 (5755MHz) 30MHz -40GHz-Chain B**

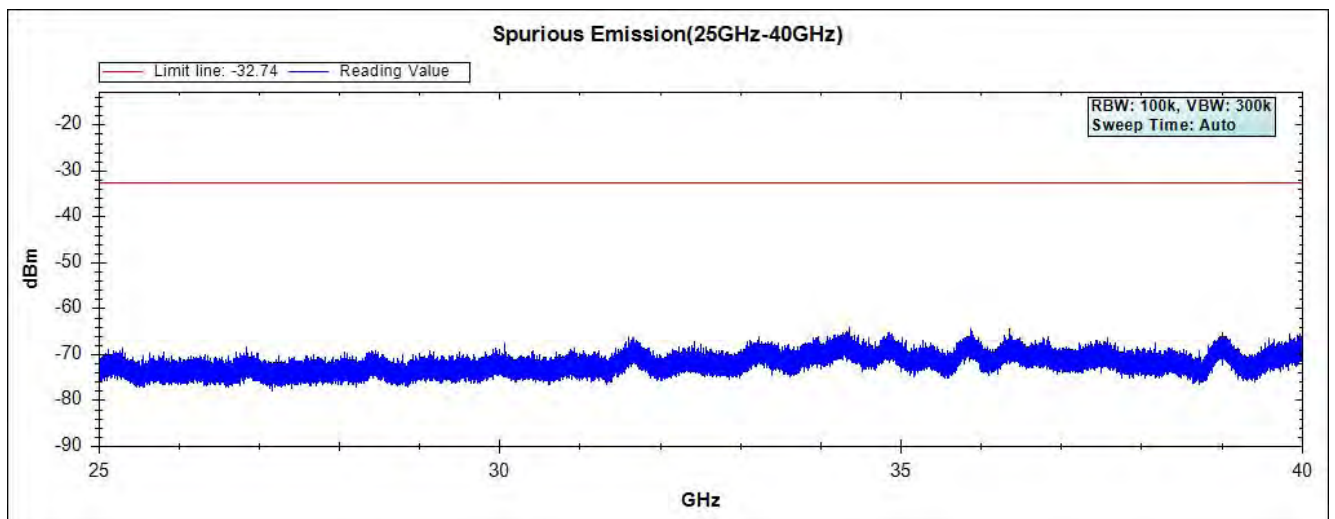
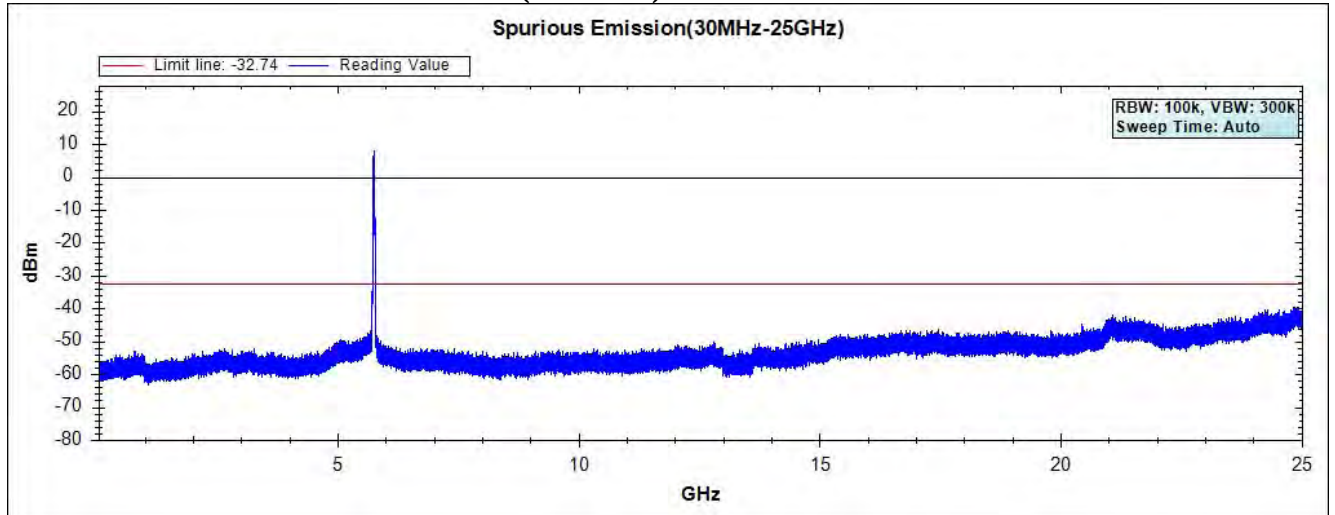


### Channel 159 (5795MHz) 30MHz -40GHz-Chain B

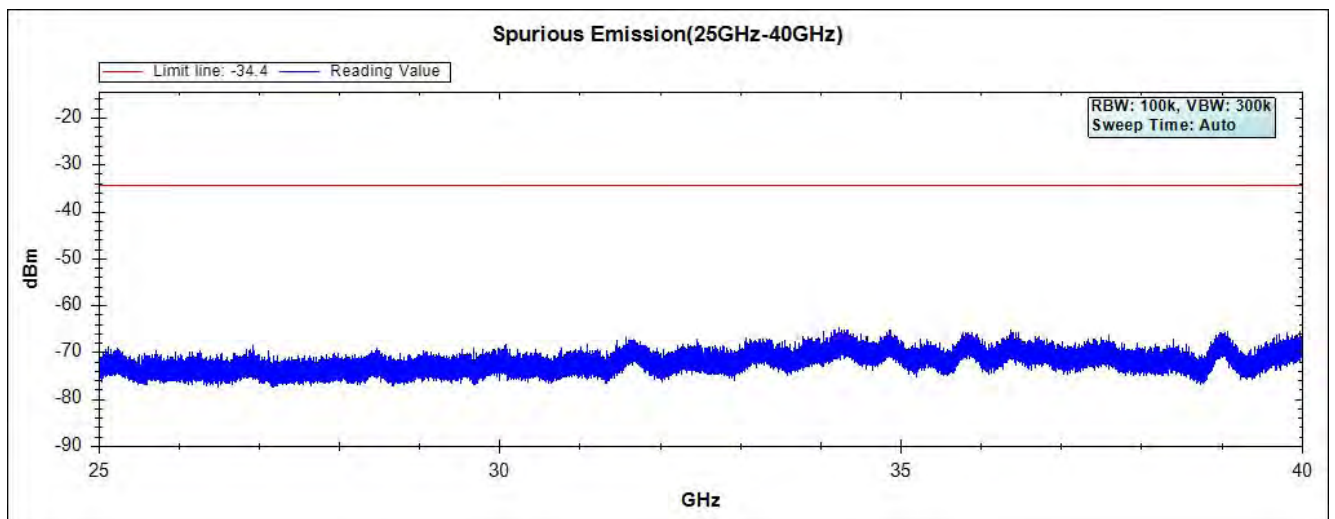
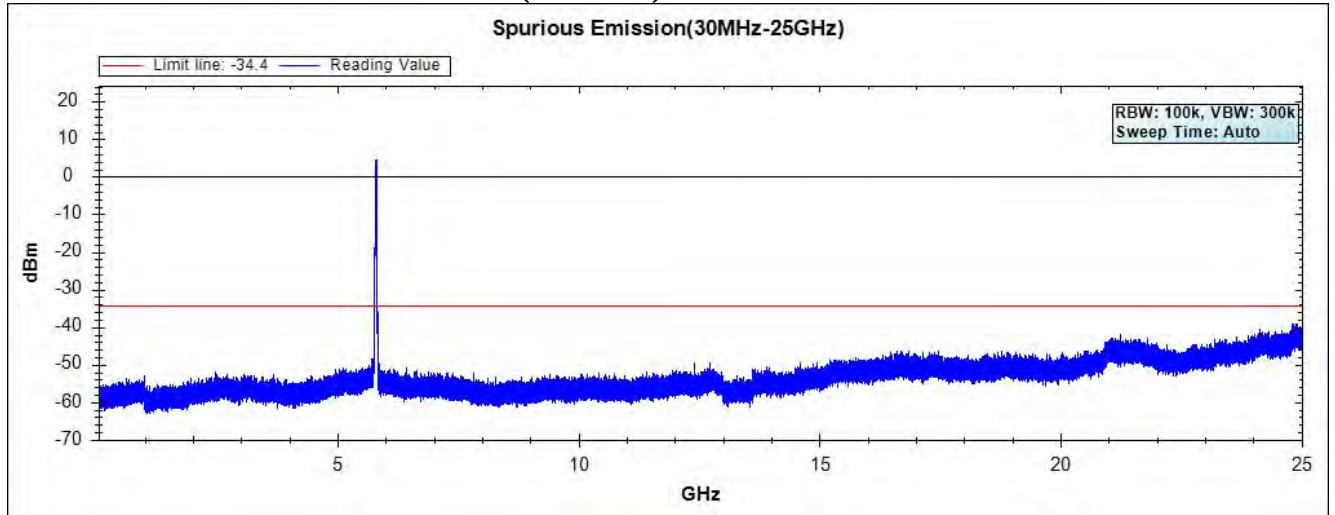


Product : 802.11 ac PCIe Module  
 Test Item : RF Antenna Conducted Spurious  
 Test Site : No.3 OATS  
 Test Mode : Mode 8: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Grid DISH Antenna)

**Channel 1 (5780MHz) 30MHz -40GHz- Chaia A**

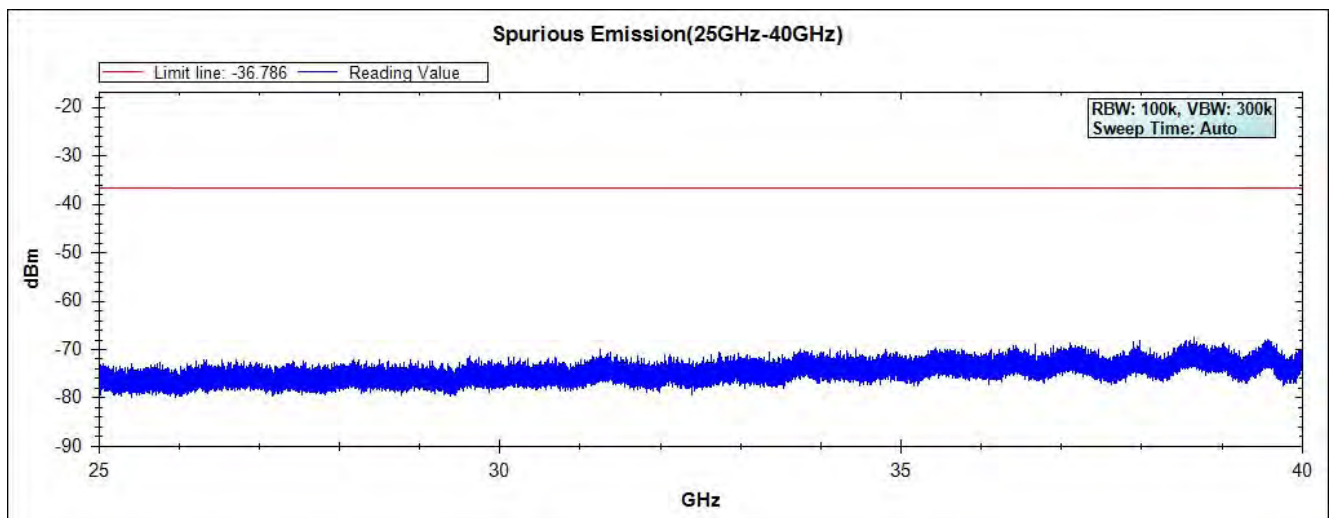
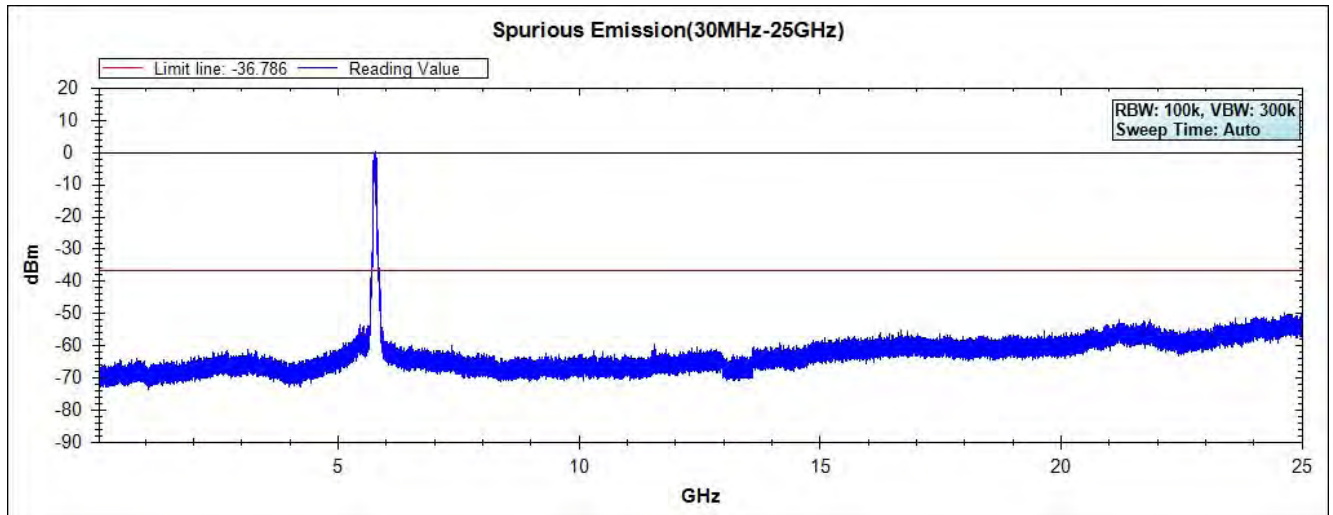


Channel 1 (5780MHz) 30MHz -40GHz- Chaia B

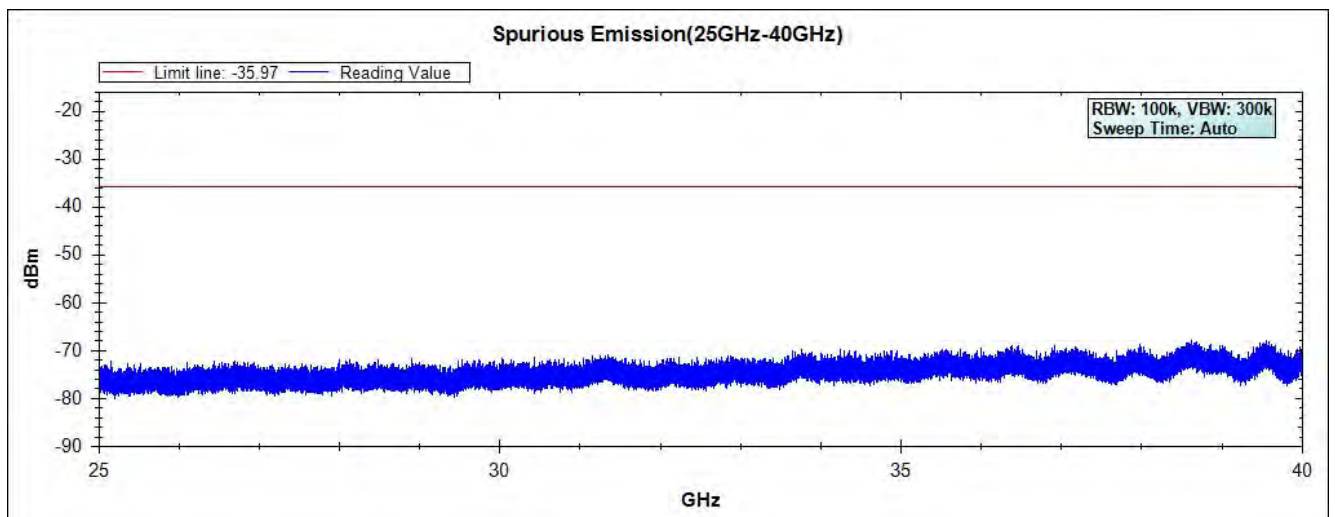
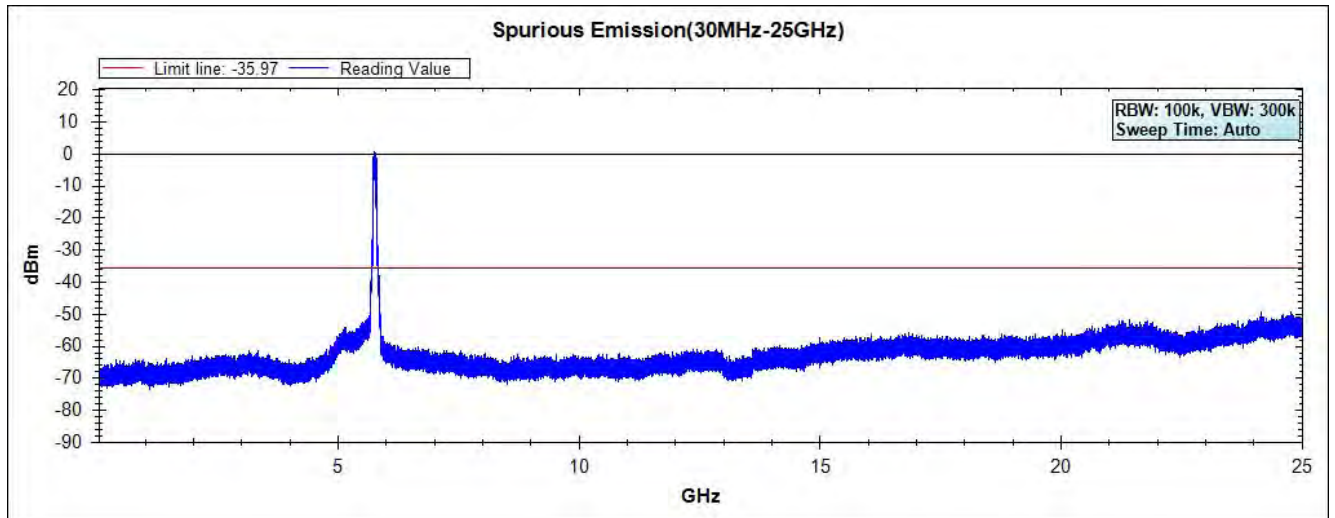


Product : 802.11 ac PCIe Module  
Test Item : RF Antenna Conducted Spurious  
Test Site : No.3 OATS  
Test Mode : Mode 9: Transmit - 802.11a\_6Mbps(Omni Antenna)



**Channel 149 (5745MHz) 30MHz -40GHz-Chain A**

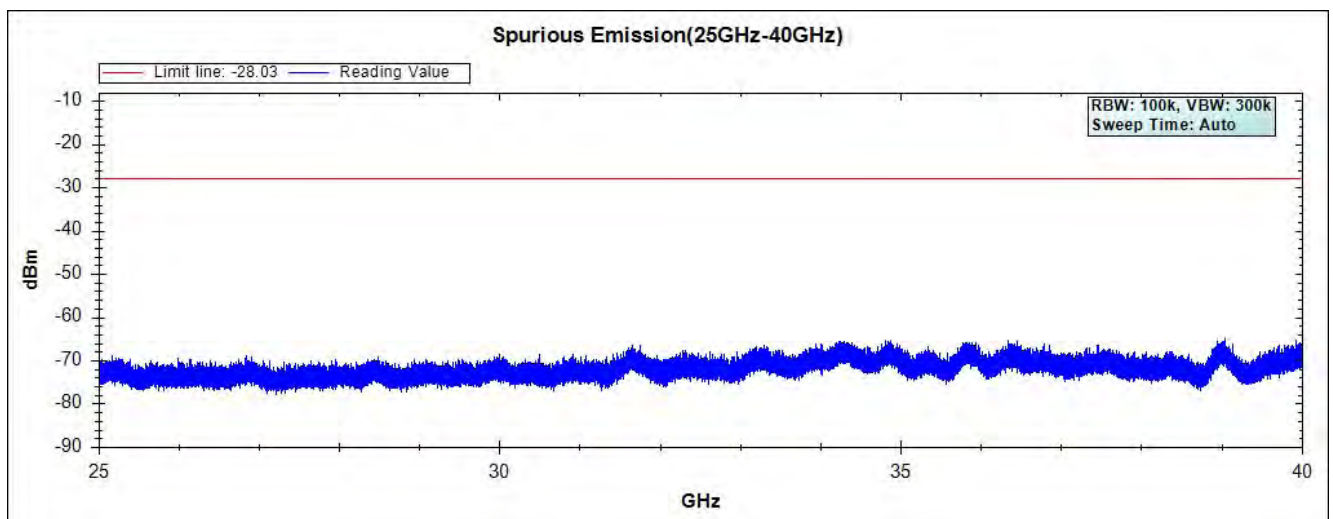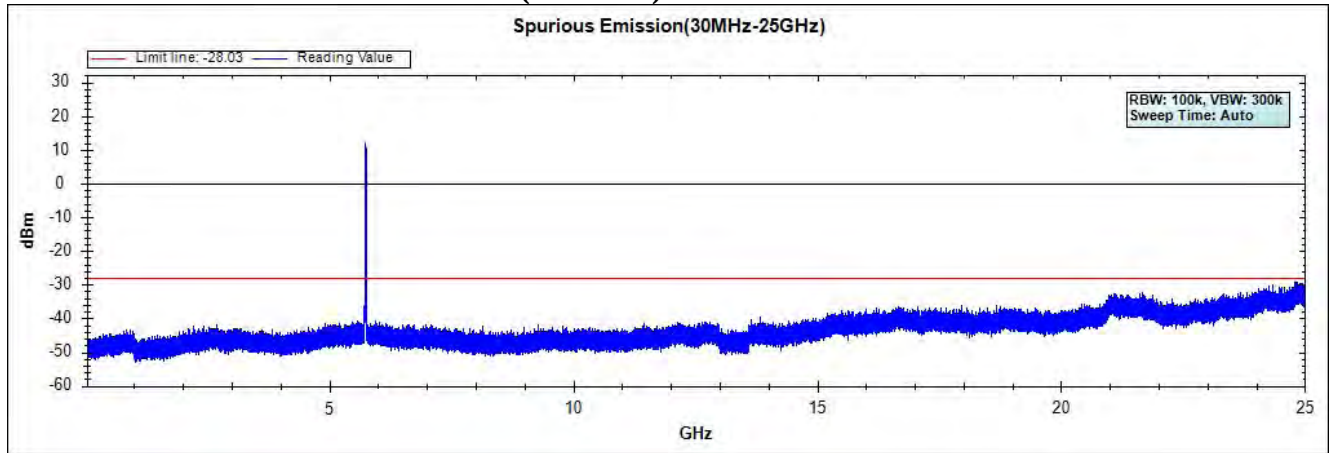



**Channel 157 (5785MHz) 30MHz -40GHz-Chain A**

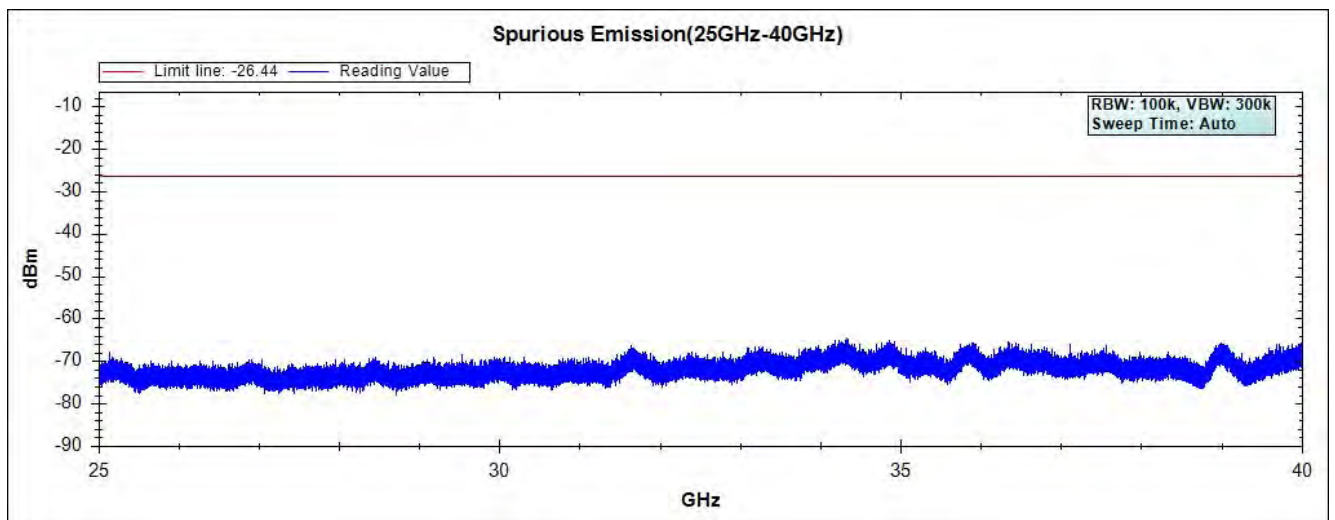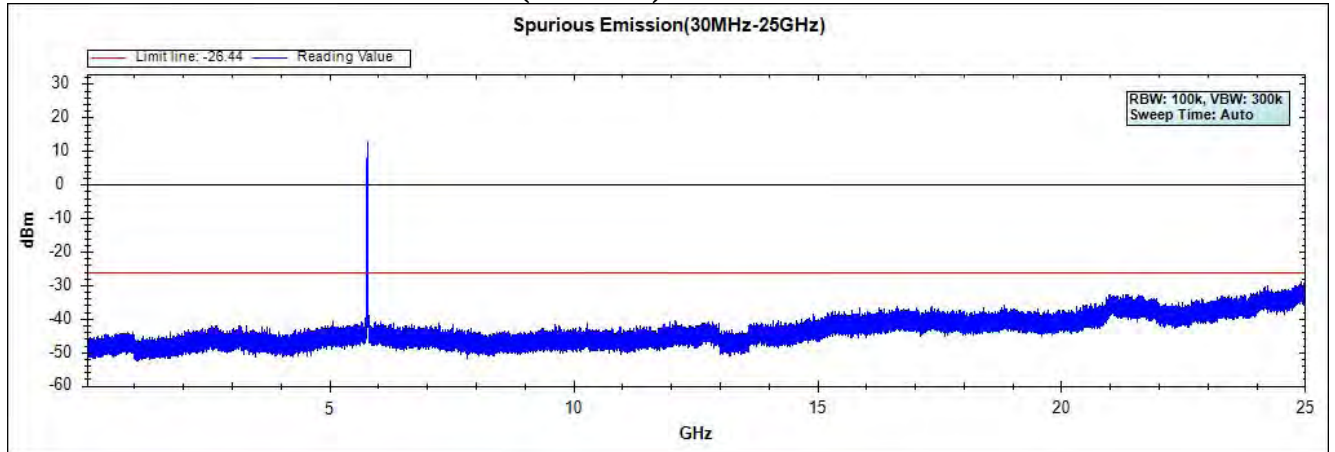



**Channel 165 (5825MHz) 30MHz -40GHz-Chain A**

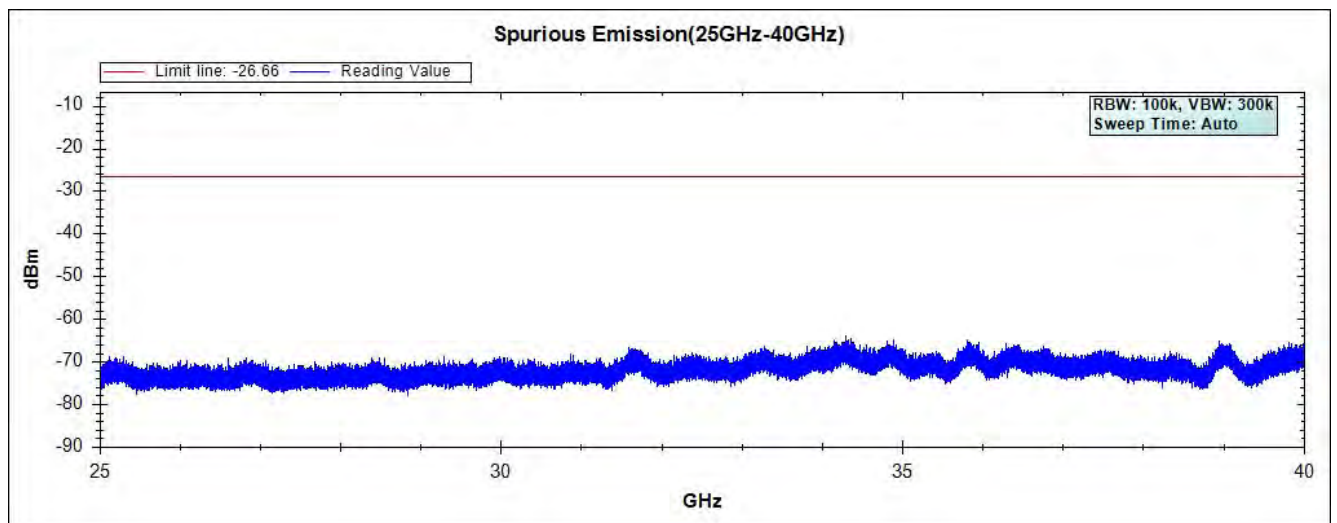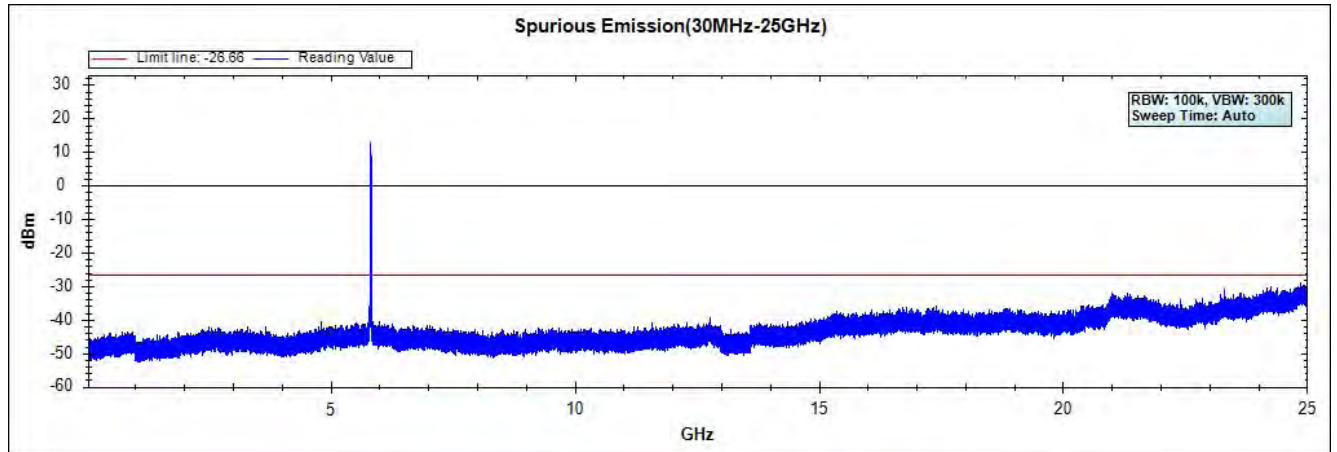



**Channel 149 (5745MHz) 30MHz -40GHz-Chain B**

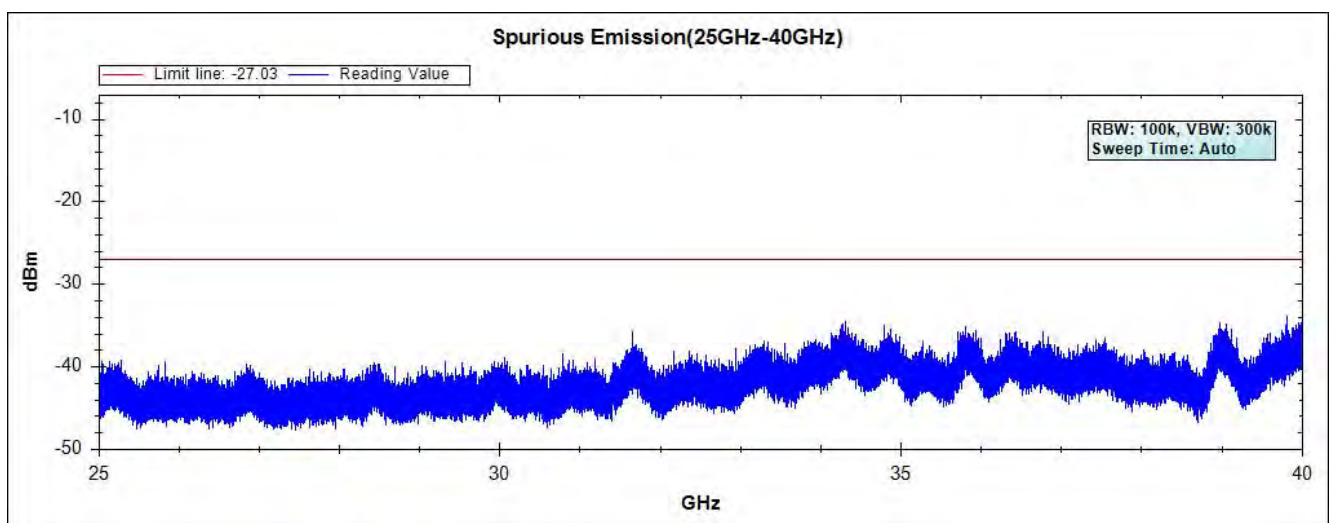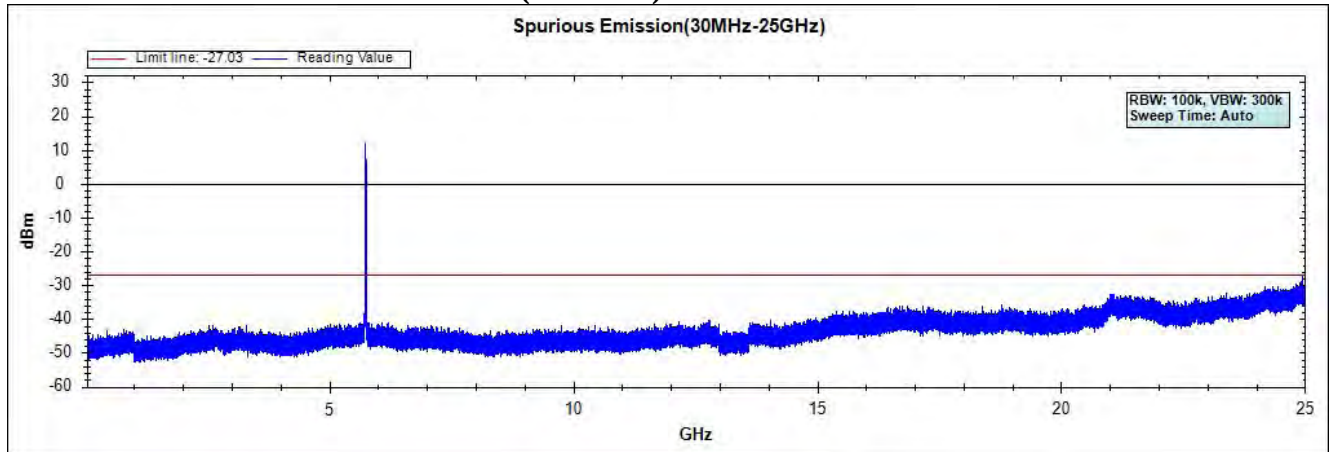

### Channel 157 (5785MHz) 30MHz -40GHz-Chain B

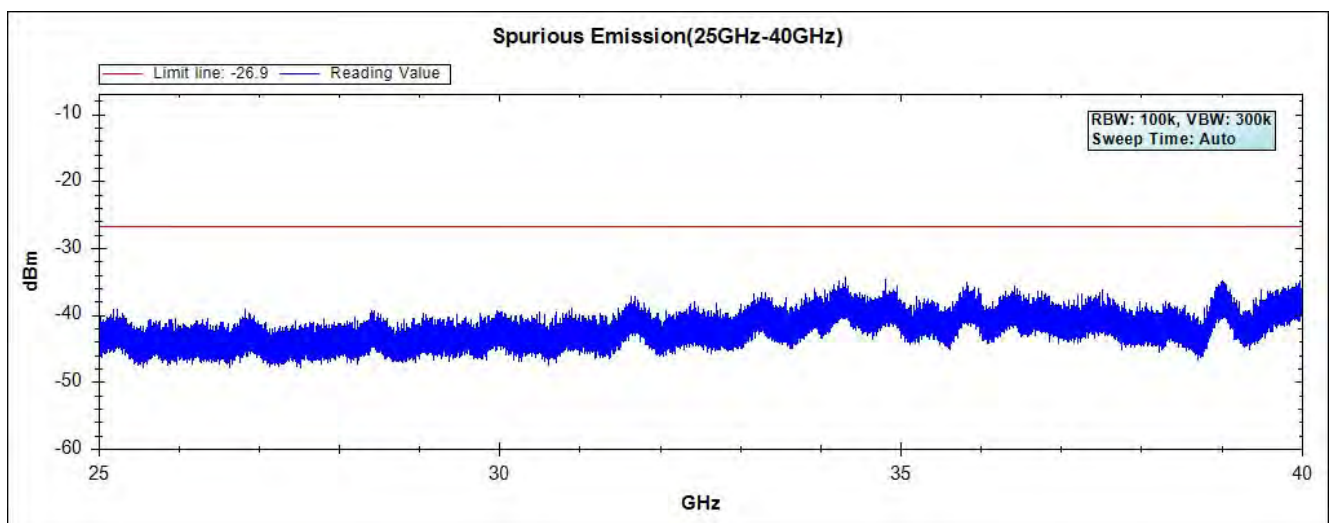
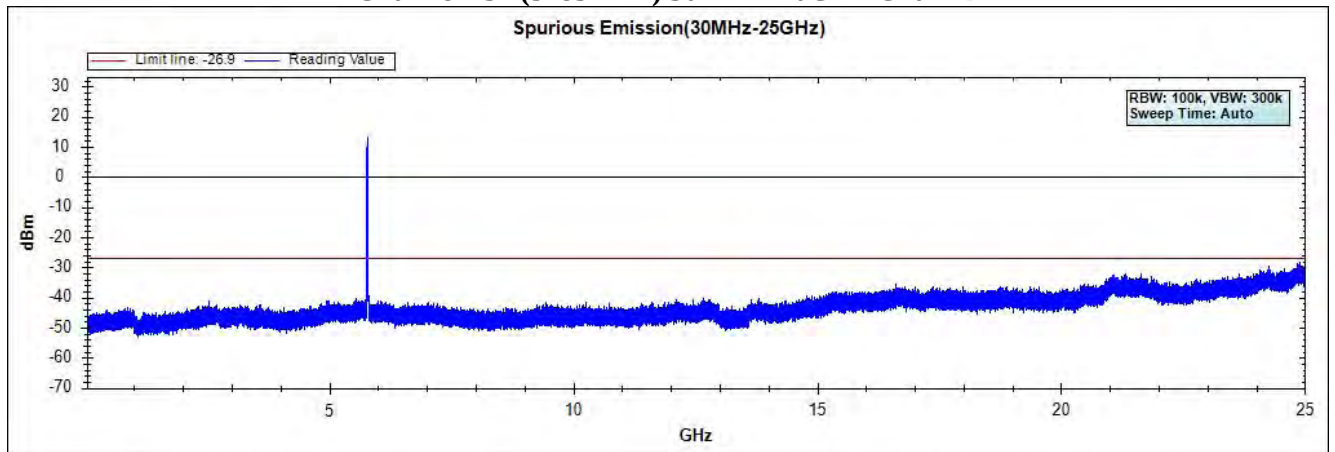


Channel 165 (5825MHz) 30MHz -40GHz-Chain B

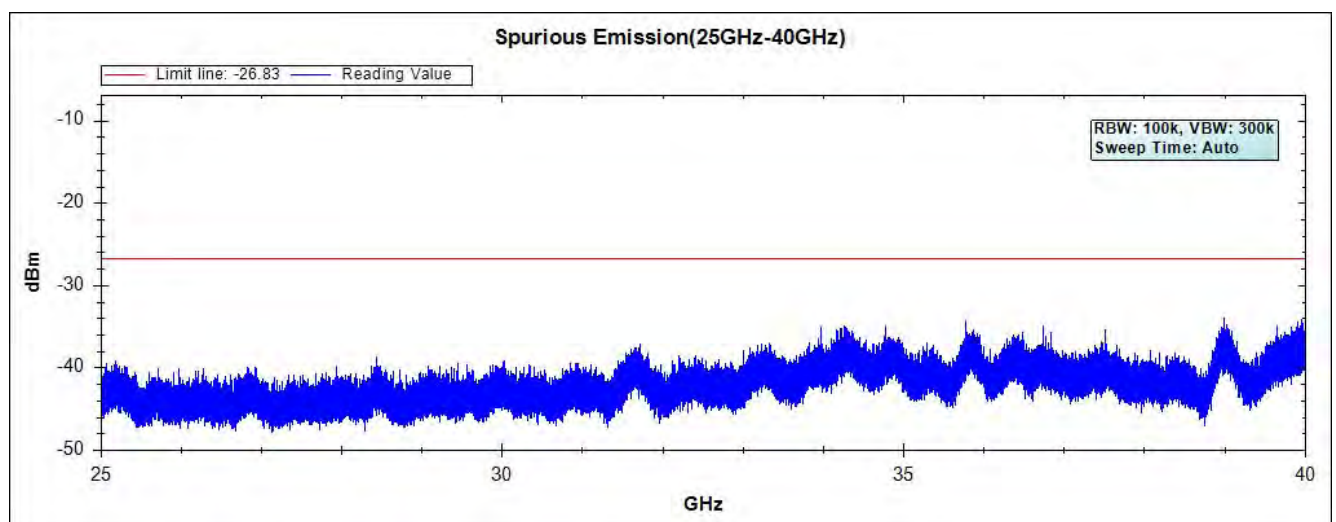
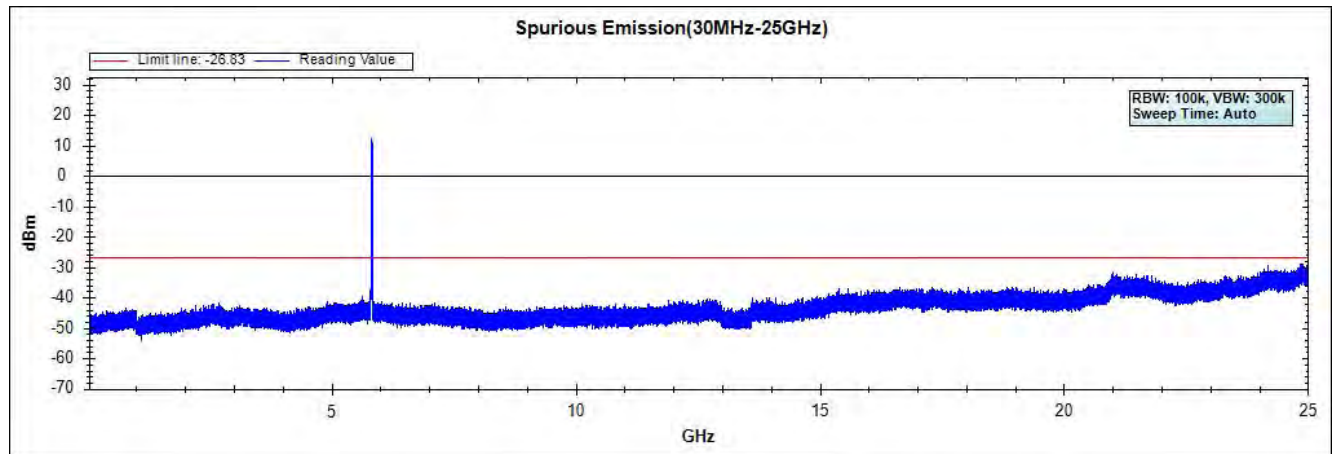


Product : 802.11 ac PCIe Module  
Test Item : RF Antenna Conducted Spurious  
Test Site : No.3 OATS  
Test Mode : Mode 10: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Omni Antenna)



### Channel 49 (5745MHz) 30MHz -40GHz-Chain A

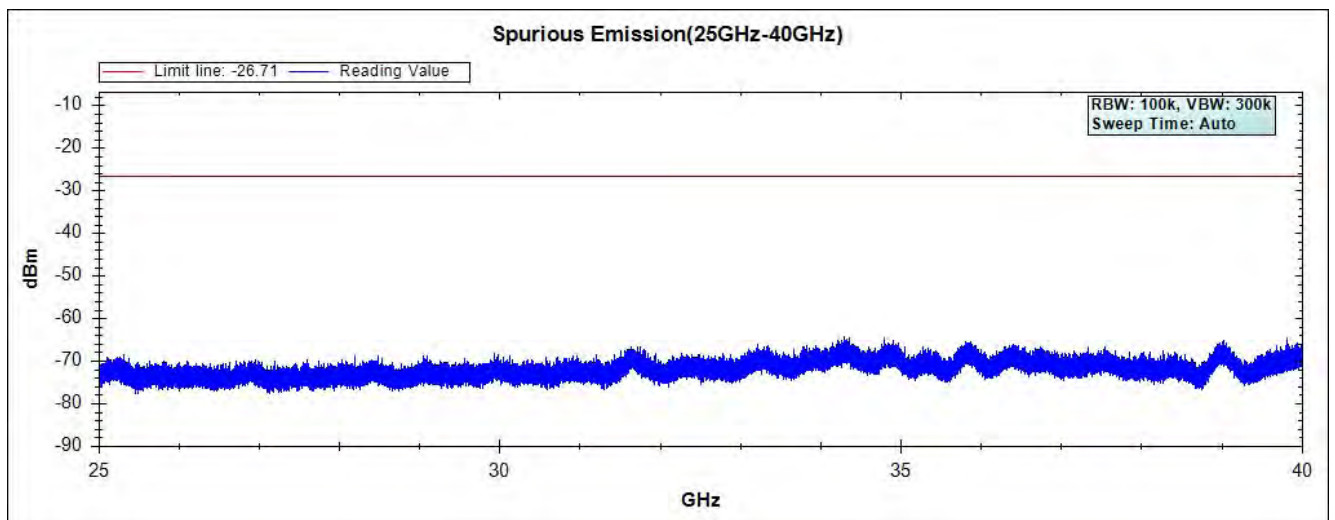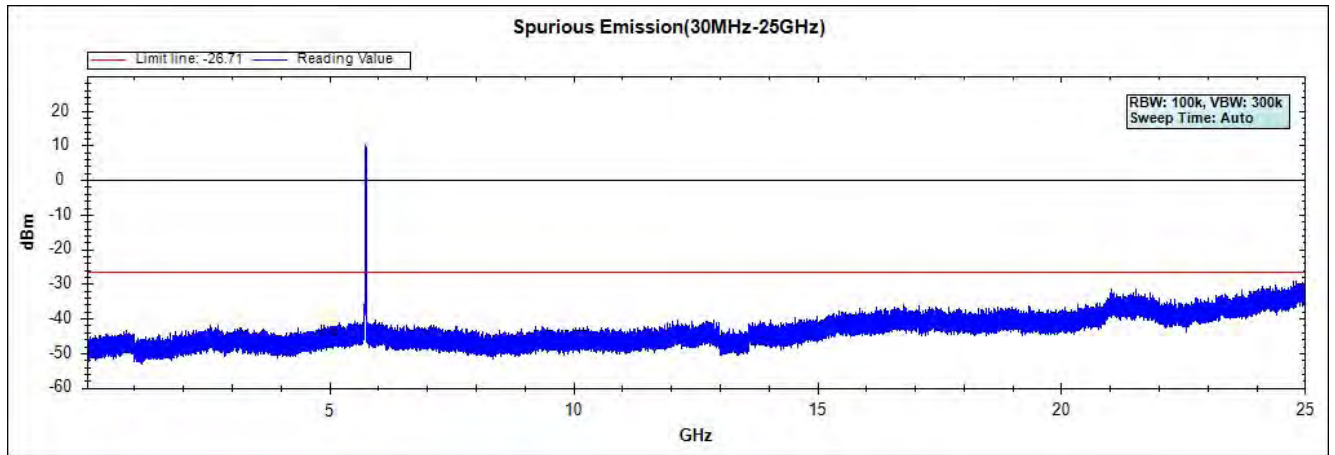



### Channel 157 (5785MHz) 30MHz -40GHz-Chain A

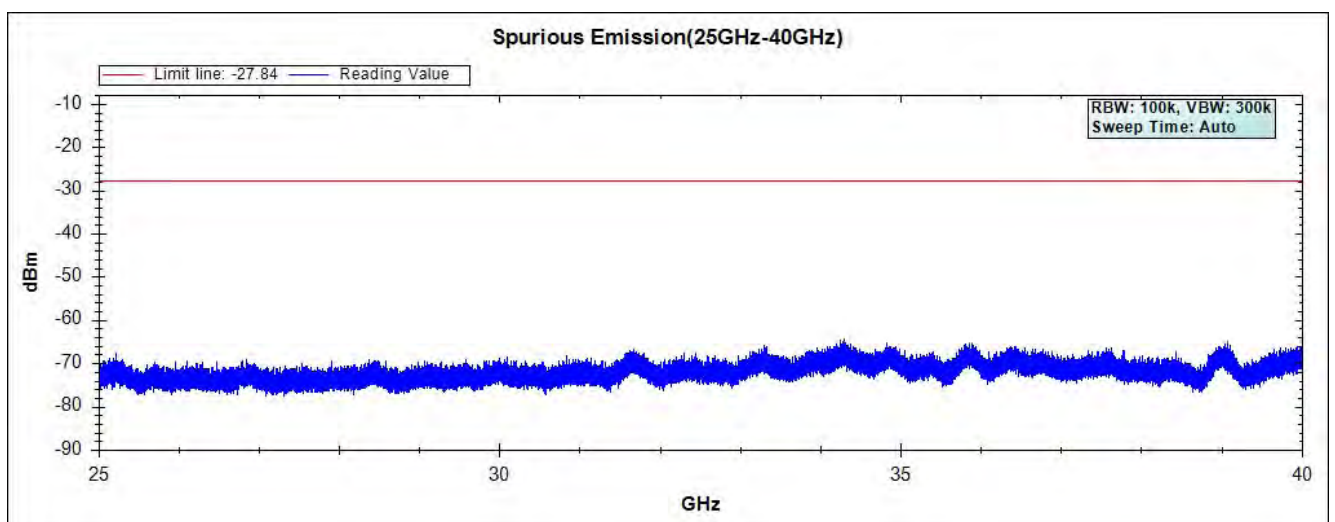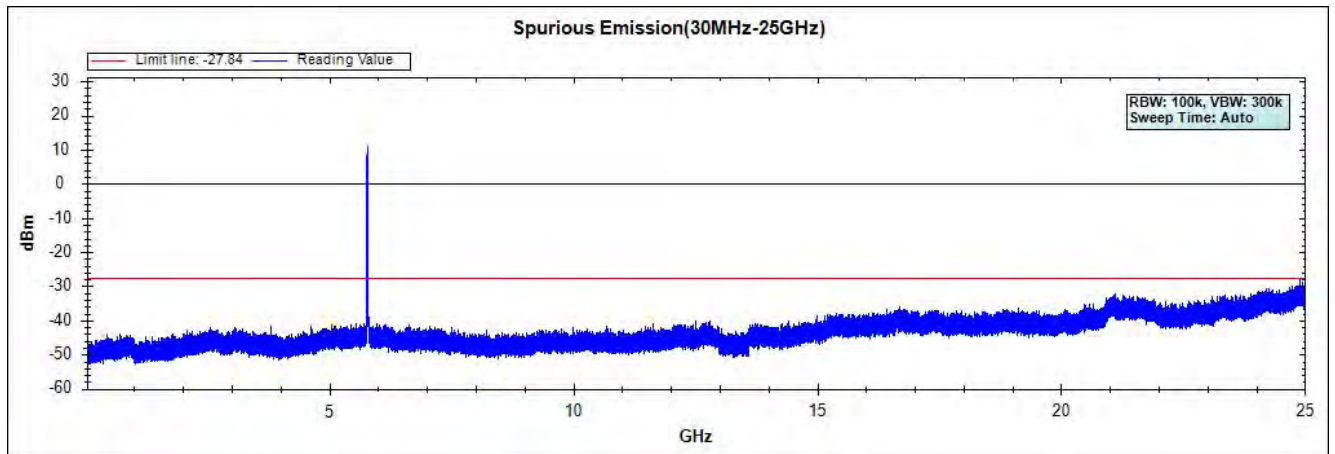



### Channel 165 (5825MHz) 30MHz -40GHz-Chain A

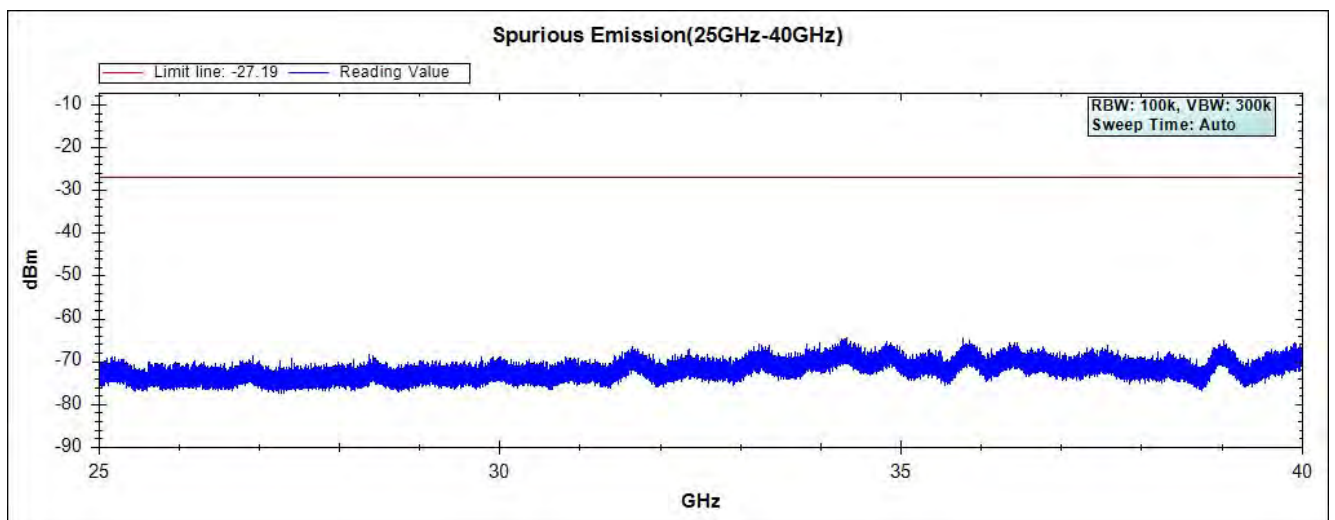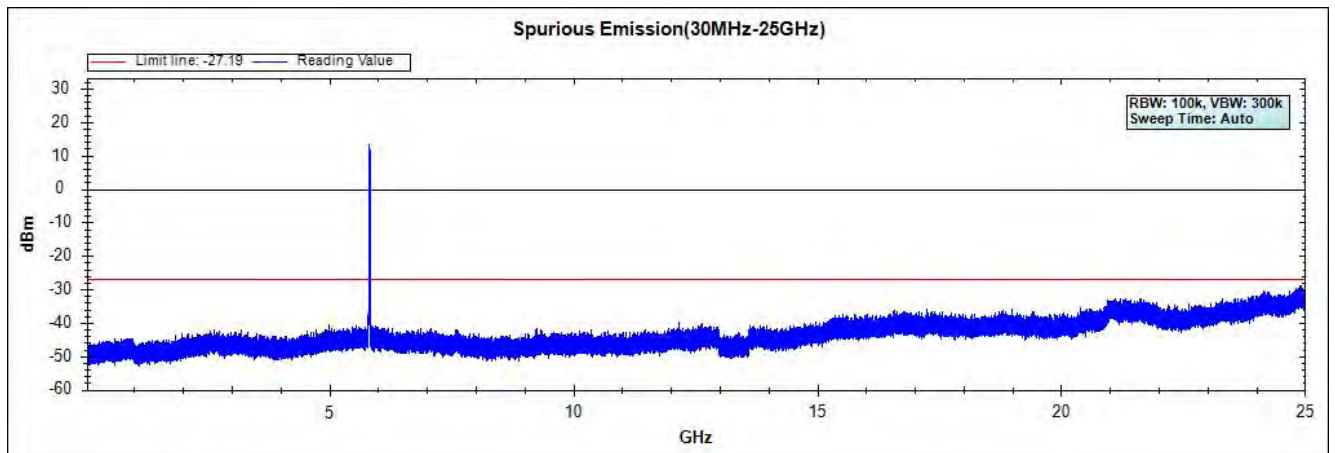



**Channel 49 (5745MHz) 30MHz -40GHz-Chain B**

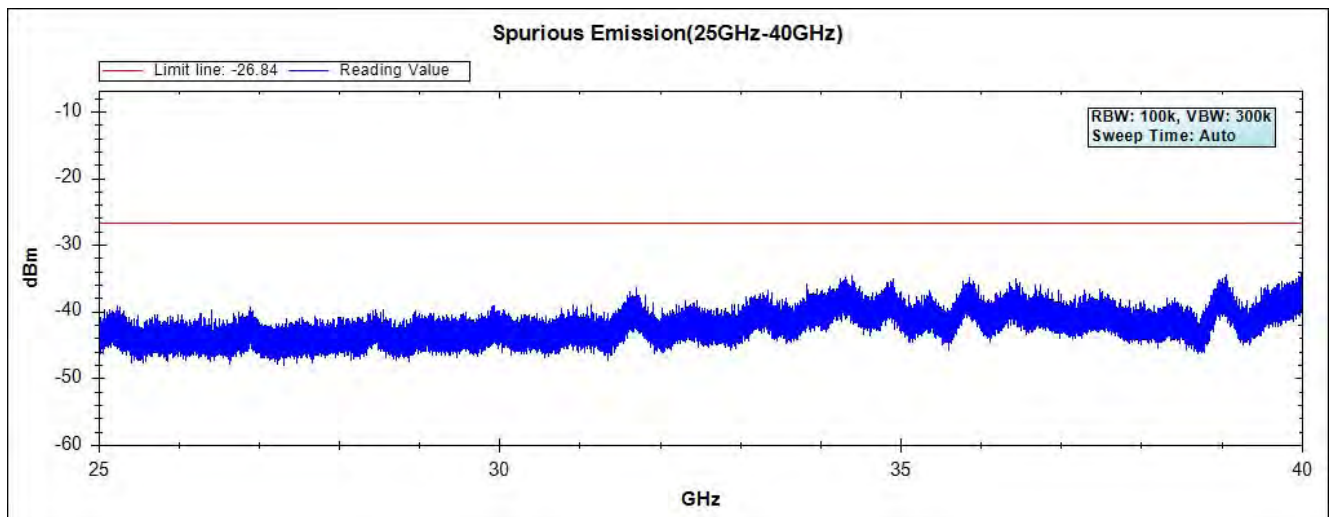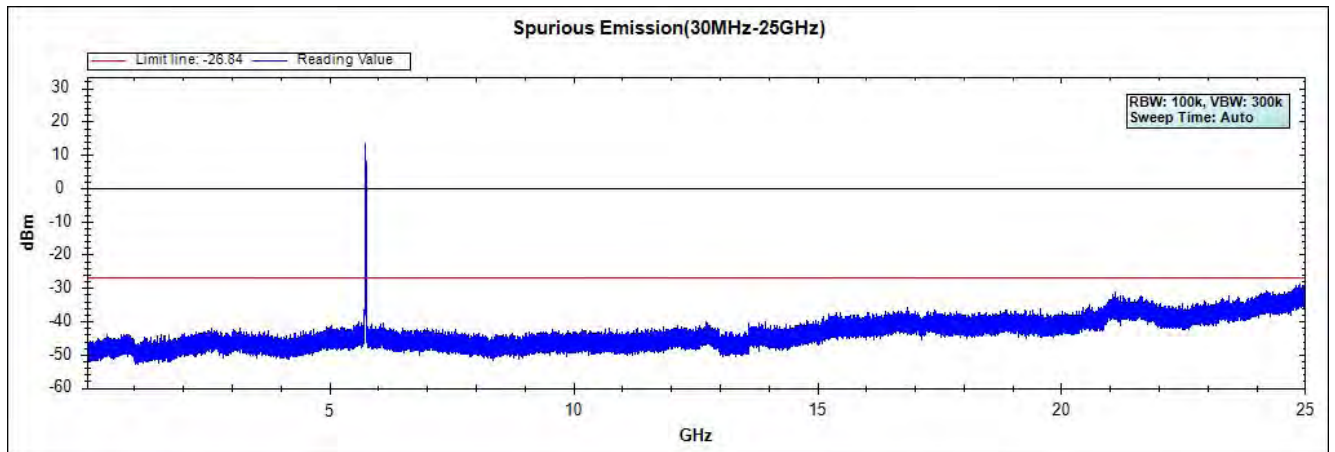

**Channel 157 (5785MHz) 30MHz -40GHz-Chain B**

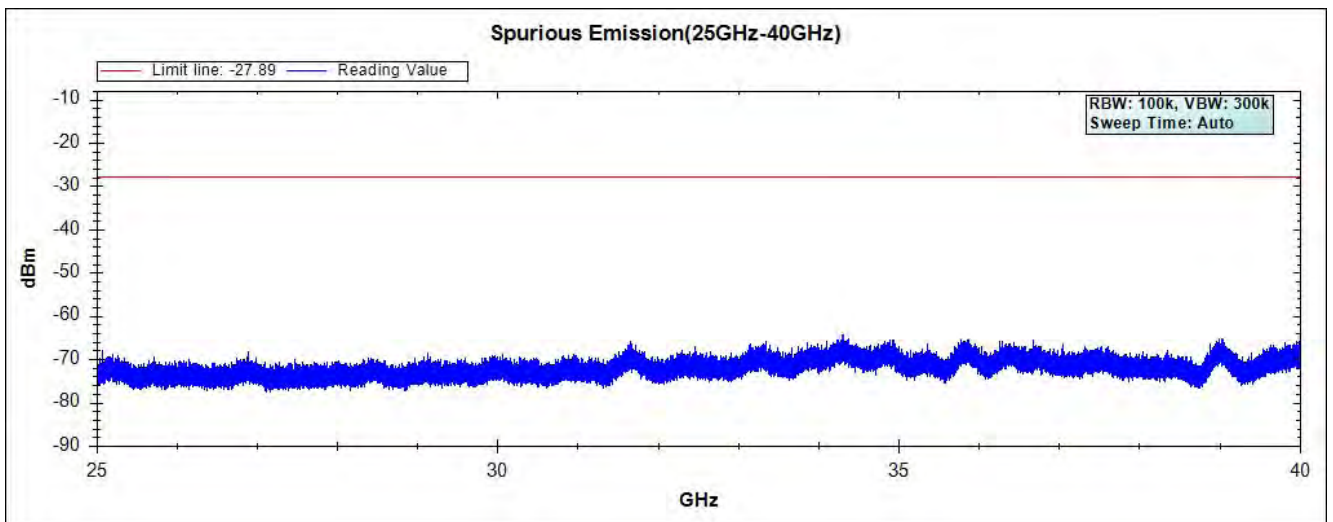
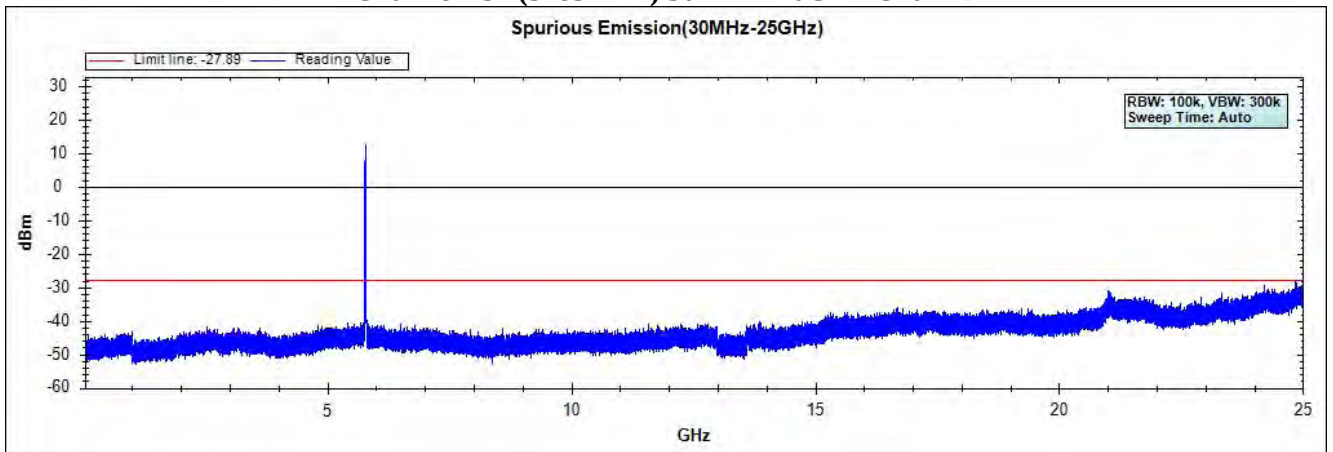


**Channel 165 (5825MHz) 30MHz -40GHz-Chain B**

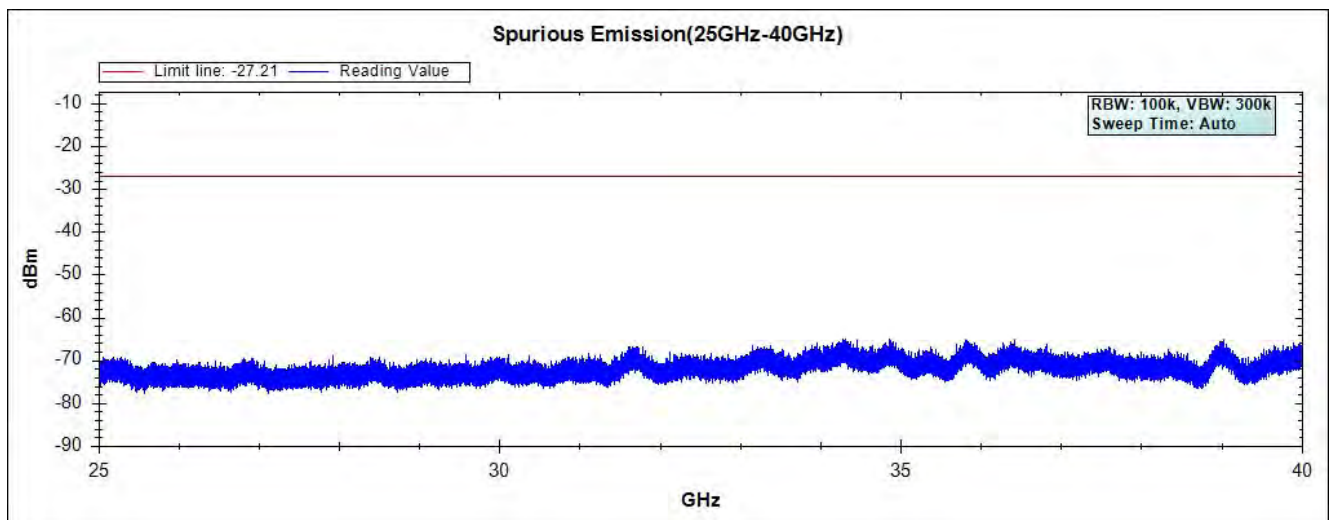
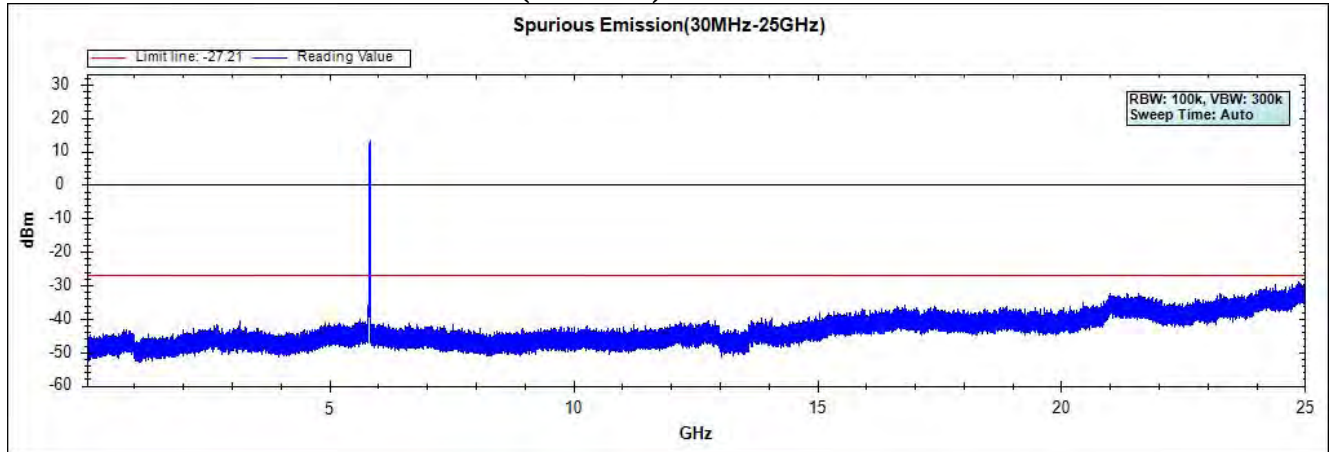


Product : 802.11 ac PCIe Module  
Test Item : RF Antenna Conducted Spurious  
Test Site : No.3 OATS  
Test Mode : Mode 11: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Omni Antenna)



**Channel 151 (5755MHz) 30MHz -40GHz-Chain A**

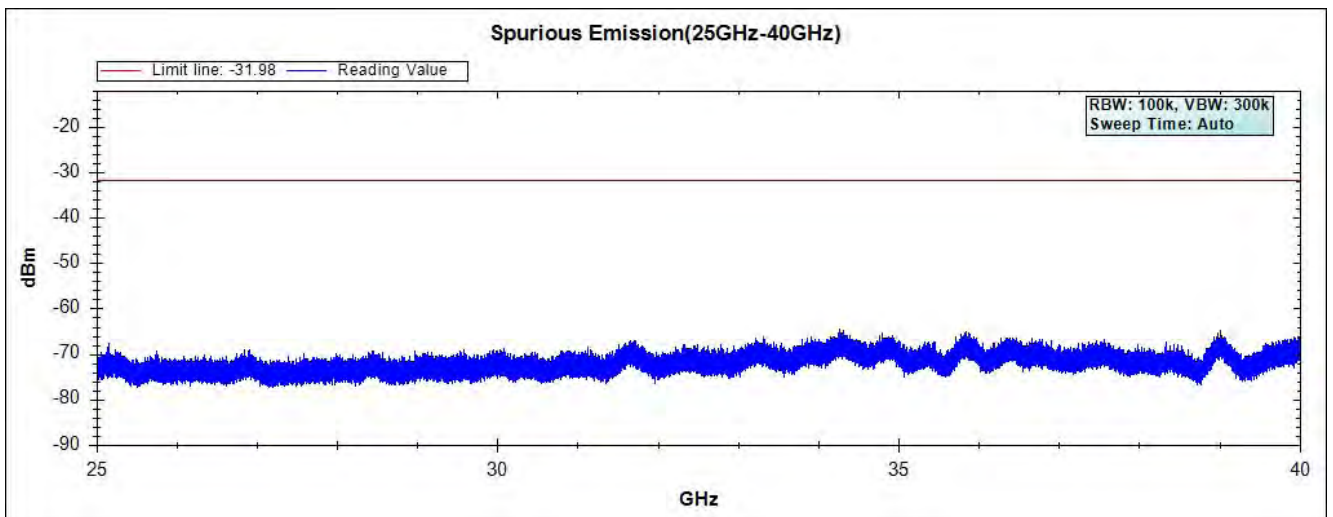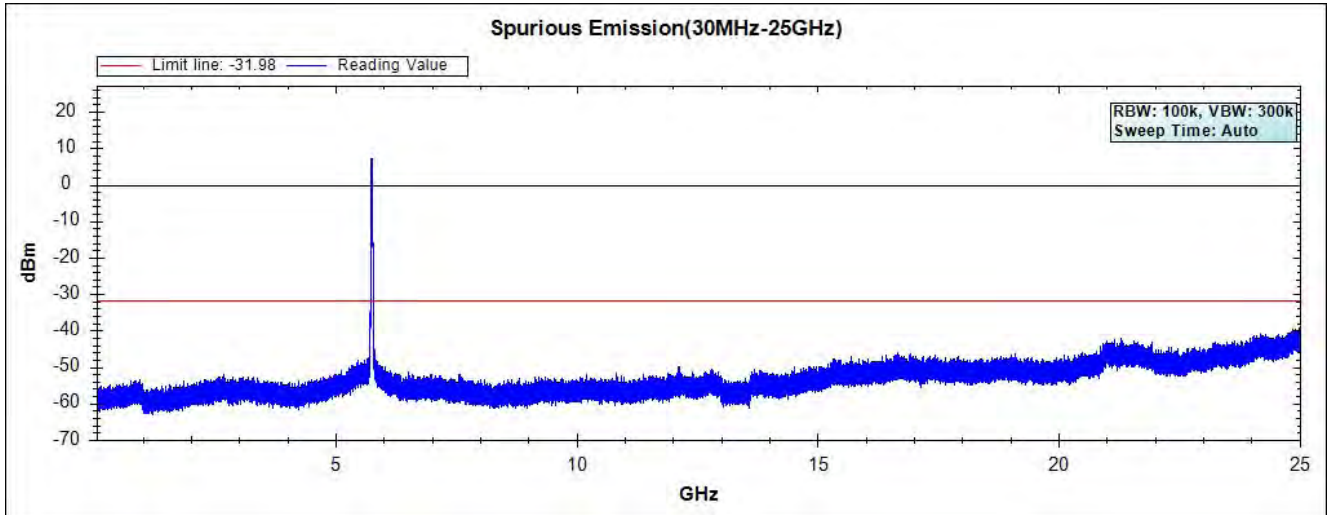



**Channel 159 (5795MHz) 30MHz -40GHz-Chain A**

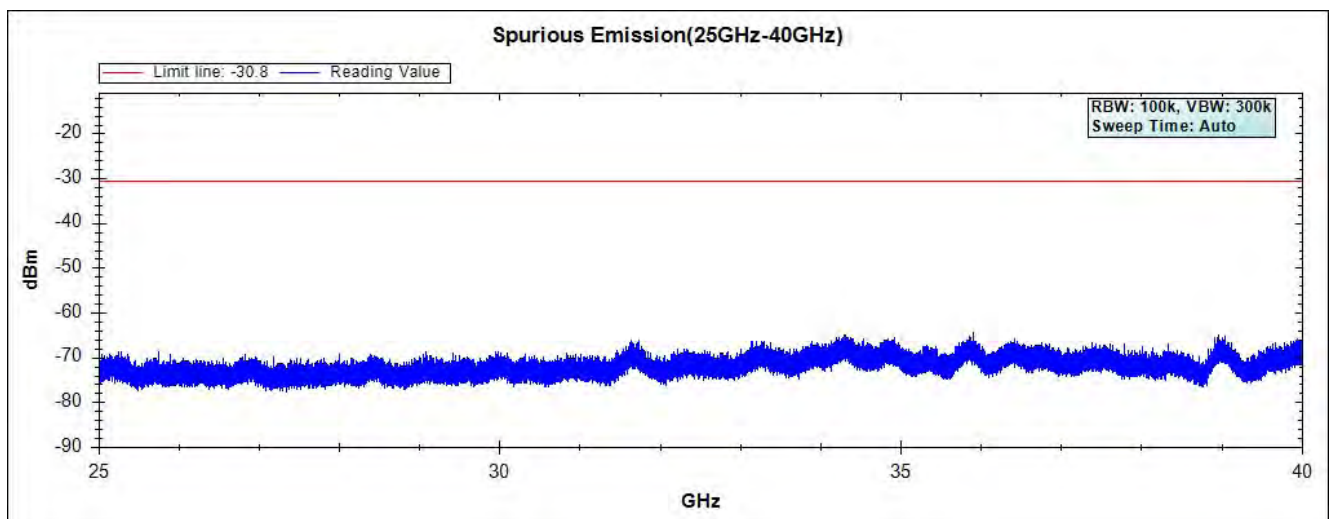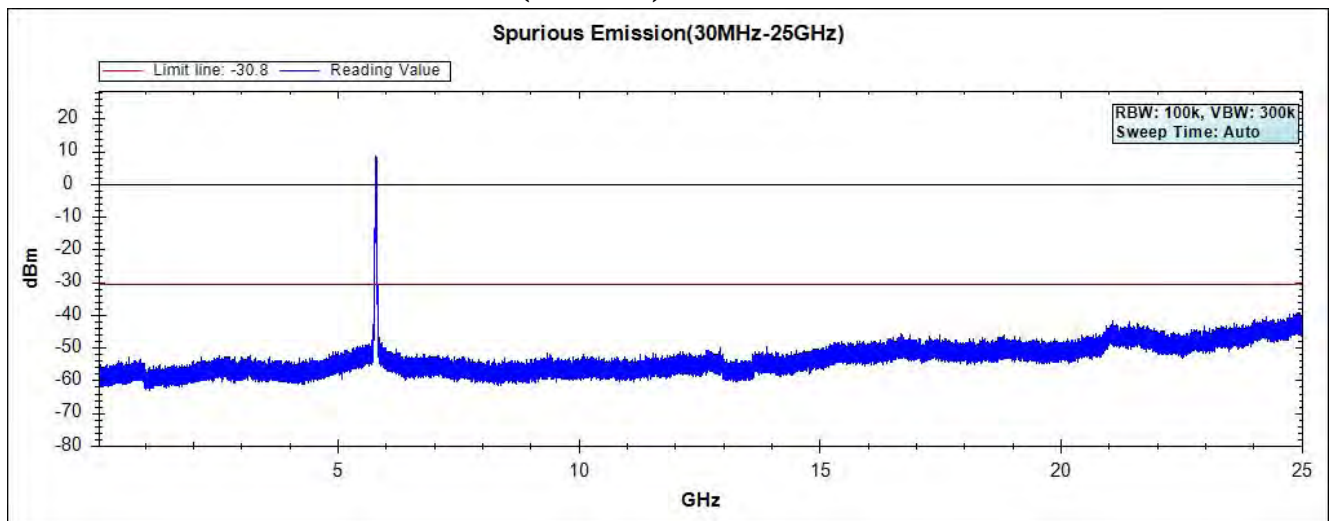

### Channel 151 (5755MHz) 30MHz -40GHz-Chain B

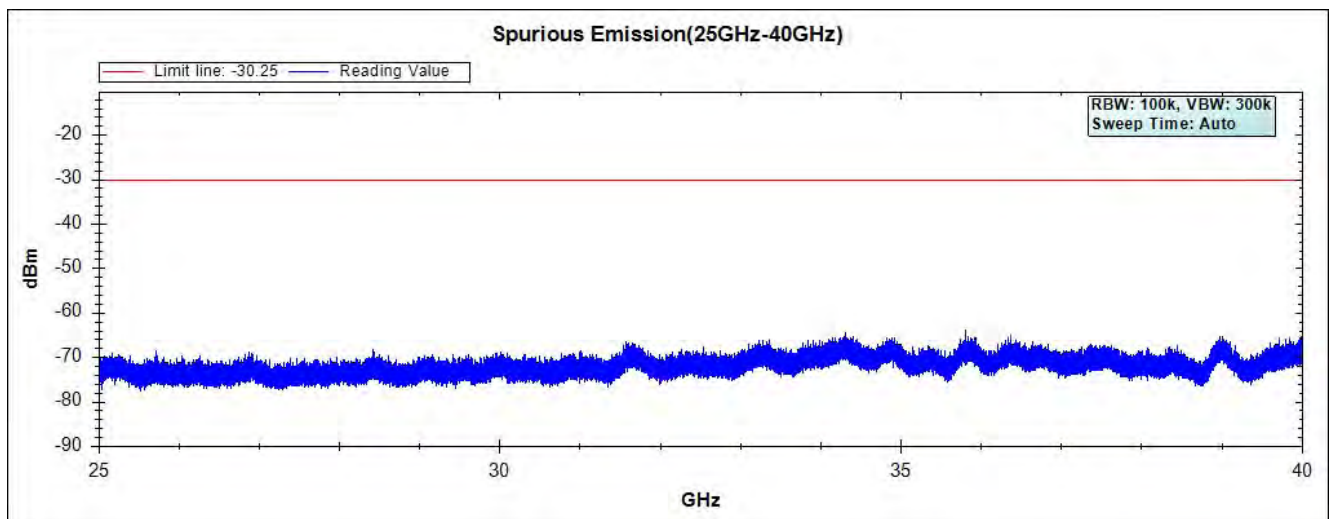
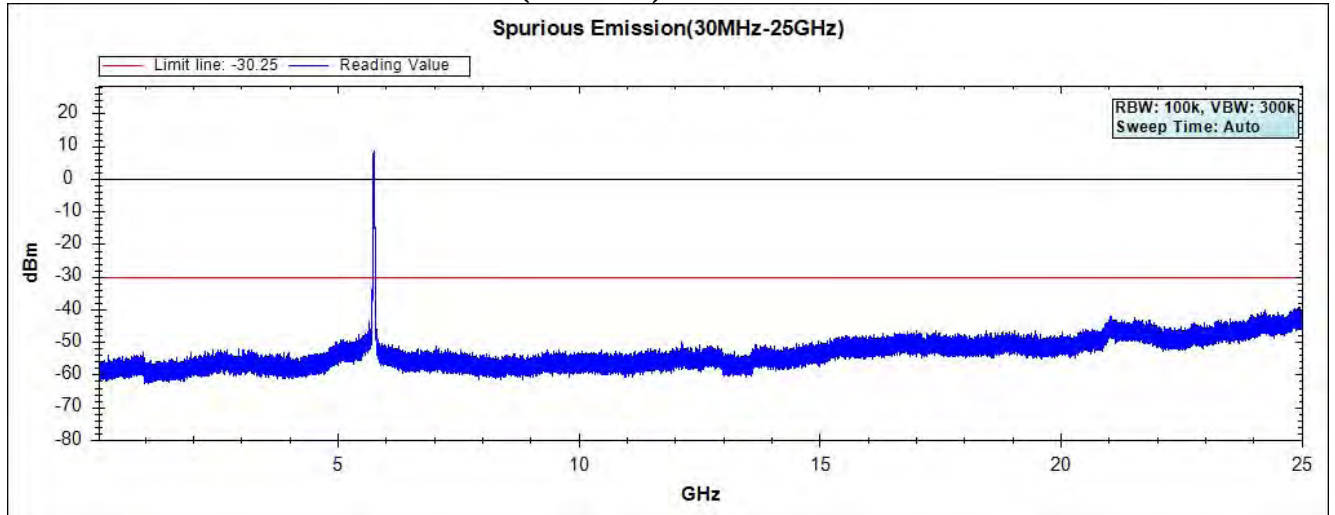


### Channel 159 (5795MHz) 30MHz -40GHz-Chain B

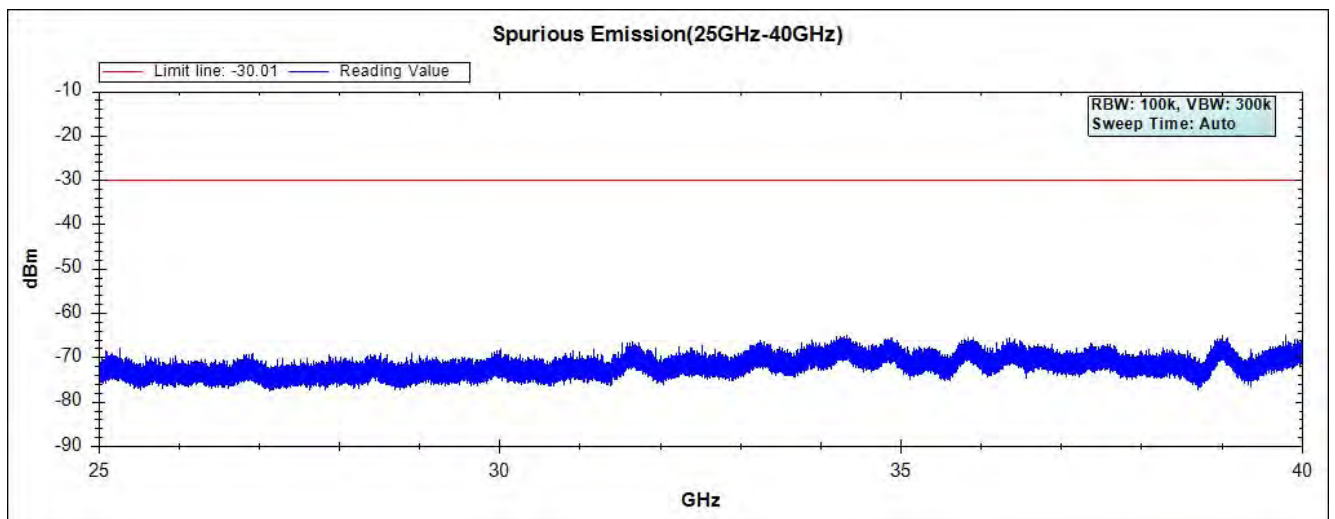
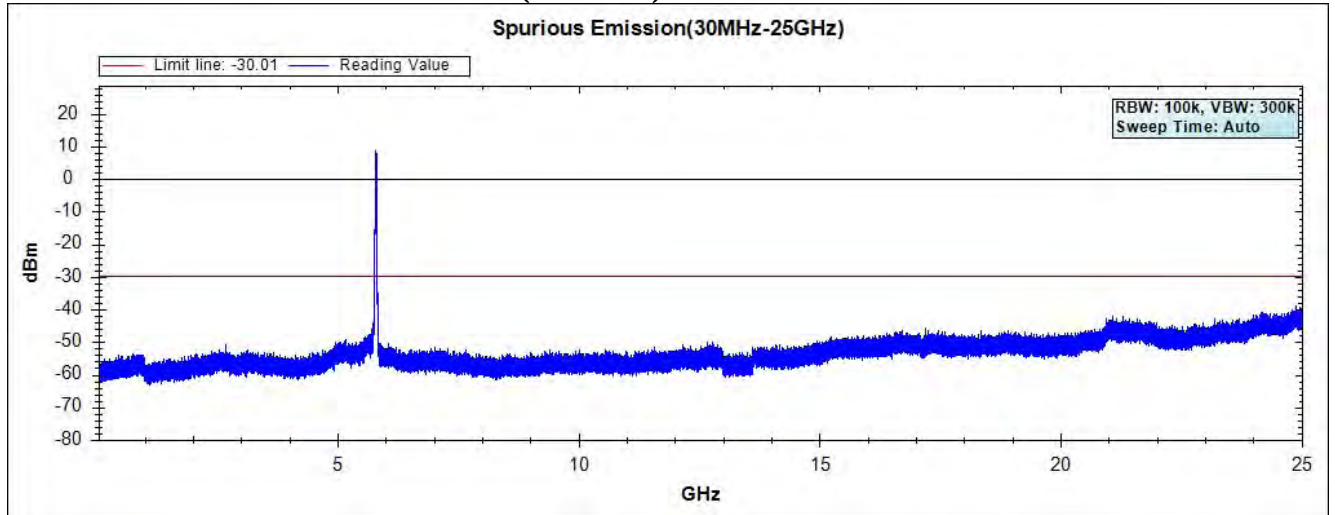


Product : 802.11 ac PCIe Module  
 Test Item : RF Antenna Conducted Spurious  
 Test Site : No.3 OATS  
 Test Mode : Mode 12: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Omni Antenna)

**Channel 1 (5780MHz) 30MHz -40GHz- Chaia A**

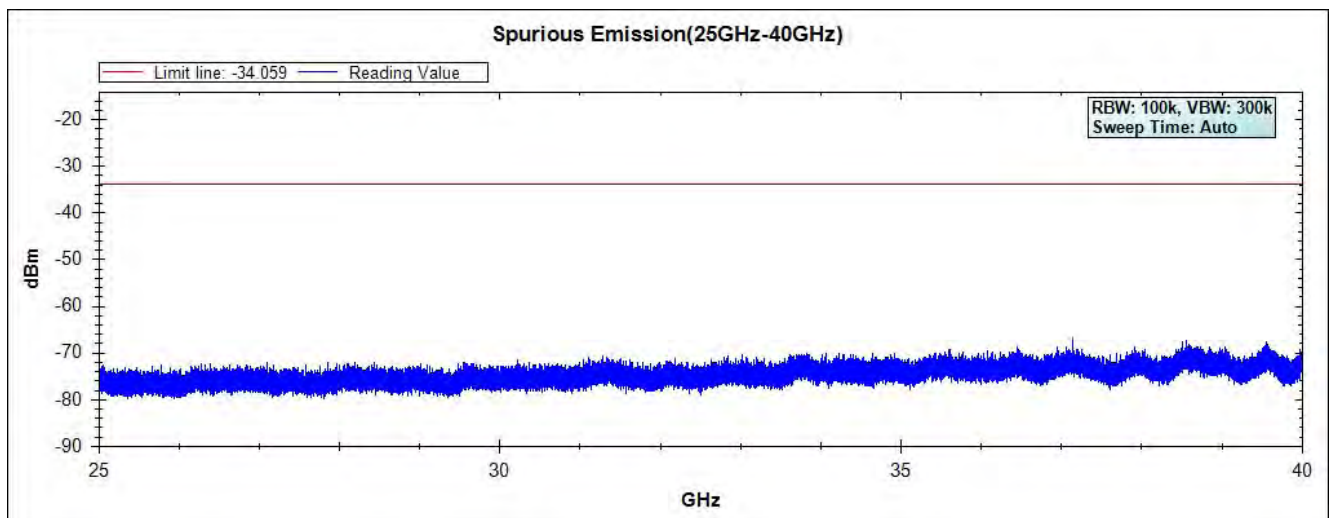
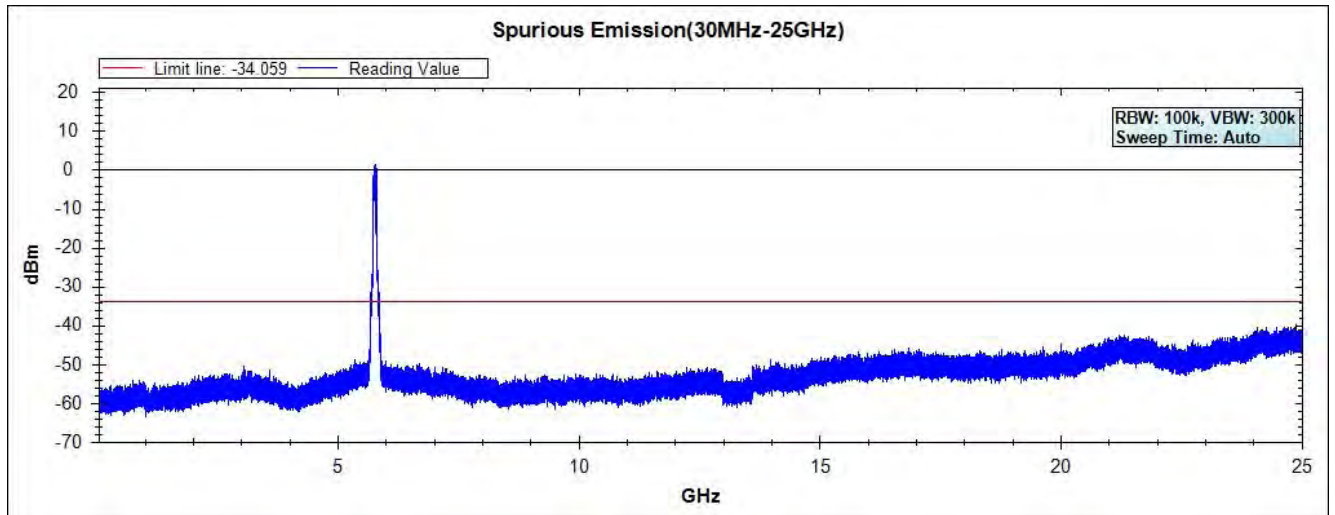


### Channel 1 (5780MHz) 30MHz -40GHz- Chaia B

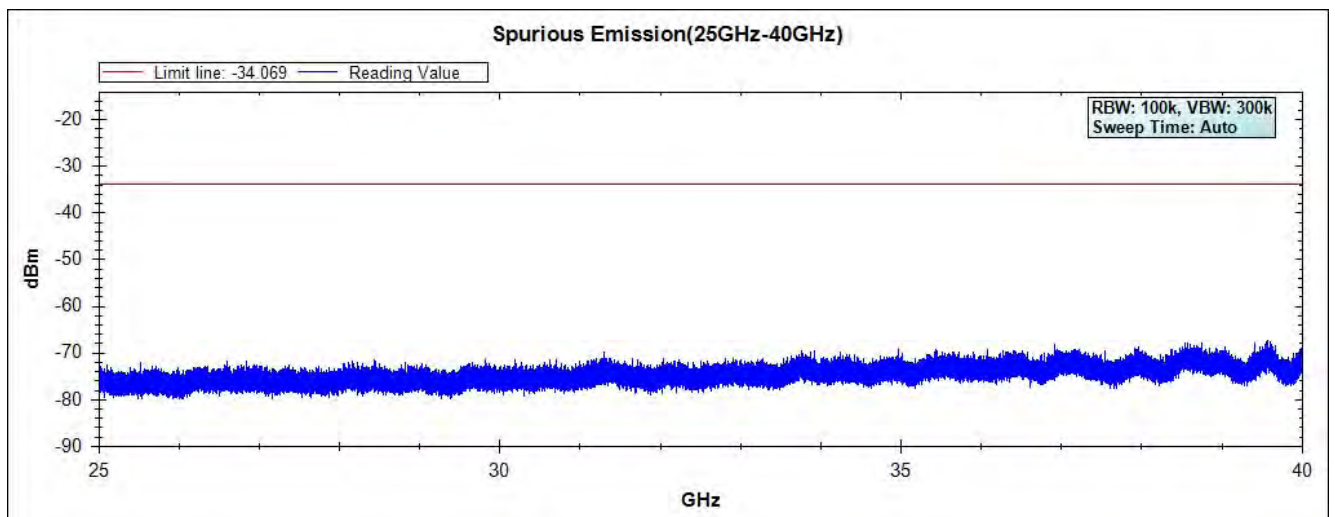
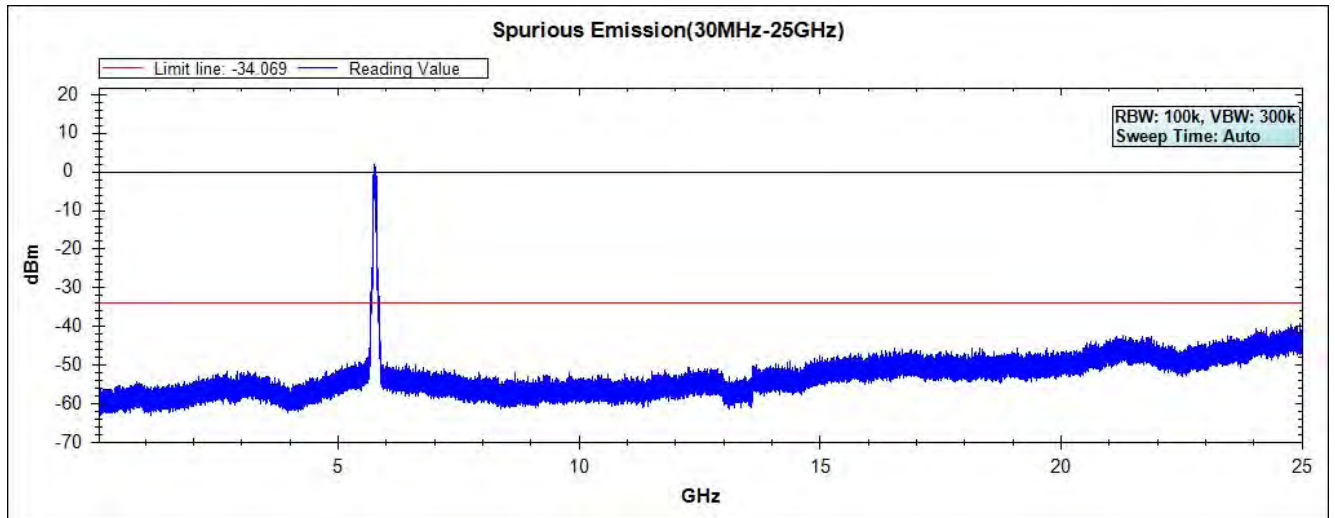


Product : 802.11 ac PCIe Module  
 Test Item : RF Antenna Conducted Spurious  
 Test Site : No.3 OATS  
 Test Mode : Mode 13: Transmit - 802.11a\_6Mbps(Panel Antenna)



### Channel 149 (5745MHz) 30MHz -40GHz-Chain A

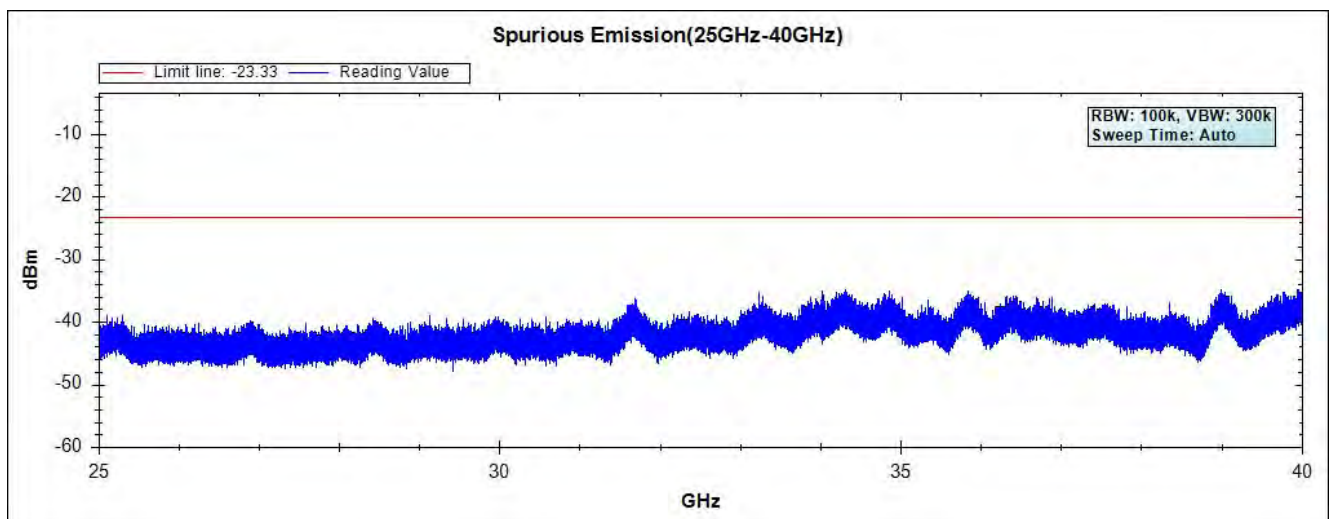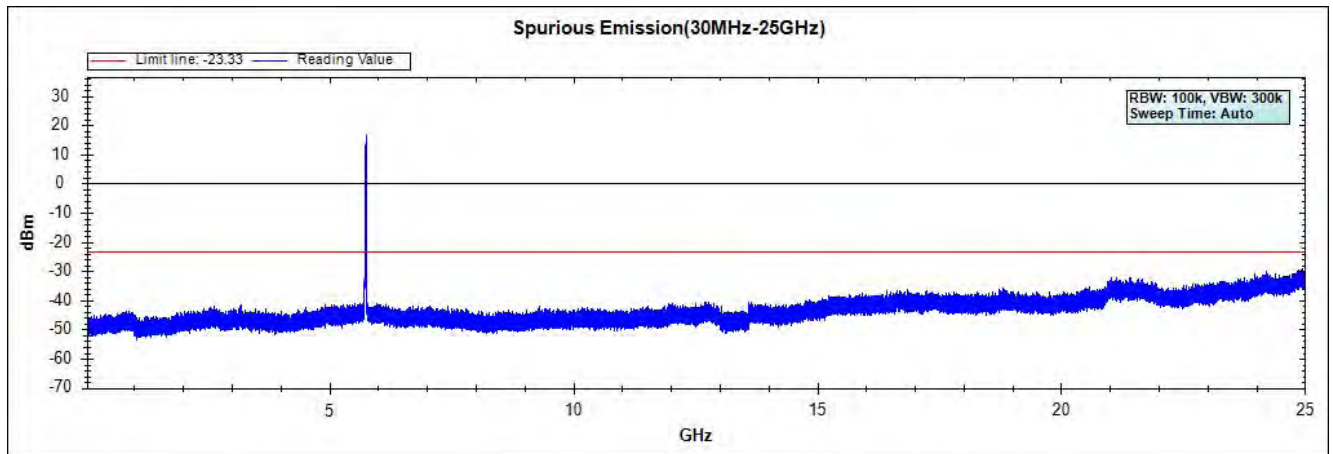



### Channel 157 (5785MHz) 30MHz -40GHz-Chain A

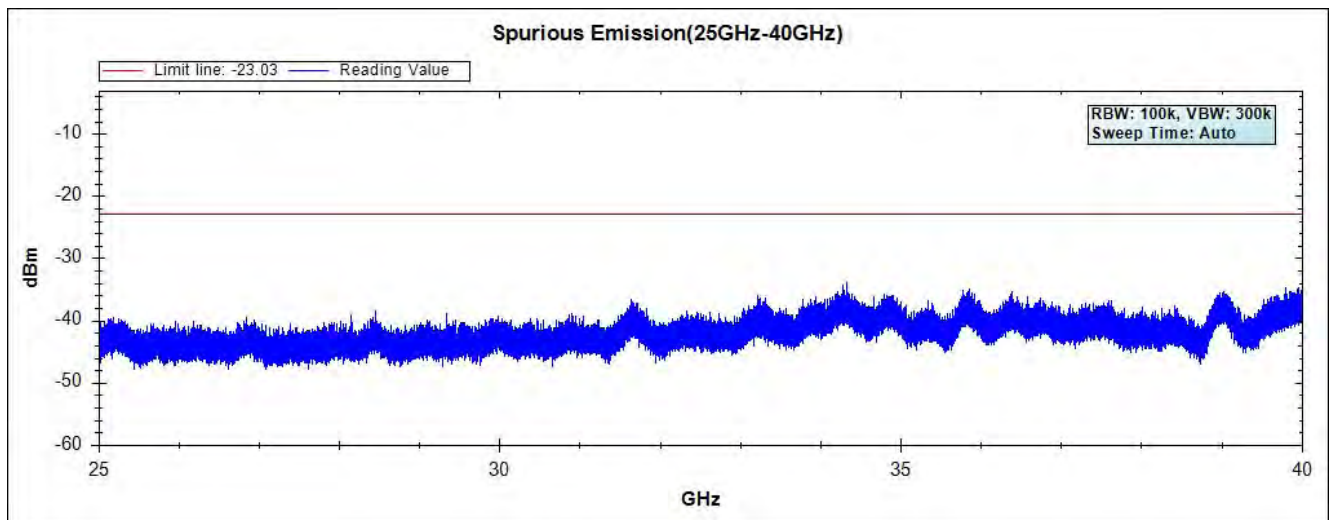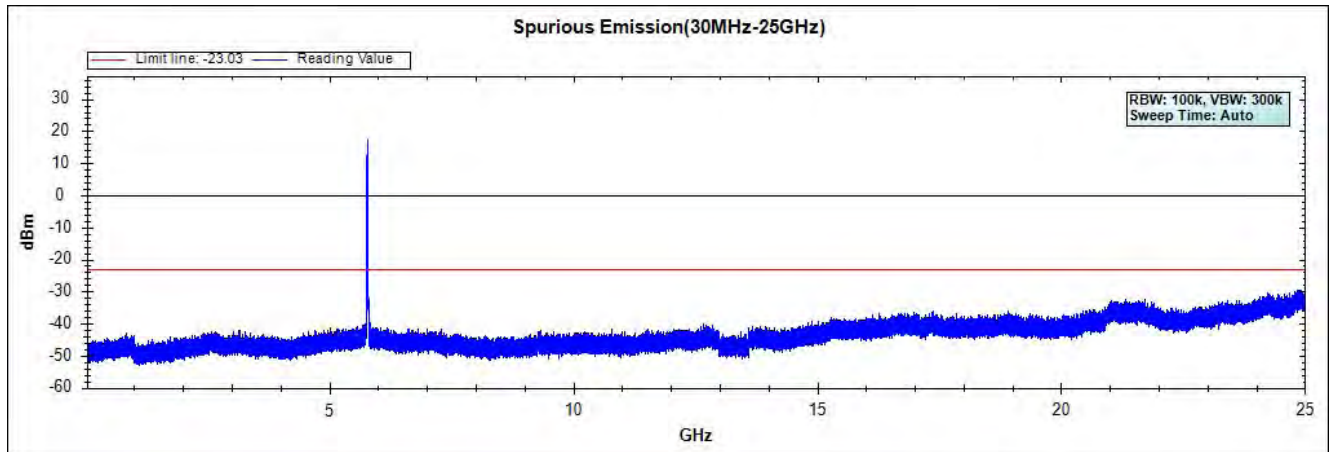



### Channel 165 (5825MHz) 30MHz -40GHz-Chain A

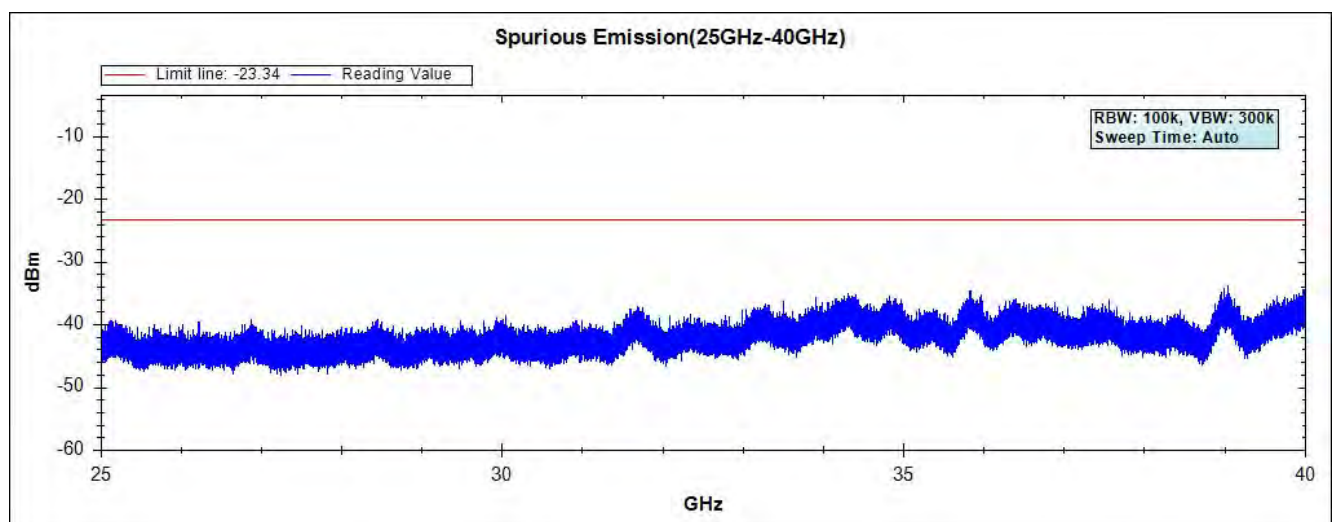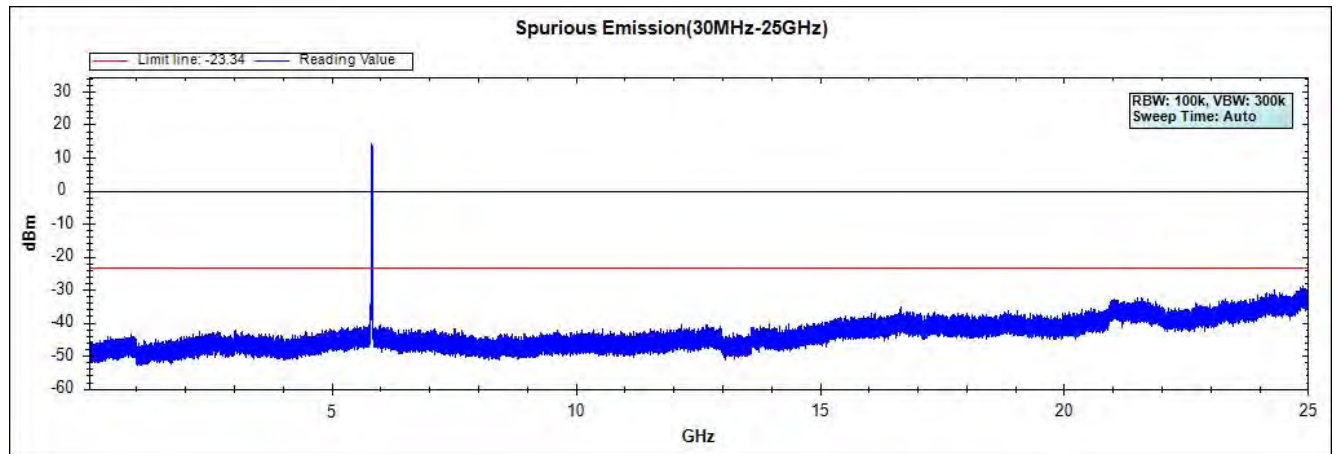



Channel 149 (5745MHz) 30MHz -40GHz-Chain B

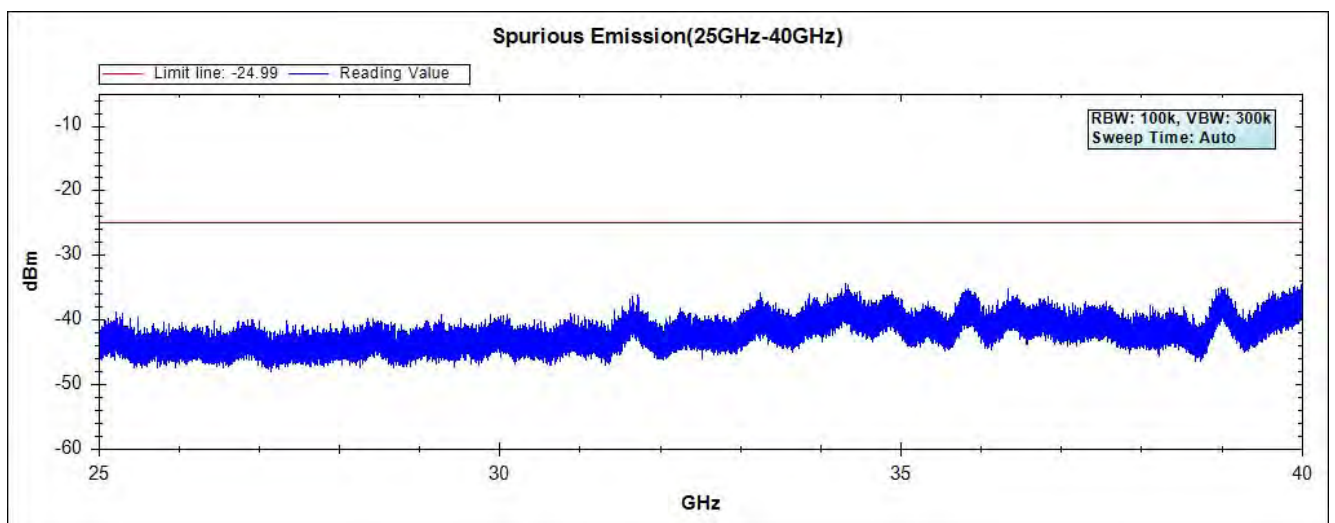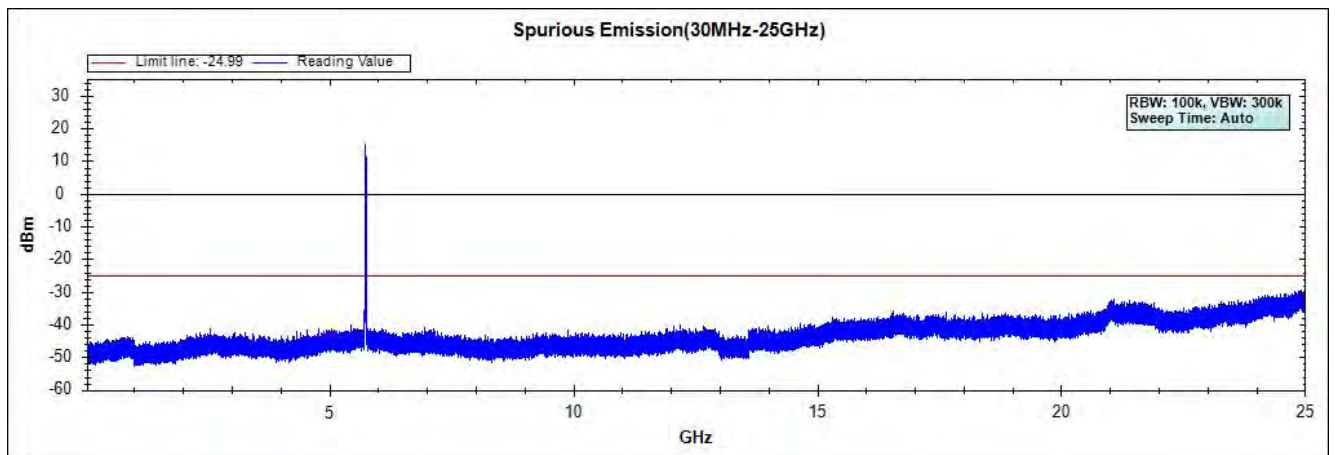

Channel 157 (5785MHz) 30MHz -40GHz-Chain B

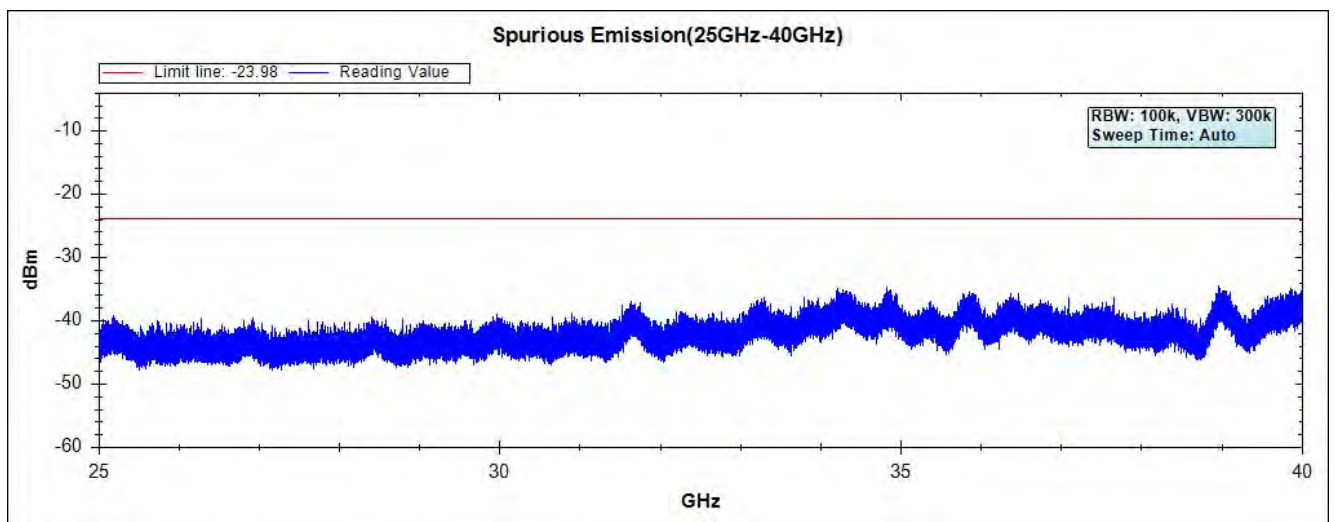
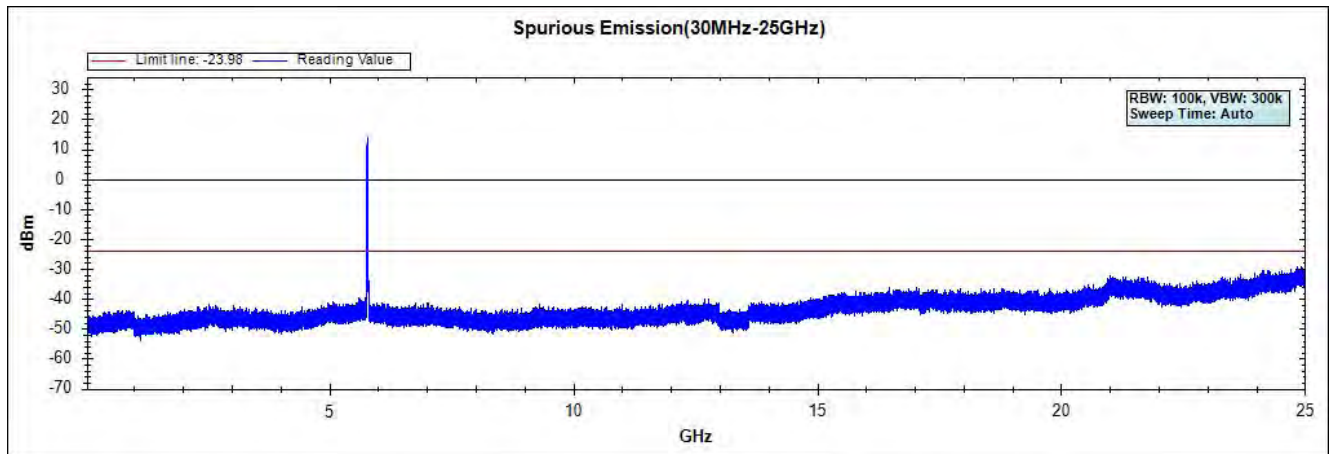


**Channel 165 (5825MHz) 30MHz -40GHz-Chain B**

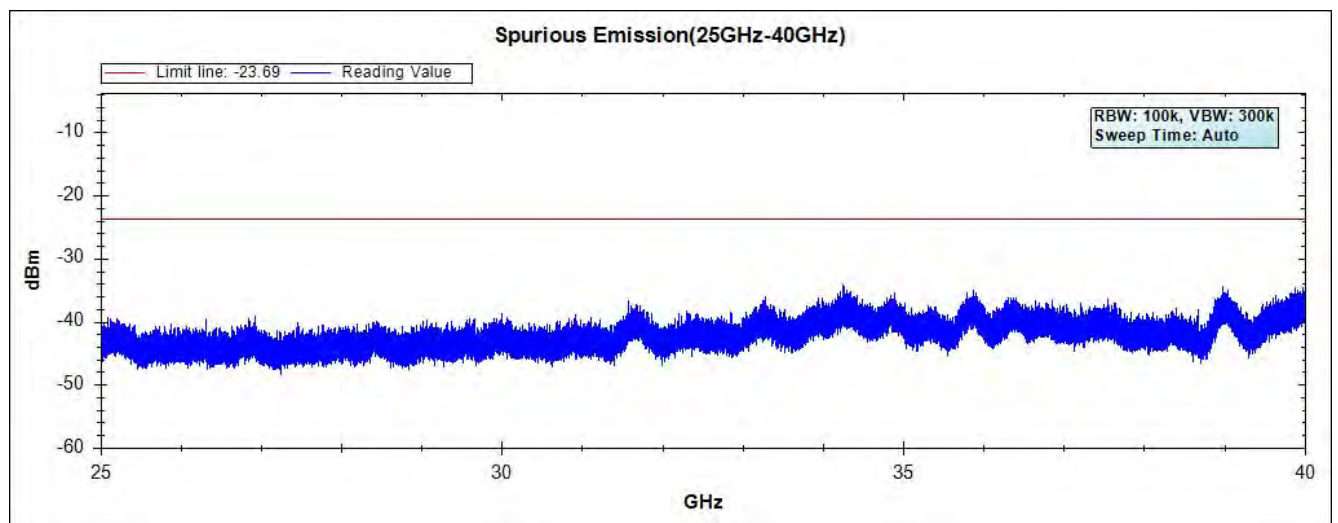
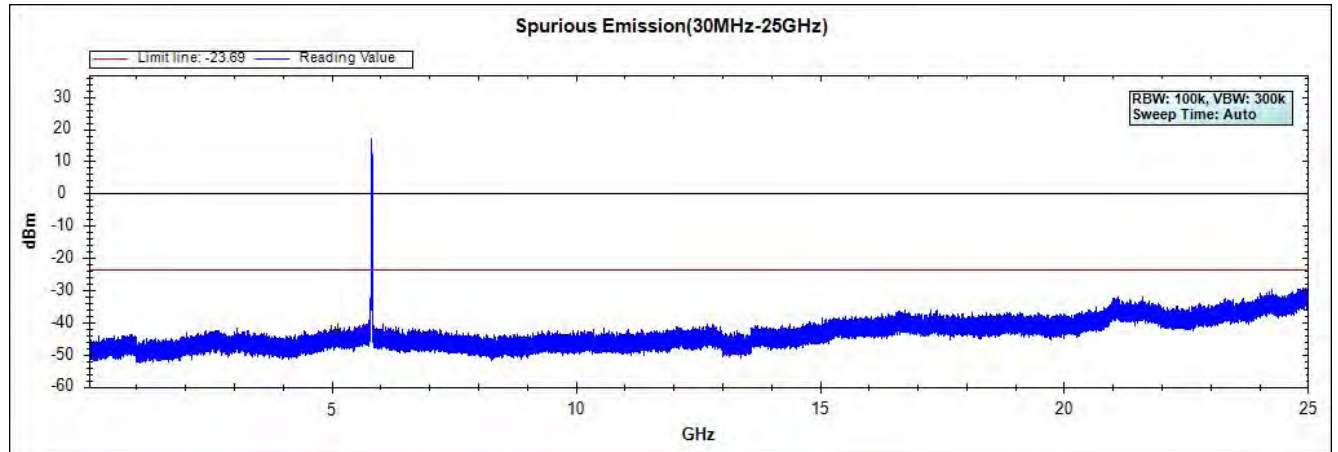


Product : 802.11 ac PCIe Module  
Test Item : RF Antenna Conducted Spurious  
Test Site : No.3 OATS  
Test Mode : Mode 14: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Panel Antenna)



### Channel 49 (5745MHz) 30MHz -40GHz-Chain A

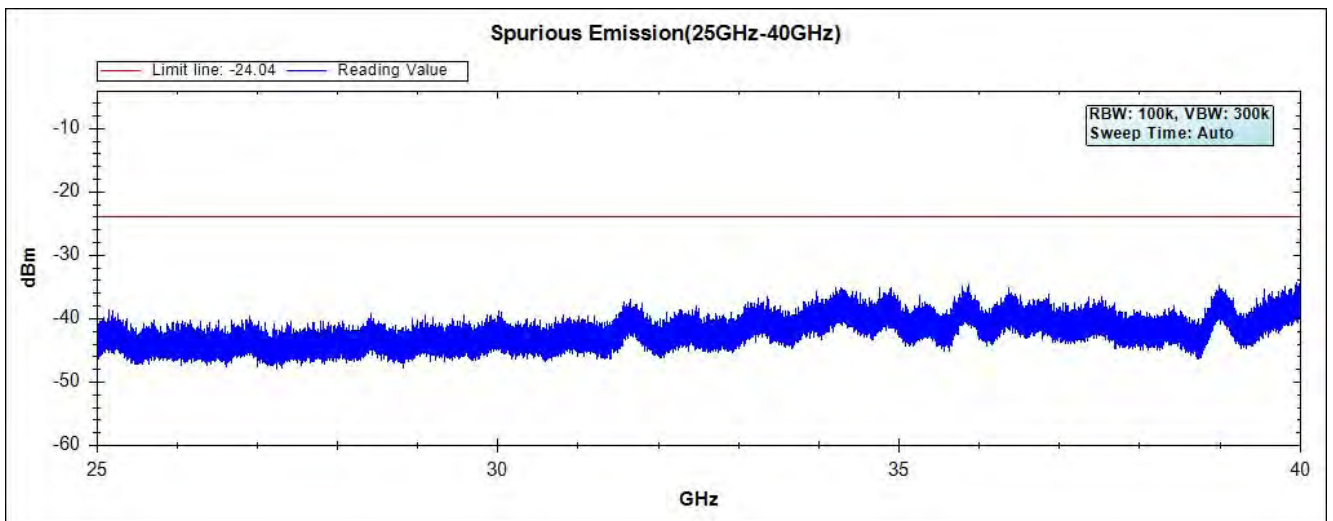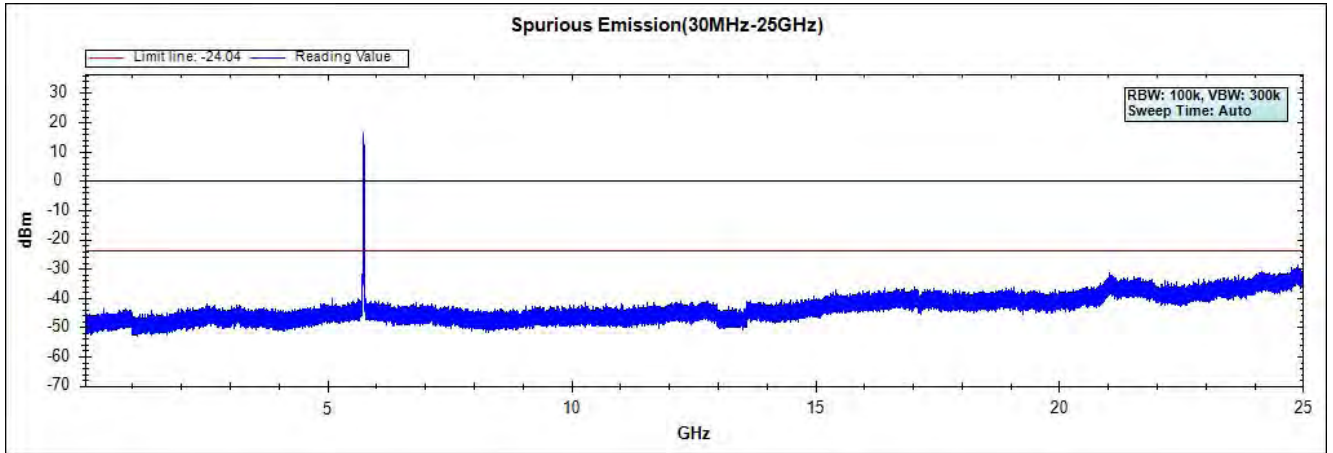



**Channel 157 (5785MHz) 30MHz -40GHz-Chain A**

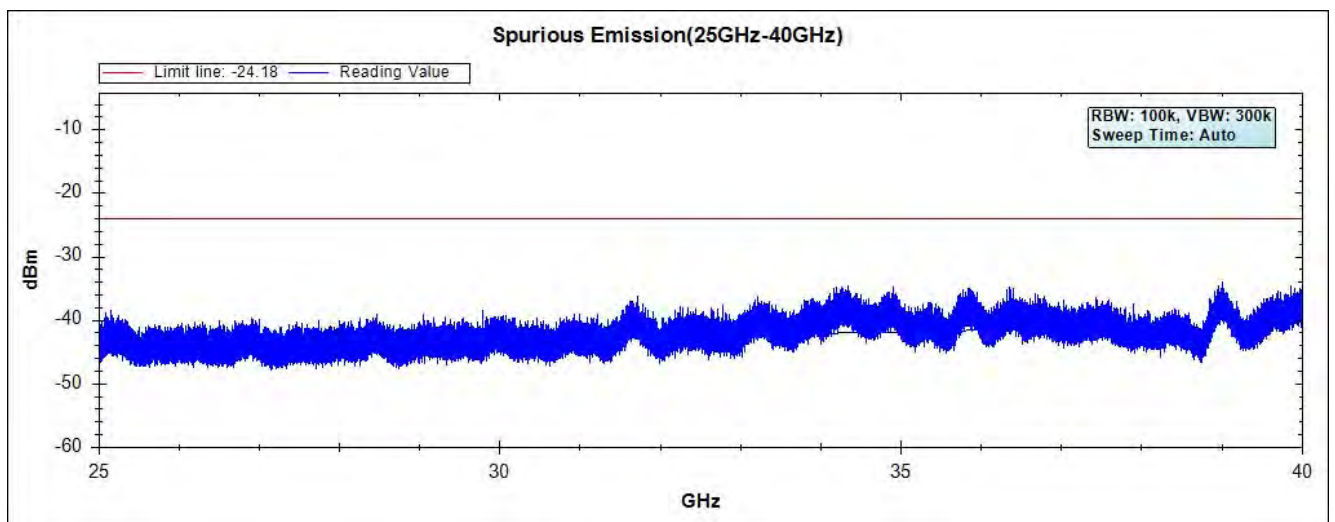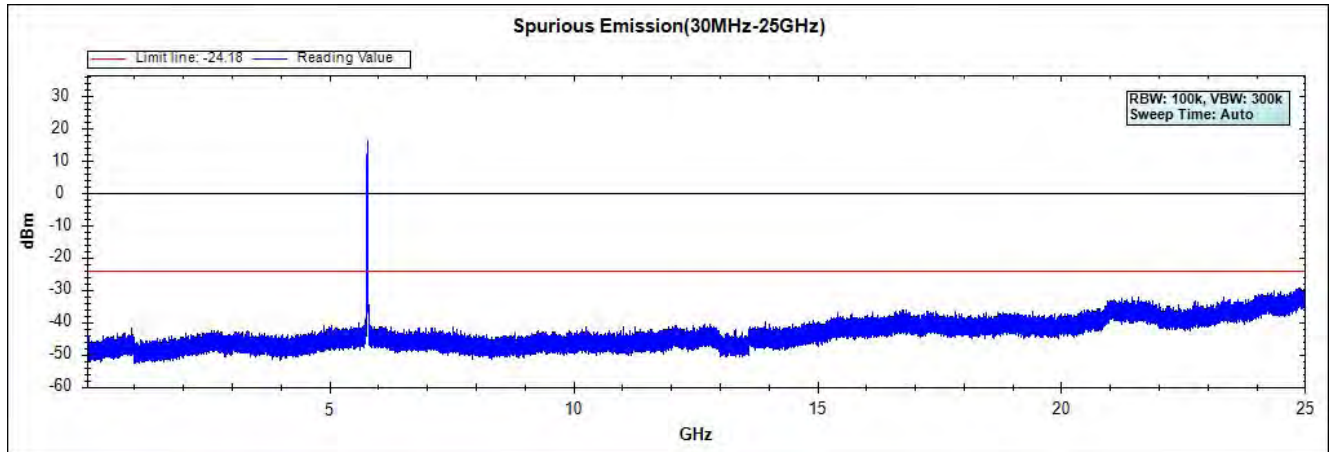



### Channel 165 (5825MHz) 30MHz -40GHz-Chain A

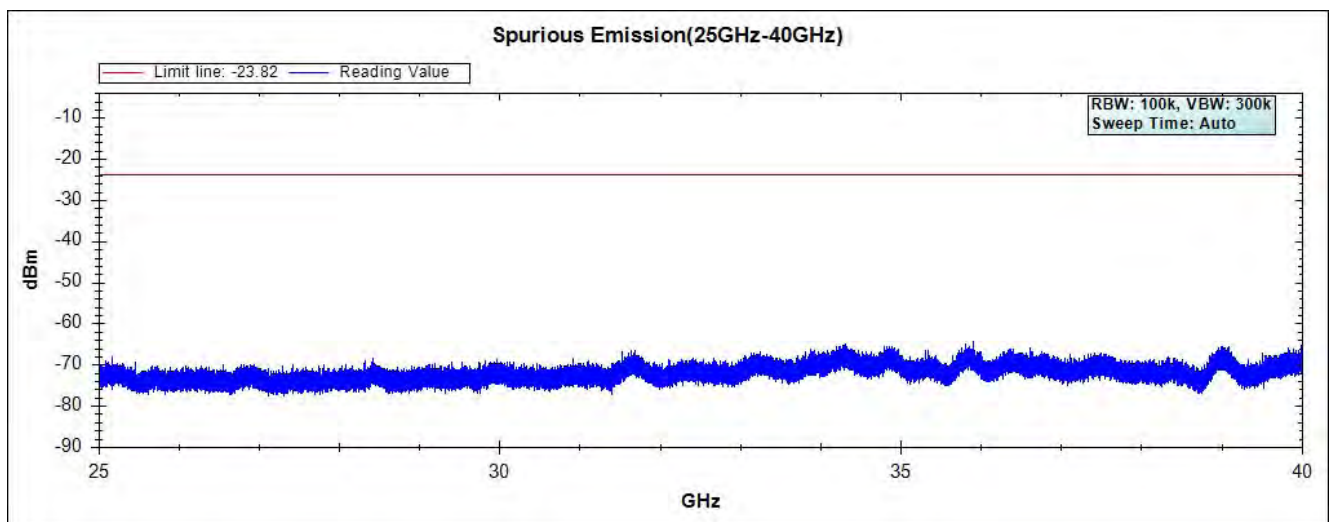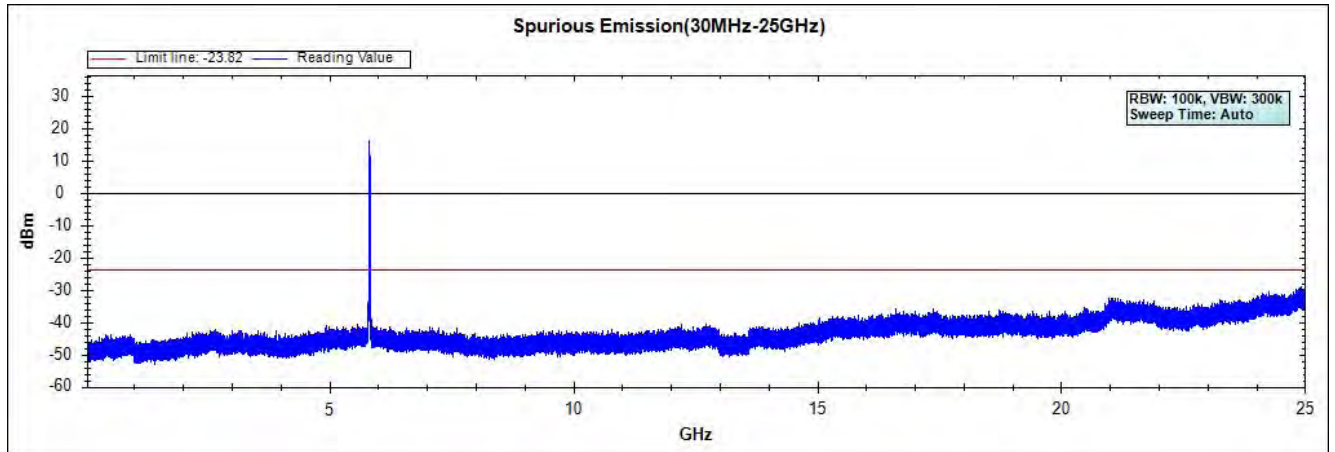



Channel 49 (5745MHz) 30MHz -40GHz-Chain B

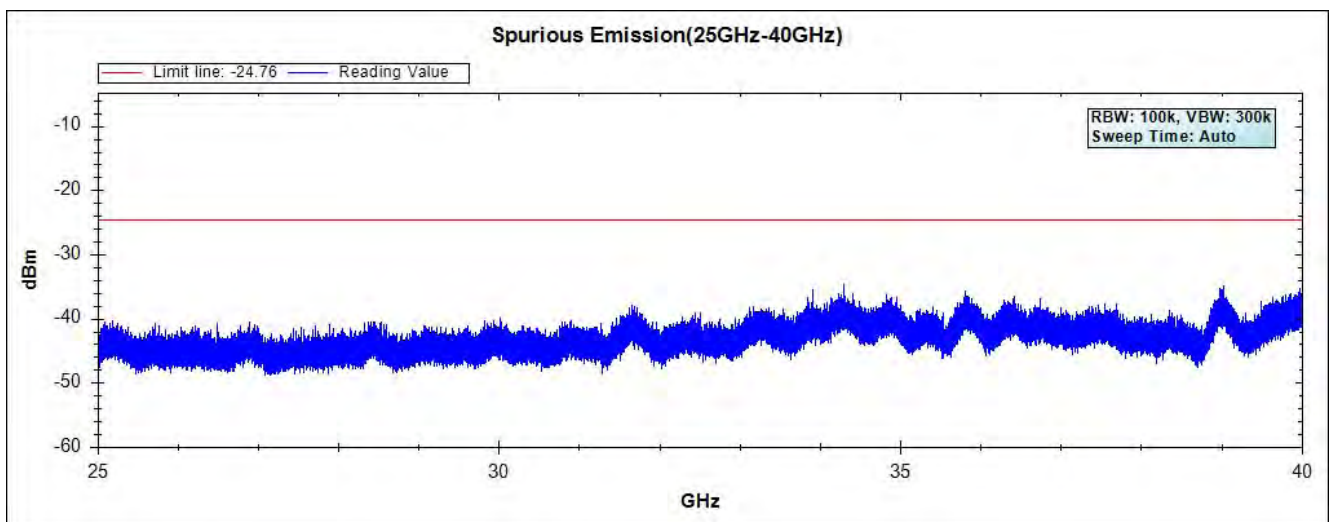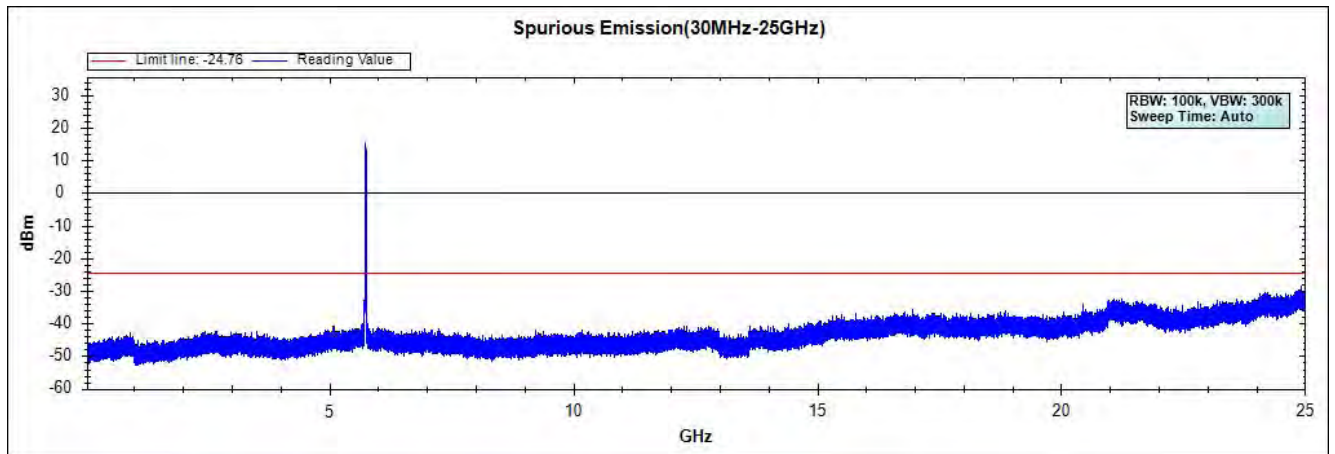

**Channel 157 (5785MHz) 30MHz -40GHz-Chain B**

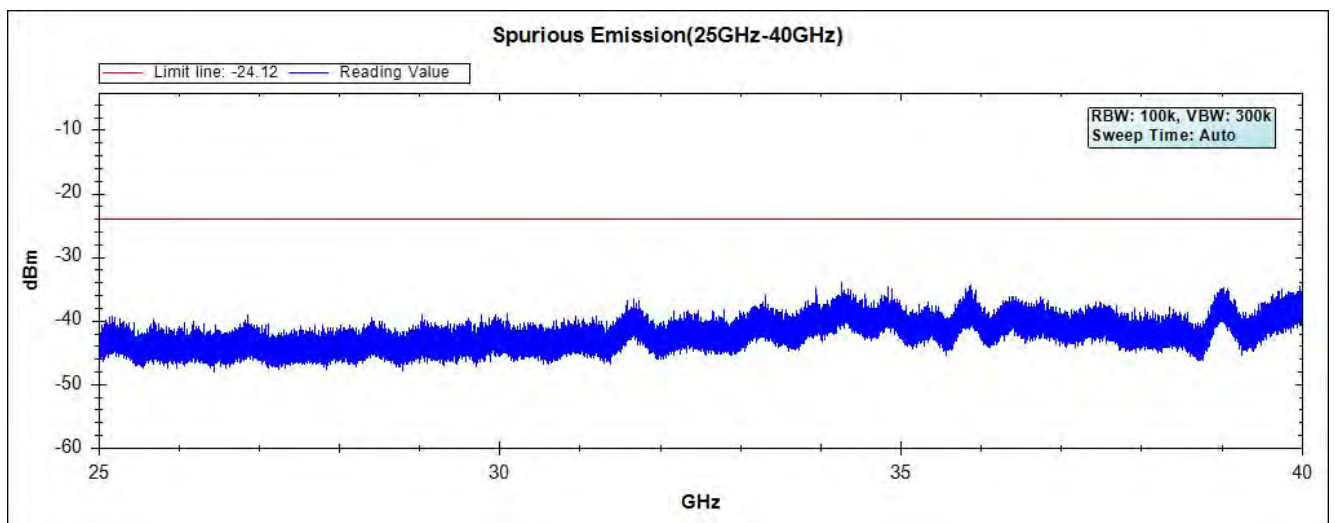
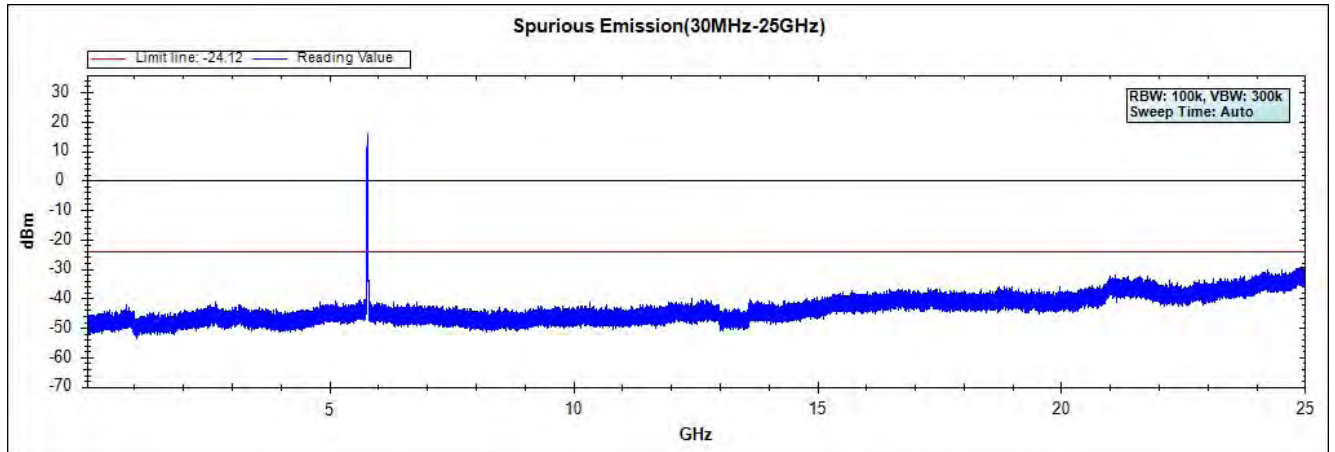


### Channel 165 (5825MHz) 30MHz -40GHz-Chain B

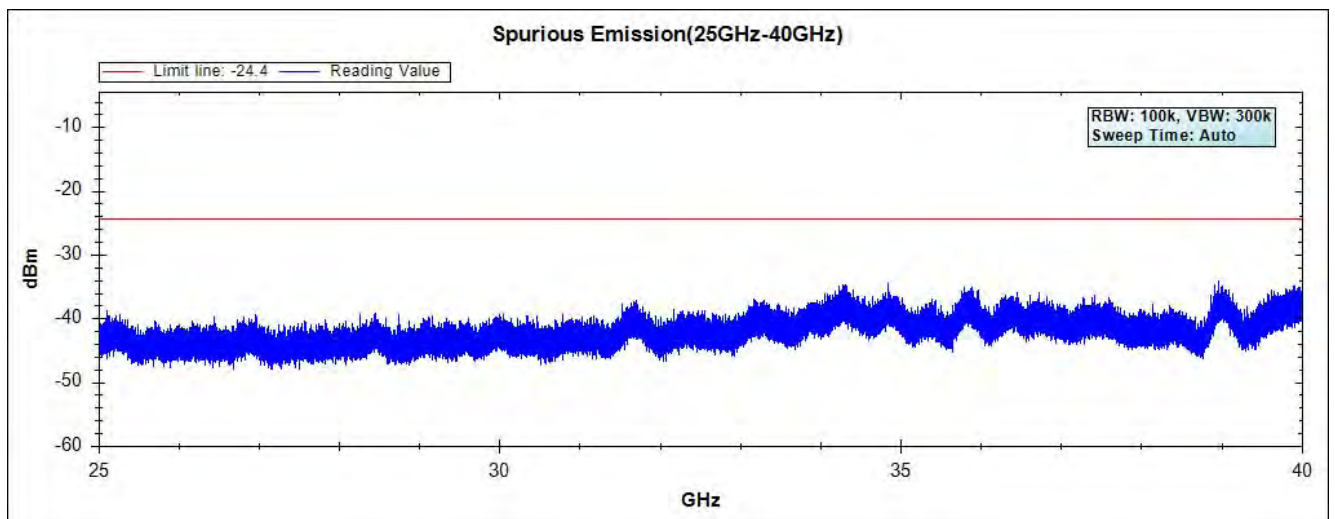
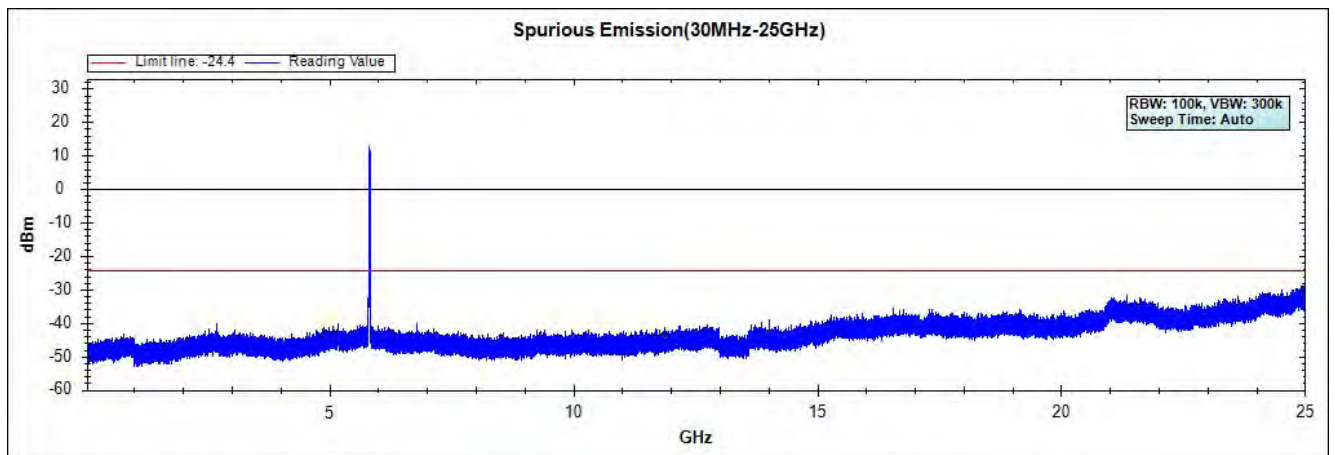


Product : 802.11 ac PCIe Module  
 Test Item : RF Antenna Conducted Spurious  
 Test Site : No.3 OATS  
 Test Mode : Mode 15: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Panel Antenna)



### Channel 151 (5755MHz) 30MHz -40GHz-Chain A

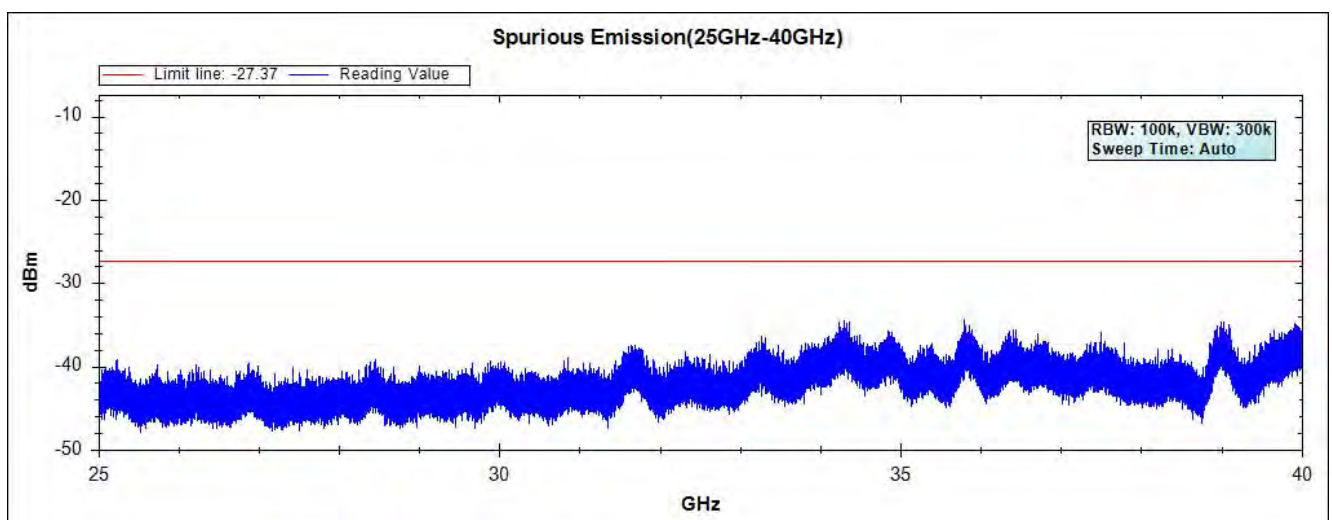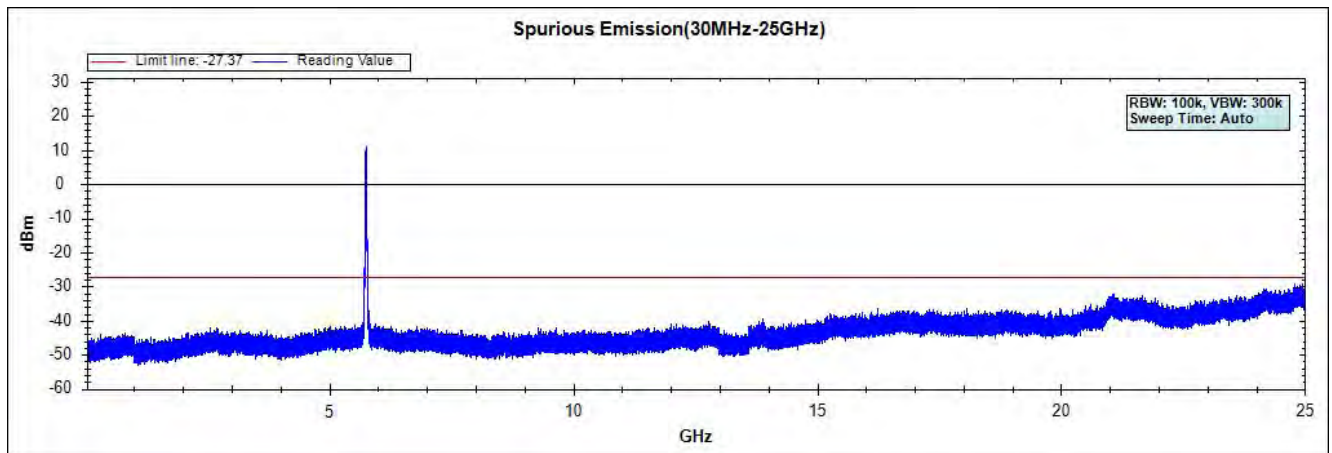



**Channel 159 (5795MHz) 30MHz -40GHz-Chain A**

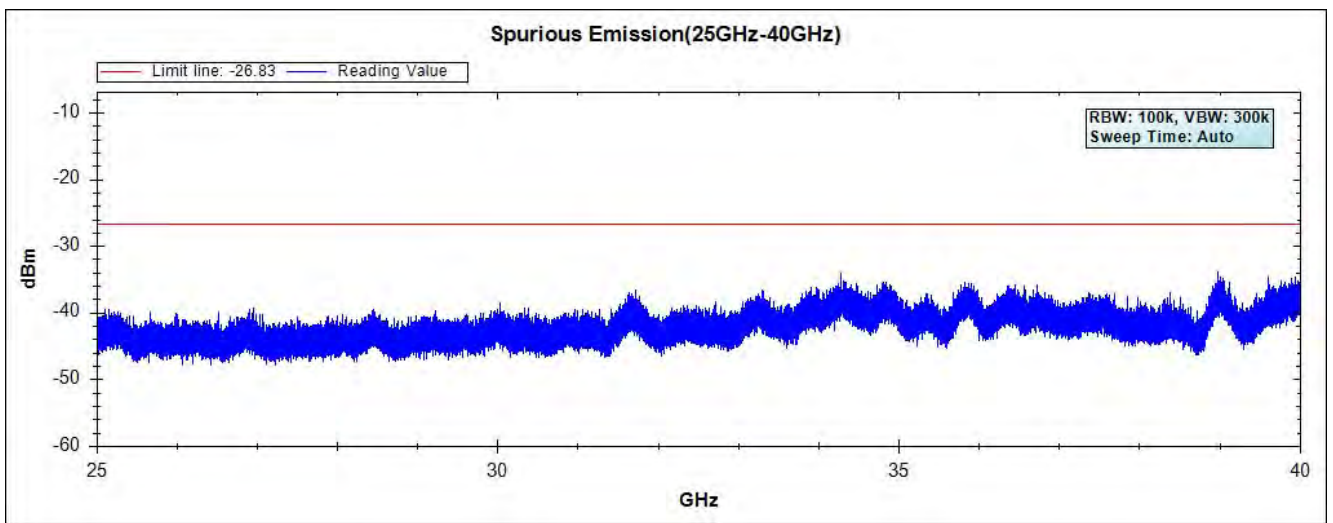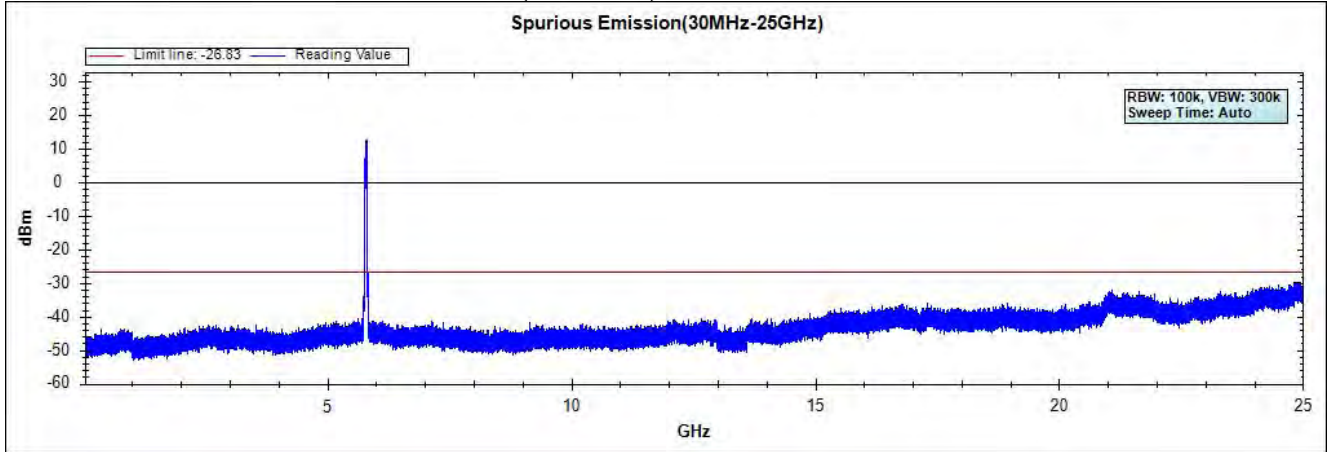

Channel 151 (5755MHz) 30MHz -40GHz-Chain B

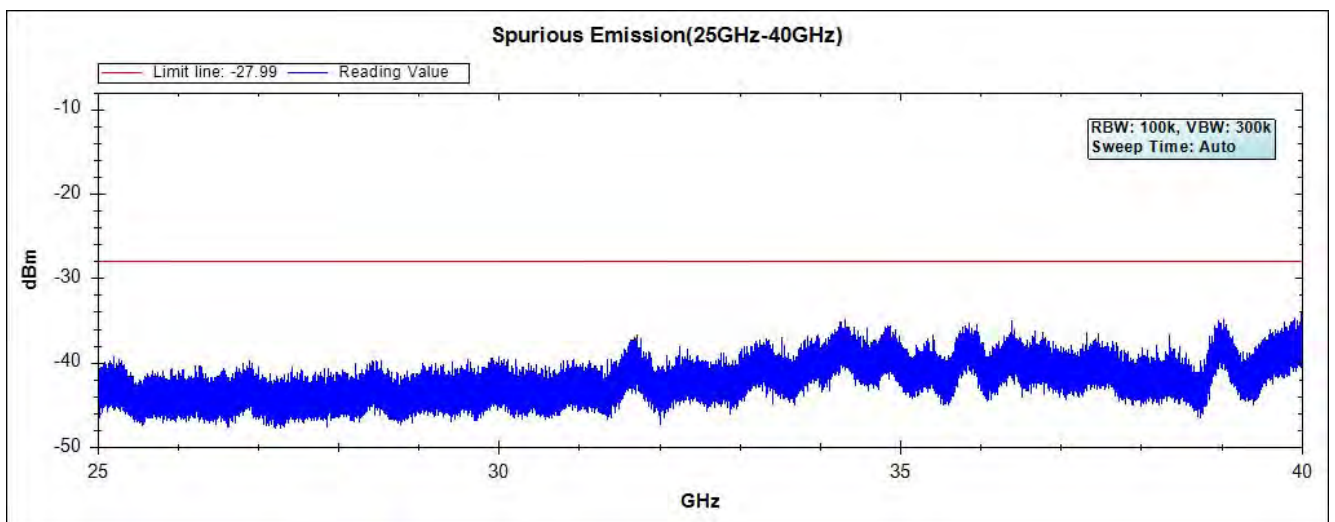
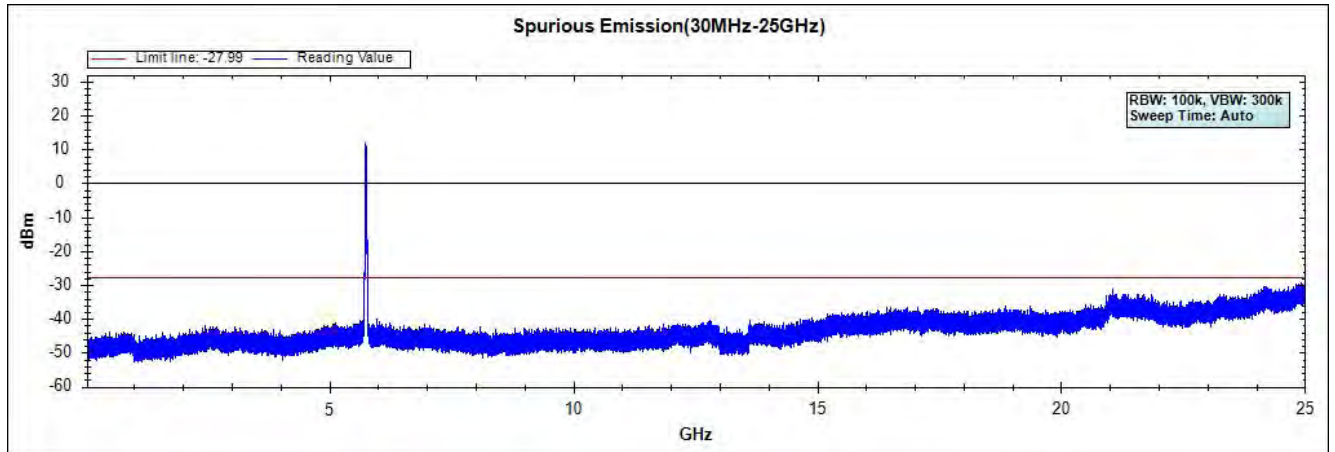


**Channel 159 (5795MHz) 30MHz -40GHz-Chain B**

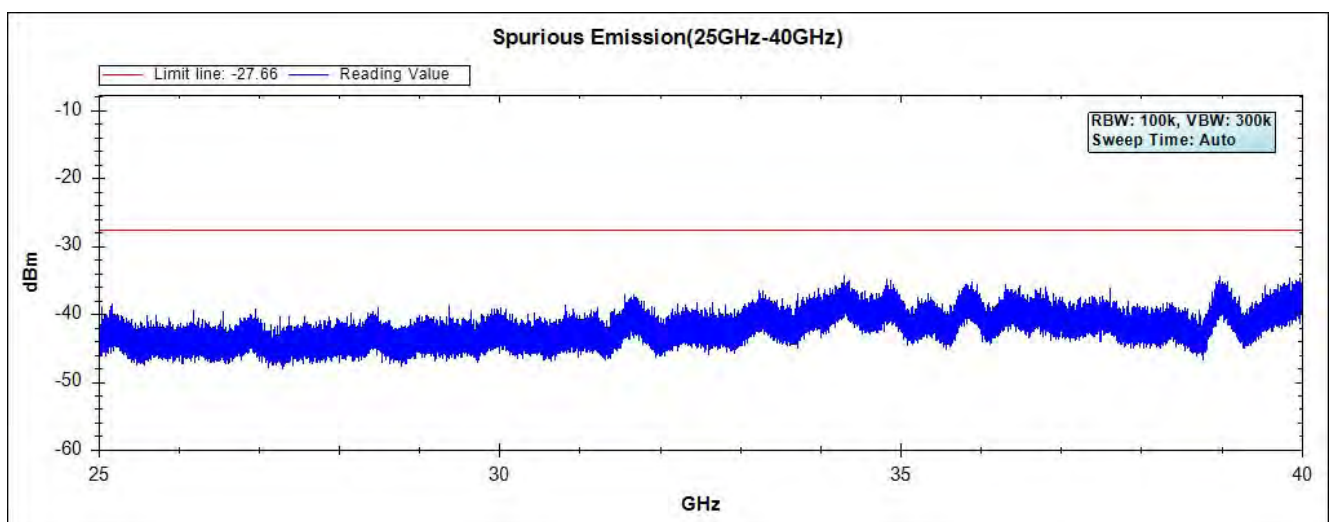
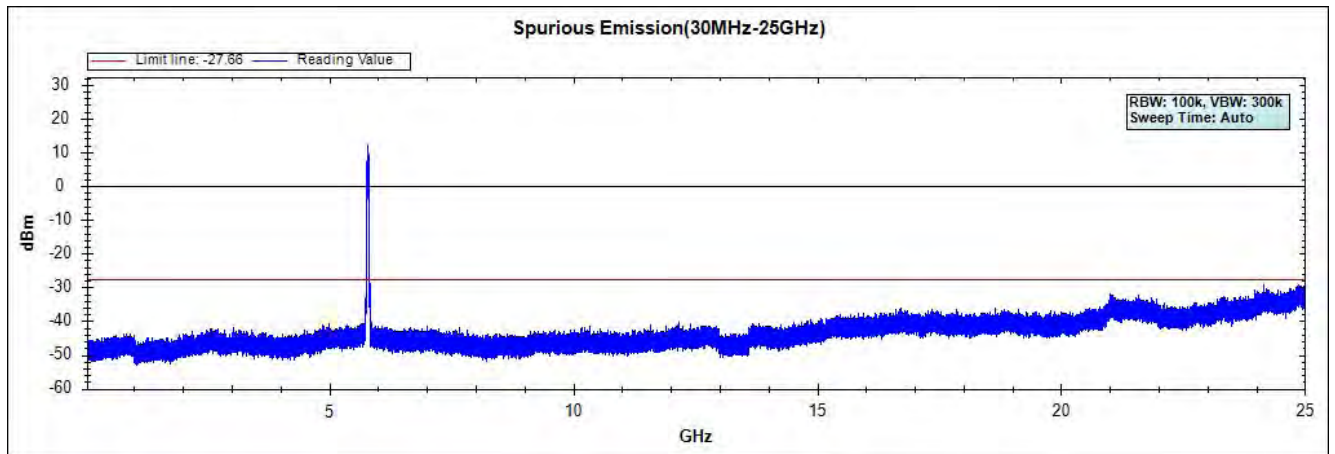


Product : 802.11 ac PCIe Module  
Test Item : RF Antenna Conducted Spurious  
Test Site : No.3 OATS  
Test Mode : Mode 16: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Panel Antenna)

### Channel 1 (5780MHz) 30MHz -40GHz- Chaia A

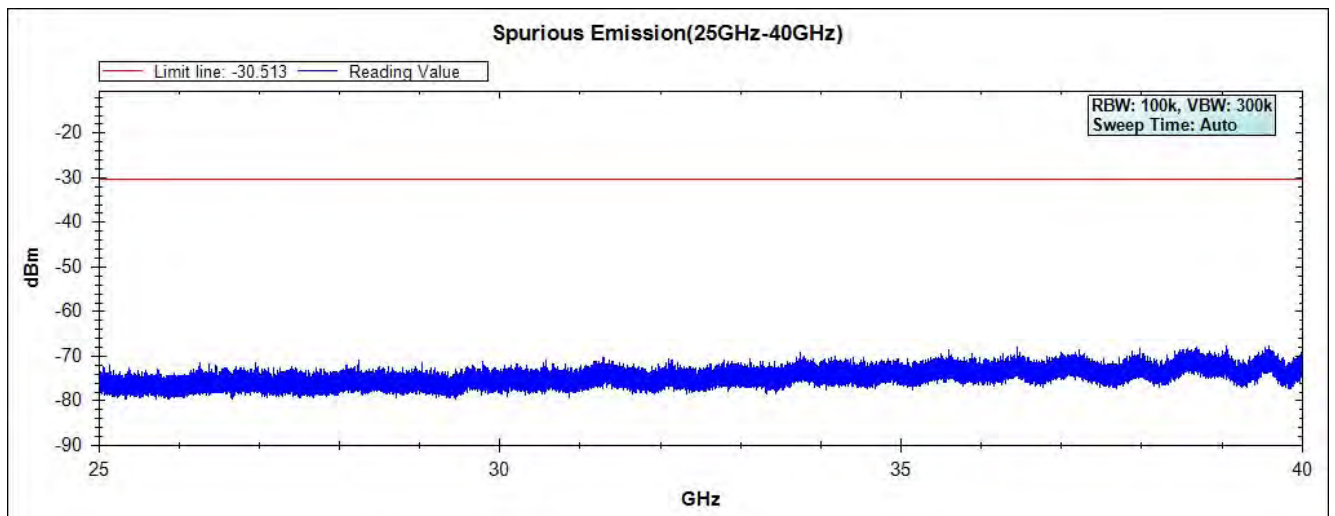
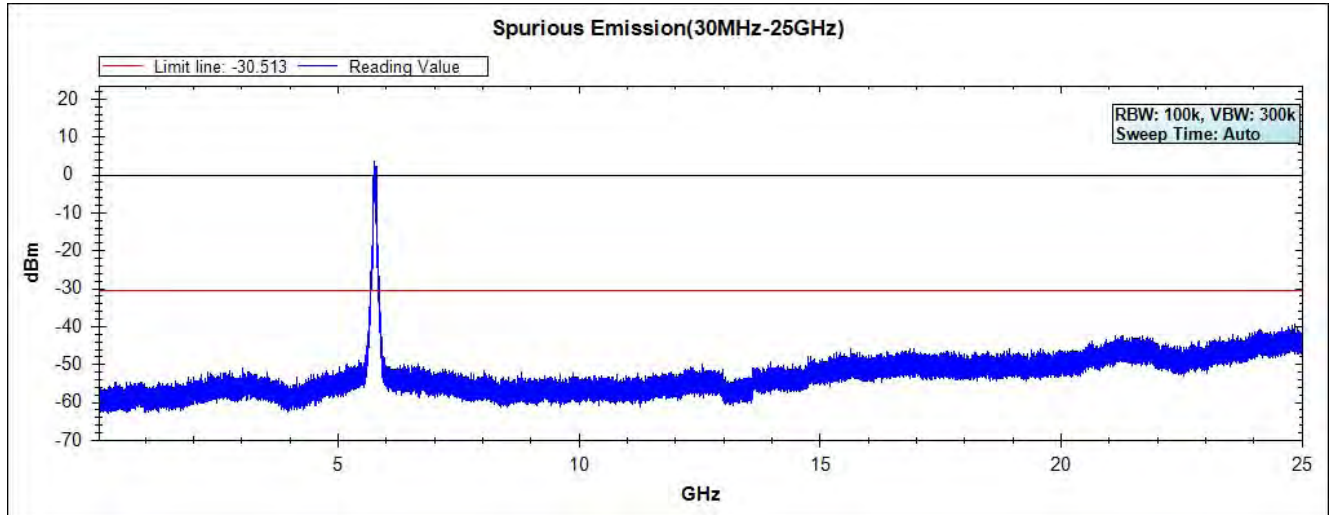


**Channel 1 (5780MHz) 30MHz -40GHz- Chaia B**

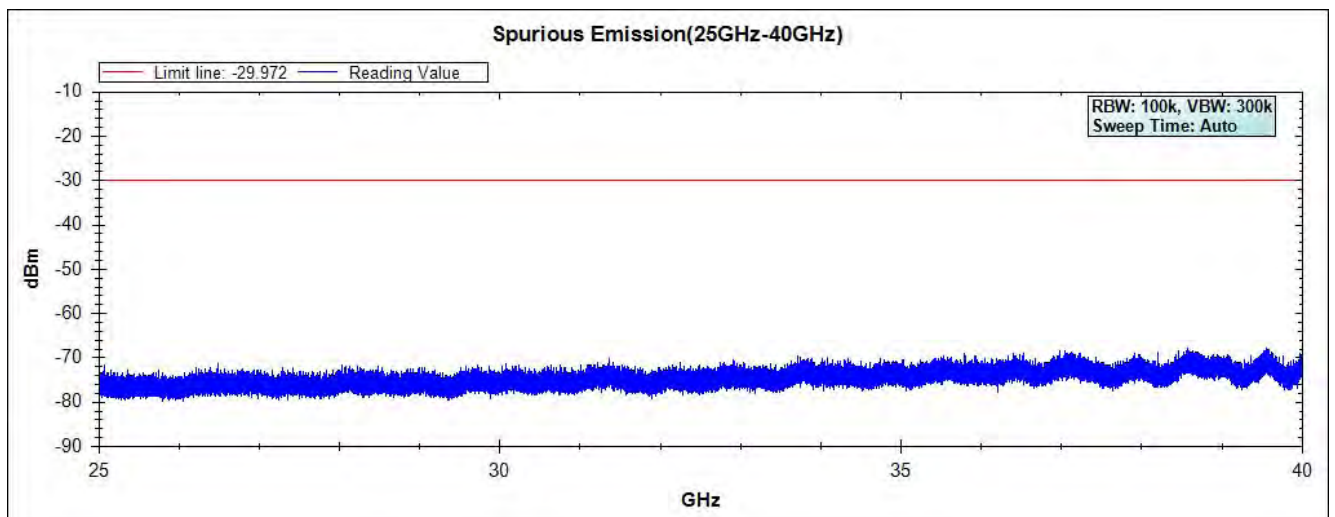
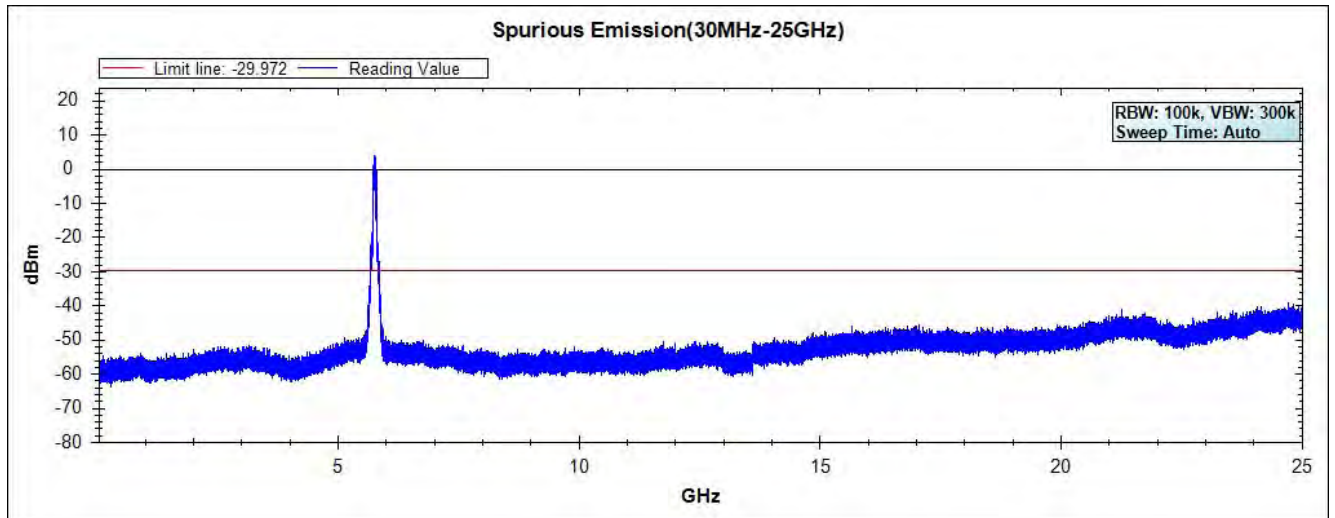


Product : 802.11 ac PCIe Module  
 Test Item : RF Antenna Conducted Spurious  
 Test Site : No.3 OATS  
 Test Mode : Mode 17: Transmit - 802.11a\_6Mbps(Sector Antenna)



### Channel 149 (5745MHz) 30MHz -40GHz-Chain A

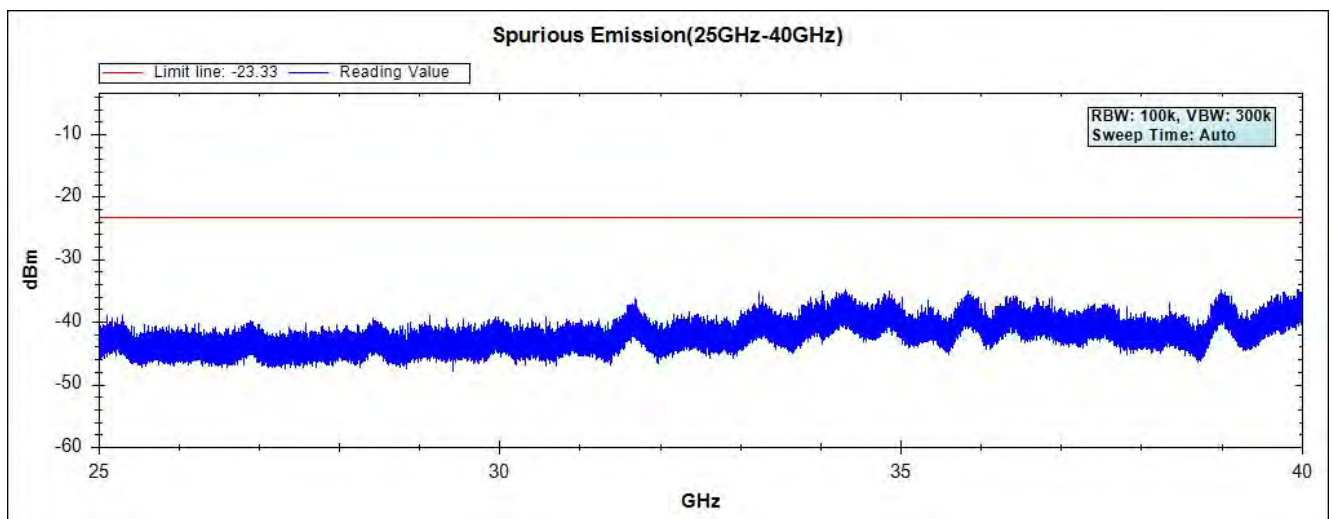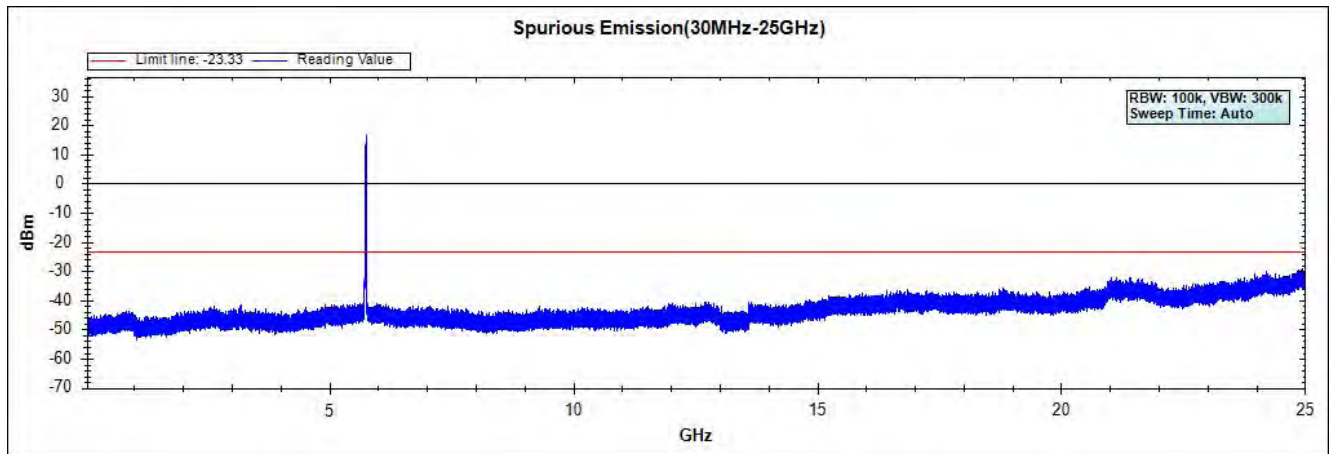



### Channel 157 (5785MHz) 30MHz -40GHz-Chain A

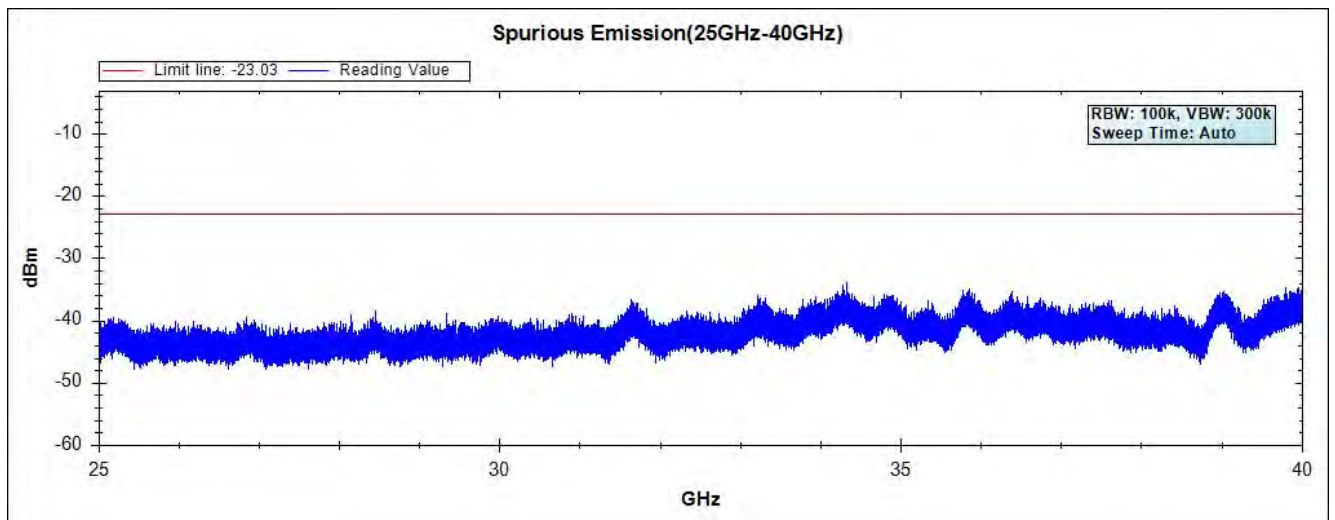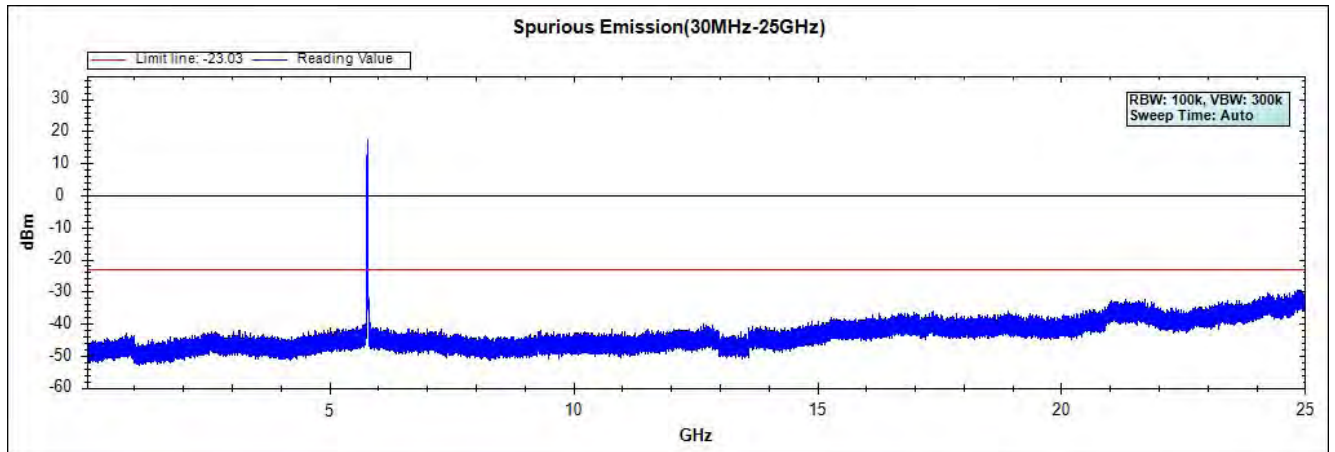



**Channel 165 (5825MHz) 30MHz -40GHz-Chain A**

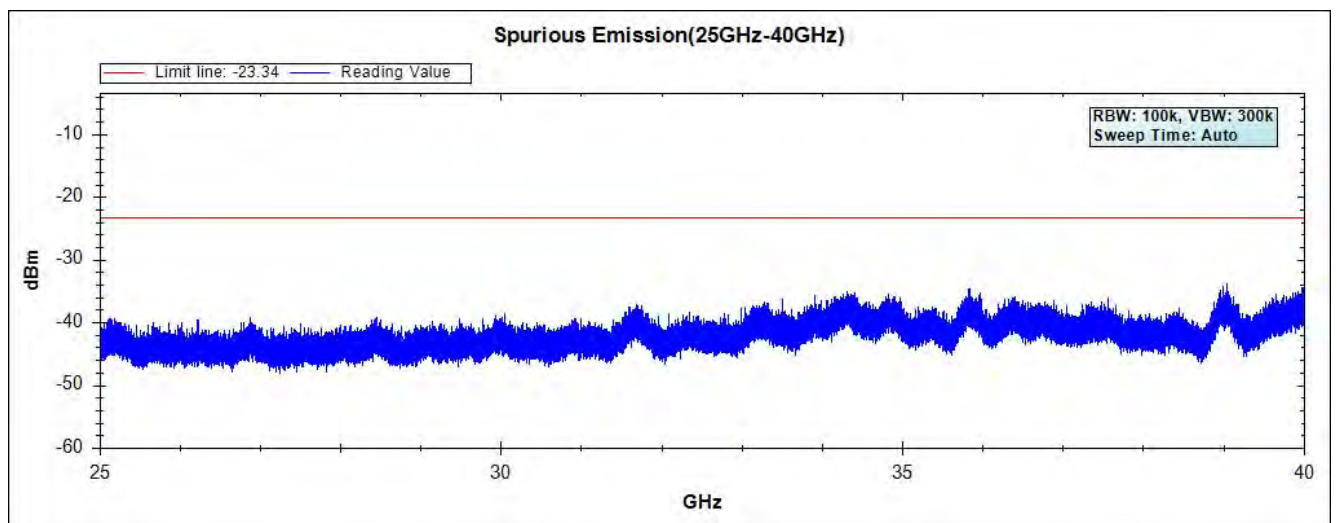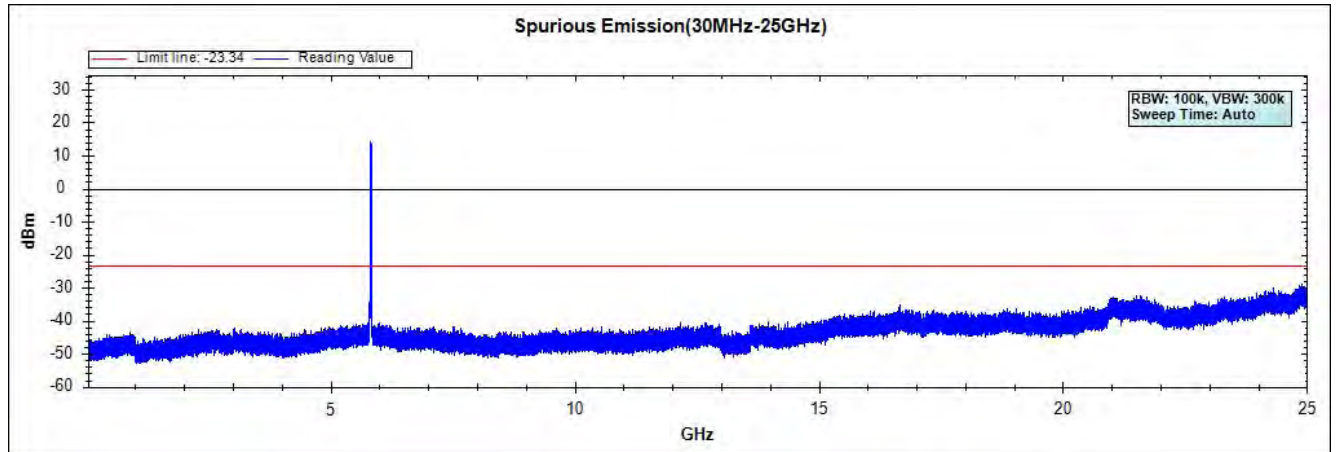



**Channel 149 (5745MHz) 30MHz -40GHz-Chain B**

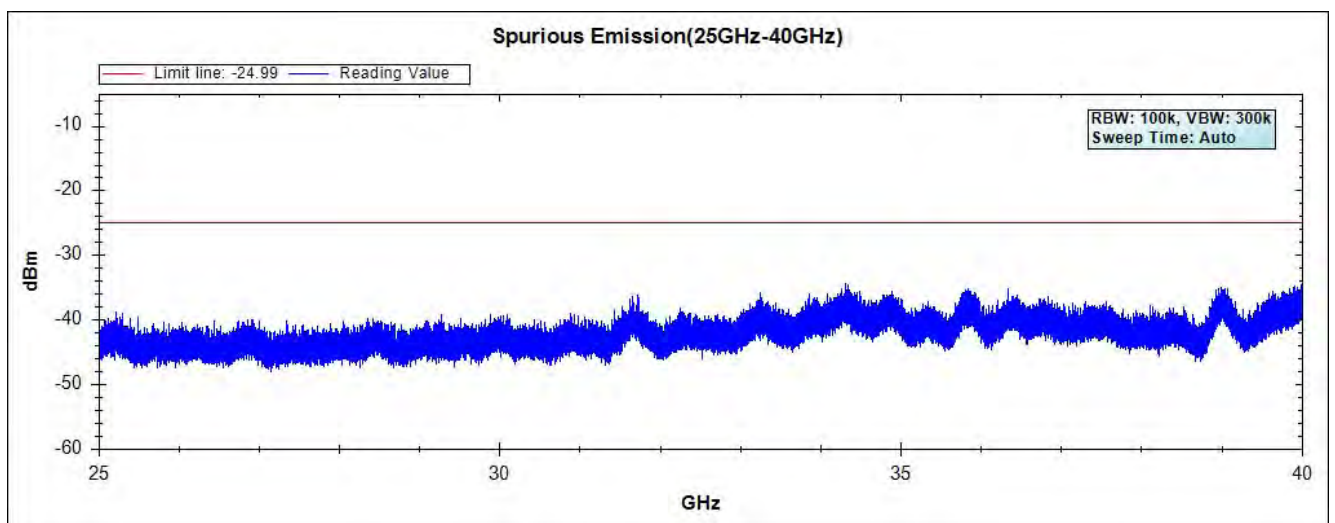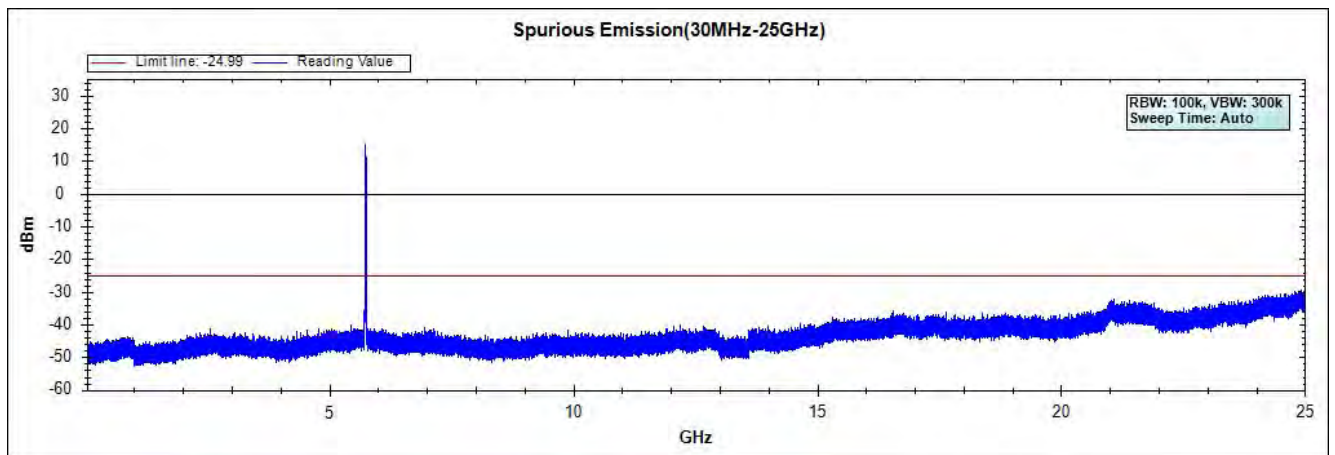

**Channel 157 (5785MHz) 30MHz -40GHz-Chain B**

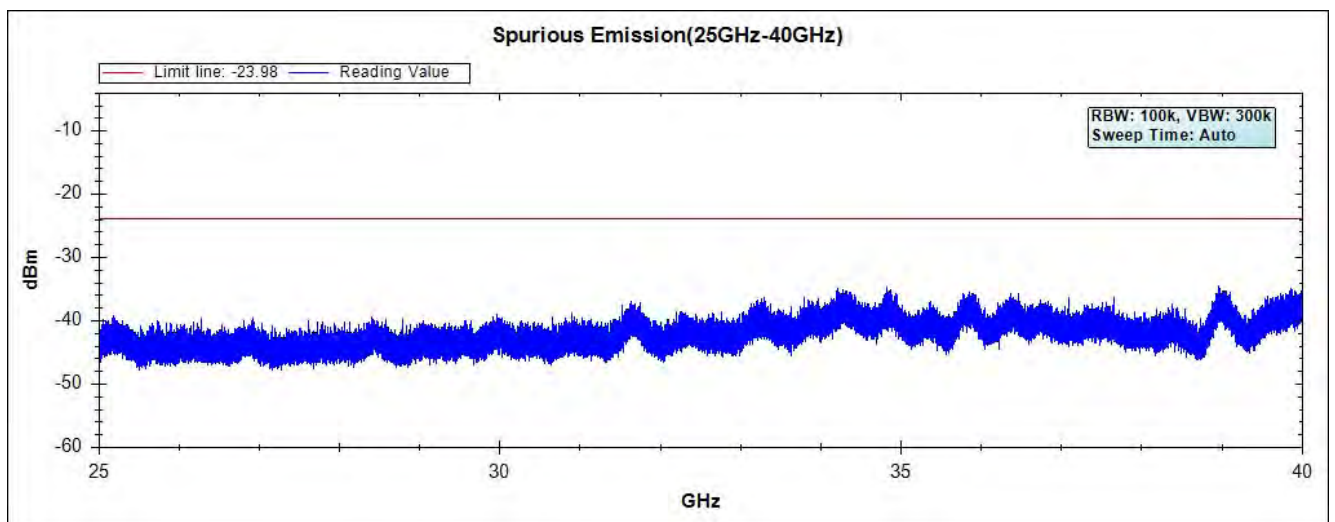
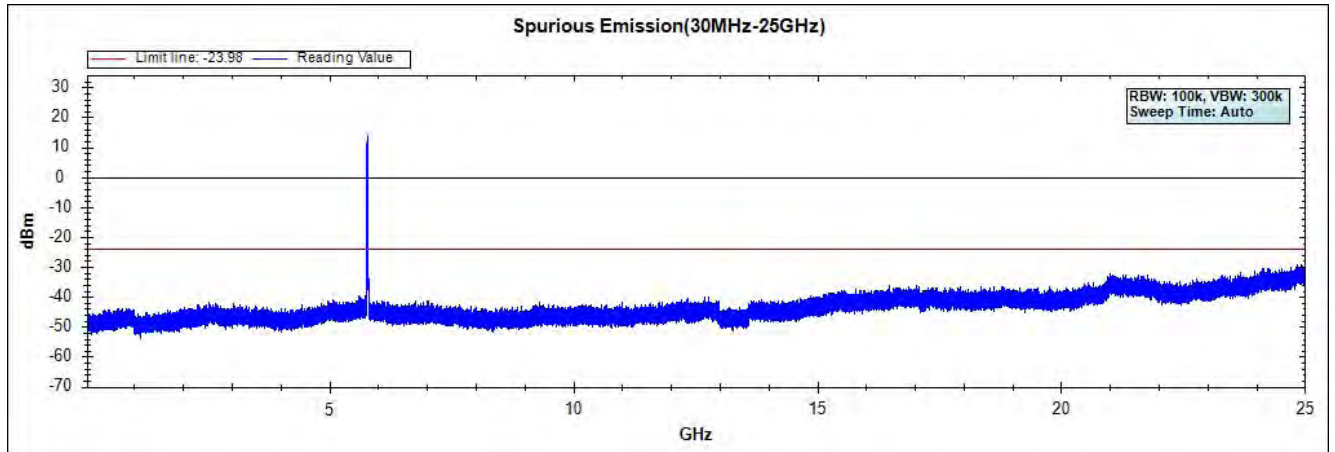


**Channel 165 (5825MHz) 30MHz -40GHz-Chain B**

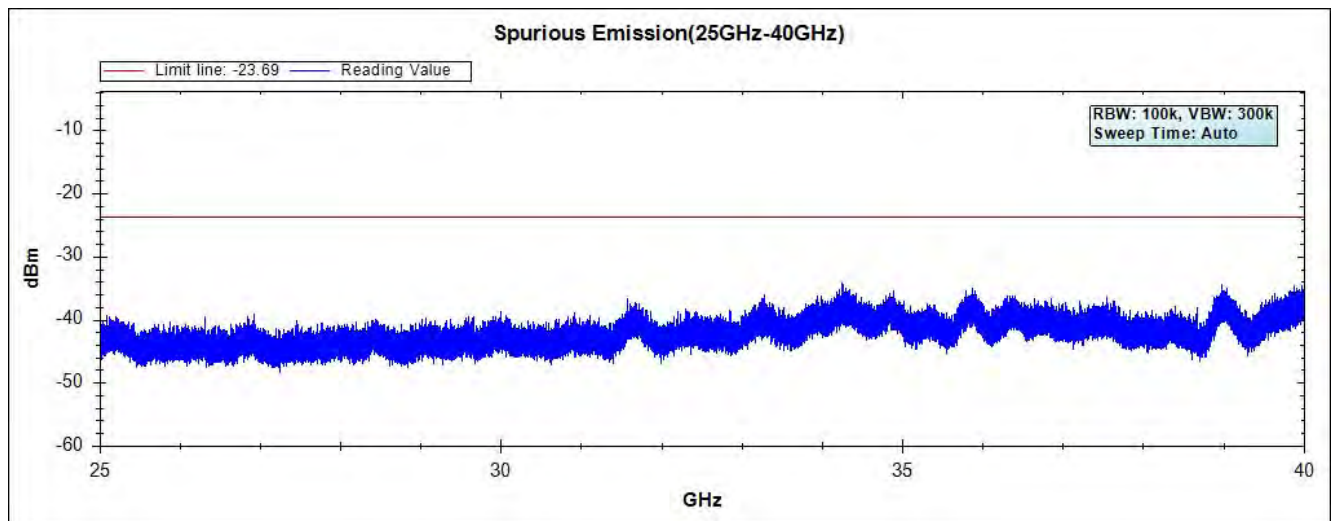
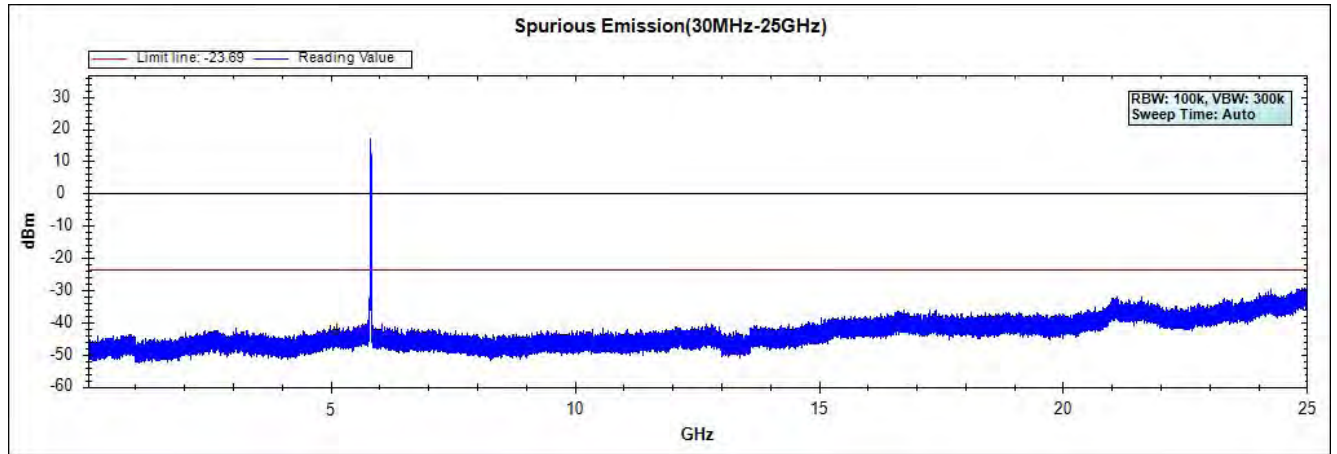


Product : 802.11 ac PCIe Module  
Test Item : RF Antenna Conducted Spurious  
Test Site : No.3 OATS  
Test Mode : Mode 18: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Sector Antenna)



**Channel 49 (5745MHz) 30MHz -40GHz-Chain A**

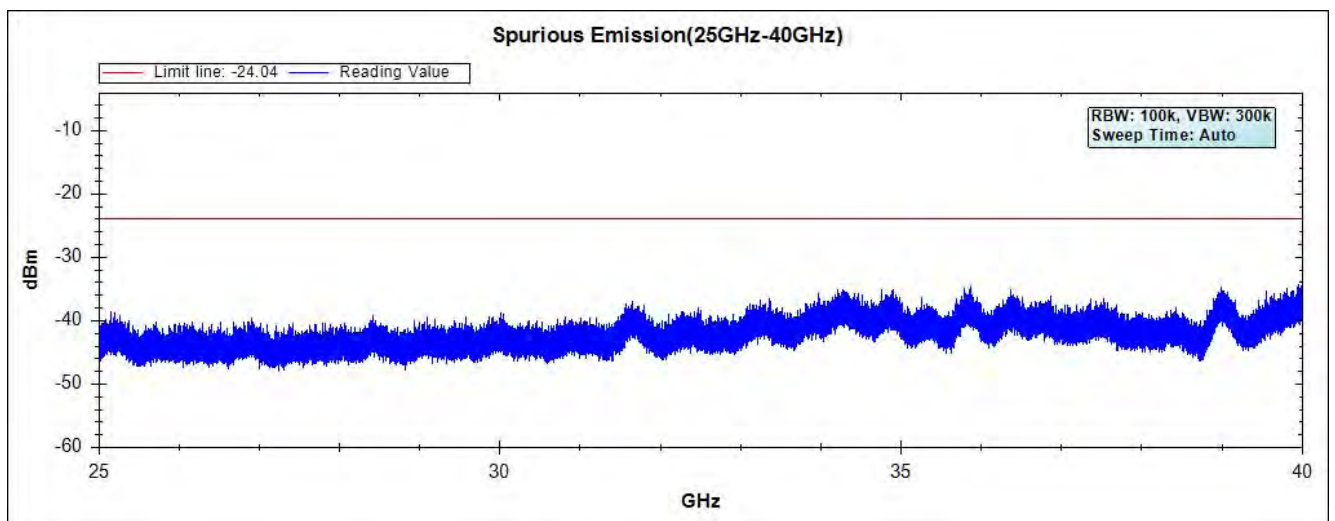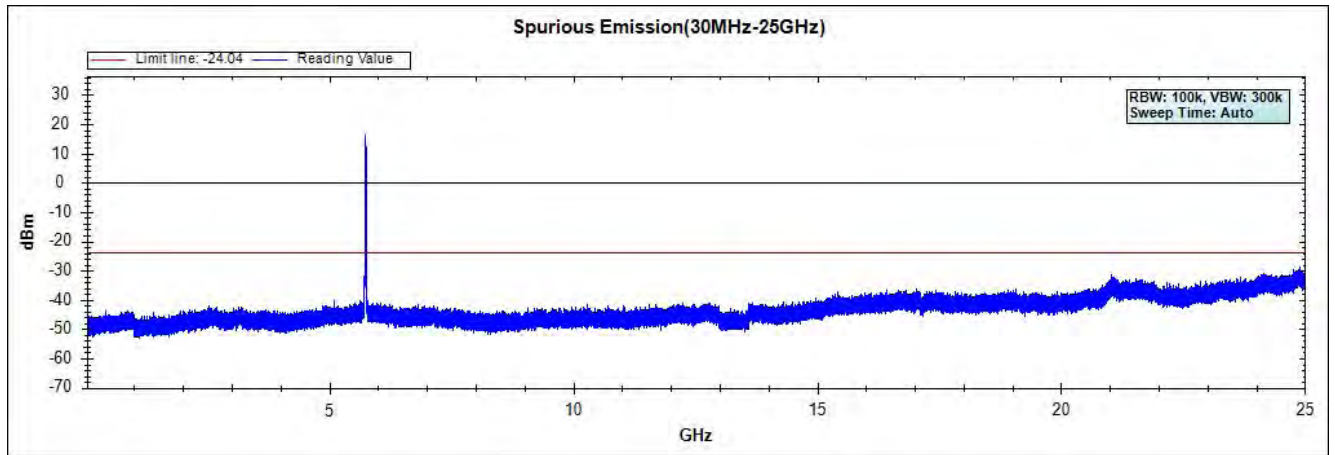



### Channel 157 (5785MHz) 30MHz -40GHz-Chain A

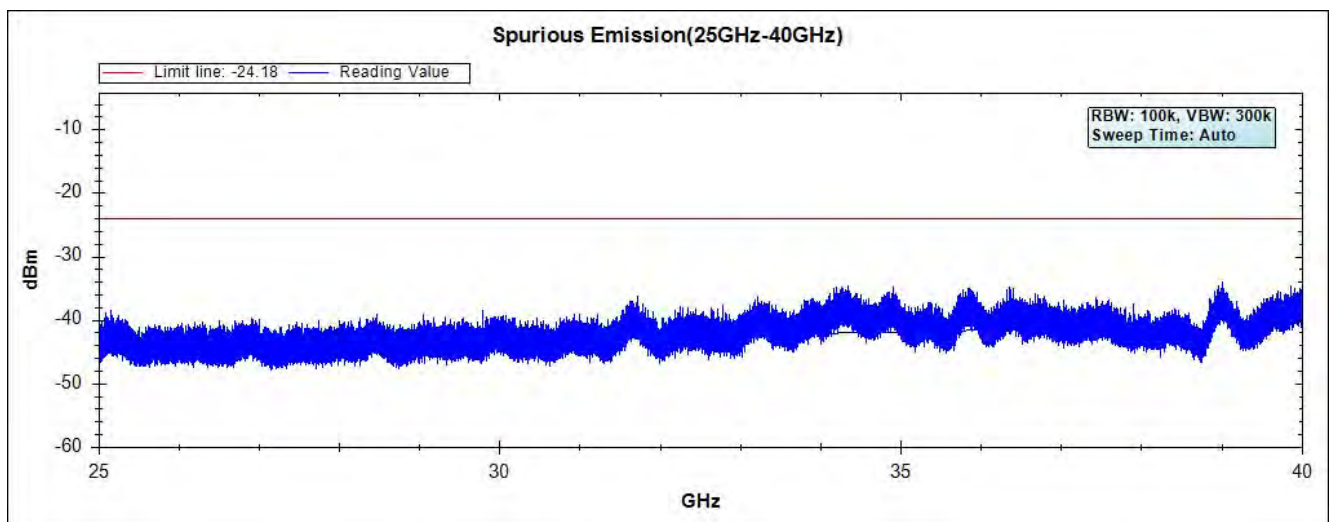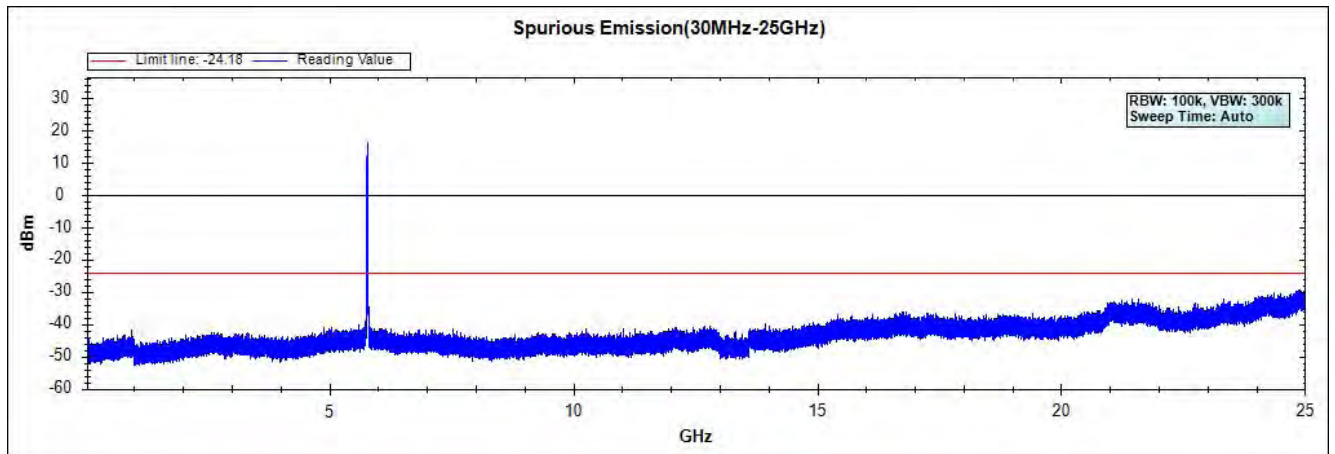



Channel 165 (5825MHz) 30MHz -40GHz-Chain A

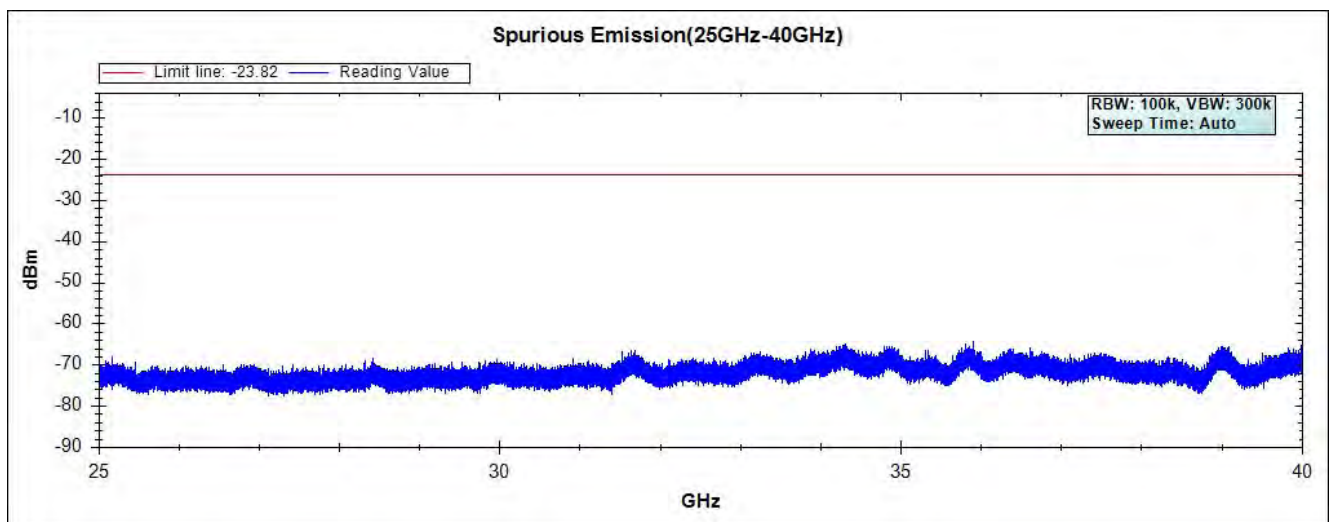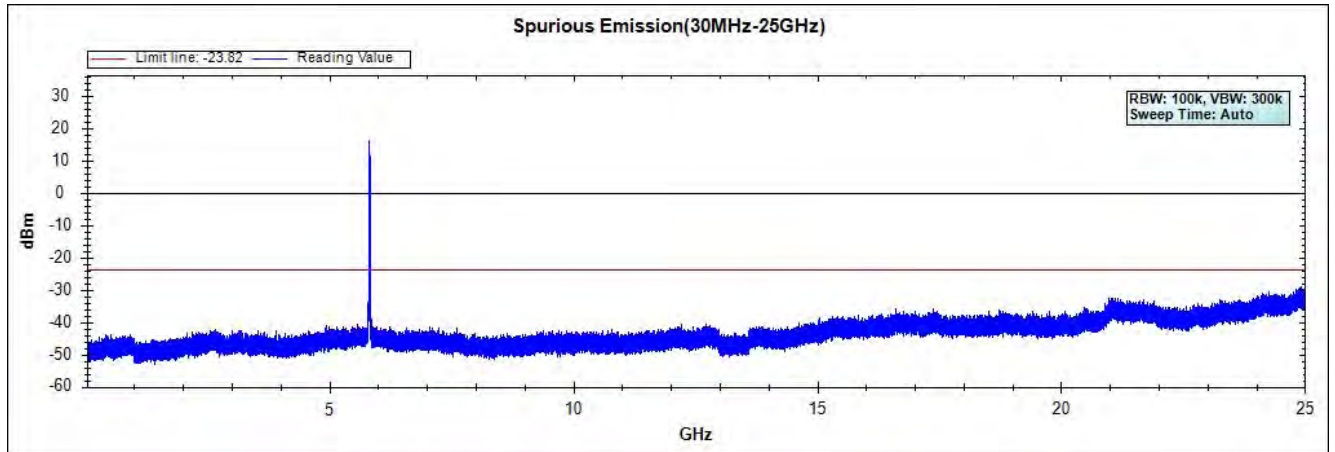



**Channel 49 (5745MHz) 30MHz -40GHz-Chain B**

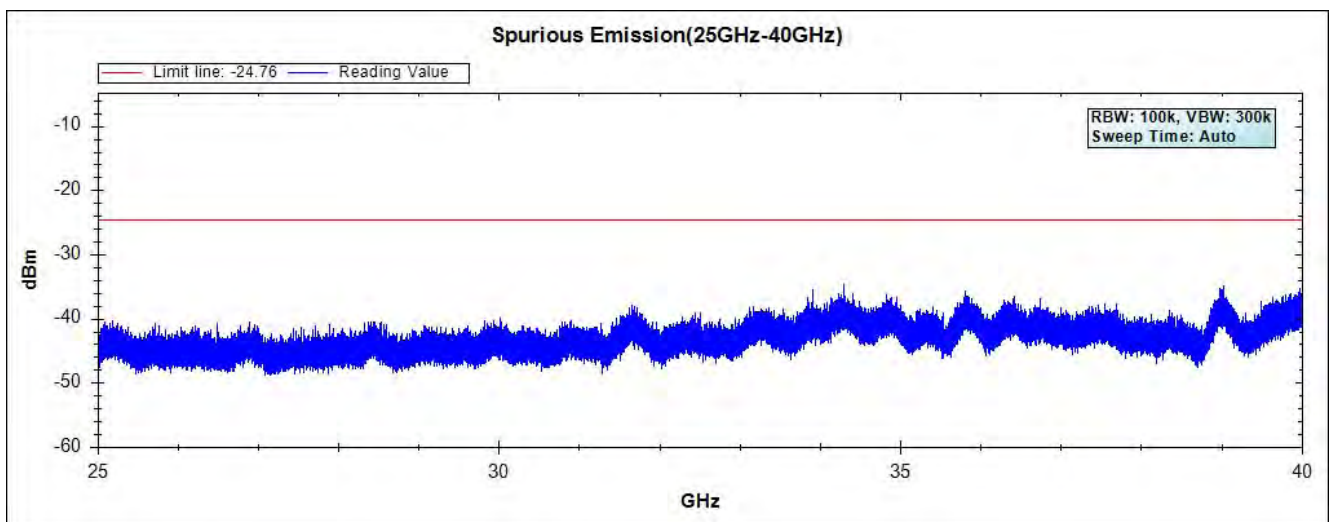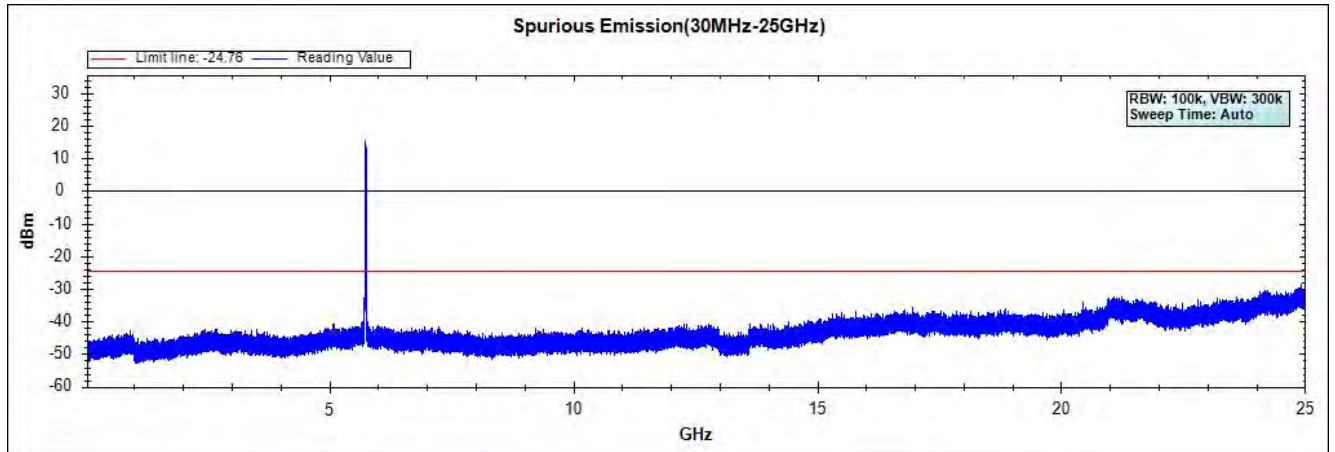

**Channel 157 (5785MHz) 30MHz -40GHz-Chain B**

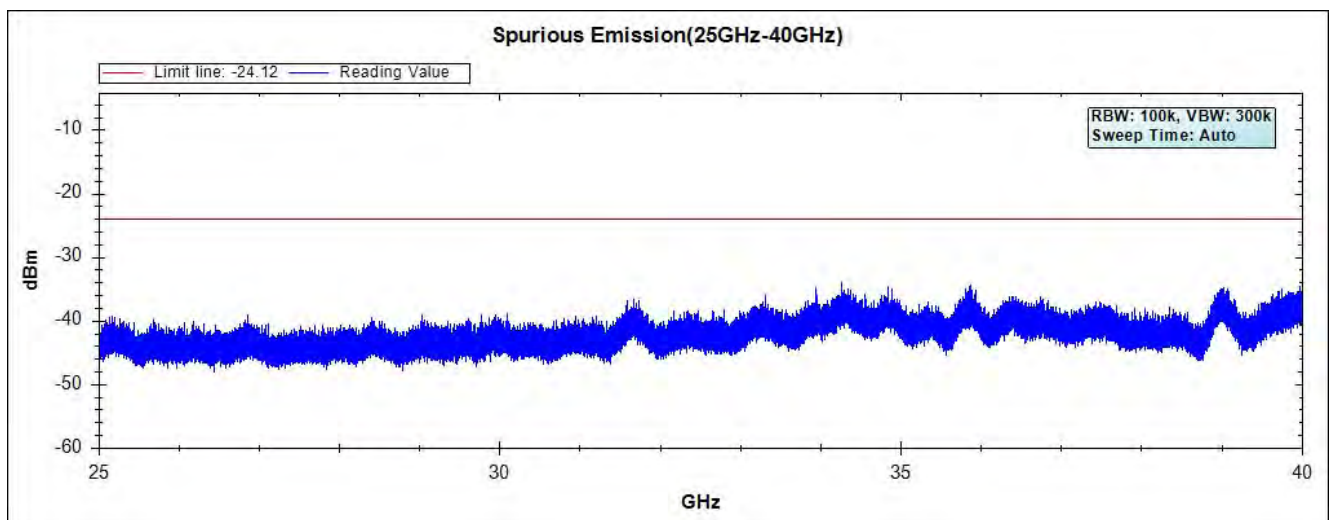
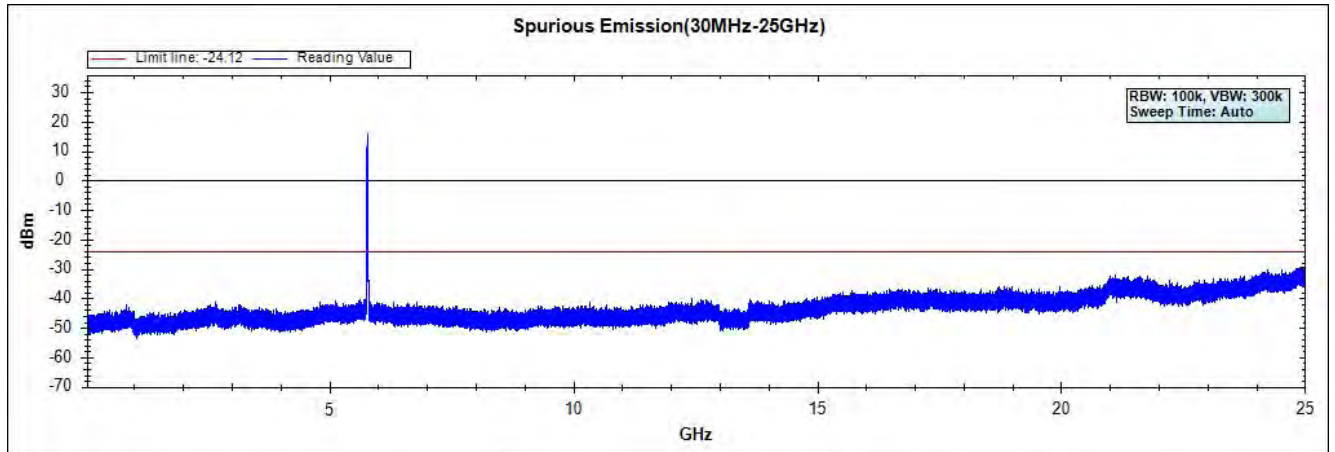


**Channel 165 (5825MHz) 30MHz -40GHz-Chain B**

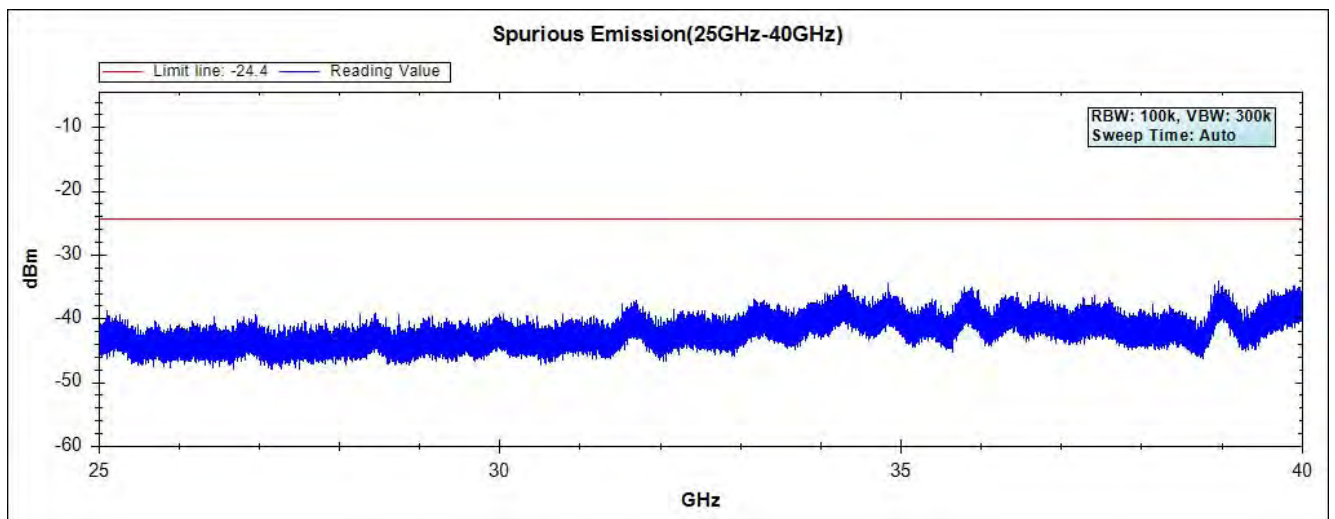
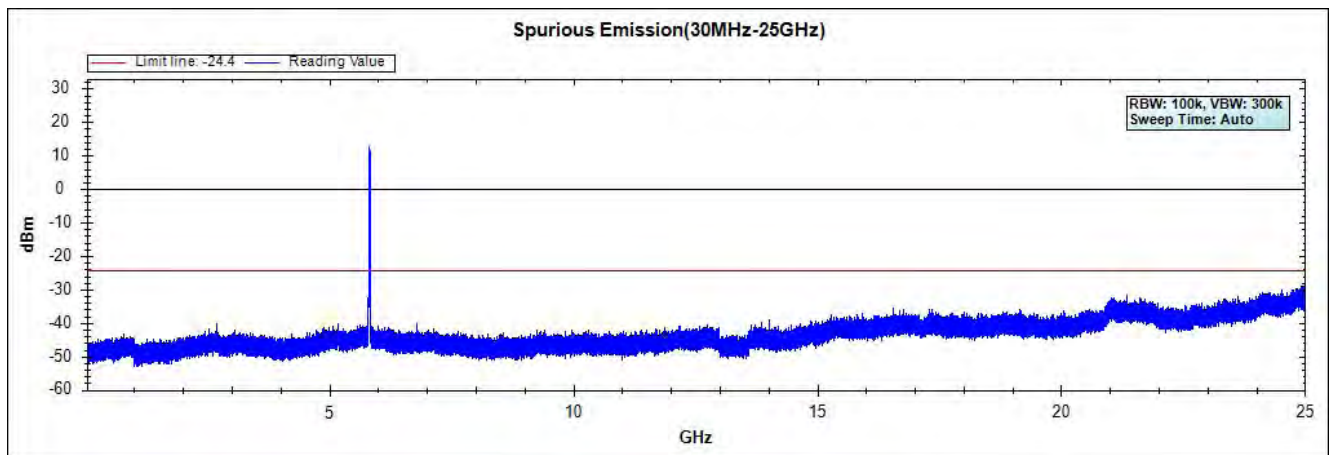


Product : 802.11 ac PCIe Module  
 Test Item : RF Antenna Conducted Spurious  
 Test Site : No.3 OATS  
 Test Mode : Mode 19: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Sector Antenna)



### Channel 151 (5755MHz) 30MHz -40GHz-Chain A

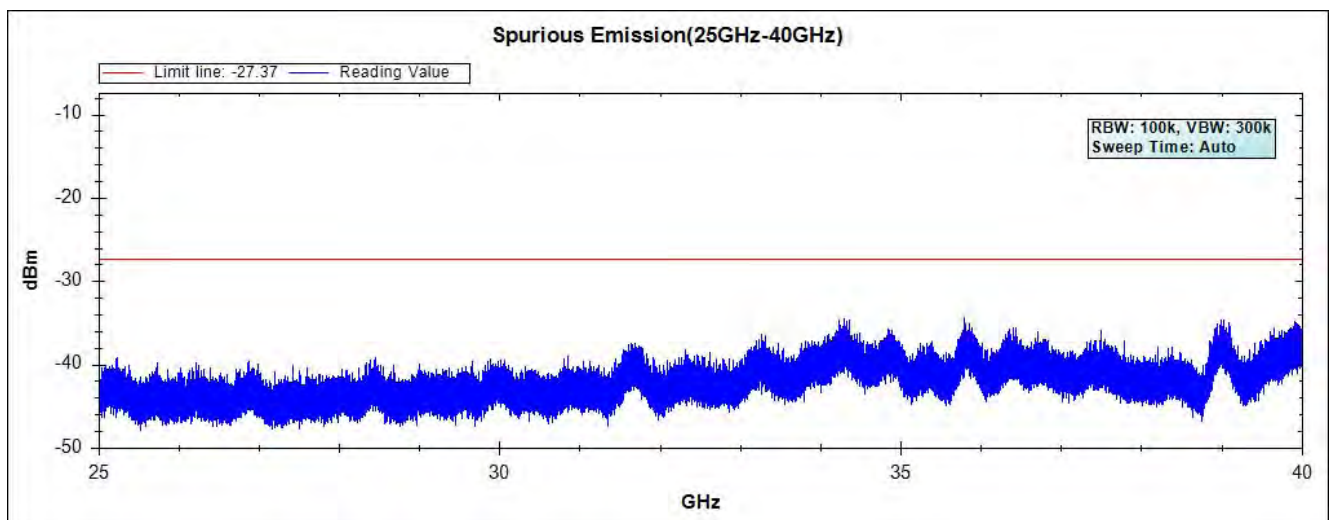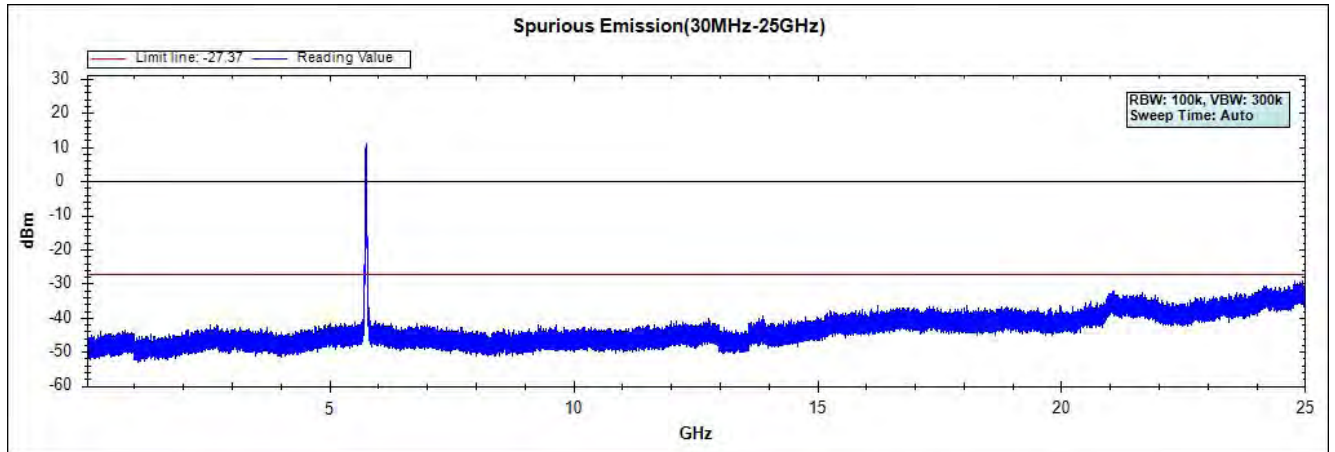



Channel 159 (5795MHz) 30MHz -40GHz-Chain A

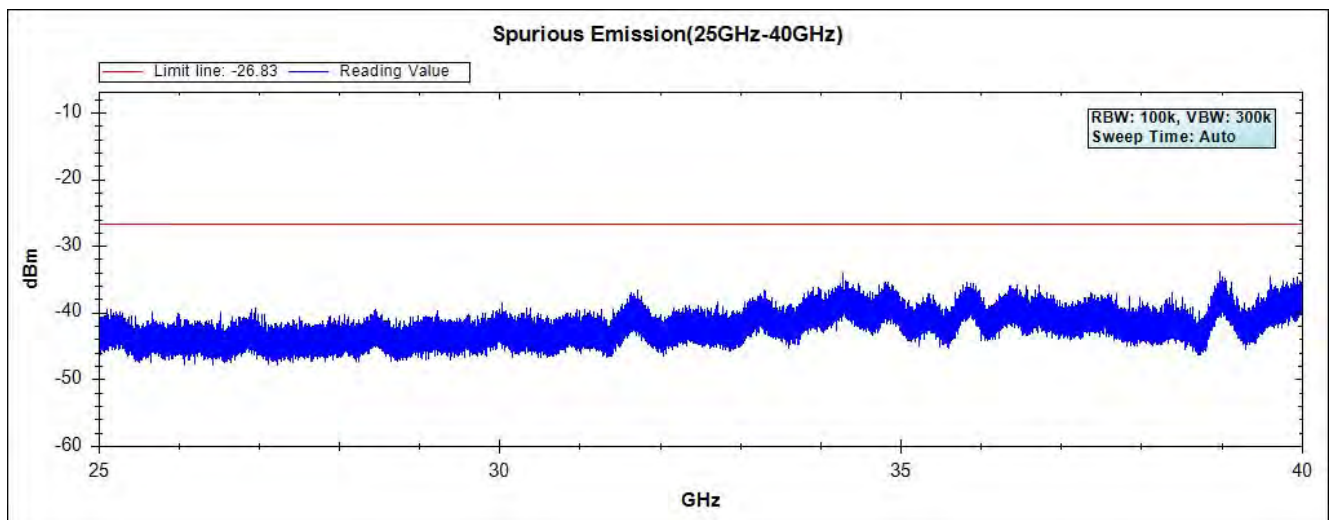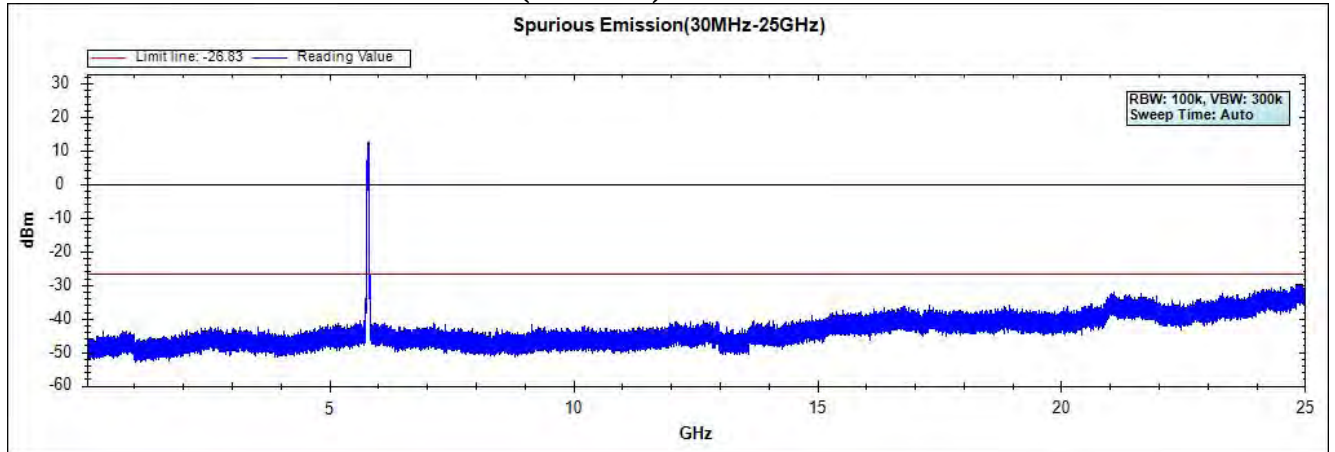

**Channel 151 (5755MHz) 30MHz -40GHz-Chain B**

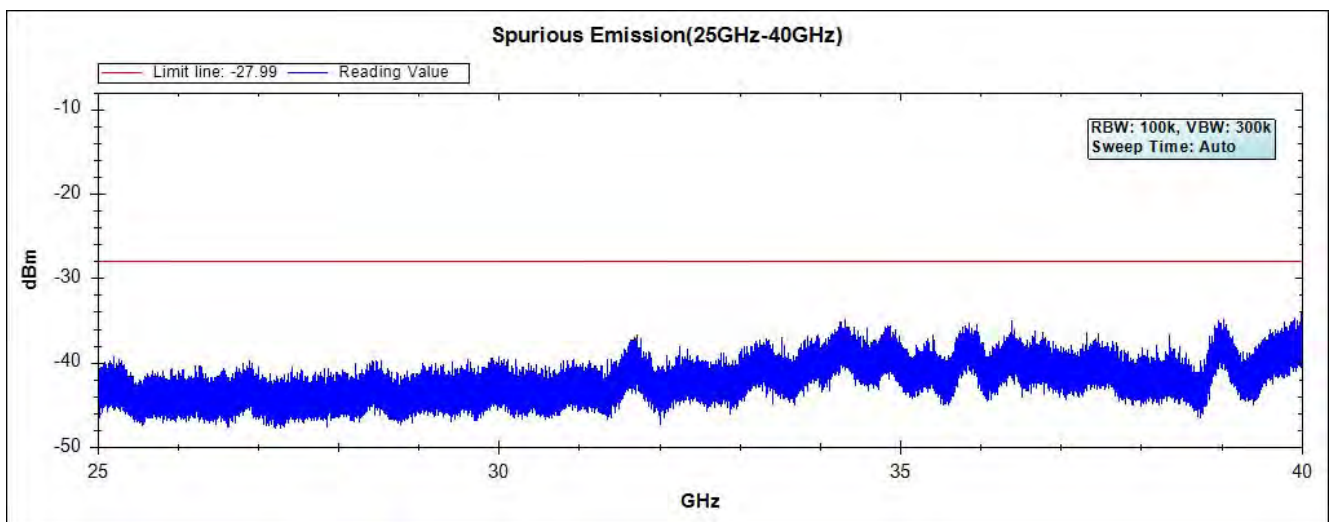
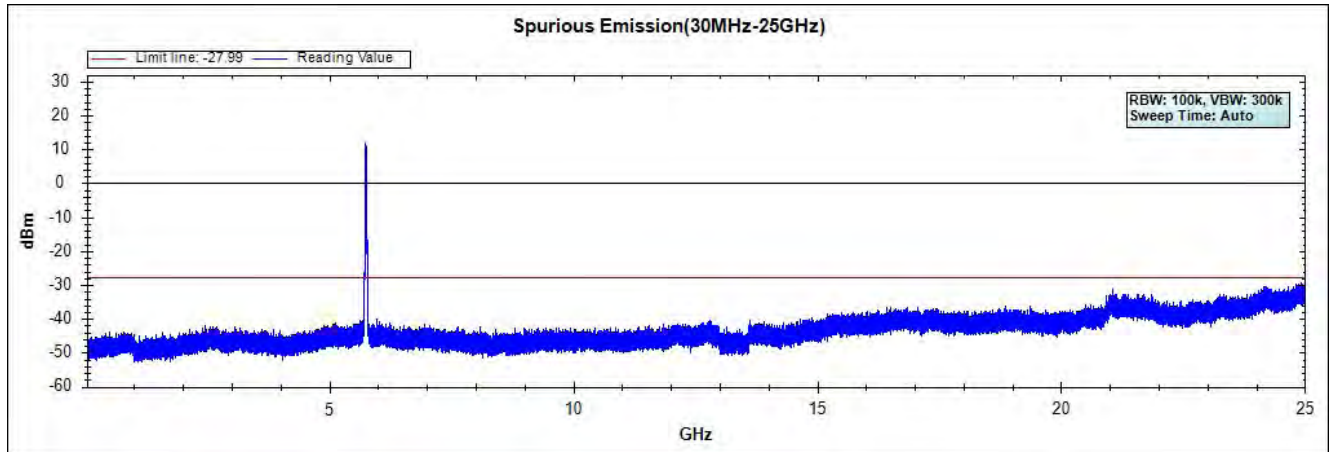


Channel 159 (5795MHz) 30MHz -40GHz-Chain B

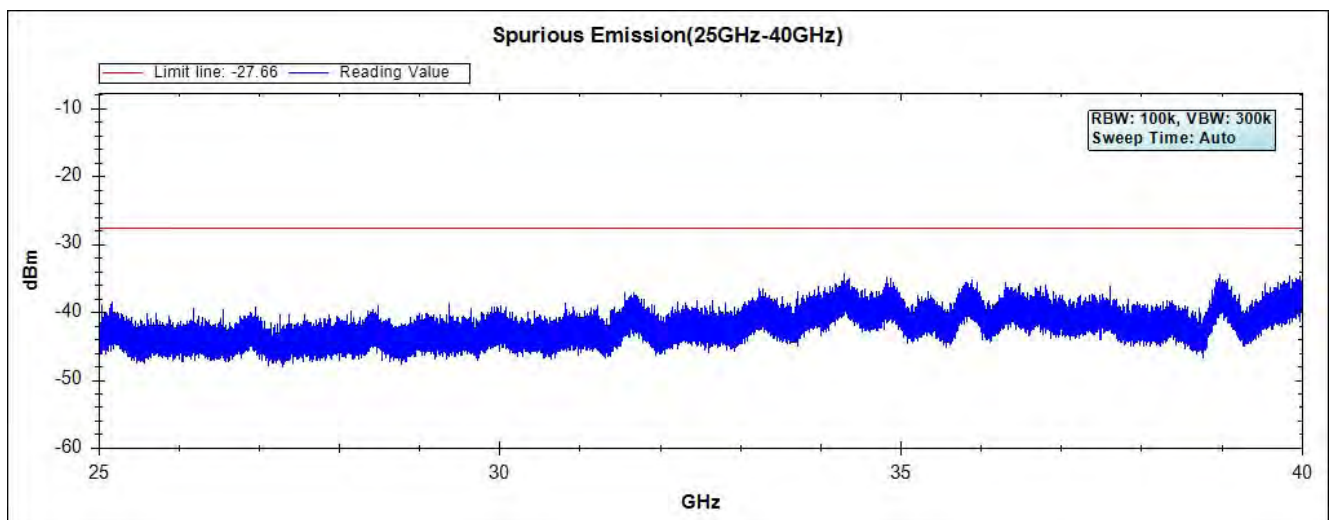
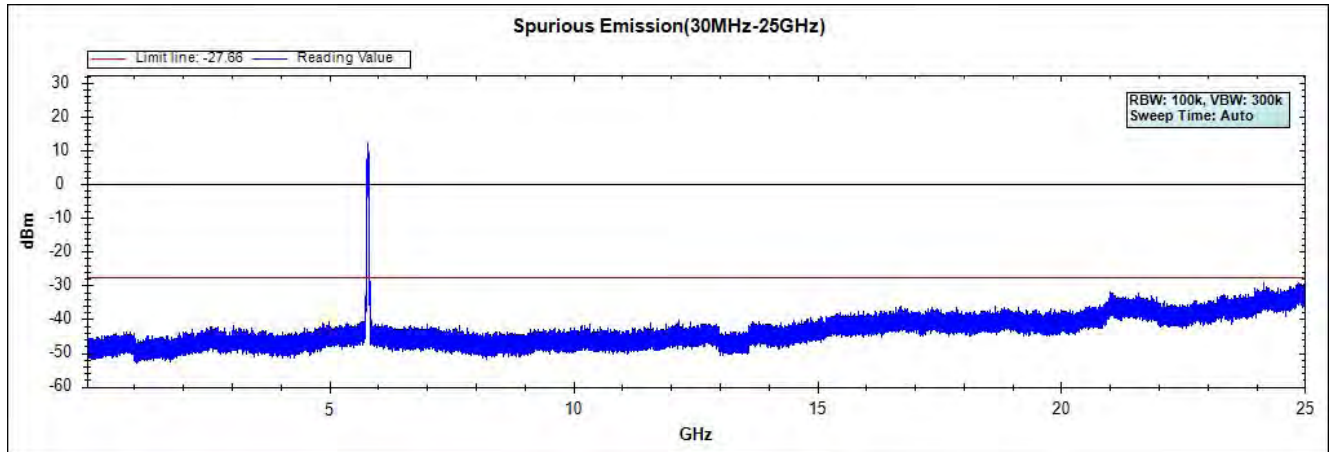


Product : 802.11 ac PCIe Module  
Test Item : RF Antenna Conducted Spurious  
Test Site : No.3 OATS  
Test Mode : Mode 20: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Sector Antenna)

**Channel 1 (5780MHz) 30MHz -40GHz- Chaia A**

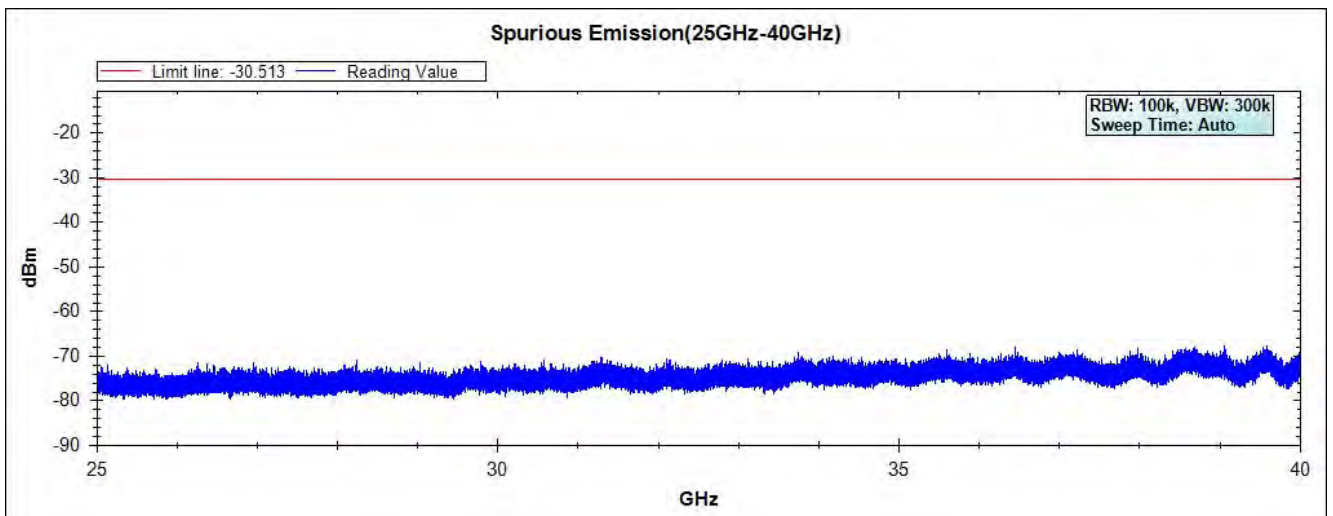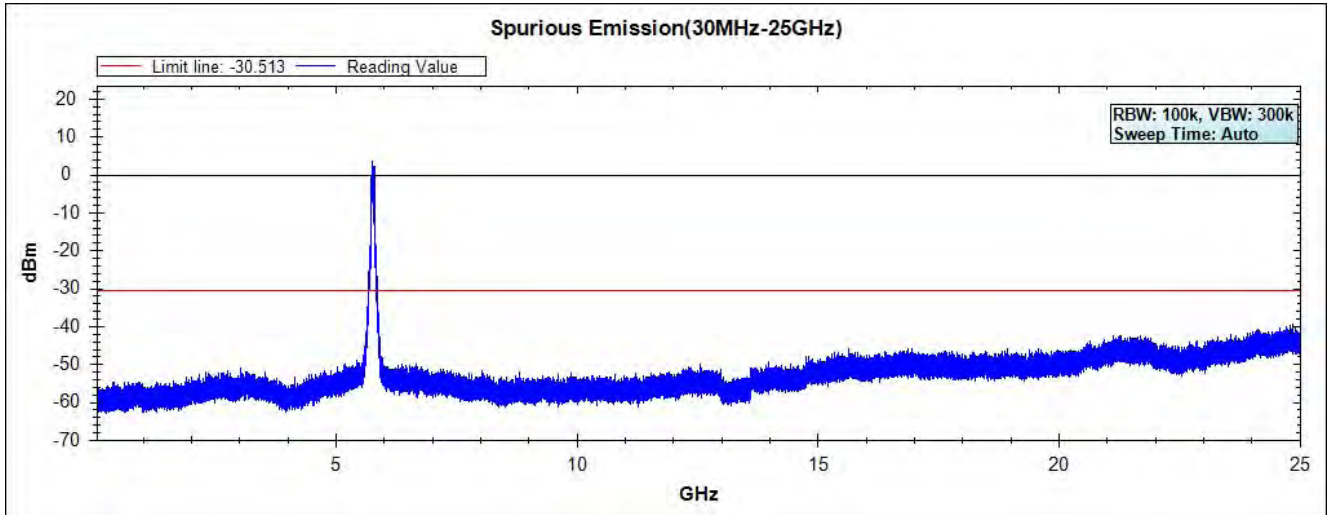

### Channel 1 (5780MHz) 30MHz -40GHz- Chaia B

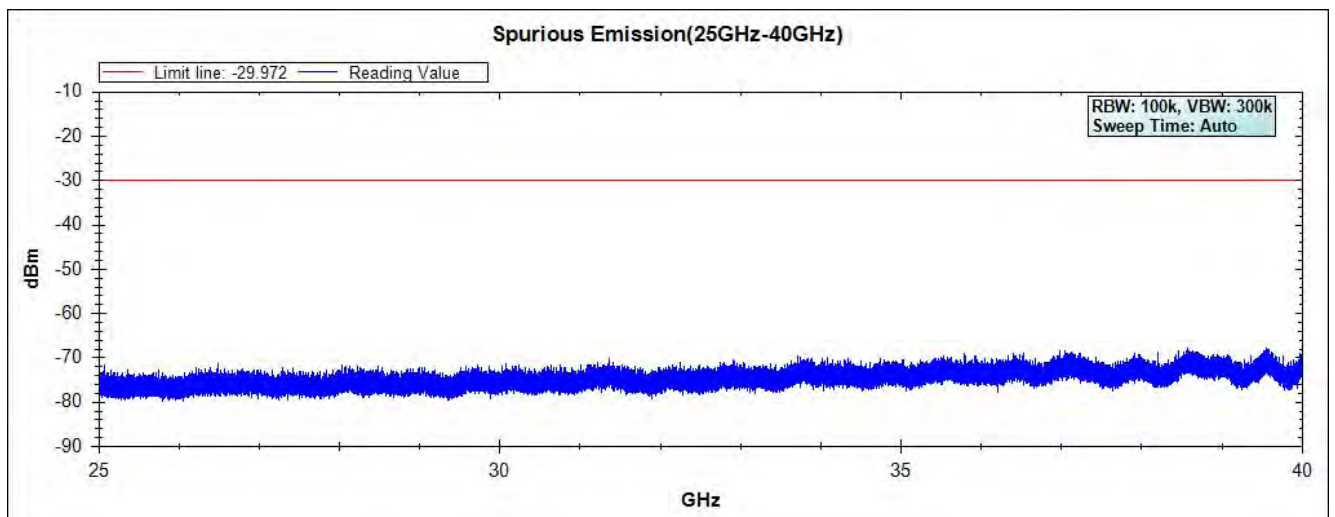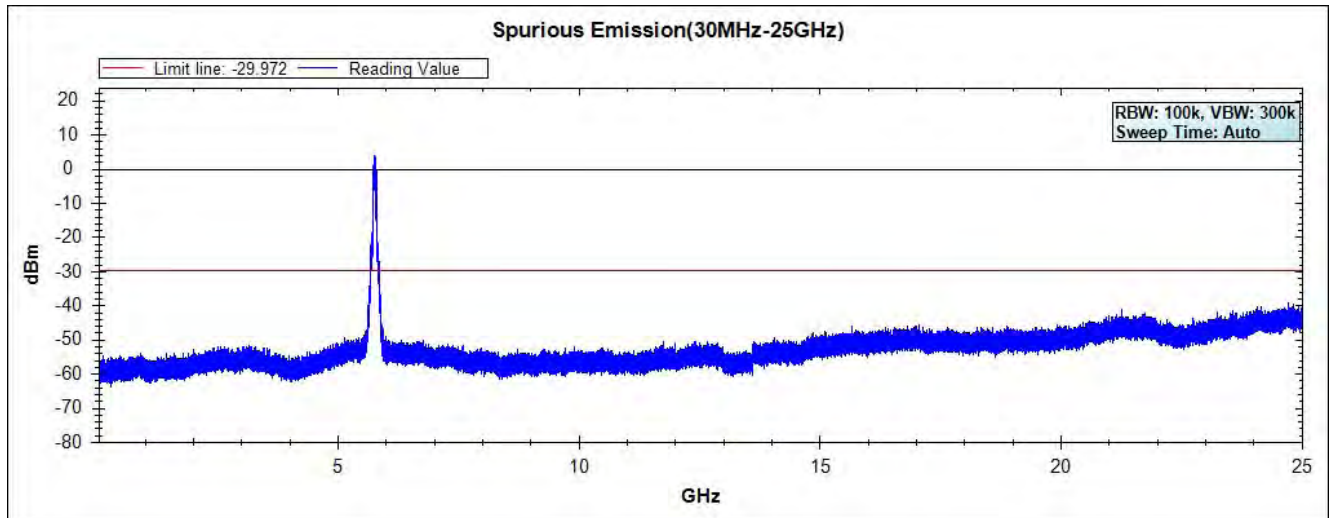

## 6. Band Edge

### 6.1. Test Equipment

#### RF Conducted Measurement

The following test equipments are used during the band edge tests:

|   | Equipment         | Manufacturer | Model No./Serial No. | Last Cal.  |
|---|-------------------|--------------|----------------------|------------|
|   | Spectrum Analyzer | R&S          | FSP40 / 100170       | Jun, 2014  |
|   | Spectrum Analyzer | Agilent      | E4407B / US39440758  | Jun, 2014  |
| X | Spectrum Analyzer | Agilent      | N9010A / MY48030495  | Apr., 2015 |

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

#### RF Radiated Measurement:


The following test equipments are used during the band edge tests:

| Test Site |   | Equipment         | Manufacturer | Model No./Serial No.        | Last Cal. |
|-----------|---|-------------------|--------------|-----------------------------|-----------|
| ☒ CB # 8  | X | Spectrum Analyzer | R&S          | FSP40/ 100339               | Oct, 2014 |
|           | X | Horn Antenna      | ETS-Lindgren | 3117/ 35205                 | Mar, 2015 |
|           | X | Horn Antenna      | Schwarzbeck  | BBHA9170/209                | Jan, 2015 |
|           | X | Horn Antenna      | TRC          | AH-0801/95051               | Aug, 2014 |
|           | X | Pre-Amplifier     | EMCI         | EMC012630SE/980210          | Jan, 2015 |
|           | X | Pre-Amplifier     | MITEQ        | JS41-001040000-58-5P/153945 | Jul, 2014 |
|           | X | Pre-Amplifier     | NARDA        | DBL-1840N506/013            | Jul, 2014 |


- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
  2. The test instruments marked with “X” are used to measure the final test results.

## 6.2. Test Setup

### RF Conducted Measurement

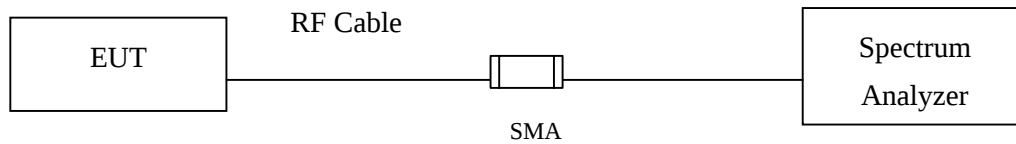

### RF Radiated Measurement:

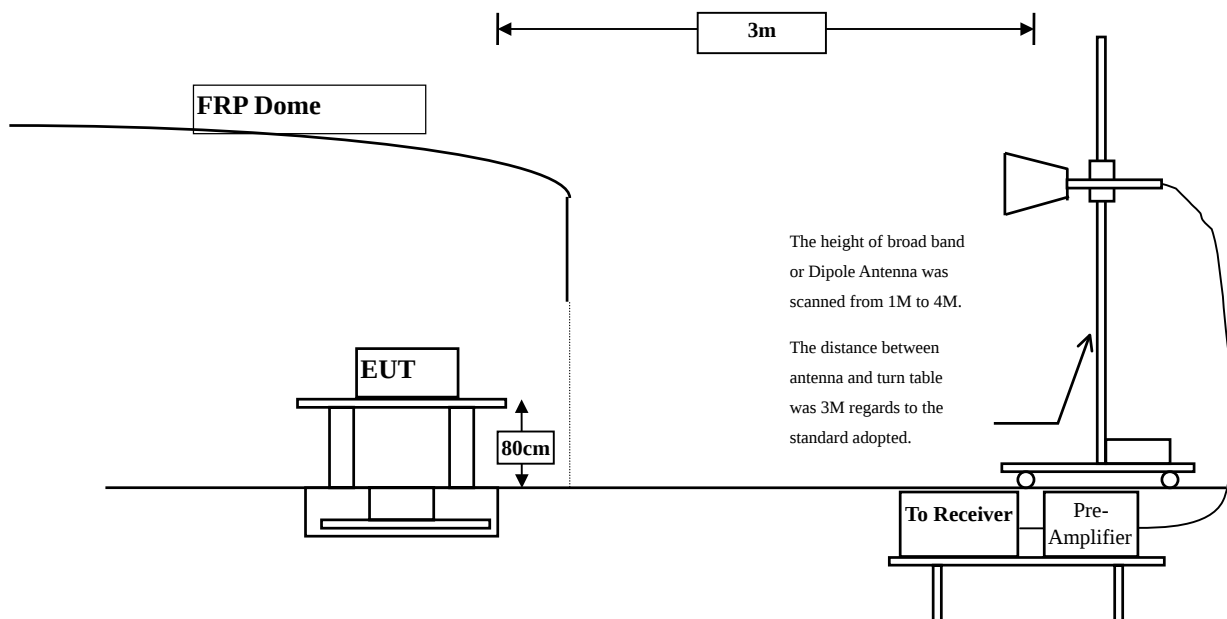

## 6.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 30dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

#### **6.4. Test Procedure**

The EUT was setup according to ANSI C63.10, 2009 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2009 on radiated measurement.

#### **6.5. Uncertainty**

± 3.9 dB above 1GHz


± 3.8 dB below 1GHz

## 6.6. Test Result of Band Edge

Product : 802.11 ac PCIe Module  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit - 802.11a\_6Mbps(Dipole Antenna)

### Chain A


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5745                    | 48.16                              | >30                    | PASS   |

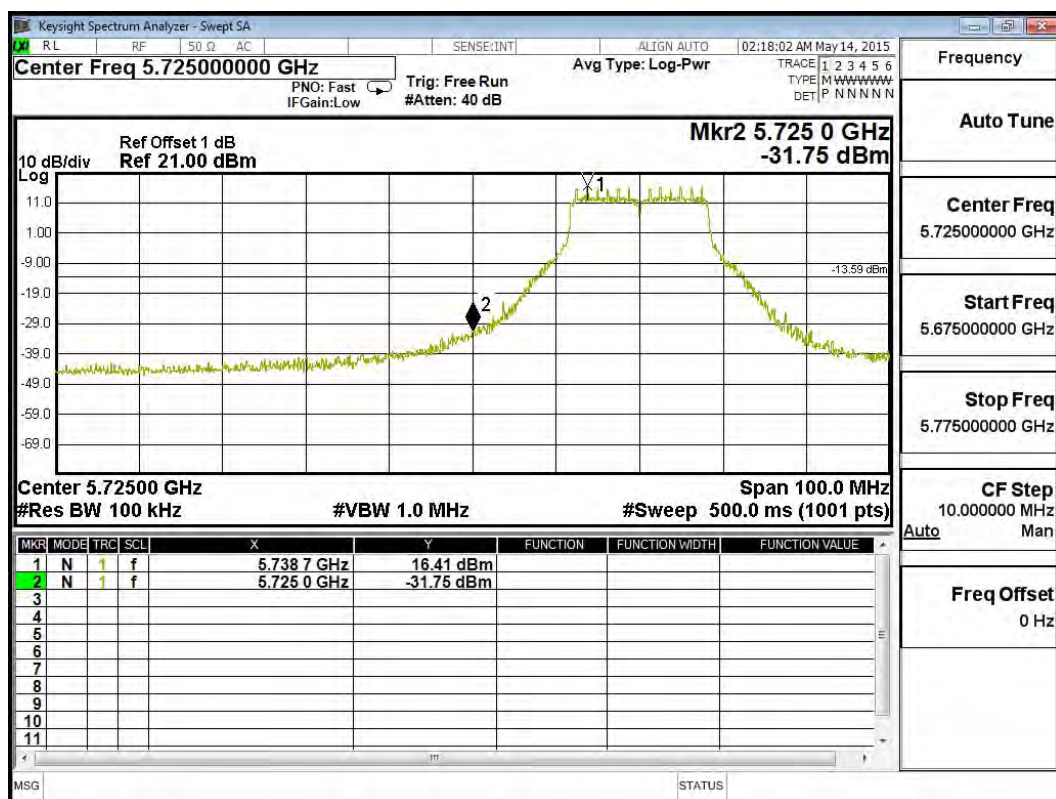

Product : 802.11 ac PCIe Module  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit - 802.11a\_6Mbps(Dipole Antenna)

### Chain B


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5745                    | 47.99                              | >30                    | PASS   |

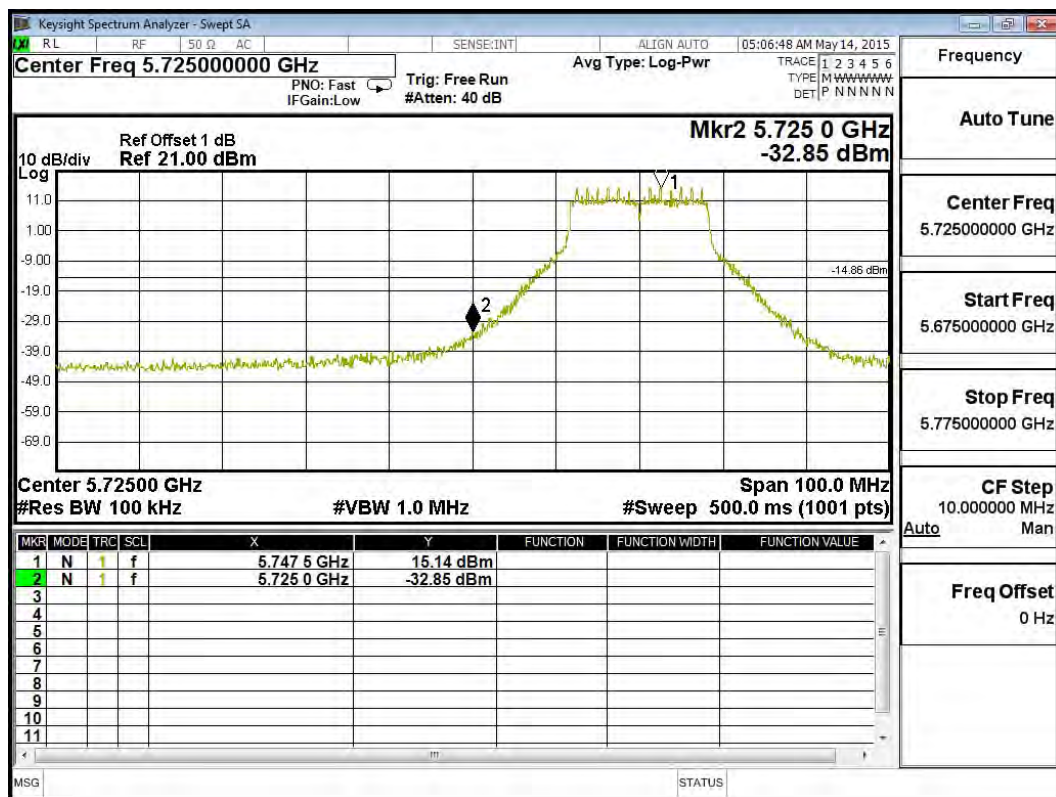

Product : 802.11 ac PCIe Module  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit - 802.11a\_6Mbps(Dipole Antenna)

### Chain A


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5825                    | 54.82                              | >30                    | PASS   |

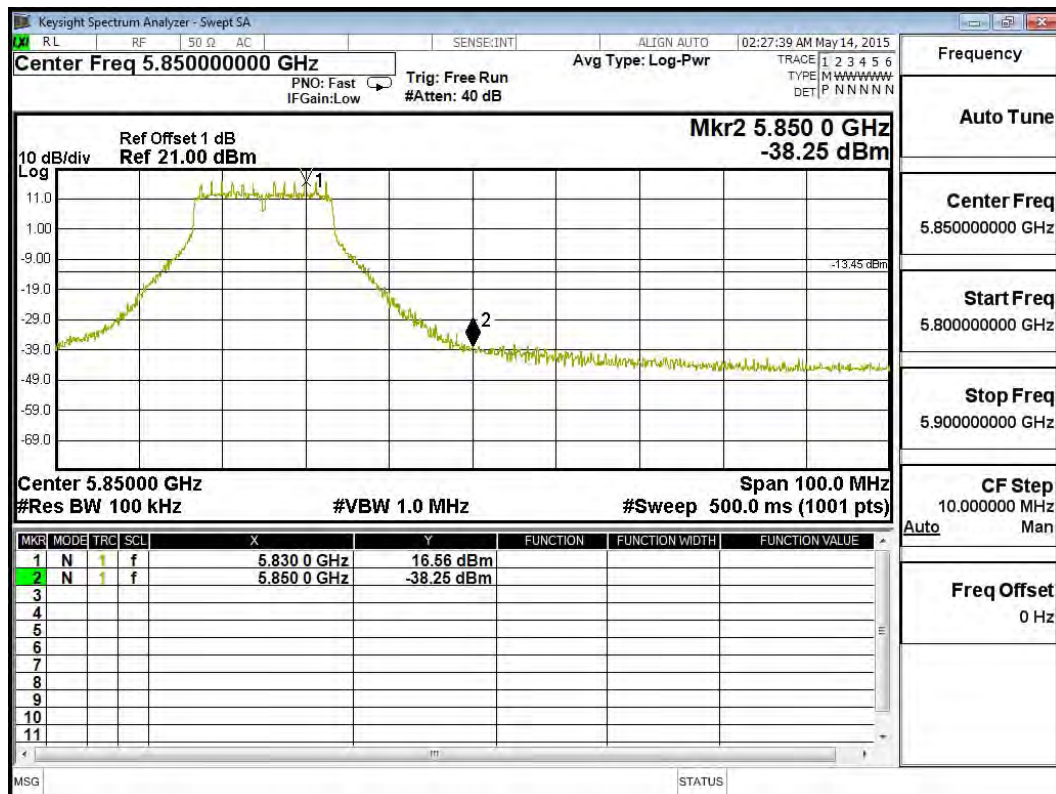

Product : 802.11 ac PCIe Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 802.11a\_6Mbps(Dipole Antenna)

### Chain B


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5825                    | 55.01                              | >30                    | PASS   |

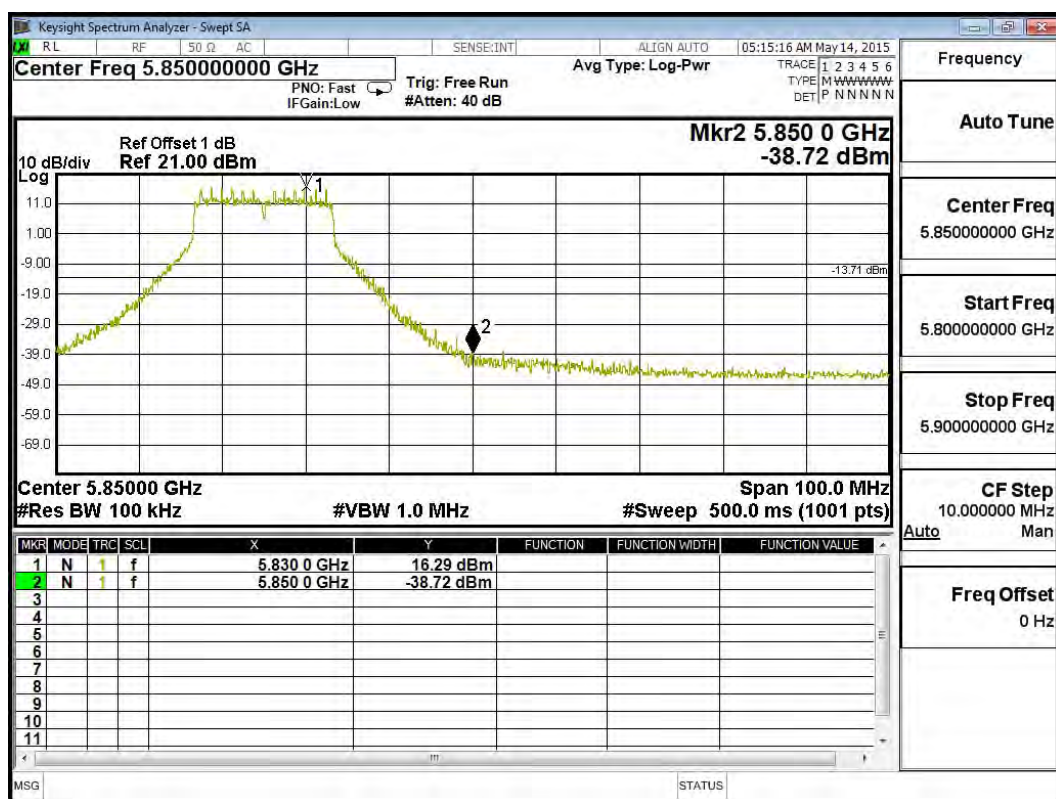

Product : 802.11 ac PCIe Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Dipole Antenna)

### Chain A


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5745                    | 47.40                              | >30                    | PASS   |

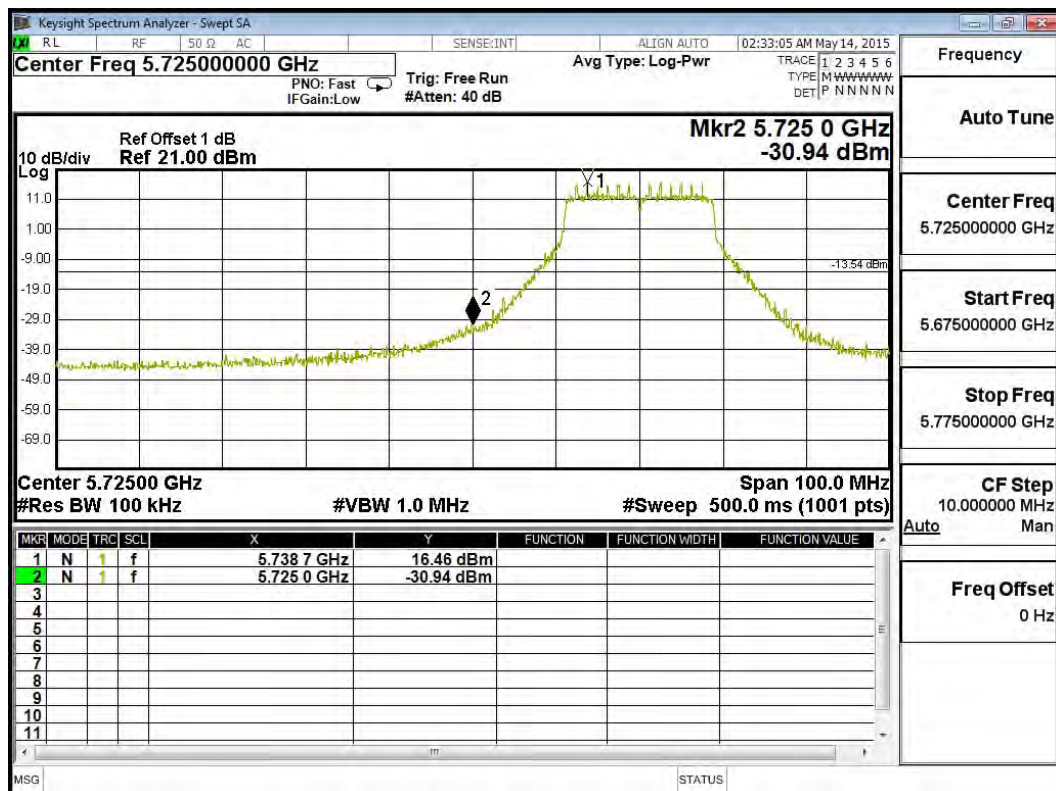

Product : 802.11 ac PCIe Module  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 2: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Dipole Antenna)

### Chain B


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5745                    | 44.88                              | >30                    | PASS   |

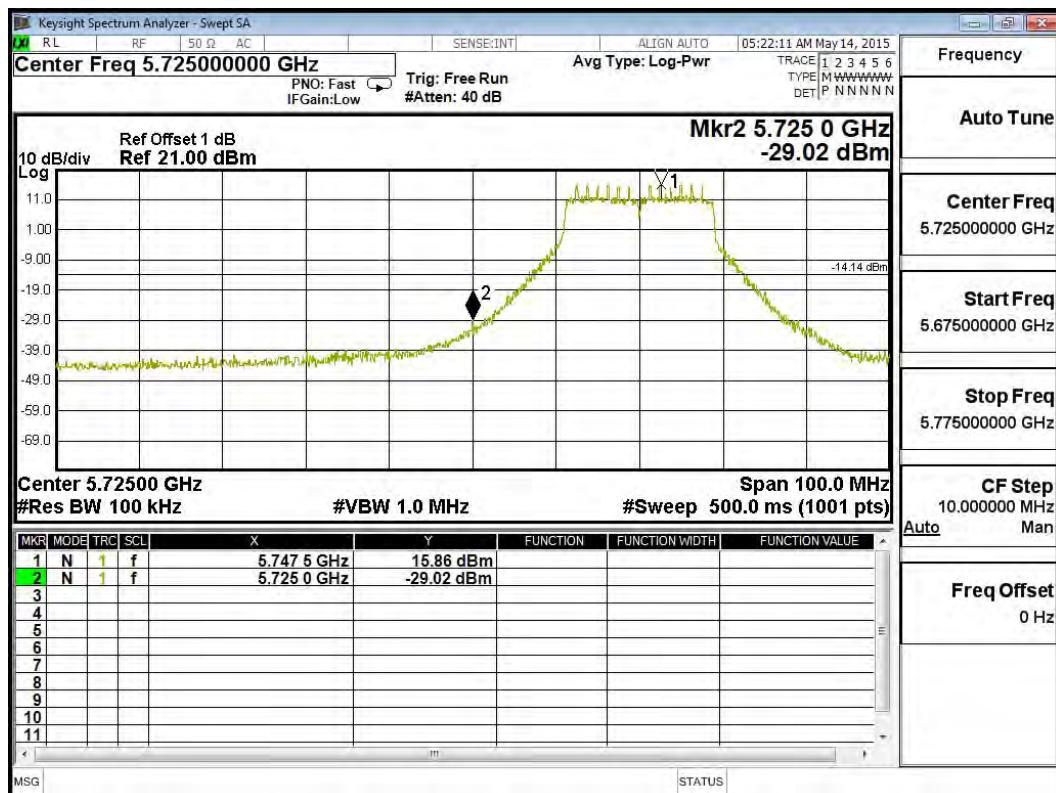

Product : 802.11 ac PCIe Module  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 2: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Dipole Antenna)

### Chain A


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5825                    | 51.61                              | >30                    | PASS   |

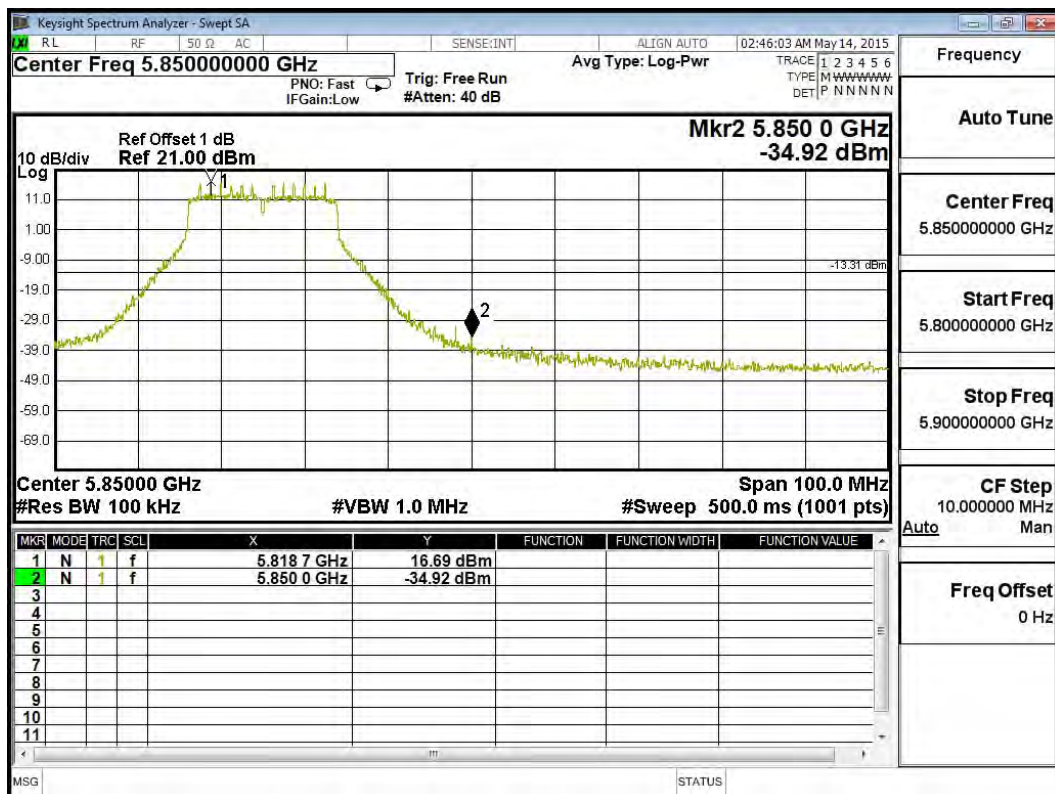

Product : 802.11 ac PCIE Module  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 2: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)(Dipole Antenna)

### Chain B


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5825                    | 53.09                              | >30                    | PASS   |

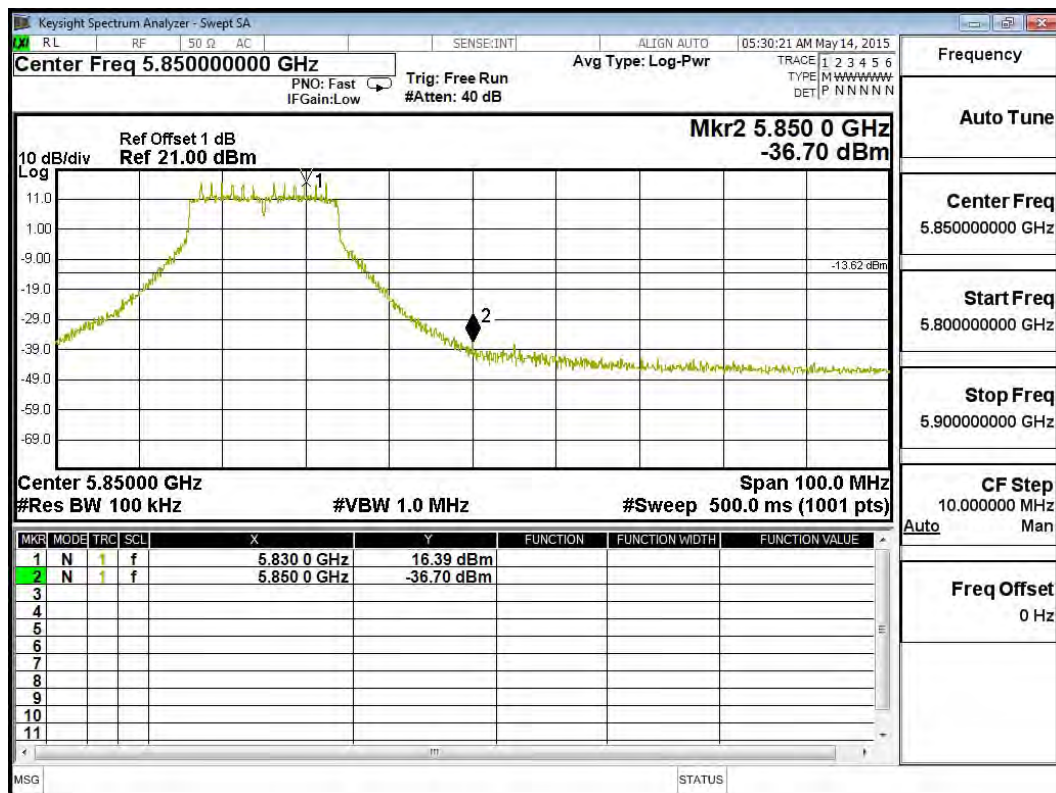

Product : 802.11 ac PCIe Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Dipole Antenna)

### Chain A


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5755                    | 38.23                              | >30                    | PASS   |

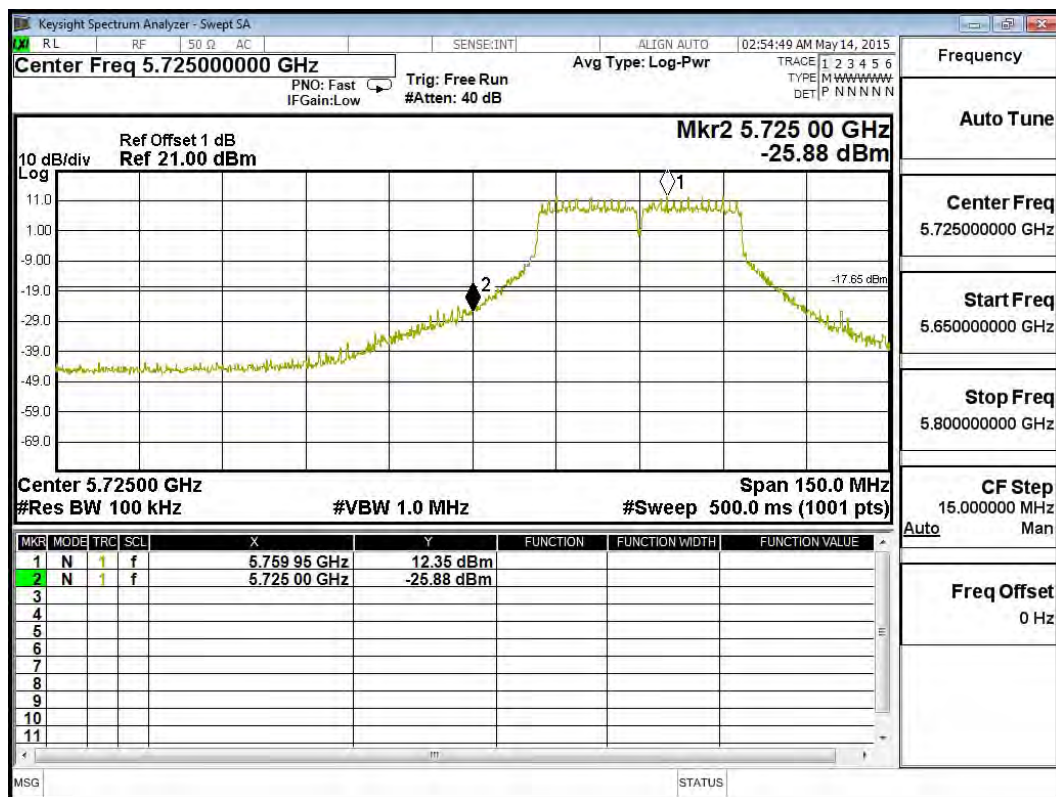

Product : 802.11 ac PCIe Module  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 3: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Dipole Antenna)

### Chain B


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5755                    | 37.38                              | >30                    | PASS   |

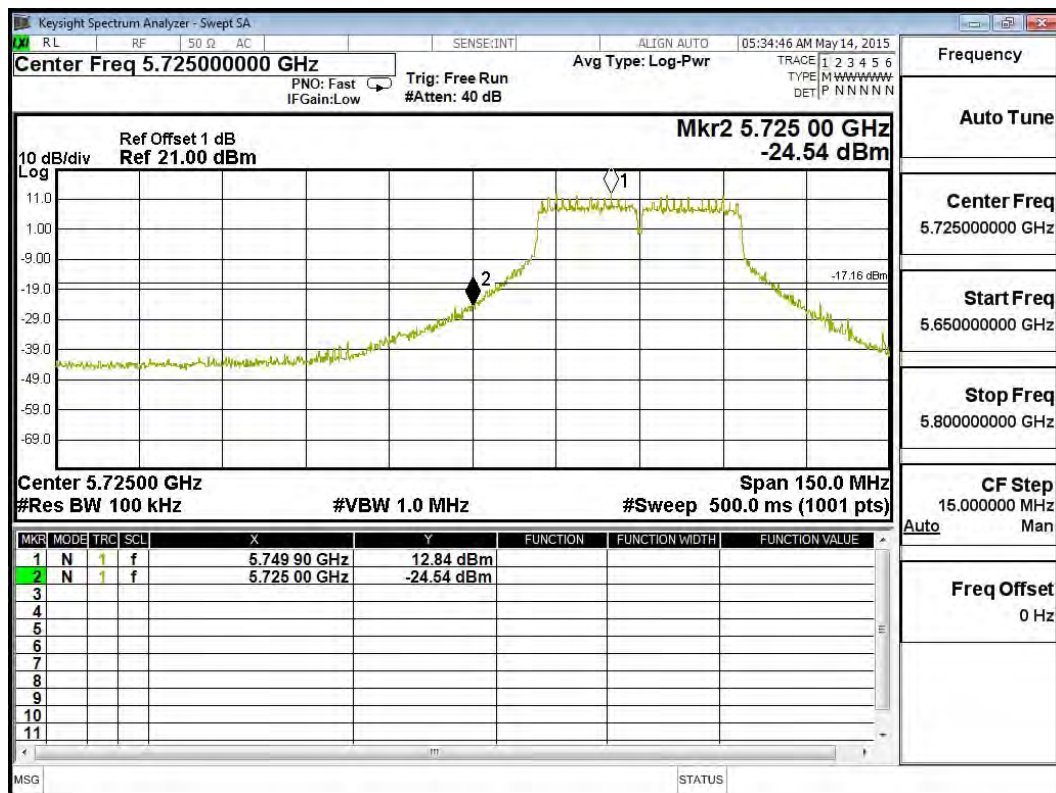

Product : 802.11 ac PCIe Module  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 3: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Dipole Antenna)

### Chain A


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5795                    | 50.53                              | >30                    | PASS   |

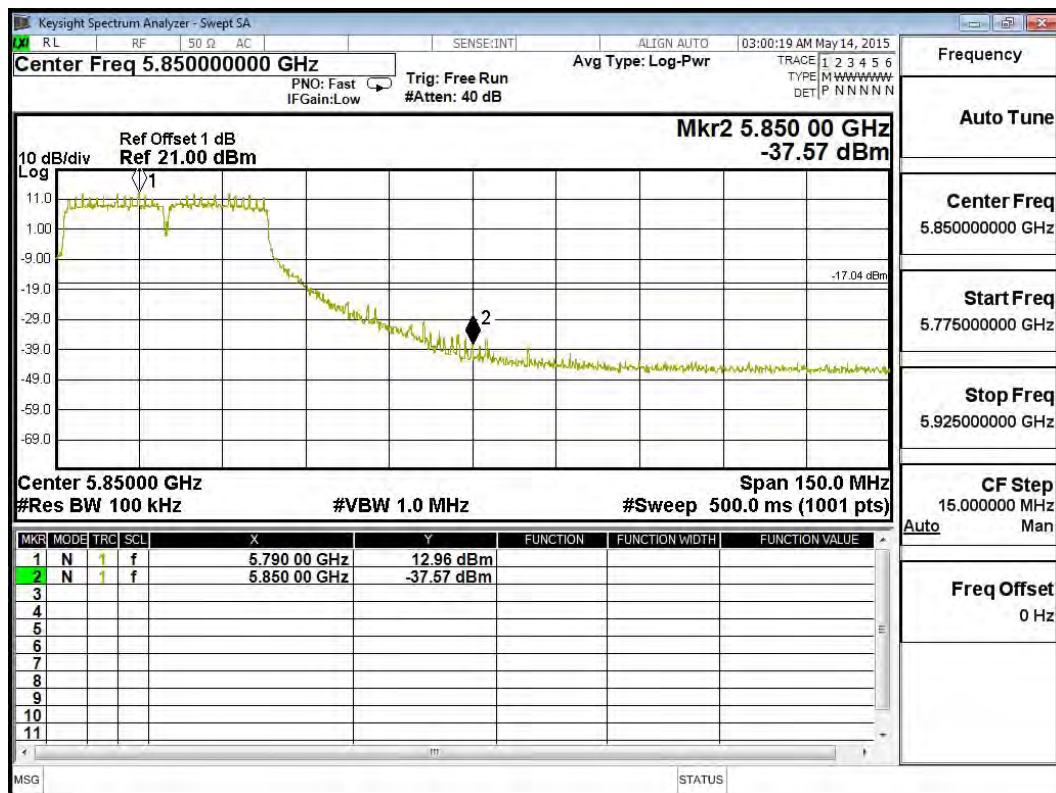

Product : 802.11 ac PCIe Module  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 3: Transmit - 802.11n-40BW\_30Mbps(5G Band)(Dipole Antenna)

### Chain B


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5795                    | 54.31                              | >30                    | PASS   |

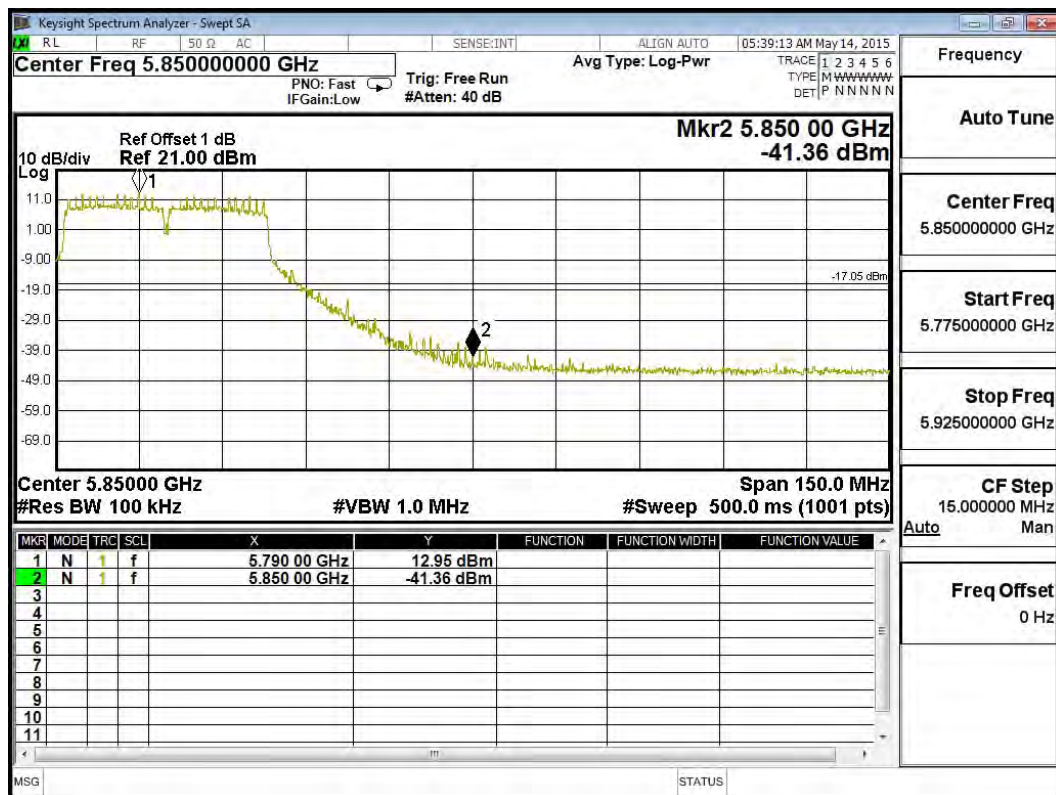

Product : 802.11 ac PCIe Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Dipole Antenna)

### Chain A

| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5780                    | 33.54                              | >30                    | PASS   |

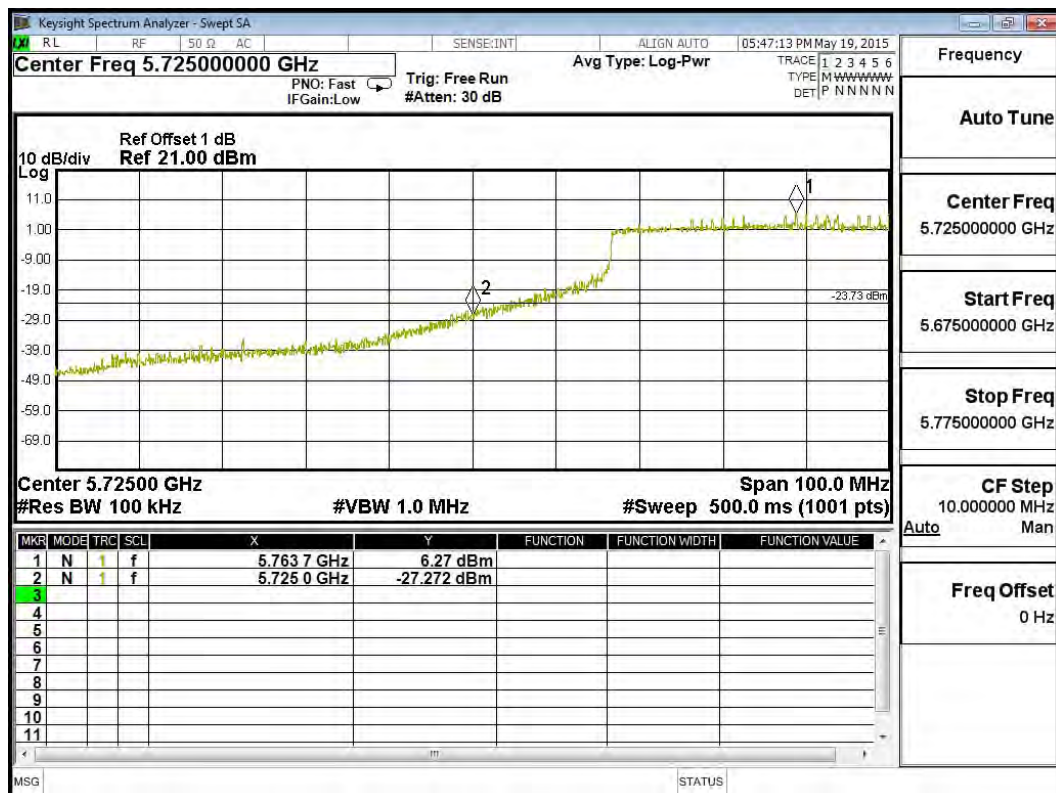

Product : 802.11 ac PCIe Module  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 4: Transmit - 802.11ac-80BW\_65Mbps(5G Band)(Dipole Antenna)

### Chain B

| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5780                    | 30.37                              | >30                    | PASS   |

