

FCC Part 15 Subpart E Test Report

for
Proxim Corporation
on the
Tsunami Subscriber Unit
Model: 40100-XXX
FCC ID: HZB-US58-S60

Job # 3008928
Date of Test: September 20 to 23, 2001


Total No of Pages contained in this Report: 51

Test Report #: 30089281
Date of Report: September 25, 2001
Revised: February 26, 2002
Revised: April 20, 2002



NVLAP Laboratory Code 200201-0



	Xi-Ming Yang, Test Engineer
	David Chernomordik, EMC Technical Manager

Review Date: 4/24/02

This report shall not be reproduced except in full, without written approval of Intertek Testing Services.
This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.
The results contained in this report were derived from measurements performed on the identified test samples. Any implied performance of other samples on this report is dependent on the representative of the samples tested.

Intertek Testing Services NA, Inc.

1365 Adams Court, Menlo Park, CA 94025
Telephone 650-463-2900 Fax 650-463-2910 Home Page www.etlsemko.com

TABLE OF CONTENTS

1.0	Summary of Tests	3
2.0	General Description.....	4
2.1	Product Description	4
2.2	Related Submittal(s) Grants	5
2.3	Test Methodology	5
2.4	Test Facility	5
3.0	System Test Configuration.....	6
3.1	Support Equipment and description	6
3.2	Block Diagram of Test Setup.....	6
3.3	Justification.....	7
3.4	Software Exercise Program.....	7
3.5	Mode of operation during test	7
3.6	Modifications required for Compliance.....	7
3.7	Additions, deviations and exclusions from standards	7
4.0	Measurement Results.....	8
4.1	Conducted Output Power at Antenna Terminal.....	8
4.2	26 dB Bandwidth	9
4.3	Power Density	14
4.4	The ratio of the peak excursion of the modulation envelope to the peak power.....	28
4.5	Out-of-Band Conducted Emissions.....	37
4.6	Radiated Emissions	39
4.7	AC Line Conducted Emission.....	45
5.0	List of Test Equipment.....	50
6.0	Document History.....	51
7.0	Appendix A.....	51
8.0	Appendix B.....	51
9.0	Appendix C.....	51
10.0	Appendix D.....	51

Proxim Corporation, Model No: 40100-XXX
FCC ID: HZB-US58-S60**Date of Test: September 20 to 23, 2001****1.0 Summary of Tests****Proxim Corporation,
Tsunami Subscriber Unit, Model: 40100-XXX
FCC ID: HZB-US58-S60**

Test	Reference	Results
Output power	15.407(a)	Complies, see sec. 4.1 of this report
26 dB Bandwidth	15.407(a)	For calculation only, see sec. 4.2 of this report
Power Density	15.407(a)(5)	Complies, see sec. 4.3 of this report
The ratio of the peak excursion of the modulation envelope to the peak transmit power	15.407(a)(6)	Complies, see sec. 4.4 of this report
Out-of-band Antenna Conducted Emission	15.407(b)	Complies, see sec. 4.5 of this report
Spurious Radiated Emission from transmitter	15.407(b)	Complies, see sec. 4.6 of this report
Radiated Emission in Restricted Bands	15.209, 15.205	Complies, see sec. 4.6 of this report
Radiated Emission from digital part and receiver	15.109	Complies, see sec. 4.6 of this report
AC Conducted Emission	15.207	Complies, see sec. 4.7 of this report
Requirement	15.407(c)	Complies, see file " Appendix D"
Requirement	15.407(g)	Complies, see file " Appendix D"
Radiation Exposure Requirement	1.1310	Complies, see file "RF Exposure Statement"
Antenna Requirement	15.203	Complies, the EUT uses a permanently connected antenna

Proxim Corporation, Model No: 40100-XXX
FCC ID: HZB-US58-S60

Date of Test: September 20 to 23, 2001

2.0 General Description

2.1 Product Description

The Tsunami Subscriber Unit consists of two major components: an outdoor unit (ODU) and an indoor power adapter (IPA). The two components are connected with a single category-5 cable (4 unshielded twisted pairs) to transfer direct-current power to the ODU and to transport 10/100BaseT Ethernet data to and from the ODU. The IPA provides a RJ-45 jack to connect the Ethernet data to either a computer or hub/switch. The ODU is an integrated antenna, radio, modem, and Ethernet interface to provide fixed, broadband digital data services for individuals, businesses, and institutions.

As the device is used at a remote location to communicate with the Base Station unit at a central location, the transmission of the Subscriber unit is of fixed point-to-point.

A pre-production version of the EUT was received on September 18, 2001 in good operating condition.

Overview of the Tsunami Subscriber Unit

Applicant	Proxim Corporation
Trade Name & Model No.	Tsunami Subscriber Unit, Model 40100-XXX
FCC Identifier	HZB-US58-S60
Use of Product	Fixed Wireless Ethernet Access
Type of Transmission	TDD
Type of Modulation	QAM16, QAM8, QPSK R ³ / ₄ , QPSK R ¹ / ₂
Rated RF Output	18 dBm (peak)
Frequency Range	5740– 5810 MHz
Number of Channel(s)	6 channels maximum
Antenna(s) & Gain	Circle polarized internal permanently connected antenna, 21 dBi gain
Antenna Requirement	☒ The EUT uses a permanently connected antenna. ☐ The antenna is affixed to the EUT using a unique connector which allows for replacement of a broken antenna, but DOES NOT use a standard antenna jack or electrical connector. ☐ The EUT requires professional installation (attach supporting documentation if using this option).
Manufacturer name & address	Proxim Corporation 1196 Borregas Avenue, Sunnyvale, , CA 94089 USA

Proxim Corporation, Model No: 40100-XXX
FCC ID: HZB-US58-S60

Date of Test: September 20 to 23, 2001

2.2 Related Submittal(s) Grants

None.

2.3 Test Methodology

Both AC mains line-conducted and radiated emissions measurements were performed according to the procedures in ANSI C63.4 (1992). Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Data Sheet**" of this Application. All other measurements were made in accordance with the procedures in parts 2 and 15 of CFR 47.

2.4 Test Facility


The open area test site and conducted measurement facility used to collect the radiated data is site 2. This test facility and site measurement data have been fully placed on file with the FCC and NVLAP accredited.

3.0 System Test Configuration

3.1 Support Equipment and description

Laptop computer: Hewlett Packard Omnibook 4150

3.2 Block Diagram of Test Setup

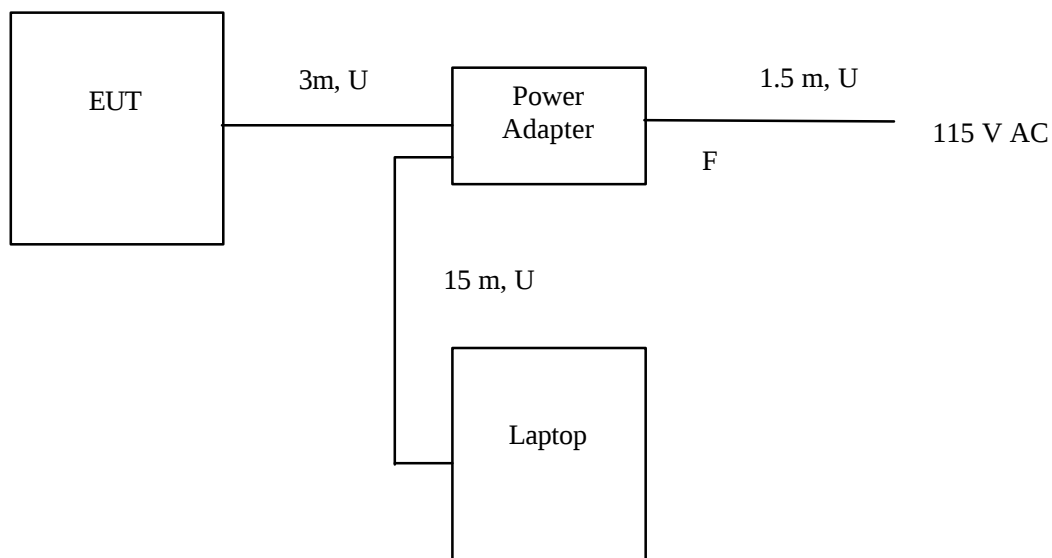

* = EUT

** = No Ferrite on video cable

S = Shielded;

U = Unshielded

F = With Ferrite

M = Length in Meters

Proxim Corporation, Model No: 40100-XXX
FCC ID: HZB-US58-S60

Date of Test: September 20 to 23, 2001

3.3 Justification

For emission testing, the Equipment Under Test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). During testing, all cables were manipulated to produce worst case emissions.

For radiated emission measurements, the EUT is attached to a cardboard box (if necessary) and placed on the wooden turntable. If the EUT attaches to peripherals, they are connected and operational (as typical as possible). The EUT is wired to transmit full power.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. All readings are extrapolated back to the equivalent three-meter reading using inverse scaling with distance.

3.4 Software Exercise Program

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. For emissions testing, the units were setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing.

3.5 Mode of operation during test

100% time transmitting signal on different channels.

3.6 Modifications required for Compliance

No modifications were installed by Intertek Testing Services during compliance testing in order to bring the product into compliance (Please note that this does not include changes made specifically by Proxim Cor. prior to compliance testing).

3.7 Additions, deviations and exclusions from standards

No additions, deviations or exclusion have been made from standard.

4.0 Measurement Results**4.1 Conducted Output Power at Antenna Terminal**
FCC Rule 15.407(a)Requirement:

For fixed point-to-point U-NII devices operating in 5.725-5.825 GHz band, the peak transmit power shall not exceed the lesser of 1 Watt (30 dBm) or 17 dBm+10Log(B), where B is the 26dB emission bandwidth in MHz (for antenna gain up to 23 dBi). For devices operating in 5.25-5.35 GHz band, the peak transmit power shall not exceed the lesser of 250 mW (24 dBm) or 11 dBm + 10Log(B), where B is the 26 dB emission bandwidth in MHz (for antenna gain up to 6 dBi).

Procedure:

The antenna port of the EUT was connected to the input of a peak power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal.

Result:

Frequency MHz	Peak Output Power for different type of modulation, dBm				Limit (dBm)
	QAM16	QAM8	QPSK R $\frac{3}{4}$	QPSK R $\frac{1}{2}$	
5740	18.1	16.3	16.2	16.3	30
5754	18.1	16.2	16.2	16.3	30
5768	18.0	16.3	16.2	16.2	30
5782	18.1	16.2	16.1	16.3	30
5796	18.0	16.2	16.1	16.2	30
5810	18.1	16.2	16.1	16.2	30


Proxim Corporation, Model No: 40100-XXX
FCC ID: HZB-US58-S60**Date of Test: September 20 to 23, 2001**


- 4.2 26 dB Bandwidth
FCC Rule 15.407(a) (for calculation only)

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer Res BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 26 dB lower than PEAK level. The 26-dB bandwidth was determined from where the channel output spectrum intersected the display line.

Refer to the following plots for 26-dB bandwidth:

Frequency, MHz	Mode	26 dB Bandwidth, MHz	Plot
5768	QAM16	25.40	1.a
5768	QAM8	25.25	1.b
5768	QPSK R $\frac{3}{4}$	25.70	1.c
5768	QPSK R $\frac{1}{2}$	25.45	1.d

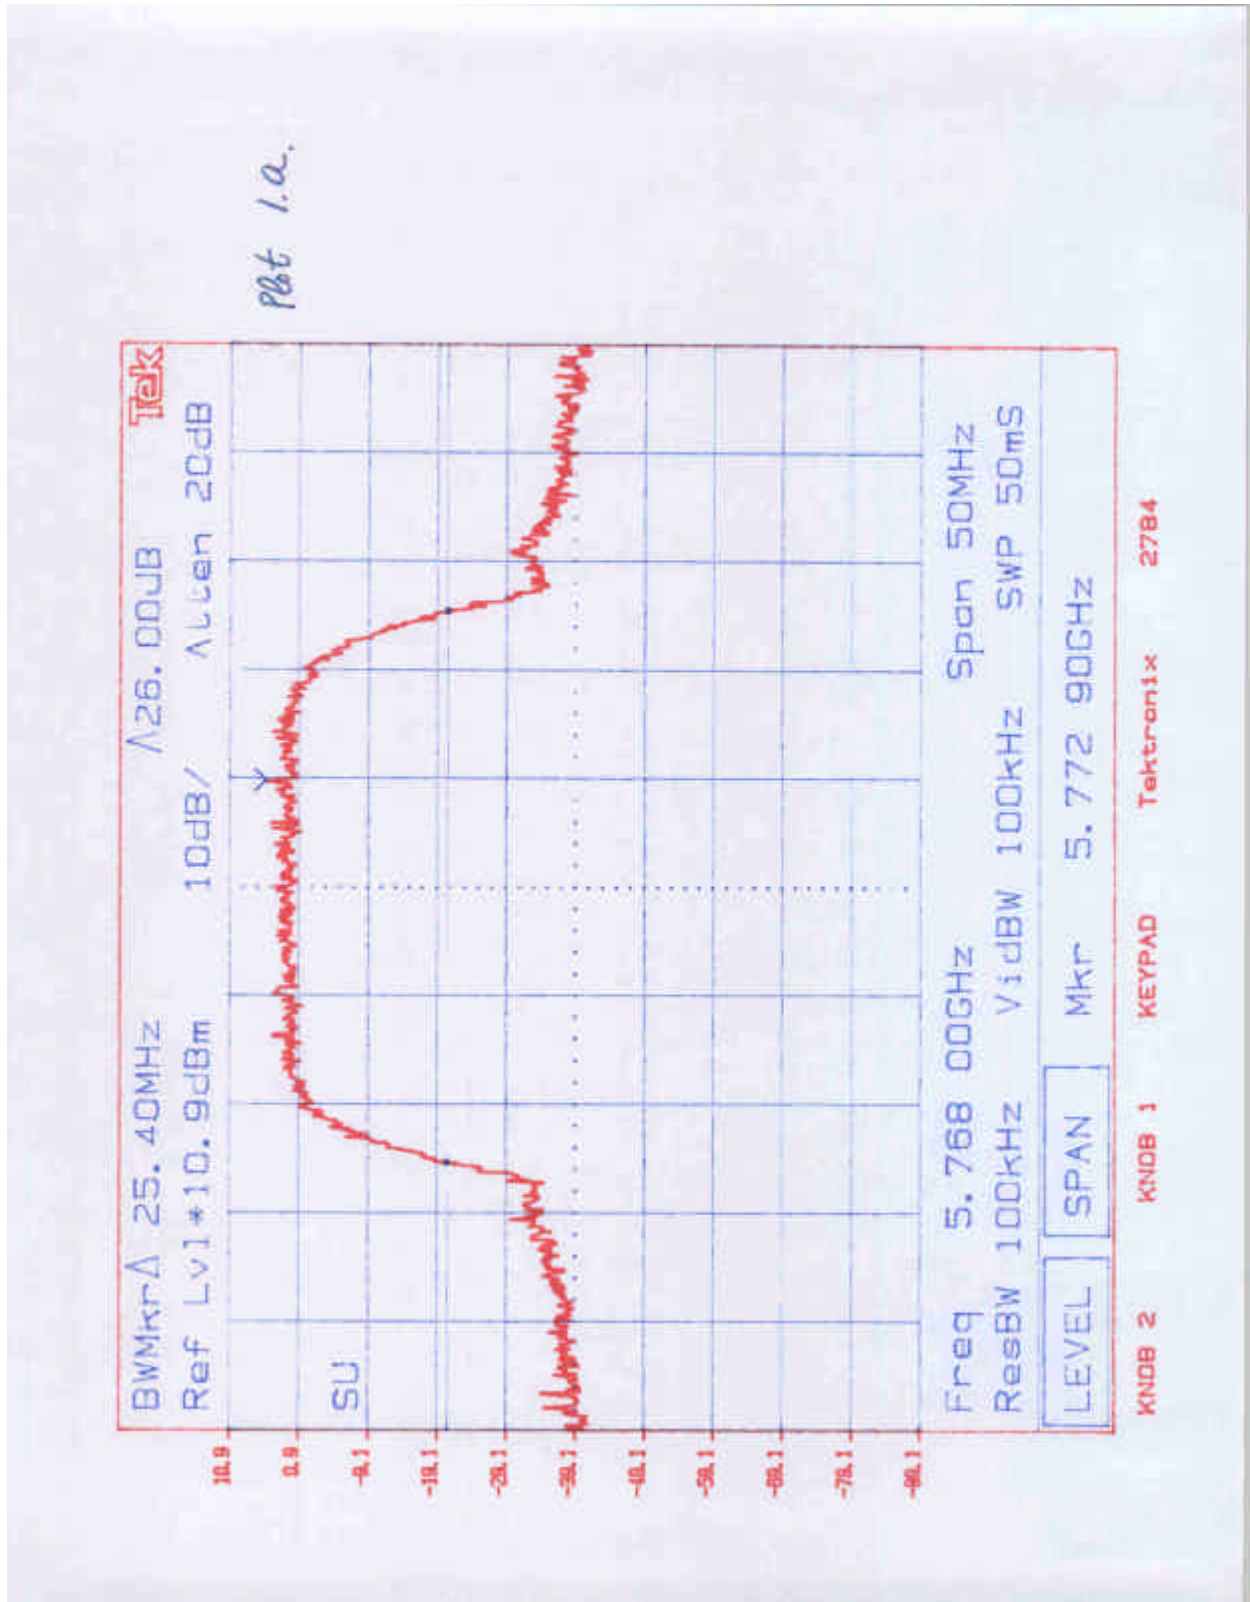


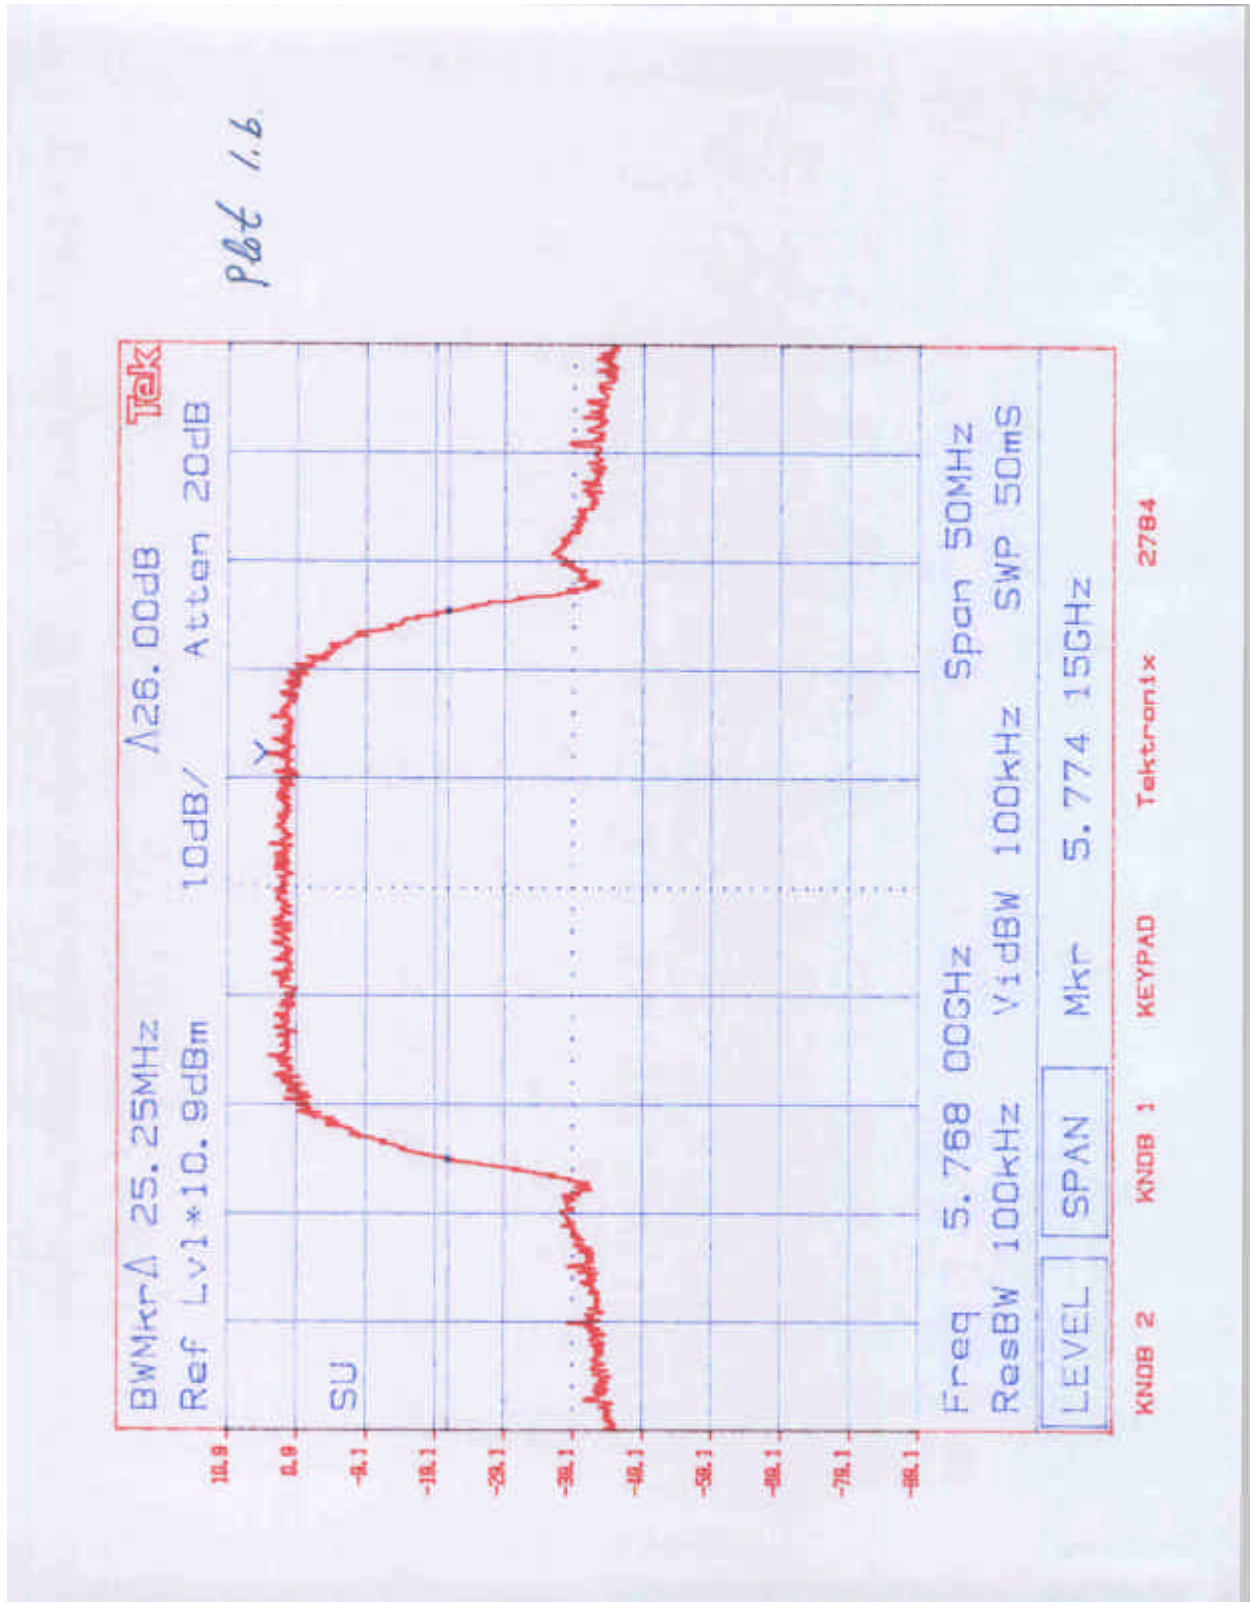


Proxim Corporation, Model No: 40100-XXX

FCC ID: HZB-US58-S60

Date of Test: September 20 to 23, 2001

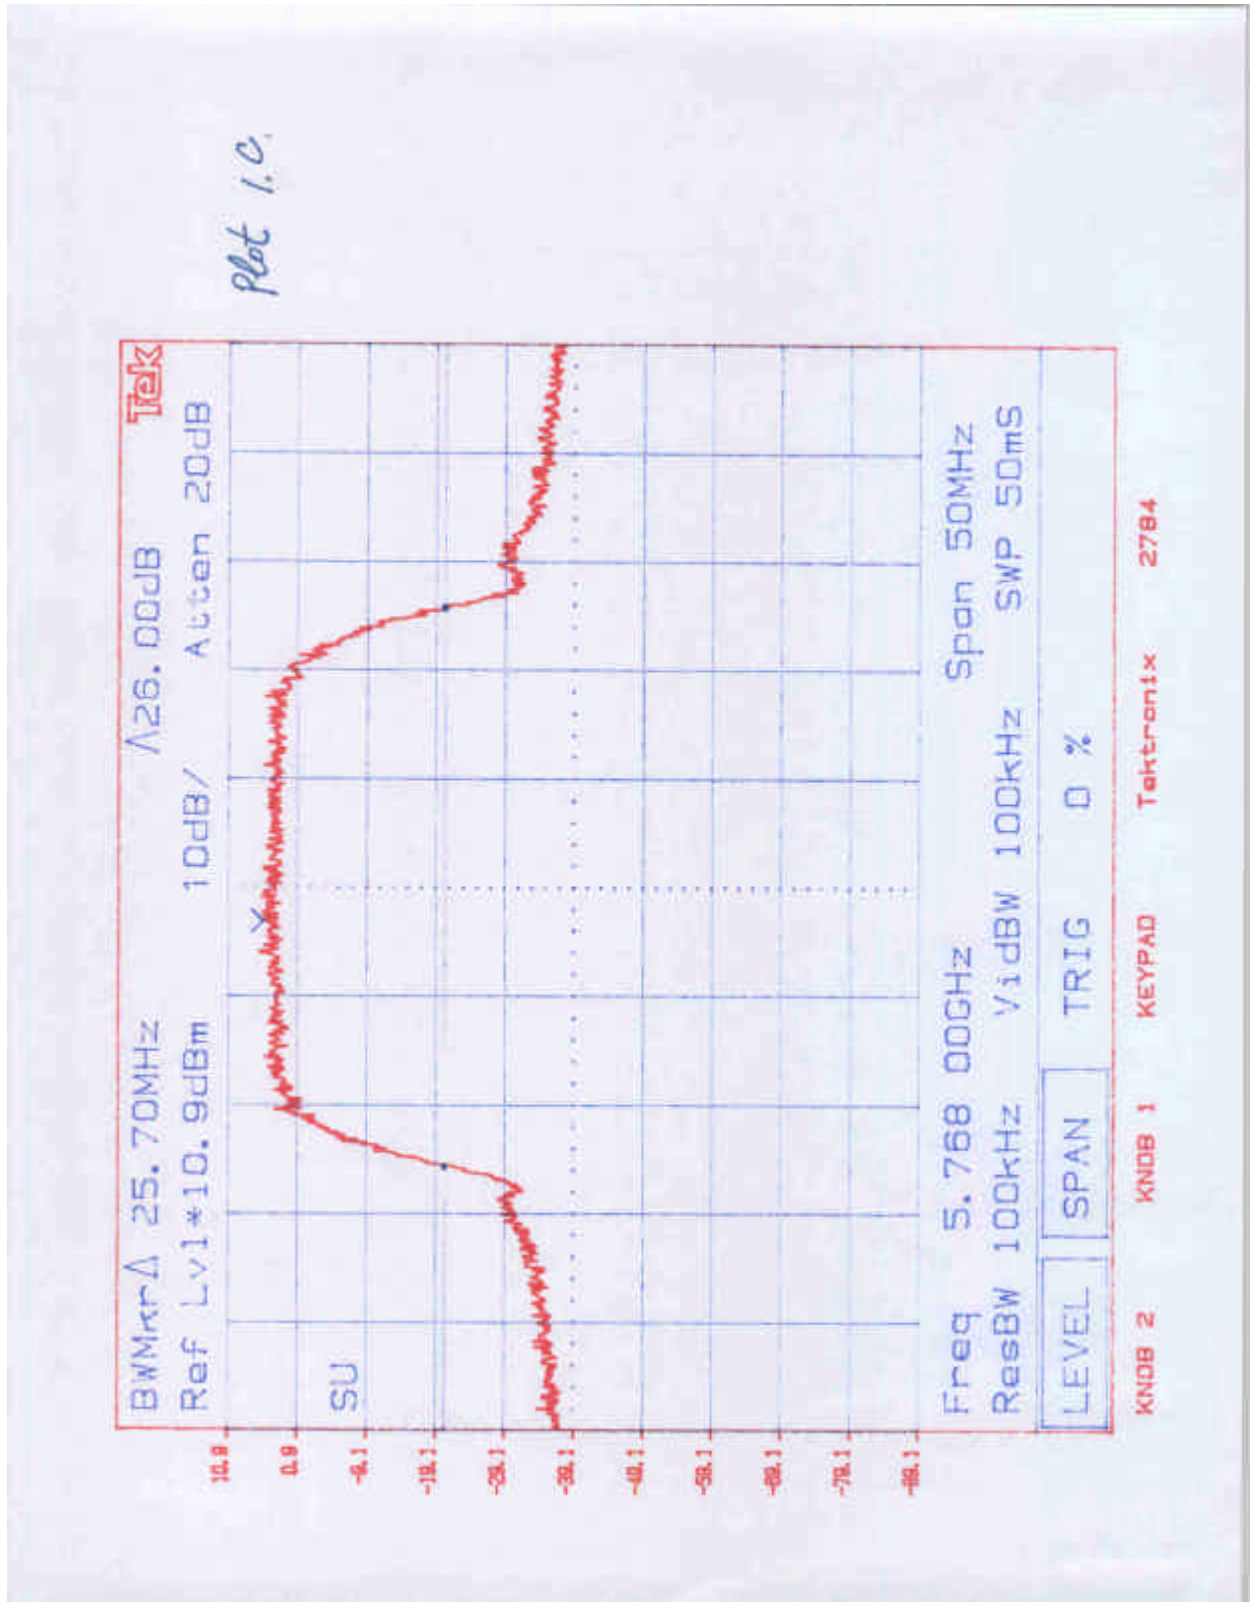

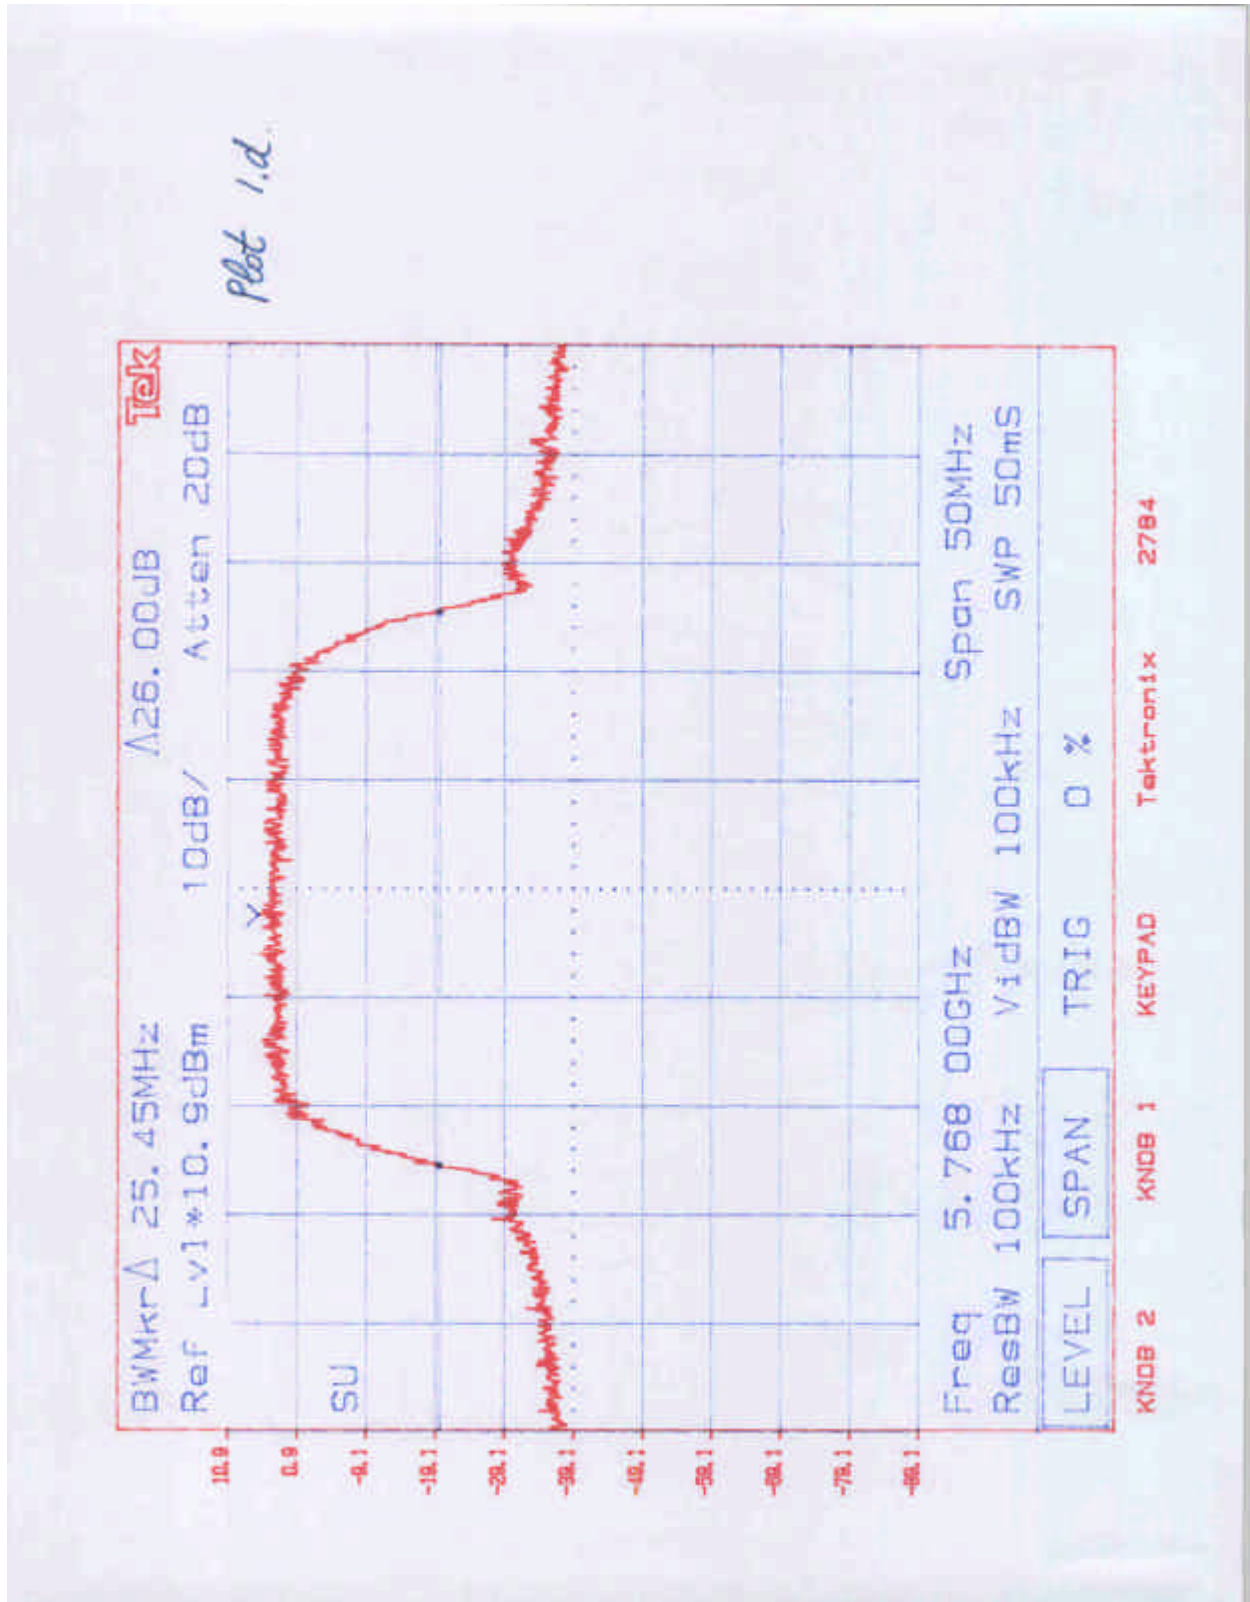

Proxim Corporation, Model No: 40100-XXX
FCC ID: HZB-US58-S60

Date of Test: September 20 to 23, 2001

4.3 Power Density
FCC Rule 15.407(a)(3)

Requirement:

For fixed point-to-point U-NII devices operating in 5.725-5.825 GHz band the peak power spectral density shall not exceed 17 dBm in any 1 MHz band (for antenna gain up to 23 dBi).

For devices operating in 5.25-5.35 GHz band peak power spectral density shall not exceed 11 dBm in any 1 MHz band (for antenna gain up to 6 dBi).

Procedure:

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

The spectrum analyzer Resolution Bandwidth was set to 1 MHz and Video Bandwidth was set to 7 MHz. The START and STOP frequencies were set to the band edges of the maximum output passband. Maximum peak-power spectral density reading was recorded.

Result:

Frequency MHz	Peak Power Density for different type of modulation, dBm			
	QAM16	QAM8	QPSK R $\frac{3}{4}$	QPSK R $\frac{1}{2}$
5740	12.65	11.65	11.45	12.85
5768	13.65	10.25	11.45	11.95
5810	12.85	11.45	10.65	12.25

Frequency MHz	EIRP Density for different type of modulation, dBm				EIRP Density Limit (dBm)
	QAM16	QAM8	QPSK R $\frac{3}{4}$	QPSK R $\frac{1}{2}$	
5740	33.65	32.65	32.45	33.85	40
5768	34.65	31.25	32.45	32.95	40
5810	33.85	32.45	31.65	33.25	40

Note: antenna gain equals 21 dBi

Proxim Corporation, Model No: 40100-XXX
FCC ID: HZB-US58-S60**Date of Test: September 20 to 23, 2001**


Refer to the following plots for Power Density:

Plot		Mode	Channel
2.a	Power Density	QAM16	Ch 0
2.b	Power Density	QAM16	Ch 2
2.c	Power Density	QAM16	Ch 5
2.d	Power Density	QAM8	Ch 0
2.e	Power Density	QAM8	Ch 2
2.f	Power Density	QAM8	Ch 5
2.g	Power Density	QPSK R $\frac{3}{4}$	Ch 0
2.h	Power Density	QPSK R $\frac{3}{4}$	Ch 2
2.i	Power Density	QPSK R $\frac{3}{4}$	Ch 5
2.j	Power Density	QPSK R $\frac{1}{2}$	Ch 0
2.k	Power Density	QPSK R $\frac{3}{4}$	Ch 2
2.l	Power Density	QPSK R $\frac{3}{4}$	Ch 5

Proxim Corporation, Model No: 40100-XXX

FCC ID: HZB-US58-S60


Date of Test: September 20 to 23, 2001

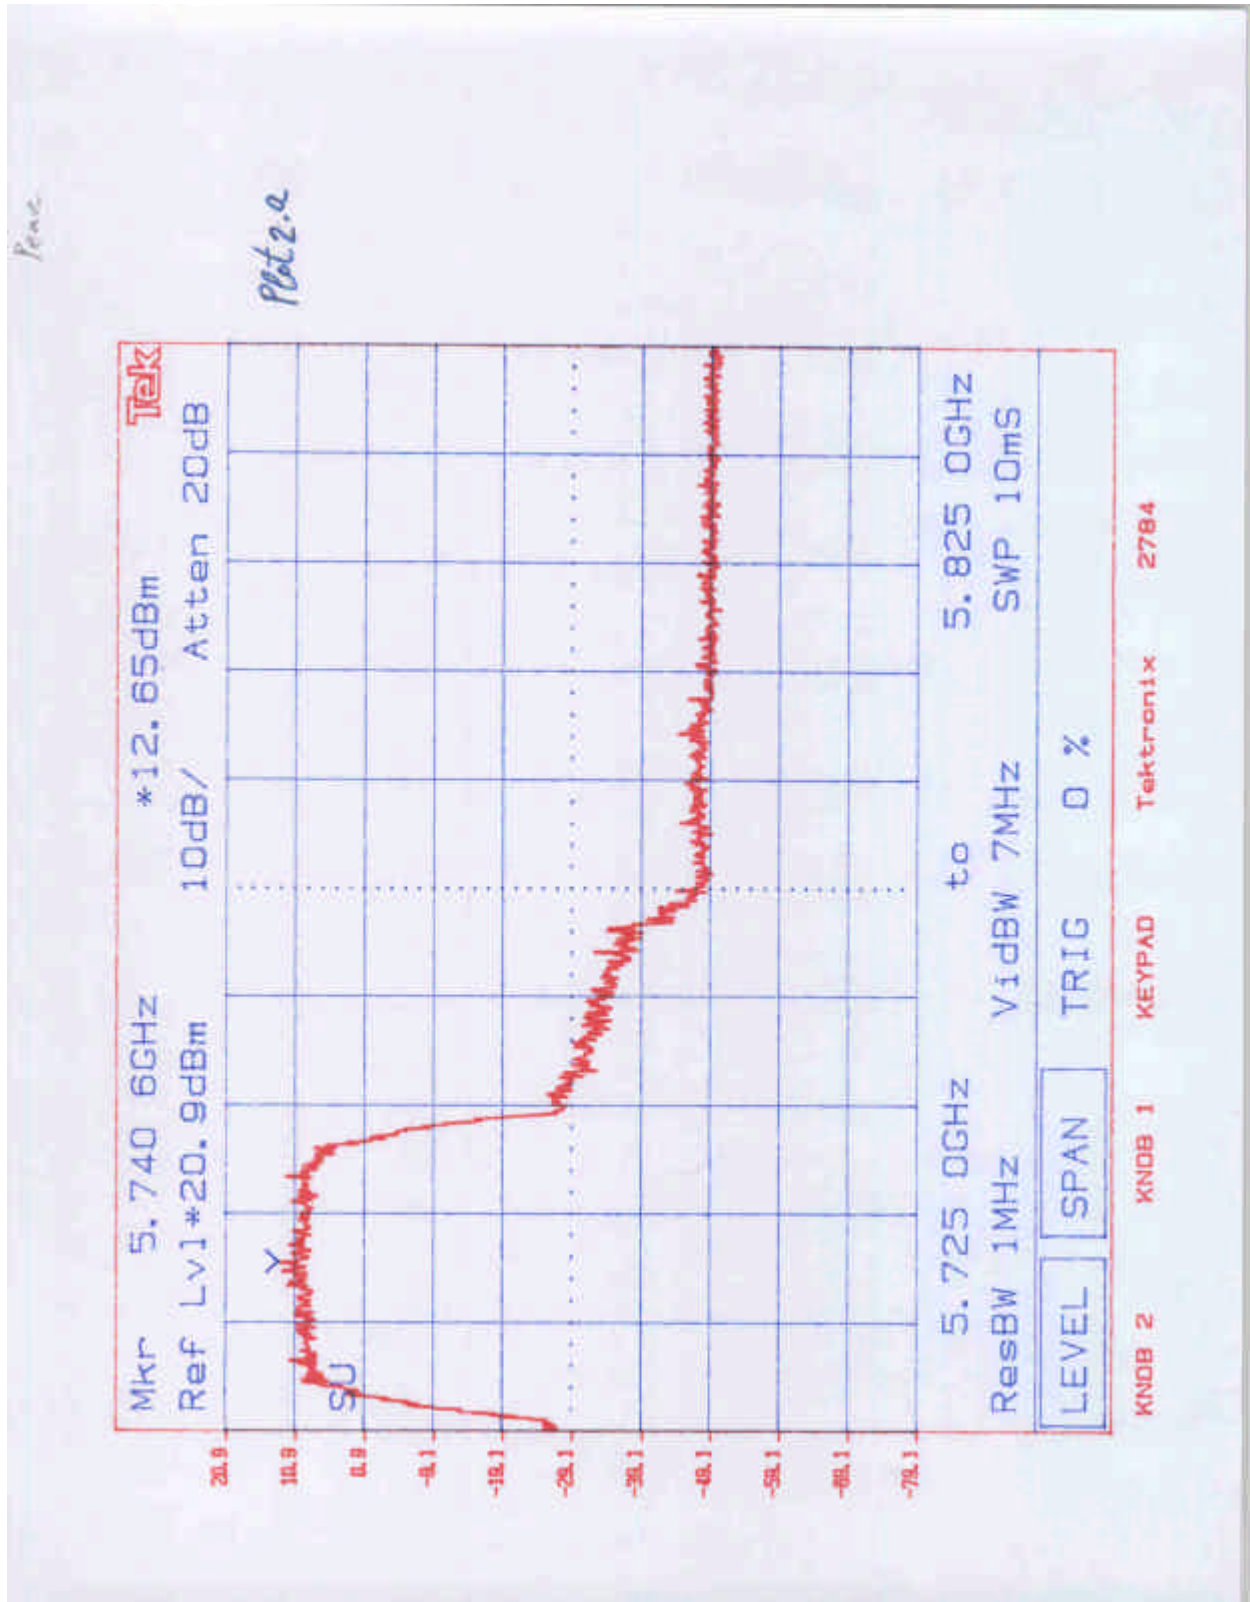


Proxim Corporation, Model No: 40100-XXX

FCC ID: HZB-US58-S60

Date of Test: September 20 to 23, 2001

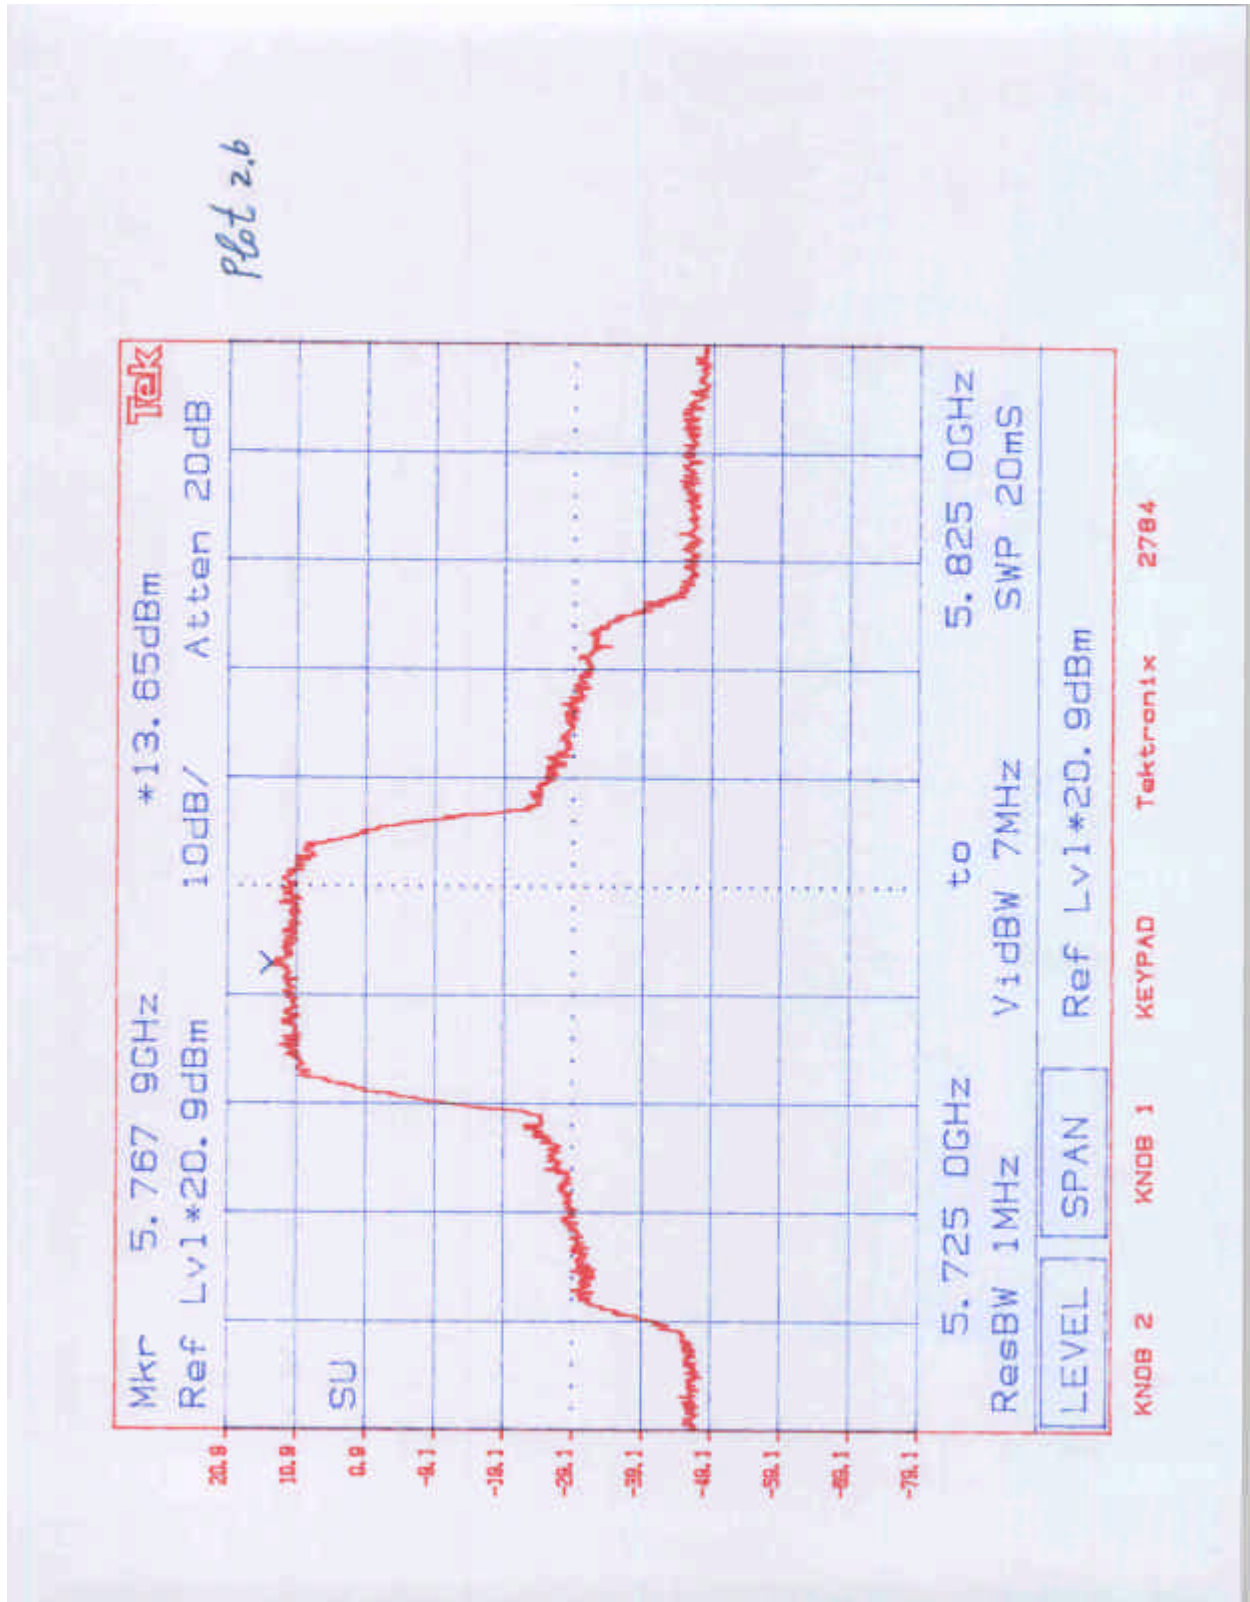


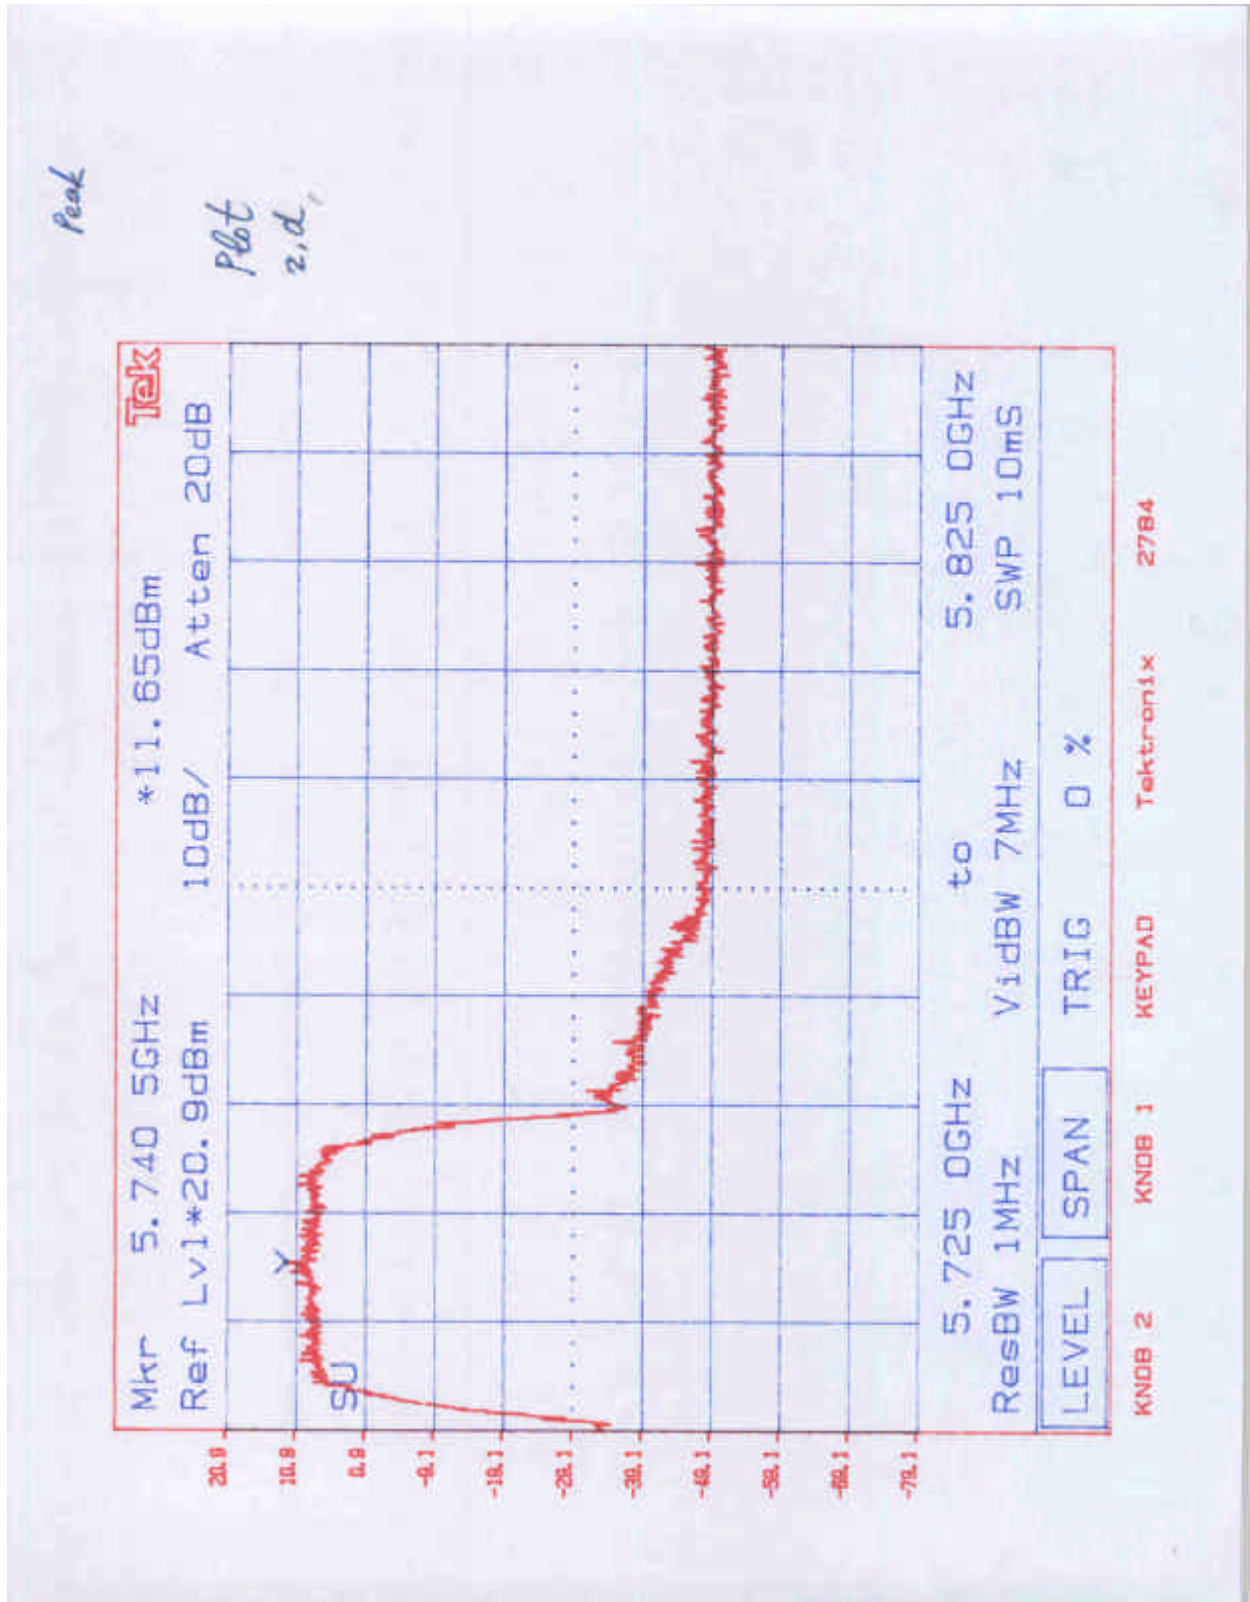



Proxim Corporation, Model No: 40100-XXX

FCC ID: HZB-US58-S60


Date of Test: September 20 to 23, 2001

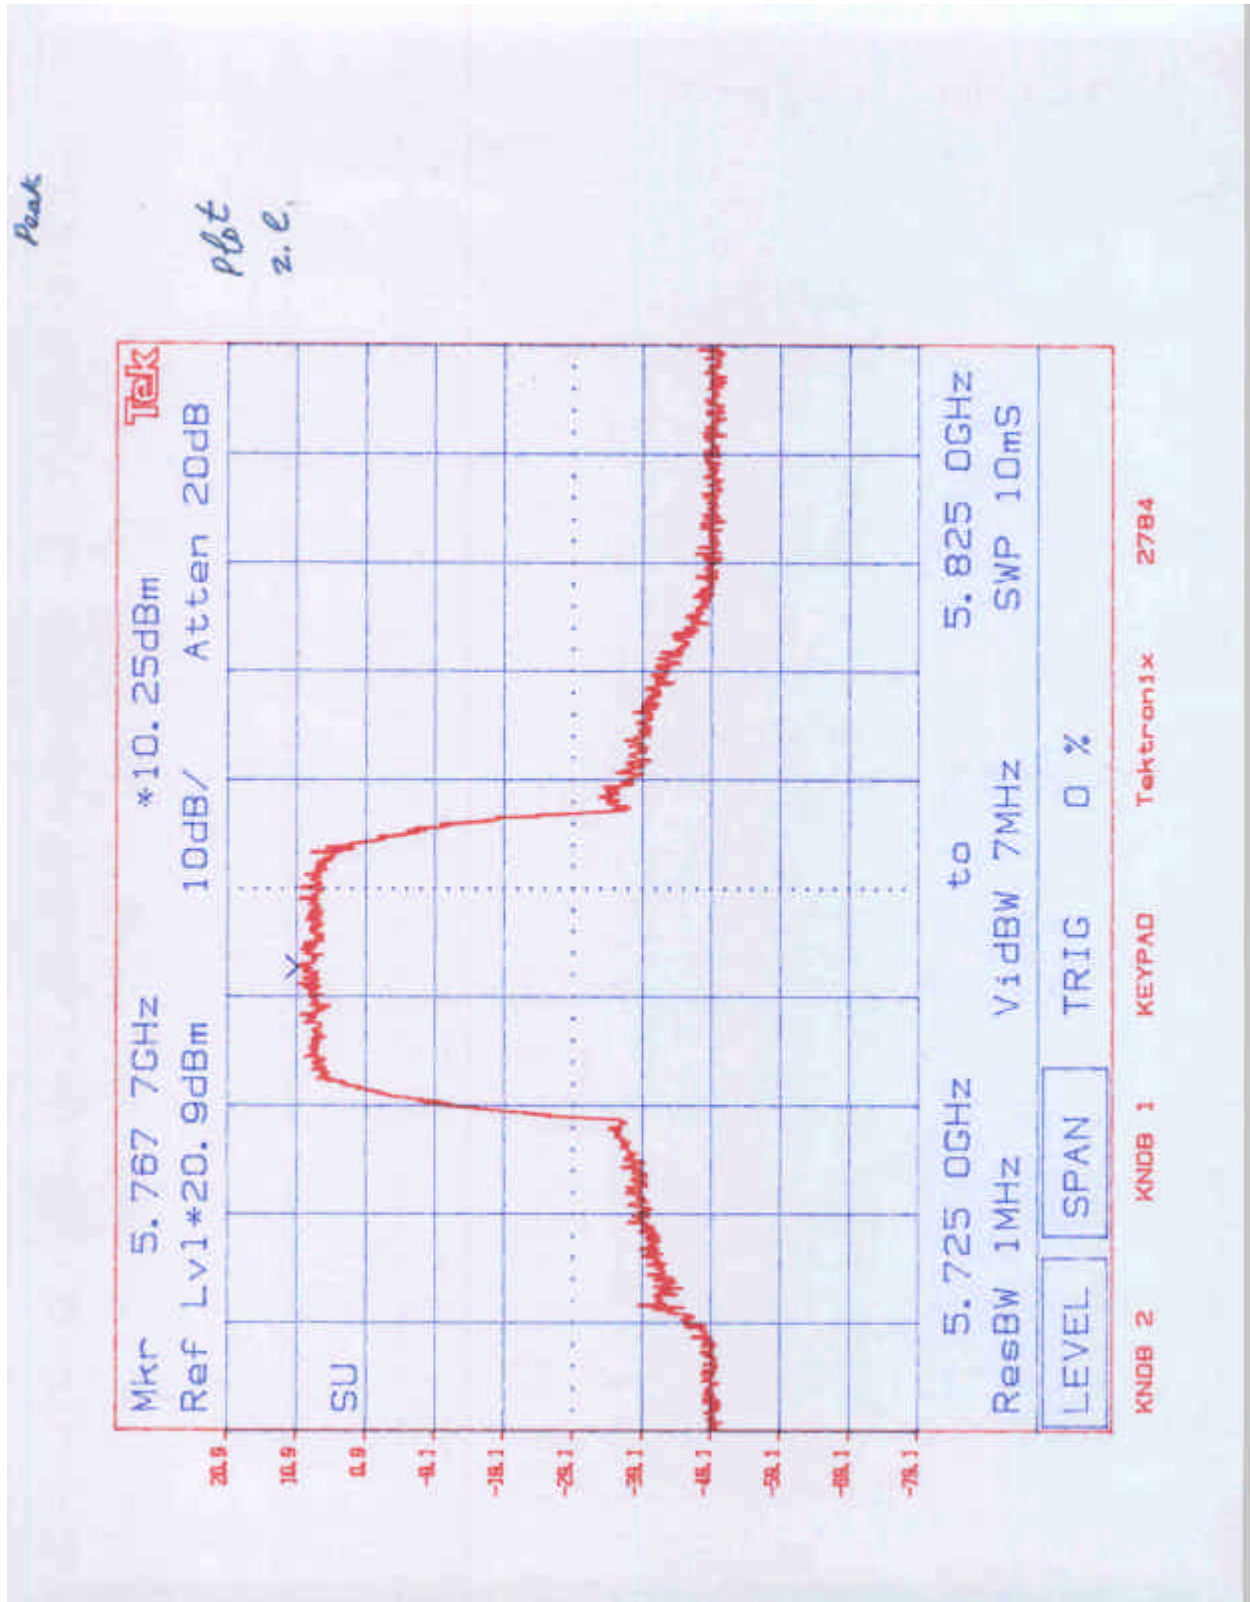


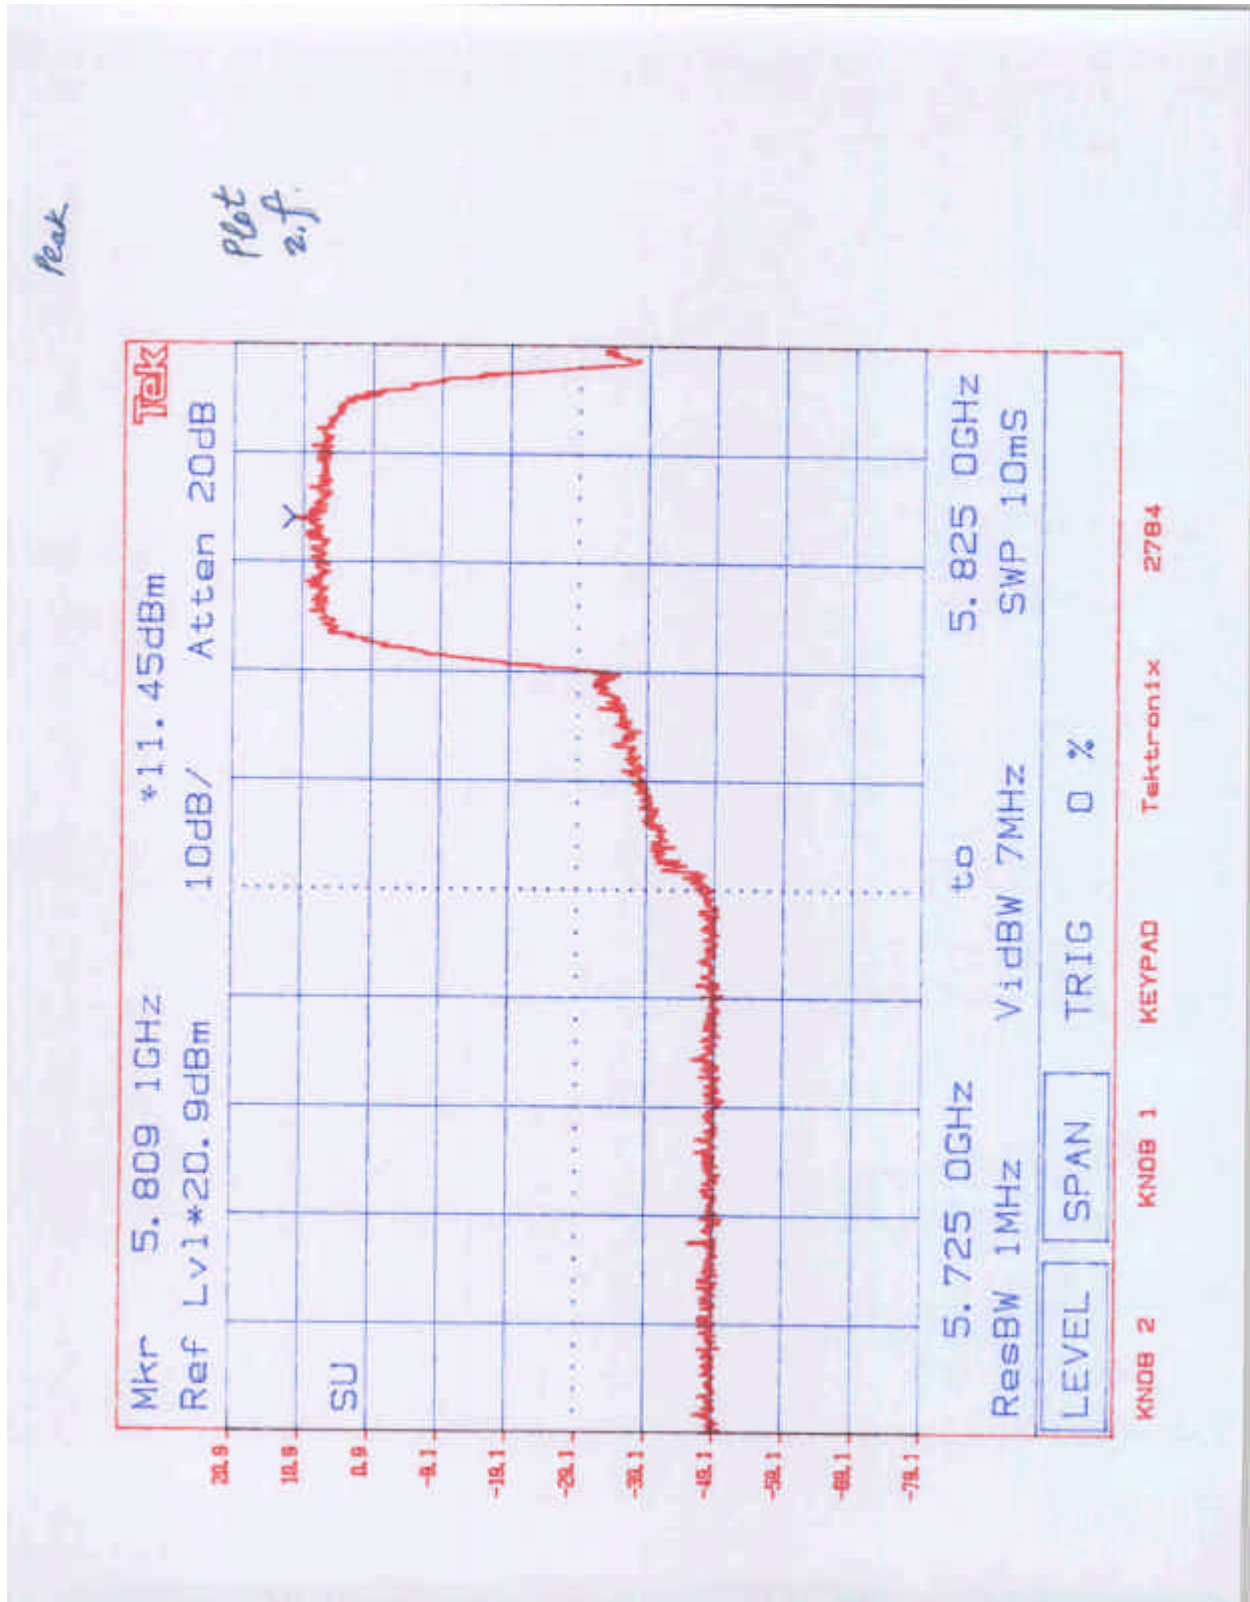

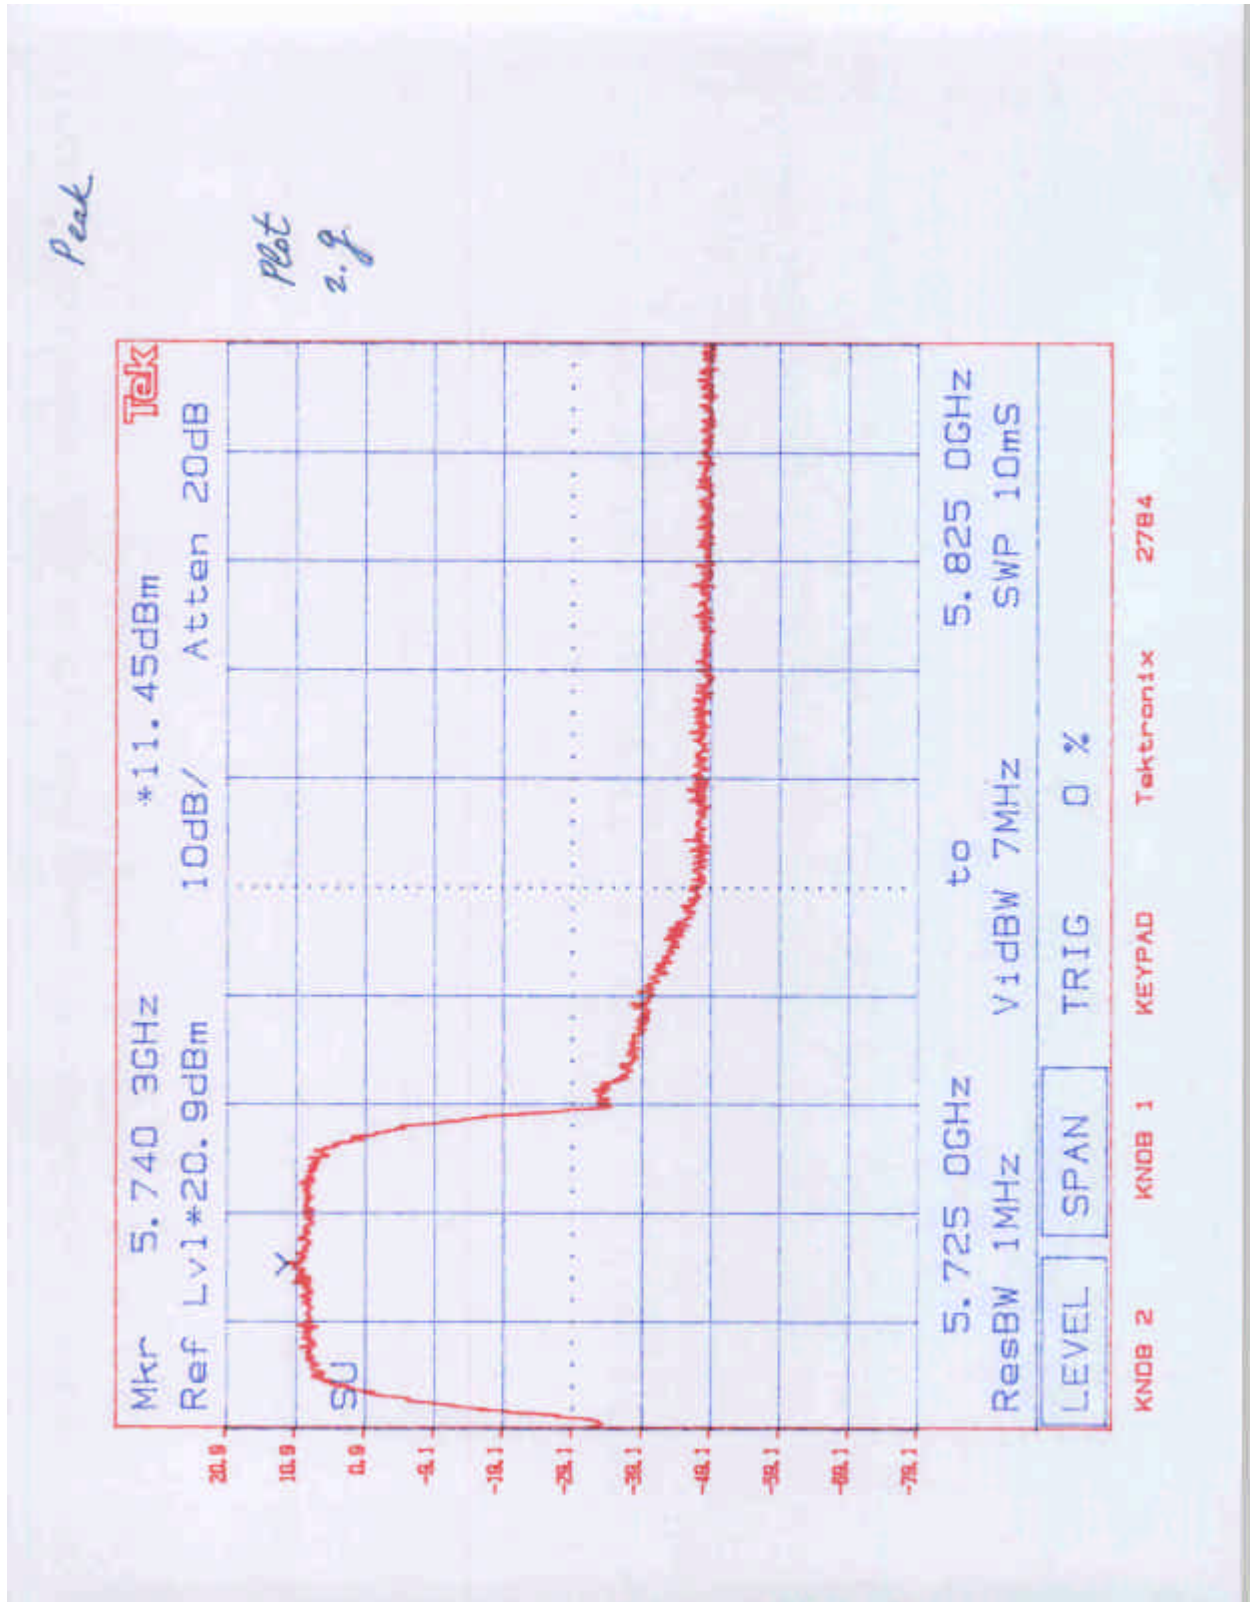



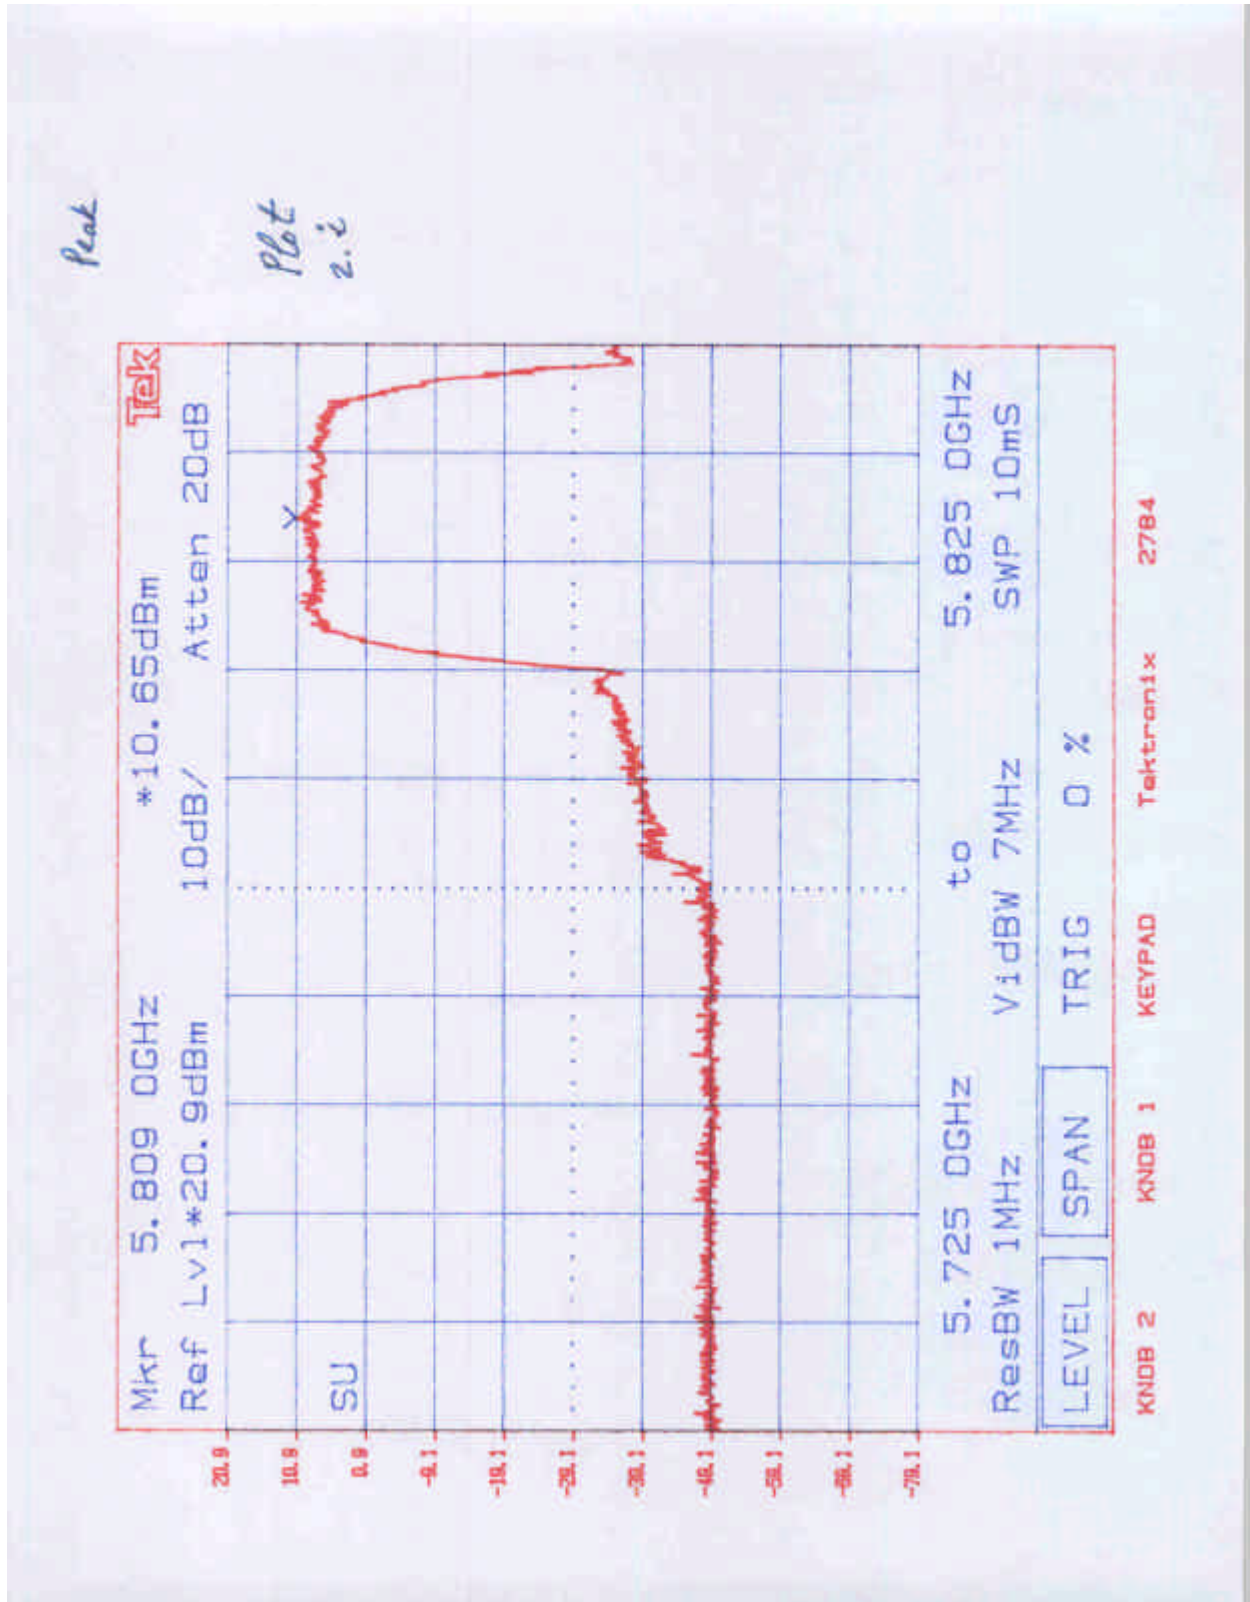


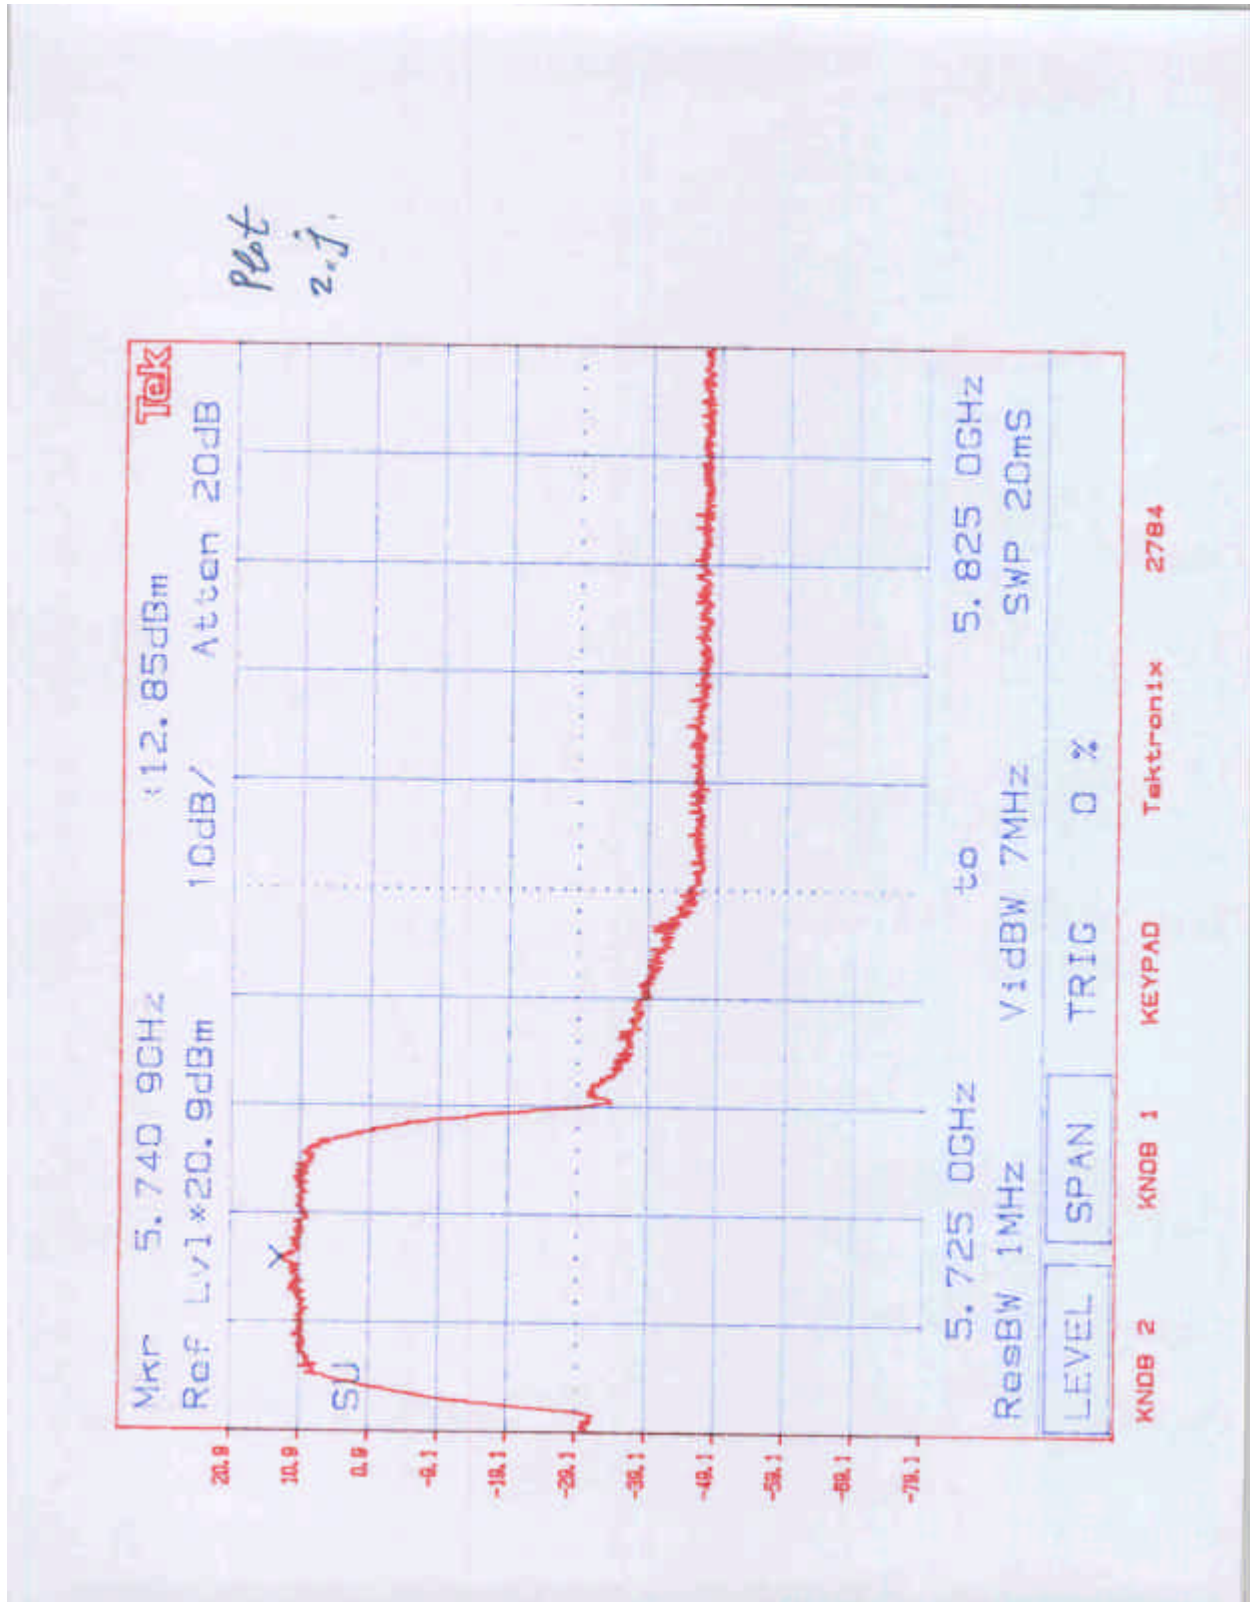

Proxim Corporation, Model No: 40100-XXX

FCC ID: HZB-US58-S60

Date of Test: September 20 to 23, 2001

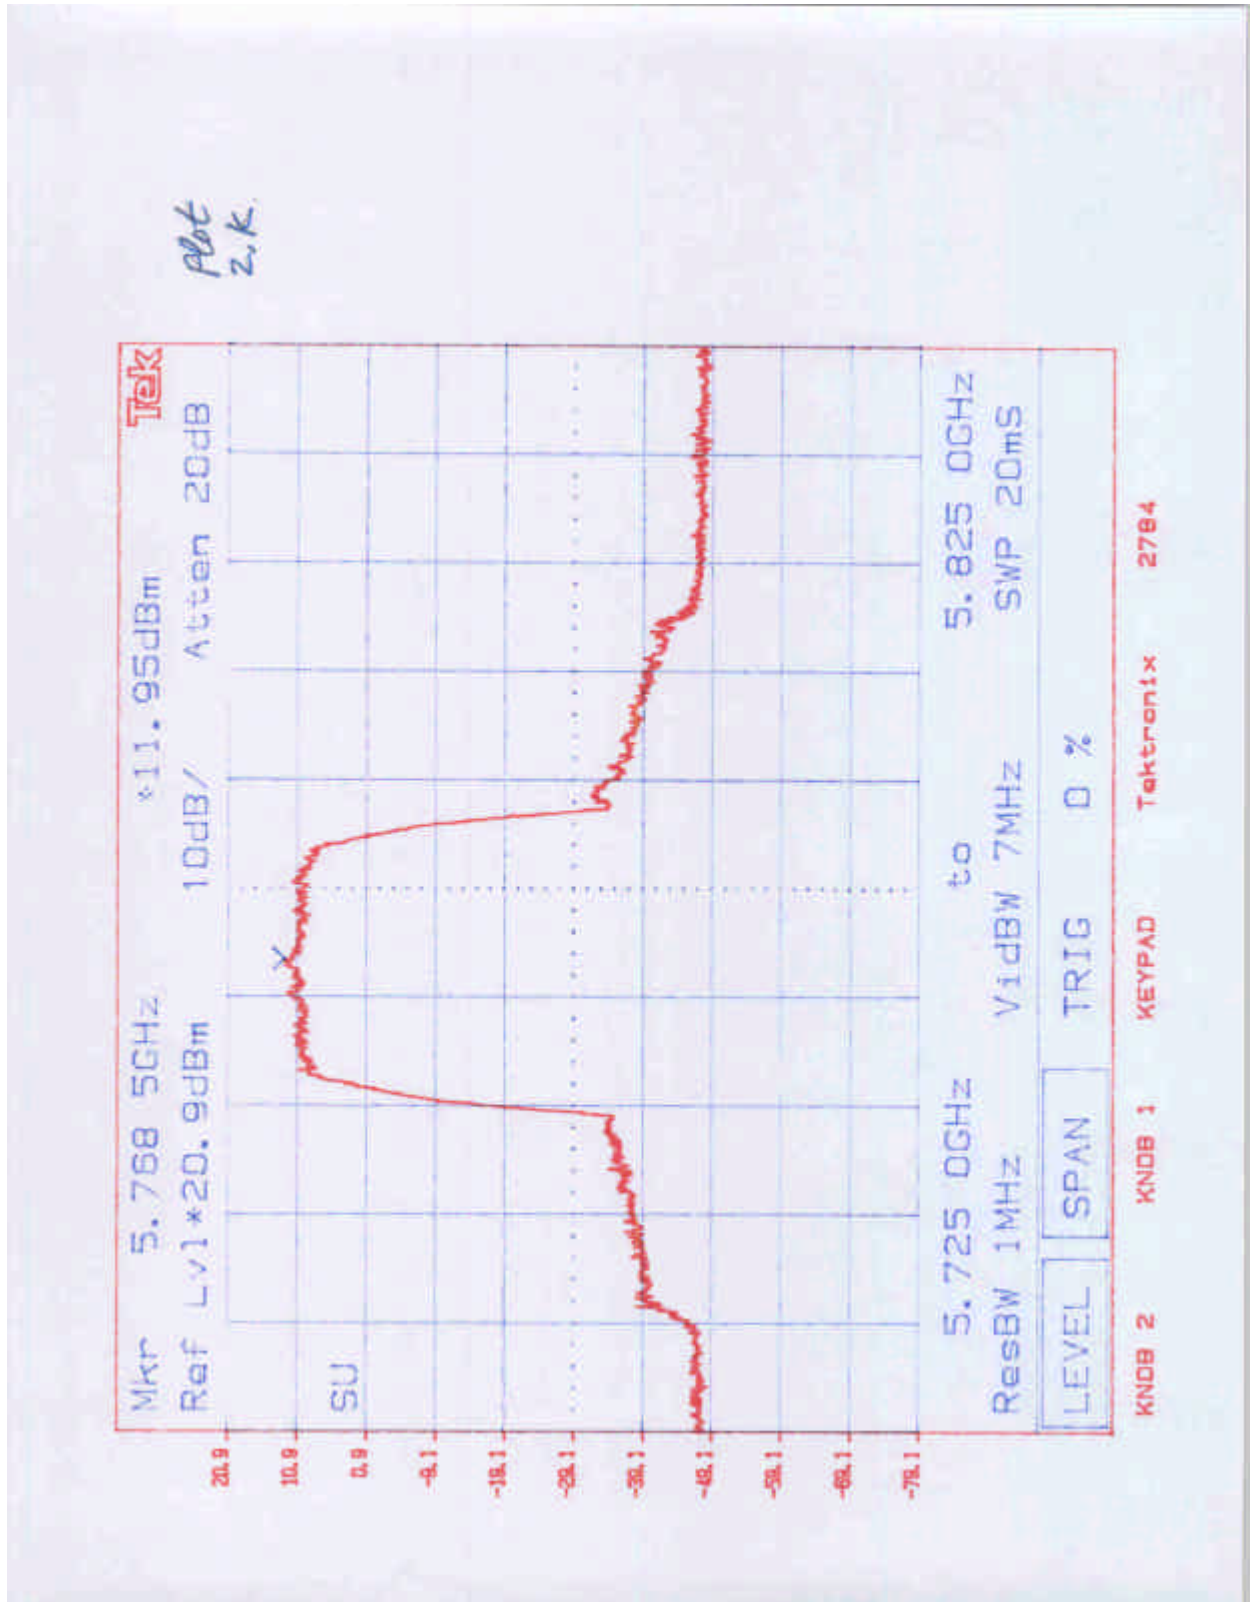



Proxim Corporation, Model No: 40100-XXX

FCC ID: HZB-US58-S60

Date of Test: September 20 to 23, 2001

- 4.4 The ratio of the peak excursion of the modulation envelope to the peak power
FCC Rule 15.407(a)(6)

Requirement:

The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13 dB.


Procedure:

Spectrum Analyzer was connected to the output of the EUT. The Resolution Bandwidth was set to 1 MHz. Two plots were made in each band: with the Video Bandwidth set to 7 MHz and with the Video Bandwidth set to 30 kHz. The difference between spectrum analyzer readings indicates the ratio of the peak excursion of the modulation envelope to the peak transmit power.

Test Result:

See attached plots for the ratio of the peak excursion of the modulation envelope to the peak power. The maximum Ratio is 7.3 dB.

15.407(a)(6)		
3.a.1 – 3.a.2	Ch 2	QAM16
3.b.1 – 3.b.2	Ch 2	QAM8
3.c.1 – 3.c.2	Ch 2	QPSK R $\frac{3}{4}$
3.d.1 – 3.d.2	Ch 2	QPSK R $\frac{1}{2}$

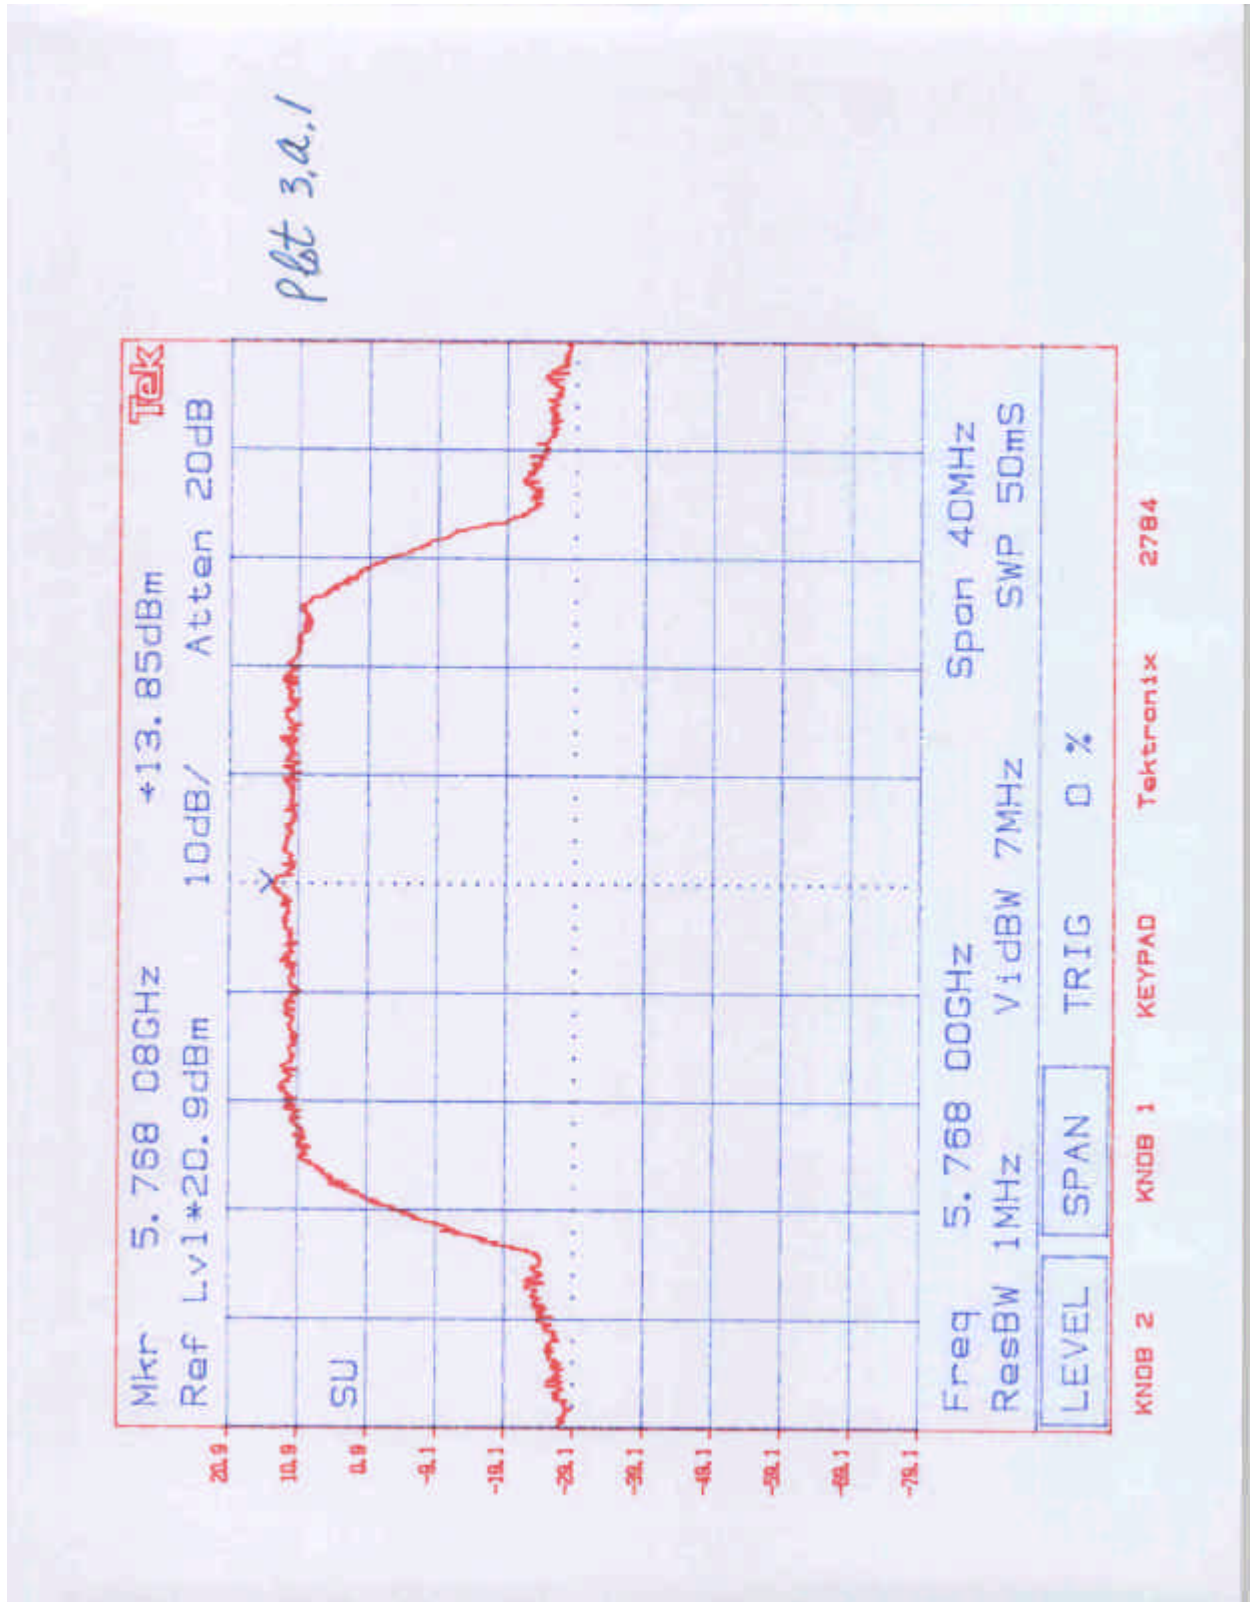



Proxim Corporation, Model No: 40100-XXX


FCC ID: HZB-US58-S60

Date of Test: September 20 to 23, 2001



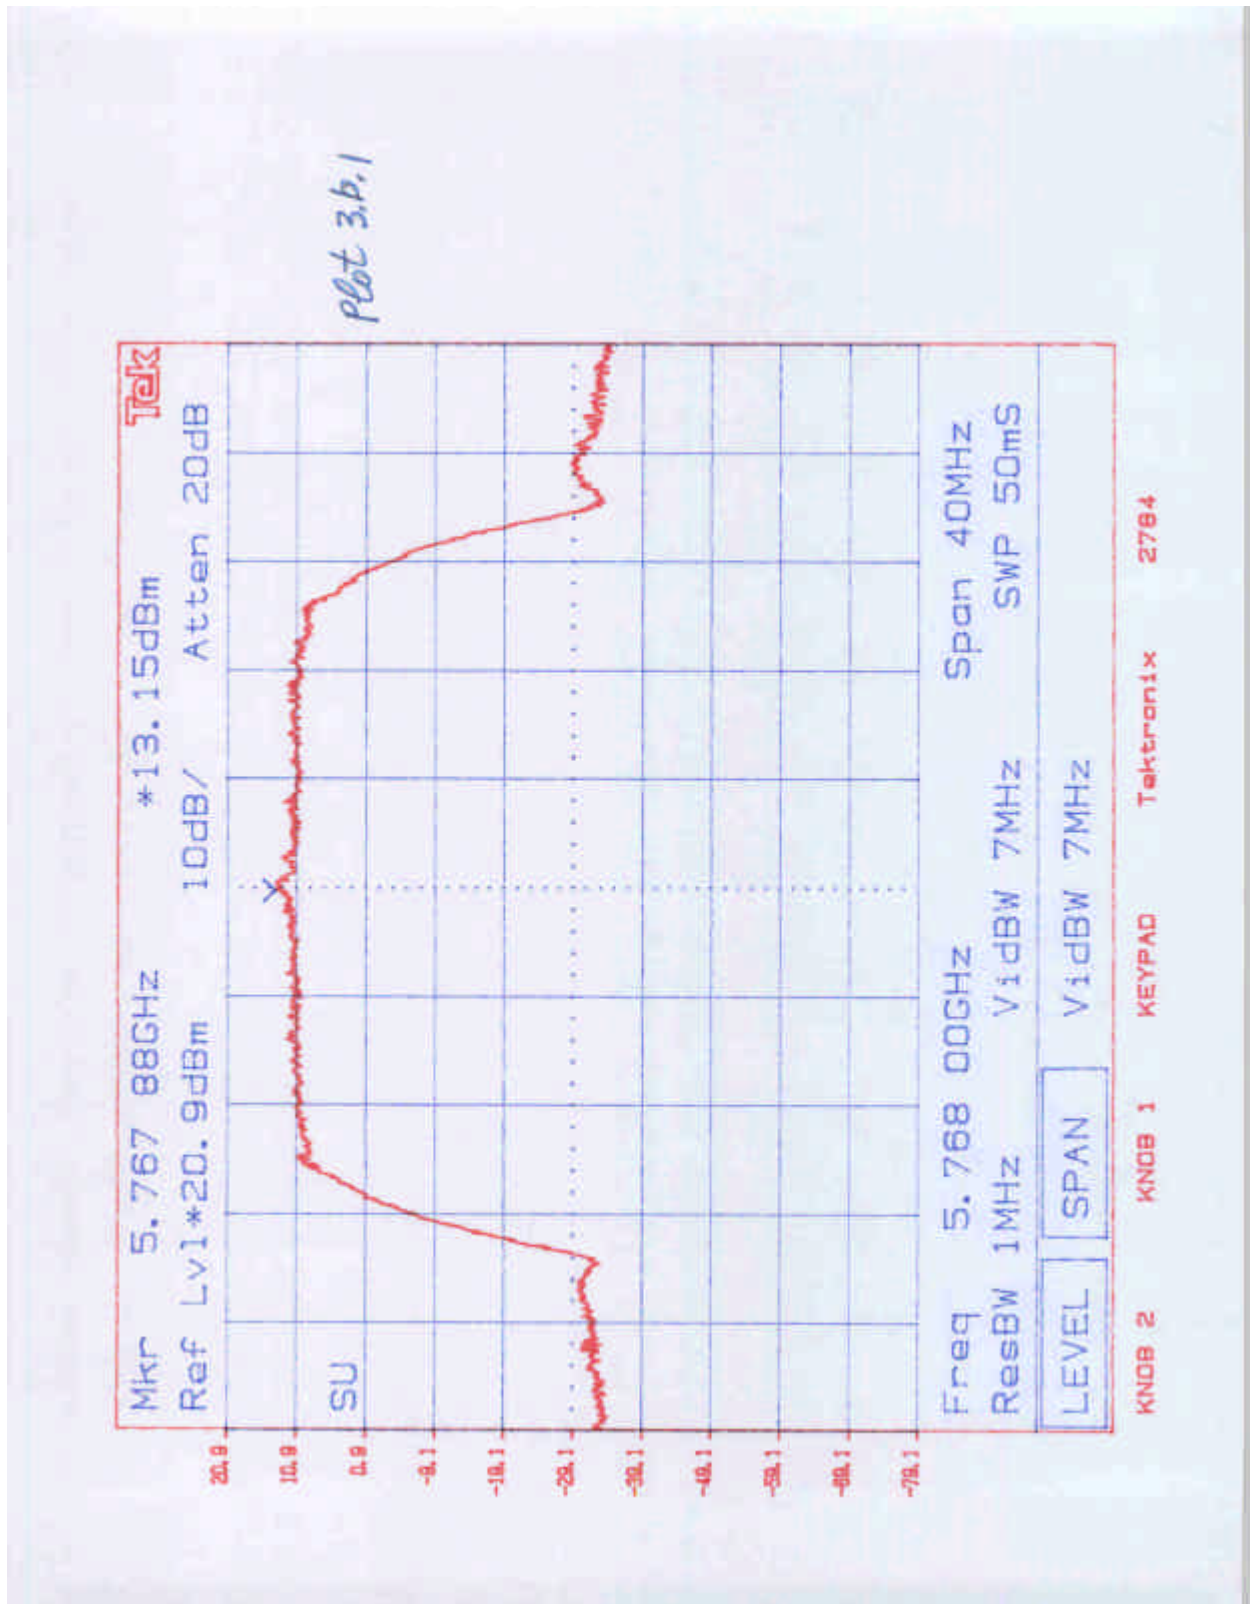

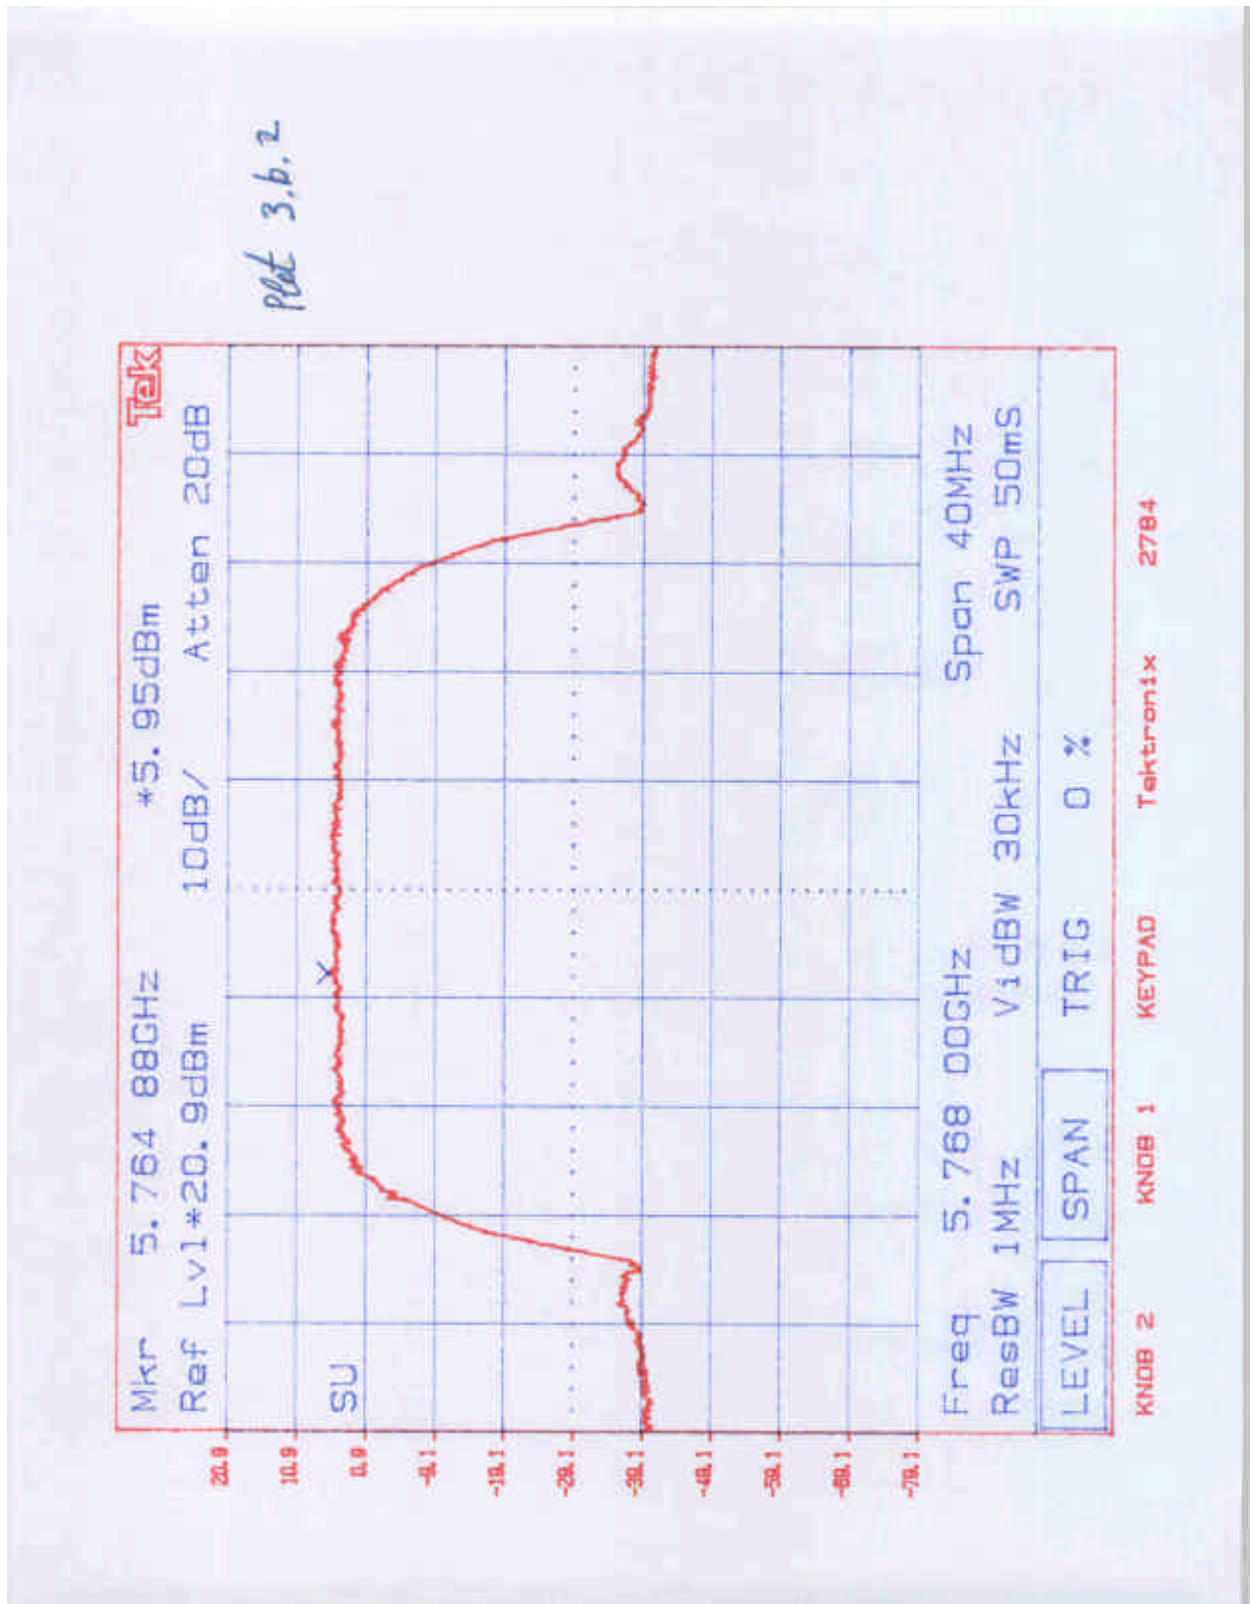


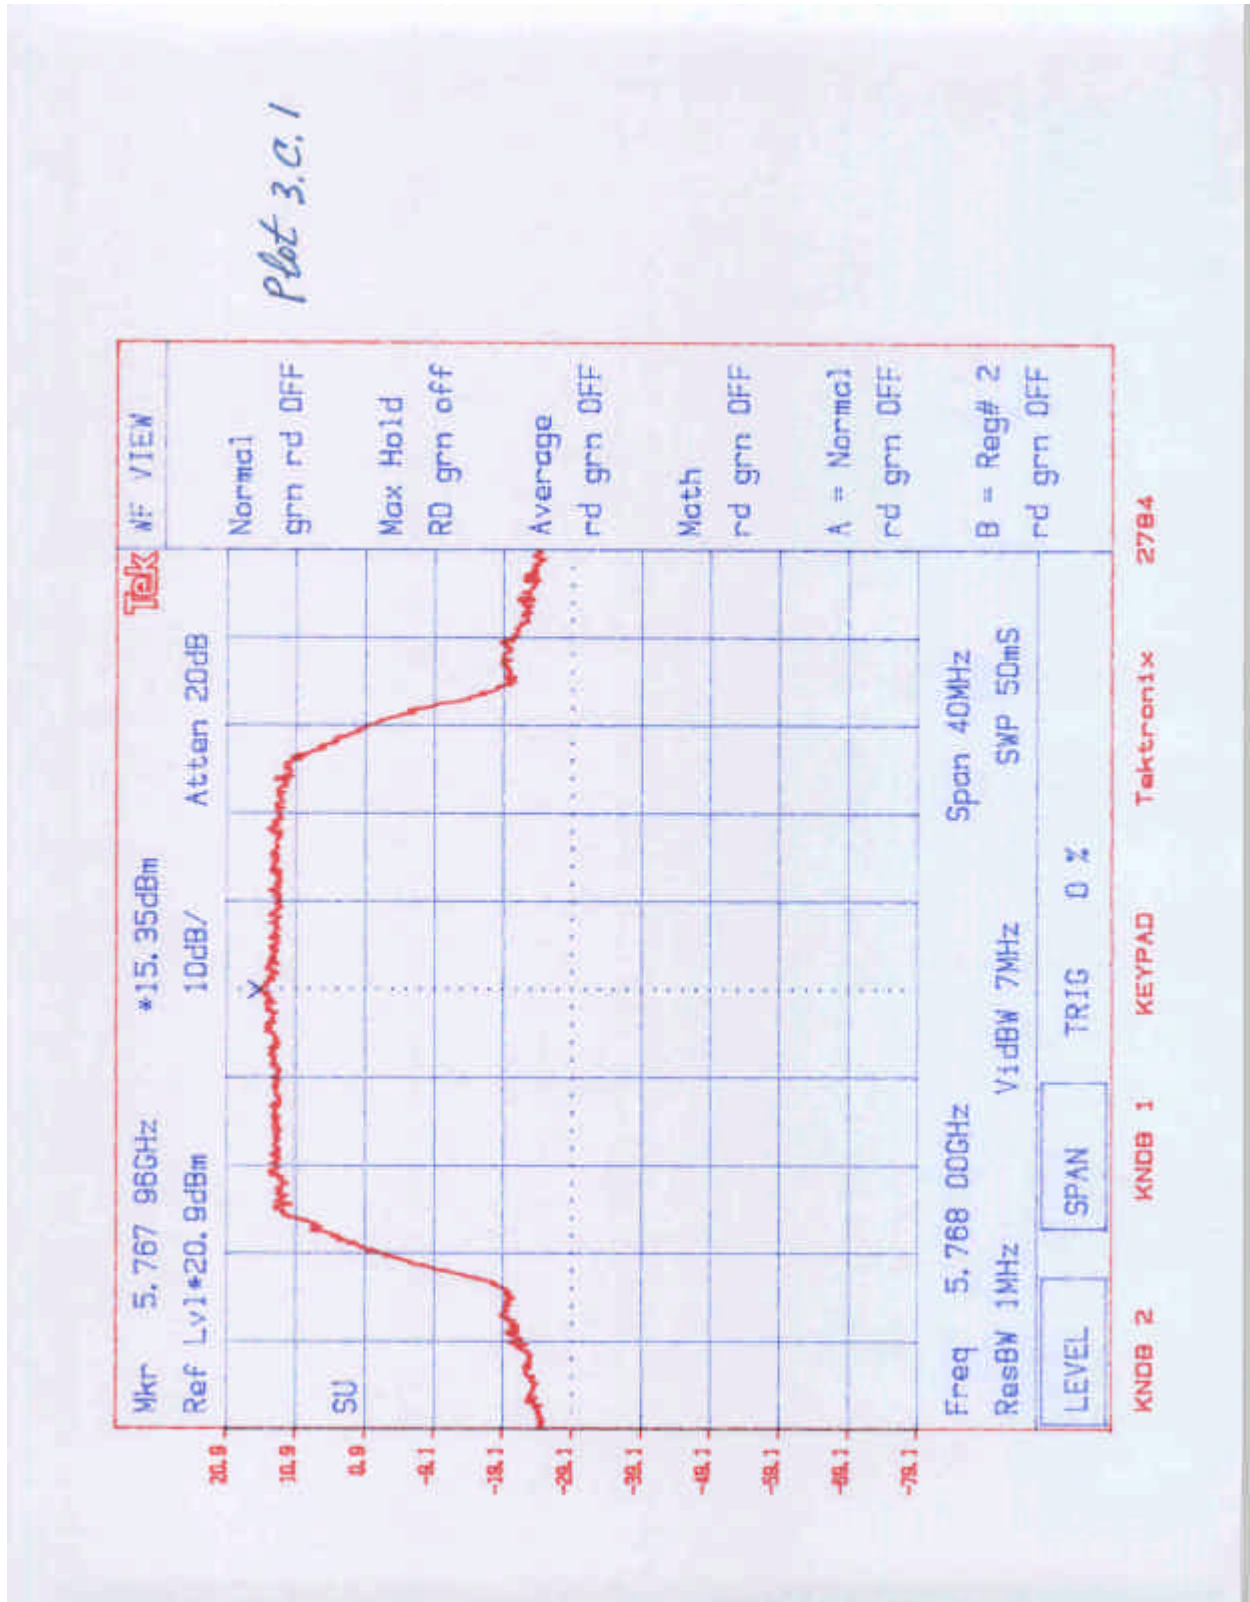

Proxim Corporation, Model No: 40100-XXX

FCC ID: HZB-US58-S60


Date of Test: September 20 to 23, 2001

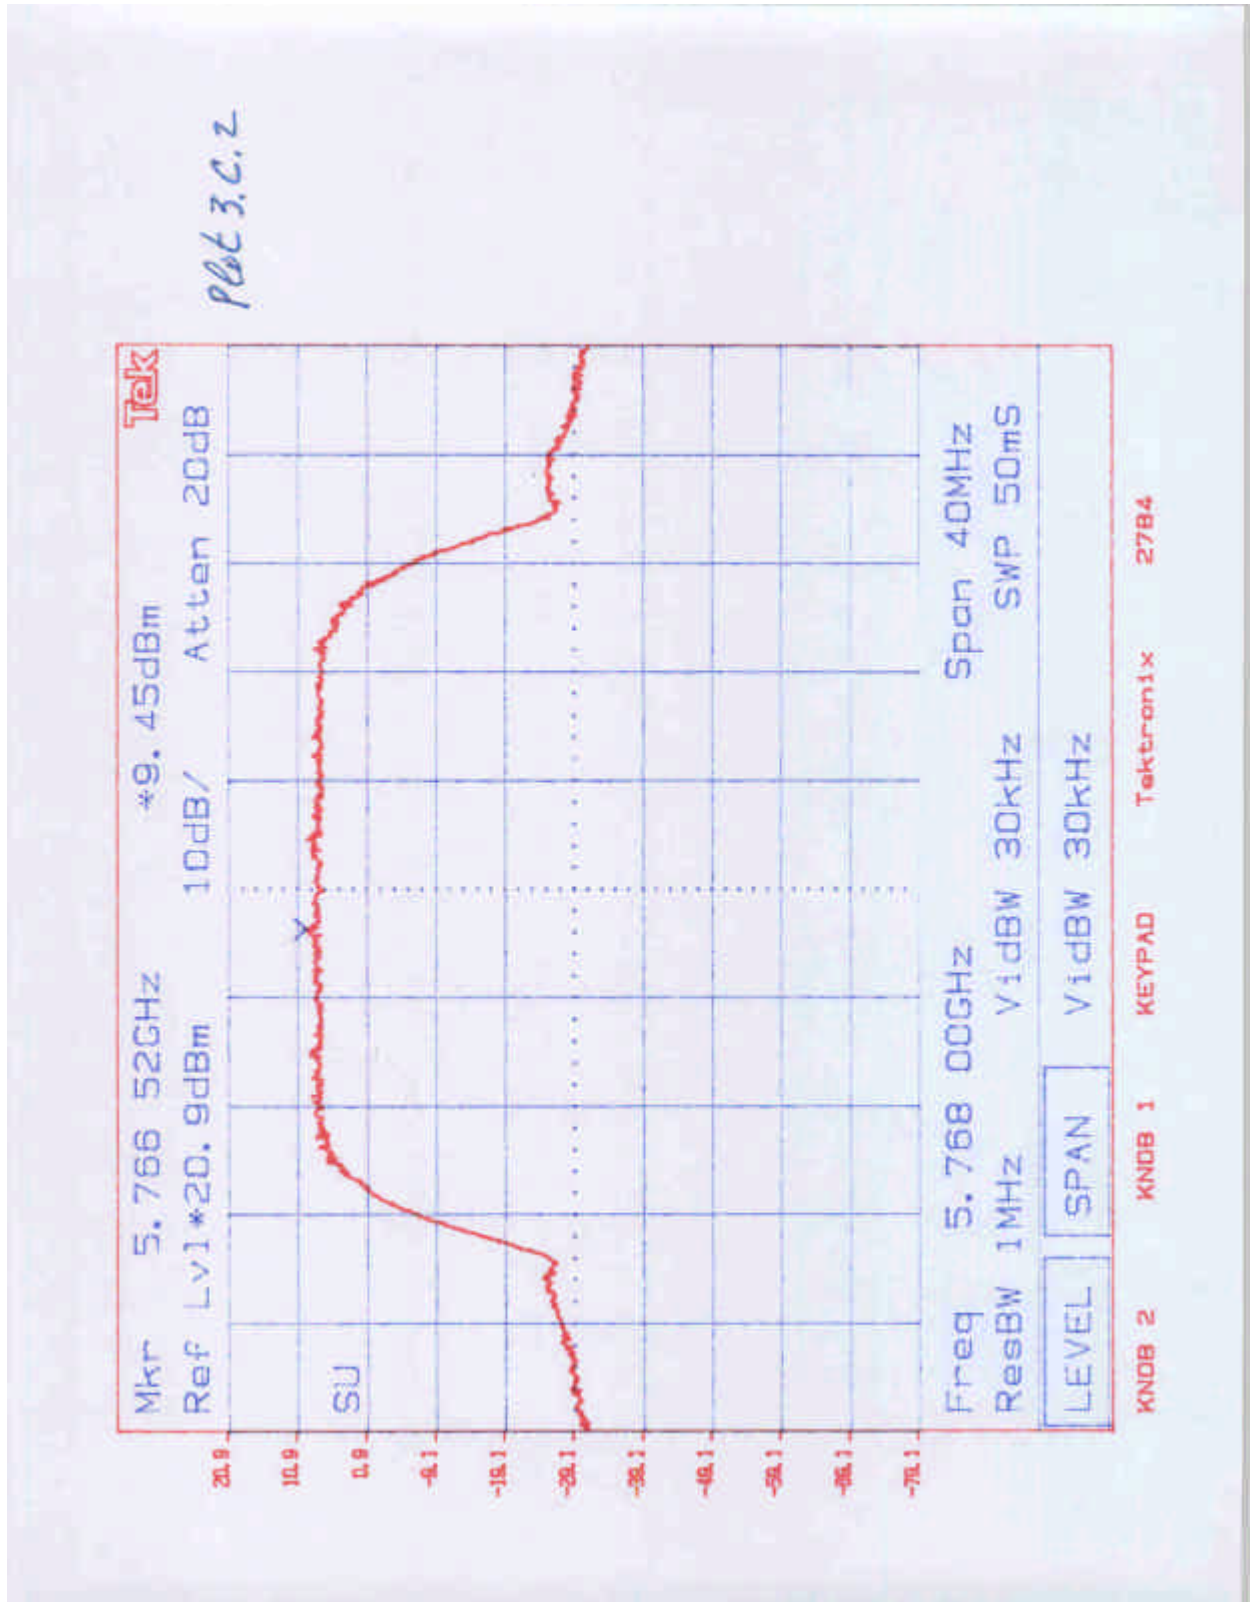

Proxim Corporation, Model No: 40100-XXX

FCC ID: HZB-US58-S60

Date of Test: September 20 to 23, 2001

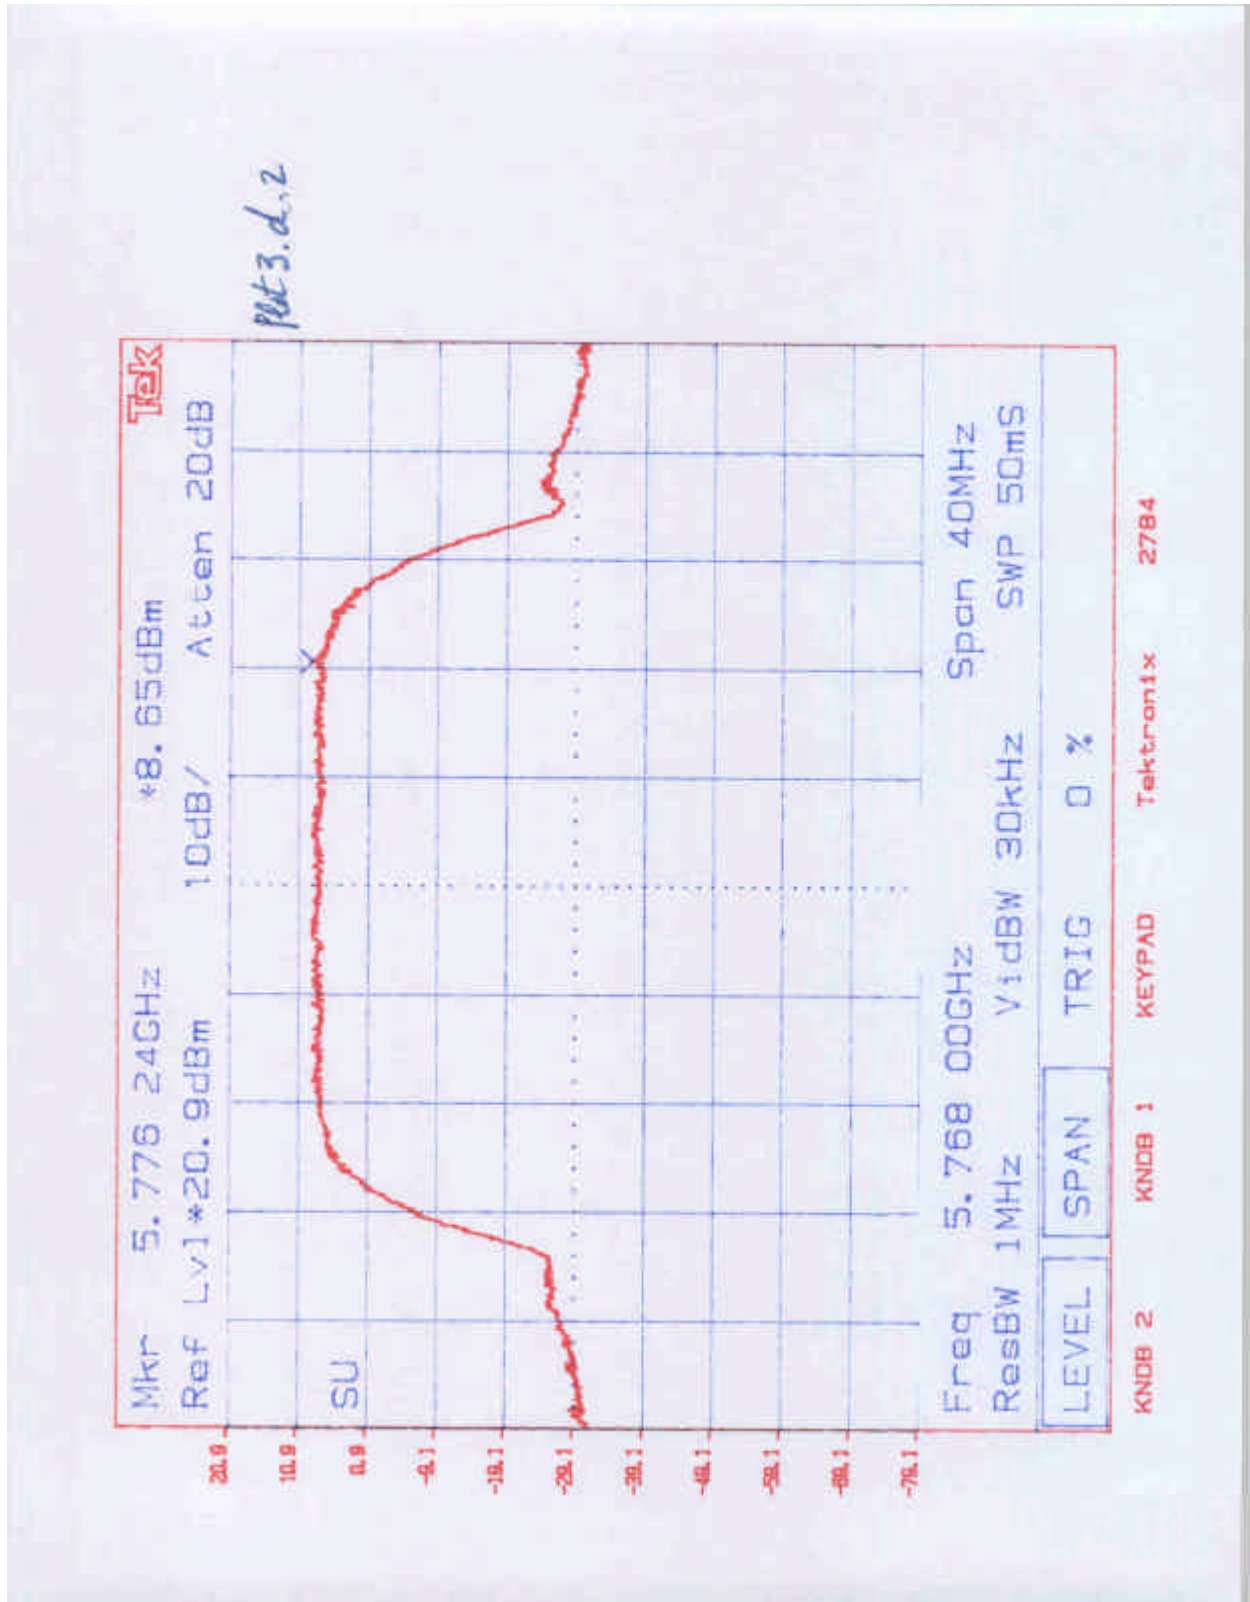

Proxim Corporation, Model No: 40100-XXX
FCC ID: HZB-US58-S60**Date of Test: September 20 to 23, 2001****4.5 Out-of-Band Conducted Emissions**
FCC Rule 15.407(b)**Requirement:**

For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.

For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed and EIRP of -27 dBm/MHz.

The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

Procedure:

Spectrum Analyzer was connected to the output of the EUT. For measurements above 1 GHz, the Resolution Bandwidth was set to 1 MHz and the Video Bandwidth was set to 7 MHz; the Spectrum Analyzer was set to perform average by sampling, 100 sweeps was used. For measurements below 1 GHz, the Resolution Bandwidth and the Video Bandwidth were set 100 kHz. Several plots were made in the frequency range from 30 MHz to 40 GHz.

The tests were performed for three modulation: QAM16, QAM8, QPSK R $3/4$.

Note: QPSK R $3/4$ is the worst case for QPSK R $3/4$ and QPSK R $1/2$.

Result:

Refer to the following plots (on the next pages) for out-of-band conducted emissions data.

The EUT complies with out-of-band conducted emissions limits, calculated as EIRP Limit minus Antenna Gain (21 dBi):

- 48 dBm/MHz, for frequencies 30 - 5715 MHz,
- 48 dBm/MHz, for frequencies 5835 - 40 GHz,
- 38 dBm/MHz, for frequencies 5715 - 5725 MHz,
- 38 dBm/MHz, for frequencies 5825 - 5835 MHz,

except for frequencies 731.3 MHz, 759.4 MHz, 801.2 MHz (see plots: 4.c1, 4.d1, 4.e1, 4.f1, 4.g1, 4.h1, 4.i1).

On those frequencies the antenna gain is unknown, therefore radiated emission tests were performed (see test data in section 4.6).

Proxim Corporation, Model No: 40100-XXX
FCC ID: HZB-US58-S60

Date of Test: September 20 to 23, 2001

15.407((b), Out-of-Band emissions		
4.a.1 – 4.a.8 *	Ch 0	QAM16
4.b.1 – 4.b.8 *	Ch 2	QAM16
4.c.1 – 4.c.9 *	Ch 5	QAM16
4.d.1 – 4.d.8 **	CH 0	QAM8
4.e.1 – 4.e.7 **	CH 2	QAM8
4.f.1 – 4.f.10 **	Ch 5	QAM8
4.g.1 – 4.g.10 ***	Ch 0	QPSK R $\frac{3}{4}$
4.h.1 – 4.h.7 ***	Ch 2	QPSK R $\frac{3}{4}$
4.i.1 – 4.i.11 ***	Ch 5	QPSK R $\frac{3}{4}$

* See Appendix A for plots

** See Appendix B for plots

*** See Appendix C for plots

Proxim Corporation, Model No: 40100-XXX
FCC ID: HZB-US58-S60**Date of Test: September 20 to 23, 2001**4.6 Radiated Emissions
FCC Rules 15.109, 15.209, 15.205Procedure

Radiated emission measurements were performed from 30 MHz to 40,000 MHz. Spectrum Analyzer Resolution Bandwidth is 100 kHz or greater for frequencies 30 MHz to 1000 MHz, 1 MHz - for frequencies above 1000 MHz.

The EUT is placed on the wooden turntable. If the EUT attaches to peripherals, they are connected and operational (as typical as possible). During testing, all cables were manipulated to produce worst case emissions. The signal is maximized through rotation. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. All readings are extrapolated back to the equivalent three-meter reading using inverse scaling with distance.

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included. All measurements were performed with peak detection unless otherwise specified.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where FS = Field Strength in dB μ V/m

RA = Receiver Amplitude (including preamplifier) in dB μ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

Where FS = Field Strength in dB μ V/m

RR = RA - AG in dB μ V

LF = CF + AF in dB

Assume a receiver reading of 52.0 dB μ V is obtained. The antennas factor of 7.4-dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving field strength of 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 52.0 dB μ V

AF = 7.4 dB

CF = 1.6 dB

AG = 29.0 dB

FS = RR + LF

RR = 23.0 dB μ V

LF = 9.0 dB

Proxim Corporation, Model No: 40100-XXX

FCC ID: HZB-US58-S60

Date of Test: September 20 to 23, 2001

$FS = 23 + 9 = 32 \text{ dB}\mu\text{V/m}$

Level in $\mu\text{V/m}$ = Common Antilogarithm $[(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$

Result

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

Proxim Corporation, Model No: 40100-XXX
FCC ID: HZB-US58-S60

Date of Test: September 20 to 23, 2001

Radiated Emissions Test Data

Company:	Proxim Cor.	Model #:	40100-XXX	Standard	FCC § 15.407
EUT:	PMP Subscriber unit	S/N #:		Limits	11
Project #:	3008928	Test Date:	Sep 19, 2001	Test Distance	3 meters
Test Mode:	Tx @5740.40MHz	Engineer:	Suresh K	Duty Relaxation	0 dB

	Antenna Used			Pre-Amp Used			Cable Used			Transducer Used
Number:	8	21	22	0	13	10	21	0	0	0
Model:	EMCO 3115	3160-9	3160-10	None	ACO/400	AFT18855	Grn	None	None	None

Frequency	Reading	Detector	Ant	Amp.	Ant. Pol.	Ant. Factor	Pre-Amp	Insert. Loss	D. C. F.	Net	Limit @3m	Margin
MHz	dB(μV)	P/A/Q	#	#	H/V	dB(1/m)	dB	dB	dB	dB(μV/m)	dB(μV/m)	dB
5740.40E+0	81.7	Peak	8	0	H	36.6	0.0	3.7	0.0	122.0	-	-
5740.40E+0	66.2	Ave.	8	0	H	36.6	0.0	3.7	0.0	106.5	-	-
1.15E+4	38.0	Peak	8	10	H	40.4	39.9	5.6	0.0	44.1	74.0	-29.9
1.15E+4	27.9	Ave.	8	10	H	40.4	39.9	5.6	0.0	34.0	54.0	-20.0
1.72E+4	38.5	Peak	8	10	H	42.2	38.8	7.5	0.0	49.4	74.0	-24.6
1.72E+4	28.5	Ave.	8	10	H	42.2	38.8	7.5	0.0	39.4	54.0	-14.6
2.30E+4	39.9 *	Peak	21	13	H	40.4	23.3	8.5	-9.5	56.0	74.0	-18.0
2.30E+4	28.2 *	Ave.	21	13	H	40.4	23.3	8.5	-9.5	44.3	54.0	-9.7
2.87E+4	37.3 *	Peak	22	13	H	43.4	24.2	9.2	-9.5	56.2	74.0	-17.8
2.87E+4	27.5 *	Ave.	22	13	H	43.4	24.2	9.2	-9.5	46.4	54.0	-7.6
3.44E+4	43.6 *	Peak	22	13	H	43.6	25.9	10.0	-9.5	64.5	74.0	-9.5
3.44E+4	33.1 *	Ave.	22	13	H	43.6	25.9	10.0	-9.5	51.3	54.0	-2.7

Notes:	a) D.C.F.:Distance Correction Factor
	b) Insert. Loss (dB) = Cable A + Cable B + Cable C .
	c) Net (dB) = Reading + Antenna Factor - Pre-amp + Insert. Loss - Duty Relaxation (transmitter only).
	d) Negative signs (-) in Margin column signify levels below the limits.
	e) All other emissions not reported are below the equipment noise floor which is at least 3 dB below the limits.
	f) Measurements above 20 GHz were made at 1 m distance
	g) * noise floor

Proxim Corporation, Model No: 40100-XXX
FCC ID: HZB-US58-S60

Date of Test: September 20 to 23, 2001

Radiated Emissions Test Data

Company:	Proxim Cor.	Model #:	40100-XXX	Standard	FCC § 15.407
EUT:	PMP Subscriber unit	S/N #:		Limits	11
Project #:	3008928	Test Date:	Sep 19, 2001	Test Distance	3 meters
Test Mode:	Transmitter@5768.0MHz	Engineer:	Suresh K	Duty Relaxation	0 dB

	Antenna Used			Pre-Amp Used			Cable Used			Transducer Used	
Number:	22	8	21	8	10	13	21	0	0	0	
Model:	3160-10	EMCO 3115	3160-9	CDI P1000	AFT18855	ACO/400	Grn	None	None	None	

Frequency	Reading	Detector	Ant	Amp	Ant. Pol.	Ant. Factor	Pre-Amp	Insert. Loss	D. C. F.	Net	Limit @3m	Margin
MHz	dB(μV)	P/A/Q	#	#	H/V	dB(1/m)	dB	dB	dB	dB(μV/m)	dB(μV/m)	dB
5768.06E+0	82.9	Peak	8	0	H	36.6	0.0	3.7	0.0	123.2	-	-
5768.06E+0	69.8	Ave.	8	0	H	36.6	0.0	3.7	0.0	110.1	-	-
1.15E+4	44.2	Peak	8	10	H	40.4	39.7	5.8	0.0	50.7	74.0	-23.3
1.15E+4	32.5	Ave.	8	10	H	40.4	39.7	5.8	0.0	39.0	54.0	-15.0
1.73E+4	39.4	Peak	8	10	H	42.2	38.8	7.5	0.0	50.3	74.0	-23.7
1.73E+4	28.0	Ave.	8	10	H	42.2	38.8	7.5	0.0	38.9	54.0	-15.1
2.31E+4	39.1 *	Peak	21	13	H	40.4	23.3	8.5	-9.5	55.2	74.0	-18.8
2.31E+4	28.3 *	Ave.	21	13	H	40.4	23.3	8.5	-9.5	44.4	54.0	-9.6
2.88E+4	36.5 *	Peak	22	13	H	43.4	24.2	9.2	-9.5	55.4	74.0	-18.6
2.88E+4	26.7 *	Ave.	22	13	H	43.4	24.2	9.2	-9.5	45.6	54.0	-8.4
3.46E+4	42.0 *	Peak	22	13	H	43.6	23.8	10.0	-9.5	62.3	74.0	-11.7
3.46E+4	31.7 *	Ave.	22	13	H	43.6	23.8	10.0	-9.5	52.0	54.0	-2.0

Notes:

- D.C.F.:Distance Correction Factor
- Insert. Loss (dB) = Cable A + Cable B + Cable C .
- Net (dB) = Reading + Antenna Factor - Pre-amp + Insert. Loss - Duty Relaxation (transmitter only).
- Negative signs (-) in Margin column signify levels below the limits.
- All other emissions not reported are below the equipment noise floor which is at least 3 dB below the limits.
- Measurements above 20 GHz were made at 1 m distance
- * noise floor

Proxim Corporation, Model No: 40100-XXX
FCC ID: HZB-US58-S60

Date of Test: September 20 to 23, 2001

Radiated Emissions Test Data

Company:	Proxim Cor.	Model #:	40100-XXX	Standard	FCC § 15.407
EUT:	PMP Subscriber unit	S/N #:		Limits	11
Project #:	3008928	Test Date:	Sep 19, 2001	Test Distance	3 meters
Test Mode:	Transmitter@5809.56MHz	Engineer:	Suresh K	Duty Relaxation	0 dB

	Antenna Used			Pre-Amp Used			Cable Used			Transducer Used
Number:	22	8	21	8	10	13	21	0	0	0
Model:	3160-10	EMCO 3115	3160-9	CDI_P1000	AFT18855	ACO/400	Gm	None	None	None

Frequency	Reading	Detector	Ant	Amp	Ant. Pol.	Ant. Factor	Pre-Amp	Insert. Loss	D. C. F.	Net	Limit @3m	Margin
MHz	dB(μV)	P/A/Q	#	#	H/V	dB(1/m)	dB	dB	dB	dB(μV/m)	dB(μV/m)	dB
5809.56E+0	78.9	Peak	8	0	H	36.6	0.0	3.7	0.0	119.2	-	-
5809.56E+0	65.4	Ave.	8	0	H	36.6	0.0	3.7	0.0	105.7	-	-
1.16E+4	42.9	Peak	8	10	H	40.4	39.7	5.8	0.0	49.4	74.0	-24.6
1.16E+4	32.1	Ave.	8	10	H	40.4	39.7	5.8	0.0	38.6	54.0	-15.4
1.74E+4	38.9	Peak	8	10	H	42.2	38.8	7.5	0.0	49.8	74.0	-24.2
1.74E+4	28.2	Ave.	8	10	H	42.2	38.8	7.5	0.0	39.1	54.0	-14.9
2.32E+4	39.1 *	Peak	21	13	H	40.4	23.3	8.5	-9.5	55.2	74.0	-18.8
2.32E+4	27.2 *	Ave.	21	13	H	40.4	23.3	8.5	-9.5	43.3	54.0	-10.7
2.90E+4	36.5 *	Peak	22	13	H	43.5	25.9	9.2	-9.5	53.8	74.0	-20.2
2.90E+4	26.4 *	Ave.	22	13	H	43.5	25.9	9.2	-9.5	43.7	54.0	-10.3
3.49E+4	42.0 *	Peak	22	13	H	43.6	23.8	10.0	-9.5	62.3	74.0	-11.7
3.49E+4	31.4 *	Ave.	22	13	H	43.6	23.8	10.0	-9.5	51.7	54.0	-2.3

Notes:	a) D.C.F.:Distance Correction Factor
	b) Insert. Loss (dB) = Cable A + Cable B + Cable C .
	c) Net (dB) = Reading + Antenna Factor - Pre-amp + Insert. Loss - Duty Relaxation (transmitter only).
	d) Negative signs (-) in Margin column signify levels below the limits.
	e) All other emissions not reported are below the equipment noise floor which is at least 3 dB below the limits.
	f) Measurements above 20 GHz were made at 1 m distance
	g) * noise floor

Proxim Corporation, Model No: 40100-XXX
FCC ID: HZB-US58-S60

Date of Test: September 20 to 23, 2001

Job No.: 3008928
Company: Proxim Corporation
Model: PMP Subscriber Unit
Test Mode: Tx/Rx
Engineer: Ollie Moyrong
Date: September_18_2001

FCC Part 15.109 Class B Radiated Emissions

Frequency (MHz)	Antenna Location (m)	Antenna Polariz. (H/V)	Reading (dBuV)	Antenna Factor (dB/m)	Preamp gain (dB)	Dist. Corr. Factor (dB)	Cable Loss (dB)	Corrected Reading (dBuV/m)	Limit at 3 m (dBuV/m)	Margin (dB)
35.0	3.0	V	35.1	8.2	18.4	0.0	1.5	26.4	40.0	-13.6
35.4	3.0	V	38.6	8.2	18.4	0.0	1.5	29.9	40.0	-10.1
51.0	3.0	V	37.1	5.0	18.5	0.0	2.1	25.7	40.0	-14.3
56.8	3.0	V	34.3	5.7	18.5	0.0	2.1	23.6	40.0	-16.4
64.2	3.0	V	38.4	5.8	18.7	0.0	2.3	27.8	40.0	-12.2
64.8	3.0	V	39.7	5.8	18.7	0.0	2.3	29.1	40.0	-10.9
80.0	3.0	V	36.7	6.7	18.8	0.0	2.4	27.0	40.0	-13.0
103.4	3.0	V	27.0	7.2	19.0	0.0	2.7	17.9	43.5	-25.6
112.8	3.0	V	32.3	7.1	19.0	0.0	2.7	23.1	43.5	-20.4
731.3	3.0	V	31.9	20.7	32.0	0.0	3.5	24.1	46.0	-21.9
759.4	3.0	V	30.0	20.7	32.0	0.0	3.5	22.2	46.0	-23.8
801.2	3.0	V	32.0	20.7	32.0	0.0	3.5	24.2	46.0	-21.8

Notes: Negative signs (-) in the Margin column signify levels below the limit.
All readings are peak measurements.
All other emissions not reported are at least 10 dB below the applicable limits.
Frequency range of investigation is 30 MHz - 1 GHz.

Proxim Corporation, Model No: 40100-XXX


FCC ID: HZB-US58-S60

Date of Test: September 20 to 23, 2001

4.7 AC Line Conducted Emission
FCC Rule 15.207

AC line conducted emission test was performed according the ANSI C63.4 standard. The EUT was connected to DC Power Supply which was connected to AC Line through the LISNs.


For the test result, see attached plots.
The EUT passed by 2.5 dB

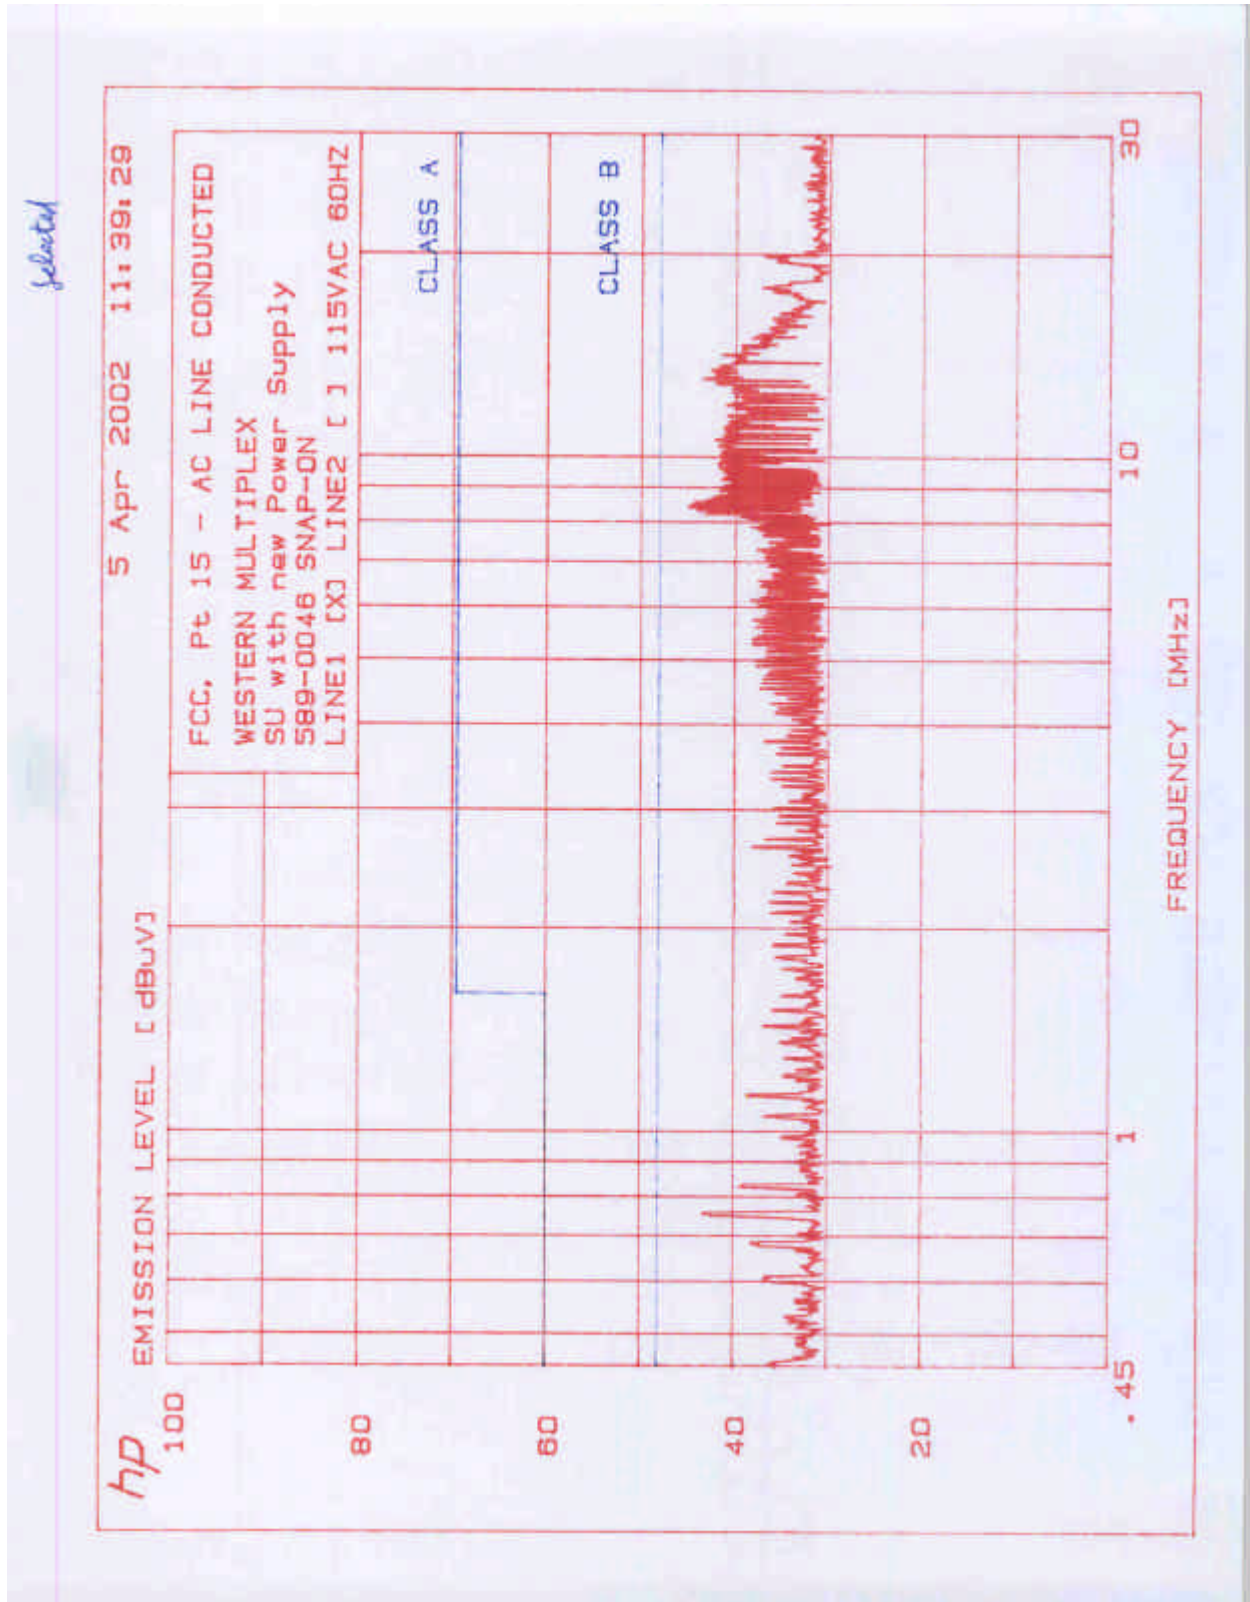



Proxim Corporation, Model No: 40100-XXX

FCC ID: HZB-US58-S60

Date of Test: September 20 to 23, 2001

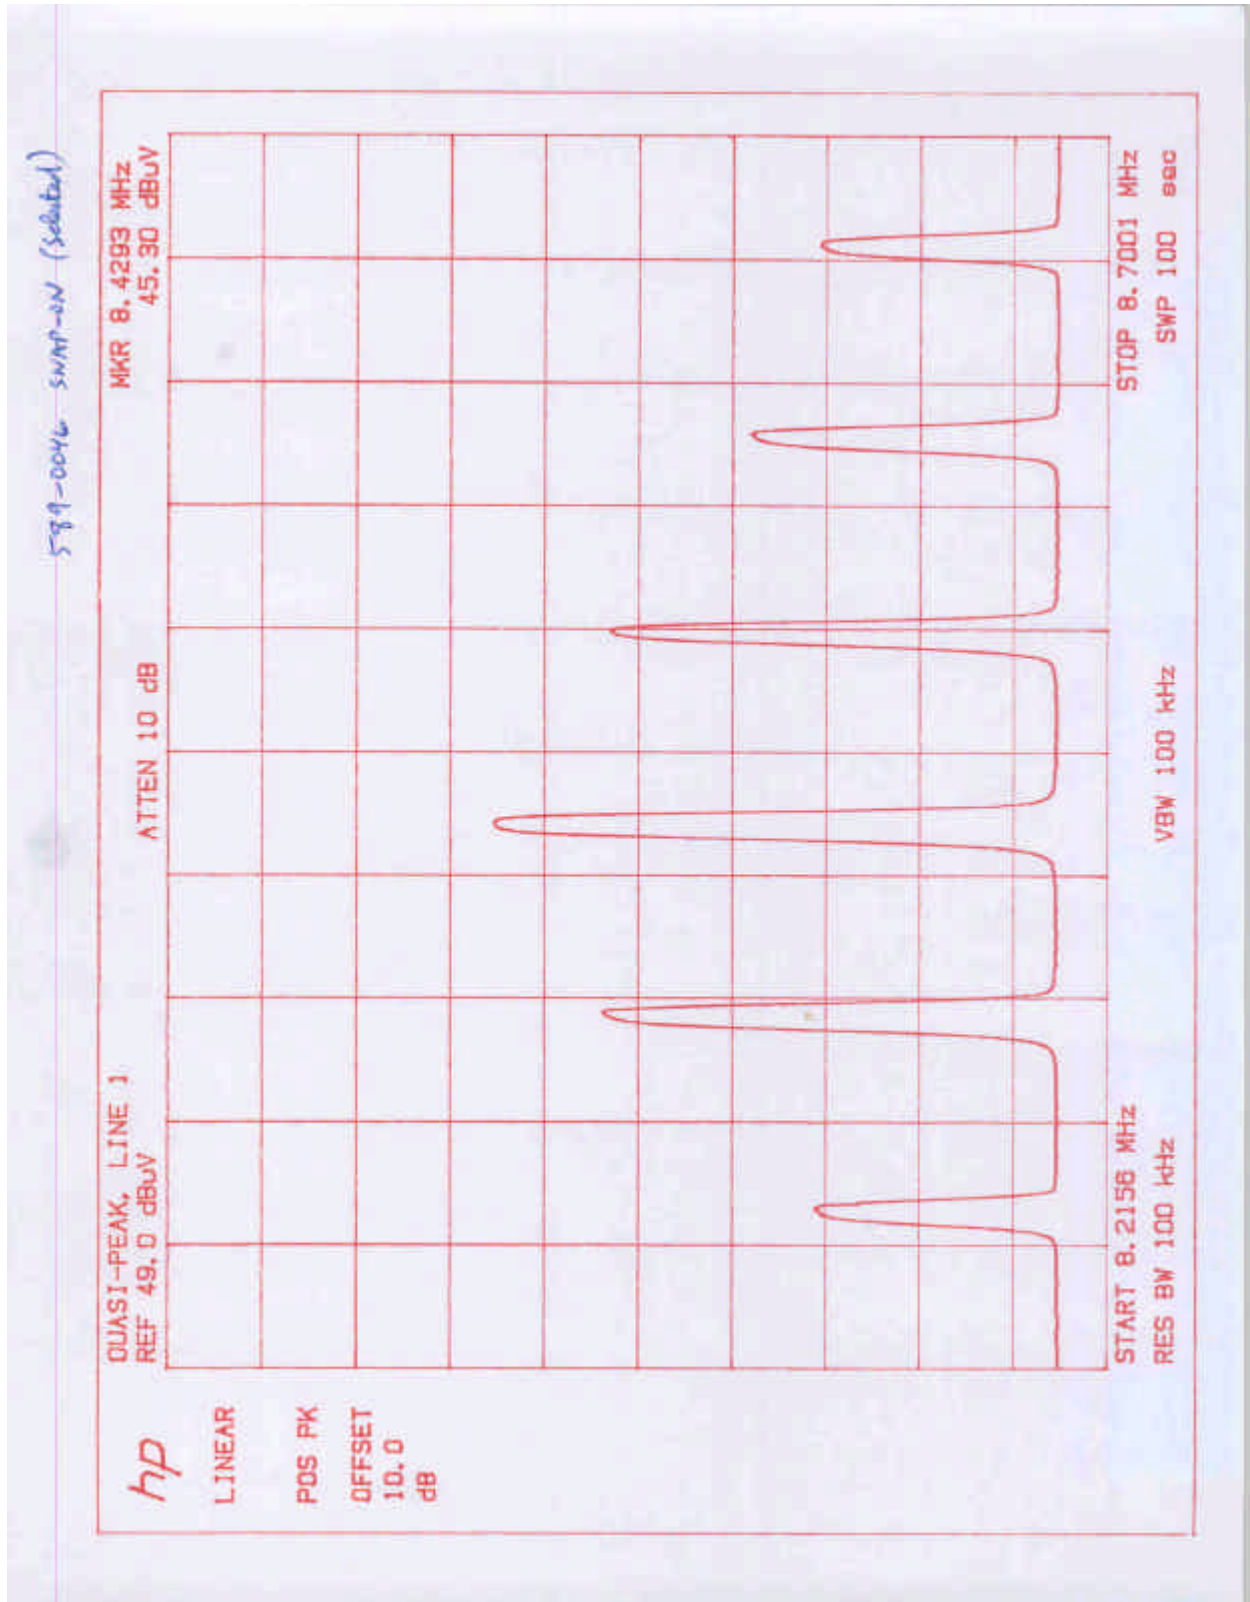

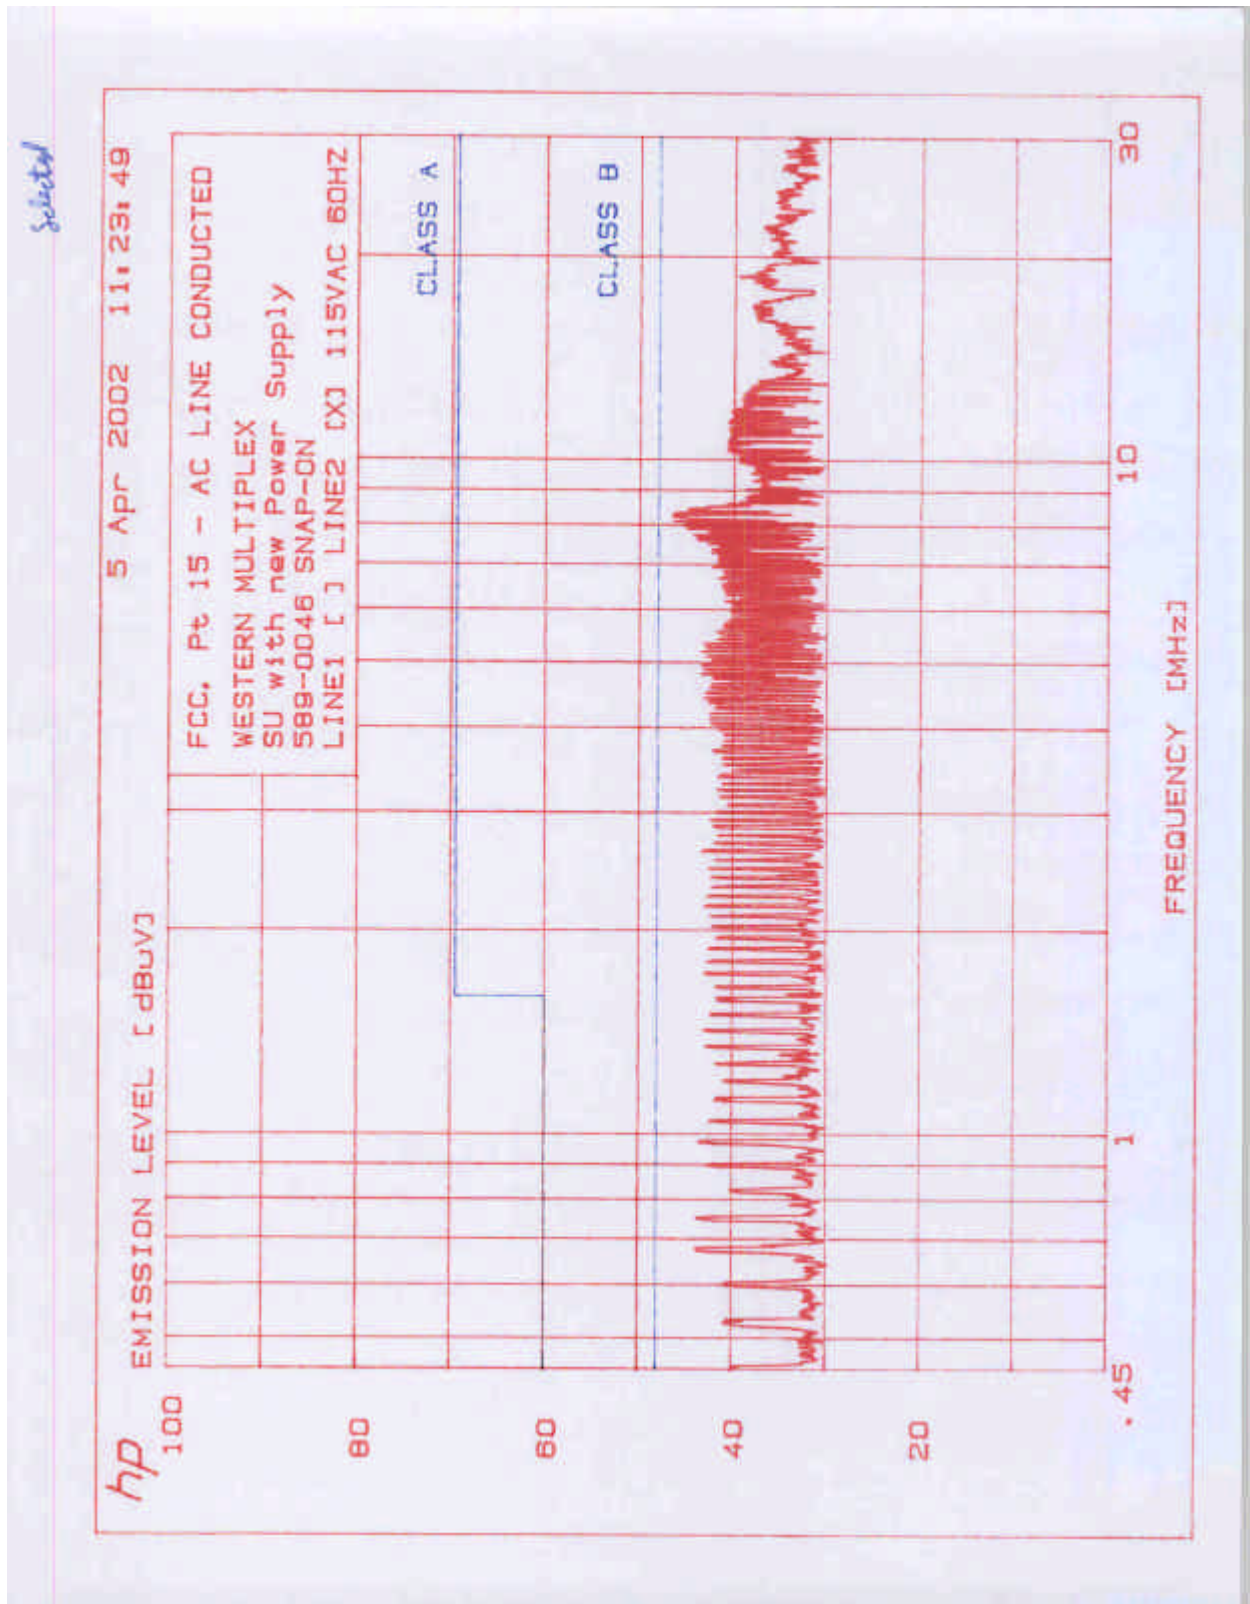

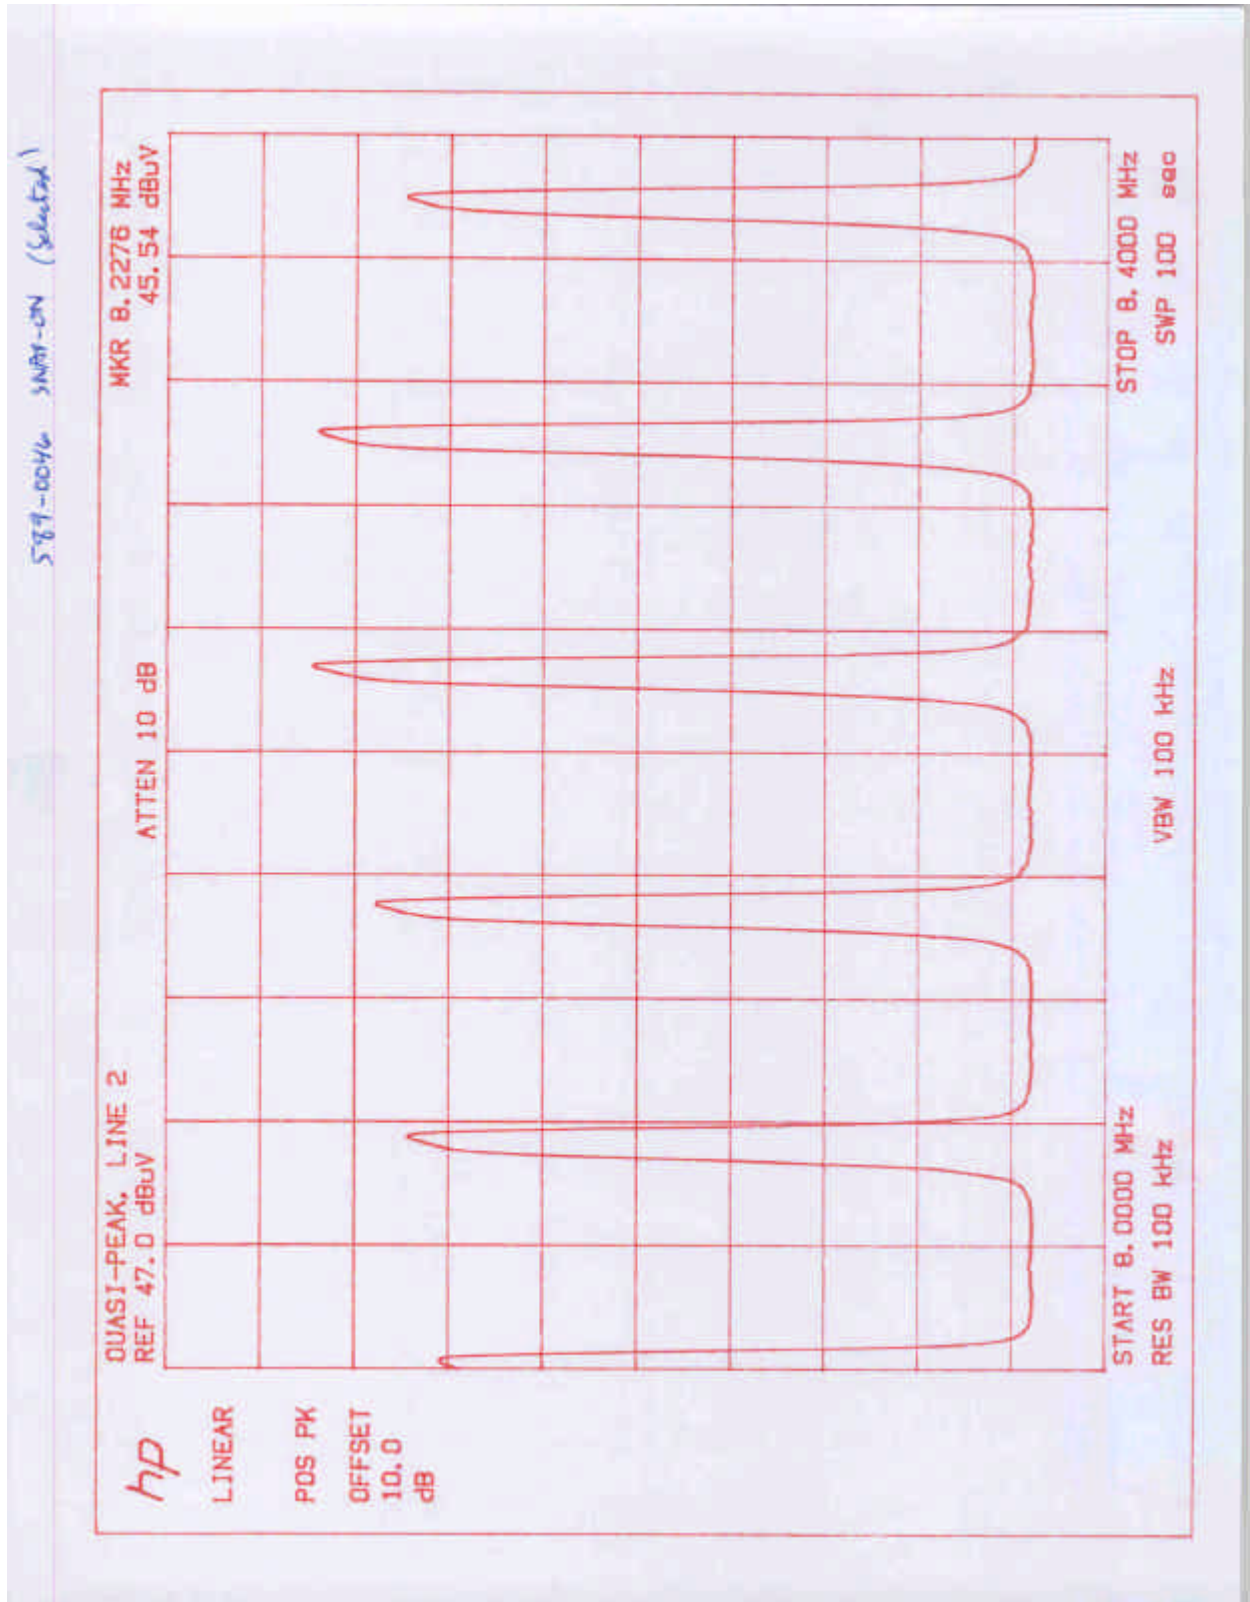

Proxim Corporation, Model No: 40100-XXX
FCC ID: HZB-US58-S60

Date of Test: September 20 to 23, 2001

5.0 List of Test Equipment

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. INTERVAL	CAL. DUE
Spectrum Analyzer w/85650 QP Adapter	Hewlett Packard	8566B	2416A00317 2043A00251	12	4/6/02
Spectrum Analyzer w/8650 QP Adapter	Hewlett Packard	8568B	1912A0053 2521A01021	12	2/23/02
Spectrum Analyzer	Tektronix	2784	B3020108	12	8/8/02
BI-Log Antenna	EMCO	3143	9509-1164	12	3/4/03
Double-ridged Horn Antenna	EMCO	3115	9107-3712	12	3/17/02
Horn Antenna	EMCO	3160-09	Not Labeled	#	#
Horn Antenna	EMCO	3160-10	Not Labeled	#	#
Pre-Amplifier	CDI	P950	ITS009	12	7/2/02
Pre-Amplifier	Sonoma Inst.	310	185634	12	4/25/02
Pre-Amplifier	CDI	P1000	N/A	12	10/06/01
Pre-Amplifier	Avantek	AFT-18855	8723H705	12	10/5/01
Pre-amplifier	CTT	ACO/400	47526	12	10/5/01
Power Meter	Hewlett Packard	8900D	3607U00673	12	8/8/02
LISN	FCC	FCC-LISN-50-50-M-H	2011	12	1/02/03

No Calibration Required

Proxim Corporation, Model No: 40100-XXX
FCC ID: HZB-US58-S60

Date of Test: September 20 to 23, 2001

6.0 Document History

Revision/ Job Number	Writer Initials	Date	Change
1.0 / 3008928	SS	September 20, 2001	Original document
2.0 / 3018893	DC	February 26, 2002	New FCC ID
	DC	April 20, 2002	Company Name

7.0 Appendix A

See file "Appendix A"

8.0 Appendix B

See file "Appendix B"

9.0 Appendix C

See file "Appendix C"

10.0 Appendix D

See file " Appendix D"