

FCC SAR TEST REPORT

FCC ID : I28-WYSBHVDXP
Equipment : WLAN/BTLE module
Brand Name : ZEBRA
Model Name : WYSBHVDXP
Applicant : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069, United States
Manufacturer : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069, United States
Standard : FCC 47 CFR Part 2 (2.1093)

The product was received on Jul. 07, 2023 and testing was started from Jul. 10, 2023 and completed on Jul. 28, 2023. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. EMC & Wireless Communications Laboratory

No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan



Table of Contents

1. Statement of Compliance	4
2. Guidance Applied	4
3. Equipment Under Test (EUT) Information	5
3.1 General Information	5
4. RF Exposure Limits	6
4.1 Uncontrolled Environment	6
4.2 Controlled Environment	6
5. Specific Absorption Rate (SAR)	7
5.1 Introduction	7
5.2 SAR Definition	7
6. System Description and Setup	8
6.1 Test Site Location	8
6.2 E-Field Probe	9
6.3 Data Acquisition Electronics (DAE)	9
6.4 Phantom	10
6.5 Device Holder	11
7. Measurement Procedures	12
7.1 Spatial Peak SAR Evaluation	12
7.2 Power Reference Measurement	13
7.3 Area Scan	13
7.4 Zoom Scan	14
7.5 Volume Scan Procedures	14
7.6 Power Drift Monitoring	14
8. Test Equipment List	15
9. System Verification	16
9.1 Tissue Verification	16
9.2 System Performance Check Results	17
10. WiFi/Bluetooth Output Power (Unit: dBm)	18
11. Antenna Location	23
12. SAR Test Results	26
12.1 Body SAR for ZQ610	27
12.2 Body SAR for ZQ620	28
12.3 Body SAR for ZQ630	29
12.4 Hand SAR for ZQ610	30
12.5 Hand SAR for ZQ620	32
12.6 Hand SAR for ZQ630	34
13. Simultaneous Transmission Analysis	36
13.1 Body Exposure Conditions for ZQ610	37
13.2 Body Exposure Conditions for ZQ620	37
13.3 Body Exposure Conditions for ZQ630	37
13.4 Hand Exposure Conditions for ZQ610	38
13.5 Hand Exposure Conditions for ZQ620	38
13.6 Hand Exposure Conditions for ZQ630	38
14. Uncertainty Assessment	39
15. References	39
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	



History of this test report

Report No.	Version	Description	Issued Date
FA0D2423-06	01	Initial issue of report	Oct. 23, 2023

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) for Zebra Technologies Corporation, WLAN/BTLE module, WYSBHVDXP, are as follows.

Equipment Class	Frequency Band		Highest SAR Summary		Highest Simultaneous Transmission 1g SAR (W/kg)	Highest Simultaneous Transmission 10g SAR (W/kg)
			Body (Separation 0mm)	Hand (Separation 0mm)		
			1g SAR (W/kg)	10g SAR (W/kg)		
DTS	WLAN	2.4GHz WLAN	0.62	0.53	0.84	0.60
NII		5GHz WLAN	0.49	0.30	0.75	0.57
DSS	2.4GHz Band	Bluetooth	0.02	0.07	0.02	0.07
Date of Testing:			2023/7/10 ~ 2023/7/28			

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Hand 10g SAR) specified in FCC 47 CFR part 2 (2.1093), and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Carlie Tsai

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02

3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	WLAN/BTLE module
Brand Name	ZEBRA
Model Name	WYSBHVDXP
FCC ID	I28-WYSBHVDXP
Wireless Technology and Frequency Range	WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
Mode	WLAN: 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
HW Version	Revision G
SW Version	17.68.01.p94
EUT Stage	Identical Prototype
Remark:	
1. The battery 1 and 2 only support in ZQ610 and 620, for ZQ610 and ZQ620 were using battery 1 to do full SAR tested, battery 2 spot check worst case found in battery1, the battery 3 only support in ZQ630.	

4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

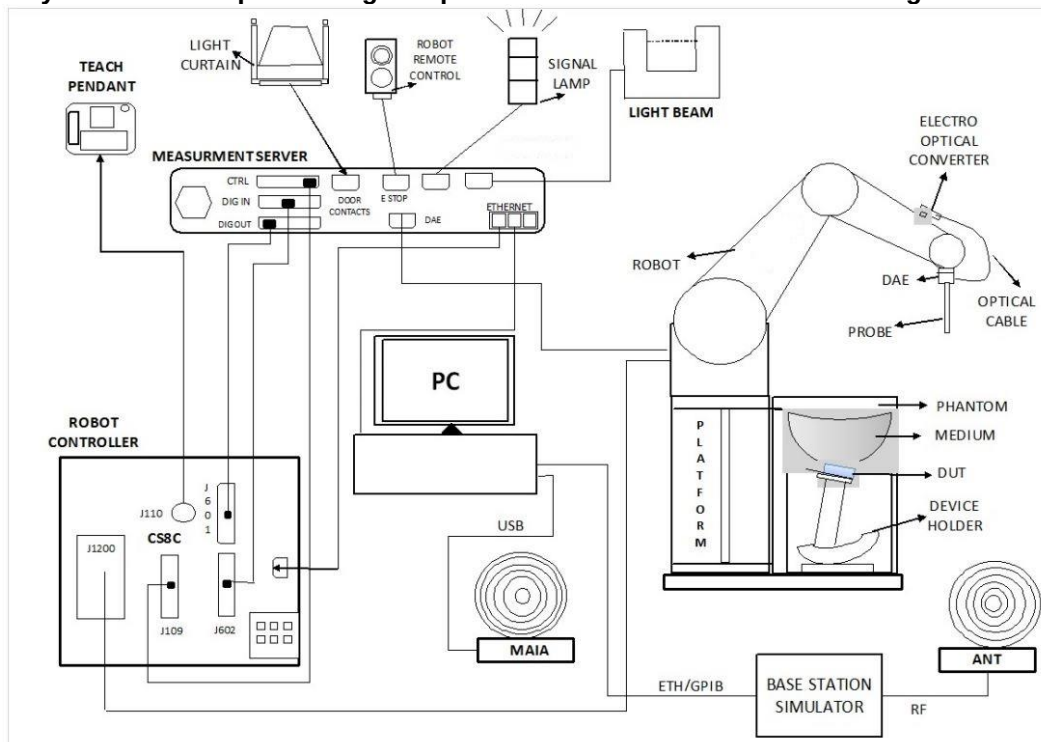

- The DASY system in SAR Configuration is shown above
- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running windows software and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.1 Test Site Location

The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Site	EMC & Wireless Communications Laboratory		Wensan Laboratory		
Test Site Location	TW1190 No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan		TW3786 No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan		
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	SAR16-HY
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	SAR17-HY

6.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

6.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

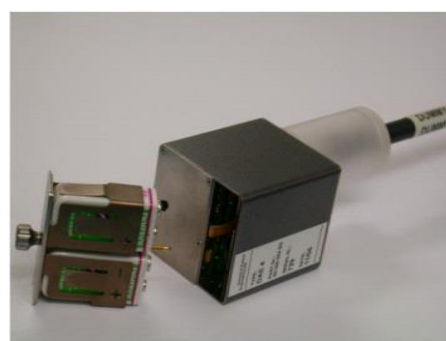


Fig 5.1 Photo of DAE

6.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

6.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

7. Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

7.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm $2 - 3$ GHz: ≤ 5 mm*	$3 - 4$ GHz: ≤ 5 mm* $4 - 6$ GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	$3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	$3 - 4$ GHz: ≤ 3 mm $4 - 5$ GHz: ≤ 2.5 mm $5 - 6$ GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	$3 - 4$ GHz: ≥ 28 mm $4 - 5$ GHz: ≥ 25 mm $5 - 6$ GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit ⁽²⁾	D2450V2	736	Aug. 17, 2021	Aug. 15, 2023
SPEAG	5GHz System Validation Kit	D5GHzV2	1128	Nov. 23, 2022	Nov. 22, 2023
SPEAG	5GHz System Validation Kit ⁽²⁾	D5GHzV2	1171	Apr. 20, 2021	Apr. 17, 2024
SPEAG	Data Acquisition Electronics	DAE4	1512	Mar. 20, 2023	Mar. 19, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	3728	Mar. 22, 2023	Mar. 21, 2024
RCPTWN	Thermometer	HTC-1	TM685-1	Mar. 21, 2023	Mar. 20, 2024
Keysight	5G Wireless Test Platform	E7515B	MY59321826	Apr. 26, 2023	Apr. 25, 2024
R&S	BT Base Station	CBT32	101136	Oct. 25, 2022	Oct. 24, 2023
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Oct. 12, 2022	Oct. 11, 2023
Keysight	ENA Network Analyzer	E5071C	MY46104758	Sep. 22, 2022	Sep. 21, 2023
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 28, 2022	Sep. 27, 2023
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3796	Jan. 13, 2023	Jan. 12, 2024
Anritsu	Power Meter	ML2495A	1419002	Aug. 16, 2022	Aug. 15, 2023
Anritsu	Power Sensor	MA2411B	1911176	Aug. 16, 2022	Aug. 15, 2023
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Jan. 10, 2023	Jan. 09, 2024
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 14, 2022	Oct. 13, 2023
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Warison	Directional Coupler	WCOU-10-50S-10	WR889BMC4B1	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

9. System Verification

9.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
2450	22.3	1.790	39.922	1.80	39.20	-0.56	1.84	± 5	2023/7/10
2450	22.2	1.775	39.806	1.80	39.20	-1.39	1.55	± 5	2023/7/13
2450	22.4	1.790	39.919	1.80	39.20	-0.56	1.83	± 5	2023/7/28
5250	22.2	4.878	36.370	4.71	35.95	3.57	1.17	± 5	2023/7/11
5250	22.2	4.635	35.997	4.71	35.95	-1.59	0.13	± 5	2023/7/12
5250	22.3	4.834	36.040	4.71	35.95	2.63	0.25	± 5	2023/7/14
5600	22.2	5.144	35.765	5.07	35.50	1.46	0.75	± 5	2023/7/11
5600	22.2	4.957	35.482	5.07	35.50	-2.23	-0.05	± 5	2023/7/12
5600	22.3	5.097	35.435	5.07	35.50	0.53	-0.18	± 5	2023/7/14
5750	22.2	5.369	35.447	5.22	35.35	2.85	0.27	± 5	2023/7/11
5750	22.2	5.128	35.221	5.22	35.35	-1.76	-0.36	± 5	2023/7/12
5750	22.3	5.321	35.117	5.22	35.35	1.93	-0.66	± 5	2023/7/14

9.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Test Site	Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
SAR05	2023/7/10	2450	50	D2450V2-736	EX3DV4 - SN3728	DAE4 Sn1512	2.540	54.200	50.8	-6.27	1.180	25.300	23.6	-6.72
SAR05	2023/7/13	2450	50	D2450V2-736	EX3DV4 - SN3728	DAE4 Sn1512	2.520	54.200	50.4	-7.01	1.170	25.300	23.4	-7.51
SAR05	2023/7/28	2450	50	D2450V2-736	EX3DV4 - SN3728	DAE4 Sn1512	2.590	54.200	51.8	-4.43	1.200	25.300	24	-5.14
SAR05	2023/7/11	5250	100	D5GHzV2-1171	EX3DV4 - SN3728	DAE4 Sn1512	7.800	80.300	78	-2.86	2.270	23.000	22.7	-1.30
SAR05	2023/7/12	5250	50	D5GHzV2-1128	EX3DV4 - SN3728	DAE4 Sn1512	3.660	77.900	73.2	-6.03	1.060	22.600	21.2	-6.19
SAR05	2023/7/14	5250	50	D5GHzV2-1171	EX3DV4 - SN3728	DAE4 Sn1512	3.690	80.300	73.8	-8.09	1.050	23.000	21	-8.70
SAR05	2023/7/11	5600	100	D5GHzV2-1171	EX3DV4 - SN3728	DAE4 Sn1512	8.450	83.400	84.5	1.32	2.440	23.700	24.4	2.95
SAR05	2023/7/12	5600	50	D5GHzV2-1128	EX3DV4 - SN3728	DAE4 Sn1512	3.670	80.100	73.4	-8.36	1.050	22.700	21	-7.49
SAR05	2023/7/14	5600	50	D5GHzV2-1171	EX3DV4 - SN3728	DAE4 Sn1512	3.960	83.400	79.2	-5.04	1.120	23.700	22.4	-5.49
SAR05	2023/7/11	5750	50	D5GHzV2-1171	EX3DV4 - SN3728	DAE4 Sn1512	3.730	80.400	74.6	-7.21	1.070	22.800	21.4	-6.14
SAR05	2023/7/12	5750	50	D5GHzV2-1128	EX3DV4 - SN3728	DAE4 Sn1512	3.580	79.300	71.6	-9.71	1.040	22.700	20.8	-8.37
SAR05	2023/7/14	5750	50	D5GHzV2-1171	EX3DV4 - SN3728	DAE4 Sn1512	3.730	80.400	74.6	-7.21	1.070	22.800	21.4	-6.14

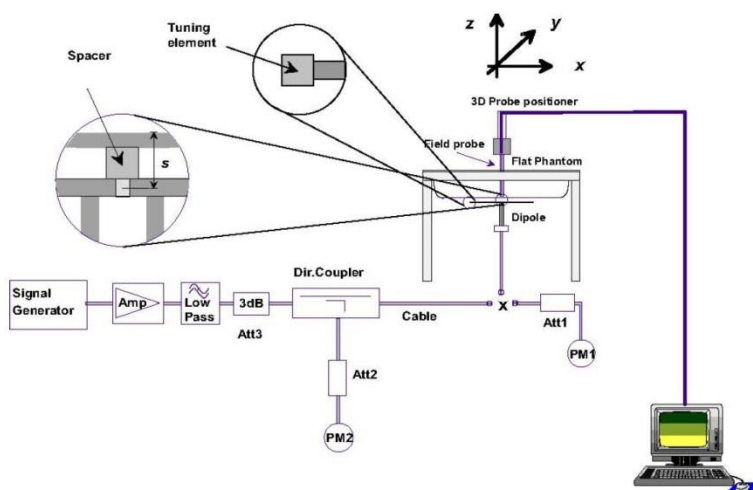


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

10. WiFi/Bluetooth Output Power (Unit: dBm)

General Note:

1. For each antenna, transmit power in SISO operation is larger than (or equal to) the power in MIMO operation, RF exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas operating in SISO mode.
2. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is $< 1.6\text{W/kg}$ and SAR peak to location ratio ≤ 0.04 , no additional SAR measurements for MIMO.
3. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, additional output power measurements were not necessary.
4. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
5. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
6. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
7. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is $\leq 0.4\text{ W/kg}$, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is $> 0.4\text{ W/kg}$, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is $\leq 0.8\text{ W/kg}$ or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is $> 0.8\text{ W/kg}$, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is $\leq 1.2\text{ W/kg}$ or all required channels are tested.

				Ant 1			Ant 2			Ant 1+2		
2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b 1Mbps	1	2412	16.40	17.00	100.00	16.50	17.00	100.00	Not Required	14.00	Not Required
		6	2437	16.30	17.00		16.40	17.00			14.00	
		11	2462	16.50	17.00		16.30	17.00			14.00	
		12	2467	16.90	17.00		16.80	17.00			14.00	
		13	2472	16.90	17.00		16.90	17.00			14.00	
	802.11g 6Mbps	1	2412	Not Required	17.00	Not Required	Not Required	17.00	Not Required		14.00	
		6	2437		17.00			17.00			14.00	
		11	2462		17.00			17.00			14.00	
		12	2467		17.00			17.00			14.00	
		13	2472		17.00			17.00			14.00	
	802.11n-HT20 MCS0	1	2412		17.00			17.00			14.00	
		6	2437		17.00			17.00			14.00	
		11	2462		17.00			17.00			14.00	
		12	2467		17.00			17.00			14.00	
		13	2472		17.00			17.00			14.00	
	802.11n-HT40 MCS0	3	2422		17.00			17.00			14.00	
		6	2437		17.00			17.00			14.00	
		9	2452		17.00			17.00			14.00	
		10	2457		17.00			17.00			14.00	
11		2462	17.00		17.00			14.00				
802.11ac-VHT20 MCS0	1	2412	17.00		17.00			14.00				
	6	2437	17.00		17.00			14.00				
	11	2462	17.00		17.00			14.00				
	12	2467	17.00		17.00			14.00				
	13	2472	17.00		17.00			14.00				
802.11ac-VHT40 MCS0	3	2422	17.00	17.00	14.00							
	6	2437	17.00	17.00	14.00							
	9	2452	17.00	17.00	14.00							
	10	2457	17.00	17.00	14.00							
	11	2462	17.00	17.00	14.00							

	Mode	Channel	Frequency (MHz)	Ant 1			Ant 2			Ant 1+2		
				Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	Not Required	15.00	Not Required	Not Required	14.00	Not Required	Not Required	13.00	Not Required
		40	5200		15.00			14.00			13.00	
		44	5220		15.00			14.00			13.00	
		48	5240		15.00			14.00			13.00	
	802.11n-HT20 MCS0	36	5180		15.00			14.00			13.00	
		40	5200		15.00			14.00			13.00	
		44	5220		15.00			14.00			13.00	
		48	5240		15.00			14.00			13.00	
	802.11n-HT40 MCS0	38	5190		15.00			14.00			13.00	
		46	5230		15.00			14.00			13.00	
	802.11ac-VHT20 MCS0	36	5180		15.00			14.00			13.00	
		40	5200		15.00			14.00			13.00	
		44	5220		15.00			14.00			13.00	
		48	5240		15.00			14.00			13.00	
	802.11ac-VHT40 MCS0	38	5190		15.00			14.00			13.00	
		46	5230		15.00			14.00			13.00	
	802.11ac-VHT80 MCS0	42	5210	14.90	15.00	95.69	13.30	14.00	95.26		13.00	

	Mode	Channel	Frequency (MHz)	Ant 1			Ant 2			Ant 1+2		
				Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	Not Required	14.00	Not Required	Not Required	14.00	Not Required	Not Required	13.00	Not Required
		56	5280		14.00			14.00			13.00	
		60	5300		14.00			14.00			13.00	
		64	5320		14.00			14.00			13.00	
	802.11n-HT20 MCS0	52	5260		14.00			14.00			13.00	
		56	5280		14.00			14.00			13.00	
		60	5300		14.00			14.00			13.00	
		64	5320		14.00			14.00			13.00	
	802.11n-HT40 MCS0	54	5270		14.00			14.00			13.00	
		62	5310		14.00			14.00			13.00	
	802.11ac-VHT20 MCS0	52	5260		14.00			14.00			13.00	
		56	5280		14.00			14.00			13.00	
		60	5300		14.00			14.00			13.00	
		64	5320		14.00			14.00			13.00	
	802.11ac-VHT40 MCS0	54	5270		14.00			14.00			13.00	
		62	5310		14.00			14.00			13.00	
	802.11ac-VHT80 MCS0	58	5290	13.30	14.00	95.69	13.90	14.00	95.26		13.00	

	Mode	Channel	Frequency (MHz)	Ant 1			Ant 2			Ant 1+2		
				Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	Not Required	14.00	Not Required	Not Required	14.00	Not Required	Not Required	13.00	Not Required
		116	5580		14.00			14.00			13.00	
		124	5620		14.00			14.00			13.00	
		132	5660		14.00			14.00			13.00	
		140	5700		14.00			14.00			13.00	
		144	5720		14.00			14.00			13.00	
	802.11n-HT20 MCS0	100	5500		14.00			14.00			13.00	
		116	5580		14.00			14.00			13.00	
		124	5620		14.00			14.00			13.00	
		132	5660		14.00			14.00			13.00	
		140	5700		14.00			14.00			13.00	
		144	5720		14.00			14.00			13.00	
	802.11n-HT40 MCS0	102	5510		14.00			14.00			13.00	
		110	5550		14.00			14.00			13.00	
		126	5630		14.00			14.00			13.00	
		134	5670		14.00			14.00			13.00	
		142	5710		14.00			14.00			13.00	
		144	5720		14.00			14.00			13.00	
	802.11ac-VHT20 MCS0	100	5500		14.00			14.00			13.00	
		116	5580		14.00			14.00			13.00	
		124	5620		14.00			14.00			13.00	
		132	5660		14.00			14.00			13.00	
		140	5700		14.00			14.00			13.00	
		144	5720		14.00			14.00			13.00	
	802.11ac-VHT40 MCS0	102	5510		14.00			14.00			13.00	
		110	5550		14.00			14.00			13.00	
		126	5630		14.00			14.00			13.00	
		134	5670		14.00			14.00			13.00	
		142	5710		14.00			14.00			13.00	
		144	5720		14.00			14.00			13.00	
	802.11ac-VHT80 MCS0	106	5530	13.20	14.00	95.69	13.10	14.00	95.26		13.00	
		122	5610	13.20	14.00		13.60	14.00			13.00	
		138	5690	13.60	14.00		13.70	14.00			13.00	

	Mode	Channel	Frequency (MHz)	Ant 1			Ant 2			Ant 1+2		
				Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	149	5745	Not Required	14.00	Not Required	Not Required	14.00	Not Required	Not Required	13.00	Not Required
		157	5785		14.00			14.00			13.00	
		165	5825		14.00			14.00			13.00	
	802.11n-HT20 MCS0	149	5745		14.00			14.00			13.00	
		157	5785		14.00			14.00			13.00	
		165	5825		14.00			14.00			13.00	
	802.11n-HT40 MCS0	151	5755		14.00			14.00			13.00	
		159	5795		14.00			14.00			13.00	
	802.11ac-VHT20 MCS0	149	5745		14.00			14.00			13.00	
		157	5785		14.00			14.00			13.00	
		165	5825		14.00			14.00			13.00	
		151	5755		14.00			14.00			13.00	
	802.11ac-VHT40 MCS0	159	5795		14.00			14.00			13.00	
		155	5775		14.00			14.00			13.00	
	802.11ac-VHT80 MCS0	155	5775	13.20	14.00	95.69	13.90	14.00	95.26		13.00	




<2.4GHz Bluetooth>

Bluetooth	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	BR / EDR 1Mbps	0	2402	9.90	10.00	77.07
		39	2441	9.90	10.00	
		78	2480	9.60	10.00	
	BR / EDR 2Mbps	0	2402	Not Required	7.00	Not Required
		39	2441		7.00	
		78	2480		7.00	
	BR / EDR 3Mbps	0	2402		7.00	
		39	2441		7.00	
		78	2480		7.00	
	LE 1Mbps	0	2402		4.00	
		19	2440		4.00	
		39	2480		4.00	
	LE 2Mbps	0	2402		4.00	
		19	2440		4.00	
		39	2480		4.00	


General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 77.07% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

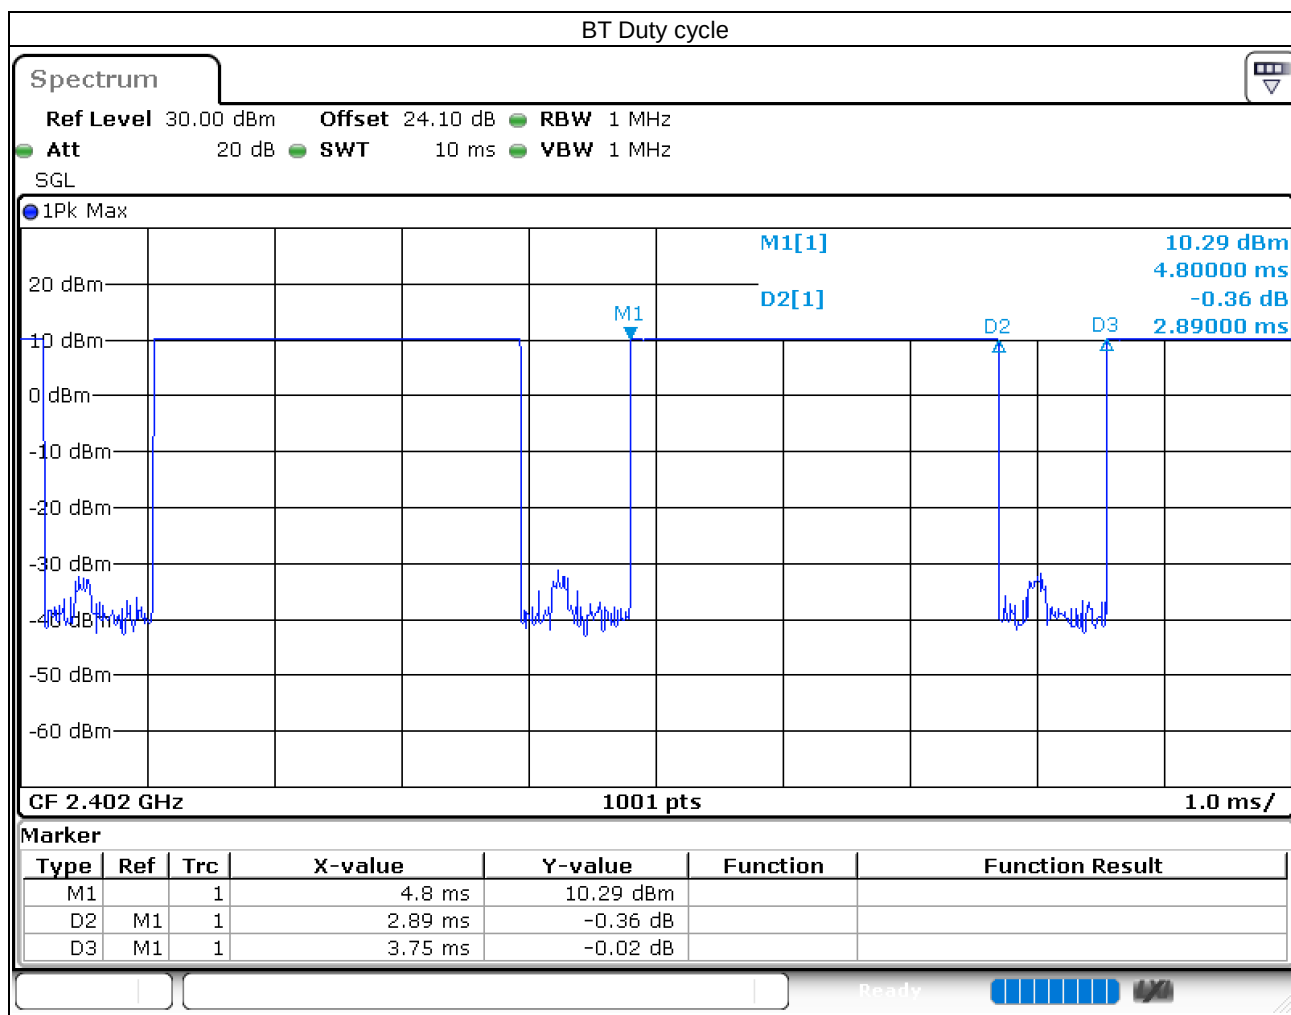

11. Antenna Location


<ZQ610>

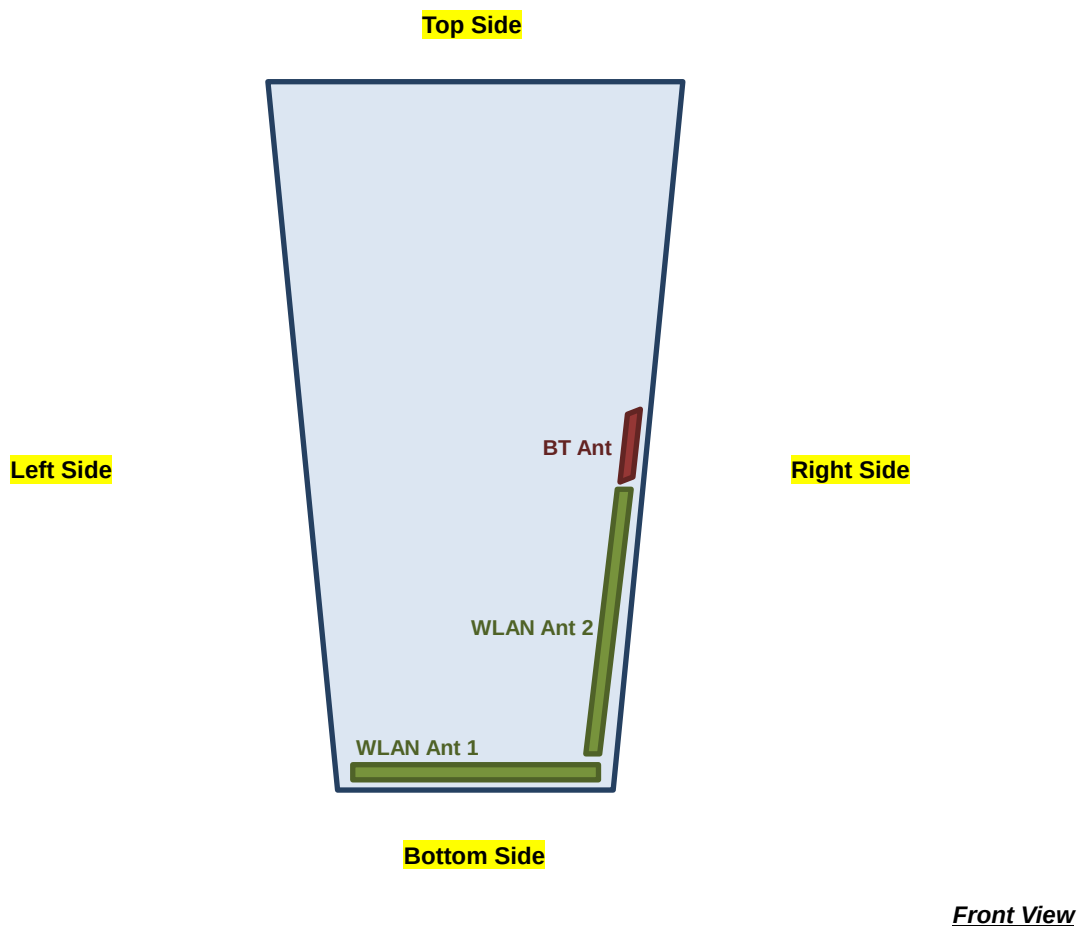

The separation distance for antenna to edge :

Antenna	To Front (mm)	To Back (mm)	To Left Side (mm)	To Right Side (mm)	To Top Side (mm)	To Bottom Side (mm)
WLAN Antenna 1	< 25	< 25	< 25	< 25	> 25	< 25
WLAN Antenna 2	< 25	< 25	< 25	< 25	> 25	< 25
Bluetooth Antenna	< 25	< 25	< 25	< 25	> 25	< 25


<ZQ620>

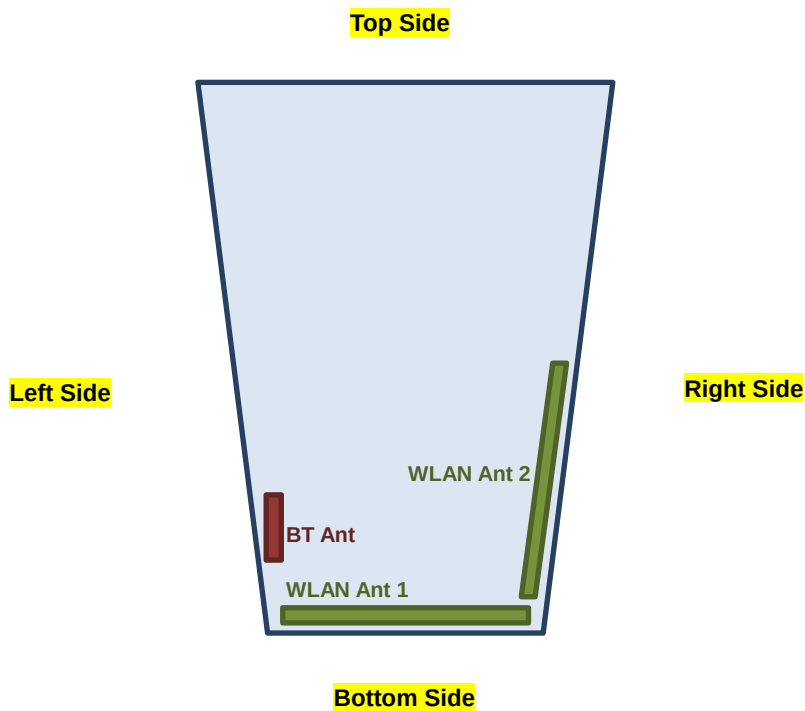
Front View

The separation distance for antenna to edge :

Antenna	To Front (mm)	To Back (mm)	To Left Side (mm)	To Right Side (mm)	To Top Side (mm)	To Bottom Side (mm)
WLAN Antenna 1	< 25	< 25	< 25	< 25	> 25	< 25
WLAN Antenna 2	< 25	< 25	< 25	< 25	> 25	< 25
Bluetooth Antenna	< 25	< 25	< 25	< 25	> 25	< 25

<ZQ630>

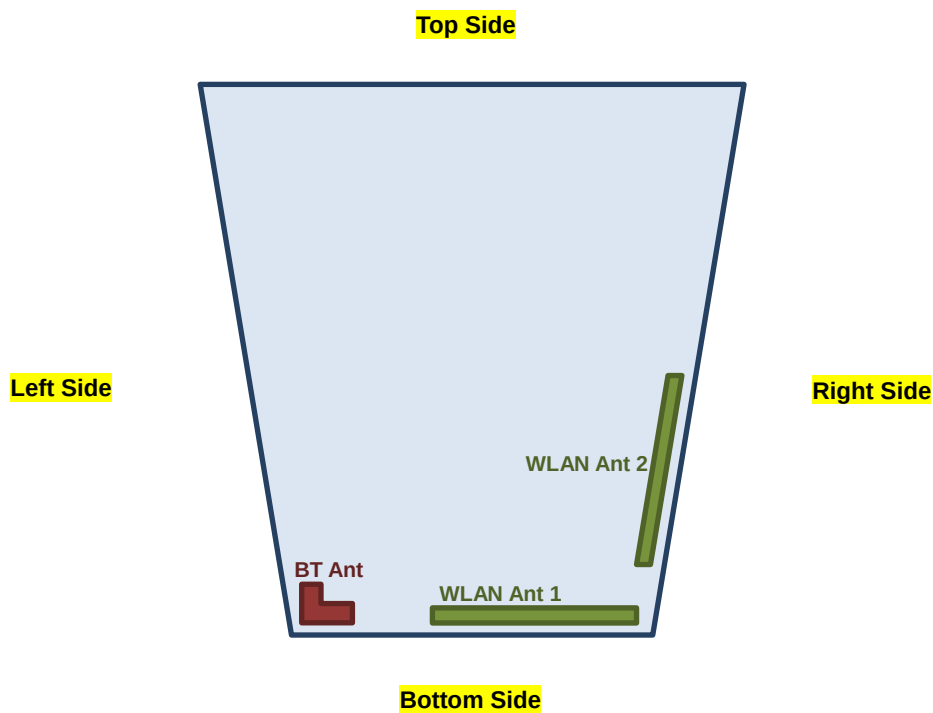
Front View

The separation distance for antenna to edge :

Antenna	To Front (mm)	To Back (mm)	To Left Side (mm)	To Right Side (mm)	To Top Side (mm)	To Bottom Side (mm)
WLAN Antenna 1	< 25	< 25	< 25	< 25	> 25	< 25
WLAN Antenna 2	< 25	< 25	< 25	< 25	> 25	< 25
Bluetooth Antenna	< 25	< 25	< 25	< 25	> 25	< 25

12. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, WLAN5.2GHz SAR testing is not required when the WLAN5.3GHz band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for WLAN5.2GHz band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. For WLAN SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
6. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6 W/kg and SAR peak to location ratio ≤ 0.04 , no additional SAR measurements for MIMO.
7. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

12.1 Body SAR for ZQ610

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 1	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	-0.01	0.200	0.205
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 1	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	0.05	0.214	0.219
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 1	Battery 2	13	2472	16.90	17.00	1.023	100	1.000	-0.03	0.181	0.185
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 2	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	0.09	0.051	0.052
01	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 2	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	-0.01	0.603	0.617
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 2	Battery 1	1	2412	16.50	17.00	1.122	100	1.000	0.03	0.521	0.585
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 2	Battery 1	6	2437	16.40	17.00	1.148	100	1.000	-0.09	0.535	0.614
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 2	Battery 1	11	2462	16.30	17.00	1.175	100	1.000	0.08	0.512	0.602
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 2	Battery 1	12	2467	16.80	17.00	1.047	100	1.000	0.14	0.507	0.531
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 2	Battery 2	13	2472	16.90	17.00	1.023	100	1.000	0.02	0.473	0.484
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	Battery 1	42	5210	14.90	15.00	1.023	95.69	1.045	0.09	0.062	0.066
02	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 1	42	5210	14.90	15.00	1.023	95.69	1.045	0.04	0.454	0.485
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 2	42	5210	14.90	15.00	1.023	95.69	1.045	-0.01	0.285	0.305
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	Battery 1	58	5290	13.90	14.00	1.023	95.26	1.050	-0.07	0.169	0.182
03	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 1	58	5290	13.90	14.00	1.023	95.26	1.050	-0.01	0.170	0.183
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 2	58	5290	13.90	14.00	1.023	95.26	1.050	0.02	0.125	0.134
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	Battery 1	138	5690	13.60	14.00	1.096	95.69	1.045	0.09	0.101	0.116
04	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 1	138	5690	13.60	14.00	1.096	95.69	1.045	0.16	0.316	0.362
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 1	106	5530	13.20	14.00	1.202	95.69	1.045	0.04	0.281	0.353
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 1	122	5610	13.20	14.00	1.202	95.69	1.045	0.12	0.284	0.357
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 2	138	5690	13.60	14.00	1.096	95.69	1.045	0.05	0.301	0.345
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	Battery 1	138	5690	13.70	14.00	1.072	95.26	1.050	-0.15	0.088	0.099
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 1	138	5690	13.70	14.00	1.072	95.26	1.050	0.05	0.117	0.132
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 2	138	5690	13.70	14.00	1.072	95.26	1.050	-0.01	0.077	0.087
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	Battery 1	155	5775	13.20	14.00	1.202	95.69	1.045	0.03	0.066	0.083
05	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 1	155	5775	13.20	14.00	1.202	95.69	1.045	0.19	0.239	0.300
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 2	155	5775	13.20	14.00	1.202	95.69	1.045	-0.12	0.161	0.202
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	Battery 1	155	5775	13.90	14.00	1.023	95.26	1.050	0.08	0.110	0.118
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 1	155	5775	13.90	14.00	1.023	95.26	1.050	-0.06	0.129	0.139
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 2	155	5775	13.90	14.00	1.023	95.26	1.050	0.05	0.094	0.101

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
06	Bluetooth	1Mbps	Front	0mm	Battery 1	39	2441	9.90	10.00	1.023	77.07	1.081	0.01	0.002	0.002
	Bluetooth	1Mbps	Back	0mm	Battery 1	39	2441	9.90	10.00	1.023	77.07	1.081	-0.06	0.001	0.001
	Bluetooth	1Mbps	Back	0mm	Battery 1	0	2402	9.90	10.00	1.023	77.07	1.081	0.09	0.001	0.001
	Bluetooth	1Mbps	Back	0mm	Battery 1	78	2480	9.60	10.00	1.096	77.07	1.081	0.17	0.001	0.001
	Bluetooth	1Mbps	Front	0mm	Battery 2	39	2441	9.90	10.00	1.023	77.07	1.081	0.16	0.001	0.001

**12.2 Body SAR for ZQ620****<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
07	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 1	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	0	0.162	0.166
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 1	Battery 1	1	2412	16.40	17.00	1.148	100	1.000	0.08	0.139	0.160
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 1	Battery 1	6	2437	16.30	17.00	1.175	100	1.000	0.01	0.135	0.159
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 1	Battery 1	11	2462	16.50	17.00	1.122	100	1.000	0.03	0.140	0.157
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 1	Battery 1	12	2467	16.90	17.00	1.023	100	1.000	-0.08	0.158	0.162
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 1	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	0.02	0.042	0.043
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 1	Battery 2	13	2472	16.90	17.00	1.023	100	1.000	0.17	0.158	0.162
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 2	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	0.03	0.064	0.065
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 2	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	-0.06	0.053	0.054
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 2	Battery 2	13	2472	16.90	17.00	1.023	100	1.000	0.19	0.059	0.060
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	Battery 1	42	5210	14.90	15.00	1.023	95.69	1.045	-0.01	0.065	0.070
08	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 1	42	5210	14.90	15.00	1.023	95.69	1.045	0.03	0.222	0.237
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 2	42	5210	14.90	15.00	1.023	95.69	1.045	-0.14	0.152	0.163
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	Battery 1	58	5290	13.90	14.00	1.023	95.26	1.050	0.06	0.135	0.145
09	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 1	58	5290	13.90	14.00	1.023	95.26	1.050	0.07	0.149	0.160
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 2	58	5290	13.90	14.00	1.023	95.26	1.050	0.14	0.075	0.081
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	Battery 1	138	5690	13.60	14.00	1.096	95.69	1.045	-0.16	0.041	0.047
10	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 1	138	5690	13.60	14.00	1.096	95.69	1.045	0.08	0.134	0.154
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 1	106	5530	13.20	14.00	1.202	95.69	1.045	0.09	0.115	0.144
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 1	122	5610	13.20	14.00	1.202	95.69	1.045	-0.01	0.108	0.136
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 2	138	5690	13.60	14.00	1.096	95.69	1.045	0.12	0.056	0.064
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	Battery 1	138	5690	13.70	14.00	1.072	95.26	1.050	0.13	0.018	0.020
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 1	138	5690	13.70	14.00	1.072	95.26	1.050	0.12	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	Battery 2	138	5690	13.70	14.00	1.072	95.26	1.050	0.07	0.009	0.010
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	Battery 1	155	5775	13.20	14.00	1.202	95.69	1.045	0.07	0.059	0.074
11	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 1	155	5775	13.20	14.00	1.202	95.69	1.045	0.13	0.125	0.157
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 2	155	5775	13.20	14.00	1.202	95.69	1.045	0.11	0.056	0.070
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	Battery 1	155	5775	13.90	14.00	1.023	95.26	1.050	0.19	0.053	0.057
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 1	155	5775	13.90	14.00	1.023	95.26	1.050	-0.12	0.039	0.042
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	Battery 2	155	5775	13.90	14.00	1.023	95.26	1.050	0.1	0.049	0.053

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
12	Bluetooth	1Mbps	Front	0mm	Battery 1	39	2441	9.90	10.00	1.023	77.07	1.081	0.05	0.006	0.007
	Bluetooth	1Mbps	Front	0mm	Battery 1	0	2402	9.90	10.00	1.023	77.07	1.081	-0.08	0.004	0.004
	Bluetooth	1Mbps	Front	0mm	Battery 1	78	2480	9.60	10.00	1.096	77.07	1.081	0.16	0.003	0.004
	Bluetooth	1Mbps	Back	0mm	Battery 1	39	2441	9.90	10.00	1.023	77.07	1.081	0.02	0.001	0.001
	Bluetooth	1Mbps	Front	0mm	Battery 2	39	2441	9.90	10.00	1.023	77.07	1.081	0.02	0.004	0.004

**12.3 Body SAR for ZQ630****<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Holster	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 1	-	Battery 3	13	2472	16.90	17.00	1.023	100	1.000	0.02	0.047	0.048
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 1	-	Battery 3	13	2472	16.90	17.00	1.023	100	1.000	0.06	0.041	0.042
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 1	Holster	Battery 3	13	2472	16.90	17.00	1.023	100	1.000	0.04	0.022	0.023
13	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 2	-	Battery 3	13	2472	16.90	17.00	1.023	100	1.000	-0.02	0.118	0.121
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 2	-	Battery 3	1	2412	16.50	17.00	1.122	100	1.000	0.08	0.101	0.113
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 2	-	Battery 3	6	2437	16.40	17.00	1.148	100	1.000	0.01	0.094	0.108
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 2	-	Battery 3	11	2462	16.30	17.00	1.175	100	1.000	0.03	0.091	0.107
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 2	-	Battery 3	12	2467	16.80	17.00	1.047	100	1.000	-0.08	0.111	0.116
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 2	-	Battery 3	13	2472	16.90	17.00	1.023	100	1.000	0.06	0.001	0.001
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 2	Holster	Battery 3	13	2472	16.90	17.00	1.023	100	1.000	0.03	0.001	0.001
14	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	-	Battery 3	42	5210	14.90	15.00	1.023	95.69	1.045	0.1	0.453	0.484
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	-	Battery 3	42	5210	14.90	15.00	1.023	95.69	1.045	0.03	0.276	0.295
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Holster	Battery 3	42	5210	14.90	15.00	1.023	95.69	1.045	0.18	0.174	0.186
15	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	-	Battery 3	58	5290	13.90	14.00	1.023	95.26	1.050	0.09	0.091	0.098
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	-	Battery 3	58	5290	13.90	14.00	1.023	95.26	1.050	0.05	0.002	0.002
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Holster	Battery 3	58	5290	13.90	14.00	1.023	95.26	1.050	0.04	0.001	0.001
16	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	-	Battery 3	138	5690	13.60	14.00	1.096	95.69	1.045	0.04	0.240	0.275
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	-	Battery 3	106	5530	13.20	14.00	1.202	95.69	1.045	0.09	0.208	0.261
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	-	Battery 3	122	5610	13.20	14.00	1.202	95.69	1.045	-0.12	0.211	0.265
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	-	Battery 3	138	5690	13.60	14.00	1.096	95.69	1.045	-0.19	0.083	0.095
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Holster	Battery 3	138	5690	13.60	14.00	1.096	95.69	1.045	-0.06	0.048	0.055
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	-	Battery 3	138	5690	13.70	14.00	1.072	95.26	1.050	0.15	0.054	0.061
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	-	Battery 3	138	5690	13.70	14.00	1.072	95.26	1.050	0.16	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Holster	Battery 3	138	5690	13.70	14.00	1.072	95.26	1.050	0.06	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	-	Battery 3	155	5775	13.20	14.00	1.202	95.69	1.045	0.08	0.043	0.054
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	-	Battery 3	155	5775	13.20	14.00	1.202	95.69	1.045	-0.05	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Holster	Battery 3	155	5775	13.20	14.00	1.202	95.69	1.045	0.05	0.001	0.001
17	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	-	Battery 3	155	5775	13.90	14.00	1.023	95.26	1.050	0.06	0.245	0.263
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	-	Battery 3	155	5775	13.90	14.00	1.023	95.26	1.050	0.15	0.112	0.120
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Holster	Battery 3	155	5775	13.90	14.00	1.023	95.26	1.050	0.08	0.078	0.084

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Holster	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
18	Bluetooth	1Mbps	Front	0mm	-	Battery 3	39	2441	9.90	10.00	1.023	77.07	1.081	0.08	0.016	0.018
	Bluetooth	1Mbps	Front	0mm	-	Battery 3	0	2402	9.90	10.00	1.023	77.07	1.081	0.05	0.014	0.015
	Bluetooth	1Mbps	Front	0mm	-	Battery 3	78	2480	9.60	10.00	1.096	77.07	1.081	0.01	0.011	0.013
	Bluetooth	1Mbps	Back	0mm	-	Battery 3	39	2441	9.90	10.00	1.023	77.07	1.081	-0.09	0.001	0.001
	Bluetooth	1Mbps	Back	0mm	Holster	Battery 3	39	2441	9.90	10.00	1.023	77.07	1.081	-0.01	0.001	0.001

**12.4 Hand SAR for ZQ610****<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 1	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	-0.01	0.101	0.103
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 1	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	0.05	0.111	0.114
	WLAN2.4GHz	802.11b 1Mbps	Left Side	0mm	Ant 1	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	0.02	0.028	0.029
	WLAN2.4GHz	802.11b 1Mbps	Right Side	0mm	Ant 1	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	0.13	0.025	0.026
19	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Ant 1	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	0.11	0.521	0.533
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Ant 1	Battery 1	1	2412	16.40	17.00	1.148	100	1.000	-0.16	0.289	0.332
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Ant 1	Battery 1	6	2437	16.30	17.00	1.175	100	1.000	0.08	0.355	0.417
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Ant 1	Battery 1	11	2462	16.50	17.00	1.122	100	1.000	-0.16	0.289	0.324
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Ant 1	Battery 1	12	2467	16.90	17.00	1.023	100	1.000	0.08	0.355	0.363
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Ant 1	Battery 2	13	2472	16.90	17.00	1.023	100	1.000	0.02	0.509	0.521
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 2	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	0.09	0.024	0.025
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 2	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	-0.01	0.272	0.278
	WLAN2.4GHz	802.11b 1Mbps	Left Side	0mm	Ant 2	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	0.02	0.072	0.074
	WLAN2.4GHz	802.11b 1Mbps	Right Side	0mm	Ant 2	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	-0.03	0.266	0.272
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Ant 2	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	0.05	0.064	0.065
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 2	Battery 2	13	2472	16.90	17.00	1.023	100	1.000	0.08	0.223	0.228



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	Battery 1	42	5210	14.90	15.00	1.023	95.69	1.045	0.09	0.022	0.024
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 1	42	5210	14.90	15.00	1.023	95.69	1.045	0.04	0.133	0.142
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 1	Battery 1	42	5210	14.90	15.00	1.023	95.69	1.045	0.02	0.029	0.031
20	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 1	Battery 1	42	5210	14.90	15.00	1.023	95.69	1.045	-0.09	0.180	0.192
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 1	Battery 1	42	5210	14.90	15.00	1.023	95.69	1.045	0.01	0.033	0.035
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 1	Battery 2	42	5210	14.90	15.00	1.023	95.69	1.045	0.03	0.175	0.187
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	Battery 1	58	5290	13.90	14.00	1.023	95.26	1.050	-0.07	0.041	0.044
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 1	58	5290	13.90	14.00	1.023	95.26	1.050	-0.01	0.045	0.048
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 2	Battery 1	58	5290	13.90	14.00	1.023	95.26	1.050	0.02	0.033	0.035
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 2	Battery 1	58	5290	13.90	14.00	1.023	95.26	1.050	0.05	0.051	0.055
21	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 2	Battery 1	58	5290	13.90	14.00	1.023	95.26	1.050	-0.06	0.282	0.303
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 2	Battery 2	58	5290	13.90	14.00	1.023	95.26	1.050	0.03	0.249	0.268
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	Battery 1	138	5690	13.60	14.00	1.096	95.69	1.045	0.09	0.037	0.042
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 1	138	5690	13.60	14.00	1.096	95.69	1.045	0.16	0.085	0.097
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 1	Battery 1	138	5690	13.60	14.00	1.096	95.69	1.045	0.01	0.030	0.034
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 1	Battery 1	138	5690	13.60	14.00	1.096	95.69	1.045	0.01	0.223	0.256
22	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 1	Battery 1	138	5690	13.60	14.00	1.096	95.69	1.045	0.03	0.236	0.270
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 1	Battery 1	106	5530	13.20	14.00	1.202	95.69	1.045	0.03	0.204	0.256
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 1	Battery 1	122	5610	13.20	14.00	1.202	95.69	1.045	0.03	0.199	0.250
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 1	Battery 2	138	5690	13.60	14.00	1.096	95.69	1.045	-0.02	0.036	0.041
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	Battery 1	138	5690	13.70	14.00	1.072	95.26	1.050	-0.15	0.025	0.028
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 1	138	5690	13.70	14.00	1.072	95.26	1.050	0.05	0.038	0.043
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 2	Battery 1	138	5690	13.70	14.00	1.072	95.26	1.050	0.02	0.032	0.036
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 2	Battery 1	138	5690	13.70	14.00	1.072	95.26	1.050	-0.07	0.034	0.038
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 2	Battery 1	138	5690	13.70	14.00	1.072	95.26	1.050	0.04	0.180	0.203
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 2	Battery 2	138	5690	13.70	14.00	1.072	95.26	1.050	-0.09	0.168	0.189
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	Battery 1	155	5775	13.20	14.00	1.202	95.69	1.045	0.03	0.025	0.031
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 1	155	5775	13.20	14.00	1.202	95.69	1.045	0.19	0.067	0.084
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 1	Battery 1	155	5775	13.20	14.00	1.202	95.69	1.045	0.02	0.013	0.016
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 1	Battery 1	155	5775	13.20	14.00	1.202	95.69	1.045	-0.02	0.167	0.210
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 1	Battery 1	155	5775	13.20	14.00	1.202	95.69	1.045	0.04	0.027	0.034
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 1	Battery 2	155	5775	13.20	14.00	1.202	95.69	1.045	0.01	0.161	0.202
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	Battery 1	155	5775	13.90	14.00	1.023	95.26	1.050	0.08	0.035	0.038
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 1	155	5775	13.90	14.00	1.023	95.26	1.050	-0.06	0.046	0.049
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 2	Battery 1	155	5775	13.90	14.00	1.023	95.26	1.050	0.02	0.031	0.033
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 2	Battery 1	155	5775	13.90	14.00	1.023	95.26	1.050	0.11	0.034	0.037
23	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 2	Battery 1	155	5775	13.90	14.00	1.023	95.26	1.050	0.08	0.226	0.243
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 2	Battery 2	155	5775	13.90	14.00	1.023	95.26	1.050	0.03	0.214	0.230

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	Bluetooth	1Mbps	Front	0mm	Battery 1	39	2441	9.90	10.00	1.023	77.07	1.081	0.01	0.001	0.001
	Bluetooth	1Mbps	Back	0mm	Battery 1	39	2441	9.90	10.00	1.023	77.07	1.081	-0.06	0.001	0.001
	Bluetooth	1Mbps	Left Side	0mm	Battery 1	39	2441	9.90	10.00	1.023	77.07	1.081	0.07	0.001	0.001
24	Bluetooth	1Mbps	Right Side	0mm	Battery 1	39	2441	9.90	10.00	1.023	77.07	1.081	0.15	0.001	0.001
	Bluetooth	1Mbps	Right Side	0mm	Battery 1	0	2402	9.90	10.00	1.023	77.07	1.081	0.08	0.001	0.001
	Bluetooth	1Mbps	Right Side	0mm	Battery 1	78	2480	9.60	10.00	1.096	77.07	1.081	0.12	0.001	0.001
	Bluetooth	1Mbps	Bottom Side	0mm	Battery 1	39	2441	9.90	10.00	1.023	77.07	1.081	0.15	0.001	0.001
	Bluetooth	1Mbps	Right Side	0mm	Battery 2	39	2441	9.90	10.00	1.023	77.07	1.081	-0.06	0.001	0.001

**12.5 Hand SAR for ZQ620****<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 1	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	0	0.080	0.082
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 1	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	0.02	0.021	0.021
	WLAN2.4GHz	802.11b 1Mbps	Left Side	0mm	Ant 1	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	0.01	0.065	0.067
	WLAN2.4GHz	802.11b 1Mbps	Right Side	0mm	Ant 1	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	-0.1	0.001	0.001
25	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Ant 1	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	0.09	0.194	0.199
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Ant 1	Battery 1	1	2412	16.40	17.00	1.148	100	1.000	-0.13	0.171	0.196
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Ant 1	Battery 1	6	2437	16.30	17.00	1.175	100	1.000	-0.16	0.161	0.189
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Ant 1	Battery 1	11	2462	16.50	17.00	1.122	100	1.000	0.08	0.173	0.194
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Ant 1	Battery 1	12	2467	16.90	17.00	1.023	100	1.000	0.14	0.184	0.188
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Ant 1	Battery 2	13	2472	16.90	17.00	1.023	100	1.000	-0.08	0.184	0.188
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 2	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	0.03	0.034	0.035
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 2	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	-0.06	0.022	0.023
	WLAN2.4GHz	802.11b 1Mbps	Left Side	0mm	Ant 2	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	0.12	0.001	0.001
	WLAN2.4GHz	802.11b 1Mbps	Right Side	0mm	Ant 2	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	-0.05	0.049	0.050
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Ant 2	Battery 1	13	2472	16.90	17.00	1.023	100	1.000	-0.05	0.108	0.111
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Ant 2	Battery 2	13	2472	16.90	17.00	1.023	100	1.000	0.01	0.092	0.094



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	Battery 1	42	5210	14.90	15.00	1.023	95.69	1.045	-0.01	0.022	0.024
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 1	42	5210	14.90	15.00	1.023	95.69	1.045	0.03	0.079	0.084
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 1	Battery 1	42	5210	14.90	15.00	1.023	95.69	1.045	0.08	0.013	0.014
26	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 1	Battery 1	42	5210	14.90	15.00	1.023	95.69	1.045	0.18	0.083	0.089
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 1	Battery 1	42	5210	14.90	15.00	1.023	95.69	1.045	0.09	0.036	0.038
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 1	Battery 2	42	5210	14.90	15.00	1.023	95.69	1.045	0.06	0.069	0.074
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	Battery 1	58	5290	13.90	14.00	1.023	95.26	1.050	0.06	0.041	0.044
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 1	58	5290	13.90	14.00	1.023	95.26	1.050	0.07	0.044	0.047
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 2	Battery 1	58	5290	13.90	14.00	1.023	95.26	1.050	-0.17	0.039	0.042
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 2	Battery 1	58	5290	13.90	14.00	1.023	95.26	1.050	0.16	0.012	0.013
27	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 2	Battery 1	58	5290	13.90	14.00	1.023	95.26	1.050	0.07	0.045	0.048
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 2	Battery 2	58	5290	13.90	14.00	1.023	95.26	1.050	0.04	0.038	0.041
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	Battery 1	138	5690	13.60	14.00	1.096	95.69	1.045	-0.16	0.012	0.014
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 1	138	5690	13.60	14.00	1.096	95.69	1.045	0.08	0.036	0.041
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 1	Battery 1	138	5690	13.60	14.00	1.096	95.69	1.045	0.12	0.006	0.007
28	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 1	Battery 1	138	5690	13.60	14.00	1.096	95.69	1.045	0.07	0.057	0.065
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 1	Battery 1	106	5530	13.20	14.00	1.202	95.69	1.045	0.05	0.048	0.060
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 1	Battery 1	122	5610	13.20	14.00	1.202	95.69	1.045	0.12	0.051	0.064
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 1	Battery 1	138	5690	13.60	14.00	1.096	95.69	1.045	-0.01	0.020	0.023
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 1	Battery 2	138	5690	13.60	14.00	1.096	95.69	1.045	0.03	0.051	0.058
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	Battery 1	138	5690	13.70	14.00	1.072	95.26	1.050	0.13	0.004	0.004
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 1	138	5690	13.70	14.00	1.072	95.26	1.050	0.12	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 2	Battery 1	138	5690	13.70	14.00	1.072	95.26	1.050	0.05	0.031	0.035
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 2	Battery 1	138	5690	13.70	14.00	1.072	95.26	1.050	-0.14	0.010	0.011
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 2	Battery 1	138	5690	13.70	14.00	1.072	95.26	1.050	0.09	0.038	0.043
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 2	Battery 2	138	5690	13.70	14.00	1.072	95.26	1.050	0.02	0.033	0.037
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	Battery 1	155	5775	13.20	14.00	1.202	95.69	1.045	0.07	0.013	0.016
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 1	155	5775	13.20	14.00	1.202	95.69	1.045	0.13	0.033	0.041
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 1	Battery 1	155	5775	13.20	14.00	1.202	95.69	1.045	-0.16	0.020	0.025
29	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 1	Battery 1	155	5775	13.20	14.00	1.202	95.69	1.045	0.08	0.084	0.106
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 1	Battery 1	155	5775	13.20	14.00	1.202	95.69	1.045	-0.16	0.045	0.057
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 1	Battery 2	155	5775	13.20	14.00	1.202	95.69	1.045	0.09	0.078	0.098
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	Battery 1	155	5775	13.90	14.00	1.023	95.26	1.050	0.19	0.013	0.014
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 1	155	5775	13.90	14.00	1.023	95.26	1.050	-0.12	0.021	0.023
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 2	Battery 1	155	5775	13.90	14.00	1.023	95.26	1.050	-0.11	0.054	0.058
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 2	Battery 1	155	5775	13.90	14.00	1.023	95.26	1.050	-0.18	0.029	0.031
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 2	Battery 1	155	5775	13.90	14.00	1.023	95.26	1.050	0.03	0.080	0.086
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 2	Battery 2	155	5775	13.90	14.00	1.023	95.26	1.050	-0.09	0.075	0.081

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	Bluetooth	1Mbps	Front	0mm	Battery 1	39	2441	9.90	10.00	1.023	77.07	1.081	0.05	0.002	0.002
	Bluetooth	1Mbps	Back	0mm	Battery 1	39	2441	9.90	10.00	1.023	77.07	1.081	0.02	0.001	0.001
30	Bluetooth	1Mbps	Left Side	0mm	Battery 1	39	2441	9.90	10.00	1.023	77.07	1.081	0.18	0.067	0.074
	Bluetooth	1Mbps	Left Side	0mm	Battery 1	0	2402	9.90	10.00	1.023	77.07	1.081	0.05	0.062	0.069
	Bluetooth	1Mbps	Left Side	0mm	Battery 1	78	2480	9.60	10.00	1.096	77.07	1.081	0.1	0.057	0.068
	Bluetooth	1Mbps	Right Side	0mm	Battery 1	39	2441	9.90	10.00	1.023	77.07	1.081	0.01	0.001	0.001
	Bluetooth	1Mbps	Bottom Side	0mm	Battery 1	39	2441	9.90	10.00	1.023	77.07	1.081	0.15	0.001	0.001
	Bluetooth	1Mbps	Left Side	0mm	Battery 2	39	2441	9.90	10.00	1.023	77.07	1.081	-0.06	0.058	0.064

**12.6 Hand SAR for ZQ630****<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Holster	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 1	-	Battery 3	13	2472	16.90	17.00	1.023	100	1.000	0.02	0.024	0.025
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 1	-	Battery 3	13	2472	16.90	17.00	1.023	100	1.000	0.06	0.021	0.021
	WLAN2.4GHz	802.11b 1Mbps	Left Side	0mm	Ant 1	-	Battery 3	13	2472	16.90	17.00	1.023	100	1.000	-0.14	0.001	0.001
	WLAN2.4GHz	802.11b 1Mbps	Right Side	0mm	Ant 1	-	Battery 3	13	2472	16.90	17.00	1.023	100	1.000	0.07	0.003	0.003
31	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Ant 1	-	Battery 3	13	2472	16.90	17.00	1.023	100	1.000	-0.16	0.124	0.127
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Ant 1	-	Battery 3	1	2412	16.40	17.00	1.148	100	1.000	0.05	0.106	0.122
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Ant 1	-	Battery 3	6	2437	16.30	17.00	1.175	100	1.000	0.02	0.107	0.126
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Ant 1	-	Battery 3	11	2462	16.50	17.00	1.122	100	1.000	-0.09	0.112	0.126
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Ant 1	-	Battery 3	12	2467	16.90	17.00	1.023	100	1.000	-0.11	0.117	0.120
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 1	Holster	Battery 3	13	2472	16.90	17.00	1.023	100	1.000	-0.04	0.011	0.011
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 2	-	Battery 3	13	2472	16.90	17.00	1.023	100	1.000	-0.02	0.062	0.063
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 2	-	Battery 3	13	2472	16.90	17.00	1.023	100	1.000	0.06	0.001	0.001
	WLAN2.4GHz	802.11b 1Mbps	Left Side	0mm	Ant 2	-	Battery 3	13	2472	16.90	17.00	1.023	100	1.000	-0.13	0.001	0.001
	WLAN2.4GHz	802.11b 1Mbps	Right Side	0mm	Ant 2	-	Battery 3	13	2472	16.90	17.00	1.023	100	1.000	0.08	0.001	0.001
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Ant 2	-	Battery 3	13	2472	16.90	17.00	1.023	100	1.000	-0.05	0.061	0.062
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 2	Holster	Battery 3	13	2472	16.90	17.00	1.023	100	1.000	0.03	0.001	0.001

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Holster	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
32	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	-	Battery 3	42	5210	14.90	15.00	1.023	95.69	1.045	0.1	0.166	0.178
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	-	Battery 3	42	5210	14.90	15.00	1.023	95.69	1.045	0.03	0.109	0.117
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 1	-	Battery 3	42	5210	14.90	15.00	1.023	95.69	1.045	0.02	0.028	0.030
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 1	-	Battery 3	42	5210	14.90	15.00	1.023	95.69	1.045	-0.07	0.092	0.098
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 1	-	Battery 3	42	5210	14.90	15.00	1.023	95.69	1.045	0.01	0.161	0.172
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Holster	Battery 3	42	5210	14.90	15.00	1.023	95.69	1.045	0.18	0.072	0.077
33	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	-	Battery 3	58	5290	13.90	14.00	1.023	95.26	1.050	0.09	0.028	0.030
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	-	Battery 3	58	5290	13.90	14.00	1.023	95.26	1.050	0.16	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 2	-	Battery 3	58	5290	13.90	14.00	1.023	95.26	1.050	-0.16	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 2	-	Battery 3	58	5290	13.90	14.00	1.023	95.26	1.050	-0.02	0.010	0.011
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 2	-	Battery 3	58	5290	13.90	14.00	1.023	95.26	1.050	0.11	0.020	0.021
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Holster	Battery 3	58	5290	13.90	14.00	1.023	95.26	1.050	0.04	0.001	0.001
34	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	-	Battery 3	138	5690	13.60	14.00	1.096	95.69	1.045	0.04	0.090	0.103
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	-	Battery 3	106	5530	13.20	14.00	1.202	95.69	1.045	0.09	0.075	0.094
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	-	Battery 3	122	5610	13.20	14.00	1.202	95.69	1.045	-0.12	0.077	0.097
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	-	Battery 3	138	5690	13.60	14.00	1.096	95.69	1.045	-0.19	0.021	0.024
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 1	-	Battery 3	138	5690	13.60	14.00	1.096	95.69	1.045	0.08	0.029	0.033
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 1	-	Battery 3	138	5690	13.60	14.00	1.096	95.69	1.045	-0.17	0.015	0.017
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 1	-	Battery 3	138	5690	13.60	14.00	1.096	95.69	1.045	0.18	0.010	0.011
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Holster	Battery 3	138	5690	13.60	14.00	1.096	95.69	1.045	-0.06	0.012	0.014
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	-	Battery 3	138	5690	13.70	14.00	1.072	95.26	1.050	0.15	0.016	0.018
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	-	Battery 3	138	5690	13.70	14.00	1.072	95.26	1.050	0.16	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 2	-	Battery 3	138	5690	13.70	14.00	1.072	95.26	1.050	-0.17	0.022	0.025
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 2	-	Battery 3	138	5690	13.70	14.00	1.072	95.26	1.050	-0.05	0.015	0.017
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 2	-	Battery 3	138	5690	13.70	14.00	1.072	95.26	1.050	0.03	0.028	0.032
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Holster	Battery 3	138	5690	13.70	14.00	1.072	95.26	1.050	0.06	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	-	Battery 3	155	5775	13.20	14.00	1.202	95.69	1.045	0.08	0.013	0.016
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	-	Battery 3	155	5775	13.20	14.00	1.202	95.69	1.045	-0.05	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 1	-	Battery 3	155	5775	13.20	14.00	1.202	95.69	1.045	0.03	0.003	0.004
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 1	-	Battery 3	155	5775	13.20	14.00	1.202	95.69	1.045	0.15	0.010	0.013
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 1	-	Battery 3	155	5775	13.20	14.00	1.202	95.69	1.045	-0.04	0.004	0.005
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Holster	Battery 3	155	5775	13.20	14.00	1.202	95.69	1.045	0.05	0.001	0.001
35	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	-	Battery 3	155	5775	13.90	14.00	1.023	95.26	1.050	0.06	0.094	0.101
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	-	Battery 3	155	5775	13.90	14.00	1.023	95.26	1.050	0.15	0.043	0.046
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 2	-	Battery 3	155	5775	13.90	14.00	1.023	95.26	1.050	-0.13	0.011	0.012
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 2	-	Battery 3	155	5775	13.90	14.00	1.023	95.26	1.050	0.09	0.014	0.015
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 2	-	Battery 3	155	5775	13.90	14.00	1.023	95.26	1.050	0.17	0.009	0.010
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Holster	Battery 3	155	5775	13.90	14.00	1.023	95.26	1.050	0.08	0.014	0.015

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Holster	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	Bluetooth	1Mbps	Front	0mm	-	Battery 3	39	2441	9.90	10.00	1.023	77.07	1.081	0.08	0.008	0.008
	Bluetooth	1Mbps	Back	0mm	-	Battery 3	39	2441	9.90	10.00	1.023	77.07	1.081	-0.09	0.002	0.002
	Bluetooth	1Mbps	Left Side	0mm	-	Battery 3	39	2441	9.90	10.00	1.023	77.07	1.081	-0.03	0.001	0.001
	Bluetooth	1Mbps	Right Side	0mm	-	Battery 3	39	2441	9.90	10.00	1.023	77.07	1.081	0.04	0.001	0.001
36	Bluetooth	1Mbps	Bottom Side	0mm	-	Battery 3	39	2441	9.90	10.00	1.023	77.07	1.081	0.13	0.013	0.014
	Bluetooth	1Mbps	Bottom Side	0mm	-	Battery 3	0	2402	9.90	10.00	1.023	77.07	1.081	0.05	0.010	0.011
	Bluetooth	1Mbps	Bottom Side	0mm	-	Battery 3	78	2480	9.60	10.00	1.096	77.07	1.081	0.11	0.009	0.011
	Bluetooth	1Mbps	Back	0mm	Holster	Battery 3	39	2441	9.90	10.00	1.023	77.07	1.081	-0.01	0.001	0.001

13. Simultaneous Transmission Analysis

<ZQ610> <ZQ620> <ZQ630>	NO.	Simultaneous Transmission Configurations	Body	Hand
	1.	WLAN2.4GHz Ant 1 + WLAN2.4GHz Ant 2	Yes	Yes
	2.	WLAN5GHz Ant 1 + WLAN5GHz Ant 2	Yes	Yes

General Note:

1. The worst case WLAN reported SAR for each configuration was used for SAR summation. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN.
2. WLAN RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode. Therefore SPLSR calculation was choose worst case with SAR test results of each antenna in SISO mode perform evaluation.
3. The Scaled SAR summation is calculated based on the same configuration and test position.
4. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation $< 1.6\text{W/kg}$.
 - ii) $\text{SPLSR} = (\text{SAR1} + \text{SAR2})^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR $< 1.6\text{W/kg}$.

13.1 Body Exposure Conditions for ZQ610

Exposure Position	1	2	3	4	5	1+2 Summed 1g SAR (W/kg)	3+4 Summed 1g SAR (W/kg)
	WLAN2.4GHz Ant 1 1g SAR (W/kg)	WLAN2.4GHz Ant 2 1g SAR (W/kg)	WLAN5GHz Ant 1 1g SAR (W/kg)	WLAN5GHz Ant 2 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)		
Front	0.205	0.052	0.116	0.182	0.002	0.257	0.298
Back	0.219	0.617	0.485	0.183	0.001	0.836	0.668

13.2 Body Exposure Conditions for ZQ620

Exposure Position	1	2	3	4	5	1+2 Summed 1g SAR (W/kg)	3+4 Summed 1g SAR (W/kg)
	WLAN2.4GHz Ant 1 1g SAR (W/kg)	WLAN2.4GHz Ant 2 1g SAR (W/kg)	WLAN5GHz Ant 1 1g SAR (W/kg)	WLAN5GHz Ant 2 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)		
Front	0.166	0.065	0.074	0.145	0.007	0.231	0.219
Back	0.043	0.054	0.237	0.160	0.001	0.097	0.397

13.3 Body Exposure Conditions for ZQ630

Exposure Position	1	2	3	4	5	1+2 Summed 1g SAR (W/kg)	3+4 Summed 1g SAR (W/kg)
	WLAN2.4GHz Ant 1 1g SAR (W/kg)	WLAN2.4GHz Ant 2 1g SAR (W/kg)	WLAN5GHz Ant 1 1g SAR (W/kg)	WLAN5GHz Ant 2 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)		
Front	0.048	0.121	0.484	0.263	0.018	0.169	0.747
Back	0.042	0.001	0.295	0.120	0.001	0.043	0.415
Back with Holster	0.023	0.001	0.186	0.084	0.001	0.024	0.270

13.4 Hand Exposure Conditions for ZQ610

Exposure Position	1	2	3	4	5	1+2 Summed 10g SAR (W/kg)	3+4 Summed 10g SAR (W/kg)
	WLAN2.4GHz Ant 1 10g SAR (W/kg)	WLAN2.4GHz Ant 2 10g SAR (W/kg)	WLAN5GHz Ant 1 10g SAR (W/kg)	WLAN5GHz Ant 2 10g SAR (W/kg)	Bluetooth 10g SAR (W/kg)		
Front	0.103	0.025	0.042	0.044	0.001	0.128	0.086
Back	0.114	0.278	0.142	0.049	0.001	0.392	0.191
Left side	0.029	0.074	0.034	0.036	0.001	0.103	0.070
Right side	0.026	0.272	0.256	0.055	0.001	0.298	0.311
Bottom side	0.533	0.065	0.270	0.303	0.001	0.598	0.573

13.5 Hand Exposure Conditions for ZQ620

Exposure Position	1	2	3	4	5	1+2 Summed 10g SAR (W/kg)	3+4 Summed 10g SAR (W/kg)
	WLAN2.4GHz Ant 1 10g SAR (W/kg)	WLAN2.4GHz Ant 2 10g SAR (W/kg)	WLAN5GHz Ant 1 10g SAR (W/kg)	WLAN5GHz Ant 2 10g SAR (W/kg)	Bluetooth 10g SAR (W/kg)		
Front	0.082	0.035	0.024	0.044	0.002	0.117	0.068
Back	0.021	0.023	0.084	0.047	0.001	0.044	0.131
Left side	0.067	0.001	0.025	0.058	0.074	0.068	0.083
Right side	0.001	0.050	0.106	0.031	0.001	0.051	0.137
Bottom side	0.199	0.111	0.057	0.086	0.001	0.310	0.143

13.6 Hand Exposure Conditions for ZQ630

Exposure Position	1	2	3	4	5	1+2 Summed 1g SAR (W/kg)	3+4 Summed 1g SAR (W/kg)
	WLAN2.4GHz Ant 1 1g SAR (W/kg)	WLAN2.4GHz Ant 2 1g SAR (W/kg)	WLAN5GHz Ant 1 1g SAR (W/kg)	WLAN5GHz Ant 2 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)		
Front	0.025	0.063	0.178	0.101	0.008	0.088	0.279
Back	0.021	0.001	0.117	0.046	0.002	0.022	0.163
Left side	0.001	0.001	0.033	0.025	0.001	0.002	0.058
Right side	0.003	0.001	0.098	0.017	0.001	0.004	0.115
Bottom side	0.127	0.062	0.172	0.032	0.014	0.189	0.204
Back with Holster	0.011	0.001	0.077	0.015	0.001	0.012	0.092

Test Engineer : Bevis Chang and Kells Chen

14. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

15. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [8] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.



Appendix A. Plots of System Performance Check

The plots are shown as follows.



Appendix B. Plots of SAR Measurement

The plots are shown as follows.



Appendix C. DASY Calibration Certificate

The DASY calibration certificates are shown as follows.