


# RF TEST REPORT



Report No.: FCC\_RF\_SL14091201-ZBR-031\_BT\_DTS Rev1.1  
Supersede Report No.: FCC\_RF\_SL14091201-ZBR-031\_BT\_DTS Rev1.0

|                                                                                                                                      |                                                                     |                                                                                       |       |
|--------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------|
| Applicant                                                                                                                            | Zebra Technologies Corporation                                      |                                                                                       |       |
| Product Name                                                                                                                         | Bluetooth 4.0 LE Module                                             |                                                                                       |       |
| Model No.                                                                                                                            | BT40LE-ZQ500                                                        |                                                                                       |       |
| Test Standard                                                                                                                        | 47CFR15.247<br>RSS 210 ISSUE 8, Dec 2010, RSS Gen Issue 4, Nov 2014 |                                                                                       |       |
| Test Method                                                                                                                          | ANSI C63.4: 2014<br>558074 D01 DTS Meas Guidance V03r02             |                                                                                       |       |
| FCC ID                                                                                                                               | I28MD-ZBR7BTLE                                                      |                                                                                       |       |
| IC ID                                                                                                                                | 3798B-ZBR7BTLE                                                      |                                                                                       |       |
| Date of test                                                                                                                         | 12/01/2014 - 12/09/2014                                             |                                                                                       |       |
| Issue Date                                                                                                                           | 01/19/2015                                                          |                                                                                       |       |
| Test Result                                                                                                                          | <u>Pass</u> Fail                                                    |                                                                                       |       |
| Equipment complied with the specification                                                                                            |                                                                     |                                                                                       | [ x ] |
| Equipment did not comply with the specification                                                                                      |                                                                     |                                                                                       | [ ]   |
|                                                                                                                                      |                                                                     |                                                                                       |       |
|                                                                                                                                      |                                                                     |                                                                                       |       |
|                                                   |                                                                     |  |       |
| Ricky Wang                                                                                                                           |                                                                     | David Zhang                                                                           |       |
| Test Engineer                                                                                                                        |                                                                     | Engineer Reviewer                                                                     |       |
| This test report may be reproduced in full only<br>Test result presented in this test report is applicable to the tested sample only |                                                                     |                                                                                       |       |

Issued By:  
SIEMIC Laboratories  
775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: [www.siemic.com](http://www.siemic.com); Follow us at:



## Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

| Country/Region | Accreditation Body     | Scope                              |
|----------------|------------------------|------------------------------------|
| USA            | FCC, A2LA              | EMC , RF/Wireless , Telecom        |
| Canada         | IC, A2LA, NIST         | EMC, RF/Wireless , Telecom         |
| Taiwan         | BSMI , NCC , NIST      | EMC, RF, Telecom , Safety          |
| Hong Kong      | OFTA , NIST            | RF/Wireless ,Telecom               |
| Australia      | NATA, NIST             | EMC, RF, Telecom , Safety          |
| Korea          | KCC/RRR, NIST          | EMI, EMS, RF , Telecom, Safety     |
| Japan          | VCCI, JATE, TELEC, RFT | EMI, RF/Wireless, Telecom          |
| Mexico         | NOM, COFETEL, Caniety  | Safety, EMC , RF/Wireless, Telecom |
| Europe         | A2LA, NIST             | EMC, RF, Telecom , Safety          |
| Israel         | MOC, NIST              | EMC, RF, Telecom, Safety           |

### Accreditations for Product Certifications

| Country   | Accreditation Body | Scope                 |
|-----------|--------------------|-----------------------|
| USA       | FCC TCB, NIST      | EMC , RF , Telecom    |
| Canada    | IC FCB , NIST      | EMC , RF , Telecom    |
| Singapore | iDA, NIST          | EMC , RF , Telecom    |
| EU        | NB                 | EMC & R&TTE Directive |
| Japan     | MIC (RCB 208)      | RF , Telecom          |
| HongKong  | OFTA (US002)       | RF , Telecom          |

## **CONTENTS**

|                                            |                                                                    |           |
|--------------------------------------------|--------------------------------------------------------------------|-----------|
| <b>1</b>                                   | <b>REPORT REVISION HISTORY .....</b>                               | <b>3</b>  |
| <b>2</b>                                   | <b>EXECUTIVE SUMMARY .....</b>                                     | <b>4</b>  |
| <b>3</b>                                   | <b>CUSTOMER INFORMATION .....</b>                                  | <b>4</b>  |
| <b>4</b>                                   | <b>TEST SITE INFORMATION .....</b>                                 | <b>4</b>  |
| <b>5</b>                                   | <b>MODIFICATION .....</b>                                          | <b>4</b>  |
| <b>6</b>                                   | <b>EUT INFORMATION .....</b>                                       | <b>5</b>  |
| 6.1                                        | EUT Description .....                                              | 5         |
| 6.2                                        | Radio Description .....                                            | 5         |
| 6.3                                        | EUT test modes/configuration Description .....                     | 5         |
| 6.4                                        | EUT Photos .....                                                   | 6         |
| 6.5                                        | EUT Test Setup Photos .....                                        | 7         |
| <b>7</b>                                   | <b>SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION .....</b> | <b>8</b>  |
| 7.1                                        | Supporting Equipment .....                                         | 8         |
| 7.2                                        | Cabling Description .....                                          | 8         |
| 7.3                                        | Test Software Description .....                                    | 8         |
| <b>8</b>                                   | <b>TEST SUMMARY .....</b>                                          | <b>9</b>  |
| <b>9</b>                                   | <b>MEASUREMENT UNCERTAINTY .....</b>                               | <b>11</b> |
| <b>10</b>                                  | <b>MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....</b>         | <b>12</b> |
| 10.1                                       | Antenna Requirement .....                                          | 12        |
| 10.2                                       | Conducted Emission Test Result .....                               | 13        |
| 10.3                                       | RF Conducted Measurement .....                                     | 16        |
| 10.4                                       | Radiated Measurement .....                                         | 27        |
| <b>ANNEX A. TEST INSTRUMENT .....</b>      |                                                                    | <b>31</b> |
| <b>ANNEX B. SIEMIC ACCREDITATION .....</b> |                                                                    | <b>32</b> |

## 1 Report Revision History

| Report No.                              | Report Version | Description                         | Issue Date |
|-----------------------------------------|----------------|-------------------------------------|------------|
| FCC_RF_SL14091201-ZBR-031_BT_DTS        | Original       | NONE                                | 01/05/2015 |
| FCC_RF_SL14091201-ZBR-031_BT_DTS Rev1.0 | Rev1.0         | Update EUT and standard information | 01/13/2015 |
| FCC_RF_SL14091201-ZBR-031_BT_DTS Rev1.1 | Rev1.1         | Update RSS standard Version         | 01/19/2015 |
|                                         |                |                                     |            |
|                                         |                |                                     |            |
|                                         |                |                                     |            |

## 2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: Zebra Technologies Corporation  
Product: Bluetooth 4.0 LE Module  
Model: BT40LE-ZQ500

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1<sup>st</sup> page.

## 3 Customer information

|                      |   |                                                       |
|----------------------|---|-------------------------------------------------------|
| Applicant Name       | : | Zebra Technologies Corp.                              |
| Applicant Address    | : | 333 Corporate Woods Pkwy. Vernon Hills, IL 60061, USA |
| Manufacturer Name    | : | Zebra Technologies Corp.                              |
| Manufacturer Address | : | 333 Corporate Woods Pkwy. Vernon Hills, IL 60061, USA |

## 4 Test site information

|                      |   |                                             |
|----------------------|---|---------------------------------------------|
| Lab performing tests | : | SIEMIC Laboratories                         |
| Lab Address          | : | 775 Montague Expressway, Milpitas, CA 95035 |
| FCC Test Site No.    | : | 881796                                      |
| IC Test Site No.     | : | 4842D-2                                     |
| VCCI Test Site No.   | : | A0133                                       |

## 5 Modification

| Index | Item | Description | Note |
|-------|------|-------------|------|
| -     | -    | -           | -    |
|       |      |             |      |
|       |      |             |      |

## 6 EUT Information

### 6.1 EUT Description

|                           |   |                         |
|---------------------------|---|-------------------------|
| Product Name              | : | Bluetooth 4.0 LE Module |
| Model No.                 | : | BT40LE-ZQ500            |
| Trade Name                | : | ZEBRA                   |
| Serial No.                | : | GAN000244               |
| Input Power               | : | 5VDC                    |
| Power Adapter Manu/Model  | : | N/A                     |
| Power Adapter SN          | : | N/A                     |
| Hardware version          | : | N/A                     |
| Software version          | : | N/A                     |
| Date of EUT received      | : | 11/20/2014              |
| Equipment Class/ Category | : | DSS, DTS                |
| Clock Frequencies         | : | N/A                     |
| Port/Connectors           | : | N/A                     |


### 6.2 Radio Description

| Radio Type             | Bluetooth (Ver4.0+EDR)     |
|------------------------|----------------------------|
| Operating Frequency    | 2402MHz-2480MHz            |
| Modulation             | FHSS (BDR, EDR), DSSS (LE) |
| Channel Spacing        | 1MHz (BDR, EDR), 2MHz (LE) |
| Antenna Type           | Dipole                     |
| Antenna Gain           | 2.8 dBi (2.4GHz)           |
| Antenna Connector Type | U.FL connector             |


### 6.3 EUT test modes/configuration Description

| Mode      | Note                                |
|-----------|-------------------------------------|
| Bluetooth | BDR (GFSK), EDR (8-DPSK), LE (GFSK) |


## 6.4 EUT Photos

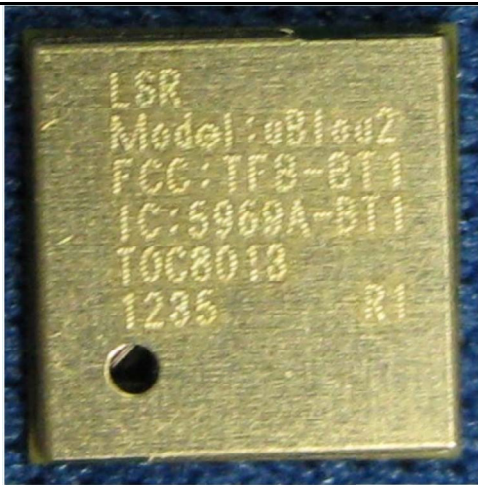


EUT - Top

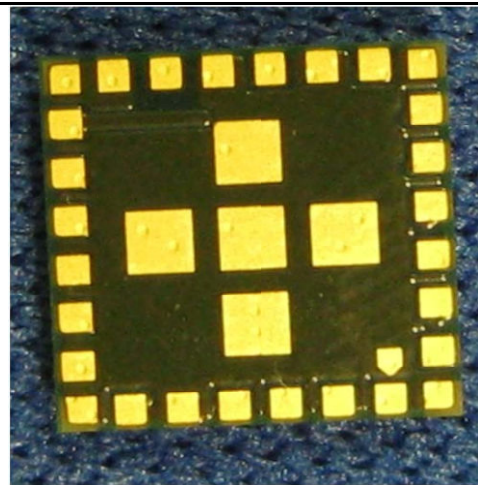

EUT - Bottom

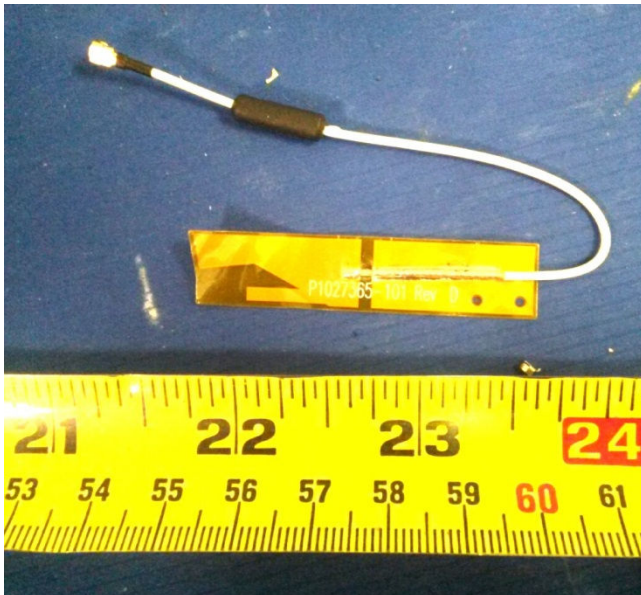

Antenna Top View

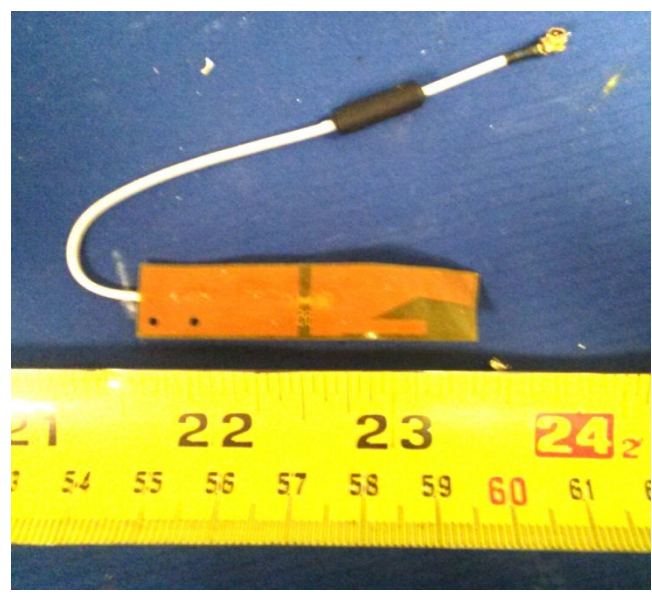


Antenna Bottom View


## 6.5 EUT Test Setup Photos



Conducted Emission Test setup - Front

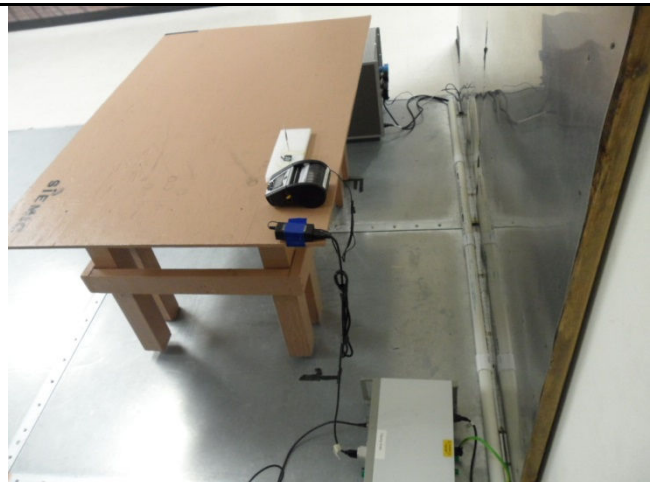

Conducted Emission Test setup - Rear

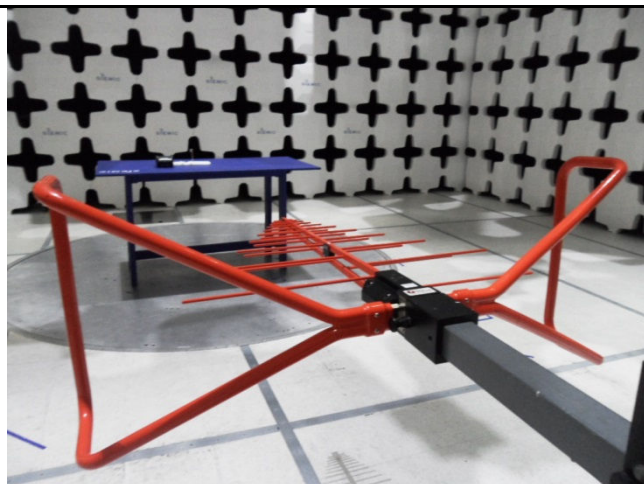

Radiated Emission Test Setup (30MHz-1GHz) - Front



Radiated Emission Test Setup (30MHz-1GHz) - Rear



Radiated Emission Test Setup (>1GHz) - Front



Radiated Emission Test Setup (>1GHz) - Rear

## 7 Supporting Equipment/Software and cabling Description

### 7.1 Supporting Equipment

| Index | Supporting Equipment Description | Model  | Serial No. | Manu  | Note |
|-------|----------------------------------|--------|------------|-------|------|
| 1     | Zebra Mobile Printer             | QLn420 | N/A        | Zebra | -    |
|       |                                  |        |            |       |      |

### 7.2 Cabling Description

| Name       | Connection Start |          | Connection Stop |          | Length / shielding Info |           | Note |
|------------|------------------|----------|-----------------|----------|-------------------------|-----------|------|
|            | From             | I/O Port | To              | I/O Port | Length (m)              | Shielding |      |
| Flat cable | Host             | -        | EUT             | -        | 0.1                     | NO        | -    |
| RF Cable   | EUT              | PLUG     | Antenna         | PLUG     | 0.1                     | NO        |      |

### 7.3 Test Software Description

| Test Item  | Software     | Description                                     |
|------------|--------------|-------------------------------------------------|
| RF Testing | Toolbox 1.71 | Set the EUT to different modulation and channel |

## 8 Test Summary

### General Technical Requirement

| Test Item                         | Test standard |                                    | Test Method/Procedure |                                                          | Pass / Fail                                                              |
|-----------------------------------|---------------|------------------------------------|-----------------------|----------------------------------------------------------|--------------------------------------------------------------------------|
| Restricted Band of Operation      | FCC           | 15.205                             | FCC                   | ANSI C63.4 – 2014<br>558074 D01 DTS Meas Guidance v03r02 | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
|                                   | IC            | RSS 210 ISSUE 8,<br>Dec 2010 (2.2) | IC                    | -                                                        |                                                                          |
| AC Conducted Emissions<br>Voltage | FCC           | 15.207(a)                          | FCC                   | ANSI C63.4 – 2014                                        | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
|                                   | IC            | RSS Gen Issue 4,<br>Nov 2014 (8.8) | IC                    | -                                                        |                                                                          |

### DSSS requirement

| Test Item                                    | Test standard |                                     | Test Method/Procedure |                                                          | Pass / Fail                                                              |
|----------------------------------------------|---------------|-------------------------------------|-----------------------|----------------------------------------------------------|--------------------------------------------------------------------------|
| Channel Separation                           | FCC           | 15.247 (a)(1)                       | FCC                   | -                                                        | <input type="checkbox"/> Pass<br><input checked="" type="checkbox"/> N/A |
|                                              | IC            | RSS 210 ISSUE 8,<br>Dec 2010 (A8.1) | IC                    | -                                                        |                                                                          |
| Occupied Bandwidth                           | FCC           | 15.247(a)(1)                        | FCC                   | -                                                        | <input type="checkbox"/> Pass<br><input checked="" type="checkbox"/> N/A |
|                                              | IC            | RSS 210 ISSUE 8,<br>Dec 2010 (A8.1) | IC                    | -                                                        |                                                                          |
| 6 dB Bandwidth                               | FCC           | 15.247(a)(2)                        | FCC                   | 558074 D01 DTS Meas Guidance v03r02                      | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
|                                              | IC            | RSS 210 ISSUE 8,<br>Dec 2010 (A8.2) | IC                    | -                                                        |                                                                          |
| Number of Hopping Channels                   | FCC           | 15.247(a)(1)                        | FCC                   | -                                                        | <input type="checkbox"/> Pass<br><input checked="" type="checkbox"/> N/A |
|                                              | IC            | RSS 210 ISSUE 8,<br>Dec 2010 (A8.1) | IC                    | -                                                        |                                                                          |
| Band Edge and Radiated<br>Spurious Emissions | FCC           | 15.247(d)                           | FCC                   | ANSI C63.4 – 2014<br>558074 D01 DTS Meas Guidance v03r02 | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
|                                              | IC            | RSS 210 ISSUE 8,<br>Dec 2010 (A8.5) | IC                    | -                                                        |                                                                          |
| Time of Occupancy                            | FCC           | 15.247(a)(1)                        | FCC                   | -                                                        | <input type="checkbox"/> Pass<br><input checked="" type="checkbox"/> N/A |
|                                              | IC            | RSS 210 ISSUE 8,<br>Dec 2010 (A8.1) | IC                    | -                                                        |                                                                          |
| Output Power                                 | FCC           | 15.247(b)                           | FCC                   | 558074 D01 DTS Meas Guidance v03r02                      | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
|                                              | IC            | RSS 210 ISSUE 8,<br>Dec 2010 (A8.4) | IC                    | -                                                        |                                                                          |
| Receiver Spurious Emissions                  | FCC           | 15.247(d)                           | FCC                   | -                                                        | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
|                                              | IC            | RSS Gen Issue 4,<br>Nov 2014 (7.1)  | IC                    | -                                                        |                                                                          |
| Antenna Gain > 6 dBi                         | FCC           | 15.247(e)                           | FCC                   | -                                                        | <input type="checkbox"/> Pass<br><input checked="" type="checkbox"/> N/A |
|                                              | IC            | RSS 210 ISSUE 8,<br>Dec 2010 (A8.4) | IC                    | -                                                        |                                                                          |
| Power Spectral Density                       | FCC           | 15.247(e)                           | FCC                   | 558074 D01 DTS Meas Guidance v03r02                      | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
|                                              | IC            | RSS 210 ISSUE 8,<br>Dec 2010 (A8.3) | IC                    | -                                                        |                                                                          |
| Hybrid System Requirement                    | FCC           | 15.247(f)                           | FCC                   | -                                                        | <input type="checkbox"/> Pass<br><input checked="" type="checkbox"/> N/A |
|                                              | IC            | RSS 210 ISSUE 8,<br>Dec 2010 (A8.3) | IC                    | -                                                        |                                                                          |
| Hopping Capability                           | FCC           | 15.247(g)                           | FCC                   | -                                                        | <input type="checkbox"/> Pass<br><input checked="" type="checkbox"/> N/A |
|                                              | IC            | RSS 210 ISSUE 8,<br>Dec 2010 (A8.1) | IC                    | -                                                        |                                                                          |
| Hopping Coordination<br>Requirement          | FCC           | 15.247(h)                           | FCC                   | -                                                        | <input type="checkbox"/> Pass<br><input checked="" type="checkbox"/> N/A |
|                                              | IC            | RSS 210 ISSUE 8,<br>Dec 2010 (A8.1) | IC                    | -                                                        |                                                                          |

|                         |                                                                                                                                                                                                                                                                                                      |     |                                    |     |   |                                                                          |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|------------------------------------|-----|---|--------------------------------------------------------------------------|
| RF Exposure requirement |                                                                                                                                                                                                                                                                                                      | FCC | 15.247(i)                          | FCC | - | <input type="checkbox"/> Pass<br><input checked="" type="checkbox"/> N/A |
|                         |                                                                                                                                                                                                                                                                                                      | IC  | RSS Gen Issue 4,<br>Nov 2014 (3.2) | IC  | - |                                                                          |
| Remark                  | 1. All measurement uncertainties do not take into consideration for all presented test results.<br>2. The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual. |     |                                    |     |   |                                                                          |

## 9 Measurement Uncertainty

| Test Item                                 | Frequency Range | Description                                                                                                                                     | Uncertainty   |
|-------------------------------------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| AC Conducted Emissions Voltage            | 150KHz – 30MHz  | Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2                                 | ±3.5dB        |
| 6 dB & 26 dB & 99% Bandwidth              | 30MHz – 40GHz   |                                                                                                                                                 | ±1.5dB        |
| Maximum conducted output power            | 30MHz – 40GHz   |                                                                                                                                                 | ±1.5dB        |
| Maximum peak spectral density             | 30MHz – 40GHz   |                                                                                                                                                 | ±1.5dB        |
| Peak Excursion Ratio                      | 30MHz – 40GHz   |                                                                                                                                                 |               |
| Band Edge and Radiated Spurious Emissions | 30MHz – 1GHz    | Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m) | +5.6dB/-4.5dB |
| Band Edge and Radiated Spurious Emissions | 1GHz – 40GHz    | Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m) | +4.3dB/-4.1dB |

## 10 Measurements, examination and derived results


### 10.1 Antenna Requirement

| Spec    | Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Applicable                          |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| §15.203 | <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.</p> <p>Antenna requirement must meet at least one of the following:</p> <p>a) Antenna must be permanently attached to the device.<br/> b) Antenna must use a unique type of connector to attach to the device.<br/> c) Device must be professionally installed. Installer shall be responsible for ensuring that the correct antenna is employed with the device.</p> | <input checked="" type="checkbox"/> |
| Remark  | The BT antenna is integral to the PCB board permanently to the device which meets the requirement (See Internal Photographs submitted as another Exhibit).                                                                                                                                                                                                                                                                                                                                                                     |                                     |
| Result  | <input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                     |

## 10.2 Conducted Emission Test Result

### Conducted Emission Limit

| Frequency ranges<br>(MHz) | Limit (dBuV) |         |
|---------------------------|--------------|---------|
|                           | QP           | Average |
| 0.15 ~ 0.5                | 66 – 56      | 56 – 46 |
| 0.5 ~ 5                   | 56           | 46      |
| 5 ~ 30                    | 60           | 50      |

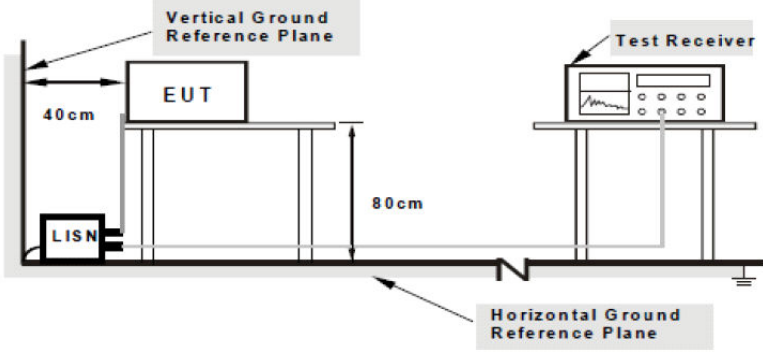
| Spec                                  | Item                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                      | Applicable                          |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| § 15.207, RSS 210 ISSUE 8 :2010(A8.1) | a)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits set in § 15.207, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN).<br>AC Line conducted emission within the band 150KHz to 30MHz | <input checked="" type="checkbox"/> |
| Test Setup                            |  <p>Note: 1.Support units were connected to second LISN.<br/>2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                     |
| Procedure                             | <ul style="list-style-type: none"> <li>- The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B.</li> <li>- The power supply for the EUT was fed through a 50<math>\Omega</math>/50<math>\mu</math>H EUT LISN, connected to filtered mains.</li> <li>- The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.</li> <li>- All other supporting equipment were powered separately from another main supply.</li> </ul> |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                     |
| Remark                                | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                     |
| Result                                | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                     |

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A


## Test Result

|                      |                      |      |         |      |
|----------------------|----------------------|------|---------|------|
| Test specification:  | 47CFR15.247          |      |         |      |
| Environ Conditions:  | Temp(°C):            | 22   | Result: | Pass |
|                      | Humidity (%):        | 45   |         |      |
|                      | Atmospheric(mPa):    | 1021 |         |      |
| Voltage/Line & Phase | 110VAC, 60Hz/Neutral |      |         |      |
| Test Date:           | 12/11/2014           |      |         |      |
| Tested by:           | Teody Mnansala       |      |         |      |
| Remarks:             | None                 |      |         |      |

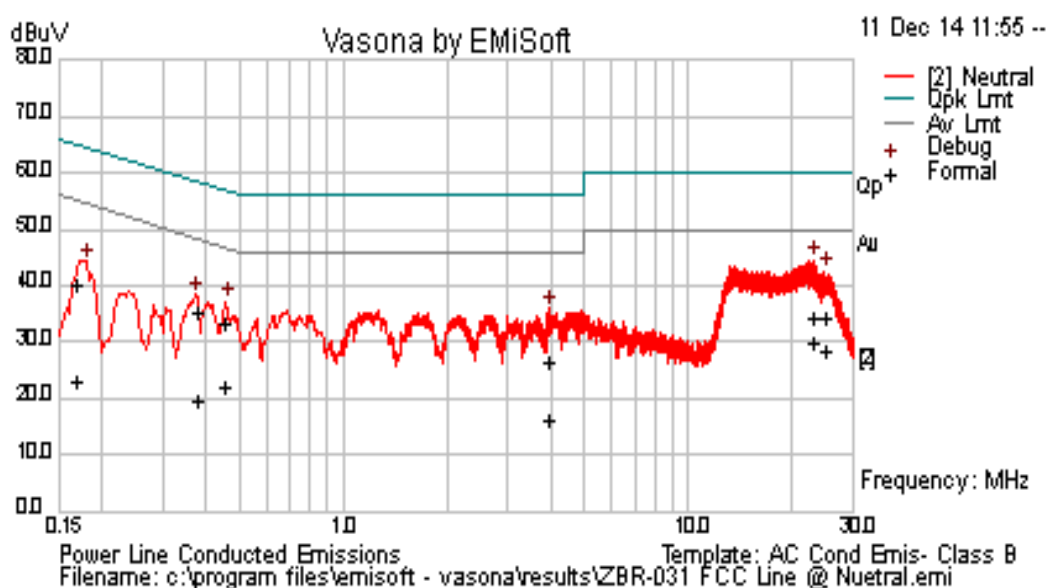

| Frequency MHz | Raw dBuV | Cable Loss | Factors dB | Level dBuV | Measurement Type | Line    | Limit dBuV | Margin dB | Pass /Fail |
|---------------|----------|------------|------------|------------|------------------|---------|------------|-----------|------------|
| 0.45          | 22.77    | 10.01      | 0.73       | 33.51      | Quasi Peak       | Neutral | 56.80      | -23.29    | Pass       |
| 0.37          | 24.35    | 10.01      | 0.72       | 35.08      | Quasi Peak       | Neutral | 58.39      | -23.32    | Pass       |
| 0.17          | 29.40    | 10.00      | 0.75       | 40.15      | Quasi Peak       | Neutral | 65.00      | -24.85    | Pass       |
| 24.76         | 21.94    | 10.08      | 2.27       | 34.28      | Quasi Peak       | Neutral | 60.00      | -25.72    | Pass       |
| 23.09         | 21.78    | 10.07      | 2.27       | 34.12      | Quasi Peak       | Neutral | 60.00      | -25.88    | Pass       |
| 3.96          | 15.46    | 10.03      | 1.08       | 26.57      | Quasi Peak       | Neutral | 56.00      | -29.43    | Pass       |
| 23.09         | 17.72    | 10.07      | 2.27       | 30.06      | Average          | Neutral | 50.00      | -19.94    | Pass       |
| 24.76         | 16.16    | 10.08      | 2.27       | 28.51      | Average          | Neutral | 50.00      | -21.49    | Pass       |
| 0.45          | 11.47    | 10.01      | 0.73       | 22.21      | Average          | Neutral | 46.80      | -24.59    | Pass       |
| 0.37          | 9.08     | 10.01      | 0.72       | 19.81      | Average          | Neutral | 48.39      | -28.59    | Pass       |
| 3.96          | 5.31     | 10.03      | 1.08       | 16.42      | Average          | Neutral | 46.00      | -29.58    | Pass       |
| 0.17          | 12.41    | 10.00      | 0.75       | 23.16      | Average          | Neutral | 55.00      | -31.84    | Pass       |

|                      |                   |      |         |      |
|----------------------|-------------------|------|---------|------|
| Test specification:  | ANSI C63.10       |      |         |      |
| Environ Conditions:  | Temp(°C):         | 22   | Result: | Pass |
|                      | Humidity (%):     | 45   |         |      |
|                      | Atmospheric(mPa): | 1021 |         |      |
| Voltage/Line & Phase | 110VAC, 60Hz/Line |      |         |      |
| Test Date:           | 12/11/2014        |      |         |      |
| Tested by:           | Teody Mnansala    |      |         |      |
| Remarks:             | None              |      |         |      |

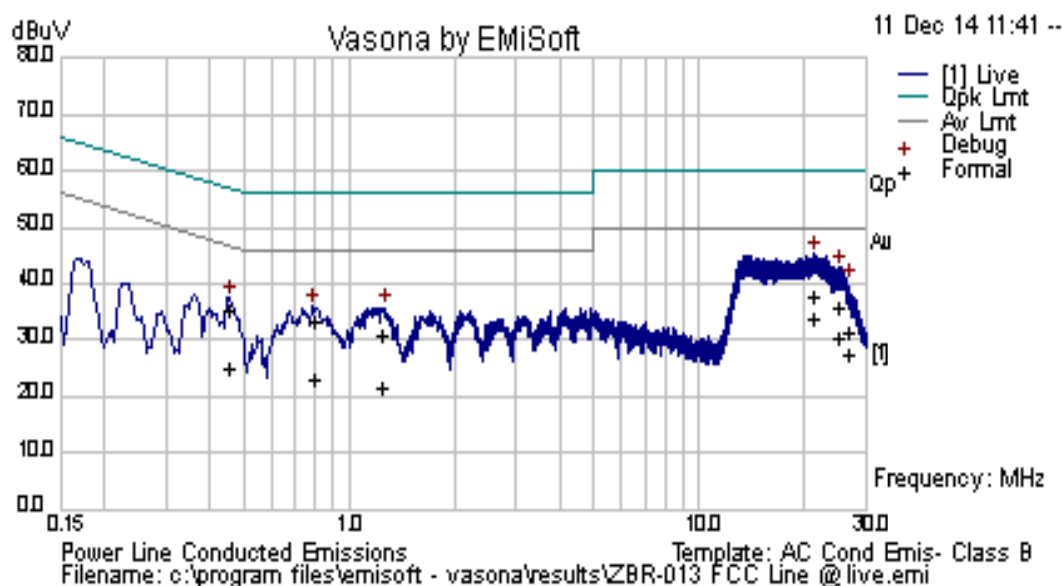

| Frequency MHz | Raw dBuV | Cable Loss | Factors dB | Level dBuV | Measurement Type | Line | Limit dBuV | Margin dB | Pass /Fail |
|---------------|----------|------------|------------|------------|------------------|------|------------|-----------|------------|
| 0.45          | 24.53    | 10.01      | 0.73       | 35.27      | Quasi Peak       | Line | 56.84      | -21.57    | Pass       |
| 21.34         | 25.26    | 10.07      | 2.27       | 37.60      | Quasi Peak       | Line | 60.00      | -22.40    | Pass       |
| 0.80          | 22.42    | 10.01      | 0.76       | 33.19      | Quasi Peak       | Line | 56.00      | -22.81    | Pass       |
| 25.06         | 23.45    | 10.08      | 2.27       | 35.80      | Quasi Peak       | Line | 60.00      | -24.20    | Pass       |
| 1.24          | 19.85    | 10.02      | 0.82       | 30.69      | Quasi Peak       | Line | 56.00      | -25.31    | Pass       |
| 26.61         | 18.84    | 10.08      | 2.27       | 31.20      | Quasi Peak       | Line | 60.00      | -28.80    | Pass       |
| 21.34         | 21.70    | 10.07      | 2.27       | 34.04      | Average          | Line | 50.00      | -15.96    | Pass       |
| 25.06         | 18.00    | 10.08      | 2.27       | 30.35      | Average          | Line | 50.00      | -19.65    | Pass       |
| 0.45          | 14.38    | 10.01      | 0.73       | 25.12      | Average          | Line | 46.84      | -21.73    | Pass       |
| 26.61         | 14.91    | 10.08      | 2.27       | 27.26      | Average          | Line | 50.00      | -22.74    | Pass       |
| 0.80          | 12.07    | 10.01      | 0.76       | 22.84      | Average          | Line | 46.00      | -23.16    | Pass       |
| 1.24          | 10.73    | 10.02      | 0.82       | 21.57      | Average          | Line | 46.00      | -24.43    | Pass       |

### 10.3 RF Conducted Measurement

#### 10.3.1 6dB Bandwidth –DSSS(Bluetooth LE)

##### Requirement(s):

| Spec                                            | Item                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Requirement                                                                           | Applicable                                                                 |
|-------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------------------------------------------|
| 47CFR§15.247<br>RSS 210 ISSUE<br>8 :2010 (A8.2) | a)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | For digitally modulated systems, the minimum 6dB bandwidth shall be at least 500 kHz. | <input checked="" type="checkbox"/>                                        |
| Test Setup                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                       |                                                                            |
| Test Procedure                                  | 558074 D01 DTS Meas Guidance v03r02, 8.1 DTS bandwidth<br><br><u>6dB Emission bandwidth measurement procedure</u> <ul style="list-style-type: none"> <li>- Set RBW = 100 kHz.</li> <li>- Set the video bandwidth (VBW) <math>\geq 3 \times</math> RBW.</li> <li>- Detector = Peak.</li> <li>- Trace mode = max hold.</li> <li>- Sweep = auto couple.</li> <li>- Allow the trace to stabilize.</li> <li>- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.</li> </ul> |                                                                                       |                                                                            |
| Test Date                                       | 12/02/2014                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Environmental condition                                                               | Temperature 21°C<br>Relative Humidity 46%<br>Atmospheric Pressure 1019mbar |
| Remark                                          | NONE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                       |                                                                            |
| Result                                          | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                       |                                                                            |

##### Equipment Setting

| TEST               | RBW                              | VBW     | SPAN | Detector | SWEEP | Trace   | NOTES |
|--------------------|----------------------------------|---------|------|----------|-------|---------|-------|
| 6 dB DTS Bandwidth | 1-5% of DTS BW ( $\leq 100$ KHz) | 3 x RBW | >EBW | Peak     | Auto  | Maxhold | -     |

Test Data    ☒ Yes      ☐ N/A

Test Plot    ☒ Yes      ☐ N/A


### 6dB Bandwidth Test Result

| Type   | Freq (MHz) | Test mode    | CH   | Result (MHz) | Limit (MHz) | Result |
|--------|------------|--------------|------|--------------|-------------|--------|
| 6dB BW | 2402       | Bluetooth LE | Low  | 0.669        | ≥0.5        | Pass   |
| 6dB BW | 2426       | Bluetooth LE | Mid  | 0.672        | ≥0.5        | Pass   |
| 6dB BW | 2480       | Bluetooth LE | High | 0.702        | ≥0.5        | Pass   |

### 99% Bandwidth Test Result

| Type    | Freq (MHz) | Test mode | CH   | 99% Bandwidth (MHz) |
|---------|------------|-----------|------|---------------------|
| 99% OBW | 2402       | BDR       | Low  | 0.998               |
| 99% OBW | 2426       | BDR       | Mid  | 1.019               |
| 99% OBW | 2480       | BDR       | High | 1.021               |


## Test Plots

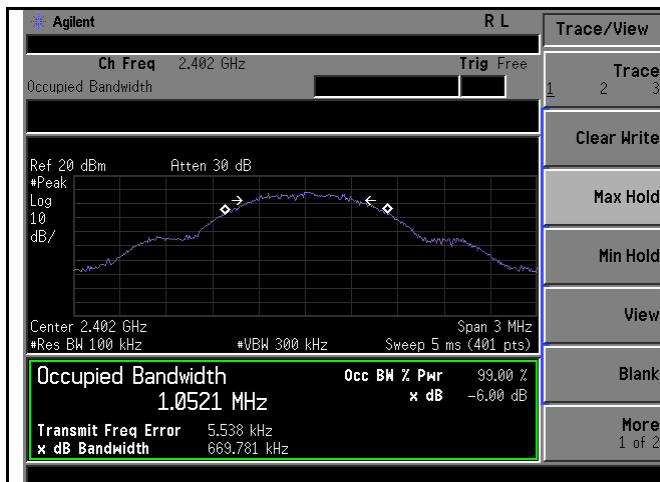


6dB BW-2402-BT LE




6dB BW -2426- BT LE

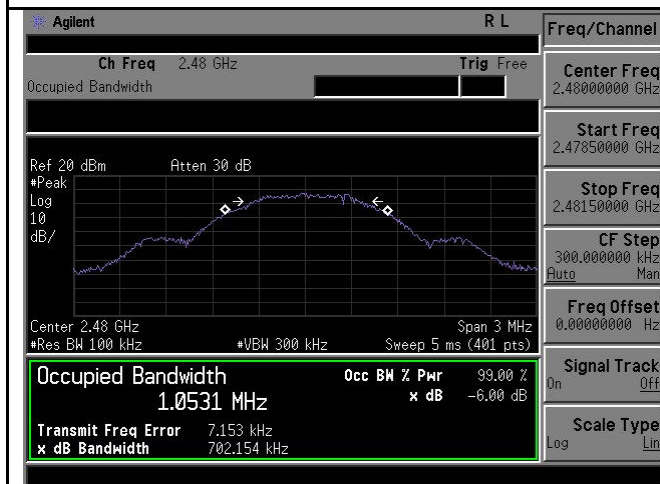

6dB BW-2480- BT LE

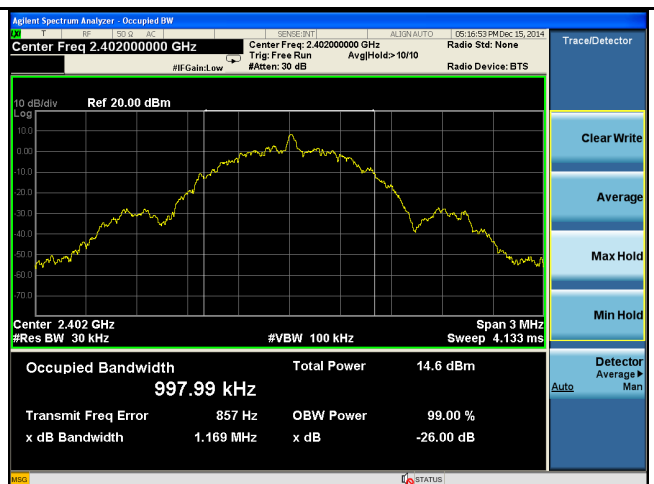

99% BW-2402-BT LE

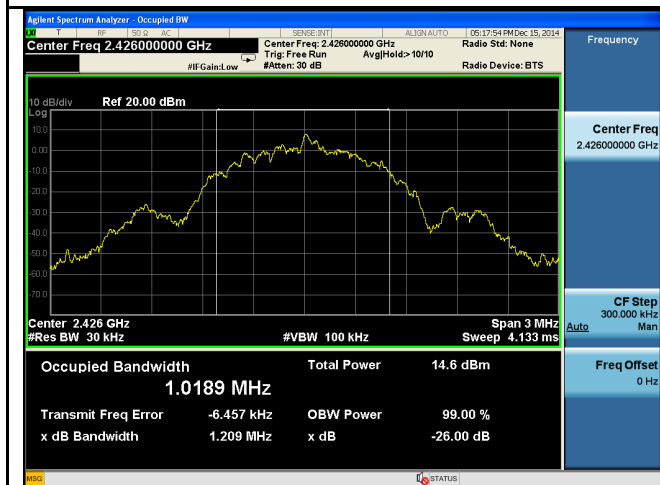

99% BW-2426-BT LE



99% BW -2480- BT LE

### 10.3.2 Peak Spectral Density – DSSS(Bluetooth LE)

#### Requirement(s):

| Spec                                      | Item                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Requirement                                                                                                                                                                                                                  | Applicable                                                                 |
|-------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|
| § 15.247(e), RSS 210 ISSUE 8 :2010 (A8.3) | a)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission. | <input checked="" type="checkbox"/>                                        |
| Test Setup                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                              |                                                                            |
| Test Procedure                            | 558074 D01 DTS Meas Guidance v03r02, 10.2 Method PKPSD (peak PSD)<br><u>Peak spectral density measurement procedure</u> <ul style="list-style-type: none"> <li>- Set analyzer center frequency to DTS channel center frequency.</li> <li>- Set the span to 1.5 times the DTS bandwidth.</li> <li>- Set the RBW to: <math>3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}</math>.</li> <li>- Set the VBW <math>\geq 3 \times \text{RBW}</math>.</li> <li>- Detector = peak.</li> <li>- Sweep time = auto couple.</li> <li>- Trace mode = max hold.</li> <li>- Allow trace to fully stabilize.</li> <li>- Use the peak marker function to determine the maximum amplitude level within the RBW.</li> <li>- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.</li> </ul> |                                                                                                                                                                                                                              |                                                                            |
| Test Date                                 | 12/03/2014                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Environmental condition                                                                                                                                                                                                      | Temperature 21°C<br>Relative Humidity 46%<br>Atmospheric Pressure 1019mbar |
| Remark                                    | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                              |                                                                            |
| Result                                    | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                              |                                                                            |

#### Equipment Setting

| TEST | RBW  | VBW                        | SPAN        | Detector | SWEEP | Trace   | NOTES |
|------|------|----------------------------|-------------|----------|-------|---------|-------|
| PSD  | 3KHz | $\geq 3 \times \text{RBW}$ | 1.5x DTS BW | Peak     | Auto  | Maxhold | -     |


Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes ☐ N/A


### PSD Test Result

| Type        | Freq (MHz) | Test mode    | CH   | Conducted PSD (dBm/MHz) | Limit (dBm/MHz) | Result |
|-------------|------------|--------------|------|-------------------------|-----------------|--------|
| Maximum PSD | 2402       | Bluetooth LE | Low  | -1.212                  | ≤8              | Pass   |
| Maximum PSD | 2426       | Bluetooth LE | Mid  | -1.694                  | ≤8              | Pass   |
| Maximum PSD | 2480       | Bluetooth LE | High | -2.151                  | ≤8              | Pass   |


### Test Plots

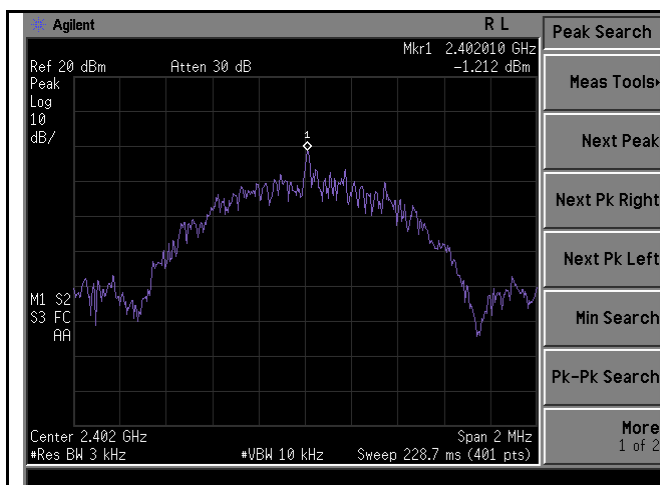

BT LE-2402-PSD

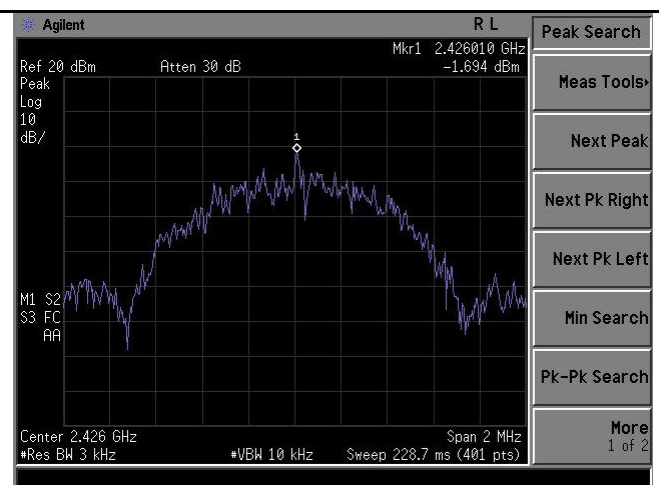

BT LE-2426-PSD

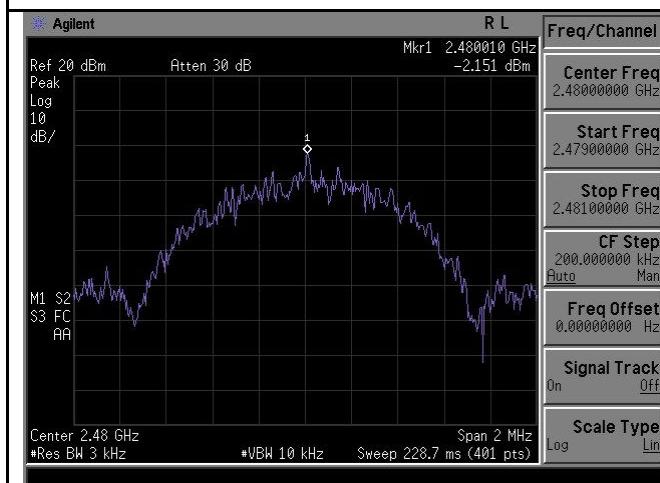

BT LE-2480-PSD

### 10.3.3 Peak Output Power – DSSS(Bluetooth LE)

#### Requirement(s):

| Spec                                               | Item                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Requirement                                                                                       | Applicable                                                                 |
|----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|
| § 15.247(b) (2)<br>RSS 210 ISSUE<br>8 :2010 (A8.4) | a)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | For systems using digital modulation in the 2400-2483.5MHz, and 5725-5850MHz bands: below 1 Watt. | <input checked="" type="checkbox"/>                                        |
|                                                    | b)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Power reduction (antenna gain > 6dBi)                                                             | <input checked="" type="checkbox"/>                                        |
| Test Setup                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                   |                                                                            |
| Test Procedure                                     | <p>558074 D01 DTS Meas Guidance v03r02, 9.1.2 Integrated band power method</p> <p><u>Maximum output power measurement procedure</u></p> <ul style="list-style-type: none"> <li>- Set the RBW = 1 MHz.</li> <li>- Set the VBW ≥ 3x RBW</li> <li>- Set the span ≥ 1.5 x DTS bandwidth.</li> <li>- Detector = peak.</li> <li>- Sweep time = auto couple.</li> <li>- Trace mode = max hold.</li> <li>- Allow trace to fully stabilize.</li> <li>- Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.</li> </ul> |                                                                                                   |                                                                            |
| Test Date                                          | 12/03/2014                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Environmental condition                                                                           | Temperature 21°C<br>Relative Humidity 46%<br>Atmospheric Pressure 1019mbar |
| Remark                                             | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                   |                                                                            |
| Result                                             | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                   |                                                                            |

#### Equipment Setting

| TEST              | RBW  | VBW   | SPAN          | Detector | SWEEP | Trace   | NOTES |
|-------------------|------|-------|---------------|----------|-------|---------|-------|
| Peak output power | 1MHz | ≥3MHz | ≥1.5 x DTS BW | Peak     | Auto  | Maxhold | -     |


Test Data    ☒ Yes      ☐ N/A

Test Plot    ☒ Yes      ☐ N/A

### Peak Output Power Test Result

| Type         | Freq (MHz) | Test mode    | CH   | Conducted Power (dBm) | Limit (dBm) | Result |
|--------------|------------|--------------|------|-----------------------|-------------|--------|
| Output power | 2402       | Bluetooth LE | Low  | 8.357                 | 30          | Pass   |
| Output power | 2426       | Bluetooth LE | Mid  | 8.059                 | 30          | Pass   |
| Output power | 2480       | Bluetooth LE | High | 7.975                 | 30          | Pass   |

### Test Plots

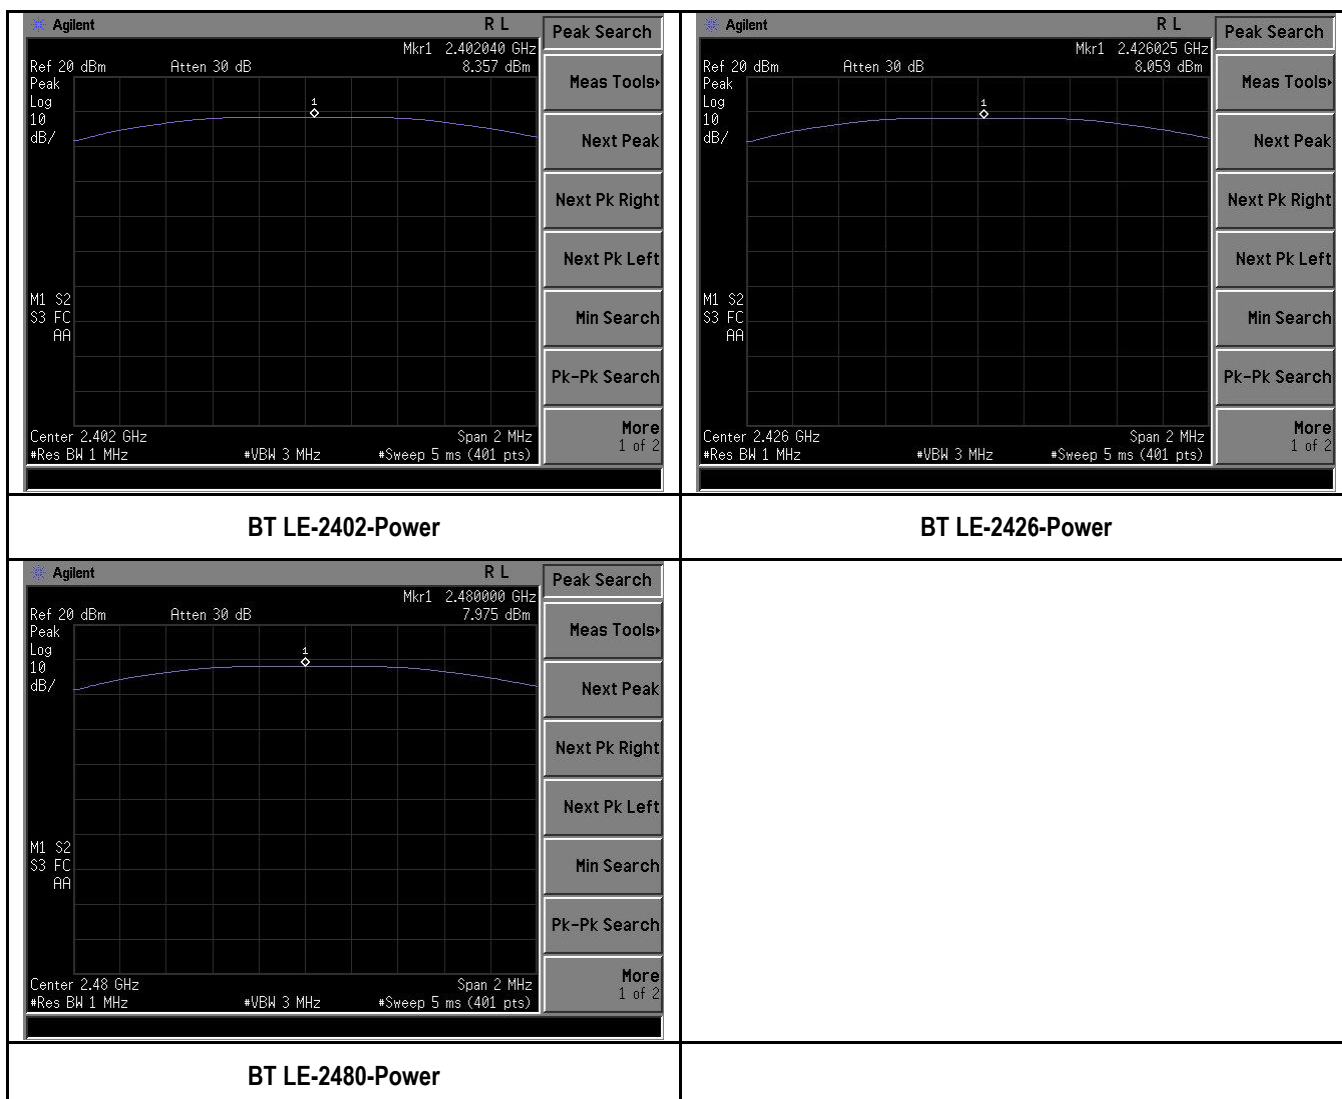

### 10.3.4 Band Edge –DSSS(Bluetooth LE)

#### Requirement(s):

| Spec                                               | Item                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Applicable                                                                 |
|----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|
| 47CFR§15.247(d),<br>RSS 210 ISSUE 8<br>:2010(A8.5) | d)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209 (a) is not required<br><br><input checked="" type="checkbox"/> 20 dB down <input type="checkbox"/> 30 dB down | <input checked="" type="checkbox"/>                                        |
| Test Setup                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                            |
| Test Procedure                                     | 558074 D01 DTS Meas Guidance v03r02<br><br><u>Band Edge measurement procedure</u><br><br>1. Set the EUT to maximum power setting and enable the EUT transmit continuously.<br>2. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as a measured. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.<br>3. Change modulation and channel bandwidth then repeat step 1 to 2.<br>4. Measured and record the results in the test report. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                            |
| Test Date                                          | 12/05/2014                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Environmental condition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Temperature 22°C<br>Relative Humidity 46%<br>Atmospheric Pressure 1020mbar |
| Remark                                             | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                            |
| Result                                             | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                            |


#### Equipment Setting

| TEST      | RBW    | VBW      | Detector | SWEEP | Trace   | NOTES |
|-----------|--------|----------|----------|-------|---------|-------|
| Band Edge | 100KHz | ≥3 x RBW | Peak     | Auto  | Maxhold | -     |


Test Data    ☐ Yes      ☒ N/A

Test Plot    ☒ Yes      ☐ N/A

#### Test Plots

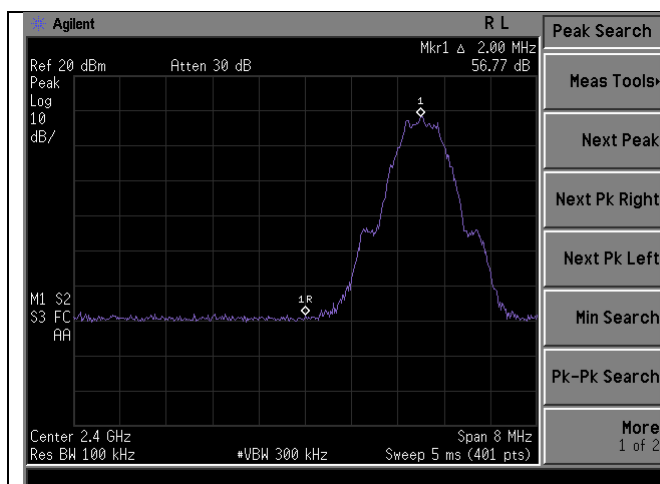

**Band Edge-BT LE-Low**

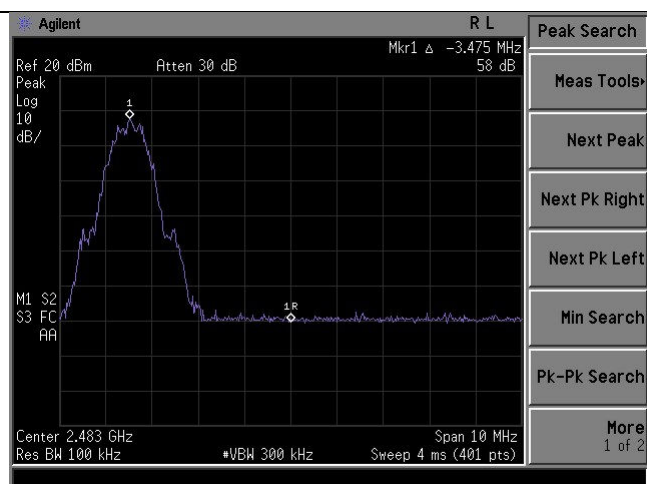

**Band Edge-BT LE-High**

### Radiated Restricted Band


| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|
| 2483.50       | 15.81    | 2.15       | 28.75 | 46.71        | Peak Max         | H   | 121.00 | 205.00  | 54.00        | -7.29     | Pass       |

Note: Both horizontal and vertical polarities have been verified.

## 10.4 Radiated Measurement

### 10.4.1 Radiated Measurement below 1GHz


#### Requirement(s):
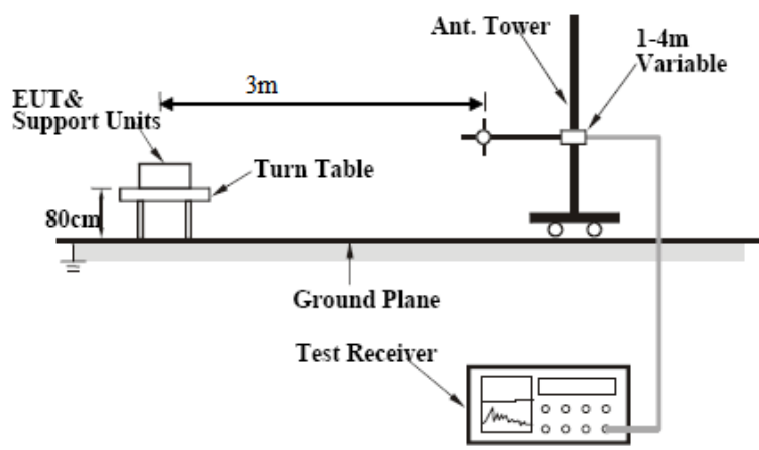
| Spec                                               | Item                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Applicable            |                       |         |     |          |     |         |     |           |     |                                     |
|----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|---------|-----|----------|-----|---------|-----|-----------|-----|-------------------------------------|
| 47CFR§15.247(d),<br>RSS 210 ISSUE 8<br>:2010(A8.5) | a)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table><tr><th>Frequency range (MHz)</th><th>Field Strength (uV/m)</th></tr><tr><td>30 – 88</td><td>100</td></tr><tr><td>88 – 216</td><td>150</td></tr><tr><td>216 960</td><td>200</td></tr><tr><td>Above 960</td><td>500</td></tr></table> | Frequency range (MHz) | Field Strength (uV/m) | 30 – 88 | 100 | 88 – 216 | 150 | 216 960 | 200 | Above 960 | 500 | <input checked="" type="checkbox"/> |
| Frequency range (MHz)                              | Field Strength (uV/m)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                       |                       |         |     |          |     |         |     |           |     |                                     |
| 30 – 88                                            | 100                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                       |                       |         |     |          |     |         |     |           |     |                                     |
| 88 – 216                                           | 150                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                       |                       |         |     |          |     |         |     |           |     |                                     |
| 216 960                                            | 200                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                       |                       |         |     |          |     |         |     |           |     |                                     |
| Above 960                                          | 500                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                       |                       |         |     |          |     |         |     |           |     |                                     |
| Test Setup                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                       |                       |         |     |          |     |         |     |           |     |                                     |
| Procedure                                          | <ol style="list-style-type: none"><li>1. The EUT was switched on and allowed to warm up to its normal operating condition.</li><li>2. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:<ol style="list-style-type: none"><li>a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li><li>b. The EUT was then rotated to the direction that gave the maximum emission.</li><li>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</li></ol></li><li>3. A Quasi-peak measurement was then made for that frequency point.</li><li>4. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</li></ol> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                       |                       |         |     |          |     |         |     |           |     |                                     |
| Remark                                             | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                       |                       |         |     |          |     |         |     |           |     |                                     |
| Result                                             | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                       |                       |         |     |          |     |         |     |           |     |                                     |

Test Data    ☒ Yes      ☐ N/A

Test Plot    ☒ Yes      ☐ N/A


|                     |                   |      |         |      |
|---------------------|-------------------|------|---------|------|
| Test specification: | ANSI C63.10       |      |         |      |
| Environ Conditions: | Temp(°C):         | 22   | Result: | Pass |
|                     | Humidity (%):     | 45   |         |      |
|                     | Atmospheric(mPa): | 1021 |         |      |
| Mains Power:        | 110VAC, 60Hz      |      |         |      |
| Test Date:          | 12/14/2014        |      |         |      |
| Tested by:          | Teody Mnansala    |      |         |      |
| Remarks:            | None              |      |         |      |
| Frequency Range:    | 30 MHz – 1000 MHz |      |         |      |

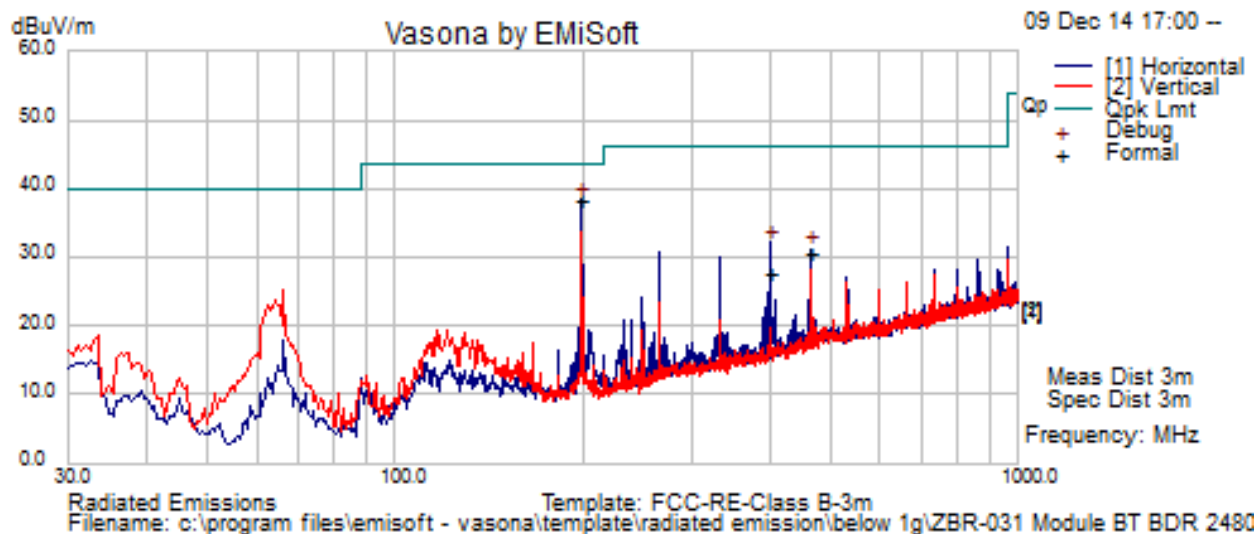

| Frequency MHz | Raw dBuV | Cable Loss | AF dB  | Level dBuV | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV | Margin dB |
|---------------|----------|------------|--------|------------|------------------|-----|--------|---------|------------|-----------|
| 199.50        | 62.73    | 2.50       | -26.94 | 38.29      | Quasi Max        | H   | 145.00 | 106.00  | 43.50      | -5.21     |
| 399.00        | 48.45    | 3.33       | -24.11 | 27.67      | Quasi Max        | H   | 102.00 | 30.00   | 46.00      | -18.33    |
| 465.50        | 49.28    | 3.89       | -22.63 | 30.54      | Quasi Max        | H   | 180.00 | 165.00  | 46.00      | -15.46    |

## 10.4.2 Radiated Spurious Emissions > 1GHz

### Requirement(s):

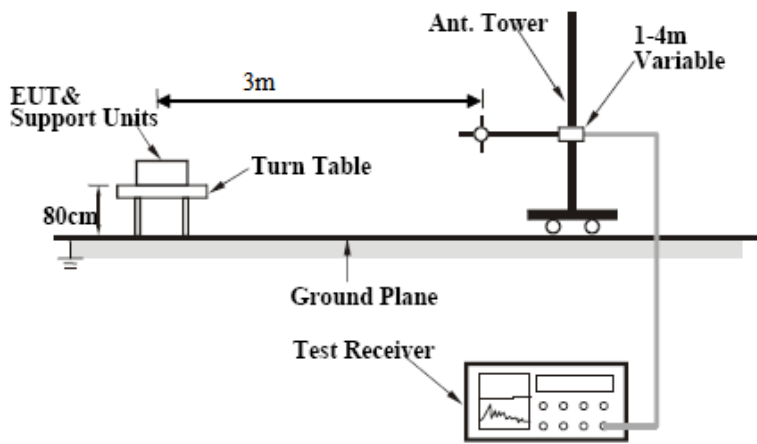
| Spec                                               | Item                                                                                  | Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Applicable                          |
|----------------------------------------------------|---------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| 47CFR§15.247(d),<br>RSS 210 ISSUE 8<br>:2010(A8.5) | a)                                                                                    | For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used.<br>Attenuation below the general limits specified in § 15.209(a) is not required<br><input checked="" type="checkbox"/> 20 dB down <input type="checkbox"/> 30 dB down                                                                                                                                                                                                                                                                                                 | <input checked="" type="checkbox"/> |
|                                                    | b)                                                                                    | or restricted band, emission must also comply with the radiated emission limits specified in 15.209                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <input checked="" type="checkbox"/> |
| Test Setup                                         |    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                     |
| Procedure                                          | 1. 2.                                                                                 | <p>The EUT was switched on and allowed to warm up to its normal operating condition.</p> <p>The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarisation, and adjusting the antenna height in the following manner:</p> <ol style="list-style-type: none"> <li>Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>The EUT was then rotated to the direction that gave the maximum emission.</li> <li>Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> <p>An average measurement was then made for that frequency point.</p> <p>Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p> |                                     |
| Remark                                             | All peak detection results are under average limits. So formal scans are unnecessary. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                     |
| Result                                             | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                     |

Test Data    ☐ Yes    ☒ N/A


Test Plot    ☒ Yes    ☐ N/A

## Test Result for Bluetooth-LE Mode


### Low Channel @ 2402MHz @ 3 Meter

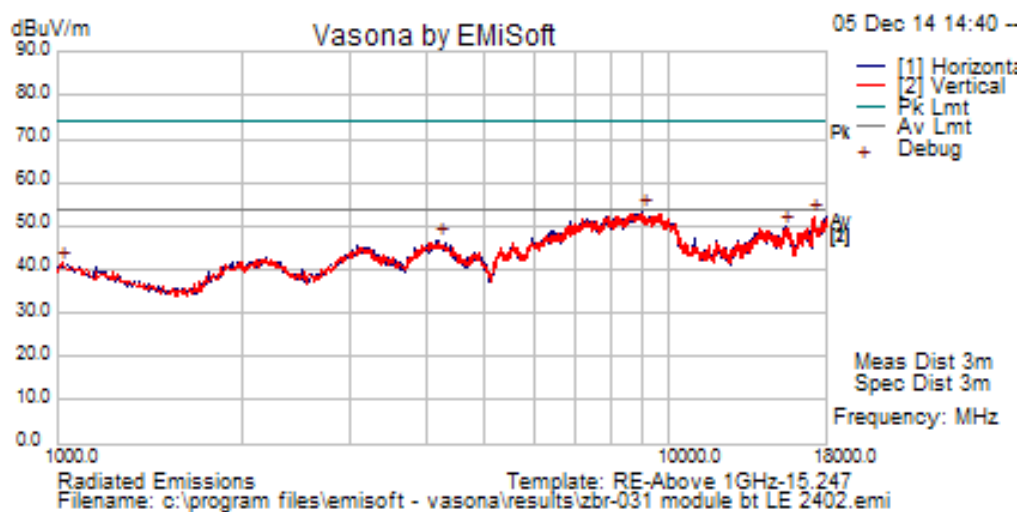

### Mid Channel @ 2426MHz @ 3 Meter

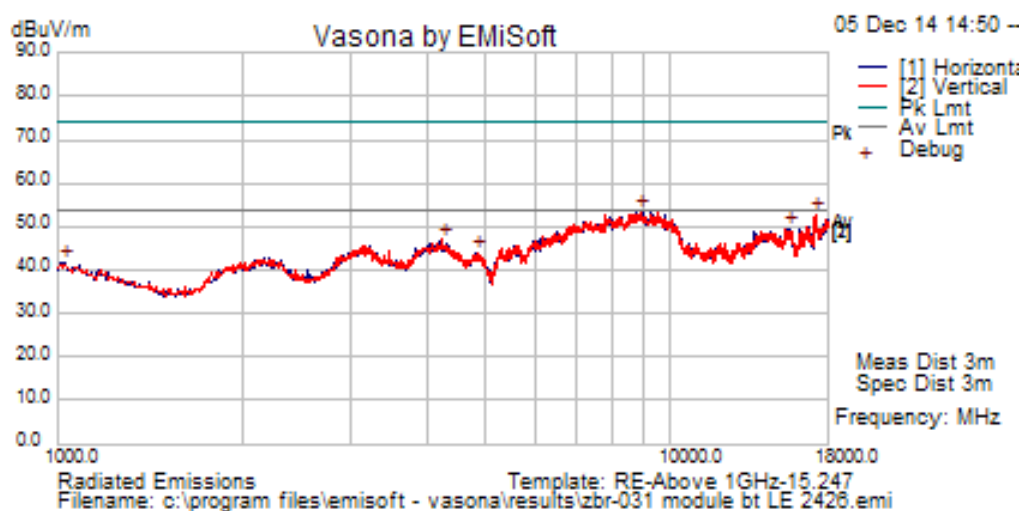

### High Channel @ 2480MHz @ 3 Meter

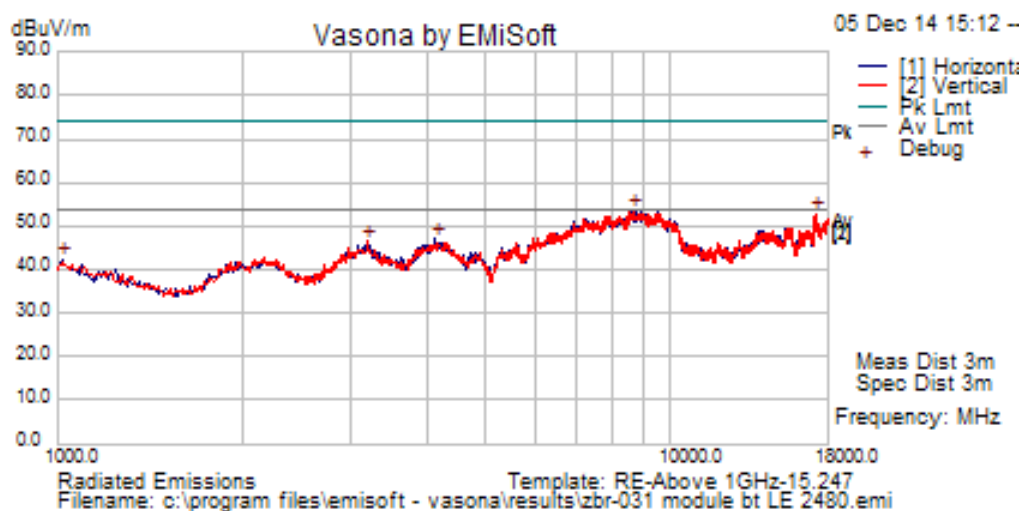

## Annex A. TEST INSTRUMENT

| Instrument                         | Model       | Serial #    | Cal Date   | Cal Cycle | Cal Due    | In use                              |
|------------------------------------|-------------|-------------|------------|-----------|------------|-------------------------------------|
| <b>Conducted Emissions</b>         |             |             |            |           |            |                                     |
| R & S Receiver                     | ESIB 40     | 100179      | 04/20/2014 | 1 Year    | 04/20/2015 | <input checked="" type="checkbox"/> |
| LISN                               | Schwarzbeck | NNLK 8129   | 08/11/2014 | 1 Year    | 08/11/2015 | <input checked="" type="checkbox"/> |
| CHASE LISN                         | MN2050B     | 1018        | 07/31/2014 | 1 Year    | 07/31/2015 | <input checked="" type="checkbox"/> |
| Sekonic Hygro Hermograph           | ST-50       | HE01-000092 | 05/25/2014 | 1 Year    | 05/25/2015 | <input checked="" type="checkbox"/> |
| <b>Radiated Emissions</b>          |             |             |            |           |            |                                     |
| R & S Receiver                     | ESL6        | 100178      | 03/01/2014 | 1 Year    | 03/01/2015 | <input checked="" type="checkbox"/> |
| R & S Receiver                     | ESIB 40     | 100179      | 04/20/2014 | 1 Year    | 04/20/2015 | <input checked="" type="checkbox"/> |
| ETS-Lingren Loop Antenna           | 6512        | 00049120    | 05/13/2014 | 1 Year    | 05/13/2015 | <input type="checkbox"/>            |
| Bi-Log antenna (30MHz~2GHz)        | JB1         | A030702     | 07/03/2014 | 1 Year    | 07/03/2015 | <input checked="" type="checkbox"/> |
| Horn Antenna (1-26.5GHz)           | 3115        | 10SL0059    | 04/26/2014 | 1 Year    | 04/26/2015 | <input checked="" type="checkbox"/> |
| Horn Antenna (18-40 GHz)           | AH-840      | 101013      | 04/23/2014 | 1 Year    | 04/23/2015 | <input checked="" type="checkbox"/> |
| Pre-Amplifier (1-26.5GHz)          | 8449B       | 3008A00715  | 05/30/2014 | 1 Year    | 05/30/2015 | <input checked="" type="checkbox"/> |
| Microwave Preamplifier (18-40 GHz) | PA-840      | 181251      | 05/30/2014 | 1 Year    | 05/30/2015 | <input checked="" type="checkbox"/> |
| 3 Meters SAC                       | 3M          | N/A         | 10/13/2014 | 1 Year    | 10/13/2015 | <input checked="" type="checkbox"/> |
| 10 Meters SAC                      | 10M         | N/A         | 06/05/2014 | 1 Year    | 06/05/2015 | <input checked="" type="checkbox"/> |
| Sekonic Hygro Hermograph           | ST-50       | HE01-000092 | 05/25/2014 | 1 Year    | 05/25/2015 | <input checked="" type="checkbox"/> |
| <b>RF Conducted Measurement</b>    |             |             |            |           |            |                                     |
| Spectrum Analyzer                  | N9010A      | MY50210206  | 05/30/2014 | 1 Year    | 05/30/2015 | <input checked="" type="checkbox"/> |
| Spectrum Analyzer                  | E4407B      | US88441016  | 05/31/2014 | 1 Year    | 05/31/2015 | <input type="checkbox"/>            |
| R & S Receiver                     | ESIB 40     | 100179      | 04/20/2014 | 1 Year    | 04/20/2015 | <input checked="" type="checkbox"/> |

## Annex B. SIEMIC Accreditation

| Accreditations                          | Document                                                                                                                                                                | Scope / Remark                                                                                                                                                            |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ISO 17025 (A2LA)                        |                                                                                        | Please see the documents for the detailed scope                                                                                                                           |
| ISO Guide 65 (A2LA)                     |                                                                                        | Please see the documents for the detailed scope                                                                                                                           |
| TCB Designation                         |                                                                                                                                                                         | <a href="#">A1</a> , <a href="#">A2</a> , <a href="#">A3</a> , <a href="#">A4</a> , <a href="#">B1</a> , <a href="#">B2</a> , <a href="#">B3</a> , <a href="#">B4</a> , C |
| FCC DoC Accreditation                   |                                                                                        | FCC Declaration of Conformity Accreditation                                                                                                                               |
| FCC Site Registration                   |                                                                                        | 3 meter site                                                                                                                                                              |
| FCC Site Registration                   |                                                                                        | 10 meter site                                                                                                                                                             |
| IC Site Registration                    |                                                                                        | 3 meter site                                                                                                                                                              |
| IC Site Registration                    |                                                                                        | 10 meter site                                                                                                                                                             |
| EU NB                                   |                                                                                        | <b>Radio &amp; Telecommunications Terminal Equipment:</b><br>EN45001 – EN ISO/IEC 17025                                                                                   |
|                                         |                                                                                      | <b>Electromagnetic Compatibility:</b><br>EN45001 – EN ISO/IEC 17025                                                                                                       |
| Singapore iDA<br>CB(Certification Body) |   | <a href="#">Phase I</a> , <a href="#">Phase II</a>                                                                                                                        |
| Vietnam MIC<br>CAB Accreditation        |                                                                                      | Please see the document for the detailed scope                                                                                                                            |
| HongKong OFCA                           |                                                                                      | <b>(Phase II)</b> OFCA Foreign Certification Body for Radio and Telecom                                                                                                   |
|                                         |                                                                                      | <b>(Phase I)</b> Conformity Assessment Body for Radio and Telecom                                                                                                         |
| Industry Canada CAB                     |                                                                                      | <b>Radio:</b> Scope A – All Radio Standard Specification in Category I                                                                                                    |
|                                         |                                                                                      | <b>Telecom:</b> CS-03 Part I, II, V, VI, VII, VIII                                                                                                                        |

|                                                    |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Japan Recognized Certification<br>Body Designation |    | <b>Radio</b> : A1. Terminal equipment for purpose of calling<br><b>Telecom</b> : B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Korea CAB Accreditation                            |    | <b>EMI</b> : KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI<br>KN22: Test Method for EMI<br><b>EMS</b> : KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS<br>KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS<br><br><b>Radio</b> : RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68<br><br><b>Telecom</b> : President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4 |
| Taiwan FCC CAB Recognition                         |    | LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Taiwan BSMI CAB Recognition                        |   | CNS 13438                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Japan VCCI                                         |  | R-3083: Radiation 3 meter site<br>C-3421: Main Ports Conducted Interference Measurement<br>T-1597: Telecommunication Ports Conducted Interference Measurement                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Australia CAB Recognition                          |  | <b>EMC</b> : AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4<br><br><b>Radiocommunications</b> : AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771<br><br><b>Telecommunications</b> : AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06, AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1                                                                                                         |
| Australia NATA Recognition                         |  | AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |