

TEST REPORT

of

FCC SAR

☒ New Application; ☐ Class I PC; ☐ Class II PC

Product: InFocus LightCast Wireless Adapter
Brand: InFocus
Model: INA-LCKEY
Model Difference: N/A
FCC ID: I46-INA-LCKEY
Standard: FCC 47 CFR Part2(2.1093)
IEEE C95.1-1999; IEEE 1528: 2013
FCC OET 65 Supplement C(Edition 01-10)
RSS-102 issue 5: 2015
Applicant: InFocus Corporation
Address: 282 Farley Dr
Guelph ON N1L 1N6 Canada

Test Performed by:
International Standards Laboratory

<Lung-Tan LAB>

*Site Registration No.: TAF: 0997

*Address:

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.

Lung-Tan Hsiang, Tao Yuan County 325, Taiwan

*Tel : 886-3-407-1718; Fax: 886-3-407-1738

Report No.: ISL-15LR278FSAR-MA

Issue Date : 2015/11/05



Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein.

This report MUST not be used to claim product endorsement by TAF or any agency of the Government. This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory.

VERIFICATION OF COMPLIANCE

Applicant: InFocus Corporation
Product Description: N/A
Brand Name: InFocus
Model No.: INA-LCKEY
Model Difference: N/A
FCC ID: I46-INA-LCKEY
Date of Receipt: 2015/10/19
Date of Test: 2015/10/8, 2015/10/12
Standard: FCC 47 CFR Part2(2.1093)
IEEE C95.1-1999; IEEE 1528: 2013
FCC OET 65 Supplement C(Edition 01-10)
RSS-102 issue 5: 2015


We hereby certify that:

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

Test By:**Date:**

2015/11/05

*Dino Chen / Engineer***Prepared By:****Date:**

2015/11/05

*Arno Hsieh / Supervisor***Approved By:****Date:**

2015/11/05

Vincent Su / Technical Manager

Version

Version No.	Date	Description
00	2015/11/05	Initial creation of document

Table of Contents

1	STATEMENT OF COMPLIANCE.....	5
2	GENERAL INFORMATION.....	7
2.1	DESCRIPTION OF DEVICE UNDER TEST (DUT).....	7
2.2	DUT PHOTOS.....	9
2.3	APPLIED STANDARDS	9
2.4	DEVICE CATEGORY AND SAR LIMITS.....	9
2.5	TEST ENVIRONMENT.....	9
2.6	TEST CONFIGURATION.....	9
3	SPECIFIC ABSORPTION RATE (SAR)	10
3.1	INTRODUCTION	10
3.2	SAR DEFINITION	10
4	SAR MEASUREMENT SYSTEM.....	11
4.1	ALSAS-10U SYSTEM DESCRIPTION	11
4.2	E-FIELD PROBE ALS-E-020S	12
4.3	DAQ-PAQ (ANALOG TO DIGITAL ELECTRONICS) ALS-DAQ-PAQ-3 BOUNDARY DETECTION UNIT ALS-PMDPS-3.....	14
4.4	AXIS ARTICULATED ROBOT ALS-F3	16
4.5	ALSAS UNIVERSAL WORKSTATION ALS-UWS.....	16
4.6	SAM PHANTOMS ALS-P-SAM-L / ALS-P-SAM-R.....	17
4.7	UNIVERSAL DEVICE POSITIONER	19
4.8	TEST EQUIPMENT LIST	20
5	TISSUE SIMULATING LIQUIDS.....	21
6	SAR MEASUREMENT EVALUATION	23
7	DUT TESTING POSITION	26
8	SAR MEASUREMENT PROCEDURES.....	29
9	SAR TEST RESULTS.....	31
9.1	CONDUCTED POWER TABLE:.....	31
9.2	TEST RECORDS FOR BODY SAR TEST	33
9.3	RSS 102, IC NOTICE 2012-DRS0529: SAR CORRECTION FOR MEASURED CONDUCTIVITY AND RELATIVE PERMITTIVITY BASED ON IEC 62209-2 STANDARD	36
10	EXPOSURE ASSESSMENT MEASUREMENT UNCERTAINTY	40
APPENDIX A	TEST SETUP PHOTOS	41
APPENDIX B	DUT PHOTOS.....	45
APPENDIX C:	SYSTEM PERFORMANCE CHECK	45
APPENDIX D:	SAR MEASUREMENT DATA	45
APPENDIX E:	PROBE CALIBRATION CERTIFICATE.....	45
APPENDIX F:	DIPOLE CALIBRATION CERTIFICATE	45

1 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) were found during testing for EUT, which are as follows (with expanded uncertainty 21.4 % for 300 MHz to 3 GHz).

FCC Scaled Up SAR Value:

Type	FCC Equipment Class	Position	SAR 1g(W/kg)
802.11b	DTS	Body, 0.5cm distance	0.601
802.11g	DTS	Body, 0.5cm distance	0.653
802.11n 20n	DTS	Body, 0.5cm distance	0.858
802.11n 40n	DTS	Body, 0.5cm distance	0.644
802.11a Band 1	NII	Body, 0.5cm distance	0.754
802.11a Band 4	NII	Body, 0.5cm distance	0.479
802.11an 20n Band 1	NII	Body, 0.5cm distance	0.171
802.11an 20n Band 4	NII	Body, 0.5cm distance	0.199
802.11an 40n Band 1	NII	Body, 0.5cm distance	0.198
802.11an 40n Band 4	NII	Body, 0.5cm distance	0.173
802.11ac 20n Band 1	NII	Body, 0.5cm distance	0.130
802.11ac 20n Band 4	NII	Body, 0.5cm distance	0.114

ICΔSAR Value

Type	FCC Equipment Class	Position	Δ SAR 1g(W/kg)
802.11b	DTS	Body, 0.5cm distance	0.605
802.11g	DTS	Body, 0.5cm distance	0.657
802.11n 20n	DTS	Body, 0.5cm distance	0.863
802.11n 40n	DTS	Body, 0.5cm distance	0.648
802.11a Band 1	NII	Body, 0.5cm distance	0.741
802.11a Band 4	NII	Body, 0.5cm distance	0.471
802.11an 20n Band 1	NII	Body, 0.5cm distance	0.168
802.11an 20n Band 4	NII	Body, 0.5cm distance	0.196
802.11an 40n Band 1	NII	Body, 0.5cm distance	0.195
802.11an 40n Band 4	NII	Body, 0.5cm distance	0.171
802.11ac 20n Band 1	NII	Body, 0.5cm distance	0.127
802.11ac 20n Band 4	NII	Body, 0.5cm distance	0.112

The device is in compliance with Specific Absorption Rate (SAR) for general population /uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093), RSS-102 Issue5:2015 and ANSI/IEEE C95.1-1999, and had been tested in accordance with the measurement methods and procedures specified in IEEE1528: 2013 and FCC OET Bulletin 65 Supplement C (Edition 01-01).

2 General Information

2.1 Description of Device Under Test (DUT)

General:

Product Name:	InFocus LightCast Wireless Adapter
Brand:	InFocus
Model:	INA-LCKEY
Model different:	NA
Power Supply	5Vdc to USB Port
Test SW Version	Realtek Realtek 11ac 8812A USB WLAN MP Diagnostic Program 0.0059.20130716

WLAN: 2Tx / 2Rx

Wi-Fi	Frequency Range (MHz)	Channels	Rated Power at each Chain(Average)	Modulation Technology
802.11b	2412 – 2462(DTS)	11	12.0 +/- 1.5dBm	DSSS
802.11g	2412 – 2462(DTS)	11	12.5 +/- 1dBm	DSSS, OFDM
802.11n	HT20 2412 – 2462(DTS)	11	13.0 +/- 1dBm	OFDM
	HT40 2422 – 2452(DTS)	9	12.5 +/- 1dBm	
	HT20 5180 – 5240(NII)	4	11.0 +/-2dBm	
	HT20 5745 – 5850(NII)	5	11.0 +/- 2dBm	
	HT40 5190 – 5230(NII)	3	11.0 +/- 2dBm	
	HT40 5755 – 5795(NII)	4	11.0 +/- 2dBm	
802.11ac	HT20 5180 – 5240(NII)	4	11.0 +/- 2dBm	
	HT20 5745 – 5850(NII)	5	10.5 +/-2dBm	
	HT40 5190 – 5230(NII)	3	10.5 +/-2dBm	
	HT40 5755 – 5795(NII)	4	10.5 +/-2dBm	
	HT80 5210(NII)	1	9.5 +/- 1dBm	
	HT80 5775(NII)	1	9.5 +/- 1dBm	
802.11a	5180 – 5240(NII)	4	11.5 +/-2dBm	OFDM
	5745 – 5850(NII)	5	11.5 +/-2dBm	
Modulation type		CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM		
Antenna Designation:		PCB Antenna 3.5dBi for 2.4GHz 5.9dBi for 5GHz		

This report applies for 802.11 a/b/g/n/ac modes.

Remark: The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

2.2 DUT Photos

Please refer to Appendix B. see RF report.

2.3 Applied Standards

The Specific Absorption Rate (SAR) testing specification, method and procedure for this Notebook Computer is in accordance with the following standards:

FCC 47 CFR Part 2 (2.1093)

IEEE C95.1-1999

IEEE 1528: 2013

FCC OET Bulletin 65 Supplement C (Edition 01-01)

RSS-102 Issue 5: 2015

FCC KDB 447498 D01 General RF Exposure Guidance v05r02: Feb/07/2014

FCC KDB 447498 D02 SAR Procedures for Dongle Xmtr v02: 11/13/2009

FCC KDB 248227 D01 SAR GUIDANCE FOR IEEE 802.11(WIFI) : March/16/2015

FCC KDB 558074 D01 DTS Meas Guidance v03r02: June 5, 2014

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03: February 7, 2014

2.4 Device Category and SAR Limits

This device belongs to **portable** device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for **General Population/Uncontrolled** exposure should be applied for this device, it is **1.6 W/kg** as averaged over any 1 gram of tissue.

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit
Spatial Peak SAR (1g cube tissue for brain or body)	1.60 W/kg
Spatial Average SAR (whole body)	0.08 W/kg
Spatial Peak SAR (10g for hands, feet, ankles and wrist)	4.00 W/kg

2.5 Test Environment

Item	Required	Actual
Temperature (°C)	18-25°C	20 to 24 °C
Humidity (%RH)	30-70 %	< 60 %

2.6 Test Configuration

The device was controlled by using a test software to transmit TX power level at max continuously. Modulation type and Channel number are selected by software also.

3 Specific Absorption Rate (SAR)

3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4 SAR Measurement System

4.1 ALSAS-10U System Description

APREL Laboratories ALSAS-10U is fully optimized for the dosimetric evaluation of a broad range of wireless transceivers and antennas. Developed in line with the latest methodologies it is fully compliant with the technical and scientific requirements of IEEE 1528: 2013, IEC 62209 Part 1 & 2 (draft), CENELEC, ARIB, ACA, and the Federal Communications Commission. The system comprises of a six axes articulated robot which utilizes a dedicated controller.

ALSAS-10U uses the latest methodologies and FDTD modeling to provide a platform which is repeatable with minimum uncertainty.

Applications

ALSAS-10U is designed to cover the frequency range from 30MHz to 6GHz as per the IEC 62209 Part II (draft) standard. There is no limiting factor to the operating RF carrier frequency range for the ALSAS-10U system other than the phantoms chosen for testing. The ALSAS-10U has been designed to be modular and phantoms are integrated onto the Universal Workstation™ so as to allow for complete flexibility of the measurement process. This unique design allows for a fully flexible system which can be built around the exact needs of the user.



Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm² step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the ALSAS-10U software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 5x5x8 (8mmx8mmx5mm) providing a volume of 32mm in the X & Y axis, and 35mm in the Z axis.

ALSAS-10U Interpolation and Extrapolation Uncertainty

The overall uncertainty for the methodology and algorithms the used during the SAR calculation was evaluated using the data from IEEE 1528: 2013 based on the example f3 algorithm:


$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \cdot \left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a + 2z)^2} \right)$$

Refer to raw data for measurement uncertainty

4.2 E-Field Probe ALS-E-020S

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change. A number of methods is used for calibrating probes, and these are outlined in the table below:

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

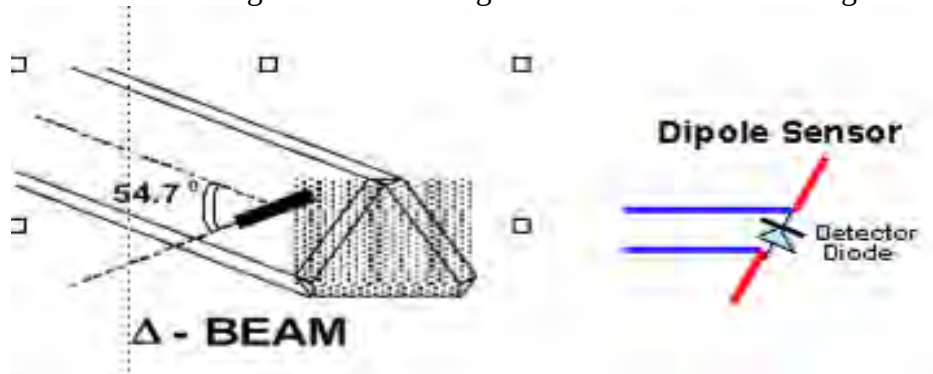

SAR is assessed with a calibrated probe which moves at a default height of 5mm from the center of the diode, which is mounted to the sensor, to the phantom surface (in the Z Axis). The 5mm offset height has been selected so as to minimize any resultant boundary effect due to the probe being in close proximity to the phantom surface.

The following algorithm is an example of the function used by the system for linearization of the output from the probe when measuring complex modulation schemes.

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

4.2.1 E-Field Probe Specification

Model: ALS-E-020S

Compliant Standards	IEEE 1528: 2013, IEC 62209 Part 1 & 2 (draft)
Frequency Range	30 MHz ~ 6 GHz
Sensitivity	Better than 0.8 μ V/(V/m) ²
Dynamic Range SAR	0.001 W/kg to 100 W/kg
Isotropic Response Axial	Typically $\pm$ 0.1dB
Hemispherical isotropy	$\pm$ 0.3 dB or better
Linearity	$\pm$ 0.2 dB or better
Probe Tip Radius	User selectable all <5 mm
Sensor Offset	1.56 ($\pm$ 0.02 mm)
Probe Length	290 mm
Video Bandwidth	@ 500 Hz: 1 dB @ 1K Hz: 3 dB
Boundary Effect	Less than 2% for distances greater than 2.4 mm
Material	Ertalyte™
Connector	6 Pin Bayonet

E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm$ 10%. The spherical isotropy shall be evaluated and within $\pm$ 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

Boundary Detection Unit and Probe Mounting Device


ALSAS-10U incorporates a boundary detection unit with a sensitivity of 0.05mm for detecting all types of surfaces. The robust design allows for detection during probe tilt (probe normalize) exercises, and utilizes a second stage emergency stop. The signal electronics are fed directly into the robot controller for high accuracy surface detection in lateral and axial detection modes (X, Y, & Z).

The probe is mounted directly onto the Boundary Detection unit for accurate tooling and displacement calculations controlled by the robot kinematics. The probe is connect to an isolated probe interconnect where the output stage of the probe is fed directly into the amplifier stage of the Daq-Paq.

4.3 DAQ-PAQ (Analog to Digital Electronics) ALS-DAQ-PAQ-3 Boundary Detection Unit ALS-PMDPS-3

ALSAS-10U incorporates a fully calibrated Daq-Paq (analog to digital conversion system) which has a 4 channel input stage, sent via a 2 stage auto-set amplifier module. The input signal is amplified accordingly so as to offer a dynamic range from 4 μ V to 330 mV. Integration of the fields measured is carried out at board level utilizing a Co-Processor which then sends the measured fields down into the main computational module in digitized form via an RS232 communications port. Probe linearity and duty cycle compensation is carried out within the main Daq-Paq module.

PMDPS is used to hold a probe and to detect complex boundary locations (curved and flat surfaces) during a SAR or HAC assessment process. It utilizes relative movements of internal components to trigger integrated micro-sensor mechanisms in order to detect boundary(s) and consequently position the probe at the specified distance relative to a boundary in order to achieve accurate and repeatable measurements.

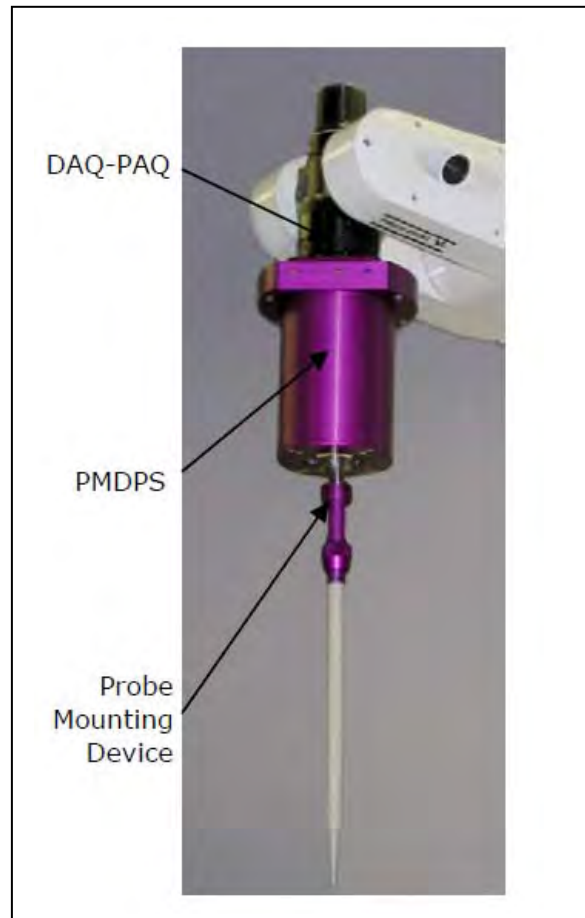

Amplifier Range	4 μ V to 330 mV
ADC	16 Bit optically isolated
Built-in E-Stop Feature	Emergency Stop feature to prevent damage of equipment and for user safety purposes
Field Integration	Local Co-Processor utilizing proprietary integration algorithms
SAR Dynamic Range	0.001 W/kg -100 W/kg.
Ambient Noise	Below 0.001 W/kg measured with probe in tissue
LED Indication	Boundary detection and DAQ-PAQ State
Number of Input Channels	4 in total 3 dedicated and 1 spare for future upgrades (when and if needed)
Communication	Optically isolated packet data via RS232
Robot Arm Integration	DAQ-PAQ and Boundary Detection Unit are mounted directly onto joint 6 of the F3 arm utilizing joint 6 tool (ISO Standard M8 Mounting Plate) to allow easy integration and removal (no angular interface)
Supply	DC supply powered by an isolated external supply unit (no battery required)
LED Indicators	Probe status (amplifier on) and boundary detection

PMDPS Specification details

Accuracy of Positioning	Better than 10 μ m at 6GHz
SAR Uncertainty	Better than 0.01 W/kg SAR at 6Gz
Detection Mechanism	2 x 360° Stage Axial and Lateral Detection at 6GHz
Emergency Stop	4 Stage 360° Axial and Lateral Detection at 6GHz
Probe Mounting	6 Pin Bayonet for Fast Probe Change
Calibration	Every PMDPS is Calibrated to 0.01 W/kg SAR at 6GHz
Reliability Expectations	Better Than 10,000,000 Cycles

4.4 Axis Articulated Robot ALS-F3



ALSAS-10U utilizes a six axis articulated robot, which is controlled using a Pentium based real-time movement controller. The movement kinematics engine utilizes proprietary (Thermo CRS) interpolation and extrapolation algorithms, which allow full freedom of movement for each of the six joints within the working envelope. Utilization of joint 6 allows for full probe rotation with a tolerance better than 0.05mm around the central axis.

Robot/Controller Manufacturer	Thermo CRS
Number of Axis	Six independently controlled axis
Positioning Resolution	0.05mm
Controller Type	Single phase Pentium based C500C
Robot Reach	710mm
Repeatability	0.05mm or better
Communication	RS232 and LAN compatible

4.5 ALSAS Universal Workstation ALS-UWS

ALSAS Universal workstation allows for repeatability and fast adaptability. It allows users to do calibration, testing and measurements using different types of phantoms with one set up, which significantly speeds up the measurement process.



Workstation.
Top view (rendering)




Workstation
without robot (rendering)

4.6 SAM Phantoms ALS-P-SAM-L / ALS-P-SAM-R

The ALSAS-10U allows the integration of multiple phantom types. SAM Phantoms fully compliant with IEEE 1528: 2013, Universal Phantom, and Universal Flat.

APREL SAM Phantoms

The SAM phantoms developed using the IEEE SAM CAD file. They are fully compliant with the requirements for both IEEE 1528: 2013 and FCC Supplement C. Both the left and right SAM phantoms are interchangeable, transparent and include the IEEE 1528: 2013 grid with visible NF and MB lines.

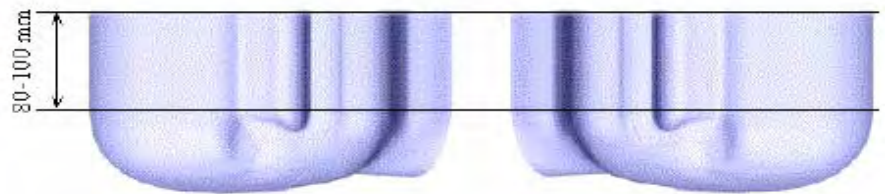

Compliant Standards	IEEE-1528: 2013, IEC 62209 Part 1 & 2 (draft)
SAM	In accordance with the IEEE 1528: 2013 standard
Material	Composite urethane which allows for the device to be viewed through the phantom, resistant to DGBE
Phantom Shell Shape Tolerance	Fully calibrated to be better than ± 0.2 mm
Frame Material	Corian®
Tissue Simulation Volume	7 liter with 15.0 ± 0.5 cm tissue
Thickness	2 mm ± 0.2 mm 6 mm ± 0.2 mm at NF/MB intersection
Loss Tangent	<0.05
Relative Permittivity	<5
Resistant to Solvents	Resistant to all solvents used for tissue manufacturing detailed in IEEE 1528: 2013
Load Deflection	<1mm with sugar water compositions
Manufacturing Process	Injection Molded
Phantom Weight	Less than 10kg when filled with 15cm of simulation tissue

Universal Phantom ALS-P-UP-1

The Universal Phantom is used on the ALSAS-10U as a system validation phantom. The Universal Phantom has been fully validated both experimentally from 800MHz to 6GHz and numerically using XFDTD numerical software. The shell thickness is 2mm overall, with a 4mm spacer located at the NF/MB intersection providing an overall thickness of 6mm in line with the requirements of IEEE-1528: 2013.

The design allows for fast and accurate measurements, of handsets, by allowing the conservative SAR to be evaluated at on frequency for both left and right head experiments in one measurement.





Compliant Standards	IEEE-1528: 2013, IEC 62209 Part 1 & 2 (draft), CENELEC, and others
Manufacturing Process	Injection molded
Material	Vivac
Phantom Shell Shape Tolerance	Less than ± 0.2 mm
Frame Material	Corian®
Tissue Simulation Volume	8 liter with 15.0 ± 0.5 cm tissue
Thickness	2mm ± 0.2 mm 6mm at NF/MB intersection
Loss Tangent	<0.05
Relative Permittivity	<5
Resistant to Solvents	Resistant to all solvents detailed in IEEE 1528: 2013
Load Deflection	<1mm with heaviest tissue (sugar water compositions)
Dimensions	Length 220mm x breadth 170mm
Phantom Weight	Less than 10kg when filled with 15cm of simulation tissue

4.7 Universal Device Positioner

ALS-H-E-SET-2

The universal device positioner allows complete freedom of movement of the EUT. Developed to hold a EUT in a free-space scenario any additional loading attributable to the material used in the construction of the positioner has been eliminated. Repeatability has been enhanced through the linear scales which form the design used to indicate positioning for any given test scenario in all major axes. A 15° tilt indicator is included for the of aid cheek to tilt movements for head SAR analysis. Overall uncertainty for measurements has been reduced due to the design of the Universal device positioner, which allows positioning of a device in as near to a free-space scenario as possible, and by providing the means for complete repeatability.

Compliant Standards	IEEE 1528: 2013, IEC 62209 Part 1 & 2 (draft)
Dielectric constant	Less than 5.0
Loss Tangent	Less than 0.05
Number of Axis	6 axis freedom of movement (8 when utilized with ALSAS-10U Workstation)
Translation Along MB Line	± 76.2 mm
Translation Along NF Line	± 38.1 mm
Translation Along Z Axis	± 25.4 mm (expandable up to 500 mm)
Rotation Around MB Line (yaw)	±10°
Rotation Around NF (pitch)	± 30°
Line Rotation (roll)	360° full circle
Maximum Grip Range	0 mm to 150 mm
Material	Resistant to DGBE and all other tissue stimulant materials as listed in IEEE 1528: 2013 Annex C.1.
Tilt Movement	Full movement with built-in 15° gauge



4.8 Test Equipment List

Equipment Type	MFR	Model No.	Serial No.	Last Cal.	Cal. Due Date
Vector Network Analyzer	Agilent	E5071B	MY42402726	12/04/2014	12/03/2015
Dielectric Probe Kit	Aglient	85070E	MY44300124	N/A	N/A
Vector Signal Generator	R&S	SMU200A	102330	03/11/2015	03/10/2016
Power Meter	Anritsu	ML2495A	1116010	05/07/2015	05/06/2016
Power Sensor	Anritsu	MA2411B	34NKF50	05/07/2015	05/06/2016
Data Acquisition Package	Apriel	ALS-DAQ-PAQ-3	110-00220	NA	NA
Apriel Laboratories Probe	Apriel	ALS-E020	266	01/12/2015	01/11/2016
Apriel Reference Dipole 2450MHz	Apriel	ALS-D-2450-S-2	2450-220-00753	01/12/2015	01/11/2016
Apriel Reference Dipole 5250MHz	Apriel	ALS-D-5200-S-2	230-00802	01/12/2015	01/11/2016
Apriel Reference Dipole 5800MHz	Apriel	ALS-D-5800-S-2	240-00852	01/12/2015	01/11/2016
Boundary Detection Sensor System	Apriel	ALS-PMDPS-3	120-00266	N/A	N/A
Universal Work Station	Apriel	ALS-UWS	100-00153	N/A	N/A
Device Holder 2.0	Apriel	ALS-H-E-SET-2	170-00503	N/A	N/A
Left Ear SAM Phantom	Apriel	ALS-P-SAM-L	130-00305	N/A	N/A
Right Ear SAM Phantom	Apriel	ALS-P-SAM-R	140-00359	N/A	N/A
Universal Phantom	Apriel	ALS-P-UP-1	150-00405	N/A	N/A
Apriel Dipole Spacer	Apriel	ALS-DS-U	250-00903	N/A	N/A
SAR Software	Apriel	ALSAS-10U Ver.2.5.0.261	B0D5F-112FE	N/A	N/A
CRS C500C Controller	Thermo	ALS-C500	RCF0440278	N/A	N/A
CRF F3 Robot	Thermo	ALS-F3	RAF0440252	N/A	N/A
Power Amplifier	Mini-Circuit	ZVE-8G	D030305	N/A	N/A

Note: All equipment upon which need to be calibrated are with calibration period of 1 year.

5 Tissue Simulating Liquids

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in IEEE1528: 2013 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in IEEE1528: 2013 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in IEEE1528: 2013.

Target Frequency	Parameters(Body) IEEE1528: 2013 OTE 65		Parameters(Head) 62209-1/-2 IEEE1528: 2013 OET65	
(MHz)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
835	55.2	0.97	41.5	0.90
900	55.0	1.05	41.5	0.97
1800 – 2000	53.3	1.52	40.0	1.4
2450	52.7	1.95	39.2	1.8
5800	48.2	6.00	35.3	5.27

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using Agilent Dielectric Probe Kit 85070E and Agilent E5071B Vector Network Analyzer

Body Tissue Simulant Measurement				
Frequency [MHz]	Description	Dielectric Parameters		Tissue Temp. [°C]
		ϵ_r	σ [s/m]	
2450MHz	Reference result ± 5% window	52.7 50.065 to 55.335	1.95 1.8525 to 2.0475	N/A
	Oct 08, 2015	53.3207	1.9348	22.0
2412MHz	Oct 08, 2015	53.2271	1.9317	22.0
2437MHz	Oct 08, 2015	53.2158	1.9326	22.0
2462MHz	Oct 08, 2015	53.4412	1.9393	22.0


Body Tissue Simulant Measurement				
Frequency [MHz]	Description	Dielectric Parameters		Tissue Temp. [°C]
		ϵ_r	σ [s/m]	
	Reference result ± 10% window	48.2 43.38 to 53.02	6.0 5.400 to 6.600	N/A
	Oct 12, 2015	44.215	5.525	22.0
5180	Oct 12, 2015	44.283	5.537	22.0
5240	Oct 12, 2015	44.166	6.216	22.0
5745	Oct 12, 2015	44.178	6.235	22.0
5785	Oct 12, 2015	44.169	6.258	22.0
5825	Oct 12, 2015			

6 SAR Measurement Evaluation

Each system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the APREL SAR software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

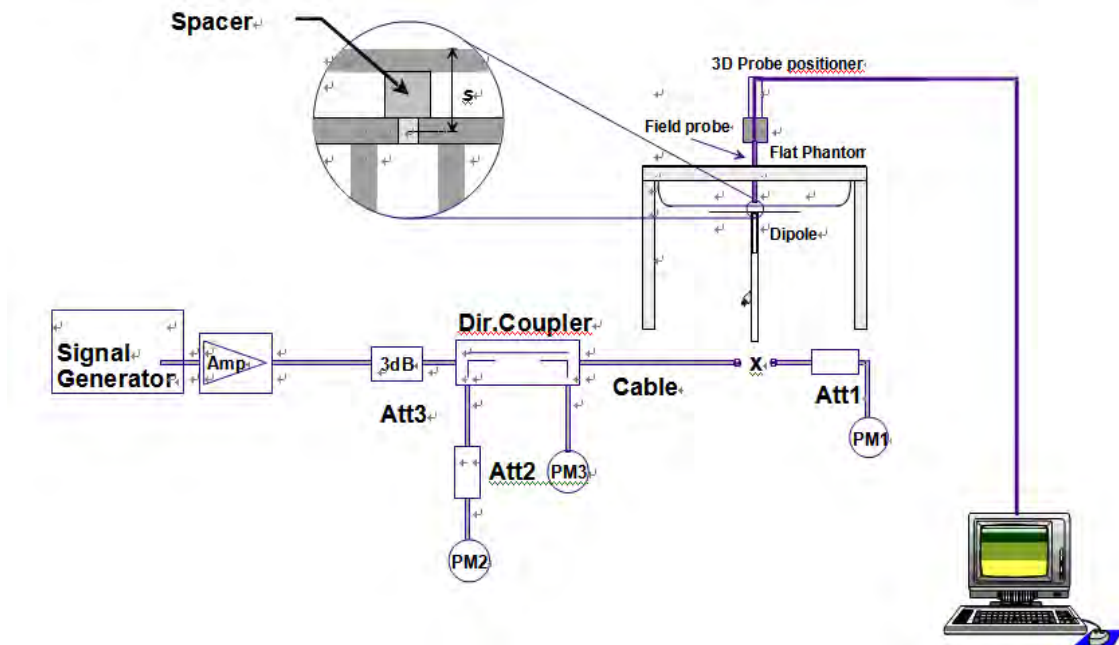

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole

Validation Dipoles

The dipoles used is based on the IEEE-1528: 2013 standard, and is complied with mechanical and electrical specifications in line with the requirements of both IEEE and FCC Supplement C. the table below provides details for the mechanical and electrical specifications for the dipoles.

*	Frequency	L (mm)	h (mm)	d (mm)
	835MHz	161.0	89.8	3.6
	900MHz	149.0	83.3	3.6
	1800MHz	72.0	41.7	3.6
	1900MHz	68.0	39.5	3.6
v	2450MHz	51.5	30.4	3.6
v	5200MHz	23.6	14.0	3.6
	5600MHz	21.61	18.22	3.6
v	5800MHz	21.6	12.6	3.6

*Note: “V” indicates Frequency used of EUT

The output power on dipole port must be calibrated to 30 dBm (1W) before dipole is connected.

Validation Result



Comparing to the Yearly Calibration SAR value provided by A P R E L , the validation data should be within its specification of 5 %. Table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix E of this report.

Frequency [MHz]	Description	SAR [w/kg] 1g	SAR [w/kg] 10g	Tissue Temp. [°C]
2450 MHz	Reference result ± 5% window	53.46 50.787 to 56.133	24.89 23.645 to 26.134	N/A
	08-Oct-2015	53.119	25.041	22.0

Frequency [MHz]	Description	SAR [w/kg] 1g	SAR [w/kg] 10g	Tissue Temp. [°C]
5250 MHz	Reference result ± 5% window	63.18 60.021 to 66.339	21.25 20.187 to 22.312	N/A
	12-Oct-2015	65.013	22.002	22.0


Frequency [MHz]	Description	SAR [w/kg] 1g	SAR [w/kg] 10g	Tissue Temp. [°C]
5800 MHz	Reference result ± 5% window	59.95 56.952 to 62.947	18.61 17.679 to 19.54	N/A
	12-Oct-2015	58.411	19.105	22.0

Note: All SAR values are normalized 1W.

7 DUT Testing Position

Test Positions of Device Relative to Head

This specifies exactly two test positions for the handset against the head phantom, the “cheek” position and the “tilted” position. The handset should be tested in both positions on the left and right sides of the SAM phantom. If the handset construction is such that it cannot be positioned using the handset positioning procedures described in 4.2.2.1 and 4.2.2.2 to represent normal use conditions (e.g., asymmetric handset), alternative alignment procedures should be considered with details provided in the test report.

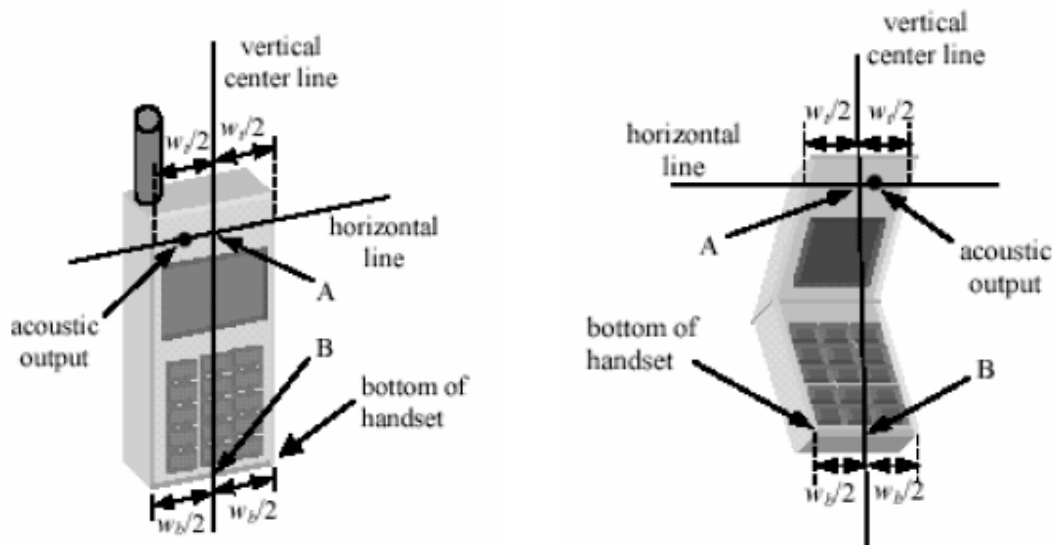


Definition of the “Cheek” Position

The “cheek” position is defined as follows:

- Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece, open the cover. (If the handset can also be used with the cover closed both configurations must be tested.)
- Define two imaginary lines on the handset: the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A on Figures 4.1a and 4.1b), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 4.1a). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 4.1b), especially for clamshell handsets, handsets with flip pieces, and other irregularly-shaped handsets.
- Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 4.2), such that the plane defined by the vertical center line and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.


- d. Translate the handset towards the phantom along the line passing through RE and LE until the handset touches the pinna.
- e. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to MB-NF including the line MB (called the reference plane).
- f. Rotate the handset around the vertical centerline until the handset (horizontal line) is symmetrical with respect to the line NF.
- g. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE and maintaining the handset contact with the pinna, rotate the handset about the line NF until any point on the handset is in contact with a phantom point below the pinna (cheek). See Figure 4.2 the physical angles of rotation should be noted.

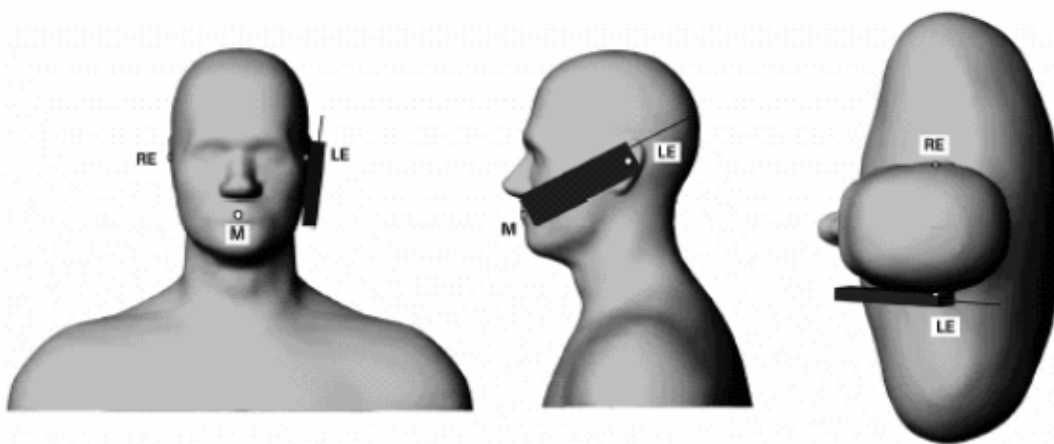

Definition of the “Tilted” Position

The “tilted” position is defined as follows:

- a. Repeat steps (a) – (g) of 4.2.1.1 to place the device in the “cheek position.”
- b. While maintaining the orientation of the handset move the handset away from the pinna along the line passing through RE and LE in order to enable a rotation of the handset by 15 degrees.
- c. Rotate the handset around the horizontal line by 15 degrees.
- d. While maintaining the orientation of the handset, move the handset towards the phantom on a line passing through RE and LE until any part of the handset touches the ear. The tilted position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna (e.g., the antenna with the back of the phantom head), the angle of the handset should be reduced. In this case, the tilted position is obtained if any part of the handset is in contact with the pinna as well as a second part of the handset is contact with the phantom (e.g., the antenna with the back of the head).

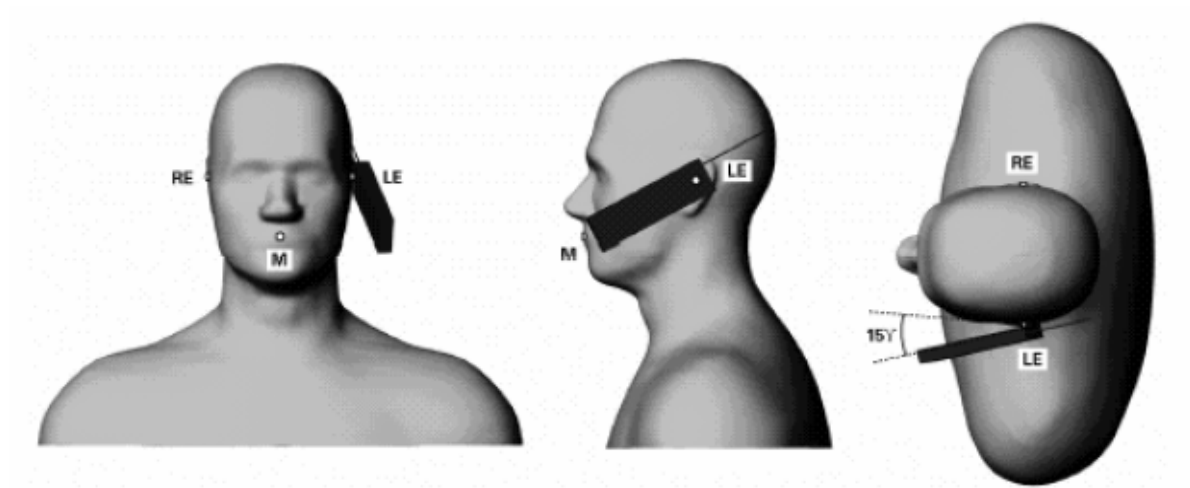

Test Positions for body-worn

Body-worn operating configurations should be tested without the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. A separation distance of **0.5 cm** between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distance may be used, but not exceed 2.5 cm.

The DUT has only body mode test positions and test mode refer to section 8.2

8 SAR Measurement Procedures

The measurement procedures are as follows:

- (a) through software control to continuous transmit
- (b) Set software to maximum output power and data rate
- (c) Measure output power through RF cable and power meter
- (d) Place the DUT in the positions described in the last section
- (e) Set scan area, grid size and other setting on the APREL software
- (f) Taking data for the maximum power on each testing position
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for the other channels in worst SAR testing position

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The APREL SAR software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

SAR Averaged Methods

In APREL, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

9 SAR Test Results

9.1 Conducted power table:

WIFI power measurement

INA-LCKEY		Power Set	Conducted Power (dBm)			Power Set	Conducted Power (dBm)
	ant A				ant B		
2.4G							
802.11b	CH1	34	12.34		CH1	35	12.77
	CH6	34	12.44		CH6	35	13.12
	CH11	34	12.29		CH11	35	13.2
802.11g	CH1	47	13.16		CH1	47	13.27
	CH6	47	13.36		CH6	47	13.34
	CH11	47	13.19		CH11	47	13.34
802.11n 20M	CH1	48	13.42		CH1	48	13.64
	CH6	48	13.67		CH6	48	13.66
	CH11	48	13.54		CH11	48	13.71
802.11n 40M	CH1	49	13.22		CH1	49	13.27
	CH4	49	13.31		CH4	49	13.25
	CH7	49	13.3		CH7	49	13.36

INA-LCKEY		Power Set	Conducted Power (dBm)			Power Set	Conducted Power (dBm)
	ant A				ant B		
5G							
802.11a	CH36	48	11.58		CH36	50	11.68
	CH40	48	11.91		CH40	50	11.55
	CH48	48	13.23		CH48	50	11.92
	CH149	48	11.82		CH149	52	11.6
	CH157	48	11.91		CH157	52	11.54
	CH165	48	12.24		CH165	52	11.9

802.11n 20M	CH36	49	12.09		CH36	51	11.66
	CH40	45	11.46		CH40	48	11.63
	CH48	45	11.6		CH48	48	11.81
	CH149	49	12.2		CH149	53	11.22
	CH157	49	12.24		CH157	53	11.78
	CH165	49	12.7		CH165	53	12.22

802.11n 40M	CH38	49	11.12		CH38	52	11.03
	CH46	49	12.12		CH46	52	11.27
	CH151	49	12.97		CH151	52	11.05
	CH159	49	12.56		CH159	52	12

802.11ac 20M	CH36	49	12.11		CH36	51	11.61
	CH40	49	12.3		CH40	51	11.58
	CH48	49	12.44		CH48	51	11.8
	CH149	49	12.19		CH149	53	11.07
	CH157	49	12.42		CH157	53	11.8
	CH165	49	12.72		CH165	53	12.16

802.11ac 40M	CH38	49	11.12		CH38	52	10.51
	CH46	49	12.04		CH46	52	11.33
	CH151	49	10.81		CH151	54	10.62
	CH159	49	12.17		CH159	54	11.91

802.11ac 80M	CH42	45	9.53		CH42	48	10.18
	CH155	45	9.89		CH155	48	10.29

9.2 Test Records for Body SAR Test

Ambient Temperature (°C) : 22.0	Relative Humidity (%):60
Liquid Temperature (°C) : 22	Depth of Liquid (cm):>15

Data No:	Test Mode	Test Position	Separation Distance (cm)	Ch.	Measured Avg Power(dBm)	Tune-up maximum limit(dBm)	Scaling factor	Measured SAR 1g (W/kg)	Scaled SAR 1g (W/kg)
1	802.11b	direct Inserted to Notebook	0.5	11	13.20	13.50	1.07	0.493	0.528
2	802.11b	with USB Cable connect to Notebook Horizontal-Down	0.5	11	13.20	13.50	1.07	0.561	0.601
3	802.11b	with USB Cable connect to Notebook Horizontal-Up	0.5	11	13.20	13.50	1.07	0.529	0.567
4	802.11b	with USB Cable connect to Notebook Vertical-Front	0.5	11	13.20	13.50	1.07	0.043	0.046
5	802.11b	with USB Cable connect to Notebook Vertical-Back	0.5	11	13.20	13.50	1.07	0.330	0.354
6	802.11b	with USB Cable connect to USB Top	0.5	11	13.20	13.50	1.07	0.026	0.028
7	802.11g	with USB Cable connect to Notebook Horizontal-Down	0.5	6	13.36	13.50	1.03	0.632	0.653
8	802.11n 20	with USB Cable connect to Notebook Horizontal-Down	0.5	6	13.67	14.00	1.08	0.718	0.775

Data No:	Test Mode	Test Position	Separation Distance (cm)	Ch.	Measured Avg Power(dBm)	Tune-up maximum limit(dBm)	Scaling factor	Measured SAR 1g (W/kg)	Scaled SAR 1g (W/kg)
9	802.11n 20	with USB Cable connect to Notebook Horizontal-Down	0.5	11	13.71	14.00	1.07	0.803	0.858
10	802.11n 40	with USB Cable connect to Notebook Horizontal-Down	0.5	9	13.36	13.50	1.03	0.624	0.644
11	802.11a Band 1	direct Inserted to Notebook	0.5	48	13.23	13.50	1.06	0.110	0.117
12	802.11a Band 1	with USB Cable connect to Notebook Horizontal-Down	0.5	48	13.23	13.50	1.06	0.259	0.276
13	802.11a Band 1	with USB Cable connect to Notebook Horizontal-Up	0.5	48	13.23	13.50	1.06	0.709	0.754
14	802.11a Band 1	with USB Cable connect to Notebook Vertical-Front	0.5	48	13.23	13.50	1.06	0.682	0.726
15	802.11a Band 1	with USB Cable connect to Notebook Vertical-Back	0.5	48	13.23	13.50	1.06	0.002	0.002
16	802.11a Band 1	with USB Cable connect to USB Top	0.5	48	13.23	13.50	1.06	0.009	0.010
17	802.11a Band 4	with USB Cable connect to Notebook Horizontal-Up	0.5	165	12.24	13.50	1.34	0.358	0.479
18	802.11n 20 Band 1	with USB Cable connect	0.5	36	12.09	13.00	1.23	0.139	0.171

		to Notebook Horizontal-Up							
19	802.11n 20 Band 4	with USB Cable connect to Notebook Horizontal-Up	0.5	165	12.70	13.00	1.07	0.186	0.199
20	802.11n 40 Band 1	with USB Cable connect to Notebook Horizontal-Up	0.5	46	12.12	13.00	1.22	0.162	0.198
21	802.11n 40 Band 4	with USB Cable connect to Notebook Horizontal-Up	0.5	151	12.97	13.00	1.01	0.172	0.173
22	802.11ac 20 Band 1	with USB Cable connect to Notebook Horizontal-Up	0.5	48	12.44	13.00	1.14	0.114	0.130
23	802.11ac 20 Band 4	with USB Cable connect to Notebook Horizontal-Up	0.5	165	12.72	13.00	1.07	0.107	0.114

Remark:

1. According KDB 248227 When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.
2. According KDB 248227 When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.
3. According KDB 248227 When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg not require test for OFDM.

9.3 RSS 102, IC NOTICE 2012-DRS0529: SAR CORRECTION FOR MEASURED CONDUCTIVITY AND RELATIVE PERMITTIVITY BASED ON IEC 62209-2 STANDARD

Body Tissue Simulant Measurement									
Frequency [MHz]	Description	Dielectric Parameters		Tissue Temp. [°C]	C_{ϵ}	C_{σ}	$\Delta\epsilon$	$\Delta\sigma$	ΔSAR
		ϵ_r	s [s/m]						
	Reference result	52.7	1.95	N/A	C_{ϵ}	C_{σ}	$\Delta\epsilon$	$\Delta\sigma$	ΔSAR
	$\pm 5\%$ window	50.065 to 55.335	1.852 to 2.047						
2412	Oct. 08, 2015	53.2271	1.9317	22	-0.23	0.49	1.00	-0.94	-0.68
2437	Oct. 08, 2015	53.2158	1.9326	22	-0.22	0.48	0.98	-0.89	-0.65
2462	Oct. 08, 2015	53.4412	1.9393	22	-0.22	0.48	1.41	-0.55	-0.58

Body Tissue Simulant Measurement									
Frequency [MHz]	Description	Dielectric Parameters		Tissue Temp. [°C]	C_{ϵ}	C_{σ}	$\Delta\epsilon$	$\Delta\sigma$	ΔSAR
		ϵ_r	s [s/m]						
	Reference result	48.2	6	N/A	C_{ϵ}	C_{σ}	$\Delta\epsilon$	$\Delta\sigma$	ΔSAR
	$\pm 10\%$ window	43.38 to 53.02	5.4 to 6.6						
5180	Oct. 12, 2015	44.215	5.525	22	-0.20	-0.02	-8.27	-7.92	1.86
5240	Oct. 12, 2015	44.283	5.537	22	-0.20	-0.03	-8.13	-7.72	1.85
5745	Oct. 12, 2015	44.166	6.216	22	-0.20	-0.05	-8.37	3.60	1.50
5785	Oct. 12, 2015	44.178	6.235	22	-0.20	-0.05	-8.34	3.92	1.48
5825	Oct. 12, 2015	44.169	6.258	22	-0.20	-0.04	-8.36	4.30	1.47

Data No:	Test Mode	Separation Distance (cm)	Ch.	ΔSA	Measured SAR 1g(W/kg)	Corrected SAR 1g(W/kg)
1	802.11b	0.5	11	-0.58	0.528	0.531
2	802.11b	0.5	11	-0.58	0.601	0.605
3	802.11b	0.5	11	-0.58	0.567	0.570
4	802.11b	0.5	11	-0.58	0.046	0.046
5	802.11b	0.5	11	-0.58	0.354	0.356
6	802.11b	0.5	11	-0.58	0.028	0.028
7	802.11g	0.5	6	-0.65	0.653	0.657
8	802.11n 20	0.5	6	-0.65	0.775	0.780
9	802.11n 20	0.5	11	-0.58	0.858	0.863
10	802.11n 40	0.5	9	-0.58	0.644	0.648
11	802.11a Band 1	0.5	48	1.85	0.117	0.115
12	802.11a Band 1	0.5	48	1.85	0.276	0.271
13	802.11a Band 1	0.5	48	1.85	0.754	0.741
14	802.11a Band 1	0.5	48	1.85	0.726	0.712
15	802.11a Band 1	0.5	48	1.85	0.002	0.002
16	802.11a Band 1	0.5	48	1.85	0.010	0.009
17	802.11a Band 4	0.5	165	1.47	0.479	0.471
18	802.11n 20 Band 1	0.5	36	1.86	0.171	0.168
19	802.11n 20 Band 4	0.5	165	1.47	0.199	0.196
20	802.11n 40 Band 1	0.5	46	1.85	0.198	0.195
21	802.11n 40 Band 4	0.5	151	1.50	0.173	0.171
22	802.11ac 20 Band 1	0.5	48	1.85	0.130	0.127
23	802.11ac 20 Band 4	0.5	165	1.47	0.114	0.112
Note:						

F.2 SAR correction formula

From [13] and [14], a linear relationship was found between the percent change in SAR (denoted ΔSAR) and the percent change in the permittivity and conductivity from the target values in Table 1 (denoted $\Delta \epsilon_r$ and $\Delta \sigma$, respectively). This linear relationship agrees with the results of Kuster and Balzano [48] and Bit-Babik et al. [2]. The relationship is given by:

$$\Delta SAR = c_\epsilon \Delta \epsilon_r + c_\sigma \Delta \sigma \quad (F.1)$$

where

$c_\epsilon = \partial(\Delta SAR)/\partial(\Delta \epsilon)$ is the coefficients representing the sensitivity of SAR to permittivity where SAR is normalized to output power;

$c_\sigma = \partial(\Delta SAR)/\partial(\Delta \sigma)$ is the coefficients representing the sensitivity of SAR to conductivity, where SAR is normalized to output power.

The values of c_ϵ and c_σ have a simple relationship with frequency that can be described using polynomial equations. For the 1 g averaged SAR c_ϵ and c_σ are given by

$$c_\epsilon = -7,854 \times 10^{-4} f^3 + 9,402 \times 10^{-3} f^2 - 2,742 \times 10^{-2} f - 0,2026 \quad (F.2)$$


$$c_\sigma = 9,804 \times 10^{-3} f^3 - 8,661 \times 10^{-2} f^2 + 2,981 \times 10^{-2} f + 0,7829 \quad (F.3)$$

where

f is the frequency in GHz.

$$\text{Corrected SAR} = \text{Measured SAR} * ((100 + (\Delta SAR \times -1)) / 100) \quad (\text{Equation 1})$$

Antenna Location

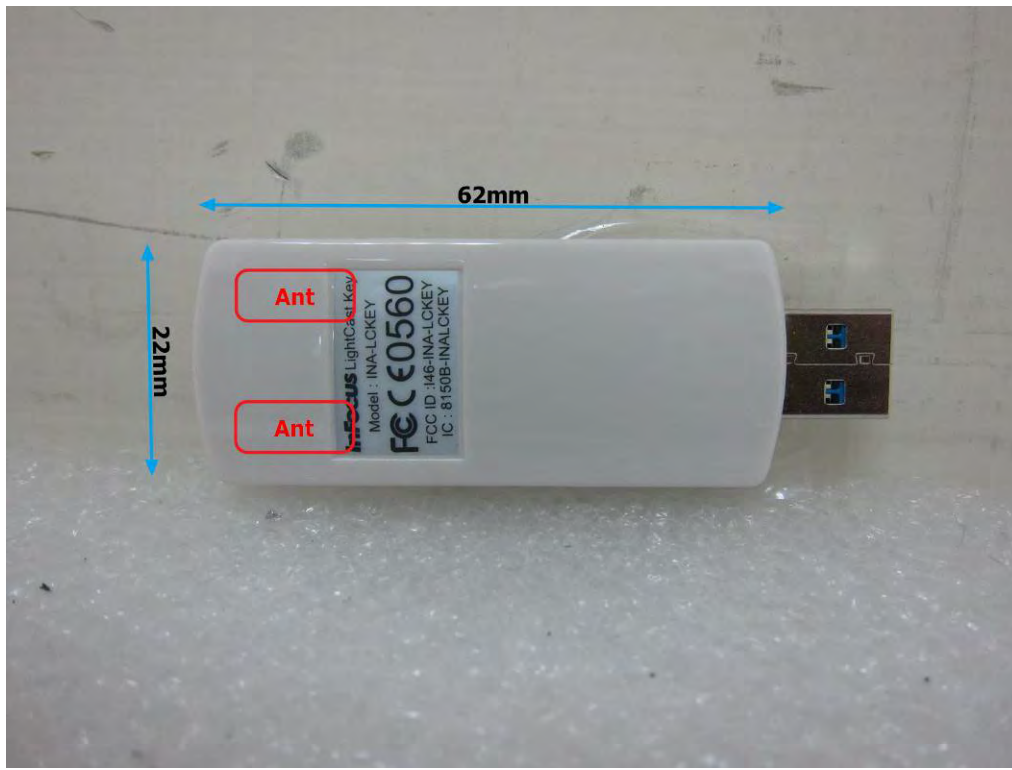


10 Exposure Assessment Measurement Uncertainty


Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	c_i^1 (1-g)	c_i^1 (10-g)	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	$\sqrt{3}$	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	$\sqrt{3}$	$\sqrt{cp}$	$\sqrt{cp}$	4.4	4.4
Boundary Effect	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	rectangular	$\sqrt{3}$	1	1	2.7	2.7
Detection Limit	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	$\sqrt{3}$	1	1	0.5	0.5
Integration Time	1.7	rectangular	$\sqrt{3}$	1	1	1.0	1.0
RF Ambient Condition	3.0	rectangular	$\sqrt{3}$	1	1	1.7	1.7
Probe Positioner Mech.	0.4	rectangular	$\sqrt{3}$	1	1	0.2	0.2
Restriction							
Probe Positioning with respect to Phantom Shell	2.9	rectangular	$\sqrt{3}$	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	$\sqrt{3}$	1	1	2.1	2.1
Test Sample Positioning	4.0	normal	1	1	1	4.0	4.0
Device Holder Uncertainty	2.0	normal	1	1	1	2.0	2.0
Drift of Output Power	1.2	rectangular	$\sqrt{3}$	1	1	0.7	0.7
Phantom and Setup							
Phantom Uncertainty(shape & thickness tolerance)	3.4	rectangular	$\sqrt{3}$	1	1	2.0	2.0
Liquid Conductivity(target)	5.0	rectangular	$\sqrt{3}$	0.7	0.5	2.0	1.4
Liquid Conductivity(meas.)	2.9	normal	1	0.7	0.5	2.0	1.4
Liquid Permittivity(target)	5.0	rectangular	$\sqrt{3}$	0.6	0.5	1.7	1.4
Liquid Permittivity(meas.)	3.3	normal	1	0.6	0.5	2.0	1.6
Combined Uncertainty		RSS				9.7	9.3
Combined Uncertainty (coverage factor=2)		Normal(k=2)				19.4	18.7

Appendix A Test Setup Photos


direct Inserted to Notebook

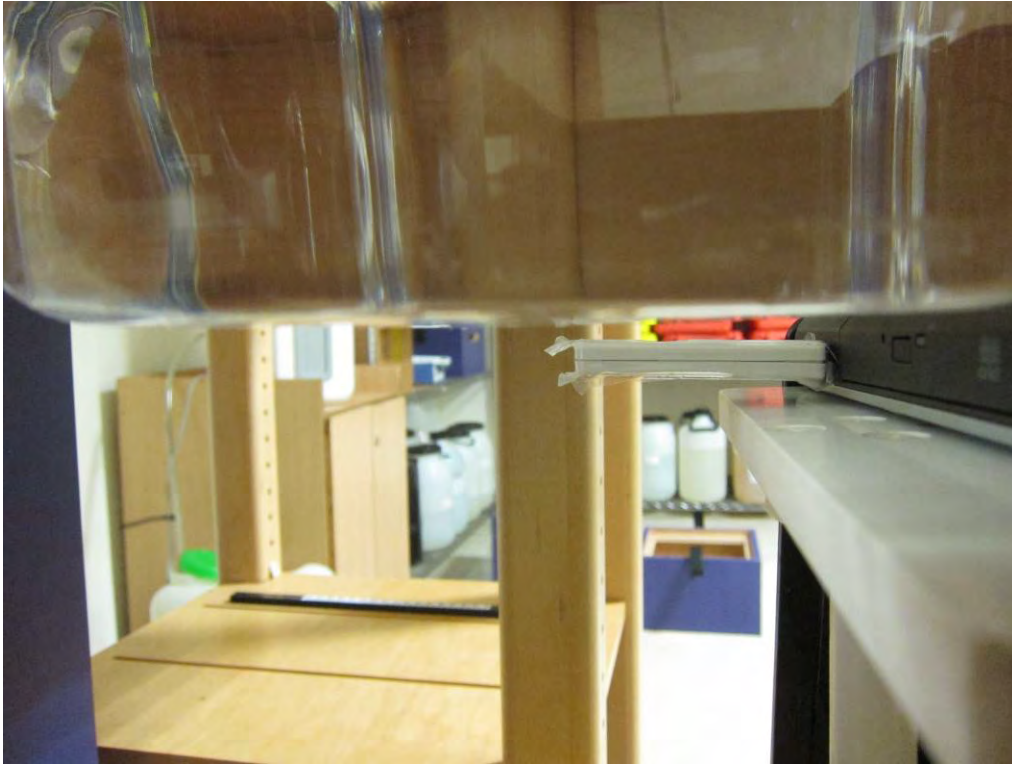


Horizontal-Down

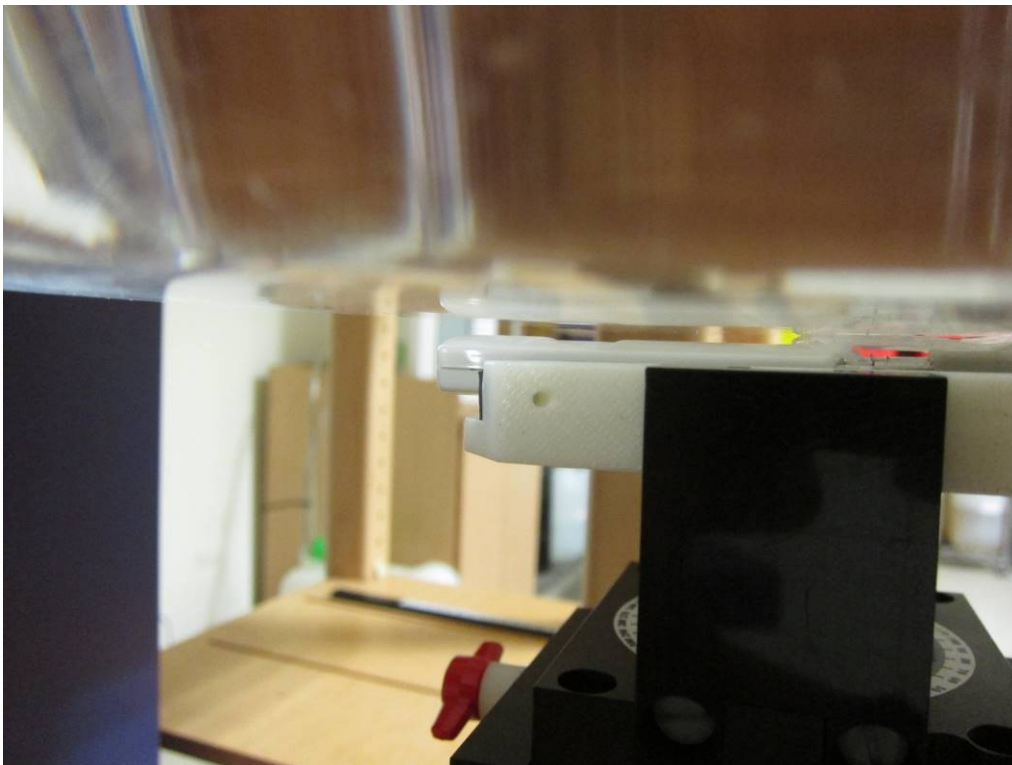


Horizontal-Up

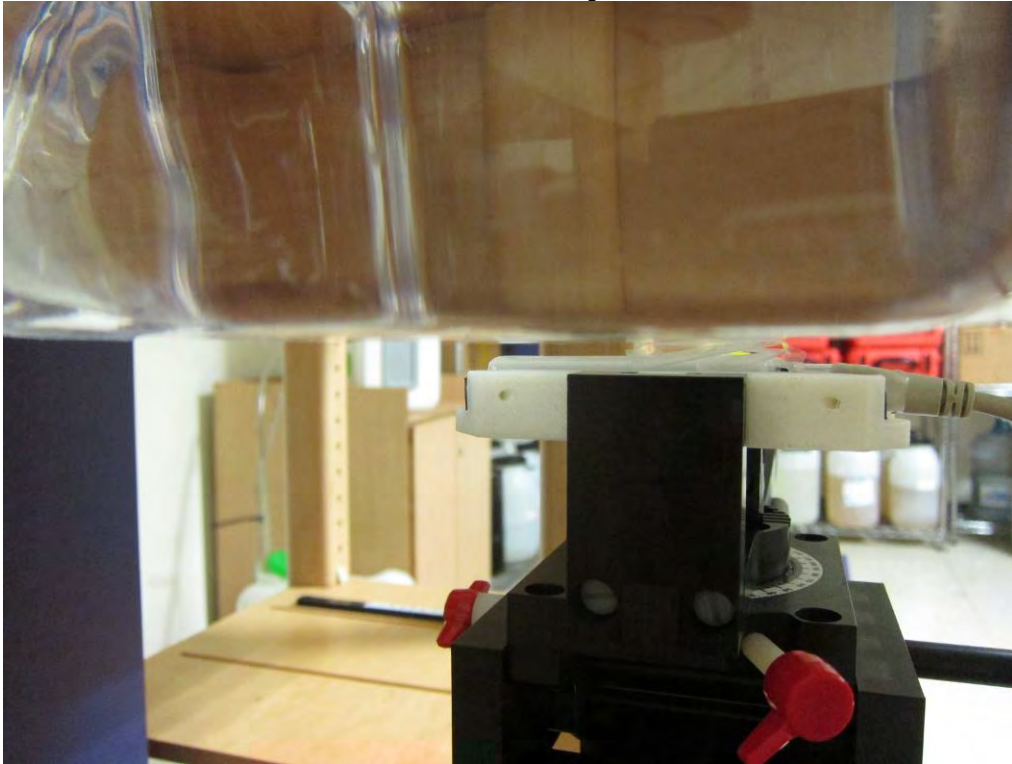

Vertical-Front

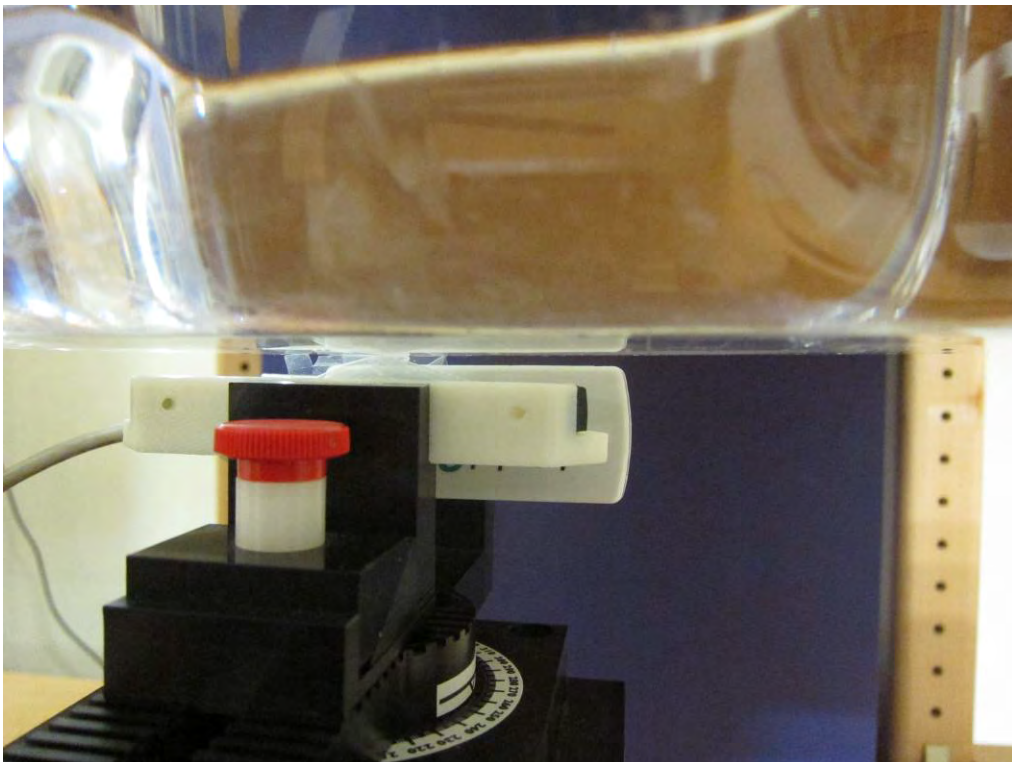

Vertical-Back

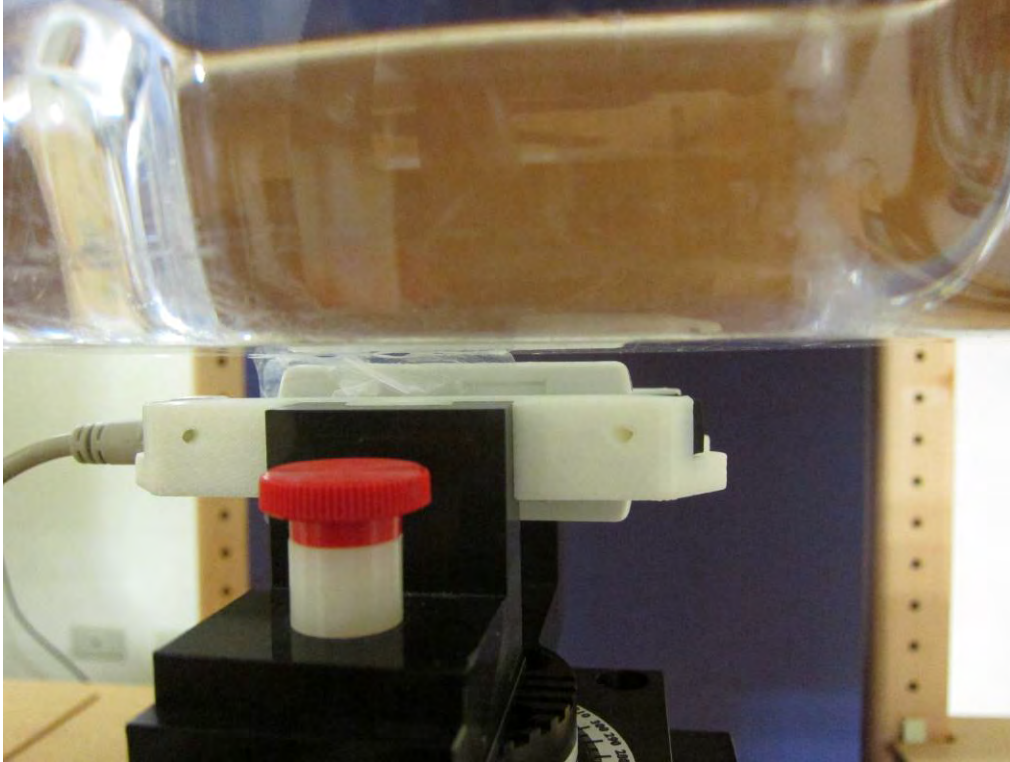

USB Top



Appendix B DUT Photos

Refer to FCC Part15.247 report.

Appendix C: System Performance Check

Refer to Appendix C

Appendix D: SAR Measurement Data

Refer to Appendix D

Appendix E: Probe Calibration Certificate

Refer to Appendix E

Appendix F: Dipole Calibration Certificate

Refer to Appendix F

~ End of Report ~

Appendix C: System Performance Check

Report Date : 08-Oct-2015
By Operator : Dino Chen
DUT : Dipole
Frequency : 2450.00 MHz
Max. Transmit Pwr : 1 W

APREL ALSAS-10U System Description

Phantom Data

Name : Universal Phantom
Type : ALS-P-UP-1

Tissue Data

Type : Body
Frequency : 2450.00 MHz


Probe Data

Name : E-field Probe
Model : ALS-E-020
Serial No. : 266
Last Calib. Date : 12-Jan-2015

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Area Scan : 9x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm
Separation : 1cm



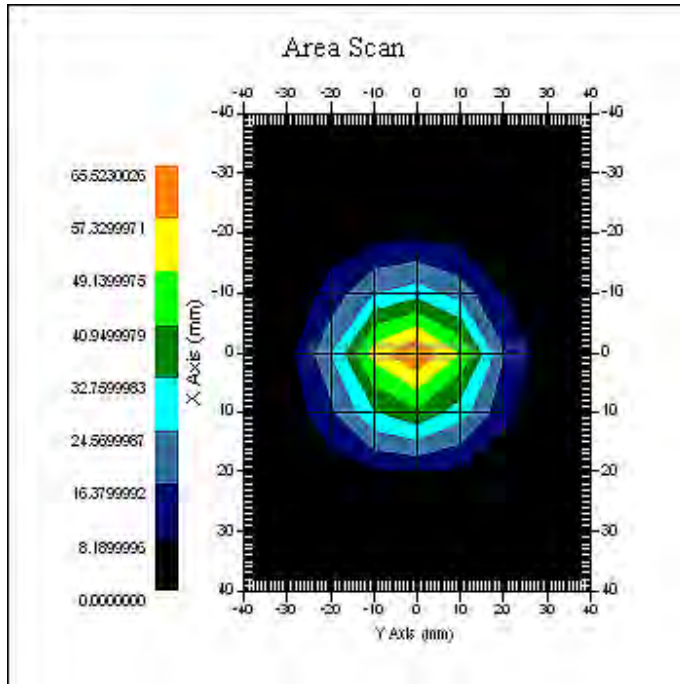

1 gram SAR value : 53.119 W/kg
10 gram SAR value : 25.041 W/kg
Area Scan Peak SAR : 65.321 W/kg
Zoom Scan Peak SAR : 104.035 W/kg

Appendix C: System Performance Check

Report Date : 12-Oct-2015
By Operator : Dino Chen
DUT : Dipole
Frequency : 5200.00 MHz
Max. Transmit Pwr : 1 W

APREL ALSAS-10U System Description

Phantom Data

Name : Universal Phantom
Type : ALS-P-UP-1

Tissue Data

Type : Body
Frequency : 5200.00 MHz


Probe Data

Name : E-field Probe
Model : ALS-E-020
Serial No. : 266
Last Calib. Date : 12-Jan-2015

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Area Scan : 9x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm
Separation : 1cm



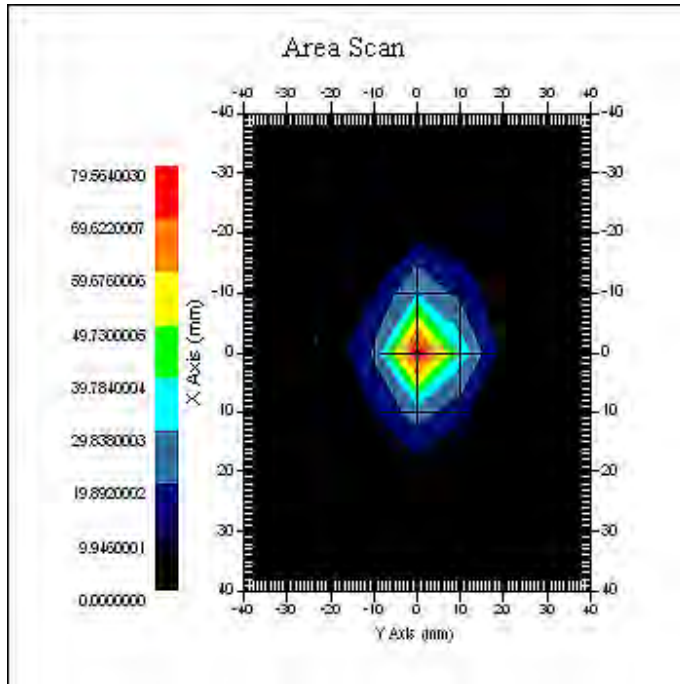

1 gram SAR value : 65.013 W/kg
10 gram SAR value : 22.002 W/kg
Area Scan Peak SAR : 79.438 W/kg
Zoom Scan Peak SAR : 188.614 W/kg

Appendix C: System Performance Check

Report Date : 12-Oct-2015
By Operator : Dino Chen
DUT : Dipole
Frequency : 5800.00 MHz
Max. Transmit Pwr : 1 W

APREL ALSAS-10U System Description

Phantom Data

Name : Universal Phantom
Type : ALS-P-UP-1

Tissue Data

Type : Body
Frequency : 5800.00 MHz


Probe Data

Name : E-field Probe
Model : ALS-E-020
Serial No. : 266
Last Calib. Date : 12-Jan-2015

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Area Scan : 9x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm
Separation : 1cm



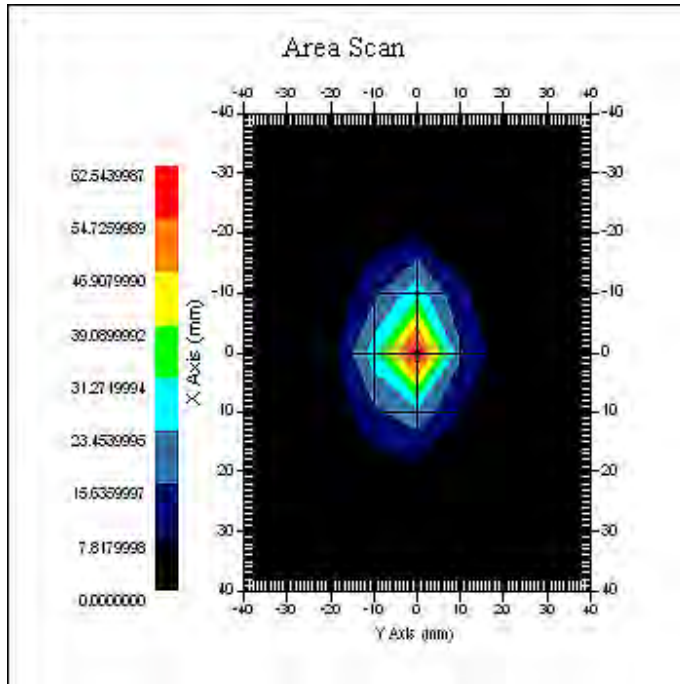

1 gram SAR value : 58.411 W/kg
10 gram SAR value : 19.105 W/kg
Area Scan Peak SAR : 62.617 W/kg
Zoom Scan Peak SAR : 162.009 W/kg

Appendix D: SAR Measurement Data

Data No.	Band	Mode	Test Position	Separation Distance (cm)	Channel	SAR 1g(W/kg)
1	Wifi	802.11b	direct Inserted to Notebook	0.5	11	0.493
2	Wifi	802.11b	with USB Cable connect to Notebook Horizontal-Down	0.5	11	0.561
3	Wifi	802.11b	with USB Cable connect to Notebook Horizontal-Up	0.5	11	0.529
4	Wifi	802.11b	with USB Cable connect to Notebook Vertical-Front	0.5	11	0.043
5	Wifi	802.11b	with USB Cable connect to Notebook Vertical-Back	0.5	11	0.330
6	Wifi	802.11b	with USB Cable connect to USB Top	0.5	11	0.026
7	Wifi	802.11g	with USB Cable connect to Notebook Horizontal-Down	0.5	6	0.632
8	Wifi	802.11n 20	with USB Cable connect to Notebook Horizontal-Down	0.5	6	0.718
9	Wifi	802.11n 20	with USB Cable connect to Notebook Horizontal-Up	0.5	11	0.803
10	Wifi	802.11n 40	with USB Cable connect to Notebook Horizontal-Up	0.5	9	0.624

Data No.	Band	Mode	Test Position	Separation Distance (cm)	Channel	SAR 1g(W/kg)
11	Wifi	802.11a Band 1	direct Inserted to Notebook	0.5	48	0.110
12	Wifi	802.11a Band 1	with USB Cable connect to Notebook Horizontal-Down	0.5	48	0.259
13	Wifi	802.11a Band 1	with USB Cable connect to Notebook Horizontal-Up	0.5	48	0.709
14	Wifi	802.11a Band 1	with USB Cable connect to Notebook Vertical-Front	0.5	48	0.682
15	Wifi	802.11a Band 1	with USB Cable connect to Notebook Vertical-Back	0.5	48	0.002
16	Wifi	802.11a Band 1	with USB Cable connect to USB Top	0.5	48	0.009
17	Wifi	802.11a Band 4	with USB Cable connect to Notebook Horizontal-Up	0.5	165	0.358
18	Wifi	802.11n 20 Band 1	with USB Cable connect to Notebook Horizontal-Up	0.5	36	0.139
19	Wifi	802.11n 20 Band 4	with USB Cable connect to Notebook Horizontal-Up	0.5	165	0.186
20	Wifi	802.11n 40 Band 1	with USB Cable connect to Notebook Horizontal-Up	0.5	46	0.162
21	Wifi	802.11n 40 Band 4	with USB Cable connect to Notebook Horizontal-Up	0.5	151	0.172
22	Wifi	802.11ac 20 Band 1	with USB Cable connect to Notebook Horizontal-Up	0.5	48	0.114
23	Wifi	802.11ac 20 Band 4	with USB Cable connect to Notebook Horizontal-Up	0.5	165	0.107

Data No. 1:

Report Date : 08-Oct-2015
By Operator : 123
Measurement Date : 08-Oct-2015
Starting Time : 08-Oct-2015 08:48:10 AM
End Time : 08-Oct-2015 09:04:06 AM
Scanning Time : 956 secs
Product Data
Device Name : 15LR278
Serial No. : NA
Type : Other
Model : USB Dongle
Frequency : 2450.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 1 min(s)
Length : 62 mm
Width : 22 mm
Depth : 10 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.001 W/kg
Power Drift-Finish: 0.000 W/kg
Power Drift (%) : 0.000
Picture : C:\alsas\bitmap\Device-2.bmp

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : User Define
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 2450B
Frequency : 2450.00 MHz
Last Calib. Date : 08-Oct-2015
Temperature : 22.00 °C
Ambient Temp. : 22.00 °C
Humidity : 62.00 RH%
Epsilon (Dielectric Constant): 53.32
Sigma : 1.93 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field
Model : E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 12-Jan-2015
Frequency : 2450.00 MHz
Duty Cycle Factor (CreF): 1
Conversion Factor : 4.9
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Set-up Date : 08-Oct-2015
Set-up Time : 8:10:54 AM
Area Scan : 7x6x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Touch
Separation : 0
Channel : High

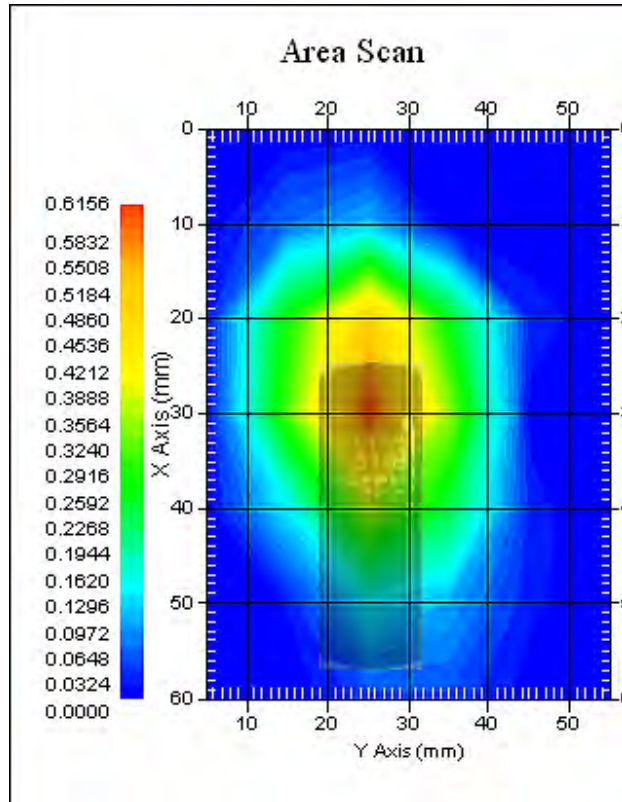

The system detected 1 maxima.
 Selected highest maxima # = 1.
 Maxima #1 coordinates: X = 30.050, Y = 24.900
 1 gram SAR value : 0.493 W/kg
 10 gram SAR value : 0.200 W/kg
 Area Scan Peak SAR : 0.607 W/kg
 Zoom Scan Peak SAR : 1.050 W/kg

Maxima Summary:
 Maxima #1
 Maxima coordinates: X = 30.050, Y = 24.900
 1 gram SAR value : 0.493 W/kg
 10 gram SAR value : 0.200 W/kg
 Area Scan Peak SAR : 0.607 W/kg
 Zoom Scan Peak SAR : 1.050 W/kg

Data No. 2:

Report Date : 08-Oct-2015
By Operator : 123
Measurement Date : 08-Oct-2015
Starting Time : 08-Oct-2015 10:04:12 AM
End Time : 08-Oct-2015 10:20:05 AM
Scanning Time : 953 secs
Product Data
Device Name : 15LR278
Serial No. : NA
Type : Other
Model : USB Dongle
Frequency : 2450.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 1 min(s)
Length : 62 mm
Width : 22 mm
Depth : 10 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.821 W/kg
Power Drift-Finish: 0.788 W/kg
Power Drift (%) : -4.009
Picture : C:\alsas\bitmap\Device-2.bmp

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : User Define
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 2450B
Frequency : 2450.00 MHz
Last Calib. Date : 08-Oct-2015
Temperature : 22.00 °C
Ambient Temp. : 22.00 °C
Humidity : 62.00 RH%
Epsilon (Dielectric Constant): 53.32
Sigma : 1.93 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field
Model : E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 12-Jan-2015
Frequency : 2450.00 MHz
Duty Cycle Factor (CreF): 1
Conversion Factor : 4.9
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Set-up Date : 08-Oct-2015
Set-up Time : 8:10:54 AM
Area Scan : 7x6x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Touch
Separation : 0
Channel : High

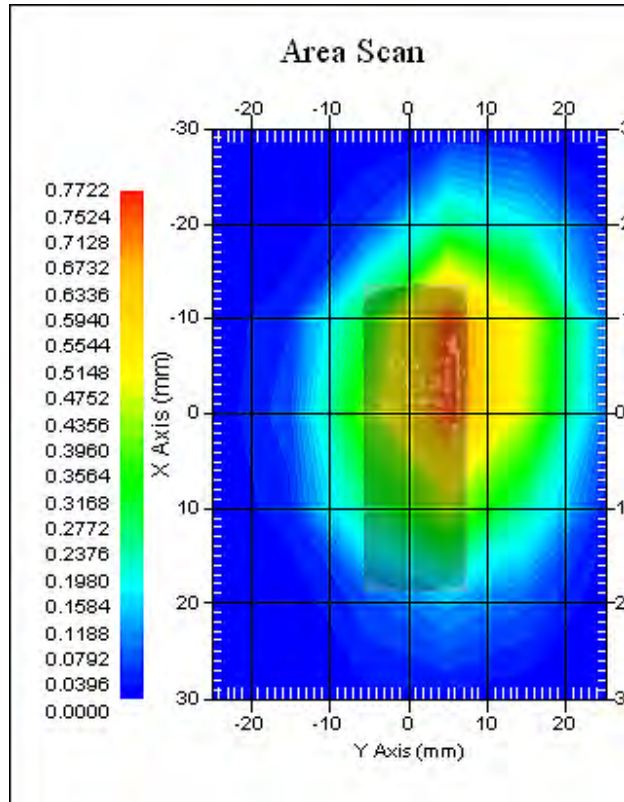

The system detected 1 maxima.
 Selected highest maxima # = 1.
 Maxima #1 coordinates: X = -7.970, Y = 4.900
 1 gram SAR value : 0.561 W/kg
 10 gram SAR value : 0.227 W/kg
 Area Scan Peak SAR : 0.753 W/kg
 Zoom Scan Peak SAR : 1.231 W/kg

Maxima Summary:

Maxima #1

Maxima coordinates: X = -7.970, Y = 4.900

1 gram SAR value : 0.561 W/kg

10 gram SAR value : 0.227 W/kg

Area Scan Peak SAR : 0.753 W/kg

Zoom Scan Peak SAR : 1.231 W/kg

Data No. 3:

Report Date : 08-Oct-2015
By Operator : 123
Measurement Date : 08-Oct-2015
Starting Time : 08-Oct-2015 09:24:35 AM
End Time : 08-Oct-2015 09:40:32 AM
Scanning Time : 957 secs
Product Data
Device Name : 15LR278
Serial No. : NA
Type : Other
Model : USB Dongle
Frequency : 2450.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 1 min(s)
Length : 62 mm
Width : 22 mm
Depth : 10 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.798 W/kg
Power Drift-Finish: 0.761 W/kg
Power Drift (%) : -4.559
Picture : C:\alsas\bitmap\Device-2.bmp

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : User Define
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 2450B
Frequency : 2450.00 MHz
Last Calib. Date : 08-Oct-2015
Temperature : 22.00 °C
Ambient Temp. : 22.00 °C
Humidity : 62.00 RH%
Epsilon (Dielectric Constant): 53.32
Sigma : 1.93 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field
Model : E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 12-Jan-2015
Frequency : 2450.00 MHz
Duty Cycle Factor (CreF): 1
Conversion Factor : 4.9
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Set-up Date : 08-Oct-2015
Set-up Time : 8:10:54 AM
Area Scan : 7x6x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Touch
Separation : 0
Channel : High

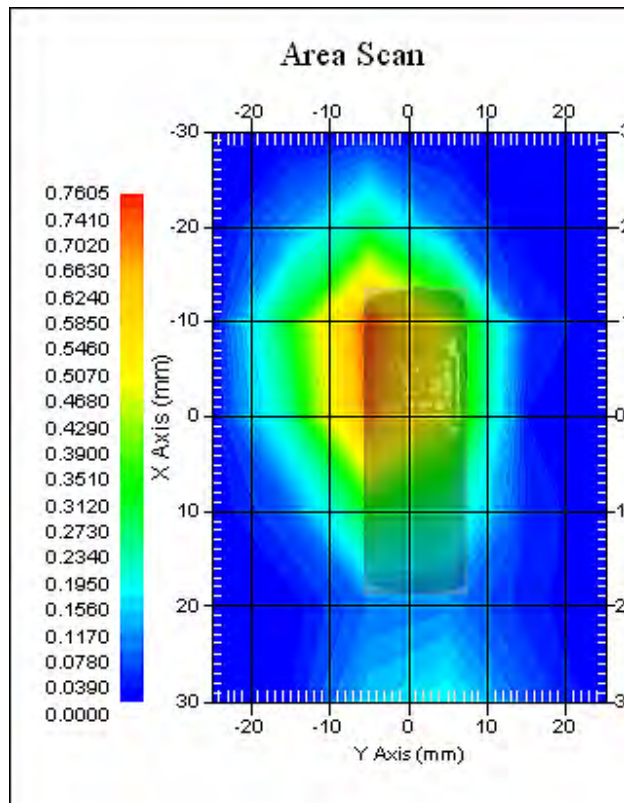

The system detected 1 maxima.
 Selected highest maxima # = 1.
 Maxima #1 coordinates: X = -1.950, Y = -5.000
 1 gram SAR value : 0.529 W/kg
 10 gram SAR value : 0.206 W/kg
 Area Scan Peak SAR : 0.742 W/kg
 Zoom Scan Peak SAR : 1.151 W/kg

Maxima Summary:
 Maxima #1
 Maxima coordinates: X = -1.950, Y = -5.000
 1 gram SAR value : 0.529 W/kg
 10 gram SAR value : 0.206 W/kg
 Area Scan Peak SAR : 0.742 W/kg
 Zoom Scan Peak SAR : 1.151 W/kg

Data No. 4:

Report Date : 08-Oct-2015
By Operator : 123
Measurement Date : 08-Oct-2015
Starting Time : 08-Oct-2015 10:50:12 AM
End Time : 08-Oct-2015 11:05:59 AM
Scanning Time : 947 secs
Product Data
Device Name : 15LR278
Serial No. : NA
Type : Other
Model : USB Dongle
Frequency : 2450.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 1 min(s)
Length : 10 mm
Width : 62 mm
Depth : 22 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.001 W/kg
Power Drift-Finish: 0.000 W/kg
Power Drift (%) : 0.000
Picture : C:\alsas\bitmap\Device-3.bmp

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : User Define
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 2450B
Frequency : 2450.00 MHz
Last Calib. Date : 08-Oct-2015
Temperature : 22.00 °C
Ambient Temp. : 22.00 °C
Humidity : 62.00 RH%
Epsilon (Dielectric Constant): 53.32
Sigma : 1.93 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field
Model : E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 12-Jan-2015
Frequency : 2450.00 MHz
Duty Cycle Factor (CreF): 1
Conversion Factor : 4.9
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Set-up Date : 08-Oct-2015
Set-up Time : 8:10:54 AM
Area Scan : 5x8x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Touch
Separation : 0
Channel : High

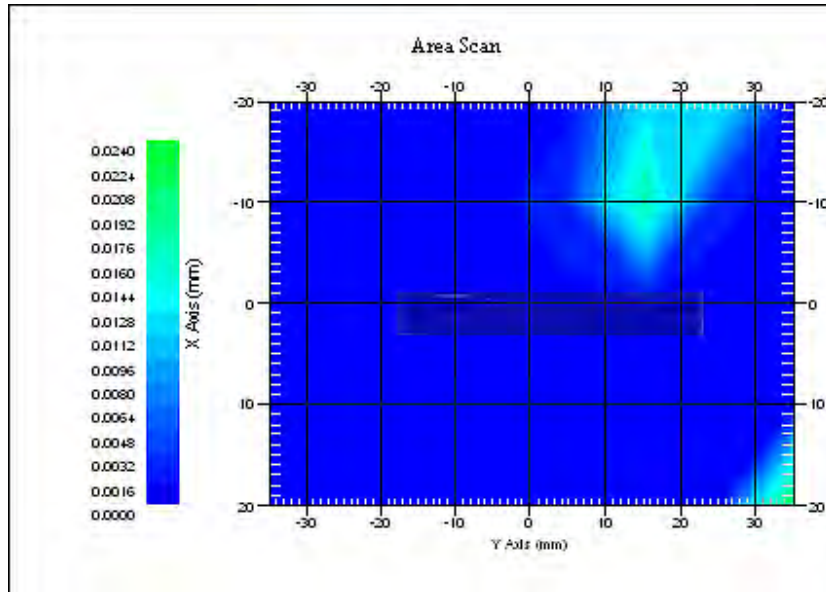

The system detected 1 maxima.
Selected highest maxima # = 1.
Maxima #1 coordinates: X = -17.920, Y = 22.900
1 gram SAR value : 0.043 W/kg
10 gram SAR value : 0.008 W/kg
Area Scan Peak SAR : 0.023 W/kg
Zoom Scan Peak SAR : 0.170 W/kg

Maxima Summary:
Maxima #1
Maxima coordinates: X = -17.920, Y = 22.900
1 gram SAR value : 0.043 W/kg
10 gram SAR value : 0.008 W/kg
Area Scan Peak SAR : 0.023 W/kg
Zoom Scan Peak SAR : 0.170 W/kg

Data No. 5:

Report Date : 08-Oct-2015
By Operator : 123
Measurement Date : 08-Oct-2015
Starting Time : 08-Oct-2015 10:29:33 AM
End Time : 08-Oct-2015 10:45:09 AM
Scanning Time : 936 secs
Product Data
Device Name : 15LR278
Serial No. : NA
Type : Other
Model : USB Dongle
Frequency : 2450.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 1 min(s)
Length : 10 mm
Width : 62 mm
Depth : 22 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.569 W/kg
Power Drift-Finish: 0.544 W/kg
Power Drift (%) : -4.300
Picture : C:\alsas\bitmap\Device-3.bmp

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : User Define
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 2450B
Frequency : 2450.00 MHz
Last Calib. Date : 08-Oct-2015
Temperature : 22.00 °C
Ambient Temp. : 22.00 °C
Humidity : 62.00 RH%
Epsilon (Dielectric Constant): 53.32
Sigma : 1.93 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field
Model : E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 12-Jan-2015
Frequency : 2450.00 MHz
Duty Cycle Factor (CreF): 1
Conversion Factor : 4.9
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Set-up Date : 08-Oct-2015
Set-up Time : 8:10:54 AM
Area Scan : 5x8x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Touch
Separation : 0
Channel : High

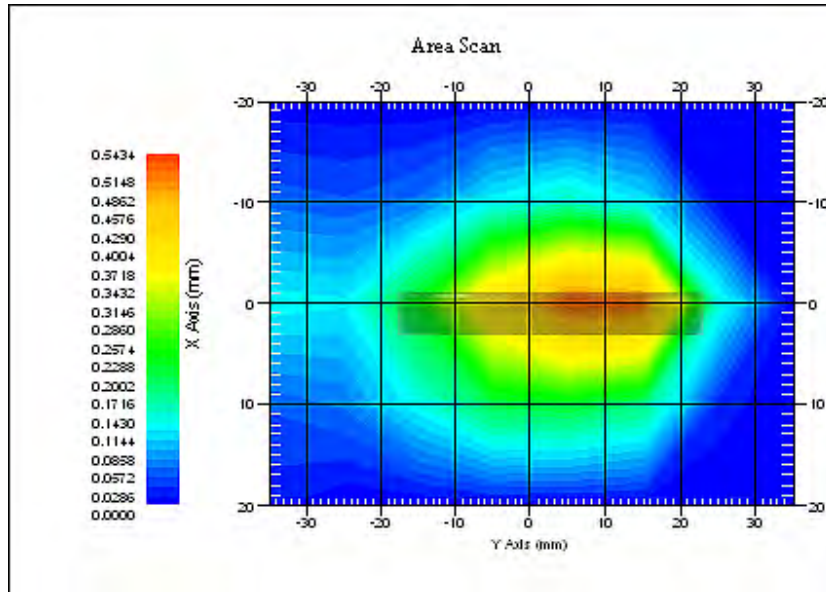

The system detected 1 maxima.
Selected highest maxima # = 1.
Maxima #1 coordinates: X = 0.080, Y = 4.900
1 gram SAR value : 0.330 W/kg
10 gram SAR value : 0.113 W/kg
Area Scan Peak SAR : 0.532 W/kg
Zoom Scan Peak SAR : 0.790 W/kg

Maxima Summary:
Maxima #1
Maxima coordinates: X = 0.080, Y = 4.900
1 gram SAR value : 0.330 W/kg
10 gram SAR value : 0.113 W/kg
Area Scan Peak SAR : 0.532 W/kg
Zoom Scan Peak SAR : 0.790 W/kg

Data No. 6:

Report Date : 08-Oct-2015
By Operator : 123
Measurement Date : 08-Oct-2015
Starting Time : 08-Oct-2015 08:17:49 AM
End Time : 08-Oct-2015 08:31:15 AM
Scanning Time : 806 secs
Product Data
Device Name : 15LR278
Serial No. : NA
Type : Other
Model : USB Dongle
Frequency : 2450.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 1 min(s)
Length : 10 mm
Width : 22 mm
Depth : 62 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.054 W/kg
Power Drift-Finish: 0.051 W/kg
Power Drift (%) : -4.733
Picture : C:\alsas\bitmap\Device-1.bmp

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : User Define
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 2450B
Frequency : 2450.00 MHz
Last Calib. Date : 08-Oct-2015
Temperature : 22.00 °C
Ambient Temp. : 22.00 °C
Humidity : 62.00 RH%
Epsilon (Dielectric Constant): 53.32
Sigma : 1.93 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field
Model : E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 12-Jan-2015
Frequency : 2450.00 MHz
Duty Cycle Factor (CreF): 1
Conversion Factor : 4.9
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Set-up Date : 08-Oct-2015
Set-up Time : 8:10:54 AM
Area Scan : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Touch
Separation : 0
Channel : High

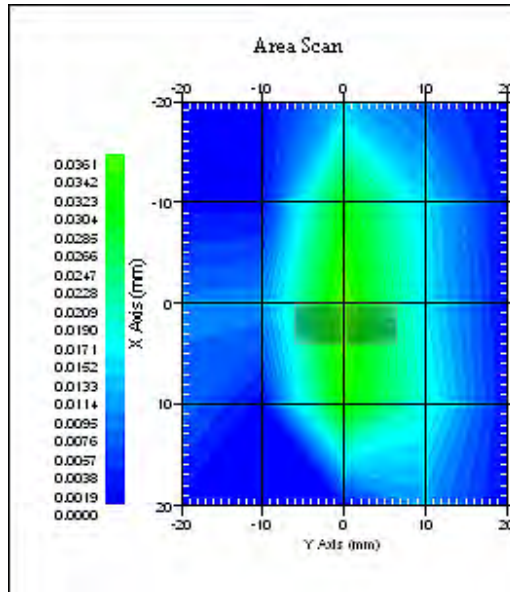

The system detected 1 maxima.
 Selected highest maxima # = 1.
 Maxima #1 coordinates: X = 8.060, Y = 0.000
 1 gram SAR value : 0.026 W/kg
 10 gram SAR value : 0.009 W/kg
 Area Scan Peak SAR : 0.036 W/kg
 Zoom Scan Peak SAR : 0.090 W/kg

Maxima Summary:
 Maxima #1
 Maxima coordinates: X = 8.060, Y = 0.000
 1 gram SAR value : 0.026 W/kg
 10 gram SAR value : 0.009 W/kg
 Area Scan Peak SAR : 0.036 W/kg
 Zoom Scan Peak SAR : 0.090 W/kg

Data No. 7:

Report Date : 08-Oct-2015
By Operator : 123
Measurement Date : 08-Oct-2015
Starting Time : 08-Oct-2015 04:13:55 PM
End Time : 08-Oct-2015 04:28:52 PM
Scanning Time : 897 secs
Product Data
Device Name : 15LR278
Serial No. : NA
Type : Other
Model : USB Dongle
Frequency : 2450.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 1 min(s)
Length : 62 mm
Width : 22 mm
Depth : 10 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.001 W/kg
Power Drift-Finish: 0.000 W/kg
Power Drift (%) : 0.000
Picture : C:\alsas\bitmap\Device-13.bmp

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : User Define
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 2450B
Frequency : 2450.00 MHz
Last Calib. Date : 08-Oct-2015
Temperature : 22.00 °C
Ambient Temp. : 22.00 °C
Humidity : 62.00 RH%
Epsilon (Dielectric Constant): 53.32
Sigma : 1.93 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field
Model : E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 12-Jan-2015
Frequency : 2450.00 MHz
Duty Cycle Factor (CreF): 1
Conversion Factor : 4.9
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Set-up Date : 08-Oct-2015
Set-up Time : 8:10:54 AM
Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Touch
Separation : 0
Channel : Mid

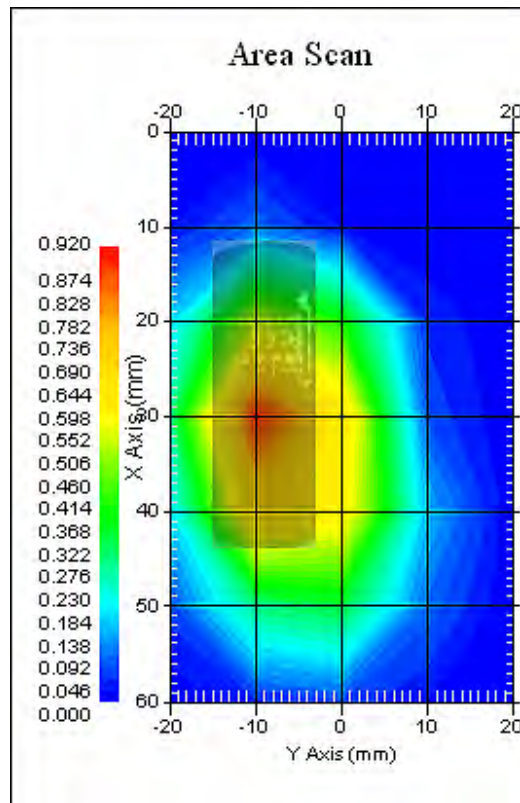

The system detected 1 maxima.
 Selected highest maxima # = 1.
 Maxima #1 coordinates: X = 30.050, Y = -10.000
 1 gram SAR value : 0.632 W/kg
 10 gram SAR value : 0.264 W/kg
 Area Scan Peak SAR : 0.898 W/kg
 Zoom Scan Peak SAR : 1.401 W/kg

Maxima Summary:
 Maxima #1
 Maxima coordinates: X = 30.050, Y = -10.000
 1 gram SAR value : 0.632 W/kg
 10 gram SAR value : 0.264 W/kg
 Area Scan Peak SAR : 0.898 W/kg
 Zoom Scan Peak SAR : 1.401 W/kg

Data No. 8:

Report Date : 08-Oct-2015
By Operator : 123
Measurement Date : 08-Oct-2015
Starting Time : 08-Oct-2015 01:03:52 PM
End Time : 08-Oct-2015 01:18:40 PM
Scanning Time : 888 secs
Product Data
Device Name : 15LR278
Serial No. : NA
Type : Other
Model : USB Dongle
Frequency : 2450.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 1 min(s)
Length : 62 mm
Width : 22 mm
Depth : 10 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.048 W/kg
Power Drift-Finish: 0.045 W/kg
Power Drift (%) : -4.401
Picture : C:\alsas\bitmap\Device-4.bmp

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : User Define
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 2450B
Frequency : 2450.00 MHz
Last Calib. Date : 08-Oct-2015
Temperature : 22.00 °C
Ambient Temp. : 22.00 °C
Humidity : 62.00 RH%
Epsilon (Dielectric Constant): 53.32
Sigma : 1.93 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field
Model : E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 12-Jan-2015
Frequency : 2450.00 MHz
Duty Cycle Factor (CreF): 1
Conversion Factor : 4.9
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Set-up Date : 08-Oct-2015
Set-up Time : 8:10:54 AM
Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Touch
Separation : 0
Channel : Mid

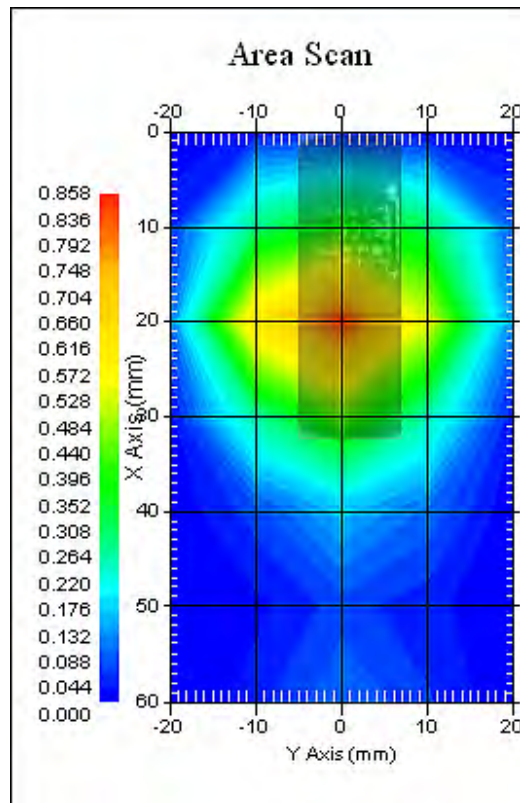

The system detected 1 maxima.
Selected highest maxima # = 1.
Maxima #1 coordinates: X = 20.050, Y = 0.000
1 gram SAR value : 0.718 W/kg
10 gram SAR value : 0.242 W/kg
Area Scan Peak SAR : 0.848 W/kg
Zoom Scan Peak SAR : 1.371 W/kg

Maxima Summary:

Maxima #1

Maxima coordinates: X = 20.050, Y = 0.000

1 gram SAR value : 0.718 W/kg

10 gram SAR value : 0.242 W/kg

Area Scan Peak SAR : 0.848 W/kg

Zoom Scan Peak SAR : 1.371 W/kg

Data No. 9:

Report Date : 08-Oct-2015
By Operator : 123
Measurement Date : 08-Oct-2015
Starting Time : 08-Oct-2015 12:45:25 PM
End Time : 08-Oct-2015 01:00:26 PM
Scanning Time : 901 secs
Product Data
Device Name : 15LR278
Serial No. : NA
Type : Other
Model : USB Dongle
Frequency : 2450.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 1 min(s)
Length : 62 mm
Width : 22 mm
Depth : 10 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.001 W/kg
Power Drift-Finish: 0.000 W/kg
Power Drift (%) : 0.000
Picture : C:\alsas\bitmap\Device-13.bmp

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : User Define
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 2450B
Frequency : 2450.00 MHz
Last Calib. Date : 08-Oct-2015
Temperature : 22.00 °C
Ambient Temp. : 22.00 °C
Humidity : 62.00 RH%
Epsilon (Dielectric Constant): 53.32
Sigma : 1.93 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field
Model : E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 12-Jan-2015
Frequency : 2450.00 MHz
Duty Cycle Factor (CreF): 1
Conversion Factor : 4.9
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Set-up Date : 08-Oct-2015
Set-up Time : 8:10:54 AM
Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Touch
Separation : 0
Channel : High

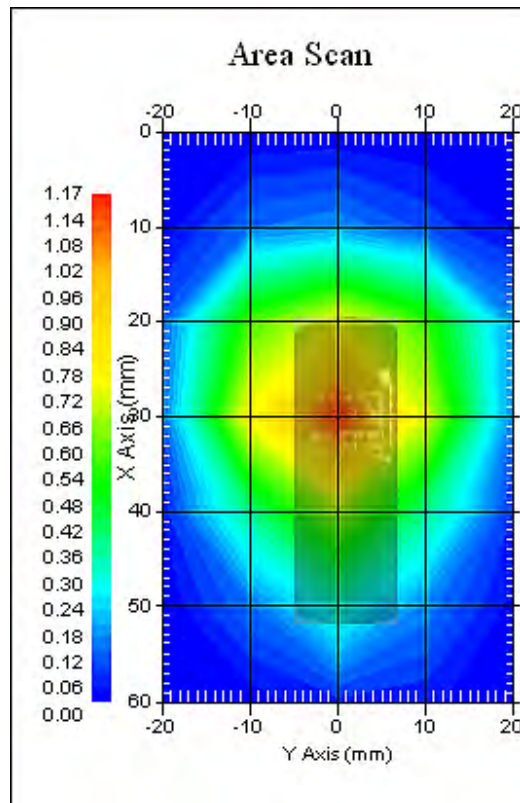

The system detected 1 maxima.
 Selected highest maxima # = 1.
 Maxima #1 coordinates: X = 30.050, Y = 0.000
 1 gram SAR value : 0.803 W/kg
 10 gram SAR value : 0.331 W/kg
 Area Scan Peak SAR : 1.170 W/kg
 Zoom Scan Peak SAR : 1.711 W/kg

Maxima Summary:

Maxima #1

Maxima coordinates: X = 30.050, Y = 0.000
 1 gram SAR value : 0.803 W/kg
 10 gram SAR value : 0.331 W/kg
 Area Scan Peak SAR : 1.170 W/kg
 Zoom Scan Peak SAR : 1.711 W/kg

Data No. 10:

Report Date : 08-Oct-2015
By Operator : 123
Measurement Date : 08-Oct-2015
Starting Time : 08-Oct-2015 03:09:11 PM
End Time : 08-Oct-2015 03:23:54 PM
Scanning Time : 883 secs
Product Data
Device Name : 15LR278
Serial No. : NA
Type : Other
Model : USB Dongle
Frequency : 2450.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 1 min(s)
Length : 62 mm
Width : 22 mm
Depth : 10 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.001 W/kg
Power Drift-Finish: 0.000 W/kg
Power Drift (%) : 0.000
Picture : C:\alsas\bitmap\Device-13.bmp

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : User Define
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 2450B
Frequency : 2450.00 MHz
Last Calib. Date : 08-Oct-2015
Temperature : 22.00 °C
Ambient Temp. : 22.00 °C
Humidity : 62.00 RH%
Epsilon (Dielectric Constant): 53.32
Sigma : 1.93 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field
Model : E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 12-Jan-2015
Frequency : 2450.00 MHz
Duty Cycle Factor (CreF): 1
Conversion Factor : 4.9
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Set-up Date : 08-Oct-2015
Set-up Time : 8:10:54 AM
Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data

DUT Position : Touch
Separation : 0
Channel : High

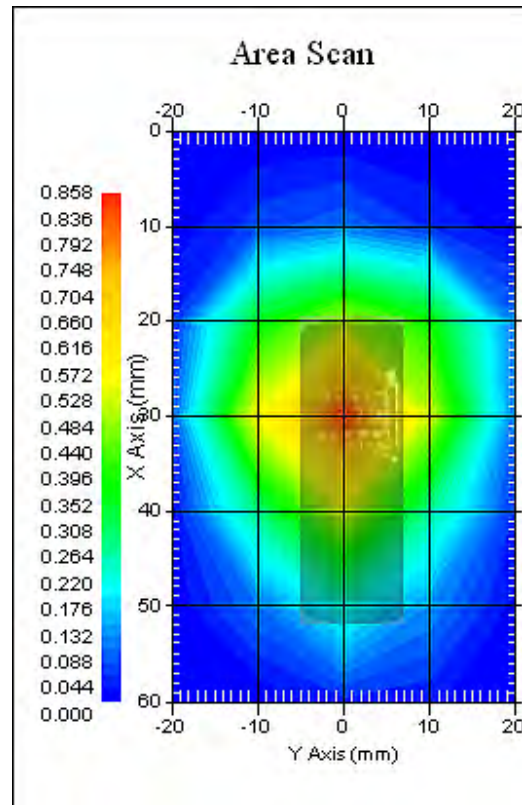

The system detected 1 maxima.
 Selected highest maxima # = 1.
 Maxima #1 coordinates: X = 30.060, Y = 0.000
 1 gram SAR value : 0.624 W/kg
 10 gram SAR value : 0.253 W/kg
 Area Scan Peak SAR : 0.849 W/kg
 Zoom Scan Peak SAR : 1.291 W/kg

Maxima Summary:

Maxima #1

Maxima coordinates: X = 30.060, Y = 0.000
 1 gram SAR value : 0.624 W/kg
 10 gram SAR value : 0.253 W/kg
 Area Scan Peak SAR : 0.849 W/kg
 Zoom Scan Peak SAR : 1.291 W/kg

Data No. 11:

Report Date : 12-Oct-2015
By Operator : 123
Measurement Date : 12-Oct-2015
Starting Time : 12-Oct-2015 01:07:17 PM
End Time : 12-Oct-2015 01:38:40 PM
Scanning Time : 1883 secs
Product Data
Device Name : 15LR278
Serial No. : NA
Type : Other
Model : USB Dongle
Frequency : 5200.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 1 min(s)
Length : 62 mm
Width : 22 mm
Depth : 10 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.083 W/kg
Power Drift-Finish: 0.079 W/kg
Power Drift (%) : -4.796
Picture : C:\alsas\bitmap\Device-11.bmp

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : User Define
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 5200B
Frequency : 5200.00 MHz
Last Calib. Date : 12-Oct-2015
Temperature : 22.00 °C
Ambient Temp. : 22.00 °C
Humidity : 54.00 RH%
Epsilon (Dielectric Constant): 44.23
Sigma : 5.53 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field
Model : E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 12-Jan-2015
Frequency : 5250.00 MHz
Duty Cycle Factor (CreF): 1
Conversion Factor : 3.3
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Set-up Date : 12-Oct-2015
Set-up Time : 9:27:31 AM
Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 9x9x7 : Measurement x=4mm, y=4mm, z=5mm

Other Data

DUT Position : Touch
Separation : 0
Channel : High

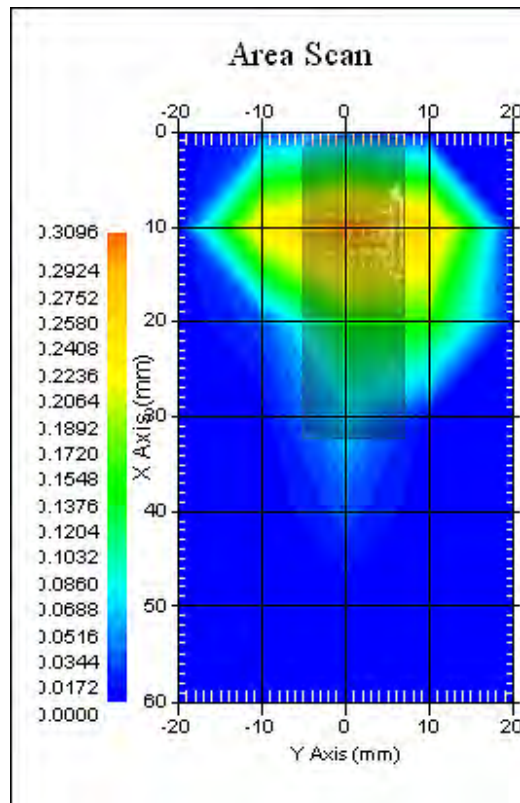

The system detected 1 maxima.
 Selected highest maxima # = 1.
 Maxima #1 coordinates: X = 14.060, Y = 0.000
 1 gram SAR value : 0.110 W/kg
 10 gram SAR value : 0.037 W/kg
 Area Scan Peak SAR : 0.305 W/kg
 Zoom Scan Peak SAR : 0.660 W/kg

Maxima Summary:

Maxima #1

Maxima coordinates: X = 14.060, Y = 0.000

1 gram SAR value : 0.110 W/kg

10 gram SAR value : 0.037 W/kg

Area Scan Peak SAR : 0.305 W/kg

Zoom Scan Peak SAR : 0.660 W/kg

Data No. 12:

Report Date : 12-Oct-2015
By Operator : 123
Measurement Date : 12-Oct-2015
Starting Time : 12-Oct-2015 08:22:25 AM
End Time : 12-Oct-2015 08:53:37 AM
Scanning Time : 1872 secs
Product Data
Device Name : 15LR278
Serial No. : NA
Type : Other
Model : USB Dongle
Frequency : 2450.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 1 min(s)
Length : 62 mm
Width : 22 mm
Depth : 10 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.109 W/kg
Power Drift-Finish: 0.104 W/kg
Power Drift (%) : -4.085
Picture : C:\alsas\bitmap\Device-4.bmp

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : User Define
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 5200B
Frequency : 5200.00 MHz
Last Calib. Date : 12-Oct-2015
Temperature : 22.00 °C
Ambient Temp. : 22.00 °C
Humidity : 54.00 RH%
Epsilon (Dielectric Constant): 44.23
Sigma : 5.53 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field
Model : E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 12-Jan-2015
Frequency : 5250.00 MHz
Duty Cycle Factor (CreF): 1
Conversion Factor : 3.3
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Set-up Date : 12-Oct-2015
Set-up Time : 8:10:54 AM
Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 9x9x7 : Measurement x=4mm, y=4mm, z=5mm

Other Data

DUT Position : Touch
Separation : 0
Channel : High

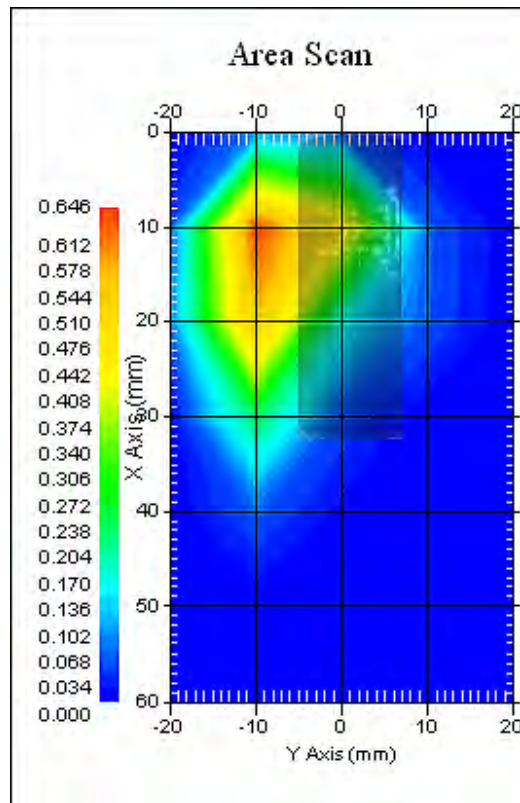

The system detected 1 maxima.
 Selected highest maxima # = 1.
 Maxima #1 coordinates: X = 14.100, Y = -10.000
 1 gram SAR value : 0.259 W/kg
 10 gram SAR value : 0.060 W/kg
 Area Scan Peak SAR : 0.642 W/kg
 Zoom Scan Peak SAR : 1.000 W/kg

Maxima Summary:
 Maxima #1
 Maxima coordinates: X = 14.100, Y = -10.000
 1 gram SAR value : 0.259 W/kg
 10 gram SAR value : 0.060 W/kg
 Area Scan Peak SAR : 0.642 W/kg
 Zoom Scan Peak SAR : 1.000 W/kg

Data No. 13:

Report Date : 12-Oct-2015
By Operator : 123
Measurement Date : 12-Oct-2015
Starting Time : 12-Oct-2015 08:47:11 AM
End Time : 12-Oct-2015 09:18:45 AM
Scanning Time : 1894 secs
Product Data
Device Name : 15LR278
Serial No. : NA
Type : Other
Model : USB Dongle
Frequency : 5200.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 1 min(s)
Length : 62 mm
Width : 22 mm
Depth : 10 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.429 W/kg
Power Drift-Finish: 0.41 W/kg
Power Drift (%) : -4.250
Picture : C:\alsas\bitmap\Device-7.bmp

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : User Define
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 5200B
Frequency : 5200.00 MHz
Last Calib. Date : 12-Oct-2015
Temperature : 22.00 °C
Ambient Temp. : 22.00 °C
Humidity : 54.00 RH%
Epsilon (Dielectric Constant): 44.23
Sigma : 5.53 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field
Model : E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 12-Jan-2015
Frequency : 5250.00 MHz
Duty Cycle Factor (CreF): 1
Conversion Factor : 3.3
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Set-up Date : 13-Oct-2015
Set-up Time : 8:45:57 AM
Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 9x9x7 : Measurement x=4mm, y=4mm, z=5mm

Other Data

DUT Position : Touch
Separation : 0
Channel : High

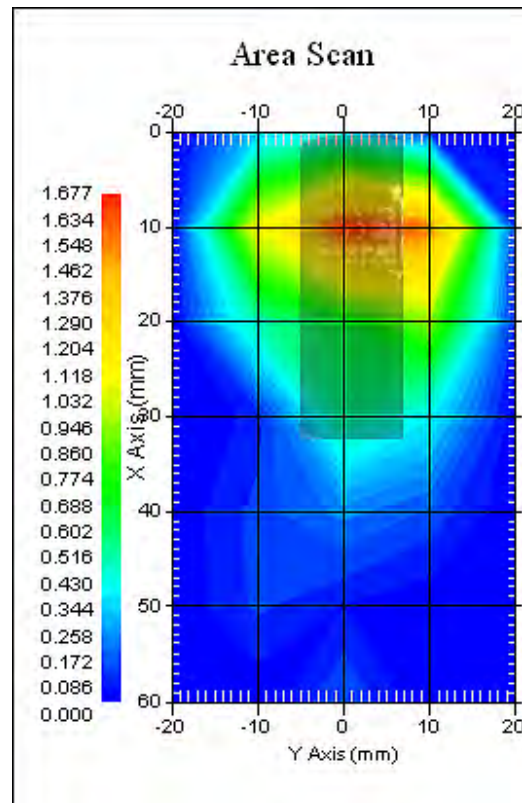

The system detected 1 maxima.
 Selected highest maxima # = 1.
 Maxima #1 coordinates: X = 10.080, Y = 3.900
 1 gram SAR value : 0.709 W/kg
 10 gram SAR value : 0.196 W/kg
 Area Scan Peak SAR : 1.665 W/kg
 Zoom Scan Peak SAR : 2.281 W/kg

Maxima Summary:

Maxima #1

Maxima coordinates: X = 10.080, Y = 3.900

1 gram SAR value : 0.709 W/kg

10 gram SAR value : 0.196 W/kg

Area Scan Peak SAR : 1.665 W/kg

Zoom Scan Peak SAR : 2.281 W/kg

Data No. 14:

Report Date : 12-Oct-2015
By Operator : 123
Measurement Date : 12-Oct-2015
Starting Time : 12-Oct-2015 04:54:28 PM
End Time : 12-Oct-2015 05:26:40 PM
Scanning Time : 1932 secs
Product Data
Device Name : 15LR278
Serial No. : NA
Type : Other
Model : USB Dongle
Frequency : 2450.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 1 min(s)
Length : 10 mm
Width : 62 mm
Depth : 22 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.633 W/kg
Power Drift-Finish: 0.602 W/kg
Power Drift (%) : -4.896
Picture : C:\alsas\bitmap\Device-6.bmp

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : User Define
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 5200B
Frequency : 5200.00 MHz
Last Calib. Date : 12-Oct-2015
Temperature : 22.00 °C
Ambient Temp. : 22.00 °C
Humidity : 54.00 RH%
Epsilon (Dielectric Constant): 44.23
Sigma : 5.53 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field
Model : E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 12-Jan-2015
Frequency : 5250.00 MHz
Duty Cycle Factor (CreF): 1
Conversion Factor : 3.3
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Set-up Date : 12-Oct-2015
Set-up Time : 8:10:54 AM
Area Scan : 5x8x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 9x9x7 : Measurement x=4mm, y=4mm, z=5mm

Other Data

DUT Position : Touch
Separation : 0
Channel : High

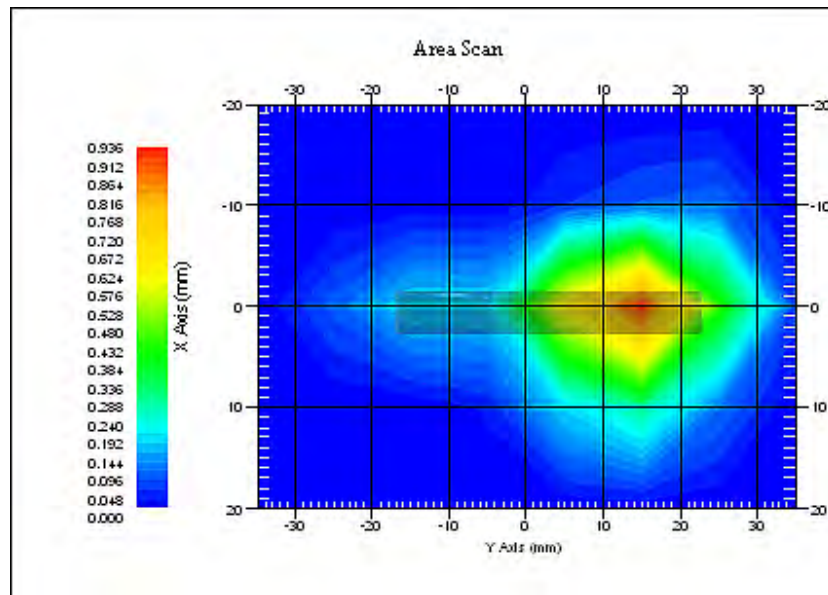

The system detected 1 maxima.
Selected highest maxima # = 1.
Maxima #1 coordinates: X = 4.060, Y = 14.900
1 gram SAR value : 0.682 W/kg
10 gram SAR value : 0.193 W/kg
Area Scan Peak SAR : 0.927 W/kg
Zoom Scan Peak SAR : 2.121 W/kg

Maxima Summary:

Maxima #1

Maxima coordinates: X = 4.060, Y = 14.900
1 gram SAR value : 0.682 W/kg
10 gram SAR value : 0.193 W/kg
Area Scan Peak SAR : 0.927 W/kg
Zoom Scan Peak SAR : 2.121 W/kg

Data No. 15:

Report Date : 12-Oct-2015
By Operator : 123
Measurement Date : 12-Oct-2015
Starting Time : 12-Oct-2015 01:53:38 PM
End Time : 12-Oct-2015 02:26:05 PM
Scanning Time : 1947 secs
Product Data
Device Name : 15LR278
Serial No. : NA
Type : Other
Model : USB Dongle
Frequency : 5200.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 1 min(s)
Length : 10 mm
Width : 62 mm
Depth : 22 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.001 W/kg
Power Drift-Finish: 0.000 W/kg
Power Drift (%) : 0.000
Picture : C:\alsas\bitmap\Device-12.bmp

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : User Define
Location : Center
Description : Uni-Phantom

Tissue Data

Type : BODY
Serial No. : 5200B
Frequency : 5200.00 MHz
Last Calib. Date : 12-Oct-2015
Temperature : 22.00 °C
Ambient Temp. : 22.00 °C
Humidity : 54.00 RH%
Epsilon (Dielectric Constant): 44.23
Sigma : 5.53 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field
Model : E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 12-Jan-2015
Frequency : 5250.00 MHz
Duty Cycle Factor (CreF): 1
Conversion Factor : 3.3
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Set-up Date : 12-Oct-2015
Set-up Time : 9:27:31 AM
Area Scan : 5x8x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 9x9x7 : Measurement x=4mm, y=4mm, z=5mm

Other Data

DUT Position : Touch
Separation : 0
Channel : High

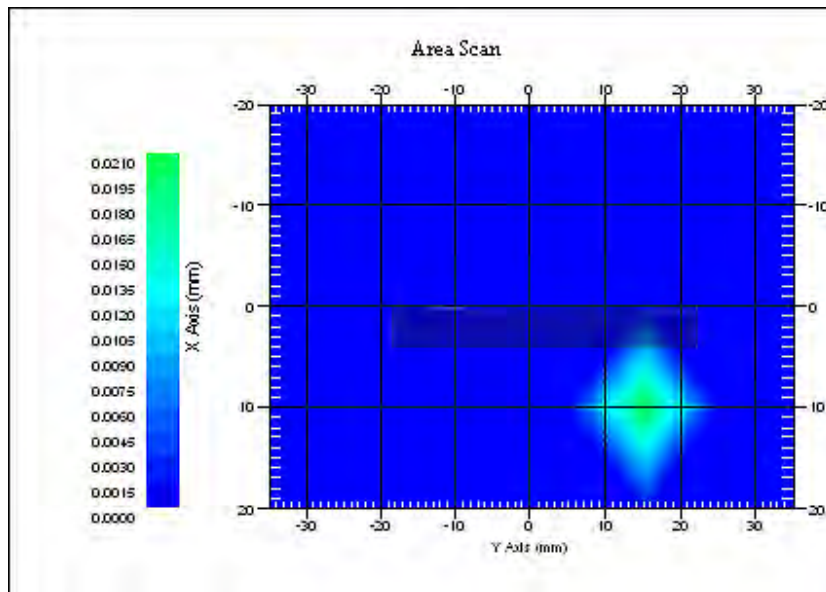

The system detected 1 maxima.
 Selected highest maxima # = 1.
 Maxima #1 coordinates: X = 22.070, Y = 10.900
 1 gram SAR value : 0.002 W/kg
 10 gram SAR value : 0.001 W/kg
 Area Scan Peak SAR : 0.021 W/kg
 Zoom Scan Peak SAR : 0.010 W/kg

Maxima Summary:
 Maxima #1
 Maxima coordinates: X = 22.070, Y = 10.900
 1 gram SAR value : 0.002 W/kg
 10 gram SAR value : 0.001 W/kg
 Area Scan Peak SAR : 0.021 W/kg
 Zoom Scan Peak SAR : 0.010 W/kg

Data No. 16:

Report Date : 12-Oct-2015
By Operator : 123
Measurement Date : 12-Oct-2015
Starting Time : 12-Oct-2015 12:25:28 PM
End Time : 12-Oct-2015 12:55:13 PM
Scanning Time : 1785 secs
Product Data
Device Name : 15LR278
Serial No. : NA
Type : Other
Model : USB Dongle
Frequency : 5200.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 1 min(s)
Length : 10 mm
Width : 22 mm
Depth : 62 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.224 W/kg
Power Drift-Finish: 0.213 W/kg
Power Drift (%) : -4.554
Picture : C:\alsas\bitmap\Device-10.bmp

Phantom Data
Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : User Define
Location : Center
Description : Uni-Phantom

Tissue Data
Type : BODY
Serial No. : 5200B
Frequency : 5200.00 MHz
Last Calib. Date : 12-Oct-2015
Temperature : 22.00 °C
Ambient Temp. : 22.00 °C
Humidity : 54.00 RH%
Epsilon (Dielectric Constant): 44.23
Sigma : 5.53 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field
Model : E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 12-Jan-2015
Frequency : 5250.00 MHz
Duty Cycle Factor (CreF): 1
Conversion Factor : 3.3
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Set-up Date : 12-Oct-2015
Set-up Time : 9:27:31 AM
Area Scan : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 9x9x7 : Measurement x=4mm, y=4mm, z=5mm

Other Data

DUT Position : Touch
Separation : 0
Channel : High

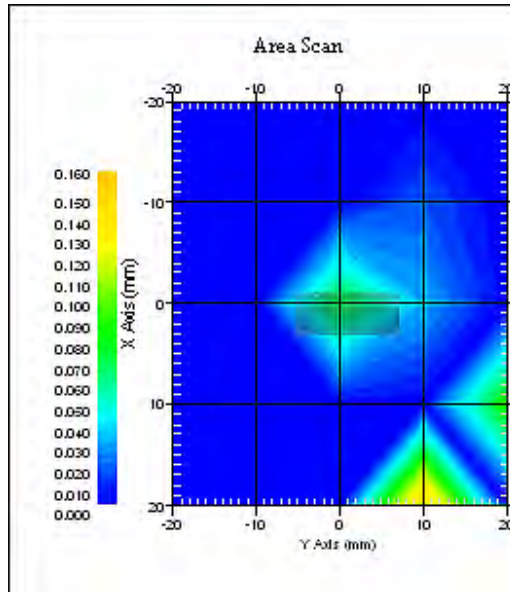

The system detected 1 maxima.
Selected highest maxima # = 1.
Maxima #1 coordinates: X = -3.900, Y = 0.000
1 gram SAR value : 0.009 W/kg
10 gram SAR value : 0.002 W/kg
Area Scan Peak SAR : 0.158 W/kg
Zoom Scan Peak SAR : 0.130 W/kg

Maxima Summary:

Maxima #1

Maxima coordinates: X = -3.900, Y = 0.000

1 gram SAR value : 0.009 W/kg

10 gram SAR value : 0.002 W/kg

Area Scan Peak SAR : 0.158 W/kg

Zoom Scan Peak SAR : 0.130 W/kg

Data No. 17:

Report Date : 12-Oct-2015
By Operator : 123
Measurement Date : 12-Oct-2015
Starting Time : 12-Oct-2015 08:48:10 AM
End Time : 12-Oct-2015 09:19:37 AM
Scanning Time : 1887 secs
Product Data
Device Name : 15LR278
Serial No. : NA
Type : Other
Model : USB Dongle
Frequency : 5800.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 1 min(s)
Length : 62 mm
Width : 22 mm
Depth : 10 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.485 W/kg
Power Drift-Finish: 0.463 W/kg
Power Drift (%) : -4.422
Picture : C:\alsas\bitmap\Device-7.bmp

Phantom Data
Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : User Define
Location : Center
Description : Uni-Phantom

Tissue Data
Type : BODY
Serial No. : 5800B
Frequency : 5800.00 MHz
Last Calib. Date : 12-Oct-2015
Temperature : 22.00 °C
Ambient Temp. : 22.00 °C
Humidity : 58.00 RH%
Epsilon (Dielectric Constant): 44.16
Sigma : 6.25 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field
Model : E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 12-Jan-2015
Frequency : 5800.00 MHz
Duty Cycle Factor (CreF): 1
Conversion Factor : 3.4
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Set-up Date : 12-Oct-2015
Set-up Time : 8:59:14 PM
Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 9x9x7 : Measurement x=4mm, y=4mm, z=5mm

Other Data

DUT Position : Touch
Separation : 0
Channel : High

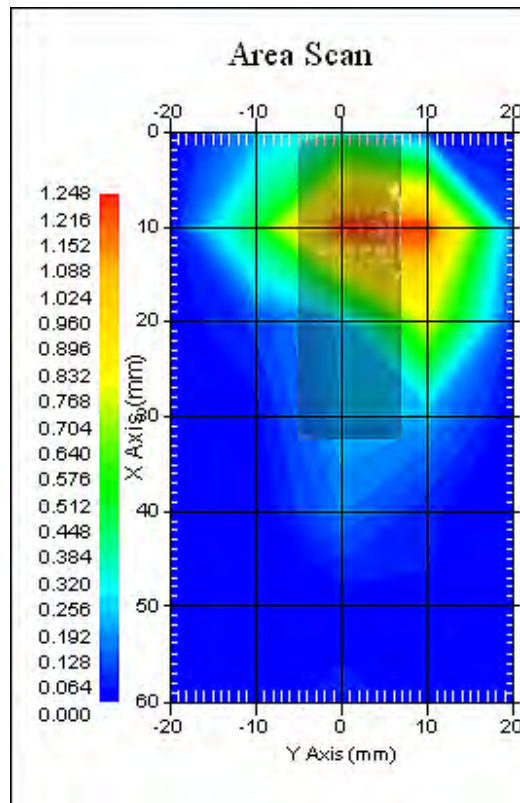

The system detected 1 maxima.
Selected highest maxima # = 1.
Maxima #1 coordinates: X = 10.130, Y = 0.000
1 gram SAR value : 0.358 W/kg
10 gram SAR value : 0.100 W/kg
Area Scan Peak SAR : 1.247 W/kg
Zoom Scan Peak SAR : 1.361 W/kg

Maxima Summary:

Maxima #1

Maxima coordinates: X = 10.130, Y = 0.000

1 gram SAR value : 0.358 W/kg

10 gram SAR value : 0.100 W/kg

Area Scan Peak SAR : 1.247 W/kg

Zoom Scan Peak SAR : 1.361 W/kg

Data No. 18:

Report Date : 12-Oct-2015
By Operator : 123
Measurement Date : 12-Oct-2015
Starting Time : 12-Oct-2015 06:28:27 PM
End Time : 12-Oct-2015 06:59:48 PM
Scanning Time : 1881 secs
Product Data
Device Name : 15LR278
Serial No. : NA
Type : Other
Model : USB Dongle
Frequency : 2450.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 1 min(s)
Length : 62 mm
Width : 22 mm
Depth : 10 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.676 W/kg
Power Drift-Finish: 0.643 W/kg
Power Drift (%) : -4.852
Picture : C:\alsas\bitmap\Device-7.bmp

Phantom Data
Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : User Define
Location : Center
Description : Uni-Phantom

Tissue Data
Type : BODY
Serial No. : 5200B
Frequency : 5200.00 MHz
Last Calib. Date : 12-Oct-2015
Temperature : 22.00 °C
Ambient Temp. : 22.00 °C
Humidity : 54.00 RH%
Epsilon (Dielectric Constant): 44.23
Sigma : 5.53 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field
Model : E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 12-Jan-2015
Frequency : 5250.00 MHz
Duty Cycle Factor (CreF): 1
Conversion Factor : 3.3
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Set-up Date : 12-Oct-2015
Set-up Time : 8:10:54 AM
Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 9x9x7 : Measurement x=4mm, y=4mm, z=5mm

Other Data

DUT Position : Touch
Separation : 0
Channel : High

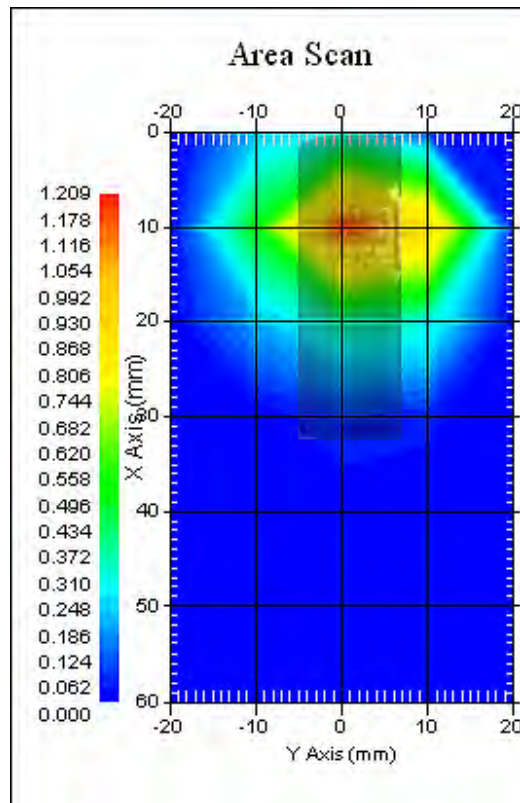

The system detected 1 maxima.
Selected highest maxima # = 1.
Maxima #1 coordinates: X = 6.100, Y = 0.000
1 gram SAR value : 0.139 W/kg
10 gram SAR value : 0.098 W/kg
Area Scan Peak SAR : 1.187 W/kg
Zoom Scan Peak SAR : 0.180 W/kg

Maxima Summary:
Maxima #1
Maxima coordinates: X = 6.100, Y = 0.000
1 gram SAR value : 0.139 W/kg
10 gram SAR value : 0.098 W/kg
Area Scan Peak SAR : 1.187 W/kg
Zoom Scan Peak SAR : 0.180 W/kg

Data No. 19:

Report Date : 12-Oct-2015
By Operator : 123
Measurement Date : 12-Oct-2015
Starting Time : 12-Oct-2015 07:36:05 AM
End Time : 12-Oct-2015 08:07:34 AM
Scanning Time : 1889 secs
Product Data
Device Name : 15LR278
Serial No. : NA
Type : Other
Model : USB Dongle
Frequency : 5800.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 1 min(s)
Length : 62 mm
Width : 22 mm
Depth : 10 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.804 W/kg
Power Drift-Finish: 0.764 W/kg
Power Drift (%) : -4.876
Picture : C:\alsas\bitmap\Device-7.bmp

Phantom Data
Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : User Define
Location : Center
Description : Uni-Phantom

Tissue Data
Type : BODY
Serial No. : 5800B
Frequency : 5800.00 MHz
Last Calib. Date : 12-Oct-2015
Temperature : 22.00 °C
Ambient Temp. : 22.00 °C
Humidity : 58.00 RH%
Epsilon (Dielectric Constant): 44.16
Sigma : 6.25 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field
Model : E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 12-Jan-2015
Frequency : 5800.00 MHz
Duty Cycle Factor (CreF): 1
Conversion Factor : 3.4
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Set-up Date : 12-Oct-2015
Set-up Time : 8:59:14 PM
Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 9x9x7 : Measurement x=4mm, y=4mm, z=5mm

Other Data

DUT Position : Touch
Separation : 0
Channel : High

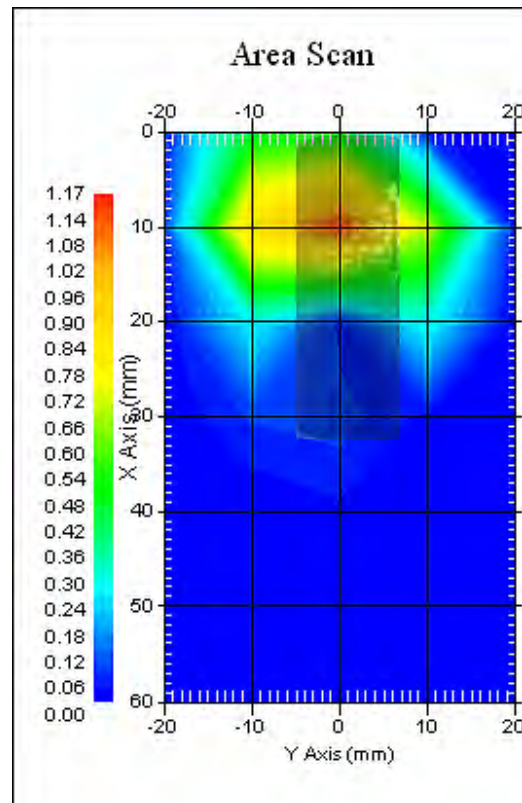

The system detected 1 maxima.
 Selected highest maxima # = 1.
 Maxima #1 coordinates: X = 6.070, Y = -8.000
 1 gram SAR value : 0.186 W/kg
 10 gram SAR value : 0.099 W/kg
 Area Scan Peak SAR : 1.145 W/kg
 Zoom Scan Peak SAR : 0.340 W/kg

Maxima Summary:

Maxima #1

Maxima coordinates: X = 6.070, Y = -8.000

1 gram SAR value : 0.186 W/kg

10 gram SAR value : 0.099 W/kg

Area Scan Peak SAR : 1.145 W/kg

Zoom Scan Peak SAR : 0.340 W/kg

Data No. 20:

Report Date : 12-Oct-2015
By Operator : 123
Measurement Date : 12-Oct-2015
Starting Time : 12-Oct-2015 07:09:34 PM
End Time : 12-Oct-2015 07:41:07 PM
Scanning Time : 1893 secs
Product Data
Device Name : 15LR278
Serial No. : NA
Type : Other
Model : USB Dongle
Frequency : 2450.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 1 min(s)
Length : 62 mm
Width : 22 mm
Depth : 10 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.502 W/kg
Power Drift-Finish: 0.481 W/kg
Power Drift (%) : -4.176
Picture : C:\alsas\bitmap\Device-7.bmp

Phantom Data
Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : User Define
Location : Center
Description : Uni-Phantom

Tissue Data
Type : BODY
Serial No. : 5200B
Frequency : 5200.00 MHz
Last Calib. Date : 12-Oct-2015
Temperature : 22.00 °C
Ambient Temp. : 22.00 °C
Humidity : 54.00 RH%
Epsilon (Dielectric Constant): 44.23
Sigma : 5.53 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field
Model : E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 12-Jan-2015
Frequency : 5250.00 MHz
Duty Cycle Factor (CreF): 1
Conversion Factor : 3.3
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Set-up Date : 12-Oct-2015
Set-up Time : 8:10:54 AM
Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 9x9x7 : Measurement x=4mm, y=4mm, z=5mm

Other Data

DUT Position : Touch
Separation : 0
Channel : High

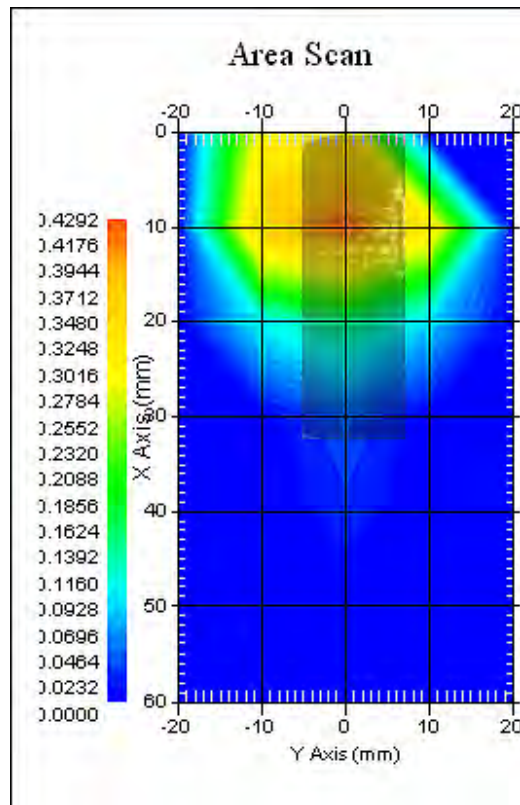

The system detected 1 maxima.
 Selected highest maxima # = 1.
 Maxima #1 coordinates: X = 2.130, Y = -8.000
 1 gram SAR value : 0.162 W/kg
 10 gram SAR value : 0.095 W/kg
 Area Scan Peak SAR : 0.424 W/kg
 Zoom Scan Peak SAR : 0.220 W/kg

Maxima Summary:

Maxima #1

Maxima coordinates: X = 2.130, Y = -8.000

1 gram SAR value : 0.162 W/kg

10 gram SAR value : 0.095 W/kg

Area Scan Peak SAR : 0.424 W/kg

Zoom Scan Peak SAR : 0.220 W/kg

Data No. 21:

Report Date : 12-Oct-2015
By Operator : 123
Measurement Date : 12-Oct-2015
Starting Time : 12-Oct-2015 09:51:03 AM
End Time : 12-Oct-2015 10:22:38 AM
Scanning Time : 1895 secs
Product Data
Device Name : 15LR278
Serial No. : NA
Type : Other
Model : USB Dongle
Frequency : 5800.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 1 min(s)
Length : 62 mm
Width : 22 mm
Depth : 10 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.543 W/kg
Power Drift-Finish: 0.516 W/kg
Power Drift (%) : -4.816
Picture : C:\alsas\bitmap\Device-7.bmp

Phantom Data
Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : User Define
Location : Center
Description : Uni-Phantom

Tissue Data
Type : BODY
Serial No. : 5800B
Frequency : 5800.00 MHz
Last Calib. Date : 12-Oct-2015
Temperature : 22.00 °C
Ambient Temp. : 22.00 °C
Humidity : 58.00 RH%
Epsilon (Dielectric Constant): 44.16
Sigma : 6.25 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field
Model : E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 12-Jan-2015
Frequency : 5800.00 MHz
Duty Cycle Factor (CreF): 1
Conversion Factor : 3.4
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Set-up Date : 13-Oct-2015
Set-up Time : 8:59:14 PM
Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 9x9x7 : Measurement x=4mm, y=4mm, z=5mm

Other Data

DUT Position : Touch
Separation : 0
Channel : Low

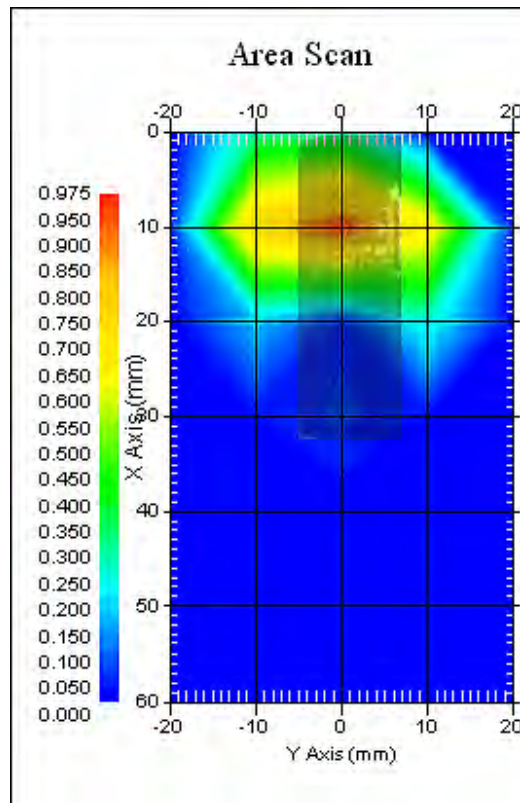

The system detected 1 maxima.
Selected highest maxima # = 1.
Maxima #1 coordinates: X = 10.100, Y = -8.000
1 gram SAR value : 0.172 W/kg
10 gram SAR value : 0.096 W/kg
Area Scan Peak SAR : 0.955 W/kg
Zoom Scan Peak SAR : 0.300 W/kg

Maxima Summary:
Maxima #1
Maxima coordinates: X = 10.100, Y = -8.000
1 gram SAR value : 0.172 W/kg
10 gram SAR value : 0.096 W/kg
Area Scan Peak SAR : 0.955 W/kg
Zoom Scan Peak SAR : 0.300 W/kg

Data No. 22:

Report Date : 12-Oct-2015
 By Operator : 123
 Measurement Date : 12-Oct-2015
 Starting Time : 12-Oct-2015 08:02:19 PM
 End Time : 12-Oct-2015 08:33:46 PM
 Scanning Time : 1887 secs
 Product Data
 Device Name : 15LR278
 Serial No. : NA
 Type : Other
 Model : USB Dongle
 Frequency : 2450.00 MHz
 Max. Transmit Pwr : 0.25 W
 Drift Time : 1 min(s)
 Length : 62 mm
 Width : 22 mm
 Depth : 10 mm
 Antenna Type : Internal
 Orientation : Touch
 Power Drift-Start : 0.333 W/kg
 Power Drift-Finish: 0.319 W/kg
 Power Drift (%) : -4.066
 Picture : C:\alsas\bitmap\Device-7.bmp

Phantom Data
 Name : APREL-Uni
 Type : Uni-Phantom
 Size (mm) : 280 x 280 x 200
 Serial No. : User Define
 Location : Center
 Description : Uni-Phantom

Tissue Data
 Type : BODY
 Serial No. : 5200B
 Frequency : 5200.00 MHz
 Last Calib. Date : 12-Oct-2015
 Temperature : 22.00 °C
 Ambient Temp. : 22.00 °C
 Humidity : 54.00 RH%
 Epsilon (Dielectric Constant): 44.23
 Sigma : 5.53 S/m
 Density : 1000.00 kg/cu. m

Probe Data


Name : E-field
Model : E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 12-Jan-2015
Frequency : 5250.00 MHz
Duty Cycle Factor (CreF): 1
Conversion Factor : 3.3
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Set-up Date : 12-Oct-2015
Set-up Time : 8:10:54 AM
Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 9x9x7 : Measurement x=4mm, y=4mm, z=5mm

Other Data

DUT Position : Touch
Separation : 0
Channel : Low

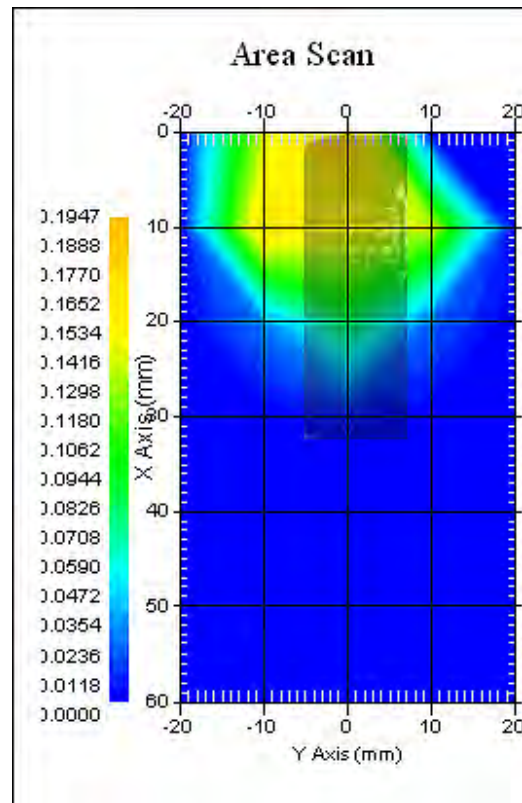

The system detected 1 maxima.
Selected highest maxima # = 1.
Maxima #1 coordinates: X = 6.100, Y = 1.900
1 gram SAR value : 0.114 W/kg
10 gram SAR value : 0.084 W/kg
Area Scan Peak SAR : 0.194 W/kg
Zoom Scan Peak SAR : 0.110 W/kg

Maxima Summary:
Maxima #1
Maxima coordinates: X = 6.100, Y = 1.900
1 gram SAR value : 0.114 W/kg
10 gram SAR value : 0.084 W/kg
Area Scan Peak SAR : 0.194 W/kg
Zoom Scan Peak SAR : 0.110 W/kg

Data No. 23:

Report Date : 12-Oct-2015
By Operator : 123
Measurement Date : 12-Oct-2015
Starting Time : 12-Oct-2015 09:31:21 AM
End Time : 12-Oct-2015 10:28:22 AM
Scanning Time : 3421 secs
Product Data
Device Name : 15LR278
Serial No. : NA
Type : Other
Model : USB Dongle
Frequency : 5800.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 1 min(s)
Length : 62 mm
Width : 22 mm
Depth : 10 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.251 W/kg
Power Drift-Finish: 0.239 W/kg
Power Drift (%) : -4.601
Picture : C:\alsas\bitmap\Device-8.bmp

Phantom Data
Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : User Define
Location : Center
Description : Uni-Phantom

Tissue Data
Type : BODY
Serial No. : 5800B
Frequency : 5800.00 MHz
Last Calib. Date : 12-Oct-2015
Temperature : 22.00 °C
Ambient Temp. : 22.00 °C
Humidity : 58.00 RH%
Epsilon (Dielectric Constant): 44.16
Sigma : 6.25 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field
Model : E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 12-Jan-2015
Frequency : 5800.00 MHz
Duty Cycle Factor (CreF): 1
Conversion Factor : 3.4
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 22.00 °C
Ambient Temp. : 22.00 °C
Set-up Date : 12-Oct-2015
Set-up Time : 8:59:14 PM
Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 9x9x7 : Measurement x=4mm, y=4mm, z=5mm

Other Data

DUT Position : Touch
Separation : 0
Channel : High

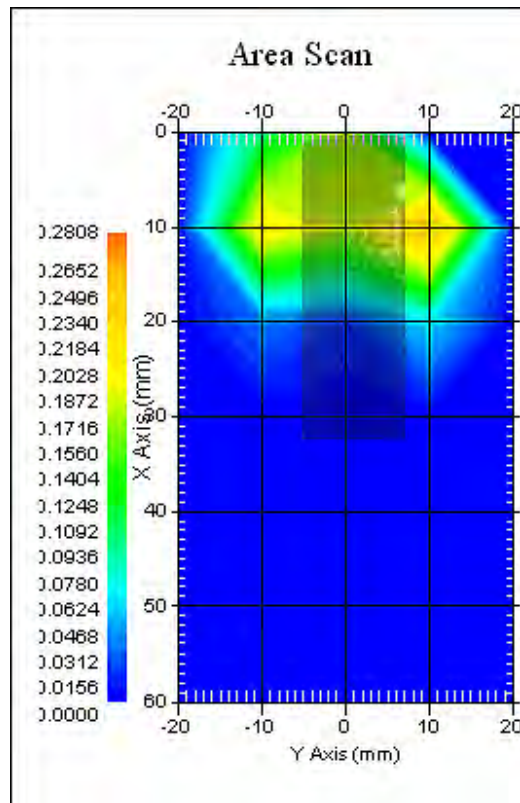

The system detected 2 maxima.
Selected highest maxima # = 2.
Maxima #2 coordinates: X = 6.080, Y = -6.000
1 gram SAR value : 0.107 W/kg
10 gram SAR value : 0.089 W/kg
Area Scan Peak SAR : 0.274 W/kg
Zoom Scan Peak SAR : 0.130 W/kg


Maxima Summary:

Maxima #1

Maxima coordinates: X = 2.100, Y = -2.000
1 gram SAR value : 0.089 W/kg
10 gram SAR value : 0.074 W/kg
Area Scan Peak SAR : 0.274 W/kg
Zoom Scan Peak SAR : 0.120 W/kg

Maxima #2

Maxima coordinates: X = 6.080, Y = -6.000
1 gram SAR value : 0.107 W/kg
10 gram SAR value : 0.089 W/kg
Area Scan Peak SAR : 0.274 W/kg
Zoom Scan Peak SAR : 0.130 W/kg

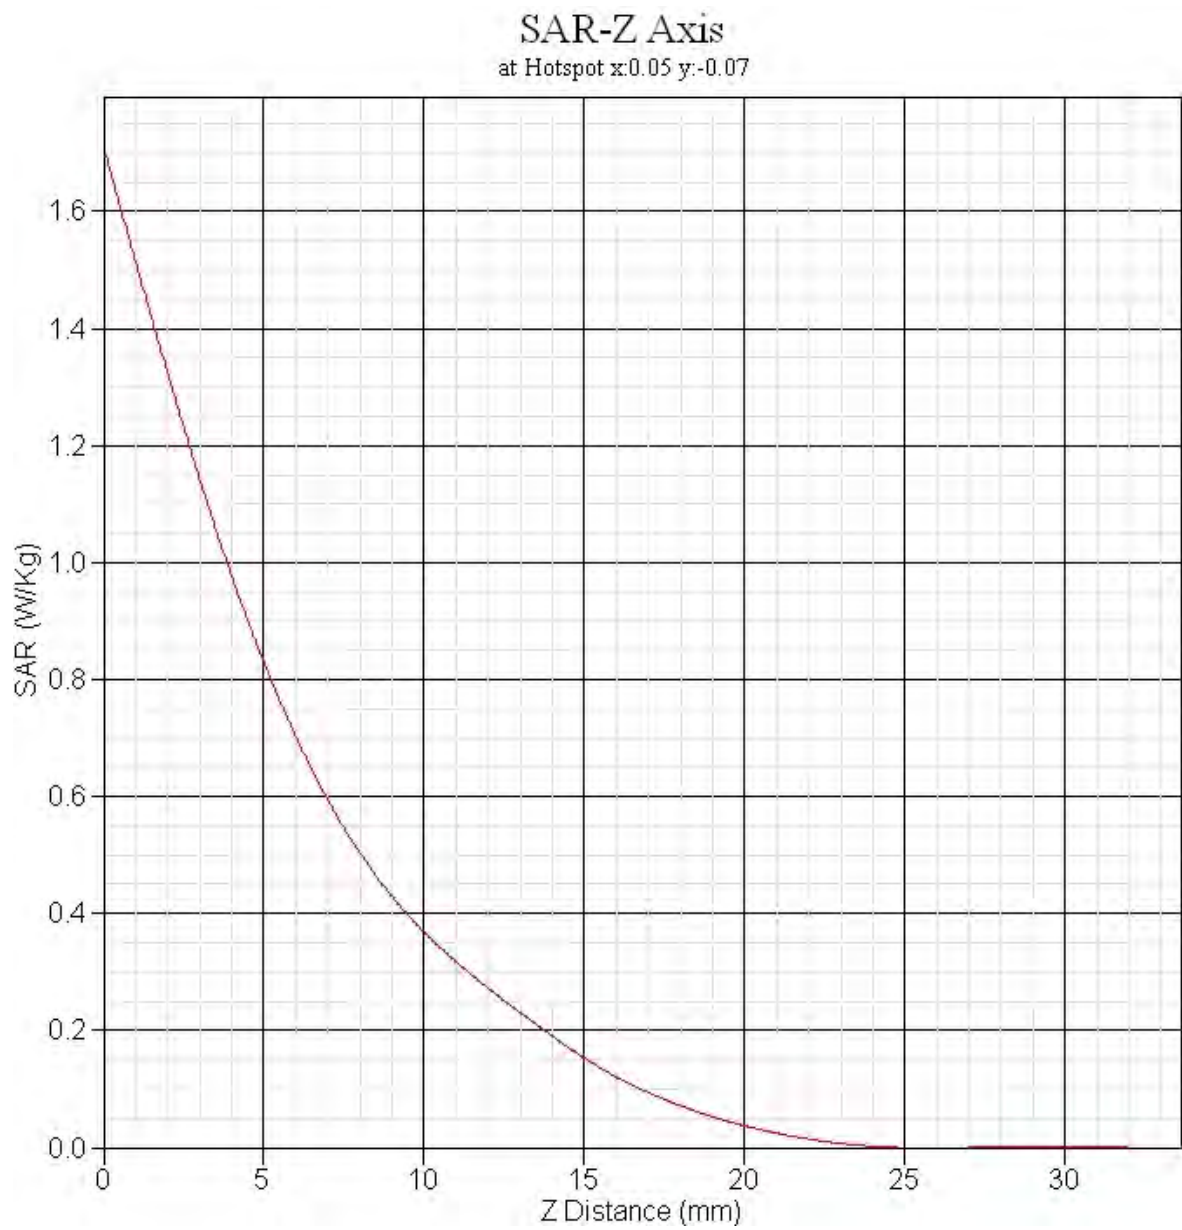

NCL CALIBRATION LABORATORIES

Calibration File No.: PC-1608

Task No: ISL-PC-5784

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the
NCL CALIBRATION LABORATORIES by qualified personnel following recognized
procedures and using transfer standards traceable to NRC/NIST.

Equipment: Miniature Isotropic RF Probe

Record of Calibration

Body

Manufacturer: APREL Laboratories

Model No.: E-020

Serial No.: 266

Calibration Procedure: D01-032-E020-V2, D22-012-Tissue, D28-002-Dipole

Project No: BACL-5784

Calibrated: 12th January 2015

Released on: 15th January 2015

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By:



Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

Suite 102, 303 Terry Fox Dr,
OTTAWA, ONTARIO
CANADA K2K 3J1

Division of APREL Lab.
TEL: (613) 435-8300
FAX: (613) 435-8306

Introduction

This Calibration Report reproduces the results of the calibration performed in line with the references listed below. Calibration is performed using accepted methodologies as per the references listed below. Probes are calibrated for air, and tissue and the values reported are the results from the physical quantification of the probe through meteorological practices.

Calibration Method

Probes are calibrated using the following methods.

<800 MHz

TEM Cell for sensitivity in air

Standard phantom using temperature transfer method for sensitivity in tissue

>800 MHz

Waveguide* method to determine sensitivity in air and tissue

*Waveguide is numerically (simulation) assessed to determine the field distribution and power

The boundary effect for the probe is assessed using a standard flat phantom where the probe output is compared against a numerically simulated series of data points

References

- o IEEE Standard 1528:2013
IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
- o EN 62209-1:2006
Human Exposure to RF Fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to measure the Specific Absorption Rate (SAR) for hand-held mobile wireless devices
- o IEC 62209-2:2010
Human exposure to RF fields from hand-held and body-mounted wireless devices - Human models, instrumentation, and procedures - Part 2: specific absorption rate (SAR) for wireless communication devices (30 MHz - 6 GHz)
- o TP-D01-032-E020-V2 E-Field probe calibration procedure
- o D22-012-Tissue dielectric tissue calibration procedure
- o D28-002-Dipole procedure for validation of SAR system using a dipole
- o IEEE 1309 Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz

NCL Calibration Laboratories

Division of APREL Inc.

Conditions

Probe SN 266 was a recalibration.

Ambient Temperature of the Laboratory: 22 °C +/- 1.5°C
Temperature of the Tissue: 21 °C +/- 1.5°C
Relative Humidity: < 60%

Primary Measurement Standards

Instrument	Serial Number	Cal due date
Tektronix USB Power Meter	11C940	May 14, 2015
Agilent Signal Generator	MY45094463	Dec, 2015

Secondary Measurement Standards

Network Analyzer Anritsu 37347C	002106	Feb. 20, 2015
---------------------------------	--------	---------------

Attestation

The below named signatories have conducted the calibration and review of the data which is presented in this calibration report.

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.



Art Brennan, Quality Manager



Dan Brooks, Test Engineer

Probe Summary

Probe Type:	E-Field Probe E020
Serial Number:	266
Frequency:	As presented on page 5
Sensor Offset:	1.56
Sensor Length:	2.5
Tip Enclosure:	Composite*
Tip Diameter:	< 2.9 mm
Tip Length:	55 mm
Total Length:	289 mm

*Resistive to recommended tissue recipes per IEEE-1528

Sensitivity in Air

Channel X:	$1.2 \mu\text{V}/(\text{V}/\text{m})^2$
Channel Y:	$1.2 \mu\text{V}/(\text{V}/\text{m})^2$
Channel Z:	$1.2 \mu\text{V}/(\text{V}/\text{m})^2$
Diode Compression Point:	95 mV

NCL Calibration Laboratories

Division of APREL Inc.

Calibration for Tissue (Head H, Body B)

Frequency	Tissue Type	Measured Epsilon	Measured Sigma	Standard Uncertainty (%)	Calibration Frequency Range (MHz)	Conversion Factor
450 H	Head	X	X	X	X	X
450 B	Body	X	X	X	X	X
700 H	Head	X	X	X	X	X
700 B	Body	56.12	0.92	3.5	±50	6.6
835 H	Head	X	X	X	X	X
835 B	Body	55.35	1.00	3.5	±50	6.8
900 H	Head	X	X	X	X	X
900 B	Body	54.99	1.06	3.5	±50	6.7
1450 H	Head	X	X	X	X	X
1450 B	Body	X	X	X	X	X
1500 H	Head	X	X	X	X	X
1500 B	Body	X	X	X	X	X
1640 H	Head	X	X	X	X	X
1640 B	Body	X	X	X	X	X
1750 H	Head					
1750 B	Body	51.51	1.51	3.5	±75	5.6
1800 H	Head	X	X	X	X	X
1800 B	Body	X	X	X	X	X
1900 H	Head	X	X	X	X	X
1900 B	Body	53.35	1.45	3.5	±75	5.4
2000 H	Head	X	X	X	X	X
2000 B	Body	53.07	1.57	3.5	±75	5.4
2100 H	Head	X	X	X	X	X
2100 B	Body	X	X	X	X	X
2300 H	Head	X	X	X	X	X
2300 B	Body	X	X	X	X	X
2450 H	Head	X	X	X	X	X
2450 B	Body	53.26	1.96	3.5	±75	4.9
3000 H	Head	X	X	X	X	X
3000 B	Body	X	X	X	X	X
3600 H	Head	X	X	X	X	X
3600 B	Body	X	X	X	X	X
5250 H	Head	X	X	X	X	X
5250 B	Body	47.54	5.23	3.5	±100	3.3
5600 H	Head	X	X	X	X	X
5600 B	Body	46.49	5.73	3.5	±100	2.9
5800 H	Head	X	X	X	X	X
5800 B	Body	45.99	6.10	3.5	±100	3.4

Boundary Effect:

Uncertainty resulting from the boundary effect is less than 2.1% for the distance between the tip of the probe and the tissue boundary, when less than 0.58mm.

Spatial Resolution:

The spatial resolution uncertainty is less than 1.5% for 4.9mm diameter probe.

The spatial resolution uncertainty is less than 1.0% for 2.5mm diameter probe.


DAQ-PAQ Contribution

To minimize the uncertainty calculation all tissue sensitivity values were calculated using a load impedance of 5 M Ω .



Probe Calibration Uncertainty

Uncertainty component	Tolerance ($\pm$ %)	Probability distribution	Divisor	Standard uncertainty ($\pm$ %)
Incident or forward power	2.5	R	$\sqrt{3}$	1.44
Reflected power	2	R	$\sqrt{3}$	1.15
Liquid conductivity measurement	1	R	$\sqrt{3}$	0.58
Liquid permittivity measurement	1	R	$\sqrt{3}$	0.58
Liquid conductivity deviation	1.5	R	$\sqrt{3}$	0.87
Liquid permittivity deviation	1.5	R	$\sqrt{3}$	0.87
Frequency deviation	2.25	R	$\sqrt{3}$	1.30
Field homogeneity	2.5	R	$\sqrt{3}$	1.44
Field-probe positioning	2.5	R	$\sqrt{3}$	1.44
Field-probe linearity	1.55	R	$\sqrt{3}$	0.89
Combined standard uncertainty		RSS		3.50

Receiving Pattern Air

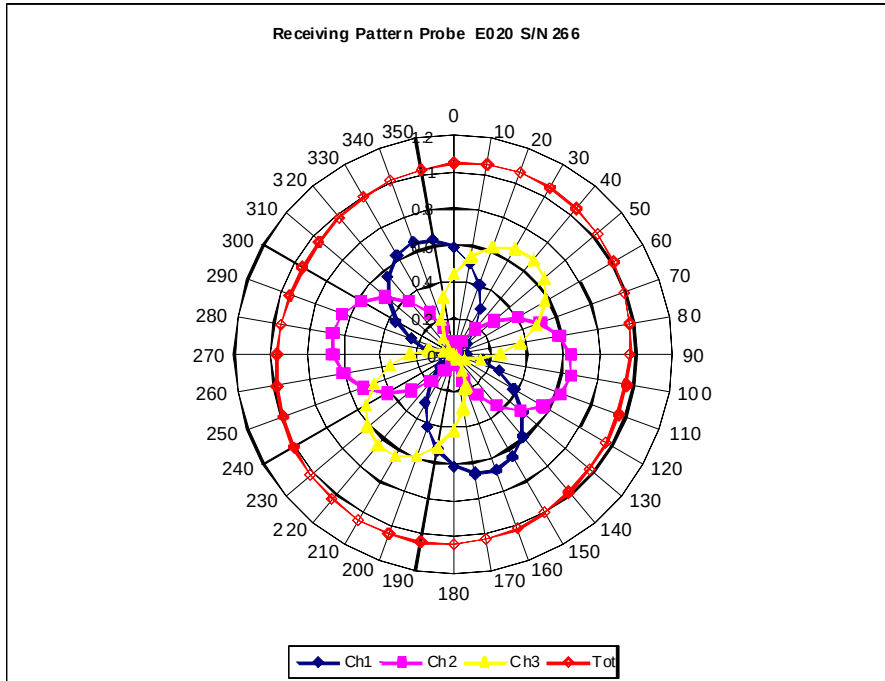


Isotropy Error Air

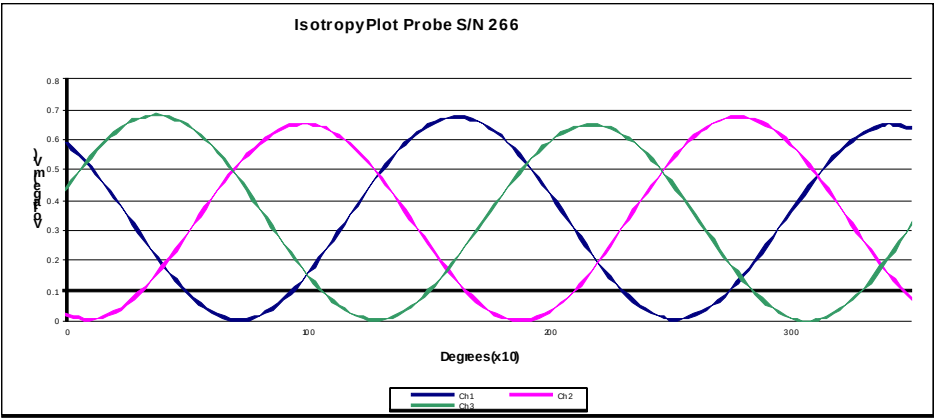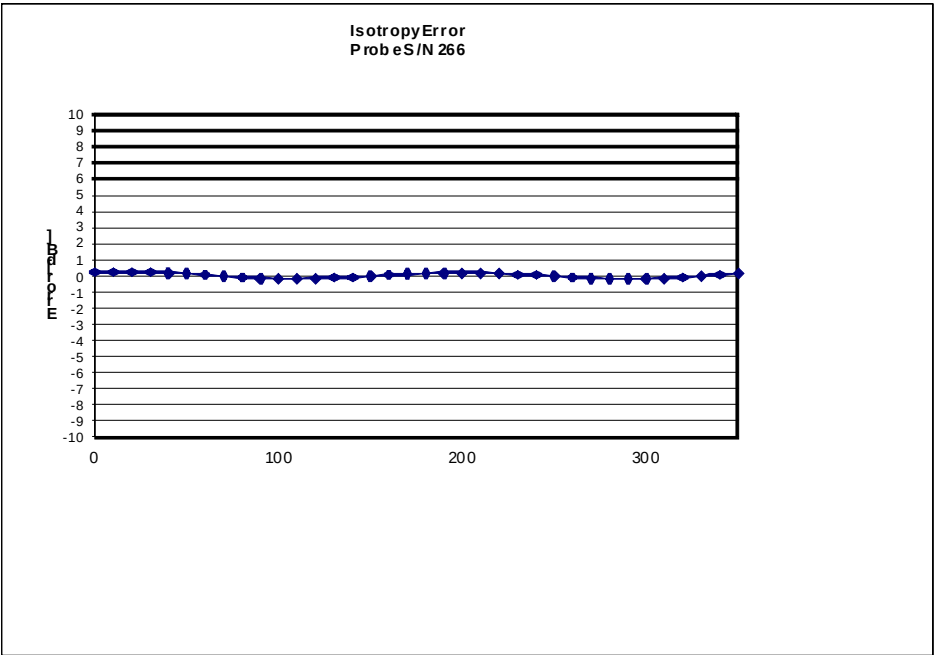


Isotropy Tissue:

0.10 dB

Dynamic Range

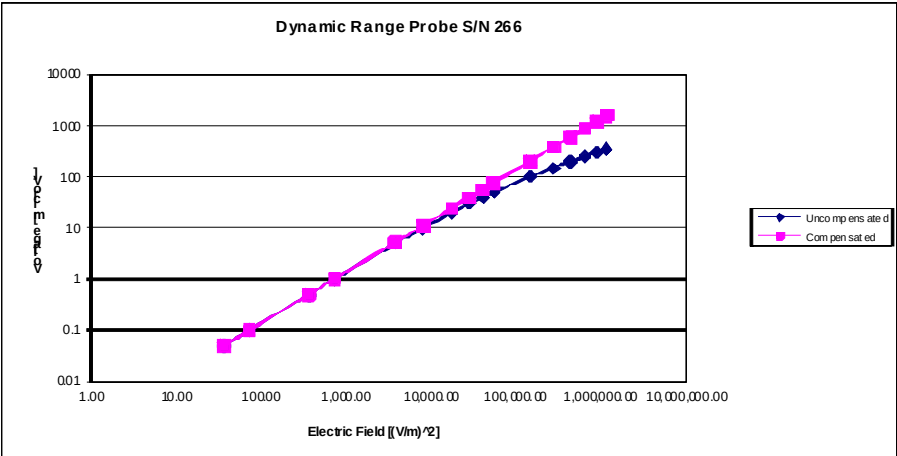

Video Bandwidth

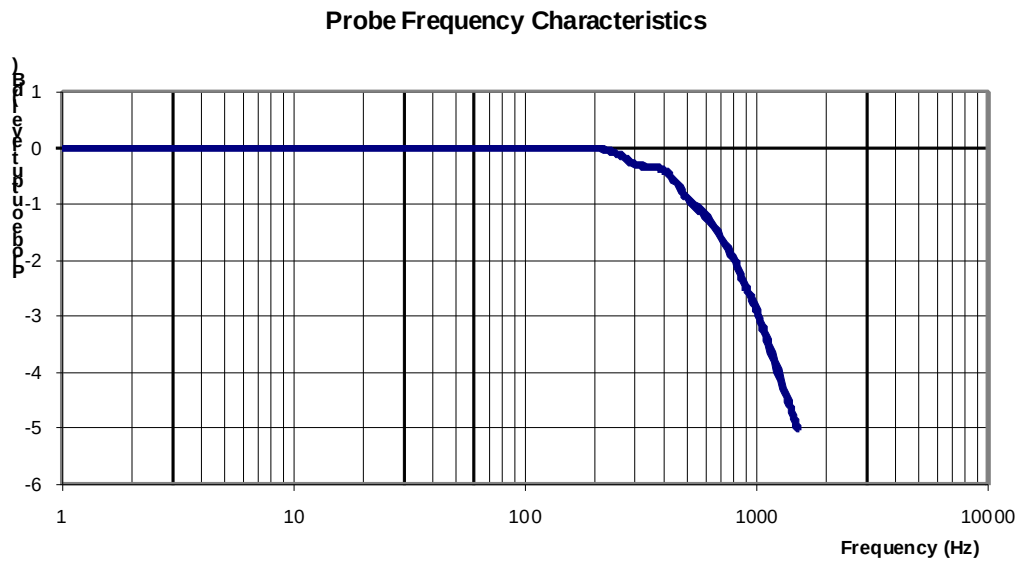

Video Bandwidth at 500 Hz	1 dB
Video Bandwidth at 1.02 KHz:	3 dB

NCL CALIBRATION LABORATORIES

Calibration File No: DC-1613
Project Number: ISL-D-cal-5785

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the
NCL CALIBRATION LABORATORIES by qualified personnel following recognized
procedures and using transfer standards traceable to NRC/NIST.

Validation Dipole (Body)

Manufacturer: APREL Laboratories

Part number: ALS-D-2450-S-2

Frequency: 2450 MHz

Serial No: 220-00753

Customer: ISL

Calibrated: 12th January 2015
Released on: 15th January 2015

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By:



Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

Suite 102, 303 Terry Fox Dr.
Kanata, ONTARIO
CANADA K2K 3J1

Division of APREL Lab.
TEL: (613) 435-8300
FAX: (613) 435-8306

NCL Calibration Laboratories

Division of APREL Laboratories.

Conditions

Dipole 220-00753 was a re-calibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C
Temperature of the Tissue: 21 °C +/- 0.5°C

Attestation

The below named signatories have conducted the calibration and review of the data which is presented in this calibration report.

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.



Art Brennan, Quality Manager



Maryna Nesterova Calibration Engineer

Primary Measurement Standards

Instrument	Serial Number	Cal due date
Tektronix USB Power Meter	11C940	May 14, 2015
Network Analyzer Anritsu 37347C	002106	Feb. 20, 2015
Agilent Signal Generator	MY45094463	Dec. 2015

This page has been reviewed for content and attested to by signature within this document.

Calibration Results Summary

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions

Length	Height
51.5 mm	30.4 mm

Tissue Validation

Tissue	Frequency	Dielectric constant, ϵ_r	Conductivity, σ [S/m]
Body	2450 MHz	53.26	1.96


Electrical Specification

Tissue	Frequency	SWR:	Return Loss	Impedance
Body	2450 MHz	1.03 U	-36.635 dB	49.353 Ω

System Validation Results

Tissue	Frequency	1 Gram	10 Gram
Body	2450 MHz	53.46	24.89

Body

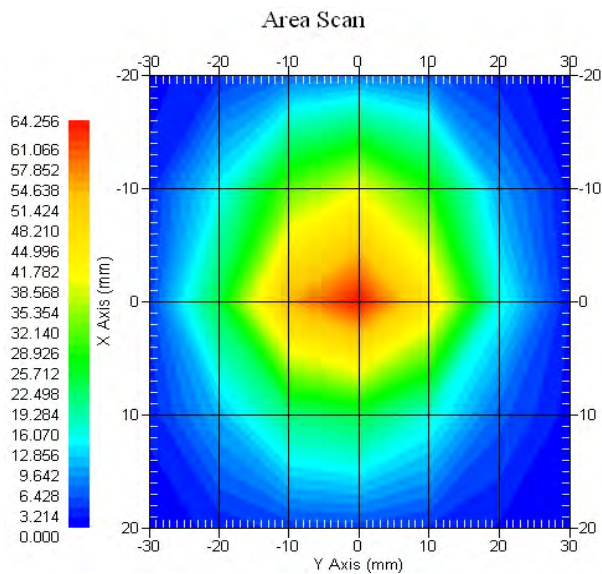

Introduction

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018-ALSAS. The results contained within this report are for Validation Dipole 220-00753. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the mechanical specifications. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALSAS-10U, along with APREL E-020 30 MHz to 6 GHz E-Field Probe Serial Number 266.

References

- o IEEE Standard 1528:2013
IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
- o EN 62209-1:2006
Human Exposure to RF Fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to measure the Specific Absorption Rate (SAR) for hand-held mobile wireless devices
- o IEC 62209-2:2010
Human exposure to RF fields from hand-held and body-mounted wireless devices - Human models, instrumentation, and procedures - Part 2: specific absorption rate (SAR) for wireless communication devices (30 MHz - 6 GHz)
- o D22-012-Tissue dielectric tissue calibration procedure
- o D28-002-Dipole procedure for validation of SAR system using a dipole
- o IEEE 1309 Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz

Conditions

Ambient Temperature of the Laboratory: 21 °C +/- 0.5°C

Temperature of the Tissue: 21 °C +/- 0.5°C

Dipole Calibration uncertainty


The calibration uncertainty for the dipole is made up of various parameters presented below.

Mechanical	1%
Positioning Error	1.22%
Electrical	1.7%
Tissue	2.2%
Dipole Validation	2.2%
Combined Standard Uncertainty	3.88% (7.76% K=2)

The Following Graphs are the results as displayed on the Vector Network Analyzer.

S11 Parameter Return Loss

Body Tissue: Frequency Range 2386.9 MHz to 2513.4 MHz

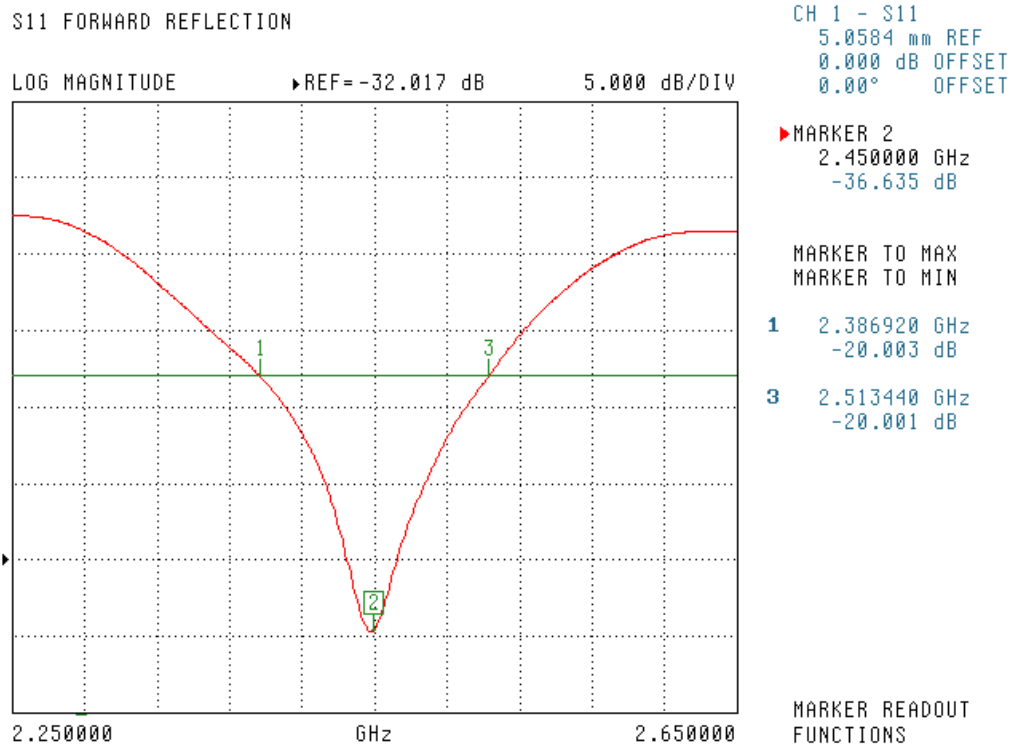


SWR

Body

S11 FORWARD REFLECTION

SWR REF=913.800 mU 200.000 mU/DIV

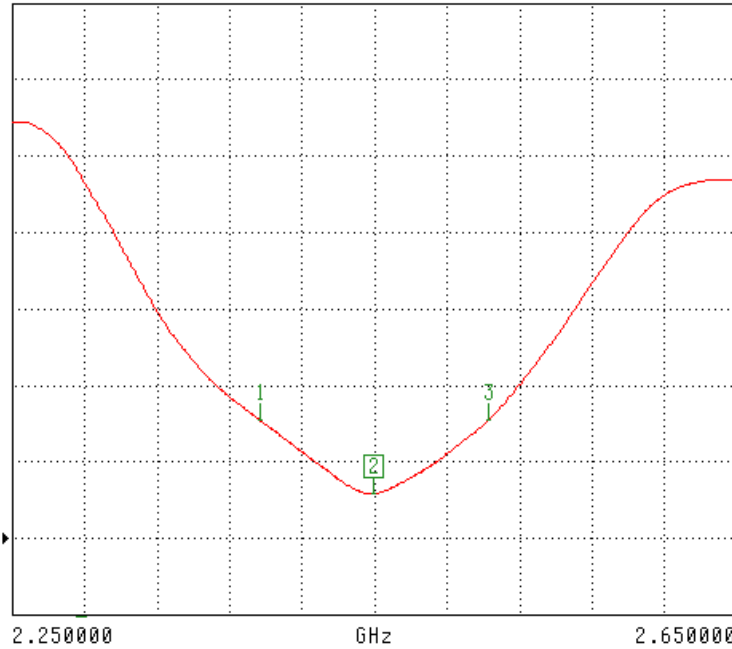

CH 1 - S11
5.0584 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 2
2.450000 GHz
1.030 U

MARKER TO MAX
MARKER TO MIN


1 2.386920 GHz
1.223 U

3 2.513440 GHz
1.223 U

MARKER READOUT
FUNCTIONS

Smith Chart Dipole Impedance

Body

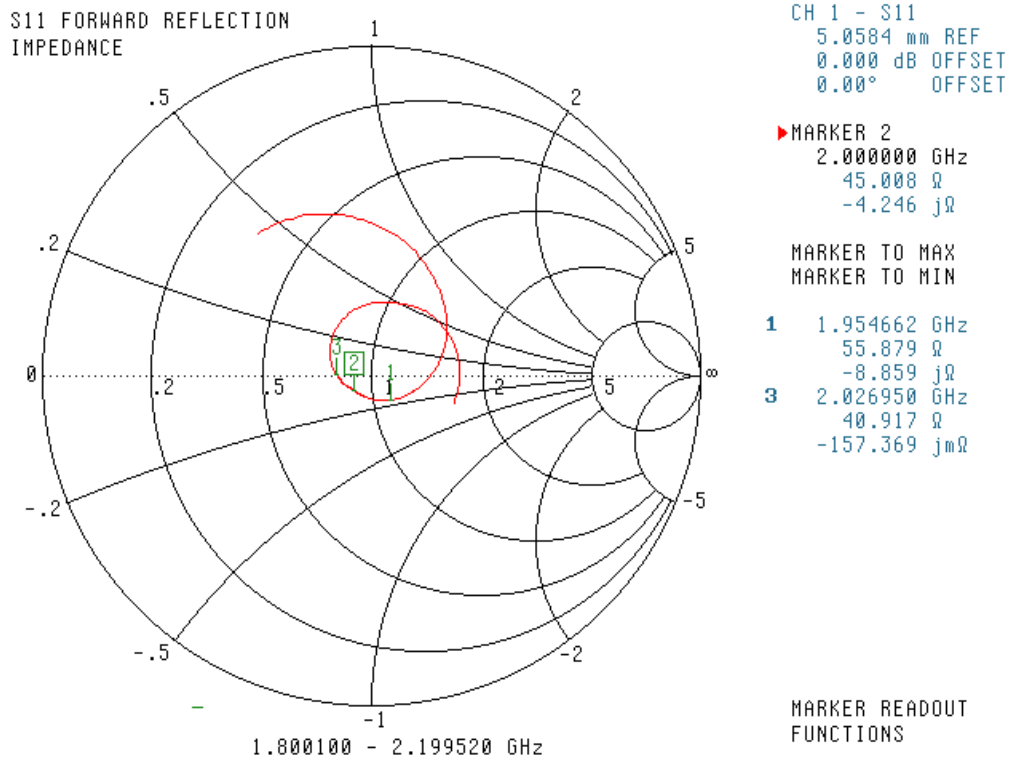

NCL CALIBRATION LABORATORIES

Calibration File No: DC-1614
Project Number: ISL-D-cal-5785

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the
NCL CALIBRATION LABORATORIES by qualified personnel following recognized
procedures and using transfer standards traceable to NRC/NIST.

Validation Dipole (Body)

Manufacturer: APREL Laboratories

Part number: ALS-D-5200-S-2

Frequency: 5250 MHz

Serial No: 230-00802

Customer: ISL

Calibrated: 12th January 2015
Released on: 15th January 2015

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By:



Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

Suite 102, 303 Terry Fox Dr.
Kanata, ONTARIO
CANADA K2K 3J1

Division of APREL Lab.
TEL: (613) 435-8300
FAX: (613) 435-8306

NCL Calibration Laboratories

Division of APREL Laboratories.

Conditions

Dipole 230-00802 was a re-calibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C
Temperature of the Tissue: 21 °C +/- 0.5°C

Attestation

The below named signatories have conducted the calibration and review of the data which is presented in this calibration report.

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.



Art Brennan, Quality Manager



Maryna Nesterova Calibration Engineer

Primary Measurement Standards

Instrument	Serial Number	Cal due date
Tektronix USB Power Meter	11C940	May 14, 2015
Network Analyzer Anritsu 37347C	002106	Feb. 20, 2015
Agilent Signal Generator	MY45094463	Dec. 2015

This page has been reviewed for content and attested to by signature within this document.

Calibration Results Summary

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions

Length	Height
23.6 mm	14.0 mm

Tissue Validation

Tissue	Frequency	Dielectric constant, ϵ_r	Conductivity, σ [S/m]
Body	5250 MHz	47.54	5.23


Electrical Specification

Tissue	Frequency	SWR:	Return Loss	Impedance
Body	5250MHz	1.17 U	-22.4dB	57.834 Ω

System Validation Results

Tissue	Frequency	1 Gram	10 Gram
Body	5250 MHz	63.18	21.24

Body

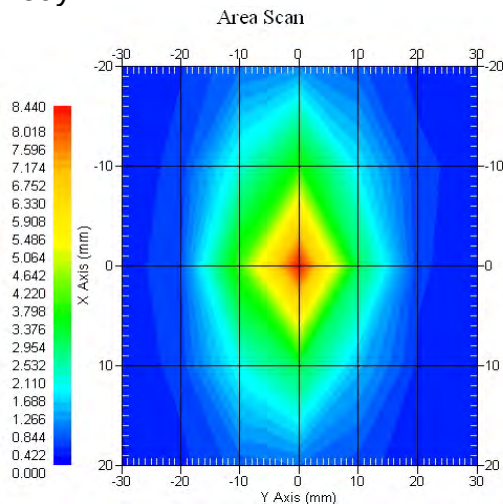

Note: APREL dipoles for SAR measurements above 5 GHz are calibrated referring numerical simulation results (XFDTD method [Remcom Inc.]) for 1 g and 10 g SAR for the configuration of APREL dipoles with Flat and Uni-Phantoms. For the system check procedures a user should use 1 g and 10 g SAR values ($\pm 10\%$) presented in this certificate as a reference.

Introduction

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018-ALSAS. The results contained within this report are for Validation Dipole 230-00802. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the mechanical specifications. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALSAS-10U, along with APREL E-020 30 MHz to 6 GHz E-Field Probe Serial Number 266.

References

- o IEEE Standard 1528:2013
IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
- o EN 62209-1:2006
Human Exposure to RF Fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to measure the Specific Absorption Rate (SAR) for hand-held mobile wireless devices
- o IEC 62209-2:2010
Human exposure to RF fields from hand-held and body-mounted wireless devices - Human models, instrumentation, and procedures - Part 2: specific absorption rate (SAR) for wireless communication devices (30 MHz - 6 GHz)
- o D22-012-Tissue dielectric tissue calibration procedure
- o D28-002-Dipole procedure for validation of SAR system using a dipole
- o IEEE 1309 Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz

Conditions

Ambient Temperature of the Laboratory: 21 °C +/- 0.5°C

Temperature of the Tissue: 21 °C +/- 0.5°C

Dipole Calibration uncertainty


The calibration uncertainty for the dipole is made up of various parameters presented below.

Mechanical	1%
Positioning Error	1.22%
Electrical	1.7%
Tissue	2.2%
Dipole Validation	2.2%
 Combined Standard Uncertainty	 3.88% (7.76% K=2)

The Following Graphs are the results as displayed on the Vector Network Analyzer.

S11 Parameter Return Loss

Body Tissue: Frequency Range 4724.5 MHz to 5284.8 MHz

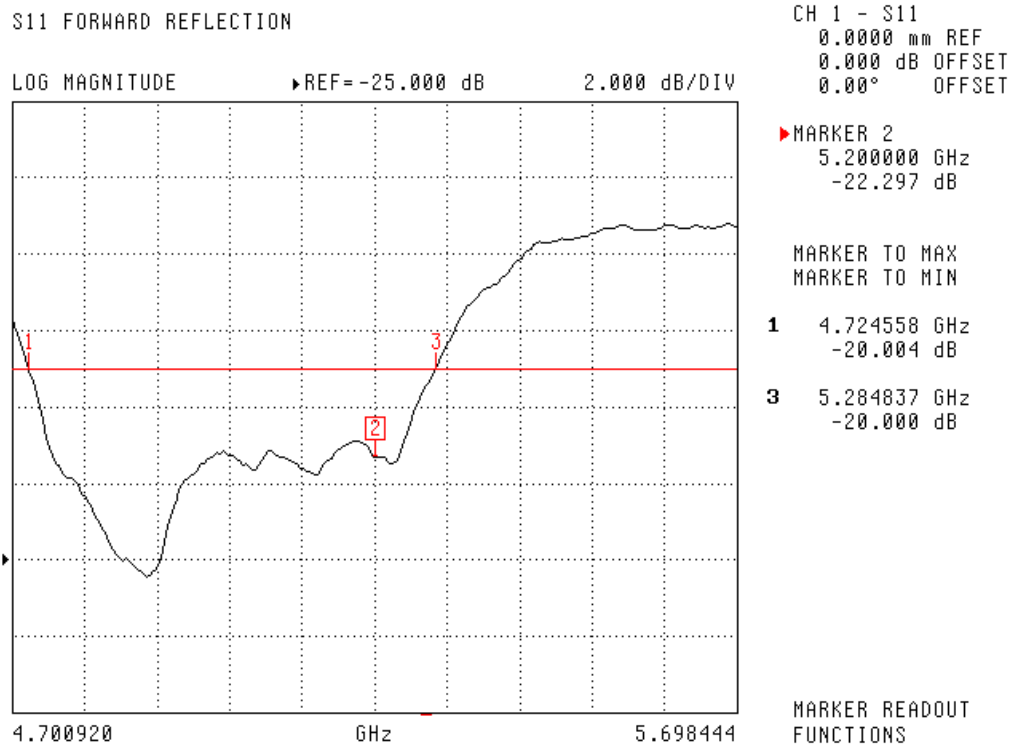

SWR


Body

S11 FORWARD REFLECTION

SWR

REF=1.243 U

50.000 mU/DIV

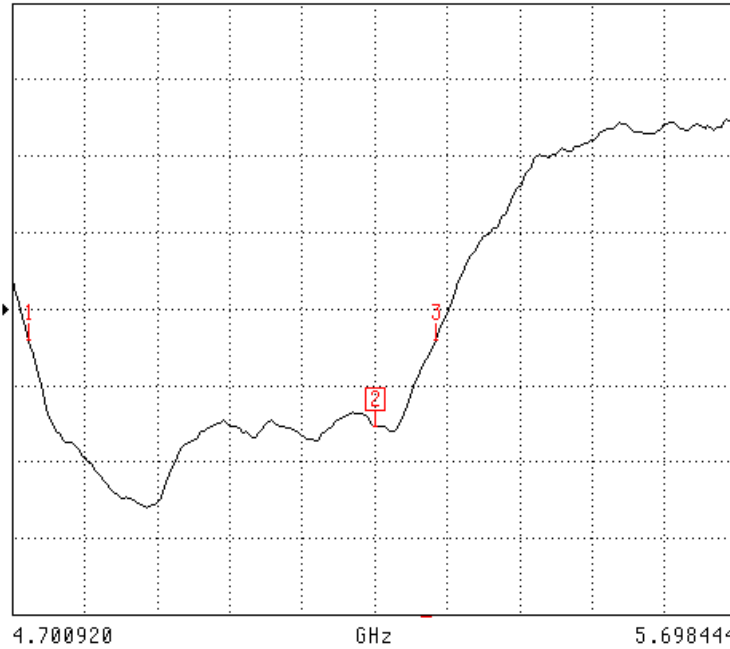

CH 1 - S11
0.0000 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 2
5.200000 GHz
1.166 U

MARKER TO MAX
MARKER TO MIN


1 4.724558 GHz
1.222 U

3 5.284837 GHz
1.222 U

MARKER READOUT
FUNCTIONS

Smith Chart Dipole Impedance

Body

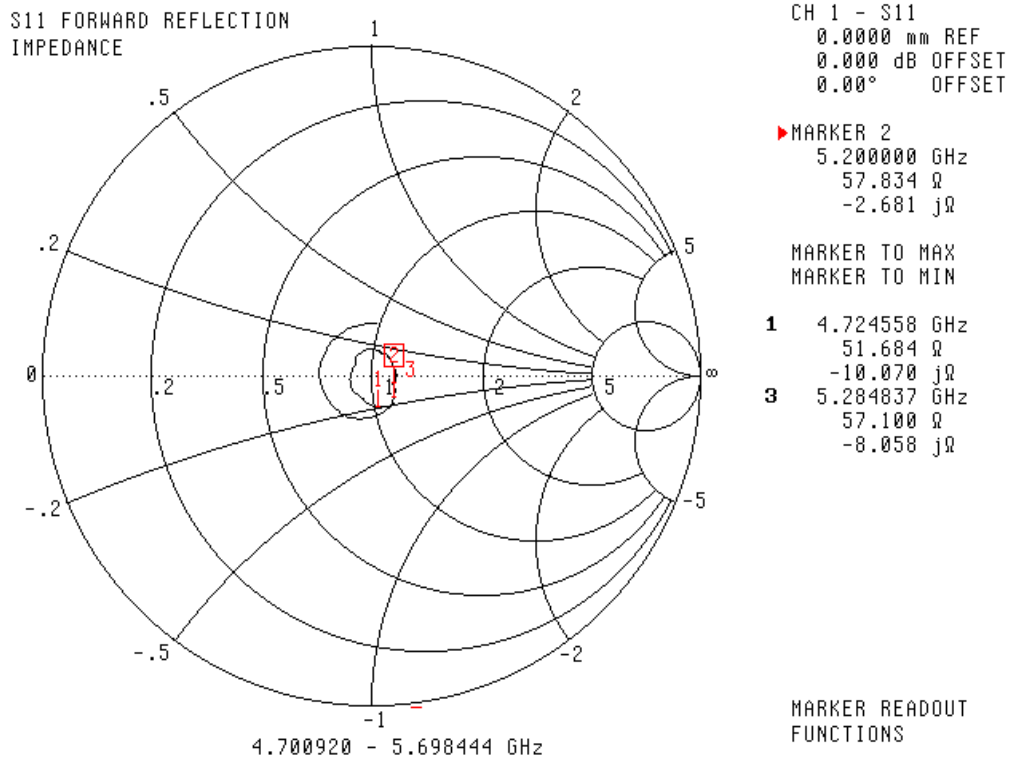

NCL CALIBRATION LABORATORIES

Calibration File No: DC-1616
Project Number: ISL-D-cal-5785

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the
NCL CALIBRATION LABORATORIES by qualified personnel following recognized
procedures and using transfer standards traceable to NRC/NIST.

Validation Dipole (Body)

Manufacturer: APREL Laboratories

Part number: ALS-D-5800-S-2

Frequency: 5800 MHz

Serial No: 240-00852

Customer: ISL

Calibrated: 12th January 2015
Released on: 15th January 2015

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By:



Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

Suite 102, 303 Terry Fox Dr.
Kanata, ONTARIO
CANADA K2K 3J1

Division of APREL Lab.
TEL: (613) 435-8300
FAX: (613) 435-8306

NCL Calibration Laboratories

Division of APREL Laboratories.

Conditions

Dipole 240-00852 was a re-calibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C
Temperature of the Tissue: 21 °C +/- 0.5°C

Attestation

The below named signatories have conducted the calibration and review of the data which is presented in this calibration report.

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.



Art Brennan, Quality Manager



Maryna Nesterova Calibration Engineer

Primary Measurement Standards

Instrument	Serial Number	Cal due date
Tektronix USB Power Meter	11C940	May 14, 2015
Network Analyzer Anritsu 37347C	002106	Feb. 20, 2015
Agilent Signal Generator	MY45094463	Dec. 2015

This page has been reviewed for content and attested to by signature within this document.

Calibration Results Summary

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions

Length	Height
21.6 mm	14.7 mm

Tissue Validation

Tissue	Frequency	Dielectric constant, ϵ_r	Conductivity, σ [S/m]
Body	5800 MHz	45.99	6.10


Electrical Specification

Tissue	Frequency	SWR:	Return Loss	Impedance
Body	5800 MHz	1.407 U	-15.438 dB	62.919 Ω

System Validation Results

Tissue	Frequency	1 Gram	10 Gram
Body	5800 MHz	59.95	18.61

Body

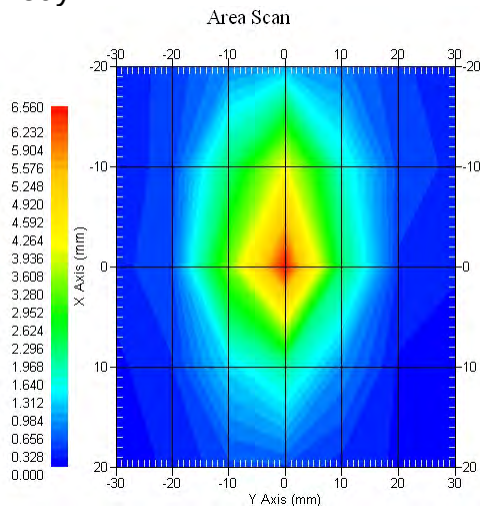

Note: APREL dipoles for SAR measurements above 5 GHz are calibrated referring numerical simulation results (XFDTD method [Remcom Inc.]) for 1 g and 10 g SAR for the configuration of APREL dipoles with Flat and Uni-Phantoms. For the system check procedures a user should use 1 g and 10 g SAR values ($\pm 10\%$) presented in this certificate as a reference.

Introduction

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018-ALSAS. The results contained within this report are for Validation Dipole 240-00852. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the mechanical specifications. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALSAS-10U, along with APREL E-020 30 MHz to 6 GHz E-Field Probe Serial Number 266.

References

- o IEEE Standard 1528:2013
IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
- o EN 62209-1:2006
Human Exposure to RF Fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to measure the Specific Absorption Rate (SAR) for hand-held mobile wireless devices
- o IEC 62209-2:2010
Human exposure to RF fields from hand-held and body-mounted wireless devices - Human models, instrumentation, and procedures - Part 2: specific absorption rate (SAR) for wireless communication devices (30 MHz - 6 GHz)
- o D22-012-Tissue dielectric tissue calibration procedure
- o D28-002-Dipole procedure for validation of SAR system using a dipole
- o IEEE 1309 Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz

Conditions

Ambient Temperature of the Laboratory: 21 °C +/- 0.5°C

Temperature of the Tissue: 21 °C +/- 0.5°C

Dipole Calibration uncertainty


The calibration uncertainty for the dipole is made up of various parameters presented below.

Mechanical	1%
Positioning Error	1.22%
Electrical	1.7%
Tissue	2.2%
Dipole Validation	2.2%
Combined Standard Uncertainty	3.88% (7.76% K=2)

The Following Graphs are the results as displayed on the Vector Network Analyzer.

S11 Parameter Return Loss

Body Tissue:

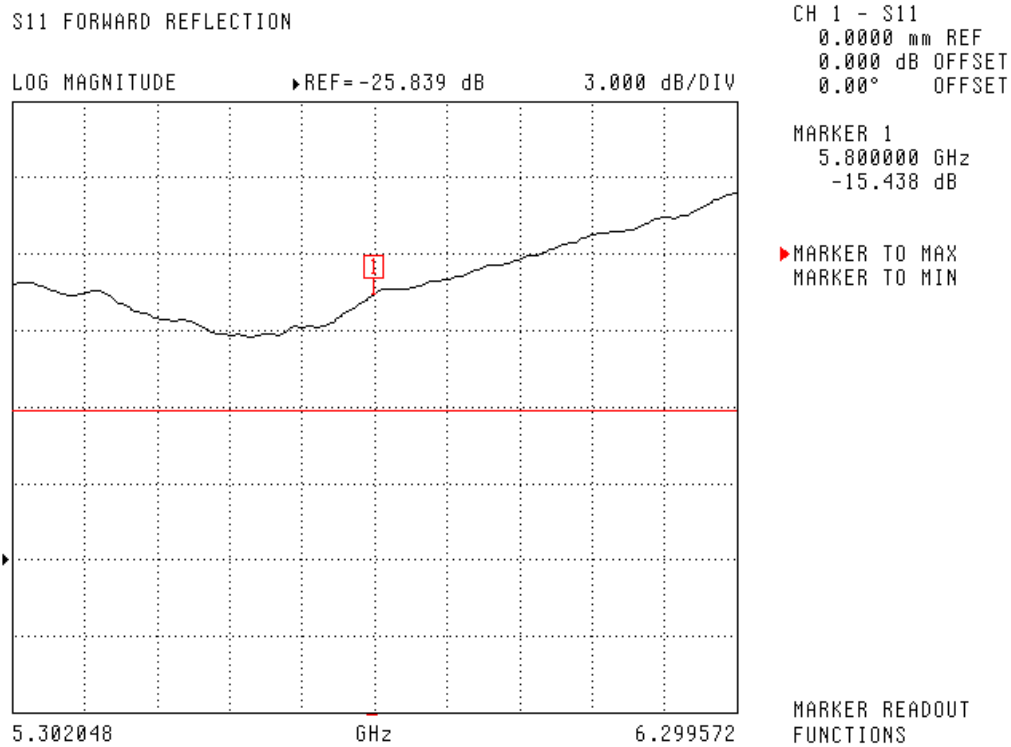

SWR


Body

S11 FORWARD REFLECTION

SWR

REF=1.735 U

200.000 mU/DIV

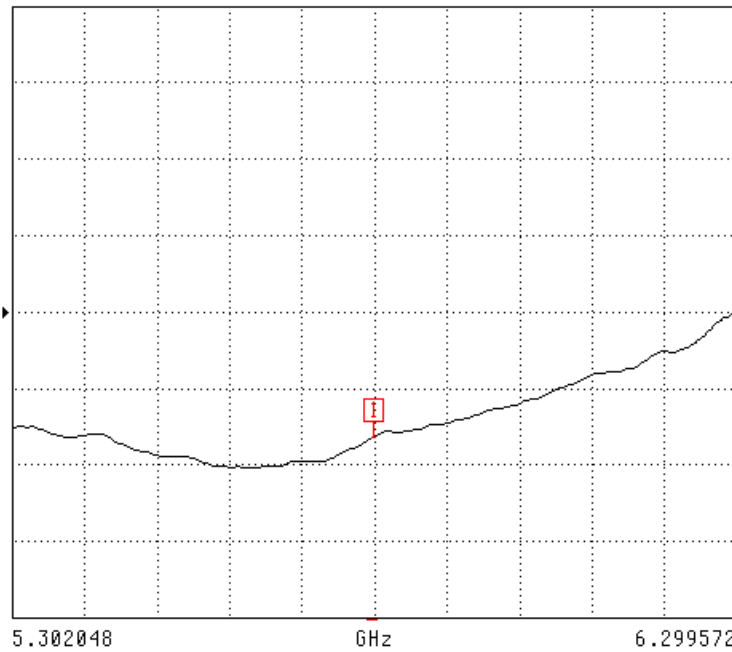

CH 1 - S11
0.0000 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 1
5.800000 GHz
1.407 U


MARKER TO MAX
MARKER TO MIN

MARKER READOUT
FUNCTIONS

Smith Chart Dipole Impedance

Body

S11 FORWARD REFLECTION
IMPEDANCE

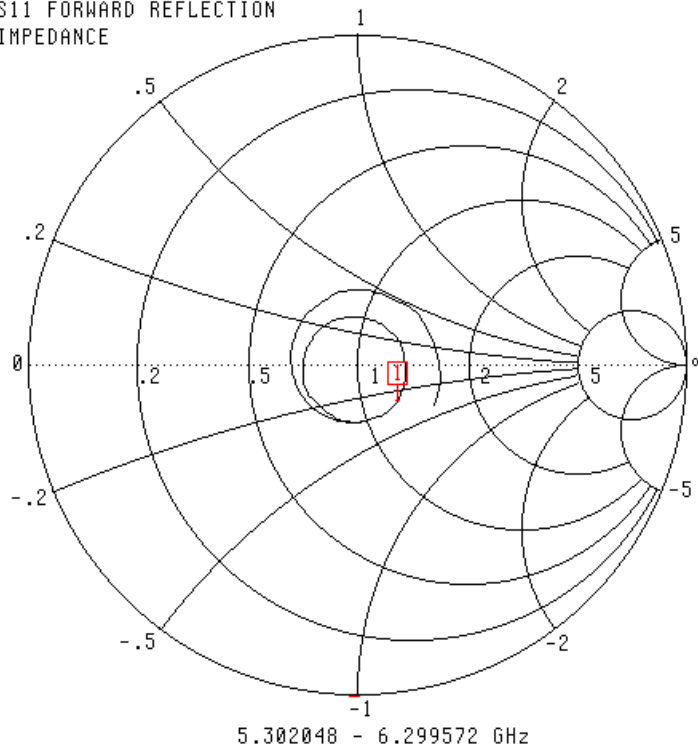

CH 1 - S11
0.0000 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 1
5.800000 GHz
62.919 Ω
-14.234 $j\Omega$

▶ MARKER TO MAX
MARKER TO MIN

MARKER READOUT
FUNCTIONS