



PEP Testing Laboratory

RFI / EMI TEST REPORT

APPLICANT : CNF, INC.

E. U. T. : DVD-ROM DRIVE

TRADE NAME : N/A

FCC ID : I5C0001

REGULATION : CFR 47, Part 15 Subpart B, Class B

TEST SITE : PEP Testing Laboratory

TEST ENGINEER : *Wen Gong*

TEST DATE : *4 / 13 / 1998*

ISSUED DATE : APR. / 20 / 1998

REPORT No. : 980189

FEDERAL COMMUNICATIONS COMMISSION

7435 Oakland Mills Road
Columbia, MD 21046
Telephone: 301-725-1585 (ext-218)
Facsimile: 301-344-2050

November 25, 1996

IN REPLY REFER TO
31040/SIT
1300F2

PEP Testing Laboratory
12-3 Fl., No. 27-1, Lane 169
Kang-Ning St., Hsi-chi Town
Taipei Hsien, Taiwan, R.O.C.

Attention: M. Y. Tsui


Re: Measurement facility located at above address
(3 meter site)

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for certification or notification under Parts 15 or 18 of the Commission's Rules. Our list will also indicate that the facility complies with the radiated and AC line conducted test site criteria in ANSI C63.4-1992. Please note that this filing must be updated for any changes made to the facility, and at least every three years the data on file must be certified as current.

Per your request, the above mentioned facility has been also added to our list of those who perform these measurement services for the public on a fee basis. This list is published periodically and is also available on the Laboratory's Public Access Link as described in the enclosed Public Notice.

Sincerely,



Thomas W. Phillips
Electronics Engineer
Customer Service Branch

Enclosure:
PAL PN



PEP Testing Laboratory

VERIFICATION

WE HEREBY VERIFY THAT:

The E. U. T. listed below has completed RFI testing by PEP Testing Laboratory and the interference emissions can pass **FCC Class B** limitations.

The tested configurations and the facility complies with the radiated and AC line conducted test site criteria in ANSI C63.4 - 1992.

Any data in this RFI report is "reference" only.

APPLICANT : CNF, INC.*

PRODUCT : DVD-ROM DRIVE*

FCC ID : I5C0001*

MODEL : CARDPORT DVD*



M. Y. Tsui

M. Y. TSUI

Manager

PEP Testing Laboratory

12-3FL., NO. 27-1, Lane 169, Kang-Ning St.,
Hsi-Chi, Taipei Hsien, Taiwan, R. O. C.
TEL : 886-2-6922097 FAX : 886-2-6956236



PEP Testing Laboratory

TABLE OF CONTENTS

1. GENERAL

1.1 General Information	1
1.2 Place of Measurement	1
1.3 Labeling Requirements	2
1.4 Information to User	3

2. CONDUCTED EMISSIONS TEST

2.1 Setup of the Test Facilities	4
2.2 Test Procedures	5

3. RADIATED EMISSIONS TEST

3.1 Setup of the Test Facilities	6
3.2 Test Procedures	7

4. DESCRIPTION FOR EUT TESTING CINEFIGURATION

8

5. SUPPORTING DEVICES TO TEST

9

6. TEST CONFIGURATION

C

** Conducted Emission Test Photo. and Data

** Radiated Emission Test Photo. and Data

7. APPENDIX

A. Photos of EUT Appearance

10



PEP Testing Laboratory

1. GENERAL

1.1 GENERAL INFORMATION:

APPLICANT : CNF, INC.

15345 CALLE ENRIQUE, MORGAN HILL
CA 95037, U.S.A.

MANUFACTURER : GOLDTECK INTERNATIONAL INC.

8F-1, NO. 103, NAN CHANG RD.,
SEC. 2, TAIPEI TAIWAN R.O.C.

MEASUREMENT PROCEDURE : ANSI C63,4 - 1992

TESTED FOR COMPLIANCE WITH : Title 47 of CFR
Part 15, Subpart B, Class B


1.2 PLACE OF MEASUREMENT PEP Testing Laboratory



PEP Testing Laboratory

1.3 LABELING REQUIREMENT

A FCC ID label shall be permanently attached and conspicuously located on the equipment:

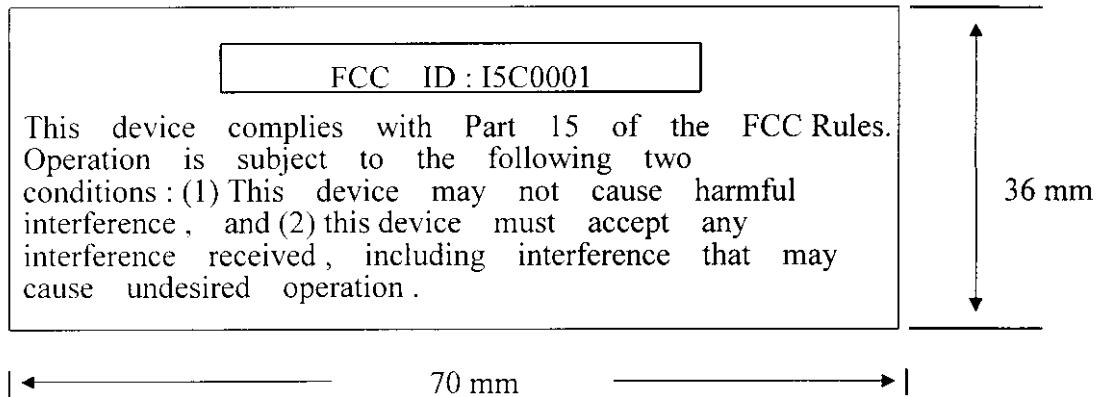



PEP Testing Laboratory

1.4 INFORMATION TO THE USER

The following FCC statement should be declared in a conspicuous location in the user's manual.

Federal Communications Commission (FCC) Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

Warning : A shielded-type power cord is required in order to meet FCC emission limits and also to prevent interference to the nearby radio and television reception. It is essential that only the supplied power cord be used.

Use only shielded cables to connect I/O devices to this equipment.


You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.



PEP Testing Laboratory

2. CONDUCTION EMISSIONS TEST

2.1 GENERAL SETUP OF THE TEST FACILITIES

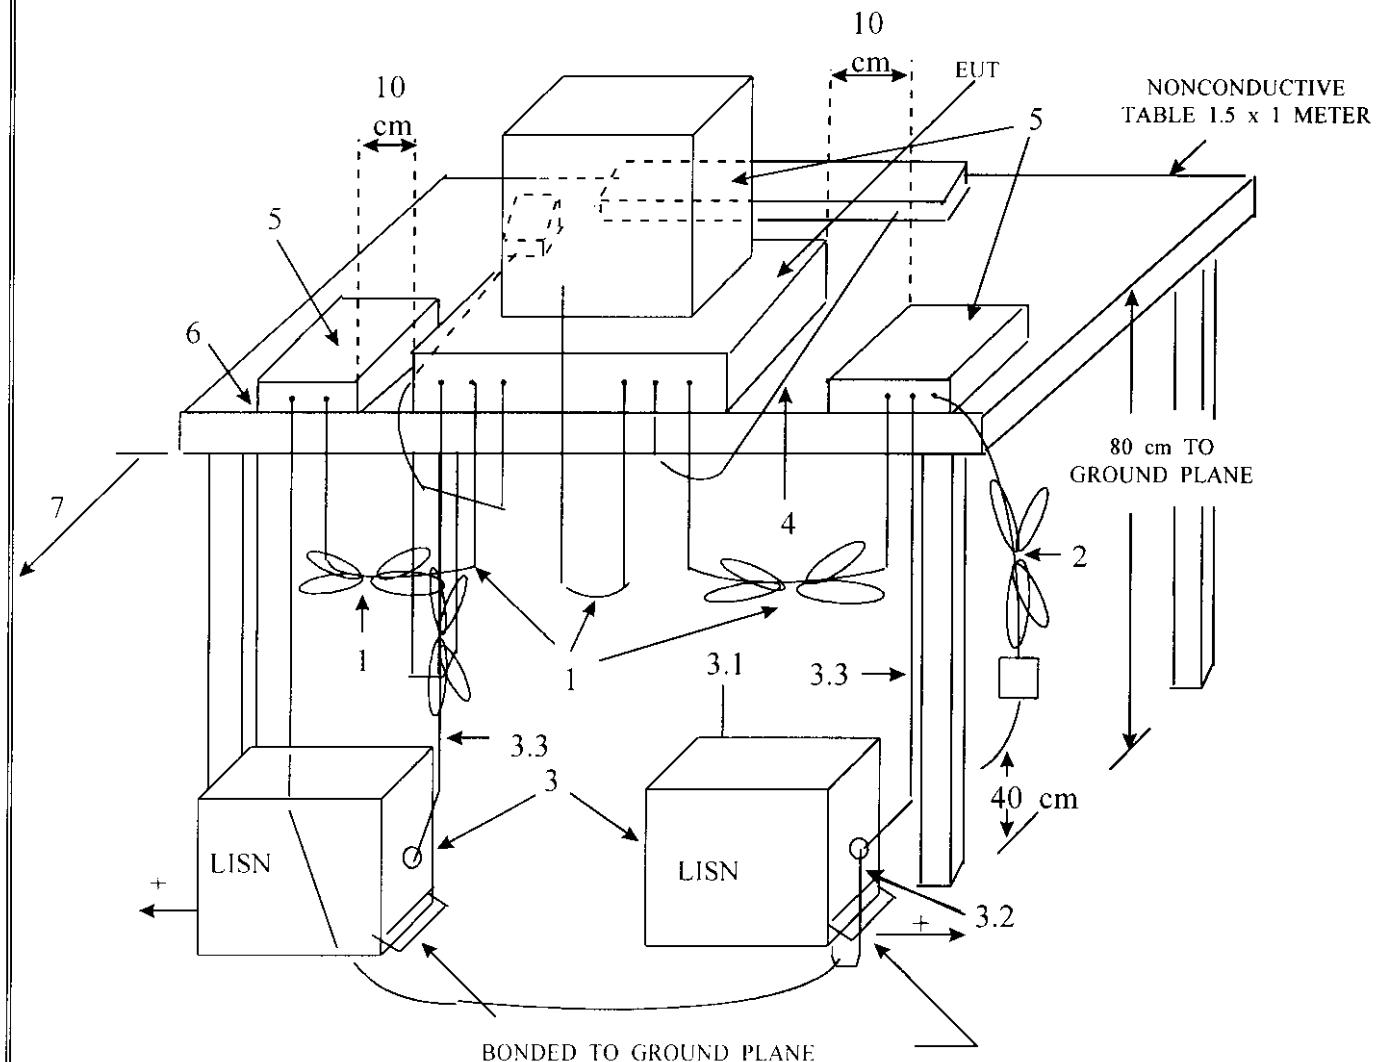

LEGEND

1. Interconnecting cables which hang closer than 40 cm to the ground plane shall be folded back and forth forming a bundle 30 to 40 cm long hanging approximately in the middle between ground plane and table.
2. I/O cables which are connected to a peripheral shall be bundled in center. The end of the cable may be terminated if required using correct terminating impedance. The total length shall not exceed 1 m.
3. EUT connected to one LISN. Unused LISN connectors shall be terminated in 50 ohms. LISN can be placed on top of, or immediately beneath ground plane.
- 3.1 All other equipment powered from second LISN.
- 3.2 Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- 3.3 LISN at least 80 cm from nearest part of EUT chassis.
4. Cables of hand-operated devices, such as keyboards, mouses, etc., have to be placed as close as possible to the host.
5. Non-EUT components being tested.
6. Rear of EUT including peripherals shall be all aligned and flush with rear of table top.
7. Rear of table top shall be 40 cm removed from a vertical conducting plane which bonded to the floor ground plane (see 5.2)



PEP Testing Laboratory

2.2 TEST PROCEDURES

The system was setup as described above, with the EMI diagnostic software.


Both the line of power cord, hot and neutral, were run with the EMI tests software.

To get the maximum power line conducted emission, we changed the configuration by varying the monitor power cord fed from floor outlet and from the outlet on the power supply of this computer.

The highest emissions were recorded in the RFI test report.

3. RADIATED EMISSIONS TEST

3.1 GENERAL SETUP OF THE FACILITIES

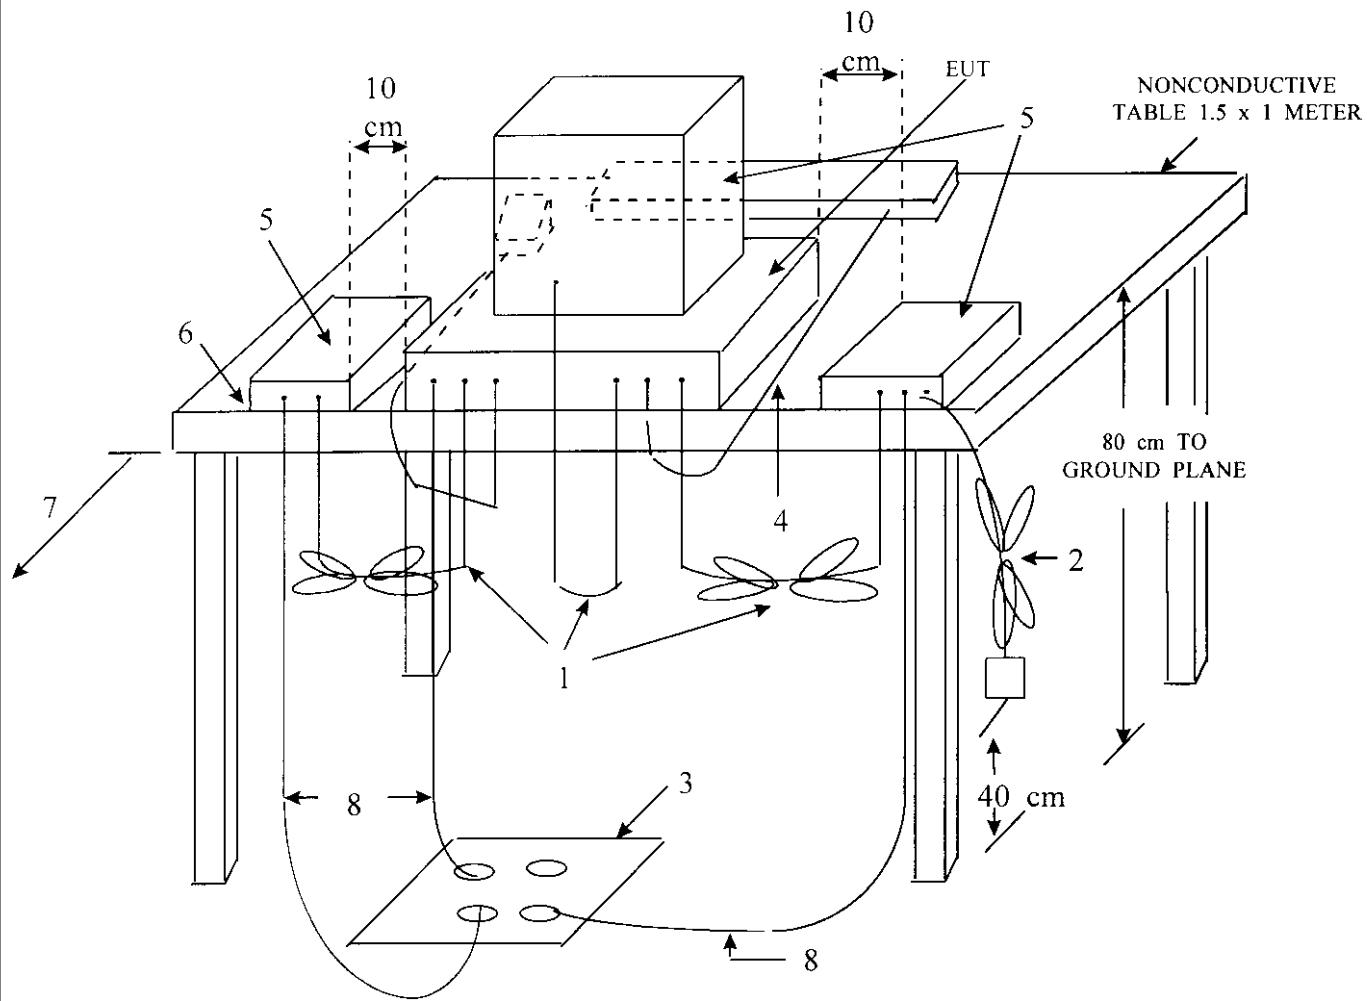

LEGEND

1. Interconnecting cables which hang closer than 40 cm to the ground plane shall be folded back and forth forming a bundle 30 to 40 cm long, hanging approximately in the middle between ground plane and table.
2. I/O cables which are connected to a peripheral shall be bundled in center. The end of the cable may be terminated if required using correct terminating impedance. The total length shall not exceed 1 m.
3. If LISN are kept in the test setup for radiated emissions, it is preferred that they be installed under the ground if required receptacle flush with the ground plane.
4. Cables of hand-operated devices, such as keyboards, mouses, etc., have to be placed as close as possible to the controller.
5. Non-EUT components of EUT system being tested.
6. The rear of all components of the system under test shall be located flush with the rear of the table.
7. No vertical conducting wall used.
8. Power cords drape to the floor and are routed over to receptacle.



PEP Testing Laboratory

3.2 TEST PROCEDURES

Radiated emissions test was carried out by **PEP Testing Laboratory** at the open field test site authorized by FCC.

The EUT and supporting equipments were setup with the EMI diagnostic software .

- a. setting up the EUT under normally position , and scanning it from 30 MHz to 1000 MHz , then recording those narrow band noises which cannot be 6 dBuV below lower bound . Both horizontal and vertical antenna are measured from 1 meter height to 4.0 meter height , and turntable rotate 360 degrees .
- b. fixing the EUT rear face to antenna and antenna 1.0 meter height . We adjusted I/O cables to find the highest coupling noise and moved the height of antenna from 1 to 4 meters , then rotated the turntable simultaneously .
- c. checking following step b. all points which were recorded in step a.
- d. changing the peripherals position , and routine steps a. b. c.

The highest emissions were recorded in the RFI test report .



PEP Testing Laboratory

4. DESCRIPTION FOR EUT TESTING CONFIGURATION

**** TEST PROCESURE ----**

- (A) The EUT was PCMCIA SLIM DVD-ROM driver for notebook computer used , for more detail information about the EUT , please refer user's manual .
- (B) When EUT was tested , the PC system was under DOS situation , EUT read data from HDD and wrote data to HDD , this loop back action will be kept during test . Because of simulation the EUT the worst case situation , we made EUT enable all the testing time and the rest of peripheral devices were under stand by condition .
- (C) After the EUT was setup , we did the conducted emission test in the shielded room and the worst case placement finding as the ANSI C63.4 requirement ; similarly , the radiated emission test was done at the open field site .
- (D) If the peak value of the noise can't under Non-consumer equipment limit 3 dBuV more , we'll change Biconical antenna or Log-periodic antenna for Dipole antenna and record its Quasi-Peak value , making sure it can under 6 dBuV at least .
- (E) In the RFI test report , we provided the worst conducted emission testing data in page C-1.*
For the radiated emission test , the worst data recorded in the page R-1.*

**** I/O DATA CABLES INFORMATIONS ---**

Please refer the page 9 .



PEP Testing Laboratory

5. SUPPORTING DEVICES TO TEST

SUPPORT UNIT 1. ---- NOTEBOOK

Manufacturer : IBM
Model Number : THINK PAD 560X
Power Supply Type : N/A
Power Cord : N/A
Data Cable : N/A
FCC ID : N/A

SUPPORT UNIT 2. ---- MONITOR

Manufacturer : Acer
Model Number : 7134
Power Supply Type : Switching
Power Cord : Shielded
Data Cable : Shielded
FCC ID : JVP7134T

SUPPORT UNIT 3. ---- PRINTER

Manufacturer : Hewlett-Packard Singapore Pte Ltd.
Model Number : HP 2225C
Power Supply Type : Linear
Power Cord : Non-Shielded, Detachable
Data Cable : Shielded, Detachable, 1.2m.2464
FCC ID : DSI6XU2225



PEP Testing Laboratory

SUPPORT UNIT 4. ---- MODEM

Manufacturer : ACEEX
Model Number : 1414
Power Supply Type : Linear
Power Cord : Non-Shielded, Detachable
Data Cable : Shielded
FCC ID : IFAXDM1414

SUPPORT UNIT 5. ---- MOUSE

Manufacturer : Acer Peripherals Inc.
Model Number : M-S34
Power Supply Type : N/A
Power Cord : N/A
Data Cable : Shielded
FCC ID : DZL211029

SUPPORT UNIT 6. ---- EARPHONE

Manufacturer : Professional Co. Ltd.
Model Number : PH-200
Power Supply Type : N/A
Power Cord : N/A
Data Cable : Non-Shielded, Undetachable
FCC ID : N/A



PEP Testing Laboratory

SUPPORT UNIT 7. ---- Micro-Phone

Manufacturer : Professional Co., Ltd.
Model Number : MUD 5155
Power Supply Type : N/A
Power Cord : N/A
Data Cable : Non-Shielded, Undetachable
FCC ID : N/A

SUPPORT UNIT 8. ---- Speaker

Manufacturer : Acer Inc.
Model Number : B-611
Power Supply Type : N/A
Power Cord : N/A
Data Cable : Non-Shielded , Undetachable, 1.2m
FCC ID : N/A

EQUIPMENT UNDER TEST ---- DVD-ROM DRIVE

Manufacturer : CNF, INC.
Model Number : CARDPORT DVD
Data Cable : Shielded
FCC ID : 15C0001



Product Warranties and Notices

Electronic Emission Notice

Federal Communications Commission (FCC) Statement

ThinkPad 560X, 2640

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult an IBM authorized dealer or service representative for help.

Properly shielded and grounded cables and connectors must be used in order to meet FCC emission limits. Proper cables and connectors are available from IBM authorized dealers. IBM is not responsible for any radio or television interference caused by unauthorized changes or modifications to this equipment. Unauthorized changes or modifications could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Responsible Party:

International Business Machines Corporation
Old Orchard Road
Armonk, NY 10504
Telephone 1-919-543-2193



PEP Testing Laboratory

6. TEST CONFIGURATION

Radiated emission detector function :

(1) 30MHZ~1GHZ : Quasi-Peak Value
Resolution BW : 120KHZ Video BW : 300KHZ

(2) above 1GHZ : Quasi-Peak value and Average Value
Resolution BW : 1MHZ Video BW : 1MHZ
* either Q. P. or average value will be recorded
in the report

Conducted emission detector function :

(1) 450KHZ~30MHZ : Quasi-Peak Value
Resolution BW : 9KHZ Video BW : 30KHZ

The else descriptions : The notebook computer is IBM DOC classB device . model No. THINPAD560X .

The PCMCIA card will be sold along with the EUT .

Conducted Emission Test Photo. : Page C-1

Test Data : Hot C-1.1
Neutral C-1.2

Radiated Emission Test Photo. : Page R-1

Test Data : Horizontal R-1.1
Vertical R-1.2



PEP Testing Laboratory

CONDUCTED EMISSIONS TEST DATA

Note : HOT LINE TEST

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
0.450	35.63	-12.37	48.00	23.60	0.30	1.73	-10.00
3.435	39.01	- 8.99	48.00	26.20	1.01	1.80	-10.00
4.617	38.47	- 9.53	48.00	25.80	0.84	1.83	-10.00
5.769	38.93	- 9.07	48.00	26.20	0.88	1.85	-10.00
7.069	35.56	-12.44	48.00	22.60	1.10	1.85	-10.00
8.340	30.73	-17.27	48.00	17.80	1.07	1.86	-10.00
9.965	26.90	-21.10	48.00	14.20	0.89	1.81	-10.00
12.506	26.16	-21.84	48.00	13.20	1.12	1.84	-10.00
14.811	22.19	-25.81	48.00	9.00	1.29	1.90	-10.00
19.332	22.38	-25.62	48.00	9.00	1.39	1.99	-10.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line



PEP Testing Laboratory

CONDUCTED EMISSIONS TEST DATA

Note : NEUTRAL LINE TEST

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
3.198	32.66	-15.34	48.00	19.80	1.06	1.80	-10.00
3.494	36.19	-11.81	48.00	23.40	0.99	1.80	-10.00
5.060	36.86	-11.14	48.00	24.20	0.81	1.85	-10.00
5.858	35.54	-12.46	48.00	22.80	0.89	1.85	-10.00
6.981	32.35	-15.65	48.00	19.40	1.10	1.85	-10.00
7.926	29.04	-18.96	48.00	16.00	1.19	1.85	-10.00
9.729	27.50	-20.50	48.00	14.80	0.88	1.82	-10.00
11.738	27.09	-20.91	48.00	14.20	1.06	1.83	-10.00
12.595	27.37	-20.63	48.00	14.40	1.13	1.84	-10.00
13.363	25.25	-22.75	48.00	12.20	1.19	1.86	-10.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line



PEP Testing Laboratory

Measuring Instruments Listing :

Instrument	Manufacturer & Model	Serial Number	Band Width	Next Cal. Date	Cal. Interval
Receiver	ROHDE & SCHWARZ ESVS 30	8633421012	20 MHz to 1 GHz	Nov. 2 1998	1 year
Spectrum * Analyzer	Advantest 3261A	91720076	9 MHz to 2.6 GHz	Dec. 03 1998	1 year
Spectrum * Analyzer	HP 8591A	3225A03039	9 MHz to 1.8 GHz	Jan. 04 1998	1 year
Bi-Log Antenna	CHASE Electr. CBL 6111B	1968	20 MHz to 1 GHz	Aug. 23 1998	1 year
Horn Antenna	COM-Power AH-118	10056	1 GHz to 18 GHz	Jun. 16 1998	1 year
LISN	EMCO 3825/2	93112150	9 KHz to 100 MHz	Oct. 31 1998	1 year
LISN	Kokuyo KNW-242	8-837-7	9 KHz to 30 MHz	Jan. 03 1998	1 year

* The Model 3261A has build-in the detector function of the average and additional Q. P. adapter inside the spectrum analyzer.

* The Model 8591A has build-in the detector function of the Q. P. adapter.