

FCC TEST REPORT (15.247)

REPORT NO.: RF970911H07

MODEL NO.: NWD-211AN

RECEIVED: Sep. 11, 2008

TESTED: Sep. 23 to Oct. 03, 2008

ISSUED: Oct. 06, 2008

APPLICANT: ZyXEL Communications Corporation

ADDRESS: No. 6, Innovation Road II, Science-Park,
Hsin-Chu, 300, Taiwan

ISSUED BY: Advance Data Technology Corporation

TEST LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung
Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 164 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

1.	CERTIFICATION	6
2.	SUMMARY OF TEST RESULTS	7
2.1	MEASUREMENT UNCERTAINTY	9
3.	GENERAL INFORMATION	10
3.1	GENERAL DESCRIPTION OF EUT	10
3.2	DESCRIPTION OF TEST MODES	13
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	14
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	18
3.4	DESCRIPTION OF SUPPORT UNITS	19
3.5	CONFIGURATION OF SYSTEM UNDER TEST	19
4.	TEST TYPES AND RESULTS (802.11b & g, 2400 ~ 2483.5MHz Band)	20
4.1	CONDUCTED EMISSION MEASUREMENT	20
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	20
4.1.2	TEST INSTRUMENTS	20
4.1.3	TEST PROCEDURES	21
4.1.4	DEVIATION FROM TEST STANDARD	21
4.1.5	TEST SETUP	22
4.1.6	EUT OPERATING CONDITIONS	22
4.1.7	TEST RESULTS	23
4.2	RADIATED EMISSION MEASUREMENT	25
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	25
4.2.2	TEST INSTRUMENTS	26
4.2.3	TEST PROCEDURES	27
4.2.4	DEVIATION FROM TEST STANDARD	27
4.2.5	TEST SETUP	28
4.2.6	EUT OPERATING CONDITIONS	28
	Below 1GHz Test Data	29
4.2.7	TEST RESULTS	29
	Above 1GHz Test Data	30
4.2.8	TEST RESULTS	30
4.3	6dB BANDWIDTH MEASUREMENT	58
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	58
4.3.2	TEST INSTRUMENTS	58
4.3.3	TEST PROCEDURE	59
4.3.4	DEVIATION FROM TEST STANDARD	59
4.3.5	TEST SETUP	59

4.3.6	EUT OPERATING CONDITIONS	59
4.3.7	TEST RESULTS.....	60
4.4	MAXIMUM PEAK OUTPUT POWER	72
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	72
4.4.2	INSTRUMENTS	72
4.4.3	TEST PROCEDURES.....	73
4.4.4	DEVIATION FROM TEST STANDARD	73
4.4.5	TEST SETUP	73
4.4.6	EUT OPERATING CONDITIONS	73
4.4.7	TEST RESULTS.....	74
4.5	POWER SPECTRAL DENSITY MEASUREMENT	76
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	76
4.5.2	TEST INSTRUMENTS	76
4.5.3	TEST PROCEDURE	77
4.5.4	DEVIATION FROM TEST STANDARD	77
4.5.5	TEST SETUP	77
4.5.6	EUT OPERATING CONDITION	77
4.5.7	TEST RESULTS.....	78
4.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT	90
4.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT	90
4.6.2	TEST INSTRUMENTS	90
4.6.3	TEST PROCEDURE	90
4.6.4	DEVIATION FROM TEST STANDARD	91
4.6.5	EUT OPERATING CONDITION	91
4.6.6	TEST RESULTS.....	91
4.7	ANTENNA REQUIREMENT	104
4.7.1	STANDARD APPLICABLE.....	104
4.7.2	ANTENNA CONNECTED CONSTRUCTION	104
5.	TEST TYPES AND RESULTS (802.11a, 5725~5850MHz Band).....	105
5.1	CONDUCTED EMISSION MEASUREMENT	105
5.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	105
5.1.2	TEST INSTRUMENTS	105
5.1.3	TEST PROCEDURES.....	106
5.1.4	DEVIATION FROM TEST STANDARD	106
5.1.5	TEST SETUP	107
5.1.6	EUT OPERATING CONDITIONS	107
5.1.7	TEST RESULTS.....	108
5.2	RADIATED EMISSION MEASUREMENT	110

5.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	110
5.2.2	TEST INSTRUMENTS	111
5.2.3	TEST PROCEDURES.....	112
5.2.4	DEVIATION FROM TEST STANDARD	112
5.2.5	TEST SETUP	113
5.2.6	EUT OPERATING CONDITIONS	113
	Below 1GHz Test Data	114
5.2.7	TEST RESULTS.....	114
	Above 1GHz Test Data.....	115
5.2.8	TEST RESULTS	115
5.3	6dB BANDWIDTH MEASUREMENT	123
5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	123
5.3.2	TEST INSTRUMENTS	123
5.3.3	TEST PROCEDURE	124
5.3.4	DEVIATION FROM TEST STANDARD	124
5.3.5	TEST SETUP	124
5.3.6	EUT OPERATING CONDITIONS	124
5.3.7	TEST RESULTS.....	125
5.4	MAXIMUM PEAK OUTPUT POWER	134
5.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	134
5.4.2	INSTRUMENTS	134
5.4.3	TEST PROCEDURES.....	135
5.4.4	DEVIATION FROM TEST STANDARD	135
5.4.5	TEST SETUP	135
5.4.6	EUT OPERATING CONDITIONS	135
5.4.7	TEST RESULTS.....	136
5.5	POWER SPECTRAL DENSITY MEASUREMENT	138
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	138
5.5.2	TEST INSTRUMENTS	138
5.5.3	TEST PROCEDURE	139
5.5.4	DEVIATION FROM TEST STANDARD	139
5.5.5	TEST SETUP	139
5.5.6	EUT OPERATING CONDITION	139
5.5.7	TEST RESULTS.....	140
5.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT	149
5.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT	149
5.6.2	TEST INSTRUMENTS	149
5.6.3	TEST PROCEDURE	150

5.6.4	DEVIATION FROM TEST STANDARD	150
5.6.5	EUT OPERATING CONDITION	150
5.6.6	TEST RESULTS.....	151
5.7	ANTENNA REQUIREMENT	162
5.7.1	STANDARD APPLICABLE.....	162
5.7.2	ANTENNA CONNECTED CONSTRUCTION	162
6.	INFORMATION ON THE TESTING LABORATORIES	163
7.	APPENDIX-A- MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	164

1. CERTIFICATION

PRODUCT: Dual band Wireless N USB Adapter
BRAND NAME: ZyXEL
MODEL NO.: NWD-211AN
TEST SAMPLE: ENGINEERING SAMPLE
TESTED: Sep. 23 to Oct. 03, 2008
APPLICANT: ZyXEL Communications Corporation
STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: NWD-211AN) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Carol Liao , **DATE:** Oct. 06, 2008
(Carol Liao, Specialist)

TECHNICAL
ACCEPTANCE : Hank Chung , **DATE:** Oct. 06, 2008
Responsible for RF (Hank Chung, Deputy Manager)

APPROVED BY : May Chen , **DATE:** Oct. 06, 2008
(May Chen, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

For 802.11b & g, 2412~2462MHz Band

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.247)			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -10.58dB at 0.525MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -0.69dB at 4824.00MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

For 802.11a, 5725~5850MHz Band

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.247)			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -10.58dB at 0.525MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -0.50dB at 4660.00MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

NOTE:

1. The EUT was operating in 2400 ~ 2483.5MHz, 5.15~5.35GHz, 5.47~5.725GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 2400 ~ 2483.5MHz and 5.725~5.850GHz. For the 5.15~5.35GHz and 5.47~5.725GHz RF parameters was recorded in another test report.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.44 dB
Radiated emissions (30MHz-1GHz)	3.94 dB
Radiated emissions (1GHz -18GHz)	2.33 dB
Radiated emissions (18GHz -40GHz)	2.55 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Dual band Wireless N USB Adapter
MODEL NO.	NWD-211AN
FCC ID	I88NWD211AN
POWER SUPPLY	DC 5V from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11 / 5.5 / 2 / 1Mbps 802.11g: 54 / 48 / 36 / 24 / 18 / 12 / 9 / 6Mbps HT20 MCS0~7 (800ns GI): 65 / 58.5 / 52 / 39 / 26 / 19.5 / 13 / 6.5Mbps. HT20 MCS8~15 (800ns GI): 130 / 117 / 104 / 78 / 52 / 39 / 26 / 13Mbps. HT40 MCS0~7 (800ns GI): 135 / 121.5 / 108 / 81 / 54 / 40.5 / 27 / 13.5Mbps. HT40 MCS8~15 (800ns GI): 270 / 243 / 216 / 162 / 108 / 81 / 54 / 27Mbps. HT20 MCS0~7 (400ns GI): 72.2 / 65 / 57.8 / 43.3 / 28.9 / 21.7 / 14.4 / 7.2Mbps. HT20 MCS8~15 (400ns GI): 144.444 / 130 / 115.556 / 86.667 / 57.778 / 43.333 / 28.889 / 14.444Mbps. HT40 MCS0~7 (400ns GI): 150 / 135 / 120 / 90 / 60 / 45 / 30 / 15Mbps. HT40 MCS8~15 (400ns GI): 300 / 270 / 240 / 180 / 120 / 90 / 60 / 30Mbps.
FREQUENCY RANGE	For 15.407 802.11a: 5.18 ~ 5.32GHz, 5.50 ~ 5.70GHz
	For 15.247 802.11b & 802.11g: 2412 ~ 2462MHz 802.11a: 5.745 ~ 5.825GHz

NUMBER OF CHANNEL	For 15.407 19 for 802.11a, draft 802.11n (20MHz) 9 for draft 802.11n (40MHz)
	For 15.247(2.4GHz) 11 for 802.11b, 802.11g, draft 802.11n (20MHz) 7 for draft 802.11n (40MHz)
	For 15.247(5GHz) 5 for 802.11a, draft 802.11n (20MHz) 2 for draft 802.11n (40MHz)
MAXIMUM OUTPUT POWER	For 15.407 802.11a: 41.115mW draft 802.11n (20MHz): 35.408mW draft 802.11n (40MHz): 22.983mW For 15.247(2.4GHz) 802.11b: 103.992mW 802.11g: 341.979mW draft 802.11n (20MHz): 655.436mW draft 802.11n (40MHz): 609.593mW For 15.247(5GHz) 802.11a: 120.781mW draft 802.11n (20MHz): 189.058mW draft 802.11n (40MHz): 184.554mW
ANTENNA TYPE	Please see note 1
DATA CABLE	NA
INTERFACE	USB
ASSOCIATED DEVICES	Cradle (with 1.3m cable, Shielded) (With 2 colours of black & white)

NOTE:

- There two antennas provided to this EUT, please refer to the following table:

Transmitter Circuit	Antenna Type	For 2.4GHz Gain (dBi)	For 5.15~5.25GHz Gain (dBi)	For 5.25~5.47GHz Gain (dBi)	For 5.47~5.725GHz Gain (dBi)	For 5.725~5.85GHz Gain (dBi)	Antenna Connector
Chain(0)	PCB	-1.98	-0.85	-0.61	0.6	0.57	NA
Chain(1)	PCB	-2.46	-0.51	0.83	1.07	1.08	NA

- The EUT incorporates a MIMO function with 802.11a, 802.11b, 802.11g, draft 802.11n. Physically, the EUT provides two completed transmit and two completed receivers.

3. The EUT is 2 * 2 spatial MIMO (2Tx & 2Rx) without beam forming function. The antenna configurations are two transmitter antennas and two receiver antennas, as there are 2 PCB antennas. Spatial multiplexing modes for simultaneous transmission using 2 antennas, and for simultaneous receiver using 2 antennas. The 11a and 11bg legacy mode is limited to single transmitter only.
4. When the EUT operating in draft 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 15.
5. The EUT complies with draft 802.11n standards and backwards compatible with 802.11a, 802.11b, 802.11g products.

6. The EUT was pre-tested in chamber as the following test modes:

Pre-test Mode	Description
Mode A	With Cradle
Mode B	Without Cradle

The worse case was found in **Mode A**. Its test data were recorded in this report individually.

7. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

Eleven channels are provided for 802.11b, 802.11g, draft 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for draft 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422MHz	5	2442MHz
2	2427MHz	6	2447MHz
3	2432MHz	7	2452MHz
4	2437MHz		

Operated in 5725 ~ 5850MHz band:

Five channels are provided for 802.11a, draft 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	5745 MHz	4	5805 MHz
2	5765 MHz	5	5825 MHz
3	5785 MHz		

Two channels are provided for draft 802.11n (40MHz):

CHANNEL	FREQUENCY
1	5755 MHz
2	5795 MHz

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
-	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission

RE < 1G: Radiated Emission below 1GHz

RE ≥ 1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

ANTENNA COMBINATION MODE:

COMBINATION MODE	OPERATION MODE	CHAIN(0) (TX)	CHAIN(1) (TX)
A	802.11a	√	
B	802.11b	√	
C	802.11g	√	
D	DRAFT 802.11n(20MHz)	√	√
E	DRAFT 802.11n(40MHz)	√	√

Note:

1. The above information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.
2. Antenna 1 and Antenna 2 are PCB antennas.
3. From above mode, the different modes were chosen for pretest.

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX COMBINATION
For 2.4 GHz 802.11g	1 to 11	1	OFDM	BPSK	6	C
For 5 GHz 802.11a	1 to 5	1	OFDM	BPSK	6	A

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX COMBINATION
For 2.4 GHz 802.11g	1 to 11	1	OFDM	BPSK	6	C
For 5 GHz 802.11a	1 to 5	1	OFDM	BPSK	6	A

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX COMBINATION
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	B
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	C
For 2.4 GHz Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	13	D
For 2.4 GHz Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	27	E
802.11a	1 to 5	1,3, 5	OFDM	BPSK	6	A
For 5 GHz Draft 802.11n (20MHz)	1 to 5	1,3, 5	OFDM	BPSK	13	D
For 5 GHz Draft 802.11n (40MHz)	1 to 2	1, 2	OFDM	BPSK	27	E

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX COMBINATION
802.11b	1 to 11	1, 11	DSSS	DBPSK	1	B
802.11g	1 to 11	1, 11	OFDM	BPSK	6	C
For 2.4 GHz Draft 802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	13	D
For 2.4 GHz Draft 802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	27	E
802.11a	1 to 5	1, 5	OFDM	BPSK	6	A
For 5 GHz Draft 802.11n (20MHz)	1 to 5	1, 5	OFDM	BPSK	13	D
For 5 GHz Draft 802.11n (40MHz)	1 to 2	1, 2	OFDM	BPSK	27	E

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX COMBINATION
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	B
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	C
For 2.4 GHz Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	13	D
For 2.4 GHz Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	27	E
802.11a	1 to 5	1,3, 5	OFDM	BPSK	6	A
For 5 GHz Draft 802.11n (20MHz)	1 to 5	1,3, 5	OFDM	BPSK	13	D
For 5 GHz Draft 802.11n (40MHz)	1 to 2	1, 2	OFDM	BPSK	27	E

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Dual band Wireless N USB Adapter. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	HP	HSTNN-S19C	WFY93-WQ98K-BH 87F-KD366-RB773	FCC DoC
2	PRINTER	HP	C2642A	MY79F1C3MZ	B94C2642X
3	MODEM	ACEEX	1414	0206026775	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.8 m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core.
3	1.3 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

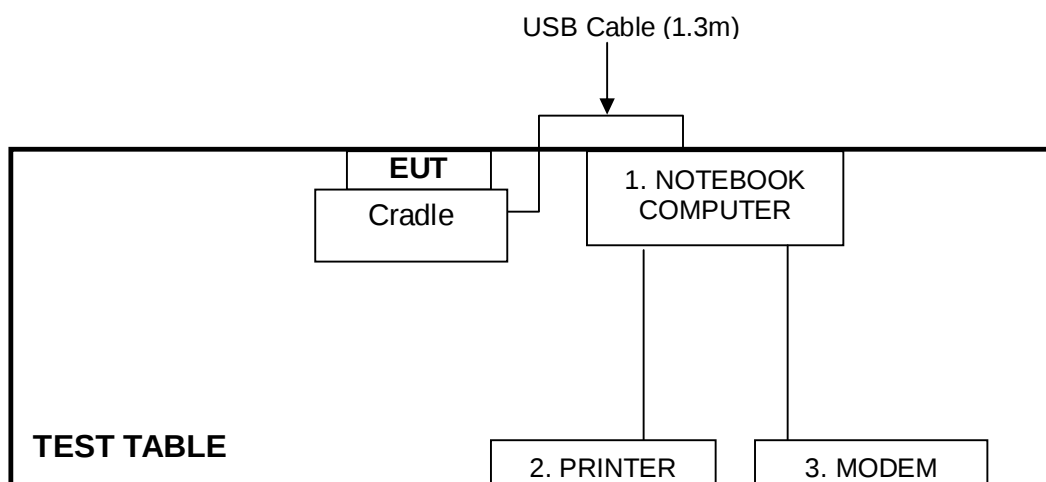

4. TEST TYPES AND RESULTS (802.11b & g, 2400 ~ 2483.5MHz Band)

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	847124/029	Feb. 29, 2008	Feb. 28, 2009
Line-Impedance Stabilization Network(for EUT)	ENV-216	100071	Nov. 27, 2007	Nov. 26, 2008
Line-Impedance Stabilization Network(for Peripheral)	ESH3-Z5	848773/004	Nov. 09, 2007	Nov. 08, 2008
RF Cable (JYEBAO)	5DFB	COBCAB-001	July 24, 2008	July 23, 2009
50 ohms Terminator	50	3	Nov. 16, 2007	Nov. 15, 2008
Software	ADT_Cond_V7.3.2	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. B.
- 3 The VCCI Con B Registration No. is C-2193.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

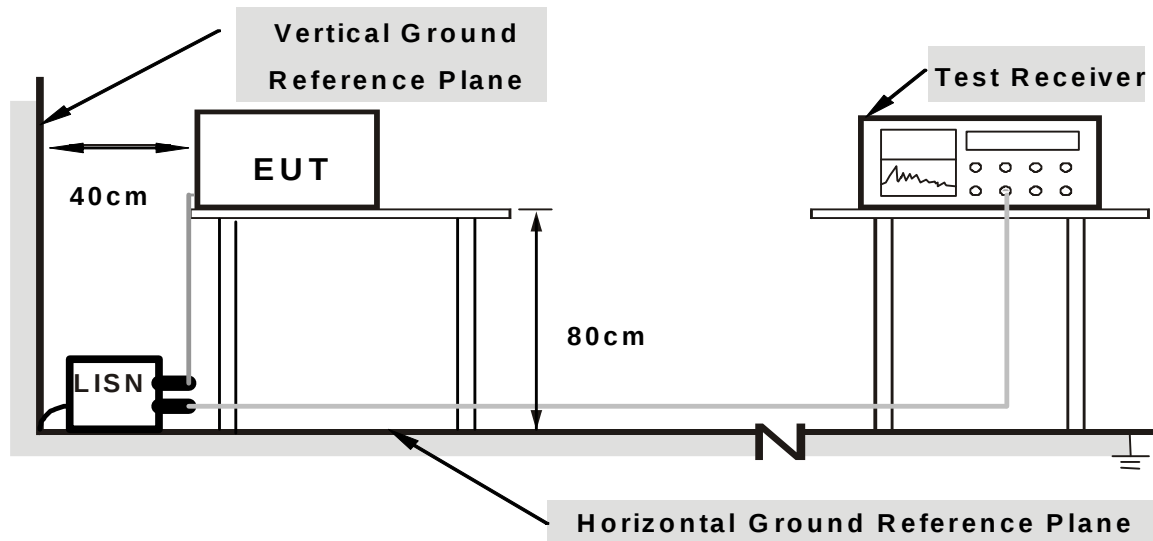

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Connect the EUT with the support unit 1 (Notebook computer) which placed on a testing table.
- b. The support unit 1 (Notebook computer) ran a test program “RT2870QA.exe” to enable EUT under transmission condition continuously.


4.1.7 TEST RESULTS

802.11g OFDM MODULATION :

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line (L)
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 965hPa	TESTED BY	Eric Lee

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.209	9.71	38.01	-	47.72	-	63.26	53.26	-15.54	-
2	0.537	9.89	26.45	-	36.34	-	56.00	46.00	-19.66	-
3	0.632	9.84	26.29	-	36.13	-	56.00	46.00	-19.87	-
4	0.959	9.69	23.07	-	32.76	-	56.00	46.00	-23.24	-
5	1.699	9.70	22.14	-	31.84	-	56.00	46.00	-24.16	-
6	25.859	9.98	20.76	-	30.74	-	60.00	50.00	-29.26	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

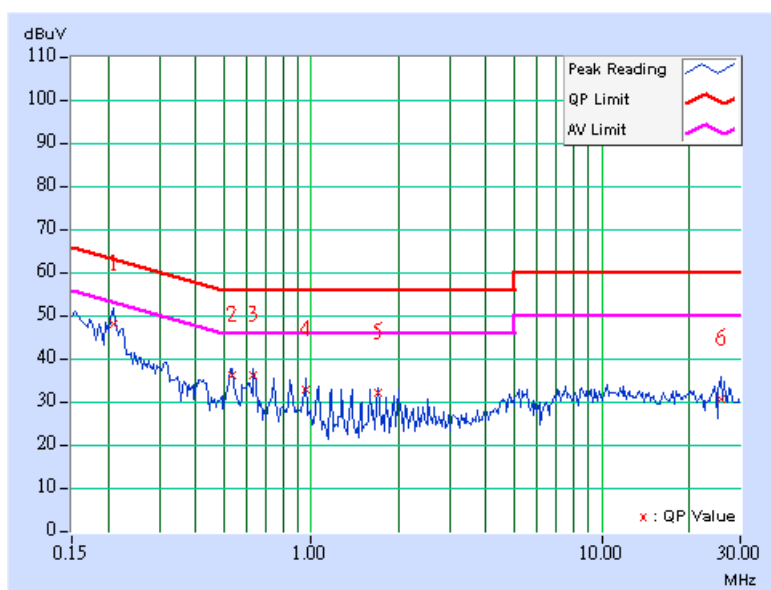

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Neutral (N)
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 965hPa	TESTED BY	Eric Lee

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.213	9.72	39.41	-	49.13	-	63.11	53.11	-13.98	-
2	0.525	9.88	35.54	-	45.42	-	56.00	46.00	-10.58	-
3	0.736	9.79	34.06	-	43.85	-	56.00	46.00	-12.15	-
4	1.789	9.71	33.38	-	43.09	-	56.00	46.00	-12.91	-
5	2.105	9.72	31.79	-	41.51	-	56.00	46.00	-14.49	-
6	6.735	9.81	29.99	-	39.80	-	60.00	50.00	-20.20	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

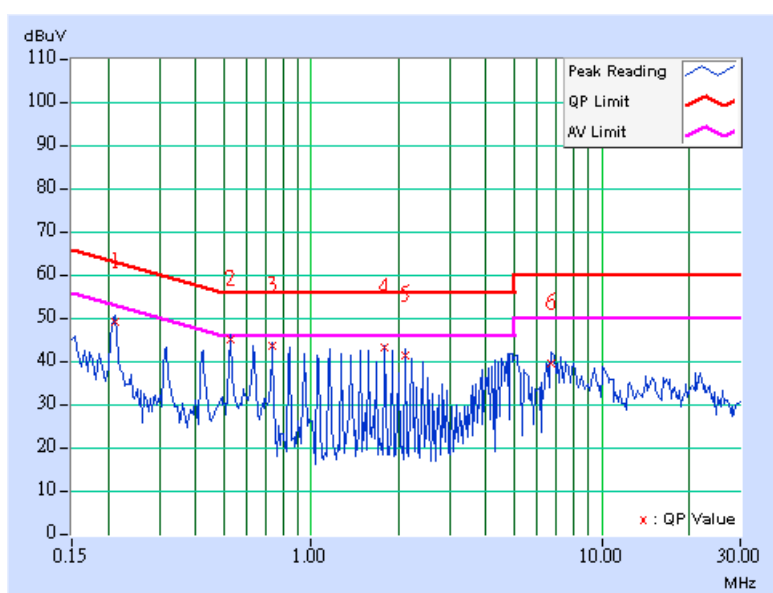

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ADVANTEST Spectrum Analyzer	R3271A	85060311	July 16, 2008	July 15, 2009
HP Pre_Amplifier	8449B	3008A01922	Oct. 05, 2007	Oct. 04, 2008
ROHDE & SCHWARZ Test Receiver	ESCS30	100375	April 01, 2008	Mar. 31, 2009
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	April 30, 2008	April 29, 2009
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 17, 2007	Dec. 16, 2008
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 28, 2008	Jan. 27, 2009
R&S Loop Antenna	HFH2-Z2	100070	Jan. 14, 2008	Jan. 13, 2009
RF Switches (ARNITSU)	CS-201	1565157	Aug. 13, 2008	Aug. 12, 2009
RF CABLE (Chaintek)	SF102	22054-2	Dec. 07, 2007	Dec. 06, 2008
RF Cable	8DFB	STCCAB-30 M-1GHz	Oct. 10, 2007	Oct. 09, 2008
Software	ADT_Radiated_V7.6.15.8	NA	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA	NA
CHANCE MOST Turn Table	TT-100	0203	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: R3271A) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 3789C-3.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

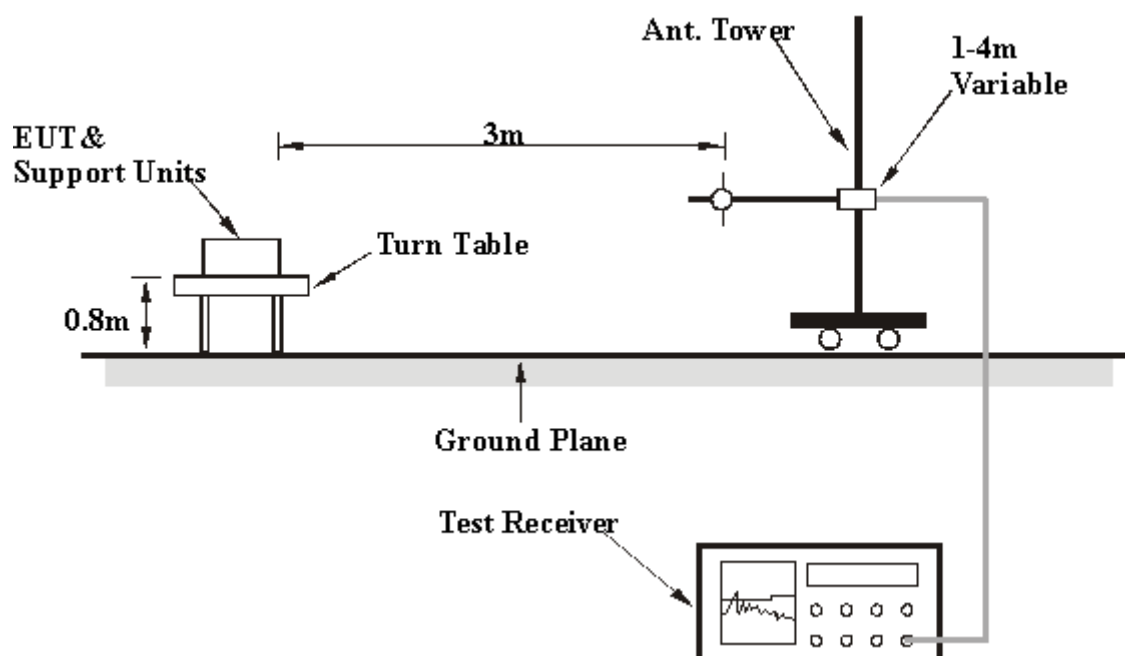

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as the 4.1.6

Below 1GHz Test Data

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA : 802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24deg. C, 74%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	60.45	21.34 QP	40.00	-18.66	1.00 H	150	6.35	14.99
2	245.50	33.86 QP	46.00	-12.14	1.04 H	279	17.76	16.10
3	263.98	34.30 QP	46.00	-11.70	1.00 H	216	17.56	16.74
4	360.00	32.66 QP	46.00	-13.34	1.06 H	157	12.27	20.39
5	480.00	32.64 QP	46.00	-13.36	1.00 H	7	8.99	23.65
6	720.00	35.62 QP	46.00	-10.38	1.00 H	169	6.59	29.03
7	880.00	33.45 QP	46.00	-12.55	1.00 H	145	1.22	32.23
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	60.60	28.44 QP	40.00	-11.56	1.00 V	134	13.48	14.96
2	120.00	22.69 QP	43.50	-20.81	1.00 V	257	8.21	14.48
3	240.25	23.64 QP	46.00	-22.36	1.48 V	356	7.81	15.83
4	360.00	24.66 QP	46.00	-21.34	1.00 V	257	4.27	20.39
5	480.00	31.87 QP	46.00	-14.13	1.01 V	123	8.22	23.65
6	720.00	32.98 QP	46.00	-13.02	1.03 V	214	3.95	29.03
7	880.00	28.66 QP	46.00	-17.34	1.09 V	159	-3.57	32.23

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

Above 1GHz Test Data

4.2.8 TEST RESULTS

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.320	58.58 PK	74.00	-15.42	1.34 H	22	28.53	30.05
2	2386.320	49.02 AV	54.00	-4.98	1.34 H	22	18.97	30.05
3	*2412.000	100.42 PK			1.37 H	22	70.27	30.15
4	*2412.000	95.40 AV			1.37 H	22	65.25	30.15
5	4824.000	55.74 PK	74.00	-18.26	1.29 H	200	20.28	35.46
6	4824.000	53.31 AV	54.00	-0.69	1.29 H	200	17.85	35.46
7	7236.000	52.23 PK	74.00	-21.77	1.30 H	187	10.38	41.85
8	7236.000	47.73 AV	54.00	-6.27	1.30 H	187	5.88	41.85
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.480	58.31 PK	74.00	-15.69	1.22 V	71	28.26	30.05
2	2386.480	49.52 AV	54.00	-4.48	1.22 V	71	19.47	30.05
3	*2412.000	102.50 PK			1.17 V	72	72.35	30.15
4	*2412.000	97.62 AV			1.17 V	72	67.47	30.15
5	4824.000	53.40 PK	74.00	-20.60	1.35 V	300	17.94	35.46
6	4824.000	50.29 AV	54.00	-3.71	1.35 V	300	14.83	35.46
7	7236.000	52.25 PK	74.00	-21.75	1.23 V	256	10.40	41.85
8	7236.000	39.58 AV	54.00	-14.42	1.23 V	256	-2.27	41.85

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.000	101.53 PK			1.62 H	17	71.29	30.24
2	*2437.000	96.50 AV			1.62 H	17	66.26	30.24
3	4874.000	53.44 PK	74.00	-20.56	1.55 H	195	17.89	35.55
4	4874.000	50.83 AV	54.00	-3.17	1.55 H	195	15.28	35.55
5	7311.000	52.05 PK	74.00	-21.95	1.25 H	358	10.01	42.04
6	7311.000	41.07 AV	54.00	-12.93	1.25 H	358	-0.97	42.04
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.000	99.71 PK			1.07 V	21	69.47	30.24
2	*2437.000	94.24 AV			1.07 V	21	64.00	30.24
3	4874.000	52.32 PK	74.00	-21.68	1.31 V	344	16.77	35.55
4	4874.000	49.20 AV	54.00	-4.80	1.31 V	344	13.65	35.55
5	7311.000	51.20 PK	74.00	-22.80	1.20 V	245	9.16	42.04
6	7311.000	38.90 AV	54.00	-15.10	1.20 V	245	-3.14	42.04



REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 965hPa	TESTED BY	Frank Liu



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.000	102.20 PK			1.29 H	181	71.86	30.34
2	*2462.000	96.91 AV			1.29 H	181	66.57	30.34
3	2487.750	59.89 PK	74.00	-14.11	1.19 H	179	29.45	30.44
4	2487.750	49.47 AV	54.00	-4.53	1.19 H	179	19.03	30.44
5	4924.000	53.80 PK	74.00	-20.20	1.33 H	199	18.17	35.63
6	4924.000	50.90 AV	54.00	-3.10	1.33 H	199	15.27	35.63
7	7386.000	51.80 PK	74.00	-22.20	1.22 H	199	9.57	42.23
8	7386.000	39.18 AV	54.00	-14.82	1.22 H	199	-3.05	42.23
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.000	102.10 PK			1.05 V	20	71.76	30.34
2	*2462.000	96.82 AV			1.05 V	20	66.48	30.34
3	2487.570	60.03 PK	74.00	-13.97	1.41 V	74	29.59	30.44
4	2487.570	49.14 AV	54.00	-4.86	1.41 V	74	18.70	30.44
5	4924.000	51.50 PK	74.00	-22.50	1.43 V	87	15.87	35.63
6	4924.000	47.94 AV	54.00	-6.06	1.43 V	87	12.31	35.63
7	7386.000	51.20 PK	74.00	-22.80	1.28 V	290	8.97	42.23
8	7386.000	38.80 AV	54.00	-15.20	1.28 V	290	-3.43	42.23

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.


RESTRICTED BANDEDGE (802.11b MODE, CH1, HORIZONTAL)

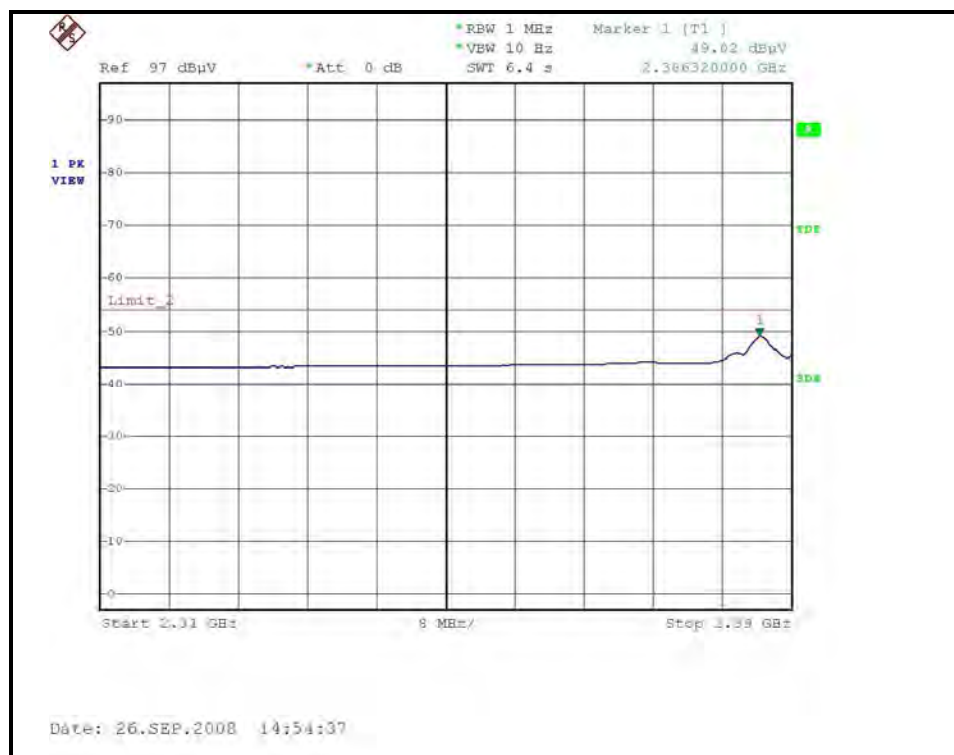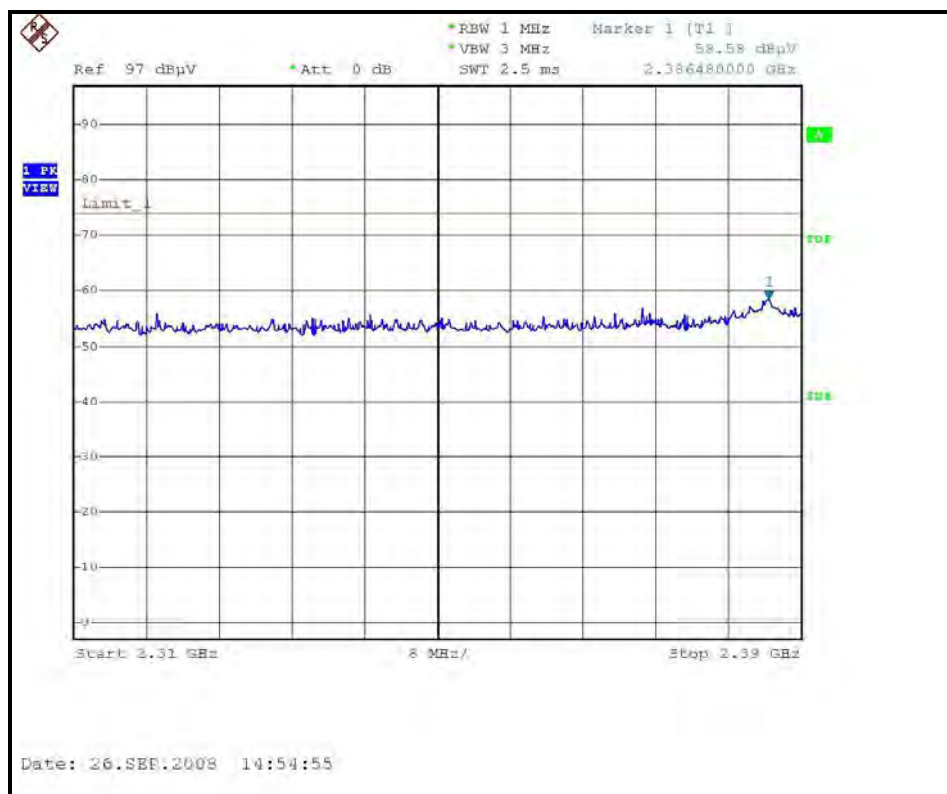



RESTRICTED BANDEDGE (802.11b MODE,CH1, VERTICAL)

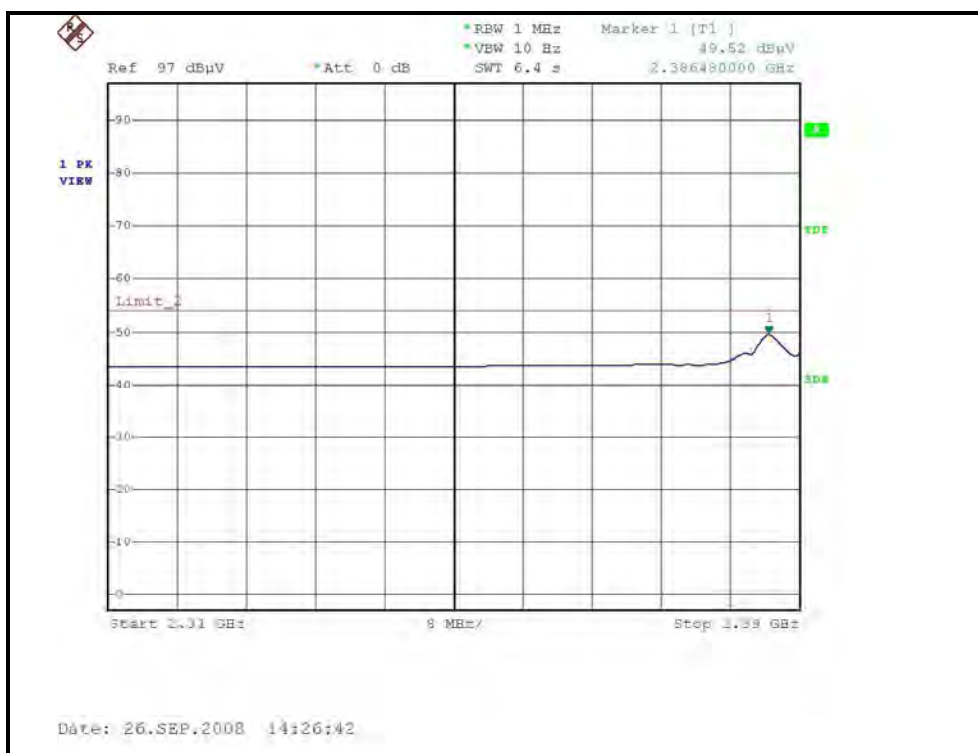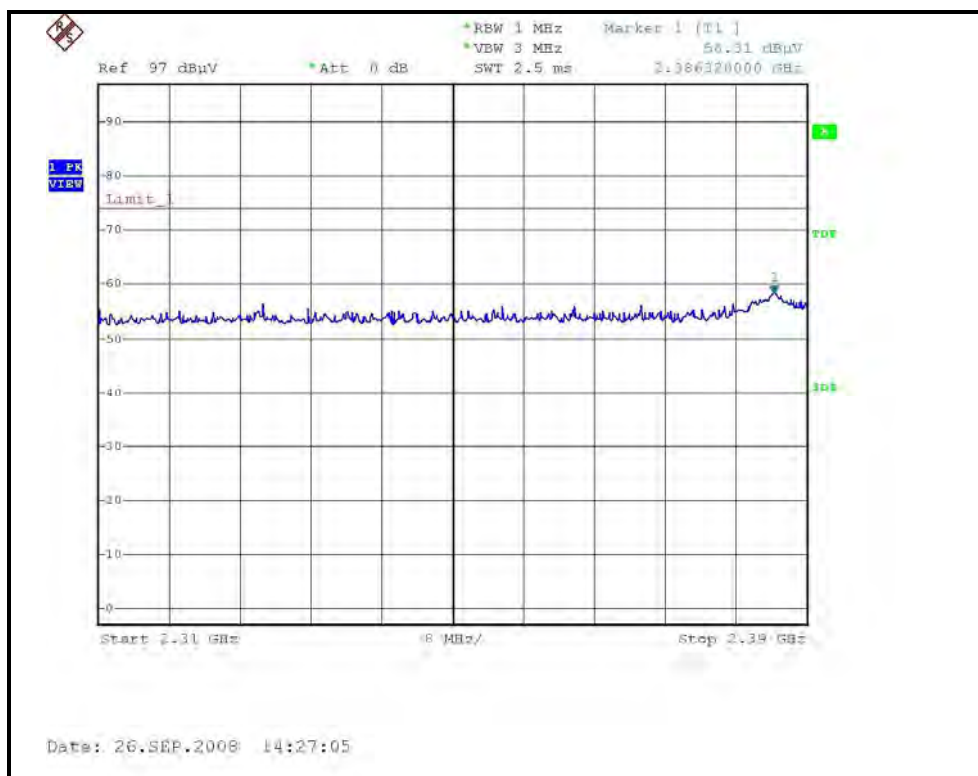

RESTRICTED BANDEDGE (802.11b MODE, CH11, HORIZONTAL)

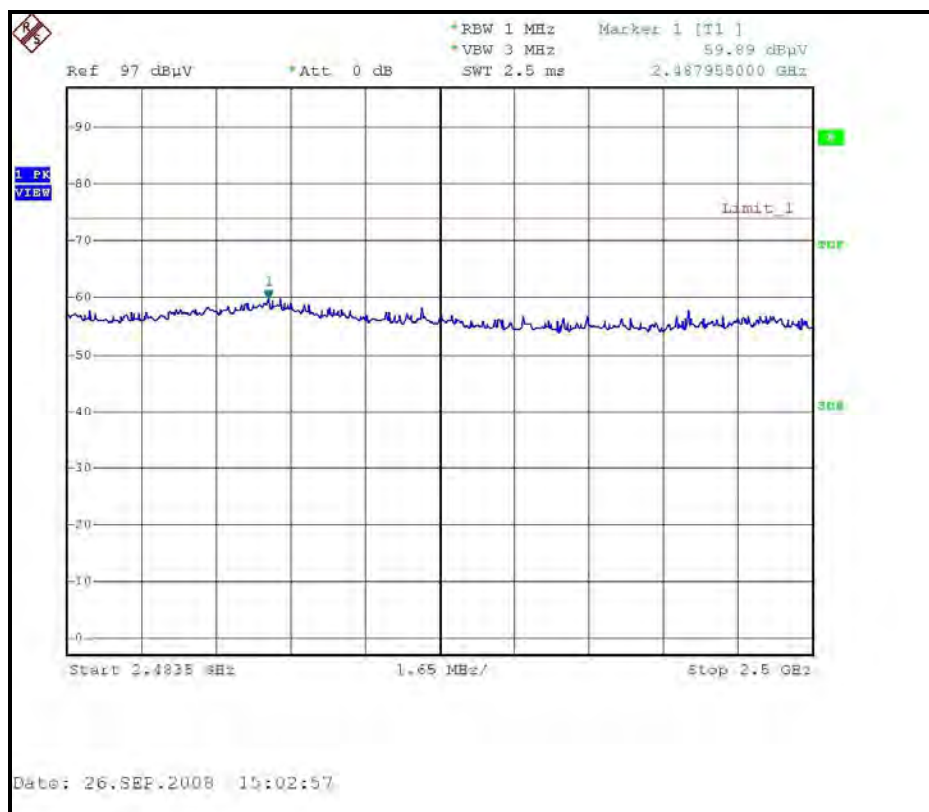

RESTRICTED BANDEDGE (802.11b MODE, CH11, VERTICAL)

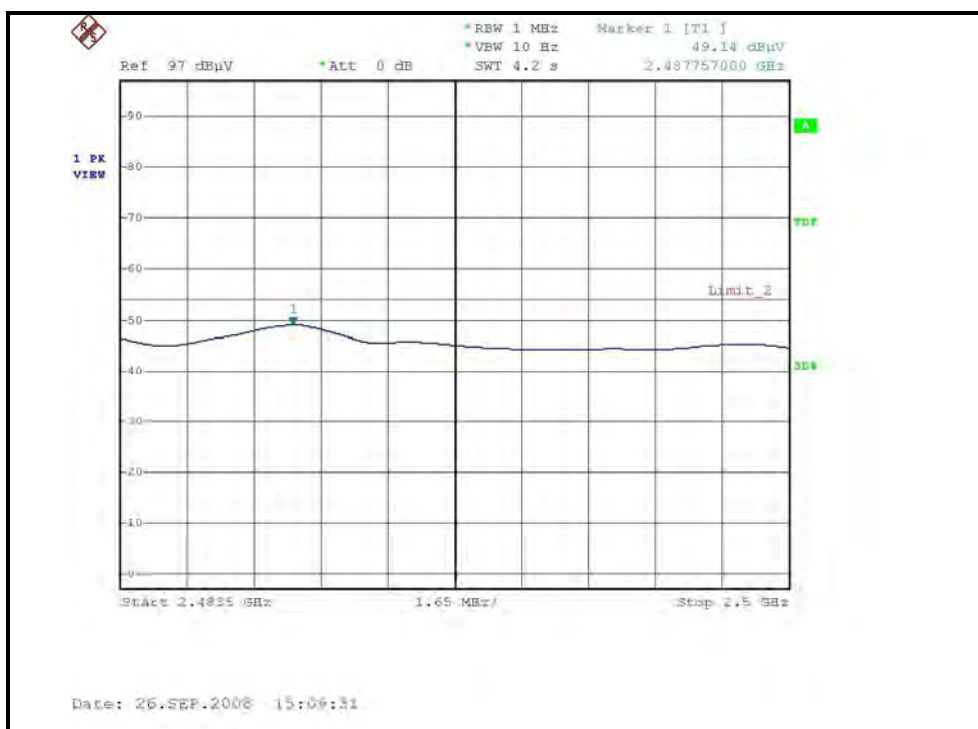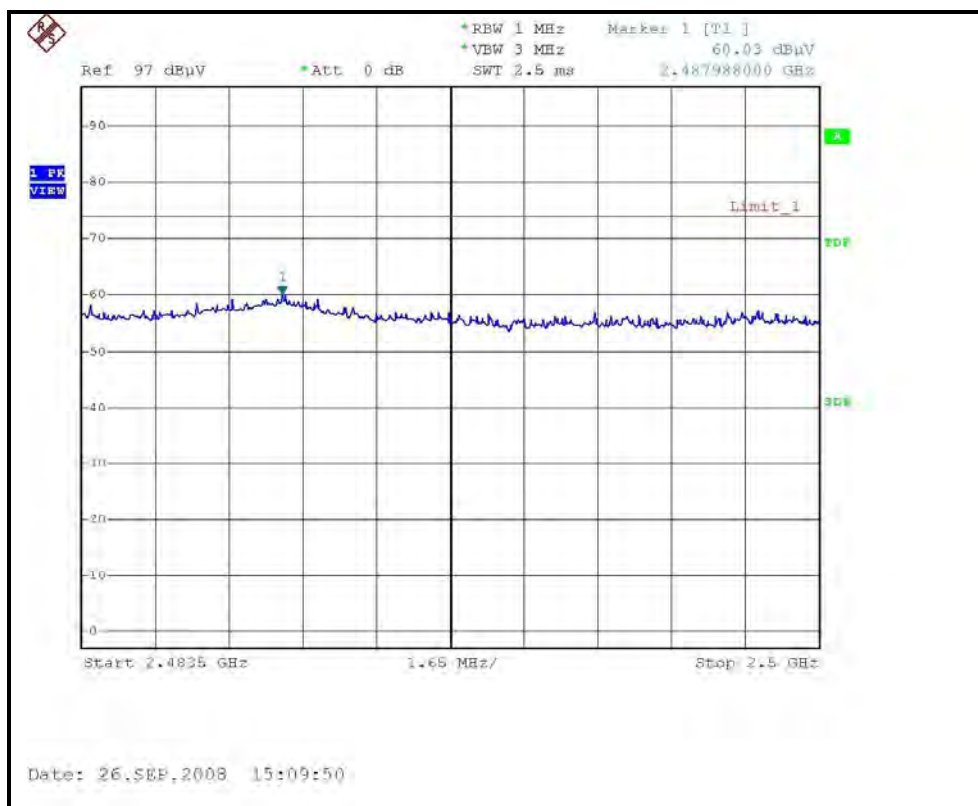

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2389.200	66.95 PK	74.00	-7.05	1.59 H	346	36.89	30.06
2	2389.200	46.85 AV	54.00	-7.15	1.59 H	346	16.79	30.06
3	*2412.000	105.20 PK			1.50 H	345	75.05	30.15
4	*2412.000	94.50 AV			1.50 H	345	64.35	30.15
5	4824.000	54.00 PK	74.00	-20.00	1.47 H	28	18.54	35.46
6	4824.000	40.81 AV	54.00	-13.19	1.47 H	28	5.35	35.46
7	7236.000	58.36 PK	74.00	-15.64	1.29 H	186	16.51	41.85
8	7236.000	43.74 AV	54.00	-10.26	1.29 H	186	1.89	41.85
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2389.300	67.34 PK	74.00	-6.66	1.40 V	249	37.28	30.06
2	2389.300	46.82 AV	54.00	-7.18	1.40 V	249	16.76	30.06
3	*2412.000	106.00 PK			1.40 V	281	75.85	30.15
4	*2412.000	95.40 AV			1.40 V	281	65.25	30.15
5	4824.000	52.18 PK	74.00	-21.82	1.50 V	1	16.72	35.46
6	4824.000	39.36 AV	54.00	-14.64	1.50 V	1	3.90	35.46
7	7236.000	55.77 PK	74.00	-18.23	1.03 V	247	13.92	41.85
8	7236.000	41.53 AV	54.00	-12.47	1.03 V	247	-0.32	41.85

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.000	104.70 PK			1.29 H	130	74.46	30.24
2	*2437.000	94.30 AV			1.29 H	130	64.06	30.24
3	4874.000	54.11 PK	74.00	-19.89	1.25 H	118	18.56	35.55
4	4874.000	40.20 AV	54.00	-13.80	1.25 H	118	4.65	35.55
5	7311.000	52.80 PK	74.00	-21.20	1.13 H	20	10.76	42.04
6	7311.000	41.40 AV	54.00	-12.60	1.13 H	20	-0.64	42.04
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.000	104.90 PK			1.22 V	90	74.66	30.24
2	*2437.000	95.20 AV			1.22 V	90	64.96	30.24
3	4874.000	50.80 PK	74.00	-23.20	1.12 V	170	15.25	35.55
4	4874.000	37.46 AV	54.00	-16.54	1.12 V	170	1.91	35.55
5	7311.000	56.30 PK	74.00	-17.70	1.62 V	94	14.26	42.04
6	7311.000	40.99 AV	54.00	-13.01	1.62 V	94	-1.05	42.04


REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 965hPa	TESTED BY	Frank Liu


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.000	104.33 PK			1.20 H	102	73.99	30.34
2	*2462.000	94.27 AV			1.20 H	102	63.93	30.34
3	2483.500	63.01 PK	74.00	-10.99	1.53 H	15	32.58	30.43
4	2483.500	49.18 AV	54.00	-4.82	1.53 H	15	18.75	30.43
5	4924.000	53.28 PK	74.00	-20.72	1.39 H	200	17.65	35.63
6	4924.000	39.71 AV	54.00	-14.29	1.39 H	200	4.08	35.63
7	7386.000	54.33 PK	74.00	-19.67	1.10 H	0	12.10	42.23
8	7386.000	40.97 AV	54.00	-13.03	1.10 H	0	-1.26	42.23
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.000	103.39 PK			1.00 V	299	73.05	30.34
2	*2462.000	93.19 AV			1.00 V	299	62.85	30.34
3	2483.500	62.97 PK	74.00	-11.03	1.43 V	104	32.54	30.43
4	2483.500	49.37 AV	54.00	-4.63	1.43 V	104	18.94	30.43
5	4924.000	50.94 PK	74.00	-23.06	1.05 V	45	15.31	35.63
6	4924.000	37.01 AV	54.00	-16.99	1.05 V	45	1.38	35.63
7	7386.000	52.97 PK	74.00	-21.03	1.28 V	249	10.74	42.23
8	7386.000	39.02 AV	54.00	-14.98	1.28 V	249	-3.21	42.23

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



RESTRICTED BANDEDGE (802.11g MODE, CH1, HORIZONTAL)

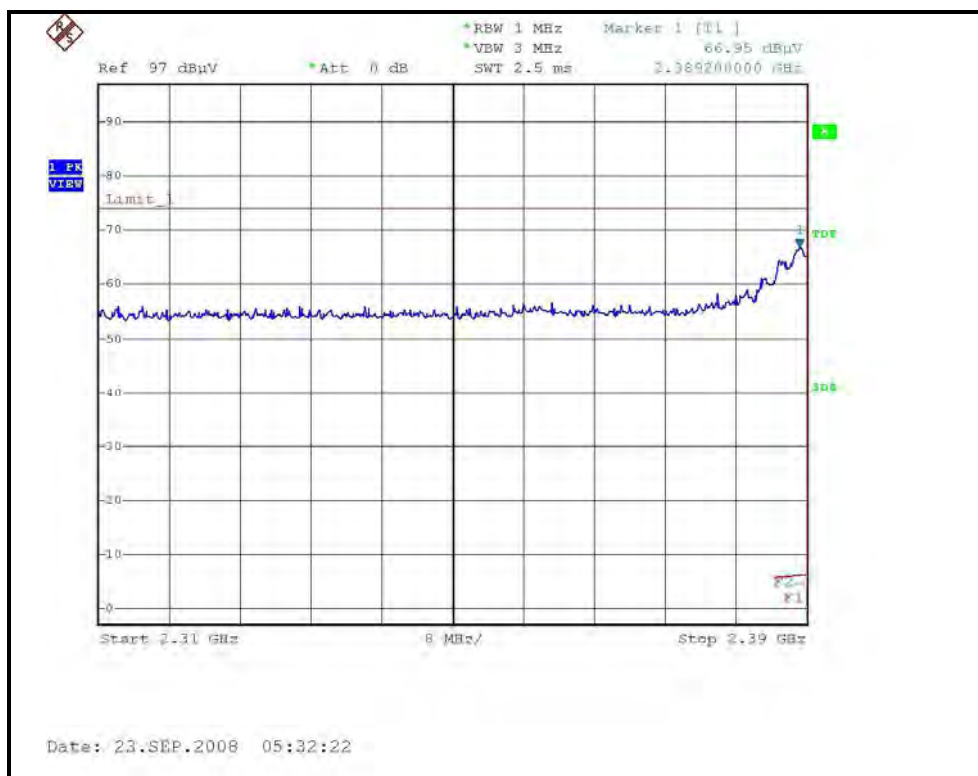


RESTRICTED BANDEDGE (802.11g MODE, CH1, VERTICAL)

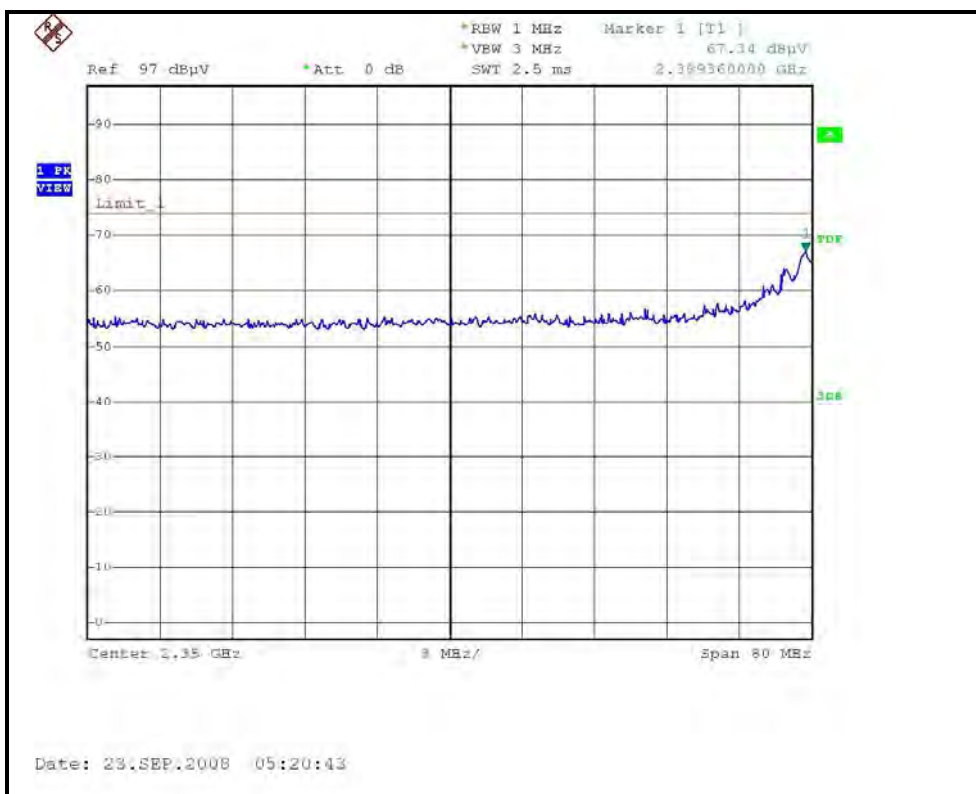

RESTRICTED BANDEDGE (802.11g MODE, CH11, HORIZONTAL)

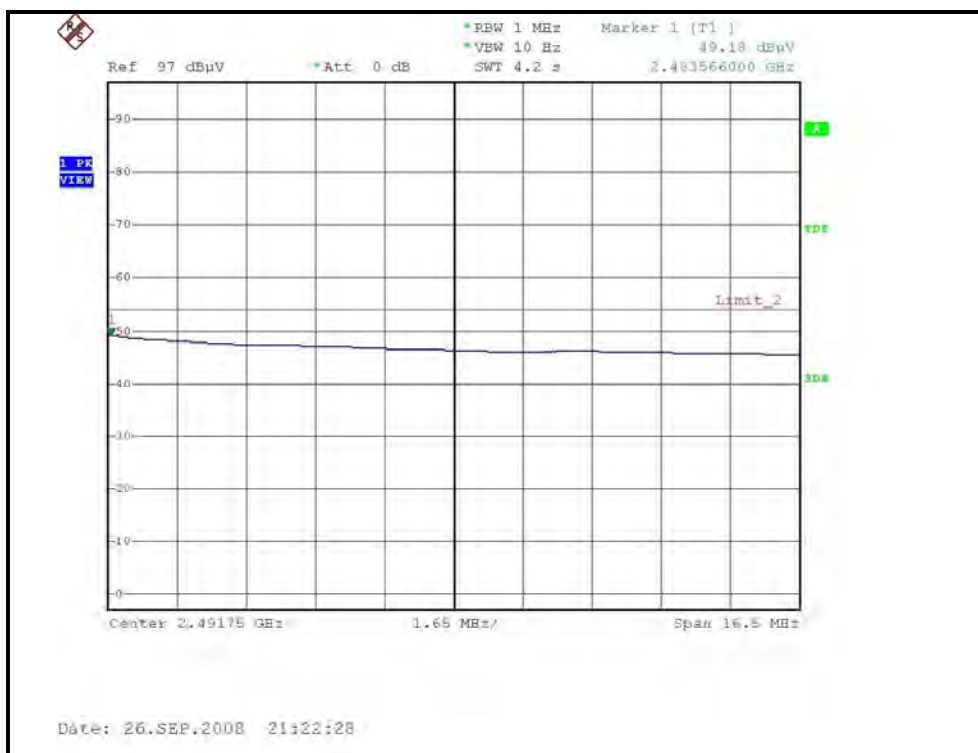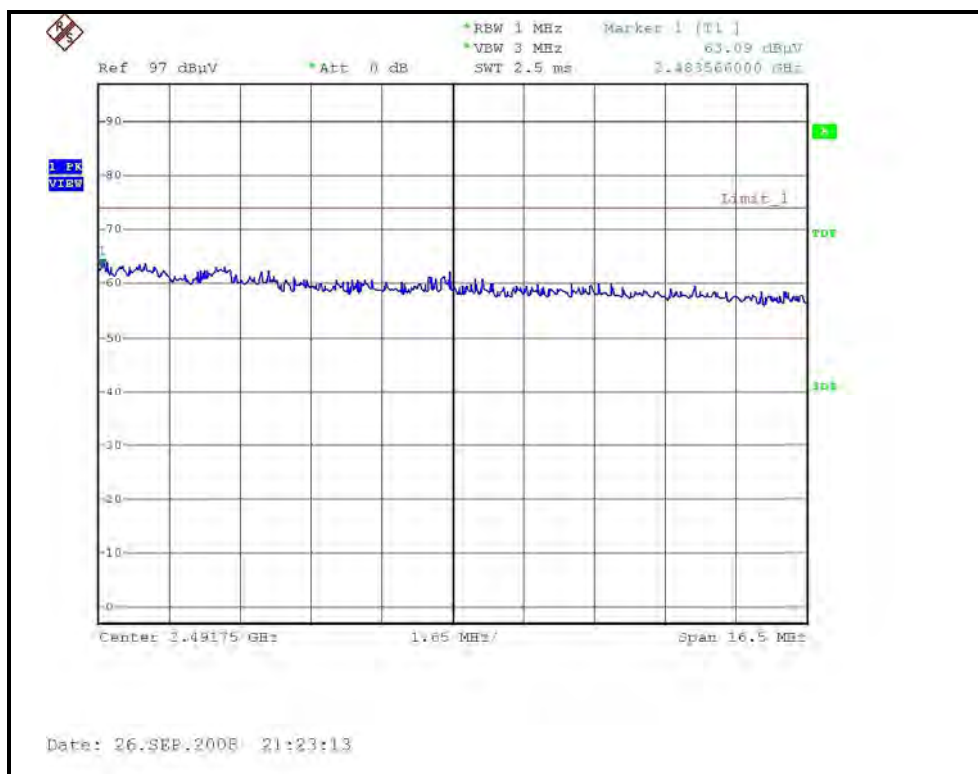

RESTRICTED BANDEDGE (802.11g MODE, CH11, VERTICAL)

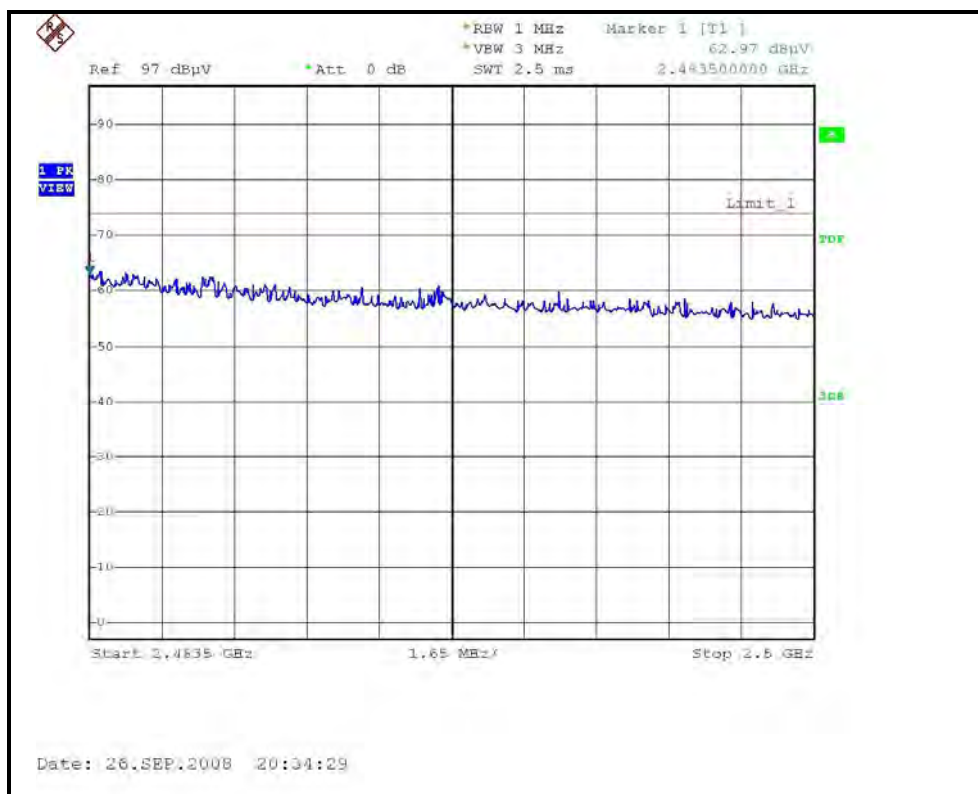

DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.000	72.34 PK	74.00	-1.66	1.61 H	165	42.28	30.06
2	2390.000	53.15 AV	54.00	-0.85	1.61 H	165	23.09	30.06
3	*2412.000	106.00 PK			1.52 H	168	75.85	30.15
4	*2412.000	94.37 AV			1.52 H	168	64.22	30.15
5	4824.000	53.95 PK	74.00	-20.05	1.41 H	193	18.49	35.46
6	4824.000	41.23 AV	54.00	-12.77	1.41 H	193	5.77	35.46
7	7236.000	56.30 PK	74.00	-17.70	1.09 H	183	14.45	41.85
8	7236.000	41.07 AV	54.00	-12.93	1.09 H	183	-0.78	41.85
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.000	71.89 PK	74.00	-2.11	1.49 V	71	41.83	30.06
2	2390.000	53.28 AV	54.00	-0.72	1.49 V	71	23.22	30.06
3	*2412.000	109.60 PK			1.21 V	69	79.45	30.15
4	*2412.000	97.90 AV			1.21 V	69	67.75	30.15
5	4824.000	53.84 PK	74.00	-20.16	1.50 V	6	18.38	35.46
6	4824.000	41.00 AV	54.00	-13.00	1.50 V	6	5.54	35.46
7	7236.000	52.00 PK	74.00	-22.00	1.22 V	278	10.15	41.85
8	7236.000	38.83 AV	54.00	-15.17	1.22 V	278	-3.02	41.85

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.000	105.36 PK			1.59 H	84	75.12	30.24
2	*2437.000	93.42 AV			1.59 H	84	63.18	30.24
3	4874.000	53.26 PK	74.00	-20.74	1.55 H	215	17.71	35.55
4	4874.000	40.59 AV	54.00	-13.41	1.55 H	215	5.04	35.55
5	7311.000	55.10 PK	74.00	-18.90	1.34 H	341	13.06	42.04
6	7311.000	40.13 AV	54.00	-13.87	1.34 H	341	-1.91	42.04
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.000	107.64 PK			1.41 V	282	77.40	30.24
2	*2437.000	95.86 AV			1.41 V	282	65.62	30.24
3	4874.000	54.00 PK	74.00	-20.00	1.22 V	28	18.45	35.55
4	4874.000	41.00 AV	54.00	-13.00	1.22 V	28	5.45	35.55
5	7311.000	52.30 PK	74.00	-21.70	1.20 V	264	10.26	42.04
6	7311.000	38.90 AV	54.00	-15.10	1.20 V	264	-3.14	42.04


REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 965hPa	TESTED BY	Frank Liu



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.000	104.89 PK			1.72 H	185	74.55	30.34
2	*2462.000	93.08 AV			1.72 H	185	62.74	30.34
3	2483.500	70.14 PK	74.00	-3.86	1.32 H	127	39.71	30.43
4	2483.500	50.92 AV	54.00	-3.08	1.32 H	127	20.49	30.43
5	4924.000	52.72 PK	74.00	-21.28	1.44 H	29	17.09	35.63
6	4924.000	40.31 AV	54.00	-13.69	1.44 H	29	4.68	35.63
7	7386.000	55.70 PK	74.00	-18.30	1.32 H	127	13.47	42.23
8	7386.000	41.60 AV	54.00	-12.40	1.32 H	127	-0.63	42.23
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.000	108.02 PK			1.41 V	83	77.68	30.34
2	*2462.000	95.81 AV			1.41 V	83	65.47	30.34
3	2483.500	68.83 PK	74.00	-5.17	1.40 V	83	38.40	30.43
4	2483.500	50.77 AV	54.00	-3.23	1.40 V	83	20.34	30.43
5	4924.000	53.99 PK	74.00	-20.01	1.50 V	322	18.36	35.63
6	4924.000	41.72 AV	54.00	-12.28	1.50 V	322	6.09	35.63
7	7386.000	51.80 PK	74.00	-22.20	1.18 V	29	9.57	42.23
8	7386.000	38.70 AV	54.00	-15.30	1.18 V	29	-3.53	42.23

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.


RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE, CH1, HORIZONTAL)

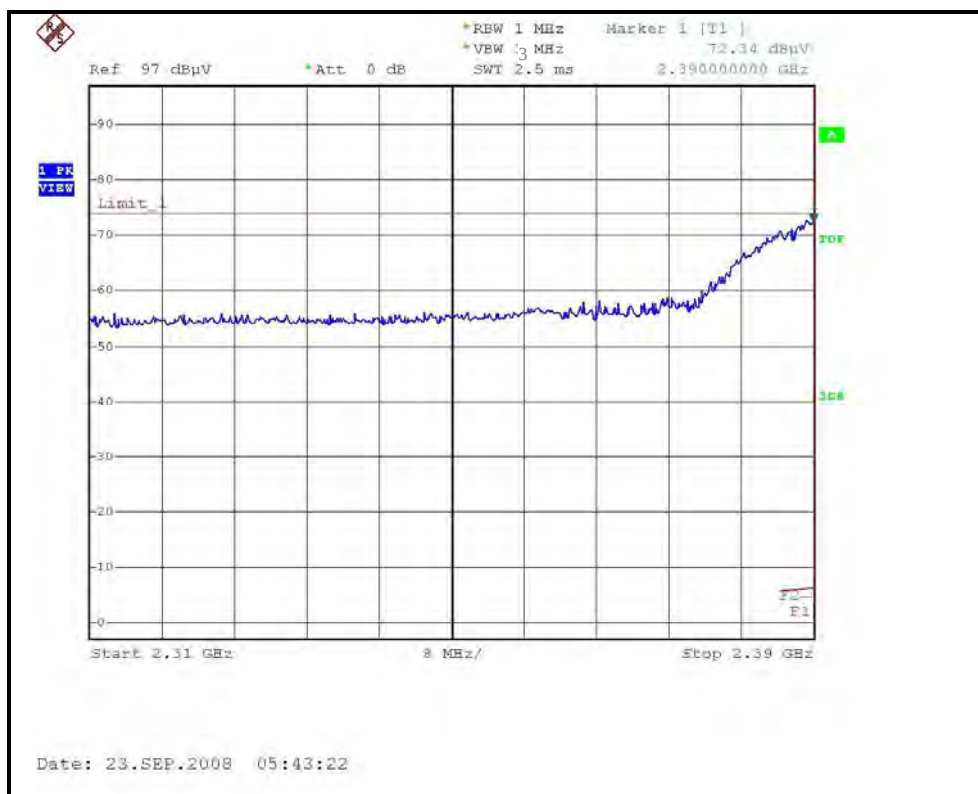


RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE,CH1, VERTICAL)

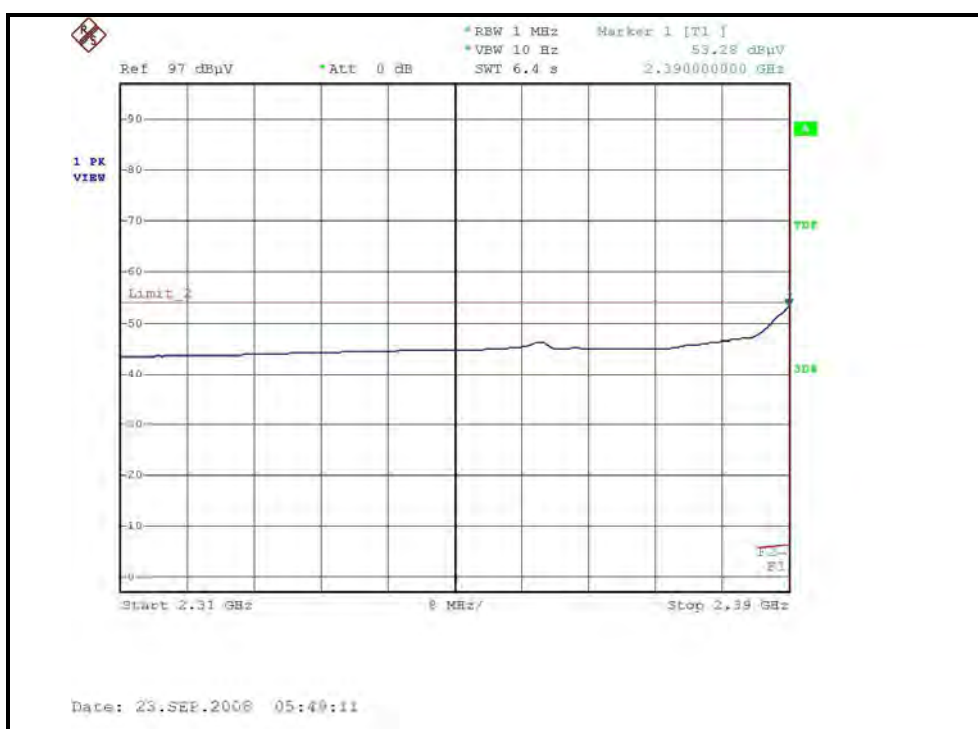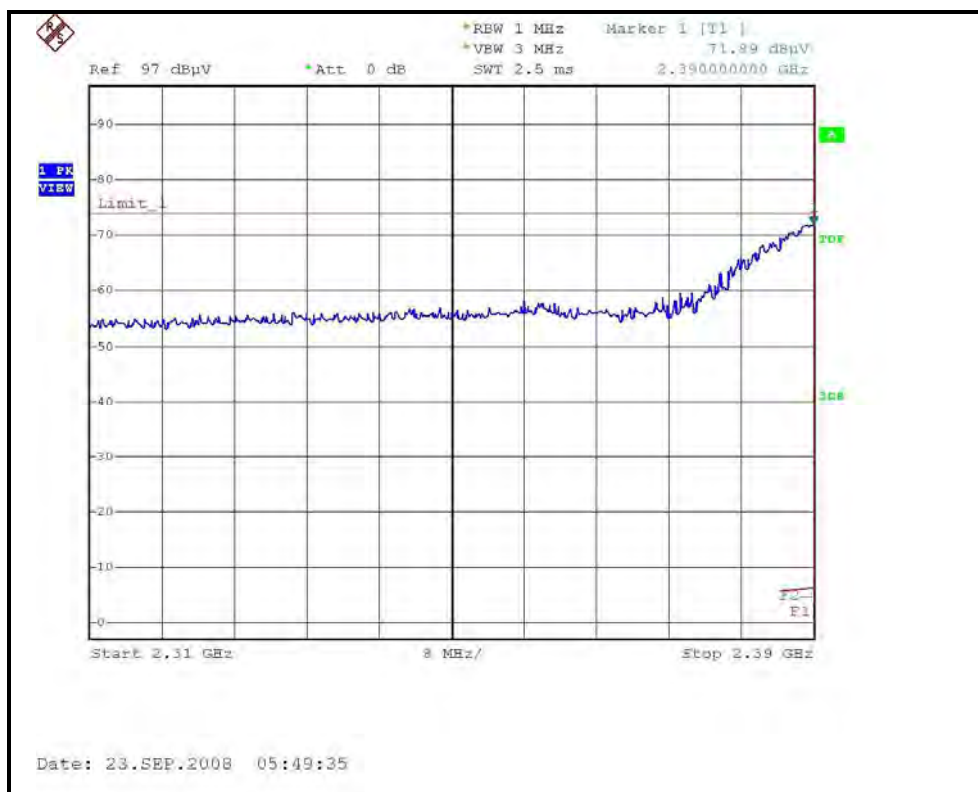

RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE, CH11, HORIZONTAL)

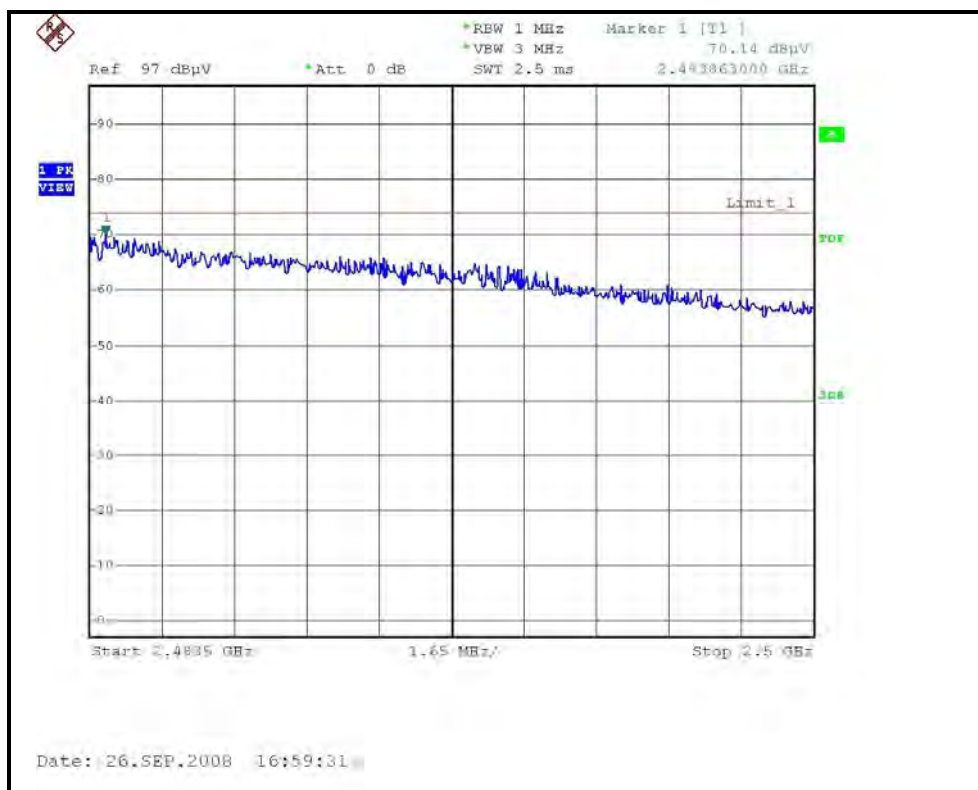

RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE,CH11, VERTICAL)

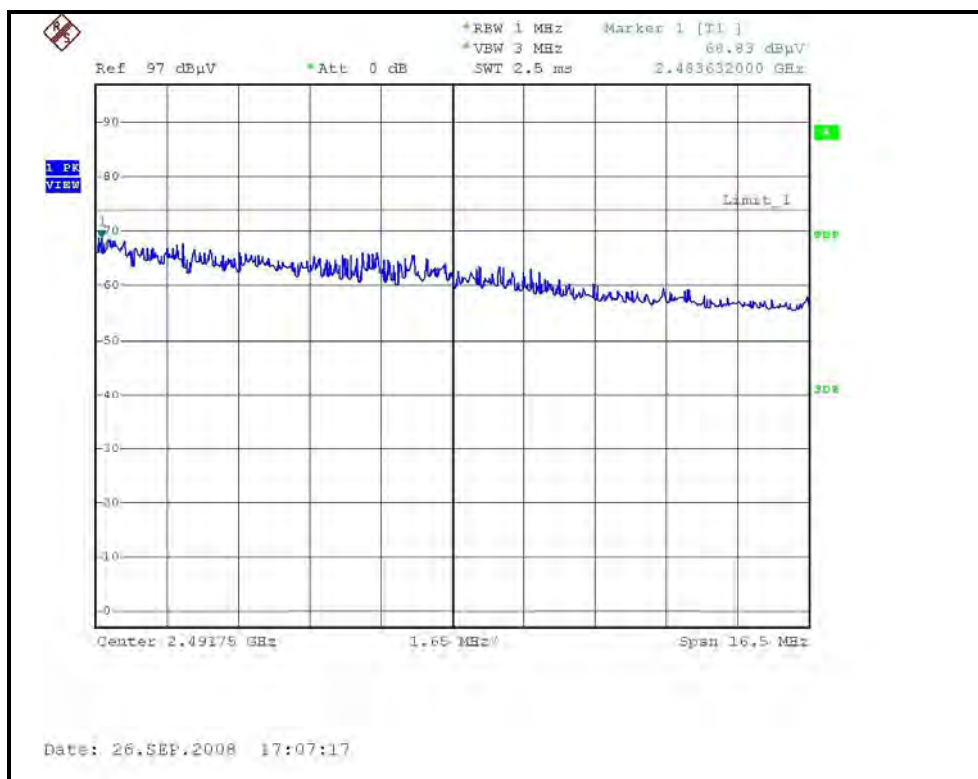

DRAFT 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.000	61.51 PK	74.00	-12.49	1.76 H	359	31.45	30.06
2	2390.000	48.91 AV	54.00	-5.09	1.76 H	359	18.85	30.06
3	*2412.000	101.12 PK			1.59 H	83	70.97	30.15
4	*2412.000	89.78 AV			1.59 H	83	59.63	30.15
5	4844.000	51.76 PK	74.00	-22.24	1.14 H	210	16.26	35.50
6	4844.000	39.52 AV	54.00	-14.48	1.14 H	210	4.02	35.50
7	7266.000	54.68 PK	74.00	-19.32	1.00 H	360	12.75	41.93
8	7266.000	39.83 AV	54.00	-14.17	1.00 H	360	-2.10	41.93
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.000	62.32 PK	74.00	-11.68	1.41 V	194	32.26	30.06
2	2390.000	50.24 AV	54.00	-3.76	1.41 V	194	20.18	30.06
3	*2422.000	103.30 PK			1.44 V	84	73.11	30.19
4	*2422.000	92.44 AV			1.44 V	84	62.25	30.19
5	4844.000	50.90 PK	74.00	-23.10	1.34 V	12	15.40	35.50
6	4844.000	37.20 AV	54.00	-16.80	1.34 V	12	1.70	35.50
7	7266.000	50.32 PK	74.00	-23.68	1.10 V	122	8.39	41.93
8	7266.000	37.94 AV	54.00	-16.06	1.10 V	122	-3.99	41.93

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.000	101.11 PK			1.59 H	84	70.87	30.24
2	*2437.000	89.69 AV			1.59 H	84	59.45	30.24
3	4874.000	50.03 PK	74.00	-23.97	1.22 H	204	14.48	35.55
4	4874.000	36.85 AV	54.00	-17.15	1.22 H	204	1.30	35.55
5	7311.000	50.81 PK	74.00	-23.19	1.15 H	190	8.77	42.04
6	7311.000	38.25 AV	54.00	-15.75	1.15 H	190	-3.79	42.04
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.000	106.90 PK			1.42 V	282	76.66	30.24
2	*2437.000	92.10 AV			1.42 V	282	61.86	30.24
3	4874.000	50.50 PK	74.00	-23.50	1.32 V	0	14.95	35.55
4	4874.000	36.63 AV	54.00	-17.37	1.32 V	0	1.08	35.55
5	7311.000	50.00 PK	74.00	-24.00	1.20 V	308	7.96	42.04
6	7311.000	37.50 AV	54.00	-16.50	1.20 V	308	-4.54	42.04


REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 965hPa	TESTED BY	Frank Liu


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.000	101.54 PK			1.63 H	10	71.20	30.34
2	*2462.000	90.61 AV			1.63 H	10	60.27	30.34
3	2483.800	67.17 PK	74.00	-6.83	1.52 H	13	36.74	30.43
4	2483.800	51.50 AV	54.00	-2.50	1.52 H	13	21.07	30.43
5	4904.000	52.04 PK	74.00	-21.96	1.51 H	204	16.44	35.60
6	4904.000	39.19 AV	54.00	-14.81	1.51 H	204	3.59	35.60
7	7356.000	50.80 PK	74.00	-23.20	1.42 H	0	8.64	42.16
8	7356.000	37.70 AV	54.00	-16.30	1.42 H	0	-4.46	42.16
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.000	103.47 PK			1.44 V	84	73.13	30.34
2	*2462.000	92.20 AV			1.44 V	84	61.86	30.34
3	2484.090	65.80 PK	74.00	-8.20	1.42 V	142	35.37	30.43
4	2484.090	50.83 AV	54.00	-3.17	1.42 V	142	20.40	30.43
5	4904.000	50.76 PK	74.00	-23.24	1.47 V	343	15.16	35.60
6	4904.000	37.37 AV	54.00	-16.63	1.47 V	343	1.77	35.60
7	7356.000	50.45 PK	74.00	-23.55	1.00 V	20	8.29	42.16
8	7356.000	37.36 AV	54.00	-16.64	1.00 V	20	-4.80	42.16

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.


RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE, CH1, HORIZONTAL)

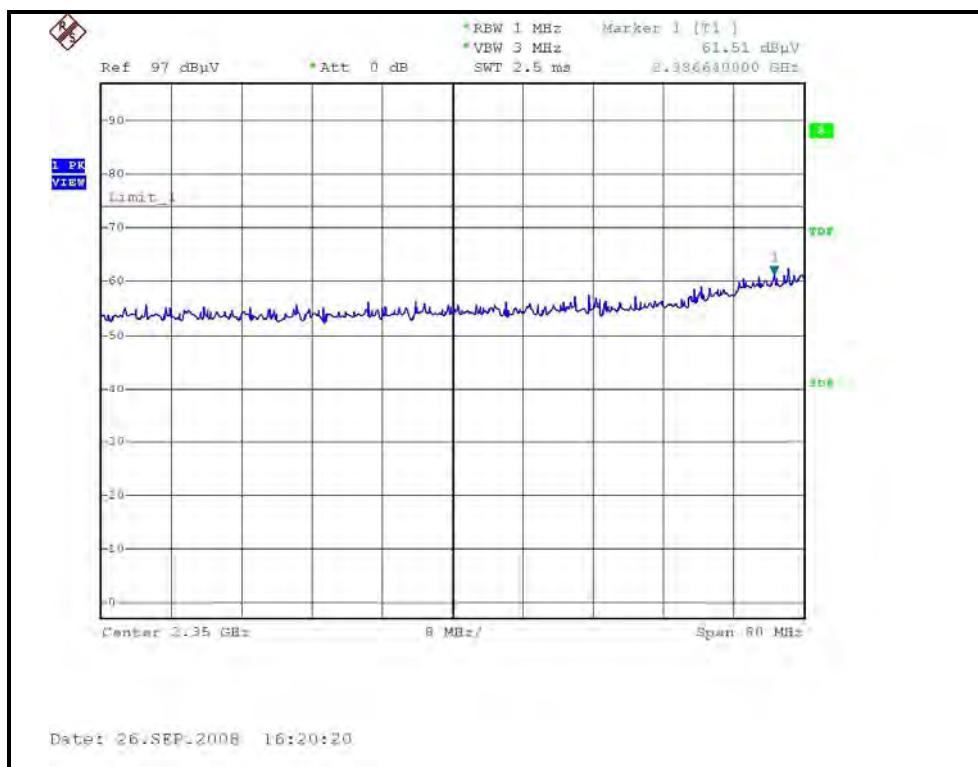


RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH1, VERTICAL)

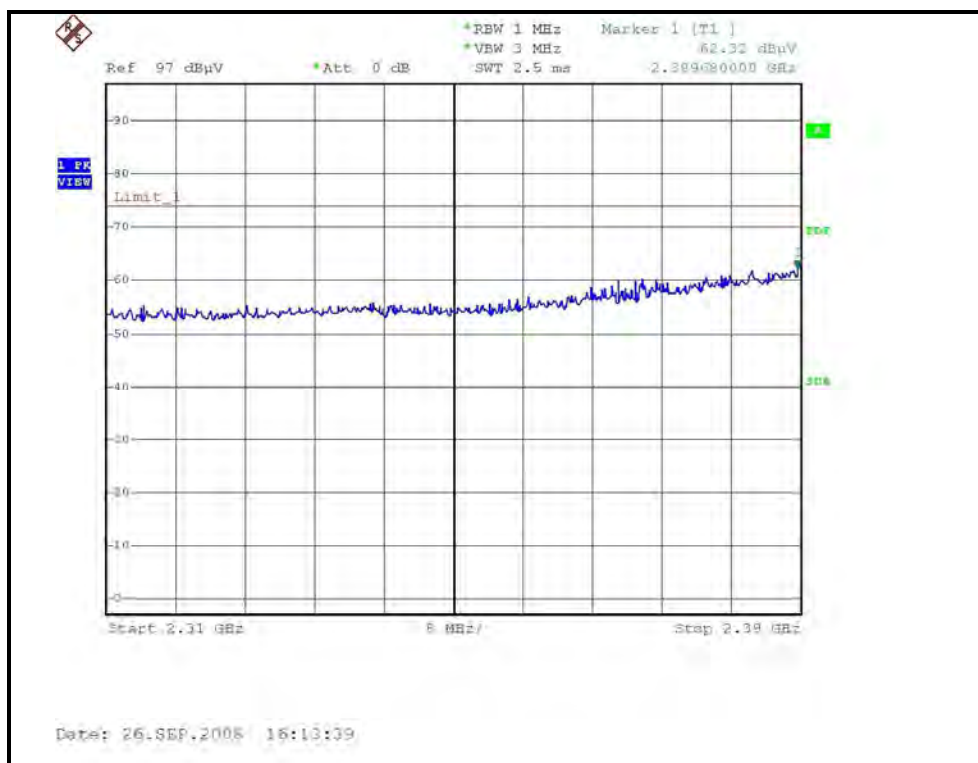

RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH7, HORIZONTAL)

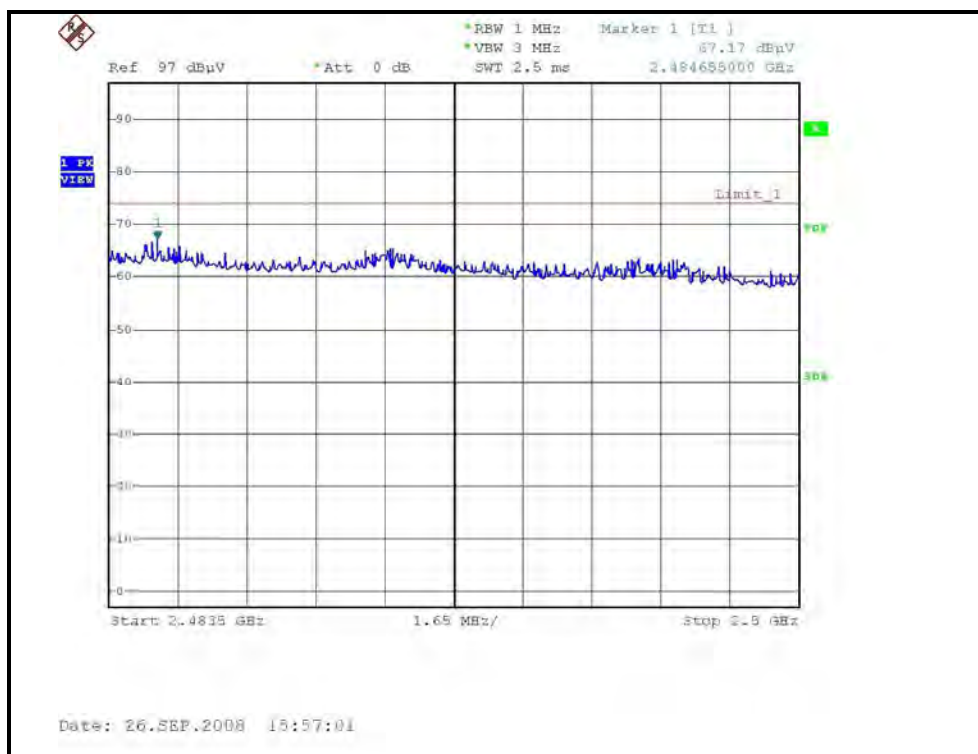

RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH7, VERTICAL)

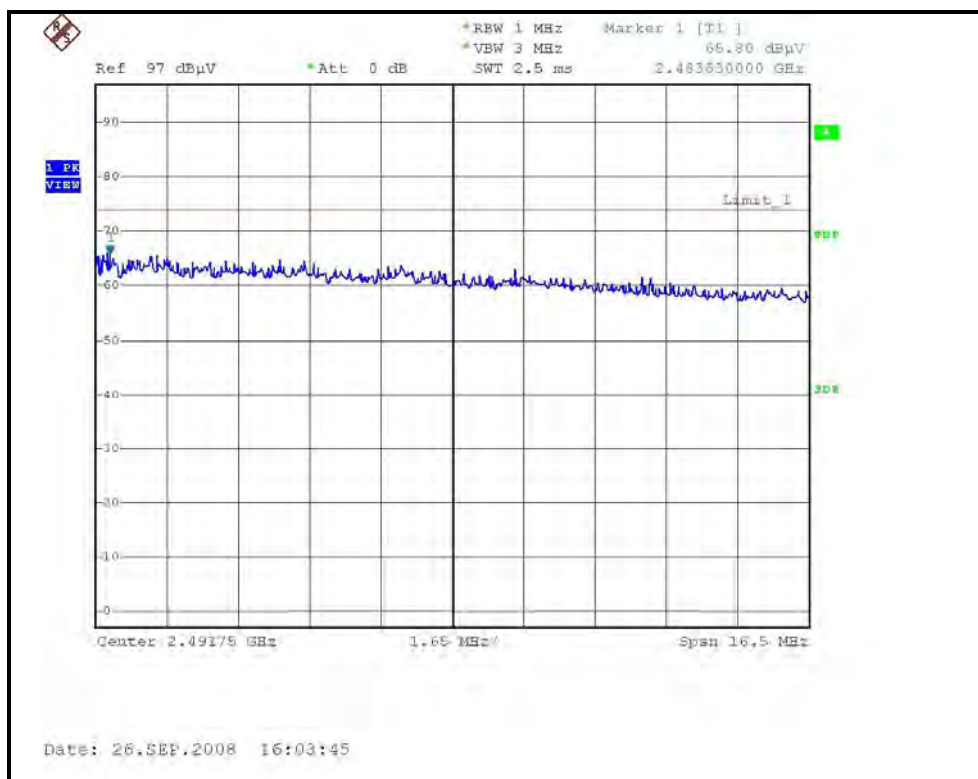

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 09, 2008	Aug. 08, 2009

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

802.11b DSSS MODULATION:


MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	12.14	0.5	PASS
6	2437	12.22	0.5	PASS
11	2462	12.20	0.5	PASS


CH1

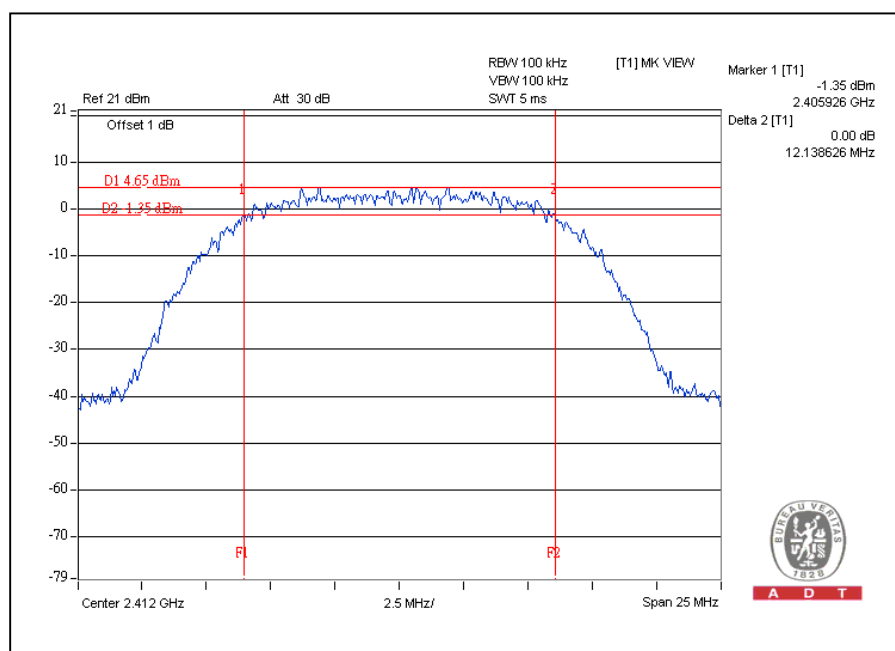

CH6

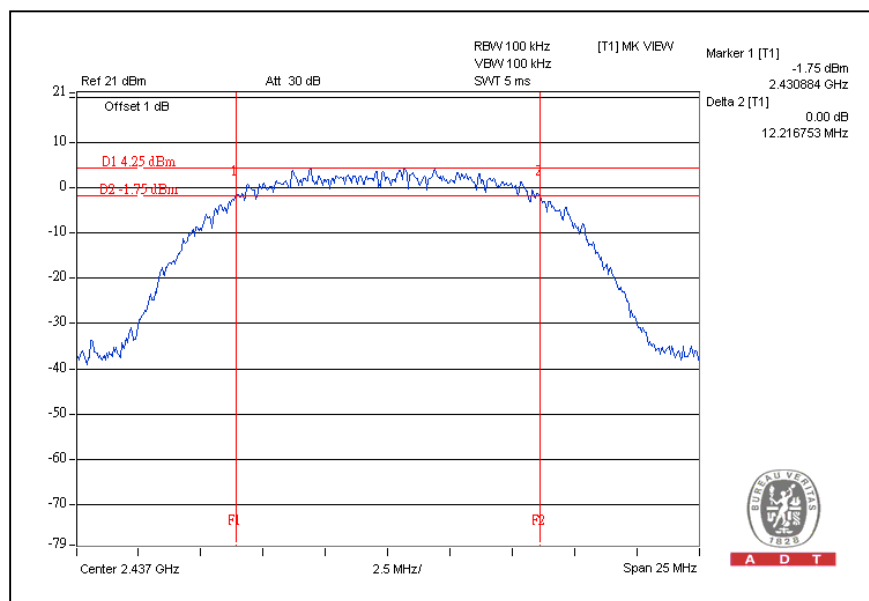

CH11

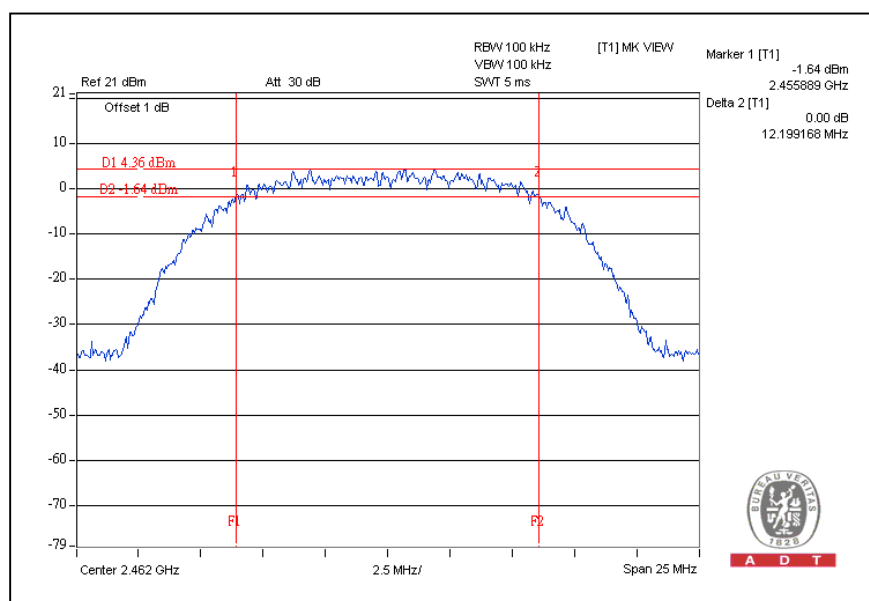


802.11g OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.63	0.5	PASS
6	2437	16.65	0.5	PASS
11	2462	16.59	0.5	PASS


CH1

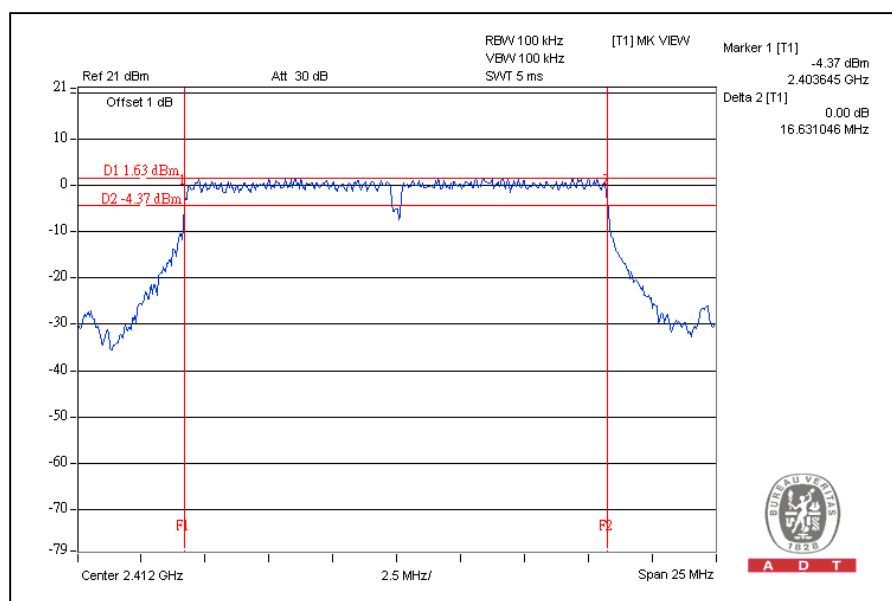

CH6

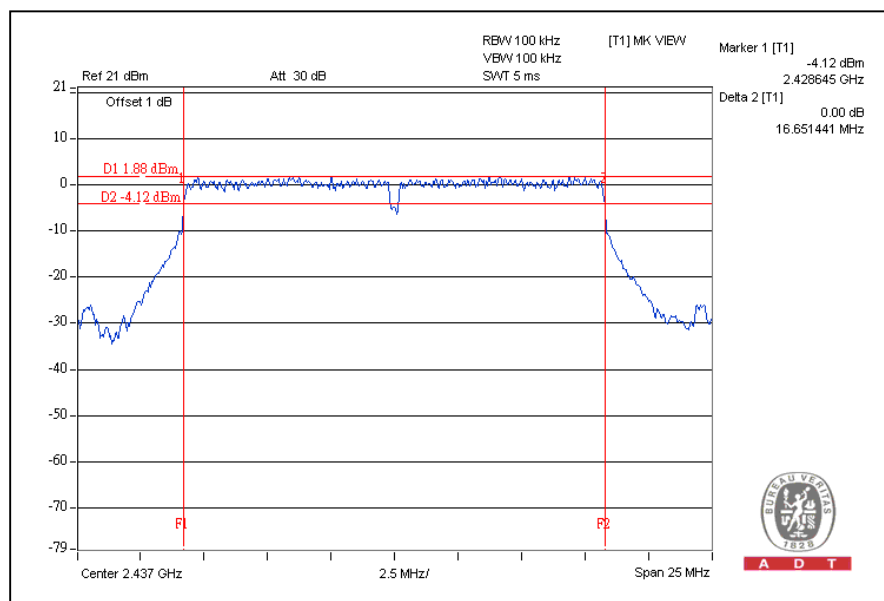

CH11

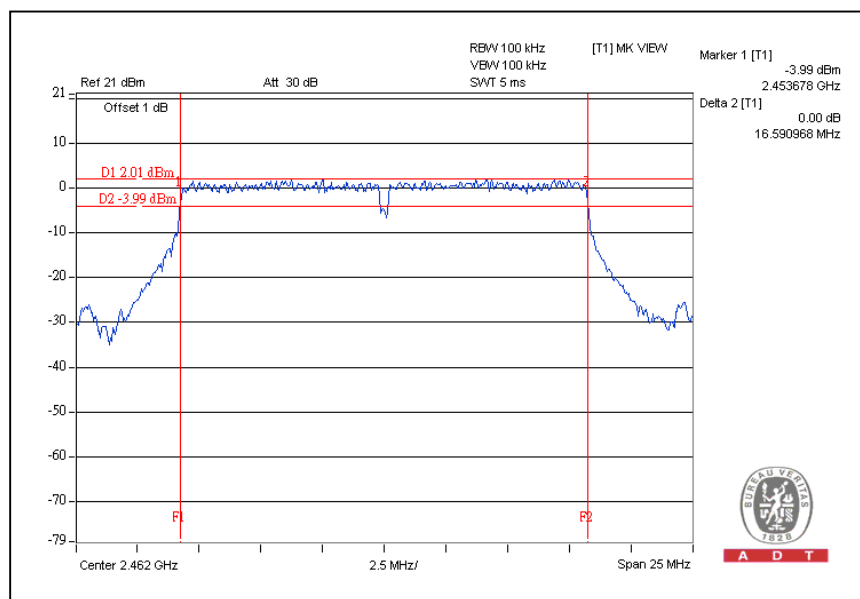


DRAFT 802.11n (20MHz) OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	13Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN(0)	CHAIN(1)		
1	2412	17.79	17.77	0.5	PASS
6	2437	17.78	17.71	0.5	PASS
11	2462	17.81	17.76	0.5	PASS


For Chain(0): CH1

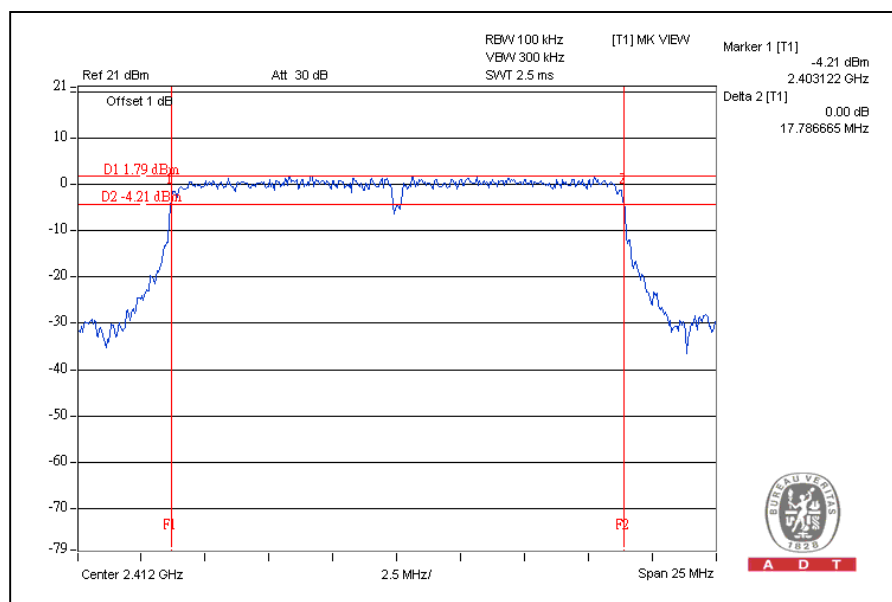


CH6

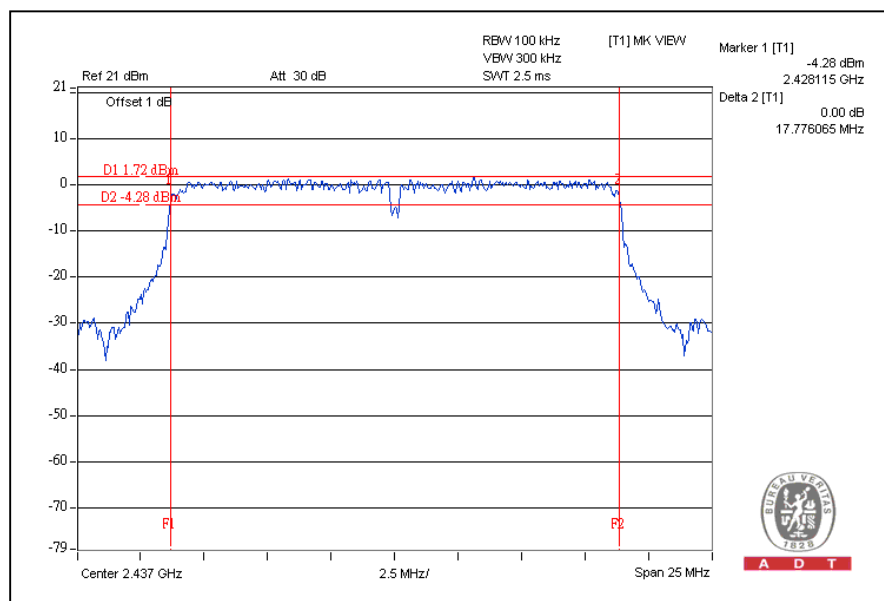


CH11

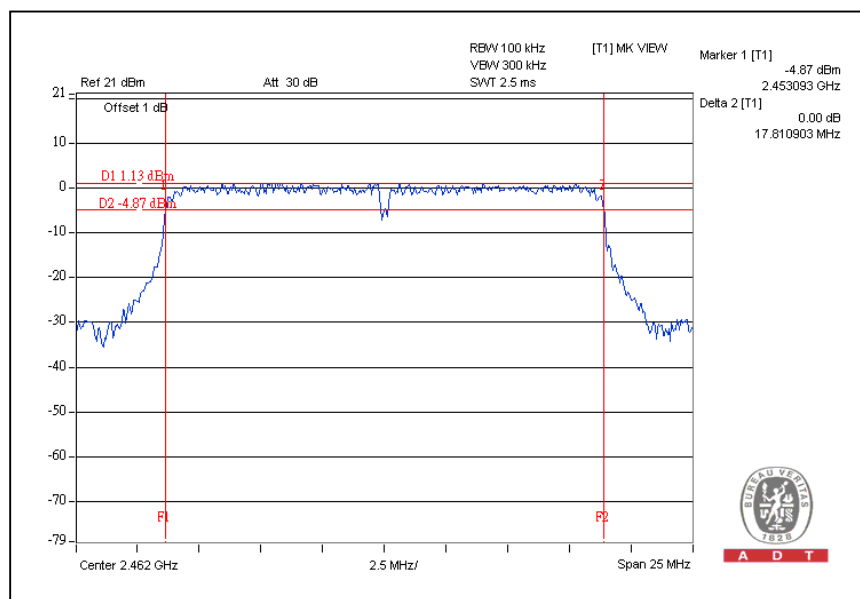


For CHAIN(1): CH1

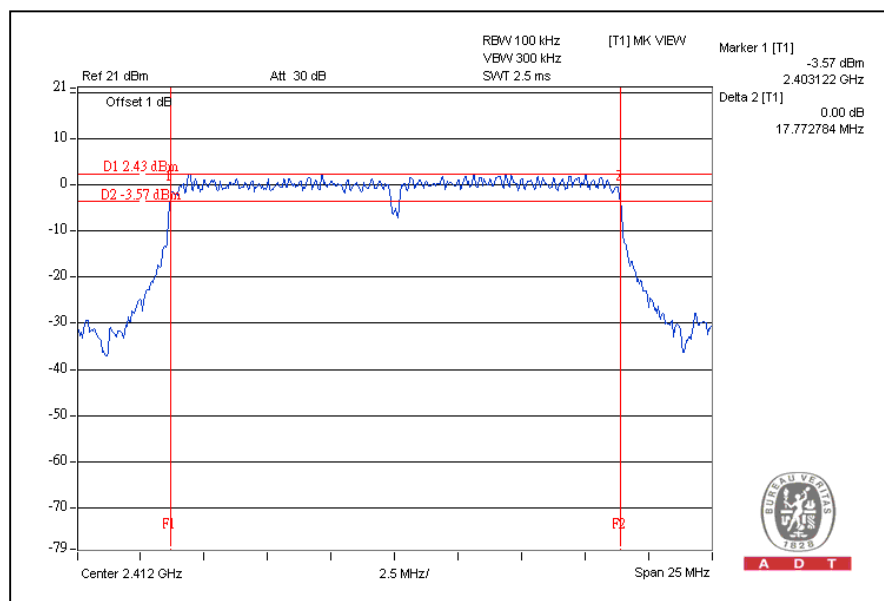

CH6

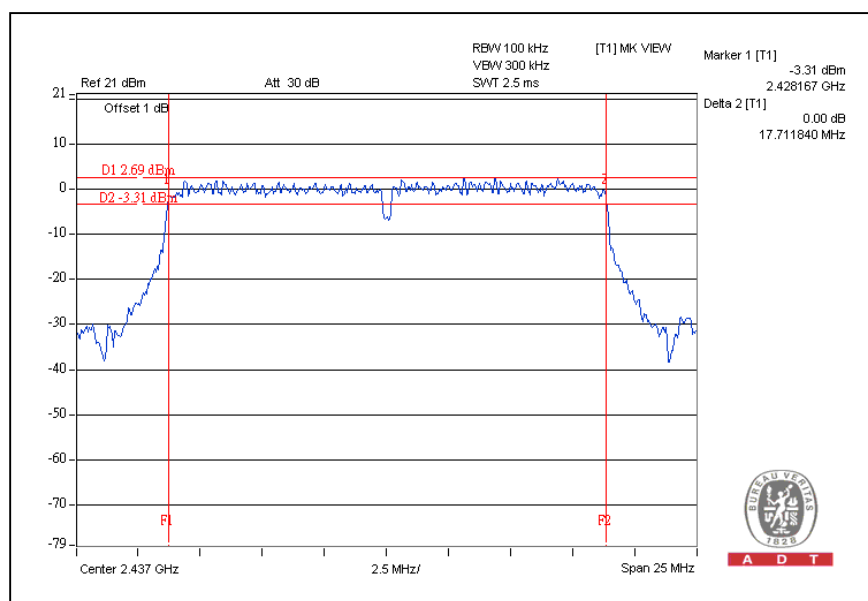

CH11

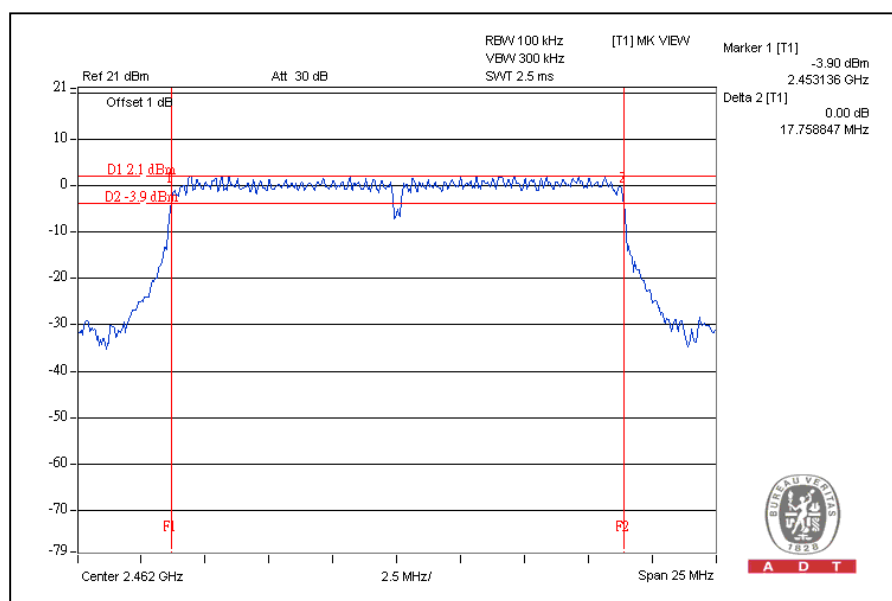


DRAFT 802.11n (40MHz) OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	27Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN(0)	CHAIN(1)		
1	2422	36.52	36.52	0.5	PASS
4	2437	36.52	36.50	0.5	PASS
7	2452	36.53	36.50	0.5	PASS


For Chain (0): CH1

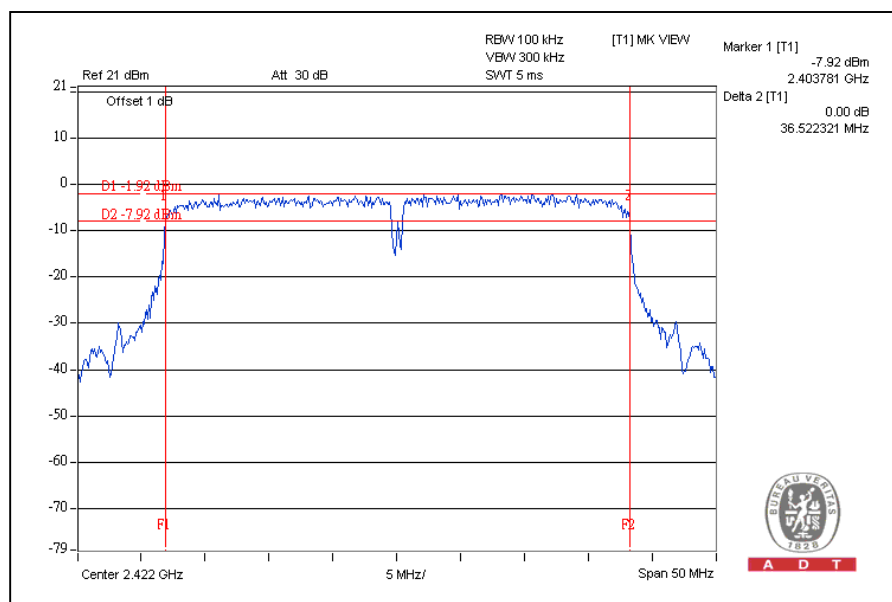


CH4

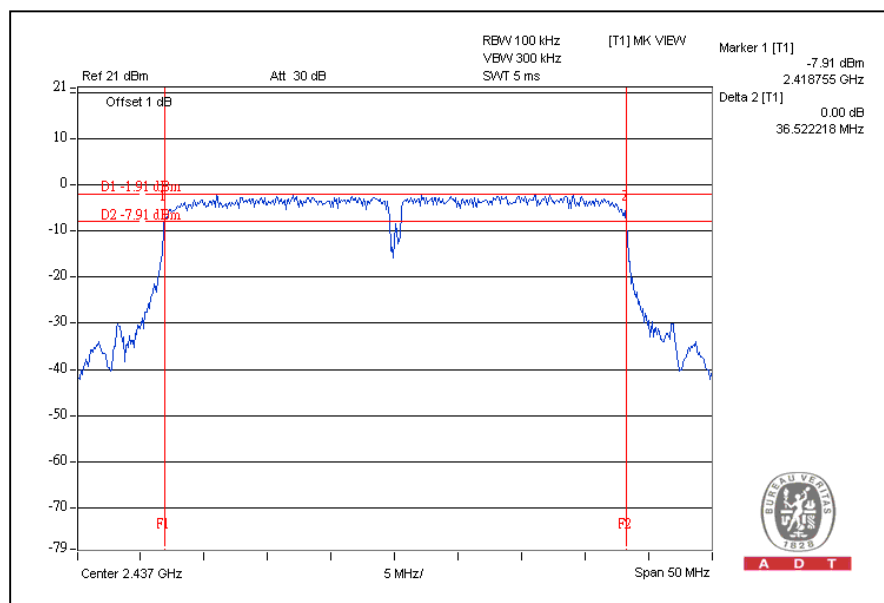


CH7

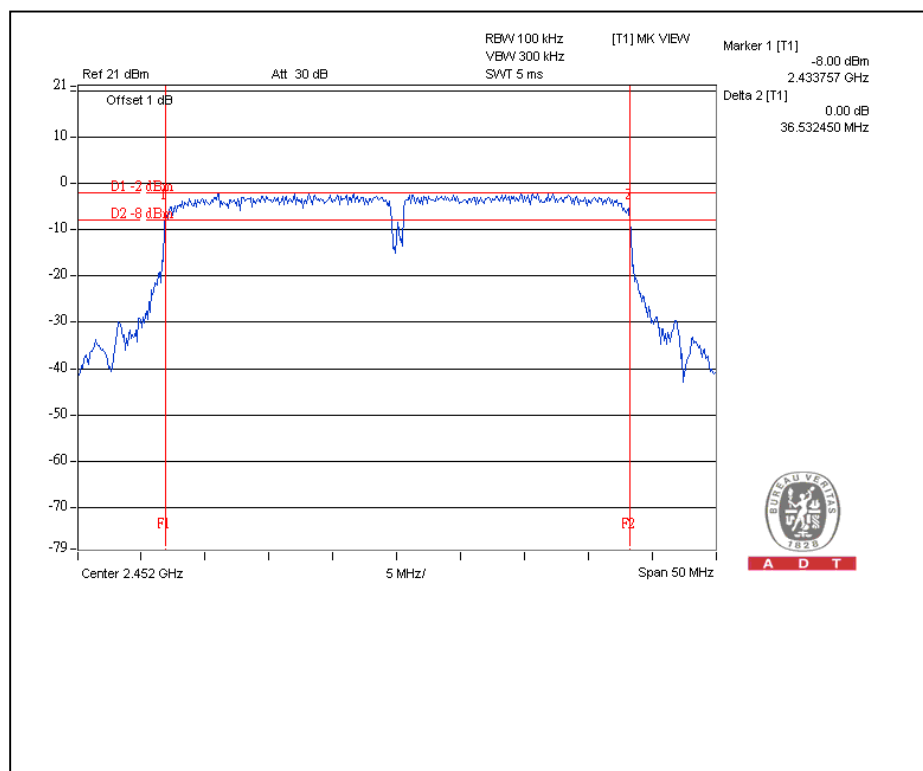


For Chain (1): CH1

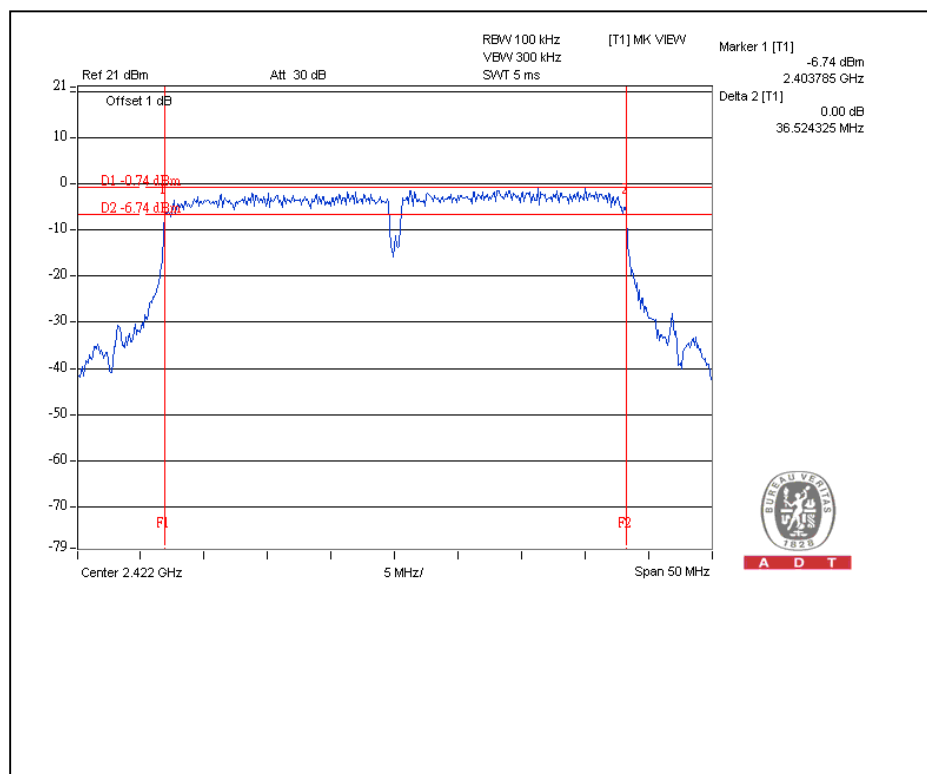

CH4

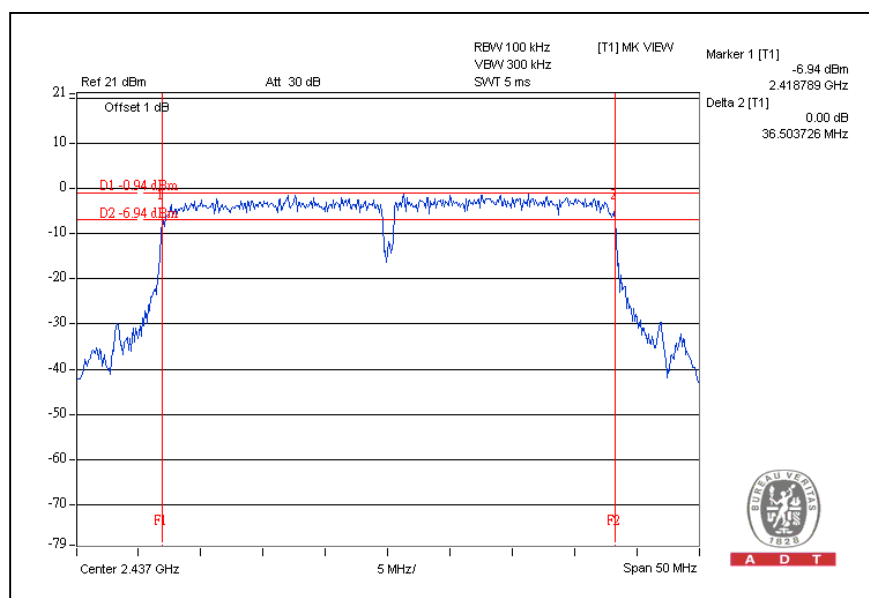

CH7

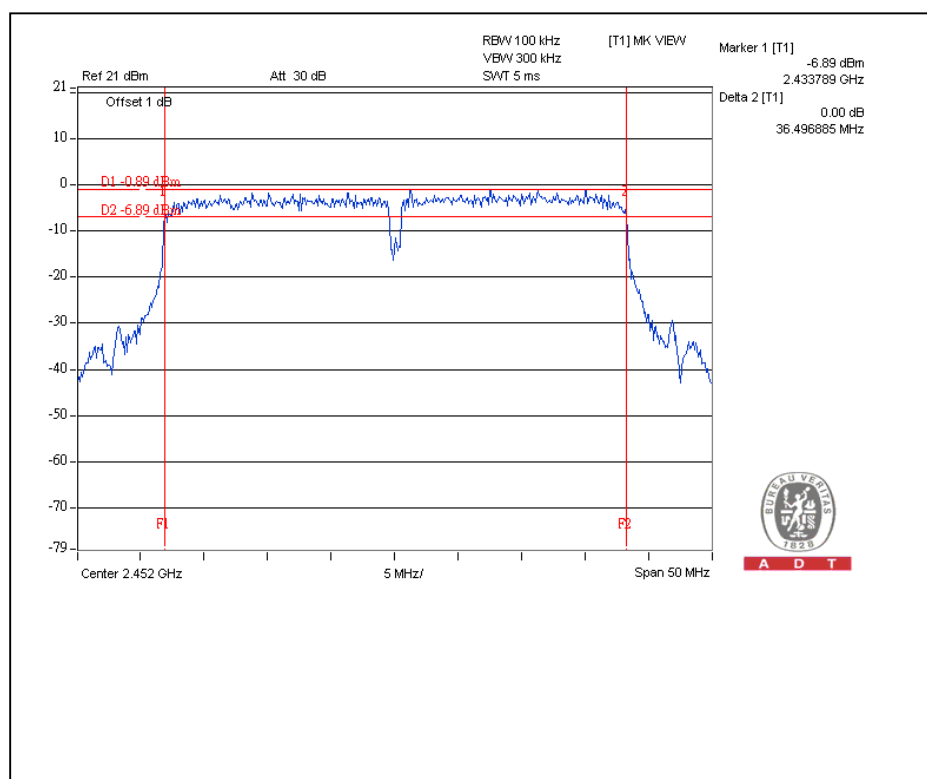

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 13, 2008	Aug. 12, 2009
Agilent SIGNAL GENERATOR	E8257C	MY43320668	Dec. 26, 2007	Dec. 25, 2008
Anritsu Power Meter	ML2495A	0824006	NA	NA
Pulse Power Sensor	MA2411B	0738172	NA	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. The transmitter output was connected to the power meter through an attenuator; the bandwidth of the fundamental frequency was measured with the power meter.
2. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

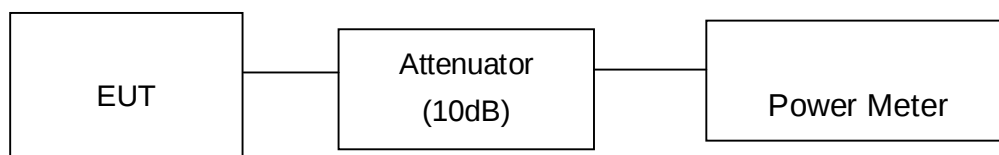

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

802.11b DSSS MODULATION:

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	103.514	20.15	30	PASS
6	2437	100.693	20.03	30	PASS
11	2462	103.992	20.17	30	PASS

802.11g OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	337.287	25.28	30	PASS
6	2437	340.408	25.32	30	PASS
11	2462	341.979	25.34	30	PASS

DRAFT 802.11n (20MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	13Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)		PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(0)	CHAIN(1)				
1	2412	336.512	318.420	25.27	25.03	654.932	28.16	30	PASS
6	2437	328.852	320.627	25.17	25.06	649.479	28.13	30	PASS
11	2462	328.095	327.341	25.16	25.15	655.436	28.17	30	PASS

DRAFT 802.11n (40MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	27Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)		PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(0)	CHAIN(1)				
1	2422	291.072	297.167	24.64	24.73	588.239	27.70	30	PASS
4	2437	299.226	296.483	24.76	24.72	595.709	27.75	30	PASS
7	2452	306.902	302.691	24.87	24.81	609.593	27.85	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 09, 2008	Aug. 08, 2009

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6


4.5.7 TEST RESULTS

802.11b DSSS MODULATION:


MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-8.31	8	PASS
6	2437	-8.68	8	PASS
11	2462	-8.56	8	PASS


CH1

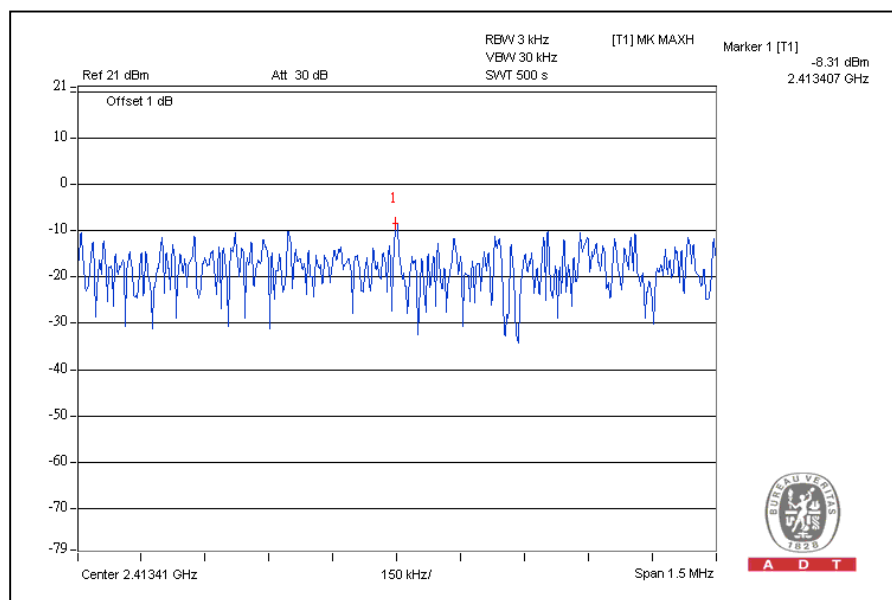

CH6

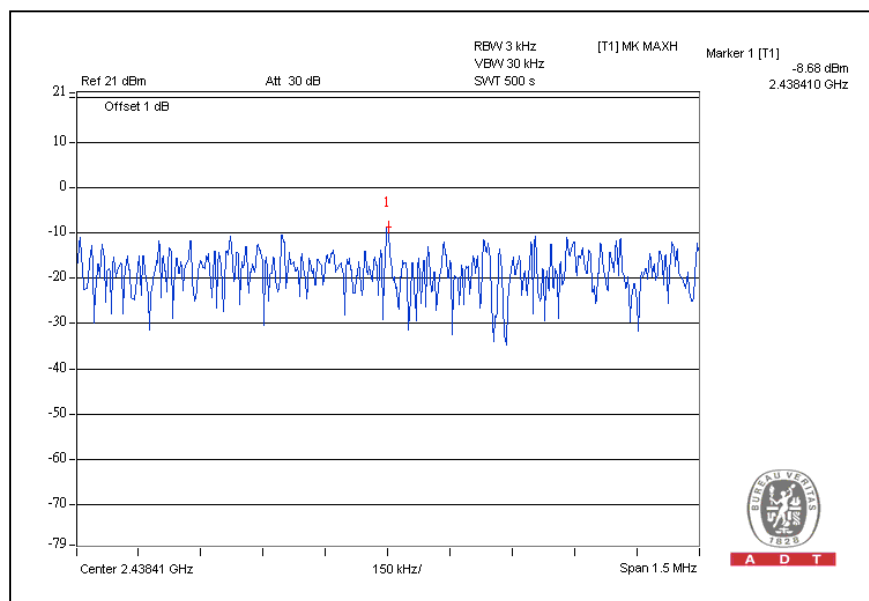

CH11

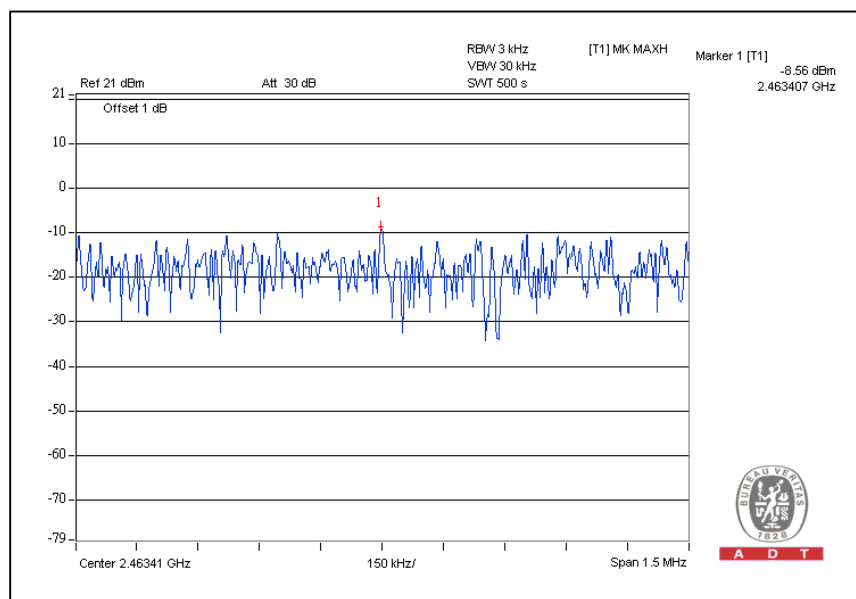


802.11g OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-12.32	8	PASS
6	2437	-12.30	8	PASS
11	2462	-12.09	8	PASS


CH1

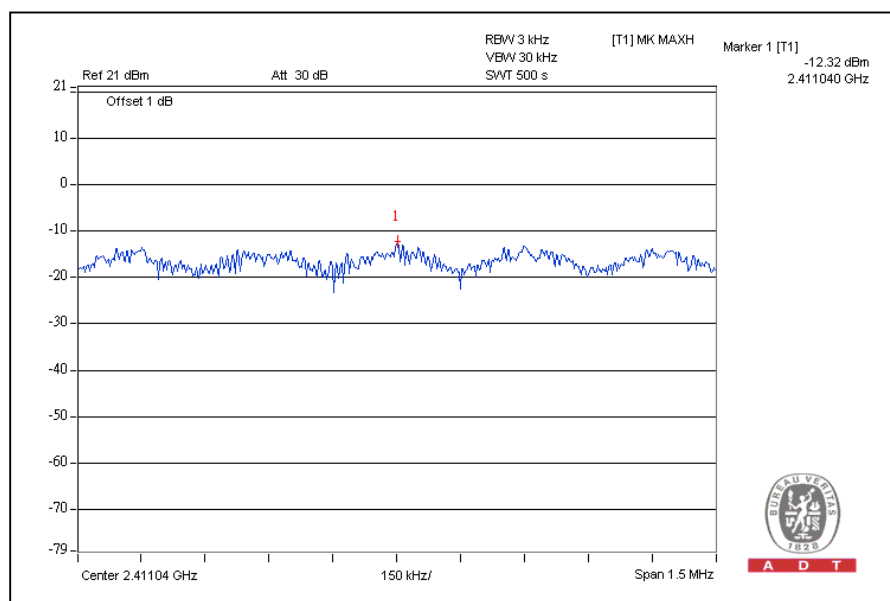

CH6

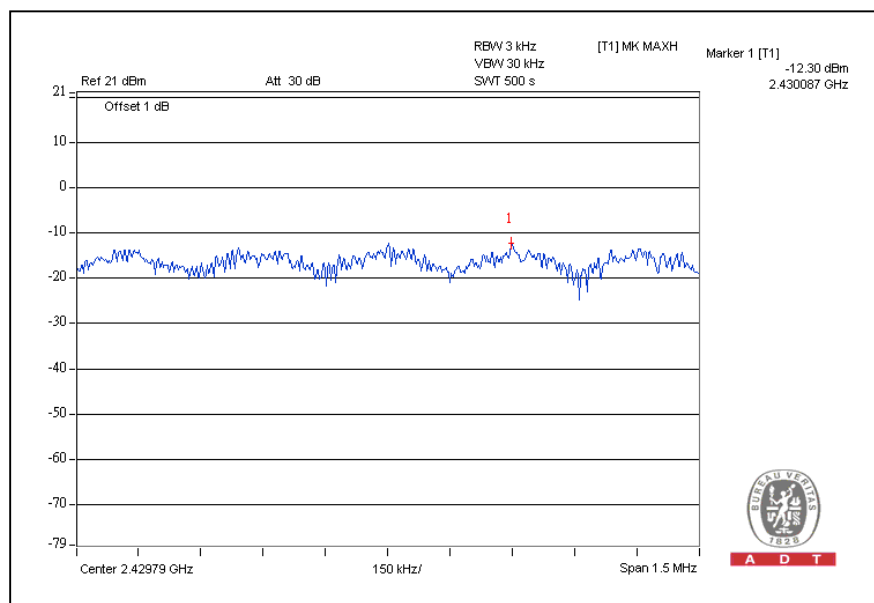

CH11

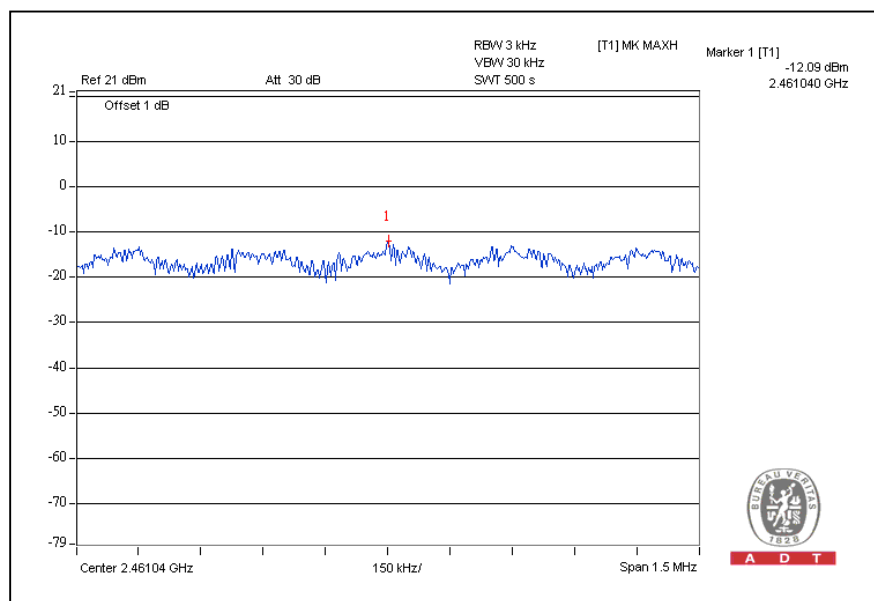


DRAFT 802.11n (20MHz) OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	13Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (mW)		RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(0)	CHAIN(1)				
1	2412	0.067	0.065	-11.73	-11.89	0.132	-8.79	8	PASS
6	2437	0.047	0.060	-13.29	-12.21	0.107	-9.71	8	PASS
11	2462	0.060	0.061	-12.24	-12.12	0.121	-9.17	8	PASS


For Chain(0): CH1

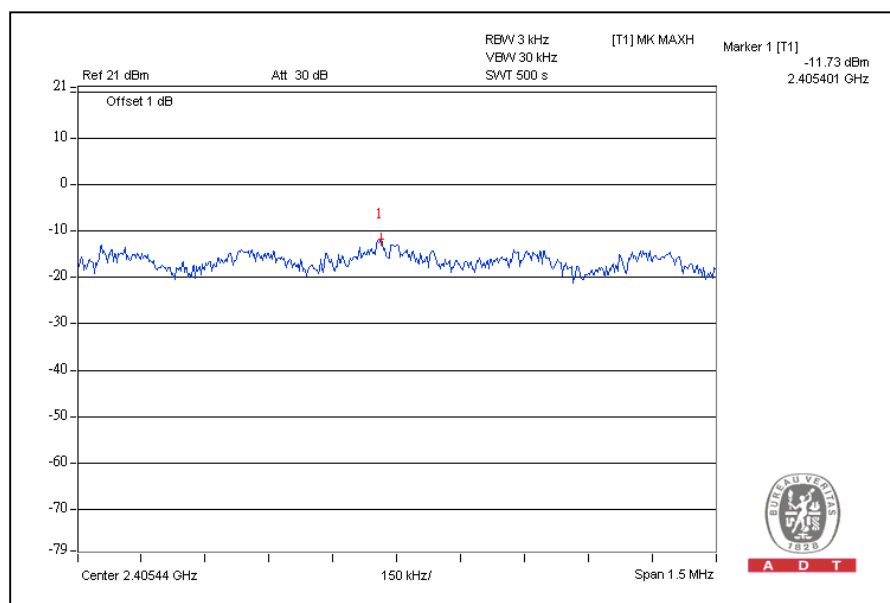


CH6

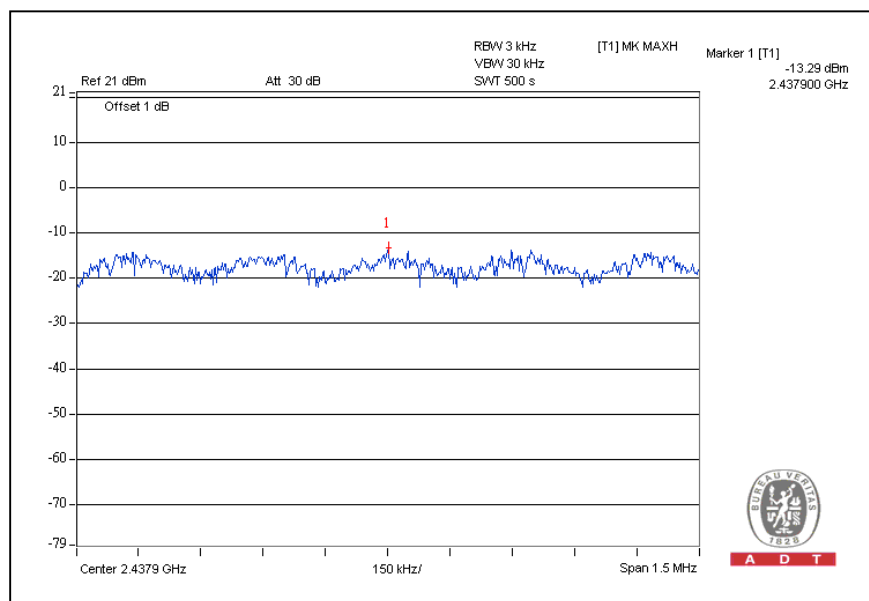


CH11

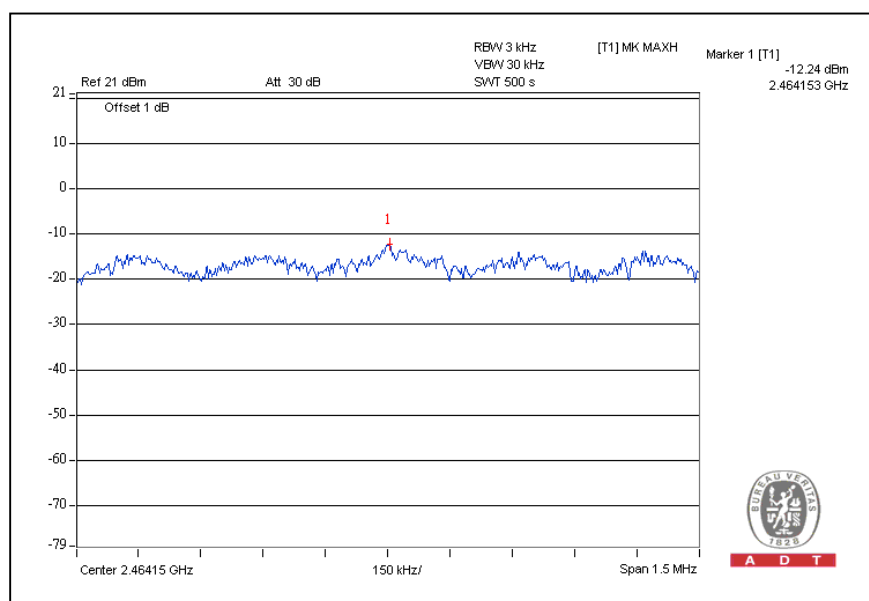


For Chain (1): CH1

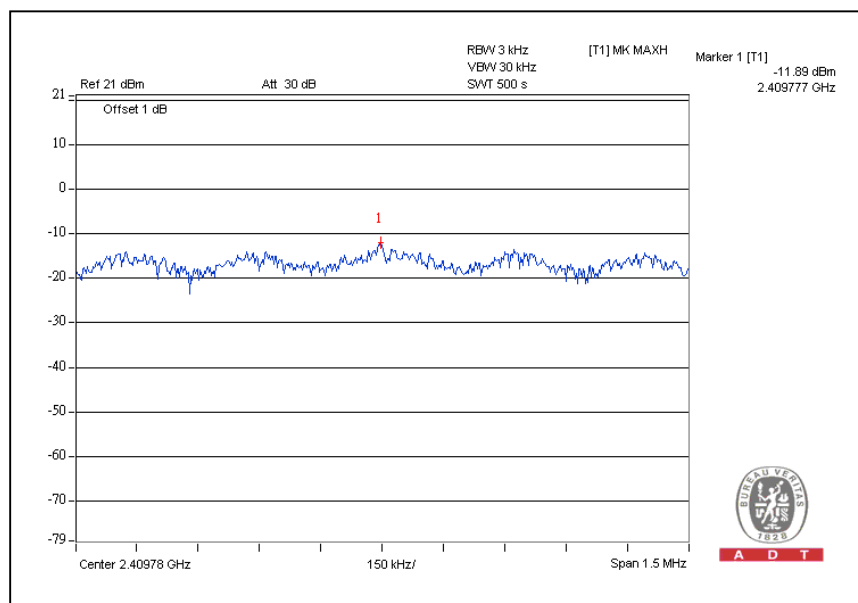

CH6

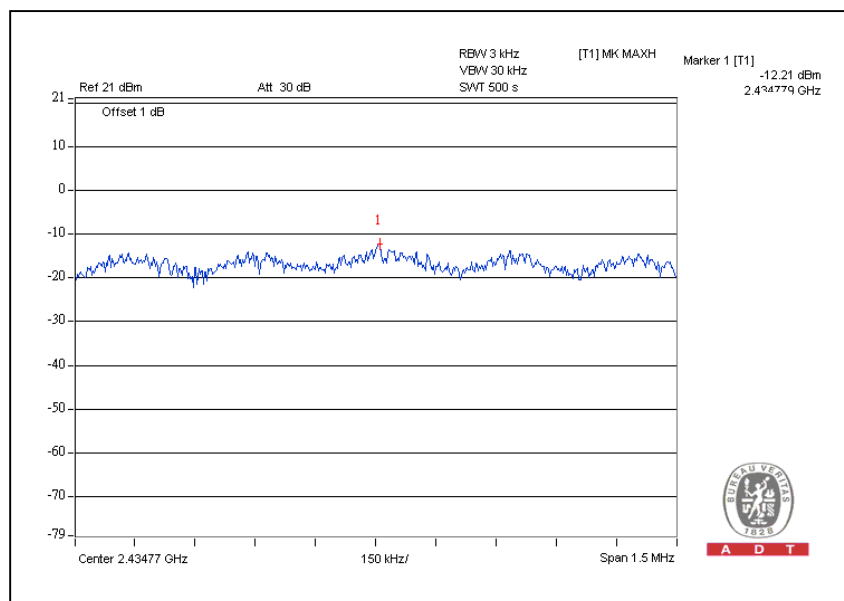

CH11

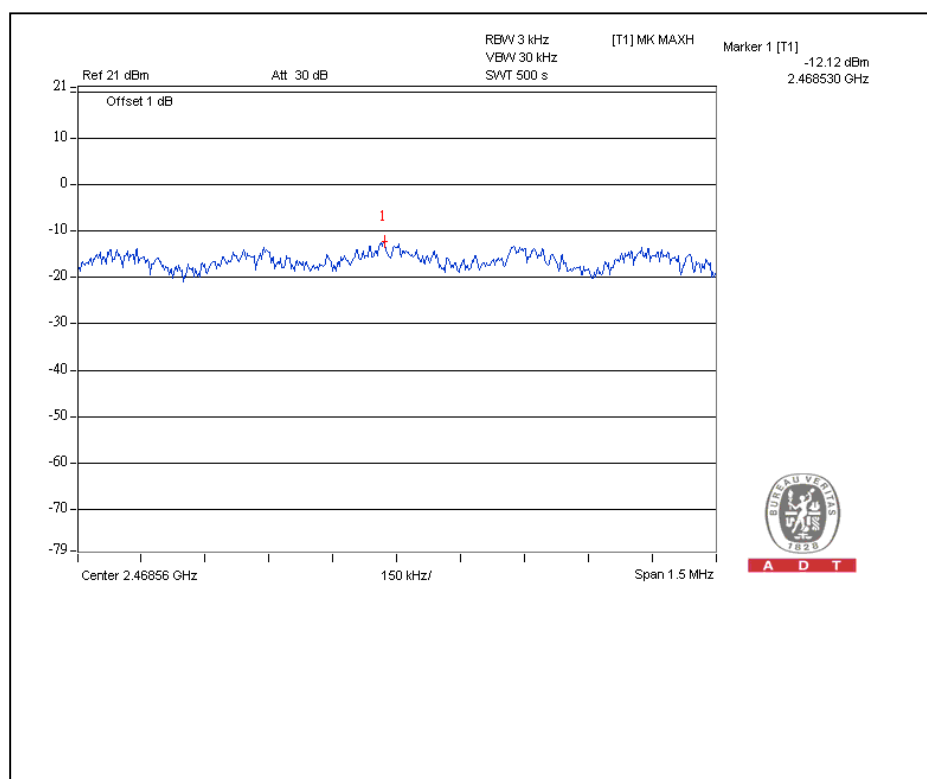


DRAFT 802.11n (40MHz) OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	27Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (mW)		RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(0)	CHAIN(1)				
1	2422	0.038	0.026	-14.19	-15.91	0.064	-11.94	8	PASS
4	2437	0.035	0.024	-14.55	-16.13	0.059	-12.29	8	PASS
7	2452	0.039	0.026	-14.11	-15.92	0.065	-11.87	8	PASS


For Chain (0): CH1

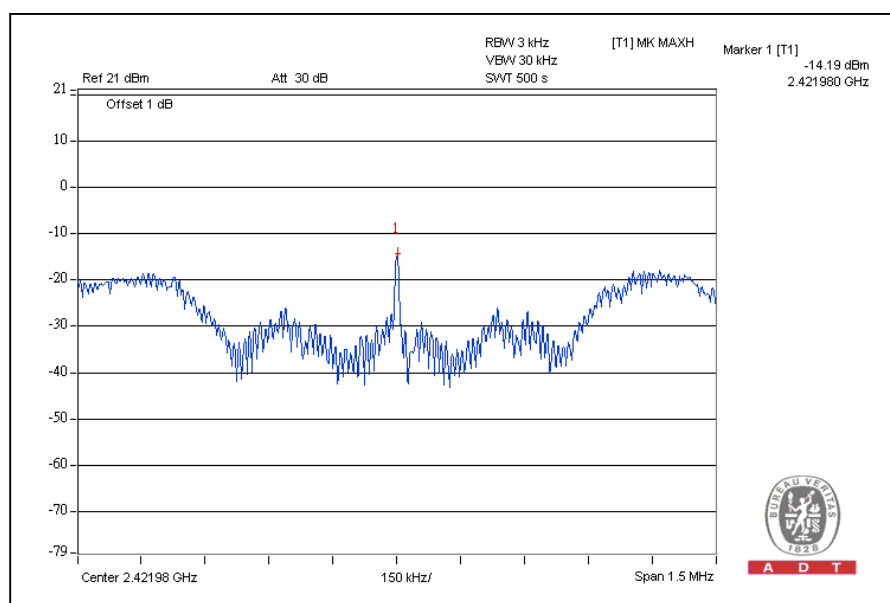


CH4

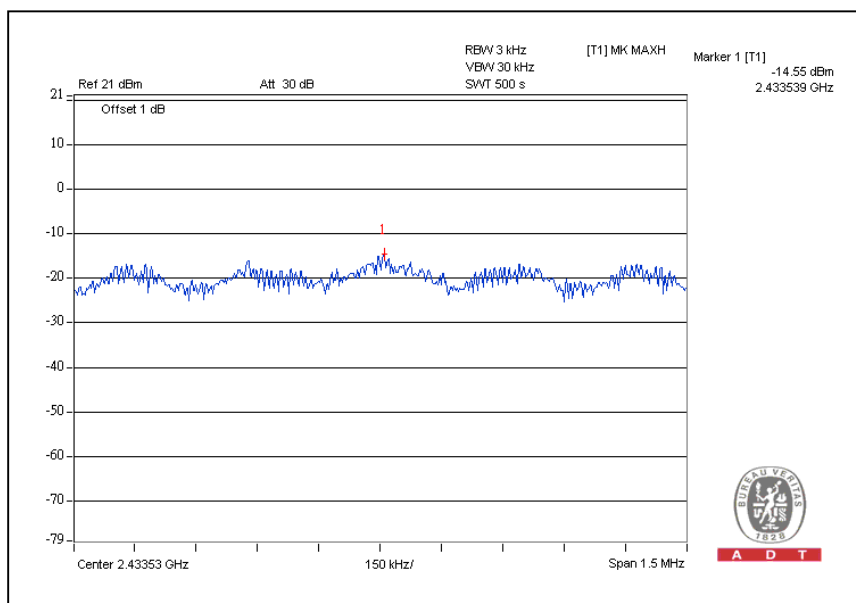


CH7

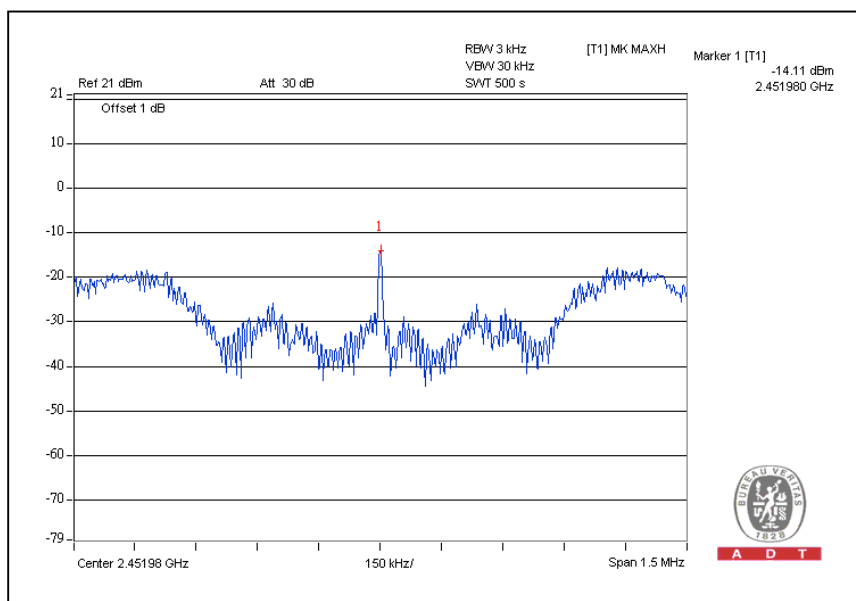


For Chain (1): CH1

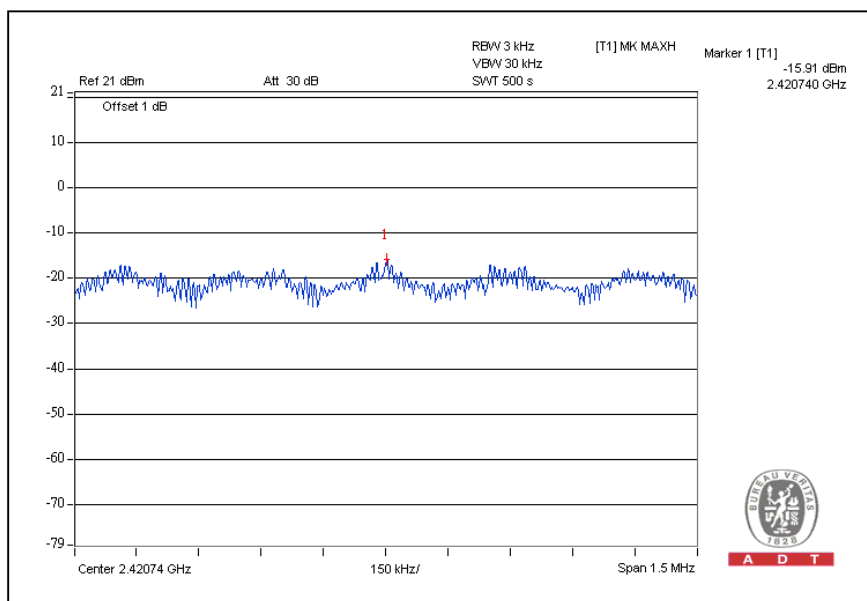

CH4

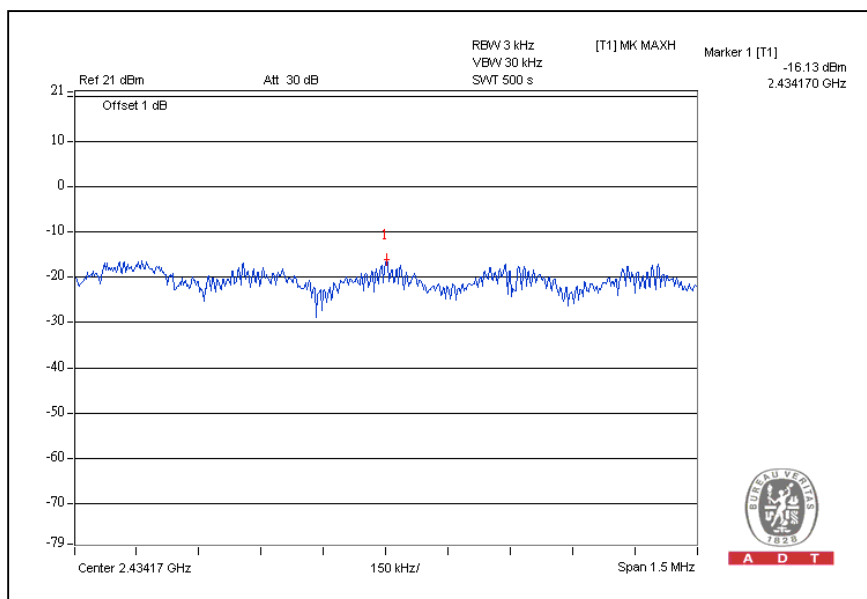

CH7

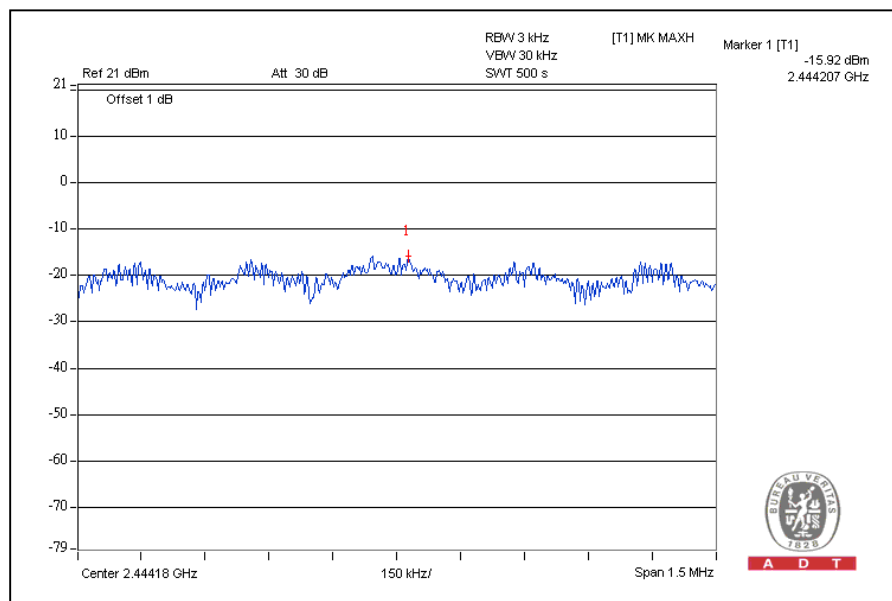

4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 09, 2008	Aug. 08, 2009

NOTE:

- 1.The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set RBW of spectrum analyzer to 100kHz and VBW of spectrum analyzer to 300kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges were measured and recorded.

The spectrum plots (RBW = 100kHz, VBW = 300kHz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION


Same as Item 4.3.6

4.6.6 TEST RESULTS


The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION:


CH1

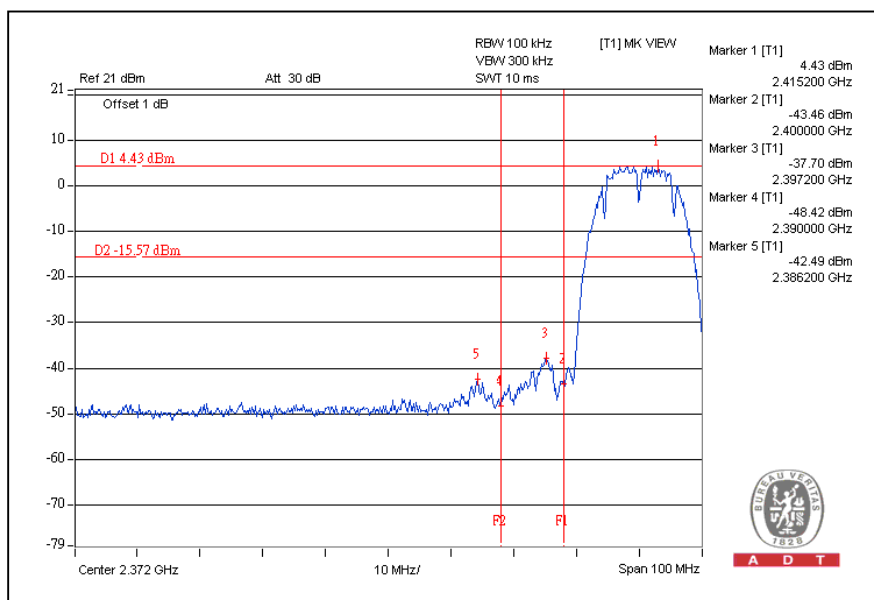


CH11

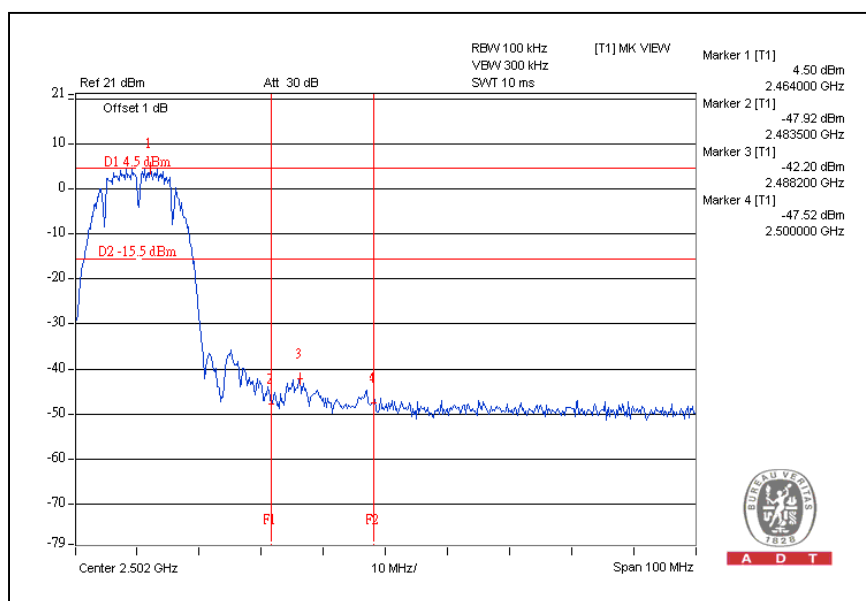

CH1

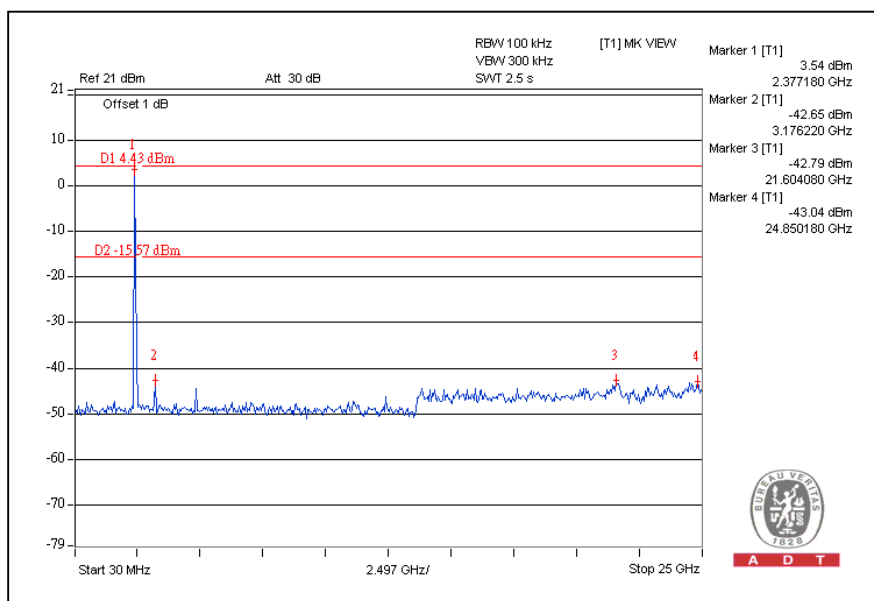


CH11

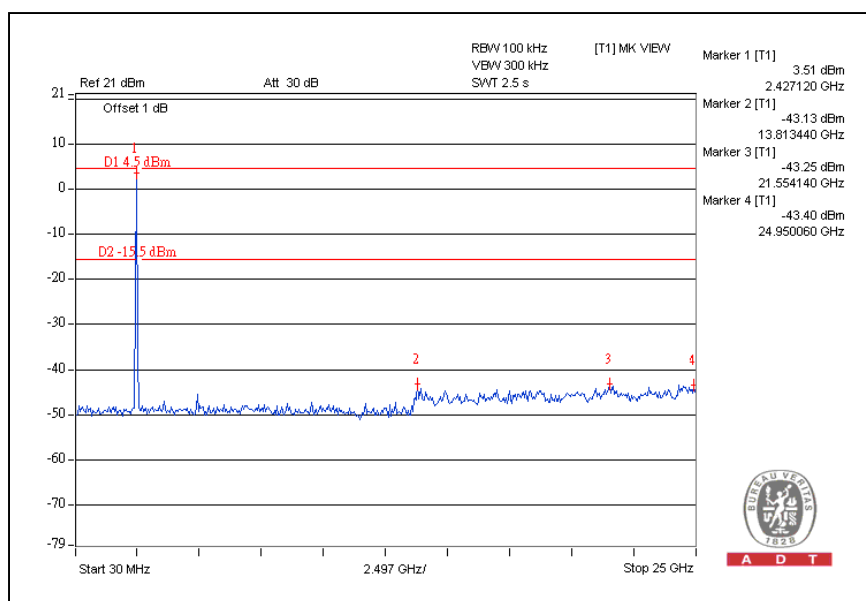


802.11g OFDM MODULATION:


CH1

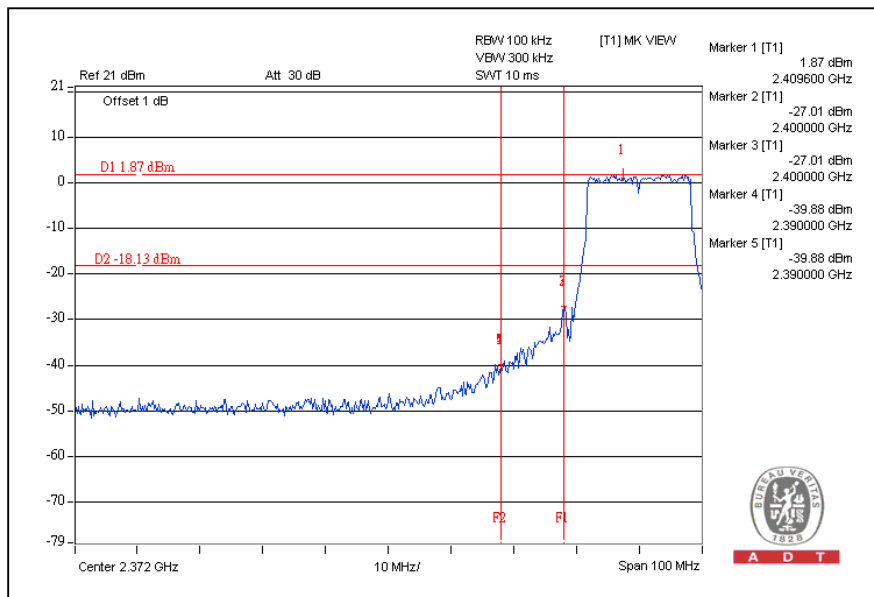


CH11

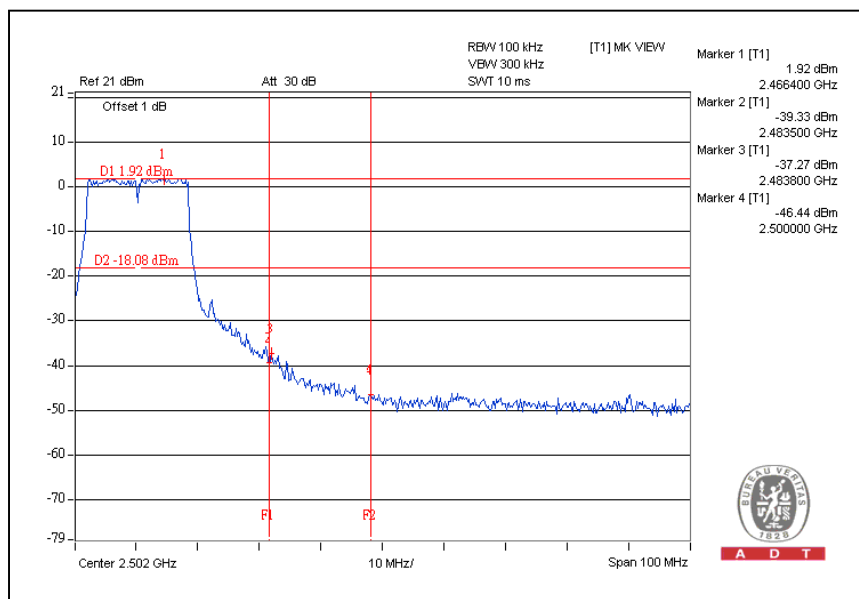

CH1

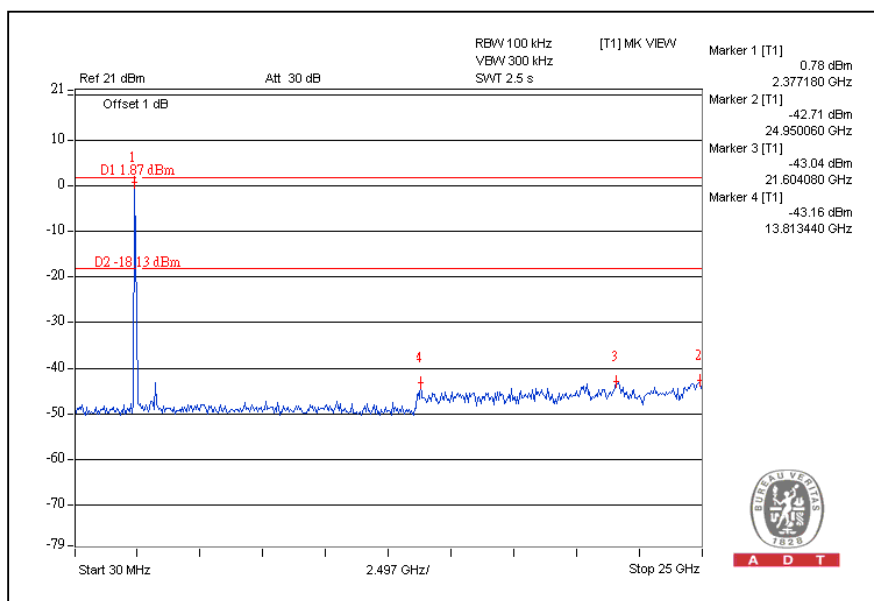


CH11

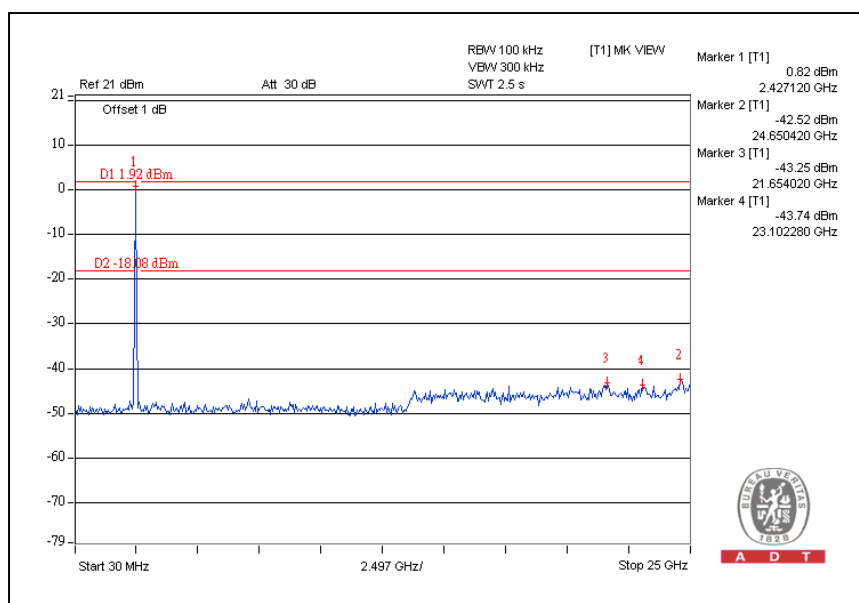


DRAFT 802.11n (20MHz) OFDM MODULATION:


For Chain (0):CH1

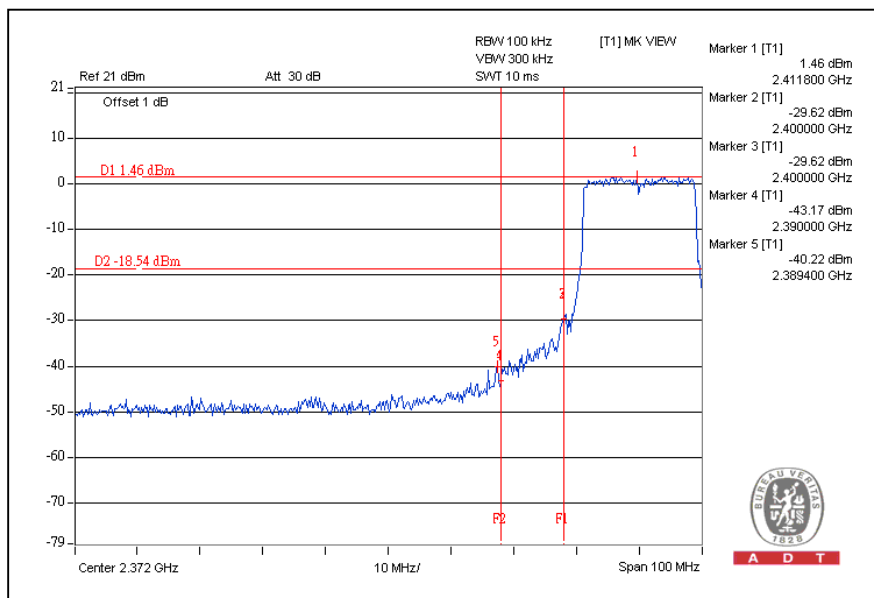


CH11

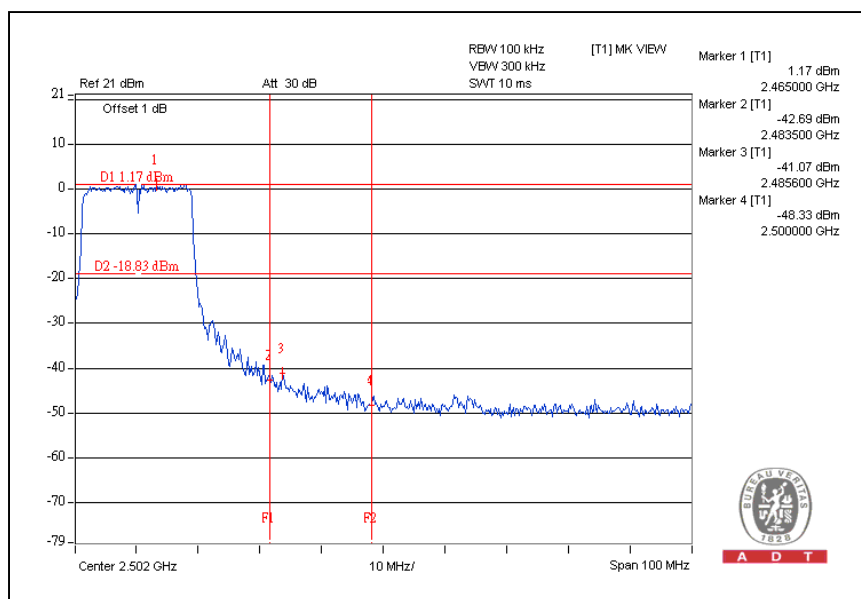


CH1

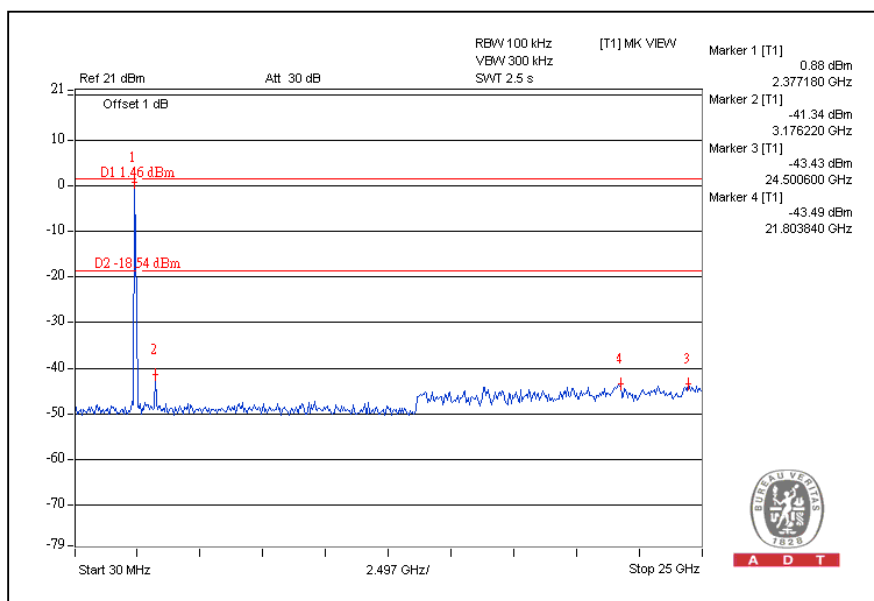


CH11

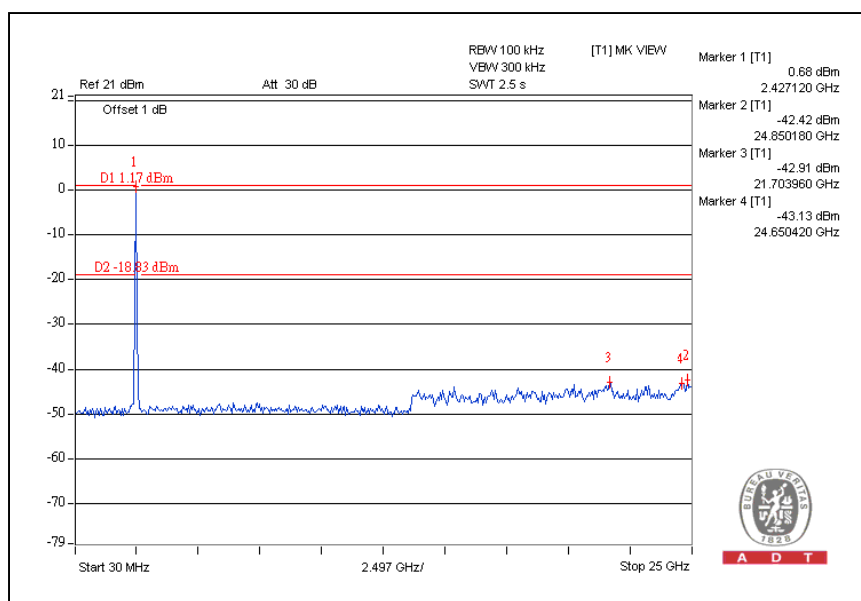


For Chain (1):CH1

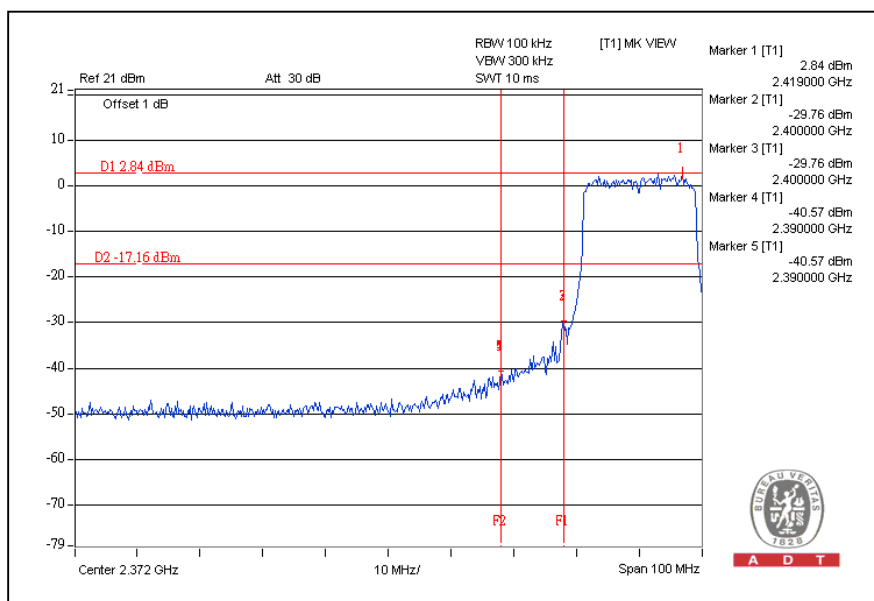


CH11

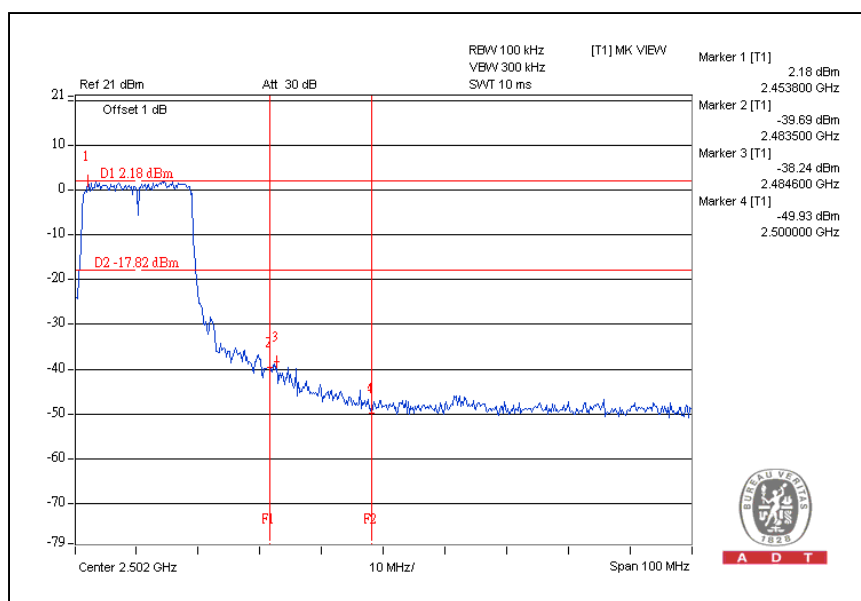


CH1

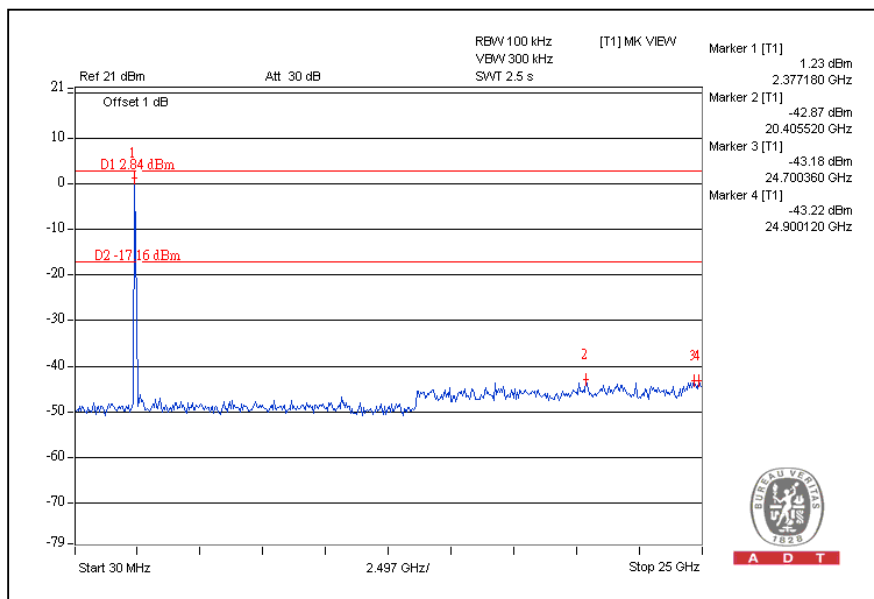


CH11

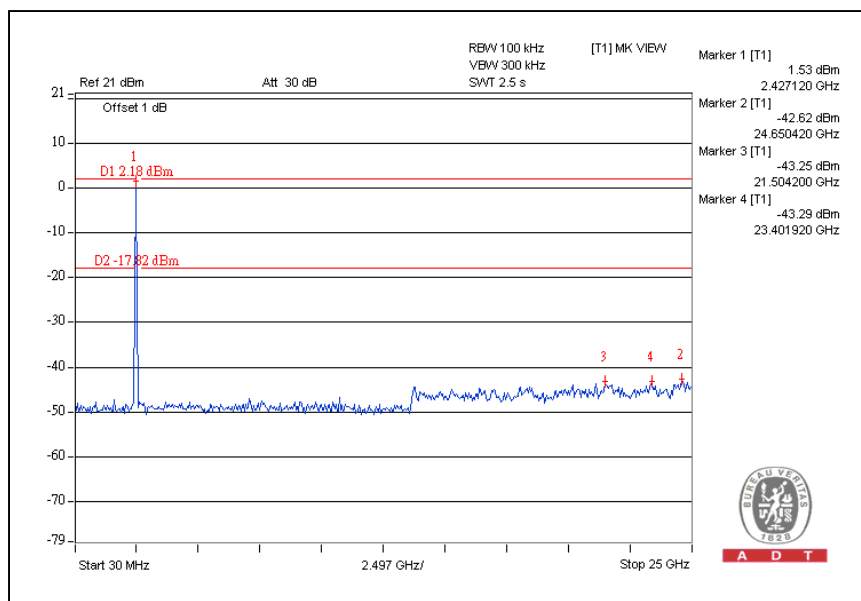


DRAFT 802.11n (40MHz) OFDM MODULATION: For Chain (0):CH1

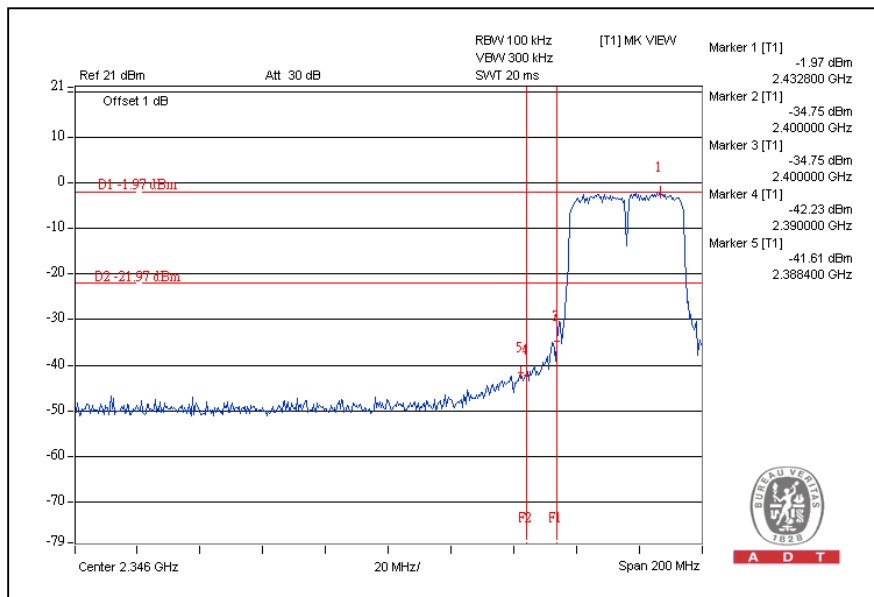


CH7

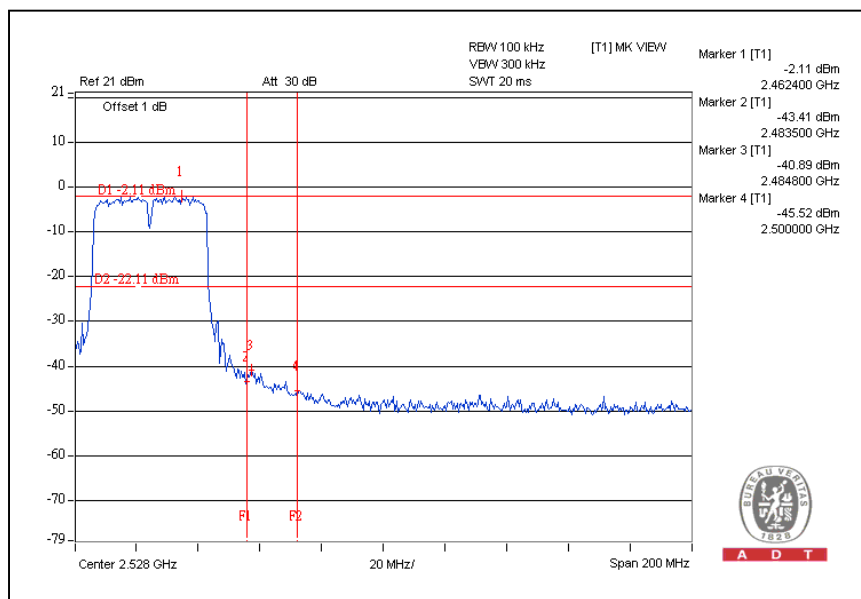


CH1

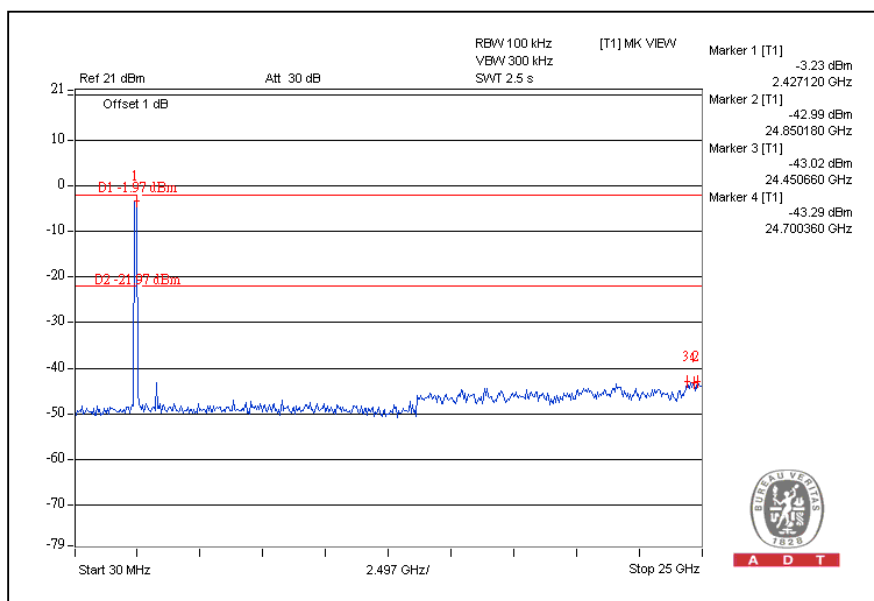


CH7

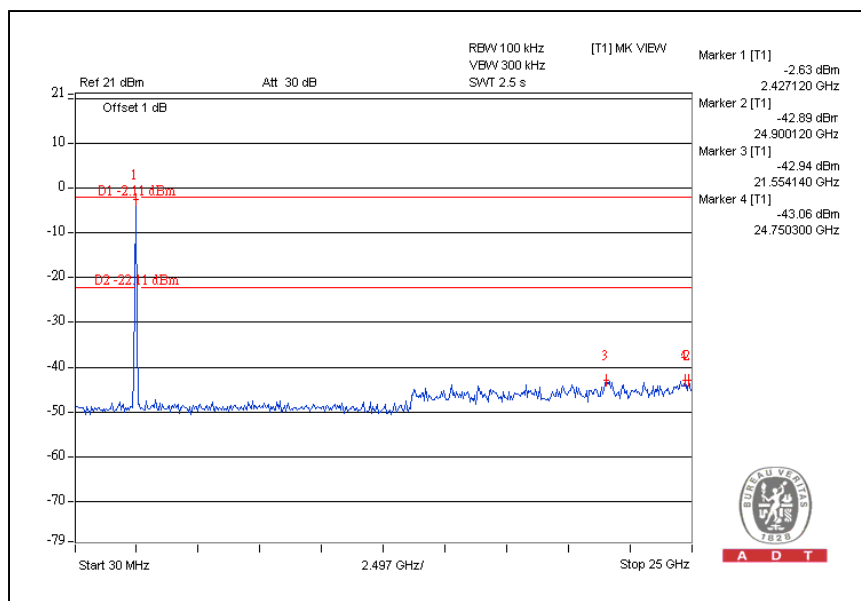


For Chain (1):CH1

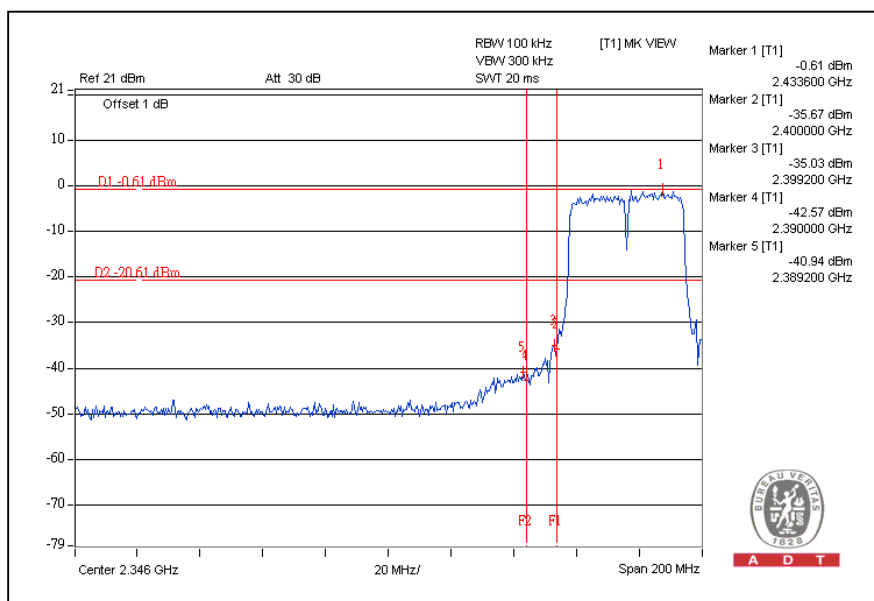


CH7

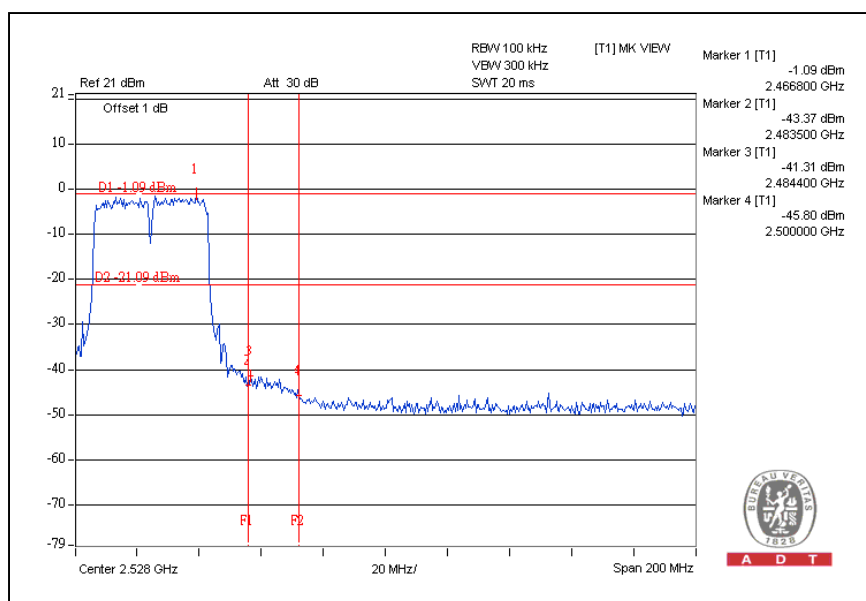

CH1

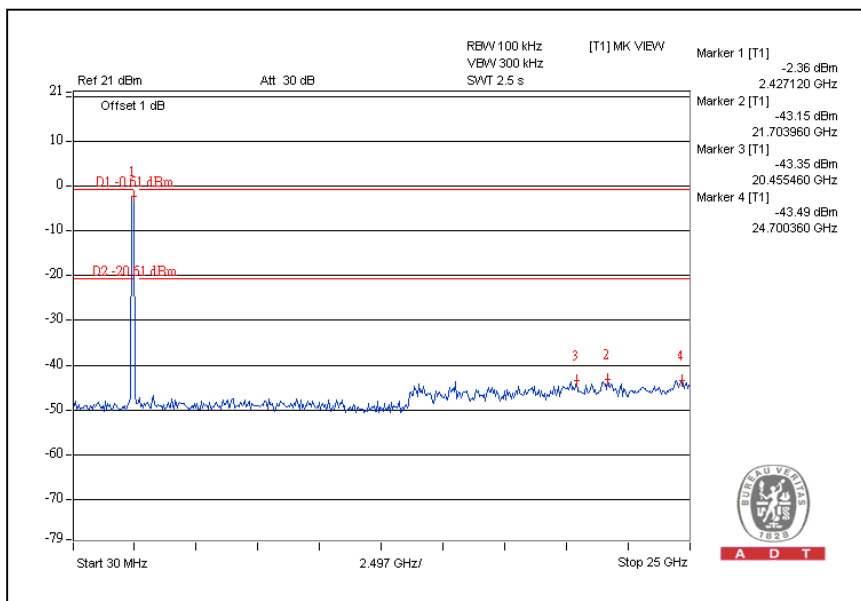

CH7

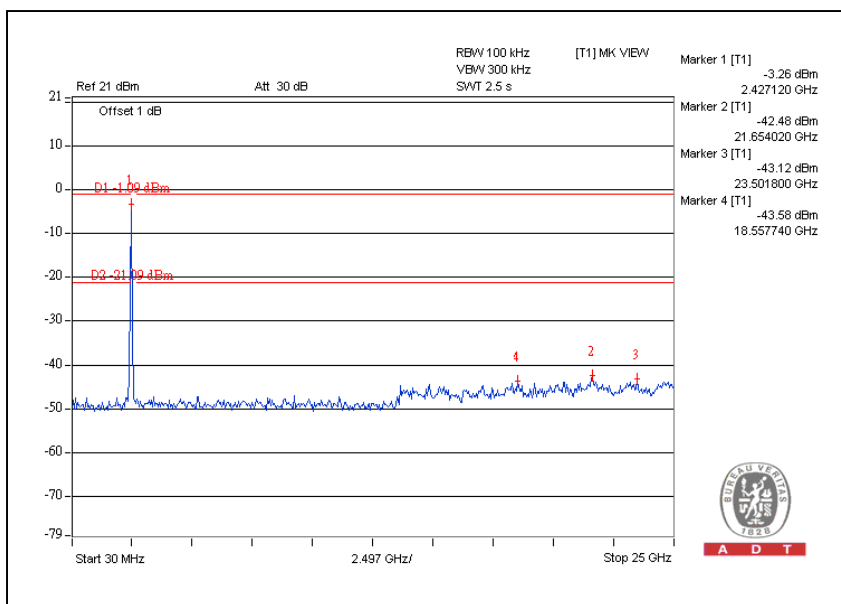

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

There two antennas provided to this EUT, please refer to the following table:

Transmitter Circuit	Antenna Type	For 2.4GHz Gain (dBi)	For 5.15~5.25GHz Gain (dBi)	For 5.25~5.47GHz Gain (dBi)	For 5.47~5.725GHz Gain (dBi)	For 5.725~5.85GHz Gain (dBi)	Antenna Connector
Chain(0)	PCB	-1.98	-0.85	-0.61	0.6	0.57	NA
Chain(1)	PCB	-2.46	-0.51	0.83	1.07	1.08	NA

5. TEST TYPES AND RESULTS (802.11a, 5725~5850MHz Band)

5.1 CONDUCTED EMISSION MEASUREMENT

5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	847124/029	Feb. 29, 2008	Feb. 28, 2009
Line-Impedance Stabilization Network(for EUT)	ENV-216	100071	Nov. 27, 2007	Nov. 26, 2008
Line-Impedance Stabilization Network(for Peripheral)	ESH3-Z5	848773/004	Nov. 09, 2007	Nov. 08, 2008
RF Cable (JYEBAO)	5DFB	COBCAB-001	July 24, 2008	July 23, 2009
50 ohms Terminator	50	3	Nov. 16, 2007	Nov. 15, 2008
Software	ADT_Cond_V7.3.2	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. B.
3. The VCCI Con B Registration No. is C-2193.


5.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) were not recorded.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation

5.1.5 TEST SETUP

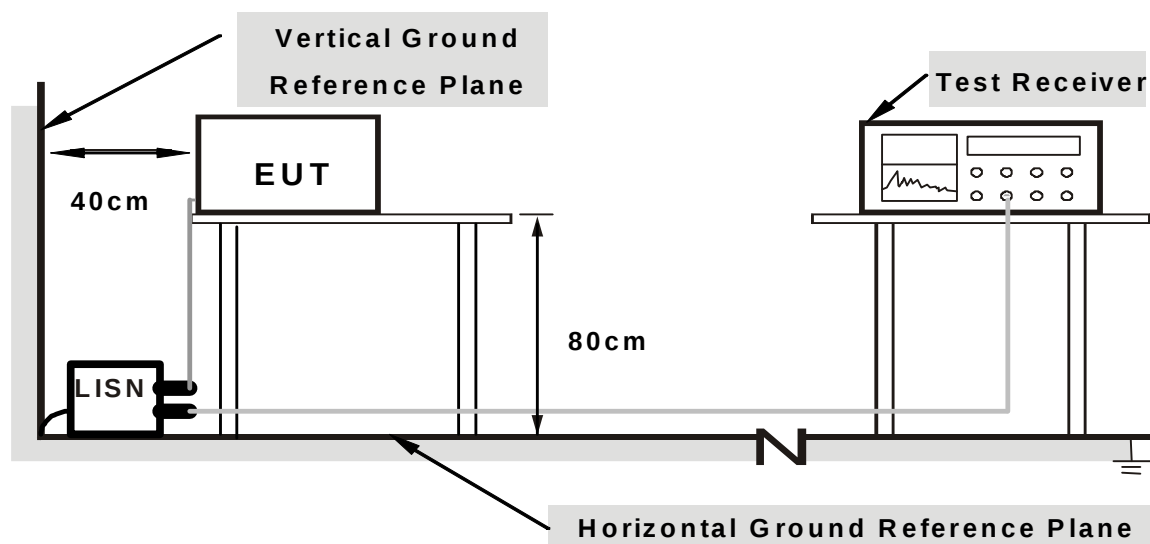

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.1.6 EUT OPERATING CONDITIONS

Same as the 4.1.6


5.1.7 TEST RESULTS

802.11a OFDM MODULATION:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line (L)
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 965hPa	TESTED BY	Eric Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.209	9.71	37.61	-	47.32	-	63.26	53.26	-15.94	-
2	0.525	9.89	25.83	-	35.72	-	56.00	46.00	-20.28	-
3	0.736	9.79	23.52	-	33.31	-	56.00	46.00	-22.69	-
4	1.063	9.67	22.53	-	32.20	-	56.00	46.00	-23.80	-
5	7.371	9.81	19.63	-	29.44	-	60.00	50.00	-30.56	-
6	11.375	9.86	21.30	-	31.16	-	60.00	50.00	-28.84	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

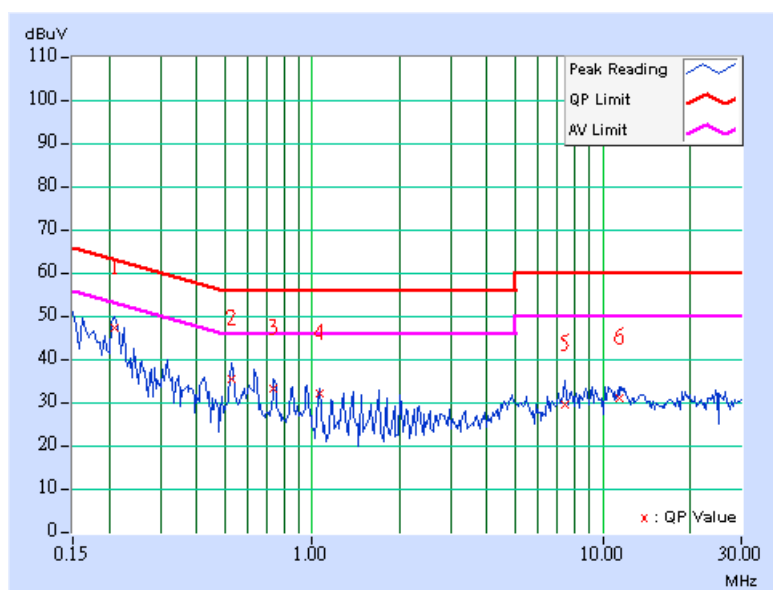

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Neutral (N)
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 965hPa	TESTED BY	Eric Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.209	9.71	40.07	-	49.78	-	63.26	53.26	-13.48	-
2	0.525	9.88	35.54	-	45.42	-	56.00	46.00	-10.58	-
3	0.736	9.79	34.11	-	43.90	-	56.00	46.00	-12.10	-
4	1.156	9.68	33.21	-	42.89	-	56.00	46.00	-13.11	-
5	1.793	9.71	30.71	-	40.42	-	56.00	46.00	-15.58	-
6	4.844	9.78	29.46	-	39.24	-	56.00	46.00	-16.76	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

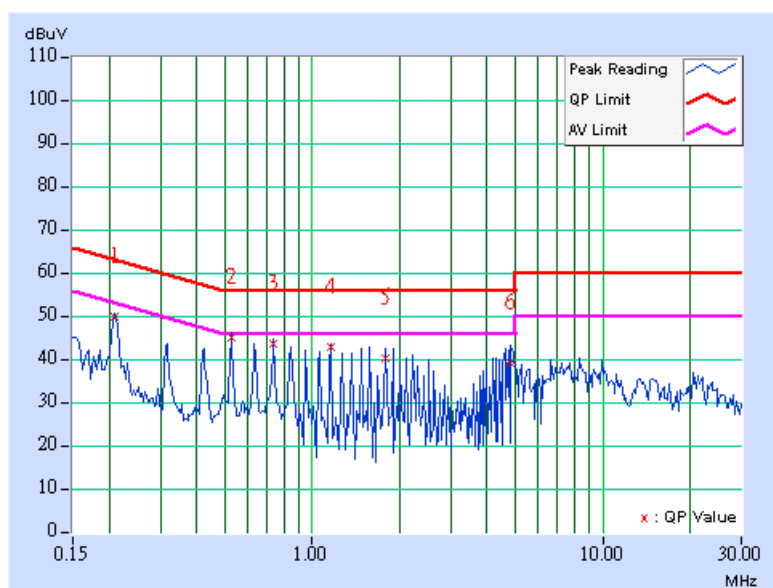

5.2 RADIATED EMISSION MEASUREMENT

5.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

5.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ADVANTEST Spectrum Analyzer	R3271A	85060311	July 16, 2008	July 15, 2009
HP Pre_Amplifier	8449B	3008A01922	Oct. 05, 2007	Oct. 04, 2008
ROHDE & SCHWARZ Test Receiver	ESCS30	100375	April 01, 2008	Mar. 31, 2009
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	April 30, 2008	April 29, 2009
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 17, 2007	Dec. 16, 2008
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 28, 2008	Jan. 27, 2009
R&S Loop Antenna	HFH2-Z2	100070	Jan. 14, 2008	Jan. 13, 2009
RF Switches (ARNITSU)	CS-201	1565157	Aug. 13, 2008	Aug. 12, 2009
RF CABLE (Chaintek)	SF102	22054-2	Dec. 07, 2007	Dec. 06, 2008
RF Cable	8DFB	STCCAB-30 M-1GHz	Oct. 10, 2007	Oct. 09, 2008
Software	ADT_Radiated_V7.6.15.8	NA	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA	NA
CHANCE MOST Turn Table	TT-100	0203	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: R3271A) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 3789C-3.

5.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation

5.2.5 TEST SETUP

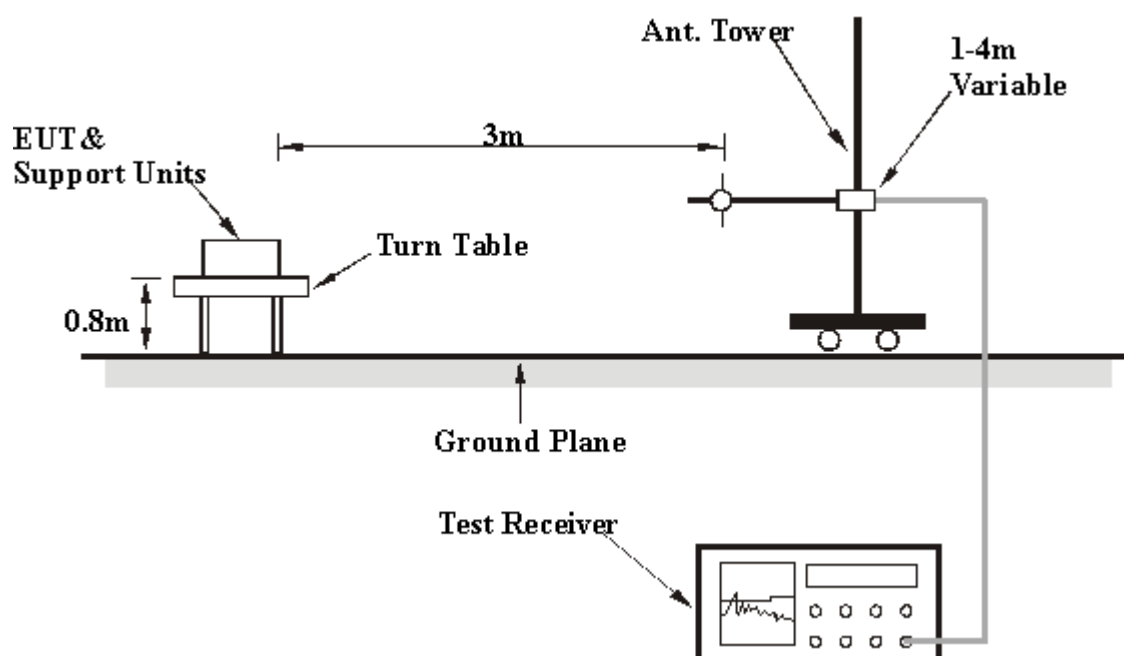

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.2.6 EUT OPERATING CONDITIONS

Same as the 4.1.6

Below 1GHz Test Data

5.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA : 802.11a OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24deg. C, 74%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	60.45	20.89 QP	40.00	-19.11	1.00 H	163	5.90	14.99
2	245.50	35.91 QP	46.00	-10.09	1.06 H	283	19.81	16.10
3	263.98	31.14 QP	46.00	-14.86	1.00 H	275	14.40	16.74
4	360.00	34.19 QP	46.00	-11.81	1.07 H	162	13.80	20.39
5	480.00	30.92 QP	46.00	-15.08	1.00 H	6	7.27	23.65
6	720.00	32.20 QP	46.00	-13.80	1.00 H	19	3.17	29.03
7	880.00	31.48 QP	46.00	-14.52	1.00 H	123	-0.75	32.23
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	60.60	30.98 QP	40.00	-9.02	1.00 V	20	16.02	14.96
2	120.00	20.26 QP	43.50	-23.24	1.00 V	250	5.78	14.48
3	240.25	25.40 QP	46.00	-20.60	1.48 V	312	9.57	15.83
4	360.00	26.50 QP	46.00	-19.50	1.00 V	20	6.11	20.39
5	480.00	31.20 QP	46.00	-14.80	1.01 V	10	7.55	23.65
6	720.00	30.34 QP	46.00	-15.66	1.03 V	216	1.31	29.03
7	880.00	30.73 QP	46.00	-15.27	1.09 V	148	-1.50	32.23

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

Above 1GHz Test Data

5.2.8 TEST RESULTS

802.11a OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4596.00	58.22 PK	74.00	-15.78	1.65 H	188	23.14	35.08
2	4596.00	51.75 AV	54.00	-2.25	1.65 H	188	16.67	35.08
3	*5745.00	104.12 PK			1.31 H	351	66.91	37.21
4	*5745.00	93.54 AV			1.31 H	351	56.33	37.21
5	11490.00	58.41 PK	74.00	-15.59	1.35 H	163	11.38	47.03
6	11490.00	44.63 AV	54.00	-9.37	1.35 H	163	-2.40	47.03
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4596.00	56.72 PK	74.00	-17.28	1.13 V	114	21.64	35.08
2	4596.00	48.54 AV	54.00	-5.46	1.13 V	114	13.46	35.08
3	*5745.00	107.87 PK			1.21 V	22	70.66	37.21
4	*5745.00	98.15 AV			1.21 V	22	60.94	37.21
5	11490.00	60.62 PK	74.00	-13.38	1.40 V	169	13.59	47.03
6	11490.00	46.66 AV	54.00	-7.34	1.40 V	169	-0.37	47.03

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. The limit value is defined as per 15.247.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 3	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4628.00	58.98 PK	74.00	-15.02	1.65 H	180	23.84	35.14
2	4628.00	53.09 AV	54.00	-0.91	1.65 H	180	17.95	35.14
3	*5785.00	103.80 PK			1.31 H	347	66.49	37.31
4	*5785.00	93.27 AV			1.31 H	347	55.96	37.31
5	11570.00	57.14 PK	74.00	-16.86	1.45 H	179	10.17	46.97
6	11570.00	44.01 AV	54.00	-9.99	1.45 H	179	-2.96	46.97
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4628.00	58.29 PK	74.00	-15.71	1.54 V	96	23.15	35.14
2	4628.00	51.50 AV	54.00	-2.50	1.54 V	96	16.36	35.14
3	*5785.00	106.55 PK			1.35 V	234	69.24	37.31
4	*5785.00	96.52 AV			1.35 V	234	59.21	37.31
5	11570.00	60.44 PK	74.00	-13.56	1.40 V	167	13.47	46.97
6	11570.00	46.15 AV	54.00	-7.85	1.40 V	167	-0.82	46.97

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. The limit value is defined as per 15.247.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 5	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4660.00	59.55 PK	74.00	-14.45	1.49 H	21	24.36	35.19
2	4660.00	53.50 AV	54.00	-0.50	1.49 H	21	18.31	35.19
3	*5825.00	102.05 PK			1.48 H	350	64.63	37.42
4	*5825.00	92.08 AV			1.48 H	350	54.66	37.42
5	11650.00	57.89 PK	74.00	-16.11	1.63 H	210	10.99	46.90
6	11650.00	44.81 AV	54.00	-9.19	1.63 H	210	-2.09	46.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4660.00	59.24 PK	74.00	-14.76	1.25 V	89	24.05	35.19
2	4660.00	53.28 AV	54.00	-0.72	1.25 V	89	18.09	35.19
3	*5825.00	105.76 PK			1.32 V	241	68.34	37.42
4	*5825.00	95.40 AV			1.32 V	241	57.98	37.42
5	11650.00	60.45 PK	74.00	-13.55	1.38 V	166	13.55	46.90
6	11650.00	46.10 AV	54.00	-7.90	1.38 V	166	-0.80	46.90

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. The limit value is defined as per 15.247.

DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4596.00	58.50 PK	74.00	-15.50	1.38 H	182	23.42	35.08
2	4596.00	51.10 AV	54.00	-2.90	1.38 H	182	16.02	35.08
3	*5745.00	106.70 PK			1.33 H	8	69.49	37.21
4	*5745.00	95.30 AV			1.33 H	8	58.09	37.21
5	11490.00	58.30 PK	74.00	-15.70	1.35 H	326	11.27	47.03
6	11490.00	46.00 AV	54.00	-8.00	1.35 H	326	-1.03	47.03
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4596.00	57.50 PK	74.00	-16.50	1.44 V	276	22.42	35.08
2	4596.00	46.90 AV	54.00	-7.10	1.44 V	276	11.82	35.08
3	*5745.00	108.20 PK			1.23 V	269	70.99	37.21
4	*5745.00	96.10 AV			1.23 V	269	58.89	37.21
5	11490.00	59.30 PK	74.00	-14.70	1.28 V	6	12.27	47.03
6	11490.00	46.10 AV	54.00	-7.90	1.28 V	6	-0.93	47.03

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. The limit value is defined as per 15.247.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 3	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4628.00	59.30 PK	74.00	-14.70	1.38 H	178	24.16	35.14
2	4628.00	52.70 AV	54.00	-1.30	1.38 H	178	17.56	35.14
3	*5785.00	108.20 PK			1.32 H	5	70.89	37.31
4	*5785.00	96.20 AV			1.32 H	5	58.89	37.31
5	11570.00	57.88 PK	74.00	-16.12	1.32 H	315	10.91	46.97
6	11570.00	44.20 AV	54.00	-9.80	1.32 H	315	-2.77	46.97
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4628.00	56.40 PK	74.00	-17.60	1.42 V	276	21.26	35.14
2	4628.00	45.70 AV	54.00	-8.30	1.42 V	276	10.56	35.14
3	*5785.00	108.60 PK			1.30 V	270	71.29	37.31
4	*5785.00	96.40 AV			1.30 V	270	59.09	37.31
5	11570.00	59.60 PK	74.00	-14.40	1.46 V	13	12.63	46.97
6	11570.00	45.90 AV	54.00	-8.10	1.46 V	13	-1.07	46.97

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. The limit value is defined as per 15.247.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 5	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4660.00	59.20 PK	74.00	-14.80	1.31 H	173	24.01	35.19
2	4660.00	52.30 AV	54.00	-1.70	1.31 H	173	17.11	35.19
3	*5825.00	108.30 PK			1.32 H	1	70.88	37.42
4	*5825.00	96.70 AV			1.32 H	1	59.28	37.42
5	11610.00	56.40 PK	74.00	-17.60	1.35 H	329	9.47	46.93
6	11610.00	43.50 AV	54.00	-10.50	1.35 H	329	-3.43	46.93
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4660.00	57.60 PK	74.00	-16.40	1.38 V	277	22.41	35.19
2	4660.00	46.00 AV	54.00	-8.00	1.38 V	277	10.81	35.19
3	*5825.00	108.00 PK			1.26 V	267	70.58	37.42
4	*5825.00	96.00 AV			1.26 V	267	58.58	37.42
5	11610.00	57.10 PK	74.00	-16.90	1.34 V	2	10.17	46.93
6	11610.00	44.53 AV	54.00	-9.47	1.34 V	2	-2.40	46.93

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. The limit value is defined as per 15.247.

DRAFT 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4604.00	58.50 PK	74.00	-15.50	1.46 H	8	23.41	35.09
2	4604.00	51.35 AV	54.00	-2.65	1.46 H	8	16.26	35.09
3	*5755.00	101.53 PK			1.29 H	165	64.30	37.23
4	*5755.00	91.00 AV			1.29 H	165	53.77	37.23
5	11510.00	57.75 PK	74.00	-16.25	1.42 H	173	10.73	47.02
6	11510.00	44.54 AV	54.00	-9.46	1.42 H	173	-2.48	47.02
7	11510.00	57.75 PK	74.00	-16.25	1.42 H	173	10.73	47.02
8	11510.00	44.54 AV	54.00	-9.46	1.42 H	173	-2.48	47.02
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4604.00	57.24 PK	74.00	-16.76	1.26 V	249	22.15	35.09
2	4604.00	49.55 AV	54.00	-4.45	1.26 V	249	14.46	35.09
3	*5755.00	104.50 PK			1.23 V	23	67.27	37.23
4	*5755.00	93.61 AV			1.23 V	23	56.38	37.23
5	#9204.00	55.00 PK	84.50	-29.50	1.36 V	19	10.46	44.54
6	#9204.00	40.87 AV	73.61	-32.74	1.36 V	19	-3.67	44.54
7	11510.00	57.73 PK	74.00	-16.27	1.36 V	229	10.71	47.02
8	11510.00	44.69 AV	54.00	-9.31	1.36 V	229	-2.33	47.02

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The limit value is defined as per 15.247.
 7. “#”: The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 2	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 965hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4636.00	58.30 PK	74.00	-15.70	1.50 H	173	23.15	35.15
2	4636.00	51.20 AV	54.00	-2.80	1.50 H	173	16.05	35.15
3	*5795.00	102.30 PK			1.15 H	174	64.96	37.34
4	*5795.00	91.27 AV			1.15 H	174	53.93	37.34
5	#9272.00	54.70 PK	82.30	-27.60	1.44 H	160	10.03	44.67
6	#9272.00	51.23 AV	71.27	-20.04	1.44 H	160	6.56	44.67
7	11590.00	57.89 PK	74.00	-16.11	1.22 H	36	10.94	46.95
8	11590.00	44.73 AV	54.00	-9.27	1.22 H	36	-2.22	46.95
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4636.00	58.60 PK	74.00	-15.40	1.43 V	290	23.45	35.15
2	4636.00	51.30 AV	54.00	-2.70	1.43 V	290	16.15	35.15
3	*5795.00	102.70 PK			1.24 V	23	65.36	37.34
4	*5795.00	91.90 AV			1.24 V	23	54.56	37.34
5	#9272.00	55.09 PK	82.70	-27.61	1.27 V	6	10.42	44.67
6	#9272.00	41.03 AV	71.90	-30.87	1.27 V	6	-3.64	44.67
7	11590.00	57.42 PK	74.00	-16.58	1.45 V	236	10.47	46.95
8	11590.00	44.56 AV	54.00	-9.44	1.45 V	236	-2.39	46.95

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The limit value is defined as per 15.247.
 7. “#”:The radiated frequency is out the restricted band.

5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

5.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 09, 2008	Aug. 08, 2009

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


5.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

5.3.4 DEVIATION FROM TEST STANDARD

No deviation

5.3.5 TEST SETUP

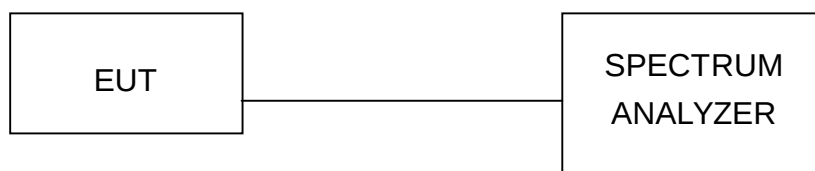

5.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


5.3.7 TEST RESULTS

802.11a OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	5745	16.63	0.5	PASS
3	5785	16.61	0.5	PASS
5	5825	16.59	0.5	PASS


CH1

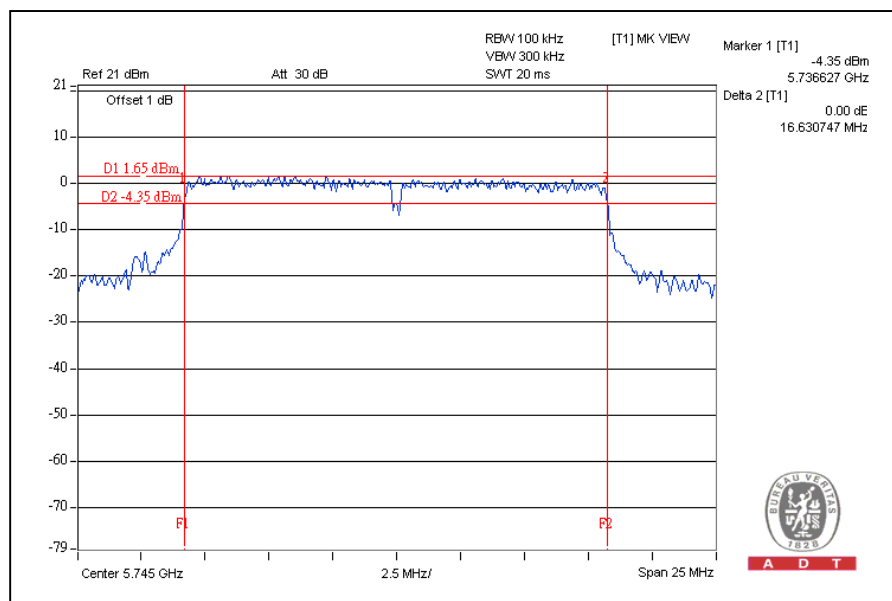

CH3

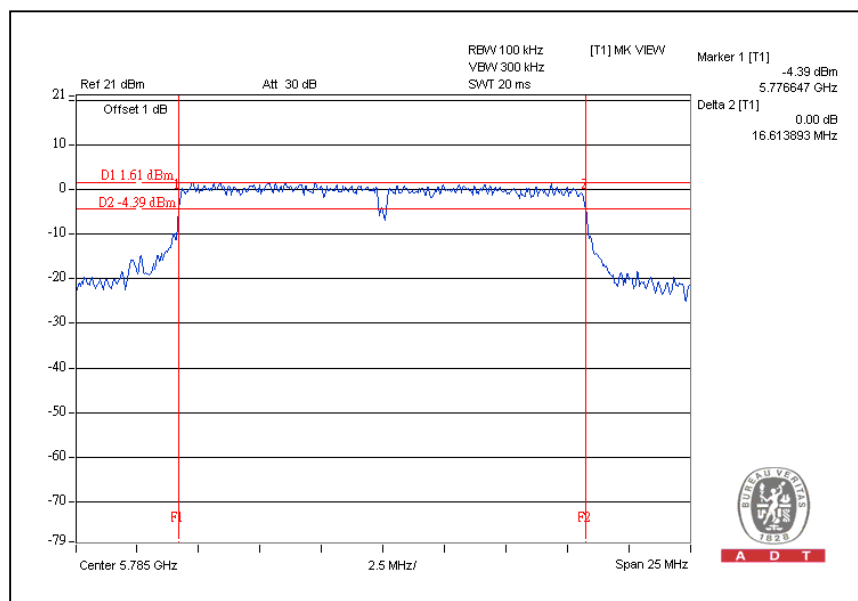

CH5

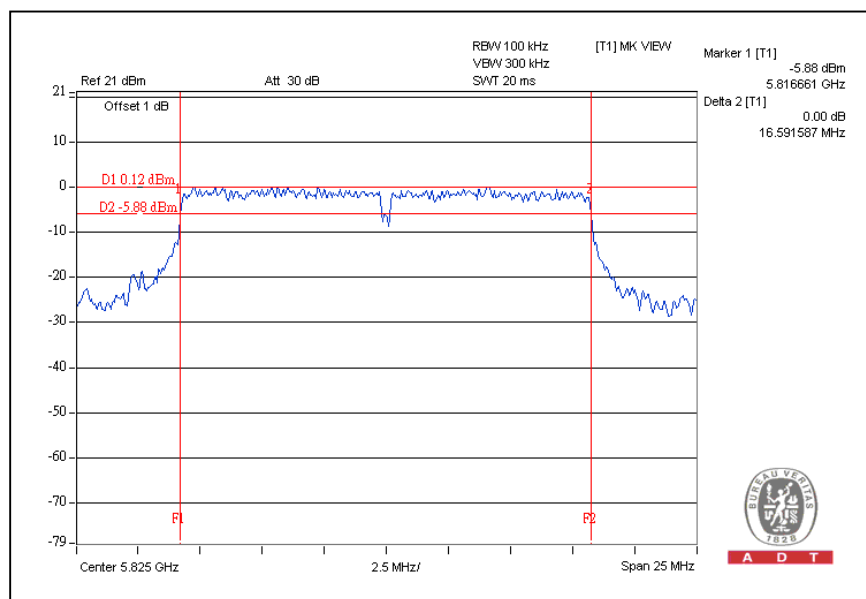


DRAFT 802.11n (20MHz) OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	13Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN(0)	CHAIN(1)		
1	5745	17.72	17.69	0.5	PASS
3	5785	17.75	17.68	0.5	PASS
5	5825	17.72	17.66	0.5	PASS


For Chain (0): CH1

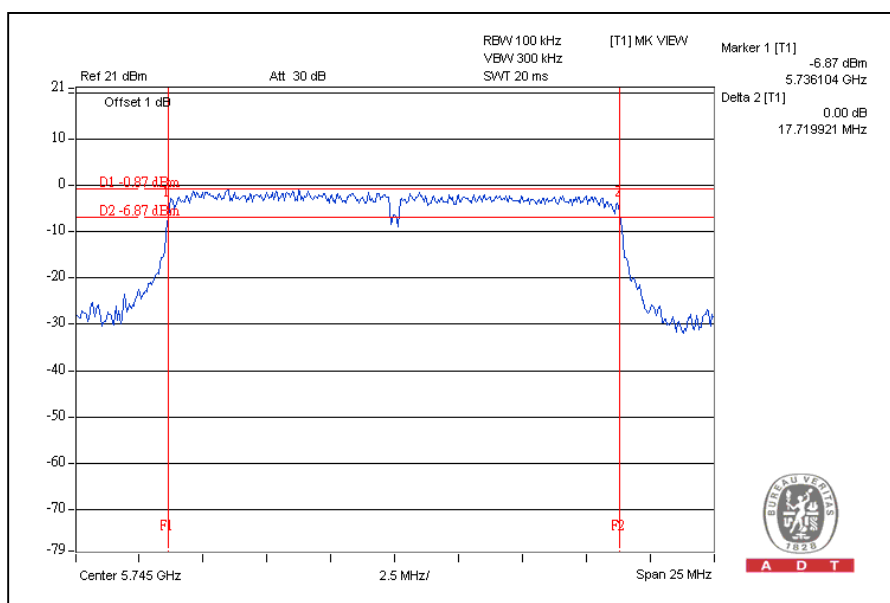


CH3

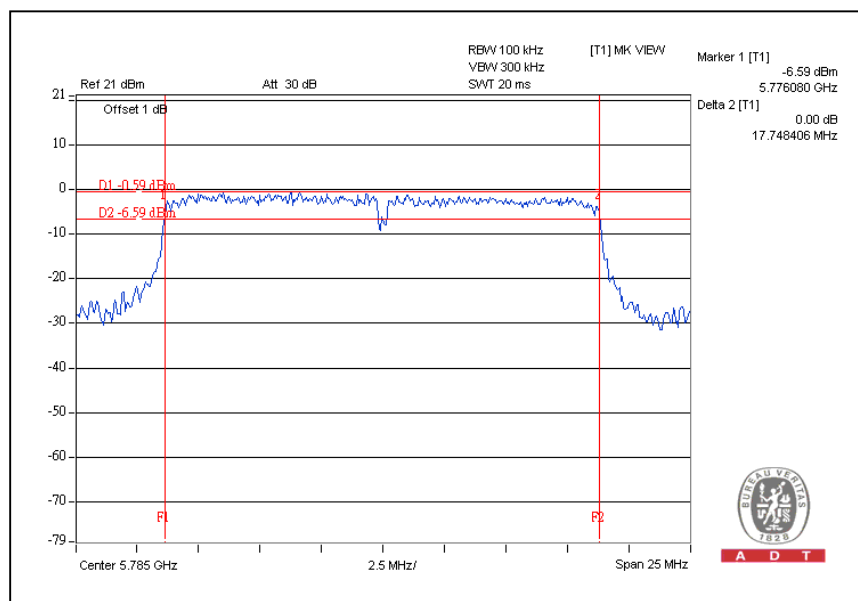


CH5

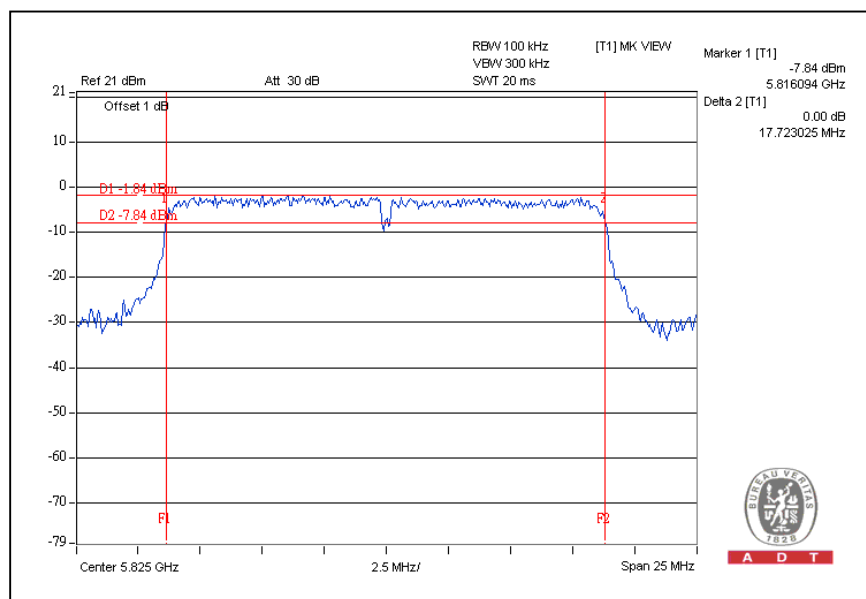


For Chain (1): CH1

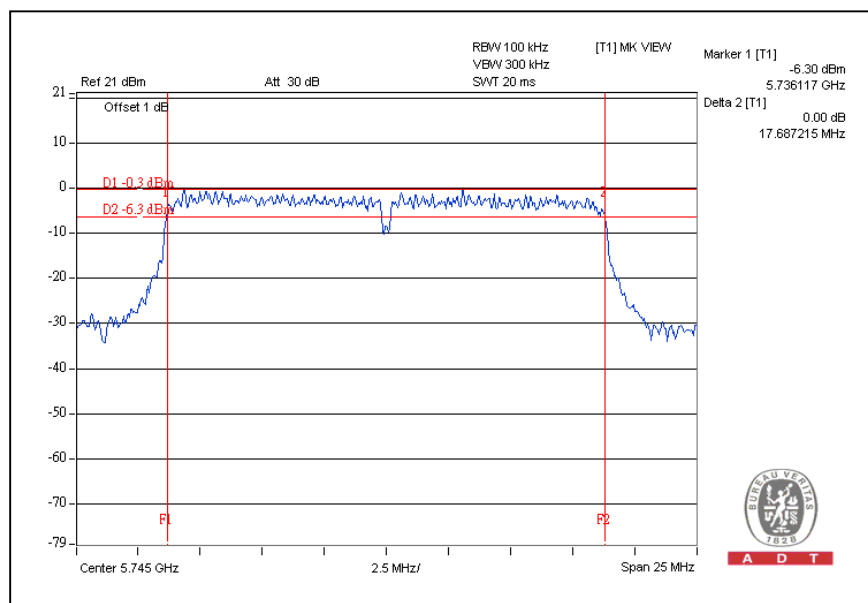

CH3

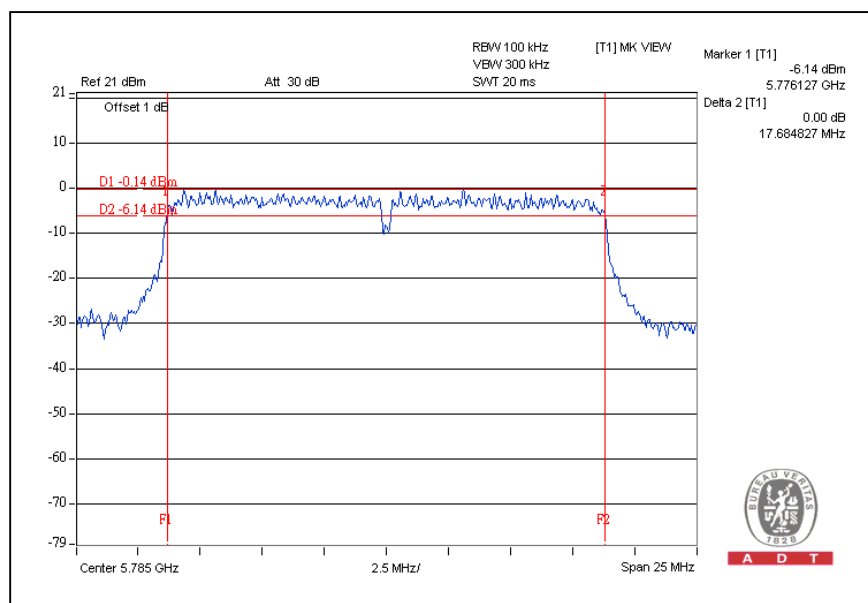

CH5

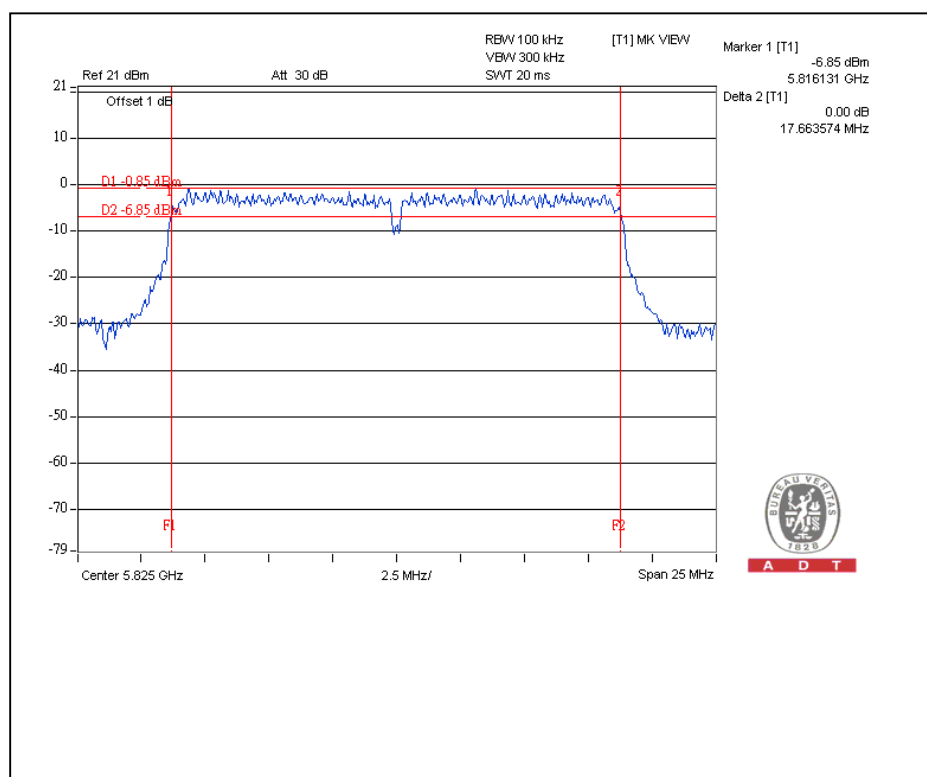


DRAFT 802.11n (40MHz) OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	27Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN(0)	CHAIN(1)		
1	5755	36.53	36.38	0.5	PASS
2	5795	36.53	36.47	0.5	PASS


For Chain (0): CH1

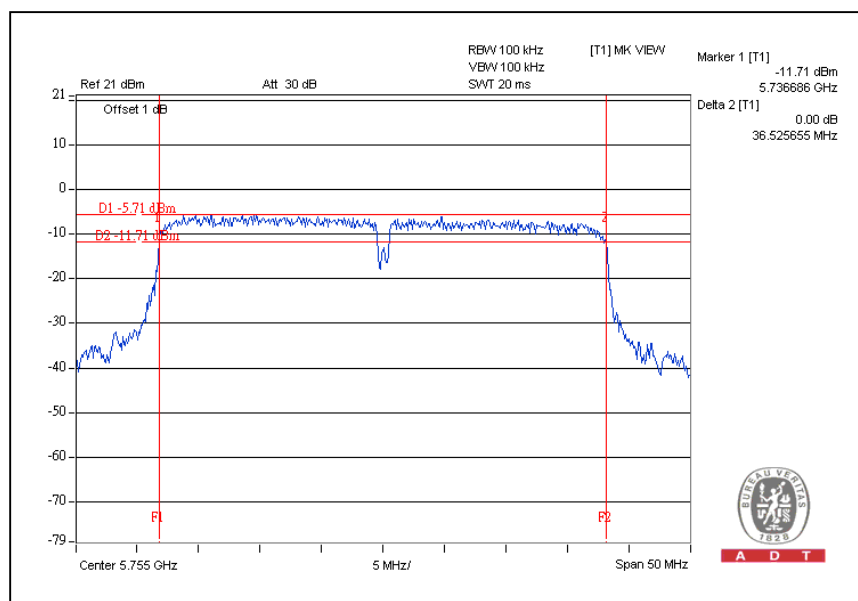


CH2

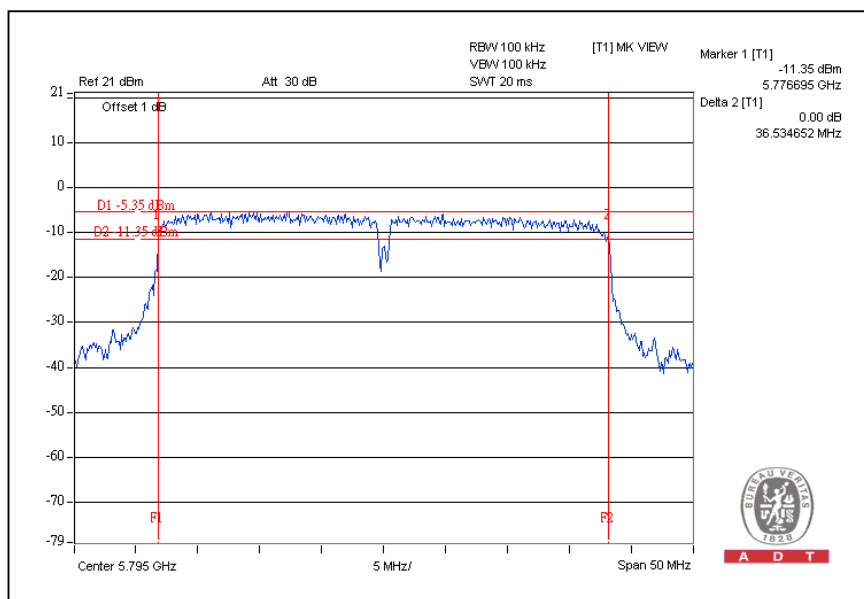

For Chain (1): CH1

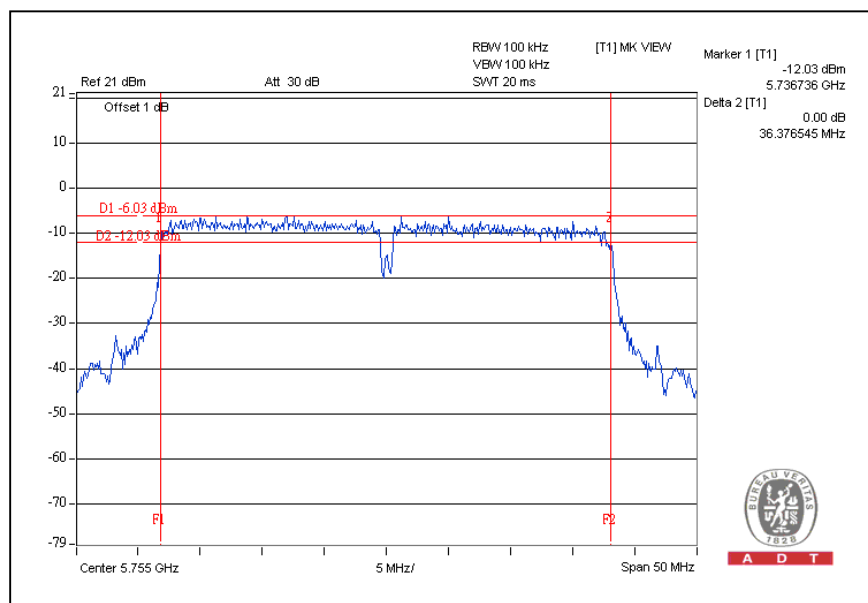

CH2

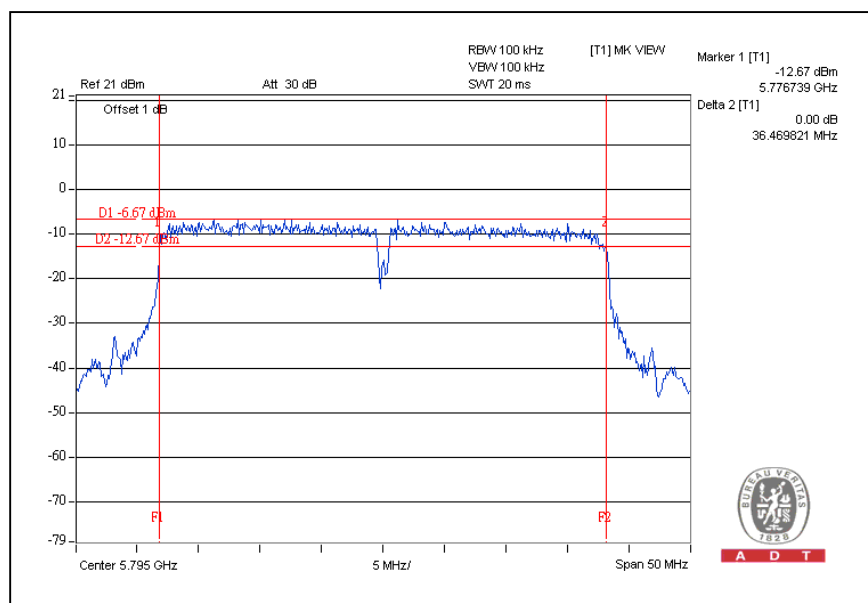

5.4 MAXIMUM PEAK OUTPUT POWER

5.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

5.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 13, 2008	Aug. 12, 2009
Agilent SIGNAL GENERATOR	E8257C	MY43320668	Dec. 26, 2007	Dec. 25, 2008
Anritsu Power Meter	ML2495A	0824006	NA	NA
Pulse Power Sensor	MA2411B	0738172	NA	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.4.3 TEST PROCEDURES

3. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
4. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
5. Adjusted the power to have the same reading on oscilloscope. Record the power level.

5.4.4 DEVIATION FROM TEST STANDARD

No deviation

5.4.5 TEST SETUP



5.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

5.4.7 TEST RESULTS

802.11a OFDM modulation

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	5745	120.781	20.82	30	PASS
3	5785	100.000	20.00	30	PASS
5	5825	119.399	20.77	30	PASS

DRAFT 802.11n (20MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	13Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)		PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(0)	CHAIN(1)				
1	5745	94.406	91.622	19.75	19.62	186.028	22.70	30	PASS
3	5785	96.161	92.897	19.83	19.68	189.058	22.77	30	PASS
5	5825	96.605	88.512	19.85	19.47	185.117	22.67	30	PASS

DRAFT 802.11n (40MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	27Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)		PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(0)	CHAIN(1)				
1	5755	94.189	90.365	19.74	19.56	184.554	22.66	30	PASS
2	5795	90.782	86.696	19.58	19.38	177.478	22.49	30	PASS

5.5 POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 09, 2008	Aug. 08, 2009

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

5.5.4 DEVIATION FROM TEST STANDARD

No deviation

5.5.5 TEST SETUP



5.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6


5.5.7 TEST RESULTS

802.11a OFDM modulation


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	5745	-11.93	8	PASS
3	5785	-13.08	8	PASS
5	5825	-14.34	8	PASS


CH1

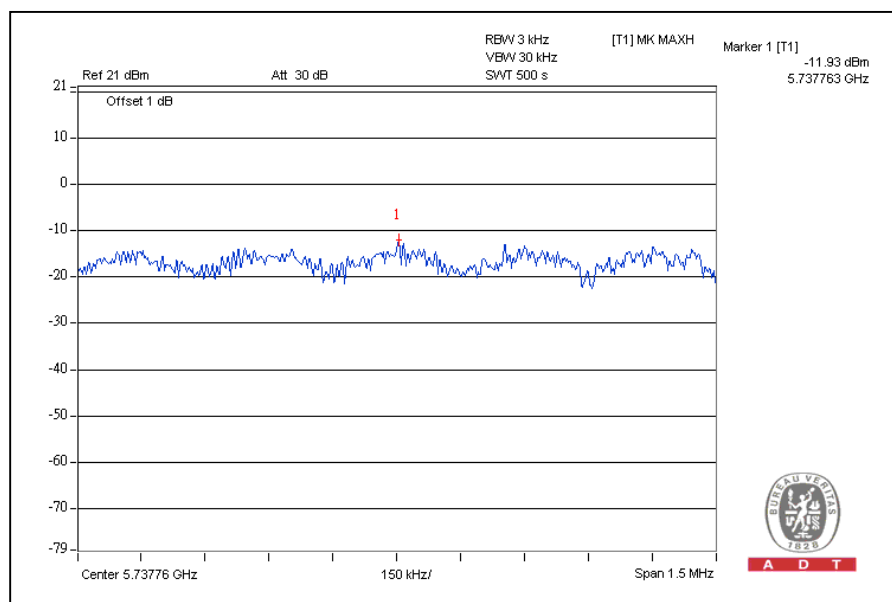

CH3

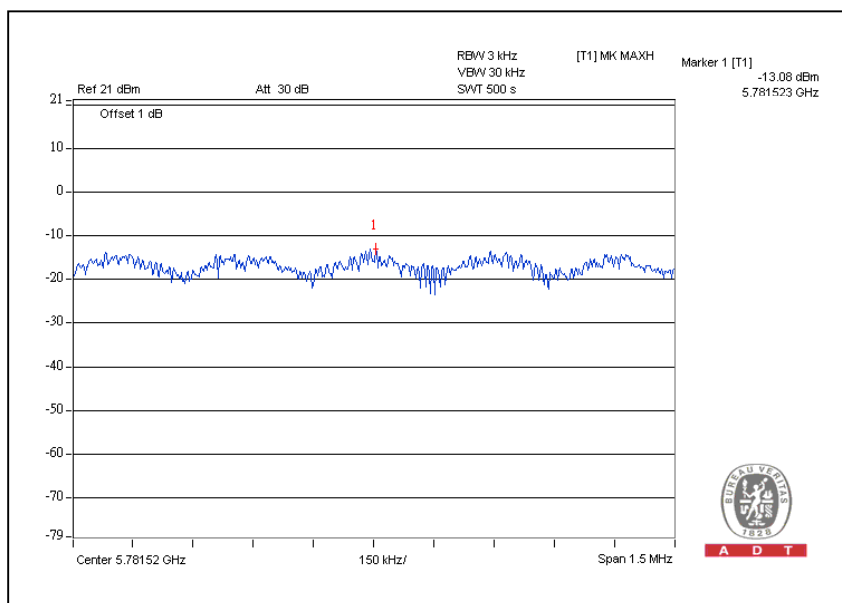

CH5

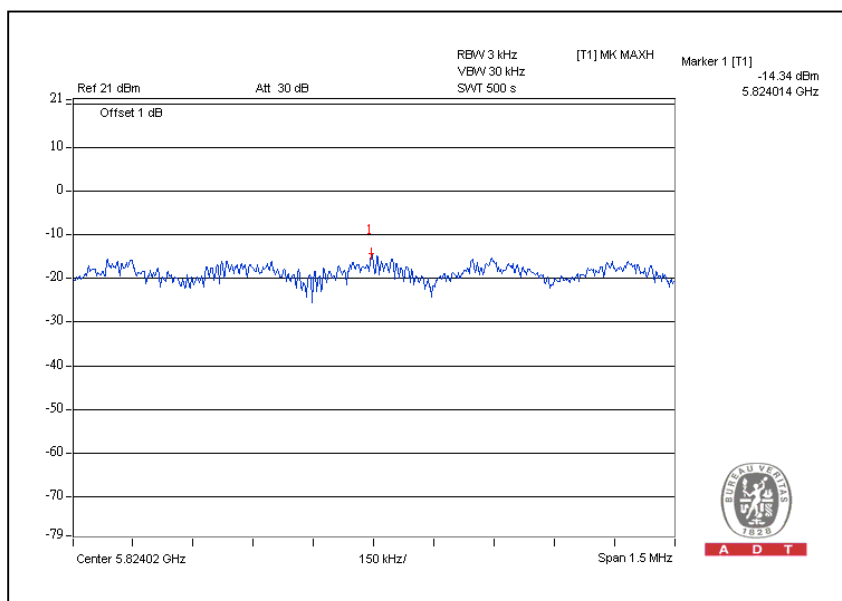


DRAFT 802.11n (20MHz) OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	13Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (mW)		RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(0)	CHAIN(1)				
1	5745	0.032	0.032	-14.99	-14.95	0.064	-11.94	8	PASS
3	5785	0.034	0.031	-14.74	-15.08	0.065	-11.87	8	PASS
5	5825	0.028	0.031	-15.47	-15.03	0.059	-12.29	8	PASS


For Chain(0): CH1

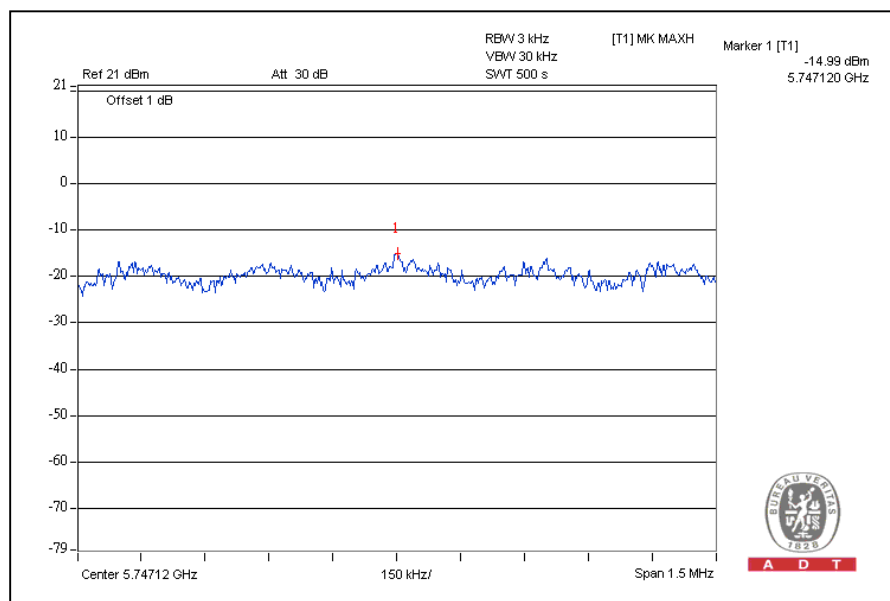


CH3

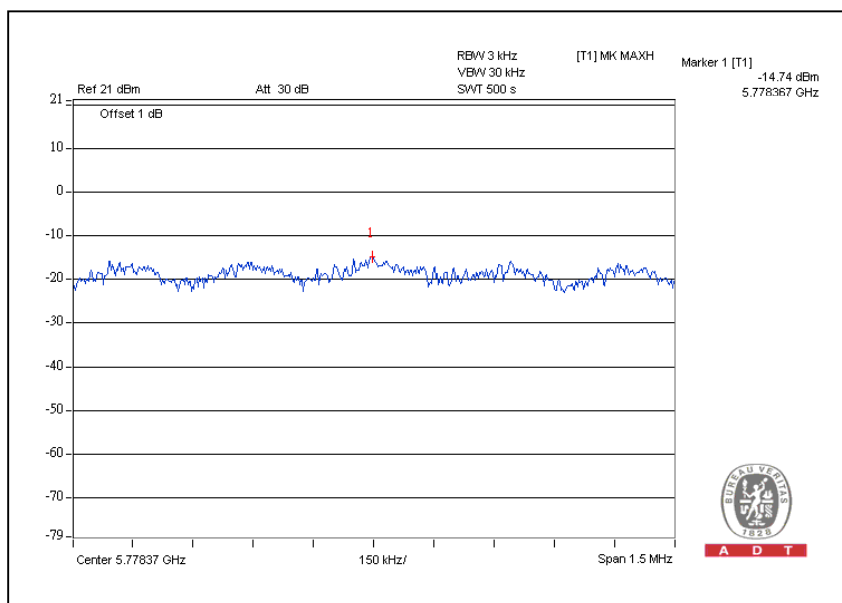


CH5

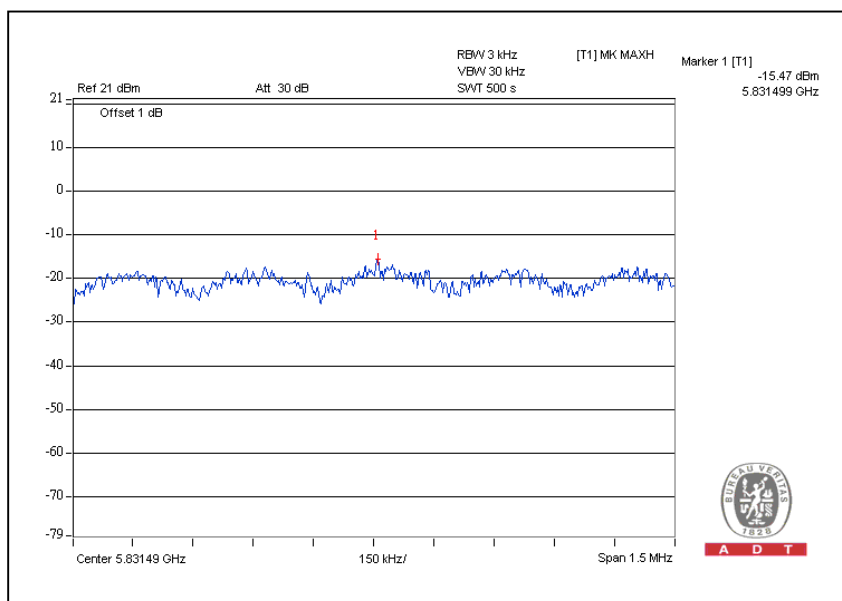


For Chain (1): CH1

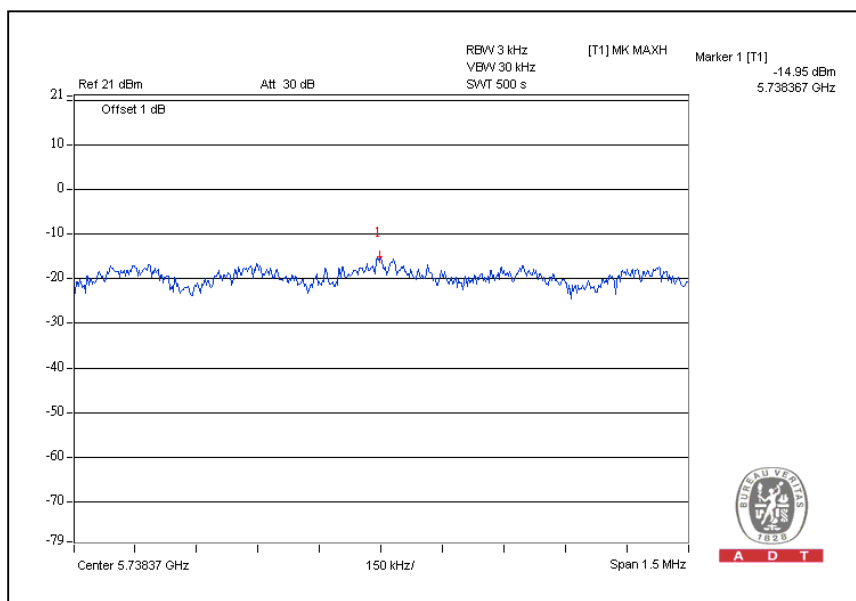

CH3

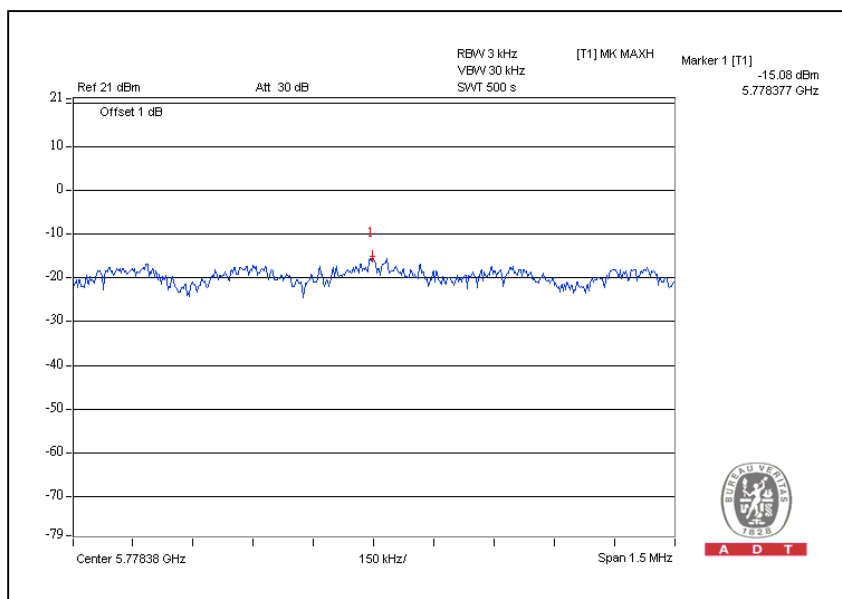

CH5

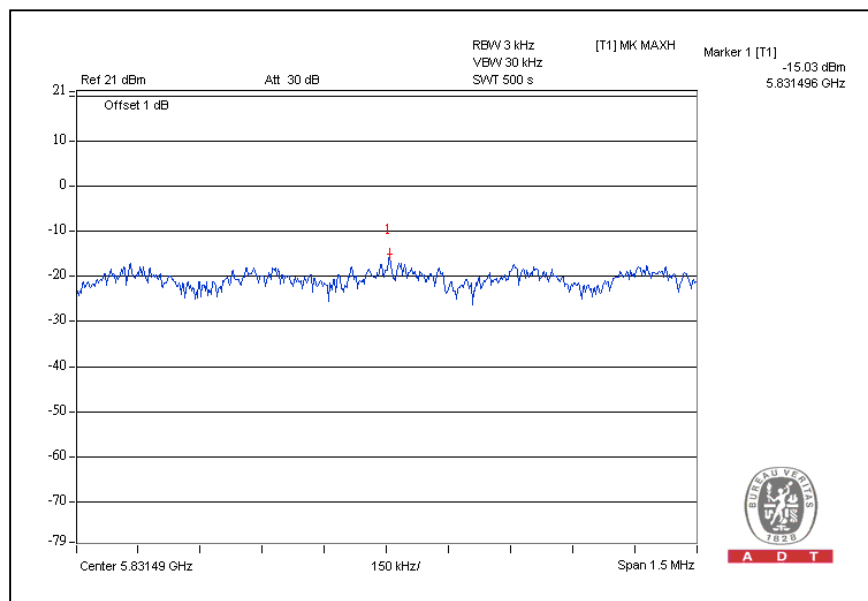


DRAFT 802.11n (40MHz) OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	27Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (mW)		RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(0)	CHAIN(1)				
1	5755	0.011	0.008	-19.65	-20.82	0.019	-17.21	8	PASS
2	5795	0.013	0.008	-18.72	-21.22	0.021	-16.78	8	PASS


For Chain(0): CH1

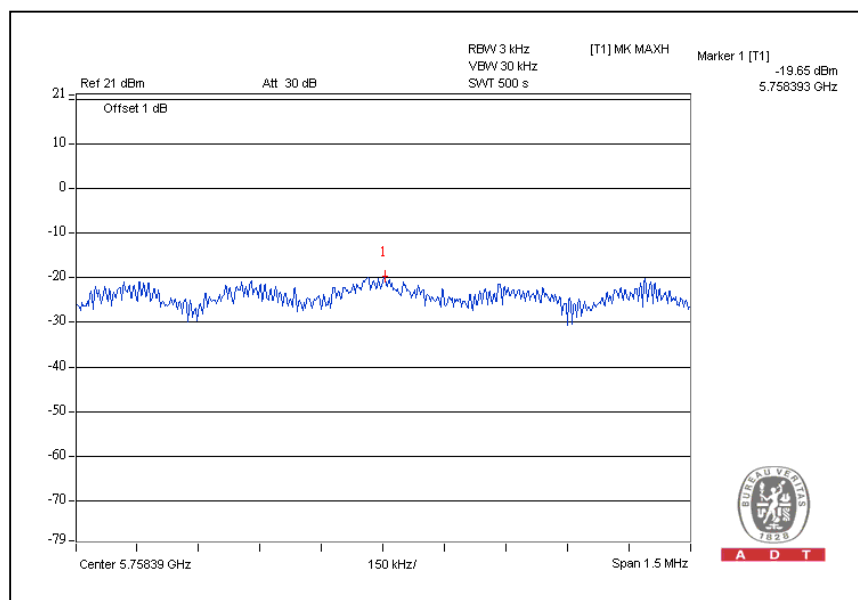


CH2

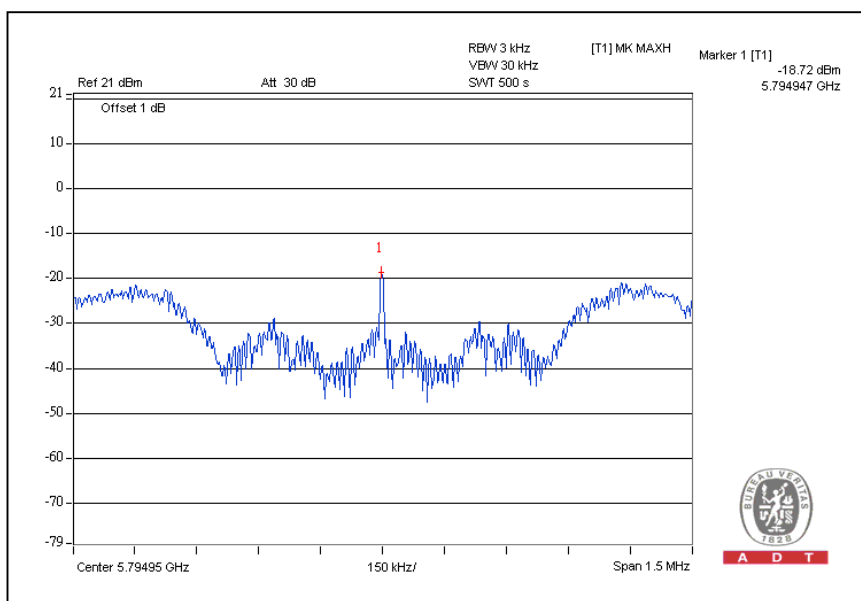

For Chain (1): CH1

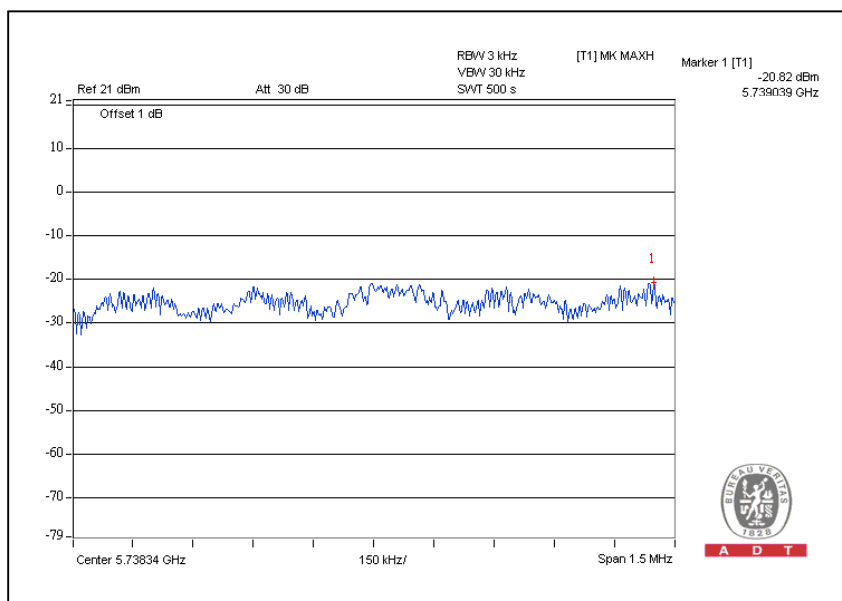

CH2

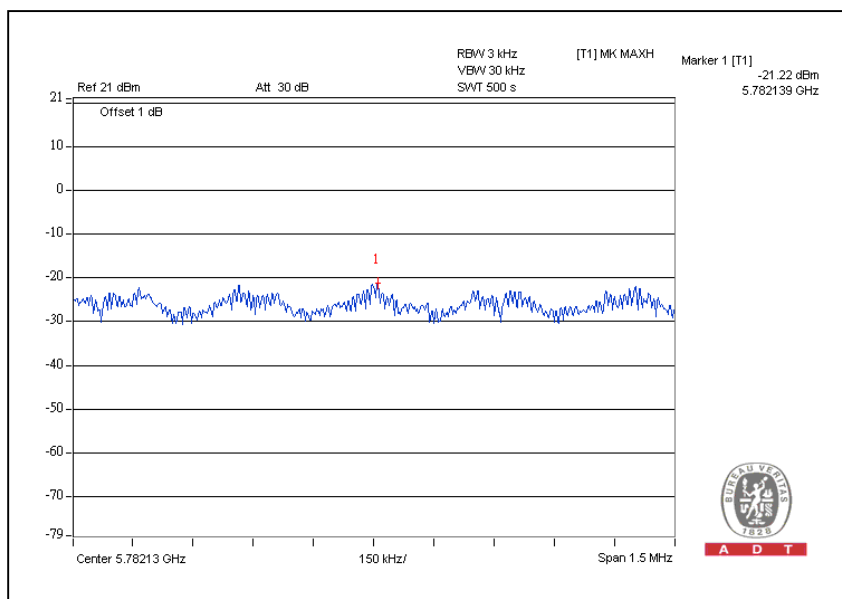

5.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

5.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 09, 2008	Aug. 08, 2009

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set RBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

5.6.4 DEVIATION FROM TEST STANDARD

No deviation

5.6.5 EUT OPERATING CONDITION


Same as Item 4.3.6

5.6.6 TEST RESULTS


The spectrum plots are attached on the following pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(d).

802.11a OFDM modulation


CH1

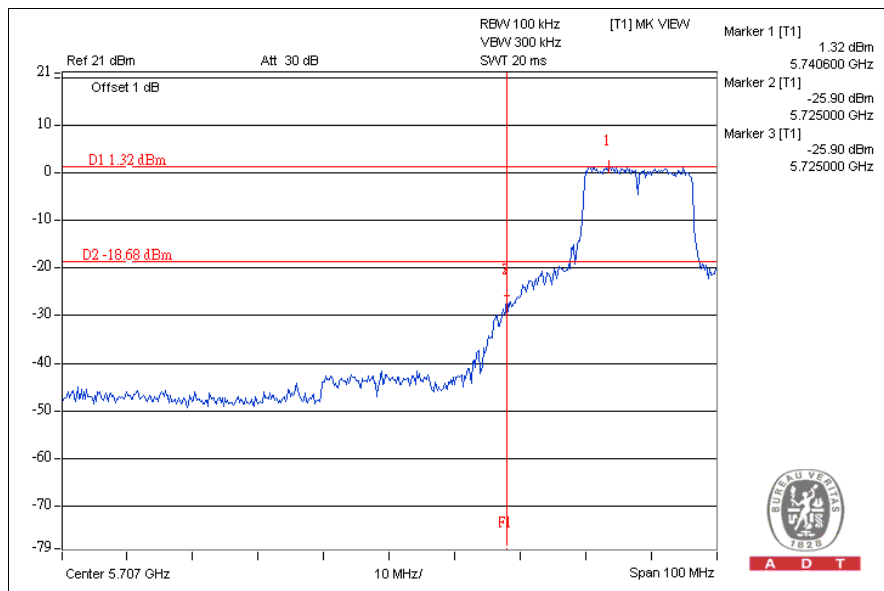


CH5

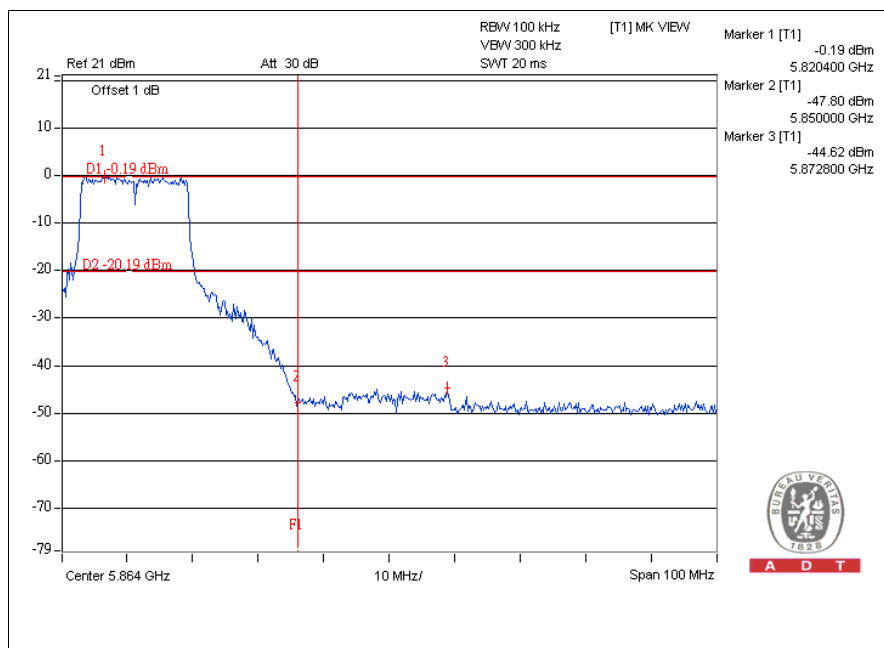

CH1

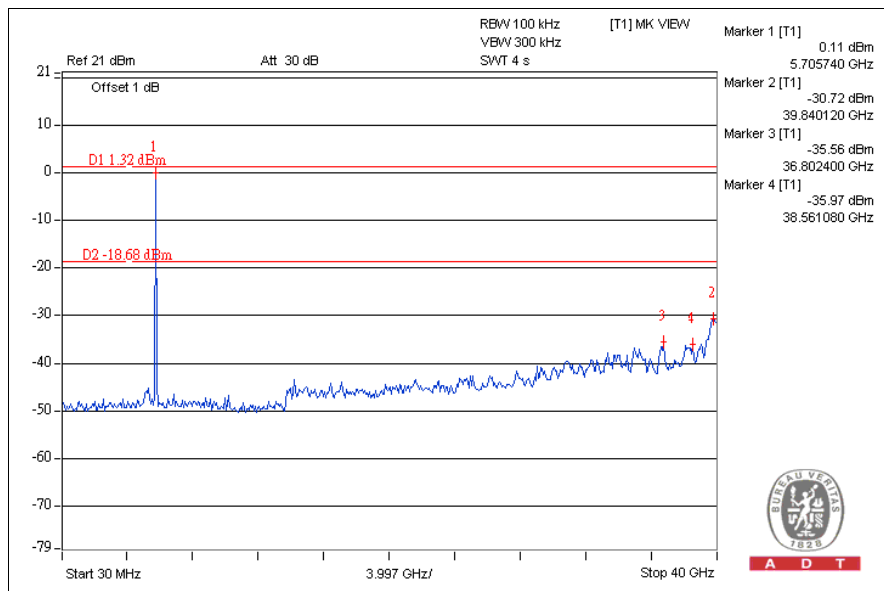


CH5

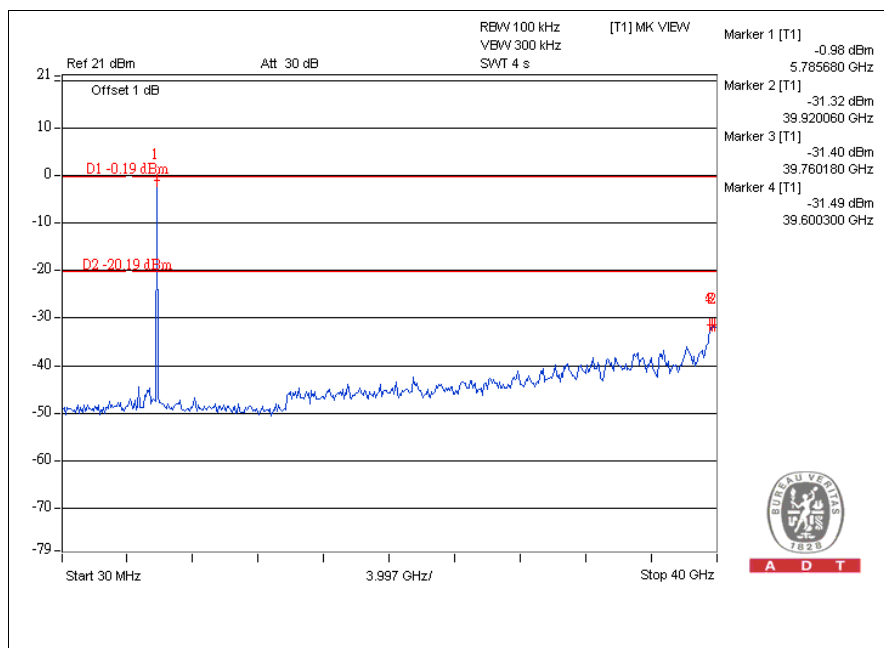


DRAFT 802.11n (20MHz) OFDM MODULATION:


For chain (0) :CH1

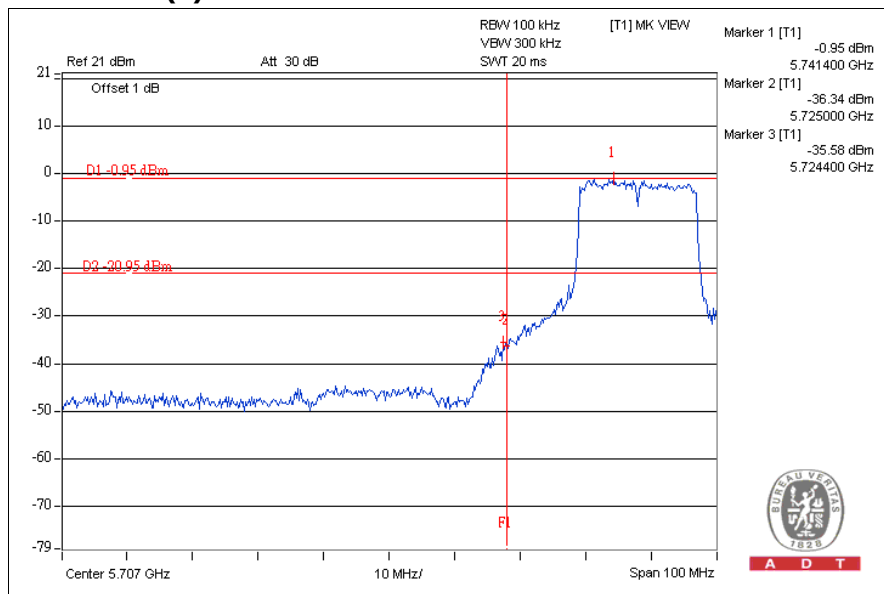


CH5

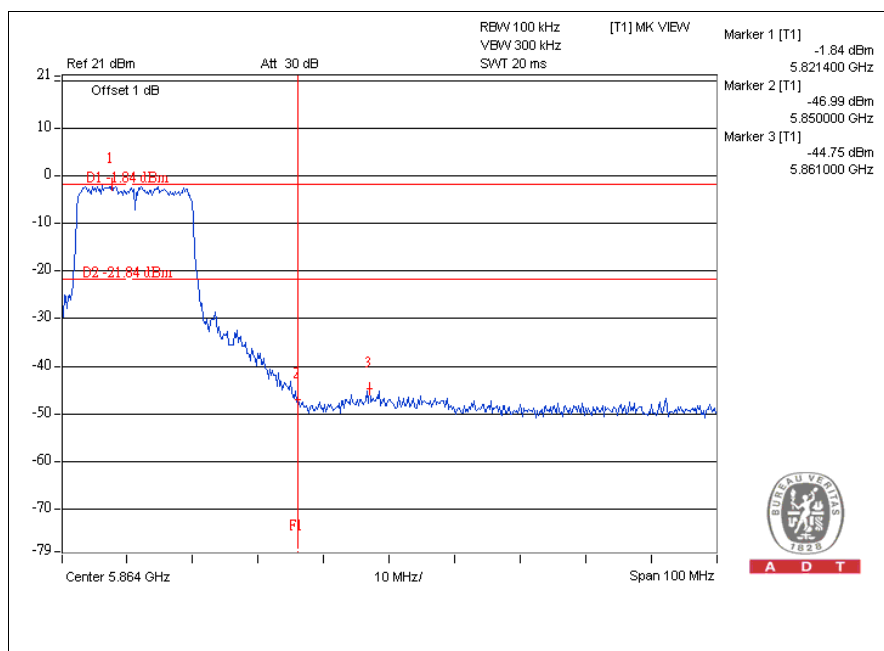


CH1

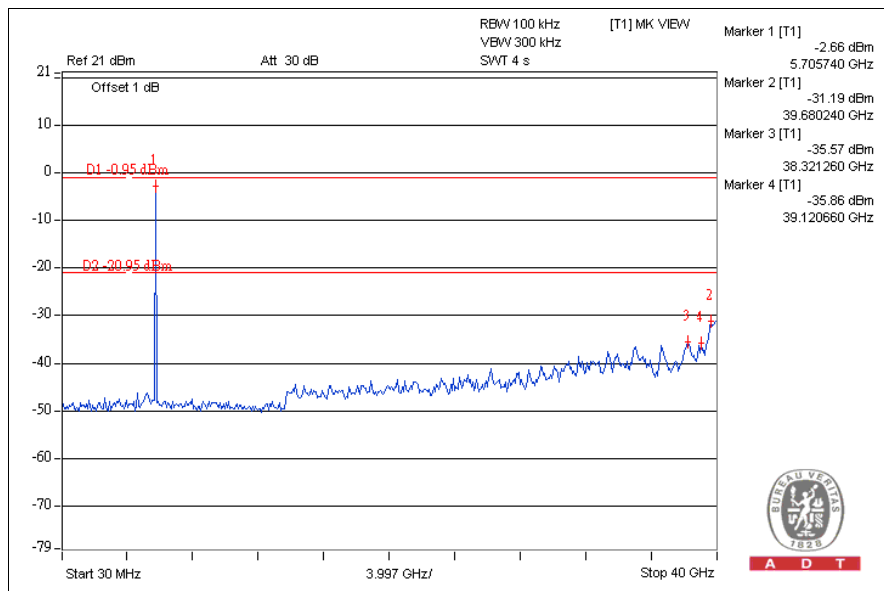


CH5

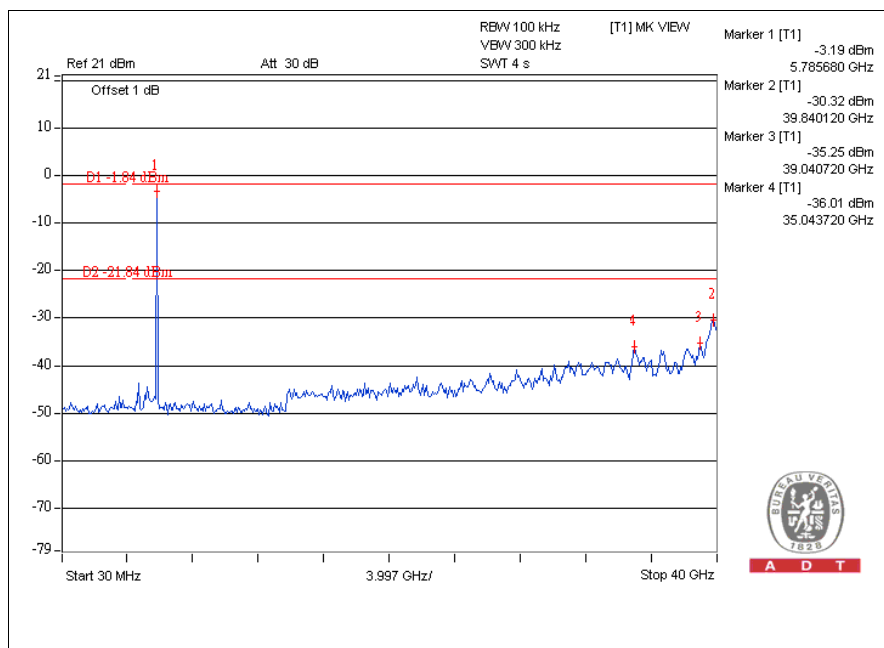


For chain (1):CH1

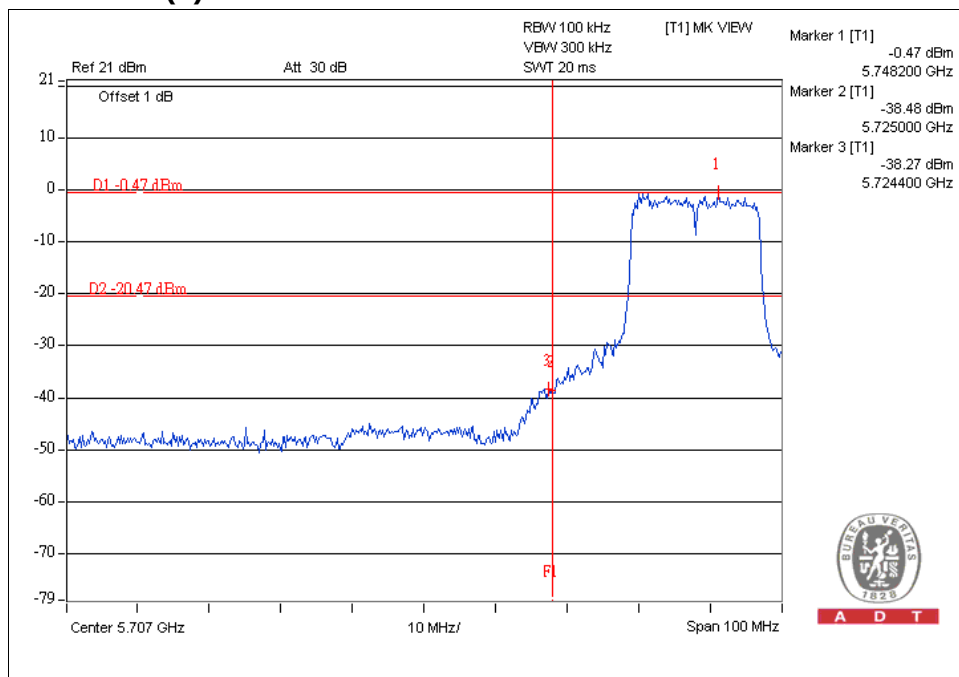


CH5

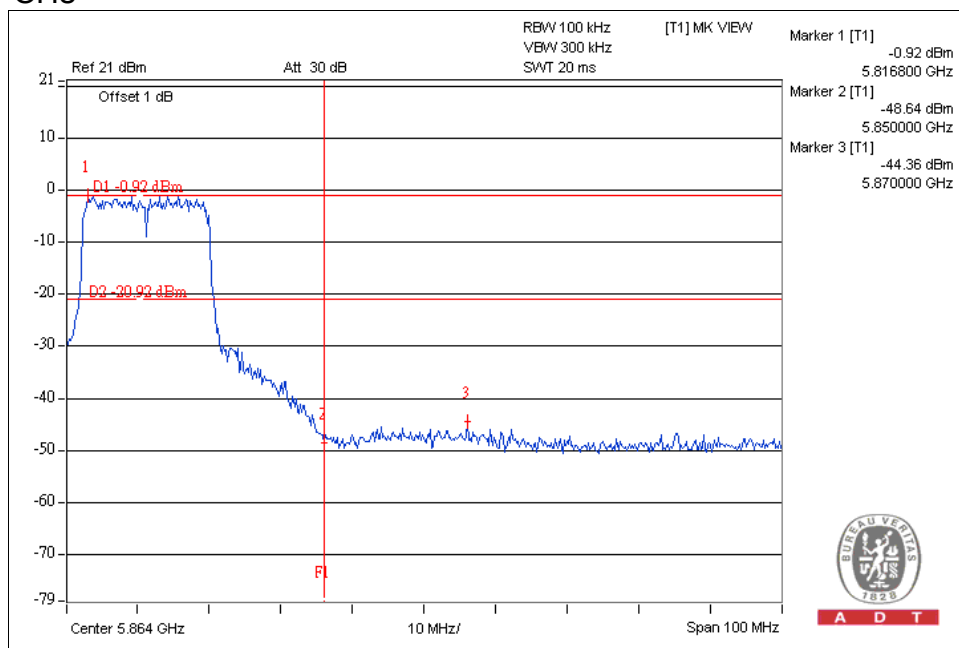

CH1

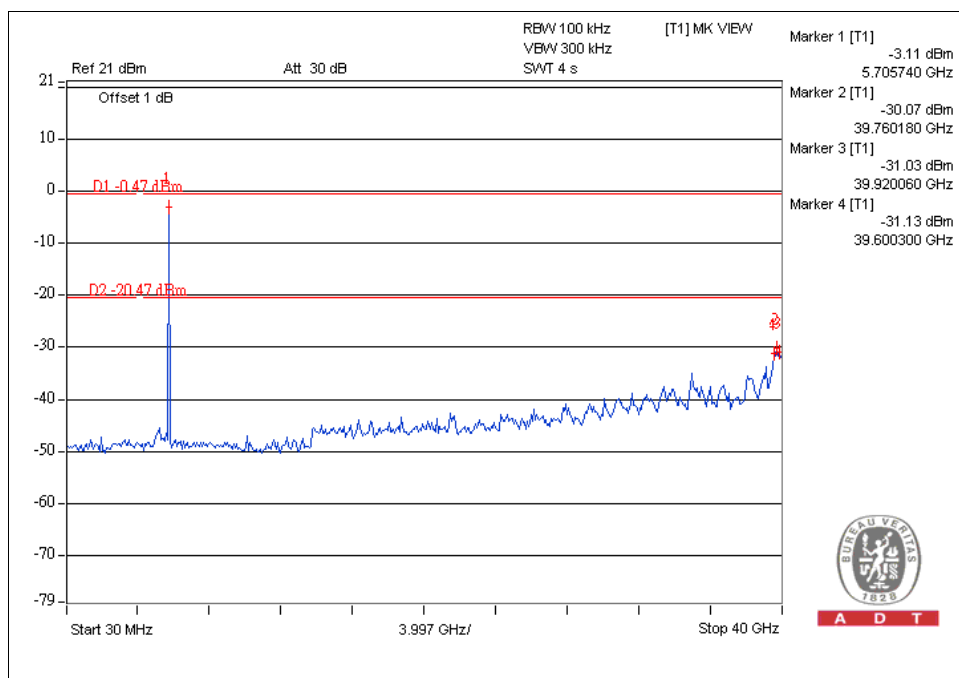


CH5

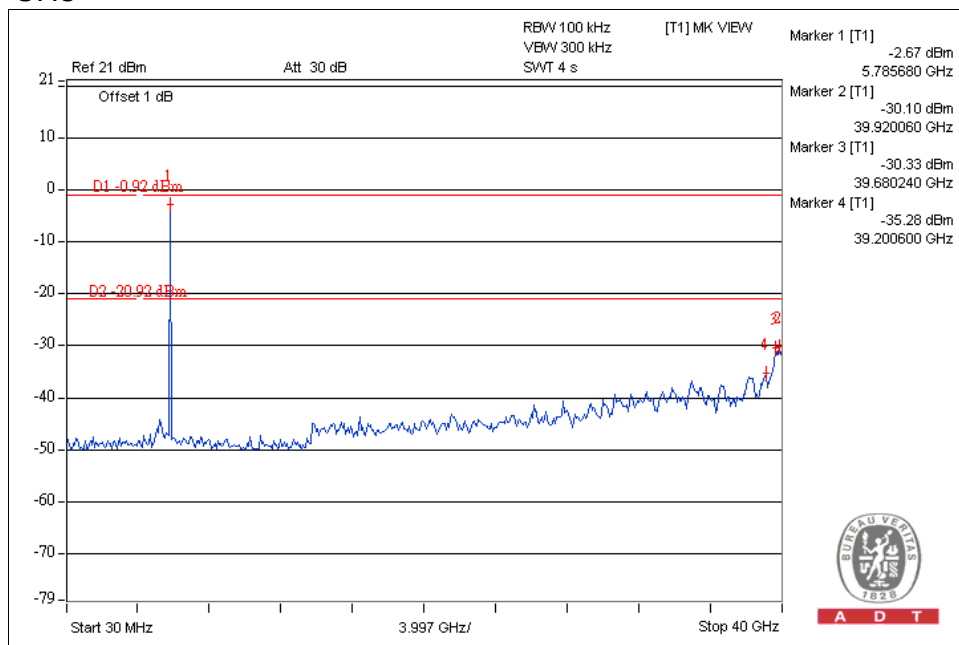


DRAFT 802.11n (40MHz) OFDM MODULATION:


For chain (0) :CH1

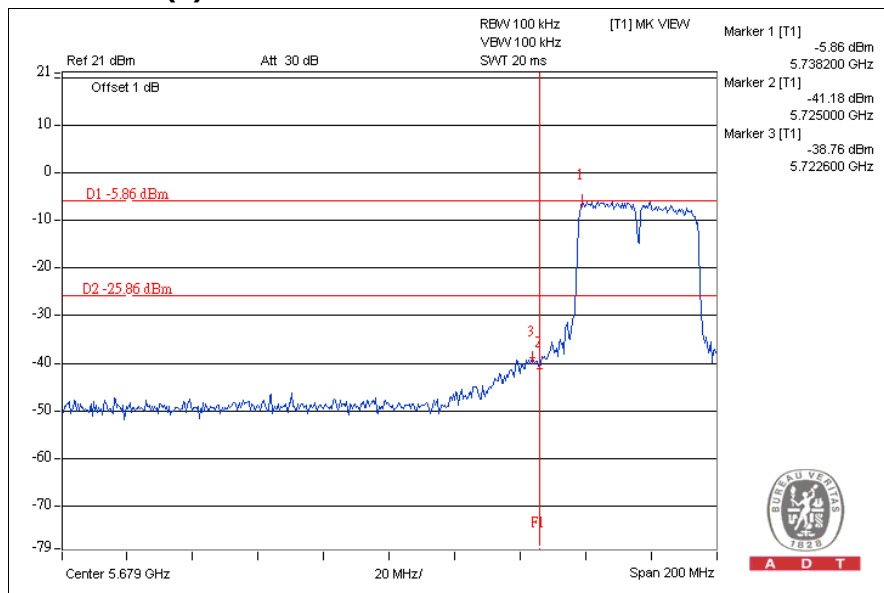


CH2

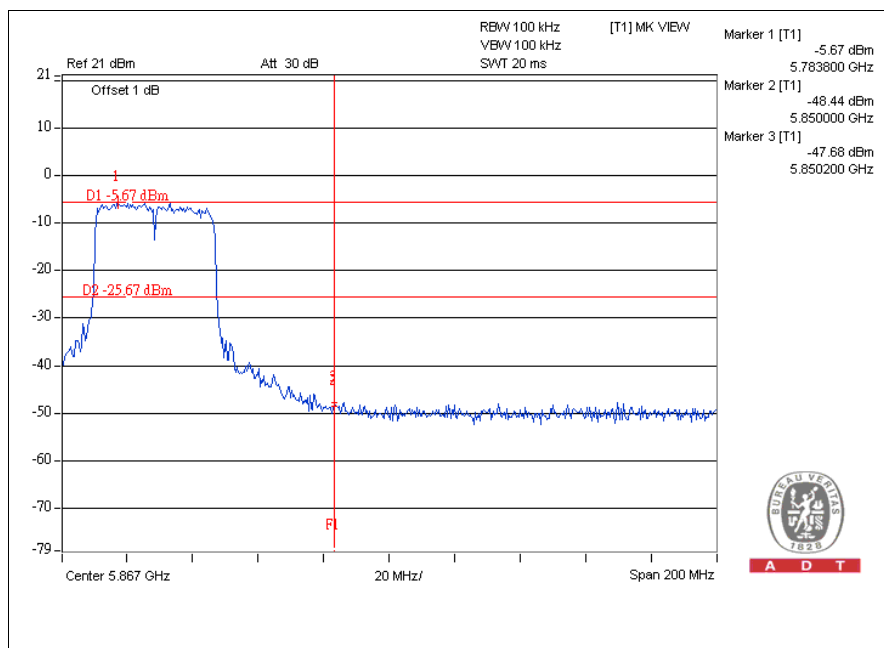


CH1

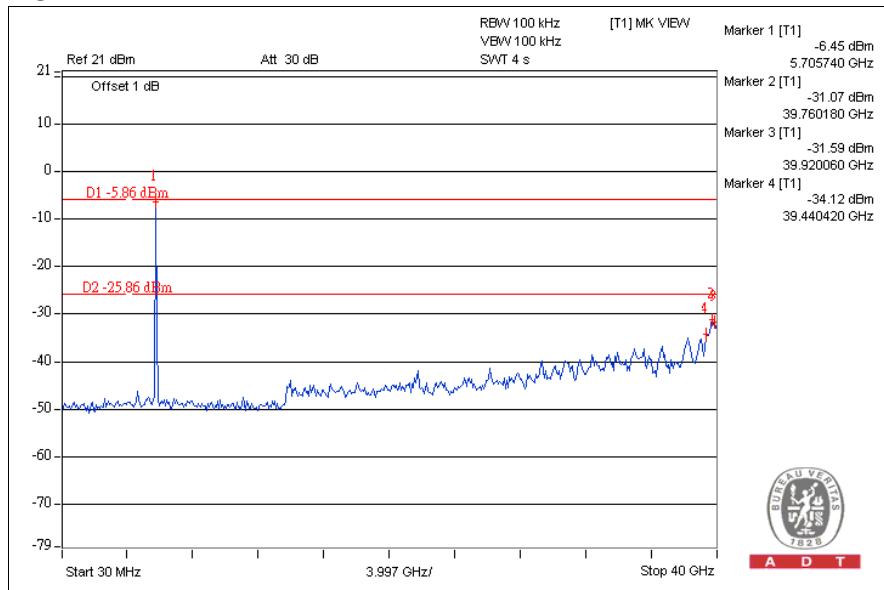


CH2

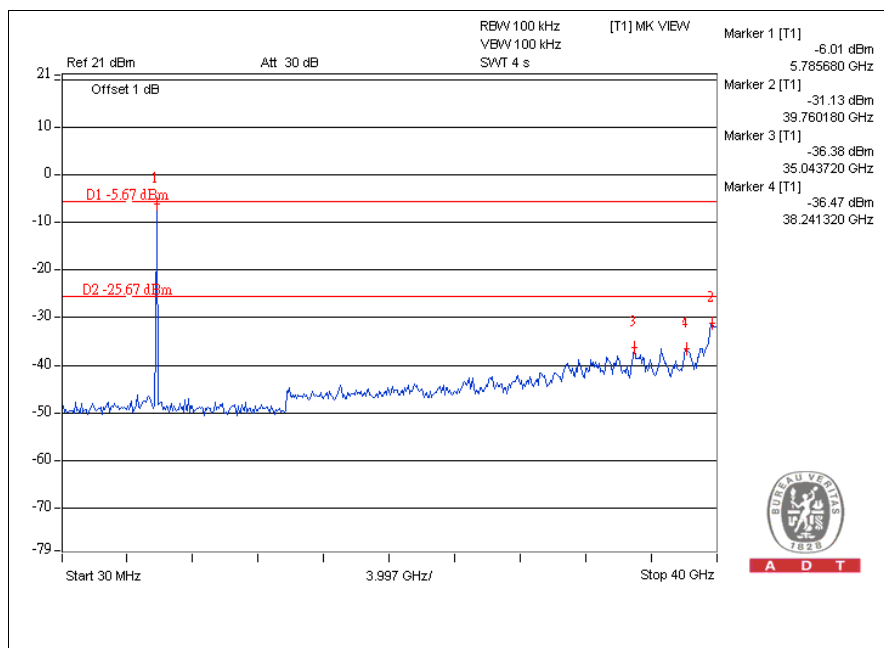


For chain (1) :CH1

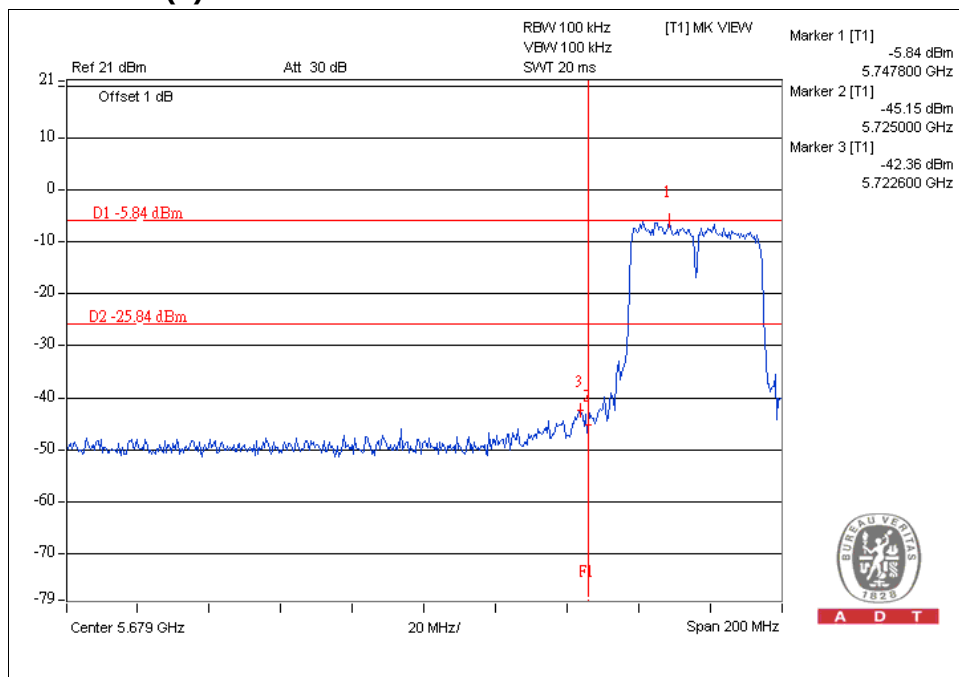


CH2

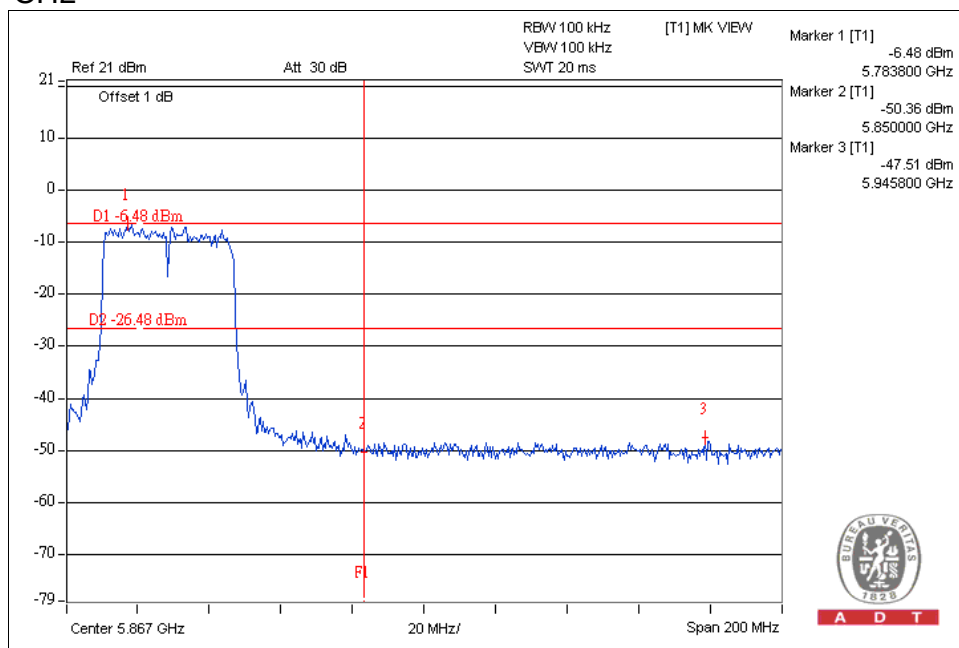

CH1

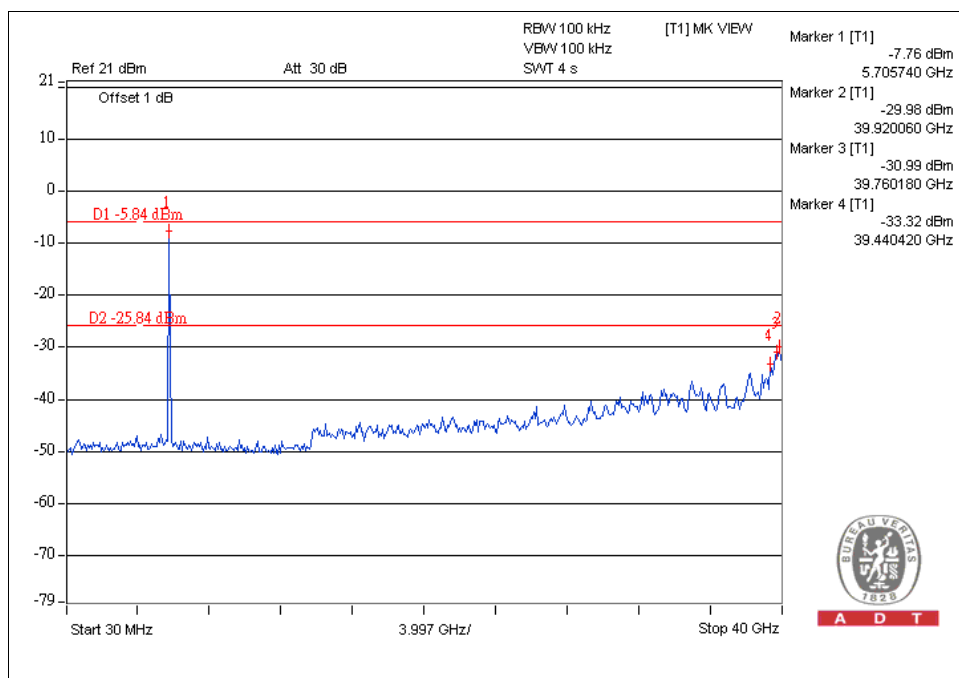

CH2

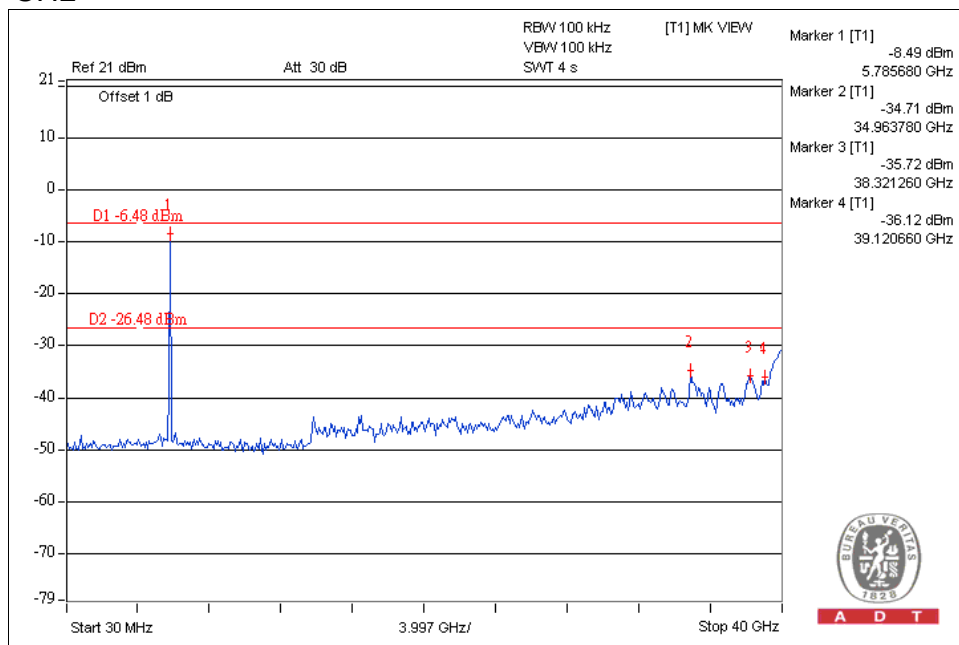

5.7 ANTENNA REQUIREMENT

5.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.7.2 ANTENNA CONNECTED CONSTRUCTION

There two antennas provided to this EUT, please refer to the following table:

Transmitter Circuit	Antenna Type	For 2.4GHz Gain (dBi)	For 5.15~5.25GHz Gain (dBi)	For 5.25~5.47GHz Gain (dBi)	For 5.47~5.725GHz Gain (dBi)	For 5.725~5.85GHz Gain (dBi)	Antenna Connector
Chain(0)	PCB	-1.98	-0.85	-0.61	0.6	0.57	NA
Chain(1)	PCB	-2.46	-0.51	0.83	1.07	1.08	NA

6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, UL
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also

7.APPENDIX-A- MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---