



FCC TEST REPORT

According to

FCC CFR Title 47 Part 15 Subpart C

Applicant	: ZyXEL Communications Corporation
Address	: No.2, Gongye E. 9th Road, Hsinchu Science Park, Hsinchu, Taiwan, R.O.C.
Equipment	: Wireless N VDSL2 4-ports Gateway with USB
Model No.	: DSL-401HNU-T1C v2;VMG1312-T10C DSL-401HNU-T3C v2;VMG1312-T30C
Brand Name	: ZyXEL
FCC ID	: I88VMG1312T10C

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of **Cerpass Technology Corp.** the test report shall not be reproduced except in full.
- The test report must not be used by the clients to claim product certification approval by **NVLAP** or any agency of the Government.




Table of Contents

1. Report of Measurements and Examinations	6
1.1 List of Measurements and Examinations	6
2. Test Configuration of Equipment under Test	7
2.1 Feature of Equipment under Test	7
2.2 Carrier Frequency of Channels	8
2.3 Test Manner	13
2.4 Description of Test System	14
2.5 General Information of Test	15
2.6 Measurement Uncertainty	15
3. Antenna Requirements	16
3.1 Standard Applicable	16
3.2 Antenna Construction and Directional Gain	16
4. Test of Conducted Emission	17
4.1 Test Limit	17
4.2 Test Procedures	17
4.3 Typical Test Setup	18
4.4 Measurement Equipment	18
4.5 Test Result and Data	19
5. Test of Radiated Emission	21
5.1 Test Limit	21
5.2 Test Procedures	21
5.3 Typical Test Setup	22
5.4 Measurement Equipment	23
5.5 Test Result and Data	24
6. Occupied Bandwidth	36
6.1 Test Limit	49
6.2 Test Procedures	49
6.3 Test Setup Layout	49
6.4 Measurement Equipment	49
6.5 Test Result and Data	50
7. Maximum Peak Output Power	62
7.1 Test Limit	62
7.2 Test Procedure	62
7.3 Test Setup Layout	62
7.4 Measurement Equipment	62
7.5 Test Result and Data	63
8. Band Edges Measurement	66
8.1 Test Limit	66



8.2	Test Procedure	66
8.3	Test Setup Layout.....	66
8.4	Measurement Equipment	66
8.5	Test Result and Data	67
8.6	Restrict Band Emission Measurement Data.....	80
9.	Power Spectral Density	85
9.1	Test Limit.....	86
9.2	Test Procedure	86
9.3	Test Setup Layout.....	86
9.4	Measurement Equipment	86
9.5	Test Result and Data	87
10.	Restricted Bands of Operation	99
10.1	Labeling Requirement	99

[illegible]



FCC TEST REPORT

according to

FCC CFR Title 47 Part 15 Subpart C

Applicant	: ZyXEL Communications Corporation
Address	: No.2, Gongye E. 9th Road, Hsinchu Science Park, Hsinchu, Taiwan, R.O.C.
Equipment	: Wireless N VDSL2 4-ports Gateway with USB
Model No.	: DSL-401HNU-T1C v2;VMG1312-T10C DSL-401HNU-T3C v2;VMG1312-T30C
Brand Name	: ZyXEL
FCC ID	: I88VMG1312T10C

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 – 2009** and the energy emitted by this equipment was **passed** **CISPR PUB. 22 and FCC Part 15** in both radiated and conducted emission class B limits. Testing was carried out on Jun 20, 2014 at **CerpPASS Technology Corp.**

Signature

Miro Chueh/ Technical director



1. Report of Measurements and Examinations

1.1 List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	Pass
15.207	. Conducted Emission	Pass
15.209 15.247(d)	. Radiated Emission	Pass
15.247(a)(2)	. 6dB Bandwidth	Pass
15.247(b)	. Maximum Peak Output Power	Pass
15.247(d)	. 100kHz Bandwidth of Frequency Band Edges	Pass
15.247(e)	. Power Spectral Density	Pass
1.1307 1.1310 2.1091 2.1093	. RF Exposure Compliance	Pass



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Product name	Model No.	
Wireless N VDSL2 4-ports Gateway with USB	DSL-401HNU-T1C v2;VMG1312-T10C; DSL-401HNU-T3C v2;VMG1312-T30C	
Adapter	Model No.: ADS012PM-B 120100	
	Input:	100-240V~50-60Hz, 0.5A
	Output:	12V $\overline{\text{---}}$ 1.0A

WLAN		
Spreading	802.11b: CCK, DQPSK, DBPSK 802.11g: 64 QAM, 16 QAM, QPSK, BPSK 802.11n: BPSK, QPSK, 16QAM, 64QAM	
Frequency Range	802.11b/g/n(20MHz): 2412-2462MHz 802.11n(40MHz): 2422-2452MHz	
Number of Channels	802.11b/g/n (20MHz):11 802.11n (40MHz): 7	
Data Rate	802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0~MCS15	
Antenna	Antenna 1 Dipole (4.4 dBi) Antenna 2 PIFA (3.7 dBi)	
IC Chipset	Model No.:	ECONET,MT7510



2.2 Carrier Frequency of Channels

For 2.4G 802.11b, 802.11g, 802.11n (20MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437	---	---

For 2.4G 802.11n (40MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	---	08	2447
02	---	09	2452
03	2422	---	---
04	2427	---	---
05	2432	---	---
06	2437	---	---
07	2442	---	---



2.3 The power level setting for 802.11b/g/n is used with ART software offered by the manufactory.

Mode 1	Frequency (MHz)	ART Setting	
		Ant 1	Ant 2
802.11b	2412	18	21
	2437	18	22
	2462	18	23
802.11g	2412	18	21
	2437	18	22
	2462	18	23
802.11n20	2412	18	21
	2437	18	22
	2462	18	23
802.11n40	2422	18	21
	2437	18	22
	2452	18	23




2.4 Duty cycle

Test Item	Duty cycle
Test Date	2014-03-26

Mode	Frequency (MHz)	Measurement (%)
b	2437	99
g	2437	99
n(20MHz)	2437	99
n(20MHz)	2437	99

Transmit at channel 6 by 802.11b

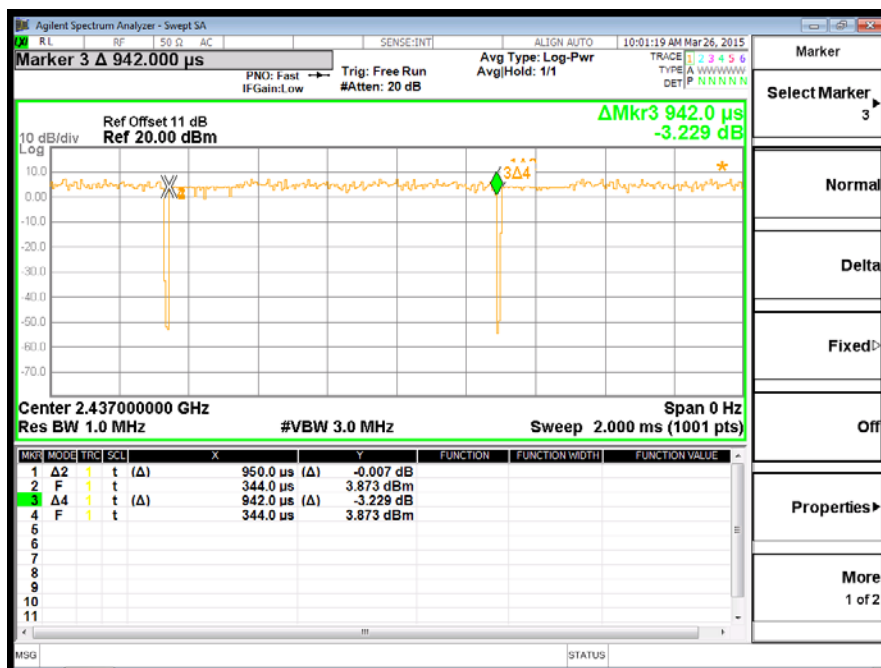




Transmit at channel 6 by 802.11g





Transmit at channel 6 by 802.11n(20MHz)

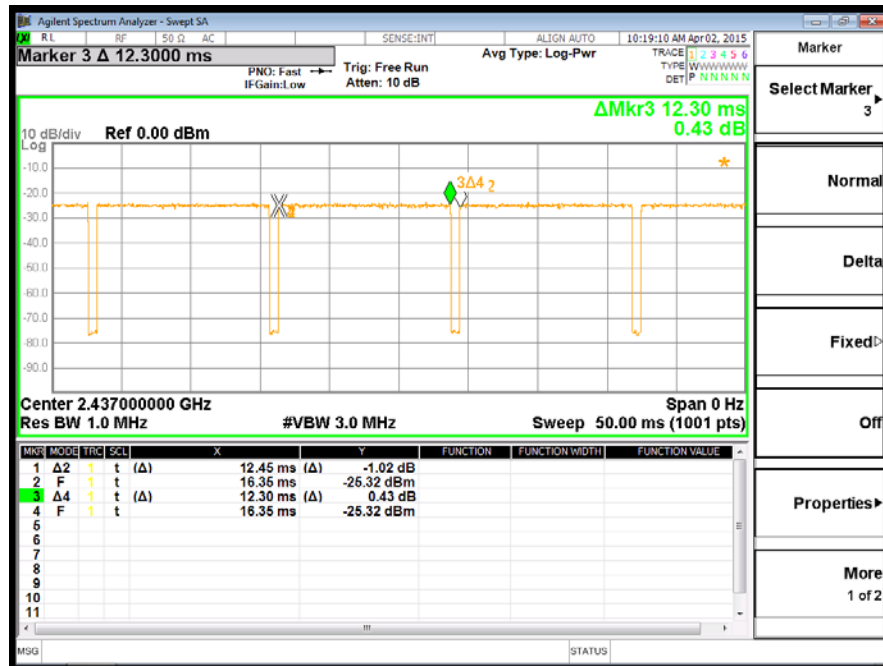

Transmit at channel 6 by 802.11 n(40MHz)





2.5 Test Manner

Test Manner	
a	During testing, the interface cables and equipment positions were varied according to 47 CFR, Part 2, Part 15
b	Adjust the EUT at the test mode and the test channel. Then test.
The test modes:	
The EUT transmitting and receiving with one antenna working at b/g/n mode. The chip set MT6627 supports 802.11 b/g/n configuration was finally used in this report. The worst-case data rates are determined to be as follows for each mode based on investigation by measuring the average power, peak power and PPSD across all data rates, bandwidths, and modulations. The worst-case data rates: IEEE802.11b mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing. IEEE802.11g mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing. IEEE 802.11n Standard-20 MHz Channel mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with MCS0 data rate were chosen for full testing. IEEE 802.11n Wide-40 MHz Channel mode: Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with MCS0 data rate were chosen for full testing. Then, the EUT configuration and cable configuration of the above highest emission mode was recorded for all final test items.	

**2.6 Description of Test System**

No	Device	Manufacturer	Model No.	Description
N/A	N/A	N/A	N/A	N/A

Use Cable:

No.	Cable	Quantity	Description
N/A	N/A	N/A	N/A



2.7 General Information of Test

Test Site:	CerpPASS Technology Corp.
Performand Location :	No.66,Tangzhuang Road, Suzhou Industrial Park, Jiangsu 215006, China
NVLAP LAB Code :	200814-0
FCC Registration Number :	916572, 331395
IC Registration Number :	7290A-1, 7290A-2
VCCI Registration Number :	T-343 for Telecommunication Test C-2919 for Conducted emission test R-2670 for Radiated emission test below 1GHz G-227 for Radiated emission test above 1GHz

Laboratory accreditation



2.8 Measurement Uncertainty

Measurement Item	Measurement Frequency	Polarization	Uncertainty
Conducted Emission	9 kHz ~ 30 MHz	LINE/NEUTRAL	±2.71 dB
Radiated Emission	30 MHz ~ 25GHz	Vertical	±4.11 dB
		Horizontal	±4.10 dB
Occupied Bandwidth	---	---	±7500 Hz
Maximum Peak Output Power	---	---	±1.4 dB
Band Edges	---	---	±2.2 dB
Power Spectral Density	---	---	±2.2 dB



3. Antenna Requirements

3.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

3.2 Antenna Construction and Directional Gain

Antenna	Antenna 1	Dipole	(4.4 dBi)
	Antenna 2	PIFA	(3.7 dBi)



4. Test of Conducted Emission

4.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2009 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50

*Decreases with the logarithm of the frequency.

4.2 Test Procedures

The EUT was setup according to ANSI C63.4, 2003 and tested according to DTS test procedure of Oct 2014 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)


Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.



4.3 Typical Test Setup

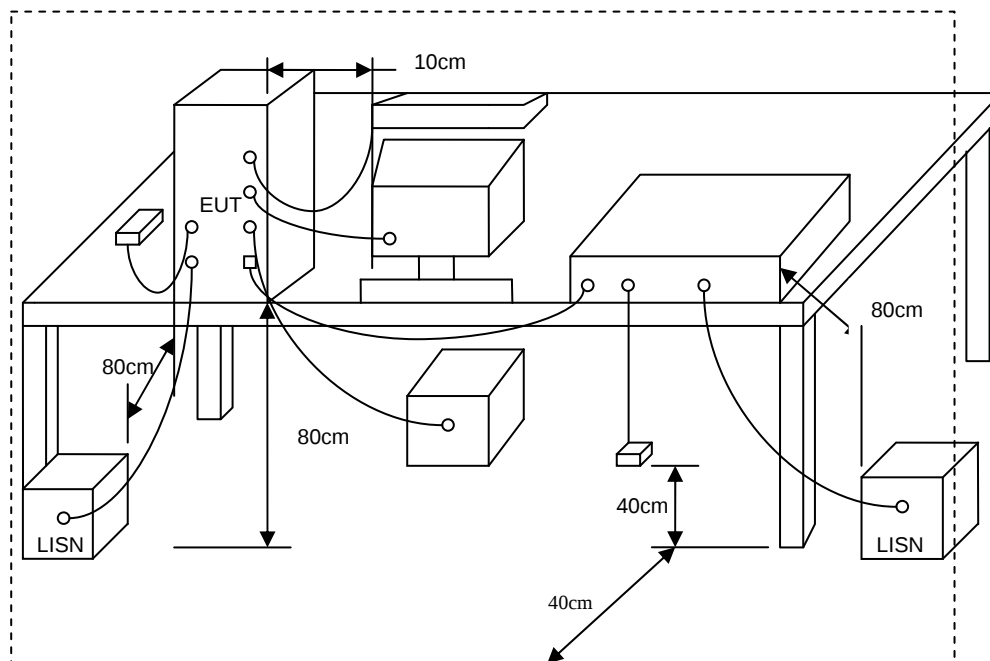


4.4 Measurement Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Test Receiver	R&S	ESCI	100565	2014.03.24	2015.03.23
AMN	R&S	ESH2-Z5	100182	2013.09.11	2014.09.10
Two-Line V-Network	R&S	ENV216	100325	2013.12.04	2014.12.03
ISN	FCC	FCC-TLISN-T 2-02	20379	2014.03.24	2015.03.23
ISN	FCC	FCC-TLISN-T 4-02	20380	2014.03.24	2015.03.23
ISN	FCC	FCC-TLISN-T 8-02	20381	2014.03.24	2015.03.23
ISN	TESEQ	ISN ST08	30175	2014.03.24	2015.03.23
Current Probe	R&S	EZ-17	100303	2014.04.04	2015.04.03
Passive Voltage Probe	R&S	ESH2-Z3	100026	2014.03.24	2015.03.23
Pulse Limiter	R&S	ESH3-Z2	100529	2014.03.24	2015.03.23
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-004	2014.03.31	2015.03.30



4.5 Test Result and Data

Test Mode :	Mode 1: Normal Operation with wifi on		
AC Power :	AC 120V/60Hz	Phase :	LINE
Temperature :	22°C	Humidity :	50%
Pressure(mbar) :	1002	Date:	2014/06/12

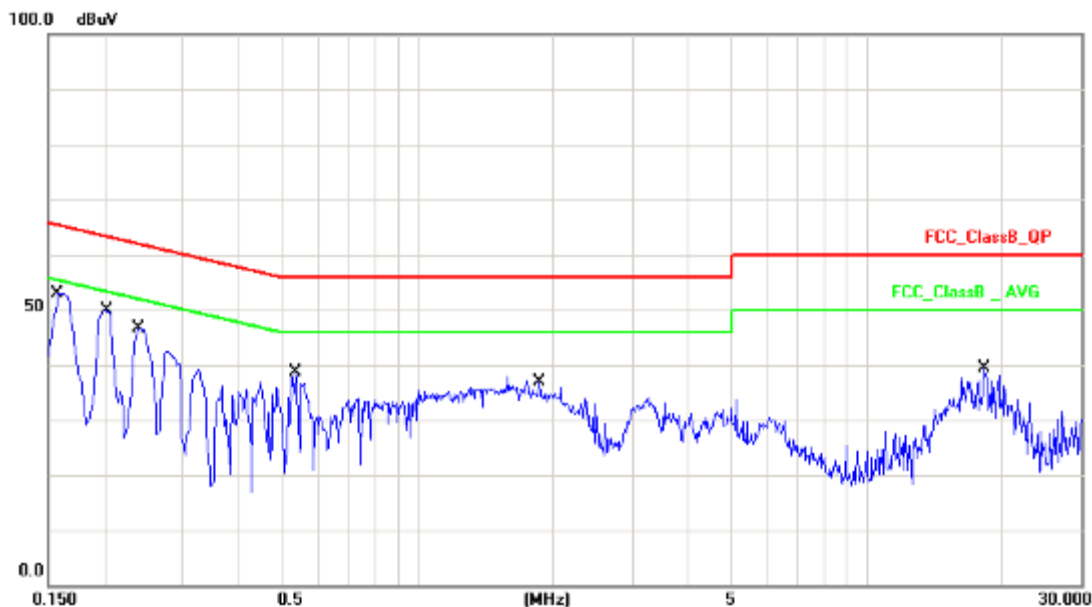


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	10.13	40.61	50.74	65.56	-14.82	QP
2	0.1580	10.13	27.49	37.62	55.56	-17.94	AVG
3	0.2020	10.12	37.07	47.19	63.52	-16.33	QP
4	0.2020	10.12	25.30	35.42	53.52	-18.10	AVG
5	0.2380	10.12	33.92	44.04	62.16	-18.12	QP
6	0.2380	10.12	21.20	31.32	52.16	-20.84	AVG
7	0.5340	10.16	24.90	35.06	56.00	-20.94	QP
8	0.5340	10.16	11.42	21.58	46.00	-24.42	AVG
9	1.8620	10.17	21.87	32.04	56.00	-23.96	QP
10	1.8620	10.17	10.82	20.99	46.00	-25.01	AVG
11	18.2460	10.40	25.76	36.16	60.00	-23.84	QP
12	18.2460	10.40	20.12	30.52	50.00	-19.48	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 1: Normal Operation with wifi on		
AC Power :	AC 120V/60Hz	Phase :	NEUTRAL
Temperature :	22°C	Humidity :	50%
Pressure(mbar) :	1002	Date:	2014/06/12

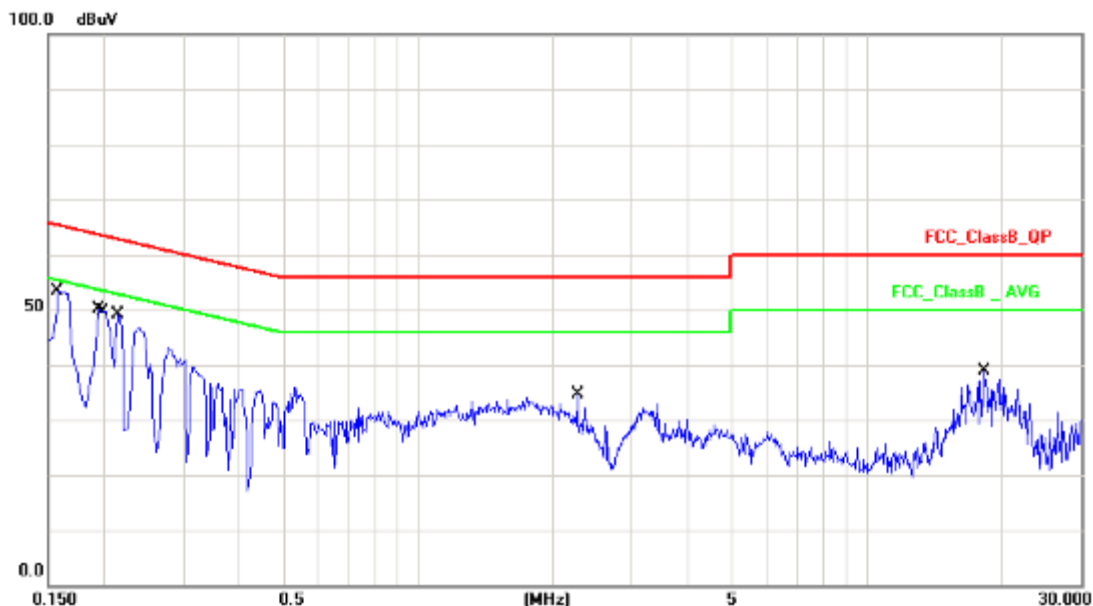

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	10.13	34.82	44.95	65.56	-20.61	QP
2	0.1580	10.13	19.76	29.89	55.56	-25.67	AVG
3	0.1940	10.13	37.67	47.80	63.86	-16.06	QP
4	0.1940	10.13	23.26	33.39	53.86	-20.47	AVG
5	0.1997	10.13	37.64	47.77	63.62	-15.85	QP
6	0.1997	10.13	24.26	34.39	53.62	-19.23	AVG
7	0.2140	10.13	29.62	39.75	63.04	-23.29	QP
8	0.2140	10.13	6.06	16.19	53.04	-36.85	AVG
9	2.2659	10.19	14.22	24.41	56.00	-31.59	QP
10	2.2659	10.19	4.73	14.92	46.00	-31.08	AVG
11	18.2420	10.47	25.99	36.46	60.00	-23.54	QP
12	18.2420	10.47	19.97	30.44	50.00	-19.56	AVG

Note: Measurement Level = Reading Level + Correct Factor



5. Test of Radiated Emission

5.1 Test Limit

Radiated emissions from 9 KHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2003. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions. For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

FREQUENCIES(MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the below table.

Frequency (MHz)	Distance Meters	Radiated (dB μ V/ m)
30-230	10	30
230-1000	10	37

5.2 Test Procedures


- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.




- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.3 Typical Test Setup

Below 1GHz Test Setup

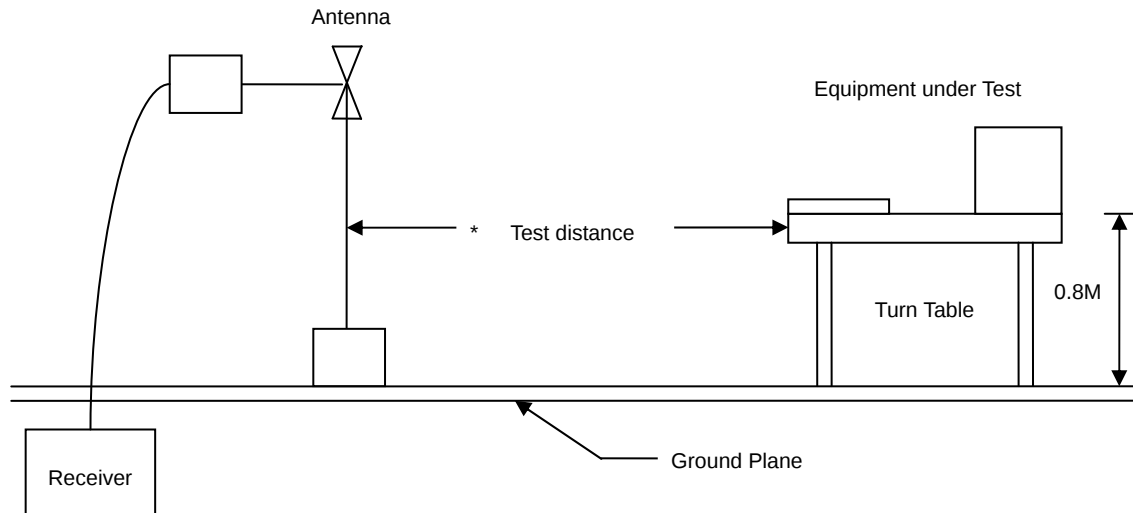

Above 1GHz Test Setup

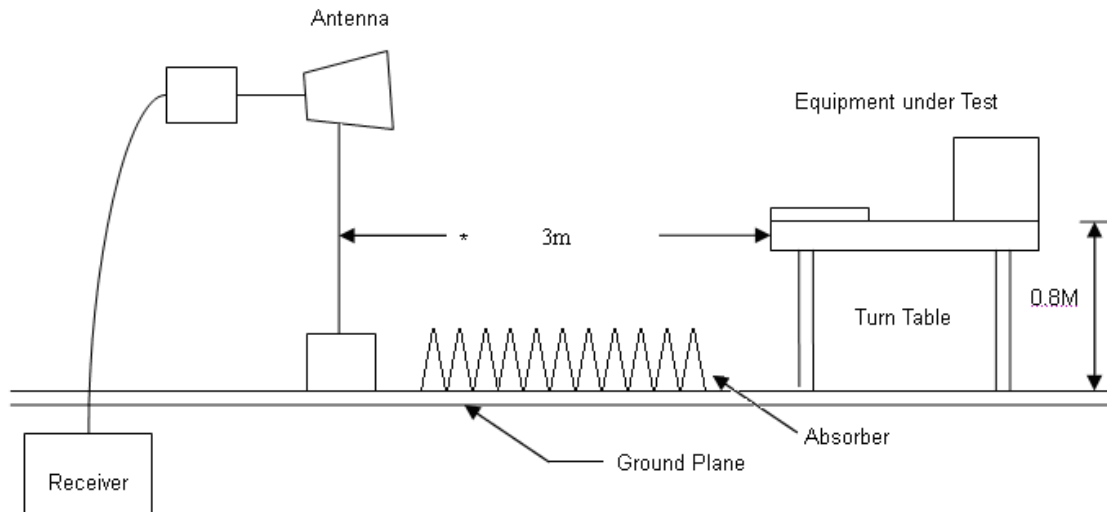



5.4 Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
EMI Test Receiver	R&S	ESCI	100563	2014.02.10	2015.02.09
H64 Preamplifier	HP	8447F	3113A05582	2014.03.24	2015.03.23
Preamplifier	Agilent	8449B	3008A02342	2014.03.24	2015.03.23
Ultra Broadband Antenna	R&S	HL562	100362	2014.05.24	2015.05.23
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-619	2014.05.24	2015.05.23
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	9170-348	2013.11.04	2014.11.03
Spectrum Analyzer	R&S	FSP40	100324	2014.03.23	2015.03.24
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-002	2014.03.31	2015.03.30



5.5 Test Result and Data

The 9kHz-30MHz spurious emission is under limit 20dB more.

5.5.1 Test Result and Data of Transmitter

Under 1G :

Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Normal Link

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	333.6100	-6.47	40.17	33.70	46.00	-12.30	QP	H
2	375.3200	-6.97	46.67	39.70	46.00	-6.30	QP	H
3	667.2900	-1.94	31.54	29.60	46.00	-16.40	QP	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	500.4500	-4.85	37.65	32.80	46.00	-13.20	QP	V
2	667.2900	-1.94	32.94	31.00	46.00	-15.00	QP	V
3	897.1800	2.22	34.08	36.30	46.00	-9.70	QP	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. Factor = Antenna Factor + Cable Loss – Amplifier
For example: 897MHz(2.22=23.3 + 4.1–25.18)



Above 1G Ant 1:

Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Transmit by 802.11b (2412MHz)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4824.000	4.24	40.62	44.86	74.00	-29.14	peak	H
2	4824.000	4.24	33.74	37.98	54.00	-16.02	AVG	H
3	7236.000	8.74	40.17	48.91	74.00	-25.09	peak	H
4	7236.000	8.74	34.22	42.96	54.00	-11.04	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4824.000	4.24	39.15	43.39	74.00	-30.61	peak	V
2	4824.000	4.24	33.21	37.45	54.00	-16.55	AVG	V
3	7236.000	8.74	40.88	49.62	74.00	-24.38	peak	V
4	7236.000	8.74	34.65	43.39	54.00	-10.61	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. Factor = Antenna Factor + Cable Loss – Amplifier
For example: 4824MHz(4.24=30.8+7.34-33.9)



Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Transmit by 802.11b (2437MHz)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	4.09	40.84	44.93	74.00	-29.07	peak	H
2	4874.000	4.09	31.24	35.33	54.00	-18.67	AVG	H
3	7311.000	8.96	40.62	49.58	74.00	-24.42	peak	H
4	7311.000	8.96	33.65	42.61	54.00	-11.39	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	4.09	36.84	40.93	74.00	-33.07	peak	V
2	4874.000	4.09	29.87	33.96	54.00	-20.04	AVG	V
3	7311.000	8.96	39.41	48.37	74.00	-25.63	peak	V
4	7311.000	8.96	33.48	42.44	54.00	-11.56	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. Factor = Antenna Factor + Cable Loss – Amplifier
For example: 4824MHz(4.24=30.8+7.34-33.9)



Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Transmit by 802.11b (2462MHz)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4924.000	4.18	42.69	46.87	74.00	-27.13	peak	H
2	4924.000	4.18	35.84	40.02	54.00	-13.98	AVG	H
3	7386.000	9.07	39.88	48.95	74.00	-25.05	peak	H
4	7386.000	9.07	33.54	42.61	54.00	-11.39	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4924.000	4.18	45.3	49.48	74.00	-24.52	peak	V
2	4924.000	4.18	36.18	40.36	54.00	-13.64	AVG	V
3	7386.000	9.07	41.56	50.63	74.00	-23.37	peak	V
4	7386.000	9.07	33.1	42.17	54.00	-11.83	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. Factor = Antenna Factor + Cable Loss – Amplifier
For example: 4824MHz(4.24=30.8+7.34-33.9)



Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Transmit by 802.11g (2412MHz)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4824.000	4.24	39.54	43.78	74.00	-30.22	peak	H
2	4824.000	4.24	32.11	36.35	54.00	-17.65	AVG	H
3	7236.000	8.74	39.15	47.89	74.00	-26.11	peak	H
4	7236.000	8.74	33.68	42.42	54.00	-11.58	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4824.000	4.24	42.98	47.22	74.00	-26.78	peak	V
2	4824.000	4.24	35.61	39.85	54.00	-14.15	AVG	V
3	7236.000	8.74	43.88	52.62	74.00	-21.38	peak	V
4	7236.000	8.74	33.54	42.28	54.00	-11.72	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. Factor = Antenna Factor + Cable Loss – Amplifier
For example: 4824MHz(4.24=30.8+7.34-33.9)



Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Transmit by 802.11g (2437MHz)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	4.09	45.98	50.07	74	-23.93	peak	H
2	4874.000	4.09	35.67	39.76	54	-14.24	AVG	H
3	7311.000	8.96	40.21	49.17	74	-24.83	peak	H
4	7311.000	8.96	29.66	38.62	54	-15.38	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	4.09	40.35	44.44	74.00	-29.56	peak	V
2	4874.000	4.09	32.65	36.74	54.00	-17.26	AVG	V
3	7311.000	8.96	39.41	48.37	74.00	-25.63	peak	V
4	7311.000	8.96	30.29	39.25	54.00	-14.75	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. Factor = Antenna Factor + Cable Loss – Amplifier
For example: 4824MHz(4.24=30.8+7.34-33.9)



Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Transmit by 802.11g (2462MHz)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4924.000	4.18	39.84	44.02	74.00	-29.98	peak	H
2	4924.000	4.18	32.69	36.87	54.00	-17.13	AVG	H
3	7386.000	9.07	39.94	49.01	74.00	-24.99	peak	H
4	7386.000	9.07	32.64	41.71	54.00	-12.29	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	4.09	39.68	43.77	74.00	-30.23	peak	V
2	4874.000	4.09	32.64	36.73	54.00	-17.27	AVG	V
3	7386.000	9.07	40.66	49.73	74.00	-24.27	peak	V
4	7386.000	9.07	33.81	42.88	54.00	-11.12	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. Factor = Antenna Factor + Cable Loss – Amplifier
For example: 4824MHz(4.24=30.8+7.34-33.9)



Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Transmit by 802.11n (20MHz) (2412MHz)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4824.000	4.24	39.86	44.10	74.00	-29.90	peak	H
2	4824.000	4.24	34.41	38.65	54.00	-15.35	AVG	H
3	7236.000	8.74	41.39	50.13	74.00	-23.87	peak	H
4	7236.000	8.74	30.54	39.28	54.00	-14.72	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4824.000	4.24	39.29	43.53	74.00	-30.47	peak	V
2	4824.000	4.24	32.51	36.75	54.00	-17.25	AVG	V
3	7236.000	8.74	41.26	50.00	74.00	-24.00	peak	V
4	7236.000	8.74	32.28	41.02	54.00	-12.98	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. Factor = Antenna Factor + Cable Loss – Amplifier
For example: 4824MHz(4.24=30.8+7.34-33.9)



Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Transmit by 802.11n (20MHz) (2437MHz)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	4.09	39.81	43.90	74.00	-30.10	peak	H
2	4874.000	4.09	33.67	37.76	54.00	-16.24	AVG	H
3	7311.000	8.96	40.55	49.51	74.00	-24.49	peak	H
4	7311.000	8.96	32.58	41.54	54.00	-12.46	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	4.09	39.64	43.73	74.00	-30.27	peak	V
2	4874.000	4.09	34.62	38.71	54.00	-15.29	AVG	V
3	7311.000	8.96	41.76	50.72	74.00	-23.28	peak	V
4	7311.000	8.96	34.56	43.52	54.00	-10.48	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. Factor = Antenna Factor + Cable Loss – Amplifier
For example: 4824MHz(4.24=30.8+7.34-33.9)



Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Transmit by 802.11n (20MHz) (2462MHz)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4924.000	4.18	40.36	44.54	74.00	-29.46	peak	H
2	4924.000	4.18	32.14	36.32	54.00	-17.68	AVG	H
3	7386.000	9.07	39.94	49.01	74.00	-24.99	peak	H
4	7386.000	9.07	34.67	43.74	54.00	-10.26	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4924.000	4.18	39.87	44.05	74.00	-29.95	peak	V
2	4924.000	4.18	32.58	36.76	54.00	-17.24	AVG	V
3	7386.000	9.07	40.27	49.34	74.00	-24.66	peak	V
4	7386.000	9.07	32.95	42.02	54.00	-11.98	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. Factor = Antenna Factor + Cable Loss – Amplifier
For example: 4824MHz(4.24=30.8+7.34-33.9)



Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Transmit by 802.11n (40MHz) (2422MHz)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4844.000	6.46	40.32	46.78	74.00	-27.22	peak	H
2	4844.000	6.46	32.84	39.30	54.00	-14.70	AVG	H
3	7236.000	12.54	41.56	54.10	74.00	-19.90	peak	H
4	7236.000	12.54	32.74	45.28	54.00	-8.72	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4844.000	6.46	39.34	45.80	74.00	-28.20	peak	V
2	4844.000	6.46	32.09	38.55	54.00	-15.45	AVG	V
3	7236.000	12.54	42.66	55.20	74.00	-18.80	peak	V
4	7236.000	12.54	31.54	44.08	54.00	-9.92	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
 2. Measurement Level = Reading Level + Correct Factor
 3. Factor = Antenna Factor + Cable Loss – Amplifier
- For example: 4824MHz(4.24=30.8+7.34-33.9)



Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Transmit by 802.11n (40MHz) (2437MHz)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	6.54	39.45	45.99	74.00	-28.01	peak	H
2	4874.000	6.54	30.41	36.95	54.00	-17.05	AVG	H
3	7311.000	12.72	39.61	52.33	74.00	-21.67	peak	H
4	7311.000	12.72	30.94	43.66	54.00	-10.34	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	6.54	41.33	47.87	74.00	-26.13	peak	V
2	4874.000	6.54	31.65	38.19	54.00	-15.81	AVG	V
3	7311.000	12.72	39.84	52.56	74.00	-21.44	peak	V
4	7311.000	12.72	31.52	44.24	54.00	-9.76	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. Factor = Antenna Factor + Cable Loss – Amplifier
For example: 4824MHz(4.24=30.8+7.34-33.9)



Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Transmit by 802.11n (40MHz) (2452MHz)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4904.000	6.61	40.51	47.12	74.00	-26.88	peak	H
2	4904.000	6.61	32.51	39.12	54.00	-14.88	AVG	H
3	7356.000	12.83	38.49	51.32	74.00	-22.68	peak	H
4	7356.000	12.83	32.61	45.44	54.00	-8.56	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4904.000	6.61	41.62	48.23	74.00	-25.77	peak	V
2	4904.000	6.61	32.05	38.66	54.00	-15.34	AVG	V
3	7356.000	12.83	41.65	54.48	74.00	-19.52	peak	V
4	7356.000	12.83	32.66	45.49	54.00	-8.510	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. Factor = Antenna Factor + Cable Loss – Amplifier
For example: 4824MHz(4.24=30.8+7.34-33.9)



Above 1G Ant 2:

Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Transmit by 802.11b (2412MHz)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4824.000	4.24	40.27	44.51	74.00	-29.49	peak	H
2	4824.000	4.24	32.01	36.25	54.00	-17.75	AVG	H
3	7236.000	8.74	41.99	50.73	74.00	-23.27	peak	H
4	7236.000	8.74	35.48	44.22	54.00	-9.78	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4824.000	4.24	40.28	44.52	74.00	-29.48	peak	V
2	4824.000	4.24	34.62	38.86	54.00	-15.14	AVG	V
3	7236.000	8.74	39.67	48.41	74.00	-25.59	peak	V
4	7236.000	8.74	33.25	41.99	54.00	-12.01	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. Factor = Antenna Factor + Cable Loss – Amplifier
For example: 4824MHz(4.24=30.8+7.34-33.9)



Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Transmit by 802.11b (2437MHz)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	4.09	41.62	45.71	74.00	-28.29	peak	H
2	4874.000	4.09	32.02	36.11	54.00	-17.89	AVG	H
3	7311.000	8.96	39.65	48.61	74.00	-25.39	peak	H
4	7311.000	8.96	32.71	41.67	54.00	-12.33	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	4.09	38.69	42.78	74.00	-31.22	peak	V
2	4874.000	4.09	30.54	34.63	54.00	-19.37	AVG	V
3	7311.000	8.96	40.33	49.29	74.00	-24.71	peak	V
4	7311.000	8.96	34.67	43.63	54.00	-10.37	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. Factor = Antenna Factor + Cable Loss – Amplifier
For example: 4824MHz(4.24=30.8+7.34-33.9)



Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Transmit by 802.11b (2462MHz)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4924.000	4.18	41.31	45.49	74.00	-28.51	peak	H
2	4924.000	4.18	34.75	38.93	54.00	-15.07	AVG	H
3	7386.000	9.07	40.62	49.69	74.00	-24.31	peak	H
4	7386.000	9.07	34.07	43.14	54.00	-10.86	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4924.000	4.18	44.61	48.79	74.00	-25.21	peak	V
2	4924.000	4.18	35.64	39.82	54.00	-14.18	AVG	V
3	7386.000	9.07	40.98	50.05	74.00	-23.95	peak	V
4	7386.000	9.07	33.61	42.68	54.00	-11.32	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. Factor = Antenna Factor + Cable Loss – Amplifier
For example: 4824MHz(4.24=30.8+7.34-33.9)



Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Transmit by 802.11g (2412MHz)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4824.000	4.24	40.68	44.92	74.00	-29.08	peak	H
2	4824.000	4.24	33.46	37.70	54.00	-16.30	AVG	H
3	7236.000	8.74	40.21	48.95	74.00	-25.05	peak	H
4	7236.000	8.74	34.38	43.12	54.00	-10.88	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4824.000	4.24	42.84	47.08	74	-26.92	peak	V
2	4824.000	4.24	36.21	40.45	54	-13.55	AVG	V
3	7236.000	8.74	42.61	51.35	74.00	-22.65	peak	V
4	7236.000	8.74	32.16	40.90	54.00	-13.10	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. Factor = Antenna Factor + Cable Loss – Amplifier
For example: 4824MHz(4.24=30.8+7.34-33.9)



Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Transmit by 802.11g (2437MHz)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	4.09	44.81	48.9	74.00	-25.10	peak	H
2	4874.000	4.09	38.42	42.51	54.00	-11.49	AVG	H
3	7311.000	8.96	33.56	42.52	74.00	-31.48	peak	H
4	7311.000	8.96	27.33	36.29	54.00	-17.71	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	4.09	40.36	44.45	74.00	-29.55	peak	V
2	4874.000	4.09	31.45	35.54	54.00	-18.46	AVG	V
3	7311.000	8.96	40.24	49.2	74.00	-24.80	peak	V
4	7311.000	8.96	31.46	40.42	54.00	-13.58	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. Factor = Antenna Factor + Cable Loss – Amplifier
For example: 4824MHz(4.24=30.8+7.34-33.9)



Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Transmit by 802.11g (2462MHz)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4924.000	4.18	40.78	44.96	74.00	-29.04	peak	H
2	4924.000	4.18	31.64	35.82	54.00	-18.18	AVG	H
3	7386.000	9.07	40.31	49.38	74.00	-24.62	peak	H
4	7386.000	9.07	31.96	41.03	54.00	-12.97	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	4.09	39.67	43.76	74.00	-30.24	peak	V
2	4874.000	4.09	31.74	35.83	54.00	-18.17	AVG	V
3	7386.000	9.07	41.25	50.32	74.00	-23.68	peak	V
4	7386.000	9.07	32.69	41.76	54.00	-12.24	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. Factor = Antenna Factor + Cable Loss – Amplifier
For example: 4824MHz(4.24=30.8+7.34-33.9)



Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Transmit by 802.11n (20MHz) (2412MHz)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4824.000	4.24	40.19	44.43	74.00	-29.57	peak	H
2	4824.000	4.24	33.81	38.05	54.00	-15.95	AVG	H
3	7236.000	8.74	40.24	48.98	74.00	-25.02	peak	H
4	7236.000	8.74	29.63	38.37	54.00	-15.63	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4824.000	4.24	40.11	44.35	74.00	-29.65	peak	V
2	4824.000	4.24	32.51	36.75	54.00	-17.25	AVG	V
3	7236.000	8.74	42.01	50.75	74.00	-23.25	peak	V
4	7236.000	8.74	31.64	40.38	54.00	-13.62	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. Factor = Antenna Factor + Cable Loss – Amplifier
For example: 4824MHz(4.24=30.8+7.34-33.9)



Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Transmit by 802.11n (20MHz) (2437MHz)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	4.09	40.87	44.96	74.00	-29.04	peak	H
2	4874.000	4.09	32.69	36.78	54.00	-17.22	AVG	H
3	7311.000	8.96	39.18	48.14	74.00	-25.86	peak	H
4	7311.000	8.96	32.13	41.09	54.00	-12.91	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	4.09	40.32	44.41	74.00	-29.59	peak	V
2	4874.000	4.09	33.61	37.70	54.00	-16.30	AVG	V
3	7311.000	8.96	40.26	49.22	74.00	-24.78	peak	V
4	7311.000	8.96	35.17	44.13	54.00	-9.87	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. Factor = Antenna Factor + Cable Loss – Amplifier
For example: 4824MHz(4.24=30.8+7.34-33.9)



Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Transmit by 802.11n (20MHz) (2462MHz)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4924.000	4.18	41.02	45.20	74.00	-28.80	peak	H
2	4924.000	4.18	33.17	37.35	54.00	-16.65	AVG	H
3	7386.000	9.07	41.31	50.38	74.00	-23.62	peak	H
4	7386.000	9.07	33.60	42.67	54.00	-11.33	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4924.000	4.18	40.32	44.50	74.00	-29.50	peak	V
2	4924.000	4.18	32.69	36.87	54.00	-17.13	AVG	V
3	7386.000	9.07	39.21	48.28	74.00	-25.72	peak	V
4	7386.000	9.07	31.25	40.32	54.00	-13.68	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. Factor = Antenna Factor + Cable Loss – Amplifier
For example: 4824MHz(4.24=30.8+7.34-33.9)



Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Transmit by 802.11n (40MHz) (2422MHz)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4844.000	6.46	41.85	48.31	74.00	-25.69	peak	H
2	4844.000	6.46	31.62	38.08	54.00	-15.92	AVG	H
3	7236.000	12.54	40.15	52.69	74.00	-21.31	peak	H
4	7236.000	12.54	31.69	44.23	54.00	-9.77	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4844.000	6.46	40.32	46.78	74.00	-27.22	peak	V
2	4844.000	6.46	31.64	38.10	54.00	-15.90	AVG	V
3	7236.000	12.54	41.03	53.57	74.00	-20.43	peak	V
4	7236.000	12.54	30.28	42.82	54.00	-11.18	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
 2. Measurement Level = Reading Level + Correct Factor
 3. Factor = Antenna Factor + Cable Loss – Amplifier
- For example: 4824MHz(4.24=30.8+7.34-33.9)



Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Transmit by 802.11n (40MHz) (2437MHz)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	6.54	40.11	46.65	74.00	-27.35	peak	H
2	4874.000	6.54	31.25	37.79	54.00	-16.21	AVG	H
3	7311.000	12.72	39.86	52.58	74.00	-21.42	peak	H
4	7311.000	12.72	30.18	42.90	54.00	-11.10	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	6.54	40.15	46.69	74.00	-27.31	peak	V
2	4874.000	6.54	32.74	39.28	54.00	-14.72	AVG	V
3	7311.000	12.72	40.12	52.84	74.00	-21.16	peak	V
4	7311.000	12.72	30.67	43.39	54.00	-10.61	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. Factor = Antenna Factor + Cable Loss – Amplifier
For example: 4824MHz(4.24=30.8+7.34-33.9)



Engineer :Wind	Site : EMC Lab AC 102
Probe : VERTICAL/ HORIZONTAL	Time : 2015-05-21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Power : AC 120V/60Hz	Note : Transmit by 802.11n (40MHz) (2452MHz)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4904.000	6.61	41.62	48.23	74.00	-25.77	peak	H
2	4904.000	6.61	31.74	38.35	54.00	-15.65	AVG	H
3	7356.000	12.83	39.11	51.94	74.00	-22.06	peak	H
4	7356.000	12.83	31.62	44.45	54.00	-9.55	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4904.000	6.61	41.97	48.58	74.00	-25.42	peak	V
2	4904.000	6.61	33.68	40.29	54.00	-13.71	AVG	V
3	7356.000	12.83	42.55	55.38	74.00	-18.62	peak	V
4	7356.000	12.83	33.64	46.47	54.00	-7.53	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. Factor = Antenna Factor + Cable Loss – Amplifier
For example: 4824MHz(4.24=30.8+7.34-33.9)



6. Occupied Bandwidth


6.1 Test Limit

Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725- 5850 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 100KHz and $VBW \geq 3 \times RBW$.
- c. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- d. The 6dB Bandwidth was measured and recorded.

6.3 Test Setup Layout

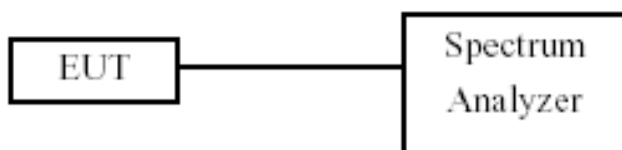

6.4 Measurement Equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	N9010A	Agilent	MY51350515	2013.09.29	2014.09.29




6.5 Test Result and Data

Test Item	Occupied Bandwidth
Test Mode	Transmit by 802.11b (Antenna 2)
Test Date	2014-6-20


Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (kHz)	Result
01	2412	11.10	500	Pass
06	2437	10.17	500	Pass
11	2462	11.13	500	Pass

Channel 01 (2412MHz)

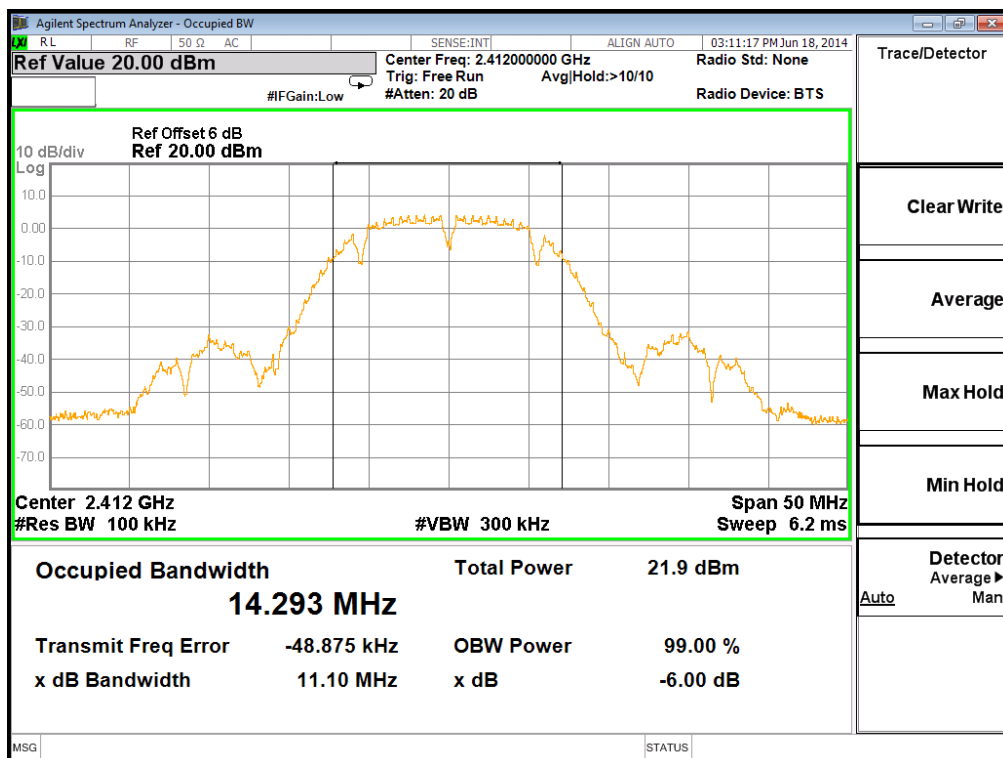




Channel 06 (2437MHz)

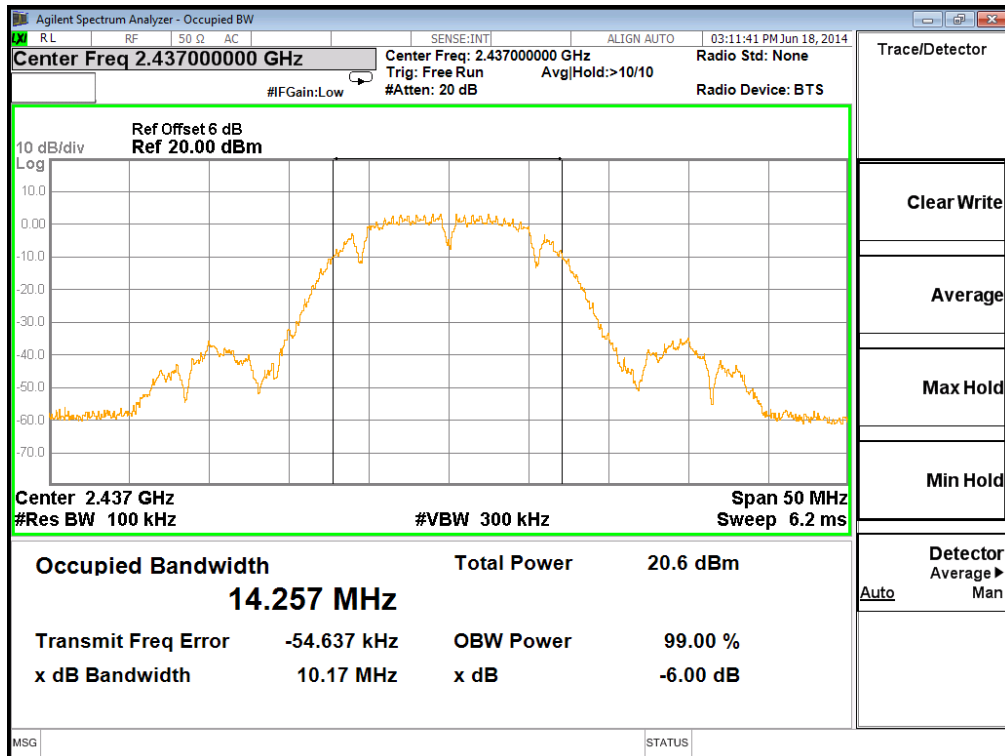

Channel11(2462MHz)

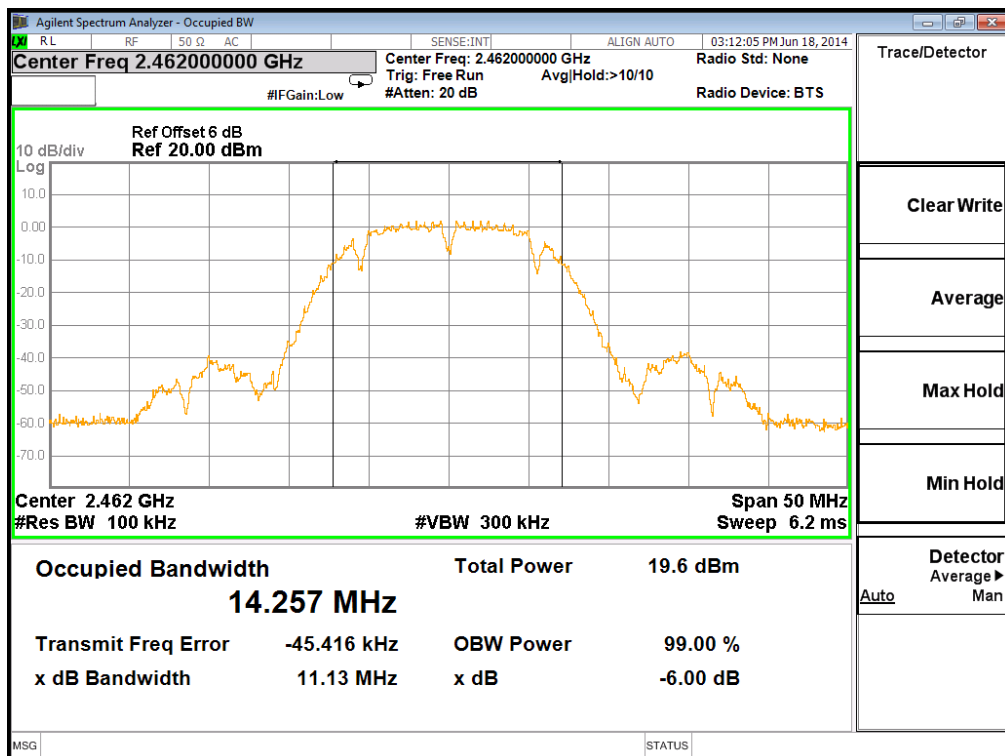




Test Item	Occupied Bandwidth
Test Mode	Transmit by 802.11g (Antenna 2)
Test Date	2014-6-20


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2412	16.34	500	Pass
06	2437	16.33	500	Pass
11	2462	16.35	500	Pass

Channel 01 (2412MHz)

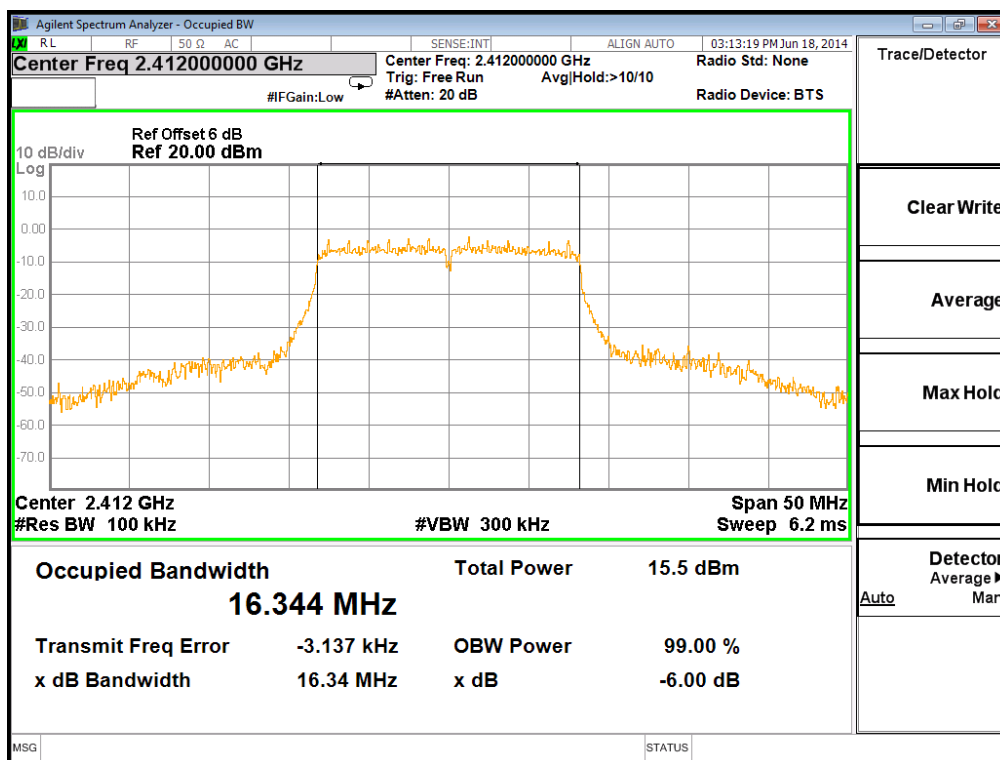




Channel 06 (2437MHz)

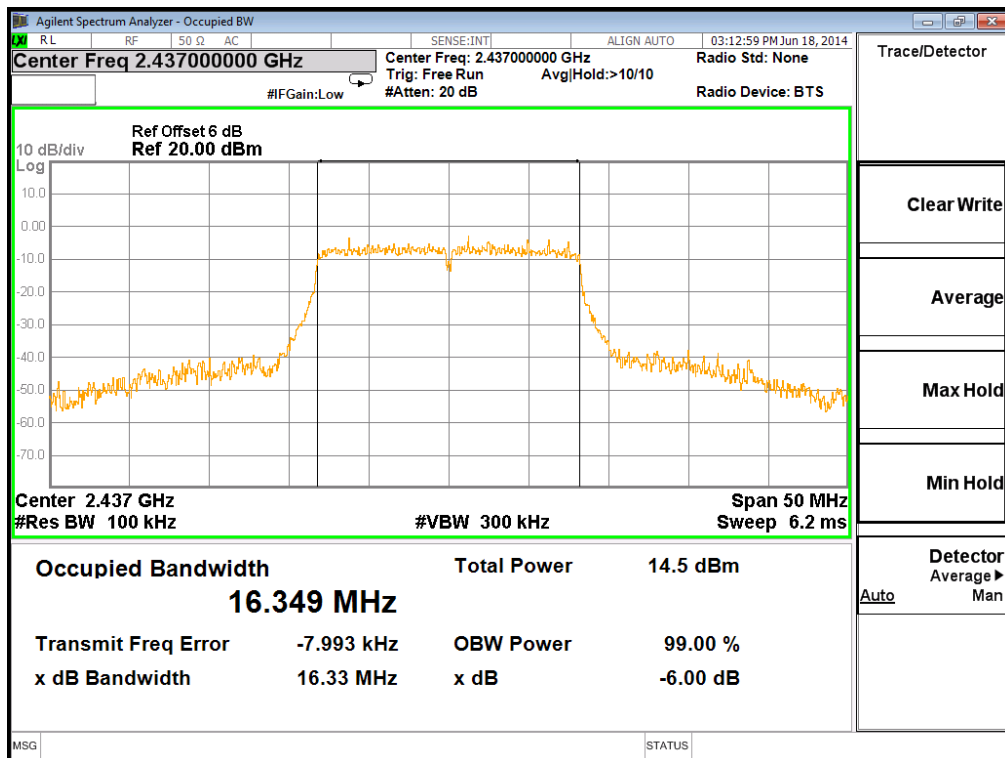

Channel 11 (2462MHz)

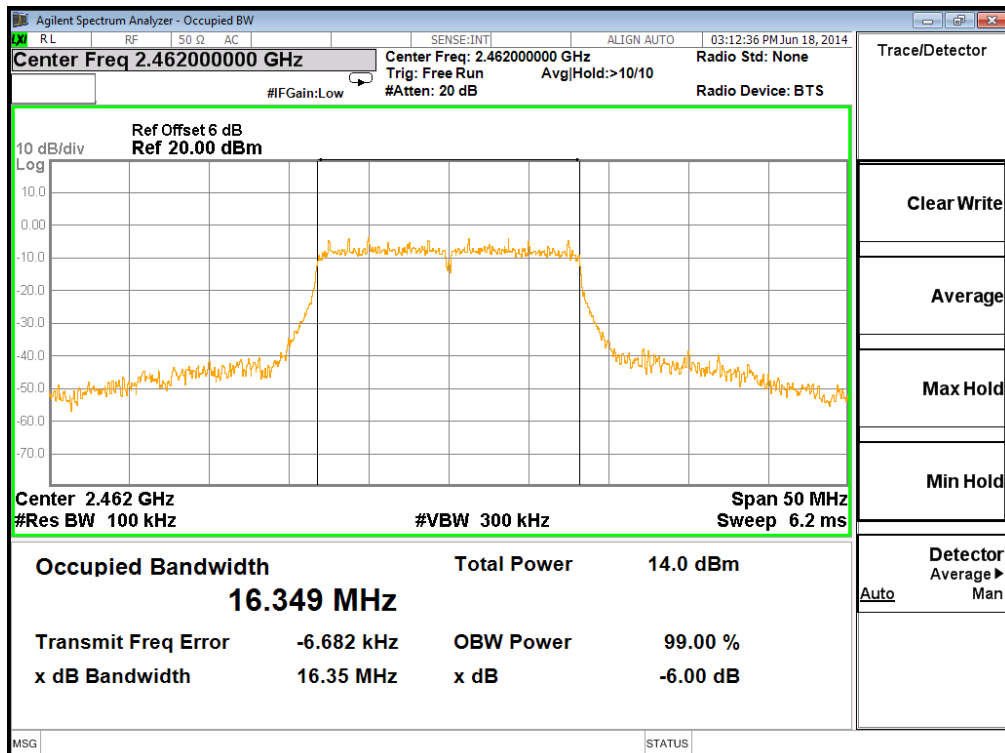




Test Item	Occupied Bandwidth
Test Mode	Transmit by 802.11n (20MHz) (Antenna 1)
Test Date	2014-06-20


Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (kHz)	Result
01	2412	16.28	500	Pass
06	2437	16.54	500	Pass
11	2462	16.32	500	Pass

Channel 01 (2412MHz)

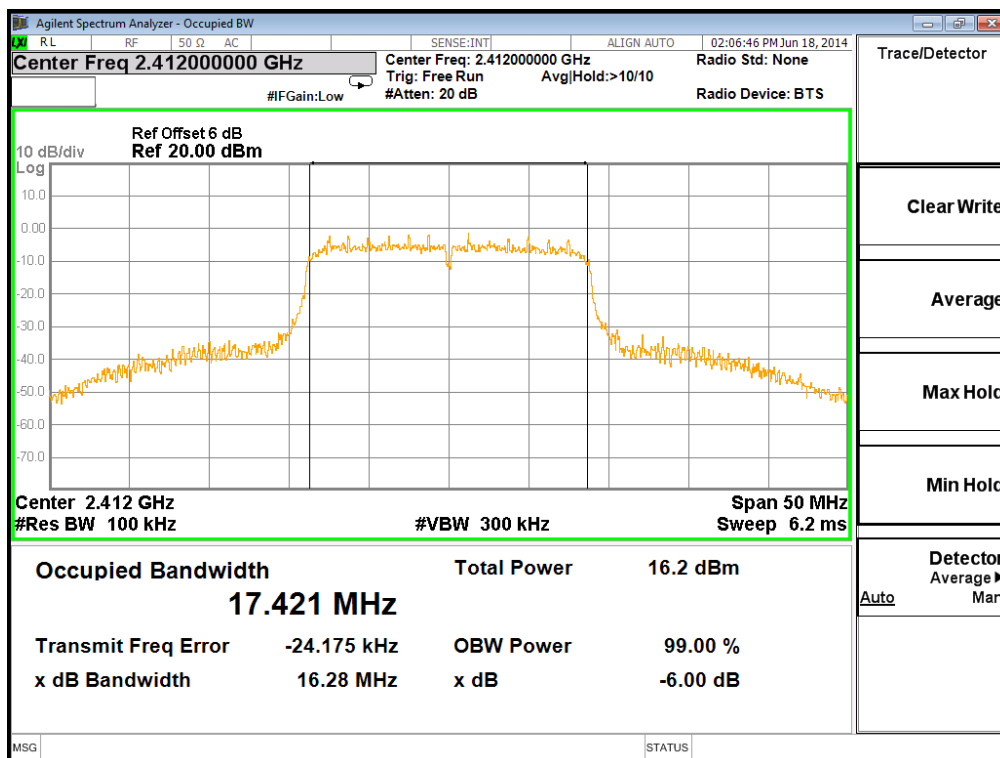




Channel 06 (2437MHz)

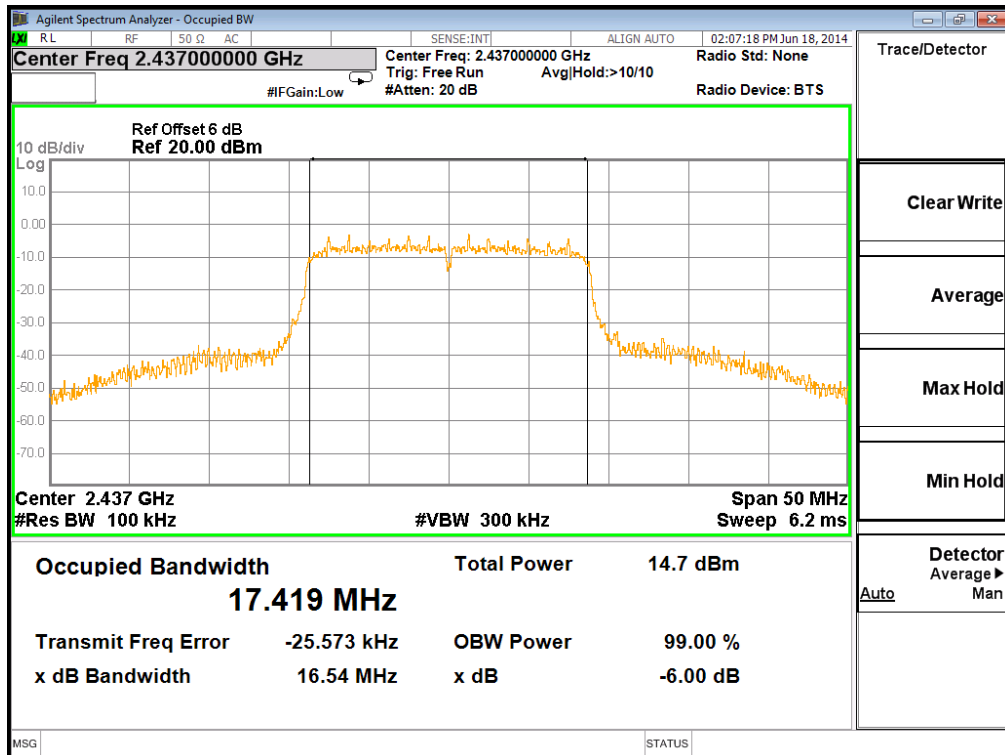

Channel 11 (2462MHz)

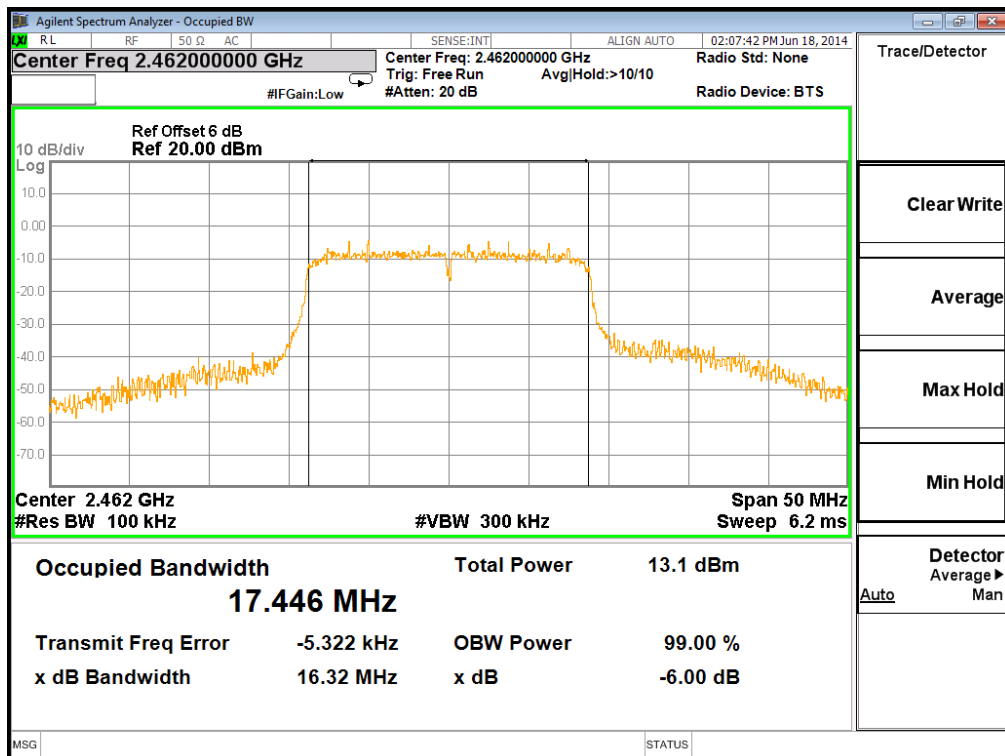




Test Item	Occupied Bandwidth
Test Mode	Transmit by 802.11n (20MHz) (Antenna 2)
Test Date	2014-06-20


Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (kHz)	Result
01	2412	16.55	500	Pass
06	2437	16.57	500	Pass
11	2462	16.58	500	Pass

Channel 01 (2412MHz)

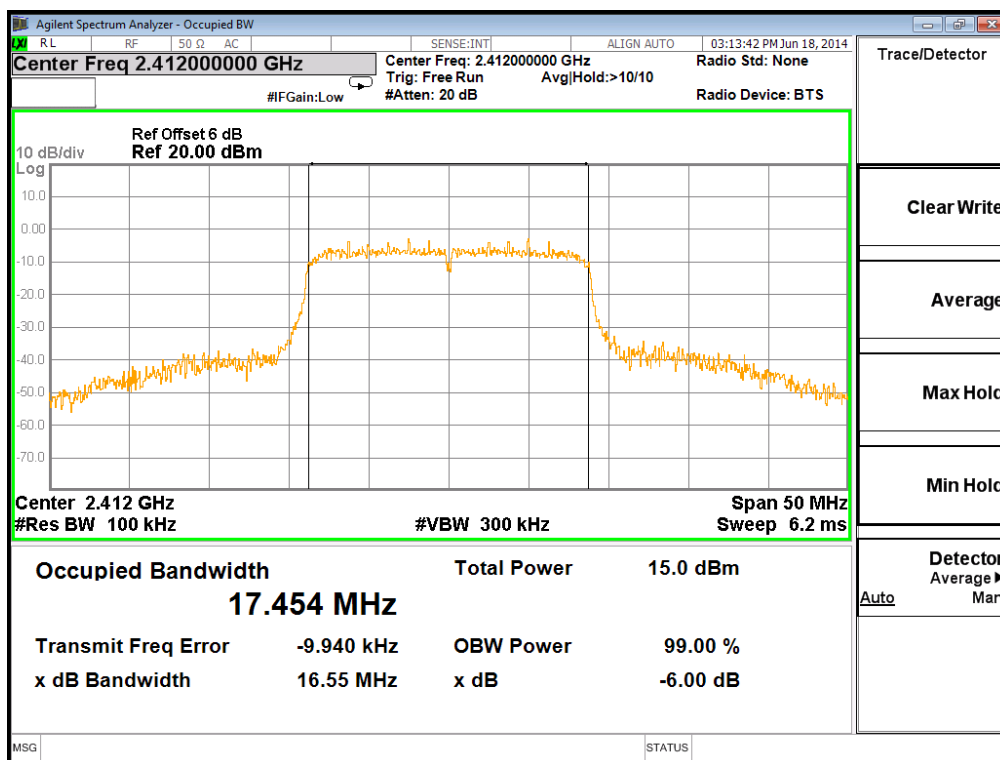




Channel 06 (2437MHz)

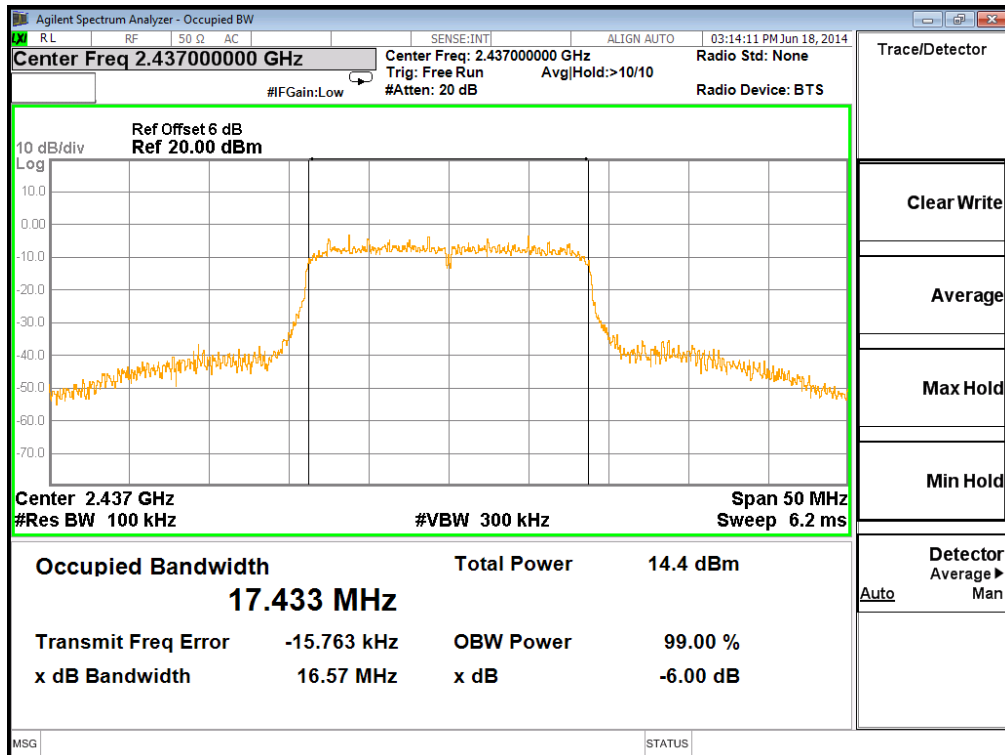

Channel 11 (2462MHz)

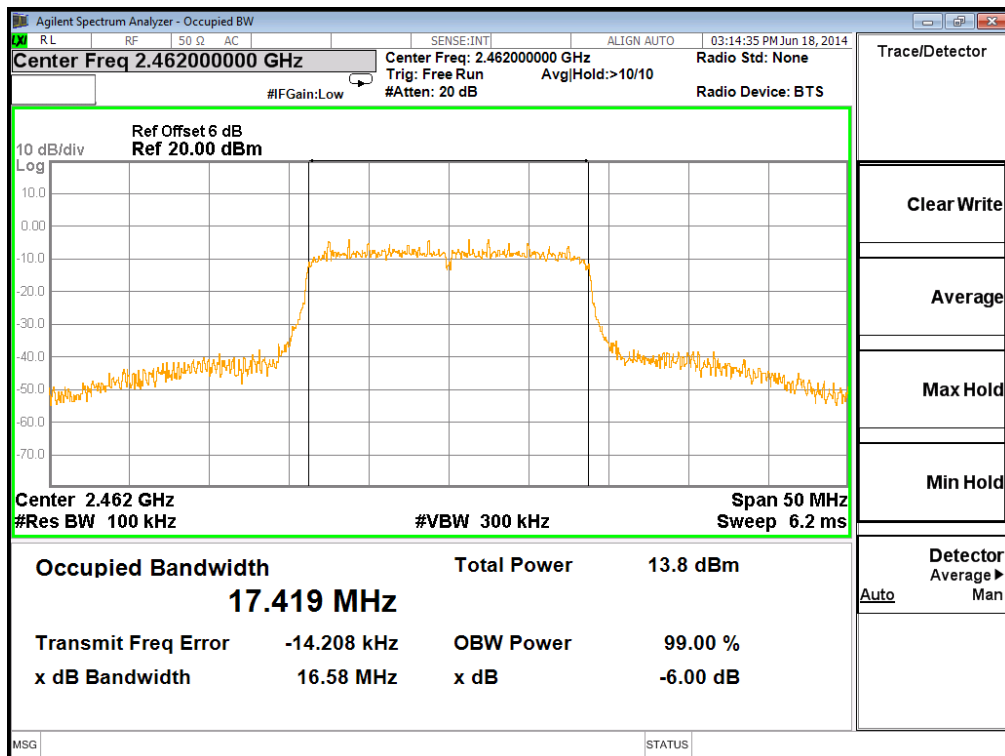




Test Item	Occupied Bandwidth
Test Mode	Transmit by 802.11n (40MHz) (Antenna 1)
Test Date	2014-06-20


Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (kHz)	Result
03	2422	35.35	500	Pass
06	2437	35.36	500	Pass
09	2452	35.49	500	Pass

Channel 03 (2422MHz)

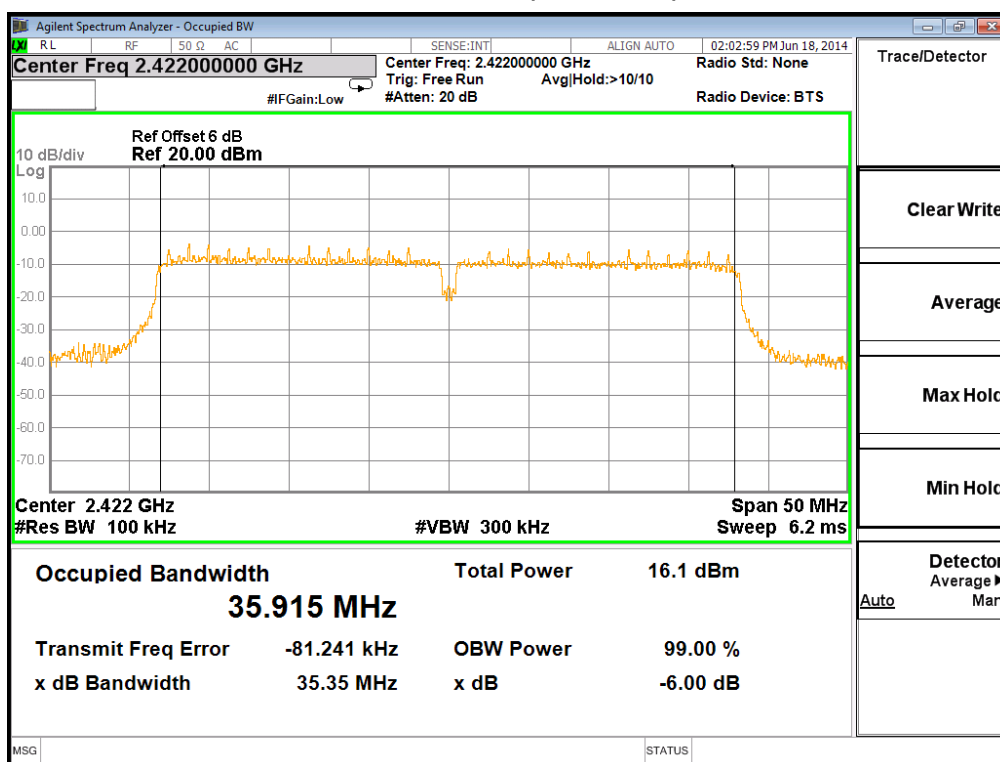




Channel 06 (2437MHz)

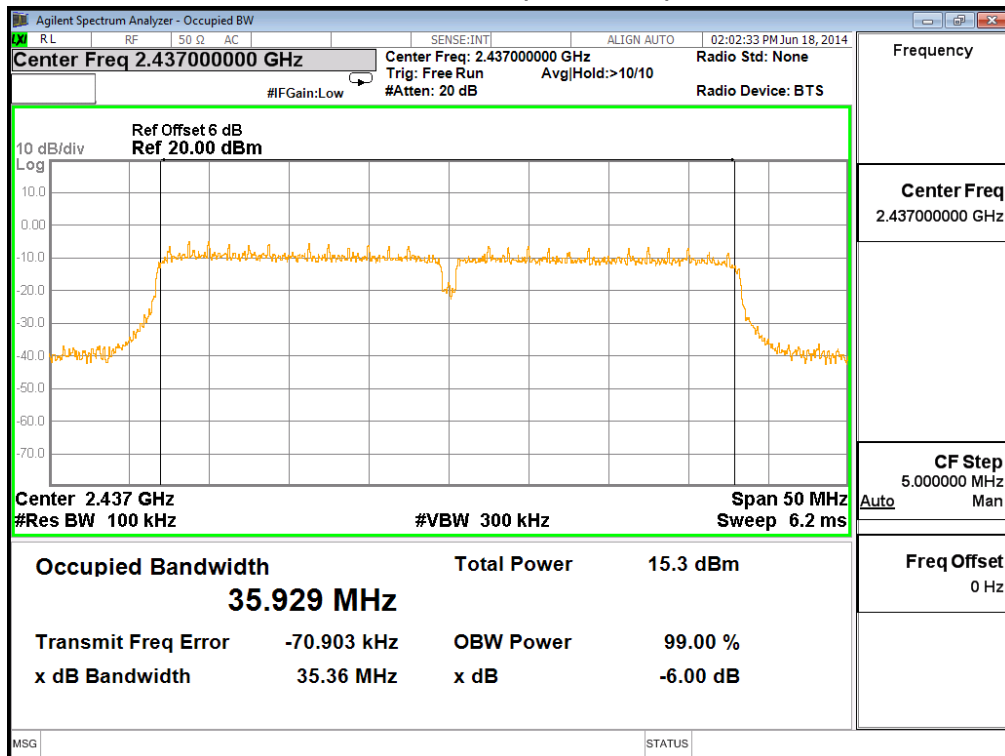

Channel 09 (2452MHz)

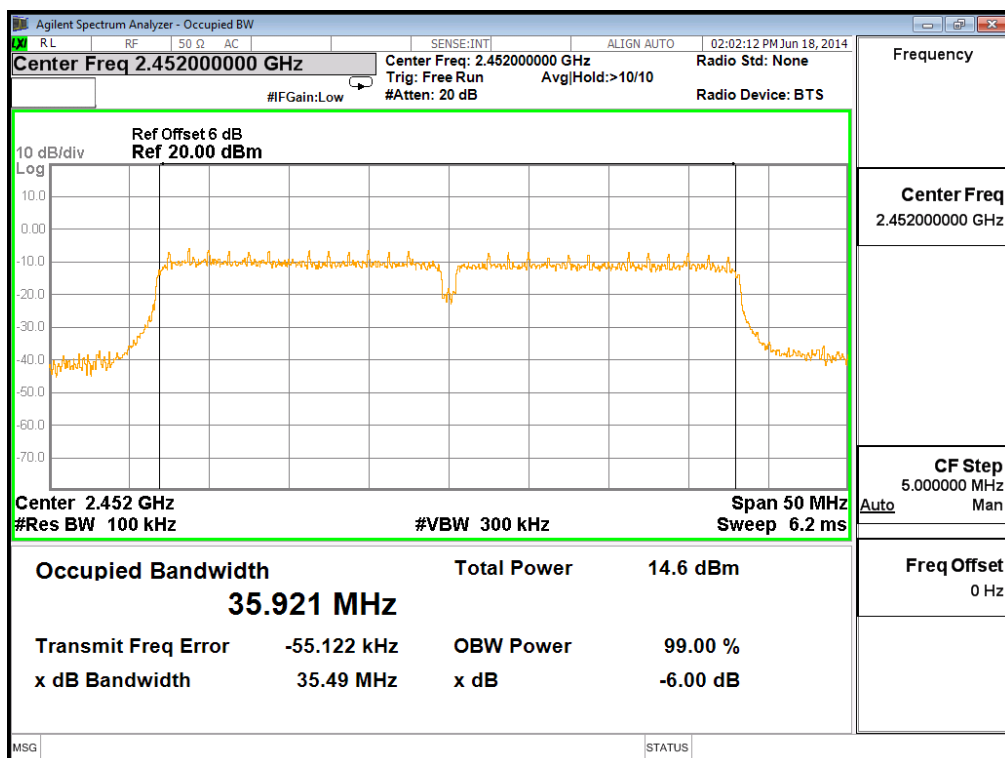




Test Item	Occupied Bandwidth
Test Mode	Transmit by 802.11n (40MHz) (Antenna 2)
Test Date	2014-06-20


Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (kHz)	Result
03	2422	36.40	500	Pass
06	2437	35.68	500	Pass
09	2452	35.36	500	Pass

Channel 03 (2422MHz)

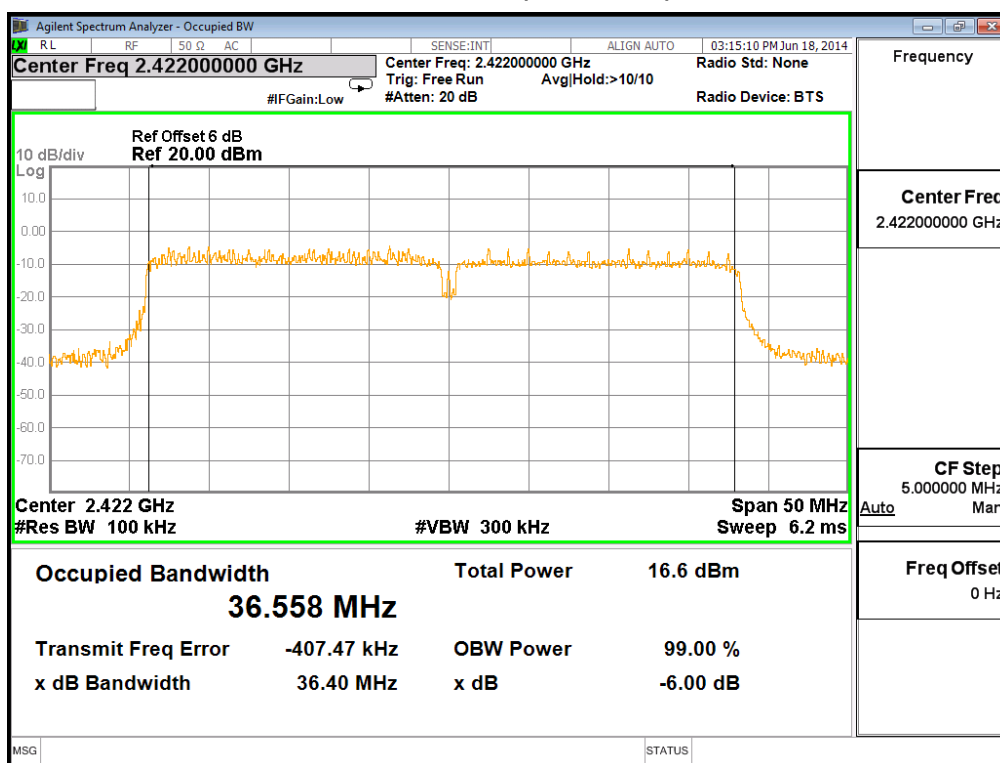




Channel 06 (2437MHz)

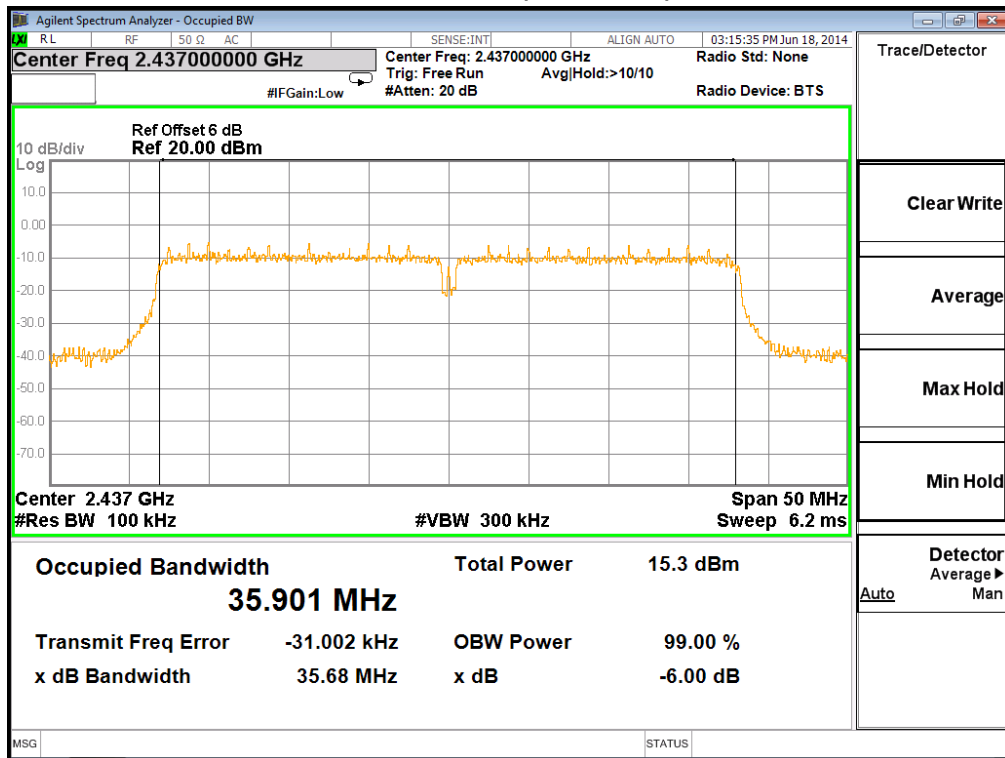

Channel 09 (2452MHz)

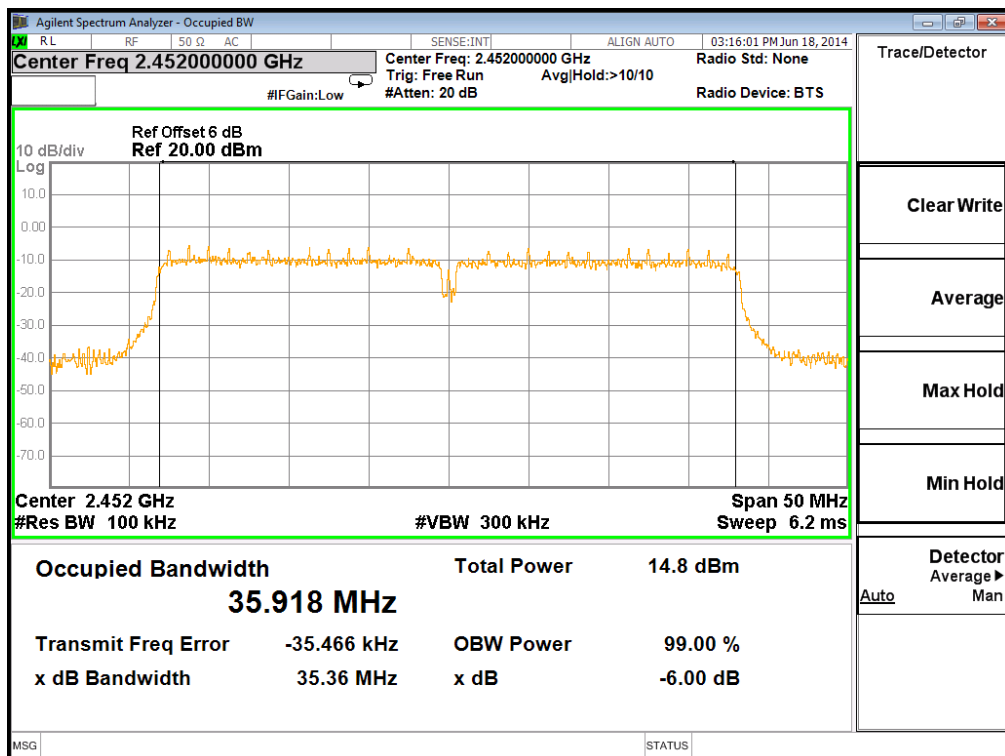



7. Maximum Peak Output Power

7.1 Test Limit

The maximum peak power shall be less 1Watt (30dBm).

The conducted output power limits specified in §15.247(b) are based on the use of transmit antennae with directional gains that do not exceed 6 dBi. If transmit antennae with an effective directional gain greater than 6 dBi are used, then the conducted output power from the EUT shall be reduced as specified in §15.247(b) and (c).

7.2 Test Procedure

The EUT was tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using KDB 558074 D01 DTS Meas Guidance v03r02 section 9.1.2 Peak power meter method.

7.3 Test Setup Layout



7.4 Measurement Equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
SERIES POWER METER	ANRITSU	ML2495A	1224005	2015/03/27	2016/03/26
POWER SENSOR	ANRITSU	MA2411B	1207295	2015/03/27	2016/03/26



7.5 Test Result and Data

Power output test was verified over all data rates of each mode shown as below, and then choose the maximum power output (blue marker) for final test of each channel.

MCS Index for 802.11n	Spatial Streams	Data Rate (Mbps)					
		802.11b	802.11g	20MHz Bandwidth		40MHz Bandwidth	
				800ns GI	400ns GI	800ns GI	400ns GI
0	1	1	6	6.5	7.2	13.5	15.0
1	1	2	9	13.0	14.4	27.0	30.0
2	1	5.5	12	19.5	21.7	40.5	45.0
3	1	11	18	26.0	28.9	54.0	60.0
4	1	--	24	39.0	43.3	81.0	90.0
5	1	--	36	52.0	57.8	108.0	120.0
6	1	--	48	58.5	65.0	121.5	135.0
7	1	--	54	65.0	72.2	135.0	150.0
8	2	--	--	13.0	14.4	27.0	30.0
9	2	--	--	26.0	28.9	54.0	60.0
10	2	--	--	39.0	43.3	81.0	90.0
11	2	--	--	52.0	57.8	108.0	120.0
12	2	--	--	78.0	86.7	162.0	180.0
13	2	--	--	104.0	115.6	216.0	240.0
14	2	--	--	117.0	130.0	243.0	270.0
15	2	--	--	130.0	144.0	270.0	300.0



Test Item	Maximum Peak Output Power
Test Mode	Transmit by 802.11b (Antenna 2)
Duty cycle	99%
Test Date	2015-4-16

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit (dBm)	Result
		Peak		
01	2412	18.36	30	Pass
06	2437	17.54	30	Pass
11	2462	16.57	30	Pass

Test Item	Maximum Peak Output Power
Test Mode	Transmit by 802.11g (Antenna 2)
Duty cycle	99%
Test Date	2015-4-16

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit (dBm)	Result
		Peak		
01	2412	16.14	30	Pass
06	2437	17.62	30	Pass
11	2462	18.37	30	Pass

Test Item	Maximum Peak Output Power
Test Mode	Transmit by 802.11n (20MHz)
Duty cycle	99%
Test Date	2015-4-16

Channel No.	Frequency (MHz)	(Antenna 1) Measurement (dBm)	(Antenna 2) Measurement (dBm)	(Antenna 1+ Antenna 2) Measurement (dBm)	Required Limit (dBm)	Result
		Peak	Peak	Peak		
01	2412	18.65	18.13	21.41	28.93	Pass
06	2437	17.31	17.26	20.30	28.93	Pass
11	2462	18.17	16.51	20.43	28.93	Pass

Note: Peak Power Output(Antenna 1+ Antenna 2) = $10 \cdot \log_{10}(10^{\text{Antenna 1}/10} + 10^{\text{Antenna 2}/10})$



Test Item	Maximum Peak Output Power
Test Mode	Transmit by 802.11n (40MHz)
Duty cycle	99%
Test Date	2015-4-16

Channel No.	Frequency (MHz)	(Antenna 1) Measurement (dBm)	(Antenna 2) Measurement (dBm)	(Antenna 1+ Antenna 2) Measurement (dBm)	Required Limit (dBm)	Result
		Peak	Peak	Peak		
03	2422	18.64	17.76	21.23	28.93	Pass
06	2437	18.12	17.34	20.76	28.93	Pass
09	2452	17.41	17.34	20.39	28.93	Pass

Note: Peak Power Output(Antenna 1+ Antenna 2) = $10 \cdot \log_{10}(10^{\text{Antenna 1}/10} + 10^{\text{Antenna 2}/10})$



8. Band Edges Measurement


8.1 Test Limit

Below -20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

8.2 Test Procedure

- The transmitter output was connected to the spectrum analyzer via a low lose cable.
- Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- The band edges was measured and recorded.

8.3 Test Setup Layout



8.4 Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
EMI Test Receiver	R&S	ESCI	100563	2014.02.10	2015.02.09
H64 Preamplifier	HP	8447F	3113A05582	2014.03.24	2015.03.23
Preamplifier	Agilent	8449B	3008A02342	2014.03.24	2015.03.23
Ultra Broadband Antenna	R&S	HL562	100362	2014.05.24	2015.05.23
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-619	2014.05.24	2015.05.23
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	9170-348	2013.11.04	2014.11.03
Spectrum Analyzer	R&S	FSP40	100324	2014.03.23	2015.03.24
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-002	2014.03.31	2015.03.30





8.5 Test Result and Data

Modulation Standard	Channel	Frequency (MHz)	maximum value in frequency (MHz)	maximum value(dBm)	Limit (dBm)
802.11b (Antenna 2)	01	2412	2401.0	-28.618	-9.736
	11	2462	2483.5	-37.681	-10.166
802.11g (Antenna 2)	01	2412	2400.0	-13.389	-11.039
	11	2462	2483.5	-32.714	-12.193
802.11n HT20 (Antenna 1)	01	2412	2399.0	-26.592	-11.608
	11	2462	2482.0	-27.777	-11.052
802.11n HT20 (Antenna 2)	01	2412	2395.0	-26.177	-11.320
	11	2462	2480.0	-28.234	-11.762
802.11n HT40 (Antenna 1)	03	2422	2398.0	-26.397	-11.374
	09	2452	2484.0	-26.397	-15.462
802.11n HT40 (Antenna 2)	03	2422	2399.0	-20.979	-13.572
	09	2452	2493.0	-23.305	-14.357





Transmit by 802.11b (Antenna 2)Channel 1

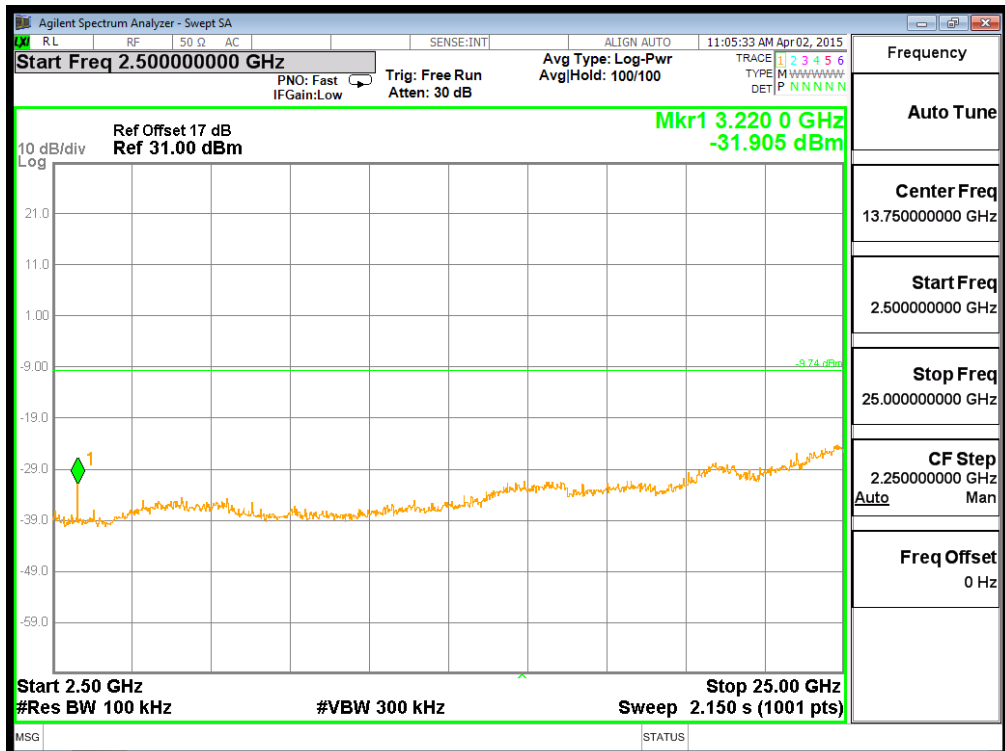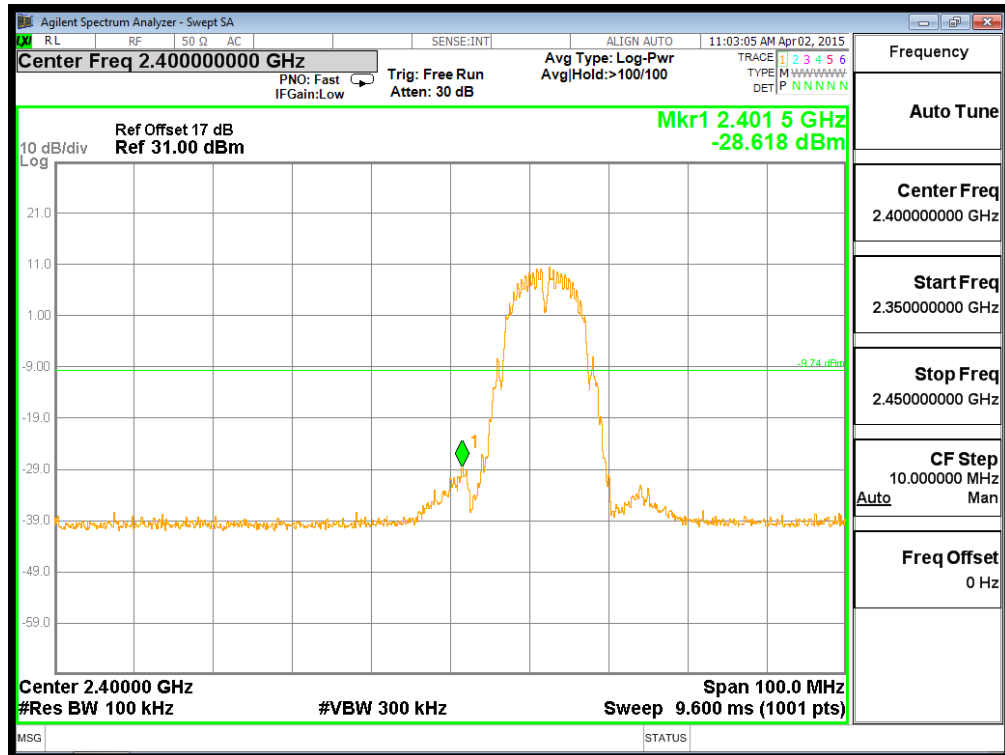





Transmit by 802.11b(Antenna 2) Channel 11

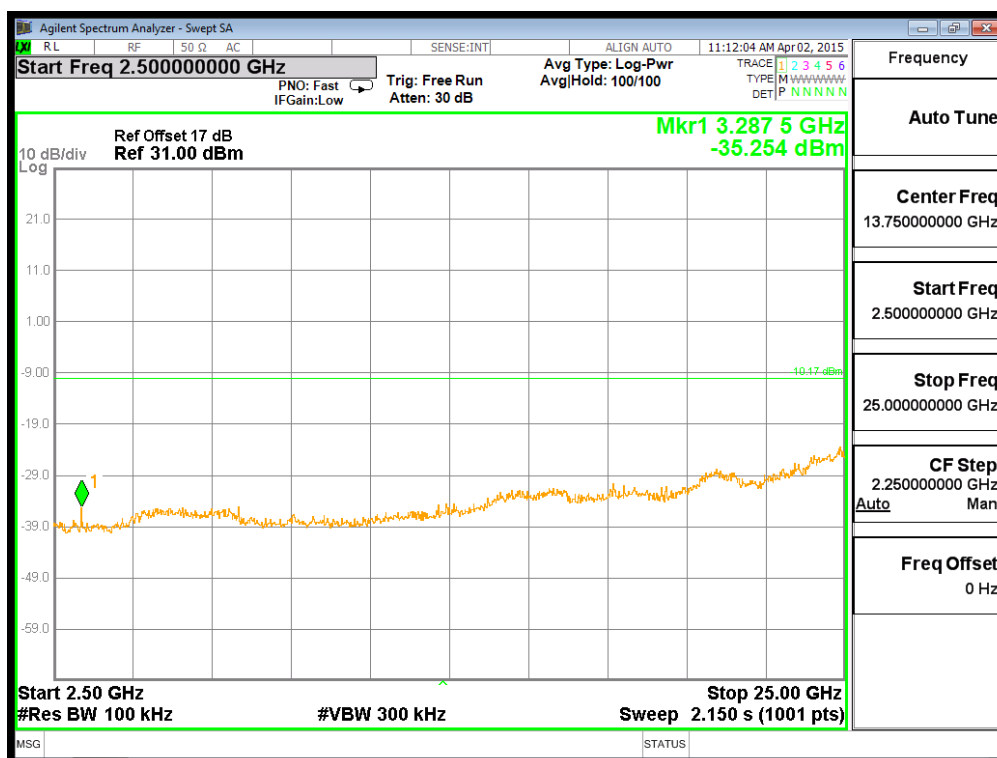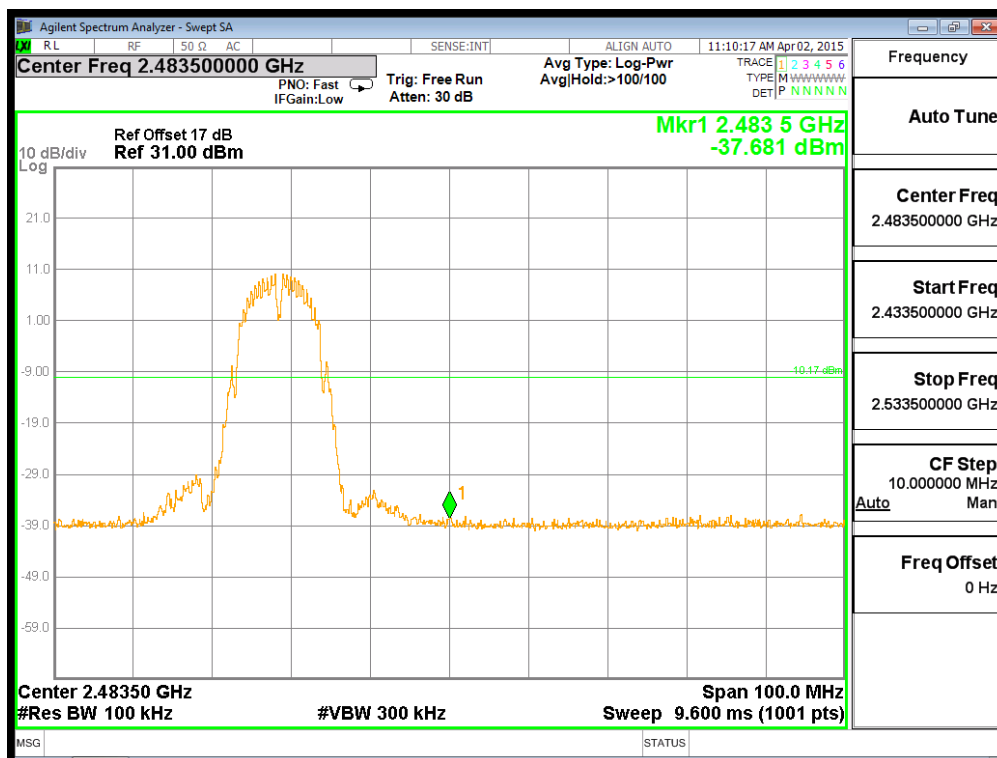





Transmit by 802.11g (Antenna 2)Channel 1

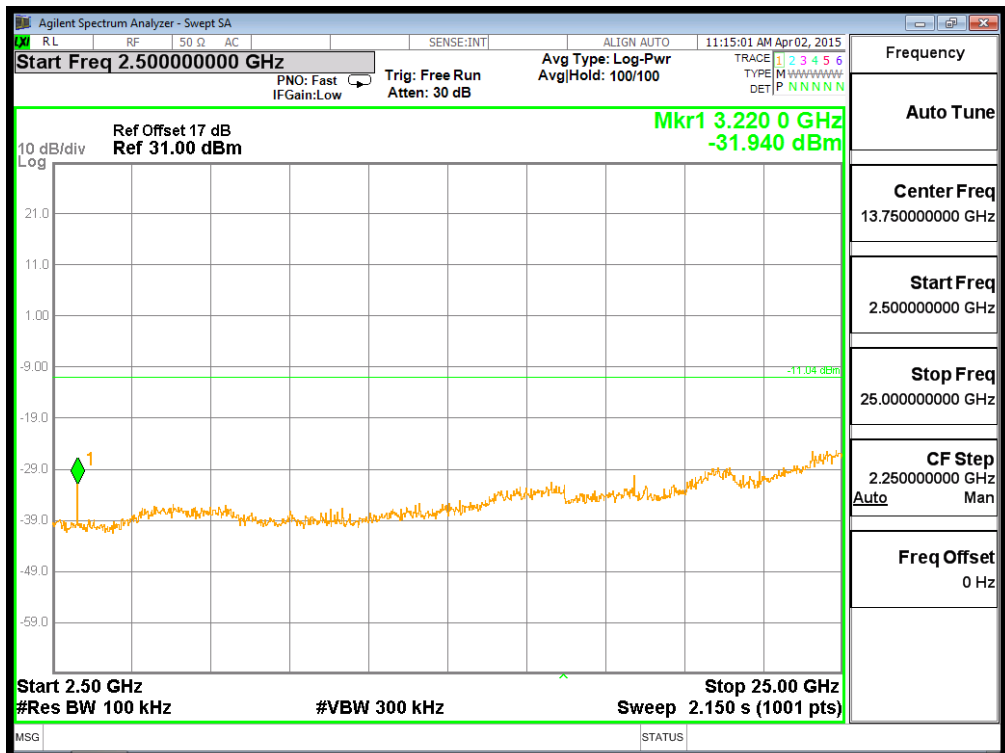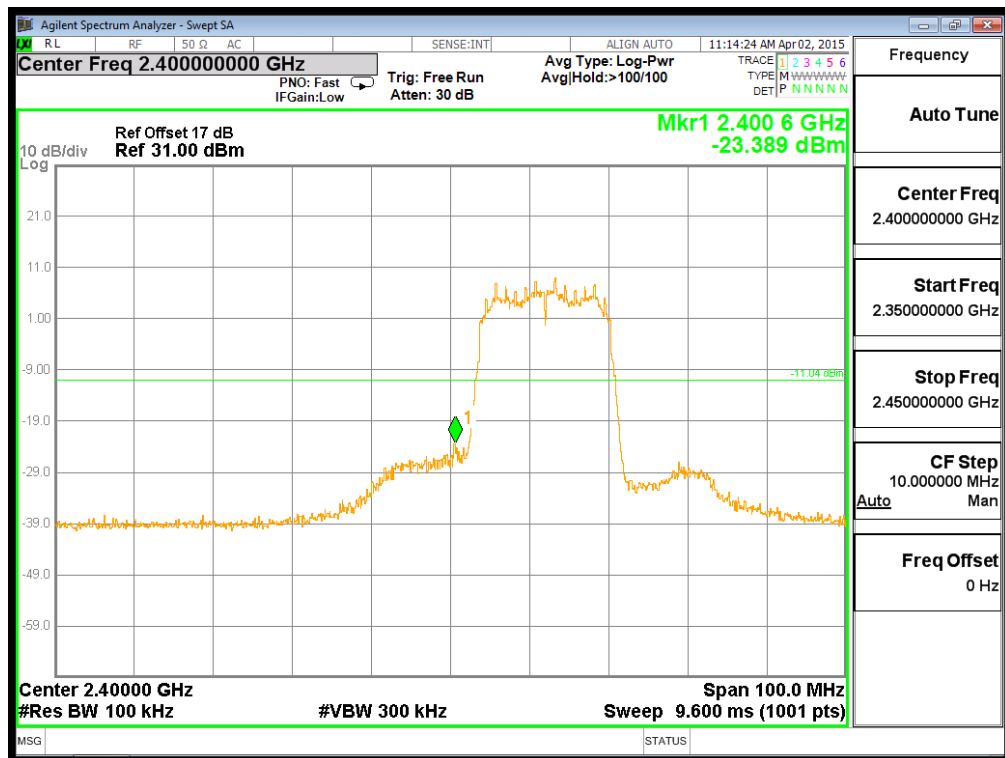





Transmit by 802.11g(Antenna 2) Channel 11

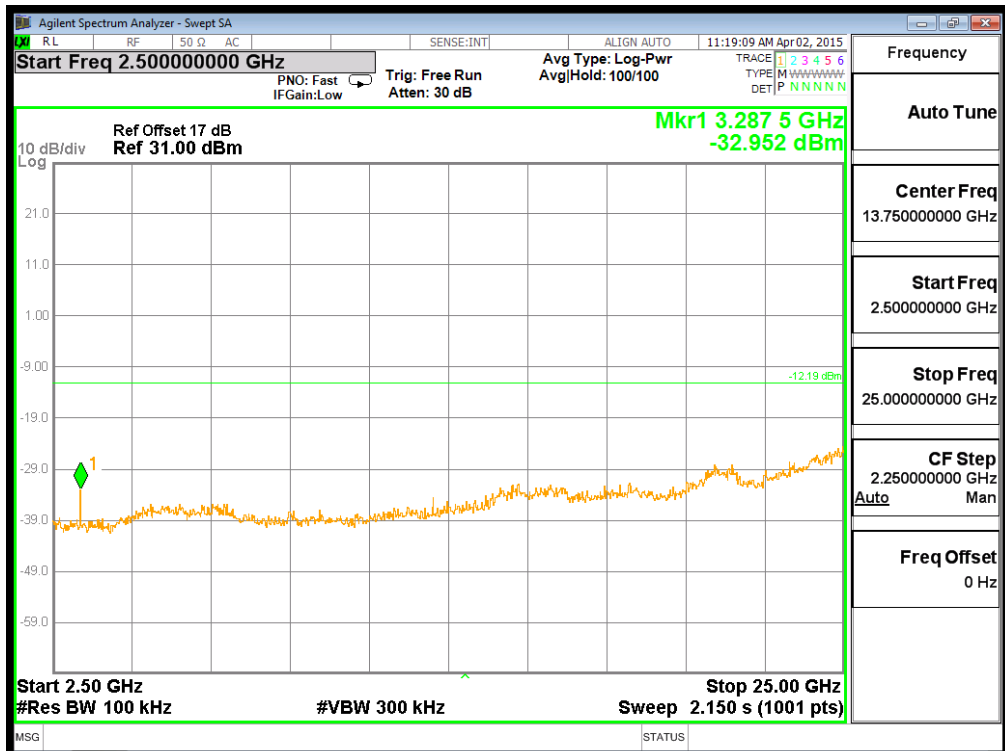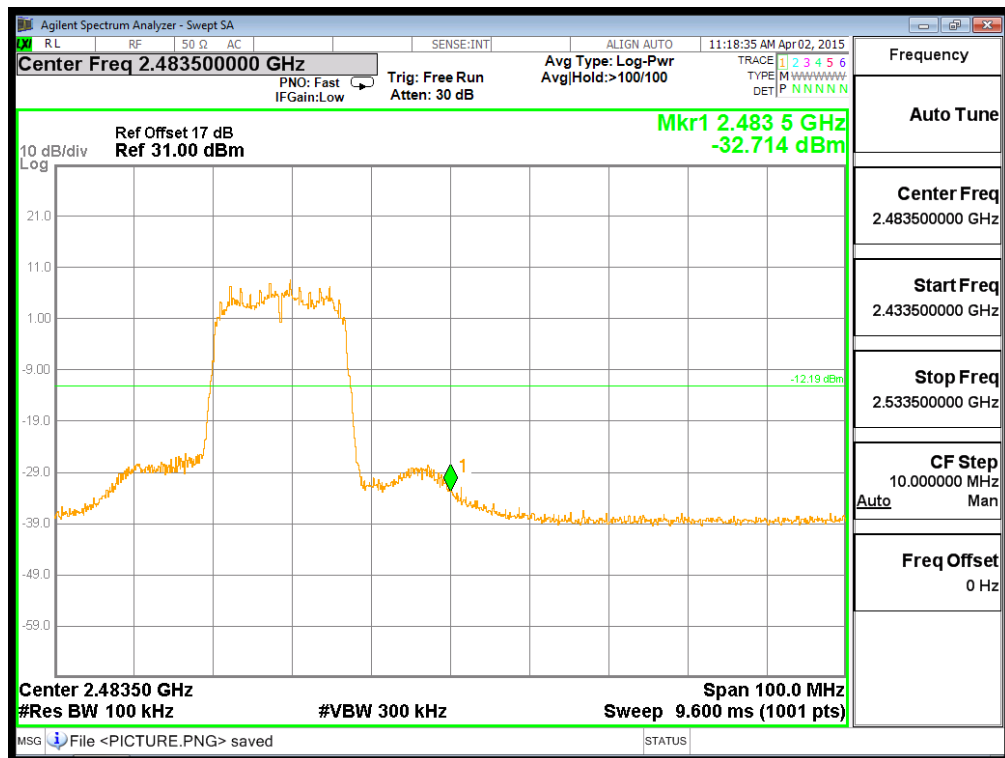





Transmit by 802.11n HT20 (Antenna 1)Channel 1

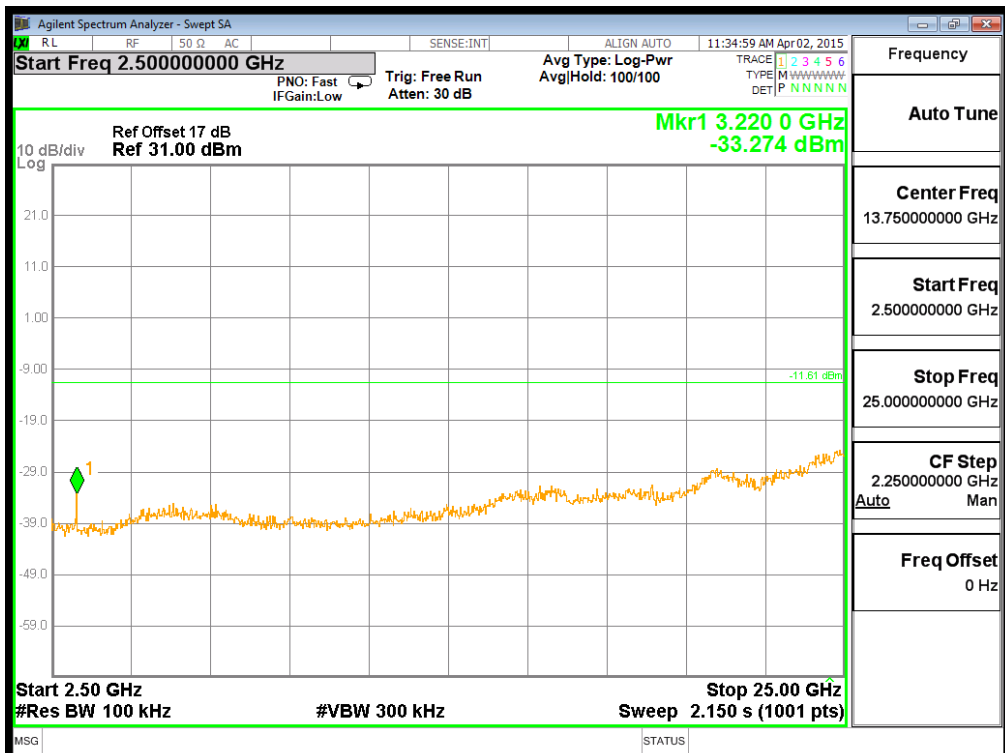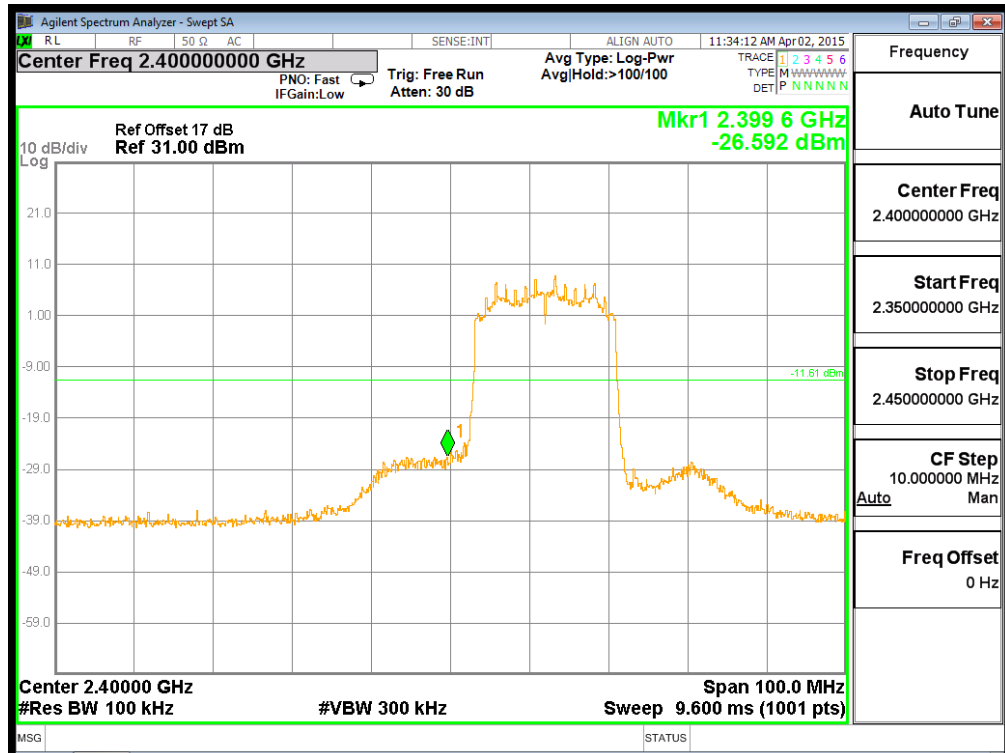





Transmit by 802.11n HT20 (Antenna 1)Channel 11

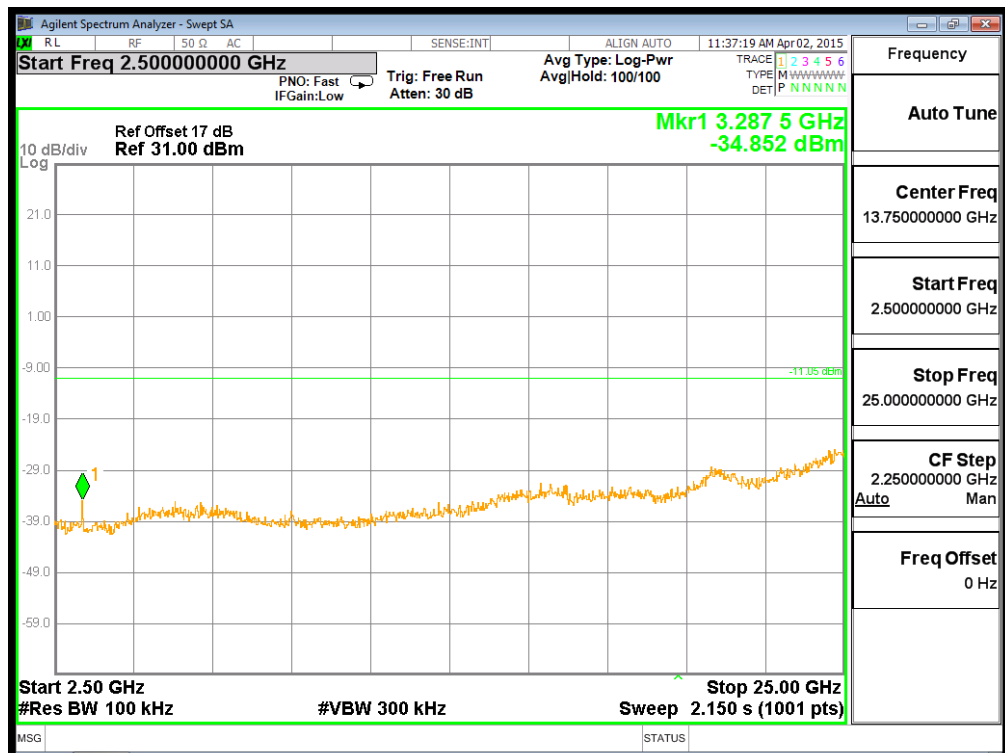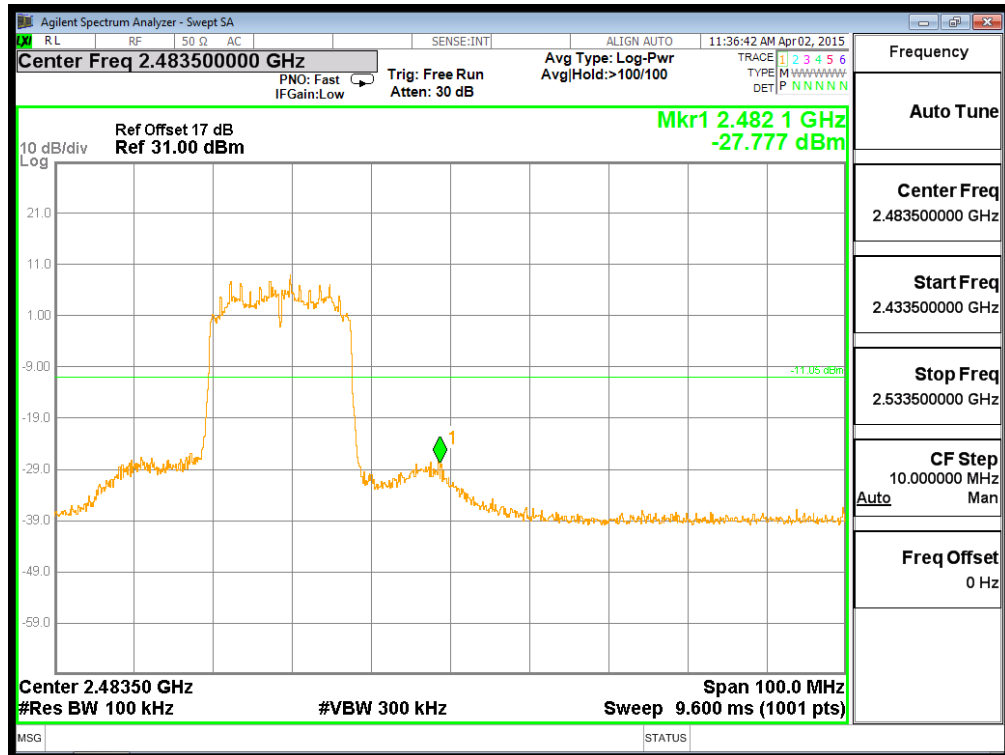





Transmit by 802.11n HT20 (Antenna 2)Channel 1

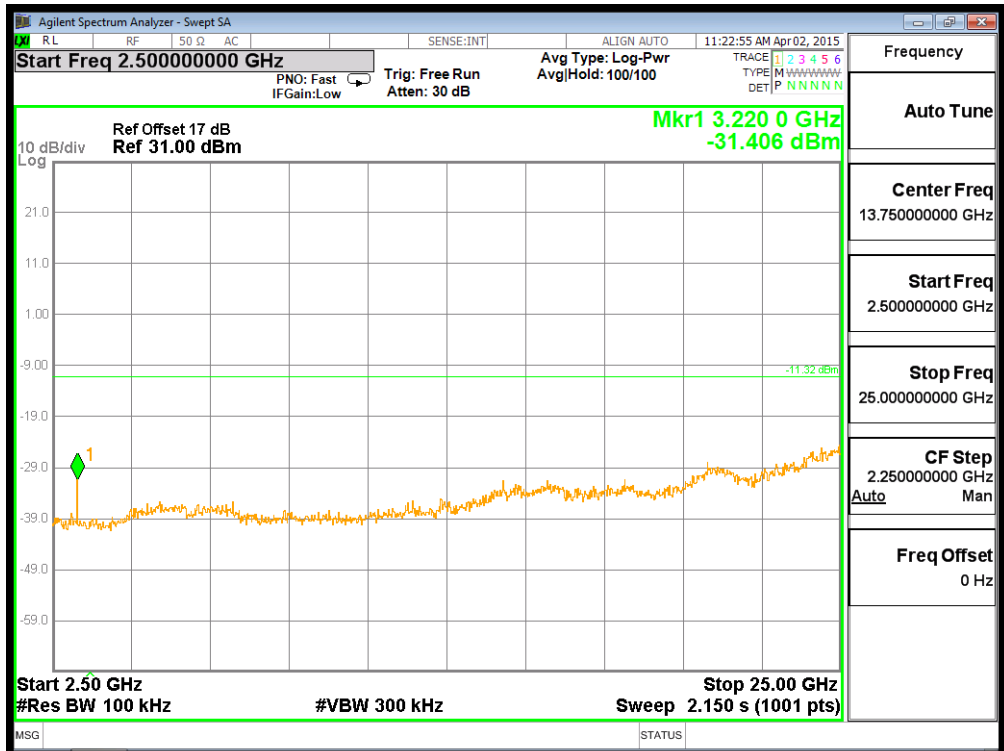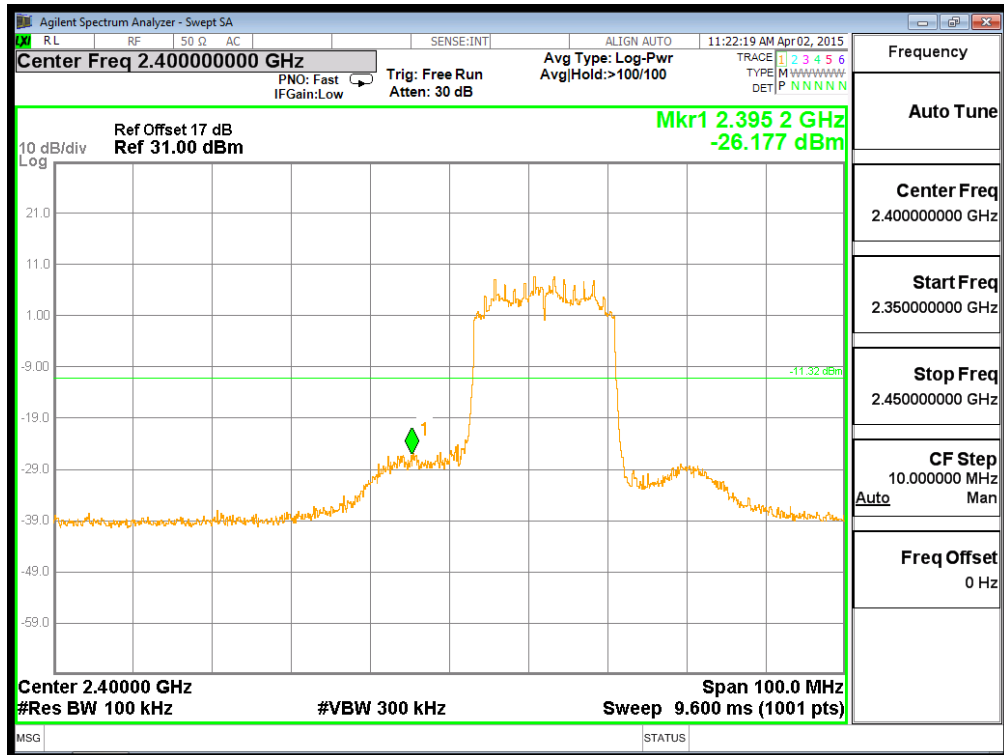





Transmit by 802.11n HT20 (Antenna 2)Channel 11

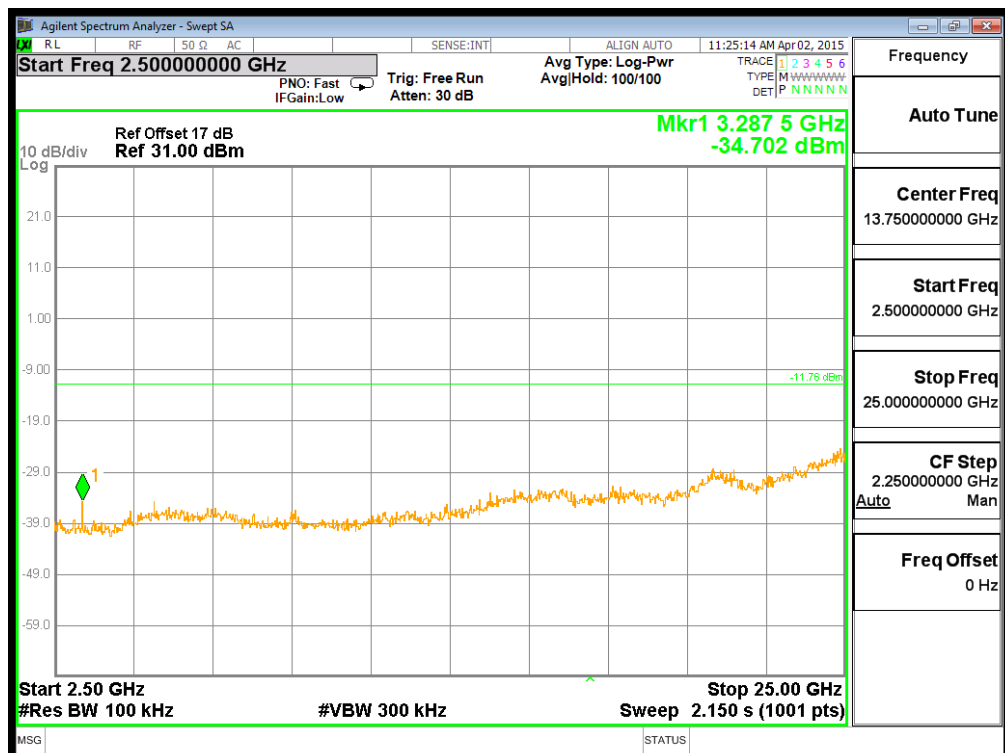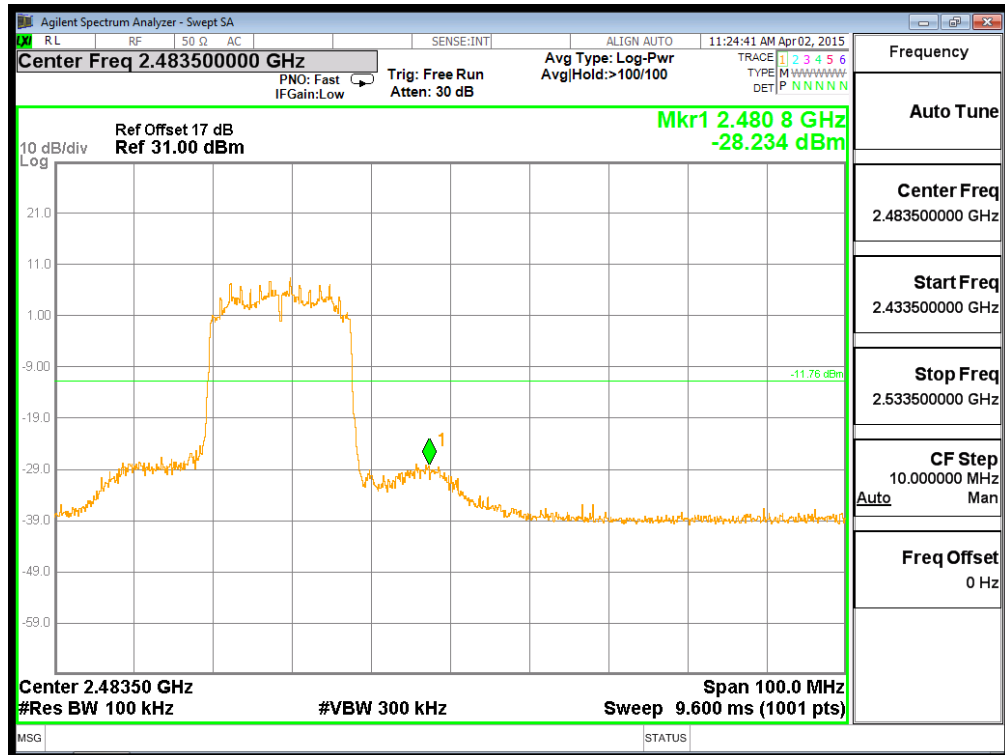





Transmit by 802.11n HT40(Antenna 1) Channel 3

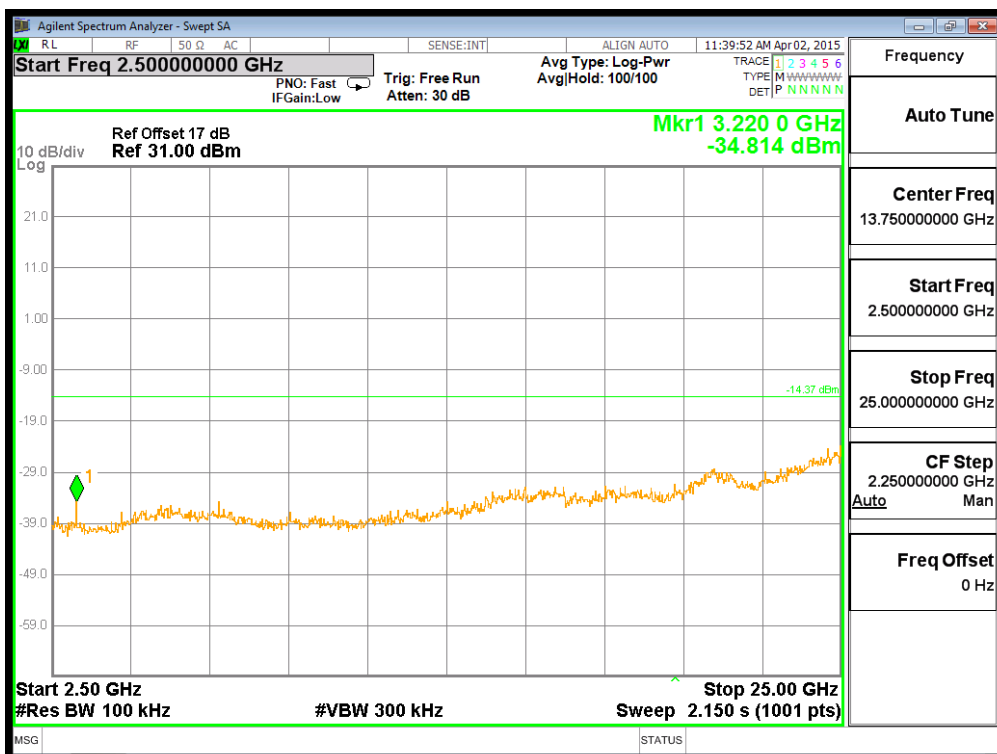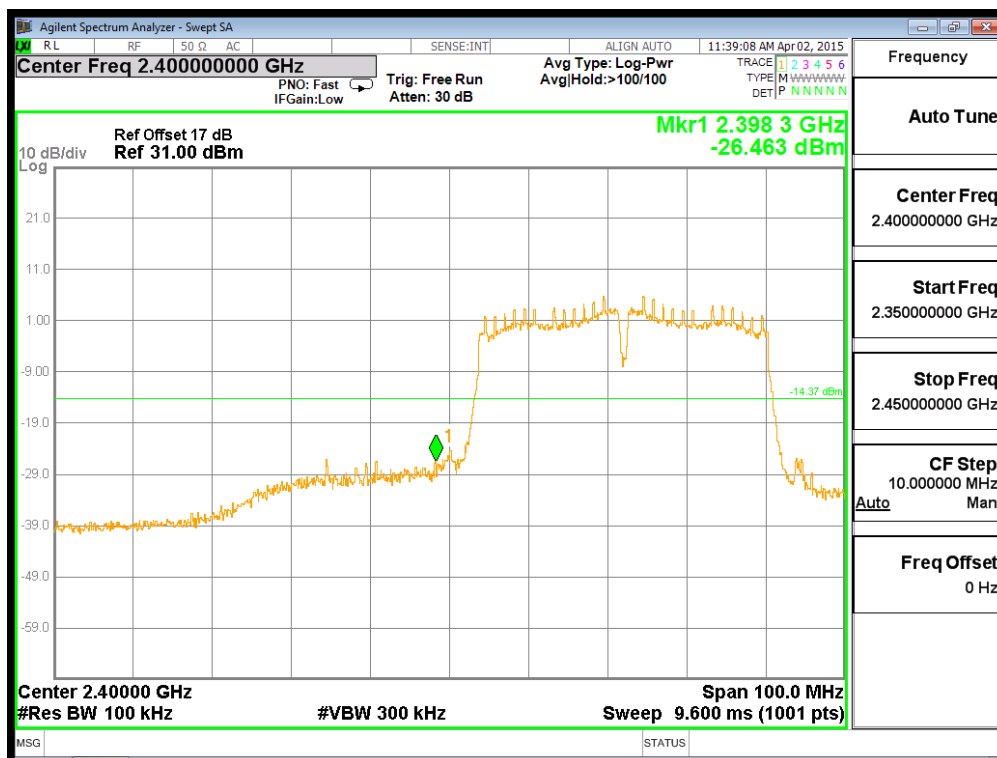





Transmit by 802.11n HT40 (Antenna 1)Channel 9

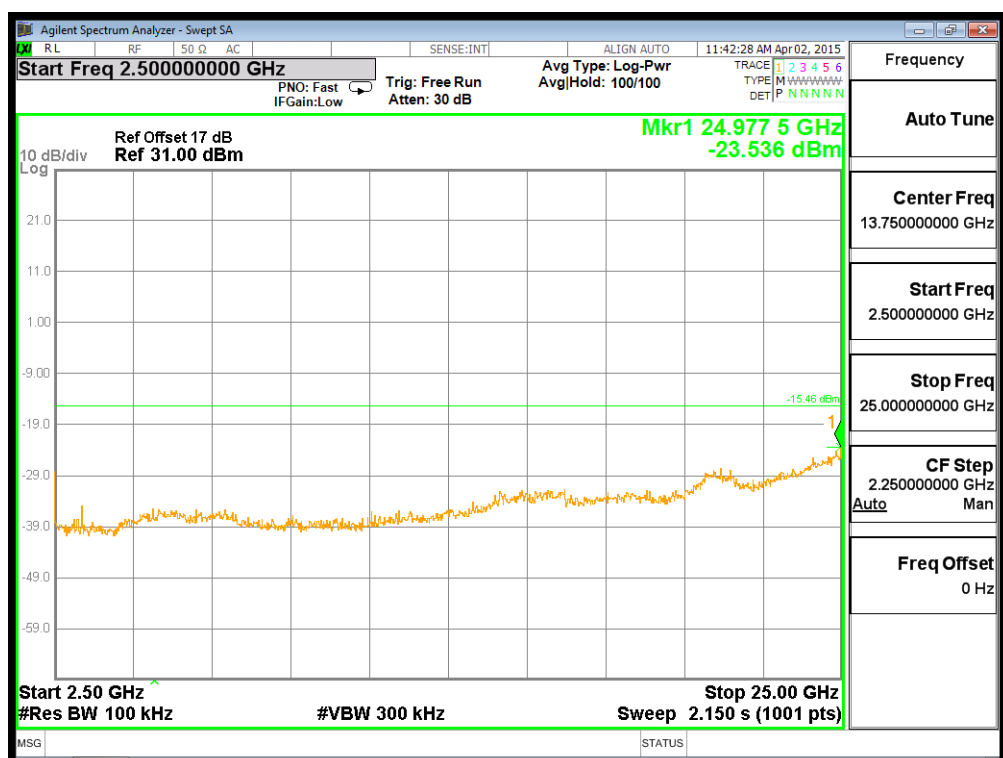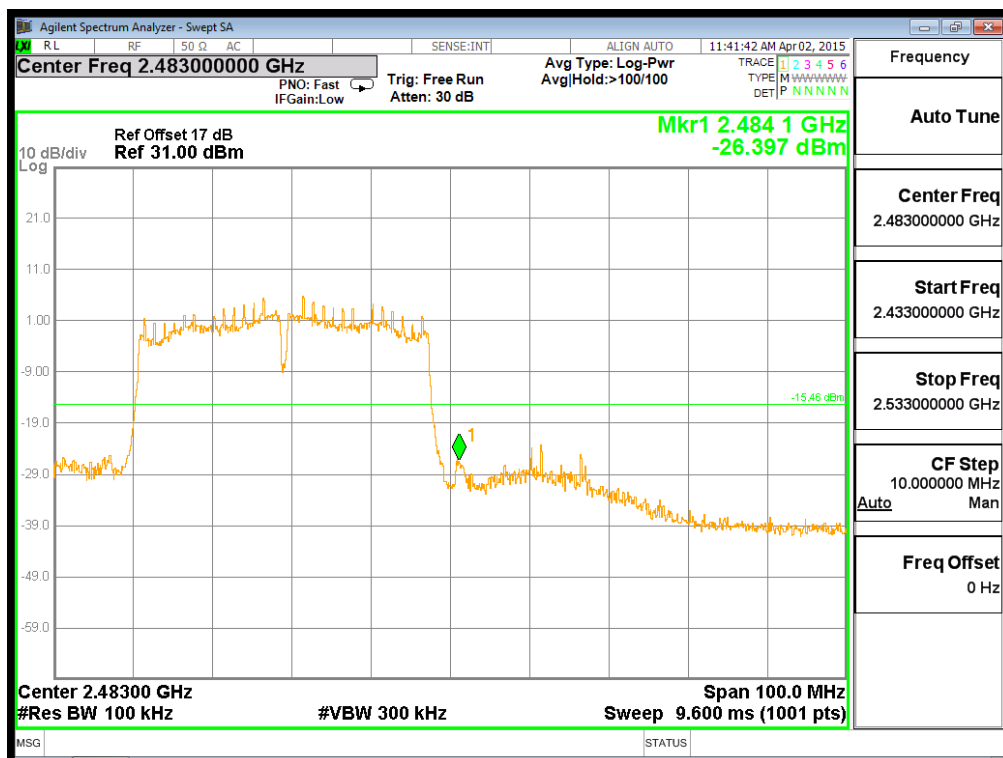





Transmit by 802.11n HT40(Antenna 2) Channel 3

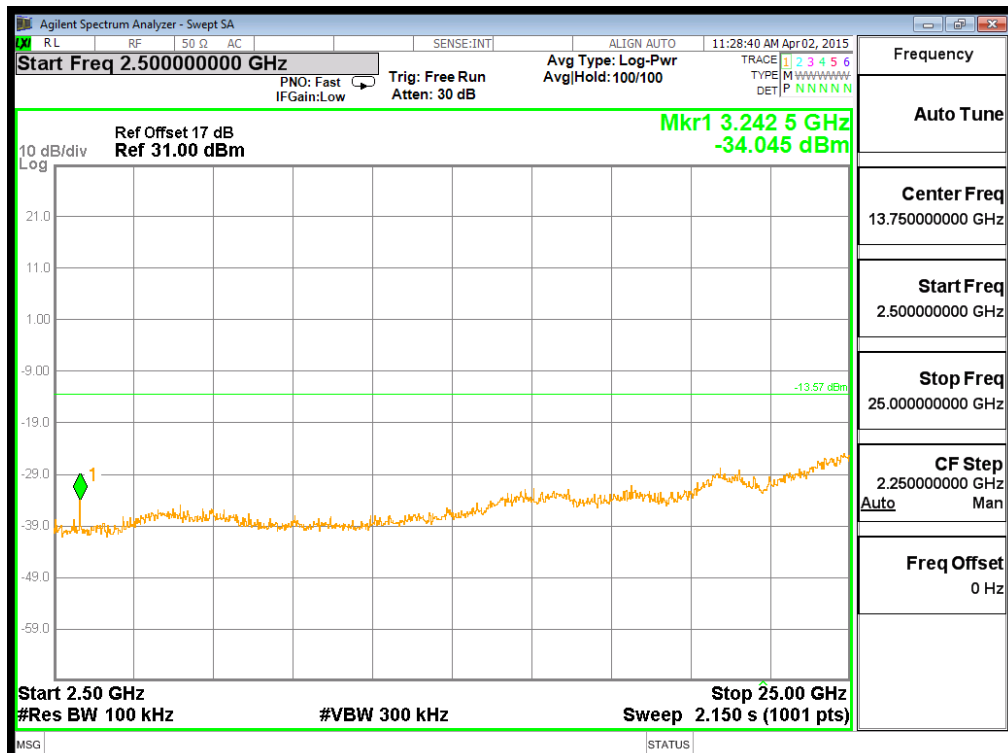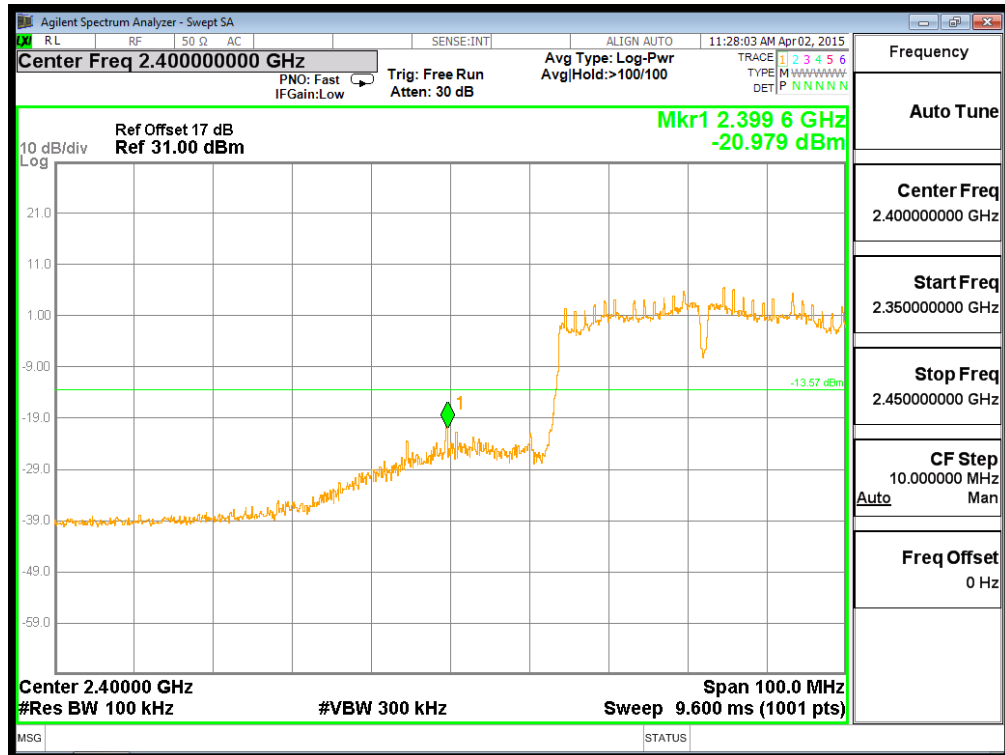



Transmit by 802.11n HT40 (Antenna 2)Channel 9

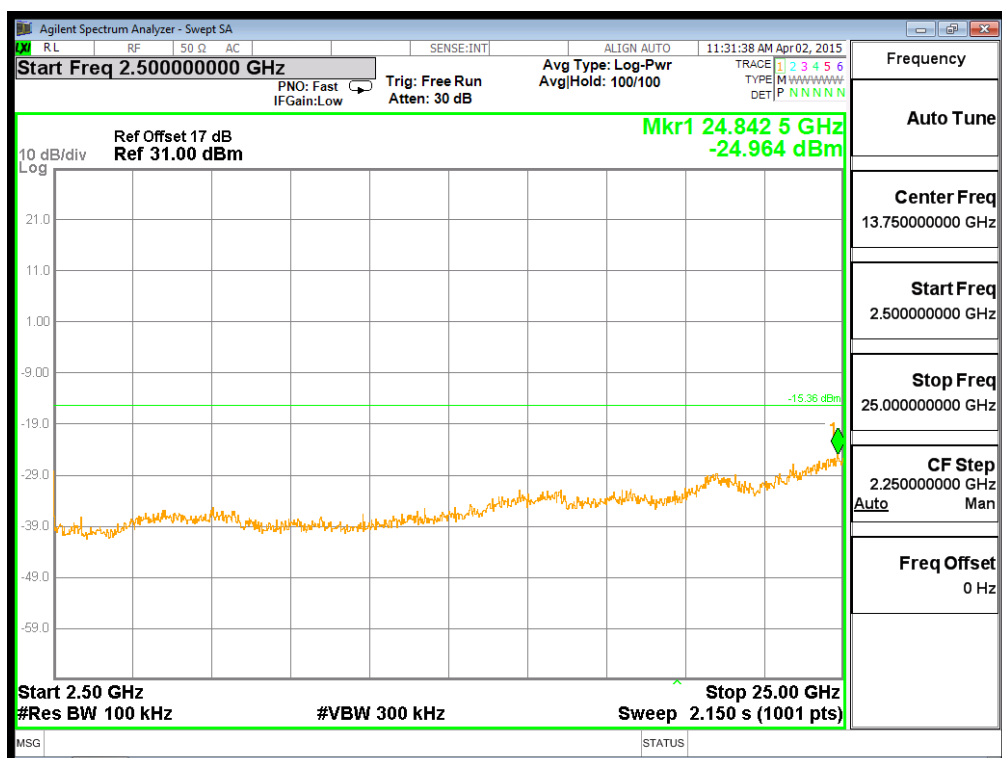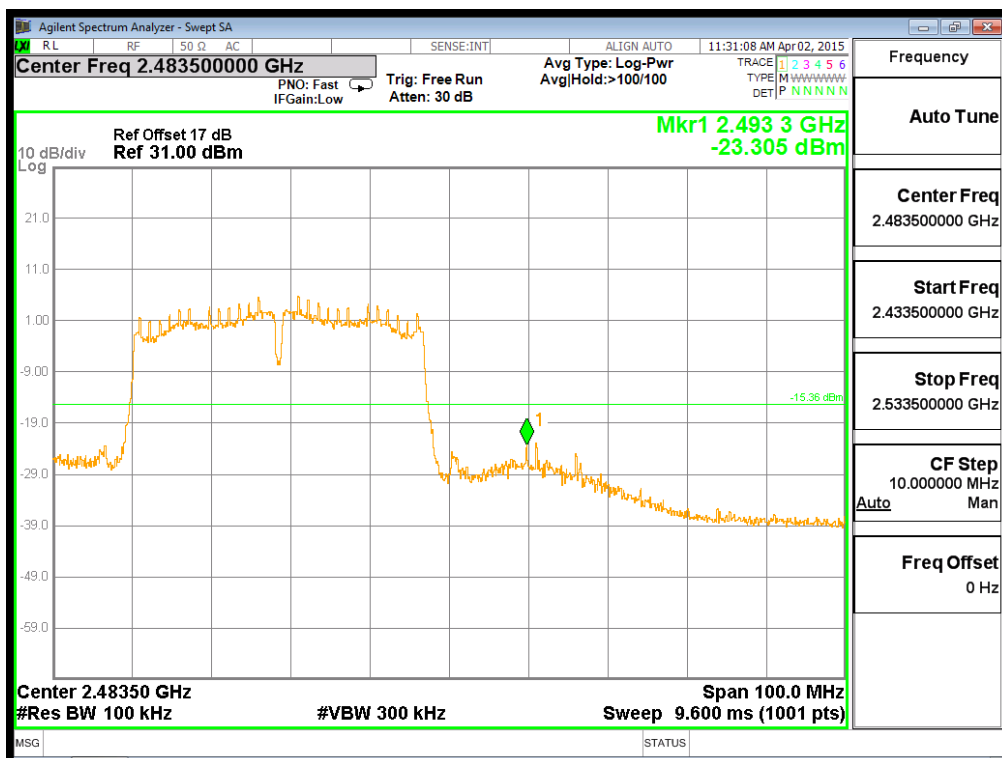



8.6 Restrict Band Emission Measurement Data

Test Date : 2015-5-20
Temperature : 24 °C
Humidity : 52 %
Atmospheric Pressure : 1023 hPa

Modulation Standard: IEEE 802.11b (Antenna 2)

Channel 1

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	2390	-4.11	38.72	34.61	74	-39.39	peak	H
2	2390	-4.11	26.73	22.62	54	-31.38	AVG	H
1	2390	-4.11	40.53	36.42	74	-37.58	peak	V
2	2390	-4.11	35.28	31.17	54	-22.83	AVG	V

Channel 11

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	2483.5	-3.52	42.16	38.64	74	-35.36	peak	H
2	2483.5	-3.52	33.82	30.3	54	-23.7	AVG	H
1	2483.5	-3.52	45.41	41.89	74	-32.11	peak	V
2	2483.5	-3.52	38.47	34.95	54	-19.05	AVG	V

Notes:1. Result = Reading + Factor

2. Factor = Antenna Factor + Cable Loss – Amplifier

For example: 2390MHz(-4.11=29.1+6.58-39.79)

3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.

4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.



Modulation Standard: IEEE 802.11g (Antenna 2)

Channel 1

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	2390	-4.11	46.33	42.22	74	-31.78	peak	H
2	2390	-4.11	37.65	33.54	54	-20.46	AVG	H
1	2390	-4.11	49.64	45.53	74	-28.47	peak	V
2	2390	-4.11	36.78	32.67	54	-21.33	AVG	V

Channel 11

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	2483.5	-3.52	47.67	44.15	74	-29.85	peak	H
2	2483.5	-3.52	36.74	33.22	54	-20.78	AVG	H
1	2483.5	-3.52	58.55	55.03	74	-18.97	peak	V
2	2483.5	-3.52	46.21	42.69	54	-11.31	AVG	V

Notes:1. Result = Reading + Factor

2. Factor = Antenna Factor + Cable Loss – Amplifier

For example: 2390MHz(-4.11=29.1+6.58-39.79)

3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.

4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.



Modulation Standard: IEEE 802.11n HT20 (Antenna 1)

Channel 1

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	2390	-4.11	56.53	52.42	74	-21.58	peak	H
2	2390	-4.11	45.32	41.21	54	-12.79	AVG	H
1	2390	-4.11	53.45	49.34	74	-24.66	peak	V
2	2390	-4.11	47.25	43.14	54	-10.86	AVG	V

Channel 11

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	2483.5	-3.52	44.36	40.84	74	-33.16	peak	H
2	2483.5	-3.52	32.74	29.22	54	-24.78	AVG	H
1	2483.5	-3.52	48.37	44.85	74	-29.15	peak	V
2	2483.5	-3.52	36.92	33.4	54	-20.6	AVG	V

Notes:1. Result = Reading + Factor

2. Factor = Antenna Factor + Cable Loss – Amplifier

For example: 2390MHz(-4.11=29.1+6.58-39.79)

3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.

4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.



Modulation Standard: IEEE 802.11n HT20 (Antenna 2)

Channel 1

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	2390	-4.11	55.32	51.21	74	-22.79	peak	H
2	2390	-4.11	48.64	44.53	54	-9.47	AVG	H
1	2390	-4.11	58.63	54.52	74	-19.48	peak	V
2	2390	-4.11	49.43	45.32	54	-8.68	AVG	V

Channel 11

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	2483.5	-3.52	46.45	42.93	74	-31.07	peak	H
2	2483.5	-3.52	34.68	31.16	54	-22.84	AVG	H
1	2483.5	-3.52	48.46	44.94	74	-29.06	peak	V
2	2483.5	-3.52	35.63	32.11	54	-21.89	AVG	V

Notes:1. Result = Reading + Factor

2. Factor = Antenna Factor + Cable Loss – Amplifier

For example: 2390MHz(-4.11=29.1+6.58-39.79)

3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.

4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.



Modulation Standard: IEEE 802.11n HT40 (Antenna 1)

Channel 3

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	2390	-4.11	45.34	41.23	74	-32.77	peak	H
2	2390	-4.11	36.73	32.62	54	-21.38	AVG	H
1	2390	-4.11	48.63	44.52	74	-29.48	peak	V
2	2390	-4.11	37.86	33.75	54	-20.25	AVG	V

Channel 9

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	2483.5	-3.52	46.23	42.71	74	-31.29	peak	H
2	2483.5	-3.52	32.52	29	54	-25.00	AVG	H
1	2483.5	-3.52	48.64	45.12	74	-28.88	peak	V
2	2483.5	-3.52	36.73	33.21	54	-20.79	AVG	V

Notes:1. Result = Reading + Factor

2. Factor = Antenna Factor + Cable Loss – Amplifier

For example: 2390MHz(-4.11=29.1+6.58-39.79)

3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.

4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.



Modulation Standard: IEEE 802.11n HT40 (Antenna 2)

Channel 3

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	2390	-4.11	46.53	42.42	74	-31.58	peak	H
2	2390	-4.11	37.42	33.31	54	-20.69	AVG	H
1	2390	-4.11	49.57	45.46	74	-28.54	peak	V
2	2390	-4.11	38.63	34.52	54	-19.48	AVG	V

Channel 9

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	2483.5	-3.52	46.87	43.35	74	-30.65	peak	H
2	2483.5	-3.52	35.42	31.9	54	-22.1	AVG	H
1	2483.5	-3.52	48.53	45.01	74	-28.99	peak	V
2	2483.5	-3.52	36.47	32.95	54	-21.05	AVG	V

Notes:1. Result = Reading + Factor

2. Factor = Antenna Factor + Cable Loss – Amplifier

For example: 2390MHz(-4.11=29.1+6.58-39.79)

3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.

4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.



9. Power Spectral Density

9.1 Test Limit


The Maximum of Power Spectral Density Measurement is 8dBm.

9.2 Test Procedure

The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

9.3 Test Setup Layout



9.4 Measurement Equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	N9010A	Agilent	MY51350515	2013.09.29	2014.09.29




9.5 Test Result and Data

Test Item	Power Spectral Density
Test Mode	Transmit by 802.11b (Antenna 2)
Test Date	2015-4-23


Channel	Frequency (MHz)	Measurement PPSD (dBm/3kHz)	Limit (dBm)	Result
01	2412	-11.169	8	Pass
06	2437	-9.621	8	Pass
11	2462	-10.959	8	Pass

Channel 01 (2412MHz)

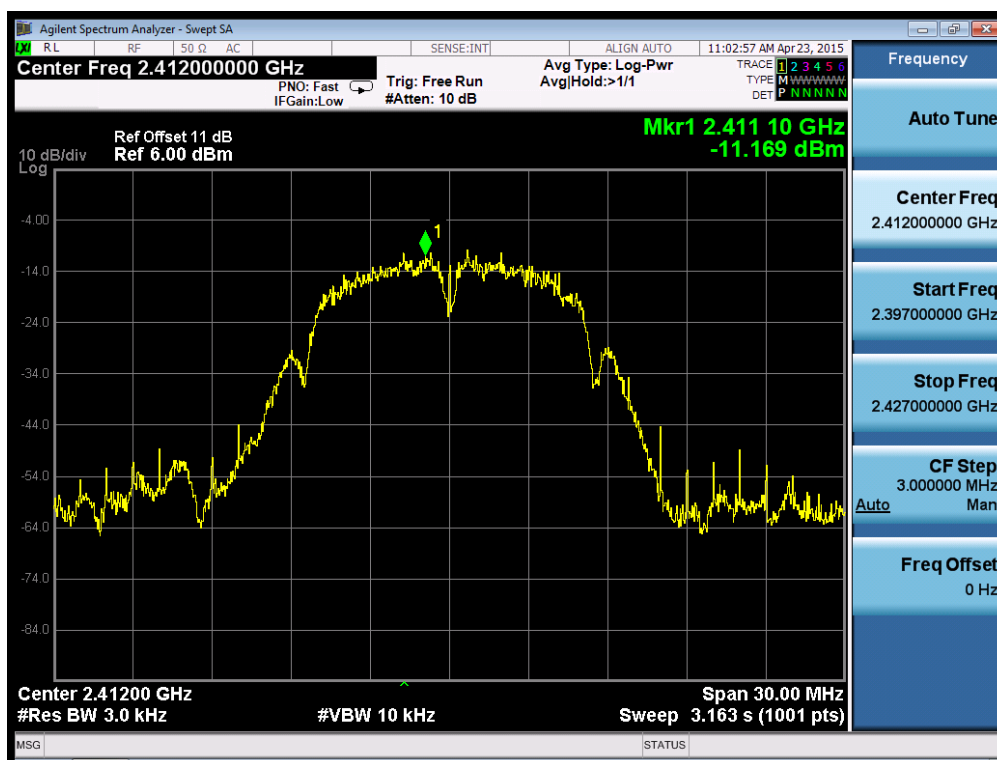




Channel 06 (2437MHz)

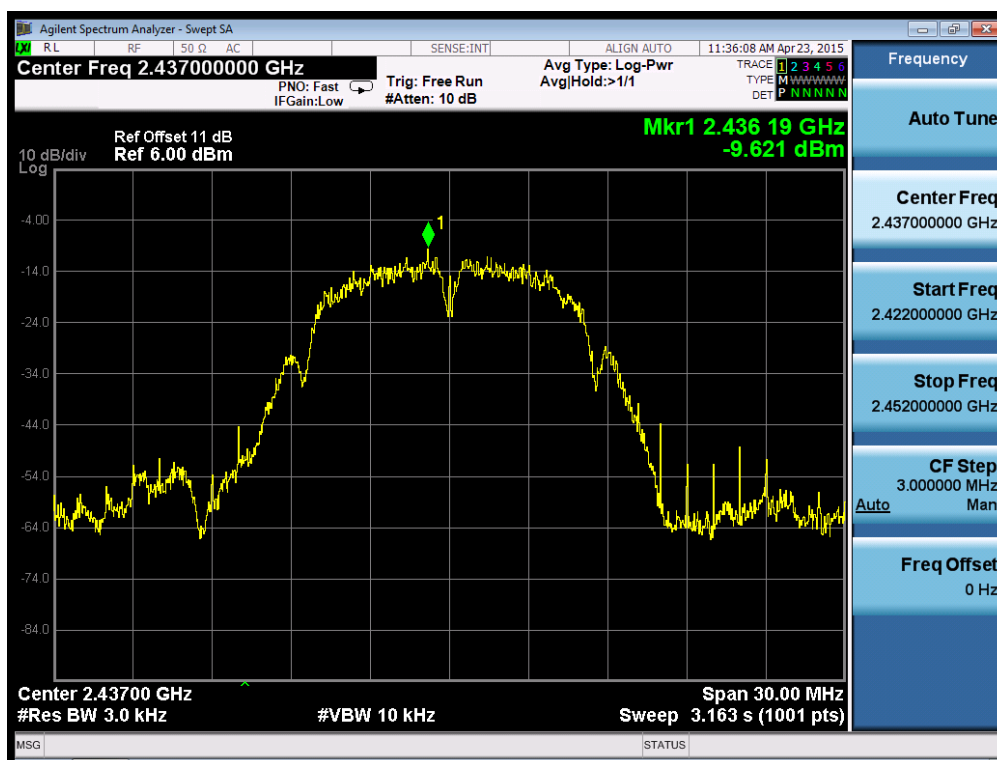

Channel 11 (2462MHz)

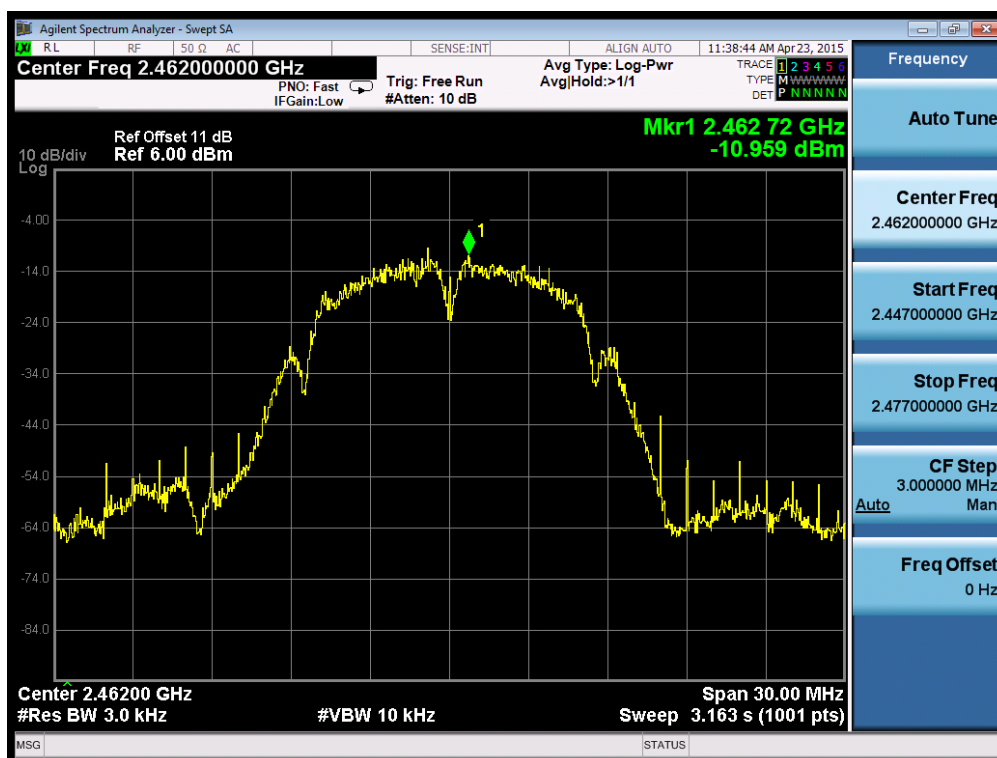




Test Item	Power Spectral Density
Test Mode	Transmit by 802.11g (Antenna 2)
Test Date	2015-4-23


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
01	2412	-13.016	8	Pass
06	2437	-15.403	8	Pass
11	2462	-15.700	8	Pass

Channel 01 (2412MHz)

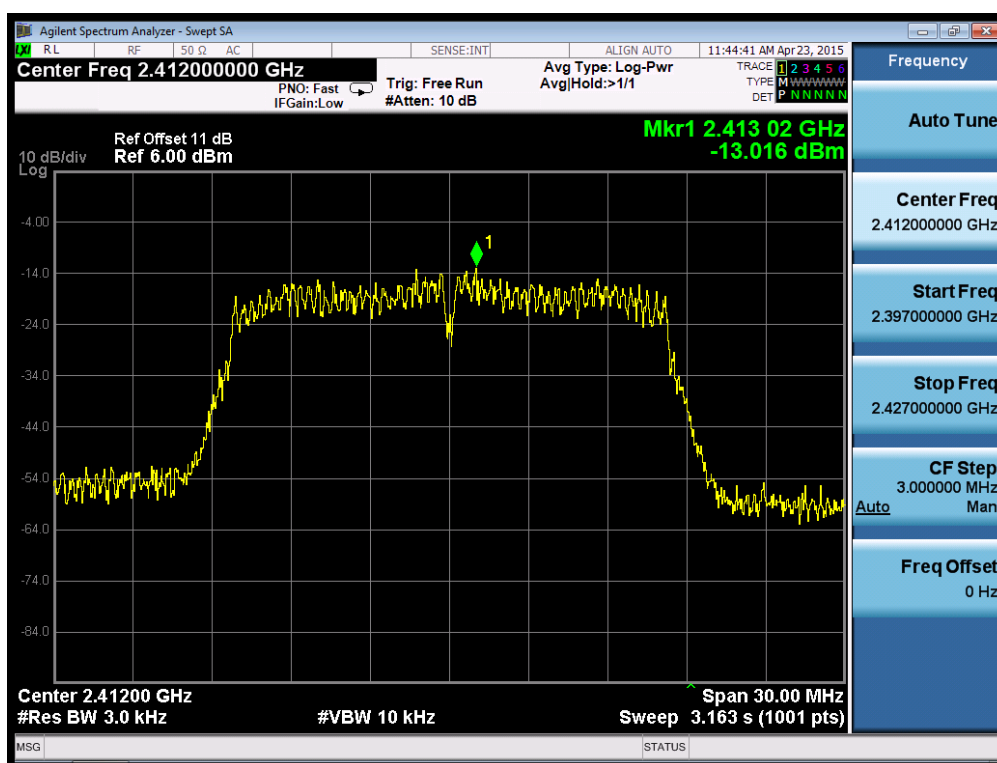




Channel 06 (2437MHz)

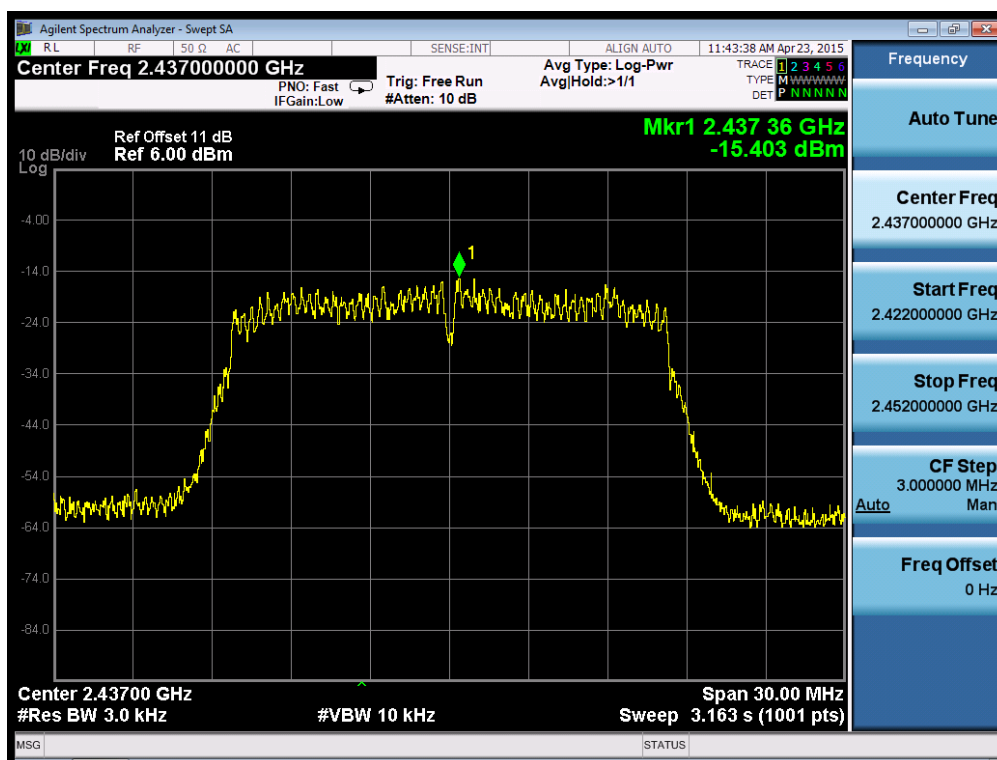

Channel 11 (2462MHz)

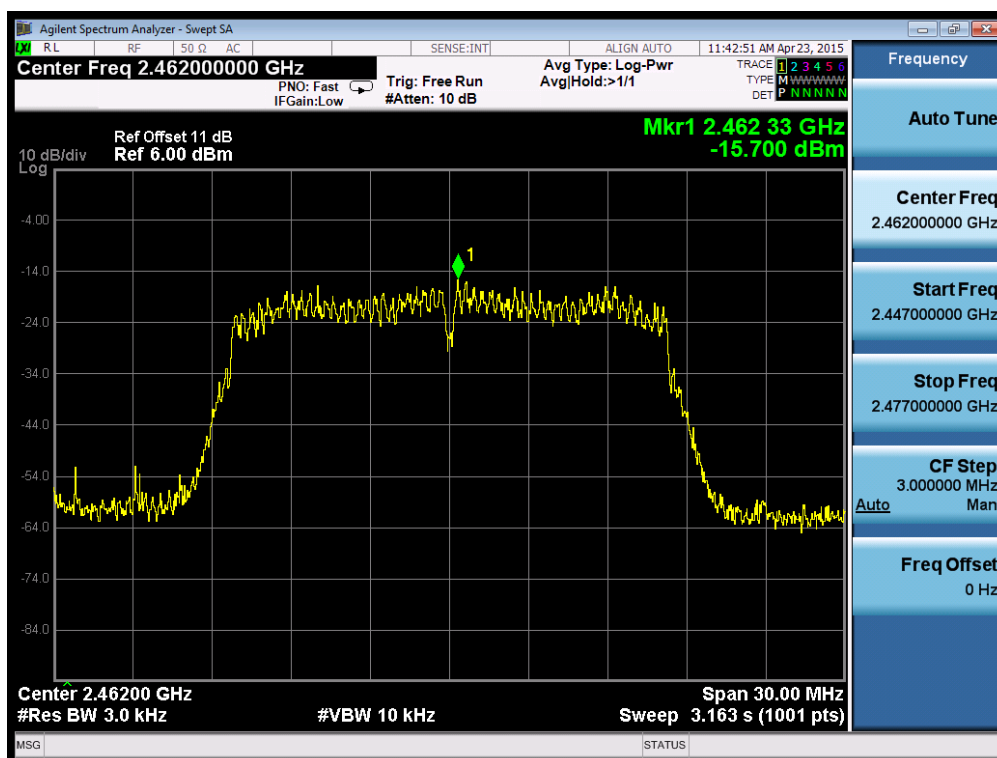




Test Item	Power Spectral Density
Test Mode	Transmit by 802.11n20 (20MHz) (Antenna 1)
Test Date	2015-4-23


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
01	2412	-15.017	8	Pass
06	2437	-16.321	8	Pass
11	2462	-18.002	8	Pass

Channel 01 (2412MHz)

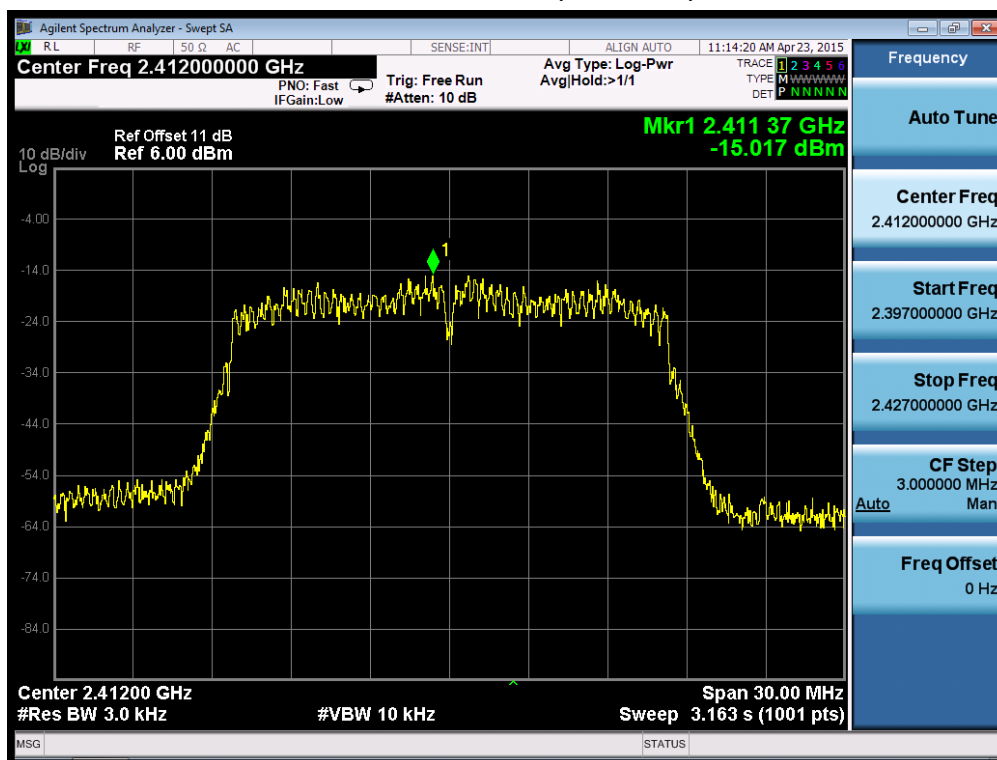




Channel 06 (2437MHz)

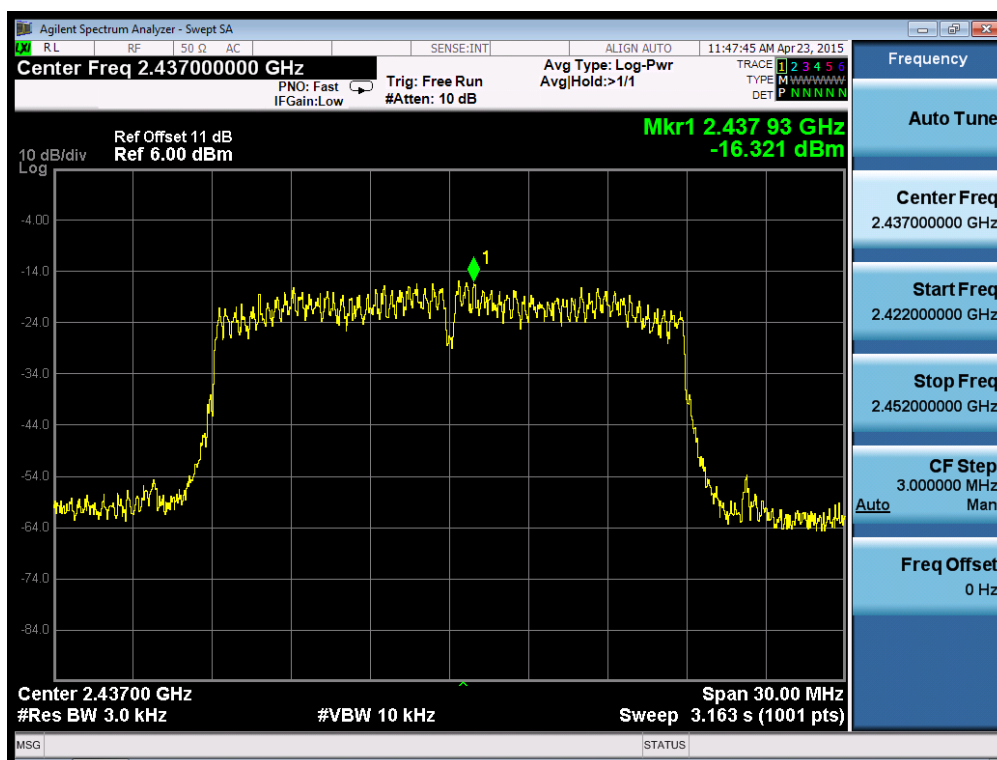

Channel 11 (2462MHz)

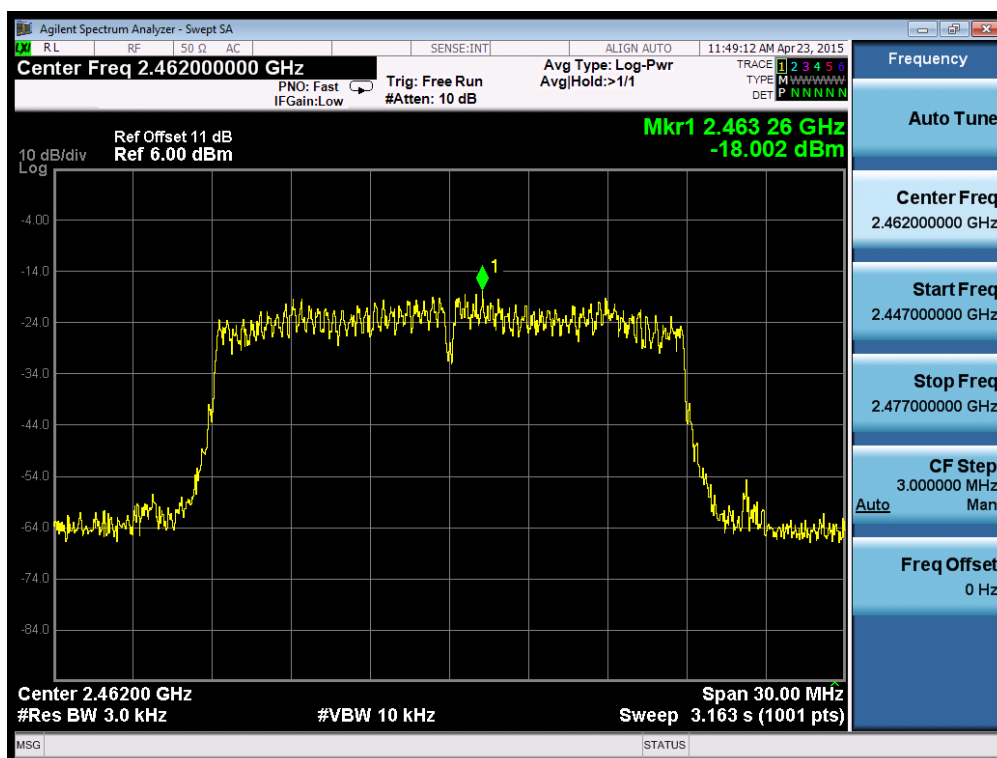




Test Item	Power Spectral Density
Test Mode	Transmit by 802.11n20 (20MHz) (Antenna 2)
Test Date	2015-4-23


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
01	2412	-15.934	8	Pass
06	2437	-15.700	8	Pass
11	2462	-16.935	8	Pass

Channel 01 (2412MHz)

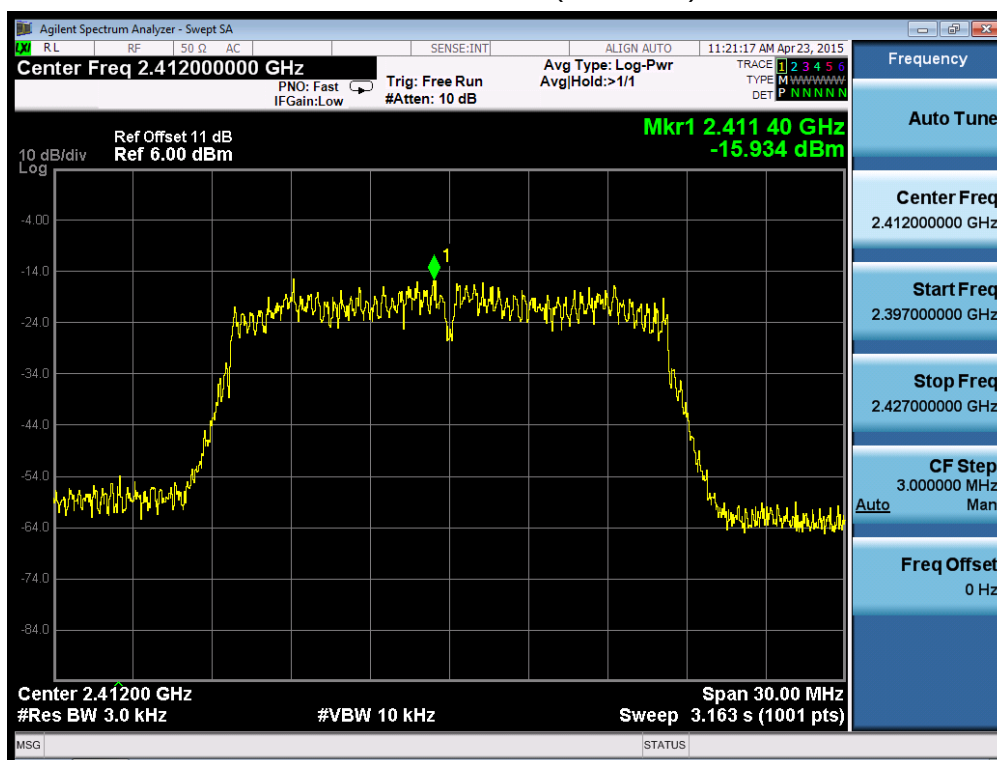




Channel 06 (2437MHz)

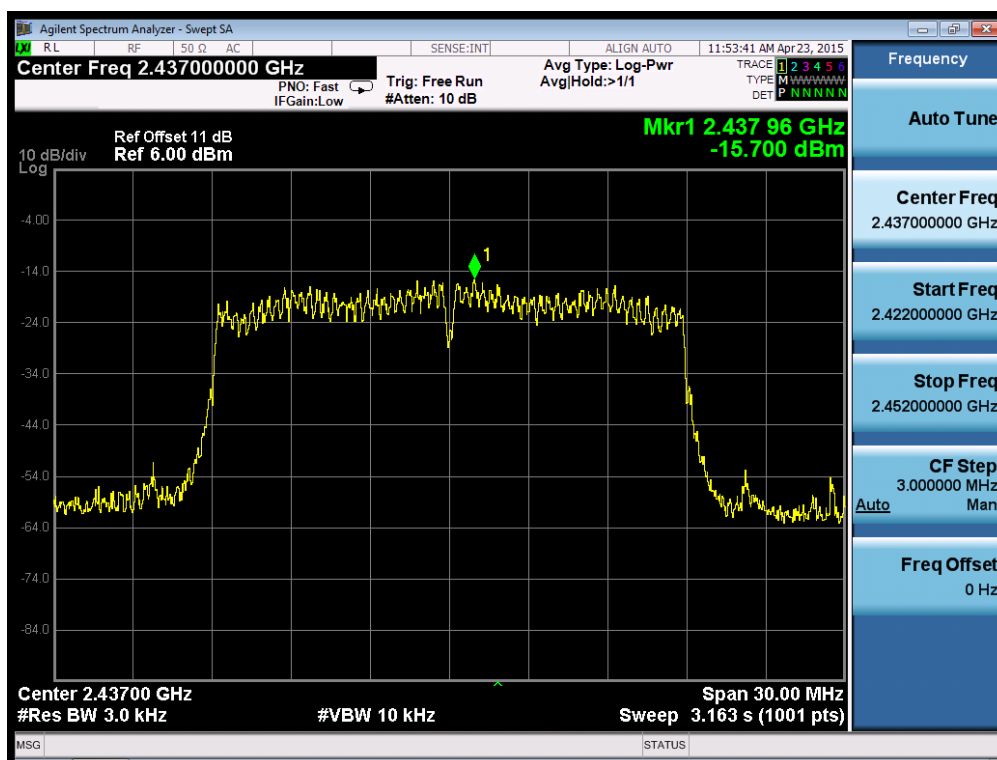

Channel 11 (2462MHz)

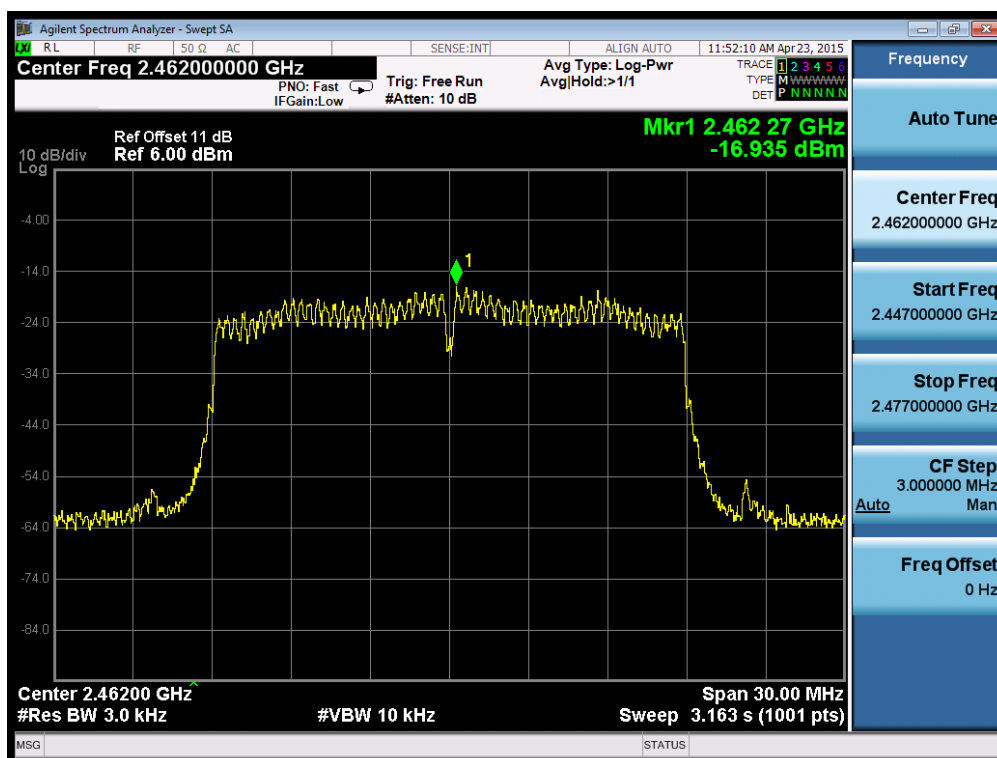




Test Item	Power Spectral Density
Test Mode	Transmit by 802.11n40(40MHz) (Antenna 1)
Test Date	2015-4-23


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
03	2422	-17.832	8	Pass
06	2437	-18.573	8	Pass
09	2452	-19.384	8	Pass

Channel 03 (2422MHz)

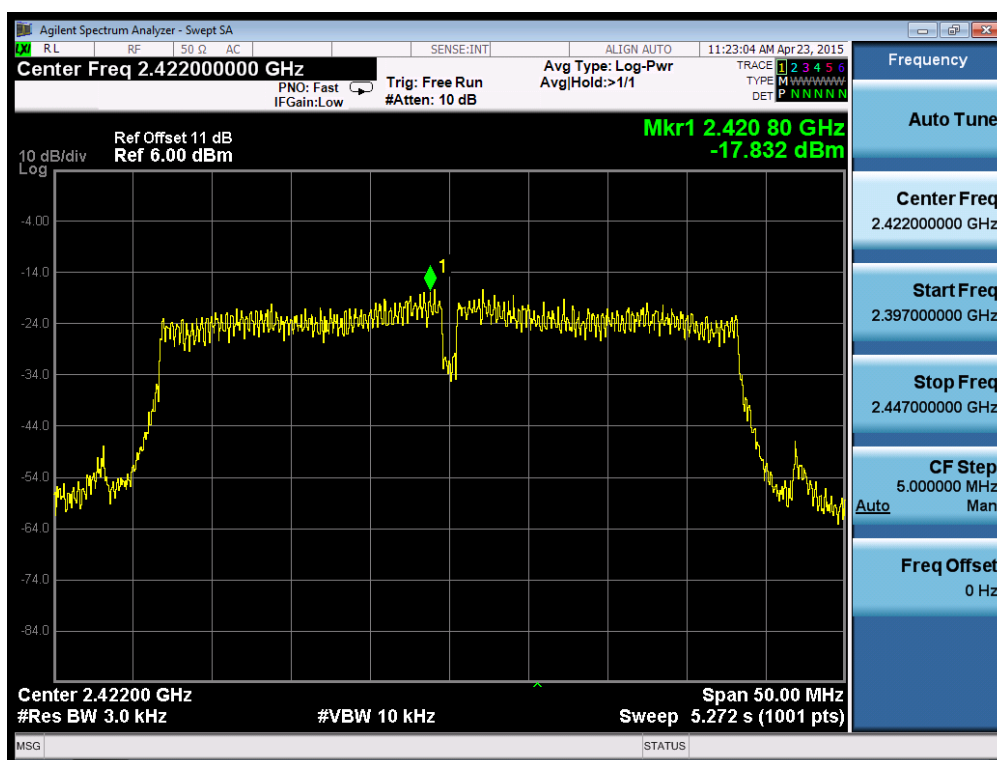




Channel 06 (2437MHz)

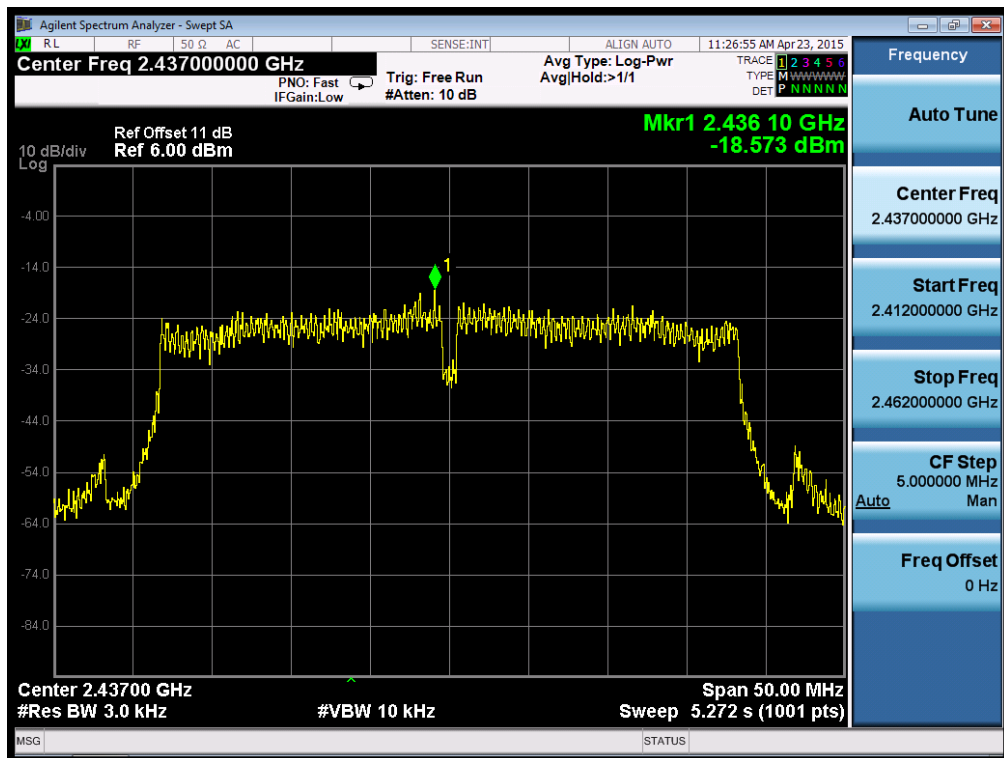

Channel 09 (2452MHz)

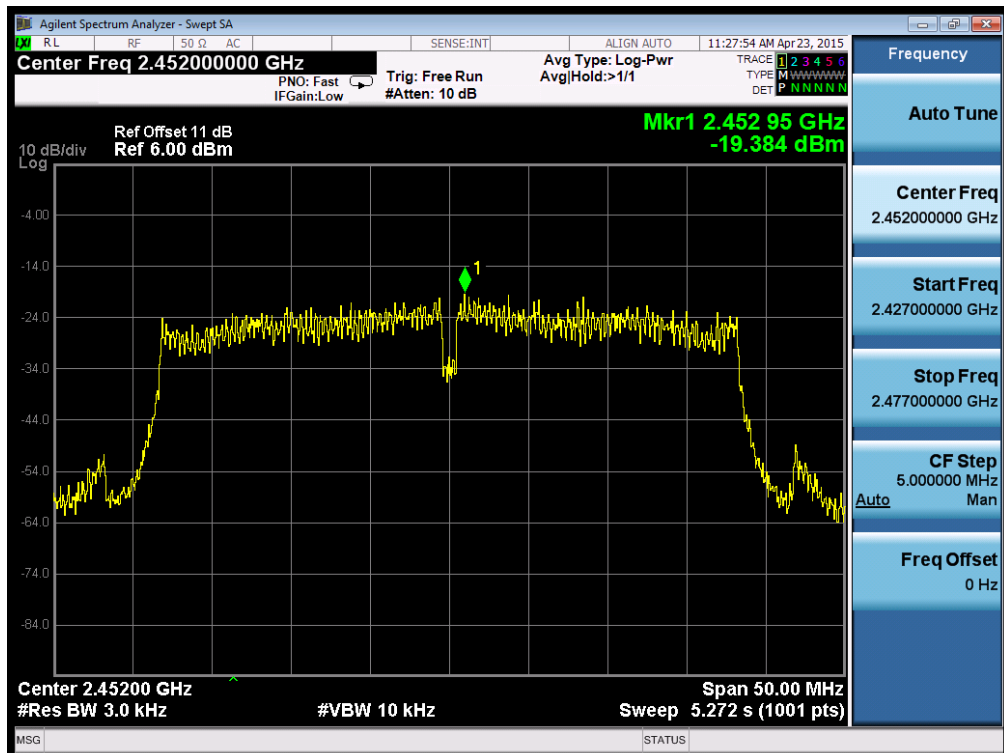




Test Item	Power Spectral Density
Test Mode	Transmit by 802.11n40(40MHz) (Antenna 2)
Test Date	2015-4-23


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
03	2422	-14.738	8	Pass
06	2437	-17.761	8	Pass
09	2452	-19.255	8	Pass

Channel 03 (2422MHz)

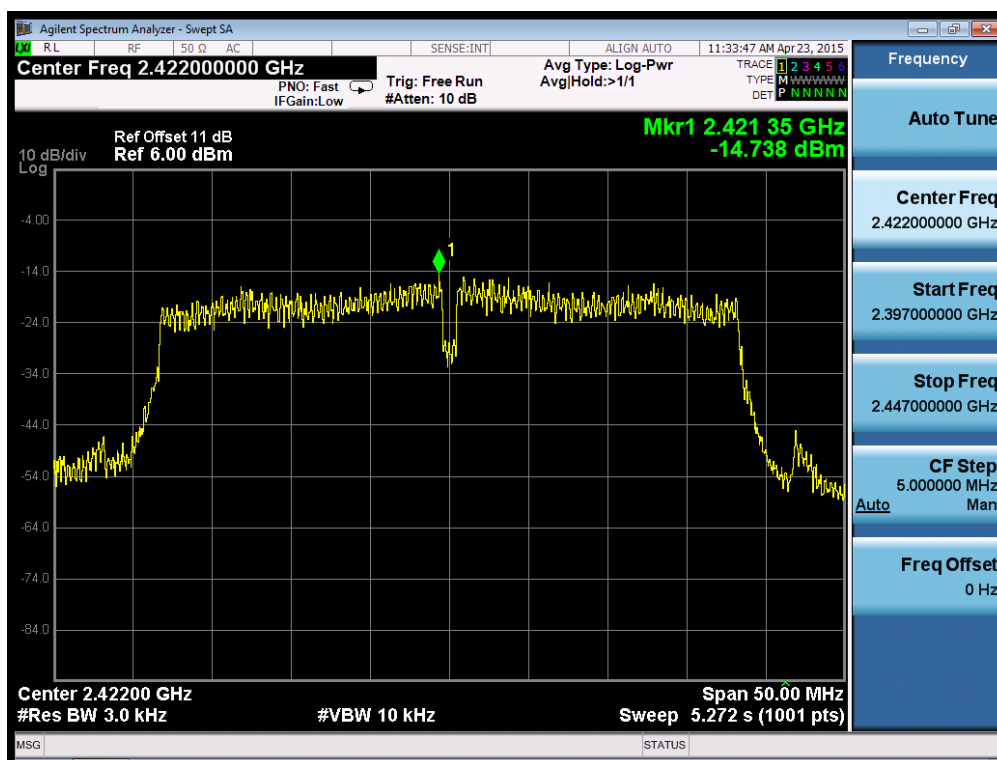




Channel 06 (2437MHz)

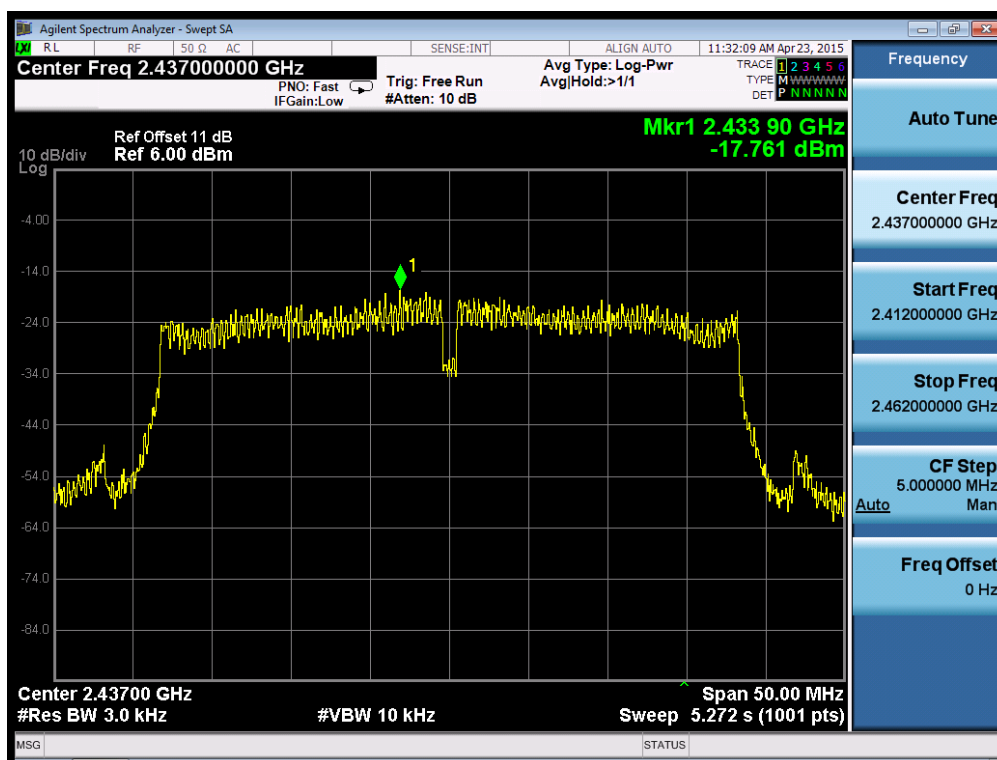

Channel 09 (2452MHz)

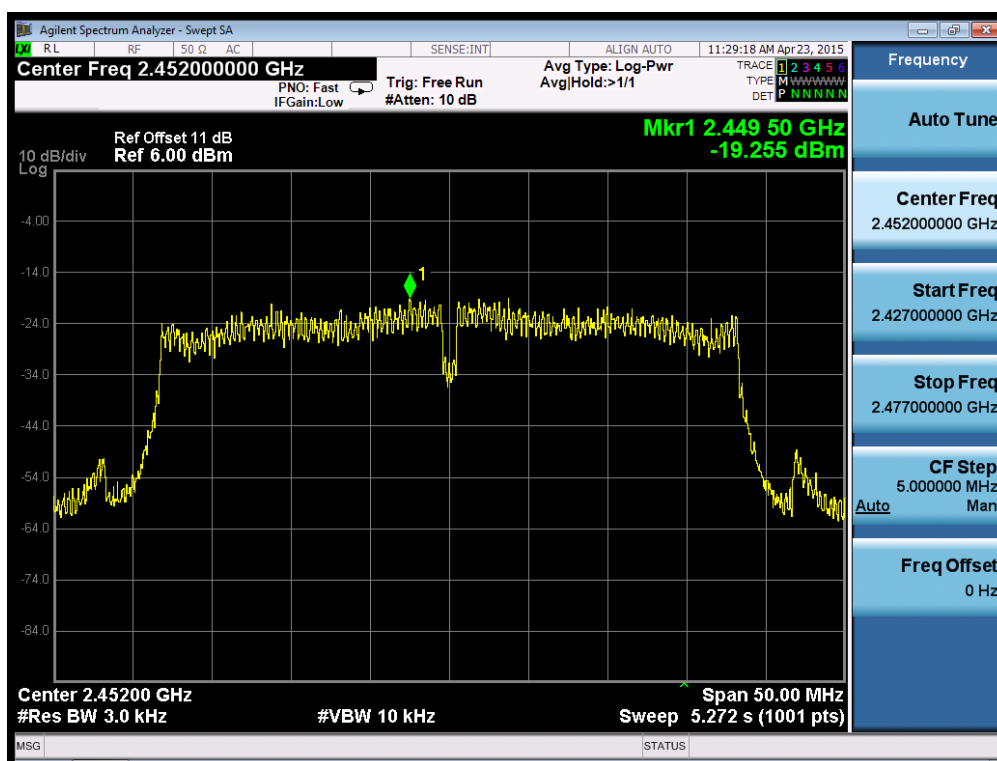



10. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

10.1 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.