

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	18.546M	16.448M	16M4D1D	18.282M	16.384M
802.11be EHT20_Nss1,(MCS0)_4TX	19.932M	18.909M	18M9D1D	19.8M	18.887M
802.11be EHT40_Nss1,(MCS0)_4TX	39.864M	37.824M	37M8D1D	39.6M	37.773M
802.11be EHT80_Nss1,(MCS0)_4TX	80.256M	77.56M	77M6D1D	80.256M	77.338M
802.11be EHT160_Nss1,(MCS0)_4TX	162.624M	157.157M	157MD1D	162.096M	156.402M
802.11be EHT320_Nss1,(MCS0)_4TX	329.472M	317.051M	317MD1D	327.36M	314.1M
6.425-6.525GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	18.612M	16.433M	16M4D1D	18.348M	16.396M
802.11be EHT20_Nss1,(MCS0)_4TX	19.932M	18.912M	18M9D1D	19.8M	18.877M
802.11be EHT40_Nss1,(MCS0)_4TX	39.864M	37.851M	37M9D1D	39.6M	37.776M
802.11be EHT80_Nss1,(MCS0)_4TX	80.4M	77.604M	77M6D1D	80.16M	77.376M
802.11be EHT160_Nss1,(MCS0)_4TX	162.48M	157.019M	157MD1D	162.24M	156.655M
802.11be EHT320_Nss1,(MCS0)_4TX	329.472M	317.202M	317MD1D	329.472M	316.385M
6.525-6.875GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	18.546M	16.433M	16M4D1D	18.348M	16.385M
802.11be EHT20_Nss1,(MCS0)_4TX	19.998M	18.907M	18M9D1D	19.8M	18.88M
802.11be EHT40_Nss1,(MCS0)_4TX	39.864M	37.862M	37M9D1D	39.6M	37.77M
802.11be EHT80_Nss1,(MCS0)_4TX	80.4M	77.574M	77M6D1D	80.256M	77.402M
802.11be EHT160_Nss1,(MCS0)_4TX	162.624M	156.929M	157MD1D	162.24M	156.605M
802.11be EHT320_Nss1,(MCS0)_4TX	461.472M	318.001M	318MD1D	328.416M	315.929M
6.875-7.125GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	18.546M	16.409M	16M4D1D	18.348M	16.377M
802.11be EHT20_Nss1,(MCS0)_4TX	19.998M	18.909M	18M9D1D	19.8M	18.88M
802.11be EHT40_Nss1,(MCS0)_4TX	39.732M	37.849M	37M8D1D	39.6M	37.773M
802.11be EHT80_Nss1,(MCS0)_4TX	80.256M	77.531M	77M5D1D	80.256M	77.383M
802.11be EHT160_Nss1,(MCS0)_4TX	162.624M	157.121M	157MD1D	162.096M	156.642M

Max-N dB = Maximum 26dB down bandwidth

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 26dB down bandwidth

Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11a_Nss1,(6Mbps)_4TX										
5955MHz	Pass	Inf	18.414M	16.406M	18.282M	16.401M	18.414M	16.421M	18.348M	16.395M
6175MHz	Pass	Inf	18.48M	16.415M	18.48M	16.419M	18.348M	16.397M	18.48M	16.396M
6415MHz	Pass	Inf	18.546M	16.402M	18.414M	16.397M	18.48M	16.448M	18.348M	16.384M
6435MHz	Pass	Inf	18.612M	16.418M	18.414M	16.433M	18.612M	16.41M	18.348M	16.396M
6475MHz	Pass	Inf	18.348M	16.418M	18.414M	16.415M	18.414M	16.42M	18.414M	16.406M
6515MHz	Pass	Inf	18.48M	16.406M	18.348M	16.398M	18.414M	16.396M	18.348M	16.408M
6535MHz	Pass	Inf	18.48M	16.405M	18.48M	16.407M	18.48M	16.412M	18.546M	16.397M
6715MHz	Pass	Inf	18.414M	16.415M	18.348M	16.41M	18.414M	16.4M	18.414M	16.391M
6855MHz	Pass	Inf	18.48M	16.432M	18.414M	16.385M	18.546M	16.417M	18.48M	16.396M
6875MHz Straddle 6.525-6.875GHz	Pass	Inf	18.45M	16.433M	18.39M	16.393M	18.51M	16.415M	18.39M	16.402M
6895MHz	Pass	Inf	18.414M	16.391M	18.546M	16.377M	18.348M	16.407M	18.348M	16.395M
7015MHz	Pass	Inf	18.48M	16.407M	18.348M	16.402M	18.348M	16.386M	18.48M	16.396M
7095MHz	Pass	Inf	18.48M	16.409M	18.414M	16.398M	18.48M	16.394M	18.414M	16.4M
802.11be EHT20_Nss1,(MCS0)_4TX										
5955MHz	Pass	Inf	19.932M	18.894M	19.866M	18.9M	19.866M	18.887M	19.866M	18.905M
6175MHz	Pass	Inf	19.932M	18.895M	19.8M	18.905M	19.932M	18.901M	19.866M	18.89M
6415MHz	Pass	Inf	19.932M	18.9M	19.932M	18.909M	19.8M	18.887M	19.8M	18.893M
6435MHz	Pass	Inf	19.866M	18.899M	19.866M	18.909M	19.866M	18.877M	19.866M	18.879M
6475MHz	Pass	Inf	19.932M	18.899M	19.866M	18.892M	19.866M	18.9M	19.866M	18.89M
6515MHz	Pass	Inf	19.932M	18.899M	19.932M	18.912M	19.932M	18.901M	19.8M	18.888M
6535MHz	Pass	Inf	19.932M	18.903M	19.866M	18.887M	19.8M	18.907M	19.866M	18.896M
6715MHz	Pass	Inf	19.998M	18.898M	19.932M	18.893M	19.932M	18.903M	19.8M	18.88M
6855MHz	Pass	Inf	19.932M	18.88M	19.8M	18.882M	19.866M	18.904M	19.866M	18.901M
6875MHz Straddle 6.525-6.875GHz	Pass	Inf	19.92M	18.903M	19.92M	18.902M	19.95M	18.894M	19.86M	18.887M
6895MHz	Pass	Inf	19.932M	18.886M	19.932M	18.881M	19.866M	18.889M	19.866M	18.896M
7015MHz	Pass	Inf	19.866M	18.909M	19.866M	18.895M	19.8M	18.88M	19.866M	18.885M
7095MHz	Pass	Inf	19.866M	18.9M	19.998M	18.898M	19.866M	18.895M	19.8M	18.886M
802.11be EHT40_Nss1,(MCS0)_4TX										
5965MHz	Pass	Inf	39.864M	37.8M	39.864M	37.801M	39.6M	37.824M	39.6M	37.773M
6165MHz	Pass	Inf	39.732M	37.809M	39.732M	37.789M	39.732M	37.786M	39.6M	37.823M
6405MHz	Pass	Inf	39.732M	37.797M	39.732M	37.797M	39.732M	37.824M	39.732M	37.819M
6445MHz	Pass	Inf	39.864M	37.825M	39.732M	37.781M	39.864M	37.819M	39.6M	37.821M
6485MHz	Pass	Inf	39.6M	37.813M	39.864M	37.851M	39.864M	37.813M	39.6M	37.776M
6525MHz Straddle 6.425-6.525GHz	Pass	Inf	39.84M	37.839M	39.78M	37.821M	39.66M	37.824M	39.78M	37.818M
6565MHz	Pass	Inf	39.732M	37.828M	39.6M	37.812M	39.864M	37.842M	39.732M	37.796M
6725MHz	Pass	Inf	39.6M	37.799M	39.732M	37.801M	39.864M	37.81M	39.6M	37.77M
6845MHz	Pass	Inf	39.732M	37.795M	39.732M	37.844M	39.864M	37.8M	39.732M	37.815M

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
6885MHz Straddle 6.525-6.875GHz	Pass	Inf	39.84M	37.862M	39.84M	37.845M	39.84M	37.796M	39.6M	37.814M
6925MHz	Pass	Inf	39.732M	37.794M	39.732M	37.849M	39.732M	37.825M	39.732M	37.839M
7005MHz	Pass	Inf	39.732M	37.815M	39.6M	37.819M	39.732M	37.818M	39.6M	37.814M
7085MHz	Pass	Inf	39.732M	37.844M	39.732M	37.833M	39.6M	37.809M	39.6M	37.773M
802.11be EHT80_Nss1,(MCS0)_4TX										
5985MHz	Pass	Inf	80.256M	77.501M	80.256M	77.405M	80.256M	77.355M	80.256M	77.457M
6145MHz	Pass	Inf	80.256M	77.461M	80.256M	77.456M	80.256M	77.483M	80.256M	77.56M
6385MHz	Pass	Inf	80.256M	77.46M	80.256M	77.338M	80.256M	77.502M	80.256M	77.464M
6465MHz	Pass	Inf	80.256M	77.376M	80.256M	77.481M	80.256M	77.599M	80.256M	77.479M
6545MHz Straddle 6.425-6.525GHz	Pass	Inf	80.16M	77.604M	80.4M	77.435M	80.16M	77.586M	80.28M	77.543M
6625MHz	Pass	Inf	80.256M	77.536M	80.256M	77.471M	80.256M	77.525M	80.256M	77.552M
6705MHz	Pass	Inf	80.256M	77.574M	80.256M	77.569M	80.256M	77.402M	80.256M	77.442M
6785MHz	Pass	Inf	80.256M	77.495M	80.256M	77.503M	80.256M	77.439M	80.256M	77.44M
6865MHz Straddle 6.525-6.875GHz	Pass	Inf	80.28M	77.555M	80.4M	77.411M	80.28M	77.402M	80.4M	77.545M
6945MHz	Pass	Inf	80.256M	77.383M	80.256M	77.43M	80.256M	77.427M	80.256M	77.483M
7025MHz	Pass	Inf	80.256M	77.531M	80.256M	77.41M	80.256M	77.518M	80.256M	77.478M
802.11be EHT160_Nss1,(MCS0)_4TX										
6025MHz	Pass	Inf	162.624M	156.882M	162.624M	156.882M	162.624M	156.642M	162.624M	156.402M
6185MHz	Pass	Inf	162.624M	157.059M	162.624M	157.018M	162.624M	156.923M	162.624M	157.157M
6345MHz	Pass	Inf	162.096M	156.8M	162.096M	156.989M	162.096M	156.755M	162.624M	156.769M
6505MHz Straddle 6.425-6.525GHz	Pass	Inf	162.48M	156.763M	162.24M	156.655M	162.24M	157.019M	162.24M	156.676M
6665MHz	Pass	Inf	162.624M	156.913M	162.624M	156.922M	162.624M	156.82M	162.624M	156.929M
6825MHz Straddle 6.525-6.875GHz	Pass	Inf	162.24M	156.605M	162.48M	156.682M	162.24M	156.66M	162.48M	156.902M
6985MHz	Pass	Inf	162.096M	156.642M	162.096M	156.642M	162.624M	156.882M	162.624M	157.121M
802.11be EHT320_Nss1,(MCS0)_4TX										
6105MHz	Pass	Inf	328.416M	314.972M	328.416M	314.1M	328.416M	315.264M	329.472M	314.672M
6265MHz	Pass	Inf	328.416M	316.341M	329.472M	315.713M	328.416M	316.488M	328.416M	315.564M
6425MHz Straddle 5.925-6.425GHz	Fail	Inf	327.36M	315.743M	329.472M	316.328M	329.472M	316.133M	328.416M	317.051M
6585MHz Straddle 6.425-6.525GHz	Pass	Inf	329.472M	317.202M	329.472M	316.423M	329.472M	316.385M	329.472M	316.775M
6745MHz Straddle 6.525-6.875GHz	Pass	Inf	328.416M	315.968M	417.12M	317.428M	328.416M	316.177M	461.472M	317.272M
6905MHz Straddle 6.525-6.875GHz	Pass	Inf	402.336M	318.001M	329.472M	316.301M	328.416M	315.929M	356.928M	317.057M

Port X-N dB = 26dB down bandwidth



Port X-OBW = Port X 99% occupied bandwidth



5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

EBW



5955MHz

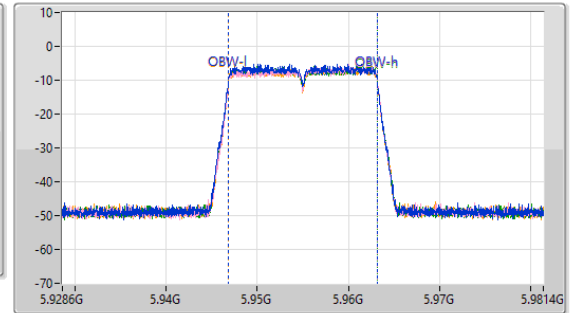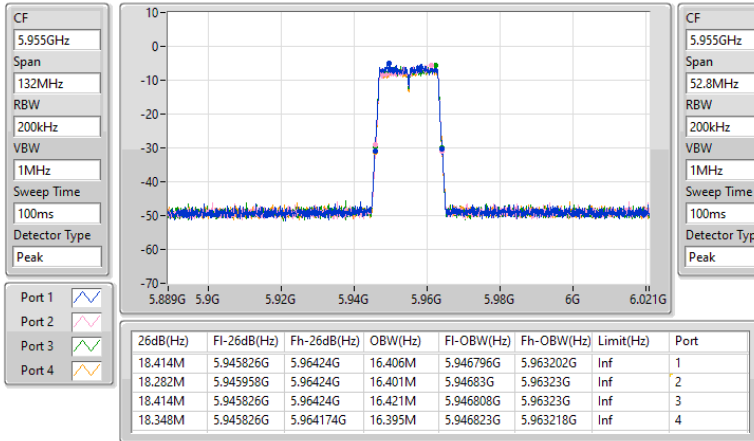

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

6175MHz

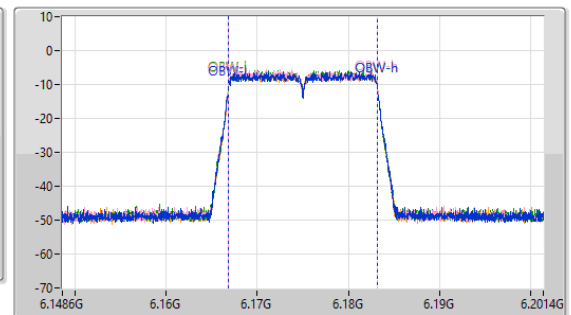
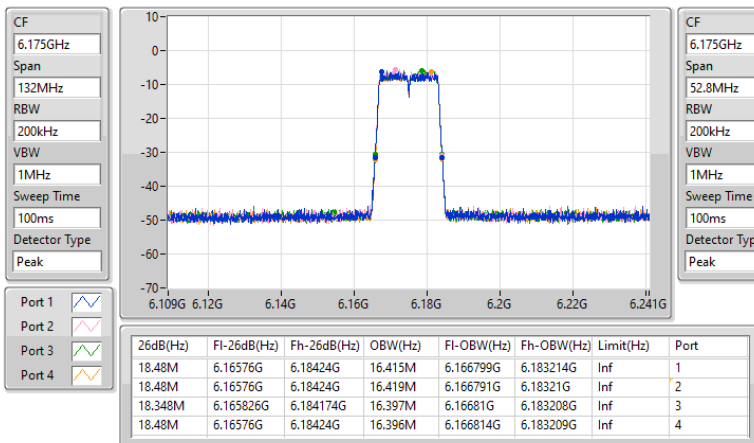




5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

EBW



6415MHz

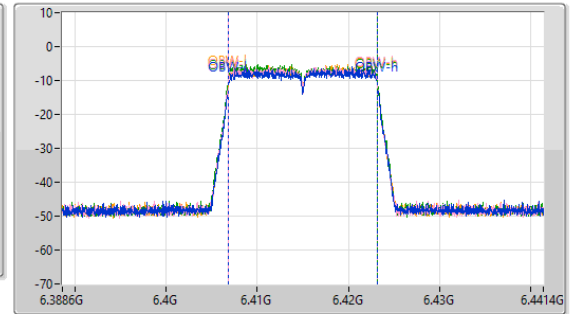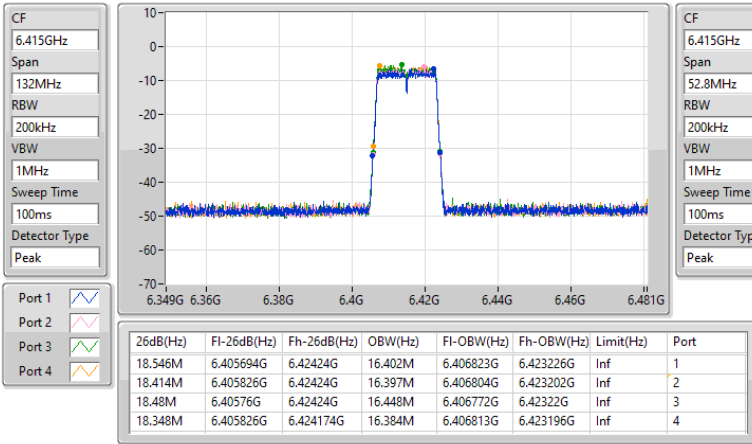

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

6435MHz

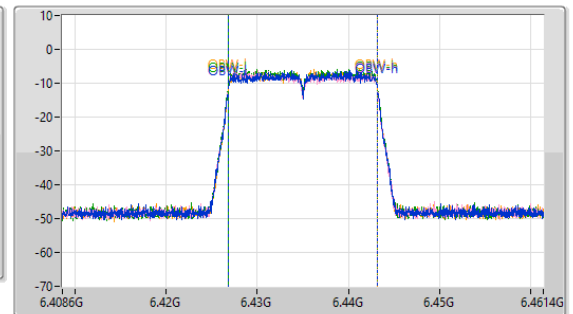
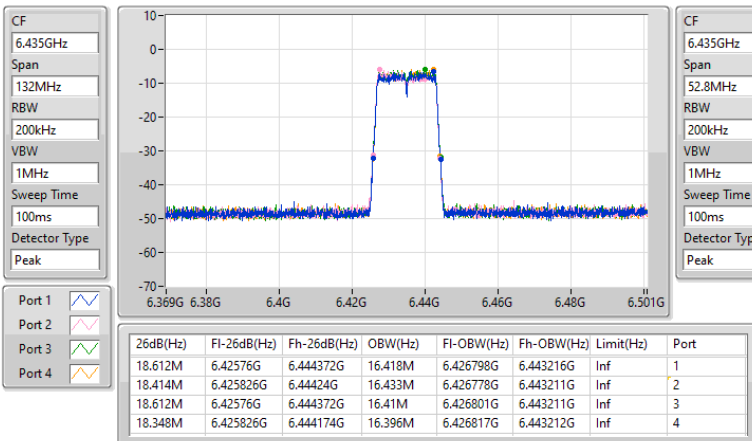




6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

EBW



6475MHz

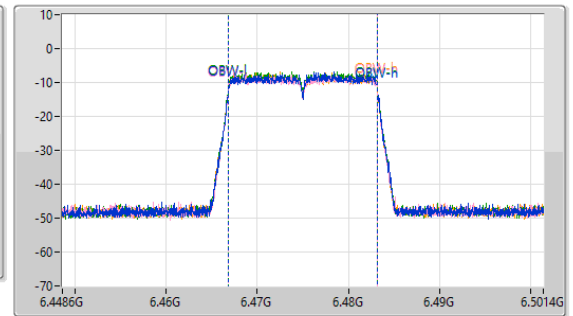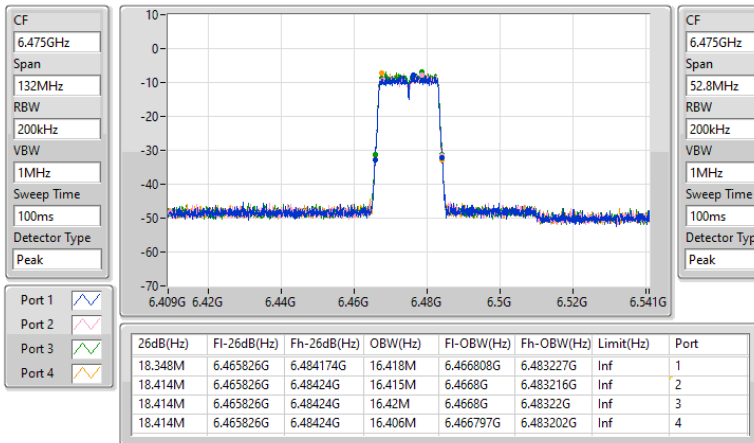

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

6515MHz

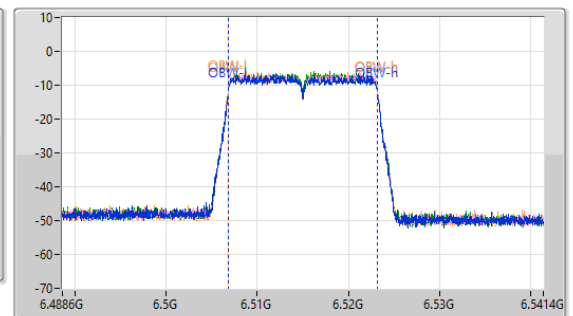
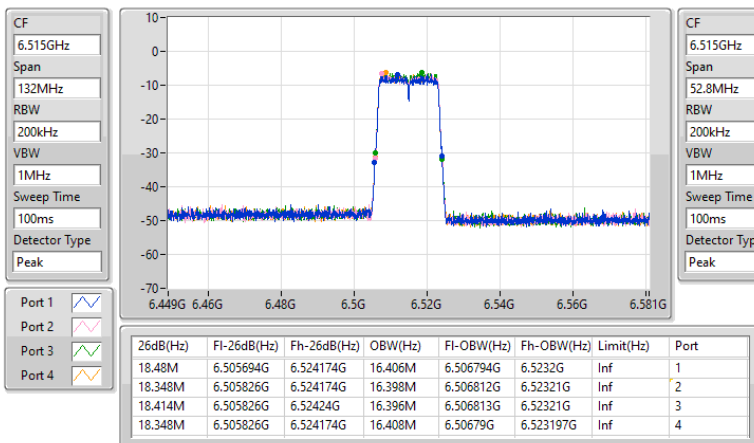




6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

EBW



6535MHz

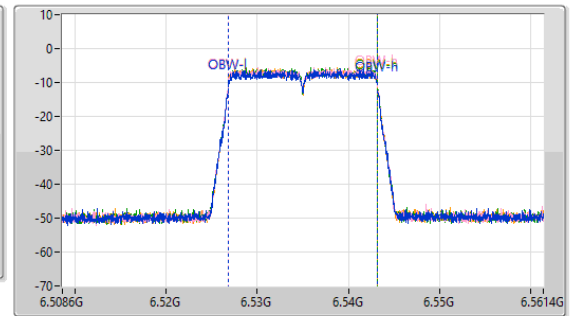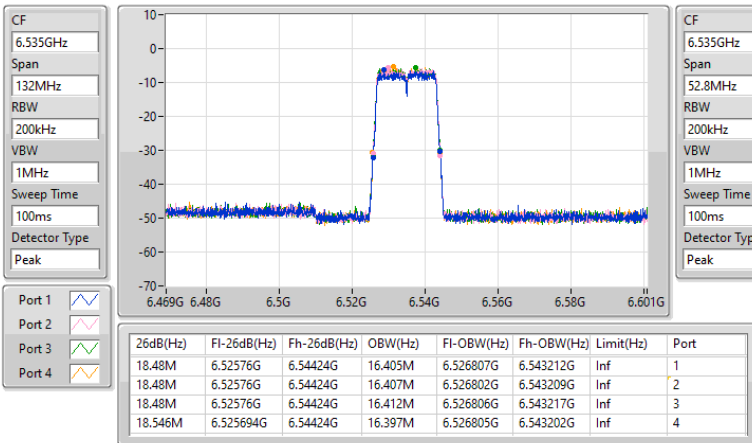

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

6715MHz

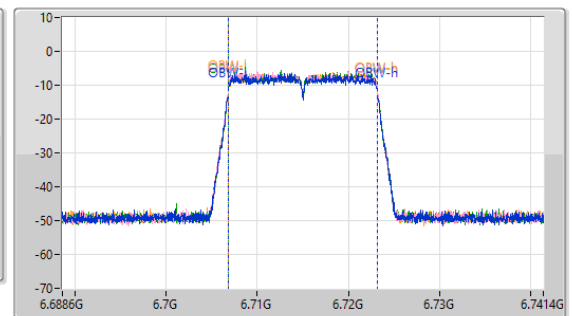
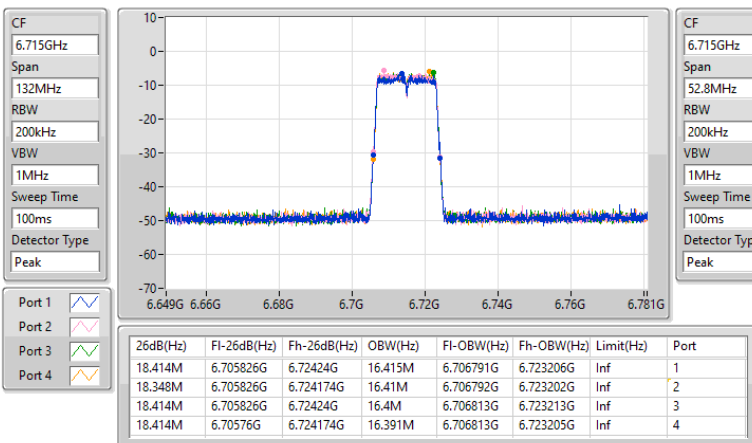




6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

EBW



6855MHz

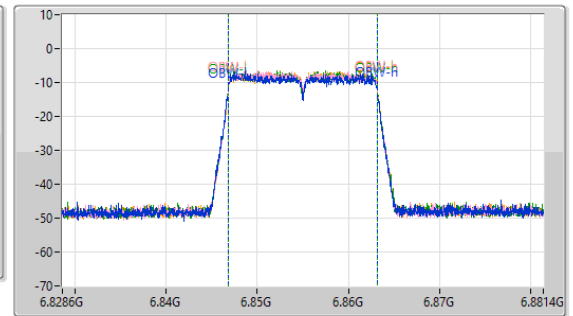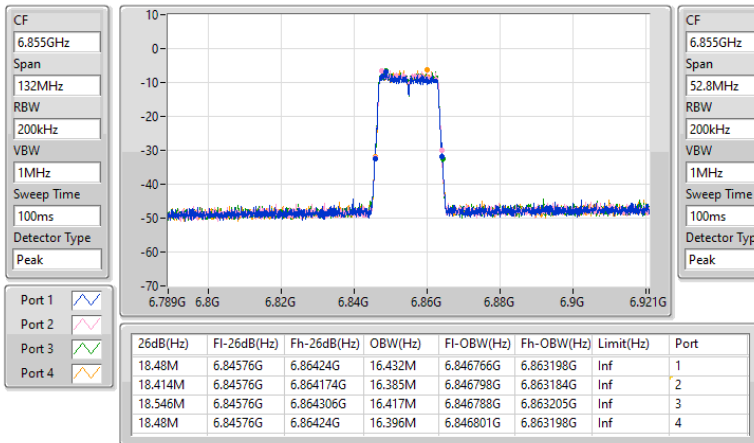

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

6875MHz Straddle 6.525-6.875GHz

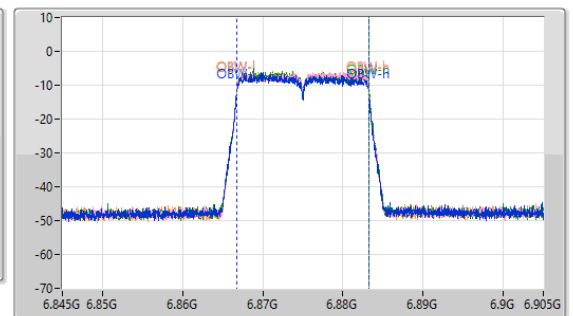
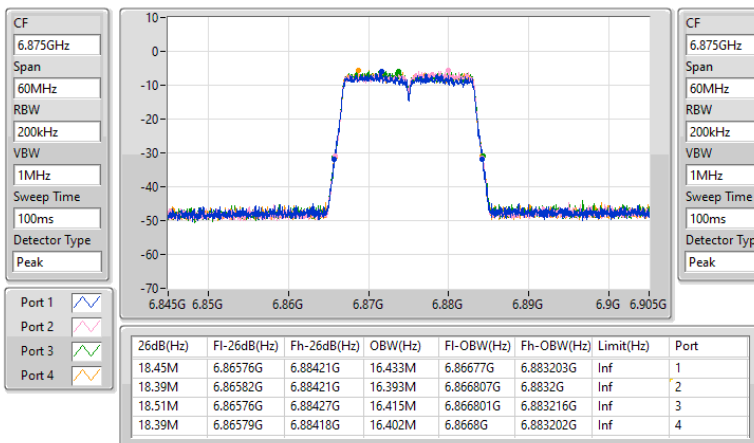




6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

EBW



6895MHz

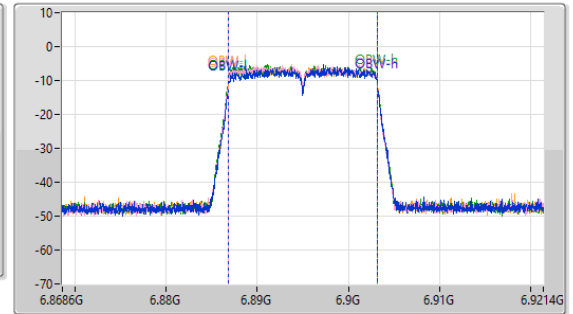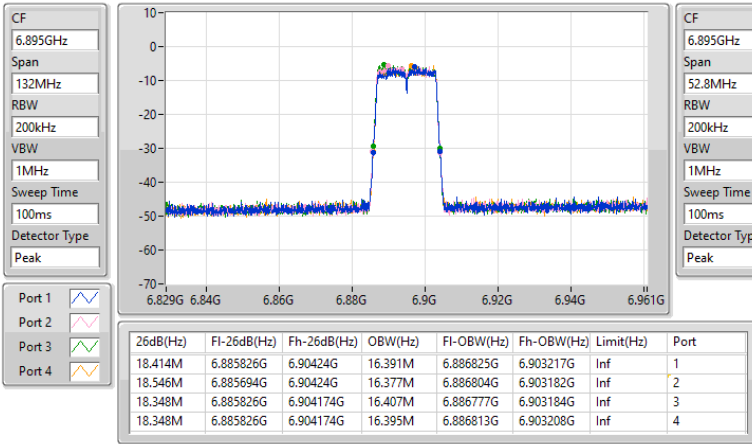

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

7015MHz

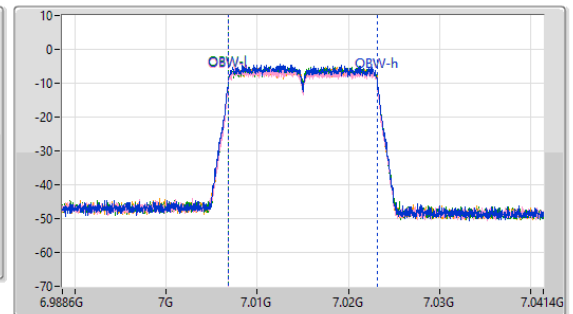
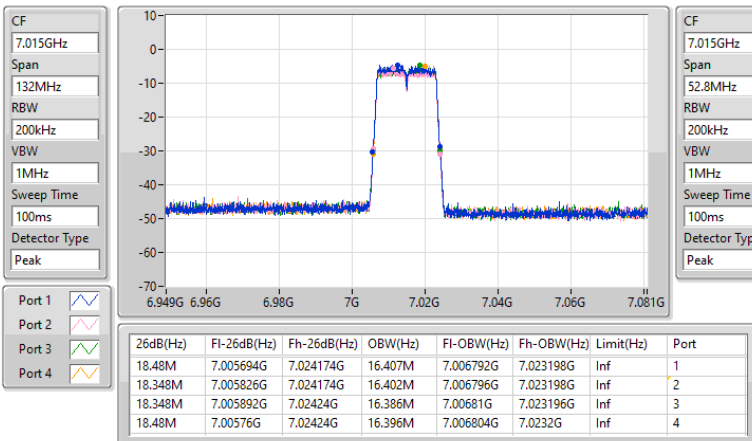




6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

EBW



7095MHz

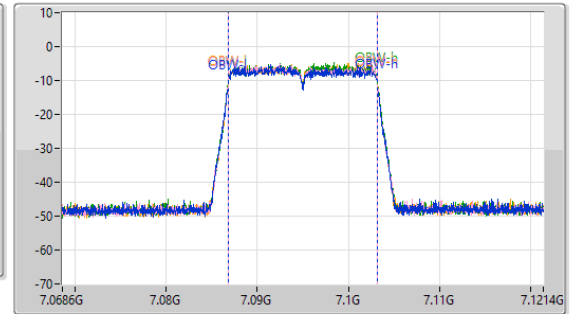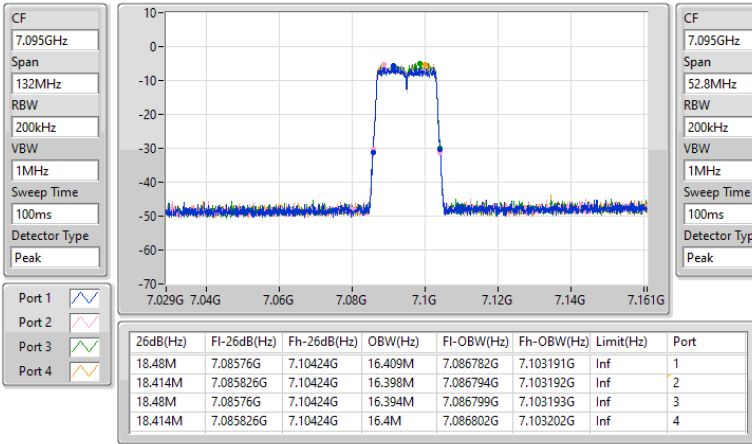

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5955MHz

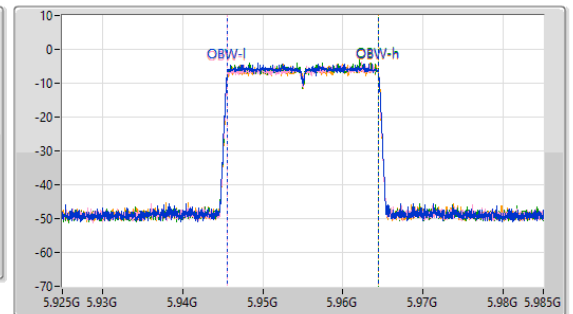
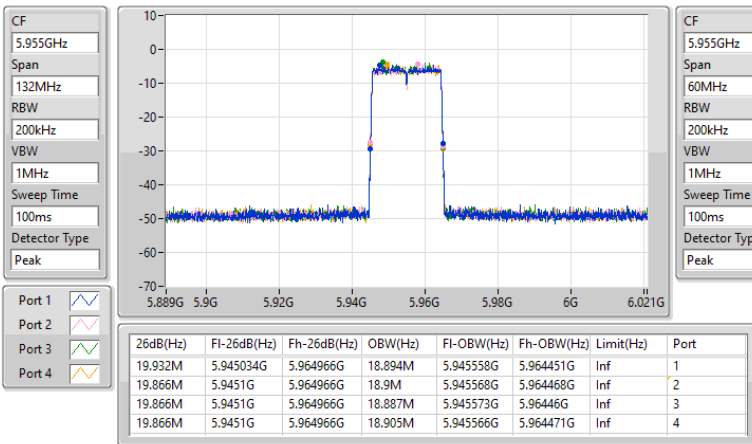




5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



6175MHz

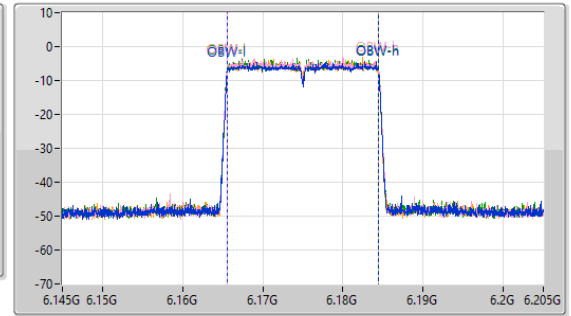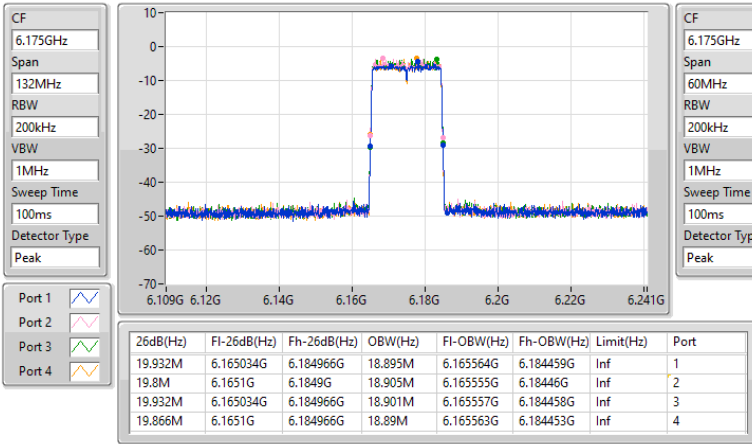

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6415MHz

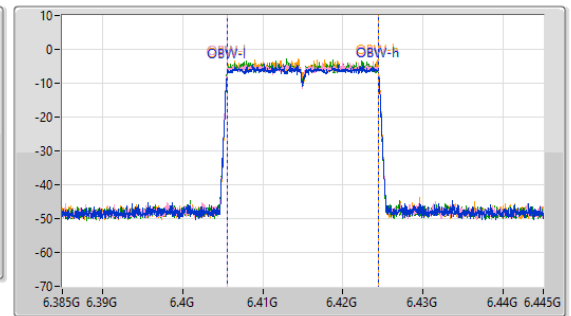
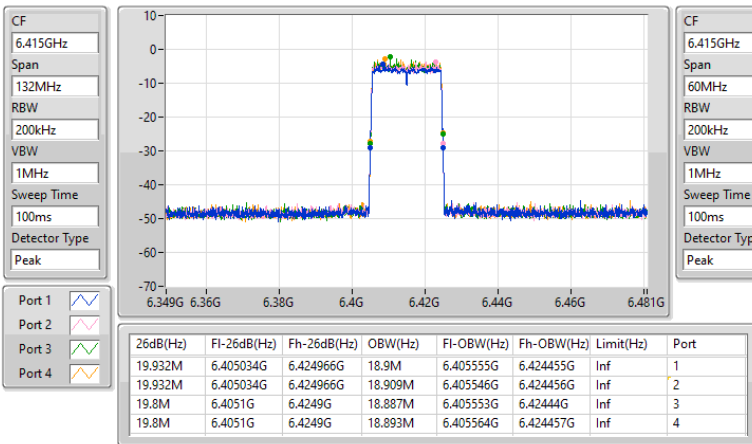




6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



6435MHz

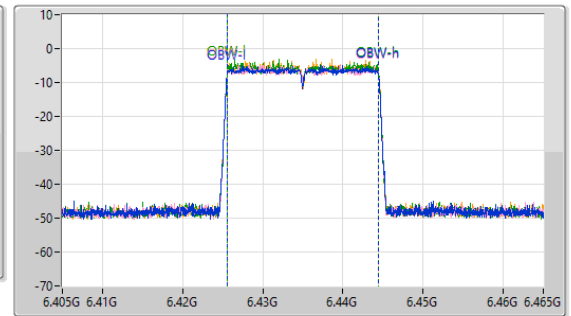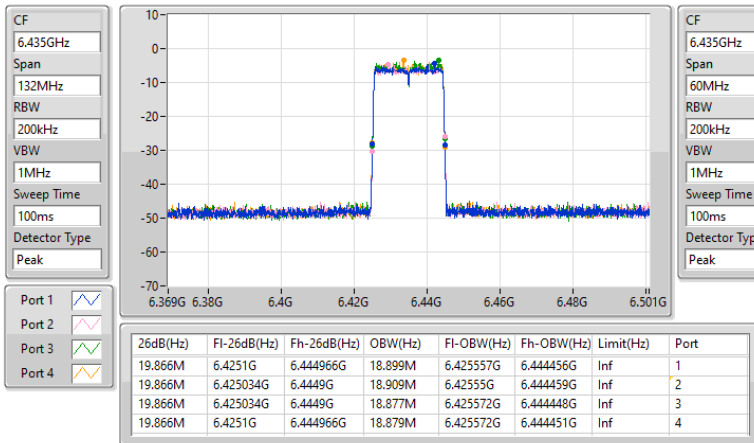

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6475MHz

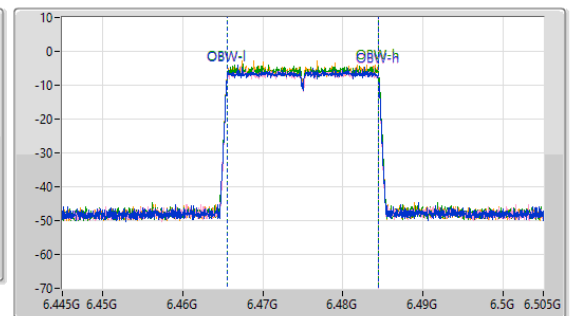
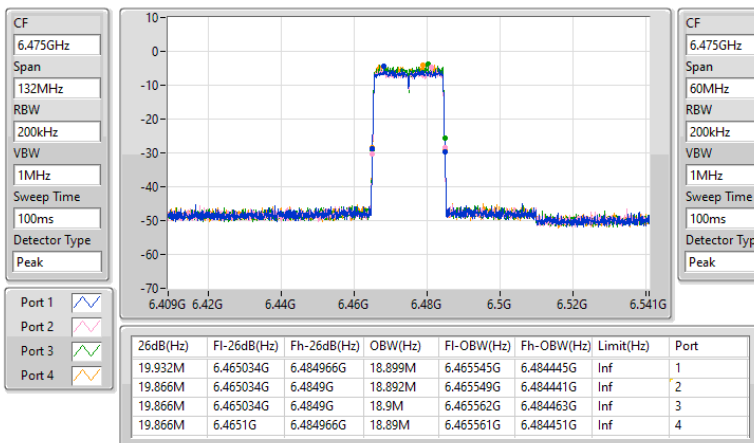




6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



6515MHz

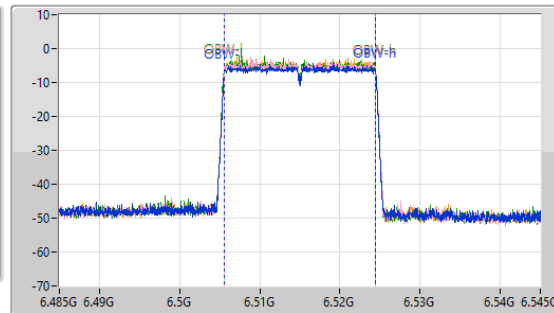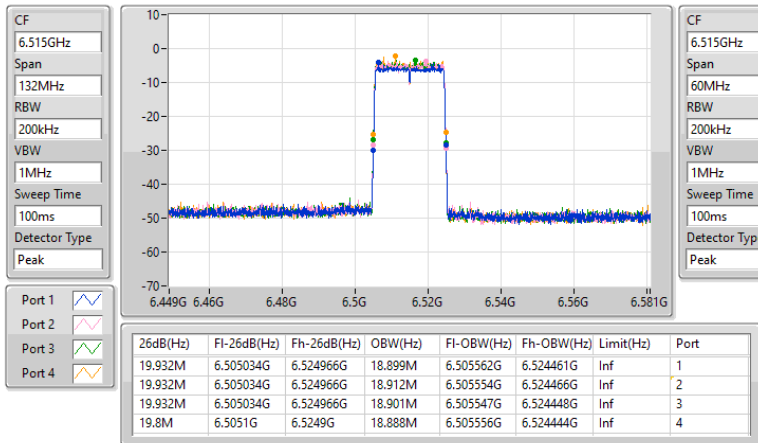

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6535MHz

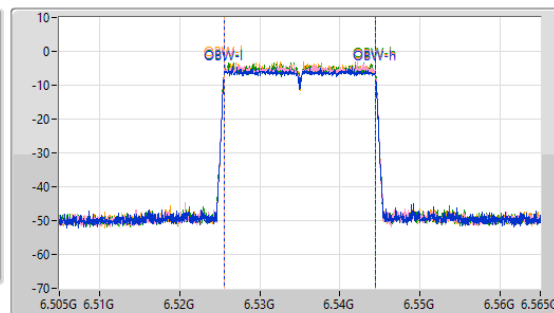
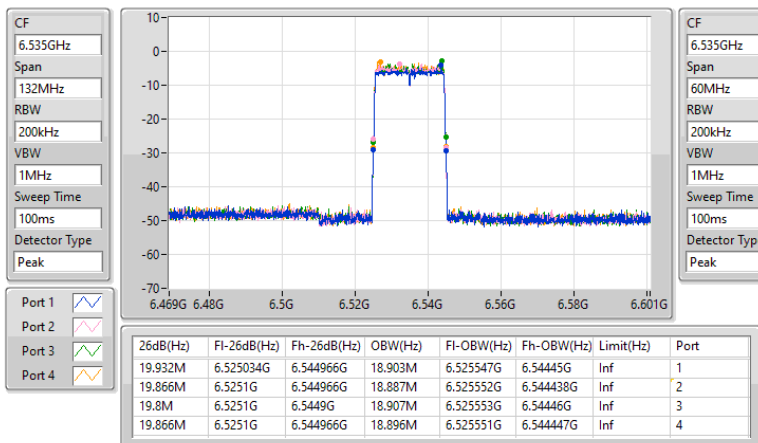




6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



6715MHz

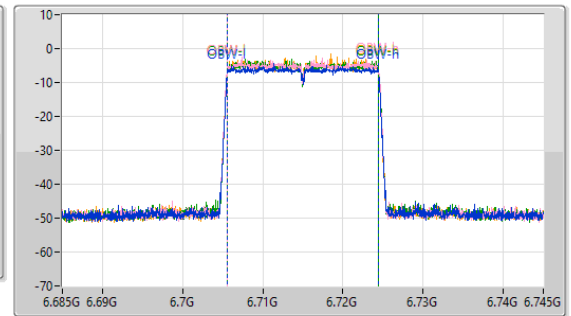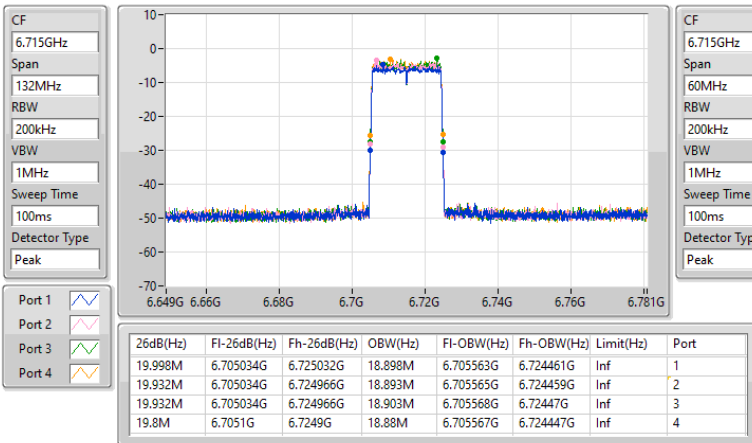

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6855MHz

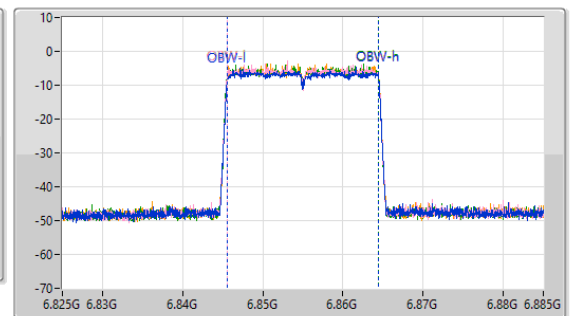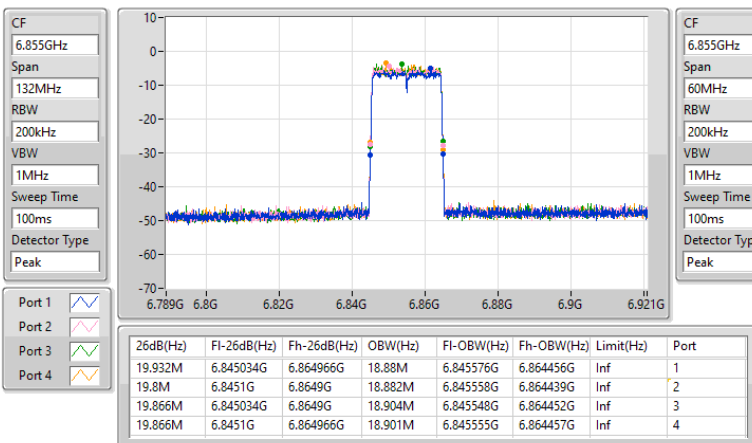




6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


6875MHz Straddle 6.525-6.875GHz

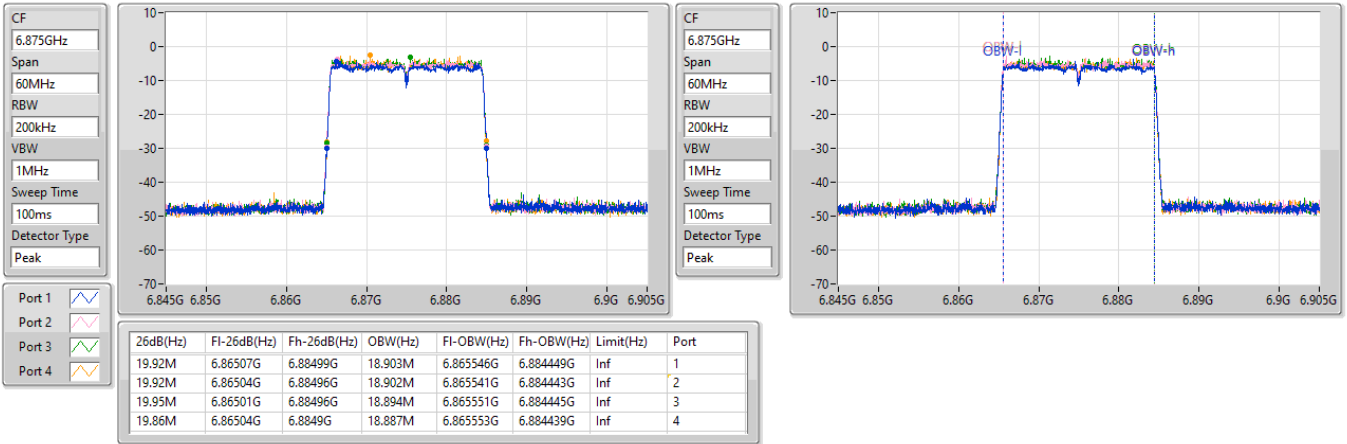

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



6895MHz

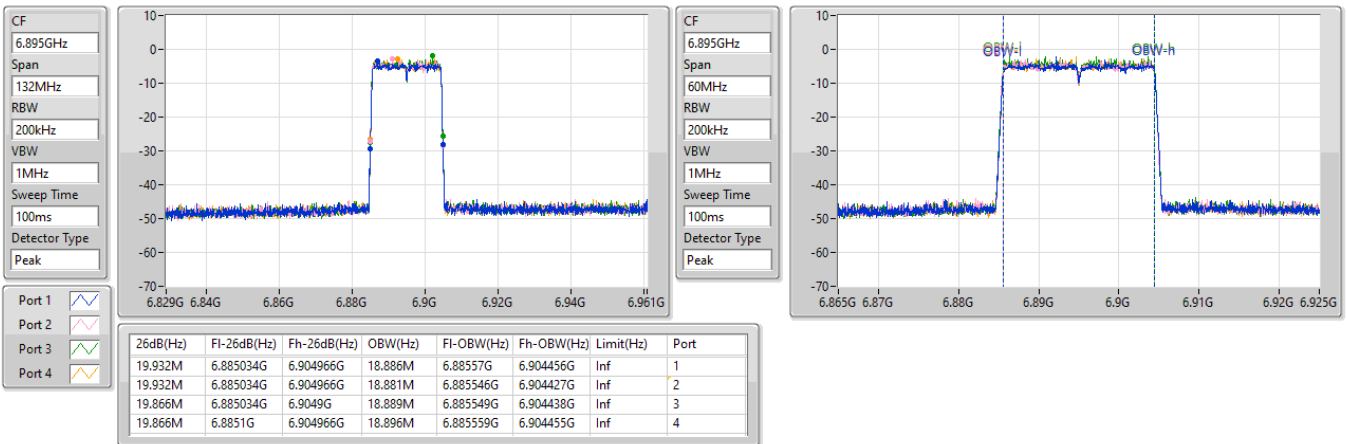

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



7015MHz

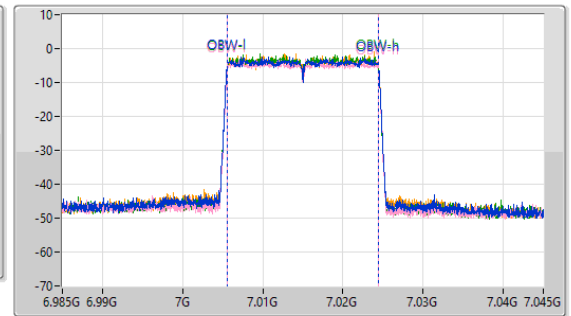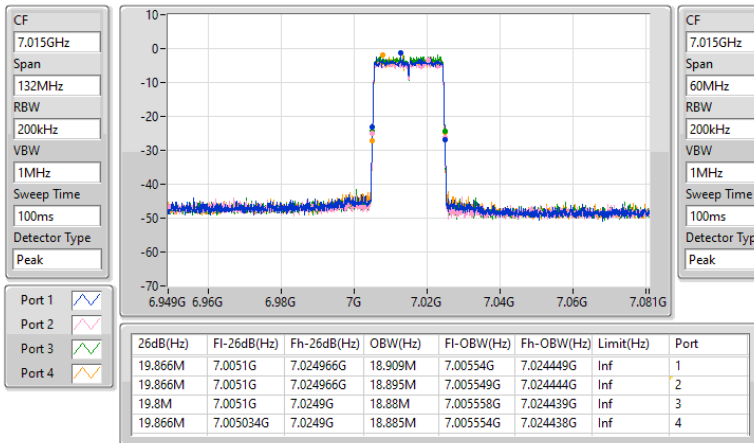

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

7095MHz

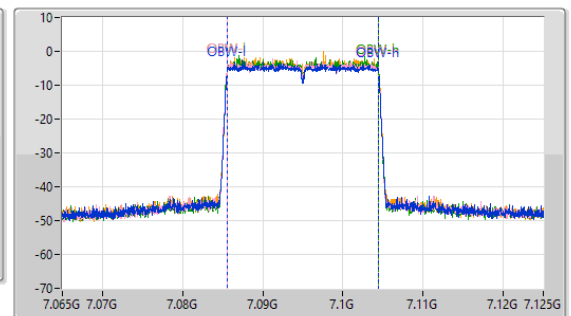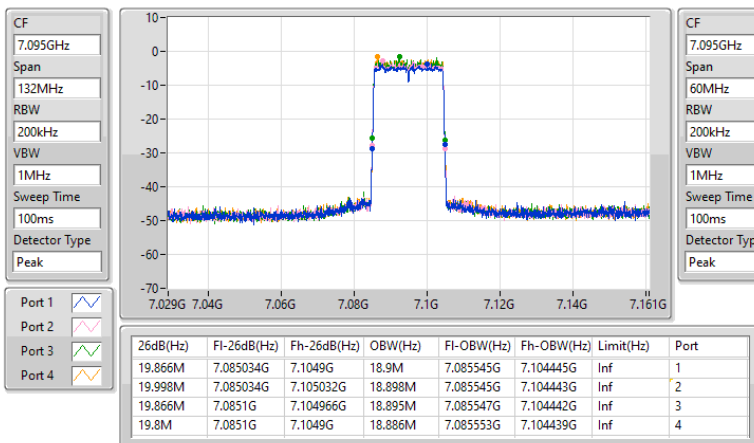




5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


5965MHz

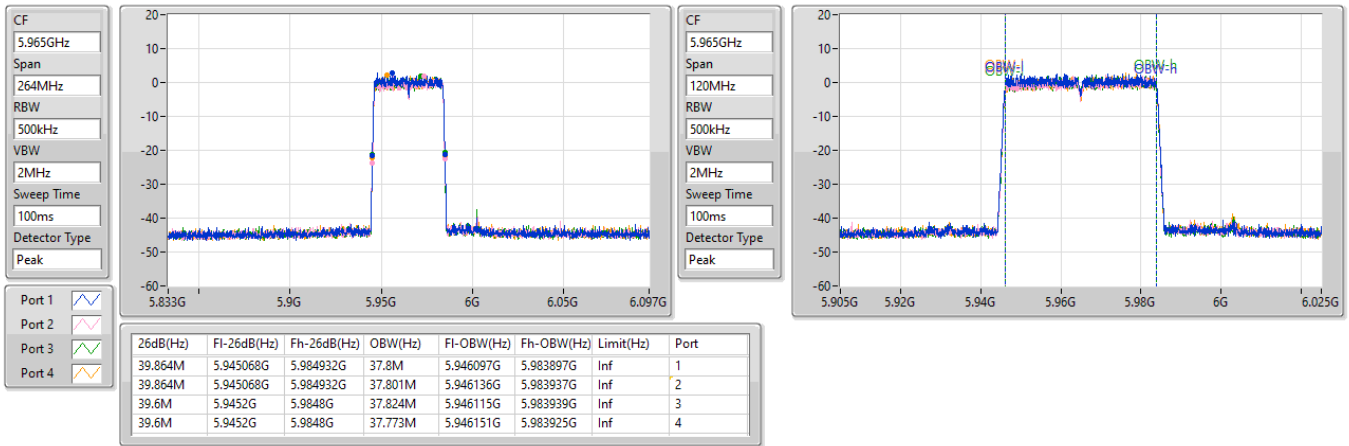

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6165MHz


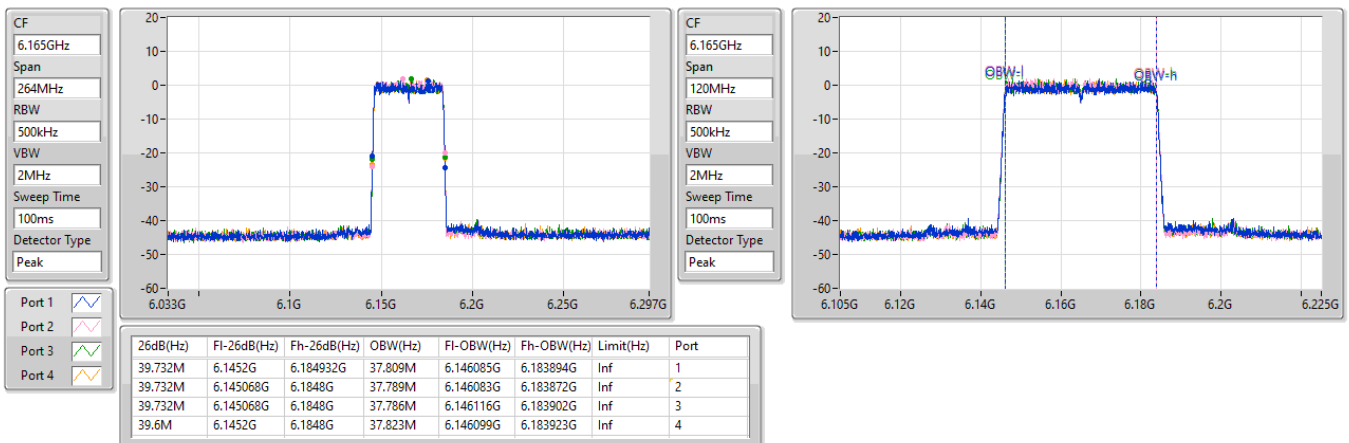




5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



6405MHz

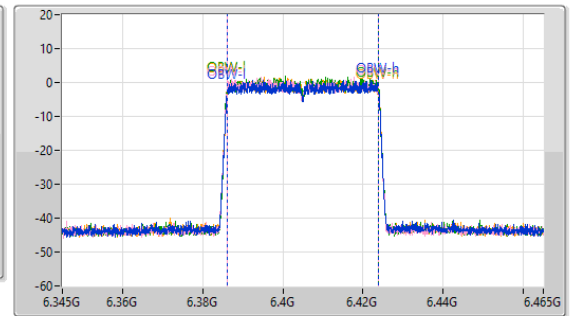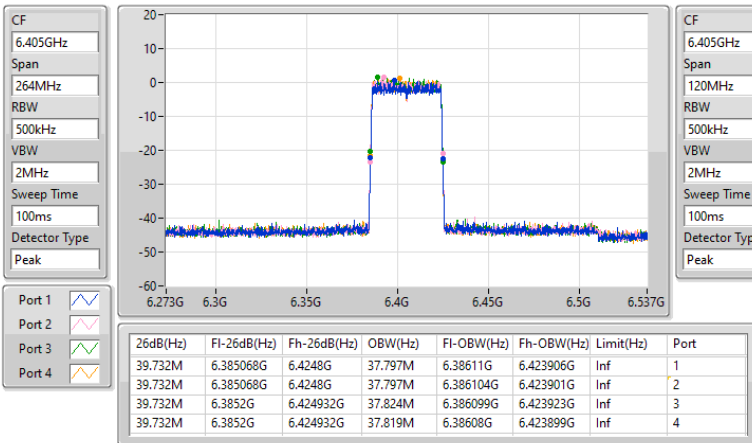

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6445MHz

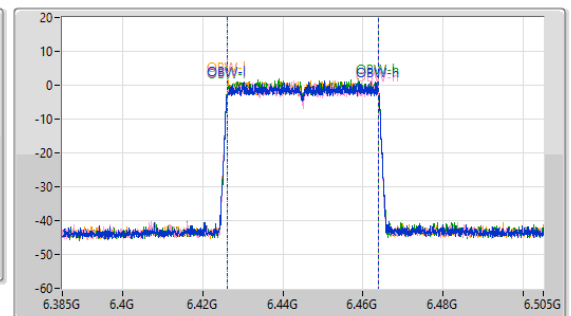
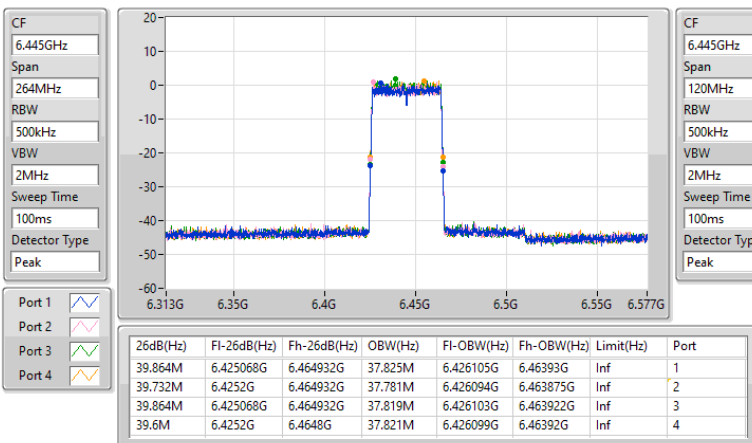




6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



6485MHz

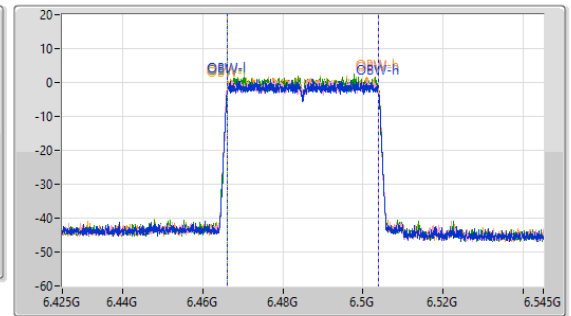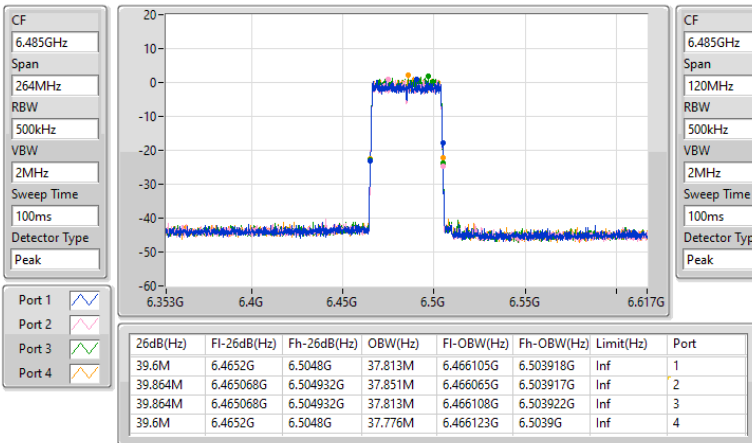

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6525MHz Straddle 6.425-6.525GHz

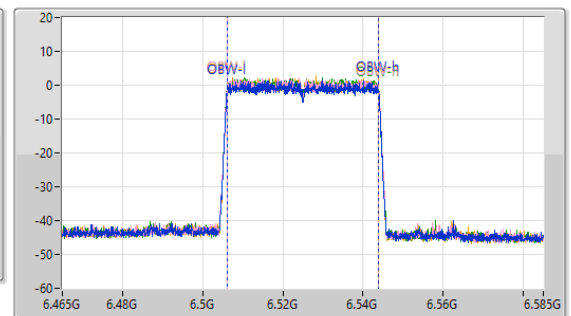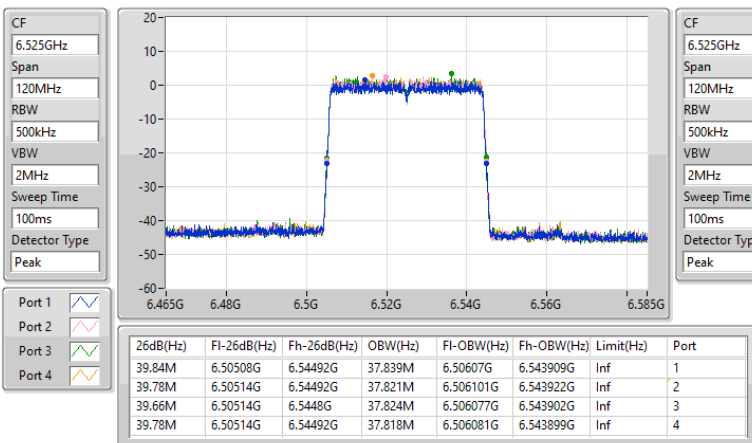




6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


6565MHz

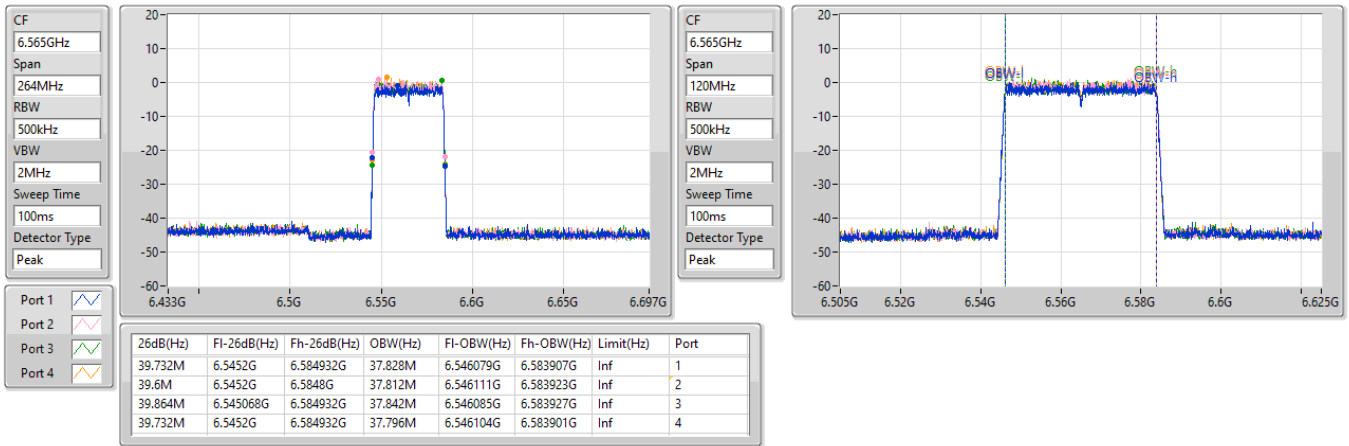

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6725MHz


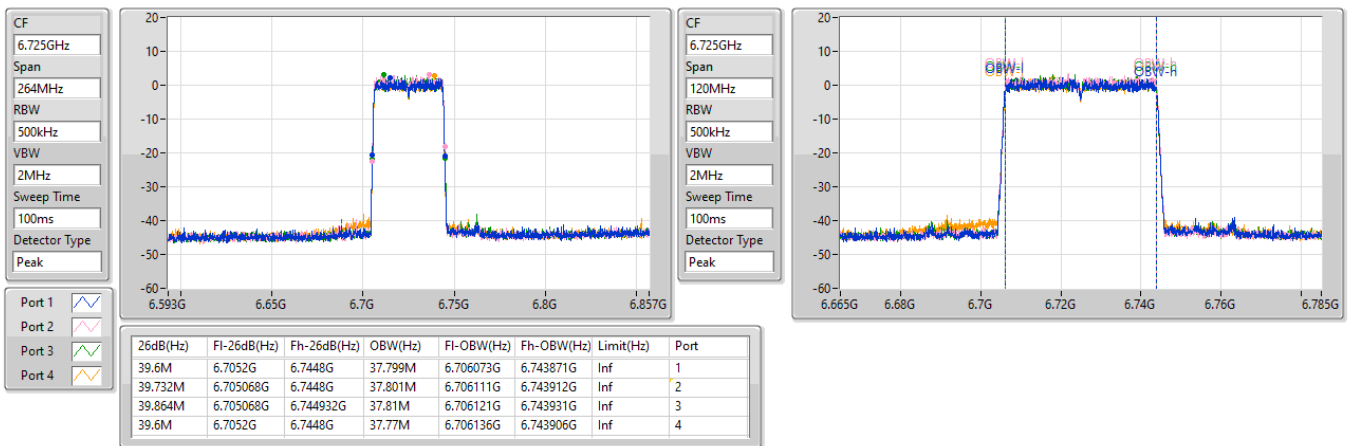




6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



6845MHz

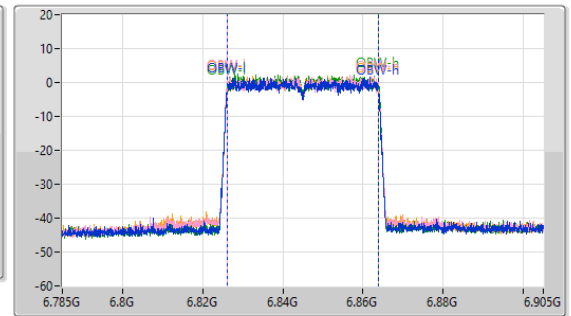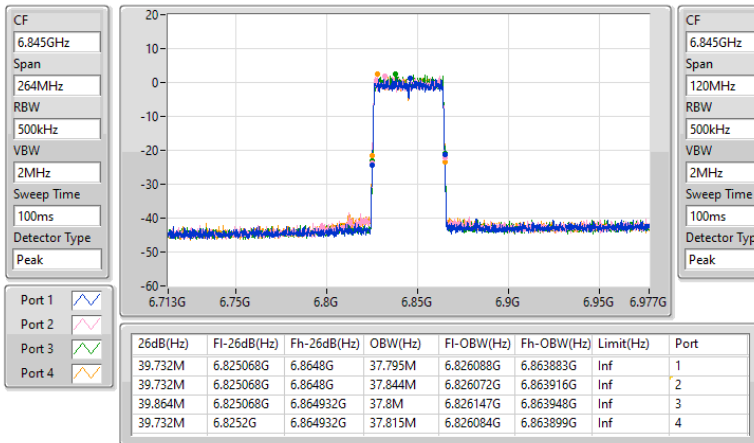

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6885MHz Straddle 6.525-6.875GHz

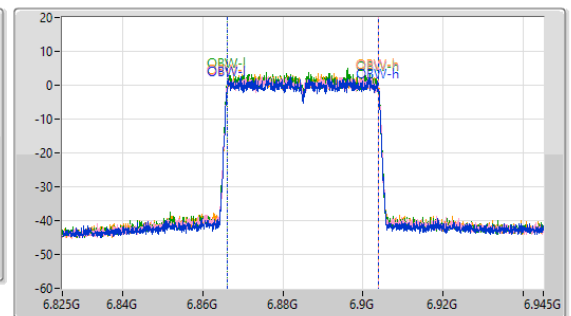
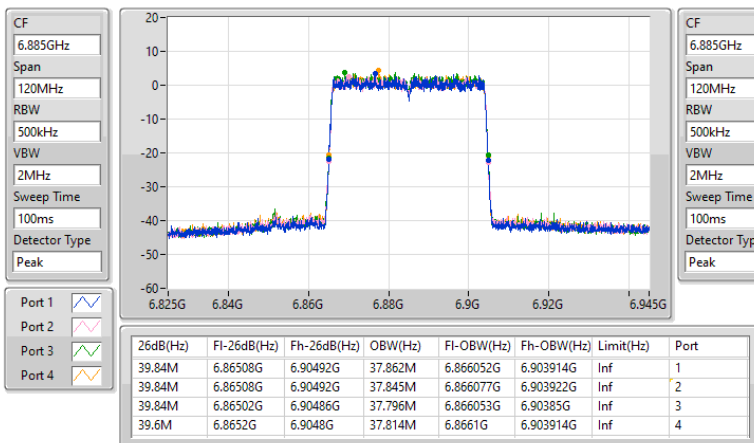




6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



6925MHz

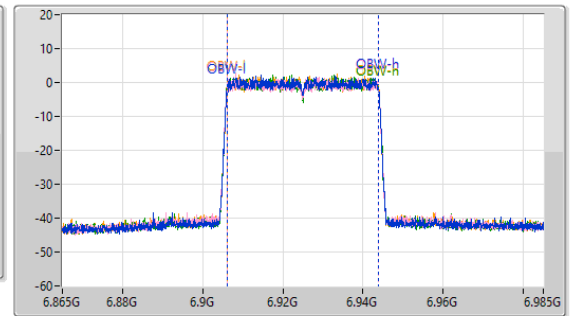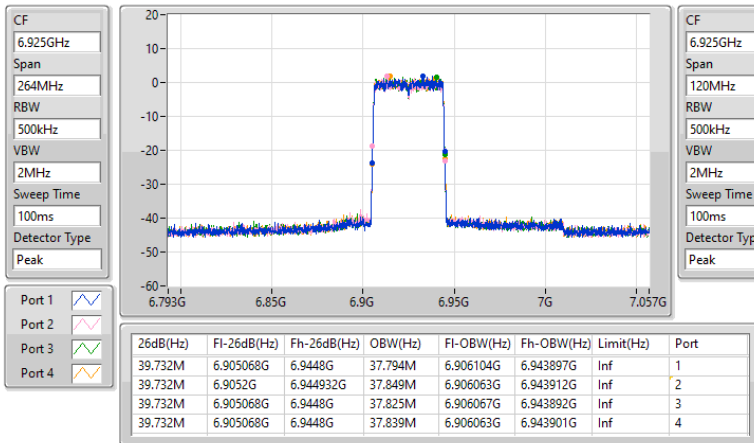

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

7005MHz

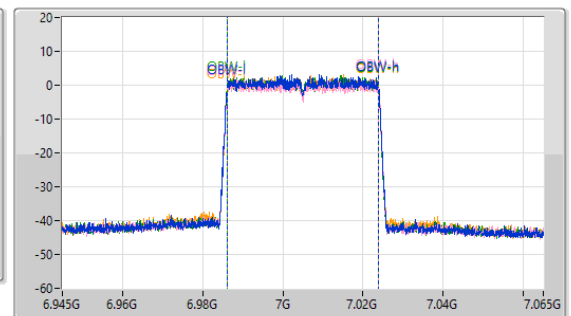
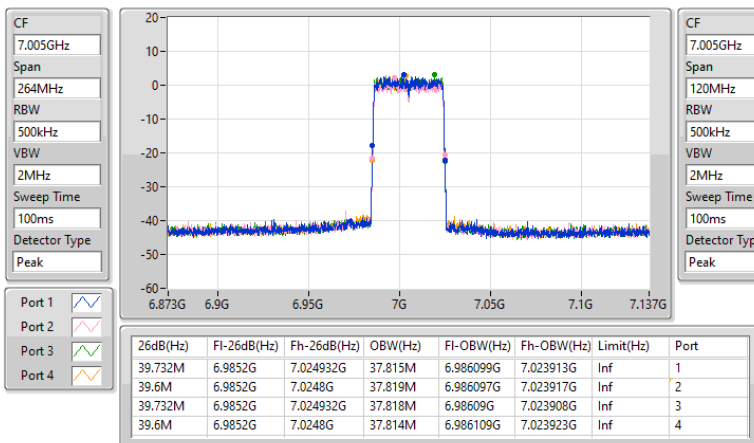




6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



7085MHz

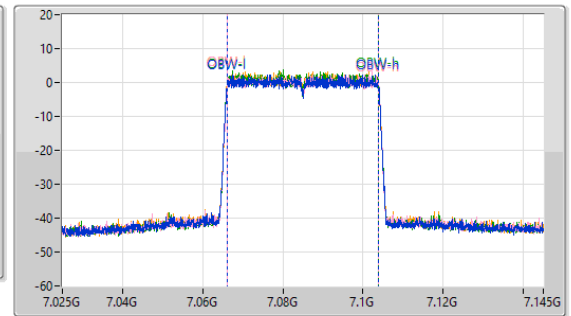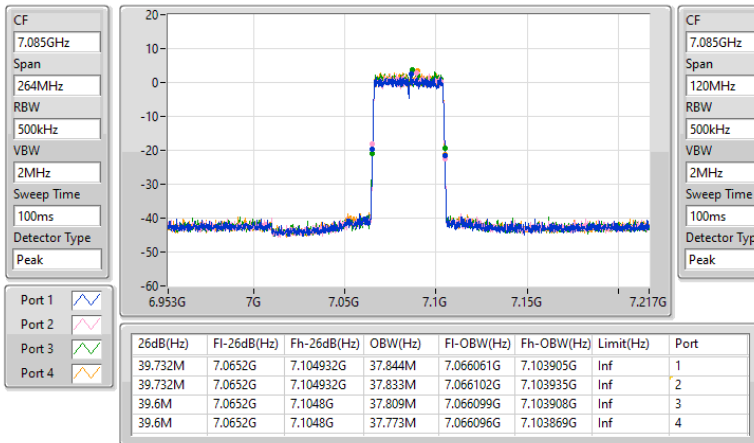

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5985MHz

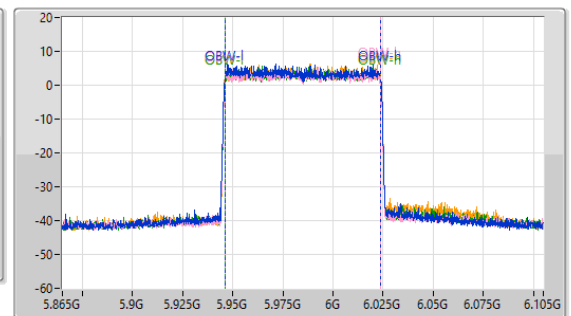
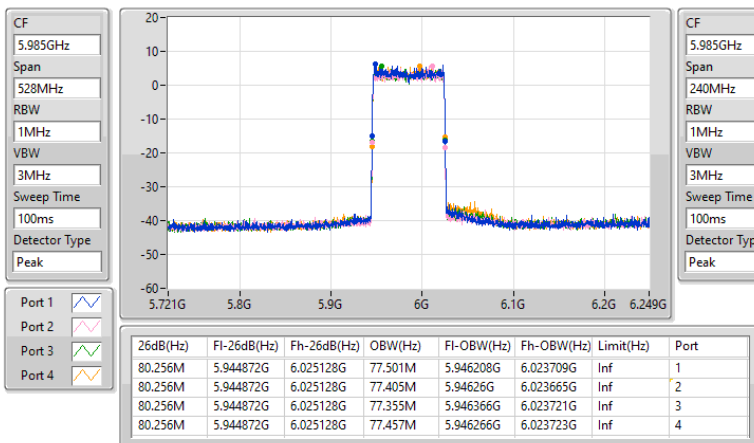




5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW



6145MHz

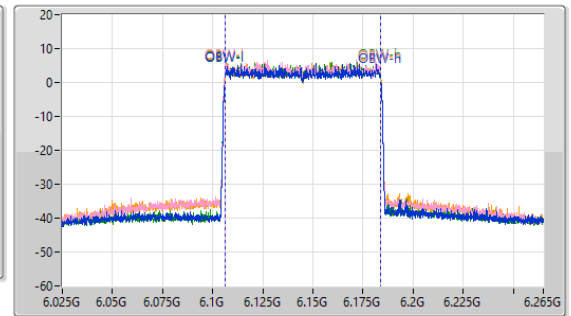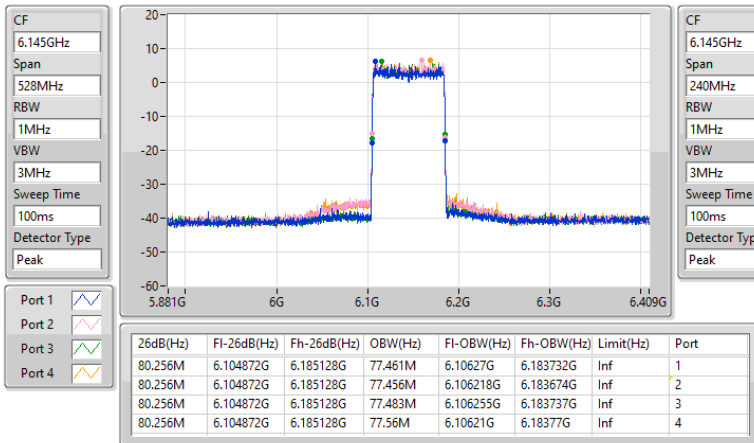

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6385MHz

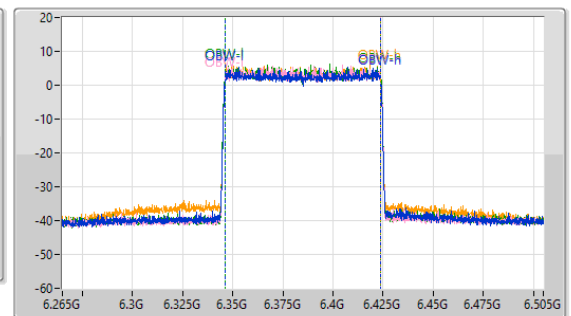
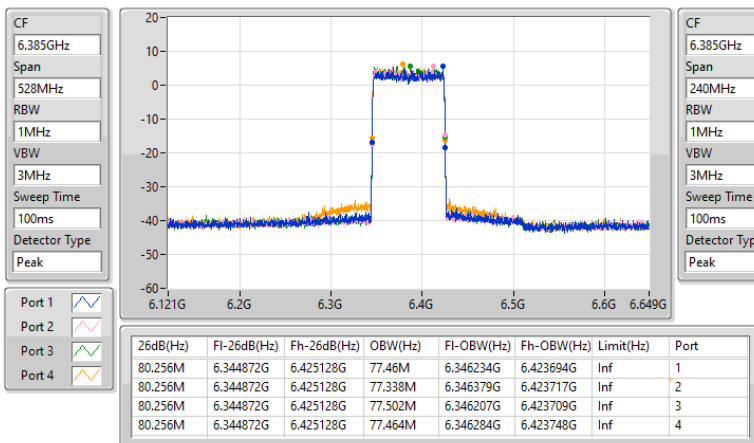




6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW



6465MHz

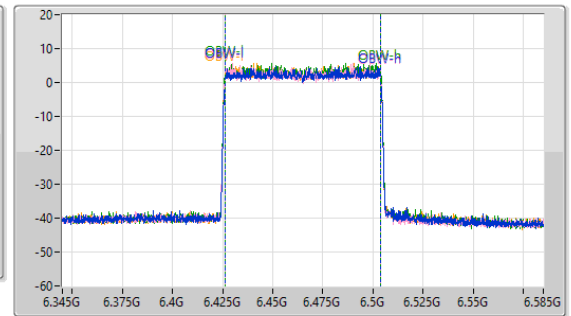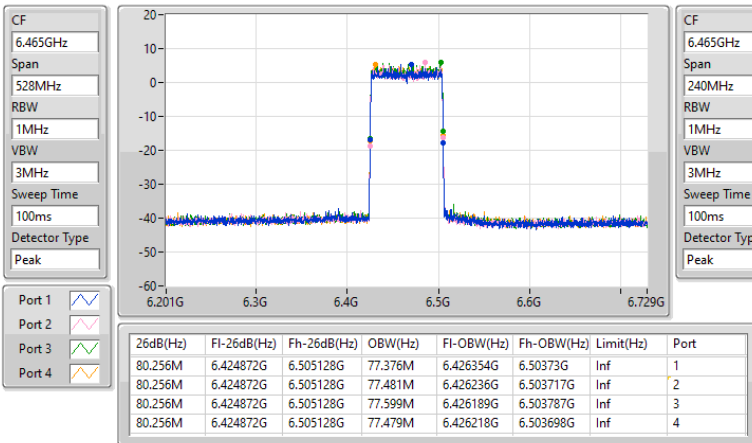

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6545MHz Straddle 6.425-6.525GHz

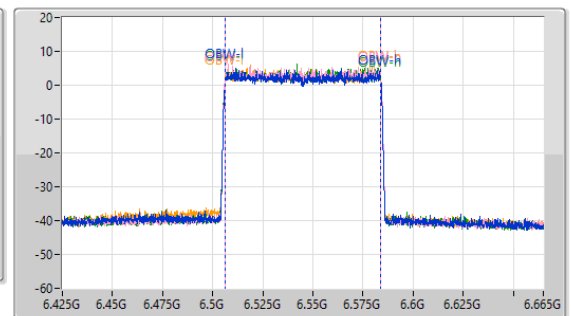
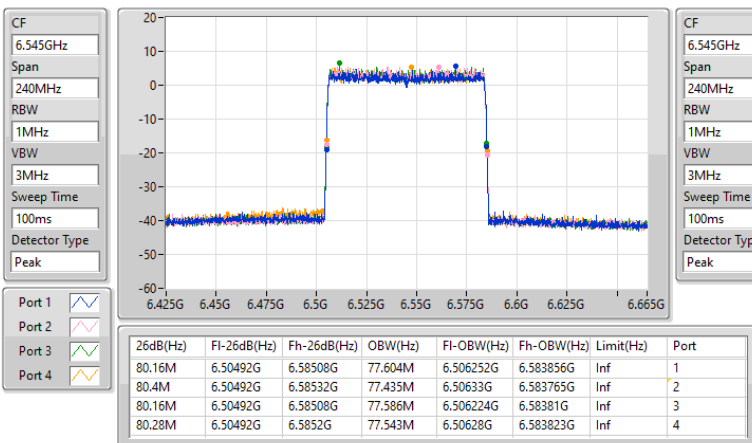




6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW



6625MHz

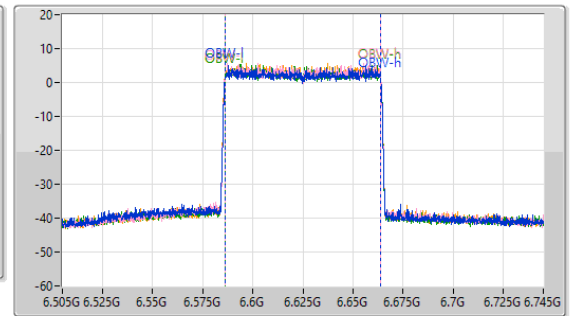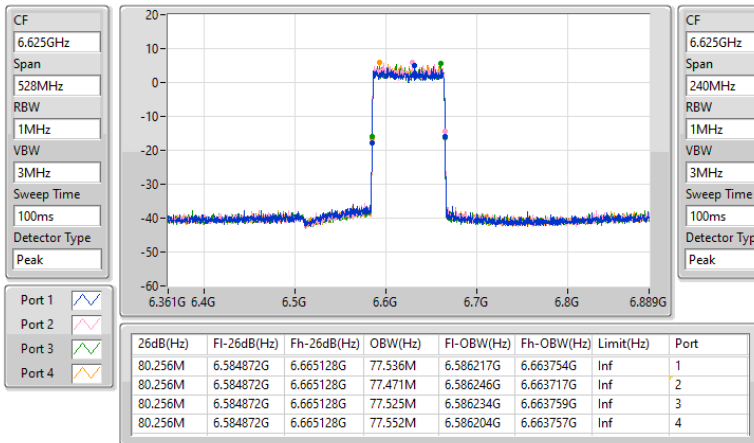

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6705MHz

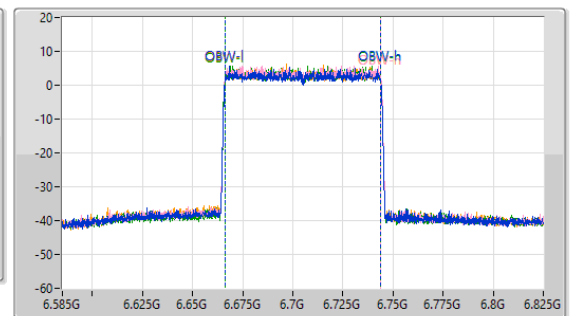
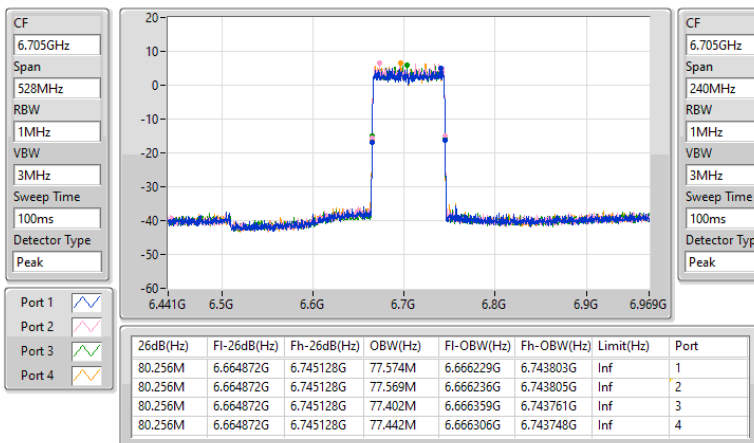




6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW



6785MHz

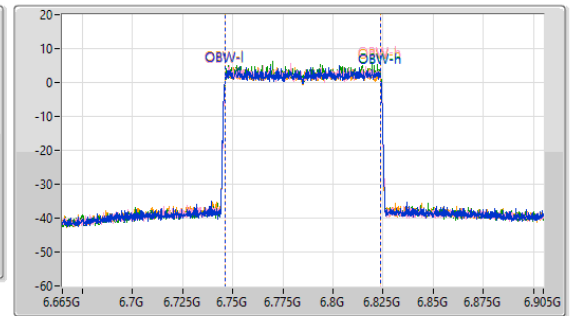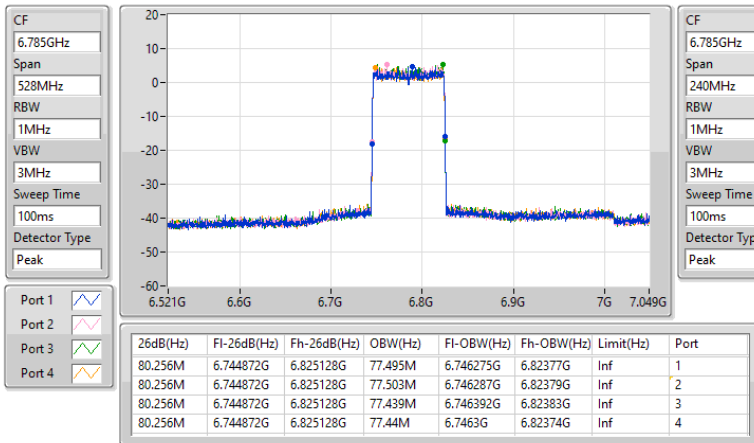

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6865MHz Straddle 6.525-6.875GHz

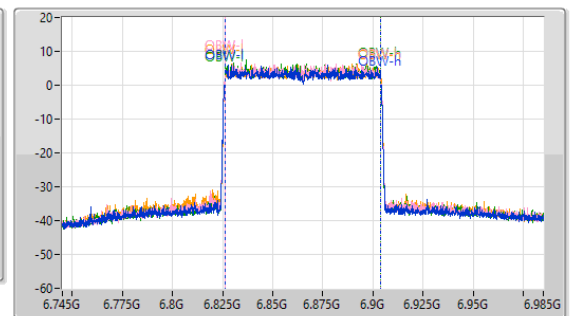
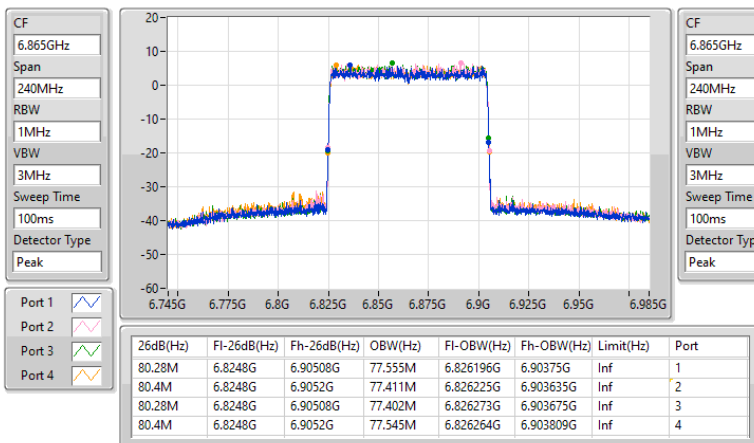




6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW



6945MHz

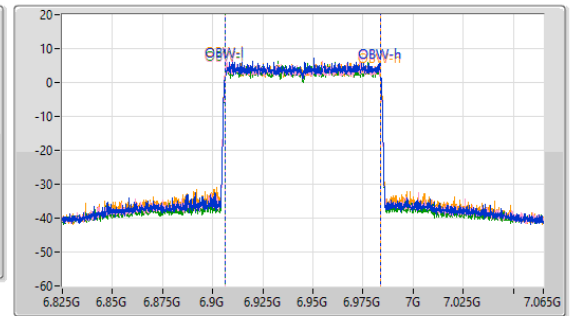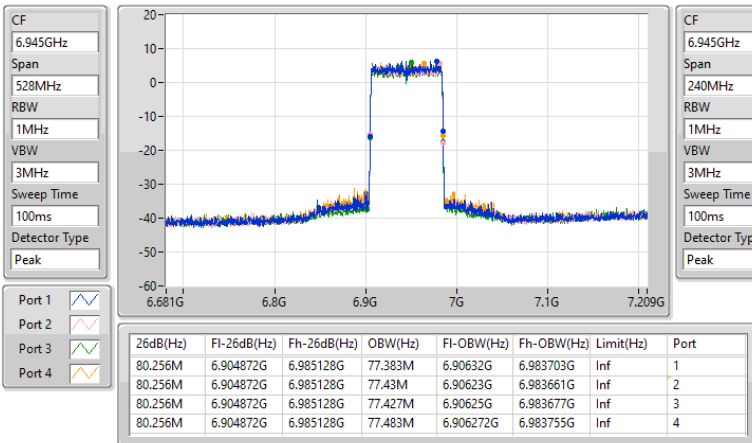

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

7025MHz

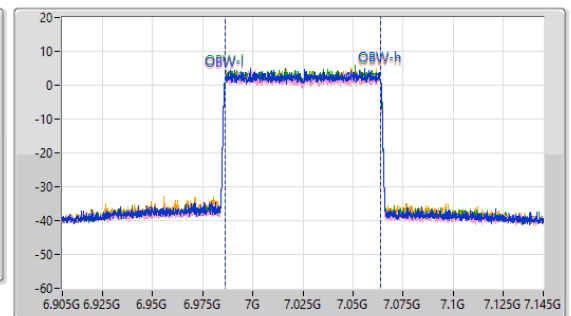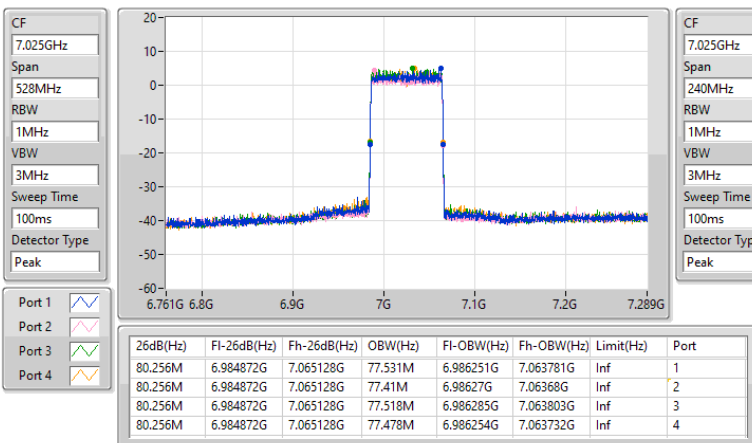




5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW


6025MHz

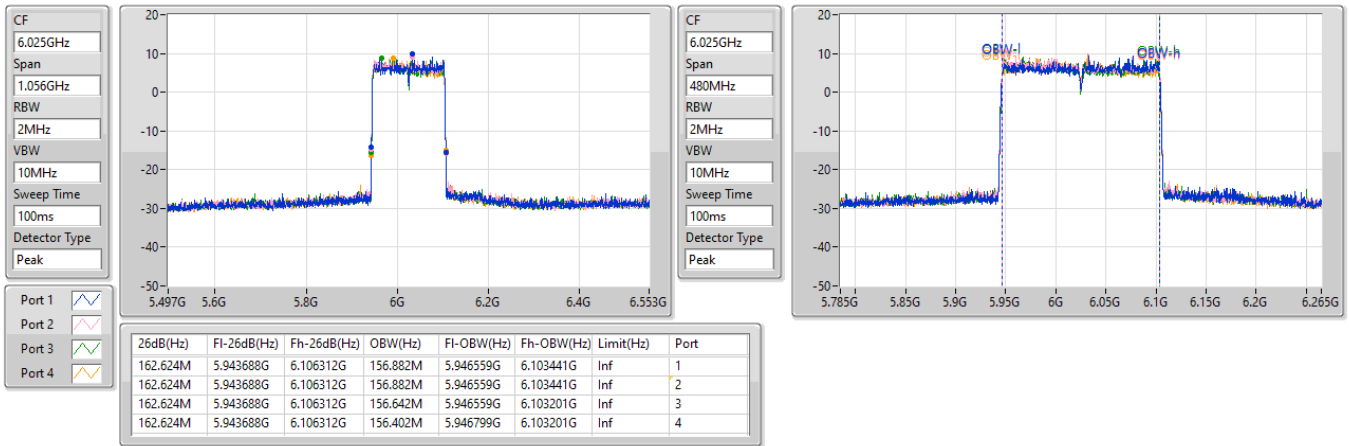

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6185MHz

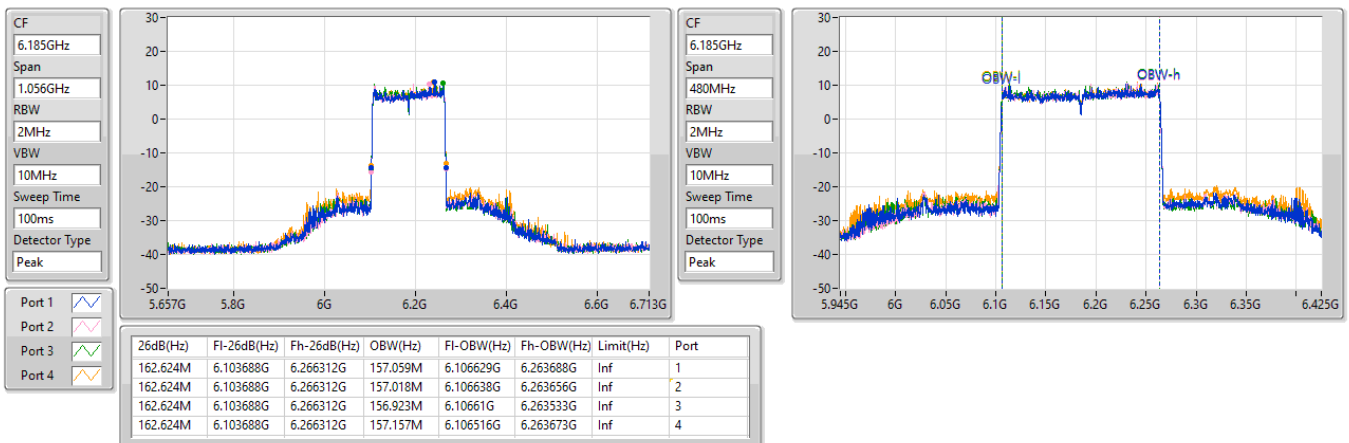




5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW


6345MHz

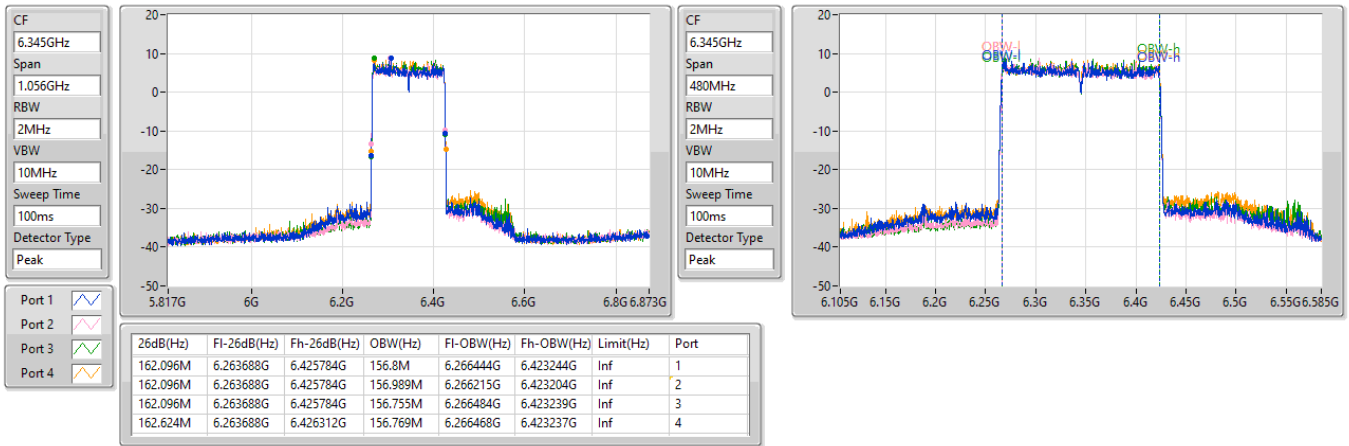

6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6505MHz Straddle 6.425-6.525GHz


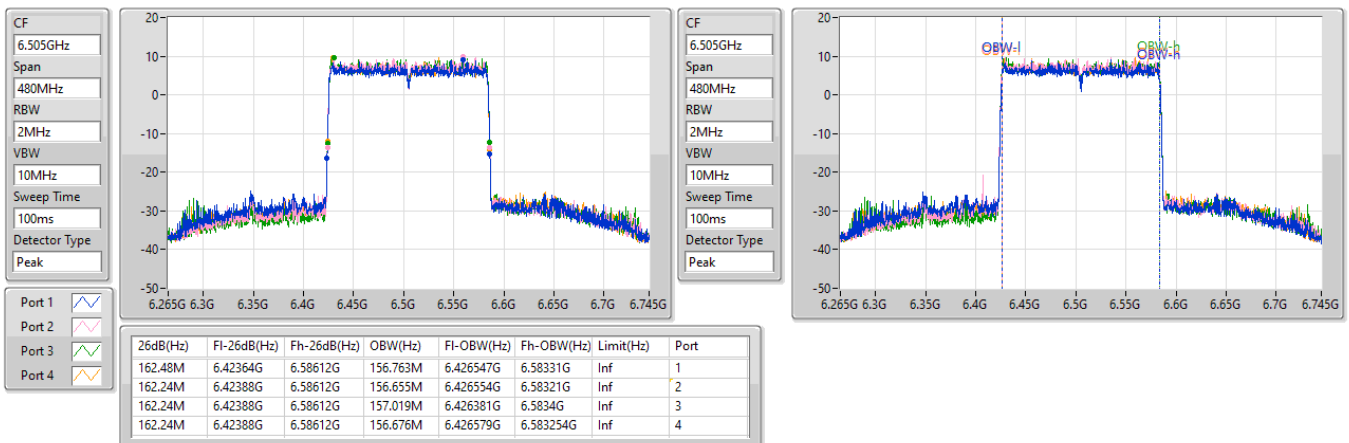




6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW



6665MHz

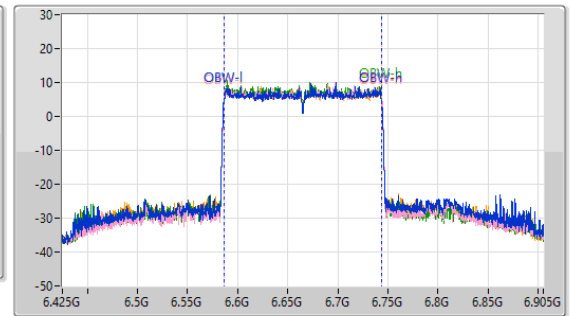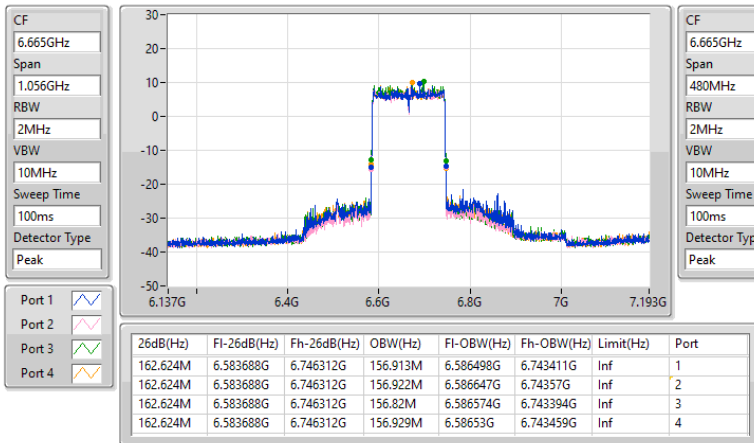

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6825MHz Straddle 6.525-6.875GHz

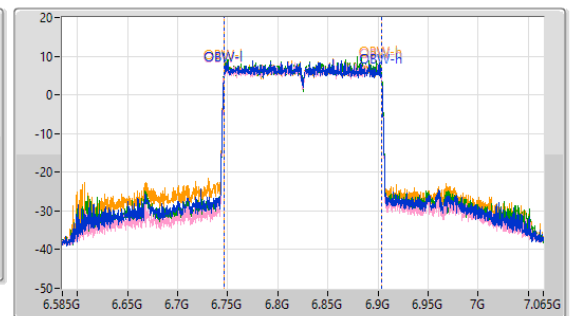
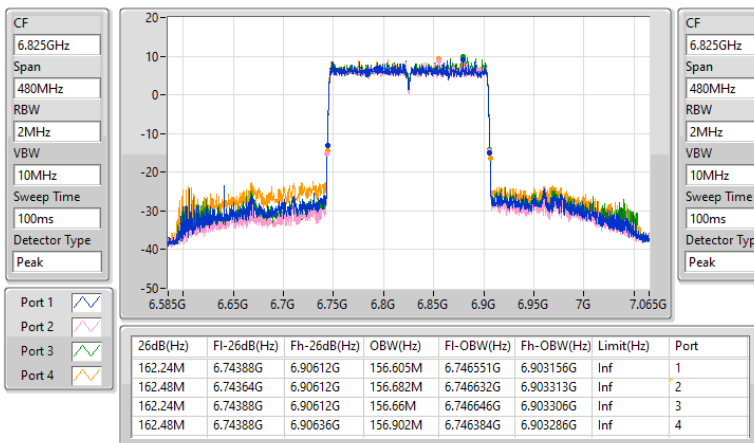




6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW



6985MHz

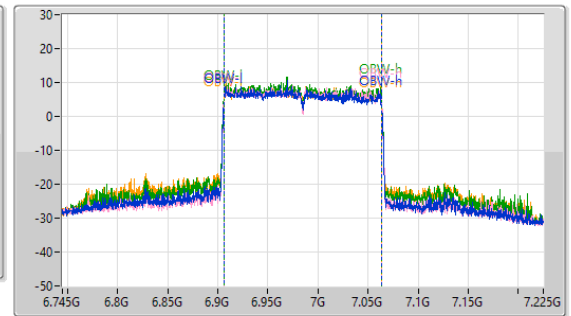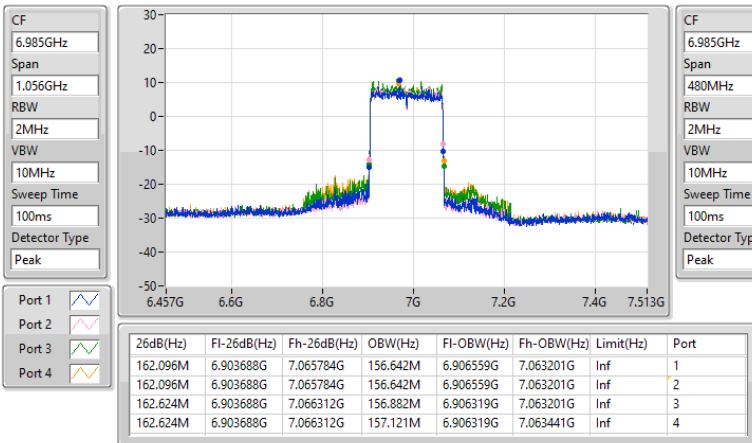

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW

6105MHz

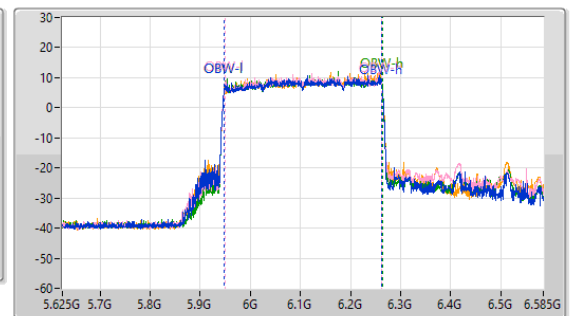
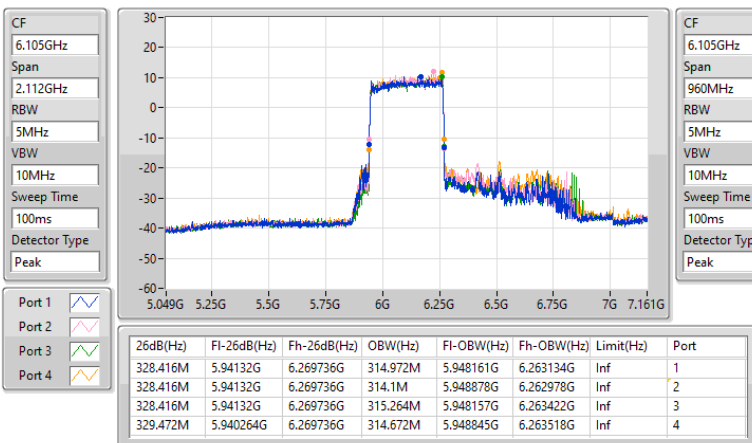




5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW



6265MHz

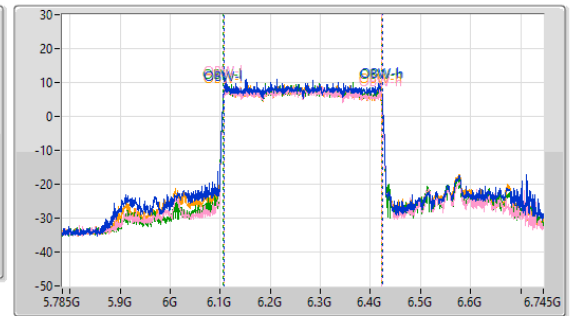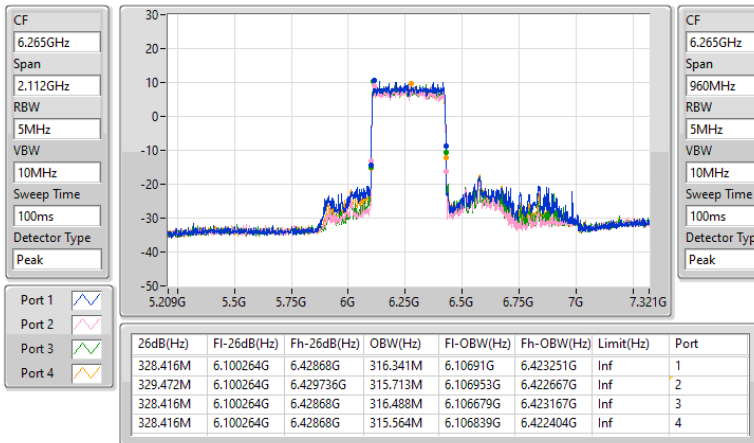

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW


6425MHz Straddle 5.925-6.425GHz

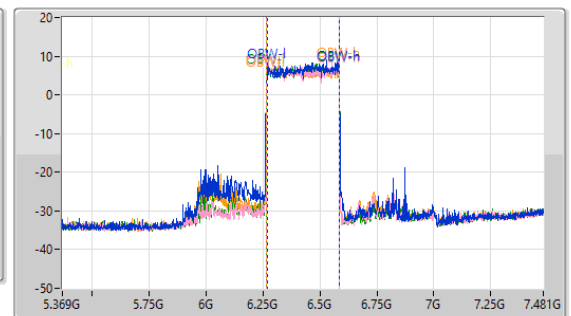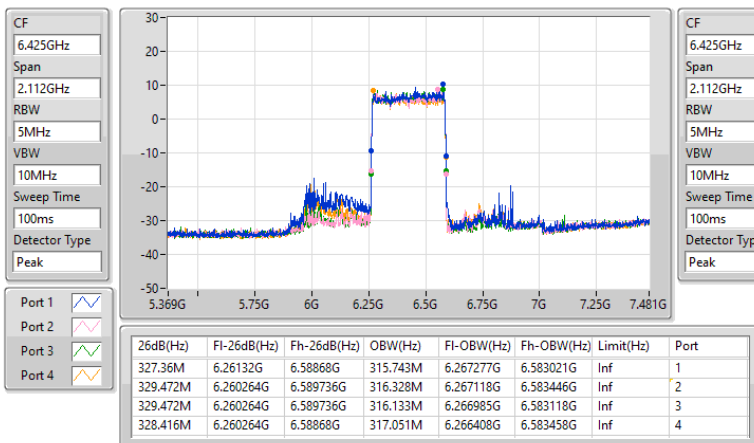

6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW


6585MHz Straddle 6.425-6.525GHz

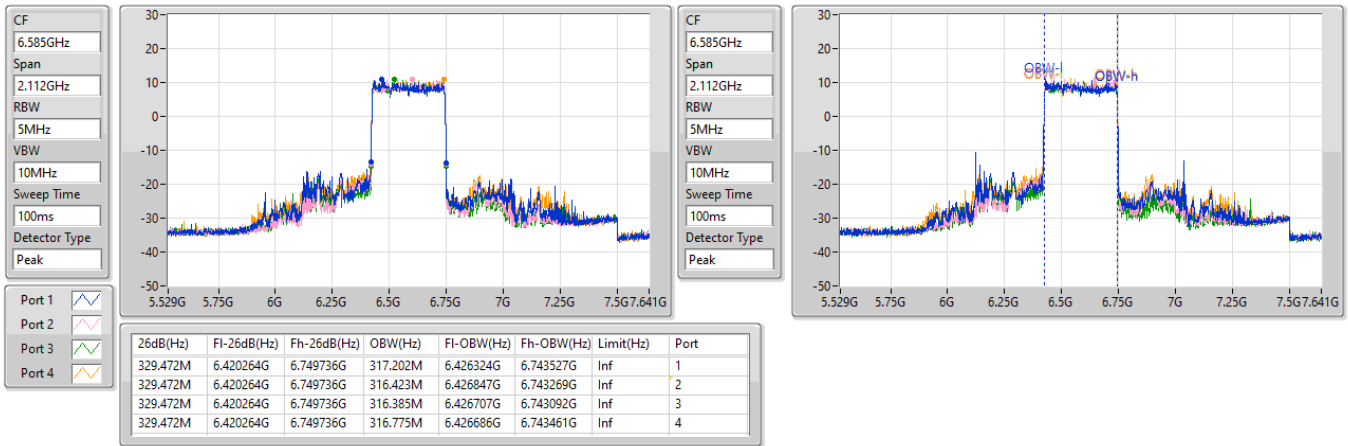

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW

6745MHz Straddle 6.525-6.875GHz

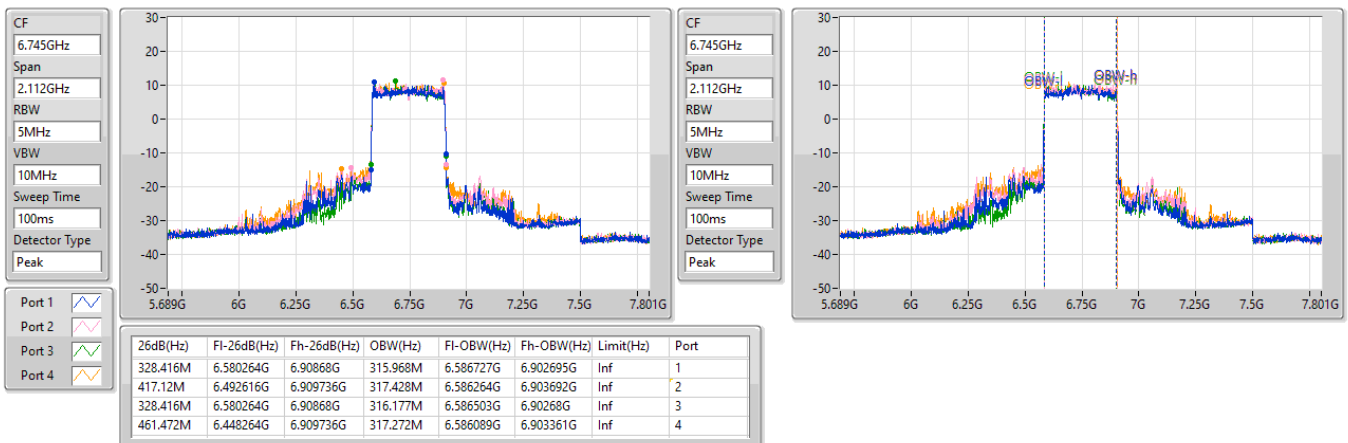




6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW

6905MHz Straddle 6.525-6.875GHz

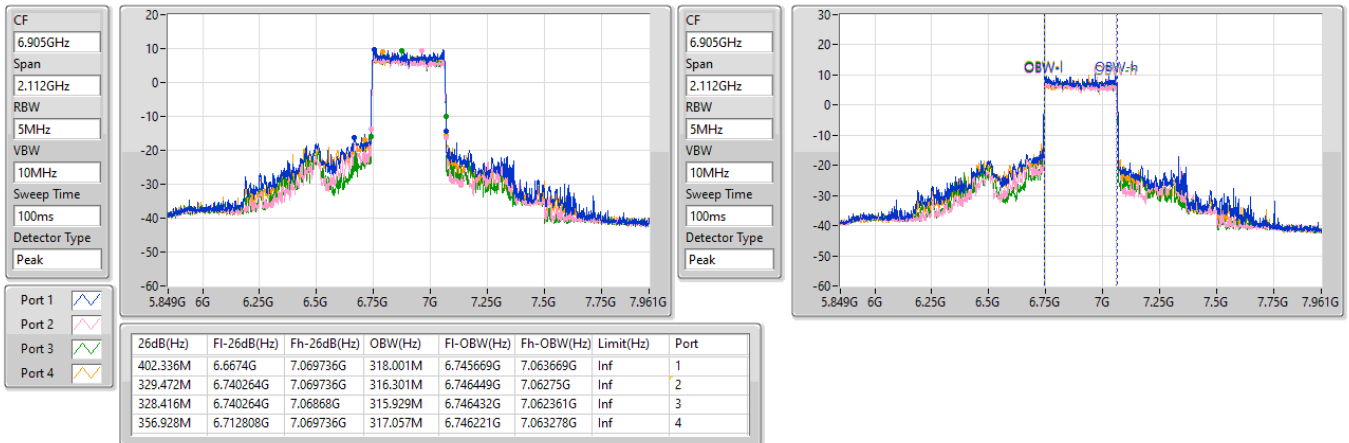



Mode	Freq MHz	CH	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP (dBm)	Limit (dBm)	Verdict
11a	5955	1	105.88	1.18	0.07	107.13	11.93	30.00	Pass
11a	6175	45	105.72	1.48	0.07	107.27	12.07	30.00	Pass
11a	6415	93	104.64	2.72	0.07	107.43	12.23	30.00	Pass
11a	6435	97	104.14	2.86	0.07	107.07	11.87	30.00	Pass
11a	6475	105	103.16	3	0.07	106.23	11.03	30.00	Pass
11a	6515	113	103.61	3.15	0.07	106.83	11.63	30.00	Pass
11a	6535	117	103.87	3.27	0.07	107.21	12.01	30.00	Pass
11a	6715	153	102.94	3.32	0.07	106.33	11.13	30.00	Pass
11a	6855	181	102.51	3.78	0.07	106.36	11.16	30.00	Pass
11a	6875	185	102.57	3.89	0.07	106.53	11.33	30.00	Pass
11a	6895	189	102.4	4.01	0.07	106.48	11.28	30.00	Pass
11a	7015	213	102	4.84	0.07	106.91	11.71	30.00	Pass
11a	7095	229	101.87	5.07	0.07	107.01	11.81	30.00	Pass

Mode	Freq MHz	CH	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP (dBm)	Limit (dBm)	Verdict
be EHT20	5955	1	106.4	1.18	0.05	107.63	12.43	30.00	Pass
be EHT20	6175	45	107.17	1.48	0.05	108.7	13.50	30.00	Pass
be EHT20	6415	93	106.59	2.72	0.05	109.36	14.16	30.00	Pass
be EHT20	6435	97	106.04	2.86	0.05	108.95	13.75	30.00	Pass
be EHT20	6475	105	105.58	3	0.05	108.63	13.43	30.00	Pass
be EHT20	6515	113	105.35	3.15	0.05	108.55	13.35	30.00	Pass
be EHT20	6535	117	105.11	3.27	0.05	108.43	13.23	30.00	Pass
be EHT20	6715	153	105.26	3.32	0.05	108.63	13.43	30.00	Pass
be EHT20	6855	181	103.78	3.78	0.05	107.61	12.41	30.00	Pass
be EHT20	6875	185	104.24	3.89	0.05	108.18	12.98	30.00	Pass
be EHT20	6895	189	104.42	4.01	0.05	108.48	13.28	30.00	Pass
be EHT20	7015	213	103.94	4.84	0.05	108.83	13.63	30.00	Pass
be EHT20	7095	229	103.49	5.07	0.05	108.61	13.41	30.00	Pass

Note:

$EIRP(dBm) = \text{Final Level}(dBuV/m) - 95.2$

$\text{Final Level}(dBuV/m) = \text{Read Level}(dBuV) + \text{Path Loss}(dB/m) + \text{DT Factor}(dB)$

$\text{Path Loss} = \text{Antenna Factor}(dBuV/m) + \text{Cable Loss}(dB) - \text{Preamp Factor}(dB)$



Mode	Freq MHz	CH	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP (dBm)	Limit (dBm)	Verdict
be EHT40	5965	3	110.39	1.18	0.09	111.66	16.46	30.00	Pass
be EHT40	6165	43	110.36	1.43	0.09	111.88	16.68	30.00	Pass
be EHT40	6405	91	108.98	2.66	0.09	111.73	16.53	30.00	Pass
be EHT40	6445	99	109.35	2.92	0.09	112.36	17.16	30.00	Pass
be EHT40	6485	107	108.91	3.04	0.09	112.04	16.84	30.00	Pass
be EHT40	6525	115	108.74	3.21	0.09	112.04	16.84	30.00	Pass
be EHT40	6565	123	107.02	3.38	0.09	110.49	15.29	30.00	Pass
be EHT40	6725	155	108.61	3.32	0.09	112.02	16.82	30.00	Pass
be EHT40	6845	179	107.99	3.72	0.09	111.8	16.60	30.00	Pass
be EHT40	6885	187	107.92	3.96	0.09	111.97	16.77	30.00	Pass
be EHT40	6925	195	106.24	4.23	0.09	110.56	15.36	30.00	Pass
be EHT40	7005	211	106.61	4.82	0.09	111.52	16.32	30.00	Pass
be EHT40	7085	227	106.02	5.03	0.09	111.14	15.94	30.00	Pass

Mode	Freq MHz	CH	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP (dBm)	Limit (dBm)	Verdict
be EHT80	5985	7	112.9	1.19	0.2	114.29	19.09	30.00	Pass
be EHT80	6145	39	113.37	1.35	0.2	114.92	19.72	30.00	Pass
be EHT80	6385	87	112.87	2.52	0.2	115.59	20.39	30.00	Pass
be EHT80	6465	103	112.02	2.98	0.2	115.2	20.00	30.00	Pass
be EHT80	6545	119	112.03	3.33	0.2	115.56	20.36	30.00	Pass
be EHT80	6625	135	111.93	3.41	0.2	115.54	20.34	30.00	Pass
be EHT80	6705	151	111.81	3.31	0.2	115.32	20.12	30.00	Pass
be EHT80	6785	167	111.92	3.42	0.2	115.54	20.34	30.00	Pass
be EHT80	6865	183	111.47	3.83	0.2	115.5	20.30	30.00	Pass
be EHT80	6945	199	110.76	4.39	0.2	115.35	20.15	30.00	Pass
be EHT80	7025	215	109.72	4.86	0.2	114.78	19.58	30.00	Pass

Mode	Freq MHz	CH	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP (dBm)	Limit (dBm)	Verdict
be EHT160	6025	15	115.58	1.26	0.31	117.15	21.95	30.00	Pass
be EHT160	6185	47	116.5	1.53	0.31	118.34	23.14	30.00	Pass
be EHT160	6345	79	115.26	2.24	0.31	117.81	22.61	30.00	Pass
be EHT160	6505	111	114.7	3.1	0.31	118.11	22.91	30.00	Pass
be EHT160	6665	143	113.92	3.35	0.31	117.58	22.38	30.00	Pass
be EHT160	6825	175	113.36	3.61	0.31	117.28	22.08	30.00	Pass
be EHT160	6985	207	112.43	4.7	0.31	117.44	22.24	30.00	Pass

Note:

EIRP(dBm) = Final Level(dBuV/m) - 95.2

Final Level(dBuV/m) = Read Level (dBuV) + Path Loss(dB/m) + DT Factor(dB)

Path Loss = Antenna Factor(dBuV/m) + Cable Loss(dB) - Preamp Factor(dB)




Mode	Freq MHz	CH	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP (dBm)	Limit (dBm)	Verdict
be EHT320	6105	31	114.77	1.25	0.52	116.54	21.34	30.00	Pass
be EHT320	6265	63	113.84	1.9	0.52	116.26	21.06	30.00	Pass
be EHT320	6425	95	113.68	2.79	0.52	116.99	21.79	30.00	Pass
be EHT320	6585	127	113.58	3.42	0.52	117.52	22.32	30.00	Pass
be EHT320	6745	159	113.06	3.33	0.52	116.91	21.71	30.00	Pass
be EHT320	6905	191	110.22	4.08	0.52	114.82	19.62	30.00	Pass


Note:


$EIRP(dBm) = \text{Final Level}(dBuV/m) - 95.2$


$\text{Final Level}(dBuV/m) = \text{Read Level}(dBuV) + \text{Path Loss}(dB/m) + \text{DT Factor}(dB)$


$\text{Path Loss} = \text{Antenna Factor}(dBuV/m) + \text{Cable Loss}(dB) - \text{Preamp Factor}(dB)$

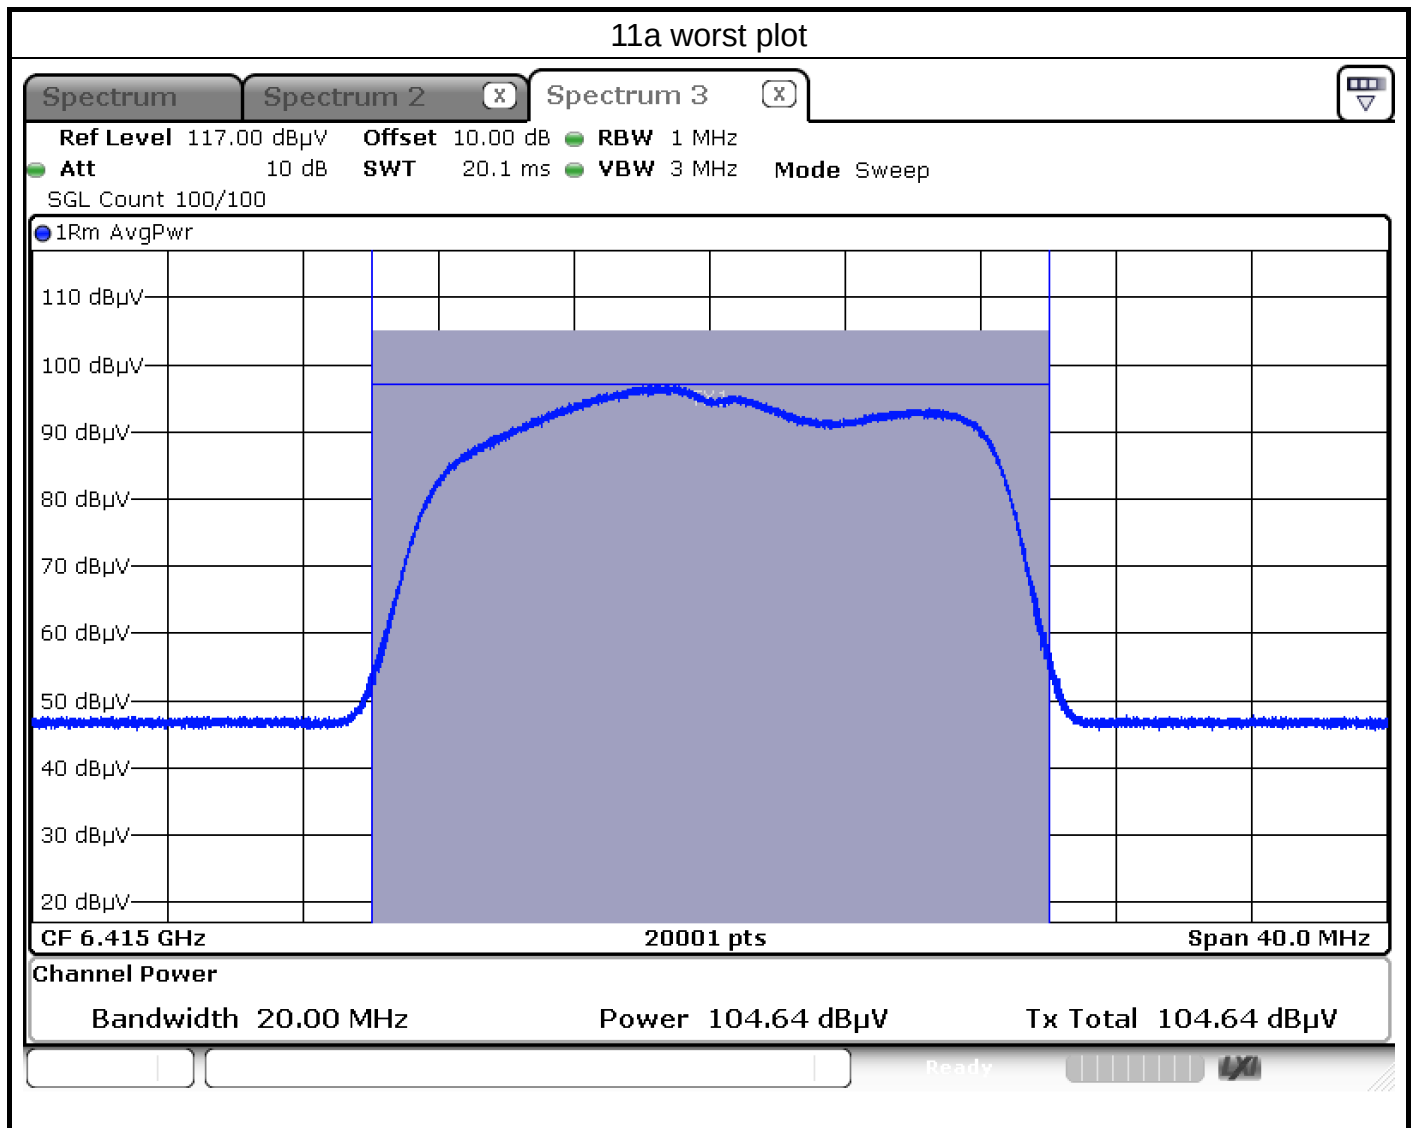


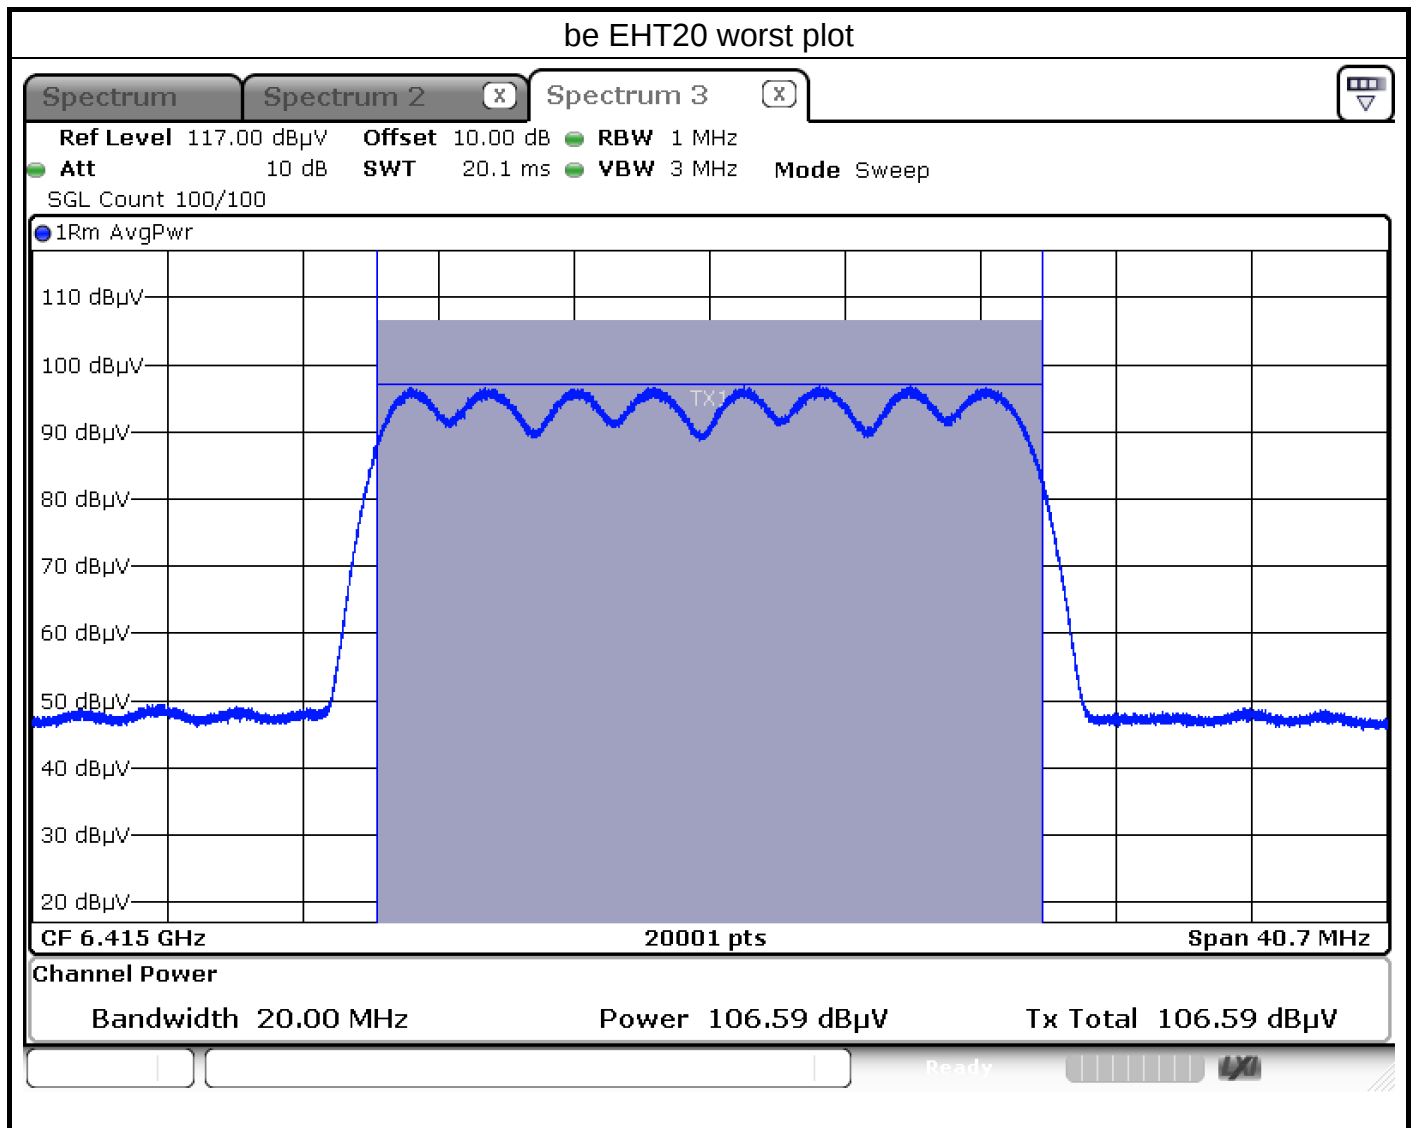

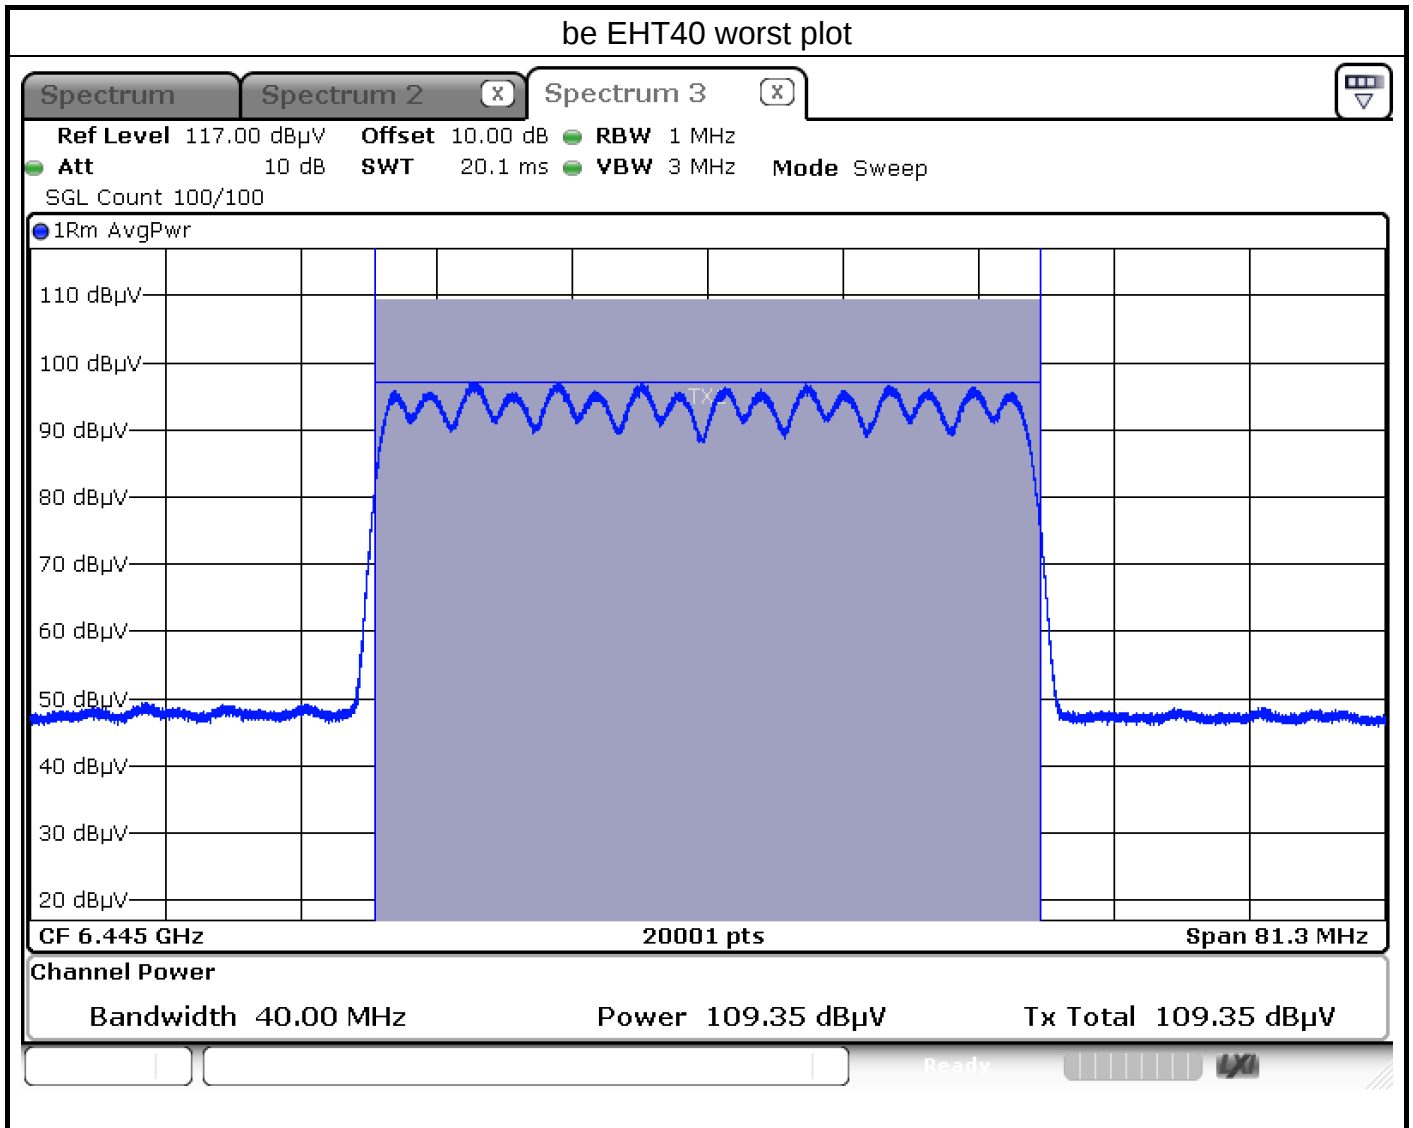

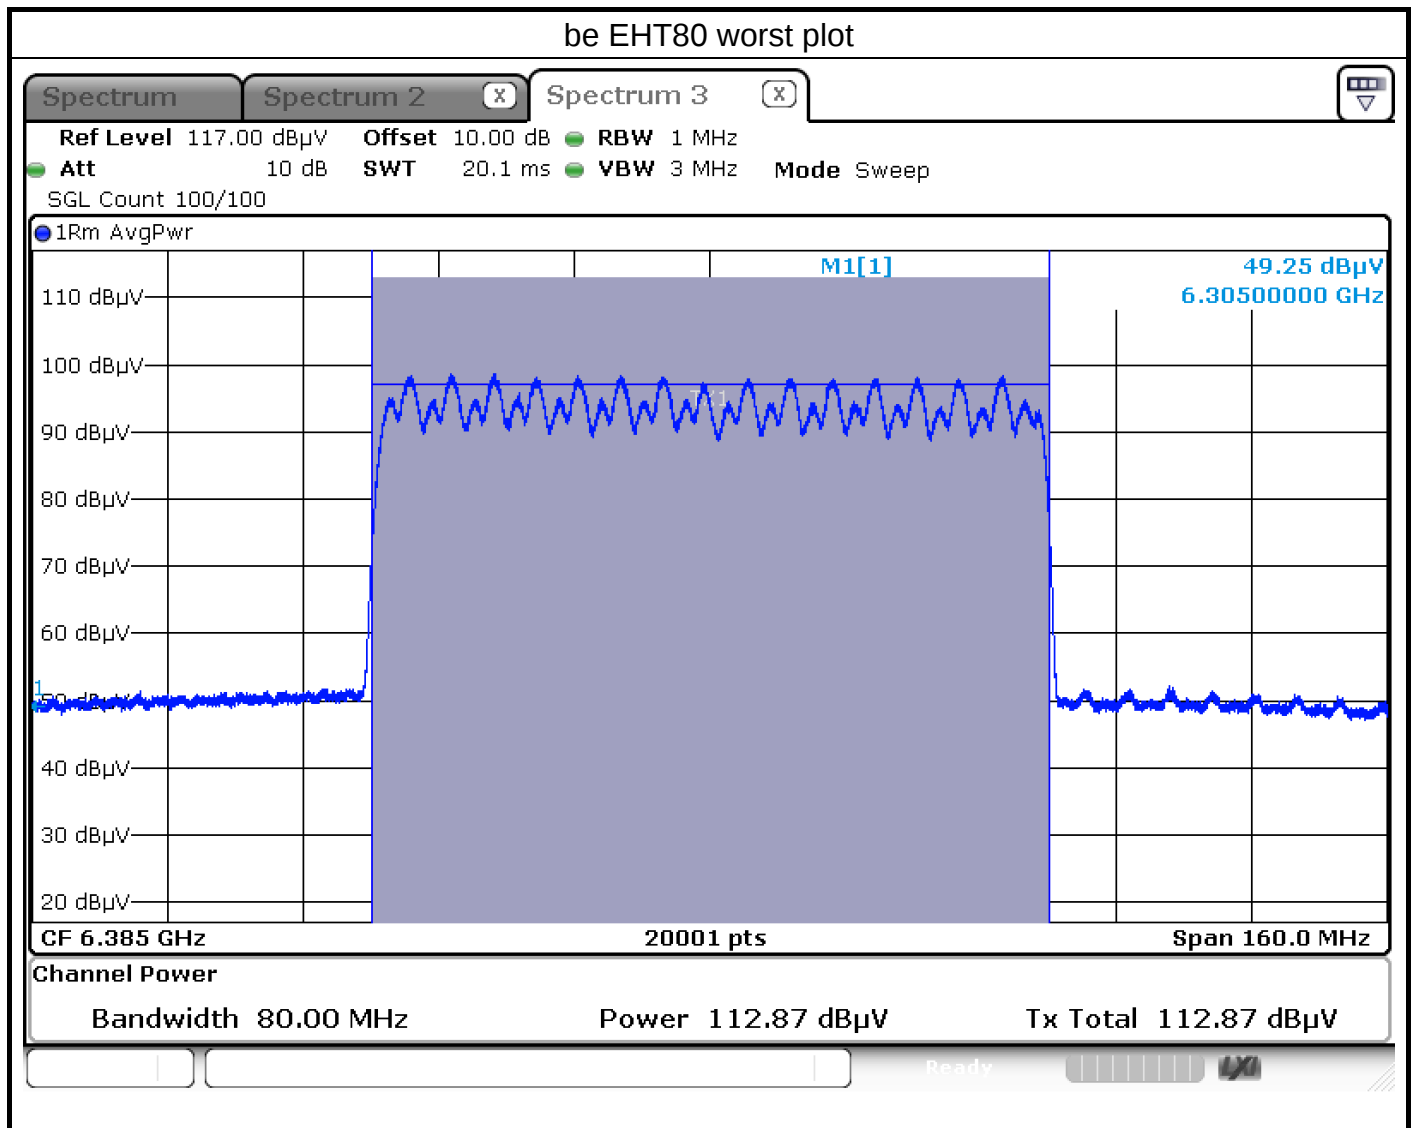

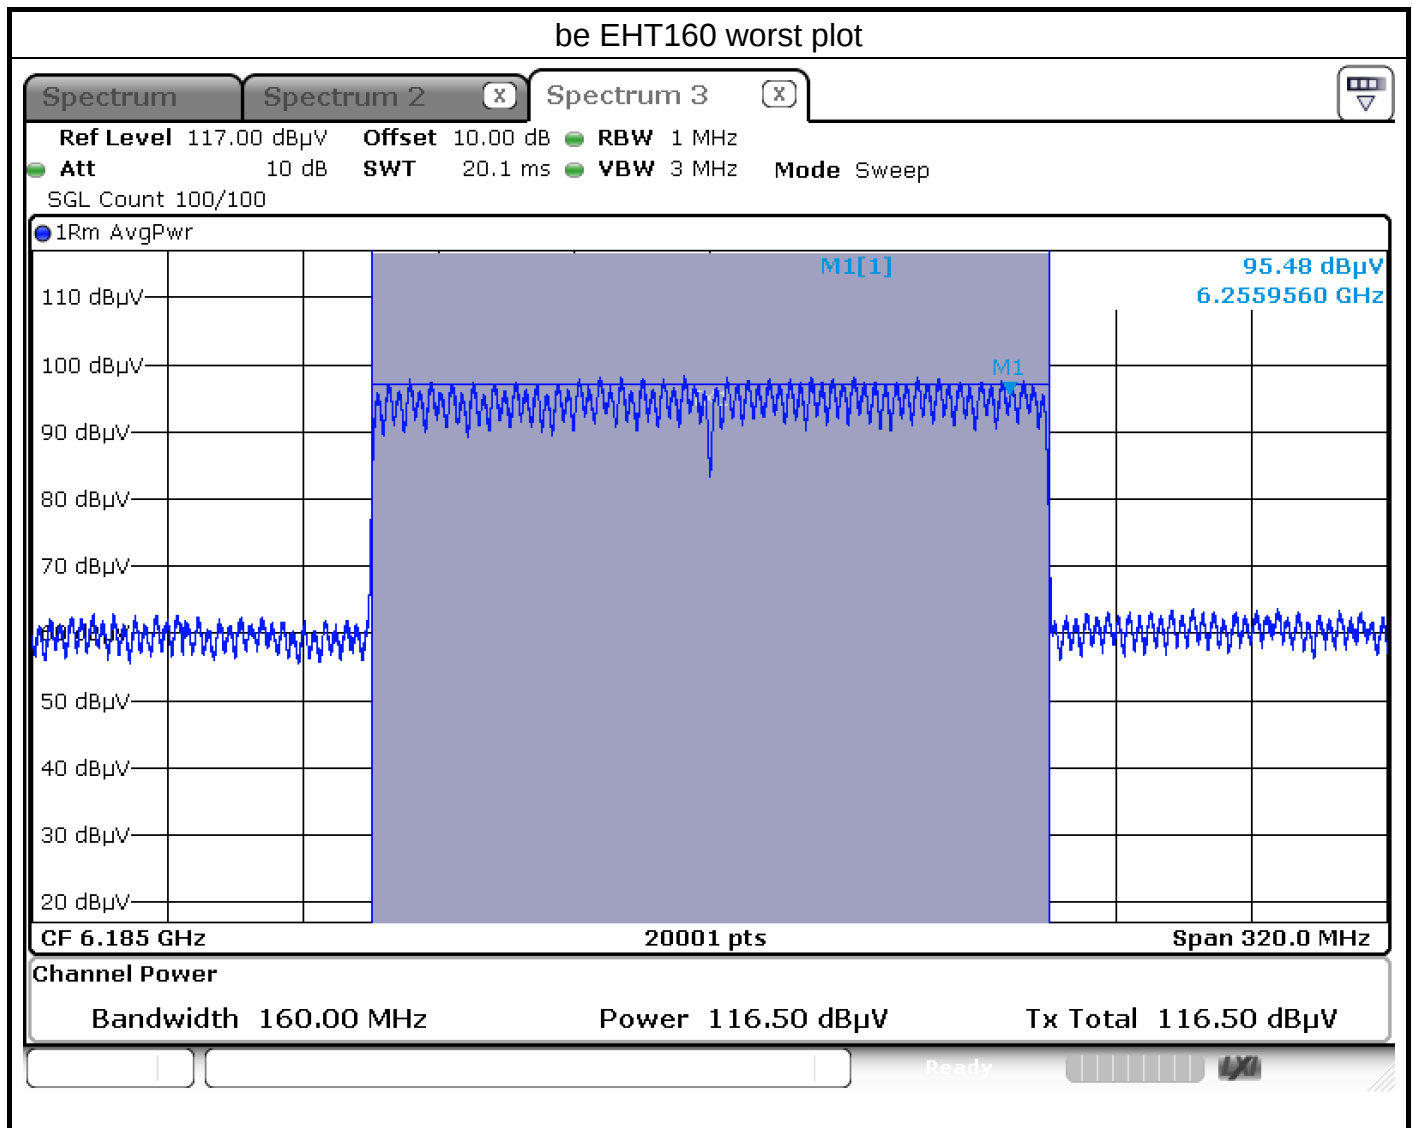

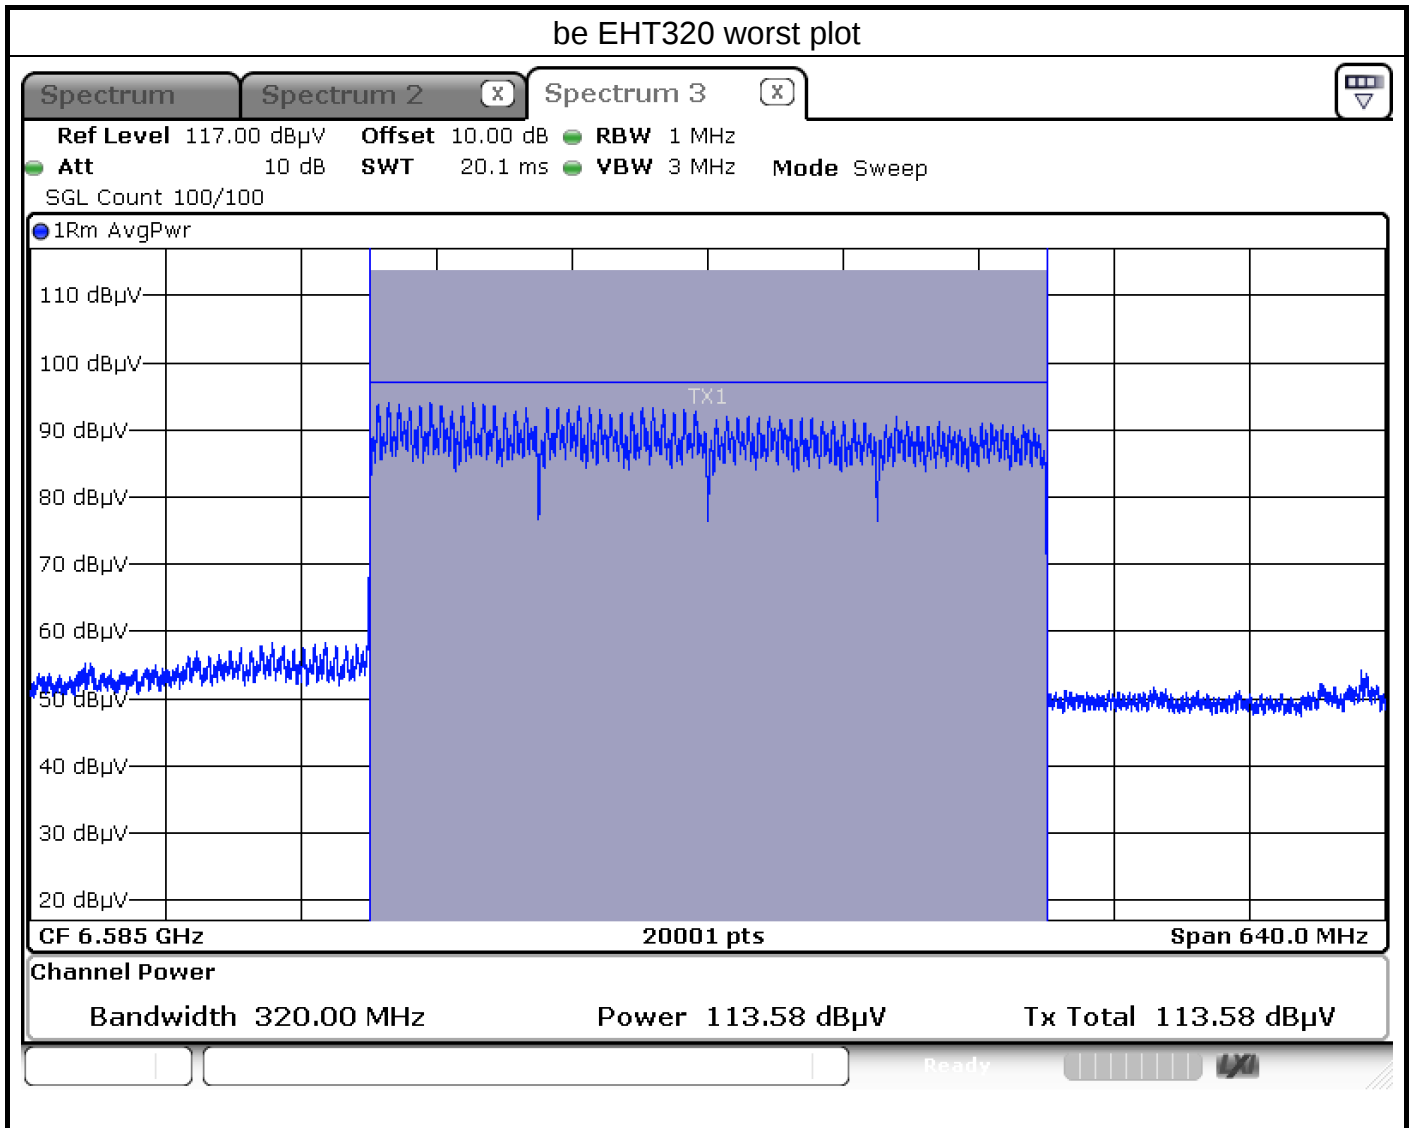



Mode	Freq MHz	Channel	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
11a	5955	1	98.83	1.18	0.07	100.08	4.88	5.00	Pass
11a	6175	45	98.33	1.48	0.07	99.88	4.68	5.00	Pass
11a	6415	93	97.22	2.72	0.07	100.01	4.81	5.00	Pass
11a	6435	97	97.17	2.86	0.07	100.10	4.90	5.00	Pass
11a	6475	105	96.83	3.00	0.07	99.90	4.70	5.00	Pass
11a	6515	113	96.61	3.15	0.07	99.83	4.63	5.00	Pass
11a	6535	117	96.51	3.27	0.07	99.85	4.65	5.00	Pass
11a	6715	153	96.69	3.32	0.07	100.08	4.88	5.00	Pass
11a	6855	181	96.13	3.78	0.07	99.98	4.78	5.00	Pass
11a	6875	185	95.99	3.89	0.07	99.95	4.75	5.00	Pass
11a	6895	189	95.94	4.01	0.07	100.02	4.82	5.00	Pass
11a	7015	213	95.18	4.84	0.07	100.09	4.89	5.00	Pass
11a	7095	229	94.93	5.07	0.07	100.07	4.87	5.00	Pass

Mode	Freq MHz	Channel	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
be EHT20	5955	1	98.5	1.18	0.05	99.73	4.53	5.00	Pass
be EHT20	6175	45	98.44	1.48	0.05	99.97	4.77	5.00	Pass
be EHT20	6415	93	97.14	2.72	0.05	99.91	4.71	5.00	Pass
be EHT20	6435	97	96.89	2.86	0.05	99.80	4.60	5.00	Pass
be EHT20	6475	105	96.51	3.00	0.05	99.56	4.36	5.00	Pass
be EHT20	6515	113	96.87	3.15	0.05	100.07	4.87	5.00	Pass
be EHT20	6535	117	96.78	3.27	0.05	100.10	4.90	5.00	Pass
be EHT20	6715	153	96.33	3.32	0.05	99.70	4.50	5.00	Pass
be EHT20	6855	181	96.03	3.78	0.05	99.86	4.66	5.00	Pass
be EHT20	6875	185	95.9	3.89	0.05	99.84	4.64	5.00	Pass
be EHT20	6895	189	95.94	4.01	0.05	100.00	4.80	5.00	Pass
be EHT20	7015	213	95.24	4.84	0.05	100.13	4.93	5.00	Pass
be EHT20	7095	229	94.96	5.07	0.05	100.08	4.88	5.00	Pass

Note:
$$\text{EIRP(dBm)} = \text{Final Level(dBuV/m)} - 95.2$$
$$\text{Final Level(dBuV/m)} = \text{Read Level (dBuV)} + \text{Path Loss(dB/m)} + \text{DT Factor(dB)}$$
$$\text{Path Loss} = \text{Antenna Factor(dBuV/m)} + \text{Cable Loss(dB)} - \text{Preamp Factor(dB)}$$



Mode	Freq MHz	Channel	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
be EHT40	5965	3	98.69	1.18	0.09	99.96	4.76	5.00	Pass
be EHT40	6165	43	98.44	1.43	0.09	99.96	4.76	5.00	Pass
be EHT40	6405	91	97.11	2.66	0.09	99.86	4.66	5.00	Pass
be EHT40	6445	99	97.08	2.92	0.09	100.09	4.89	5.00	Pass
be EHT40	6485	107	96.63	3.04	0.09	99.76	4.56	5.00	Pass
be EHT40	6525	115	96.79	3.21	0.09	100.09	4.89	5.00	Pass
be EHT40	6565	123	96.28	3.38	0.09	99.75	4.55	5.00	Pass
be EHT40	6725	155	96.67	3.32	0.09	100.08	4.88	5.00	Pass
be EHT40	6845	179	96.04	3.72	0.09	99.85	4.65	5.00	Pass
be EHT40	6885	187	95.72	3.96	0.09	99.77	4.57	5.00	Pass
be EHT40	6925	195	95.78	4.23	0.09	100.10	4.90	5.00	Pass
be EHT40	7005	211	95.14	4.82	0.09	100.05	4.85	5.00	Pass
be EHT40	7085	227	94.92	5.03	0.09	100.04	4.84	5.00	Pass

Mode	Freq MHz	Channel	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
be EHT80	5985	7	98.53	1.19	0.20	99.92	4.72	5.00	Pass
be EHT80	6145	39	98.29	1.35	0.20	99.84	4.64	5.00	Pass
be EHT80	6385	87	97.29	2.52	0.20	100.01	4.81	5.00	Pass
be EHT80	6465	103	96.87	2.98	0.20	100.05	4.85	5.00	Pass
be EHT80	6545	119	96.49	3.33	0.20	100.02	4.82	5.00	Pass
be EHT80	6625	135	95.98	3.41	0.20	99.59	4.39	5.00	Pass
be EHT80	6705	151	96.23	3.31	0.20	99.74	4.54	5.00	Pass
be EHT80	6785	167	96.41	3.42	0.20	100.03	4.83	5.00	Pass
be EHT80	6865	183	95.91	3.83	0.20	99.94	4.74	5.00	Pass
be EHT80	6945	199	95.38	4.39	0.20	99.97	4.77	5.00	Pass
be EHT80	7025	215	94.89	4.86	0.20	99.95	4.75	5.00	Pass

Mode	Freq MHz	Channel	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
be EHT160	6025	15	98.39	1.26	0.31	99.96	4.76	5.00	Pass
be EHT160	6185	47	97.94	1.53	0.31	99.78	4.58	5.00	Pass
be EHT160	6345	79	97.44	2.24	0.31	99.99	4.79	5.00	Pass
be EHT160	6505	111	96.45	3.1	0.31	99.86	4.66	5.00	Pass
be EHT160	6665	143	96.16	3.35	0.31	99.82	4.62	5.00	Pass
be EHT160	6825	175	95.89	3.61	0.31	99.81	4.61	5.00	Pass
be EHT160	6985	207	95.01	4.7	0.31	100.02	4.82	5.00	Pass

Note:

EIRP(dBm) = Final Level(dBuV/m) - 95.2

Final Level(dBuV/m) = Read Level (dBuV) + Path Loss(dB/m) + DT Factor(dB)

Path Loss = Antenna Factor(dBuV/m) + Cable Loss(dB) - Preamp Factor(dB)




Mode	Freq MHz	Channel	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
be EHT320	6105	31	94.57	1.25	0.52	96.34	1.14	5.00	Pass
be EHT320	6265	63	93.37	1.9	0.52	95.79	0.59	5.00	Pass
be EHT320	6425	95	93.59	2.79	0.52	96.90	1.70	5.00	Pass
be EHT320	6585	127	93.54	3.42	0.52	97.48	2.28	5.00	Pass
be EHT320	6745	159	92.25	3.33	0.52	96.10	0.90	5.00	Pass
be EHT320	6905	191	89.81	4.08	0.52	94.41	-0.79	5.00	Pass


Note:


EIRP(dBm) = Final Level(dBuV/m) - 95.2


Final Level(dBuV/m) = Read Level (dBuV) + Path Loss(dB/m) + DT Factor(dB)


Path Loss = Antenna Factor(dBuV/m) + Cable Loss(dB) - Preamp Factor(dB)

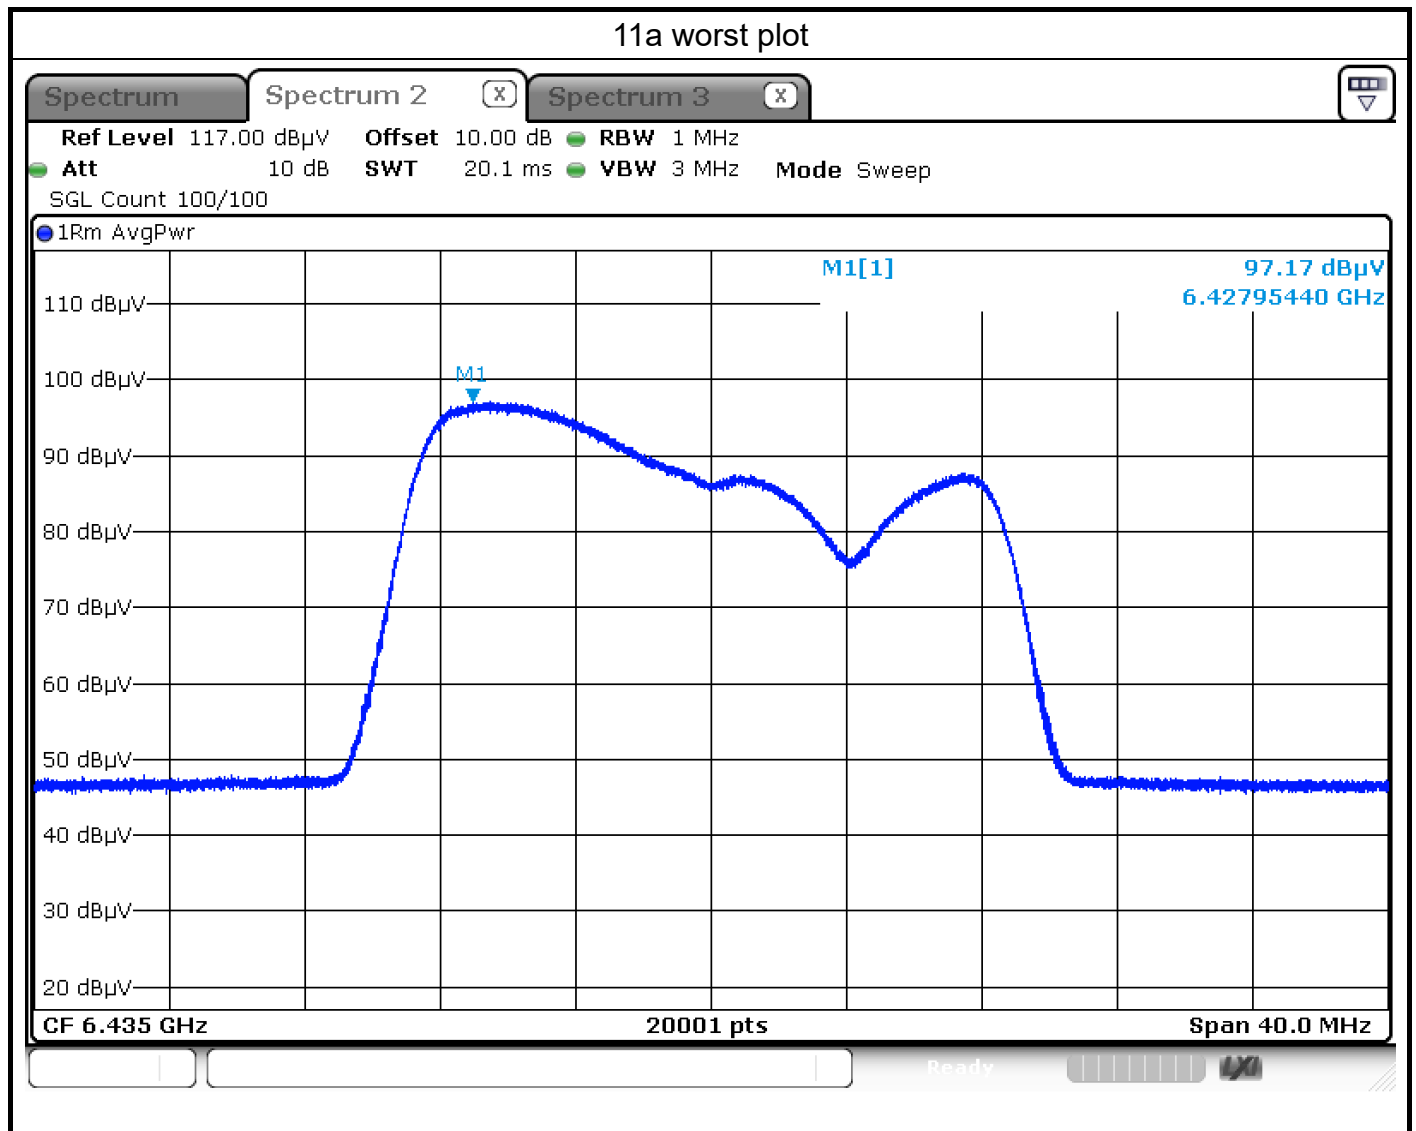


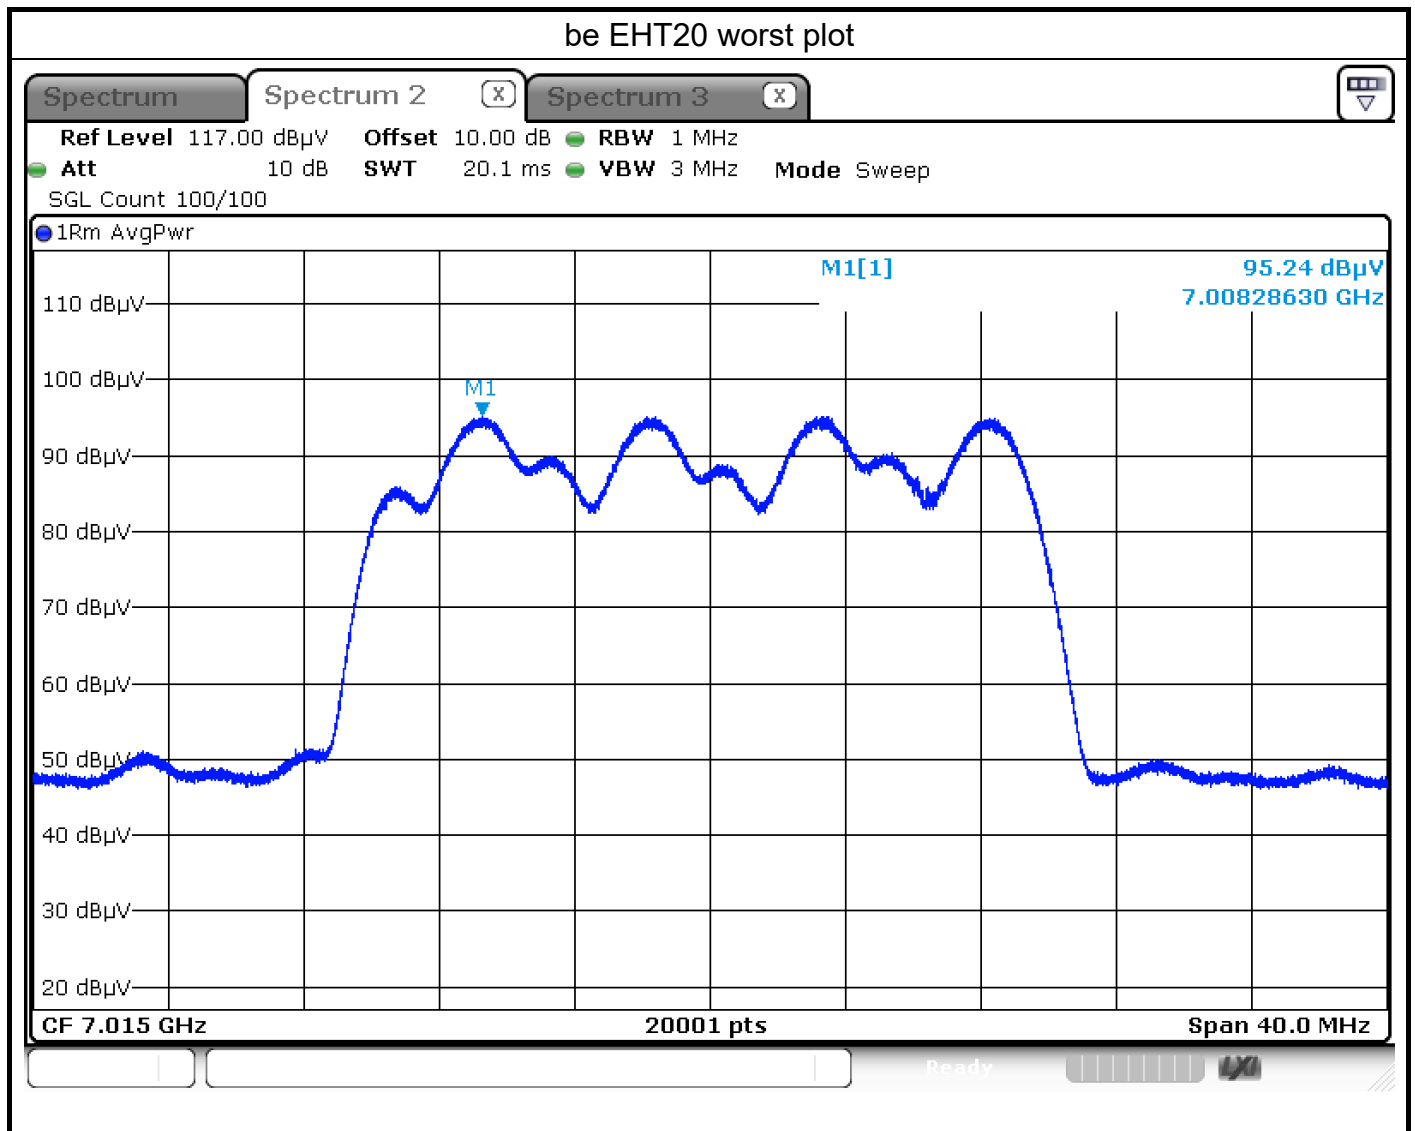

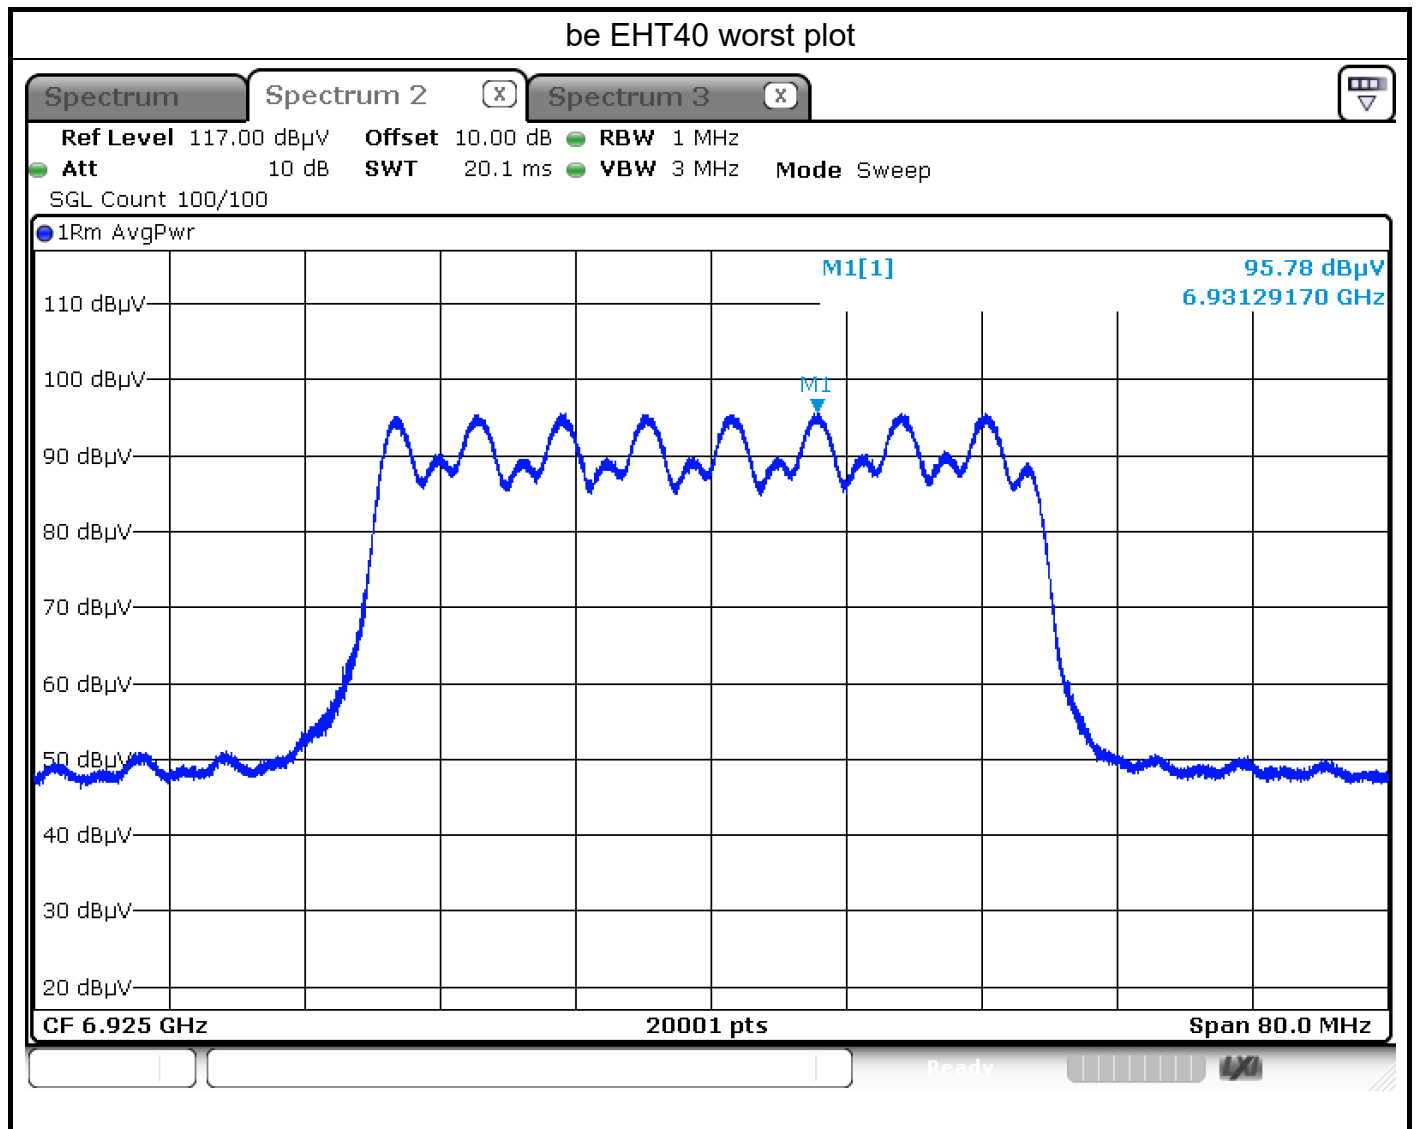

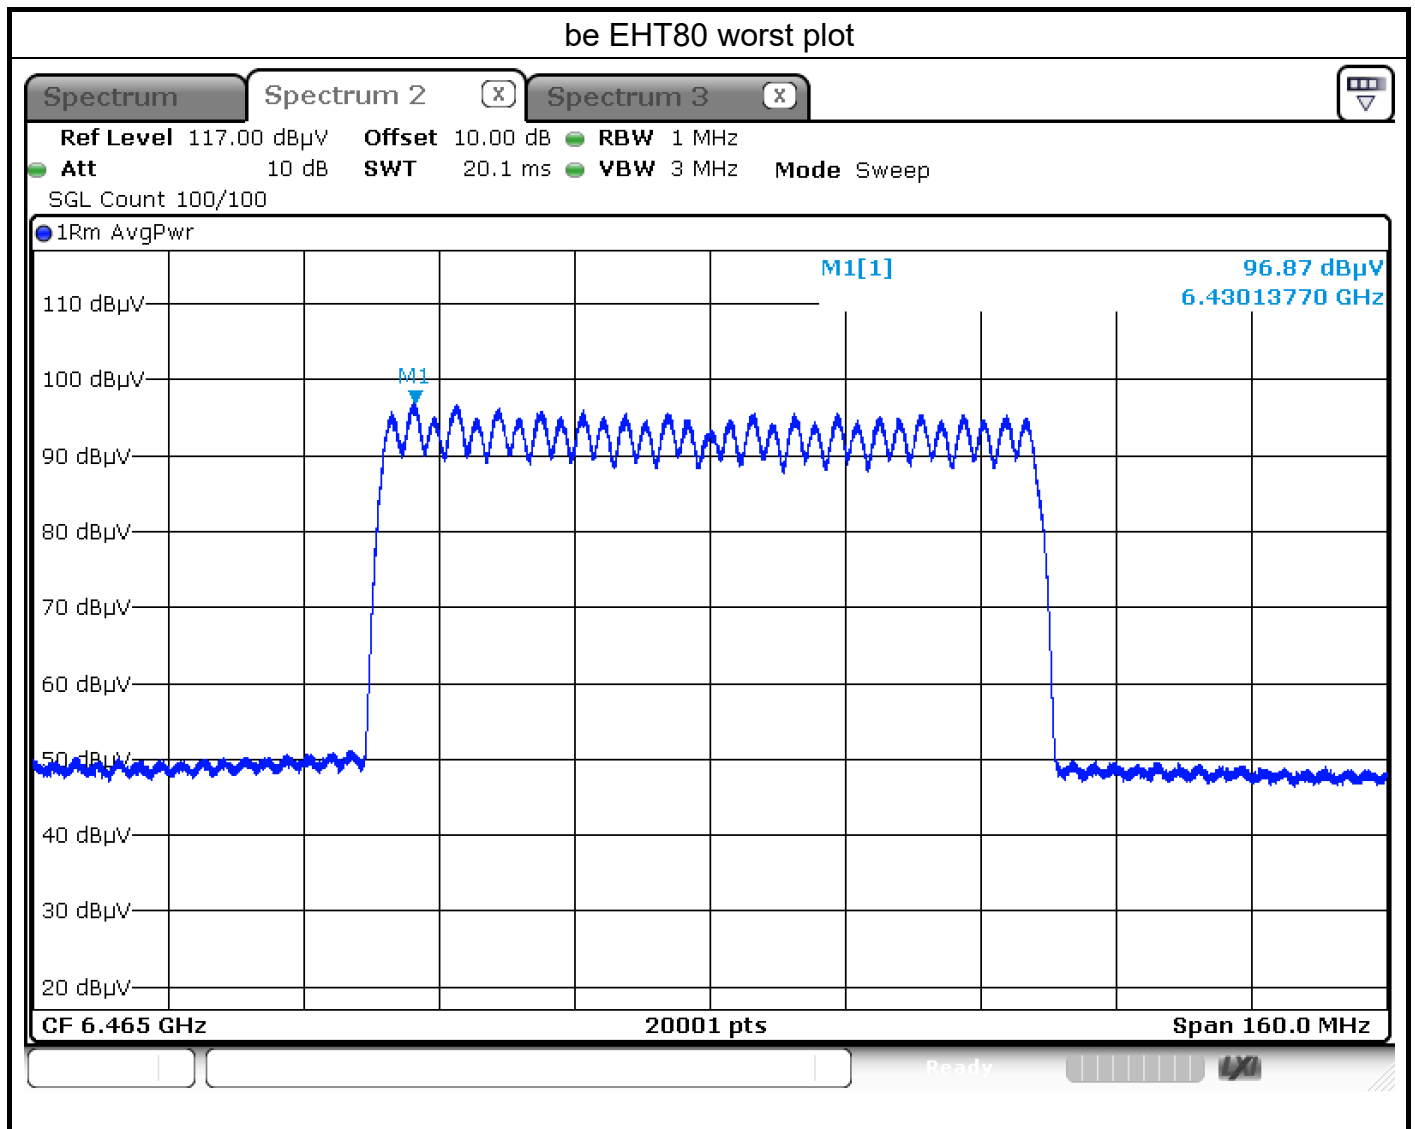

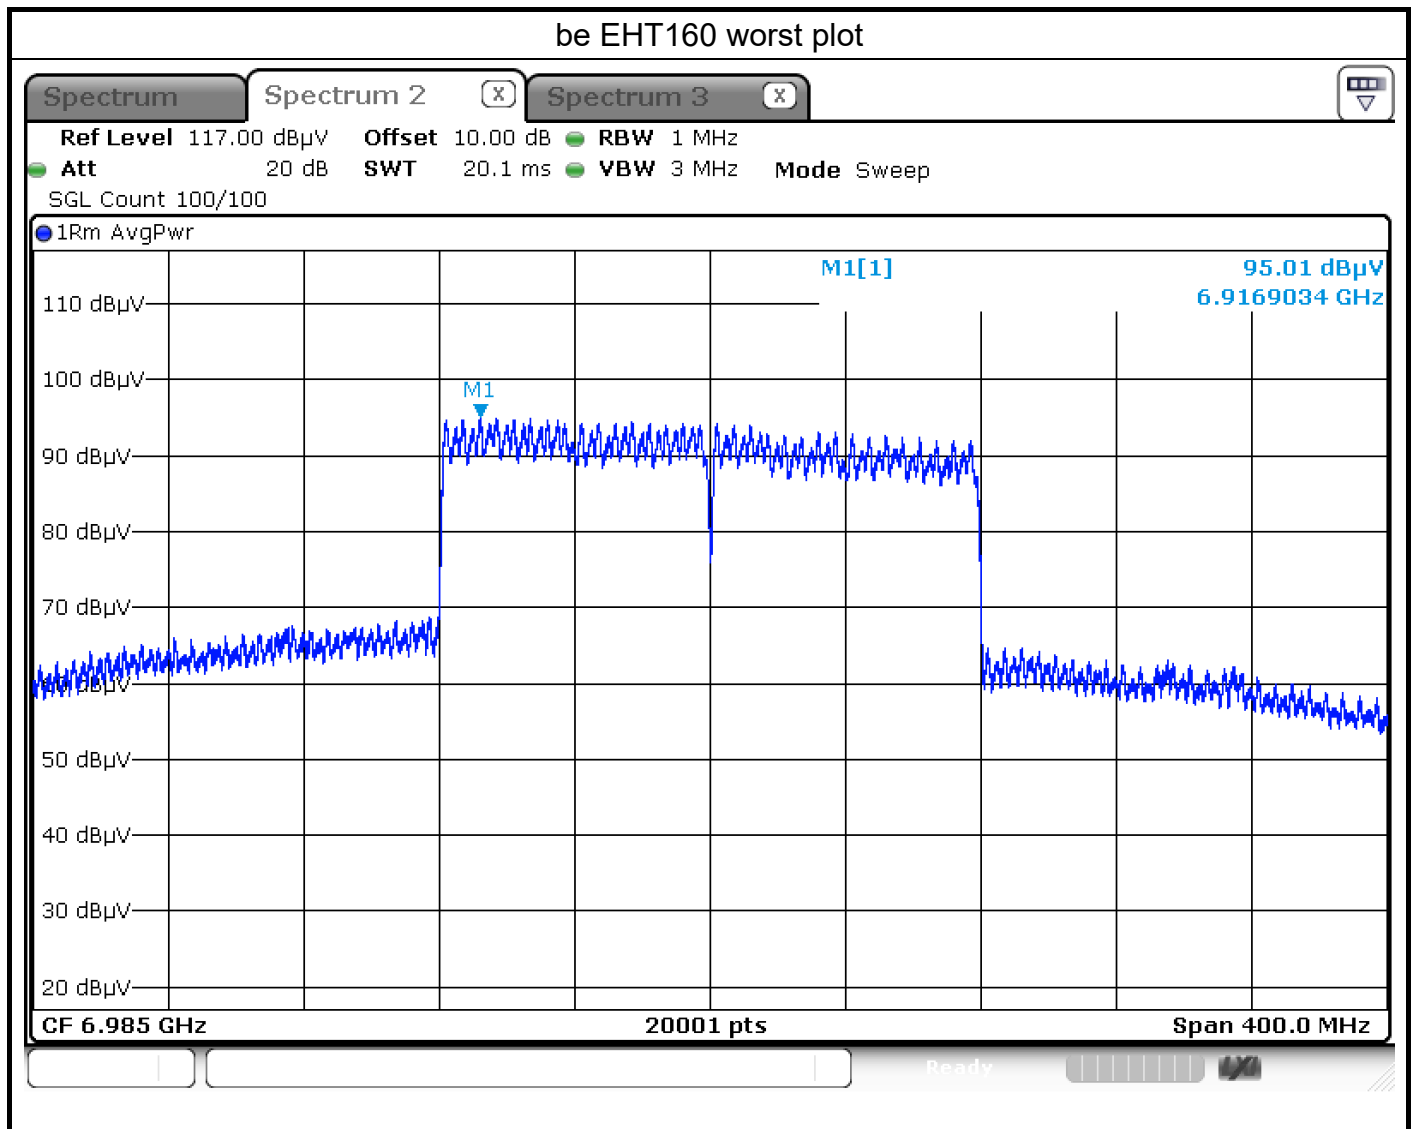

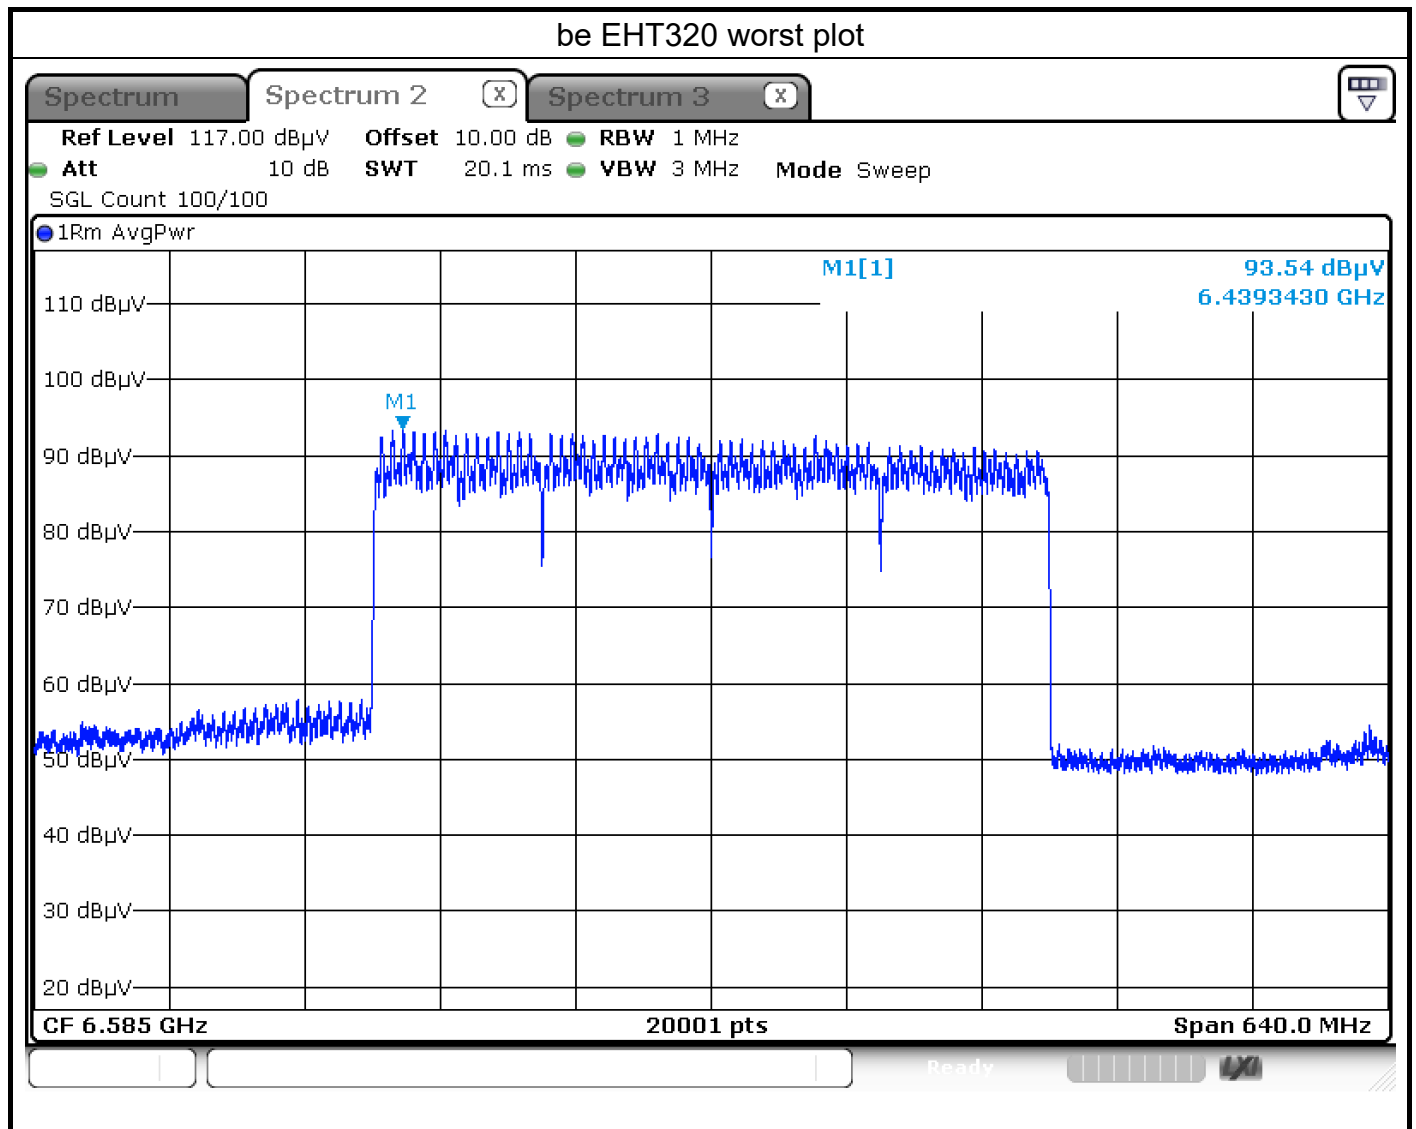



Unwanted Emissions (Below 1GHz)


Modulation	be EHT160		Test Freq. (MHz)		6185																																																																										
Polarization	Horizontal																																																																														
Test By :Brad Wu			Temperature(°C):21			Humidity(%):62																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>137.67</td><td>27.13</td><td>43.50</td><td>-16.37</td><td>36.59</td><td>-9.46</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>149.31</td><td>27.65</td><td>43.50</td><td>-15.85</td><td>36.43</td><td>-8.78</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>171.62</td><td>26.65</td><td>43.50</td><td>-16.85</td><td>35.87</td><td>-9.22</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>250.08</td><td>31.76</td><td>46.00</td><td>-14.24</td><td>41.54</td><td>-9.78</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>363.68</td><td>41.10</td><td>46.00</td><td>-4.90</td><td>47.58</td><td>-6.48</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>499.46</td><td>33.28</td><td>46.00</td><td>-12.72</td><td>36.64</td><td>-3.36</td><td>Peak</td><td>---</td><td>---</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	137.67	27.13	43.50	-16.37	36.59	-9.46	Peak	---	---	2	149.31	27.65	43.50	-15.85	36.43	-8.78	Peak	---	---	3	171.62	26.65	43.50	-16.85	35.87	-9.22	Peak	---	---	4	250.08	31.76	46.00	-14.24	41.54	-9.78	Peak	---	---	5	363.68	41.10	46.00	-4.90	47.58	-6.48	Peak	---	---	6	499.46	33.28	46.00	-12.72	36.64	-3.36	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	137.67	27.13	43.50	-16.37	36.59	-9.46	Peak	---	---																																																																						
2	149.31	27.65	43.50	-15.85	36.43	-8.78	Peak	---	---																																																																						
3	171.62	26.65	43.50	-16.85	35.87	-9.22	Peak	---	---																																																																						
4	250.08	31.76	46.00	-14.24	41.54	-9.78	Peak	---	---																																																																						
5	363.68	41.10	46.00	-4.90	47.58	-6.48	Peak	---	---																																																																						
6	499.46	33.28	46.00	-12.72	36.64	-3.36	Peak	---	---																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																															



Modulation	be EHT160	Test Freq. (MHz)	6185																																																																						
Polarization	Vertical																																																																								
Test By :Brad Wu Temperature(°C):21 Humidity(%):62																																																																									
Level (dBUV/m) CLASS-B <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>32.91</td><td>29.81</td><td>40.00</td><td>-10.19</td><td>39.73</td><td>-9.92</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>50.37</td><td>34.22</td><td>40.00</td><td>-5.78</td><td>42.41</td><td>-8.19</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>136.70</td><td>24.22</td><td>43.50</td><td>-19.28</td><td>33.78</td><td>-9.56</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>250.24</td><td>29.03</td><td>46.00</td><td>-16.97</td><td>38.80</td><td>-9.77</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>362.59</td><td>41.62</td><td>46.00</td><td>-4.38</td><td>48.12</td><td>-6.50</td><td>QP</td><td>151</td><td>52</td></tr><tr><td>6</td><td>499.56</td><td>38.02</td><td>46.00</td><td>-7.98</td><td>41.38</td><td>-3.36</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	32.91	29.81	40.00	-10.19	39.73	-9.92	Peak	---	---	2	50.37	34.22	40.00	-5.78	42.41	-8.19	Peak	---	---	3	136.70	24.22	43.50	-19.28	33.78	-9.56	Peak	---	---	4	250.24	29.03	46.00	-16.97	38.80	-9.77	Peak	---	---	5	362.59	41.62	46.00	-4.38	48.12	-6.50	QP	151	52	6	499.56	38.02	46.00	-7.98	41.38	-3.36	Peak	---	---
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	32.91	29.81	40.00	-10.19	39.73	-9.92	Peak	---	---																																																																
2	50.37	34.22	40.00	-5.78	42.41	-8.19	Peak	---	---																																																																
3	136.70	24.22	43.50	-19.28	33.78	-9.56	Peak	---	---																																																																
4	250.24	29.03	46.00	-16.97	38.80	-9.77	Peak	---	---																																																																
5	362.59	41.62	46.00	-4.38	48.12	-6.50	QP	151	52																																																																
6	499.56	38.02	46.00	-7.98	41.38	-3.36	Peak	---	---																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									



Unwanted Emissions (Above 1GHz) for 11a

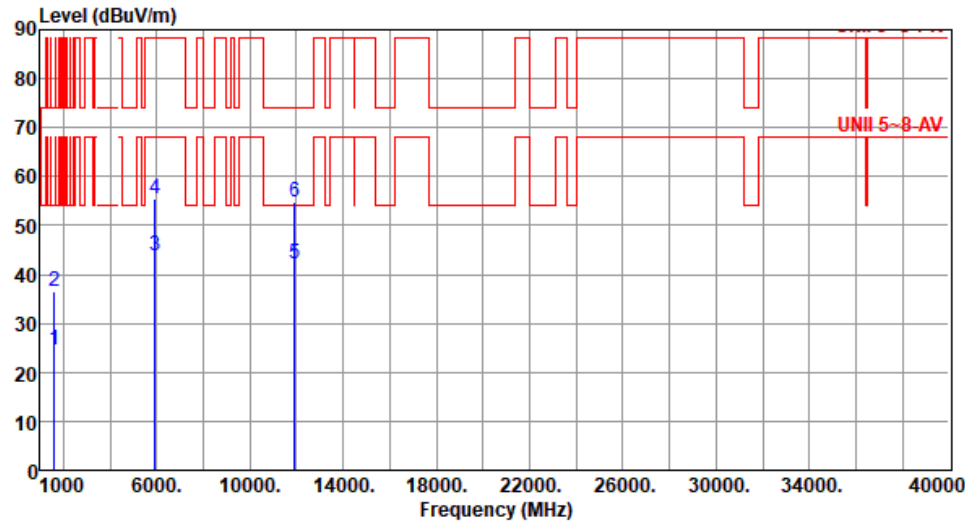Modulation	11a	Test Freq. (MHz)	5955																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>24.70</td><td>54.00</td><td>-29.30</td><td>31.93</td><td>-7.23</td><td>Average</td><td>100</td><td>142</td></tr><tr><td>2</td><td>1600.00</td><td>36.43</td><td>74.00</td><td>-37.57</td><td>43.66</td><td>-7.23</td><td>Peak</td><td>100</td><td>142</td></tr><tr><td>3</td><td>5925.00</td><td>43.86</td><td>68.20</td><td>-24.34</td><td>42.69</td><td>1.17</td><td>Average</td><td>172</td><td>97</td></tr><tr><td>4</td><td>5925.00</td><td>55.56</td><td>88.20</td><td>-32.64</td><td>54.39</td><td>1.17</td><td>Peak</td><td>172</td><td>97</td></tr><tr><td>5</td><td>11910.00</td><td>42.05</td><td>54.00</td><td>-11.95</td><td>35.62</td><td>6.43</td><td>Average</td><td>100</td><td>66</td></tr><tr><td>6</td><td>11910.00</td><td>54.82</td><td>74.00</td><td>-19.18</td><td>48.39</td><td>6.43</td><td>Peak</td><td>100</td><td>66</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.70	54.00	-29.30	31.93	-7.23	Average	100	142	2	1600.00	36.43	74.00	-37.57	43.66	-7.23	Peak	100	142	3	5925.00	43.86	68.20	-24.34	42.69	1.17	Average	172	97	4	5925.00	55.56	88.20	-32.64	54.39	1.17	Peak	172	97	5	11910.00	42.05	54.00	-11.95	35.62	6.43	Average	100	66	6	11910.00	54.82	74.00	-19.18	48.39	6.43	Peak	100	66
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.70	54.00	-29.30	31.93	-7.23	Average	100	142																																																																
2	1600.00	36.43	74.00	-37.57	43.66	-7.23	Peak	100	142																																																																
3	5925.00	43.86	68.20	-24.34	42.69	1.17	Average	172	97																																																																
4	5925.00	55.56	88.20	-32.64	54.39	1.17	Peak	172	97																																																																
5	11910.00	42.05	54.00	-11.95	35.62	6.43	Average	100	66																																																																
6	11910.00	54.82	74.00	-19.18	48.39	6.43	Peak	100	66																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	11a	Test Freq. (MHz)	5955																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>26.42</td><td>54.00</td><td>-27.58</td><td>33.65</td><td>-7.23</td><td>Average</td><td>100</td><td>253</td></tr><tr><td>2</td><td>1600.00</td><td>38.56</td><td>74.00</td><td>-35.44</td><td>45.79</td><td>-7.23</td><td>Peak</td><td>100</td><td>253</td></tr><tr><td>3</td><td>5925.00</td><td>43.66</td><td>68.20</td><td>-24.54</td><td>42.49</td><td>1.17</td><td>Average</td><td>188</td><td>241</td></tr><tr><td>4</td><td>5925.00</td><td>55.94</td><td>88.20</td><td>-32.26</td><td>54.77</td><td>1.17</td><td>Peak</td><td>188</td><td>241</td></tr><tr><td>5</td><td>11910.00</td><td>40.73</td><td>54.00</td><td>-13.27</td><td>34.30</td><td>6.43</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>6</td><td>11910.00</td><td>55.05</td><td>74.00</td><td>-18.95</td><td>48.62</td><td>6.43</td><td>Peak</td><td>100</td><td>30</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.42	54.00	-27.58	33.65	-7.23	Average	100	253	2	1600.00	38.56	74.00	-35.44	45.79	-7.23	Peak	100	253	3	5925.00	43.66	68.20	-24.54	42.49	1.17	Average	188	241	4	5925.00	55.94	88.20	-32.26	54.77	1.17	Peak	188	241	5	11910.00	40.73	54.00	-13.27	34.30	6.43	Average	100	30	6	11910.00	55.05	74.00	-18.95	48.62	6.43	Peak	100	30
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	26.42	54.00	-27.58	33.65	-7.23	Average	100	253																																																																
2	1600.00	38.56	74.00	-35.44	45.79	-7.23	Peak	100	253																																																																
3	5925.00	43.66	68.20	-24.54	42.49	1.17	Average	188	241																																																																
4	5925.00	55.94	88.20	-32.26	54.77	1.17	Peak	188	241																																																																
5	11910.00	40.73	54.00	-13.27	34.30	6.43	Average	100	30																																																																
6	11910.00	55.05	74.00	-18.95	48.62	6.43	Peak	100	30																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	11a	Test Freq. (MHz)	6175																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>24.31</td><td>54.00</td><td>-29.69</td><td>31.54</td><td>-7.23</td><td>Average</td><td>100</td><td>124</td></tr><tr><td>2</td><td>1600.00</td><td>36.53</td><td>74.00</td><td>-37.47</td><td>43.76</td><td>-7.23</td><td>Peak</td><td>100</td><td>124</td></tr><tr><td>3</td><td>9375.00</td><td>41.05</td><td>54.00</td><td>-12.95</td><td>33.59</td><td>7.46</td><td>Average</td><td>100</td><td>158</td></tr><tr><td>4</td><td>9375.00</td><td>53.82</td><td>74.00</td><td>-20.18</td><td>46.36</td><td>7.46</td><td>Peak</td><td>100</td><td>158</td></tr><tr><td>5</td><td>12350.00</td><td>41.76</td><td>54.00</td><td>-12.24</td><td>34.66</td><td>7.10</td><td>Average</td><td>100</td><td>126</td></tr><tr><td>6</td><td>12350.00</td><td>54.89</td><td>74.00</td><td>-19.11</td><td>47.79</td><td>7.10</td><td>Peak</td><td>100</td><td>126</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.31	54.00	-29.69	31.54	-7.23	Average	100	124	2	1600.00	36.53	74.00	-37.47	43.76	-7.23	Peak	100	124	3	9375.00	41.05	54.00	-12.95	33.59	7.46	Average	100	158	4	9375.00	53.82	74.00	-20.18	46.36	7.46	Peak	100	158	5	12350.00	41.76	54.00	-12.24	34.66	7.10	Average	100	126	6	12350.00	54.89	74.00	-19.11	47.79	7.10	Peak	100	126
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.31	54.00	-29.69	31.54	-7.23	Average	100	124																																																																
2	1600.00	36.53	74.00	-37.47	43.76	-7.23	Peak	100	124																																																																
3	9375.00	41.05	54.00	-12.95	33.59	7.46	Average	100	158																																																																
4	9375.00	53.82	74.00	-20.18	46.36	7.46	Peak	100	158																																																																
5	12350.00	41.76	54.00	-12.24	34.66	7.10	Average	100	126																																																																
6	12350.00	54.89	74.00	-19.11	47.79	7.10	Peak	100	126																																																																

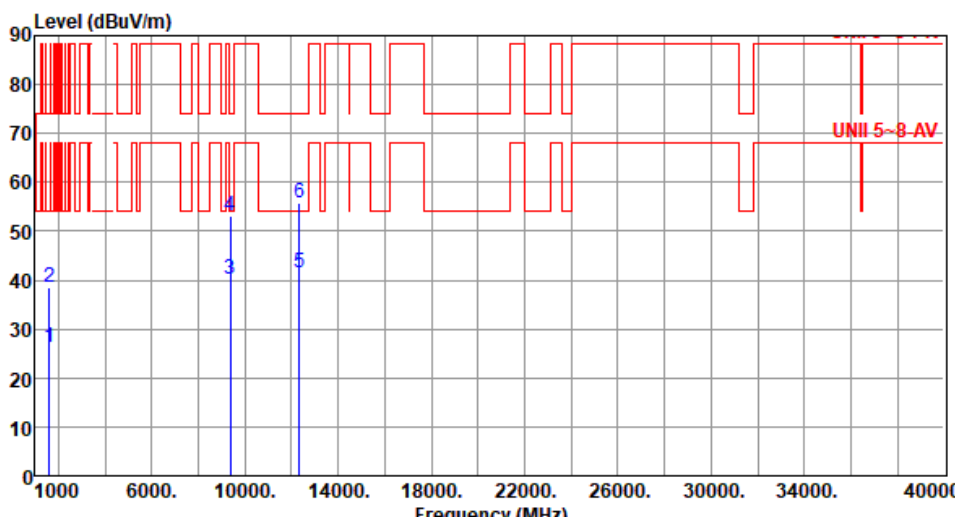


Modulation	11a	Test Freq. (MHz)	6175																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>26.37</td><td>54.00</td><td>-27.63</td><td>33.60</td><td>-7.23</td><td>Average</td><td>100</td><td>254</td></tr><tr><td>2</td><td>1600.00</td><td>38.36</td><td>74.00</td><td>-35.64</td><td>45.59</td><td>-7.23</td><td>Peak</td><td>100</td><td>254</td></tr><tr><td>3</td><td>9375.00</td><td>40.17</td><td>54.00</td><td>-13.83</td><td>32.71</td><td>7.46</td><td>Average</td><td>100</td><td>201</td></tr><tr><td>4</td><td>9375.00</td><td>53.25</td><td>74.00</td><td>-20.75</td><td>45.79</td><td>7.46</td><td>Peak</td><td>100</td><td>201</td></tr><tr><td>5</td><td>12350.00</td><td>41.65</td><td>54.00</td><td>-12.35</td><td>34.55</td><td>7.10</td><td>Average</td><td>100</td><td>225</td></tr><tr><td>6</td><td>12350.00</td><td>55.73</td><td>74.00</td><td>-18.27</td><td>48.63</td><td>7.10</td><td>Peak</td><td>100</td><td>225</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.37	54.00	-27.63	33.60	-7.23	Average	100	254	2	1600.00	38.36	74.00	-35.64	45.59	-7.23	Peak	100	254	3	9375.00	40.17	54.00	-13.83	32.71	7.46	Average	100	201	4	9375.00	53.25	74.00	-20.75	45.79	7.46	Peak	100	201	5	12350.00	41.65	54.00	-12.35	34.55	7.10	Average	100	225	6	12350.00	55.73	74.00	-18.27	48.63	7.10	Peak	100	225
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	26.37	54.00	-27.63	33.60	-7.23	Average	100	254																																																																
2	1600.00	38.36	74.00	-35.64	45.59	-7.23	Peak	100	254																																																																
3	9375.00	40.17	54.00	-13.83	32.71	7.46	Average	100	201																																																																
4	9375.00	53.25	74.00	-20.75	45.79	7.46	Peak	100	201																																																																
5	12350.00	41.65	54.00	-12.35	34.55	7.10	Average	100	225																																																																
6	12350.00	55.73	74.00	-18.27	48.63	7.10	Peak	100	225																																																																

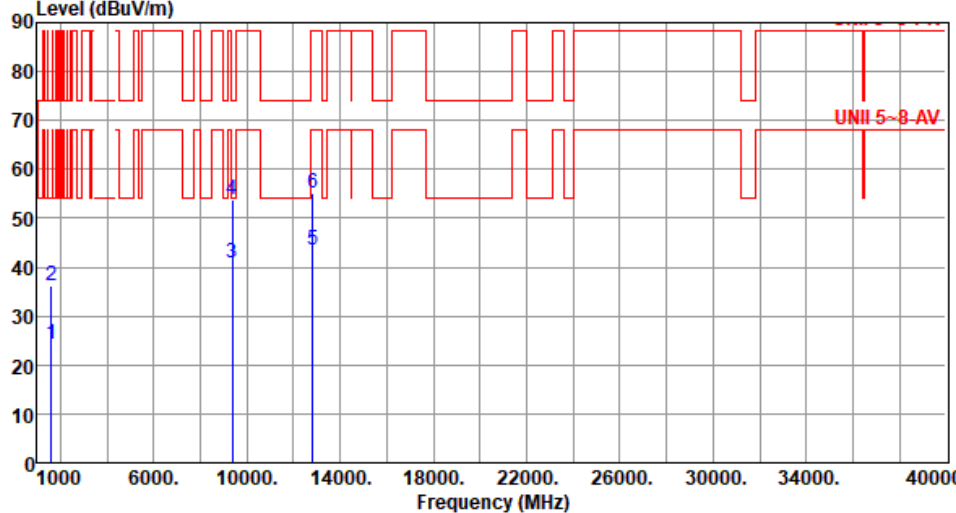

Modulation	11a	Test Freq. (MHz)	6415																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>24.36</td><td>54.00</td><td>-29.64</td><td>31.59</td><td>-7.23</td><td>Average</td><td>100</td><td>122</td></tr><tr><td>2</td><td>1600.00</td><td>36.30</td><td>74.00</td><td>-37.70</td><td>43.53</td><td>-7.23</td><td>Peak</td><td>100</td><td>122</td></tr><tr><td>3</td><td>9375.00</td><td>40.72</td><td>54.00</td><td>-13.28</td><td>33.26</td><td>7.46</td><td>Average</td><td>100</td><td>161</td></tr><tr><td>4</td><td>9375.00</td><td>53.78</td><td>74.00</td><td>-20.22</td><td>46.32</td><td>7.46</td><td>Peak</td><td>100</td><td>161</td></tr><tr><td>5</td><td>12830.00</td><td>43.40</td><td>68.20</td><td>-24.80</td><td>36.57</td><td>6.83</td><td>Average</td><td>100</td><td>253</td></tr><tr><td>6</td><td>12830.00</td><td>55.25</td><td>88.20</td><td>-32.95</td><td>48.42</td><td>6.83</td><td>Peak</td><td>100</td><td>253</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.36	54.00	-29.64	31.59	-7.23	Average	100	122	2	1600.00	36.30	74.00	-37.70	43.53	-7.23	Peak	100	122	3	9375.00	40.72	54.00	-13.28	33.26	7.46	Average	100	161	4	9375.00	53.78	74.00	-20.22	46.32	7.46	Peak	100	161	5	12830.00	43.40	68.20	-24.80	36.57	6.83	Average	100	253	6	12830.00	55.25	88.20	-32.95	48.42	6.83	Peak	100	253
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.36	54.00	-29.64	31.59	-7.23	Average	100	122																																																																
2	1600.00	36.30	74.00	-37.70	43.53	-7.23	Peak	100	122																																																																
3	9375.00	40.72	54.00	-13.28	33.26	7.46	Average	100	161																																																																
4	9375.00	53.78	74.00	-20.22	46.32	7.46	Peak	100	161																																																																
5	12830.00	43.40	68.20	-24.80	36.57	6.83	Average	100	253																																																																
6	12830.00	55.25	88.20	-32.95	48.42	6.83	Peak	100	253																																																																

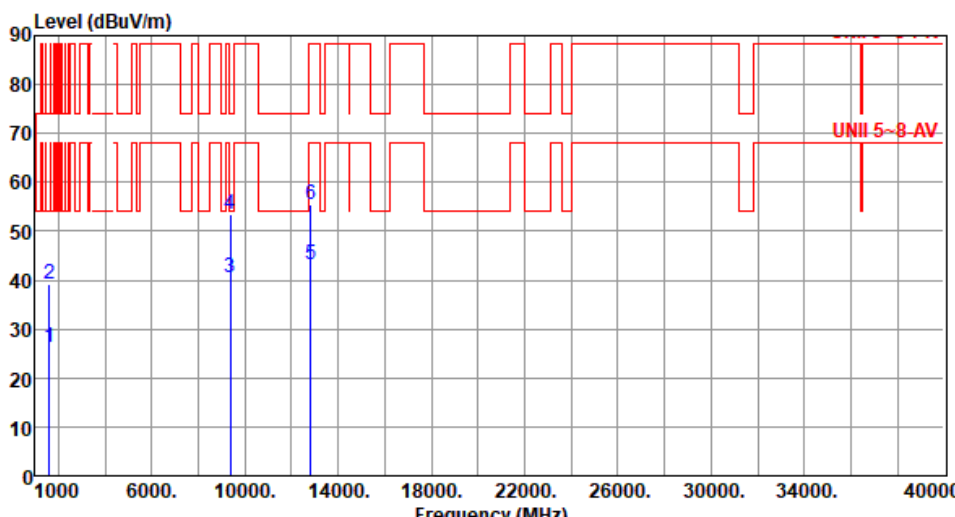


Modulation	11a	Test Freq. (MHz)	6415						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	26.07	54.00	-27.93	33.30	-7.23	Average	100	163
2	1600.00	39.30	74.00	-34.70	46.53	-7.23	Peak	100	163
3	9375.00	40.40	54.00	-13.60	32.94	7.46	Average	100	214
4	9375.00	53.38	74.00	-20.62	45.92	7.46	Peak	100	214
5	12830.00	43.31	68.20	-24.89	36.48	6.83	Average	100	177
6	12830.00	55.33	88.20	-32.87	48.50	6.83	Peak	100	177

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).




Modulation	11a	Test Freq. (MHz)	6435																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>24.40</td><td>54.00</td><td>-29.60</td><td>31.63</td><td>-7.23</td><td>Average</td><td>100</td><td>136</td></tr><tr><td>2</td><td>1600.00</td><td>36.52</td><td>74.00</td><td>-37.48</td><td>43.75</td><td>-7.23</td><td>Peak</td><td>100</td><td>136</td></tr><tr><td>3</td><td>9375.00</td><td>40.78</td><td>54.00</td><td>-13.22</td><td>33.32</td><td>7.46</td><td>Average</td><td>100</td><td>168</td></tr><tr><td>4</td><td>9375.00</td><td>53.88</td><td>74.00</td><td>-20.12</td><td>46.42</td><td>7.46</td><td>Peak</td><td>100</td><td>168</td></tr><tr><td>5</td><td>12870.00</td><td>42.53</td><td>68.20</td><td>-25.67</td><td>35.75</td><td>6.78</td><td>Average</td><td>100</td><td>229</td></tr><tr><td>6</td><td>12870.00</td><td>55.30</td><td>88.20</td><td>-32.90</td><td>48.52</td><td>6.78</td><td>Peak</td><td>100</td><td>229</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.40	54.00	-29.60	31.63	-7.23	Average	100	136	2	1600.00	36.52	74.00	-37.48	43.75	-7.23	Peak	100	136	3	9375.00	40.78	54.00	-13.22	33.32	7.46	Average	100	168	4	9375.00	53.88	74.00	-20.12	46.42	7.46	Peak	100	168	5	12870.00	42.53	68.20	-25.67	35.75	6.78	Average	100	229	6	12870.00	55.30	88.20	-32.90	48.52	6.78	Peak	100	229
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.40	54.00	-29.60	31.63	-7.23	Average	100	136																																																																
2	1600.00	36.52	74.00	-37.48	43.75	-7.23	Peak	100	136																																																																
3	9375.00	40.78	54.00	-13.22	33.32	7.46	Average	100	168																																																																
4	9375.00	53.88	74.00	-20.12	46.42	7.46	Peak	100	168																																																																
5	12870.00	42.53	68.20	-25.67	35.75	6.78	Average	100	229																																																																
6	12870.00	55.30	88.20	-32.90	48.52	6.78	Peak	100	229																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

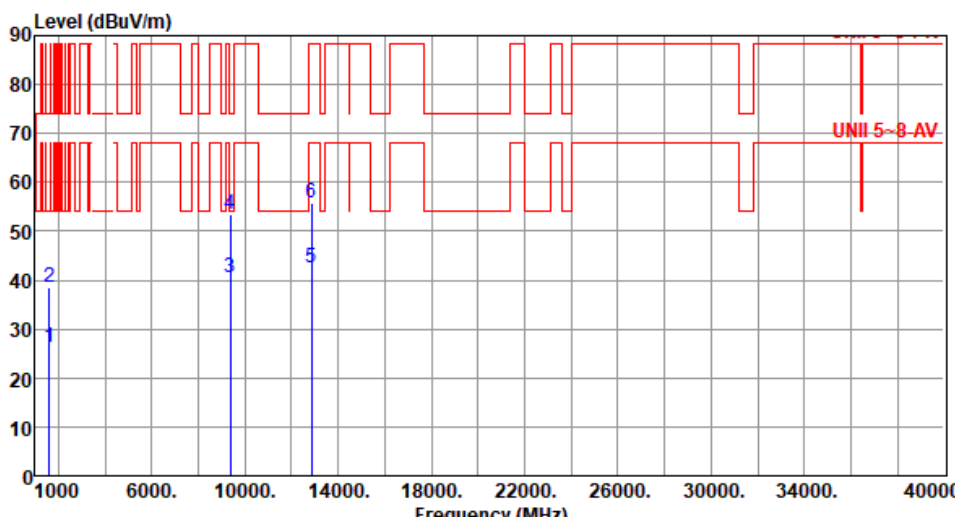

Modulation	11a	Test Freq. (MHz)	6435																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>26.38</td><td>54.00</td><td>-27.62</td><td>33.61</td><td>-7.23</td><td>Average</td><td>100</td><td>250</td></tr><tr><td>2</td><td>1600.00</td><td>38.36</td><td>74.00</td><td>-35.64</td><td>45.59</td><td>-7.23</td><td>Peak</td><td>100</td><td>250</td></tr><tr><td>3</td><td>9375.00</td><td>40.47</td><td>54.00</td><td>-13.53</td><td>33.01</td><td>7.46</td><td>Average</td><td>100</td><td>201</td></tr><tr><td>4</td><td>9375.00</td><td>53.46</td><td>74.00</td><td>-20.54</td><td>46.00</td><td>7.46</td><td>Peak</td><td>100</td><td>201</td></tr><tr><td>5</td><td>12870.00</td><td>42.40</td><td>68.20</td><td>-25.80</td><td>35.62</td><td>6.78</td><td>Average</td><td>100</td><td>126</td></tr><tr><td>6</td><td>12870.00</td><td>55.68</td><td>88.20</td><td>-32.52</td><td>48.90</td><td>6.78</td><td>Peak</td><td>100</td><td>126</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.38	54.00	-27.62	33.61	-7.23	Average	100	250	2	1600.00	38.36	74.00	-35.64	45.59	-7.23	Peak	100	250	3	9375.00	40.47	54.00	-13.53	33.01	7.46	Average	100	201	4	9375.00	53.46	74.00	-20.54	46.00	7.46	Peak	100	201	5	12870.00	42.40	68.20	-25.80	35.62	6.78	Average	100	126	6	12870.00	55.68	88.20	-32.52	48.90	6.78	Peak	100	126
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	26.38	54.00	-27.62	33.61	-7.23	Average	100	250																																																																
2	1600.00	38.36	74.00	-35.64	45.59	-7.23	Peak	100	250																																																																
3	9375.00	40.47	54.00	-13.53	33.01	7.46	Average	100	201																																																																
4	9375.00	53.46	74.00	-20.54	46.00	7.46	Peak	100	201																																																																
5	12870.00	42.40	68.20	-25.80	35.62	6.78	Average	100	126																																																																
6	12870.00	55.68	88.20	-32.52	48.90	6.78	Peak	100	126																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

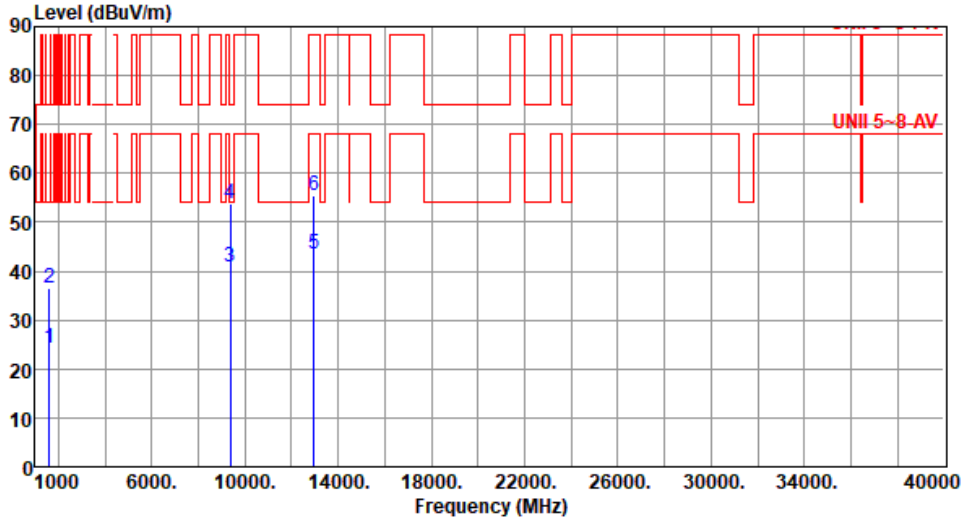

Modulation	11a	Test Freq. (MHz)	6475																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>24.37</td><td>54.00</td><td>-29.63</td><td>31.60</td><td>-7.23</td><td>Average</td><td>100</td><td>120</td></tr><tr><td>2</td><td>1600.00</td><td>36.48</td><td>74.00</td><td>-37.52</td><td>43.71</td><td>-7.23</td><td>Peak</td><td>100</td><td>120</td></tr><tr><td>3</td><td>9375.00</td><td>40.82</td><td>54.00</td><td>-13.18</td><td>33.36</td><td>7.46</td><td>Average</td><td>100</td><td>163</td></tr><tr><td>4</td><td>9375.00</td><td>53.95</td><td>74.00</td><td>-20.05</td><td>46.49</td><td>7.46</td><td>Peak</td><td>100</td><td>163</td></tr><tr><td>5</td><td>12950.00</td><td>43.48</td><td>68.20</td><td>-24.72</td><td>36.81</td><td>6.67</td><td>Average</td><td>100</td><td>243</td></tr><tr><td>6</td><td>12950.00</td><td>55.47</td><td>88.20</td><td>-32.73</td><td>48.80</td><td>6.67</td><td>Peak</td><td>100</td><td>243</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.37	54.00	-29.63	31.60	-7.23	Average	100	120	2	1600.00	36.48	74.00	-37.52	43.71	-7.23	Peak	100	120	3	9375.00	40.82	54.00	-13.18	33.36	7.46	Average	100	163	4	9375.00	53.95	74.00	-20.05	46.49	7.46	Peak	100	163	5	12950.00	43.48	68.20	-24.72	36.81	6.67	Average	100	243	6	12950.00	55.47	88.20	-32.73	48.80	6.67	Peak	100	243
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.37	54.00	-29.63	31.60	-7.23	Average	100	120																																																																
2	1600.00	36.48	74.00	-37.52	43.71	-7.23	Peak	100	120																																																																
3	9375.00	40.82	54.00	-13.18	33.36	7.46	Average	100	163																																																																
4	9375.00	53.95	74.00	-20.05	46.49	7.46	Peak	100	163																																																																
5	12950.00	43.48	68.20	-24.72	36.81	6.67	Average	100	243																																																																
6	12950.00	55.47	88.20	-32.73	48.80	6.67	Peak	100	243																																																																




Modulation	11a	Test Freq. (MHz)	6475																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>26.39</td><td>54.00</td><td>-27.61</td><td>33.62</td><td>-7.23</td><td>Average</td><td>100</td><td>260</td></tr><tr><td>2</td><td>1600.00</td><td>38.29</td><td>74.00</td><td>-35.71</td><td>45.52</td><td>-7.23</td><td>Peak</td><td>100</td><td>260</td></tr><tr><td>3</td><td>9375.00</td><td>40.05</td><td>54.00</td><td>-13.95</td><td>32.59</td><td>7.46</td><td>Average</td><td>100</td><td>199</td></tr><tr><td>4</td><td>9375.00</td><td>53.17</td><td>74.00</td><td>-20.83</td><td>45.71</td><td>7.46</td><td>Peak</td><td>100</td><td>199</td></tr><tr><td>5</td><td>12950.00</td><td>43.35</td><td>68.20</td><td>-24.85</td><td>36.68</td><td>6.67</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>6</td><td>12950.00</td><td>55.47</td><td>88.20</td><td>-32.73</td><td>48.80</td><td>6.67</td><td>Peak</td><td>100</td><td>218</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.39	54.00	-27.61	33.62	-7.23	Average	100	260	2	1600.00	38.29	74.00	-35.71	45.52	-7.23	Peak	100	260	3	9375.00	40.05	54.00	-13.95	32.59	7.46	Average	100	199	4	9375.00	53.17	74.00	-20.83	45.71	7.46	Peak	100	199	5	12950.00	43.35	68.20	-24.85	36.68	6.67	Average	100	218	6	12950.00	55.47	88.20	-32.73	48.80	6.67	Peak	100	218
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	26.39	54.00	-27.61	33.62	-7.23	Average	100	260																																																																
2	1600.00	38.29	74.00	-35.71	45.52	-7.23	Peak	100	260																																																																
3	9375.00	40.05	54.00	-13.95	32.59	7.46	Average	100	199																																																																
4	9375.00	53.17	74.00	-20.83	45.71	7.46	Peak	100	199																																																																
5	12950.00	43.35	68.20	-24.85	36.68	6.67	Average	100	218																																																																
6	12950.00	55.47	88.20	-32.73	48.80	6.67	Peak	100	218																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	11a	Test Freq. (MHz)	6515
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):25 Humidity(%):62			
Level (dBuV/m)			

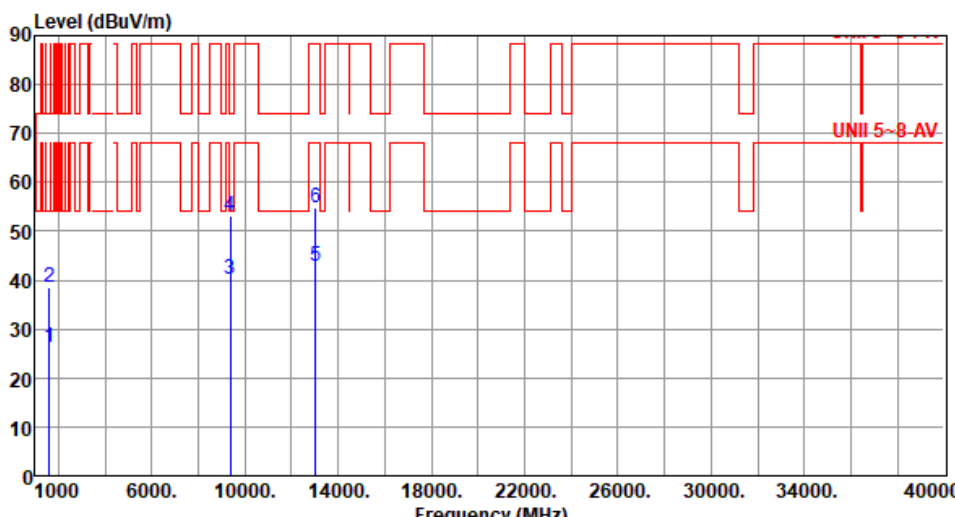

Modulation	11a	Test Freq. (MHz)	6515																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>26.32</td><td>54.00</td><td>-27.68</td><td>33.55</td><td>-7.23</td><td>Average</td><td>100</td><td>255</td></tr><tr><td>2</td><td>1600.00</td><td>38.40</td><td>74.00</td><td>-35.60</td><td>45.63</td><td>-7.23</td><td>Peak</td><td>100</td><td>255</td></tr><tr><td>3</td><td>9375.00</td><td>40.13</td><td>54.00</td><td>-13.87</td><td>32.67</td><td>7.46</td><td>Average</td><td>100</td><td>206</td></tr><tr><td>4</td><td>9375.00</td><td>53.07</td><td>74.00</td><td>-20.93</td><td>45.61</td><td>7.46</td><td>Peak</td><td>100</td><td>206</td></tr><tr><td>5</td><td>13030.00</td><td>42.87</td><td>68.20</td><td>-25.33</td><td>36.57</td><td>6.30</td><td>Average</td><td>100</td><td>217</td></tr><tr><td>6</td><td>13030.00</td><td>54.92</td><td>88.20</td><td>-33.28</td><td>48.62</td><td>6.30</td><td>Peak</td><td>100</td><td>217</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.32	54.00	-27.68	33.55	-7.23	Average	100	255	2	1600.00	38.40	74.00	-35.60	45.63	-7.23	Peak	100	255	3	9375.00	40.13	54.00	-13.87	32.67	7.46	Average	100	206	4	9375.00	53.07	74.00	-20.93	45.61	7.46	Peak	100	206	5	13030.00	42.87	68.20	-25.33	36.57	6.30	Average	100	217	6	13030.00	54.92	88.20	-33.28	48.62	6.30	Peak	100	217
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	26.32	54.00	-27.68	33.55	-7.23	Average	100	255																																																																
2	1600.00	38.40	74.00	-35.60	45.63	-7.23	Peak	100	255																																																																
3	9375.00	40.13	54.00	-13.87	32.67	7.46	Average	100	206																																																																
4	9375.00	53.07	74.00	-20.93	45.61	7.46	Peak	100	206																																																																
5	13030.00	42.87	68.20	-25.33	36.57	6.30	Average	100	217																																																																
6	13030.00	54.92	88.20	-33.28	48.62	6.30	Peak	100	217																																																																

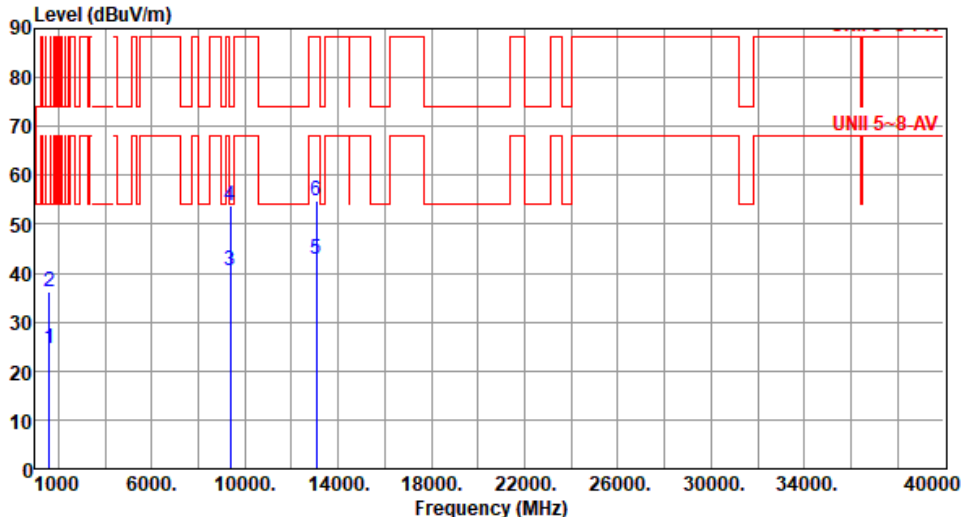

Modulation	11a	Test Freq. (MHz)	6535																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>24.41</td><td>54.00</td><td>-29.59</td><td>31.64</td><td>-7.23</td><td>Average</td><td>100</td><td>129</td></tr><tr><td>2</td><td>1600.00</td><td>36.33</td><td>74.00</td><td>-37.67</td><td>43.56</td><td>-7.23</td><td>Peak</td><td>100</td><td>129</td></tr><tr><td>3</td><td>9375.00</td><td>40.66</td><td>54.00</td><td>-13.34</td><td>33.20</td><td>7.46</td><td>Average</td><td>100</td><td>160</td></tr><tr><td>4</td><td>9375.00</td><td>53.87</td><td>74.00</td><td>-20.13</td><td>46.41</td><td>7.46</td><td>Peak</td><td>100</td><td>160</td></tr><tr><td>5</td><td>13070.00</td><td>42.70</td><td>68.20</td><td>-25.50</td><td>36.57</td><td>6.13</td><td>Average</td><td>100</td><td>219</td></tr><tr><td>6</td><td>13070.00</td><td>54.86</td><td>88.20</td><td>-33.34</td><td>48.73</td><td>6.13</td><td>Peak</td><td>100</td><td>219</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.41	54.00	-29.59	31.64	-7.23	Average	100	129	2	1600.00	36.33	74.00	-37.67	43.56	-7.23	Peak	100	129	3	9375.00	40.66	54.00	-13.34	33.20	7.46	Average	100	160	4	9375.00	53.87	74.00	-20.13	46.41	7.46	Peak	100	160	5	13070.00	42.70	68.20	-25.50	36.57	6.13	Average	100	219	6	13070.00	54.86	88.20	-33.34	48.73	6.13	Peak	100	219
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.41	54.00	-29.59	31.64	-7.23	Average	100	129																																																																
2	1600.00	36.33	74.00	-37.67	43.56	-7.23	Peak	100	129																																																																
3	9375.00	40.66	54.00	-13.34	33.20	7.46	Average	100	160																																																																
4	9375.00	53.87	74.00	-20.13	46.41	7.46	Peak	100	160																																																																
5	13070.00	42.70	68.20	-25.50	36.57	6.13	Average	100	219																																																																
6	13070.00	54.86	88.20	-33.34	48.73	6.13	Peak	100	219																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	11a	Test Freq. (MHz)	6535
Polarization	Vertical		
Test By :Allen Lee Temperature(°C):25 Humidity(%):62			
Level (dBUV/m) <			




Modulation	11a	Test Freq. (MHz)	6715																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBUV/m) 90 80 70 60 50 40 30 20 10 0 1000 6000 10000 14000 18000 22000 26000 30000 34000 40000 Frequency (MHz) 1 2 3 4 5 6 UNII 5~8-AV <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>24.30</td><td>54.00</td><td>-29.70</td><td>31.53</td><td>-7.23</td><td>Average</td><td>100</td><td>123</td></tr><tr><td>2</td><td>1600.00</td><td>36.55</td><td>74.00</td><td>-37.45</td><td>43.78</td><td>-7.23</td><td>Peak</td><td>100</td><td>123</td></tr><tr><td>3</td><td>9375.00</td><td>40.72</td><td>54.00</td><td>-13.28</td><td>33.26</td><td>7.46</td><td>Average</td><td>100</td><td>156</td></tr><tr><td>4</td><td>9375.00</td><td>53.94</td><td>74.00</td><td>-20.06</td><td>46.48</td><td>7.46</td><td>Peak</td><td>100</td><td>156</td></tr><tr><td>5</td><td>13430.00</td><td>43.33</td><td>68.20</td><td>-24.87</td><td>37.10</td><td>6.23</td><td>Average</td><td>100</td><td>180</td></tr><tr><td>6</td><td>13430.00</td><td>55.38</td><td>88.20</td><td>-32.82</td><td>49.15</td><td>6.23</td><td>Peak</td><td>100</td><td>180</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.30	54.00	-29.70	31.53	-7.23	Average	100	123	2	1600.00	36.55	74.00	-37.45	43.78	-7.23	Peak	100	123	3	9375.00	40.72	54.00	-13.28	33.26	7.46	Average	100	156	4	9375.00	53.94	74.00	-20.06	46.48	7.46	Peak	100	156	5	13430.00	43.33	68.20	-24.87	37.10	6.23	Average	100	180	6	13430.00	55.38	88.20	-32.82	49.15	6.23	Peak	100	180
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.30	54.00	-29.70	31.53	-7.23	Average	100	123																																																																
2	1600.00	36.55	74.00	-37.45	43.78	-7.23	Peak	100	123																																																																
3	9375.00	40.72	54.00	-13.28	33.26	7.46	Average	100	156																																																																
4	9375.00	53.94	74.00	-20.06	46.48	7.46	Peak	100	156																																																																
5	13430.00	43.33	68.20	-24.87	37.10	6.23	Average	100	180																																																																
6	13430.00	55.38	88.20	-32.82	49.15	6.23	Peak	100	180																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	11a	Test Freq. (MHz)	6715																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>26.46</td><td>54.00</td><td>-27.54</td><td>33.69</td><td>-7.23</td><td>Average</td><td>100</td><td>267</td></tr><tr><td>2</td><td>1600.00</td><td>38.56</td><td>74.00</td><td>-35.44</td><td>45.79</td><td>-7.23</td><td>Peak</td><td>100</td><td>267</td></tr><tr><td>3</td><td>9375.00</td><td>40.32</td><td>54.00</td><td>-13.68</td><td>32.86</td><td>7.46</td><td>Average</td><td>100</td><td>209</td></tr><tr><td>4</td><td>9375.00</td><td>53.18</td><td>74.00</td><td>-20.82</td><td>45.72</td><td>7.46</td><td>Peak</td><td>100</td><td>209</td></tr><tr><td>5</td><td>13430.00</td><td>43.46</td><td>68.20</td><td>-24.74</td><td>37.23</td><td>6.23</td><td>Average</td><td>100</td><td>121</td></tr><tr><td>6</td><td>13430.00</td><td>55.43</td><td>88.20</td><td>-32.77</td><td>49.20</td><td>6.23</td><td>Peak</td><td>100</td><td>121</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.46	54.00	-27.54	33.69	-7.23	Average	100	267	2	1600.00	38.56	74.00	-35.44	45.79	-7.23	Peak	100	267	3	9375.00	40.32	54.00	-13.68	32.86	7.46	Average	100	209	4	9375.00	53.18	74.00	-20.82	45.72	7.46	Peak	100	209	5	13430.00	43.46	68.20	-24.74	37.23	6.23	Average	100	121	6	13430.00	55.43	88.20	-32.77	49.20	6.23	Peak	100	121
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	26.46	54.00	-27.54	33.69	-7.23	Average	100	267																																																																
2	1600.00	38.56	74.00	-35.44	45.79	-7.23	Peak	100	267																																																																
3	9375.00	40.32	54.00	-13.68	32.86	7.46	Average	100	209																																																																
4	9375.00	53.18	74.00	-20.82	45.72	7.46	Peak	100	209																																																																
5	13430.00	43.46	68.20	-24.74	37.23	6.23	Average	100	121																																																																
6	13430.00	55.43	88.20	-32.77	49.20	6.23	Peak	100	121																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

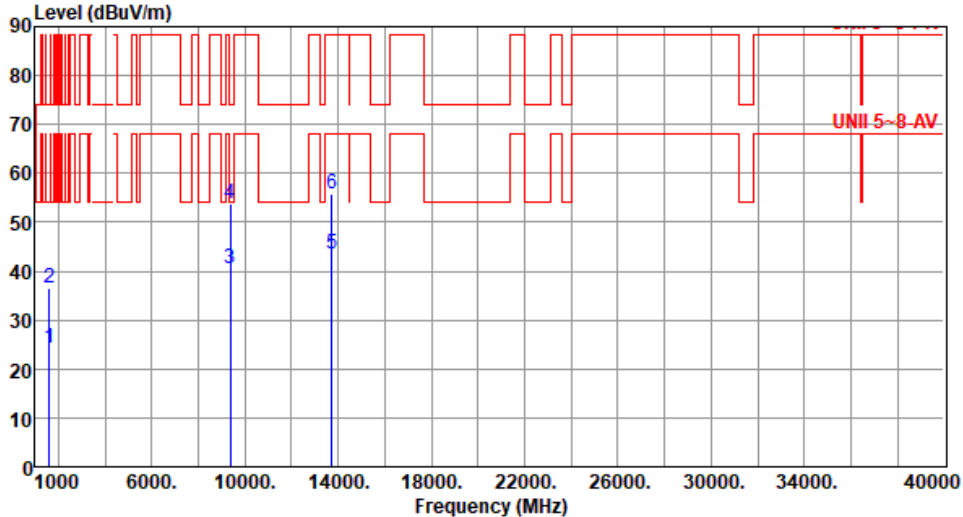

Modulation	11a	Test Freq. (MHz)	6855																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>24.40</td><td>54.00</td><td>-29.60</td><td>31.63</td><td>-7.23</td><td>Average</td><td>100</td><td>133</td></tr><tr><td>2</td><td>1600.00</td><td>36.55</td><td>74.00</td><td>-37.45</td><td>43.78</td><td>-7.23</td><td>Peak</td><td>100</td><td>133</td></tr><tr><td>3</td><td>9375.00</td><td>40.58</td><td>54.00</td><td>-13.42</td><td>33.12</td><td>7.46</td><td>Average</td><td>100</td><td>167</td></tr><tr><td>4</td><td>9375.00</td><td>53.71</td><td>74.00</td><td>-20.29</td><td>46.25</td><td>7.46</td><td>Peak</td><td>100</td><td>167</td></tr><tr><td>5</td><td>13710.00</td><td>43.42</td><td>68.20</td><td>-24.78</td><td>37.15</td><td>6.27</td><td>Average</td><td>100</td><td>157</td></tr><tr><td>6</td><td>13710.00</td><td>55.76</td><td>88.20</td><td>-32.44</td><td>49.49</td><td>6.27</td><td>Peak</td><td>100</td><td>157</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.40	54.00	-29.60	31.63	-7.23	Average	100	133	2	1600.00	36.55	74.00	-37.45	43.78	-7.23	Peak	100	133	3	9375.00	40.58	54.00	-13.42	33.12	7.46	Average	100	167	4	9375.00	53.71	74.00	-20.29	46.25	7.46	Peak	100	167	5	13710.00	43.42	68.20	-24.78	37.15	6.27	Average	100	157	6	13710.00	55.76	88.20	-32.44	49.49	6.27	Peak	100	157
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.40	54.00	-29.60	31.63	-7.23	Average	100	133																																																																
2	1600.00	36.55	74.00	-37.45	43.78	-7.23	Peak	100	133																																																																
3	9375.00	40.58	54.00	-13.42	33.12	7.46	Average	100	167																																																																
4	9375.00	53.71	74.00	-20.29	46.25	7.46	Peak	100	167																																																																
5	13710.00	43.42	68.20	-24.78	37.15	6.27	Average	100	157																																																																
6	13710.00	55.76	88.20	-32.44	49.49	6.27	Peak	100	157																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

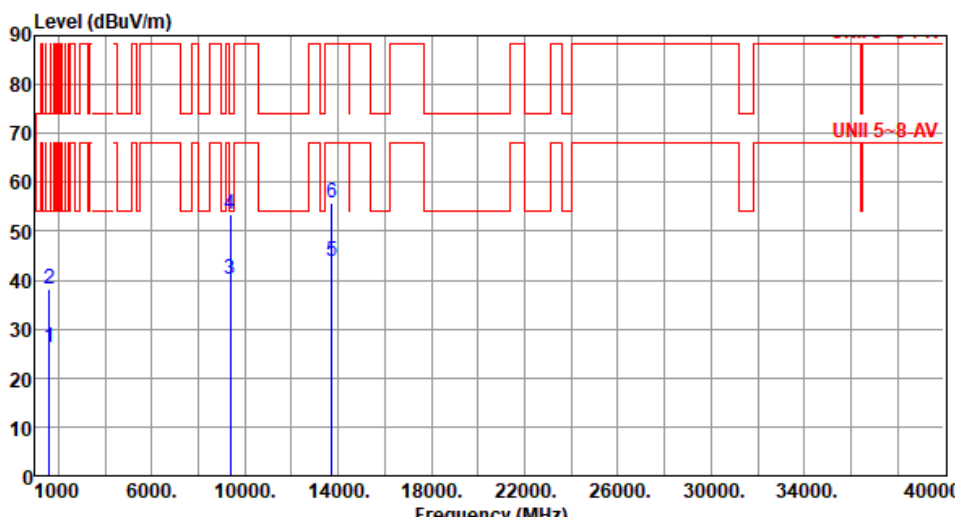

Modulation	11a	Test Freq. (MHz)	6855
Polarization	Vertical		
Test By :Allen Lee Temperature(°C):25 Humidity(%):62			
Level (dBUV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB dBuV dB/m cm Table deg 11600.0026.4054.00-27.6033.63-7.23Average100253 21600.0038.3574.00-35.6545.58-7.23Peak100253 39375.0040.2154.00-13.7932.757.46Average100201 49375.0053.3474.00-20.6645.887.46Peak100201 513710.0043.9168.20-24.2937.646.27Average100165 613710.0055.8688.20-32.3449.596.27Peak100165 Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).			




Modulation	11a	Test Freq. (MHz)	6875																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>24.39</td><td>54.00</td><td>-29.61</td><td>31.62</td><td>-7.23</td><td>Average</td><td>100</td><td>127</td></tr><tr><td>2</td><td>1600.00</td><td>36.32</td><td>74.00</td><td>-37.68</td><td>43.55</td><td>-7.23</td><td>Peak</td><td>100</td><td>127</td></tr><tr><td>3</td><td>9375.00</td><td>40.82</td><td>54.00</td><td>-13.18</td><td>33.36</td><td>7.46</td><td>Average</td><td>100</td><td>169</td></tr><tr><td>4</td><td>9375.00</td><td>53.81</td><td>74.00</td><td>-20.19</td><td>46.35</td><td>7.46</td><td>Peak</td><td>100</td><td>169</td></tr><tr><td>5</td><td>13750.00</td><td>43.94</td><td>68.20</td><td>-24.26</td><td>37.69</td><td>6.25</td><td>Average</td><td>100</td><td>185</td></tr><tr><td>6</td><td>13750.00</td><td>55.96</td><td>88.20</td><td>-32.24</td><td>49.71</td><td>6.25</td><td>Peak</td><td>100</td><td>185</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.39	54.00	-29.61	31.62	-7.23	Average	100	127	2	1600.00	36.32	74.00	-37.68	43.55	-7.23	Peak	100	127	3	9375.00	40.82	54.00	-13.18	33.36	7.46	Average	100	169	4	9375.00	53.81	74.00	-20.19	46.35	7.46	Peak	100	169	5	13750.00	43.94	68.20	-24.26	37.69	6.25	Average	100	185	6	13750.00	55.96	88.20	-32.24	49.71	6.25	Peak	100	185
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.39	54.00	-29.61	31.62	-7.23	Average	100	127																																																																
2	1600.00	36.32	74.00	-37.68	43.55	-7.23	Peak	100	127																																																																
3	9375.00	40.82	54.00	-13.18	33.36	7.46	Average	100	169																																																																
4	9375.00	53.81	74.00	-20.19	46.35	7.46	Peak	100	169																																																																
5	13750.00	43.94	68.20	-24.26	37.69	6.25	Average	100	185																																																																
6	13750.00	55.96	88.20	-32.24	49.71	6.25	Peak	100	185																																																																



Modulation	11a	Test Freq. (MHz)	6875																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>26.45</td><td>54.00</td><td>-27.55</td><td>33.68</td><td>-7.23</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1600.00</td><td>38.46</td><td>74.00</td><td>-35.54</td><td>45.69</td><td>-7.23</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>9375.00</td><td>40.14</td><td>54.00</td><td>-13.86</td><td>32.68</td><td>7.46</td><td>Average</td><td>100</td><td>203</td></tr><tr><td>4</td><td>9375.00</td><td>53.45</td><td>74.00</td><td>-20.55</td><td>45.99</td><td>7.46</td><td>Peak</td><td>100</td><td>203</td></tr><tr><td>5</td><td>13750.00</td><td>43.50</td><td>68.20</td><td>-24.70</td><td>37.25</td><td>6.25</td><td>Average</td><td>100</td><td>221</td></tr><tr><td>6</td><td>13750.00</td><td>55.35</td><td>88.20</td><td>-32.85</td><td>49.10</td><td>6.25</td><td>Peak</td><td>100</td><td>221</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.45	54.00	-27.55	33.68	-7.23	Average	100	251	2	1600.00	38.46	74.00	-35.54	45.69	-7.23	Peak	100	251	3	9375.00	40.14	54.00	-13.86	32.68	7.46	Average	100	203	4	9375.00	53.45	74.00	-20.55	45.99	7.46	Peak	100	203	5	13750.00	43.50	68.20	-24.70	37.25	6.25	Average	100	221	6	13750.00	55.35	88.20	-32.85	49.10	6.25	Peak	100	221
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	26.45	54.00	-27.55	33.68	-7.23	Average	100	251																																																																
2	1600.00	38.46	74.00	-35.54	45.69	-7.23	Peak	100	251																																																																
3	9375.00	40.14	54.00	-13.86	32.68	7.46	Average	100	203																																																																
4	9375.00	53.45	74.00	-20.55	45.99	7.46	Peak	100	203																																																																
5	13750.00	43.50	68.20	-24.70	37.25	6.25	Average	100	221																																																																
6	13750.00	55.35	88.20	-32.85	49.10	6.25	Peak	100	221																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

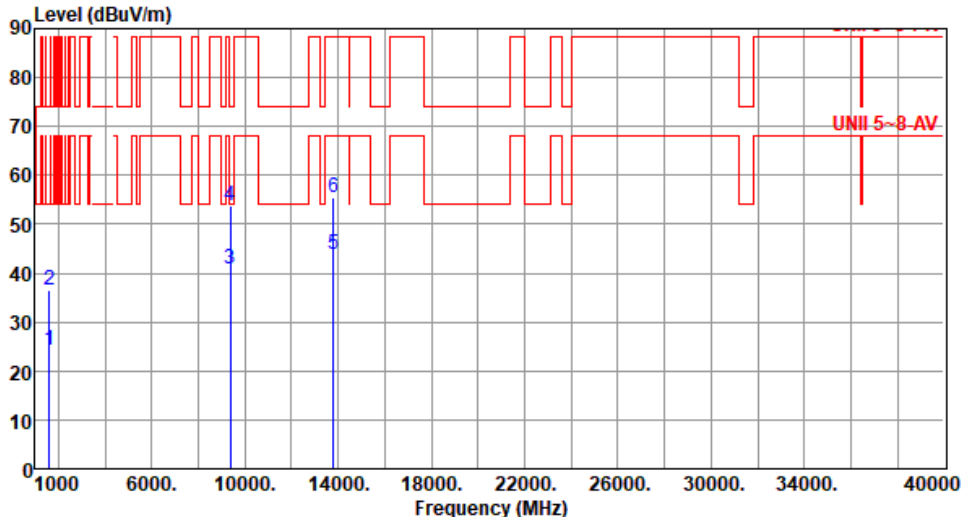

Modulation	11a	Test Freq. (MHz)	6895																																																												
Polarization	Horizontal																																																														
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																															
Level (dBUV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dB reading dB/m High Table dBuV/m dB dBuV dB dBuV cm deg <table><tr><td>1</td><td>1600.00</td><td>24.25</td><td>54.00</td><td>-29.75</td><td>31.48</td><td>-7.23</td><td>Average</td><td>100</td><td>128</td></tr><tr><td>2</td><td>1600.00</td><td>36.46</td><td>74.00</td><td>-37.54</td><td>43.69</td><td>-7.23</td><td>Peak</td><td>100</td><td>128</td></tr><tr><td>3</td><td>9375.00</td><td>40.70</td><td>54.00</td><td>-13.30</td><td>33.24</td><td>7.46</td><td>Average</td><td>100</td><td>154</td></tr><tr><td>4</td><td>9375.00</td><td>53.73</td><td>74.00</td><td>-20.27</td><td>46.27</td><td>7.46</td><td>Peak</td><td>100</td><td>154</td></tr><tr><td>5</td><td>13790.00</td><td>43.95</td><td>68.20</td><td>-24.25</td><td>37.64</td><td>6.31</td><td>Average</td><td>100</td><td>249</td></tr><tr><td>6</td><td>13790.00</td><td>55.55</td><td>88.20</td><td>-32.65</td><td>49.24</td><td>6.31</td><td>Peak</td><td>100</td><td>249</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).				1	1600.00	24.25	54.00	-29.75	31.48	-7.23	Average	100	128	2	1600.00	36.46	74.00	-37.54	43.69	-7.23	Peak	100	128	3	9375.00	40.70	54.00	-13.30	33.24	7.46	Average	100	154	4	9375.00	53.73	74.00	-20.27	46.27	7.46	Peak	100	154	5	13790.00	43.95	68.20	-24.25	37.64	6.31	Average	100	249	6	13790.00	55.55	88.20	-32.65	49.24	6.31	Peak	100	249
1	1600.00	24.25	54.00	-29.75	31.48	-7.23	Average	100	128																																																						
2	1600.00	36.46	74.00	-37.54	43.69	-7.23	Peak	100	128																																																						
3	9375.00	40.70	54.00	-13.30	33.24	7.46	Average	100	154																																																						
4	9375.00	53.73	74.00	-20.27	46.27	7.46	Peak	100	154																																																						
5	13790.00	43.95	68.20	-24.25	37.64	6.31	Average	100	249																																																						
6	13790.00	55.55	88.20	-32.65	49.24	6.31	Peak	100	249																																																						



Modulation	11a	Test Freq. (MHz)	6895
Polarization	Vertical		
Test By :Allen Lee Temperature(°C):25 Humidity(%):62			
Level (dBuV/m)			



Modulation	11a	Test Freq. (MHz)	7015																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>24.44</td><td>54.00</td><td>-29.56</td><td>31.67</td><td>-7.23</td><td>Average</td><td>100</td><td>127</td></tr><tr><td>2</td><td>1600.00</td><td>36.36</td><td>74.00</td><td>-37.64</td><td>43.59</td><td>-7.23</td><td>Peak</td><td>100</td><td>127</td></tr><tr><td>3</td><td>9375.00</td><td>40.80</td><td>54.00</td><td>-13.20</td><td>33.34</td><td>7.46</td><td>Average</td><td>100</td><td>154</td></tr><tr><td>4</td><td>9375.00</td><td>53.81</td><td>74.00</td><td>-20.19</td><td>46.35</td><td>7.46</td><td>Peak</td><td>100</td><td>154</td></tr><tr><td>5</td><td>14030.00</td><td>43.74</td><td>68.20</td><td>-24.46</td><td>36.92</td><td>6.82</td><td>Average</td><td>100</td><td>174</td></tr><tr><td>6</td><td>14030.00</td><td>57.31</td><td>88.20</td><td>-30.89</td><td>50.49</td><td>6.82</td><td>Peak</td><td>100</td><td>174</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.44	54.00	-29.56	31.67	-7.23	Average	100	127	2	1600.00	36.36	74.00	-37.64	43.59	-7.23	Peak	100	127	3	9375.00	40.80	54.00	-13.20	33.34	7.46	Average	100	154	4	9375.00	53.81	74.00	-20.19	46.35	7.46	Peak	100	154	5	14030.00	43.74	68.20	-24.46	36.92	6.82	Average	100	174	6	14030.00	57.31	88.20	-30.89	50.49	6.82	Peak	100	174
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.44	54.00	-29.56	31.67	-7.23	Average	100	127																																																																
2	1600.00	36.36	74.00	-37.64	43.59	-7.23	Peak	100	127																																																																
3	9375.00	40.80	54.00	-13.20	33.34	7.46	Average	100	154																																																																
4	9375.00	53.81	74.00	-20.19	46.35	7.46	Peak	100	154																																																																
5	14030.00	43.74	68.20	-24.46	36.92	6.82	Average	100	174																																																																
6	14030.00	57.31	88.20	-30.89	50.49	6.82	Peak	100	174																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	11a	Test Freq. (MHz)	7015																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>26.39</td><td>54.00</td><td>-27.61</td><td>33.62</td><td>-7.23</td><td>Average</td><td>100</td><td>246</td></tr><tr><td>2</td><td>1600.00</td><td>38.50</td><td>74.00</td><td>-35.50</td><td>45.73</td><td>-7.23</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>3</td><td>9375.00</td><td>40.19</td><td>54.00</td><td>-13.81</td><td>32.73</td><td>7.46</td><td>Average</td><td>100</td><td>197</td></tr><tr><td>4</td><td>9375.00</td><td>53.24</td><td>74.00</td><td>-20.76</td><td>45.78</td><td>7.46</td><td>Peak</td><td>100</td><td>197</td></tr><tr><td>5</td><td>14030.00</td><td>43.57</td><td>68.20</td><td>-24.63</td><td>36.75</td><td>6.82</td><td>Average</td><td>100</td><td>165</td></tr><tr><td>6</td><td>14030.00</td><td>57.67</td><td>88.20</td><td>-30.53</td><td>50.85</td><td>6.82</td><td>Peak</td><td>100</td><td>165</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.39	54.00	-27.61	33.62	-7.23	Average	100	246	2	1600.00	38.50	74.00	-35.50	45.73	-7.23	Peak	100	246	3	9375.00	40.19	54.00	-13.81	32.73	7.46	Average	100	197	4	9375.00	53.24	74.00	-20.76	45.78	7.46	Peak	100	197	5	14030.00	43.57	68.20	-24.63	36.75	6.82	Average	100	165	6	14030.00	57.67	88.20	-30.53	50.85	6.82	Peak	100	165
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	26.39	54.00	-27.61	33.62	-7.23	Average	100	246																																																																
2	1600.00	38.50	74.00	-35.50	45.73	-7.23	Peak	100	246																																																																
3	9375.00	40.19	54.00	-13.81	32.73	7.46	Average	100	197																																																																
4	9375.00	53.24	74.00	-20.76	45.78	7.46	Peak	100	197																																																																
5	14030.00	43.57	68.20	-24.63	36.75	6.82	Average	100	165																																																																
6	14030.00	57.67	88.20	-30.53	50.85	6.82	Peak	100	165																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	11a	Test Freq. (MHz)	7095																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>24.45</td><td>54.00</td><td>-29.55</td><td>31.68</td><td>-7.23</td><td>Average</td><td>100</td><td>123</td></tr><tr><td>2</td><td>1600.00</td><td>36.46</td><td>74.00</td><td>-37.54</td><td>43.69</td><td>-7.23</td><td>Peak</td><td>100</td><td>123</td></tr><tr><td>3</td><td>7125.00</td><td>47.84</td><td>68.20</td><td>-20.36</td><td>42.66</td><td>5.18</td><td>Average</td><td>253</td><td>245</td></tr><tr><td>4</td><td>7125.00</td><td>59.77</td><td>88.20</td><td>-28.43</td><td>54.59</td><td>5.18</td><td>Peak</td><td>253</td><td>245</td></tr><tr><td>5</td><td>14190.00</td><td>44.21</td><td>68.20</td><td>-23.99</td><td>36.97</td><td>7.24</td><td>Average</td><td>100</td><td>99</td></tr><tr><td>6</td><td>14190.00</td><td>58.47</td><td>88.20</td><td>-29.73</td><td>51.23</td><td>7.24</td><td>Peak</td><td>100</td><td>99</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.45	54.00	-29.55	31.68	-7.23	Average	100	123	2	1600.00	36.46	74.00	-37.54	43.69	-7.23	Peak	100	123	3	7125.00	47.84	68.20	-20.36	42.66	5.18	Average	253	245	4	7125.00	59.77	88.20	-28.43	54.59	5.18	Peak	253	245	5	14190.00	44.21	68.20	-23.99	36.97	7.24	Average	100	99	6	14190.00	58.47	88.20	-29.73	51.23	7.24	Peak	100	99
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.45	54.00	-29.55	31.68	-7.23	Average	100	123																																																																
2	1600.00	36.46	74.00	-37.54	43.69	-7.23	Peak	100	123																																																																
3	7125.00	47.84	68.20	-20.36	42.66	5.18	Average	253	245																																																																
4	7125.00	59.77	88.20	-28.43	54.59	5.18	Peak	253	245																																																																
5	14190.00	44.21	68.20	-23.99	36.97	7.24	Average	100	99																																																																
6	14190.00	58.47	88.20	-29.73	51.23	7.24	Peak	100	99																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	11a	Test Freq. (MHz)	7095
Polarization	Vertical		
Test By :Allen Lee Temperature(°C):25 Humidity(%):62			
Level (dBuV/m)			




Unwanted Emissions (Above 1GHz) for be EHT20

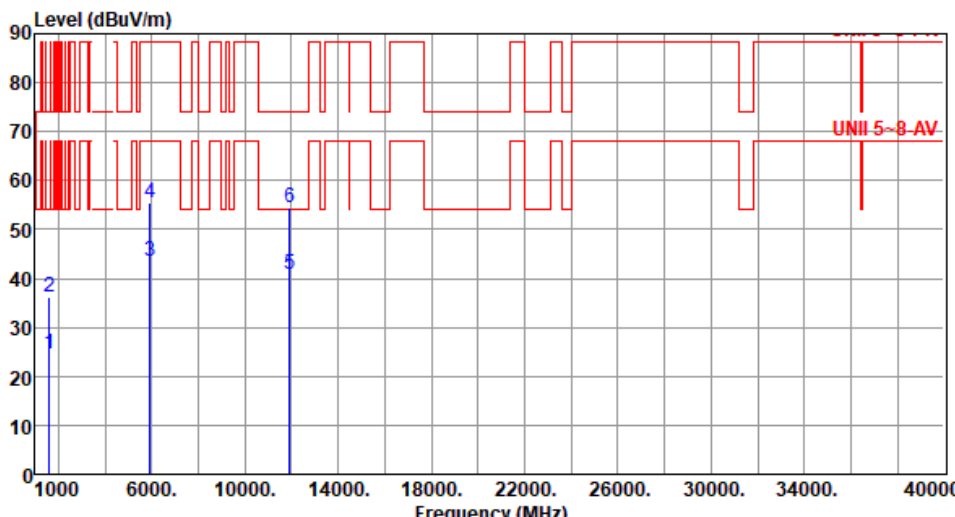Modulation	be EHT20	Test Freq. (MHz)	5955						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	24.45	54.00	-29.55	31.68	-7.23	Average	100	133
2	1600.00	36.35	74.00	-37.65	43.58	-7.23	Peak	100	133
3	5925.00	43.61	68.20	-24.59	42.44	1.17	Average	163	85
4	5925.00	55.46	88.20	-32.74	54.29	1.17	Peak	163	85
5	11910.00	40.78	54.00	-13.22	34.35	6.43	Average	100	59
6	11910.00	54.45	74.00	-19.55	48.02	6.43	Peak	100	59

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

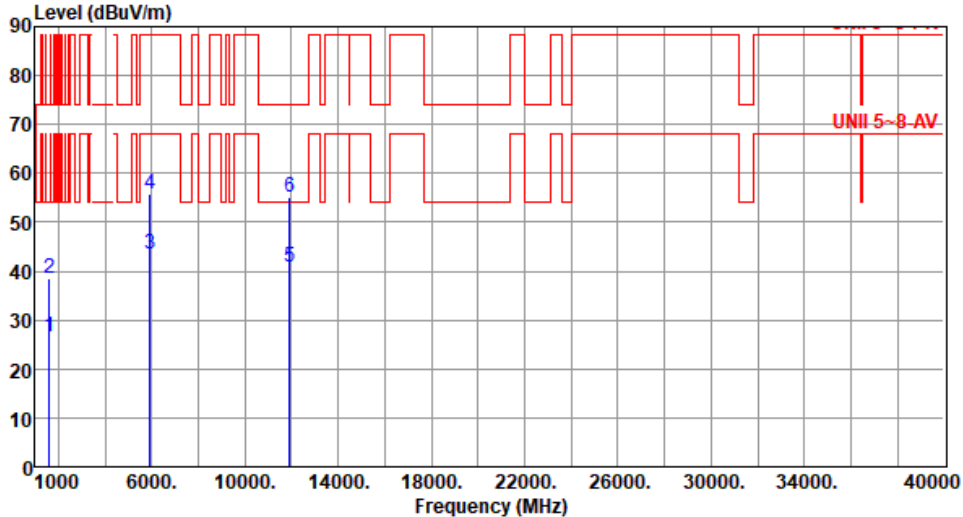

Modulation	be EHT20	Test Freq. (MHz)	5955																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>26.41</td><td>54.00</td><td>-27.59</td><td>33.64</td><td>-7.23</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1600.00</td><td>38.43</td><td>74.00</td><td>-35.57</td><td>45.66</td><td>-7.23</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>5925.00</td><td>43.57</td><td>68.20</td><td>-24.63</td><td>42.40</td><td>1.17</td><td>Average</td><td>183</td><td>239</td></tr><tr><td>4</td><td>5925.00</td><td>55.81</td><td>88.20</td><td>-32.39</td><td>54.64</td><td>1.17</td><td>Peak</td><td>183</td><td>239</td></tr><tr><td>5</td><td>11910.00</td><td>40.71</td><td>54.00</td><td>-13.29</td><td>34.28</td><td>6.43</td><td>Average</td><td>100</td><td>32</td></tr><tr><td>6</td><td>11910.00</td><td>55.11</td><td>74.00</td><td>-18.89</td><td>48.68</td><td>6.43</td><td>Peak</td><td>100</td><td>32</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.41	54.00	-27.59	33.64	-7.23	Average	100	251	2	1600.00	38.43	74.00	-35.57	45.66	-7.23	Peak	100	251	3	5925.00	43.57	68.20	-24.63	42.40	1.17	Average	183	239	4	5925.00	55.81	88.20	-32.39	54.64	1.17	Peak	183	239	5	11910.00	40.71	54.00	-13.29	34.28	6.43	Average	100	32	6	11910.00	55.11	74.00	-18.89	48.68	6.43	Peak	100	32
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	26.41	54.00	-27.59	33.64	-7.23	Average	100	251																																																																
2	1600.00	38.43	74.00	-35.57	45.66	-7.23	Peak	100	251																																																																
3	5925.00	43.57	68.20	-24.63	42.40	1.17	Average	183	239																																																																
4	5925.00	55.81	88.20	-32.39	54.64	1.17	Peak	183	239																																																																
5	11910.00	40.71	54.00	-13.29	34.28	6.43	Average	100	32																																																																
6	11910.00	55.11	74.00	-18.89	48.68	6.43	Peak	100	32																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT20	Test Freq. (MHz)	6175																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>24.34</td><td>54.00</td><td>-29.66</td><td>31.57</td><td>-7.23</td><td>Average</td><td>100</td><td>128</td></tr><tr><td>2</td><td>1600.00</td><td>36.41</td><td>74.00</td><td>-37.59</td><td>43.64</td><td>-7.23</td><td>Peak</td><td>100</td><td>128</td></tr><tr><td>3</td><td>9375.00</td><td>40.67</td><td>54.00</td><td>-13.33</td><td>33.21</td><td>7.46</td><td>Average</td><td>100</td><td>167</td></tr><tr><td>4</td><td>9375.00</td><td>53.73</td><td>74.00</td><td>-20.27</td><td>46.27</td><td>7.46</td><td>Peak</td><td>100</td><td>167</td></tr><tr><td>5</td><td>12350.00</td><td>41.67</td><td>54.00</td><td>-12.33</td><td>34.57</td><td>7.10</td><td>Average</td><td>100</td><td>125</td></tr><tr><td>6</td><td>12350.00</td><td>54.94</td><td>74.00</td><td>-19.06</td><td>47.84</td><td>7.10</td><td>Peak</td><td>100</td><td>125</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.34	54.00	-29.66	31.57	-7.23	Average	100	128	2	1600.00	36.41	74.00	-37.59	43.64	-7.23	Peak	100	128	3	9375.00	40.67	54.00	-13.33	33.21	7.46	Average	100	167	4	9375.00	53.73	74.00	-20.27	46.27	7.46	Peak	100	167	5	12350.00	41.67	54.00	-12.33	34.57	7.10	Average	100	125	6	12350.00	54.94	74.00	-19.06	47.84	7.10	Peak	100	125
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.34	54.00	-29.66	31.57	-7.23	Average	100	128																																																																
2	1600.00	36.41	74.00	-37.59	43.64	-7.23	Peak	100	128																																																																
3	9375.00	40.67	54.00	-13.33	33.21	7.46	Average	100	167																																																																
4	9375.00	53.73	74.00	-20.27	46.27	7.46	Peak	100	167																																																																
5	12350.00	41.67	54.00	-12.33	34.57	7.10	Average	100	125																																																																
6	12350.00	54.94	74.00	-19.06	47.84	7.10	Peak	100	125																																																																



Modulation	be EHT20		Test Freq. (MHz)		6175																																																																										
Polarization	Vertical																																																																														
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																															
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>26.34</td><td>54.00</td><td>-27.66</td><td>33.57</td><td>-7.23</td><td>Average</td><td>100</td><td>253</td></tr><tr><td>2</td><td>1600.00</td><td>38.28</td><td>74.00</td><td>-35.72</td><td>45.51</td><td>-7.23</td><td>Peak</td><td>100</td><td>253</td></tr><tr><td>3</td><td>9375.00</td><td>40.21</td><td>54.00</td><td>-13.79</td><td>32.75</td><td>7.46</td><td>Average</td><td>100</td><td>203</td></tr><tr><td>4</td><td>9375.00</td><td>53.14</td><td>74.00</td><td>-20.86</td><td>45.68</td><td>7.46</td><td>Peak</td><td>100</td><td>203</td></tr><tr><td>5</td><td>12350.00</td><td>41.61</td><td>54.00</td><td>-12.39</td><td>34.51</td><td>7.10</td><td>Average</td><td>100</td><td>227</td></tr><tr><td>6</td><td>12350.00</td><td>55.67</td><td>74.00</td><td>-18.33</td><td>48.57</td><td>7.10</td><td>Peak</td><td>100</td><td>227</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.34	54.00	-27.66	33.57	-7.23	Average	100	253	2	1600.00	38.28	74.00	-35.72	45.51	-7.23	Peak	100	253	3	9375.00	40.21	54.00	-13.79	32.75	7.46	Average	100	203	4	9375.00	53.14	74.00	-20.86	45.68	7.46	Peak	100	203	5	12350.00	41.61	54.00	-12.39	34.51	7.10	Average	100	227	6	12350.00	55.67	74.00	-18.33	48.57	7.10	Peak	100	227
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1600.00	26.34	54.00	-27.66	33.57	-7.23	Average	100	253																																																																						
2	1600.00	38.28	74.00	-35.72	45.51	-7.23	Peak	100	253																																																																						
3	9375.00	40.21	54.00	-13.79	32.75	7.46	Average	100	203																																																																						
4	9375.00	53.14	74.00	-20.86	45.68	7.46	Peak	100	203																																																																						
5	12350.00	41.61	54.00	-12.39	34.51	7.10	Average	100	227																																																																						
6	12350.00	55.67	74.00	-18.33	48.57	7.10	Peak	100	227																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

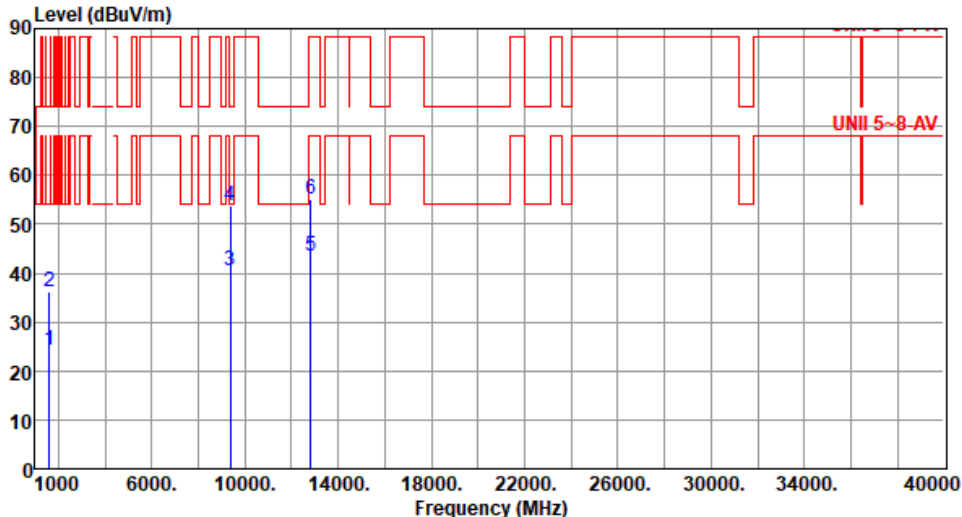

Modulation	be EHT20		Test Freq. (MHz)		6415																																																																										
Polarization	Horizontal																																																																														
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																															
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>24.31</td><td>54.00</td><td>-29.69</td><td>31.54</td><td>-7.23</td><td>Average</td><td>100</td><td>128</td></tr><tr><td>2</td><td>1600.00</td><td>36.26</td><td>74.00</td><td>-37.74</td><td>43.49</td><td>-7.23</td><td>Peak</td><td>100</td><td>128</td></tr><tr><td>3</td><td>9375.00</td><td>40.67</td><td>54.00</td><td>-13.33</td><td>33.21</td><td>7.46</td><td>Average</td><td>100</td><td>166</td></tr><tr><td>4</td><td>9375.00</td><td>53.74</td><td>74.00</td><td>-20.26</td><td>46.28</td><td>7.46</td><td>Peak</td><td>100</td><td>166</td></tr><tr><td>5</td><td>12830.00</td><td>43.35</td><td>68.20</td><td>-24.85</td><td>36.52</td><td>6.83</td><td>Average</td><td>100</td><td>257</td></tr><tr><td>6</td><td>12830.00</td><td>55.17</td><td>88.20</td><td>-33.03</td><td>48.34</td><td>6.83</td><td>Peak</td><td>100</td><td>257</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.31	54.00	-29.69	31.54	-7.23	Average	100	128	2	1600.00	36.26	74.00	-37.74	43.49	-7.23	Peak	100	128	3	9375.00	40.67	54.00	-13.33	33.21	7.46	Average	100	166	4	9375.00	53.74	74.00	-20.26	46.28	7.46	Peak	100	166	5	12830.00	43.35	68.20	-24.85	36.52	6.83	Average	100	257	6	12830.00	55.17	88.20	-33.03	48.34	6.83	Peak	100	257
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1600.00	24.31	54.00	-29.69	31.54	-7.23	Average	100	128																																																																						
2	1600.00	36.26	74.00	-37.74	43.49	-7.23	Peak	100	128																																																																						
3	9375.00	40.67	54.00	-13.33	33.21	7.46	Average	100	166																																																																						
4	9375.00	53.74	74.00	-20.26	46.28	7.46	Peak	100	166																																																																						
5	12830.00	43.35	68.20	-24.85	36.52	6.83	Average	100	257																																																																						
6	12830.00	55.17	88.20	-33.03	48.34	6.83	Peak	100	257																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															




Modulation	be EHT20	Test Freq. (MHz)	6415						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63									
Level (dBUV/m) UNII 5~8-AV Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	26.04	54.00	-27.96	33.27	-7.23	Average	100	162
2	1600.00	39.28	74.00	-34.72	46.51	-7.23	Peak	100	162
3	9375.00	40.34	54.00	-13.66	32.88	7.46	Average	100	212
4	9375.00	53.30	74.00	-20.70	45.84	7.46	Peak	100	212
5	12830.00	43.22	68.20	-24.98	36.39	6.83	Average	100	172
6	12830.00	55.35	88.20	-32.85	48.52	6.83	Peak	100	172

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Modulation	be EHT20	Test Freq. (MHz)	6435																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>24.34</td><td>54.00</td><td>-29.66</td><td>31.57</td><td>-7.23</td><td>Average</td><td>100</td><td>128</td></tr><tr><td>2</td><td>1600.00</td><td>36.43</td><td>74.00</td><td>-37.57</td><td>43.66</td><td>-7.23</td><td>Peak</td><td>100</td><td>128</td></tr><tr><td>3</td><td>9375.00</td><td>40.72</td><td>54.00</td><td>-13.28</td><td>33.26</td><td>7.46</td><td>Average</td><td>100</td><td>162</td></tr><tr><td>4</td><td>9375.00</td><td>53.77</td><td>74.00</td><td>-20.23</td><td>46.31</td><td>7.46</td><td>Peak</td><td>100</td><td>162</td></tr><tr><td>5</td><td>12870.00</td><td>42.46</td><td>68.20</td><td>-25.74</td><td>35.68</td><td>6.78</td><td>Average</td><td>100</td><td>223</td></tr><tr><td>6</td><td>12870.00</td><td>55.24</td><td>88.20</td><td>-32.96</td><td>48.46</td><td>6.78</td><td>Peak</td><td>100</td><td>223</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.34	54.00	-29.66	31.57	-7.23	Average	100	128	2	1600.00	36.43	74.00	-37.57	43.66	-7.23	Peak	100	128	3	9375.00	40.72	54.00	-13.28	33.26	7.46	Average	100	162	4	9375.00	53.77	74.00	-20.23	46.31	7.46	Peak	100	162	5	12870.00	42.46	68.20	-25.74	35.68	6.78	Average	100	223	6	12870.00	55.24	88.20	-32.96	48.46	6.78	Peak	100	223
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.34	54.00	-29.66	31.57	-7.23	Average	100	128																																																																
2	1600.00	36.43	74.00	-37.57	43.66	-7.23	Peak	100	128																																																																
3	9375.00	40.72	54.00	-13.28	33.26	7.46	Average	100	162																																																																
4	9375.00	53.77	74.00	-20.23	46.31	7.46	Peak	100	162																																																																
5	12870.00	42.46	68.20	-25.74	35.68	6.78	Average	100	223																																																																
6	12870.00	55.24	88.20	-32.96	48.46	6.78	Peak	100	223																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

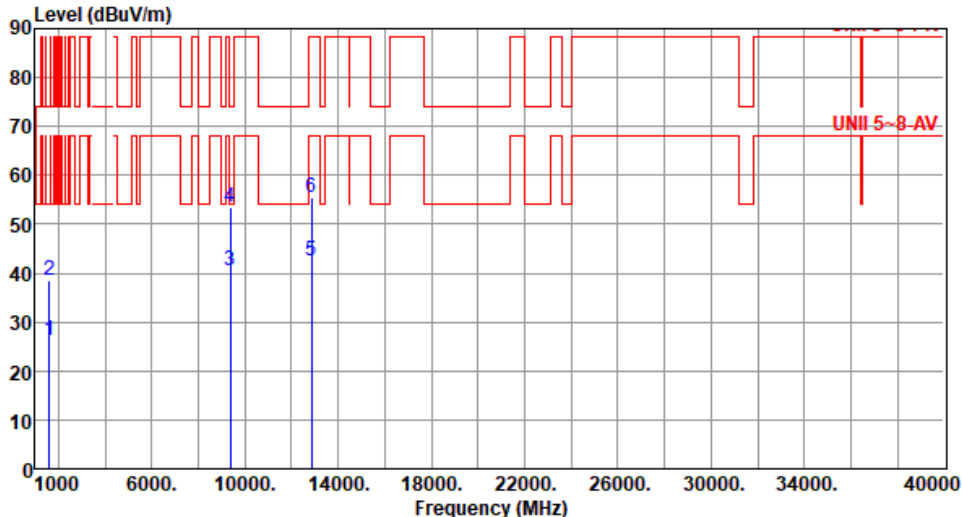


Modulation	be EHT20		Test Freq. (MHz)		6435				
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63									
									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
					dBuV			cm	deg
1	1600.00	26.34	54.00	-27.66	33.57	-7.23	Average	100	255
2	1600.00	38.41	74.00	-35.59	45.64	-7.23	Peak	100	255
3	9375.00	40.40	54.00	-13.60	32.94	7.46	Average	100	206
4	9375.00	53.40	74.00	-20.60	45.94	7.46	Peak	100	206
5	12870.00	42.37	68.20	-25.83	35.59	6.78	Average	100	128
6	12870.00	55.56	88.20	-32.64	48.78	6.78	Peak	100	128

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

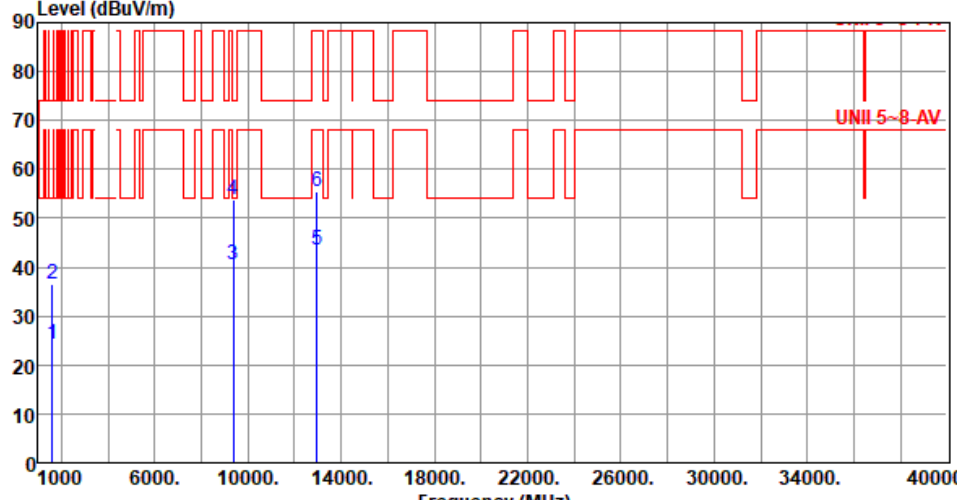

Modulation	be EHT20	Test Freq. (MHz)	6475																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>24.34</td><td>54.00</td><td>-29.66</td><td>31.57</td><td>-7.23</td><td>Average</td><td>100</td><td>123</td></tr><tr><td>2</td><td>1600.00</td><td>36.43</td><td>74.00</td><td>-37.57</td><td>43.66</td><td>-7.23</td><td>Peak</td><td>100</td><td>123</td></tr><tr><td>3</td><td>9375.00</td><td>40.67</td><td>54.00</td><td>-13.33</td><td>33.21</td><td>7.46</td><td>Average</td><td>100</td><td>162</td></tr><tr><td>4</td><td>9375.00</td><td>53.79</td><td>74.00</td><td>-20.21</td><td>46.33</td><td>7.46</td><td>Peak</td><td>100</td><td>162</td></tr><tr><td>5</td><td>12950.00</td><td>43.35</td><td>68.20</td><td>-24.85</td><td>36.68</td><td>6.67</td><td>Average</td><td>100</td><td>243</td></tr><tr><td>6</td><td>12950.00</td><td>55.35</td><td>88.20</td><td>-32.85</td><td>48.68</td><td>6.67</td><td>Peak</td><td>100</td><td>243</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.34	54.00	-29.66	31.57	-7.23	Average	100	123	2	1600.00	36.43	74.00	-37.57	43.66	-7.23	Peak	100	123	3	9375.00	40.67	54.00	-13.33	33.21	7.46	Average	100	162	4	9375.00	53.79	74.00	-20.21	46.33	7.46	Peak	100	162	5	12950.00	43.35	68.20	-24.85	36.68	6.67	Average	100	243	6	12950.00	55.35	88.20	-32.85	48.68	6.67	Peak	100	243
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.34	54.00	-29.66	31.57	-7.23	Average	100	123																																																																
2	1600.00	36.43	74.00	-37.57	43.66	-7.23	Peak	100	123																																																																
3	9375.00	40.67	54.00	-13.33	33.21	7.46	Average	100	162																																																																
4	9375.00	53.79	74.00	-20.21	46.33	7.46	Peak	100	162																																																																
5	12950.00	43.35	68.20	-24.85	36.68	6.67	Average	100	243																																																																
6	12950.00	55.35	88.20	-32.85	48.68	6.67	Peak	100	243																																																																

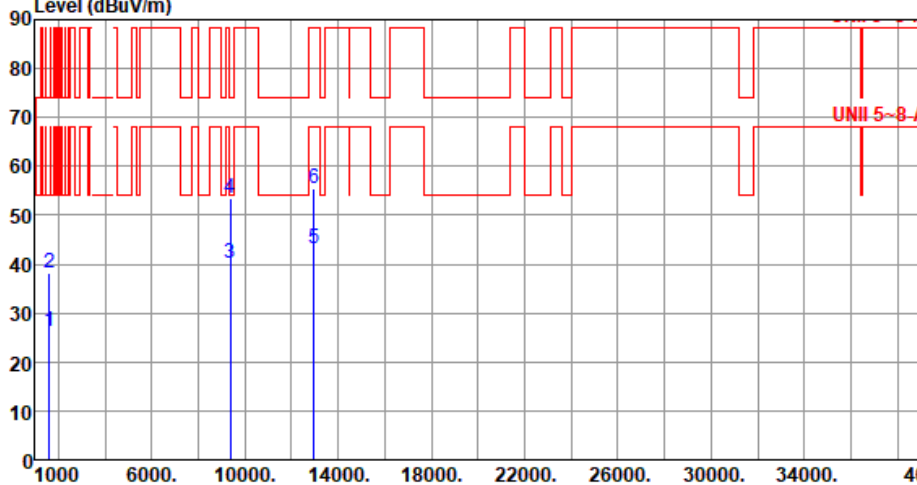


Modulation	be EHT20	Test Freq. (MHz)	6475						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	26.34	54.00	-27.66	33.57	-7.23	Average	100	255
2	1600.00	38.24	74.00	-35.76	45.47	-7.23	Peak	100	255
3	9375.00	40.25	54.00	-13.75	32.79	7.46	Average	100	205
4	9375.00	53.34	74.00	-20.66	45.88	7.46	Peak	100	205
5	12950.00	43.32	68.20	-24.88	36.65	6.67	Average	100	214
6	12950.00	55.44	88.20	-32.76	48.77	6.67	Peak	100	214

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20		Test Freq. (MHz)		6515																																																																							
Polarization	Horizontal																																																																											
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																												
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>24.35</td><td>54.00</td><td>-29.65</td><td>31.58</td><td>-7.23</td><td>Average</td><td>100</td><td>123</td></tr><tr><td>2</td><td>1600.00</td><td>36.44</td><td>74.00</td><td>-37.56</td><td>43.67</td><td>-7.23</td><td>Peak</td><td>100</td><td>123</td></tr><tr><td>3</td><td>9375.00</td><td>40.67</td><td>54.00</td><td>-13.33</td><td>33.21</td><td>7.46</td><td>Average</td><td>100</td><td>162</td></tr><tr><td>4</td><td>9375.00</td><td>53.97</td><td>74.00</td><td>-20.03</td><td>46.51</td><td>7.46</td><td>Peak</td><td>100</td><td>162</td></tr><tr><td>5</td><td>13030.00</td><td>42.71</td><td>68.20</td><td>-25.49</td><td>36.41</td><td>6.30</td><td>Average</td><td>100</td><td>205</td></tr><tr><td>6</td><td>13030.00</td><td>55.04</td><td>88.20</td><td>-33.16</td><td>48.74</td><td>6.30</td><td>Peak</td><td>100</td><td>205</td></tr></tbody></table>								Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.35	54.00	-29.65	31.58	-7.23	Average	100	123	2	1600.00	36.44	74.00	-37.56	43.67	-7.23	Peak	100	123	3	9375.00	40.67	54.00	-13.33	33.21	7.46	Average	100	162	4	9375.00	53.97	74.00	-20.03	46.51	7.46	Peak	100	162	5	13030.00	42.71	68.20	-25.49	36.41	6.30	Average	100	205	6	13030.00	55.04	88.20	-33.16	48.74	6.30	Peak	100	205
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																			
1	1600.00	24.35	54.00	-29.65	31.58	-7.23	Average	100	123																																																																			
2	1600.00	36.44	74.00	-37.56	43.67	-7.23	Peak	100	123																																																																			
3	9375.00	40.67	54.00	-13.33	33.21	7.46	Average	100	162																																																																			
4	9375.00	53.97	74.00	-20.03	46.51	7.46	Peak	100	162																																																																			
5	13030.00	42.71	68.20	-25.49	36.41	6.30	Average	100	205																																																																			
6	13030.00	55.04	88.20	-33.16	48.74	6.30	Peak	100	205																																																																			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																												

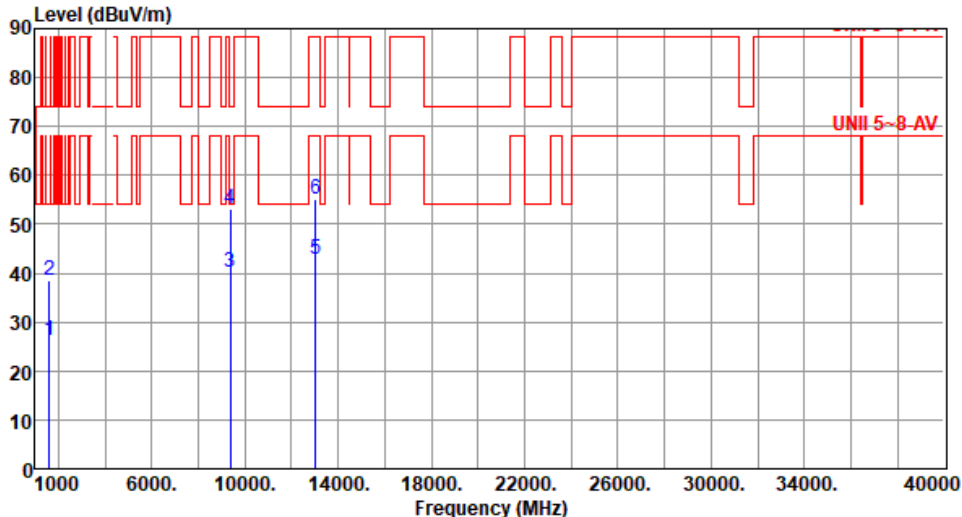

Modulation	be EHT20	Test Freq. (MHz)	6515						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	26.34	54.00	-27.66	33.57	-7.23	Average	100	257
2	1600.00	38.43	74.00	-35.57	45.66	-7.23	Peak	100	257
3	9375.00	40.21	54.00	-13.79	32.75	7.46	Average	100	205
4	9375.00	53.14	74.00	-20.86	45.68	7.46	Peak	100	205
5	13030.00	42.74	68.20	-25.46	36.44	6.30	Average	100	218
6	13030.00	55.04	88.20	-33.16	48.74	6.30	Peak	100	218

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).