




Modulation	be EHT20	Test Freq. (MHz)	6535						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	24.35	54.00	-29.65	31.58	-7.23	Average	100	127
2	1600.00	36.34	74.00	-37.66	43.57	-7.23	Peak	100	127
3	9375.00	40.61	54.00	-13.39	33.15	7.46	Average	100	162
4	9375.00	53.80	74.00	-20.20	46.34	7.46	Peak	100	162
5	13070.00	42.57	68.20	-25.63	36.44	6.13	Average	100	215
6	13070.00	54.89	88.20	-33.31	48.76	6.13	Peak	100	215
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	be EHT20	Test Freq. (MHz)	6535																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>26.34</td><td>54.00</td><td>-27.66</td><td>33.57</td><td>-7.23</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1600.00</td><td>38.45</td><td>74.00</td><td>-35.55</td><td>45.68</td><td>-7.23</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>9375.00</td><td>40.25</td><td>54.00</td><td>-13.75</td><td>32.79</td><td>7.46</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>4</td><td>9375.00</td><td>53.28</td><td>74.00</td><td>-20.72</td><td>45.82</td><td>7.46</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>5</td><td>13070.00</td><td>42.66</td><td>68.20</td><td>-25.54</td><td>36.53</td><td>6.13</td><td>Average</td><td>100</td><td>227</td></tr><tr><td>6</td><td>13070.00</td><td>54.96</td><td>88.20</td><td>-33.24</td><td>48.83</td><td>6.13</td><td>Peak</td><td>100</td><td>227</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.34	54.00	-27.66	33.57	-7.23	Average	100	251	2	1600.00	38.45	74.00	-35.55	45.68	-7.23	Peak	100	251	3	9375.00	40.25	54.00	-13.75	32.79	7.46	Average	100	208	4	9375.00	53.28	74.00	-20.72	45.82	7.46	Peak	100	208	5	13070.00	42.66	68.20	-25.54	36.53	6.13	Average	100	227	6	13070.00	54.96	88.20	-33.24	48.83	6.13	Peak	100	227
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	26.34	54.00	-27.66	33.57	-7.23	Average	100	251																																																																
2	1600.00	38.45	74.00	-35.55	45.68	-7.23	Peak	100	251																																																																
3	9375.00	40.25	54.00	-13.75	32.79	7.46	Average	100	208																																																																
4	9375.00	53.28	74.00	-20.72	45.82	7.46	Peak	100	208																																																																
5	13070.00	42.66	68.20	-25.54	36.53	6.13	Average	100	227																																																																
6	13070.00	54.96	88.20	-33.24	48.83	6.13	Peak	100	227																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

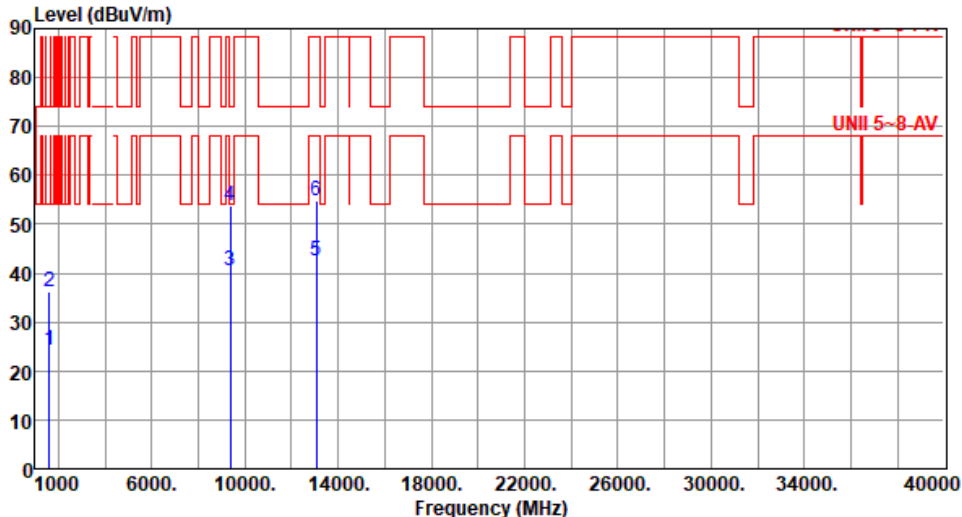


Modulation	be EHT20	Test Freq. (MHz)	6715
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):23 Humidity(%):63			
Level (dBUV/m) <			



Modulation	be EHT20	Test Freq. (MHz)	6715						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	26.34	54.00	-27.66	33.57	-7.23	Average	100	257
2	1600.00	38.41	74.00	-35.59	45.64	-7.23	Peak	100	257
3	9375.00	40.21	54.00	-13.79	32.75	7.46	Average	100	206
4	9375.00	53.14	74.00	-20.86	45.68	7.46	Peak	100	206
5	13430.00	43.34	68.20	-24.86	37.11	6.23	Average	100	118
6	13430.00	55.26	88.20	-32.94	49.03	6.23	Peak	100	118

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

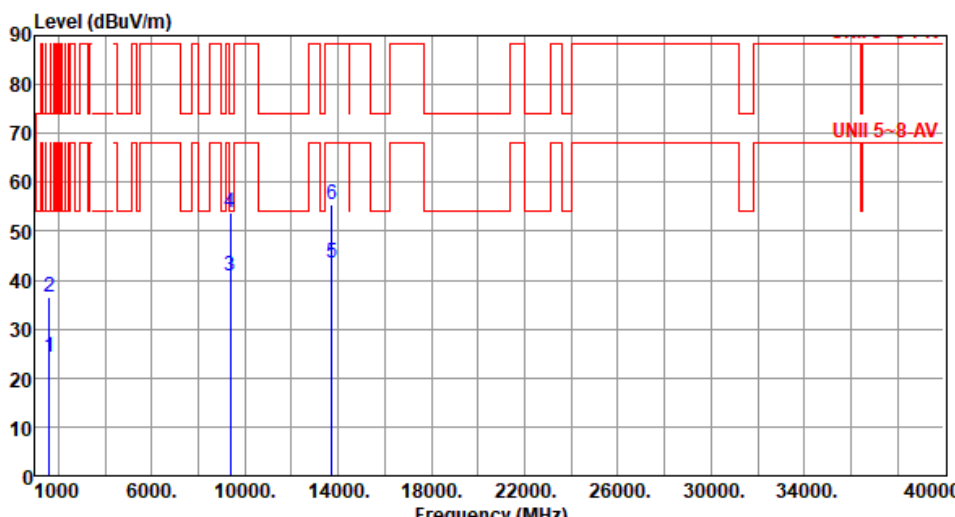

Modulation	be EHT20	Test Freq. (MHz)	6855																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																									
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>24.36</td><td>54.00</td><td>-29.64</td><td>31.59</td><td>-7.23</td><td>Average</td><td>100</td><td>126</td></tr><tr><td>2</td><td>1600.00</td><td>36.43</td><td>74.00</td><td>-37.57</td><td>43.66</td><td>-7.23</td><td>Peak</td><td>100</td><td>126</td></tr><tr><td>3</td><td>9375.00</td><td>40.72</td><td>54.00</td><td>-13.28</td><td>33.26</td><td>7.46</td><td>Average</td><td>100</td><td>162</td></tr><tr><td>4</td><td>9375.00</td><td>53.74</td><td>74.00</td><td>-20.26</td><td>46.28</td><td>7.46</td><td>Peak</td><td>100</td><td>162</td></tr><tr><td>5</td><td>13710.00</td><td>43.51</td><td>68.20</td><td>-24.69</td><td>37.24</td><td>6.27</td><td>Average</td><td>100</td><td>166</td></tr><tr><td>6</td><td>13710.00</td><td>55.62</td><td>88.20</td><td>-32.58</td><td>49.35</td><td>6.27</td><td>Peak</td><td>100</td><td>166</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.36	54.00	-29.64	31.59	-7.23	Average	100	126	2	1600.00	36.43	74.00	-37.57	43.66	-7.23	Peak	100	126	3	9375.00	40.72	54.00	-13.28	33.26	7.46	Average	100	162	4	9375.00	53.74	74.00	-20.26	46.28	7.46	Peak	100	162	5	13710.00	43.51	68.20	-24.69	37.24	6.27	Average	100	166	6	13710.00	55.62	88.20	-32.58	49.35	6.27	Peak	100	166
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.36	54.00	-29.64	31.59	-7.23	Average	100	126																																																																
2	1600.00	36.43	74.00	-37.57	43.66	-7.23	Peak	100	126																																																																
3	9375.00	40.72	54.00	-13.28	33.26	7.46	Average	100	162																																																																
4	9375.00	53.74	74.00	-20.26	46.28	7.46	Peak	100	162																																																																
5	13710.00	43.51	68.20	-24.69	37.24	6.27	Average	100	166																																																																
6	13710.00	55.62	88.20	-32.58	49.35	6.27	Peak	100	166																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT20	Test Freq. (MHz)	6855																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																									
Level (dBuV/m) UNII 5~8-AV <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>26.35</td><td>54.00</td><td>-27.65</td><td>33.58</td><td>-7.23</td><td>Average</td><td>100</td><td>248</td></tr><tr><td>2</td><td>1600.00</td><td>38.23</td><td>74.00</td><td>-35.77</td><td>45.46</td><td>-7.23</td><td>Peak</td><td>100</td><td>248</td></tr><tr><td>3</td><td>9375.00</td><td>40.35</td><td>54.00</td><td>-13.65</td><td>32.89</td><td>7.46</td><td>Average</td><td>100</td><td>206</td></tr><tr><td>4</td><td>9375.00</td><td>53.40</td><td>74.00</td><td>-20.60</td><td>45.94</td><td>7.46</td><td>Peak</td><td>100</td><td>206</td></tr><tr><td>5</td><td>13710.00</td><td>43.70</td><td>68.20</td><td>-24.50</td><td>37.43</td><td>6.27</td><td>Average</td><td>100</td><td>162</td></tr><tr><td>6</td><td>13710.00</td><td>55.81</td><td>88.20</td><td>-32.39</td><td>49.54</td><td>6.27</td><td>Peak</td><td>100</td><td>162</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.35	54.00	-27.65	33.58	-7.23	Average	100	248	2	1600.00	38.23	74.00	-35.77	45.46	-7.23	Peak	100	248	3	9375.00	40.35	54.00	-13.65	32.89	7.46	Average	100	206	4	9375.00	53.40	74.00	-20.60	45.94	7.46	Peak	100	206	5	13710.00	43.70	68.20	-24.50	37.43	6.27	Average	100	162	6	13710.00	55.81	88.20	-32.39	49.54	6.27	Peak	100	162
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	26.35	54.00	-27.65	33.58	-7.23	Average	100	248																																																																
2	1600.00	38.23	74.00	-35.77	45.46	-7.23	Peak	100	248																																																																
3	9375.00	40.35	54.00	-13.65	32.89	7.46	Average	100	206																																																																
4	9375.00	53.40	74.00	-20.60	45.94	7.46	Peak	100	206																																																																
5	13710.00	43.70	68.20	-24.50	37.43	6.27	Average	100	162																																																																
6	13710.00	55.81	88.20	-32.39	49.54	6.27	Peak	100	162																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT20	Test Freq. (MHz)	6875																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>24.32</td><td>54.00</td><td>-29.68</td><td>31.55</td><td>-7.23</td><td>Average</td><td>100</td><td>128</td></tr><tr><td>2</td><td>1600.00</td><td>36.41</td><td>74.00</td><td>-37.59</td><td>43.64</td><td>-7.23</td><td>Peak</td><td>100</td><td>128</td></tr><tr><td>3</td><td>9375.00</td><td>40.67</td><td>54.00</td><td>-13.33</td><td>33.21</td><td>7.46</td><td>Average</td><td>100</td><td>162</td></tr><tr><td>4</td><td>9375.00</td><td>53.69</td><td>74.00</td><td>-20.31</td><td>46.23</td><td>7.46</td><td>Peak</td><td>100</td><td>162</td></tr><tr><td>5</td><td>13750.00</td><td>43.80</td><td>68.20</td><td>-24.40</td><td>37.55</td><td>6.25</td><td>Average</td><td>100</td><td>188</td></tr><tr><td>6</td><td>13750.00</td><td>55.89</td><td>88.20</td><td>-32.31</td><td>49.64</td><td>6.25</td><td>Peak</td><td>100</td><td>188</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.32	54.00	-29.68	31.55	-7.23	Average	100	128	2	1600.00	36.41	74.00	-37.59	43.64	-7.23	Peak	100	128	3	9375.00	40.67	54.00	-13.33	33.21	7.46	Average	100	162	4	9375.00	53.69	74.00	-20.31	46.23	7.46	Peak	100	162	5	13750.00	43.80	68.20	-24.40	37.55	6.25	Average	100	188	6	13750.00	55.89	88.20	-32.31	49.64	6.25	Peak	100	188
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.32	54.00	-29.68	31.55	-7.23	Average	100	128																																																																
2	1600.00	36.41	74.00	-37.59	43.64	-7.23	Peak	100	128																																																																
3	9375.00	40.67	54.00	-13.33	33.21	7.46	Average	100	162																																																																
4	9375.00	53.69	74.00	-20.31	46.23	7.46	Peak	100	162																																																																
5	13750.00	43.80	68.20	-24.40	37.55	6.25	Average	100	188																																																																
6	13750.00	55.89	88.20	-32.31	49.64	6.25	Peak	100	188																																																																

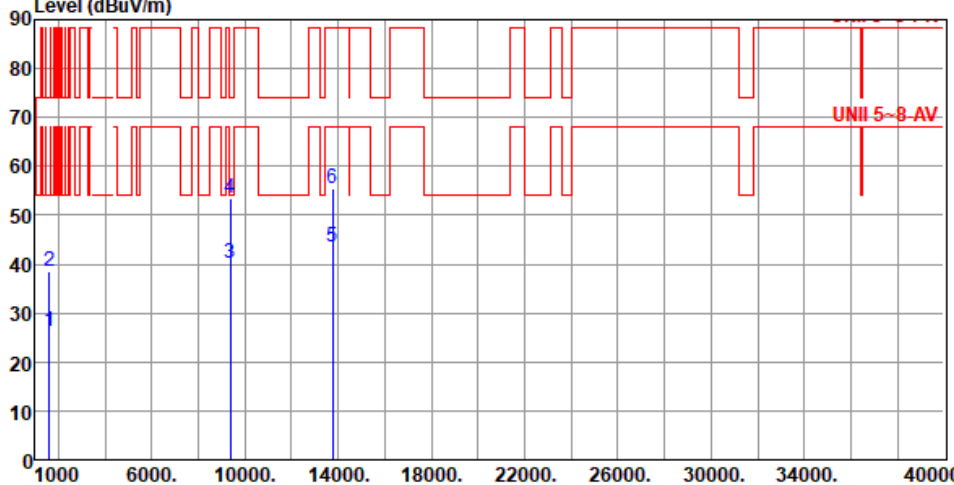


Modulation	be EHT20	Test Freq. (MHz)	6875						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	26.32	54.00	-27.68	33.55	-7.23	Average	100	252
2	1600.00	38.43	74.00	-35.57	45.66	-7.23	Peak	100	252
3	9375.00	40.12	54.00	-13.88	32.66	7.46	Average	100	208
4	9375.00	53.40	74.00	-20.60	45.94	7.46	Peak	100	208
5	13750.00	43.64	68.20	-24.56	37.39	6.25	Average	100	228
6	13750.00	55.48	88.20	-32.72	49.23	6.25	Peak	100	228

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Modulation	be EHT20	Test Freq. (MHz)	6895						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	24.32	54.00	-29.68	31.55	-7.23	Average	100	126
2	1600.00	36.36	74.00	-37.64	43.59	-7.23	Peak	100	126
3	9375.00	40.62	54.00	-13.38	33.16	7.46	Average	100	158
4	9375.00	53.79	74.00	-20.21	46.33	7.46	Peak	100	158
5	13790.00	43.91	68.20	-24.29	37.60	6.31	Average	100	251
6	13790.00	55.63	88.20	-32.57	49.32	6.31	Peak	100	251
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

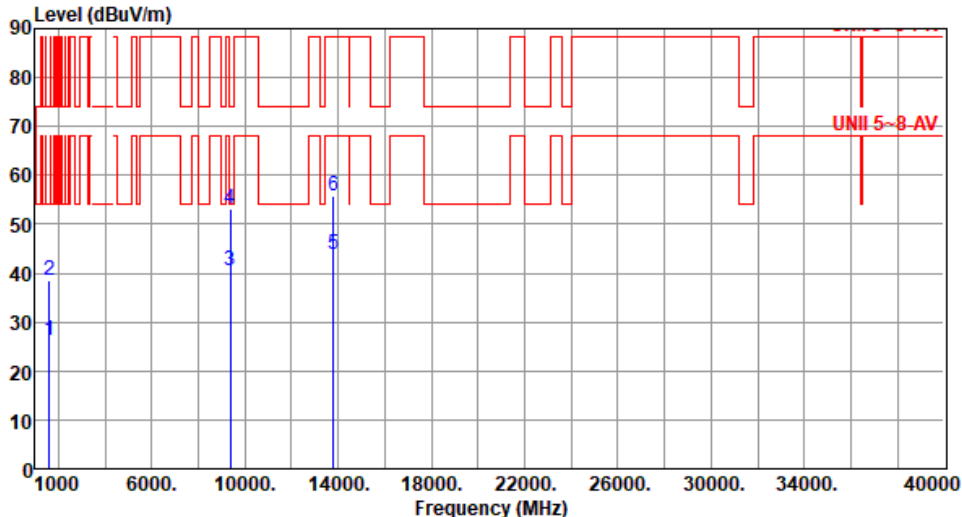


Modulation	be EHT20		Test Freq. (MHz)		6895																																																																																														
Polarization	Vertical																																																																																																		
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1600.00</td><td>26.36</td><td>54.00</td><td>-27.64</td><td>33.59</td><td>-7.23</td><td>Average</td><td>100</td><td>256</td></tr><tr><td>2</td><td>1600.00</td><td>38.45</td><td>74.00</td><td>-35.55</td><td>45.68</td><td>-7.23</td><td>Peak</td><td>100</td><td>256</td></tr><tr><td>3</td><td>9375.00</td><td>40.48</td><td>54.00</td><td>-13.52</td><td>33.02</td><td>7.46</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>4</td><td>9375.00</td><td>53.14</td><td>74.00</td><td>-20.86</td><td>45.68</td><td>7.46</td><td>Peak</td><td>100</td><td>211</td></tr><tr><td>5</td><td>13790.00</td><td>43.81</td><td>68.20</td><td>-24.39</td><td>37.50</td><td>6.31</td><td>Average</td><td>100</td><td>168</td></tr><tr><td>6</td><td>13790.00</td><td>55.81</td><td>88.20</td><td>-32.39</td><td>49.50</td><td>6.31</td><td>Peak</td><td>100</td><td>168</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	1600.00	26.36	54.00	-27.64	33.59	-7.23	Average	100	256	2	1600.00	38.45	74.00	-35.55	45.68	-7.23	Peak	100	256	3	9375.00	40.48	54.00	-13.52	33.02	7.46	Average	100	211	4	9375.00	53.14	74.00	-20.86	45.68	7.46	Peak	100	211	5	13790.00	43.81	68.20	-24.39	37.50	6.31	Average	100	168	6	13790.00	55.81	88.20	-32.39	49.50	6.31	Peak	100	168
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	1600.00	26.36	54.00	-27.64	33.59	-7.23	Average	100	256																																																																																										
2	1600.00	38.45	74.00	-35.55	45.68	-7.23	Peak	100	256																																																																																										
3	9375.00	40.48	54.00	-13.52	33.02	7.46	Average	100	211																																																																																										
4	9375.00	53.14	74.00	-20.86	45.68	7.46	Peak	100	211																																																																																										
5	13790.00	43.81	68.20	-24.39	37.50	6.31	Average	100	168																																																																																										
6	13790.00	55.81	88.20	-32.39	49.50	6.31	Peak	100	168																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			



Modulation	be EHT20	Test Freq. (MHz)	7015																																																																										
Polarization	Horizontal																																																																												
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																													
Level (dBUV/m) 90 80 70 60 50 40 30 20 10 0 1000 6000. 10000. 14000. 18000. 22000. 26000. 30000. 34000. 40000 1 2 3 4 5 6 UNII 5~8-AV <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>24.36</td><td>54.00</td><td>-29.64</td><td>31.59</td><td>-7.23</td><td>Average</td><td>100</td><td>128</td></tr><tr><td>2</td><td>1600.00</td><td>36.43</td><td>74.00</td><td>-37.57</td><td>43.66</td><td>-7.23</td><td>Peak</td><td>100</td><td>128</td></tr><tr><td>3</td><td>9375.00</td><td>40.73</td><td>54.00</td><td>-13.27</td><td>33.27</td><td>7.46</td><td>Average</td><td>100</td><td>160</td></tr><tr><td>4</td><td>9375.00</td><td>53.75</td><td>74.00</td><td>-20.25</td><td>46.29</td><td>7.46</td><td>Peak</td><td>100</td><td>160</td></tr><tr><td>5</td><td>14030.00</td><td>43.76</td><td>68.20</td><td>-24.44</td><td>36.94</td><td>6.82</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>6</td><td>14030.00</td><td>57.38</td><td>88.20</td><td>-30.82</td><td>50.56</td><td>6.82</td><td>Peak</td><td>100</td><td>178</td></tr></table> <tr><td colspan="4"> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). </td></tr>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.36	54.00	-29.64	31.59	-7.23	Average	100	128	2	1600.00	36.43	74.00	-37.57	43.66	-7.23	Peak	100	128	3	9375.00	40.73	54.00	-13.27	33.27	7.46	Average	100	160	4	9375.00	53.75	74.00	-20.25	46.29	7.46	Peak	100	160	5	14030.00	43.76	68.20	-24.44	36.94	6.82	Average	100	178	6	14030.00	57.38	88.20	-30.82	50.56	6.82	Peak	100	178	Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).			
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																				
1	1600.00	24.36	54.00	-29.64	31.59	-7.23	Average	100	128																																																																				
2	1600.00	36.43	74.00	-37.57	43.66	-7.23	Peak	100	128																																																																				
3	9375.00	40.73	54.00	-13.27	33.27	7.46	Average	100	160																																																																				
4	9375.00	53.75	74.00	-20.25	46.29	7.46	Peak	100	160																																																																				
5	14030.00	43.76	68.20	-24.44	36.94	6.82	Average	100	178																																																																				
6	14030.00	57.38	88.20	-30.82	50.56	6.82	Peak	100	178																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																													

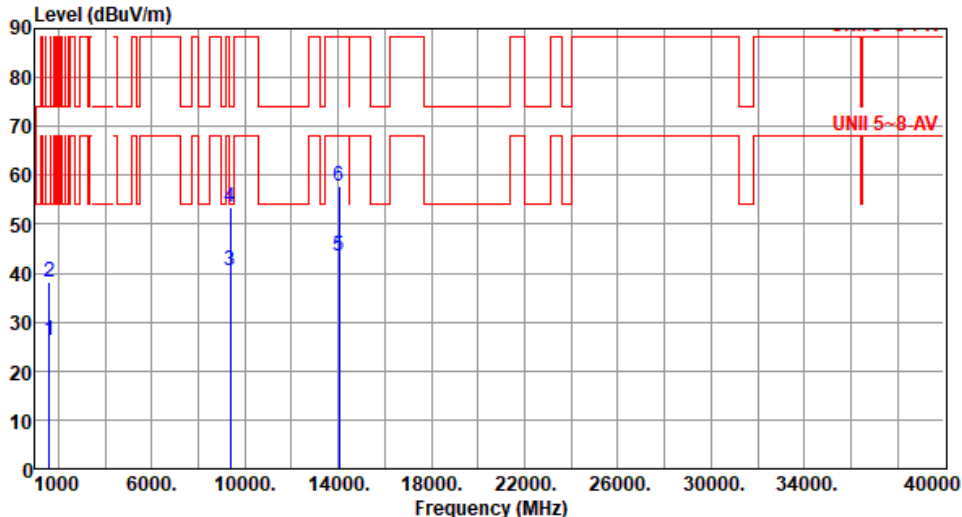

Modulation	be EHT20		Test Freq. (MHz)		7015																																																																										
Polarization	Vertical																																																																														
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																															
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>26.24</td><td>54.00</td><td>-27.76</td><td>33.47</td><td>-7.23</td><td>Average</td><td>100</td><td>249</td></tr><tr><td>2</td><td>1600.00</td><td>38.33</td><td>74.00</td><td>-35.67</td><td>45.56</td><td>-7.23</td><td>Peak</td><td>100</td><td>249</td></tr><tr><td>3</td><td>9375.00</td><td>40.45</td><td>54.00</td><td>-13.55</td><td>32.99</td><td>7.46</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>4</td><td>9375.00</td><td>53.40</td><td>74.00</td><td>-20.60</td><td>45.94</td><td>7.46</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>5</td><td>14030.00</td><td>43.66</td><td>68.20</td><td>-24.54</td><td>36.84</td><td>6.82</td><td>Average</td><td>100</td><td>168</td></tr><tr><td>6</td><td>14030.00</td><td>57.66</td><td>88.20</td><td>-30.54</td><td>50.84</td><td>6.82</td><td>Peak</td><td>100</td><td>168</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.24	54.00	-27.76	33.47	-7.23	Average	100	249	2	1600.00	38.33	74.00	-35.67	45.56	-7.23	Peak	100	249	3	9375.00	40.45	54.00	-13.55	32.99	7.46	Average	100	208	4	9375.00	53.40	74.00	-20.60	45.94	7.46	Peak	100	208	5	14030.00	43.66	68.20	-24.54	36.84	6.82	Average	100	168	6	14030.00	57.66	88.20	-30.54	50.84	6.82	Peak	100	168
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1600.00	26.24	54.00	-27.76	33.47	-7.23	Average	100	249																																																																						
2	1600.00	38.33	74.00	-35.67	45.56	-7.23	Peak	100	249																																																																						
3	9375.00	40.45	54.00	-13.55	32.99	7.46	Average	100	208																																																																						
4	9375.00	53.40	74.00	-20.60	45.94	7.46	Peak	100	208																																																																						
5	14030.00	43.66	68.20	-24.54	36.84	6.82	Average	100	168																																																																						
6	14030.00	57.66	88.20	-30.54	50.84	6.82	Peak	100	168																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	7095																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>24.32</td><td>54.00</td><td>-29.68</td><td>31.55</td><td>-7.23</td><td>Average</td><td>100</td><td>122</td></tr><tr><td>2</td><td>1600.00</td><td>36.41</td><td>74.00</td><td>-37.59</td><td>43.64</td><td>-7.23</td><td>Peak</td><td>100</td><td>122</td></tr><tr><td>3</td><td>7125.00</td><td>47.68</td><td>68.20</td><td>-20.52</td><td>42.50</td><td>5.18</td><td>Average</td><td>244</td><td>242</td></tr><tr><td>4</td><td>7125.00</td><td>59.66</td><td>88.20</td><td>-28.54</td><td>54.48</td><td>5.18</td><td>Peak</td><td>244</td><td>242</td></tr><tr><td>5</td><td>14190.00</td><td>44.04</td><td>68.20</td><td>-24.16</td><td>36.80</td><td>7.24</td><td>Average</td><td>100</td><td>97</td></tr><tr><td>6</td><td>14190.00</td><td>58.35</td><td>88.20</td><td>-29.85</td><td>51.11</td><td>7.24</td><td>Peak</td><td>100</td><td>97</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.32	54.00	-29.68	31.55	-7.23	Average	100	122	2	1600.00	36.41	74.00	-37.59	43.64	-7.23	Peak	100	122	3	7125.00	47.68	68.20	-20.52	42.50	5.18	Average	244	242	4	7125.00	59.66	88.20	-28.54	54.48	5.18	Peak	244	242	5	14190.00	44.04	68.20	-24.16	36.80	7.24	Average	100	97	6	14190.00	58.35	88.20	-29.85	51.11	7.24	Peak	100	97
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.32	54.00	-29.68	31.55	-7.23	Average	100	122																																																																
2	1600.00	36.41	74.00	-37.59	43.64	-7.23	Peak	100	122																																																																
3	7125.00	47.68	68.20	-20.52	42.50	5.18	Average	244	242																																																																
4	7125.00	59.66	88.20	-28.54	54.48	5.18	Peak	244	242																																																																
5	14190.00	44.04	68.20	-24.16	36.80	7.24	Average	100	97																																																																
6	14190.00	58.35	88.20	-29.85	51.11	7.24	Peak	100	97																																																																

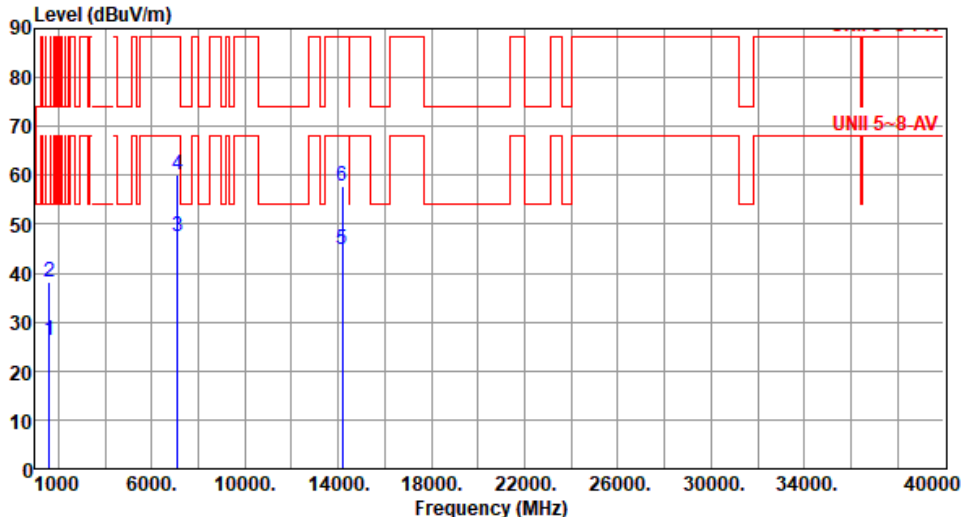

Modulation	be EHT20	Test Freq. (MHz)	7095						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	26.34	54.00	-27.66	33.57	-7.23	Average	100	246
2	1600.00	38.28	74.00	-35.72	45.51	-7.23	Peak	100	246
3	7125.00	47.64	68.20	-20.56	42.46	5.18	Average	242	278
4	7125.00	60.07	88.20	-28.13	54.89	5.18	Peak	242	278
5	14190.00	44.80	68.20	-23.40	37.56	7.24	Average	100	170
6	14190.00	57.64	88.20	-30.56	50.40	7.24	Peak	100	170
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									




Unwanted Emissions (Above 1GHz) for be EHT40

Modulation	be EHT40	Test Freq. (MHz)	5965						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	24.32	54.00	-29.68	31.55	-7.23	Average	100	132
2	1600.00	36.54	74.00	-37.46	43.77	-7.23	Peak	100	132
3	5925.00	44.89	68.20	-23.31	43.72	1.17	Average	179	87
4	5925.00	57.17	88.20	-31.03	56.00	1.17	Peak	179	87
5	11930.00	41.62	54.00	-12.38	35.19	6.43	Average	100	215
6	11930.00	54.42	74.00	-19.58	47.99	6.43	Peak	100	215

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

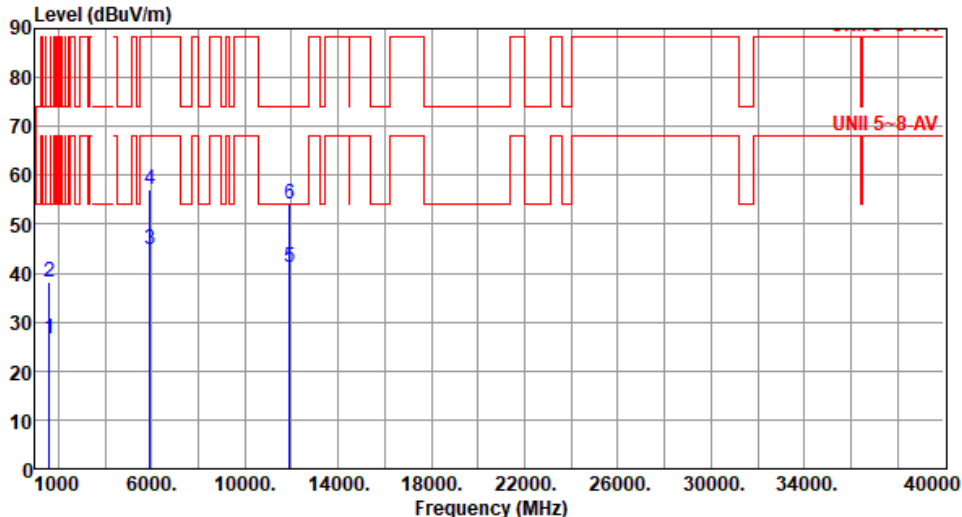


Modulation	be EHT40		Test Freq. (MHz)		5965																																																																										
Polarization	Vertical																																																																														
Test By :Allen Lee Temperature(°C):22 Humidity(%):64																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>26.42</td><td>54.00</td><td>-27.58</td><td>33.65</td><td>-7.23</td><td>Average</td><td>100</td><td>250</td></tr><tr><td>2</td><td>1600.00</td><td>38.06</td><td>74.00</td><td>-35.94</td><td>45.29</td><td>-7.23</td><td>Peak</td><td>100</td><td>250</td></tr><tr><td>3</td><td>5925.00</td><td>44.95</td><td>68.20</td><td>-23.25</td><td>43.78</td><td>1.17</td><td>Average</td><td>185</td><td>235</td></tr><tr><td>4</td><td>5925.00</td><td>56.99</td><td>88.20</td><td>-31.21</td><td>55.82</td><td>1.17</td><td>Peak</td><td>185</td><td>235</td></tr><tr><td>5</td><td>11930.00</td><td>41.32</td><td>54.00</td><td>-12.68</td><td>34.89</td><td>6.43</td><td>Average</td><td>100</td><td>286</td></tr><tr><td>6</td><td>11930.00</td><td>54.04</td><td>74.00</td><td>-19.96</td><td>47.61</td><td>6.43</td><td>Peak</td><td>100</td><td>286</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.42	54.00	-27.58	33.65	-7.23	Average	100	250	2	1600.00	38.06	74.00	-35.94	45.29	-7.23	Peak	100	250	3	5925.00	44.95	68.20	-23.25	43.78	1.17	Average	185	235	4	5925.00	56.99	88.20	-31.21	55.82	1.17	Peak	185	235	5	11930.00	41.32	54.00	-12.68	34.89	6.43	Average	100	286	6	11930.00	54.04	74.00	-19.96	47.61	6.43	Peak	100	286
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1600.00	26.42	54.00	-27.58	33.65	-7.23	Average	100	250																																																																						
2	1600.00	38.06	74.00	-35.94	45.29	-7.23	Peak	100	250																																																																						
3	5925.00	44.95	68.20	-23.25	43.78	1.17	Average	185	235																																																																						
4	5925.00	56.99	88.20	-31.21	55.82	1.17	Peak	185	235																																																																						
5	11930.00	41.32	54.00	-12.68	34.89	6.43	Average	100	286																																																																						
6	11930.00	54.04	74.00	-19.96	47.61	6.43	Peak	100	286																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

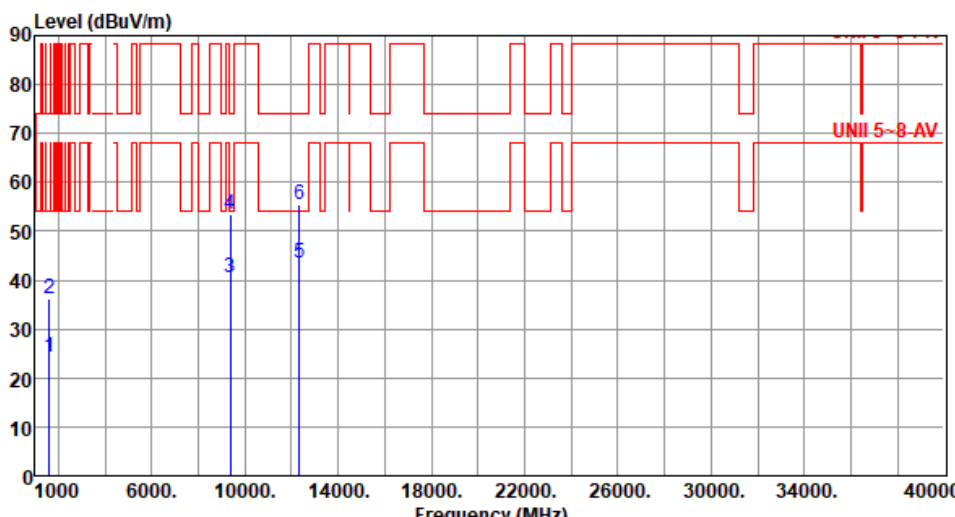


Modulation	be EHT40	Test Freq. (MHz)	6165																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>24.39</td><td>54.00</td><td>-29.61</td><td>31.62</td><td>-7.23</td><td>Average</td><td>100</td><td>116</td></tr><tr><td>2</td><td>1600.00</td><td>36.26</td><td>74.00</td><td>-37.74</td><td>43.49</td><td>-7.23</td><td>Peak</td><td>100</td><td>116</td></tr><tr><td>3</td><td>9375.00</td><td>40.55</td><td>54.00</td><td>-13.45</td><td>33.09</td><td>7.46</td><td>Average</td><td>100</td><td>169</td></tr><tr><td>4</td><td>9375.00</td><td>53.54</td><td>74.00</td><td>-20.46</td><td>46.08</td><td>7.46</td><td>Peak</td><td>100</td><td>169</td></tr><tr><td>5</td><td>12330.00</td><td>43.64</td><td>54.00</td><td>-10.36</td><td>36.49</td><td>7.15</td><td>Average</td><td>100</td><td>130</td></tr><tr><td>6</td><td>12330.00</td><td>55.52</td><td>74.00</td><td>-18.48</td><td>48.37</td><td>7.15</td><td>Peak</td><td>100</td><td>130</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.39	54.00	-29.61	31.62	-7.23	Average	100	116	2	1600.00	36.26	74.00	-37.74	43.49	-7.23	Peak	100	116	3	9375.00	40.55	54.00	-13.45	33.09	7.46	Average	100	169	4	9375.00	53.54	74.00	-20.46	46.08	7.46	Peak	100	169	5	12330.00	43.64	54.00	-10.36	36.49	7.15	Average	100	130	6	12330.00	55.52	74.00	-18.48	48.37	7.15	Peak	100	130
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.39	54.00	-29.61	31.62	-7.23	Average	100	116																																																																
2	1600.00	36.26	74.00	-37.74	43.49	-7.23	Peak	100	116																																																																
3	9375.00	40.55	54.00	-13.45	33.09	7.46	Average	100	169																																																																
4	9375.00	53.54	74.00	-20.46	46.08	7.46	Peak	100	169																																																																
5	12330.00	43.64	54.00	-10.36	36.49	7.15	Average	100	130																																																																
6	12330.00	55.52	74.00	-18.48	48.37	7.15	Peak	100	130																																																																




Modulation	be EHT40		Test Freq. (MHz)		6165				
Polarization	Vertical								
Test By :Allen Lee			Temperature(°C):23			Humidity(%):63			
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	1600.00	26.35	54.00	-27.65	33.58	-7.23	Average	100	257
2	1600.00	37.94	74.00	-36.06	45.17	-7.23	Peak	100	257
3	9375.00	40.28	54.00	-13.72	32.82	7.46	Average	100	202
4	9375.00	53.19	74.00	-20.81	45.73	7.46	Peak	100	202
5	12330.00	43.54	54.00	-10.46	36.39	7.15	Average	100	259
6	12330.00	55.38	74.00	-18.62	48.23	7.15	Peak	100	259

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

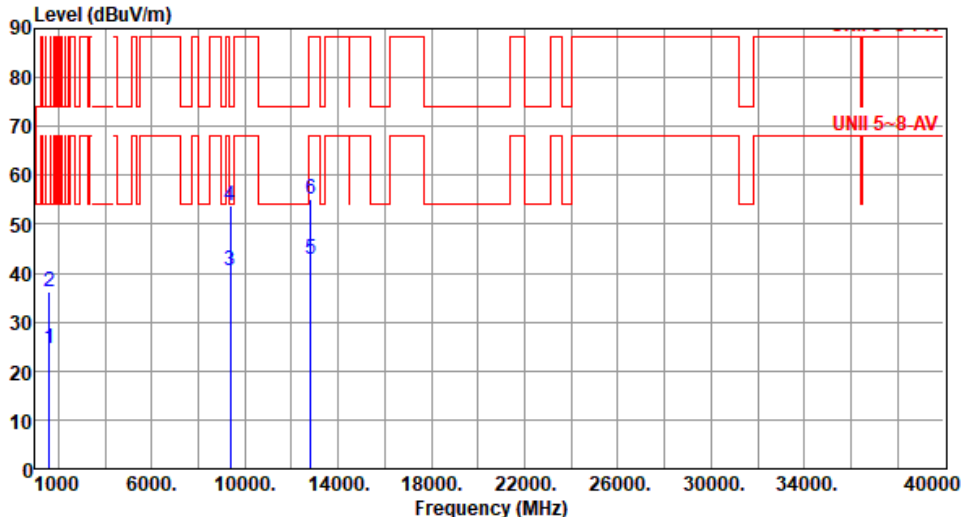

Modulation	be EHT40		Test Freq. (MHz)		6405																																																																										
Polarization	Horizontal																																																																														
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>24.44</td><td>54.00</td><td>-29.56</td><td>31.67</td><td>-7.23</td><td>Average</td><td>100</td><td>126</td></tr><tr><td>2</td><td>1600.00</td><td>36.29</td><td>74.00</td><td>-37.71</td><td>43.52</td><td>-7.23</td><td>Peak</td><td>100</td><td>126</td></tr><tr><td>3</td><td>9375.00</td><td>40.42</td><td>54.00</td><td>-13.58</td><td>32.96</td><td>7.46</td><td>Average</td><td>100</td><td>166</td></tr><tr><td>4</td><td>9375.00</td><td>53.73</td><td>74.00</td><td>-20.27</td><td>46.27</td><td>7.46</td><td>Peak</td><td>100</td><td>166</td></tr><tr><td>5</td><td>12810.00</td><td>42.71</td><td>68.20</td><td>-25.49</td><td>35.86</td><td>6.85</td><td>Average</td><td>100</td><td>163</td></tr><tr><td>6</td><td>12810.00</td><td>55.24</td><td>88.20</td><td>-32.96</td><td>48.39</td><td>6.85</td><td>Peak</td><td>100</td><td>163</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.44	54.00	-29.56	31.67	-7.23	Average	100	126	2	1600.00	36.29	74.00	-37.71	43.52	-7.23	Peak	100	126	3	9375.00	40.42	54.00	-13.58	32.96	7.46	Average	100	166	4	9375.00	53.73	74.00	-20.27	46.27	7.46	Peak	100	166	5	12810.00	42.71	68.20	-25.49	35.86	6.85	Average	100	163	6	12810.00	55.24	88.20	-32.96	48.39	6.85	Peak	100	163
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1600.00	24.44	54.00	-29.56	31.67	-7.23	Average	100	126																																																																						
2	1600.00	36.29	74.00	-37.71	43.52	-7.23	Peak	100	126																																																																						
3	9375.00	40.42	54.00	-13.58	32.96	7.46	Average	100	166																																																																						
4	9375.00	53.73	74.00	-20.27	46.27	7.46	Peak	100	166																																																																						
5	12810.00	42.71	68.20	-25.49	35.86	6.85	Average	100	163																																																																						
6	12810.00	55.24	88.20	-32.96	48.39	6.85	Peak	100	163																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

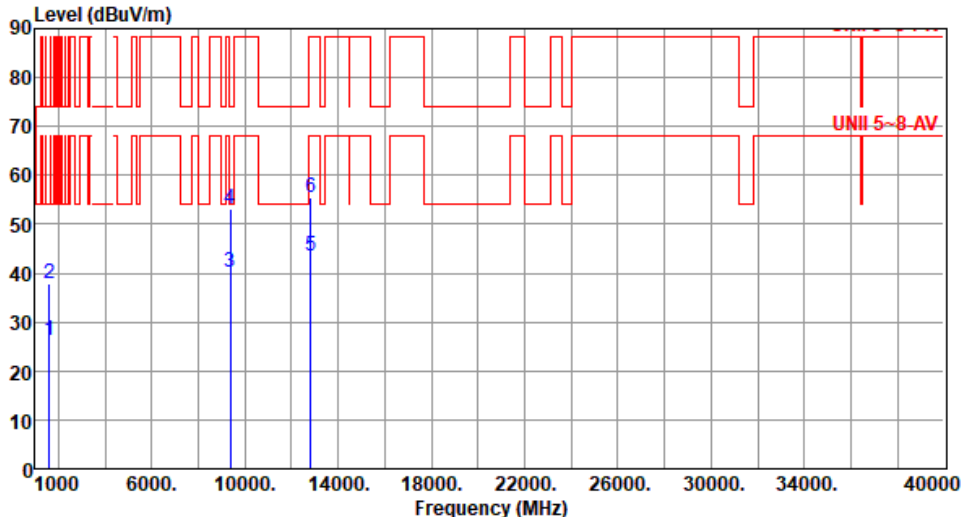

Modulation	be EHT40	Test Freq. (MHz)	6405																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>26.34</td><td>54.00</td><td>-27.66</td><td>33.57</td><td>-7.23</td><td>Average</td><td>100</td><td>253</td></tr><tr><td>2</td><td>1600.00</td><td>37.88</td><td>74.00</td><td>-36.12</td><td>45.11</td><td>-7.23</td><td>Peak</td><td>100</td><td>253</td></tr><tr><td>3</td><td>9375.00</td><td>40.31</td><td>54.00</td><td>-13.69</td><td>32.85</td><td>7.46</td><td>Average</td><td>100</td><td>205</td></tr><tr><td>4</td><td>9375.00</td><td>53.21</td><td>74.00</td><td>-20.79</td><td>45.75</td><td>7.46</td><td>Peak</td><td>100</td><td>205</td></tr><tr><td>5</td><td>12810.00</td><td>43.44</td><td>68.20</td><td>-24.76</td><td>36.59</td><td>6.85</td><td>Average</td><td>100</td><td>293</td></tr><tr><td>6</td><td>12810.00</td><td>55.40</td><td>88.20</td><td>-32.80</td><td>48.55</td><td>6.85</td><td>Peak</td><td>100</td><td>293</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.34	54.00	-27.66	33.57	-7.23	Average	100	253	2	1600.00	37.88	74.00	-36.12	45.11	-7.23	Peak	100	253	3	9375.00	40.31	54.00	-13.69	32.85	7.46	Average	100	205	4	9375.00	53.21	74.00	-20.79	45.75	7.46	Peak	100	205	5	12810.00	43.44	68.20	-24.76	36.59	6.85	Average	100	293	6	12810.00	55.40	88.20	-32.80	48.55	6.85	Peak	100	293
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	26.34	54.00	-27.66	33.57	-7.23	Average	100	253																																																																
2	1600.00	37.88	74.00	-36.12	45.11	-7.23	Peak	100	253																																																																
3	9375.00	40.31	54.00	-13.69	32.85	7.46	Average	100	205																																																																
4	9375.00	53.21	74.00	-20.79	45.75	7.46	Peak	100	205																																																																
5	12810.00	43.44	68.20	-24.76	36.59	6.85	Average	100	293																																																																
6	12810.00	55.40	88.20	-32.80	48.55	6.85	Peak	100	293																																																																




Modulation	be EHT40	Test Freq. (MHz)	6445						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	24.40	54.00	-29.60	31.63	-7.23	Average	100	118
2	1600.00	36.31	74.00	-37.69	43.54	-7.23	Peak	100	118
3	9375.00	40.62	54.00	-13.38	33.16	7.46	Average	100	161
4	9375.00	53.74	74.00	-20.26	46.28	7.46	Peak	100	161
5	12890.00	43.00	68.20	-25.20	36.28	6.72	Average	100	331
6	12890.00	54.99	88.20	-33.21	48.27	6.72	Peak	100	331
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									




Modulation	be EHT40	Test Freq. (MHz)	6445						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	26.25	54.00	-27.75	33.48	-7.23	Average	100	258
2	1600.00	38.06	74.00	-35.94	45.29	-7.23	Peak	100	258
3	9375.00	40.45	54.00	-13.55	32.99	7.46	Average	100	214
4	9375.00	53.18	74.00	-20.82	45.72	7.46	Peak	100	214
5	12890.00	43.53	68.20	-24.67	36.81	6.72	Average	100	283
6	12890.00	55.09	88.20	-33.11	48.37	6.72	Peak	100	283
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

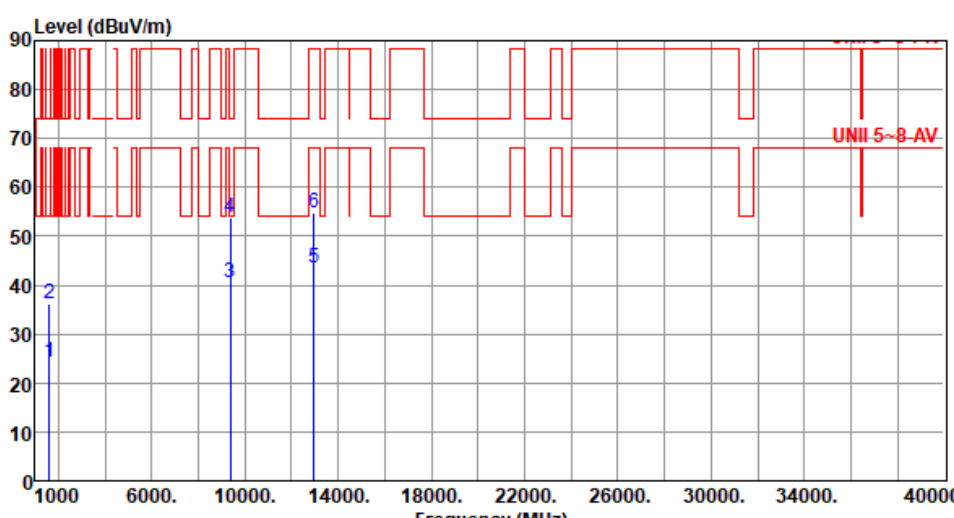


Modulation	be EHT40	Test Freq. (MHz)	6485						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	24.37	54.00	-29.63	31.60	-7.23	Average	100	120
2	1600.00	36.30	74.00	-37.70	43.53	-7.23	Peak	100	120
3	9375.00	40.60	54.00	-13.40	33.14	7.46	Average	100	168
4	9375.00	53.73	74.00	-20.27	46.27	7.46	Peak	100	168
5	12970.00	43.35	68.20	-24.85	36.76	6.59	Average	100	283
6	12970.00	54.94	88.20	-33.26	48.35	6.59	Peak	100	283
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

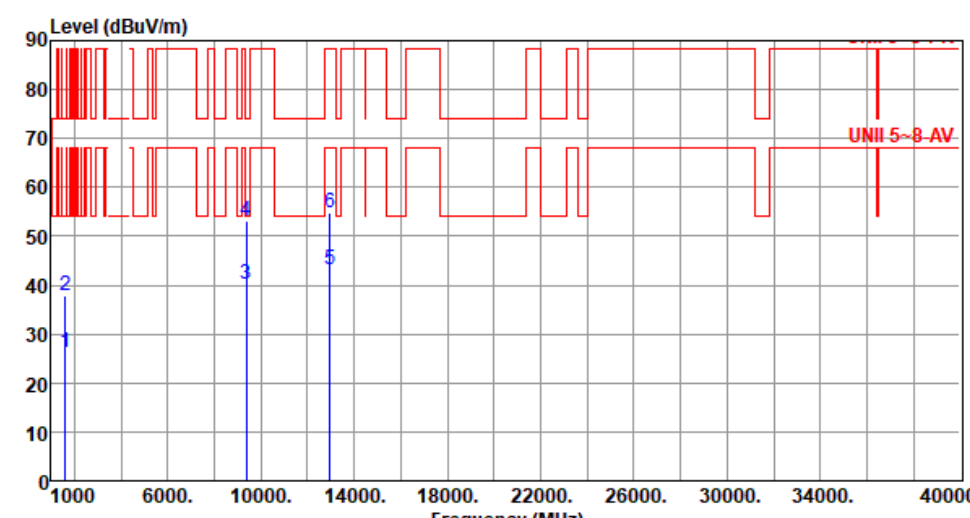


Modulation	be EHT40	Test Freq. (MHz)	6485																																																																							
Polarization	Vertical																																																																									
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																										
																																																																										
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>26.26</td><td>54.00</td><td>-27.74</td><td>33.49</td><td>-7.23</td><td>Average</td><td>100</td><td>259</td></tr><tr><td>2</td><td>1600.00</td><td>38.00</td><td>74.00</td><td>-36.00</td><td>45.23</td><td>-7.23</td><td>Peak</td><td>100</td><td>259</td></tr><tr><td>3</td><td>9375.00</td><td>40.21</td><td>54.00</td><td>-13.79</td><td>32.75</td><td>7.46</td><td>Average</td><td>100</td><td>200</td></tr><tr><td>4</td><td>9375.00</td><td>53.13</td><td>74.00</td><td>-20.87</td><td>45.67</td><td>7.46</td><td>Peak</td><td>100</td><td>200</td></tr><tr><td>5</td><td>12970.00</td><td>43.16</td><td>68.20</td><td>-25.04</td><td>36.57</td><td>6.59</td><td>Average</td><td>100</td><td>254</td></tr><tr><td>6</td><td>12970.00</td><td>54.81</td><td>88.20</td><td>-33.39</td><td>48.22</td><td>6.59</td><td>Peak</td><td>100</td><td>254</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.26	54.00	-27.74	33.49	-7.23	Average	100	259	2	1600.00	38.00	74.00	-36.00	45.23	-7.23	Peak	100	259	3	9375.00	40.21	54.00	-13.79	32.75	7.46	Average	100	200	4	9375.00	53.13	74.00	-20.87	45.67	7.46	Peak	100	200	5	12970.00	43.16	68.20	-25.04	36.57	6.59	Average	100	254	6	12970.00	54.81	88.20	-33.39	48.22	6.59	Peak	100	254			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																	
1	1600.00	26.26	54.00	-27.74	33.49	-7.23	Average	100	259																																																																	
2	1600.00	38.00	74.00	-36.00	45.23	-7.23	Peak	100	259																																																																	
3	9375.00	40.21	54.00	-13.79	32.75	7.46	Average	100	200																																																																	
4	9375.00	53.13	74.00	-20.87	45.67	7.46	Peak	100	200																																																																	
5	12970.00	43.16	68.20	-25.04	36.57	6.59	Average	100	254																																																																	
6	12970.00	54.81	88.20	-33.39	48.22	6.59	Peak	100	254																																																																	
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																										

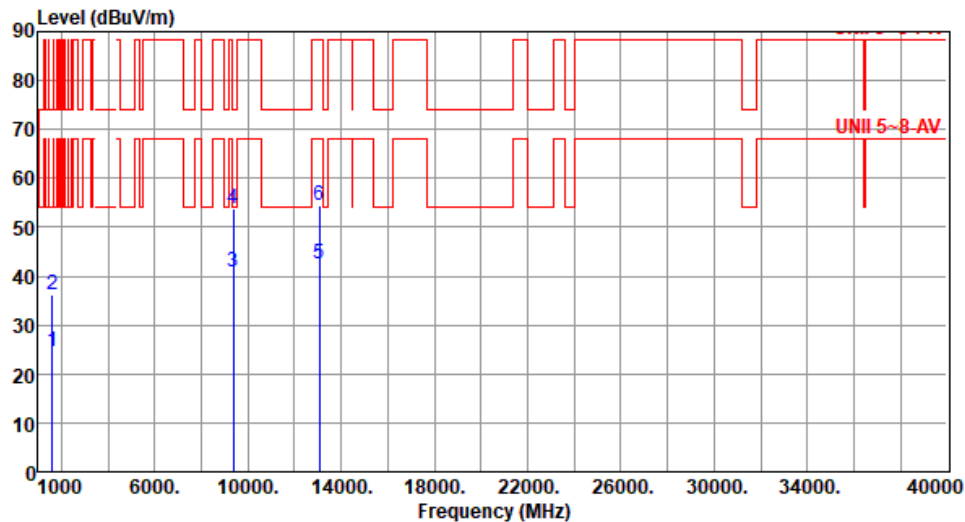


Modulation	be EHT40	Test Freq. (MHz)	6525																																																																							
Polarization	Horizontal																																																																									
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																										
																																																																										
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>24.43</td><td>54.00</td><td>-29.57</td><td>31.66</td><td>-7.23</td><td>Average</td><td>100</td><td>127</td></tr><tr><td>2</td><td>1600.00</td><td>36.32</td><td>74.00</td><td>-37.68</td><td>43.55</td><td>-7.23</td><td>Peak</td><td>100</td><td>127</td></tr><tr><td>3</td><td>9375.00</td><td>40.71</td><td>54.00</td><td>-13.29</td><td>33.25</td><td>7.46</td><td>Average</td><td>100</td><td>173</td></tr><tr><td>4</td><td>9375.00</td><td>53.82</td><td>74.00</td><td>-20.18</td><td>46.36</td><td>7.46</td><td>Peak</td><td>100</td><td>173</td></tr><tr><td>5</td><td>13050.00</td><td>42.63</td><td>68.20</td><td>-25.57</td><td>36.44</td><td>6.19</td><td>Average</td><td>100</td><td>215</td></tr><tr><td>6</td><td>13050.00</td><td>54.51</td><td>88.20</td><td>-33.69</td><td>48.32</td><td>6.19</td><td>Peak</td><td>100</td><td>215</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.43	54.00	-29.57	31.66	-7.23	Average	100	127	2	1600.00	36.32	74.00	-37.68	43.55	-7.23	Peak	100	127	3	9375.00	40.71	54.00	-13.29	33.25	7.46	Average	100	173	4	9375.00	53.82	74.00	-20.18	46.36	7.46	Peak	100	173	5	13050.00	42.63	68.20	-25.57	36.44	6.19	Average	100	215	6	13050.00	54.51	88.20	-33.69	48.32	6.19	Peak	100	215			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																	
1	1600.00	24.43	54.00	-29.57	31.66	-7.23	Average	100	127																																																																	
2	1600.00	36.32	74.00	-37.68	43.55	-7.23	Peak	100	127																																																																	
3	9375.00	40.71	54.00	-13.29	33.25	7.46	Average	100	173																																																																	
4	9375.00	53.82	74.00	-20.18	46.36	7.46	Peak	100	173																																																																	
5	13050.00	42.63	68.20	-25.57	36.44	6.19	Average	100	215																																																																	
6	13050.00	54.51	88.20	-33.69	48.32	6.19	Peak	100	215																																																																	
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																										

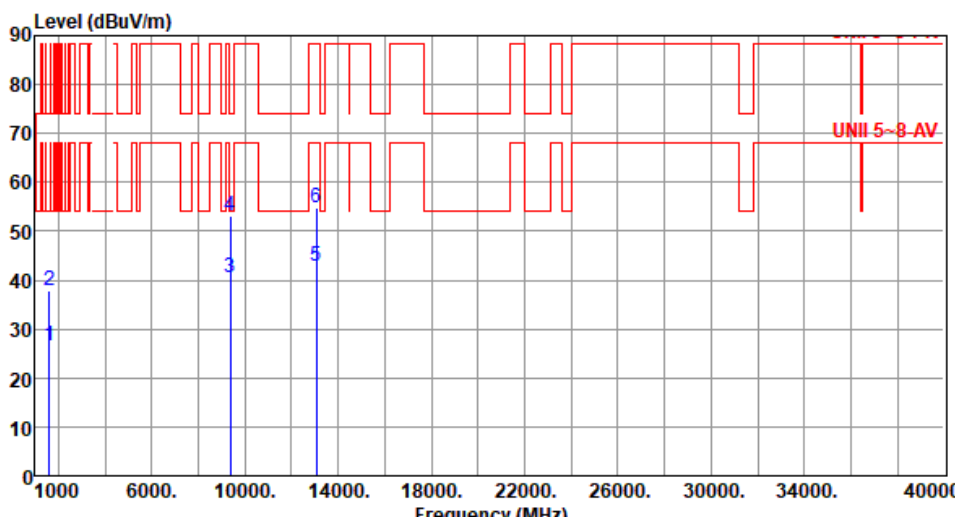


Modulation	be EHT40	Test Freq. (MHz)	6525																																																												
Polarization	Vertical																																																														
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																															
Level (dBUV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn level reading High Table MHz dBUV/m dBUV/m dB dBUV dB/m cm deg <table><tr><td>1</td><td>1600.00</td><td>26.44</td><td>54.00</td><td>-27.56</td><td>33.67</td><td>-7.23</td><td>Average</td><td>100</td><td>261</td></tr><tr><td>2</td><td>1600.00</td><td>37.99</td><td>74.00</td><td>-36.01</td><td>45.22</td><td>-7.23</td><td>Peak</td><td>100</td><td>261</td></tr><tr><td>3</td><td>9375.00</td><td>40.38</td><td>54.00</td><td>-13.62</td><td>32.92</td><td>7.46</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>4</td><td>9375.00</td><td>53.22</td><td>74.00</td><td>-20.78</td><td>45.76</td><td>7.46</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>5</td><td>13050.00</td><td>42.70</td><td>68.20</td><td>-25.50</td><td>36.51</td><td>6.19</td><td>Average</td><td>100</td><td>233</td></tr><tr><td>6</td><td>13050.00</td><td>54.73</td><td>88.20</td><td>-33.47</td><td>48.54</td><td>6.19</td><td>Peak</td><td>100</td><td>233</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).				1	1600.00	26.44	54.00	-27.56	33.67	-7.23	Average	100	261	2	1600.00	37.99	74.00	-36.01	45.22	-7.23	Peak	100	261	3	9375.00	40.38	54.00	-13.62	32.92	7.46	Average	100	208	4	9375.00	53.22	74.00	-20.78	45.76	7.46	Peak	100	208	5	13050.00	42.70	68.20	-25.50	36.51	6.19	Average	100	233	6	13050.00	54.73	88.20	-33.47	48.54	6.19	Peak	100	233
1	1600.00	26.44	54.00	-27.56	33.67	-7.23	Average	100	261																																																						
2	1600.00	37.99	74.00	-36.01	45.22	-7.23	Peak	100	261																																																						
3	9375.00	40.38	54.00	-13.62	32.92	7.46	Average	100	208																																																						
4	9375.00	53.22	74.00	-20.78	45.76	7.46	Peak	100	208																																																						
5	13050.00	42.70	68.20	-25.50	36.51	6.19	Average	100	233																																																						
6	13050.00	54.73	88.20	-33.47	48.54	6.19	Peak	100	233																																																						

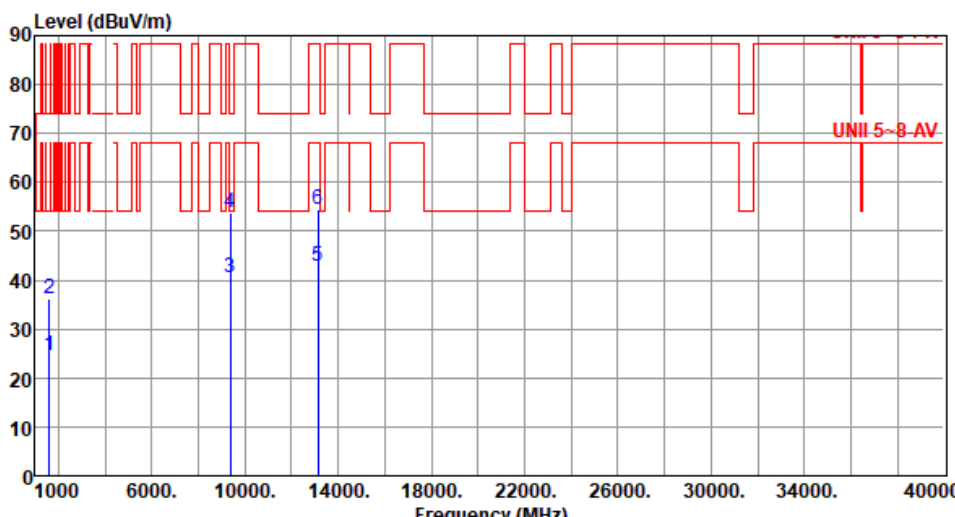

Modulation	be EHT40	Test Freq. (MHz)	6565																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>24.44</td><td>54.00</td><td>-29.56</td><td>31.67</td><td>-7.23</td><td>Average</td><td>100</td><td>139</td></tr><tr><td>2</td><td>1600.00</td><td>36.33</td><td>74.00</td><td>-37.67</td><td>43.56</td><td>-7.23</td><td>Peak</td><td>100</td><td>139</td></tr><tr><td>3</td><td>9375.00</td><td>40.63</td><td>54.00</td><td>-13.37</td><td>33.17</td><td>7.46</td><td>Average</td><td>100</td><td>172</td></tr><tr><td>4</td><td>9375.00</td><td>53.81</td><td>74.00</td><td>-20.19</td><td>46.35</td><td>7.46</td><td>Peak</td><td>100</td><td>172</td></tr><tr><td>5</td><td>13130.00</td><td>42.75</td><td>68.20</td><td>-25.45</td><td>36.58</td><td>6.17</td><td>Average</td><td>100</td><td>245</td></tr><tr><td>6</td><td>13130.00</td><td>54.33</td><td>88.20</td><td>-33.87</td><td>48.16</td><td>6.17</td><td>Peak</td><td>100</td><td>245</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.44	54.00	-29.56	31.67	-7.23	Average	100	139	2	1600.00	36.33	74.00	-37.67	43.56	-7.23	Peak	100	139	3	9375.00	40.63	54.00	-13.37	33.17	7.46	Average	100	172	4	9375.00	53.81	74.00	-20.19	46.35	7.46	Peak	100	172	5	13130.00	42.75	68.20	-25.45	36.58	6.17	Average	100	245	6	13130.00	54.33	88.20	-33.87	48.16	6.17	Peak	100	245
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.44	54.00	-29.56	31.67	-7.23	Average	100	139																																																																
2	1600.00	36.33	74.00	-37.67	43.56	-7.23	Peak	100	139																																																																
3	9375.00	40.63	54.00	-13.37	33.17	7.46	Average	100	172																																																																
4	9375.00	53.81	74.00	-20.19	46.35	7.46	Peak	100	172																																																																
5	13130.00	42.75	68.20	-25.45	36.58	6.17	Average	100	245																																																																
6	13130.00	54.33	88.20	-33.87	48.16	6.17	Peak	100	245																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

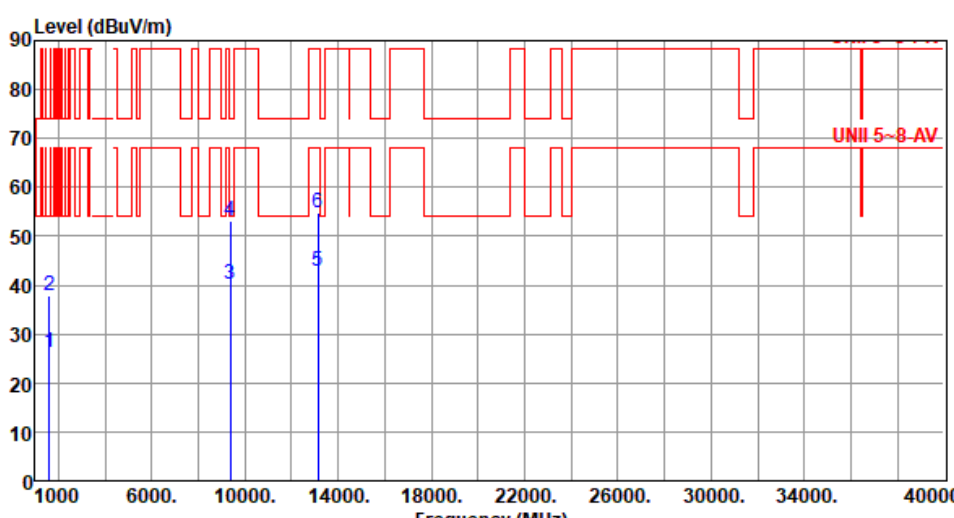

Modulation	be EHT40	Test Freq. (MHz)	6565						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	26.26	54.00	-27.74	33.49	-7.23	Average	100	254
2	1600.00	37.93	74.00	-36.07	45.16	-7.23	Peak	100	254
3	9375.00	40.31	54.00	-13.69	32.85	7.46	Average	100	209
4	9375.00	53.23	74.00	-20.77	45.77	7.46	Peak	100	209
5	13130.00	42.94	68.20	-25.26	36.77	6.17	Average	100	215
6	13130.00	54.74	88.20	-33.46	48.57	6.17	Peak	100	215

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	be EHT40	Test Freq. (MHz)	6725																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																									
Level (dBUV/m) 90 80 70 60 50 40 30 20 10 0 1000 6000. 10000. 14000. 18000. 22000. 26000. 30000. 34000. 40000 Frequency (MHz) 1 2 3 4 5 6 UNII 5~8-AV <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>24.40</td><td>54.00</td><td>-29.60</td><td>31.63</td><td>-7.23</td><td>Average</td><td>100</td><td>128</td></tr><tr><td>2</td><td>1600.00</td><td>36.29</td><td>74.00</td><td>-37.71</td><td>43.52</td><td>-7.23</td><td>Peak</td><td>100</td><td>128</td></tr><tr><td>3</td><td>9375.00</td><td>40.62</td><td>54.00</td><td>-13.38</td><td>33.16</td><td>7.46</td><td>Average</td><td>100</td><td>167</td></tr><tr><td>4</td><td>9375.00</td><td>53.77</td><td>74.00</td><td>-20.23</td><td>46.31</td><td>7.46</td><td>Peak</td><td>100</td><td>167</td></tr><tr><td>5</td><td>13450.00</td><td>43.30</td><td>68.20</td><td>-24.90</td><td>37.01</td><td>6.29</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>6</td><td>13450.00</td><td>55.50</td><td>88.20</td><td>-32.70</td><td>49.21</td><td>6.29</td><td>Peak</td><td>100</td><td>251</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.40	54.00	-29.60	31.63	-7.23	Average	100	128	2	1600.00	36.29	74.00	-37.71	43.52	-7.23	Peak	100	128	3	9375.00	40.62	54.00	-13.38	33.16	7.46	Average	100	167	4	9375.00	53.77	74.00	-20.23	46.31	7.46	Peak	100	167	5	13450.00	43.30	68.20	-24.90	37.01	6.29	Average	100	251	6	13450.00	55.50	88.20	-32.70	49.21	6.29	Peak	100	251
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.40	54.00	-29.60	31.63	-7.23	Average	100	128																																																																
2	1600.00	36.29	74.00	-37.71	43.52	-7.23	Peak	100	128																																																																
3	9375.00	40.62	54.00	-13.38	33.16	7.46	Average	100	167																																																																
4	9375.00	53.77	74.00	-20.23	46.31	7.46	Peak	100	167																																																																
5	13450.00	43.30	68.20	-24.90	37.01	6.29	Average	100	251																																																																
6	13450.00	55.50	88.20	-32.70	49.21	6.29	Peak	100	251																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT40	Test Freq. (MHz)	6725																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>26.46</td><td>54.00</td><td>-27.54</td><td>33.69</td><td>-7.23</td><td>Average</td><td>100</td><td>255</td></tr><tr><td>2</td><td>1600.00</td><td>37.97</td><td>74.00</td><td>-36.03</td><td>45.20</td><td>-7.23</td><td>Peak</td><td>100</td><td>255</td></tr><tr><td>3</td><td>9375.00</td><td>40.43</td><td>54.00</td><td>-13.57</td><td>32.97</td><td>7.46</td><td>Average</td><td>100</td><td>219</td></tr><tr><td>4</td><td>9375.00</td><td>53.25</td><td>74.00</td><td>-20.75</td><td>45.79</td><td>7.46</td><td>Peak</td><td>100</td><td>219</td></tr><tr><td>5</td><td>13450.00</td><td>43.39</td><td>68.20</td><td>-24.81</td><td>37.10</td><td>6.29</td><td>Average</td><td>100</td><td>158</td></tr><tr><td>6</td><td>13450.00</td><td>55.52</td><td>88.20</td><td>-32.68</td><td>49.23</td><td>6.29</td><td>Peak</td><td>100</td><td>158</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.46	54.00	-27.54	33.69	-7.23	Average	100	255	2	1600.00	37.97	74.00	-36.03	45.20	-7.23	Peak	100	255	3	9375.00	40.43	54.00	-13.57	32.97	7.46	Average	100	219	4	9375.00	53.25	74.00	-20.75	45.79	7.46	Peak	100	219	5	13450.00	43.39	68.20	-24.81	37.10	6.29	Average	100	158	6	13450.00	55.52	88.20	-32.68	49.23	6.29	Peak	100	158
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	26.46	54.00	-27.54	33.69	-7.23	Average	100	255																																																																
2	1600.00	37.97	74.00	-36.03	45.20	-7.23	Peak	100	255																																																																
3	9375.00	40.43	54.00	-13.57	32.97	7.46	Average	100	219																																																																
4	9375.00	53.25	74.00	-20.75	45.79	7.46	Peak	100	219																																																																
5	13450.00	43.39	68.20	-24.81	37.10	6.29	Average	100	158																																																																
6	13450.00	55.52	88.20	-32.68	49.23	6.29	Peak	100	158																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

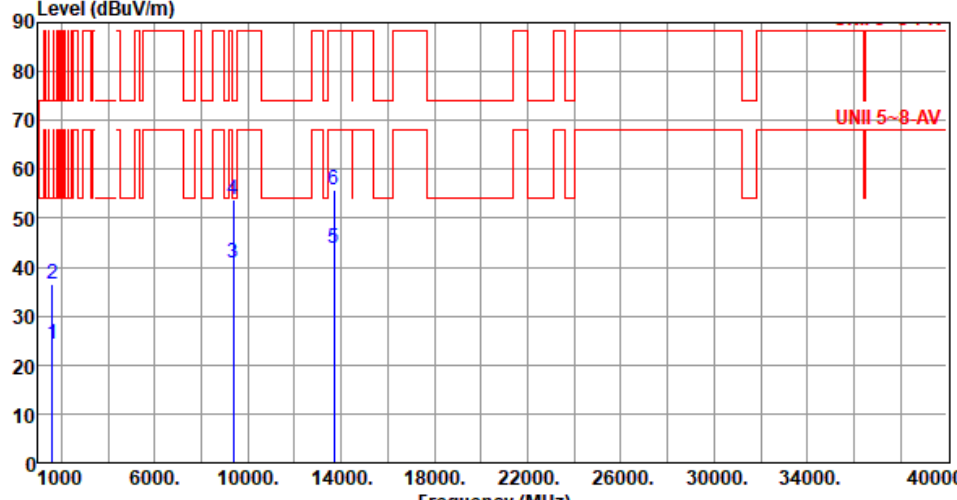

Modulation	be EHT40	Test Freq. (MHz)	6845																																																												
Polarization	Horizontal																																																														
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																															
Level (dBUV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB dBuV dB/m cm Table deg <table><tr><td>1</td><td>1600.00</td><td>24.35</td><td>54.00</td><td>-29.65</td><td>31.58</td><td>-7.23</td><td>Average</td><td>100</td><td>127</td></tr><tr><td>2</td><td>1600.00</td><td>36.46</td><td>74.00</td><td>-37.54</td><td>43.69</td><td>-7.23</td><td>Peak</td><td>100</td><td>127</td></tr><tr><td>3</td><td>9375.00</td><td>40.71</td><td>54.00</td><td>-13.29</td><td>33.25</td><td>7.46</td><td>Average</td><td>100</td><td>165</td></tr><tr><td>4</td><td>9375.00</td><td>53.75</td><td>74.00</td><td>-20.25</td><td>46.29</td><td>7.46</td><td>Peak</td><td>100</td><td>165</td></tr><tr><td>5</td><td>13690.00</td><td>43.82</td><td>68.20</td><td>-24.38</td><td>37.55</td><td>6.27</td><td>Average</td><td>100</td><td>284</td></tr><tr><td>6</td><td>13690.00</td><td>55.84</td><td>88.20</td><td>-32.36</td><td>49.57</td><td>6.27</td><td>Peak</td><td>100</td><td>284</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).				1	1600.00	24.35	54.00	-29.65	31.58	-7.23	Average	100	127	2	1600.00	36.46	74.00	-37.54	43.69	-7.23	Peak	100	127	3	9375.00	40.71	54.00	-13.29	33.25	7.46	Average	100	165	4	9375.00	53.75	74.00	-20.25	46.29	7.46	Peak	100	165	5	13690.00	43.82	68.20	-24.38	37.55	6.27	Average	100	284	6	13690.00	55.84	88.20	-32.36	49.57	6.27	Peak	100	284
1	1600.00	24.35	54.00	-29.65	31.58	-7.23	Average	100	127																																																						
2	1600.00	36.46	74.00	-37.54	43.69	-7.23	Peak	100	127																																																						
3	9375.00	40.71	54.00	-13.29	33.25	7.46	Average	100	165																																																						
4	9375.00	53.75	74.00	-20.25	46.29	7.46	Peak	100	165																																																						
5	13690.00	43.82	68.20	-24.38	37.55	6.27	Average	100	284																																																						
6	13690.00	55.84	88.20	-32.36	49.57	6.27	Peak	100	284																																																						

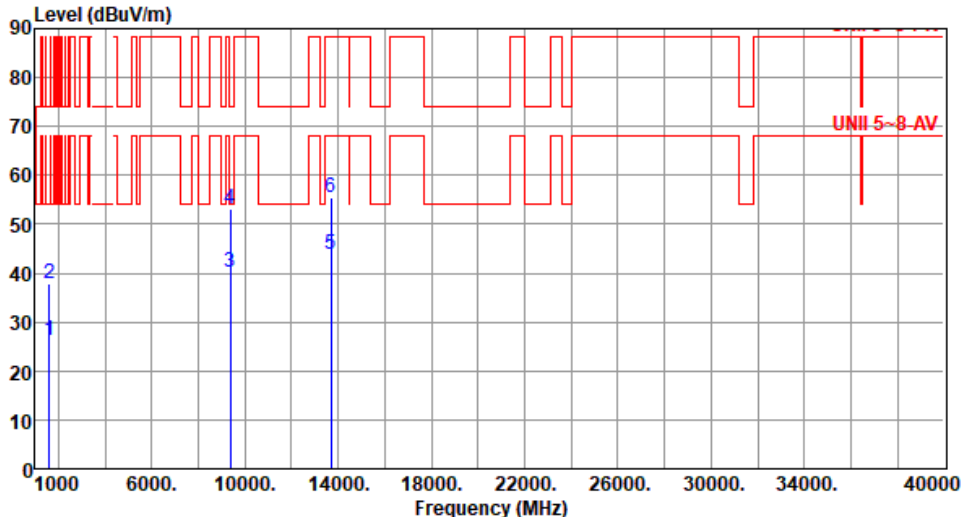


Modulation	be EHT40		Test Freq. (MHz)		6845																																																																																														
Polarization	Vertical																																																																																																		
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1600.00</td><td>26.40</td><td>54.00</td><td>-27.60</td><td>33.63</td><td>-7.23</td><td>Average</td><td>100</td><td>250</td></tr><tr><td>2</td><td>1600.00</td><td>37.86</td><td>74.00</td><td>-36.14</td><td>45.09</td><td>-7.23</td><td>Peak</td><td>100</td><td>250</td></tr><tr><td>3</td><td>9375.00</td><td>40.31</td><td>54.00</td><td>-13.69</td><td>32.85</td><td>7.46</td><td>Average</td><td>100</td><td>214</td></tr><tr><td>4</td><td>9375.00</td><td>53.25</td><td>74.00</td><td>-20.75</td><td>45.79</td><td>7.46</td><td>Peak</td><td>100</td><td>214</td></tr><tr><td>5</td><td>13690.00</td><td>43.73</td><td>68.20</td><td>-24.47</td><td>37.46</td><td>6.27</td><td>Average</td><td>100</td><td>222</td></tr><tr><td>6</td><td>13690.00</td><td>55.58</td><td>88.20</td><td>-32.62</td><td>49.31</td><td>6.27</td><td>Peak</td><td>100</td><td>222</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	1600.00	26.40	54.00	-27.60	33.63	-7.23	Average	100	250	2	1600.00	37.86	74.00	-36.14	45.09	-7.23	Peak	100	250	3	9375.00	40.31	54.00	-13.69	32.85	7.46	Average	100	214	4	9375.00	53.25	74.00	-20.75	45.79	7.46	Peak	100	214	5	13690.00	43.73	68.20	-24.47	37.46	6.27	Average	100	222	6	13690.00	55.58	88.20	-32.62	49.31	6.27	Peak	100	222
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
								cm	deg																																																																																										
1	1600.00	26.40	54.00	-27.60	33.63	-7.23	Average	100	250																																																																																										
2	1600.00	37.86	74.00	-36.14	45.09	-7.23	Peak	100	250																																																																																										
3	9375.00	40.31	54.00	-13.69	32.85	7.46	Average	100	214																																																																																										
4	9375.00	53.25	74.00	-20.75	45.79	7.46	Peak	100	214																																																																																										
5	13690.00	43.73	68.20	-24.47	37.46	6.27	Average	100	222																																																																																										
6	13690.00	55.58	88.20	-32.62	49.31	6.27	Peak	100	222																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			




Modulation	be EHT40	Test Freq. (MHz)	6885																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>24.43</td><td>54.00</td><td>-29.57</td><td>31.66</td><td>-7.23</td><td>Average</td><td>100</td><td>120</td></tr><tr><td>2</td><td>1600.00</td><td>36.32</td><td>74.00</td><td>-37.68</td><td>43.55</td><td>-7.23</td><td>Peak</td><td>100</td><td>120</td></tr><tr><td>3</td><td>9375.00</td><td>40.63</td><td>54.00</td><td>-13.37</td><td>33.17</td><td>7.46</td><td>Average</td><td>100</td><td>157</td></tr><tr><td>4</td><td>9375.00</td><td>53.76</td><td>74.00</td><td>-20.24</td><td>46.30</td><td>7.46</td><td>Peak</td><td>100</td><td>157</td></tr><tr><td>5</td><td>13770.00</td><td>43.86</td><td>68.20</td><td>-24.34</td><td>37.58</td><td>6.28</td><td>Average</td><td>100</td><td>261</td></tr><tr><td>6</td><td>13770.00</td><td>55.91</td><td>88.20</td><td>-32.29</td><td>49.63</td><td>6.28</td><td>Peak</td><td>100</td><td>261</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.43	54.00	-29.57	31.66	-7.23	Average	100	120	2	1600.00	36.32	74.00	-37.68	43.55	-7.23	Peak	100	120	3	9375.00	40.63	54.00	-13.37	33.17	7.46	Average	100	157	4	9375.00	53.76	74.00	-20.24	46.30	7.46	Peak	100	157	5	13770.00	43.86	68.20	-24.34	37.58	6.28	Average	100	261	6	13770.00	55.91	88.20	-32.29	49.63	6.28	Peak	100	261
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.43	54.00	-29.57	31.66	-7.23	Average	100	120																																																																
2	1600.00	36.32	74.00	-37.68	43.55	-7.23	Peak	100	120																																																																
3	9375.00	40.63	54.00	-13.37	33.17	7.46	Average	100	157																																																																
4	9375.00	53.76	74.00	-20.24	46.30	7.46	Peak	100	157																																																																
5	13770.00	43.86	68.20	-24.34	37.58	6.28	Average	100	261																																																																
6	13770.00	55.91	88.20	-32.29	49.63	6.28	Peak	100	261																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

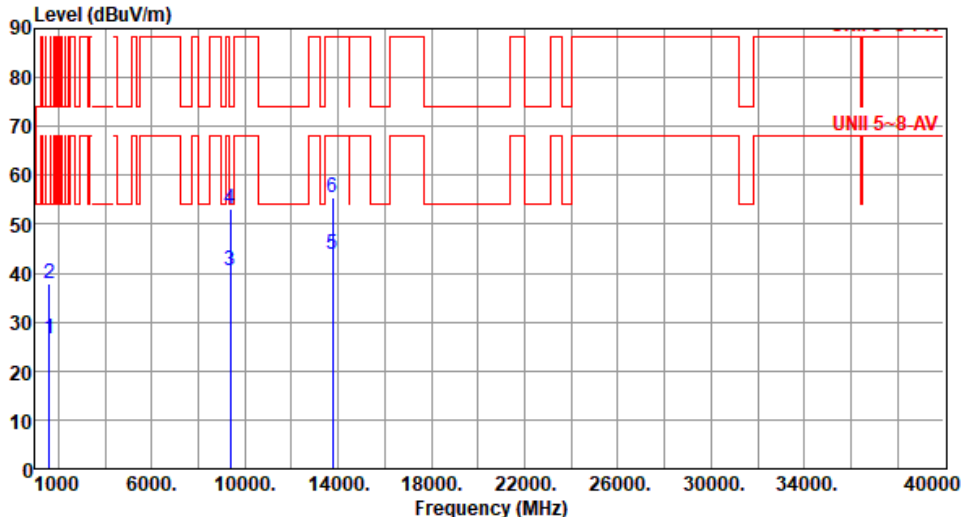


Modulation	be EHT40		Test Freq. (MHz)		6885																																																																																														
Polarization	Vertical																																																																																																		
Test By :Allen Lee			Temperature(°C):23			Humidity(%):63																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1600.00</td><td>26.46</td><td>54.00</td><td>-27.54</td><td>33.69</td><td>-7.23</td><td>Average</td><td>100</td><td>263</td></tr><tr><td>2</td><td>1600.00</td><td>37.97</td><td>74.00</td><td>-36.03</td><td>45.20</td><td>-7.23</td><td>Peak</td><td>100</td><td>263</td></tr><tr><td>3</td><td>9375.00</td><td>40.36</td><td>54.00</td><td>-13.64</td><td>32.90</td><td>7.46</td><td>Average</td><td>100</td><td>201</td></tr><tr><td>4</td><td>9375.00</td><td>53.19</td><td>74.00</td><td>-20.81</td><td>45.73</td><td>7.46</td><td>Peak</td><td>100</td><td>201</td></tr><tr><td>5</td><td>13770.00</td><td>43.77</td><td>68.20</td><td>-24.43</td><td>37.49</td><td>6.28</td><td>Average</td><td>100</td><td>257</td></tr><tr><td>6</td><td>13770.00</td><td>55.61</td><td>88.20</td><td>-32.59</td><td>49.33</td><td>6.28</td><td>Peak</td><td>100</td><td>257</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	1600.00	26.46	54.00	-27.54	33.69	-7.23	Average	100	263	2	1600.00	37.97	74.00	-36.03	45.20	-7.23	Peak	100	263	3	9375.00	40.36	54.00	-13.64	32.90	7.46	Average	100	201	4	9375.00	53.19	74.00	-20.81	45.73	7.46	Peak	100	201	5	13770.00	43.77	68.20	-24.43	37.49	6.28	Average	100	257	6	13770.00	55.61	88.20	-32.59	49.33	6.28	Peak	100	257
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
								cm	deg																																																																																										
1	1600.00	26.46	54.00	-27.54	33.69	-7.23	Average	100	263																																																																																										
2	1600.00	37.97	74.00	-36.03	45.20	-7.23	Peak	100	263																																																																																										
3	9375.00	40.36	54.00	-13.64	32.90	7.46	Average	100	201																																																																																										
4	9375.00	53.19	74.00	-20.81	45.73	7.46	Peak	100	201																																																																																										
5	13770.00	43.77	68.20	-24.43	37.49	6.28	Average	100	257																																																																																										
6	13770.00	55.61	88.20	-32.59	49.33	6.28	Peak	100	257																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			

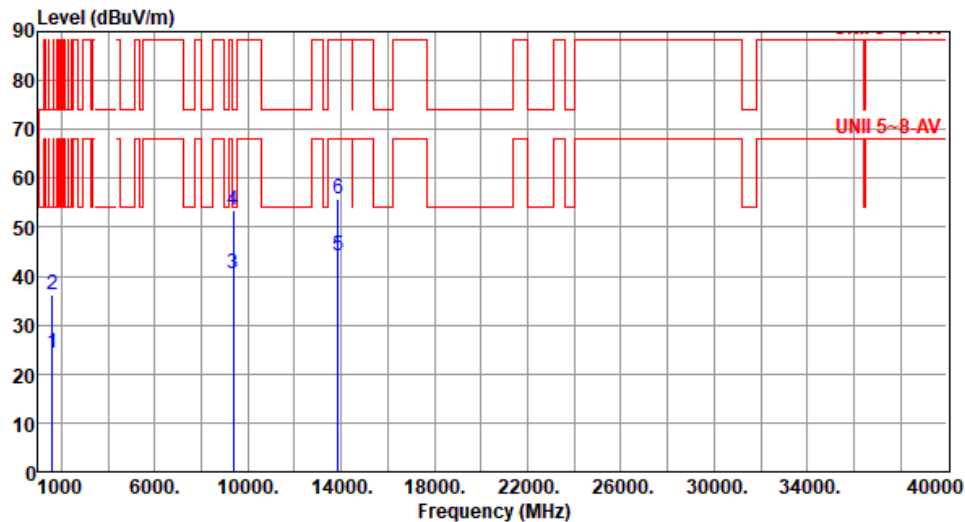


Modulation	be EHT40	Test Freq. (MHz)	6925						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	24.40	54.00	-29.60	31.63	-7.23	Average	100	123
2	1600.00	36.30	74.00	-37.70	43.53	-7.23	Peak	100	123
3	9375.00	40.64	54.00	-13.36	33.18	7.46	Average	100	159
4	9375.00	53.63	74.00	-20.37	46.17	7.46	Peak	100	159
5	13850.00	44.03	68.20	-24.17	37.75	6.28	Average	100	154
6	13850.00	55.85	88.20	-32.35	49.57	6.28	Peak	100	154
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

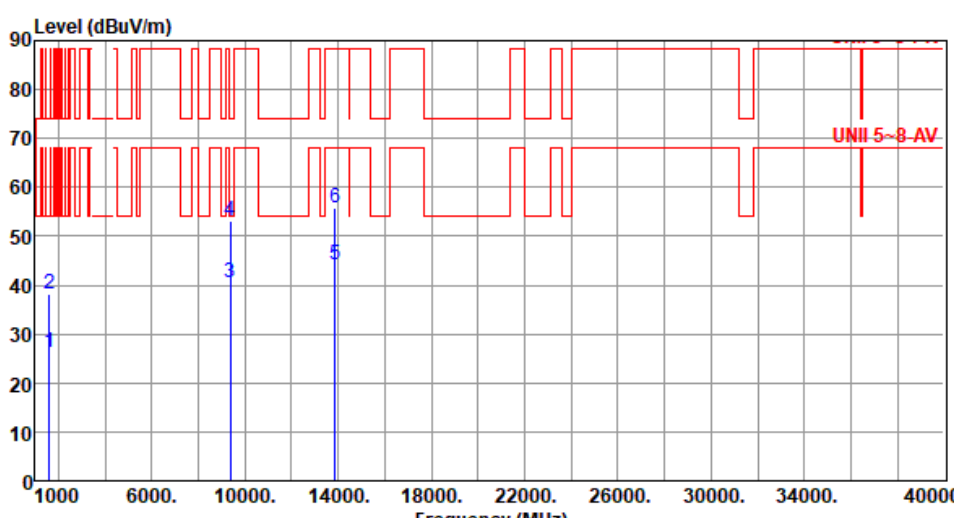


Modulation	be EHT40	Test Freq. (MHz)	6925						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	26.33	54.00	-27.67	33.56	-7.23	Average	100	264
2	1600.00	38.14	74.00	-35.86	45.37	-7.23	Peak	100	264
3	9375.00	40.36	54.00	-13.64	32.90	7.46	Average	100	201
4	9375.00	53.22	74.00	-20.78	45.76	7.46	Peak	100	201
5	13850.00	44.12	68.20	-24.08	37.84	6.28	Average	100	245
6	13850.00	55.83	88.20	-32.37	49.55	6.28	Peak	100	245
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

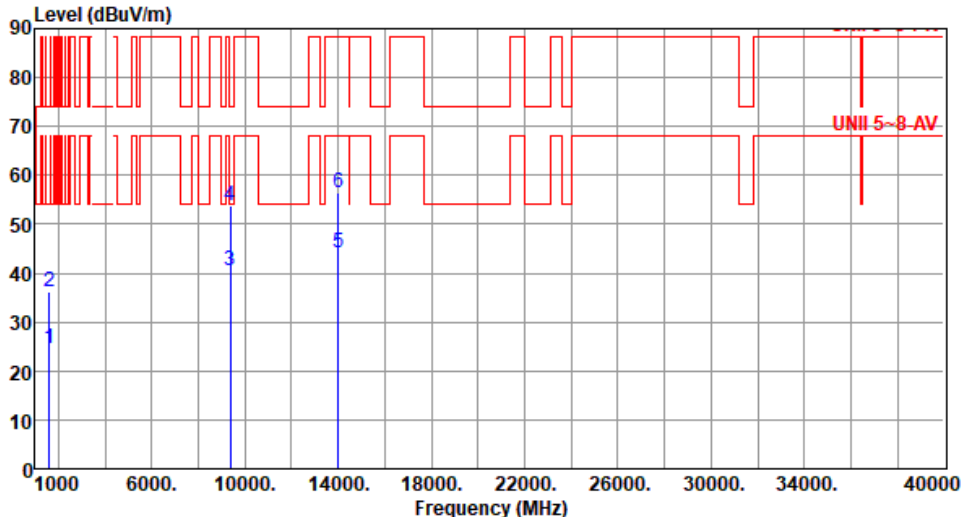

Modulation	be EHT40		Test Freq. (MHz)		7005																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																																																			
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1600.00</td><td>24.44</td><td>54.00</td><td>-29.56</td><td>31.67</td><td>-7.23</td><td>Average</td><td>100</td><td>122</td></tr><tr><td>2</td><td>1600.00</td><td>36.30</td><td>74.00</td><td>-37.70</td><td>43.53</td><td>-7.23</td><td>Peak</td><td>100</td><td>122</td></tr><tr><td>3</td><td>9375.00</td><td>40.54</td><td>54.00</td><td>-13.46</td><td>33.08</td><td>7.46</td><td>Average</td><td>100</td><td>158</td></tr><tr><td>4</td><td>9375.00</td><td>53.65</td><td>74.00</td><td>-20.35</td><td>46.19</td><td>7.46</td><td>Peak</td><td>100</td><td>158</td></tr><tr><td>5</td><td>14010.00</td><td>44.24</td><td>68.20</td><td>-23.96</td><td>37.45</td><td>6.79</td><td>Average</td><td>100</td><td>258</td></tr><tr><td>6</td><td>14010.00</td><td>56.36</td><td>88.20</td><td>-31.84</td><td>49.57</td><td>6.79</td><td>Peak</td><td>100</td><td>258</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table						dBuV			cm	deg	1	1600.00	24.44	54.00	-29.56	31.67	-7.23	Average	100	122	2	1600.00	36.30	74.00	-37.70	43.53	-7.23	Peak	100	122	3	9375.00	40.54	54.00	-13.46	33.08	7.46	Average	100	158	4	9375.00	53.65	74.00	-20.35	46.19	7.46	Peak	100	158	5	14010.00	44.24	68.20	-23.96	37.45	6.79	Average	100	258	6	14010.00	56.36	88.20	-31.84	49.57	6.79	Peak	100	258
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																																																										
					dBuV			cm	deg																																																																																										
1	1600.00	24.44	54.00	-29.56	31.67	-7.23	Average	100	122																																																																																										
2	1600.00	36.30	74.00	-37.70	43.53	-7.23	Peak	100	122																																																																																										
3	9375.00	40.54	54.00	-13.46	33.08	7.46	Average	100	158																																																																																										
4	9375.00	53.65	74.00	-20.35	46.19	7.46	Peak	100	158																																																																																										
5	14010.00	44.24	68.20	-23.96	37.45	6.79	Average	100	258																																																																																										
6	14010.00	56.36	88.20	-31.84	49.57	6.79	Peak	100	258																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			

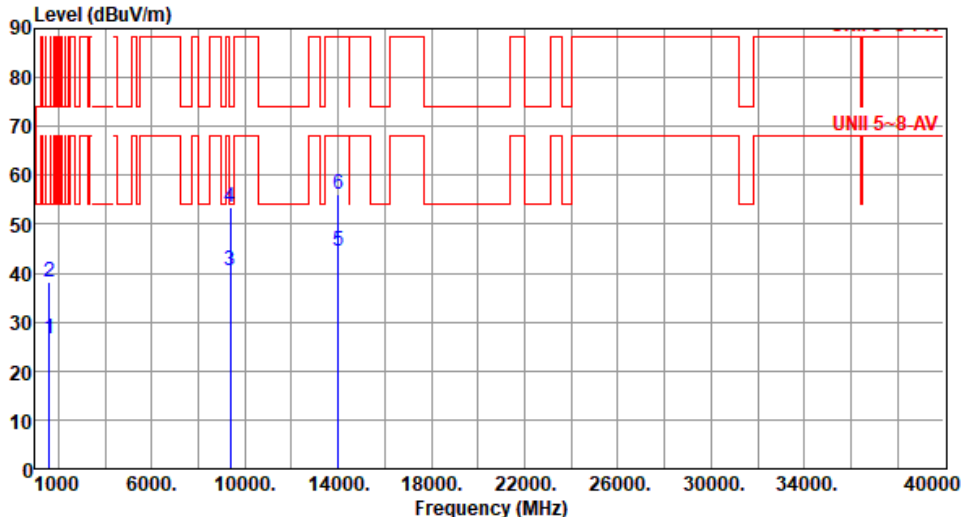

Modulation	be EHT40	Test Freq. (MHz)	7005						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	26.47	54.00	-27.53	33.70	-7.23	Average	100	271
2	1600.00	38.04	74.00	-35.96	45.27	-7.23	Peak	100	271
3	9375.00	40.45	54.00	-13.55	32.99	7.46	Average	100	209
4	9375.00	53.43	74.00	-20.57	45.97	7.46	Peak	100	209
5	14010.00	44.43	68.20	-23.77	37.64	6.79	Average	100	268
6	14010.00	56.17	88.20	-32.03	49.38	6.79	Peak	100	268
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	be EHT40	Test Freq. (MHz)	7085																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>24.32</td><td>54.00</td><td>-29.68</td><td>31.55</td><td>-7.23</td><td>Average</td><td>100</td><td>109</td></tr><tr><td>2</td><td>1600.00</td><td>36.44</td><td>74.00</td><td>-37.56</td><td>43.67</td><td>-7.23</td><td>Peak</td><td>100</td><td>109</td></tr><tr><td>3</td><td>7125.00</td><td>48.08</td><td>68.20</td><td>-20.12</td><td>42.90</td><td>5.18</td><td>Average</td><td>233</td><td>247</td></tr><tr><td>4</td><td>7125.00</td><td>62.26</td><td>88.20</td><td>-25.94</td><td>57.08</td><td>5.18</td><td>Peak</td><td>233</td><td>247</td></tr><tr><td>5</td><td>14170.00</td><td>43.77</td><td>68.20</td><td>-24.43</td><td>36.60</td><td>7.17</td><td>Average</td><td>100</td><td>197</td></tr><tr><td>6</td><td>14170.00</td><td>57.66</td><td>88.20</td><td>-30.54</td><td>50.49</td><td>7.17</td><td>Peak</td><td>100</td><td>197</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.32	54.00	-29.68	31.55	-7.23	Average	100	109	2	1600.00	36.44	74.00	-37.56	43.67	-7.23	Peak	100	109	3	7125.00	48.08	68.20	-20.12	42.90	5.18	Average	233	247	4	7125.00	62.26	88.20	-25.94	57.08	5.18	Peak	233	247	5	14170.00	43.77	68.20	-24.43	36.60	7.17	Average	100	197	6	14170.00	57.66	88.20	-30.54	50.49	7.17	Peak	100	197
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.32	54.00	-29.68	31.55	-7.23	Average	100	109																																																																
2	1600.00	36.44	74.00	-37.56	43.67	-7.23	Peak	100	109																																																																
3	7125.00	48.08	68.20	-20.12	42.90	5.18	Average	233	247																																																																
4	7125.00	62.26	88.20	-25.94	57.08	5.18	Peak	233	247																																																																
5	14170.00	43.77	68.20	-24.43	36.60	7.17	Average	100	197																																																																
6	14170.00	57.66	88.20	-30.54	50.49	7.17	Peak	100	197																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT40	Test Freq. (MHz)	7085																																																															
Polarization	Vertical																																																																	
Test By :Allen Lee Temperature(°C):22 Humidity(%):64																																																																		
Level (dBuV/m) <table><thead><tr><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>26.11</td><td>54.00</td><td>-27.89</td><td>33.34</td><td>-7.23</td><td>Average</td><td>100 237</td></tr><tr><td>2</td><td>1600.00</td><td>37.78</td><td>74.00</td><td>-36.22</td><td>45.01</td><td>-7.23</td><td>Peak</td><td>100 237</td></tr><tr><td>3</td><td>7125.00</td><td>47.90</td><td>68.20</td><td>-20.30</td><td>42.72</td><td>5.18</td><td>Average</td><td>185 261</td></tr><tr><td>4</td><td>7125.00</td><td>60.68</td><td>88.20</td><td>-27.52</td><td>55.50</td><td>5.18</td><td>Peak</td><td>185 261</td></tr><tr><td>5</td><td>14170.00</td><td>44.73</td><td>68.20</td><td>-23.47</td><td>37.56</td><td>7.17</td><td>Average</td><td>100 261</td></tr><tr><td>6</td><td>14170.00</td><td>58.58</td><td>88.20</td><td>-29.62</td><td>51.41</td><td>7.17</td><td>Peak</td><td>100 261</td></tr></tbody></table>				Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.11	54.00	-27.89	33.34	-7.23	Average	100 237	2	1600.00	37.78	74.00	-36.22	45.01	-7.23	Peak	100 237	3	7125.00	47.90	68.20	-20.30	42.72	5.18	Average	185 261	4	7125.00	60.68	88.20	-27.52	55.50	5.18	Peak	185 261	5	14170.00	44.73	68.20	-23.47	37.56	7.17	Average	100 261	6	14170.00	58.58	88.20	-29.62	51.41	7.17	Peak	100 261
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																										
1	1600.00	26.11	54.00	-27.89	33.34	-7.23	Average	100 237																																																										
2	1600.00	37.78	74.00	-36.22	45.01	-7.23	Peak	100 237																																																										
3	7125.00	47.90	68.20	-20.30	42.72	5.18	Average	185 261																																																										
4	7125.00	60.68	88.20	-27.52	55.50	5.18	Peak	185 261																																																										
5	14170.00	44.73	68.20	-23.47	37.56	7.17	Average	100 261																																																										
6	14170.00	58.58	88.20	-29.62	51.41	7.17	Peak	100 261																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																		

Unwanted Emissions (Above 1GHz) for be EHT80

Modulation	be EHT80	Test Freq. (MHz)	5985
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):22 Humidity(%):64			
Level (dBUV/m) <			

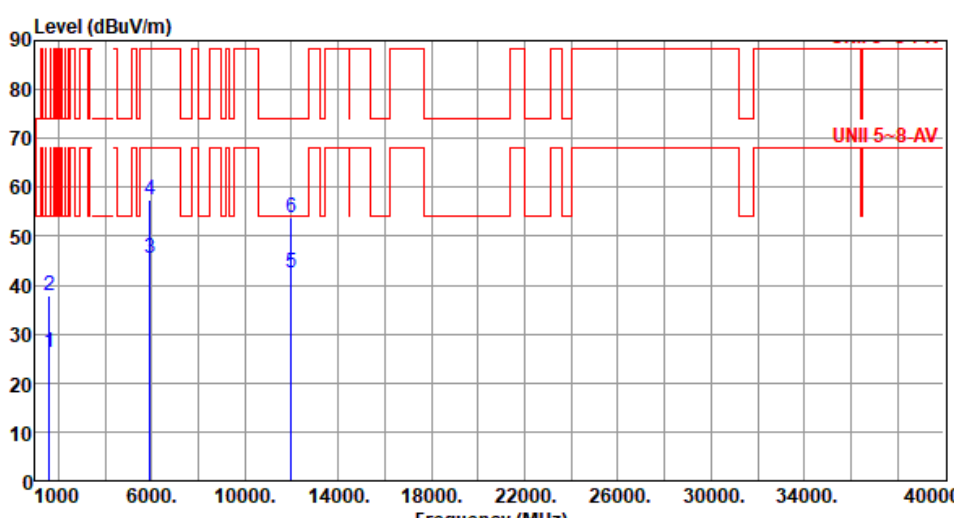


Modulation	be EHT80		Test Freq. (MHz)		5985																																																																										
Polarization	Vertical																																																																														
Test By :Allen Lee Temperature(°C):22 Humidity(%):64																																																																															
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>26.29</td><td>54.00</td><td>-27.71</td><td>33.52</td><td>-7.23</td><td>Average</td><td>100</td><td>252</td></tr><tr><td>2</td><td>1600.00</td><td>37.96</td><td>74.00</td><td>-36.04</td><td>45.19</td><td>-7.23</td><td>Peak</td><td>100</td><td>252</td></tr><tr><td>3</td><td>5925.00</td><td>45.48</td><td>68.20</td><td>-22.72</td><td>44.31</td><td>1.17</td><td>Average</td><td>167</td><td>245</td></tr><tr><td>4</td><td>5925.00</td><td>57.40</td><td>88.20</td><td>-30.80</td><td>56.23</td><td>1.17</td><td>Peak</td><td>167</td><td>245</td></tr><tr><td>5</td><td>11970.00</td><td>42.34</td><td>54.00</td><td>-11.66</td><td>35.83</td><td>6.51</td><td>Average</td><td>100</td><td>166</td></tr><tr><td>6</td><td>11970.00</td><td>53.67</td><td>74.00</td><td>-20.33</td><td>47.16</td><td>6.51</td><td>Peak</td><td>100</td><td>166</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.29	54.00	-27.71	33.52	-7.23	Average	100	252	2	1600.00	37.96	74.00	-36.04	45.19	-7.23	Peak	100	252	3	5925.00	45.48	68.20	-22.72	44.31	1.17	Average	167	245	4	5925.00	57.40	88.20	-30.80	56.23	1.17	Peak	167	245	5	11970.00	42.34	54.00	-11.66	35.83	6.51	Average	100	166	6	11970.00	53.67	74.00	-20.33	47.16	6.51	Peak	100	166
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1600.00	26.29	54.00	-27.71	33.52	-7.23	Average	100	252																																																																						
2	1600.00	37.96	74.00	-36.04	45.19	-7.23	Peak	100	252																																																																						
3	5925.00	45.48	68.20	-22.72	44.31	1.17	Average	167	245																																																																						
4	5925.00	57.40	88.20	-30.80	56.23	1.17	Peak	167	245																																																																						
5	11970.00	42.34	54.00	-11.66	35.83	6.51	Average	100	166																																																																						
6	11970.00	53.67	74.00	-20.33	47.16	6.51	Peak	100	166																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															




Modulation	be EHT80	Test Freq. (MHz)	6145																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>24.36</td><td>54.00</td><td>-29.64</td><td>31.59</td><td>-7.23</td><td>Average</td><td>100</td><td>123</td></tr><tr><td>2</td><td>1600.00</td><td>36.37</td><td>74.00</td><td>-37.63</td><td>43.60</td><td>-7.23</td><td>Peak</td><td>100</td><td>123</td></tr><tr><td>3</td><td>9375.00</td><td>40.47</td><td>54.00</td><td>-13.53</td><td>33.01</td><td>7.46</td><td>Average</td><td>100</td><td>162</td></tr><tr><td>4</td><td>9375.00</td><td>53.68</td><td>74.00</td><td>-20.32</td><td>46.22</td><td>7.46</td><td>Peak</td><td>100</td><td>162</td></tr><tr><td>5</td><td>12290.00</td><td>43.15</td><td>54.00</td><td>-10.85</td><td>35.96</td><td>7.19</td><td>Average</td><td>100</td><td>6</td></tr><tr><td>6</td><td>12290.00</td><td>54.77</td><td>74.00</td><td>-19.23</td><td>47.58</td><td>7.19</td><td>Peak</td><td>100</td><td>6</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.36	54.00	-29.64	31.59	-7.23	Average	100	123	2	1600.00	36.37	74.00	-37.63	43.60	-7.23	Peak	100	123	3	9375.00	40.47	54.00	-13.53	33.01	7.46	Average	100	162	4	9375.00	53.68	74.00	-20.32	46.22	7.46	Peak	100	162	5	12290.00	43.15	54.00	-10.85	35.96	7.19	Average	100	6	6	12290.00	54.77	74.00	-19.23	47.58	7.19	Peak	100	6
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.36	54.00	-29.64	31.59	-7.23	Average	100	123																																																																
2	1600.00	36.37	74.00	-37.63	43.60	-7.23	Peak	100	123																																																																
3	9375.00	40.47	54.00	-13.53	33.01	7.46	Average	100	162																																																																
4	9375.00	53.68	74.00	-20.32	46.22	7.46	Peak	100	162																																																																
5	12290.00	43.15	54.00	-10.85	35.96	7.19	Average	100	6																																																																
6	12290.00	54.77	74.00	-19.23	47.58	7.19	Peak	100	6																																																																

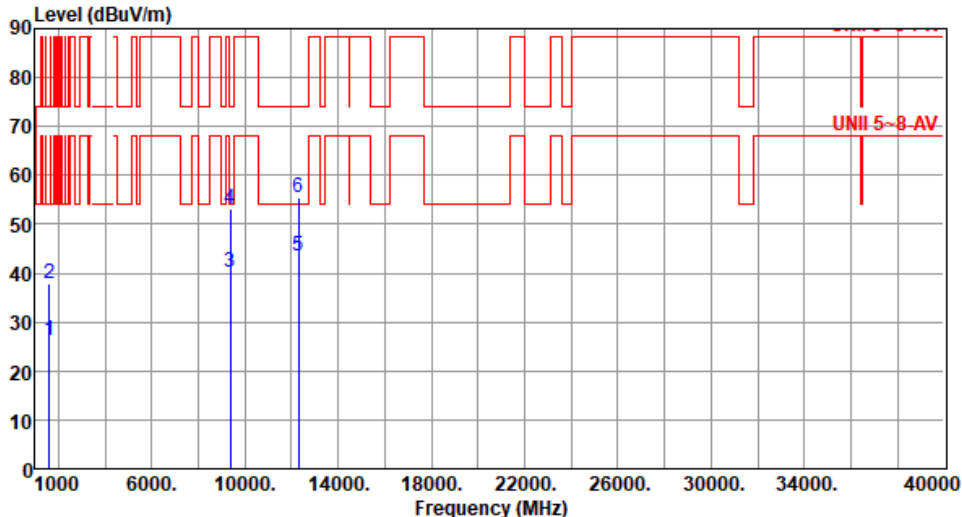

Modulation	be EHT80		Test Freq. (MHz)		6145																																																																																														
Polarization	Vertical																																																																																																		
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1600.00</td><td>26.32</td><td>54.00</td><td>-27.68</td><td>33.55</td><td>-7.23</td><td>Average</td><td>100</td><td>256</td></tr><tr><td>2</td><td>1600.00</td><td>37.87</td><td>74.00</td><td>-36.13</td><td>45.10</td><td>-7.23</td><td>Peak</td><td>100</td><td>256</td></tr><tr><td>3</td><td>9375.00</td><td>40.34</td><td>54.00</td><td>-13.66</td><td>32.88</td><td>7.46</td><td>Average</td><td>100</td><td>206</td></tr><tr><td>4</td><td>9375.00</td><td>53.26</td><td>74.00</td><td>-20.74</td><td>45.80</td><td>7.46</td><td>Peak</td><td>100</td><td>206</td></tr><tr><td>5</td><td>12290.00</td><td>43.52</td><td>54.00</td><td>-10.48</td><td>36.33</td><td>7.19</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>6</td><td>12290.00</td><td>55.42</td><td>74.00</td><td>-18.58</td><td>48.23</td><td>7.19</td><td>Peak</td><td>100</td><td>251</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	1600.00	26.32	54.00	-27.68	33.55	-7.23	Average	100	256	2	1600.00	37.87	74.00	-36.13	45.10	-7.23	Peak	100	256	3	9375.00	40.34	54.00	-13.66	32.88	7.46	Average	100	206	4	9375.00	53.26	74.00	-20.74	45.80	7.46	Peak	100	206	5	12290.00	43.52	54.00	-10.48	36.33	7.19	Average	100	251	6	12290.00	55.42	74.00	-18.58	48.23	7.19	Peak	100	251
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
								cm	deg																																																																																										
1	1600.00	26.32	54.00	-27.68	33.55	-7.23	Average	100	256																																																																																										
2	1600.00	37.87	74.00	-36.13	45.10	-7.23	Peak	100	256																																																																																										
3	9375.00	40.34	54.00	-13.66	32.88	7.46	Average	100	206																																																																																										
4	9375.00	53.26	74.00	-20.74	45.80	7.46	Peak	100	206																																																																																										
5	12290.00	43.52	54.00	-10.48	36.33	7.19	Average	100	251																																																																																										
6	12290.00	55.42	74.00	-18.58	48.23	7.19	Peak	100	251																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			

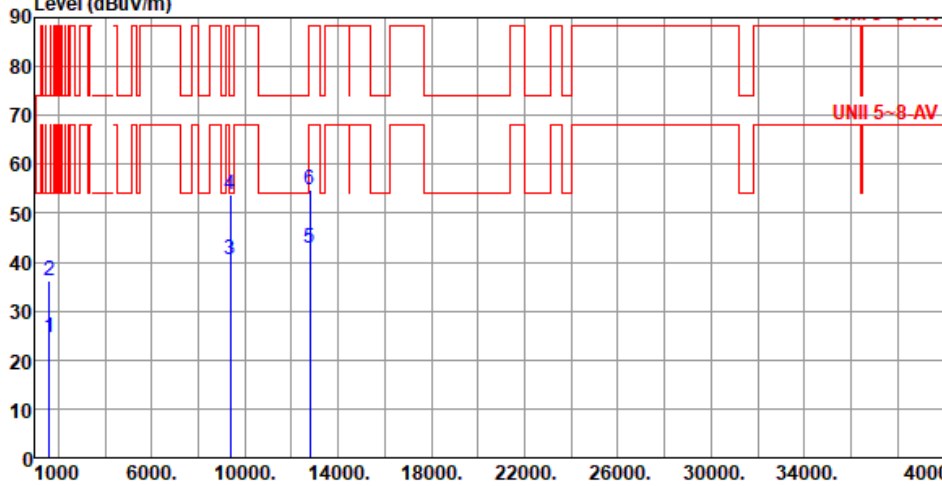

Modulation	be EHT80	Test Freq. (MHz)	6385																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>24.43</td><td>54.00</td><td>-29.57</td><td>31.66</td><td>-7.23</td><td>Average</td><td>100</td><td>127</td></tr><tr><td>2</td><td>1600.00</td><td>36.30</td><td>74.00</td><td>-37.70</td><td>43.53</td><td>-7.23</td><td>Peak</td><td>100</td><td>127</td></tr><tr><td>3</td><td>9375.00</td><td>40.57</td><td>54.00</td><td>-13.43</td><td>33.11</td><td>7.46</td><td>Average</td><td>100</td><td>161</td></tr><tr><td>4</td><td>9375.00</td><td>53.75</td><td>74.00</td><td>-20.25</td><td>46.29</td><td>7.46</td><td>Peak</td><td>100</td><td>161</td></tr><tr><td>5</td><td>12770.00</td><td>42.78</td><td>68.20</td><td>-25.42</td><td>36.04</td><td>6.74</td><td>Average</td><td>100</td><td>260</td></tr><tr><td>6</td><td>12770.00</td><td>54.65</td><td>88.20</td><td>-33.55</td><td>47.91</td><td>6.74</td><td>Peak</td><td>100</td><td>260</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.43	54.00	-29.57	31.66	-7.23	Average	100	127	2	1600.00	36.30	74.00	-37.70	43.53	-7.23	Peak	100	127	3	9375.00	40.57	54.00	-13.43	33.11	7.46	Average	100	161	4	9375.00	53.75	74.00	-20.25	46.29	7.46	Peak	100	161	5	12770.00	42.78	68.20	-25.42	36.04	6.74	Average	100	260	6	12770.00	54.65	88.20	-33.55	47.91	6.74	Peak	100	260
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.43	54.00	-29.57	31.66	-7.23	Average	100	127																																																																
2	1600.00	36.30	74.00	-37.70	43.53	-7.23	Peak	100	127																																																																
3	9375.00	40.57	54.00	-13.43	33.11	7.46	Average	100	161																																																																
4	9375.00	53.75	74.00	-20.25	46.29	7.46	Peak	100	161																																																																
5	12770.00	42.78	68.20	-25.42	36.04	6.74	Average	100	260																																																																
6	12770.00	54.65	88.20	-33.55	47.91	6.74	Peak	100	260																																																																




Modulation	be EHT80	Test Freq. (MHz)	6385																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>26.37</td><td>54.00</td><td>-27.63</td><td>33.60</td><td>-7.23</td><td>Average</td><td>100</td><td>252</td></tr><tr><td>2</td><td>1600.00</td><td>37.97</td><td>74.00</td><td>-36.03</td><td>45.20</td><td>-7.23</td><td>Peak</td><td>100</td><td>252</td></tr><tr><td>3</td><td>9375.00</td><td>41.37</td><td>54.00</td><td>-12.63</td><td>33.91</td><td>7.46</td><td>Average</td><td>100</td><td>200</td></tr><tr><td>4</td><td>9375.00</td><td>53.12</td><td>74.00</td><td>-20.88</td><td>45.66</td><td>7.46</td><td>Peak</td><td>100</td><td>200</td></tr><tr><td>5</td><td>12770.00</td><td>42.46</td><td>68.20</td><td>-25.74</td><td>35.72</td><td>6.74</td><td>Average</td><td>100</td><td>152</td></tr><tr><td>6</td><td>12770.00</td><td>55.08</td><td>88.20</td><td>-33.12</td><td>48.34</td><td>6.74</td><td>Peak</td><td>100</td><td>152</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.37	54.00	-27.63	33.60	-7.23	Average	100	252	2	1600.00	37.97	74.00	-36.03	45.20	-7.23	Peak	100	252	3	9375.00	41.37	54.00	-12.63	33.91	7.46	Average	100	200	4	9375.00	53.12	74.00	-20.88	45.66	7.46	Peak	100	200	5	12770.00	42.46	68.20	-25.74	35.72	6.74	Average	100	152	6	12770.00	55.08	88.20	-33.12	48.34	6.74	Peak	100	152
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	26.37	54.00	-27.63	33.60	-7.23	Average	100	252																																																																
2	1600.00	37.97	74.00	-36.03	45.20	-7.23	Peak	100	252																																																																
3	9375.00	41.37	54.00	-12.63	33.91	7.46	Average	100	200																																																																
4	9375.00	53.12	74.00	-20.88	45.66	7.46	Peak	100	200																																																																
5	12770.00	42.46	68.20	-25.74	35.72	6.74	Average	100	152																																																																
6	12770.00	55.08	88.20	-33.12	48.34	6.74	Peak	100	152																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT80	Test Freq. (MHz)	6465
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):23 Humidity(%):63			
Level (dBUV/m)			

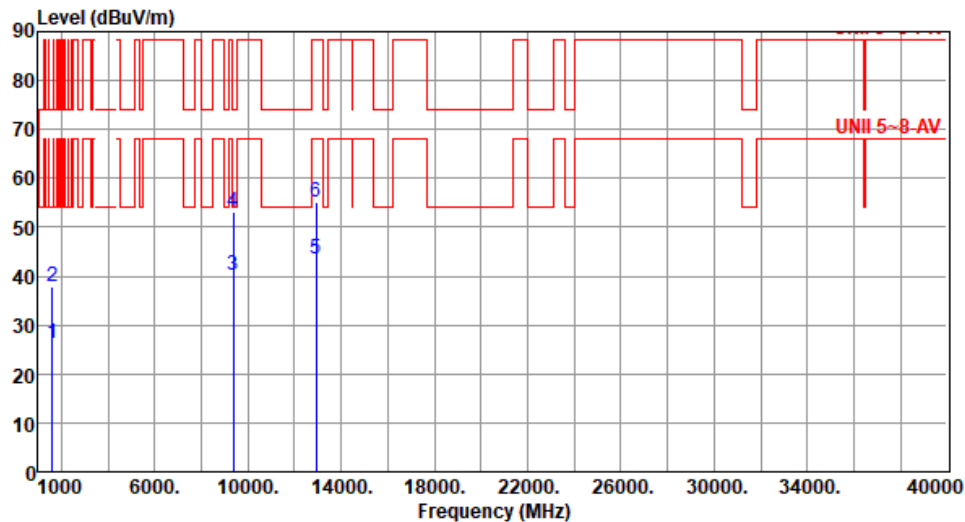

Modulation	be EHT80	Test Freq. (MHz)	6465																																																																							
Polarization	Vertical																																																																									
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																										
																																																																										
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>26.36</td><td>54.00</td><td>-27.64</td><td>33.59</td><td>-7.23</td><td>Average</td><td>100</td><td>249</td></tr><tr><td>2</td><td>1600.00</td><td>37.84</td><td>74.00</td><td>-36.16</td><td>45.07</td><td>-7.23</td><td>Peak</td><td>100</td><td>249</td></tr><tr><td>3</td><td>9375.00</td><td>40.22</td><td>54.00</td><td>-13.78</td><td>32.76</td><td>7.46</td><td>Average</td><td>100</td><td>203</td></tr><tr><td>4</td><td>9375.00</td><td>53.23</td><td>74.00</td><td>-20.77</td><td>45.77</td><td>7.46</td><td>Peak</td><td>100</td><td>203</td></tr><tr><td>5</td><td>12930.00</td><td>43.52</td><td>68.20</td><td>-24.68</td><td>36.83</td><td>6.69</td><td>Average</td><td>100</td><td>260</td></tr><tr><td>6</td><td>12930.00</td><td>55.07</td><td>88.20</td><td>-33.13</td><td>48.38</td><td>6.69</td><td>Peak</td><td>100</td><td>260</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.36	54.00	-27.64	33.59	-7.23	Average	100	249	2	1600.00	37.84	74.00	-36.16	45.07	-7.23	Peak	100	249	3	9375.00	40.22	54.00	-13.78	32.76	7.46	Average	100	203	4	9375.00	53.23	74.00	-20.77	45.77	7.46	Peak	100	203	5	12930.00	43.52	68.20	-24.68	36.83	6.69	Average	100	260	6	12930.00	55.07	88.20	-33.13	48.38	6.69	Peak	100	260			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																	
1	1600.00	26.36	54.00	-27.64	33.59	-7.23	Average	100	249																																																																	
2	1600.00	37.84	74.00	-36.16	45.07	-7.23	Peak	100	249																																																																	
3	9375.00	40.22	54.00	-13.78	32.76	7.46	Average	100	203																																																																	
4	9375.00	53.23	74.00	-20.77	45.77	7.46	Peak	100	203																																																																	
5	12930.00	43.52	68.20	-24.68	36.83	6.69	Average	100	260																																																																	
6	12930.00	55.07	88.20	-33.13	48.38	6.69	Peak	100	260																																																																	
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																										

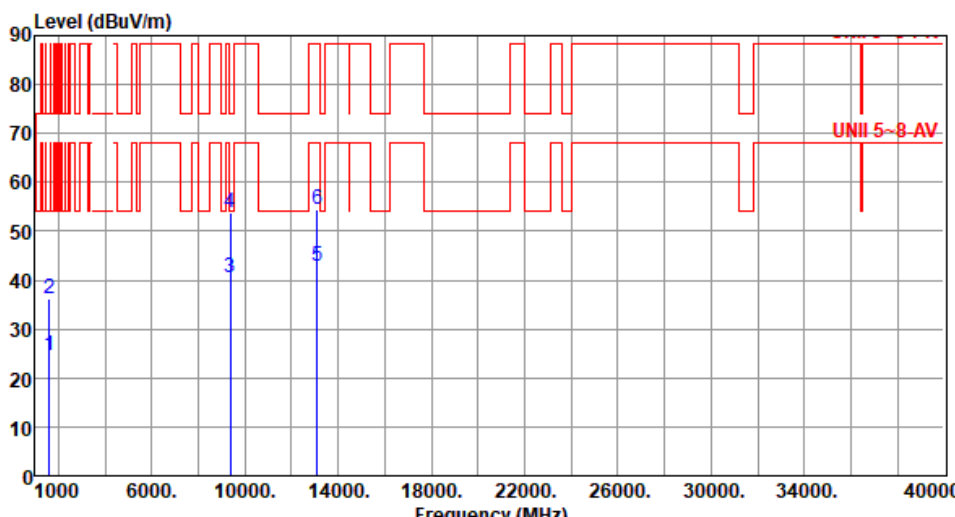

Modulation	be EHT80	Test Freq. (MHz)	6545																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>24.52</td><td>54.00</td><td>-29.48</td><td>31.75</td><td>-7.23</td><td>Average</td><td>100</td><td>117</td></tr><tr><td>2</td><td>1600.00</td><td>36.29</td><td>74.00</td><td>-37.71</td><td>43.52</td><td>-7.23</td><td>Peak</td><td>100</td><td>117</td></tr><tr><td>3</td><td>9375.00</td><td>40.65</td><td>54.00</td><td>-13.35</td><td>33.19</td><td>7.46</td><td>Average</td><td>100</td><td>159</td></tr><tr><td>4</td><td>9375.00</td><td>53.74</td><td>74.00</td><td>-20.26</td><td>46.28</td><td>7.46</td><td>Peak</td><td>100</td><td>159</td></tr><tr><td>5</td><td>13090.00</td><td>42.87</td><td>68.20</td><td>-25.33</td><td>36.81</td><td>6.06</td><td>Average</td><td>100</td><td>260</td></tr><tr><td>6</td><td>13090.00</td><td>54.45</td><td>88.20</td><td>-33.75</td><td>48.39</td><td>6.06</td><td>Peak</td><td>100</td><td>260</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.52	54.00	-29.48	31.75	-7.23	Average	100	117	2	1600.00	36.29	74.00	-37.71	43.52	-7.23	Peak	100	117	3	9375.00	40.65	54.00	-13.35	33.19	7.46	Average	100	159	4	9375.00	53.74	74.00	-20.26	46.28	7.46	Peak	100	159	5	13090.00	42.87	68.20	-25.33	36.81	6.06	Average	100	260	6	13090.00	54.45	88.20	-33.75	48.39	6.06	Peak	100	260
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.52	54.00	-29.48	31.75	-7.23	Average	100	117																																																																
2	1600.00	36.29	74.00	-37.71	43.52	-7.23	Peak	100	117																																																																
3	9375.00	40.65	54.00	-13.35	33.19	7.46	Average	100	159																																																																
4	9375.00	53.74	74.00	-20.26	46.28	7.46	Peak	100	159																																																																
5	13090.00	42.87	68.20	-25.33	36.81	6.06	Average	100	260																																																																
6	13090.00	54.45	88.20	-33.75	48.39	6.06	Peak	100	260																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT80		Test Freq. (MHz)		6545																																																																										
Polarization	Vertical																																																																														
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																															
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>26.29</td><td>54.00</td><td>-27.71</td><td>33.52</td><td>-7.23</td><td>Average</td><td>100</td><td>242</td></tr><tr><td>2</td><td>1600.00</td><td>38.36</td><td>74.00</td><td>-35.64</td><td>45.59</td><td>-7.23</td><td>Peak</td><td>100</td><td>242</td></tr><tr><td>3</td><td>9375.00</td><td>40.23</td><td>54.00</td><td>-13.77</td><td>32.77</td><td>7.46</td><td>Average</td><td>100</td><td>207</td></tr><tr><td>4</td><td>9375.00</td><td>53.05</td><td>74.00</td><td>-20.95</td><td>45.59</td><td>7.46</td><td>Peak</td><td>100</td><td>207</td></tr><tr><td>5</td><td>13090.00</td><td>42.72</td><td>68.20</td><td>-25.48</td><td>36.66</td><td>6.06</td><td>Average</td><td>100</td><td>301</td></tr><tr><td>6</td><td>13090.00</td><td>54.45</td><td>88.20</td><td>-33.75</td><td>48.39</td><td>6.06</td><td>Peak</td><td>100</td><td>301</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.29	54.00	-27.71	33.52	-7.23	Average	100	242	2	1600.00	38.36	74.00	-35.64	45.59	-7.23	Peak	100	242	3	9375.00	40.23	54.00	-13.77	32.77	7.46	Average	100	207	4	9375.00	53.05	74.00	-20.95	45.59	7.46	Peak	100	207	5	13090.00	42.72	68.20	-25.48	36.66	6.06	Average	100	301	6	13090.00	54.45	88.20	-33.75	48.39	6.06	Peak	100	301
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1600.00	26.29	54.00	-27.71	33.52	-7.23	Average	100	242																																																																						
2	1600.00	38.36	74.00	-35.64	45.59	-7.23	Peak	100	242																																																																						
3	9375.00	40.23	54.00	-13.77	32.77	7.46	Average	100	207																																																																						
4	9375.00	53.05	74.00	-20.95	45.59	7.46	Peak	100	207																																																																						
5	13090.00	42.72	68.20	-25.48	36.66	6.06	Average	100	301																																																																						
6	13090.00	54.45	88.20	-33.75	48.39	6.06	Peak	100	301																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															



Modulation	be EHT80	Test Freq. (MHz)	6625																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																									
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>24.50</td><td>54.00</td><td>-29.50</td><td>31.73</td><td>-7.23</td><td>Average</td><td>100</td><td>129</td></tr><tr><td>2</td><td>1600.00</td><td>36.34</td><td>74.00</td><td>-37.66</td><td>43.57</td><td>-7.23</td><td>Peak</td><td>100</td><td>129</td></tr><tr><td>3</td><td>9375.00</td><td>40.45</td><td>54.00</td><td>-13.55</td><td>32.99</td><td>7.46</td><td>Average</td><td>100</td><td>169</td></tr><tr><td>4</td><td>9375.00</td><td>53.75</td><td>74.00</td><td>-20.25</td><td>46.29</td><td>7.46</td><td>Peak</td><td>100</td><td>169</td></tr><tr><td>5</td><td>13250.00</td><td>42.92</td><td>54.00</td><td>-11.08</td><td>36.88</td><td>6.04</td><td>Average</td><td>100</td><td>93</td></tr><tr><td>6</td><td>13250.00</td><td>55.31</td><td>74.00</td><td>-18.69</td><td>49.27</td><td>6.04</td><td>Peak</td><td>100</td><td>93</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.50	54.00	-29.50	31.73	-7.23	Average	100	129	2	1600.00	36.34	74.00	-37.66	43.57	-7.23	Peak	100	129	3	9375.00	40.45	54.00	-13.55	32.99	7.46	Average	100	169	4	9375.00	53.75	74.00	-20.25	46.29	7.46	Peak	100	169	5	13250.00	42.92	54.00	-11.08	36.88	6.04	Average	100	93	6	13250.00	55.31	74.00	-18.69	49.27	6.04	Peak	100	93
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.50	54.00	-29.50	31.73	-7.23	Average	100	129																																																																
2	1600.00	36.34	74.00	-37.66	43.57	-7.23	Peak	100	129																																																																
3	9375.00	40.45	54.00	-13.55	32.99	7.46	Average	100	169																																																																
4	9375.00	53.75	74.00	-20.25	46.29	7.46	Peak	100	169																																																																
5	13250.00	42.92	54.00	-11.08	36.88	6.04	Average	100	93																																																																
6	13250.00	55.31	74.00	-18.69	49.27	6.04	Peak	100	93																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

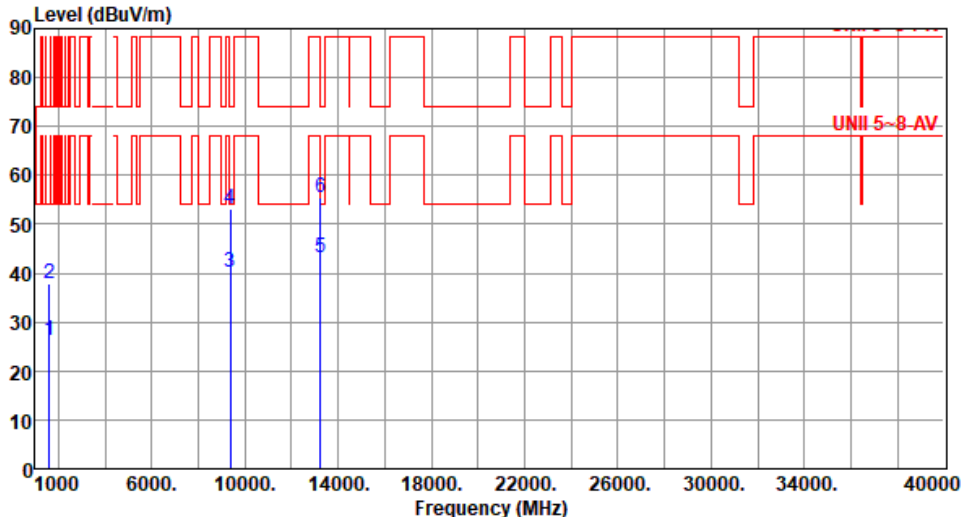


Modulation	be EHT80	Test Freq. (MHz)	6625						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	26.21	54.00	-27.79	33.44	-7.23	Average	100	254
2	1600.00	37.81	74.00	-36.19	45.04	-7.23	Peak	100	254
3	9375.00	40.29	54.00	-13.71	32.83	7.46	Average	100	203
4	9375.00	53.17	74.00	-20.83	45.71	7.46	Peak	100	203
5	13250.00	43.15	54.00	-10.85	37.11	6.04	Average	100	121
6	13250.00	55.56	74.00	-18.44	49.52	6.04	Peak	100	121

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Modulation	be EHT80	Test Freq. (MHz)	6705																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>24.40</td><td>54.00</td><td>-29.60</td><td>31.63</td><td>-7.23</td><td>Average</td><td>100</td><td>122</td></tr><tr><td>2</td><td>1600.00</td><td>36.36</td><td>74.00</td><td>-37.64</td><td>43.59</td><td>-7.23</td><td>Peak</td><td>100</td><td>122</td></tr><tr><td>3</td><td>9375.00</td><td>40.56</td><td>54.00</td><td>-13.44</td><td>33.10</td><td>7.46</td><td>Average</td><td>100</td><td>161</td></tr><tr><td>4</td><td>9375.00</td><td>53.75</td><td>74.00</td><td>-20.25</td><td>46.29</td><td>7.46</td><td>Peak</td><td>100</td><td>161</td></tr><tr><td>5</td><td>13410.00</td><td>43.39</td><td>68.20</td><td>-24.81</td><td>37.22</td><td>6.17</td><td>Average</td><td>100</td><td>129</td></tr><tr><td>6</td><td>13410.00</td><td>55.61</td><td>88.20</td><td>-32.59</td><td>49.44</td><td>6.17</td><td>Peak</td><td>100</td><td>129</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.40	54.00	-29.60	31.63	-7.23	Average	100	122	2	1600.00	36.36	74.00	-37.64	43.59	-7.23	Peak	100	122	3	9375.00	40.56	54.00	-13.44	33.10	7.46	Average	100	161	4	9375.00	53.75	74.00	-20.25	46.29	7.46	Peak	100	161	5	13410.00	43.39	68.20	-24.81	37.22	6.17	Average	100	129	6	13410.00	55.61	88.20	-32.59	49.44	6.17	Peak	100	129
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.40	54.00	-29.60	31.63	-7.23	Average	100	122																																																																
2	1600.00	36.36	74.00	-37.64	43.59	-7.23	Peak	100	122																																																																
3	9375.00	40.56	54.00	-13.44	33.10	7.46	Average	100	161																																																																
4	9375.00	53.75	74.00	-20.25	46.29	7.46	Peak	100	161																																																																
5	13410.00	43.39	68.20	-24.81	37.22	6.17	Average	100	129																																																																
6	13410.00	55.61	88.20	-32.59	49.44	6.17	Peak	100	129																																																																

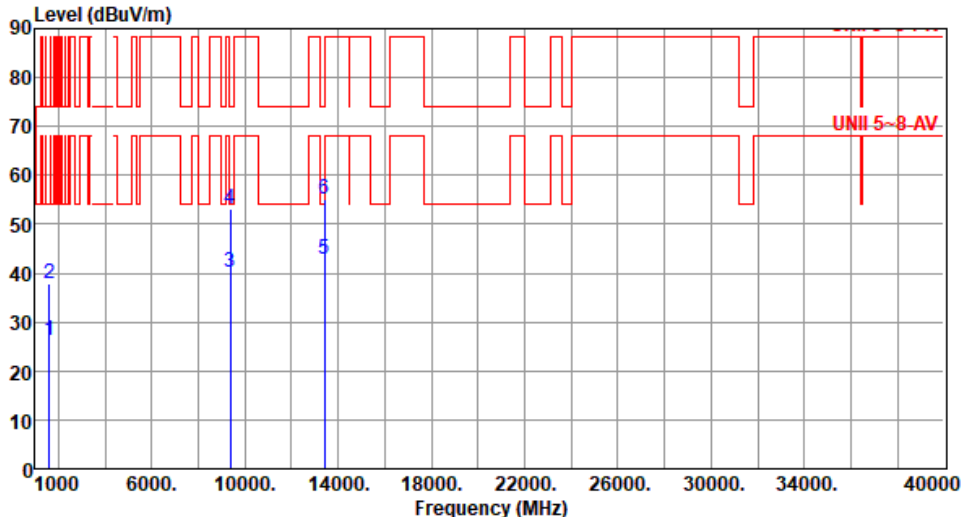

Modulation	be EHT80		Test Freq. (MHz)		6705																																																																																														
Polarization	Vertical																																																																																																		
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1600.00</td><td>26.35</td><td>54.00</td><td>-27.65</td><td>33.58</td><td>-7.23</td><td>Average</td><td>100</td><td>258</td></tr><tr><td>2</td><td>1600.00</td><td>38.00</td><td>74.00</td><td>-36.00</td><td>45.23</td><td>-7.23</td><td>Peak</td><td>100</td><td>258</td></tr><tr><td>3</td><td>9375.00</td><td>40.25</td><td>54.00</td><td>-13.75</td><td>32.79</td><td>7.46</td><td>Average</td><td>100</td><td>214</td></tr><tr><td>4</td><td>9375.00</td><td>53.19</td><td>74.00</td><td>-20.81</td><td>45.73</td><td>7.46</td><td>Peak</td><td>100</td><td>214</td></tr><tr><td>5</td><td>13410.00</td><td>43.00</td><td>68.20</td><td>-25.20</td><td>36.83</td><td>6.17</td><td>Average</td><td>100</td><td>77</td></tr><tr><td>6</td><td>13410.00</td><td>55.20</td><td>88.20</td><td>-33.00</td><td>49.03</td><td>6.17</td><td>Peak</td><td>100</td><td>77</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	1600.00	26.35	54.00	-27.65	33.58	-7.23	Average	100	258	2	1600.00	38.00	74.00	-36.00	45.23	-7.23	Peak	100	258	3	9375.00	40.25	54.00	-13.75	32.79	7.46	Average	100	214	4	9375.00	53.19	74.00	-20.81	45.73	7.46	Peak	100	214	5	13410.00	43.00	68.20	-25.20	36.83	6.17	Average	100	77	6	13410.00	55.20	88.20	-33.00	49.03	6.17	Peak	100	77
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
								cm	deg																																																																																										
1	1600.00	26.35	54.00	-27.65	33.58	-7.23	Average	100	258																																																																																										
2	1600.00	38.00	74.00	-36.00	45.23	-7.23	Peak	100	258																																																																																										
3	9375.00	40.25	54.00	-13.75	32.79	7.46	Average	100	214																																																																																										
4	9375.00	53.19	74.00	-20.81	45.73	7.46	Peak	100	214																																																																																										
5	13410.00	43.00	68.20	-25.20	36.83	6.17	Average	100	77																																																																																										
6	13410.00	55.20	88.20	-33.00	49.03	6.17	Peak	100	77																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			



Modulation	be EHT80	Test Freq. (MHz)	6785						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63									
Level (dBUV/m) UNII 5~8-AV Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	24.45	54.00	-29.55	31.68	-7.23	Average	100	125
2	1600.00	36.34	74.00	-37.66	43.57	-7.23	Peak	100	125
3	9375.00	40.52	54.00	-13.48	33.06	7.46	Average	100	166
4	9375.00	53.75	74.00	-20.25	46.29	7.46	Peak	100	166
5	13570.00	43.76	68.20	-24.44	37.33	6.43	Average	100	291
6	13570.00	56.22	88.20	-31.98	49.79	6.43	Peak	100	291
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									




Modulation	be EHT80	Test Freq. (MHz)	6785						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63									
Level (dBUV/m) UNII 5~8-AV Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	26.17	54.00	-27.83	33.40	-7.23	Average	100	246
2	1600.00	37.78	74.00	-36.22	45.01	-7.23	Peak	100	246
3	9375.00	40.31	54.00	-13.69	32.85	7.46	Average	100	205
4	9375.00	53.19	74.00	-20.81	45.73	7.46	Peak	100	205
5	13570.00	43.66	68.20	-24.54	37.23	6.43	Average	100	193
6	13570.00	55.90	88.20	-32.30	49.47	6.43	Peak	100	193
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									




Modulation	be EHT80		Test Freq. (MHz)		6865																																																																										
Polarization	Horizontal																																																																														
Test By :Allen Lee			Temperature(°C):23			Humidity(%):63																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>24.47</td><td>54.00</td><td>-29.53</td><td>31.70</td><td>-7.23</td><td>Average</td><td>100</td><td>132</td></tr><tr><td>2</td><td>1600.00</td><td>36.34</td><td>74.00</td><td>-37.66</td><td>43.57</td><td>-7.23</td><td>Peak</td><td>100</td><td>132</td></tr><tr><td>3</td><td>9375.00</td><td>40.68</td><td>54.00</td><td>-13.32</td><td>33.22</td><td>7.46</td><td>Average</td><td>100</td><td>159</td></tr><tr><td>4</td><td>9375.00</td><td>53.76</td><td>74.00</td><td>-20.24</td><td>46.30</td><td>7.46</td><td>Peak</td><td>100</td><td>159</td></tr><tr><td>5</td><td>13730.00</td><td>44.01</td><td>68.20</td><td>-24.19</td><td>37.75</td><td>6.26</td><td>Average</td><td>100</td><td>271</td></tr><tr><td>6</td><td>13730.00</td><td>55.94</td><td>88.20</td><td>-32.26</td><td>49.68</td><td>6.26</td><td>Peak</td><td>100</td><td>271</td></tr></tbody></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.47	54.00	-29.53	31.70	-7.23	Average	100	132	2	1600.00	36.34	74.00	-37.66	43.57	-7.23	Peak	100	132	3	9375.00	40.68	54.00	-13.32	33.22	7.46	Average	100	159	4	9375.00	53.76	74.00	-20.24	46.30	7.46	Peak	100	159	5	13730.00	44.01	68.20	-24.19	37.75	6.26	Average	100	271	6	13730.00	55.94	88.20	-32.26	49.68	6.26	Peak	100	271
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1600.00	24.47	54.00	-29.53	31.70	-7.23	Average	100	132																																																																						
2	1600.00	36.34	74.00	-37.66	43.57	-7.23	Peak	100	132																																																																						
3	9375.00	40.68	54.00	-13.32	33.22	7.46	Average	100	159																																																																						
4	9375.00	53.76	74.00	-20.24	46.30	7.46	Peak	100	159																																																																						
5	13730.00	44.01	68.20	-24.19	37.75	6.26	Average	100	271																																																																						
6	13730.00	55.94	88.20	-32.26	49.68	6.26	Peak	100	271																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															

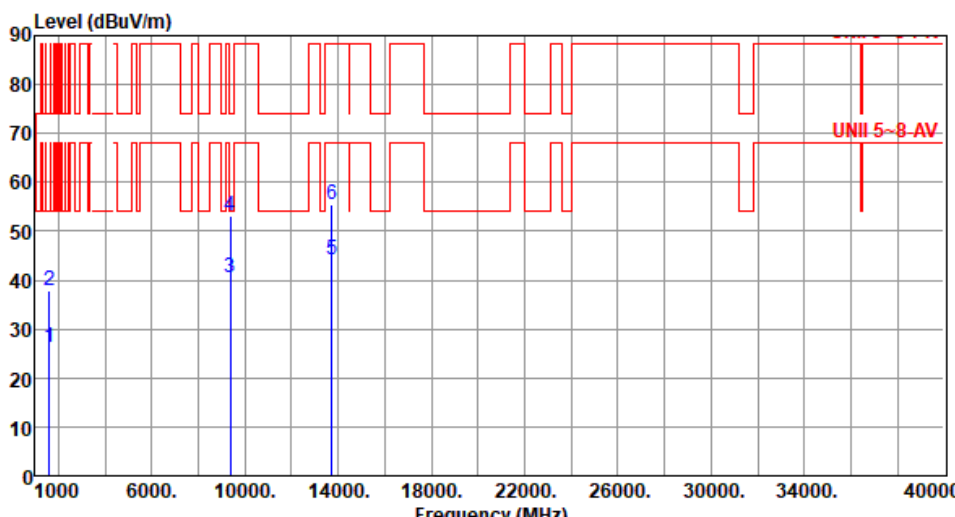


Modulation	be EHT80		Test Freq. (MHz)		6865																																																																										
Polarization	Vertical																																																																														
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																															
 <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>26.37</td><td>54.00</td><td>-27.63</td><td>33.60</td><td>-7.23</td><td>Average</td><td>100</td><td>263</td></tr><tr><td>2</td><td>1600.00</td><td>37.98</td><td>74.00</td><td>-36.02</td><td>45.21</td><td>-7.23</td><td>Peak</td><td>100</td><td>263</td></tr><tr><td>3</td><td>9375.00</td><td>40.37</td><td>54.00</td><td>-13.63</td><td>32.91</td><td>7.46</td><td>Average</td><td>100</td><td>202</td></tr><tr><td>4</td><td>9375.00</td><td>53.21</td><td>74.00</td><td>-20.79</td><td>45.75</td><td>7.46</td><td>Peak</td><td>100</td><td>202</td></tr><tr><td>5</td><td>13730.00</td><td>44.19</td><td>68.20</td><td>-24.01</td><td>37.93</td><td>6.26</td><td>Average</td><td>100</td><td>352</td></tr><tr><td>6</td><td>13730.00</td><td>55.62</td><td>88.20</td><td>-32.58</td><td>49.36</td><td>6.26</td><td>Peak</td><td>100</td><td>352</td></tr></tbody></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.37	54.00	-27.63	33.60	-7.23	Average	100	263	2	1600.00	37.98	74.00	-36.02	45.21	-7.23	Peak	100	263	3	9375.00	40.37	54.00	-13.63	32.91	7.46	Average	100	202	4	9375.00	53.21	74.00	-20.79	45.75	7.46	Peak	100	202	5	13730.00	44.19	68.20	-24.01	37.93	6.26	Average	100	352	6	13730.00	55.62	88.20	-32.58	49.36	6.26	Peak	100	352
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1600.00	26.37	54.00	-27.63	33.60	-7.23	Average	100	263																																																																						
2	1600.00	37.98	74.00	-36.02	45.21	-7.23	Peak	100	263																																																																						
3	9375.00	40.37	54.00	-13.63	32.91	7.46	Average	100	202																																																																						
4	9375.00	53.21	74.00	-20.79	45.75	7.46	Peak	100	202																																																																						
5	13730.00	44.19	68.20	-24.01	37.93	6.26	Average	100	352																																																																						
6	13730.00	55.62	88.20	-32.58	49.36	6.26	Peak	100	352																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															

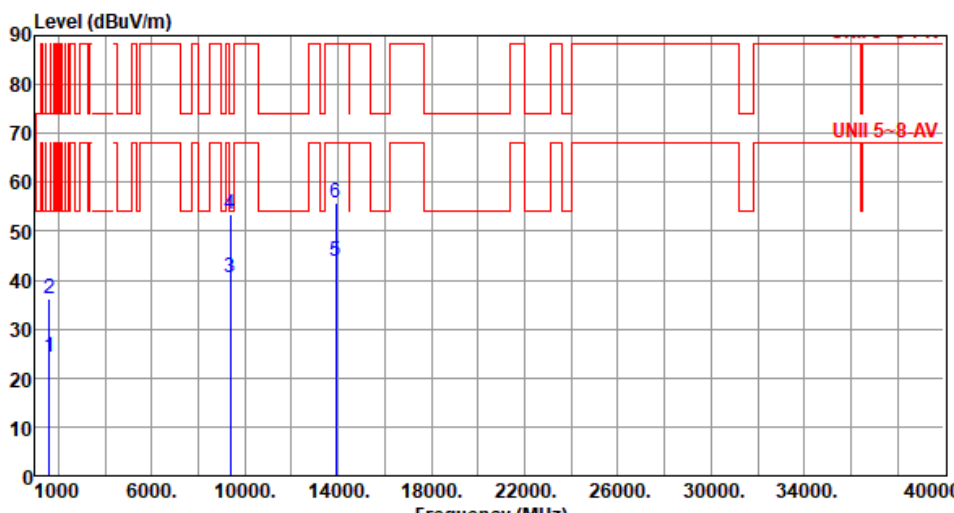


Modulation	be EHT80	Test Freq. (MHz)	6945						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	24.36	54.00	-29.64	31.59	-7.23	Average	100	125
2	1600.00	36.33	74.00	-37.67	43.56	-7.23	Peak	100	125
3	9375.00	40.55	54.00	-13.45	33.09	7.46	Average	100	159
4	9375.00	53.59	74.00	-20.41	46.13	7.46	Peak	100	159
5	13890.00	43.69	68.20	-24.51	37.28	6.41	Average	100	338
6	13890.00	55.69	88.20	-32.51	49.28	6.41	Peak	100	338

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

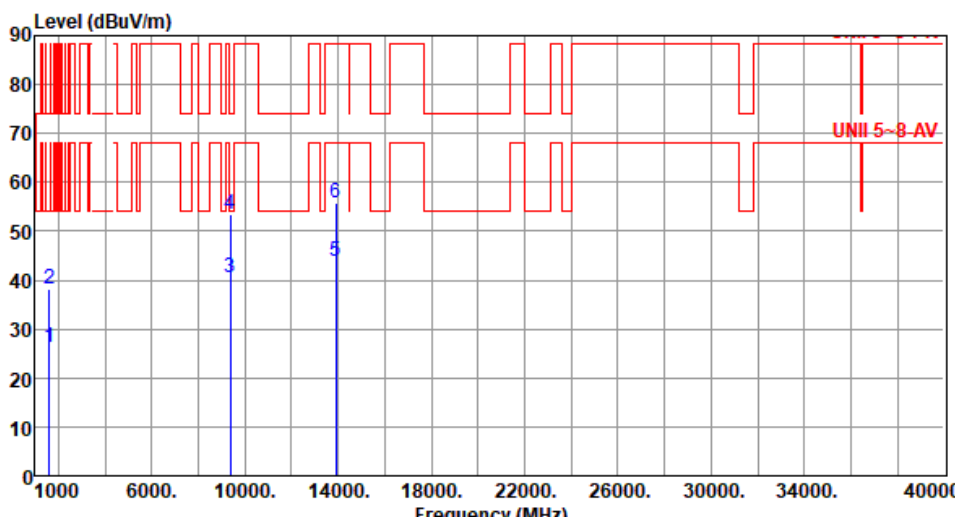

Modulation	be EHT80	Test Freq. (MHz)	6945																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):63																																																																									
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>26.40</td><td>54.00</td><td>-27.60</td><td>33.63</td><td>-7.23</td><td>Average</td><td>100</td><td>253</td></tr><tr><td>2</td><td>1600.00</td><td>38.06</td><td>74.00</td><td>-35.94</td><td>45.29</td><td>-7.23</td><td>Peak</td><td>100</td><td>253</td></tr><tr><td>3</td><td>9375.00</td><td>40.39</td><td>54.00</td><td>-13.61</td><td>32.93</td><td>7.46</td><td>Average</td><td>100</td><td>209</td></tr><tr><td>4</td><td>9375.00</td><td>53.33</td><td>74.00</td><td>-20.67</td><td>45.87</td><td>7.46</td><td>Peak</td><td>100</td><td>209</td></tr><tr><td>5</td><td>13890.00</td><td>43.83</td><td>68.20</td><td>-24.37</td><td>37.42</td><td>6.41</td><td>Average</td><td>100</td><td>242</td></tr><tr><td>6</td><td>13890.00</td><td>55.79</td><td>88.20</td><td>-32.41</td><td>49.38</td><td>6.41</td><td>Peak</td><td>100</td><td>242</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.40	54.00	-27.60	33.63	-7.23	Average	100	253	2	1600.00	38.06	74.00	-35.94	45.29	-7.23	Peak	100	253	3	9375.00	40.39	54.00	-13.61	32.93	7.46	Average	100	209	4	9375.00	53.33	74.00	-20.67	45.87	7.46	Peak	100	209	5	13890.00	43.83	68.20	-24.37	37.42	6.41	Average	100	242	6	13890.00	55.79	88.20	-32.41	49.38	6.41	Peak	100	242
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	26.40	54.00	-27.60	33.63	-7.23	Average	100	253																																																																
2	1600.00	38.06	74.00	-35.94	45.29	-7.23	Peak	100	253																																																																
3	9375.00	40.39	54.00	-13.61	32.93	7.46	Average	100	209																																																																
4	9375.00	53.33	74.00	-20.67	45.87	7.46	Peak	100	209																																																																
5	13890.00	43.83	68.20	-24.37	37.42	6.41	Average	100	242																																																																
6	13890.00	55.79	88.20	-32.41	49.38	6.41	Peak	100	242																																																																

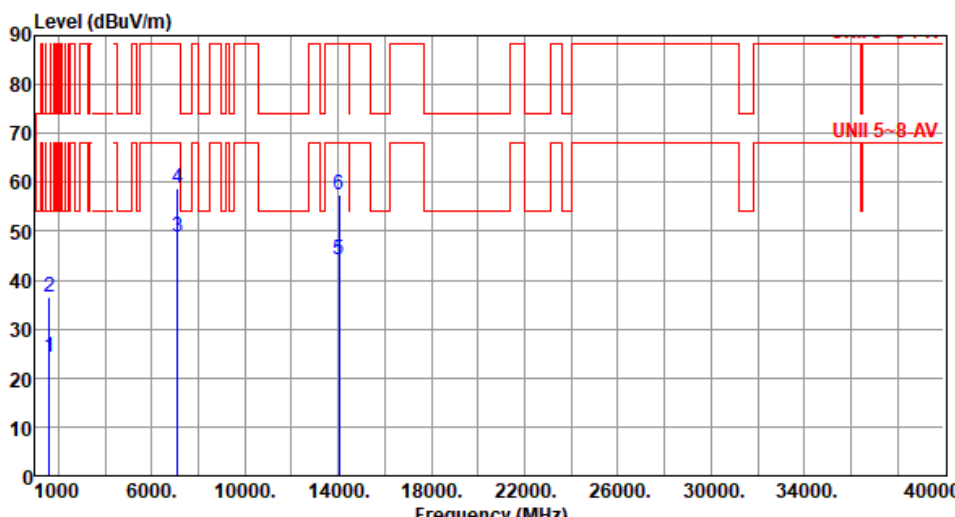


Modulation	be EHT80	Test Freq. (MHz)	7025																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>24.29</td><td>54.00</td><td>-29.71</td><td>31.52</td><td>-7.23</td><td>Average</td><td>100</td><td>130</td></tr><tr><td>2</td><td>1600.00</td><td>36.43</td><td>74.00</td><td>-37.57</td><td>43.66</td><td>-7.23</td><td>Peak</td><td>100</td><td>130</td></tr><tr><td>3</td><td>7125.00</td><td>48.68</td><td>68.20</td><td>-19.52</td><td>43.50</td><td>5.18</td><td>Average</td><td>177</td><td>91</td></tr><tr><td>4</td><td>7125.00</td><td>58.94</td><td>88.20</td><td>-29.26</td><td>53.76</td><td>5.18</td><td>Peak</td><td>177</td><td>91</td></tr><tr><td>5</td><td>14050.00</td><td>44.14</td><td>68.20</td><td>-24.06</td><td>37.28</td><td>6.86</td><td>Average</td><td>100</td><td>154</td></tr><tr><td>6</td><td>14050.00</td><td>57.49</td><td>88.20</td><td>-30.71</td><td>50.63</td><td>6.86</td><td>Peak</td><td>100</td><td>154</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.29	54.00	-29.71	31.52	-7.23	Average	100	130	2	1600.00	36.43	74.00	-37.57	43.66	-7.23	Peak	100	130	3	7125.00	48.68	68.20	-19.52	43.50	5.18	Average	177	91	4	7125.00	58.94	88.20	-29.26	53.76	5.18	Peak	177	91	5	14050.00	44.14	68.20	-24.06	37.28	6.86	Average	100	154	6	14050.00	57.49	88.20	-30.71	50.63	6.86	Peak	100	154
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.29	54.00	-29.71	31.52	-7.23	Average	100	130																																																																
2	1600.00	36.43	74.00	-37.57	43.66	-7.23	Peak	100	130																																																																
3	7125.00	48.68	68.20	-19.52	43.50	5.18	Average	177	91																																																																
4	7125.00	58.94	88.20	-29.26	53.76	5.18	Peak	177	91																																																																
5	14050.00	44.14	68.20	-24.06	37.28	6.86	Average	100	154																																																																
6	14050.00	57.49	88.20	-30.71	50.63	6.86	Peak	100	154																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT80	Test Freq. (MHz)	7025																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>26.50</td><td>54.00</td><td>-27.50</td><td>33.73</td><td>-7.23</td><td>Average</td><td>100</td><td>244</td></tr><tr><td>2</td><td>1600.00</td><td>37.88</td><td>74.00</td><td>-36.12</td><td>45.11</td><td>-7.23</td><td>Peak</td><td>100</td><td>244</td></tr><tr><td>3</td><td>7125.00</td><td>48.33</td><td>68.20</td><td>-19.87</td><td>43.15</td><td>5.18</td><td>Average</td><td>232</td><td>260</td></tr><tr><td>4</td><td>7125.00</td><td>59.63</td><td>88.20</td><td>-28.57</td><td>54.45</td><td>5.18</td><td>Peak</td><td>232</td><td>260</td></tr><tr><td>5</td><td>14050.00</td><td>44.09</td><td>68.20</td><td>-24.11</td><td>37.23</td><td>6.86</td><td>Average</td><td>100</td><td>345</td></tr><tr><td>6</td><td>14050.00</td><td>56.98</td><td>88.20</td><td>-31.22</td><td>50.12</td><td>6.86</td><td>Peak</td><td>100</td><td>345</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.50	54.00	-27.50	33.73	-7.23	Average	100	244	2	1600.00	37.88	74.00	-36.12	45.11	-7.23	Peak	100	244	3	7125.00	48.33	68.20	-19.87	43.15	5.18	Average	232	260	4	7125.00	59.63	88.20	-28.57	54.45	5.18	Peak	232	260	5	14050.00	44.09	68.20	-24.11	37.23	6.86	Average	100	345	6	14050.00	56.98	88.20	-31.22	50.12	6.86	Peak	100	345
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	26.50	54.00	-27.50	33.73	-7.23	Average	100	244																																																																
2	1600.00	37.88	74.00	-36.12	45.11	-7.23	Peak	100	244																																																																
3	7125.00	48.33	68.20	-19.87	43.15	5.18	Average	232	260																																																																
4	7125.00	59.63	88.20	-28.57	54.45	5.18	Peak	232	260																																																																
5	14050.00	44.09	68.20	-24.11	37.23	6.86	Average	100	345																																																																
6	14050.00	56.98	88.20	-31.22	50.12	6.86	Peak	100	345																																																																

Unwanted Emissions (Above 1GHz) for be EHT160

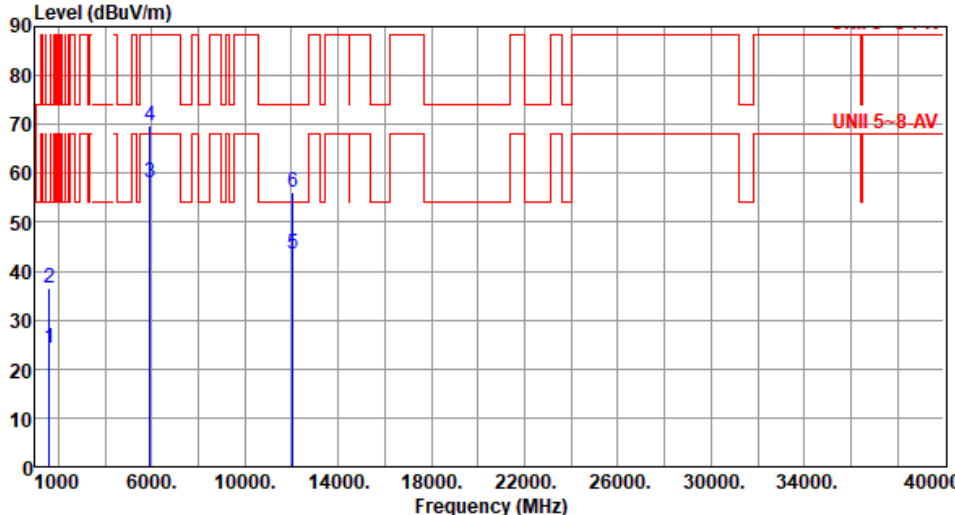Modulation	be EHT160	Test Freq. (MHz)	6025																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>24.35</td><td>54.00</td><td>-29.65</td><td>31.58</td><td>-7.23</td><td>Average</td><td>100</td><td>123</td></tr><tr><td>2</td><td>1600.00</td><td>36.43</td><td>74.00</td><td>-37.57</td><td>43.66</td><td>-7.23</td><td>Peak</td><td>100</td><td>123</td></tr><tr><td>3</td><td>5925.00</td><td>57.98</td><td>68.20</td><td>-10.22</td><td>56.81</td><td>1.17</td><td>Average</td><td>236</td><td>86</td></tr><tr><td>4</td><td>5925.00</td><td>69.61</td><td>88.20</td><td>-18.59</td><td>68.44</td><td>1.17</td><td>Peak</td><td>236</td><td>86</td></tr><tr><td>5</td><td>12050.00</td><td>43.43</td><td>54.00</td><td>-10.57</td><td>36.54</td><td>6.89</td><td>Average</td><td>228</td><td>247</td></tr><tr><td>6</td><td>12050.00</td><td>56.20</td><td>74.00</td><td>-17.80</td><td>49.31</td><td>6.89</td><td>Peak</td><td>228</td><td>247</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.35	54.00	-29.65	31.58	-7.23	Average	100	123	2	1600.00	36.43	74.00	-37.57	43.66	-7.23	Peak	100	123	3	5925.00	57.98	68.20	-10.22	56.81	1.17	Average	236	86	4	5925.00	69.61	88.20	-18.59	68.44	1.17	Peak	236	86	5	12050.00	43.43	54.00	-10.57	36.54	6.89	Average	228	247	6	12050.00	56.20	74.00	-17.80	49.31	6.89	Peak	228	247
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.35	54.00	-29.65	31.58	-7.23	Average	100	123																																																																
2	1600.00	36.43	74.00	-37.57	43.66	-7.23	Peak	100	123																																																																
3	5925.00	57.98	68.20	-10.22	56.81	1.17	Average	236	86																																																																
4	5925.00	69.61	88.20	-18.59	68.44	1.17	Peak	236	86																																																																
5	12050.00	43.43	54.00	-10.57	36.54	6.89	Average	228	247																																																																
6	12050.00	56.20	74.00	-17.80	49.31	6.89	Peak	228	247																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

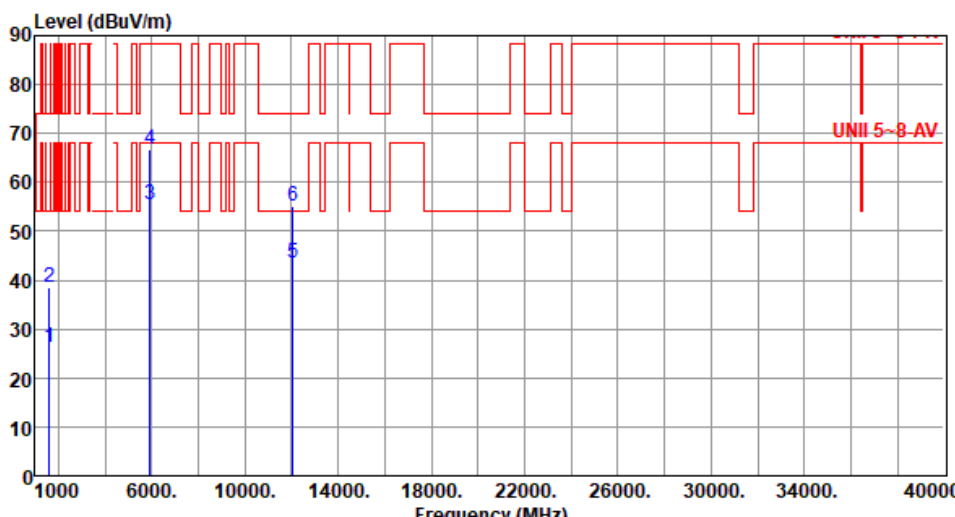


Modulation	be EHT160	Test Freq. (MHz)	6025																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>26.35</td><td>54.00</td><td>-27.65</td><td>33.58</td><td>-7.23</td><td>Average</td><td>100</td><td>244</td></tr><tr><td>2</td><td>1600.00</td><td>38.46</td><td>74.00</td><td>-35.54</td><td>45.69</td><td>-7.23</td><td>Peak</td><td>100</td><td>244</td></tr><tr><td>3</td><td>5925.00</td><td>55.40</td><td>68.20</td><td>-12.80</td><td>54.23</td><td>1.17</td><td>Average</td><td>237</td><td>255</td></tr><tr><td>4</td><td>5925.00</td><td>66.77</td><td>88.20</td><td>-21.43</td><td>65.60</td><td>1.17</td><td>Peak</td><td>237</td><td>255</td></tr><tr><td>5</td><td>12050.00</td><td>43.44</td><td>54.00</td><td>-10.56</td><td>36.55</td><td>6.89</td><td>Average</td><td>100</td><td>142</td></tr><tr><td>6</td><td>12050.00</td><td>55.15</td><td>74.00</td><td>-18.85</td><td>48.26</td><td>6.89</td><td>Peak</td><td>100</td><td>142</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.35	54.00	-27.65	33.58	-7.23	Average	100	244	2	1600.00	38.46	74.00	-35.54	45.69	-7.23	Peak	100	244	3	5925.00	55.40	68.20	-12.80	54.23	1.17	Average	237	255	4	5925.00	66.77	88.20	-21.43	65.60	1.17	Peak	237	255	5	12050.00	43.44	54.00	-10.56	36.55	6.89	Average	100	142	6	12050.00	55.15	74.00	-18.85	48.26	6.89	Peak	100	142
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	26.35	54.00	-27.65	33.58	-7.23	Average	100	244																																																																
2	1600.00	38.46	74.00	-35.54	45.69	-7.23	Peak	100	244																																																																
3	5925.00	55.40	68.20	-12.80	54.23	1.17	Average	237	255																																																																
4	5925.00	66.77	88.20	-21.43	65.60	1.17	Peak	237	255																																																																
5	12050.00	43.44	54.00	-10.56	36.55	6.89	Average	100	142																																																																
6	12050.00	55.15	74.00	-18.85	48.26	6.89	Peak	100	142																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT160	Test Freq. (MHz)	6185						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64									
Level (dBuV/m) UNII 5-8-AV Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	24.51	54.00	-29.49	31.74	-7.23	Average	100	120
2	1600.00	36.38	74.00	-37.62	43.61	-7.23	Peak	100	120
3	5925.00	49.88	68.20	-18.32	48.71	1.17	Average	115	91
4	5925.00	63.29	88.20	-24.91	62.12	1.17	Peak	115	91
5	12370.00	43.02	54.00	-10.98	35.98	7.04	Average	123	5
6	12370.00	54.67	74.00	-19.33	47.63	7.04	Peak	123	5

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

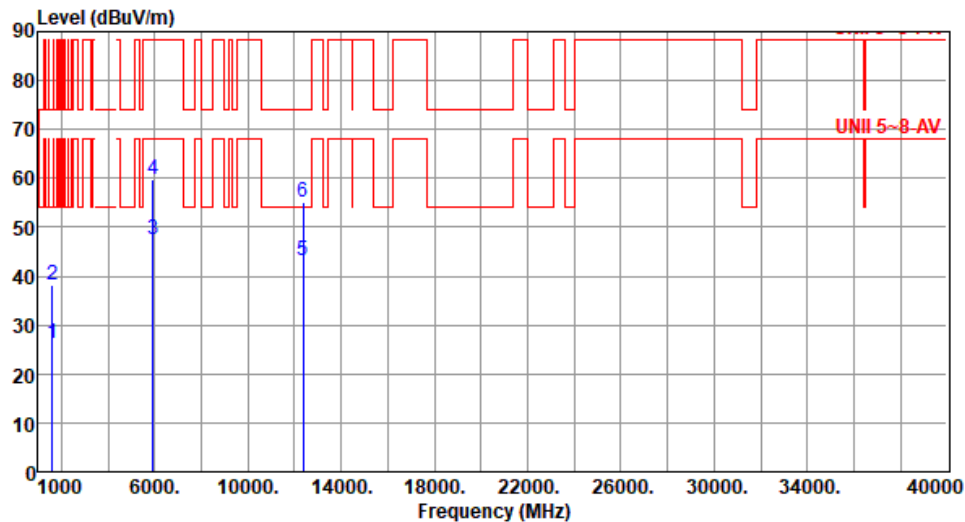

Modulation	be EHT160	Test Freq. (MHz)	6185						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	26.31	54.00	-27.69	33.54	-7.23	Average	100	243
2	1600.00	38.34	74.00	-35.66	45.57	-7.23	Peak	100	243
3	5925.00	47.47	68.20	-20.73	46.30	1.17	Average	175	294
4	5925.00	59.93	88.20	-28.27	58.76	1.17	Peak	175	294
5	12370.00	43.33	54.00	-10.67	36.29	7.04	Average	100	248
6	12370.00	55.14	74.00	-18.86	48.10	7.04	Peak	100	248
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									




Modulation	be EHT160	Test Freq. (MHz)	6345																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64																																																																									
Level (dBUV/m) 90 80 70 60 50 40 30 20 10 0 1000 6000. 10000. 14000. 18000. 22000. 26000. 30000. 34000. 40000 Frequency (MHz) 1 2 3 4 5 6 1600.00 1600.00 9375.00 9375.00 12690.00 12690.00 24.31 36.15 40.54 53.69 42.81 54.76 54.00 74.00 54.00 74.00 54.00 74.00 -29.69 -37.85 -13.46 -20.31 -11.19 -19.24 31.54 43.38 33.08 46.23 35.97 47.92 -7.23 -7.23 7.46 7.46 6.84 6.84 Average Peak Average Peak Average Peak 100 100 100 100 100 100 127 127 155 155 256 256 UNII 5~8-AV <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>24.31</td><td>54.00</td><td>-29.69</td><td>31.54</td><td>-7.23</td><td>Average</td><td>100</td><td>127</td></tr><tr><td>2</td><td>1600.00</td><td>36.15</td><td>74.00</td><td>-37.85</td><td>43.38</td><td>-7.23</td><td>Peak</td><td>100</td><td>127</td></tr><tr><td>3</td><td>9375.00</td><td>40.54</td><td>54.00</td><td>-13.46</td><td>33.08</td><td>7.46</td><td>Average</td><td>100</td><td>155</td></tr><tr><td>4</td><td>9375.00</td><td>53.69</td><td>74.00</td><td>-20.31</td><td>46.23</td><td>7.46</td><td>Peak</td><td>100</td><td>155</td></tr><tr><td>5</td><td>12690.00</td><td>42.81</td><td>54.00</td><td>-11.19</td><td>35.97</td><td>6.84</td><td>Average</td><td>100</td><td>256</td></tr><tr><td>6</td><td>12690.00</td><td>54.76</td><td>74.00</td><td>-19.24</td><td>47.92</td><td>6.84</td><td>Peak</td><td>100</td><td>256</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.31	54.00	-29.69	31.54	-7.23	Average	100	127	2	1600.00	36.15	74.00	-37.85	43.38	-7.23	Peak	100	127	3	9375.00	40.54	54.00	-13.46	33.08	7.46	Average	100	155	4	9375.00	53.69	74.00	-20.31	46.23	7.46	Peak	100	155	5	12690.00	42.81	54.00	-11.19	35.97	6.84	Average	100	256	6	12690.00	54.76	74.00	-19.24	47.92	6.84	Peak	100	256
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	24.31	54.00	-29.69	31.54	-7.23	Average	100	127																																																																
2	1600.00	36.15	74.00	-37.85	43.38	-7.23	Peak	100	127																																																																
3	9375.00	40.54	54.00	-13.46	33.08	7.46	Average	100	155																																																																
4	9375.00	53.69	74.00	-20.31	46.23	7.46	Peak	100	155																																																																
5	12690.00	42.81	54.00	-11.19	35.97	6.84	Average	100	256																																																																
6	12690.00	54.76	74.00	-19.24	47.92	6.84	Peak	100	256																																																																



Modulation	be EHT160	Test Freq. (MHz)	6345						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	26.34	54.00	-27.66	33.57	-7.23	Average	100	248
2	1600.00	38.41	74.00	-35.59	45.64	-7.23	Peak	100	248
3	9375.00	40.67	54.00	-13.33	33.21	7.46	Average	100	208
4	9375.00	54.14	74.00	-19.86	46.68	7.46	Peak	100	208
5	12690.00	42.62	54.00	-11.38	35.78	6.84	Average	100	144
6	12690.00	55.08	74.00	-18.92	48.24	6.84	Peak	100	144

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

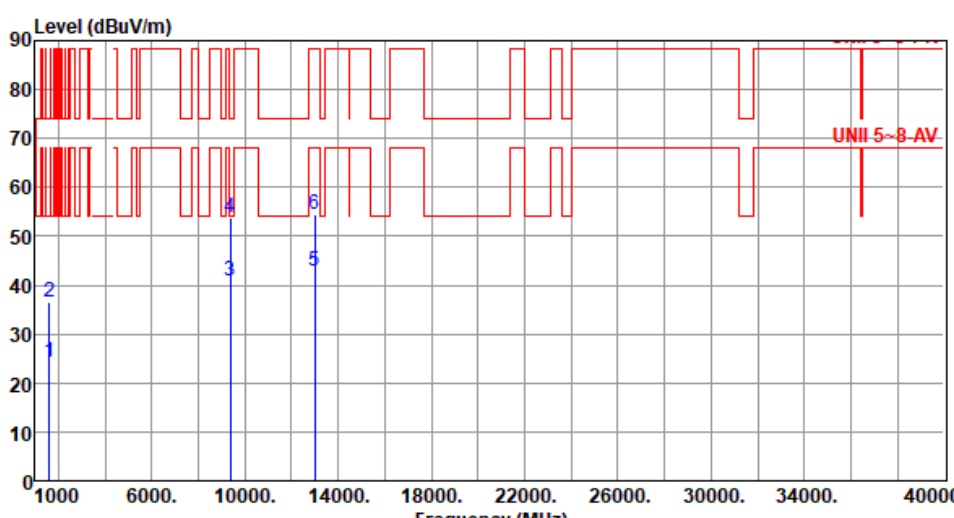


Modulation	be EHT160	Test Freq. (MHz)	6505						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	24.23	54.00	-29.77	31.46	-7.23	Average	100	152
2	1600.00	36.43	74.00	-37.57	43.66	-7.23	Peak	100	152
3	9375.00	40.72	54.00	-13.28	33.26	7.46	Average	100	148
4	9375.00	53.73	74.00	-20.27	46.27	7.46	Peak	100	148
5	13010.00	42.74	68.20	-25.46	36.34	6.40	Average	100	324
6	13010.00	54.53	88.20	-33.67	48.13	6.40	Peak	100	324

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	be EHT160	Test Freq. (MHz)	6505																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1600.00</td><td>26.34</td><td>54.00</td><td>-27.66</td><td>33.57</td><td>-7.23</td><td>Average</td><td>100</td><td>255</td></tr><tr><td>2</td><td>1600.00</td><td>38.52</td><td>74.00</td><td>-35.48</td><td>45.75</td><td>-7.23</td><td>Peak</td><td>100</td><td>255</td></tr><tr><td>3</td><td>9375.00</td><td>40.32</td><td>54.00</td><td>-13.68</td><td>32.86</td><td>7.46</td><td>Average</td><td>100</td><td>210</td></tr><tr><td>4</td><td>9375.00</td><td>53.30</td><td>74.00</td><td>-20.70</td><td>45.84</td><td>7.46</td><td>Peak</td><td>100</td><td>210</td></tr><tr><td>5</td><td>13010.00</td><td>43.13</td><td>68.20</td><td>-25.07</td><td>36.73</td><td>6.40</td><td>Average</td><td>100</td><td>278</td></tr><tr><td>6</td><td>13010.00</td><td>54.69</td><td>88.20</td><td>-33.51</td><td>48.29</td><td>6.40</td><td>Peak</td><td>100</td><td>278</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.34	54.00	-27.66	33.57	-7.23	Average	100	255	2	1600.00	38.52	74.00	-35.48	45.75	-7.23	Peak	100	255	3	9375.00	40.32	54.00	-13.68	32.86	7.46	Average	100	210	4	9375.00	53.30	74.00	-20.70	45.84	7.46	Peak	100	210	5	13010.00	43.13	68.20	-25.07	36.73	6.40	Average	100	278	6	13010.00	54.69	88.20	-33.51	48.29	6.40	Peak	100	278
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1600.00	26.34	54.00	-27.66	33.57	-7.23	Average	100	255																																																																
2	1600.00	38.52	74.00	-35.48	45.75	-7.23	Peak	100	255																																																																
3	9375.00	40.32	54.00	-13.68	32.86	7.46	Average	100	210																																																																
4	9375.00	53.30	74.00	-20.70	45.84	7.46	Peak	100	210																																																																
5	13010.00	43.13	68.20	-25.07	36.73	6.40	Average	100	278																																																																
6	13010.00	54.69	88.20	-33.51	48.29	6.40	Peak	100	278																																																																

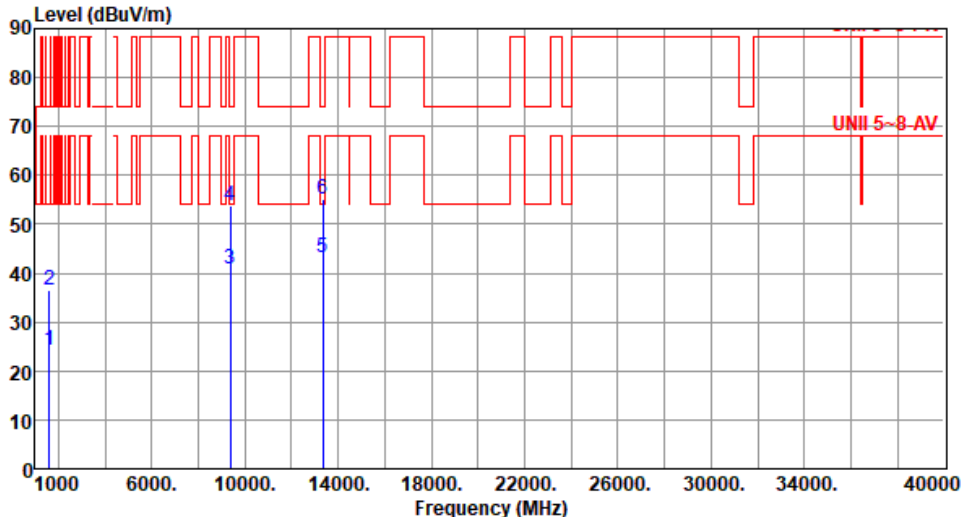


Modulation	be EHT160		Test Freq. (MHz)		6665																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Allen Lee Temperature(°C):22 Humidity(%):64																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1600.00</td><td>24.32</td><td>54.00</td><td>-29.68</td><td>31.55</td><td>-7.23</td><td>Average</td><td>100</td><td>123</td></tr><tr><td>2</td><td>1600.00</td><td>36.43</td><td>74.00</td><td>-37.57</td><td>43.66</td><td>-7.23</td><td>Peak</td><td>100</td><td>123</td></tr><tr><td>3</td><td>9375.00</td><td>40.71</td><td>54.00</td><td>-13.29</td><td>33.25</td><td>7.46</td><td>Average</td><td>100</td><td>162</td></tr><tr><td>4</td><td>9375.00</td><td>53.66</td><td>74.00</td><td>-20.34</td><td>46.20</td><td>7.46</td><td>Peak</td><td>100</td><td>162</td></tr><tr><td>5</td><td>13330.00</td><td>43.08</td><td>54.00</td><td>-10.92</td><td>37.02</td><td>6.06</td><td>Average</td><td>100</td><td>81</td></tr><tr><td>6</td><td>13330.00</td><td>55.25</td><td>74.00</td><td>-18.75</td><td>49.19</td><td>6.06</td><td>Peak</td><td>100</td><td>81</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table						dBuV			cm	deg	1	1600.00	24.32	54.00	-29.68	31.55	-7.23	Average	100	123	2	1600.00	36.43	74.00	-37.57	43.66	-7.23	Peak	100	123	3	9375.00	40.71	54.00	-13.29	33.25	7.46	Average	100	162	4	9375.00	53.66	74.00	-20.34	46.20	7.46	Peak	100	162	5	13330.00	43.08	54.00	-10.92	37.02	6.06	Average	100	81	6	13330.00	55.25	74.00	-18.75	49.19	6.06	Peak	100	81
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
					dBuV			cm	deg																																																																																										
1	1600.00	24.32	54.00	-29.68	31.55	-7.23	Average	100	123																																																																																										
2	1600.00	36.43	74.00	-37.57	43.66	-7.23	Peak	100	123																																																																																										
3	9375.00	40.71	54.00	-13.29	33.25	7.46	Average	100	162																																																																																										
4	9375.00	53.66	74.00	-20.34	46.20	7.46	Peak	100	162																																																																																										
5	13330.00	43.08	54.00	-10.92	37.02	6.06	Average	100	81																																																																																										
6	13330.00	55.25	74.00	-18.75	49.19	6.06	Peak	100	81																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			

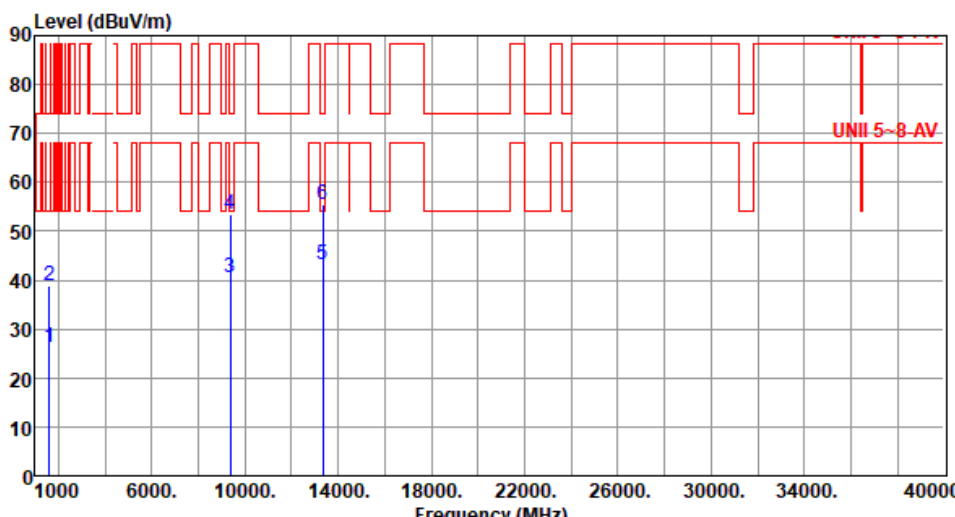


Modulation	be EHT160	Test Freq. (MHz)	6665						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	26.19	54.00	-27.81	33.42	-7.23	Average	100	251
2	1600.00	38.87	74.00	-35.13	46.10	-7.23	Peak	100	251
3	9375.00	40.45	54.00	-13.55	32.99	7.46	Average	100	204
4	9375.00	53.40	74.00	-20.60	45.94	7.46	Peak	100	204
5	13330.00	43.09	54.00	-10.91	37.03	6.06	Average	100	115
6	13330.00	55.44	74.00	-18.56	49.38	6.06	Peak	100	115

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

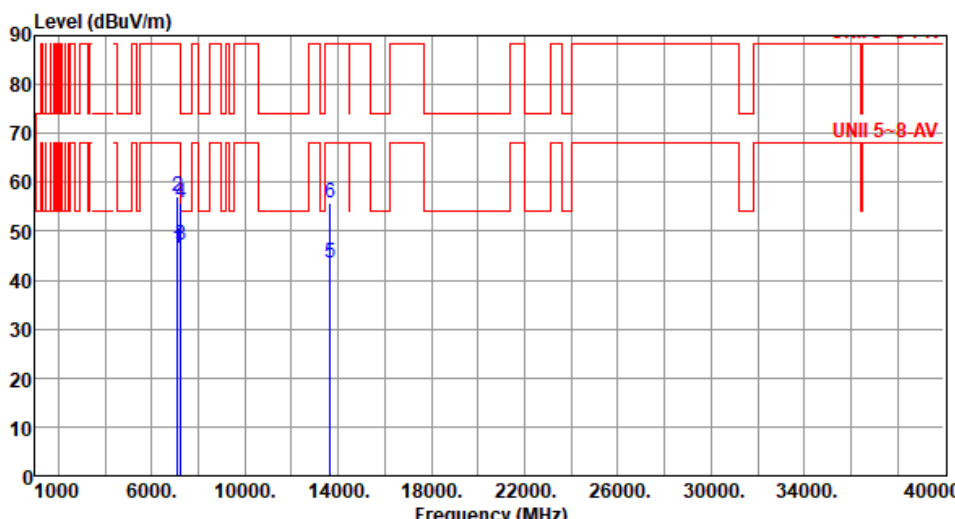

Modulation	be EHT160	Test Freq. (MHz)	6825																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>46.64</td><td>68.20</td><td>-21.56</td><td>41.46</td><td>5.18</td><td>Average</td><td>119</td><td>87</td></tr><tr><td>2</td><td>7125.00</td><td>57.13</td><td>88.20</td><td>-31.07</td><td>51.95</td><td>5.18</td><td>Peak</td><td>119</td><td>87</td></tr><tr><td>3</td><td>7250.00</td><td>46.99</td><td>54.00</td><td>-7.01</td><td>41.38</td><td>5.61</td><td>Average</td><td>119</td><td>87</td></tr><tr><td>4</td><td>7250.00</td><td>55.72</td><td>74.00</td><td>-18.28</td><td>50.11</td><td>5.61</td><td>Peak</td><td>119</td><td>87</td></tr><tr><td>5</td><td>13650.00</td><td>43.66</td><td>68.20</td><td>-24.54</td><td>37.44</td><td>6.22</td><td>Average</td><td>100</td><td>287</td></tr><tr><td>6</td><td>13650.00</td><td>55.90</td><td>88.20</td><td>-32.30</td><td>49.68</td><td>6.22</td><td>Peak</td><td>100</td><td>287</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	46.64	68.20	-21.56	41.46	5.18	Average	119	87	2	7125.00	57.13	88.20	-31.07	51.95	5.18	Peak	119	87	3	7250.00	46.99	54.00	-7.01	41.38	5.61	Average	119	87	4	7250.00	55.72	74.00	-18.28	50.11	5.61	Peak	119	87	5	13650.00	43.66	68.20	-24.54	37.44	6.22	Average	100	287	6	13650.00	55.90	88.20	-32.30	49.68	6.22	Peak	100	287
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	46.64	68.20	-21.56	41.46	5.18	Average	119	87																																																																
2	7125.00	57.13	88.20	-31.07	51.95	5.18	Peak	119	87																																																																
3	7250.00	46.99	54.00	-7.01	41.38	5.61	Average	119	87																																																																
4	7250.00	55.72	74.00	-18.28	50.11	5.61	Peak	119	87																																																																
5	13650.00	43.66	68.20	-24.54	37.44	6.22	Average	100	287																																																																
6	13650.00	55.90	88.20	-32.30	49.68	6.22	Peak	100	287																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

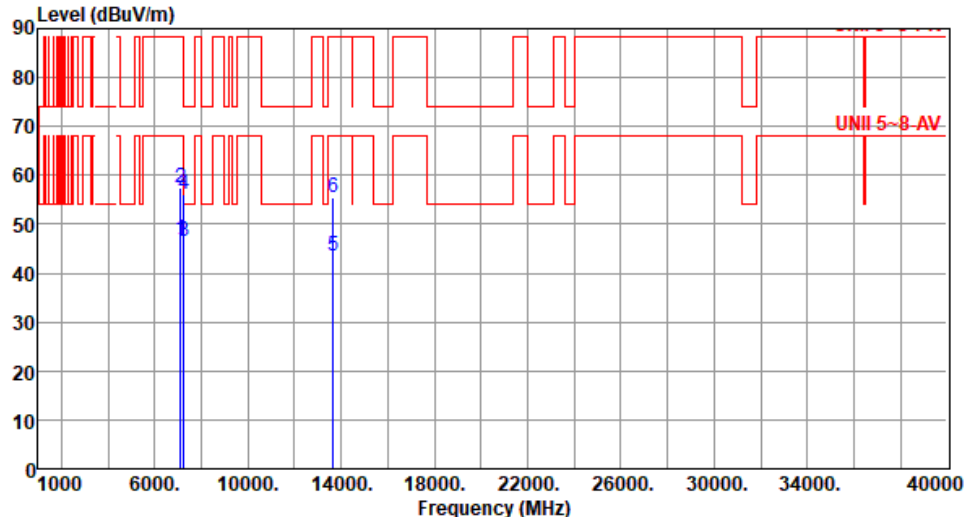


Modulation	be EHT160	Test Freq. (MHz)	6825																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>46.89</td><td>68.20</td><td>-21.31</td><td>41.71</td><td>5.18</td><td>Average</td><td>150</td><td>252</td></tr><tr><td>2</td><td>7125.00</td><td>57.41</td><td>88.20</td><td>-30.79</td><td>52.23</td><td>5.18</td><td>Peak</td><td>150</td><td>252</td></tr><tr><td>3</td><td>7250.00</td><td>46.59</td><td>54.00</td><td>-7.41</td><td>40.98</td><td>5.61</td><td>Average</td><td>150</td><td>252</td></tr><tr><td>4</td><td>7250.00</td><td>56.03</td><td>74.00</td><td>-17.97</td><td>50.42</td><td>5.61</td><td>Peak</td><td>150</td><td>252</td></tr><tr><td>5</td><td>13650.00</td><td>43.40</td><td>68.20</td><td>-24.80</td><td>37.18</td><td>6.22</td><td>Average</td><td>100</td><td>200</td></tr><tr><td>6</td><td>13650.00</td><td>55.47</td><td>88.20</td><td>-32.73</td><td>49.25</td><td>6.22</td><td>Peak</td><td>100</td><td>200</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	46.89	68.20	-21.31	41.71	5.18	Average	150	252	2	7125.00	57.41	88.20	-30.79	52.23	5.18	Peak	150	252	3	7250.00	46.59	54.00	-7.41	40.98	5.61	Average	150	252	4	7250.00	56.03	74.00	-17.97	50.42	5.61	Peak	150	252	5	13650.00	43.40	68.20	-24.80	37.18	6.22	Average	100	200	6	13650.00	55.47	88.20	-32.73	49.25	6.22	Peak	100	200
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	46.89	68.20	-21.31	41.71	5.18	Average	150	252																																																																
2	7125.00	57.41	88.20	-30.79	52.23	5.18	Peak	150	252																																																																
3	7250.00	46.59	54.00	-7.41	40.98	5.61	Average	150	252																																																																
4	7250.00	56.03	74.00	-17.97	50.42	5.61	Peak	150	252																																																																
5	13650.00	43.40	68.20	-24.80	37.18	6.22	Average	100	200																																																																
6	13650.00	55.47	88.20	-32.73	49.25	6.22	Peak	100	200																																																																




Modulation	be EHT160	Test Freq. (MHz)	6985																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>57.34</td><td>68.20</td><td>-10.86</td><td>52.16</td><td>5.18</td><td>Average</td><td>129</td><td>281</td></tr><tr><td>2</td><td>7125.00</td><td>73.44</td><td>88.20</td><td>-14.76</td><td>68.26</td><td>5.18</td><td>Peak</td><td>129</td><td>281</td></tr><tr><td>3</td><td>7250.00</td><td>47.97</td><td>54.00</td><td>-6.03</td><td>42.36</td><td>5.61</td><td>Average</td><td>129</td><td>281</td></tr><tr><td>4</td><td>7250.00</td><td>58.19</td><td>74.00</td><td>-15.81</td><td>52.58</td><td>5.61</td><td>Peak</td><td>129</td><td>281</td></tr><tr><td>5</td><td>13970.00</td><td>44.48</td><td>68.20</td><td>-23.72</td><td>37.80</td><td>6.68</td><td>Average</td><td>100</td><td>282</td></tr><tr><td>6</td><td>13970.00</td><td>56.43</td><td>88.20</td><td>-31.77</td><td>49.75</td><td>6.68</td><td>Peak</td><td>100</td><td>282</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	57.34	68.20	-10.86	52.16	5.18	Average	129	281	2	7125.00	73.44	88.20	-14.76	68.26	5.18	Peak	129	281	3	7250.00	47.97	54.00	-6.03	42.36	5.61	Average	129	281	4	7250.00	58.19	74.00	-15.81	52.58	5.61	Peak	129	281	5	13970.00	44.48	68.20	-23.72	37.80	6.68	Average	100	282	6	13970.00	56.43	88.20	-31.77	49.75	6.68	Peak	100	282
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	57.34	68.20	-10.86	52.16	5.18	Average	129	281																																																																
2	7125.00	73.44	88.20	-14.76	68.26	5.18	Peak	129	281																																																																
3	7250.00	47.97	54.00	-6.03	42.36	5.61	Average	129	281																																																																
4	7250.00	58.19	74.00	-15.81	52.58	5.61	Peak	129	281																																																																
5	13970.00	44.48	68.20	-23.72	37.80	6.68	Average	100	282																																																																
6	13970.00	56.43	88.20	-31.77	49.75	6.68	Peak	100	282																																																																

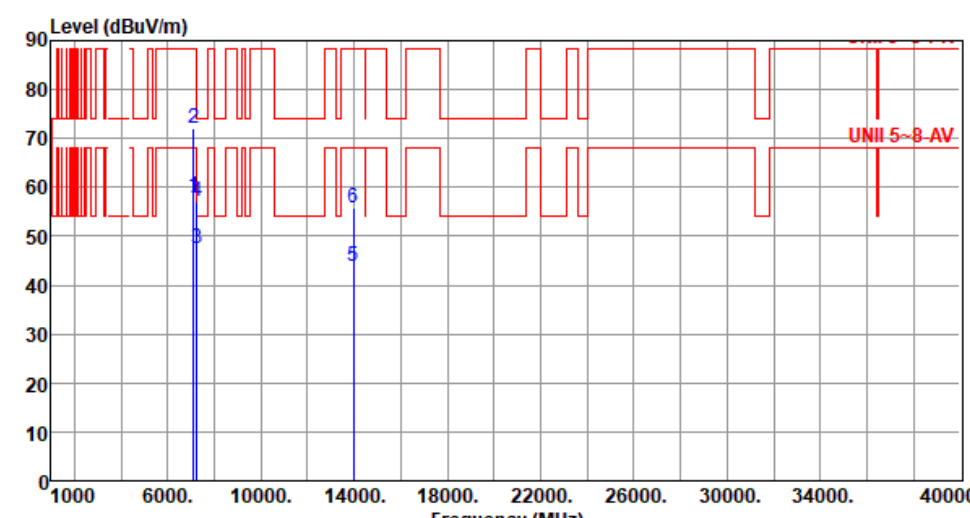

Modulation	be EHT160	Test Freq. (MHz)	6985						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	58.00	68.20	-10.20	52.82	5.18	Average	183	307
2	7125.00	72.18	88.20	-16.02	67.00	5.18	Peak	183	307
3	7250.00	47.60	54.00	-6.40	41.99	5.61	Average	183	307
4	7250.00	57.22	74.00	-16.78	51.61	5.61	Peak	183	307
5	13970.00	43.98	68.20	-24.22	37.30	6.68	Average	100	345
6	13970.00	55.84	88.20	-32.36	49.16	6.68	Peak	100	345
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									




Unwanted Emissions (Above 1GHz) for be EHT320

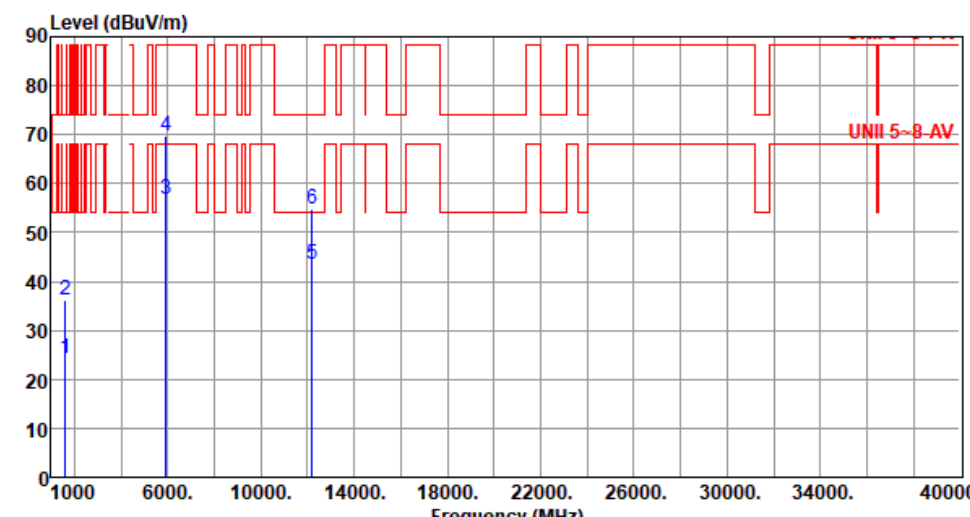Modulation	be EHT320	Test Freq. (MHz)	6105
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):61			
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB reading dBuV dB/m cm deg 11600.0024.3954.00-29.6131.62-7.23Average100125 21600.0036.3574.00-37.6543.58-7.23Peak100125 35925.0056.9168.20-11.2955.741.17Average10089 45925.0069.6488.20-18.5668.471.17Peak10089 512210.0043.5454.00-10.4636.457.09Average100223 612210.0054.9274.00-19.0847.837.09Peak100223 Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			



Modulation	be EHT320	Test Freq. (MHz)	6105						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):24 Humidity(%):61									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	26.45	54.00	-27.55	33.68	-7.23	Average	100	248
2	1600.00	38.10	74.00	-35.90	45.33	-7.23	Peak	100	248
3	5925.00	54.81	68.20	-13.39	53.64	1.17	Average	175	244
4	5925.00	67.46	88.20	-20.74	66.29	1.17	Peak	175	244
5	12210.00	43.37	54.00	-10.63	36.28	7.09	Average	185	85
6	12210.00	54.91	74.00	-19.09	47.82	7.09	Peak	185	85
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

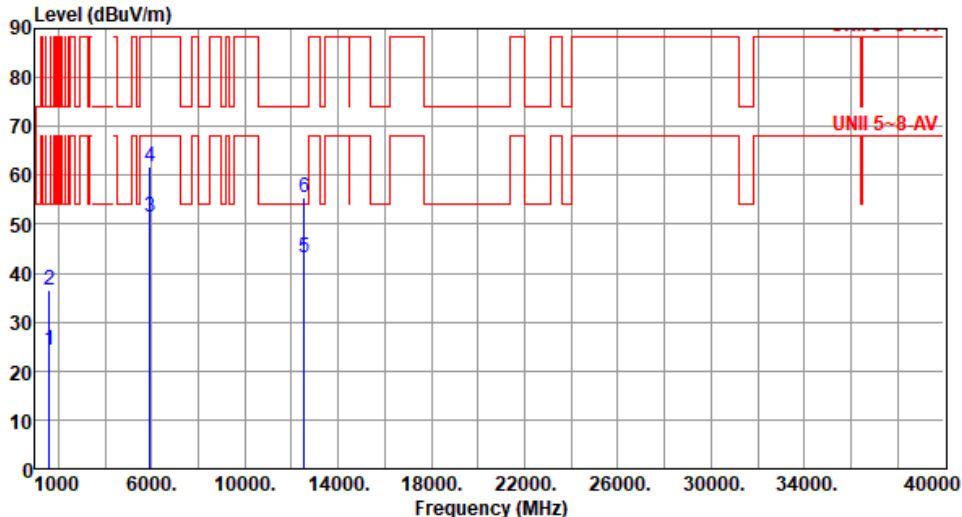


Modulation	be EHT320	Test Freq. (MHz)	6265						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	24.34	54.00	-29.66	31.57	-7.23	Average	100	123
2	1600.00	36.43	74.00	-37.57	43.66	-7.23	Peak	100	123
3	5925.00	51.35	68.20	-16.85	50.18	1.17	Average	218	84
4	5925.00	61.79	88.20	-26.41	60.62	1.17	Peak	218	84
5	12530.00	43.29	54.00	-10.71	36.33	6.96	Average	100	105
6	12530.00	55.33	74.00	-18.67	48.37	6.96	Peak	100	105
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	be EHT320	Test Freq. (MHz)	6265						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64									
Level (dBUV/m) UNII 5-8-AV Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	26.31	54.00	-27.69	33.54	-7.23	Average	100	251
2	1600.00	38.19	74.00	-35.81	45.42	-7.23	Peak	100	251
3	5925.00	50.29	68.20	-17.91	49.12	1.17	Average	156	248
4	5925.00	64.01	88.20	-24.19	62.84	1.17	Peak	156	248
5	12530.00	43.56	54.00	-10.44	36.60	6.96	Average	100	86
6	12530.00	54.42	74.00	-19.58	47.46	6.96	Peak	100	86
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

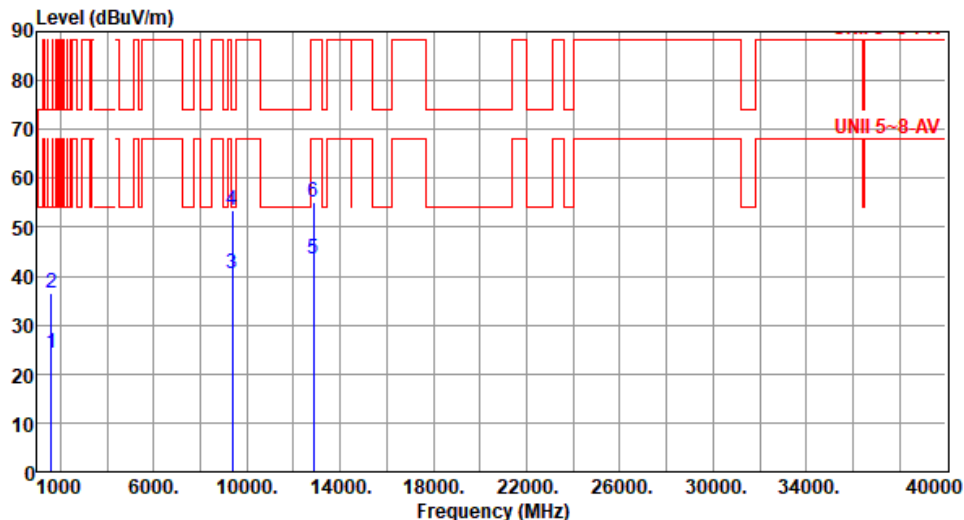

Modulation	be EHT320	Test Freq. (MHz)	6425						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	24.32	54.00	-29.68	31.55	-7.23	Average	100	133
2	1600.00	36.44	74.00	-37.56	43.67	-7.23	Peak	100	133
3	9375.00	40.50	54.00	-13.50	33.04	7.46	Average	100	156
4	9375.00	53.60	74.00	-20.40	46.14	7.46	Peak	100	156
5	12850.00	43.50	68.20	-24.70	36.67	6.83	Average	100	266
6	12850.00	55.00	88.20	-33.20	48.17	6.83	Peak	100	266
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	be EHT320	Test Freq. (MHz)	6425						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1600.00	26.24	54.00	-27.76	33.47	-7.23	Average	100	255
2	1600.00	38.28	74.00	-35.72	45.51	-7.23	Peak	100	255
3	9375.00	40.30	54.00	-13.70	32.84	7.46	Average	100	203
4	9375.00	53.19	74.00	-20.81	45.73	7.46	Peak	100	203
5	12850.00	43.47	68.20	-24.73	36.64	6.83	Average	100	305
6	12850.00	54.97	88.20	-33.23	48.14	6.83	Peak	100	305
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	be EHT320		Test Freq. (MHz)		6585																																																																										
Polarization	Horizontal																																																																														
Test By :Allen Lee Temperature(°C):22 Humidity(%):64																																																																															
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>24.36</td><td>54.00</td><td>-29.64</td><td>31.59</td><td>-7.23</td><td>Average</td><td>100</td><td>123</td></tr><tr><td>2</td><td>1600.00</td><td>36.42</td><td>74.00</td><td>-37.58</td><td>43.65</td><td>-7.23</td><td>Peak</td><td>100</td><td>123</td></tr><tr><td>3</td><td>9375.00</td><td>40.72</td><td>54.00</td><td>-13.28</td><td>33.26</td><td>7.46</td><td>Average</td><td>100</td><td>161</td></tr><tr><td>4</td><td>9375.00</td><td>53.67</td><td>74.00</td><td>-20.33</td><td>46.21</td><td>7.46</td><td>Peak</td><td>100</td><td>161</td></tr><tr><td>5</td><td>13170.00</td><td>43.28</td><td>68.20</td><td>-24.92</td><td>37.08</td><td>6.20</td><td>Average</td><td>100</td><td>8</td></tr><tr><td>6</td><td>13170.00</td><td>54.50</td><td>88.20</td><td>-33.70</td><td>48.30</td><td>6.20</td><td>Peak</td><td>100</td><td>8</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	24.36	54.00	-29.64	31.59	-7.23	Average	100	123	2	1600.00	36.42	74.00	-37.58	43.65	-7.23	Peak	100	123	3	9375.00	40.72	54.00	-13.28	33.26	7.46	Average	100	161	4	9375.00	53.67	74.00	-20.33	46.21	7.46	Peak	100	161	5	13170.00	43.28	68.20	-24.92	37.08	6.20	Average	100	8	6	13170.00	54.50	88.20	-33.70	48.30	6.20	Peak	100	8
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1600.00	24.36	54.00	-29.64	31.59	-7.23	Average	100	123																																																																						
2	1600.00	36.42	74.00	-37.58	43.65	-7.23	Peak	100	123																																																																						
3	9375.00	40.72	54.00	-13.28	33.26	7.46	Average	100	161																																																																						
4	9375.00	53.67	74.00	-20.33	46.21	7.46	Peak	100	161																																																																						
5	13170.00	43.28	68.20	-24.92	37.08	6.20	Average	100	8																																																																						
6	13170.00	54.50	88.20	-33.70	48.30	6.20	Peak	100	8																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															



Modulation	be EHT320		Test Freq. (MHz)		6585																																																																										
Polarization	Vertical																																																																														
Test By :Allen Lee Temperature(°C):22 Humidity(%):64																																																																															
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1600.00</td><td>26.34</td><td>54.00</td><td>-27.66</td><td>33.57</td><td>-7.23</td><td>Average</td><td>100</td><td>245</td></tr><tr><td>2</td><td>1600.00</td><td>38.30</td><td>74.00</td><td>-35.70</td><td>45.53</td><td>-7.23</td><td>Peak</td><td>100</td><td>245</td></tr><tr><td>3</td><td>9375.00</td><td>40.24</td><td>54.00</td><td>-13.76</td><td>32.78</td><td>7.46</td><td>Average</td><td>100</td><td>212</td></tr><tr><td>4</td><td>9375.00</td><td>53.14</td><td>74.00</td><td>-20.86</td><td>45.68</td><td>7.46</td><td>Peak</td><td>100</td><td>212</td></tr><tr><td>5</td><td>13170.00</td><td>43.51</td><td>68.20</td><td>-24.69</td><td>37.31</td><td>6.20</td><td>Average</td><td>100</td><td>307</td></tr><tr><td>6</td><td>13170.00</td><td>54.58</td><td>88.20</td><td>-33.62</td><td>48.38</td><td>6.20</td><td>Peak</td><td>100</td><td>307</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1600.00	26.34	54.00	-27.66	33.57	-7.23	Average	100	245	2	1600.00	38.30	74.00	-35.70	45.53	-7.23	Peak	100	245	3	9375.00	40.24	54.00	-13.76	32.78	7.46	Average	100	212	4	9375.00	53.14	74.00	-20.86	45.68	7.46	Peak	100	212	5	13170.00	43.51	68.20	-24.69	37.31	6.20	Average	100	307	6	13170.00	54.58	88.20	-33.62	48.38	6.20	Peak	100	307
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1600.00	26.34	54.00	-27.66	33.57	-7.23	Average	100	245																																																																						
2	1600.00	38.30	74.00	-35.70	45.53	-7.23	Peak	100	245																																																																						
3	9375.00	40.24	54.00	-13.76	32.78	7.46	Average	100	212																																																																						
4	9375.00	53.14	74.00	-20.86	45.68	7.46	Peak	100	212																																																																						
5	13170.00	43.51	68.20	-24.69	37.31	6.20	Average	100	307																																																																						
6	13170.00	54.58	88.20	-33.62	48.38	6.20	Peak	100	307																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															



Modulation	be EHT320	Test Freq. (MHz)	6745																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>56.63</td><td>68.20</td><td>-11.57</td><td>51.45</td><td>5.18</td><td>Average</td><td>207</td><td>240</td></tr><tr><td>2</td><td>7125.00</td><td>68.30</td><td>88.20</td><td>-19.90</td><td>63.12</td><td>5.18</td><td>Peak</td><td>207</td><td>240</td></tr><tr><td>3</td><td>7250.00</td><td>51.47</td><td>54.00</td><td>-2.53</td><td>45.86</td><td>5.61</td><td>Average</td><td>207</td><td>240</td></tr><tr><td>4</td><td>7250.00</td><td>64.88</td><td>74.00</td><td>-9.12</td><td>59.27</td><td>5.61</td><td>Peak</td><td>207</td><td>240</td></tr><tr><td>5</td><td>13490.00</td><td>43.74</td><td>68.20</td><td>-24.46</td><td>37.50</td><td>6.24</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>6</td><td>13490.00</td><td>56.70</td><td>88.20</td><td>-31.50</td><td>50.46</td><td>6.24</td><td>Peak</td><td>100</td><td>218</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	56.63	68.20	-11.57	51.45	5.18	Average	207	240	2	7125.00	68.30	88.20	-19.90	63.12	5.18	Peak	207	240	3	7250.00	51.47	54.00	-2.53	45.86	5.61	Average	207	240	4	7250.00	64.88	74.00	-9.12	59.27	5.61	Peak	207	240	5	13490.00	43.74	68.20	-24.46	37.50	6.24	Average	100	218	6	13490.00	56.70	88.20	-31.50	50.46	6.24	Peak	100	218
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	56.63	68.20	-11.57	51.45	5.18	Average	207	240																																																																
2	7125.00	68.30	88.20	-19.90	63.12	5.18	Peak	207	240																																																																
3	7250.00	51.47	54.00	-2.53	45.86	5.61	Average	207	240																																																																
4	7250.00	64.88	74.00	-9.12	59.27	5.61	Peak	207	240																																																																
5	13490.00	43.74	68.20	-24.46	37.50	6.24	Average	100	218																																																																
6	13490.00	56.70	88.20	-31.50	50.46	6.24	Peak	100	218																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT320	Test Freq. (MHz)	6745																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):22 Humidity(%):64																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>53.77</td><td>68.20</td><td>-14.43</td><td>48.59</td><td>5.18</td><td>Average</td><td>155</td><td>258</td></tr><tr><td>2</td><td>7125.00</td><td>65.55</td><td>88.20</td><td>-22.65</td><td>60.37</td><td>5.18</td><td>Peak</td><td>155</td><td>258</td></tr><tr><td>3</td><td>7250.00</td><td>49.83</td><td>54.00</td><td>-4.17</td><td>44.22</td><td>5.61</td><td>Average</td><td>155</td><td>258</td></tr><tr><td>4</td><td>7250.00</td><td>62.57</td><td>74.00</td><td>-11.43</td><td>56.96</td><td>5.61</td><td>Peak</td><td>155</td><td>258</td></tr><tr><td>5</td><td>13490.00</td><td>43.72</td><td>68.20</td><td>-24.48</td><td>37.48</td><td>6.24</td><td>Average</td><td>100</td><td>350</td></tr><tr><td>6</td><td>13490.00</td><td>55.68</td><td>88.20</td><td>-32.52</td><td>49.44</td><td>6.24</td><td>Peak</td><td>100</td><td>350</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	53.77	68.20	-14.43	48.59	5.18	Average	155	258	2	7125.00	65.55	88.20	-22.65	60.37	5.18	Peak	155	258	3	7250.00	49.83	54.00	-4.17	44.22	5.61	Average	155	258	4	7250.00	62.57	74.00	-11.43	56.96	5.61	Peak	155	258	5	13490.00	43.72	68.20	-24.48	37.48	6.24	Average	100	350	6	13490.00	55.68	88.20	-32.52	49.44	6.24	Peak	100	350
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	53.77	68.20	-14.43	48.59	5.18	Average	155	258																																																																
2	7125.00	65.55	88.20	-22.65	60.37	5.18	Peak	155	258																																																																
3	7250.00	49.83	54.00	-4.17	44.22	5.61	Average	155	258																																																																
4	7250.00	62.57	74.00	-11.43	56.96	5.61	Peak	155	258																																																																
5	13490.00	43.72	68.20	-24.48	37.48	6.24	Average	100	350																																																																
6	13490.00	55.68	88.20	-32.52	49.44	6.24	Peak	100	350																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT320	Test Freq. (MHz)	6905																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):24 Humidity(%):61																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>54.60</td><td>68.20</td><td>-13.60</td><td>49.42</td><td>5.18</td><td>Average</td><td>155</td><td>82</td></tr><tr><td>2</td><td>7125.00</td><td>67.28</td><td>88.20</td><td>-20.92</td><td>62.10</td><td>5.18</td><td>Peak</td><td>155</td><td>82</td></tr><tr><td>3</td><td>7250.00</td><td>49.87</td><td>54.00</td><td>-4.13</td><td>44.26</td><td>5.61</td><td>Average</td><td>155</td><td>82</td></tr><tr><td>4</td><td>7250.00</td><td>62.22</td><td>74.00</td><td>-11.78</td><td>56.61</td><td>5.61</td><td>Peak</td><td>155</td><td>82</td></tr><tr><td>5</td><td>7278.00</td><td>51.85</td><td>54.00</td><td>-2.15</td><td>46.26</td><td>5.59</td><td>Average</td><td>155</td><td>82</td></tr><tr><td>6</td><td>7278.00</td><td>67.75</td><td>74.00</td><td>-6.25</td><td>62.16</td><td>5.59</td><td>Peak</td><td>155</td><td>82</td></tr><tr><td>7</td><td>13810.00</td><td>44.14</td><td>68.20</td><td>-24.06</td><td>37.83</td><td>6.31</td><td>Average</td><td>100</td><td>97</td></tr><tr><td>8</td><td>13810.00</td><td>56.20</td><td>88.20</td><td>-32.00</td><td>49.89</td><td>6.31</td><td>Peak</td><td>100</td><td>97</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	54.60	68.20	-13.60	49.42	5.18	Average	155	82	2	7125.00	67.28	88.20	-20.92	62.10	5.18	Peak	155	82	3	7250.00	49.87	54.00	-4.13	44.26	5.61	Average	155	82	4	7250.00	62.22	74.00	-11.78	56.61	5.61	Peak	155	82	5	7278.00	51.85	54.00	-2.15	46.26	5.59	Average	155	82	6	7278.00	67.75	74.00	-6.25	62.16	5.59	Peak	155	82	7	13810.00	44.14	68.20	-24.06	37.83	6.31	Average	100	97	8	13810.00	56.20	88.20	-32.00	49.89	6.31	Peak	100	97
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	7125.00	54.60	68.20	-13.60	49.42	5.18	Average	155	82																																																																																				
2	7125.00	67.28	88.20	-20.92	62.10	5.18	Peak	155	82																																																																																				
3	7250.00	49.87	54.00	-4.13	44.26	5.61	Average	155	82																																																																																				
4	7250.00	62.22	74.00	-11.78	56.61	5.61	Peak	155	82																																																																																				
5	7278.00	51.85	54.00	-2.15	46.26	5.59	Average	155	82																																																																																				
6	7278.00	67.75	74.00	-6.25	62.16	5.59	Peak	155	82																																																																																				
7	13810.00	44.14	68.20	-24.06	37.83	6.31	Average	100	97																																																																																				
8	13810.00	56.20	88.20	-32.00	49.89	6.31	Peak	100	97																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

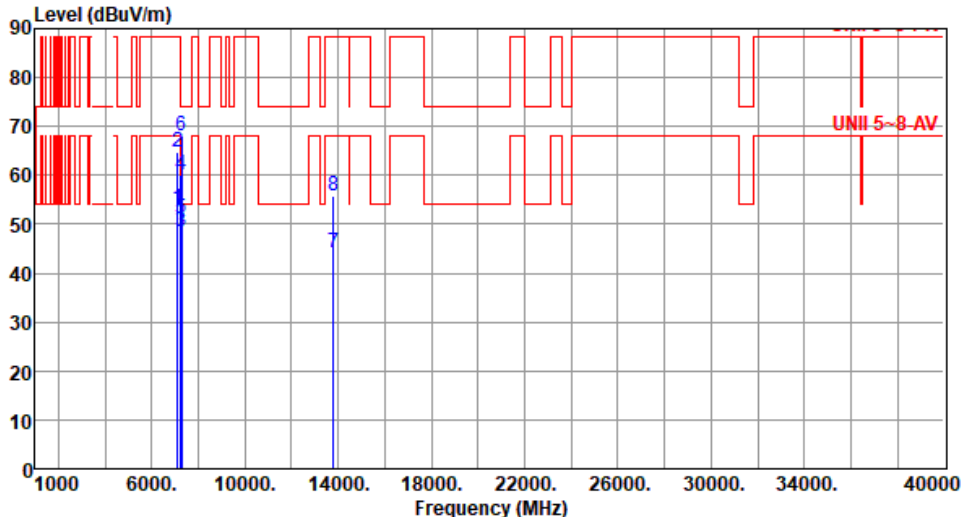

Modulation	be EHT320		Test Freq. (MHz)		6905				
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):24 Humidity(%):61									
									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1	7125.00	53.25	68.20	-14.95	48.07	5.18	Average	152	266
2	7125.00	64.84	88.20	-23.36	59.66	5.18	Peak	152	266
3	7250.00	48.48	54.00	-5.52	42.87	5.61	Average	152	266
4	7250.00	60.00	74.00	-14.00	54.39	5.61	Peak	152	266
5	7278.00	51.09	54.00	-2.91	45.50	5.59	Average	152	266
6	7278.00	67.97	74.00	-6.03	62.38	5.59	Peak	152	266
7	13810.00	44.25	68.20	-23.95	37.94	6.31	Average	184	294
8	13810.00	55.74	88.20	-32.46	49.43	6.31	Peak	184	294

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	6.4125G	-13.91	6.443G	-65.74	-53.91	-11.83	1
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	6.42359G	-13.47	6.379G	-65.68	-53.47	-12.21	1
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	6.4002G	-10.29	6.466G	-61.77	-50.29	-11.48	1
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	6.18176G	-5.35	6.0242G	-55.02	-45.35	-9.67	4
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	6.26172G	-1.40	6.3994G	-41.53	-37.04	-4.49	4
802.11be EHT320_Nss1,(MCS0)_4TX	Pass	6.2552G	-0.99	6.6554G	-41.29	-40.99	-0.30	4
6.425-6.525GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	6.46751G	-15.43	6.5033G	-65.86	-55.43	-10.43	2
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	6.44049G	-13.80	6.4048G	-65.48	-53.80	-11.68	1
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	6.42902G	-10.21	6.5062G	-61.47	-50.21	-11.26	2
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	6.50944G	-6.20	6.4238G	-57.28	-46.20	-11.08	4
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	6.42828G	-2.82	6.2914G	-47.71	-38.37	-9.34	1
802.11be EHT320_Nss1,(MCS0)_4TX	Pass	6.6937G	-0.58	6.1098G	-39.59	-39.20	-0.39	4
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	6.8578G	-14.32	6.8974G	-65.25	-54.32	-10.93	1
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	6.8501G	-13.25	6.8849G	-64.77	-53.25	-11.52	4
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	6.55001G	-10.67	6.5008G	-61.43	-50.67	-10.76	1
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	6.59063G	-6.11	6.5038G	-56.62	-46.11	-10.51	1
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	6.79223G	-2.98	6.629G	-42.59	-35.93	-6.66	4
802.11be EHT320_Nss1,(MCS0)_4TX	Pass	6.873G	-2.92	6.3642G	-44.49	-42.92	-1.57	4
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	6.8912G	-13.43	6.9234G	-64.63	-53.43	-11.20	1
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	6.8911G	-12.09	6.9252G	-64.42	-52.09	-12.33	4
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	6.91161G	-9.02	6.9902G	-59.96	-49.02	-10.94	3
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	7.06096G	-6.74	6.9046G	-57.55	-46.74	-10.81	2
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	6.95063G	-2.55	6.7794G	-41.29	-36.89	-4.40	4

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.96129G	-13.14	5.9836G	-66.28	-53.14	-13.14	1
5955MHz	Pass	5.96189G	-13.02	5.9831G	-66.35	-53.02	-13.33	2
5955MHz	Pass	5.96249G	-12.95	5.9907G	-66.32	-52.95	-13.37	3
5955MHz	Pass	5.96G	-13.15	5.9826G	-66.35	-53.15	-13.20	4
6175MHz	Pass	6.16781G	-13.78	6.2043G	-66.26	-53.78	-12.48	1
6175MHz	Pass	6.1763G	-13.15	6.2035G	-66.10	-53.15	-12.95	2
6175MHz	Pass	6.1713G	-13.48	6.203G	-65.94	-53.48	-12.46	3
6175MHz	Pass	6.16971G	-13.73	6.2041G	-66.38	-53.73	-12.65	4
6415MHz	Pass	6.4125G	-13.91	6.443G	-65.74	-53.91	-11.83	1
6415MHz	Pass	6.40811G	-13.25	6.4466G	-65.80	-53.25	-12.55	2
6415MHz	Pass	6.40971G	-13.12	6.4459G	-65.68	-53.12	-12.56	3
6415MHz	Pass	6.42159G	-13.37	6.4442G	-65.66	-53.37	-12.29	4
6435MHz	Pass	6.42941G	-14.24	6.4663G	-65.84	-54.24	-11.60	1
6435MHz	Pass	6.4372G	-14.25	6.4642G	-65.67	-54.25	-11.42	2
6435MHz	Pass	6.4397G	-13.72	6.4714G	-65.61	-53.72	-11.89	3
6435MHz	Pass	6.4313G	-13.94	6.4632G	-65.52	-53.94	-11.58	4
6475MHz	Pass	6.4719G	-15.07	6.5031G	-65.67	-55.07	-10.60	1
6475MHz	Pass	6.46751G	-15.43	6.5033G	-65.86	-55.43	-10.43	2
6475MHz	Pass	6.476G	-14.36	6.5056G	-65.40	-54.36	-11.04	3
6475MHz	Pass	6.46911G	-14.60	6.5077G	-65.70	-54.60	-11.10	4
6515MHz	Pass	6.5128G	-14.65	6.4853G	-65.73	-54.65	-11.08	1
6515MHz	Pass	6.5141G	-14.15	6.4818G	-65.58	-54.15	-11.43	2
6515MHz	Pass	6.5131G	-14.10	6.4828G	-65.64	-54.10	-11.54	3
6515MHz	Pass	6.5163G	-14.05	6.4843G	-65.66	-54.05	-11.61	4
6535MHz	Pass	6.5328G	-14.11	6.5024G	-65.58	-54.11	-11.47	1
6535MHz	Pass	6.53G	-12.99	6.5071G	-65.61	-52.99	-12.62	2
6535MHz	Pass	6.5331G	-13.48	6.5031G	-65.33	-53.48	-11.85	3
6535MHz	Pass	6.5397G	-13.49	6.5069G	-65.39	-53.49	-11.90	4
6715MHz	Pass	6.71G	-14.66	6.7476G	-66.46	-54.66	-11.80	1
6715MHz	Pass	6.7197G	-13.77	6.7498G	-66.26	-53.77	-12.49	2
6715MHz	Pass	6.71G	-14.11	6.743G	-66.17	-54.11	-12.06	3
6715MHz	Pass	6.7106G	-14.12	6.7461G	-66.38	-54.12	-12.26	4
6855MHz	Pass	6.8578G	-14.32	6.8974G	-65.25	-54.32	-10.93	1
6855MHz	Pass	6.86189G	-13.97	6.893G	-65.18	-53.97	-11.21	2
6855MHz	Pass	6.8575G	-14.00	6.8847G	-65.12	-54.00	-11.12	3
6855MHz	Pass	6.85G	-13.87	6.9034G	-65.13	-53.87	-11.26	4
6875MHz Straddle 6.525-6.875GHz	Pass	6.87G	-13.74	6.9203G	-65.01	-53.74	-11.27	1
6875MHz Straddle 6.525-6.875GHz	Pass	6.87G	-12.94	6.9154G	-64.96	-52.94	-12.02	2
6875MHz Straddle 6.525-6.875GHz	Pass	6.8794G	-13.25	6.906G	-64.92	-53.25	-11.67	3
6875MHz Straddle 6.525-6.875GHz	Pass	6.8769G	-13.25	6.904G	-65.06	-53.25	-11.81	4
6895MHz	Pass	6.8912G	-13.43	6.9234G	-64.63	-53.43	-11.20	1

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6895MHz	Pass	6.8928G	-12.81	6.9255G	-64.68	-52.81	-11.87	2
6895MHz	Pass	6.88941G	-12.73	6.9244G	-64.67	-52.73	-11.94	3
6895MHz	Pass	6.90159G	-13.04	6.9437G	-64.83	-53.04	-11.79	4
7015MHz	Pass	7.00881G	-11.79	6.9853G	-64.05	-51.79	-12.26	1
7015MHz	Pass	7.0197G	-12.99	6.9823G	-64.52	-52.99	-11.53	2
7015MHz	Pass	7.0178G	-11.93	6.9868G	-64.41	-51.93	-12.48	3
7015MHz	Pass	7.01G	-12.46	6.9796G	-64.15	-52.46	-11.69	4
7095MHz	Pass	7.0969G	-13.22	7.1292G	-65.36	-53.22	-12.14	1
7095MHz	Pass	7.08811G	-12.71	7.1298G	-65.26	-52.71	-12.55	2
7095MHz	Pass	7.10219G	-12.58	7.1235G	-65.22	-52.58	-12.64	3
7095MHz	Pass	7.0925G	-12.68	7.1339G	-65.12	-52.68	-12.44	4
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.96419G	-13.36	5.9241G	-65.94	-53.36	-12.58	1
5955MHz	Pass	5.96119G	-13.63	5.9862G	-66.34	-53.63	-12.71	2
5955MHz	Pass	5.96129G	-13.49	5.9888G	-66.39	-53.49	-12.90	3
5955MHz	Pass	5.96019G	-13.74	5.9849G	-66.23	-53.74	-12.49	4
6175MHz	Pass	6.18349G	-13.28	6.2187G	-66.16	-53.28	-12.88	1
6175MHz	Pass	6.16731G	-12.76	6.1447G	-66.08	-52.76	-13.32	2
6175MHz	Pass	6.17G	-12.75	6.2061G	-66.21	-52.75	-13.46	3
6175MHz	Pass	6.18159G	-13.42	6.2081G	-66.18	-53.42	-12.76	4
6415MHz	Pass	6.42359G	-13.47	6.379G	-65.68	-53.47	-12.21	1
6415MHz	Pass	6.4193G	-12.83	6.4569G	-65.56	-52.83	-12.73	2
6415MHz	Pass	6.40671G	-12.70	6.4479G	-65.34	-52.70	-12.64	3
6415MHz	Pass	6.4178G	-12.32	6.4475G	-65.54	-52.32	-13.22	4
6435MHz	Pass	6.44049G	-13.80	6.4048G	-65.48	-53.80	-11.68	1
6435MHz	Pass	6.42961G	-13.39	6.4657G	-65.49	-53.39	-12.10	2
6435MHz	Pass	6.44139G	-12.81	6.4659G	-65.52	-52.81	-12.71	3
6435MHz	Pass	6.42761G	-13.07	6.4687G	-65.52	-53.07	-12.45	4
6475MHz	Pass	6.4737G	-13.66	6.5052G	-65.41	-53.66	-11.75	1
6475MHz	Pass	6.4793G	-13.69	6.5079G	-65.52	-53.69	-11.83	2
6475MHz	Pass	6.48109G	-12.88	6.5087G	-65.43	-52.88	-12.55	3
6475MHz	Pass	6.46751G	-13.10	6.5059G	-65.39	-53.10	-12.29	4
6515MHz	Pass	6.52279G	-13.44	6.4761G	-65.65	-53.44	-12.21	1
6515MHz	Pass	6.51G	-12.52	6.4827G	-65.58	-52.52	-13.06	2
6515MHz	Pass	6.50631G	-11.91	6.4842G	-65.29	-51.91	-13.38	3
6515MHz	Pass	6.50671G	-12.21	6.4835G	-65.29	-52.21	-13.08	4
6535MHz	Pass	6.52871G	-13.55	6.505G	-65.60	-53.55	-12.05	1
6535MHz	Pass	6.5305G	-12.45	6.5047G	-65.17	-52.45	-12.72	2
6535MHz	Pass	6.52751G	-12.27	6.5044G	-65.09	-52.27	-12.82	3
6535MHz	Pass	6.54389G	-12.46	6.503G	-65.31	-52.46	-12.85	4
6715MHz	Pass	6.72139G	-12.71	6.7476G	-66.18	-52.71	-13.47	1
6715MHz	Pass	6.7195G	-12.13	6.7456G	-65.75	-52.13	-13.62	2

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6715MHz	Pass	6.70641G	-12.41	6.7453G	-65.80	-52.41	-13.39	3
6715MHz	Pass	6.7102G	-12.26	6.752G	-65.94	-52.26	-13.68	4
6855MHz	Pass	6.84901G	-13.56	6.8989G	-65.13	-53.56	-11.57	1
6855MHz	Pass	6.857G	-12.99	6.8927G	-65.02	-52.99	-12.03	2
6855MHz	Pass	6.8584G	-12.91	6.8992G	-64.84	-52.91	-11.93	3
6855MHz	Pass	6.8501G	-13.25	6.8849G	-64.77	-53.25	-11.52	4
6875MHz Straddle 6.525-6.875GHz	Pass	6.87G	-13.28	6.9056G	-64.89	-53.28	-11.61	1
6875MHz Straddle 6.525-6.875GHz	Pass	6.86701G	-12.34	6.9087G	-64.59	-52.34	-12.25	2
6875MHz Straddle 6.525-6.875GHz	Pass	6.86901G	-12.46	6.907G	-64.94	-52.46	-12.48	3
6875MHz Straddle 6.525-6.875GHz	Pass	6.8726G	-12.92	6.911G	-64.86	-52.92	-11.94	4
6895MHz	Pass	6.88811G	-11.79	6.9277G	-64.67	-51.79	-12.88	1
6895MHz	Pass	6.88831G	-11.67	6.9277G	-64.14	-51.67	-12.47	2
6895MHz	Pass	6.8997G	-11.71	6.9286G	-64.64	-51.71	-12.93	3
6895MHz	Pass	6.8911G	-12.09	6.9252G	-64.42	-52.09	-12.33	4
7015MHz	Pass	7.00761G	-10.82	6.9846G	-63.61	-50.82	-12.79	1
7015MHz	Pass	7.0182G	-11.80	6.9809G	-64.31	-51.80	-12.51	2
7015MHz	Pass	7.00861G	-11.14	6.9825G	-64.01	-51.14	-12.87	3
7015MHz	Pass	7.02159G	-11.57	6.9852G	-64.09	-51.56	-12.53	4
7095MHz	Pass	7.0902G	-12.04	7.1263G	-64.98	-52.04	-12.94	1
7095MHz	Pass	7.08931G	-11.86	7.1288G	-65.06	-51.86	-13.20	2
7095MHz	Pass	7.09G	-11.38	7.1252G	-64.79	-51.38	-13.41	3
7095MHz	Pass	7.10249G	-11.47	7.1252G	-64.82	-51.47	-13.35	4
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5965MHz	Pass	5.95641G	-8.54	6.0262G	-62.06	-48.54	-13.52	1
5965MHz	Pass	5.98138G	-8.88	6.0254G	-62.08	-48.88	-13.20	2
5965MHz	Pass	5.98038G	-8.52	6.025G	-62.01	-48.52	-13.49	3
5965MHz	Pass	5.97839G	-8.46	6.0264G	-62.04	-48.46	-13.58	4
6165MHz	Pass	6.15361G	-9.36	6.2362G	-62.08	-49.36	-12.72	1
6165MHz	Pass	6.18258G	-8.83	6.2252G	-62.07	-48.83	-13.24	2
6165MHz	Pass	6.15061G	-8.90	6.237G	-62.08	-48.90	-13.18	3
6165MHz	Pass	6.17899G	-9.26	6.1022G	-62.22	-49.26	-12.96	4
6405MHz	Pass	6.4002G	-10.29	6.466G	-61.77	-50.29	-11.48	1
6405MHz	Pass	6.38762G	-9.96	6.4672G	-61.66	-49.96	-11.70	2
6405MHz	Pass	6.38902G	-9.11	6.466G	-61.49	-49.11	-12.38	3
6405MHz	Pass	6.38942G	-9.50	6.4674G	-61.67	-49.50	-12.17	4
6445MHz	Pass	6.45959G	-10.02	6.5076G	-61.53	-50.02	-11.51	1
6445MHz	Pass	6.42902G	-10.21	6.5062G	-61.47	-50.21	-11.26	2
6445MHz	Pass	6.45999G	-8.99	6.5076G	-61.64	-48.99	-12.65	3
6445MHz	Pass	6.45019G	-9.20	6.5064G	-61.60	-49.20	-12.40	4
6485MHz	Pass	6.47541G	-9.98	6.4234G	-61.66	-49.98	-11.68	1
6485MHz	Pass	6.50278G	-9.82	6.4212G	-61.87	-49.82	-12.05	2
6485MHz	Pass	6.49379G	-9.12	6.424G	-61.43	-49.12	-12.31	3

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6485MHz	Pass	6.47901G	-9.37	6.4214G	-61.60	-49.37	-12.23	4
6525MHz Straddle 6.425-6.525GHz	Pass	6.50702G	-9.20	6.4564G	-61.69	-49.20	-12.49	1
6525MHz Straddle 6.425-6.525GHz	Pass	6.50682G	-8.37	6.465G	-61.21	-48.37	-12.84	2
6525MHz Straddle 6.425-6.525GHz	Pass	6.50982G	-8.45	6.4652G	-61.47	-48.45	-13.02	3
6525MHz Straddle 6.425-6.525GHz	Pass	6.51281G	-8.57	6.4608G	-61.17	-48.57	-12.60	4
6565MHz	Pass	6.55001G	-10.67	6.5008G	-61.43	-50.67	-10.76	1
6565MHz	Pass	6.57959G	-9.85	6.5016G	-61.52	-49.85	-11.67	2
6565MHz	Pass	6.55001G	-10.11	6.5052G	-61.29	-50.11	-11.18	3
6565MHz	Pass	6.568G	-9.94	6.5038G	-61.51	-49.94	-11.57	4
6725MHz	Pass	6.71041G	-8.38	6.7898G	-61.55	-48.38	-13.17	1
6725MHz	Pass	6.71301G	-7.68	6.798G	-61.35	-47.68	-13.67	2
6725MHz	Pass	6.73979G	-8.12	6.8164G	-61.56	-48.12	-13.44	3
6725MHz	Pass	6.71181G	-8.42	6.6648G	-61.16	-48.42	-12.74	4
6845MHz	Pass	6.84G	-9.19	6.9164G	-60.76	-49.19	-11.57	1
6845MHz	Pass	6.86178G	-8.37	6.9052G	-60.54	-48.37	-12.17	2
6845MHz	Pass	6.85379G	-8.28	6.906G	-60.59	-48.28	-12.31	3
6845MHz	Pass	6.86258G	-8.86	6.9082G	-60.60	-48.86	-11.74	4
6885MHz Straddle 6.525-6.875GHz	Pass	6.87141G	-7.43	6.9472G	-59.85	-47.43	-12.42	1
6885MHz Straddle 6.525-6.875GHz	Pass	6.87961G	-7.17	6.9456G	-59.63	-47.17	-12.46	2
6885MHz Straddle 6.525-6.875GHz	Pass	6.87621G	-6.77	6.9456G	-59.83	-46.77	-13.06	3
6885MHz Straddle 6.525-6.875GHz	Pass	6.8878G	-7.58	6.9458G	-59.78	-47.58	-12.20	4
6925MHz	Pass	6.90962G	-8.28	6.9888G	-59.85	-48.28	-11.57	1
6925MHz	Pass	6.91321G	-8.38	6.9858G	-60.01	-48.38	-11.63	2
6925MHz	Pass	6.91161G	-9.02	6.9902G	-59.96	-49.02	-10.94	3
6925MHz	Pass	6.94118G	-8.91	6.9896G	-59.94	-48.91	-11.03	4
7005MHz	Pass	7.01919G	-7.64	6.9442G	-59.51	-47.64	-11.87	1
7005MHz	Pass	6.99181G	-8.84	6.945G	-60.15	-48.84	-11.31	2
7005MHz	Pass	7.01999G	-7.87	6.9446G	-60.00	-47.87	-12.13	3
7005MHz	Pass	7.01959G	-8.31	6.9456G	-60.00	-48.31	-11.69	4
7085MHz	Pass	7.07941G	-8.16	7.0092G	-60.06	-48.16	-11.90	1
7085MHz	Pass	7.0892G	-8.13	7.0082G	-60.07	-48.13	-11.94	2
7085MHz	Pass	7.07501G	-7.65	7.0084G	-59.99	-47.65	-12.34	3
7085MHz	Pass	7.06982G	-7.79	7.0086G	-59.89	-47.79	-12.10	4
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5985MHz	Pass	5.96222G	-5.11	6.1054G	-59.00	-45.11	-13.89	1
5985MHz	Pass	5.97701G	-5.95	6.1054G	-58.88	-45.95	-12.93	2
5985MHz	Pass	6.01537G	-5.63	6.1058G	-58.84	-45.63	-13.21	3
5985MHz	Pass	6.01697G	-5.51	6.1074G	-58.96	-45.51	-13.45	4
6145MHz	Pass	6.18016G	-5.99	6.2654G	-58.46	-45.99	-12.47	1
6145MHz	Pass	6.11183G	-4.86	6.0246G	-55.15	-44.86	-10.29	2
6145MHz	Pass	6.18016G	-5.38	6.0246G	-58.10	-45.38	-12.72	3
6145MHz	Pass	6.18176G	-5.35	6.0242G	-55.02	-45.35	-9.67	4

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6385MHz	Pass	6.42296G	-5.89	6.5066G	-58.29	-45.89	-12.40	1
6385MHz	Pass	6.35463G	-5.54	6.5054G	-58.07	-45.54	-12.53	2
6385MHz	Pass	6.34704G	-5.15	6.5054G	-58.14	-45.15	-12.99	3
6385MHz	Pass	6.34984G	-5.47	6.2642G	-56.47	-45.47	-11.00	4
6465MHz	Pass	6.50256G	-6.35	6.3342G	-58.27	-46.35	-11.92	1
6465MHz	Pass	6.42904G	-6.15	6.3442G	-58.50	-46.15	-12.35	2
6465MHz	Pass	6.50136G	-5.25	6.3442G	-58.13	-45.25	-12.88	3
6465MHz	Pass	6.42744G	-5.83	6.345G	-58.43	-45.71	-12.72	4
6545MHz Straddle 6.425-6.525GHz	Pass	6.50824G	-6.38	6.4186G	-58.24	-46.38	-11.86	1
6545MHz Straddle 6.425-6.525GHz	Pass	6.58016G	-5.81	6.421G	-58.30	-45.81	-12.49	2
6545MHz Straddle 6.425-6.525GHz	Pass	6.50864G	-5.84	6.4222G	-58.21	-45.84	-12.37	3
6545MHz Straddle 6.425-6.525GHz	Pass	6.50944G	-6.20	6.4238G	-57.28	-46.20	-11.08	4
6625MHz	Pass	6.59063G	-6.11	6.5038G	-56.62	-46.11	-10.51	1
6625MHz	Pass	6.59263G	-5.55	6.5022G	-56.88	-45.55	-11.33	2
6625MHz	Pass	6.59023G	-5.89	6.5046G	-56.60	-45.89	-10.71	3
6625MHz	Pass	6.60102G	-5.92	6.5042G	-56.91	-45.92	-10.99	4
6705MHz	Pass	6.66704G	-6.01	6.8258G	-57.45	-46.01	-11.44	1
6705MHz	Pass	6.66904G	-5.05	6.5822G	-57.25	-45.05	-12.20	2
6705MHz	Pass	6.73897G	-5.45	6.5846G	-57.25	-45.45	-11.80	3
6705MHz	Pass	6.66744G	-5.74	6.585G	-57.27	-45.62	-11.65	4
6785MHz	Pass	6.81897G	-6.35	6.9782G	-57.16	-46.35	-10.81	1
6785MHz	Pass	6.81897G	-6.24	6.9802G	-57.24	-46.24	-11.00	2
6785MHz	Pass	6.81937G	-5.68	6.9138G	-57.08	-45.68	-11.40	3
6785MHz	Pass	6.82256G	-6.53	6.9786G	-57.33	-46.53	-10.80	4
6865MHz Straddle 6.525-6.875GHz	Pass	6.83663G	-5.33	6.9886G	-56.86	-45.33	-11.53	1
6865MHz Straddle 6.525-6.875GHz	Pass	6.90016G	-5.08	6.9858G	-56.59	-45.08	-11.51	2
6865MHz Straddle 6.525-6.875GHz	Pass	6.83143G	-4.71	6.9858G	-56.66	-44.71	-11.95	3
6865MHz Straddle 6.525-6.875GHz	Pass	6.82984G	-5.29	6.9858G	-56.71	-45.29	-11.42	4
6945MHz	Pass	6.91023G	-4.86	6.8234G	-57.63	-44.86	-12.77	1
6945MHz	Pass	6.91223G	-4.96	6.8246G	-57.47	-44.96	-12.51	2
6945MHz	Pass	6.90704G	-4.99	6.8246G	-57.46	-44.99	-12.47	3
6945MHz	Pass	6.98176G	-5.27	6.8474G	-50.55	-38.46	-12.09	4
7025MHz	Pass	7.05857G	-5.94	6.9042G	-57.23	-45.94	-11.29	1
7025MHz	Pass	7.06096G	-6.74	6.9046G	-57.55	-46.74	-10.81	2
7025MHz	Pass	7.06216G	-5.93	6.905G	-57.17	-45.81	-11.36	3
7025MHz	Pass	7.06256G	-6.42	6.9038G	-57.40	-46.42	-10.98	4
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.07215G	-3.03	6.2682G	-50.74	-42.92	-7.82	1
6025MHz	Pass	5.97945G	-2.44	6.269G	-49.76	-42.44	-7.32	2
6025MHz	Pass	5.98904G	-2.44	6.2706G	-50.87	-42.44	-8.43	3
6025MHz	Pass	5.98024G	-2.48	6.269G	-51.64	-42.48	-9.16	4
6185MHz	Pass	6.24014G	-1.63	6.4018G	-43.61	-37.63	-5.98	1

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6185MHz	Pass	6.25853G	-1.72	6.4026G	-43.07	-37.83	-5.24	2
6185MHz	Pass	6.24974G	-1.64	6.401G	-43.10	-37.52	-5.58	3
6185MHz	Pass	6.26172G	-1.40	6.3994G	-41.53	-37.04	-4.49	4
6345MHz	Pass	6.27227G	-3.44	6.0914G	-52.50	-43.44	-9.06	1
6345MHz	Pass	6.26908G	-3.57	6.1002G	-52.34	-43.57	-8.77	2
6345MHz	Pass	6.27947G	-3.30	6.0882G	-51.76	-43.30	-8.46	3
6345MHz	Pass	6.26988G	-3.43	6.0922G	-50.75	-43.43	-7.32	4
6505MHz Straddle 6.425-6.525GHz	Pass	6.42828G	-2.82	6.2914G	-47.71	-38.37	-9.34	1
6505MHz Straddle 6.425-6.525GHz	Pass	6.48022G	-2.19	6.257G	-52.41	-42.19	-10.22	2
6505MHz Straddle 6.425-6.525GHz	Pass	6.42828G	-2.13	6.257G	-52.59	-42.13	-10.46	3
6505MHz Straddle 6.425-6.525GHz	Pass	6.43787G	-2.40	6.2522G	-52.74	-42.40	-10.34	4
6665MHz	Pass	6.74012G	-2.70	6.8826G	-46.74	-38.81	-7.93	1
6665MHz	Pass	6.58908G	-2.54	6.9098G	-51.92	-42.54	-9.38	2
6665MHz	Pass	6.58828G	-1.98	6.881G	-47.29	-37.86	-9.43	3
6665MHz	Pass	6.58828G	-2.46	6.465G	-44.52	-35.98	-8.54	4
6825MHz Straddle 6.525-6.875GHz	Pass	6.80902G	-2.78	6.6186G	-47.28	-37.31	-9.97	1
6825MHz Straddle 6.525-6.875GHz	Pass	6.80022G	-3.08	6.505G	-53.89	-43.08	-10.81	2
6825MHz Straddle 6.525-6.875GHz	Pass	6.84818G	-2.56	7.0386G	-48.37	-38.16	-10.21	3
6825MHz Straddle 6.525-6.875GHz	Pass	6.79223G	-2.98	6.629G	-42.59	-35.93	-6.66	4
6985MHz	Pass	6.94824G	-2.41	6.7818G	-43.16	-36.50	-6.66	1
6985MHz	Pass	6.95463G	-2.12	6.7178G	-49.89	-42.12	-7.77	2
6985MHz	Pass	6.90828G	-1.70	6.7802G	-42.35	-35.93	-6.42	3
6985MHz	Pass	6.95063G	-2.55	6.7794G	-41.29	-36.89	-4.40	4
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.1977G	-1.98	6.657G	-48.52	-41.98	-6.54	1
6105MHz	Pass	6.1338G	-1.67	6.5946G	-47.56	-41.45	-6.11	2
6105MHz	Pass	6.2568G	-2.13	6.6346G	-47.13	-42.13	-5.00	3
6105MHz	Pass	6.2552G	-0.99	6.6554G	-41.29	-40.99	-0.30	4
6265MHz	Pass	6.2378G	-1.56	6.8346G	-42.69	-41.56	-1.13	1
6265MHz	Pass	6.241G	-2.43	6.6554G	-40.39	-34.87	-5.52	2
6265MHz	Pass	6.2938G	-2.16	6.6346G	-38.45	-33.17	-5.28	3
6265MHz	Pass	6.273G	-2.07	6.8346G	-45.09	-42.07	-3.02	4
6425MHz Straddle 5.925-6.425GHz	Pass	6.4777G	-1.98	6.0218G	-37.67	-35.54	-2.13	1
6425MHz Straddle 5.925-6.425GHz	Pass	6.5784G	-2.03	5.9338G	-47.18	-41.81	-5.37	2
6425MHz Straddle 5.925-6.425GHz	Pass	6.4937G	-2.11	5.9802G	-44.43	-38.51	-5.92	3
6425MHz Straddle 5.925-6.425GHz	Pass	6.2811G	-3.24	6.0026G	-39.68	-38.11	-1.57	4
6585MHz Straddle 6.425-6.525GHz	Pass	6.4779G	-0.68	6.9786G	-36.45	-33.35	-3.10	1
6585MHz Straddle 6.425-6.525GHz	Pass	6.7209G	-1.06	6.033G	-45.12	-41.06	-4.06	2
6585MHz Straddle 6.425-6.525GHz	Pass	6.5578G	-1.03	6.1434G	-41.42	-37.20	-4.22	3
6585MHz Straddle 6.425-6.525GHz	Pass	6.6937G	-0.58	6.1098G	-39.59	-39.20	-0.39	4
6745MHz Straddle 6.525-6.875GHz	Pass	6.7002G	-0.51	6.2778G	-42.68	-38.65	-4.03	1
6745MHz Straddle 6.525-6.875GHz	Pass	6.8329G	-0.07	6.0906G	-43.71	-40.07	-3.64	2




Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6745MHz Straddle 6.525-6.875GHz	Pass	6.697G	-0.38	6.2682G	-40.98	-39.22	-1.76	3
6745MHz Straddle 6.525-6.875GHz	Pass	6.8377G	-0.29	6.449G	-25.51	-22.53	-2.98	4
6905MHz Straddle 6.525-6.875GHz	Pass	6.7739G	-1.94	6.3386G	-44.03	-39.73	-4.30	1
6905MHz Straddle 6.525-6.875GHz	Pass	6.7579G	-3.02	6.4106G	-46.59	-43.02	-3.57	2
6905MHz Straddle 6.525-6.875GHz	Pass	6.8586G	-2.67	6.4122G	-45.60	-42.67	-2.93	3
6905MHz Straddle 6.525-6.875GHz	Pass	6.873G	-2.92	6.3642G	-44.49	-42.92	-1.57	4



5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


5955MHz_TX

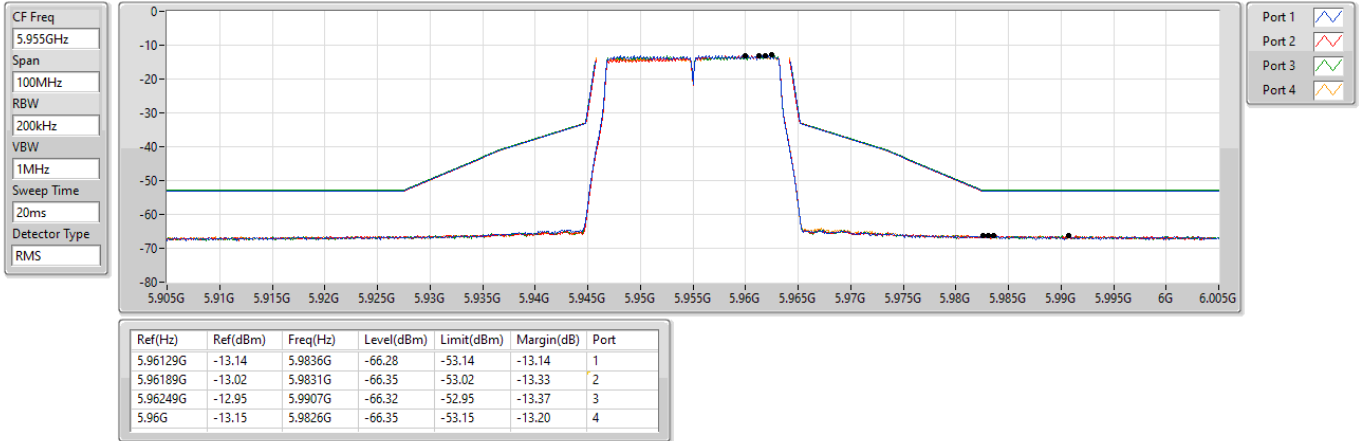

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6175MHz_TX

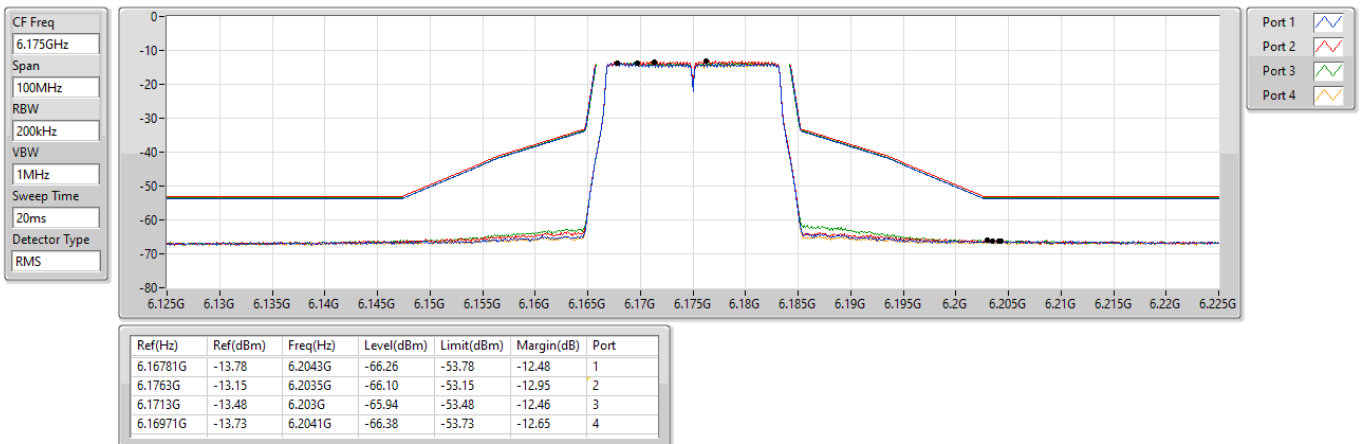

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6415MHz_TX

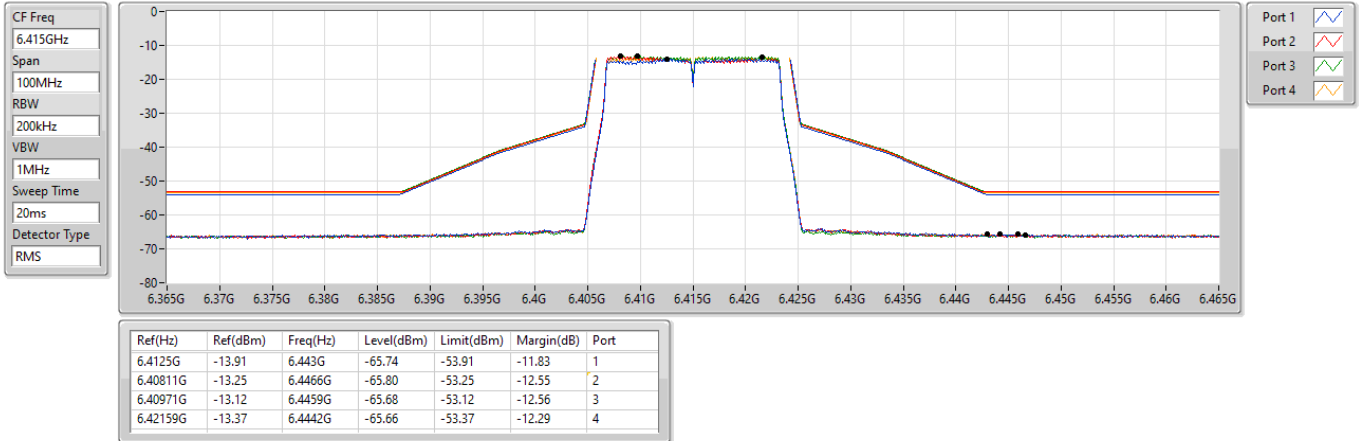

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6435MHz_TX

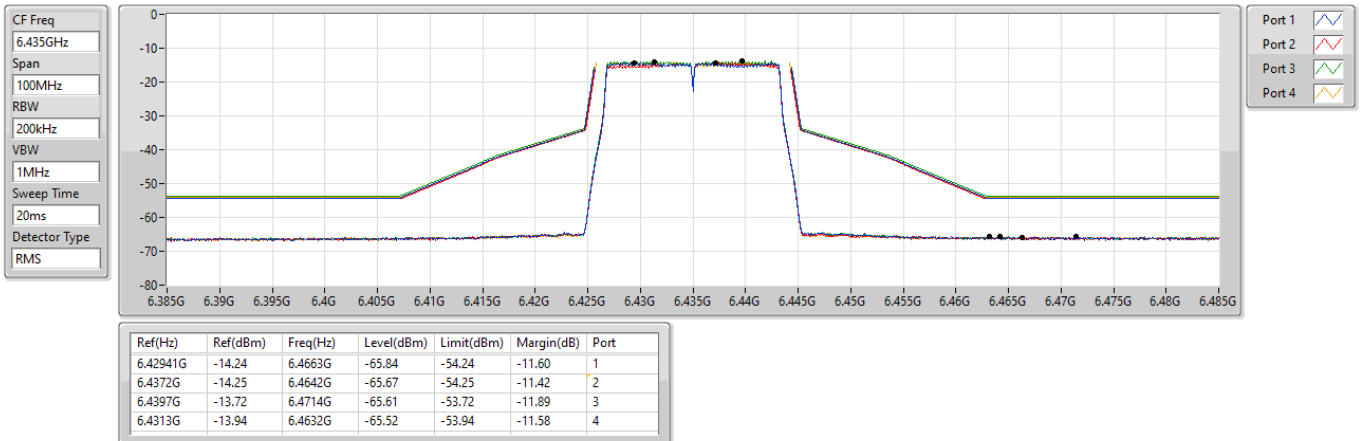

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6475MHz_TX

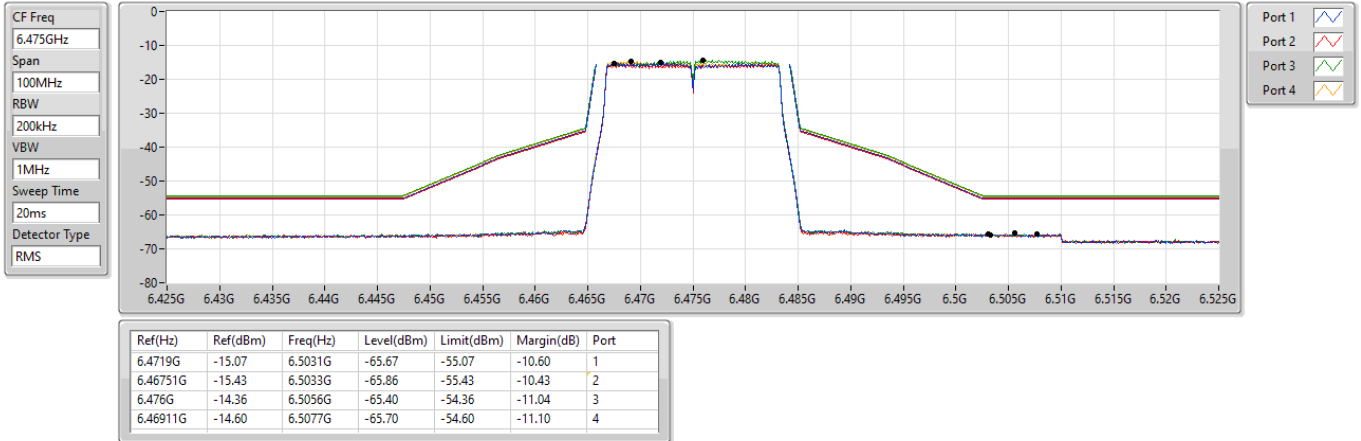

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6515MHz_TX

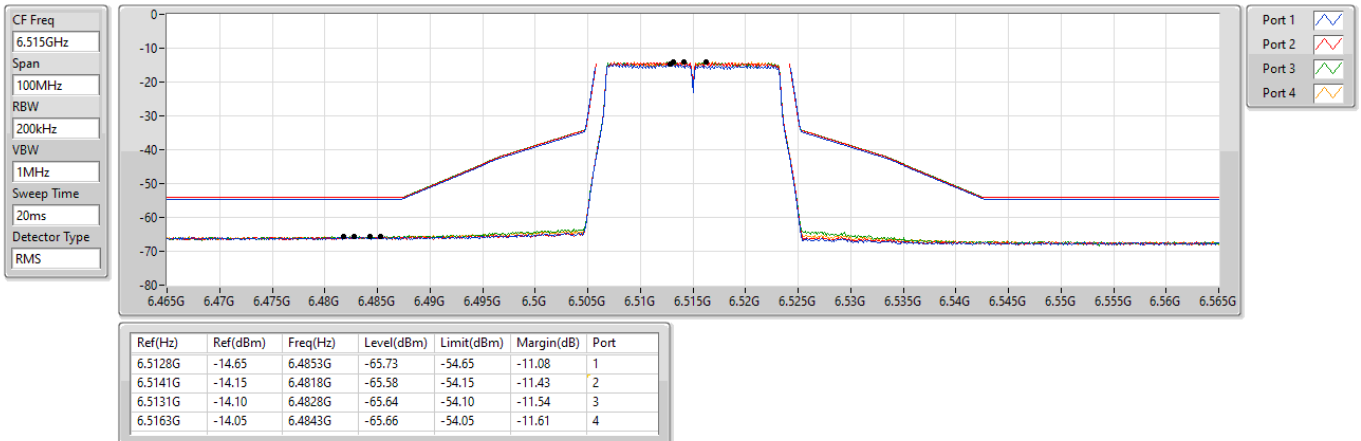

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6535MHz_TX

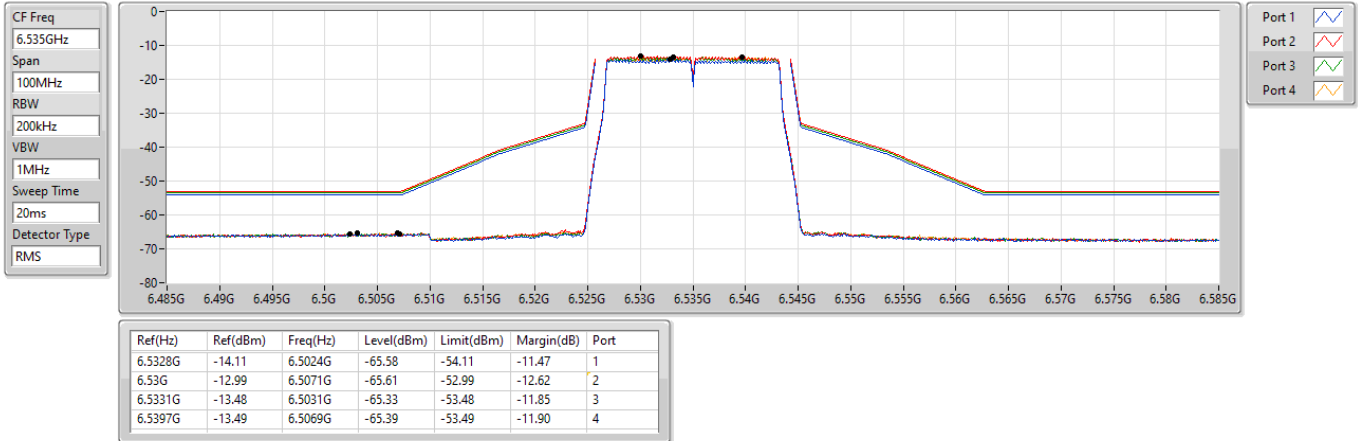

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6715MHz_TX

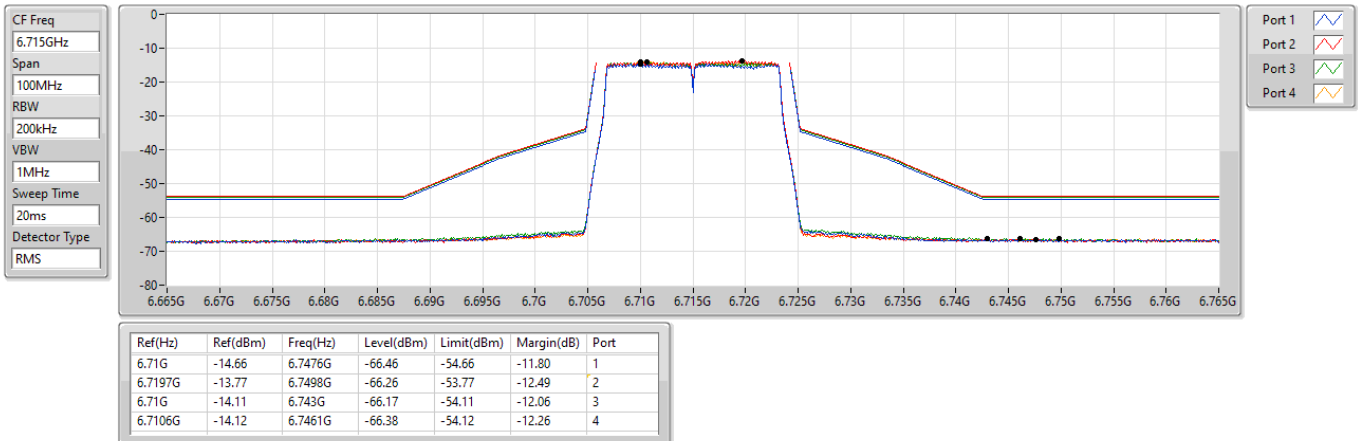

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6855MHz_TX

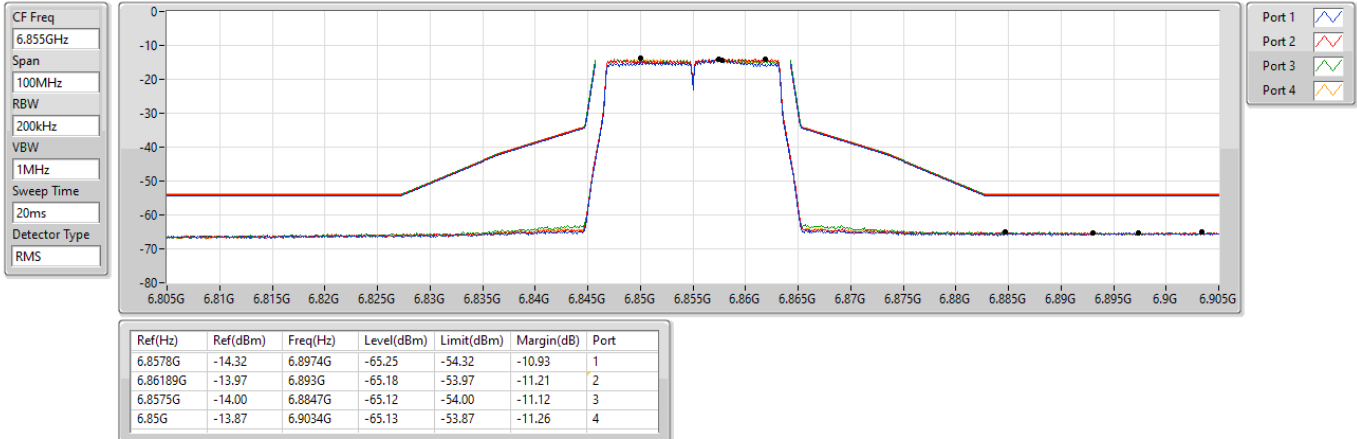

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6875MHz Straddle 6.525-6.875GHz_TX

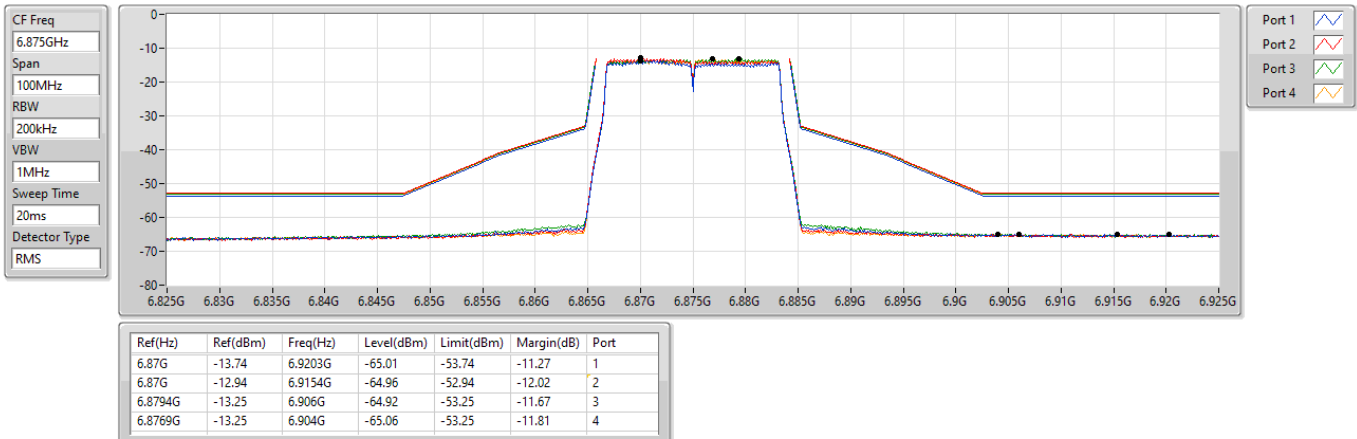

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6895MHz_TX

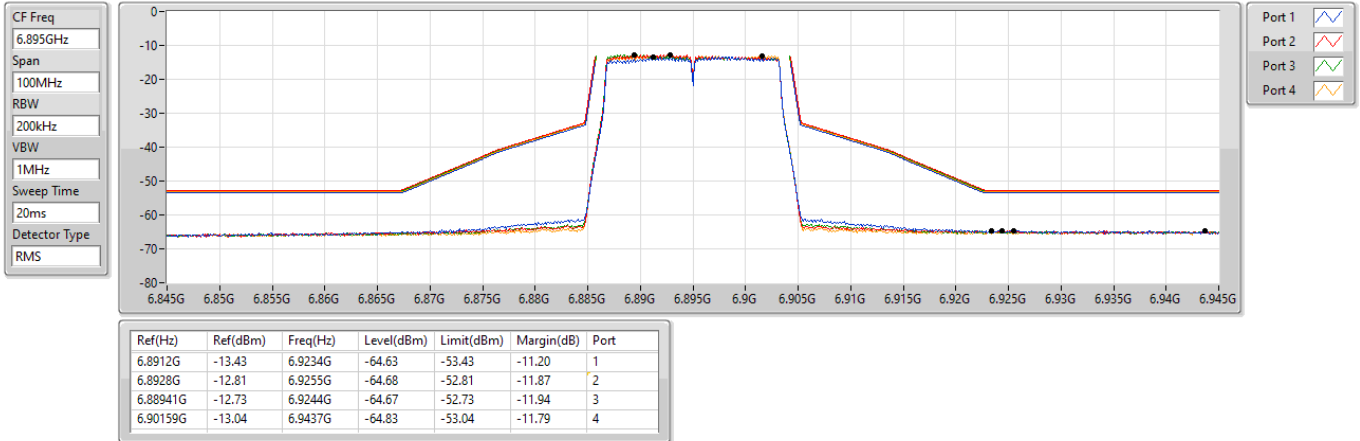

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


7015MHz_TX

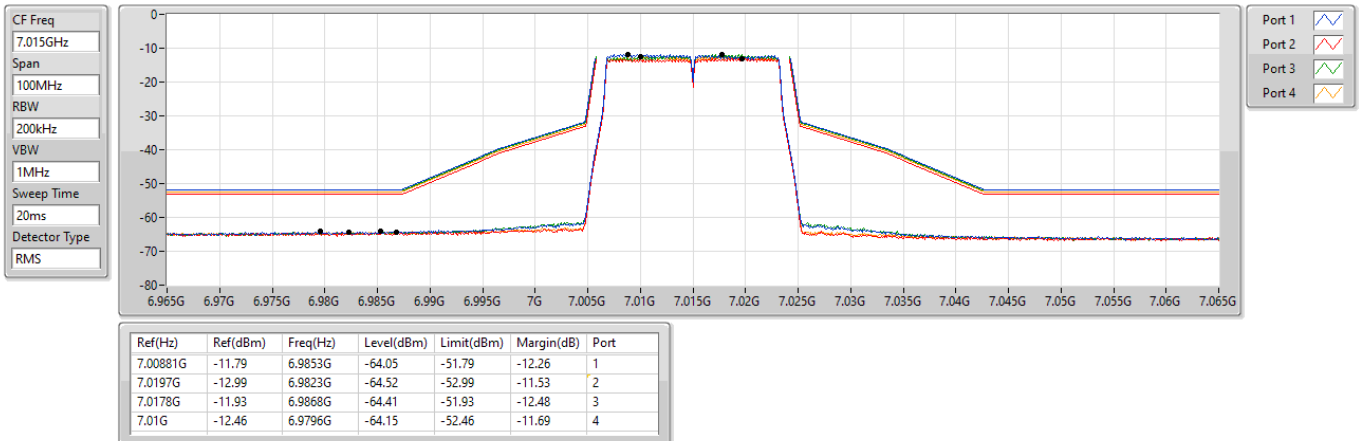

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


7095MHz_TX

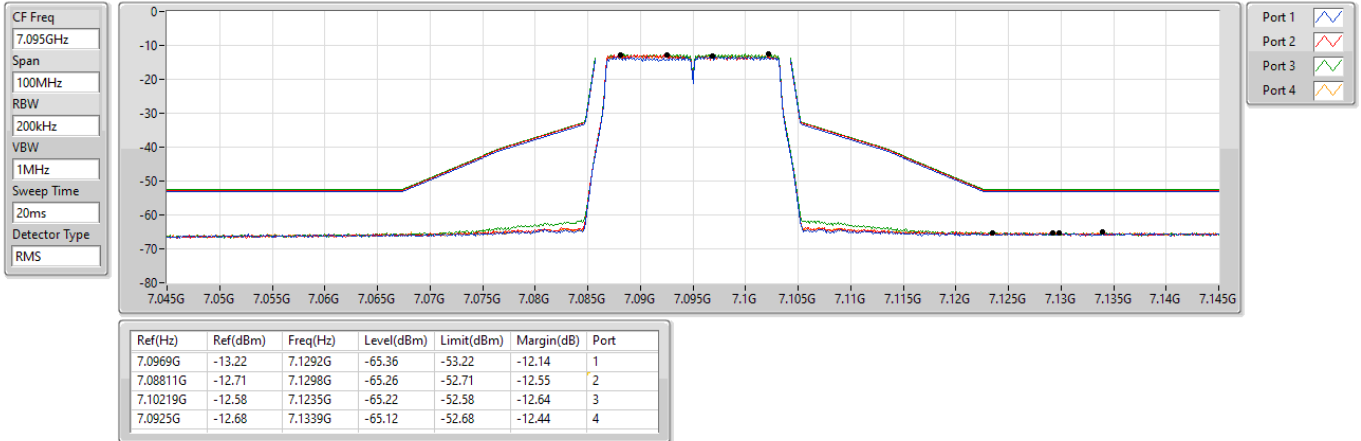

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


5955MHz_TX

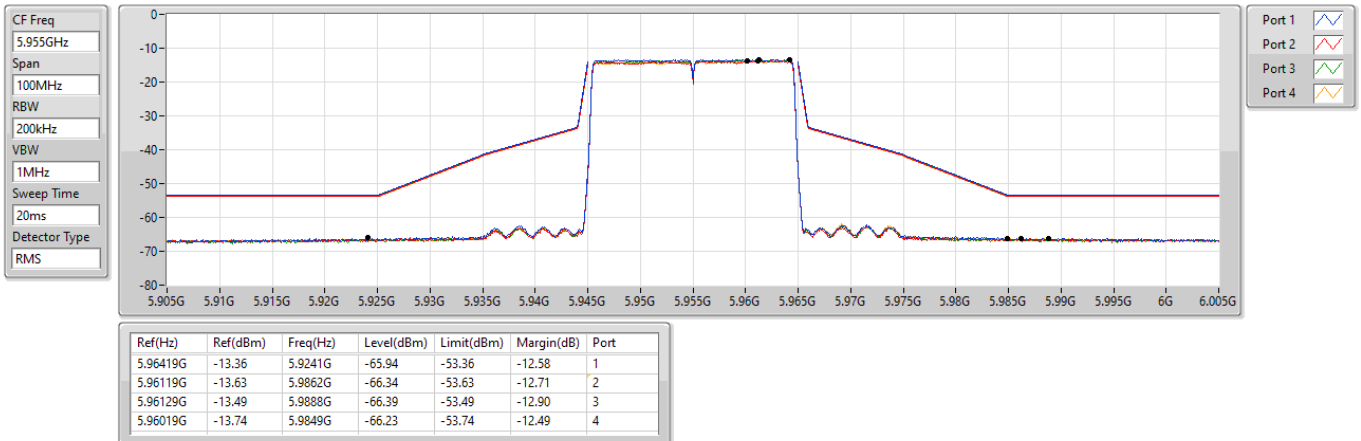

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6175MHz_TX

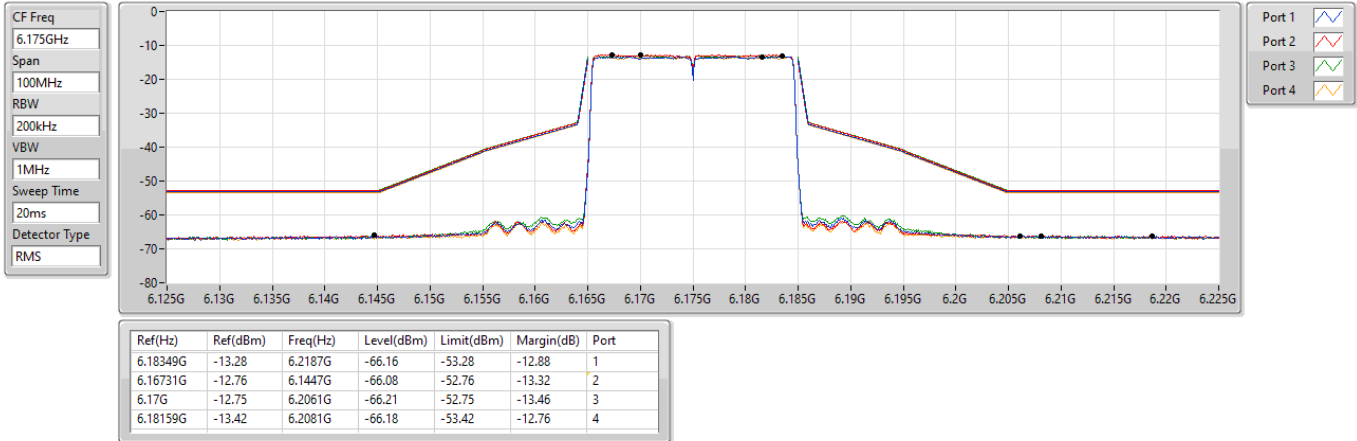

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6415MHz_TX

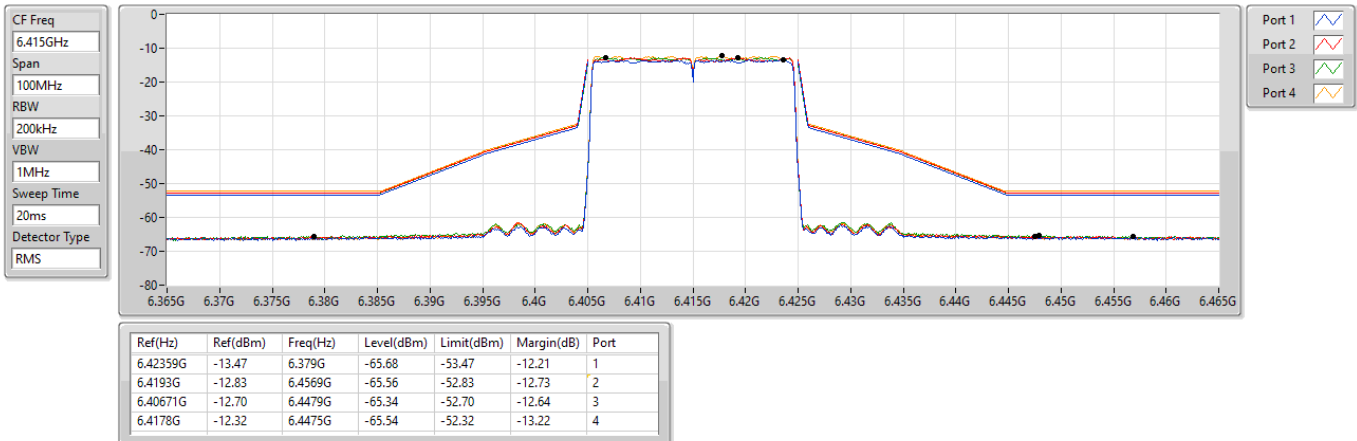

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6435MHz_TX

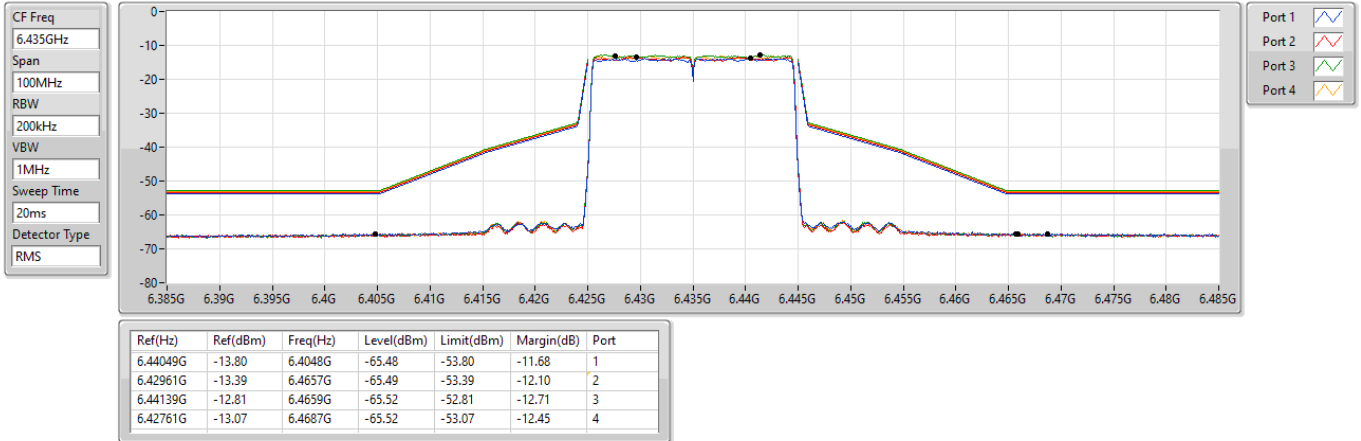

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6475MHz_TX

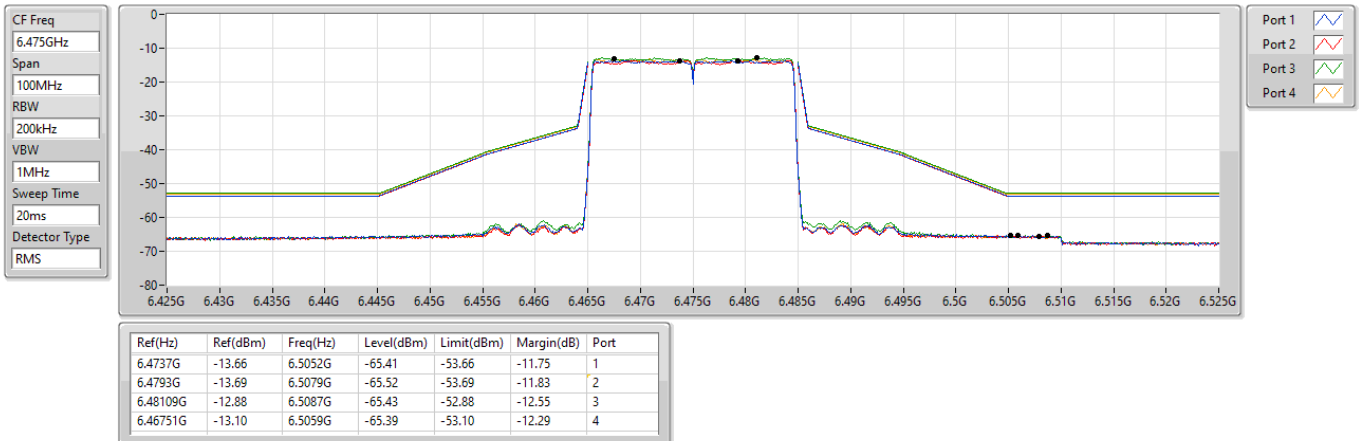

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6515MHz_TX

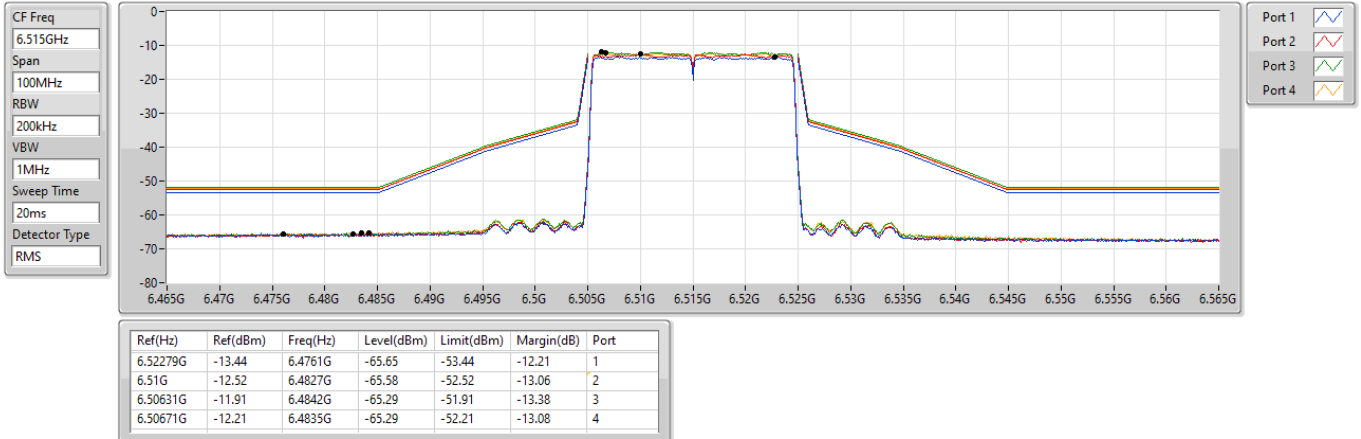

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6535MHz_TX

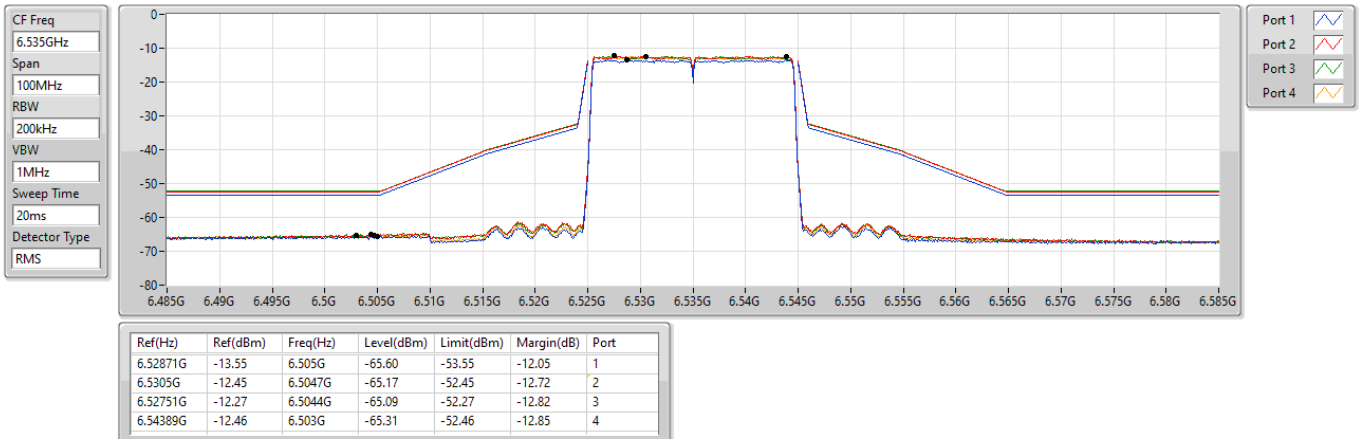

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6715MHz_TX

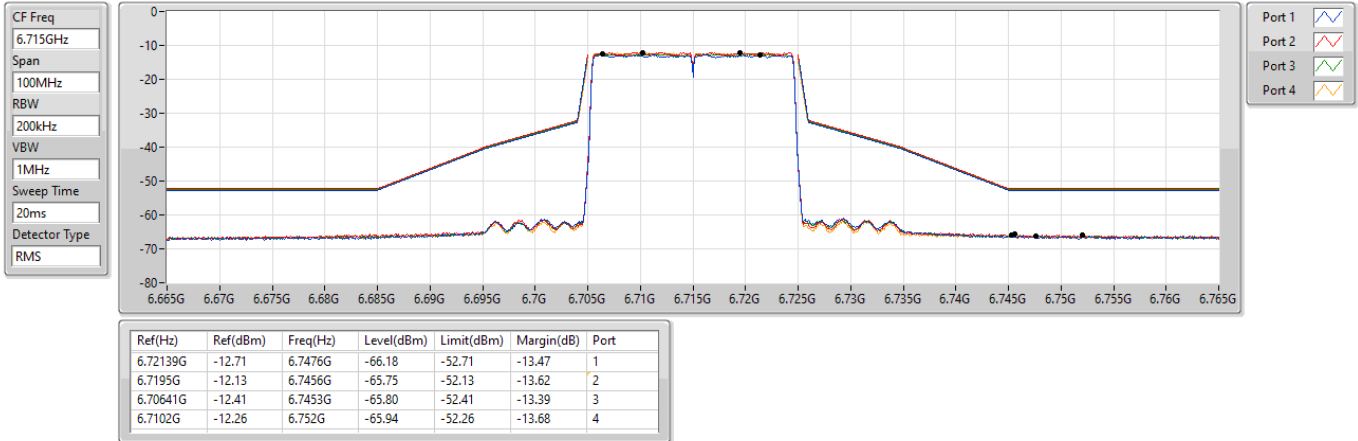

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6855MHz_TX

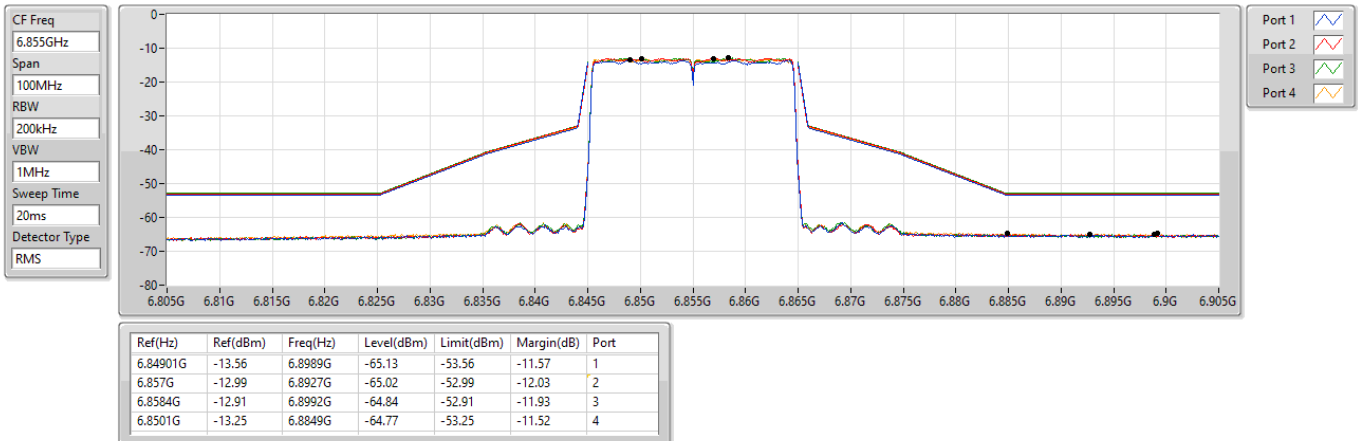

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6875MHz Straddle 6.525-6.875GHz_TX

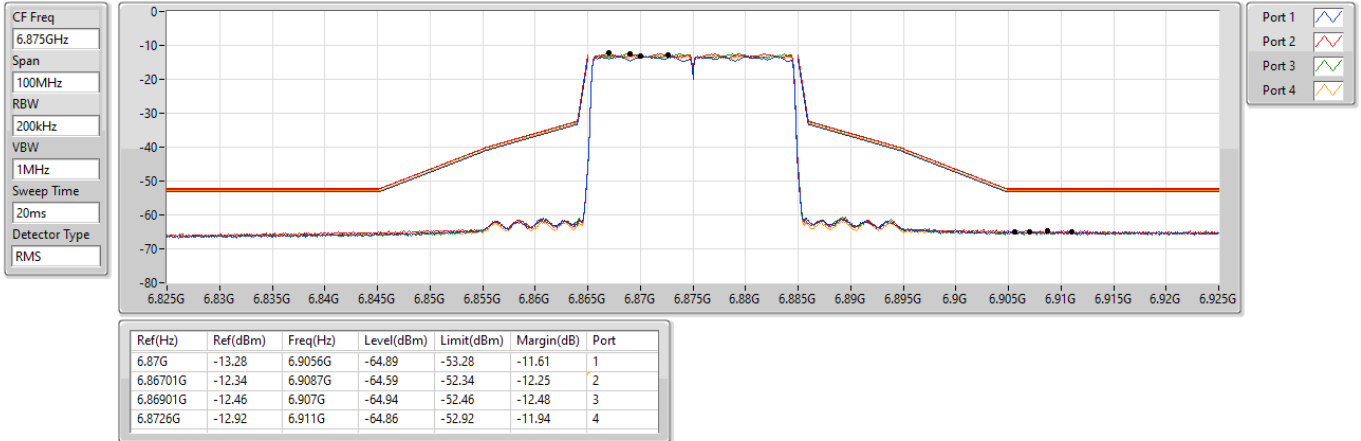

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6895MHz_TX

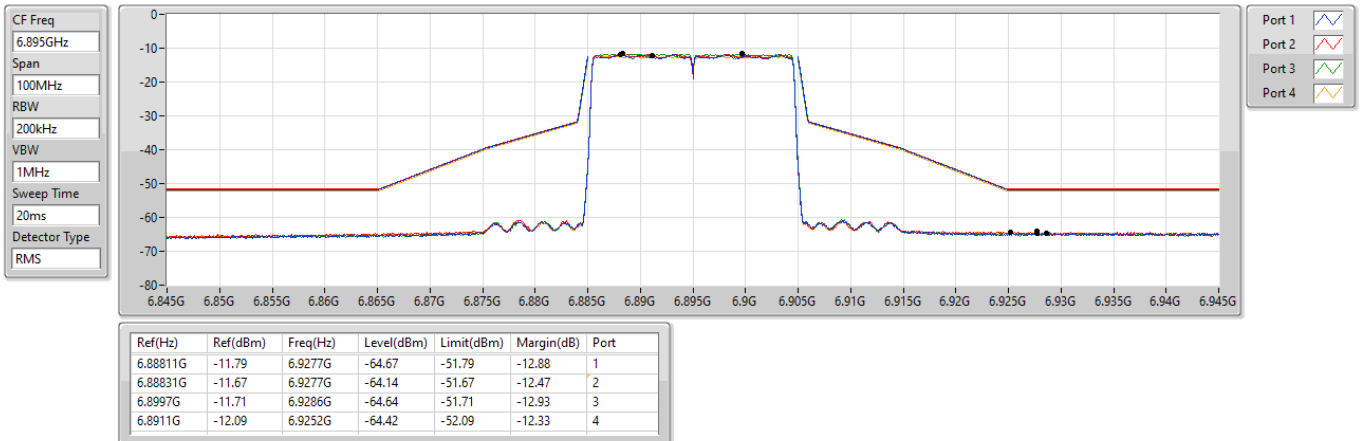

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


7015MHz_TX

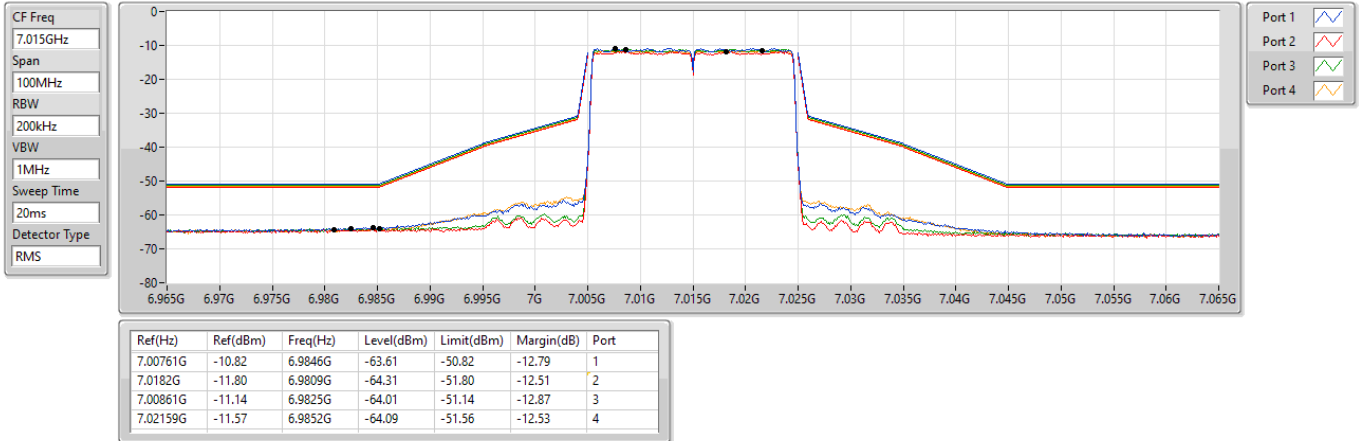

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


7095MHz_TX

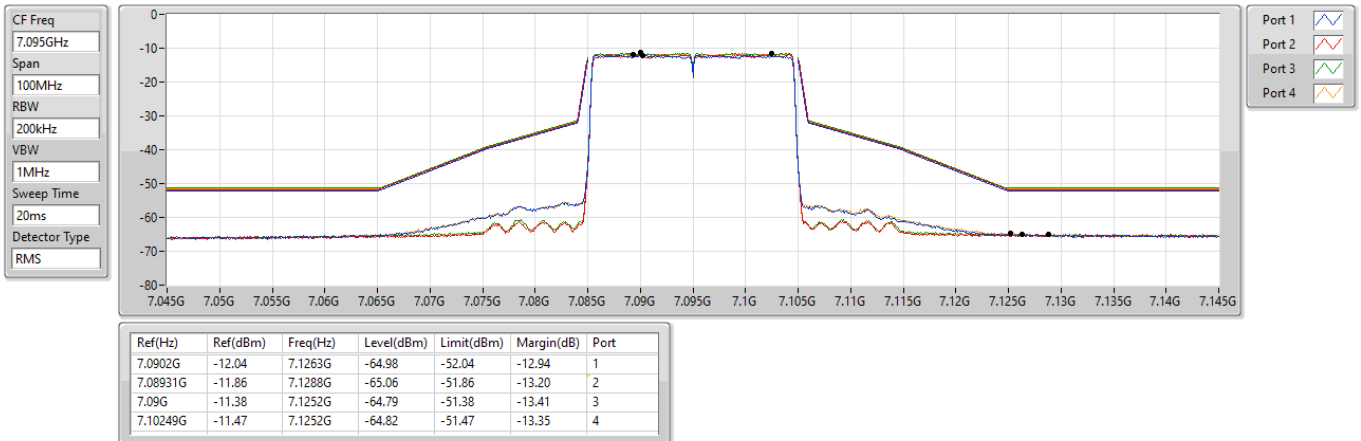

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


5965MHz_TX

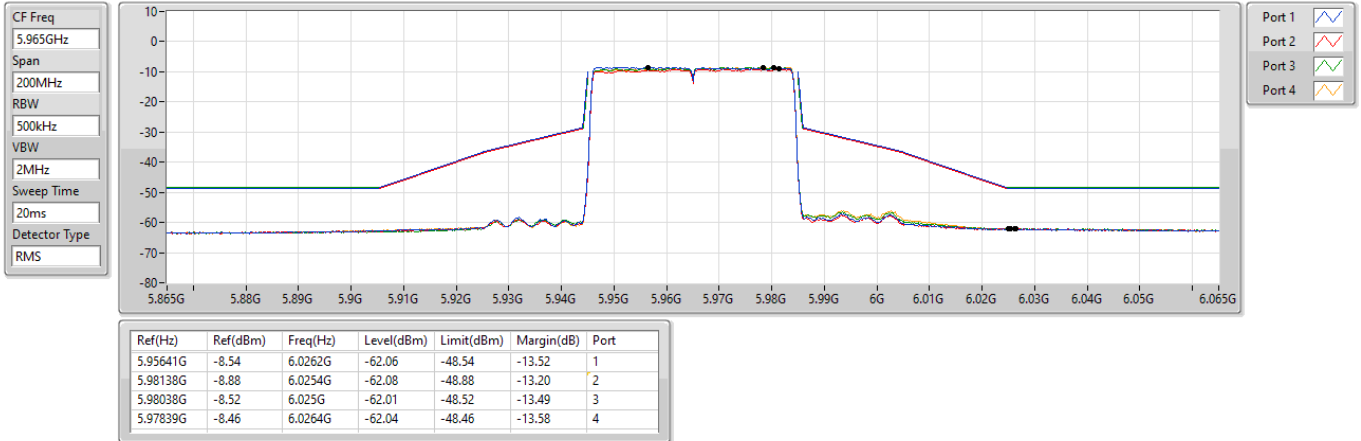

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6165MHz_TX

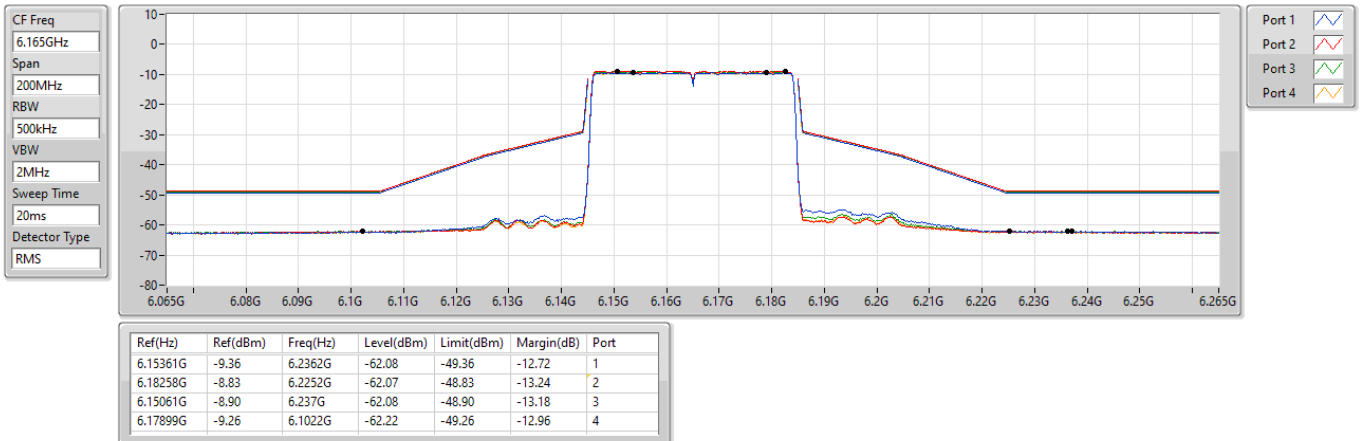

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6405MHz_TX

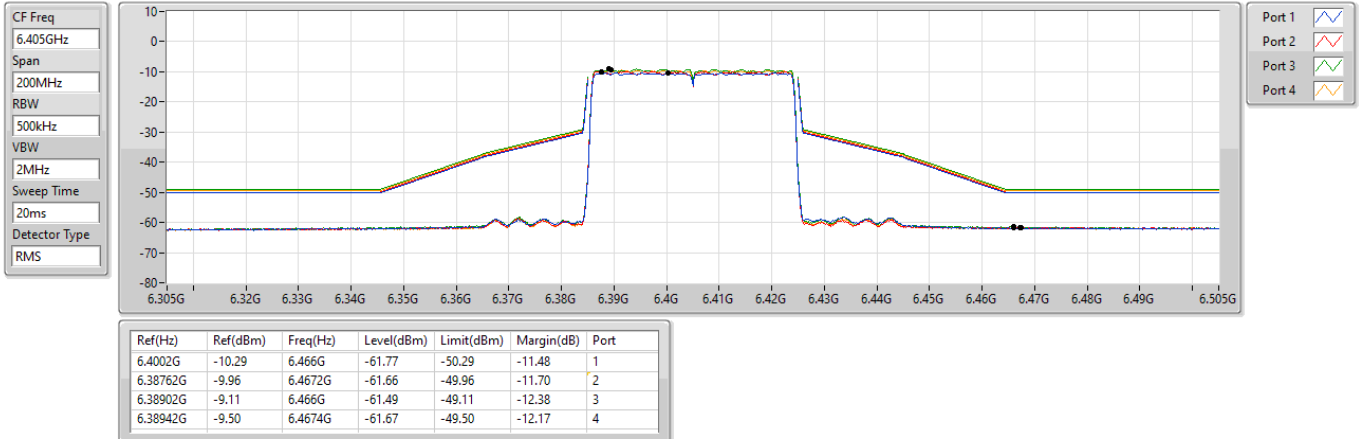

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6445MHz_TX

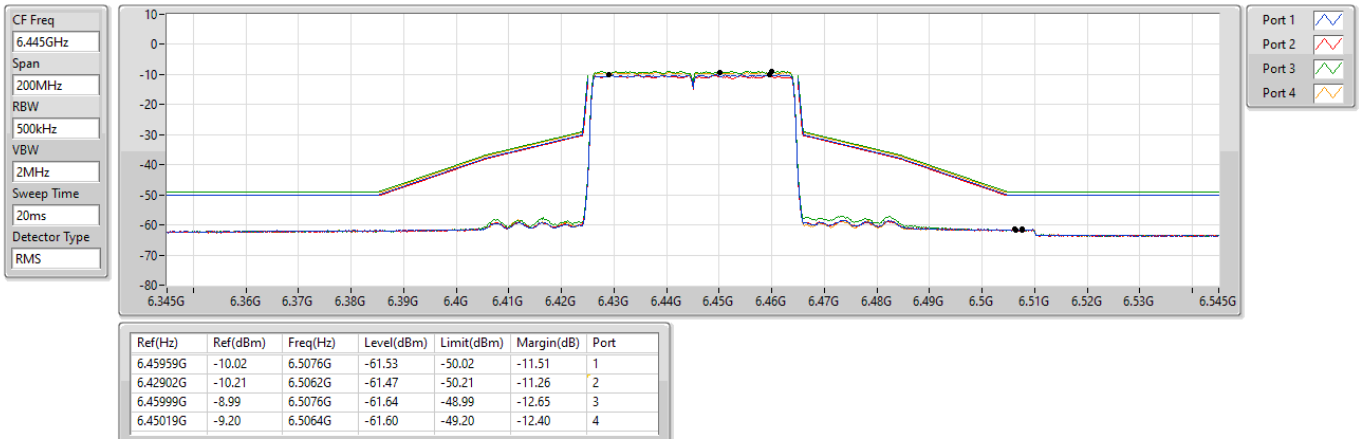

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6485MHz_TX

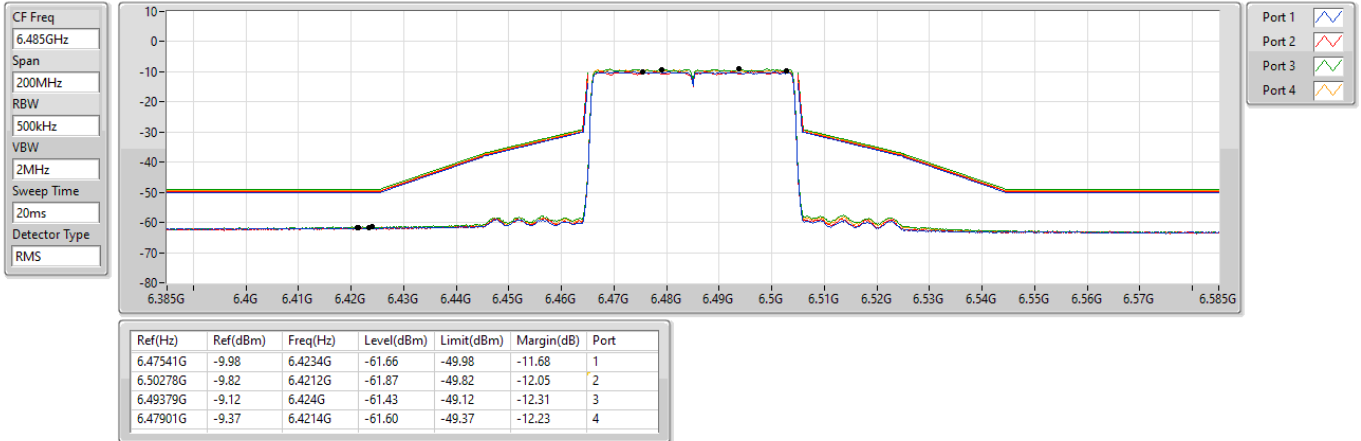

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6525MHz Straddle 6.425-6.525GHz_TX

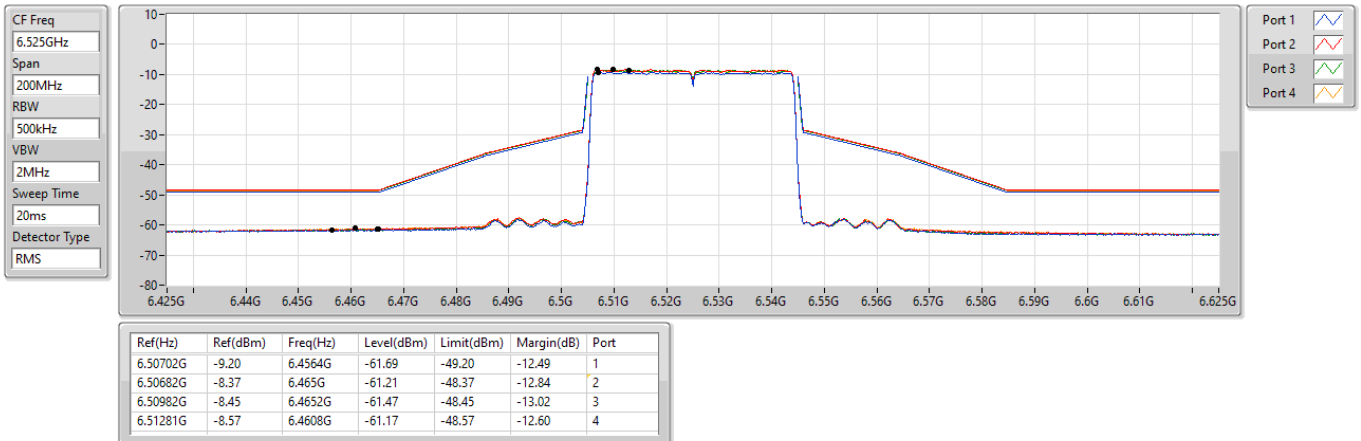

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6565MHz_TX

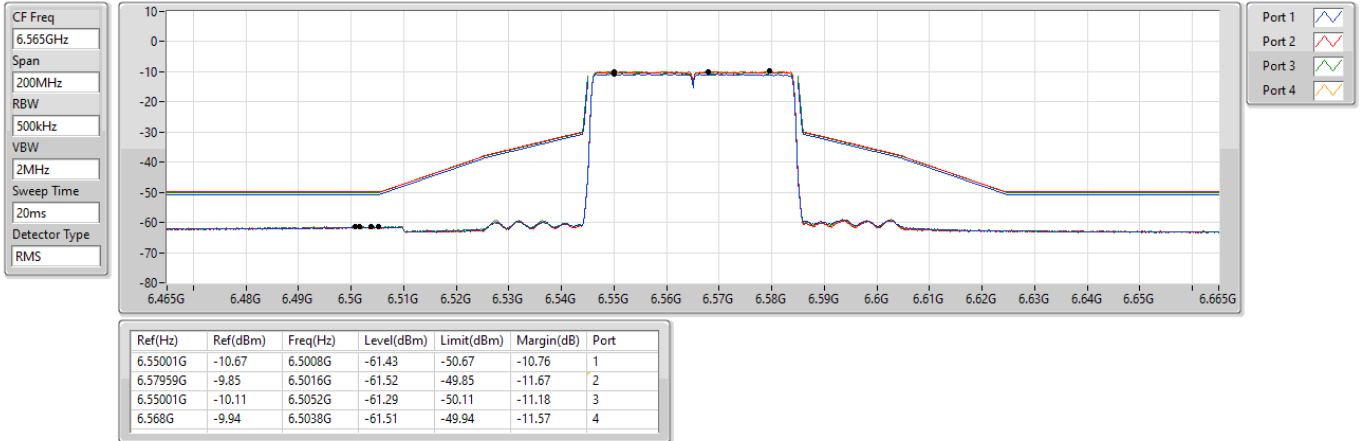

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6725MHz_TX

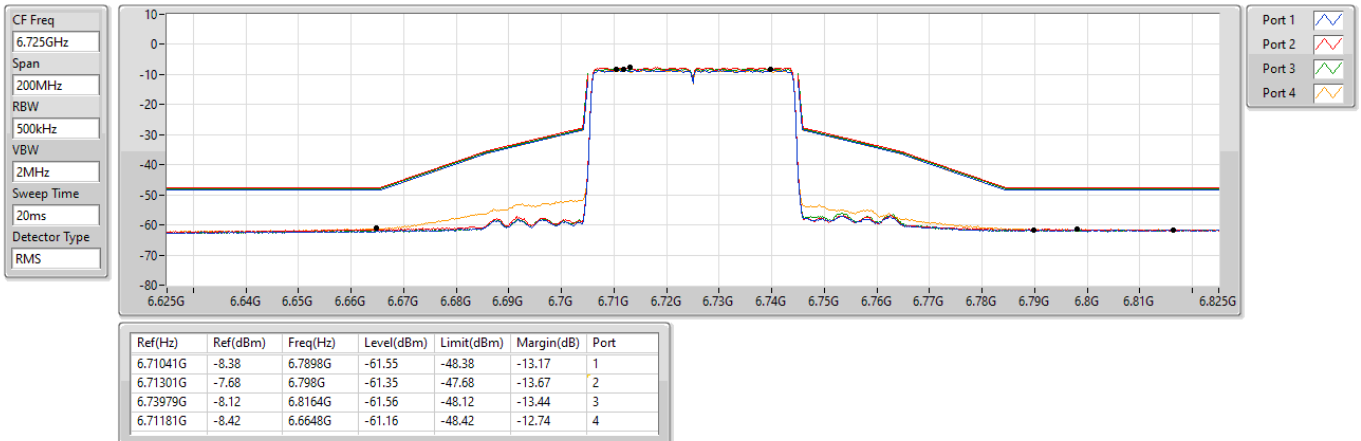

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6845MHz_TX

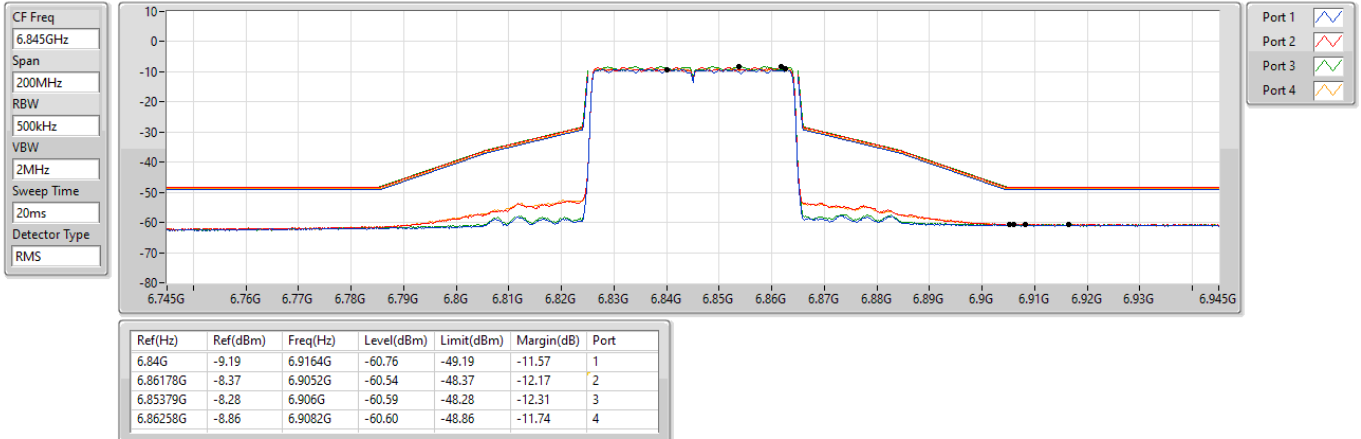

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6885MHz Straddle 6.525-6.875GHz_TX

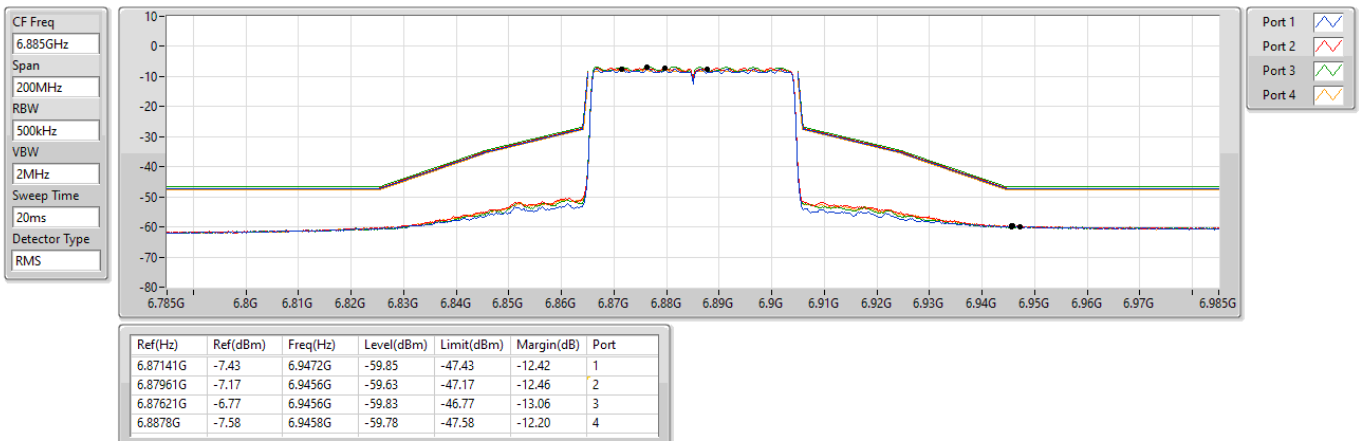

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6925MHz_TX

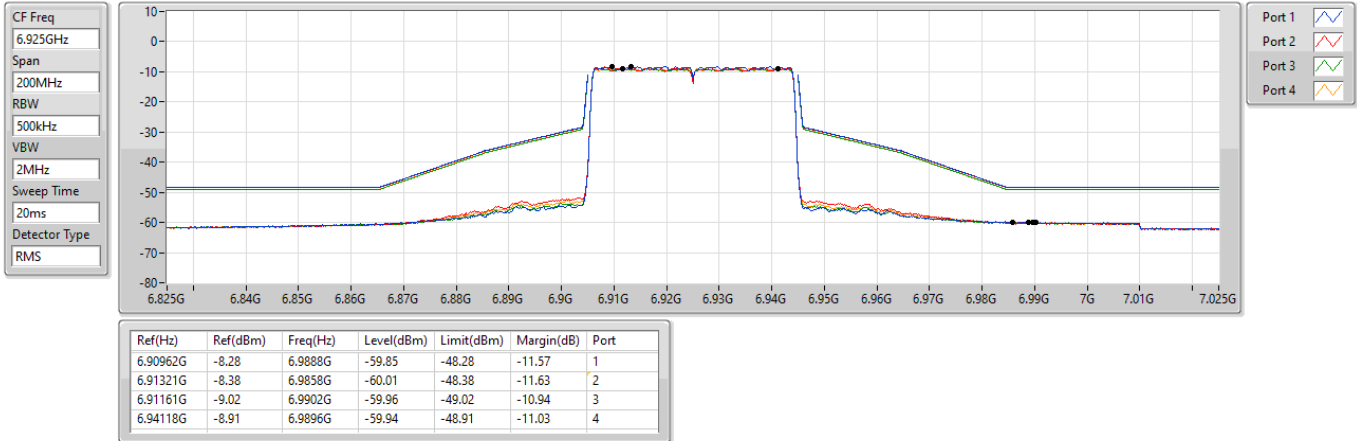

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


7005MHz_TX

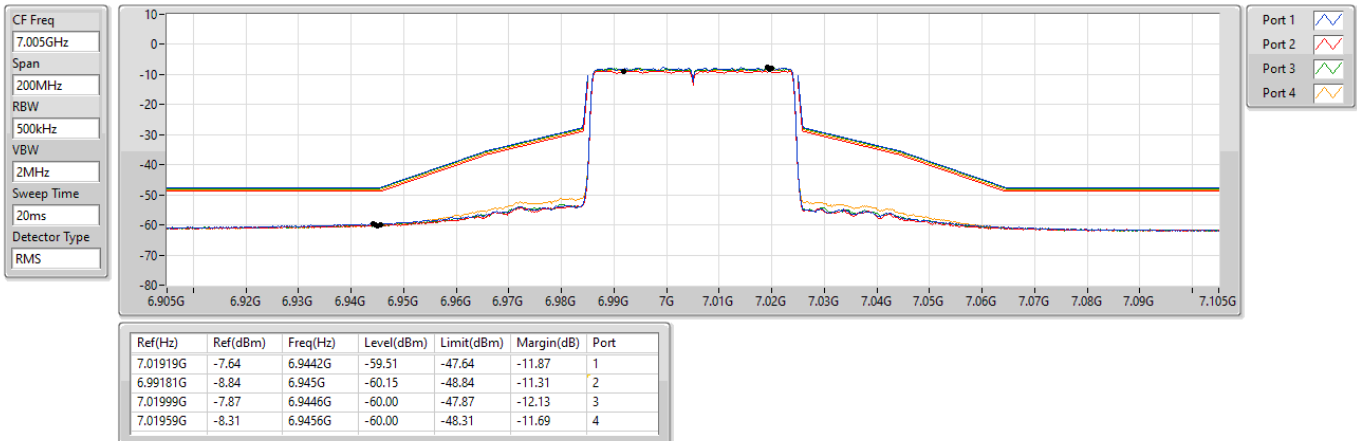

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


7085MHz_TX

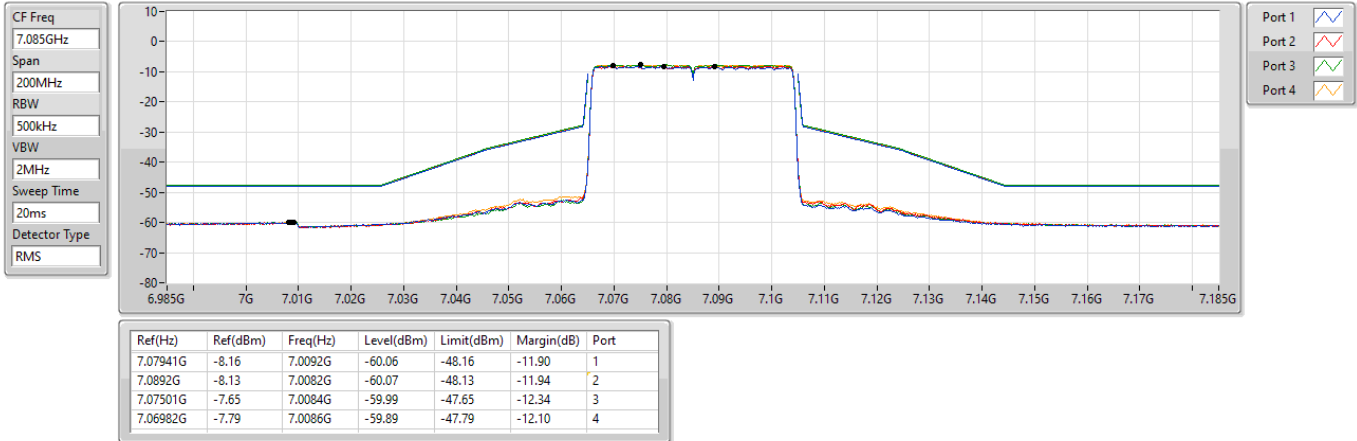

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


5985MHz_TX

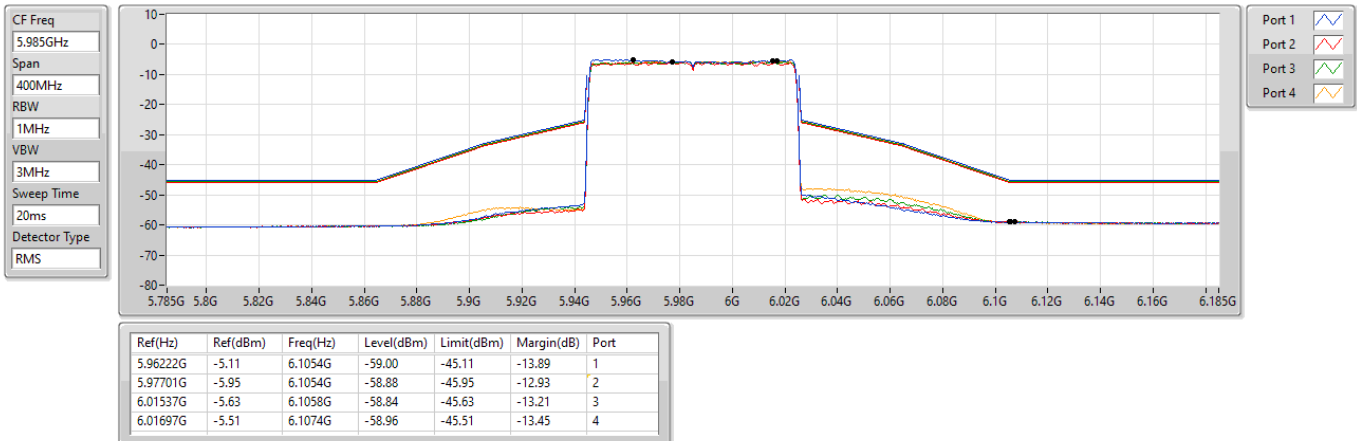

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK

6145MHz_TX

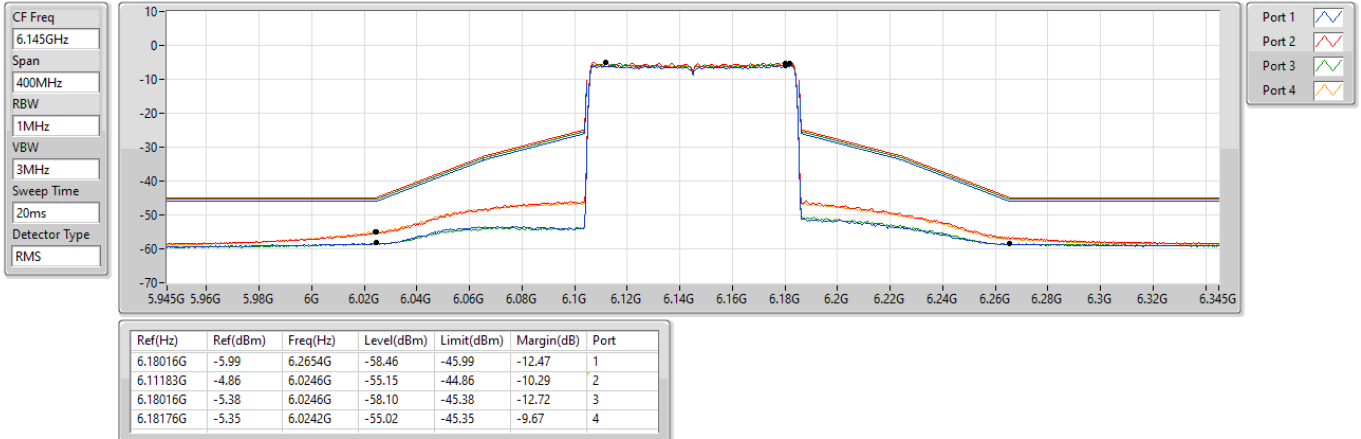

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK

6385MHz_TX

