


6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6465MHz_TX

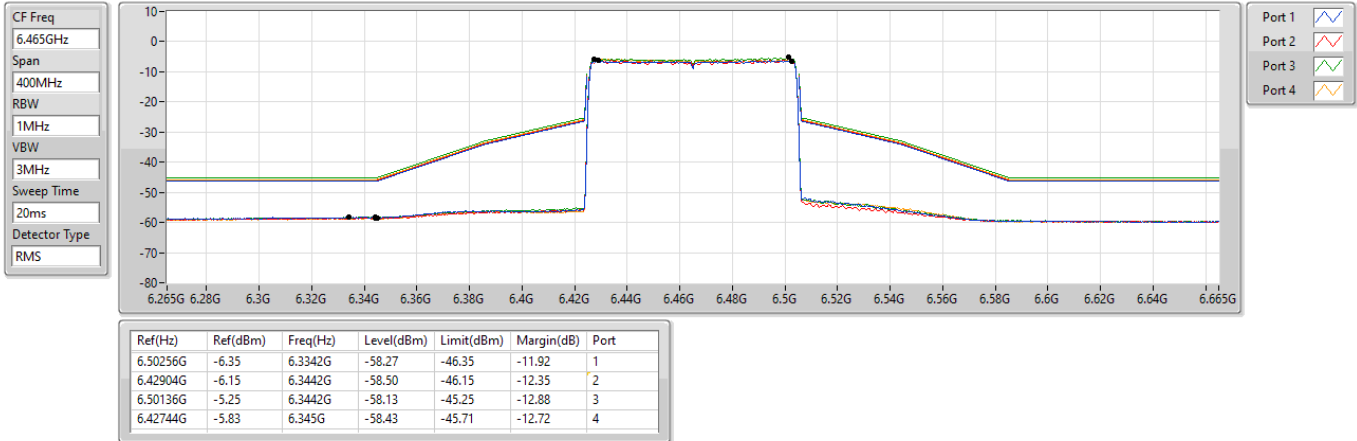

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6545MHz Straddle 6.425-6.525GHz_TX

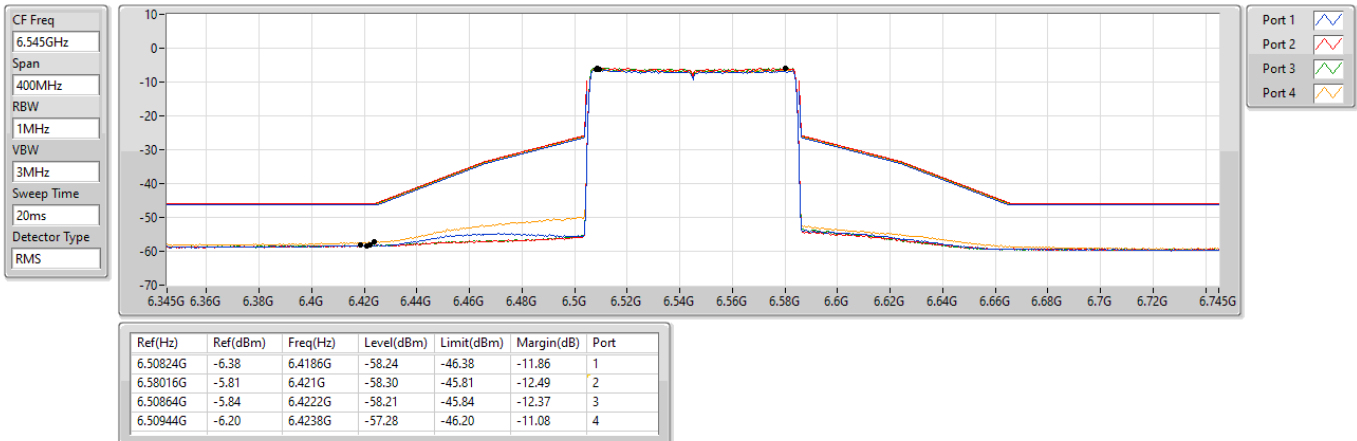

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6625MHz_TX

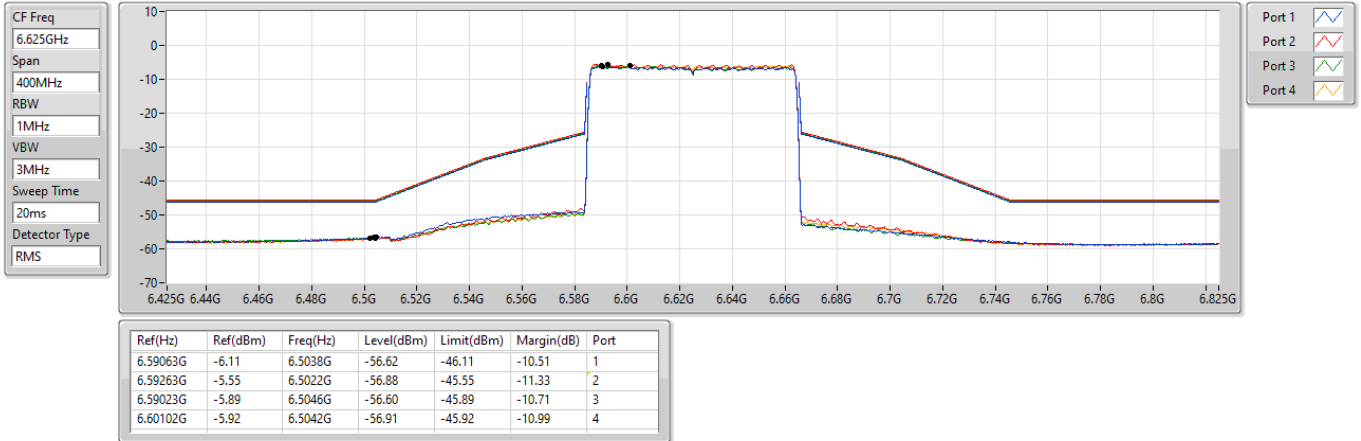

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6705MHz_TX

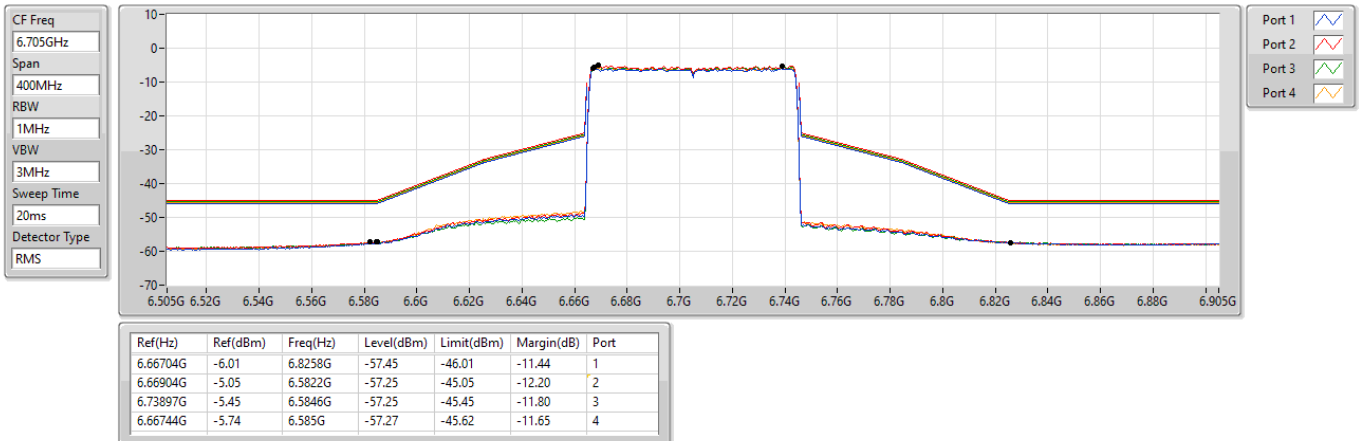

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6785MHz_TX

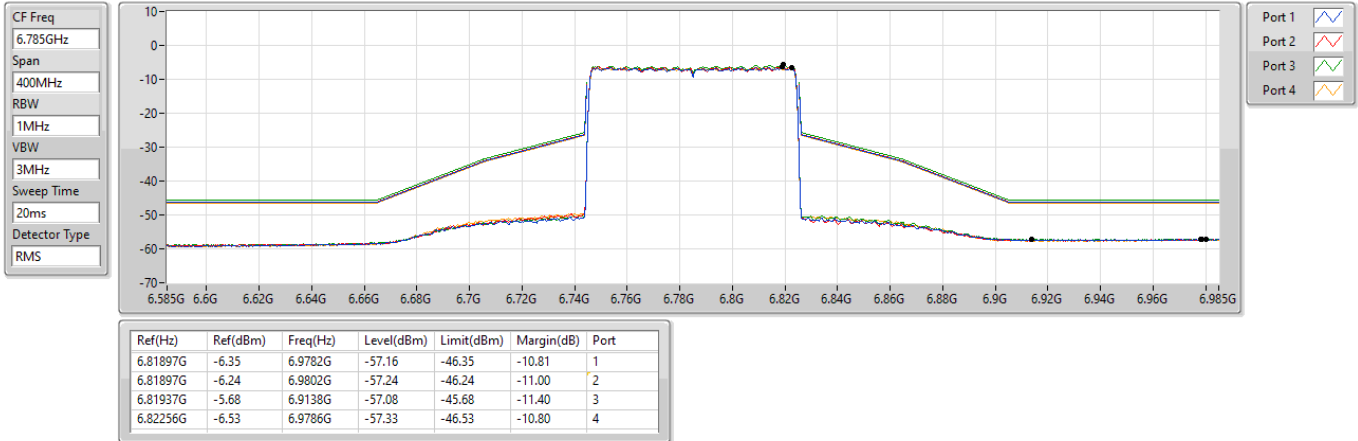

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6865MHz Straddle 6.525-6.875GHz_TX

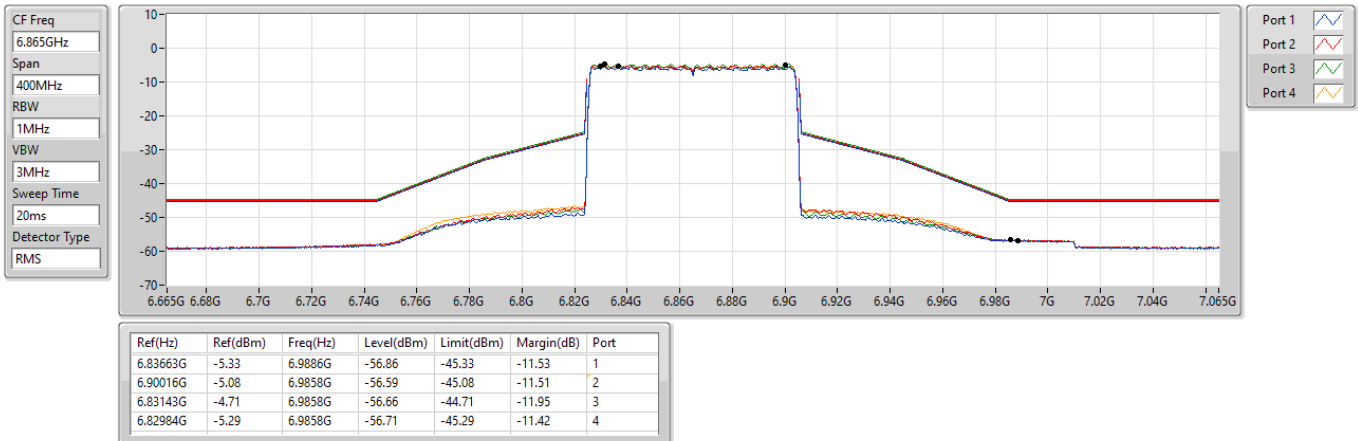

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6945MHz_TX

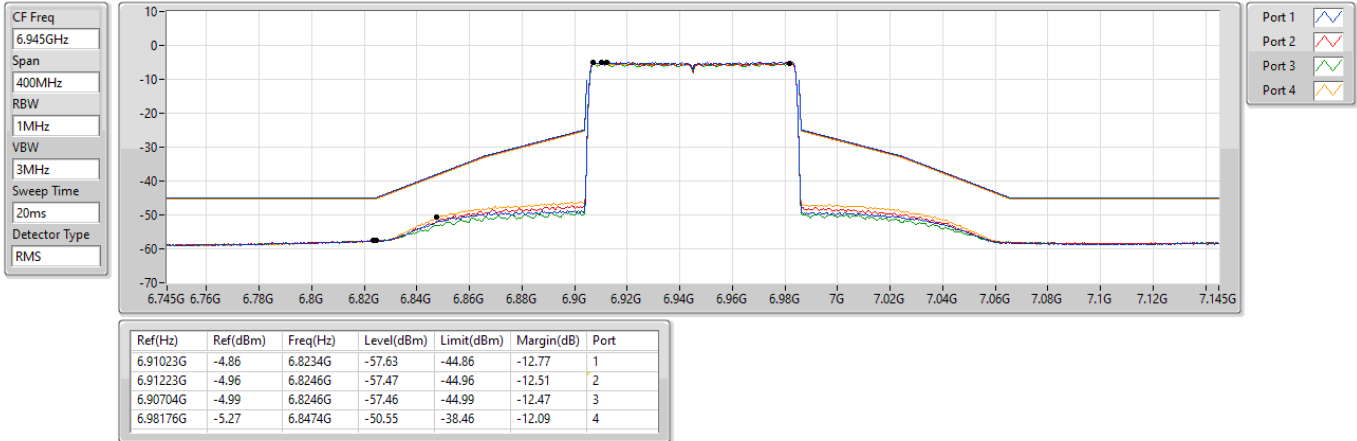

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


7025MHz_TX

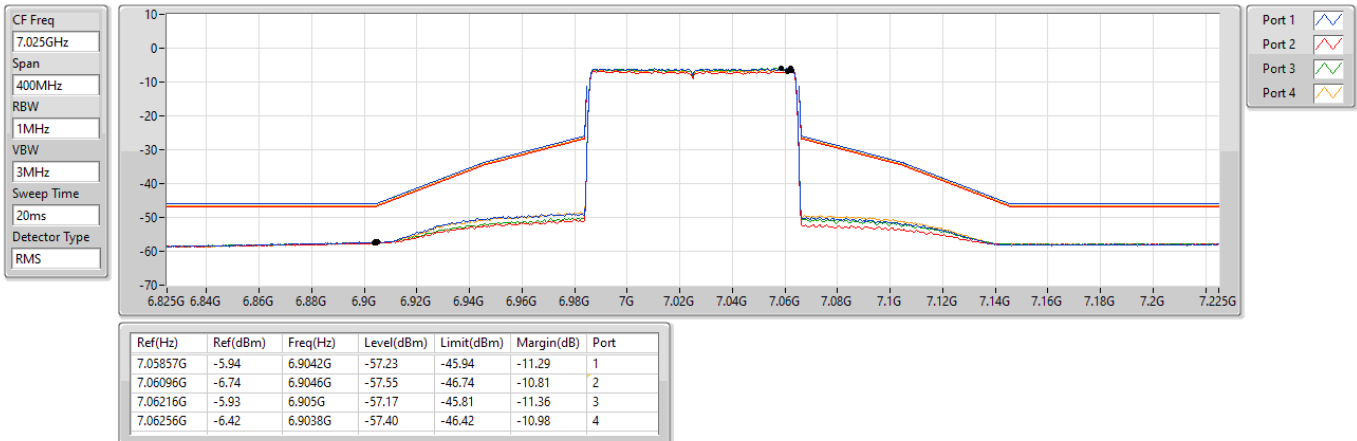

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6025MHz_TX

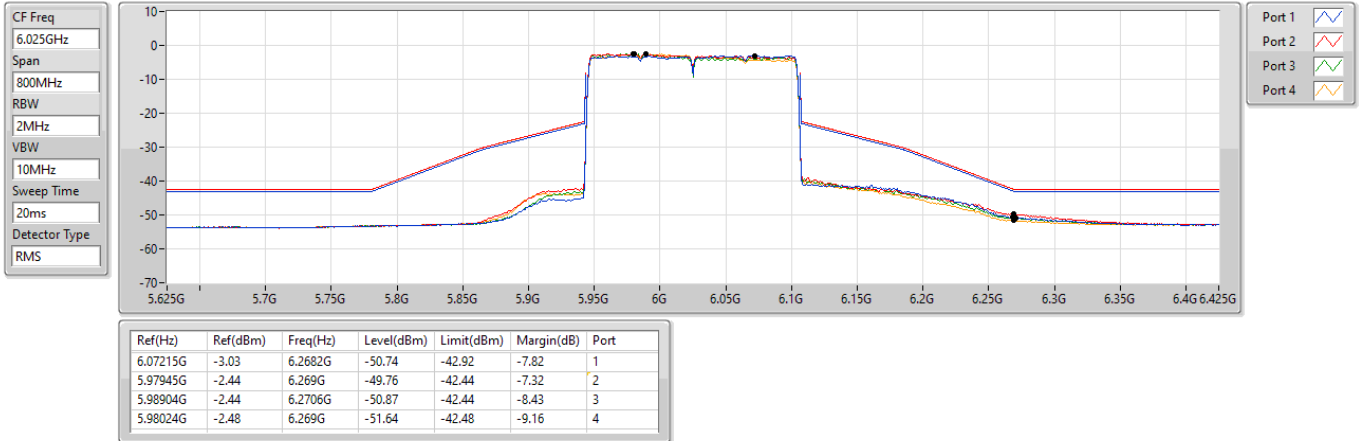

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6185MHz_TX

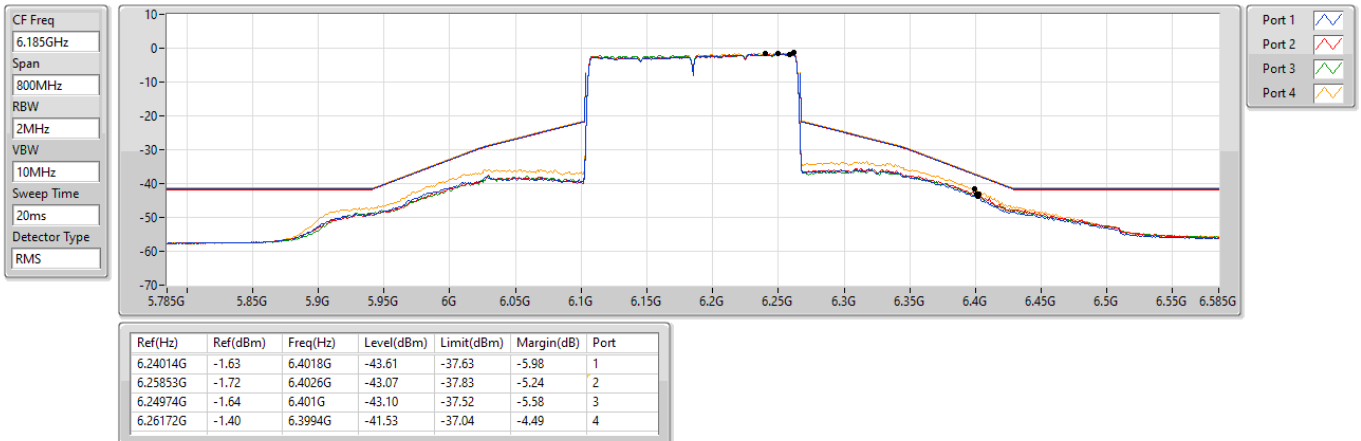

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6345MHz_TX

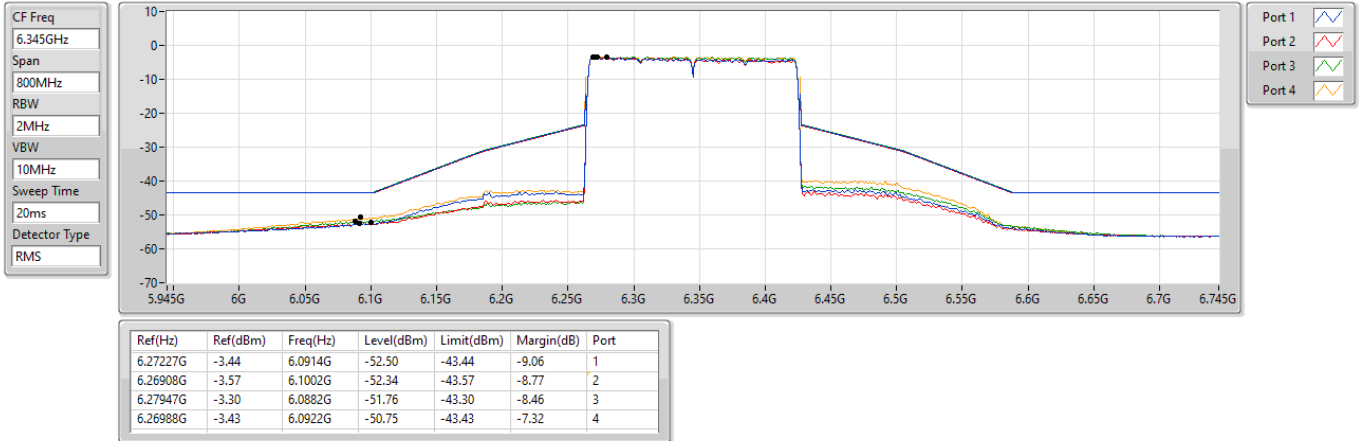

6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6505MHz Straddle 6.425-6.525GHz_TX

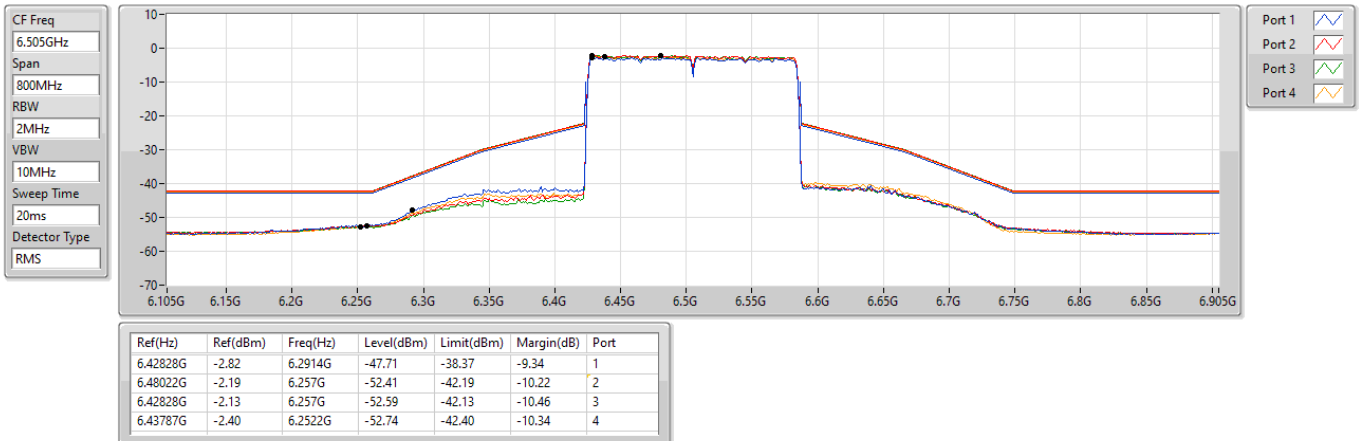

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6665MHz_TX

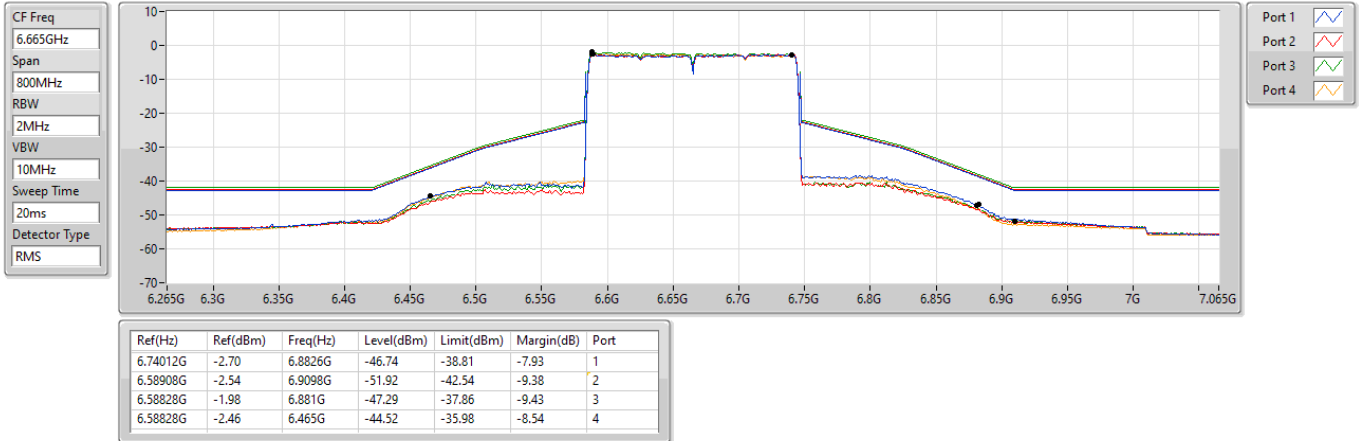

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6825MHz Straddle 6.525-6.875GHz_TX

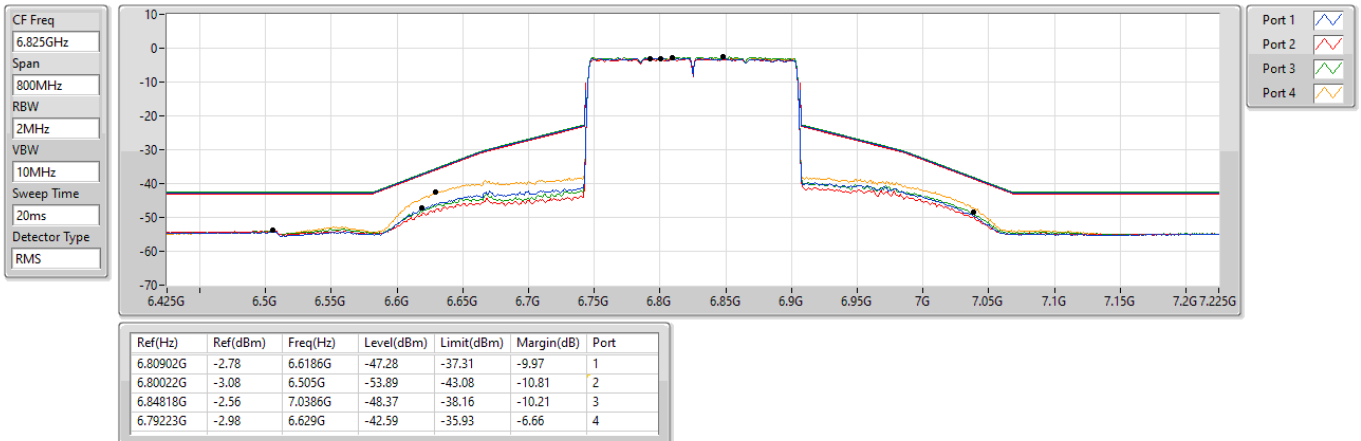

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6985MHz_TX

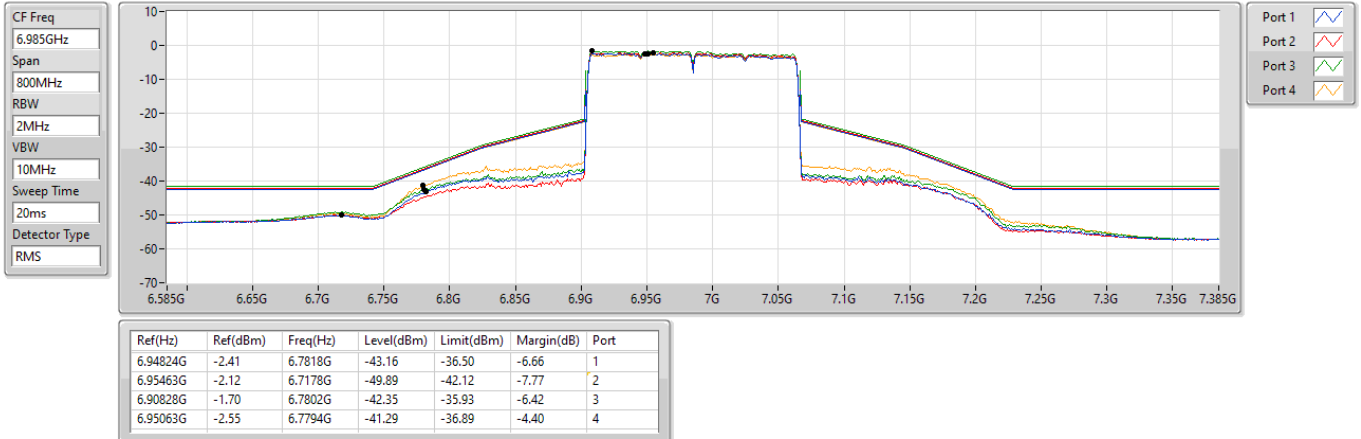

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

MASK


6105MHz_TX

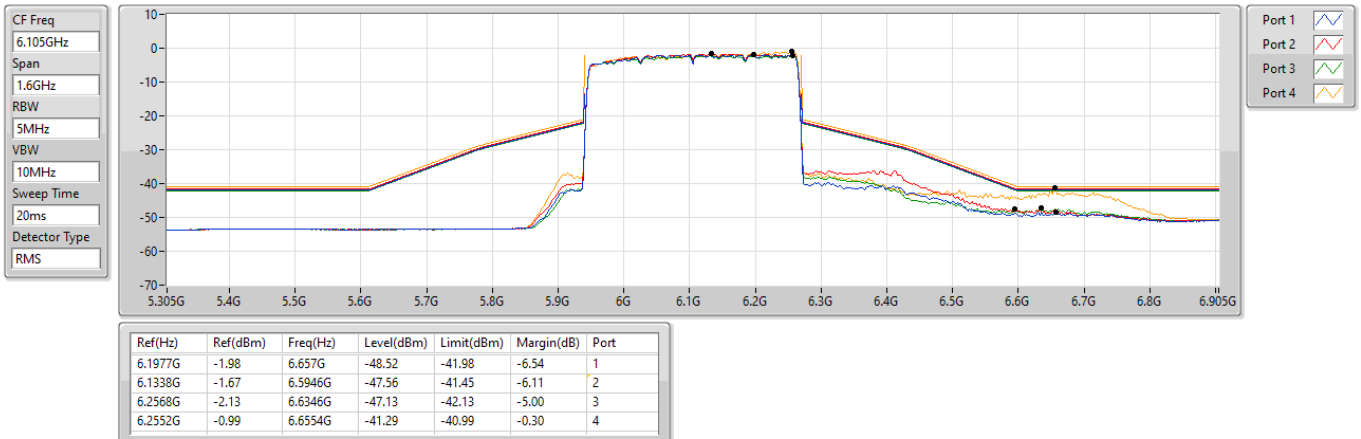

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

MASK


6265MHz_TX

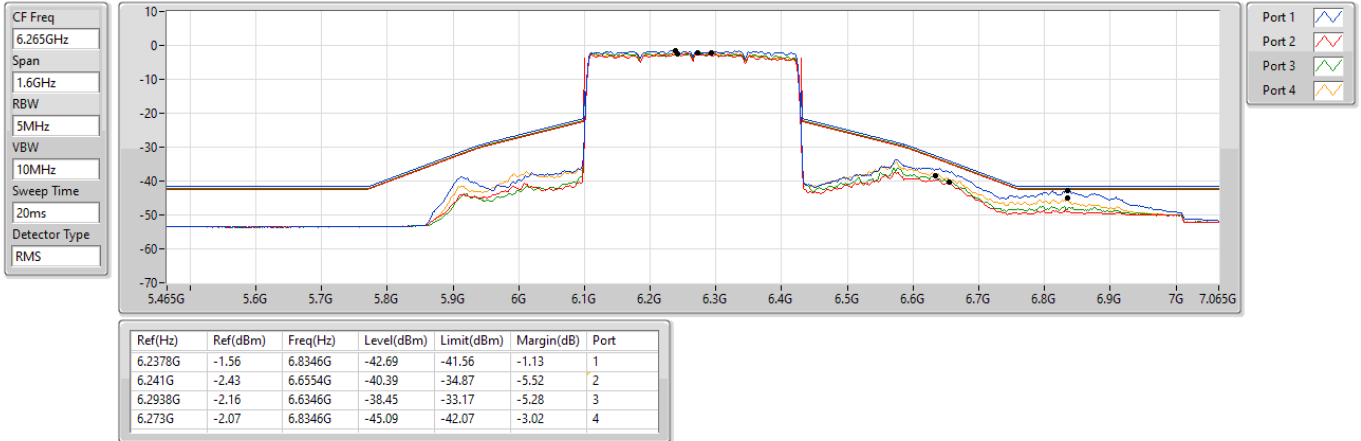

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

MASK


6425MHz Straddle 5.925-6.425GHz_TX

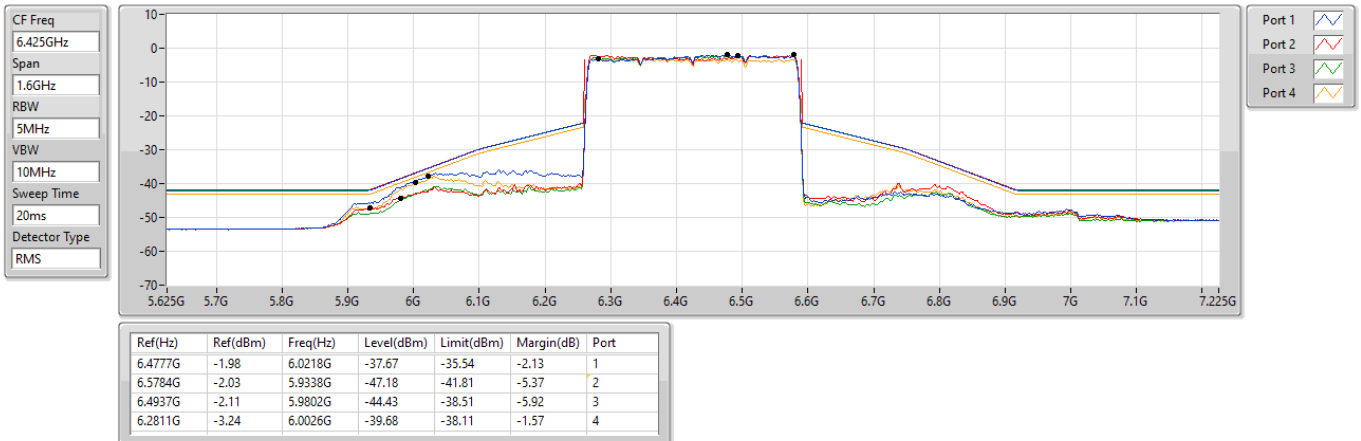

6.425-6.525GHz 802.11be EHT320_Nss1,(MCS0)_4TX

MASK


6585MHz Straddle 6.425-6.525GHz_TX

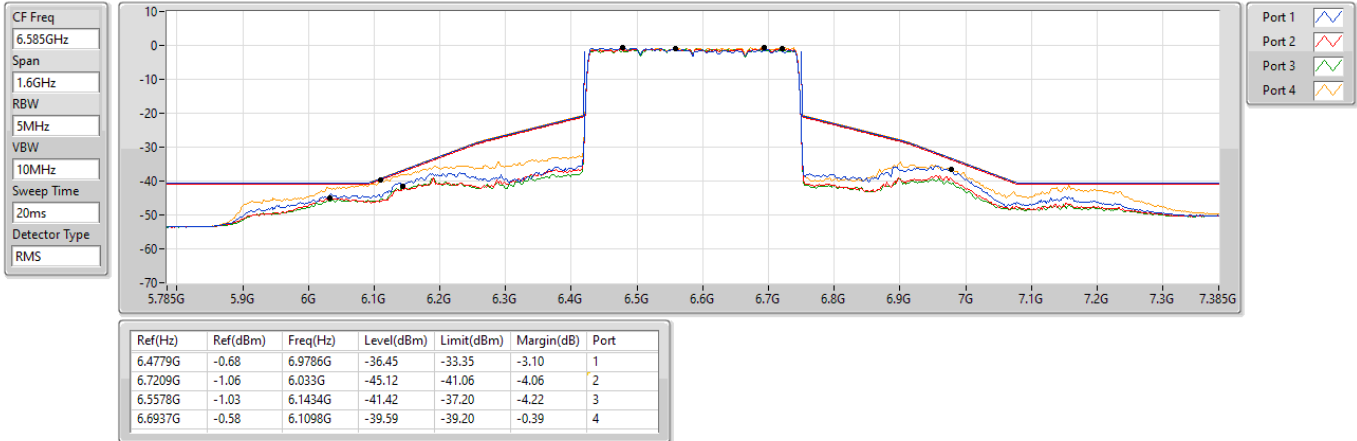

6.525-6.875GHz 802.11be EHT320_Nss1,(MCS0)_4TX

MASK

6745MHz Straddle 6.525-6.875GHz_TX

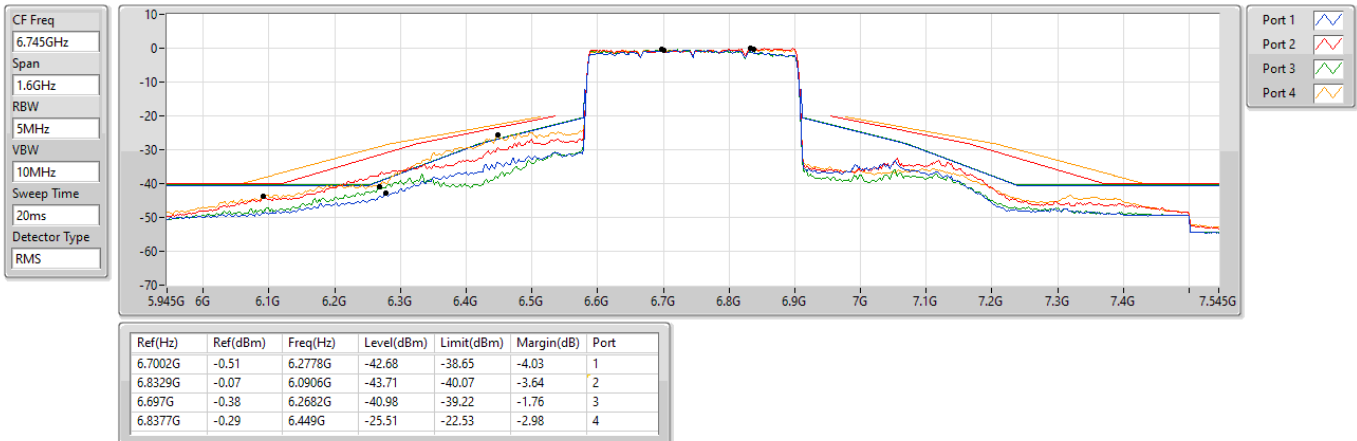




6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

MASK

6905MHz Straddle 6.525-6.875GHz_TX

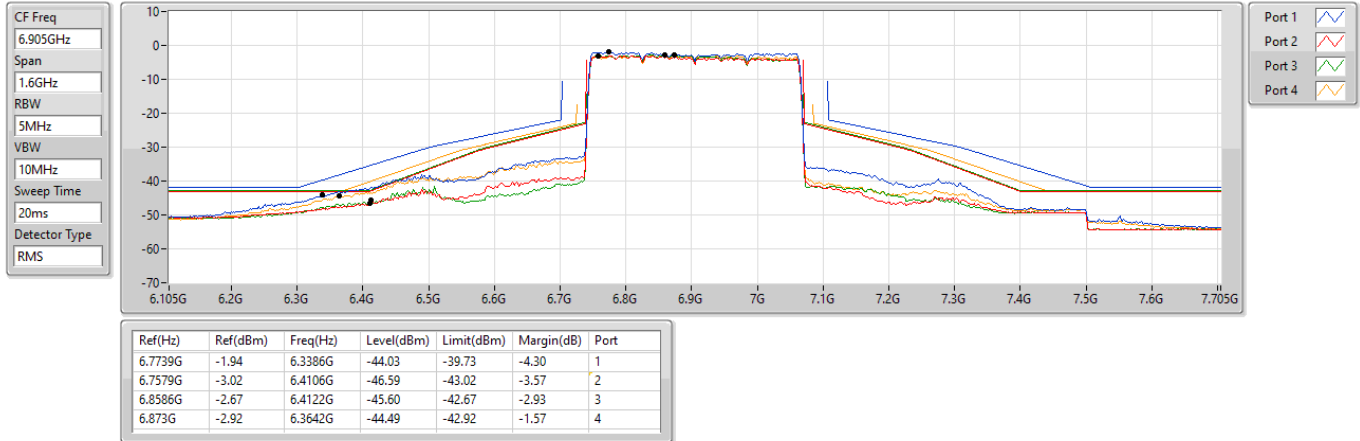



Frequency: 6475 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	-3.31	-3.75	-3.34	-3.33
T20°C Vmin	-3.30	-3.60	-3.20	-3.72
T40°C Vnom	-4.31	-4.09	-4.30	-4.40
T30°C Vnom	-3.73	-3.93	-3.20	-3.07
T20°C Vnom	-3.32	-3.09	-3.53	-3.46
T10°C Vnom	3.33	3.42	3.46	3.25
T0°C Vnom	9.39	9.79	9.91	9.44
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 0	

Frequency: 7015 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	-2.49	-2.74	-2.77	-2.85
T20°C Vmin	-3.11	-2.98	-2.92	-3.22
T40°C Vnom	-4.16	-3.96	-3.51	-4.04
T30°C Vnom	-3.04	-3.67	-3.17	-3.33
T20°C Vnom	-2.77	-2.91	-3.08	-2.92
T10°C Vnom	3.33	3.14	3.12	2.96
T0°C Vnom	8.44	9.02	8.52	8.80
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 0	


Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Antenna gain With path Loss (dBi)	Adjusted Power (dBm)	Detection limit (dBm)	EUT Tx Status
be EHT20	5	6195	6194	-65.25	3.84	-69.09	-62	Ceased
				-68.25	3.84	-72.09	-62	Minimal
				-79.25	3.84	-83.09	-62	Normal
	6	6475	6474	-64.35	3.91	-68.26	-62	Ceased
				-68.35	3.91	-72.26	-62	Minimal
				-78.35	3.91	-82.26	-62	Normal
	7	6695	6694	-64.42	3.2	-67.62	-62	Ceased
				-67.42	3.2	-70.62	-62	Minimal
				-78.42	3.2	-81.62	-62	Normal
	8	6995	6994	-63.6	3.15	-66.75	-62	Ceased
				-67.6	3.15	-70.75	-62	Minimal
				-77.6	3.15	-80.75	-62	Normal


Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Antenna gain with path Loss (dBi)	Adjusted Power (dBm)	Detection limit (dBm)	EUT Tx Status
be EHT320	5	6105	5950	-64.39	3.84	-68.23	-62	Ceased
				-68.39	3.84	-72.23	-62	Minimal
				-79.39	3.84	-83.23	-62	Normal
	5 / 6 / 7	6425	6580	-64.29	3.2	-67.49	-62	Ceased
				-67.29	3.2	-70.49	-62	Minimal
				-78.29	3.2	-81.49	-62	Normal
	7 / 8	6905	6900	-64.27	3.15	-67.42	-62	Ceased
				-67.97	3.15	-71.12	-62	Minimal
				-78.97	3.15	-82.12	-62	Normal

Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Adjusted Power (dBm)	1	2	3	4	5	6	7	8	9	10	Detection Probability (%)	Limit (%)
be EHT20	5	6195	6194	-65.25	-69.09	V	V	V	V	V	V	V	V	V	V	100	90
	6	6475	6474	-64.35	-68.26	V	V	V	X	V	V	V	V	V	V	90	90
	7	6695	6694	-64.42	-67.62	V	V	V	V	V	V	V	X	V	V	90	90
	8	6995	6994	-63.6	-66.75	V	V	V	V	X	V	V	V	V	V	90	90


Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Adjusted Power (dBm)	1	2	3	4	5	6	7	8	9	10	Detection Probability (%)	Limit (%)
be EHT320	5	6105	5950	-64.39	-68.23	V	V	V	V	V	V	V	V	V	V	100	90
			6100	-64.39	-68.23	V	V	V	V	X	V	V	V	V	V	90	90
			6260	-65.3	-69.14	V	V	V	V	V	V	V	V	V	V	100	90
	5 / 6 / 7	6425	6270	-65.42	-68.62	V	V	V	V	V	V	V	V	V	V	100	90
			6420	-64.36	-67.56	V	V	X	V	V	V	V	V	V	V	90	90
			6580	-64.29	-67.49	V	V	V	V	V	X	V	V	V	V	90	90
	7 / 8	6905	6750	-65.23	-68.38	V	V	V	V	V	V	V	V	V	V	100	90
			6900	-64.27	-67.42	V	V	V	V	V	V	X	V	V	V	90	90
			7060	-64.43	-67.58	V	V	V	V	V	V	V	V	X	V	90	90

Test plot of Incumbent signal

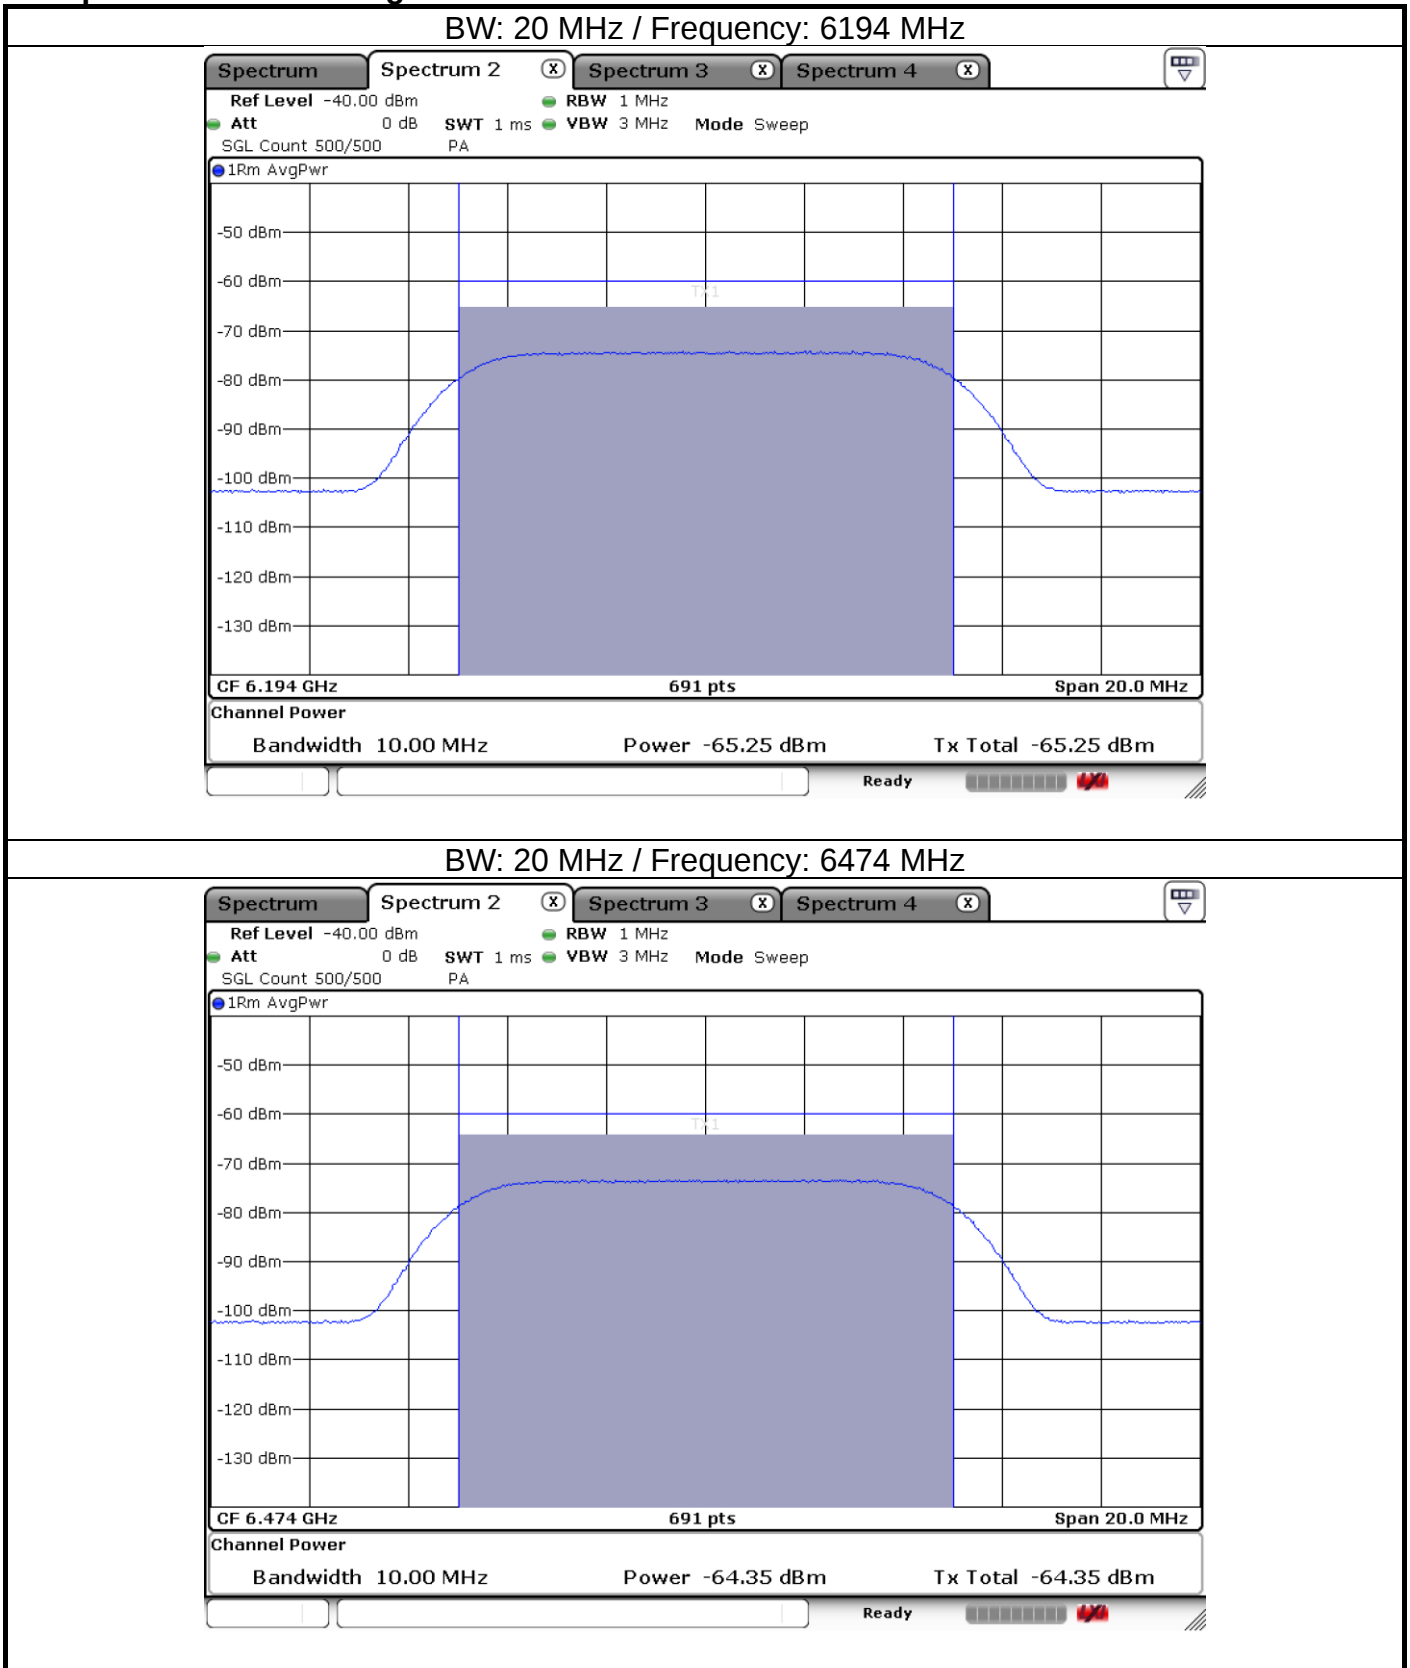


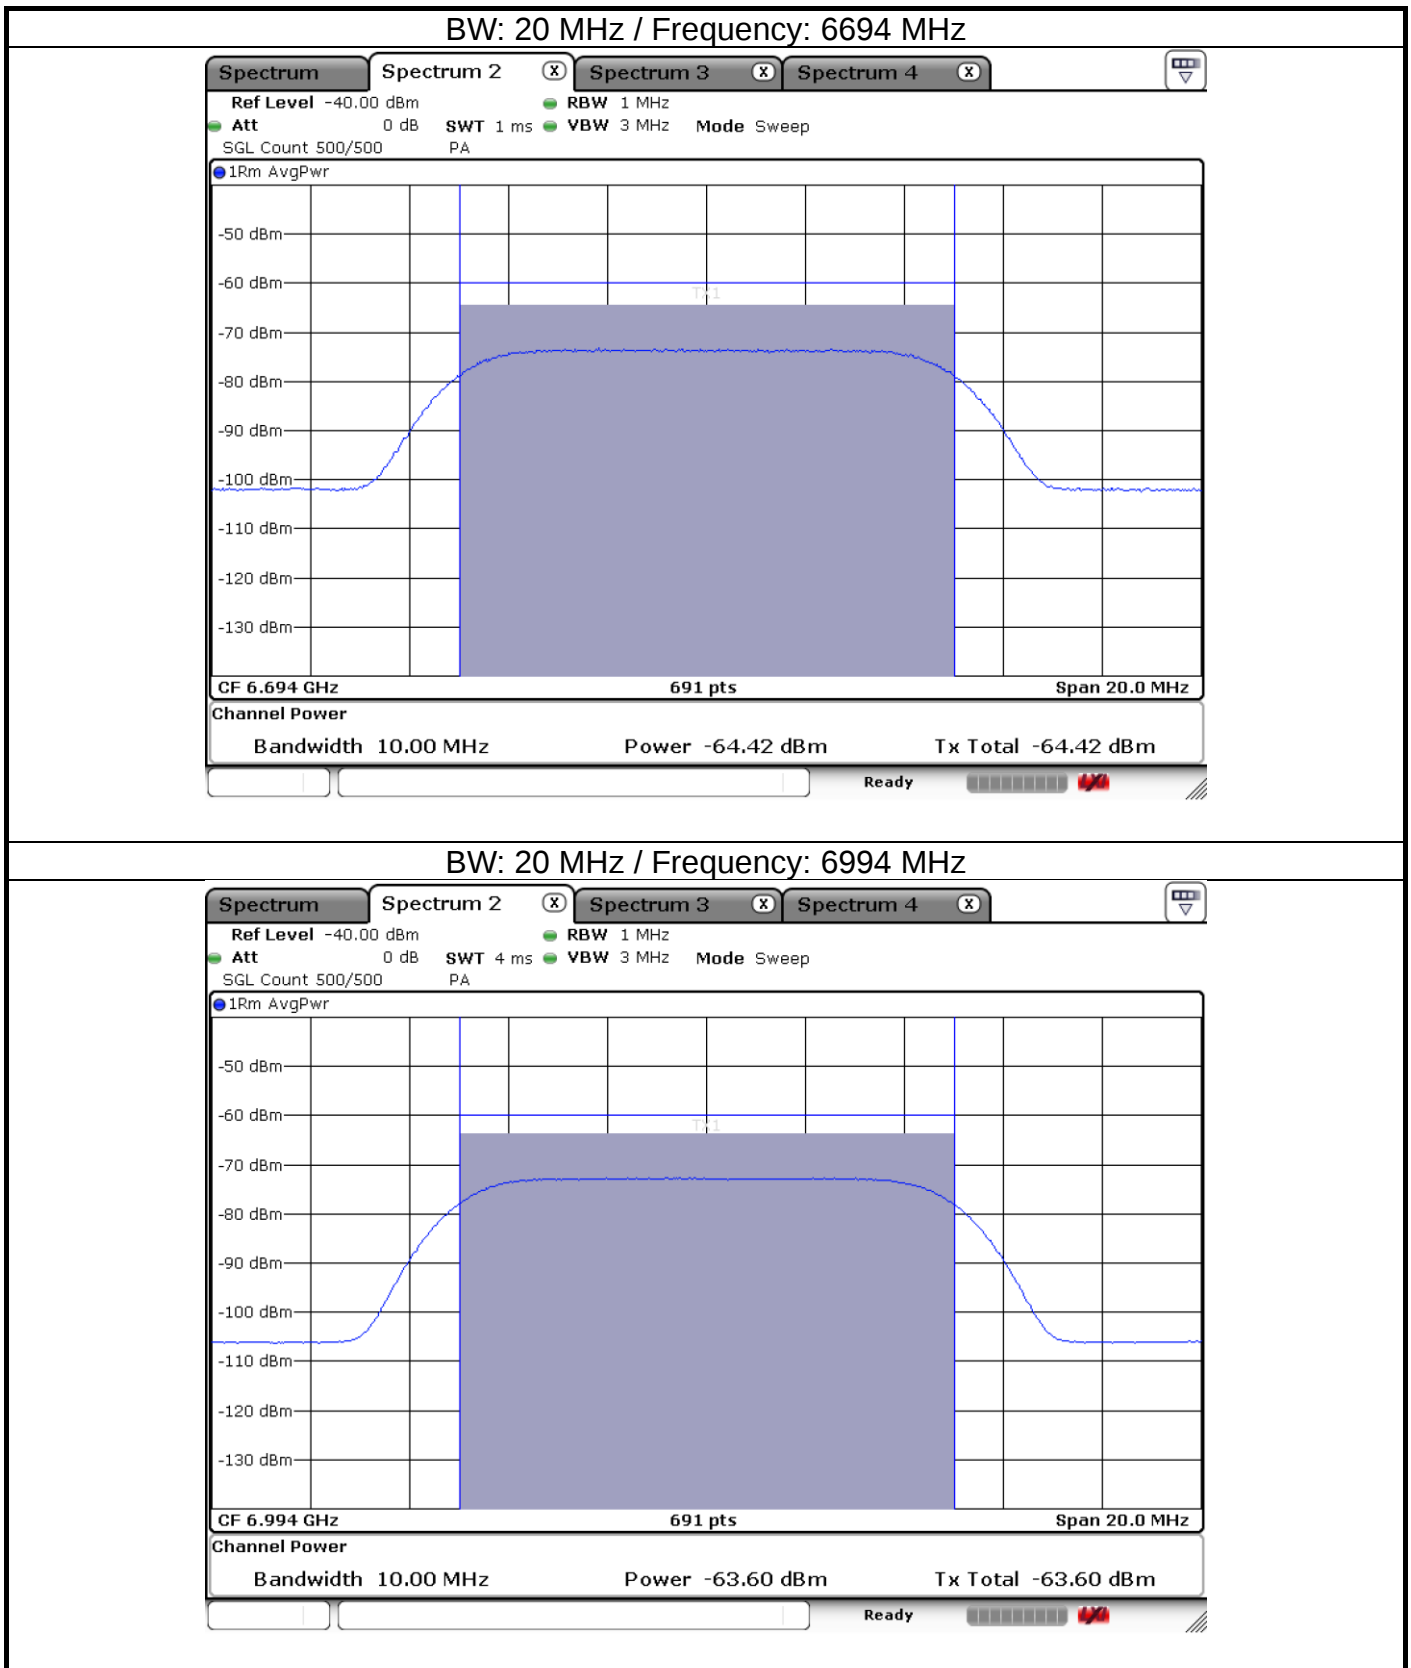


BW: 320 MHz / Frequency: 5950 MHz

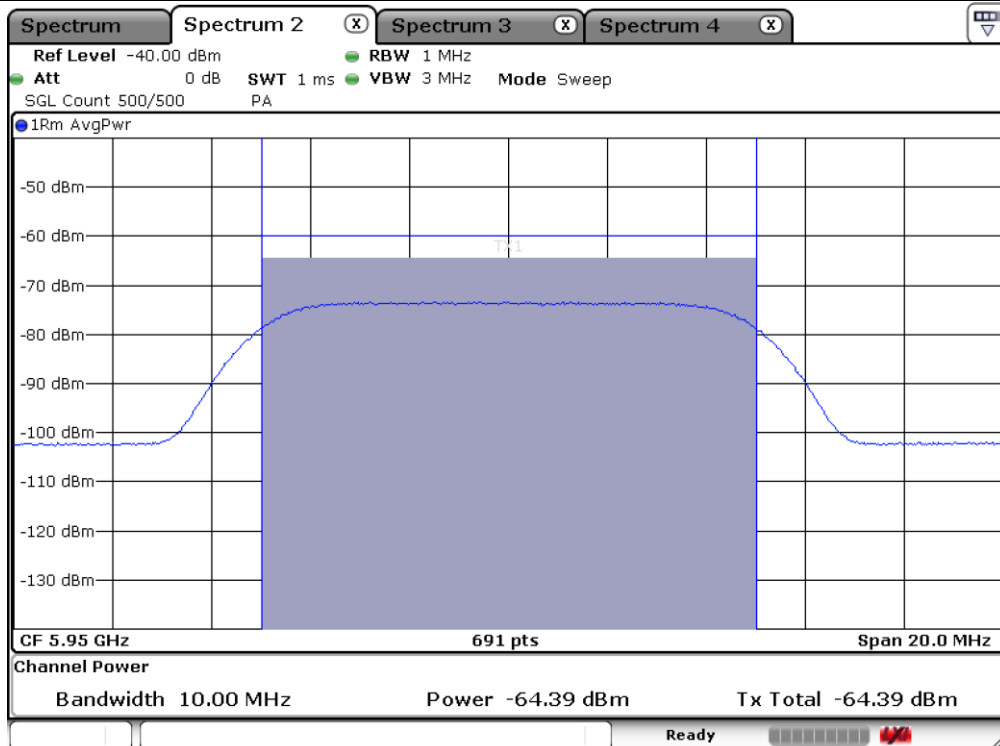


BW: 320 MHz / Frequency: 6100 MHz

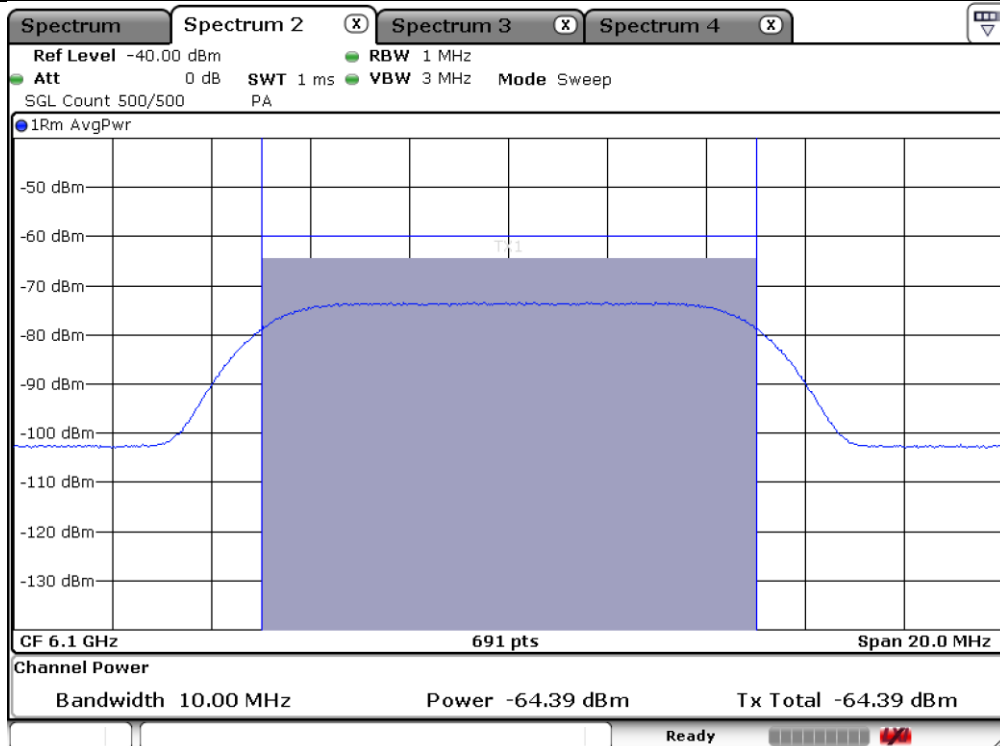


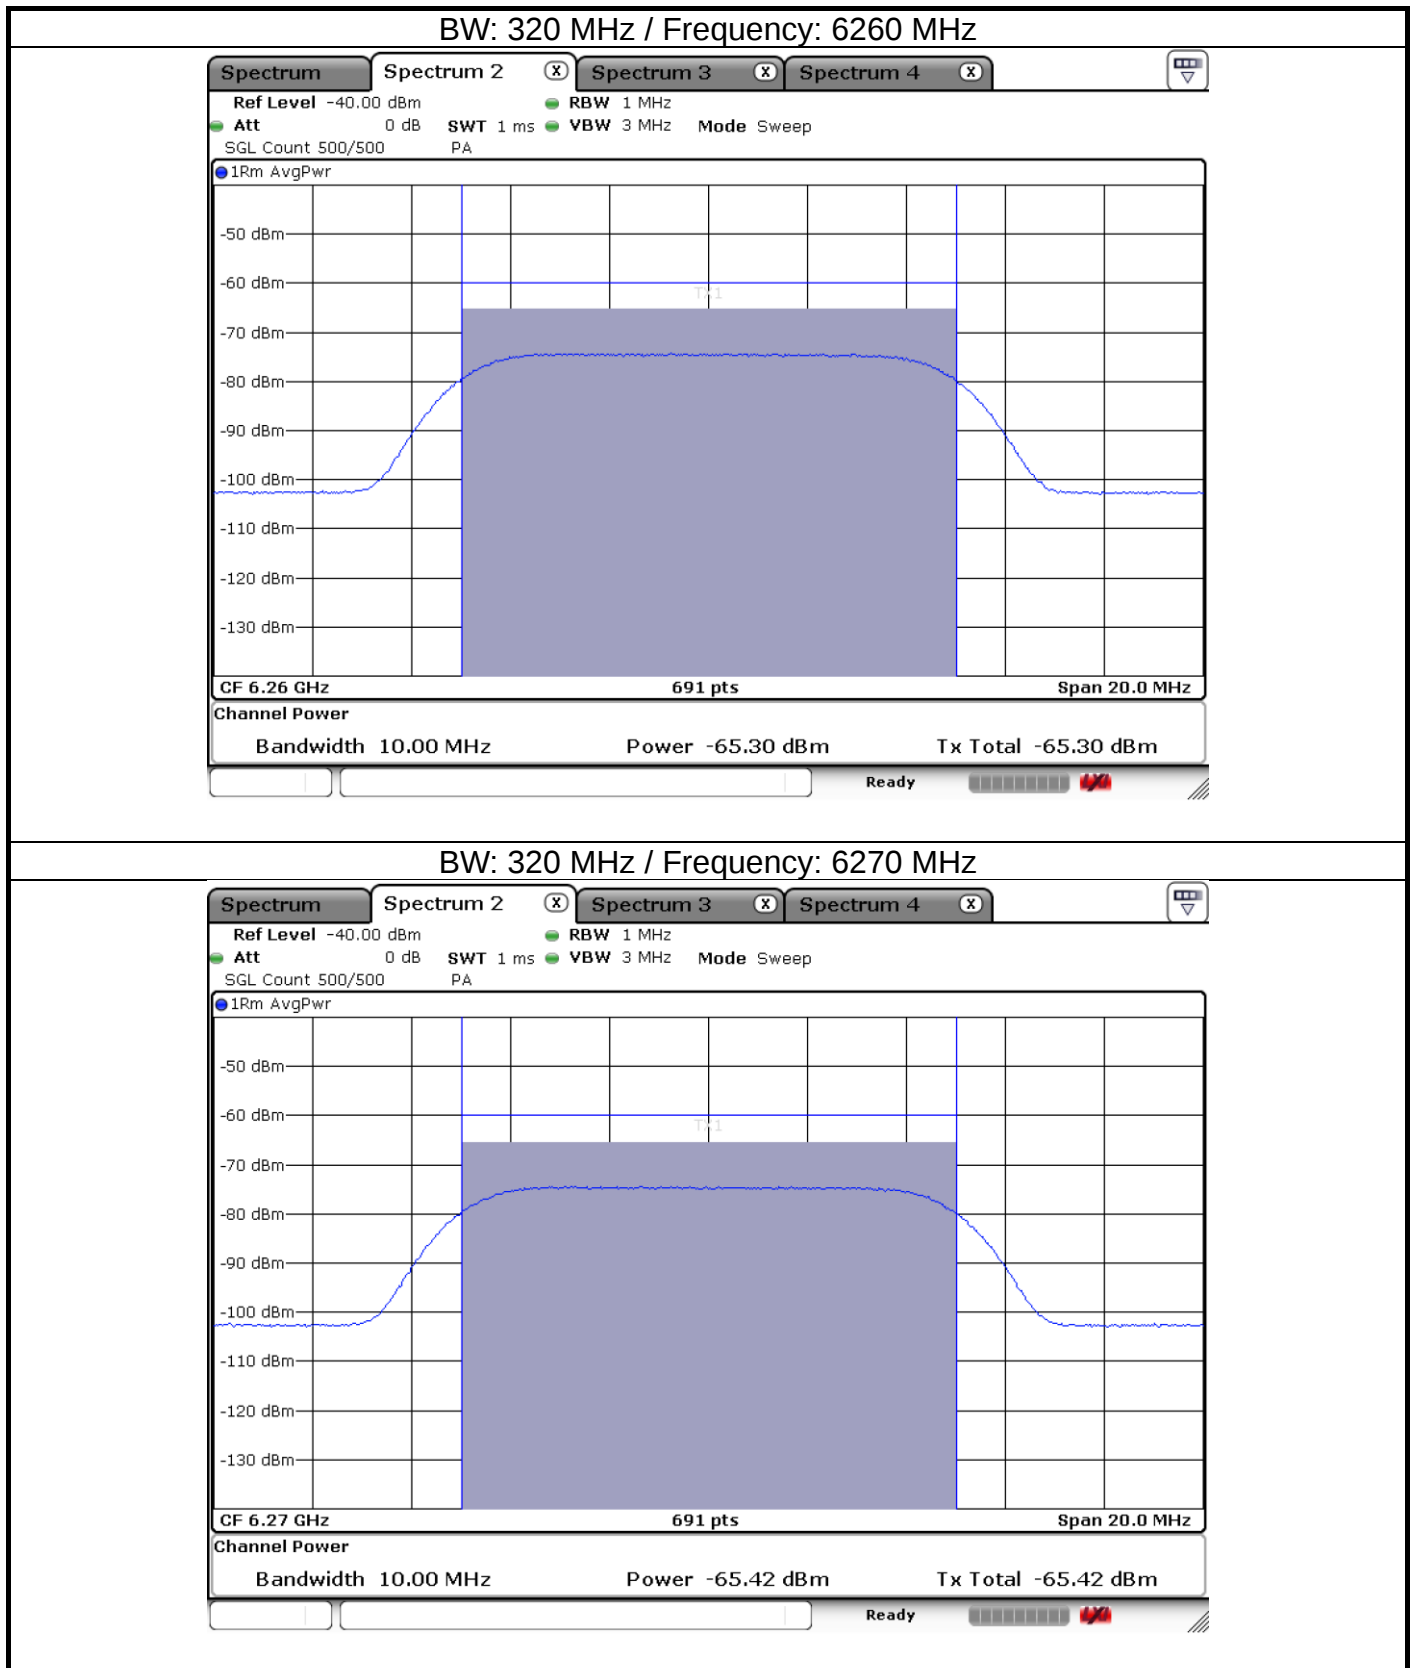


BW: 320 MHz / Frequency: 6420 MHz

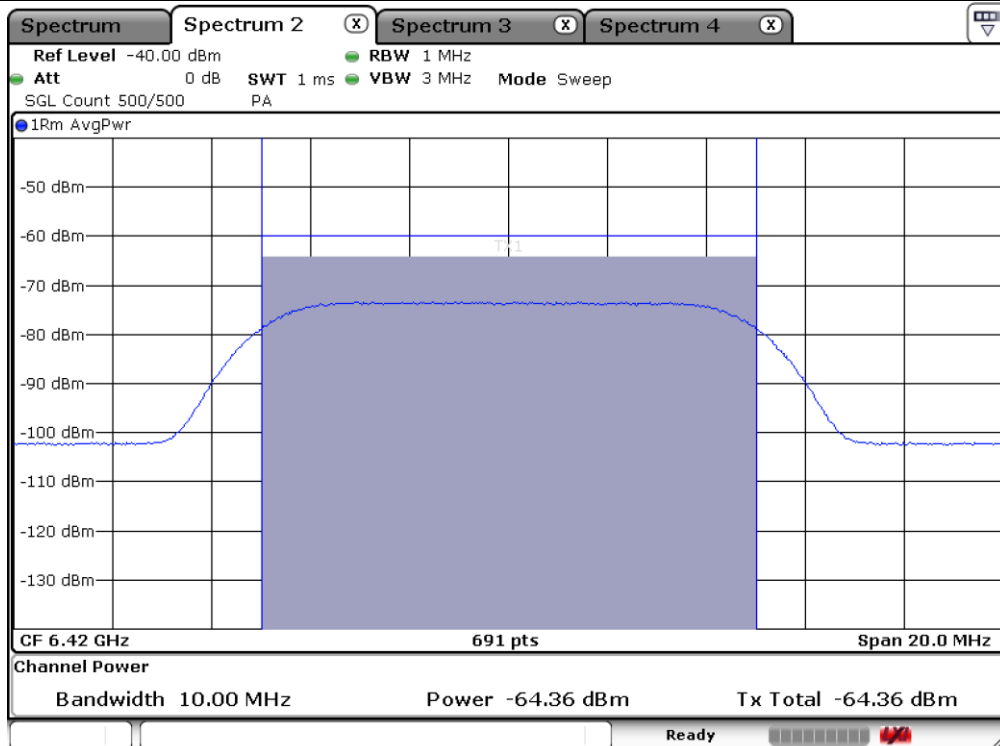


BW: 320 MHz / Frequency: 6580 MHz

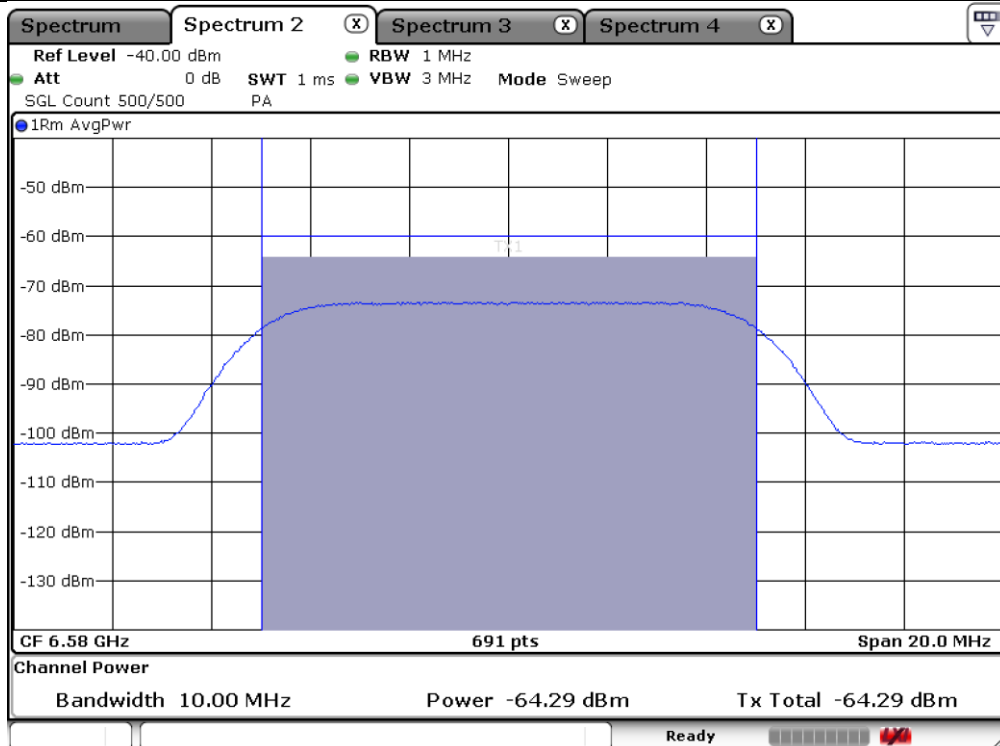


BW: 320 MHz / Frequency: 6750 MHz


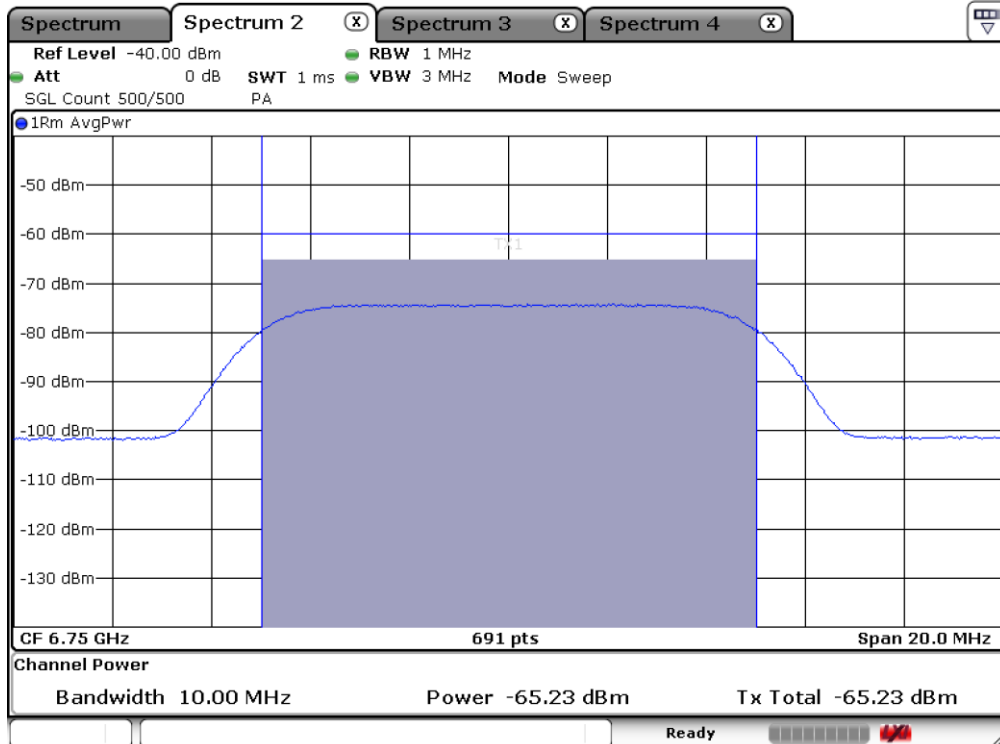




BW: 320 MHz / Frequency: 6900 MHz

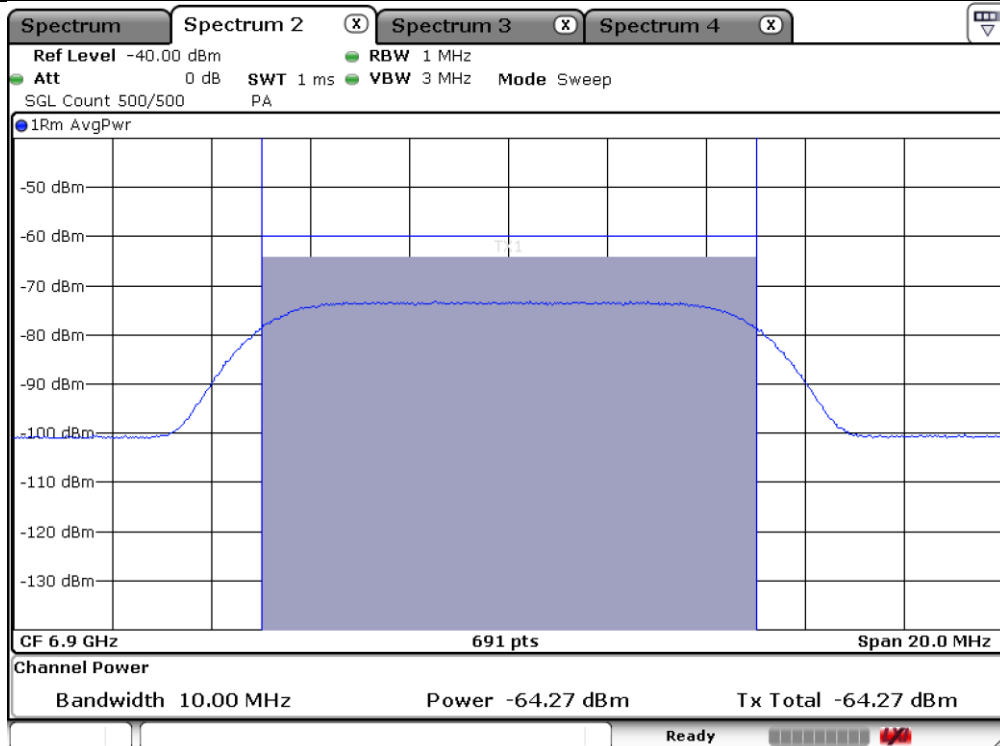


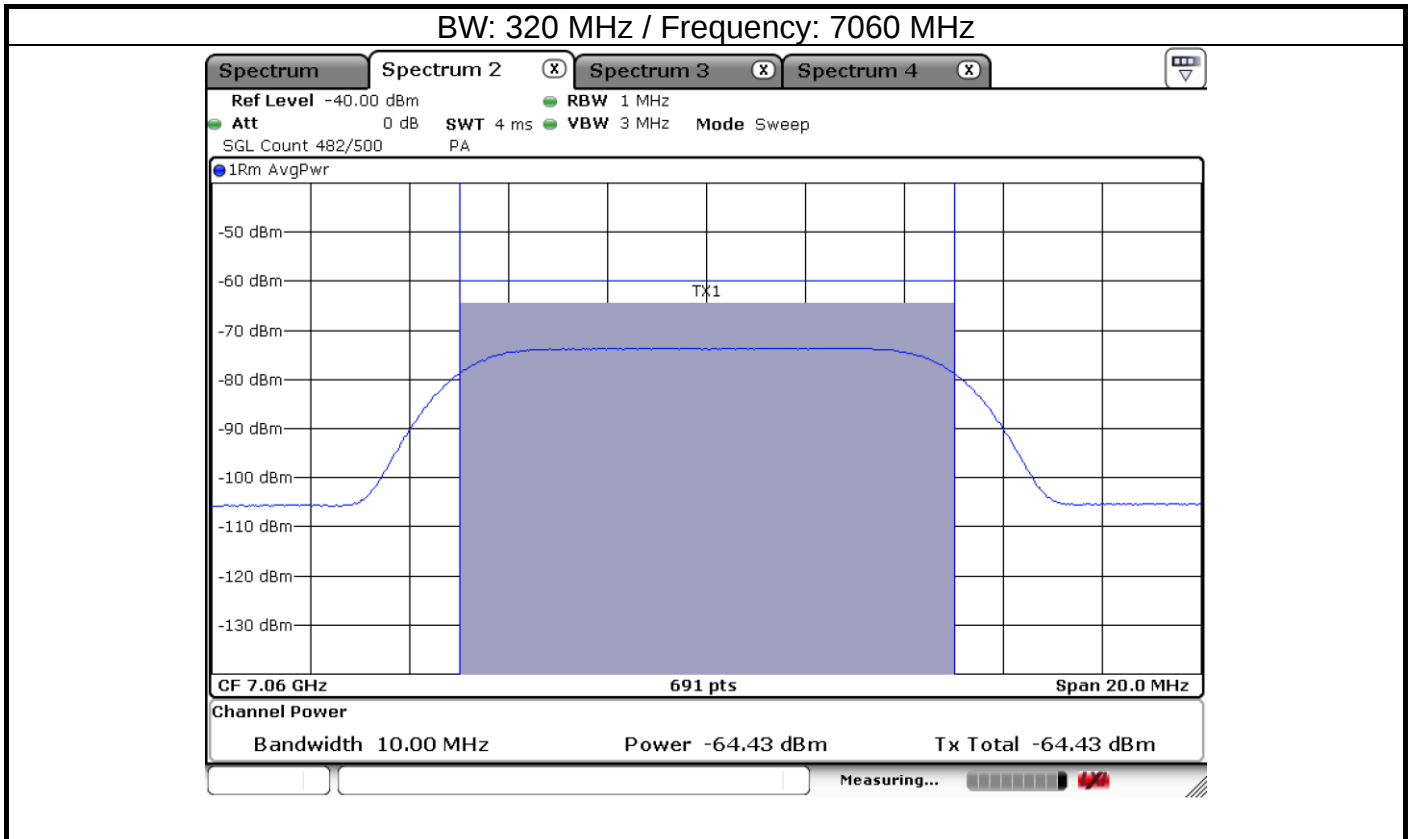


Test plot of Contention Based Protocol EUT Normal transmission

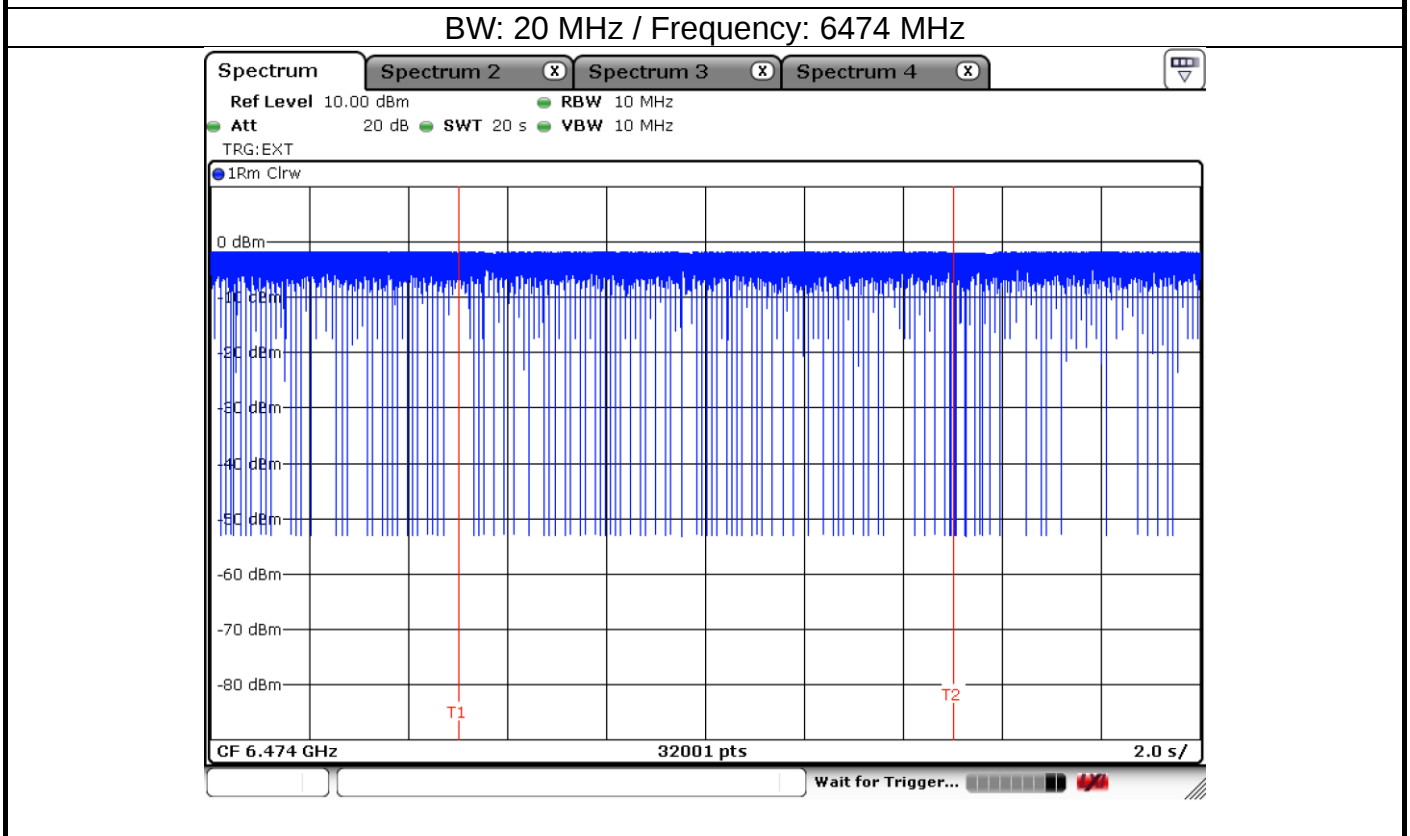
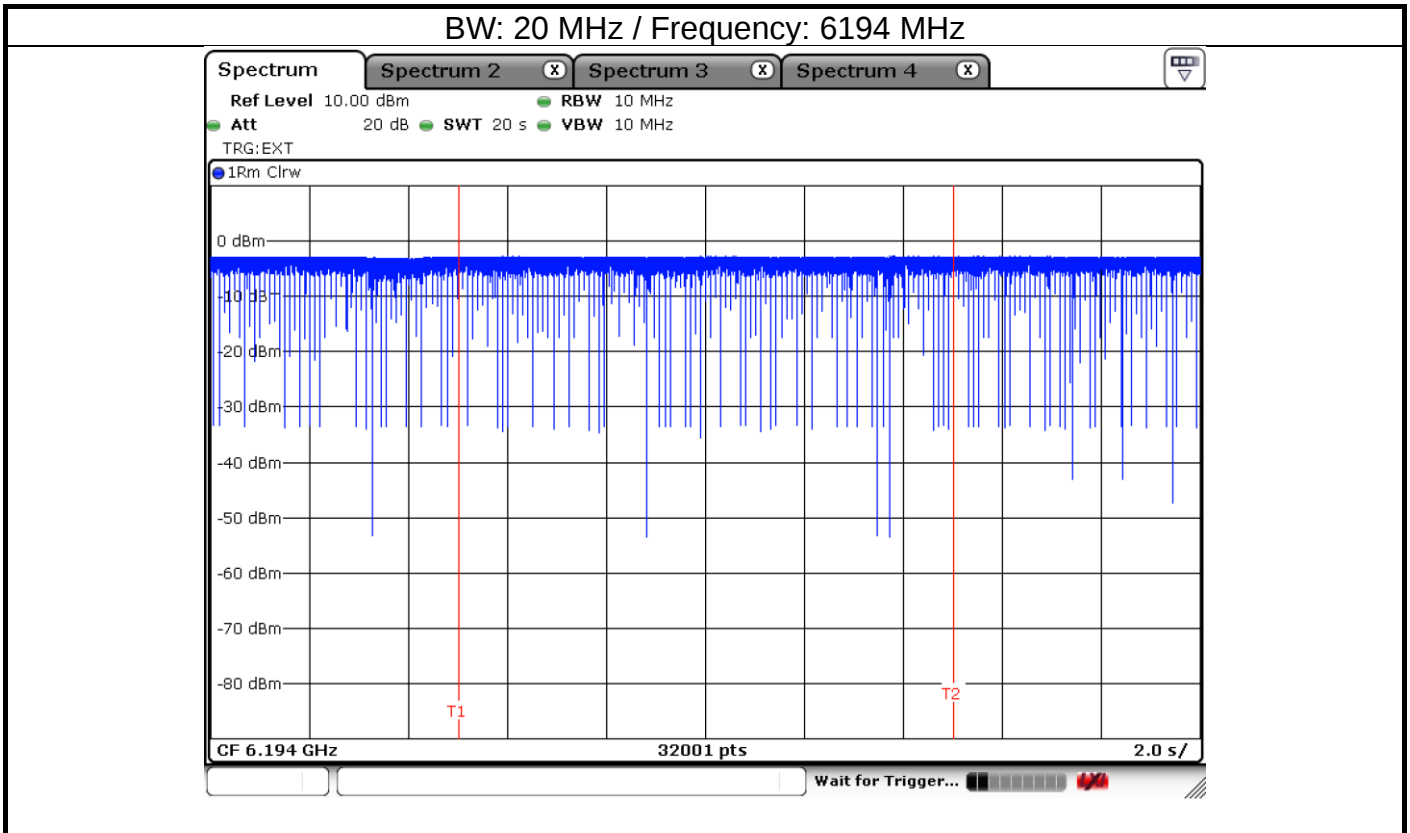


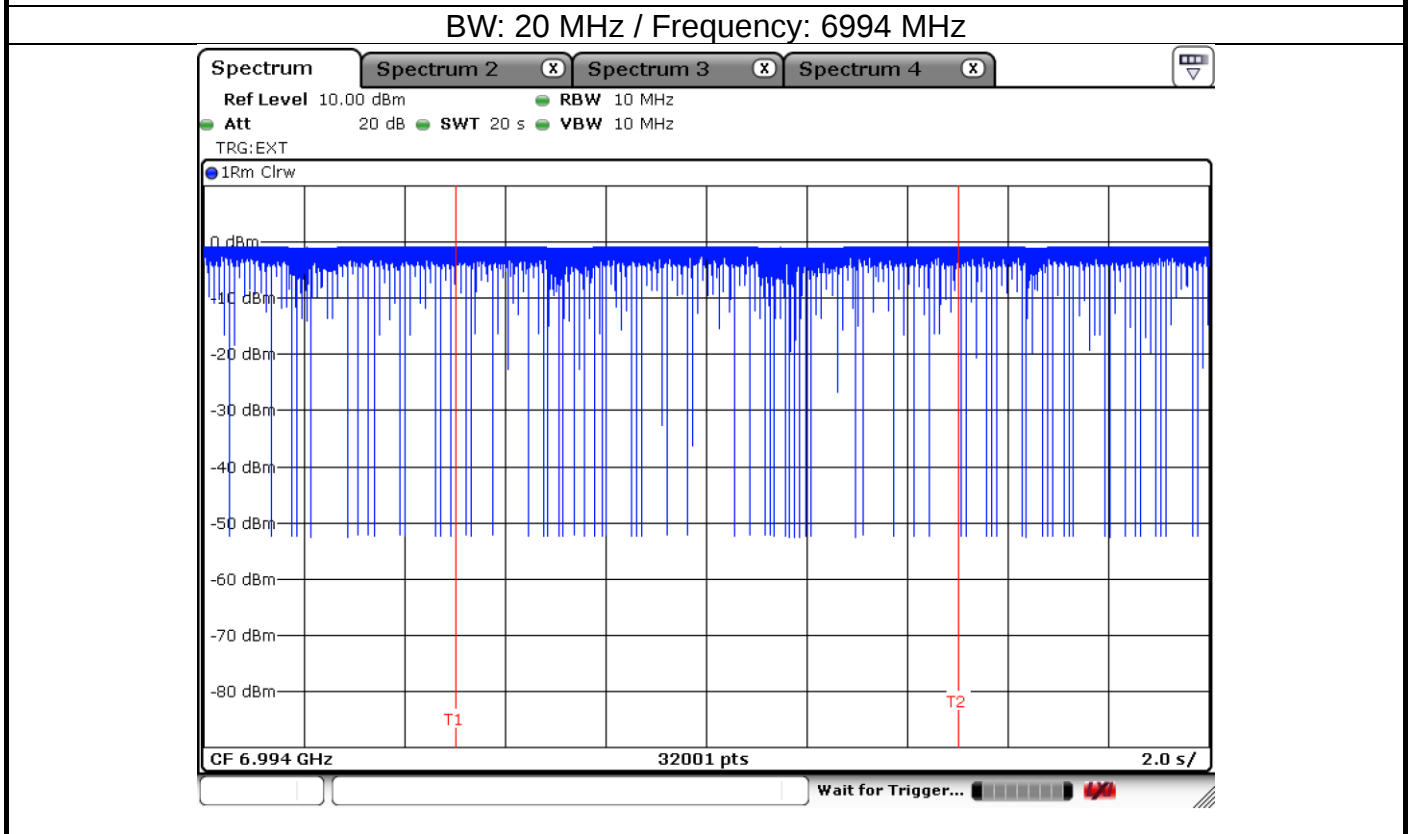
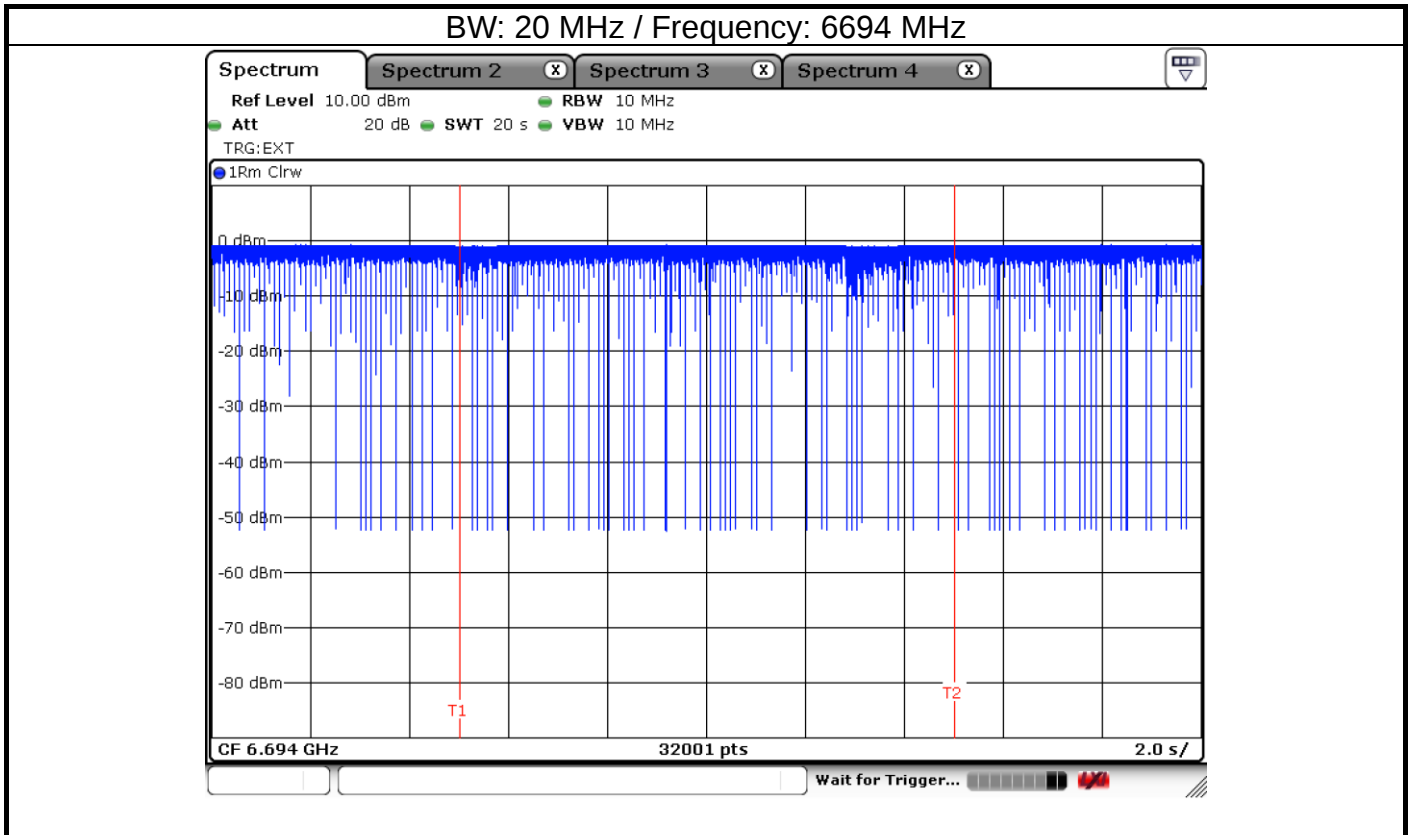


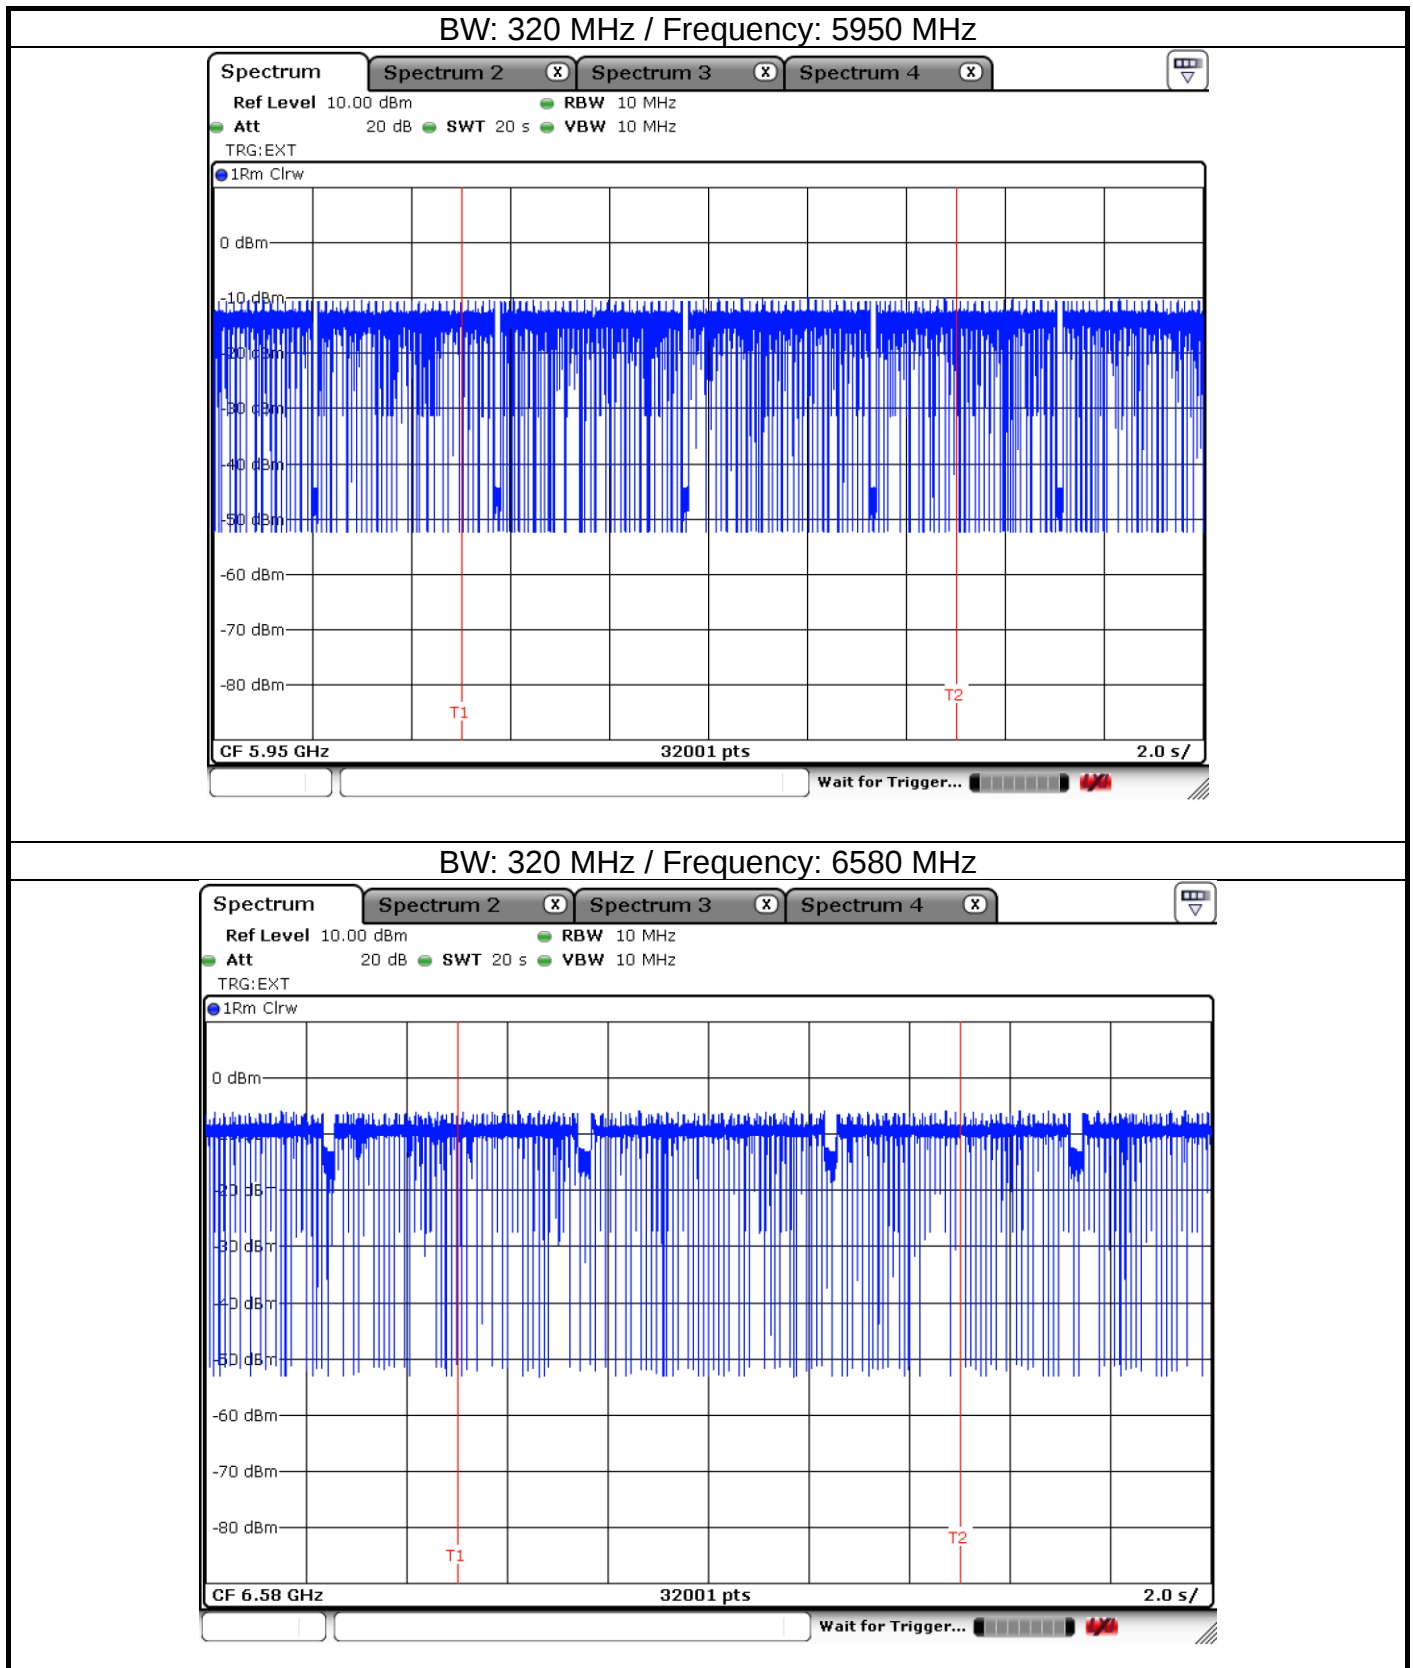


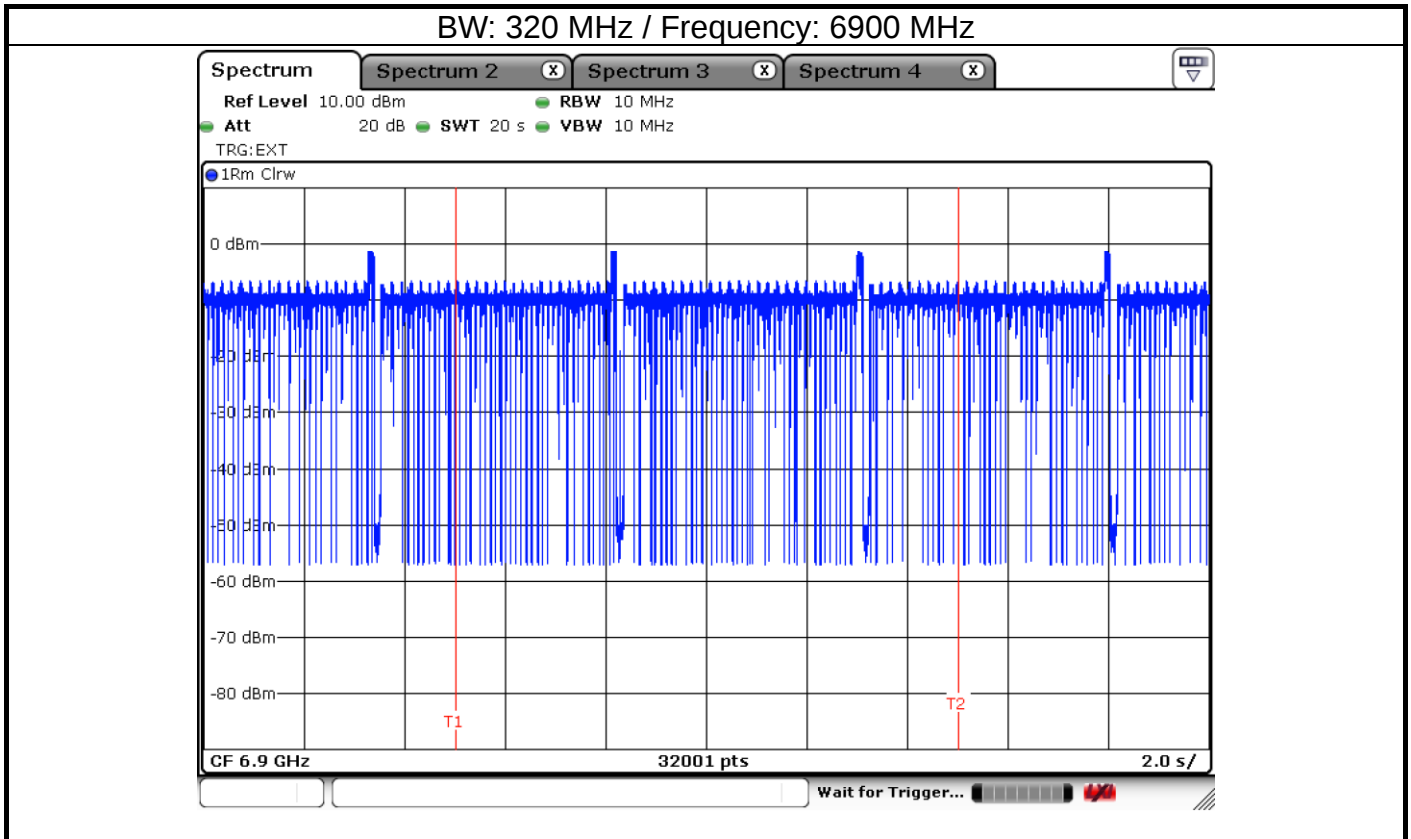


EUT Minimal transmission

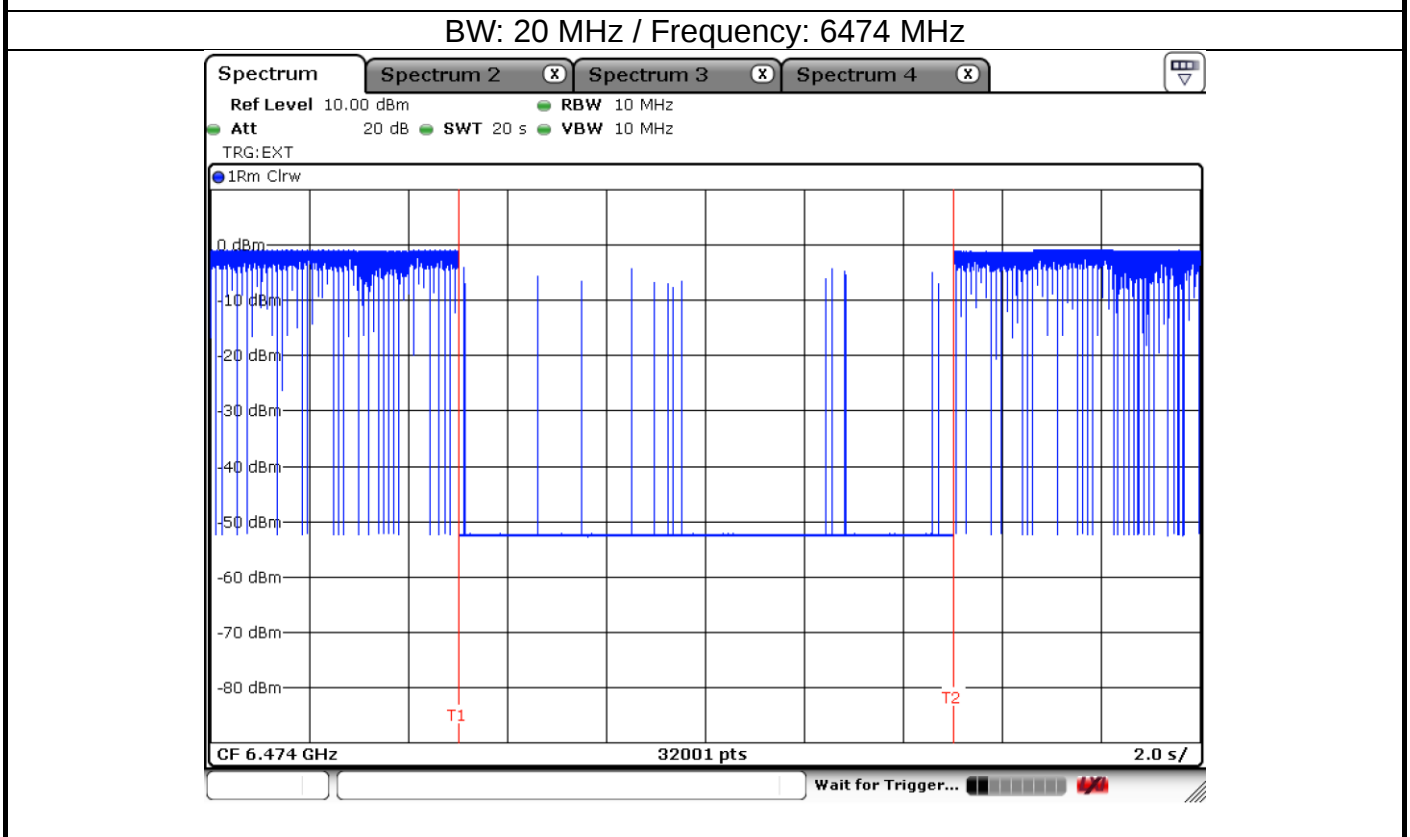
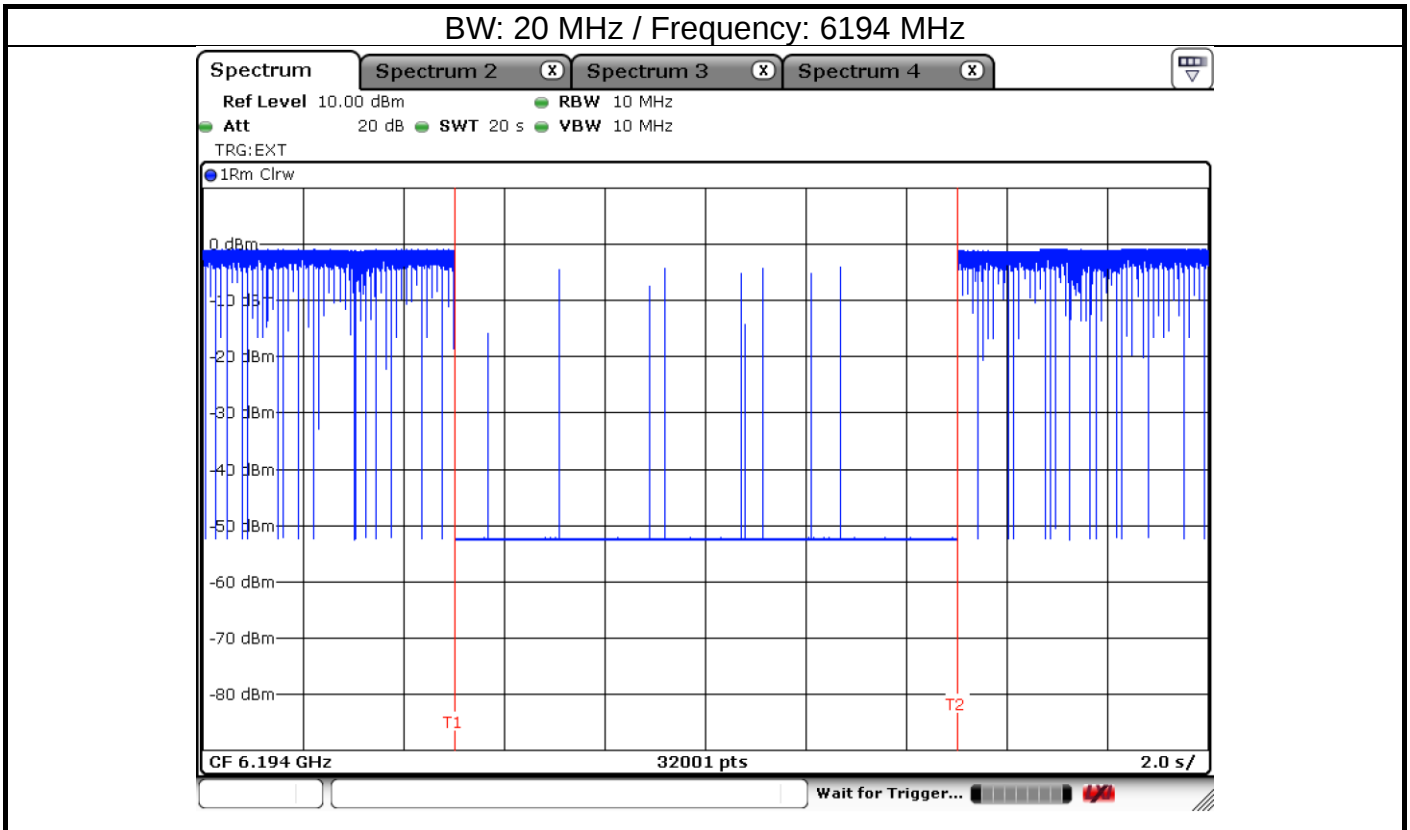


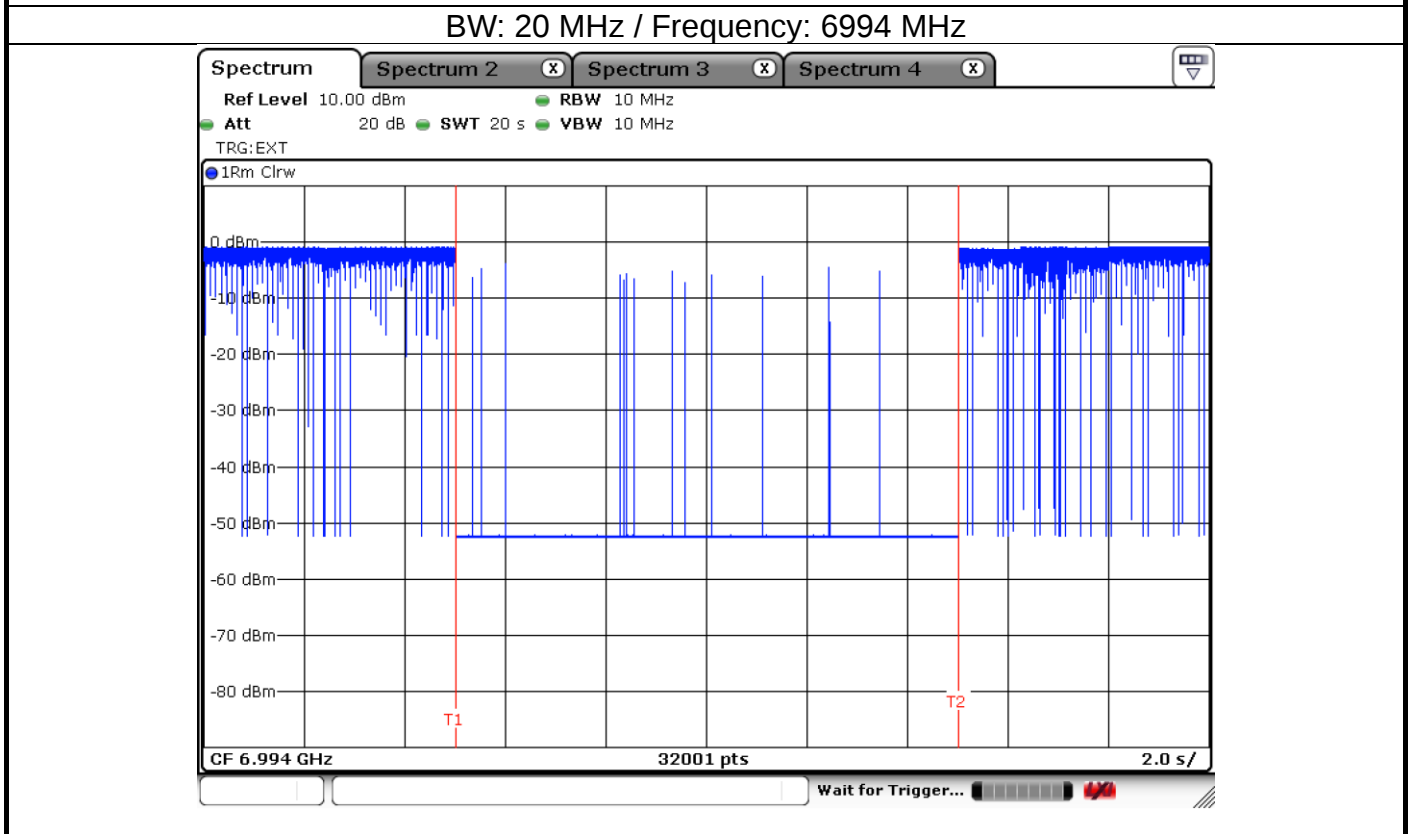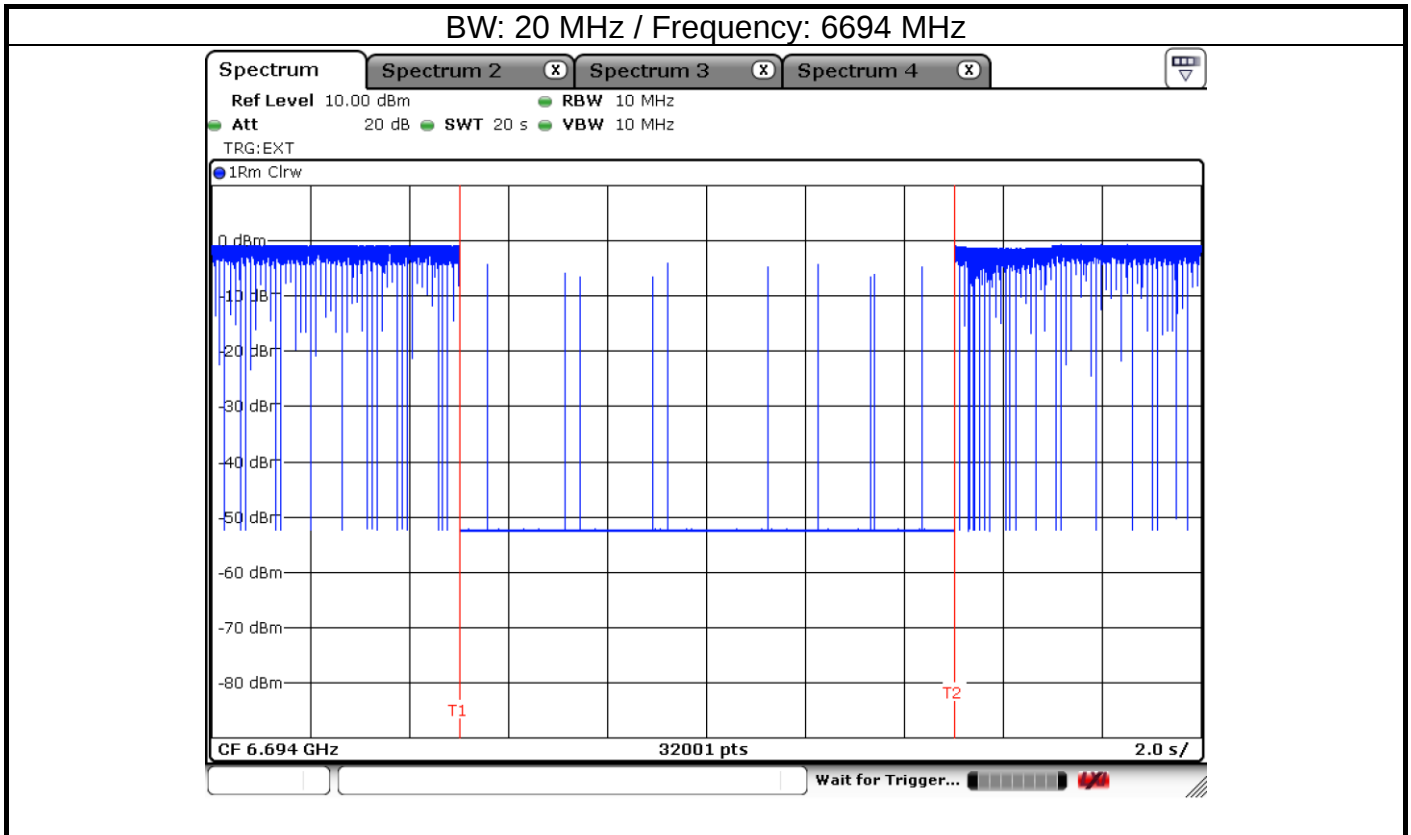

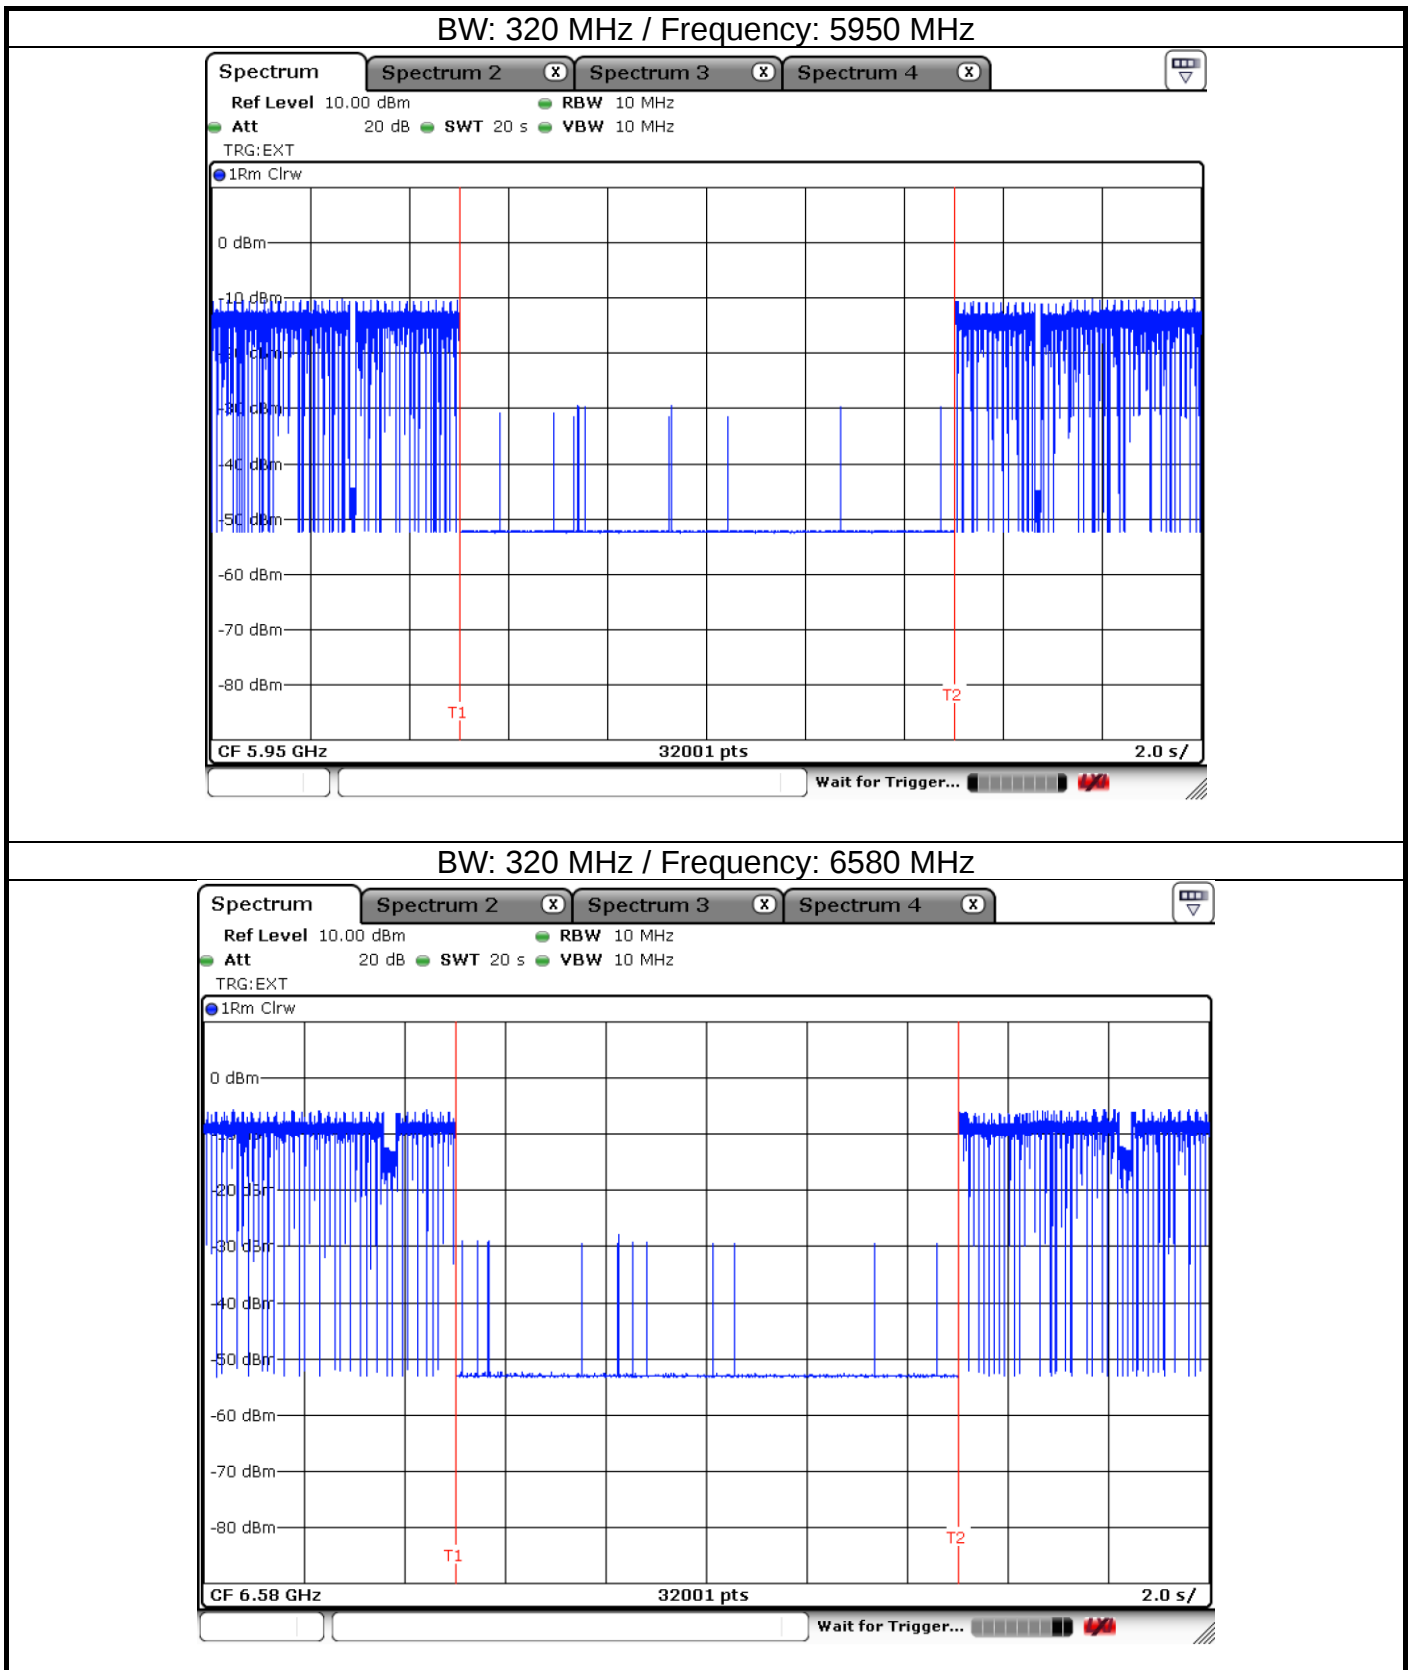


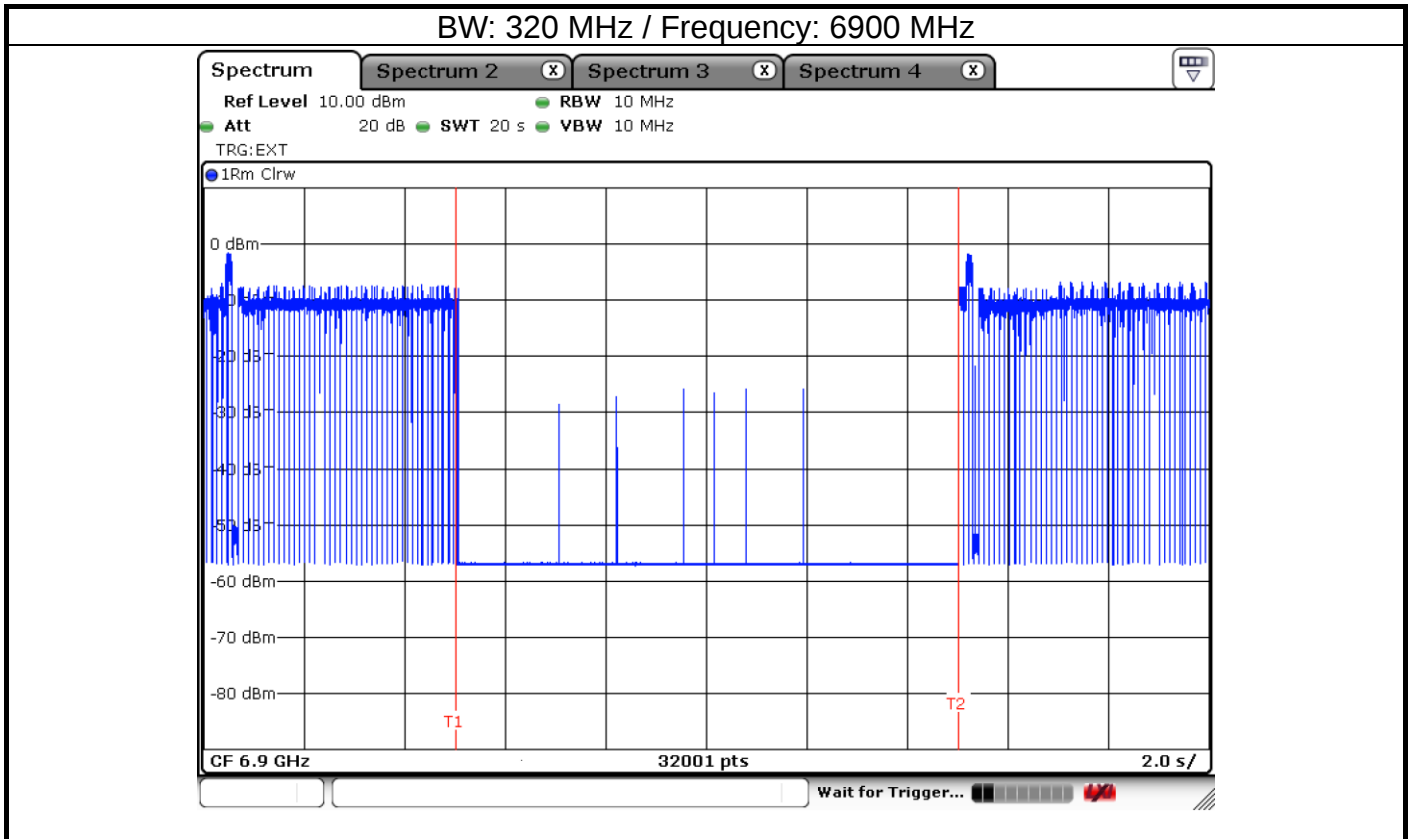


EUT ceased transmission

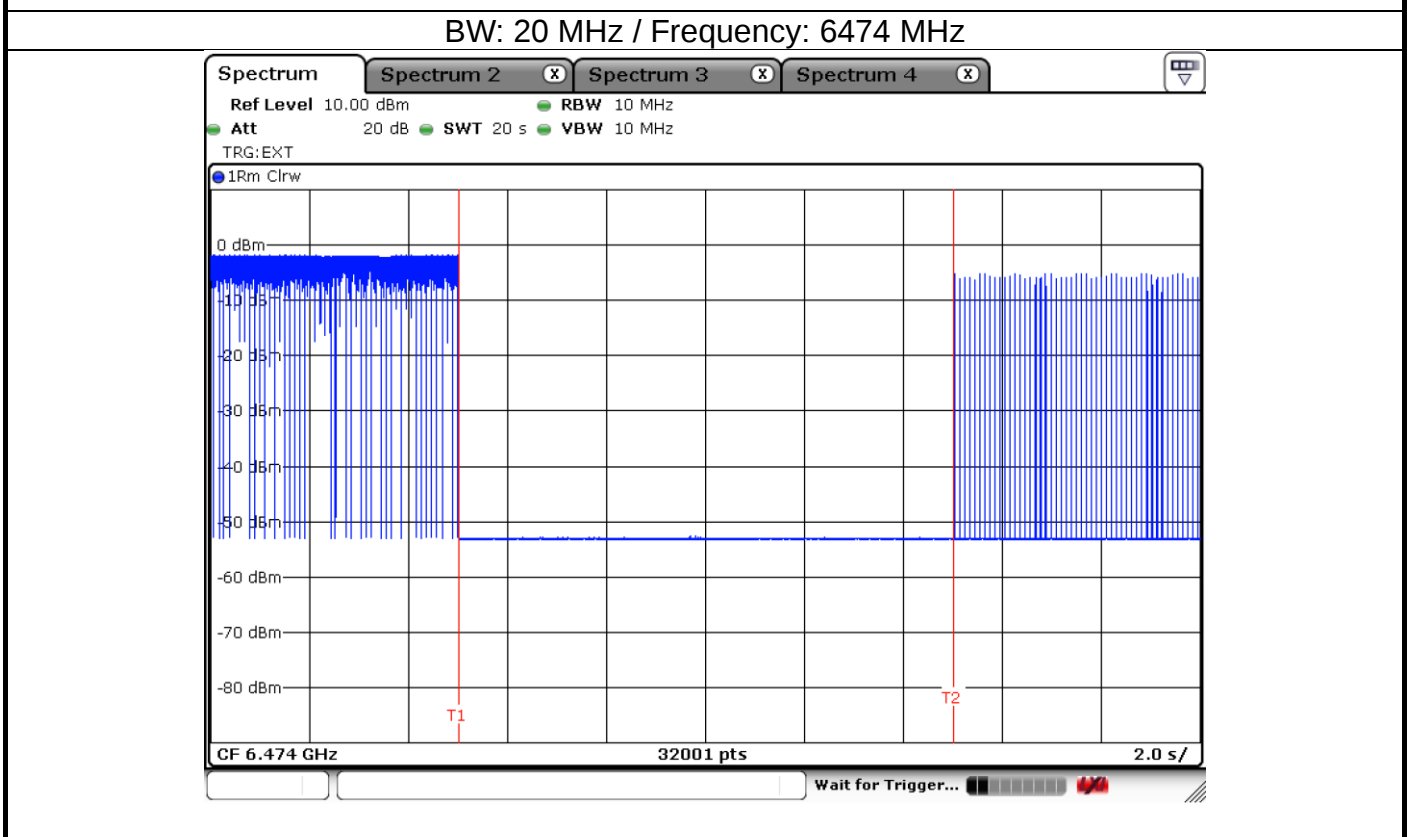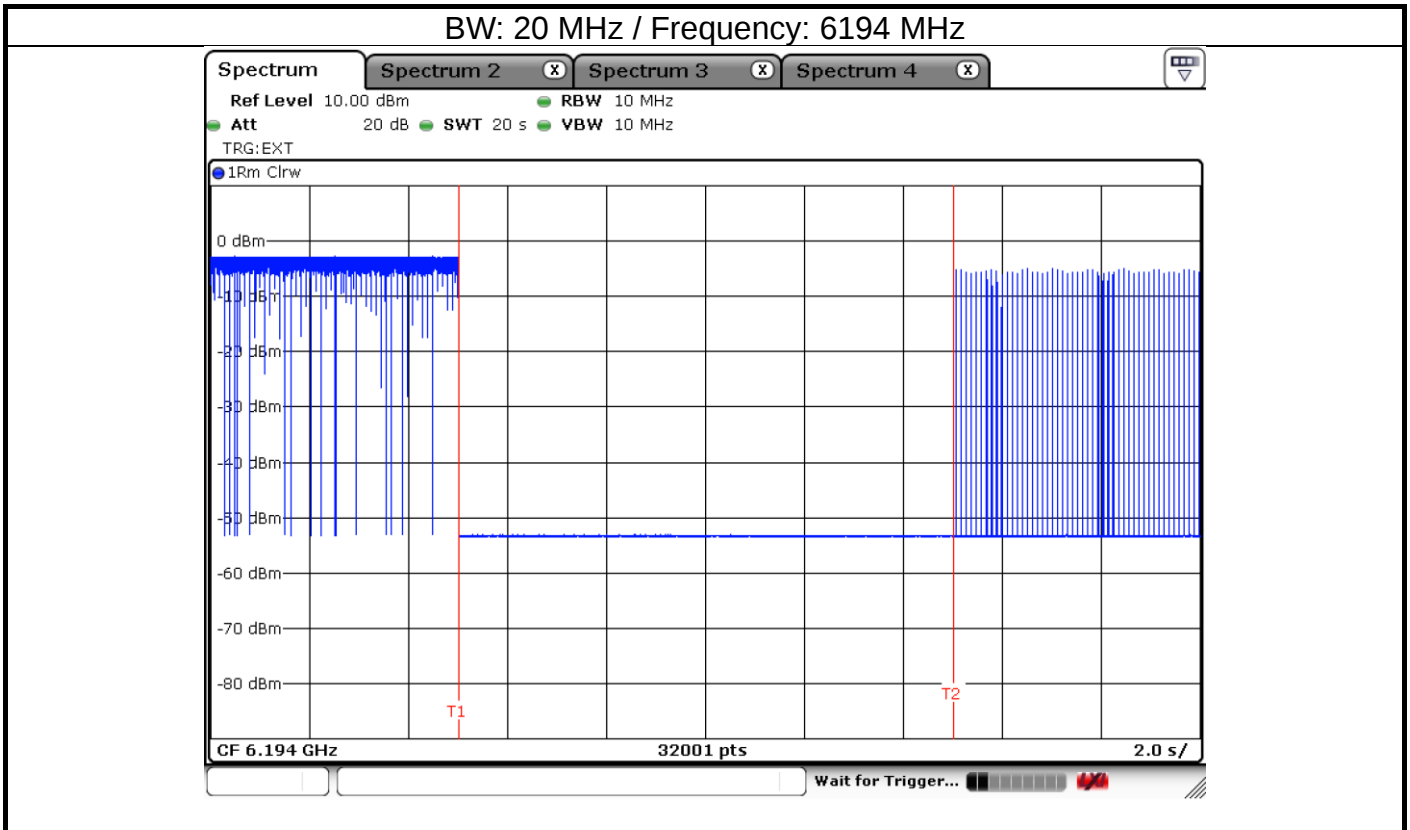


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

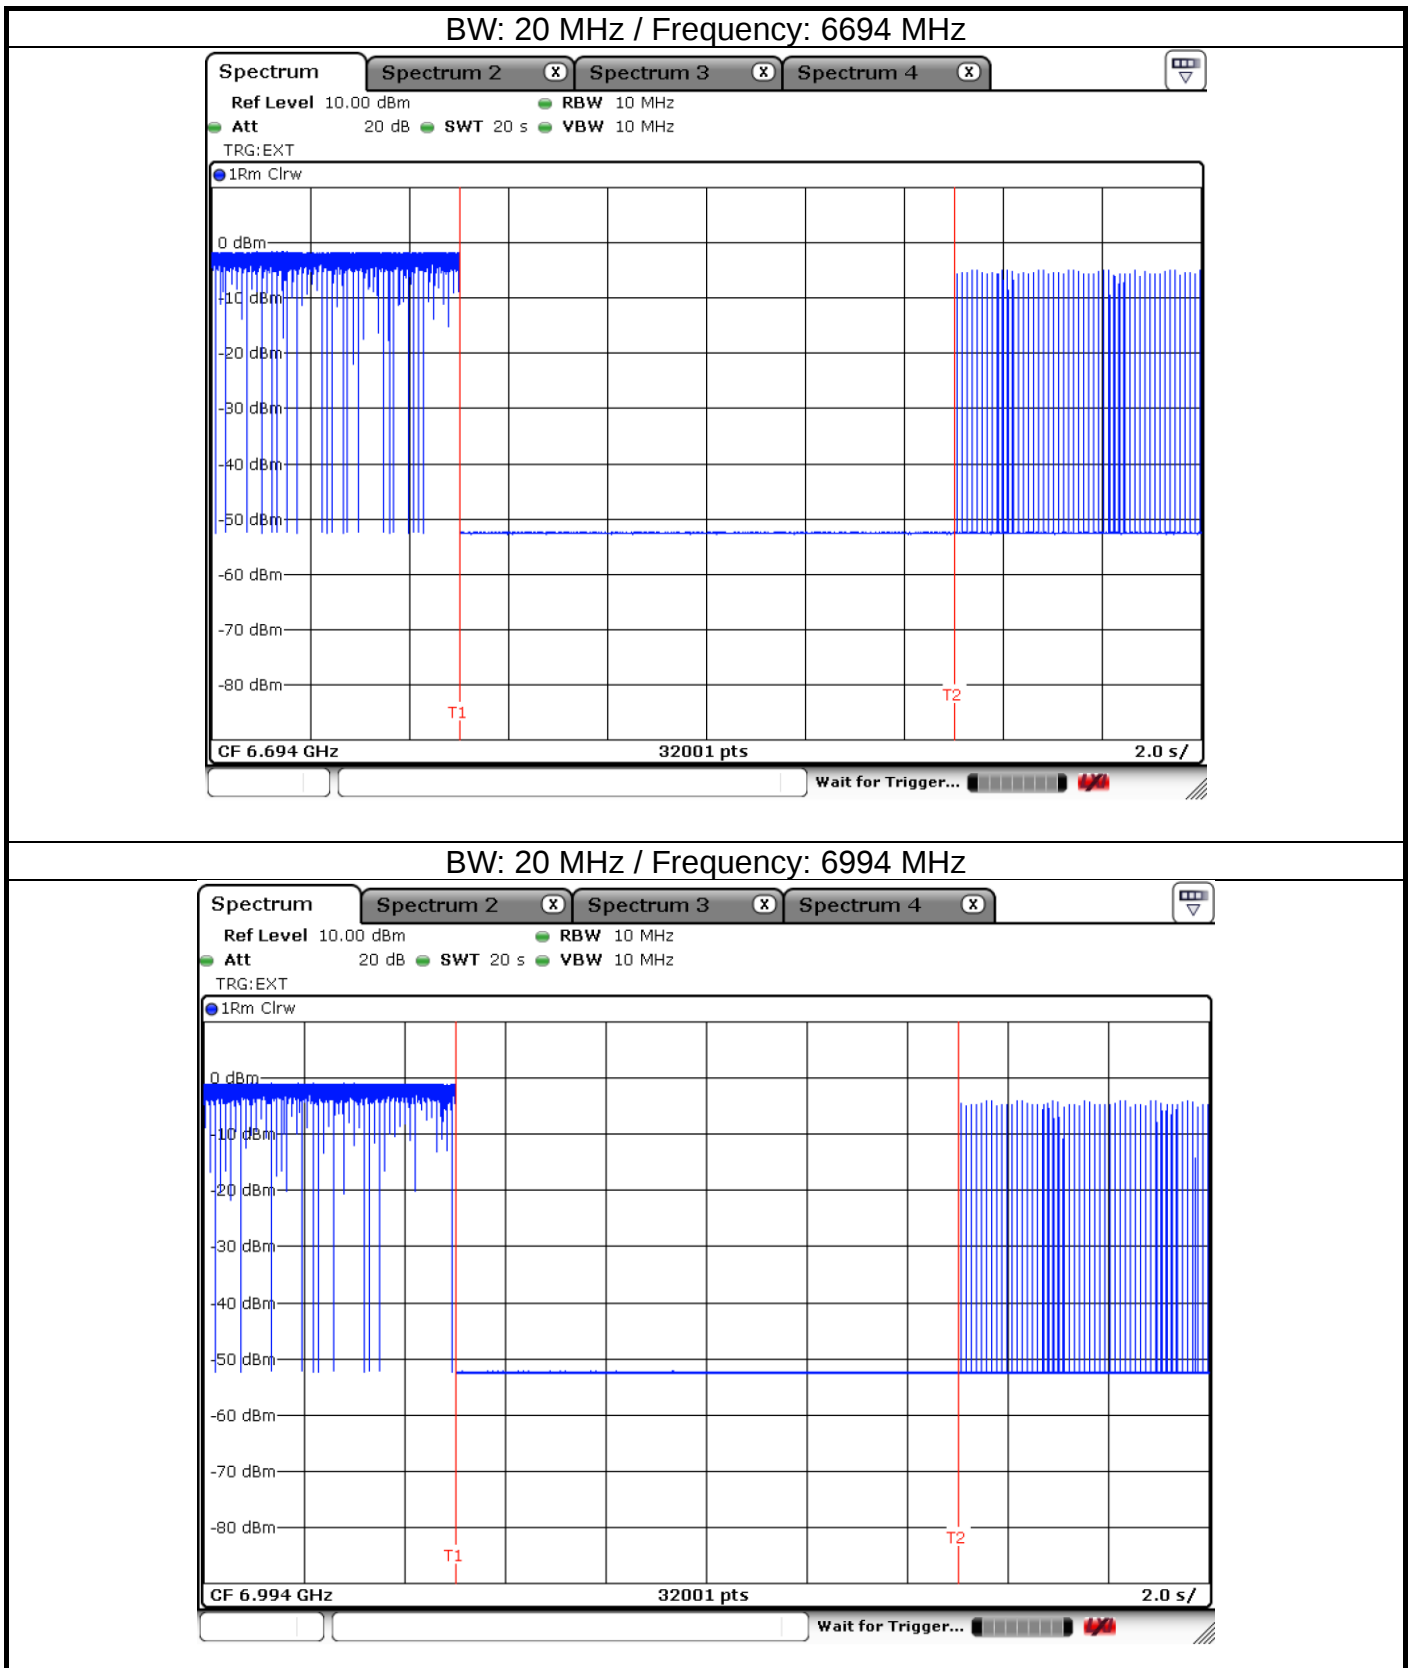


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

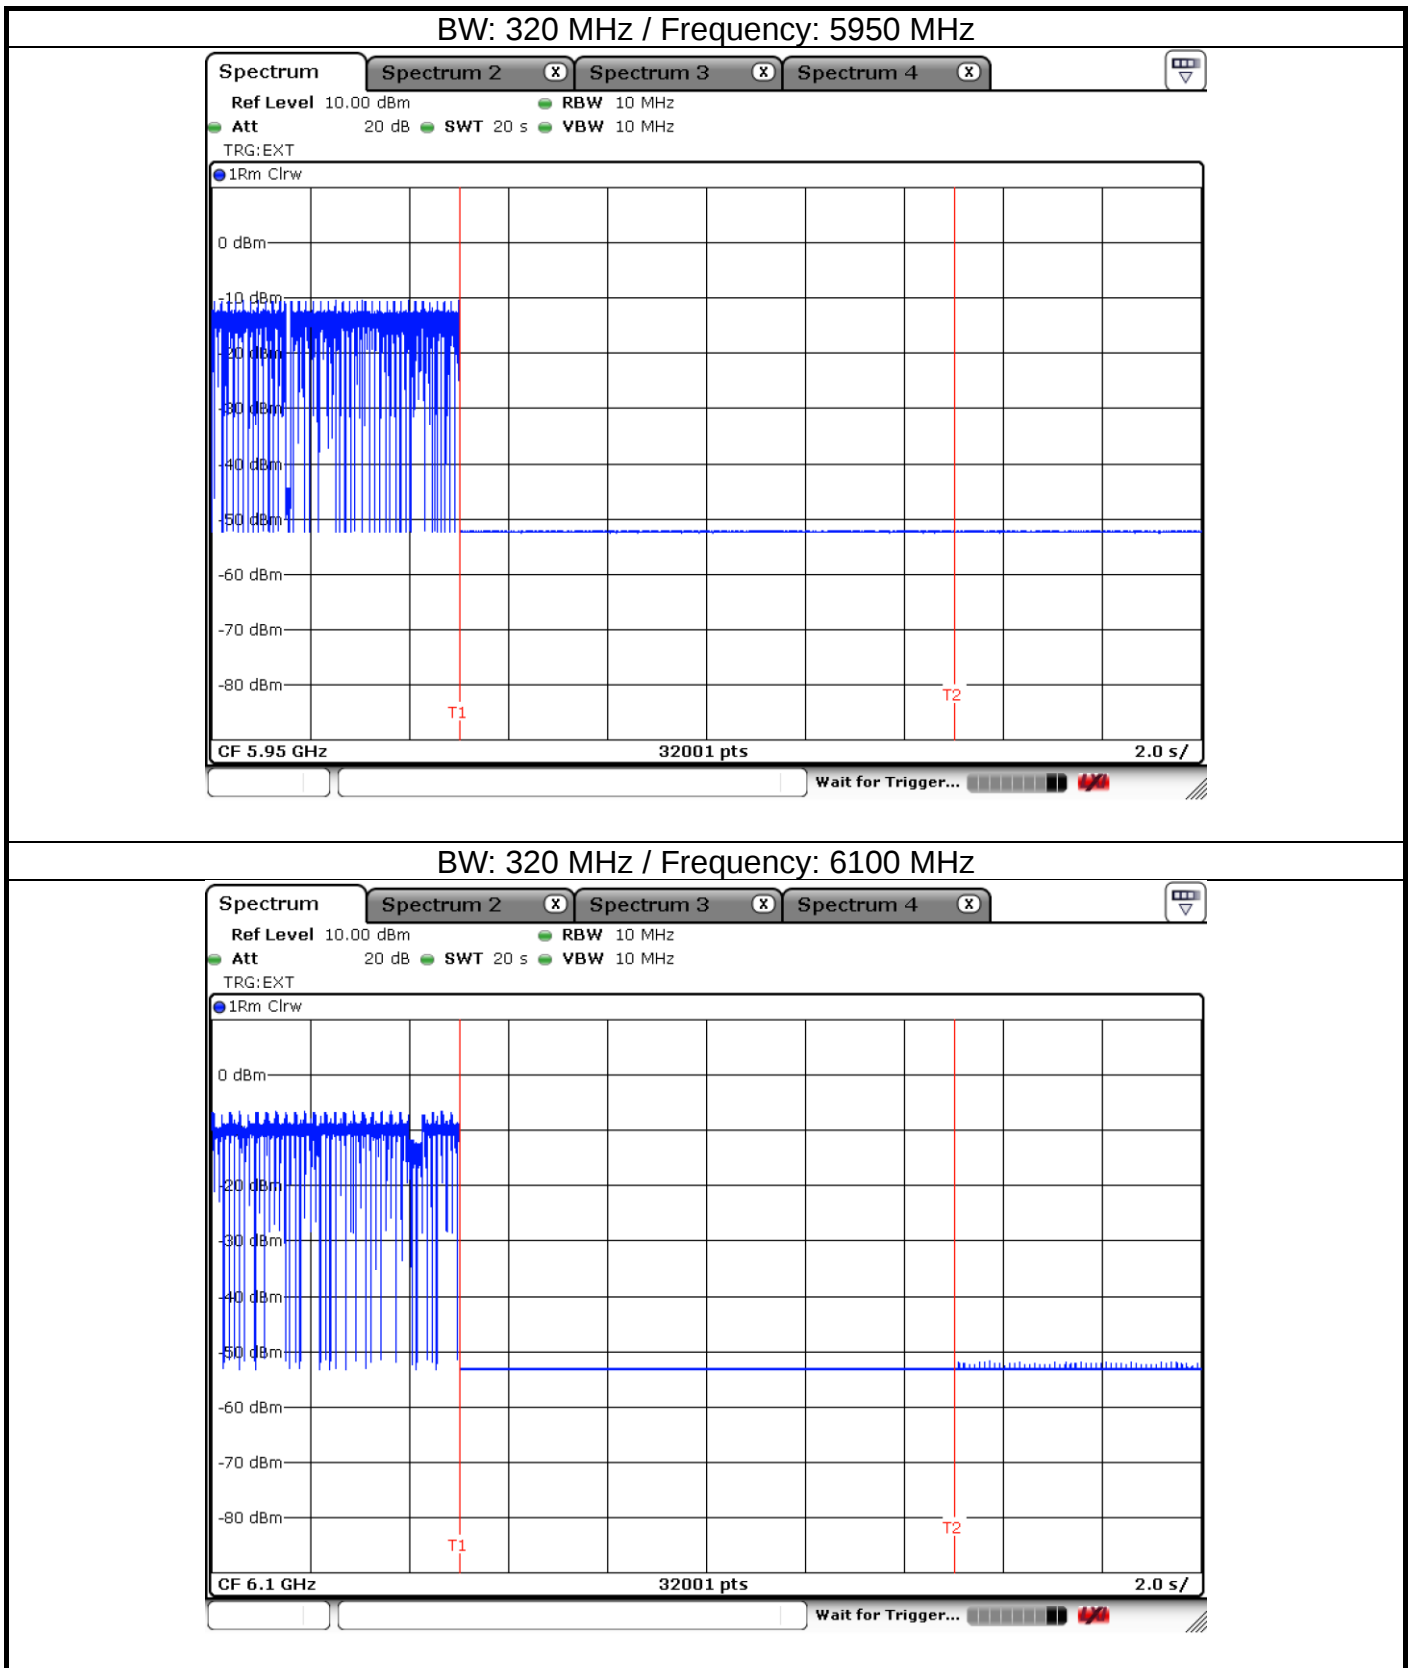


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

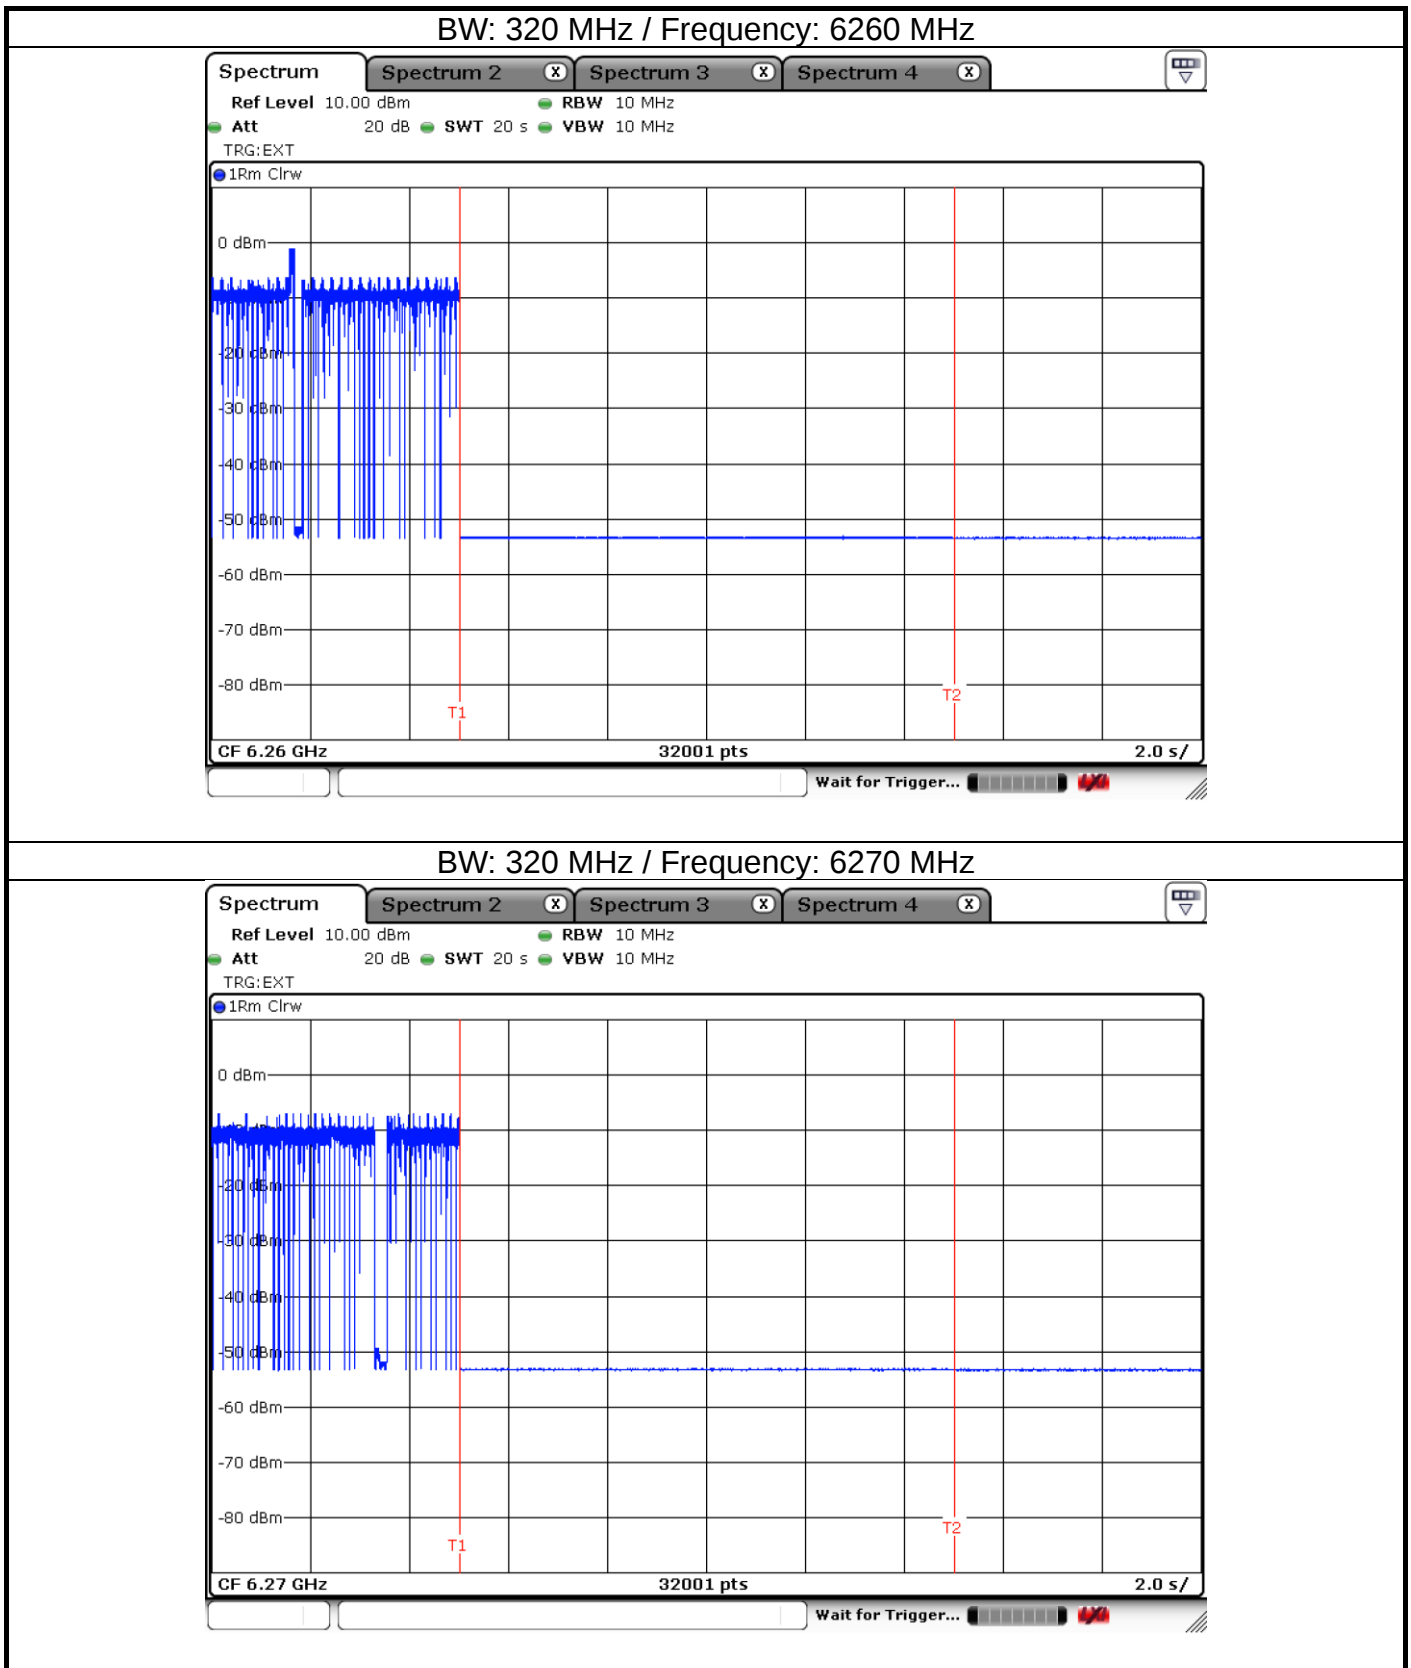


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

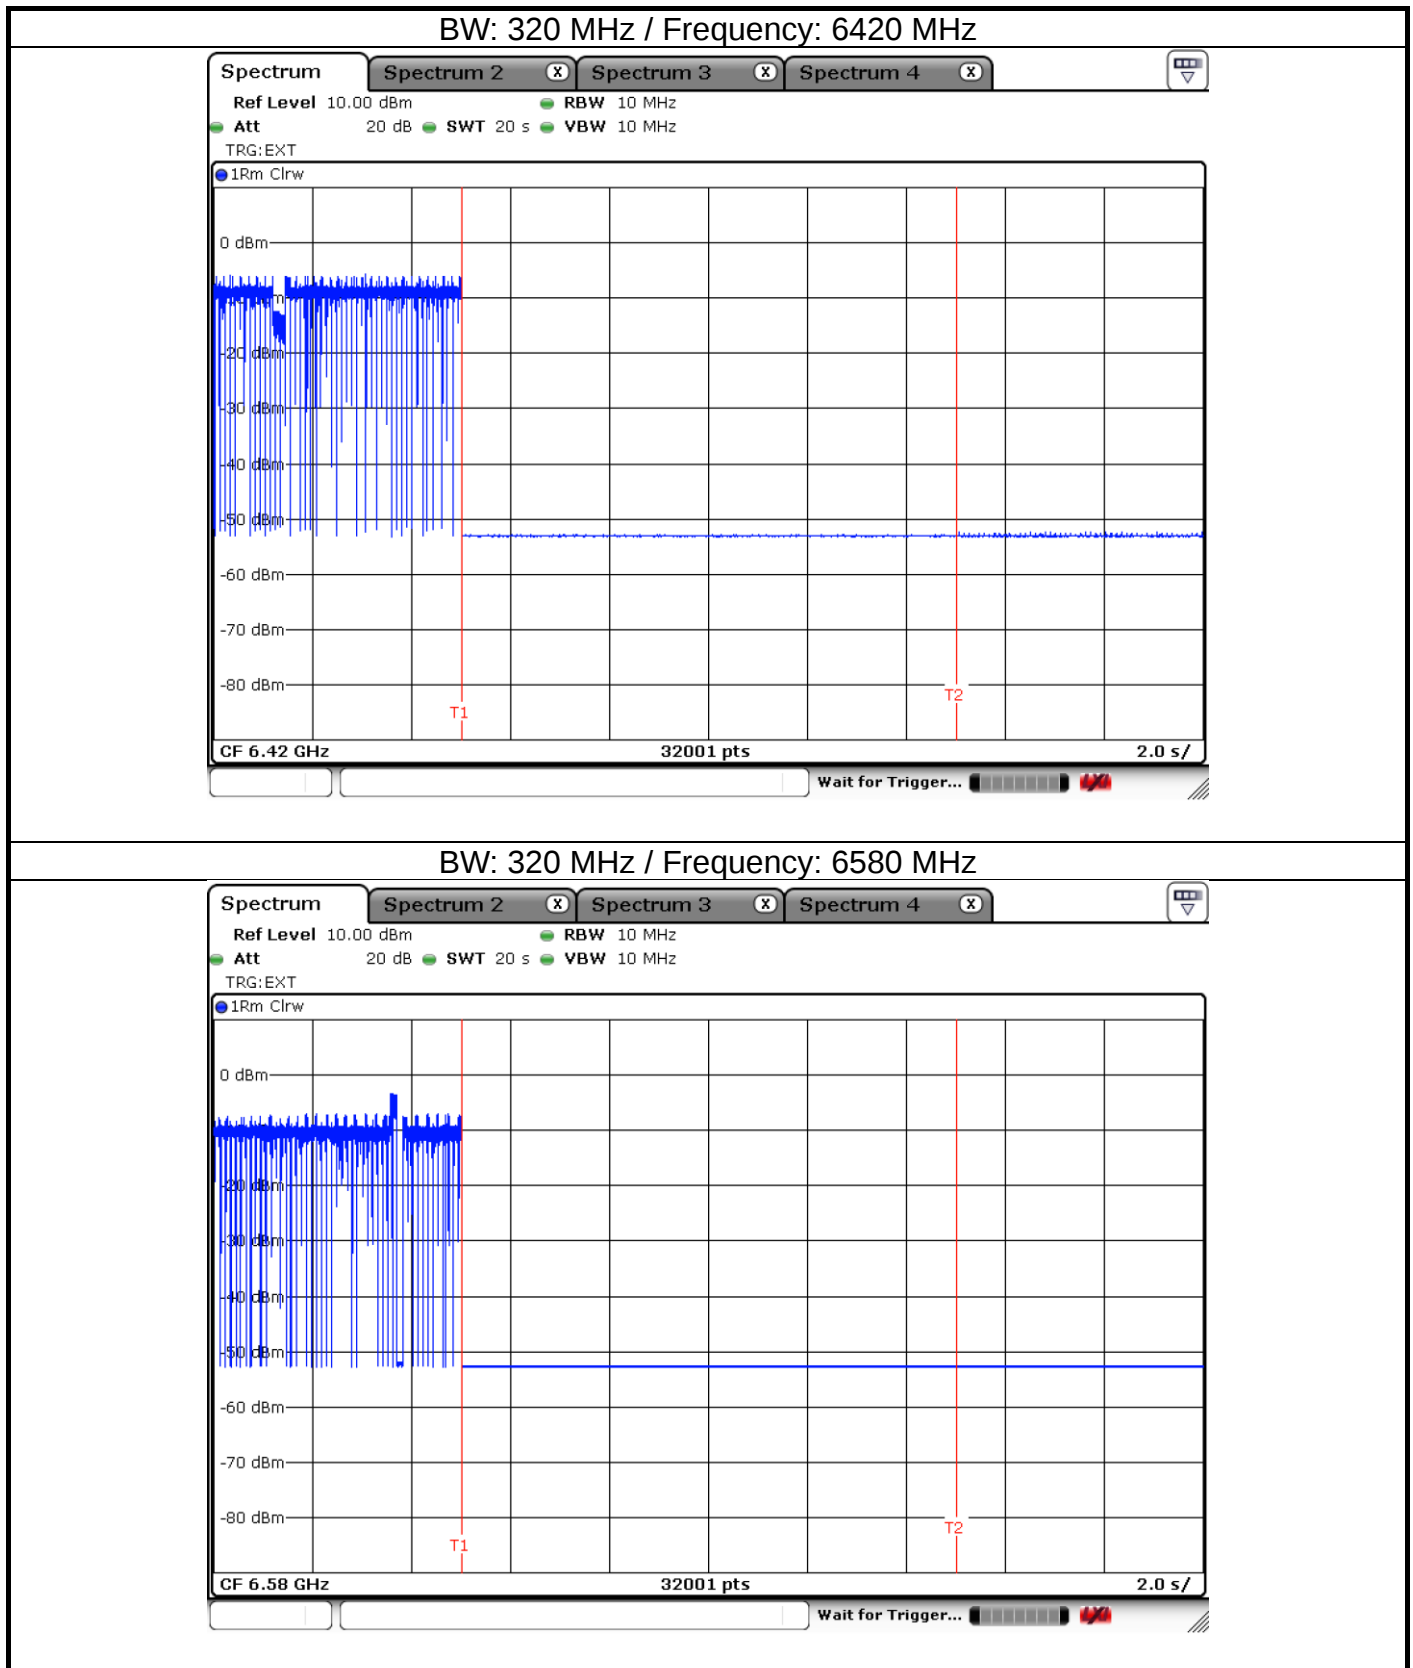

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

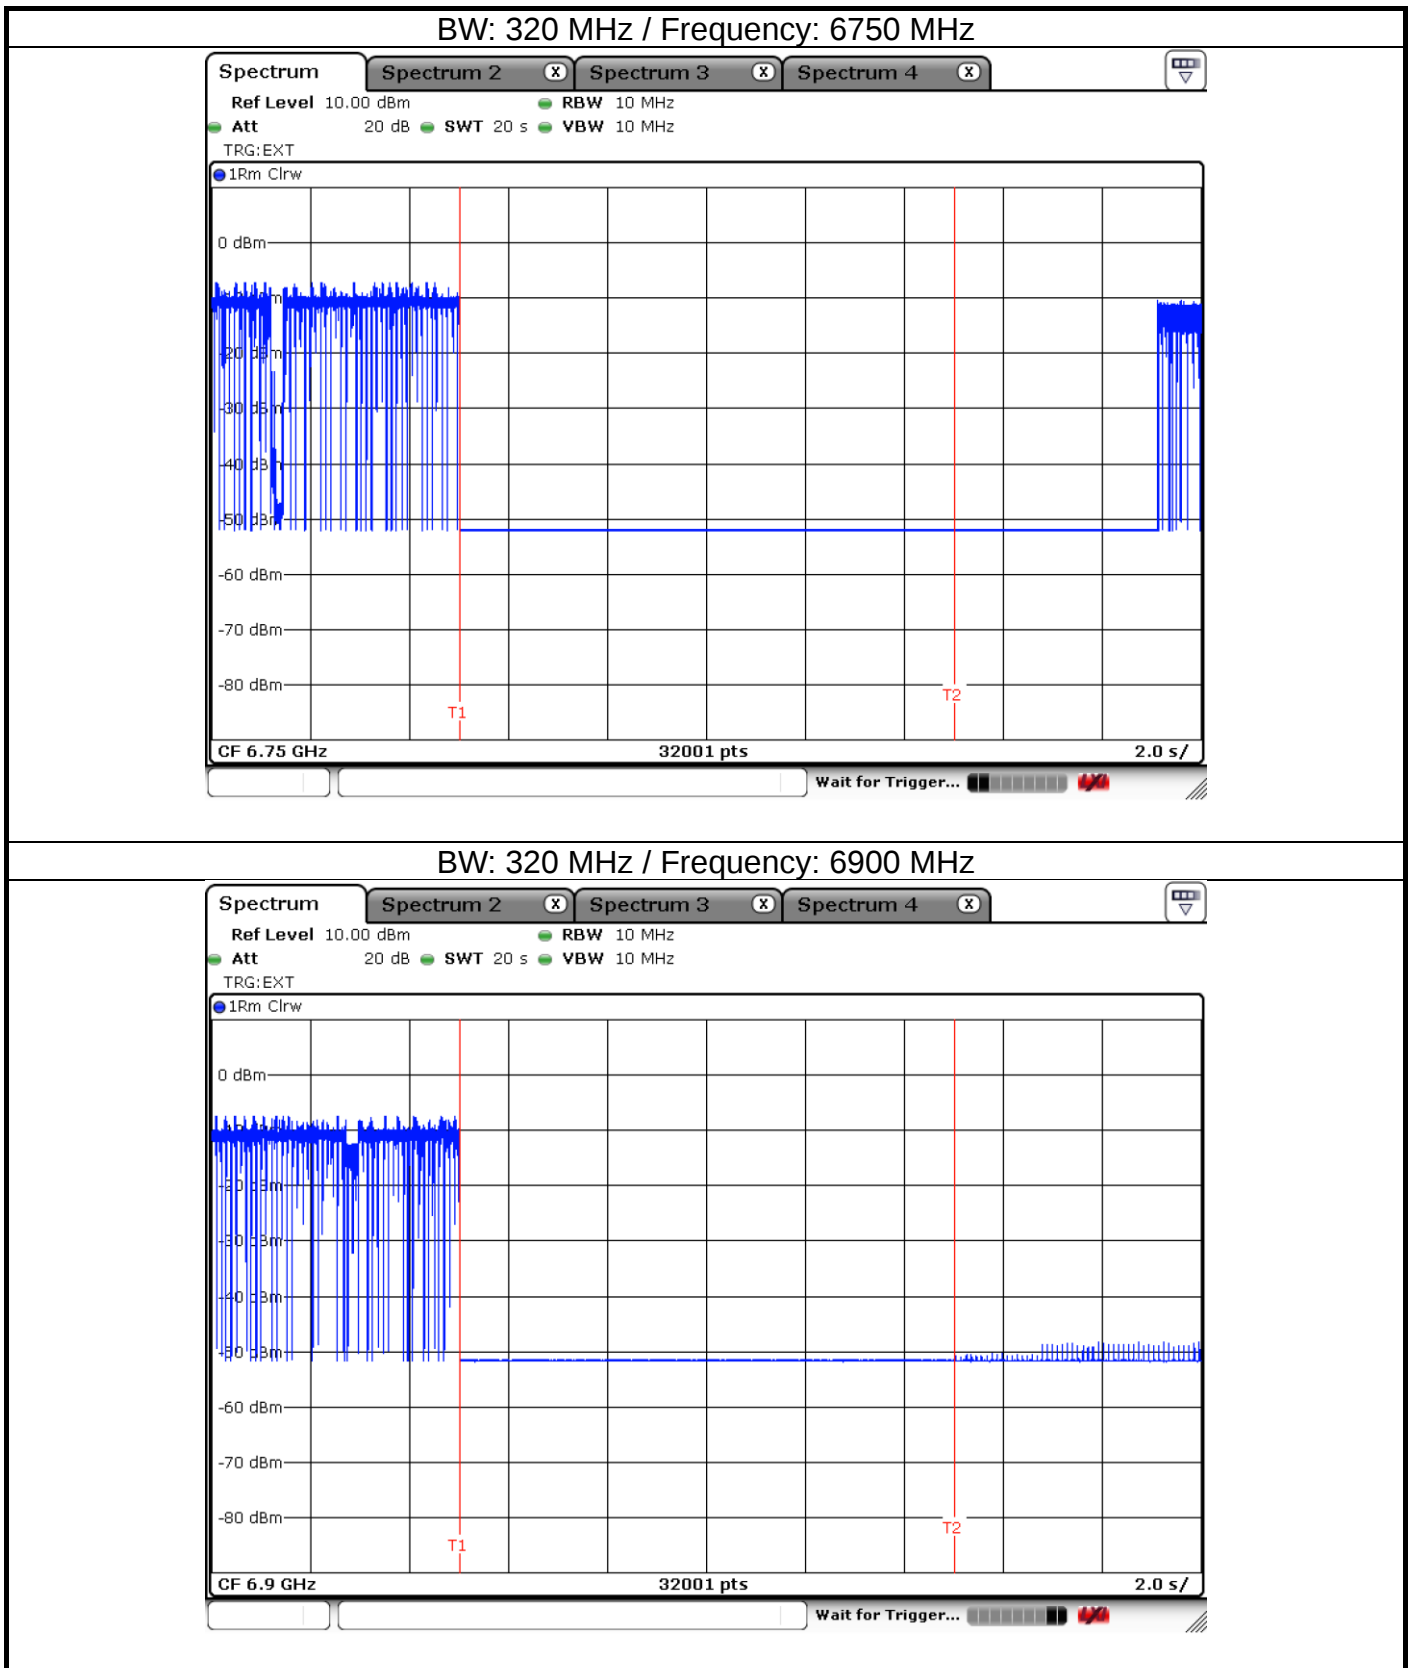

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

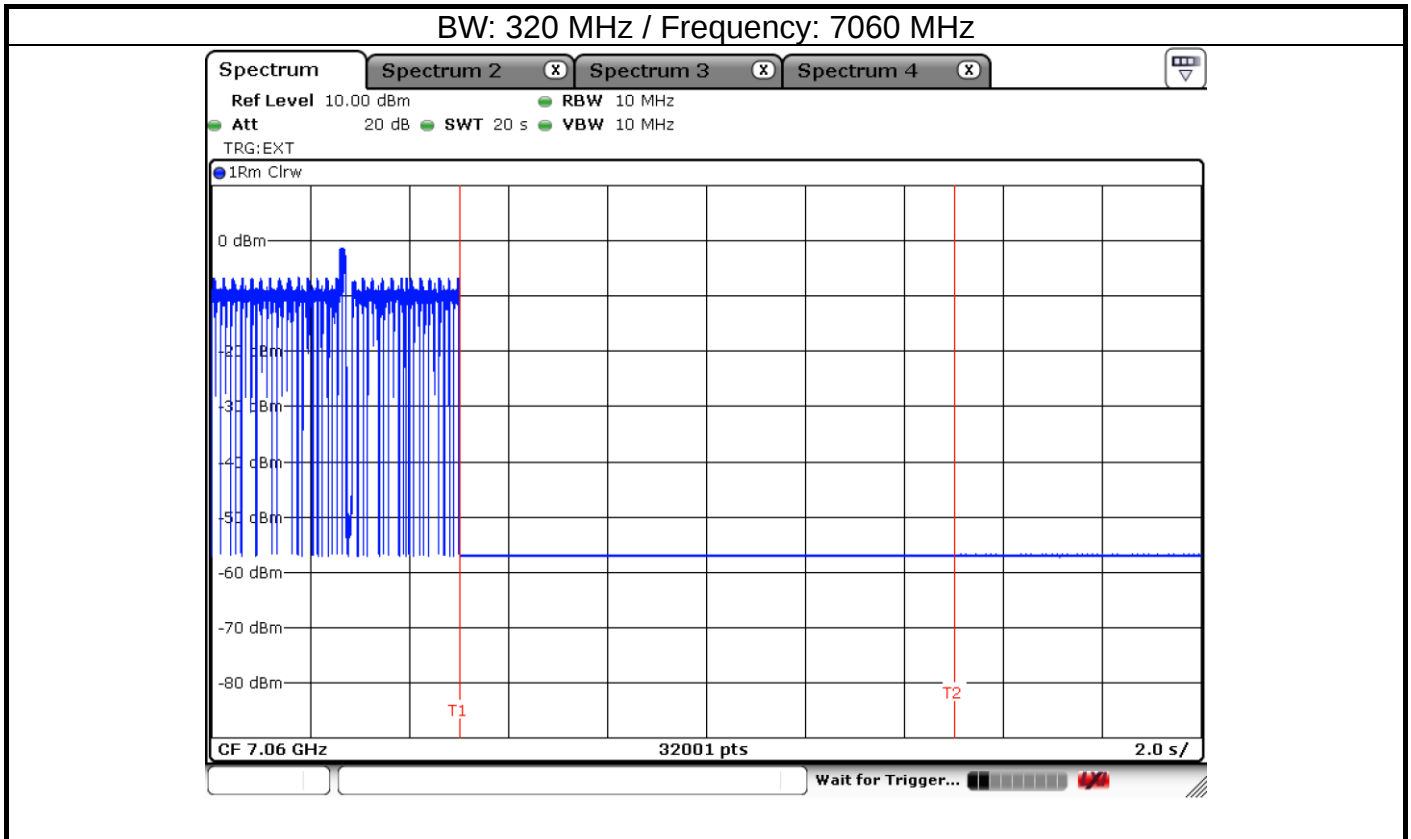

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.




Modulation Mode	be EHT160	Test Freq. (MHz)	6185
Power Phase	Line		

Test by : Sean Yu

Temperature: 26°C

Humidity: 61%

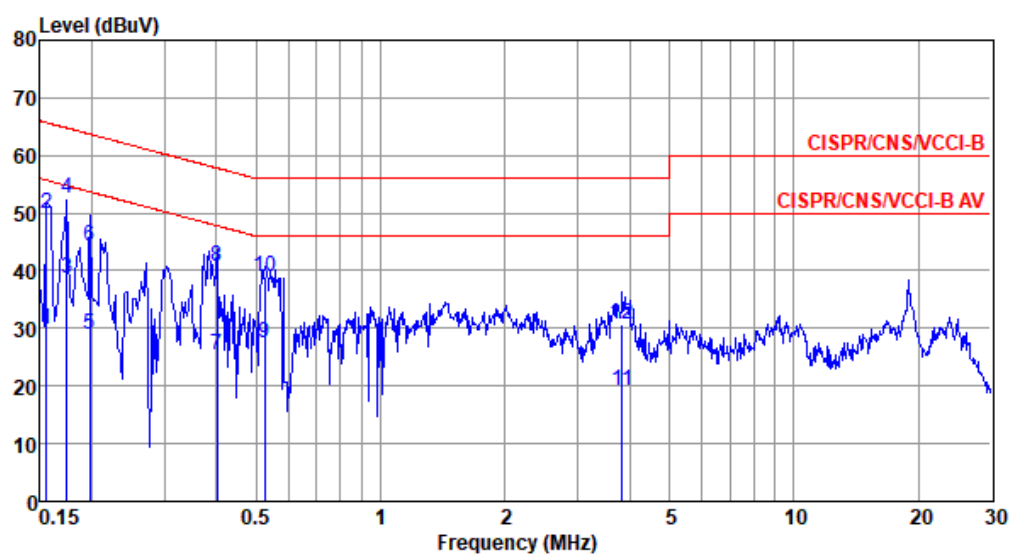

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.156	29.94	55.69	-25.75	19.99	9.65	0.08	0.22	Average
2	0.156	49.81	65.69	-15.88	39.86	9.65	0.08	0.22	QP
3	0.174	38.63	54.77	-16.14	28.66	9.65	0.08	0.24	Average
4*	0.174	52.46	64.77	-12.31	42.49	9.65	0.08	0.24	QP
5	0.198	28.82	53.71	-24.89	18.83	9.65	0.08	0.26	Average
6	0.198	44.40	63.71	-19.31	34.41	9.65	0.08	0.26	QP
7	0.402	25.49	47.81	-22.32	15.44	9.64	0.09	0.32	Average
8	0.402	40.84	57.81	-16.97	30.79	9.64	0.09	0.32	QP
9	0.524	27.49	46.00	-18.51	17.42	9.64	0.09	0.34	Average
10	0.524	38.92	56.00	-17.08	28.85	9.64	0.09	0.34	QP
11	3.840	19.12	46.00	-26.88	8.75	9.67	0.22	0.48	Average
12	3.840	30.60	56.00	-25.40	20.23	9.67	0.22	0.48	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).




Modulation Mode	be EHT160	Test Freq. (MHz)	6185
Power Phase	Neutral		

Test by : Sean Yu

Temperature: 26°C

Humidity: 61%

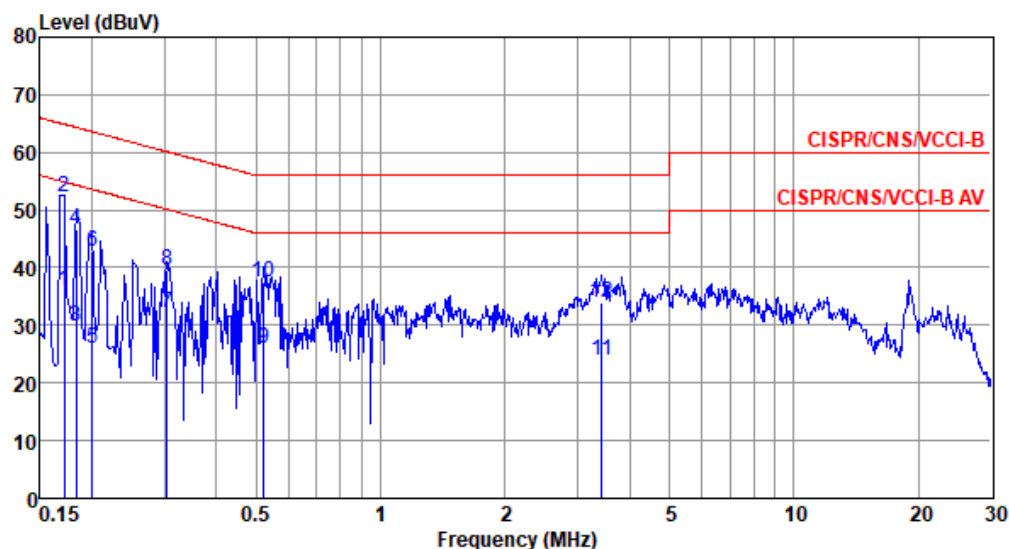

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.171	35.97	54.90	-18.93	26.06	9.66	0.08	0.17	Average
2*	0.171	52.38	64.90	-12.52	42.47	9.66	0.08	0.17	QP
3	0.183	29.75	54.33	-24.58	19.84	9.65	0.08	0.18	Average
4	0.183	46.72	64.33	-17.61	36.81	9.65	0.08	0.18	QP
5	0.201	25.87	53.58	-27.71	15.94	9.65	0.08	0.20	Average
6	0.201	42.76	63.58	-20.82	32.83	9.65	0.08	0.20	QP
7	0.303	32.20	50.15	-17.95	22.23	9.64	0.09	0.24	Average
8	0.303	39.55	60.15	-20.60	29.58	9.64	0.09	0.24	QP
9	0.521	25.88	46.00	-20.12	15.86	9.64	0.09	0.29	Average
10	0.521	37.58	56.00	-18.42	27.56	9.64	0.09	0.29	QP
11	3.436	24.02	46.00	-21.98	13.67	9.68	0.21	0.46	Average
12	3.436	33.98	56.00	-22.02	23.63	9.68	0.21	0.46	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).