Photographs of EUT

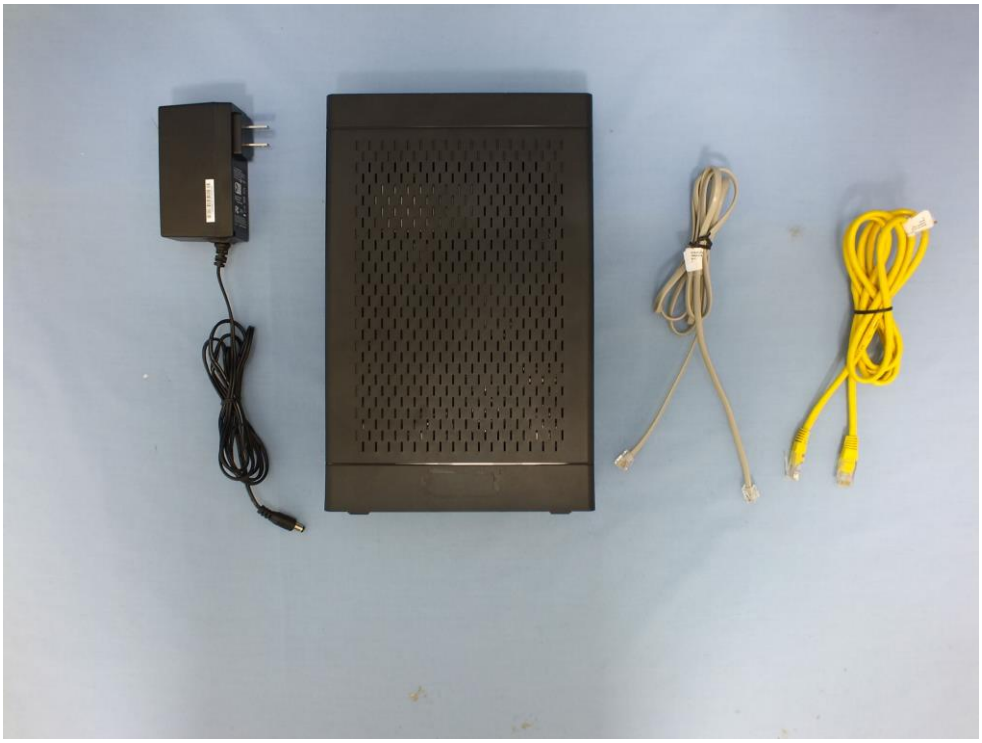

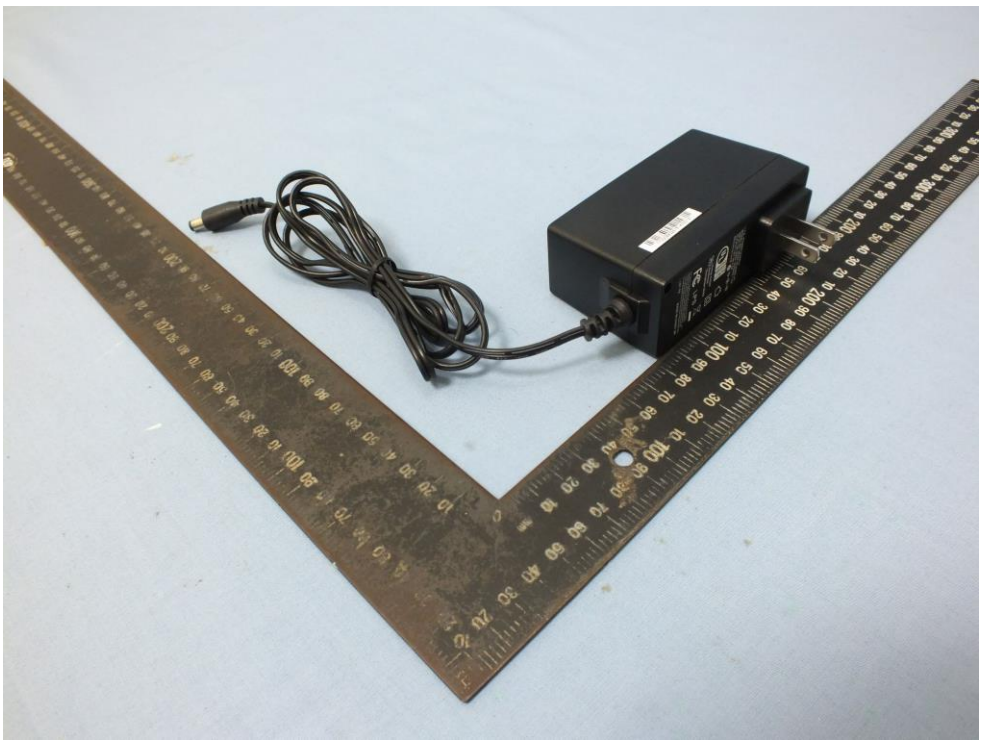

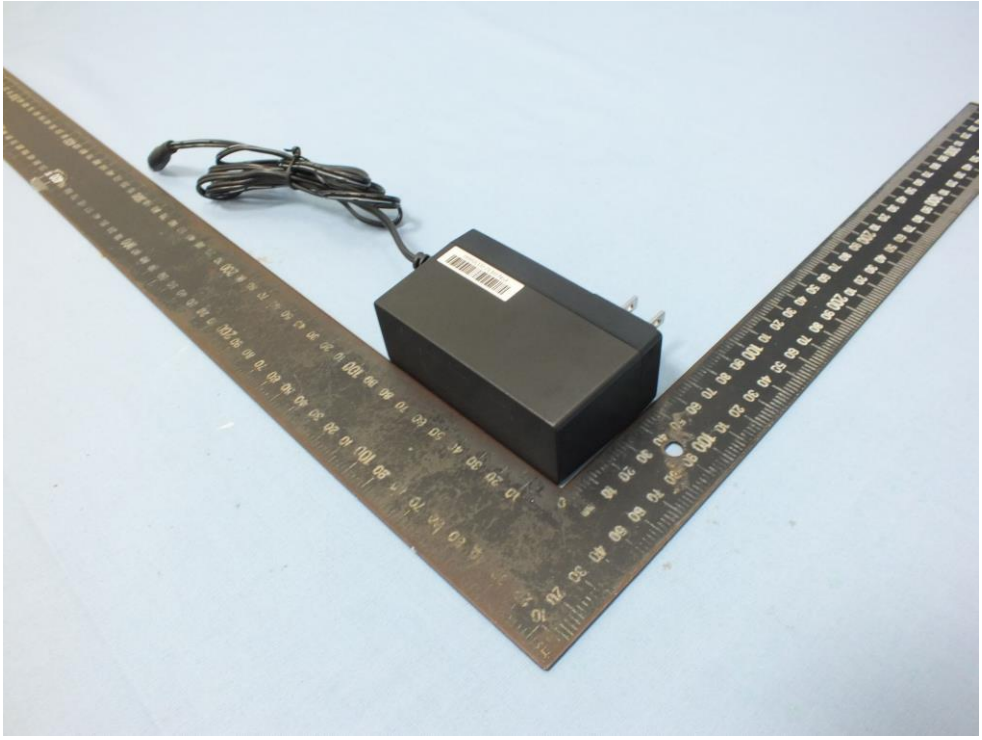

I.T.E. POWER SUPPLY
MODEL NO.:MU42-3120350-A1
INPUT:100-240V~ 50/60Hz 1.5A
OUTPUT:12V 3.5A
Efficiency Level: VI
CERTIFIED
SAFETY US-CA
E138754
Energy Verified
Rendement
Énergétique Vérifié
LPS
This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1)This device may not cause harmful interference, and
(2)this device must accept any interference received,
including interference that may cause undesired operation.
LEI F6
MADE IN CHINA BP

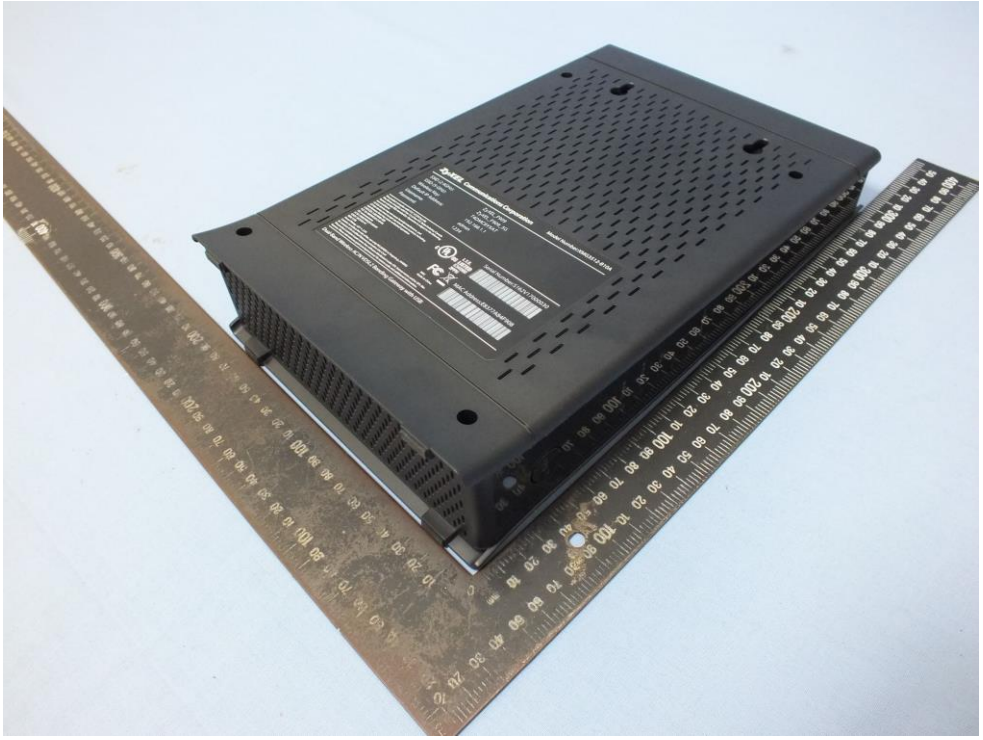

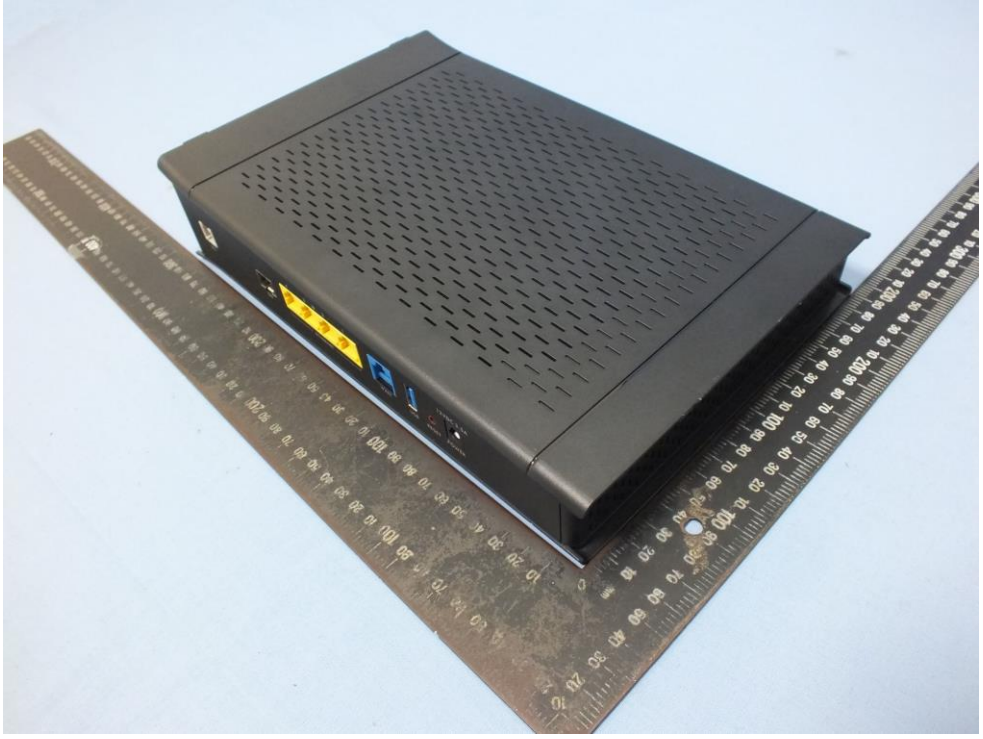

ZyXEL Communications Corporation
Model Number:XMG3512-B10A
SSID (2.4GHz): ZyXEL_F909
SSID (5-GHz): ZyXEL_F909_5G
Wireless Key: T4DMC8YXAT
Default IP Address: 192.168.1.1
Username: admin
Password: 1234
This product complies with FCC 47CFR Part 68.
This device complies with Part 15 of the FCC Rules/Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.
CAN ICES-3 (B)/NMB-3(B)
FCC ID: IBBXMG3512-B10A
US: XXXXXXXXXXXX
IC ID: 2468CXMG3512B10A
USOC JACK:RJ11C
REN: X.XB
Power Rating: 12V ⎓ 3.5A
Caution: to reduce the risk of fire, use only NO.26AWG or larger(e.g.,24AWG)
UL Listed or CSA Certified Telecommunication Line Cord
This product contains in part some free software distributed under GPL license terms and/or GPL like licenses. Please visit www.us.zyxel.com/opensource/ for source code and additional information.
I.T.E.
LISTED
E345980
3PPH
M02
Made in China
Serial Number:S162V17000030
MAC Address:E8377A84F908
Dual-Band Wireless AC/N VDSL2 Bonding Gateway with USB

DSL
SFP
4
3
2
1
ETHERNET
WAN
USB
RESET
12VDC 3.5A
POWER