

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT**INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT
AND INDUSTRY CANADA RSS-210**

OF

Product Name: Inspire S2 Wireless

Brand Name: Creative

Model Name: MF0390

Model Difference: N/A

IC: 2315A-MF0390

FCC ID: IBAMF0390

Report No.: EF/2009/80002

Issue Date: Aug. 26, 2009

Rule Part: FCC Part §15.247, DSS
RSS-210 issue 7:2007, Annex 8

Prepared for: Creative Labs Inc
1901 McCarthy Blvd, Milpitas , California 95035 ,
United States

Prepared by: SGS Taiwan Ltd.
Electronics & Communication Laboratory
No. 134, Wu Kung Rd., Wuku Industrial Zone,
Taipei County, Taiwan.



Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms_and_conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgsonsite.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.

CERTIFICATION OF COMPLIANCE

Applicant: Creative Labs Inc
1901 McCarthy Blvd, Milpitas , California 95035 , United States

Manufacturer: Guoguang Electric Co., Ltd. (Factory)
No. 8 Jinghu Road, Xinhua Street, Huadu Reg, Guangzhou, 510800,
P.R. China Country: P.R. China

Product Name: Inspire S2 Wireless

Brand Name: Creative

IC: 2315A-MF0390

FCC ID: IBAMF0390

Model No.: MF0390

Model Difference: N/A

File Number: EF/2009/80002

Date of test: Aug. 13, 2009 ~ Aug 24, 2009

Date of EUT Received: Aug. 13, 2009

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and RSS-Gen. issue 2:2007, the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15C:2007, §15.247 and RSS-210 issue 7: 2007 Annex 8.

The test results of this report relate only to the tested sample identified in this report.

Test By:

Jason Wu

Date:

Aug. 26, 2009

Jason Wu / Asst. Supervisor

Prepared By:

Alex Hsieh

Date:

Aug. 26, 2009

Alex Hsieh / Sr. Engineer

Approved By:

Vincent Su

Date:

Aug. 26, 2009

Vincent Su / Manager

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms_and_conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgsonsite.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.

Version

| Version No. | Date | Description |
|-------------|---------------|------------------------------|
| 00 | Aug. 26, 2009 | Initial creation of document |
| | | |
| | | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms_and_conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgsonsite.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.

Table of Contents

| | |
|--|-----------|
| 1. GENERAL INFORMATION | 7 |
| 1.1. Product Description | 7 |
| 1.2. Related Submittal(s) / Grant (s) | 8 |
| 1.3. Test Methodology | 8 |
| 1.4. Test Facility | 8 |
| 1.5. Special Accessories | 8 |
| 1.6. Equipment Modifications | 8 |
| 2. SYSTEM TEST CONFIGURATION | 9 |
| 2.1. EUT Configuration | 9 |
| 2.2. EUT Exercise | 9 |
| 2.3. Test Procedure | 9 |
| 2.4. Configuration of Tested System | 10 |
| 3. SUMMARY OF TEST RESULTS | 11 |
| 4. DESCRIPTION OF TEST MODES | 11 |
| 5. AC POWER LINE CONDUCTED EMISSION TEST | 12 |
| 5.1. Standard Applicable: | 12 |
| 5.2. Measurement Equipment Used: | 12 |
| 5.3. EUT Setup: | 12 |
| 5.4. Measurement Procedure: | 13 |
| 5.5. Measurement Result: | 13 |
| 6. PEAK OUTPUT POWER MEASUREMENT | 16 |
| 6.1. Standard Applicable: | 16 |
| 6.2. Measurement Equipment Used: | 16 |
| 6.3. Test Set-up: | 16 |
| 6.4. Measurement Procedure: | 17 |
| 6.5. Measurement Result: | 18 |
| 7. 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT | 23 |
| 7.1. Standard Applicable: | 23 |
| 7.2. Measurement Equipment Used: | 24 |
| 7.3. Test SET-UP: | 25 |
| 7.4. Measurement Procedure: | 26 |
| 7.5. Field Strength Calculation | 26 |
| 7.6. Measurement Result: | 26 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms_and_conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgsonsite.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.

| | |
|---|-----------|
| 8. SPURIOUS EMISSION TEST | 35 |
| 8.1. Standard Applicable: | 35 |
| 8.2. Measurement Equipment Used: | 35 |
| 8.3. Test SET-UP: | 35 |
| 8.4. Measurement Procedure: | 36 |
| 8.5. Field Strength Calculation | 36 |
| 8.6. Measurement Result: | 36 |
| 9. FREQUENCY SEPARATION | 61 |
| 9.1. Standard Applicable: | 61 |
| 9.2. Measurement Equipment Used: | 61 |
| 9.3. Test Set-up: | 61 |
| 9.4. Measurement Procedure: | 61 |
| 9.5. Measurement Result: | 61 |
| 10. NUMBER OF HOPPING FREQUENCY | 63 |
| 10.1. Standard Applicable: | 63 |
| 10.2. Measurement Equipment Used: | 63 |
| 10.3. Test Set-up: | 63 |
| 10.4. Measurement Procedure: | 63 |
| 10.5. Measurement Result: | 63 |
| 11. TIME OF OCCUPANCY (DWELL TIME) | 65 |
| 11.1. Standard Applicable: | 65 |
| 11.2. Measurement Equipment Used: | 65 |
| 11.3. Test Set-up: | 65 |
| 11.4. Measurement Procedure: | 65 |
| 11.5. Measurement Result: | 66 |
| 12. 20dB Bandwidth..... | 72 |
| 12.1. Standard Applicable: | 72 |
| 12.2. Measurement Equipment Used: | 72 |
| 12.3. Test Set-up: | 72 |
| 12.4. Measurement Procedure: | 72 |
| 12.5. Measurement Result: | 73 |
| 13. ANTENNA REQUIREMENT | 78 |
| 13.1. Standard Applicable: | 78 |
| 13.2. Antenna Connected Construction: | 78 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms_and_conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgsonsite.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.

| | |
|--|-----------|
| 14. 99% Bandwidth Measurement | 79 |
| 14.1. Standard Applicable: | 79 |
| 14.2. Measurement Equipment Used: | 79 |
| 14.3. Test Set-up: | 79 |
| 14.4. Measurement Procedure: | 79 |
| 14.5. Measurement Result: | 80 |

1. GENERAL INFORMATION

1.1. Product Description

General:

| | | |
|-------------------|------------------------------|--|
| Product Name: | Inspire S2 Wireless | |
| Brand Name: | Creative | |
| Model Name: | MF0390 | |
| Model Difference: | N/A | |
| Power Supply: | 15Vdc by AC/DC power adapter | |
| | Adapter: | Model: GPE602-150350W(ADC0000005810), Supplier: Golden Profit Electronics Ltd |

Bluetooth:

| | |
|----------------------|---|
| Frequency Range: | 2402 – 2480MHz |
| Bluetooth Version: | <input type="checkbox"/> V1.1 (GFSK) <input type="checkbox"/> V1.2 (GFSK) <input type="checkbox"/> V2.0 (GFSK) <input checked="" type="checkbox"/> V2.0 + EDR (GFSK + $\pi/4$ DQPSK + 8DPSK) <input type="checkbox"/> V2.1 + EDR (GFSK + $\pi/4$ DQPSK + 8DPSK) |
| Channel number: | 79 channels |
| Modulation type: | Frequency Hopping Spread Spectrum |
| Transmit Power: | 3.55 dBm (Peak) |
| Dwell Time: | $\leq 0.4s$ |
| Operating Mode: | Point-to-Point |
| Antenna Designation: | Chip Antenna, -0.7dBi. |
| Type of Emission: | 1M26FXD |

This test report applies for BT.

1.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: IBAMF0390** filing to comply with Section 15.247 of the FCC Part 15C, Subpart C Rules. And **IC: 2315A-MF0390** filing to comply with Industry Canada RSS-210 issue 7: 2007 Annex 8.

1.3. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003) and RSS-Gen: 2007. Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4. Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number are: 990257 and 236194, Canada Registration Number: 4620A-1.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 & 10 meters) and FCC Registration Number: 94644.

1.5. Special Accessories

Not available for this EUT intended for grant.

1.6. Equipment Modifications

Not available for this EUT intended for grant.

2. SYSTEM TEST CONFIGURATION

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The Creative was tested with a test program to fix the Tx/RX frequency that was for the purpose of the measurements. For more information please see test data and APPENDIX 1 for set-up photographs.

2.3. Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 7, 13 of ANSI C63.4-2003 and RSS-Gen:2007, Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 of ANSI C63.4-2003.

2.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System (Fixed channel)



Table 2-1 Equipment Used in Tested System

| Item | Equipment | Mfr/Brand | Model/ Type No. | Series No. | Data Cable | Power Cord |
|------|---------------|-------------------|--------------------|--------------|--------------|------------|
| 1 | Notebook | IBM | T43 | L3LHHN6 | N/A | Shielding |
| 2 | Test Kit | N/A | N/A | N/A | Un-Shielding | N/A |
| 3 | Test software | BlueSuite 1.22 | CSR | Version 1.22 | N/A | N/A |

3. SUMMARY OF TEST RESULTS

| FCC Rules | Description Of Test | Result |
|--|--|-----------|
| §15.207(a)/ RSS-Gen §7.2.2 | AC Power line Conducted Emission | Compliant |
| §15.247(b)(1)/ RSS-210 issue 7, §A8.4(2) | Peak Output Power | Compliant |
| §15.247(d) RSS-210 issue 7, §A8.5 | 100 KHz Bandwidth Of Frequency Band Edges | Compliant |
| §15.247(c) RSS-Gen §7.2.3 RSS-210 issue 7, §A2.9 | TX/RX Spurious Emission | Compliant |
| §15.247(a)(1)/ RSS-210 issue 7, §A8.1(b) | Frequency Separation | Compliant |
| §15.247(a)(1)(iii)/ RSS-210 issue 7, §A8.1(d) | Number of hopping frequency | Compliant |
| §15.247(a)(1)(ii)/ RSS-210 issue 7, §A8.1(d) | Time of Occupancy | Compliant |
| §15.247(a)(1) | 20dB Bandwidth | No Limit |
| §15.203, §15.247(c)/ RSS-GEN 7.1.4, RSS-210 issue 7, §A8.4 | Antenna Requirement | Compliant |
| RSS-Gen §4.4.1 | 99% Power Bandwidth | Compliant |

4. DESCRIPTION OF TEST MODES

The EUT has been tested under engineering test condition. Test program was used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low (2402MHz) 、mid (2441MHz) and high (2480MHz) with BDR/EDR modes are chosen for full testing.

5. AC POWER LINE CONDUCTED EMISSION TEST

5.1. Standard Applicable:

According to §15.207 and RSS-Gen §7.2.2, frequency range within 150KHz to 30MHz shall not exceed the Limit table as below.

| Frequency range MHz | Limits dB(uV) | |
|---|------------------|----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |
| Note | | |
| 1.The lower limit shall apply at the transition frequencies | | |
| 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. | | |

5.2. Measurement Equipment Used:

| Conducted Emission Test Site | | | | | |
|------------------------------|------------|-------------------------|------------------|--------------|------------|
| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | CAL DUE. |
| EMI Test Receiver | R&S | ESCS30 | 828985/004 | 09/16/2008 | 09/15/2009 |
| LISN | Rolf-Heine | NNB-2/16Z | 99012 | 02/02/2009 | 02/01/2010 |
| LISN | FCC | FCC-LISN-50/250-25-2-01 | 04034 | 02/02/2009 | 02/01/2010 |
| Coaxial Cables | N/A | WK CE Cable | N/A | 10/30/2008 | 10/29/2009 |

5.3. EUT Setup:

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2003.
2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
3. The LISN was connected with 120Vac/60Hz power source.

5.4. Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.


5.5. Measurement Result:

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Note: Refer to next page for measurement data and plots.

AC POWER LINE CONDUCTED EMISSION TEST DATA

| | | | | | |
|-----------------|---------|-----------|-----|------------|---------------|
| Operation Mode: | BT mode | | | Test Date: | Aug. 23, 2009 |
| Temperature: | 23 °C | Humidity: | 59% | Test By: | Jason |

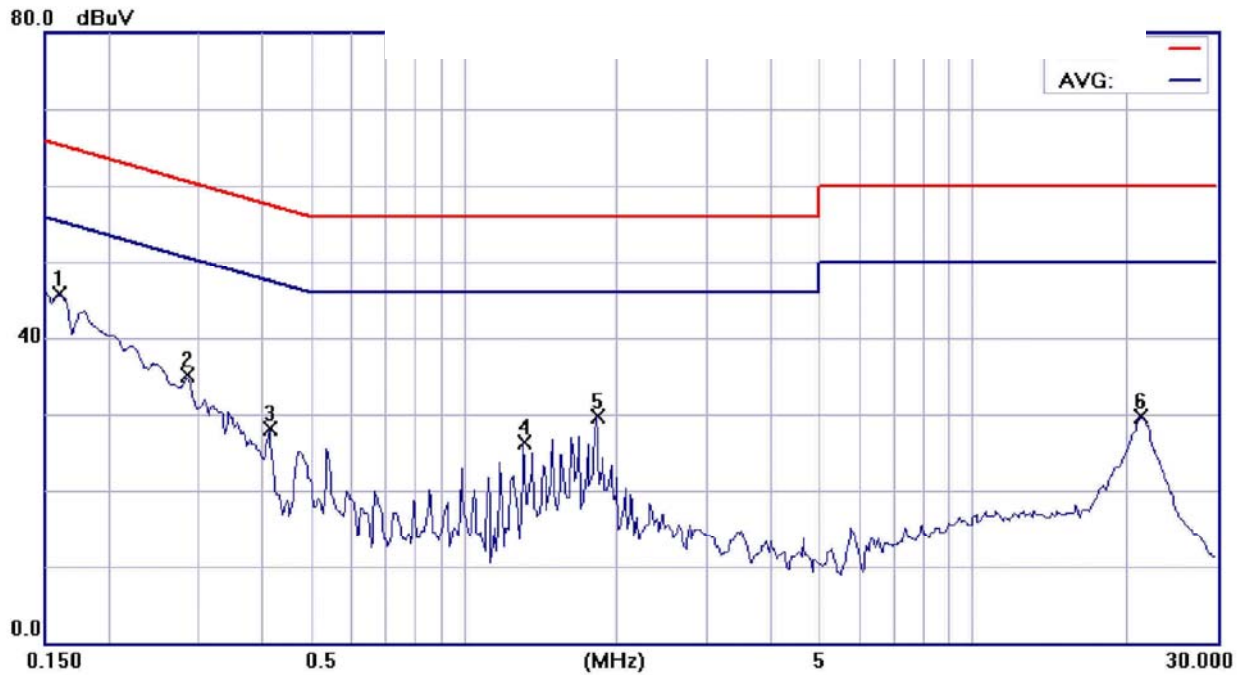

Site SGS CONDUCTED #1

Limit: CISPR22 Class B Conduction(QP)

EUT: Inspire S2 Wireless

M/N: MF 0390

Note: BT MODE PLAY 1KHZ

Phase: L1

Power: AC 120V/60Hz

Distance:


Temperature: 23 °C

Humidity: 59 %

Air Pressure: hpa

| No. | Mk. | Freq. MHz | Reading Level dBuV | Factor dB | Measure- ment dBuV | Limit dBuV | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|--------------|--------------------------|---------------|------------|----------|---------|
| 1 | * | 0.1600 | 45.47 | 0.16 | 45.63 | 65.46 | -19.83 | peak | |
| 2 | | 0.2850 | 34.98 | 0.10 | 35.08 | 60.67 | -25.59 | peak | |
| 3 | | 0.4150 | 27.93 | 0.08 | 28.01 | 57.55 | -29.54 | peak | |
| 4 | | 1.3100 | 26.13 | 0.10 | 26.23 | 56.00 | -29.77 | peak | |
| 5 | | 1.8200 | 29.56 | 0.12 | 29.68 | 56.00 | -26.32 | peak | |
| 6 | | 21.3800 | 29.44 | 0.25 | 29.69 | 60.00 | -30.31 | peak | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms_and_conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.com/site/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.

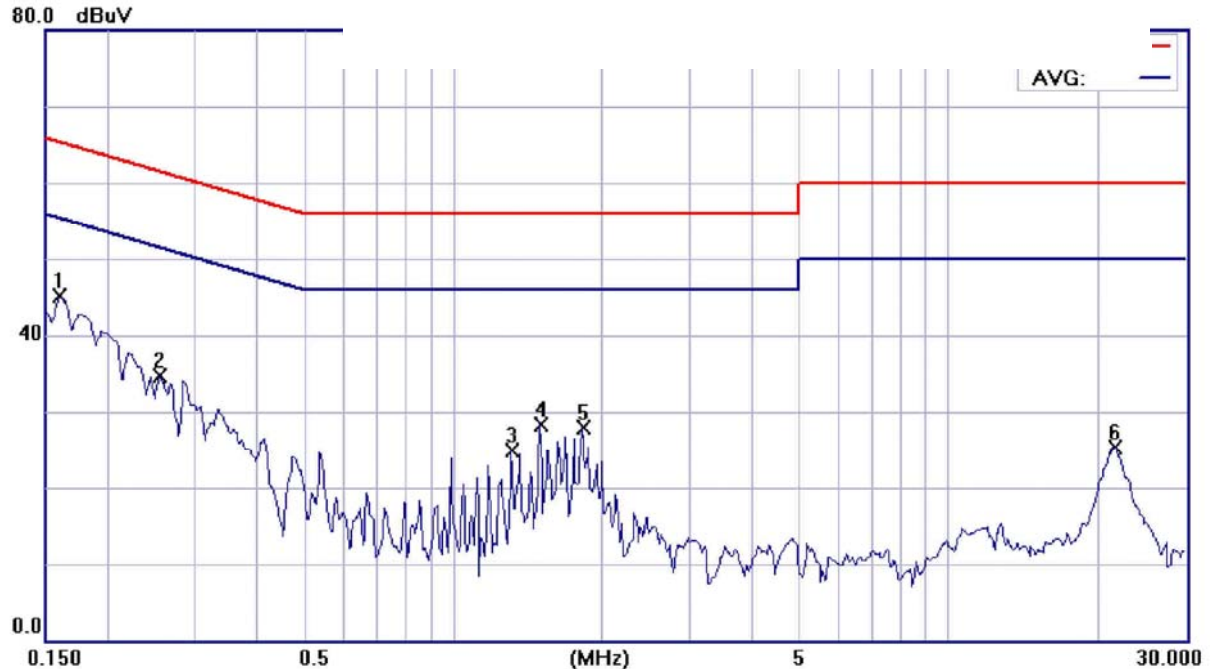

Site SGS CONDUCTED #1

Limit: CISPR22 Class B Conduction(QP)

EUT: Inspire S2 Wireless

M/N: MF 0390

Note: BT MODE PLAY 1KHZ

Phase: **N**

Power: AC 120V/60Hz

Distance:

Temperature: 23 °C

Humidity: 59 %

Air Pressure: hpa

| No. | Mk. | Freq. MHz | Reading Level dBuV | Factor dB | Measure- ment dBuV | Limit dBuV | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|--------------|--------------------------|---------------|------------|----------|---------|
| 1 | * | 0.1600 | 44.99 | 0.18 | 45.17 | 65.46 | -20.29 | peak | |
| 2 | | 0.2550 | 34.67 | 0.13 | 34.80 | 61.59 | -26.79 | peak | |
| 3 | | 1.3100 | 24.84 | 0.13 | 24.97 | 56.00 | -31.03 | peak | |
| 4 | | 1.5000 | 28.10 | 0.14 | 28.24 | 56.00 | -27.76 | peak | |
| 5 | | 1.8200 | 27.71 | 0.14 | 27.85 | 56.00 | -28.15 | peak | |
| 6 | | 21.6600 | 25.11 | 0.26 | 25.37 | 60.00 | -34.63 | peak | |

6. PEAK OUTPUT POWER MEASUREMENT

6.1. Standard Applicable:


According to §15.247(b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1Watt. For all other frequency hopping systems in the 2400 – 2483.5MHz band: 0.125 Watts.

According to RSS-210 issue 7, §A8.4(2), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, the maximum conducted output power shall not exceed 1 W. For all other frequency hopping systems, the maximum peak conducted output power shall not exceed 0.125 W.

6.2. Measurement Equipment Used:

| Conducted Emission Test Site | | | | | |
|------------------------------|--------------|-----------------|---------------|------------|------------|
| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | CAL DUE. |
| Spectrum Analyzer | Agilent | E4446A | MY43360126 | 04/19/2008 | 04/18/2010 |
| Spectrum Analyzer | Agilent | E4440A | MY45304525 | 01/23/2008 | 01/22/2010 |
| DC Block | Agilent | BLK-18 | 155452 | 07/05/2009 | 07/04/2010 |
| Low Loss Cable | HUBER+SUHNER | SUCOFLEX 104PEA | N/A | 01/05/2009 | 01/04/2010 |
| Attenuator | Mini-Circuit | BW-S6W5 | 001 | 07/05/2009 | 07/04/2010 |
| Attenuator | Mini-Circuit | BW-S10W5 | 001 | 07/05/2009 | 07/04/2010 |
| Attenuator | Mini-Circuit | BW-S20W5 | 001 | 07/05/2009 | 07/04/2010 |
| Splitter | Agilent | 11636B | N/A | 07/05/2009 | 07/04/2010 |

6.3. .Test Set-up:

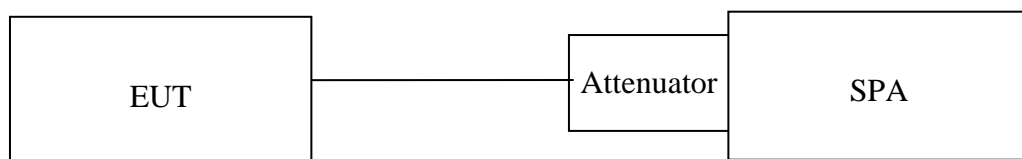

6.4. Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max peak function, BDR :RBW=1MHz ,VBW \geq RBW ,EDR : RBW=1.3MHz ,VBW \geq RBW)
3. Record the max. reading.
4. Repeat above procedures until all frequency measured were complete.

6.5. Measurement Result:**BDR mode:**

| Frequency (MHz) | Reading Power (dBm) | Cable Loss | Output Power (dBm) | Output Power (W) | Limit (W) |
|-----------------|---------------------|------------|--------------------|------------------|-----------|
| 2402.00 | 3.55 | 0.00 | 3.55 | 0.00226 | 1 |
| 2441.00 | 3.00 | 0.00 | 3.00 | 0.00200 | 1 |
| 2480.00 | 2.65 | 0.00 | 2.65 | 0.00184 | 1 |

Note: offset 1dB*EDR mode:**


| Frequency (MHz) | Reading Power (dBm) | Cable Loss | Output Power (dBm) | Output Power (W) | Limit (W) |
|-----------------|---------------------|------------|--------------------|------------------|-----------|
| 2402.00 | 3.54 | 0.00 | 3.54 | 0.00226 | 1 |
| 2441.00 | 2.67 | 0.00 | 2.67 | 0.00185 | 1 |
| 2480.00 | 2.21 | 0.00 | 2.21 | 0.00166 | 1 |

**Note: offset 1dB*


Note: Refer to next page for plots.

BDR Mode

Peak Power Output Data Plot (CH Low)

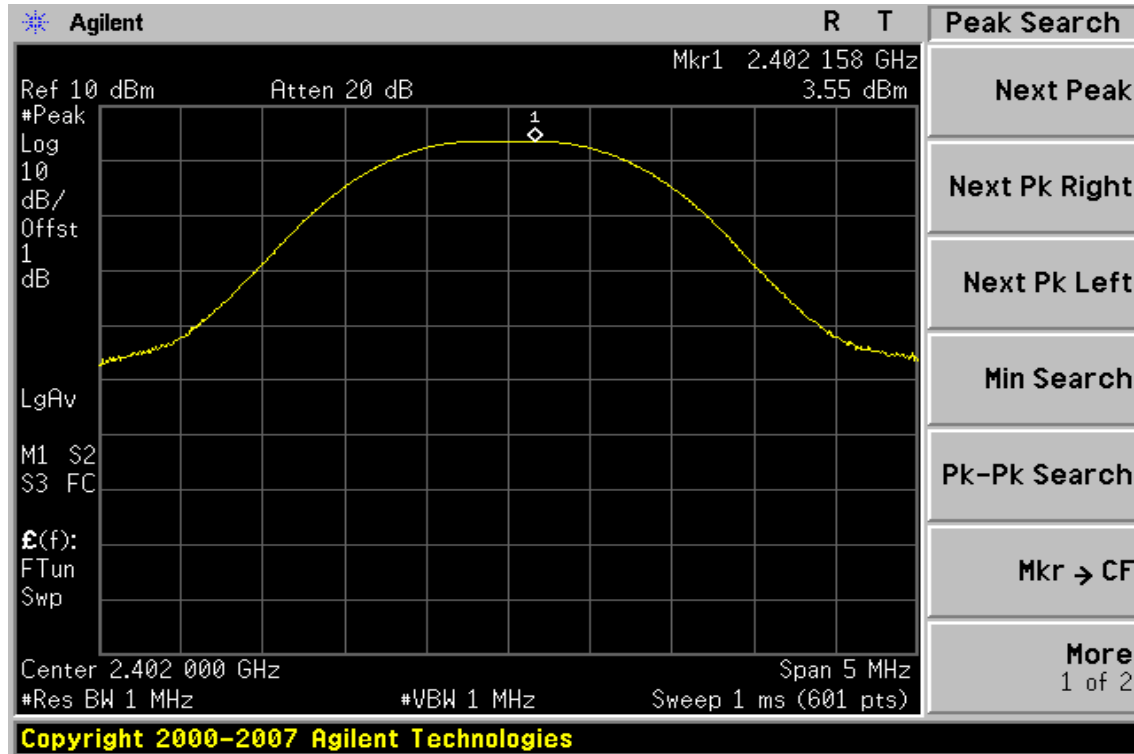


Peak Power Output Data Plot (CH Mid)

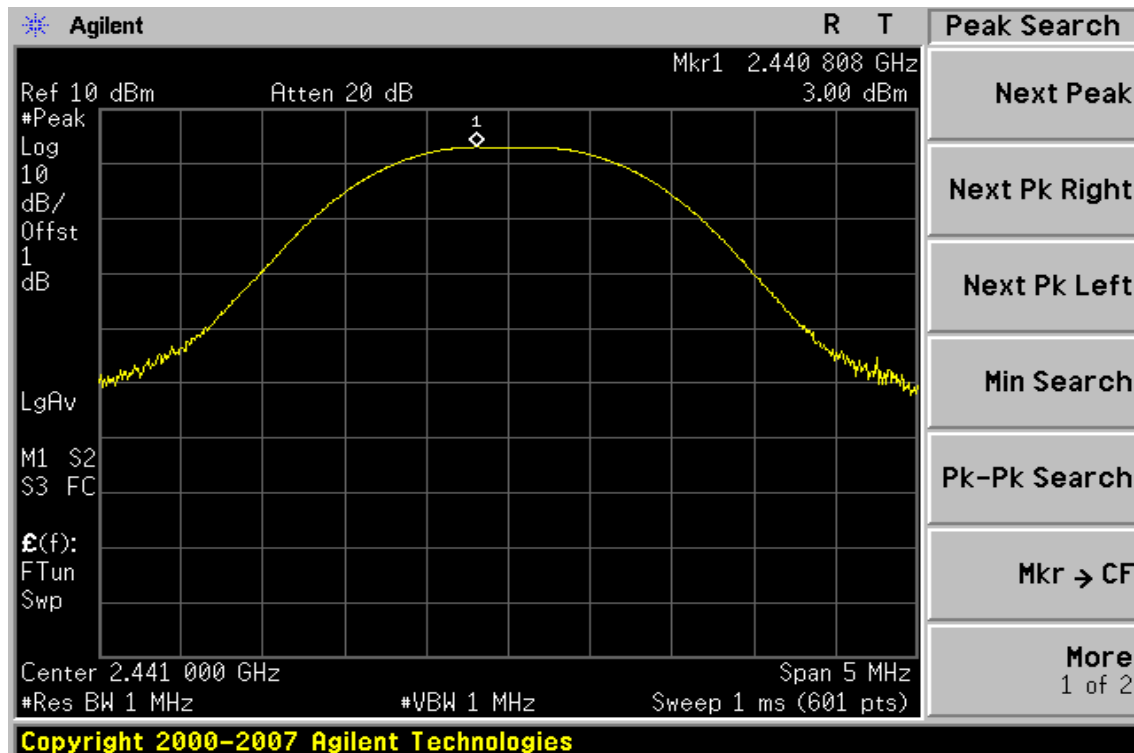

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。


This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms_and_conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.

Peak Power Output Data Plot (CH High)

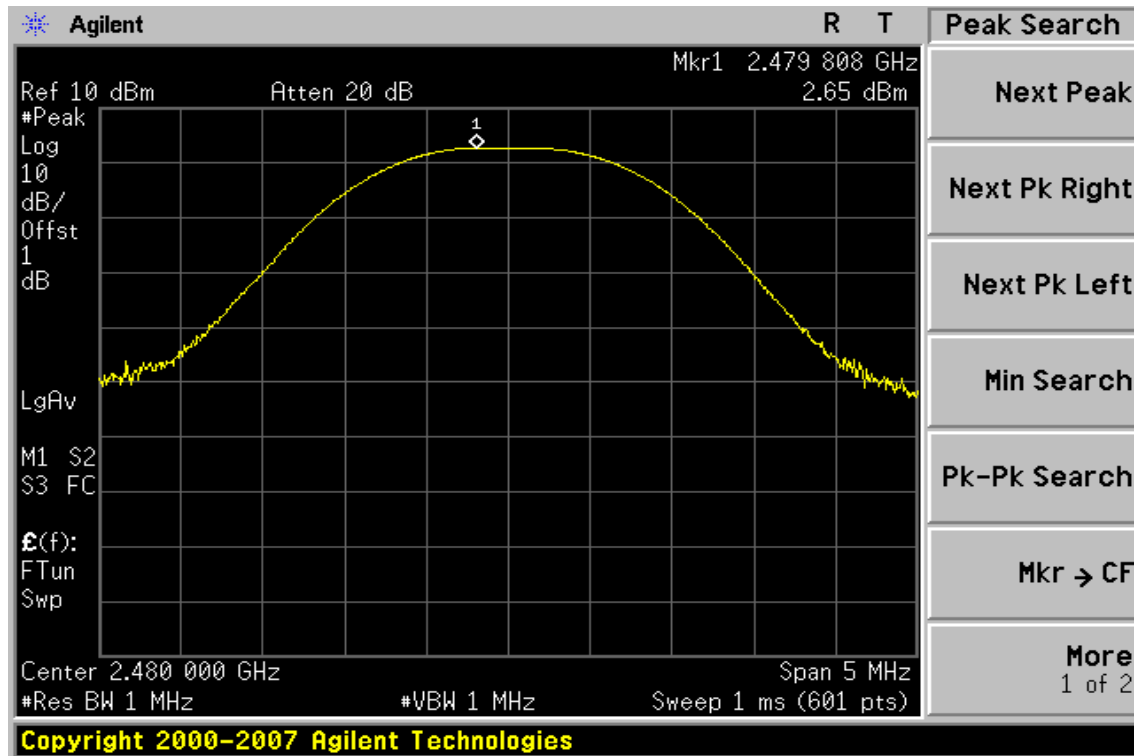


EDR Mode

Peak Power Output Data Plot (CH Low)

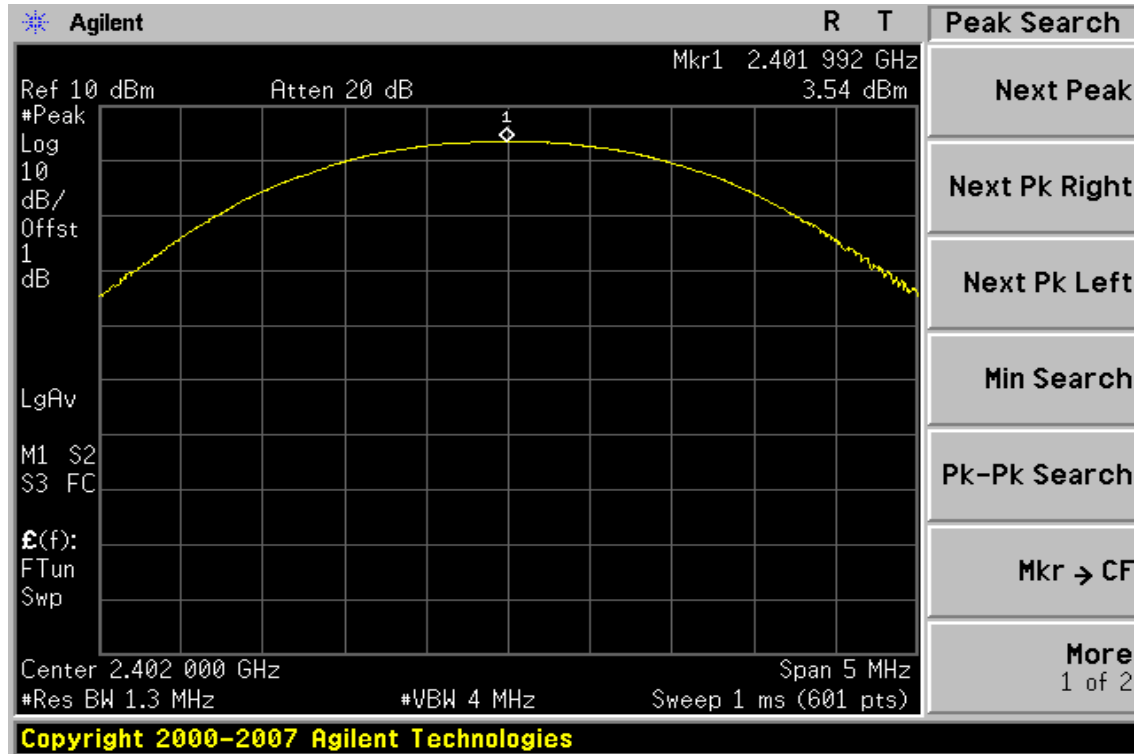


Peak Power Output Data Plot (CH Mid)

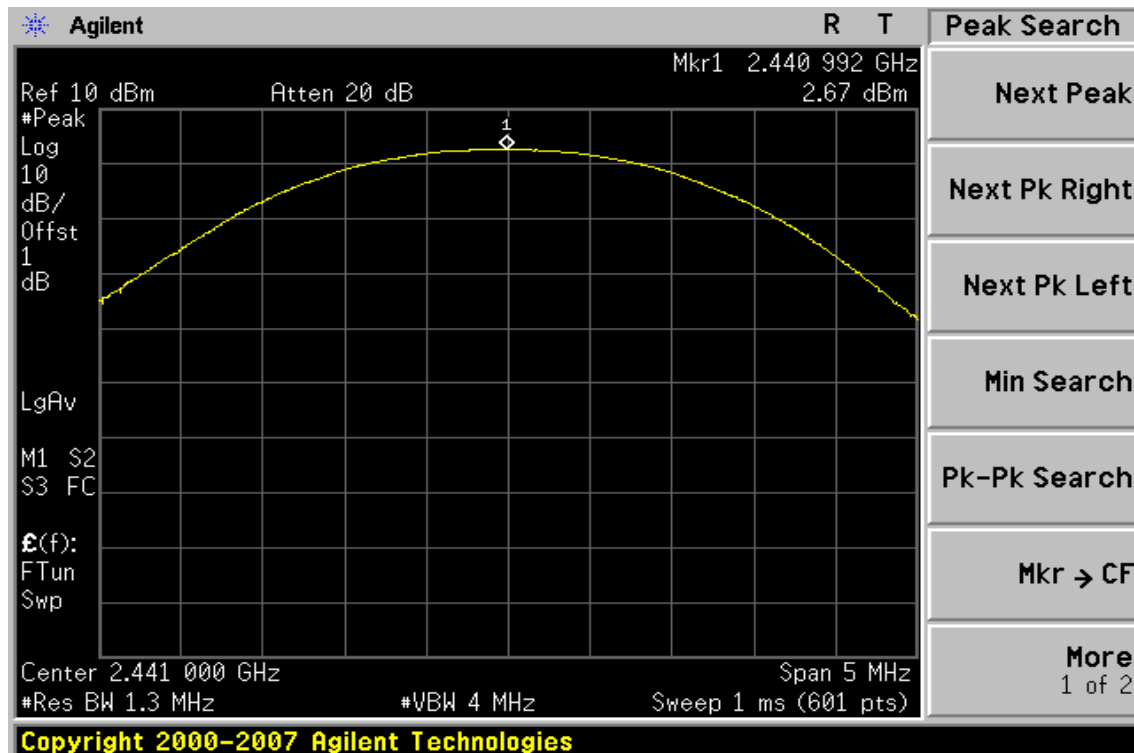

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms_and_conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.

Peak Power Output Data Plot (CH High)

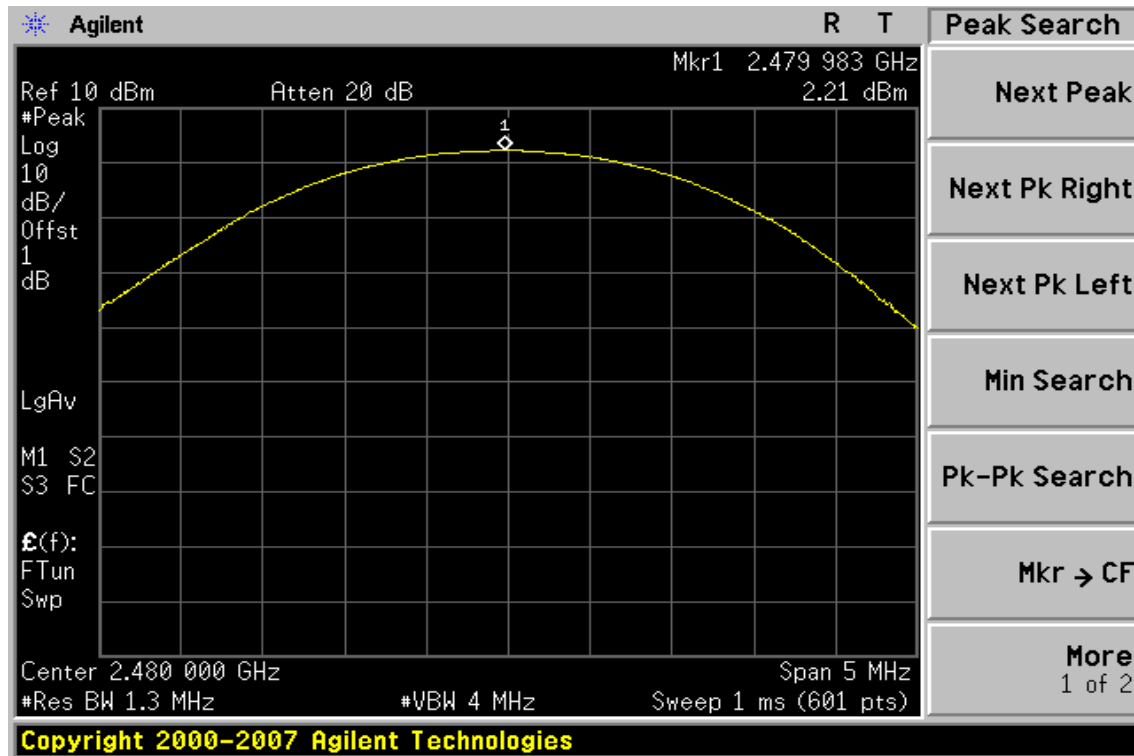

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms_and_conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.com/site/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.

7. 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

7.1. Standard Applicable:

According to §15.247(d), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

According to RSS-210 issue 7, §A8.5, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

7.2. Measurement Equipment Used:

7.2.1. Conducted Emission at antenna port:

Refer to section 6.2 for details.

7.2.2. Radiated emission:

| 966 Chamber | | | | | |
|-------------------|--------------|---------------------|---------------|------------|------------|
| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | CAL DUE. |
| Spectrum Analyzer | R&S | FSP 40 | 100034 | 02/12/2009 | 02/11/2010 |
| Loop antenna | MESSTEC | FLA30 | 03/10086 | 07/08/2009 | 07/07/2011 |
| Bilog Antenna | SCHWAZBECK | VULB9160 | 9160-3136 | 11/15/2008 | 11/14/2009 |
| Horn antenna | SCHWAZBECK | BBHA 9120D | 9120D-673 | 05/09/2008 | 05/08/2010 |
| Pre-Amplifier | Agilent | 8447D | 1937A02834 | 11/30/2008 | 11/29/2009 |
| Pre-Amplifier | Agilent | 8449B | 3008A01973 | 01/05/2009 | 01/04/2010 |
| Turn Table | HD | DT420 | N/A | N.C.R | N.C.R |
| Antenna Tower | HD | MA240-N | 240/657 | N.C.R | N.C.R |
| Controller | HD | HD100 | N/A | N.C.R | N.C.R |
| Low Loss Cable | HUBER+SUHNER | SUCOFLEX 104PEA-10M | 10m | 01/05/2009 | 01/04/2010 |
| Low Loss Cable | HUBER+SUHNER | SUCOFLEX 104PEA-3M | 3m | 01/05/2009 | 01/04/2010 |
| 3m Site | SGS | 966 chamber | N/A | 11/08/2008 | 11/09/2009 |


7.3. Test SET-UP:

7.3.1. Conducted Emission at antenna port:


Refer to section 6.3 for details.

7.3.2. Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

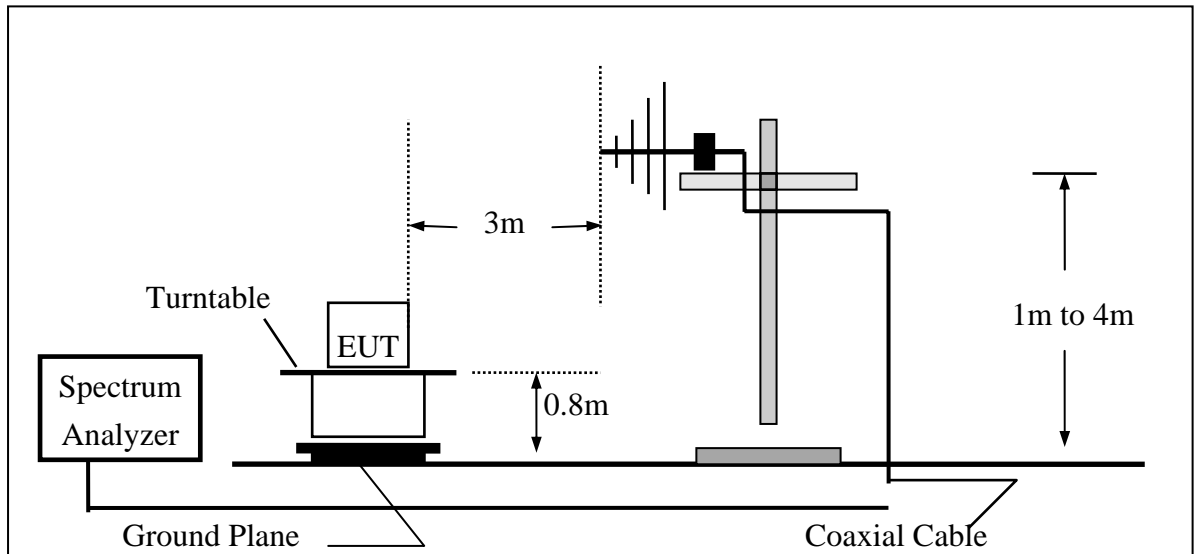

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

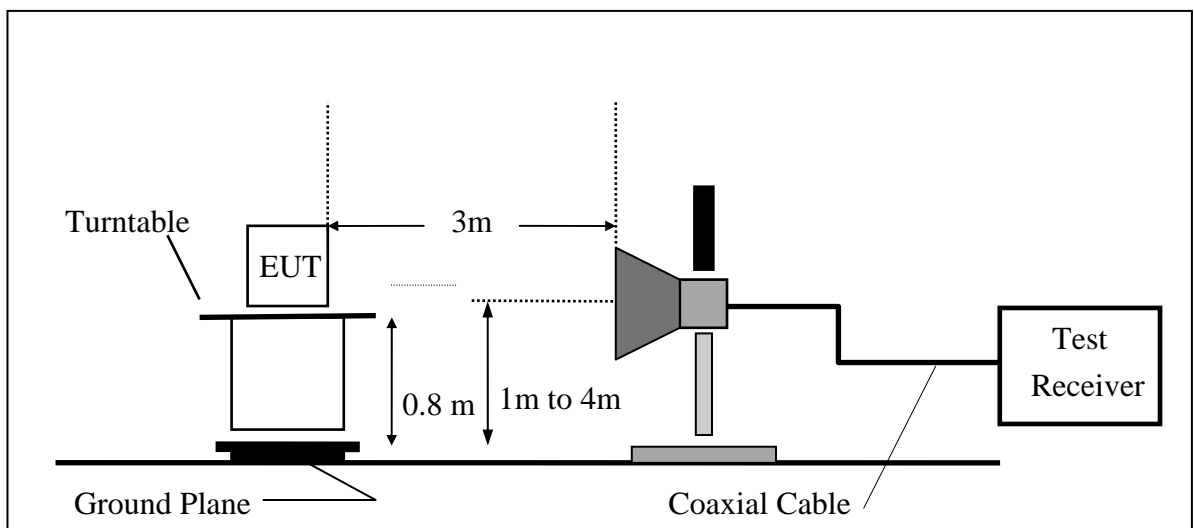

7.4. Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=25MHz, Sweep = auto
5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
6. Repeat above procedures until all frequency measured were complete.

7.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:



$$FS = RA + AF + CL - AG$$

| | | |
|-------|------------------------|--|
| Where | FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| | RA = Reading Amplitude | AG = Amplifier Gain |
| | AF = Antenna Factor | |

7.6. Measurement Result:


Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

BDR Mode Band Edges Test Data CH-Low

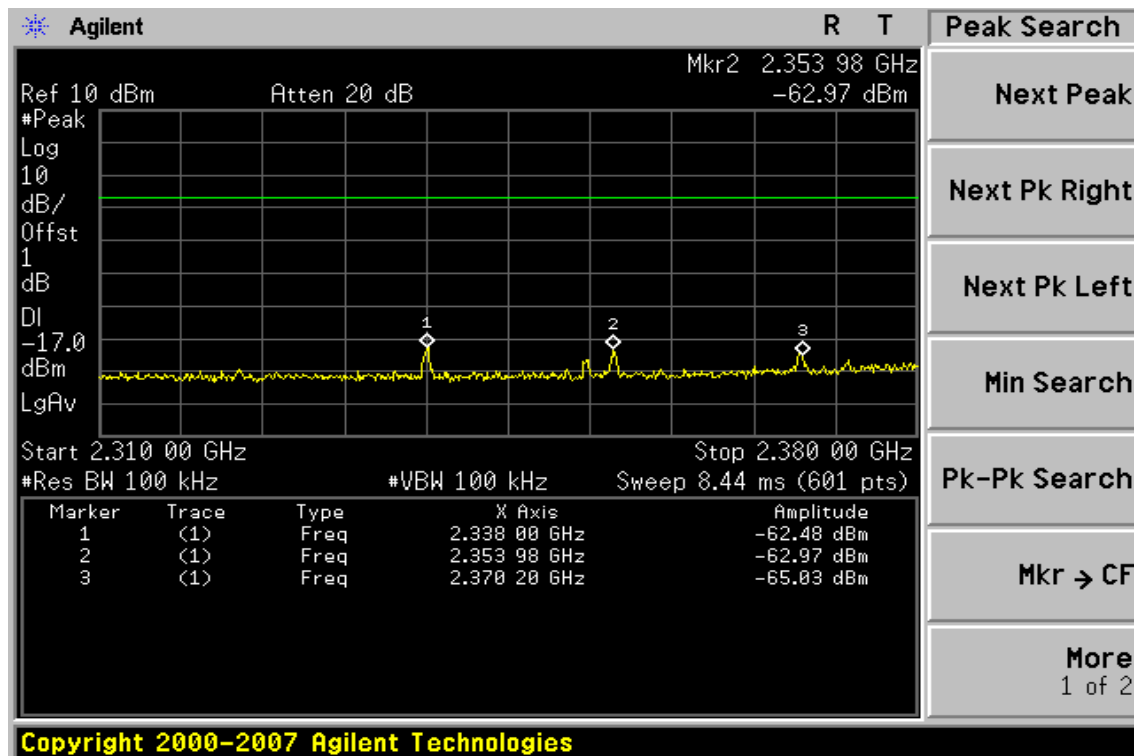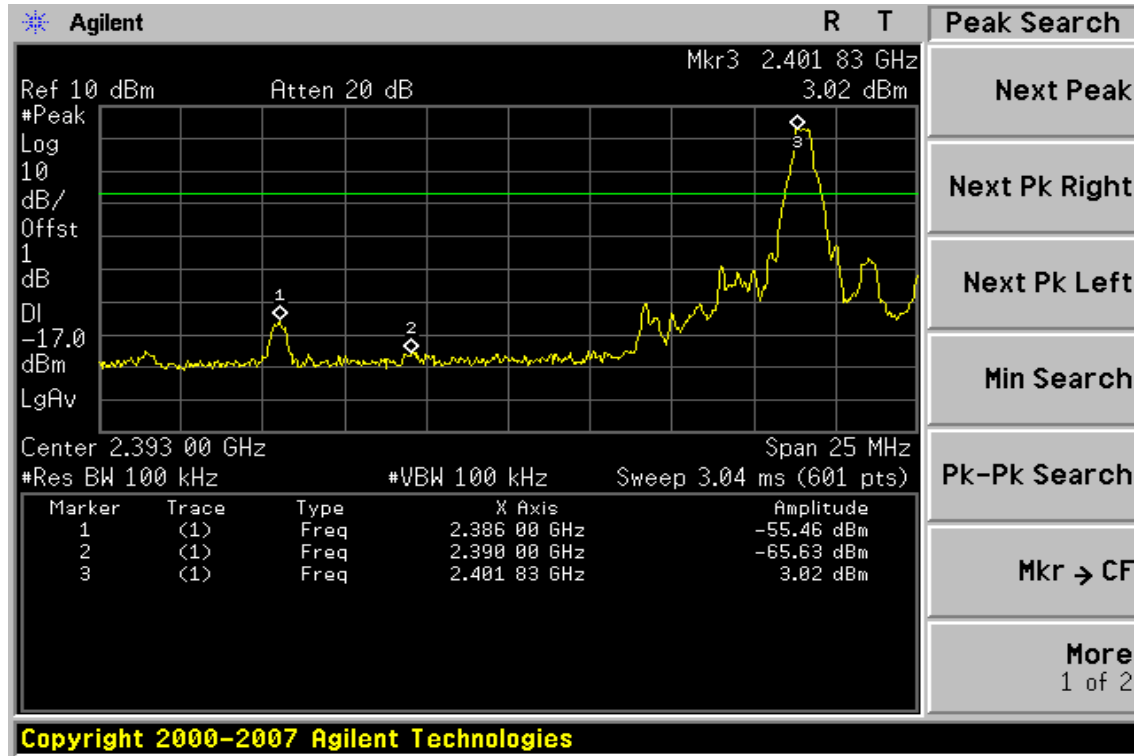

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms_and_conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.com/site/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.

Band Edges Test Data CH-High

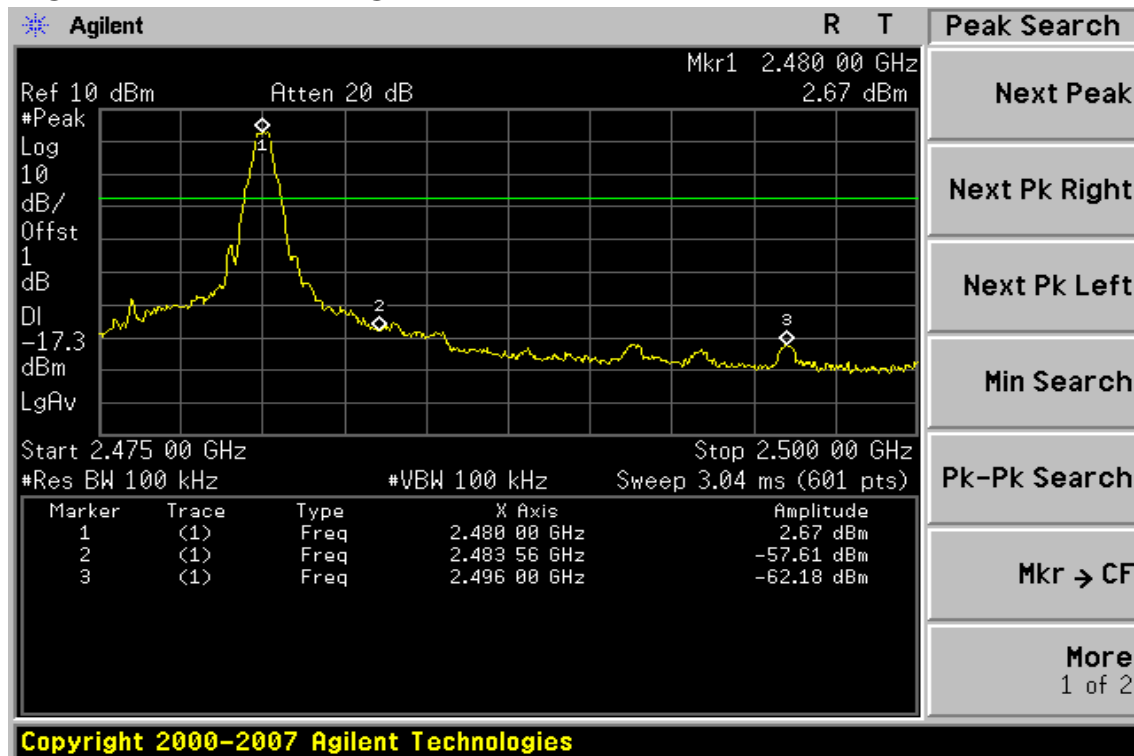

Radiated Emission:

Operation Mode TX CH Low
Fundamental Frequency 2402 MHz
Temperature 25 °C
Humidity 65 %

Test Date Aug. 23, 2009
Test By Jason
Pol Ver.

| Freq. (MHz) | Peak Reading | AV Reading | Ant./CL CF(dB) | Actual FS | | Peak Limit | AV Limit | Margin (dB) | Remark |
|----------------|-----------------|---------------|-------------------|------------------|----------------|---------------|-------------|----------------|--------|
| | (dBuV) | (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | (dBuV/m) | (dBuV/m) | | |
| 2390.00 | 47.74 | -- | -1.39 | 46.35 | --- | 74.00 | 54.00 | -7.65 | Peak |

Operation Mode TX CH Low
Fundamental Frequency 2402 MHz
Temperature 25 °C
Humidity 65 %

Test Date Aug. 23, 2009
Test By Jason
Pol Hor.

| Freq. (MHz) | Peak Reading | AV Reading | Ant./CL CF(dB) | Actual FS | | Peak Limit | AV Limit | Margin (dB) | Remark |
|----------------|-----------------|---------------|-------------------|------------------|----------------|---------------|-------------|----------------|--------|
| | (dBuV) | (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | (dBuV/m) | (dBuV/m) | | |
| 2390.00 | 47.63 | -- | -1.39 | 46.24 | --- | 74.00 | 54.00 | -7.76 | Peak |

Remark :

- (1) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (3) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Emission:

Operation Mode TX CH High
Fundamental Frequency 2480 MHz
Temperature 25 °C
Humidity 65 %

Test Date Aug. 23, 2009
Test By Jason
Pol Ver.

| Freq. (MHz) | Peak Reading (dBuV) | AV Reading (dBuV) | Ant./CL CF(dB) | Actual FS | | Peak Limit (dBuV/m) | AV Limit (dBuV/m) | Margin (dB) | Remark |
|----------------|---------------------------|-------------------------|-------------------|------------------|----------------|---------------------------|-------------------------|----------------|--------|
| | | | | Peak (dBuV/m) | AV (dBuV/m) | | | | |
| 2483.56 | 47.16 | -- | -0.92 | 46.24 | --- | 74.00 | 54.00 | -7.76 | Peak |
| 2496.00 | 47.12 | -- | -0.92 | 46.20 | --- | 74.00 | 54.00 | -7.80 | Peak |

Operation Mode TX CH High
Fundamental Frequency 2480 MHz
Temperature 25 °C
Humidity 65 %



Test Date Aug. 23, 2009
Test By Jason
Pol Hor.

| Freq. (MHz) | Peak Reading (dBuV) | AV Reading (dBuV) | Ant./CL CF(dB) | Actual FS | | Peak Limit (dBuV/m) | AV Limit (dBuV/m) | Margin (dB) | Remark |
|----------------|---------------------------|-------------------------|-------------------|------------------|----------------|---------------------------|-------------------------|----------------|--------|
| | | | | Peak (dBuV/m) | AV (dBuV/m) | | | | |
| 2483.56 | 51.43 | -- | -0.92 | 50.51 | --- | 74.00 | 54.00 | -3.49 | Peak |
| 2496.00 | 46.93 | -- | -0.84 | 46.09 | --- | 74.00 | 54.00 | -7.91 | Peak |

Remark :

- (1) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (3) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.


EDR Mode Band Edges Test Data CH-Low

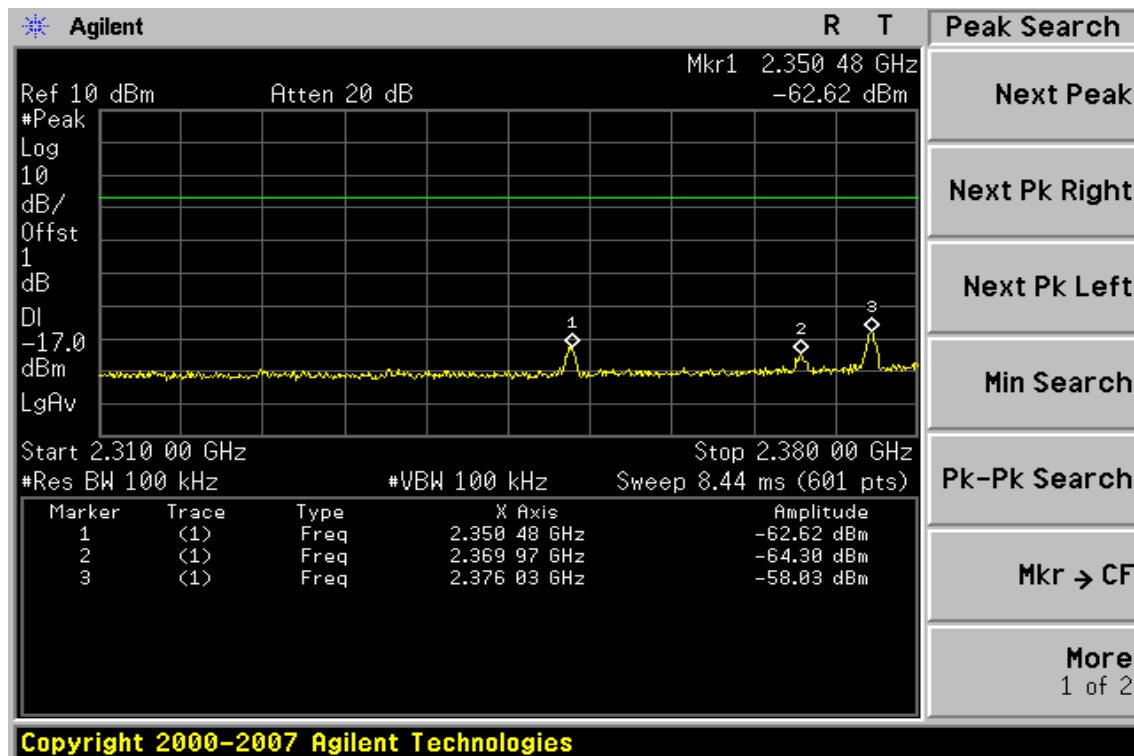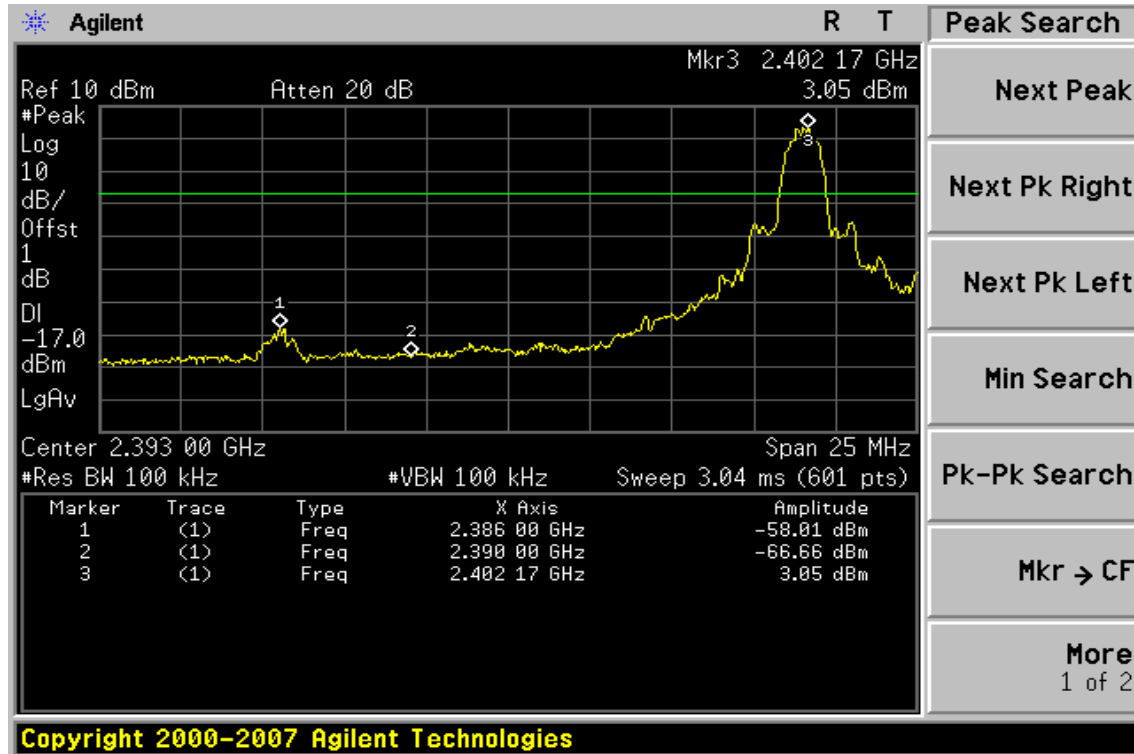

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms_and_conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.com/site/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.

Band Edges Test Data CH-High

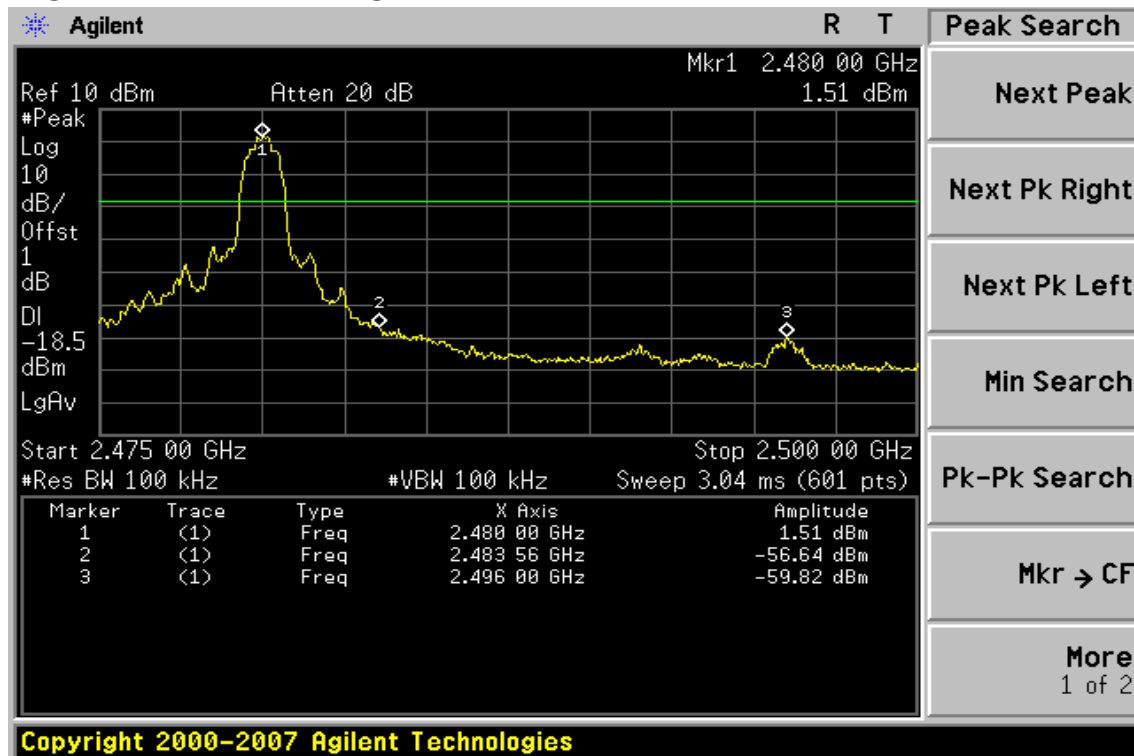

Radiated Emission:

Operation Mode TX CH Low
Fundamental Frequency 2402 MHz
Temperature 25 °C
Humidity 65 %

Test Date Aug. 23, 2009
Test By Jason
Pol Ver.

| Freq. (MHz) | Peak Reading | AV Reading | Ant./CL CF(dB) | Actual FS | | Peak Limit | AV Limit | Margin (dB) | Remark |
|----------------|-----------------|---------------|-------------------|------------------|----------------|---------------|-------------|----------------|--------|
| | (dBuV) | (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | (dBuV/m) | (dBuV/m) | | |
| 2386.00 | 46.76 | -- | -1.40 | 45.36 | --- | 74.00 | 54.00 | -8.64 | Peak |
| 2390.00 | 46.89 | -- | -1.39 | 45.50 | --- | 74.00 | 54.00 | -8.50 | Peak |

Operation Mode TX CH Low
Fundamental Frequency 2402 MHz
Temperature 25 °C
Humidity 65 %

Test Date Aug. 23, 2009
Test By Jason
Pol Hor.

| Freq. (MHz) | Peak Reading | AV Reading | Ant./CL CF(dB) | Actual FS | | Peak Limit | AV Limit | Margin (dB) | Remark |
|----------------|-----------------|---------------|-------------------|------------------|----------------|---------------|-------------|----------------|--------|
| | (dBuV) | (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | (dBuV/m) | (dBuV/m) | | |
| 2386.00 | 8.14 | -- | -1.40 | 6.74 | --- | 74.00 | 54.00 | -47.26 | Peak |
| 2390.00 | 46.90 | -- | -1.39 | 45.51 | --- | 74.00 | 54.00 | -8.49 | Peak |

Remark :

- (1) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column ◦
- (3) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Emission:

Operation Mode TX CH High
Fundamental Frequency 2480 MHz
Temperature 25 °C
Humidity 65 %

Test Date Aug. 23, 2009
Test By Jason
Pol Ver.

| Freq. (MHz) | Peak Reading (dBuV) | AV Reading (dBuV) | Ant./CL CF(dB) | Actual FS | | Peak Limit (dBuV/m) | AV Limit (dBuV/m) | Margin (dB) | Remark |
|----------------|---------------------------|-------------------------|-------------------|------------------|----------------|---------------------------|-------------------------|----------------|--------|
| | | | | Peak (dBuV/m) | AV (dBuV/m) | | | | |
| 2483.56 | 47.66 | -- | -0.92 | 46.74 | --- | 74.00 | 54.00 | -7.26 | Peak |
| 2496.00 | 46.80 | -- | -0.84 | 45.96 | --- | 74.00 | 54.00 | -8.04 | Peak |

Operation Mode TX CH High
Fundamental Frequency 2480 MHz
Temperature 25 °C
Humidity 65 %

Test Date Aug. 23, 2009
Test By Jason
Pol Hor.

| Freq. (MHz) | Peak Reading (dBuV) | AV Reading (dBuV) | Ant./CL CF(dB) | Actual FS | | Peak Limit (dBuV/m) | AV Limit (dBuV/m) | Margin (dB) | Remark |
|----------------|---------------------------|-------------------------|-------------------|------------------|----------------|---------------------------|-------------------------|----------------|--------|
| | | | | Peak (dBuV/m) | AV (dBuV/m) | | | | |
| 2483.56 | 50.87 | -- | -0.92 | 49.95 | --- | 74.00 | 54.00 | -4.05 | Peak |
| 2485.35 | 50.19 | -- | -0.92 | 49.27 | --- | 74.00 | 54.00 | -4.73 | Peak |
| 2496.00 | 47.86 | -- | -0.84 | 47.02 | --- | 74.00 | 54.00 | -6.98 | Peak |

Remark :

- (1) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column ◦
- (3) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

8. SPURIOUS EMISSION TEST

8.1. Standard Applicable:

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

According to RSS-Gen §7.2.3 and RSS-210 issue 7, §A2.9, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

8.2. Measurement Equipment Used:

8.2.1. Conducted Emission at antenna port:

Refer to section 6.2 for details.

8.2.2. Radiated emission:

Refer to section 7.2 for details.

8.3. Test SET-UP:

8.3.1. Conducted Emission at antenna port:

Refer to section 6.3 for details.

8.3.2. Radiated emission:

Refer to section 7.3 for details.

8.4. Measurement Procedure:

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Repeat above procedures until all frequency measured were complete.

8.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:


$$FS = RA + AF + CL - AG$$

| | | |
|-------|------------------------|--|
| Where | FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| | RA = Reading Amplitude | AG = Amplifier Gain |
| | AF = Antenna Factor | |


8.6. Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

BDR Mode Conducted Spurious Emission Measurement Result Ch Low 30MHz – 3GHz

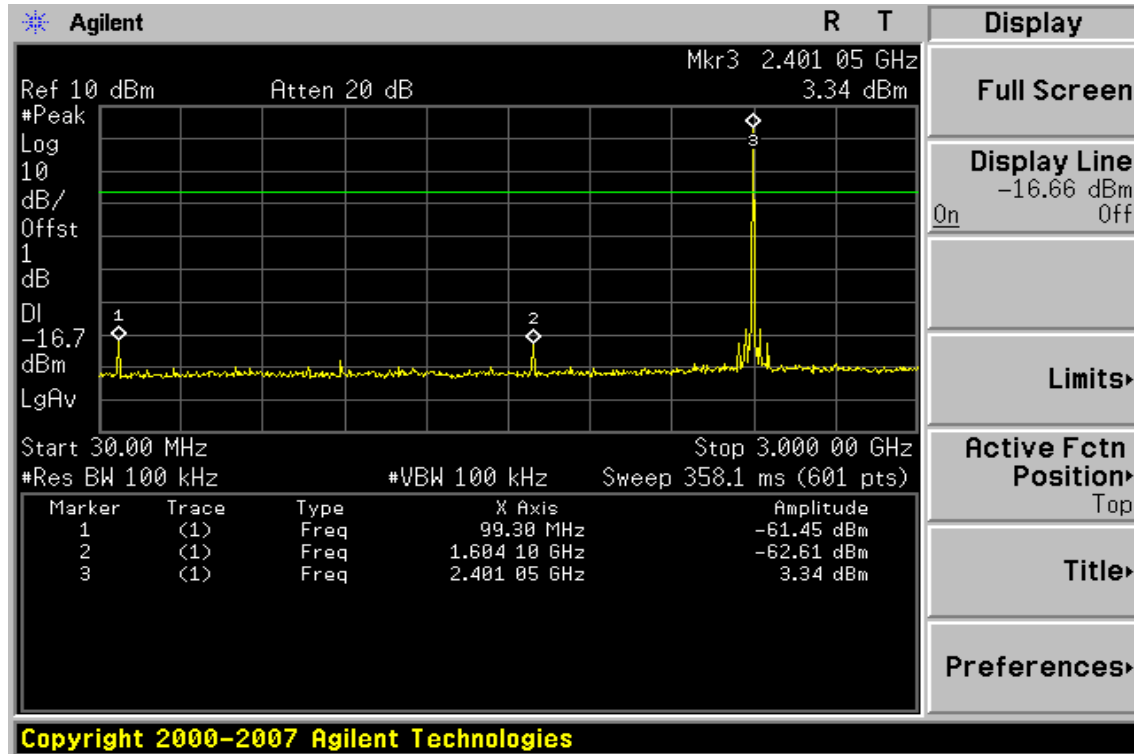


Ch Low 3GHz – 26.5GHz

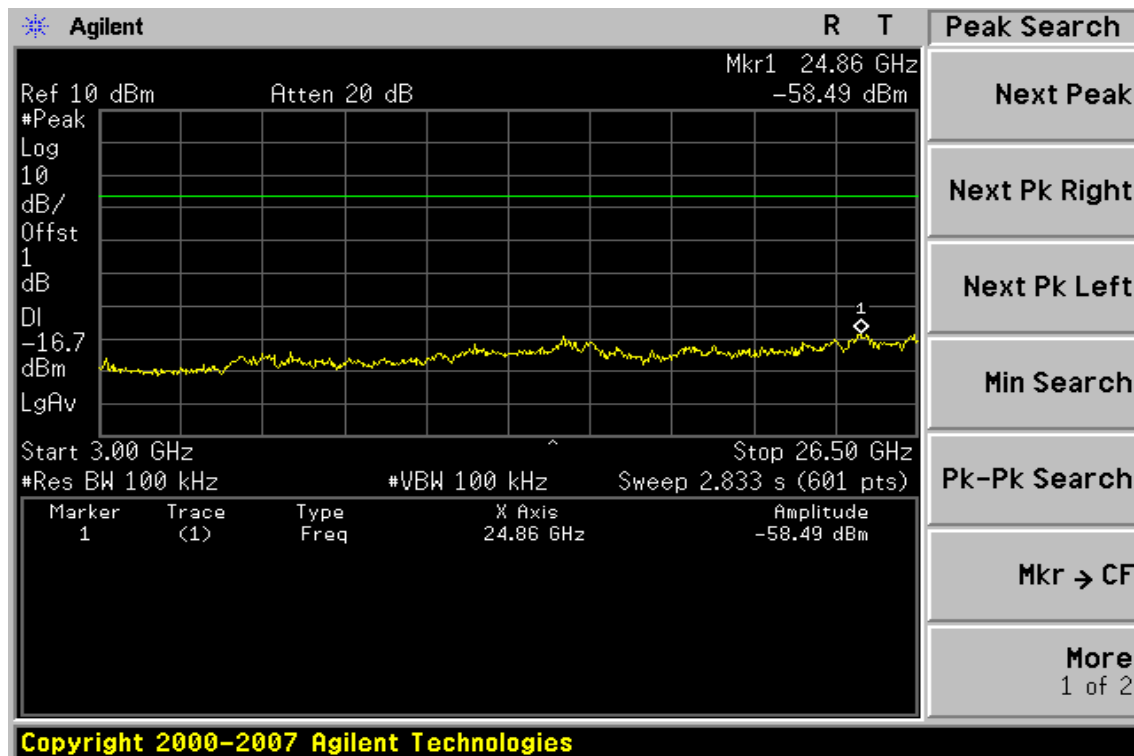


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms_and_conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.com/site/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.


Ch Mid 30MHz – 3GHz

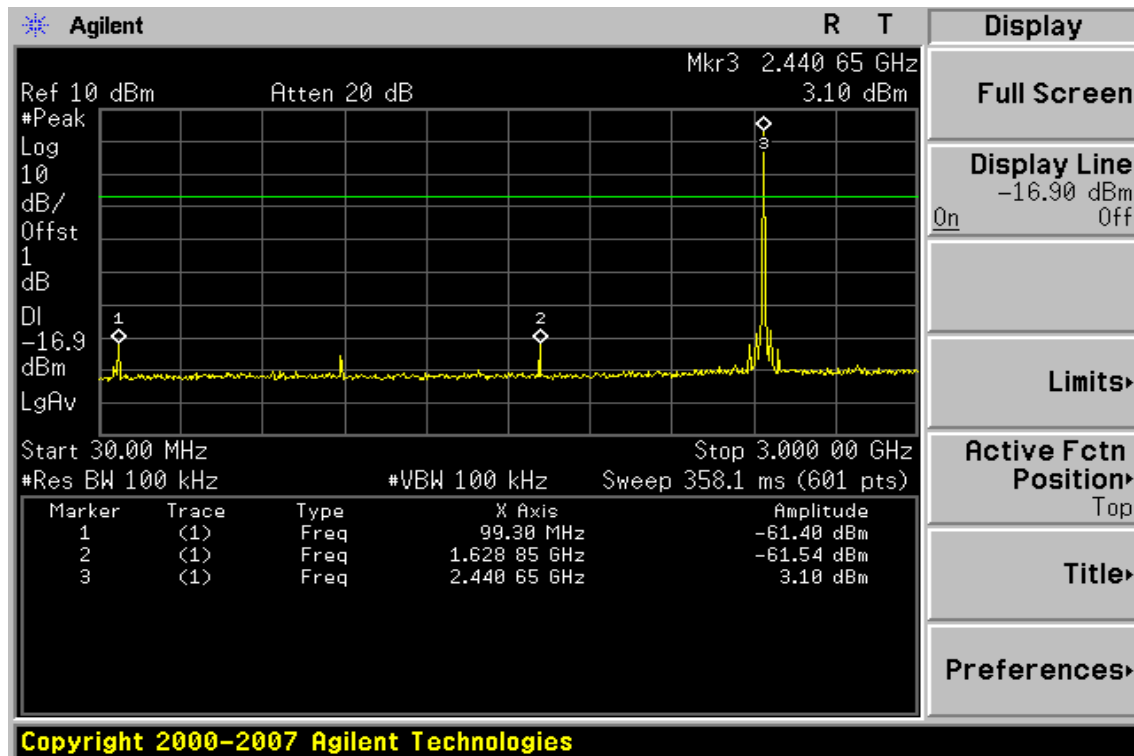


Ch Mid 3GHz – 26.5GHz

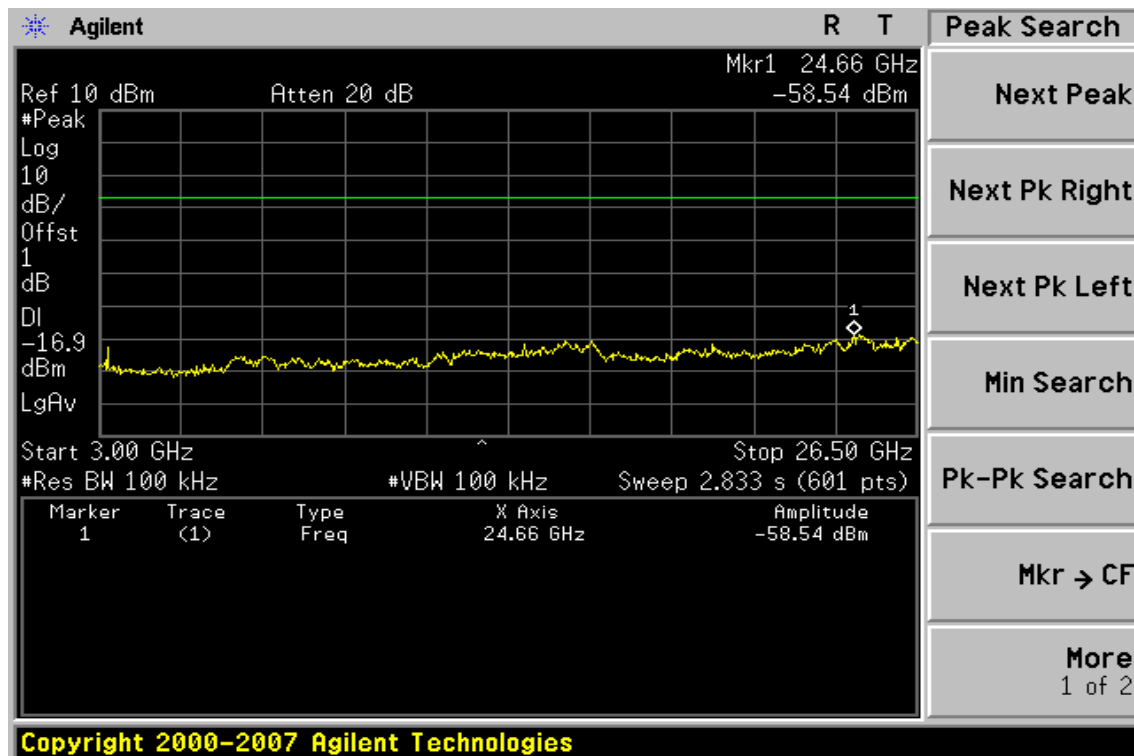


Ch High 30MHz – 3GHz

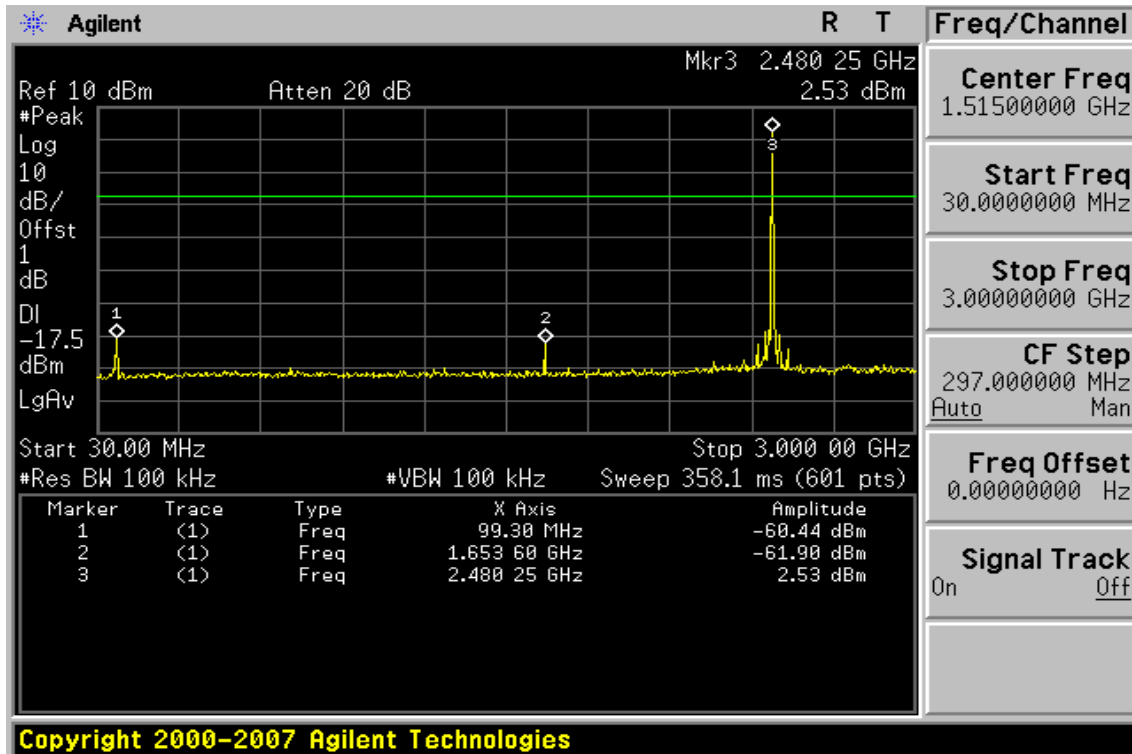


Ch High 3GHz – 26.5GHz

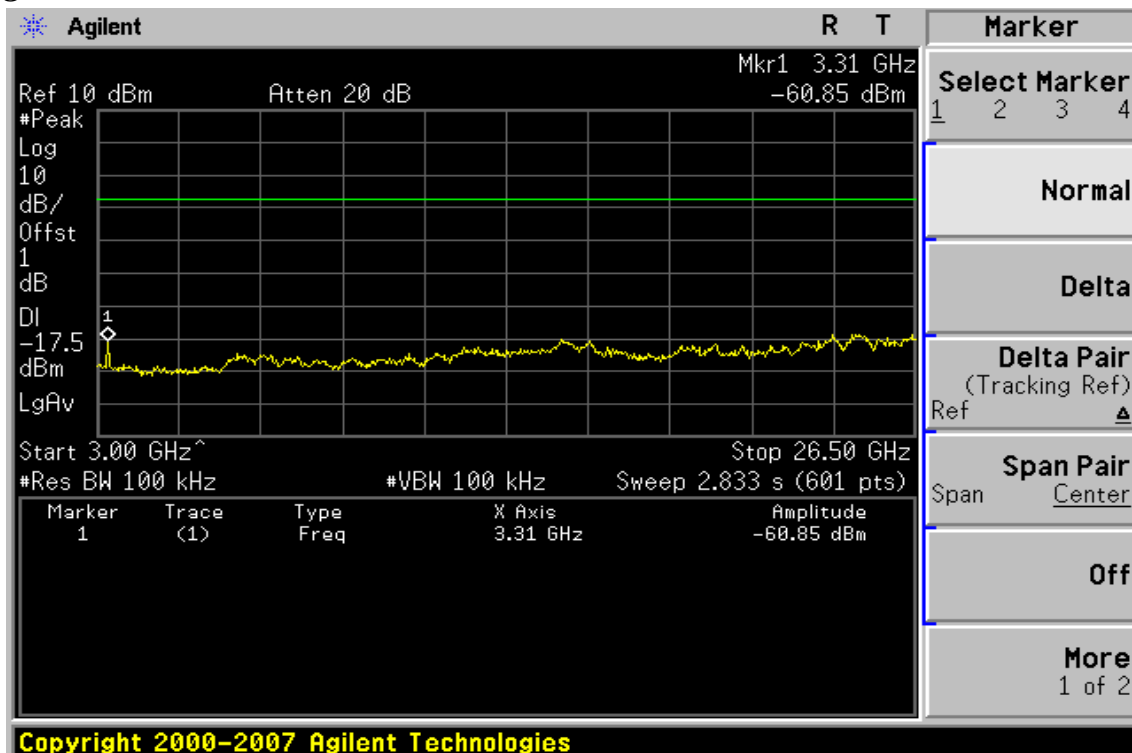

EDR Mode Conducted Spurious Emission Measurement Result Ch Low 30MHz – 3GHz

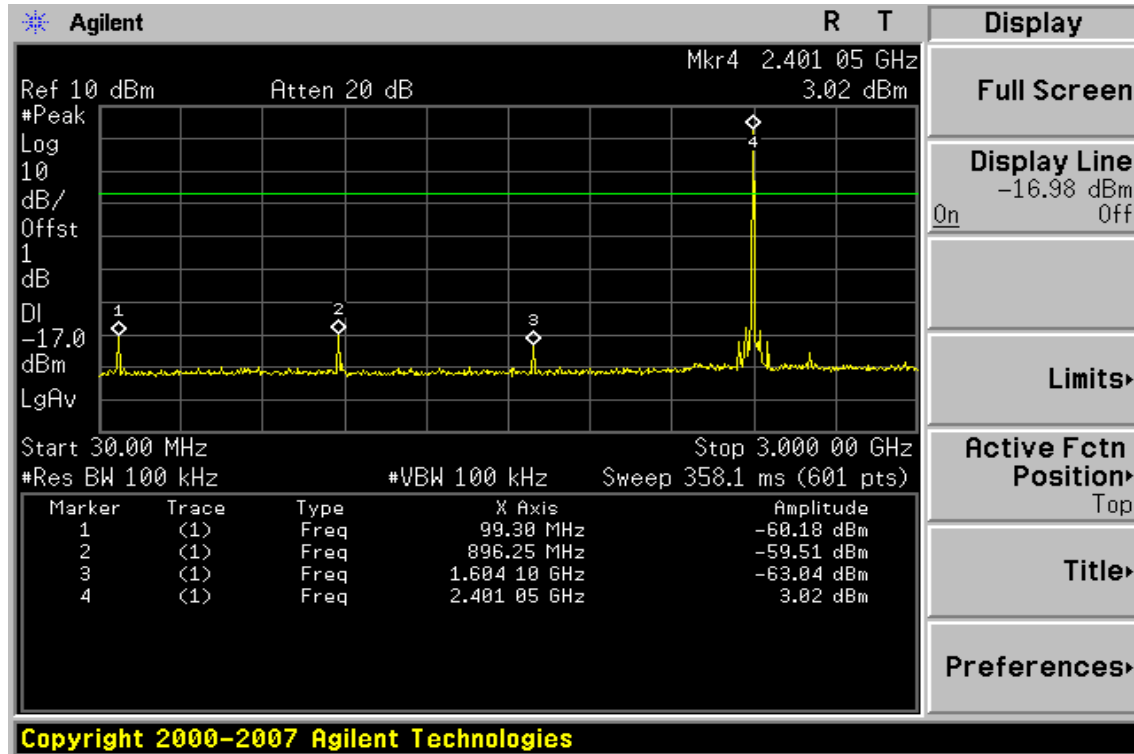


Ch Low 3GHz – 26.5GHz

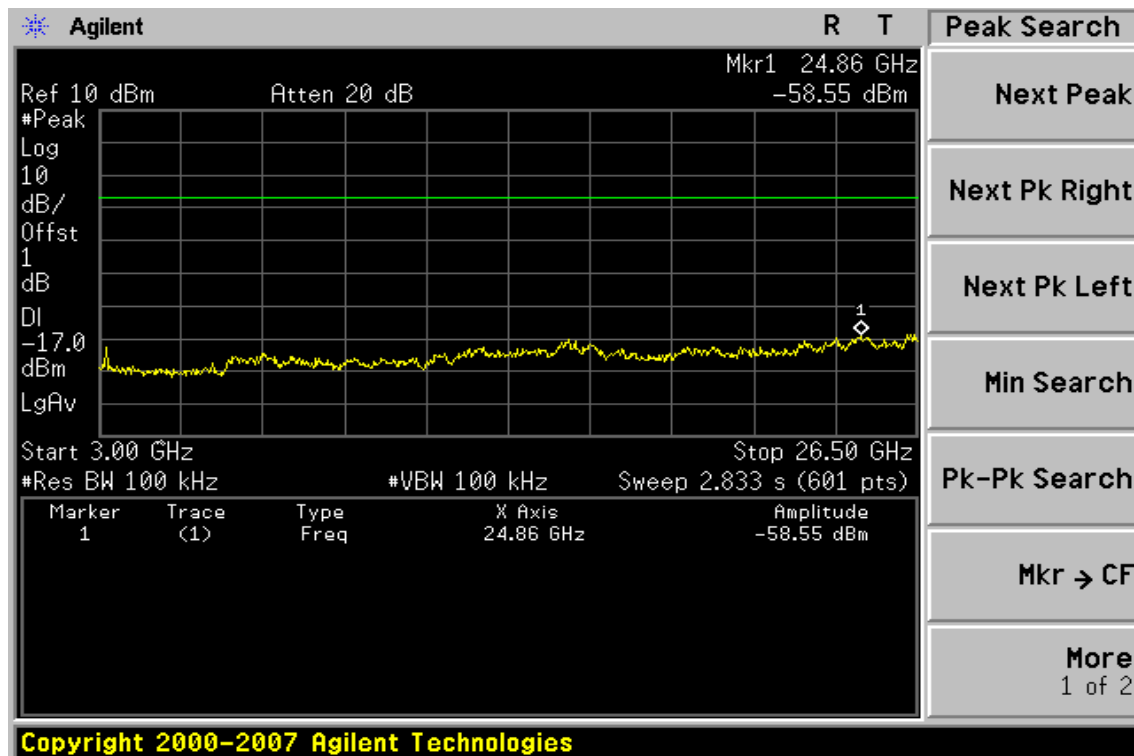


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms_and_conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.com/site/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.


Ch Mid 30MHz – 3GHz

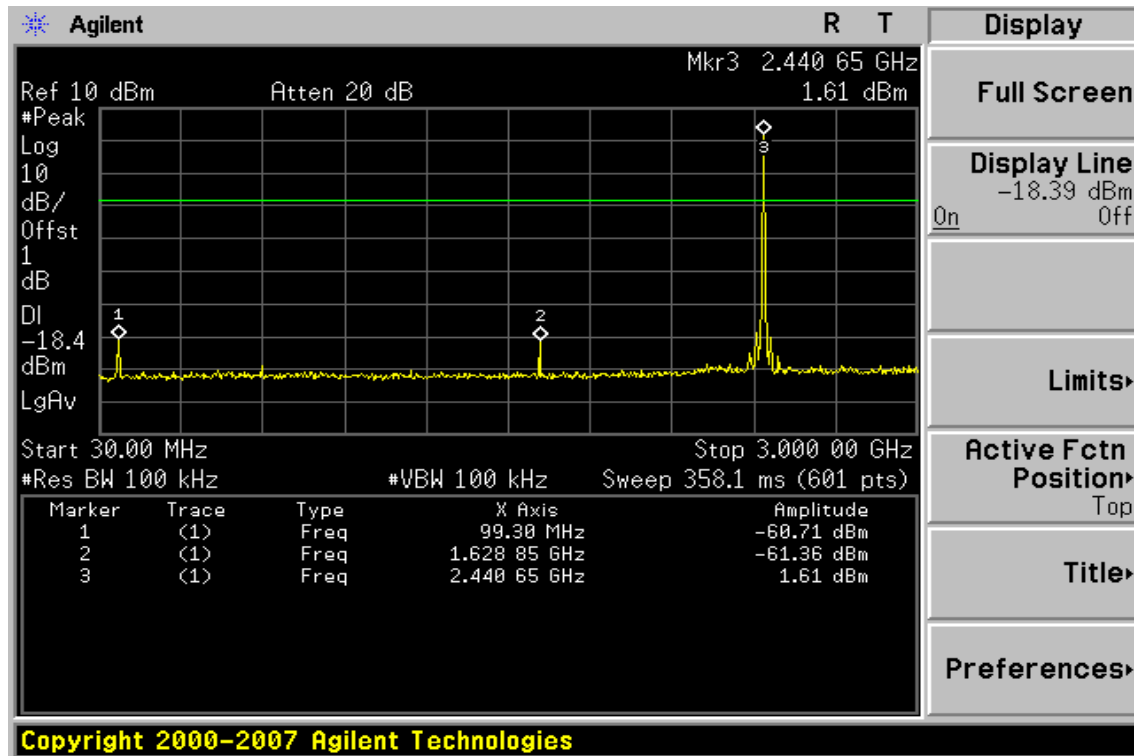


Ch Mid 3GHz – 26.5GHz

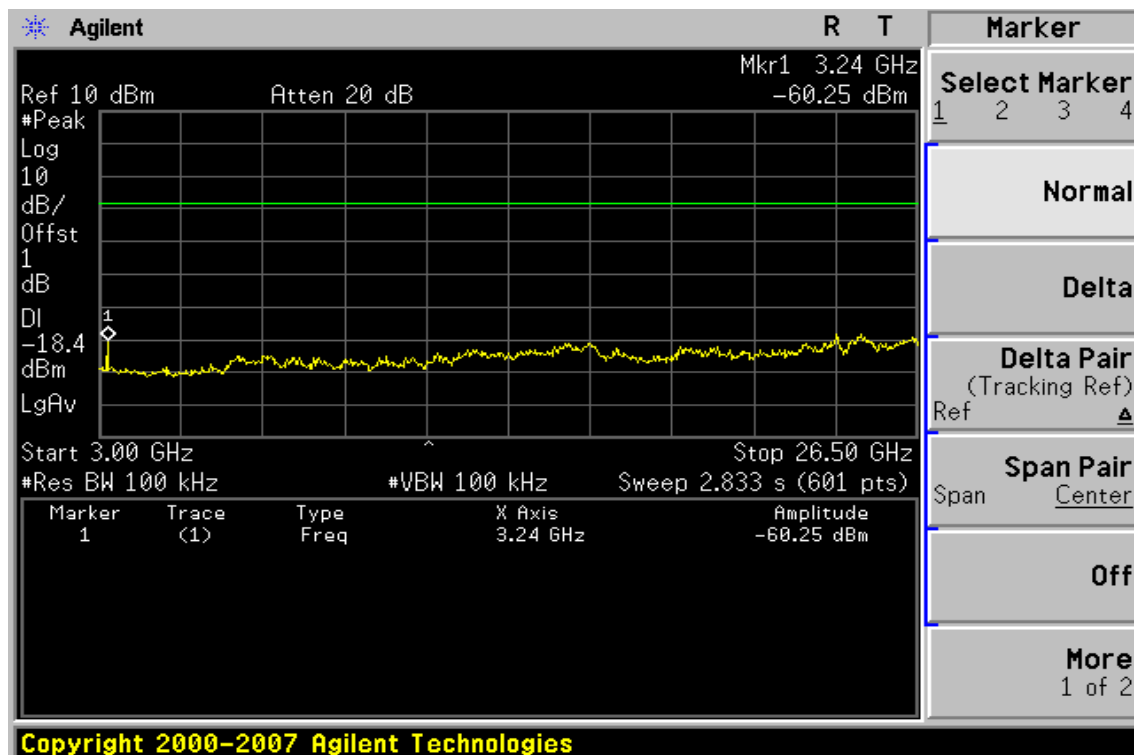

Ch High 30MHz – 3GHz

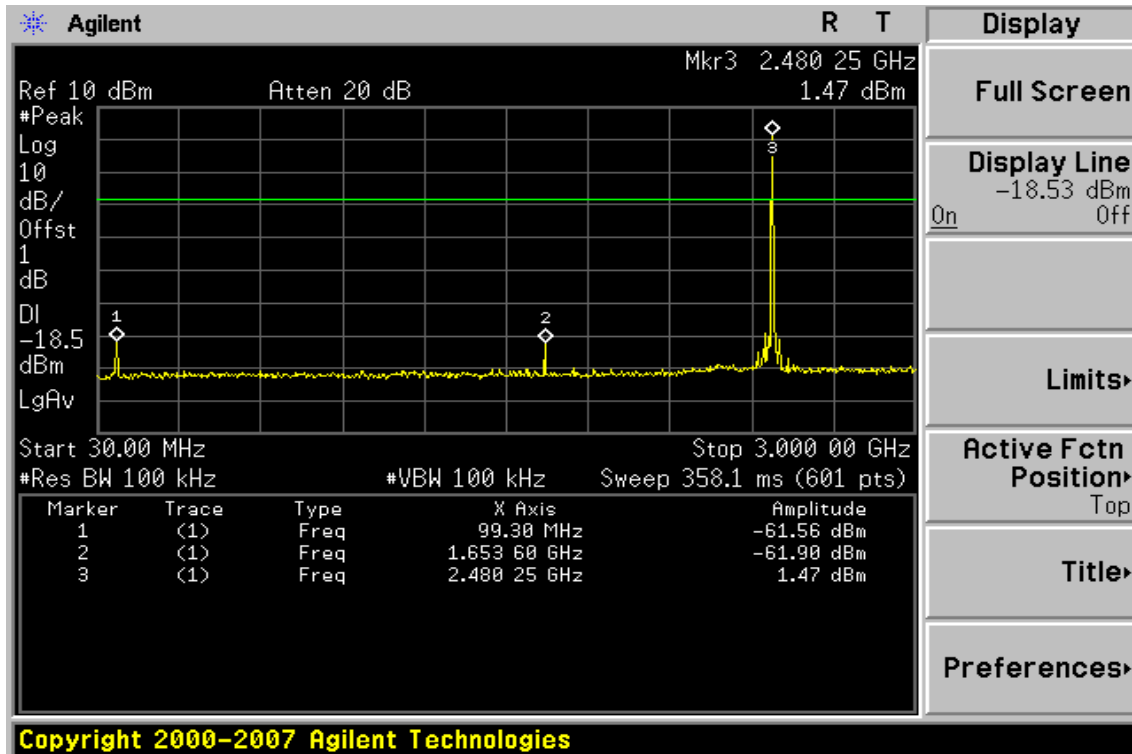

Ch High 3GHz – 26.5GHz

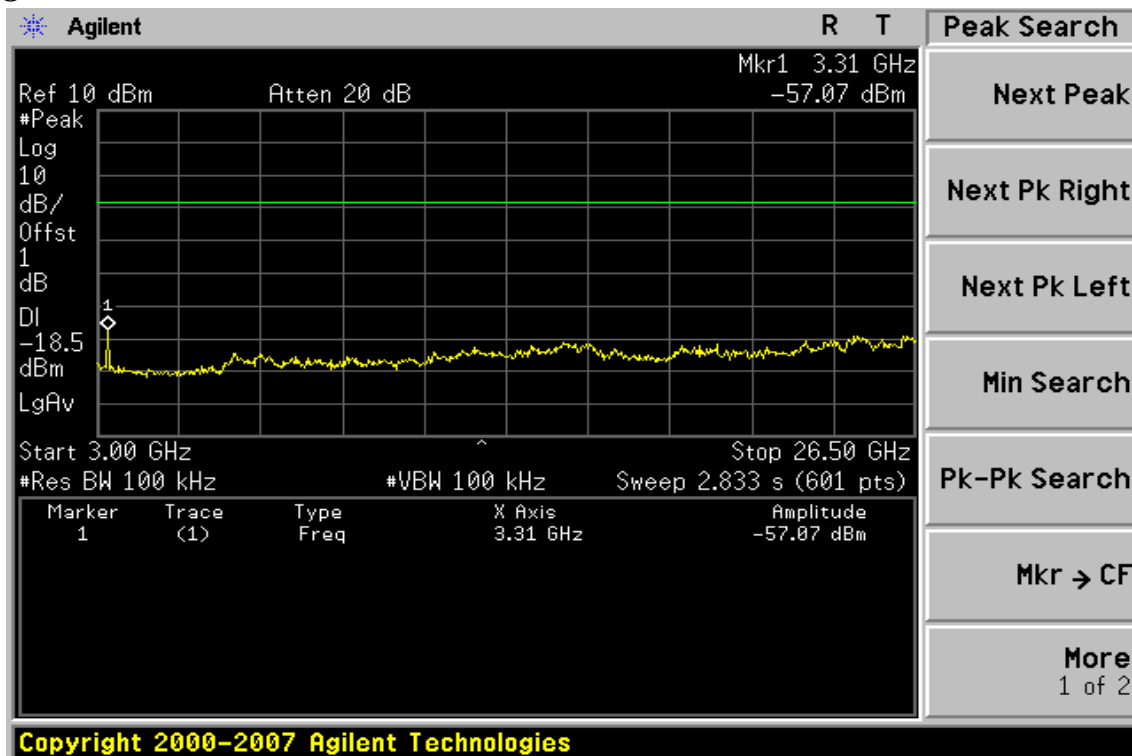

BDR Mode**Radiated Spurious Emission Measurement Result (below 1GHz)**

| | | | |
|-----------------------|----------------------------------|-----------|---------------|
| Operation Mode | TX CH Low, BDR mode (worst case) | Test Date | Aug. 24, 2009 |
| Fundamental Frequency | 2402MHz | Test By | Jason |
| Temperature | 25 °C | Pol | Ver./Hor. |
| Humidity | 65 % | | |

| Freq. (MHz) | Ant.Pol. H/V | Detector Mode (PK/QP) | Reading (dBuV) | Factor (dB) | Actual FS (dBuV/m) | Limit3m (dBuV/m) | Safe Margin (dB) |
|----------------|-----------------|-----------------------------|-------------------|----------------|-----------------------|---------------------|---------------------|
| 33.88 | V | Peak | 49.53 | -14.65 | 34.88 | 40.00 | -5.12 |
| 56.19 | V | Peak | 42.65 | -14.63 | 28.02 | 40.00 | -11.98 |
| 33.88 | H | Peak | 51.50 | -14.65 | 36.85 | 40.00 | -3.15 |
| 53.28 | H | Peak | 41.75 | -14.40 | 27.35 | 40.00 | -12.65 |

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz °
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

| | | | |
|-----------------------|----------------------------------|-----------|---------------|
| Operation Mode | TX CH Mid, BDR mode (worst case) | Test Date | Aug. 24, 2009 |
| Fundamental Frequency | 2441MHz | Test By | Jason |
| Temperature | 25 °C | Pol | Ver./Hor. |
| Humidity | 65 % | | |

| Freq. (MHz) | Ant.Pol. H/V | Detector Mode (PK/QP) | Reading (dBuV) | Factor (dB) | Actual FS (dBuV/m) | Limit3m (dBuV/m) | Safe Margin (dB) |
|----------------|-----------------|-----------------------------|-------------------|----------------|-----------------------|---------------------|---------------------|
| 33.88 | V | Peak | 50.13 | -14.65 | 35.48 | 40.00 | -4.52 |
| 56.19 | V | Peak | 42.20 | -14.63 | 27.57 | 40.00 | -12.43 |
| 33.88 | H | Peak | 51.24 | -14.65 | 36.59 | 40.00 | -3.41 |
| 53.28 | H | Peak | 48.59 | -14.40 | 34.19 | 40.00 | -5.81 |

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz .
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

| | | | |
|-----------------------|-----------------------------------|-----------|---------------|
| Operation Mode | TX CH High, BDR mode (worst case) | Test Date | Aug. 24, 2009 |
| Fundamental Frequency | 2480MHz | Test By | Jason |
| Temperature | 25 °C | Pol | Ver./Hor. |
| Humidity | 65 % | | |

| Freq. (MHz) | Ant.Pol. H/V | Detector Mode (PK/QP) | Reading (dBuV) | Factor (dB) | Actual FS (dBuV/m) | Limit3m (dBuV/m) | Safe Margin (dB) |
|----------------|-----------------|-----------------------------|-------------------|----------------|-----------------------|---------------------|---------------------|
| 33.88 | V | Peak | 49.33 | -14.65 | 34.68 | 40.00 | -5.32 |
| 56.19 | V | Peak | 42.10 | -14.63 | 27.47 | 40.00 | -12.53 |
| 33.88 | H | Peak | 50.71 | -14.65 | 36.06 | 40.00 | -3.94 |
| 56.19 | H | Peak | 42.61 | -14.63 | 27.98 | 40.00 | -12.02 |

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz .
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Radiated Spurious Emission Measurement Result (above 1GHz)

| | | | |
|-----------------------|----------------------------------|-----------|---------------|
| Operation Mode | TX CH Low, BDR mode (worst case) | Test Date | Aug. 24, 2009 |
| Fundamental Frequency | 2402 MHz | Test By | Jason |
| Temperature | 25 °C | Pol | Ver. |
| Humidity | 65 % | | |

| Freq. (MHz) | Peak Reading | AV Reading | Ant./CL CF(dB) | Actual FS | | Peak Limit | AV Limit | Margin (dB) | |
|----------------|-----------------|---------------|-------------------|------------------|----------------|---------------|-------------|----------------|------|
| | (dBuV) | (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | (dBuV/m) | (dBuV/m) | | |
| 1598.0 | 40.00 | --- | -5.48 | 34.52 | --- | 74.00 | 54.00 | -19.48 | Peak |
| 3158.0 | 37.35 | --- | 0.93 | 38.28 | --- | 74.00 | 54.00 | -15.72 | Peak |
| 4804.0 | ---- | | | | | 74.00 | 54.00 | | |
| 7206.0 | ---- | | | | | 74.00 | 54.00 | | |
| 9608.0 | ---- | | | | | 74.00 | 54.00 | | |
| 12010.0 | ---- | | | | | 74.00 | 54.00 | | |
| 14412.0 | ---- | | | | | 74.00 | 54.00 | | |
| 16814.0 | ---- | | | | | 74.00 | 54.00 | | |
| 19216.0 | ---- | | | | | 74.00 | 54.00 | | |
| 21618.0 | ---- | | | | | 74.00 | 54.00 | | |
| 24020.0 | ---- | | | | | 74.00 | 54.00 | | |

Remark :

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency °
- (2) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

| | | | |
|-----------------------|----------------------------------|-----------|---------------|
| Operation Mode | TX CH Low, BDR mode (worst case) | Test Date | Aug. 24, 2009 |
| Fundamental Frequency | 2402 MHz | Test By | Jason |
| Temperature | 25 °C | Pol | Hor. |
| Humidity | 65 % | | |

| Freq. (MHz) | Peak Reading | AV Reading | Ant./CL CF(dB) | Actual FS | | Peak Limit | AV Limit | Margin (dB) | |
|----------------|-----------------|---------------|-------------------|------------------|----------------|---------------|-------------|----------------|------|
| | (dBuV) | (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | (dBuV/m) | (dBuV/m) | | |
| 1598.0 | 53.55 | --- | -5.48 | 48.07 | --- | 74.00 | 54.00 | -5.93 | Peak |
| 3158.0 | 42.94 | --- | 0.93 | 43.87 | --- | 74.00 | 54.00 | -10.13 | Peak |
| 4804.0 | ---- | | | | | 74.00 | 54.00 | | |
| 7206.0 | ---- | | | | | 74.00 | 54.00 | | |
| 9608.0 | ---- | | | | | 74.00 | 54.00 | | |
| 12010.0 | ---- | | | | | 74.00 | 54.00 | | |
| 14412.0 | ---- | | | | | 74.00 | 54.00 | | |
| 16814.0 | ---- | | | | | 74.00 | 54.00 | | |
| 19216.0 | ---- | | | | | 74.00 | 54.00 | | |
| 21618.0 | ---- | | | | | 74.00 | 54.00 | | |
| 24020.0 | ---- | | | | | 74.00 | 54.00 | | |

Remark :

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency °
- (2) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

| | | | |
|-----------------------|----------------------------------|-----------|---------------|
| Operation Mode | TX CH Mid, BDR mode (worst case) | Test Date | Aug. 24, 2009 |
| Fundamental Frequency | 2441 MHz | Test By | Jason |
| Temperature | 25 °C | Pol | Ver. |
| Humidity | 65 % | | |

| Freq. (MHz) | Peak Reading | AV Reading | Ant./CL CF(dB) | Actual FS | | Peak Limit | AV Limit | Margin (dB) | |
|----------------|-----------------|---------------|-------------------|------------------|----------------|---------------|-------------|----------------|------|
| | (dBuV) | (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | (dBuV/m) | (dBuV/m) | | |
| 1630.5 | 49.39 | --- | -5.26 | 44.13 | --- | 74.00 | 54.00 | -9.87 | Peak |
| 3158.0 | 36.55 | --- | 0.93 | 37.48 | --- | 74.00 | 54.00 | -16.52 | Peak |
| 4882.0 | ---- | | | | | 74.00 | 54.00 | | |
| 7323.0 | ---- | | | | | 74.00 | 54.00 | | |
| 9764.0 | ---- | | | | | 74.00 | 54.00 | | |
| 12205.0 | ---- | | | | | 74.00 | 54.00 | | |
| 14646.0 | ---- | | | | | 74.00 | 54.00 | | |
| 17087.0 | ---- | | | | | 74.00 | 54.00 | | |
| 19528.0 | ---- | | | | | 74.00 | 54.00 | | |
| 21969.0 | ---- | | | | | 74.00 | 54.00 | | |
| 24410.0 | ---- | | | | | 74.00 | 54.00 | | |

Remark :

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency °
- (2) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

| | | | |
|-----------------------|----------------------------------|-----------|---------------|
| Operation Mode | TX CH Mid, BDR mode (worst case) | Test Date | Aug. 24, 2009 |
| Fundamental Frequency | 2441 MHz | Test By | Jason |
| Temperature | 25 °C | Pol | Hor. |
| Humidity | 65 % | | |

| Freq. (MHz) | Peak Reading | AV Reading | Ant./CL CF(dB) | Actual FS | | Peak Limit | AV Limit | Margin (dB) | |
|----------------|-----------------|---------------|-------------------|------------------|----------------|---------------|-------------|----------------|------|
| | (dBuV) | (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | (dBuV/m) | (dBuV/m) | | |
| 1630.5 | 52.81 | --- | -5.26 | 47.55 | --- | 74.00 | 54.00 | -6.45 | Peak |
| 3190.5 | 41.62 | --- | 1.06 | 42.68 | --- | 74.00 | 54.00 | -11.32 | Peak |
| 4882.0 | ---- | | | | | 74.00 | 54.00 | | |
| 7323.0 | ---- | | | | | 74.00 | 54.00 | | |
| 9764.0 | ---- | | | | | 74.00 | 54.00 | | |
| 12205.0 | ---- | | | | | 74.00 | 54.00 | | |
| 14646.0 | ---- | | | | | 74.00 | 54.00 | | |
| 17087.0 | ---- | | | | | 74.00 | 54.00 | | |
| 19528.0 | ---- | | | | | 74.00 | 54.00 | | |
| 21969.0 | ---- | | | | | 74.00 | 54.00 | | |
| 24410.0 | ---- | | | | | 74.00 | 54.00 | | |

Remark :

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency °
- (2) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

| | | | |
|-----------------------|-----------------------------------|-----------|---------------|
| Operation Mode | TX CH High, BDR mode (worst case) | Test Date | Aug. 24, 2009 |
| Fundamental Frequency | 2480 MHz | Test By | Jason |
| Temperature | 25 °C | Pol | Ver. |
| Humidity | 65 % | | |

| Freq. (MHz) | Peak Reading | AV Reading | Ant./CL CF(dB) | Actual FS | | Peak Limit | AV Limit | Margin (dB) | |
|----------------|-----------------|---------------|-------------------|------------------|----------------|---------------|-------------|----------------|------|
| | (dBuV) | (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | (dBuV/m) | (dBuV/m) | | |
| 1643.5 | 49.07 | --- | -5.22 | 43.85 | --- | 74.00 | 54.00 | -10.15 | Peak |
| 3203.5 | 36.00 | --- | 1.07 | 37.07 | --- | 74.00 | 54.00 | -16.93 | Peak |
| 4960.0 | ---- | | | | | 74.00 | 54.00 | | |
| 7440.0 | ---- | | | | | 74.00 | 54.00 | | |
| 9920.0 | ---- | | | | | 74.00 | 54.00 | | |
| 12400.0 | ---- | | | | | 74.00 | 54.00 | | |
| 14880.0 | ---- | | | | | 74.00 | 54.00 | | |
| 17360.0 | ---- | | | | | 74.00 | 54.00 | | |
| 19840.0 | ---- | | | | | 74.00 | 54.00 | | |
| 22320.0 | ---- | | | | | 74.00 | 54.00 | | |
| 24800.0 | ---- | | | | | 74.00 | 54.00 | | |

Remark :

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency °
- (2) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

| | | | |
|-----------------------|-----------------------------------|-----------|---------------|
| Operation Mode | TX CH High, BDR mode (worst case) | Test Date | Aug. 24, 2009 |
| Fundamental Frequency | 2480 MHz | Test By | Jason |
| Temperature | 25 °C | Pol | Hor. |
| Humidity | 65 % | | |

| Freq. (MHz) | Peak Reading | AV Reading | Ant./CL CF(dB) | Actual FS | | Peak Limit | AV Limit | Margin (dB) | |
|----------------|-----------------|---------------|-------------------|------------------|----------------|---------------|-------------|----------------|------|
| | (dBuV) | (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | (dBuV/m) | (dBuV/m) | | |
| 1643.5 | 53.54 | --- | -5.22 | 48.32 | --- | 74.00 | 54.00 | -5.68 | Peak |
| 2976.0 | 37.21 | --- | 0.32 | 37.53 | --- | 74.00 | 54.00 | -16.47 | Peak |
| 3190.0 | 42.35 | --- | 1.06 | 43.41 | --- | 74.00 | 54.00 | -10.59 | Peak |
| 4960.0 | ---- | | | | | 74.00 | 54.00 | | |
| 7440.0 | ---- | | | | | 74.00 | 54.00 | | |
| 9920.0 | ---- | | | | | 74.00 | 54.00 | | |
| 12400.0 | ---- | | | | | 74.00 | 54.00 | | |
| 14880.0 | ---- | | | | | 74.00 | 54.00 | | |
| 17360.0 | ---- | | | | | 74.00 | 54.00 | | |
| 19840.0 | ---- | | | | | 74.00 | 54.00 | | |
| 22320.0 | ---- | | | | | 74.00 | 54.00 | | |
| 24800.0 | ---- | | | | | 74.00 | 54.00 | | |

Remark :

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency °
- (2) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms_and_conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgsonsite.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.

Radiated Spurious Emission Measurement Result (below 1GHz)

| | | | |
|-----------------------|-----------------------------------|-----------|---------------|
| Operation Mode | RX CH Low , BDR mode (worst case) | Test Date | Aug. 24, 2009 |
| Fundamental Frequency | 2402MHz | Test By | Jason |
| Temperature | 25 °C | Pol | Ver./Hor |
| Humidity | 65 % | | |

| Freq. (MHz) | Ant.Pol. H/V | Detector Mode (PK/QP) | Reading (dBuV) | Factor (dB) | Actual FS (dBuV/m) | Limit3m (dBuV/m) | Safe Margin (dB) |
|----------------|-----------------|-----------------------------|-------------------|----------------|-----------------------|---------------------|---------------------|
| 33.88 | V | Peak | 48.91 | -14.65 | 34.26 | 40.00 | -5.74 |
| 56.19 | V | Peak | 42.28 | -14.63 | 27.65 | 40.00 | -12.35 |
| 33.88 | H | Peak | 50.80 | -14.65 | 36.15 | 40.00 | -3.85 |
| 53.28 | H | Peak | 42.33 | -14.40 | 27.93 | 40.00 | -12.07 |

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz .
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

| | | | |
|-----------------------|-----------------------------------|-----------|---------------|
| Operation Mode | RX CH Mid , BDR mode (worst case) | Test Date | Aug. 24, 2009 |
| Fundamental Frequency | 2441MHz | Test By | Jason |
| Temperature | 25°C | Pol | Ver./Hor |
| Humidity | 65 % | | |

| Freq. (MHz) | Ant.Pol. H/V | Detector Mode (PK/QP) | Reading (dBuV) | Factor (dB) | Actual FS (dBuV/m) | Limit3m (dBuV/m) | Safe Margin (dB) |
|----------------|-----------------|-----------------------------|-------------------|----------------|-----------------------|---------------------|---------------------|
| 31.94 | V | Peak | 49.96 | -14.82 | 35.14 | 40.00 | -4.86 |
| 38.73 | V | Peak | 47.80 | -13.84 | 33.96 | 40.00 | -6.04 |
| 33.88 | H | Peak | 50.01 | -14.65 | 35.36 | 40.00 | -4.64 |
| 70.74 | H | Peak | 45.17 | -16.27 | 28.90 | 40.00 | -11.10 |

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz .
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

| | | | |
|-----------------------|------------------------------------|-----------|---------------|
| Operation Mode | RX CH High , BDR mode (worst case) | Test Date | Aug. 24, 2009 |
| Fundamental Frequency | 2480MHz | Test By | Jason |
| Temperature | 25 °C | Pol | Ver./Hor |
| Humidity | 65% | | |

| Freq. (MHz) | Ant.Pol. H/V | Detector Mode (PK/QP) | Reading (dBuV) | Factor (dB) | Actual FS (dBuV/m) | Limit3m (dBuV/m) | Safe Margin (dB) |
|----------------|-----------------|-----------------------------|-------------------|----------------|-----------------------|---------------------|---------------------|
| 33.88 | V | Peak | 48.65 | -14.65 | 34.00 | 40.00 | -6.00 |
| 75.59 | V | Peak | 46.05 | -17.13 | 28.92 | 40.00 | -11.08 |
| 33.88 | H | Peak | 50.71 | -14.65 | 36.06 | 40.00 | -3.94 |
| 53.28 | H | Peak | 41.73 | -14.40 | 27.33 | 40.00 | -12.67 |

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz .
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Radiated Spurious Emission Measurement Result (above 1GHz)

| | | | |
|-----------------------|-----------------------------------|-----------|---------------|
| Operation Mode | RX CH Low , BDR mode (worst case) | Test Date | Aug. 24, 2009 |
| Fundamental Frequency | 2402 MHz | Test By | Jason |
| Temperature | 25°C | Pol | Ver. |
| Humidity | 65 % | | |

| Freq. (MHz) | Peak Reading | AV Reading | Ant./CL CF(dB) | Actual FS | | Peak Limit | AV Limit | Margin (dB) | |
|----------------|-----------------|---------------|-------------------|------------------|----------------|---------------|-------------|----------------|------|
| | (dBuV) | (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | (dBuV/m) | (dBuV/m) | | |
| 1598.0 | 50.93 | --- | -5.48 | 45.45 | --- | 74.00 | 54.00 | -8.55 | Peak |
| 3203.5 | 35.98 | --- | 1.07 | 37.05 | --- | 74.00 | 54.00 | -16.95 | Peak |
| 4804.0 | ---- | | | | | 74.00 | 54.00 | | |
| 7206.0 | ---- | | | | | 74.00 | 54.00 | | |
| 9608.0 | ---- | | | | | 74.00 | 54.00 | | |
| 12010.0 | ---- | | | | | 74.00 | 54.00 | | |

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

| | | | |
|-----------------------|-----------------------------------|-----------|---------------|
| Operation Mode | RX CH Low , BDR mode (worst case) | Test Date | Aug. 24, 2009 |
| Fundamental Frequency | 2402 MHz | Test By | Jason |
| Temperature | 25 °C | Pol | Hor |
| Humidity | 65 % | | |

| Freq. (MHz) | Peak Reading | AV Reading | Ant./CL CF(dB) | Actual FS | | Peak Limit | AV Limit | Margin (dB) | |
|----------------|-----------------|---------------|-------------------|------------------|----------------|---------------|-------------|----------------|------|
| | (dBuV) | (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | (dBuV/m) | (dBuV/m) | | |
| 1338.0 | 38.44 | --- | -6.62 | 31.82 | --- | 74.00 | 54.00 | -22.18 | Peak |
| 1598.0 | 50.97 | --- | -5.48 | 45.49 | --- | 74.00 | 54.00 | -8.51 | Peak |
| 2391.0 | 37.26 | --- | -1.39 | 35.87 | --- | 74.00 | 54.00 | -18.13 | Peak |
| 3060.5 | 44.66 | --- | 0.64 | 45.30 | --- | 74.00 | 54.00 | -8.70 | Peak |
| 4804.0 | ---- | | | | | 74.00 | 54.00 | | |
| 7206.0 | ---- | | | | | 74.00 | 54.00 | | |
| 9608.0 | ---- | | | | | 74.00 | 54.00 | | |
| 12010.0 | ---- | | | | | 74.00 | 54.00 | | |

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

| | | | |
|-----------------------|-----------------------------------|-----------|---------------|
| Operation Mode | RX CH Mid , BDR mode (worst case) | Test Date | Aug. 24, 2009 |
| Fundamental Frequency | 2441 MHz | Test By | Jason |
| Temperature | 25 °C | Pol | Ver |
| Humidity | 65 % | | |

| Freq. (MHz) | Peak Reading | AV Reading | Ant./CL CF(dB) | Actual FS | | Peak Limit | AV Limit | Margin (dB) | |
|----------------|-----------------|---------------|-------------------|------------------|----------------|---------------|-------------|----------------|------|
| | (dBuV) | (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | (dBuV/m) | (dBuV/m) | | |
| 1630.5 | 50.47 | --- | -5.26 | 45.21 | --- | 74.00 | 54.00 | -8.79 | Peak |
| 2443.0 | 35.53 | --- | -1.12 | 34.41 | --- | 74.00 | 54.00 | -19.59 | Peak |
| 3158.0 | 37.89 | --- | 0.93 | 38.82 | --- | 74.00 | 54.00 | -15.18 | Peak |
| 4882.0 | ---- | | | | | 74.00 | 54.00 | | |
| 7323.0 | ---- | | | | | 74.00 | 54.00 | | |
| 9764.0 | ---- | | | | | 74.00 | 54.00 | | |
| 12205.0 | ---- | | | | | 74.00 | 54.00 | | |

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

| | | | |
|-----------------------|-----------------------------------|-----------|---------------|
| Operation Mode | RX CH Mid , BDR mode (worst case) | Test Date | Aug. 24, 2009 |
| Fundamental Frequency | 2441 MHz | Test By | Jason |
| Temperature | 25 °C | Pol | Hor |
| Humidity | 65% | | |

| Freq. (MHz) | Peak Reading | AV Reading | Ant./CL CF(dB) | Actual FS | | Peak Limit | AV Limit | Margin (dB) | |
|----------------|-----------------|---------------|-------------------|------------------|----------------|---------------|-------------|----------------|------|
| | (dBuV) | (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | (dBuV/m) | (dBuV/m) | | |
| 1630.5 | 51.34 | --- | -5.26 | 46.08 | --- | 74.00 | 54.00 | -7.92 | Peak |
| 2443.0 | 36.12 | --- | -1.12 | 35.00 | --- | 74.00 | 54.00 | -19.00 | Peak |
| 3158.0 | 43.57 | --- | 0.93 | 44.50 | --- | 74.00 | 54.00 | -9.50 | Peak |
| 3203.5 | 44.44 | --- | 1.07 | 45.51 | --- | 74.00 | 54.00 | -8.49 | Peak |
| 4882.0 | ---- | | | | | 74.00 | 54.00 | | |
| 7323.0 | ---- | | | | | 74.00 | 54.00 | | |
| 9764.0 | ---- | | | | | 74.00 | 54.00 | | |
| 12205.0 | ---- | | | | | 74.00 | 54.00 | | |

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

| | | | |
|-----------------------|------------------------------------|-----------|---------------|
| Operation Mode | RX CH High , BDR mode (worst case) | Test Date | Aug. 24, 2009 |
| Fundamental Frequency | 2480 MHz | Test By | Jason |
| Temperature | 25 °C | Pol | Ver |
| Humidity | 65 % | | |

| Freq. (MHz) | Peak Reading | AV Reading | Ant./CL CF(dB) | Actual FS | | Peak Limit | AV Limit | Margin (dB) | |
|----------------|-----------------|---------------|-------------------|------------------|----------------|---------------|-------------|----------------|------|
| | (dBuV) | (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | (dBuV/m) | (dBuV/m) | | |
| 1643.5 | 50.24 | --- | -5.22 | 45.02 | --- | 74.00 | 54.00 | -8.98 | Peak |
| 2943.5 | 37.92 | --- | 0.24 | 38.16 | --- | 74.00 | 54.00 | -15.84 | Peak |
| 3203.5 | 36.43 | --- | 1.07 | 37.50 | --- | 74.00 | 54.00 | -16.50 | Peak |
| 4960.0 | ---- | | | | | 74.00 | 54.00 | | |
| 7440.0 | ---- | | | | | 74.00 | 54.00 | | |
| 9920.0 | ---- | | | | | 74.00 | 54.00 | | |
| 12400.0 | ---- | | | | | 74.00 | 54.00 | | |

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

| | | | |
|-----------------------|------------------------------------|-----------|---------------|
| Operation Mode | RX CH High , BDR mode (worst case) | Test Date | Aug. 24, 2009 |
| Fundamental Frequency | 2480 MHz | Test By | Jason |
| Temperature | 25 °C | Pol | Hor |
| Humidity | 65 % | | |

| Freq. (MHz) | Peak Reading | AV Reading | Ant./CL CF(dB) | Actual FS | | Peak Limit | AV Limit | Margin (dB) | |
|----------------|-----------------|---------------|-------------------|------------------|----------------|---------------|-------------|----------------|------|
| | (dBuV) | (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | (dBuV/m) | (dBuV/m) | | |
| 1643.5 | 52.36 | --- | -5.22 | 47.14 | --- | 74.00 | 54.00 | -6.86 | Peak |
| 3073.5 | 45.06 | --- | 0.65 | 45.71 | --- | 74.00 | 54.00 | -8.29 | Peak |
| 3203.5 | 44.62 | --- | 1.07 | 45.69 | --- | 74.00 | 54.00 | -8.31 | Peak |
| 3431.0 | 40.72 | --- | 1.84 | 42.56 | --- | 74.00 | 54.00 | -11.44 | Peak |
| 4960.0 | ---- | | | | | 74.00 | 54.00 | | |
| 7440.0 | ---- | | | | | 74.00 | 54.00 | | |
| 9920.0 | ---- | | | | | 74.00 | 54.00 | | |
| 12400.0 | ---- | | | | | 74.00 | 54.00 | | |

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

9. FREQUENCY SEPARATION

9.1. Standard Applicable:

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 20dB bandwidth of the hopping channel, whichever is greater.

According to RSS 210 issue 6, A8.1(b), frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

9.2. Measurement Equipment Used:

Refer to section 6.2 for details.

9.3. Test Set-up:

Refer to section 6.3 for details.

9.4. Measurement Procedure:


1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel .
4. Set the spectrum analyzer as RBW,VBW=100KHz, Adjust Span to 3.0 MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

9.5. Measurement Result:

| Channel separation (MHz) | Limit | Result |
|-----------------------------|--|--------|
| 1 | $\geq 25\text{KHz}$ or 2/3 times 20dB bandwidth | PASS |

Note: Refer to next page for plots.

Frequency Separation Test Data

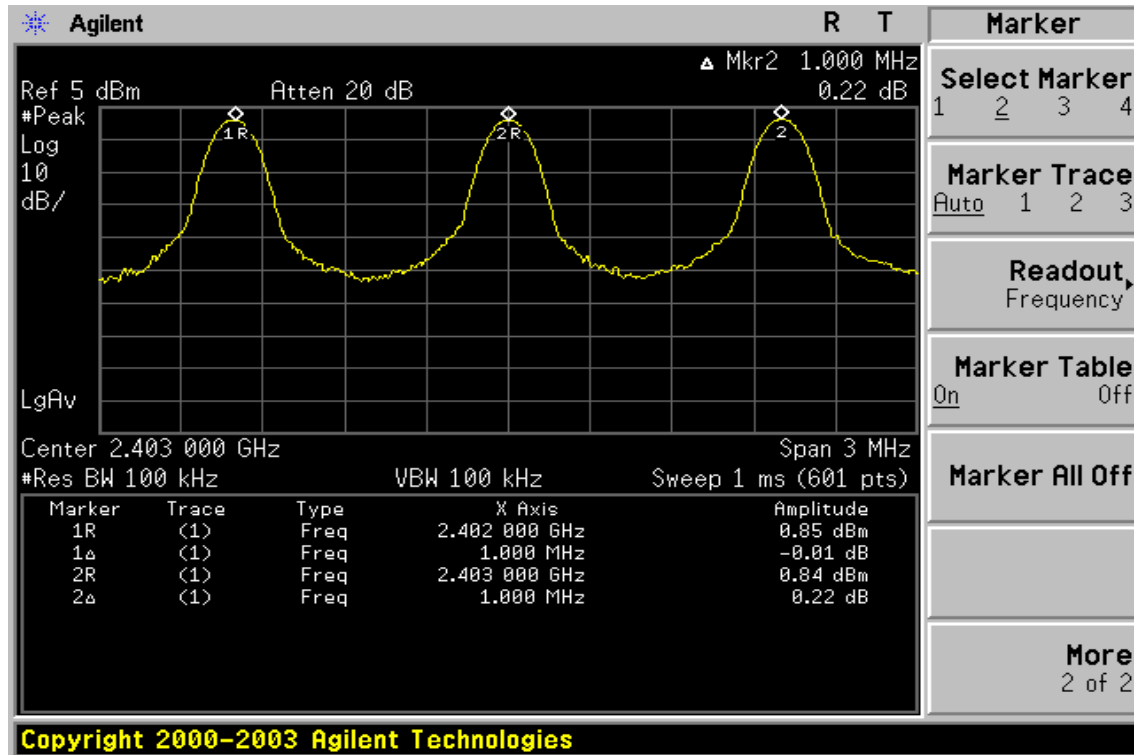

10. NUMBER OF HOPPING FREQUENCY

10.1. Standard Applicable:

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

According to RSS-210 issue 7, §A8.1(d), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, the maximum conducted output power shall not exceed 1 W. For all other frequency hopping systems, the maximum peak conducted output power shall not exceed 0.125 W.

10.2. Measurement Equipment Used:

Refer to section 6.2 for details.

10.3. Test Set-up:

Refer to section 6.3 for details.


10.4. Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
4. Set the spectrum analyzer as RBW=430KHz, VBW=1.3MHz,
5. Max hold, view and count how many channel in the band.


10.5. Measurement Result:

Note: Refer to next page for plots.

Channel Number 2.4 GHz – 2.441GHz

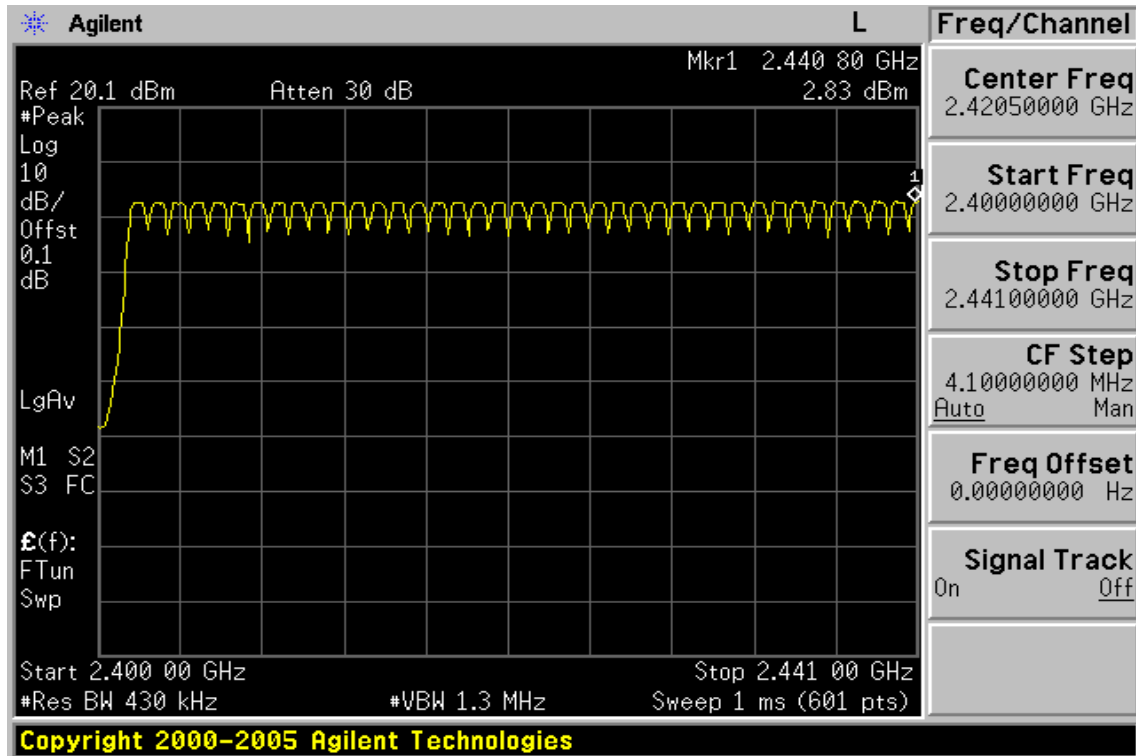

2.441 GHz – 2.4835GHz

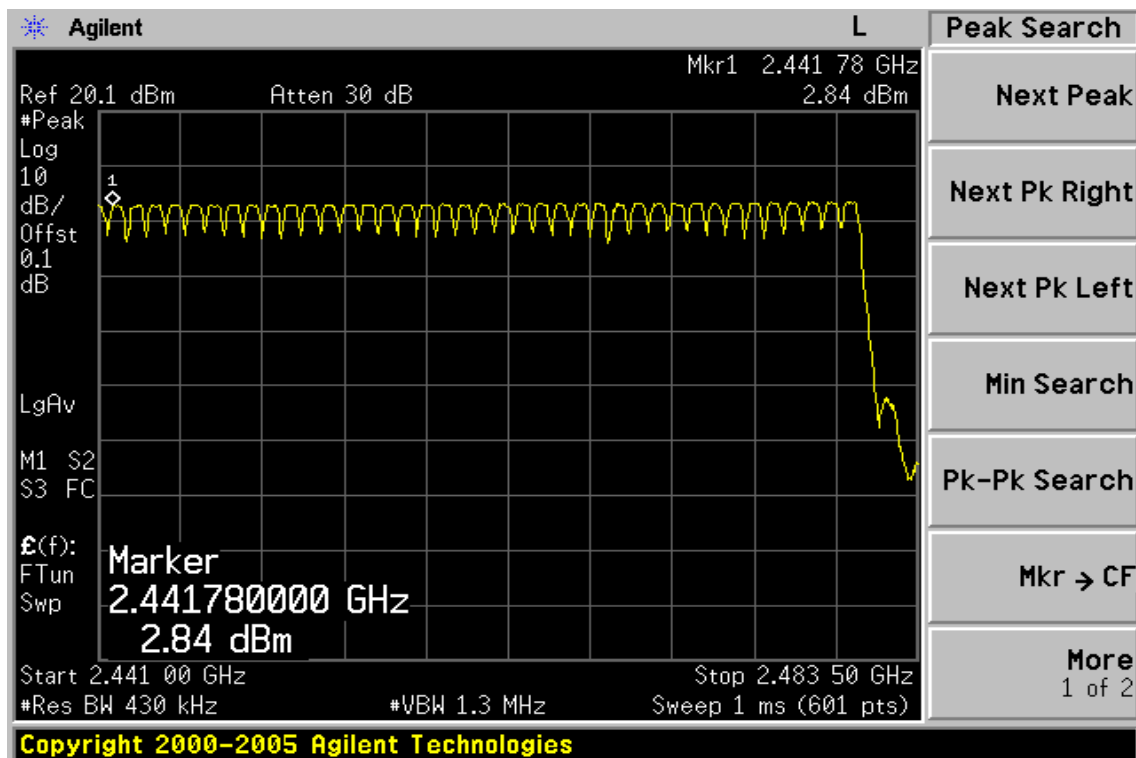

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms_and_conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.

11. TIME OF OCCUPANCY (DWELL TIME)

11.1. Standard Applicable:

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

According to RSS-210 issue 7, §A8.1(d), Frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that a minimum of 15 hopping channels are used.

11.2. Measurement Equipment Used:

Refer to section 6.2 for details.

11.3. Test Set-up:

Refer to section 6.3 for details.

11.4. Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Span = 0Hz , Adjust Sweep = 2~15ms.
5. Repeat above procedures until all frequency measured were complete.

11.5. Measurement Result:

A period time = $0.4 \text{ (ms)} * 79 = 31.6 \text{ (s)}$

CH Low: DH1 time slot = $0.417 \text{ (ms)} * (1600/(2*79)) * 31.6 = 133.44 \text{ (ms)}$

DH3 time slot = $1.667 \text{ (ms)} * (1600/(4*79)) * 31.6 = 266.72 \text{ (ms)}$

DH5 time slot = $2.925 \text{ (ms)} * (1600/(6*79)) * 31.6 = 312.00 \text{ (ms)}$

CH Mid: DH1 time slot = $0.417 \text{ (ms)} * (1600/(2*79)) * 31.6 = 133.44 \text{ (ms)}$

DH3 time slot = $1.667 \text{ (ms)} * (1600/(4*79)) * 31.6 = 266.72 \text{ (ms)}$

DH5 time slot = $2.925 \text{ (ms)} * (1600/(6*79)) * 31.6 = 312.00 \text{ (ms)}$


CH High: DH1 time slot = $0.417 \text{ (ms)} * (1600/(2*79)) * 31.6 = 133.44 \text{ (ms)}$

DH3 time slot = $1.667 \text{ (ms)} * (1600/(4*79)) * 31.6 = 266.72 \text{ (ms)}$


DH5 time slot = $2.925 \text{ (ms)} * (1600/(6*79)) * 31.6 = 312.00 \text{ (ms)}$

Note: Refer to next page for plots.

CH-Low DH1

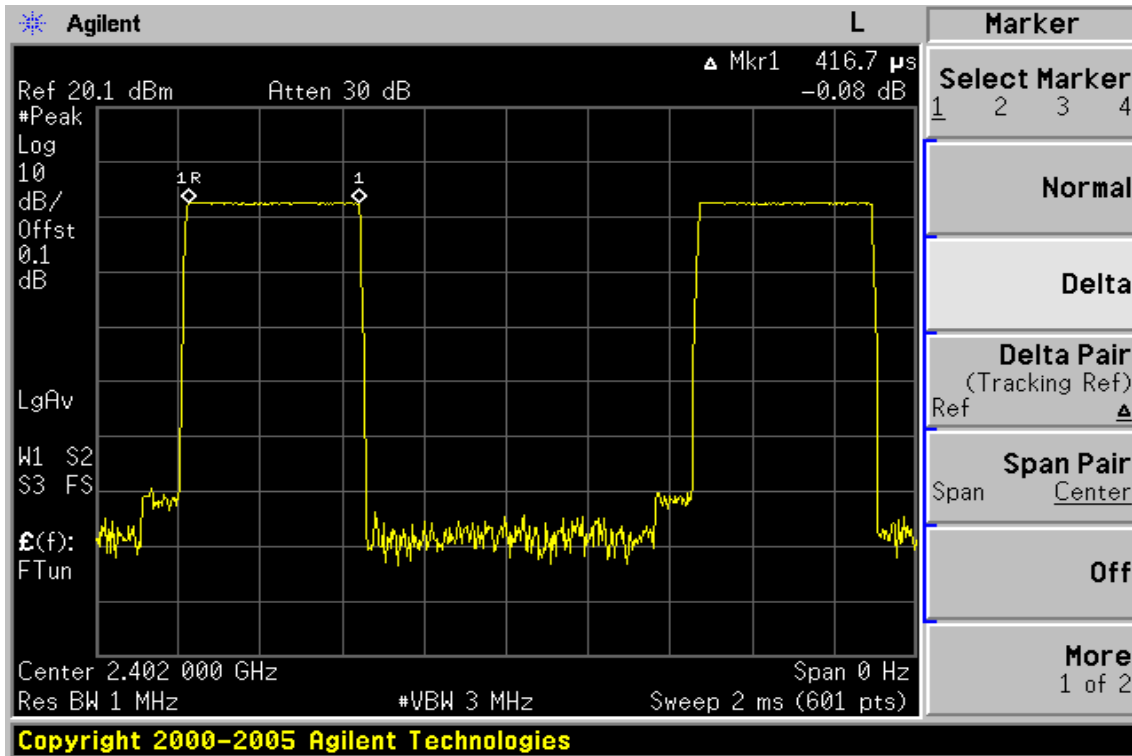


DH3

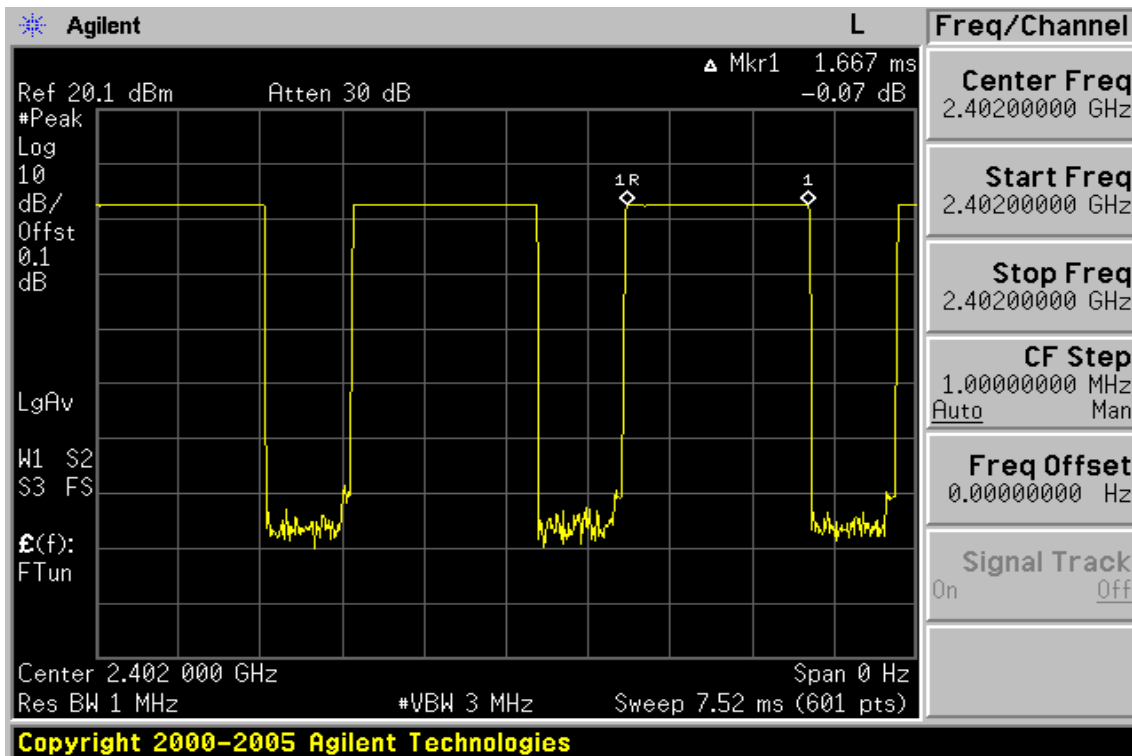

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。


This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms_and_conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.

DH5

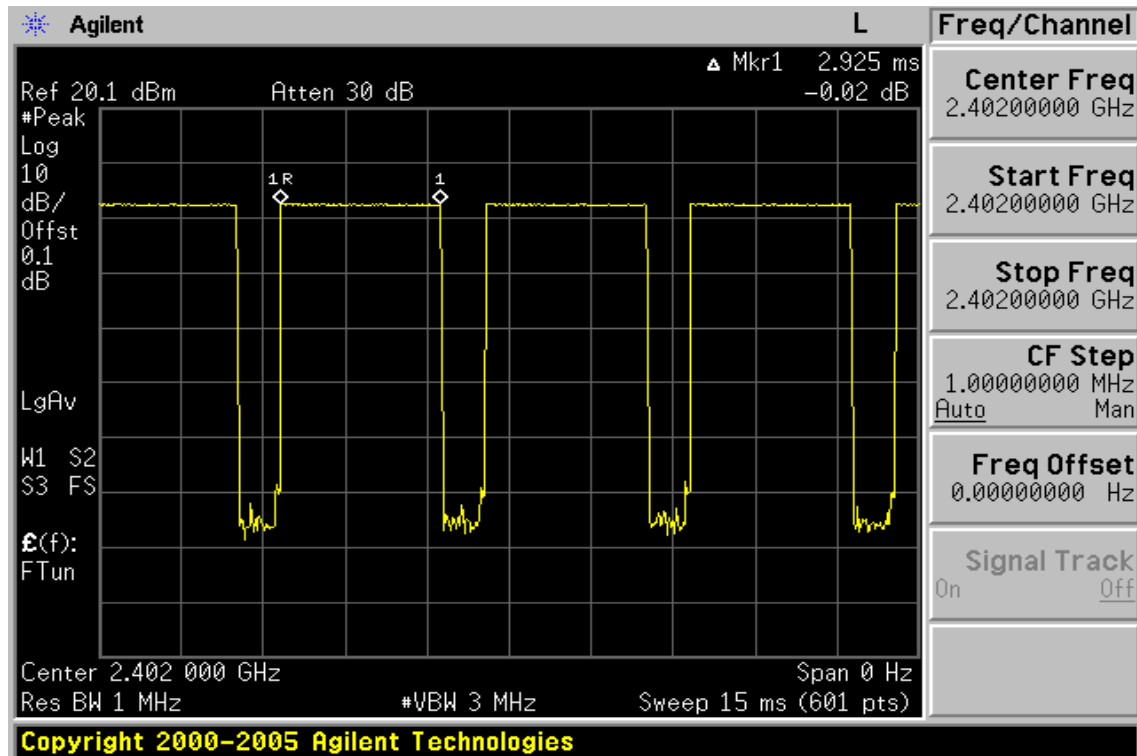

CH-Mid


DH1

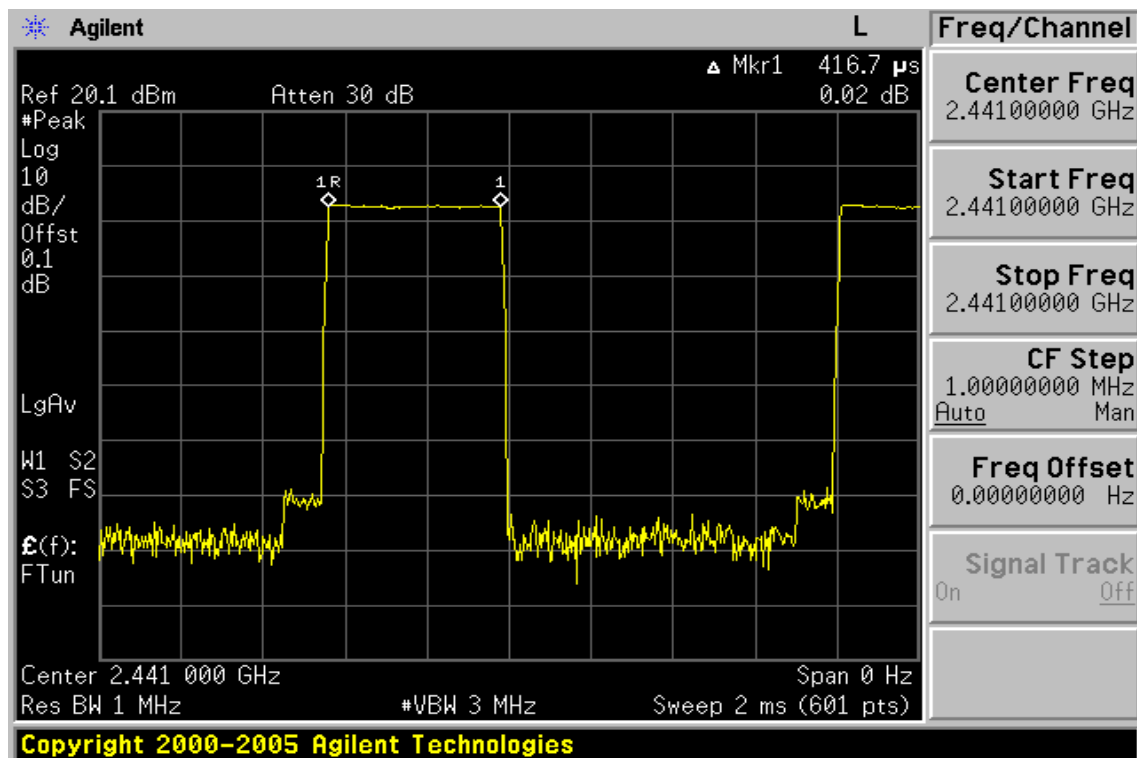


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms_and_conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.


DH3

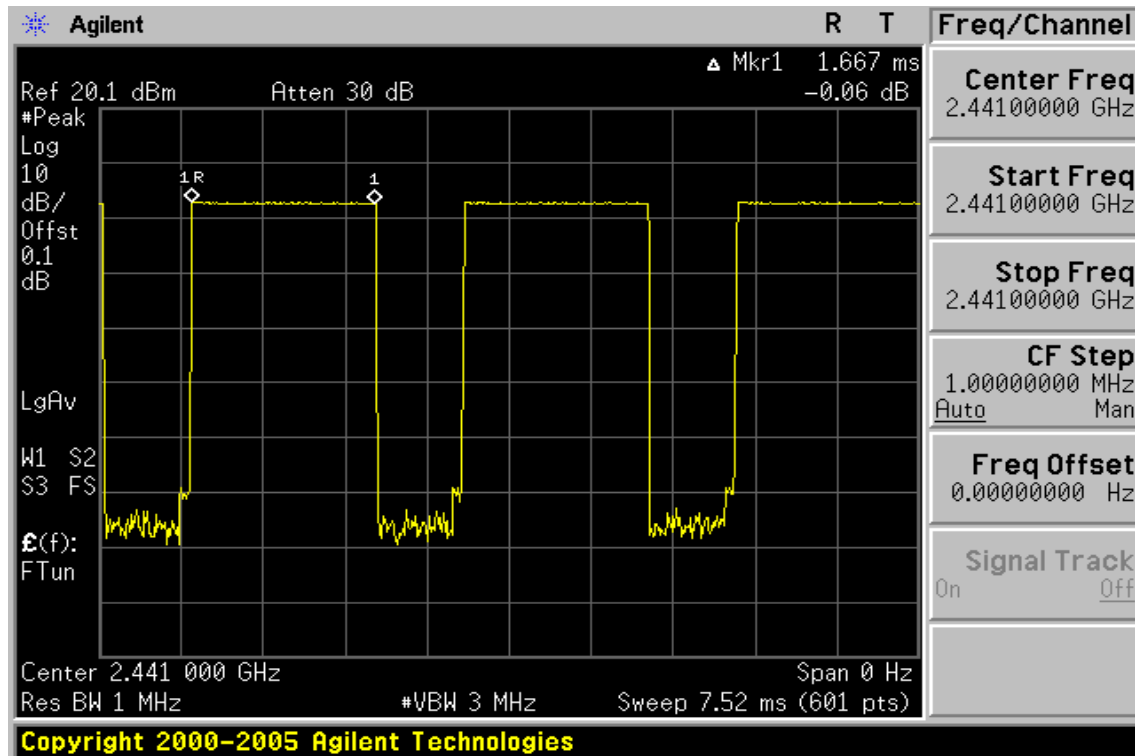


DH5

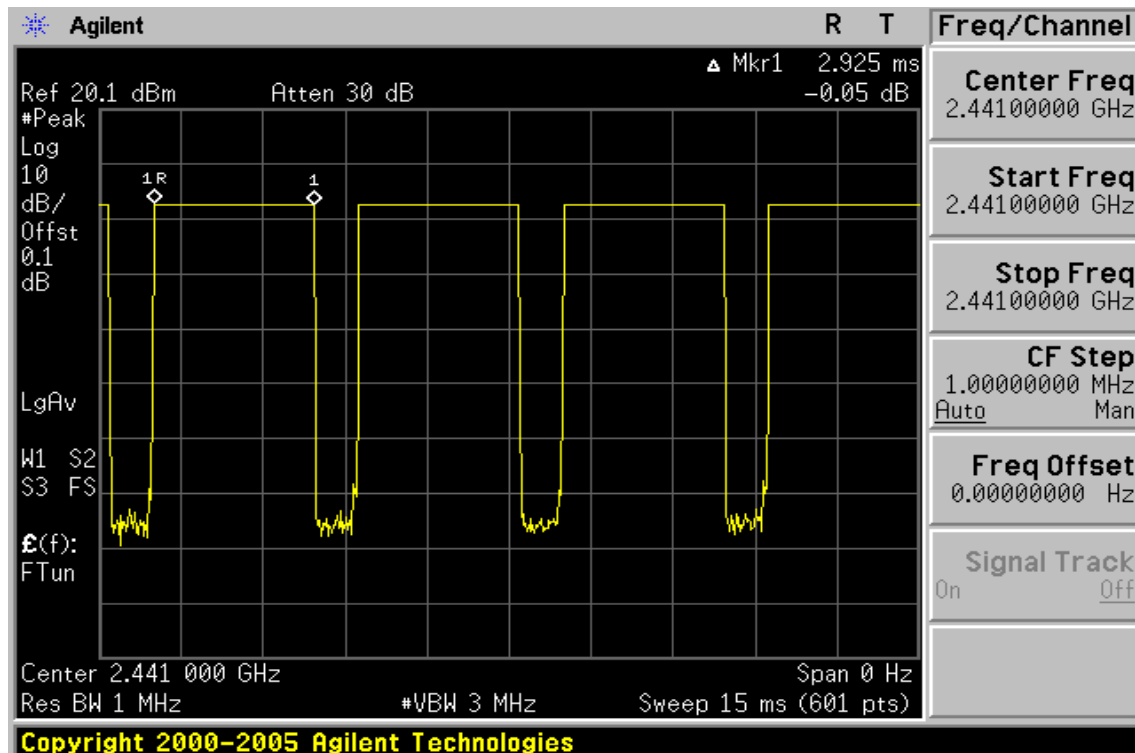

CH-High DH1

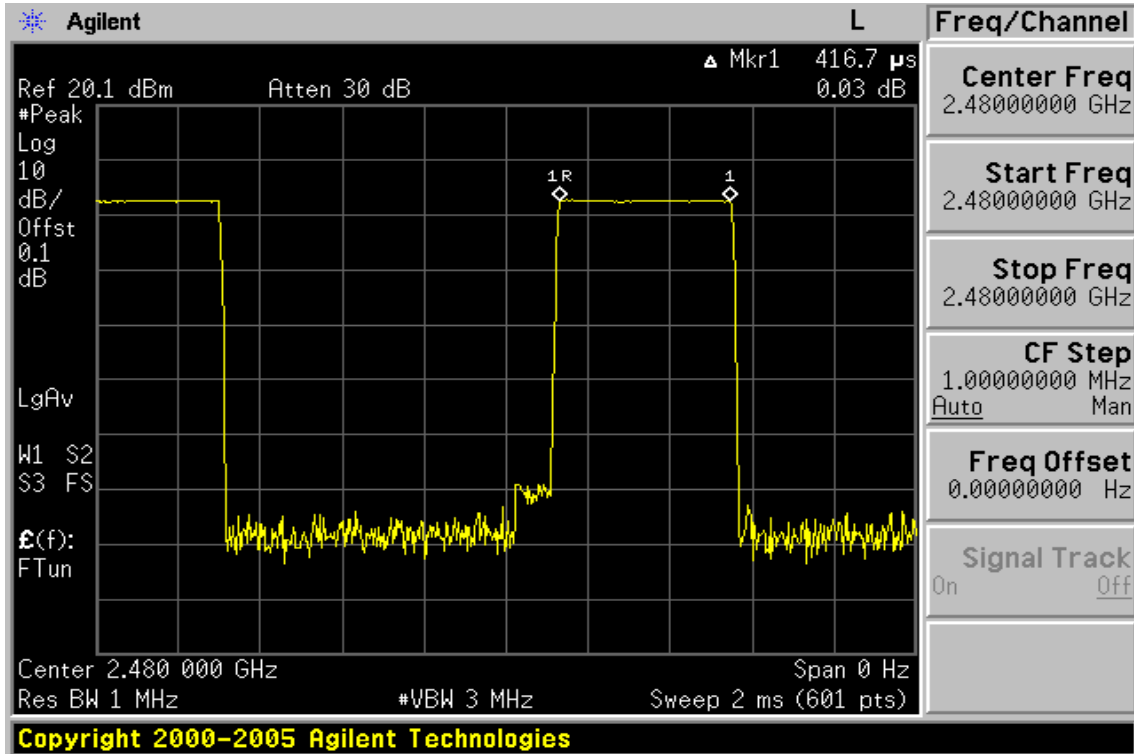


DH3

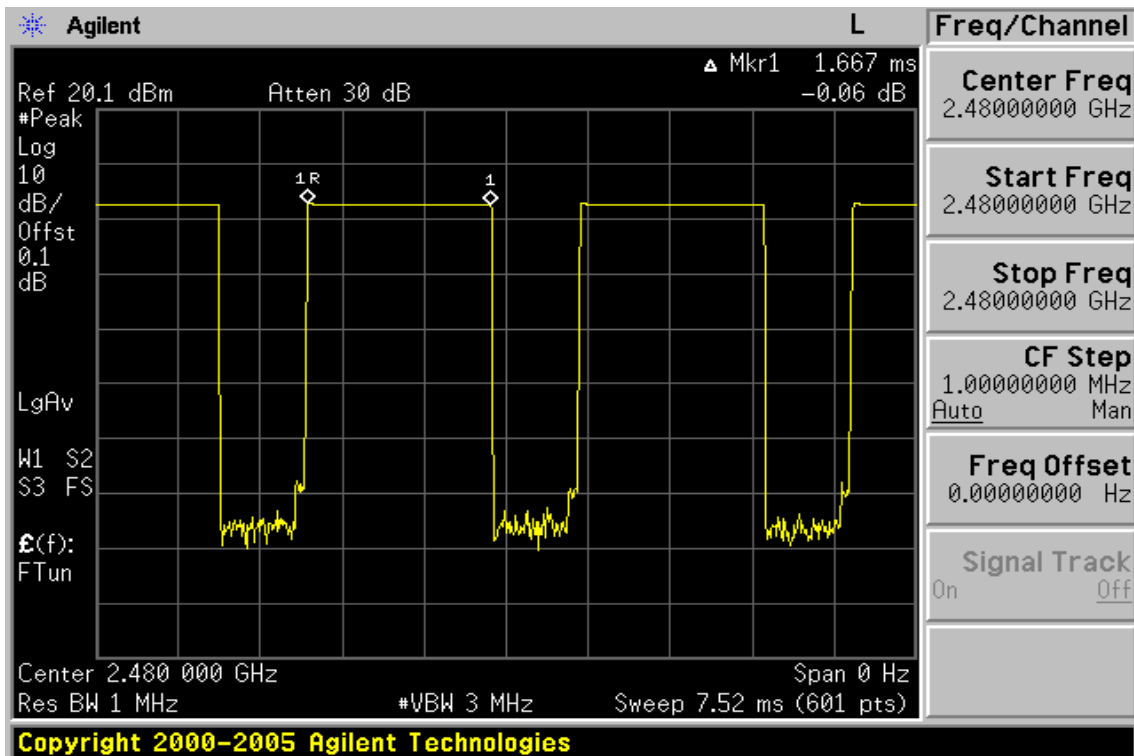

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms_and_conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.

DH5

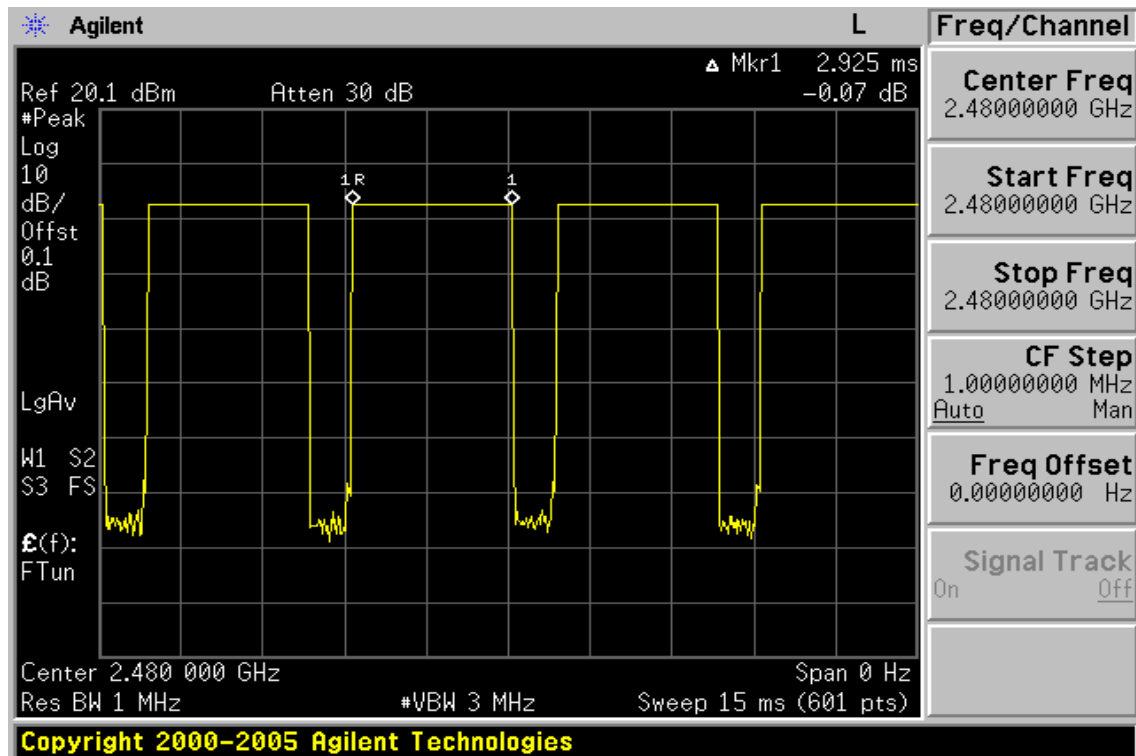

12. 20dB Bandwidth

12.1. Standard Applicable:

According to §15.247(a)(1), for frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

12.2. Measurement Equipment Used:

Refer to section 6.2 for details.

12.3. Test Set-up:

Refer to section 6.3 for details.

12.4. Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=10KHz (1 % of Bandwidth.), Span= 3MHz, Sweep=auto
4. Mark the peak frequency and -20dB (upper and lower) frequency.
5. Repeat above procedures until all frequency measured were complete.

12.5. Measurement Result:


BDR mode:

| CH | Bandwidth (kHz) |
|--------|--------------------|
| Lower | 920.699 |
| Mid | 917.903 |
| Higher | 919.544 |


EDR mode:

| CH | Bandwidth (MHz) | 2/3 Bandwidth (MHz) |
|--------|--------------------|------------------------|
| Lower | 1.251 | 0.834 |
| Mid | 1.251 | 0.834 |
| Higher | 1.258 | 0.839 |

BDR Mode 20dB Bandwidth Test Data CH-Low

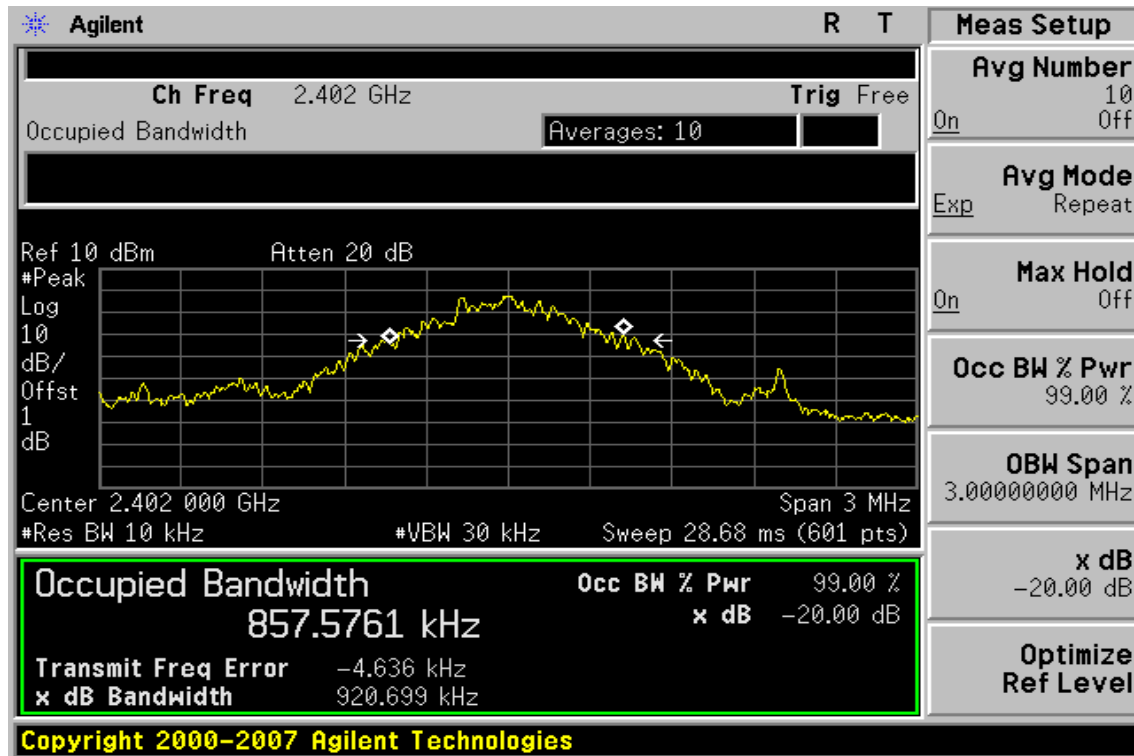


20dB Bandwidth Test Data CH-Mid

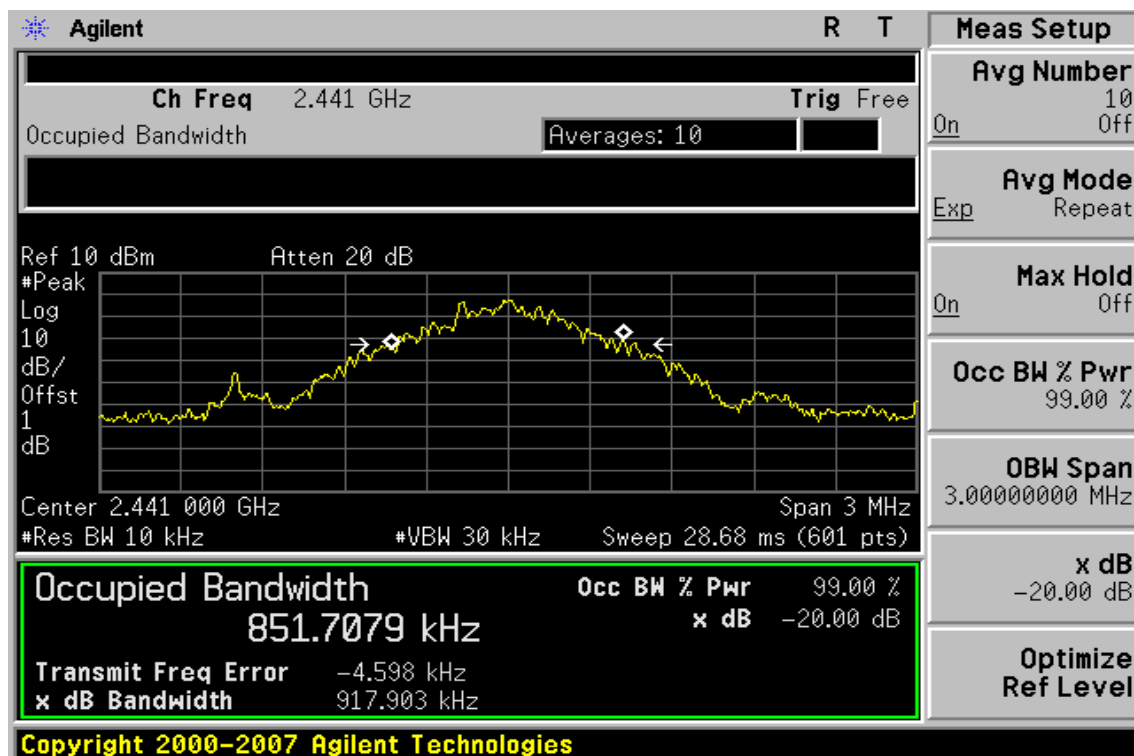


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms_and_conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.


20dB Bandwidth Test Data CH-High

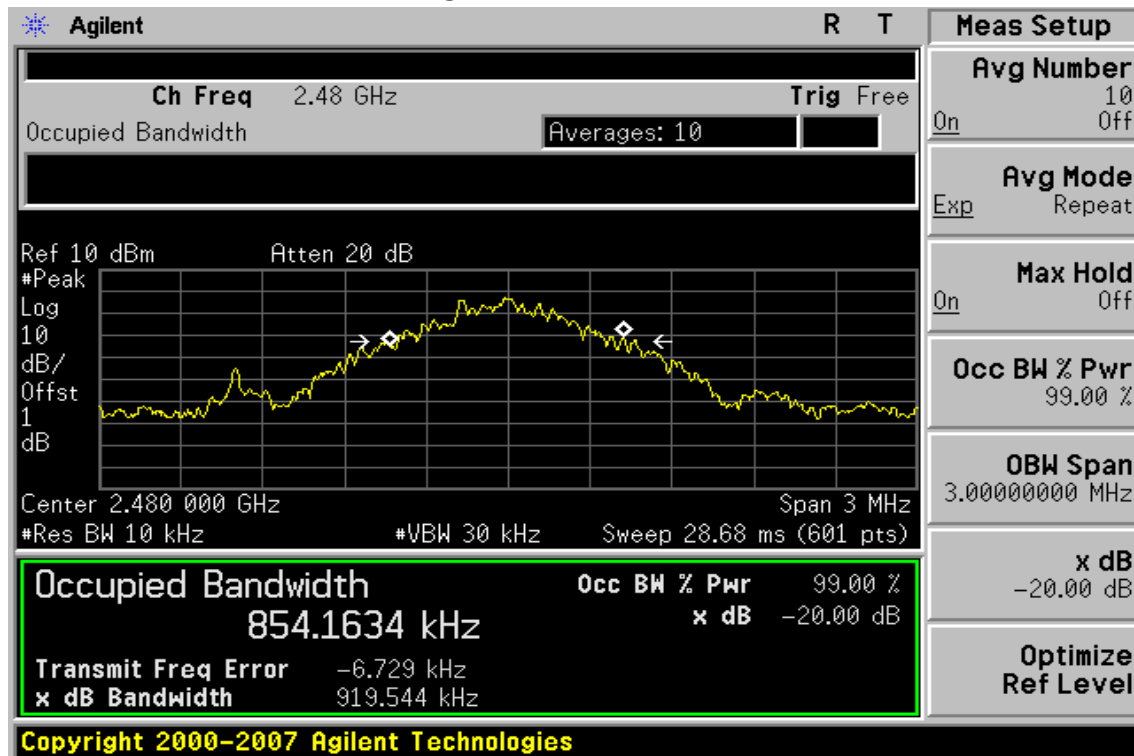

EDR Mode 20dB Bandwidth Test Data CH-Low

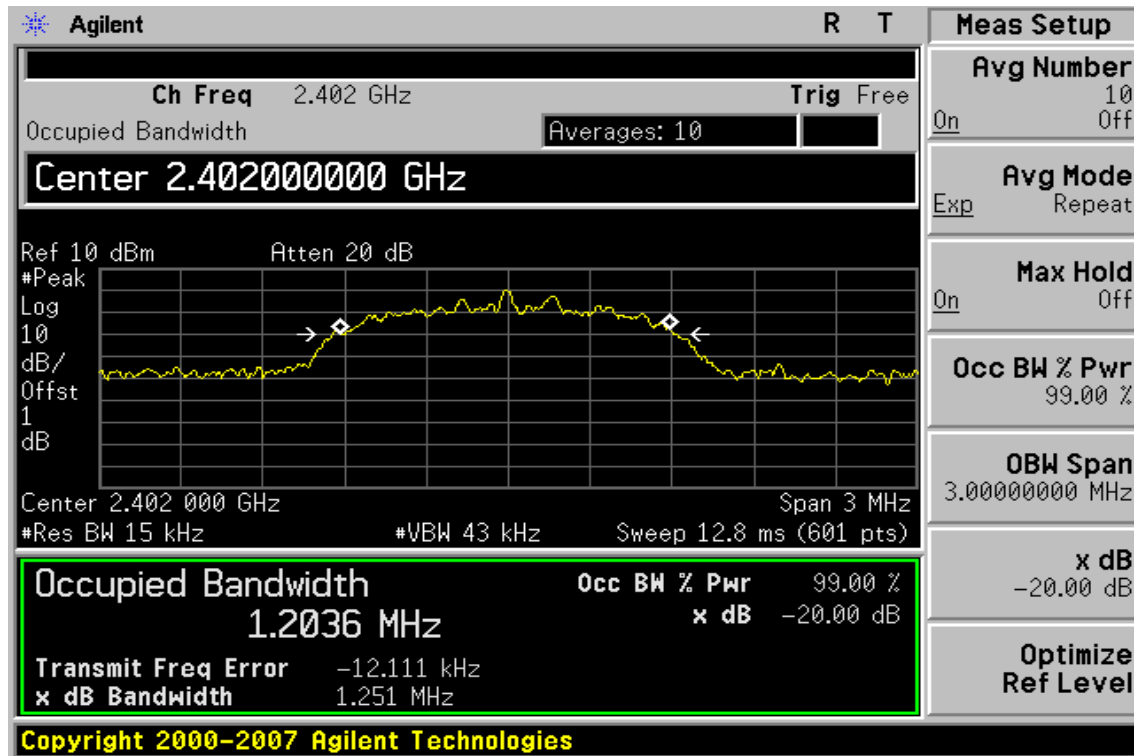


20dB Bandwidth Test Data CH-Mid

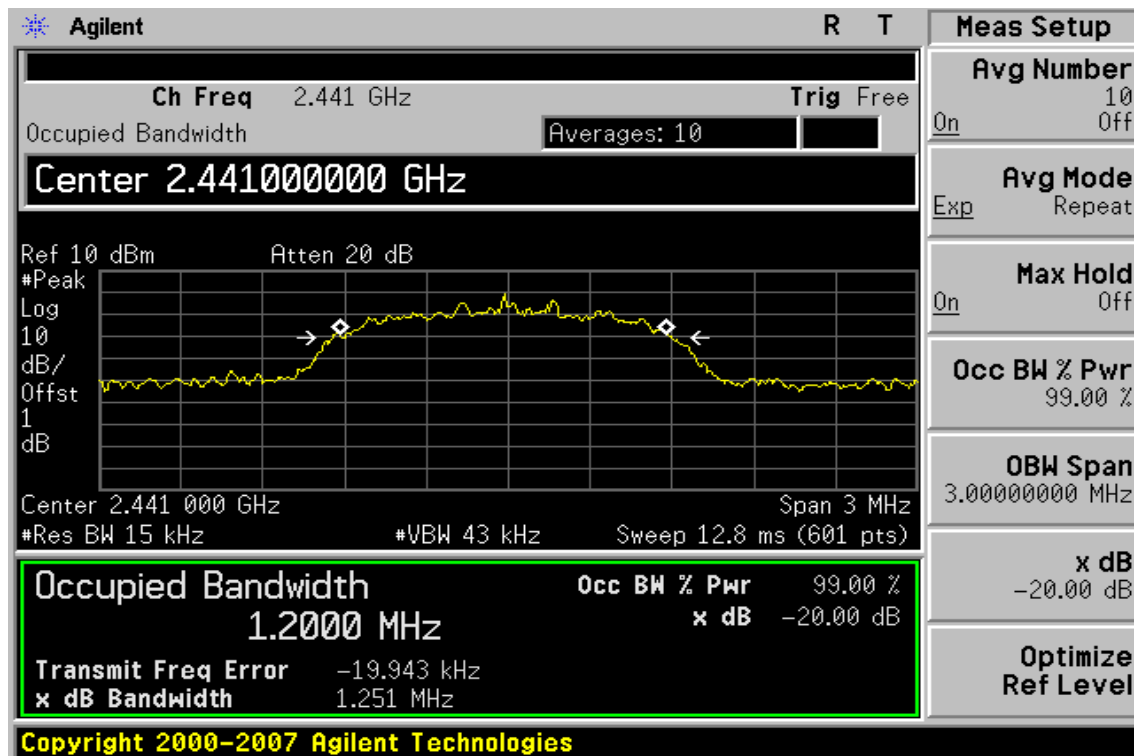

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms_and_conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.

20dB Bandwidth Test Data CH-High

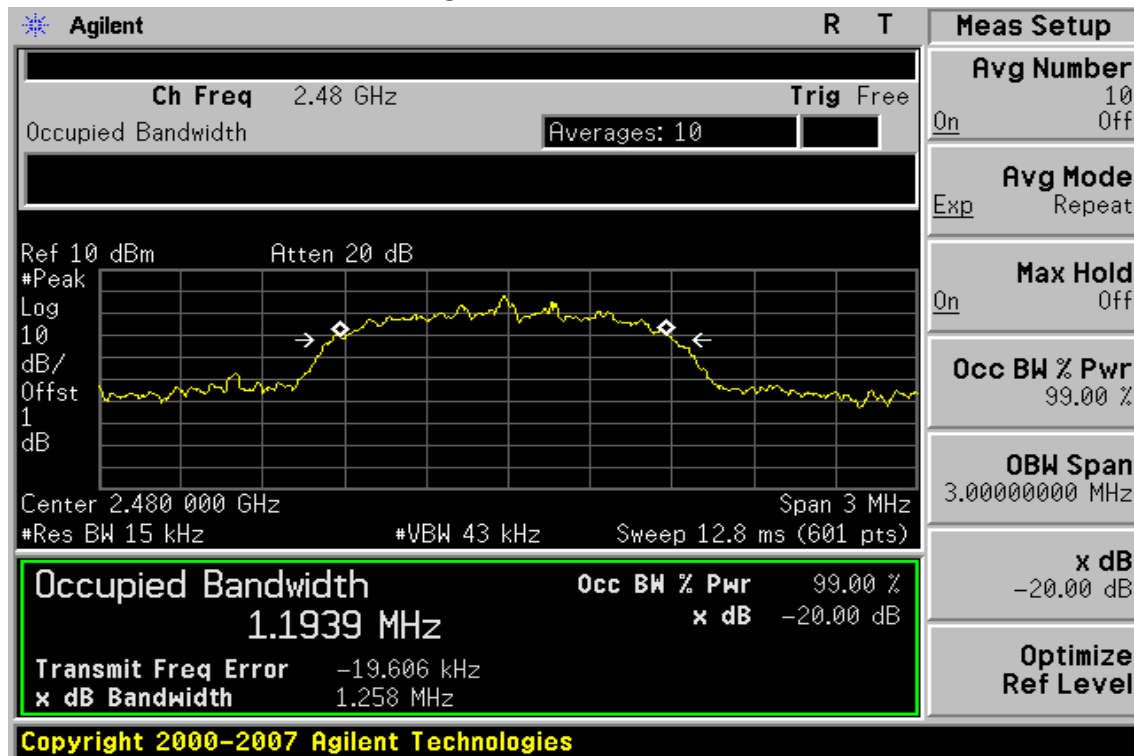

13. ANTENNA REQUIREMENT

13.1. Standard Applicable:

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

And according to §15.246(1), if transmitting antennas of directional gain greater than 6dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to RSS-GEN 7.1.4, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the highest-gain antenna of each combination of transmitter and antenna type for which certification is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type and having equal or lesser gain as an antenna that had been successfully tested for certification with the transmitter, will also be considered certified with the transmitter, and may be used and marketed with the transmitter. The manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power before using the power limits specified in RSS-210 or RSS-310 for devices of RF output powers of 10 milliwatts or less. For devices of output powers greater than 10 milliwatts, except devices subject to RSS-210 Annex 8 (Frequency Hopping and Digital Modulation Systems Operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz Bands) or RSS-210 Annex 9 (Local Area Network Devices), the total antenna gain shall be added to the measured RF output power before using the specified power limits. For devices subject to RSS-210 Annex 8 or Annex 9, the antenna gain shall not be added.

13.2. Antenna Connected Construction:

The directional gains of antenna used for transmitting is -0.7dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms_and_conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgsonsite.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.

14. 99% Bandwidth Measurement

14.1. Standard Applicable:

RSS-Gen §4.4.1, the transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

The span between the two recorded frequencies is the occupied bandwidth.

14.2. Measurement Equipment Used:

Refer to section 6.2 for details.

14.3. Test Set-up:

Refer to section 6.3 for details.

14.4. Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=1% of the approximate emission bandwidth, VBW = 3 times RBW, Span= approximately 20dB below the peak level. Sweep=auto
4. Turn on the 99% bandwidth function, max reading..
5. Repeat above procedures until all frequency measured were complete.

14.5. Measurement Result:

BDR Mode


| CH | Bandwidth (kHz) |
|--------|--------------------|
| Lower | 857.5761 |
| Mid | 851.7079 |
| Higher | 854.1634 |

EDR Mode


| CH | Bandwidth (MHz) |
|--------|--------------------|
| Lower | 1.2036 |
| Mid | 1.2000 |
| Higher | 1.1939 |

Note: Refer to next page for plots.

BDR Mode 99% Band Width Test Data CH-Low

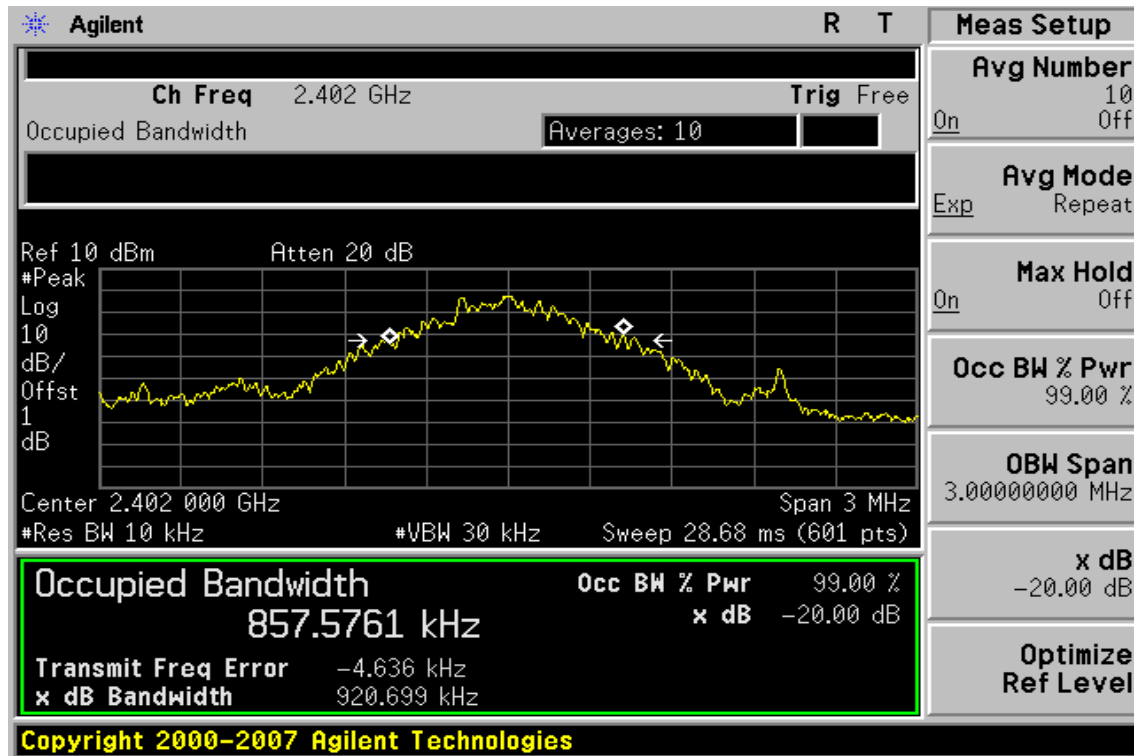

99% Band Width Test Data CH-Mid

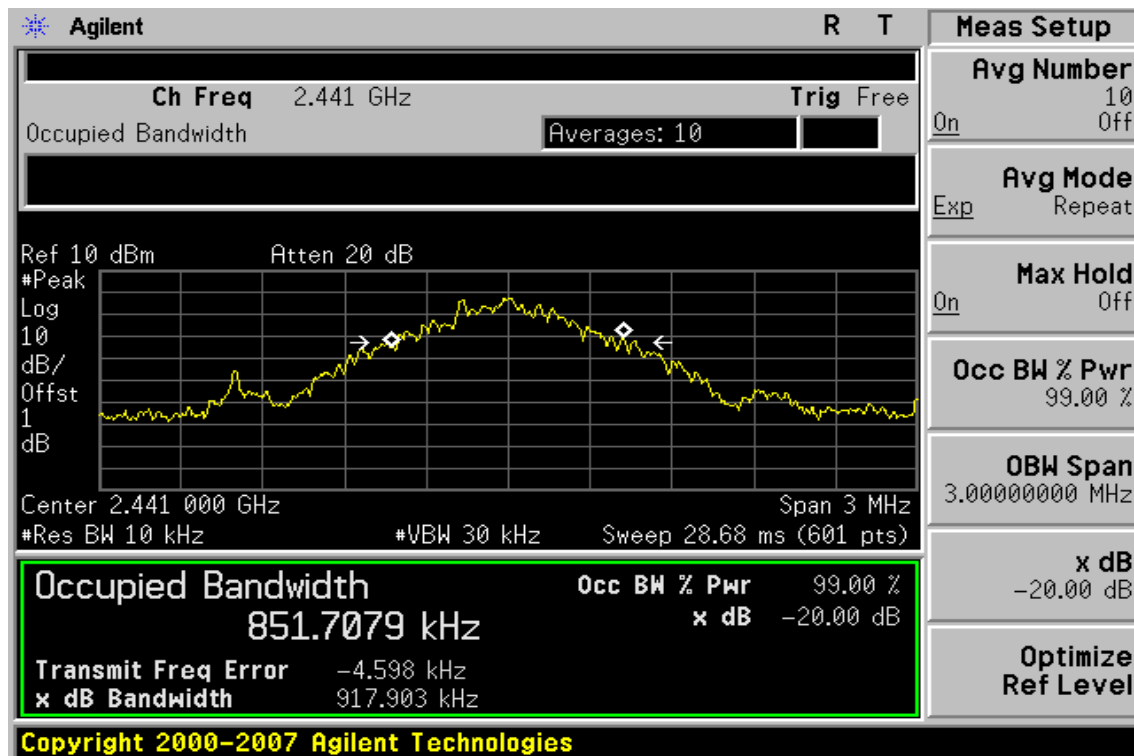

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。


This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms_and_conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.

99% Band Width Test Data CH-High




EDR Mode

99% Band Width Test Data CH-Low

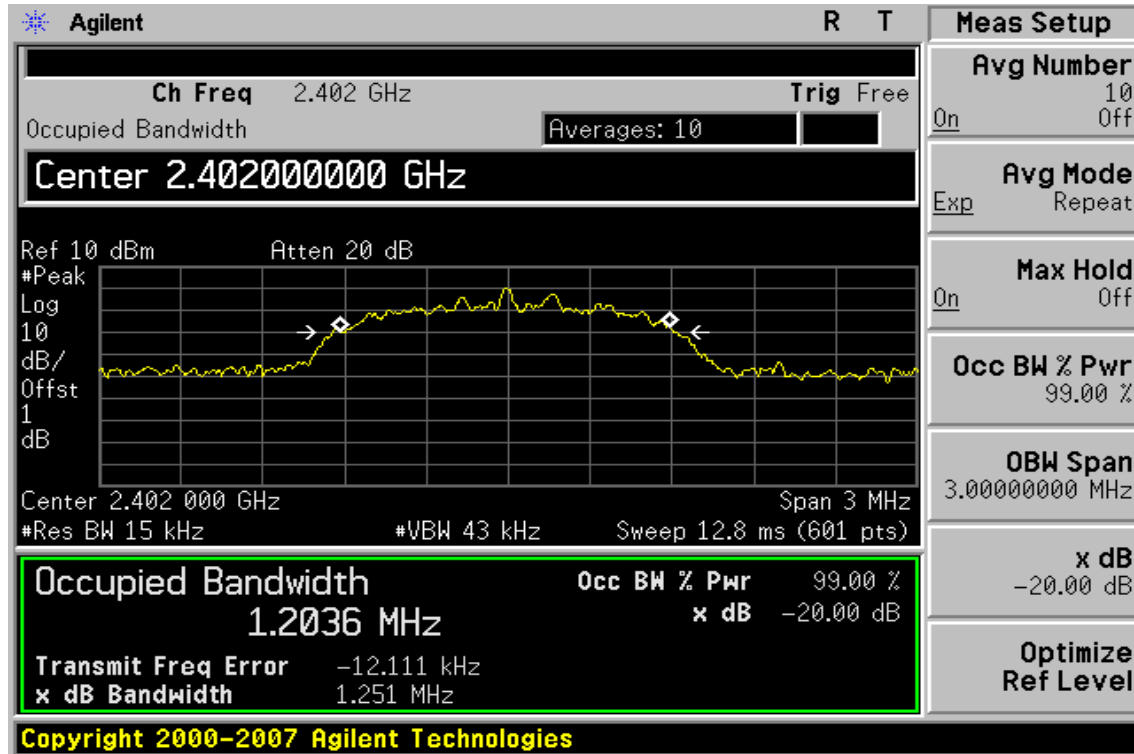

99% Band Width Test Data CH-Mid

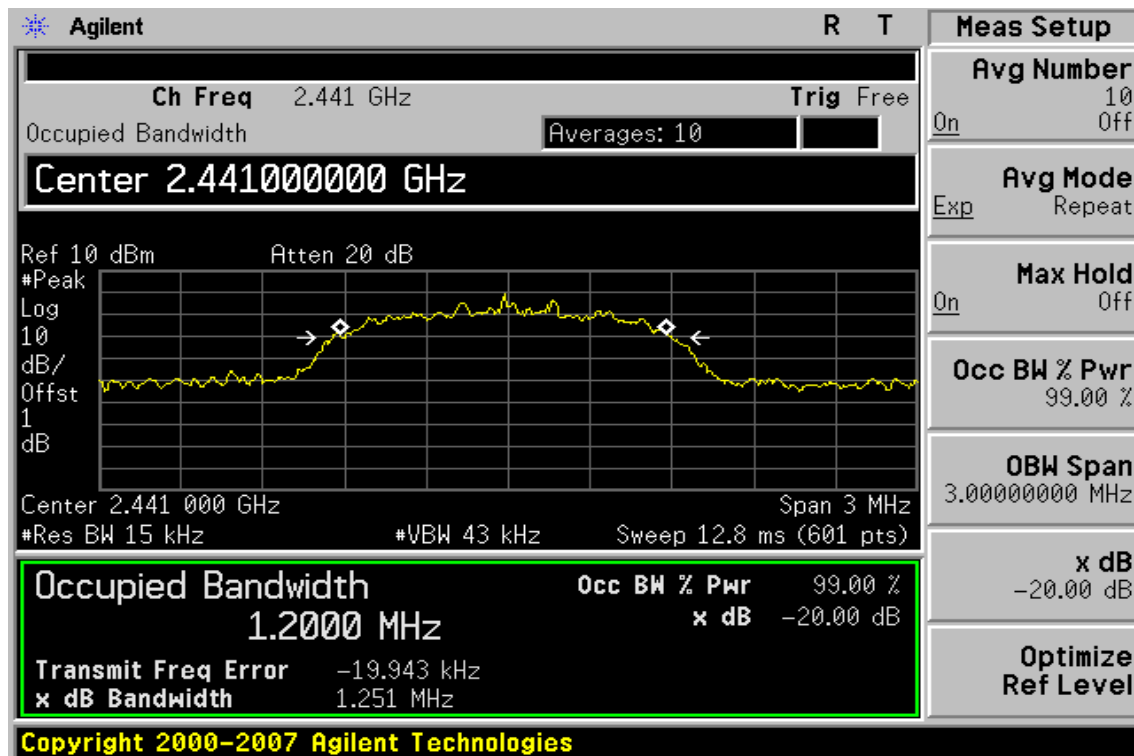

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms_and_conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.

99% Band Width Test Data CH-High

