
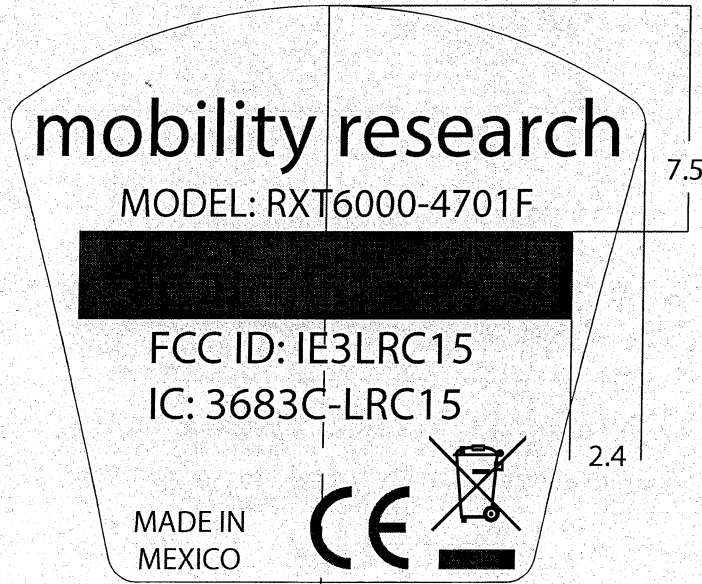

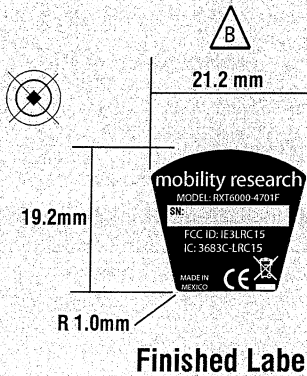


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL: 3M 7887, 0.05mm THK POLYESTER WITH PERMANENT REAR ADHESIVE.
2. AT TIME OF RECEIVER PRODUCTION, PRINT THE FOLLOWING SERIAL No. INFORMATION IN THE SERIAL NUMBER FIELD OF THE LABEL:
3. GENERAL TOLERANCES WILL BE  $\pm 0.2$

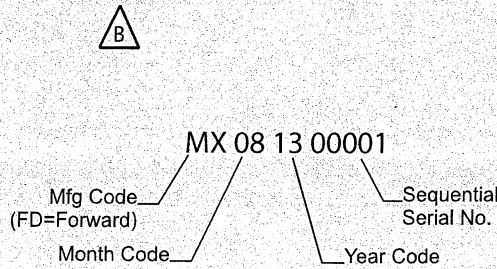

SCALE 4:1

**Environmental Notice** (January 2006)

Submit MSDS of use raw material before sample creation.

There do not contain the material as following in product or parts.

- 1. Cadmium and cadmium compound.
- 2. PBB (Polybrominated biphenyls) category and PBDE (Polybrominated diphenylethers) category.
- 3. Chlorinated paraffins (CP) Chlorine flame retarding material/plastics
- 4. Polychlorinated biphenyls (PCB) category.
- 5. Polychlorinated naphthalenes (PCN) category.
- 6. Polychlorinated terphenyls (PTC) category.
- 7. Organic tin compounds (Tributyl tin category, Triphenyl tin category)
- 8. Asbestos
- 9. Specific azo compounds
- 10. Formaldehyde
- 11. Polyvinyl chloride (PVC) and PVC blends.
- 12. Lead and lead compound.
- 13. Mercury and mercury compounds.
- 14. Hexavalent chromium compounds.


RoHS Compliant

| 13<br>DIMENSIONS<br>RANGE | TOLERANCES:<br>UNLESS OTHERWISE<br>SPECIFIED | UNIT: mm | APPROVED | CHECKED | DESIGNED | DESCRIPTION | LABEL PRODUCT | ISSUED      |
|---------------------------|----------------------------------------------|----------|----------|---------|----------|-------------|---------------|-------------|
| X < 1                     | $\pm 0.06$                                   |          |          |         |          |             | LCR           | MAR 18 2016 |
| 1 < X < 6                 | $\pm 0.10$                                   |          |          |         |          |             |               |             |
| 6 < X < 18                | $\pm 0.15$                                   |          |          |         |          |             |               |             |
| 18 < X < 50               | $\pm 0.20$                                   |          |          |         |          |             |               |             |
| 50 < X < 120              | $\pm 0.30$                                   |          |          |         |          |             |               |             |
| 120 < X < 250             | $\pm 0.40$                                   |          |          |         |          |             |               |             |
| 250 < X < 500             | $\pm 0.50$                                   |          |          |         |          |             |               |             |
| 500 < X                   | $\pm 0.60$                                   |          |          |         |          |             |               |             |

|                |                |                        |                |         |               |        |
|----------------|----------------|------------------------|----------------|---------|---------------|--------|
| APPROVED       | CHECKED        | DESIGNED               | DRAWING NO.    | SIZE: B | SHEET: 1 OF 1 | REV. B |
| JM<br>10/19/15 | JM<br>10/19/15 | D. Grieder<br>10/19/15 | 201RXT-023-01F |         |               |        |

SMK Manufacturing, Inc.

## AMR-LRC Label Location

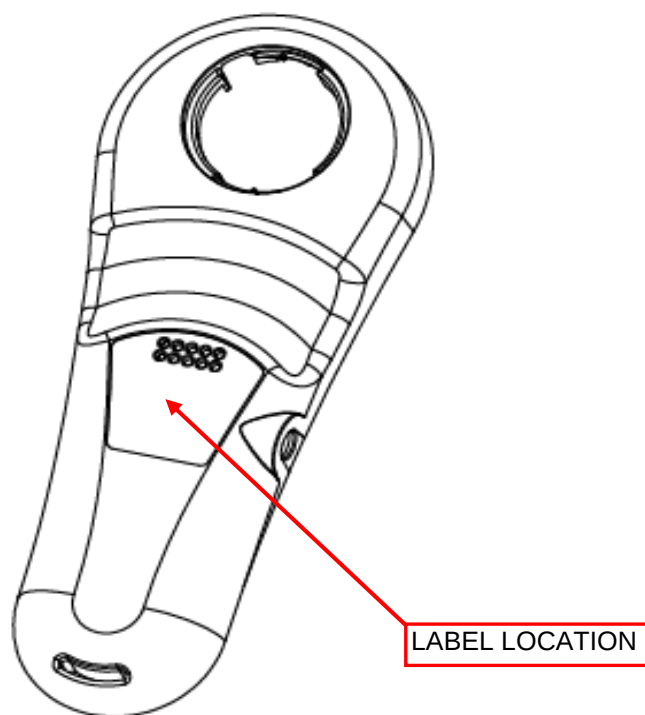

mobility research  
MODEL: EXT6000-4701F  
RM: MX 11 15 00003  
FCC ID: E318C15  
IC: 3683C-UHC15  
MADE IN MEXICO  
CE

10-03